



# FCC TEST REPORT

**Test report  
On Behalf of  
Winner Wave Limited  
For  
EZCast 2  
Model No.: EZCast 2, MiraScreen 4K, AnyCast 4K  
FCC ID: 2ADFS-CC911**

**Prepared for :** Winner Wave Limited  
4F-5, No.736, Jhongjheng Road, Jhonghe Dist., New Taipei City, Taiwan

**Prepared By :** Shenzhen HUAKE Testing Technology Co., Ltd.  
1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street,  
Bao'an District, Shenzhen City, China

**Date of Test:** May 25, 2018 ~ June 07, 2018

**Date of Report:** June 07, 2018

**Report Number:** HK180518317-E



## TEST RESULT CERTIFICATION

**Applicant's name** .....: Winner Wave Limited  
**Address** .....: 4F-5, No.736, Jhongjheng Road, Jhonghe Dist., New Taipei City,  
Taiwan  
**Manufacture's Name**.....: ShenZhen A-unit Electronics Co., Ltd.  
**Address** .....: 4th Floor, Building 8, Wisdom Land Business Park,  
Nanshan District, ShenZhen City, P.R. China

### Product description

**Trade Mark:** EZCast, MiraScreen  
**Product name**.....: EZCast 2  
**Model and/or type reference** .: MiraScreen 4K, AnyCast 4K

**Standards** .....: FCC Rules and Regulations Part 15 Subpart C Section 15.407  
ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Date of Test** .....:

**Date (s) of performance of tests** .....: May 25, 2018 ~ June 07, 2018

**Date of Issue**.....: June 07, 2018

**Test Result**.....: Pass

Testing Engineer :

(Gary Qian)

Technical Manager :

(Eden Hu)

Authorized Signatory :

(Jason Zhou)



## TABLE OF CONTENTS

<b>1. Test Result Summary .....</b>	<b>4</b>
1.1. TEST PROCEDURES AND RESULTS.....	4
1.2. TEST FACILITY .....	4
1.3. MEASUREMENT UNCERTAINTY .....	5
<b>2. EUT Description .....</b>	<b>6</b>
2.1. GENERAL DESCRIPTION OF EUT .....	6
2.2. OPERATION FREQUENCY EACH OF CHANNEL.....	7
2.3. OPERATION OF EUT DURING TESTING .....	7
2.4. DESCRIPTION OF TEST SETUP .....	8
<b>3. Genera Information .....</b>	<b>9</b>
3.1. TEST ENVIRONMENT AND MODE .....	9
3.2. DESCRIPTION OF SUPPORT UNITS .....	10
<b>4. Test Results and Measurement Data .....</b>	<b>11</b>
4.1. CONDUCTED EMISSION .....	11
4.2. MAXIMUM CONDUCTED OUTPUT POWER .....	15
4.3. 6dB EMISSION BANDWIDTH .....	19
4.4. 26dB BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....	25
4.5. POWER SPECTRAL DENSITY .....	37
4.6. BAND EDGE.....	54
4.7. SPURIOUS EMISSION .....	75
4.8. FREQUENCY STABILITY MEASUREMENT.....	91
4.9. ANTENNA REQUIREMENT .....	94
4.10. PHOTOGRAPHS OF TEST SETUP .....	95



## 1. Test Result Summary

### 1.1. TEST PROCEDURES AND RESULTS

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203	PASS
AC Power Line Conducted Emission	§15.207	PASS
Maximum Conducted Output Power	§15.407(a) §2.1046	PASS
6dB Emission Bandwidth	§15.407(e)	PASS
26dB Emission Bandwidth & 99% Occupied Bandwidth	§15.407(a) §2.1049	PASS
Power Spectral Density	§15.407(a)	PASS
Band edge	§15.407(a)	PASS
Radiated Emission	§15.407(a) §2.1053	PASS
Frequency Stability	§15.407(g) §2.1055	PASS

**Note:**

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

### 1.2. TEST FACILITY

Test Firm : Shenzhen HUAKE Testing Technology Co., Ltd.

Address 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China



### 1.3. Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	$\pm 2.56\text{dB}$
2	RF power, conducted	$\pm 0.12\text{dB}$
3	Spurious emissions, conducted	$\pm 0.11\text{dB}$
4	All emissions, radiated(<1G)	$\pm 3.92\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.28\text{dB}$
6	Temperature	$\pm 0.1^{\circ}\text{C}$
7	Humidity	$\pm 1.0\%$



## 2. EUT Description

### 2.1. GENERAL DESCRIPTION OF EUT

Equipment	EZCast 2
Model Name	EZCast 2
Serial No.	MiraScreen 4K, AnyCast 4K
Trade Mark	EZCast, MiraScreen
Model Difference	All model's the function, software and electric circuit are the same, only with a product color and model named different. Test sample model: EZC-5200BS.
FCC ID	<b>2ADFS-CC911</b>
Operation Frequency:	IEEE 802.11a/n/ac(HT20) 5.180GHz-5.240GHz IEEE 802.11n/ac(HT40) 5.190GHz-5.310GHz IEEE 802.11ac(HT80) 5.210GHz
Channel Bandwidth:	IEEE 802.11a/n/ac(HT20)5.745GHz-5.825GHz IEEE 802.11n/ac(HT40)5.755GHz-5.795GHz IEEE 802.11ac(HT80) 5.775GHz
Modulation Technology:	IEEE 802.11a/n/ac
Modulation Type	CCK/OFDM/DBPSK/DAPSK
Antenna Type	PCB Antenna
Antenna Gain	1dBi
Power Source	DC 5V 1A from Micro USB
Power Supply:	DC 5V 1A from Micro USB



## 2.2. Operation Frequency each of channel

802.11a/802.11n(HT20) 802.11ac(HT20)		802.11n(HT40)/ 802.11ac(HT40)		802.11ac(HT80)	
Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180	38	5190	42	5210
40	5200	46	5230	155	5775
44	5220	151	5755		
48	5240	159	5790		
149	5745				
153	5765				
157	5785				
161	5805				
165	5825				

**Note:**

*In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:*

## 2.3. Operation of EUT during testing

For 802.11a/n (HT20)/ac(HT20)

Band I (5150 - 5250 MHz)			Band IV (5725 - 5850 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
36	Low	5180	149	Low	5745
40	Mid	5200	157	Mid	5785
48	High	5240	165	High	5825

For 802.11n (HT40)/ ac(HT40)

Band I (5150 - 5250 MHz)			Band IV (5725 - 5850 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
38	Low	5190	151	Low	5755
46	High	5230	159	High	5795




For 802.11ac(HT80)

Band I (5150 - 5250 MHz)		Band IV (5725 - 5850 MHz)	
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
42	5210	155	5775

## 2.4. DESCRIPTION OF TEST SETUP

Operation of EUT during conducted testing and Radiation and Above1GHz Radiation testing:



- LCD monitor information  
Model: SE2417HG  
Input: AC120/60Hz  
Output: 5VDC, 1A





### 3. General Information

#### 3.1. Test environment and mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations(The value of duty cycle is 100%)
<p>The sample was placed 0.8m/1.5m for blow/above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y &amp; Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.</p>	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

**Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.**

Mode	Data rate
802.11a	6 Mbps
802.11n(HT20)	MCS0
802.11n(HT40)	MCS0
802.11ac(HT20)/ac(HT40)/ac(HT80)	/

**Final Test Mode:**

Operation mode:	Keep the EUT in continuous transmitting with modulation
-----------------	---



### 3.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

**Note:**

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*
- 3. For conducted measurements (Output Power, Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.*



## 4. Test Results and Measurement Data

### 4.1. Conducted Emission

#### 4.1.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2013														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	<div><p>Reference Plane</p><p>Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p></div>														
Test Mode:	Tx Mode														
Test Procedure:	<div><div>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</div><div>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</div><div>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.</div></div>														
Test Result:	PASS														



#### 4.1.2. Test Instruments

Conducted Emission Shielding Room Test Site (843)				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Receiver	R&S	ESCI 7	HKE-010	Sep. 27, 2018
LISN	R&S	ENV216	HKE-002	Sep. 27, 2018
Coax cable (9KHz-30MHz)	Times	381806-002	N/A	Sep. 27, 2018
Conducted test software	Tonscend	TS+ Rev 2.5.0.0	HKE-081	N/A

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).




#### 4.1.3. Test data

Remark: We tested three Channels in AC 120V/60Hz and AC 230V/50Hz, the worst case was recorded.

Please refer to following diagram for individual

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

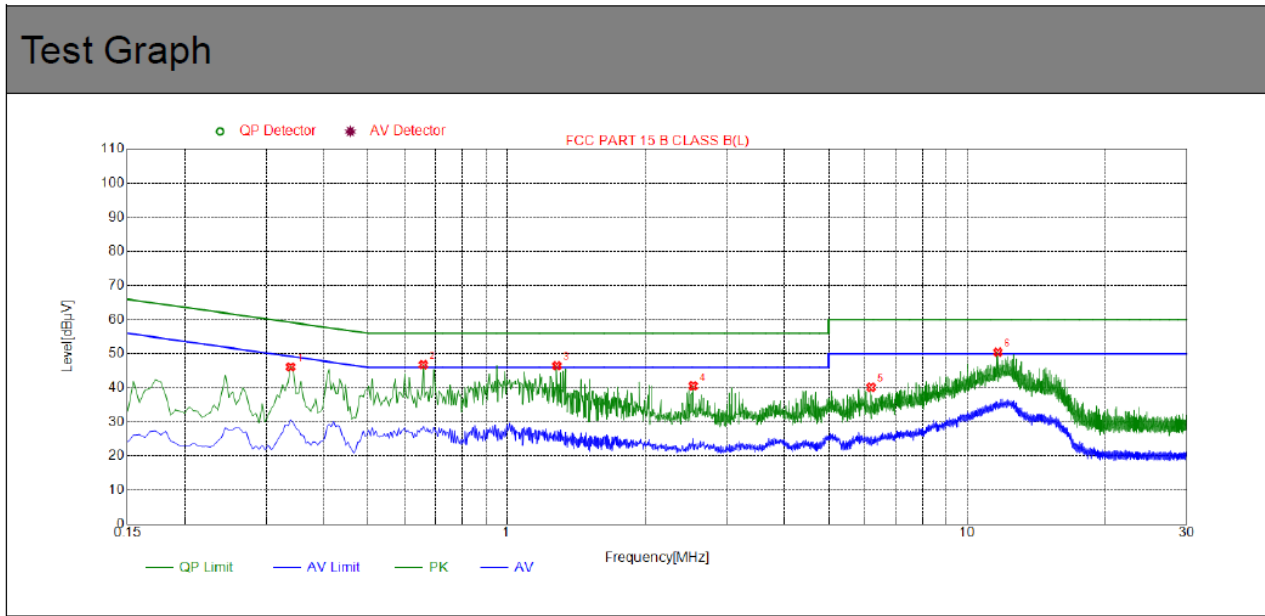


NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Detector
1	0.3390	46.14	10.03	59.23	13.09	PK
2	0.6585	46.78	10.05	56.00	9.22	PK
3	1.2840	46.49	10.09	56.00	9.51	PK
4	2.5395	40.57	10.20	56.00	15.43	PK
5	6.1845	40.15	10.22	60.00	19.85	PK
6	11.6655	50.48	9.99	60.00	9.52	PK

Remark:  $\text{Transd} = \text{Cable lose} + \text{Antenna factor} - \text{Pre-amplifier}$ ;  $\text{Margin} = \text{Limit} - \text{Level}$

**Notes:**

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3.  $\text{Final Level} = \text{Receiver Read level} + \text{LISN Factor} + \text{Cable Loss}$
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

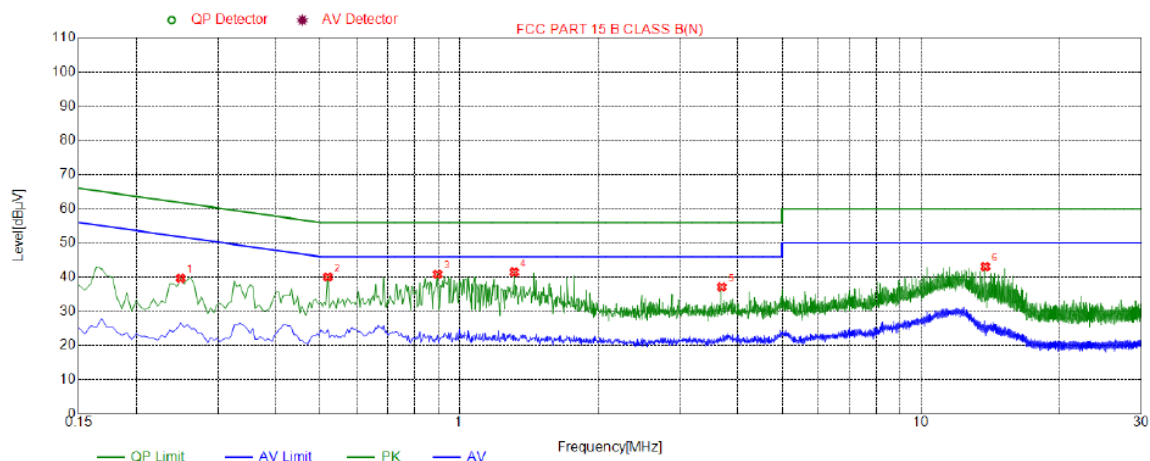**Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)****Test Graph**

NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Detector
1	0.2490	39.66	10.04	61.80	22.14	PK
2	0.5190	40.03	10.04	56.00	15.97	PK
3	0.8970	40.86	10.06	56.00	15.14	PK
4	1.3155	41.47	10.10	56.00	14.53	PK
5	3.7005	37.11	10.25	56.00	18.89	PK
6	13.7805	43.08	9.96	60.00	16.92	PK

Remark: Transd = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level


**Notes:**

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss.
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.



## 4.2. Maximum Conducted Output Power

### 4.2.1. Test Specification

<b>Test Requirement:</b>	FCC Part15 E Section 15.407(a)& Part 2 J Section 2.1046	
<b>Test Method:</b>	KDB789033 D02 General UNII Test Procedures New Rules v02.r01 Section E	
<b>Limit:</b>	Frequency Band (MHz)	Limit
	5150-5250	250mW for client devices
	5725-5850	1 W
<b>Test Setup:</b>	 <b>Power meter</b> <b>EUT</b>	
<b>Test Mode:</b>	Transmitting mode with modulation	
<b>Test Procedure:</b>	<ol style="list-style-type: none"><li>1. The testing follows the Measurement Procedure of KDB789033 D02 General UNII Test Procedures New Rules v01r04 Section E, 3, a</li><li>2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.</li><li>3. Set to the maximum power setting and enable the EUT transmit continuously.</li><li>5. Measure the conducted output power and record the results in the test report.</li></ol>	
<b>Test Result:</b>	PASS	
<b>Remark:</b>	Conducted output power= measurement power +10log(1/x) X is duty cycle=1, so 10log(1/1)=0 Conducted output power= measurement power	



#### 4.2.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Sep. 27, 2018
Power meter	Agilent	E4419B	HKE-085	Sep. 27, 2018
Power Sensor	Agilent	E9300A	HKE-086	Sep. 27, 2018
RF cable	Times	1-40G	HKE-034	Sep. 27, 2018
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Sep. 27, 2018

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).





#### 4.2.3. Test Data

Configuration Band I (5150 - 5250 MHz )				
Mode	Test channel	Maximum Conducted Output Power (dBm)	FCC Limit (dBm)	Result
11a	CH36	16.61	24	PASS
11a	CH40	16.42	24	PASS
11a	CH48	16.29	24	PASS
11n(HT20)	CH36	15.54	24	PASS
11n(HT20)	CH40	15.67	24	PASS
11n(HT20)	CH48	15.48	24	PASS
11n(HT40)	CH38	16.25	24	PASS
11n(HT40)	CH46	16.32	24	PASS
11ac(HT20)	CH36	15.89	24	PASS
11ac(HT20)	CH40	15.64	24	PASS
11ac(HT20)	CH48	15.55	24	PASS
11ac(HT40)	CH38	15.72	24	PASS
11ac(HT40)	CH46	15.38	24	PASS
11ac(HT80)	CH42	15.47	24	PASS




Configuration Band IV (5725 - 5850 MHz )				
Mode	Test channel	Maximum Conducted Output Power (dBm)	FCC Limit (dBm)	Result
11a	CH149	16.38	30	PASS
11a	CH157	16.07	30	PASS
11a	CH165	16.24	30	PASS
11n (HT20)	CH149	15.84	30	PASS
11n (HT20)	CH157	15.77	30	PASS
11n (HT20)	CH165	15.62	30	PASS
11n (HT40)	CH151	16.27	30	PASS
11n (HT40)	CH159	16.35	30	PASS
11ac(HT20)	CH149	15.63	30	PASS
11ac(HT20)	CH157	15.49	30	PASS
11ac(HT20)	CH165	15.51	30	PASS
11ac(HT40)	CH151	16.34	30	PASS
11ac(HT40)	CH159	15.72	30	PASS
11ac(HT80)	CH155	16.16	30	PASS



### 4.3. 6dB Emission Bandwidth

#### 4.3.1. Test Specification

<b>Test Requirement:</b>	FCC CFR47 Part 15 Section 15.407(e)& Part 2 J Section 2.1049
<b>Test Method:</b>	KDB789033 D02 General UNII Test Procedures New Rules v01r04 Section C
<b>Limit:</b>	>500kHz
<b>Test Setup:</b>	 Spectrum Analyzer                      EUT
<b>Test Mode:</b>	Transmitting mode with modulation
<b>Test Procedure:</b>	<ol style="list-style-type: none"><li>1. KDB789033 D02 General UNII Test Procedures New Rules v01r04 Section C</li><li>2. Set to the maximum power setting and enable the EUT transmit continuously.</li><li>3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.</li><li>4. Measure and record the results in the test report.</li></ol>
<b>Test Result:</b>	PASS

#### 4.3.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Sep. 27, 2018
RF cable	Times	1-40G	HKE-034	Sep. 27, 2018
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Sep. 27, 2018

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

**4.3.3. Test data**


<b>Band IV (5725 - 5850 MHz )</b>					
Mode	Test channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)	Result
11a	CH149	5745	17.06	0.5	PASS
11a	CH157	5785	16.35	0.5	PASS
11a	CH161	5825	16.66	0.5	PASS
11n(HT20)	CH149	5745	17.29	0.5	PASS
11n(HT20)	CH157	5785	16.97	0.5	PASS
11n(HT20)	CH161	5825	17.08	0.5	PASS
11n(HT40)	CH151	5755	35.27	0.5	PASS
11n(HT40)	CH159	5795	35.25	0.5	PASS
11ac(HT20)	CH149	5745	17.06	0.5	PASS
11ac(HT20)	CH157	5785	17.29	0.5	PASS
11ac(HT20)	CH165	5825	17.00	0.5	PASS
11ac(HT40)	CH151	5755	35.54	0.5	PASS
11ac(HT40)	CH159	5795	35.50	0.5	PASS
11ac(HT80)	CH155	5755	75.07	0.5	PASS

Test plots as follows:




## Band IV (5725 – 5850 MHz)



802.11a

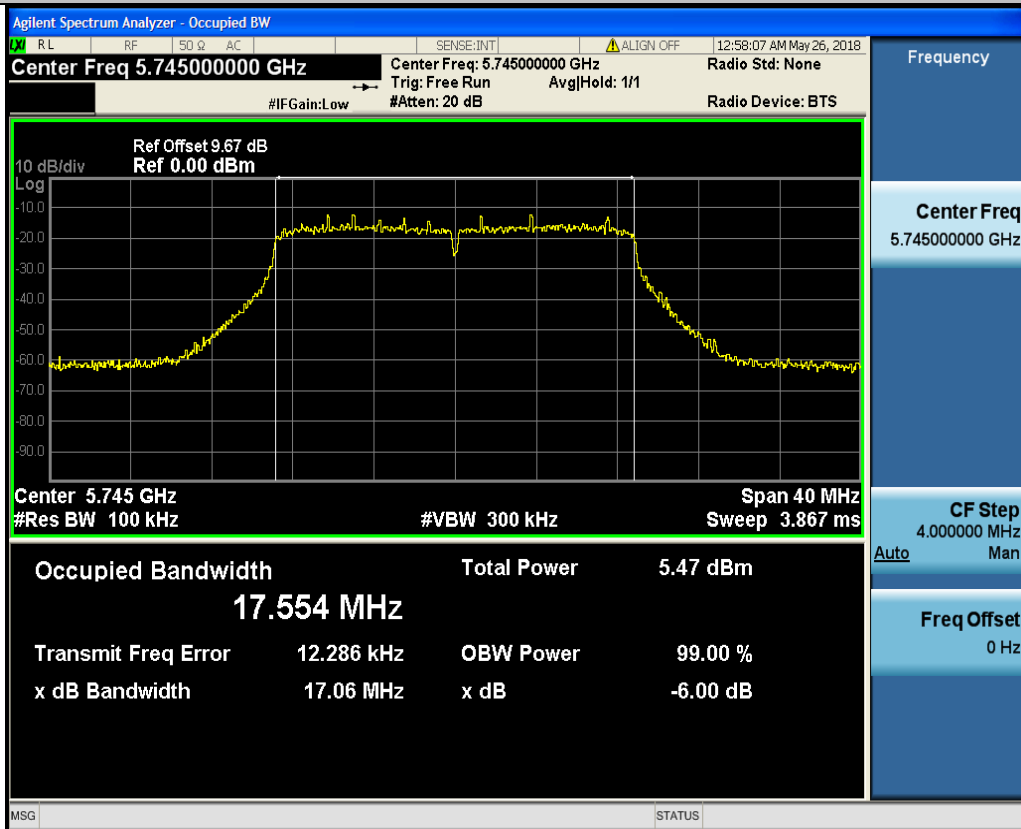


Low

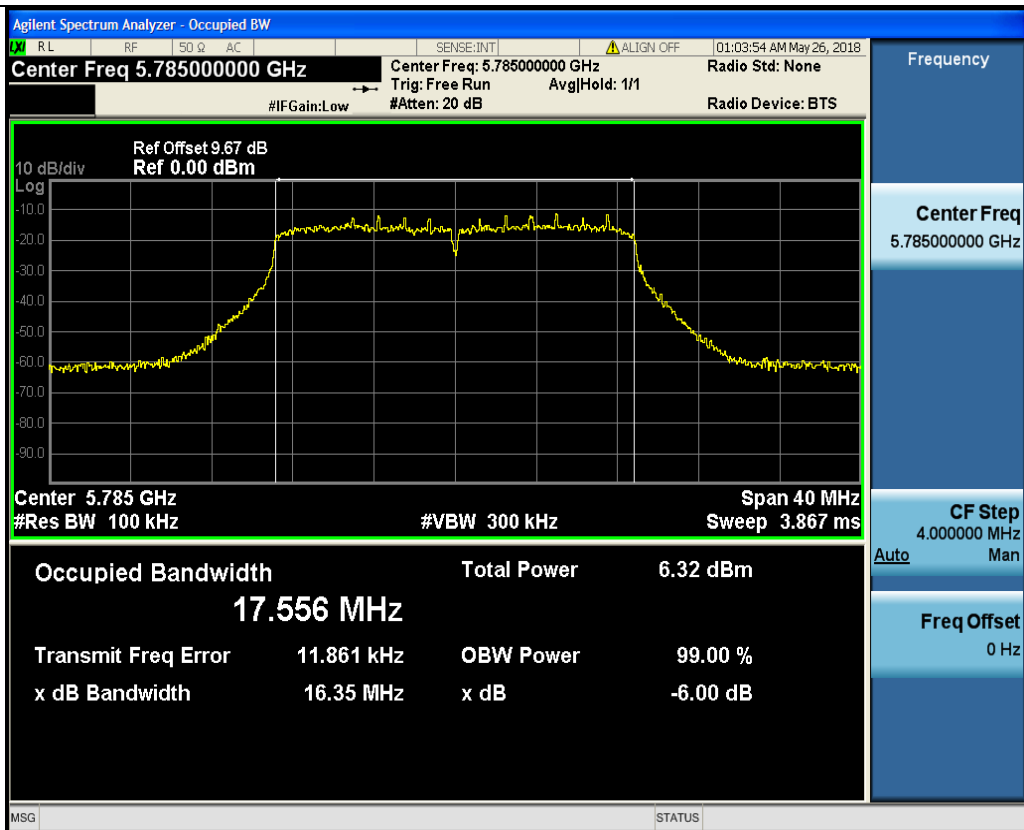


Mid

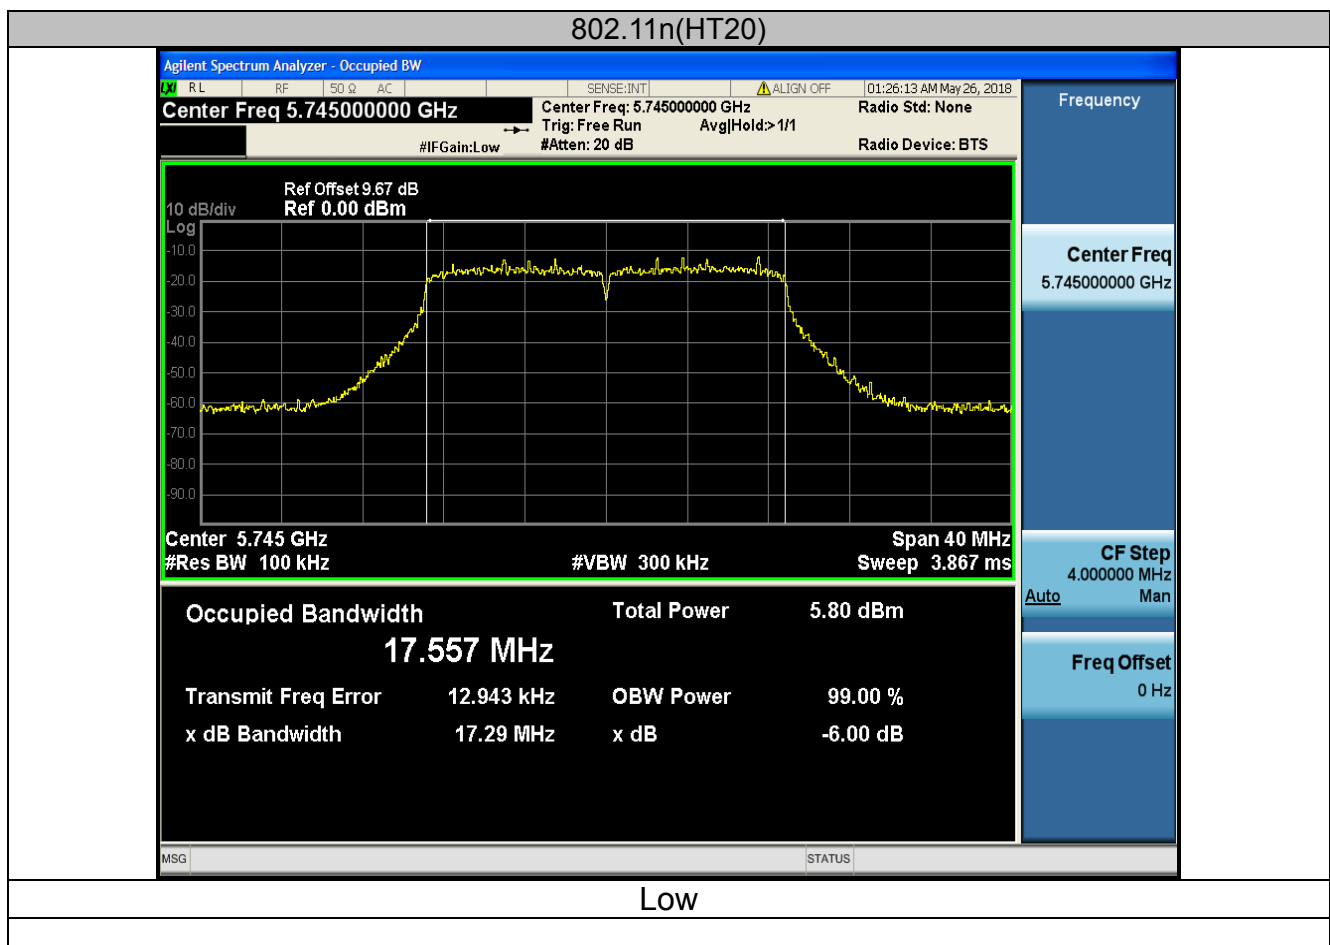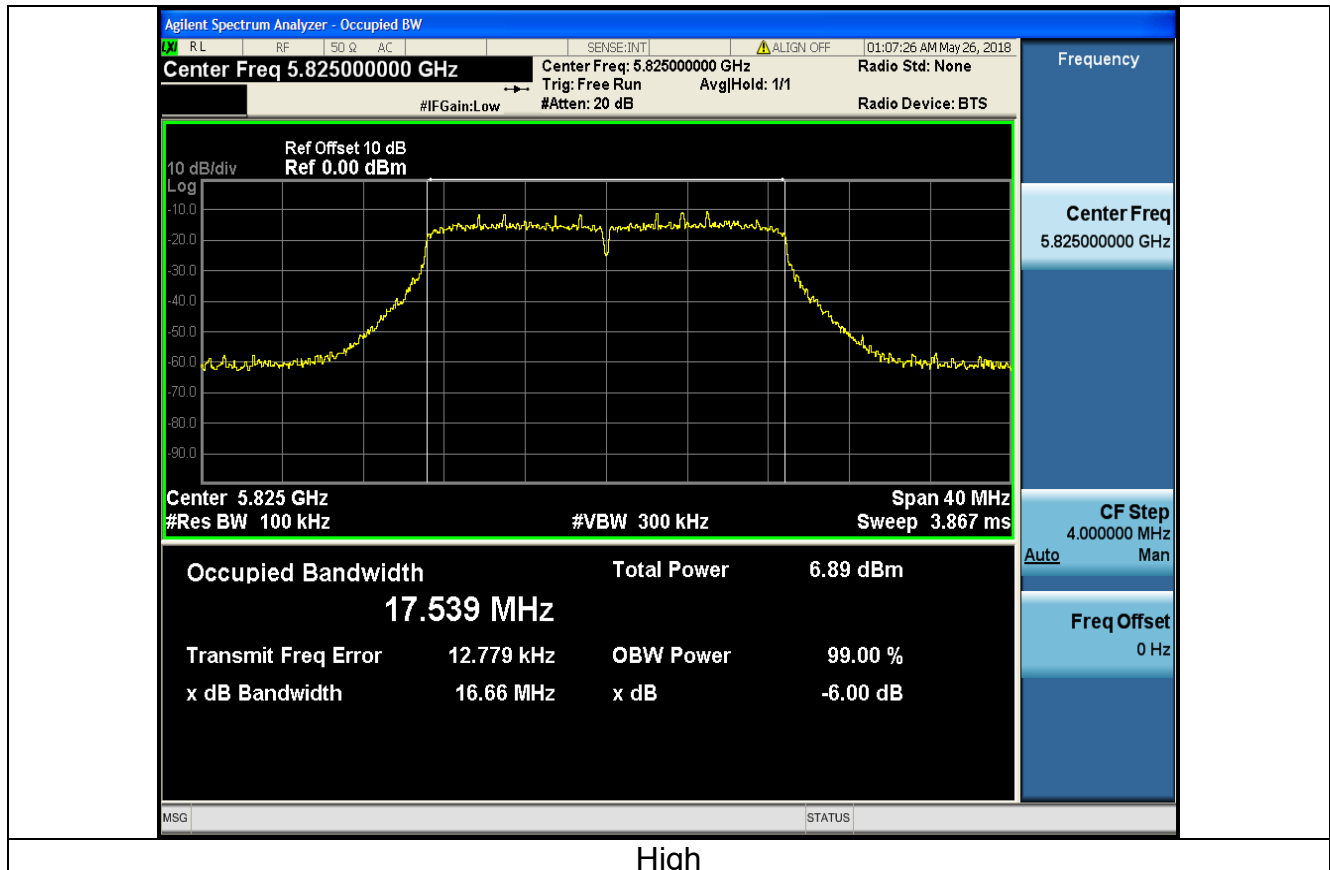

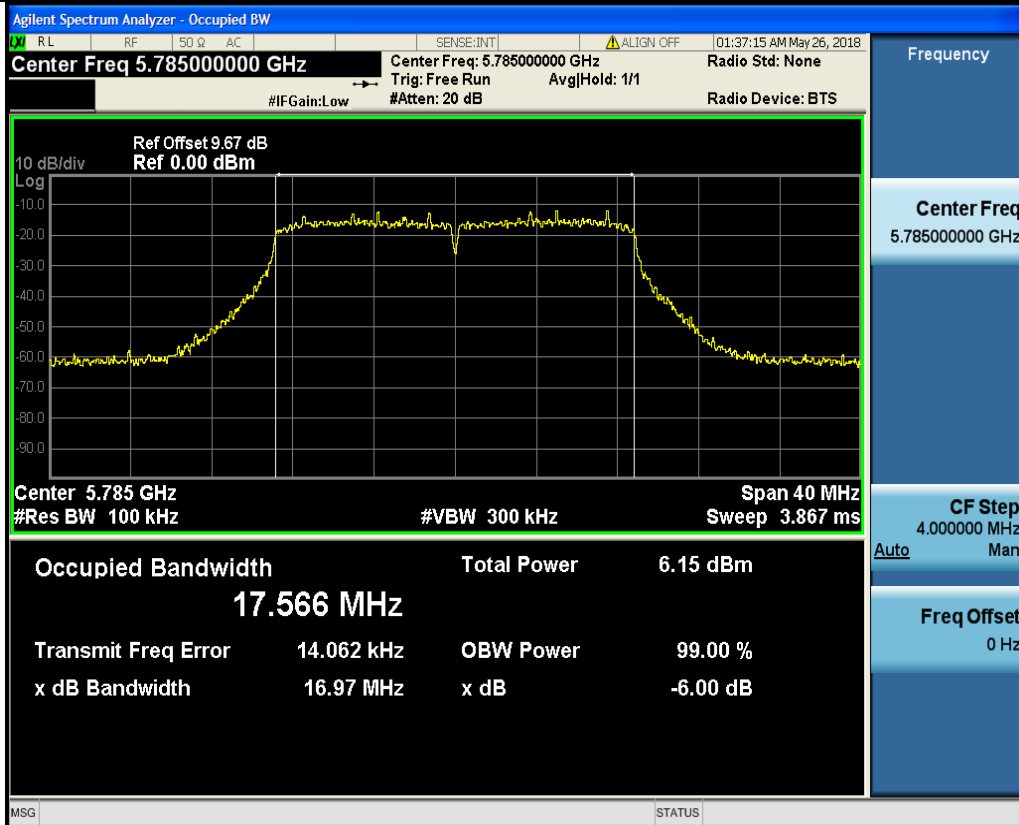


Mid

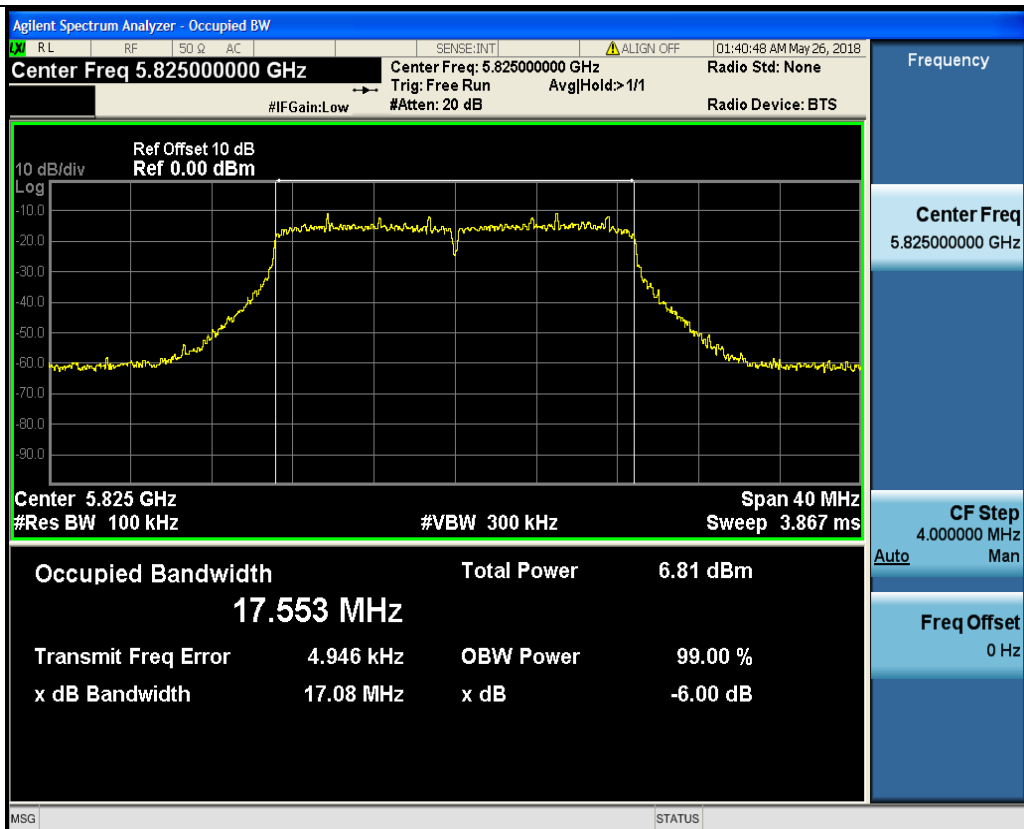


High



## 802.11n(HT40)

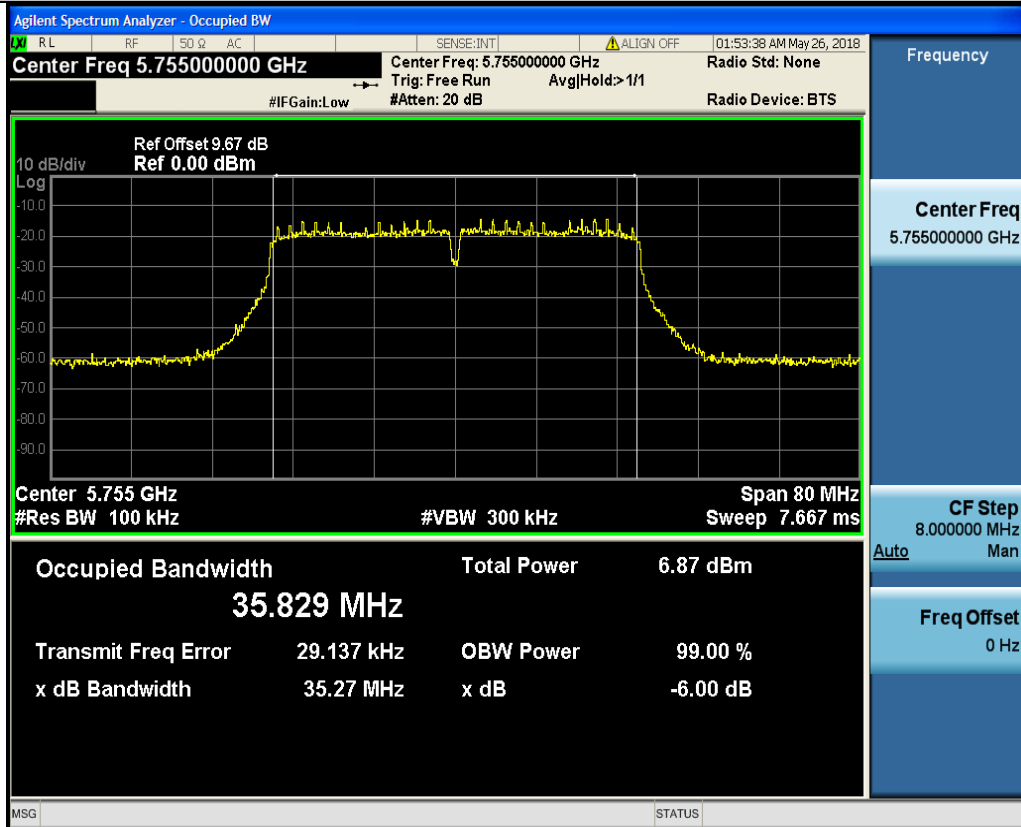

Low

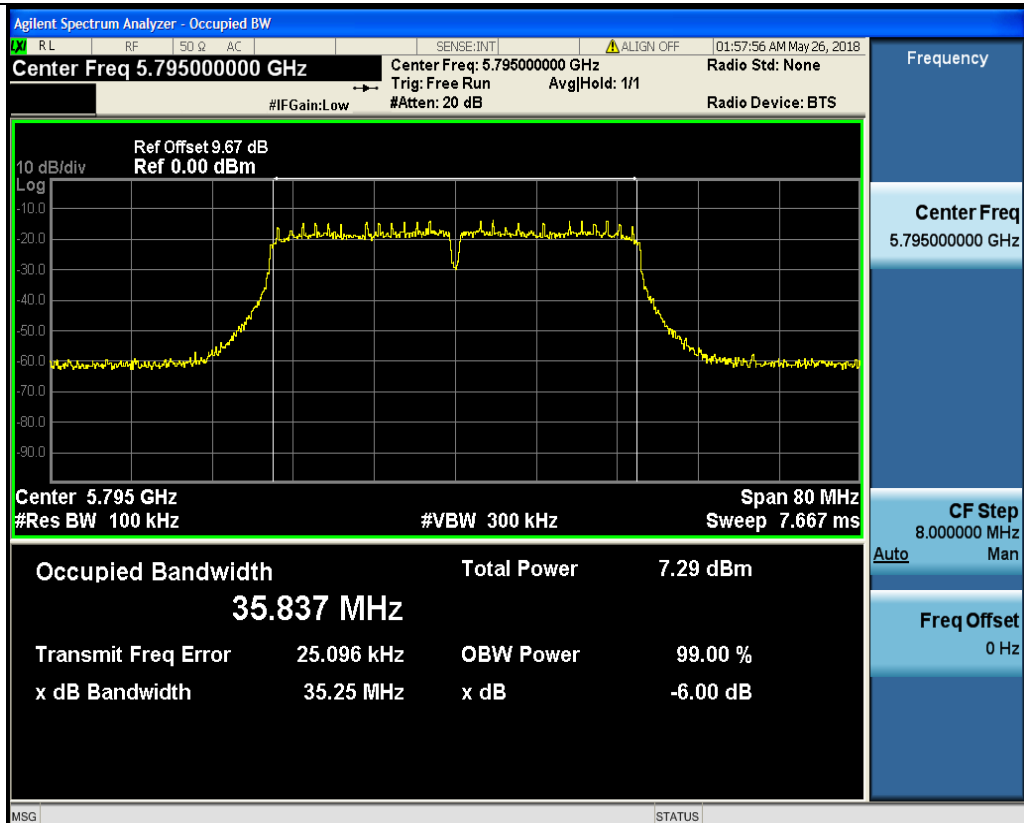


High








## 802.11ac(HT20)

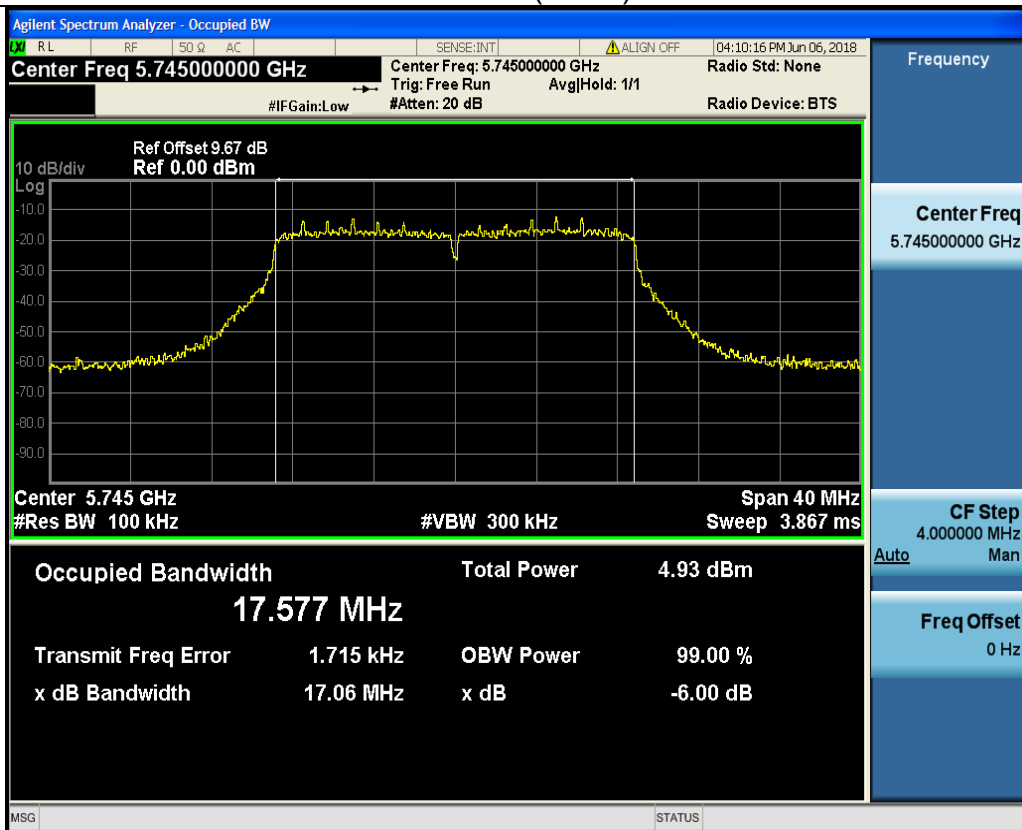


Low

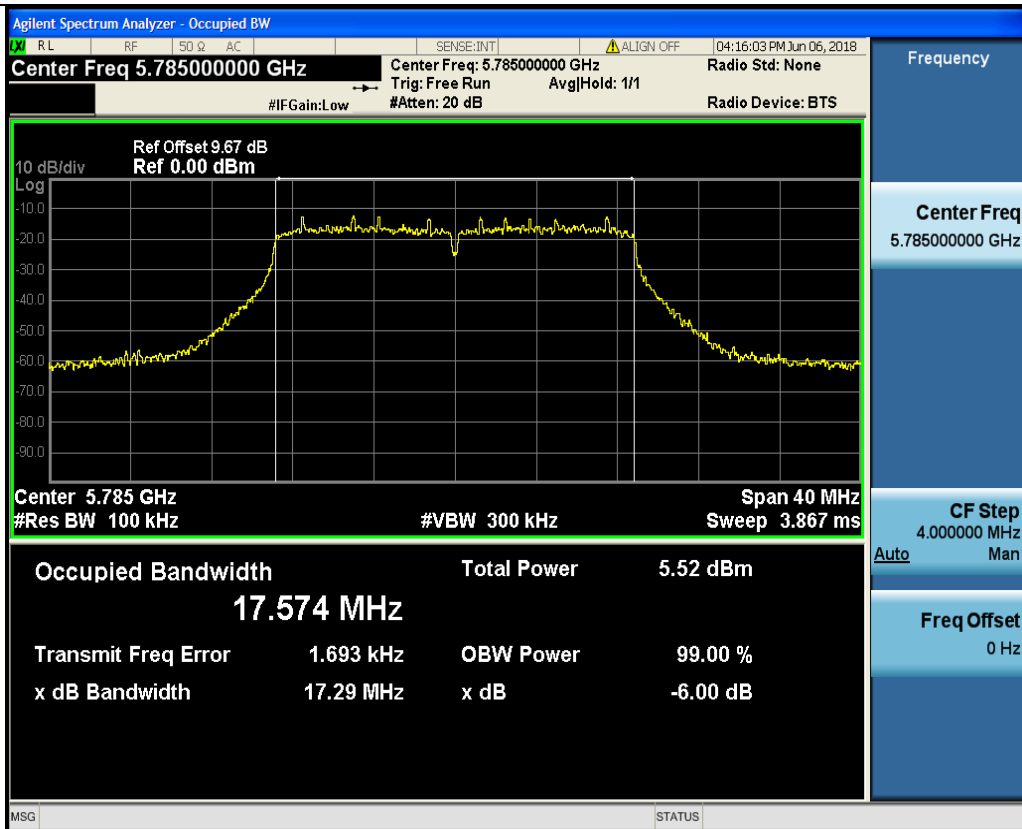


Mid

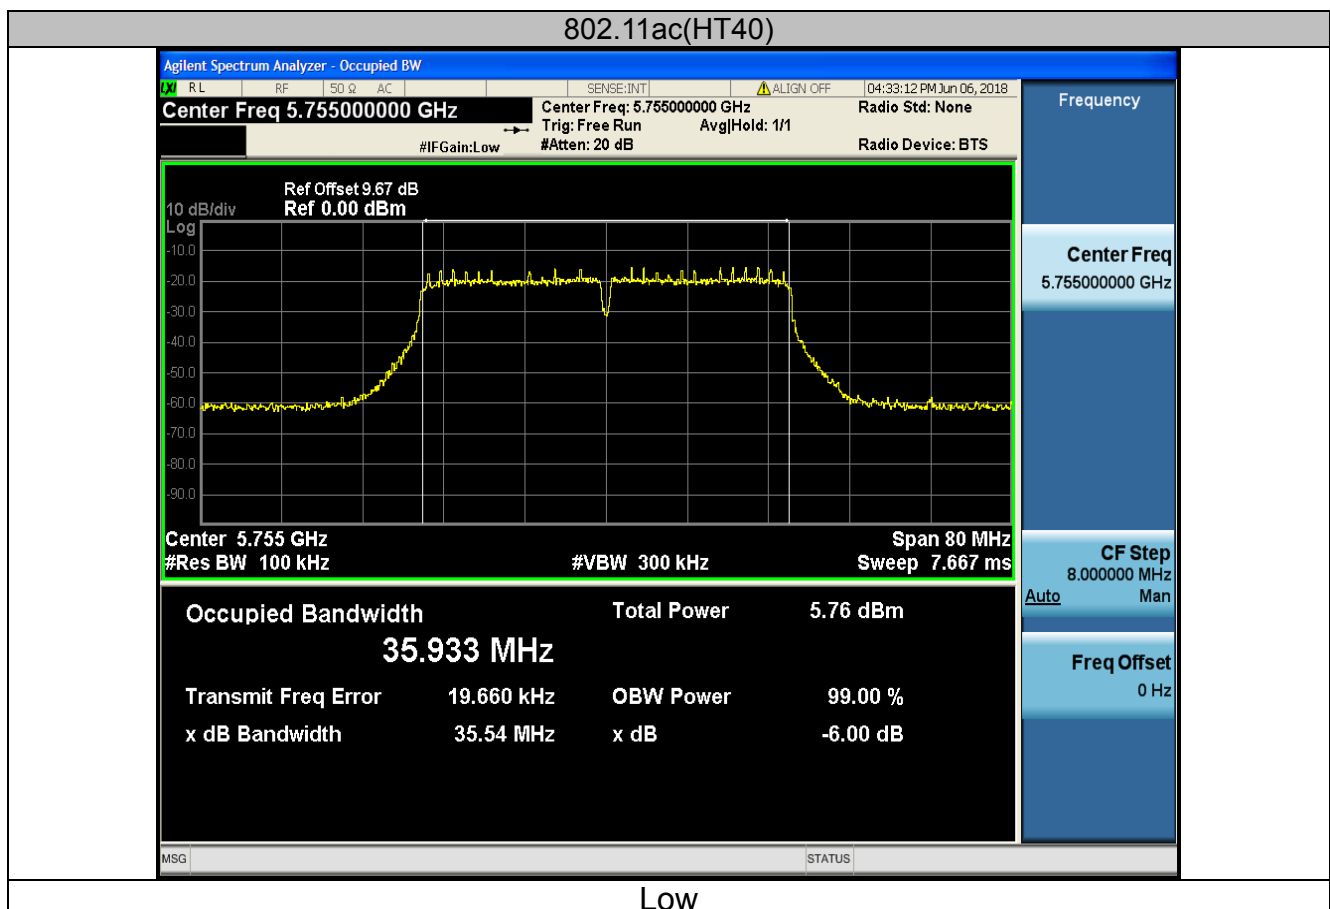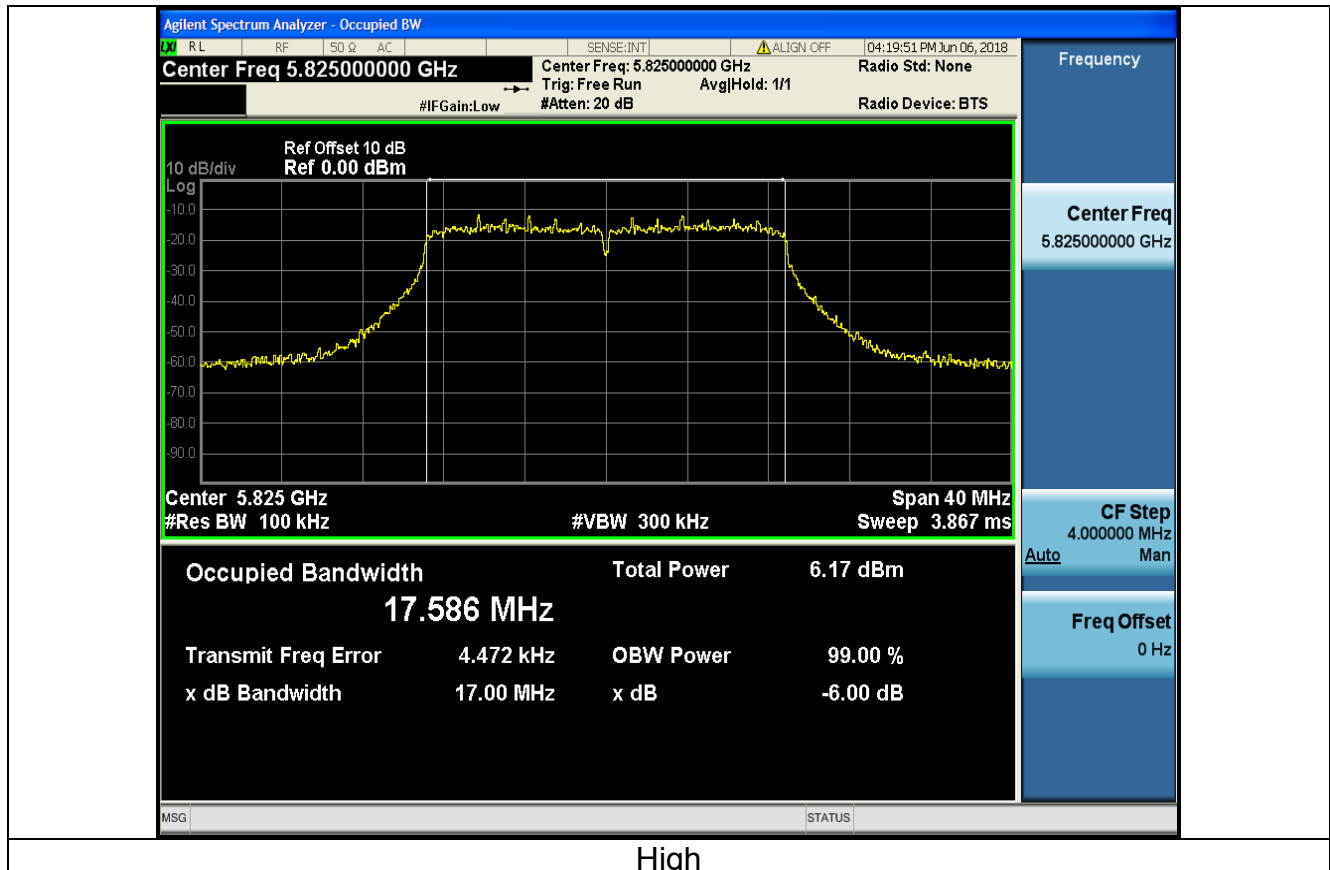

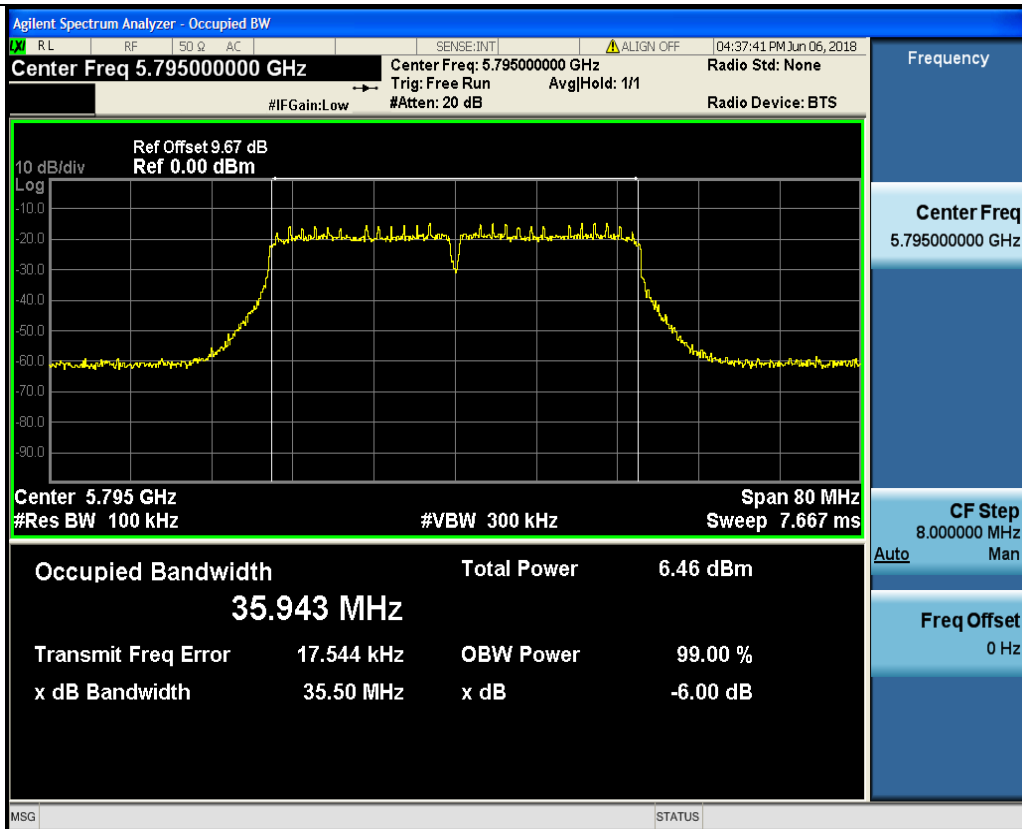

High


802.11ac(HT80)

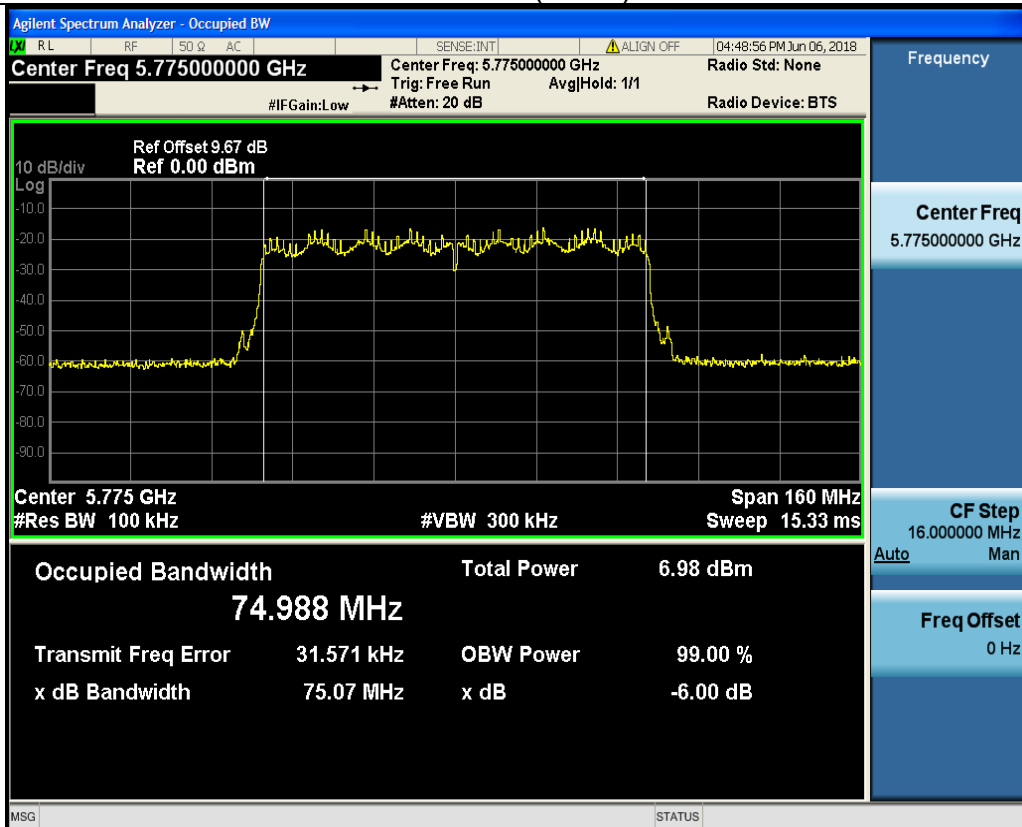



#### 4.4. 26dB Bandwidth and 99% Occupied Bandwidth

##### 4.4.1. Test Specification

<b>Test Requirement:</b>	47 CFR Part 15C Section 15.407 (a)& Part 2 J Section 2.1049
<b>Test Method:</b>	KDB789033 D02 General UNII Test Procedures New Rules v01r04 Section D
<b>Limit:</b>	No restriction limits
<b>Test Setup:</b>	 Spectrum Analyzer                      EUT
<b>Test Mode:</b>	Transmitting mode with modulation
<b>Test Procedure:</b>	<ol style="list-style-type: none"><li>1. KDB789033 D02 General UNII Test Procedures New Rules v01r04 Section D</li><li>2. Set to the maximum power setting and enable the EUT transmit continuously.</li><li>3. Make the measurement with the spectrum analyzer's resolution bandwidth <math>RBW = 1-5 \% EBW</math>, <math>VBW \geq 3RBW</math>, In order to make an accurate measurement.</li><li>4. Measure and record the results in the test report.</li></ol>
<b>Test Result:</b>	PASS

##### 4.4.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Sep. 27, 2018
RF cable	Times	1-40G	HKE-034	Sep. 27, 2018
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Sep. 27, 2018

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



#### 4.4.3. Test data


##### Band I

Mode	Test channel	Frequency (MHz)	26 dB Bandwidth (MHz)	Verdict
11a	CH36	5180	17.647	PASS
11a	CH40	5200	17.628	PASS
11a	CH48	5240	17.586	PASS
11n(HT20)	CH36	5180	17.661	PASS
11n(HT20)	CH40	5200	17.638	PASS
11n(HT20)	CH48	5240	17.626	PASS
11n(HT40)	CH38	5190	36.326	PASS
11n(HT40)	CH46	5230	36.220	PASS
11ac(HT20)	CH36	5180	17.658	PASS
11ac(HT20)	CH40	5200	17.715	PASS
11ac(HT20)	CH48	5240	17.680	PASS
11ac(HT40)	CH38	5190	36.374	PASS
11ac(HT40)	CH46	5230	36.306	PASS
11ac(HT80)	CH42	5210	76.079	PASS


Test plots as follows:




## Band I (5150 – 5250 MHz)

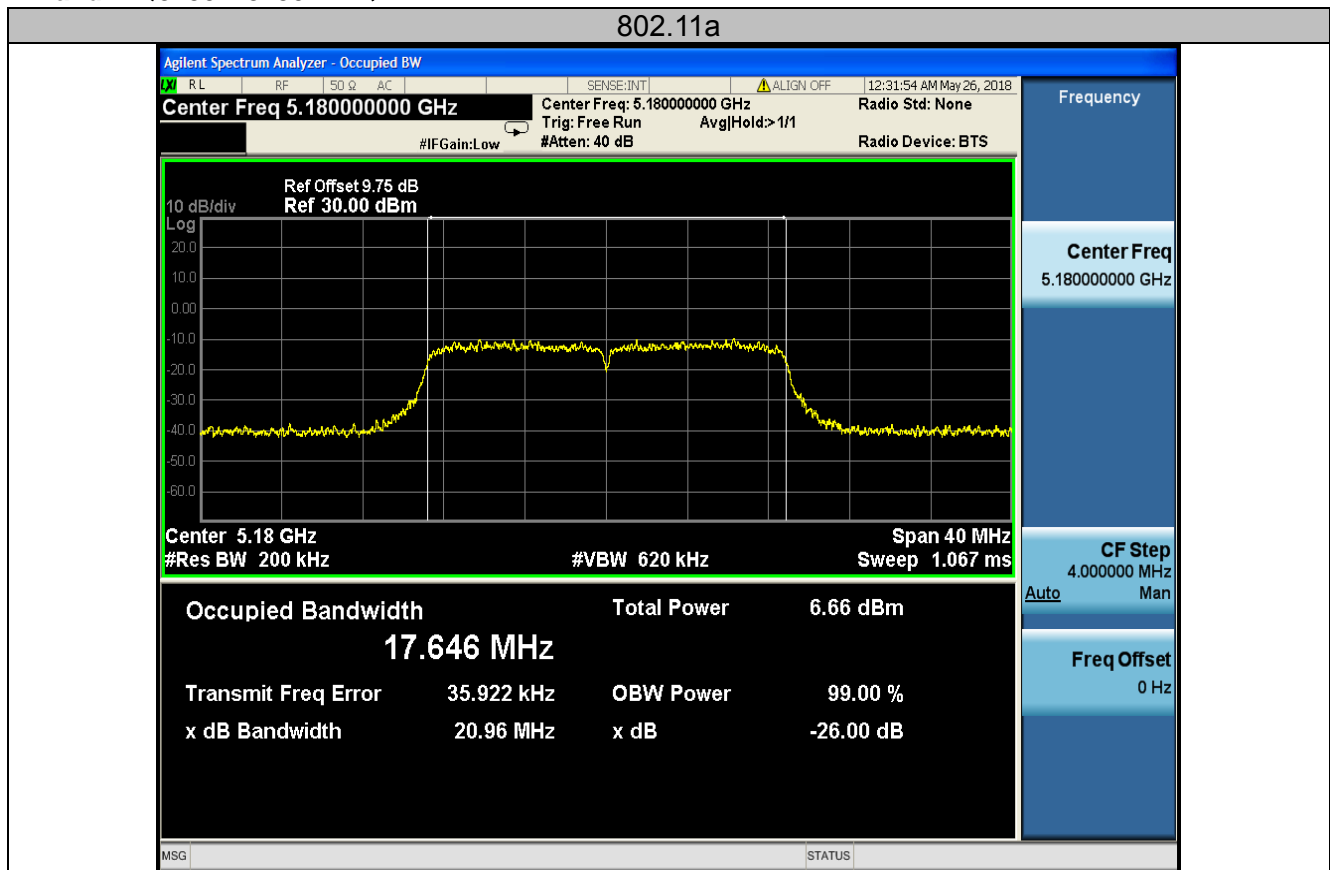

Low

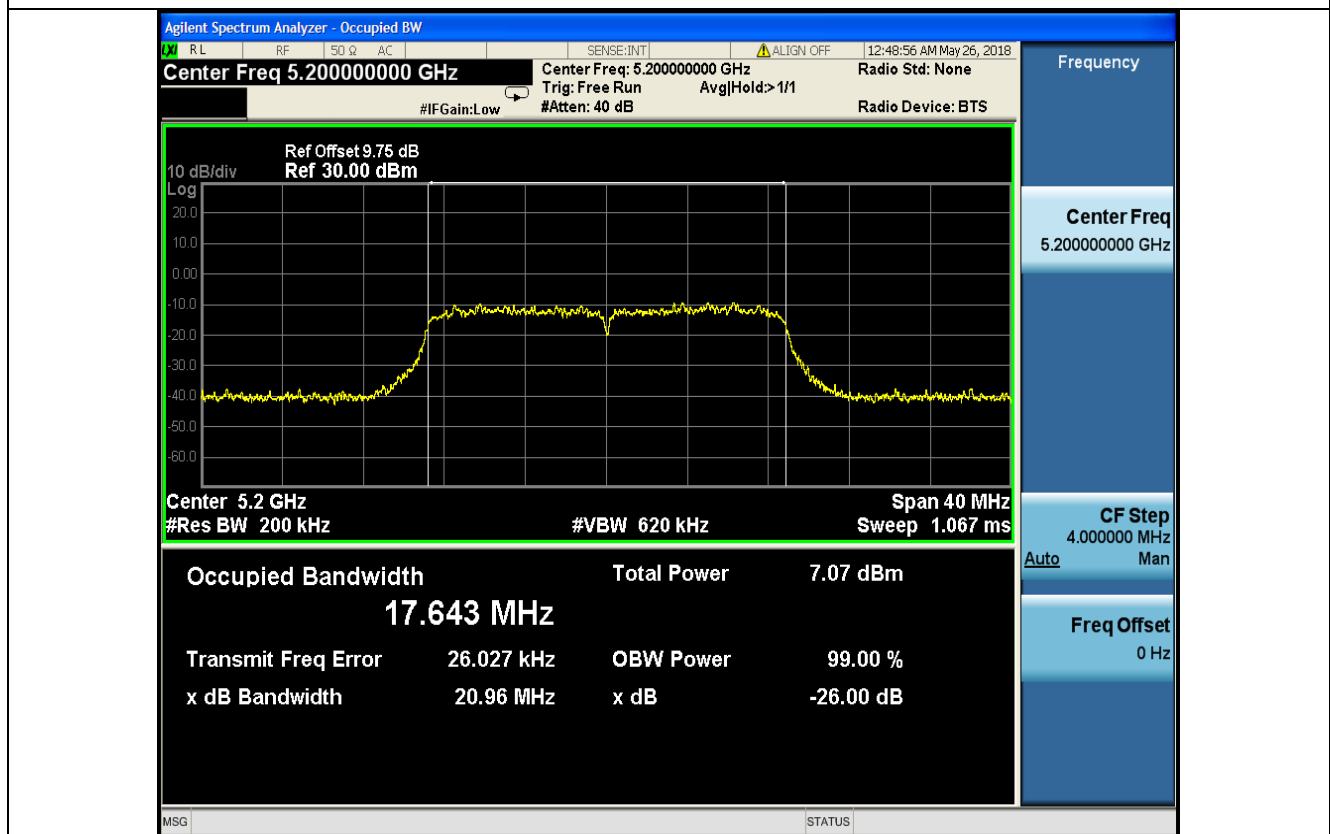


Mid

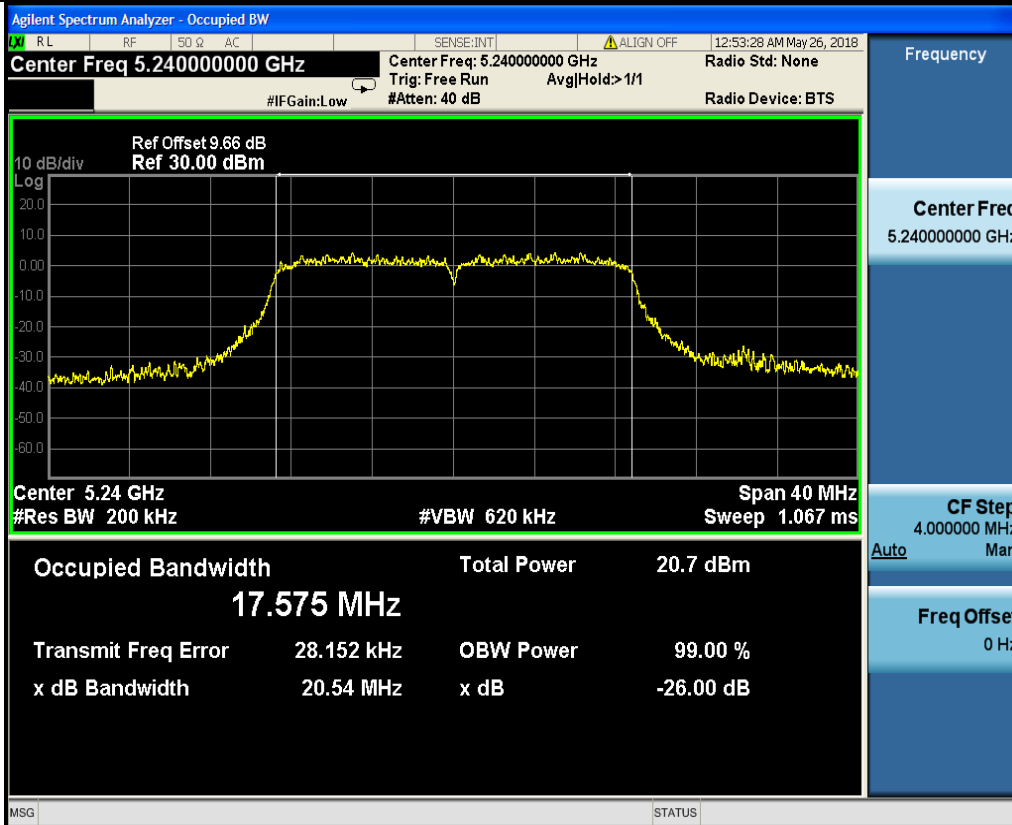


High


802.11n(HT20)

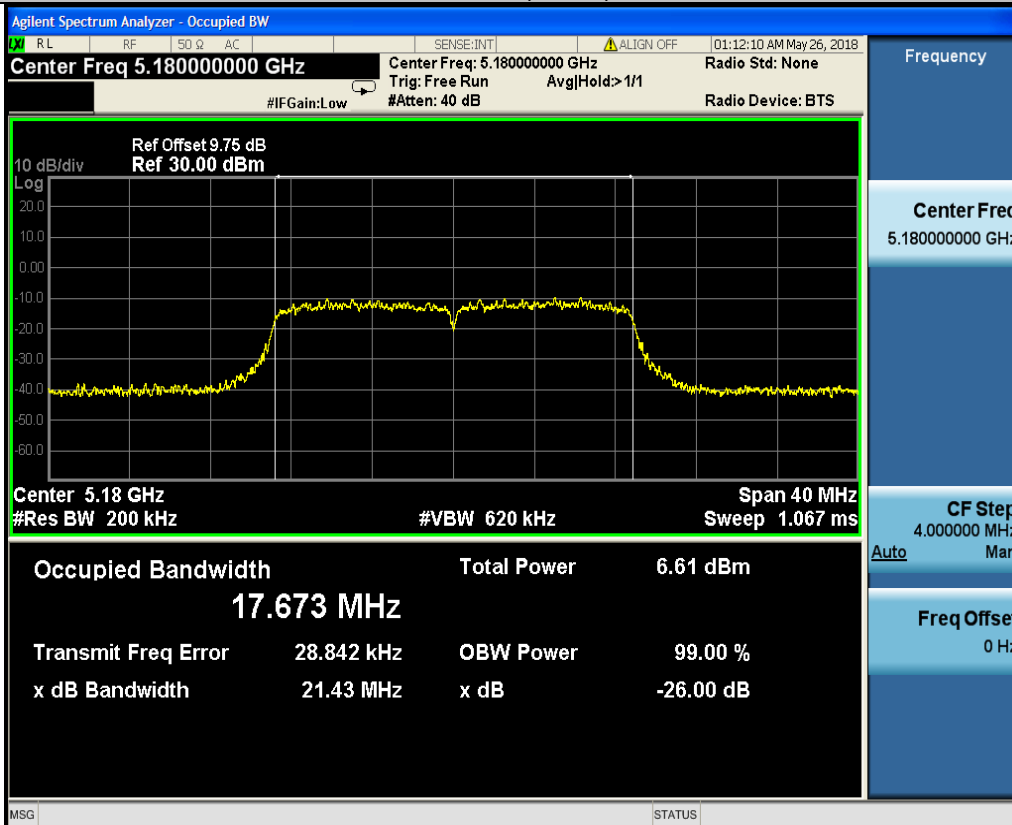

Low

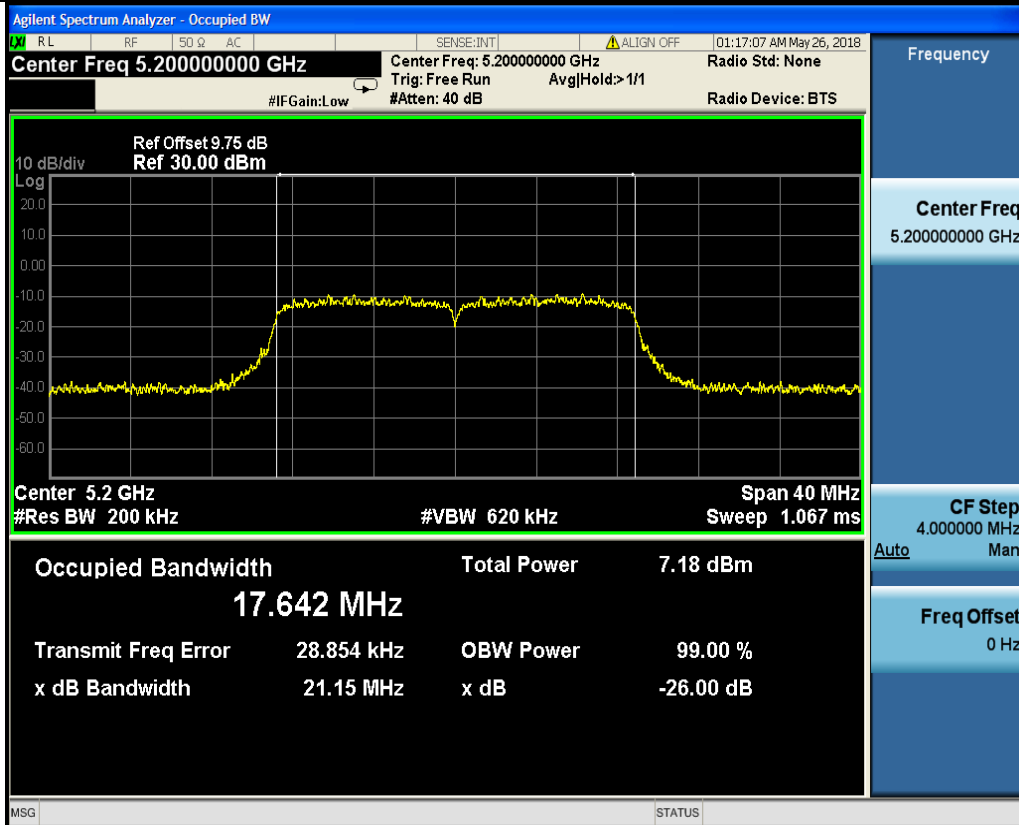

Mid

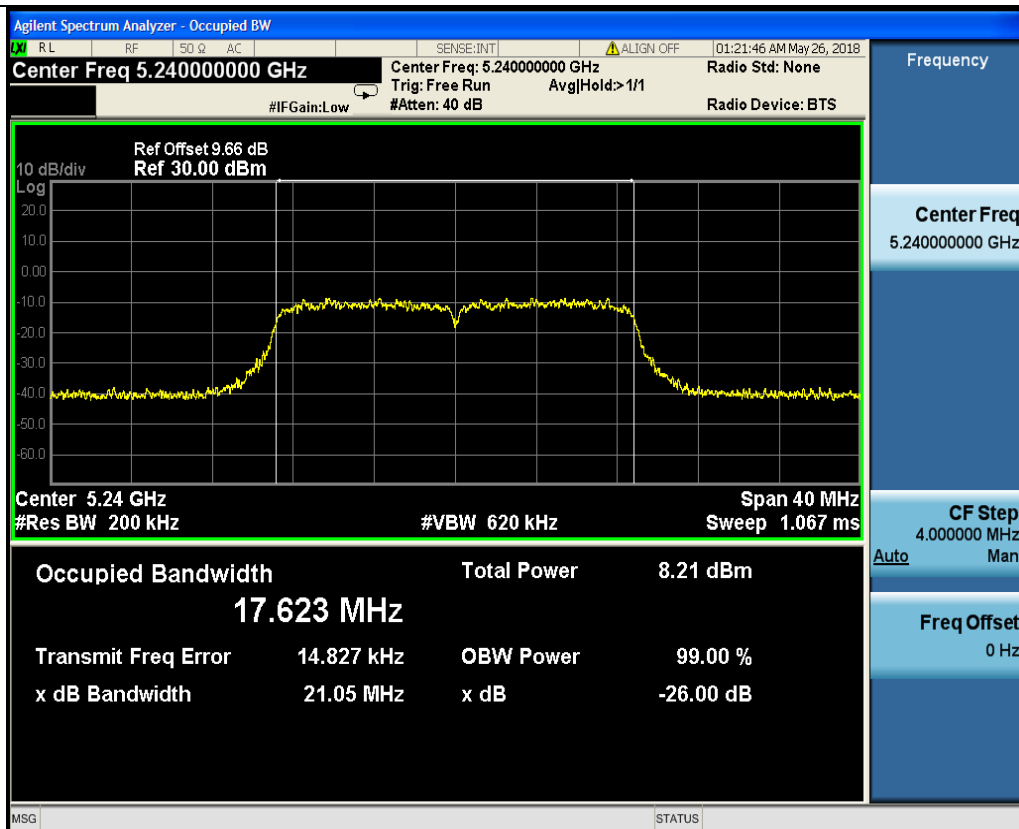


High






## 802.11n(HT40)

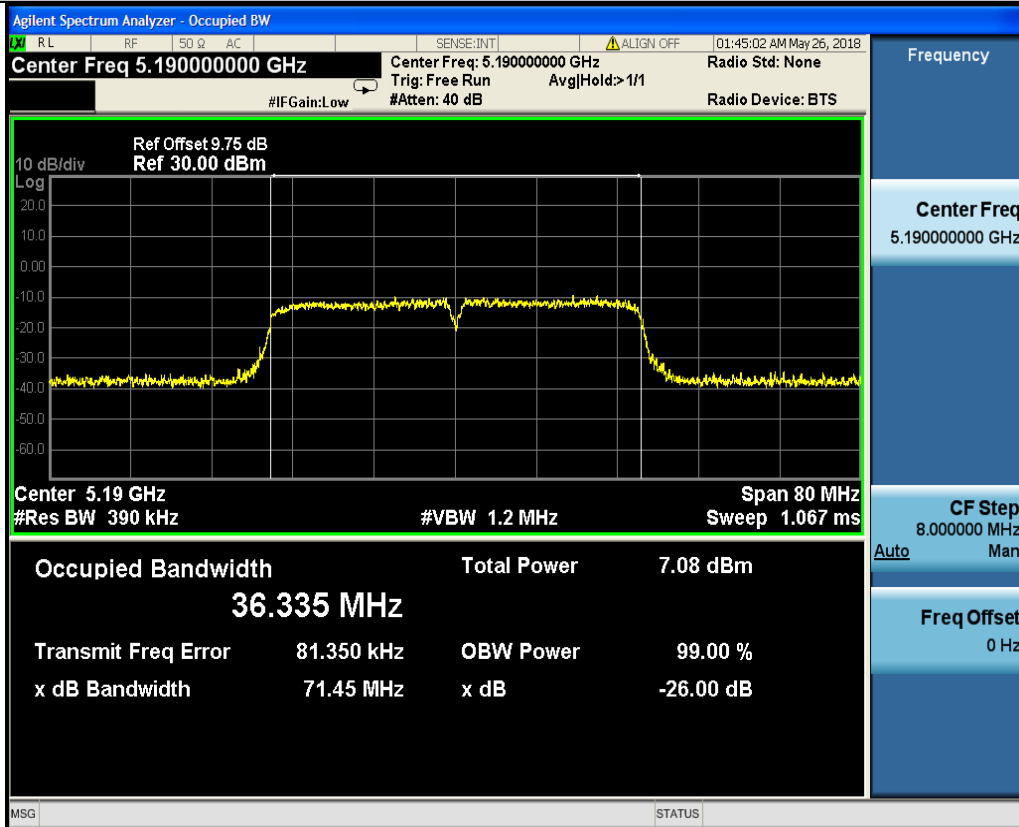


Low

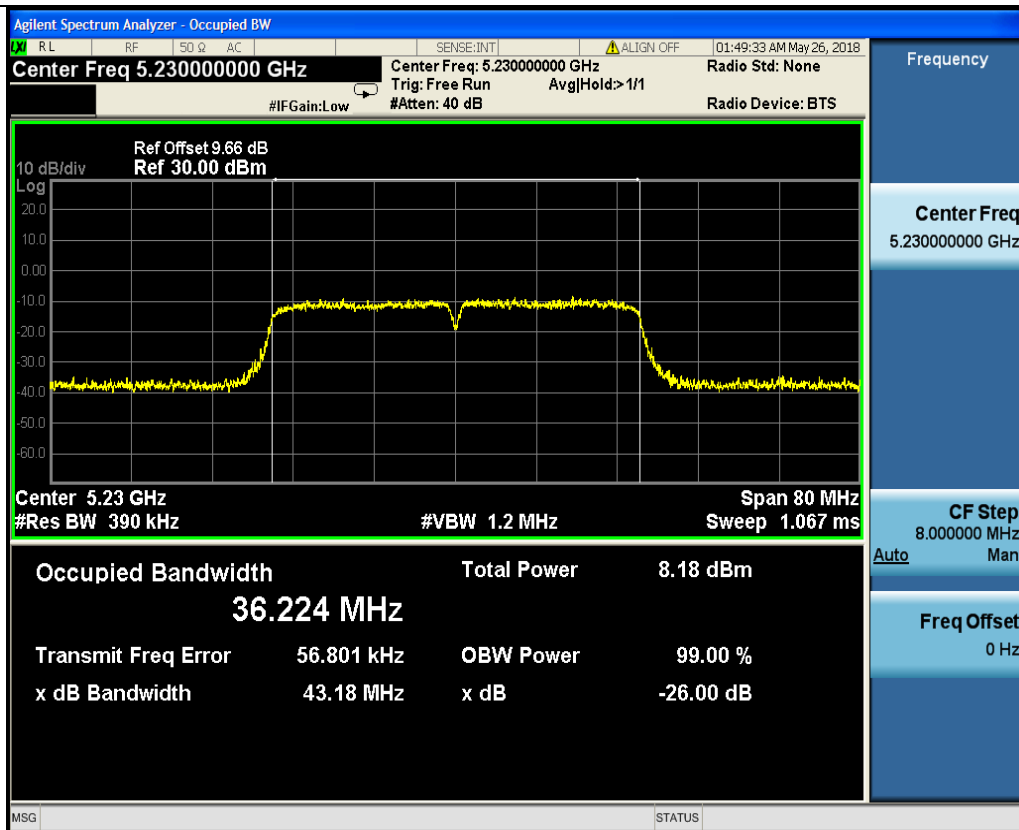


High





## 802.11ac(HT20)


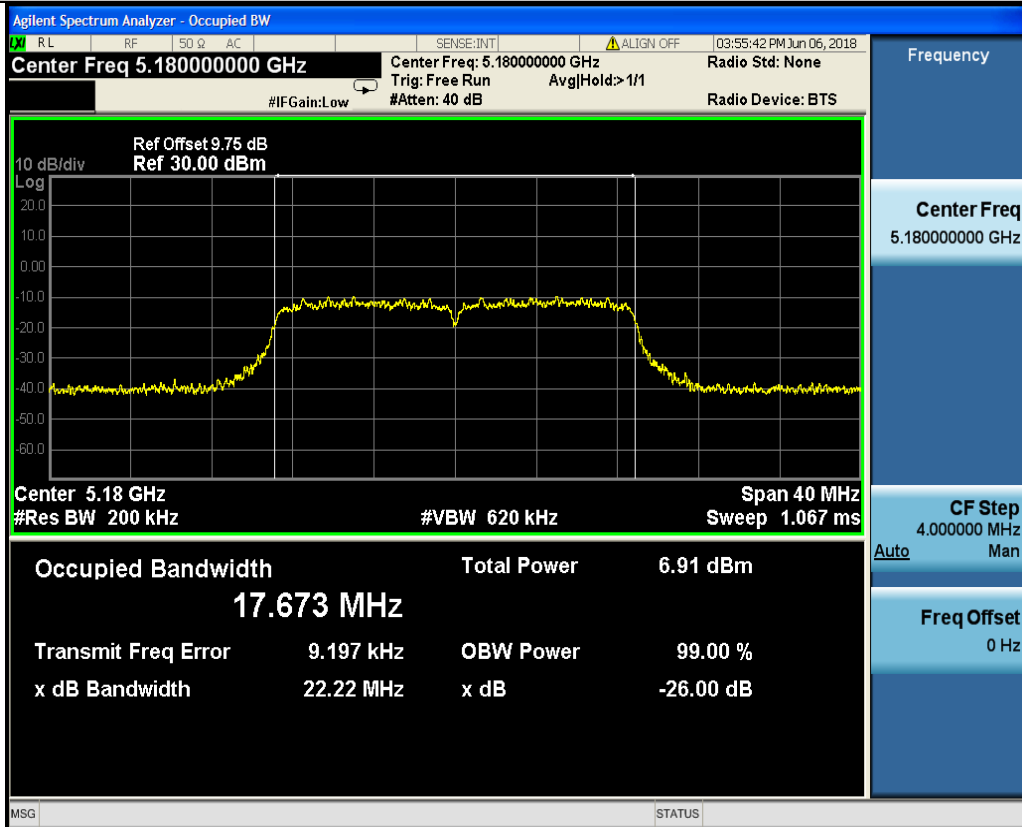


Low

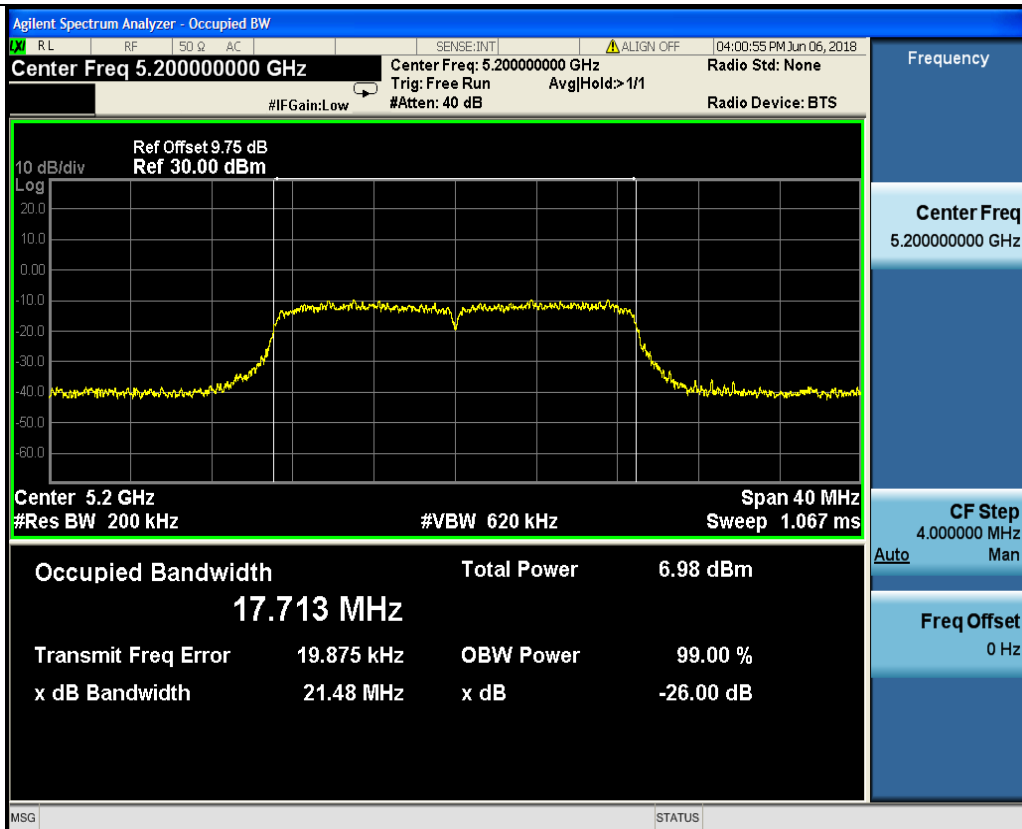

Mid

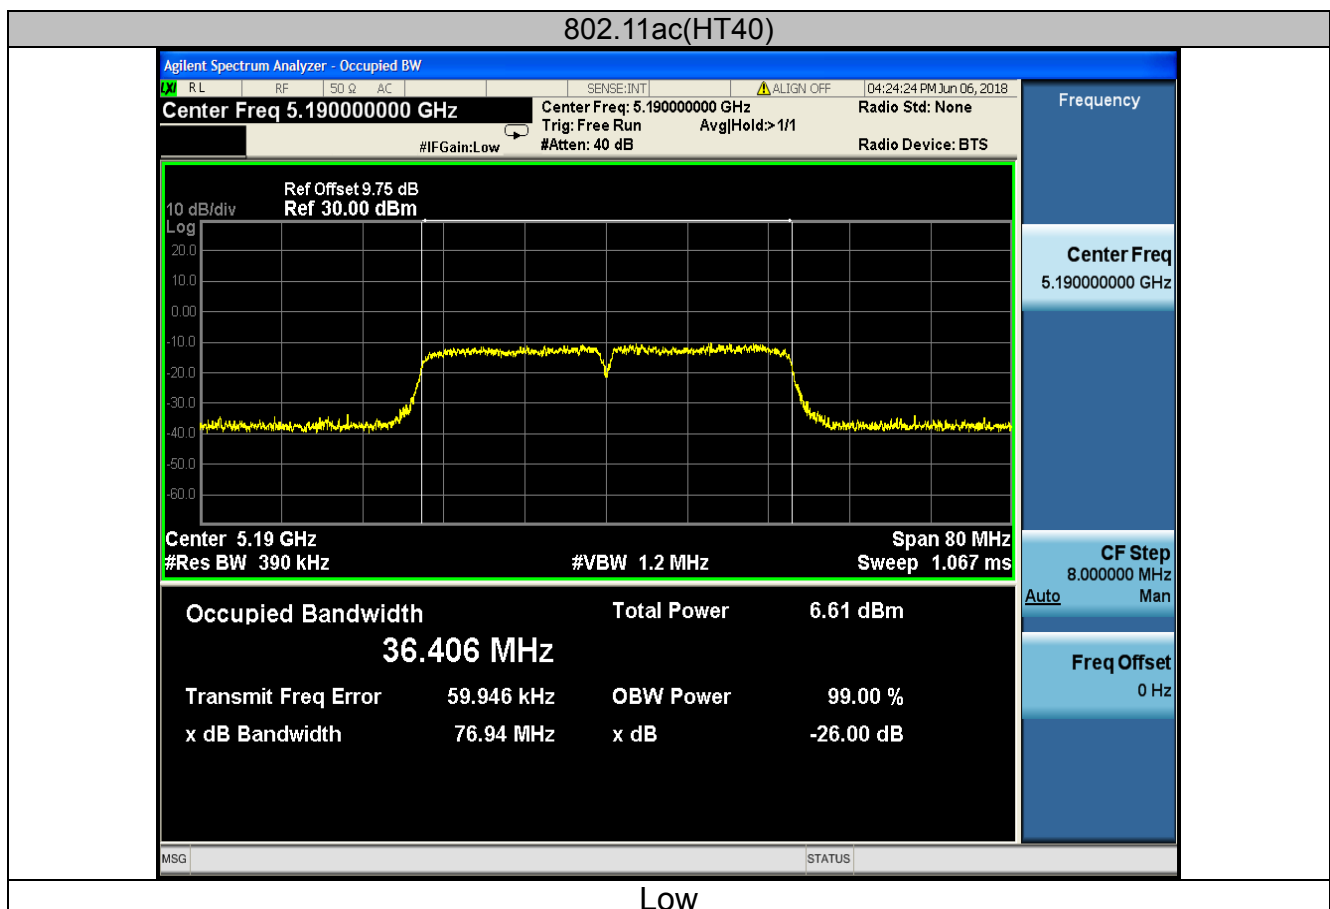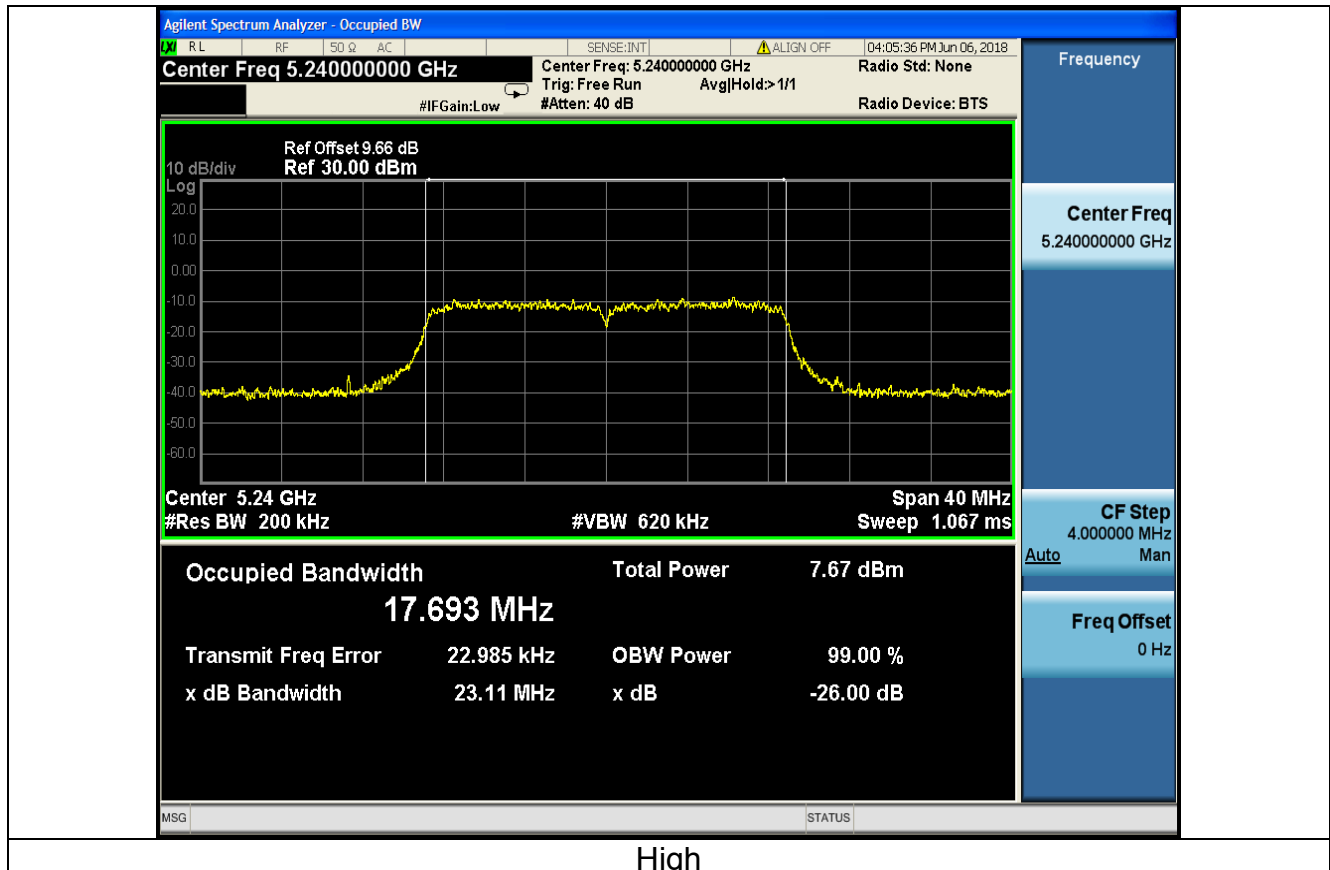


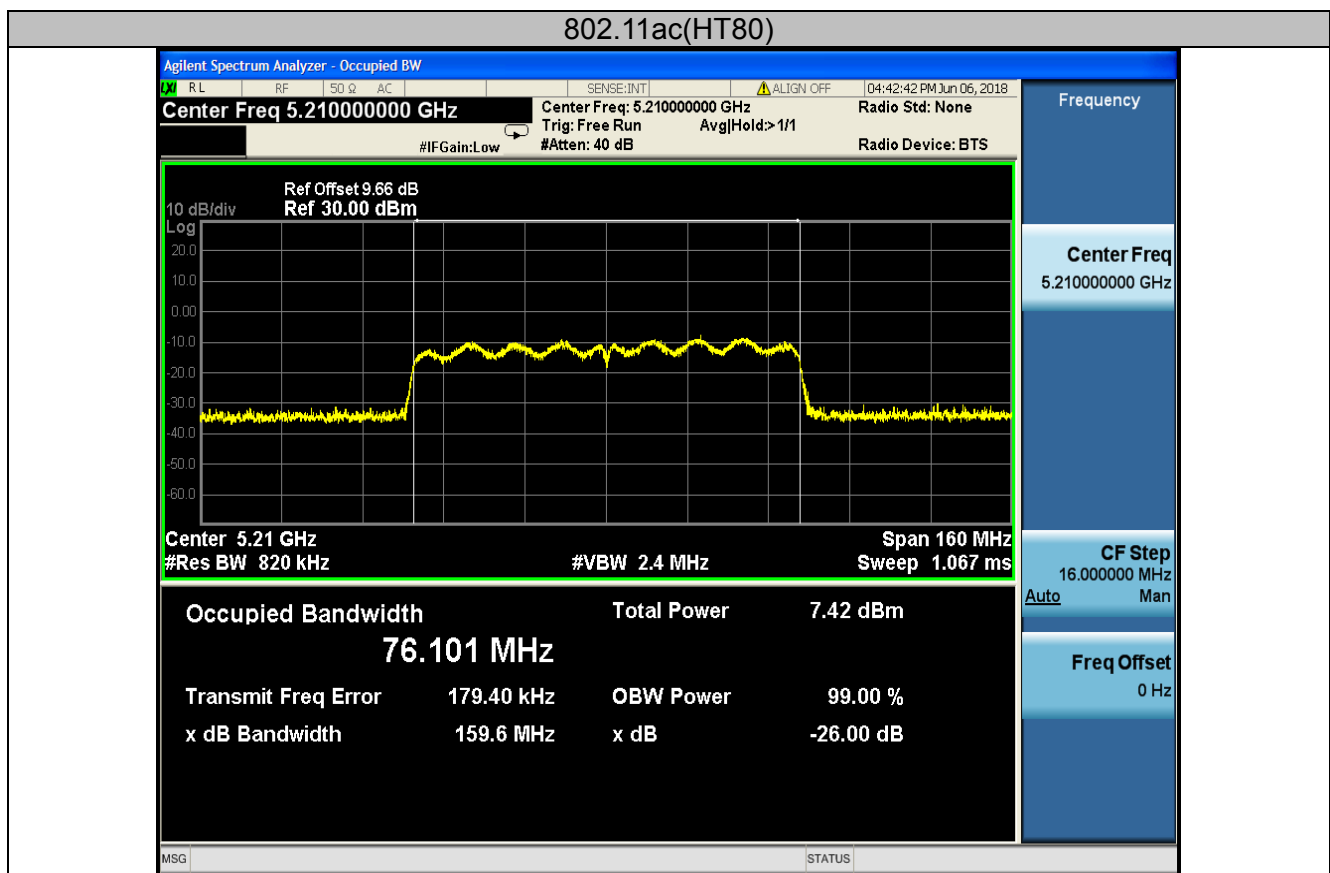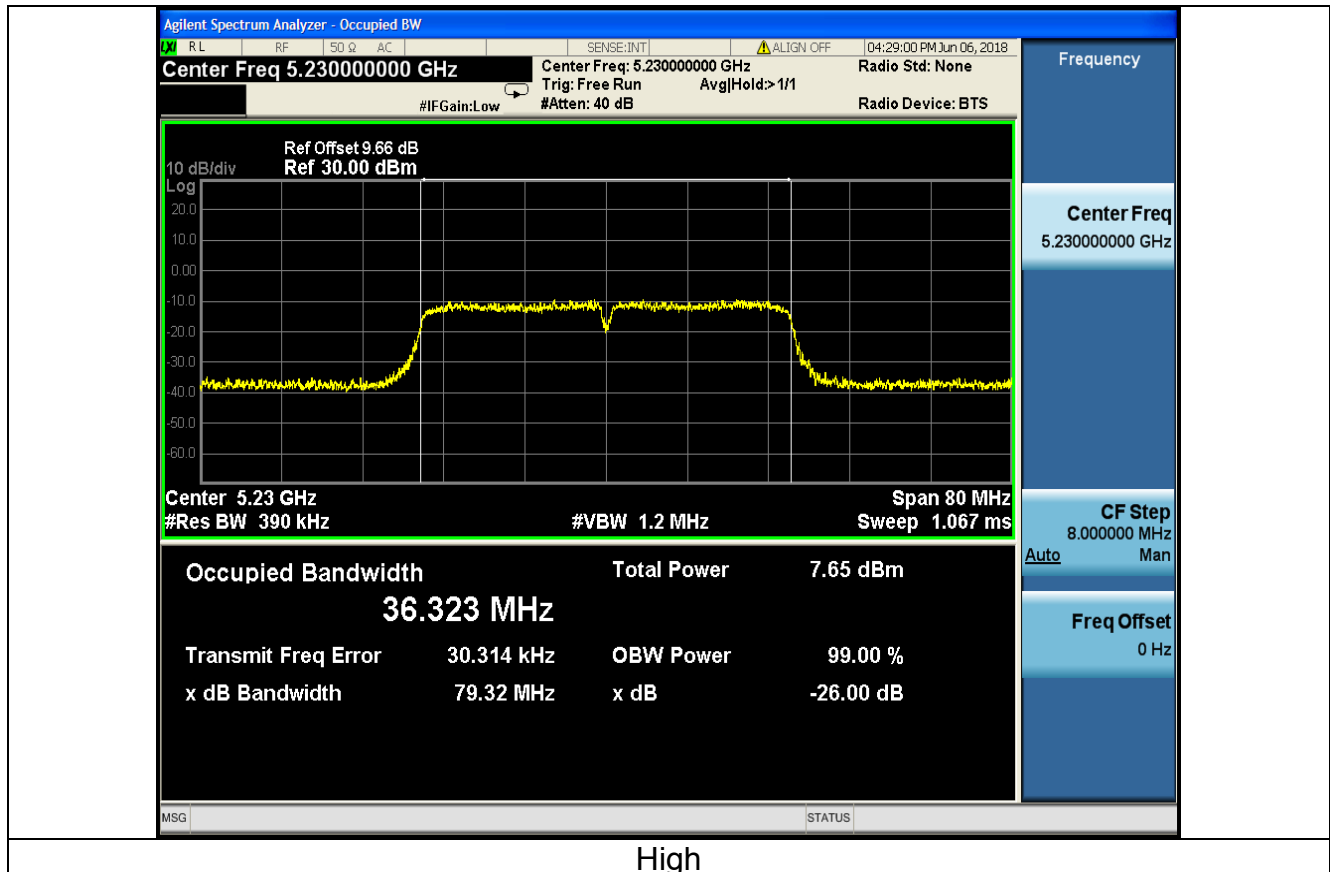



## 4.5. Power Spectral Density

### 4.5.1. Test Specification
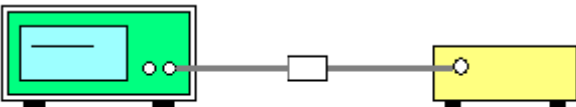
<b>Test Requirement:</b>	FCC Part15 E Section 15.407 (a)
<b>Test Method:</b>	KDB789033 D02 General UNII Test Procedures New Rules v01r04 Section F
<b>Limit:</b>	$\leq 11.00\text{dBm/MHz}$ for Band I 5150MHz-5250MHz $\leq 30.00\text{dBm/500KHz}$ for Band IV 5725MHz-5850MHz The e.i.r.p spectral density for Band I 5150MHz – 5250 MHz should not exceed 10dBm/MHz
<b>Test Setup:</b>	 <p style="text-align: center;">Spectrum Analyzer                      EUT</p>
<b>Test Mode:</b>	Transmitting mode with modulation
<b>Test Procedure:</b>	1. Set the spectrum analyzer or EMI receiver span to view the entire emission bandwidth. 1. Set RBW = 510 kHz/1 MHz, VBW $\geq 3 \times$ RBW, Sweep time = Auto, Detector = RMS. 2. Allow the sweeps to continue until the trace stabilizes. 3. Use the peak marker function to determine the maximum amplitude level. 4. The E.I.R.P spectral density used radiated test method. At a test site that has been validated using the procedures of ANSI C63.4 or the latest CISPR 16-1-4 for measurements above 1 GHz, so as to simulate a near free-space environment.
<b>Test Result:</b>	PASS

### 4.5.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Sep. 27, 2018
RF cable	Times	1-40G	HKE-034	Sep. 27, 2018
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Sep. 27, 2018

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



#### 4.5.3. Test data

Configuration Band I (5150 - 5250 MHz )						
Mode	Test channel	Level [dBm/MHz]	10log(1/x) Factor [dB]	Power Spectral Density	Limit (dBm/MHz)	Result
11a	CH36	-4.59	0	-4.59	11	PASS
11a	CH40	-4.34	0	-4.34	11	PASS
11a	CH48	8.68	0	8.68	11	PASS
11n(HT20)	CH36	-5.16	0	-5.16	11	PASS
11n(HT20)	CH40	-4.57	0	-4.57	11	PASS
11n(HT20)	CH48	-3.79	0	-3.79	11	PASS
11n(HT40)	CH38	-7.52	0	-7.52	11	PASS
11n(HT40)	CH46	-6.46	0	-6.46	11	PASS
11ac(HT20)	CH36	-4.71	0	-4.71	11	PASS
11ac(HT20)	CH40	-4.48	0	-4.48	11	PASS
11ac(HT20)	CH48	-4.08	0	-4.08	11	PASS
11ac(HT40)	CH38	-8.03	0	-8.03	11	PASS
11ac(HT40)	CH46	-7.47	0	-7.47	11	PASS
11ac(HT80)	CH42	-9.73	0	-9.73	11	PASS




Configuration Band IV (5725 - 5850 MHz )						
Mode	Test channel	Level [dBm/500kHz]	10log(1/x) Factor[dB]	Power Spectral Density	Limit (dBm/500kHz)	Result
11a	CH149	-8.86	0	-8.86	30	PASS
11a	CH157	-8.42	0	-8.42	30	PASS
11a	CH161	-7.43	0	-7.43	30	PASS
11n(HT20)	CH149	-8.77	0	-8.77	30	PASS
11n(HT20)	CH157	-8.04	0	-8.04	30	PASS
11n(HT20)	CH161	-7.83	0	-7.83	30	PASS
11n(HT40)	CH151	-10.68	0	-10.68	30	PASS
11n(HT40)	CH159	-10.20	0	-10.20	30	PASS
11ac(HT20)	CH149	-9.74	0	-9.74	30	PASS
11ac(HT20)	CH157	-9.24	0	-9.24	30	PASS
11ac(HT20)	CH161	-7.24	0	-7.24	30	PASS
11ac(HT40)	CH151	-12.06	0	-12.06	30	PASS
11ac(HT40)	CH159	-11.40	0	-11.40	30	PASS
11ac(HT80)	CH155	-13.08	0	-13.08	30	PASS


Test plots as follows:



## Band I (5150 – 5250 MHz)

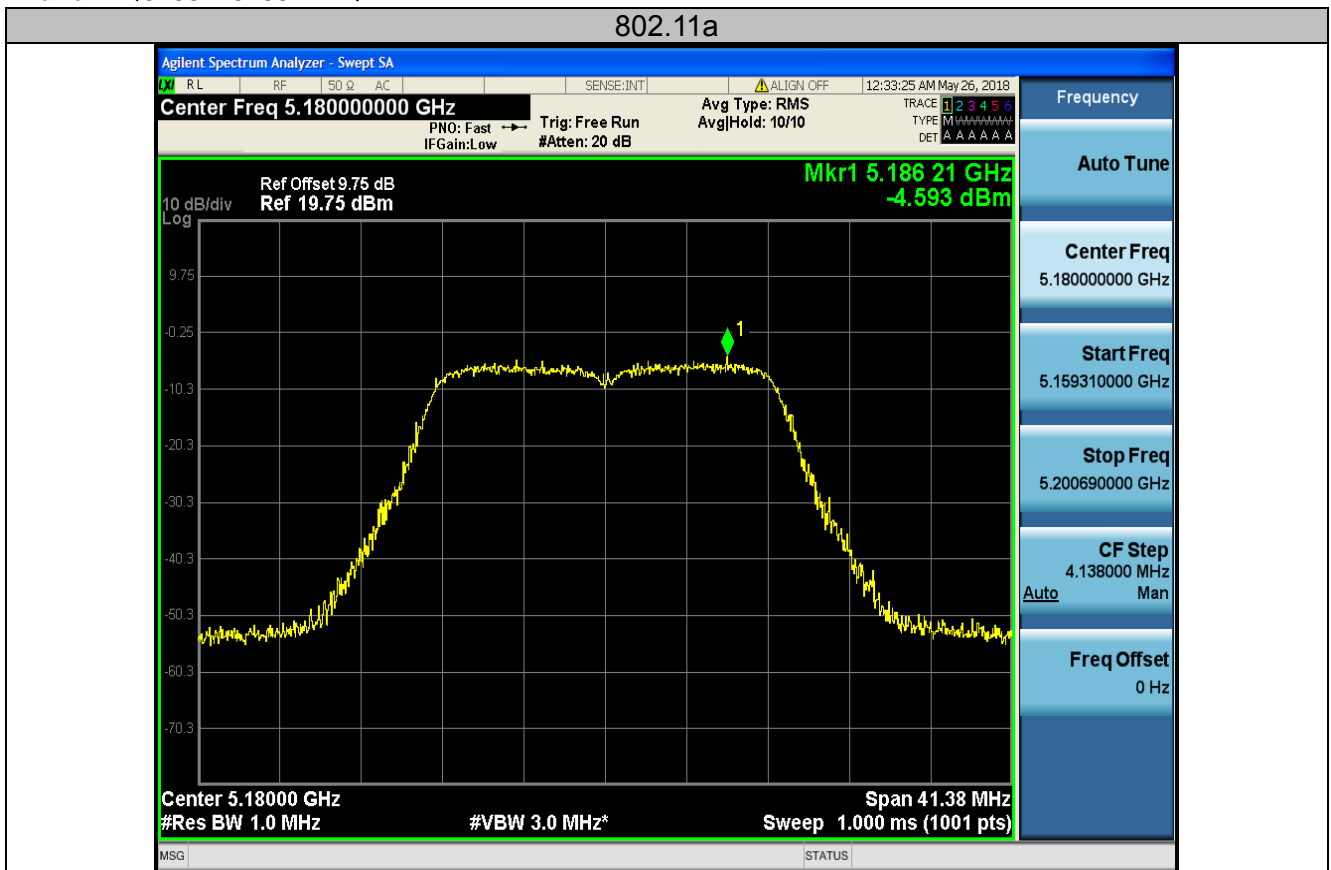


Low

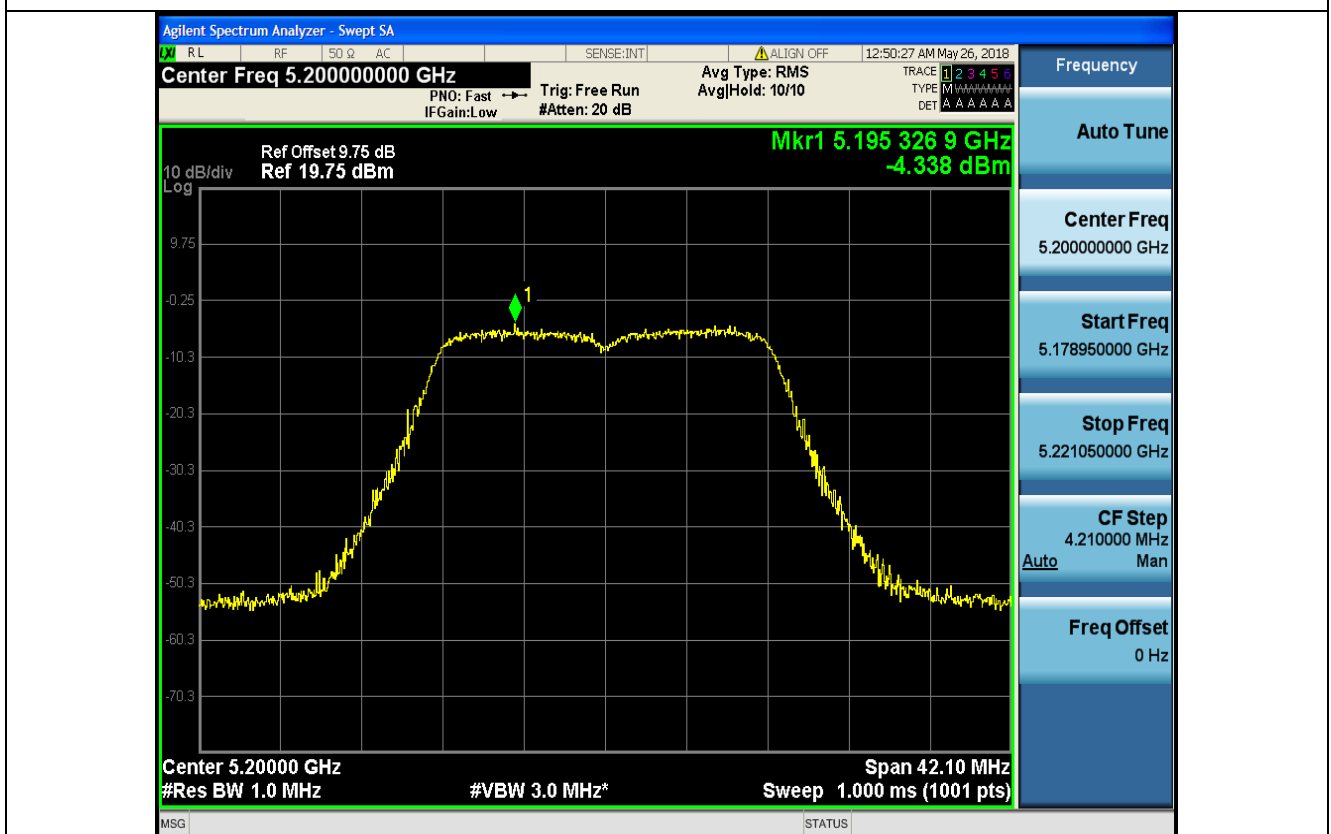


Mid




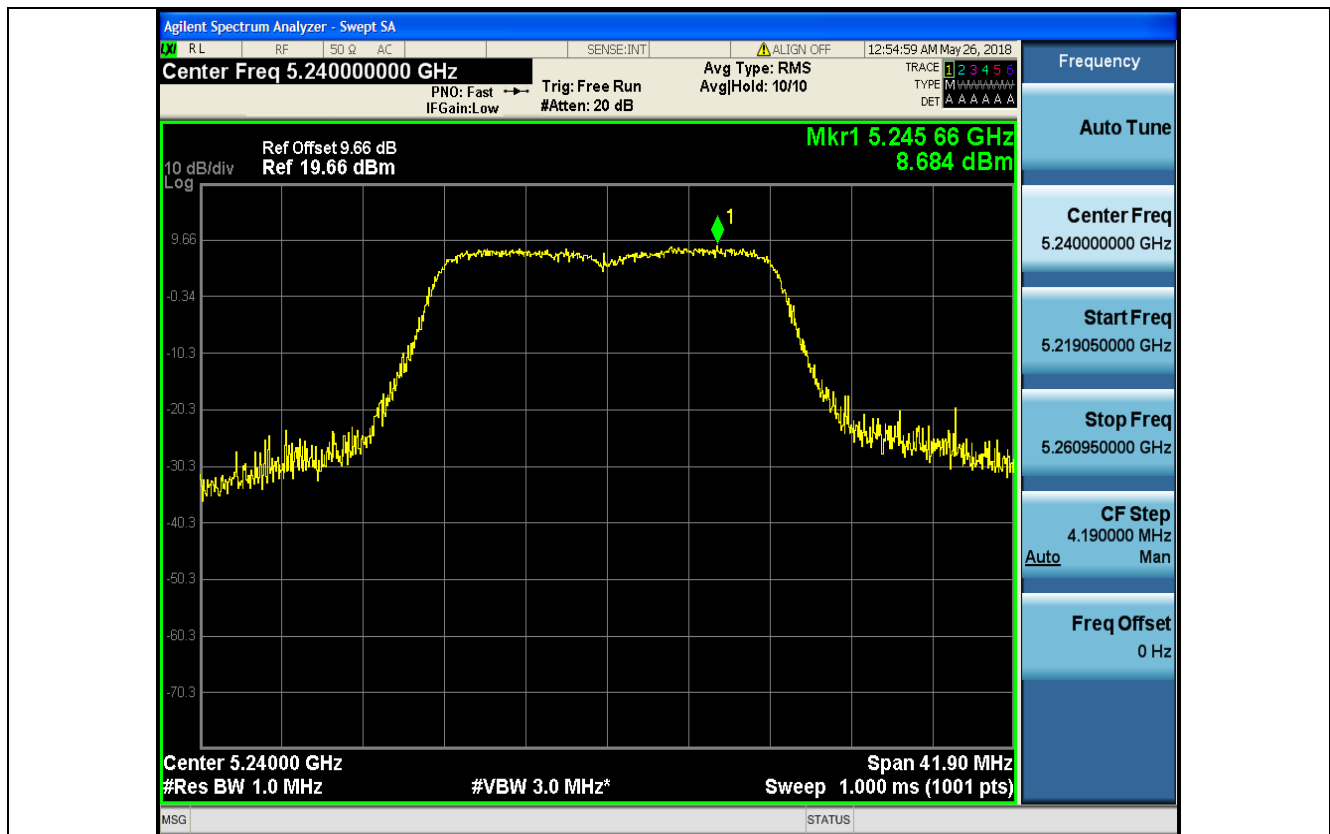


High

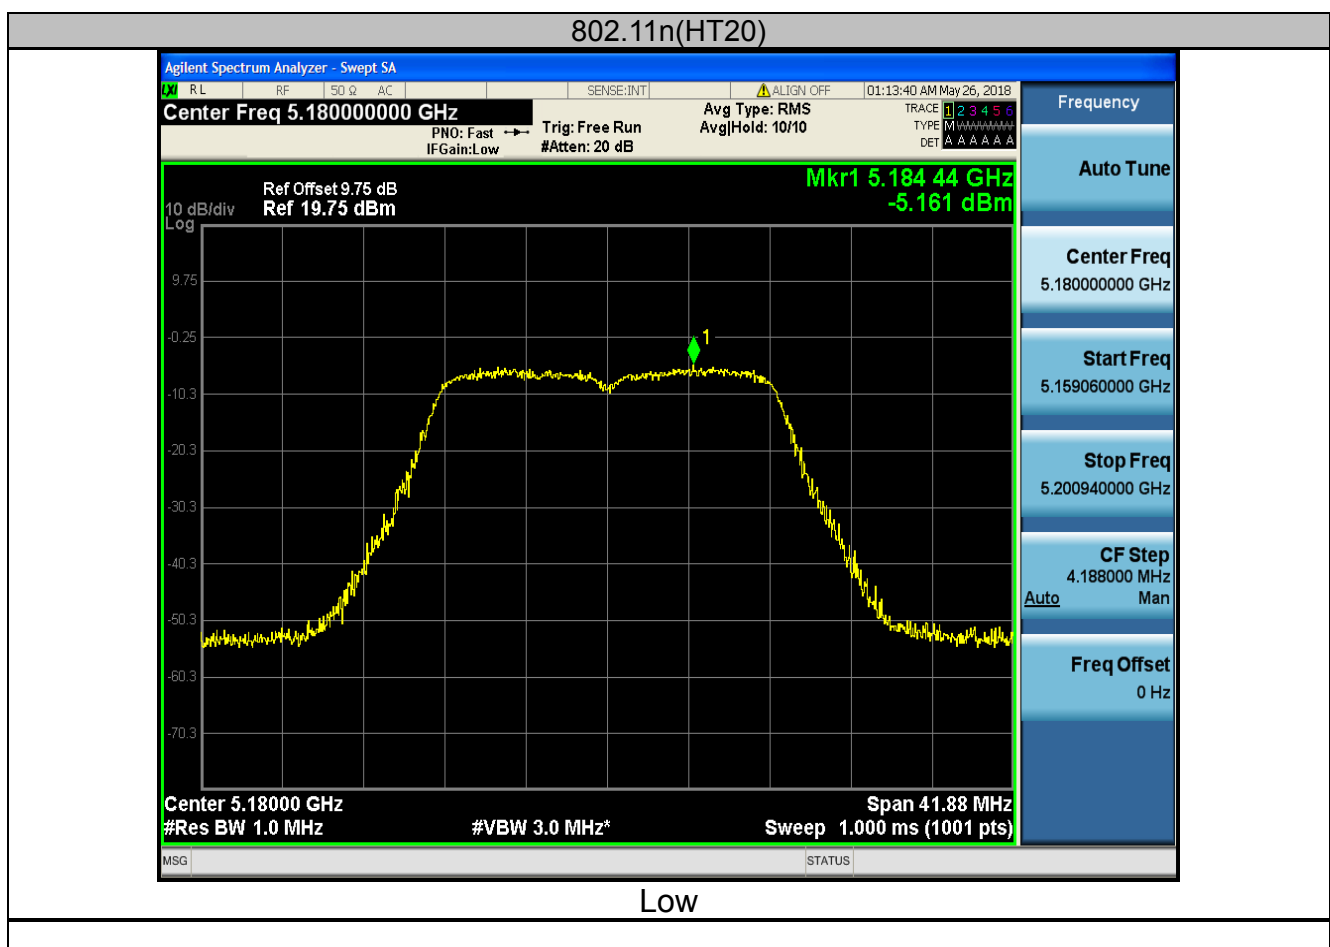

Low

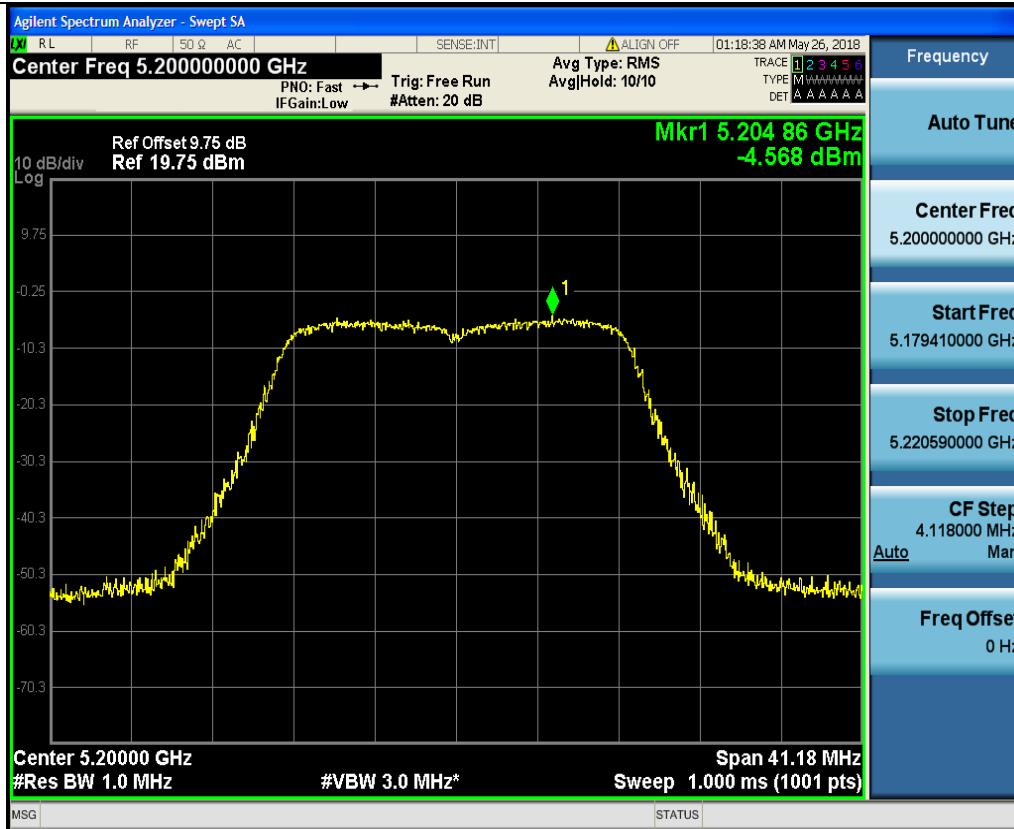


Mid

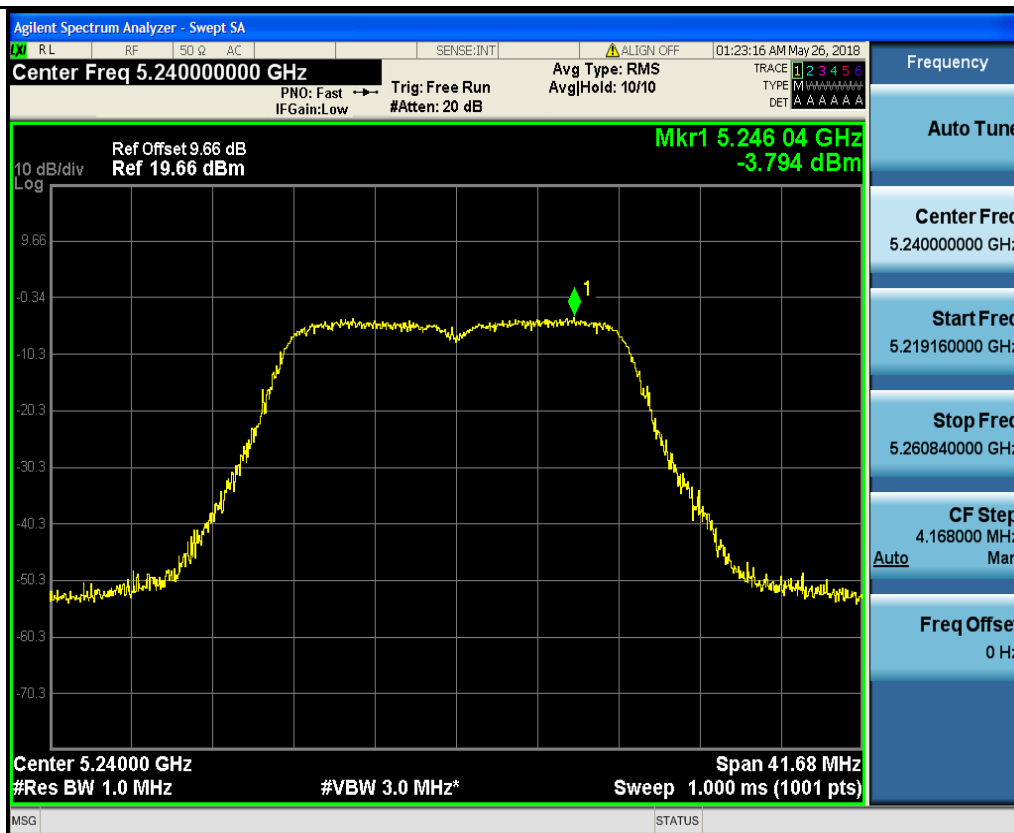


High



## 802.11n(HT40)

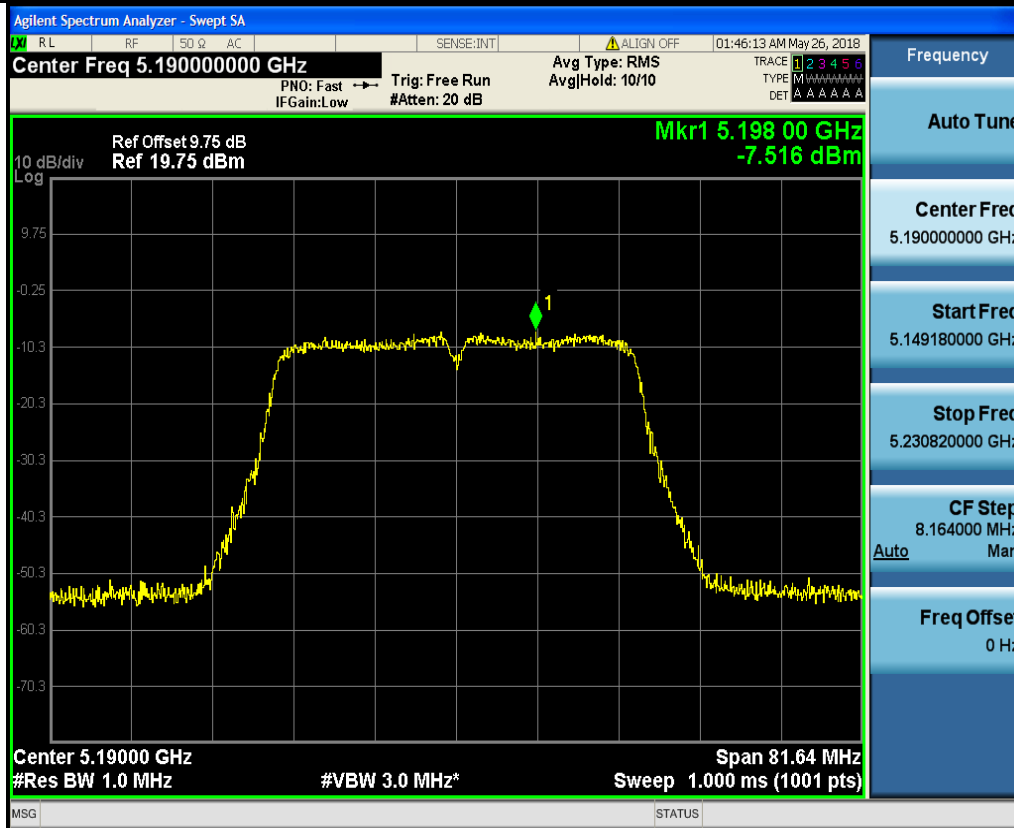


Low

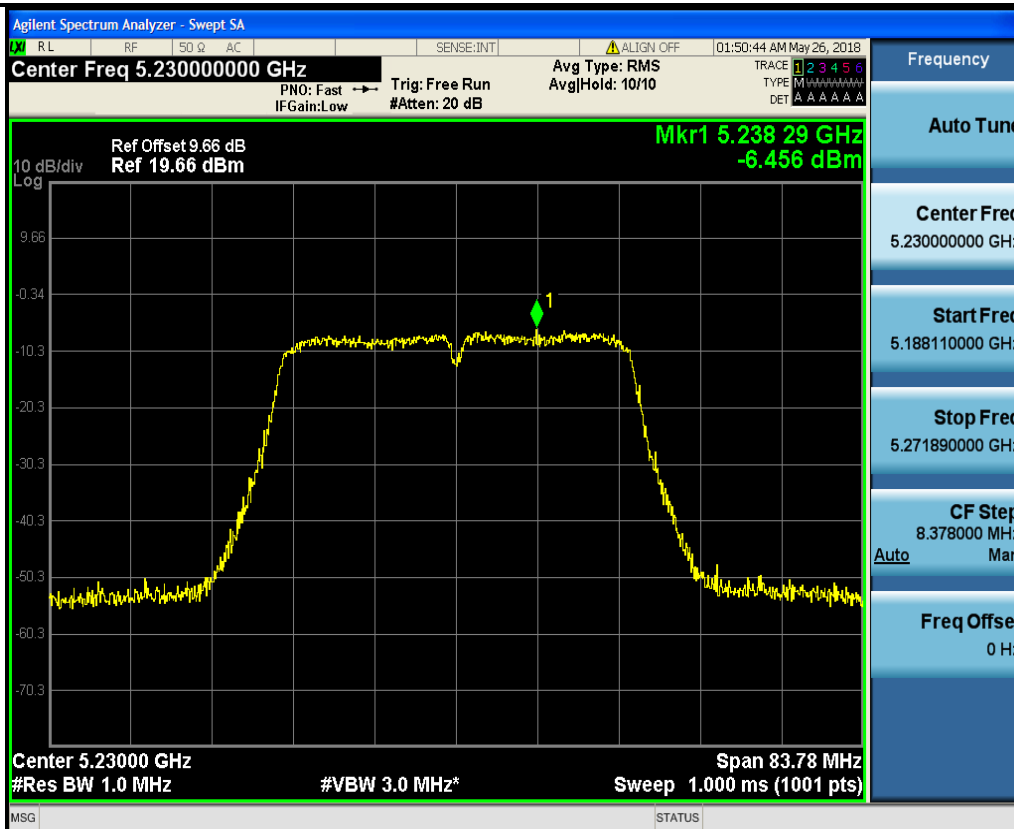


High




## 802.11ac(HT20)

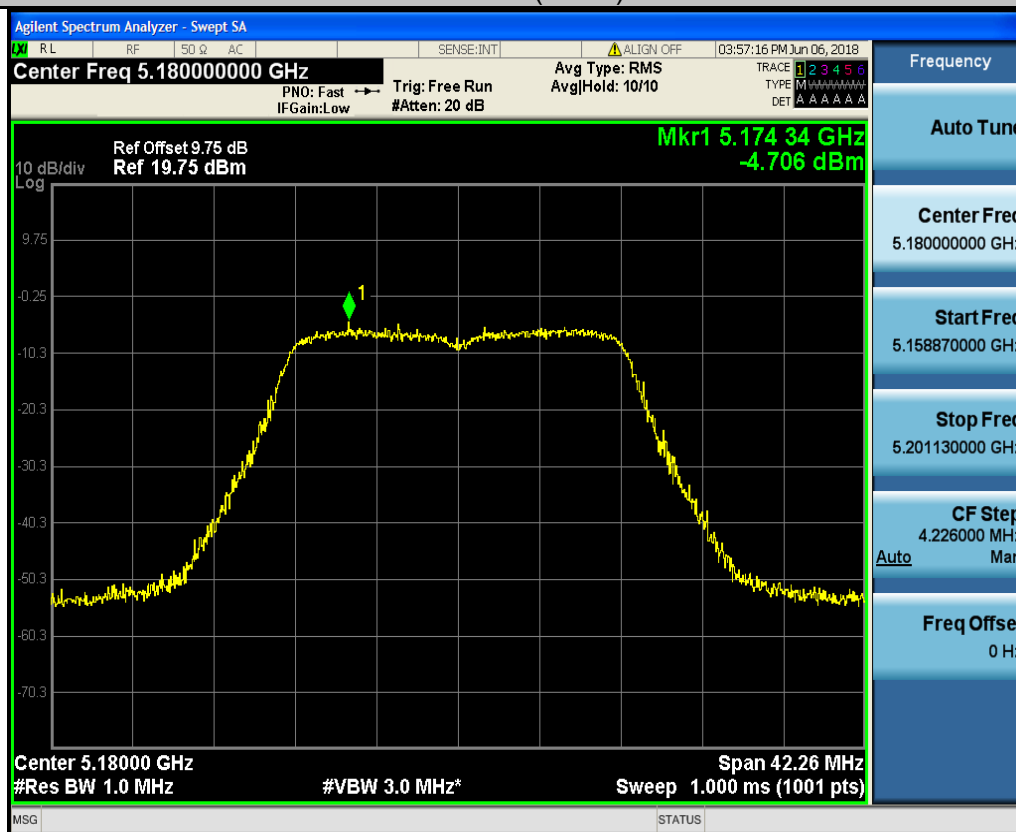

Low

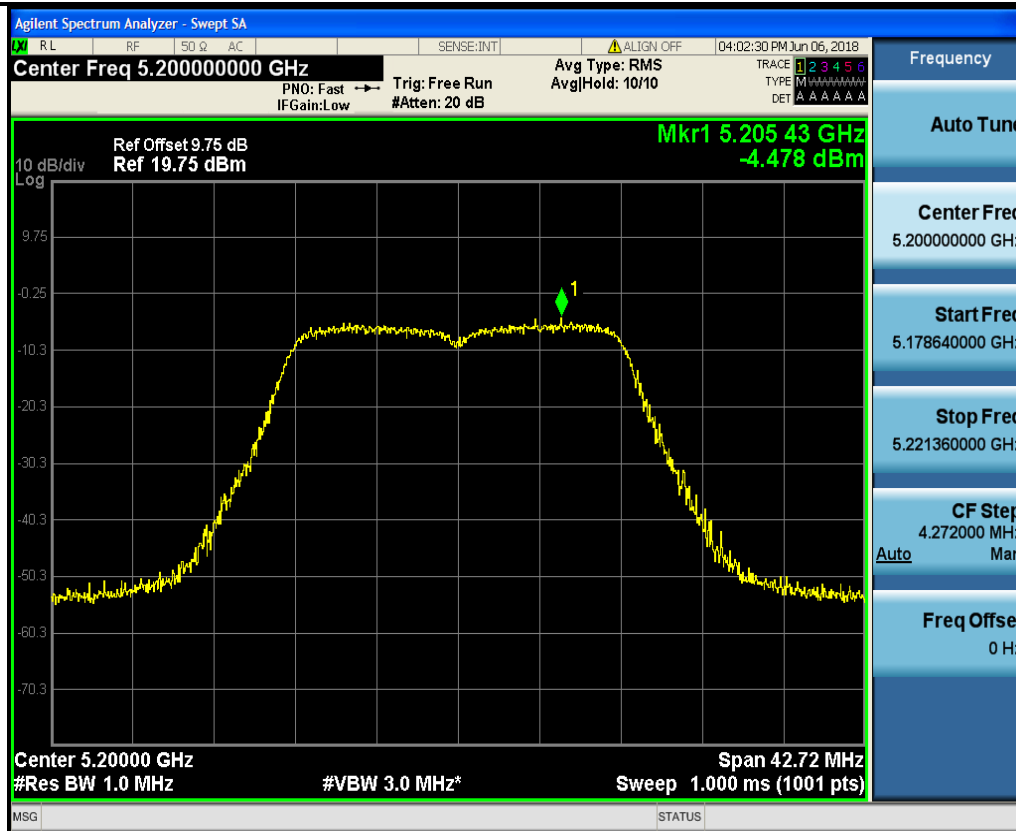

Mid

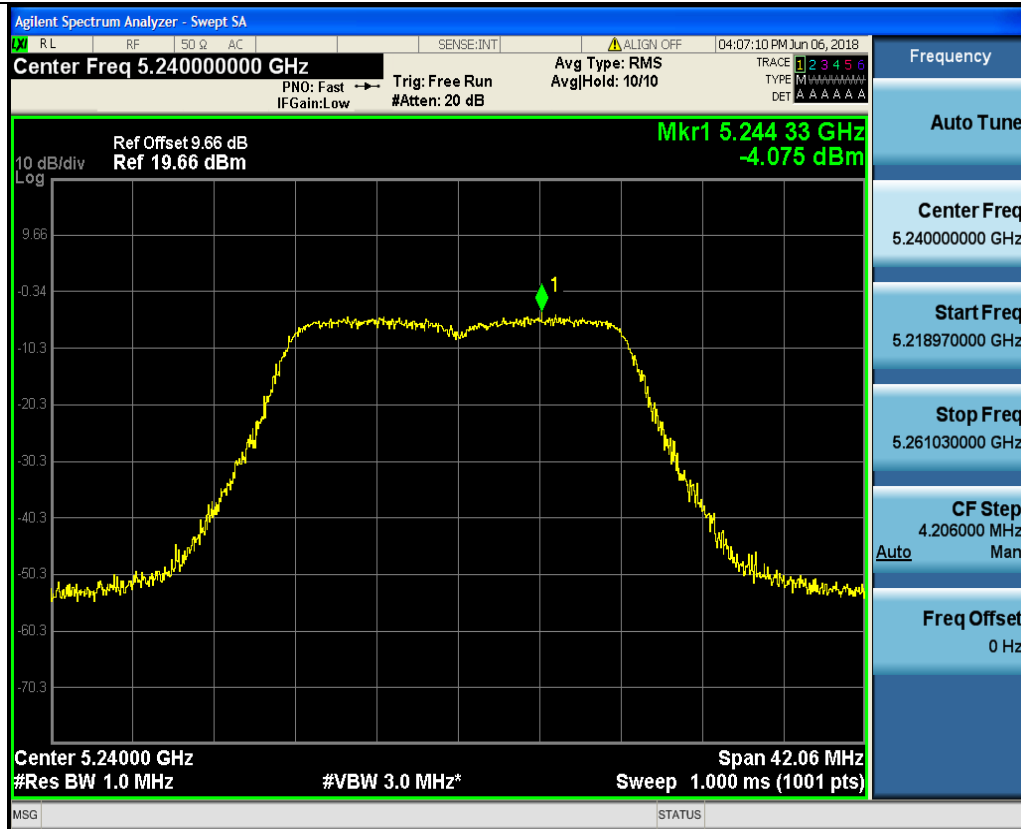


High

## 802.11ac(HT40)




Low

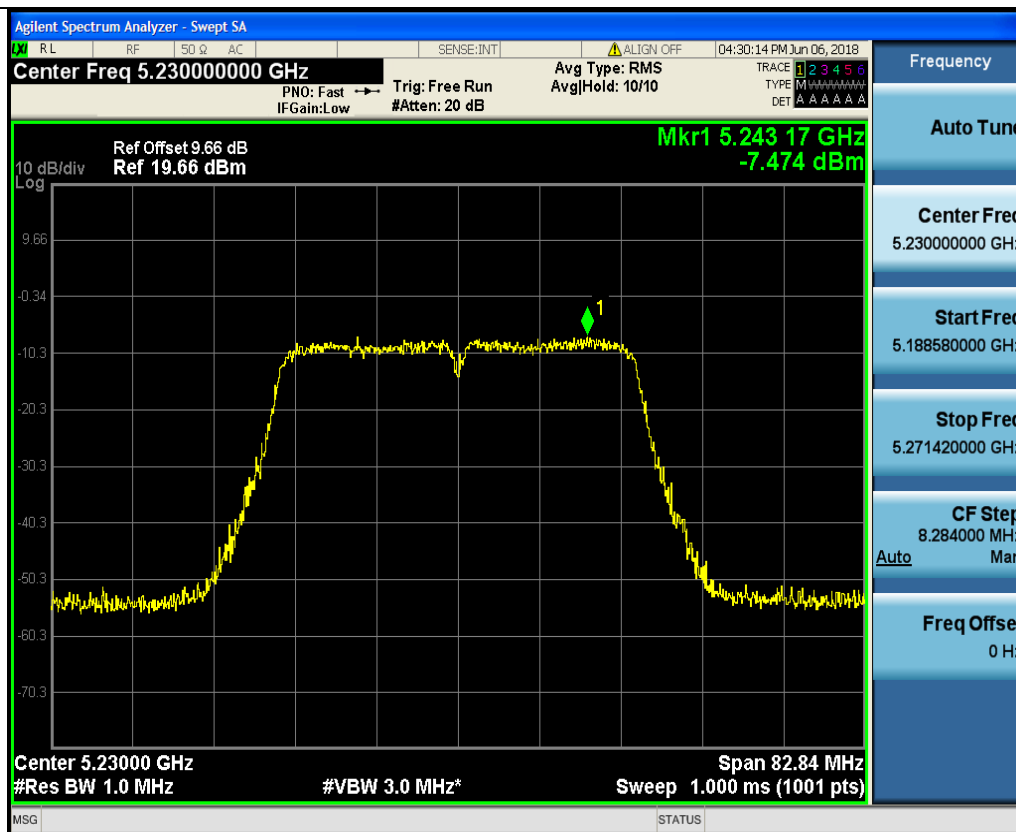

High

## 802.11ac(HT80)

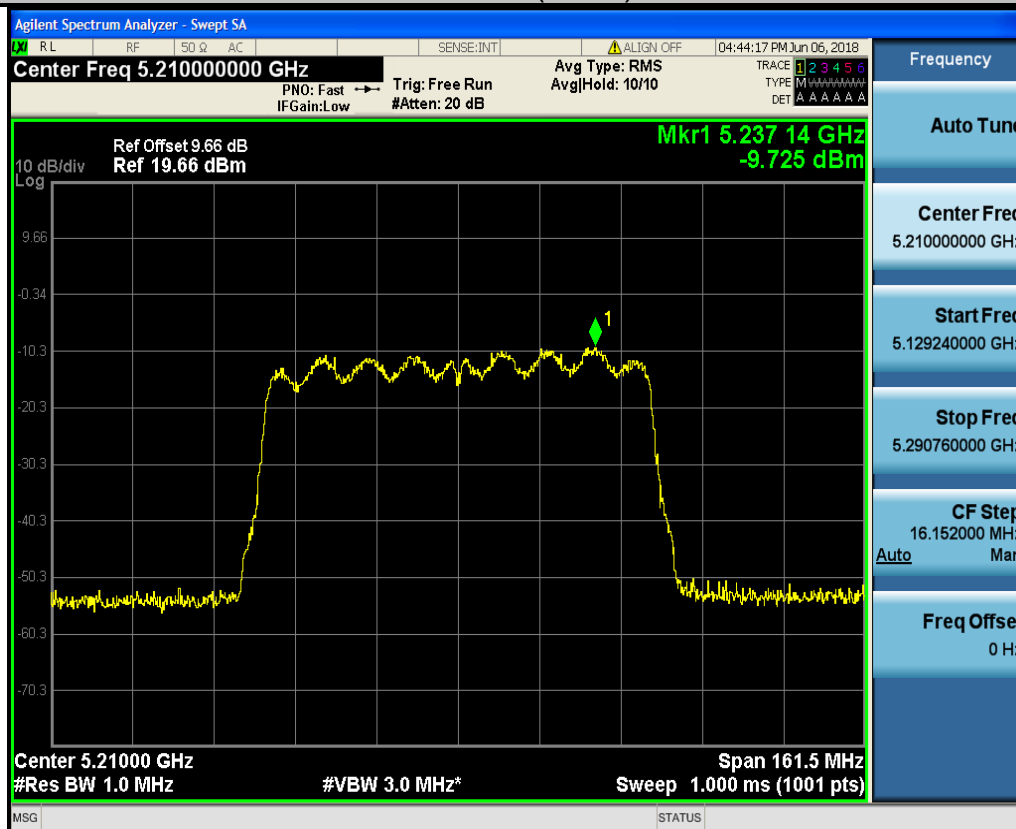

Low




## Band IV (5725 – 5850 MHz)

802.11a



Low

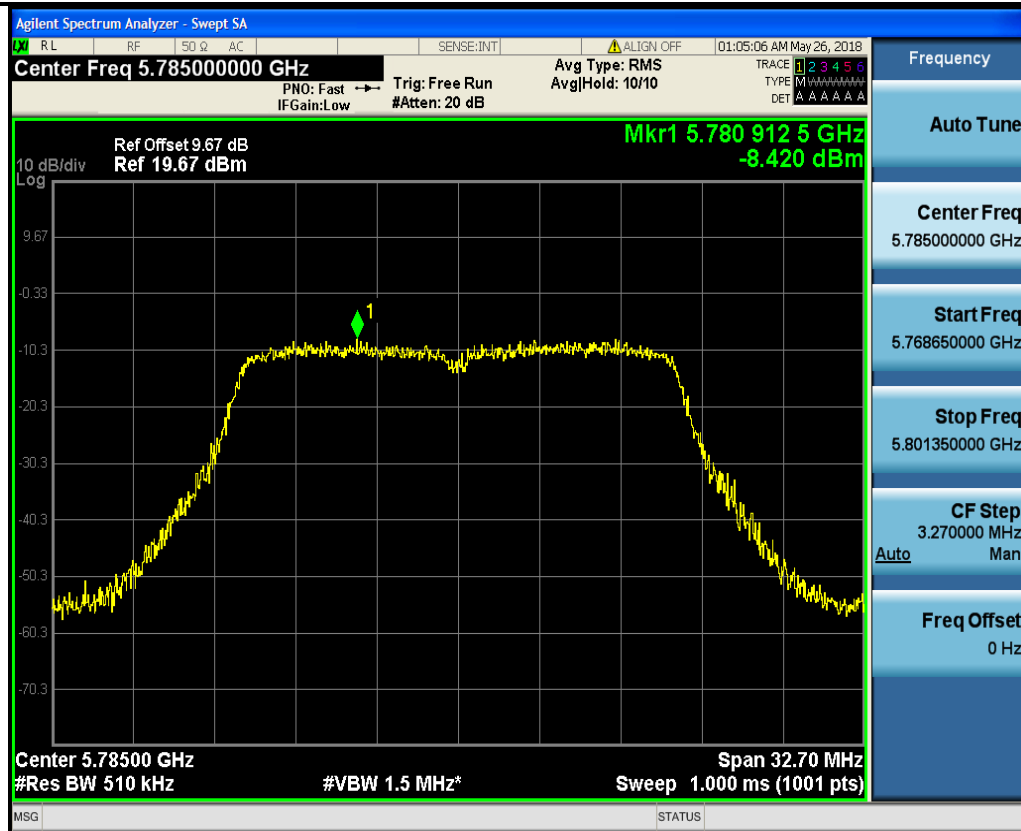


Mid




High

802.11n(HT20)

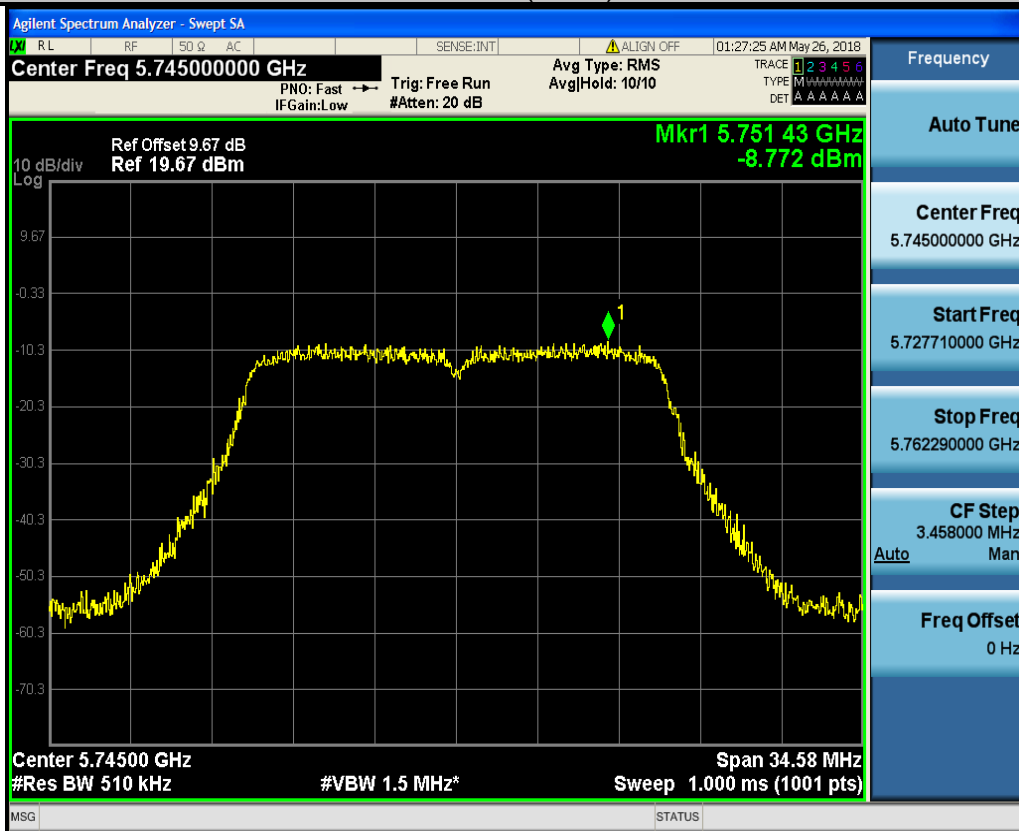

Low



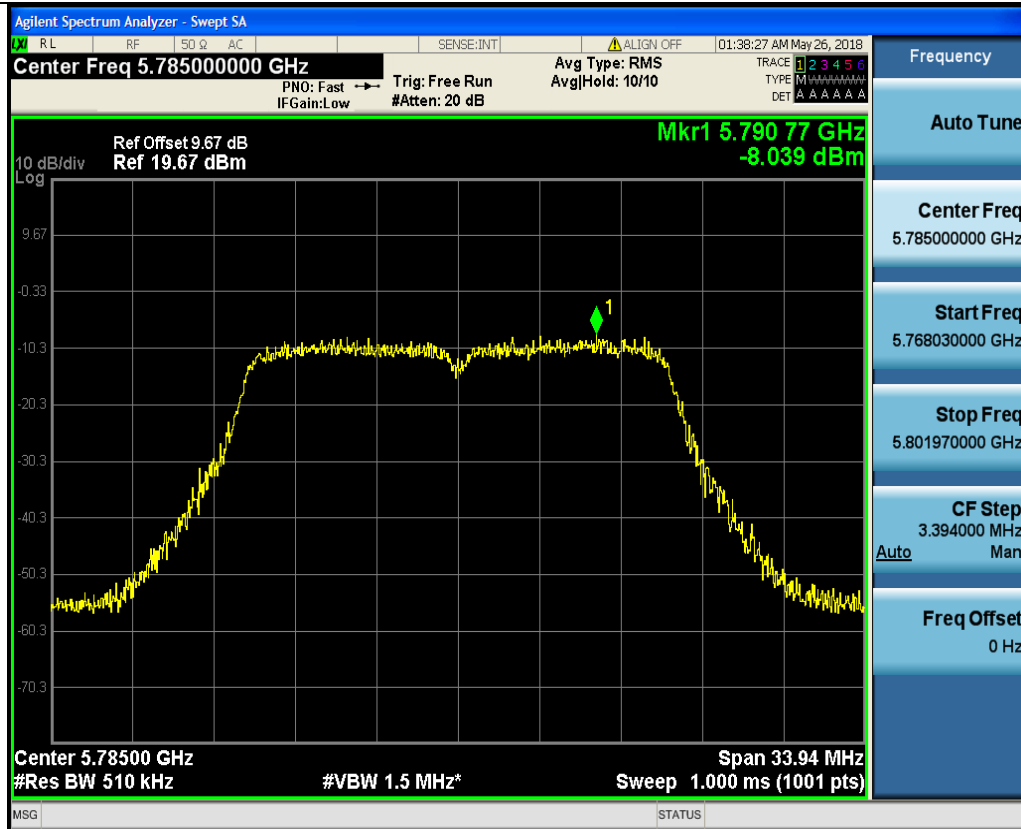

Mid



High



## 802.11n(HT40)



Low




High




## 802.11ac(HT20)



Low

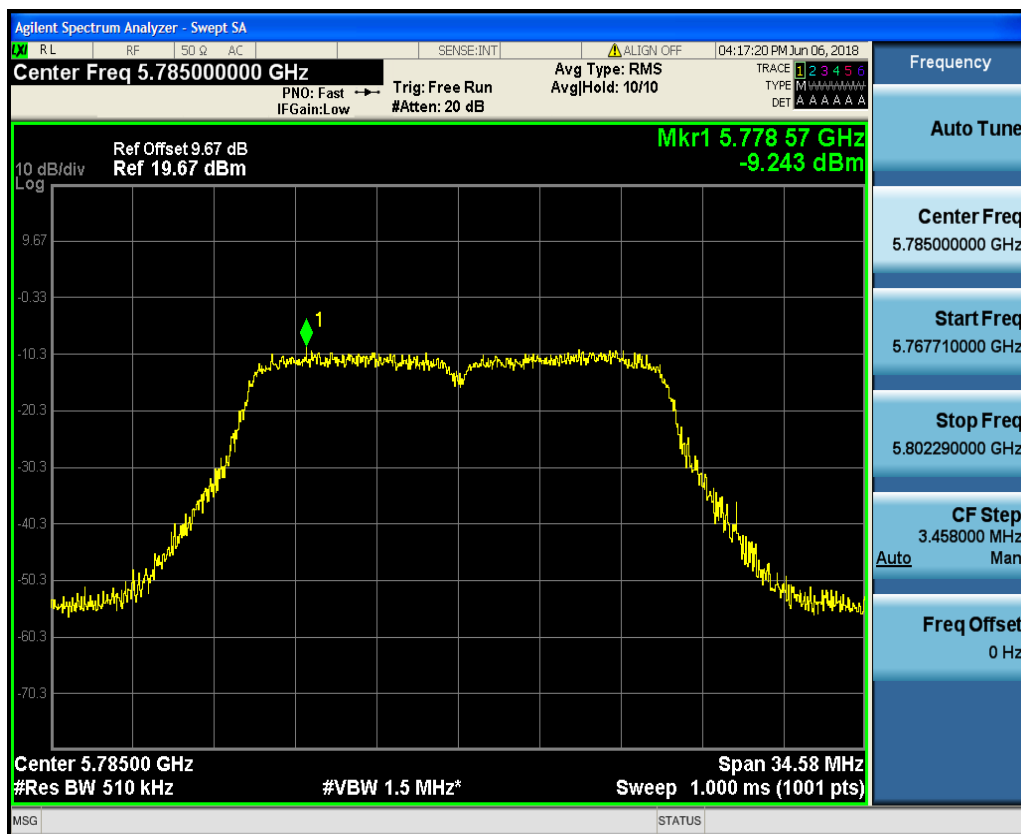

Mid

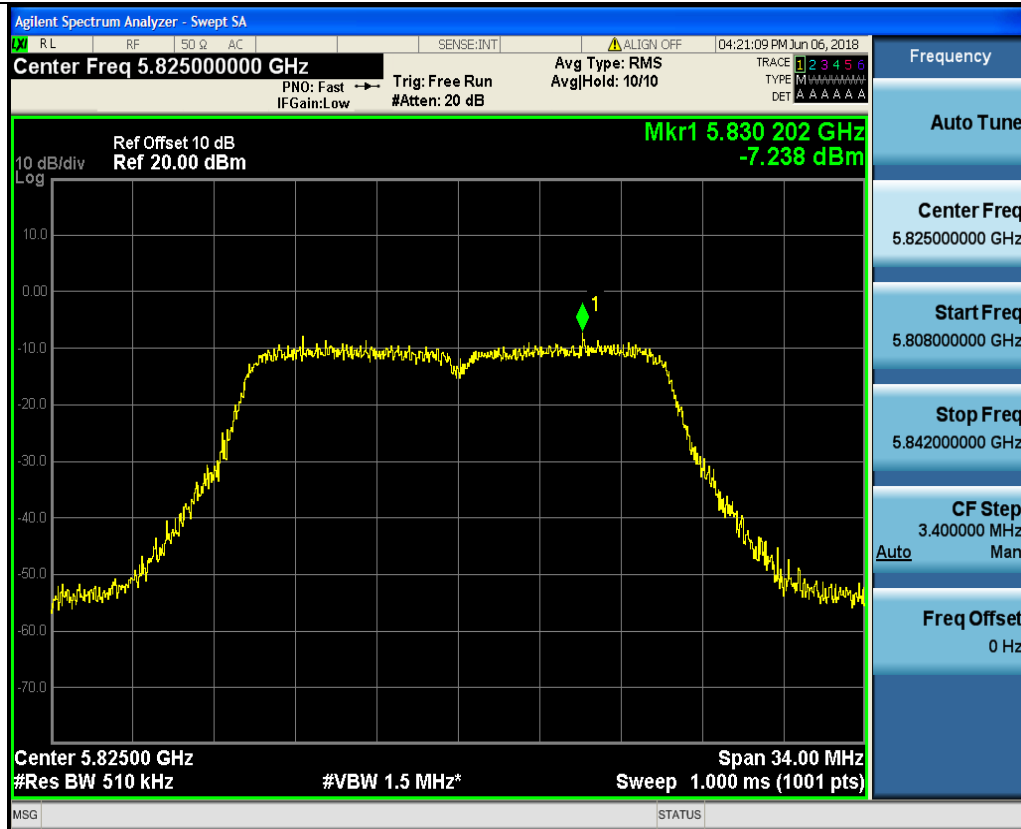

High

802.11ac(HT40)




Low



High

## 802.11ac(HT40)

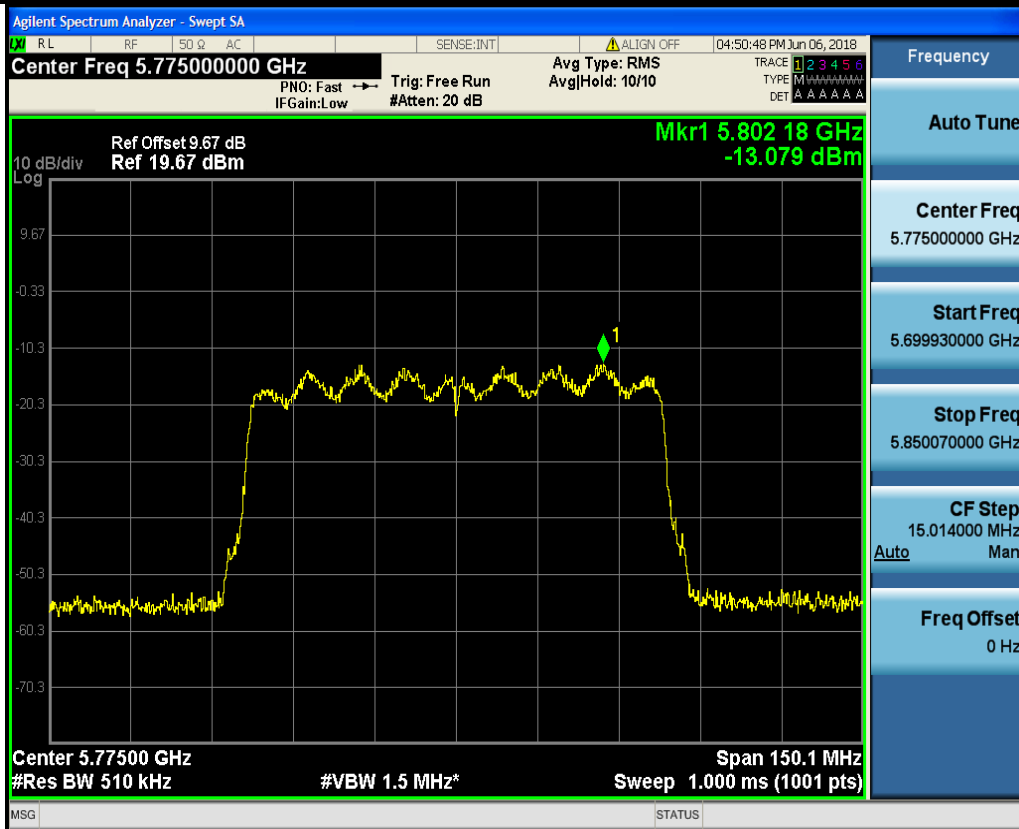


Low



## 4.6. Band edge

### 4.6.1. Test Specification
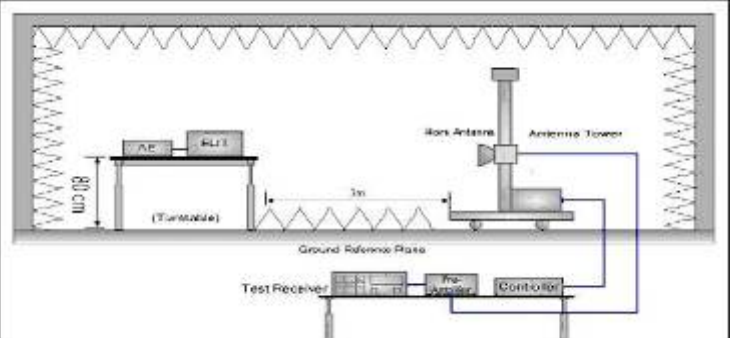
<b>Test Requirement:</b>	FCC CFR47 Part 15E Section 15.407
<b>Test Method:</b>	ANSI C63.10 2013
<b>Limit:</b>	<p>For band I&amp;II&amp;III: <math>E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2 = 68.2 \text{ dB}\mu\text{V}/\text{m}</math>, for <math>\text{EIRP}(\text{dBm}) = -27\text{dBm}</math></p> <p>For transmitters operating in the 5.725-5.85 GHz band:</p> <p>All emissions shall be limited to a level of <math>-27 \text{ dBm}/\text{MHz}</math> at 75 MHz or more above or below the band edge increasing linearly to <math>10 \text{ dBm}/\text{MHz}</math> at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of <math>15.6 \text{ dBm}/\text{MHz}</math> at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of <math>27 \text{ dBm}/\text{MHz}</math> at the band edge.</p> <p>For band IV(5715-5725MHz&amp;5850-5860MHz): <math>E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2 = 78.2 \text{ dB}\mu\text{V}/\text{m}</math>, for <math>\text{EIRP}(\text{dBm}) = -27\text{dBm}</math>;</p> <p>For band IV(other un-restricted band): <math>E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2 = 68.2 \text{ dB}\mu\text{V}/\text{m}</math>, for <math>\text{EIRP}(\text{dBm}) = -27\text{dBm}</math></p>
<b>Test Setup:</b>	 <p>The diagram illustrates the test setup within an anechoic chamber. An Equipment Under Test (EUT) is placed on a rotating table at a height of 0.8m. A distance of 3m is maintained between the EUT and a horn antenna mounted on a variable-height antenna tower. The setup is referenced to a ground reference plane. The signal path includes a test receiver, a pre-amplifier, and a controller.</p>
<b>Test Mode:</b>	Transmitting mode with modulation
<b>Test Procedure:</b>	<ol style="list-style-type: none"><li>1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li><li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li><li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li><li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the</li></ol>



	<p>maximum reading.</p> <p>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasipeak or average method as specified and then reported in a data sheet.</p>
<b>Test Result:</b>	PASS



#### 4.6.2. Test Instruments

Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Receiver	R&S	ESRP3	HKE-005	Sep. 27, 2018
Spectrum analyzer	Agilent	N9020A	HKE-048	Sep. 27, 2018
Preamplifier	EMCI	EMC051845S E	HKE-015	Sep. 27, 2018
Preamplifier	Agilent	83051A	HKE-016	Sep. 27, 2018
Loop antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Sep. 26, 2019
Broadband antenna	Schwarzbeck	VULB 9163	HKE-012	Sep. 26, 2019
Horn antenna	Schwarzbeck	9120D	HKE-013	Sep. 26, 2019
Antenna Mast	Keleto	CC-A-4M	N/A	N/A
Position controller	Taiwan MF	MF7802	HKE-011	Sep. 27, 2018
Radiated test software	Tonscend	TS+ Rev 2.5.0.0	HKE-082	N/A
RF cable (9KHz-1GHz)	Times	381806-001	N/A	N/A
Hf antenna	Schwarzbeck	LB-180400-KF	HKE-031	Sep. 27, 2019
RF cable	Tonscend	1-18G	HKE-099	Sep. 27, 2018
RF cable	Times	1-40G	HKE-034	Sep. 27, 2018

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).





#### 4.6.3. Test Data

Radiated Band Edge Test:

Operation Mode: 802.11a Mode with 5.2G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	52.49	-2.49	50	74	-24	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	51.56	-2.49	49.07	74	-24.93	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.2G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5250	54.27	-2.28	51.99	74	-22.01	peak
5250	/	-2.28	/	54	/	AVG
5350	52.39	-2.11	50.28	74	-23.72	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5250	53.51	-2.28	51.23	74	-22.77	peak
5250	/	-2.28	/	54	/	AVG
5350	0.43	-2.11	-1.68	74	-75.68	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11n20 Mode with 5.2G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	54.16	-2.49	51.67	74	-22.33	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	51.33	-2.49	48.84	74	-25.16	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.2G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5250	52.41	-2.28	50.13	74	-23.87	peak
5250	/	-2.28	/	54	/	AVG
5350	50.67	-2.11	48.56	74	-25.44	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5250	53.52	-2.28	51.24	74	-22.76	peak
5250	/	-2.28	/	54	/	AVG
5350	50.19	-2.11	48.08	74	-25.92	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11 n40 Mode with 5.2G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	52.38	-2.49	49.89	74	-24.11	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	50.84	-2.49	48.35	74	-25.65	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.2G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5250	53.59	-2.28	51.31	74	-22.69	peak
5250	/	-2.28	/	54	/	AVG
5350	51.05	-2.11	48.94	74	-25.06	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5250	54.47	-2.28	52.19	74	-21.81	peak
5250	/	-2.28	/	54	/	AVG
5350	50.28	-2.11	48.17	74	-25.83	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11 ac20 Mode with 5.2G TX CH Low

## Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	53.96	-2.49	51.47	74	-22.53	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

## Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	51.44	-2.49	48.95	74	-25.05	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.2G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5250	54.25	-2.28	51.97	74	-22.03	peak
5250	/	-2.28	/	54	/	AVG
5350	50.87	-2.11	48.76	74	-25.24	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5250	53.18	-2.28	50.9	74	-23.1	peak
5250	/	-2.28	/	54	/	AVG
5350	50.32	-2.11	48.21	74	-25.79	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						





Operation Mode: 802.11 ac40 Mode with 5.2G TX CH Low

## Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	54.62	-2.49	52.13	74	-21.87	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

## Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	52.49	-2.49	50	74	-24	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.2G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5250	55.05	-2.28	52.77	74	-21.23	peak
5250	/	-2.28	/	54	/	AVG
5350	53.18	-2.11	51.07	74	-22.93	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5250	53.23	-2.28	50.95	74	-23.05	peak
5250	/	-2.28	/	54	/	AVG
5350	50.87	-2.11	48.76	74	-25.24	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11 ac80 Mode with 5.2G TX CH Low

## Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	54.34	-2.49	51.85	74	-22.15	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

## Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	52.01	-2.49	49.52	74	-24.48	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.2G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5250	55.44	-2.28	53.16	74	-20.84	peak
5250	/	-2.28	/	54	/	AVG
5350	52.69	-2.11	50.58	74	-23.42	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5250	54.27	-2.28	51.99	74	-22.01	peak
5250	/	-2.28	/	54	/	AVG
5350	51.38	-2.11	49.27	74	-24.73	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11a Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5460	53.43	-2.06	51.37	74	-22.63	peak
5460	/	-2.06	/	54	/	AVG
5725	50.65	-1.96	48.69	74	-25.31	peak
5725	/	-1.96	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5460	54.74	-2.06	52.68	74	-21.32	peak
5460	/	-2.06	/	54	/	AVG
5725	49.52	-1.96	47.56	74	-26.44	peak
5725	/	-1.96	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	52.73	-1.97	50.76	74	-23.24	peak
5850	/	-1.97	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	49.85	-1.97	47.88	74	-26.12	peak
5850	/	-1.97	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11n20 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5460	53.74	-2.06	51.68	74	-22.32	peak
5460	/	-2.06	/	54	/	AVG
5725	50.51	-1.96	48.55	74	-25.45	peak
5725	/	-1.96	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5460	52.49	-2.06	50.43	74	-23.57	peak
5460	/	-2.06	/	54	/	AVG
5725	49.35	-1.96	47.39	74	-26.61	peak
5725	/	-1.96	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G  
Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	54.16	-1.97	52.19	74	-21.81	peak
5850	/	-1.97	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	50.37	-1.97	48.4	74	-25.6	peak
5850	/	-1.97	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						





Operation Mode: 802.11n40 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5460	50.59	-2.06	48.53	74	-25.47	peak
5460	/	-2.06	/	54	/	AVG
5725	53.47	-1.96	51.51	74	-22.49	peak
5725	/	-1.96	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5460	53.26	-2.06	51.2	74	-22.8	peak
5460	/	-2.06	/	54	/	AVG
5725	50.77	-1.96	48.81	74	-25.19	peak
5725	/	-1.96	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	53.17	-1.97	51.2	74	-22.8	peak
5850	/	-1.97	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	51.4	-1.97	49.43	74	-24.57	peak
5850	/	-1.97	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11ac20 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5460	54.53	-2.06	52.47	74	-21.53	peak
5460	/	-2.06	/	54	/	AVG
5725	51.76	-1.96	49.8	74	-24.2	peak
5725	/	-1.96	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5460	53.69	-2.06	51.63	74	-22.37	peak
5460	/	-2.06	/	54	/	AVG
5725	50.71	-1.96	48.75	74	-25.25	peak
5725	/	-1.96	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	53.76	-1.97	51.79	74	-22.21	peak
5850	/	-1.97	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	50.95	-1.97	48.98	74	-25.02	peak
5850	/	-1.97	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11ac40 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5460	54.62	-2.06	52.56	74	-21.44	peak
5460	/	-2.06	/	54	/	AVG
5725	51.29	-1.96	49.33	74	-24.67	peak
5725	/	-1.96	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5460	54.74	-2.06	52.68	74	-21.32	peak
5460	/	-2.06	/	54	/	AVG
5725	50.68	-1.96	48.72	74	-25.28	peak
5725	/	-1.96	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	54.28	-1.97	52.31	74	-21.69	peak
5850	/	-1.97	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	51.43	-1.97	49.46	74	-24.54	peak
5850	/	-1.97	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11ac80 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5460	55.47	-2.06	53.41	74	-20.59	peak
5460	/	-2.06	/	54	/	AVG
5725	53.61	-1.96	51.65	74	-22.35	peak
5725	/	-1.96	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5460	54.16	-2.06	52.1	74	-21.9	peak
5460	/	-2.06	/	54	/	AVG
5725	52.09	-1.96	50.13	74	-23.87	peak
5725	/	-1.96	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	54.25	-1.97	52.28	74	-21.72	peak
5850	/	-1.97	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	51.92	-1.97	49.95	74	-24.05	peak
5850	/	-1.97	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						







## 4.7. Spurious Emission

### 4.7.1.1. Test Specification

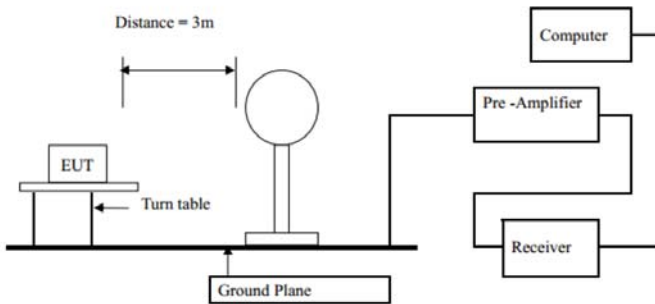Test Requirement:	FCC CFR47 Part 15 Section 15.407 & 15.209 & 15.205				
Test Method:	KDB 789033 D02 v01r04				
Frequency Range:	9kHz to 40GHz				
Measurement Distance:	3 m				
Antenna Polarization:	Horizontal & Vertical				
Operation mode:	Transmitting mode with modulation				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit:	Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,				
	Frequency		Field Strength (microvolts/meter)	Measurement Distance (meters)	
	0.009-0.490		2400/F(KHz)	300	
	0.490-1.705		24000/F(KHz)	30	
	1.705-30		30	30	
	30-88		100	3	
	88-216		150	3	
	216-960		200	3	
	Above 960		500	3	
	Frequency		Limit (dBuV/m @3m)	Detector	
	Above 1G		74.0	Peak	
			54.0	Average	
Test setup:	For radiated emissions below 30MHz				
					
	30MHz to 1GHz				

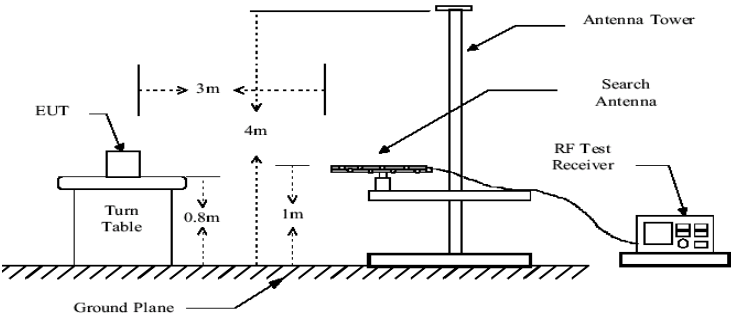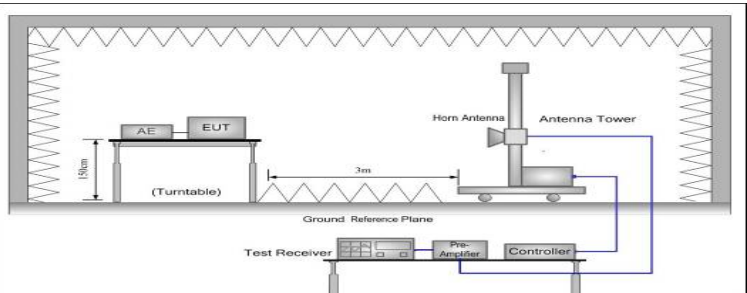	 <p>Above 1GHz</p> 
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotating table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol>
<b>Test results:</b>	PASS




#### 4.7.2. Test Data

Remark: We tested all Channels, the worst case was recorded.

Please refer to following diagram for individual


Below 1GHz

Horizontal

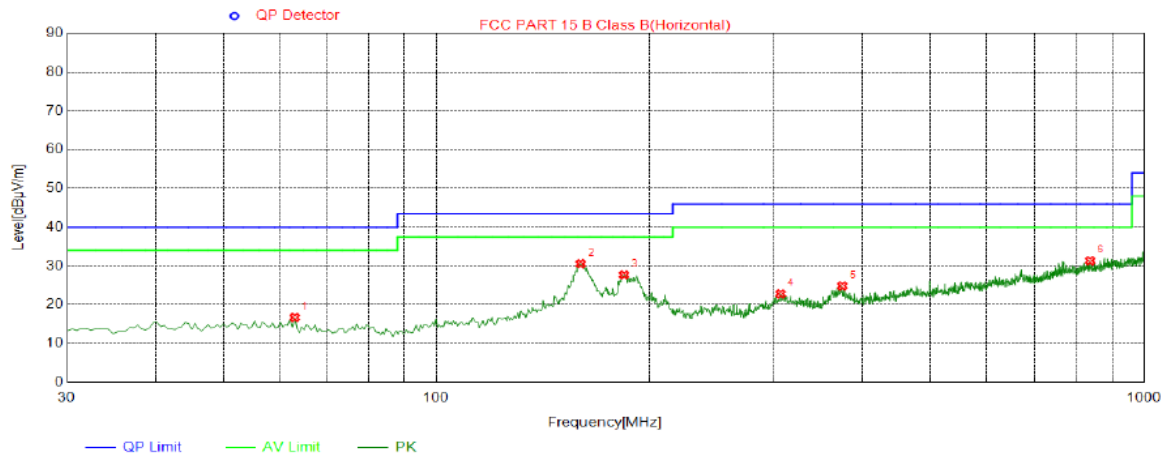

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Height [cm]	Angle [°]	Polarity
1	62.9800	16.69	-16.71	40.00	23.31	PK	100	251	Horizontal
2	159.9800	30.55	-9.12	43.50	12.95	PK	100	35	Horizontal
3	184.2300	27.69	-13.69	43.50	15.81	PK	100	282	Horizontal
4	306.9350	22.79	-13.03	46.00	23.21	PK	100	108	Horizontal
5	375.3200	24.83	-11.16	46.00	21.17	PK	100	289	Horizontal
6	838.4950	31.35	-1.64	46.00	14.65	PK	100	196	Horizontal

Remark: Transd = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

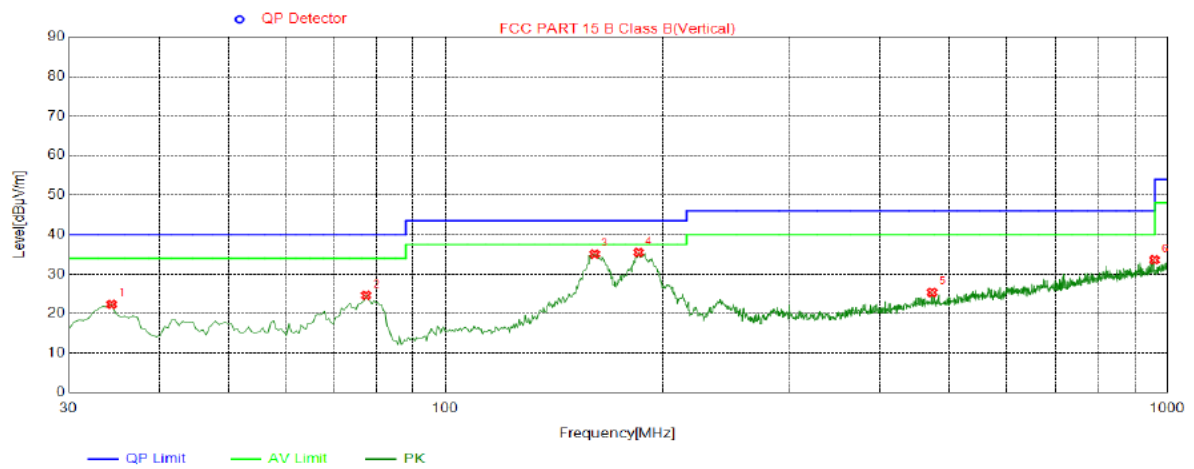**Vertical**

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Height [cm]	Angle [°]	Polarity
1	34.3650	22.32	-17.47	40.00	17.68	PK	100	10	Vertical
2	77.5300	24.62	-18.90	40.00	15.38	PK	100	33	Vertical
3	160.9500	35.09	-9.29	43.50	8.41	PK	100	243	Vertical
4	185.2000	35.49	-13.81	43.50	8.01	PK	100	346	Vertical
5	473.2900	25.37	-8.35	46.00	20.63	PK	100	118	Vertical
6	959.2600	33.61	-0.22	46.00	12.39	PK	100	71	Vertical

Remark: Transd = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

**Above 1GHz**

LOW CH 36 (802.11 a Mode with 5.2G)/5180

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	62.73	-4.59	58.14	74	-15.86	peak
3647	47.06	-4.59	42.47	54	-11.53	AVG
10360	56.12	3.74	59.86	74	-14.14	peak
10360	41.59	3.74	45.33	54	-8.67	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	62.25	-4.59	57.66	74	-16.34	peak
3647	46.64	-4.59	42.05	54	-11.95	AVG
10360	55.87	3.74	59.61	74	-14.39	peak
10360	42.09	3.74	45.83	54	-8.17	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MID CH40 (802.11 a Mode with 5.2G)/5200

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	62.38	-4.59	57.79	74	-16.21	peak
3647	46.54	-4.59	41.95	54	-12.05	AVG
10400	55.61	3.74	59.35	74	-14.65	peak
10400	41.75	3.74	45.49	54	-8.51	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	62.13	-4.59	57.54	74	-16.46	peak
3647	46.27	-4.59	41.68	54	-12.32	AVG
10400	55.86	3.74	59.6	74	-14.4	peak
10400	41.09	3.74	44.83	54	-9.17	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



HIGH CH 48 (802.11a Mode with 5.2G)/5240  
Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
3647	61.84	-4.59	57.25	74	-16.75	
3647	45.92	-4.59	41.33	54	-12.67	AVG
10480	55.36	3.75	59.11	74	-14.89	peak
10480	40.55	3.75	44.3	54	-9.7	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
3647	61.49	-4.59	56.9	74	-17.1	
3647	45.36	-4.59	40.77	54	-13.23	AVG
10480	55.12	3.75	58.87	74	-15.13	peak
10480	40.07	3.75	43.82	54	-10.18	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown "—" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



LOW CH 149 (802.11 a Mode with 5.8G)/5745

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	62.35	-4.59	57.76	74	-16.24	peak
3647	46.68	-4.59	42.09	54	-11.91	AVG
11570	56.04	4.21	60.25	74	-13.75	peak
11570	41.26	4.21	45.47	54	-8.53	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	61.92	-4.59	57.33	74	-16.67	peak
3647	46.37	-4.59	41.78	54	-12.22	AVG
11570	55.65	4.21	59.86	74	-14.14	peak
11570	40.83	4.21	45.04	54	-8.96	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						





MID CH157 (802.11 a Mode with 5.8G)/5785

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	61.48	-4.59	56.89	74	-17.11	peak
3647	46.52	-4.59	41.93	54	-12.07	AVG
11570	55.75	4.21	59.96	74	-14.04	peak
11570	40.24	4.21	44.45	54	-9.55	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	61.03	-4.59	56.44	74	-17.56	peak
3647	45.26	-4.59	40.67	54	-13.33	AVG
11570	55.17	4.21	59.38	74	-14.62	peak
11570	39.89	4.21	44.1	54	-9.9	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



HIGH CH 165 (802.11a Mode with 5.8G)/5825

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	61.44	-4.59	56.85	74	-17.15	peak
3647	45.67	-4.59	41.08	54	-12.92	AVG
11650	55.02	4.84	59.86	74	-14.14	peak
11650	41.19	4.84	46.03	54	-7.97	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	61.13	-4.59	56.54	74	-17.46	peak
3647	45.29	-4.59	40.7	54	-13.3	AVG
11650	54.85	4.84	59.69	74	-14.31	peak
11650	40.44	4.84	45.28	54	-8.72	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



## 4.8. Frequency Stability Measurement

### 4.8.1. Test Specification

<b>Test Requirement:</b>	FCC Part15 Section 15.407(g) &Part2 J Section 2.1055
<b>Test Method:</b>	ANSI C63.10: 2013
<b>Limit:</b>	The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 35 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.
<b>Test Setup:</b>	<pre>graph LR; SA[Spectrum Analyzer] --- EUT[EUT]; EUT --- TCh[Temperature Chamber]; TCh --- P[AC/DC Power supply];</pre>
<b>Test Procedure:</b>	The EUT was placed inside the environmental test chamber and powered by nominal AC/DC voltage. b. Turn the EUT on and couple its output to a spectrum analyzer. c. Turn the EUT off and set the chamber to the highest temperature specified. d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature. f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.
<b>Test Result:</b>	PASS
<b>Remark:</b>	N/A

**Test Result as follows:**

Mode	Voltage (V)	FHL (5180MHz)	Deviation (KHz)	FHH (5240MHz)	Deviation (KHz)
5.2G Band	132 V	5179.989	11	5239.988	12
	120 V	5179.987	13	5239.984	16
	108 V	5179.985	15	5239.986	14

Mode	Temperature (°C)	FHL (5180MHz)	Deviation (KHz)	FHH (5240MHz)	Deviation (KHz)
5.2G Band	-30	5179.971	29	5239.969	31
	-20	5179.969	31	5239.966	34
	-10	5179.973	27	5239.977	23
	0	5179.975	25	5239.978	22
	10	5179.971	29	5239.983	17
	20	5179.988	12	5239.985	15
	30	5179.986	14	5239.981	19
	40	5179.977	23	5239.978	22
	50	5179.974	26	5239.972	28



Mode	Voltage (V)	FHL (5745MHz)	Deviation (KHz)	FHH (5825MHz)	Deviation (KHz)
5.8G Band	132 V	5744.985	15	5824.986	14
	120 V	5744.986	14	5824.984	16
	108 V	5744.988	12	5824.986	14

Mode	Temperature (°C)	FHL (5745MHz)	Deviation (KHz)	FHH (5825MHz)	Deviation (KHz)
5.8G Band	-30	5744.968	32	5824.971	29
	-20	5744.967	33	5824.968	32
	-10	5744.978	22	5824.973	27
	0	5744.975	25	5824.974	26
	10	5744.977	23	5824.978	22
	20	5744.986	14	5824.985	15
	30	5744.979	21	5824.976	24
	40	5744.981	19	5824.979	21
	50	5744.985	15	5824.974	26



## 4.9. ANTENNA REQUIREMENT

### Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.249, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### Refer to statement below for compliance.


The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### Antenna Connected Construction

The antenna used in this product is a PCB Antenna, The directional gains of antenna used for transmitting is 1dBi.


### WIFI ANTENNA

Note: Only the circled Antenna is available, the other one Antenna not be used.

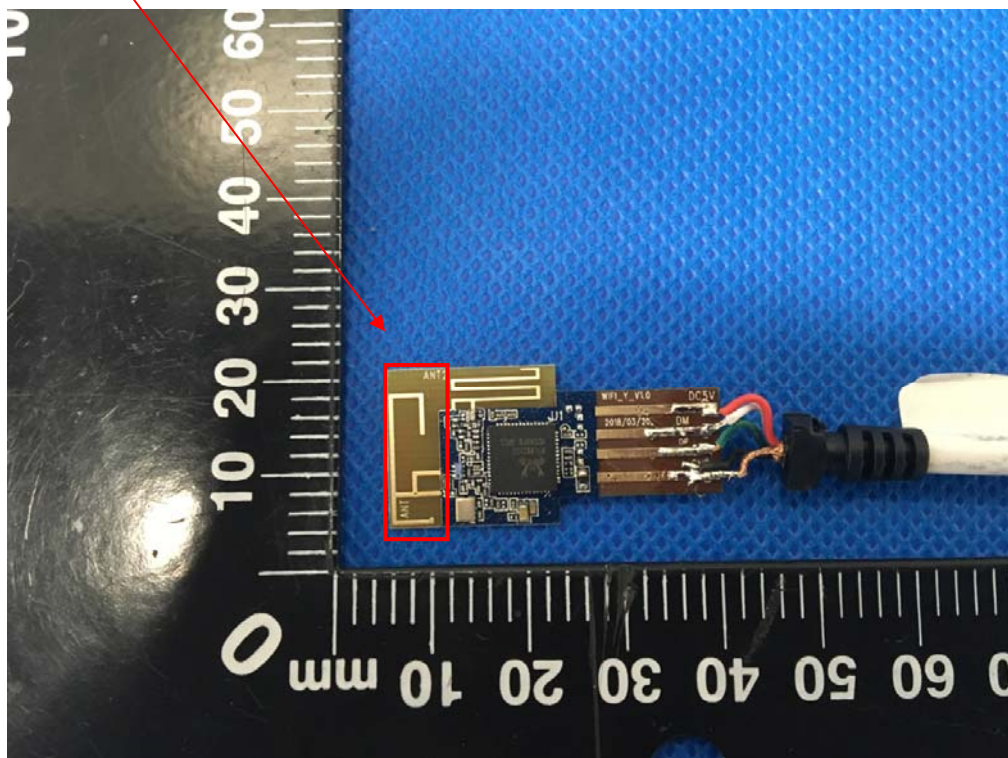

#### 4.10. Photographs of Test Setup

Radiated Emission

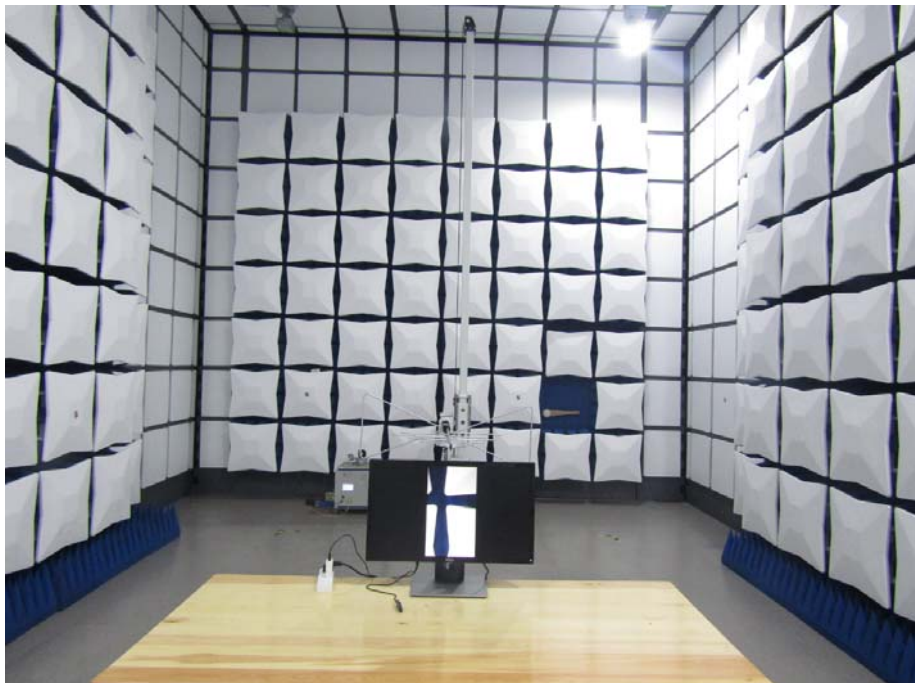



## Conducted Emission

