


16:03:39 JAN 26, 2001
 R-8767 DS720i FCC 15.207 CE TS LEAD-HOT
 REF 85.0 dBμV AT 10 dB



START 450 kHz STOP 30.00 MHz
 #RES BW 9.0 kHz #SWP 20.0 sec

Customer:	Detection Systems
Test Sample:	10.525 GHz Field Disturbance Sensor
Model No:	DS720i
Test Method:	FCC 15.207 Conducted Emissions 450 kHz to 30 MHz
Notes:	Lead Tested: Hot Detector Function: Peak
Date:	January 26, 2001
Tech:	TS
Sheet:	1 of 2

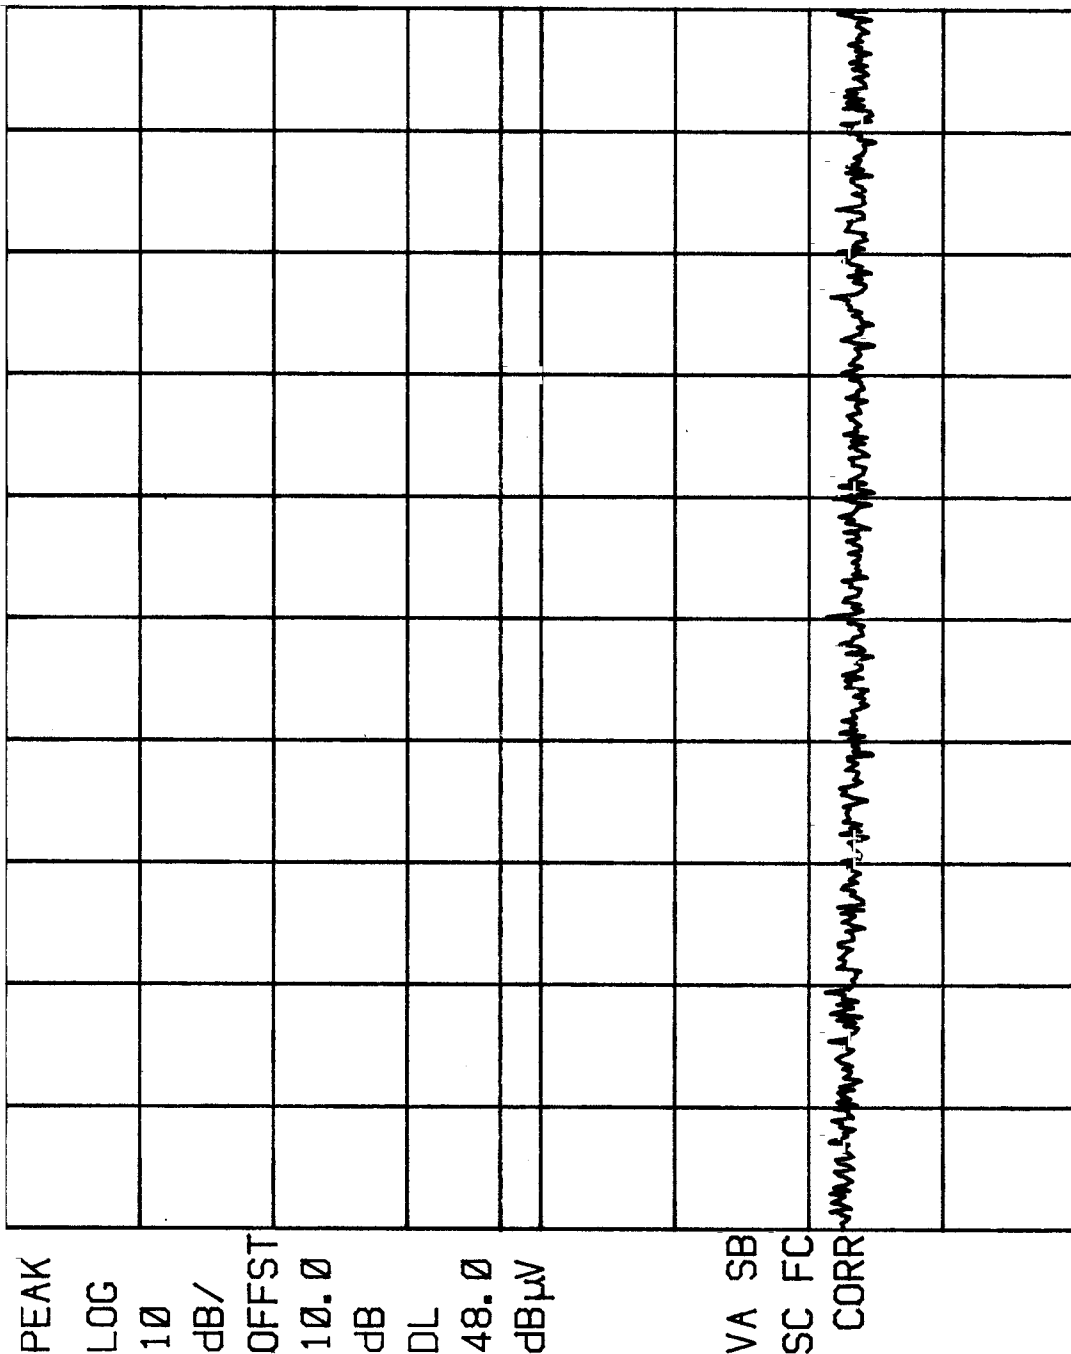


Retlif Testing Laboratories

Report No. R-8767

16:08:41 JAN 26, 2001

R-8767 DS720i FCC 15.207 CE TS LEAD-Neutral

REF 85.0 dBμV AT 10 dB

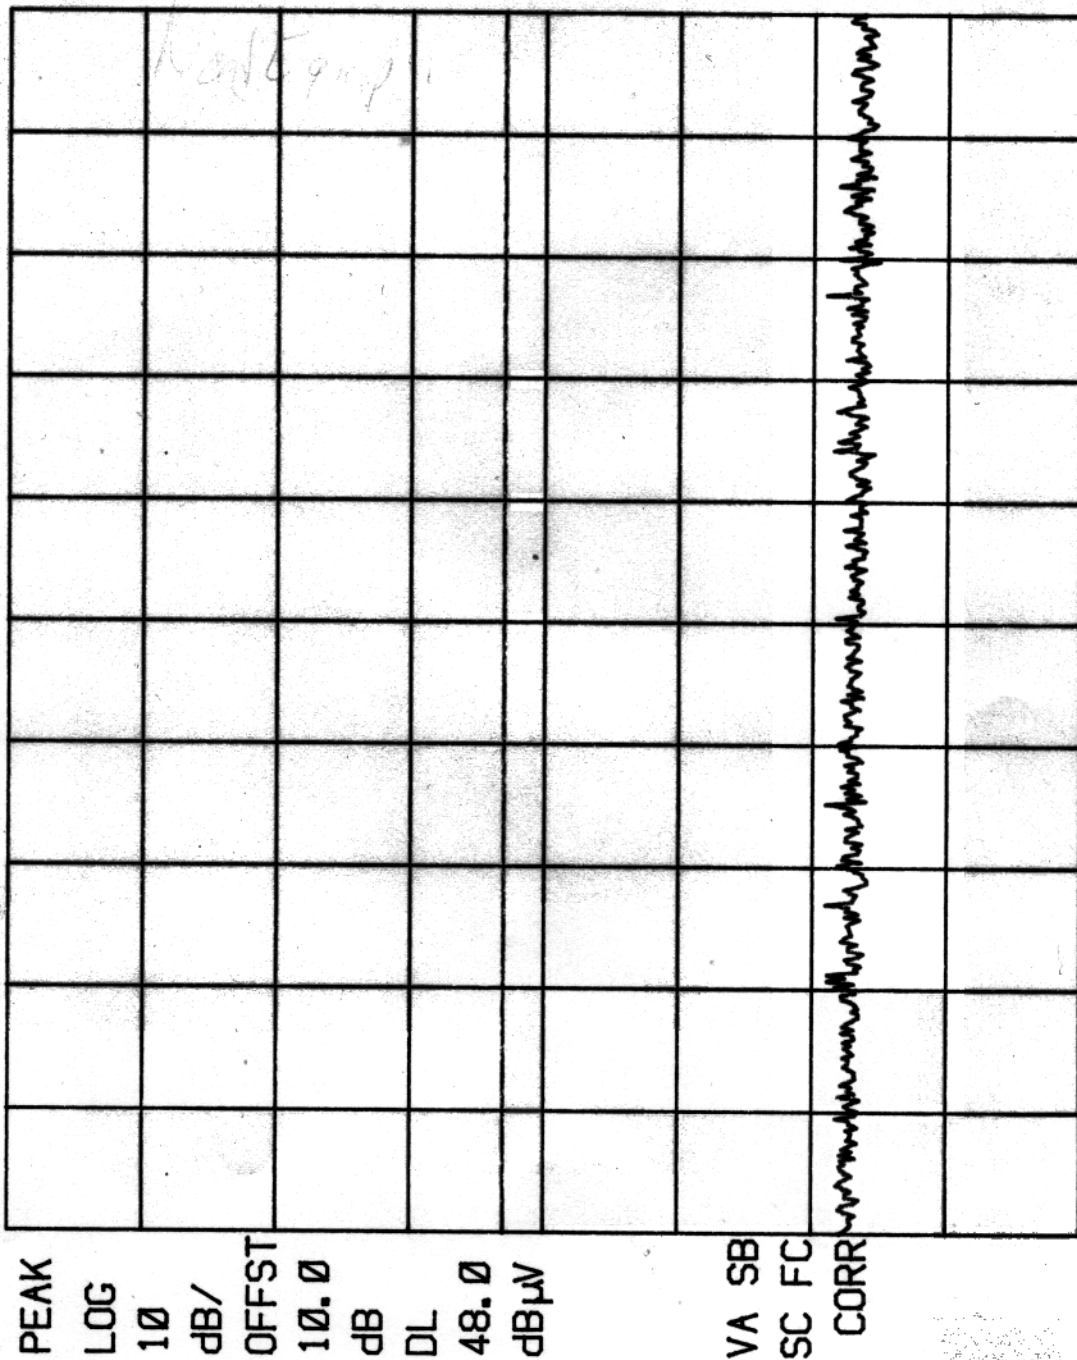

START 450 KHz #RES BW 9.0 KHz VBW 30 KHz STOP 30.00 MHz #SWP 20.0 sec

Customer:	Detection Systems
Test Sample:	10.525 GHz Field Disturbance Sensor
Model No.:	DS720i
Test Method:	FCC 15.207 Conducted Emissions 450 kHz to 30 MHz
Notes:	Lead Tested: Neutral Detector Function: Peak
Date:	January 26, 2001
Tech:	TS
Sheet:	2 of 2



Retlif Testing Laboratories

Report No. R-8767