




Test Engineer :	Chase	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

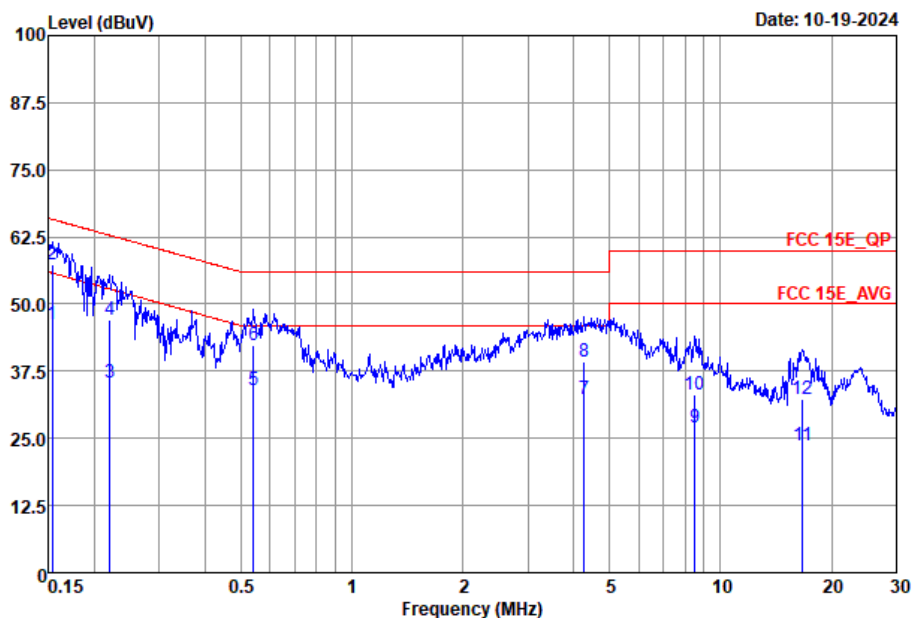

Site : C002-SZ
Condition : FCC 15E_QP LISN_2024-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.15	46.27	-9.51	55.78	26.00	10.11	10.16	Average
2 *	0.15	57.47	-8.31	65.78	37.20	10.11	10.16	QP
3	0.22	35.28	-17.51	52.79	15.09	10.03	10.16	Average
4	0.22	47.08	-15.71	62.79	26.89	10.03	10.16	QP
5	0.54	33.97	-12.03	46.00	13.80	9.96	10.21	Average
6	0.54	42.27	-13.73	56.00	22.10	9.96	10.21	QP
7	4.27	32.30	-13.70	46.00	12.20	9.86	10.24	Average
8	4.27	39.40	-16.60	56.00	19.30	9.86	10.24	QP
9	8.50	27.00	-23.00	50.00	6.99	9.74	10.27	Average
10	8.50	33.10	-26.90	60.00	13.09	9.74	10.27	QP
11	16.66	23.80	-26.20	50.00	3.60	9.70	10.50	Average
12	16.66	32.30	-27.70	60.00	12.10	9.70	10.50	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C Radiated Spurious Emission Test Data

Test Engineer :	Zhaohui Liang	Relative Humidity :	48~49%
		Temperature :	24-25°C

Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-1	5.15-5.25	1	802.11a	36	5180	6Mbps	-	-
Mode 2	U-NII-1	5.15-5.25	1	802.11a	44	5220	6Mbps	-	-
Mode 3	U-NII-1	5.15-5.25	1	802.11a	48	5240	6Mbps	-	-
Mode 4	U-NII-2A	5.25-5.35	1	802.11a	52	5280	6Mbps	-	-
Mode 5	U-NII-2A	5.25-5.35	1	802.11a	60	5300	6Mbps	-	-
Mode 6	U-NII-2A	5.25-5.35	1	802.11a	64	5320	6Mbps	-	-
Mode 7	U-NII-2C	5.47-5.725	1	802.11a	100	5500	6Mbps	-	-
Mode 8	U-NII-2C	5.47-5.725	1	802.11a	116	5580	6Mbps	-	-
Mode 9	U-NII-2C	5.47-5.725	1	802.11a	140	5700	6Mbps	-	-
Mode 10	U-NII-1	5.15-5.25	1	802.11n HT20	36	5180	MCS0	-	-
Mode 11	U-NII-1	5.15-5.25	1	802.11n HT20	44	5220	MCS0	-	-
Mode 12	U-NII-1	5.15-5.25	1	802.11n HT20	48	5240	MCS0	-	-
Mode 13	U-NII-2A	5.25-5.35	1	802.11n HT20	52	5280	MCS0	-	-
Mode 14	U-NII-2A	5.25-5.35	1	802.11n HT20	60	5300	MCS0	-	-
Mode 15	U-NII-2A	5.25-5.35	1	802.11n HT20	64	5320	MCS0	-	-
Mode 16	U-NII-2C	5.47-5.725	1	802.11n HT20	100	5500	MCS0	-	-
Mode 17	U-NII-2C	5.47-5.725	1	802.11n HT20	116	5580	MCS0	-	-
Mode 18	U-NII-2C	5.47-5.725	1	802.11n HT20	140	5700	MCS0	-	-
Mode 19	U-NII-1	5.15-5.25	1	802.11n HT40	38	5190	MCS0	-	-
Mode 20	U-NII-1	5.15-5.25	1	802.11n HT40	46	5230	MCS0	-	-
Mode 21	U-NII-2A	5.25-5.35	1	802.11n HT40	54	5270	MCS0	-	-
Mode 22	U-NII-2A	5.25-5.35	1	802.11n HT40	62	5310	MCS0	-	-
Mode 23	U-NII-2C	5.47-5.725	1	802.11n HT40	102	5510	MCS0	-	-
Mode 24	U-NII-2C	5.47-5.725	1	802.11n HT40	110	5550	MCS0	-	-
Mode 25	U-NII-2C	5.47-5.725	1	802.11n HT40	134	5670	MCS0	-	-
Mode 26	U-NII-1	5.15-5.25	1	802.11ax HE20	36	5180	MCS0	-	-
Mode 27	U-NII-1	5.15-5.25	1	802.11ax HE20	44	5220	MCS0	-	-
Mode 28	U-NII-1	5.15-5.25	1	802.11ax HE20	48	5240	MCS0	-	-
Mode 29	U-NII-2A	5.25-5.35	1	802.11ax HE20	52	5280	MCS0	-	-
Mode 30	U-NII-2A	5.25-5.35	1	802.11ax HE20	60	5300	MCS0	-	-
Mode 31	U-NII-2A	5.25-5.35	1	802.11ax HE20	64	5320	MCS0	-	-
Mode 32	U-NII-2C	5.47-5.725	1	802.11ax HE20	100	5500	MCS0	-	-
Mode 33	U-NII-2C	5.47-5.725	1	802.11ax HE20	116	5580	MCS0	-	-
Mode 34	U-NII-2C	5.47-5.725	1	802.11ax HE20	140	5700	MCS0	-	-
Mode 35	U-NII-1	5.15-5.25	1	802.11ax HE40	38	5190	MCS0	-	-
Mode 36	U-NII-1	5.15-5.25	1	802.11ax HE40	46	5230	MCS0	-	-
Mode 37	U-NII-2A	5.25-5.35	1	802.11ax HE40	54	5270	MCS0	-	-



Mode 38	U-NII-2A	5.25-5.35	1	802.11ax HE40	62	5310	MCS0	-	-
Mode 39	U-NII-2C	5.47-5.725	1	802.11ax HE40	102	5510	MCS0	-	-
Mode 40	U-NII-2C	5.47-5.725	1	802.11ax HE40	110	5550	MCS0	-	-
Mode 41	U-NII-2C	5.47-5.725	1	802.11ax HE40	134	5670	MCS0	-	-
Mode 42	U-NII-3	5.725-5.85	1	802.11a	149	5745	6Mbps	-	-
Mode 43	U-NII-3	5.725-5.85	1	802.11a	157	5785	6Mbps	-	-
Mode 44	U-NII-3	5.725-5.85	1	802.11a	165	5825	6Mbps	-	-
Mode 45	U-NII-3	5.725-5.85	1	802.11n HT20	149	5745	MCS0	-	-
Mode 46	U-NII-3	5.725-5.85	1	802.11n HT20	157	5785	MCS0	-	-
Mode 47	U-NII-3	5.725-5.85	1	802.11n HT20	165	5825	MCS0	-	-
Mode 48	U-NII-3	5.725-5.85	1	802.11n HT40	151	5755	MCS0	-	-
Mode 49	U-NII-3	5.725-5.85	1	802.11n HT40	159	5795	MCS0	-	-
Mode 50	U-NII-3	5.725-5.85	1	802.11ax HE20	149	5745	MCS0	-	-
Mode 51	U-NII-3	5.725-5.85	1	802.11ax HE20	157	5785	MCS0	-	-
Mode 52	U-NII-3	5.725-5.85	1	802.11ax HE20	165	5825	MCS0	-	-
Mode 53	U-NII-3	5.725-5.85	1	802.11ax HE40	151	5755	MCS0	-	-
Mode 54	U-NII-3	5.725-5.85	1	802.11ax HE40	159	5795	MCS0	-	-
Mode 55	U-NII-2A	5.25-5.35	1	WIFI Worse Band I.II.III LF-802.11a	64	5320	6Mbps	-	-
Mode 56	U-NII-3	5.725-5.85	1	WIFI Worse Band IV LF-802.11ax HE20	149	5745	MCS0	-	-
Mode 57	U-NII-2A	5.25-5.35	1	Sample 2- WIFI Worse LF-802.11a	64	5320	6Mbps	-	-
Mode 58	U-NII-2C	5.47-5.725	1	802.11a	116	5580	6Mbps	-	-
Mode 59	U-NII-2C	5.47-5.725	1	802.11n HT20	116	5580	MCS0	-	-
Mode 60	U-NII-2C	5.47-5.725	1	802.11ax HE20	116	5580	MCS0	-	-
Mode 61	U-NII-2C	5.47-5.725	1	802.11a	104	5520	6Mbps	-	-
Mode 62	U-NII-2C	5.47-5.725	1	802.11a	136	5680	6Mbps	-	-
Mode 63	U-NII-2C	5.47-5.725	1	802.11n HT20	136	5680	MCS0	-	-
Mode 64	U-NII-2C	5.47-5.725	1	802.11ax HE20	104	5520	MCS0	-	-
Mode 65	U-NII-2C	5.47-5.725	1	802.11ax HE20	136	5680	MCS0	-	-



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	36	5149.85	50.89	54.00	-3.11	H	AVERAGE	Pass	Band Edge
1	802.11a	36	10360.00	48.09	68.30	-20.21	H	Peak	Pass	Harmonic
2	802.11a	44	-	-	-	-	-	-	-	Band Edge
2	802.11a	44	10440.00	49.68	68.30	-18.62	V	Peak	Pass	Harmonic
3	802.11a	48	-	-	-	-	-	-	-	Band Edge
3	802.11a	48	10480.00	49.33	68.30	-18.97	V	Peak	Pass	Harmonic
4	802.11a	52	-	-	-	-	-	-	-	Band Edge
4	802.11a	52	10520.00	-49.68	68.30	-18.62	V	Peak	Pass	Harmonic
5	802.11a	60	-	-	-	-	-	-	-	Band Edge
5	802.11a	60	15900.00	47.86	74.00	-26.14	V	Peak	Pass	Harmonic
6	802.11a	64	5350.00	53.58	54.00	-0.42	H	AVERAGE	Pass	Band Edge
6	802.11a	64	10640.00	47.81	74.00	-26.19	V	Peak	Pass	Harmonic
7	802.11a	100	5462.59	62.84	68.30	-5.46	H	PEAK	Pass	Band Edge
7	802.11a	100	16500.00	48.70	68.30	-19.60	H	Peak	Pass	Harmonic
8	802.11a	116	-	-	-	-	-	-	-	Band Edge
8	802.11a	116	16740.00	48.96	68.30	-19.34	V	Peak	Pass	Harmonic
9	802.11a	140	5730.78	61.11	68.30	-7.19	H	PEAK	Pass	Band Edge
9	802.11a	140	17100.00	48.95	68.30	-19.35	V	Peak	Pass	Harmonic
10	802.11n HT20	36	5149.99	51.94	54.00	-2.06	H	AVERAGE	Pass	Band Edge
10	802.11n HT20	36	10360.00	49.00	68.30	-19.30	H	Peak	Pass	Harmonic
11	802.11n HT20	44	-	-	-	-	-	-	-	Band Edge
11	802.11n HT20	44	10440.00	48.66	68.30	-19.64	V	Peak	Pass	Harmonic
12	802.11n HT20	48	-	-	-	-	-	-	-	Band Edge
12	802.11n HT20	48	10480.00	48.48	68.30	-19.82	V	Peak	Pass	Harmonic
13	802.11n HT20	52	-	-	-	-	-	-	-	Band Edge
13	802.11n HT20	52	10520.00	49.01	68.30	-19.29	H	Peak	Pass	Harmonic
14	802.11n HT20	60	-	-	-	-	-	-	-	Band Edge
14	802.11n HT20	60	10600.00	47.97	74.00	-26.03	V	Peak	Pass	Harmonic
15	802.11n HT20	64	5350.03	53.43	54.00	-0.57	H	AVERAGE	Pass	Band Edge
15	802.11n HT20	64	10640.00	47.98	74.00	-26.02	V	Peak	Pass	Harmonic
16	802.11n HT20	100	5469.93	65.85	68.30	-2.45	H	PEAK	Pass	Band Edge
16	802.11n HT20	100	16500.00	48.63	68.30	-19.67	H	Peak	Pass	Harmonic
17	802.11n HT20	116	-	-	-	-	-	-	-	Band Edge
17	802.11n HT20	116	16740.00	49.67	68.30	-18.63	H	Peak	Pass	Harmonic
18	802.11n HT20	140	5729.09	61.17	68.30	-7.13	V	PEAK	Pass	Band Edge
18	802.11n HT20	140	17100.00	47.73	68.30	-20.57	H	Peak	Pass	Harmonic
19	802.11n HT40	38	5149.97	53.17	54.00	-0.83	H	AVERAGE	Pass	Band Edge
19	802.11n HT40	38	10380.00	49.30	68.30	-19.00	V	Peak	Pass	Harmonic
20	802.11n HT40	46	5149.39	45.22	54.00	-8.78	H	AVERAGE	Pass	Band Edge
20	802.11n HT40	46	10460.00	48.37	68.30	-19.93	H	Peak	Pass	Harmonic
21	802.11n HT40	54	5350.29	43.18	54.00	-10.82	H	AVERAGE	Pass	Band Edge
21	802.11n HT40	54	10540.00	48.61	68.30	-19.69	H	Peak	Pass	Harmonic
22	802.11n HT40	62	5350.01	52.21	54.00	-1.79	H	AVERAGE	Pass	Band Edge
22	802.11n HT40	62	10620.00	49.09	74.00	-24.91	V	Peak	Pass	Harmonic







23	802.11n HT40	102	5464.18	65.02	68.30	-3.28	H	PEAK	Pass	Band Edge
23	802.11n HT40	102	16530.00	48.56	68.30	-19.74	H	Peak	Pass	Harmonic
24	802.11n HT40	110	5469.50	59.03	68.30	-9.27	H	PEAK	Pass	Band Edge
24	802.11n HT40	110	16650.00	49.05	68.30	-19.25	H	Peak	Pass	Harmonic
25	802.11n HT40	134	5725.44	66.53	68.30	-1.77	H	PEAK	Pass	Band Edge
25	802.11n HT40	134	17010.00	47.64	68.30	-20.66	V	Peak	Pass	Harmonic
26	802.11ax HE20	36	5149.99	53.30	54.00	-0.70	H	AVERAGE	Pass	Band Edge
26	802.11ax HE20	36	10360.00	48.83	68.30	-19.47	V	Peak	Pass	Harmonic
27	802.11ax HE20	44	-	-	-	-	-	-	-	Band Edge
27	802.11ax HE20	44	10440.00	48.42	68.30	-19.88	H	Peak	Pass	Harmonic
28	802.11ax HE20	48	-	-	-	-	-	-	-	Band Edge
28	802.11ax HE20	48	10480.00	47.90	68.30	-20.40	H	Peak	Pass	Harmonic
29	802.11ax HE20	52	-	-	-	-	-	-	-	Band Edge
29	802.11ax HE20	52	10520.00	48.91	68.30	-19.39	V	Peak	Pass	Harmonic
30	802.11ax HE20	60	-	-	-	-	-	-	-	Band Edge
30	802.11ax HE20	60	10600.00	48.74	74.00	-25.26	V	Peak	Pass	Harmonic
31	802.11ax HE20	64	5350.74	49.13	54.00	-4.87	H	AVERAGE	Pass	Band Edge
31	802.11ax HE20	64	10640.00	48.98	74.00	-25.02	H	Peak	Pass	Harmonic
32	802.11ax HE20	100	5463.48	65.38	68.30	-2.92	H	PEAK	Pass	Band Edge
32	802.11ax HE20	100	16500.00	48.18	68.30	-20.12	V	Peak	Pass	Harmonic
33	802.11ax HE20	116	-	-	-	-	-	-	-	Band Edge
33	802.11ax HE20	116	16740.00	47.50	68.30	-20.80	V	Peak	Pass	Harmonic
34	802.11ax HE20	140	5725.65	66.67	68.30	-1.63	H	PEAK	Pass	Band Edge
34	802.11ax HE20	140	17100.00	47.06	68.30	-21.24	H	Peak	Pass	Harmonic
35	802.11ax HE40	38	5149.06	51.72	54.00	-2.28	H	AVERAGE	Pass	Band Edge
35	802.11ax HE40	38	10380.00	48.29	68.30	-20.01	V	Peak	Pass	Harmonic
36	802.11ax HE40	46	5149.64	50.08	54.00	-3.92	H	AVERAGE	Pass	Band Edge
36	802.11ax HE40	46	10460.00	48.25	68.30	-20.05	H	Peak	Pass	Harmonic
37	802.11ax HE40	54	5350.09	48.49	54.00	-5.51	H	AVERAGE	Pass	Band Edge
37	802.11ax HE40	54	10540.00	47.78	68.30	-20.52	H	Peak	Pass	Harmonic
38	802.11ax HE40	62	5350.01	47.50	54.00	-6.50	H	AVERAGE	Pass	Band Edge
38	802.11ax HE40	62	10620.00	48.70	74.00	-25.30	H	Peak	Pass	Harmonic
39	802.11ax HE40	102	5468.80	65.78	68.30	-2.52	H	PEAK	Pass	Band Edge
39	802.11ax HE40	102	16530.00	47.96	68.30	-20.34	H	Peak	Pass	Harmonic
40	802.11ax HE40	110	5465.10	58.49	68.30	-9.81	H	PEAK	Pass	Band Edge
40	802.11ax HE40	110	16650.00	47.51	68.30	-20.79	V	Peak	Pass	Harmonic
41	802.11ax HE40	134	5725.62	66.52	68.30	-1.78	H	PEAK	Pass	Band Edge
41	802.11ax HE40	134	17010.00	47.96	68.30	-20.34	V	Peak	Pass	Harmonic
42	802.11a	149	5649.59	53.72	68.30	-14.58	H	PEAK	Pass	Band Edge
42	802.11a	149	17235.00	47.56	68.30	-20.74	V	Peak	Pass	Harmonic
43	802.11a	157	-	-	-	-	-	-	-	Band Edge
43	802.11a	157	17355.00	47.87	68.30	-20.43	H	Peak	Pass	Harmonic
44	802.11a	165	5932.00	53.27	68.30	-15.03	V	PEAK	Pass	Band Edge
44	802.11a	165	17475.00	47.98	68.30	-20.32	V	Peak	Pass	Harmonic
45	802.11n HT20	149	5616.82	53.53	68.30	-14.77	V	PEAK	Pass	Band Edge
45	802.11n HT20	149	17235.00	47.89	68.30	-20.41	H	Peak	Pass	Harmonic







46	802.11n HT20	157	-	-	-	-	-	-	-	Band Edge
46	802.11n HT20	157	17355.00	48.00	68.30	-20.30	H	Peak	Pass	Harmonic
47	802.11n HT20	165	5948.50	53.46	68.30	-14.84	H	PEAK	Pass	Band Edge
47	802.11n HT20	165	17475.00	47.05	68.30	-21.25	V	Peak	Pass	Harmonic
48	802.11n HT40	151	5608.06	53.65	68.30	-14.65	H	PEAK	Pass	Band Edge
48	802.11n HT40	151	17265.00	47.91	68.30	-20.39	V	Peak	Pass	Harmonic
49	802.11n HT40	159	5630.62	53.14	68.30	-15.16	H	PEAK	Pass	Band Edge
49	802.11n HT40	159	17385.00	48.21	68.30	-20.09	V	Peak	Pass	Harmonic
50	802.11ax HE20	149	5649.74	53.86	68.30	-14.44	H	PEAK	Pass	Band Edge
50	802.11ax HE20	149	17235.00	47.74	68.30	-20.56	H	Peak	Pass	Harmonic
51	802.11ax HE20	157	-	-	-	-	-	-	-	Band Edge
51	802.11ax HE20	157	17355.00	47.63	68.30	-20.67	H	Peak	Pass	Harmonic
52	802.11ax HE20	165	5947.50	53.28	68.30	-15.02	H	PEAK	Pass	Band Edge
52	802.11ax HE20	165	17475.00	47.94	68.30	-20.36	V	Peak	Pass	Harmonic
53	802.11ax HE40	151	5606.05	53.68	68.30	-14.62	H	PEAK	Pass	Band Edge
53	802.11ax HE40	151	17265.00	48.51	68.30	-19.79	V	Peak	Pass	Harmonic
54	802.11ax HE40	159	5937.60	53.75	68.30	-14.55	V	PEAK	Pass	Band Edge
54	802.11ax HE40	159	17385.00	48.03	68.30	-20.27	V	Peak	Pass	Harmonic
55	LF-802.11a	64	359.80	32.31	46.00	-13.69	H	Peak	Pass	LF
56	LF-802.11ax HE20	149	359.80	32.54	46.00	-13.46	H	Peak	Pass	LF
57	Sample 2-LF-802.11a	64	359.80	32.41	46.00	-13.59	H	Peak	Pass	LF
58	802.11a	116	5457.25	42.42	54.00	-11.58	H	AVERAGE	Pass	Band Edge
58	802.11a	116	-	-	-	-	-	-	-	Harmonic
59	802.11n HT20	116	5457.30	41.88	54.00	-12.12	V	AVERAGE	Pass	Band Edge
59	802.11n HT20	116	-	-	-	-	-	-	-	Harmonic
60	802.11ax HE20	116	5373.35	42.43	54.00	-11.57	H	AVERAGE	Pass	Band Edge
60	802.11ax HE20	116	-	-	-	-	-	-	-	Harmonic
61	802.11a	104	5464.84	63.08	68.30	-5.22	H	PEAK	Pass	Band Edge
61	802.11a	104	-	-	-	-	-	-	-	Harmonic
62	802.11a	136	5725.94	63.87	68.30	-4.43	H	PEAK	Pass	Band Edge
62	802.11a	136	-	-	-	-	-	-	-	Harmonic
63	802.11n HT20	136	5729.35	61.71	68.30	-6.59	H	PEAK	Pass	Band Edge
63	802.11n HT20	136	-	-	-	-	-	-	-	Harmonic
64	802.11ax HE20	104	5469.26	62.25	68.30	-6.05	H	PEAK	Pass	Band Edge
64	802.11ax HE20	104	-	-	-	-	-	-	-	Harmonic
65	802.11ax HE20	136	5727.65	62.28	68.30	-6.02	H	PEAK	Pass	Band Edge
65	802.11ax HE20	136	-	-	-	-	-	-	-	Harmonic

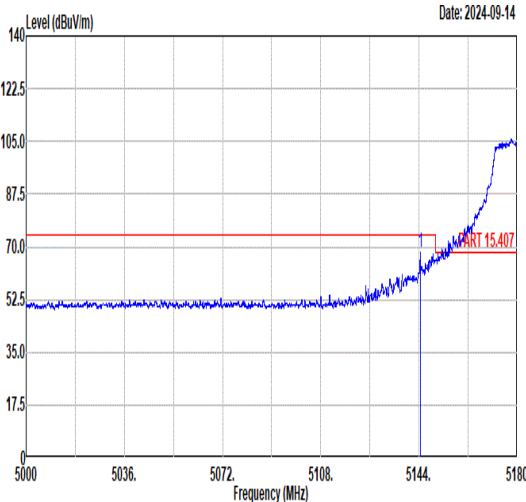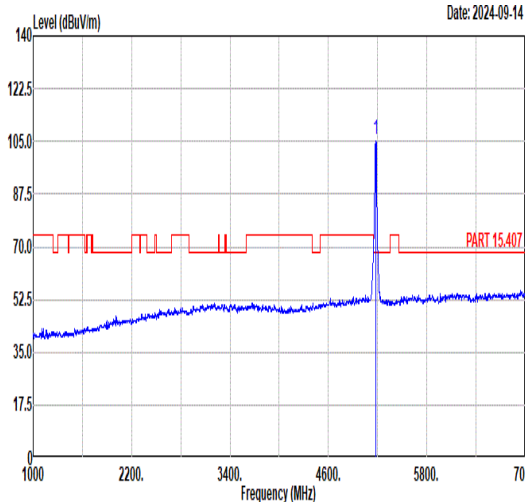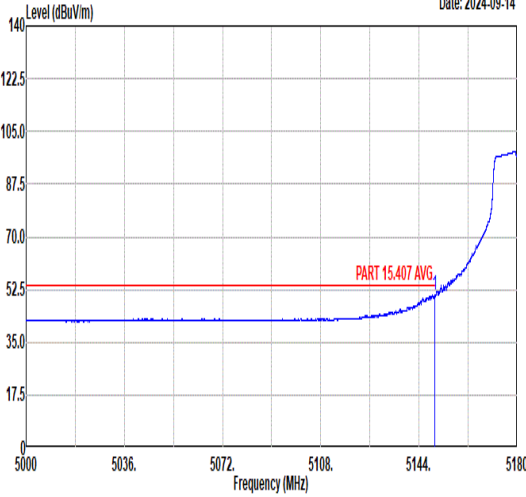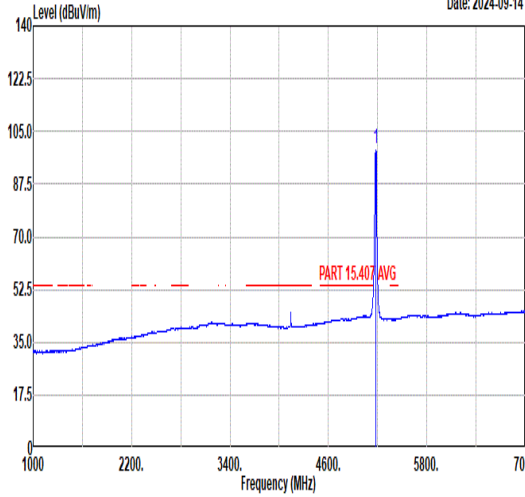

Mode	1																																																																																										
	Band Edge																																																																																										
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																										
ANT	1																																																																																										
Pol.	Horizontal						Fundamental																																																																																				
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5144.47</td><td>68.21</td><td>74.00</td><td>-5.79</td><td>54.02</td><td>34.87</td><td>11.09</td><td>31.77</td><td>368</td><td>75</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5144.47	68.21	74.00	-5.79	54.02	34.87	11.09	31.77	368	75	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>105.90</td><td>-----</td><td>-----</td><td>91.79</td><td>34.86</td><td>11.07</td><td>31.82</td><td>368</td><td>75</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	105.90	-----	-----	91.79	34.86	11.07	31.82	368	75
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5144.47	68.21	74.00	-5.79	54.02	34.87	11.09	31.77	368	75	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5180.00	105.90	-----	-----	91.79	34.86	11.07	31.82	368	75	PEAK																																																																																
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.85</td><td>50.89</td><td>54.00</td><td>-3.11</td><td>36.71</td><td>34.87</td><td>11.09</td><td>31.78</td><td>368</td><td>75</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.85	50.89	54.00	-3.11	36.71	34.87	11.09	31.78	368	75	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>99.36</td><td>-----</td><td>-----</td><td>85.25</td><td>34.86</td><td>11.07</td><td>31.82</td><td>368</td><td>75</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	99.36	-----	-----	85.25	34.86	11.07	31.82	368	75
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5149.85	50.89	54.00	-3.11	36.71	34.87	11.09	31.78	368	75	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5180.00	99.36	-----	-----	85.25	34.86	11.07	31.82	368	75	AVERAGE																																																																																

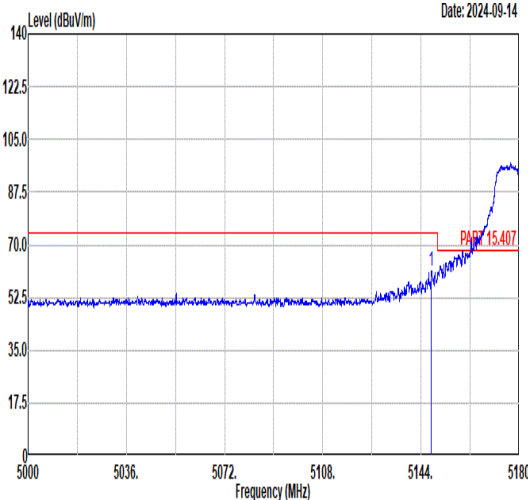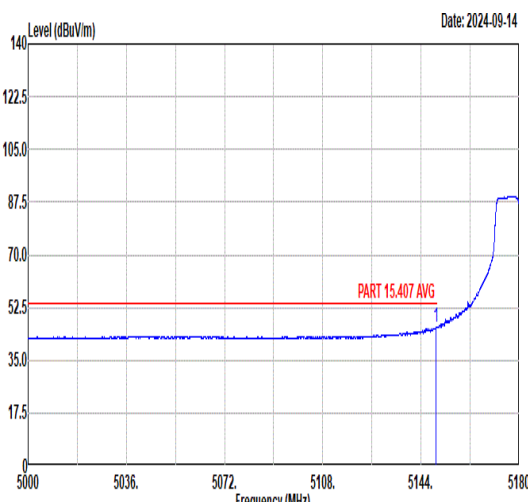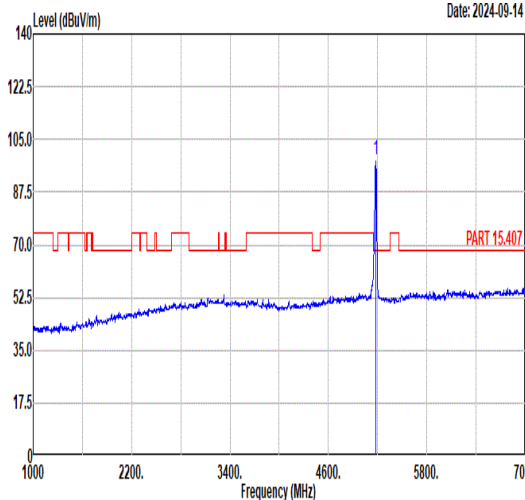
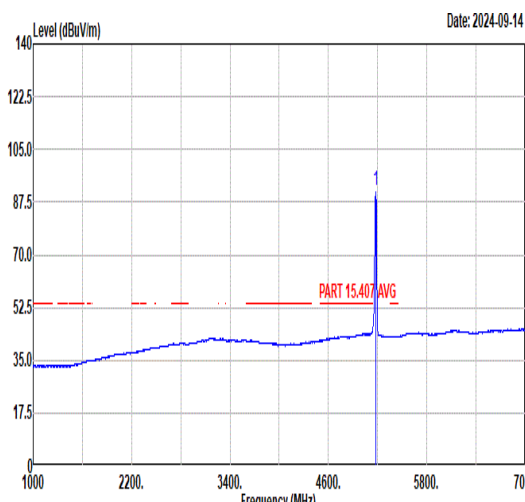


Mode	1																																																	
	Band Edge																																																	
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																	
ANT	1																																																	
Pol.	Vertical																																																	
Peak	Fundamental																																																	
	Date: 2024-09-14																																																	
																																																		
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5147.71</td><td>61.44</td><td>74.00</td><td>-12.56</td><td>47.26</td><td>34.87</td><td>11.09</td><td>31.78</td><td>400</td><td>164</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5147.71	61.44	74.00	-12.56	47.26	34.87	11.09	31.78	400	164	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																										
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																									
1	5147.71	61.44	74.00	-12.56	47.26	34.87	11.09	31.78	400	164	PEAK																																							
Avg	Date: 2024-09-14																																																	
																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.51</td><td>46.02</td><td>54.00</td><td>-7.98</td><td>31.84</td><td>34.87</td><td>11.09</td><td>31.78</td><td>400</td><td>164</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.51	46.02	54.00	-7.98	31.84	34.87	11.09	31.78	400	164
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																										
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																									
1	5149.51	46.02	54.00	-7.98	31.84	34.87	11.09	31.78	400	164	AVERAGE																																							
Peak	Date: 2024-09-14																																																	
																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>98.38</td><td>-----</td><td>-----</td><td>84.25</td><td>34.87</td><td>11.07</td><td>31.81</td><td>400</td><td>164</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	98.38	-----	-----	84.25	34.87	11.07	31.81	400	164
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																										
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																									
1	5180.00	98.38	-----	-----	84.25	34.87	11.07	31.81	400	164	PEAK																																							
Avg	Date: 2024-09-14																																																	
																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>91.17</td><td>-----</td><td>-----</td><td>77.04</td><td>34.87</td><td>11.07</td><td>31.81</td><td>400</td><td>164</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	91.17	-----	-----	77.04	34.87	11.07	31.81	400	164
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																										
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																									
1	5180.00	91.17	-----	-----	77.04	34.87	11.07	31.81	400	164	AVERAGE																																							





Mode	1																																																														
	Harmonic																																																														
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																														
ANT	1																																																														
Pol.	Horizontal																																																														
Peak Avg	Level (dBuV/m) Date: 2024-09-18 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>10360.00</td><td>48.09</td><td>68.30</td><td>-20.21</td><td>45.27</td><td>39.44</td><td>14.15</td><td>50.77</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>47.00</td><td>74.00</td><td>-27.00</td><td>39.76</td><td>41.82</td><td>16.85</td><td>51.43</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	48.09	68.30	-20.21	45.27	39.44	14.15	50.77	---	---	Peak	2	15540.00	47.00	74.00	-27.00	39.76	41.82	16.85	51.43	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																							
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																					
1	10360.00	48.09	68.30	-20.21	45.27	39.44	14.15	50.77	---	---	Peak																																																				
2	15540.00	47.00	74.00	-27.00	39.76	41.82	16.85	51.43	---	---	Peak																																																				
Level (dBuV/m) Date: 2024-09-18 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>10360.00</td><td>48.03</td><td>68.30</td><td>-20.27</td><td>45.21</td><td>39.44</td><td>14.15</td><td>50.77</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>47.26</td><td>74.00</td><td>-26.74</td><td>40.02</td><td>41.82</td><td>16.85</td><td>51.43</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	48.03	68.30	-20.27	45.21	39.44	14.15	50.77	---	---	Peak	2	15540.00	47.26	74.00	-26.74	40.02	41.82	16.85	51.43	---	---	Peak	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																						
1	10360.00	48.03	68.30	-20.27	45.21	39.44	14.15	50.77	---	---	Peak																																																				
2	15540.00	47.26	74.00	-26.74	40.02	41.82	16.85	51.43	---	---	Peak																																																				

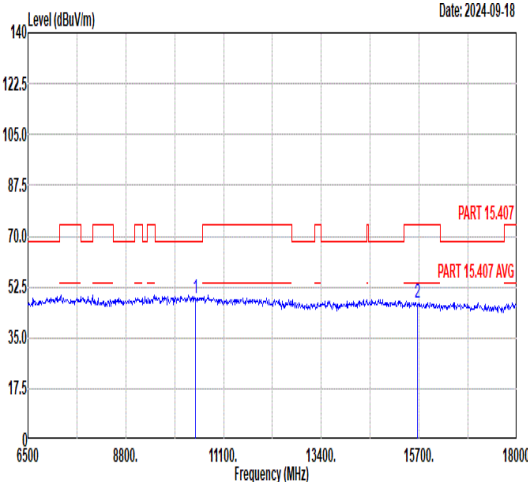
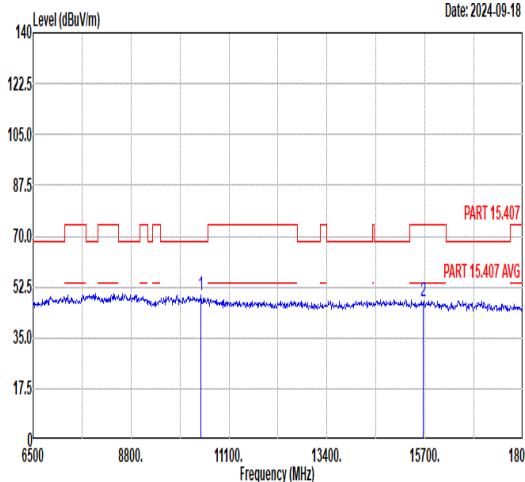


Mode	2																																																																						
	Harmonic																																																																						
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																						
ANT	1																																																																						
Pol.	Horizontal						Vertical																																																																
Peak Avg																																																																							
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10440.00</td><td>48.74</td><td>68.30</td><td>-19.56</td><td>45.85</td><td>39.48</td><td>14.20</td><td>50.79</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>46.89</td><td>74.00</td><td>-27.11</td><td>39.58</td><td>41.90</td><td>16.94</td><td>51.53</td><td>---</td><td>---</td><td>Peak</td></tr></table>														Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10440.00	48.74	68.30	-19.56	45.85	39.48	14.20	50.79	---	---	Peak	2	15660.00	46.89	74.00	-27.11	39.58	41.90	16.94	51.53	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																														
1	10440.00	48.74	68.30	-19.56	45.85	39.48	14.20	50.79	---	---	Peak																																																												
2	15660.00	46.89	74.00	-27.11	39.58	41.90	16.94	51.53	---	---	Peak																																																												
<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10440.00</td><td>49.68</td><td>68.30</td><td>-18.62</td><td>46.79</td><td>39.48</td><td>14.20</td><td>50.79</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>47.31</td><td>74.00</td><td>-26.69</td><td>40.00</td><td>41.90</td><td>16.94</td><td>51.53</td><td>---</td><td>---</td><td>Peak</td></tr></table>														Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10440.00	49.68	68.30	-18.62	46.79	39.48	14.20	50.79	---	---	Peak	2	15660.00	47.31	74.00	-26.69	40.00	41.90	16.94	51.53	---	---	Peak	
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																														
1	10440.00	49.68	68.30	-18.62	46.79	39.48	14.20	50.79	---	---	Peak																																																												
2	15660.00	47.31	74.00	-26.69	40.00	41.90	16.94	51.53	---	---	Peak																																																												

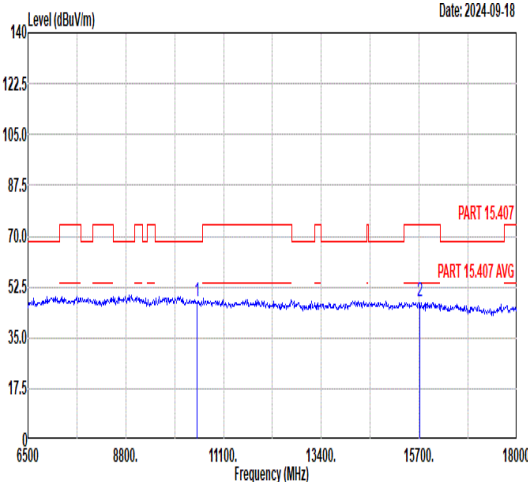
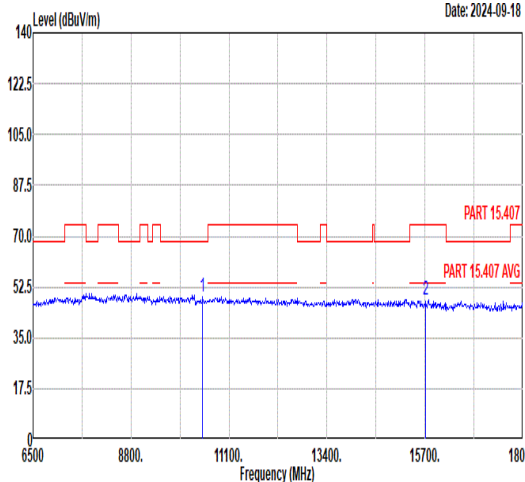


Mode	3																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																																																																	
ANT	1																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10480.00</td><td>47.72</td><td>68.30</td><td>-20.58</td><td>44.80</td><td>39.49</td><td>14.23</td><td>50.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15720.00</td><td>47.79</td><td>74.00</td><td>-26.21</td><td>40.45</td><td>41.93</td><td>16.99</td><td>51.58</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10480.00	47.72	68.30	-20.58	44.80	39.49	14.23	50.80	---	---	Peak	2	15720.00	47.79	74.00	-26.21	40.45	41.93	16.99	51.58	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10480.00</td><td>49.33</td><td>68.30</td><td>-18.97</td><td>46.41</td><td>39.49</td><td>14.23</td><td>50.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15720.00</td><td>48.21</td><td>74.00</td><td>-25.79</td><td>40.87</td><td>41.93</td><td>16.99</td><td>51.58</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10480.00	49.33	68.30	-18.97	46.41	39.49	14.23	50.80	---	---	Peak	2	15720.00	48.21	74.00	-25.79	40.87	41.93	16.99	51.58	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10480.00	47.72	68.30	-20.58	44.80	39.49	14.23	50.80	---	---	Peak																																																																																																																							
2	15720.00	47.79	74.00	-26.21	40.45	41.93	16.99	51.58	---	---	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10480.00	49.33	68.30	-18.97	46.41	39.49	14.23	50.80	---	---	Peak																																																																																																																							
2	15720.00	48.21	74.00	-25.79	40.87	41.93	16.99	51.58	---	---	Peak																																																																																																																							

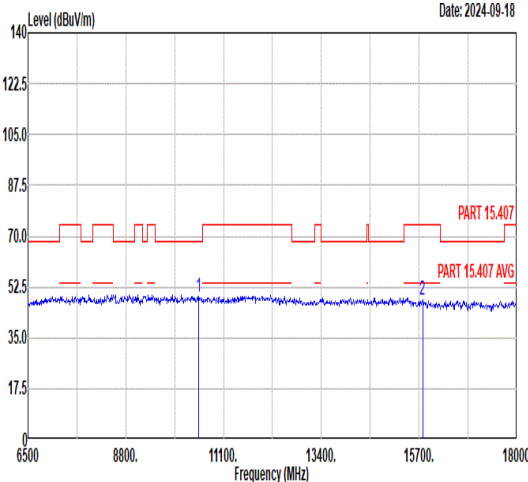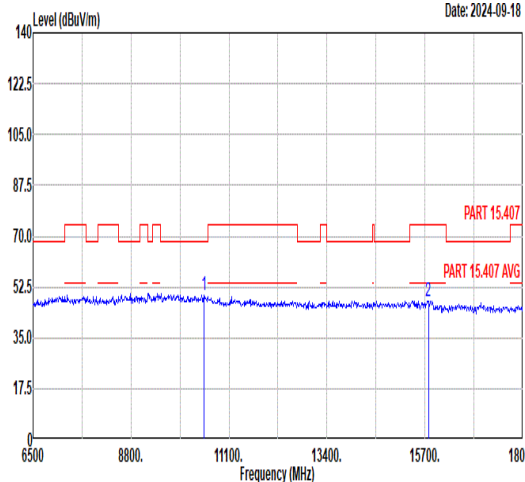

Mode	4																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-2A_5.25-5.35_802.11a_CH52_5280MHz																																																																																																																																	
ANT	1																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10520.00</td><td>49.02</td><td>68.30</td><td>-19.28</td><td>46.07</td><td>39.50</td><td>14.25</td><td>50.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15780.00</td><td>47.82</td><td>74.00</td><td>-26.18</td><td>40.44</td><td>41.97</td><td>17.04</td><td>51.63</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10520.00	49.02	68.30	-19.28	46.07	39.50	14.25	50.80	---	---	Peak	2	15780.00	47.82	74.00	-26.18	40.44	41.97	17.04	51.63	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10520.00</td><td>49.68</td><td>68.30</td><td>-18.62</td><td>46.73</td><td>39.50</td><td>14.25</td><td>50.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15780.00</td><td>47.51</td><td>74.00</td><td>-26.49</td><td>40.13</td><td>41.97</td><td>17.04</td><td>51.63</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10520.00	49.68	68.30	-18.62	46.73	39.50	14.25	50.80	---	---	Peak	2	15780.00	47.51	74.00	-26.49	40.13	41.97	17.04	51.63	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10520.00	49.02	68.30	-19.28	46.07	39.50	14.25	50.80	---	---	Peak																																																																																																																							
2	15780.00	47.82	74.00	-26.18	40.44	41.97	17.04	51.63	---	---	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10520.00	49.68	68.30	-18.62	46.73	39.50	14.25	50.80	---	---	Peak																																																																																																																							
2	15780.00	47.51	74.00	-26.49	40.13	41.97	17.04	51.63	---	---	Peak																																																																																																																							

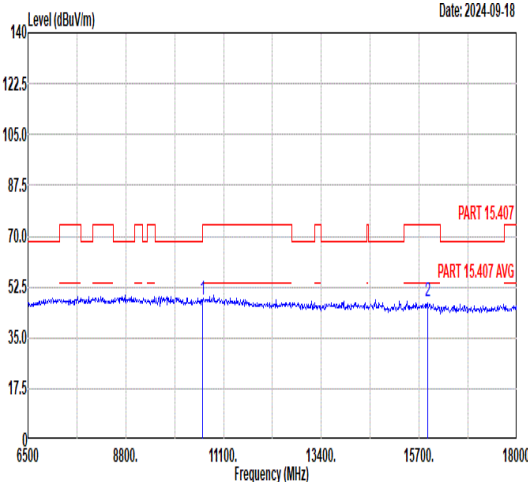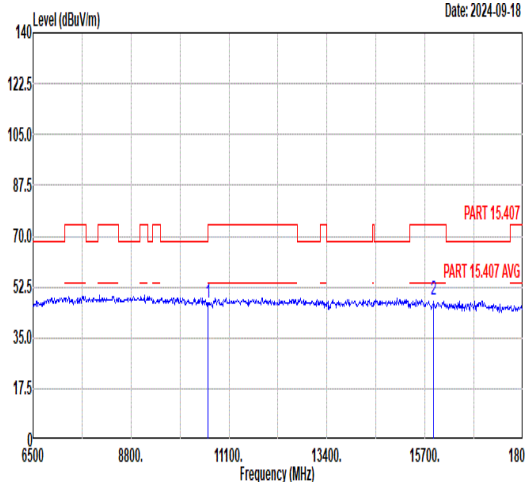

Mode	5																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz																																																																																																																																	
ANT	1																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 10600.00</td><td>47.84</td><td>74.00</td><td>-26.16</td><td>44.86</td><td>39.48</td><td>14.30</td><td>50.80</td><td>---</td><td>---</td><td>Peak</td><td></td></tr><tr><td>2 15900.00</td><td>47.46</td><td>74.00</td><td>-26.54</td><td>40.00</td><td>42.04</td><td>17.14</td><td>51.72</td><td>---</td><td>---</td><td>Peak</td><td></td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1 10600.00	47.84	74.00	-26.16	44.86	39.48	14.30	50.80	---	---	Peak		2 15900.00	47.46	74.00	-26.54	40.00	42.04	17.14	51.72	---	---	Peak		<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 10600.00</td><td>47.28</td><td>74.00</td><td>-26.72</td><td>44.30</td><td>39.48</td><td>14.30</td><td>50.80</td><td>---</td><td>---</td><td>Peak</td><td></td></tr><tr><td>2 15900.00</td><td>47.86</td><td>74.00</td><td>-26.14</td><td>40.40</td><td>42.04</td><td>17.14</td><td>51.72</td><td>---</td><td>---</td><td>Peak</td><td></td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1 10600.00	47.28	74.00	-26.72	44.30	39.48	14.30	50.80	---	---	Peak		2 15900.00	47.86	74.00	-26.14	40.40	42.04	17.14	51.72	---	---	Peak	
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1 10600.00	47.84	74.00	-26.16	44.86	39.48	14.30	50.80	---	---	Peak																																																																																																																								
2 15900.00	47.46	74.00	-26.54	40.00	42.04	17.14	51.72	---	---	Peak																																																																																																																								
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1 10600.00	47.28	74.00	-26.72	44.30	39.48	14.30	50.80	---	---	Peak																																																																																																																								
2 15900.00	47.86	74.00	-26.14	40.40	42.04	17.14	51.72	---	---	Peak																																																																																																																								





Mode	6																																																																													
	Band Edge																																																																													
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																													
ANT	1																																																																													
Pol.	Horizontal	Fundamental																																																																												
Peak	Level (dBuV/m) Date: 2024-09-14 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5351.30</td><td>71.61</td><td>74.00</td><td>-2.39</td><td>57.87</td><td>34.83</td><td>10.94</td><td>32.03</td><td>324</td><td>71 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5351.30	71.61	74.00	-2.39	57.87	34.83	10.94	32.03	324	71 PEAK	Level (dBuV/m) Date: 2024-09-14 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5320.00</td><td>107.11</td><td>-----</td><td>-----</td><td>93.29</td><td>34.84</td><td>10.97</td><td>31.99</td><td>324</td><td>71 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5320.00	107.11	-----	-----	93.29	34.84	10.97	31.99	324	71 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5351.30	71.61	74.00	-2.39	57.87	34.83	10.94	32.03	324	71 PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5320.00	107.11	-----	-----	93.29	34.84	10.97	31.99	324	71 PEAK																																																																					
Avg	Level (dBuV/m) Date: 2024-09-14 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5350.00</td><td>53.58</td><td>54.00</td><td>-0.42</td><td>39.84</td><td>34.83</td><td>10.94</td><td>32.03</td><td>324</td><td>71 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5350.00	53.58	54.00	-0.42	39.84	34.83	10.94	32.03	324	71 AVERAGE	Level (dBuV/m) Date: 2024-09-14 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5320.00</td><td>99.64</td><td>-----</td><td>-----</td><td>85.82</td><td>34.84</td><td>10.97</td><td>31.99</td><td>324</td><td>71 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5320.00	99.64	-----	-----	85.82	34.84	10.97	31.99	324	71 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5350.00	53.58	54.00	-0.42	39.84	34.83	10.94	32.03	324	71 AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5320.00	99.64	-----	-----	85.82	34.84	10.97	31.99	324	71 AVERAGE																																																																					







Mode	6																																																																																									
	Band Edge																																																																																									
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																									
ANT	1																																																																																									
Pol.	Vertical					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2024-09-14 PART 15.407 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.17</td><td>65.23</td><td>74.00</td><td>-8.77</td><td>51.49</td><td>34.83</td><td>10.94</td><td>32.03</td><td>400</td><td>349</td><td>PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.17	65.23	74.00	-8.77	51.49	34.83	10.94	32.03	400	349	PEAK	Level (dBuV/m) Date: 2024-09-14 PART 15.407 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>103.69</td><td>-----</td><td>-----</td><td>89.87</td><td>34.84</td><td>10.97</td><td>31.99</td><td>400</td><td>349</td><td>PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	103.69	-----	-----	89.87	34.84	10.97	31.99	400	349	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5350.17	65.23	74.00	-8.77	51.49	34.83	10.94	32.03	400	349	PEAK																																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5320.00	103.69	-----	-----	89.87	34.84	10.97	31.99	400	349	PEAK																																																																															
Avg	Level (dBuV/m) Date: 2024-09-14 PART 15.407 AVG <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.17</td><td>49.65</td><td>54.00</td><td>-4.35</td><td>35.91</td><td>34.83</td><td>10.94</td><td>32.03</td><td>400</td><td>349</td><td>AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.17	49.65	54.00	-4.35	35.91	34.83	10.94	32.03	400	349	AVERAGE	Level (dBuV/m) Date: 2024-09-14 PART 15.407 AVG <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>96.76</td><td>-----</td><td>-----</td><td>82.94</td><td>34.84</td><td>10.97</td><td>31.99</td><td>400</td><td>349</td><td>AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	96.76	-----	-----	82.94	34.84	10.97	31.99	400	349	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5350.17	49.65	54.00	-4.35	35.91	34.83	10.94	32.03	400	349	AVERAGE																																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5320.00	96.76	-----	-----	82.94	34.84	10.97	31.99	400	349	AVERAGE																																																																															

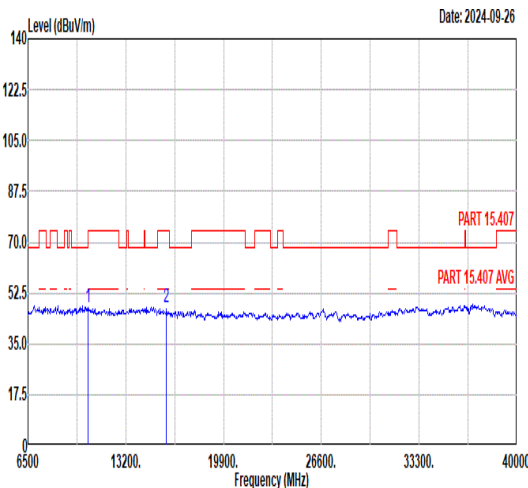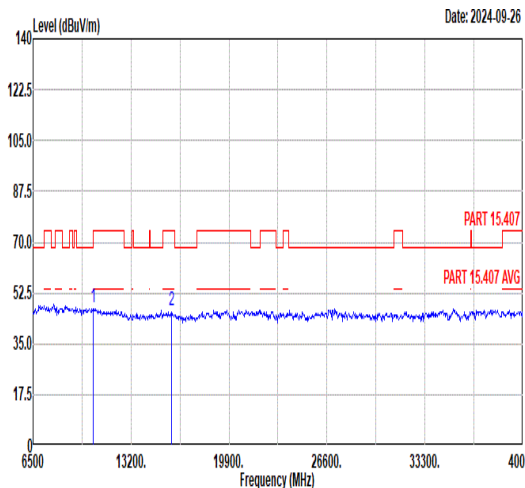

Mode	6																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																																																																	
ANT	1																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10640.00</td><td>47.66</td><td>74.00</td><td>-26.34</td><td>44.67</td><td>39.47</td><td>14.32</td><td>50.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15960.00</td><td>47.65</td><td>74.00</td><td>-26.35</td><td>40.15</td><td>42.08</td><td>17.19</td><td>51.77</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10640.00	47.66	74.00	-26.34	44.67	39.47	14.32	50.80	---	---	Peak	2	15960.00	47.65	74.00	-26.35	40.15	42.08	17.19	51.77	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10640.00</td><td>47.81</td><td>74.00</td><td>-26.19</td><td>44.82</td><td>39.47</td><td>14.32</td><td>50.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15960.00</td><td>46.25</td><td>74.00</td><td>-27.75</td><td>38.75</td><td>42.08</td><td>17.19</td><td>51.77</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10640.00	47.81	74.00	-26.19	44.82	39.47	14.32	50.80	---	---	Peak	2	15960.00	46.25	74.00	-27.75	38.75	42.08	17.19	51.77	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10640.00	47.66	74.00	-26.34	44.67	39.47	14.32	50.80	---	---	Peak																																																																																																																							
2	15960.00	47.65	74.00	-26.35	40.15	42.08	17.19	51.77	---	---	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10640.00	47.81	74.00	-26.19	44.82	39.47	14.32	50.80	---	---	Peak																																																																																																																							
2	15960.00	46.25	74.00	-27.75	38.75	42.08	17.19	51.77	---	---	Peak																																																																																																																							

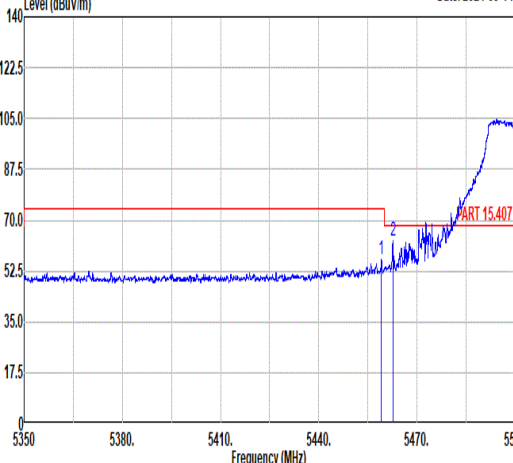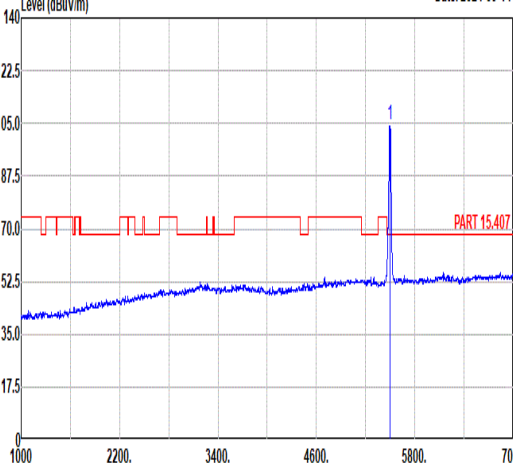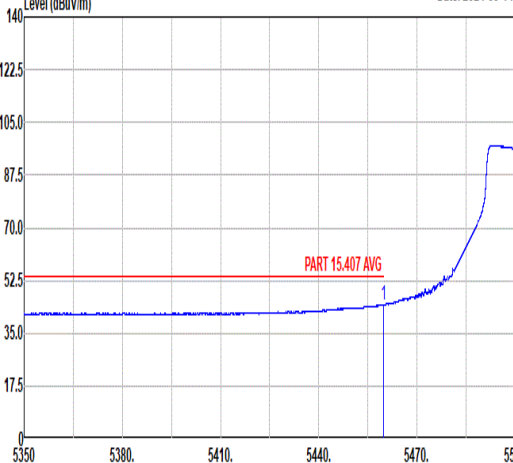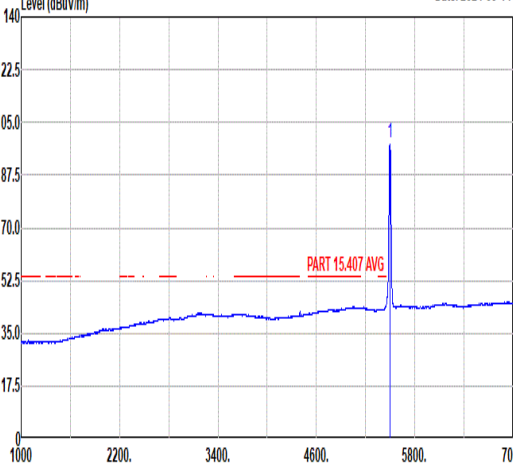

Mode	7																																																																																																										
	Band Edge																																																																																																										
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																																										
ANT	1																																																																																																										
Pol.	Horizontal						Fundamental																																																																																																				
Peak	Level (dBuV/m) Date: 2024-09-14  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5459.13</td><td>56.45</td><td>74.00</td><td>-17.55</td><td>42.68</td><td>34.81</td><td>11.12</td><td>32.16</td><td>363</td><td>75</td><td>PEAK</td></tr><tr><td>2</td><td>5462.59</td><td>62.84</td><td>68.30</td><td>-5.46</td><td>49.07</td><td>34.81</td><td>11.13</td><td>32.17</td><td>363</td><td>75</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5459.13	56.45	74.00	-17.55	42.68	34.81	11.12	32.16	363	75	PEAK	2	5462.59	62.84	68.30	-5.46	49.07	34.81	11.13	32.17	363	75	PEAK	Level (dBuV/m) Date: 2024-09-14  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>104.85</td><td>-----</td><td>-----</td><td>91.00</td><td>34.80</td><td>11.25</td><td>32.20</td><td>363</td><td>75</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5500.00	104.85	-----	-----	91.00	34.80	11.25	32.20	363	75	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	5459.13	56.45	74.00	-17.55	42.68	34.81	11.12	32.16	363	75	PEAK																																																																																																
2	5462.59	62.84	68.30	-5.46	49.07	34.81	11.13	32.17	363	75	PEAK																																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	5500.00	104.85	-----	-----	91.00	34.80	11.25	32.20	363	75	PEAK																																																																																																
Avg	Level (dBuV/m) Date: 2024-09-14  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5459.89</td><td>44.42</td><td>54.00</td><td>-9.58</td><td>30.66</td><td>34.81</td><td>11.12</td><td>32.17</td><td>363</td><td>75</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5459.89	44.42	54.00	-9.58	30.66	34.81	11.12	32.17	363	75	AVERAGE	Level (dBuV/m) Date: 2024-09-14  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>98.05</td><td>-----</td><td>-----</td><td>84.20</td><td>34.80</td><td>11.25</td><td>32.20</td><td>363</td><td>75</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5500.00	98.05	-----	-----	84.20	34.80	11.25	32.20	363	75	AVERAGE												
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	5459.89	44.42	54.00	-9.58	30.66	34.81	11.12	32.17	363	75	AVERAGE																																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	5500.00	98.05	-----	-----	84.20	34.80	11.25	32.20	363	75	AVERAGE																																																																																																



Mode	7																																																																																												
	Band Edge																																																																																												
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																												
ANT	1																																																																																												
Pol.	Vertical	Fundamental																																																																																											
Peak	Level (dBuV/m) Date: 2024-09-14 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.73</td><td>52.77</td><td>74.00</td><td>-21.23</td><td>39.00</td><td>34.81</td><td>11.12</td><td>32.16</td><td>400</td><td>9 PEAK</td></tr><tr><td>2</td><td>5468.59</td><td>58.07</td><td>68.30</td><td>-10.23</td><td>44.28</td><td>34.81</td><td>11.16</td><td>32.18</td><td>400</td><td>9 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.73	52.77	74.00	-21.23	39.00	34.81	11.12	32.16	400	9 PEAK	2	5468.59	58.07	68.30	-10.23	44.28	34.81	11.16	32.18	400	9 PEAK	Level (dBuV/m) Date: 2024-09-14 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>99.17</td><td>-----</td><td>-----</td><td>85.32</td><td>34.80</td><td>11.25</td><td>32.20</td><td>400</td><td>9 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	99.17	-----	-----	85.32	34.80	11.25	32.20	400	9 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5459.73	52.77	74.00	-21.23	39.00	34.81	11.12	32.16	400	9 PEAK																																																																																			
2	5468.59	58.07	68.30	-10.23	44.28	34.81	11.16	32.18	400	9 PEAK																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5500.00	99.17	-----	-----	85.32	34.80	11.25	32.20	400	9 PEAK																																																																																			
Avg	Level (dBuV/m) Date: 2024-09-14 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.73</td><td>42.65</td><td>54.00</td><td>-11.35</td><td>28.88</td><td>34.81</td><td>11.12</td><td>32.16</td><td>400</td><td>9 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.73	42.65	54.00	-11.35	28.88	34.81	11.12	32.16	400	9 AVERAGE	Level (dBuV/m) Date: 2024-09-14 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>92.87</td><td>-----</td><td>-----</td><td>79.01</td><td>34.80</td><td>11.27</td><td>32.21</td><td>400</td><td>9 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	92.87	-----	-----	79.01	34.80	11.27	32.21	400	9 AVERAGE											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5459.73	42.65	54.00	-11.35	28.88	34.81	11.12	32.16	400	9 AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5500.00	92.87	-----	-----	79.01	34.80	11.27	32.21	400	9 AVERAGE																																																																																			



Mode	7																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																																																																	
ANT	1																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg	Level (dBuV/m) Date: 2024-09-18 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11000.00</td><td>47.81</td><td>74.00</td><td>-26.19</td><td>44.67</td><td>39.40</td><td>14.54</td><td>50.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>16500.00</td><td>48.70</td><td>68.30</td><td>-19.60</td><td>40.74</td><td>42.40</td><td>17.36</td><td>51.80</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11000.00	47.81	74.00	-26.19	44.67	39.40	14.54	50.80	---	---	Peak	2	16500.00	48.70	68.30	-19.60	40.74	42.40	17.36	51.80	---	---	Peak	Level (dBuV/m) Date: 2024-09-18 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11000.00</td><td>47.60</td><td>74.00</td><td>-26.40</td><td>44.46</td><td>39.40</td><td>14.54</td><td>50.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>16500.00</td><td>48.63</td><td>68.30</td><td>-19.67</td><td>40.67</td><td>42.40</td><td>17.36</td><td>51.80</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11000.00	47.60	74.00	-26.40	44.46	39.40	14.54	50.80	---	---	Peak	2	16500.00	48.63	68.30	-19.67	40.67	42.40	17.36	51.80	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11000.00	47.81	74.00	-26.19	44.67	39.40	14.54	50.80	---	---	Peak																																																																																																																							
2	16500.00	48.70	68.30	-19.60	40.74	42.40	17.36	51.80	---	---	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11000.00	47.60	74.00	-26.40	44.46	39.40	14.54	50.80	---	---	Peak																																																																																																																							
2	16500.00	48.63	68.30	-19.67	40.67	42.40	17.36	51.80	---	---	Peak																																																																																																																							



Mode	8																																																																	
	Harmonic																																																																	
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																																																	
ANT	1																																																																	
Pol.	Horizontal						Vertical																																																											
Peak Avg	Level (dBuV/m) Date: 2024-09-18 Frequency (MHz)						Level (dBuV/m) Date: 2024-09-18 Frequency (MHz)																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11160.00</td><td>47.79</td><td>74.00</td><td>-26.21</td><td>44.39</td><td>39.53</td><td>14.64</td><td>50.77</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>16740.00</td><td>48.48</td><td>68.30</td><td>-19.82</td><td>40.35</td><td>42.45</td><td>17.43</td><td>51.75</td><td>---</td><td>---</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11160.00	47.79	74.00	-26.21	44.39	39.53	14.64	50.77	---	---	Peak	2	16740.00	48.48	68.30	-19.82	40.35	42.45	17.43	51.75	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	11160.00	47.79	74.00	-26.21	44.39	39.53	14.64	50.77	---	---	Peak																																																							
2	16740.00	48.48	68.30	-19.82	40.35	42.45	17.43	51.75	---	---	Peak																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11160.00</td><td>47.60</td><td>74.00</td><td>-26.40</td><td>44.20</td><td>39.53</td><td>14.64</td><td>50.77</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>16740.00</td><td>48.96</td><td>68.30</td><td>-19.34</td><td>40.83</td><td>42.45</td><td>17.43</td><td>51.75</td><td>---</td><td>---</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11160.00	47.60	74.00	-26.40	44.20	39.53	14.64	50.77	---	---	Peak	2	16740.00	48.96	68.30	-19.34	40.83	42.45	17.43	51.75	---	---	Peak	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	11160.00	47.60	74.00	-26.40	44.20	39.53	14.64	50.77	---	---	Peak																																																							
2	16740.00	48.96	68.30	-19.34	40.83	42.45	17.43	51.75	---	---	Peak																																																							



Mode	9																																																		
	Band Edge																																																		
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																		
ANT	1																																																		
Pol.	Horizontal																																																		
Peak	Level (dBuV/m) Date: 2024-09-14 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5730.78</td><td>61.11</td><td>68.30</td><td>-7.19</td><td>46.73</td><td>35.12</td><td>11.65</td><td>32.39</td><td>370</td><td>81</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5730.78	61.11	68.30	-7.19	46.73	35.12	11.65	32.39	370	81	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5730.78	61.11	68.30	-7.19	46.73	35.12	11.65	32.39	370	81	PEAK																																								
Level (dBuV/m) Date: 2024-09-14 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>103.46</td><td>-----</td><td>-----</td><td>89.08</td><td>35.07</td><td>11.67</td><td>32.36</td><td>370</td><td>81</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5700.00	103.46	-----	-----	89.08	35.07	11.67	32.36	370	81	PEAK	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5700.00	103.46	-----	-----	89.08	35.07	11.67	32.36	370	81	PEAK																																								
Avg	Blank																																																		
	Level (dBuV/m) Date: 2024-09-14 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>97.01</td><td>-----</td><td>-----</td><td>82.63</td><td>35.09</td><td>11.66</td><td>32.37</td><td>370</td><td>81</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5700.00	97.01	-----	-----	82.63	35.09	11.66	32.37	370	81	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5700.00	97.01	-----	-----	82.63	35.09	11.66	32.37	370	81	AVERAGE																																								







Mode	9																																																																															
	Band Edge																																																																															
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																															
ANT	1																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	Level (dBuV/m) Date: 2024-09-14 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5725.97</td><td>60.12</td><td>68.30</td><td>-8.18</td><td>45.74</td><td>35.12</td><td>11.65</td><td>32.39</td><td>364</td><td>1 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5725.97	60.12	68.30	-8.18	45.74	35.12	11.65	32.39	364	1 PEAK	Level (dBuV/m) Date: 2024-09-14 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>99.86</td><td>-----</td><td>-----</td><td>85.49</td><td>35.08</td><td>11.66</td><td>32.37</td><td>364</td><td>1 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5700.00	99.86	-----	-----	85.49	35.08	11.66	32.37	364	1 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	5725.97	60.12	68.30	-8.18	45.74	35.12	11.65	32.39	364	1 PEAK																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	5700.00	99.86	-----	-----	85.49	35.08	11.66	32.37	364	1 PEAK																																																																						
Avg	Blank	Level (dBuV/m) Date: 2024-09-14 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>92.73</td><td>-----</td><td>-----</td><td>78.35</td><td>35.09</td><td>11.66</td><td>32.37</td><td>364</td><td>1 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5700.00	92.73	-----	-----	78.35	35.09	11.66	32.37	364	1 AVERAGE																																							
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	5700.00	92.73	-----	-----	78.35	35.09	11.66	32.37	364	1 AVERAGE																																																																						







Mode	9																																																																																																																							
	Harmonic																																																																																																																							
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																																																							
ANT	1																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																	
Peak Avg	Level (dBuV/m) Date: 2024-09-18 Frequency (MHz)						Level (dBuV/m) Date: 2024-09-18 Frequency (MHz)																																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11400.00</td><td>47.49</td><td>74.00</td><td>-26.51</td><td>43.71</td><td>39.72</td><td>14.78</td><td>50.72</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>17100.00</td><td>48.54</td><td>68.30</td><td>-19.76</td><td>40.35</td><td>42.46</td><td>17.53</td><td>51.80</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11400.00	47.49	74.00	-26.51	43.71	39.72	14.78	50.72	---	---	Peak	2	17100.00	48.54	68.30	-19.76	40.35	42.46	17.53	51.80	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11400.00</td><td>47.42</td><td>74.00</td><td>-26.58</td><td>43.64</td><td>39.72</td><td>14.78</td><td>50.72</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>17100.00</td><td>48.95</td><td>68.30</td><td>-19.35</td><td>40.76</td><td>42.46</td><td>17.53</td><td>51.80</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11400.00	47.42	74.00	-26.58	43.64	39.72	14.78	50.72	---	---	Peak	2	17100.00	48.95	68.30	-19.35	40.76	42.46	17.53	51.80	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	11400.00	47.49	74.00	-26.51	43.71	39.72	14.78	50.72	---	---	Peak																																																																																																													
2	17100.00	48.54	68.30	-19.76	40.35	42.46	17.53	51.80	---	---	Peak																																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	11400.00	47.42	74.00	-26.58	43.64	39.72	14.78	50.72	---	---	Peak																																																																																																													
2	17100.00	48.95	68.30	-19.35	40.76	42.46	17.53	51.80	---	---	Peak																																																																																																													

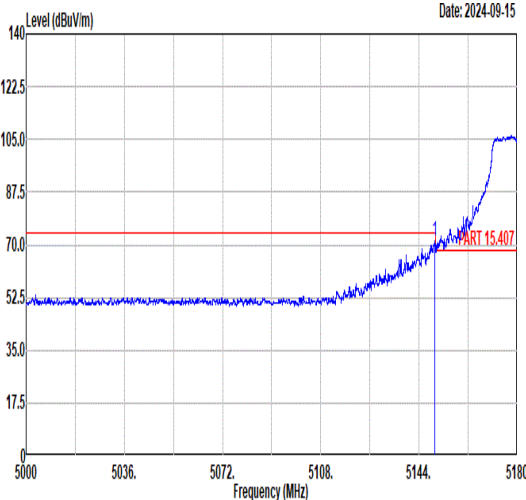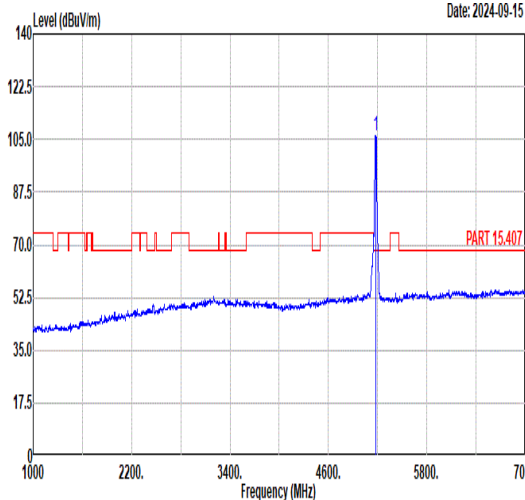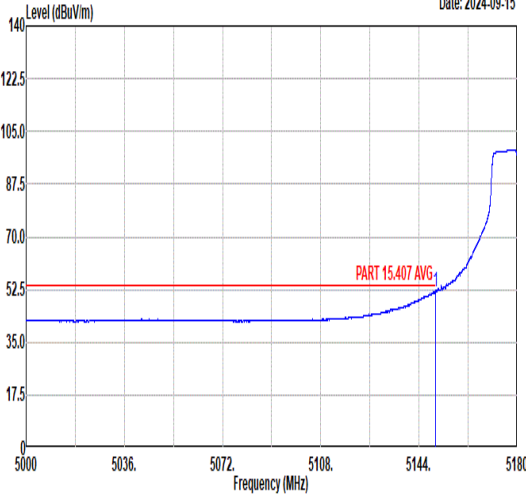
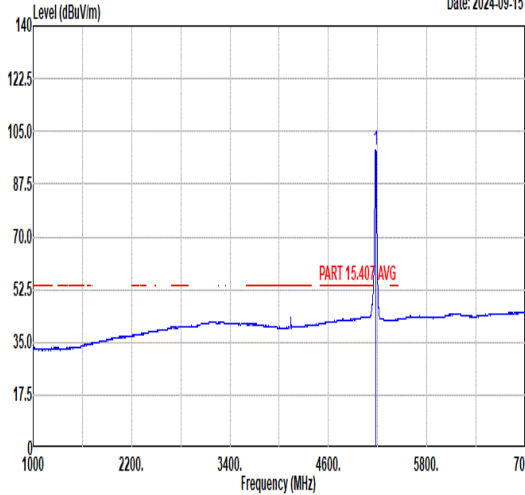


Mode	10																																																																																								
	Band Edge																																																																																								
	U-NII-1_5.15-5.25_802.11n HT20_CH36_5180MHz																																																																																								
ANT	1																																																																																								
Pol.	Horizontal					Fundamental																																																																																			
Peak																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.67</td><td>71.08</td><td>74.00</td><td>-2.92</td><td>56.90</td><td>34.87</td><td>11.09</td><td>31.78</td><td>370 93 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5149.67	71.08	74.00	-2.92	56.90	34.87	11.09	31.78	370 93 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>106.30</td><td>-----</td><td>-----</td><td>92.17</td><td>34.87</td><td>11.07</td><td>31.81</td><td>370 93 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5180.00	106.30	-----	-----	92.17	34.87	11.07	31.81
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5149.67	71.08	74.00	-2.92	56.90	34.87	11.09	31.78	370 93 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5180.00	106.30	-----	-----	92.17	34.87	11.07	31.81	370 93 PEAK																																																																																
Avg																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.99</td><td>51.94</td><td>54.00</td><td>-2.06</td><td>37.77</td><td>34.87</td><td>11.08</td><td>31.78</td><td>370 93 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5149.99	51.94	54.00	-2.06	37.77	34.87	11.08	31.78	370 93 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>98.78</td><td>-----</td><td>-----</td><td>84.65</td><td>34.87</td><td>11.07</td><td>31.81</td><td>370 93 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5180.00	98.78	-----	-----	84.65	34.87	11.07	31.81
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5149.99	51.94	54.00	-2.06	37.77	34.87	11.08	31.78	370 93 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5180.00	98.78	-----	-----	84.65	34.87	11.07	31.81	370 93 AVERAGE																																																																																

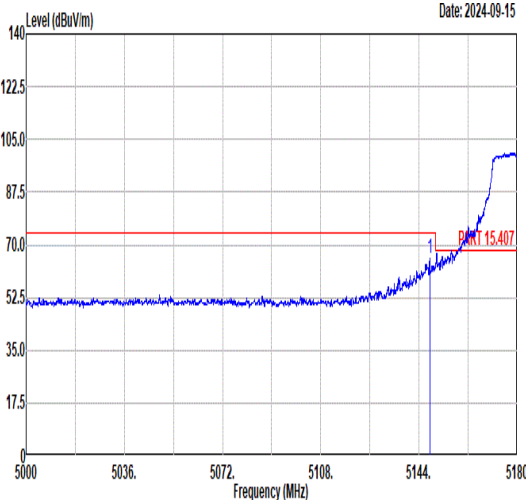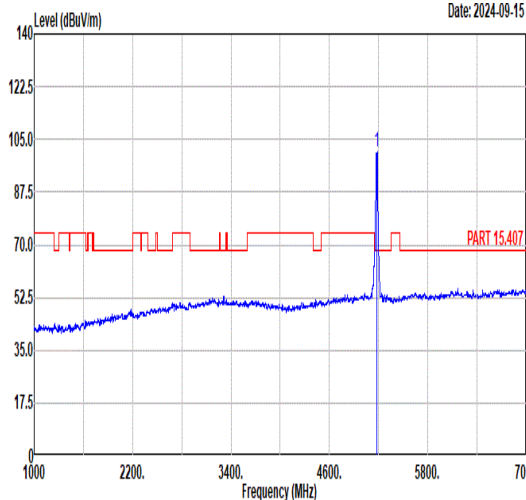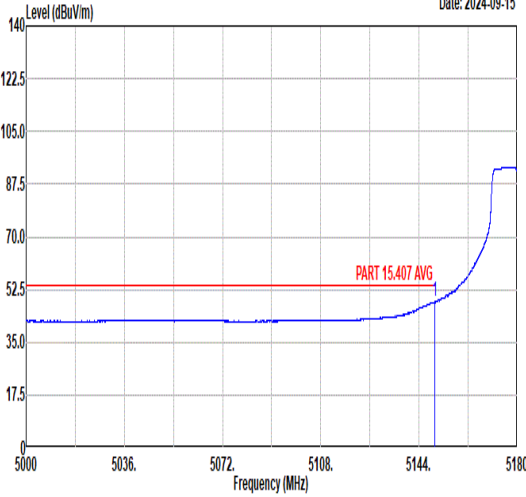
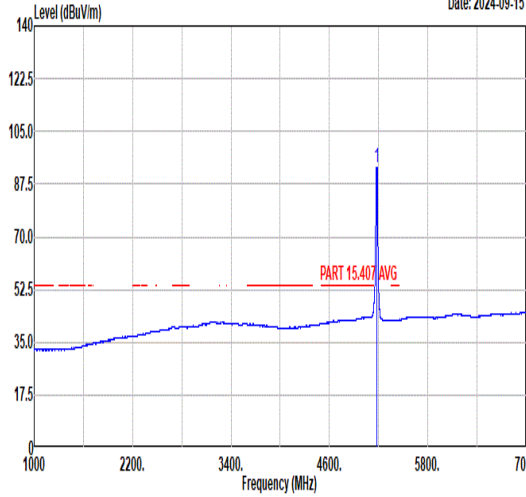


Mode	10																																																																																								
	Band Edge																																																																																								
	U-NII-1_5.15-5.25_802.11n HT20_CH36_5180MHz																																																																																								
ANT	1																																																																																								
Pol.	Vertical					Fundamental																																																																																			
Peak																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5147.89</td><td>65.30</td><td>74.00</td><td>-8.70</td><td>51.12</td><td>34.87</td><td>11.09</td><td>31.78</td><td>382</td><td>353 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5147.89	65.30	74.00	-8.70	51.12	34.87	11.09	31.78	382	353 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5180.00</td><td>100.94</td><td>-----</td><td>-----</td><td>86.83</td><td>34.86</td><td>11.07</td><td>31.82</td><td>382</td><td>353 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5180.00	100.94	-----	-----	86.83	34.86	11.07	31.82	382
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 5147.89	65.30	74.00	-8.70	51.12	34.87	11.09	31.78	382	353 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 5180.00	100.94	-----	-----	86.83	34.86	11.07	31.82	382	353 PEAK																																																																																
Avg																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5149.85</td><td>48.43</td><td>54.00</td><td>-5.57</td><td>34.25</td><td>34.87</td><td>11.09</td><td>31.78</td><td>382</td><td>353 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5149.85	48.43	54.00	-5.57	34.25	34.87	11.09	31.78	382	353 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5180.00</td><td>93.23</td><td>-----</td><td>-----</td><td>79.10</td><td>34.87</td><td>11.07</td><td>31.81</td><td>382</td><td>353 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5180.00	93.23	-----	-----	79.10	34.87	11.07	31.81	382
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 5149.85	48.43	54.00	-5.57	34.25	34.87	11.09	31.78	382	353 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 5180.00	93.23	-----	-----	79.10	34.87	11.07	31.81	382	353 AVERAGE																																																																																

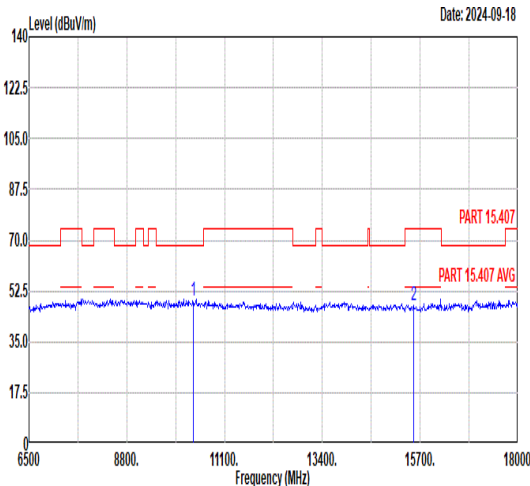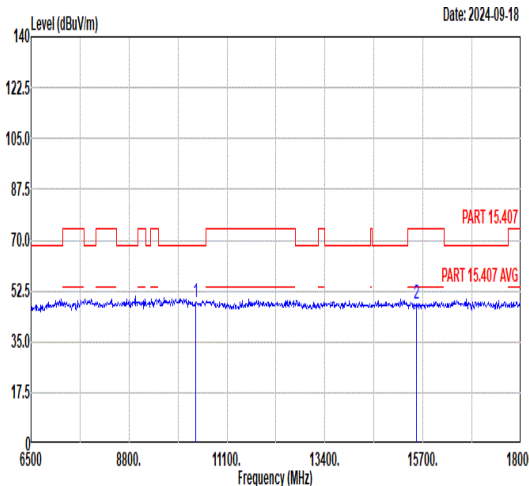

Mode	10																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-1_5.15-5.25_802.11n HT20_CH36_5180MHz																																																																																																																			
ANT	1																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg																																																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>10360.00</td><td>49.00</td><td>68.30</td><td>-19.30</td><td>46.18</td><td>39.44</td><td>14.15</td><td>50.77</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>47.58</td><td>74.00</td><td>-26.42</td><td>40.34</td><td>41.82</td><td>16.85</td><td>51.43</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10360.00	49.00	68.30	-19.30	46.18	39.44	14.15	50.77	---	---	Peak	2	15540.00	47.58	74.00	-26.42	40.34	41.82	16.85	51.43	---	---	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>10360.00</td><td>48.80</td><td>68.30</td><td>-19.50</td><td>45.98</td><td>39.44</td><td>14.15</td><td>50.77</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>47.84</td><td>74.00</td><td>-26.16</td><td>40.60</td><td>41.82</td><td>16.85</td><td>51.43</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10360.00	48.80	68.30	-19.50	45.98	39.44	14.15	50.77	---	---	Peak	2	15540.00	47.84	74.00	-26.16	40.60	41.82	16.85	51.43	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	10360.00	49.00	68.30	-19.30	46.18	39.44	14.15	50.77	---	---	Peak																																																																																																									
2	15540.00	47.58	74.00	-26.42	40.34	41.82	16.85	51.43	---	---	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	10360.00	48.80	68.30	-19.50	45.98	39.44	14.15	50.77	---	---	Peak																																																																																																									
2	15540.00	47.84	74.00	-26.16	40.60	41.82	16.85	51.43	---	---	Peak																																																																																																									

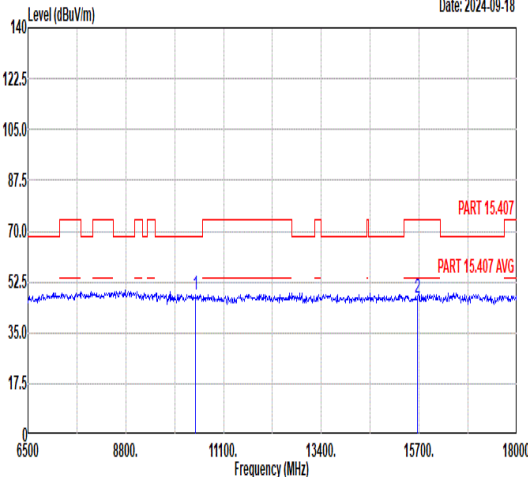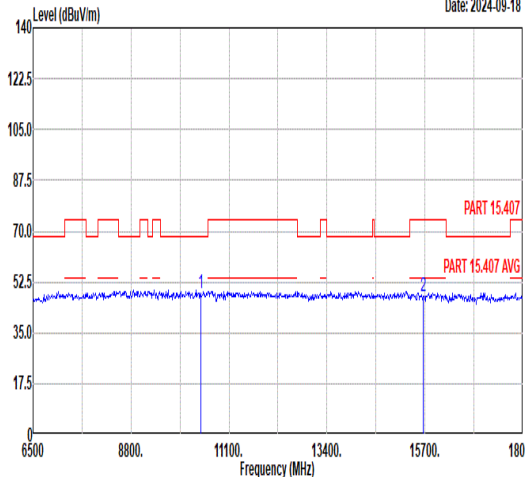

Mode	11																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-1_5.15-5.25_802.11n HT20_CH44_5220MHz																																																																																																																			
ANT	1																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg																																																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>10440.00</td><td>48.07</td><td>68.30</td><td>-20.23</td><td>45.18</td><td>39.48</td><td>14.20</td><td>50.79</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>47.06</td><td>74.00</td><td>-26.94</td><td>39.75</td><td>41.90</td><td>16.94</td><td>51.53</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	48.07	68.30	-20.23	45.18	39.48	14.20	50.79	---	---	Peak	2	15660.00	47.06	74.00	-26.94	39.75	41.90	16.94	51.53	---	---	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>10440.00</td><td>48.66</td><td>68.30</td><td>-19.64</td><td>45.77</td><td>39.48</td><td>14.20</td><td>50.79</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>47.64</td><td>74.00</td><td>-26.36</td><td>40.33</td><td>41.90</td><td>16.94</td><td>51.53</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	48.66	68.30	-19.64	45.77	39.48	14.20	50.79	---	---	Peak	2	15660.00	47.64	74.00	-26.36	40.33	41.90	16.94	51.53	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	10440.00	48.07	68.30	-20.23	45.18	39.48	14.20	50.79	---	---	Peak																																																																																																									
2	15660.00	47.06	74.00	-26.94	39.75	41.90	16.94	51.53	---	---	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	10440.00	48.66	68.30	-19.64	45.77	39.48	14.20	50.79	---	---	Peak																																																																																																									
2	15660.00	47.64	74.00	-26.36	40.33	41.90	16.94	51.53	---	---	Peak																																																																																																									





Mode	12																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-1_5.15-5.25_802.11n HT20_CH48_5240MHz																																																																																																																																	
ANT	1																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg	Level (dBuV/m) Date: 2024-09-18 Frequency (MHz)						Level (dBuV/m) Date: 2024-09-18 Frequency (MHz)																																																																																																																											
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10480.00</td><td>48.37</td><td>68.30</td><td>-19.93</td><td>45.45</td><td>39.49</td><td>14.23</td><td>50.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15720.00</td><td>47.22</td><td>74.00</td><td>-26.78</td><td>39.88</td><td>41.93</td><td>16.99</td><td>51.58</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10480.00	48.37	68.30	-19.93	45.45	39.49	14.23	50.80	---	---	Peak	2	15720.00	47.22	74.00	-26.78	39.88	41.93	16.99	51.58	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10480.00</td><td>48.48</td><td>68.30</td><td>-19.82</td><td>45.56</td><td>39.49</td><td>14.23</td><td>50.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15720.00</td><td>47.55</td><td>74.00</td><td>-26.45</td><td>40.21</td><td>41.93</td><td>16.99</td><td>51.58</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10480.00	48.48	68.30	-19.82	45.56	39.49	14.23	50.80	---	---	Peak	2	15720.00	47.55	74.00	-26.45	40.21	41.93	16.99	51.58	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10480.00	48.37	68.30	-19.93	45.45	39.49	14.23	50.80	---	---	Peak																																																																																																																							
2	15720.00	47.22	74.00	-26.78	39.88	41.93	16.99	51.58	---	---	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10480.00	48.48	68.30	-19.82	45.56	39.49	14.23	50.80	---	---	Peak																																																																																																																							
2	15720.00	47.55	74.00	-26.45	40.21	41.93	16.99	51.58	---	---	Peak																																																																																																																							







Mode	13																																																																																																					
	Harmonic																																																																																																					
	U-NII-2A_5.25-5.35_802.11n HT20_CH52_5280MHz																																																																																																					
ANT	1																																																																																																					
Pol.	Horizontal						Vertical																																																																																															
Peak Avg	Date: 2024-09-18						Date: 2024-09-18																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1 10520.00</td><td>49.01</td><td>68.30</td><td>-19.29</td><td>46.06</td><td>39.50</td><td>14.25</td><td>50.80</td><td>--- --- Peak</td></tr><tr><td>2 15780.00</td><td>47.01</td><td>74.00</td><td>-26.99</td><td>39.63</td><td>41.97</td><td>17.04</td><td>51.63</td><td>--- --- Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1 10520.00	49.01	68.30	-19.29	46.06	39.50	14.25	50.80	--- --- Peak	2 15780.00	47.01	74.00	-26.99	39.63	41.97	17.04	51.63	--- --- Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1 10520.00</td><td>48.17</td><td>68.30</td><td>-20.13</td><td>45.22</td><td>39.50</td><td>14.25</td><td>50.80</td><td>--- --- Peak</td></tr><tr><td>2 15780.00</td><td>47.44</td><td>74.00</td><td>-26.56</td><td>40.06</td><td>41.97</td><td>17.04</td><td>51.63</td><td>--- --- Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1 10520.00	48.17	68.30	-20.13	45.22	39.50	14.25	50.80	--- --- Peak	2 15780.00	47.44	74.00	-26.56	40.06	41.97	17.04	51.63	--- --- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1 10520.00	49.01	68.30	-19.29	46.06	39.50	14.25	50.80	--- --- Peak																																																																																														
2 15780.00	47.01	74.00	-26.99	39.63	41.97	17.04	51.63	--- --- Peak																																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1 10520.00	48.17	68.30	-20.13	45.22	39.50	14.25	50.80	--- --- Peak																																																																																														
2 15780.00	47.44	74.00	-26.56	40.06	41.97	17.04	51.63	--- --- Peak																																																																																														



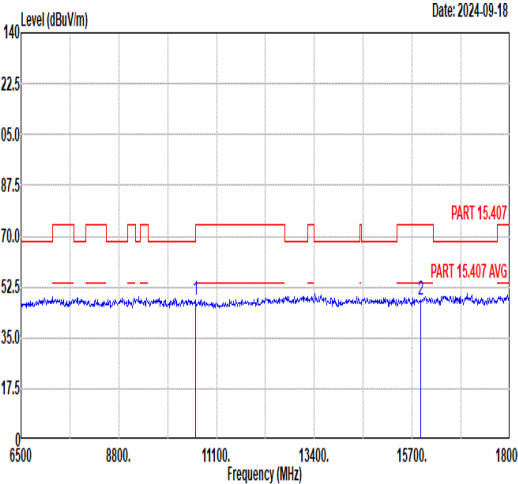
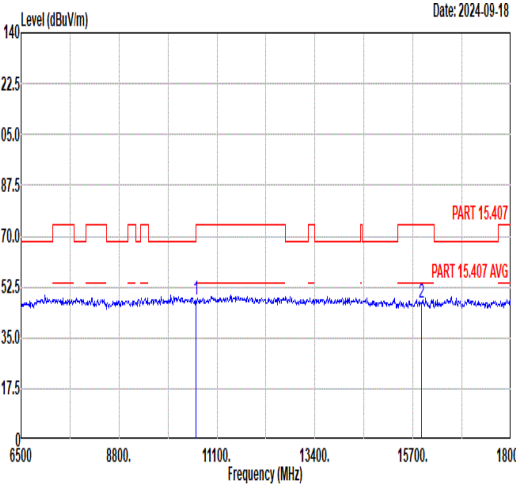


Mode	14																																																																																																																					
	Harmonic																																																																																																																					
	U-NII-2A_5.25-5.35_802.11n HT20_CH60_5300MHz																																																																																																																					
ANT	1																																																																																																																					
Pol.	Horizontal						Vertical																																																																																																															
Peak Avg																																																																																																																						
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>10600.00</td><td>47.89</td><td>74.00</td><td>-26.11</td><td>44.91</td><td>39.48</td><td>14.30</td><td>50.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15900.00</td><td>47.83</td><td>74.00</td><td>-26.17</td><td>40.37</td><td>42.04</td><td>17.14</td><td>51.72</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10600.00	47.89	74.00	-26.11	44.91	39.48	14.30	50.80	---	---	Peak	2	15900.00	47.83	74.00	-26.17	40.37	42.04	17.14	51.72	---	---	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>10600.00</td><td>47.97</td><td>74.00</td><td>-26.03</td><td>44.99</td><td>39.48</td><td>14.30</td><td>50.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15900.00</td><td>47.15</td><td>74.00</td><td>-26.85</td><td>39.69</td><td>42.04</td><td>17.14</td><td>51.72</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10600.00	47.97	74.00	-26.03	44.99	39.48	14.30	50.80	---	---	Peak	2	15900.00	47.15	74.00	-26.85	39.69	42.04	17.14	51.72	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	10600.00	47.89	74.00	-26.11	44.91	39.48	14.30	50.80	---	---	Peak																																																																																																											
2	15900.00	47.83	74.00	-26.17	40.37	42.04	17.14	51.72	---	---	Peak																																																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	10600.00	47.97	74.00	-26.03	44.99	39.48	14.30	50.80	---	---	Peak																																																																																																											
2	15900.00	47.15	74.00	-26.85	39.69	42.04	17.14	51.72	---	---	Peak																																																																																																											

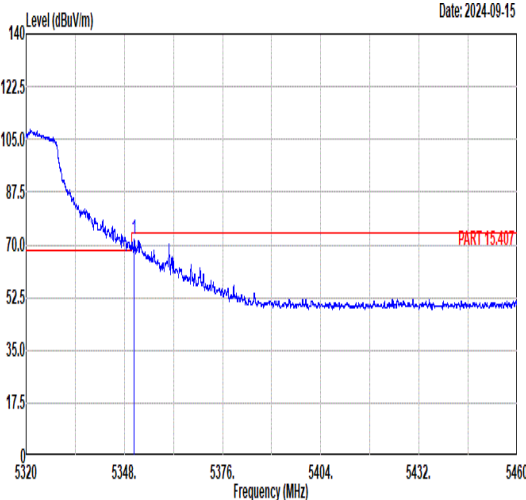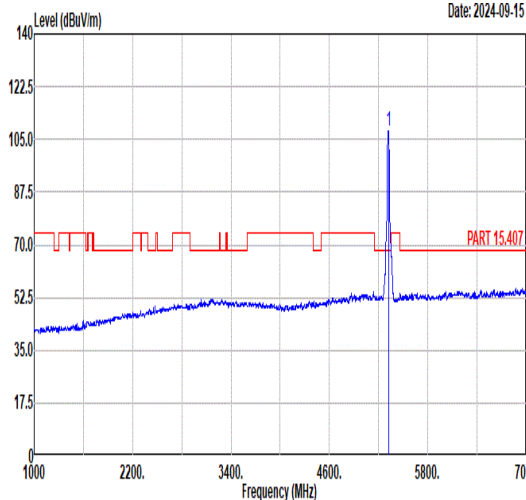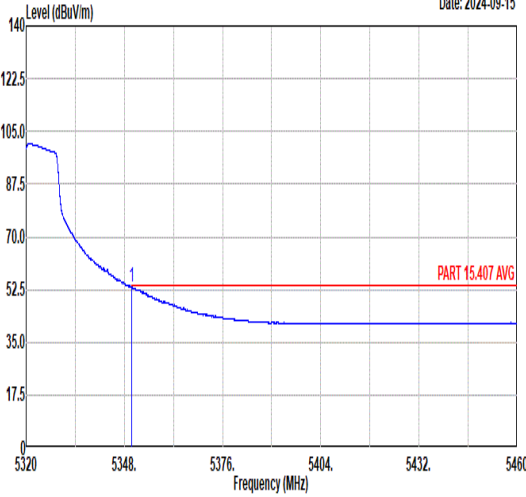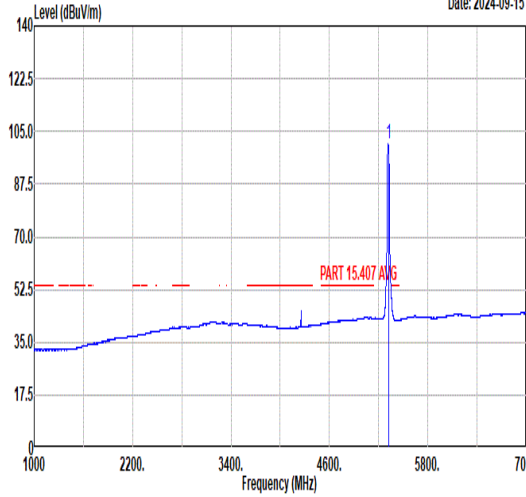

Mode	15																																																																																											
	Band Edge																																																																																											
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz																																																																																											
ANT	1																																																																																											
Pol.	Horizontal						Fundamental																																																																																					
Peak																																																																																												
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.74</td><td>72.05</td><td>74.00</td><td>-1.95</td><td>58.31</td><td>34.83</td><td>10.94</td><td>32.03</td><td>382</td><td>73 PEAK</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5350.74	72.05	74.00	-1.95	58.31	34.83	10.94	32.03	382	73 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>107.61</td><td>-----</td><td>-----</td><td>93.79</td><td>34.84</td><td>10.97</td><td>31.99</td><td>382</td><td>73 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5320.00	107.61	-----	-----	93.79	34.84	10.97	31.99	382
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5350.74	72.05	74.00	-1.95	58.31	34.83	10.94	32.03	382	73 PEAK																																																																																		
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5320.00	107.61	-----	-----	93.79	34.84	10.97	31.99	382	73 PEAK																																																																																		
Avg																																																																																												
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.03</td><td>53.43</td><td>54.00</td><td>-0.57</td><td>39.69</td><td>34.83</td><td>10.94</td><td>32.03</td><td>382</td><td>73 AVERAGE</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5350.03	53.43	54.00	-0.57	39.69	34.83	10.94	32.03	382	73 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>100.82</td><td>-----</td><td>-----</td><td>87.00</td><td>34.84</td><td>10.97</td><td>31.99</td><td>382</td><td>73 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5320.00	100.82	-----	-----	87.00	34.84	10.97	31.99	382
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5350.03	53.43	54.00	-0.57	39.69	34.83	10.94	32.03	382	73 AVERAGE																																																																																		
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5320.00	100.82	-----	-----	87.00	34.84	10.97	31.99	382	73 AVERAGE																																																																																		

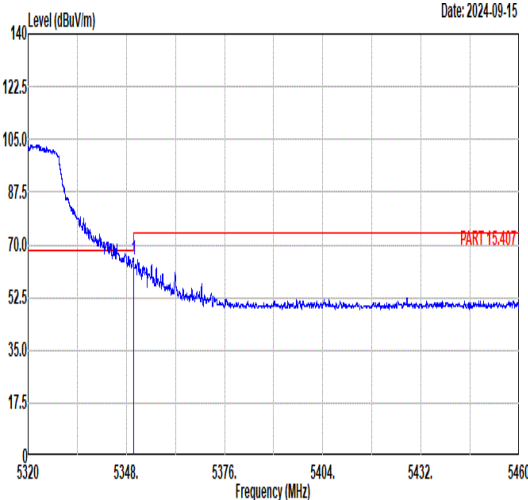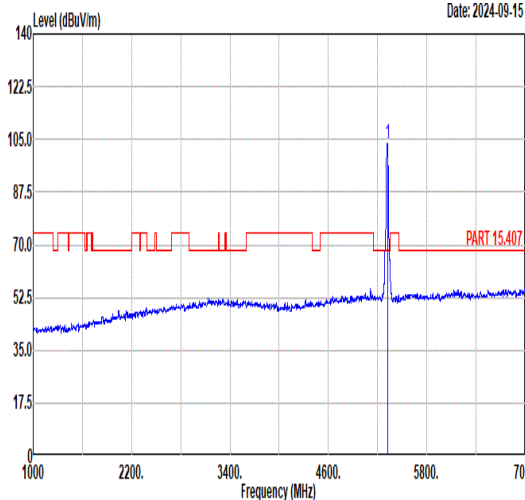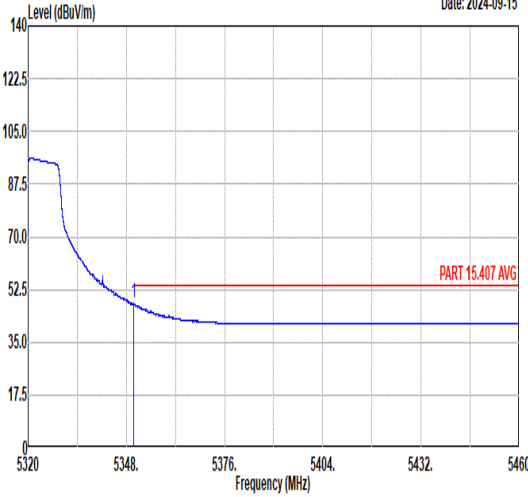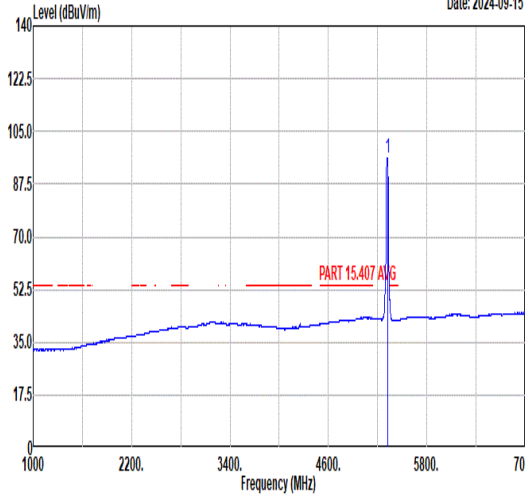

Mode	15																																																																																	
	Band Edge																																																																																	
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz																																																																																	
ANT	1																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Date: 2024-09-15 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.00</td><td>65.13</td><td>74.00</td><td>-8.87</td><td>51.39</td><td>34.83</td><td>10.94</td><td>32.03</td><td>381 346 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5350.00	65.13	74.00	-8.87	51.39	34.83	10.94	32.03	381 346 PEAK	Date: 2024-09-15 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>103.67</td><td>-----</td><td>89.85</td><td>34.84</td><td>10.97</td><td>31.99</td><td>381</td><td>346 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	103.67	-----	89.85	34.84	10.97	31.99	381	346 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5350.00	65.13	74.00	-8.87	51.39	34.83	10.94	32.03	381 346 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5320.00	103.67	-----	89.85	34.84	10.97	31.99	381	346 PEAK																																																																									
Avg	Date: 2024-09-15 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.04</td><td>47.82</td><td>54.00</td><td>-6.18</td><td>34.08</td><td>34.83</td><td>10.94</td><td>32.03</td><td>381 346 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5350.04	47.82	54.00	-6.18	34.08	34.83	10.94	32.03	381 346 AVERAGE	Date: 2024-09-15 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>96.14</td><td>-----</td><td>82.32</td><td>34.84</td><td>10.97</td><td>31.99</td><td>381</td><td>346 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	96.14	-----	82.32	34.84	10.97	31.99	381	346 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5350.04	47.82	54.00	-6.18	34.08	34.83	10.94	32.03	381 346 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5320.00	96.14	-----	82.32	34.84	10.97	31.99	381	346 AVERAGE																																																																									



Mode	15																																																																																																																						
	Harmonic																																																																																																																						
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz																																																																																																																						
ANT	1																																																																																																																						
Pol.	Horizontal										Vertical																																																																																																												
Peak Avg	Level (dBuV/m) Date: 2024-09-18 Frequency (MHz)										Level (dBuV/m) Date: 2024-09-18 Frequency (MHz)																																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10640.00</td><td>47.05</td><td>74.00</td><td>-26.95</td><td>44.06</td><td>39.47</td><td>14.32</td><td>50.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15960.00</td><td>47.23</td><td>74.00</td><td>-26.77</td><td>39.73</td><td>42.08</td><td>17.19</td><td>51.77</td><td>---</td><td>---</td><td>Peak</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10640.00	47.05	74.00	-26.95	44.06	39.47	14.32	50.80	---	---	Peak	2	15960.00	47.23	74.00	-26.77	39.73	42.08	17.19	51.77	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10640.00</td><td>47.98</td><td>74.00</td><td>-26.02</td><td>44.99</td><td>39.47</td><td>14.32</td><td>50.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15960.00</td><td>47.57</td><td>74.00</td><td>-26.43</td><td>40.07</td><td>42.08</td><td>17.19</td><td>51.77</td><td>---</td><td>---</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10640.00	47.98	74.00	-26.02	44.99	39.47	14.32	50.80	---	---	Peak	2	15960.00	47.57	74.00	-26.43	40.07	42.08	17.19	51.77	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																															
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	10640.00	47.05	74.00	-26.95	44.06	39.47	14.32	50.80	---	---	Peak																																																																																																												
2	15960.00	47.23	74.00	-26.77	39.73	42.08	17.19	51.77	---	---	Peak																																																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	10640.00	47.98	74.00	-26.02	44.99	39.47	14.32	50.80	---	---	Peak																																																																																																												
2	15960.00	47.57	74.00	-26.43	40.07	42.08	17.19	51.77	---	---	Peak																																																																																																												





Mode	16																																																																																																						
	Band Edge																																																																																																						
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz																																																																																																						
ANT	1																																																																																																						
Pol.	Horizontal						Fundamental																																																																																																
Peak	Level (dBuV/m) Date: 2024-09-13 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5453.29</td><td>60.70</td><td>74.00</td><td>-13.30</td><td>46.96</td><td>34.81</td><td>11.09</td><td>32.16</td><td>396</td><td>294</td><td>PEAK</td></tr><tr><td>2</td><td>5469.93</td><td>65.85</td><td>68.30</td><td>-2.45</td><td>52.06</td><td>34.81</td><td>11.16</td><td>32.18</td><td>396</td><td>294</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5453.29	60.70	74.00	-13.30	46.96	34.81	11.09	32.16	396	294	PEAK	2	5469.93	65.85	68.30	-2.45	52.06	34.81	11.16	32.18	396	294	PEAK	Level (dBuV/m) Date: 2024-09-13 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5500.00</td><td>105.98</td><td>-----</td><td>-----</td><td>92.08</td><td>34.81</td><td>11.30</td><td>32.21</td><td>396</td><td>294</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5500.00	105.98	-----	-----	92.08	34.81	11.30	32.21	396	294	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																														
1	5453.29	60.70	74.00	-13.30	46.96	34.81	11.09	32.16	396	294	PEAK																																																																																												
2	5469.93	65.85	68.30	-2.45	52.06	34.81	11.16	32.18	396	294	PEAK																																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																														
1	5500.00	105.98	-----	-----	92.08	34.81	11.30	32.21	396	294	PEAK																																																																																												
Avg	Level (dBuV/m) Date: 2024-09-13 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.59</td><td>44.26</td><td>54.00</td><td>-9.74</td><td>30.49</td><td>34.81</td><td>11.12</td><td>32.16</td><td>396</td><td>294</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5459.59	44.26	54.00	-9.74	30.49	34.81	11.12	32.16	396	294	AVERAGE	Level (dBuV/m) Date: 2024-09-13 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5500.00</td><td>98.55</td><td>-----</td><td>-----</td><td>84.69</td><td>34.80</td><td>11.27</td><td>32.21</td><td>396</td><td>294</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5500.00	98.55	-----	-----	84.69	34.80	11.27	32.21	396	294	AVERAGE												
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																														
1	5459.59	44.26	54.00	-9.74	30.49	34.81	11.12	32.16	396	294	AVERAGE																																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																														
1	5500.00	98.55	-----	-----	84.69	34.80	11.27	32.21	396	294	AVERAGE																																																																																												



Mode	16																																																																																																										
	Band Edge																																																																																																										
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz																																																																																																										
ANT	1																																																																																																										
Pol.	Vertical						Fundamental																																																																																																				
Peak	Level (dBuV/m) Date: 2024-09-13 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5459.43</td><td>57.03</td><td>74.00</td><td>-16.97</td><td>43.26</td><td>34.81</td><td>11.12</td><td>32.16</td><td>400</td><td>11</td><td>PEAK</td></tr><tr><td>2</td><td>5469.63</td><td>62.38</td><td>68.30</td><td>-5.92</td><td>48.59</td><td>34.81</td><td>11.16</td><td>32.18</td><td>400</td><td>11</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5459.43	57.03	74.00	-16.97	43.26	34.81	11.12	32.16	400	11	PEAK	2	5469.63	62.38	68.30	-5.92	48.59	34.81	11.16	32.18	400	11	PEAK	Level (dBuV/m) Date: 2024-09-13 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>100.32</td><td>-----</td><td>-----</td><td>86.47</td><td>34.80</td><td>11.25</td><td>32.20</td><td>400</td><td>10</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5500.00	100.32	-----	-----	86.47	34.80	11.25	32.20	400	10	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	5459.43	57.03	74.00	-16.97	43.26	34.81	11.12	32.16	400	11	PEAK																																																																																																
2	5469.63	62.38	68.30	-5.92	48.59	34.81	11.16	32.18	400	11	PEAK																																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	5500.00	100.32	-----	-----	86.47	34.80	11.25	32.20	400	10	PEAK																																																																																																
Avg	Level (dBuV/m) Date: 2024-09-13 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>42.43</td><td>54.00</td><td>-11.57</td><td>28.67</td><td>34.81</td><td>11.12</td><td>32.17</td><td>400</td><td>11</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5460.00	42.43	54.00	-11.57	28.67	34.81	11.12	32.17	400	11	AVERAGE	Level (dBuV/m) Date: 2024-09-13 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>93.82</td><td>-----</td><td>-----</td><td>79.97</td><td>34.80</td><td>11.25</td><td>32.20</td><td>400</td><td>10</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5500.00	93.82	-----	-----	79.97	34.80	11.25	32.20	400	10	AVERAGE												
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	5460.00	42.43	54.00	-11.57	28.67	34.81	11.12	32.17	400	11	AVERAGE																																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	5500.00	93.82	-----	-----	79.97	34.80	11.25	32.20	400	10	AVERAGE																																																																																																


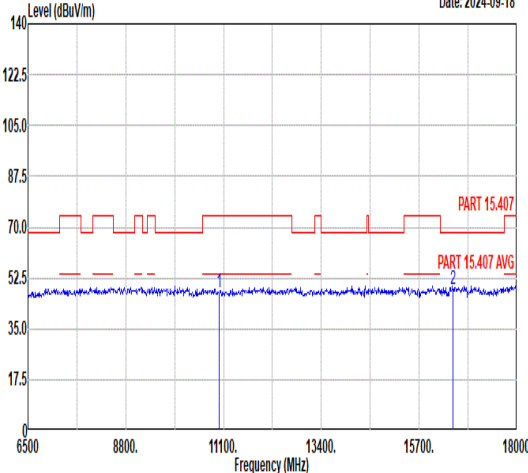
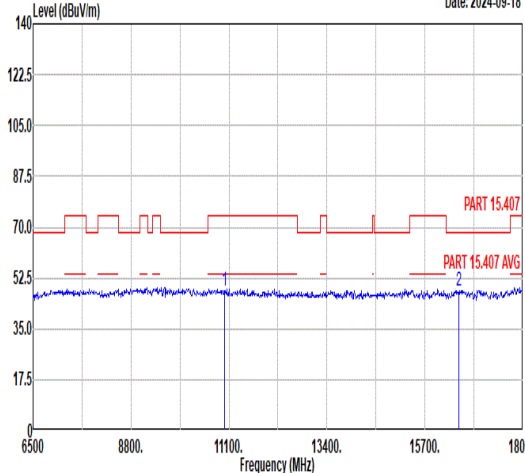


Mode	16																																																																																															
	Harmonic																																																																																															
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz																																																																																															
ANT	1																																																																																															
Pol.	Horizontal								Vertical																																																																																							
Peak Avg	Level (dBuV/m) Date: 2024-09-18 								Level (dBuV/m) Date: 2024-09-18 																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>11000.00</td><td>47.46</td><td>74.00</td><td>-26.54</td><td>44.32</td><td>39.40</td><td>14.54</td></tr><tr><td>2</td><td>16500.00</td><td>48.63</td><td>68.30</td><td>-19.67</td><td>40.67</td><td>42.40</td><td>17.36</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	1	11000.00	47.46	74.00	-26.54	44.32	39.40	14.54	2	16500.00	48.63	68.30	-19.67	40.67	42.40	17.36	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>11000.00</td><td>47.99</td><td>74.00</td><td>-26.01</td><td>44.85</td><td>39.40</td><td>14.54</td></tr><tr><td>2</td><td>16500.00</td><td>48.22</td><td>68.30</td><td>-20.08</td><td>40.26</td><td>42.40</td><td>17.36</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	1	11000.00	47.99	74.00	-26.01	44.85	39.40	14.54	2	16500.00	48.22	68.30	-20.08	40.26	42.40	17.36
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB																																																																																									
1	11000.00	47.46	74.00	-26.54	44.32	39.40	14.54																																																																																									
2	16500.00	48.63	68.30	-19.67	40.67	42.40	17.36																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB																																																																																									
1	11000.00	47.99	74.00	-26.01	44.85	39.40	14.54																																																																																									
2	16500.00	48.22	68.30	-20.08	40.26	42.40	17.36																																																																																									
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>11000.00</td><td>47.46</td><td>74.00</td><td>-26.54</td><td>44.32</td><td>39.40</td><td>14.54</td></tr><tr><td>2</td><td>16500.00</td><td>48.63</td><td>68.30</td><td>-19.67</td><td>40.67</td><td>42.40</td><td>17.36</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	1	11000.00	47.46	74.00	-26.54	44.32	39.40	14.54	2	16500.00	48.63	68.30	-19.67	40.67	42.40	17.36	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>11000.00</td><td>47.99</td><td>74.00</td><td>-26.01</td><td>44.85</td><td>39.40</td><td>14.54</td></tr><tr><td>2</td><td>16500.00</td><td>48.22</td><td>68.30</td><td>-20.08</td><td>40.26</td><td>42.40</td><td>17.36</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	1	11000.00	47.99	74.00	-26.01	44.85	39.40	14.54	2	16500.00	48.22	68.30	-20.08	40.26	42.40	17.36	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB																																																																																									
1	11000.00	47.46	74.00	-26.54	44.32	39.40	14.54																																																																																									
2	16500.00	48.63	68.30	-19.67	40.67	42.40	17.36																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB																																																																																									
1	11000.00	47.99	74.00	-26.01	44.85	39.40	14.54																																																																																									
2	16500.00	48.22	68.30	-20.08	40.26	42.40	17.36																																																																																									
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>11000.00</td><td>47.46</td><td>74.00</td><td>-26.54</td><td>44.32</td><td>39.40</td><td>14.54</td></tr><tr><td>2</td><td>16500.00</td><td>48.63</td><td>68.30</td><td>-19.67</td><td>40.67</td><td>42.40</td><td>17.36</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	1	11000.00	47.46	74.00	-26.54	44.32	39.40	14.54	2	16500.00	48.63	68.30	-19.67	40.67	42.40	17.36	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>11000.00</td><td>47.99</td><td>74.00</td><td>-26.01</td><td>44.85</td><td>39.40</td><td>14.54</td></tr><tr><td>2</td><td>16500.00</td><td>48.22</td><td>68.30</td><td>-20.08</td><td>40.26</td><td>42.40</td><td>17.36</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	1	11000.00	47.99	74.00	-26.01	44.85	39.40	14.54	2	16500.00	48.22	68.30	-20.08	40.26	42.40	17.36	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB																																																																																									
1	11000.00	47.46	74.00	-26.54	44.32	39.40	14.54																																																																																									
2	16500.00	48.63	68.30	-19.67	40.67	42.40	17.36																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB																																																																																									
1	11000.00	47.99	74.00	-26.01	44.85	39.40	14.54																																																																																									
2	16500.00	48.22	68.30	-20.08	40.26	42.40	17.36																																																																																									



Mode	17																																																																																																					
	Harmonic																																																																																																					
	U-NII-2C_5.47-5.725_802.11n HT20_CH116_5580MHz																																																																																																					
ANT	1																																																																																																					
Pol.	Horizontal						Vertical																																																																																															
Peak Avg																																																																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>11160.00</td><td>47.39</td><td>74.00</td><td>-26.61</td><td>43.99</td><td>39.53</td><td>14.64</td><td>50.77 --- --- Peak</td></tr><tr><td>2</td><td>16740.00</td><td>49.67</td><td>68.30</td><td>-18.63</td><td>41.54</td><td>42.45</td><td>17.43</td><td>51.75 --- --- Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	11160.00	47.39	74.00	-26.61	43.99	39.53	14.64	50.77 --- --- Peak	2	16740.00	49.67	68.30	-18.63	41.54	42.45	17.43	51.75 --- --- Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>11160.00</td><td>47.52</td><td>74.00</td><td>-26.48</td><td>44.12</td><td>39.53</td><td>14.64</td><td>50.77 --- --- Peak</td></tr><tr><td>2</td><td>16740.00</td><td>49.19</td><td>68.30</td><td>-19.11</td><td>41.06</td><td>42.45</td><td>17.43</td><td>51.75 --- --- Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	11160.00	47.52	74.00	-26.48	44.12	39.53	14.64	50.77 --- --- Peak	2	16740.00	49.19	68.30	-19.11	41.06	42.45	17.43	51.75 --- --- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1	11160.00	47.39	74.00	-26.61	43.99	39.53	14.64	50.77 --- --- Peak																																																																																														
2	16740.00	49.67	68.30	-18.63	41.54	42.45	17.43	51.75 --- --- Peak																																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1	11160.00	47.52	74.00	-26.48	44.12	39.53	14.64	50.77 --- --- Peak																																																																																														
2	16740.00	49.19	68.30	-19.11	41.06	42.45	17.43	51.75 --- --- Peak																																																																																														

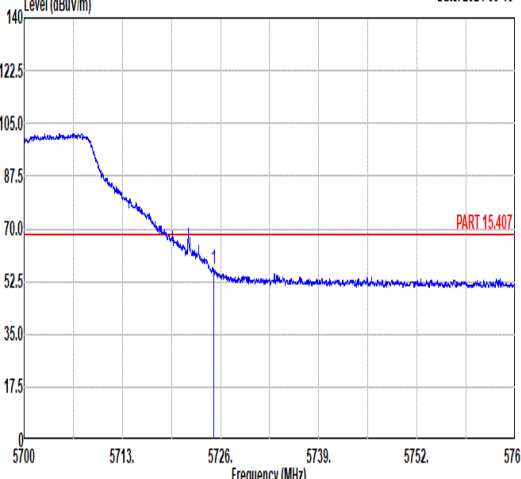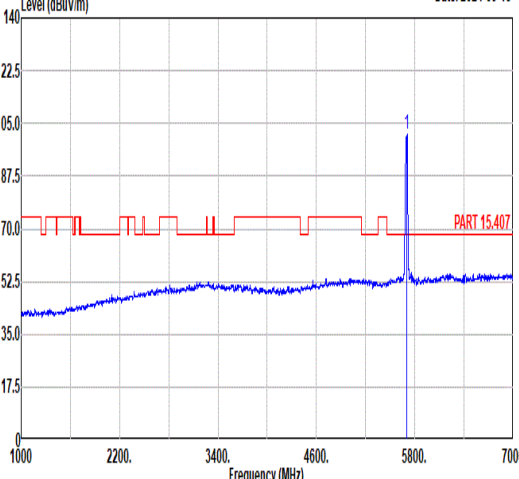
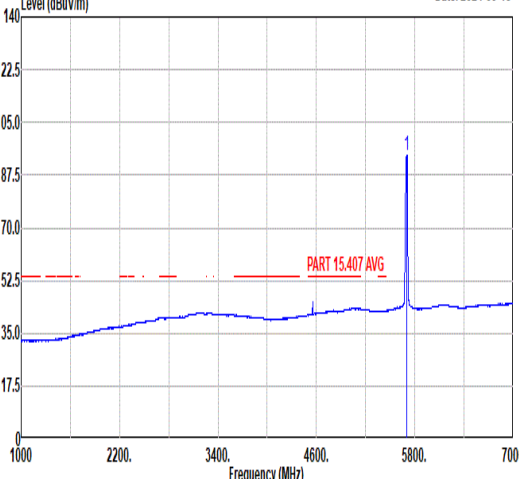


Mode	18																																																																																											
	Band Edge																																																																																											
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz																																																																																											
ANT	1																																																																																											
Pol.	Horizontal						Fundamental																																																																																					
Peak	Level (dBuV/m) Date: 2024-09-13  Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5725.06</td><td>56.59</td><td>68.30</td><td>-11.71</td><td>42.21</td><td>35.12</td><td>11.65</td><td>32.39</td><td>372</td><td>90</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5725.06	56.59	68.30	-11.71	42.21	35.12	11.65	32.39	372	90	PEAK	Level (dBuV/m) Date: 2024-09-13  Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>101.28</td><td>-----</td><td>-----</td><td>86.90</td><td>35.09</td><td>11.66</td><td>32.37</td><td>372</td><td>90</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5700.00	101.28	-----	-----	86.90	35.09	11.66	32.37	372	90	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5725.06	56.59	68.30	-11.71	42.21	35.12	11.65	32.39	372	90	PEAK																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5700.00	101.28	-----	-----	86.90	35.09	11.66	32.37	372	90	PEAK																																																																																	
Avg	Blank						Level (dBuV/m) Date: 2024-09-13  Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>94.09</td><td>-----</td><td>-----</td><td>79.71</td><td>35.09</td><td>11.66</td><td>32.37</td><td>372</td><td>90</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5700.00	94.09	-----	-----	79.71	35.09	11.66	32.37	372	90	AVERAGE																																								
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5700.00	94.09	-----	-----	79.71	35.09	11.66	32.37	372	90	AVERAGE																																																																																	







Mode	18																																																																																										
	Band Edge																																																																																										
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz																																																																																										
ANT	1																																																																																										
Pol.	Vertical						Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2024-09-13 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5729.09</td><td>61.17</td><td>68.30</td><td>-7.13</td><td>46.79</td><td>35.12</td><td>11.65</td><td>32.39</td><td>363</td><td>360</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5729.09	61.17	68.30	-7.13	46.79	35.12	11.65	32.39	363	360	PEAK	Level (dBuV/m) Date: 2024-09-13 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>97.13</td><td>-----</td><td>-----</td><td>82.76</td><td>35.08</td><td>11.66</td><td>32.37</td><td>363</td><td>360</td><td>PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5700.00	97.13	-----	-----	82.76	35.08	11.66	32.37	363	360	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5729.09	61.17	68.30	-7.13	46.79	35.12	11.65	32.39	363	360	PEAK																																																																																
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5700.00	97.13	-----	-----	82.76	35.08	11.66	32.37	363	360	PEAK																																																																																
Avg	Blank						Level (dBuV/m) Date: 2024-09-13 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>90.10</td><td>-----</td><td>-----</td><td>75.73</td><td>35.08</td><td>11.66</td><td>32.37</td><td>363</td><td>360</td><td>AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5700.00	90.10	-----	-----	75.73	35.08	11.66	32.37	363	360	AVERAGE																																								
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5700.00	90.10	-----	-----	75.73	35.08	11.66	32.37	363	360	AVERAGE																																																																																

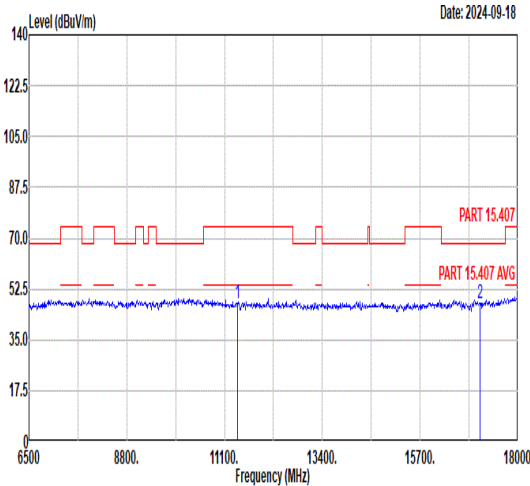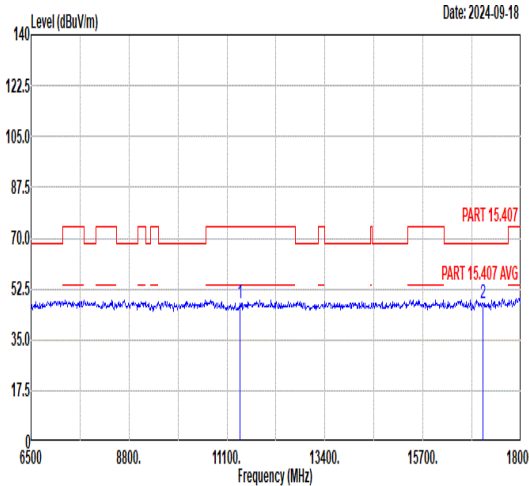

Mode	18																																																																																																																	
	Harmonic																																																																																																																	
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz																																																																																																																	
ANT	1																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																											
Peak Avg																																																																																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>11400.00</td><td>47.58</td><td>74.00</td><td>-26.42</td><td>43.80</td><td>39.72</td><td>14.78</td><td>50.72</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>17100.00</td><td>47.73</td><td>68.30</td><td>-20.57</td><td>39.54</td><td>42.46</td><td>17.53</td><td>51.80</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	11400.00	47.58	74.00	-26.42	43.80	39.72	14.78	50.72	---	---	Peak	2	17100.00	47.73	68.30	-20.57	39.54	42.46	17.53	51.80	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>11400.00</td><td>47.39</td><td>74.00</td><td>-26.61</td><td>43.61</td><td>39.72</td><td>14.78</td><td>50.72</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>17100.00</td><td>47.34</td><td>68.30</td><td>-20.96</td><td>39.15</td><td>42.46</td><td>17.53</td><td>51.80</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	11400.00	47.39	74.00	-26.61	43.61	39.72	14.78	50.72	---	---	Peak	2	17100.00	47.34	68.30	-20.96	39.15	42.46	17.53	51.80	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																										
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																											
1	11400.00	47.58	74.00	-26.42	43.80	39.72	14.78	50.72	---	---	Peak																																																																																																							
2	17100.00	47.73	68.30	-20.57	39.54	42.46	17.53	51.80	---	---	Peak																																																																																																							
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																											
1	11400.00	47.39	74.00	-26.61	43.61	39.72	14.78	50.72	---	---	Peak																																																																																																							
2	17100.00	47.34	68.30	-20.96	39.15	42.46	17.53	51.80	---	---	Peak																																																																																																							

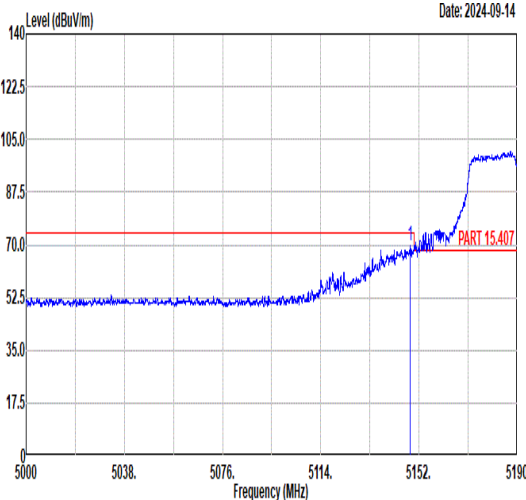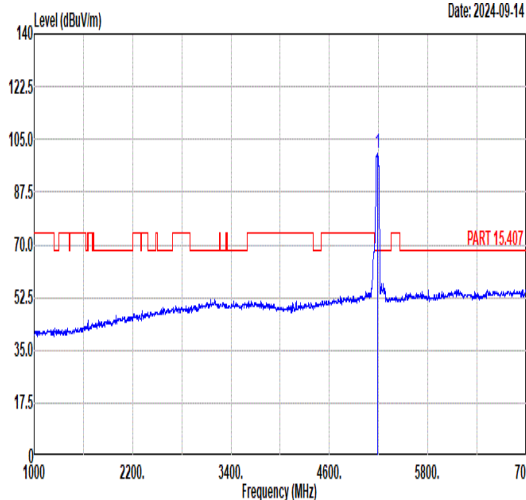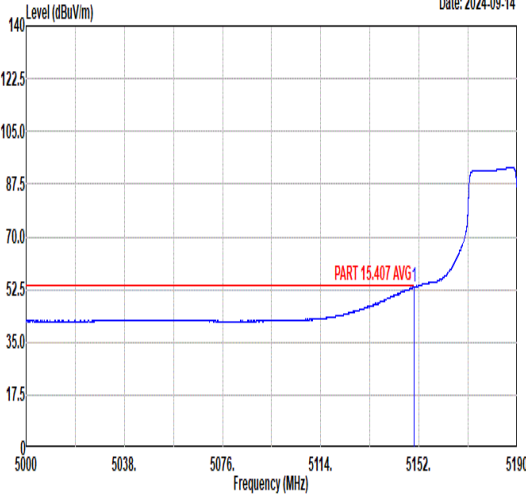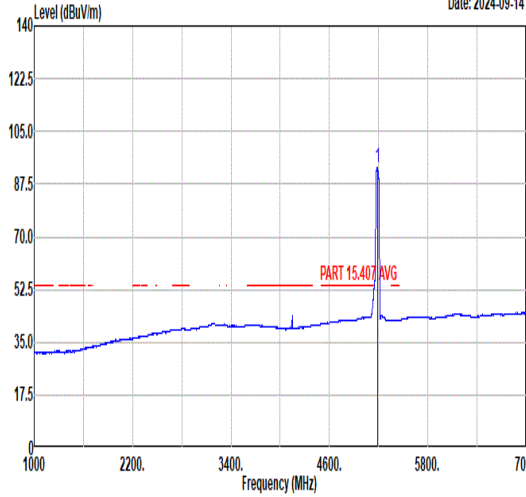

Mode	19																																																																																										
	Band Edge - L																																																																																										
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz																																																																																										
ANT	1																																																																																										
Pol.	Horizontal						Fundamental																																																																																				
Peak	 Date: 2024-09-14 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.66</td><td>69.51</td><td>74.00</td><td>-4.49</td><td>55.33</td><td>34.87</td><td>11.09</td><td>31.78</td><td>371</td><td>89</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5148.66	69.51	74.00	-4.49	55.33	34.87	11.09	31.78	371	89	PEAK	 Date: 2024-09-14 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>100.56</td><td>-----</td><td>-----</td><td>86.45</td><td>34.86</td><td>11.07</td><td>31.82</td><td>371</td><td>89</td><td>PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5190.00	100.56	-----	-----	86.45	34.86	11.07	31.82	371	89	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5148.66	69.51	74.00	-4.49	55.33	34.87	11.09	31.78	371	89	PEAK																																																																																
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5190.00	100.56	-----	-----	86.45	34.86	11.07	31.82	371	89	PEAK																																																																																
Avg	 Date: 2024-09-14 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.97</td><td>53.17</td><td>54.00</td><td>-0.83</td><td>39.00</td><td>34.87</td><td>11.08</td><td>31.78</td><td>371</td><td>89</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5149.97	53.17	54.00	-0.83	39.00	34.87	11.08	31.78	371	89	AVERAGE	 Date: 2024-09-14 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>92.90</td><td>-----</td><td>-----</td><td>78.79</td><td>34.86</td><td>11.07</td><td>31.82</td><td>371</td><td>89</td><td>AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5190.00	92.90	-----	-----	78.79	34.86	11.07	31.82	371	89	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5149.97	53.17	54.00	-0.83	39.00	34.87	11.08	31.78	371	89	AVERAGE																																																																																
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5190.00	92.90	-----	-----	78.79	34.86	11.07	31.82	371	89	AVERAGE																																																																																



Mode	19																																									
	Band Edge - R																																									
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz																																									
ANT	1																																									
Pol.	Horizontal	Fundamental																																								
Peak	Level (dBuV/m) Date: 2024-09-14 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5419.37</td><td>51.99</td><td>74.00</td><td>-22.01</td><td>38.34</td><td>34.82</td><td>10.95</td><td>32.12</td><td>371 89 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5419.37	51.99	74.00	-22.01	38.34	34.82	10.95	32.12	371 89 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5419.37	51.99	74.00	-22.01	38.34	34.82	10.95	32.12	371 89 PEAK																																	
Avg	Level (dBuV/m) Date: 2024-09-14 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5458.27</td><td>41.26</td><td>54.00</td><td>-12.74</td><td>27.50</td><td>34.81</td><td>11.11</td><td>32.16</td><td>371 89 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5458.27	41.26	54.00	-12.74	27.50	34.81	11.11	32.16	371 89 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5458.27	41.26	54.00	-12.74	27.50	34.81	11.11	32.16	371 89 AVERAGE																																	



Mode	19	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	<	







Mode	19																																																	
	Band Edge - R																																																	
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz																																																	
ANT	1																																																	
Pol.	Vertical					Fundamental																																												
Peak	Level (dBuV/m) Date: 2024-09-14 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5411.02</td><td>52.09</td><td>74.00</td><td>-21.91</td><td>38.45</td><td>34.82</td><td>10.92</td><td>32.10</td><td>385 355 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5411.02	52.09	74.00	-21.91	38.45	34.82	10.92	32.10	385 355 PEAK	Blank				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																									
1	5411.02	52.09	74.00	-21.91	38.45	34.82	10.92	32.10	385 355 PEAK																																									
Avg	Level (dBuV/m) Date: 2024-09-14 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5458.27</td><td>41.29</td><td>54.00</td><td>-12.71</td><td>27.53</td><td>34.81</td><td>11.11</td><td>32.16</td><td>385 355 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5458.27	41.29	54.00	-12.71	27.53	34.81	11.11	32.16	385 355 AVERAGE	Blank				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																									
1	5458.27	41.29	54.00	-12.71	27.53	34.81	11.11	32.16	385 355 AVERAGE																																									



Mode	19																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz																																																																																																																			
ANT	1																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg	Level (dBuV/m) Date: 2024-09-18 Frequency (MHz)						Level (dBuV/m) Date: 2024-09-18 Frequency (MHz)																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10380.00</td><td>47.85</td><td>68.30</td><td>-20.45</td><td>45.02</td><td>39.45</td><td>14.16</td><td>50.78</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15570.00</td><td>47.33</td><td>74.00</td><td>-26.67</td><td>40.08</td><td>41.84</td><td>16.87</td><td>51.46</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10380.00	47.85	68.30	-20.45	45.02	39.45	14.16	50.78	---	---	Peak	2	15570.00	47.33	74.00	-26.67	40.08	41.84	16.87	51.46	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10380.00</td><td>49.30</td><td>68.30</td><td>-19.00</td><td>46.47</td><td>39.45</td><td>14.16</td><td>50.78</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15570.00</td><td>47.58</td><td>74.00</td><td>-26.42</td><td>40.33</td><td>41.84</td><td>16.87</td><td>51.46</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10380.00	49.30	68.30	-19.00	46.47	39.45	14.16	50.78	---	---	Peak	2	15570.00	47.58	74.00	-26.42	40.33	41.84	16.87	51.46	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	10380.00	47.85	68.30	-20.45	45.02	39.45	14.16	50.78	---	---	Peak																																																																																																									
2	15570.00	47.33	74.00	-26.67	40.08	41.84	16.87	51.46	---	---	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	10380.00	49.30	68.30	-19.00	46.47	39.45	14.16	50.78	---	---	Peak																																																																																																									
2	15570.00	47.58	74.00	-26.42	40.33	41.84	16.87	51.46	---	---	Peak																																																																																																									

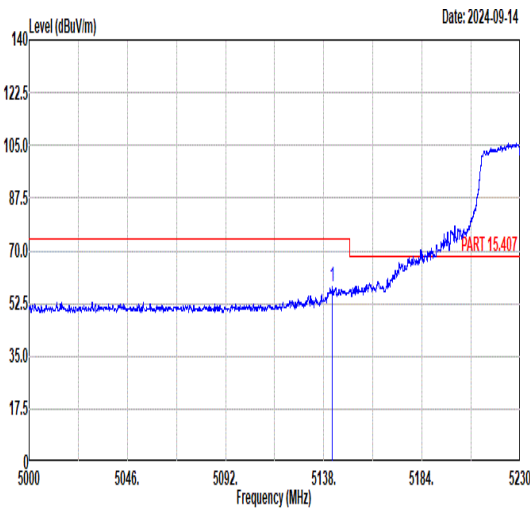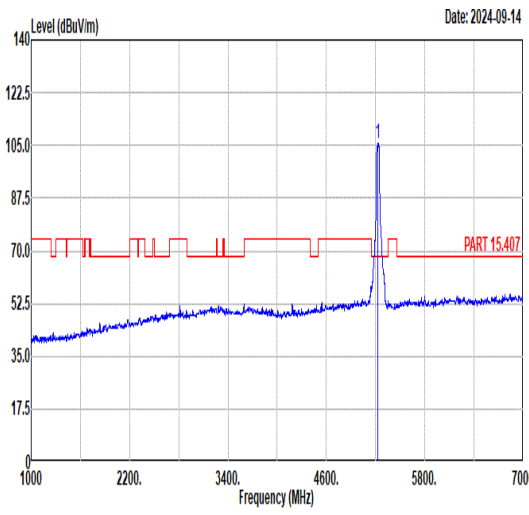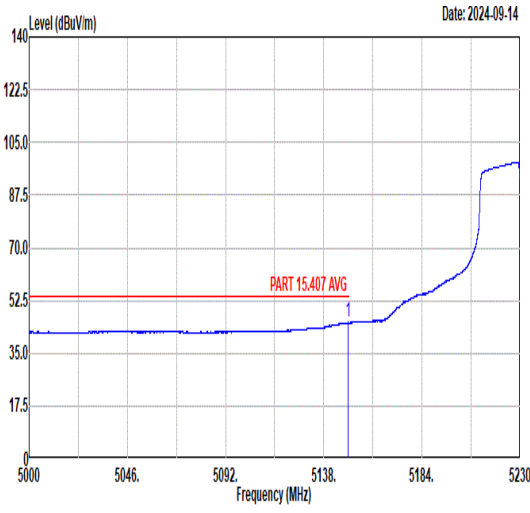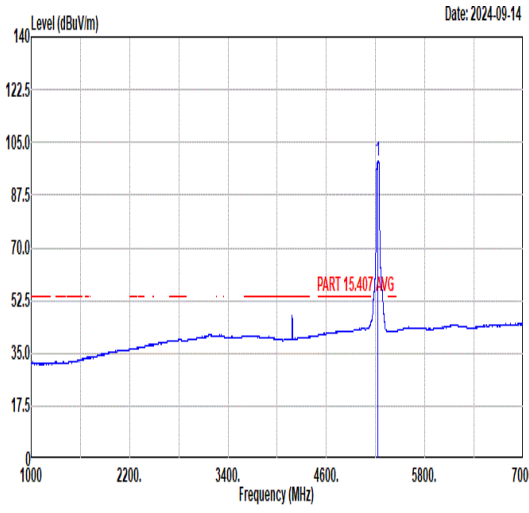

		20																																																																																																	
Mode		Band Edge - L																																																																																																	
		U-NII-1_5.15-5.25_802.11n HT40_CH46_5230MHz																																																																																																	
ANT		1																																																																																																	
Pol.		Horizontal					Fundamental																																																																																												
Peak	 Level (dBuV/m) vs Frequency (MHz). Date: 2024-09-14. A red limit line is at 70.0 dB. A peak is labeled PART 15.407 at 5138 MHz.					 Level (dBuV/m) vs Frequency (MHz). Date: 2024-09-14. A red limit line is at 70.0 dB. A sharp peak is labeled PART 15.407 at 5230 MHz.																																																																																													
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5142.05</td><td>58.29</td><td>74.00</td><td>-15.71</td><td>44.10</td><td>34.87</td><td>11.09</td><td>31.77</td><td>400</td><td>80 PEAK</td></tr></tbody></table>											Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg	1 5142.05	58.29	74.00	-15.71	44.10	34.87	11.09	31.77	400	80 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5230.00</td><td>105.73</td><td>-----</td><td>-----</td><td>91.73</td><td>34.85</td><td>11.03</td><td>31.88</td><td>400</td><td>80 PEAK</td></tr></tbody></table>											Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg	1 5230.00	105.73	-----	-----	91.73	34.85	11.03	31.88	400
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg																																																																																										
1 5142.05	58.29	74.00	-15.71	44.10	34.87	11.09	31.77	400	80 PEAK																																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg																																																																																										
1 5230.00	105.73	-----	-----	91.73	34.85	11.03	31.88	400	80 PEAK																																																																																										
Avg	 Level (dBuV/m) vs Frequency (MHz). Date: 2024-09-14. A red limit line is at 52.5 dB. A peak is labeled PART 15.407 AVG at 5138 MHz.					 Level (dBuV/m) vs Frequency (MHz). Date: 2024-09-14. A red limit line is at 52.5 dB. A sharp peak is labeled PART 15.407 AVG at 5230 MHz.																																																																																													
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5149.39</td><td>45.22</td><td>54.00</td><td>-8.78</td><td>31.04</td><td>34.87</td><td>11.09</td><td>31.78</td><td>400</td><td>80 AVERAGE</td></tr></tbody></table>											Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg	1 5149.39	45.22	54.00	-8.78	31.04	34.87	11.09	31.78	400	80 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5230.00</td><td>98.62</td><td>-----</td><td>-----</td><td>84.61</td><td>34.85</td><td>11.04</td><td>31.88</td><td>400</td><td>80 AVERAGE</td></tr></tbody></table>											Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg	1 5230.00	98.62	-----	-----	84.61	34.85	11.04	31.88	400
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg																																																																																										
1 5149.39	45.22	54.00	-8.78	31.04	34.87	11.09	31.78	400	80 AVERAGE																																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg																																																																																										
1 5230.00	98.62	-----	-----	84.61	34.85	11.04	31.88	400	80 AVERAGE																																																																																										



Mode	20																																																																									
	Band Edge - L																																																																									
	U-NII-1_5.15-5.25_802.11n HT40_CH46_5230MHz																																																																									
ANT	1																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	Level (dBuV/m) Date: 2024-09-14 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5126.18</td><td>54.08</td><td>74.00</td><td>-19.92</td><td>39.86</td><td>34.87</td><td>11.10</td><td>31.75</td><td>397 354 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1 5126.18	54.08	74.00	-19.92	39.86	34.87	11.10	31.75	397 354 PEAK	Level (dBuV/m) Date: 2024-09-14 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5230.00</td><td>101.10</td><td>-----</td><td>-----</td><td>87.10</td><td>34.85</td><td>11.03</td><td>31.88</td><td>397 354 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1 5230.00	101.10	-----	-----	87.10	34.85	11.03	31.88	397 354 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																		
1 5126.18	54.08	74.00	-19.92	39.86	34.87	11.10	31.75	397 354 PEAK																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																		
1 5230.00	101.10	-----	-----	87.10	34.85	11.03	31.88	397 354 PEAK																																																																		
Avg	Level (dBuV/m) Date: 2024-09-14 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5149.75</td><td>42.50</td><td>54.00</td><td>-11.50</td><td>28.32</td><td>34.87</td><td>11.09</td><td>31.78</td><td>397 354 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1 5149.75	42.50	54.00	-11.50	28.32	34.87	11.09	31.78	397 354 AVERAGE	Level (dBuV/m) Date: 2024-09-14 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5230.00</td><td>93.81</td><td>-----</td><td>-----</td><td>79.80</td><td>34.85</td><td>11.04</td><td>31.88</td><td>397 354 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1 5230.00	93.81	-----	-----	79.80	34.85	11.04	31.88	397 354 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																		
1 5149.75	42.50	54.00	-11.50	28.32	34.87	11.09	31.78	397 354 AVERAGE																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																		
1 5230.00	93.81	-----	-----	79.80	34.85	11.04	31.88	397 354 AVERAGE																																																																		



Mode	20																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11n HT40_CH46_5230MHz																																																		
ANT	1																																																		
Pol.	Vertical					Fundamental																																													
Peak	Date: 2024-09-14 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5358.23</td><td>52.26</td><td>74.00</td><td>-21.74</td><td>38.53</td><td>34.83</td><td>10.94</td><td>32.04</td><td>397</td><td>354 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5358.23	52.26	74.00	-21.74	38.53	34.83	10.94	32.04	397	354 PEAK	Blank				
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																										
1	5358.23	52.26	74.00	-21.74	38.53	34.83	10.94	32.04	397	354 PEAK																																									
Avg	Date: 2024-09-14 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5352.48</td><td>41.34</td><td>54.00</td><td>-12.66</td><td>27.60</td><td>34.83</td><td>10.94</td><td>32.03</td><td>397</td><td>354 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5352.48	41.34	54.00	-12.66	27.60	34.83	10.94	32.03	397	354 AVERAGE	Blank				
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																										
1	5352.48	41.34	54.00	-12.66	27.60	34.83	10.94	32.03	397	354 AVERAGE																																									



Mode	20																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-1_5.15-5.25_802.11n HT40_CH46_5230MHz																																																																																																																																	
ANT	1																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg	Level (dBuV/m) Date: 2024-09-18 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10460.00</td><td>48.37</td><td>68.30</td><td>-19.93</td><td>45.47</td><td>39.48</td><td>14.21</td><td>50.79</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15690.00</td><td>47.51</td><td>74.00</td><td>-26.49</td><td>40.18</td><td>41.91</td><td>16.97</td><td>51.55</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10460.00	48.37	68.30	-19.93	45.47	39.48	14.21	50.79	---	---	Peak	2	15690.00	47.51	74.00	-26.49	40.18	41.91	16.97	51.55	---	---	Peak	Level (dBuV/m) Date: 2024-09-18 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10460.00</td><td>47.97</td><td>68.30</td><td>-20.33</td><td>45.07</td><td>39.48</td><td>14.21</td><td>50.79</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15690.00</td><td>47.44</td><td>74.00</td><td>-26.56</td><td>40.11</td><td>41.91</td><td>16.97</td><td>51.55</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10460.00	47.97	68.30	-20.33	45.07	39.48	14.21	50.79	---	---	Peak	2	15690.00	47.44	74.00	-26.56	40.11	41.91	16.97	51.55	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10460.00	48.37	68.30	-19.93	45.47	39.48	14.21	50.79	---	---	Peak																																																																																																																							
2	15690.00	47.51	74.00	-26.49	40.18	41.91	16.97	51.55	---	---	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10460.00	47.97	68.30	-20.33	45.07	39.48	14.21	50.79	---	---	Peak																																																																																																																							
2	15690.00	47.44	74.00	-26.56	40.11	41.91	16.97	51.55	---	---	Peak																																																																																																																							







Mode	21	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	Level (dBuV/m) Date: 2024-09-14	



Mode	21																																										
	Band Edge - R																																										
	U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz																																										
ANT	1																																										
Pol.	Horizontal	Fundamental																																									
Peak	Date: 2024-09-14 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5351.61</td><td>57.52</td><td>74.00</td><td>-16.48</td><td>43.78</td><td>34.83</td><td>10.94</td><td>32.03</td><td>372</td><td>71 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5351.61	57.52	74.00	-16.48	43.78	34.83	10.94	32.03	372	71 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5351.61	57.52	74.00	-16.48	43.78	34.83	10.94	32.03	372	71 PEAK																																	
Avg	Date: 2024-09-14 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5350.29</td><td>43.18</td><td>54.00</td><td>-10.82</td><td>29.44</td><td>34.83</td><td>10.94</td><td>32.03</td><td>372</td><td>71 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5350.29	43.18	54.00	-10.82	29.44	34.83	10.94	32.03	372	71 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5350.29	43.18	54.00	-10.82	29.44	34.83	10.94	32.03	372	71 AVERAGE																																	

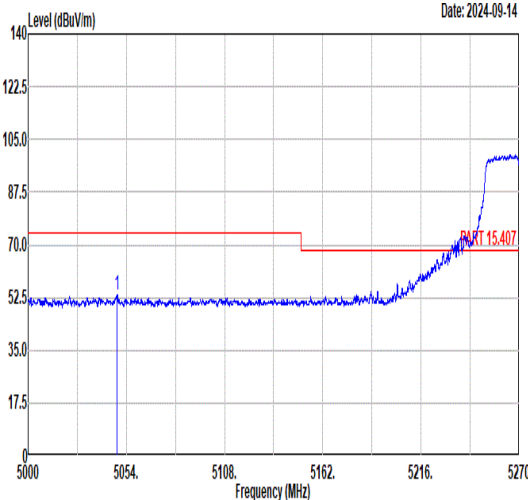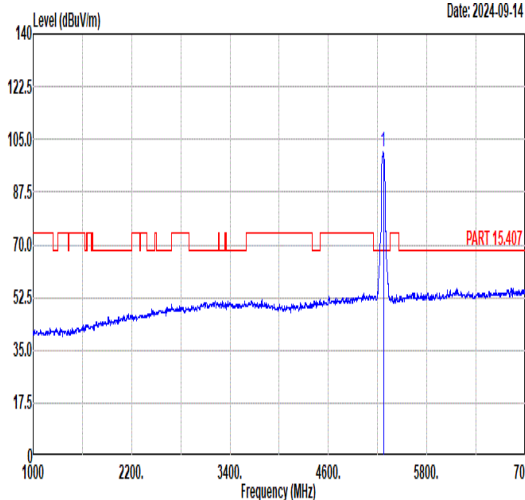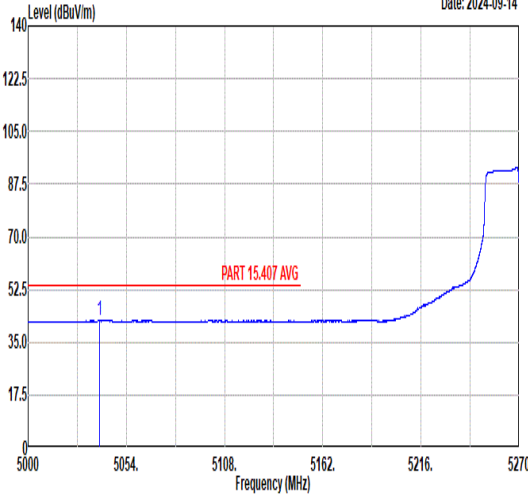
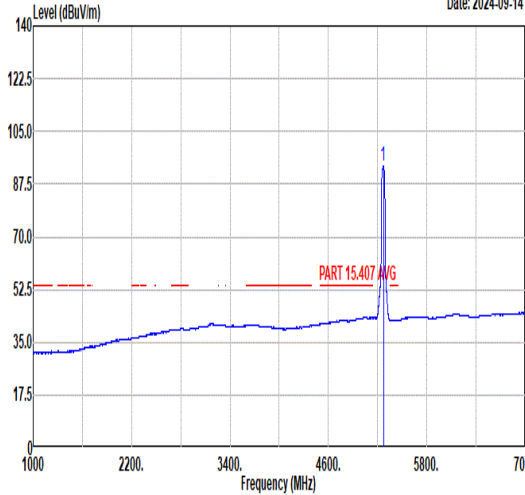


Mode	21																																																																															
	Band Edge - L																																																																															
	U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz																																																																															
ANT	1																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	Date: 2024-09-14  Level (dBuV/m) Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5048.92</td><td>53.38</td><td>74.00</td><td>-20.62</td><td>39.01</td><td>34.89</td><td>11.14</td><td>31.66</td><td>391</td><td>4 PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5048.92	53.38	74.00	-20.62	39.01	34.89	11.14	31.66	391	4 PEAK	Date: 2024-09-14  Level (dBuV/m) Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5270.00</td><td>100.77</td><td>-----</td><td>-----</td><td>86.84</td><td>34.85</td><td>11.01</td><td>31.93</td><td>391</td><td>4 PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5270.00	100.77	-----	-----	86.84	34.85	11.01	31.93	391	4 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5048.92	53.38	74.00	-20.62	39.01	34.89	11.14	31.66	391	4 PEAK																																																																						
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5270.00	100.77	-----	-----	86.84	34.85	11.01	31.93	391	4 PEAK																																																																						
Avg	Date: 2024-09-14  Level (dBuV/m) Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5039.31</td><td>42.19</td><td>54.00</td><td>-11.81</td><td>27.79</td><td>34.89</td><td>11.15</td><td>31.64</td><td>391</td><td>4 AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5039.31	42.19	54.00	-11.81	27.79	34.89	11.15	31.64	391	4 AVERAGE	Date: 2024-09-14  Level (dBuV/m) Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5270.00</td><td>93.59</td><td>-----</td><td>-----</td><td>79.66</td><td>34.85</td><td>11.01</td><td>31.93</td><td>391</td><td>4 AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5270.00	93.59	-----	-----	79.66	34.85	11.01	31.93	391	4 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5039.31	42.19	54.00	-11.81	27.79	34.89	11.15	31.64	391	4 AVERAGE																																																																						
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5270.00	93.59	-----	-----	79.66	34.85	11.01	31.93	391	4 AVERAGE																																																																						



Mode	21																																																
	Band Edge - R																																																
	U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz																																																
ANT	1																																																
Pol.	Vertical					Fundamental																																											
Peak	Date: 2024-09-14 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5378.02</td><td>52.06</td><td>74.00</td><td>-21.94</td><td>38.38</td><td>34.82</td><td>10.92</td><td>32.06</td><td>391</td><td>4 PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5378.02	52.06	74.00	-21.94	38.38	34.82	10.92	32.06	391	4 PEAK	Blank				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																								
1	5378.02	52.06	74.00	-21.94	38.38	34.82	10.92	32.06	391	4 PEAK																																							
Avg	Date: 2024-09-14 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.01</td><td>41.49</td><td>54.00</td><td>-12.51</td><td>27.75</td><td>34.83</td><td>10.94</td><td>32.03</td><td>391</td><td>4 AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5350.01	41.49	54.00	-12.51	27.75	34.83	10.94	32.03	391	4 AVERAGE	Blank				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																								
1	5350.01	41.49	54.00	-12.51	27.75	34.83	10.94	32.03	391	4 AVERAGE																																							

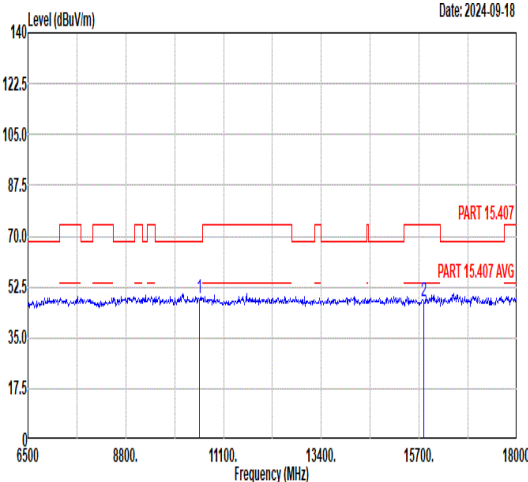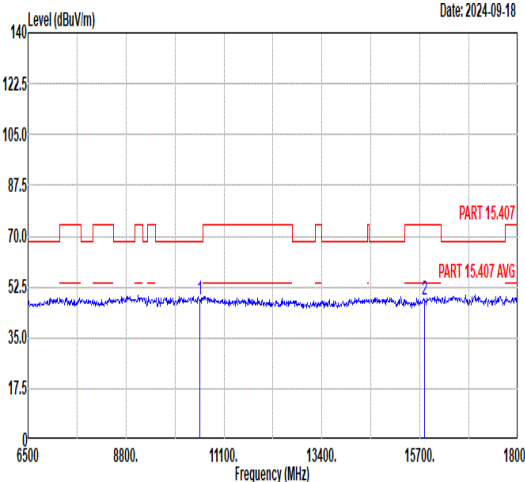

Mode	21																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz																																																																																																																																	
ANT	1																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10540.00</td><td>48.61</td><td>68.30</td><td>-19.69</td><td>45.66</td><td>39.49</td><td>14.26</td><td>50.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15810.00</td><td>47.54</td><td>74.00</td><td>-26.46</td><td>40.14</td><td>41.99</td><td>17.06</td><td>51.65</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10540.00	48.61	68.30	-19.69	45.66	39.49	14.26	50.80	---	---	Peak	2	15810.00	47.54	74.00	-26.46	40.14	41.99	17.06	51.65	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10540.00</td><td>48.05</td><td>68.30</td><td>-20.25</td><td>45.10</td><td>39.49</td><td>14.26</td><td>50.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15810.00</td><td>47.85</td><td>74.00</td><td>-26.15</td><td>40.45</td><td>41.99</td><td>17.06</td><td>51.65</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10540.00	48.05	68.30	-20.25	45.10	39.49	14.26	50.80	---	---	Peak	2	15810.00	47.85	74.00	-26.15	40.45	41.99	17.06	51.65	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10540.00	48.61	68.30	-19.69	45.66	39.49	14.26	50.80	---	---	Peak																																																																																																																							
2	15810.00	47.54	74.00	-26.46	40.14	41.99	17.06	51.65	---	---	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10540.00	48.05	68.30	-20.25	45.10	39.49	14.26	50.80	---	---	Peak																																																																																																																							
2	15810.00	47.85	74.00	-26.15	40.45	41.99	17.06	51.65	---	---	Peak																																																																																																																							





Mode	22																																																																																										
	Band Edge - L																																																																																										
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																																																																										
ANT	1																																																																																										
Pol.	Horizontal						Fundamental																																																																																				
Peak																																																																																											
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5125.09</td><td>53.13</td><td>74.00</td><td>-20.87</td><td>38.91</td><td>34.87</td><td>11.10</td><td>31.75</td><td>384 71 PEAK</td></tr></tbody></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5125.09	53.13	74.00	-20.87	38.91	34.87	11.10	31.75	384 71 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5310.00</td><td>104.96</td><td>-----</td><td>-----</td><td>91.14</td><td>34.84</td><td>10.97</td><td>31.99</td><td>384 71 PEAK</td></tr></tbody></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5310.00	104.96	-----	-----	91.14	34.84	10.97	31.99
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5125.09	53.13	74.00	-20.87	38.91	34.87	11.10	31.75	384 71 PEAK																																																																																		
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5310.00	104.96	-----	-----	91.14	34.84	10.97	31.99	384 71 PEAK																																																																																		
Avg																																																																																											
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5065.57</td><td>42.32</td><td>54.00</td><td>-11.68</td><td>27.98</td><td>34.89</td><td>11.13</td><td>31.68</td><td>384 71 AVERAGE</td></tr></tbody></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5065.57	42.32	54.00	-11.68	27.98	34.89	11.13	31.68	384 71 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5310.00</td><td>96.59</td><td>-----</td><td>-----</td><td>82.76</td><td>34.84</td><td>10.97</td><td>31.98</td><td>384 71 AVERAGE</td></tr></tbody></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5310.00	96.59	-----	-----	82.76	34.84	10.97	31.98
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5065.57	42.32	54.00	-11.68	27.98	34.89	11.13	31.68	384 71 AVERAGE																																																																																		
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5310.00	96.59	-----	-----	82.76	34.84	10.97	31.98	384 71 AVERAGE																																																																																		





Mode	22																																																																																									
	Band Edge - L																																																																																									
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																																																																									
ANT	1																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2024-09-14 1 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5121.40</td><td>53.19</td><td>74.00</td><td>-20.81</td><td>38.96</td><td>34.88</td><td>11.10</td><td>31.75</td><td>384</td><td>352</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5121.40	53.19	74.00	-20.81	38.96	34.88	11.10	31.75	384	352	PEAK	Level (dBuV/m) Date: 2024-09-14 1 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5310.00</td><td>99.02</td><td>-----</td><td>-----</td><td>85.19</td><td>34.84</td><td>10.97</td><td>31.98</td><td>384</td><td>352</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5310.00	99.02	-----	-----	85.19	34.84	10.97	31.98	384	352	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																		
1	5121.40	53.19	74.00	-20.81	38.96	34.88	11.10	31.75	384	352	PEAK																																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																		
1	5310.00	99.02	-----	-----	85.19	34.84	10.97	31.98	384	352	PEAK																																																																															
Avg	Level (dBuV/m) Date: 2024-09-14 1 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5038.94</td><td>42.29</td><td>54.00</td><td>-11.71</td><td>27.89</td><td>34.89</td><td>11.15</td><td>31.64</td><td>384</td><td>352</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5038.94	42.29	54.00	-11.71	27.89	34.89	11.15	31.64	384	352	AVERAGE	Level (dBuV/m) Date: 2024-09-14 1 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5310.00</td><td>90.88</td><td>-----</td><td>-----</td><td>77.03</td><td>34.84</td><td>10.98</td><td>31.97</td><td>384</td><td>352</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5310.00	90.88	-----	-----	77.03	34.84	10.98	31.97	384	352	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																		
1	5038.94	42.29	54.00	-11.71	27.89	34.89	11.15	31.64	384	352	AVERAGE																																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																		
1	5310.00	90.88	-----	-----	77.03	34.84	10.98	31.97	384	352	AVERAGE																																																																															

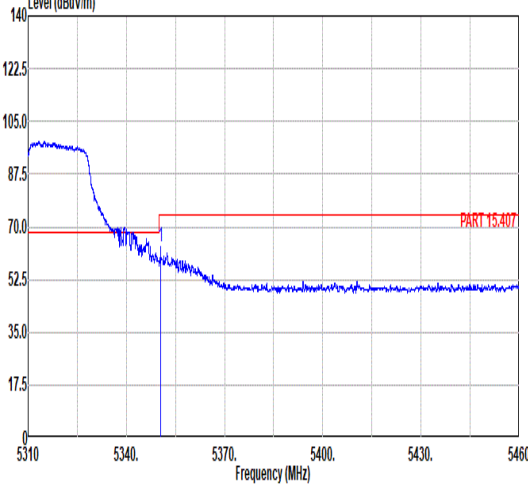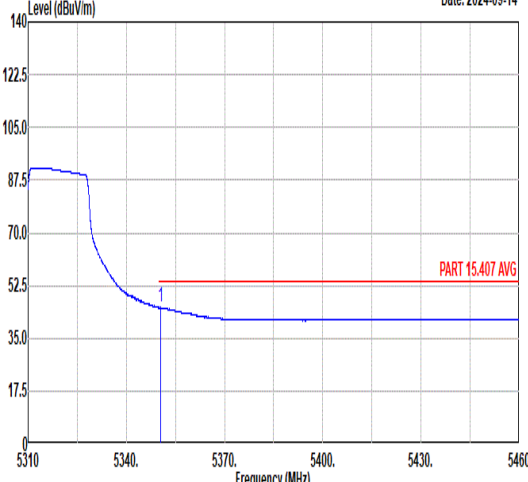

Mode	22																																																	
	Band Edge - R																																																	
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																																	
ANT	1																																																	
Pol.	Vertical					Fundamental																																												
Peak	Level (dBuV/m) Date: 2024-09-14 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.43</td><td>63.35</td><td>74.00</td><td>-10.65</td><td>49.61</td><td>34.83</td><td>10.94</td><td>32.03</td><td>384 352 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5350.43	63.35	74.00	-10.65	49.61	34.83	10.94	32.03	384 352 PEAK	Blank				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																									
1	5350.43	63.35	74.00	-10.65	49.61	34.83	10.94	32.03	384 352 PEAK																																									
Avg	Level (dBuV/m) Date: 2024-09-14 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.43</td><td>45.17</td><td>54.00</td><td>-8.83</td><td>31.43</td><td>34.83</td><td>10.94</td><td>32.03</td><td>384 352 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5350.43	45.17	54.00	-8.83	31.43	34.83	10.94	32.03	384 352 AVERAGE	Blank				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																									
1	5350.43	45.17	54.00	-8.83	31.43	34.83	10.94	32.03	384 352 AVERAGE																																									

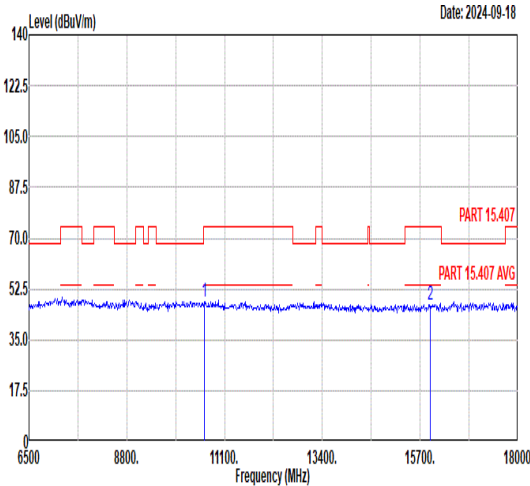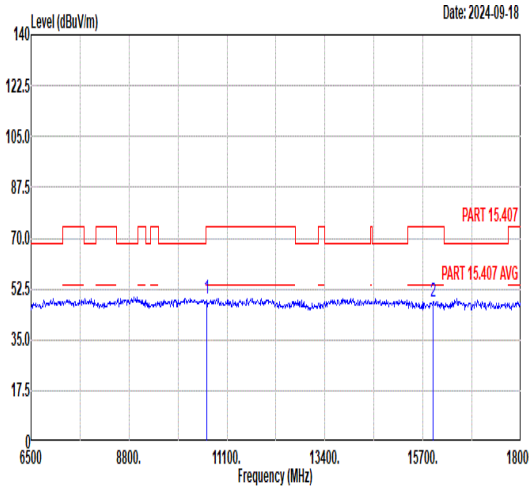

Mode	22																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																																																																																																			
ANT	1																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg																																																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>10620.00</td><td>47.88</td><td>74.00</td><td>-26.12</td><td>44.89</td><td>39.48</td><td>14.31</td><td>50.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15930.00</td><td>47.23</td><td>74.00</td><td>-26.77</td><td>39.76</td><td>42.06</td><td>17.16</td><td>51.75</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10620.00	47.88	74.00	-26.12	44.89	39.48	14.31	50.80	---	---	Peak	2	15930.00	47.23	74.00	-26.77	39.76	42.06	17.16	51.75	---	---	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>10620.00</td><td>49.09</td><td>74.00</td><td>-24.91</td><td>46.10</td><td>39.48</td><td>14.31</td><td>50.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15930.00</td><td>48.24</td><td>74.00</td><td>-25.76</td><td>40.77</td><td>42.06</td><td>17.16</td><td>51.75</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10620.00	49.09	74.00	-24.91	46.10	39.48	14.31	50.80	---	---	Peak	2	15930.00	48.24	74.00	-25.76	40.77	42.06	17.16	51.75	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	10620.00	47.88	74.00	-26.12	44.89	39.48	14.31	50.80	---	---	Peak																																																																																																									
2	15930.00	47.23	74.00	-26.77	39.76	42.06	17.16	51.75	---	---	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	10620.00	49.09	74.00	-24.91	46.10	39.48	14.31	50.80	---	---	Peak																																																																																																									
2	15930.00	48.24	74.00	-25.76	40.77	42.06	17.16	51.75	---	---	Peak																																																																																																									



Mode	23																																																																																											
	Band Edge - L																																																																																											
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																																																																											
ANT	1																																																																																											
Pol.	Horizontal	Fundamental																																																																																										
Peak	Level (dBuV/m) Date: 2024-09-14 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5457.60</td><td>63.38</td><td>74.00</td><td>-10.62</td><td>49.62</td><td>34.81</td><td>11.11</td><td>32.16</td><td>365 76 PEAK</td></tr><tr><td>2</td><td>5464.18</td><td>65.02</td><td>68.30</td><td>-3.28</td><td>51.24</td><td>34.81</td><td>11.14</td><td>32.17</td><td>365 76 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5457.60	63.38	74.00	-10.62	49.62	34.81	11.11	32.16	365 76 PEAK	2	5464.18	65.02	68.30	-3.28	51.24	34.81	11.14	32.17	365 76 PEAK	Level (dBuV/m) Date: 2024-09-14 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5510.00</td><td>99.19</td><td>-----</td><td>85.34</td><td>34.80</td><td>11.25</td><td>32.20</td><td>365</td><td>76 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	99.19	-----	85.34	34.80	11.25	32.20	365	76 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5457.60	63.38	74.00	-10.62	49.62	34.81	11.11	32.16	365 76 PEAK																																																																																			
2	5464.18	65.02	68.30	-3.28	51.24	34.81	11.14	32.17	365 76 PEAK																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5510.00	99.19	-----	85.34	34.80	11.25	32.20	365	76 PEAK																																																																																			
Avg	Level (dBuV/m) Date: 2024-09-14 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.62</td><td>45.65</td><td>54.00</td><td>-8.35</td><td>31.88</td><td>34.81</td><td>11.12</td><td>32.16</td><td>365 76 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5459.62	45.65	54.00	-8.35	31.88	34.81	11.12	32.16	365 76 AVERAGE	Level (dBuV/m) Date: 2024-09-14 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5510.00</td><td>92.34</td><td>-----</td><td>78.49</td><td>34.80</td><td>11.25</td><td>32.20</td><td>365</td><td>76 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	92.34	-----	78.49	34.80	11.25	32.20	365	76 AVERAGE										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5459.62	45.65	54.00	-8.35	31.88	34.81	11.12	32.16	365 76 AVERAGE																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5510.00	92.34	-----	78.49	34.80	11.25	32.20	365	76 AVERAGE																																																																																			





Mode	23																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																									
ANT	1																																									
Pol.	Horizontal	Fundamental																																								
Peak	Date: 2024-09-14 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5732.49</td><td>52.50</td><td>68.30</td><td>-15.80</td><td>38.11</td><td>35.13</td><td>11.65</td><td>32.39</td><td>365</td><td>76</td><td>PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5732.49	52.50	68.30	-15.80	38.11	35.13	11.65	32.39	365	76	PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																	
1	5732.49	52.50	68.30	-15.80	38.11	35.13	11.65	32.39	365	76	PEAK																															







Mode	23																																																																																											
	Band Edge - L																																																																																											
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																																																																											
ANT	1																																																																																											
Pol.	Vertical	Fundamental																																																																																										
Peak	Level (dBuV/m) Date: 2024-09-14 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5458.56</td><td>54.65</td><td>74.00</td><td>-19.35</td><td>40.89</td><td>34.81</td><td>11.11</td><td>32.16</td><td>399 7 PEAK</td></tr><tr><td>2</td><td>5466.26</td><td>60.04</td><td>68.30</td><td>-8.26</td><td>46.25</td><td>34.81</td><td>11.15</td><td>32.17</td><td>399 7 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5458.56	54.65	74.00	-19.35	40.89	34.81	11.11	32.16	399 7 PEAK	2	5466.26	60.04	68.30	-8.26	46.25	34.81	11.15	32.17	399 7 PEAK	Level (dBuV/m) Date: 2024-09-14 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5510.00</td><td>95.99</td><td>-----</td><td>82.14</td><td>34.80</td><td>11.25</td><td>32.20</td><td>399</td><td>7 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	95.99	-----	82.14	34.80	11.25	32.20	399	7 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5458.56	54.65	74.00	-19.35	40.89	34.81	11.11	32.16	399 7 PEAK																																																																																			
2	5466.26	60.04	68.30	-8.26	46.25	34.81	11.15	32.17	399 7 PEAK																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5510.00	95.99	-----	82.14	34.80	11.25	32.20	399	7 PEAK																																																																																			
Avg	Level (dBuV/m) Date: 2024-09-14 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.84</td><td>41.93</td><td>54.00</td><td>-12.07</td><td>28.17</td><td>34.81</td><td>11.12</td><td>32.17</td><td>399 7 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5459.84	41.93	54.00	-12.07	28.17	34.81	11.12	32.17	399 7 AVERAGE	Level (dBuV/m) Date: 2024-09-14 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5510.00</td><td>88.92</td><td>-----</td><td>75.06</td><td>34.80</td><td>11.27</td><td>32.21</td><td>399</td><td>7 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	88.92	-----	75.06	34.80	11.27	32.21	399	7 AVERAGE										
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5459.84	41.93	54.00	-12.07	28.17	34.81	11.12	32.17	399 7 AVERAGE																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5510.00	88.92	-----	75.06	34.80	11.27	32.21	399	7 AVERAGE																																																																																			

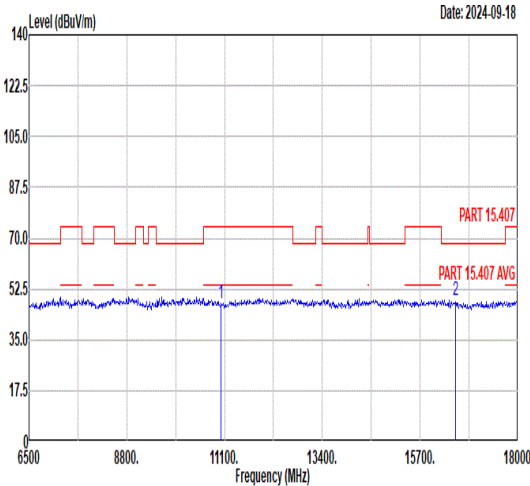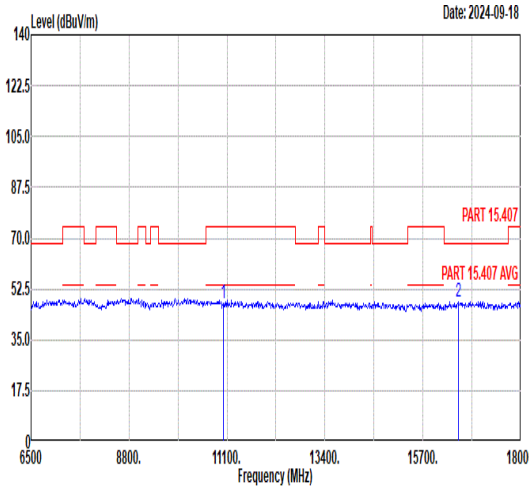

Mode	23																																																																																																					
	Harmonic																																																																																																					
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																																																																																					
ANT	1																																																																																																					
Pol.	Horizontal						Vertical																																																																																															
Peak Avg																																																																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>11020.00</td><td>47.45</td><td>74.00</td><td>-26.55</td><td>44.28</td><td>39.42</td><td>14.55</td><td>50.80</td></tr><tr><td>2</td><td>16530.00</td><td>48.56</td><td>68.30</td><td>-19.74</td><td>40.57</td><td>42.41</td><td>17.37</td><td>51.79</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	11020.00	47.45	74.00	-26.55	44.28	39.42	14.55	50.80	2	16530.00	48.56	68.30	-19.74	40.57	42.41	17.37	51.79	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>11020.00</td><td>47.55</td><td>74.00</td><td>-26.45</td><td>44.38</td><td>39.42</td><td>14.55</td><td>50.80</td></tr><tr><td>2</td><td>16530.00</td><td>47.83</td><td>68.30</td><td>-20.47</td><td>39.84</td><td>42.41</td><td>17.37</td><td>51.79</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	11020.00	47.55	74.00	-26.45	44.38	39.42	14.55	50.80	2	16530.00	47.83	68.30	-20.47	39.84	42.41	17.37	51.79
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1	11020.00	47.45	74.00	-26.55	44.28	39.42	14.55	50.80																																																																																														
2	16530.00	48.56	68.30	-19.74	40.57	42.41	17.37	51.79																																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1	11020.00	47.55	74.00	-26.45	44.38	39.42	14.55	50.80																																																																																														
2	16530.00	47.83	68.30	-20.47	39.84	42.41	17.37	51.79																																																																																														
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>11020.00</td><td>47.45</td><td>74.00</td><td>-26.55</td><td>44.28</td><td>39.42</td><td>14.55</td><td>50.80</td></tr><tr><td>2</td><td>16530.00</td><td>48.56</td><td>68.30</td><td>-19.74</td><td>40.57</td><td>42.41</td><td>17.37</td><td>51.79</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	11020.00	47.45	74.00	-26.55	44.28	39.42	14.55	50.80	2	16530.00	48.56	68.30	-19.74	40.57	42.41	17.37	51.79	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>11020.00</td><td>47.55</td><td>74.00</td><td>-26.45</td><td>44.38</td><td>39.42</td><td>14.55</td><td>50.80</td></tr><tr><td>2</td><td>16530.00</td><td>47.83</td><td>68.30</td><td>-20.47</td><td>39.84</td><td>42.41</td><td>17.37</td><td>51.79</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	11020.00	47.55	74.00	-26.45	44.38	39.42	14.55	50.80	2	16530.00	47.83	68.30	-20.47	39.84	42.41	17.37	51.79	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1	11020.00	47.45	74.00	-26.55	44.28	39.42	14.55	50.80																																																																																														
2	16530.00	48.56	68.30	-19.74	40.57	42.41	17.37	51.79																																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1	11020.00	47.55	74.00	-26.45	44.38	39.42	14.55	50.80																																																																																														
2	16530.00	47.83	68.30	-20.47	39.84	42.41	17.37	51.79																																																																																														

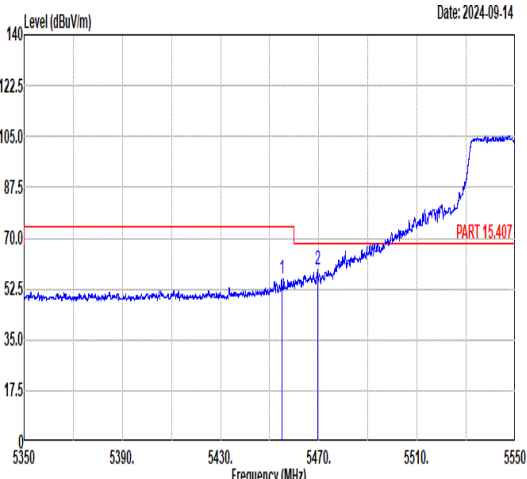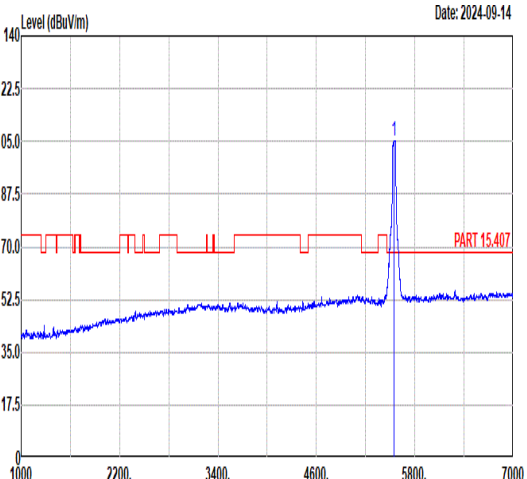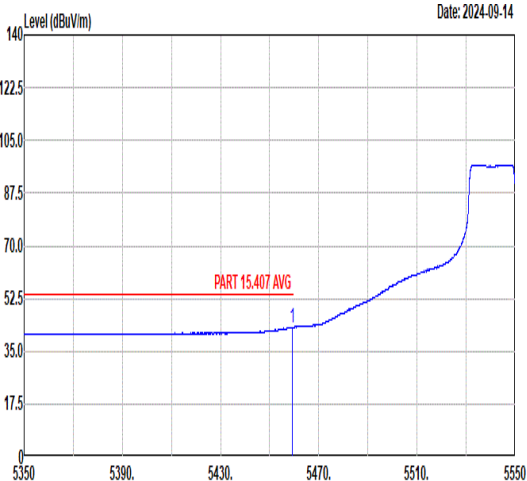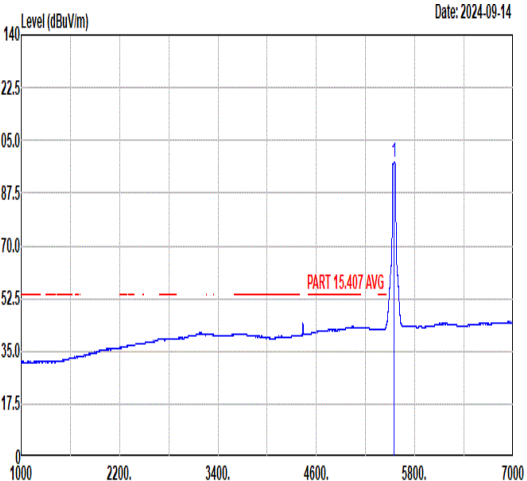

Mode	24																																																														
	Band Edge - L																																																														
	U-NII-2C_5.47-5.725_802.11n HT40_CH110_5550MHz																																																														
ANT	1																																																														
Pol.	Horizontal					Fundamental																																																									
Peak	 Level (dBuV/m) Date: 2024-09-14 Frequency (MHz) Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>5454.92</td><td>56.21</td><td>74.00</td><td>-17.79</td><td>42.46</td><td>34.81</td><td>11.10</td><td>32.16</td><td>372</td><td>74 PEAK</td></tr><tr><td>2</td><td>5469.50</td><td>59.03</td><td>68.30</td><td>-9.27</td><td>45.24</td><td>34.81</td><td>11.16</td><td>32.18</td><td>372</td><td>74 PEAK</td></tr></table>					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5454.92	56.21	74.00	-17.79	42.46	34.81	11.10	32.16	372	74 PEAK	2	5469.50	59.03	68.30	-9.27	45.24	34.81	11.16	32.18	372	74 PEAK	 Level (dBuV/m) Date: 2024-09-14 Frequency (MHz) Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>5550.00</td><td>105.20</td><td>-----</td><td>-----</td><td>91.05</td><td>34.88</td><td>11.52</td><td>32.25</td><td>372</td><td>74 PEAK</td></tr></table>					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5550.00	105.20	-----	-----	91.05	34.88	11.52	32.25	372	74 PEAK
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																																					
1	5454.92	56.21	74.00	-17.79	42.46	34.81	11.10	32.16	372	74 PEAK																																																					
2	5469.50	59.03	68.30	-9.27	45.24	34.81	11.16	32.18	372	74 PEAK																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																																						
1	5550.00	105.20	-----	-----	91.05	34.88	11.52	32.25	372	74 PEAK																																																					
Avg	 Level (dBuV/m) Date: 2024-09-14 Frequency (MHz) Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>5459.10</td><td>43.02</td><td>54.00</td><td>-10.98</td><td>29.25</td><td>34.81</td><td>11.12</td><td>32.16</td><td>372</td><td>74 AVERAGE</td></tr></table>					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5459.10	43.02	54.00	-10.98	29.25	34.81	11.12	32.16	372	74 AVERAGE	 Level (dBuV/m) Date: 2024-09-14 Frequency (MHz) Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>5550.00</td><td>97.78</td><td>-----</td><td>-----</td><td>83.66</td><td>34.87</td><td>11.50</td><td>32.25</td><td>372</td><td>74 AVERAGE</td></tr></table>					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5550.00	97.78	-----	-----	83.66	34.87	11.50	32.25	372	74 AVERAGE											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																																					
1	5459.10	43.02	54.00	-10.98	29.25	34.81	11.12	32.16	372	74 AVERAGE																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																																						
1	5550.00	97.78	-----	-----	83.66	34.87	11.50	32.25	372	74 AVERAGE																																																					





Mode	24																																																														
	Band Edge - L																																																														
	U-NII-2C_5.47-5.725_802.11n HT40_CH110_5550MHz																																																														
ANT	1																																																														
Pol.	Vertical					Fundamental																																																									
Peak	Level (dBuV/m) Date: 2024-09-14 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>5443.92</td><td>54.01</td><td>74.00</td><td>-19.99</td><td>40.30</td><td>34.81</td><td>11.05</td><td>32.15</td><td>388</td><td>6 PEAK</td></tr><tr><td>2</td><td>5463.72</td><td>54.54</td><td>68.30</td><td>-13.76</td><td>40.76</td><td>34.81</td><td>11.14</td><td>32.17</td><td>388</td><td>6 PEAK</td></tr></table>					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5443.92	54.01	74.00	-19.99	40.30	34.81	11.05	32.15	388	6 PEAK	2	5463.72	54.54	68.30	-13.76	40.76	34.81	11.14	32.17	388	6 PEAK	Level (dBuV/m) Date: 2024-09-14 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>5550.00</td><td>99.86</td><td>-----</td><td>-----</td><td>85.74</td><td>34.87</td><td>11.50</td><td>32.25</td><td>388</td><td>6 PEAK</td></tr></table>					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5550.00	99.86	-----	-----	85.74	34.87	11.50	32.25	388	6 PEAK
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																																					
1	5443.92	54.01	74.00	-19.99	40.30	34.81	11.05	32.15	388	6 PEAK																																																					
2	5463.72	54.54	68.30	-13.76	40.76	34.81	11.14	32.17	388	6 PEAK																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																																						
1	5550.00	99.86	-----	-----	85.74	34.87	11.50	32.25	388	6 PEAK																																																					
Avg	Level (dBuV/m) Date: 2024-09-14 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>5459.50</td><td>42.39</td><td>54.00</td><td>-11.61</td><td>28.62</td><td>34.81</td><td>11.12</td><td>32.16</td><td>388</td><td>6 AVERAGE</td></tr></table>					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5459.50	42.39	54.00	-11.61	28.62	34.81	11.12	32.16	388	6 AVERAGE	Level (dBuV/m) Date: 2024-09-14 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>5550.00</td><td>92.07</td><td>-----</td><td>-----</td><td>77.95</td><td>34.87</td><td>11.50</td><td>32.25</td><td>388</td><td>6 AVERAGE</td></tr></table>					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5550.00	92.07	-----	-----	77.95	34.87	11.50	32.25	388	6 AVERAGE											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																																					
1	5459.50	42.39	54.00	-11.61	28.62	34.81	11.12	32.16	388	6 AVERAGE																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																																						
1	5550.00	92.07	-----	-----	77.95	34.87	11.50	32.25	388	6 AVERAGE																																																					



Mode	24																																										
	Band Edge - R																																										
	U-NII-2C_5.47-5.725_802.11n HT40_CH110_5550MHz																																										
ANT	1																																										
Pol.	Vertical	Fundamental																																									
Peak	Date: 2024-09-14 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5728.58</td><td>52.62</td><td>68.30</td><td>-15.68</td><td>38.24</td><td>35.12</td><td>11.65</td><td>32.39</td><td>388</td><td>6 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5728.58	52.62	68.30	-15.68	38.24	35.12	11.65	32.39	388	6 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																		
1	5728.58	52.62	68.30	-15.68	38.24	35.12	11.65	32.39	388	6 PEAK																																	



Mode	24																																																																																															
	Harmonic																																																																																															
	U-NII-2C_5.47-5.725_802.11n HT40_CH110_5550MHz																																																																																															
ANT	1																																																																																															
Pol.	Horizontal								Vertical																																																																																							
Peak Avg	Level (dBuV/m) Date: 2024-09-18 Frequency (MHz)								Level (dBuV/m) Date: 2024-09-18 Frequency (MHz)																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>11100.00</td><td>47.01</td><td>74.00</td><td>-26.99</td><td>43.71</td><td>39.48</td><td>14.60</td></tr><tr><td>2</td><td>16650.00</td><td>49.05</td><td>68.30</td><td>-19.25</td><td>40.98</td><td>42.43</td><td>17.41</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	11100.00	47.01	74.00	-26.99	43.71	39.48	14.60	2	16650.00	49.05	68.30	-19.25	40.98	42.43	17.41	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>11100.00</td><td>46.77</td><td>74.00</td><td>-27.23</td><td>43.47</td><td>39.48</td><td>14.60</td></tr><tr><td>2</td><td>16650.00</td><td>48.19</td><td>68.30</td><td>-20.11</td><td>40.12</td><td>42.43</td><td>17.41</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	11100.00	46.77	74.00	-27.23	43.47	39.48	14.60	2	16650.00	48.19	68.30	-20.11	40.12	42.43	17.41
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	11100.00	47.01	74.00	-26.99	43.71	39.48	14.60																																																																																									
2	16650.00	49.05	68.30	-19.25	40.98	42.43	17.41																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	11100.00	46.77	74.00	-27.23	43.47	39.48	14.60																																																																																									
2	16650.00	48.19	68.30	-20.11	40.12	42.43	17.41																																																																																									
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>11100.00</td><td>47.01</td><td>74.00</td><td>-26.99</td><td>43.71</td><td>39.48</td><td>14.60</td></tr><tr><td>2</td><td>16650.00</td><td>49.05</td><td>68.30</td><td>-19.25</td><td>40.98</td><td>42.43</td><td>17.41</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	11100.00	47.01	74.00	-26.99	43.71	39.48	14.60	2	16650.00	49.05	68.30	-19.25	40.98	42.43	17.41	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>11100.00</td><td>46.77</td><td>74.00</td><td>-27.23</td><td>43.47</td><td>39.48</td><td>14.60</td></tr><tr><td>2</td><td>16650.00</td><td>48.19</td><td>68.30</td><td>-20.11</td><td>40.12</td><td>42.43</td><td>17.41</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	11100.00	46.77	74.00	-27.23	43.47	39.48	14.60	2	16650.00	48.19	68.30	-20.11	40.12	42.43	17.41	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	11100.00	47.01	74.00	-26.99	43.71	39.48	14.60																																																																																									
2	16650.00	49.05	68.30	-19.25	40.98	42.43	17.41																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	11100.00	46.77	74.00	-27.23	43.47	39.48	14.60																																																																																									
2	16650.00	48.19	68.30	-20.11	40.12	42.43	17.41																																																																																									



Mode	25										
	Band Edge - L										
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz										
ANT	1										
Pol.	Horizontal										
Peak	Fundamental										







Mode	25																																																					
	Band Edge - L																																																					
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																																					
ANT	1																																																					
Pol.	Vertical																																																					
Peak	Fundamental																																																					
	Date: 2024-09-14																																																					
	<table><thead><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5356.88</td><td>52.45</td><td>74.00</td><td>-21.55</td><td>38.72</td><td>34.83</td><td>10.94</td><td>32.04</td><td>377</td><td>0 PEAK</td></tr><tr><td>2</td><td>5468.27</td><td>51.56</td><td>68.30</td><td>-16.74</td><td>37.78</td><td>34.81</td><td>11.15</td><td>32.18</td><td>377</td><td>0 PEAK</td></tr></tbody></table>											Freq	Level	Line	(dB)	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg		1	5356.88	52.45	74.00	-21.55	38.72	34.83	10.94	32.04	377	0 PEAK	2	5468.27	51.56	68.30	-16.74	37.78	34.81	11.15	32.18	377
Freq	Level	Line	(dB)	Read	Ant	Cable	Preamp	APos	TPos	Remark																																												
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																													
1	5356.88	52.45	74.00	-21.55	38.72	34.83	10.94	32.04	377	0 PEAK																																												
2	5468.27	51.56	68.30	-16.74	37.78	34.81	11.15	32.18	377	0 PEAK																																												
Avg	Date: 2024-09-14																																																					
	<table><thead><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5458.96</td><td>41.28</td><td>54.00</td><td>-12.72</td><td>27.51</td><td>34.81</td><td>11.12</td><td>32.16</td><td>377</td><td>0 AVERAGE</td></tr></tbody></table>											Freq	Level	Line	(dB)	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg		1	5458.96	41.28	54.00	-12.72	27.51	34.81	11.12	32.16	377	0 AVERAGE										
	Freq	Level	Line	(dB)	Read	Ant	Cable	Preamp	APos	TPos	Remark																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																													
1	5458.96	41.28	54.00	-12.72	27.51	34.81	11.12	32.16	377	0 AVERAGE																																												
Peak	Date: 2024-09-14																																																					
	<table><thead><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5670.00</td><td>96.89</td><td>-----</td><td>82.52</td><td>35.01</td><td>11.69</td><td>32.33</td><td>377</td><td>0</td><td>PEAK</td></tr></tbody></table>											Freq	Level	Line	(dB)	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg		1	5670.00	96.89	-----	82.52	35.01	11.69	32.33	377	0	PEAK										
	Freq	Level	Line	(dB)	Read	Ant	Cable	Preamp	APos	TPos	Remark																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																													
1	5670.00	96.89	-----	82.52	35.01	11.69	32.33	377	0	PEAK																																												
Avg	Date: 2024-09-14																																																					
	<table><thead><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5670.00</td><td>90.23</td><td>-----</td><td>75.86</td><td>35.01</td><td>11.69</td><td>32.33</td><td>377</td><td>0</td><td>AVERAGE</td></tr></tbody></table>											Freq	Level	Line	(dB)	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg		1	5670.00	90.23	-----	75.86	35.01	11.69	32.33	377	0	AVERAGE										
	Freq	Level	Line	(dB)	Read	Ant	Cable	Preamp	APos	TPos	Remark																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																													
1	5670.00	90.23	-----	75.86	35.01	11.69	32.33	377	0	AVERAGE																																												







Mode	25																																																																																															
	Harmonic																																																																																															
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																																																																															
ANT	1																																																																																															
Pol.	Horizontal								Vertical																																																																																							
Peak Avg	Date: 2024-09-18								Date: 2024-09-18																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>11340.00</td><td>48.04</td><td>74.00</td><td>-25.96</td><td>44.36</td><td>39.67</td><td>14.74</td></tr><tr><td>2</td><td>17010.00</td><td>47.34</td><td>68.30</td><td>-20.96</td><td>39.04</td><td>42.50</td><td>17.51</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	11340.00	48.04	74.00	-25.96	44.36	39.67	14.74	2	17010.00	47.34	68.30	-20.96	39.04	42.50	17.51	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>11340.00</td><td>48.20</td><td>74.00</td><td>-25.80</td><td>44.52</td><td>39.67</td><td>14.74</td></tr><tr><td>2</td><td>17010.00</td><td>47.64</td><td>68.30</td><td>-20.66</td><td>39.34</td><td>42.50</td><td>17.51</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	11340.00	48.20	74.00	-25.80	44.52	39.67	14.74	2	17010.00	47.64	68.30	-20.66	39.34	42.50	17.51
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	11340.00	48.04	74.00	-25.96	44.36	39.67	14.74																																																																																									
2	17010.00	47.34	68.30	-20.96	39.04	42.50	17.51																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	11340.00	48.20	74.00	-25.80	44.52	39.67	14.74																																																																																									
2	17010.00	47.64	68.30	-20.66	39.34	42.50	17.51																																																																																									
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>11340.00</td><td>48.04</td><td>74.00</td><td>-25.96</td><td>44.36</td><td>39.67</td><td>14.74</td></tr><tr><td>2</td><td>17010.00</td><td>47.34</td><td>68.30</td><td>-20.96</td><td>39.04</td><td>42.50</td><td>17.51</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	11340.00	48.04	74.00	-25.96	44.36	39.67	14.74	2	17010.00	47.34	68.30	-20.96	39.04	42.50	17.51	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>11340.00</td><td>48.20</td><td>74.00</td><td>-25.80</td><td>44.52</td><td>39.67</td><td>14.74</td></tr><tr><td>2</td><td>17010.00</td><td>47.64</td><td>68.30</td><td>-20.66</td><td>39.34</td><td>42.50</td><td>17.51</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	11340.00	48.20	74.00	-25.80	44.52	39.67	14.74	2	17010.00	47.64	68.30	-20.66	39.34	42.50	17.51	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	11340.00	48.04	74.00	-25.96	44.36	39.67	14.74																																																																																									
2	17010.00	47.34	68.30	-20.96	39.04	42.50	17.51																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	11340.00	48.20	74.00	-25.80	44.52	39.67	14.74																																																																																									
2	17010.00	47.64	68.30	-20.66	39.34	42.50	17.51																																																																																									
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>11340.00</td><td>48.04</td><td>74.00</td><td>-25.96</td><td>44.36</td><td>39.67</td><td>14.74</td></tr><tr><td>2</td><td>17010.00</td><td>47.34</td><td>68.30</td><td>-20.96</td><td>39.04</td><td>42.50</td><td>17.51</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	11340.00	48.04	74.00	-25.96	44.36	39.67	14.74	2	17010.00	47.34	68.30	-20.96	39.04	42.50	17.51	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>11340.00</td><td>48.20</td><td>74.00</td><td>-25.80</td><td>44.52</td><td>39.67</td><td>14.74</td></tr><tr><td>2</td><td>17010.00</td><td>47.64</td><td>68.30</td><td>-20.66</td><td>39.34</td><td>42.50</td><td>17.51</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	11340.00	48.20	74.00	-25.80	44.52	39.67	14.74	2	17010.00	47.64	68.30	-20.66	39.34	42.50	17.51	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	11340.00	48.04	74.00	-25.96	44.36	39.67	14.74																																																																																									
2	17010.00	47.34	68.30	-20.96	39.04	42.50	17.51																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	11340.00	48.20	74.00	-25.80	44.52	39.67	14.74																																																																																									
2	17010.00	47.64	68.30	-20.66	39.34	42.50	17.51																																																																																									

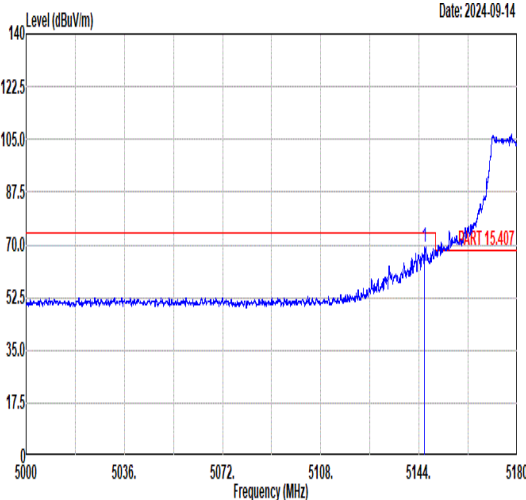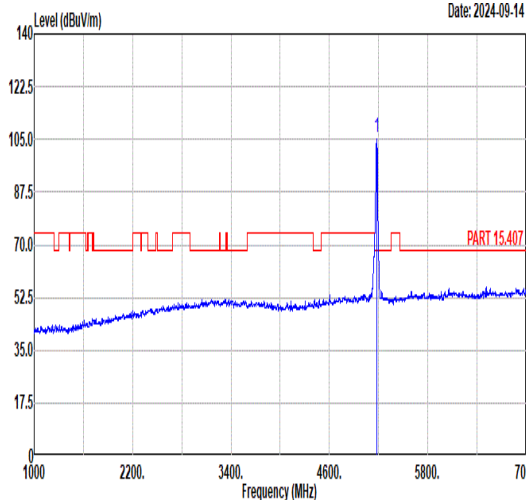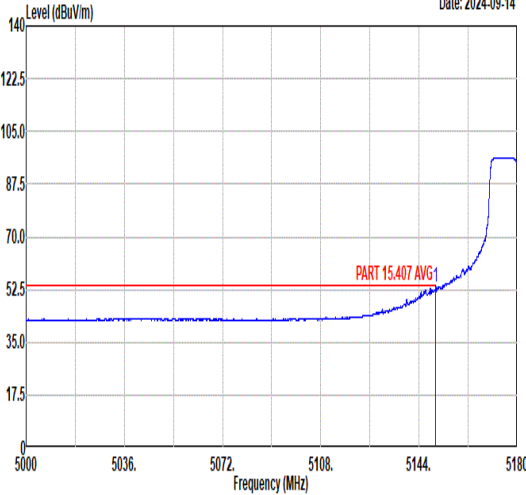
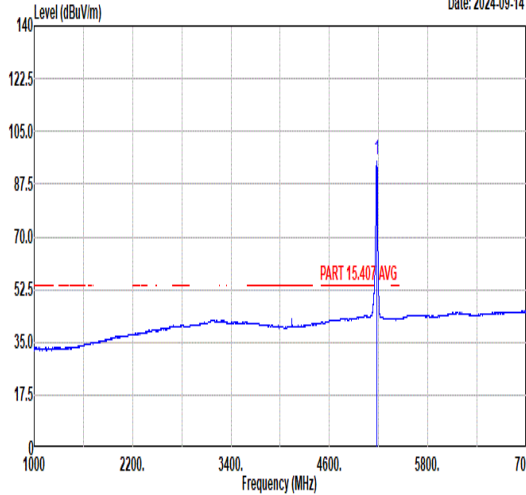


Mode	26																																																																																
	Band Edge																																																																																
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_5180MHz																																																																																
ANT	1																																																																																
Pol.	Horizontal					Fundamental																																																																											
Peak																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5146.09</td><td>69.10</td><td>74.00</td><td>-4.90</td><td>54.92</td><td>34.87</td><td>11.09</td><td>31.78</td><td>394 93 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5146.09	69.10	74.00	-4.90	54.92	34.87	11.09	31.78	394 93 PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5180.00</td><td>105.80</td><td>-----</td><td>-----</td><td>91.67</td><td>34.87</td><td>11.07</td><td>31.81</td><td>394 93 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5180.00	105.80	-----	-----	91.67	34.87	11.07	31.81
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																									
1 5146.09	69.10	74.00	-4.90	54.92	34.87	11.09	31.78	394 93 PEAK																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																									
1 5180.00	105.80	-----	-----	91.67	34.87	11.07	31.81	394 93 PEAK																																																																									
Avg																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5149.99</td><td>53.30</td><td>54.00</td><td>-0.70</td><td>39.13</td><td>34.87</td><td>11.08</td><td>31.78</td><td>394 93 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5149.99	53.30	54.00	-0.70	39.13	34.87	11.08	31.78	394 93 AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5180.00</td><td>95.78</td><td>-----</td><td>-----</td><td>81.65</td><td>34.87</td><td>11.07</td><td>31.81</td><td>394 93 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5180.00	95.78	-----	-----	81.65	34.87	11.07	31.81
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																									
1 5149.99	53.30	54.00	-0.70	39.13	34.87	11.08	31.78	394 93 AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																									
1 5180.00	95.78	-----	-----	81.65	34.87	11.07	31.81	394 93 AVERAGE																																																																									

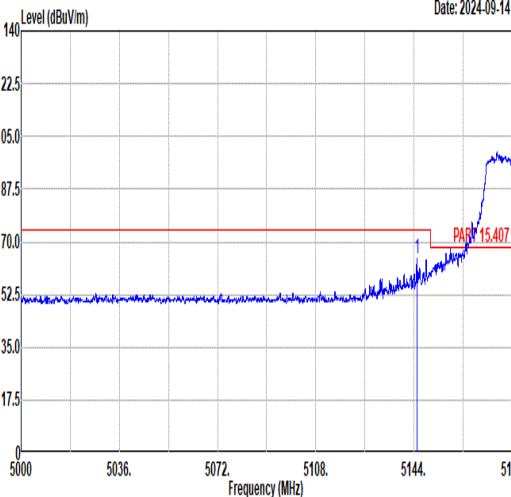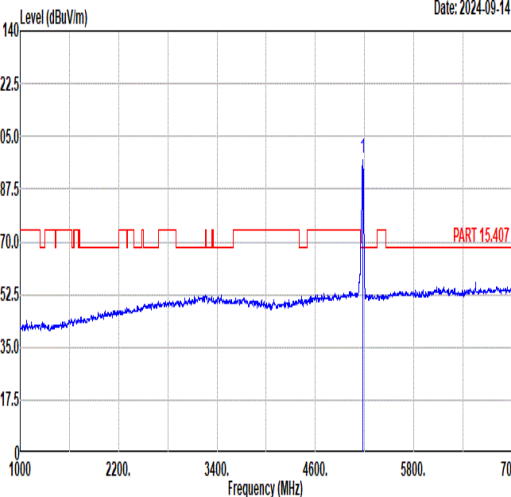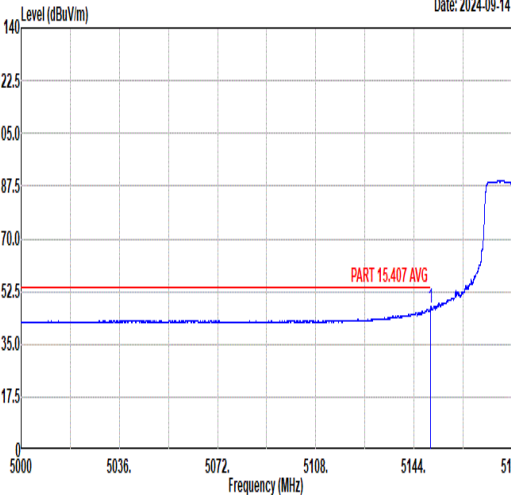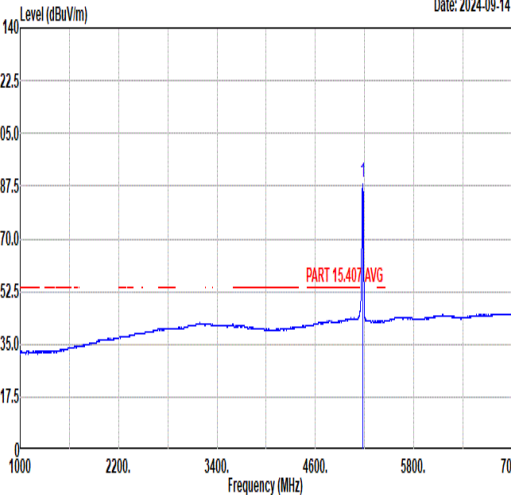

Mode	26																																																																																									
	Band Edge																																																																																									
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_5180MHz																																																																																									
ANT	1																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5145.01</td><td>64.37</td><td>74.00</td><td>-9.63</td><td>50.19</td><td>34.87</td><td>11.09</td><td>31.78</td><td>400</td><td>164</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5145.01	64.37	74.00	-9.63	50.19	34.87	11.09	31.78	400	164	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>97.73</td><td>-----</td><td>-----</td><td>83.62</td><td>34.86</td><td>11.07</td><td>31.82</td><td>400</td><td>164</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	97.73	-----	-----	83.62	34.86	11.07	31.82	400	164
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5145.01	64.37	74.00	-9.63	50.19	34.87	11.09	31.78	400	164	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5180.00	97.73	-----	-----	83.62	34.86	11.07	31.82	400	164	PEAK																																																																															
Avg																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.99</td><td>47.16</td><td>54.00</td><td>-6.84</td><td>32.99</td><td>34.87</td><td>11.08</td><td>31.78</td><td>400</td><td>164</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.99	47.16	54.00	-6.84	32.99	34.87	11.08	31.78	400	164	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>88.63</td><td>-----</td><td>-----</td><td>74.50</td><td>34.87</td><td>11.07</td><td>31.81</td><td>400</td><td>164</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	88.63	-----	-----	74.50	34.87	11.07	31.81	400	164
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5149.99	47.16	54.00	-6.84	32.99	34.87	11.08	31.78	400	164	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5180.00	88.63	-----	-----	74.50	34.87	11.07	31.81	400	164	AVERAGE																																																																															

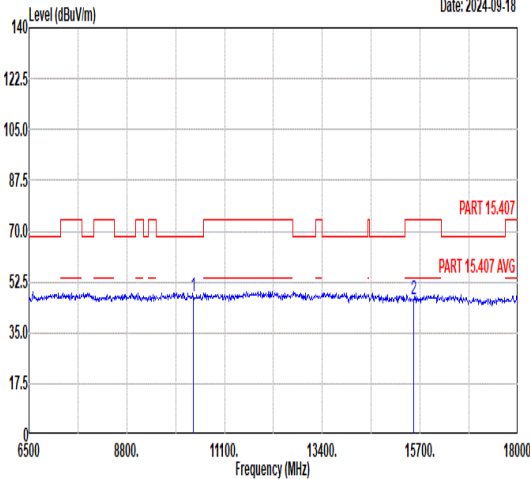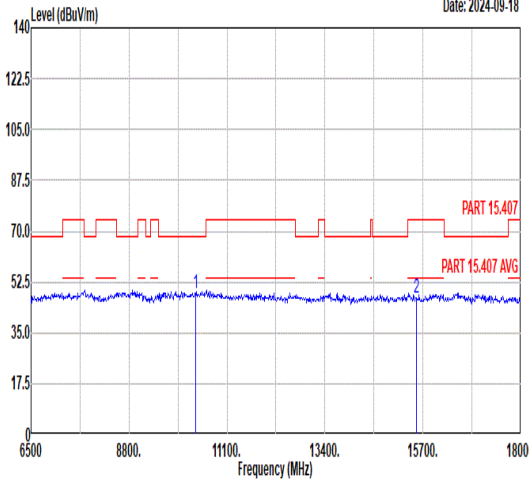

Mode	26																																																																																														
	Harmonic																																																																																														
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_5180MHz																																																																																														
ANT	1																																																																																														
Pol.	Horizontal					Vertical																																																																																									
Peak Avg																																																																																															
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>10360.00</td><td>47.74</td><td>68.30</td><td>-20.56</td><td>44.92</td><td>39.44</td><td>14.15</td><td>50.77</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>46.62</td><td>74.00</td><td>-27.38</td><td>39.38</td><td>41.82</td><td>16.85</td><td>51.43</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	1	10360.00	47.74	68.30	-20.56	44.92	39.44	14.15	50.77	---	---	Peak	2	15540.00	46.62	74.00	-27.38	39.38	41.82	16.85	51.43	---	---	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>10360.00</td><td>48.83</td><td>68.30</td><td>-19.47</td><td>46.01</td><td>39.44</td><td>14.15</td><td>50.77</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>47.20</td><td>74.00</td><td>-26.80</td><td>39.96</td><td>41.82</td><td>16.85</td><td>51.43</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	1	10360.00	48.83	68.30	-19.47	46.01	39.44	14.15	50.77	---	---	Peak	2	15540.00	47.20	74.00	-26.80	39.96	41.82	16.85	51.43	---	---	Peak	
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
1	10360.00	47.74	68.30	-20.56	44.92	39.44	14.15	50.77	---	---	Peak																																																																																				
2	15540.00	46.62	74.00	-27.38	39.38	41.82	16.85	51.43	---	---	Peak																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
1	10360.00	48.83	68.30	-19.47	46.01	39.44	14.15	50.77	---	---	Peak																																																																																				
2	15540.00	47.20	74.00	-26.80	39.96	41.82	16.85	51.43	---	---	Peak																																																																																				
<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>10360.00</td><td>47.74</td><td>68.30</td><td>-20.56</td><td>44.92</td><td>39.44</td><td>14.15</td><td>50.77</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>46.62</td><td>74.00</td><td>-27.38</td><td>39.38</td><td>41.82</td><td>16.85</td><td>51.43</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	47.74	68.30	-20.56	44.92	39.44	14.15	50.77	---	---	Peak	2	15540.00	46.62	74.00	-27.38	39.38	41.82	16.85	51.43	---	---	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>10360.00</td><td>48.83</td><td>68.30</td><td>-19.47</td><td>46.01</td><td>39.44</td><td>14.15</td><td>50.77</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>47.20</td><td>74.00</td><td>-26.80</td><td>39.96</td><td>41.82</td><td>16.85</td><td>51.43</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	48.83	68.30	-19.47	46.01	39.44	14.15	50.77	---	---	Peak	2	15540.00	47.20	74.00	-26.80	39.96	41.82	16.85	51.43	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	10360.00	47.74	68.30	-20.56	44.92	39.44	14.15	50.77	---	---	Peak																																																																																				
2	15540.00	46.62	74.00	-27.38	39.38	41.82	16.85	51.43	---	---	Peak																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	10360.00	48.83	68.30	-19.47	46.01	39.44	14.15	50.77	---	---	Peak																																																																																				
2	15540.00	47.20	74.00	-26.80	39.96	41.82	16.85	51.43	---	---	Peak																																																																																				



Mode	27																																																																																																					
	Harmonic																																																																																																					
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_5220MHz																																																																																																					
ANT	1																																																																																																					
Pol.	Horizontal						Vertical																																																																																															
Peak Avg	Date: 2024-09-18						Date: 2024-09-18																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>10440.00</td><td>48.42</td><td>68.30</td><td>-19.88</td><td>45.53</td><td>39.48</td><td>14.20</td><td>50.79 --- --- Peak</td></tr><tr><td>2</td><td>15660.00</td><td>46.84</td><td>74.00</td><td>-27.16</td><td>39.53</td><td>41.90</td><td>16.94</td><td>51.53 --- --- Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	10440.00	48.42	68.30	-19.88	45.53	39.48	14.20	50.79 --- --- Peak	2	15660.00	46.84	74.00	-27.16	39.53	41.90	16.94	51.53 --- --- Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>10440.00</td><td>47.81</td><td>68.30</td><td>-20.49</td><td>44.92</td><td>39.48</td><td>14.20</td><td>50.79 --- --- Peak</td></tr><tr><td>2</td><td>15660.00</td><td>47.66</td><td>74.00</td><td>-26.34</td><td>40.35</td><td>41.90</td><td>16.94</td><td>51.53 --- --- Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	10440.00	47.81	68.30	-20.49	44.92	39.48	14.20	50.79 --- --- Peak	2	15660.00	47.66	74.00	-26.34	40.35	41.90	16.94	51.53 --- --- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1	10440.00	48.42	68.30	-19.88	45.53	39.48	14.20	50.79 --- --- Peak																																																																																														
2	15660.00	46.84	74.00	-27.16	39.53	41.90	16.94	51.53 --- --- Peak																																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1	10440.00	47.81	68.30	-20.49	44.92	39.48	14.20	50.79 --- --- Peak																																																																																														
2	15660.00	47.66	74.00	-26.34	40.35	41.90	16.94	51.53 --- --- Peak																																																																																														





Mode	28																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_5240MHz																																																																																																																			
ANT	1																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg	Date: 2024-09-18						Date: 2024-09-18																																																																																																													
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>10480.00</td><td>47.90</td><td>68.30</td><td>-20.40</td><td>44.98</td><td>39.49</td><td>14.23</td><td>50.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15720.00</td><td>47.21</td><td>74.00</td><td>-26.79</td><td>39.87</td><td>41.93</td><td>16.99</td><td>51.58</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10480.00	47.90	68.30	-20.40	44.98	39.49	14.23	50.80	---	---	Peak	2	15720.00	47.21	74.00	-26.79	39.87	41.93	16.99	51.58	---	---	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>10480.00</td><td>47.65</td><td>68.30</td><td>-20.65</td><td>44.73</td><td>39.49</td><td>14.23</td><td>50.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15720.00</td><td>47.54</td><td>74.00</td><td>-26.46</td><td>40.20</td><td>41.93</td><td>16.99</td><td>51.58</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10480.00	47.65	68.30	-20.65	44.73	39.49	14.23	50.80	---	---	Peak	2	15720.00	47.54	74.00	-26.46	40.20	41.93	16.99	51.58	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	10480.00	47.90	68.30	-20.40	44.98	39.49	14.23	50.80	---	---	Peak																																																																																																									
2	15720.00	47.21	74.00	-26.79	39.87	41.93	16.99	51.58	---	---	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	10480.00	47.65	68.30	-20.65	44.73	39.49	14.23	50.80	---	---	Peak																																																																																																									
2	15720.00	47.54	74.00	-26.46	40.20	41.93	16.99	51.58	---	---	Peak																																																																																																									



Mode	29																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_5280MHz																																																																																																																																	
ANT	1																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg	Level (dBuV/m) Date: 2024-09-18 Frequency (MHz)						Level (dBuV/m) Date: 2024-09-18 Frequency (MHz)																																																																																																																											
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10520.00</td><td>48.60</td><td>68.30</td><td>-19.70</td><td>45.65</td><td>39.50</td><td>14.25</td><td>50.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15780.00</td><td>47.50</td><td>74.00</td><td>-26.50</td><td>40.12</td><td>41.97</td><td>17.04</td><td>51.63</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10520.00	48.60	68.30	-19.70	45.65	39.50	14.25	50.80	---	---	Peak	2	15780.00	47.50	74.00	-26.50	40.12	41.97	17.04	51.63	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10520.00</td><td>48.91</td><td>68.30</td><td>-19.39</td><td>45.96</td><td>39.50</td><td>14.25</td><td>50.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15780.00</td><td>48.46</td><td>74.00</td><td>-25.54</td><td>41.08</td><td>41.97</td><td>17.04</td><td>51.63</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10520.00	48.91	68.30	-19.39	45.96	39.50	14.25	50.80	---	---	Peak	2	15780.00	48.46	74.00	-25.54	41.08	41.97	17.04	51.63	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10520.00	48.60	68.30	-19.70	45.65	39.50	14.25	50.80	---	---	Peak																																																																																																																							
2	15780.00	47.50	74.00	-26.50	40.12	41.97	17.04	51.63	---	---	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10520.00	48.91	68.30	-19.39	45.96	39.50	14.25	50.80	---	---	Peak																																																																																																																							
2	15780.00	48.46	74.00	-25.54	41.08	41.97	17.04	51.63	---	---	Peak																																																																																																																							



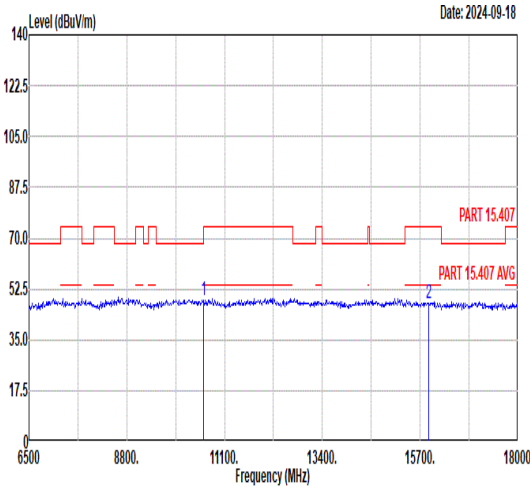
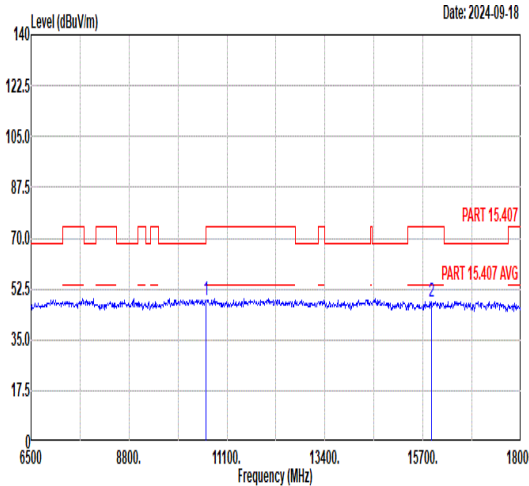


Mode	30																																																																																																				
	Harmonic																																																																																																				
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_5300MHz																																																																																																				
ANT	1																																																																																																				
Pol.	Horizontal						Vertical																																																																																														
Peak Avg																																																																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1 10600.00</td><td>48.62</td><td>74.00</td><td>-25.38</td><td>45.64</td><td>39.48</td><td>14.30</td><td>50.80</td><td>--- --- Peak</td></tr><tr><td>2 15900.00</td><td>47.48</td><td>74.00</td><td>-26.52</td><td>40.02</td><td>42.04</td><td>17.14</td><td>51.72</td><td>--- --- Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1 10600.00	48.62	74.00	-25.38	45.64	39.48	14.30	50.80	--- --- Peak	2 15900.00	47.48	74.00	-26.52	40.02	42.04	17.14	51.72	--- --- Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1 10600.00</td><td>48.74</td><td>74.00</td><td>-25.26</td><td>45.76</td><td>39.48</td><td>14.30</td><td>50.80</td><td>--- --- Peak</td></tr><tr><td>2 15900.00</td><td>47.83</td><td>74.00</td><td>-26.17</td><td>40.37</td><td>42.04</td><td>17.14</td><td>51.72</td><td>--- --- Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1 10600.00	48.74	74.00	-25.26	45.76	39.48	14.30	50.80	--- --- Peak	2 15900.00	47.83	74.00	-26.17	40.37	42.04	17.14	51.72	--- --- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																														
1 10600.00	48.62	74.00	-25.38	45.64	39.48	14.30	50.80	--- --- Peak																																																																																													
2 15900.00	47.48	74.00	-26.52	40.02	42.04	17.14	51.72	--- --- Peak																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																														
1 10600.00	48.74	74.00	-25.26	45.76	39.48	14.30	50.80	--- --- Peak																																																																																													
2 15900.00	47.83	74.00	-26.17	40.37	42.04	17.14	51.72	--- --- Peak																																																																																													



Mode	31																																																																																										
	Band Edge																																																																																										
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_5320MHz																																																																																										
ANT	1																																																																																										
Pol.	Horizontal						Fundamental																																																																																				
Peak	Date: 2024-09-15 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5351.58</td><td>66.27</td><td>74.00</td><td>-7.73</td><td>52.53</td><td>34.83</td><td>10.94</td><td>32.03</td><td>311</td><td>83</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5351.58	66.27	74.00	-7.73	52.53	34.83	10.94	32.03	311	83	PEAK	Date: 2024-09-14 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>107.21</td><td>-----</td><td>-----</td><td>93.41</td><td>34.84</td><td>10.96</td><td>32.00</td><td>311</td><td>83</td><td>PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5320.00	107.21	-----	-----	93.41	34.84	10.96	32.00	311	83	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5351.58	66.27	74.00	-7.73	52.53	34.83	10.94	32.03	311	83	PEAK																																																																																
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5320.00	107.21	-----	-----	93.41	34.84	10.96	32.00	311	83	PEAK																																																																																
Avg	Date: 2024-09-15 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.74</td><td>49.13</td><td>54.00</td><td>-4.87</td><td>35.39</td><td>34.83</td><td>10.94</td><td>32.03</td><td>311</td><td>83</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5350.74	49.13	54.00	-4.87	35.39	34.83	10.94	32.03	311	83	AVERAGE	Date: 2024-09-15 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>97.64</td><td>-----</td><td>-----</td><td>83.82</td><td>34.84</td><td>10.97</td><td>31.99</td><td>311</td><td>83</td><td>AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5320.00	97.64	-----	-----	83.82	34.84	10.97	31.99	311	83	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5350.74	49.13	54.00	-4.87	35.39	34.83	10.94	32.03	311	83	AVERAGE																																																																																
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5320.00	97.64	-----	-----	83.82	34.84	10.97	31.99	311	83	AVERAGE																																																																																

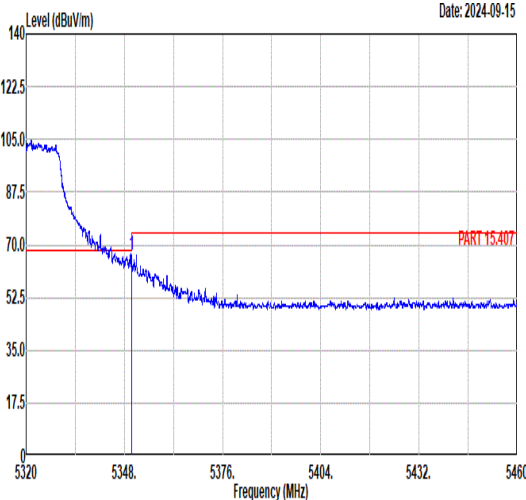
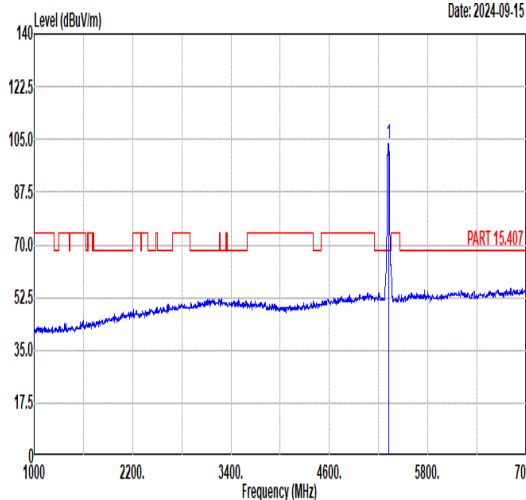
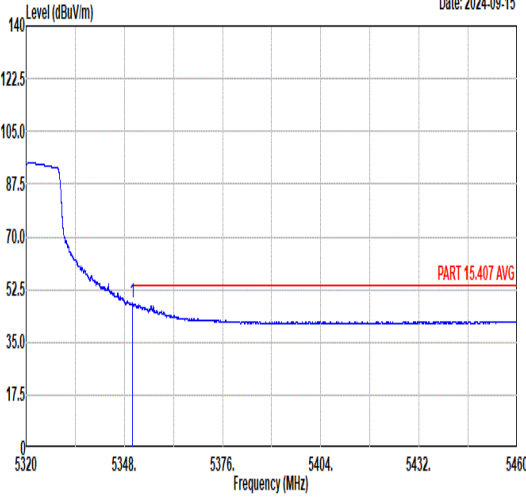
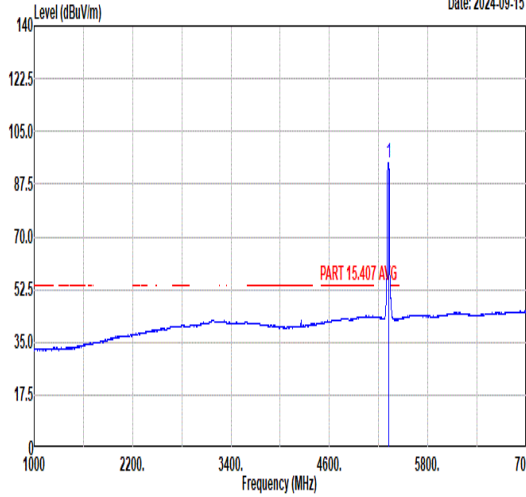


Mode	31																																																																																	
	Band Edge																																																																																	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_5320MHz																																																																																	
ANT	1																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2024-09-15  5320 5348. 5376. 5404. 5432. 5460 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.00</td><td>66.52</td><td>74.00</td><td>-7.48</td><td>52.78</td><td>34.83</td><td>10.94</td><td>32.03</td><td>400</td><td>347</td><td>PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5350.00	66.52	74.00	-7.48	52.78	34.83	10.94	32.03	400	347	PEAK	Level (dBuV/m) Date: 2024-09-15  1000 2200. 3400. 4600. 5800. 7000 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>103.59</td><td>-----</td><td>-----</td><td>89.77</td><td>34.84</td><td>10.97</td><td>31.99</td><td>400</td><td>347</td><td>PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5320.00	103.59	-----	-----	89.77	34.84	10.97	31.99	400	347	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5350.00	66.52	74.00	-7.48	52.78	34.83	10.94	32.03	400	347	PEAK																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5320.00	103.59	-----	-----	89.77	34.84	10.97	31.99	400	347	PEAK																																																																							
Avg	Level (dBuV/m) Date: 2024-09-15  5320 5348. 5376. 5404. 5432. 5460 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.31</td><td>48.01</td><td>54.00</td><td>-5.99</td><td>34.27</td><td>34.83</td><td>10.94</td><td>32.03</td><td>400</td><td>347</td><td>AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5350.31	48.01	54.00	-5.99	34.27	34.83	10.94	32.03	400	347	AVERAGE	Level (dBuV/m) Date: 2024-09-15  1000 2200. 3400. 4600. 5800. 7000 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>94.49</td><td>-----</td><td>-----</td><td>80.67</td><td>34.84</td><td>10.97</td><td>31.99</td><td>400</td><td>347</td><td>AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5320.00	94.49	-----	-----	80.67	34.84	10.97	31.99	400	347	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5350.31	48.01	54.00	-5.99	34.27	34.83	10.94	32.03	400	347	AVERAGE																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5320.00	94.49	-----	-----	80.67	34.84	10.97	31.99	400	347	AVERAGE																																																																							







Mode	31																																																																																																																				
	Harmonic																																																																																																																				
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_5320MHz																																																																																																																				
ANT	1																																																																																																																				
Pol.	Horizontal						Vertical																																																																																																														
Peak Avg	Level (dBuV/m) Date: 2024-09-18 Frequency (MHz)						Level (dBuV/m) Date: 2024-09-18 Frequency (MHz)																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10640.00</td><td>48.98</td><td>74.00</td><td>-25.02</td><td>45.99</td><td>39.47</td><td>14.32</td><td>50.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15960.00</td><td>47.21</td><td>74.00</td><td>-26.79</td><td>39.71</td><td>42.08</td><td>17.19</td><td>51.77</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10640.00	48.98	74.00	-25.02	45.99	39.47	14.32	50.80	---	---	Peak	2	15960.00	47.21	74.00	-26.79	39.71	42.08	17.19	51.77	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10640.00</td><td>47.46</td><td>74.00</td><td>-26.54</td><td>44.47</td><td>39.47</td><td>14.32</td><td>50.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15960.00</td><td>47.12</td><td>74.00</td><td>-26.88</td><td>39.62</td><td>42.08</td><td>17.19</td><td>51.77</td><td>---</td><td>---</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10640.00	47.46	74.00	-26.54	44.47	39.47	14.32	50.80	---	---	Peak	2	15960.00	47.12	74.00	-26.88	39.62	42.08	17.19	51.77	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	10640.00	48.98	74.00	-25.02	45.99	39.47	14.32	50.80	---	---	Peak																																																																																																										
2	15960.00	47.21	74.00	-26.79	39.71	42.08	17.19	51.77	---	---	Peak																																																																																																										
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	10640.00	47.46	74.00	-26.54	44.47	39.47	14.32	50.80	---	---	Peak																																																																																																										
2	15960.00	47.12	74.00	-26.88	39.62	42.08	17.19	51.77	---	---	Peak																																																																																																										

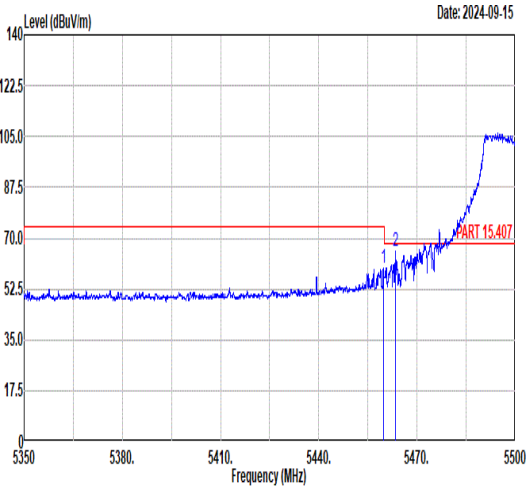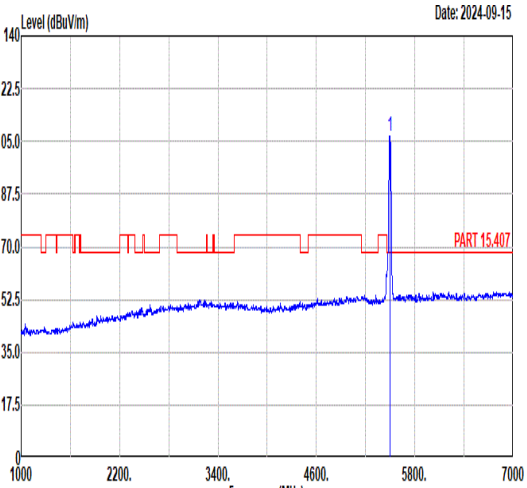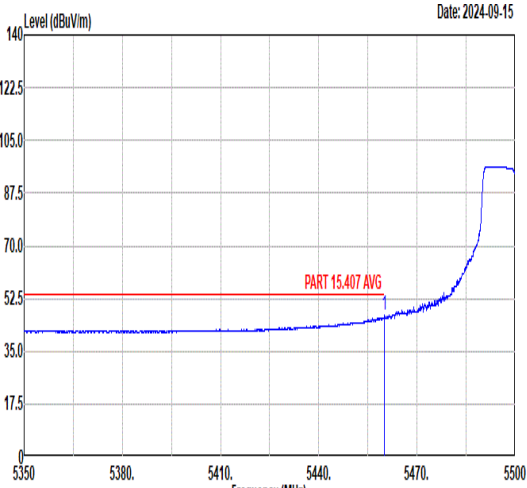
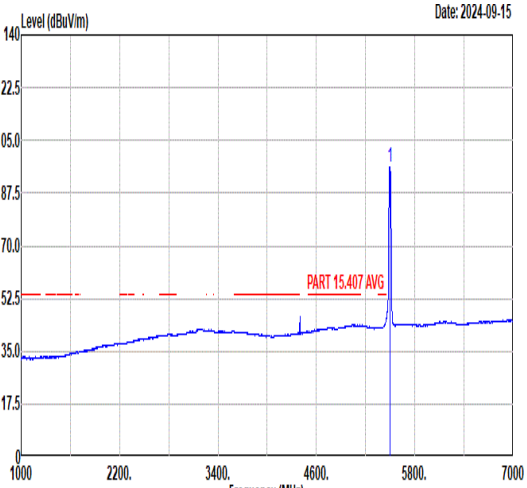


Mode	32																																																																																																		
	Band Edge																																																																																																		
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_5500MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal					Fundamental																																																																																													
Peak																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.73</td><td>59.68</td><td>74.00</td><td>-14.32</td><td>45.91</td><td>34.81</td><td>11.12</td><td>32.16</td><td>385 70 PEAK</td></tr><tr><td>2</td><td>5463.48</td><td>65.38</td><td>68.30</td><td>-2.92</td><td>51.61</td><td>34.81</td><td>11.13</td><td>32.17</td><td>385 70 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5459.73	59.68	74.00	-14.32	45.91	34.81	11.12	32.16	385 70 PEAK	2	5463.48	65.38	68.30	-2.92	51.61	34.81	11.13	32.17	385 70 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>106.77</td><td>-----</td><td>92.92</td><td>34.80</td><td>11.25</td><td>32.20</td><td>385</td><td>70 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	106.77	-----	92.92	34.80	11.25	32.20	385
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5459.73	59.68	74.00	-14.32	45.91	34.81	11.12	32.16	385 70 PEAK																																																																																										
2	5463.48	65.38	68.30	-2.92	51.61	34.81	11.13	32.17	385 70 PEAK																																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5500.00	106.77	-----	92.92	34.80	11.25	32.20	385	70 PEAK																																																																																										
Avg																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>46.90</td><td>54.00</td><td>-7.10</td><td>33.14</td><td>34.81</td><td>11.12</td><td>32.17</td><td>385 70 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5460.00	46.90	54.00	-7.10	33.14	34.81	11.12	32.17	385 70 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>96.22</td><td>-----</td><td>82.37</td><td>34.80</td><td>11.25</td><td>32.20</td><td>385</td><td>70 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	96.22	-----	82.37	34.80	11.25	32.20	385	70 AVERAGE									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5460.00	46.90	54.00	-7.10	33.14	34.81	11.12	32.17	385 70 AVERAGE																																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5500.00	96.22	-----	82.37	34.80	11.25	32.20	385	70 AVERAGE																																																																																										

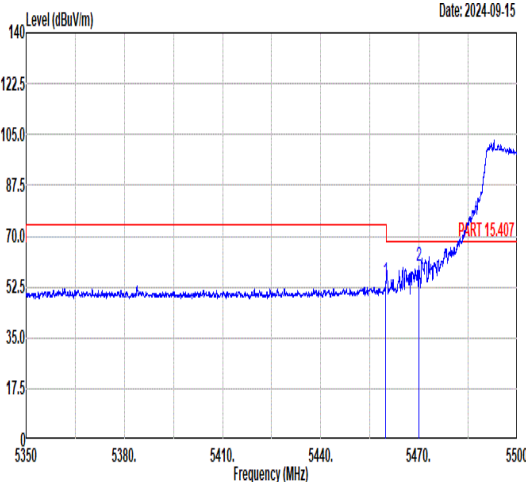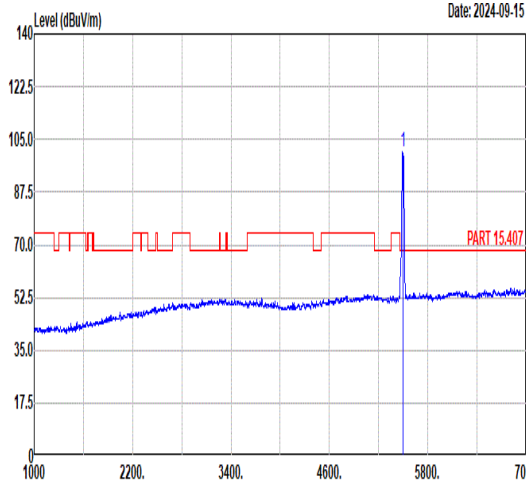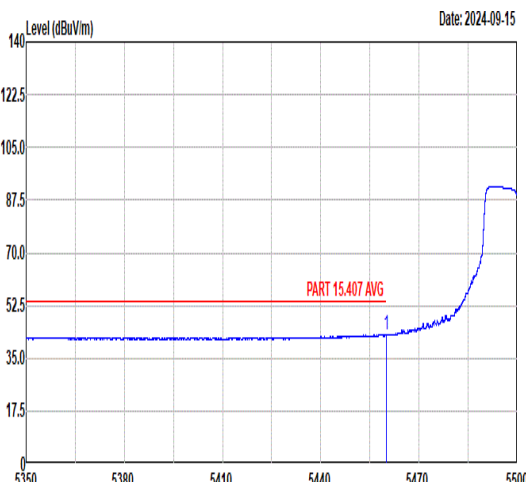
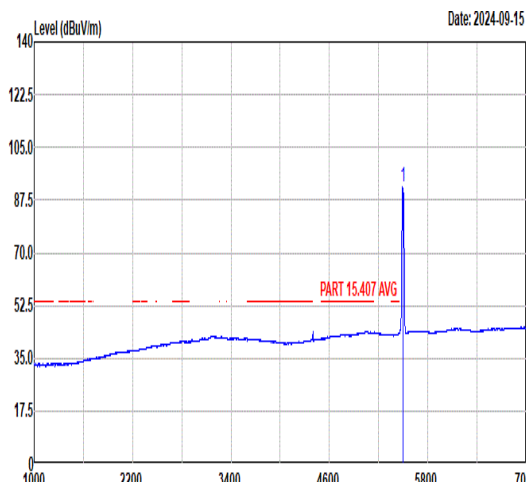


Mode	32																																																																																																		
	Band Edge																																																																																																		
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_5500MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Vertical					Fundamental																																																																																													
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.89</td><td>54.58</td><td>74.00</td><td>-19.42</td><td>40.82</td><td>34.81</td><td>11.12</td><td>32.17</td><td>400 359 PEAK</td></tr><tr><td>2</td><td>5469.93</td><td>59.61</td><td>68.30</td><td>-8.69</td><td>45.82</td><td>34.81</td><td>11.16</td><td>32.18</td><td>400 359 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5459.89	54.58	74.00	-19.42	40.82	34.81	11.12	32.17	400 359 PEAK	2	5469.93	59.61	68.30	-8.69	45.82	34.81	11.16	32.18	400 359 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5500.00</td><td>100.84</td><td>-----</td><td>86.99</td><td>34.80</td><td>11.25</td><td>32.20</td><td>400</td><td>359 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	100.84	-----	86.99	34.80	11.25	32.20	400
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5459.89	54.58	74.00	-19.42	40.82	34.81	11.12	32.17	400 359 PEAK																																																																																										
2	5469.93	59.61	68.30	-8.69	45.82	34.81	11.16	32.18	400 359 PEAK																																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5500.00	100.84	-----	86.99	34.80	11.25	32.20	400	359 PEAK																																																																																										
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5460.00</td><td>42.88</td><td>54.00</td><td>-11.12</td><td>29.12</td><td>34.81</td><td>11.12</td><td>32.17</td><td>400 359 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5460.00	42.88	54.00	-11.12	29.12	34.81	11.12	32.17	400 359 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5500.00</td><td>91.68</td><td>-----</td><td>77.83</td><td>34.80</td><td>11.25</td><td>32.20</td><td>400</td><td>359 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	91.68	-----	77.83	34.80	11.25	32.20	400	359 AVERAGE									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5460.00	42.88	54.00	-11.12	29.12	34.81	11.12	32.17	400 359 AVERAGE																																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5500.00	91.68	-----	77.83	34.80	11.25	32.20	400	359 AVERAGE																																																																																										

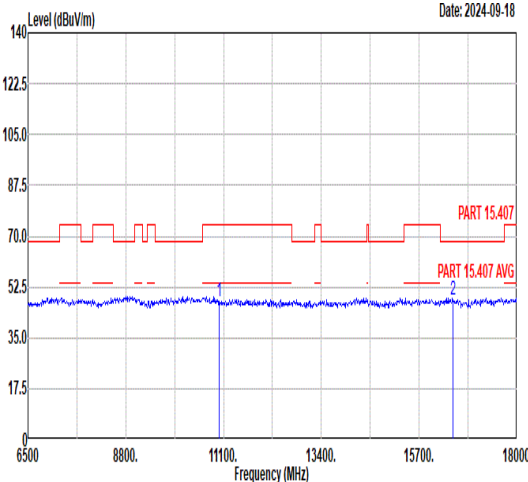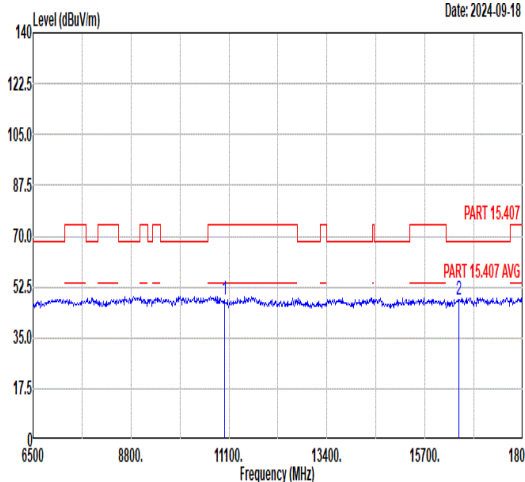

Mode	32																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_5500MHz																																																																																																																																	
ANT	1																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11000.00</td><td>47.44</td><td>74.00</td><td>-26.56</td><td>44.30</td><td>39.40</td><td>14.54</td><td>50.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>16500.00</td><td>48.00</td><td>68.30</td><td>-20.30</td><td>40.04</td><td>42.40</td><td>17.36</td><td>51.80</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11000.00	47.44	74.00	-26.56	44.30	39.40	14.54	50.80	---	---	Peak	2	16500.00	48.00	68.30	-20.30	40.04	42.40	17.36	51.80	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11000.00</td><td>47.94</td><td>74.00</td><td>-26.06</td><td>44.80</td><td>39.40</td><td>14.54</td><td>50.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>16500.00</td><td>48.18</td><td>68.30</td><td>-20.12</td><td>40.22</td><td>42.40</td><td>17.36</td><td>51.80</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11000.00	47.94	74.00	-26.06	44.80	39.40	14.54	50.80	---	---	Peak	2	16500.00	48.18	68.30	-20.12	40.22	42.40	17.36	51.80	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11000.00	47.44	74.00	-26.56	44.30	39.40	14.54	50.80	---	---	Peak																																																																																																																							
2	16500.00	48.00	68.30	-20.30	40.04	42.40	17.36	51.80	---	---	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11000.00	47.94	74.00	-26.06	44.80	39.40	14.54	50.80	---	---	Peak																																																																																																																							
2	16500.00	48.18	68.30	-20.12	40.22	42.40	17.36	51.80	---	---	Peak																																																																																																																							


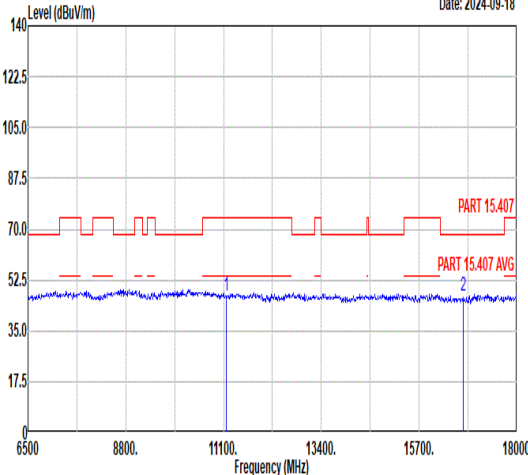
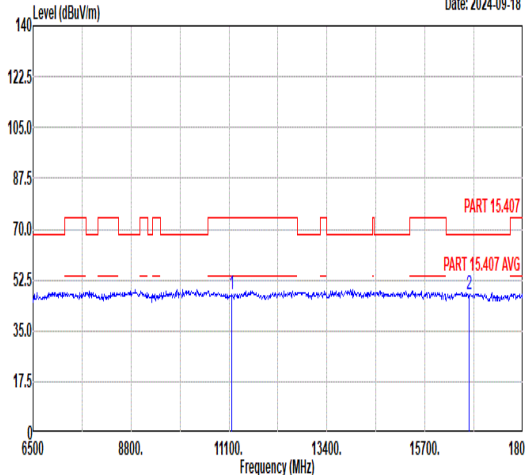


Mode	33																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_5580MHz																																																																																																																																	
ANT	1																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11160.00</td><td>47.09</td><td>74.00</td><td>-26.91</td><td>43.69</td><td>39.53</td><td>14.64</td><td>50.77</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>16740.00</td><td>46.90</td><td>68.30</td><td>-21.40</td><td>38.77</td><td>42.45</td><td>17.43</td><td>51.75</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11160.00	47.09	74.00	-26.91	43.69	39.53	14.64	50.77	---	---	Peak	2	16740.00	46.90	68.30	-21.40	38.77	42.45	17.43	51.75	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11160.00</td><td>47.34</td><td>74.00</td><td>-26.66</td><td>43.94</td><td>39.53</td><td>14.64</td><td>50.77</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>16740.00</td><td>47.50</td><td>68.30</td><td>-20.80</td><td>39.37</td><td>42.45</td><td>17.43</td><td>51.75</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11160.00	47.34	74.00	-26.66	43.94	39.53	14.64	50.77	---	---	Peak	2	16740.00	47.50	68.30	-20.80	39.37	42.45	17.43	51.75	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11160.00	47.09	74.00	-26.91	43.69	39.53	14.64	50.77	---	---	Peak																																																																																																																							
2	16740.00	46.90	68.30	-21.40	38.77	42.45	17.43	51.75	---	---	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11160.00	47.34	74.00	-26.66	43.94	39.53	14.64	50.77	---	---	Peak																																																																																																																							
2	16740.00	47.50	68.30	-20.80	39.37	42.45	17.43	51.75	---	---	Peak																																																																																																																							



Mode	34																																																																																	
	Band Edge																																																																																	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_5700MHz																																																																																	
ANT	1																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2024-09-15 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5725.65</td><td>66.67</td><td>68.30</td><td>-1.63</td><td>52.29</td><td>35.12</td><td>11.65</td><td>32.39</td><td>387</td><td>75 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5725.65	66.67	68.30	-1.63	52.29	35.12	11.65	32.39	387	75 PEAK	Level (dBuV/m) Date: 2024-09-15 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5700.00</td><td>106.83</td><td>-----</td><td>-----</td><td>92.46</td><td>35.08</td><td>11.66</td><td>32.37</td><td>387</td><td>75 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5700.00	106.83	-----	-----	92.46	35.08	11.66	32.37	387	75 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5725.65	66.67	68.30	-1.63	52.29	35.12	11.65	32.39	387	75 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5700.00	106.83	-----	-----	92.46	35.08	11.66	32.37	387	75 PEAK																																																																									
Avg	Blank	Level (dBuV/m) Date: 2024-09-15 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5700.00</td><td>96.60</td><td>-----</td><td>-----</td><td>82.23</td><td>35.08</td><td>11.66</td><td>32.37</td><td>387</td><td>75 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5700.00	96.60	-----	-----	82.23	35.08	11.66	32.37	387	75 AVERAGE																																								
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5700.00	96.60	-----	-----	82.23	35.08	11.66	32.37	387	75 AVERAGE																																																																									


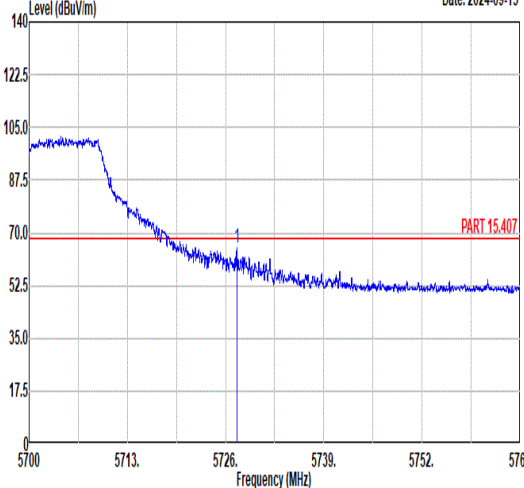
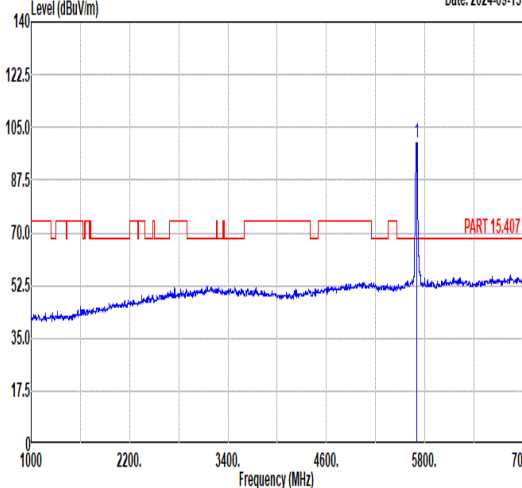
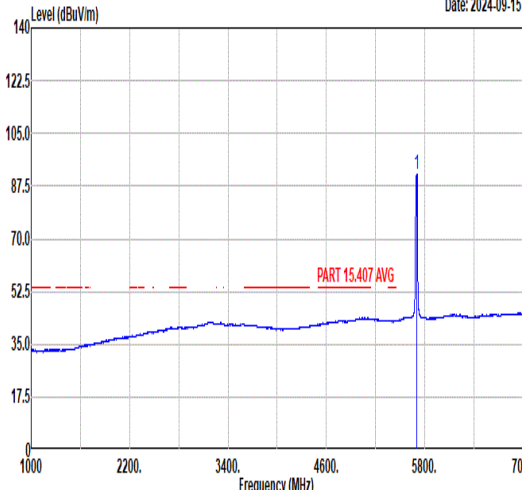


Mode	34																																																																																									
	Band Edge																																																																																									
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_5700MHz																																																																																									
ANT	1																																																																																									
Pol.	Vertical					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2024-09-15  Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5727.47</td><td>64.72</td><td>68.30</td><td>-3.58</td><td>50.34</td><td>35.12</td><td>11.65</td><td>32.39</td><td>325</td><td>358</td><td>PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5727.47	64.72	68.30	-3.58	50.34	35.12	11.65	32.39	325	358	PEAK	Level (dBuV/m) Date: 2024-09-15  Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>99.93</td><td>-----</td><td>-----</td><td>85.55</td><td>35.09</td><td>11.66</td><td>32.37</td><td>325</td><td>358</td><td>PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5700.00	99.93	-----	-----	85.55	35.09	11.66	32.37	325	358	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5727.47	64.72	68.30	-3.58	50.34	35.12	11.65	32.39	325	358	PEAK																																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5700.00	99.93	-----	-----	85.55	35.09	11.66	32.37	325	358	PEAK																																																																															
Avg	Blank					Level (dBuV/m) Date: 2024-09-15  Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>91.40</td><td>-----</td><td>-----</td><td>77.02</td><td>35.09</td><td>11.66</td><td>32.37</td><td>325</td><td>358</td><td>AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5700.00	91.40	-----	-----	77.02	35.09	11.66	32.37	325	358	AVERAGE																																								
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5700.00	91.40	-----	-----	77.02	35.09	11.66	32.37	325	358	AVERAGE																																																																															



Mode	34																																																																																																																							
	Harmonic																																																																																																																							
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_5700MHz																																																																																																																							
ANT	1																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																	
Peak Avg	Level (dBuV/m) Date: 2024-09-18 Frequency (MHz)						Level (dBuV/m) Date: 2024-09-18 Frequency (MHz)																																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11400.00</td><td>48.55</td><td>74.00</td><td>-25.45</td><td>44.77</td><td>39.72</td><td>14.78</td><td>50.72</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>17100.00</td><td>47.06</td><td>68.30</td><td>-21.24</td><td>38.87</td><td>42.46</td><td>17.53</td><td>51.80</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11400.00	48.55	74.00	-25.45	44.77	39.72	14.78	50.72	---	---	Peak	2	17100.00	47.06	68.30	-21.24	38.87	42.46	17.53	51.80	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11400.00</td><td>47.06</td><td>74.00</td><td>-26.94</td><td>43.28</td><td>39.72</td><td>14.78</td><td>50.72</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>17100.00</td><td>47.02</td><td>68.30</td><td>-21.28</td><td>38.83</td><td>42.46</td><td>17.53</td><td>51.80</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11400.00	47.06	74.00	-26.94	43.28	39.72	14.78	50.72	---	---	Peak	2	17100.00	47.02	68.30	-21.28	38.83	42.46	17.53	51.80	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	11400.00	48.55	74.00	-25.45	44.77	39.72	14.78	50.72	---	---	Peak																																																																																																													
2	17100.00	47.06	68.30	-21.24	38.87	42.46	17.53	51.80	---	---	Peak																																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	11400.00	47.06	74.00	-26.94	43.28	39.72	14.78	50.72	---	---	Peak																																																																																																													
2	17100.00	47.02	68.30	-21.28	38.83	42.46	17.53	51.80	---	---	Peak																																																																																																													

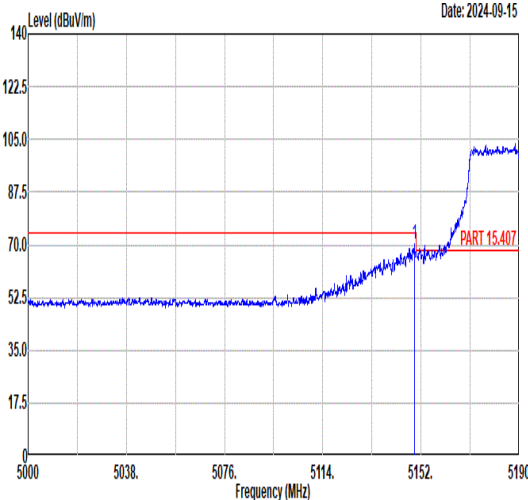
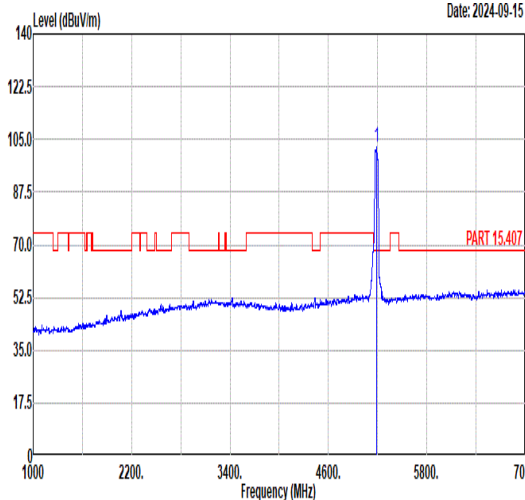
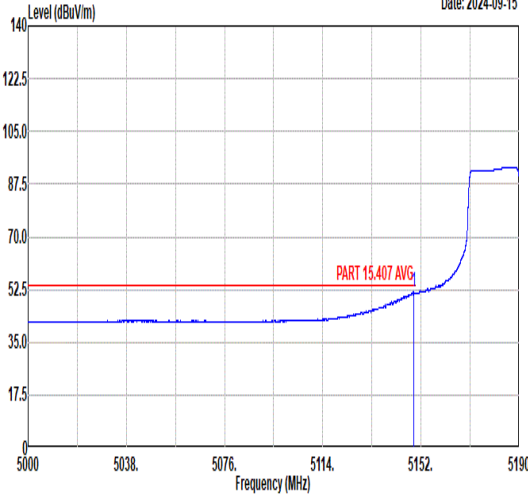
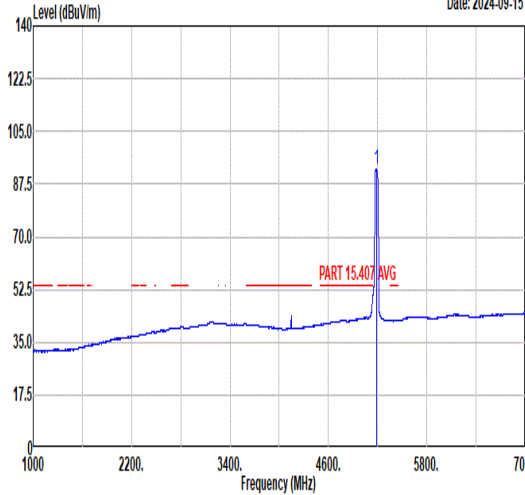


		35																																																																																							
Mode		Band Edge - L																																																																																							
		U-NII-1_5.15-5.25_802.11ax HE40_CH38_5190MHz																																																																																							
ANT		1																																																																																							
Pol.		Horizontal					Fundamental																																																																																		
Peak																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.44</td><td>70.24</td><td>74.00</td><td>-3.76</td><td>56.06</td><td>34.87</td><td>11.09</td><td>31.78</td><td>371 88 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5149.44	70.24	74.00	-3.76	56.06	34.87	11.09	31.78	371 88 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>102.54</td><td>-----</td><td>88.43</td><td>34.86</td><td>11.07</td><td>31.82</td><td>371</td><td>88 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5190.00	102.54	-----	88.43	34.86	11.07	31.82	371
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5149.44	70.24	74.00	-3.76	56.06	34.87	11.09	31.78	371 88 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5190.00	102.54	-----	88.43	34.86	11.07	31.82	371	88 PEAK																																																																																
Avg																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.06</td><td>51.72</td><td>54.00</td><td>-2.28</td><td>37.54</td><td>34.87</td><td>11.09</td><td>31.78</td><td>371 88 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5149.06	51.72	54.00	-2.28	37.54	34.87	11.09	31.78	371 88 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>92.67</td><td>-----</td><td>78.56</td><td>34.86</td><td>11.07</td><td>31.82</td><td>371</td><td>88 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5190.00	92.67	-----	78.56	34.86	11.07	31.82	371
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5149.06	51.72	54.00	-2.28	37.54	34.87	11.09	31.78	371 88 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5190.00	92.67	-----	78.56	34.86	11.07	31.82	371	88 AVERAGE																																																																																



Mode	35																																	
	Band Edge - R																																	
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_5190MHz																																	
ANT	1																																	
Pol.	Horizontal	Fundamental																																
Peak	Date: 2024-09-15 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>5413.97</td><td>52.89</td><td>74.00</td><td>-21.11</td><td>39.25</td><td>34.82</td><td>10.93</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5413.97	52.89	74.00	-21.11	39.25	34.82	10.93	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																											
1	5413.97	52.89	74.00	-21.11	39.25	34.82	10.93																											
Avg	Date: 2024-09-15 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>5456.38</td><td>41.24</td><td>54.00</td><td>-12.76</td><td>27.48</td><td>34.81</td><td>11.11</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5456.38	41.24	54.00	-12.76	27.48	34.81	11.11	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																											
1	5456.38	41.24	54.00	-12.76	27.48	34.81	11.11																											

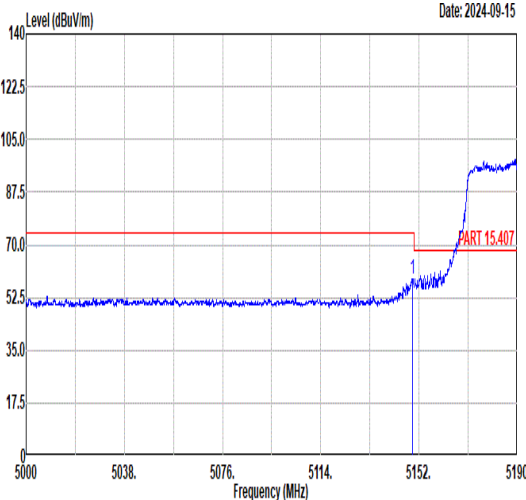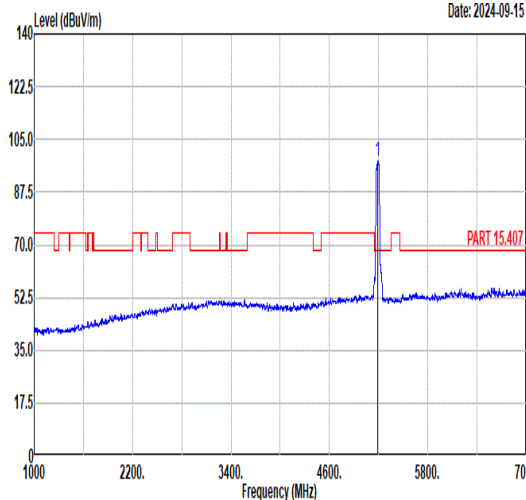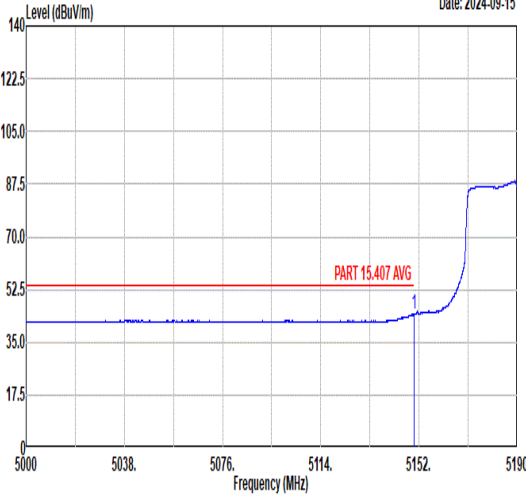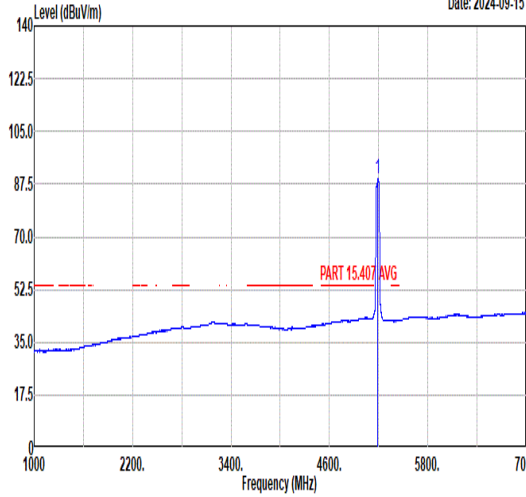

Mode	35																																																																																								
	Band Edge - L																																																																																								
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_5190MHz																																																																																								
ANT	1																																																																																								
Pol.	Vertical					Fundamental																																																																																			
Peak																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.63</td><td>58.77</td><td>74.00</td><td>-15.23</td><td>44.59</td><td>34.87</td><td>11.09</td><td>31.78</td><td>400 356 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5149.63	58.77	74.00	-15.23	44.59	34.87	11.09	31.78	400 356 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>97.91</td><td>-----</td><td>83.82</td><td>34.86</td><td>11.06</td><td>31.83</td><td>400</td><td>356 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	97.91	-----	83.82	34.86	11.06	31.83	400
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5149.63	58.77	74.00	-15.23	44.59	34.87	11.09	31.78	400 356 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5190.00	97.91	-----	83.82	34.86	11.06	31.83	400	356 PEAK																																																																																
Avg																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.99</td><td>44.20</td><td>54.00</td><td>-9.80</td><td>30.03</td><td>34.87</td><td>11.08</td><td>31.78</td><td>400 356 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5149.99	44.20	54.00	-9.80	30.03	34.87	11.08	31.78	400 356 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>89.24</td><td>-----</td><td>75.15</td><td>34.86</td><td>11.06</td><td>31.83</td><td>400</td><td>356 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	89.24	-----	75.15	34.86	11.06	31.83	400
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5149.99	44.20	54.00	-9.80	30.03	34.87	11.08	31.78	400 356 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5190.00	89.24	-----	75.15	34.86	11.06	31.83	400	356 AVERAGE																																																																																







Mode	35									
	Band Edge - R									
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_5190MHz									
ANT	1									
Pol.	Vertical					Fundamental				
Peak	Level (dBuV/m) <									



Mode	35																																																																																																					
	Harmonic																																																																																																					
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_5190MHz																																																																																																					
ANT	1																																																																																																					
Pol.	Horizontal						Vertical																																																																																															
Peak Avg	Date: 2024-09-18						Date: 2024-09-18																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1 10380.00</td><td>47.69</td><td>68.30</td><td>-20.61</td><td>44.86</td><td>39.45</td><td>14.16</td><td>50.78</td><td>--- --- Peak</td></tr><tr><td>2 15570.00</td><td>47.95</td><td>74.00</td><td>-26.05</td><td>40.70</td><td>41.84</td><td>16.87</td><td>51.46</td><td>--- --- Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1 10380.00	47.69	68.30	-20.61	44.86	39.45	14.16	50.78	--- --- Peak	2 15570.00	47.95	74.00	-26.05	40.70	41.84	16.87	51.46	--- --- Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1 10380.00</td><td>48.29</td><td>68.30</td><td>-20.01</td><td>45.46</td><td>39.45</td><td>14.16</td><td>50.78</td><td>--- --- Peak</td></tr><tr><td>2 15570.00</td><td>47.19</td><td>74.00</td><td>-26.81</td><td>39.94</td><td>41.84</td><td>16.87</td><td>51.46</td><td>--- --- Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1 10380.00	48.29	68.30	-20.01	45.46	39.45	14.16	50.78	--- --- Peak	2 15570.00	47.19	74.00	-26.81	39.94	41.84	16.87	51.46	--- --- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1 10380.00	47.69	68.30	-20.61	44.86	39.45	14.16	50.78	--- --- Peak																																																																																														
2 15570.00	47.95	74.00	-26.05	40.70	41.84	16.87	51.46	--- --- Peak																																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1 10380.00	48.29	68.30	-20.01	45.46	39.45	14.16	50.78	--- --- Peak																																																																																														
2 15570.00	47.19	74.00	-26.81	39.94	41.84	16.87	51.46	--- --- Peak																																																																																														

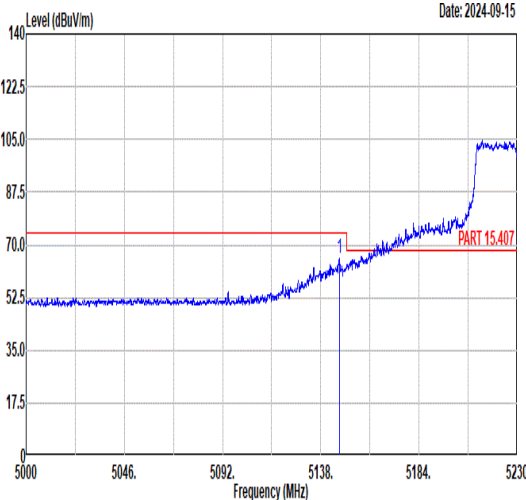
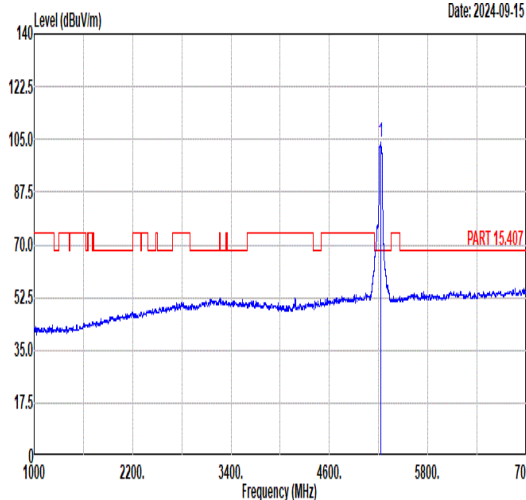
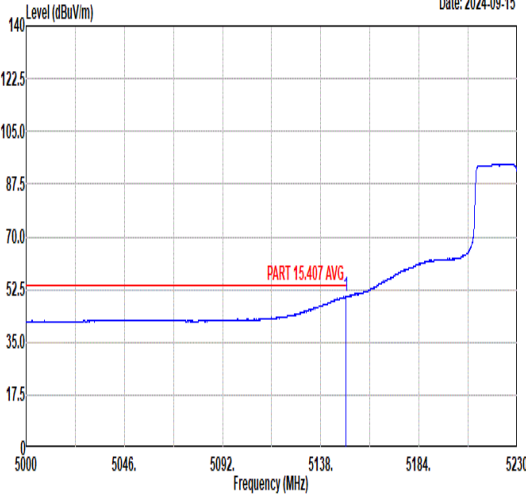
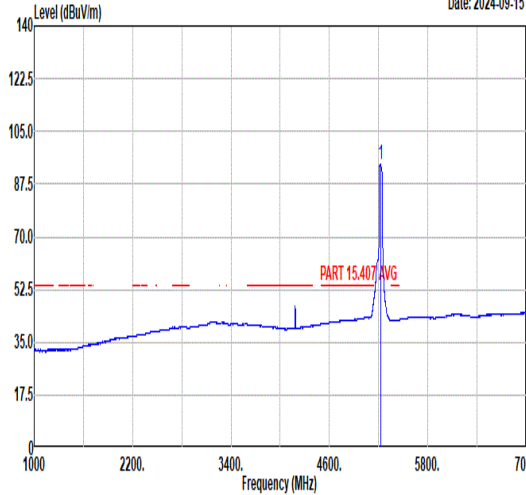


Mode	36																																																																																									
	Band Edge - L																																																																																									
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_5230MHz																																																																																									
ANT	1																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak																																																																																										
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5146.63</td><td>65.28</td><td>74.00</td><td>-8.72</td><td>51.10</td><td>34.87</td><td>11.09</td><td>31.78</td><td>329 91 PEAK</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5146.63	65.28	74.00	-8.72	51.10	34.87	11.09	31.78	329 91 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>103.96</td><td>-----</td><td>-----</td><td>89.95</td><td>34.85</td><td>11.04</td><td>31.88</td><td>329 91 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5230.00	103.96	-----	-----	89.95	34.85	11.04	31.88
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5146.63	65.28	74.00	-8.72	51.10	34.87	11.09	31.78	329 91 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5230.00	103.96	-----	-----	89.95	34.85	11.04	31.88	329 91 PEAK																																																																																	
Avg																																																																																										
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.64</td><td>50.08</td><td>54.00</td><td>-3.92</td><td>35.90</td><td>34.87</td><td>11.09</td><td>31.78</td><td>329 91 AVERAGE</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5149.64	50.08	54.00	-3.92	35.90	34.87	11.09	31.78	329 91 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>93.78</td><td>-----</td><td>-----</td><td>79.75</td><td>34.86</td><td>11.04</td><td>31.87</td><td>329 91 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5230.00	93.78	-----	-----	79.75	34.86	11.04	31.87
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5149.64	50.08	54.00	-3.92	35.90	34.87	11.09	31.78	329 91 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5230.00	93.78	-----	-----	79.75	34.86	11.04	31.87	329 91 AVERAGE																																																																																	





Mode	36																																										
	Band Edge - R																																										
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_5230MHz																																										
ANT	1																																										
Pol.	Horizontal	Fundamental																																									
Peak	Date: 2024-09-15 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5456.41</td><td>51.94</td><td>74.00</td><td>-22.06</td><td>38.18</td><td>34.81</td><td>11.11</td><td>32.16</td><td>329</td><td>91 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5456.41	51.94	74.00	-22.06	38.18	34.81	11.11	32.16	329	91 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5456.41	51.94	74.00	-22.06	38.18	34.81	11.11	32.16	329	91 PEAK																																	
Avg	Date: 2024-09-15 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5458.51</td><td>41.51</td><td>54.00</td><td>-12.49</td><td>27.75</td><td>34.81</td><td>11.11</td><td>32.16</td><td>329</td><td>91 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5458.51	41.51	54.00	-12.49	27.75	34.81	11.11	32.16	329	91 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5458.51	41.51	54.00	-12.49	27.75	34.81	11.11	32.16	329	91 AVERAGE																																	

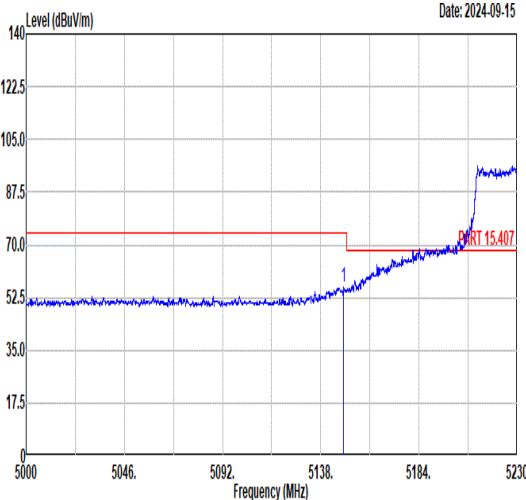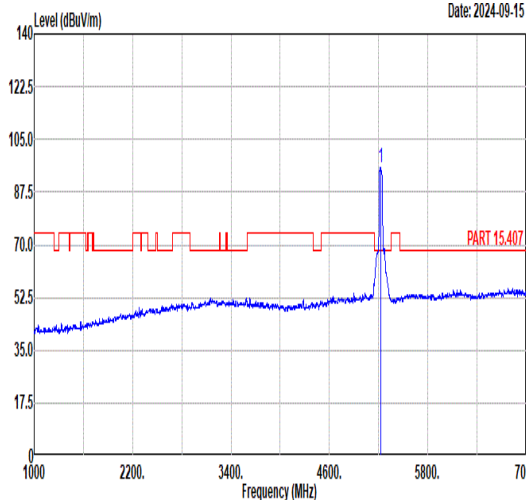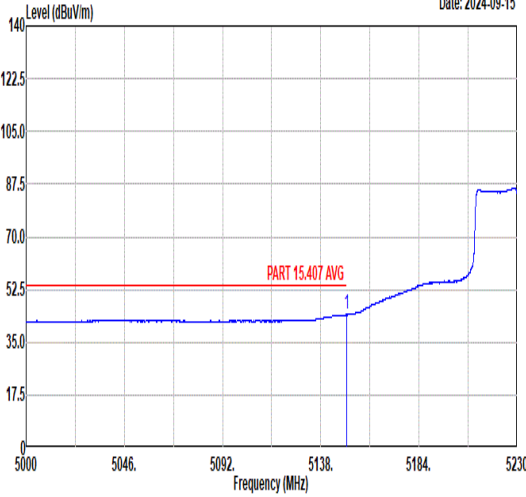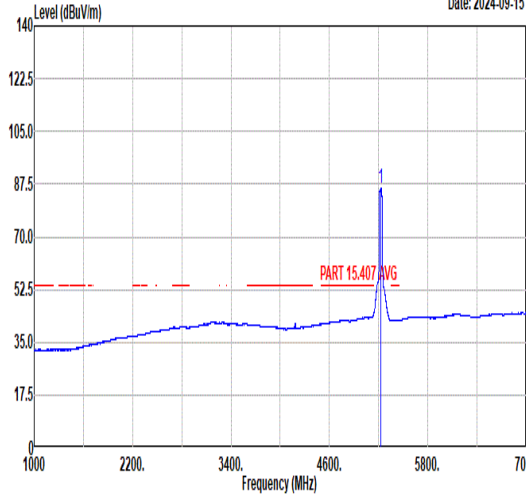

Mode	36																																																																																								
	Band Edge - L																																																																																								
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_5230MHz																																																																																								
ANT	1																																																																																								
Pol.	Vertical					Fundamental																																																																																			
Peak																																																																																									
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5148.72</td><td>55.89</td><td>74.00</td><td>-18.11</td><td>41.71</td><td>34.87</td><td>11.09</td><td>31.78</td><td>382 349 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5148.72	55.89	74.00	-18.11	41.71	34.87	11.09	31.78	382 349 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5230.00</td><td>95.49</td><td>-----</td><td>81.46</td><td>34.86</td><td>11.04</td><td>31.87</td><td>382</td><td>349 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5230.00	95.49	-----	81.46	34.86	11.04	31.87	382
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5148.72	55.89	74.00	-18.11	41.71	34.87	11.09	31.78	382 349 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5230.00	95.49	-----	81.46	34.86	11.04	31.87	382	349 PEAK																																																																																
Avg																																																																																									
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.98</td><td>44.19</td><td>54.00</td><td>-9.81</td><td>30.02</td><td>34.87</td><td>11.08</td><td>31.78</td><td>382 349 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5149.98	44.19	54.00	-9.81	30.02	34.87	11.08	31.78	382 349 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5230.00</td><td>86.34</td><td>-----</td><td>72.33</td><td>34.85</td><td>11.04</td><td>31.88</td><td>382</td><td>349 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5230.00	86.34	-----	72.33	34.85	11.04	31.88	382
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5149.98	44.19	54.00	-9.81	30.02	34.87	11.08	31.78	382 349 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5230.00	86.34	-----	72.33	34.85	11.04	31.88	382	349 AVERAGE																																																																																



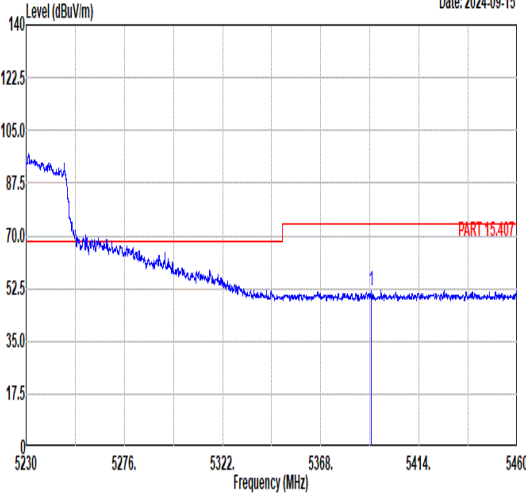
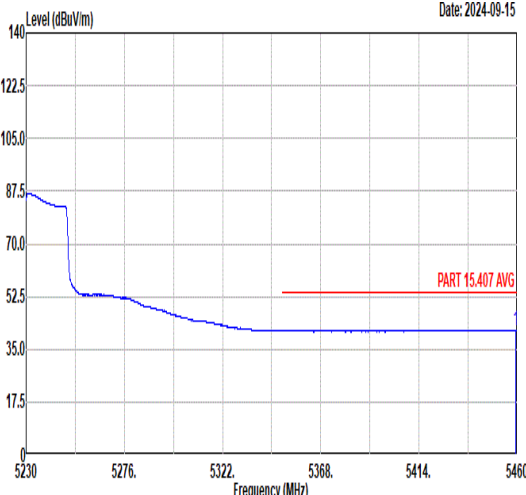


Mode	36																																									
	Band Edge - R																																									
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_5230MHz																																									
ANT	1																																									
Pol.	Vertical	Fundamental																																								
Peak	Date: 2024-09-15 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5391.60</td><td>51.81</td><td>74.00</td><td>-22.19</td><td>38.16</td><td>34.82</td><td>10.91</td><td>32.08</td><td>382 349 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5391.60	51.81	74.00	-22.19	38.16	34.82	10.91	32.08	382 349 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5391.60	51.81	74.00	-22.19	38.16	34.82	10.91	32.08	382 349 PEAK																																	
Avg	Date: 2024-09-15 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.20</td><td>41.42</td><td>54.00</td><td>-12.58</td><td>27.65</td><td>34.81</td><td>11.12</td><td>32.16</td><td>382 349 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5459.20	41.42	54.00	-12.58	27.65	34.81	11.12	32.16	382 349 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5459.20	41.42	54.00	-12.58	27.65	34.81	11.12	32.16	382 349 AVERAGE																																	



Mode	36																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_5230MHz																																																																																																																																	
ANT	1																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg	Level (dBuV/m) Date: 2024-09-18 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>10460.00</td><td>48.25</td><td>68.30</td><td>-20.05</td><td>45.35</td><td>39.48</td><td>14.21</td><td>50.79</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15690.00</td><td>46.48</td><td>74.00</td><td>-27.52</td><td>39.15</td><td>41.91</td><td>16.97</td><td>51.55</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	10460.00	48.25	68.30	-20.05	45.35	39.48	14.21	50.79	---	---	Peak	2	15690.00	46.48	74.00	-27.52	39.15	41.91	16.97	51.55	---	---	Peak	Level (dBuV/m) Date: 2024-09-18 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>10460.00</td><td>47.76</td><td>68.30</td><td>-20.54</td><td>44.86</td><td>39.48</td><td>14.21</td><td>50.79</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15690.00</td><td>47.49</td><td>74.00</td><td>-26.51</td><td>40.16</td><td>41.91</td><td>16.97</td><td>51.55</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	10460.00	47.76	68.30	-20.54	44.86	39.48	14.21	50.79	---	---	Peak	2	15690.00	47.49	74.00	-26.51	40.16	41.91	16.97	51.55	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																								
1	10460.00	48.25	68.30	-20.05	45.35	39.48	14.21	50.79	---	---	Peak																																																																																																																							
2	15690.00	46.48	74.00	-27.52	39.15	41.91	16.97	51.55	---	---	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																								
1	10460.00	47.76	68.30	-20.54	44.86	39.48	14.21	50.79	---	---	Peak																																																																																																																							
2	15690.00	47.49	74.00	-26.51	40.16	41.91	16.97	51.55	---	---	Peak																																																																																																																							

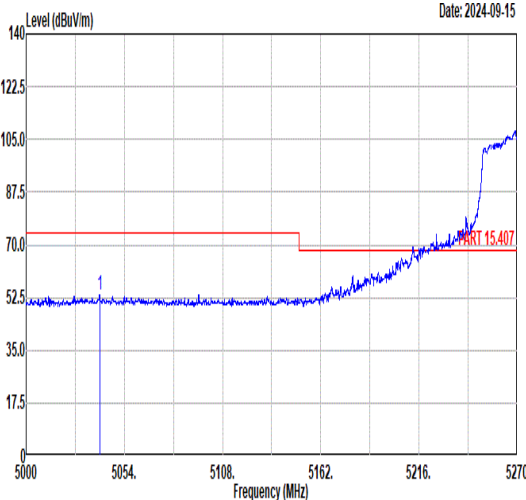
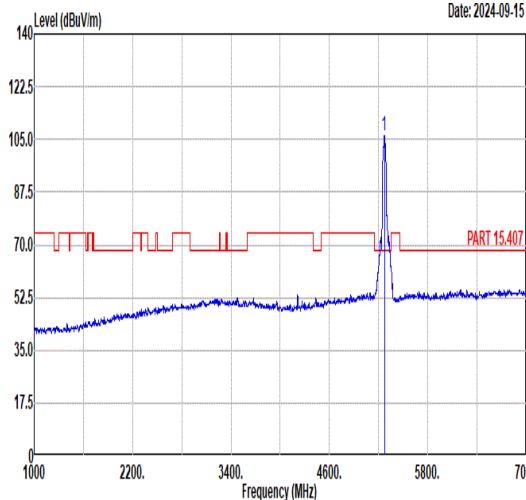
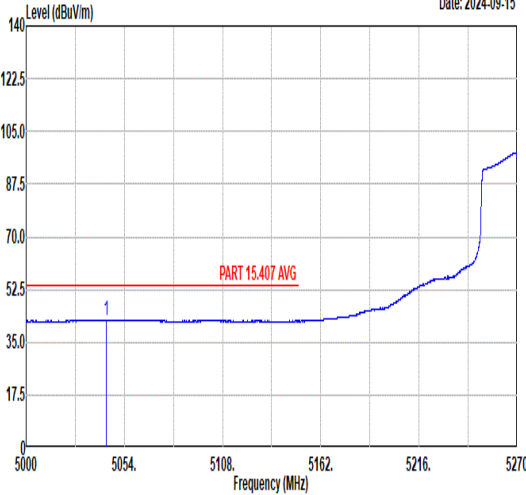
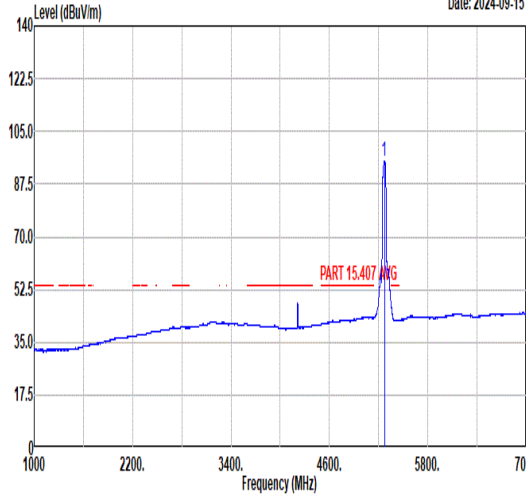


Mode	37																																																																																									
	Band Edge - L																																																																																									
	U-NII-2A_5.25-5.35_802.11ax HE40_CH54_5270MHz																																																																																									
ANT	1																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak																																																																																										
		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5040.39	53.55	74.00	-20.45	39.16	34.89	11.15	31.65	387	82	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5270.00</td><td>106.44</td><td>-----</td><td>-----</td><td>92.51</td><td>34.85</td><td>11.01</td><td>31.93</td><td>387</td><td>82</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5270.00	106.44	-----	-----	92.51	34.85	11.01	31.93	387	82	PEAK					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5040.39	53.55	74.00	-20.45	39.16	34.89	11.15	31.65	387	82	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5270.00	106.44	-----	-----	92.51	34.85	11.01	31.93	387	82	PEAK																																																																															
Avg																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5043.90</td><td>42.47</td><td>54.00</td><td>-11.53</td><td>28.09</td><td>34.89</td><td>11.14</td><td>31.65</td><td>387</td><td>82</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5043.90	42.47	54.00	-11.53	28.09	34.89	11.14	31.65	387	82	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5270.00</td><td>95.25</td><td>-----</td><td>-----</td><td>81.32</td><td>34.85</td><td>11.01</td><td>31.93</td><td>387</td><td>82</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5270.00	95.25	-----	-----	81.32	34.85	11.01	31.93	387	82
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5043.90	42.47	54.00	-11.53	28.09	34.89	11.14	31.65	387	82	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5270.00	95.25	-----	-----	81.32	34.85	11.01	31.93	387	82	AVERAGE																																																																															



Mode	37																																																				
	Band Edge - R																																																				
	U-NII-2A_5.25-5.35_802.11ax HE40_CH54_5270MHz																																																				
ANT	1																																																				
Pol.	Horizontal						Fundamental																																														
Peak	Level (dBuV/m) Date: 2024-09-15 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5361.50</td><td>64.98</td><td>74.00</td><td>-9.02</td><td>51.25</td><td>34.83</td><td>10.94</td><td>32.04</td><td>387</td><td>82</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5361.50	64.98	74.00	-9.02	51.25	34.83	10.94	32.04	387	82	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	5361.50	64.98	74.00	-9.02	51.25	34.83	10.94	32.04	387	82	PEAK																																										
Avg	Level (dBuV/m) Date: 2024-09-15 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5350.09</td><td>48.49</td><td>54.00</td><td>-5.51</td><td>34.75</td><td>34.83</td><td>10.94</td><td>32.03</td><td>387</td><td>82</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5350.09	48.49	54.00	-5.51	34.75	34.83	10.94	32.03	387	82	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	5350.09	48.49	54.00	-5.51	34.75	34.83	10.94	32.03	387	82	AVERAGE																																										

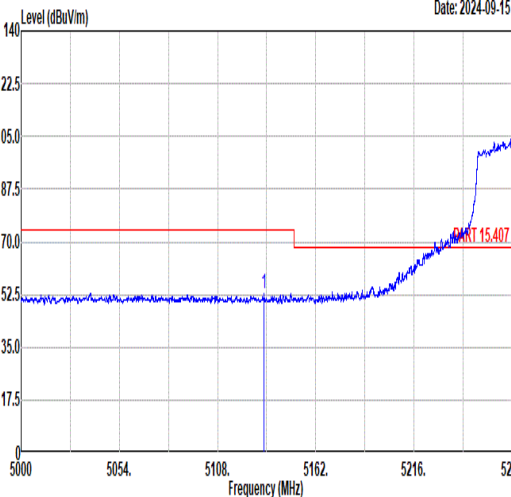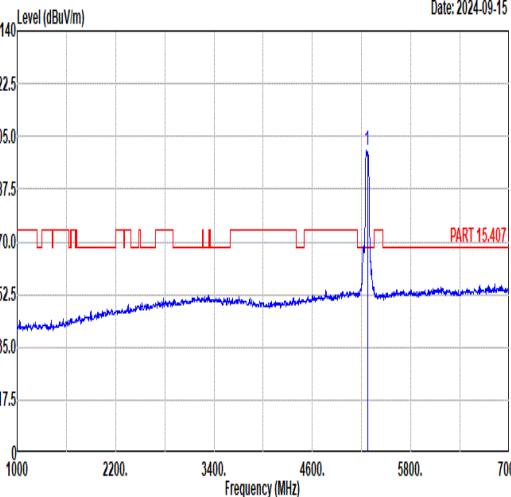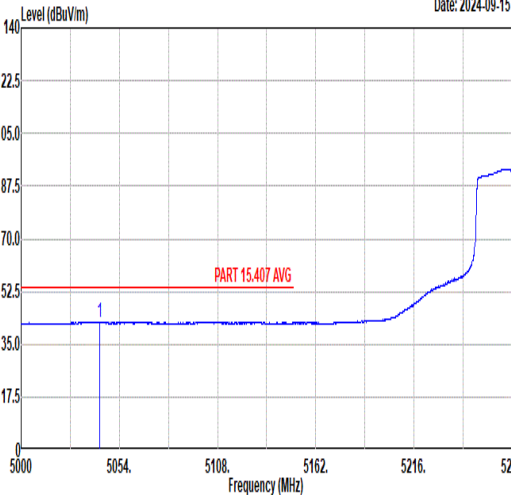
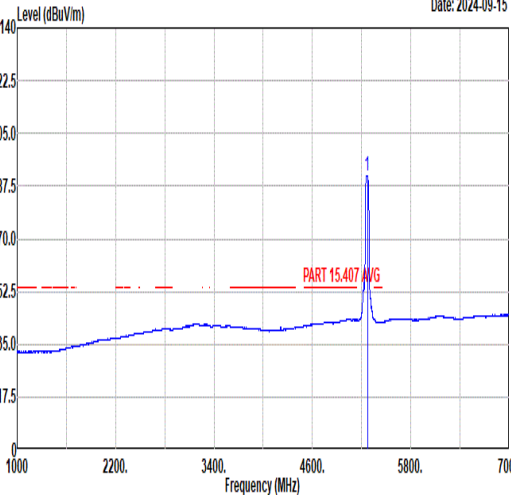


Mode	37																																																																																									
	Band Edge - L																																																																																									
	U-NII-2A_5.25-5.35_802.11ax HE40_CH54_5270MHz																																																																																									
ANT	1																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5133.52</td><td>53.02</td><td>74.00</td><td>-20.98</td><td>38.82</td><td>34.87</td><td>11.09</td><td>31.76</td><td>367</td><td>344</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5133.52	53.02	74.00	-20.98	38.82	34.87	11.09	31.76	367	344	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5270.00</td><td>100.62</td><td>-----</td><td>-----</td><td>86.66</td><td>34.85</td><td>11.02</td><td>31.91</td><td>367</td><td>344</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5270.00	100.62	-----	-----	86.66	34.85	11.02	31.91	367	344
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5133.52	53.02	74.00	-20.98	38.82	34.87	11.09	31.76	367	344	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5270.00	100.62	-----	-----	86.66	34.85	11.02	31.91	367	344	PEAK																																																																															
Avg																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5043.09</td><td>42.33</td><td>54.00</td><td>-11.67</td><td>27.94</td><td>34.89</td><td>11.15</td><td>31.65</td><td>367</td><td>344</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5043.09	42.33	54.00	-11.67	27.94	34.89	11.15	31.65	367	344	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5270.00</td><td>91.01</td><td>-----</td><td>-----</td><td>77.07</td><td>34.85</td><td>11.01</td><td>31.92</td><td>367</td><td>344</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5270.00	91.01	-----	-----	77.07	34.85	11.01	31.92	367	344
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5043.09	42.33	54.00	-11.67	27.94	34.89	11.15	31.65	367	344	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5270.00	91.01	-----	-----	77.07	34.85	11.01	31.92	367	344	AVERAGE																																																																															







Mode	37																																																			
	Band Edge - R																																																			
	U-NII-2A_5.25-5.35_802.11ax HE40_CH54_5270MHz																																																			
ANT	1																																																			
Pol.	Vertical						Fundamental																																													
Peak	Level (dBuV/m) Date: 2024-09-15 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5351.23</td><td>54.10</td><td>74.00</td><td>-19.90</td><td>40.36</td><td>34.83</td><td>10.94</td><td>32.03</td><td>367</td><td>344</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5351.23	54.10	74.00	-19.90	40.36	34.83	10.94	32.03	367	344	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																											
1	5351.23	54.10	74.00	-19.90	40.36	34.83	10.94	32.03	367	344	PEAK																																									
Avg	Level (dBuV/m) Date: 2024-09-15 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5354.65</td><td>42.43</td><td>54.00</td><td>-11.57</td><td>28.69</td><td>34.83</td><td>10.94</td><td>32.03</td><td>367</td><td>344</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5354.65	42.43	54.00	-11.57	28.69	34.83	10.94	32.03	367	344	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																											
1	5354.65	42.43	54.00	-11.57	28.69	34.83	10.94	32.03	367	344	AVERAGE																																									

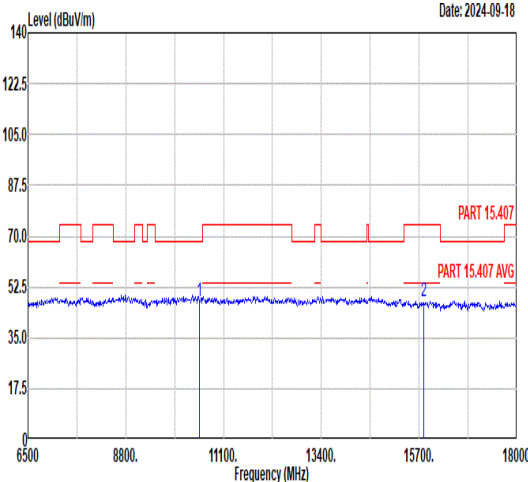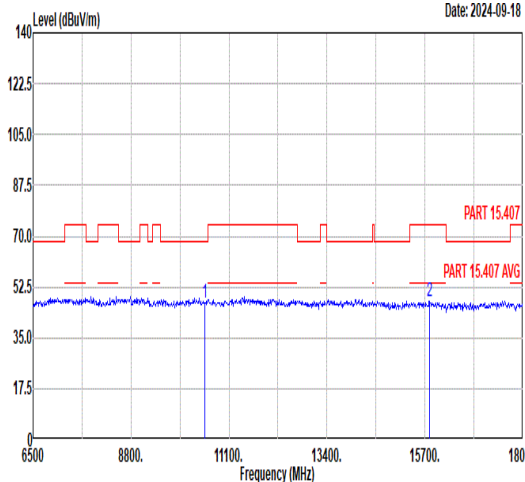

Mode	37																																																																						
	Harmonic																																																																						
	U-NII-2A_5.25-5.35_802.11ax HE40_CH54_5270MHz																																																																						
ANT	1																																																																						
Pol.	Horizontal						Vertical																																																																
Peak Avg																																																																							
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 10540.00</td><td>47.78</td><td>68.30</td><td>-20.52</td><td>44.83</td><td>39.49</td><td>14.26</td><td>50.80</td><td>---</td><td>---</td><td>Peak</td><td></td></tr><tr><td>2 15810.00</td><td>47.34</td><td>74.00</td><td>-26.66</td><td>39.94</td><td>41.99</td><td>17.06</td><td>51.65</td><td>---</td><td>---</td><td>Peak</td><td></td></tr></table>														Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1 10540.00	47.78	68.30	-20.52	44.83	39.49	14.26	50.80	---	---	Peak		2 15810.00	47.34	74.00	-26.66	39.94	41.99	17.06	51.65	---	---	Peak	
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																														
1 10540.00	47.78	68.30	-20.52	44.83	39.49	14.26	50.80	---	---	Peak																																																													
2 15810.00	47.34	74.00	-26.66	39.94	41.99	17.06	51.65	---	---	Peak																																																													
<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 10540.00</td><td>47.19</td><td>68.30</td><td>-21.11</td><td>44.24</td><td>39.49</td><td>14.26</td><td>50.80</td><td>---</td><td>---</td><td>Peak</td><td></td></tr><tr><td>2 15810.00</td><td>47.51</td><td>74.00</td><td>-26.49</td><td>40.11</td><td>41.99</td><td>17.06</td><td>51.65</td><td>---</td><td>---</td><td>Peak</td><td></td></tr></table>														Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1 10540.00	47.19	68.30	-21.11	44.24	39.49	14.26	50.80	---	---	Peak		2 15810.00	47.51	74.00	-26.49	40.11	41.99	17.06	51.65	---	---	Peak		
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																														
1 10540.00	47.19	68.30	-21.11	44.24	39.49	14.26	50.80	---	---	Peak																																																													
2 15810.00	47.51	74.00	-26.49	40.11	41.99	17.06	51.65	---	---	Peak																																																													

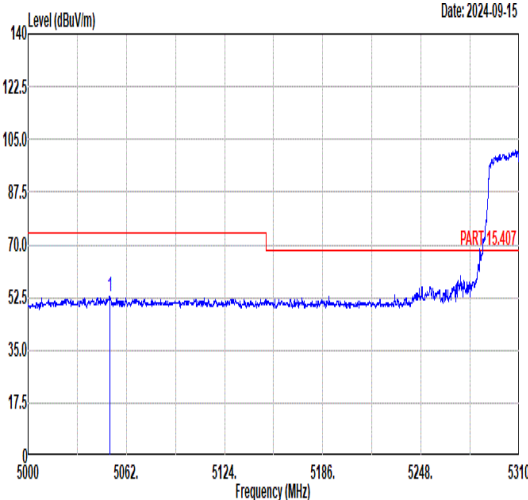
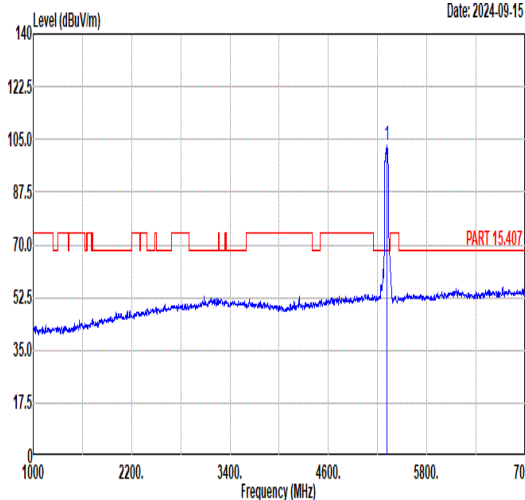
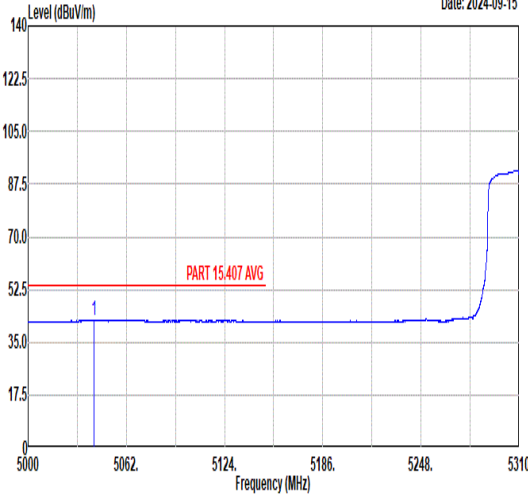
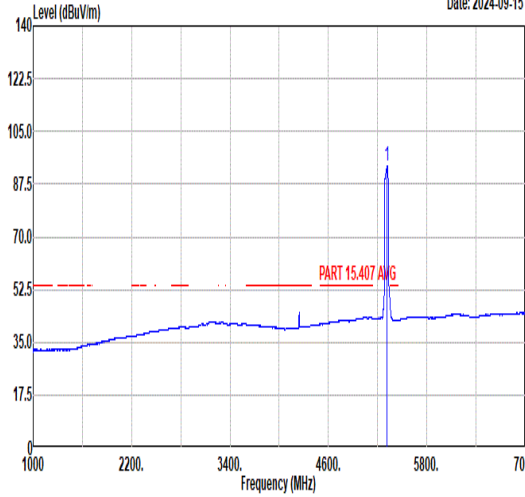


Mode	38																																																																																									
	Band Edge - L																																																																																									
	U-NII-2A_5.25-5.35_802.11ax HE40_CH62_5310MHz																																																																																									
ANT	1																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5051.65</td><td>52.83</td><td>74.00</td><td>-21.17</td><td>38.46</td><td>34.89</td><td>11.14</td><td>31.66</td><td>381</td><td>77</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5051.65	52.83	74.00	-21.17	38.46	34.89	11.14	31.66	381	77	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5310.00</td><td>103.27</td><td>-----</td><td>-----</td><td>89.44</td><td>34.84</td><td>10.97</td><td>31.98</td><td>381</td><td>77</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5310.00	103.27	-----	-----	89.44	34.84	10.97	31.98	381	77
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5051.65	52.83	74.00	-21.17	38.46	34.89	11.14	31.66	381	77	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5310.00	103.27	-----	-----	89.44	34.84	10.97	31.98	381	77	PEAK																																																																															
Avg																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5041.73</td><td>42.30</td><td>54.00</td><td>-11.70</td><td>27.91</td><td>34.89</td><td>11.15</td><td>31.65</td><td>381</td><td>77</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5041.73	42.30	54.00	-11.70	27.91	34.89	11.15	31.65	381	77	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5310.00</td><td>93.54</td><td>-----</td><td>-----</td><td>79.72</td><td>34.84</td><td>10.97</td><td>31.99</td><td>381</td><td>77</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5310.00	93.54	-----	-----	79.72	34.84	10.97	31.99	381	77
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5041.73	42.30	54.00	-11.70	27.91	34.89	11.15	31.65	381	77	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5310.00	93.54	-----	-----	79.72	34.84	10.97	31.99	381	77	AVERAGE																																																																															



Mode	38										
	Band Edge - R										
	U-NII-2A_5.25-5.35_802.11ax HE40_CH62_5310MHz										
ANT	1										
Pol.	Horizontal						Fundamental				
Peak	</										

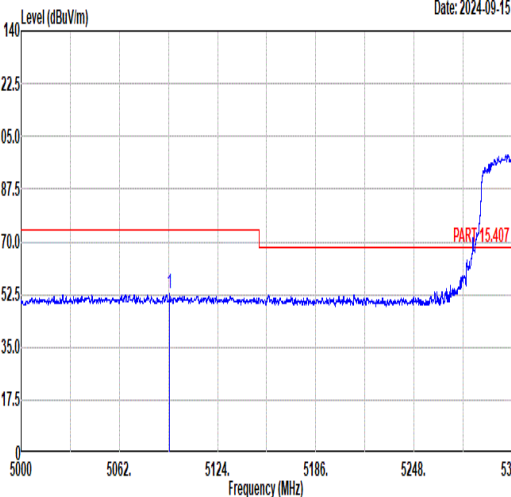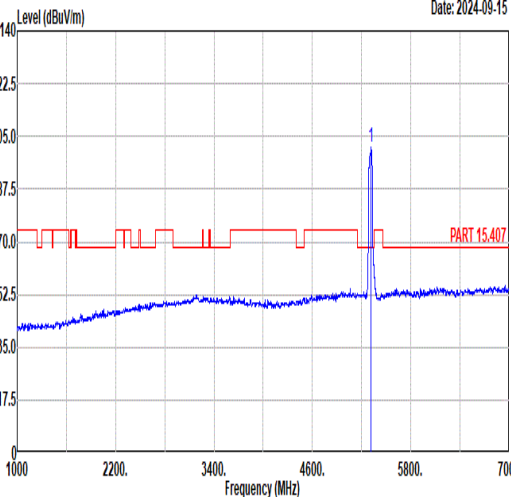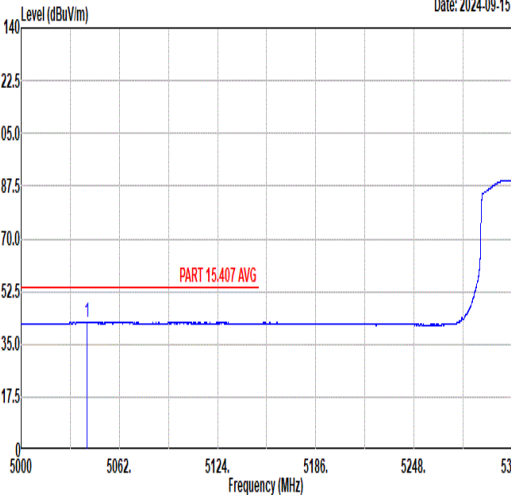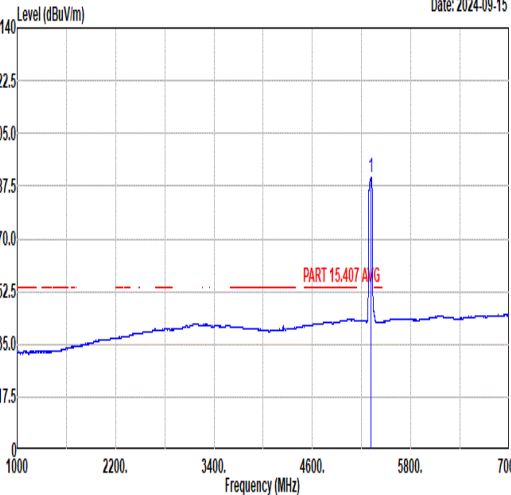

Mode	38																																																																																									
	Band Edge - L																																																																																									
	U-NII-2A_5.25-5.35_802.11ax HE40_CH62_5310MHz																																																																																									
ANT	1																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5093.81</td><td>52.92</td><td>74.00</td><td>-21.08</td><td>38.63</td><td>34.88</td><td>11.12</td><td>31.71</td><td>400</td><td>348</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5093.81	52.92	74.00	-21.08	38.63	34.88	11.12	31.71	400	348	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5310.00</td><td>101.33</td><td>-----</td><td>-----</td><td>87.51</td><td>34.84</td><td>10.97</td><td>31.99</td><td>400</td><td>348</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5310.00	101.33	-----	-----	87.51	34.84	10.97	31.99	400	348
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5093.81	52.92	74.00	-21.08	38.63	34.88	11.12	31.71	400	348	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5310.00	101.33	-----	-----	87.51	34.84	10.97	31.99	400	348	PEAK																																																																															
Avg																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5041.73</td><td>42.30</td><td>54.00</td><td>-11.70</td><td>27.91</td><td>34.89</td><td>11.15</td><td>31.65</td><td>400</td><td>348</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5041.73	42.30	54.00	-11.70	27.91	34.89	11.15	31.65	400	348	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5310.00</td><td>90.35</td><td>-----</td><td>-----</td><td>76.53</td><td>34.84</td><td>10.97</td><td>31.99</td><td>400</td><td>348</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5310.00	90.35	-----	-----	76.53	34.84	10.97	31.99	400	348
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5041.73	42.30	54.00	-11.70	27.91	34.89	11.15	31.65	400	348	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5310.00	90.35	-----	-----	76.53	34.84	10.97	31.99	400	348	AVERAGE																																																																															

