



Appendix B

Detailed Test Results

1. GSM
GSM850 for Head& Body
GSM1900 for Head& Body
2. WCDMA
WCDMA Band II for Head& Body
WCDMA Band IV for Head& Body
WCDMA Band V for Head& Body
3. LTE
LTE Band 7 for Head& Body
LTE Band 19 for Head& Body
LTE Band 25 for Head& Body
LTE Band 26 for Head& Body
LTE Band 38 for Head& Body
LTE Band 41 for Head& Body
LTE Band 66 for Head& Body
4. WIFI&BT
WIFI 2.4GHz for Head& Body
BT for Head& Body
WIFI 5.2GHz for Head& Body
WIFI 5.8GHz for Head& Body



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date:2024/11/06

Test Laboratory: LCS-SAR Lab
GSM 850 190CH Left Cheek

DUT: Smart Phone; Type: Blade GT; Serial: A241031015-1


Communication System: UID 0, GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1: 1
Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.918 \text{ S/m}$; $\epsilon_r = 41.903$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.26, 9.26, 9.26); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.144 W/kg

Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 7.542 V/m ; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 0.165 W/kg
SAR(1 g) = 0.166 W/kg ; SAR(10 g) = 0.074 W/kg
Maximum value of SAR (measured) = 0.159 W/kg

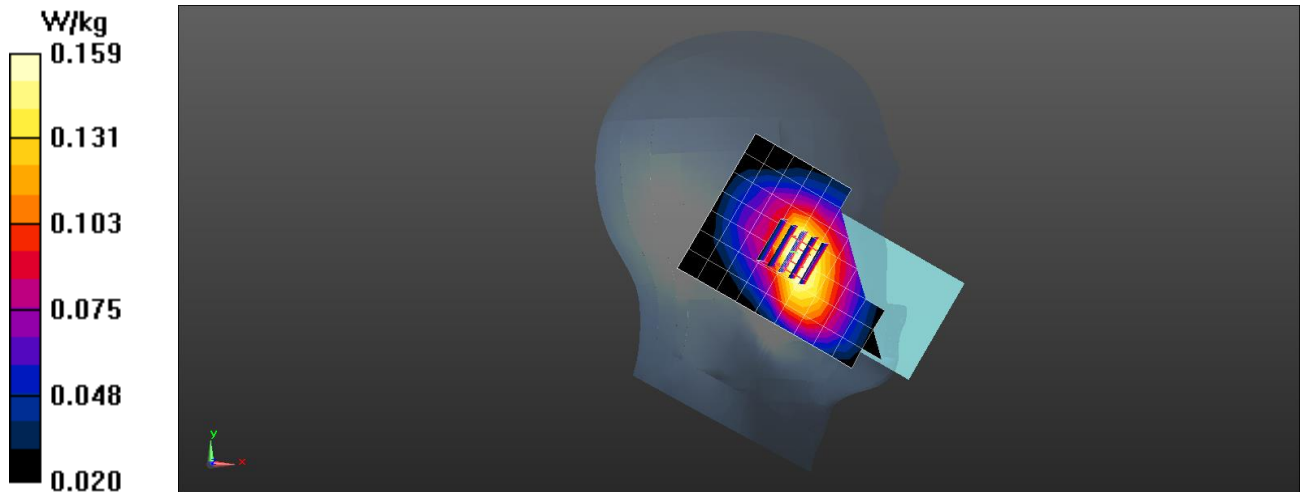

Date: 2024/11/06

Test Laboratory: LCS-SAR Lab

GSM 850 GPRS 3TX 190CH Rear side 10mm

DUT: Smart Phone; Type: Blade GT; Serial: A241031015-1

Communication System: UID 0, GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1: 2.77

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.918 \text{ S/m}$; $\epsilon_r = 41.903$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.26, 9.26, 9.26); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.335 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.85 V/m ; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.254 W/kg

SAR(1 g) = 0.289 W/kg ; SAR(10 g) = 0.154 W/kg

Maximum value of SAR (measured) = 0.340 W/kg

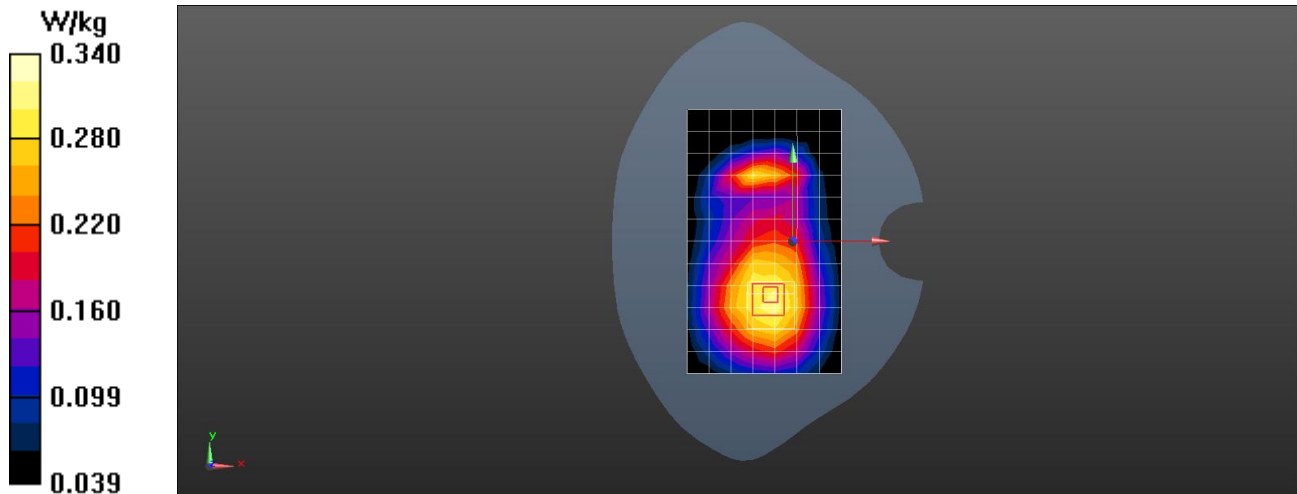

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2024/11/11

Test Laboratory: LCS-SAR Lab
GSM 1900 661CH Left Cheek

DUT: Smart Phone; Type: Blade GT; Serial: A241031015-1



Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 1: 1
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.408 \text{ S/m}$; $\epsilon_r = 39.188$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.85, 7.85, 7.85); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (8x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.177 W/kg

Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 3.658 V/m ; Power Drift = 0.20 dB
Peak SAR (extrapolated) = 0.214 W/kg
SAR(1 g) = 0.196 W/kg ; SAR(10 g) = 0.110 W/kg
Maximum value of SAR (measured) = 0.190 W/kg

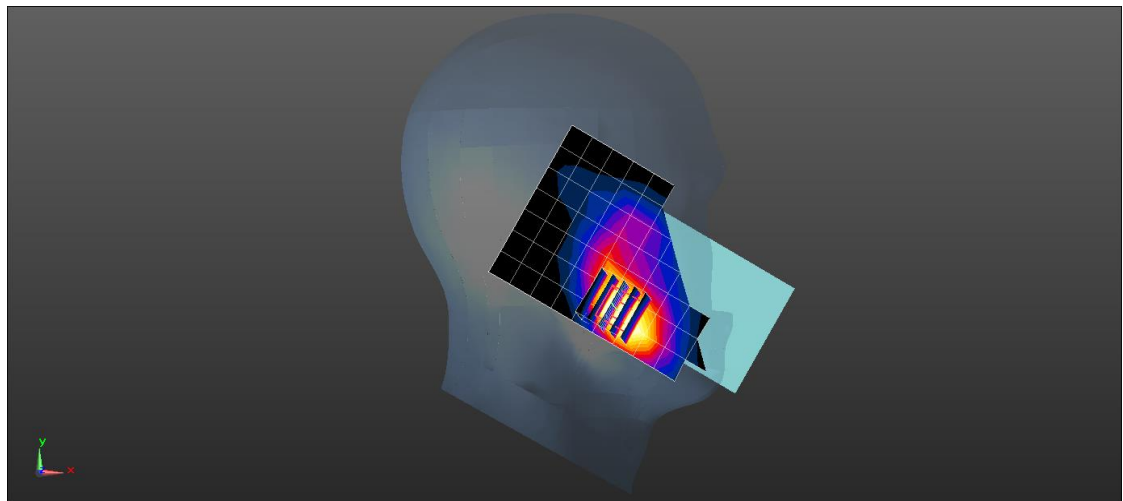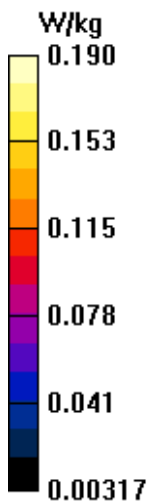

Date: 2024/11/11

Test Laboratory: LCS-SAR Lab
GSM 1900 GPRS 2TX 661CH Rear side 10mm

DUT: Smart Phone; Type: Blade GT; Serial: A241031015-1


Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 1: 4.15
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.408$ S/m; $\epsilon_r = 39.188$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.85, 7.85, 7.85); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.178 W/kg

Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.878 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 0.296 W/kg
SAR(1 g) = 0.188 W/kg; SAR(10 g) = 0.096 W/kg
Maximum value of SAR (measured) = 0.195 W/kg

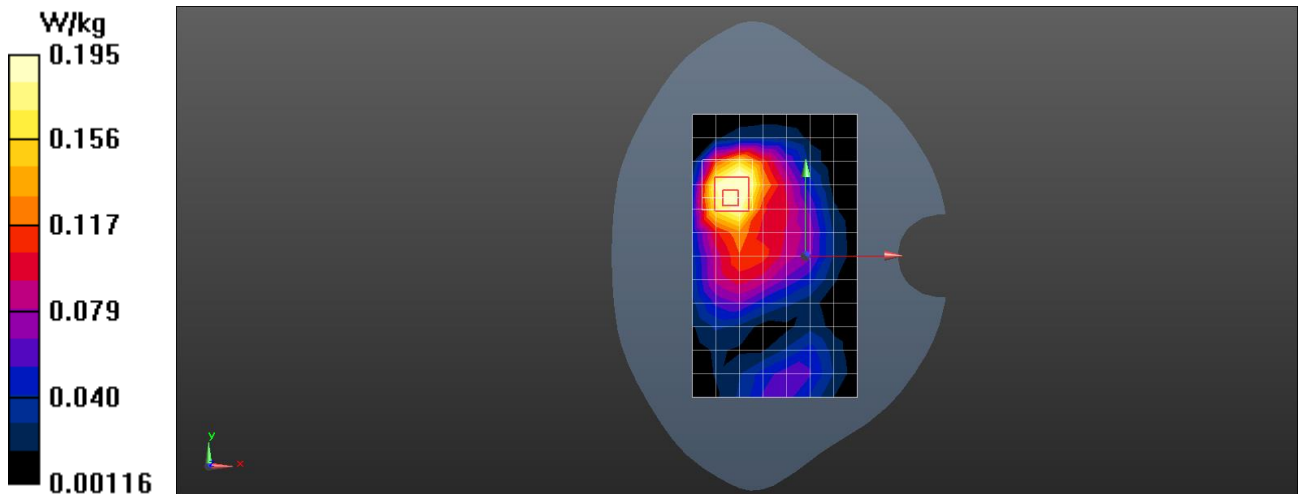

Date: 2024/11/11

Test Laboratory: LCS-SAR Lab
WCDMA II RMC 9538CH Left Cheek

DUT: Smart Phone; Type: Blade GT; Serial: A241031015-1

Communication System: UID 0, WCDMA (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.418$ S/m; $\epsilon_r = 39.047$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.85, 7.85, 7.85); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.509 W/kg



Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.325 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.168 W/kg; SAR(10 g) = 0.054 W/kg

Maximum value of SAR (measured) = 0.528 W/kg

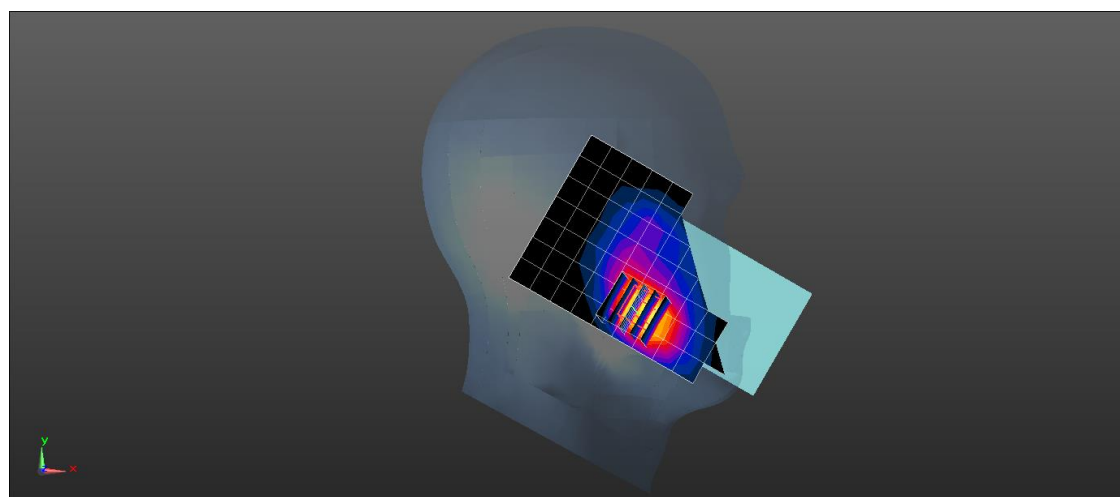

Date: 2024/11/11

Test Laboratory: LCS-SAR Lab

WCDMA II RMC 9538CH Rear side 10mm

DUT: Smart Phone; Type: Blade GT; Serial: A241031015-1

Communication System: UID 0, WCDMA (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.418$ S/m; $\epsilon_r = 39.047$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.85, 7.85, 7.85); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.347W/kg



Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.98 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.365 W/kg

SAR(1 g) = 0.152 W/kg; SAR(10 g) = 0.059 W/kg

Maximum value of SAR (measured) = 0.362 W/kg

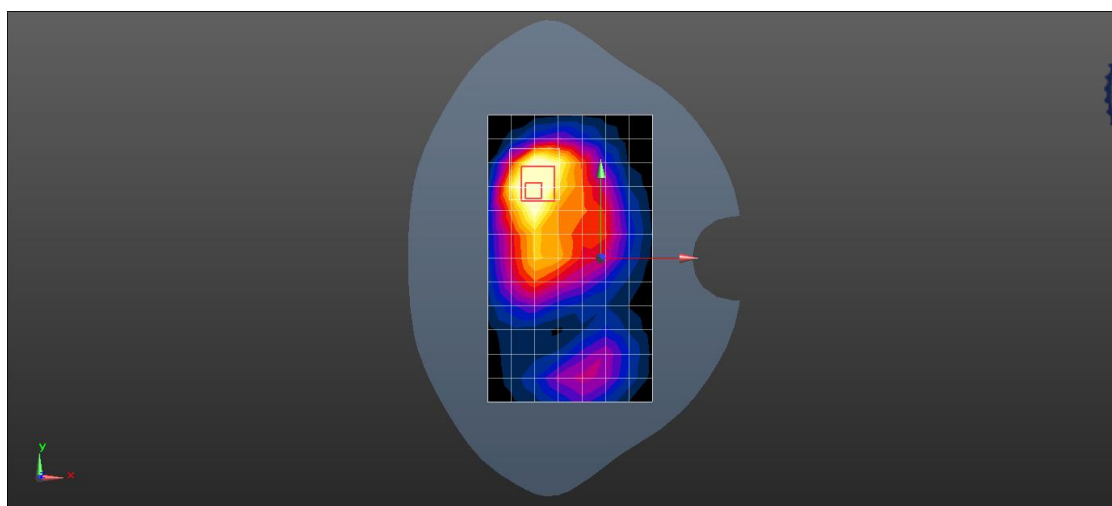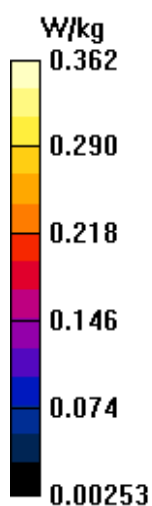

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2024/11/07

Test Laboratory: LCS-SAR Lab

WCDMA IV RMC 1413CH Right Cheek

DUT: Smart Phone; Type: Blade GT; Serial: A241031015-1

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.6 \text{ MHz}$; $\sigma = 1.418 \text{ S/m}$; $\epsilon_r = 40.895$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.16, 8.16, 8.16); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (8x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 2.44 W/kg


Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.525 V/m ; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.175 W/kg

SAR(1 g) = 0.148 W/kg ; SAR(10 g) = 0.100 W/kg

Maximum value of SAR (measured) = 2.65 W/kg

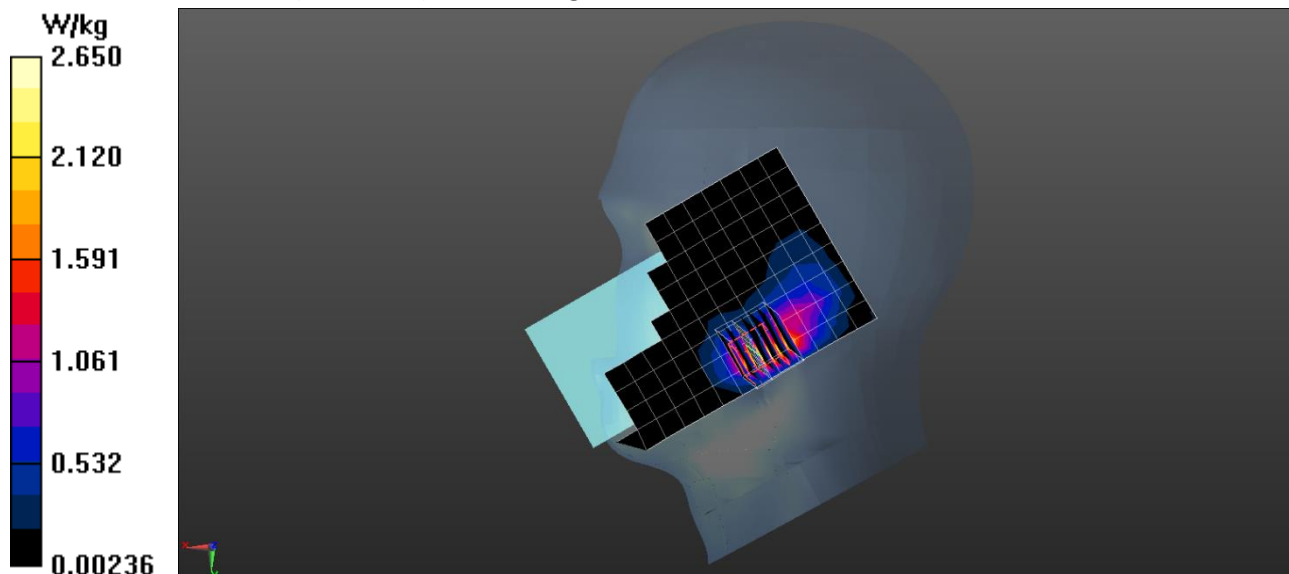

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2024/11/07

Test Laboratory: LCS-SAR Lab
WCDMA IV RMC 1413CH Rear side 10mm

DUT: Smart Phone; Type: Blade GT; Serial: A241031015-1

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.418$ S/m; $\epsilon_r = 40.895$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.16, 8.16, 8.16); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.65 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.14 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.335 W/kg

SAR(1 g) = 0.136 W/kg; SAR(10 g) = 0.078 W/kg

Maximum value of SAR (measured) = 2.80 W/kg

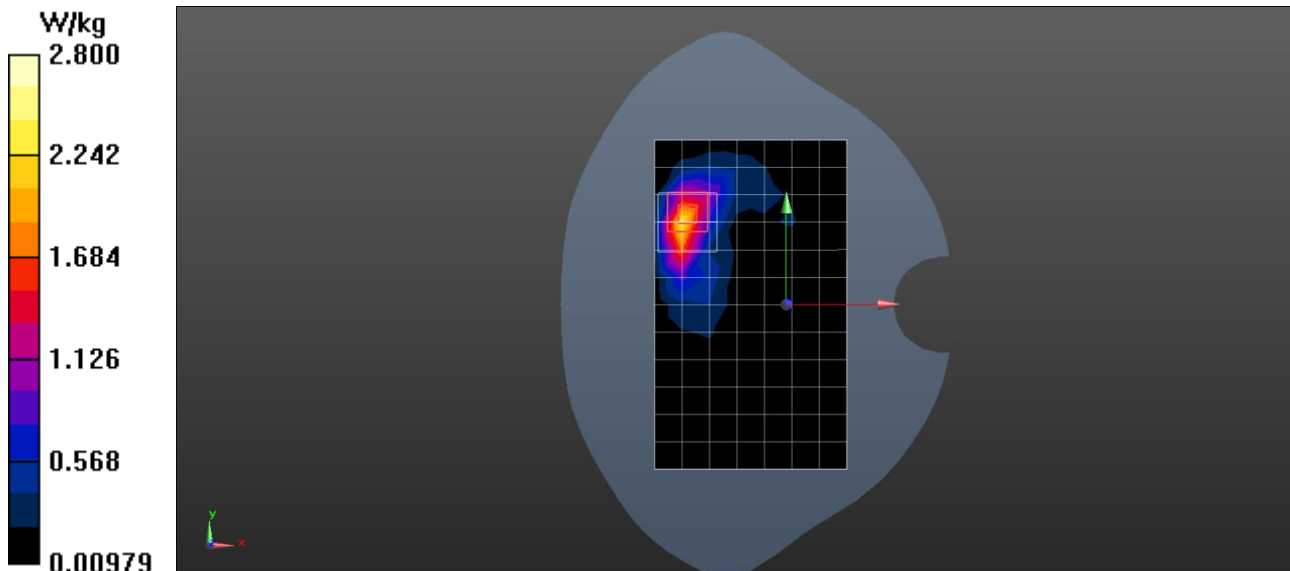

Date: 2024/11/06

Test Laboratory: LCS-SAR Lab
WCDMA V RMC 4132CH Right Cheek

DUT: Smart Phone; Type: Blade GT; Serial: A241031015-1

Communication System: UID 0, WCDMA (0); Frequency: 826.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 826.4 \text{ MHz}$; $\sigma = 0.916 \text{ S/m}$; $\epsilon_r = 42.006$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.26, 9.26, 9.26); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (8x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.188 W/kg


Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.451 V/m ; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.124 W/kg

SAR(1 g) = 0.199 W/kg ; SAR(10 g) = 0.101 W/kg

Maximum value of SAR (measured) = 0.197 W/kg

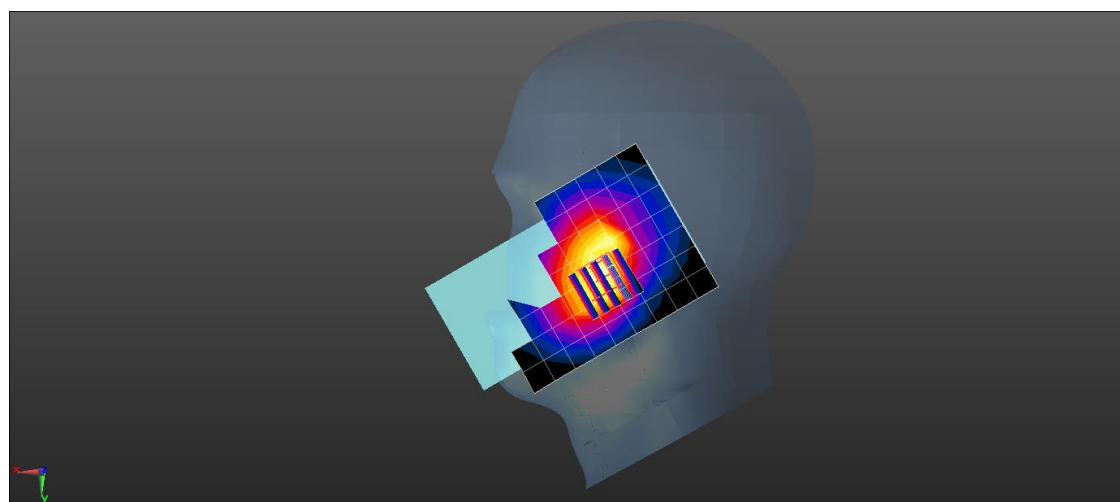

Date: 2024/11/06

Test Laboratory: LCS-SAR Lab
WCDMA V RMC 4132CH Rear side 10mm

DUT: Smart Phone; Type: Blade GT; Serial: A241031015-1

Communication System: UID 0, WCDMA (0); Frequency: 826.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 826.4 \text{ MHz}$; $\sigma = 0.916 \text{ S/m}$; $\epsilon_r = 42.006$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.26, 9.26, 9.26); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.211 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.985 V/m ; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.563 W/kg

SAR(1 g) = 0.302 W/kg ; SAR(10 g) = 0.175 W/kg

Maximum value of SAR (measured) = 0.226 W/kg

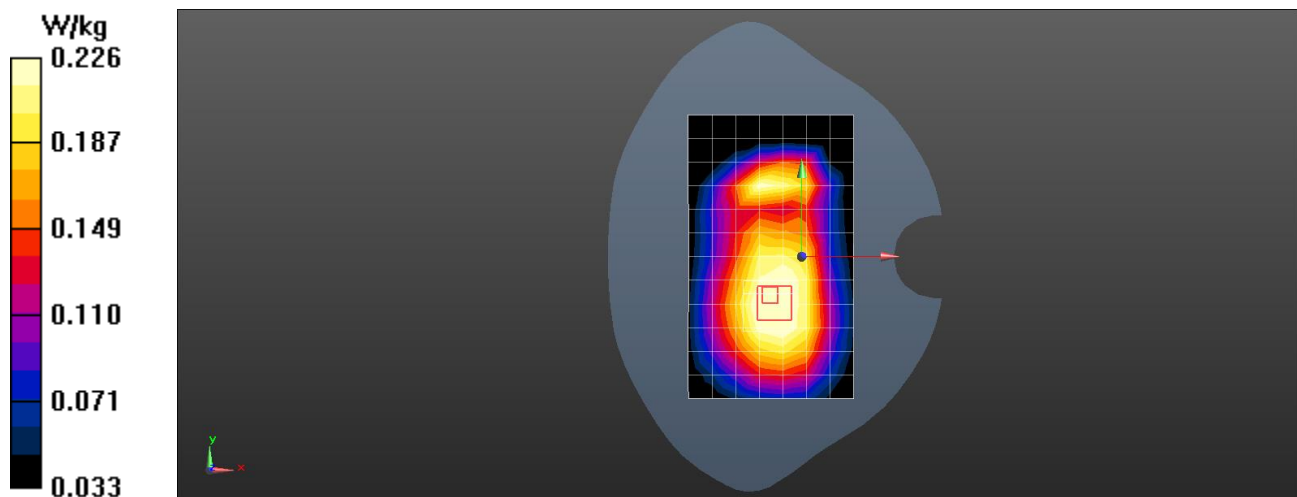

Date: 2024/11/15

Test Laboratory: LCS-SAR Lab
LTE B7 20M QPSK 21100CH 1RB0 Left Cheek

DUT: Smart Phone; Type: Blade GT; Serial: A241031015-1

Communication System: UID 0, LTE-FDD (0); Frequency: 2535.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535.5$ MHz; $\sigma = 1.945$ S/m; $\epsilon_r = 40.032$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.17, 7.17, 7.17); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (8x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.366W/kg



Configuration/Head /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.685 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.652 W/kg

SAR(1 g) = 0.529 W/kg; SAR(10 g) = 0.342W/kg

Maximum value of SAR (measured) = 0.385 W/kg

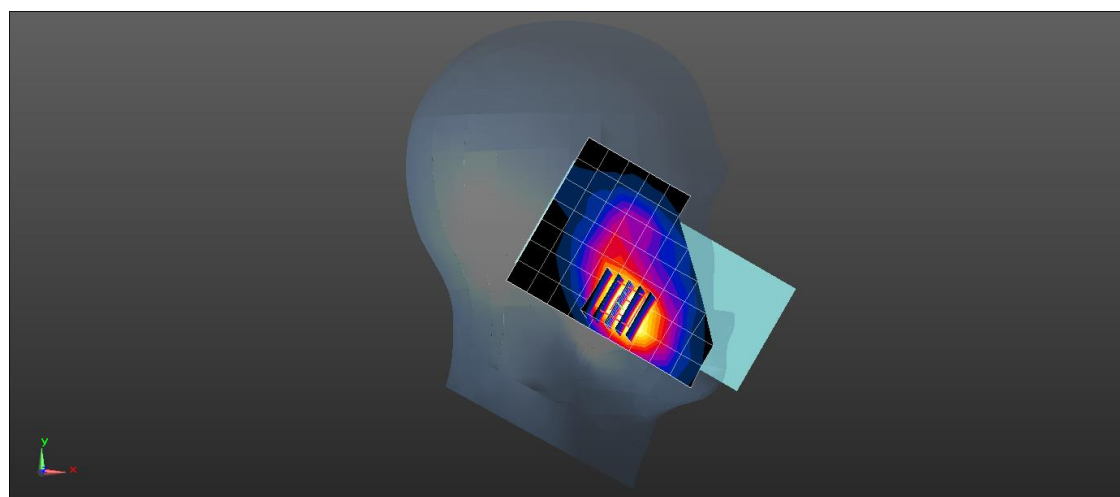

Date: 2024/11/15

Test Laboratory: LCS-SAR Lab
LTE B7 20M QPSK 21100CH 1RB0 Rear side 10mm

DUT: Smart Phone; Type: Blade GT; Serial: A241031015-1



Communication System: UID 0, LTE-FDD (0); Frequency: 2535.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535.5$ MHz; $\sigma = 1.945$ S/m; $\epsilon_r = 40.032$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.17, 7.17, 7.17); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (10x15x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.354 W/kg

Configuration/ Body /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value =13.52 V/m; Power Drift = 0.16 dB
Peak SAR (extrapolated) = 0.16 W/kg
SAR(1 g) = 0.669 W/kg; SAR(10 g) = 0.425 W/kg
Maximum value of SAR (measured) = 0.376 W/kg

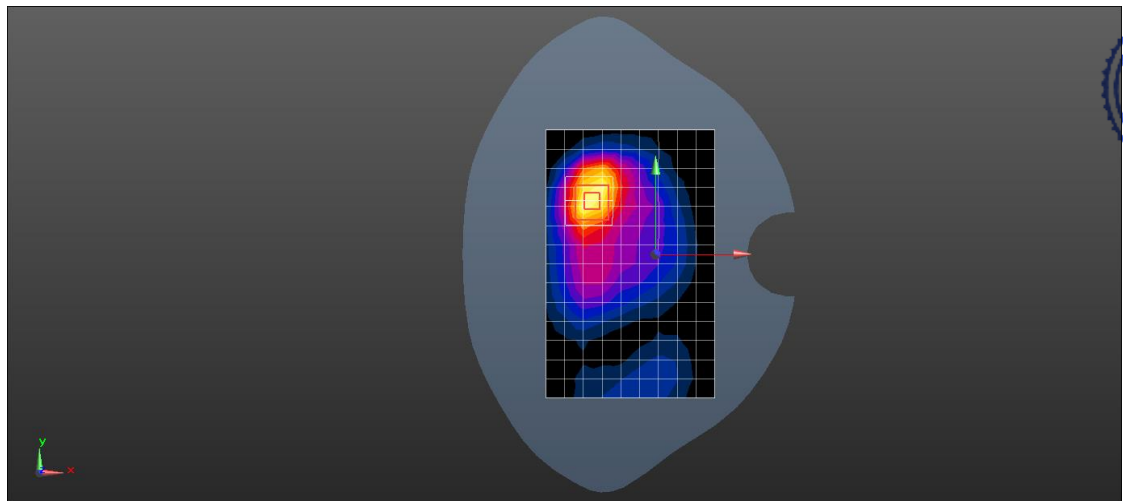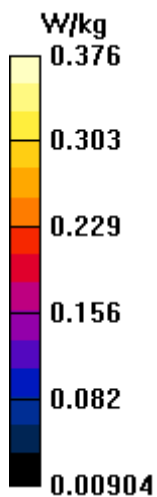

Date: 2024/11/06

Test Laboratory: LCS-SAR Lab
LTE B19 15M QPSK 24075CH 1RB0 Left Cheek

DUT: Smart Phone; Type: Blade GT; Serial: A241031015-1

Communication System: UID 0, LTE-FDD (0); Frequency: 837.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 837.5$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 40.709$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.26, 9.26, 9.26); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (10x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.244 W/kg

Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.524 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 0.412 W/kg
SAR(1 g) = 0.199 W/kg; SAR(10 g) = 0.084 W/kg

Maximum value of SAR (measured) = 0.275 W/kg

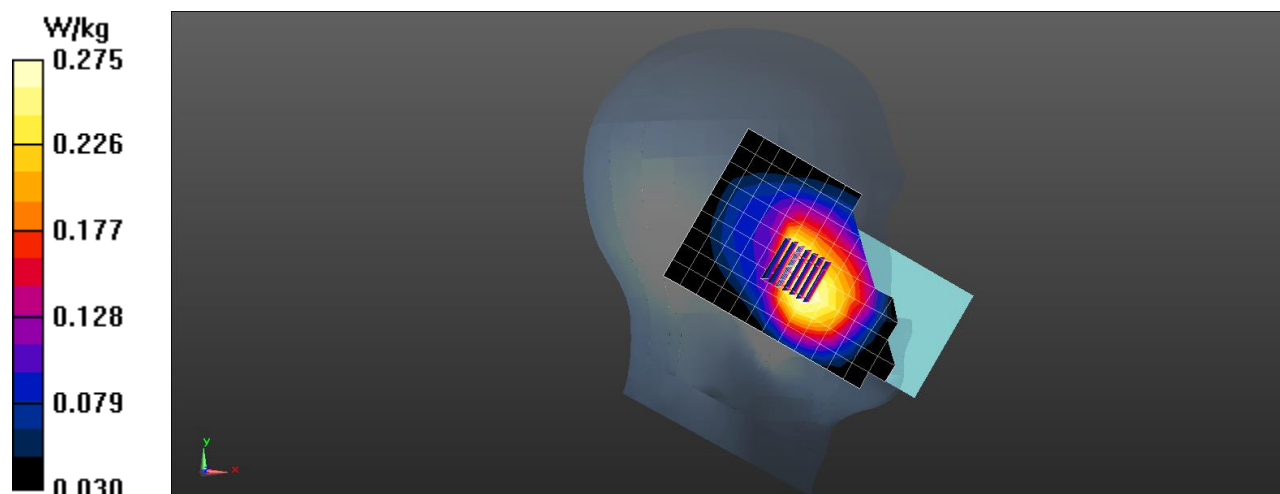

Date: 2024/11/06

Test Laboratory: LCS-SAR Lab

LTE B19 15M QPSK 24075CH 1RB0 Rear side 10mm

DUT: Smart Phone; Type: Blade GT; Serial: A241031015-1

Communication System: UID 0, LTE-FDD (0); Frequency: 837.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837.5$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 40.709$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.26, 9.26, 9.26); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (10x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.321 W/kg



Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.02 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.785 W/kg

SAR(1 g) = 0.333 W/kg; SAR(10 g) = 0.198 W/kg

Maximum value of SAR (measured) = 0.345 W/kg

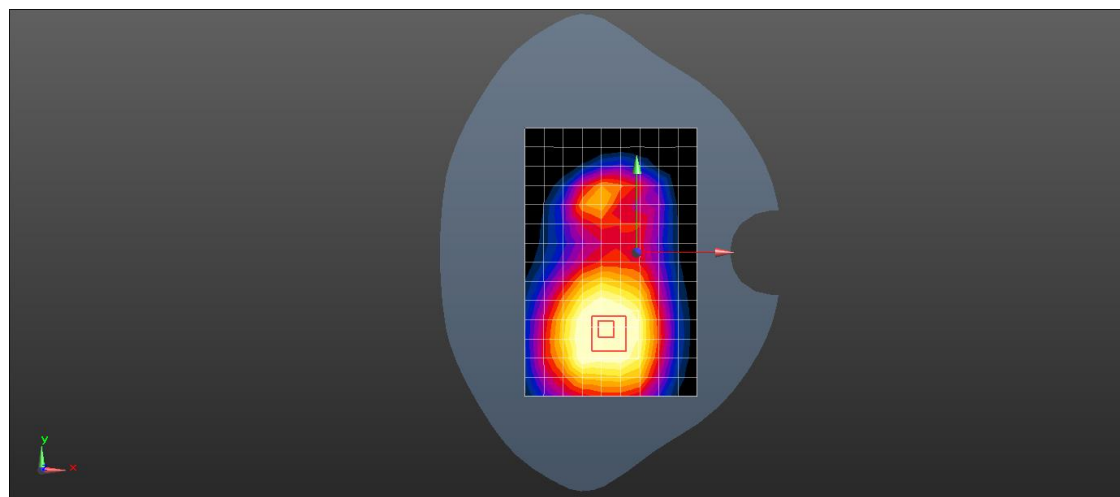

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2024/11/11

Test Laboratory: LCS-SAR Lab

LTE B25 20M QPSK 26590CH 1RB49 Right Cheek

DUT: Smart Phone; Type: Blade GT; Serial: A241031015-1

Communication System: UID 0, LTE-FDD (0); Frequency: 1905 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1905$ MHz; $\sigma = 1.433$ S/m; $\epsilon_r = 39.101$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.85, 7.85, 7.85); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (10x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.36 W/kg


Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.254 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.133 W/kg

SAR(1 g) = 0.206 W/kg; SAR(10 g) = 0.065 W/kg

Maximum value of SAR (measured) = 1.48 W/kg

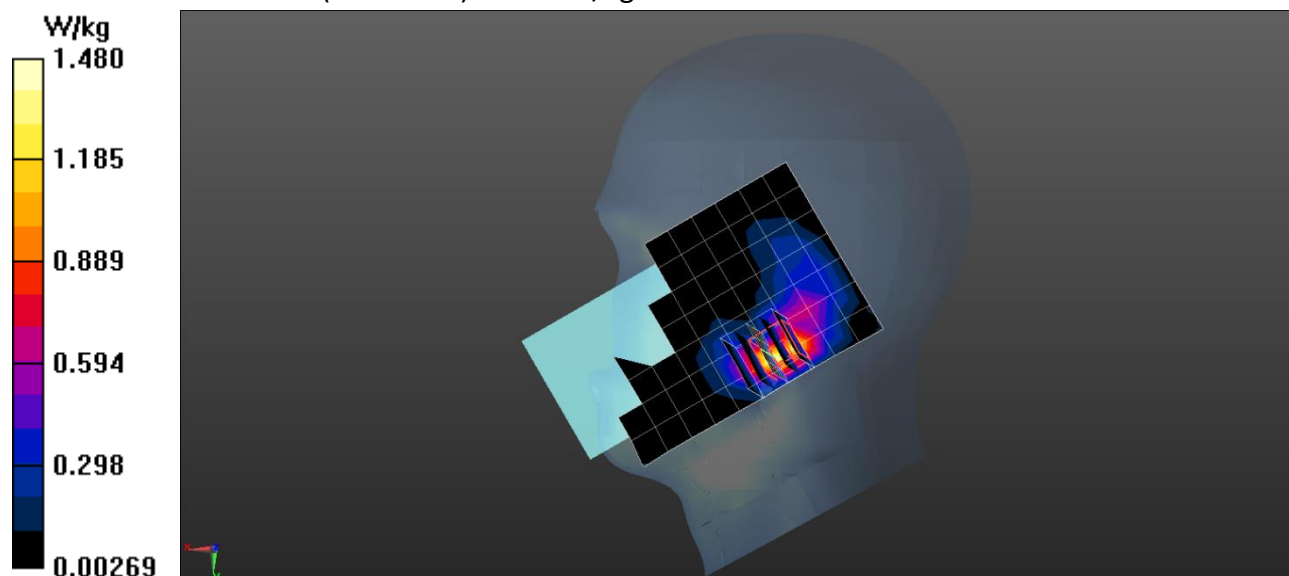

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2024/11/11

Test Laboratory: LCS-SAR Lab
LTE B25 20M QPSK 26590CH 1RB49 Rear side 10mm

DUT: Smart Phone; Type: Blade GT; Serial: A241031015-1


Communication System: UID 0, LTE-FDD (0); Frequency: 1905 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1905$ MHz; $\sigma = 1.433$ S/m; $\epsilon_r = 39.101$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.85, 7.85, 7.85); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (10x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 5.89 W/kg

Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 6.653 V/m; Power Drift = -0.17 dB
Peak SAR (extrapolated) = 0.241 W/kg
SAR(1 g) = 0.219 W/kg; SAR(10 g) = 0.145 W/kg
Maximum value of SAR (measured) = 6.01 W/kg

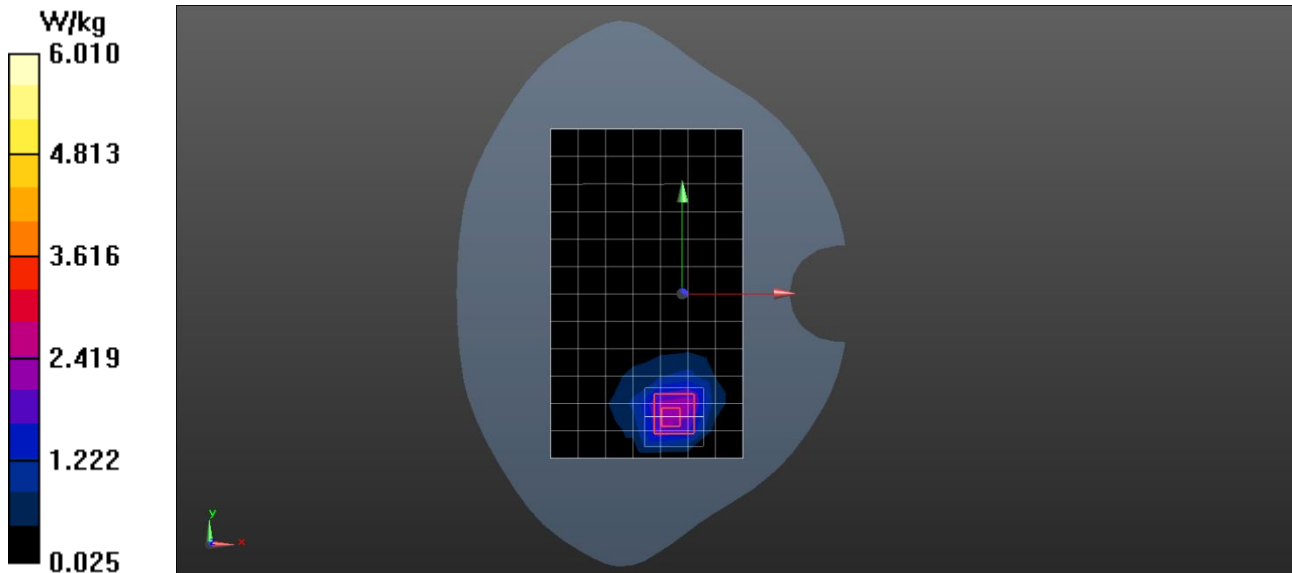

Date: 2024/11/15

Test Laboratory: LCS-SAR Lab

LTE B26 15M QPSK 26865CH 1RB38 Left Cheek

DUT: Smart Phone; Type: Blade GT; Serial: A241031015-1

Communication System: UID 0, LTE-TDD (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 831.5 \text{ MHz}$; $\sigma = 0.917 \text{ S/m}$; $\epsilon_r = 41.913$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.26, 9.26, 9.26); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (10x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 2.25 W/kg


Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 0.124 V/m ; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.325 W/kg

SAR(1 g) = 0.144 W/kg ; SAR(10 g) = 0.076 W/kg

Maximum value of SAR (measured) = 2.31 W/kg

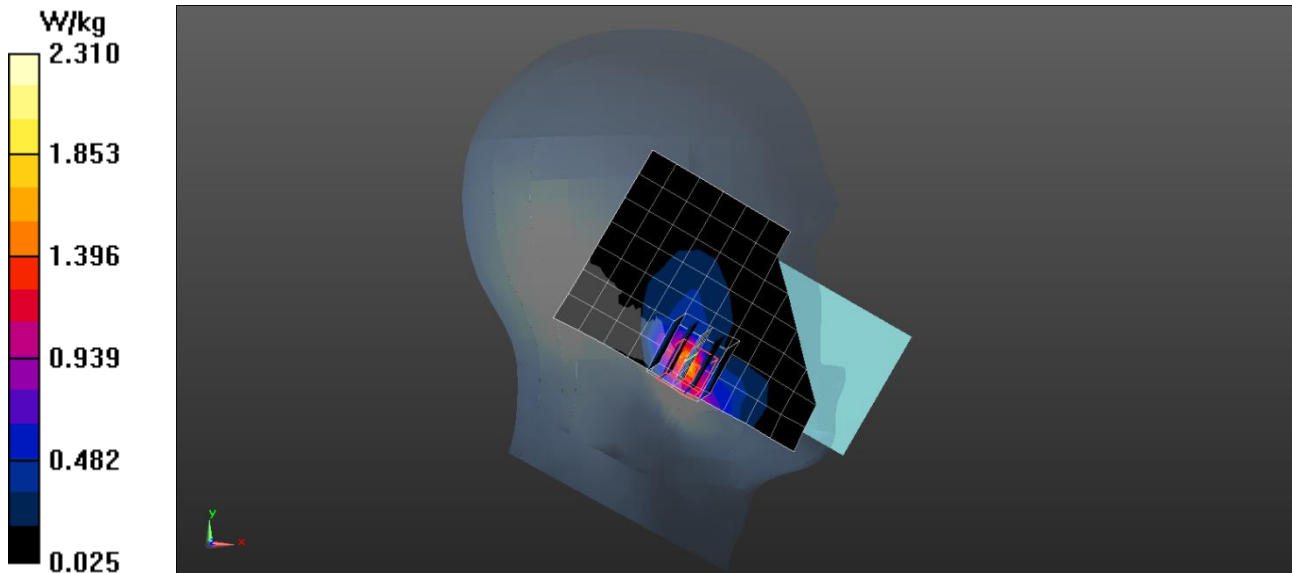

Date: 2024/11/15

Test Laboratory: LCS-SAR Lab
LTE B26 15M QPSK 26865CH 1RB38 Rear side 10mm

DUT: Smart Phone; Type: Blade GT; Serial: A241031015-1

Communication System: UID 0, LTE-TDD (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.917$ S/m; $\epsilon_r = 41.913$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.26, 9.26, 9.26); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (10x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 3.11W/kg

Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.545 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.145W/kg

SAR(1 g) = 0.254 W/kg; SAR(10 g) = 0.128 W/kg

Maximum value of SAR (measured) = 3.25 W/kg



Date: 2024/11/15

Test Laboratory: LCS-SAR Lab

LTE B38 20M QPSK 38150CH 1RB99 Left Cheek

DUT: Smart Phone; Type: Blade GT; Serial: A241031015-1

Communication System: UID 0, LTE-TDD (0); Frequency: 2610 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2610$ MHz; $\sigma = 1.935$ S/m; $\epsilon_r = 40.285$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.17, 7.17, 7.17); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (10x14x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.035 W/kg


Configuration/Head /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.325 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.156 W/kg

SAR(1 g) = 0.546 W/kg; SAR(10 g) = 0.284 W/kg

Maximum value of SAR (measured) = 0.044 W/kg

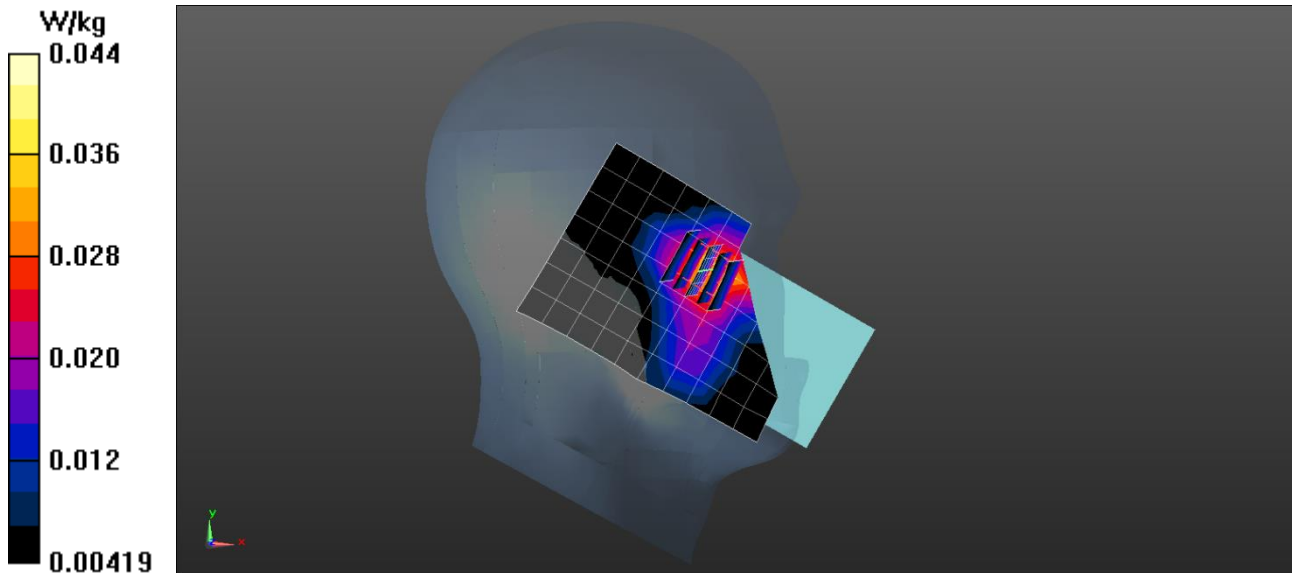

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2024/11/15

Test Laboratory: LCS-SAR Lab
LTE B38 20M QPSK 38150CH 1RB99 Rear side 10mm

DUT: Smart Phone; Type: Blade GT; Serial: A241031015-1


Communication System: UID 0, LTE-TDD (0); Frequency: 2610 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2610 \text{ MHz}$; $\sigma = 1.935 \text{ S/m}$; $\epsilon_r = 40.285$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.17, 7.17, 7.17); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (10x15x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
Maximum value of SAR (measured) = 0.428 W/kg

Configuration/ Body /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 5.248 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 0.211 W/kg
SAR(1 g) = 0.653 W/kg; SAR(10 g) = 0.398 W/kg
Maximum value of SAR (measured) = 0.441 W/kg

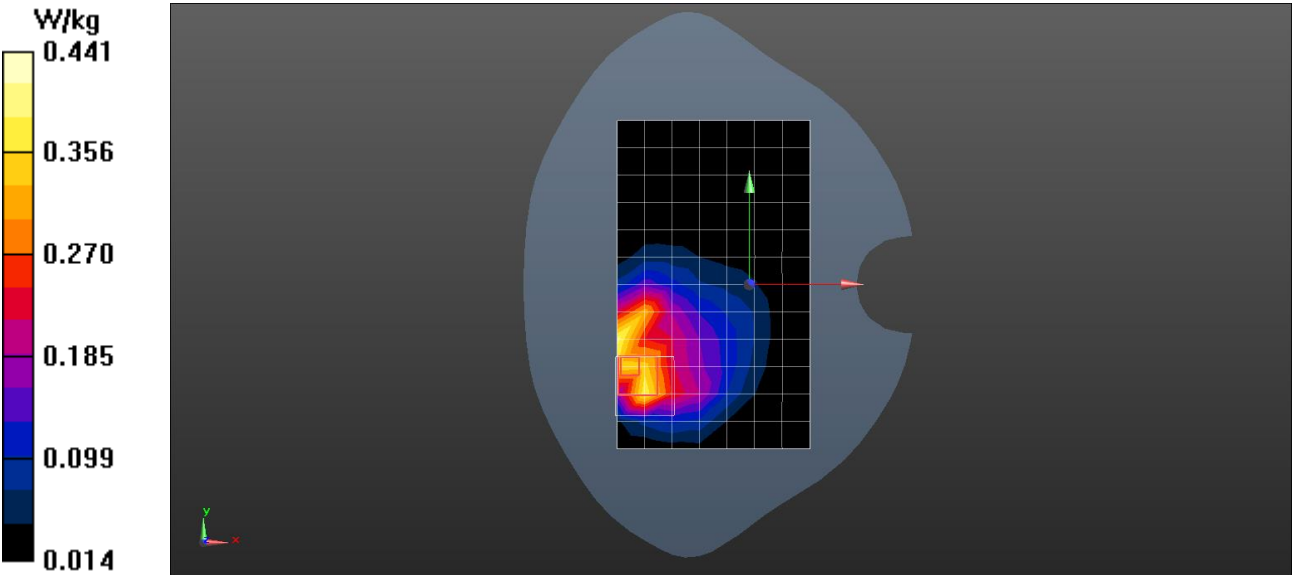

Date: 2024/11/15

Test Laboratory: LCS-SAR Lab

LTE B41 20M QPSK 40590CH 1RB99 Left Cheek

DUT: Smart Phone; Type: Blade GT; Serial: A241031015-1

Communication System: UID 0, LTE-TDD (0); Frequency: 2590 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2590$ MHz; $\sigma = 1.973$ S/m; $\epsilon_r = 38.981$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.17, 7.17, 7.17); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (10x14x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.130 W/kg



Configuration/Head /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.254 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.298 W/kg

SAR(1 g) = 0.512 W/kg; SAR(10 g) = 0.365 W/kg

Maximum value of SAR (measured) = 0.141 W/kg

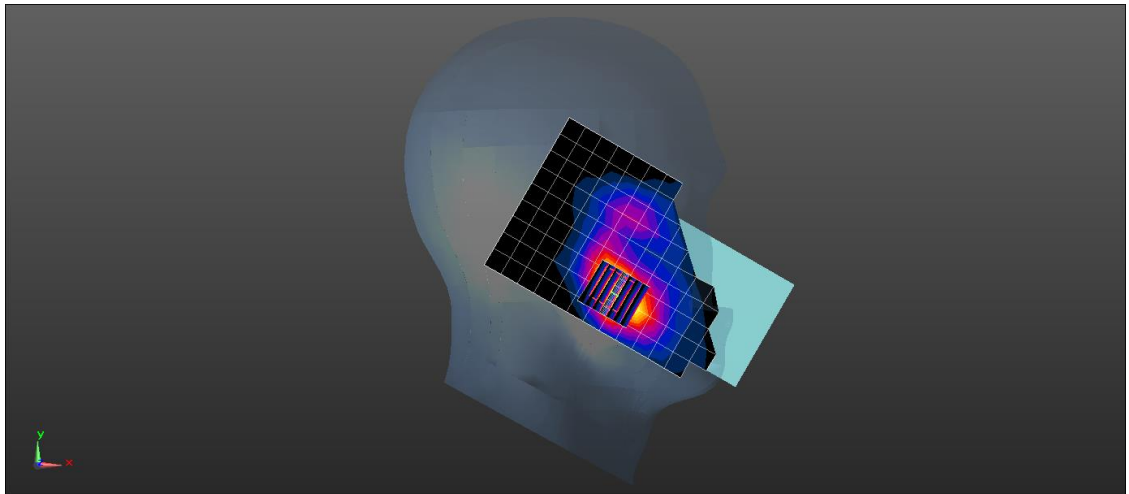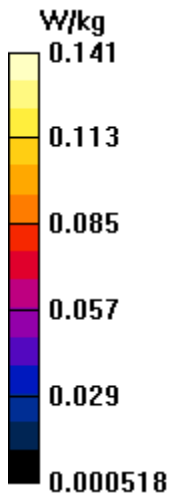

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2024/11/15

Test Laboratory: LCS-SAR Lab
LTE B41 20M QPSK 40590CH 1RB99 Rear side 10mm

DUT: Smart Phone; Type: Blade GT; Serial: A241031015-1


Communication System: UID 0, LTE-TDD (0); Frequency: 2590 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2590$ MHz; $\sigma = 1.973$ S/m; $\epsilon_r = 38.981$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.17, 7.17, 7.17); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (10x15x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.135 W/kg

Configuration/ Body /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 3.254 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 0.175 W/kg
SAR(1 g) = 0.603 W/kg; SAR(10 g) = 0.444 W/kg
Maximum value of SAR (measured) = 0.160 W/kg

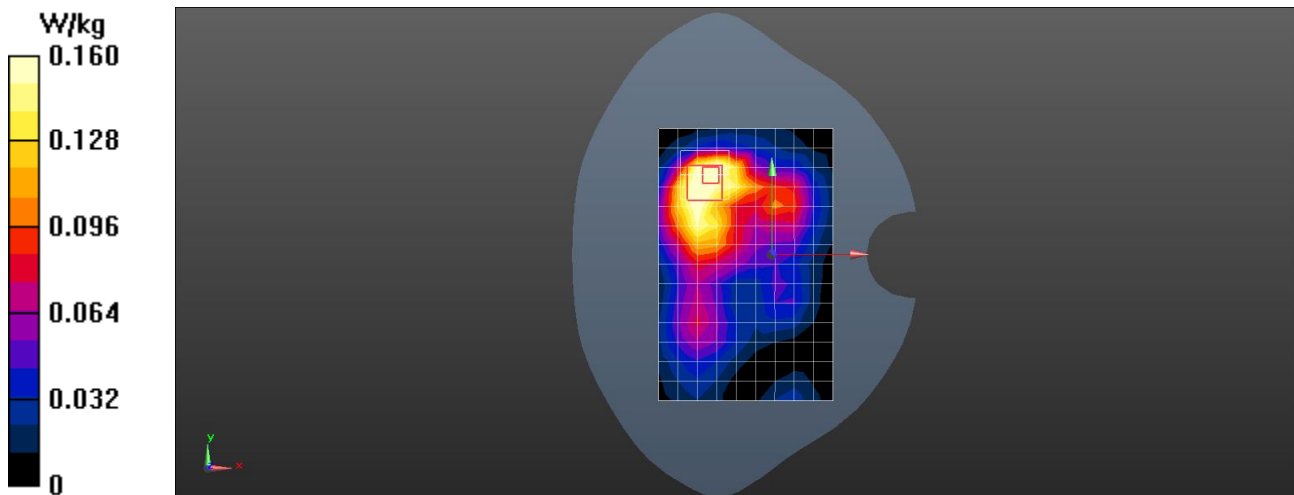

Date: 2024/11/07

Test Laboratory: LCS-SAR Lab

LTE B66 20M QPSK 132322CH 1RB0 Left Cheek

DUT: Smart Phone; Type: Blade GT; Serial: A241031015-1

Communication System: UID 0, LTE-FDD (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745 \text{ MHz}$; $\sigma = 1.387 \text{ S/m}$; $\epsilon_r = 40.944$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.16, 8.16, 8.16); Calibrated: 2023/11/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (8x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.329 W/kg



Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.698 V/m ; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.298 W/kg

SAR(1 g) = 0.299 W/kg ; SAR(10 g) = 0.148 W/kg

Maximum value of SAR (measured) = 0.358 W/kg

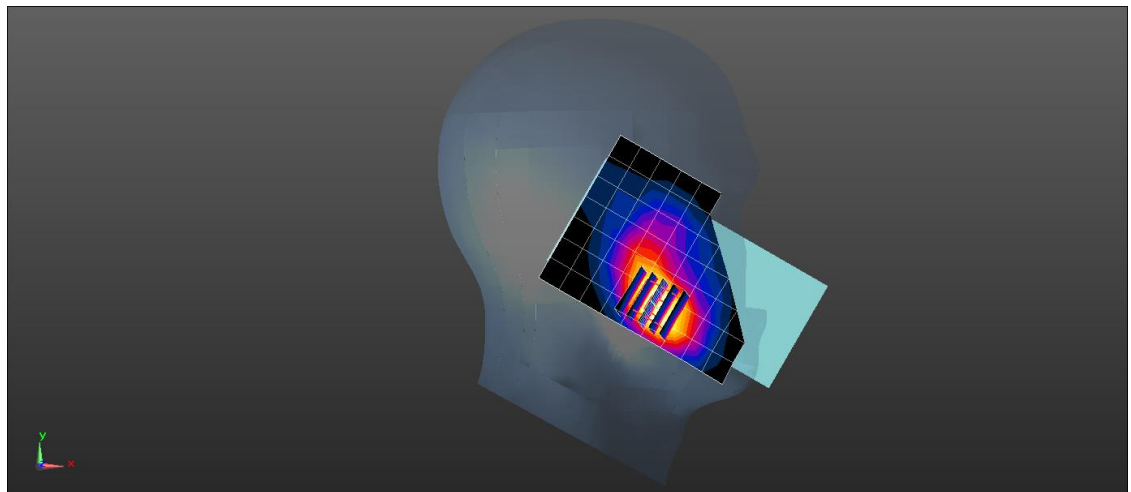

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2024/11/07

Test Laboratory: LCS-SAR Lab
LTE B66 20M QPSK 132322CH 1RB0 Rear Side

DUT: Smart Phone; Type: Blade GT; Serial: A241031015-1


Communication System: UID 0, LTE-FDD (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1745$ MHz; $\sigma = 1.387$ S/m; $\epsilon_r = 40.944$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.16, 8.16, 8.16); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.310 W/kg

Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.508 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 0.698 W/kg
SAR(1 g) = 0.259 W/kg; SAR(10 g) = 0.133 W/kg
Maximum value of SAR (measured) = 0.313 W/kg

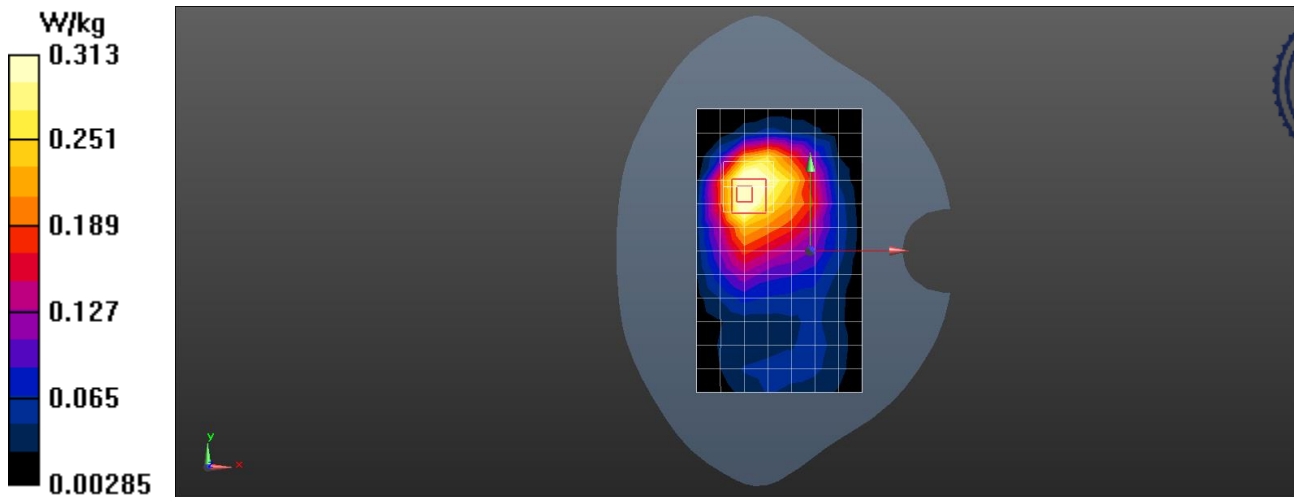

Date:2024/11/13

Test Laboratory: LCS-SAR Lab
WIFI 2.4G 802.11b 1CH Left Cheek ANT1

DUT: Smart Phone; Type: Blade GT; Serial: A241031015-1


Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.811 \text{ S/m}$; $\epsilon_r = 39.283$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.42, 7.42, 7.42); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (10x14x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
Maximum value of SAR (measured) = 0.742 W/kg

Configuration/Head /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 8.412 V/m ; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 1.79 W/kg
SAR(1 g) = 0.487 W/kg ; SAR(10 g) = 0.265 W/kg
Maximum value of SAR (measured) = 0.765 W/kg

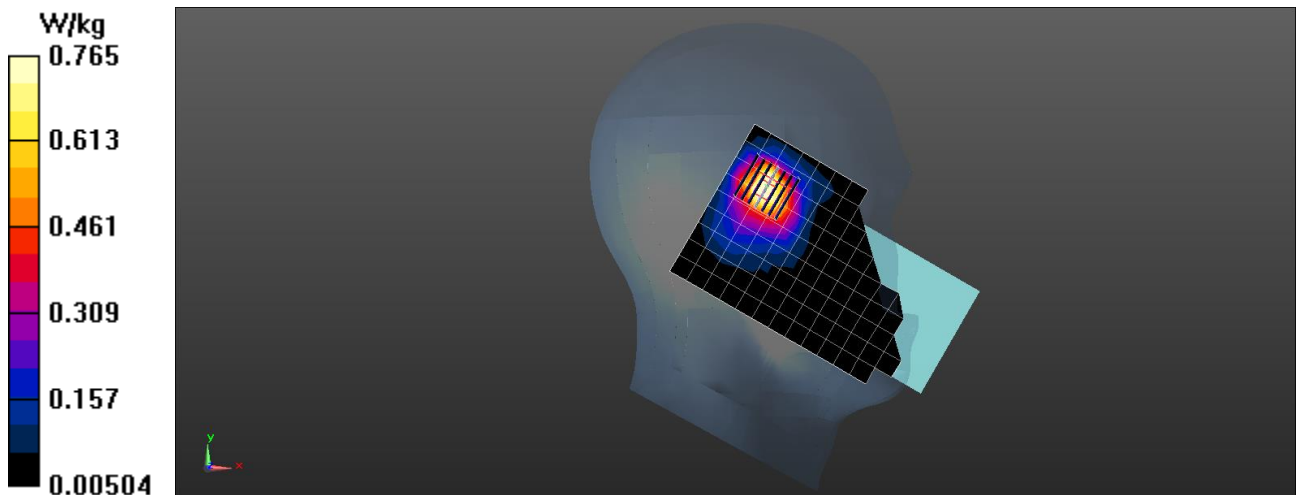

Date: 2024/11/13

Test Laboratory: LCS-SAR Lab

WIFI 2.4G 802.11b 1CH Rear side 10mm ANT1

DUT: Smart Phone; Type: Blade GT; Serial: A241031015-1

Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.811 \text{ S/m}$; $\epsilon_r = 39.283$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.42, 7.42, 7.42); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (10x15x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.244 W/kg


Configuration/ Body /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.326 V/m ; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.487 W/kg

SAR(1 g) = 0.523 W/kg ; SAR(10 g) = 0.358 W/kg

Maximum value of SAR (measured) = 0.262 W/kg

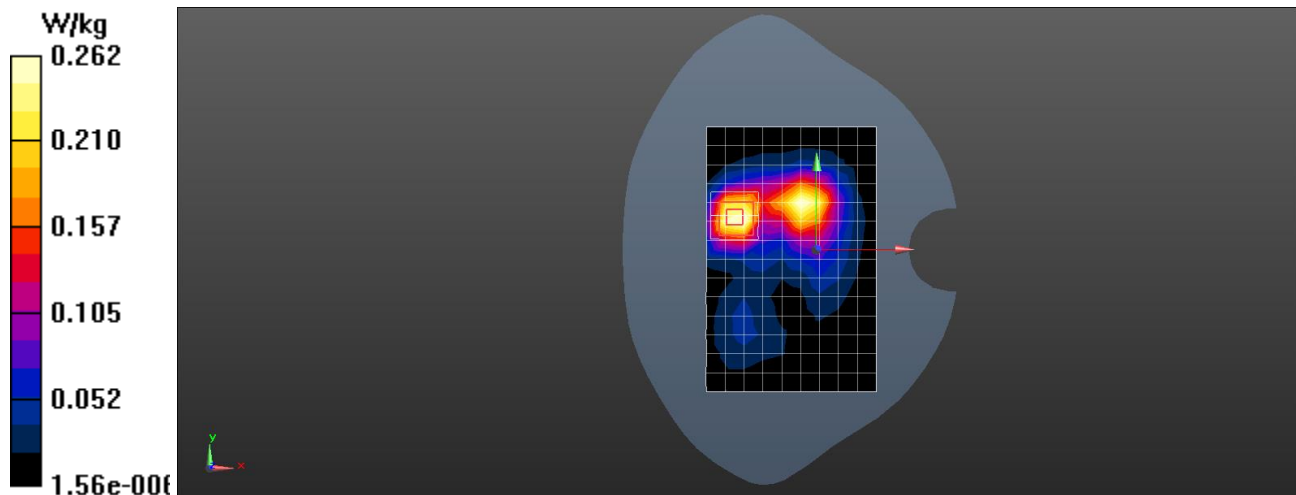

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2024/11/13

Test Laboratory: LCS-SAR Lab
WIFI 2.4G 802.11b 6CH Left Cheek ANT2

DUT: Smart Phone; Type: Blade GT; Serial: A241031015-1

Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.824 \text{ S/m}$; $\epsilon_r = 39.228$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.42, 7.42, 7.42); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (10x14x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.398 W/kg



Configuration/Head /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.524 V/m ; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.211 W/kg ; SAR(10 g) = 0.048 W/kg

Maximum value of SAR (measured) = 0.425 W/kg

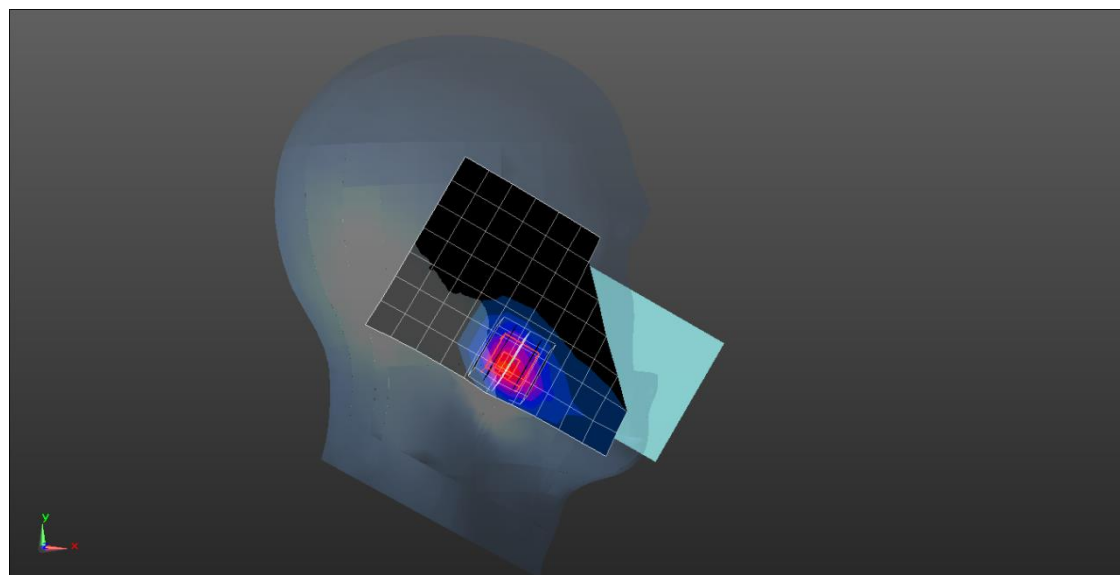

Date: 2024/11/13

Test Laboratory: LCS-SAR Lab

WIFI 2.4G 802.11b 6CH Rear side 10mm ANT2

DUT: Smart Phone; Type: Blade GT; Serial: A241031015-1

Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.824 \text{ S/m}$; $\epsilon_r = 39.228$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.42, 7.42, 7.42); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (10x15x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 5.22 W/kg


Configuration/ Body /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.214 V/m ; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.536 W/kg

SAR(1 g) = 0.168 W/kg ; SAR(10 g) = 0.108 W/kg

Maximum value of SAR (measured) = 5.36 W/kg

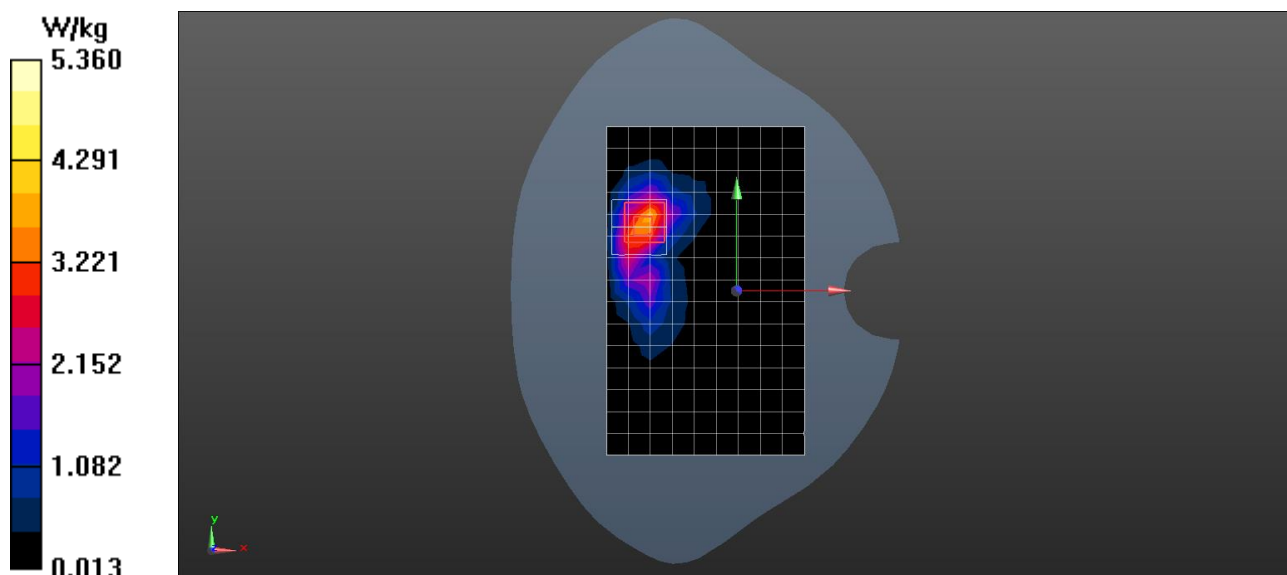

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2024/11/13

Test Laboratory: LCS-SAR Lab

BT DH5 78CH Left Cheek ANT1

DUT: Smart Phone; Type: Blade GT; Serial: A241031015-1

Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2480 \text{ MHz}$; $\sigma = 1.754 \text{ S/m}$; $\epsilon_r = 40.112$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.42, 7.42, 7.42); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (10x14x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
Maximum value of SAR (measured) = 1.22 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.234 V/m ; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.210 W/kg

SAR(1 g) = 0.168 W/kg ; SAR(10 g) = 0.078 W/kg

Maximum value of SAR (measured) = 1.58 W/kg

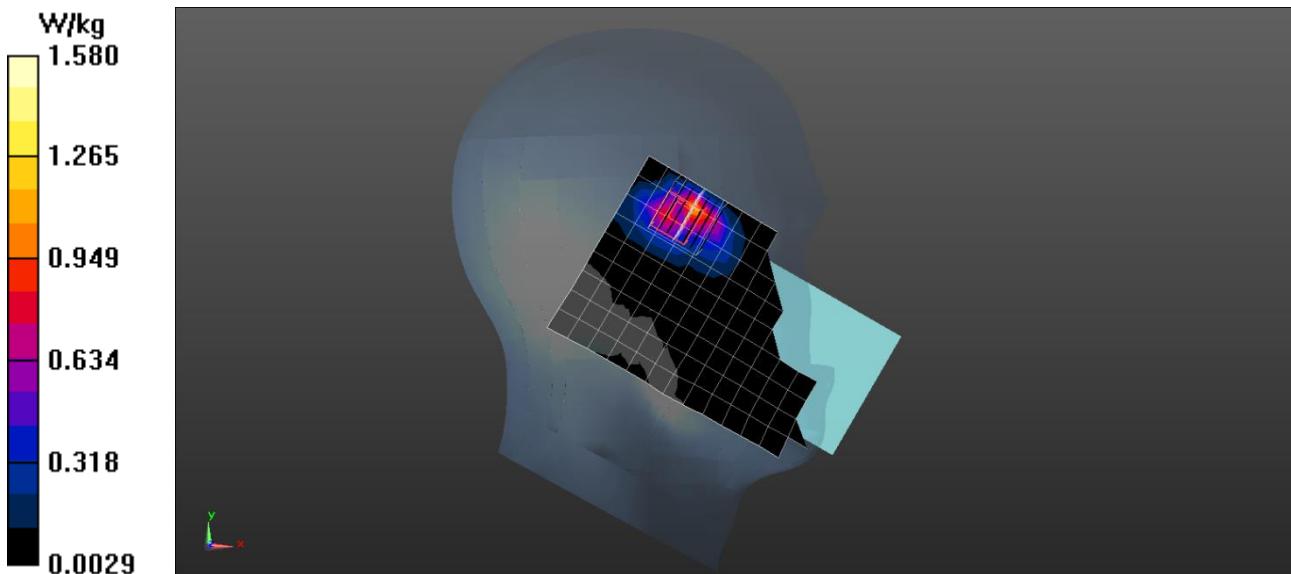

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2024/11/18

Test Laboratory: LCS-SAR Lab

WIFI 5.2G 802.11n 40M 38CH Left Cheek ANT1

DUT: Smart Phone; Type: Blade GT; Serial: A241031015-1

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5190 MHz; Duty Cycle: 1:1.004

Medium parameters used: $f = 5190 \text{ MHz}$; $\sigma = 4.611 \text{ S/m}$; $\epsilon_r = 36.133$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.38, 5.38, 5.38); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (11x17x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.128 W/kg



Configuration/Head /Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 1.245 V/m ; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.225 W/kg

SAR(1 g) = 0.192 W/kg ; SAR(10 g) = 0.131 W/kg

Maximum value of SAR (measured) = 0.162 W/kg

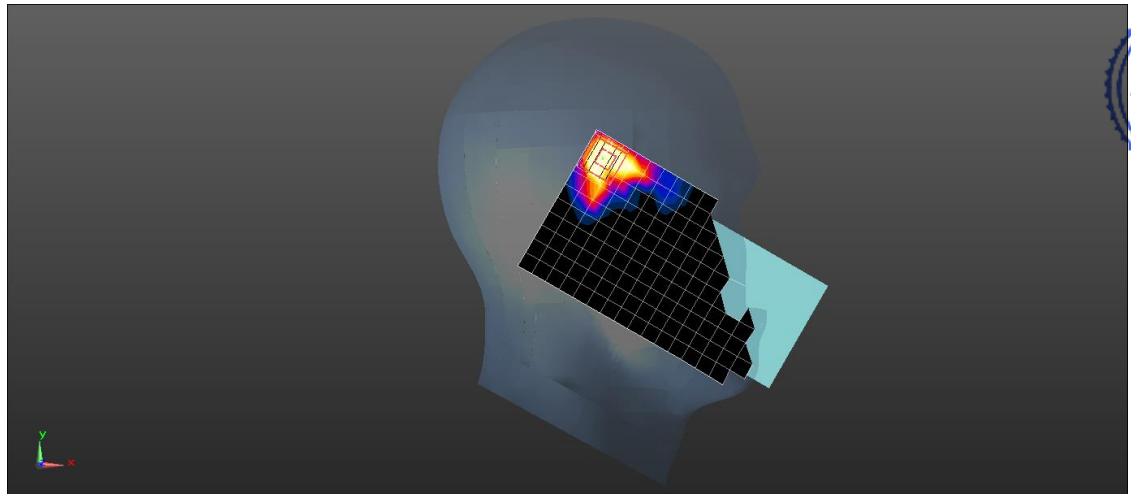

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2024/11/18

Test Laboratory: LCS-SAR Lab

WIFI 5.2G 802.11n 40M 38CH Rear side 10mm ANT1

DUT: Smart Phone; Type: Blade GT; Serial: A241031015-1

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5190 MHz; Duty Cycle: 1:1.004

Medium parameters used: $f = 5190 \text{ MHz}$; $\sigma = 4.611 \text{ S/m}$; $\epsilon_r = 36.133$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.38, 5.38, 5.38); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (11x18x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.133 W/kg



Configuration/ Body /Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 2.118 V/m ; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.471 W/kg

SAR(1 g) = 0.161 W/kg ; SAR(10 g) = 0.085 W/kg

Maximum value of SAR (measured) = 0.153 W/kg

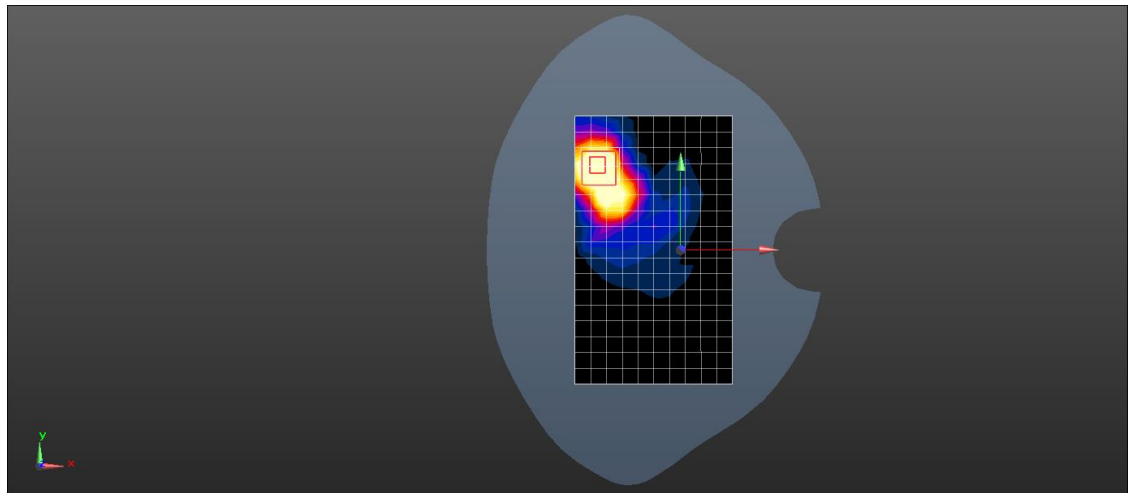

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2024/11/18

Test Laboratory: LCS-SAR Lab
WIFI 5.2G 802.11ac 20M 40CH Left Cheek ANT2

DUT: Smart Phone; Type: Blade GT; Serial: A241031015-1

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5200 MHz;Duty Cycle: 1:1.267
Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.669 \text{ S/m}$; $\epsilon_r = 36.985$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.38, 5.38, 5.38); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (11x17x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.197 W/kg


Configuration/Head /Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 3.251 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.145 W/kg

SAR(1 g) = 0.122 W/kg; SAR(10 g) = 0.051 W/kg

Maximum value of SAR (measured) = 0.214 W/kg

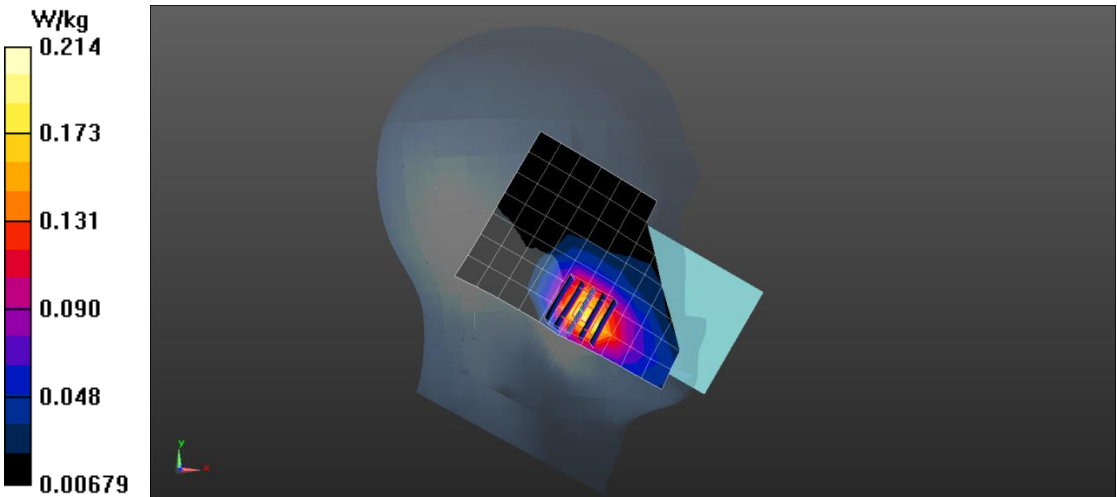

Date: 2024/11/18

Test Laboratory: LCS-SAR Lab

WIFI 5.2G 802.11ac 20M 40CH Rear side 10mm ANT2

DUT: Smart Phone; Type: Blade GT; Serial: A241031015-1

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5200 MHz; Duty Cycle: 1:1.267

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.669 \text{ S/m}$; $\epsilon_r = 36.985$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.38, 5.38, 5.38); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (11x18x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 3.28 W/kg


Configuration/ Body /Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 3.336 V/m ; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.192 W/kg

SAR(1 g) = 0.136 W/kg ; SAR(10 g) = 0.044 W/kg

Maximum value of SAR (measured) = 3.56 W/kg

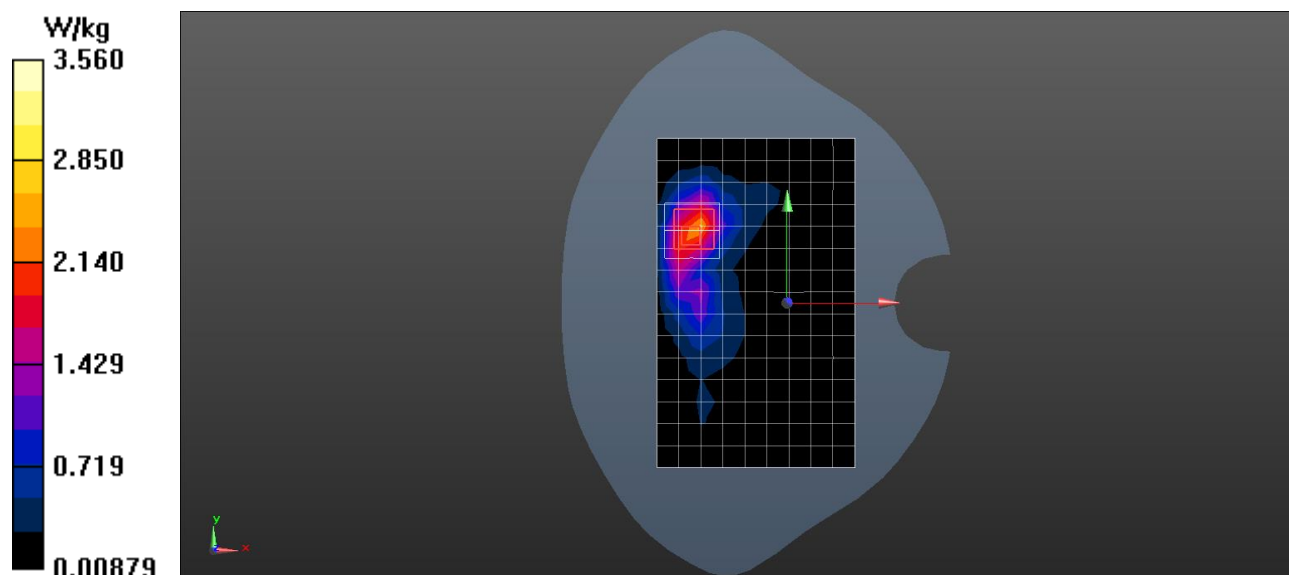

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2024/11/18

Test Laboratory: LCS-SAR Lab

WIFI 5.8G 802.11n 40M 159CH Left Cheek ANT1

DUT: Smart Phone; Type: Blade GT; Serial: A241031015-1

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5795 MHz; Duty Cycle: 1:1.062

Medium parameters used: $f = 5795 \text{ MHz}$; $\sigma = 5.283 \text{ S/m}$; $\epsilon_r = 35.266$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.88, 4.88, 4.88); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Head /Area Scan (11x17x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.088 W/kg



Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 2.014 V/m ; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.198 W/kg

SAR(1 g) = 0.078 W/kg ; SAR(10 g) = 0.036 W/kg

Maximum value of SAR (measured) = 0.101 W/kg

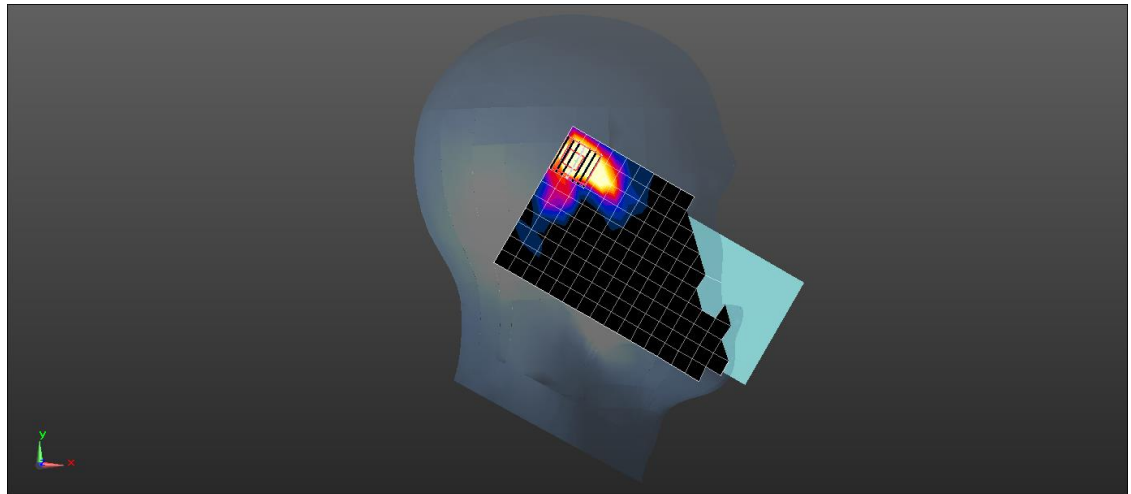

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2024/11/18

Test Laboratory: LCS-SAR Lab

WIFI 5.8G 802.11n 40M 159CH Rear side 10mm ANT1

DUT: Smart Phone; Type: Blade GT; Serial: A241031015-1

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5795 MHz; Duty Cycle: 1:1.062

Medium parameters used: $f = 5795 \text{ MHz}$; $\sigma = 5.283 \text{ S/m}$; $\epsilon_r = 35.266$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.88, 4.88, 4.88); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (11x18x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.202 W/kg



Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 0.785 V/m ; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.322 W/kg

SAR(1 g) = 0.066 W/kg ; SAR(10 g) = 0.047 W/kg

Maximum value of SAR (measured) = 0.219 W/kg

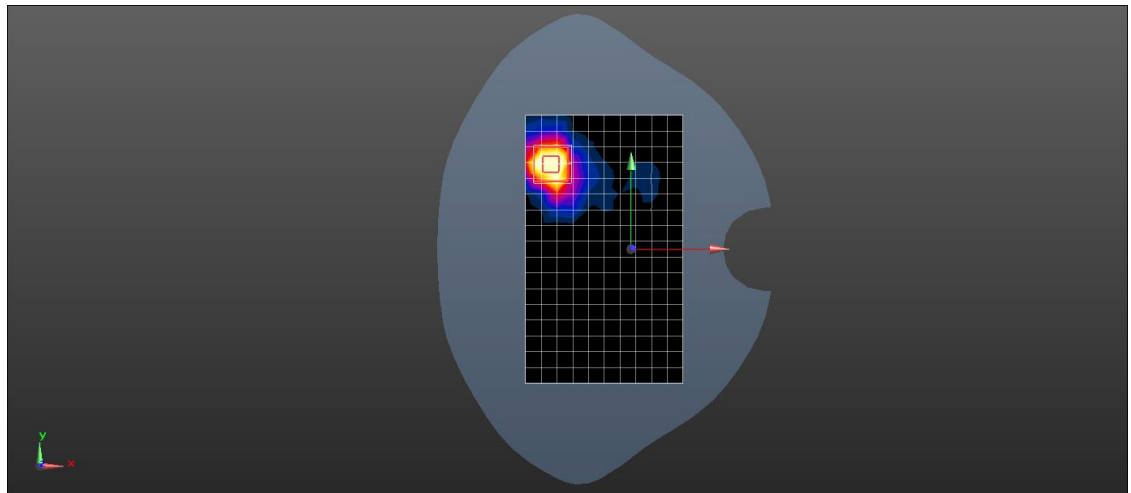

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2024/11/18

Test Laboratory: LCS-SAR Lab

WIFI 5.8G 802.11ac 20M 165CH Left Cheek ANT2

DUT: Smart Phone; Type: Blade GT; Serial: A241031015-1

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5825 MHz; Duty Cycle: 1:1.267

Medium parameters used: $f = 5825 \text{ MHz}$; $\sigma = 5.257 \text{ S/m}$; $\epsilon_r = 35.231$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.88, 4.88, 4.88); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Head /Area Scan (11x17x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.748 W/kg


Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 3.854 V/m ; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.147 W/kg

SAR(1 g) = 0.085 W/kg ; SAR(10 g) = 0.044 W/kg

Maximum value of SAR (measured) = 0.785 W/kg

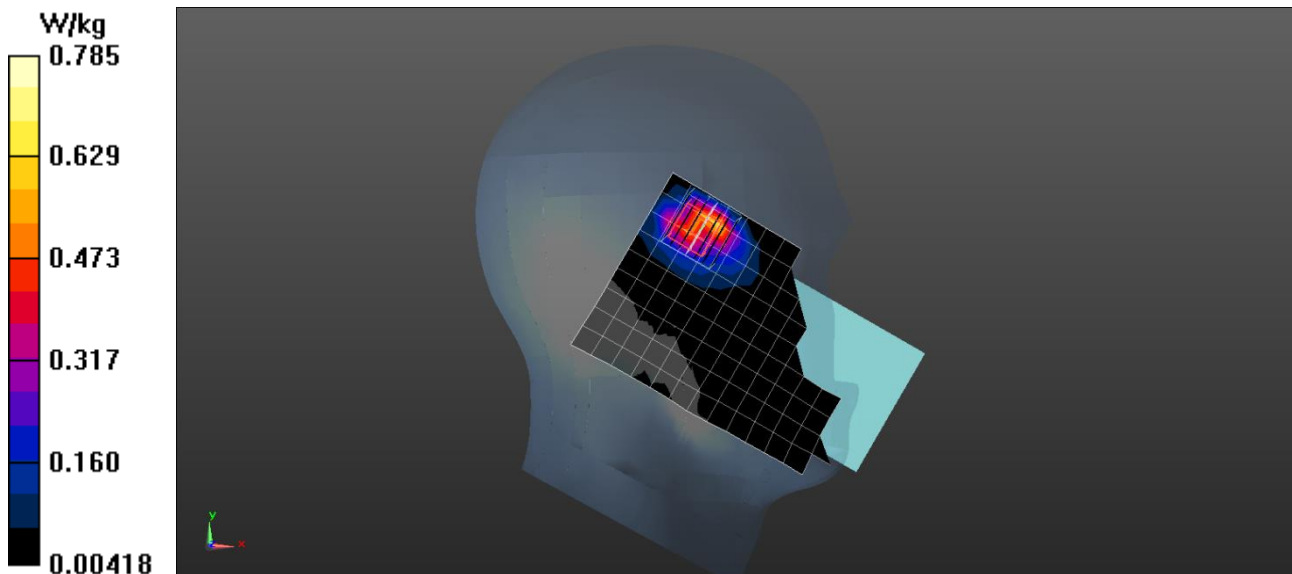

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Date: 2024/11/18

Test Laboratory: LCS-SAR Lab

WIFI 5.8G 802.11ac 20M 165CH Rear side 10mm ANT2

DUT: Smart Phone; Type: Blade GT; Serial: A241031015-1

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5825 MHz; Duty Cycle: 1:1.267

Medium parameters used: $f = 5825 \text{ MHz}$; $\sigma = 5.257 \text{ S/m}$; $\epsilon_r = 35.231$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.88, 4.88, 4.88); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (11x18x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.752 W/kg


Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 0.215 V/m ; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.111 W/kg

SAR(1 g) = 0.089 W/kg ; SAR(10 g) = 0.051 W/kg

Maximum value of SAR (measured) = 0.774 W/kg

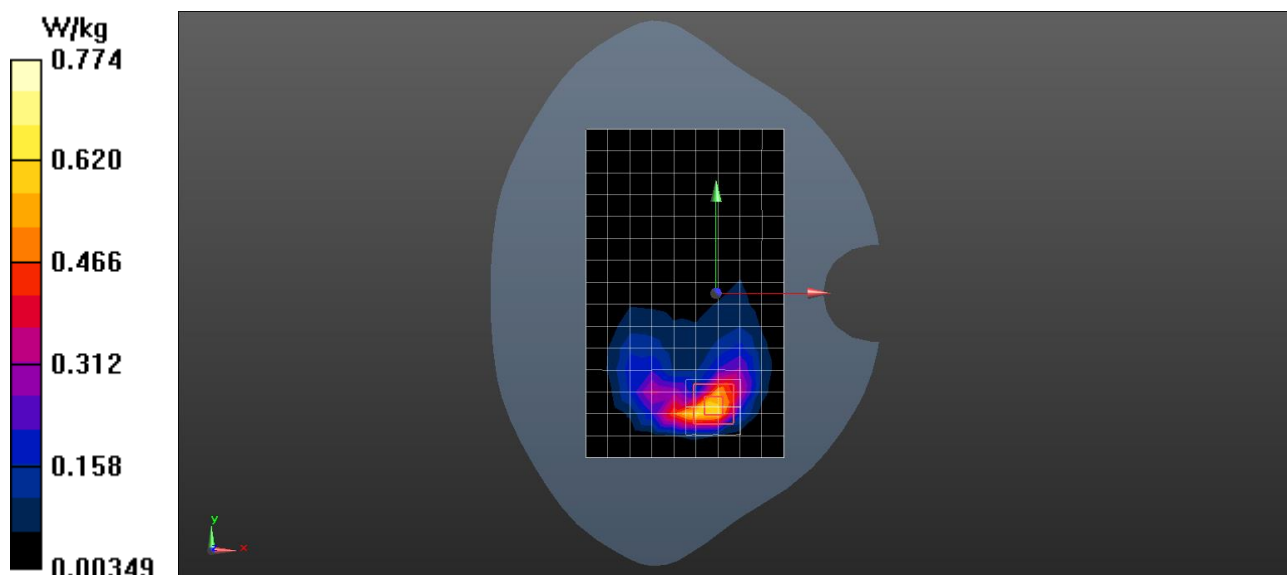

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity