



Test report No.: 2340476R-RFUSV03S-A

TEST REPORT (Class II Permissive Change)

Product Name	xPico® 200 Series Wi-Fi® IoT Gateway Module
Trademark	Lantronix
Model and /or type reference	xPico 270
FCC ID	R68XPICO200
Applicant's name / address	Lantronix, Inc. 48 Discovery, Suite 250, Irvine, California, United States 92618
Manufacturer's name	Lantronix, Inc.
Test method requested, standard	FCC CFR Title 47 Part 15 Subpart E ANSI C63.4: 2014, ANSI C63.10: 2013 KDB Publication 789033
Verdict Summary	IN COMPLIANCE
Documented By (Supervisor / Jinn Chen)	<i>Jinn Chen</i>
Tested By (Senior Engineer / Bill Lin)	<i>Bill Lin</i>
Approved By (Senior Engineer / Alan Chen)	<i>Alan Chen</i>
Date of Receipt	2023/04/18
Date of Issue	2023/11/02
Report Version	V1.0

INDEX

	Page
1. General Information.....	5
1.1. EUT Description.....	5
1.2. Tested System Details.....	8
1.3. Configuration of Tested System	8
1.4. EUT Exercise Software	8
1.5. Test Facility	9
1.6. List of Test Equipment.....	10
1.7. Uncertainty	11
2. Maximum conducted output power	12
2.1. Test Setup	12
2.2. Limits.....	13
2.3. Test Procedure	14
2.4. Test Result of Maximum conducted output power	15
3. Radiated Emission	27
3.1. Test Setup	27
3.2. Limits.....	28
3.3. Test Procedure	29
3.4. Test Result of Radiated Emission	30
4. Band Edge	60
4.1. Test Setup	60
4.2. Limits.....	61
4.3. Test Procedure	62
4.4. Test Result of Band Edge	63
5. Duty Cycle	89
5.1. Test Setup	89
5.2. Test Procedure	89
5.3. Test Result of Duty Cycle.....	90

Appendix 1: EUT Test Photographs

Appendix 2: Product Photos-Please refer to the file: 2340476R-Product Photos

Competences and Guarantees

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

General conditions

1. The test results relate only to the samples tested.
2. The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.
3. This report must not be used to claim product endorsement by TAF or any agency of the government.
4. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.
5. Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Revision History

Report No.	Version	Description	Issued Date
2340476R-RFUSV03S-A	V1.0	Initial issue of report.	2023/11/02

1. General Information

1.1. EUT Description

Product Name	xPico® 200 Series Wi-Fi® IoT Gateway Module
Trademark	Lantronix
Model and /or type reference	xPico 270
EUT Rated Voltage	DC 3.3V (Power by Test Fixture)
EUT Test Voltage	AC 120V, 60Hz
Frequency Range	802.11a/n/ac-20 MHz: 5180-5320 MHz, 5500-5700 MHz, 5745-5825 MHz 802.11n/ac-40 MHz: 5190-5310 MHz, 5510-5670MHz, 5755-5795 MHz 802.11ac-80 MHz: 5210-5290 MHz, 5530-5610 MHz, 5775 MHz
Number of Channels	802.11a/n/ac-20 MHz: 24, 802.11n/ac-40 MHz: 11 802.11ac-80 MHz: 5
Data Rate	802.11a: 6 - 54 Mbps 802.11n: up to 150 Mbps 802.11ac: up to 433.3 Mbps
Type of Modulation	802.11a/n/ac: OFDM, BPSK, QPSK, 16QAM, 64QAM, 256QAM
Channel Control	Auto

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	WHA YU INDUSTRIAL CO., LTD.	C056-511080-A	PIFA	4.60 dBi for 5150-5250 MHz 4.60 dBi for 5250-5350 MHz 5.20 dBi for 5470-5725 MHz 5.20 dBi for 5725~5850 MHz

Note: The antenna of EUT is conforming to FCC 15.203.

802.11a/n/ac-20 MHz Center Working Frequency of Each Channel:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	40	5200	44	5220	48	5240
52	5260	56	5280	60	5300	64	5320
100	5500	104	5520	108	5540	112	5560
116	5580	120	5600	124	5620	128	5640
132	5660	136	5680	140	5700	149	5745
153	5765	157	5785	161	5805	165	5825

802.11n/ac-40 MHz Center Working Frequency of Each Channel:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	46	5230	54	5270	62	5310
102	5510	110	5550	118	5590	126	5630
134	5670	151	5755	159	5795	--	--

802.11ac-80 MHz Center Working Frequency of Each Channel:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	58	5290	106	5530	122	5610
155	5775	--	--	--	--	--	--

Note:

1. This device is a xPico® 200 Series Wi-Fi® IoT Gateway Module with built-in WLAN and Bluetooth transceiver, this report for 5GHz WLAN.
2. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
3. Lowest and highest data rates are tested in each mode. Only worst case is shown in the report.
4. This is to request a Class II permissive change.

The major change filed under this application is:

Change #1: Addition a PIFA Antenna, the antenna type is different with the original application.

Change #2: Reduce the BT & WLAN 2.4GHz/5GHz output power through firmware

(SW Version: 5.4).

5. These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance of transmitter with Part 15 Subpart E for Unlicensed National Information Infrastructure devices.

Test Mode	Mode 1	Transmit (802.11a)
		Transmit (802.11n-20MHz)
		Transmit (802.11n-40MHz)
		Transmit (802.11ac-20MHz)
		Transmit (802.11ac-40MHz)
		Transmit (802.11ac-80MHz)


1.2. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1 Power Adapter	EDAC	EA11013C-2400	N/A	N/A
2 Notebook PC	DELL	Latitude 5501	4H94P13	N/A
3 Control Board	TSC	40-2250001	N/A	N/A
4 USB to TTL	TSC	CP2102	N/A	N/A
5 Test Fixture	TSC	RF-WX27N	N/A	N/A

Cable Type	Cable Description
A Power Cable	Non-shielded, 1.2m, with one ferrite core bonded.
B WiFi & BT Cable	Non-shielded, 0.06m
C Jumper Wire	Non-shielded, 0.3m
D USB Cable	Shielded, 1m

1.3. Configuration of Tested System

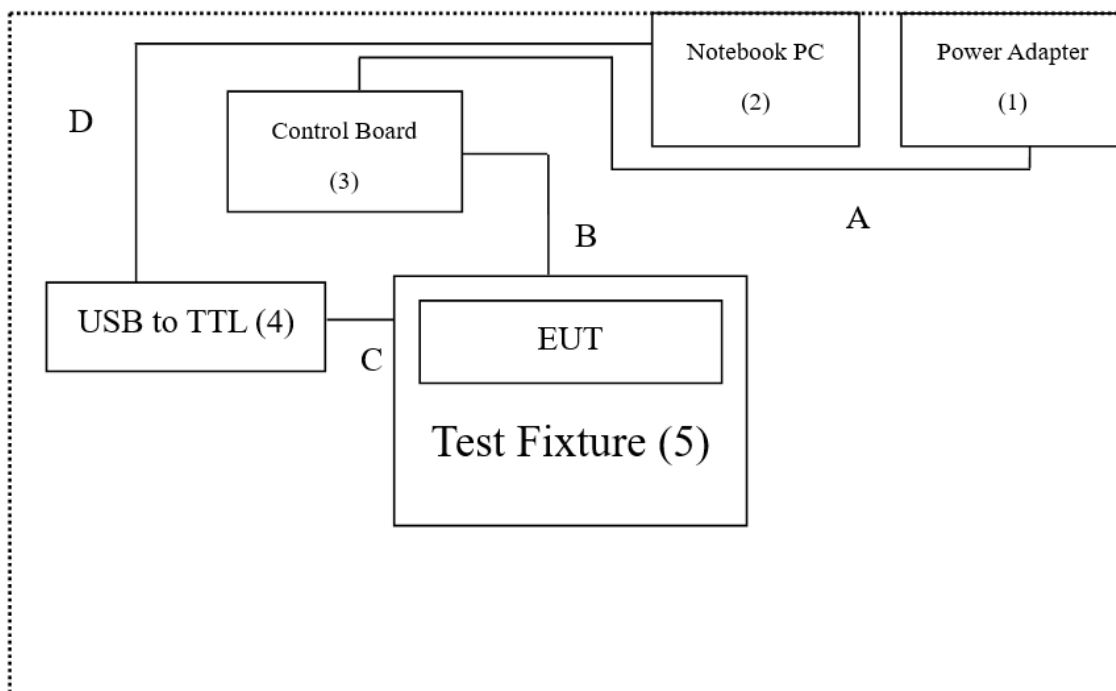

1.4. EUT Exercise Software

1.	Setup the EUT as shown in Section 1.3.
2.	Execute software 'Tera Term Version 4.105' on the Notebook PC.
3.	Configure the test mode, the test channel, and the data rate.
4.	Press "OK" to start the continuous Transmit.
5.	Verify that the EUT works properly.

1.5. Test Facility

Ambient conditions in the laboratory:

Performed Item	Items	Required	Actual
Radiated Emission	Temperature (°C)	10~40 °C	22.5 °C
	Humidity (%RH)	10~90 %	63.4 %
Conductive	Temperature (°C)	10~40 °C	22.0 °C
	Humidity (%RH)	10~90 %	55.0 %

USA	FCC Registration Number: TW0033
Canada	CAB Identifier Number: TW3023 / Company Number: 26930

Site Description	Accredited by TAF
	Accredited Number: 3023

Test Laboratory	DEKRA Testing and Certification Co., Ltd.
	Linkou Laboratory
Address	No.5-22, Ruishukeng Linkou District, New Taipei City, 24451, Taiwan, R.O.C.
Performed Location	No. 26, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan, R.O.C.
Phone Number	+886-3-275-7255
Fax Number	+886-3-327-8031

1.6. List of Test Equipment

For Conduction Measurements / HY-SR01

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
	EMI Test Receiver	R&S	ESR7	101601	2022/06/23	2023/06/22
	Two-Line V-Network	R&S	ENV216	101306	2023/03/16	2024/03/15
	Two-Line V-Network	R&S	ENV216	101307	2022/07/04	2023/07/03
	Coaxial Cable	SUHNER	RG400_BNC	RF001	2022/05/24	2023/05/23

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with “V” are used to measure the final test results.
3. Test Software Version: e3 230303 dekra V9.

For Conducted Measurements / HY-SR02

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	Spectrum Analyzer	R&S	FSV30	103466	2022/12/22	2023/12/21
V	Peak Power Analyzer	KEYSIGHT	8990B	MY51000410	2022/08/06	2023/08/05
V	Wideband Power Sensor	KEYSIGHT	N1923A	MY56080003	2022/08/05	2023/08/04
V	Wideband Power Sensor	KEYSIGHT	N1923A	MY56080004	2022/08/05	2023/08/04

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with “V” are used to measure the final test results.
3. Test Software Version: RF Conducted Test Tools R3 V3.0.1.14.

For Radiated Measurements / HY-CB01

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	Loop Antenna	AMETEK	HLA6121	49611	2023/02/21	2024/02/20
V	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-675	2021/08/11	2023/08/10
V	Horn Antenna	RF SPIN	DRH18-E	210802A18ES	2023/03/23	2024/03/22
V	Horn Antenna	Com-Power	AH-840	101101	2021/11/30	2023/11/29
V	Pre-Amplifier	SGH	0301	20211007-7	2023/01/10	2024/01/09
V	Pre-Amplifier	EMCI	EMC051845SE	980632	2023/01/10	2024/01/09
V	Pre-Amplifier	EMCI	EMC05820SE	980361	2023/01/10	2024/01/09
	Pre-Amplifier	EMCI	EMC184045SE	980369	2023/01/10	2024/01/09
V	Coaxial Cable	EMCI	EMC102-KM-KM-600	1160314		
	Coaxial Cable	EMCI	EMC102-KM-KM-7000	170242		
	Filter	MICRO TRONICS	BRM50702	G269	2023/01/05	2024/01/04
V	Filter	MICRO TRONICS	BRM50716	G196	2023/01/05	2024/01/04
V	EMI Test Receiver	R&S	ESR3	102793	2022/12/05	2023/12/04
V	Spectrum Analyzer	R&S	FSV3044	101115	2023/01/06	2024/01/05
	Coaxial Cable	SUHNER	SUCOFLEX 106	25450/6	2023/01/10	2024/01/09
V	Coaxial Cable	SGH	HA800	GD20110222-8		
	Coaxial Cable	SGH	SGH18	2021003-8		
	Coaxial Cable	EMCI	EMC106	151113		

Note:

1. Bi-Log Antenna and Horn Antenna(AH-840) is calibrated every two years, the other equipments are calibrated every one year.
2. The test instruments marked with “V” are used to measure the final test results.
3. Test Software Version: e3 230303 dekra V9.

1.7. Uncertainty

Uncertainties have been calculated according to the DEKRA internal document.

The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.


Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test item	Uncertainty
Maximum Power Output	Spectrum Analyzer: ± 2.14 dB Power Meter: ± 1.05 dB
Radiated Emission	9 kHz~30 MHz: ± 3.88 dB 30 MHz~1 GHz: ± 4.42 dB 1 GHz~18 GHz: ± 4.28 dB 18 GHz~40 GHz: ± 3.90 dB
Band Edge	9 kHz~30 MHz: ± 3.88 dB 30 MHz~1 GHz: ± 4.42 dB 1 GHz~18 GHz: ± 4.28 dB 18 GHz~40 GHz: ± 3.90 dB
Duty Cycle	± 0.53 %

2. Maximun conducted output power


2.1. Test Setup

99% Occupied Bandwidth

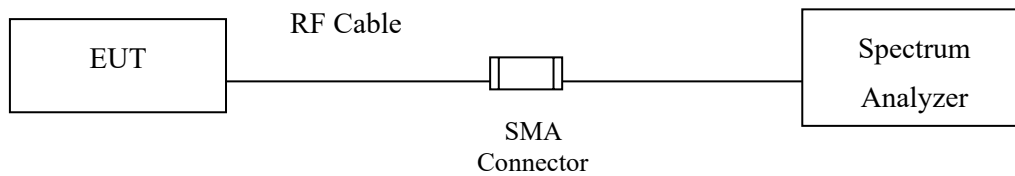


Conduction Power Measurement

Conduction Power Measurement (for 802.11an)

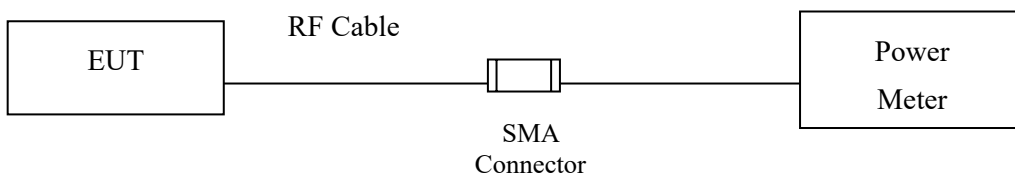

Conduction Power Measurement (for 802.11ac)

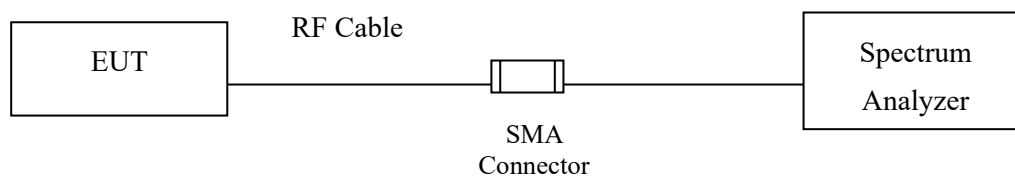

2.2. Limits

For the band 5.15-5.25 GHz,

- (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
- (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
- (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 99% emission bandwidth in megahertz. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point UNII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

2.3. Test Procedure

As an alternative to FCC KDB-789033, the EUT maximum conducted output power was measured with an average power meter employing a video bandwidth greater the 6dB BW of the emission under test. Maximum conducted output power was read directly from the meter across all data rates, and across three channels within each sub-band. Special care was used to make sure that the EUT was transmitting in continuous mode. This method exceeds the limitations of FCC KDB-789033, and provides more accurate measurements.

802.11an (BW $\leq$ 40MHz) Maximum conducted output power using KDB 789033 section E)3)b) Method PM-G (Measurement using a gated RF average power meter)

Note: the power meter have a video bandwidth that is greater than or equal to the measurement bandwidth, (Anritsu/ MA2411B video bandwidth: 65MHz)

802.11ac (BW=80MHz) Maximum conducted output power using KDB 789033 section E)2)b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep).

When transmitted signals consist of two or more non-contiguous spectrum segments (e.g., 80+80 MHz mode) or when a single spectrum segment of a transmission crosses the boundary between two adjacent U-NII bands, KDB 644545 D03 section D) procedure is used for measurements.

2.4. Test Result of Maximum conducted output power

Product : xPico® 200 Series Wi-Fi® IoT Gateway Module
 Test Item : Maximum conducted output power
 Test Mode : Transmit (802.11a)
 Test Date : 2023/04/25


Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	Output Power (dBm)	Duty factor (dB)	Total Output Power (dBm)	Output Power Limit	
						(dBm)	dBm+10log(BW)
36	5180	--	13.27	--	13.27	24	--
40	5200	--	18.08	--	18.08	24	--
48	5240	--	17.70	--	17.70	24	--
52	5260	26.53	17.95	--	17.95	24	25.24
60	5300	26.69	18.02	--	18.02	24	25.26
64	5320	26.57	14.11	--	14.11	24	25.24
100	5500	24.49	12.26	--	12.26	24	24.89
116	5580	24.21	15.22	--	15.22	24	24.84
140	5700	24.05	12.86	--	12.86	24	24.81
149	5745	--	14.40	--	14.40	30	--
157	5785	--	14.00	--	14.00	30	--
165	5825	--	14.57	--	14.57	30	--

Note:

1. 26dB Bandwidth is the bandwidth of chain A whichever is less bandwidth, output power limitation is more stringent.

26dB Occupied Bandwidth:

Channel 140

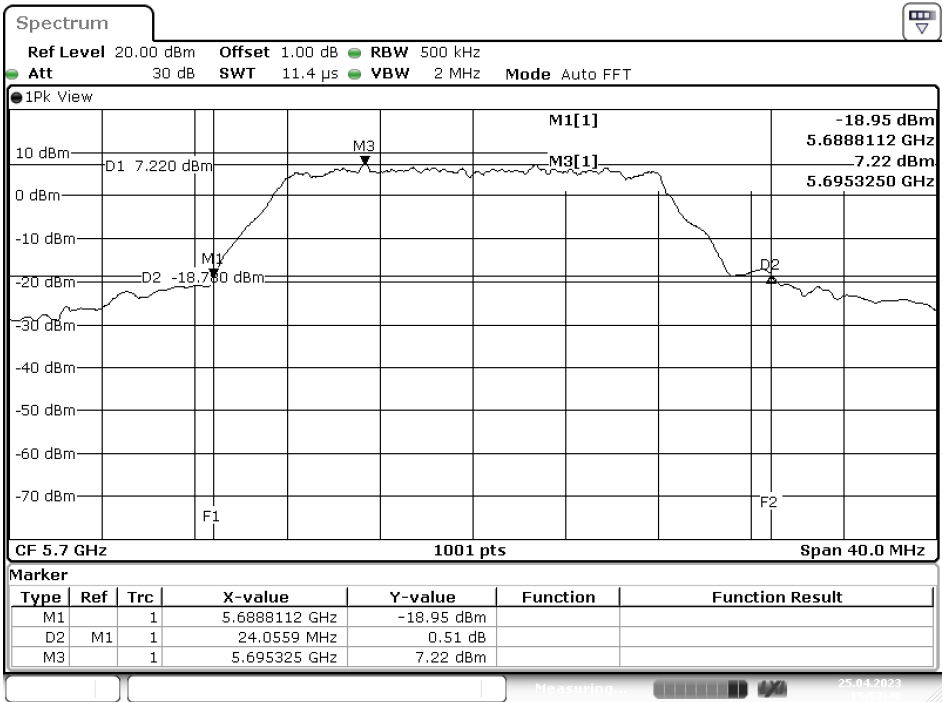

Date: 25.APR.2023 15:52:47

Product : xPico® 200 Series Wi-Fi® IoT Gateway Module
 Test Item : Maximum conducted output power
 Test Mode : Transmit (802.11n-20MHz)
 Test Date : 2023/04/25


Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	Output Power (dBm)	Duty factor (dB)	Total Output Power (dBm)	Output Power Limit	
						(dBm)	dBm+10log(BW)
36	5180	--	13.37	--	13.37	24	--
40	5200	--	17.85	--	17.85	24	--
48	5240	--	15.05	--	15.05	24	--
52	5260	29.69	17.81	--	17.81	24	25.73
60	5300	27.53	17.90	--	17.90	24	25.40
64	5320	28.41	13.20	--	13.20	24	25.53
100	5500	27.41	11.33	--	11.33	24	25.38
116	5580	25.41	15.70	--	15.70	24	25.05
140	5700	23.93	12.28	--	12.28	24	24.79
149	5745	--	14.50	--	14.50	30	--
157	5785	--	14.02	--	14.02	30	--
165	5825	--	14.42	--	14.42	30	--

Note:

1. 26dB Bandwidth is the bandwidth of chain A whichever is less bandwidth, output power limitation is more stringent.

26dB Occupied Bandwidth:

Channel 140

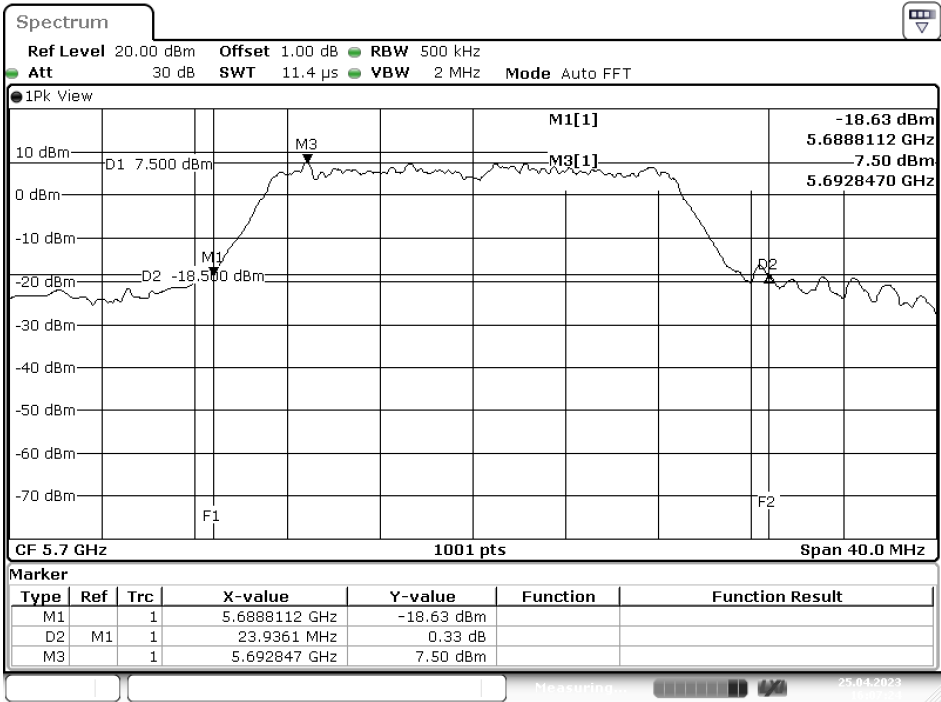

Date: 25.APR.2023 16:07:25

Product : xPico® 200 Series Wi-Fi® IoT Gateway Module
 Test Item : Maximum conducted output power
 Test Mode : Transmit (802.11n-40MHz)
 Test Date : 2023/04/25


Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	Output Power (dBm)	Duty factor (dB)	Total Output Power (dBm)	Output Power Limit	
						(dBm)	dBm+10log(BW)
38	5190	--	11.44	--	11.44	24	--
46	5230	--	17.12	--	17.12	24	--
54	5270	52.98	17.73	--	17.73	24	28.24
62	5310	53.14	10.78	--	10.78	24	28.25
102	5510	53.14	10.30	--	10.30	24	28.25
110	5550	52.10	15.56	--	15.56	24	28.17
134	5670	48.43	13.32	--	13.32	24	27.85
151	5755	--	17.22	--	17.22	30	--
159	5795	--	17.05	--	17.05	30	--

Note:

1. 26dB Bandwidth is the bandwidth of chain A whichever is less bandwidth, output power limitation is more stringent.

26dB Occupied Bandwidth:

Channel 134

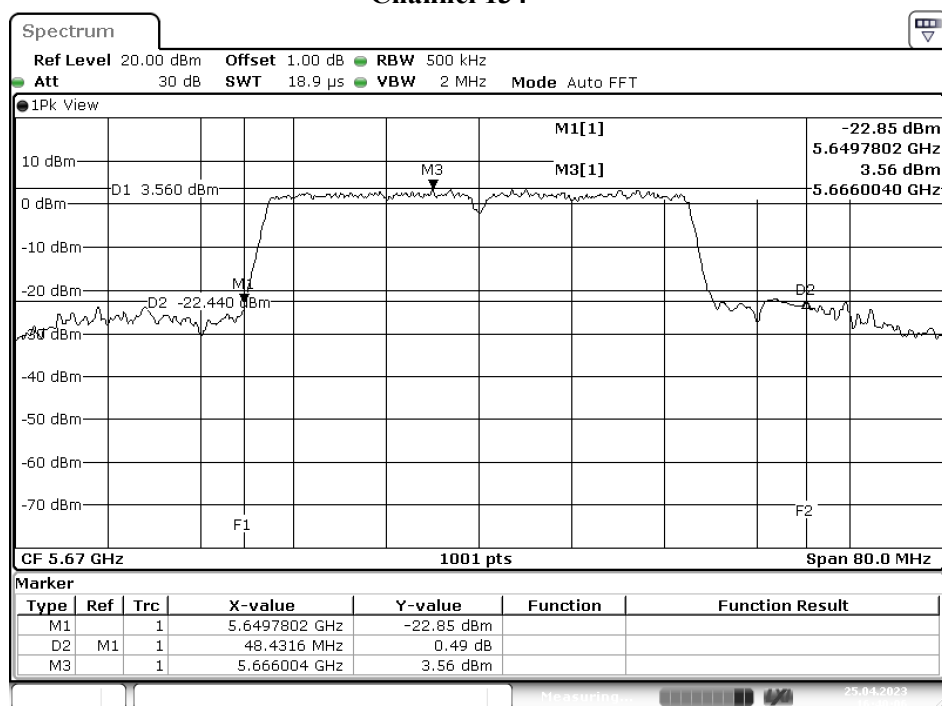

Date: 25.APR.2023 16:40:06

Product : xPico® 200 Series Wi-Fi® IoT Gateway Module
 Test Item : Maximum conducted output power
 Test Mode : Transmit (802.11ac-20MHz)
 Test Date : 2023/04/25


Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	Output Power (dBm)	Duty factor (dB)	Total Output Power (dBm)	Output Power Limit	
						(dBm)	dBm+10log(BW)
36	5180	--	13.40	--	13.40	24	--
40	5200	--	17.88	--	17.88	24	--
48	5240	--	15.14	--	15.14	24	--
52	5260	27.69	17.63	--	17.63	24	25.42
60	5300	24.97	17.85	--	17.85	24	24.97
64	5320	27.37	13.52	--	13.52	24	25.37
100	5500	22.49	12.30	--	12.30	24	24.52
116	5580	22.33	15.22	--	15.22	24	24.49
140	5700	22.33	11.67	--	11.67	24	24.49
149	5745	--	14.46	--	14.46	30	--
157	5785	--	13.92	--	13.92	30	--
165	5825	--	14.40	--	14.40	30	--

Note:

1. 26dB Bandwidth is the bandwidth of chain A whichever is less bandwidth, output power limitation is more stringent.

26dB Occupied Bandwidth:

Channel 116

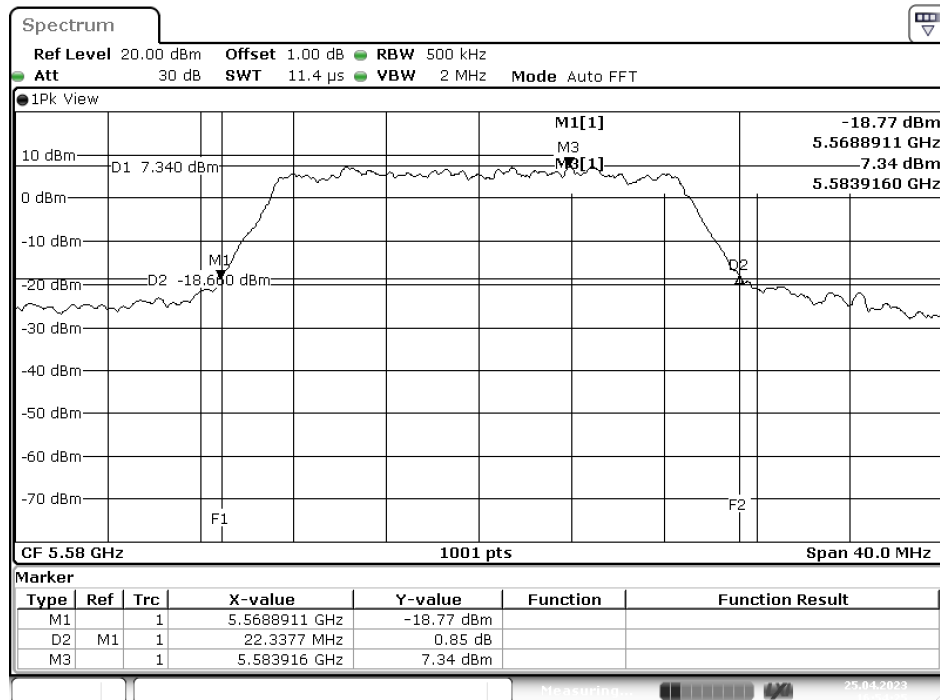

Date: 25.APR.2023 16:54:25

Product : xPico® 200 Series Wi-Fi® IoT Gateway Module
 Test Item : Maximum conducted output power
 Test Mode : Transmit (802.11ac-40MHz)
 Test Date : 2023/04/25


Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	Output Power (dBm)	Duty factor (dB)	Total Output Power (dBm)	Output Power Limit	
						(dBm)	dBm+10log(BW)
38	5190	--	11.33	--	11.33	24	--
46	5230	--	17.21	--	17.21	24	--
54	5270	40.19	17.54	--	17.54	24	27.04
62	5310	43.87	10.95	--	10.95	24	27.42
102	5510	43.47	10.50	--	10.50	24	27.38
110	5550	50.34	15.70	--	15.70	24	28.02
134	5670	50.82	13.50	--	13.50	24	28.06
151	5755	--	16.74	--	16.74	30	--
159	5795	--	16.40	--	16.40	30	--

Note:

1. 26dB Bandwidth is the bandwidth of chain A whichever is less bandwidth, output power limitation is more stringent.

26dB Occupied Bandwidth:

Channel 54

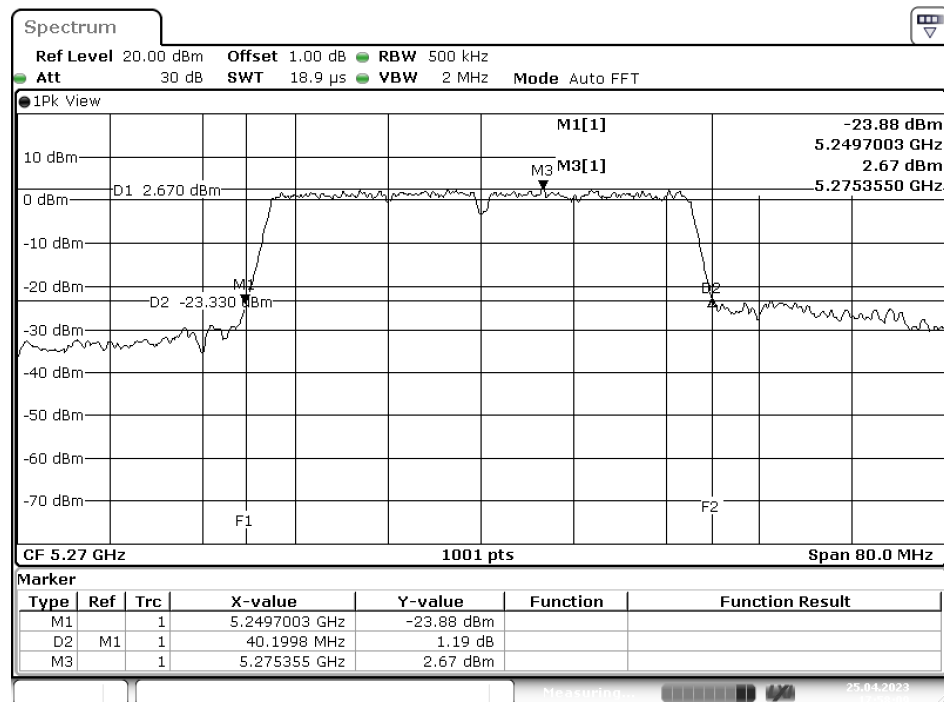

Date: 25.APR.2023 17:58:10


Product : xPico® 200 Series Wi-Fi® IoT Gateway Module
 Test Item : Maximum conducted output power
 Test Mode : Transmit (802.11ac-80MHz)
 Test Date : 2023/04/25

Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	Output Power (dBm)	Duty factor (dB)	Total Output Power (dBm)	Output Power Limit	
						(dBm)	dBm+10log(BW)
42	5210	--	12.16	--	12.16	24	--
58	5290	93.50	10.66	--	10.66	24	30.71
106	5530	81.67	12.01	--	12.01	24	30.12
122	5610	80.87	12.51	--	12.51	24	30.08
155	5775	--	14.12	--	14.12	30	--

Note:

1. 26dB Bandwidth is the bandwidth of chain A whichever is less bandwidth, output power limitation is more stringent.

26dB Occupied Bandwidth:
Channel 122

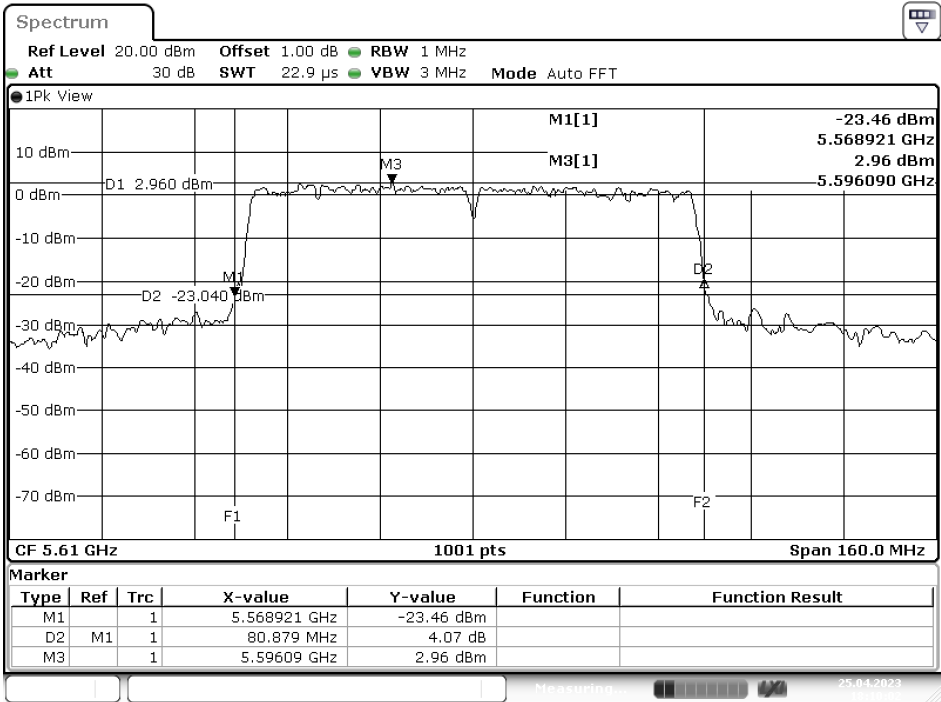


Date: 25.APR.2023 18:10:03


3. Radiated Emission

3.1. Test Setup


Radiated Emission Under 30 MHz

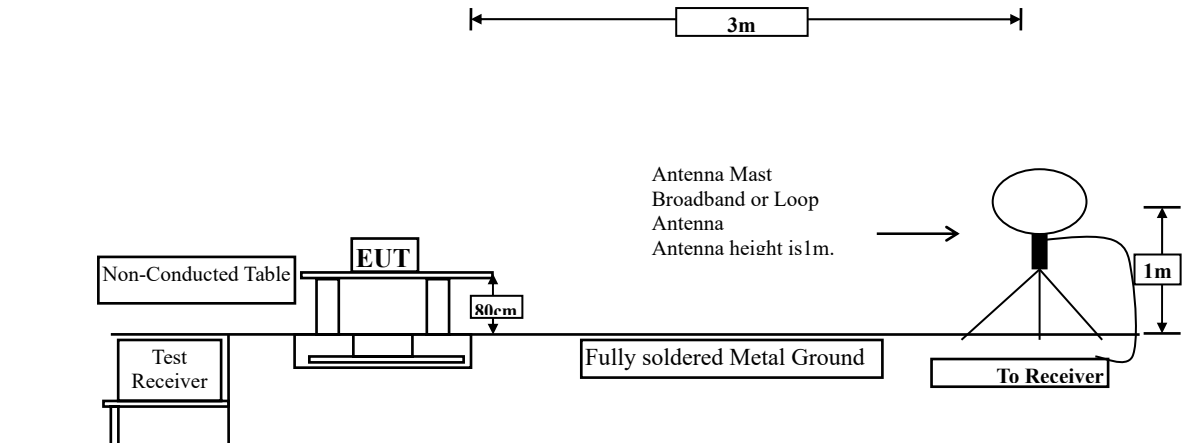

Radiated Emission Below 1 GHz

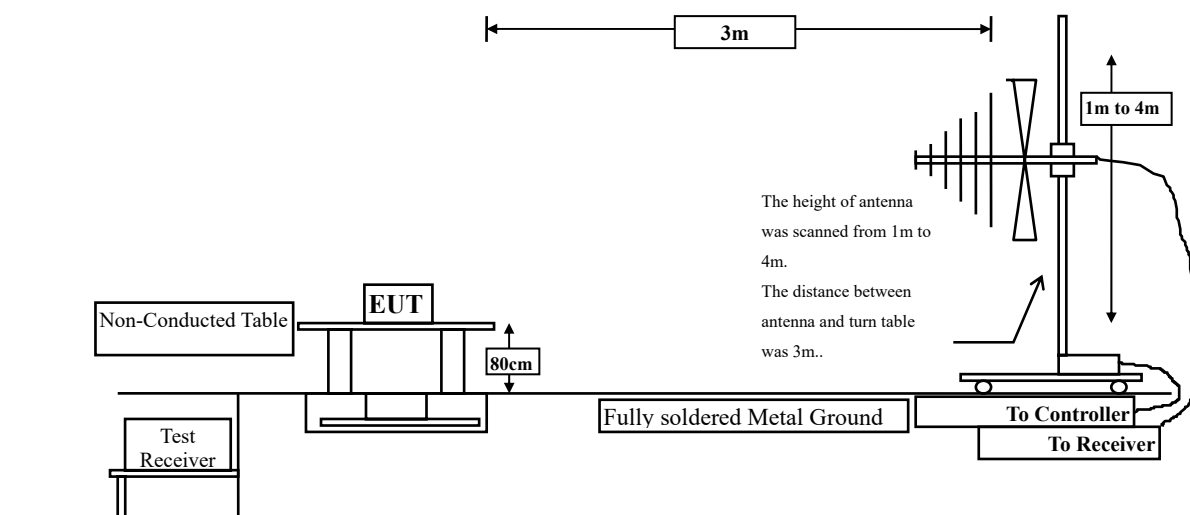

Radiated Emission Above 1 GHz

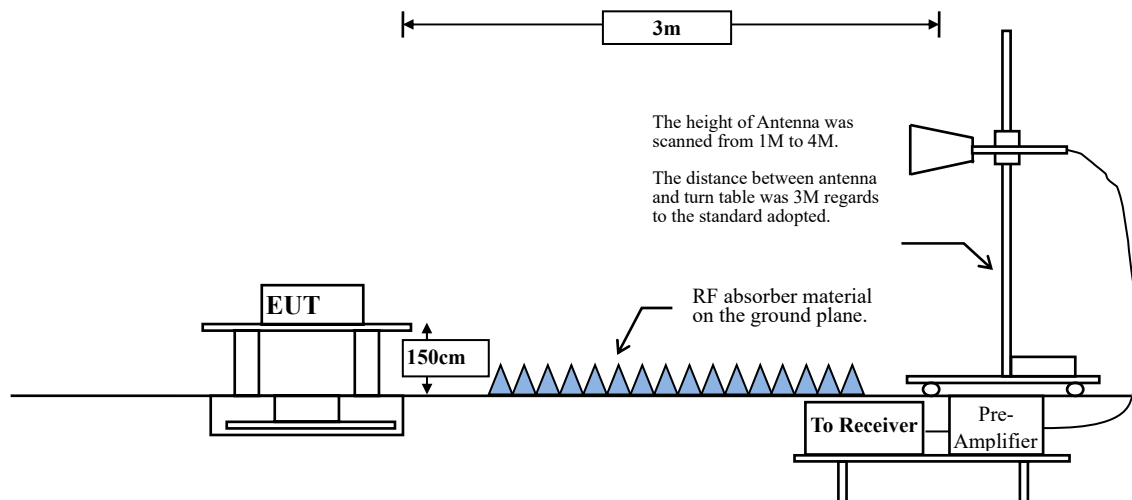

3.2. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209(a) Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks: E field strength (dBμV/m) = 20 log E field strength (uV/m)

- For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- For transmitters operating in the 5.725-5.85 GHz band:
All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

Based on ANSI C63.10-2013 Section 12.7.3 d) provides the conversion formula between field strength and EIRP, if distance is 3m, -27dBm is equivalent to 68.22dBuV/m.

3.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested according to FCC KDB-789033 test procedure for compliance to FCC 47CFR 15. 407 requirements.

Measuring the frequency range below 1 GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1 GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30 MHz setting on the field strength meter is 9kHz and 30 MHz~1 GHz is 120 kHz and above 1 GHz is 1 MHz.

Radiated emission measurements below 30 MHz are made using Loop Antenna and 30 MHz~1 GHz are made using broadband Bilog antenna and above 1 GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The measurement frequency range from 9 kHz - 10th Harmonic of fundamental was investigated.

RBW and VBW Parameter setting:

According to KDB 789033 section II.G.5 Procedure for Unwanted Maximum Emissions Measurements above 1000 MHz.

RBW = 1 MHz.

VBW $\geq$ 3 MHz.

According to KDB 789033 section II.G.6 Procedures for Average Unwanted Emissions Measurements above 1000 MHz.

RBW = 1 MHz.

VBW = 10 Hz, when duty cycle $\geq$ 98 %


VBW $\geq$ 1/T, when duty cycle < 98 %


(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)

5 GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
802.11 a	98.35	1.4280	700	10
802.11 n20	95.56	2.5800	388	500
802.11 n40	92.11	1.2600	794	1000
802.11 ac20	95.57	2.5900	386	500
802.11 ac40	96.59	1.2750	784	1000
802.11 ac80	93.55	0.6090	1642	2000


Note: Duty Cycle Refer to Section 5.

3.4. Test Result of Radiated Emission

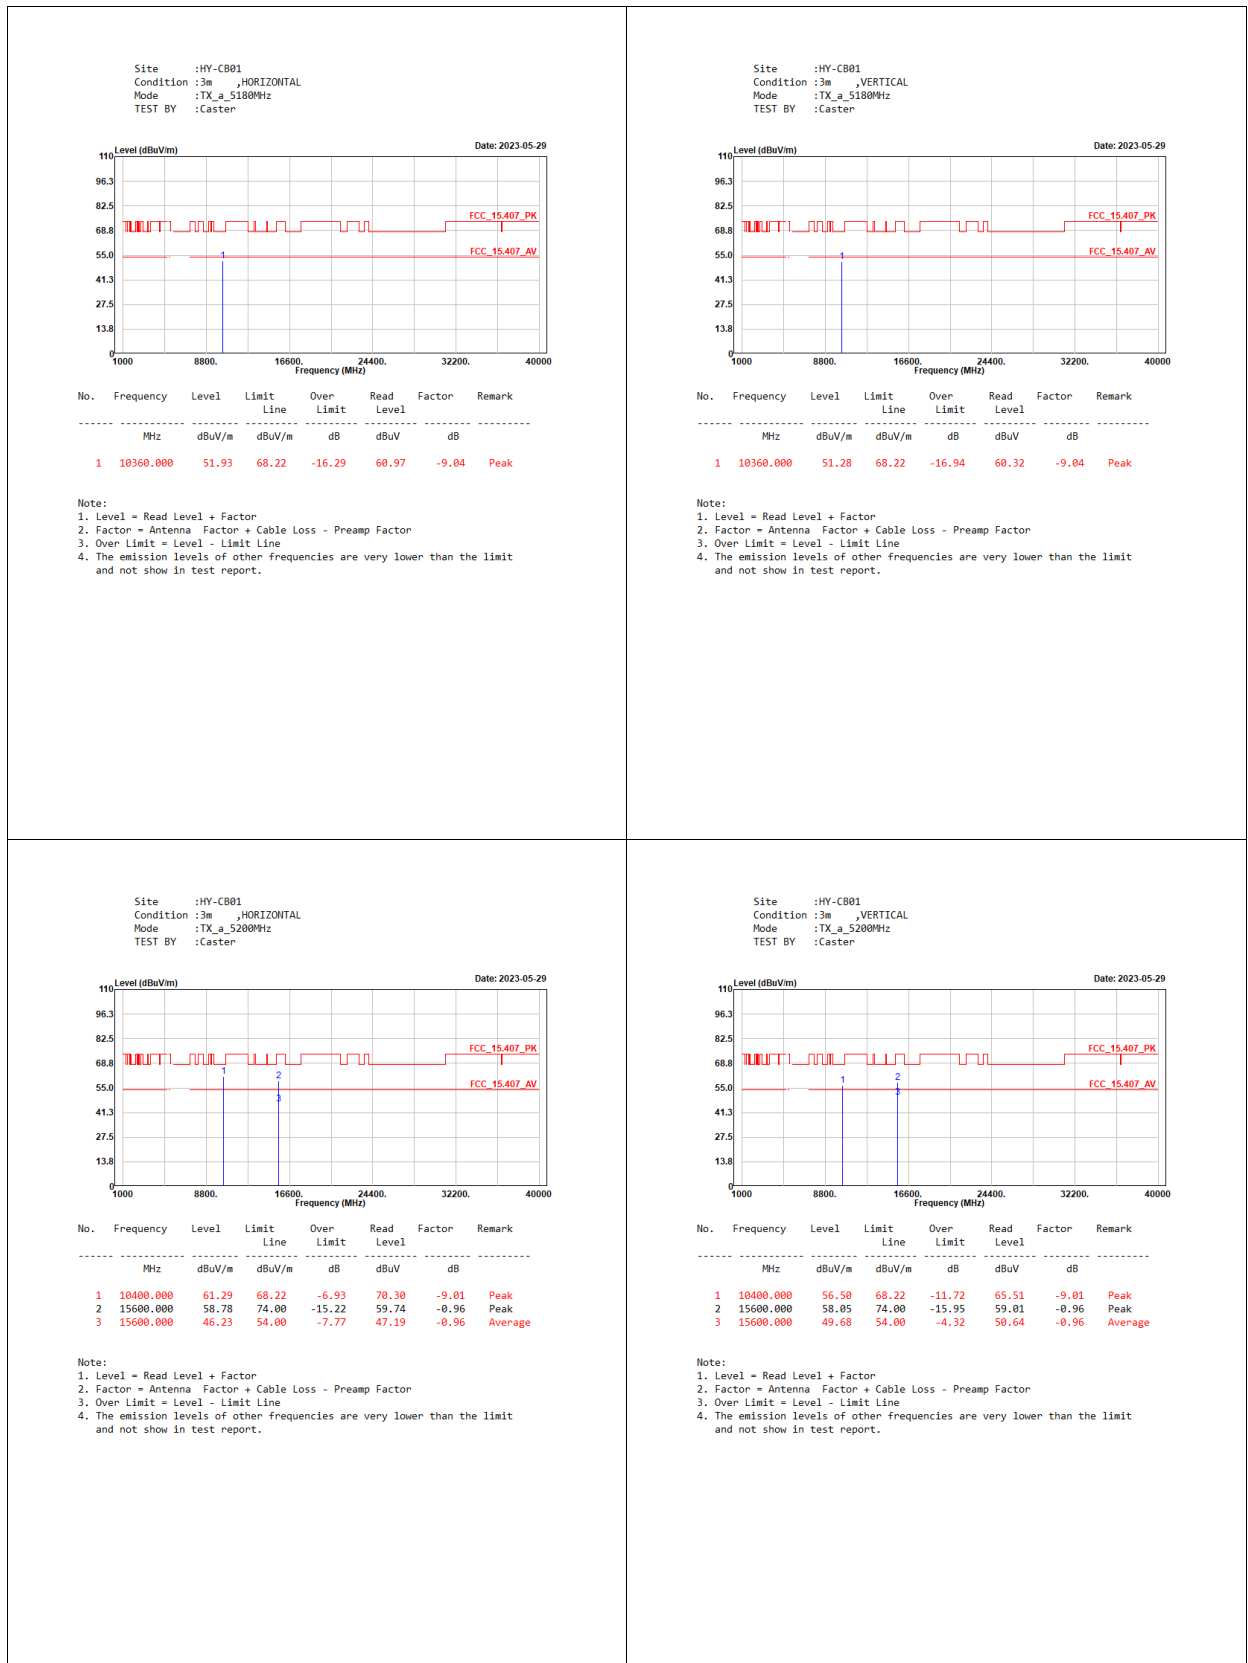

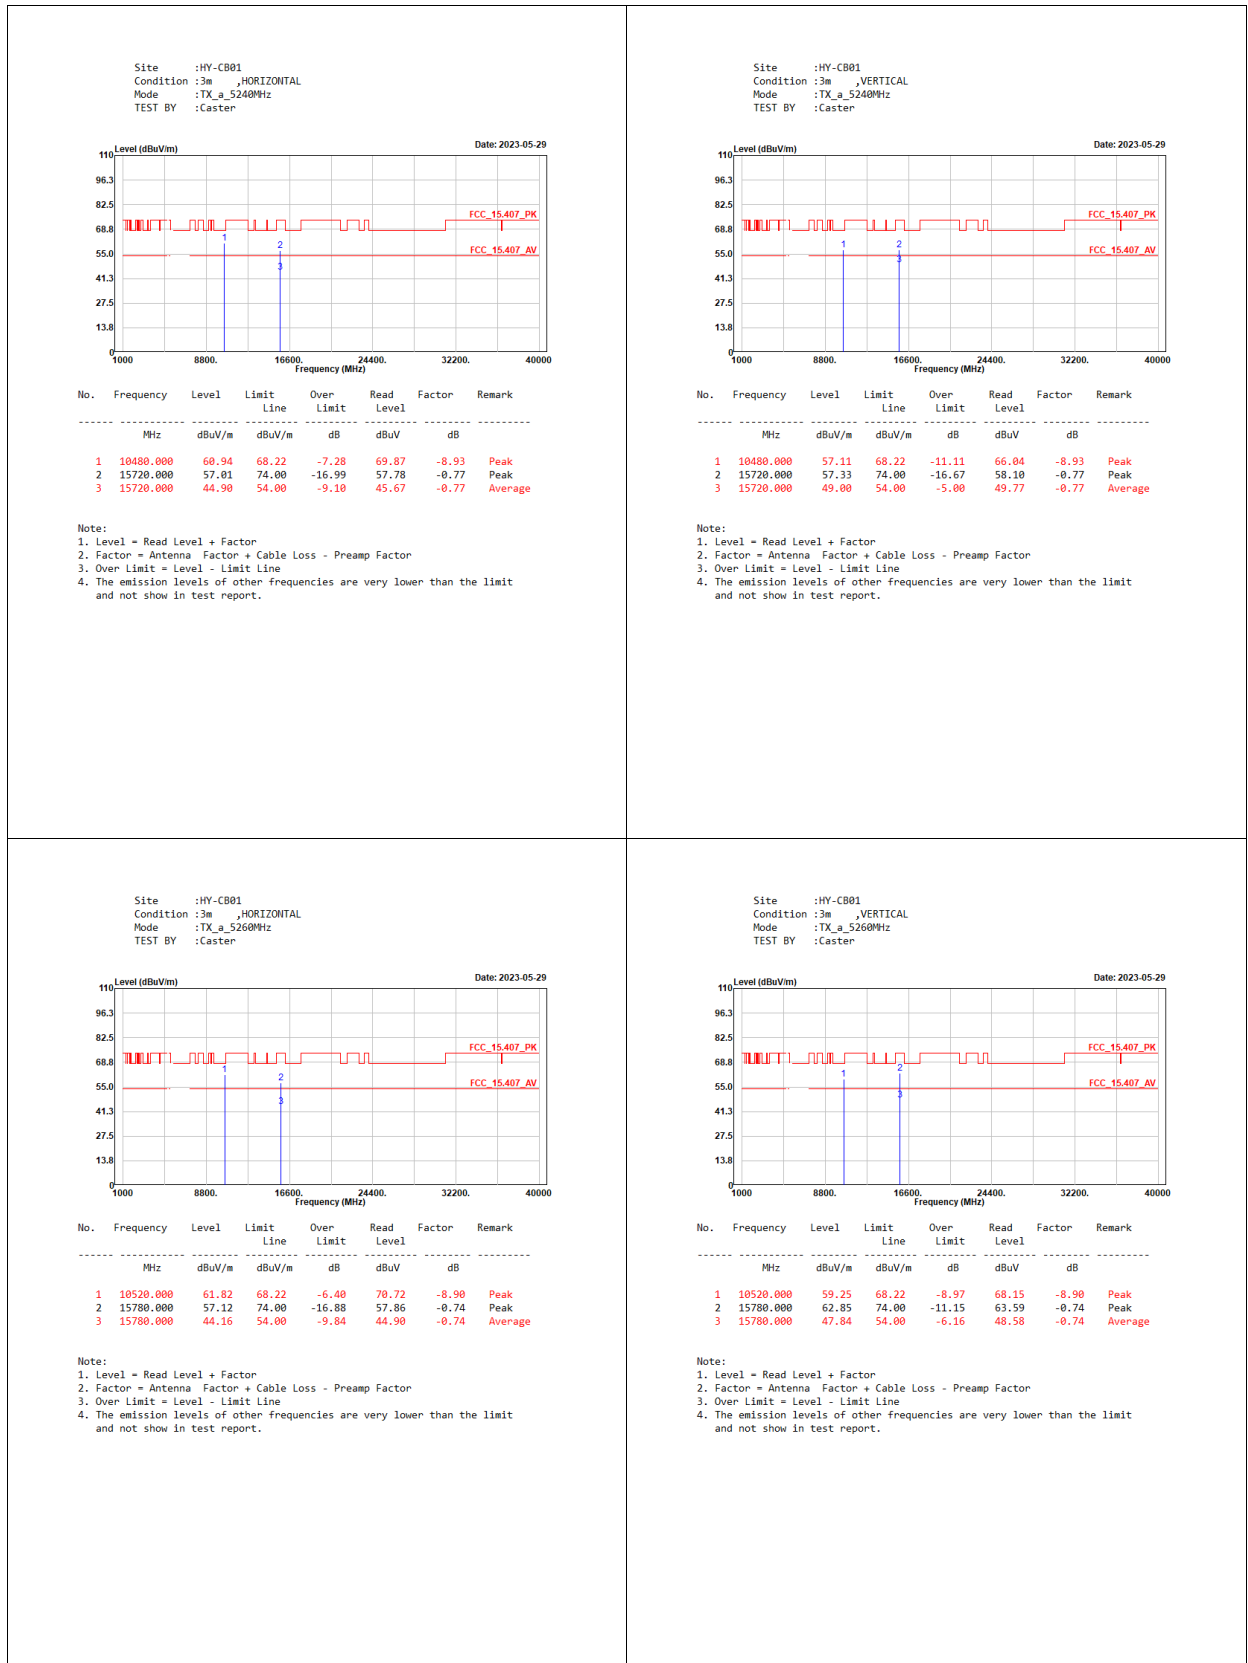


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_a_5380MHz
TEST BY :Caster

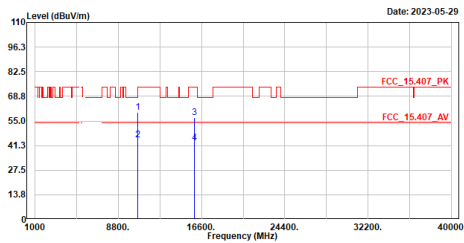

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	10600.000	59.64	74.00	-14.36	68.57	-8.93	Peak
2	10600.000	44.55	54.00	-9.45	53.48	-8.93	Average
3	15900.000	56.96	74.00	-17.04	57.68	-0.72	Peak
4	15900.000	42.82	54.00	-11.18	43.54	-0.72	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_a_5380MHz
TEST BY :Caster

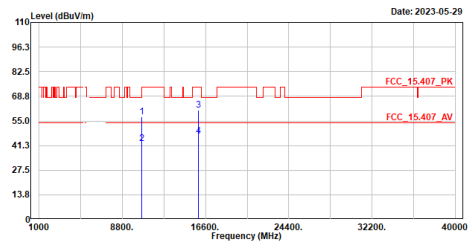

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	10600.000	57.29	74.00	-16.71	66.22	-8.93	Peak
2	10600.000	42.32	54.00	-11.68	51.25	-8.93	Average
3	15900.000	60.97	74.00	-13.03	61.69	-0.72	Peak
4	15900.000	46.57	54.00	-7.43	47.29	-0.72	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_a_5320MHz
TEST BY :Caster

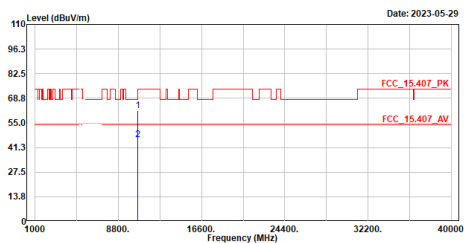

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	10640.000	61.90	74.00	-12.10	70.77	-8.87	Peak
2	10640.000	45.60	54.00	-8.40	54.47	-8.87	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_a_5320MHz
TEST BY :Caster

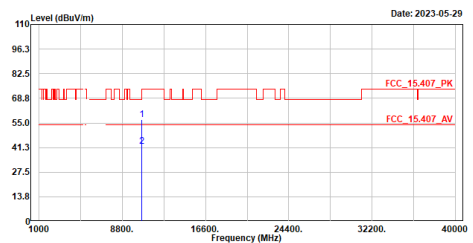

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	10640.000	57.06	74.00	-16.94	65.93	-8.87	Peak
2	10640.000	41.97	54.00	-12.03	50.84	-8.87	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_a_5580MHz
TEST BY :Caster

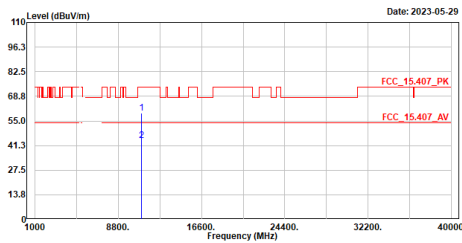

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11000.000	59.40	74.00	-14.60	67.93	-8.53	Peak
2	11000.000	44.06	54.00	-9.94	52.59	-8.53	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_a_5580MHz
TEST BY :Caster

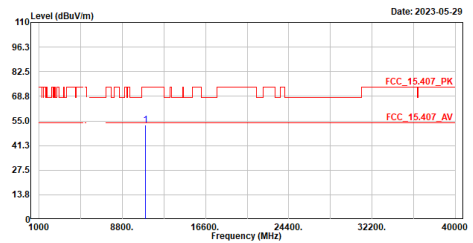

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11000.000	52.85	74.00	-21.15	61.38	-8.53	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_a_5580MHz
TEST BY :Caster

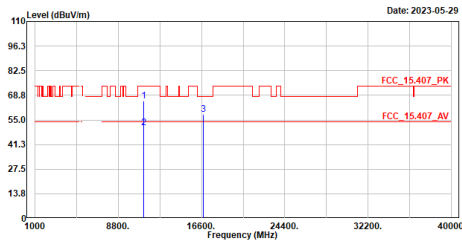

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11160.000	65.68	74.00	-8.32	73.63	-7.95	Peak
2	11160.000	50.54	54.00	-3.46	58.49	-7.95	Average
3	16740.000	57.95	68.22	-10.27	57.76	0.19	Peak


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_a_5580MHz
TEST BY :Caster

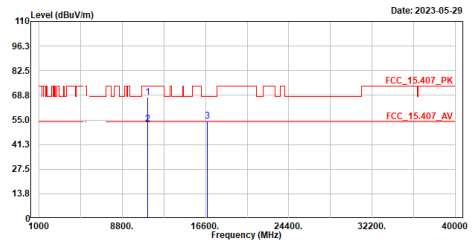

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11160.000	67.69	74.00	-6.31	75.64	-7.95	Peak
2	11160.000	52.57	54.00	-1.43	60.52	-7.95	Average
3	16740.000	54.27	68.22	-13.95	54.08	0.19	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

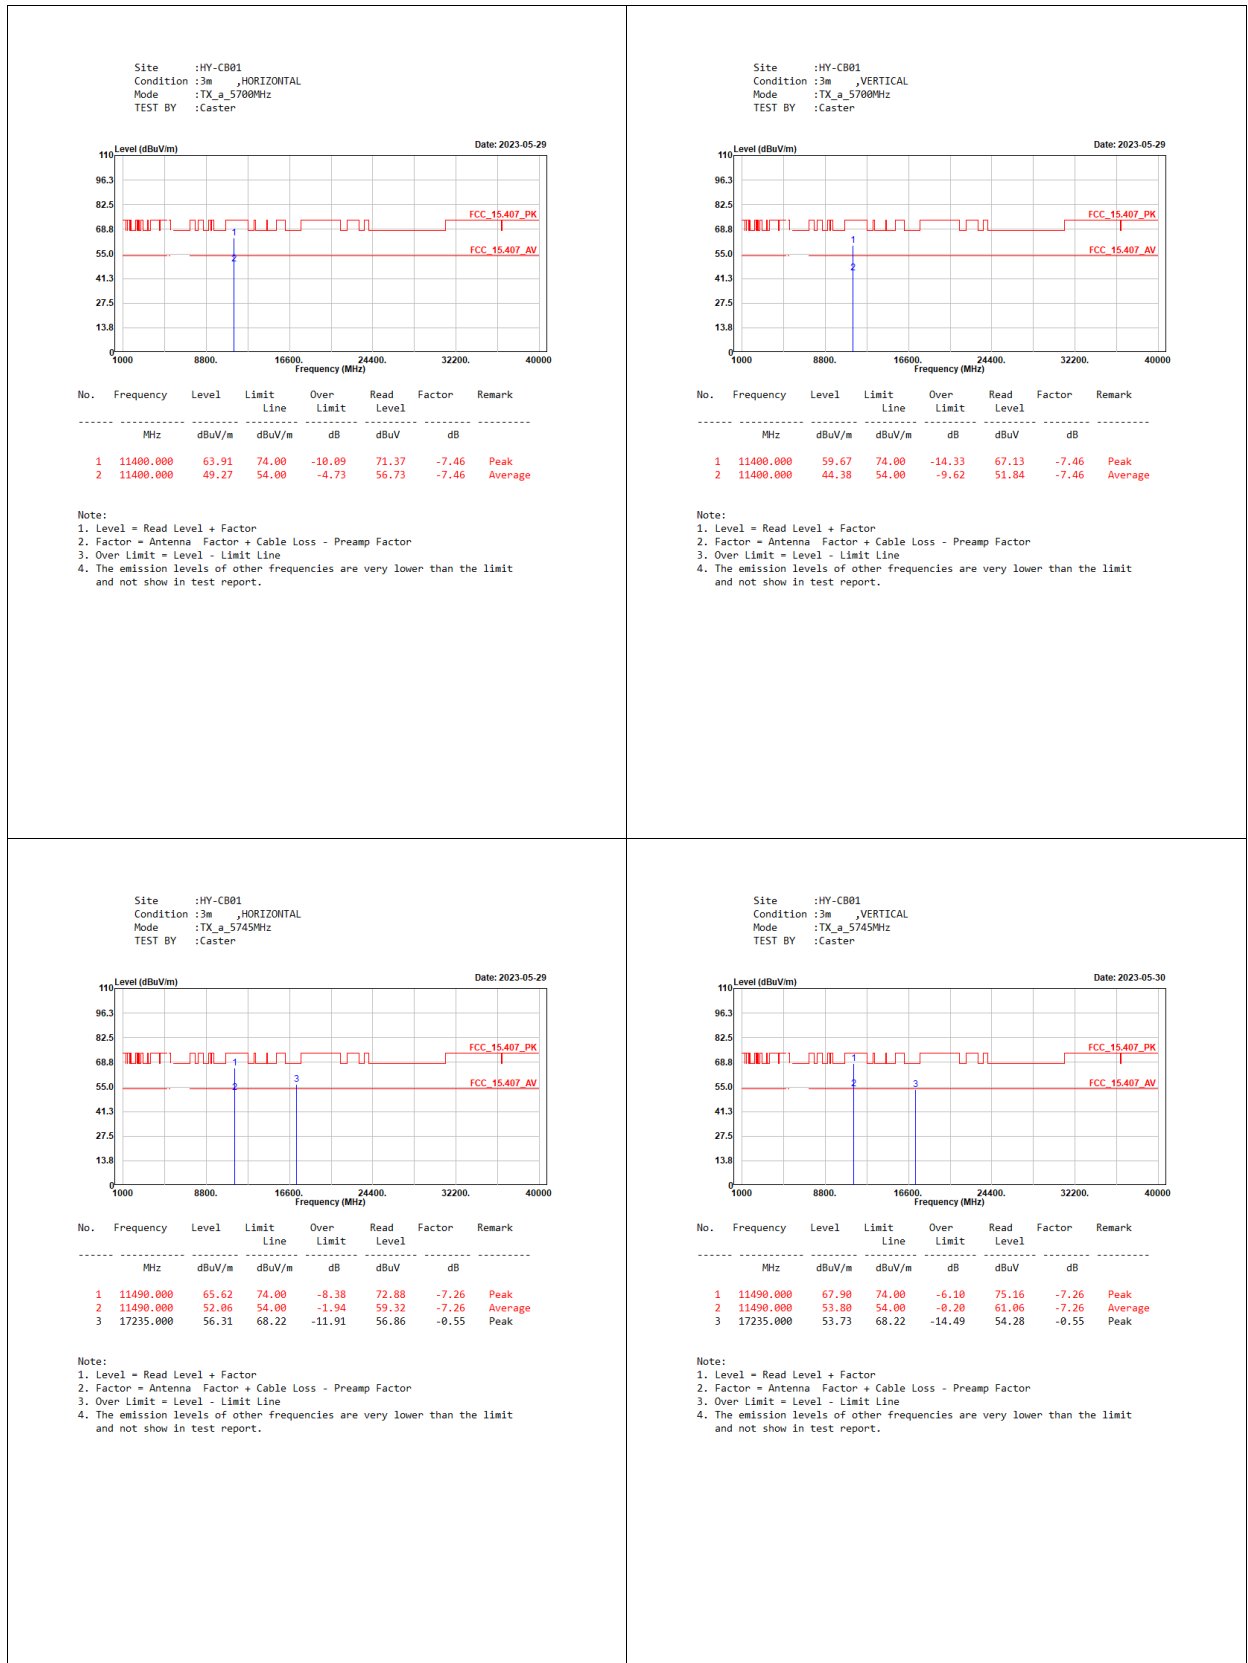

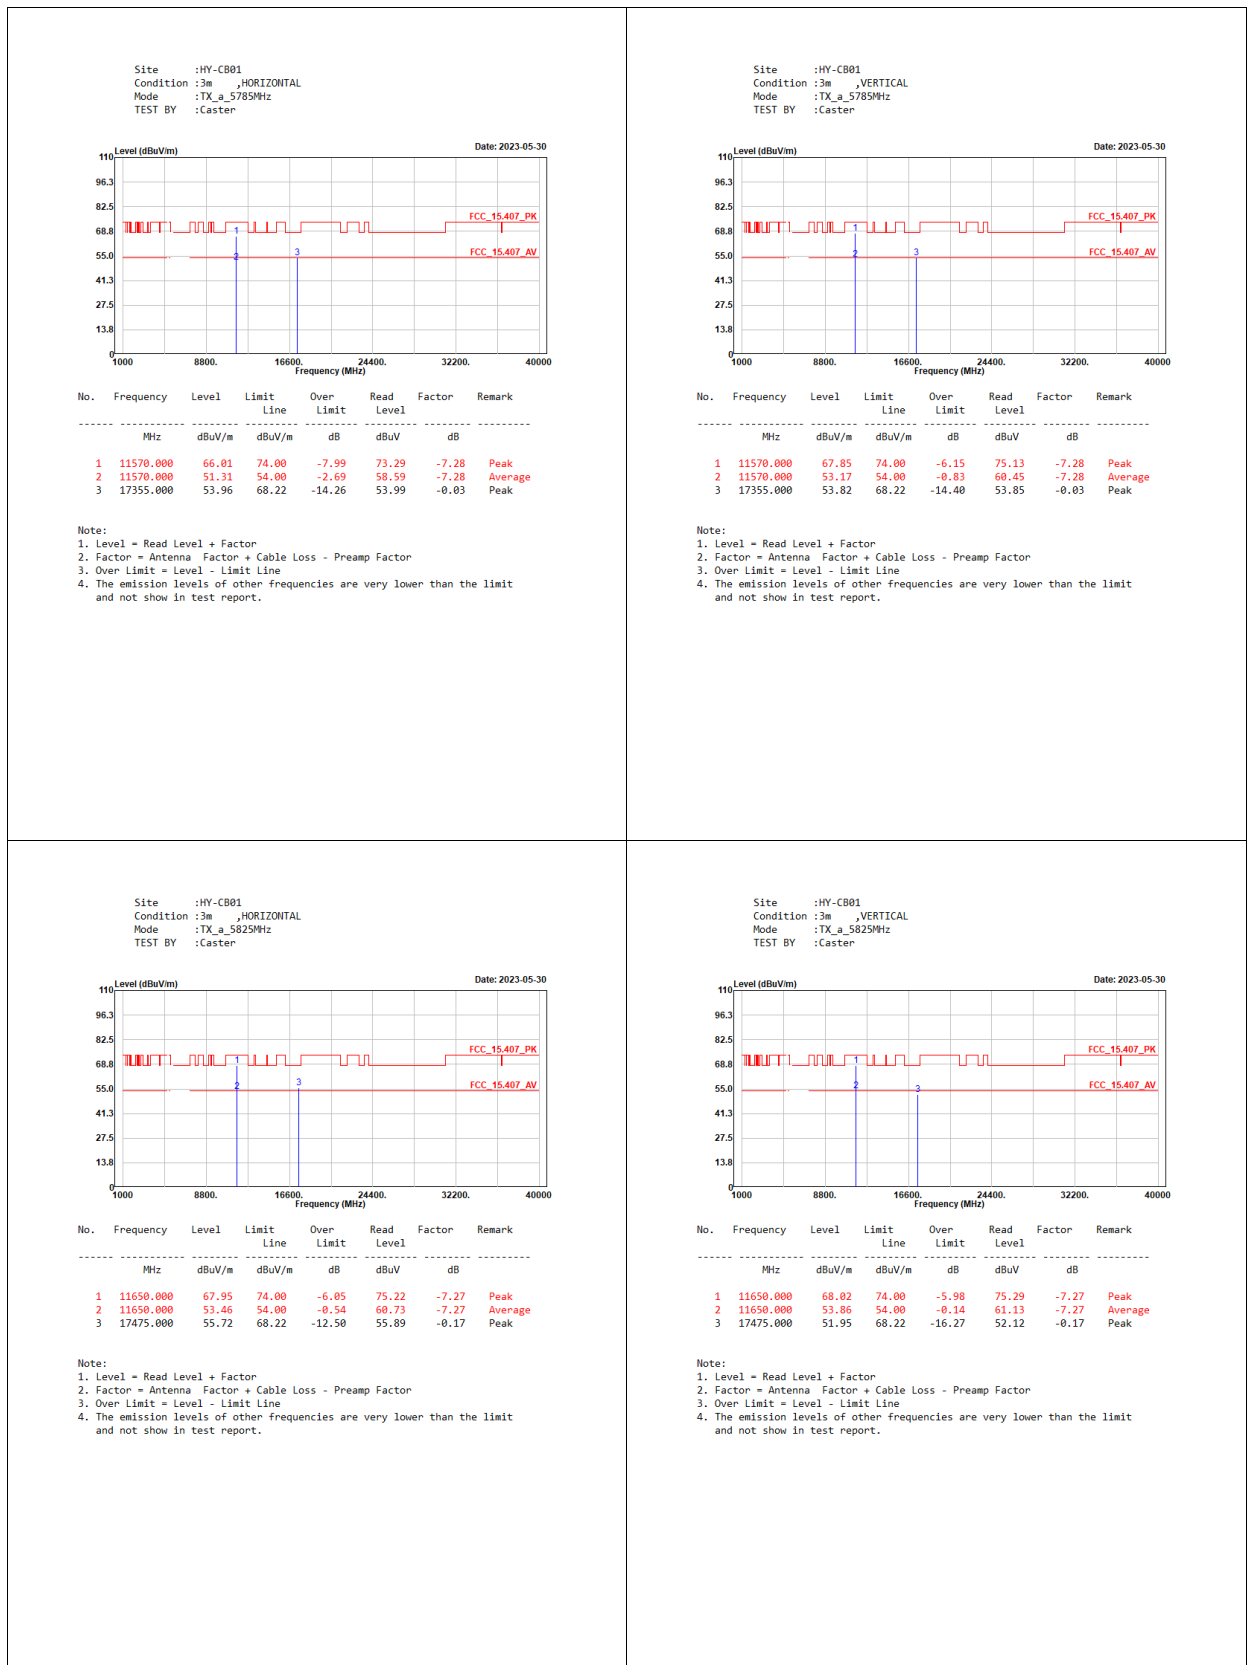


Site :HY-CB01

Condition :3m ,HORIZONTAL

Mode :TX_n20_5180MHz

TEST BY :Caster

Date: 2023-05-31

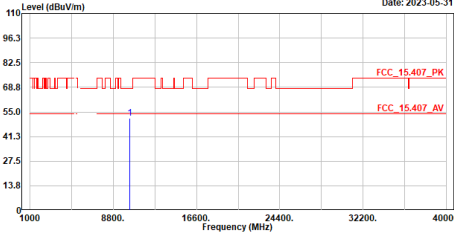

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10360.000	51.66	68.22	-16.56	68.70	-9.04	Peak

Note:

1. Level = Read Level + Factor

2. Factor = Antenna Factor + Cable Loss - Preamp Factor

3. Over Limit = Level - Limit Line

4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01

Condition :3m ,VERTICAL

Mode :TX_n20_5180MHz

TEST BY :Caster

Date: 2023-05-31

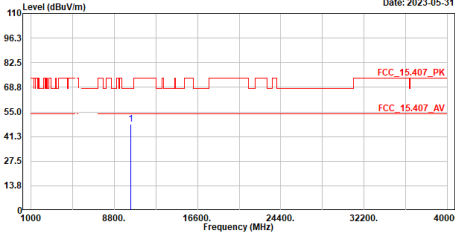

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10360.000	48.21	68.22	-20.01	57.25	-9.04	Peak

Note:

1. Level = Read Level + Factor

2. Factor = Antenna Factor + Cable Loss - Preamp Factor

3. Over Limit = Level - Limit Line

4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01

Condition :3m ,HORIZONTAL

Mode :TX_n20_5200MHz

TEST BY :Caster

Date: 2023-05-31

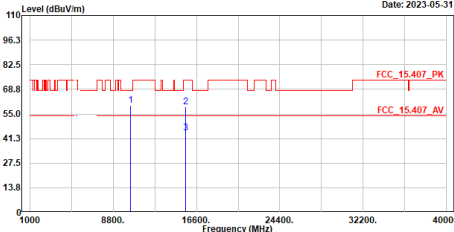

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10400.000	59.92	68.22	-8.30	68.93	-9.01	Peak
2	15600.000	58.77	74.00	-15.23	59.73	-0.96	Peak
3	15600.000	44.60	54.00	-9.40	45.56	-0.96	Average

Note:

1. Level = Read Level + Factor

2. Factor = Antenna Factor + Cable Loss - Preamp Factor

3. Over Limit = Level - Limit Line

4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01

Condition :3m ,VERTICAL

Mode :TX_n20_5200MHz

TEST BY :Caster

Date: 2023-05-31

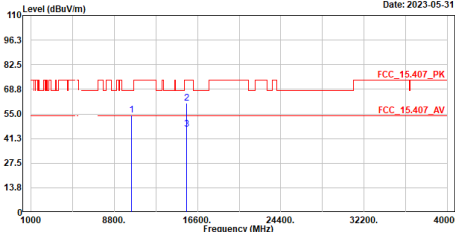

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10400.000	54.49	68.22	-13.73	63.50	-9.01	Peak
2	15600.000	61.00	74.00	-13.00	61.96	-0.96	Peak
3	15600.000	46.65	54.00	-7.35	47.61	-0.96	Average


Note:


1. Level = Read Level + Factor


2. Factor = Antenna Factor + Cable Loss - Preamp Factor


3. Over Limit = Level - Limit Line

4. The emission levels of other frequencies are very lower than the limit and not show in test report.

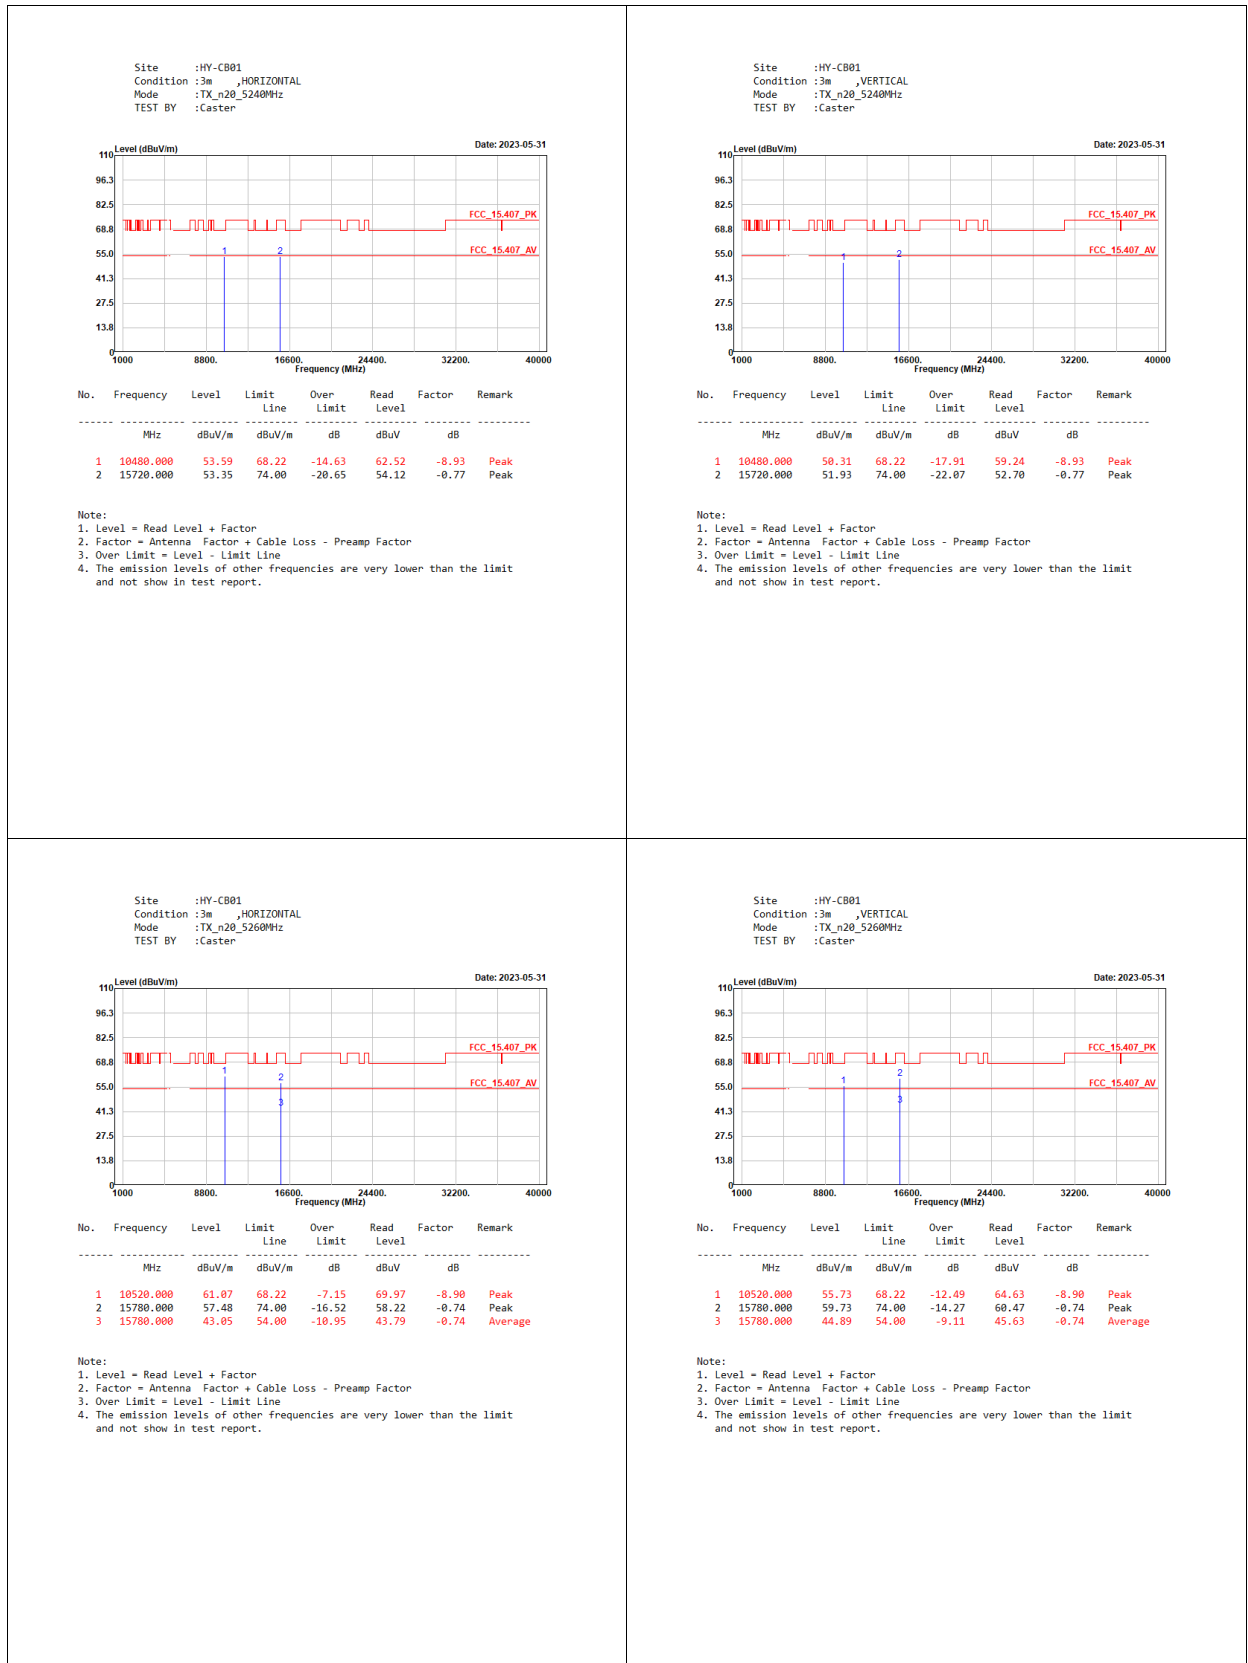


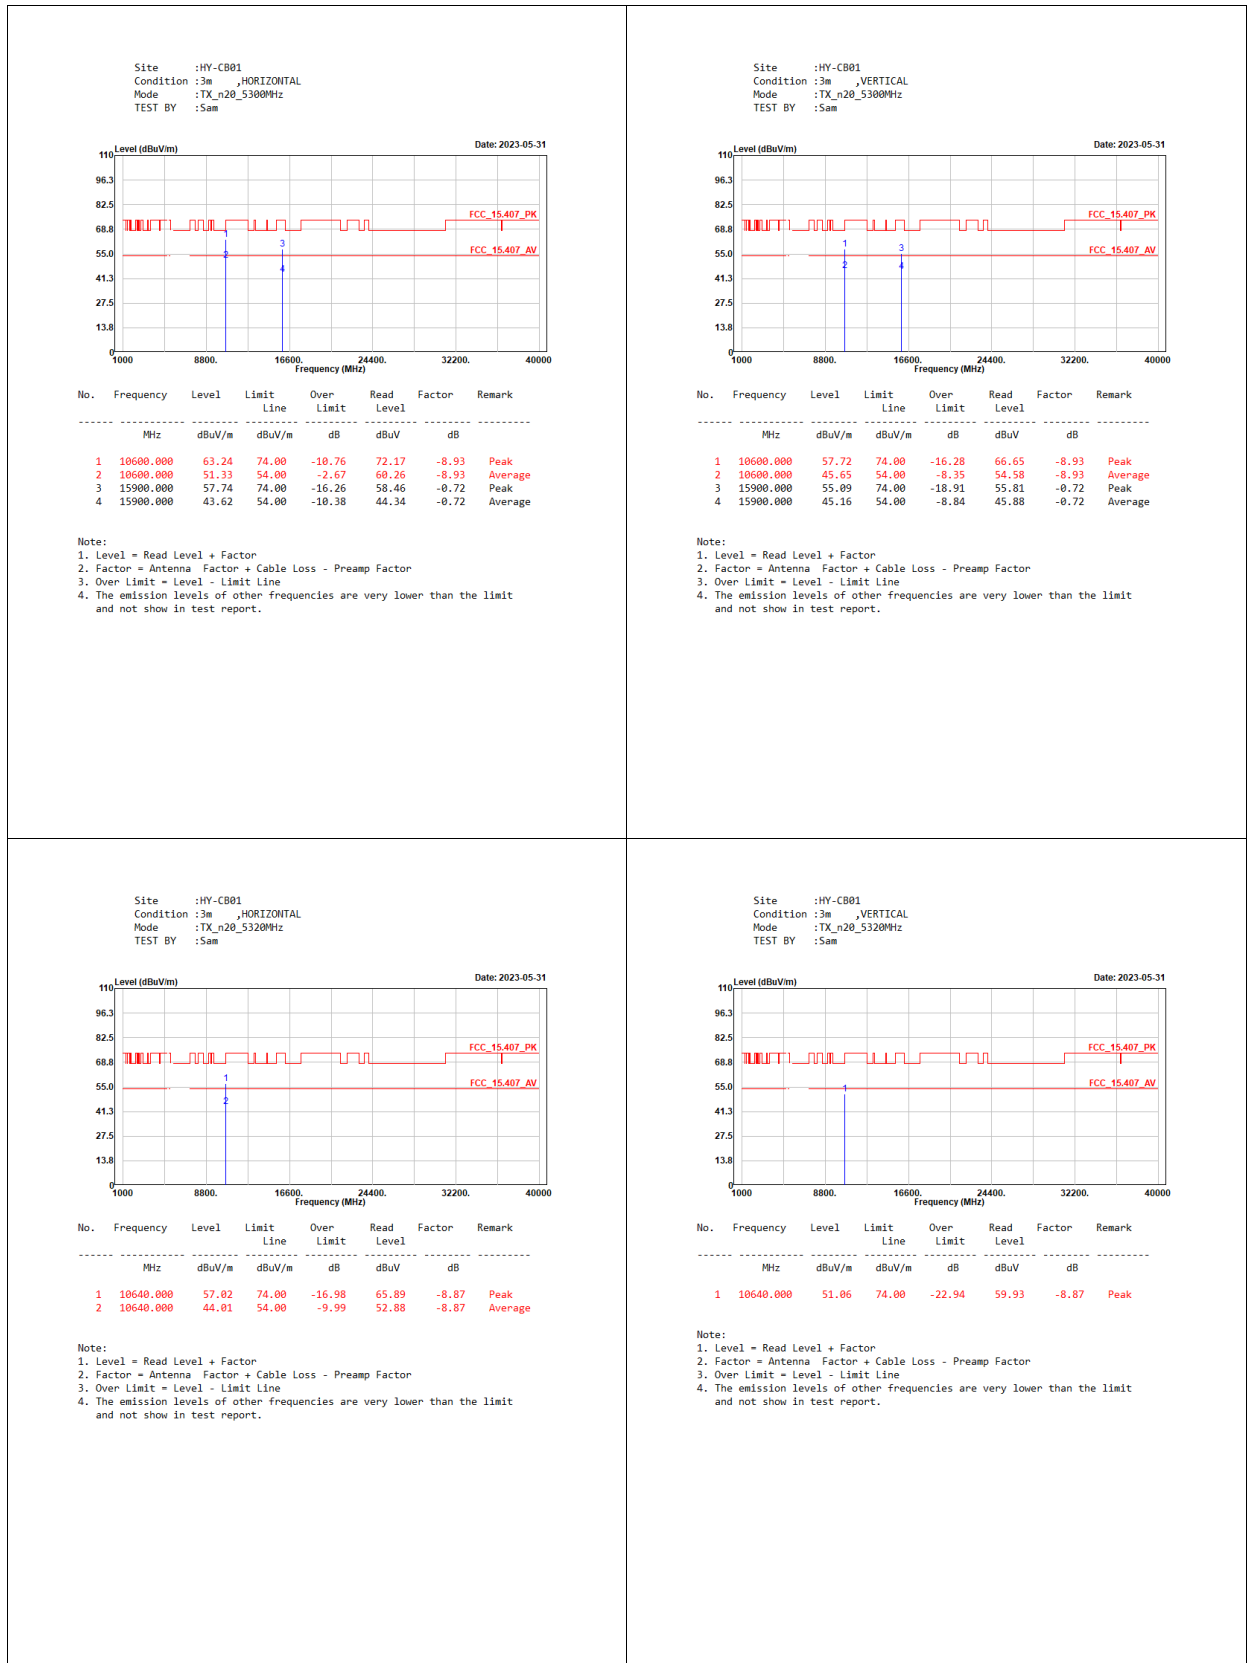

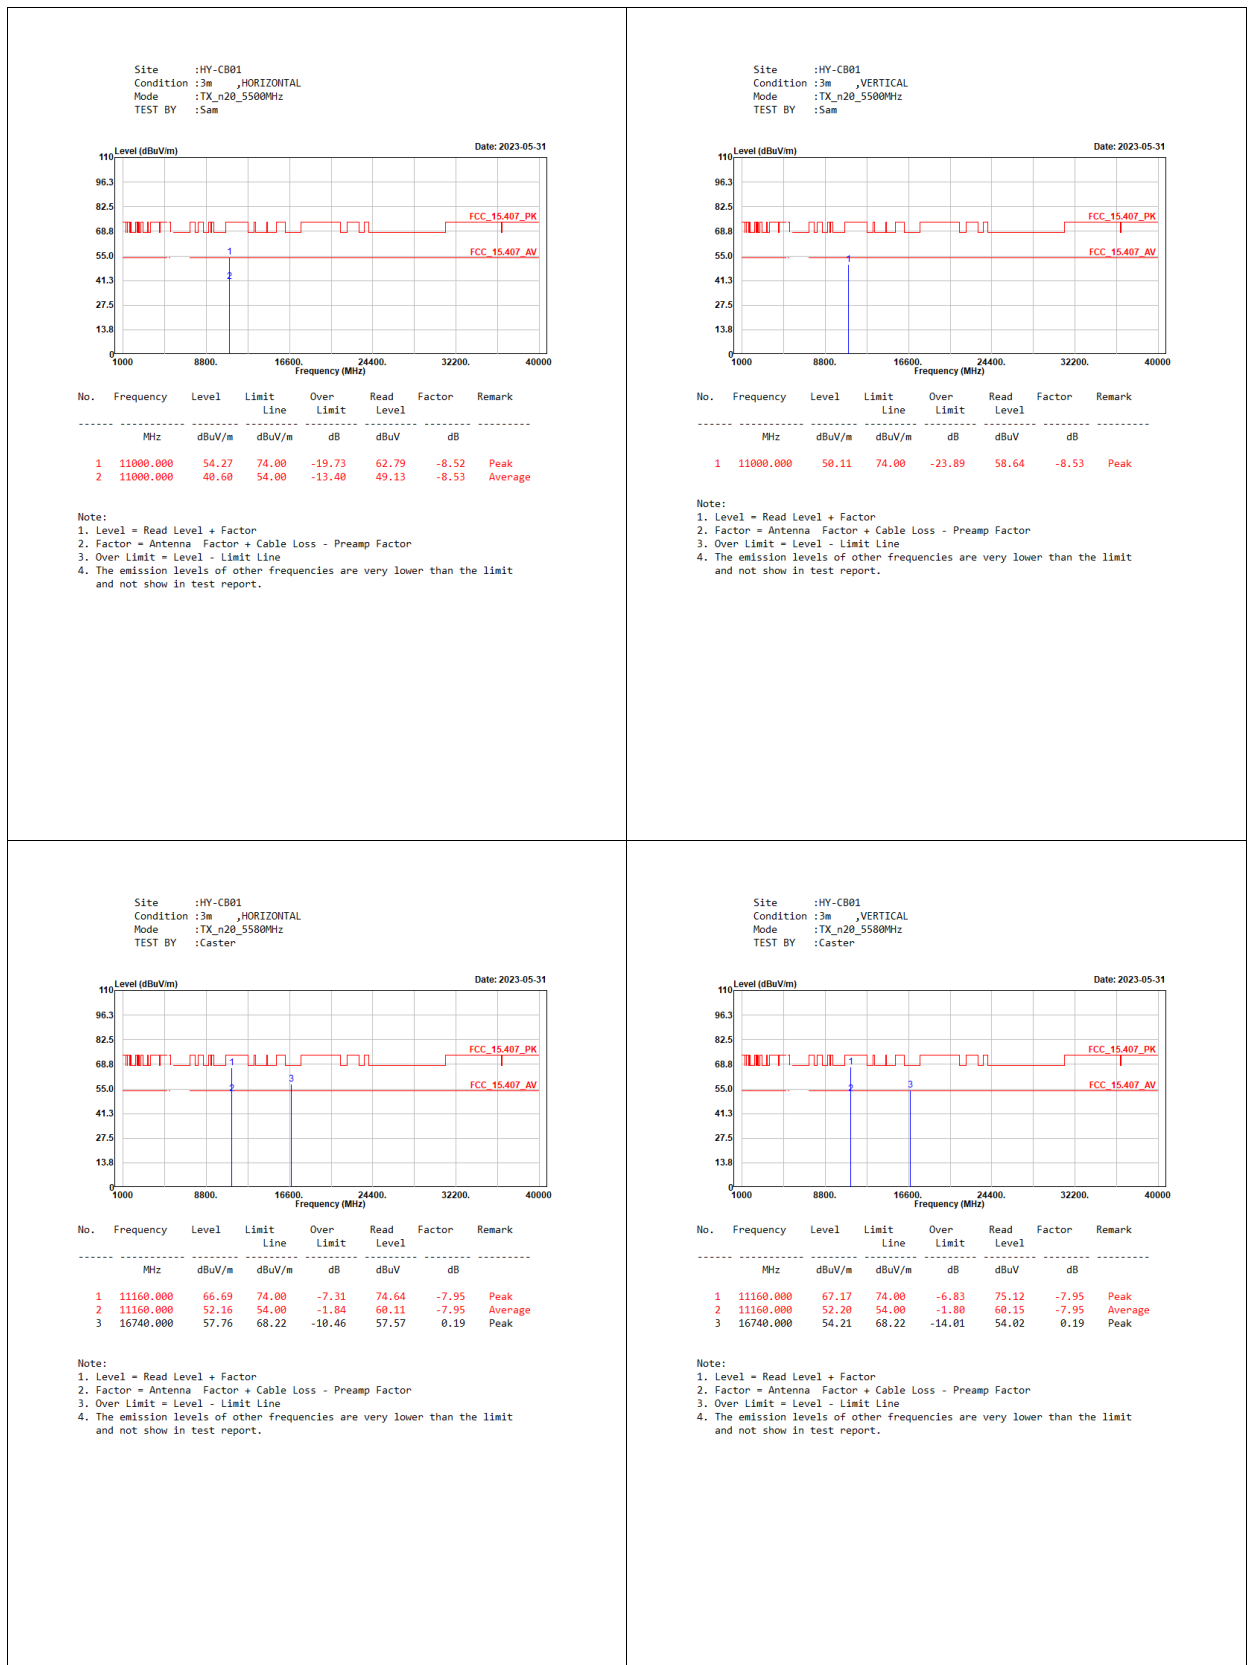

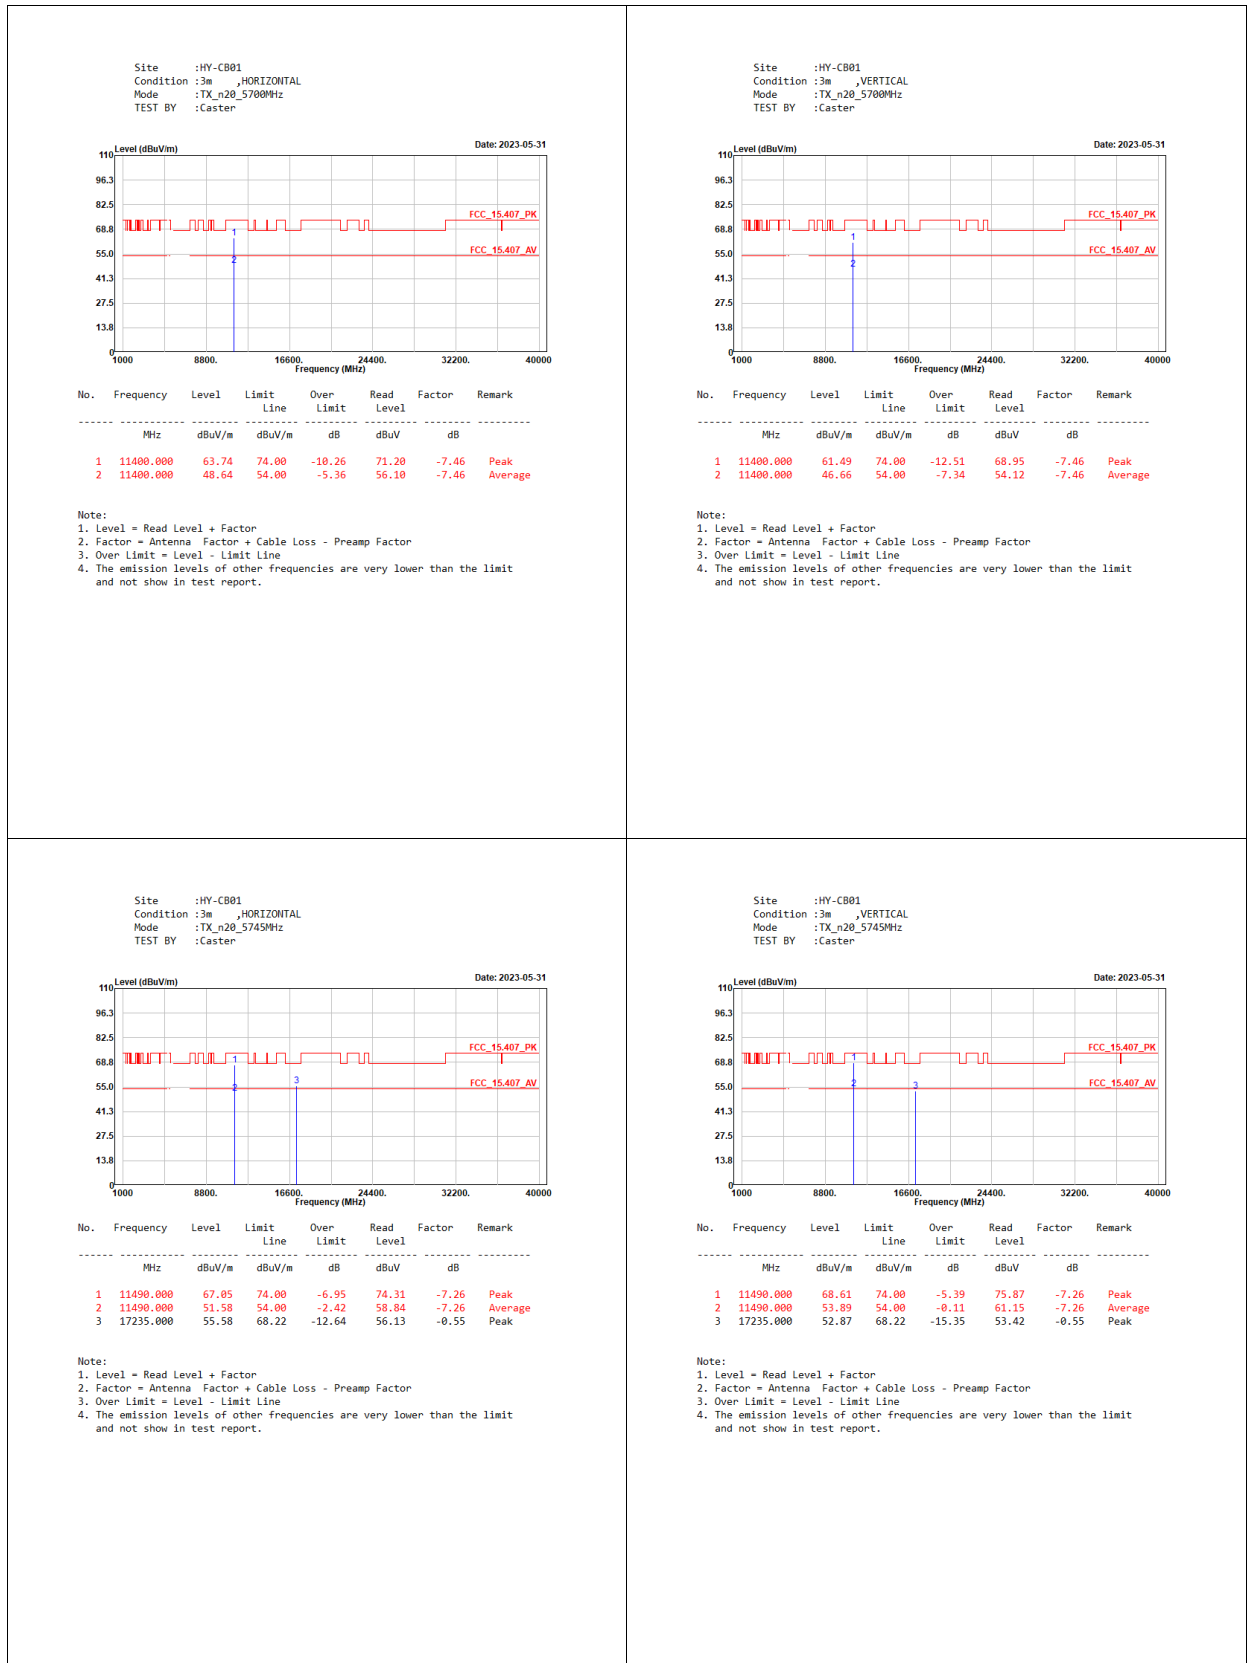

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_n20_5785MHz
TEST BY :Caster

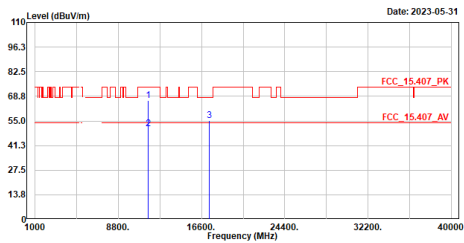


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	11570.000	66.33	74.00	-7.67	73.61	-7.28	Peak
2	11570.000	50.76	54.00	-3.24	58.04	-7.28	Average
3	17355.000	55.20	68.22	-13.02	55.23	-0.03	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_n20_5785MHz
TEST BY :Caster

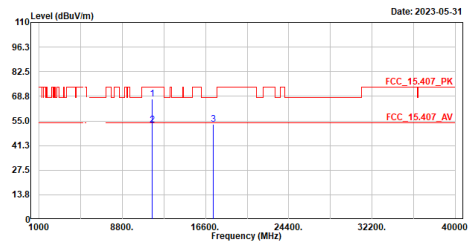


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	11570.000	67.06	74.00	-6.94	74.34	-7.28	Peak
2	11570.000	52.82	54.00	-1.18	60.10	-7.28	Average
3	17355.000	53.15	68.22	-15.07	53.18	-0.03	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_n20_5825MHz
TEST BY :Caster

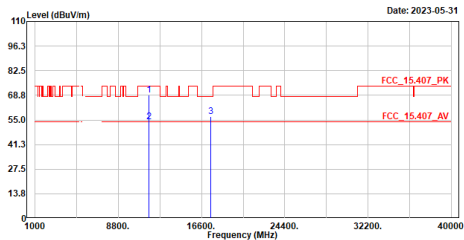


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	11650.000	69.03	74.00	-4.97	76.30	-7.27	Peak
2	11650.000	53.87	54.00	-0.13	61.14	-7.27	Average
3	17475.000	56.75	68.22	-11.47	56.92	-0.17	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_n20_5825MHz
TEST BY :Caster

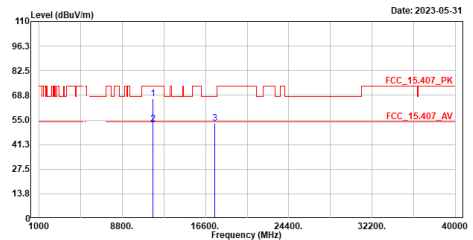


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	11650.000	66.83	74.00	-7.17	74.10	-7.27	Peak
2	11650.000	52.63	54.00	-1.37	59.90	-7.27	Average
3	17475.000	52.97	68.22	-15.25	53.14	-0.17	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_p40_5190MHz
TEST BY :Caster

Date: 2023-05-31

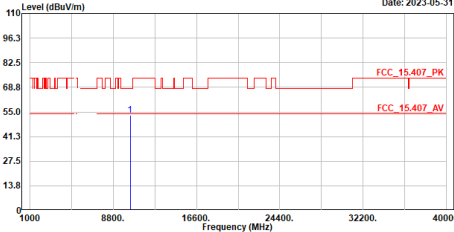


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10380.000	52.95	68.22	-15.27	61.98	-9.03	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_p40_5190MHz
TEST BY :Caster

Date: 2023-05-31

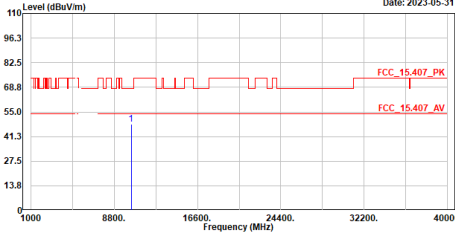


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10380.000	47.95	68.22	-20.27	56.98	-9.03	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_p40_5230MHz
TEST BY :Caster

Date: 2023-05-31

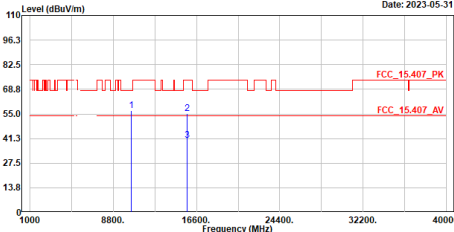


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10460.000	56.90	68.22	-11.32	65.85	-8.95	Peak
2	15690.000	55.21	74.00	-18.79	55.98	-0.77	Peak
3	15690.000	40.35	54.00	-13.65	41.12	-0.77	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_p40_5230MHz
TEST BY :Caster


Date: 2023-05-31

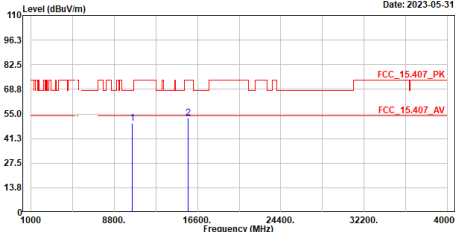


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10460.000	49.84	68.22	-18.38	58.79	-8.95	Peak
2	15690.000	52.77	74.00	-21.23	53.54	-0.77	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

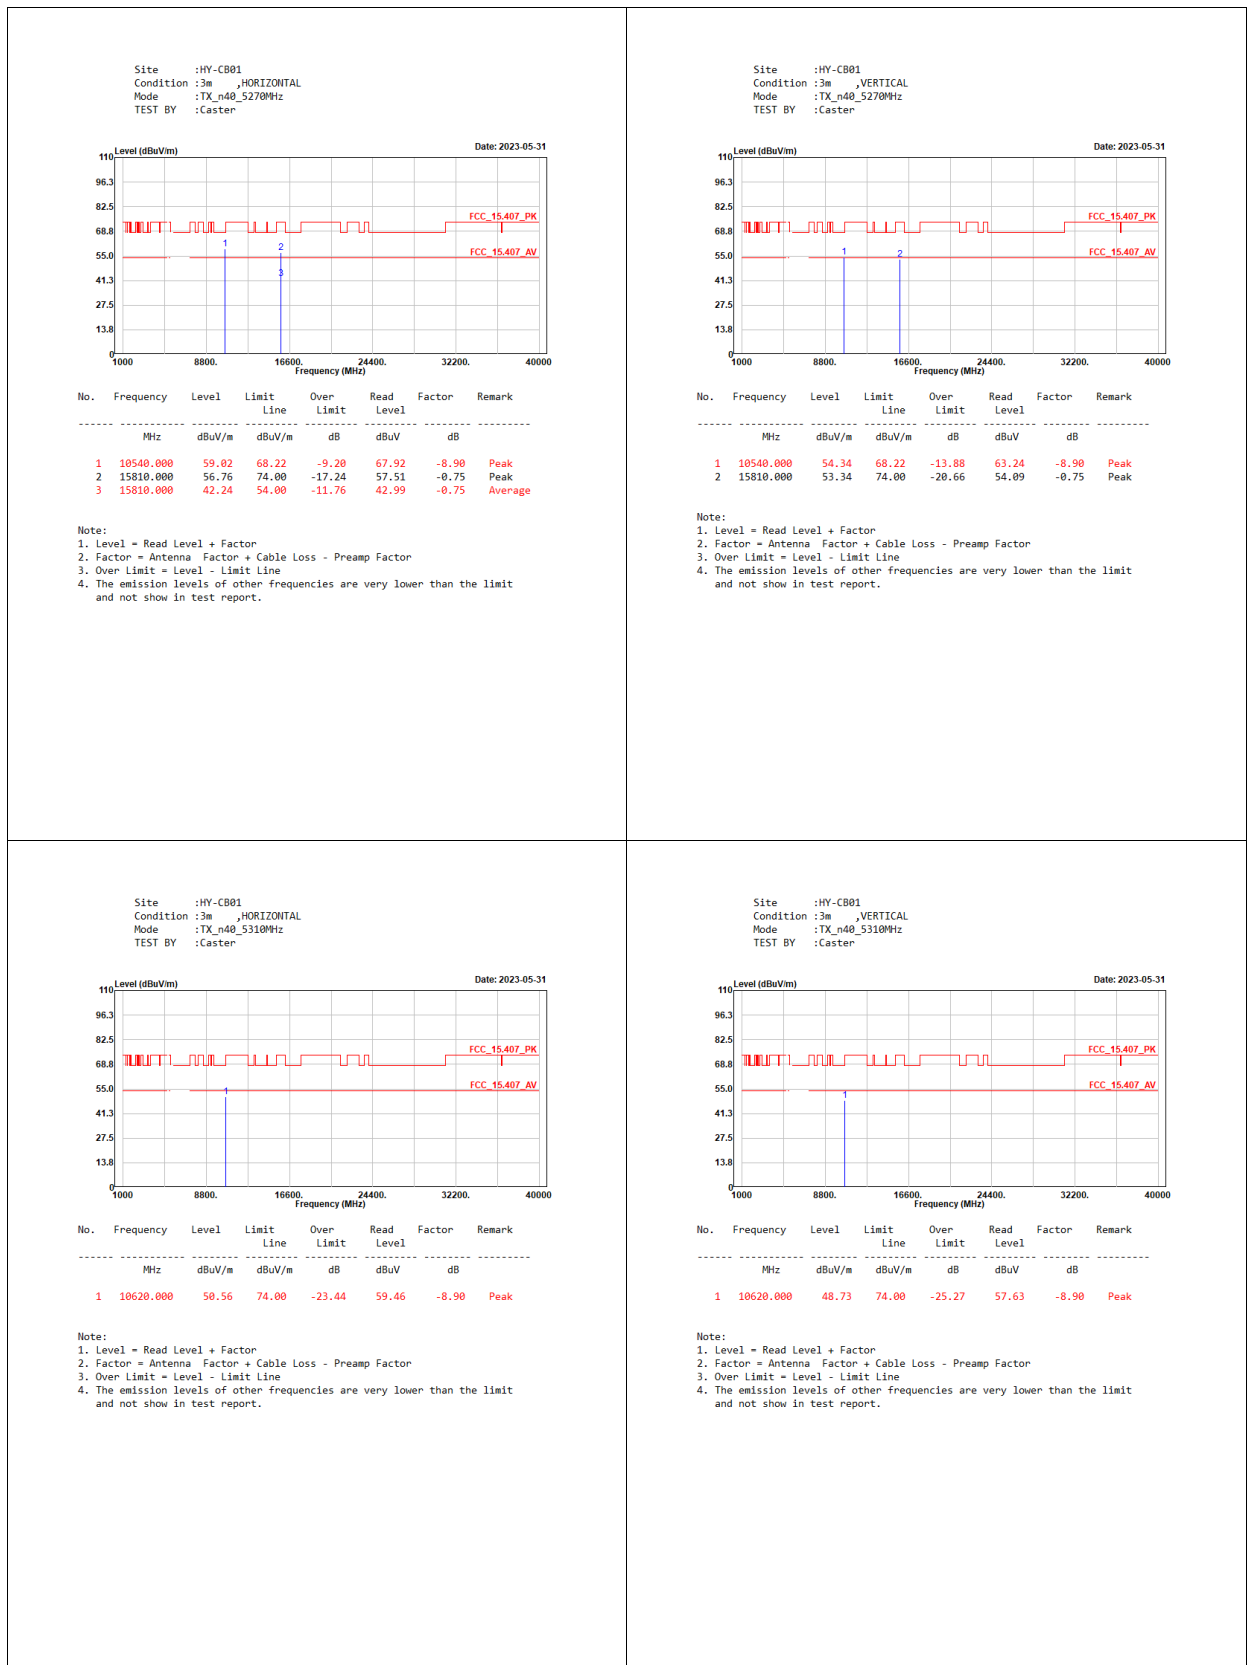


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_p40_5510MHz
TEST BY :Caster

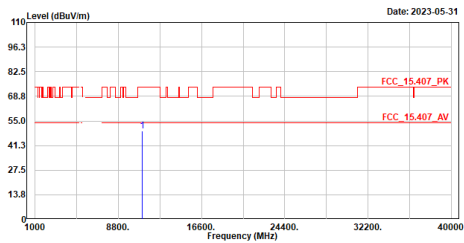

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11020.000	49.43	74.00	-24.57	58.00	-8.57	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_p40_5510MHz
TEST BY :Caster

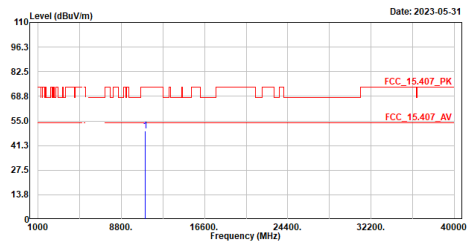

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11020.000	49.31	74.00	-24.69	57.88	-8.57	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_p40_5550MHz
TEST BY :Caster

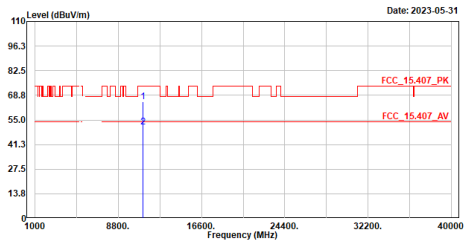

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11100.000	64.99	74.00	-9.01	73.19	-8.20	Peak
2	11100.000	51.03	54.00	-2.97	59.23	-8.20	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_p40_5550MHz
TEST BY :Caster

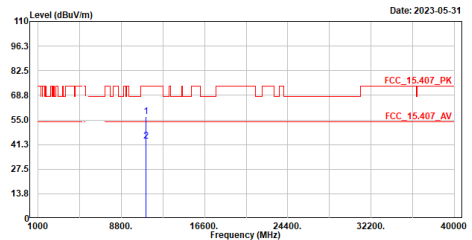


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11100.000	56.91	74.00	-17.09	65.11	-8.20	Peak
2	11100.000	43.31	54.00	-10.69	51.51	-8.20	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_n40_5670MHz
TEST BY :Caster

Date: 2023-05-31

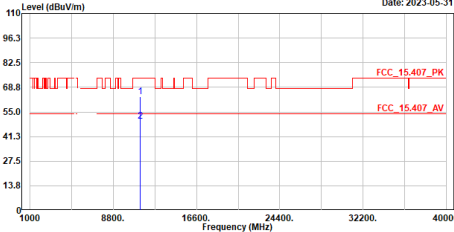


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11340.000	63.43	74.00	-10.57	70.96	-7.53	Peak
2	11340.000	49.77	54.00	-4.23	57.30	-7.53	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_n40_5670MHz
TEST BY :Caster

Date: 2023-05-31

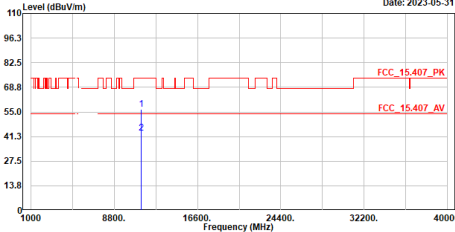


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11340.000	56.61	74.00	-17.39	64.14	-7.53	Peak
2	11340.000	43.37	54.00	-10.63	50.90	-7.53	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_n40_5755MHz
TEST BY :Caster

Date: 2023-05-31

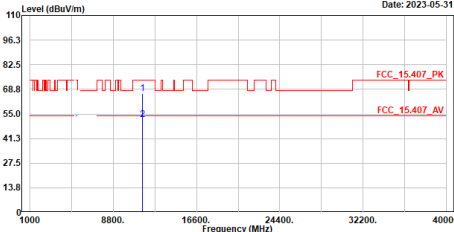


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11510.000	66.37	74.00	-7.63	73.62	-7.25	Peak
2	11510.000	51.95	54.00	-2.05	59.20	-7.25	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_n40_5755MHz
TEST BY :Caster


Date: 2023-05-31

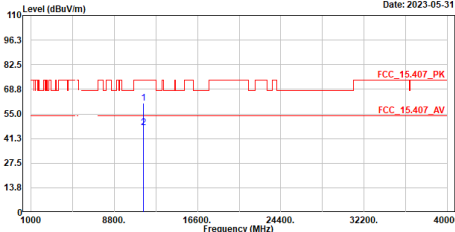


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11510.000	60.98	74.00	-13.02	68.23	-7.25	Peak
2	11510.000	47.50	54.00	-6.50	54.75	-7.25	Average


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

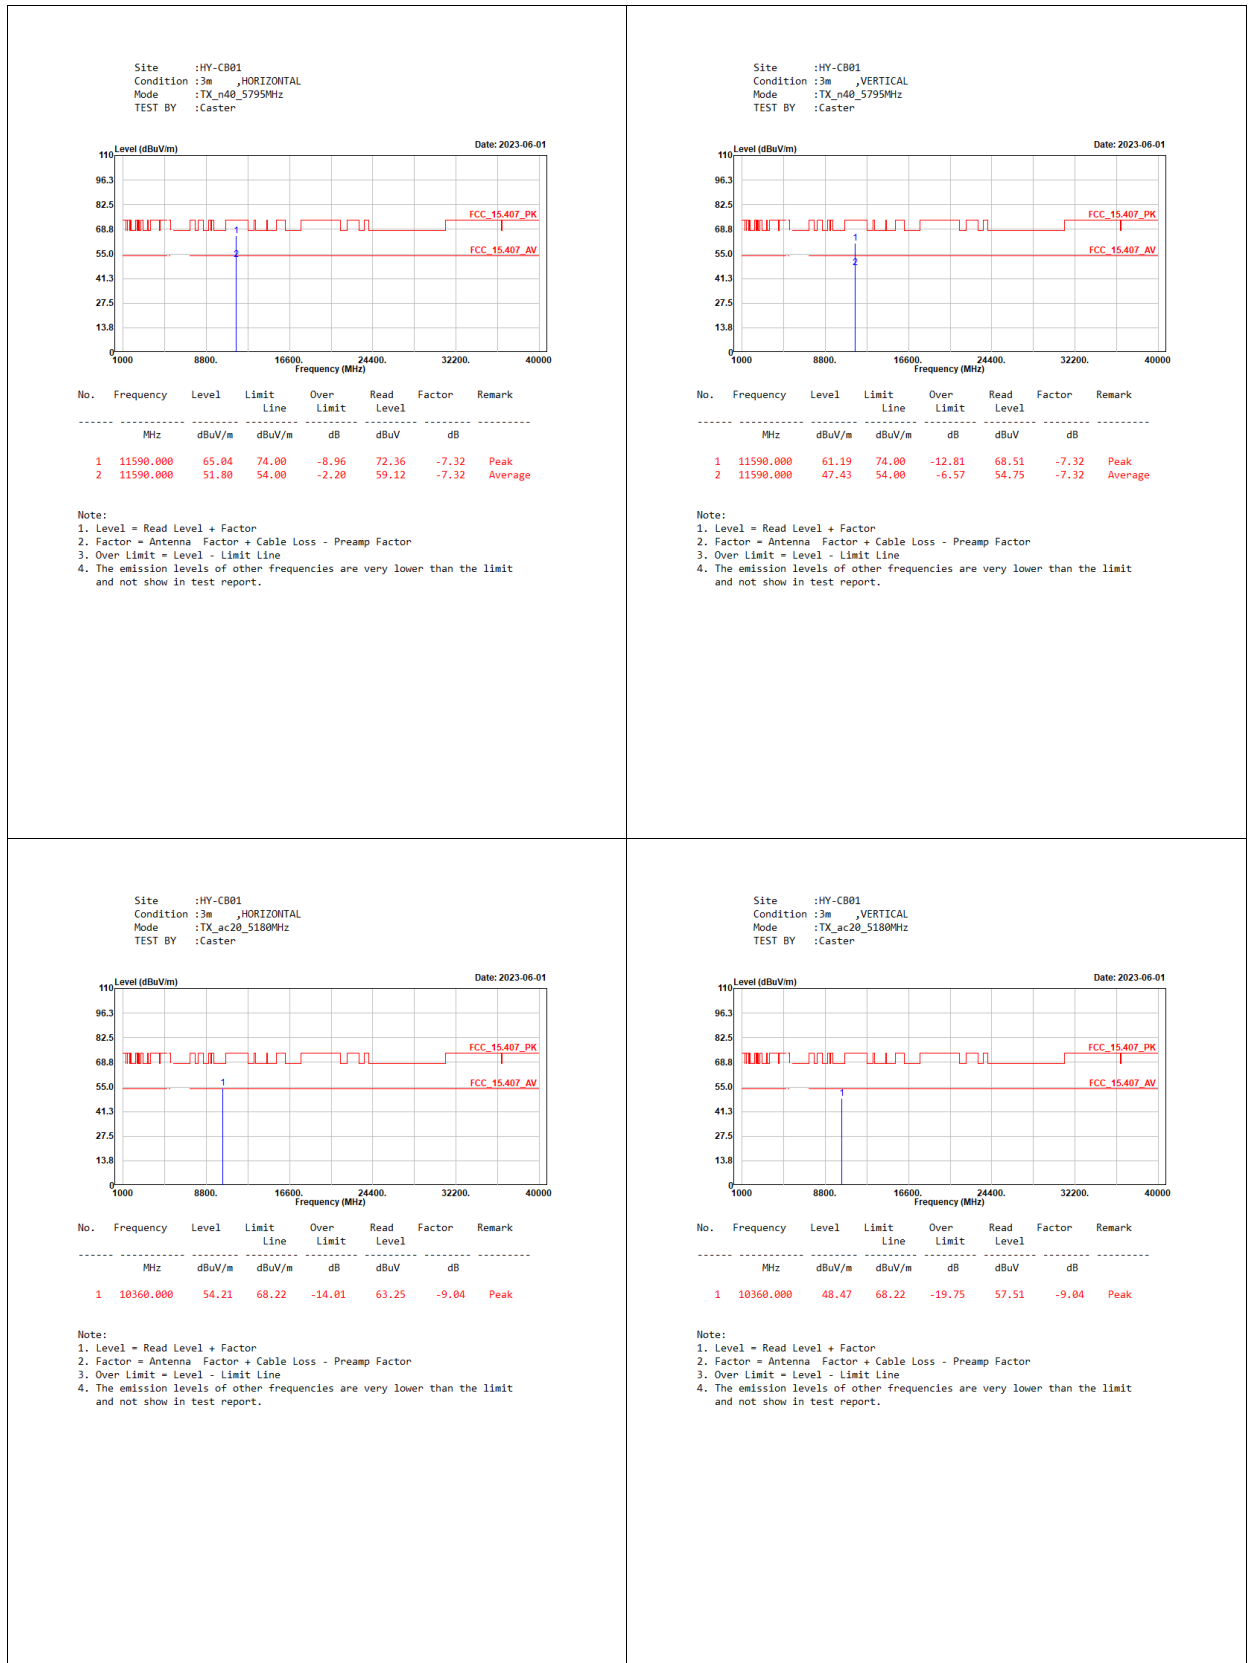

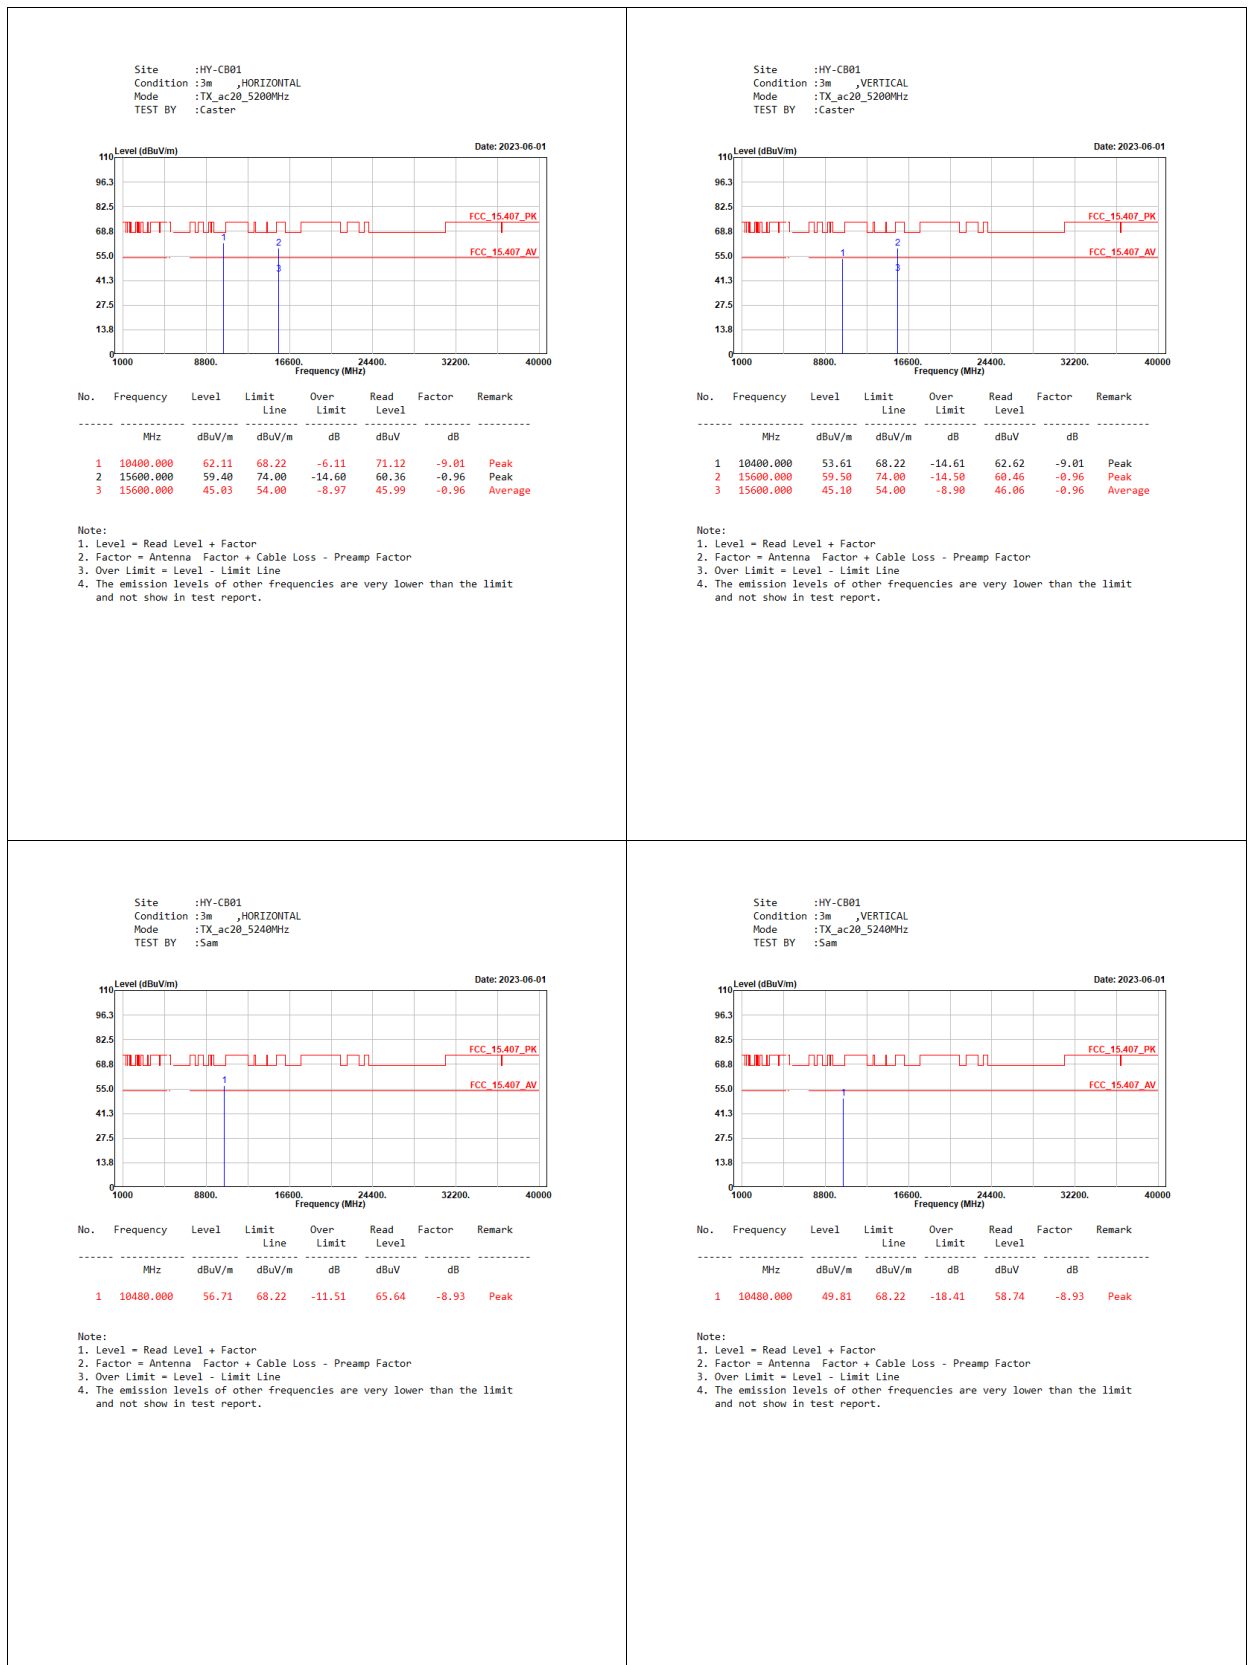


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac20_5260MHz
TEST BY :Sam

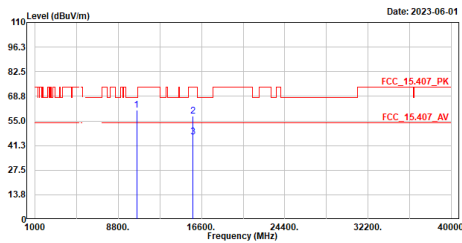

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	10520.000	60.91	68.22	-7.31	69.81	-8.90	Peak
2	15780.000	57.55	74.00	-16.45	58.29	-0.74	Peak
3	15780.000	46.10	54.00	-7.90	46.84	-0.74	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac20_5260MHz
TEST BY :Sam

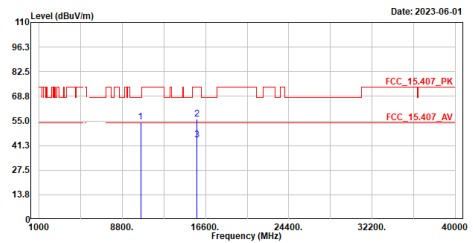

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	10520.000	54.54	68.22	-13.68	63.44	-8.90	Peak
2	15780.000	56.02	74.00	-17.98	56.76	-0.74	Peak
3	15780.000	44.29	54.00	-9.71	45.03	-0.74	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac20_5300MHz
TEST BY :Caster

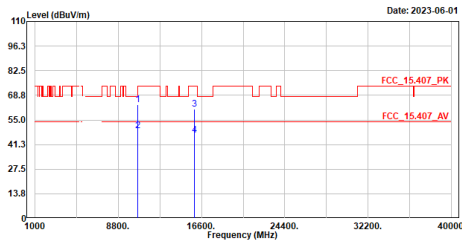

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	10600.000	63.64	74.00	-10.36	72.57	-8.93	Peak
2	10600.000	48.94	54.00	-5.06	57.87	-8.93	Average
3	15900.000	61.16	74.00	-12.84	61.88	-0.72	Peak
4	15900.000	46.46	54.00	-7.54	47.18	-0.72	Average


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac20_5300MHz
TEST BY :Caster

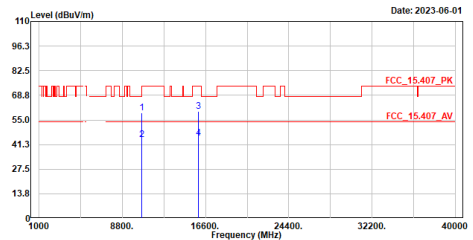


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	10600.000	58.94	74.00	-15.06	67.87	-8.93	Peak
2	10600.000	44.04	54.00	-9.96	52.97	-8.93	Average
3	15900.000	59.88	74.00	-14.12	60.60	-0.72	Peak
4	15900.000	44.73	54.00	-9.27	45.45	-0.72	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

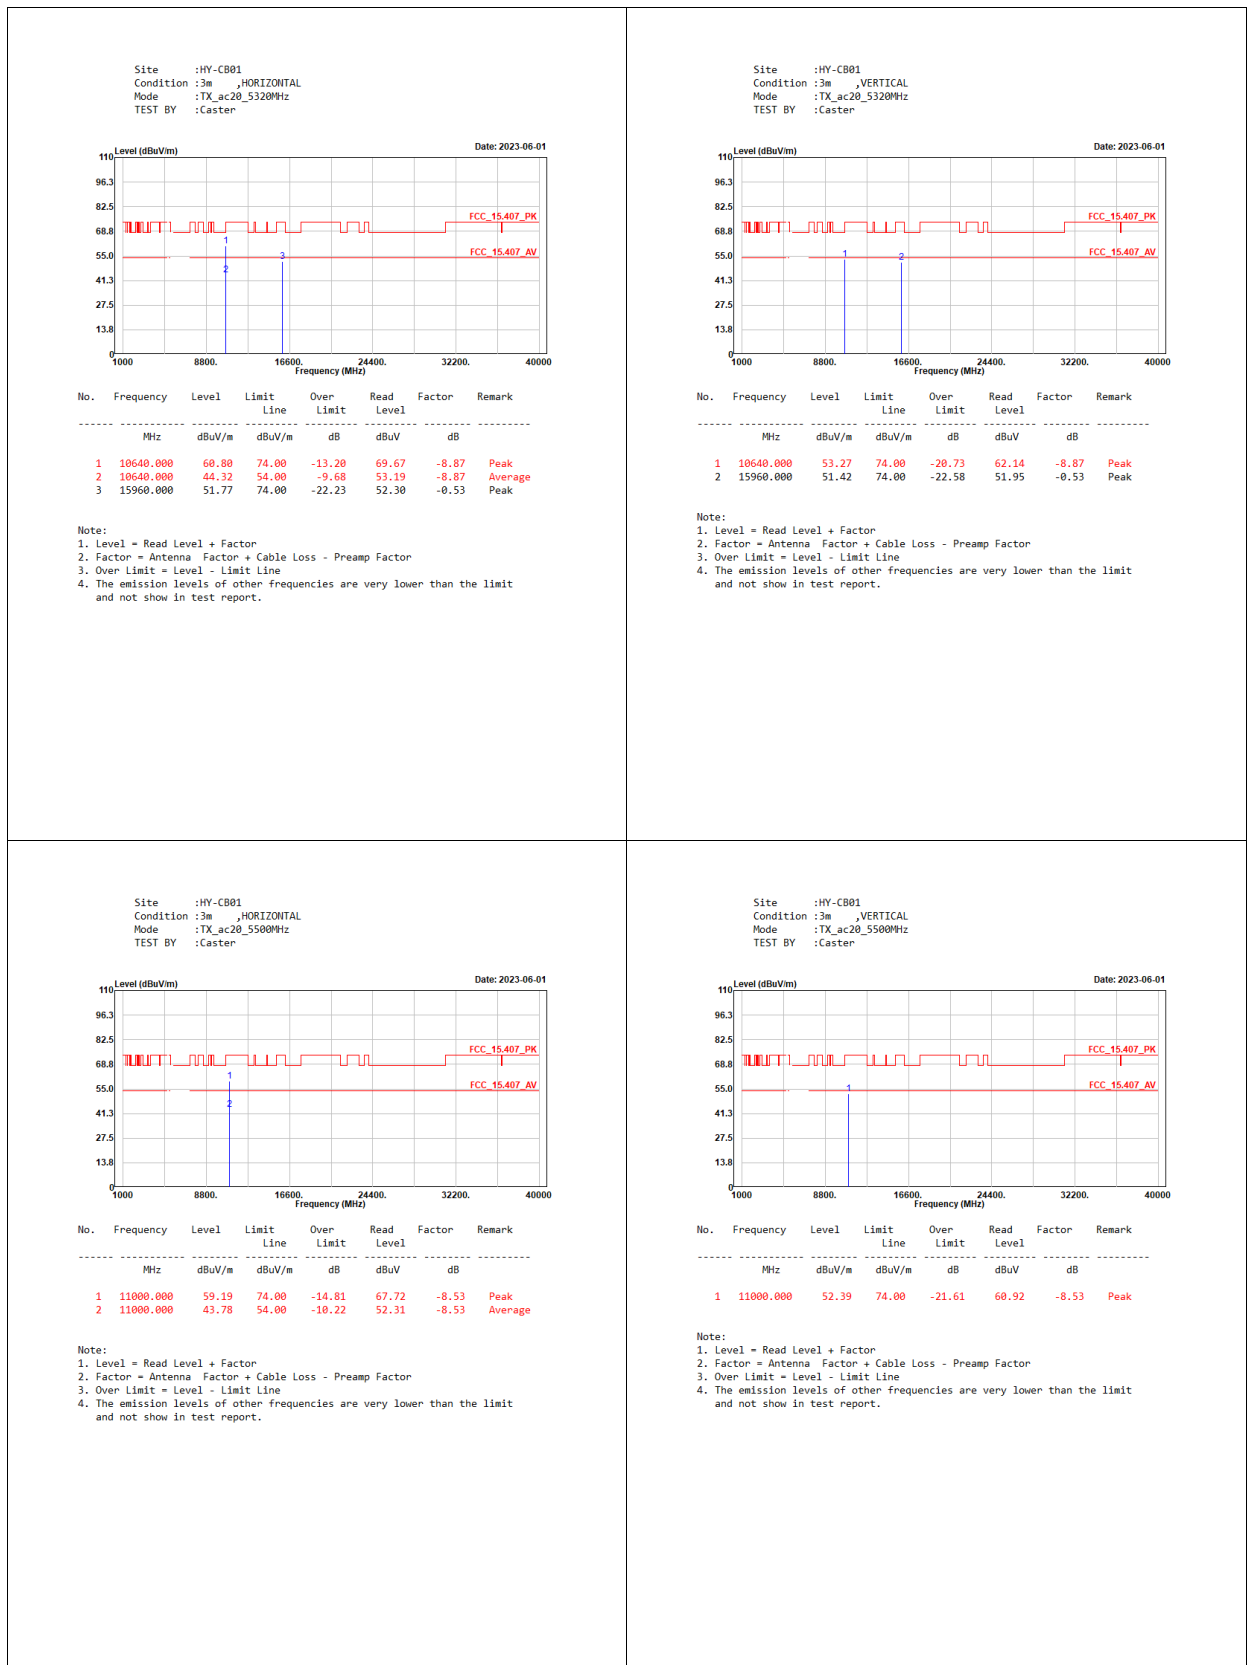

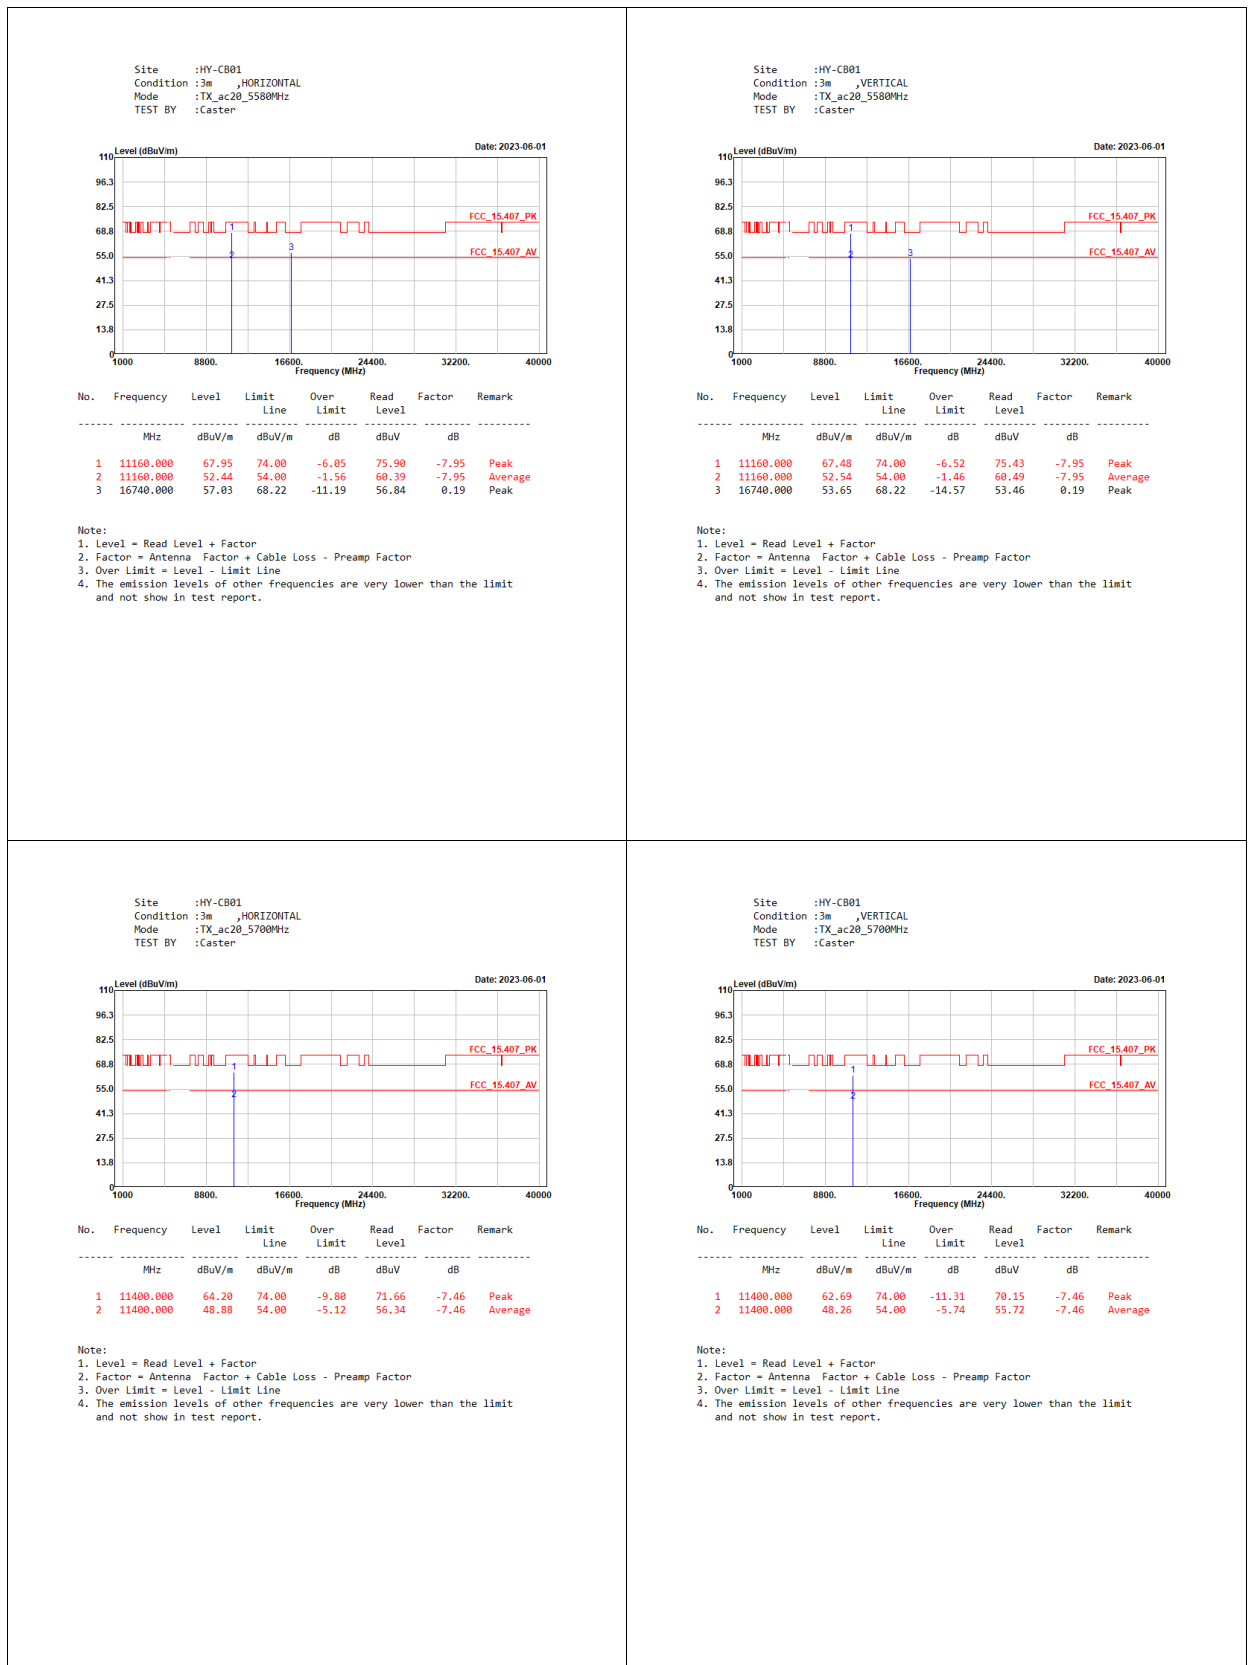


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac20_5745MHz
TEST BY :Caster

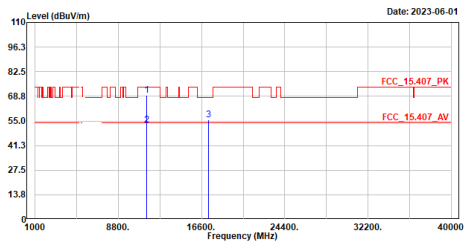

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11490.000	69.13	74.00	-4.87	76.39	-7.26	Peak
2	11490.000	52.83	54.00	-1.17	60.09	-7.26	Average
3	17235.000	55.60	68.22	-12.62	56.15	-0.55	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac20_5745MHz
TEST BY :Caster

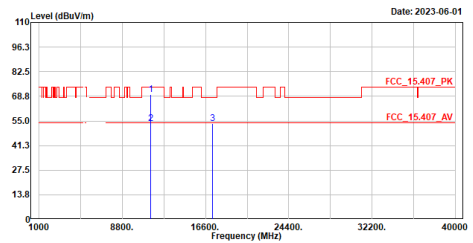

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11490.000	69.61	74.00	-4.39	76.87	-7.26	Peak
2	11490.000	53.73	54.00	-0.27	60.99	-7.26	Average
3	17235.000	53.45	68.22	-14.77	54.00	-0.55	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac20_5785MHz
TEST BY :Caster

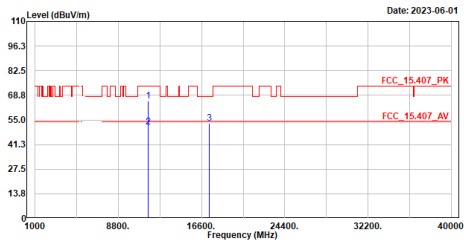

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11570.000	65.65	74.00	-8.35	72.93	-7.28	Peak
2	11570.000	51.18	54.00	-2.82	58.46	-7.28	Average
3	17355.000	53.01	68.22	-15.21	53.04	-0.03	Peak


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac20_5785MHz
TEST BY :Caster

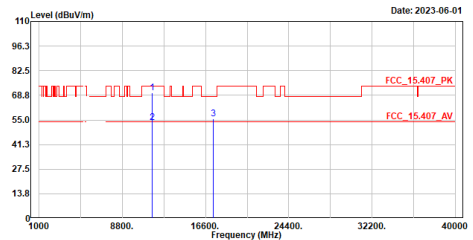

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11570.000	70.28	74.00	-3.72	77.56	-7.28	Peak
2	11570.000	53.58	54.00	-0.42	60.86	-7.28	Average
3	17355.000	55.82	68.22	-12.40	55.85	-0.03	Peak


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

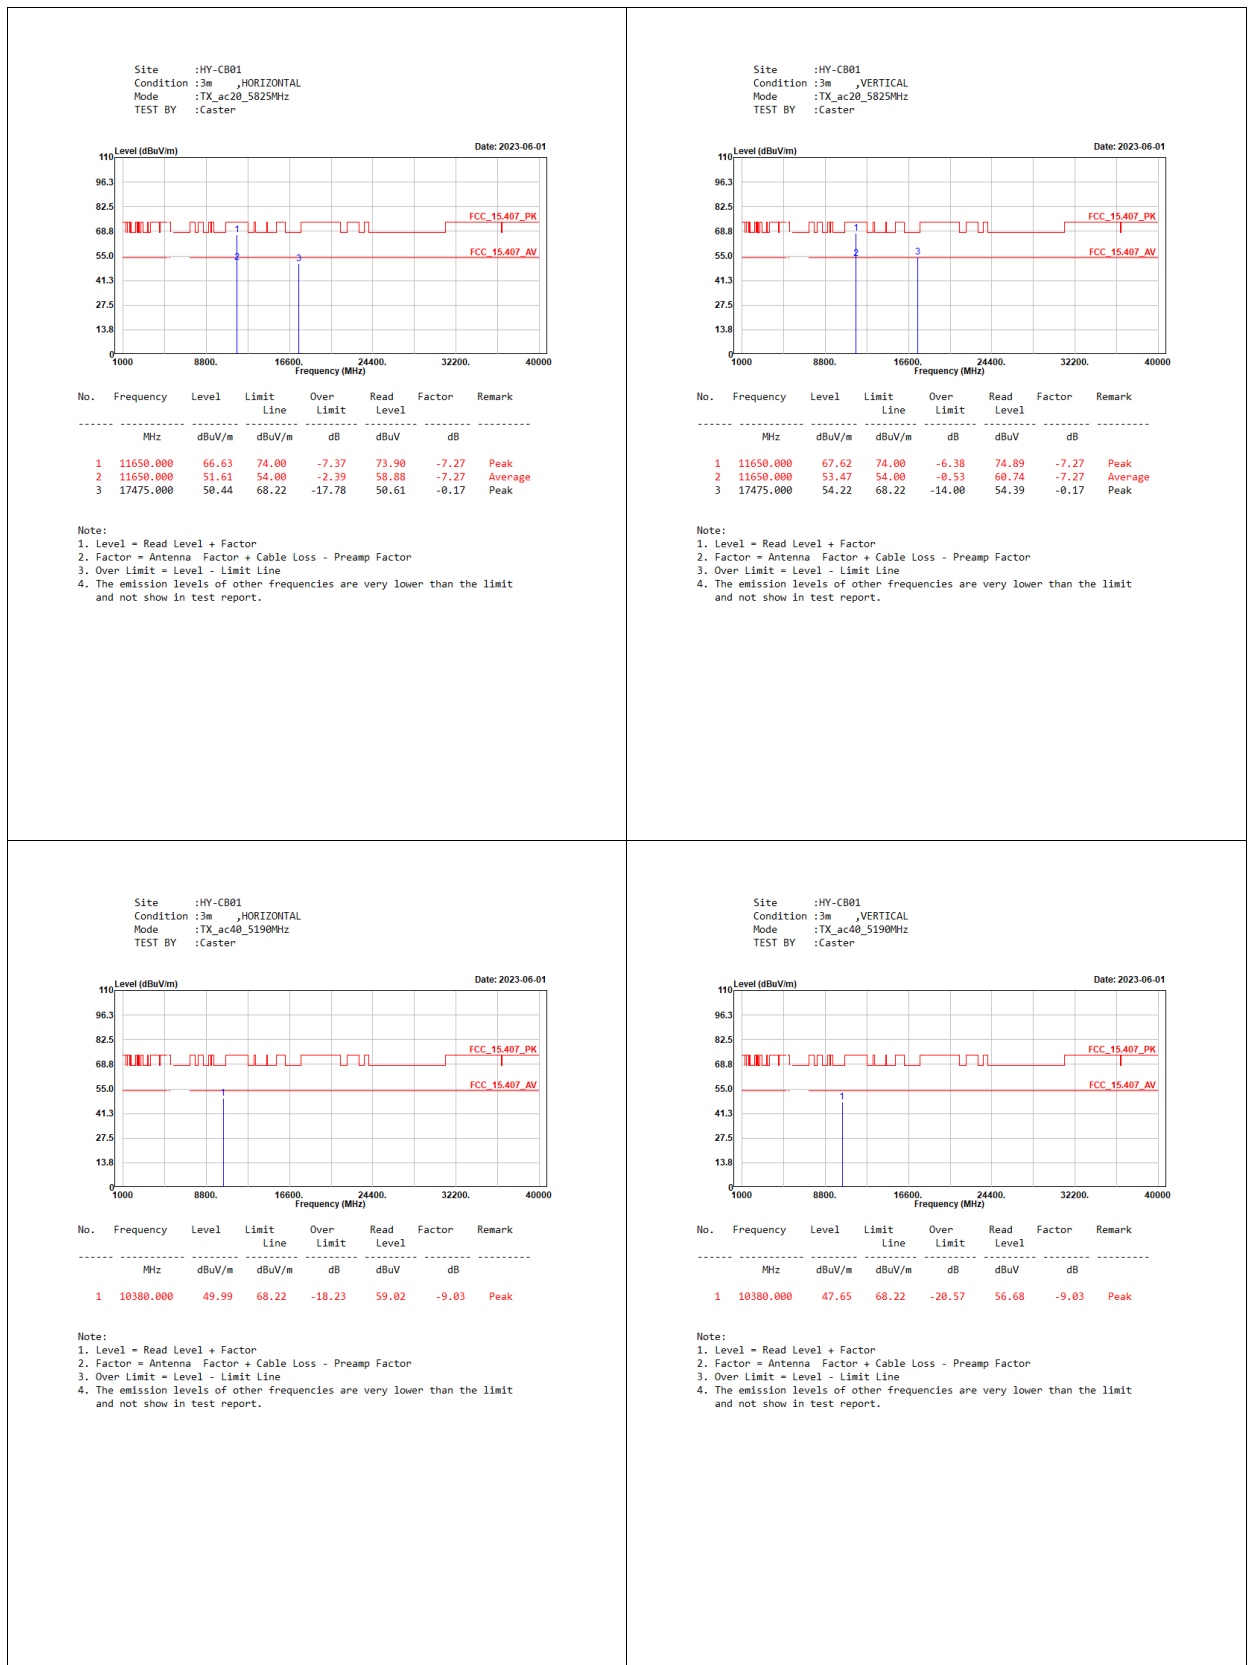

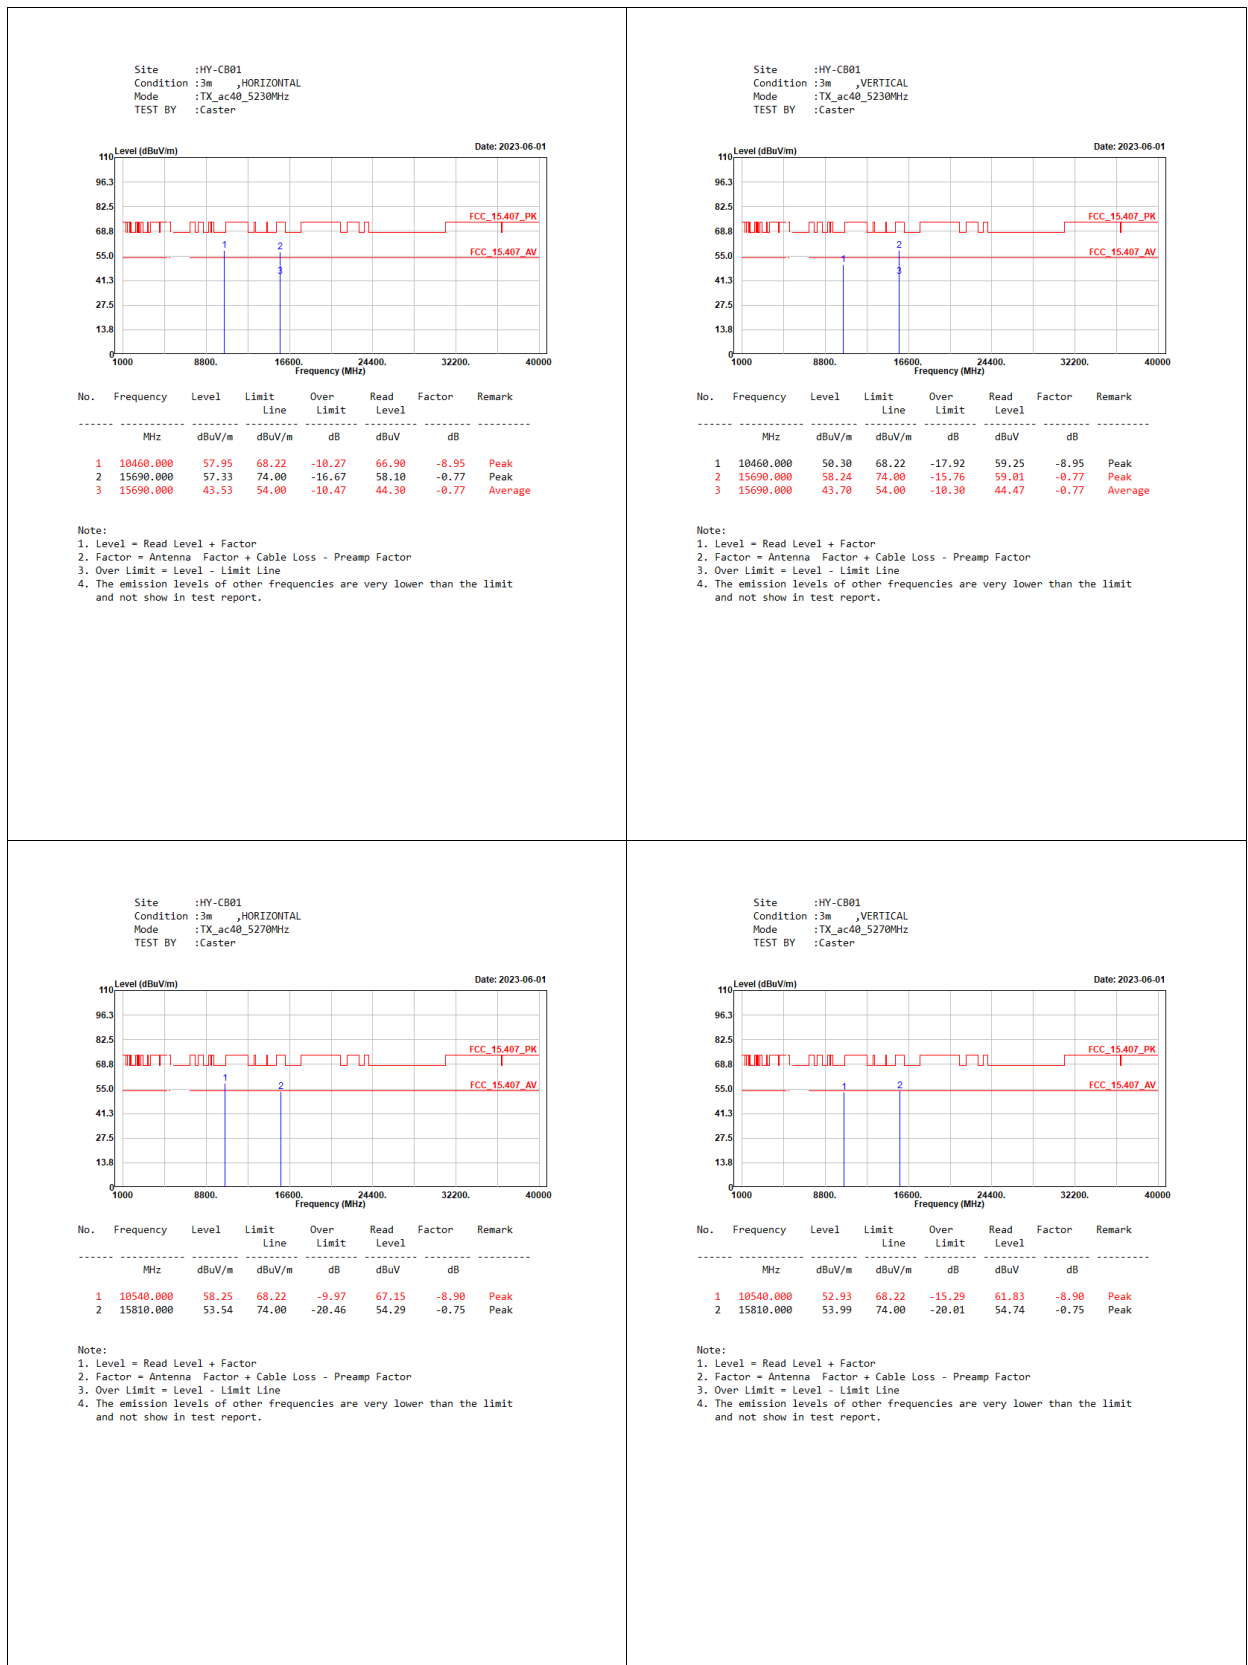

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac40_5310MHz
TEST BY :Caster

Date: 2023-06-01

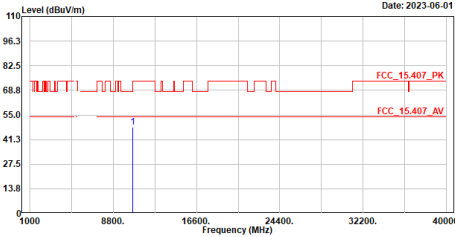


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	10620.000	48.29	74.00	-25.71	57.19	-8.90	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac40_5310MHz
TEST BY :Caster

Date: 2023-06-01

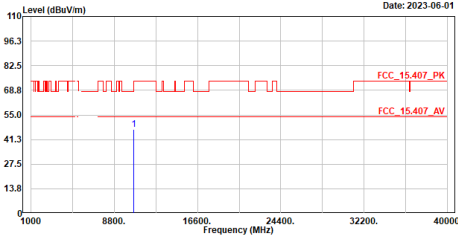


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	10620.000	46.71	74.00	-27.29	55.61	-8.90	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac40_5510MHz
TEST BY :Caster

Date: 2023-06-01

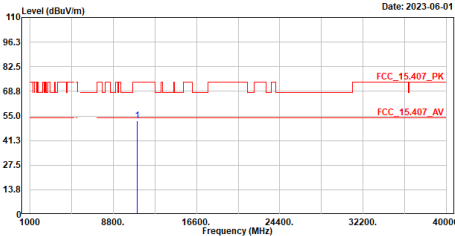


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	11020.000	52.12	74.00	-21.88	60.69	-8.57	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac40_5510MHz
TEST BY :Caster

Date: 2023-06-01

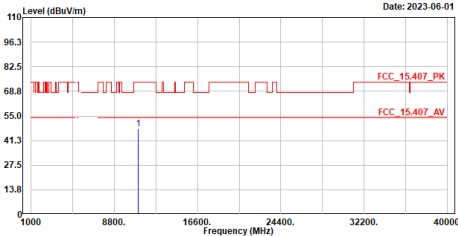


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	11020.000	47.78	74.00	-26.22	56.35	-8.57	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac40_5550MHz
TEST BY :Caster

Date: 2023-06-01

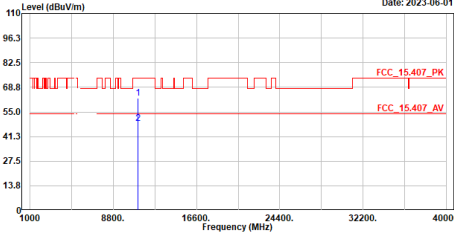


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11100.000	62.67	74.00	-11.33	70.87	-8.20	Peak
2	11100.000	48.41	54.00	-5.59	56.61	-8.20	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac40_5550MHz
TEST BY :Caster

Date: 2023-06-02

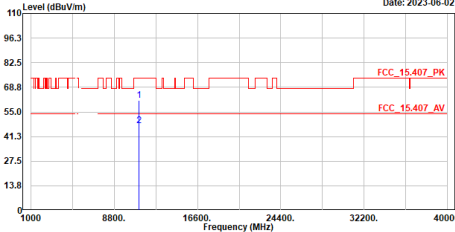


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11100.000	61.56	74.00	-12.44	69.76	-8.20	Peak
2	11100.000	47.16	54.00	-6.84	55.36	-8.20	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac40_5670MHz
TEST BY :Caster

Date: 2023-06-02

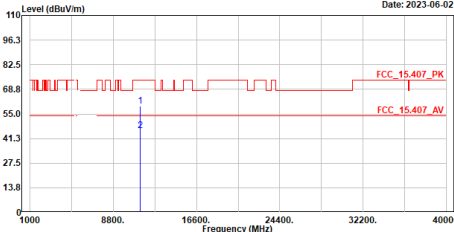


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11340.000	59.56	74.00	-14.44	67.09	-7.53	Peak
2	11340.000	45.84	54.00	-8.16	53.37	-7.53	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac40_5670MHz
TEST BY :Caster

Date: 2023-06-02

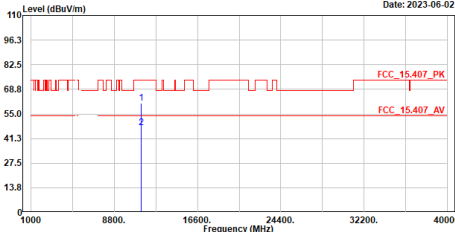


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11340.000	61.12	74.00	-12.88	68.65	-7.53	Peak
2	11340.000	47.33	54.00	-6.67	54.86	-7.53	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac40_5755MHz
TEST BY :Caster

Date: 2023-06-02

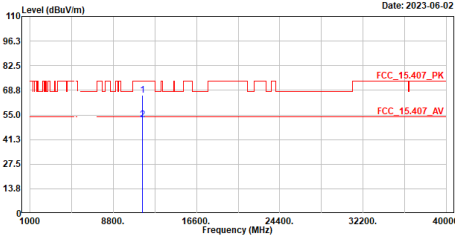


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11510.000	66.13	74.00	-7.87	73.38	-7.25	Peak
2	11510.000	52.20	54.00	-1.80	59.45	-7.25	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac40_5755MHz
TEST BY :Caster

Date: 2023-06-02

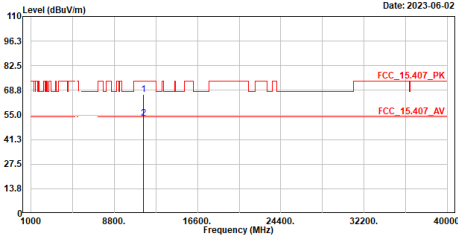


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11510.000	66.49	74.00	-7.51	73.74	-7.25	Peak
2	11510.000	53.19	54.00	-0.81	60.44	-7.25	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac40_5795MHz
TEST BY :Caster

Date: 2023-06-02

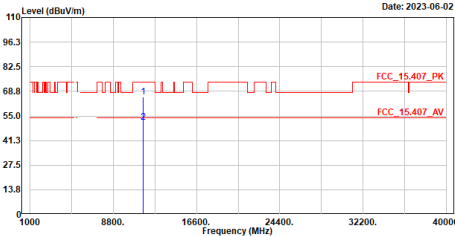


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11590.000	65.46	74.00	-8.54	72.78	-7.32	Peak
2	11590.000	51.59	54.00	-2.41	58.91	-7.32	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac40_5795MHz
TEST BY :Caster


Date: 2023-06-02

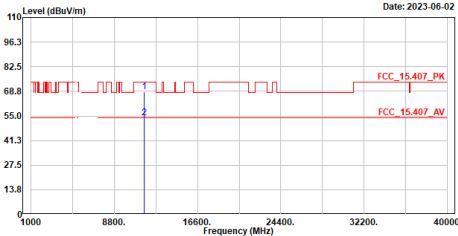

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11590.000	68.64	74.00	-5.36	75.96	-7.32	Peak
2	11590.000	53.86	54.00	-0.14	61.18	-7.32	Average


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

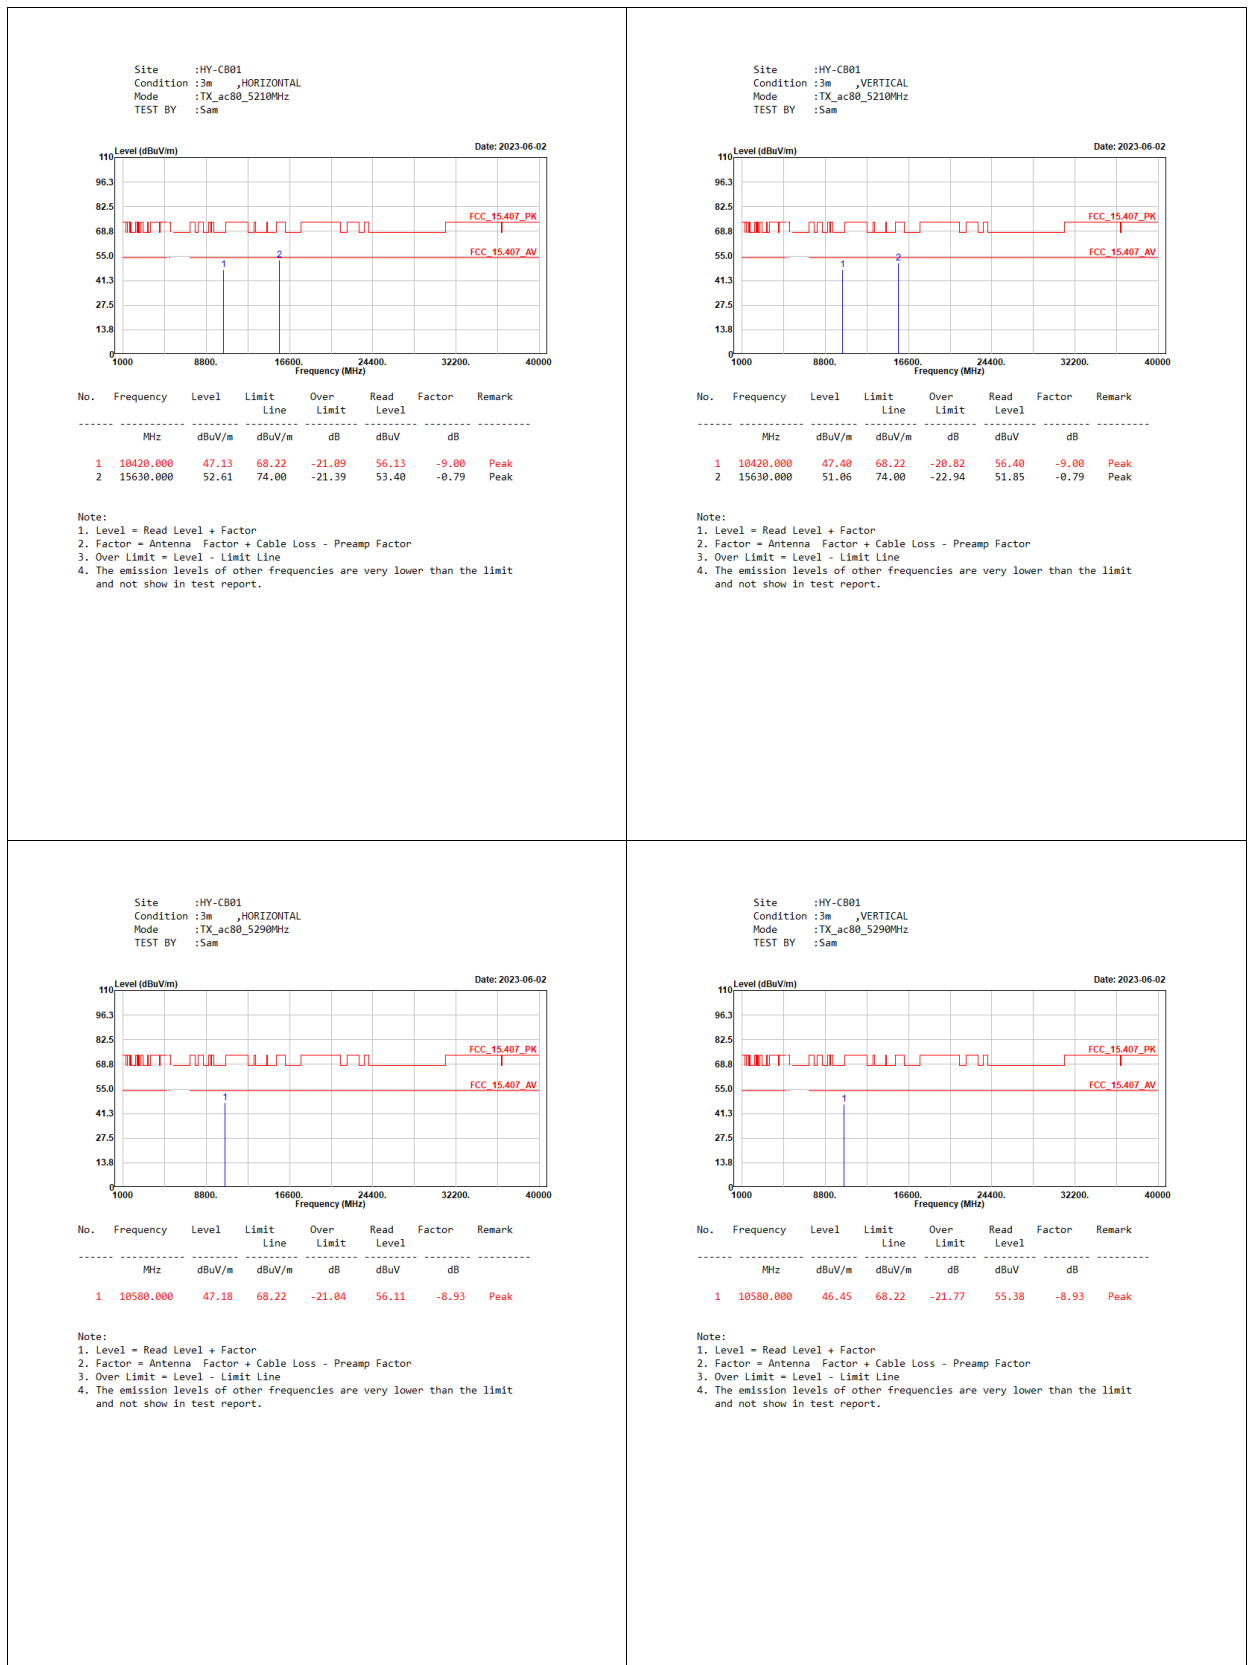

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac80_5530MHz
TEST BY :Sam

Date: 2023-06-02

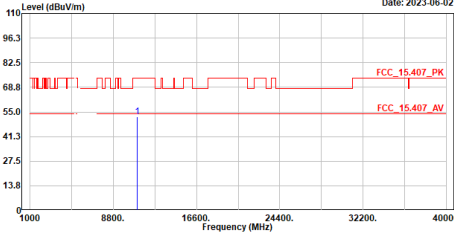


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	11060.000	52.36	74.00	-21.64	60.78	-8.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac80_5530MHz
TEST BY :Sam

Date: 2023-06-02

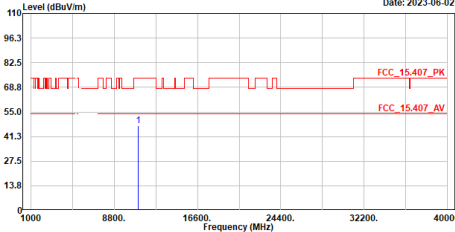


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	11060.000	47.46	74.00	-26.54	55.88	-8.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac80_5610MHz
TEST BY :Sam

Date: 2023-06-02

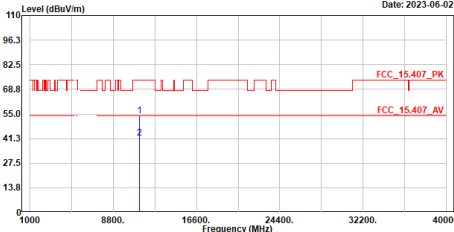


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	11220.000	54.02	74.00	-19.98	61.75	-7.73	Peak
2	11220.000	41.45	54.00	-12.55	49.18	-7.73	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac80_5610MHz
TEST BY :Sam

Date: 2023-06-02

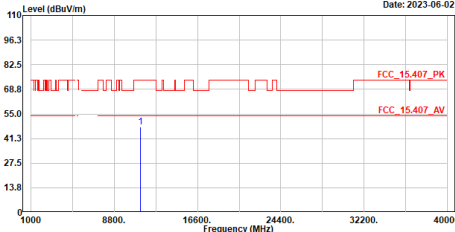


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	11220.000	47.67	74.00	-26.33	55.40	-7.73	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac80_5775MHz
TEST BY :Sam

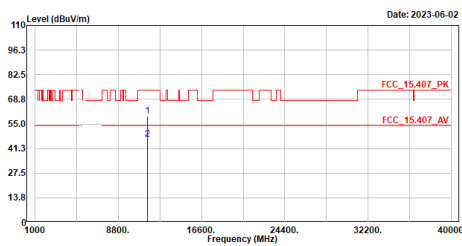

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	11550.000	59.31	74.00	-14.69	66.56	-7.25	Peak
2	11550.000	46.42	54.00	-7.58	53.67	-7.25	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac80_5775MHz
TEST BY :Sam

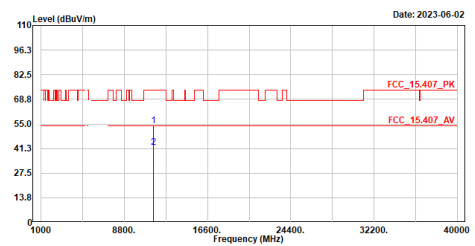

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	11550.000	54.02	74.00	-19.98	61.25	-7.23	Peak
2	11550.000	42.06	54.00	-11.94	49.31	-7.25	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac80_5775MHz
TEST BY :Caster

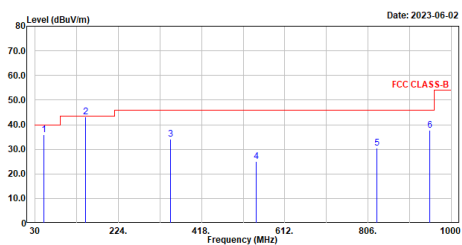

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	50.370	35.98	40.00	-4.02	59.66	-23.68	QP
2	148.340	43.13	43.50	-0.37	67.03	-23.90	QP
3	346.220	34.23	46.00	-11.77	56.37	-22.14	QP
4	545.070	24.91	46.00	-21.09	42.35	-17.44	QP
5	826.370	30.47	46.00	-15.53	43.33	-12.86	QP
6	950.530	37.72	46.00	-8.28	49.10	-11.38	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac80_5775MHz
TEST BY :Caster

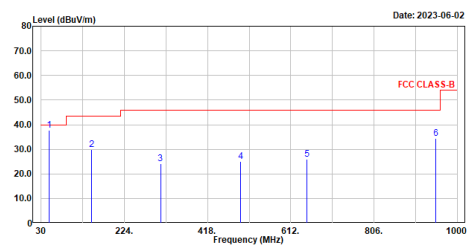


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	49.400	37.81	40.00	-2.19	61.50	-23.69	QP
2	148.340	29.79	43.50	-13.71	53.69	-23.90	QP
3	308.390	24.19	46.00	-21.81	47.23	-23.04	QP
4	495.600	25.20	46.00	-20.80	43.57	-18.37	QP
5	649.830	25.91	46.00	-20.09	41.03	-15.12	QP
6	950.530	34.45	46.00	-11.55	45.83	-11.38	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


4. Band Edge

4.1. Test Setup

RF Conducted Measurement:

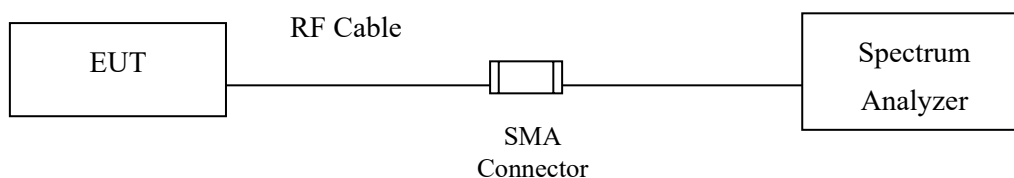

RF Radiated Measurement:

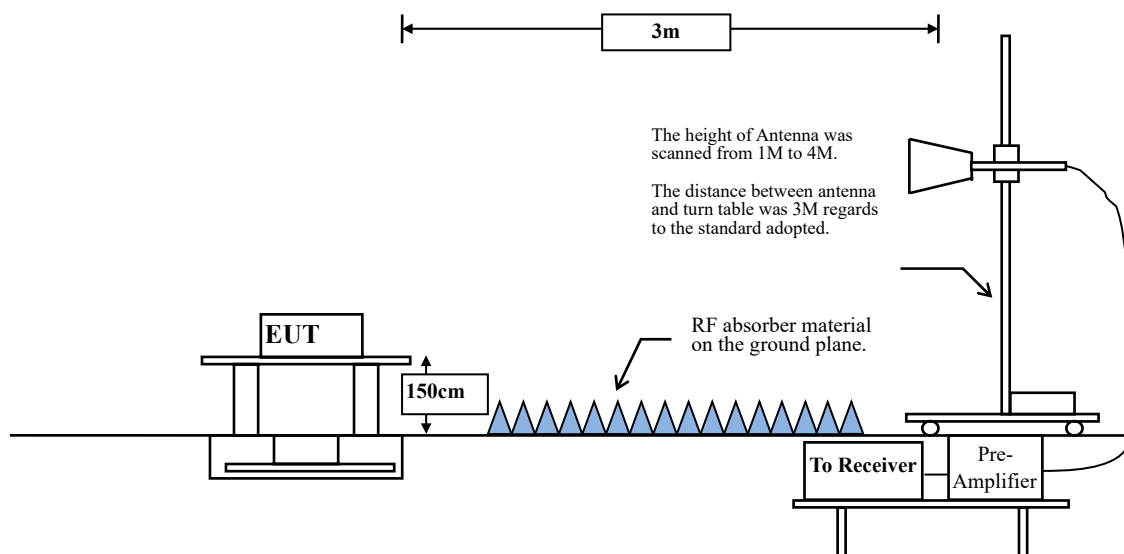

4.2. Limits

The provisions of Section 15.205 of this part apply to intentional radiators operating under this section. Radiated emissions which fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209:

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	uV/m @3m	dBμV/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

- Remarks :
1. RF Voltage (dBμV) = 20 log RF Voltage (uV)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
 - For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
 - For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
 - For transmitters operating in the 5.725-5.85 GHz band:
All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
 - For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

Based on ANSI C63.10-2013 Section 12.7.3 d) provides the conversion formula between field strength and EIRP, if distance is 3m, -27dBm is equivalent to 68.22dBuV/m.

4.3. Test Procedure

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10:2013 on radiated measurement.

The bandwidth below 1 GHz setting on the field strength meter is 120 kHz, above 1 GHz are 1 MHz.

The EUT was setup to ANSI C63.10, 2013; tested to UNII test procedure of FCC KDB-789033 for compliance to FCC 47CFR Subpart E requirements.

RBW and VBW Parameter setting:

According to KDB 789033 section II.G.5 Procedure for Unwanted Maximum Emissions Measurements above 1000 MHz.

RBW = 1 MHz.

VBW $\geq$ 3 MHz.

According to KDB 789033 section II.G.6 Procedures for Average Unwanted Emissions Measurements above 1000 MHz.

RBW = 1 MHz.

VBW = 10 Hz, when duty cycle $\geq$ 98 %


VBW $\geq$ 1/T, when duty cycle < 98 %

(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)


5 GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
802.11 a	98.35	1.4280	700	10
802.11 n20	95.56	2.5800	388	500
802.11 n40	92.11	1.2600	794	1000
802.11 ac20	95.57	2.5900	386	500
802.11 ac40	96.59	1.2750	784	1000
802.11 ac80	93.55	0.6090	1642	2000

Note: Duty Cycle Refer to Section 5.

4.4. Test Result of Band Edge

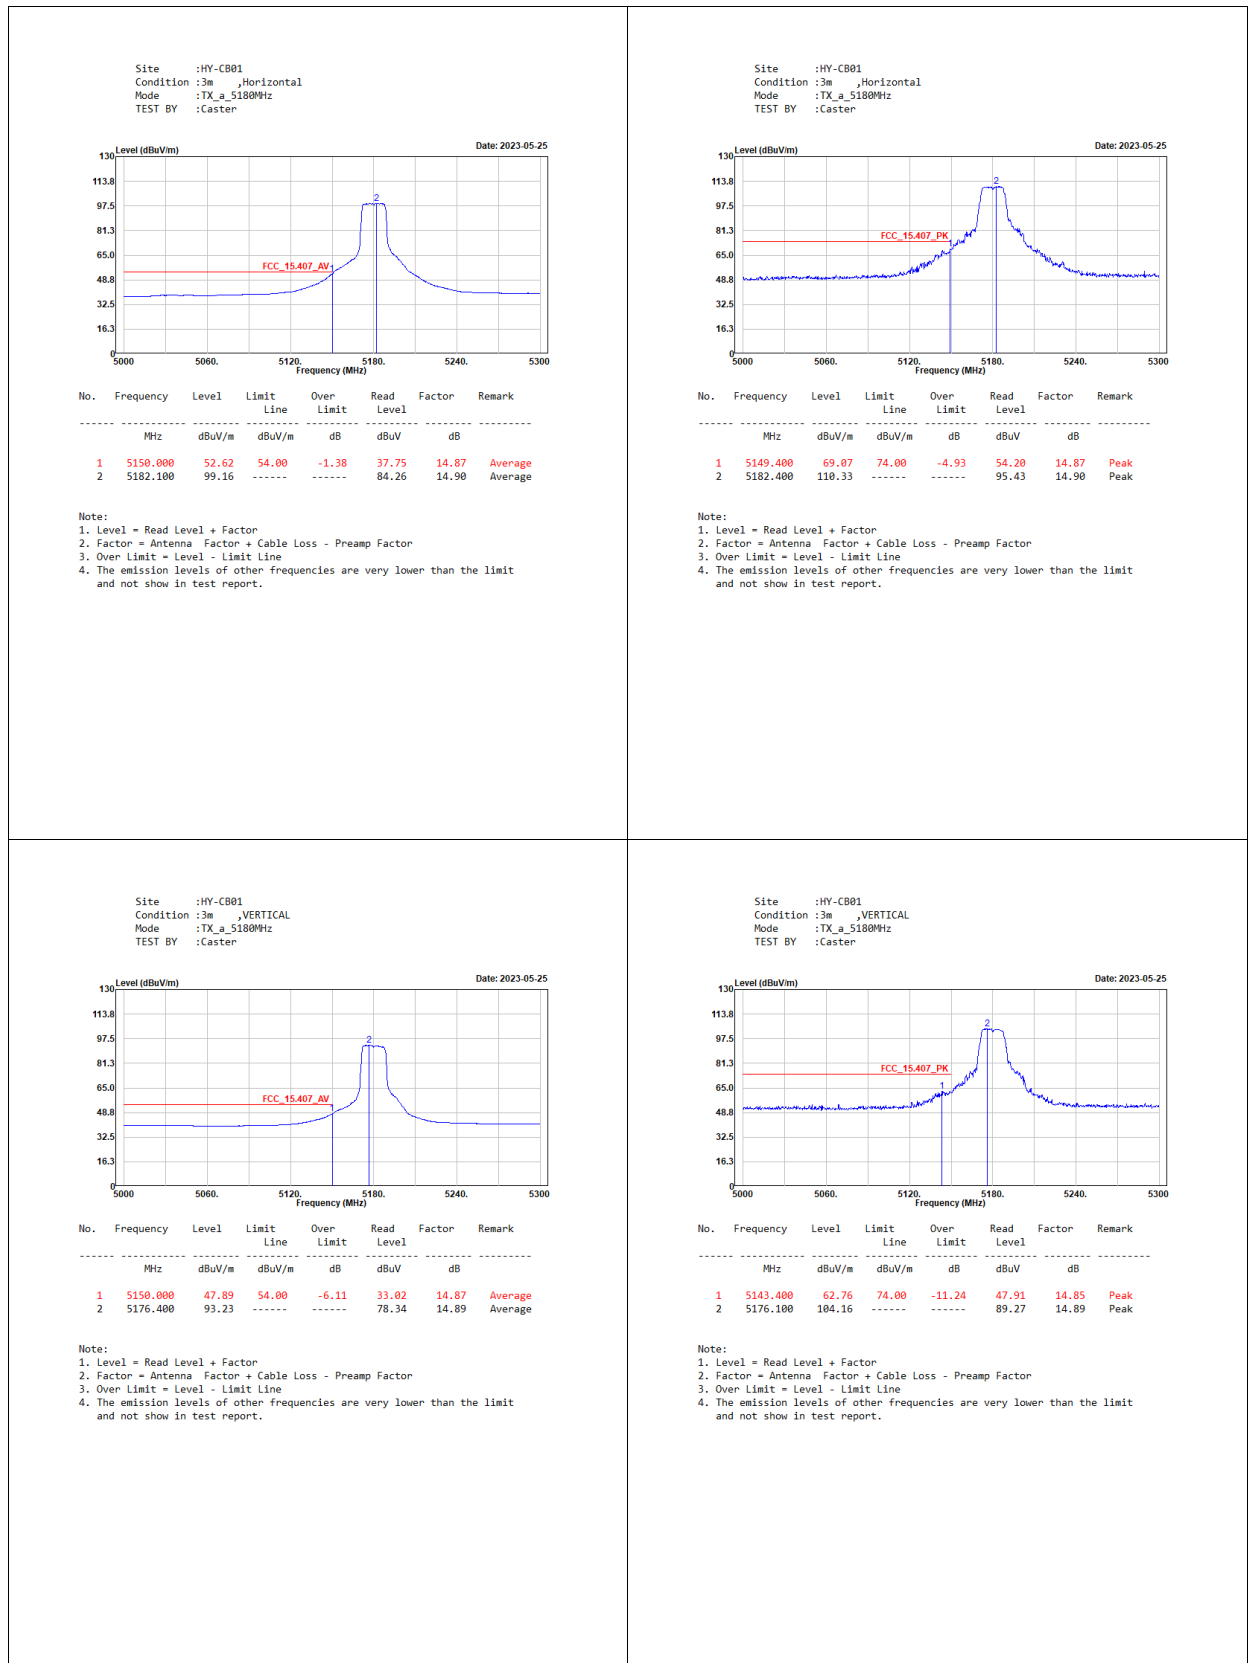

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_a_5320MHz
TEST BY :Caster

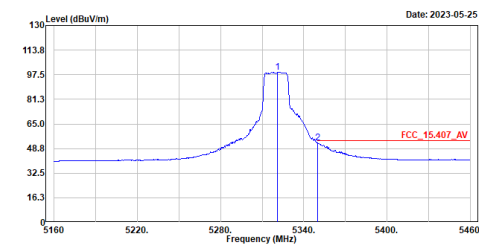


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5321.100	99.32	-----	-----	84.31	15.01	Average
2	5350.200	52.27	54.00	-1.73	37.28	14.99	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_a_5320MHz
TEST BY :Caster

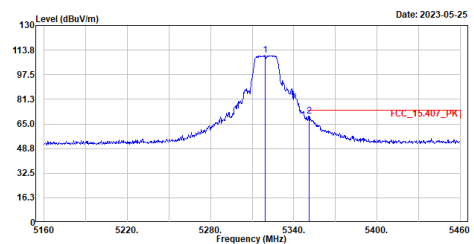


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5319.600	110.21	-----	-----	95.20	15.01	Peak
2	5351.100	70.28	74.00	-3.72	55.29	14.99	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_a_5320MHz
TEST BY :Caster

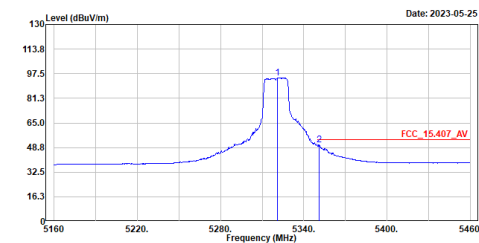


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5321.100	94.79	-----	-----	79.78	15.01	Average
2	5351.100	50.38	54.00	-3.62	35.39	14.99	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_a_5320MHz
TEST BY :Caster

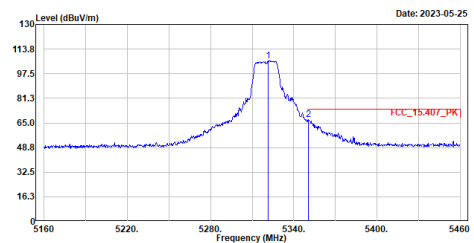


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5321.400	105.92	-----	-----	90.91	15.01	Peak
2	5350.800	67.25	74.00	-6.75	52.26	14.99	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_a_5500MHz
TEST BY :Caster

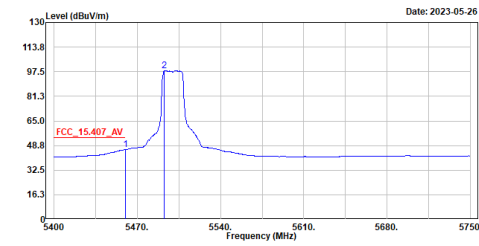


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5459.850	46.04	54.00	-7.96	30.87	15.17	Average
2	5492.750	98.15	-----	-----	82.78	15.37	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_a_5500MHz
TEST BY :Caster

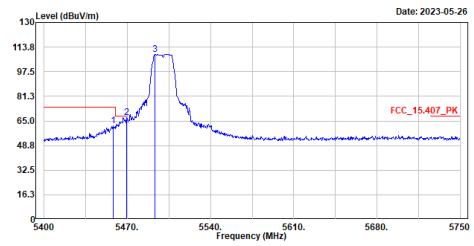


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5458.450	61.98	74.00	-12.02	46.83	15.15	Peak
2	5469.650	67.33	68.22	-0.89	52.11	15.22	Peak
3	5493.100	108.99	-----	-----	93.62	15.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_a_5500MHz
TEST BY :Caster

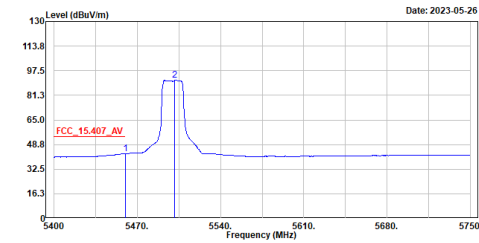


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5459.850	42.63	54.00	-11.37	27.46	15.17	Average
2	5501.500	91.25	-----	-----	75.83	15.42	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_a_5500MHz
TEST BY :Caster

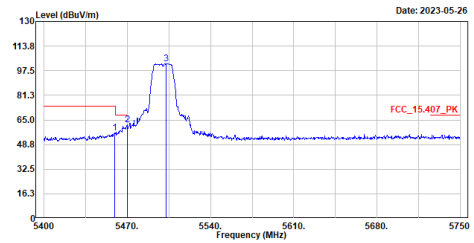


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5459.150	56.21	74.00	-17.79	41.05	15.16	Peak
2	5470.000	61.63	68.22	-6.59	46.41	15.22	Peak
3	5502.900	102.12	-----	-----	86.69	15.43	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

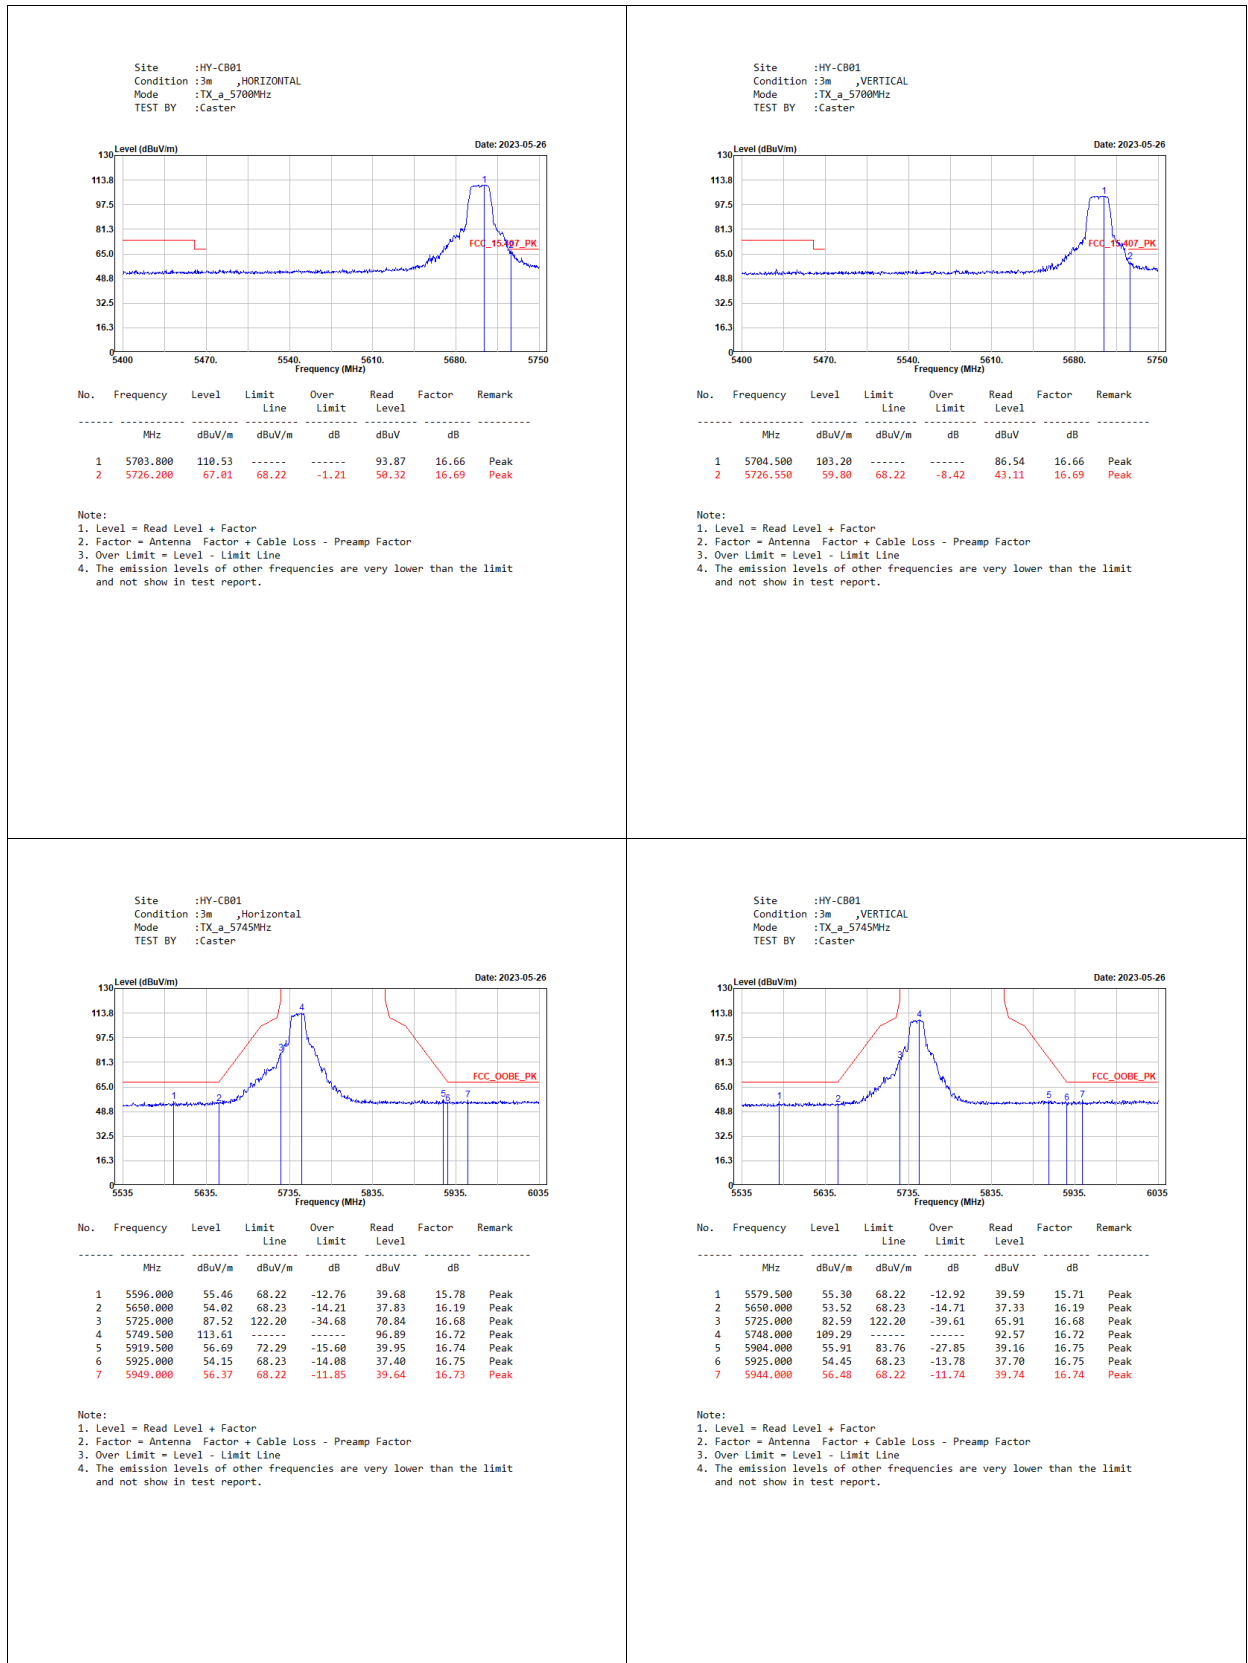

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_a_5825MHz
TEST BY :Caster

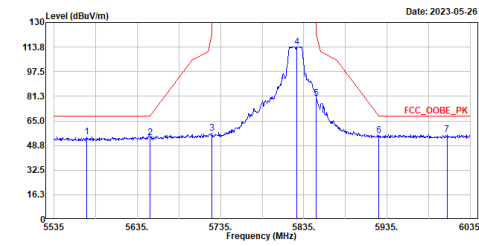


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5574.000	54.54	68.22	-13.68	38.86	15.68	Peak
2	5650.000	53.87	68.23	-14.36	37.68	16.19	Peak
3	5725.000	56.85	122.20	-65.35	40.17	16.68	Peak
4	5826.500	114.05	-----	-----	97.29	16.76	Peak
5	5850.000	80.18	122.20	-42.02	63.41	16.77	Peak
6	5925.000	55.26	68.23	-12.97	38.51	16.75	Peak
7	6007.000	56.03	68.22	-12.19	39.39	16.64	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_a_5825MHz
TEST BY :Caster

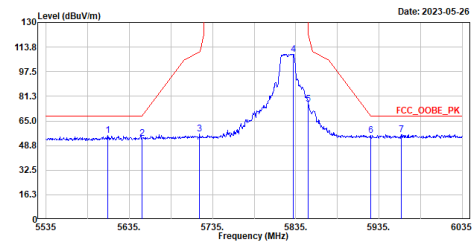


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5609.500	55.20	68.22	-13.02	39.32	15.88	Peak
2	5650.000	53.64	68.23	-14.59	37.45	16.19	Peak
3	5719.500	56.62	110.66	-54.04	39.94	16.68	Peak
4	5832.000	109.11	-----	-----	92.35	16.76	Peak
5	5850.000	75.89	122.20	-46.31	59.12	16.77	Peak
6	5925.000	55.23	68.23	-13.00	38.48	16.75	Peak
7	5962.000	56.04	68.22	-12.18	39.34	16.70	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_n20_5180MHz
TEST BY :Caster

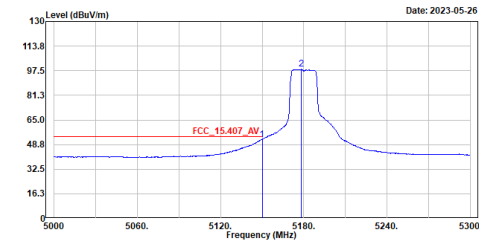


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5150.000	52.12	54.00	-1.88	37.25	14.87	Average
2	5178.200	98.38	-----	-----	83.49	14.89	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_n20_5180MHz
TEST BY :Caster

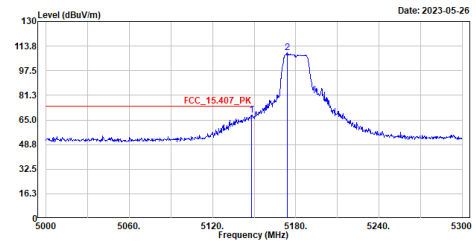


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5147.900	68.43	74.00	-5.57	53.56	14.87	Peak
2	5173.700	109.30	-----	-----	94.41	14.89	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m VERTICAL
Mode :TX_n20_5180MHz
TEST BY :Caster

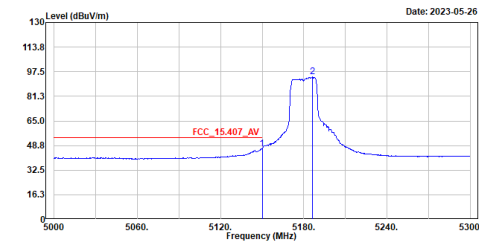


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5150.000	46.62	54.00	-7.38	31.75	14.87	Average
2	5186.300	94.00	-----	-----	79.09	14.91	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m VERTICAL
Mode :TX_n20_5180MHz
TEST BY :Caster

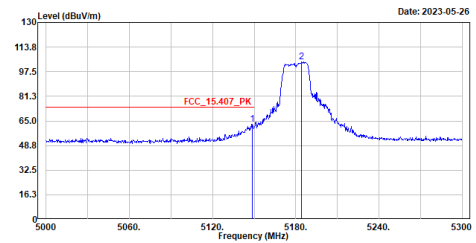


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5148.500	62.85	74.00	-11.15	47.98	14.87	Peak
2	5184.200	103.89	-----	-----	88.99	14.90	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m HORIZONTAL
Mode :TX_n20_5320MHz
TEST BY :Caster

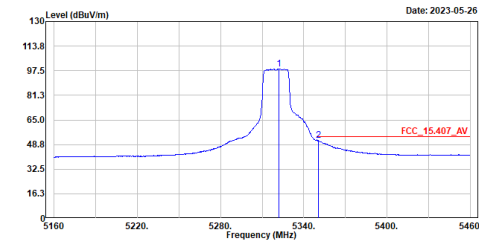


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5322.000	98.73	-----	-----	83.72	15.01	Average
2	5350.500	51.42	54.00	-2.58	36.43	14.99	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m HORIZONTAL
Mode :TX_n20_5320MHz
TEST BY :Caster

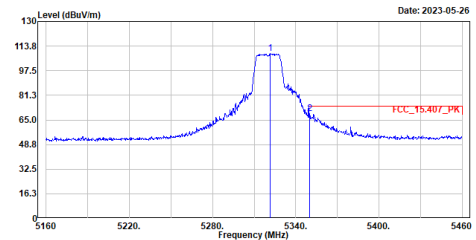


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5321.400	108.71	-----	-----	93.70	15.01	Peak
2	5350.200	69.24	74.00	-4.76	54.25	14.99	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_n20_5320MHz
TEST BY :Caster

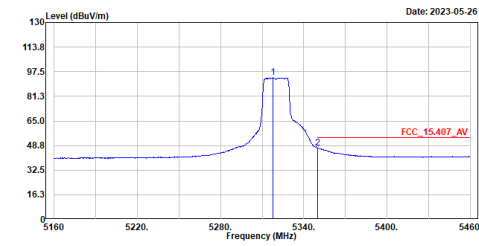


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5317.800	93.47	-----	-----	78.48	14.99	Average
2	5350.200	47.15	54.00	-6.85	32.16	14.99	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_n20_5320MHz
TEST BY :Caster

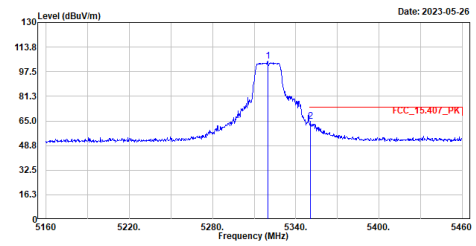


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5319.900	104.31	-----	-----	89.30	15.01	Peak
2	5350.500	64.87	74.00	-9.13	49.88	14.99	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_n20_5500MHz
TEST BY :Caster

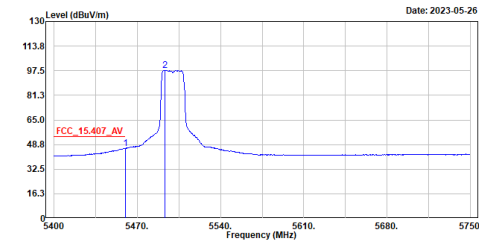


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5459.850	46.19	54.00	-7.81	31.82	15.17	Average
2	5493.100	97.83	-----	-----	82.46	15.37	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_n20_5500MHz
TEST BY :Caster

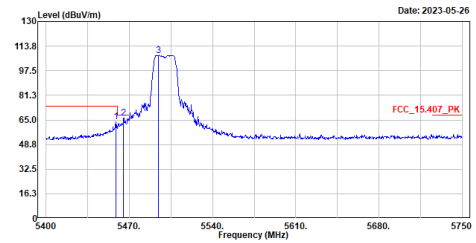

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5458.800	63.55	74.00	-10.45	48.39	15.16	Peak
2	5465.100	66.38	68.22	-1.84	51.19	15.19	Peak
3	5494.500	107.62	-----	-----	92.24	15.38	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_n20_5500MHz
TEST BY :Caster

Date: 2023-05-26

Level (dBuV/m)

Frequency (MHz)

FCC_15.407_AV

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5458.450	42.68	54.00	-11.32	27.53	15.15	Average
2	5493.100	90.52	-----	-----	75.15	15.37	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_n20_5500MHz
TEST BY :Caster

Date: 2023-05-26

Level (dBuV/m)

Frequency (MHz)

FCC_15.407_PK

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5459.500	58.18	74.00	-15.82	43.01	15.17	Peak
2	5468.250	60.40	68.22	-7.82	45.19	15.21	Peak
3	5495.200	100.60	-----	-----	85.22	15.38	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_n20_5700MHz
TEST BY :Caster

Date: 2023-05-27

Level (dBuV/m)

Frequency (MHz)

FCC_15.407_PK

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5696.100	110.02	-----	-----	93.39	16.63	Peak
2	5725.500	67.52	68.22	-0.70	50.83	16.69	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_n20_5700MHz
TEST BY :Caster

Date: 2023-05-27

Level (dBuV/m)

Frequency (MHz)

FCC_15.407_PK


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5702.750	103.65	-----	-----	86.99	16.66	Peak
2	5725.850	62.13	68.22	-6.09	45.44	16.69	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_n20_5745MHz
TEST BY :Sam

Date: 2023-05-27

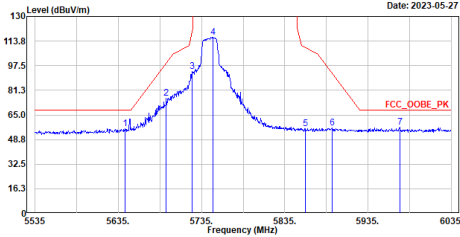


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5643.000	56.12	68.22	-12.10	39.99	16.13	Peak
2	5692.500	76.22	99.65	-23.43	59.62	16.60	Peak
3	5724.000	93.59	119.92	-26.33	76.91	16.68	Peak
4	5748.500	116.13	-----	-----	99.41	16.72	Peak
5	5859.500	56.12	109.54	-53.42	39.36	16.76	Peak
6	5892.000	56.33	92.63	-36.30	39.57	16.76	Peak
7	5973.000	56.99	68.22	-11.23	40.33	16.66	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_n20_5745MHz
TEST BY :Sam

Date: 2023-05-27

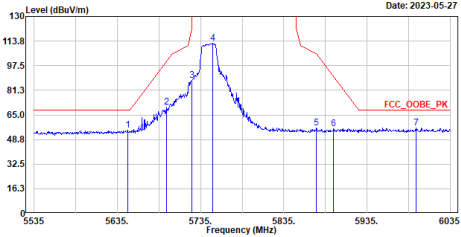


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5647.500	54.73	68.22	-13.49	38.56	16.17	Peak
2	5694.000	70.00	100.76	-30.76	53.39	16.61	Peak
3	5724.500	87.72	121.06	-33.34	71.04	16.68	Peak
4	5750.000	112.11	-----	-----	95.39	16.72	Peak
5	5874.500	56.22	105.34	-49.12	39.46	16.76	Peak
6	5895.000	56.01	90.41	-34.40	39.25	16.76	Peak
7	5994.000	56.36	68.22	-11.86	39.75	16.61	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_n20_5825MHz
TEST BY :Sam

Date: 2023-05-27

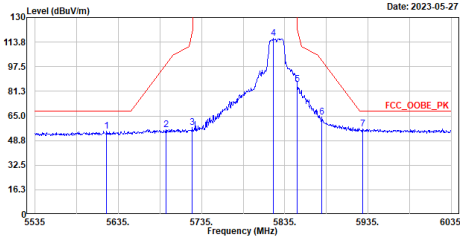


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5621.000	55.02	68.22	-13.20	39.06	15.96	Peak
2	5692.000	55.77	99.28	-43.51	39.17	16.60	Peak
3	5724.000	57.23	119.92	-62.69	40.55	16.68	Peak
4	5821.500	116.09	-----	-----	99.34	16.75	Peak
5	5850.000	85.75	122.20	-36.45	68.98	16.77	Peak
6	5879.500	64.21	101.87	-37.66	47.45	16.76	Peak
7	5929.000	56.28	68.22	-11.94	39.53	16.75	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_n20_5825MHz
TEST BY :Sam

Date: 2023-05-27

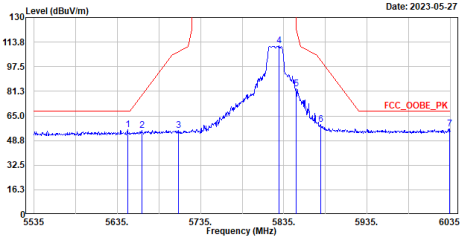


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5647.500	55.84	68.22	-12.38	39.67	16.17	Peak
2	5664.500	55.46	78.95	-23.49	39.10	16.36	Peak
3	5708.500	55.39	107.58	-52.19	38.72	16.67	Peak
4	5829.000	111.35	-----	-----	94.59	16.76	Peak
5	5850.000	82.80	122.20	-39.40	66.03	16.77	Peak
6	5879.500	59.54	101.87	-42.33	42.78	16.76	Peak
7	6034.500	56.61	68.22	-11.61	39.74	16.87	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_n40_5190MHz
TEST BY :Sam

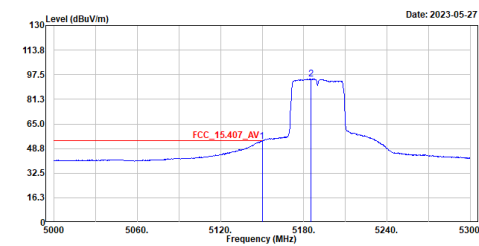


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5150.000	53.67	54.00	-0.33	38.80	14.87	Average
2	5185.100	94.69	-----	-----	79.79	14.90	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_n40_5190MHz
TEST BY :Sam

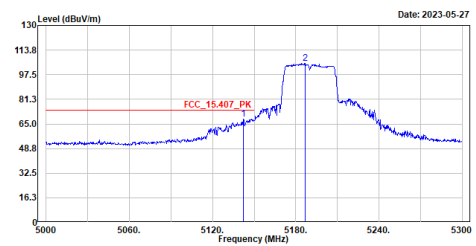


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5142.200	68.26	74.00	-5.74	53.41	14.85	Peak
2	5186.600	105.20	-----	-----	90.29	14.91	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_n40_5190MHz
TEST BY :Sam

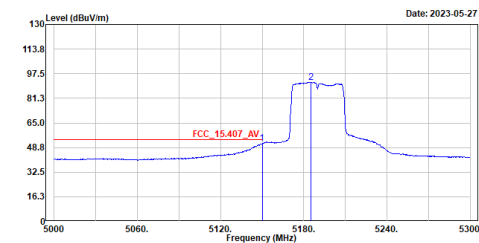


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5150.000	51.34	54.00	-2.66	36.47	14.87	Average
2	5185.400	91.91	-----	-----	77.01	14.90	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_n40_5190MHz
TEST BY :Sam

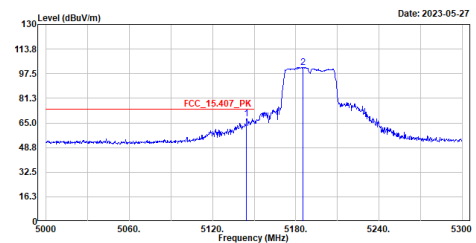



No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5144.600	67.67	74.00	-6.33	52.82	14.85	Peak
2	5185.400	101.57	-----	-----	86.67	14.90	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

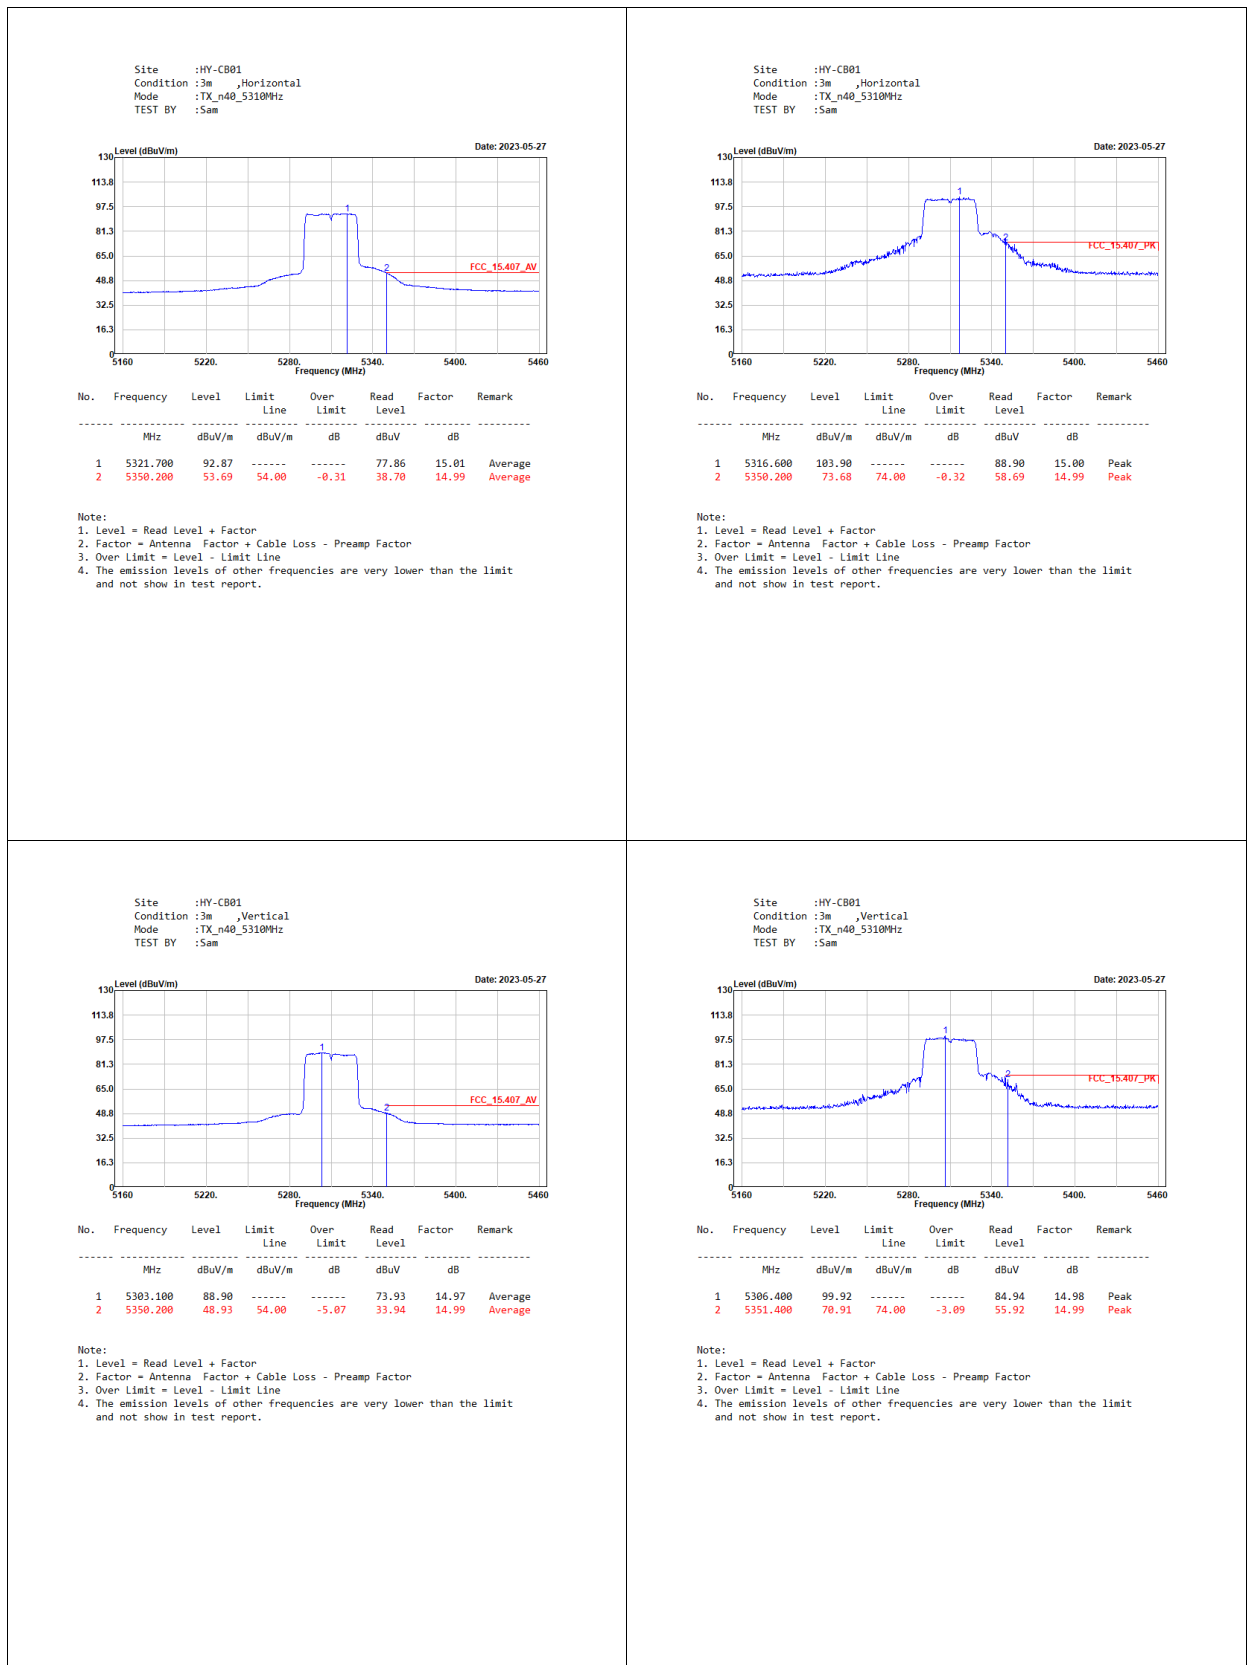

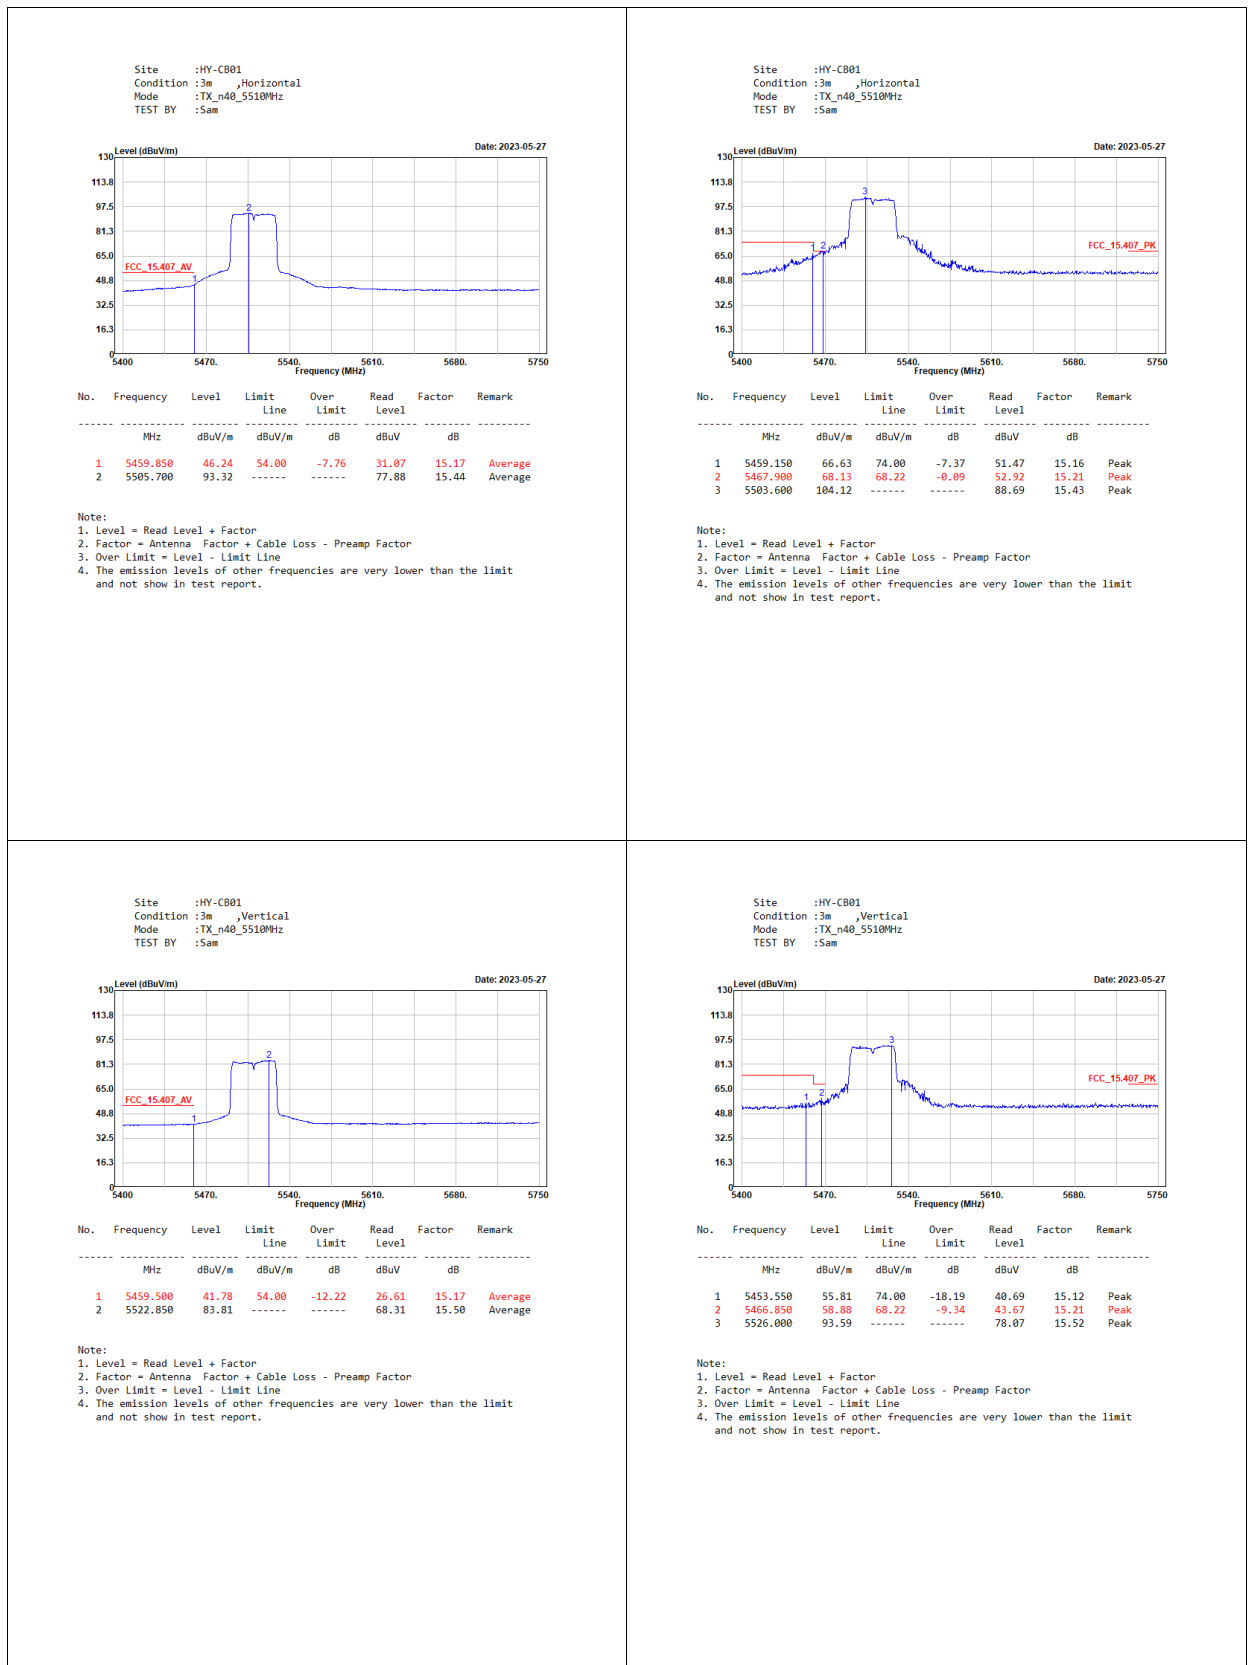

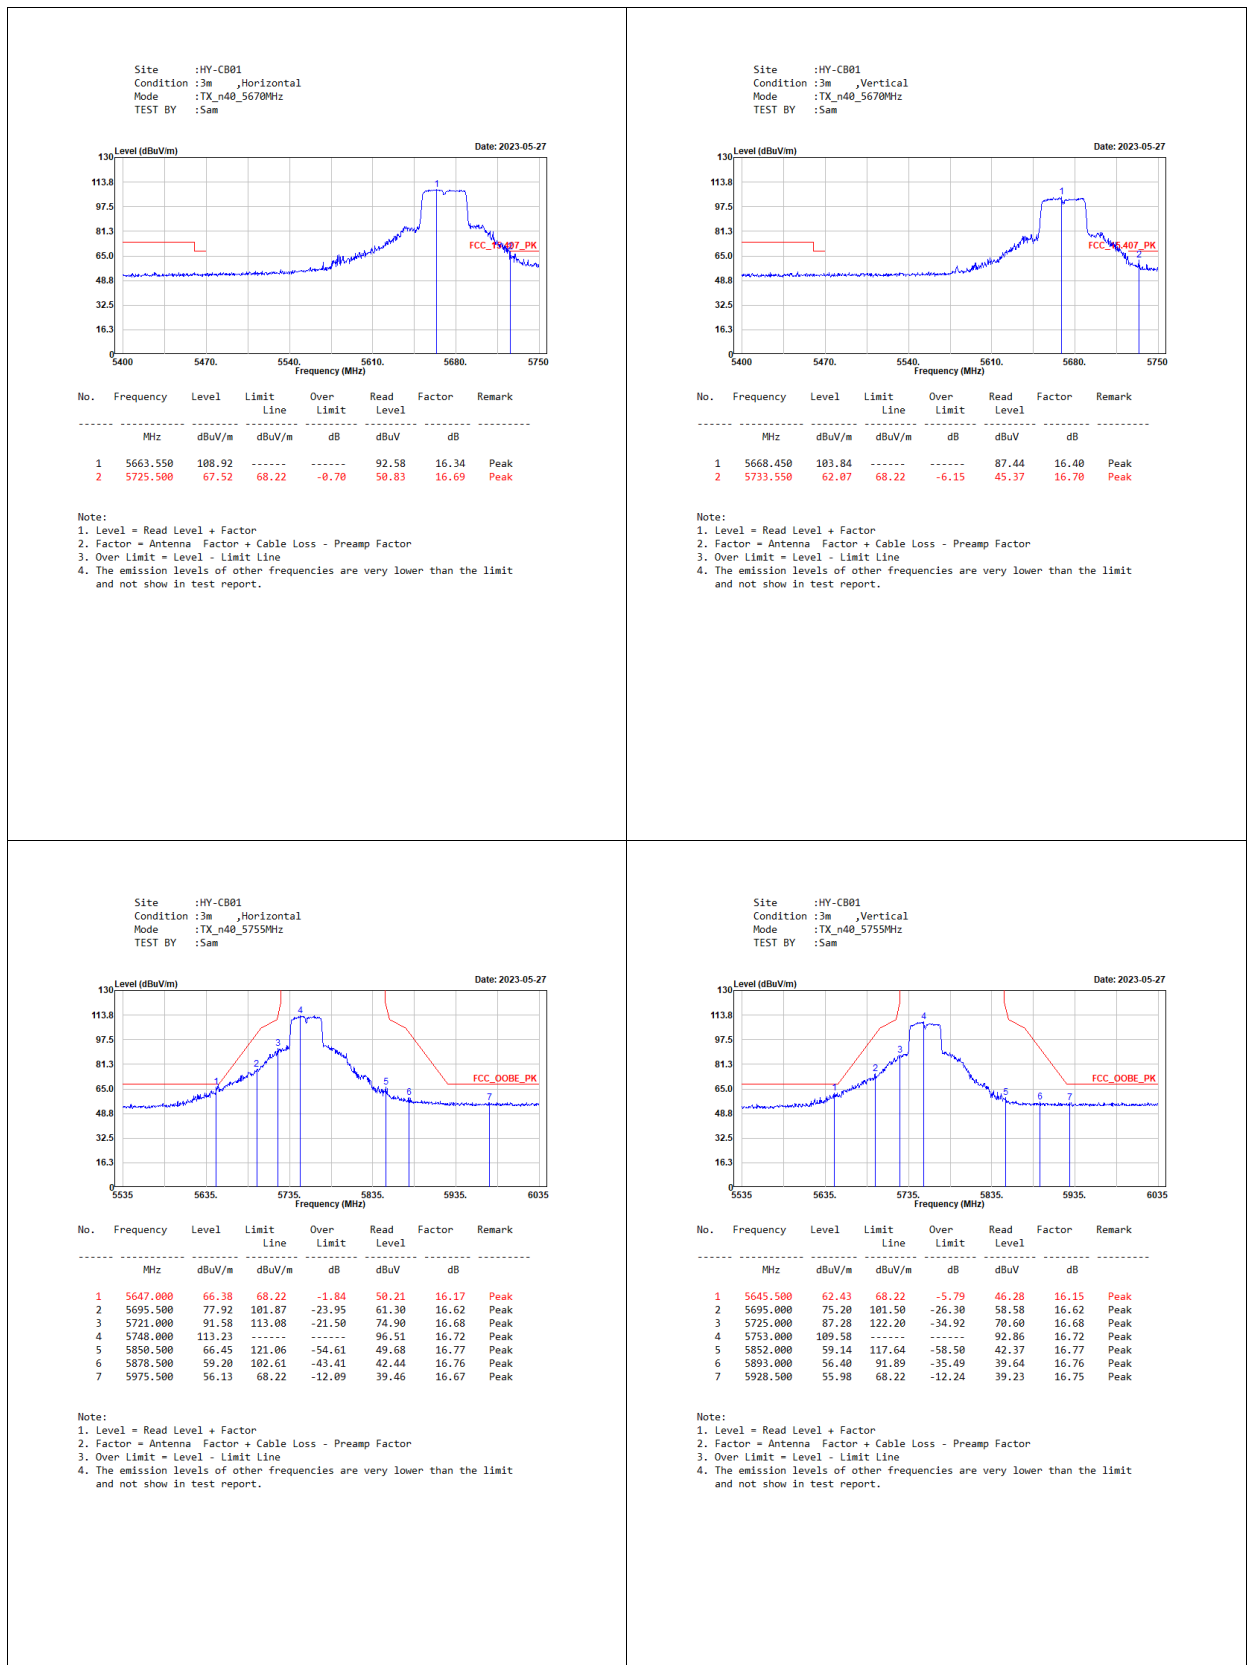

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_n40_5795MHz
TEST BY :Sam

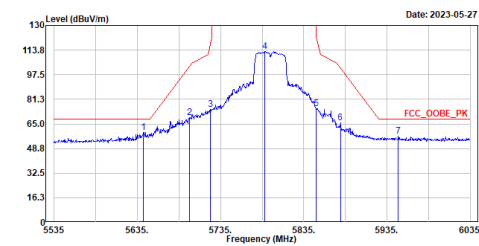


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5642.500	59.33	68.22	-8.89	43.20	16.13	Peak
2	5697.500	69.41	103.35	-33.94	52.77	16.64	Peak
3	5722.500	74.43	116.50	-42.07	57.75	16.68	Peak
4	5788.500	113.02	-----	-----	96.29	16.73	Peak
5	5850.000	75.19	122.20	-47.01	58.42	16.77	Peak
6	5879.000	65.89	102.24	-36.35	49.13	16.76	Peak
7	5948.500	56.69	68.22	-11.53	39.96	16.73	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_n40_5795MHz
TEST BY :Sam

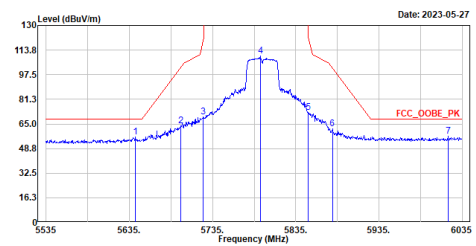


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5642.000	56.17	68.22	-12.05	40.04	16.13	Peak
2	5697.000	63.78	102.98	-39.20	47.14	16.64	Peak
3	5724.000	69.59	119.92	-50.33	52.91	16.68	Peak
4	5792.500	109.66	-----	-----	92.92	16.74	Peak
5	5850.000	72.76	122.20	-49.44	55.99	16.77	Peak
6	5879.000	61.74	102.24	-40.50	44.98	16.76	Peak
7	6018.000	56.97	68.22	-11.25	40.26	16.71	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ac20_5180MHz
TEST BY :Caster

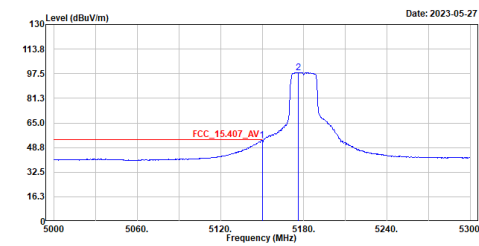


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5150.000	53.53	54.00	-0.47	38.66	14.87	Average
2	5175.000	98.20	-----	-----	83.31	14.89	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ac20_5180MHz
TEST BY :Caster

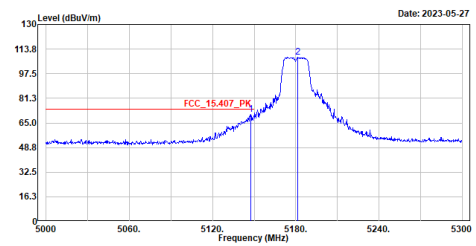


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5147.600	70.45	74.00	-3.55	55.58	14.87	Peak
2	5181.200	108.25	-----	-----	93.35	14.90	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ac20_5180MHz
TEST BY :Caster

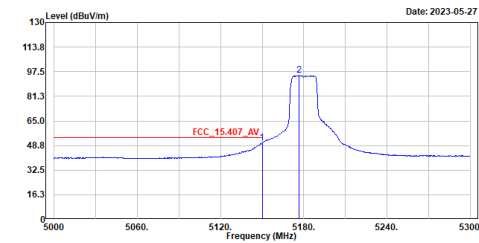


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5150.000	50.49	54.00	-3.51	35.62	14.87	Average
2	5176.700	95.03	-----	-----	80.14	14.89	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ac20_5180MHz
TEST BY :Caster

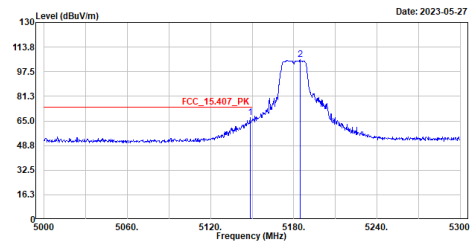


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5148.500	67.11	74.00	-6.89	52.24	14.87	Peak
2	5184.800	105.33	-----	-----	90.43	14.90	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac20_5320MHz
TEST BY :Caster

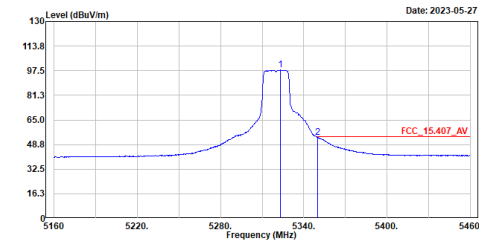


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5323.200	97.91	-----	-----	82.90	15.01	Average
2	5350.200	53.34	54.00	-0.66	38.35	14.99	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac20_5320MHz
TEST BY :Caster

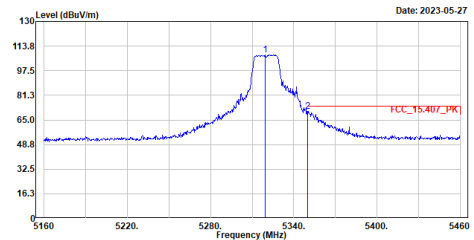


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5319.300	108.05	-----	-----	93.05	15.00	Peak
2	5350.200	70.82	74.00	-3.18	55.83	14.99	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac20_5320MHz
TEST BY :Caster

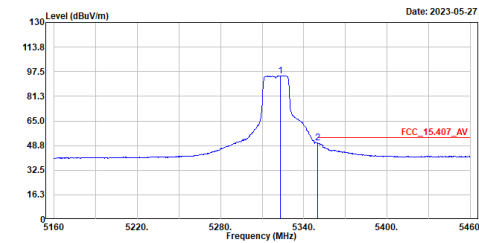


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5323.200	94.88	-----	-----	79.87	15.01	Average
2	5350.200	50.37	54.00	-3.63	35.38	14.99	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac20_5320MHz
TEST BY :Caster

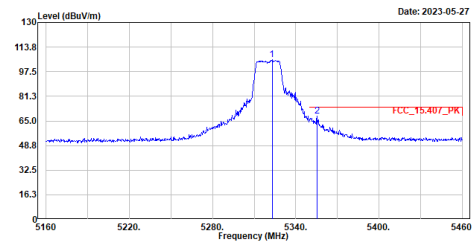


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5322.900	105.55	-----	-----	90.54	15.01	Peak
2	5355.300	68.22	74.00	-5.78	53.23	14.99	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ac20_5500MHz
TEST BY :Caster

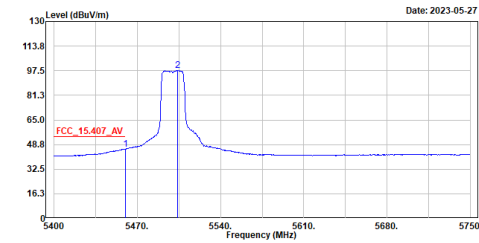


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5459.850	45.78	54.00	-8.22	30.61	15.17	Average
2	5503.950	97.54	-----	-----	82.10	15.44	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ac20_5500MHz
TEST BY :Caster

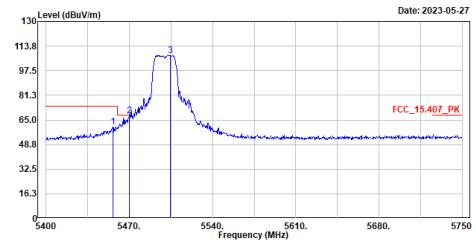


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5456.000	60.51	74.00	-13.49	45.38	15.13	Peak
2	5470.000	67.74	68.22	-0.48	52.52	15.22	Peak
3	5504.650	107.59	-----	-----	92.15	15.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac20_5500MHz
TEST BY :Caster

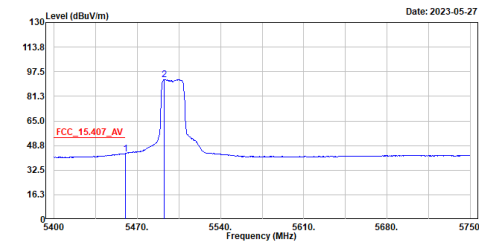

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5459.850	43.34	54.00	-10.66	28.17	15.17	Average
2	5492.400	92.34	-----	-----	76.97	15.37	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac20_5500MHz
TEST BY :Caster

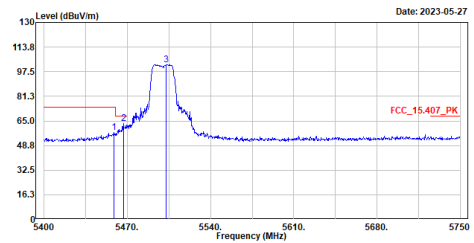

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5458.800	57.47	74.00	-16.53	42.31	15.16	Peak
2	5466.850	63.07	68.22	-5.15	47.86	15.21	Peak
3	5502.550	102.24	-----	-----	86.81	15.43	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac20_5700MHz
TEST BY :Caster

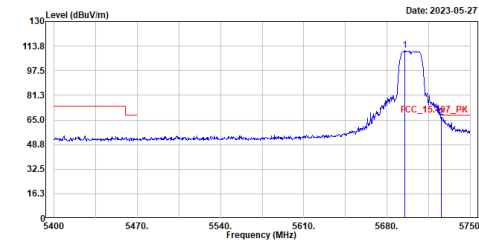

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5694.700	110.83	-----	-----	94.21	16.62	Peak
2	5725.850	66.72	68.22	-1.50	50.03	16.69	Peak


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac20_5700MHz
TEST BY :Caster

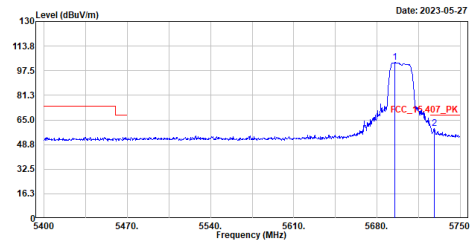


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5694.700	103.21	-----	-----	86.59	16.62	Peak
2	5727.950	59.23	68.22	-8.99	42.53	16.70	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

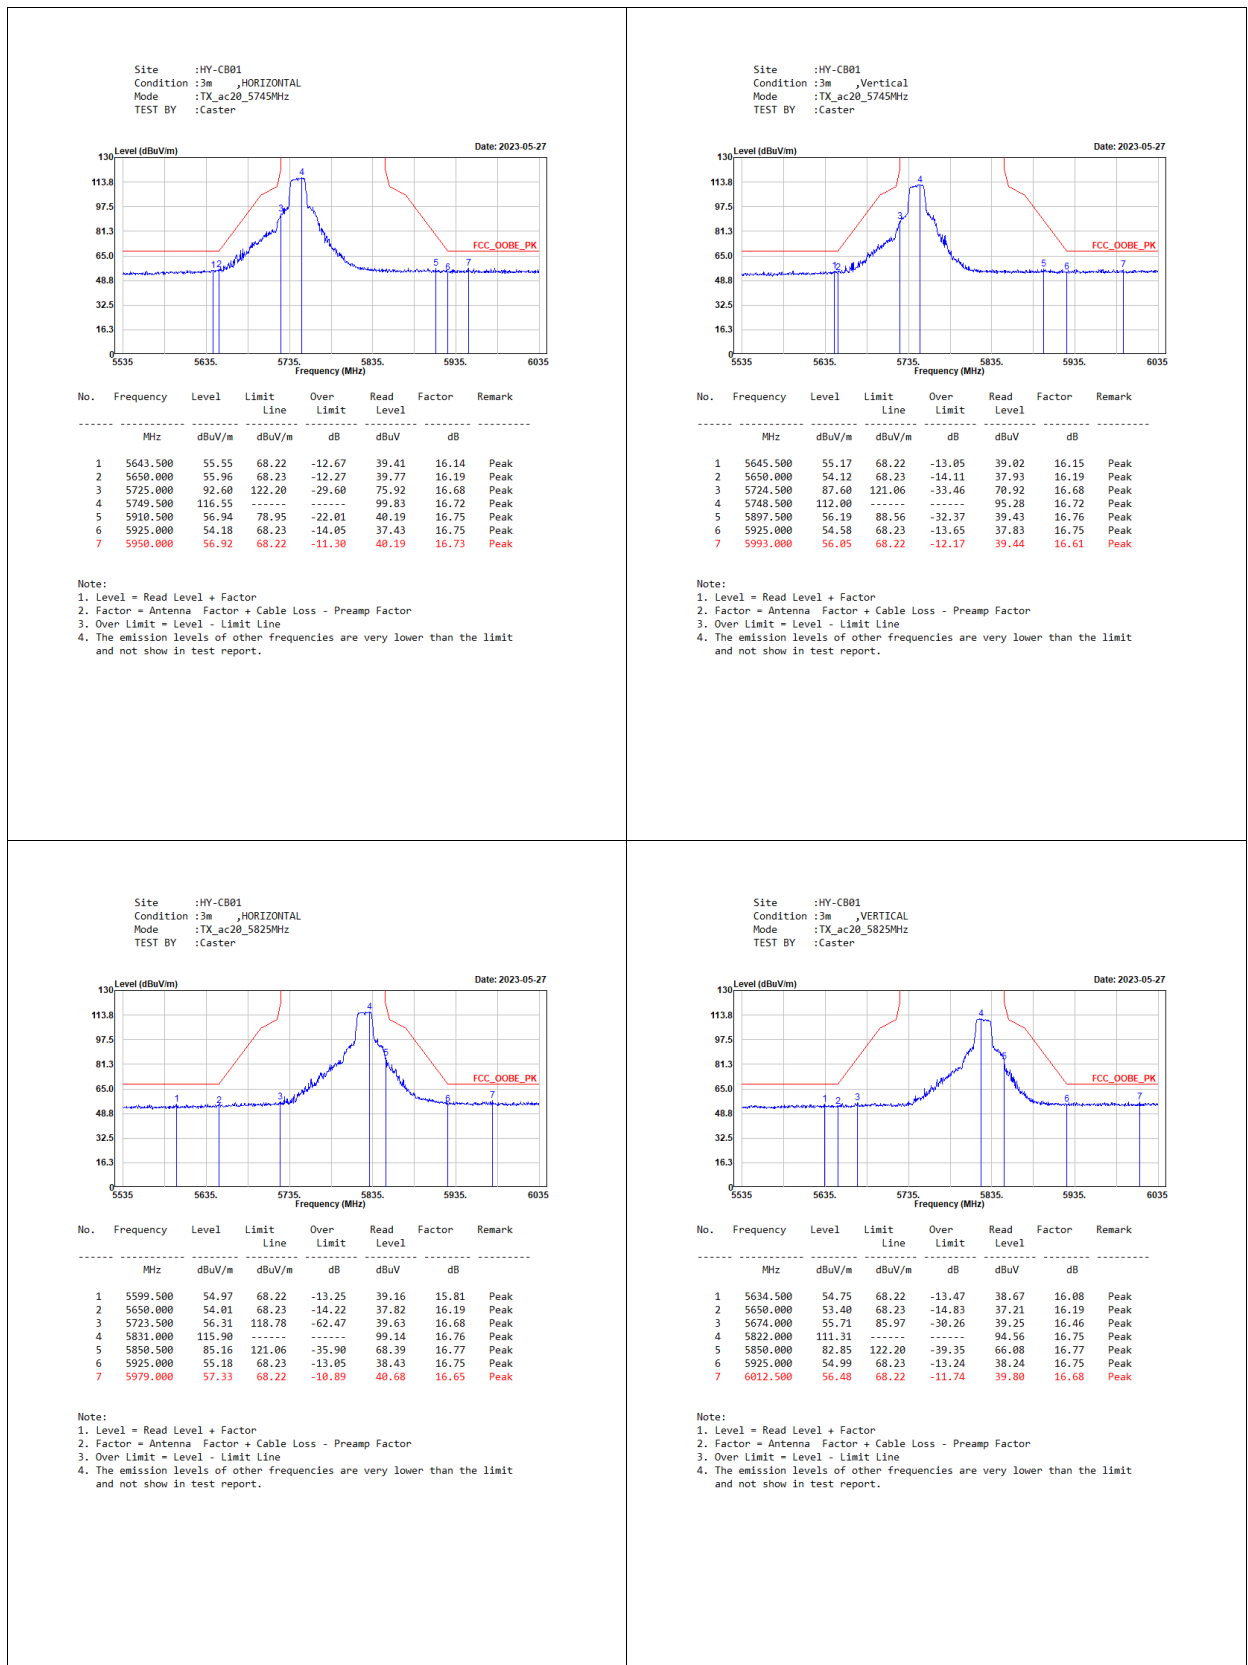


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac40_5190MHz
TEST BY :Caster

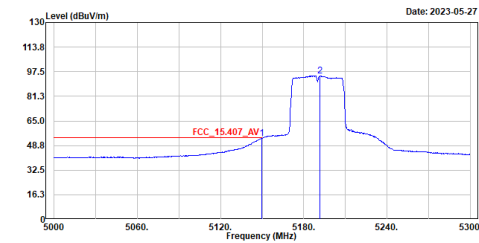

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5149.700	53.61	54.00	-0.39	38.74	14.87	Average
2	5186.000	104.80	-----	-----	79.73	14.91	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac40_5190MHz
TEST BY :Caster

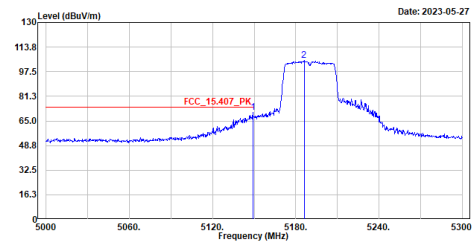

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5149.100	70.75	74.00	-3.25	55.88	14.87	Peak
2	5186.000	104.80	-----	-----	89.90	14.90	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ac40_5190MHz
TEST BY :Caster

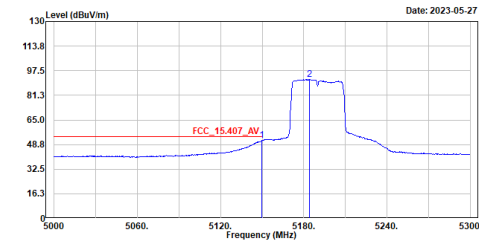

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5149.700	51.35	54.00	-2.65	36.48	14.87	Average
2	5184.200	91.70	-----	-----	76.80	14.90	Average


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ac40_5190MHz
TEST BY :Caster

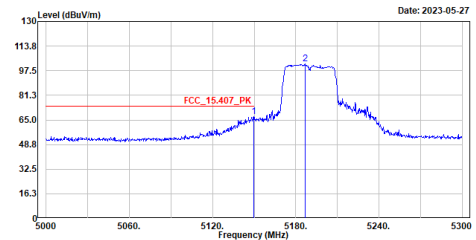


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5149.700	67.37	74.00	-6.63	52.50	14.87	Peak
2	5186.000	102.24	-----	-----	87.33	14.91	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

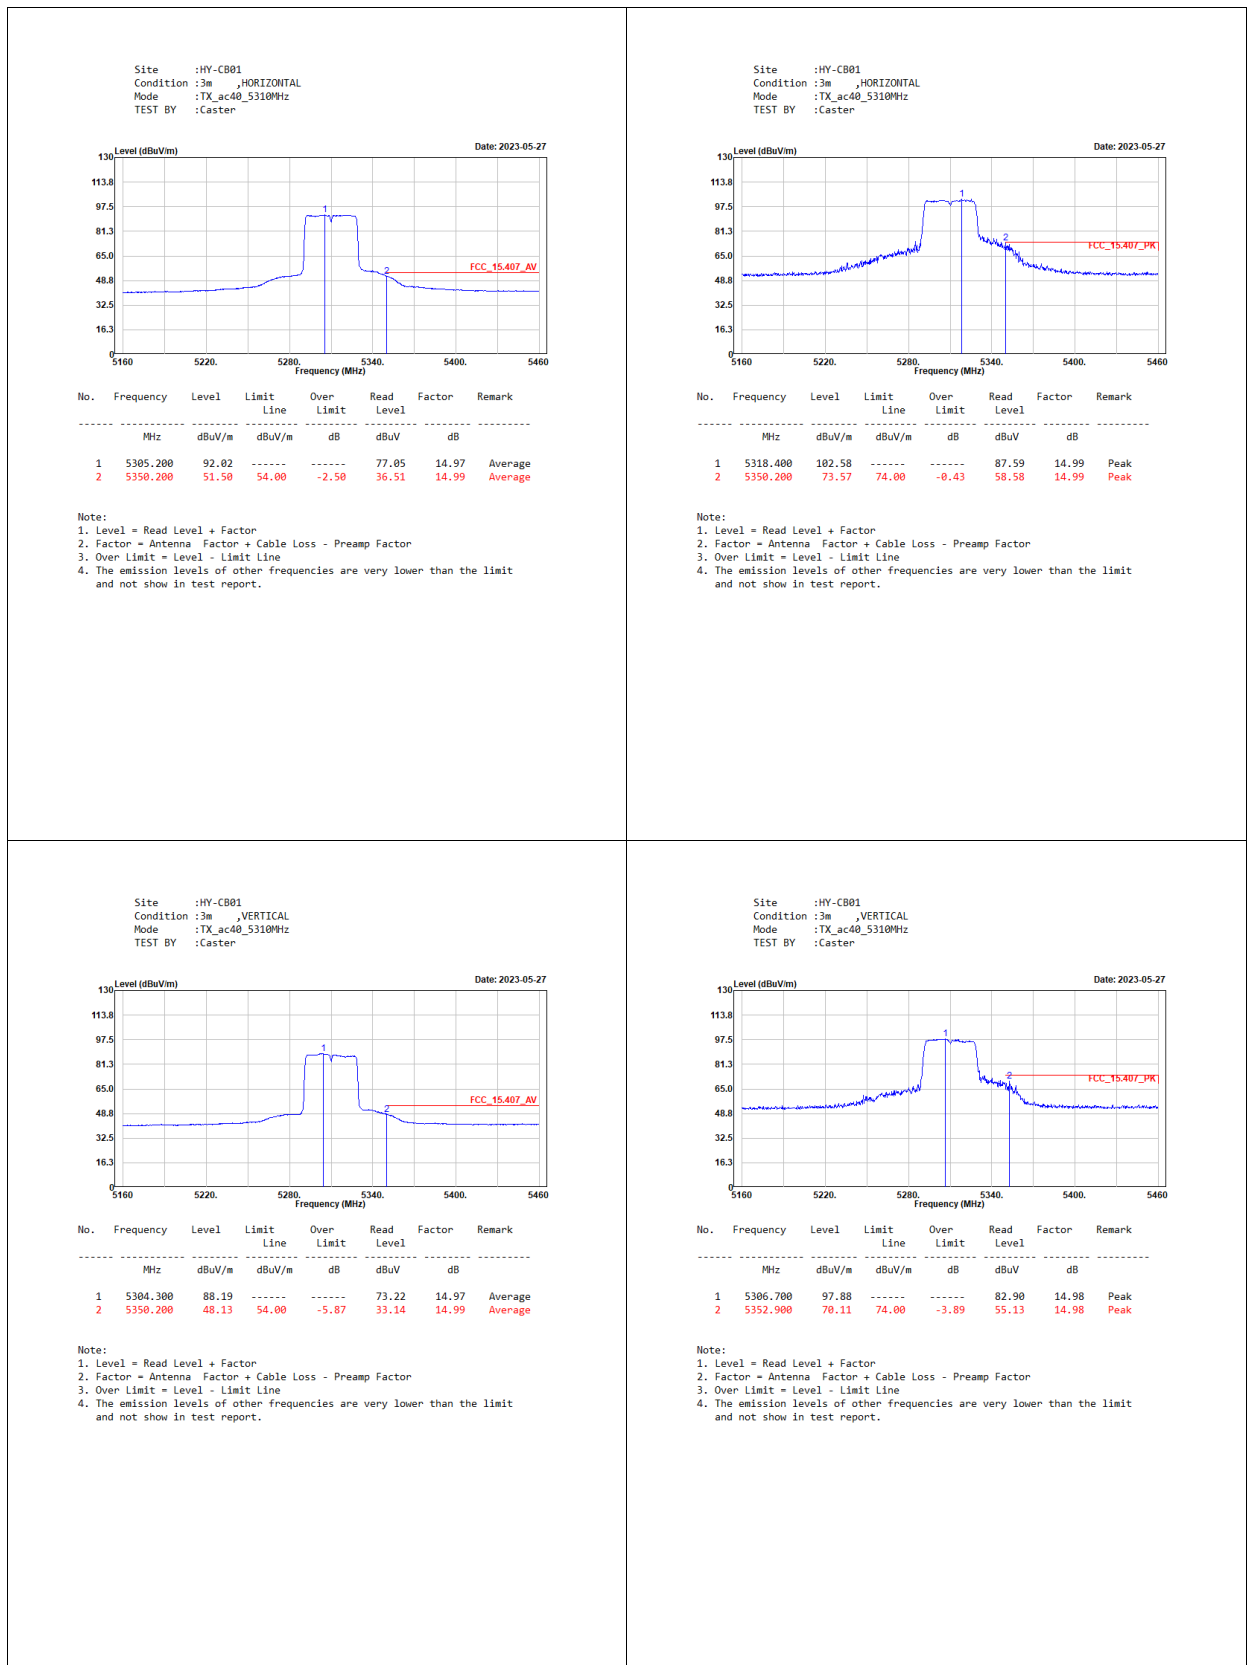


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac40_5510MHz
TEST BY :Caster

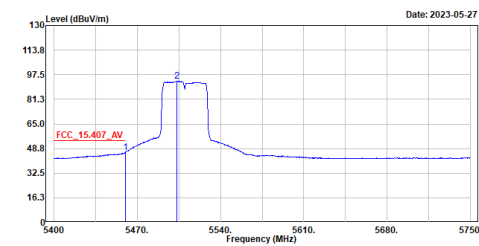

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5459.850	46.29	54.00	-7.71	31.12	15.17	Average
2	5503.250	93.15	-----	-----	77.72	15.43	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac40_5510MHz
TEST BY :Caster

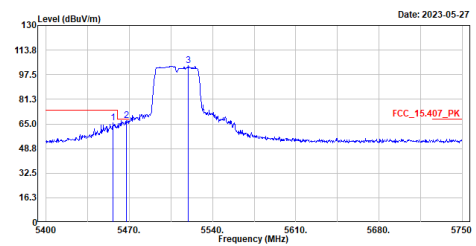

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5456.350	65.66	74.00	-8.34	50.52	15.14	Peak
2	5467.550	67.29	68.22	-0.93	52.08	15.21	Peak
3	5519.350	103.46	-----	-----	87.97	15.49	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac40_5510MHz
TEST BY :Caster

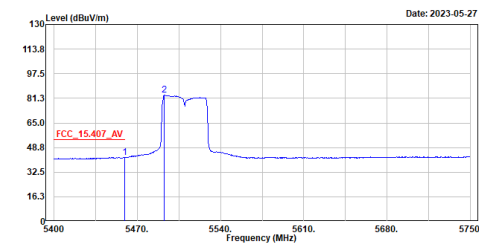

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5459.500	42.13	54.00	-11.87	26.96	15.17	Average
2	5492.750	83.39	-----	-----	68.02	15.37	Average


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac40_5510MHz
TEST BY :Caster

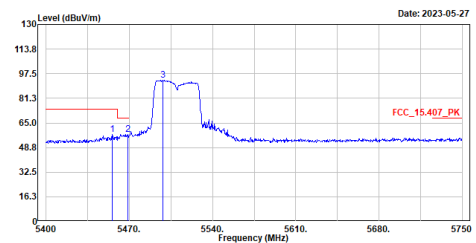


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5455.650	57.23	74.00	-16.77	42.10	15.13	Peak
2	5468.950	57.59	68.22	-10.63	42.37	15.22	Peak
3	5498.350	93.40	-----	-----	78.00	15.40	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

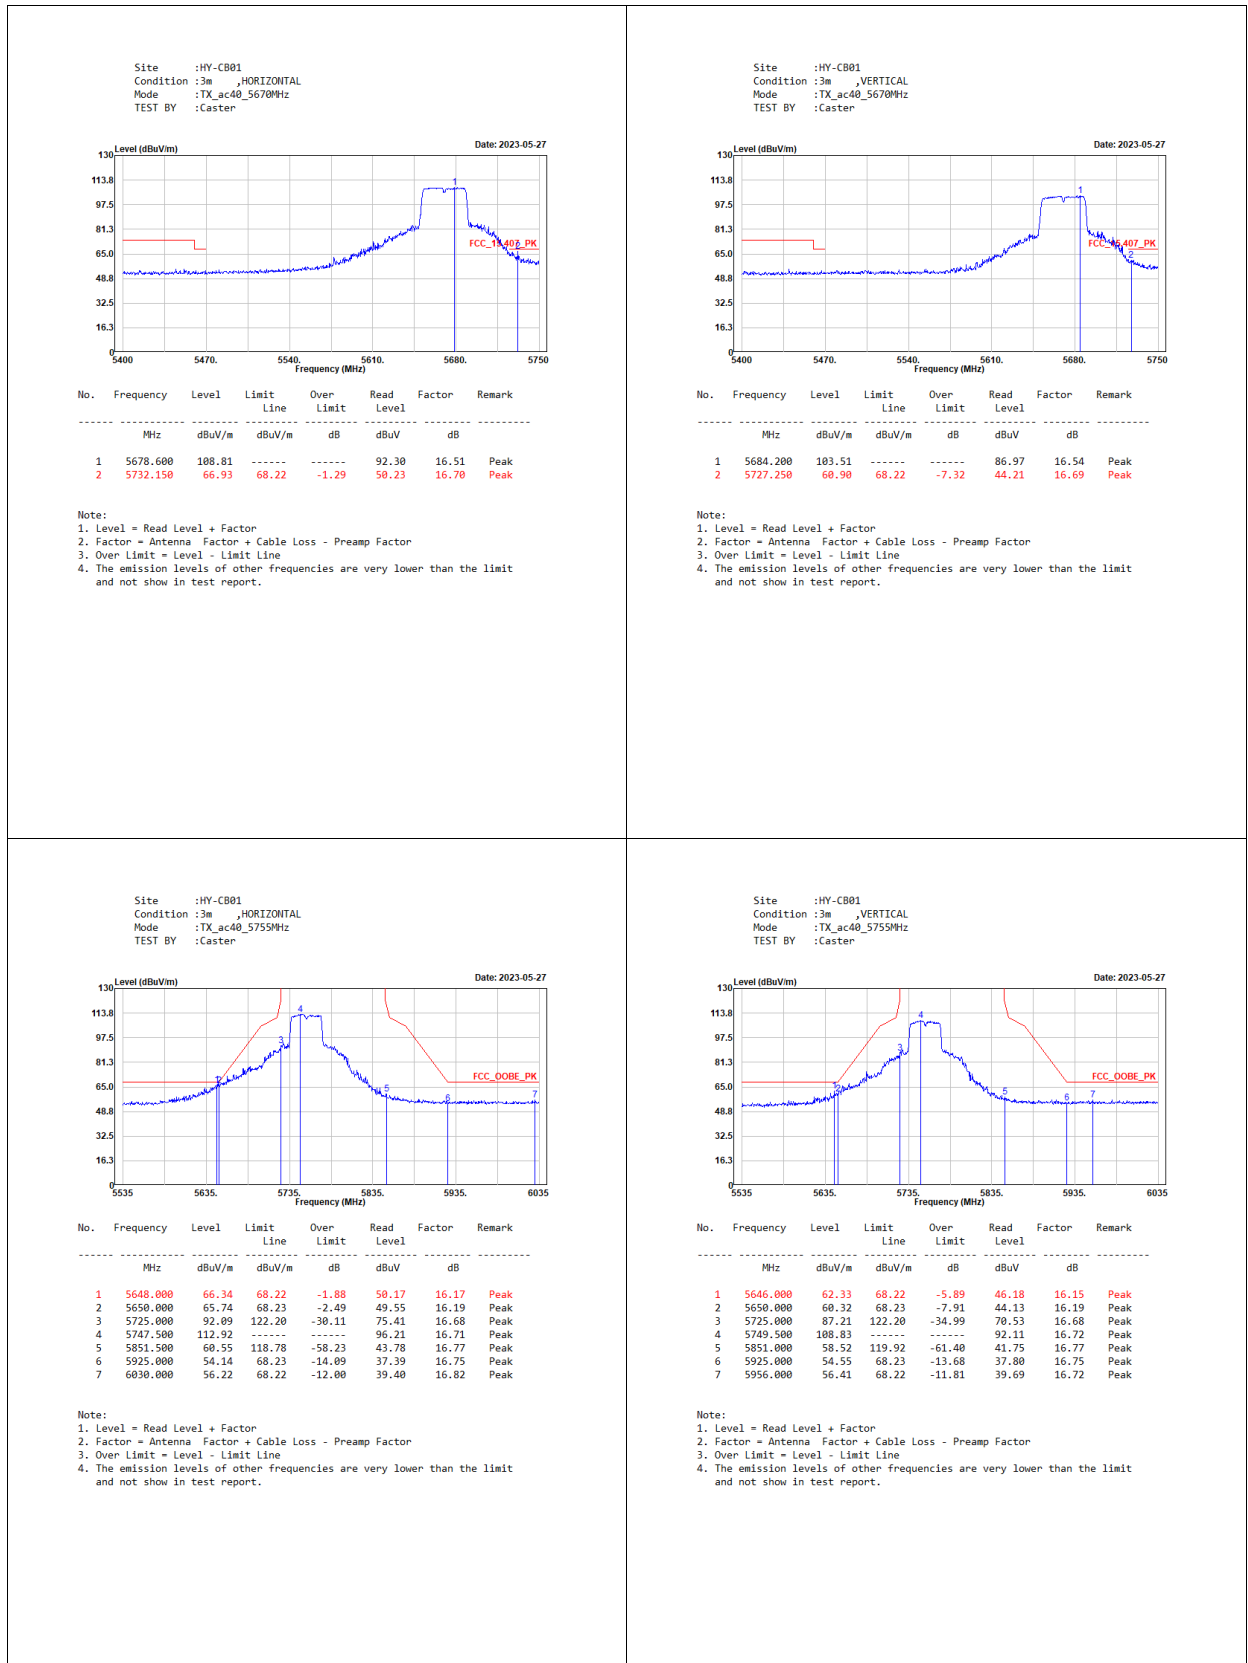

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac80_5795MHz
TEST BY :Caster

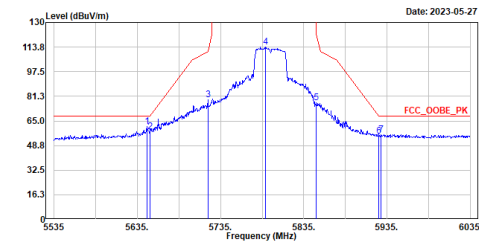


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5646.500	61.50	68.22	-6.72	45.33	16.17	Peak
2	5650.000	57.78	68.23	-10.45	41.59	16.19	Peak
3	5720.000	78.74	110.80	-32.06	62.06	16.68	Peak
4	5789.000	113.90	-----	-----	97.17	16.73	Peak
5	5850.000	76.82	122.20	-45.38	68.05	16.77	Peak
6	5925.000	54.98	68.23	-13.25	38.23	16.75	Peak
7	5928.000	56.16	68.22	-12.06	39.41	16.75	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac80_5795MHz
TEST BY :Caster

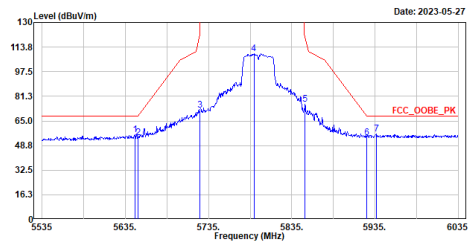


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5647.000	55.72	68.22	-12.50	39.55	16.17	Peak
2	5650.000	53.97	68.23	-14.26	37.78	16.19	Peak
3	5725.000	72.36	122.20	-49.84	55.68	16.68	Peak
4	5789.500	109.41	-----	-----	92.68	16.73	Peak
5	5851.000	75.89	119.92	-44.03	59.12	16.77	Peak
6	5925.000	53.94	68.23	-14.29	37.19	16.75	Peak
7	5936.500	56.39	68.22	-11.83	39.65	16.74	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ac80_5210MHz
TEST BY :Sam

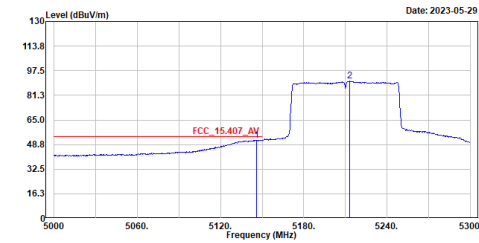


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5145.800	51.64	54.00	-2.36	36.79	14.85	Average
2	5213.300	90.56	-----	-----	75.67	14.89	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ac80_5210MHz
TEST BY :Sam

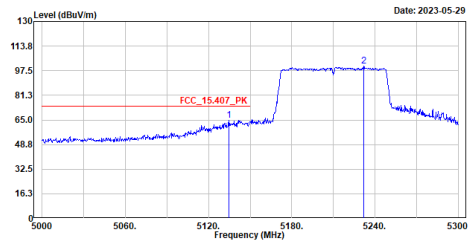


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5134.700	64.91	74.00	-9.09	50.86	14.85	Peak
2	5231.900	100.40	-----	-----	85.52	14.88	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ac80_5210MHz
TEST BY :Sam

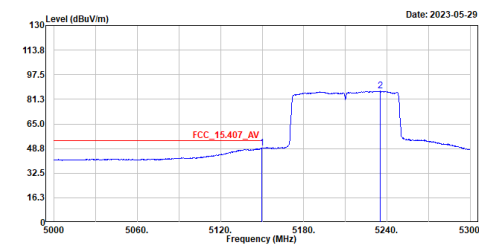

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	5149.700	49.10	54.00	-4.90	34.23	14.87	Average
2	5234.900	86.72	-----	-----	71.84	14.88	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ac80_5210MHz
TEST BY :Sam

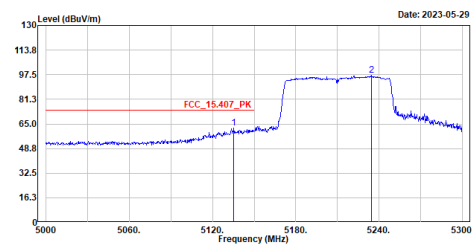

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	5135.300	62.20	74.00	-11.80	47.35	14.85	Peak
2	5234.600	97.21	-----	-----	82.33	14.88	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ac80_5290MHz
TEST BY :Sam

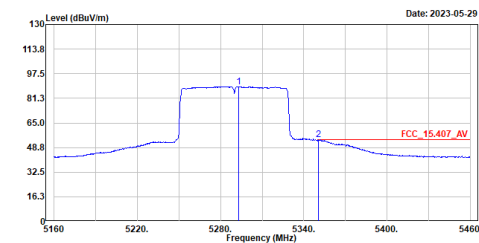

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	5293.200	88.97	-----	-----	74.03	14.94	Average
2	5350.500	53.82	54.00	-0.18	38.83	14.99	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ac80_5290MHz
TEST BY :Sam

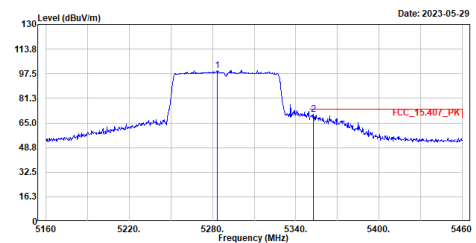

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	5283.300	99.67	-----	-----	84.75	14.92	Peak
2	5352.900	70.54	74.00	-3.46	55.56	14.98	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ac80_5290MHz
TEST BY :Sam

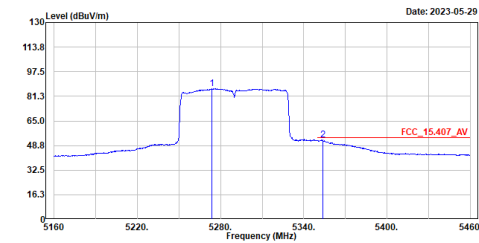

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5273.700	86.28	-----	-----	71.38	14.90	Average
2	5353.800	52.27	54.00	-1.73	37.28	14.99	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ac80_5290MHz
TEST BY :Sam

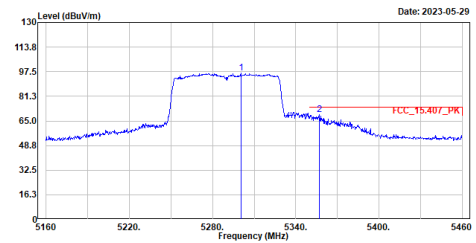

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5300.400	96.45	-----	-----	81.49	14.96	Peak
2	5356.800	68.98	74.00	-5.02	53.99	14.99	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ac80_5530MHz
TEST BY :Sam

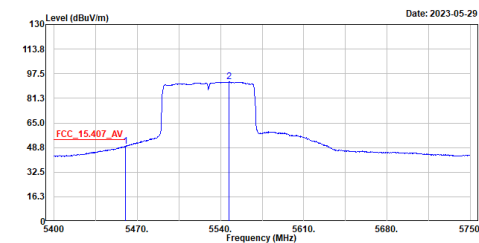

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5459.850	49.46	54.00	-4.54	34.29	15.17	Average
2	5547.000	92.02	-----	-----	76.43	15.59	Average


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ac80_5530MHz
TEST BY :Sam

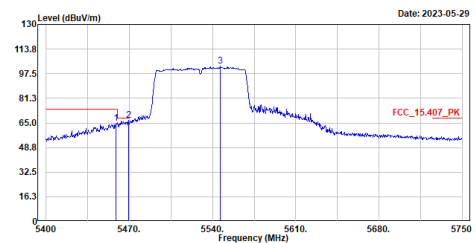


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5458.800	64.99	74.00	-9.01	49.83	15.16	Peak
2	5469.300	66.82	68.22	-1.40	51.60	15.22	Peak
3	5546.300	102.31	-----	-----	86.72	15.59	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

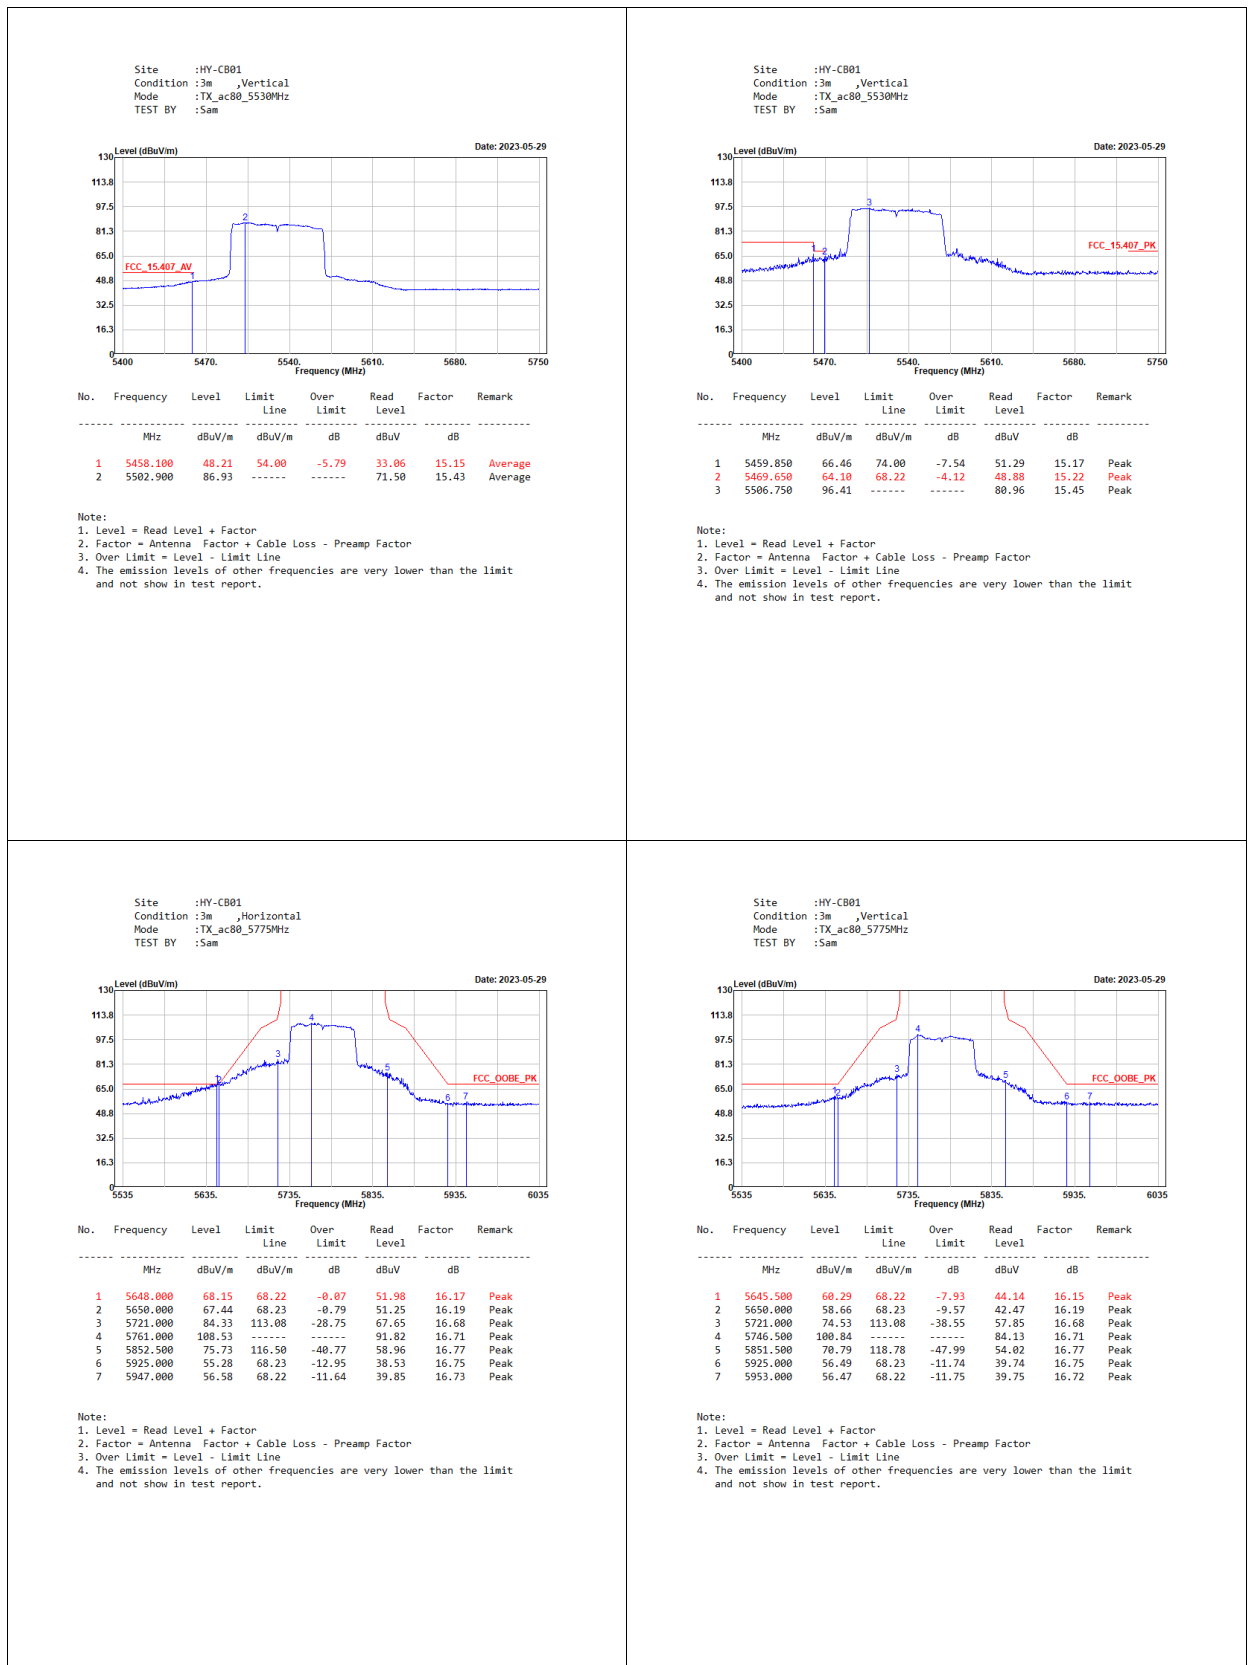

5. Duty Cycle

5.1. Test Setup

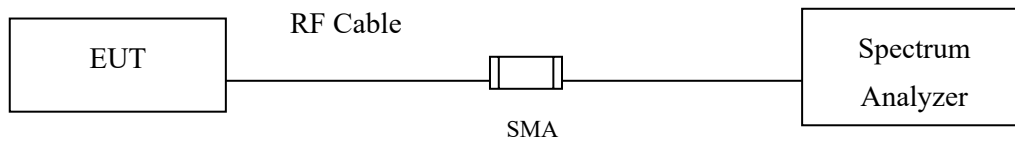

5.2. Test Procedure

The EUT was setup according to ANSI C63.10 2013; tested according to U-NII test procedure of KDB789033 for compliance to FCC 47CFR 15.407 requirements.

5.3. Test Result of Duty Cycle

Product : xPico® 200 Series Wi-Fi® IoT Gateway Module
Test Item : Duty Cycle
Test Mode : Transmit

Duty Cycle Formula:


Duty Cycle = $T_{on} / (T_{on} + T_{off})$

Duty Factor = $10 \log (1/\text{Duty Cycle})$

Results:


5 GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
802.11 a	1.4280	1.4520	98.35	0.07
802.11 n20	2.5800	2.7000	95.56	0.20
802.11 n40	1.2600	1.3680	92.11	0.36
802.11 ac20	2.5900	2.7100	95.57	0.20
802.11 ac40	1.2750	1.3200	96.59	0.15
802.11 ac80	0.6090	0.6510	93.55	0.29

802.11a

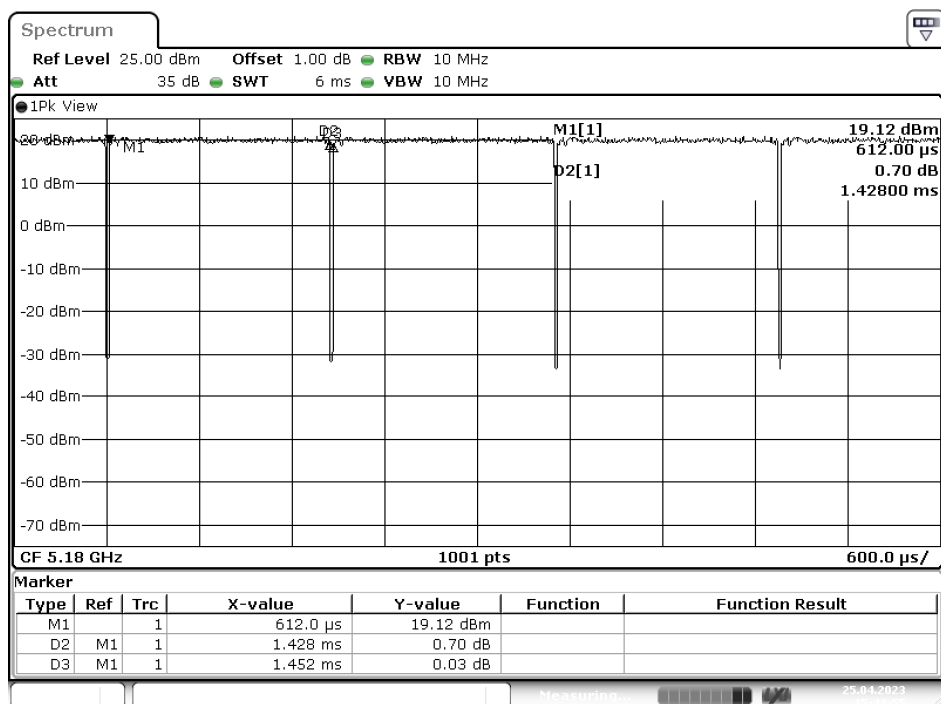


Date: 25.APR.2023 15:43:55

802.11n20

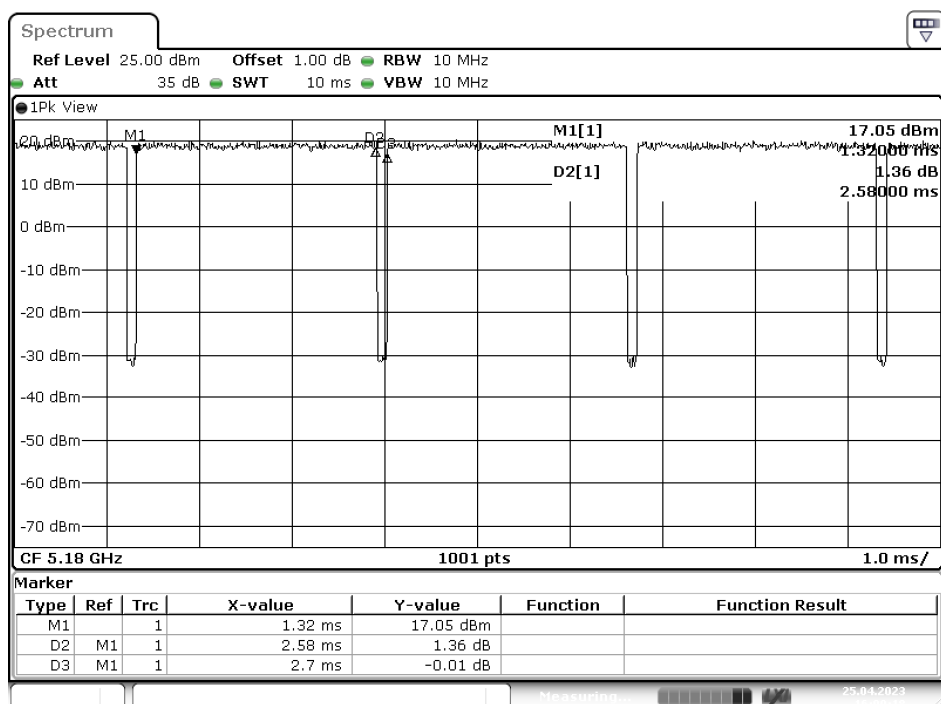


Date: 25.APR.2023 16:00:18

802.11n40

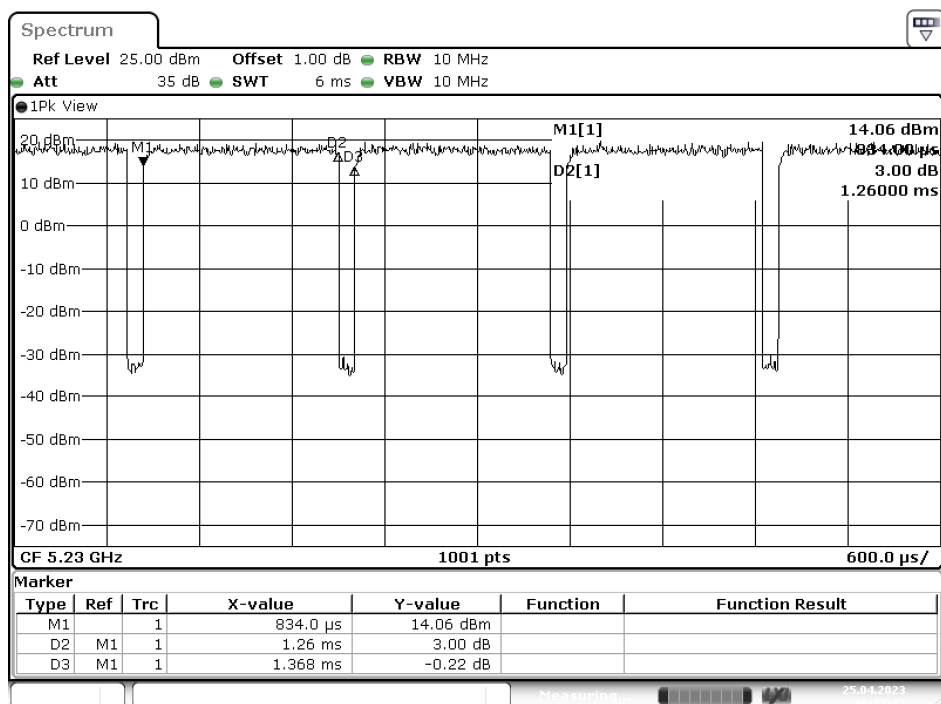


Date: 25.APR.2023 16:27:37

802.11ac20

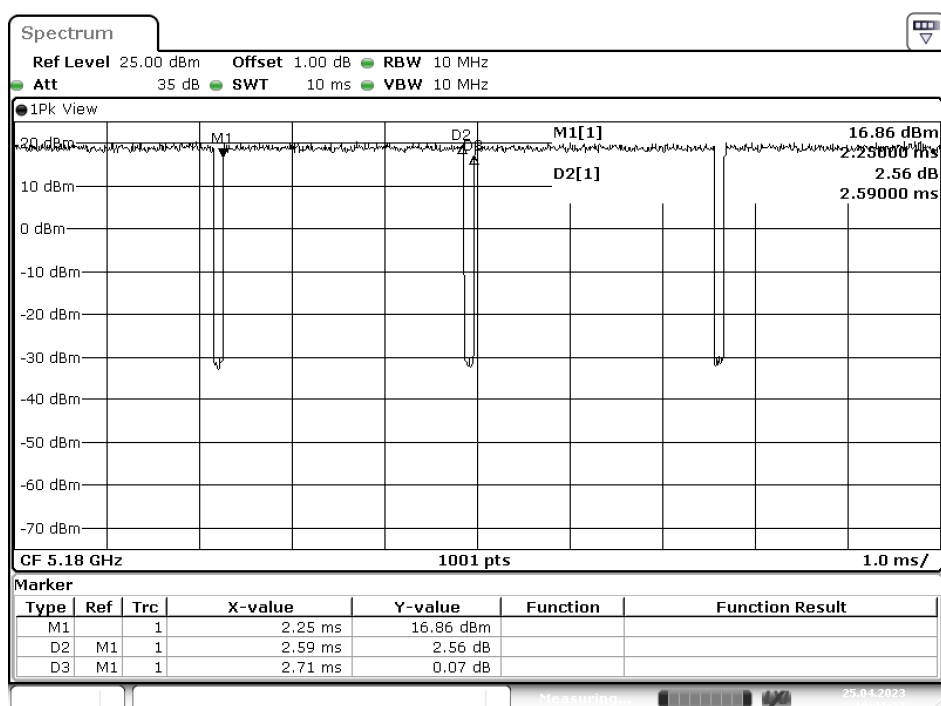


Date: 25.APR.2023 16:41:37

802.11ac40

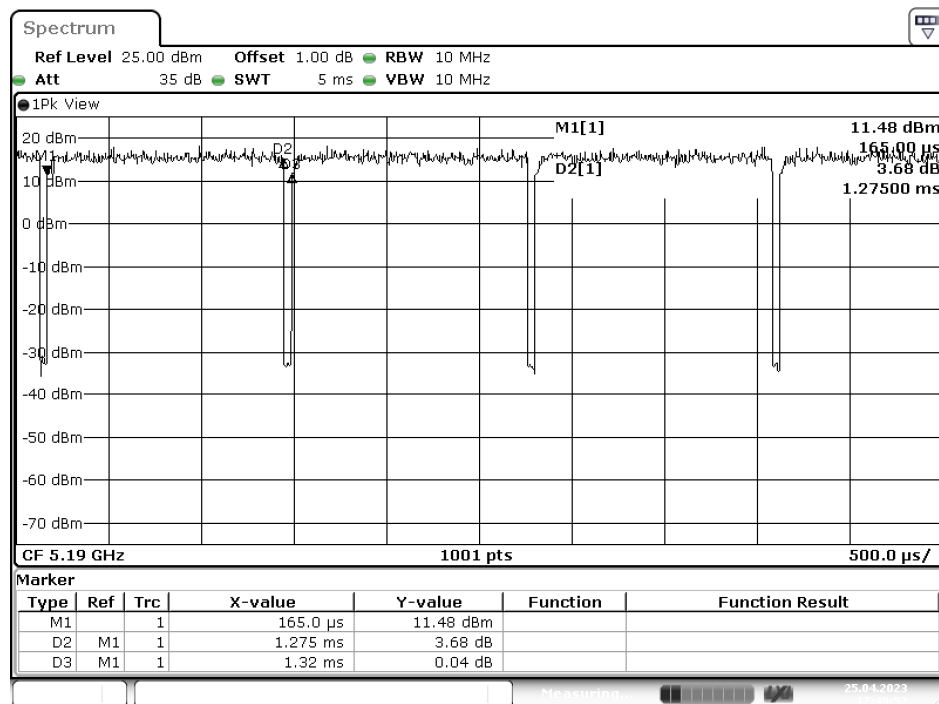

Date: 25.APR.2023 17:49:52

802.11ac80

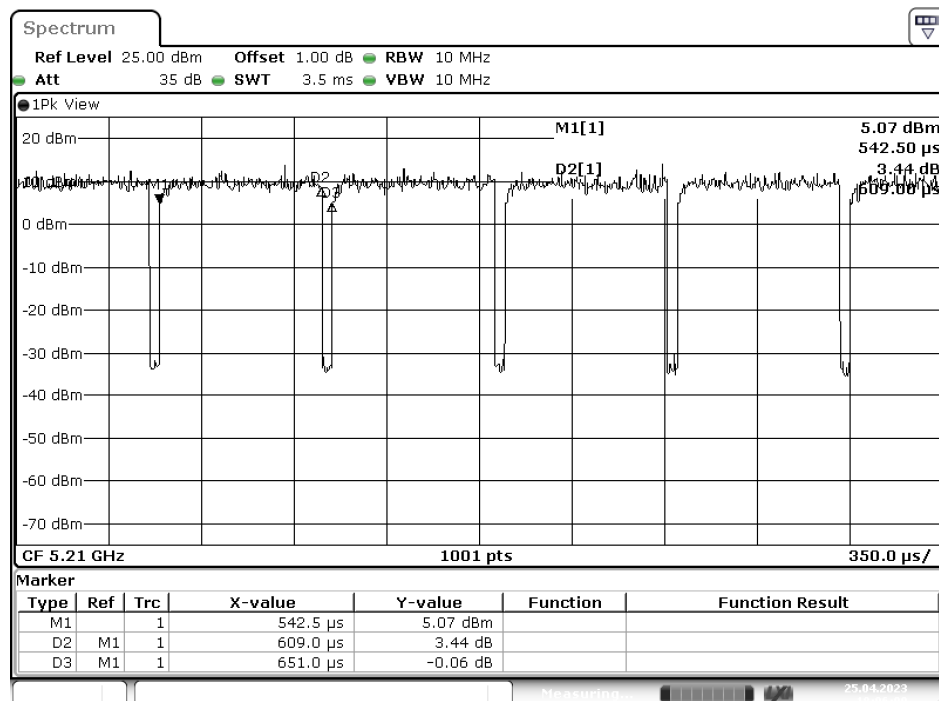

Date: 25.APR.2023 18:06:00