

# **TEST REPORT**

- **APPLICANT** : Shenzhen RAKwireless Technology Co.,Ltd.
- **PRODUCT NAME** : Sticker Tracker
- MODEL NAME : RAK2270
- BRAND NAME : RAK
- FCC ID : 2AF6B-RAK2270
- STANDARD(S) : 47 CFR Part 15 Subpart C
- **RECEIPT DATE** : 2023-11-02
- **TEST DATE** : 2023-11-06 to 2023-11-29
- **ISSUE DATE** : 2023-12-28

Edited by:

Su xiaoxian

Su Xiaoxian (Rapporteur) unc

Approved by:

Shen Junsheng (Supervisor)

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

 Tel:
 86-755-36698555
 Fax:
 86-755-36698525

 Http://www.morlab.cn
 E-mail:
 service@morlab.cn





### DIRECTORY

1. S	Summary of Test Result ······· 4
1.1.	Testing Applied Standards 5
1.2.	Test Equipment List ······ 6
1.3.	Measurement Uncertainty 8
1.4.	Testing Laboratory 8
2. 0	Seneral Description ·······9
2.1.	Information of Applicant and Manufacturer ······ 9
2.2.	Information of EUT ······· 9
2.3.	Channel List of EUT ······10
2.4.	Test Configuration of EUT ·······11
2.5.	Test Conditions11
2.6.	Test Setup Layout Diagram ······11
3. T	est Results ·······14
3.1.	Antenna Requirement ······14
3.2.	Duty Cycle of Test Signal15
3.3.	Maximum Peak Conducted Output Power ······16
3.4.	Maximum Average Conducted Output Power ······17
3.5.	6 dB Bandwidth ······18
3.6.	Conducted Spurious Emissions and Band Edge19
3.7.	Power Spectral Density ······20
3.8.	Conducted Emission ······21
3.9.	Radiated Emission ······22
Ann	ex A Test Data and Result ······24





Change History					
Version	Date	Reason for change			
1.0 2023-12-28		First edition			



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



## 1. Summary of Test Result

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	N/A	Duty Cycle of Test Signal	Nov, 14, 2023	Su Xiaoxian	PASS	No deviation
3	15.247(b)	Maximum Peak Conducted Output Power	Nov, 26, 2023	Su Xiaoxian	PASS	No deviation
4	15.247(b)	Maximum Average Conducted Output Power	Nov, 26, 2023	Su Xiaoxian	PASS	No deviation
5	15.247(a)	Bandwidth	Nov, 14, 2023	Su Xiaoxian	PASS	No deviation
6	15.247(d)	Conducted Spurious Emission and Band Edge	Nov, 14, 2023	Su Xiaoxian	PASS	No deviation
7	15.247(e)	Power Spectral Density	Nov, 14, 2023	Su Xiaoxian	PASS	No deviation
8	15.207	Conducted Emission	Nov. 08, 023	Wang Deyong	PASS	No deviation
9	15.209, 15.247(d)	Radiated Emission	Nov. 242023	Gao Jianrou	PASS	No deviation

**Note 1:** The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013 and KDB 558074 D01 v05r02.

**Note 2:** Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

**Note 3:** When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.





### **1.1. Testing Applied Standards**

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

• 47 CFR Part 15 Subpart C Radio Frequency Devices



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



### 1.2. Test Equipment List

#### **1.2.1 Conducted Test Equipments**

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Due Date
EXA Signal	MY53470836	N9010A	Agilopt	2023.02.27	2024.02.26
Analzyer	MT55470650	119010A	Agilent	2023.02.27	2024.02.20
RF Cable		RF01	Morlab	N1/A	NI/A
(30MHz-26GHz)	CB01	REUI	INIOLIAD	N/A	N/A
Coaxial Cable	CB02	RF02	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

#### 1.2.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2023.02.09	2024.02.08
LISN	8127449	NSLK 8127	Schwarzbeck	2023.02.21	2024.02.20
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2023.06.27	2024.06.26
RF Coaxial Cable (DC-100MHz)	BNC	MRE04	Qualwave	N/A	N/A

#### 1.2.3 List of Software Used

Description	Manufacturer	Software Version
Test System	MaiWei	2.0.0.0
Morlab EMCR	Morlab	V1.2
TS+ -[JS32-CE]	Tonscend	V2.5.0.0






#### 1.2.4 Radiated Test Equipments

Equipment	Serial No.	Туре	Manufacturer	Cal. Date	Due Date
Name		Type	Manalacturer		Bue Bute
Receiver	MY54130016	N9038A	Agilent	2023.06.21	2024.06.20
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2022.05.25	2025.05.24
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2022.02.11	2025.02.10
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2022.07.13	2025.07.12
Test Antenna – Horn	BBHA9170 #773	BBHA9170	Schwarzbeck	2022.07.14	2025.07.13
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2023.06.26	2024.06.27
Preamplifier (2GHz-18GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2023.06.26	2024.06.27
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118- 40C-S	Decentest	2023.07.04	2024.07.03
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-K K-0.5	Qualwave	2023.07.04	2024.07.03
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-K KF-2	Qualwave	2023.07.04	2024.07.03
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18-N N-5	Qualwave	2023.07.04	2024.07.03
Notch Filter	N/A	WRCG-2400- 2483.5-60SS	Wainwright	N/A	N/A
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.05.10	2025.05.09



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China





### **1.3. Measurement Uncertainty**

Test Items	Uncertainty	Remark
Peak Output Power	±2.22dB	Confidence levels of 95%
Power Spectral Density	±2.22dB	Confidence levels of 95%
Bandwidth	±5%	Confidence levels of 95%
Conducted Spurious Emission	±2.77dB	Confidence levels of 95%
Restricted Frequency Bands	±5%	Confidence levels of 95%
Radiated Emission	±2.95dB	Confidence levels of 95%
Conducted Emission	±2.44dB	Confidence levels of 95%

### 1.4. Testing Laboratory

Laboratory Name	Shenzhen Morlab Communications Technology Co., Ltd.
	FL.3, Building A, FeiYang Science Park, No.8 LongChang
Laboratory Address	Road, Block 67, BaoAn District, ShenZhen, GuangDong
	Province, P. R. China
Telephone	+86 755 36698555
Facsimile	+86 755 36698525
FCC Designation Number	CN1192
FCC Test Firm	226174
Registration Number	220174





## 2. General Description

### 2.1. Information of Applicant and Manufacturer

Applicant	Shenzhen RAKwireless Technology Co.,Ltd.		
Annlinent Address	Room 506, Building B, New Compark, Pingshan First Road,		
Applicant Address	Taoyuan Street, Nanshan District, Shenzhen, Guangdong, China		
Manufacturer	Shenzhen RAKwireless Technology Co.,Ltd.		
	Room 506, Building B, New Compark, Pingshan First Road,		
Manufacturer Address	Taoyuan Street, Nanshan District, Shenzhen, Guangdong, China		

### 2.2. Information of EUT

Product Name:	Sticker Tracker		
Sample No.:	4#		
Hardware Version:	N/A		
Software Version:	N/A		
Equipment Type:	DTS		
Modulation Type:	LoRa		
Data Rate:	SF8		
<b>Operating Frequency Range:</b>	DTS: 903.0MHz ·	- 914.2MHz	
Antenna Type:	PCB Antenna		
Antenna Gain:	2dBi		
	Battery		
	Brand Name:	N/A	
	Model No.:	CP145550	
Accessory Information:	Serial No.:	N/A	
Accessory mormation.	Capacity:	600mAh	
	Rated Voltage:	3V	
	Charge Limit:	N/A	
	Manufacturer:	Foshan Jiezhen Technology Co.,Ltd.	

Note 1: We use the dedicated software to control the EUT continuous transmission.

**Note 2:** For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.





### 2.3. Channel List of EUT

Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	903	5	909.4
2	904.6	6	911
3	906.2	7	912.6
4	907.8	8	914.2

Note 1: The black bold channels were selected for test.




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn





### 2.4. Test Configuration of EUT


Test mode is used to control the EUT under the maximum power level during test.

### 2.5. Test Conditions


Temperature (°C)	15-35
Relative Humidity (%)	30-60
Atmospheric Pressure (kPa)	86-106

### 2.6. Test Setup Layout Diagram

#### 2.6.1.Conducted Measurement



#### 2.6.2.Conducted Emission Measurement

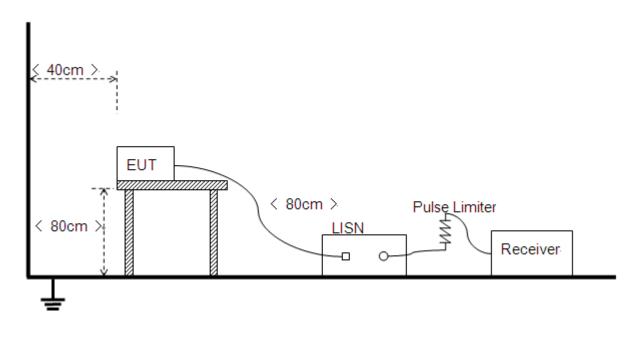



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China


 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn




#### 2.6.3.Radiation Measurement

1) For radiated emissions from 9kHz to 30MHz

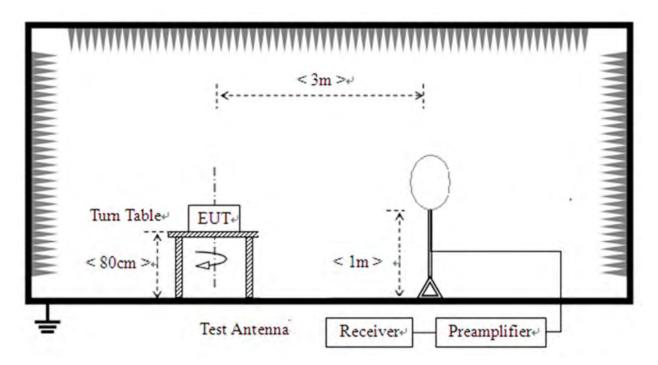

2) For radiated emissions from 30MHz to1GHz

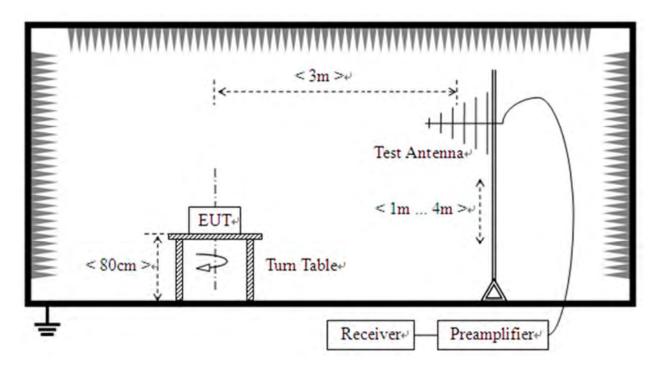




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



3) For radiated emissions above 1GHz

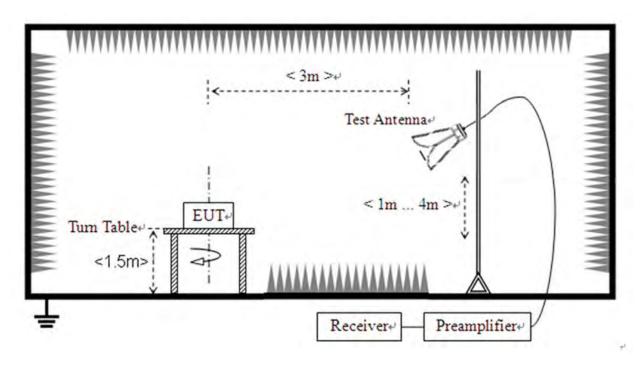



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



### 3.1. Antenna Requirement

#### 3.1.1.Requirement

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### 3.1.2.Test Result

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.



Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn



### 3.2. Duty Cycle of Test Signal

#### 3.2.1.Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration(T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than  $\pm 2\%$ ; otherwise, the duty cycle is considered to be non constant.

#### 3.2.2.Test Result

Refer to Annex A.1 in this report.





### 3.3. Maximum Peak Conducted Output Power

#### 3.3.1.Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

#### 3.3.2.Test Procedures

KDB 558074 Section 8.3.1 was used in order to prove compliance.

#### 3.3.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

#### 3.3.4.Test Result

Refer to Annex A.2 in this report.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 8

Fax: 86-755-36698525

Http://www.morlab.cn



### 3.4. Maximum Average Conducted Output Power

#### 3.4.1.Requirement

According to FCC section 15.247(b)(3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum average conducted output power of the intentional radiator shall not exceed 1 Watt.

#### 3.4.2.Test Procedures

KDB 558074 Section 8.3.2 was used in order to prove compliance.

#### 3.4.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

#### 3.4.4.Test Result

Refer to Annex A.3 in this report.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 E-mail: service@morlab.cn

Http://www.morlab.cn





### 3.5.1.Requirement

According to FCC section 15.247(a) (2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

#### 3.5.1.Test Procedures

The steps for the first option are as follows:

- a) Set analyzer center frequency to channel center frequency
- b) Set RBW to100kHz
- c) Set VBW to 300kHz
- d) Detector = peak.
- e) Trace mode = max hold
- f) Sweep time = auto couple
- g) Allow the trace to fully stabilize

h) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by6 dB relative to the maximum level measured in the fundamental emission

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW  $\geq$  3  $\times$  RBW, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be  $\geq$ 6 dB.


#### 3.5.2.Test Setup Layout

Refer to chapter 2.6.1 in this report.

#### 3.5.3.Test Result

Refer to Annex A.4 in this report.







### 3.6. Conducted Spurious Emissions and Band Edge

#### 3.6.1.Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

#### 3.6.2.Test Procedures

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.

#### 3.6.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

#### 3.6.4.Test Result

Refer to Annex A.5 and A.6 in this report.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn

Fax: 86-755-36698525



### 3.7. Power Spectral Density

#### 3.7.1.Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

#### 3.7.2.Test Procedures

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- a) Set analyzer center frequency to channel center frequency
- b) Set span to1.5 times DTS
- c) Set RBW to 3kHz
- d) Set VBW to 10kHz
- e) Detector = peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize

i) Use the peak marker function to determine the maximum amplitude level within the RBW

#### 3.7.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

#### 3.7.4.Test Result

Refer to Annex A.7 in this report.





### 3.8. Conducted Emission

#### 3.8.1.Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a  $50\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).

Frequency Penge (MHz)	Conducted Limit (dBµV)				
Frequency Range (MHz)	Quai-peak	Average			
0.15 - 0.50	66 to 56	56 to 46			
0.50 - 5	56	46			
5 - 30	60	50			

Note:

(a) The lower limit shall apply at the band edges.

(b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

#### 3.8.2.Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

#### 3.8.3.Test Setup Layout

Refer to chapter 2.6.2 in this report.

#### 3.8.4.Test Result

Refer to Annex A.8 in this report.





### 3.9. Radiated Emission

#### 3.9.1.Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (µV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

**Note1:** For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit. **Note2:**For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).





#### 3.9.2.Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz.The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

#### 3.9.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

#### 3.9.4.Test Result

Refer to Annex A.9 in this report.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn



## **Annex A Test Data and Result**

#### A.1. Duty Cycle of Test Signal

Condition	Mode/Data Rate	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	LoRa DTS_SF8	903	Ant1	100	0	0
NVNT	LoRa DTS_SF8	907.8	Ant1	100	0	0
NVNT	LoRa DTS_SF8	914.2	Ant1	100	0	0



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



ent Spectrum Analyzer - S RL INF SU enter Freq 903.00	9 4C 00000 MHz	SENSERIN Fast Trig:	Free Run	ALIGNOF Avg Type: Lo		8:15:19 PMNov 14, 202 TRACE 2 4 TYPE
Ref Offset	IEGai		en: 30 dB	-	M	kr1 5.000 ms
dB/div Ref 30.00	dBm		1	1	1	12.89 dBn
α. 						
10						
ia						
10 10						
enter 903.000000 M s BW 8 MHz	ИНz	#VBW 8.0	MHz		Sweep 10.0	Span 0 H 0 ms (1001 pts
R MODE TRC SCL	× 5.000 ms	v 12.89 dBm		UNCTION WIDTH	FUNCTION V	
	0,000 ms					
				Co STATUS		3
	Duty Cycle N	IVNT LoRa	a DTS_SF		Hz Ant1	×
ient Spectrum Analyzer - S	wept SA			-8 907.8MI		
	wept SA Q AC DOOOO MHz PNO:	SENSEIN	Free Run		0	6:21:31 PMNov 14, 202 TRACE DE CONTRACT
rent Spectrum Analyzer - S RL RF 900 Enter Freq 907.8( Ref Offset	wept 5A 200000 MHz PNO: IFGain 11.62 dB	SENSEIN	e i	-8 907.8MI	og-Pwr	8:21:31 PM Nov 14, 202 TRACE DE T TYPE WARMAN CET P 1111111 Kr1 5.000 m
RL IF So Enter Freq 907.80 Ref Offset B/dl/ Ref 30.00	wept 5A 200000 MHz PNO: IFGain 11.62 dB	SENSEIN	Free Run	-8 907.8MI	og-Pwr	8:21:31 PM/Nov 14, 202 TRACE ] 2 TYPE WWWWW DET P NUMBER Kr1 5.000 ms
ent Spectrum Analyzer - S RL (F) 30 enter Freq 907.80 Ref Offset dB/div Ref 30.00	wept 5A 200000 MHz PNO: IFGain 11.62 dB	SENSEIN	Free Run en: 30 dB	-8 907.8MI	og-Pwr	8:21:31 PM Nov 14, 202 TRACE D 2 TYPE WWWWW DET P NUMP Kr1 5.000 m
ent Spectrum Analyzer - S RL 0F 30 enter Freq 907.80 Ref Offset dB/div Ref 30.00	wept 5A 200000 MHz PNO: IFGain 11.62 dB	SENSEIN	Free Run en: 30 dB	-8 907.8MI	og-Pwr	8:21:31 PM Nov 14, 202 TRACE D 2 TYPE WWWWW DET P NUMP Kr1 5.000 m
Ref Offset	wept 5A 200000 MHz PNO: IFGain 11.62 dB	SENSEIN	Free Run en: 30 dB	-8 907.8MI	og-Pwr	6:21:31 PMNov 14, 202
Ref Offset	wept 5A 200000 MHz PNO: IFGain 11.62 dB	SENSEIN	Free Run en: 30 dB	-8 907.8MI	og-Pwr	8:21:31 PM/Nov 14, 202 TRACE ] 2 TYPE WWWWW DET P NUMBER Kr1 5.000 ms
RL IF 300 RL IF 300 Enter Freq 907.80 Ref Offset dB/dlv Ref 30.00	wept 5A 200000 MHz PNO: IFGain 11.62 dB	SENSEIN	Free Run en: 30 dB	-8 907.8MI	og-Pwr	8:21:31 PM/Nov 14, 202 TRACE ] 2 TYPE WWWWW DET P NUMBER Kr1 5.000 ms
Ref Offset	wept SA 2 AC 100000 MHz PNO: IFGai 11.62 dB 0 dBm	SENSEIN	Free Run en: 30 dB	-8 907.8MI	og-Pwr	6:21:31 PMNov 14, 202 TRACE 123 49 TYPE PMNUM cer PMNUM kr1 5:000 ms 20.32 dBn
Ref Offset BL Ref Offset BL Ref 30.00 Ref 30.0	Wept SA 2 AC PNO: IT:62 dB dBm MHz	SENSEIN	Free Run an: 30 dB	Avg Type: L	og.Pwr M	6:21:31 PMNov 14, 202 TRACE 123 4 TYPE 1 MINUT FOR 123 4 20.32 dBn 20.32 dBn Span 0 H: 0 ms (1001 pts
Ref Offset	wept SA 2 AC 100000 MHz PNO: IFGai 11.62 dB 0 dBm	Fast - Trig:	Free Run an: 30 dB	-8 907.8MI	og.Pwr	6:21:31 PMNov 14, 202 TRACE 123 4 TYPE 1 MINUT FOR 123 4 20.32 dBn 20.32 dBn Span 0 H: 0 ms (1001 pts
Ref Offset	wept SA 2 AC PNO: II.62 dB I dBm ABM ABM ABM ABM ABM ABM ABM ABM	Fast Trig: HAtte	Free Run an: 30 dB	Avg Type: L	og.Pwr M	6:21:31 PMNov 14, 202 TRACE 123 4 TYPE 1 MINUT FOR 123 4 20.32 dBn 20.32 dBn Span 0 H: 0 ms (1001 pts
RL         IF         SO           RL         IF         SO           Inter         Freq         SO           Inter         SO         SO	wept SA 2 AC PNO: II.62 dB I dBm ABM ABM ABM ABM ABM ABM ABM ABM	Fast Trig: HAtte	Free Run an: 30 dB	Avg Type: L	og.Pwr M	6:21:31 PMNov 14, 202 TRACE 123 4 TYPE 1 MINUT FOR 123 4 20.32 dBn 20.32 dBn Span 0 H: 0 ms (1001 pts



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



RL		200000 MHz	rast	: Free Run en: 30 dB	ALIGNOFF Avg Type: L	og-Pwr	08:25:51 PM Nov 14, 20 TRACE 23 4 5 TYPE WALK
0 dB/div	Ref Offset Ref 30.0						Mkr1 5.000 m 20.22 dBr
0g				<b>(</b> 1			
10.0							
0.00							
10.0							
10.0							
39.0							
46/0							
50.0							
eta iŭ							
center 91 Res BW 8	4.200000 MHz	MHz	#VBW 8.0	MHz		Sweep	Span 0 H 10.00 ms (1001 pt
KR MODE TH	IC SCL	×	Y.	FUNCTION	FUNCTION WIDTH	FUN	ICTION VALUE
1 N 1 2	- E	5.000 ms	20.22 dBm				
3							
5							
6 7							
8							



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



#### A.2. Maximum Peak Conducted Output Power

Condition	Mode/Data Rate	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit (dBm)	Verdict
NVNT	LoRa DTS_SF8	903	Ant1	14.94	0	14.94	0.03119	30	Pass
NVNT	LoRa DTS_SF8	907.8	Ant1	14.88	0	14.88	0.03076	30	Pass
NVNT	LoRa DTS_SF8	914.2	Ant1	14.75	0	14.75	0.02985	30	Pass




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn




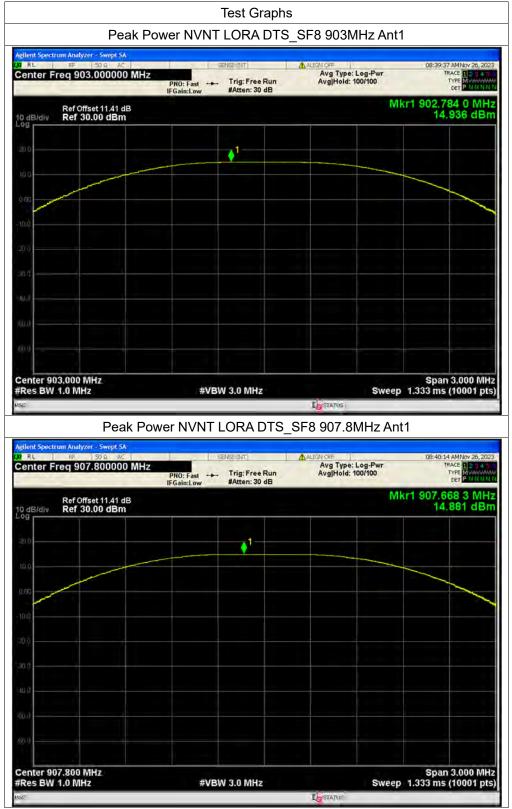



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



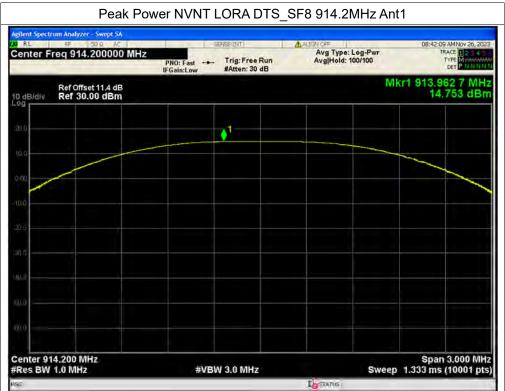



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



#### A.3. Maximum Average Conducted Output Power

Condition	Mode/Data Rate	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit (dBm)	Verdict
NVNT	LoRa DTS_SF8	903	Ant1	14.84	0	14.84	0.03048	30	Pass
NVNT	LoRa DTS_SF8	907.8	Ant1	14.73	0	14.73	0.02972	30	Pass
NVNT	LoRa DTS_SF8	914.2	Ant1	14.54	0	14.54	0.02844	30	Pass




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



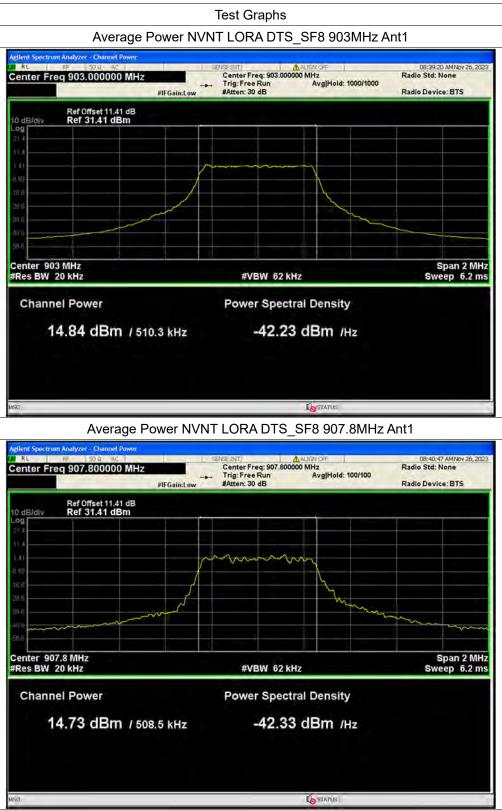




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn



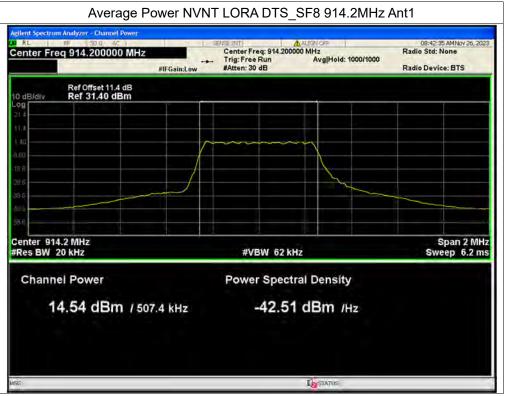



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



#### A.4. 6 dB Bandwidth

Condition	Mode/Data Rate	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	LoRa DTS_SF8	903	Ant1	0.624	0.5	Pass
NVNT	LoRa DTS_SF8	907.8	Ant1	0.627	0.5	Pass
NVNT	LoRa DTS_SF8	914.2	Ant1	0.613	0.5	Pass




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



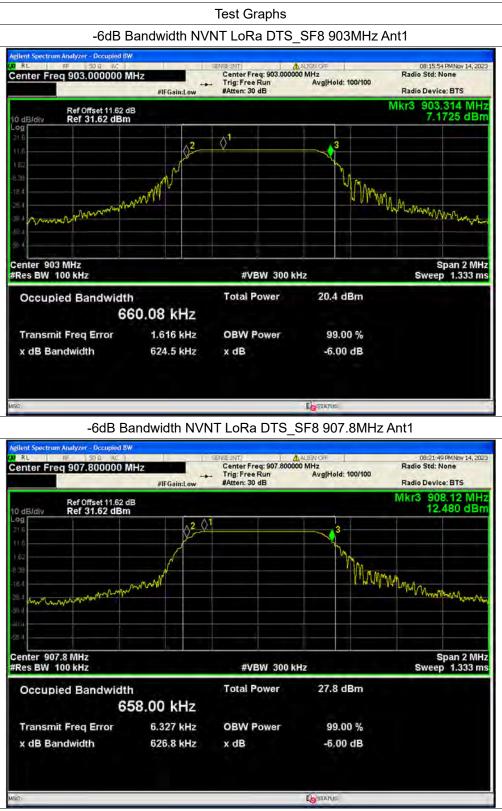



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn







Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



#### A.5. Conducted Spurious Emissions

Condition	Mode/Data Rate	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	LoRa DTS_SF8	903	Ant1	-51.54	-20	Pass
NVNT	LoRa DTS_SF8	907.8	Ant1	-51.61	-20	Pass
NVNT	LoRa DTS_SF8	914.2	Ant1	-49.92	-20	Pass




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525


Http://www.morlab.cn



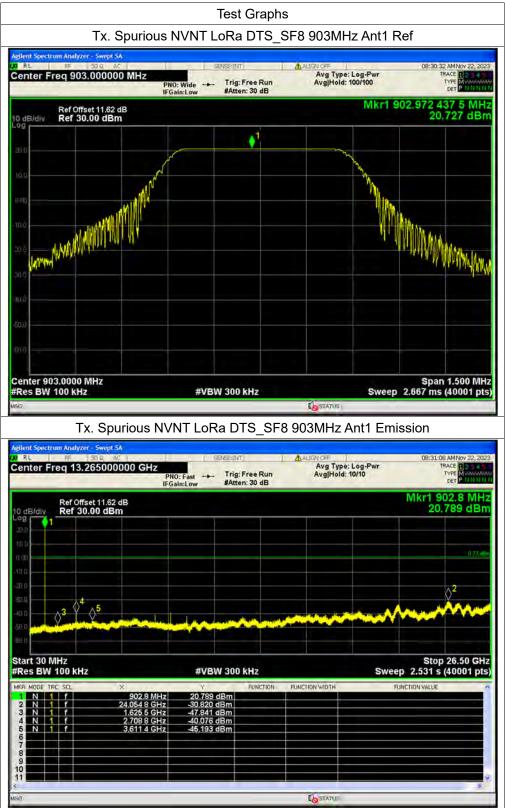

MORLAB



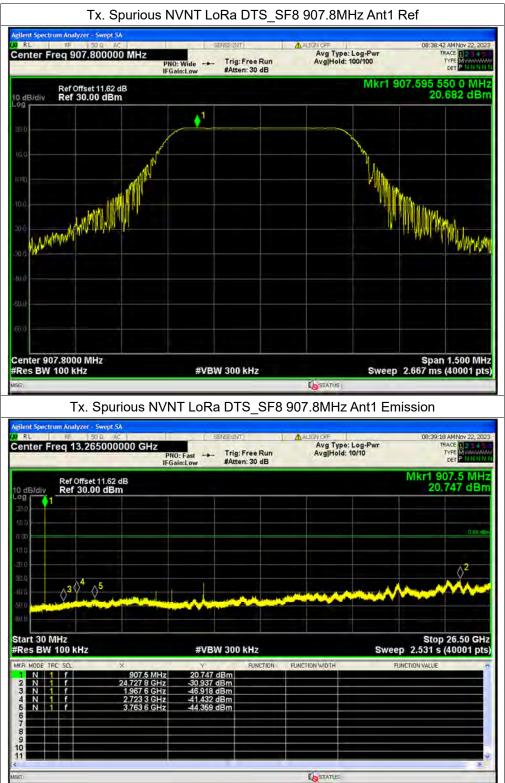

E-mail: service@morlab.cn


Fax: 86-755-36698525

Tel: 86-755-36698555

Http://www.morlab.cn

MORLAB



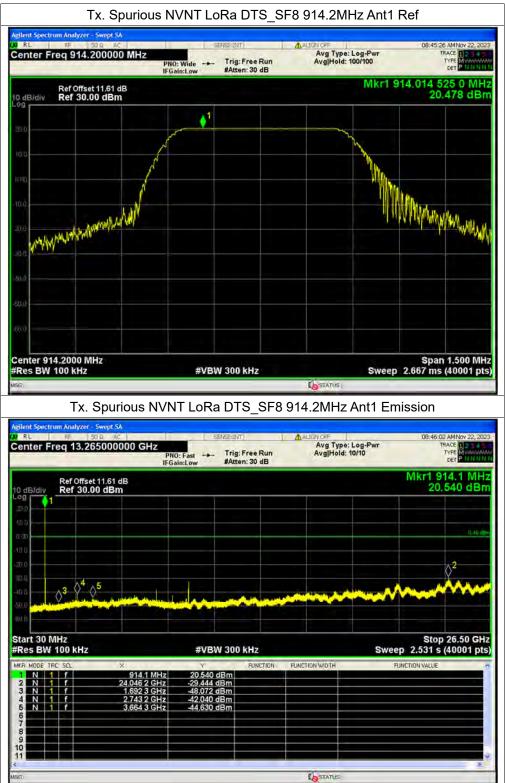

**MORLAB** 



# A.6. Band Edge

Condition	Mode/Data Rate	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	LoRa DTS_SF8	903	Ant1	-50.57	-20	Pass
NVNT	LoRa DTS_SF8	914.2	Ant1	-68.22	-20	Pass




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



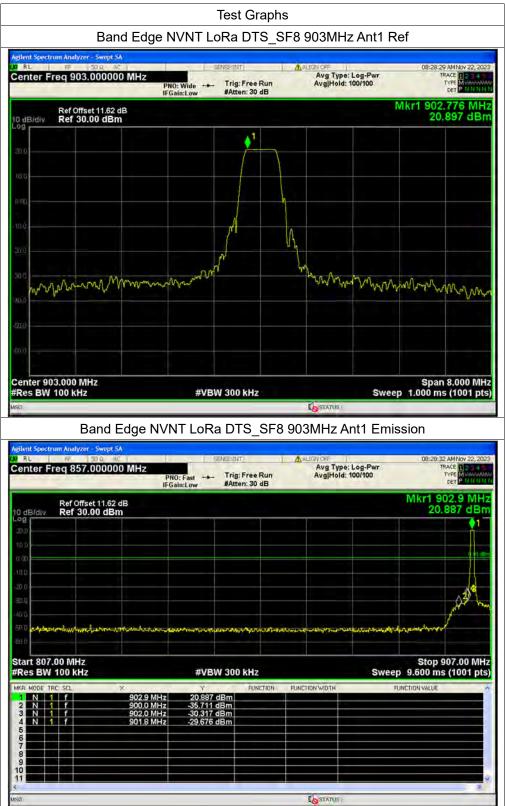


**MORLAB** 

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn



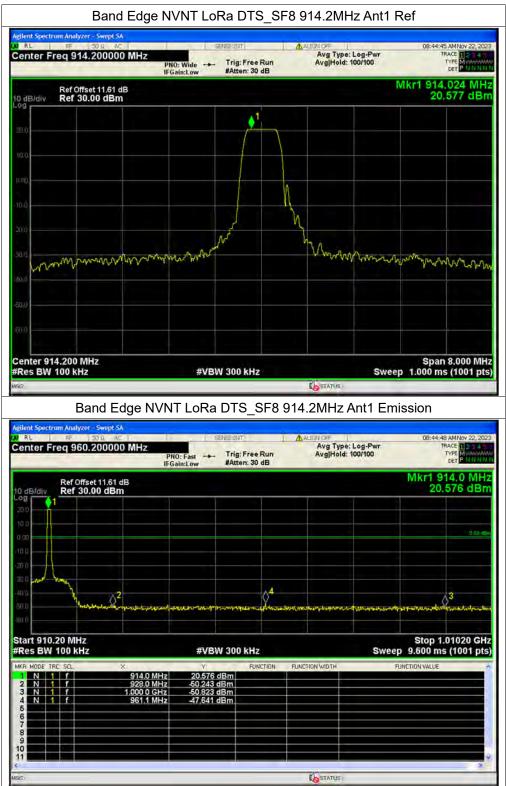

**MORLAB** 



# A.7. Power Spectral Density

Condition	Mode/Data Rate	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Duty Factor (dB)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	LoRa DTS_SF8	903	Ant1	5.8	0	5.8	8	Pass
NVNT	LoRa DTS_SF8	907.8	Ant1	5.6	0	5.6	8	Pass
NVNT	LoRa DTS_SF8	914.2	Ant1	5.51	0	5.51	8	Pass




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



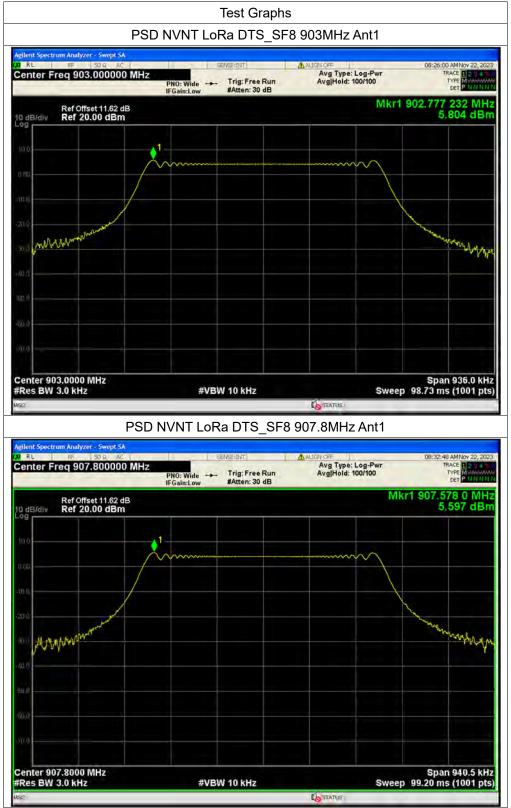









Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



### A.8. Conducted Emission

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

**Note:** Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

#### A. Test Setup:

Test Mode: <u>EUT+PC+PC Adapter+902M TX</u> Test voltage: <u>AC 120V/60Hz</u> The measurement results are obtained as below: E [dB $\mu$ V] =U<sub>R</sub> + L<sub>Cable loss</sub> [dB] + A<sub>Factor</sub> U<sub>R</sub>: Receiver Reading A<sub>Factor</sub>: Voltage division factor of LISN




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn




#### **B. Test Plot:**

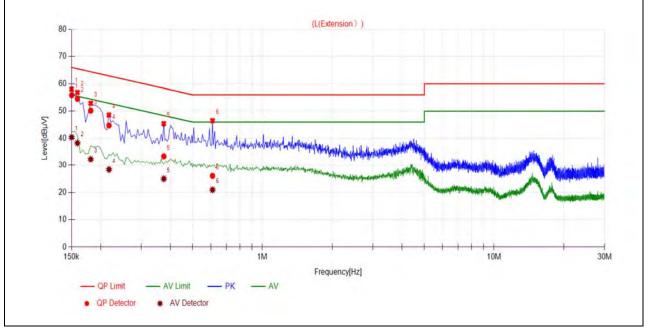


(L Phase)

No.	Fre.	Emission Level (dBµV)		Limit (	dBµV)	Power-line	Verdict
	(MHz)	Quai-peak	Average	Quai-peak	Average		. e. diot
1	0.1502	55.88	40.39	65.99	55.99		PASS
2	0.1590	54.56	38.28	65.51	55.51		PASS
3	0.1815	50.23	32.30	64.42	54.42	Line	PASS
4	0.2177	44.76	28.38	62.91	52.91	Line	PASS
5	0.3752	33.37	24.96	58.39	48.39		PASS
6	0.6091	26.05	20.90	56.00	46.00		PASS







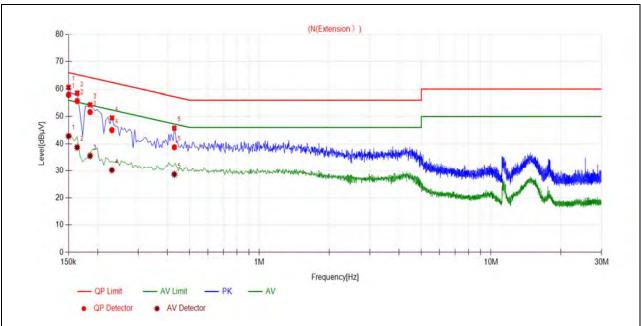

(N	Phase)	
----	--------	--

No.	Fre.	Emission Level (dBµV)		Limit (	dBµV)	Power-line	Verdict
	(MHz)	Quai-peak	Average	Quai-peak	Average		
1	0.1501	57.94	42.83	66.00	56.00		PASS
2	0.1634	55.69	38.70	65.29	55.29		PASS
3	0.1858	51.66	35.57	64.22	54.22	Noutral	PASS
4	0.2308	45.03	30.23	62.42	52.42	Neutral	PASS
5	0.4293	38.73	28.63	57.27	47.27		PASS
6	0.1501	57.94	42.83	66.00	56.00		PASS



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



# A.9. Radiated Emission

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

 $E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable loss} [dB] - G_{preamp} [dB]$ 

A<sub>T</sub>: Total correction Factor except Antenna

U<sub>R</sub>: Receiver Reading

G<sub>preamp</sub>: Preamplifier Gain

A<sub>Factor</sub>: Antenna Factor at 3m

During the test, the total correction Factor  $A_T$  and  $A_{Factor}$  were built in test software.

**Note1:** All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

**Note2:** For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

**Note 3:** N/A means the frequency is the basic frequency or the base station frequency, they are no need to verdict.

Frequency	Reading_Peak	Antenna Factor	Path Loss	Final_Peak	Antenna					
(MHz)	$(dB \mu V/m)$	(dB)	(dB)	$(dB \mu  V/m)$	Polarity					
903	78.87	22.2	4.97	106.04	Vertical					
903	81.81	22.2	4.97	108.98	Horizontal					

Field strength of fundamental:

The field strength(the lowest) of fundamenta is more than 20dB higher than the unwanted emissions, in accordance with FCC part 15.215(b).






#### Plot for Channel 1

	atom atom	n do do to io iotic	he war the second	elo elo rículorio is	and the second s	the sto to so so to y	a 110	
Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
903.640	73.21	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1806.867	47.58	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2707.760	50.82	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3613.520	49.70	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7224.560	48.20	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9031.080	53.50	N/A	50.10	74.00	N/A	54.00	Horizontal	PASS
10062.840	50.72	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

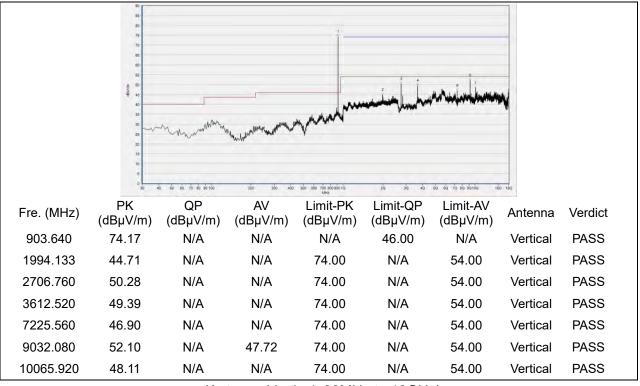

(Antenna Vertical, 30MHz to 18GHz)



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525


Http://www.morlab.cn



#### Plot for Channel 4

	50 5 50 75 70 55 50 75 70 55 50 55 50 50 50 50 50 50 50 50 50 50 50 50 50 50 50 50 50 50 50 5	to to to to to to	way and a so is is		and the second	to to to to to to toto	io tis	
Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
907.850	71.90	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1815.467	45.40	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2723.200	47.94	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3631.800	48.31	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5732.360	47.90	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9077.240	53.62	N/A	51.00	74.00	N/A	54.00	Horizontal	PASS
9985.840	51.92	N/A	47.24	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

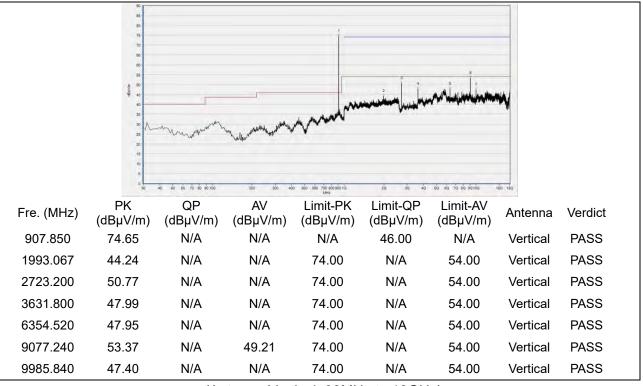

(Antenna Vertical, 30MHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555


Fax: 86-755-36698525

Http://www.morlab.cn






#### Plot for Channel 8

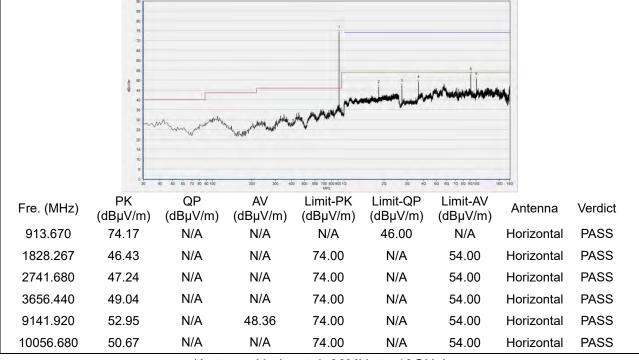

(Antenna Horizontal, 30MHz to 18GHz)

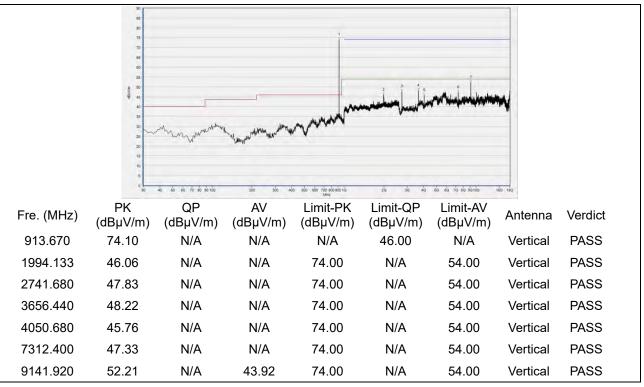

(Antenna Vertical, 30MHz to 18GHz)

#### END OF REPORT



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn E-mail: service@morlab.cn