

FCC Test Report

Product Name : Asset Tracker
Brand Name : Samsara
Model No. : 010-2057, 010-2058, 010-2059
FCC ID : 2AIHD2057

Applicant : SAMSARA NETWORKS INC
Address : 1 De Haro St, San Francisco, CA 94107

Date of Receipt : Aug. 05, 2022
Issued Date : Aug. 31, 2022
Report No. : 2280191R-RFUSBLEV01-A
Report Version : V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

The test report shall not be reproduced except in full without the written approval of DEKRA Testing and Certification Co., Ltd.



Product Name : Asset Tracker
Applicant : SAMSARA NETWORKS INC
Address : 1 De Haro St, San Francisco, CA 94107
Manufacturer : WISTRON NEWEB CORP.
Address : 20 Park Avenue II, Hsinchu Science Park, Hsinchu 308, Taiwan
Brand Name : Samsara
Model No. : 010-2057, 010-2058, 010-2059
FCC ID : 2AIHD2057
EUT Voltage : EUT 1: DC 12V from external power source
DC 3.6V from internal main source of li-ion battery
DC 3.65V from internal second source of li-ion battery
EUT 2: DC 12V from external power source
DC 3.6V from internal main source of li-ion battery
DC 3.65V from internal second source of li-ion battery
EUT 3: DC 4.5V from AA battery (AA battery*3)
Applicable Standard : FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10: 2013
Laboratory Name : DEKRA Testing and Certification Co., Ltd.
Hsin Chu Laboratory
Address : No.372-2, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu
County 310, Taiwan, R.O.C.
Test Result : Complied

Documented By :



(Hailey Peng / Senior Engineer)

Approved By :



(Rueyyan Lin / Supervisor)

The test results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of DEKRA Testing and Certification Co., Ltd.

Revision History

Version	Description	Issued Date
V1.0	Initial issue of report	Aug. 31, 2022

TABLE OF CONTENTS

Description	Page
1. General Information	6
1.1 EUT Description	6
1.2 Test Mode	8
1.3 Comments and Remarks	8
1.4 Tested System Details	9
1.5 Configuration of tested System	9
1.6 EUT Operation of during Test	10
1.7 Test Facility	11
1.8 List of Test Equipment	12
1.9 Measurement Uncertainty	13
1.10 Duty Cycle	14
2. Maximum Conducted Output Power	15
2.1 Test Setup	15
2.2 Test Limit	15
2.3 Test procedures	15
2.4 Test Specification	15
2.5 Test Result of Maximum Conducted Output Power	16
3. Radiated Emission	17
3.1 Test Setup	17
3.2 Test Limit	18
3.3 Test Procedure	19
3.4 Test Specification	19
3.5 Test Result of Radiated Emissions (30 MHz ~ 1 GHz)	20
3.6 Test Result of Radiated Emissions (1 GHz ~ 10 th Harmonic)	25
4. Antenna Port Conducted Emission	28
4.1 Test Setup	28
4.2 Test Limit	28
4.3 Test Procedure	28
4.4 Test Specification	28
4.5 Test Result of Antenna Port Conducted Emission	29
5. Radiated Emission Band Edge	32
5.1 Test Setup	32
5.2 Test Limit	32
5.3 Test Procedure	33
5.4 Test Specification	33
5.5 Test Result of Radiated Emission Band Edge	34
6. Occupied Bandwidth & DTS Bandwidth	40
6.1 Test Setup	40
6.2 Test Limit	40
6.3 Test Procedures	40
6.4 Test Specification	40
6.5 Test Result of Occupied Bandwidth	41

6.6	Test Result of DTS Bandwidth.....	43
7.	Maximum Power Spectral Density	45
7.1	Test Setup.....	45
7.2	Test Limit	45
7.3	Test Procedures.....	45
7.4	Test Specification.....	45
7.5	Test Result of Maximum Power Spectral Density	46
Appendix A		48
☐	Test Setup Photograph	48

1. General Information

1.1 EUT Description

Product Name	Asset Tracker
Brand Name	Samsara
Model No.	010-2057, 010-2058, 010-2059
Frequency Range	1 Mbps: 2402 ~ 2480 MHz 2 Mbps: 2402 ~ 2480 MHz
Channel Number	1 Mbps: 40 Channels 2 Mbps: 40 Channels
Type of Modulation	GFSK

EUT	3	2	1		
Model	010-2057	010-2058	010-2059		
Type	Crevasse*	Serac*	Avalanche*		
Key ICs					
Battery End-of-Service Monitoring	N/A	MAX17260	MAX17260		
CAN transceiver	N/A	MCP25625 or MCP2515	MCP25625 or MCP2515		
ADC Input	N/A	2x	2x		
Output	N/A	1x	1x		
CAN Bus	N/A	N/A	1x		
Power					
Primary Power source	3x Primary Cell L91	EVE	Secondary Cell (Lithium-ion) 18650 pack (3.6V)	EVE	Secondary Cell (Lithium-ion) 18650 pack (3.6V)
		LISON ERGY	Secondary Cell (Lithium-ion) 18650 pack (3.65V)	LISON ERGY	Secondary Cell (Lithium-ion) 18650 pack (3.65V)
External Power source	4.5 VDC	9~36 VDC		9~36 VDC	
Enclosure					
Rough dimensions	81 x 110 x 31 mm	124 x 81 x 35 mm		124 x 81 x 35 mm	
LTEAntenna	Monopole Antenna (Antenna-AG51)	Monopole Antenna (Antenna-AG52/AG53)		Monopole Antenna (Antenna-AG52/AG53)	
Ambient Temp Rating	-40℃~+60℃	-20℃~+60℃		-20℃~+60℃	
Screw	Phillips	Hexalobular socket		Hexalobular socket	
The manufacturer declares that RF-related parts and software are unchanged for three models.					

The EUT 1 (model: 010-2059) and EUT 2 (model: 010-2058) has two sources of battery for marketing:

Sources of Battery	Main Source	Second Source
Brand Name	EVE	LISONERGY
Model No.	A0679B	LS.11110D01
Nominal Voltage	3.6V	3.65V
Typical Capacity	3100mAh	3000mAh
MAX Charge Current	3.1A	0.9A
Typical Over Charge	4.28V	4.275V
Typical Over Charge Release	4.080V	4.075V
Typical Over Charge Delay Time	1.2s	1s
Typical Over Discharge	2.3V	2.5V
Typical Over Discharge Release	2.3V	2.9V
Typical Over Discharge Delay Time	150ms	128ms

Antenna Information				
Ant.	Brand Name	Model No.	Type	Antenna Gain (dBi)
0	WNC	Antenna-BT/WLAN	PCB	3

EUT Operational Condition		
Testing Voltage	EUT 1 and EUT 2	DC 12V
	EUT 3	DC 4.5V

GFSK (1 Mbps/2 Mbps)

Working Frequency of Each Channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	10	2422 MHz	20	2442 MHz	30	2462 MHz
01	2404 MHz	11	2424 MHz	21	2444 MHz	31	2464 MHz
02	2406 MHz	12	2426 MHz	22	2446 MHz	32	2466 MHz
03	2408 MHz	13	2428 MHz	23	2448 MHz	33	2468 MHz
04	2410 MHz	14	2430 MHz	24	2450 MHz	34	2470 MHz
05	2412 MHz	15	2432 MHz	25	2452 MHz	35	2472 MHz
06	2414 MHz	16	2434 MHz	26	2454 MHz	36	2474 MHz
07	2416MHz	17	2436 MHz	27	2456 MHz	37	2476 MHz
08	2418 MHz	18	2438 MHz	28	2458 MHz	38	2478 MHz
09	2420 MHz	19	2440 MHz	29	2460 MHz	39	2480 MHz

Note:

1. Regards to the frequency band operation; the lowest , middle and highest frequency of channel were selected to perform the test, and then shown on this report.
2. The above EUT information is declared by the manufacturer.

1.2 Test Mode

DEKRA has verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Test Mode	Mode 1: EUT 1 with main source of battery Mode 2: EUT 1 with second source of battery Mode 3: EUT 2 with main source of battery Mode 4: EUT 2 with second source of battery Mode 5: EUT 3 with AA battery
	Mode 1 generated the worst test result for radiated emission below 1GHz test, thus the measurement for other test items will follow this same test configuration.

Test Items	Test Mode	Modulation	Channel	Result
AC Power Line Conducted Emission	The EUT was DC-powered, it's not necessary to apply to AC power line conducted emission test.			
Maximum Conducted Output Power	Mode 1	GFSK (1 Mbps)	00/19/39	Pass
		GFSK (2 Mbps)	00/19/39	Pass
Radiated Emission Below 1 GHz	Mode 1	GFSK (1 Mbps)	39	Pass
	Mode 2	GFSK (1 Mbps)	39	Pass
	Mode 3	GFSK (1 Mbps)	39	Pass
	Mode 4	GFSK (1 Mbps)	39	Pass
	Mode 5	GFSK (1 Mbps)	39	Pass
Radiated Emission Above 1 GHz	Mode 1	GFSK (1 Mbps)	00/19/39	Pass
		GFSK (2 Mbps)	00/19/39	Pass
Antenna Port Conducted Emission	Mode 1	GFSK (1 Mbps)	00/19/39	Pass
		GFSK (2 Mbps)	00/19/39	Pass
Radiated Emission Band Edge	Mode 1	GFSK (1 Mbps)	00/19/39	Pass
		GFSK (2 Mbps)	00/19/39	Pass
Occupied Bandwidth & DTS Bandwidth	Mode 1	GFSK (1 Mbps)	00/19/39	Pass
		GFSK (2 Mbps)	00/19/39	Pass
Maximum Power Spectral Density	Mode 1	GFSK (1 Mbps)	00/19/39	Pass
		GFSK (2 Mbps)	00/19/39	Pass

Note:

1. Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
2. For radiated emission below 1 GHz have performed all modes of operation were investigated and the worst-case emissions are reported.
3. The EUT was performed at X axis, Y axis and Z axis position for radiated emission and band edge tests. The worst case was found at Y axis, so the measurement will follow this same test configuration.

1.3 Comments and Remarks

The product specification and testing instructions for the EUT declared in the report are provided by the manufacturer who will take all responsibilities for the accuracy.

1.4 Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system.


For EUT 1 and EUT 2:


	Product	Manufacturer	Model No.	Serial No.
1	Fixture	Oneping	OP-1010C18V-PBAM04D1	N/A
2	Notebook	DELL	Latitude E6320	8611271467
3	Power Supply	Topward	6303D	8095908

For EUT 3:

	Product	Manufacturer	Model No.	Serial No.
1	Fixture	Oneping	OP-1010C18V-PBAM04D1	N/A
2	Notebook	DELL	Latitude E6320	8611271467

1.5 Configuration of tested System

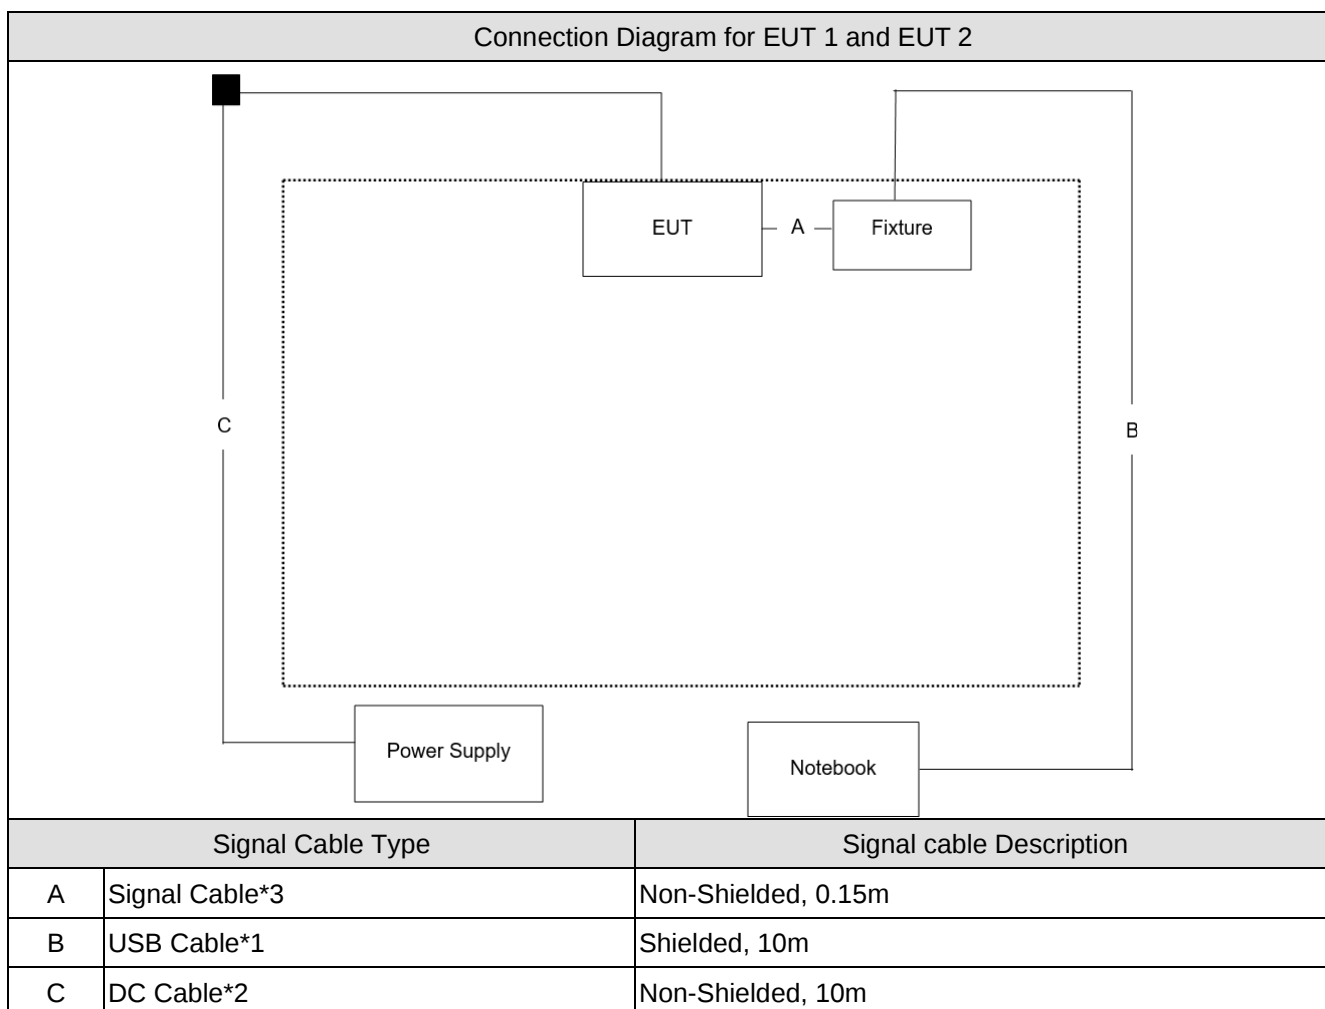

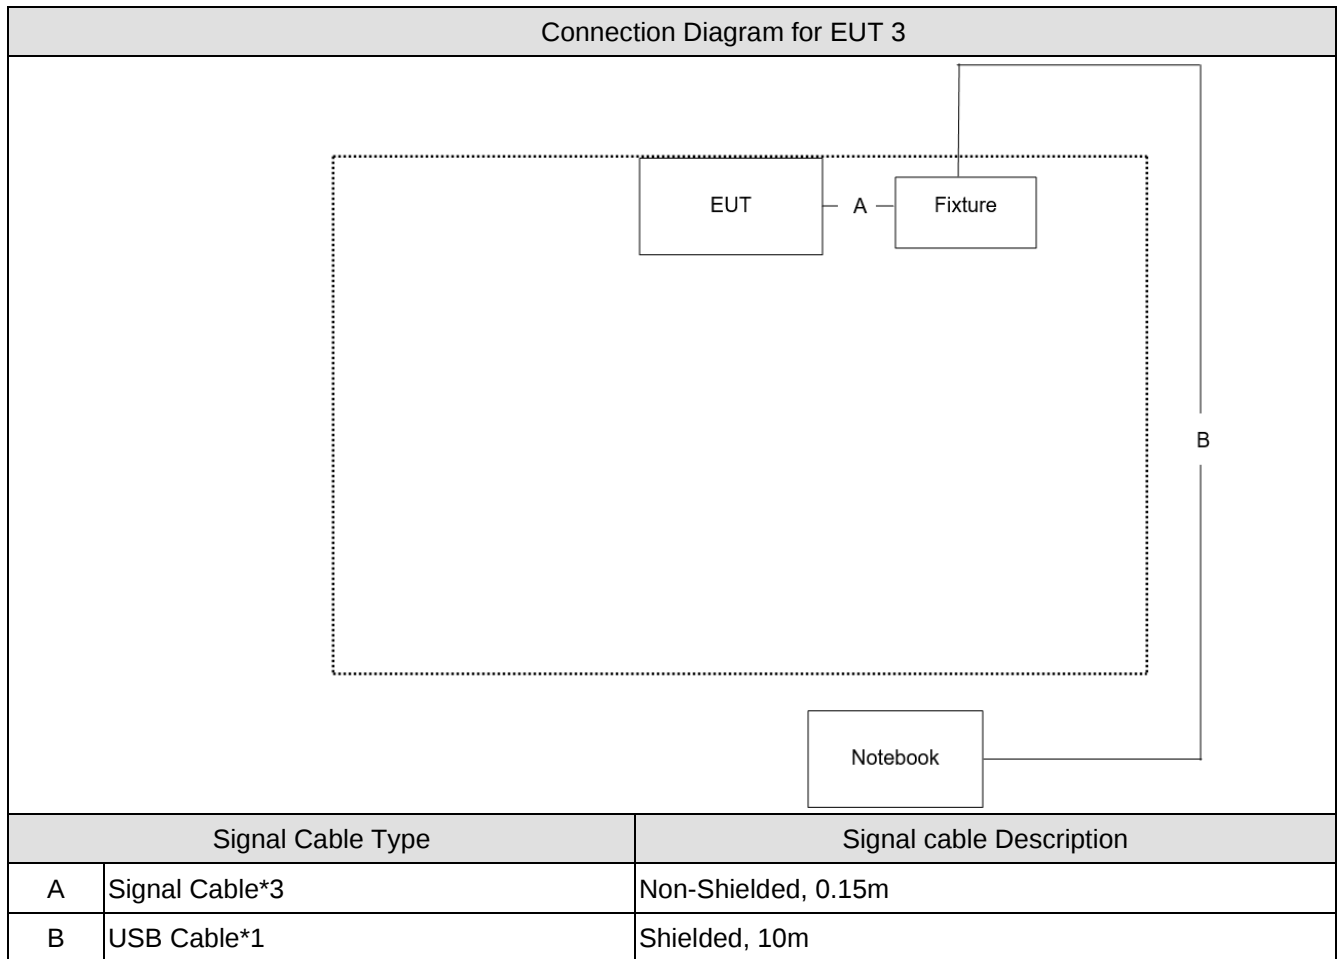

1.6 EUT Operation of during Test

1	Execute control command by software "Putty".
2	Configure the test mode, the test channel, and the data rate.
3	Press "Start TX" to start the continuous transmitting.
4	Verify that the EUT works properly.

1.7 Test Facility

Ambient conditions in the laboratory:

Items	Test Item	Actually	Tested by	Test Date	Test Site
Temperature (°C)	Maximum Peak Conducted	23	Clemens Fang	2022/08/23	HC-SR12
Humidity (%RH)	Output Power	65			
Temperature (°C)	Radiated Emission	22 ~ 23	Cyril Chen	2022/08/15 ~ 2022/08/23	HC-CB04
Humidity (%RH)		58 ~ 63			
Temperature (°C)	Antenna Port Conducted Emission	23	Clemens Fang	2022/08/23	HC-SR12
Humidity (%RH)		65			
Temperature (°C)	Radiated Emission Band Edge	22 ~ 23	Cyril Chen	2022/08/15 ~ 2022/08/19	HC-CB04
Humidity (%RH)		58 ~ 59			
Temperature (°C)	Occupied Bandwidth &	23	Clemens Fang	2022/08/23	HC-SR12
Humidity (%RH)	DTS Bandwidth	65			
Temperature (°C)	Maximum Power Spectral Density	23	Clemens Fang	2022/08/23	HC-SR12
Humidity (%RH)		65			

Note: Test site information refers to Laboratory Information.

Laboratory Information

USA : FCC Registration Number: TW3024
Canada : CAB identifier : TW3024

The address and introduction of DEKRA Testing and Certification Co., Ltd. laboratories can be founded in our Web site: <http://www.dekra.com.tw>

If you have any comments, please don't hesitate to contact us. Our test sites as below:

Test Laboratory	DEKRA Testing and Certification Co., Ltd.
Address	1. No.372-2, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County 31061, Taiwan, R.O.C. 2. No.372, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County 31061, Taiwan, R.O.C.
Phone number	1. +886-3-582-8001 2. +886-3-582-8001
Fax number	1. +886-3-582-8958 2. +886-3-582-8958
Email address	info.tw@dekra.com
Website	http://www.dekra.com.tw
Note: Test site number for address 1 includes HC-SR02. Test site number for address 2 includes HC-CB02, HC-CB03, HC-CB04, HC-SR10 and HC-SR12.	

1.8 List of Test Equipment

HC-SR12

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
High Speed Peak Power Meter Dual Input	Anritsu	ML2496A	1602004	2021/11/12	2022/11/11
Pulse Power Sensor	Anritsu	MA2411B	1531043	2021/11/12	2022/11/11
EXA Signal Analyzer	Keysight	N9010A	MY51440132	2022/01/07	2023/01/06
Pulse Power Sensor	Anritsu	MA2411B	1531044	2021/11/12	2022/11/11
Power Meter	Keysight	8990B	MY51000248	2022/05/06	2023/05/05
Power Sensor	Keysight	N1923A	MY57240005	2022/05/06	2023/05/05
Signal & Spectrum Analyzer	R&S	FSV40	101049	2022/04/25	2023/04/24

HC-CB04

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Signal Analyzer	R&S	FSVA40	101455	2021/10/22	2022/10/21
EXA Signal Analyzer	Keysight	N9010A	MY51440132	2022/01/07	2023/01/06
Trilog Broadband Antenna	Schwarzbeck	VULB 9168	1209	2022/06/14	2023/06/13
Horn Antenna	Schwarzbeck	BBHA 9120D	01640	2022/07/13	2023/07/12
Horn Antenna	Schwarzbeck	BBHA 9170	203	2022/02/23	2023/02/22
Pre-Amplifier	EMCI	EMC01820I	980364	2022/06/10	2023/06/09
Pre-Amplifier	EMEC	EM01G18GA	060835	2022/07/04	2023/07/03
Pre-Amplifier	DEKRA	AP-400C	201801231	2021/12/24	2022/12/23
EMI Test Receiver	R&S	ESR7	102260	2021/12/22	2022/12/21
Magnetic Loop Antenna	Teseq	HLA 6121	44287	2021/09/06	2022/09/05
Coaxial Cable(10m)	Suhner	SF102_SF104	HC-CB04	2022/08/08	2023/08/07
Coaxial Cable(3m)	Suhner,Rosnol	SF102_UP0264	HC-CB04_1	2022/08/14	2023/08/13
Radiated Software	AUDIX	e3 V9	HC-CB04_1	N/A	N/A

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

1.9 Measurement Uncertainty

Uncertainties have been calculated according to the DEKRA internal document with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$)).

Test item	Uncertainty
Maximum Conducted Output Power	± 1.16 dB
Radiated Emission	± 3.25 dB below 1 GHz ± 3.32 dB above 1 GHz
Antenna Port Conducted Emission	± 1.60 dB
Radiated Emission Band Edge	± 3.32 dB
Occupied Bandwidth & DTS Bandwidth	± 282.55 Hz
Maximum Power Spectral Density	± 1.60 dB


1.10 Duty Cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
GFSK (1 Mbps)	2.110	3.500	60.29	2.20	0.474
GFSK (2 Mbps)	1.060	1.760	60.23	2.20	0.943



2. Maximum Conducted Output Power

2.1 Test Setup

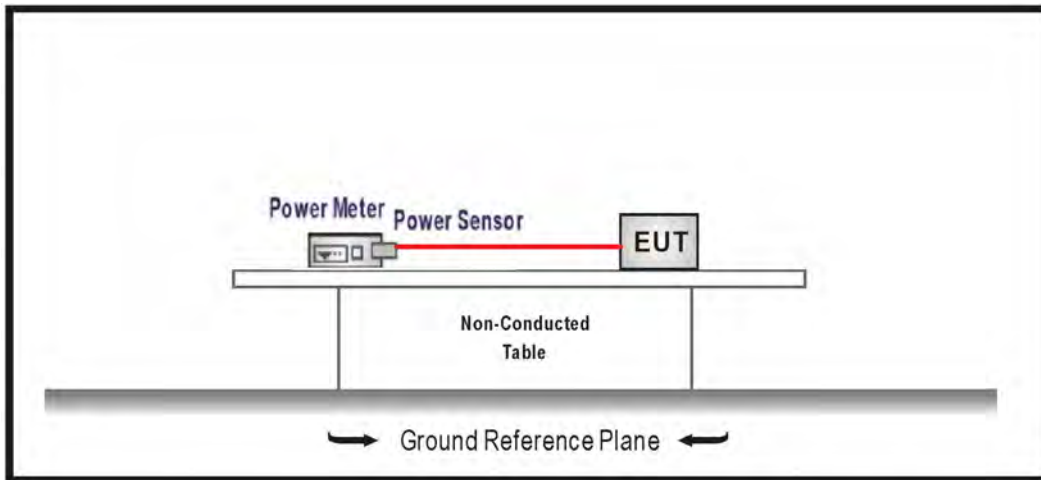

2.2 Test Limit

The Maximum Conducted Output Power shall be less 1 Watt.

2.3 Test procedures

The EUT was setup according to ANSI C63.10: 2013; tested according to DTS test procedure of KDB 558074 D01 v05r02 for compliance to FCC 47CFR 15.247 requirements.

2.4 Test Specification

According to FCC Part 15 Subpart C Paragraph 15.247.

2.5 Test Result of Maximum Conducted Output Power


Mode 1: EUT 1 with main source of battery

Modulation	Channel	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
GFSK (1 Mbps)	00	2402	16.870	≤ 30.00	Pass
	19	2440	19.920	≤ 30.00	Pass
	39	2480	18.440	≤ 30.00	Pass
GFSK (2 Mbps)	00	2402	16.970	≤ 30.00	Pass
	19	2440	19.990	≤ 30.00	Pass
	39	2480	3.370	≤ 30.00	Pass


3. Radiated Emission

3.1 Test Setup


9 kHz ~ 30 MHz

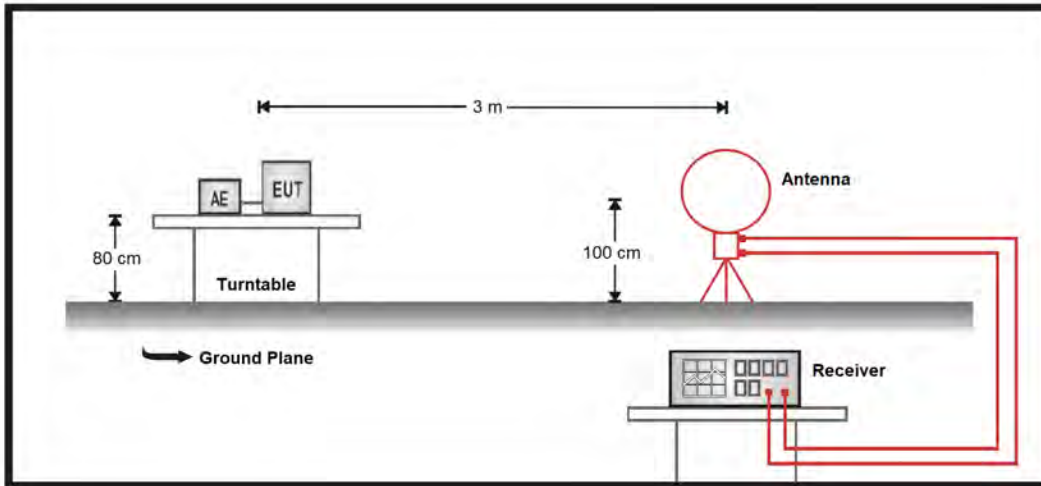

30 MHz ~ 1 GHz

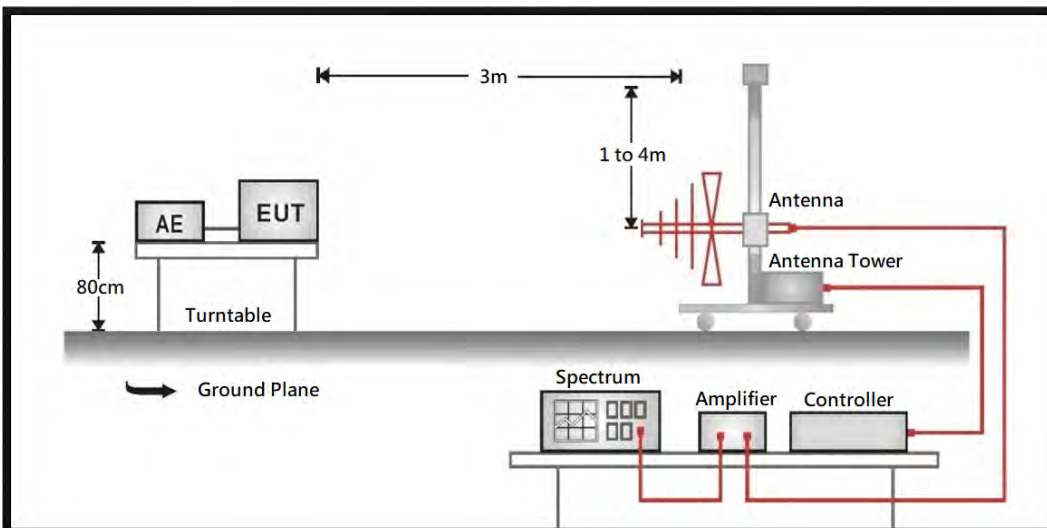

Above 1 GHz

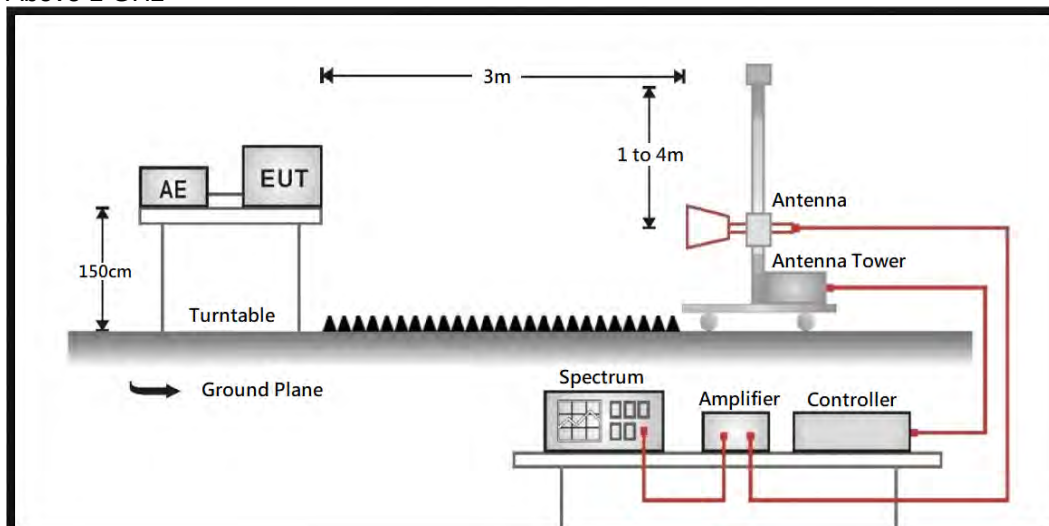

3.2 Test Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20 dB below the level of the fundamental or to the general radiated emission limit in paragraph 15.209, whichever is the lesser attenuation.

Frequency (MHz)	Field strength (uV/m)	Field strength (dBuV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	20 log (2400/F(kHz))	300
0.490 – 1.705	24000/F(kHz)	20 log (24000/F(kHz))	30
1.705 - 30	30	29.5	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

Remarks:

1. Field strength (dBuV/m) = 20 log Field strength (uV/m)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

3.3 Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to DTS test procedure of KDB 558074 D01V05r02 for compliance to FCC 47CFR 15.247 requirements.

The EUT and its simulators are placed on a turn table which is 0.8 or 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

On any frequency or frequencies from 9 kHz(include The the lowest oscillator frequency generated within the device up to the 10th harmonic) to 1000 MHz, the limit shown are based on measuring equipment employing a quasi-peak detector function and on any frequency or frequencies above 1000 MHz the radiated limit shown are based upon the use of measurement instrumentation employing an average detector function. When average radiated emission measurement are included emission measurement below 1000 MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

The bandwidth below 1 GHz setting on the field strength meter is 120 kHz and above 1 GHz is 1MHz.


3.4 Test Specification

According to FCC Part 15 Subpart C Paragraph 15.247.

3.5 Test Result of Radiated Emissions (30 MHz ~ 1 GHz)

Mode 1: EUT 1 with main source of battery

Site :HC-CB04
Condition :3m Horizontal
Mode :BLE_1M_TX_2480MHz
Test By :Cyril

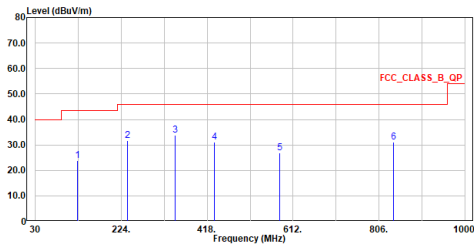


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	125.060	23.81	43.50	-19.69	28.55	-4.74	QP
2	237.774	31.78	46.00	-14.22	36.51	-4.73	QP
3	345.929	33.68	46.00	-12.32	35.04	-1.36	QP
4	434.587	31.22	46.00	-14.78	29.97	1.25	QP
5	581.736	26.92	46.00	-19.08	22.56	4.36	QP
6	838.592	31.02	46.00	-14.98	22.57	8.45	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m Vertical
Mode :BLE_1M_TX_2480MHz
Test By :Cyril

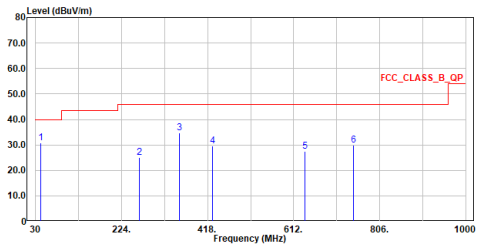


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	42.707	30.84	40.00	-9.16	32.94	-2.10	QP
2	264.837	25.10	46.00	-20.90	28.61	-3.51	QP
3	354.271	34.72	46.00	-11.28	35.87	-1.15	QP
4	429.155	29.71	46.00	-16.29	28.69	1.02	QP
5	637.317	27.50	46.00	-18.50	21.77	5.73	QP
6	746.442	29.95	46.00	-16.05	22.40	7.55	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Mode 2: EUT 1 with second source of battery


Site :HC-CB04
Condition :3m Horizontal
Mode :BLE_1M_TX_2480MHz
Test By :Cyril

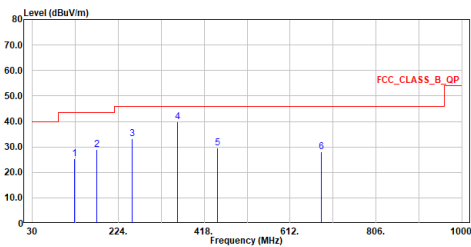

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m Vertical
Mode :BLE_1M_TX_2480MHz
Test By :Cyril

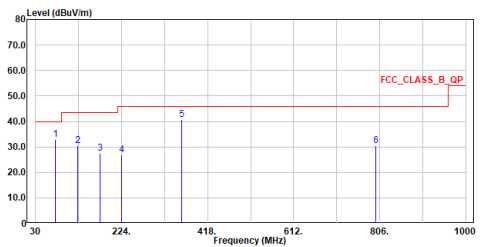


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Mode 3: EUT 2 with main source of battery

Site :HC-CB04
 Condition :3m Horizontal
 Mode :BLE_1M_TX_2480MHz
 Test By :Cyril

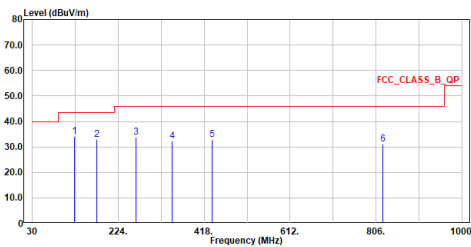


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	125.060	34.05	43.50	-9.45	30.79	-4.74	QP
2	175.015	32.85	43.50	-10.65	36.56	-3.71	QP
3	263.867	33.67	46.00	-12.33	37.28	-3.61	QP
4	345.153	32.17	46.00	-13.83	33.55	-1.38	QP
5	435.460	32.86	46.00	-13.14	31.56	1.30	QP
6	821.520	31.01	46.00	-14.99	22.81	8.20	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m Vertical
 Mode :BLE_1M_TX_2480MHz
 Test By :Cyril

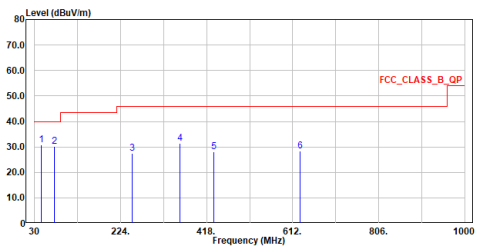


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	44.744	30.73	40.00	-9.27	33.11	-2.38	QP
2	75.008	30.28	40.00	-9.72	36.10	-5.82	QP
3	249.996	27.47	46.00	-18.53	31.72	-4.25	QP
4	358.248	31.28	46.00	-14.72	32.35	-1.07	QP
5	433.714	28.20	46.00	-17.80	26.98	1.22	QP
6	628.005	28.39	46.00	-17.61	22.92	5.47	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Mode 4: EUT 2 with second source of battery

Site :HC-CB04
 Condition :3m Horizontal
 Mode :BLE_1M_TX_2480MHz
 Test By :Cyril

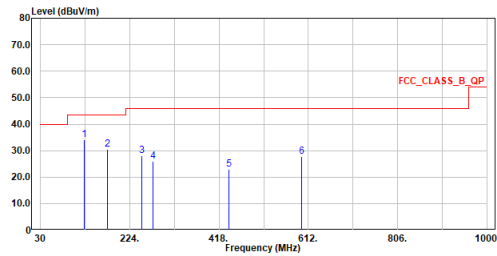


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	125.060	34.02	43.50	-9.48	38.76	-4.74	QP
2	175.015	30.53	43.50	-12.97	34.24	-3.71	QP
3	249.996	28.08	46.00	-17.92	32.33	-4.25	QP
4	275.022	25.90	46.00	-20.10	28.96	-3.06	QP
5	439.631	23.01	46.00	-22.99	21.53	1.48	QP
6	597.353	27.78	46.00	-18.22	22.74	5.04	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m Vertical
 Mode :BLE_1M_TX_2480MHz
 Test By :Cyril

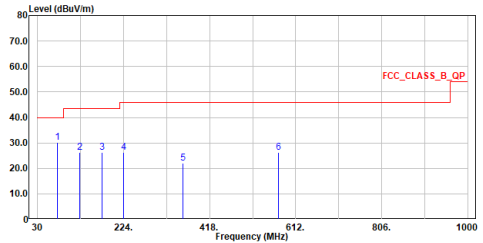


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	75.008	30.31	40.00	-9.69	36.13	-5.82	QP
2	125.060	26.41	43.50	-17.09	31.15	-4.74	QP
3	175.015	26.27	43.50	-17.23	29.98	-3.71	QP
4	224.970	26.35	46.00	-19.65	32.50	-6.15	QP
5	357.278	22.09	46.00	-23.91	23.17	-1.08	QP
6	572.618	26.25	46.00	-19.75	22.19	4.06	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Mode 5: EUT 3 with AA battery

Site :HC-CB04
 Condition :3m Horizontal
 Mode :BLE_1M_TX_2480MHz
 Test By :Cyril

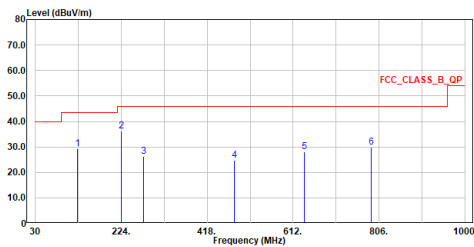


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	125.060	29.14	43.50	-14.36	33.88	-4.74	QP
2	224.970	36.29	46.00	-9.71	42.44	-6.15	QP
3	275.022	26.15	46.00	-19.85	29.21	-3.06	QP
4	480.080	24.80	46.00	-21.20	22.57	2.23	QP
5	637.317	28.18	46.00	-17.82	22.45	5.73	QP
6	788.734	29.85	46.00	-16.15	21.98	7.87	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m Vertical
 Mode :BLE_1M_TX_2480MHz
 Test By :Cyril

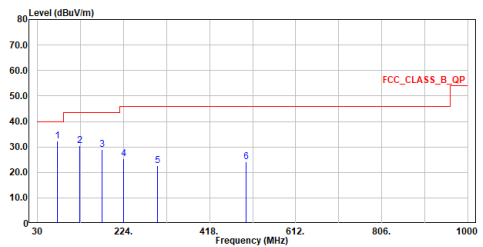

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	75.008	32.24	40.00	-7.76	38.06	-5.82	QP
2	125.060	30.40	43.50	-13.10	35.14	-4.74	QP
3	175.015	28.97	43.50	-14.53	32.68	-3.71	QP
4	224.970	25.28	46.00	-20.72	31.43	-6.15	QP
5	300.048	22.63	46.00	-23.37	25.10	-2.47	QP
6	500.353	24.29	46.00	-21.71	21.68	2.61	QP


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

3.6 Test Result of Radiated Emissions (1 GHz ~ 10th Harmonic)

Mode 1: EUT 1 with main source of battery

Site :HC-CB04
Condition :3m ,Horizontal
Mode :BLE_1M_TX_2402MHz
Test By :Cyril

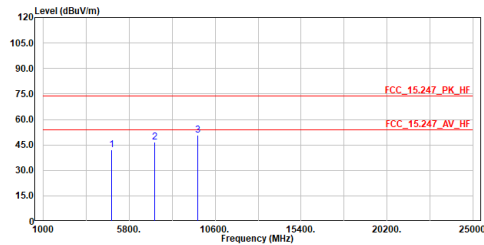


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	4804.000	41.99	74.00	-32.01	58.56	-16.57	Peak
2	7206.000	46.58	74.00	-27.42	57.34	-10.76	Peak
3	9608.000	50.56	74.00	-23.44	55.85	-5.29	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :BLE_1M_TX_2402MHz
Test By :Cyril

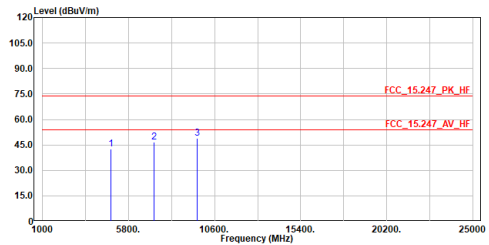


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	4804.000	42.37	74.00	-31.63	58.94	-16.57	Peak
2	7206.000	46.57	74.00	-27.43	57.33	-10.76	Peak
3	9608.000	48.88	74.00	-25.12	54.17	-5.29	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :BLE_1M_TX_2440MHz
Test By :Cyril

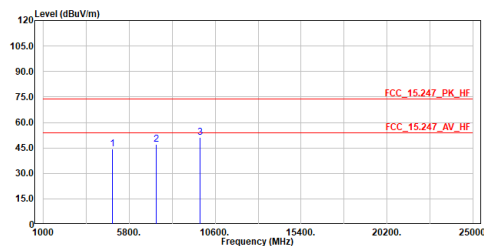


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	4880.000	44.43	74.00	-29.57	60.86	-16.43	Peak
2	7320.000	47.07	74.00	-26.93	57.86	-10.79	Peak
3	9760.000	51.38	74.00	-22.62	56.21	-4.83	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :BLE_1M_TX_2440MHz
Test By :Cyril

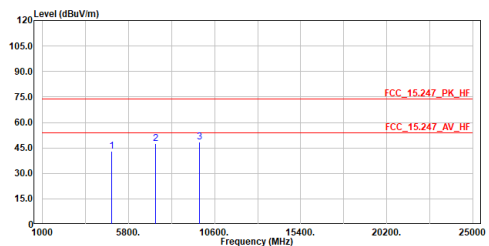


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	4880.000	43.10	74.00	-30.90	59.53	-16.43	Peak
2	7320.000	47.43	74.00	-26.57	58.22	-10.79	Peak
3	9760.000	48.59	74.00	-25.41	53.42	-4.83	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :BLE_1M_TX_2480MHz
Test By :Cyril

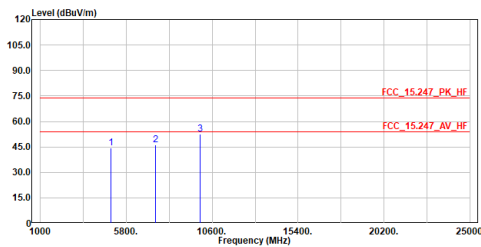


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4960.000	44.36	74.00	-29.64	60.69	-16.33	Peak
2	7440.000	46.33	74.00	-27.67	56.82	-10.49	Peak
3	9920.000	52.62	74.00	-21.38	57.34	-4.72	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :BLE_1M_TX_2480MHz
Test By :Cyril

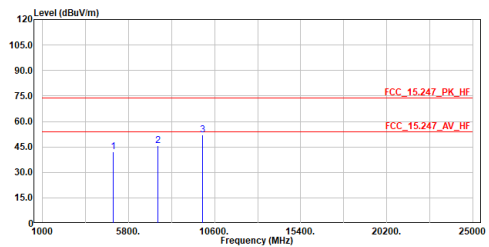


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4960.000	42.30	74.00	-31.70	58.63	-16.33	Peak
2	7440.000	45.56	74.00	-28.44	56.05	-10.49	Peak
3	9920.000	52.29	74.00	-21.71	57.01	-4.72	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :BLE_2M_TX_2402MHz
Test By :Cyril

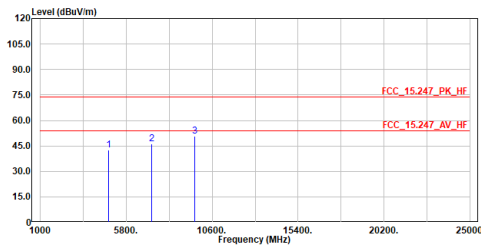


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4804.000	42.38	74.00	-31.62	58.95	-16.57	Peak
2	7206.000	46.39	74.00	-27.61	57.15	-10.76	Peak
3	9608.000	50.89	74.00	-23.11	56.18	-5.29	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :BLE_2M_TX_2402MHz
Test By :Cyril

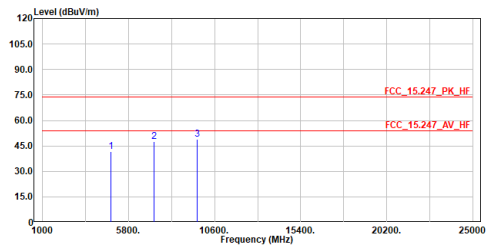


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4804.000	41.66	74.00	-32.34	58.23	-16.57	Peak
2	7206.000	47.70	74.00	-26.30	58.46	-10.76	Peak
3	9608.000	48.75	74.00	-25.25	54.04	-5.29	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :BLE_2M_TX_2440MHz
Test By :Cyril

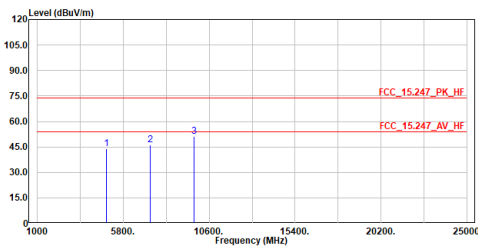


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4880.000	43.87	74.00	-30.13	60.30	-16.43	Peak
2	7320.000	46.40	74.00	-27.60	57.19	-10.79	Peak
3	9760.000	51.08	74.00	-22.92	55.91	-4.83	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :BLE_2M_TX_2440MHz
Test By :Cyril

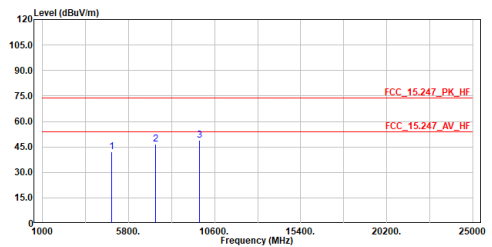


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4880.000	42.20	74.00	-31.80	58.63	-16.43	Peak
2	7320.000	46.53	74.00	-27.47	57.32	-10.79	Peak
3	9760.000	48.84	74.00	-25.16	53.67	-4.83	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :BLE_2M_TX_2480MHz
Test By :Cyril

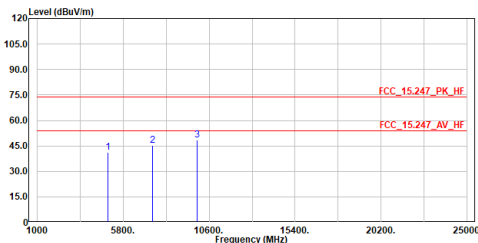


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4960.000	41.32	74.00	-32.68	57.65	-16.33	Peak
2	7440.000	45.50	74.00	-28.50	55.99	-10.49	Peak
3	9920.000	48.48	74.00	-25.52	53.20	-4.72	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :BLE_2M_TX_2480MHz
Test By :Cyril

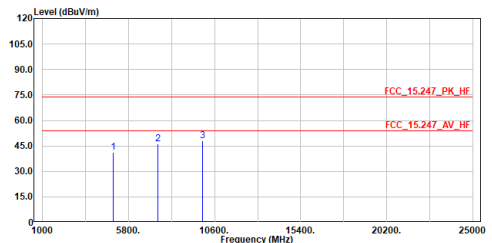


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4960.000	41.07	74.00	-32.93	57.40	-16.33	Peak
2	7440.000	46.29	74.00	-27.71	56.78	-10.49	Peak
3	9920.000	47.87	74.00	-26.13	52.59	-4.72	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

4. Antenna Port Conducted Emission

4.1 Test Setup

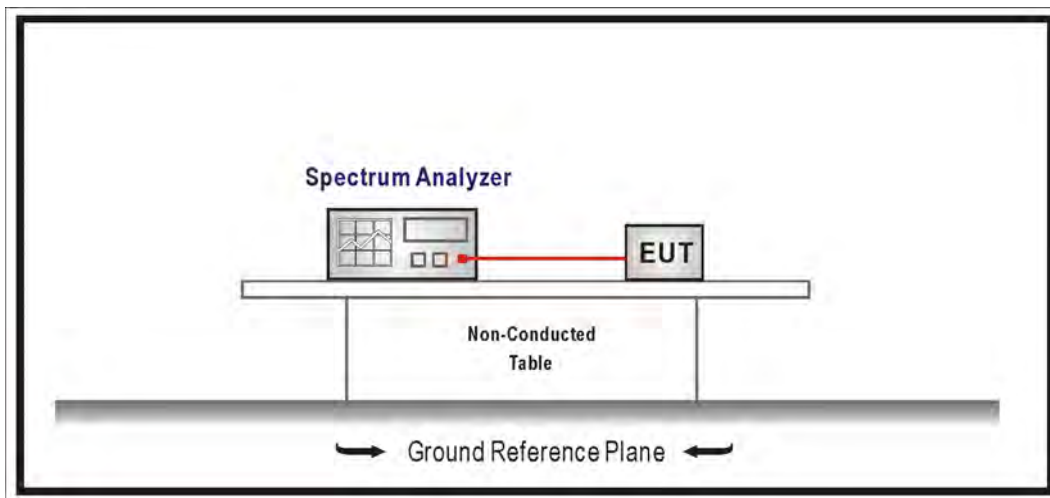

4.2 Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limit. If the transmitter complies with the conducted power limit based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limit specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limit specified in §15.209(a) (see §15.205(c)).

4.3 Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to DTS test procedure of KDB 558074 D01 V05r02 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 100 kHz, Set VBW > RBW, scan up through 10th harmonic.


4.4 Test Specification

According to FCC Part 15 Subpart C Paragraph 15.247.


4.5 Test Result of Antenna Port Conducted Emission

Mode 1: EUT 1 with main source of battery


GFSK (1 Mbps) / 2402 MHz

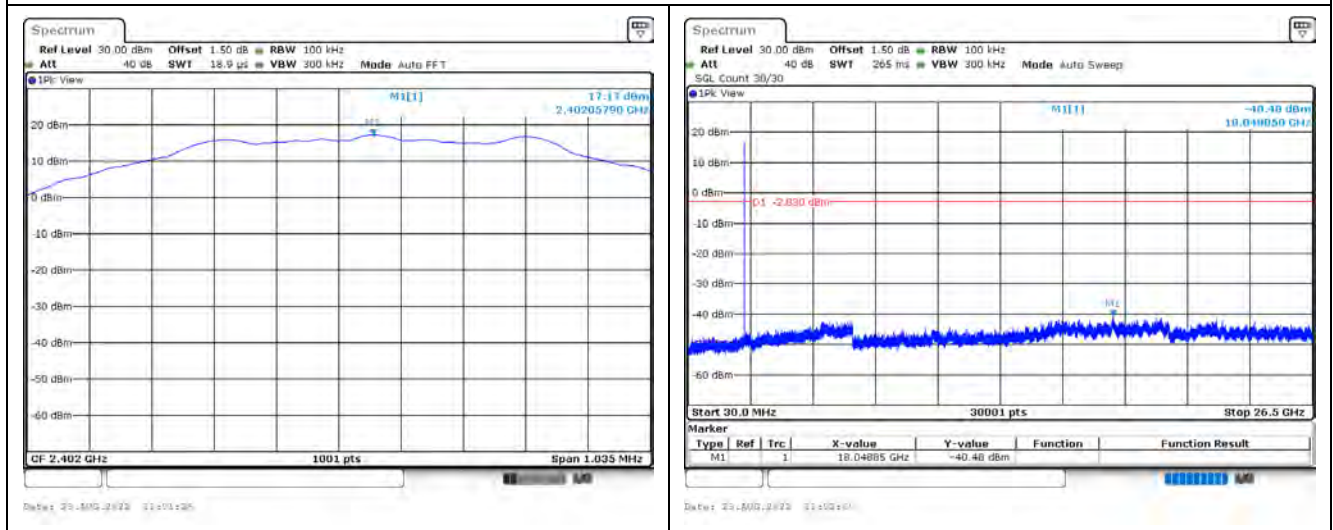


GFSK (1 Mbps) / 2440 MHz

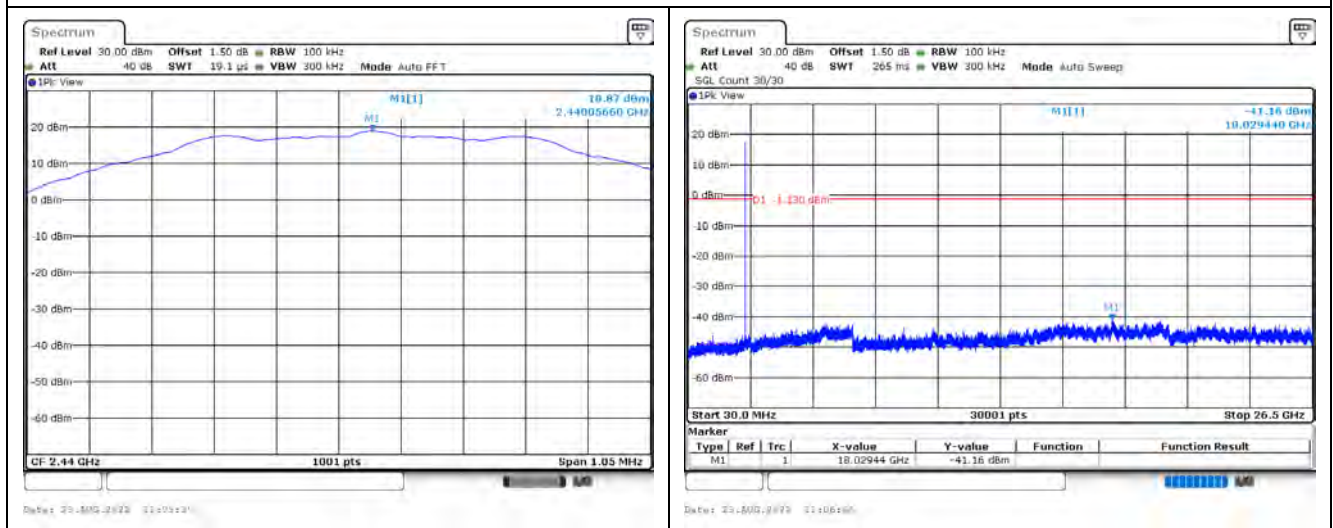


GFSK (1 Mbps) / 2480 MHz

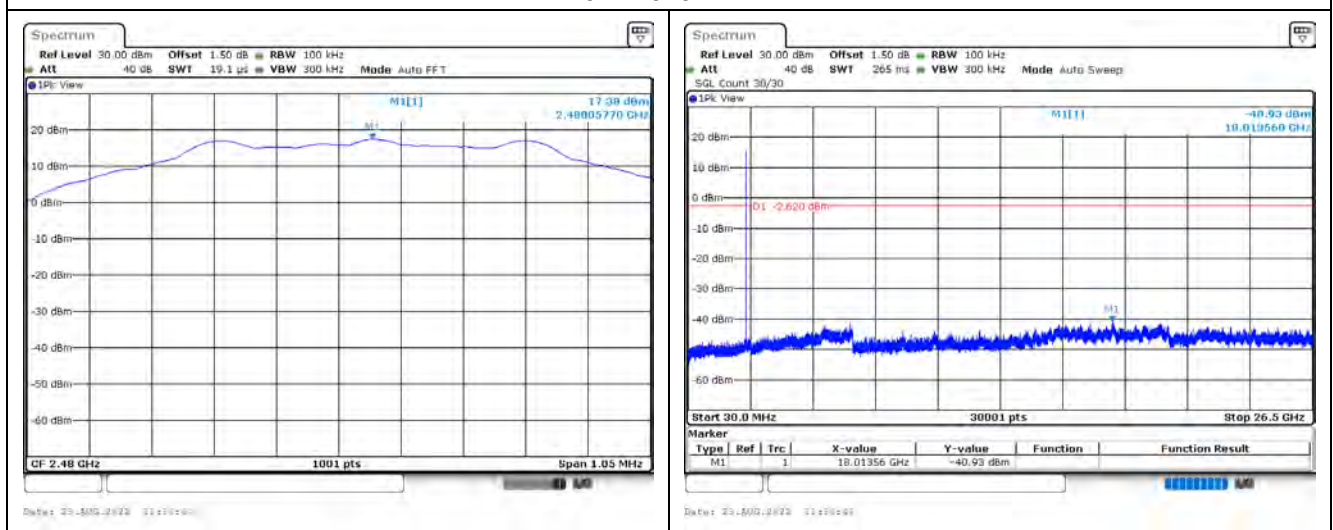


GFSK (2 Mbps) / 2402 MHz




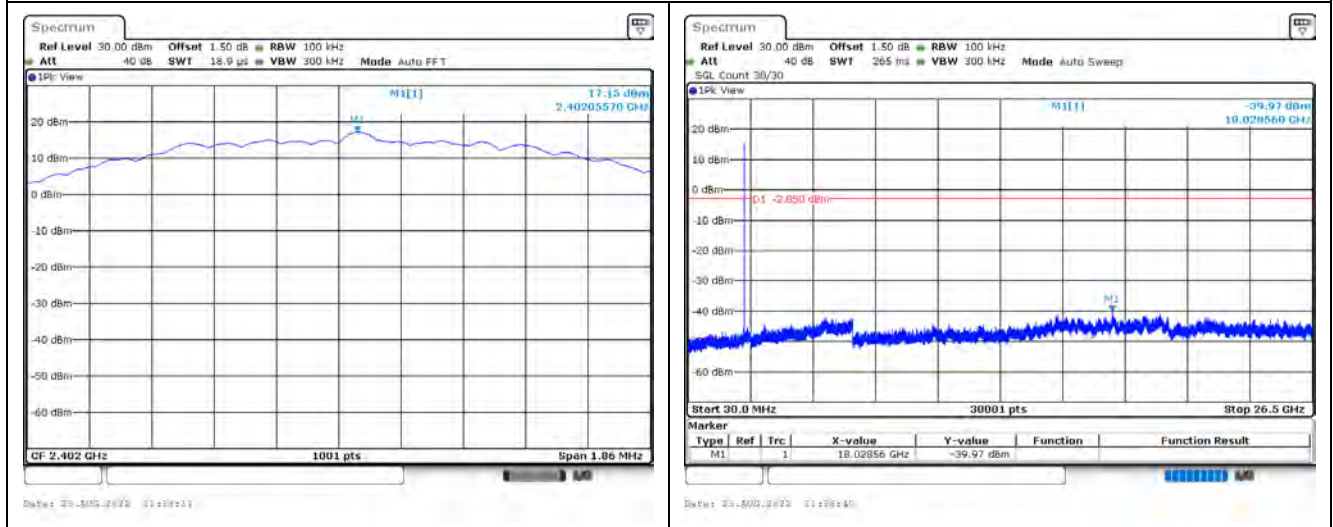


GFSK (2 Mbps) / 2440 MHz

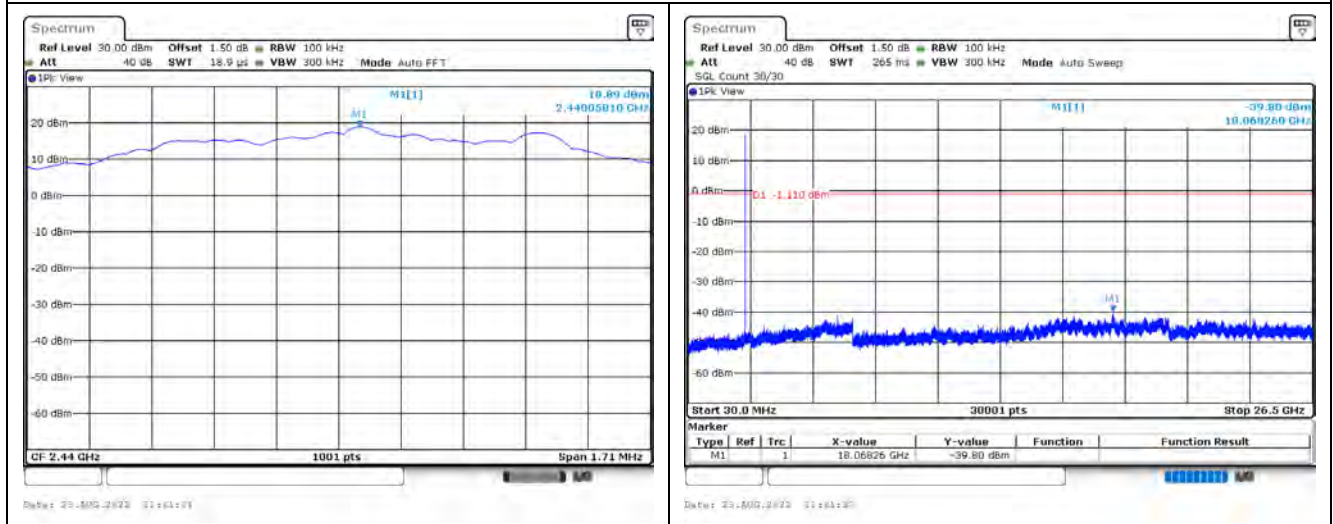


GFSK (2 Mbps) / 2480 MHz

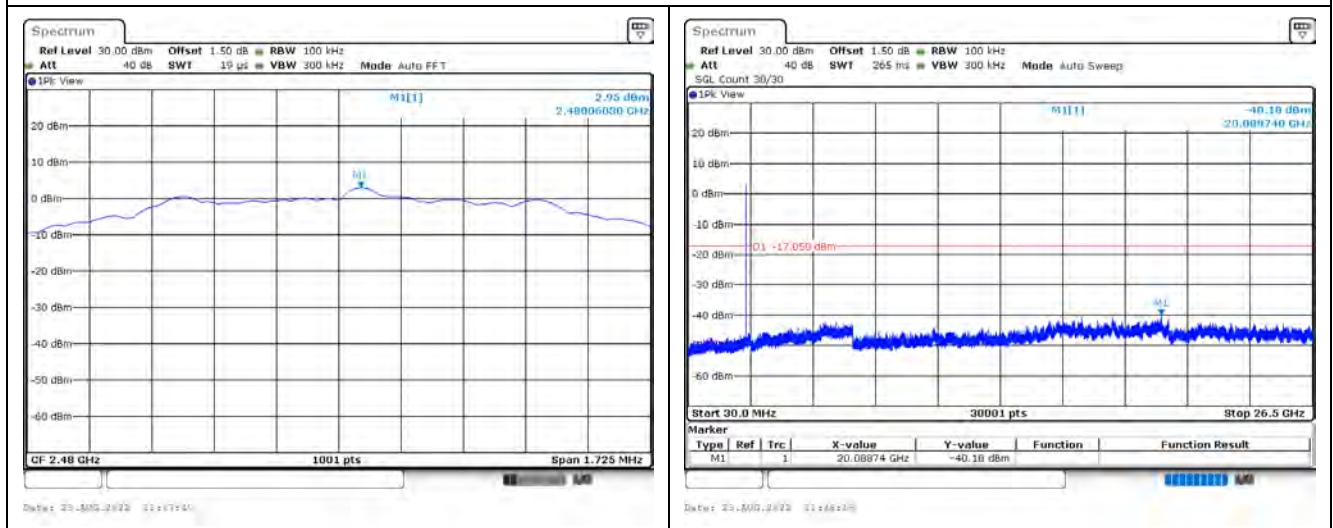

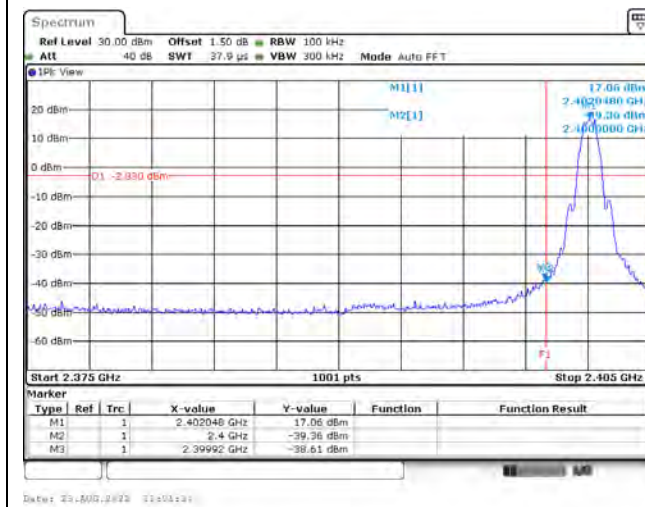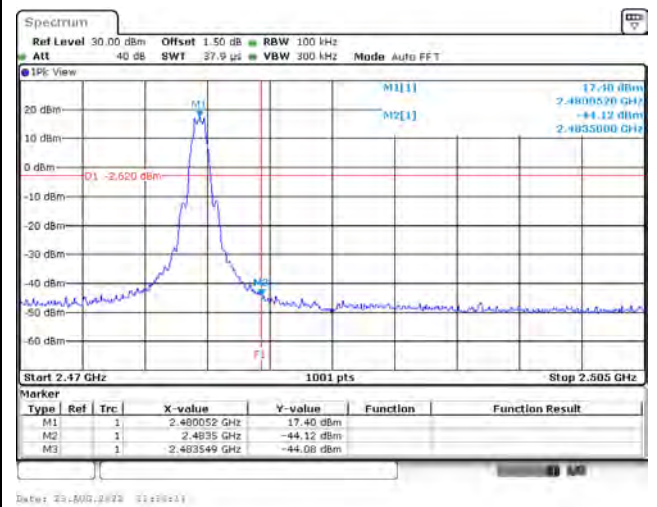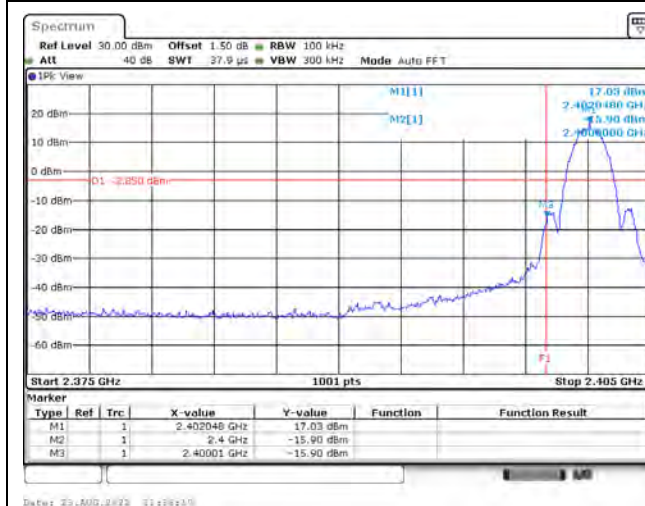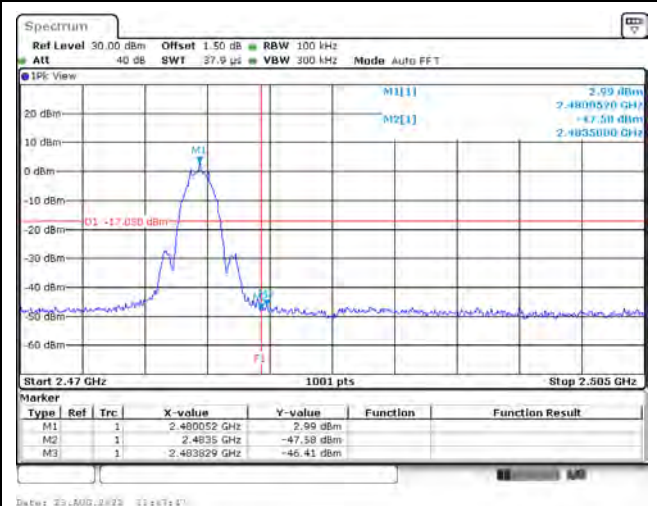GFSK (1 Mbps) / 2402 MHz (Band Edge)**GFSK (1 Mbps) / 2480 MHz (Band Edge)****GFSK (2 Mbps) / 2402 MHz (Band Edge)****GFSK (2 Mbps) / 2480 MHz (Band Edge)**

5. Radiated Emission Band Edge

5.1 Test Setup

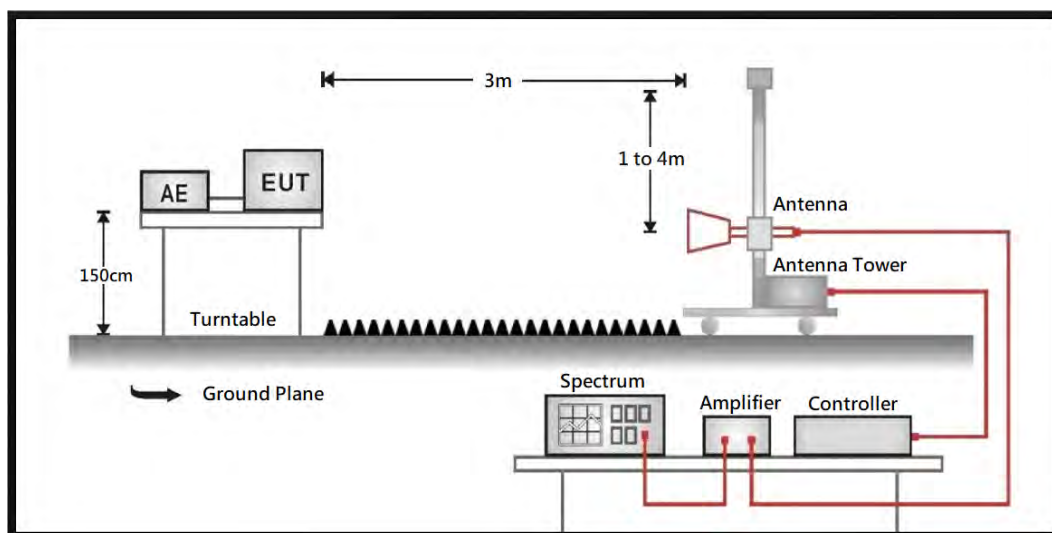

5.2 Test Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20 dB below the level of the fundamental or to the general radiated emission limit in paragraph 15.209, whichever is the lesser attenuation.

Frequency (MHz)	Field strength (uV/m)	Field strength (dBuV/m)	Measurement distance (m)
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

Remarks:

1. Field strength (dBuV/m) = 20 log Field strength (uV/m)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

5.3 Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to the FCC KDB 558074 D01 v05r02 for compliance to FCC 47CFR 15.247 requirements.

The EUT and its simulators are placed on a turn table which is 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.


5.4 Test Specification

According to FCC Part 15 Subpart C Paragraph 15.247.

5.5 Test Result of Radiated Emission Band Edge

Mode 1: EUT 1 with main source of battery

Site :HC-CB04
Condition :3m ,Horizontal
Mode :BLE_1M_TX_2402MHz
Test By :Cyril

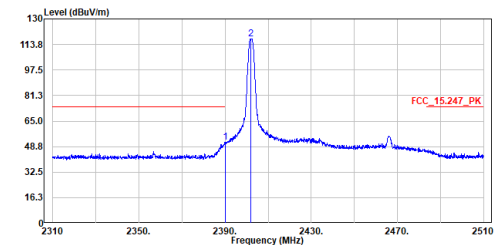


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2390.000	51.70	74.00	-22.30	38.54	13.16	Peak
2	2401.800	117.35	-----	-----	104.22	13.13	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :BLE_1M_TX_2402MHz
Test By :Cyril

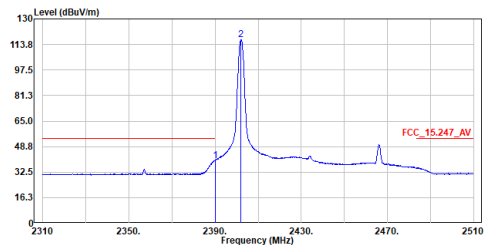


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2390.000	39.79	54.00	-14.21	26.63	13.16	Average
2	2402.100	116.84	-----	-----	103.71	13.13	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :BLE_1M_TX_2402MHz
Test By :Cyril

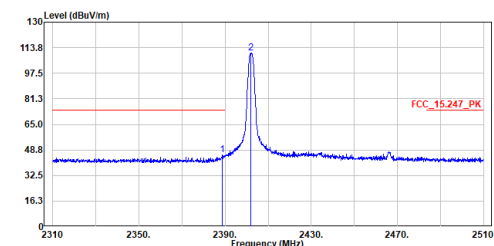


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2388.700	45.55	74.00	-28.45	32.38	13.17	Peak
2	2401.800	110.19	-----	-----	97.06	13.13	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :BLE_1M_TX_2402MHz
Test By :Cyril

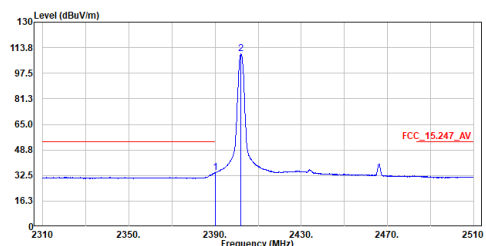


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2390.000	34.27	54.00	-19.73	21.11	13.16	Average
2	2402.100	109.73	-----	-----	96.60	13.13	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
Condition :3m ,Horizontal
Mode :BLE_1M_TX_2440MHz
Test By :Cyril

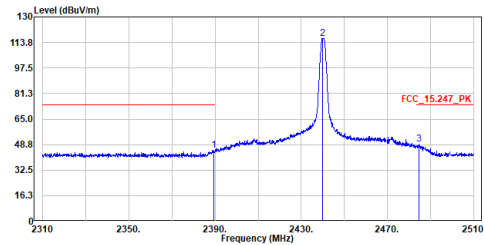

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.300	45.20	74.00	-28.80	32.04	13.16	Peak
2	2439.900	116.27	-----	-----	103.19	13.08	Peak
3	2484.600	49.10	74.00	-24.90	35.79	13.31	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
Condition :3m ,Horizontal
Mode :BLE_1M_TX_2440MHz
Test By :Cyril

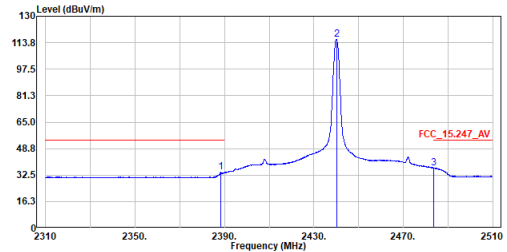

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2388.200	34.12	54.00	-19.88	20.95	13.17	Average
2	2440.100	115.70	-----	-----	102.62	13.08	Average
3	2483.600	36.70	54.00	-17.30	23.41	13.29	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
Condition :3m ,Vertical
Mode :BLE_1M_TX_2440MHz
Test By :Cyril

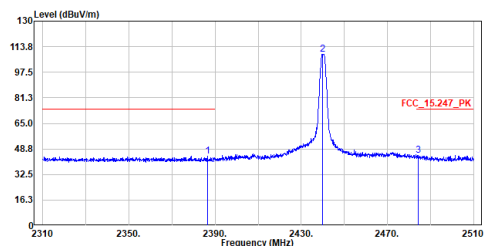

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2386.400	44.18	74.00	-29.82	31.00	13.18	Peak
2	2439.900	109.00	-----	-----	95.92	13.08	Peak
3	2484.300	44.53	74.00	-29.47	31.23	13.30	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
Condition :3m ,Vertical
Mode :BLE_1M_TX_2440MHz
Test By :Cyril

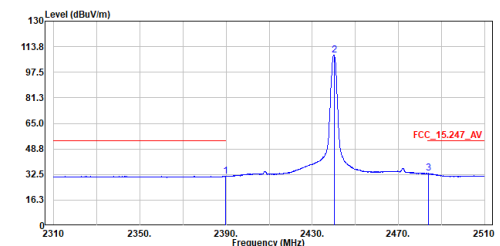

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.900	31.49	54.00	-22.51	18.33	13.16	Average
2	2440.100	108.48	-----	-----	95.40	13.08	Average
3	2483.800	33.15	54.00	-20.85	19.85	13.30	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :BLE_1M_TX_2480MHz
Test By :Cyril

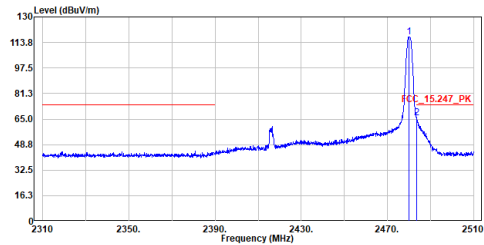


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2480.100	117.16	-----	-----	103.88	13.28	Peak
2	2483.600	65.58	74.00	-8.42	52.29	13.29	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :BLE_1M_TX_2480MHz
Test By :Cyril

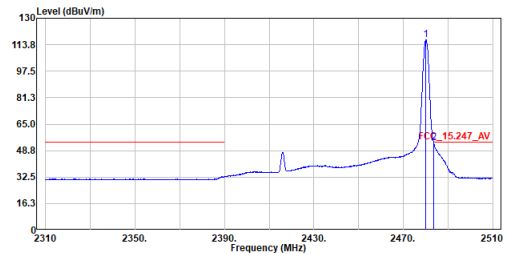


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2480.100	116.61	-----	-----	103.33	13.28	Average
2	2483.600	53.26	54.00	-0.74	39.97	13.29	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :BLE_1M_TX_2480MHz
Test By :Cyril

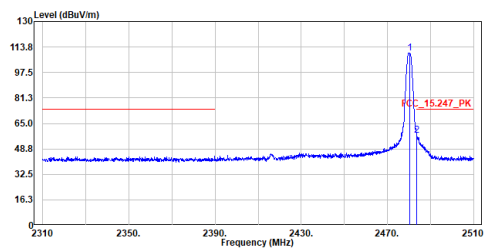


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2480.400	109.84	-----	-----	96.56	13.28	Peak
2	2483.700	57.48	74.00	-16.52	44.19	13.29	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :BLE_1M_TX_2480MHz
Test By :Cyril

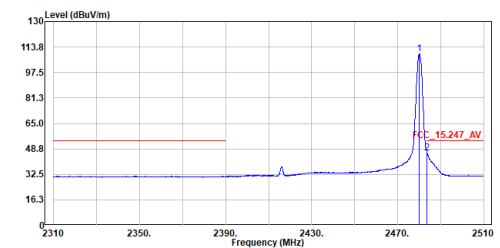


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2480.100	109.32	-----	-----	96.04	13.28	Average
2	2483.600	46.33	54.00	-7.67	33.04	13.29	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :BLE_2M_TX_2402MHz
Test By :Cyril

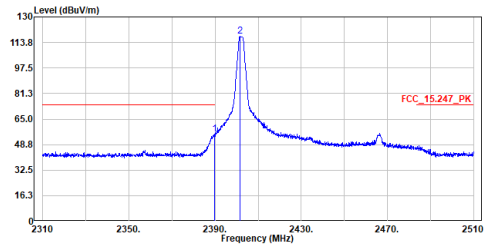


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.800	55.61	74.00	-18.39	42.45	13.16	Peak
2	2401.600	117.49	-----	-----	104.36	13.13	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :BLE_2M_TX_2402MHz
Test By :Cyril

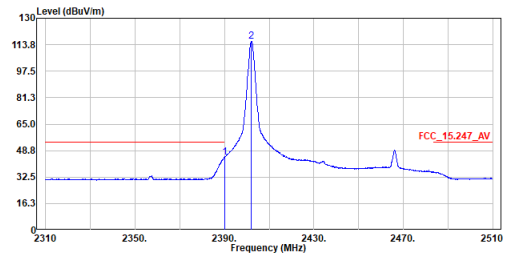


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2390.000	44.84	54.00	-9.16	31.68	13.16	Average
2	2402.100	115.86	-----	-----	102.73	13.13	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :BLE_2M_TX_2402MHz
Test By :Cyril

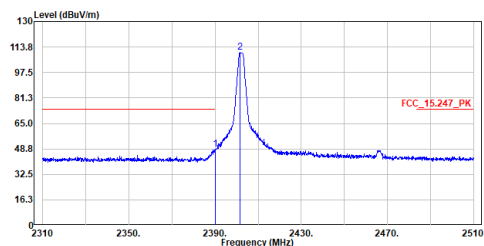


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2390.000	48.46	74.00	-25.54	35.30	13.16	Peak
2	2401.600	110.13	-----	-----	97.00	13.13	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :BLE_2M_TX_2402MHz
Test By :Cyril

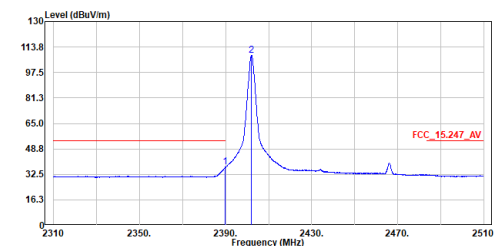


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.900	37.24	54.00	-16.76	24.08	13.16	Average
2	2402.100	108.39	-----	-----	95.26	13.13	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
Condition :3m ,Horizontal
Mode :BLE_2M_TX_2440MHz
Test By :Cyril

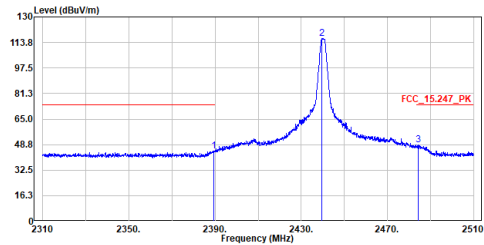

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.500	44.71	74.00	-29.29	31.55	13.16	Peak
2	2439.600	116.15	-----	-----	103.07	13.08	Peak
3	2484.200	48.34	74.00	-25.66	35.04	13.30	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
Condition :3m ,Horizontal
Mode :BLE_2M_TX_2440MHz
Test By :Cyril

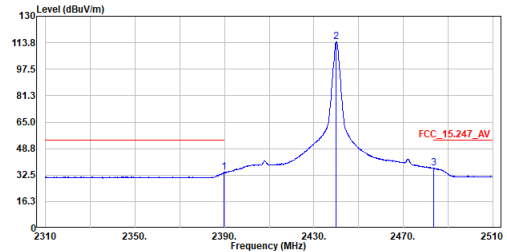

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.900	34.14	54.00	-19.86	20.98	13.16	Average
2	2440.000	114.36	-----	-----	101.28	13.08	Average
3	2483.600	36.81	54.00	-17.19	23.52	13.29	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
Condition :3m ,Vertical
Mode :BLE_2M_TX_2440MHz
Test By :Cyril

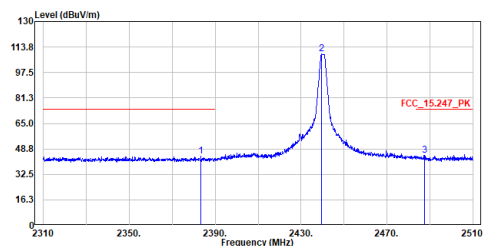

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2383.400	44.36	74.00	-29.64	31.18	13.18	Peak
2	2439.600	109.19	-----	-----	96.11	13.08	Peak
3	2487.600	44.71	74.00	-29.29	31.38	13.33	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
Condition :3m ,Vertical
Mode :BLE_2M_TX_2440MHz
Test By :Cyril

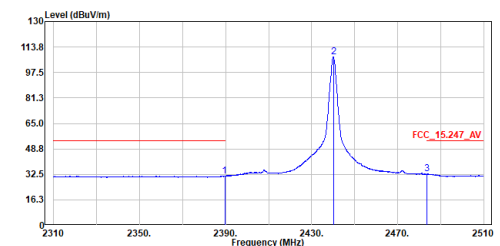

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.600	31.55	54.00	-22.45	18.39	13.16	Average
2	2440.100	107.42	-----	-----	94.34	13.08	Average
3	2483.700	32.71	54.00	-21.29	19.42	13.29	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :BLE_2M_TX_2480MHz
Test By :Cyril

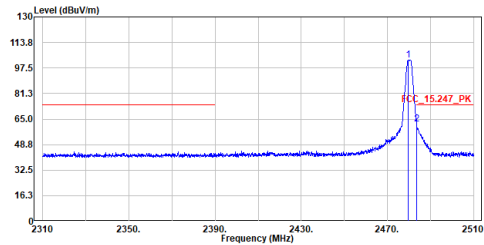


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2479.700	102.63	-----	-----	89.35	13.28	Peak
2	2483.600	61.93	74.00	-12.07	48.64	13.29	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :BLE_2M_TX_2480MHz
Test By :Cyril

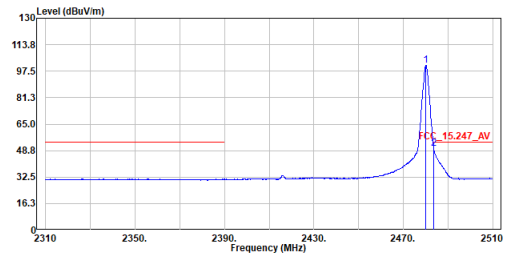


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2480.100	101.02	-----	-----	87.74	13.28	Average
2	2483.600	50.13	54.00	-3.87	36.84	13.29	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :BLE_2M_TX_2480MHz
Test By :Cyril

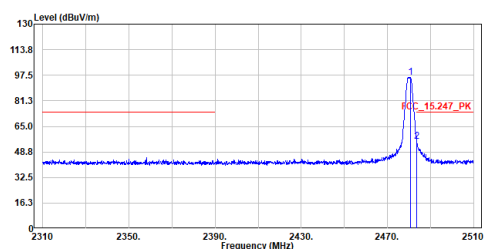


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2480.600	95.98	-----	-----	82.70	13.28	Peak
2	2483.700	55.23	74.00	-18.77	41.94	13.29	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :BLE_2M_TX_2480MHz
Test By :Cyril

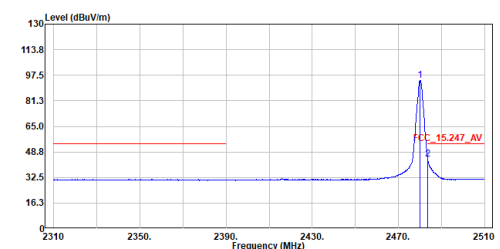


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2480.100	94.40	-----	-----	81.12	13.28	Average
2	2483.600	44.15	54.00	-9.85	30.86	13.29	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

6. Occupied Bandwidth & DTS Bandwidth

6.1 Test Setup

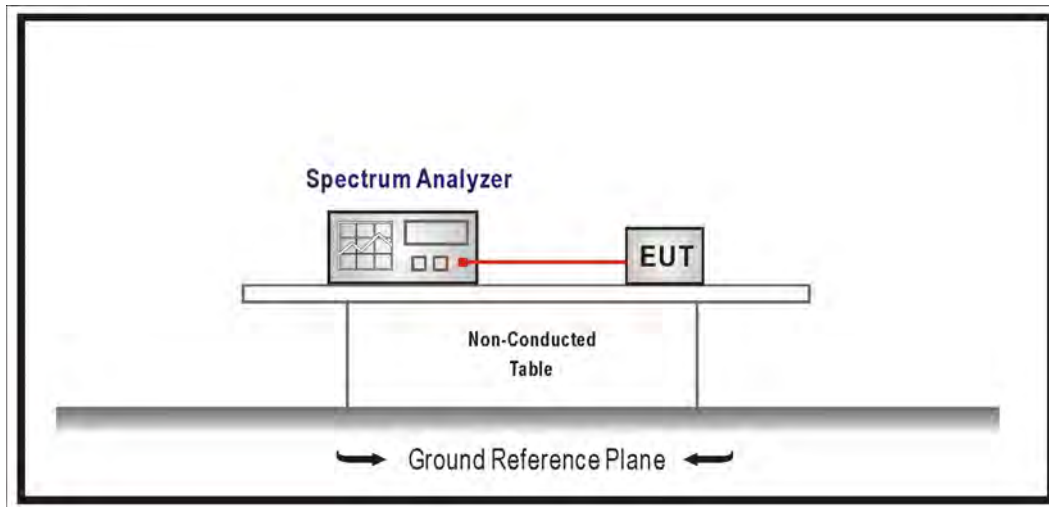

6.2 Test Limit

The 6 dB bandwidth: ≥ 500 kHz.

Occupied Bandwidth: NA

6.3 Test Procedures

The EUT was setup according to ANSI C63.10: 2013; tested according to DTS test procedure of KDB 558074 D01 V05r02 for compliance to FCC 47CFR 15.247 requirements.

6.4 Test Specification


According to FCC Part 15 Subpart C Paragraph 15.247.

6.5 Test Result of Occupied Bandwidth


Mode 1: EUT 1 with main source of battery

Modulation	Channel	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)
GFSK (1 Mbps)	00	2402	1.078	-
	19	2440	1.068	-
	39	2480	1.063	-
GFSK (2 Mbps)	00	2402	2.112	-
	19	2440	2.142	-
	39	2480	2.112	-


GFSK (1 Mbps) / 2402 MHz

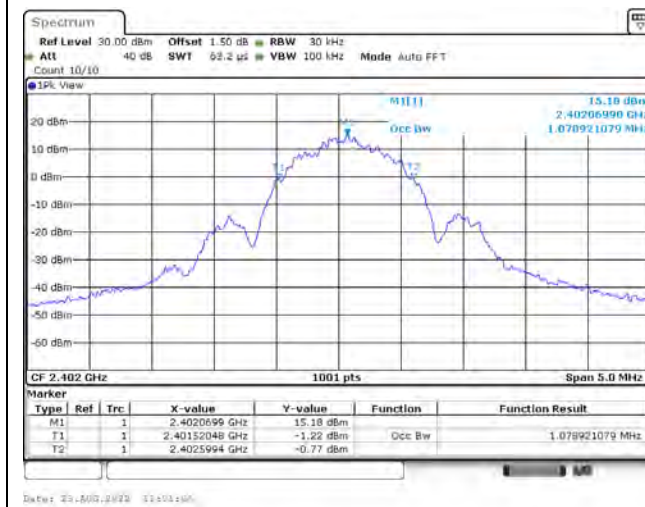


GFSK (1 Mbps) / 2440 MHz

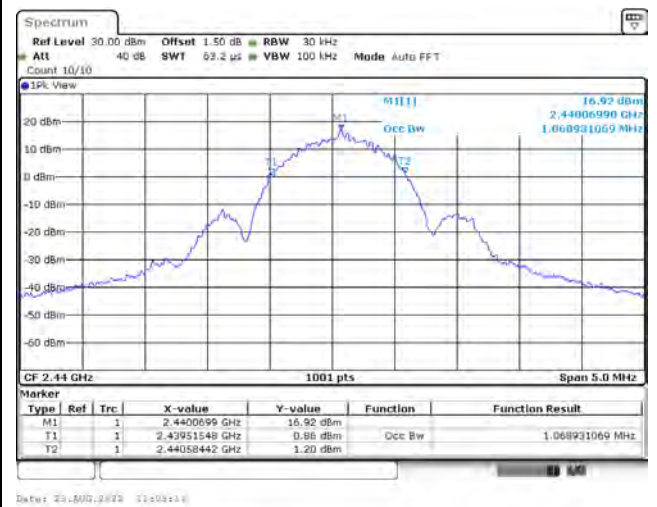


GFSK (1 Mbps) / 2480 MHz

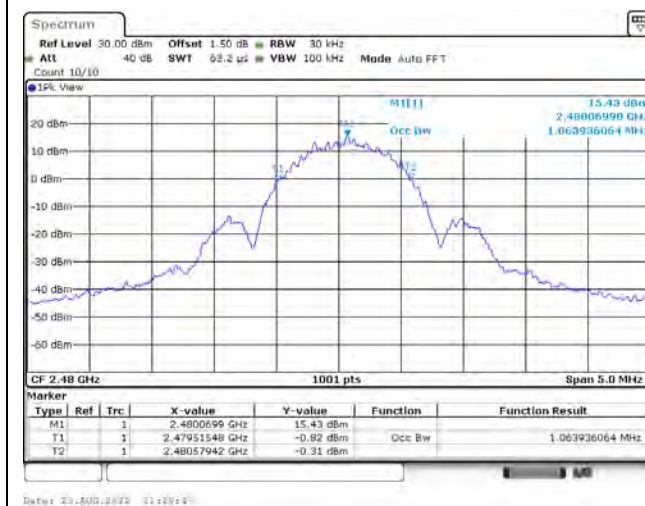


GFSK (2 Mbps) / 2402 MHz

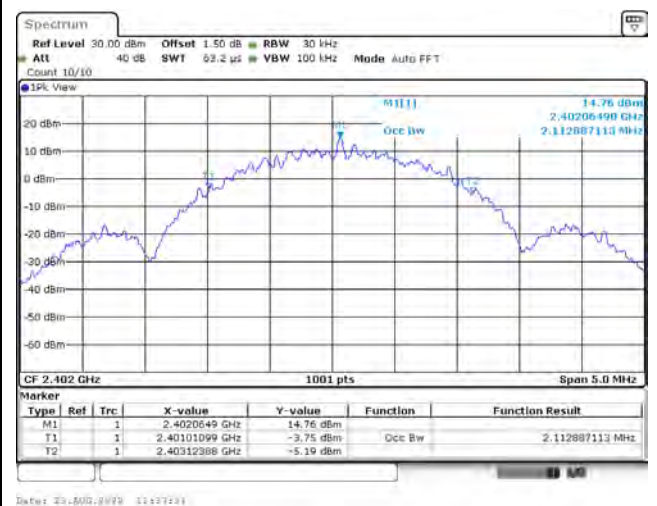

GFSK (2 Mbps) / 2440 MHz

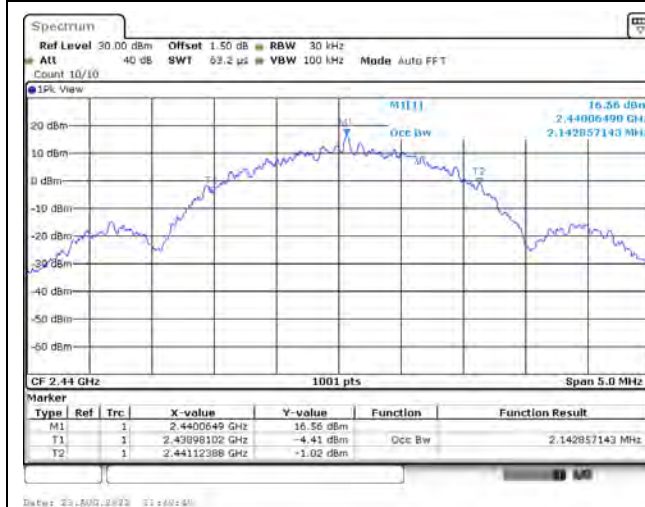

GFSK (2 Mbps) / 2480 MHz

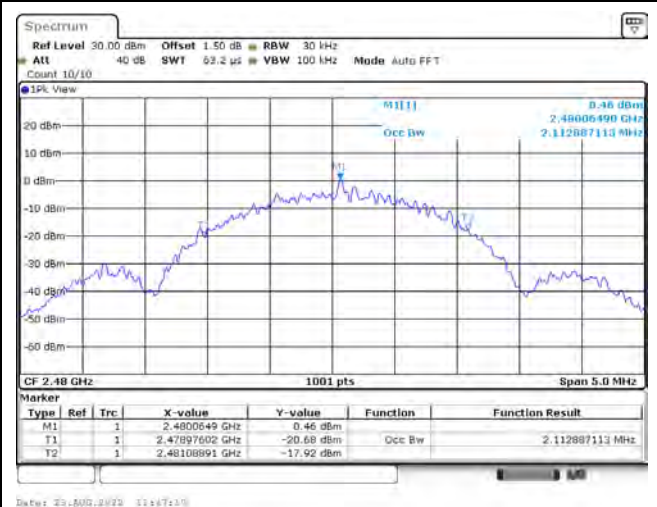


6.6 Test Result of DTS Bandwidth


Mode 1: EUT 1 with main source of battery

Modulation	Channel	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)	Result
GFSK (1 Mbps)	00	2402	0.689	≥ 0.50	Pass
	19	2440	0.699	≥ 0.50	Pass
	39	2480	0.704	≥ 0.50	Pass
GFSK (2 Mbps)	00	2402	1.243	≥ 0.50	Pass
	19	2440	1.138	≥ 0.50	Pass
	39	2480	1.148	≥ 0.50	Pass


GFSK (1 Mbps) / 2402 MHz

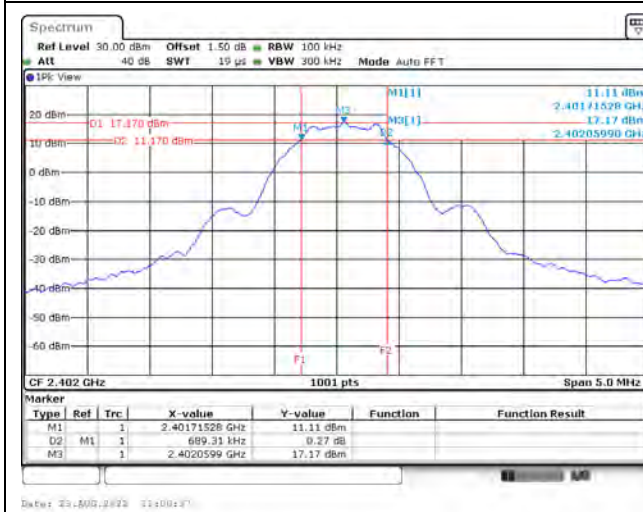


GFSK (1 Mbps) / 2440 MHz

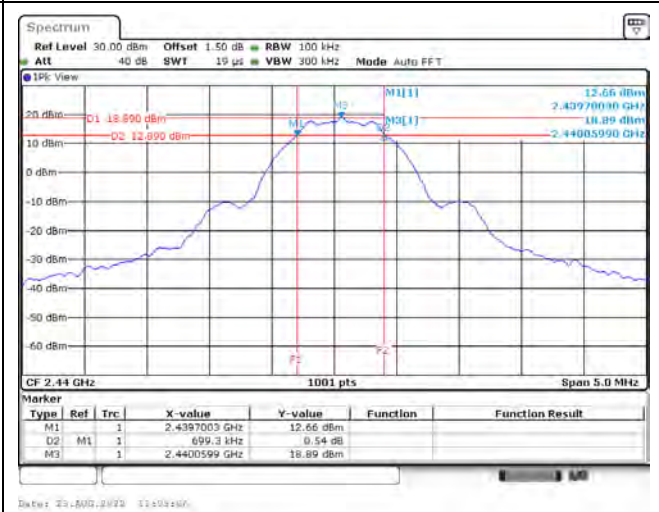


GFSK (1 Mbps) / 2480 MHz

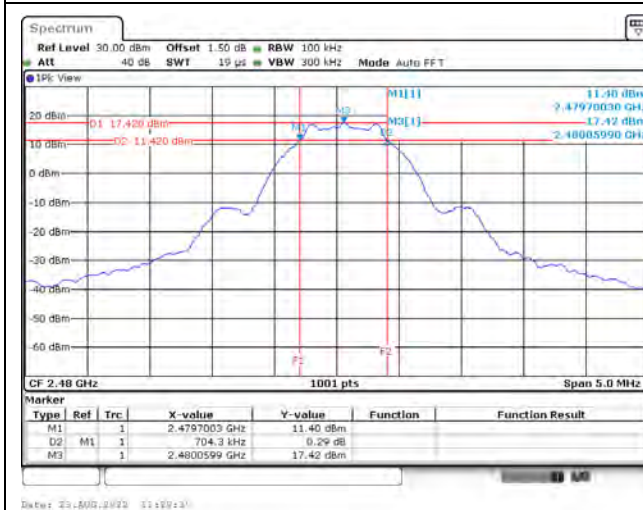


GFSK (2 Mbps) / 2402 MHz

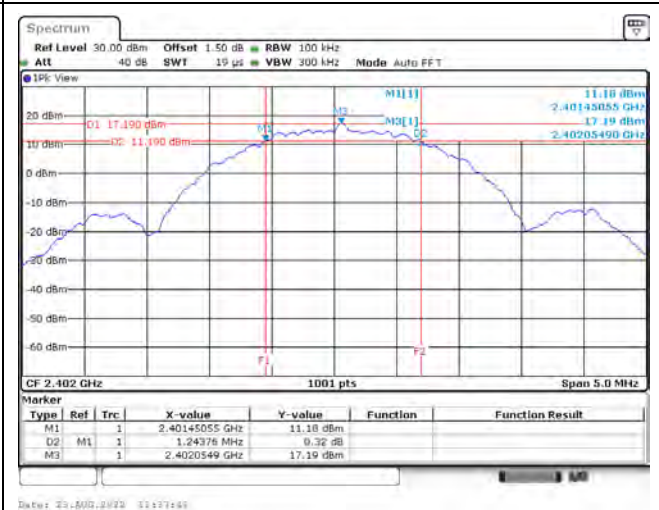

GFSK (2 Mbps) / 2440 MHz

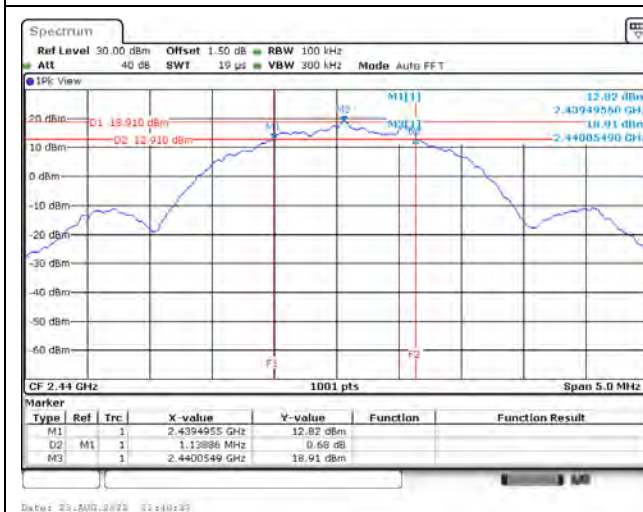


GFSK (2 Mbps) / 2480 MHz

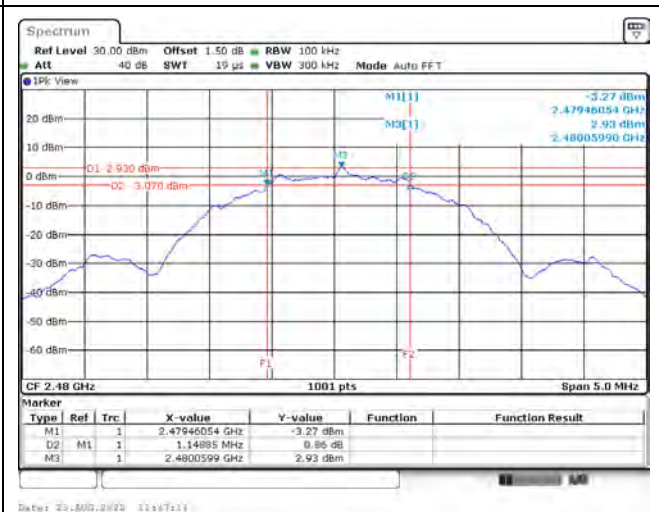

7. Maximum Power Spectral Density

7.1 Test Setup

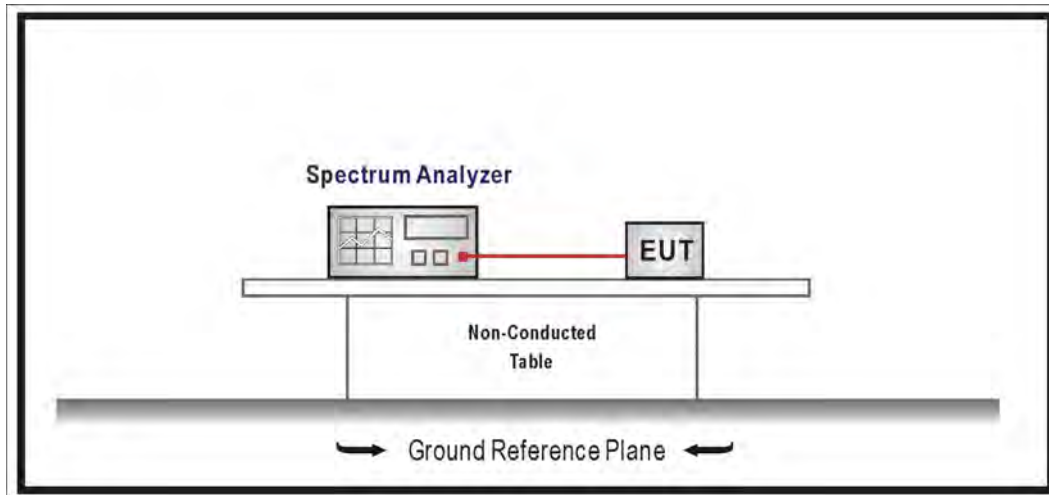

7.2 Test Limit

The peak power spectral density conducted from the intentional radiated to the antenna shall not be greater than +8 dBm in any 3 kHz band during any time interval of continuous transmission.

7.3 Test Procedures

The EUT was setup according to ANSI C63.10: 2013; tested according to DTS test procedure of KDB 558074 D01 V05r02 for compliance to FCC 47CFR 15.247 requirements.






7.4 Test Specification

According to FCC Part 15 Subpart C Paragraph 15.247.

7.5 Test Result of Maximum Power Spectral Density

Mode 1: EUT 1 with main source of battery

Modulation	Channel	Frequency (MHz)	Measure Value (dBm/3kHz)	Limit (dBm/3kHz)	Result
GFSK (1 Mbps)	00	2402	4.980	≤ 8.00	Pass
	19	2440	6.880	≤ 8.00	Pass
	39	2480	4.120	≤ 8.00	Pass
GFSK (2 Mbps)	00	2402	2.190	≤ 8.00	Pass
	19	2440	3.030	≤ 8.00	Pass
	39	2480	-12.300	≤ 8.00	Pass

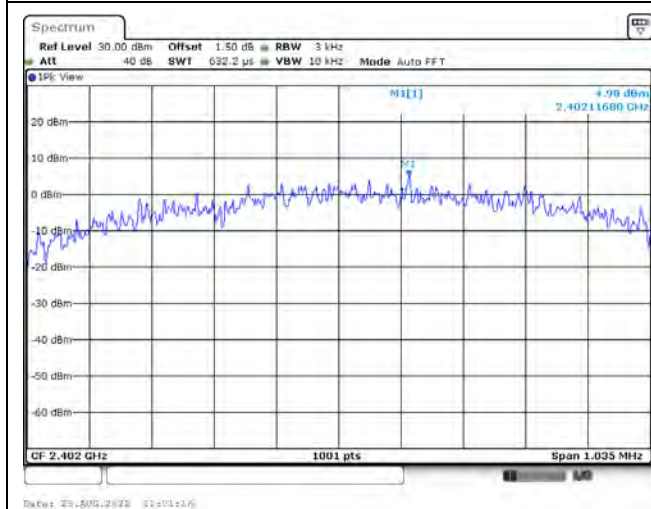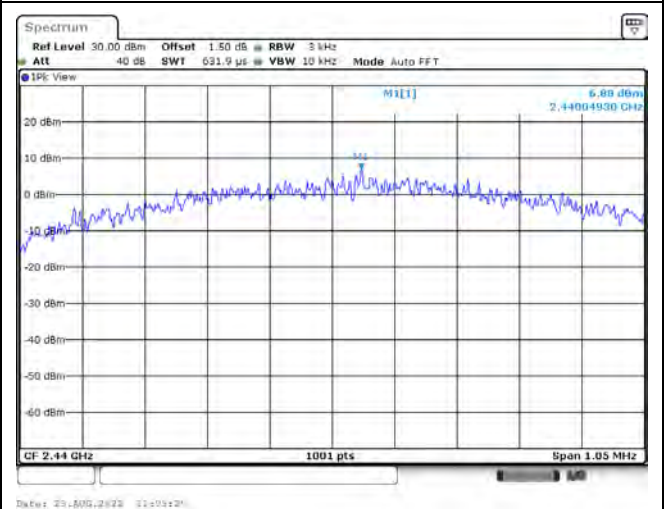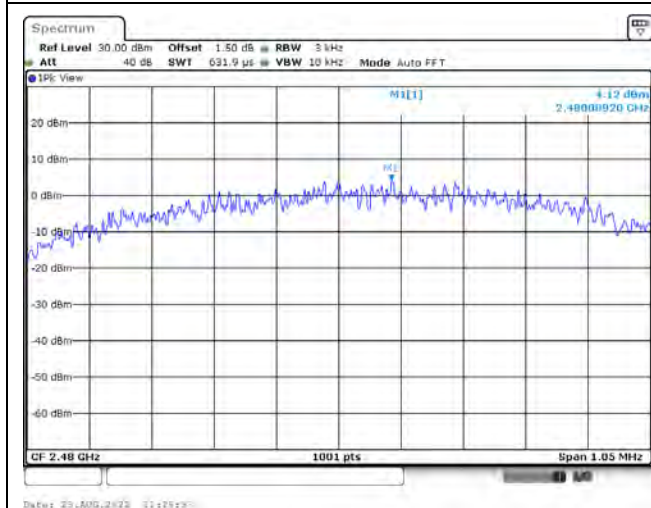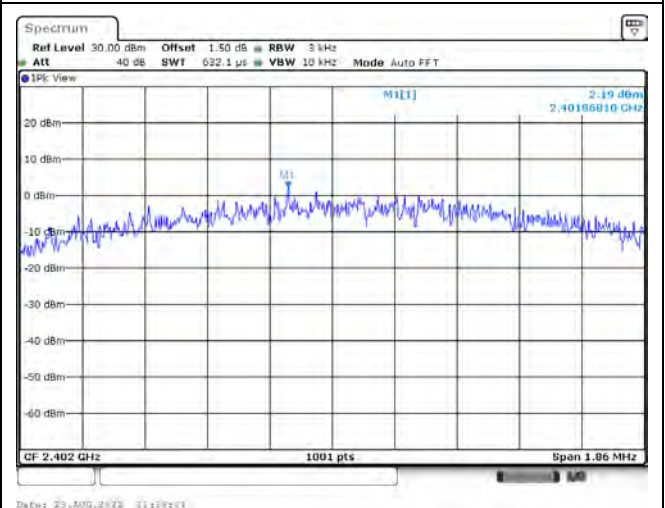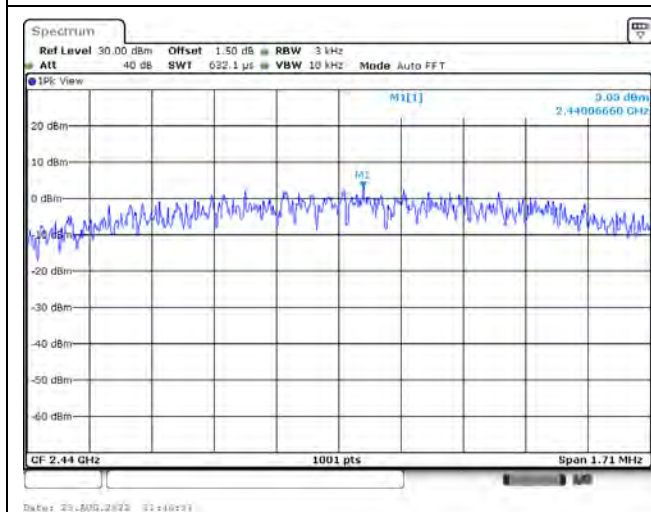GFSK (1 Mbps) / 2402 MHz**GFSK (1 Mbps) / 2440 MHz****GFSK (1 Mbps) / 2480 MHz****GFSK (2 Mbps) / 2402 MHz****GFSK (2 Mbps) / 2440 MHz****GFSK (2 Mbps) / 2480 MHz**