

# EMC TEST REPORT

**Test Report No. : 22EE0021-KT-1**

---

**Applicant :** ORION ELECTRIC CO., LTD.

**Type of equipment :** DVD/VCR

**Model number :** SD-V280U


**Test standard :** FCC Part 15 Subpart B

**Test result :** Complied


1. This test report shall not be reproduced except in full, without the written approval of A-PEX International Co. Ltd.
2. The results in this report apply only to the sample tested.
3. This equipment is in compliance with above regulation. We hereby certify that the data contain a true representation of the EMC profile.
4. The test results in this test report are traceable to the national or international standards.

**Date of test :** December 22, 2001 to January 09, 2002


**Tested by:**

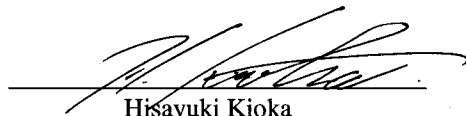  
Hisayuki Kioka  
Engineer

**Tested by:**

  
Hiroya Tabata  
Engineer

**Approved by:**

  
Kazutoshi Hatta  
Site assistant manager

**Date of issue :** January 10, 2002

---

**A-pex International Co., Ltd. Kanto Office EMC Laboratory**

Newstage Yokohama Bldg.1F 1-1-32 Shin-Urashima-cho, Kanagawa-ku, Yokohama-shi, Kanagawa 221-0031, JAPAN  
Telephone : +81 45 450 1515 Facsimile: +81 45 450 1534

## Contents

	Page
Section 1 : Client information	3
Section 2 : Equipment under test (E.U.T.)	3
Section 3 : Test specification, methods & procedures	5
Section 4 : Operation of E.U.T. during tests	6
Section 5 : Summary of test results	8
Section 6 : Test instruments	10
Section 7 : Conducted interference	11
Section 8 : Radiated emission	14
Section 9 : Antenna terminal voltage	17
Section 10 : RF output level / spurious emission	18
Section 11 : Antenna transfer switch	19
Section 12 : Picture sensitivity	20
Section 13 : Noise figure	21
Appendix 1 : Photographs of test set up	22
Appendix 2 : Data of EMI tests	30

## **Section 1 : Client information**

Company name : ORION ELECTRIC CO., LTD.  
Brand Name : TOSHIBA  
Address : 41-1 Iehisa-cho, Takefu-shi, Fukui 915-8555, JAPAN  
Telephone number : +81-778-23-0019  
Facsimile number : +81-778-23-7799  
Contact person : Hiroshi Tsujimoto  
Section manager  
Engineering headquarters  
Administration section

## **Section 2 : Equipment under test (E.U.T.)**

### **2.1 Identification of E.U.T.**

Type of equipment : DVD/VCR  
Model number : SD-V280U  
Rating : AC 120 V / 60 Hz  
Manufacturer : 1. WORLD ELECTRIC (THAILAND) LTD.  
236 Moo 2 Nongchark, Banbung, Chonburi 20170, Thailand  
2. KORAT DENKI LTD.  
149 Moo 10 Thombol Chokchai, Amphur Chokchai, Nakhonratchasima  
30190, Thailand  
3. ORION AMERICA, INC.  
Hwy 41 North, Orion Place, Princeton, Indiana 47670, U.S.A  
Receipt Date of Sample : December 21, 2001  
Condition of EUT : Production Prototype

## 2.2 Product description

ORION ELECTRIC CO., LTD., Model: SD-V280U (referred to as the EUT in this report) is a DVD/VCR.  
The EUT specifications is as follows.

Tuner type	:	Quartz PLL frequency synthesized
I / F	:	45.75 MHz (Picture), 41.25 MHz (Sound)
Receiving channel	:	VHF 2 – 13 ch / UHF 14 – 69 ch / CATV 1 – 125 ch
Antenna input	:	75 ohm
Video signal	:	NTSC color
Power source	:	AC 120 V / 60 Hz
		Operation: 20 W
		Stand by: 4 W
DVD/VCR	:	Video input 1.0 V(p-p), 75 W, negative sync., pin jack x 2
		Video output 1.0 V(p-p), 75 W, negative sync., pin jack x 1
		Audio input 300 mV(rms), 50 kW. negative sync., pin jack (L/R) x 2
		Audio output 300 mV(rms), 1kW. negative sync., pin jack (L/R) x 1
DVD	:	S video output (Y) 1.0 V (p-p), 75 W, negative sync., Mini DIN 4-pin x 1
		(C) 0.286 V (p-p), 75 ohm
		Component video output (Y) 1.0 V(p-p), 75 W, negative sync., pin jack x 1
		(PB ) / (PR ) 0.7 V (p-p), 75 W, pin jack x 2
		Audio output (BITSTREAM/PCM 0.5V (p-p), 75 W, pin jack x 1
		COAXIAL)
		Audio output (BITSTREAM / PCM Optical connector 1
		OPTICAL)
		Audio output (ANALOG) 2.0 V(rms), 220 W, pin jacks (L, R) x 1

## 2.3 Similar apparatus

There are similar apparatus for the EUT as follows.

SD-V280C  
SD-V280-S-TU  
SD-V280-S-TC

### **Section 3 : Test specification, methods & procedures**

#### **3.1 Test specification**

Test specification : FCC Part 15 Subpart B

Title : FCC 47 CFR Part 15 Radio Frequency Device  
Subpart B Unintentional Radiators (Subpart C Intentional Radiators)

#### **3.2 Methods & procedures**

No.	Item	Test procedure	Limits	Remarks
1	Conducted interference	ANSI C63.4:1992 IEEE 213:1987 IEEE 187:1990	250 uV	LISN
2	Radiated emission	ANSI C63.4:1992 IEEE 213:1987 IEEE 187:1990	30–88 MHz: 100 uV/m 88–216 MHz: 150 uV/m 216–960 MHz: 200 uV/m above 960 MHz: 500 uV/m	3 m
3	Antenna terminal voltage	ANSI C63.4:1992 IEEE 213:1987 IEEE 187:1990	2 nW (at 75 ohm)	—
4	RF output level	ANSI C63.4:1992 IEEE 213:1987	Video signal: 3000 uV Aural signal: 671 uV	—
	Spurious emission	IEEE 187:1990	94.8 uV	—
5	Transfer switch	ANSI C63.4:1992 IEEE 213:1987 IEEE 187:1990	9.5 dB	—
6	Picture sensitivity	ANSI C63.4:1992 IEEE 213:1987 IEEE 187:1990	8 dB	—
7	Noise figure	FCC/OET MP:2:1986	14 dB	—

#### **3.3 Additions or deviations to standard**

No addition, deviation or exclusion has been made from standards.

## Section 4 : Operation of E.U.T. during tests

### 4.1 Operating modes

The EUT exercise program used during testing was designed exercise the various system components in a manner similar to typical use.


The sequence in used :  
\* Receive mode (0 dBmV input / 25 dBmV input)  
\* AV input mode (1 Vp-p input / 5 Vp-p input) Line 1 / Line 2  
\* VCR playback mode  
\* DVD play mode

Operation : The EUT tested above operation mode  
(Using a video tape with a typical TV signal recorded on it, if necessary.)

Just ification : The system was configured in typical fashion (as a customer would normally use it) for testing.


### 4.2 Configuration and peripherals

#### Front View

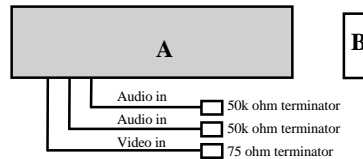

\* Cabling was taken into consideration and test data was taken under worse case conditions.

#### Top View

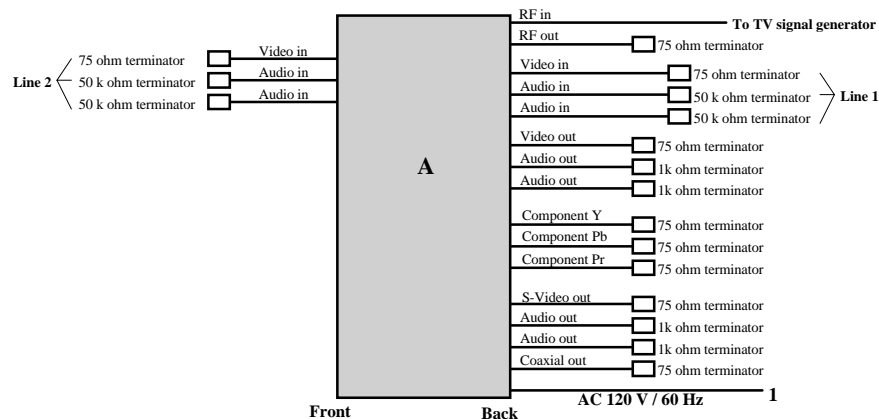

\* Cabling was taken into consideration and test data was taken under worse case conditions.

**Description of EUT and support equipment**

Sign	Item	Model number	Serial number	Manufacturer
A	DVD/VCR	SD-V280U	–	ORION ELECTRIC CO., LTD.
B	Remote Controller	–	–	ORION ELECTRIC CO., LTD.

Meshed column are represented

**List of cable used**

No.	Item	Length (m)	Shielding	Manufacturer
1	AC power cable	1.8	Unshielded	–

## Section 5 : Summary of test results

### 5.1 Test results

No.	Item	Test procedure	Limits	Worst margin	Results
1	Conducted interference	ANSI C63.4:1992 IEEE 213:1987 IEEE 187:1990	250 uV	12.7 dB (0.45 MHz)	Passed
2	Radiated emission	ANSI C63.4:1992 IEEE 213:1987 IEEE 187:1990	30–88 MHz: 100 uV/m 88–216 MHz: 150 uV/m 216–960 MHz: 200 uV/m above 960 MHz: 500 uV/m	5.2 dB (344.06 MHz)	Passed
3	Antenna terminal voltage	ANSI C63.4:1992 IEEE 213:1987 IEEE 187:1990	2 nW (at 75 ohm)	3.3 dB (1117.9 MHz)	Passed
4	RF output level	ANSI C63.4:1992 IEEE 213:1987	Video signal: 3000 uV Aural signal: 671 uV	1.7 dB (61.25 MHz)	Passed
	Spurious emission	IEEE 187:1990	94.8 uV	21.1 dB (165.81 MHz, 221.04 MHz)	Passed
5	Transfer switch	ANSI C63.4:1992 IEEE 213:1987 IEEE 187:1990	9.5 dB	2.7 dB (61.25 MHz)	Passed
6	Picture sensitivity	ANSI C63.4:1992 IEEE 213:1987 IEEE 187:1990	8 dB	–	Passed
7	Noise figure	FCC/OET MP:2:1986	14 dB	4.9 dB (687.25 MHz, 759.25 MHz)	Passed

**A-PEX INTERNATIONAL hereby confirms that E.U.T., in the configuration tests, complies with the specifications FCC Part15 Subpart B.**

### 5.2 Test instruments

Please refer to the list of test instruments in Section 6.



### 5.3 Test location

A-PEX International Co.,Ltd. Kanto office EMC Laboratory  
Newstage Yokohama Bldg. 1F 1-1-32 Shin-Urashima-cho, Kanagawa-ku, Yokohama-shi, Kanagawa  
221-0031, JAPAN  
TEL : +81-45-450-1515  
FAX : +81-45-450-1534

A-PEX International Co.,Ltd. Yokowa Laboratory  
108 Yokowa-cho, Ise-shi, Mie 516-1106, JAPAN  
TEL : +81-596-39-1485  
FAX : +81-596-39-0232

### 5.4 Photographs of test set up

Please refer to Appendix 1.

### 5.5 Test data

Please refer to Appendix 2.

## Section 6 : Test instruments

Instruments	Manufacturer	Model No.	Control No.	Test Item	Calibration date	Validity
LISN	Schwarzbeck	NSLK8127	APLSN05	CE	January 18, 2001	January 17, 2002
Test receiver	Rohde & Schwarz	ESS	APRCV05	CE	June 04, 2001	June 03, 2002
TV generator	Leader	408	APTVG04	CE	Pre check	-
Coaxial cable	Fujikura	5D2W	APCBL02	CE	August 07, 2001	August 06, 2002
Spectrum analyzer	Advantest	R3365	YTSPA01	AT	April 03, 2001	April 02, 2002
Matching pad	TME	ZT-204	APMAT04	AT	October 23, 2001	October 22, 2002
Matching pad	TME	ZT-130	APMAT05	AT	October 23, 2001	October 22, 2002
Pre amplifier	Anritsu	MH648A	APPRA01	AT	August 09, 2001	August 08, 2002
Pre amplifier	Hewlett Packard	8449B	APPRA05	AT	August 09, 2001	August 08, 2002
Coaxial cable	Fujikura	5D2W	APCBL06	AT	August 07, 2001	August 06, 2002
Coaxial cable	Fujikura	5D2W	APCBL07	AT	August 07, 2001	August 06, 2002
Signal generator	Rohde & Schwarz	SMY01	YTSSG02	PS	May 07, 2001	May 06, 2002
Oscillo scope	Tektronix	TDS410A	APOSC01	PS	April 27, 2001	April 26, 2002
Band Pass Filter	Erika Fiedlar	BP	APBPF01	PS	Pre check	-
Noise figure indicator	Elena	ENF-2005	APNFM01	NF	September 27, 2000	September 26, 2002
Noise source	Elena	MC1100	APNFS01	NF	September 27, 2000	September 26, 2002

Instruments	Manufacturer	Model No.	Control No.	Test Item	Calibration date	Validity
Pre amplifier	Anritsu	MH648A	AF-02	RE	March 31, 2001	March 30, 2002
Pre amplifier	H.P.	8449B	AF-04	RE	November 03, 2001	November 02, 2002
Attenuator	Anritsu	MP721B	AT-03	RE	March 31, 2001	March 30, 2002
Biconical antenna	Schwarzbeck	BBA9106	BA-01	RE	May 01, 2001	April 30, 2002
Logperiodic antenna	Schwarzbeck	UKLP9140-A	LA-07	RE	September 27, 2001	September 26, 2002
Horn antenna	A.H Systems	SAS200/571	HA-01	RE	May 20, 2001	May 19, 2002
Spectrum analyzer	H.P.	8567A	SA-01	RE	March 31, 2001	March 30, 2002
Spectrum analyzer	Advantest	R3273	SA-06	RE	November 20, 2001	November 19, 2002
Test receiver	Rohde & Schwarz	ESVS30	TR-02	RE	April 12, 2001	April 11, 2002
Yokowa No. 1 open Coaxial cable (0.01 – 1000 MHz)	A-Pex	CC-11, CC-12, CC-14, CC-15, CC-16, CC-17, SW-11, SW-12	CC-1ORC	RE	March 31, 2001	March 30, 2002
Microwave cable	Suhner	CC-C2,C8	CC-C28G	RE	September 14, 2001	September 13, 2002
Loop antenna	Rohde & Schwarz	HFH2-Z2	LP-01	RE	September 18, 2001	September 17, 2002
Open test site	JSE	10 m	YOATS-01	RE	May 07, 2001	May 06, 2002

\* The abbreviation in the test item column stands for:

CE: Conducted emission, RE: Radiated emission, AT: Antenna terminal voltage,  
RF: RF output level / spurious emission, TS :Antenna transfer switch,  
PS: Picture sensitivity, NF: Noise figure

**A-pex International Co., Ltd. Kanto Office EMC Laboratory.**

Newstage Yokohama Bldg.1F 1-1-32 Shin-Urashima-cho, Kanagawa-ku, Yokohama-shi, Kanagawa 221-0031, JAPAN  
Telephone : +81 45 450 1515 Facsimile: +81 45 450 1534

## **Section 7 : Conducted interference**

### **7.1 Operation environment**

The test was carried out in a screened room the size of 6 x 7 x 2.4 m, at Kanto office EMC laboratory.

Date : January 07, 2002  
Temperature : 22.0 °C  
Humidity : 35 %


### **7.2 Test configuration**

EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The rear of tabletop was located 40 cm to the vertical conducting plane. The rear of EUT, including peripherals aligned and flush with rear of tabletop. All other surfaces of tabletop was at least 80 cm from any other grounded conducting surface. I/O cables and AC cables that were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30 cm to 40 cm long and were hanged at a 40 cm height to the ground plane. Each EUT current-carrying power lead, except the ground (safety) lead, were individually connected through a LISN to the input power source. All unused 50 ohm connectors of the LISN were resistively terminated in 50 ohm when not connected to the measuring equipment.

A drawing of the set up is shown in figure 1 and photographs in Appendix 1.

**Figure 1. Conducted interference**


**Receive + Rec. mode (0 dBmV input / 25 dBmV input)**

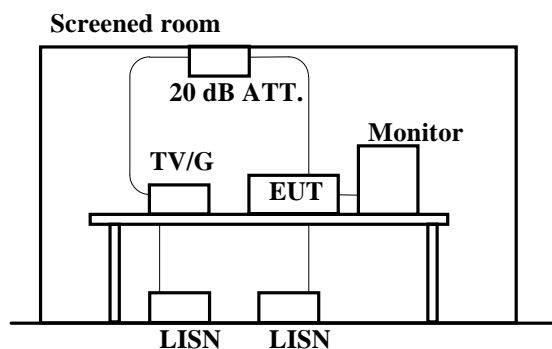

Note:

RF in: TV signal generator connected  
Front video in: 75 ohm terminated with video cable  
Front audio in: 50 k ohm terminated with audio cable  
Rear video in: 75 ohm terminated with video cable  
Rear audio in: 50 k ohm terminated with audio cable  
Rear video out: 75 ohm terminated with video cable  
Rear audio out: 1 k ohm terminated with audio cable  
Rear S-video out: 75 ohm terminated with video cable  
Rear component out: 75 ohm terminated with audio cable  
Rear coaxial out: 75 ohm terminated with audio cable  
RF output: 75 ohm terminated with RF output cable


# AV input + Rec. mode (1 Vp-p input / 5 Vp-p input) Line 1

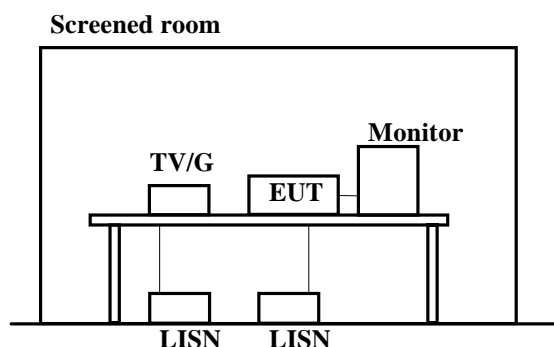

Note:

RF in: 75 ohm terminated with RF output cable  
Front video in: 75 ohm terminated with video cable  
Front audio in: 50 k ohm terminated with audio cable  
Rear video in: TV signal generator connected  
Rear audio in: 50 k ohm terminated with audio cable  
Rear video out: 75 ohm terminated with video cable  
Rear audio out: 1 k ohm terminated with audio cable  
Rear S-video out: 75 ohm terminated with video cable  
Rear component out: 75 ohm terminated with audio cable  
Rear coaxial out: 75 ohm terminated with audio cable  
RF output: 75 ohm terminated with RF output cable


# AV input + Rec. mode (1 Vp-p input / 5 Vp-p input) Line 2

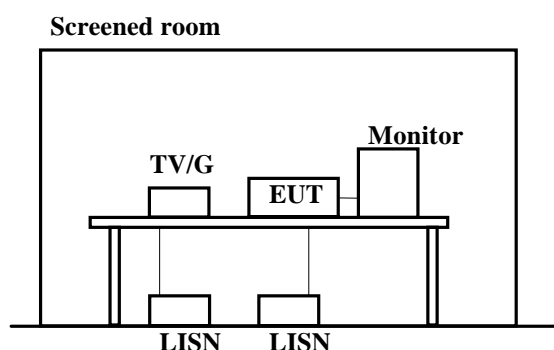

Note:

RF in: 75 ohm terminated with RF output cable  
Front video in: TV signal generator connected  
Front audio in: 50 k ohm terminated with audio cable  
Rear video in: 75 ohm terminated with video cable  
Rear audio in: 50 k ohm terminated with audio cable  
Rear video out: 75 ohm terminated with video cable  
Rear audio out: 1 k ohm terminated with audio cable  
Rear S-video out: 75 ohm terminated with video cable  
Rear component out: 75 ohm terminated with audio cable  
Rear coaxial out: 75 ohm terminated with audio cable  
RF output: 75 ohm terminated with RF output cable


# VCR playback mode

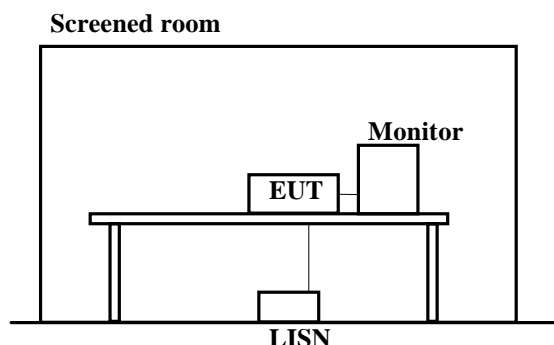

Note:

RF in: 75 ohm terminated with RF output cable  
Front video in: 75 ohm terminated with video cable  
Front audio in: 50 k ohm terminated with audio cable  
Rear video in: 75 ohm terminated with video cable  
Rear audio in: 50 k ohm terminated with audio cable  
Rear video out: 75 ohm terminated with video cable  
Rear audio out: 1 k ohm terminated with audio cable  
Rear S-video out: 75 ohm terminated with video cable  
Rear component out: 75 ohm terminated with audio cable  
Rear coaxial out: 75 ohm terminated with audio cable  
RF output: 75 ohm terminated with RF output cable

## DVD play mode

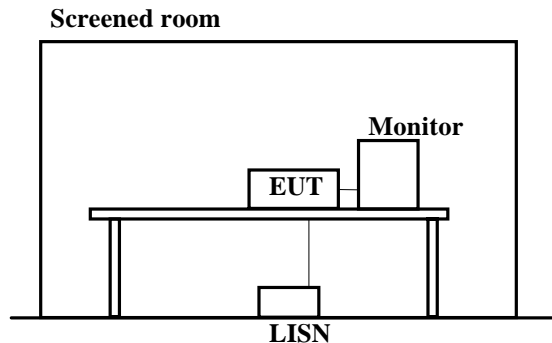

### Note:

RF in: 75 ohm terminated with RF output cable  
Front video in: 75 ohm terminated with video cable  
Front audio in: 50 k ohm terminated with audio cable  
Rear video in: 75 ohm terminated with video cable  
Rear audio in: 50 k ohm terminated with audio cable  
Rear video out: 75 ohm terminated with video cable  
Rear audio out: 1 k ohm terminated with audio cable  
Rear S-video out: 75 ohm terminated with video cable  
Rear component out: 75 ohm terminated with audio cable  
Rear coaxial out: 75 ohm terminated with audio cable  
RF output: 75 ohm terminated with RF output cable

## 7.3 Test conditions

Frequency range : 0.45 MHz – 30 MHz  
EUT position : Table top

## 7.4 Test procedure

The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT within a screened room. The EUT was connected to a Line Impedance Stabilization Network (LISN). An overview sweep with peak detection has been performed. The measurements have been performed with a quasi-peak detector and if required, with an average detector.

The EUT was put into operation at receive mode, AV input mode, VCR playback mode and DVD play mode. EUT and desired signal generator should connect through 20 dB attenuator.

The conducted emission measurements were made with the following detector function of the test receiver.

Detector Type : Quasi-Peak  
IF Bandwidth : 10 kHz

## 7.5 Test result

### Passed

Please refer to summary of the test results in Appendix 2.

Test engineer : Hisayuki Kioka

## Section 8 : Radiated emission

### 8.1 Operation environment

The test was carried out in a open area test site the size of 10 x 20 m, at Yokowa EMC laboratory.


Date : December 22, 2001	Date : December 25, 2001
Temperature : 16.0 °C	Temperature : 18.0 °C
Humidity : 56 %	Humidity : 48 %

### 8.2 Test configuration

EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The rear of EUT, including peripherals was aligned and flush with rear of tabletop. I/O cables that were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30 cm to 40 cm long and were hanged 40 cm height to the ground plane. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.


A drawing of the set up is shown in figure 2 and photographs in Appendix 1.

**Figure 2. Radiated emission**

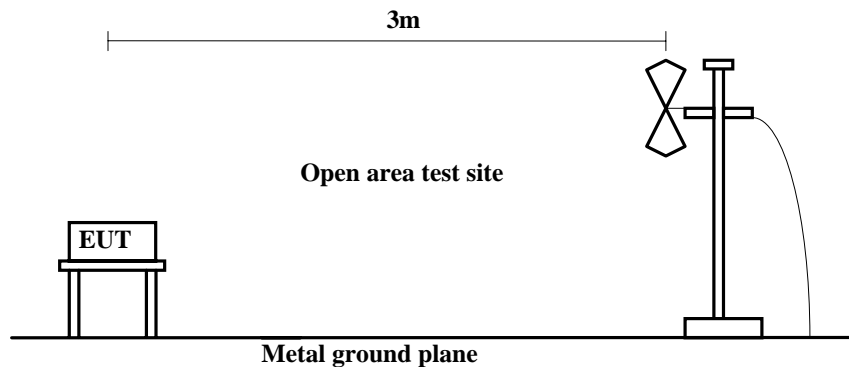

**Receive + Rec. mode (0 dBmV / 25 dBmV)**

**Open area test site**

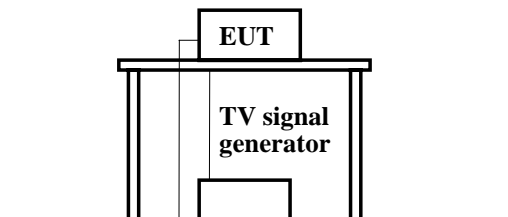

Note:


RF in: TV signal generator connected  
Front video in: 75 ohm terminated with video cable  
Front audio in: 50 k ohm terminated with audio cable  
Rear video in: 75 ohm terminated with video cable  
Rear audio in: 50 k ohm terminated with audio cable  
Rear video out: 75 ohm terminated with video cable  
Rear audio out: 1 k ohm terminated with audio cable  
Rear S-video out: 75 ohm terminated with video cable  
Rear component out: 75 ohm terminated with audio cable  
Rear coaxial out: 75 ohm terminated with audio cable  
RF output: 75 ohm terminated with RF output cable

**A-pex International Co., Ltd. Kanto Office EMC Laboratory.**

Newstage Yokohama Bldg. 1F 1-1-32 Shin-Urashima-cho, Kanagawa-ku, Yokohama-shi, Kanagawa 221-0031, JAPAN  
Telephone : +81 45 450 1515 Facsimile: +81 45 450 1534

**AV input + Rec. mode (1 Vp-p input / 5 Vp-p input) Line 1**

**Open area test site**

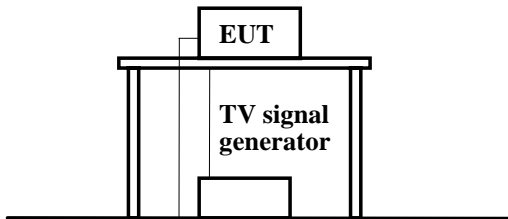


**Note:**

RF in: 75 ohm terminated with RF output cable  
Front video in: 75 ohm terminated with video cable  
Front audio in: 50 k ohm terminated with audio cable  
Rear video in: TV signal generator connected  
Rear audio in: 50 k ohm terminated with audio cable  
Rear video out: 75 ohm terminated with video cable  
Rear audio out: 1 k ohm terminated with audio cable  
Rear S-video out: 75 ohm terminated with video cable  
Rear component out: 75 ohm terminated with audio cable  
Rear coaxial out: 75 ohm terminated with audio cable  
RF output: 75 ohm terminated with RF output cable

**AV input + Rec. mode (1 Vp-p input / 5 Vp-p input) Line 2**

**Open area test site**

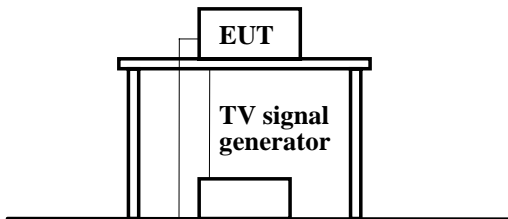


**Note:**

RF in: 75 ohm terminated with RF output cable  
Front video in: TV signal generator connected  
Front audio in: 50 k ohm terminated with audio cable  
Rear video in: 75 ohm terminated with video cable  
Rear audio in: 50 k ohm terminated with audio cable  
Rear video out: 75 ohm terminated with video cable  
Rear audio out: 1 k ohm terminated with audio cable  
Rear S-video out: 75 ohm terminated with video cable  
Rear component out: 75 ohm terminated with audio cable  
Rear coaxial out: 75 ohm terminated with audio cable  
RF output: 75 ohm terminated with RF output cable

**VCR playback mode**

**Open area test site**

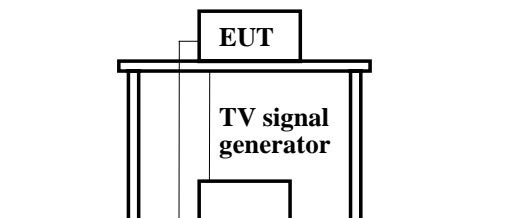


**Note:**

RF in: 75 ohm terminated with RF output cable  
Front video in: 75 ohm terminated with video cable  
Front audio in: 50 k ohm terminated with audio cable  
Rear video in: 75 ohm terminated with video cable  
Rear audio in: 50 k ohm terminated with audio cable  
Rear video out: 75 ohm terminated with video cable  
Rear audio out: 1 k ohm terminated with audio cable  
Rear S-video out: 75 ohm terminated with video cable  
Rear component out: 75 ohm terminated with audio cable  
Rear coaxial out: 75 ohm terminated with audio cable  
RF output: 75 ohm terminated with RF output cable

## DVD play mode

### Open area test site

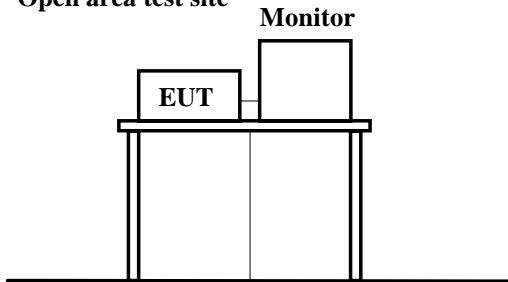

### Note:

RF in: 75 ohm terminated with RF output cable  
Front video in: 75 ohm terminated with video cable  
Front audio in: 50 k ohm terminated with audio cable  
Rear video in: 75 ohm terminated with video cable  
Rear audio in: 50 k ohm terminated with audio cable  
Rear video out: 75 ohm terminated with video cable  
Rear audio out: 1 k ohm terminated with audio cable  
Rear S-video out: 75 ohm terminated with video cable  
Rear component out: 75 ohm terminated with audio cable  
Rear coaxial out: 75 ohm terminated with audio cable  
RF output: 75 ohm terminated with RF output cable

## 8.3 Test conditions

Frequency range : 30 MHz – 2000 MHz  
Test distance : 3 m  
EUT position : Table top

## 8.4 Test procedure

The Radiated Electric Field Strength intensity has been measured on an open test site with a ground plane and at a distance of 3 m.

Pre check measurements were performed within a screened room or used search coil for ambient noise at high-level, especially.

Measurements were performed with a quasi-peak detector.

The measuring antenna height was varied between 1 to 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity. The measurements were performed for both vertical and horizontal antenna polarization. The EUT was put into operation at receive mode, AV input mode, VCR playback mode and DVD play mode.

The radiated emission measurements were made with the following detector function of the test receiver.

Detector Type : QP (30-1000 MHz) / Ave. (1000-2000MHz)  
IF Bandwidth : 120 kHz / 1 MHz

## 8.5 Test result

### Passed

Please refer to summary of the test results in Appendix 2.

Test engineer : Hiroya Tabata



## **Section 9 : Antenna terminal voltage**

### **9.1 Operation environment**


The test was carried out in a screened room the size of 6 x 7 x 2.4 m, at Kanto office EMC laboratory.

Date : January 07, 2002  
Temperature : 22.0 °C  
Humidity : 35 %

### **9.2 Test configuration**

The EUT was placed on a non-metallic platform 0.8 m above a reference ground plane.  
A drawing of the set up is shown in figure 3 and photographs in Appendix 1.

**Figure 3. Antenna terminal voltage**

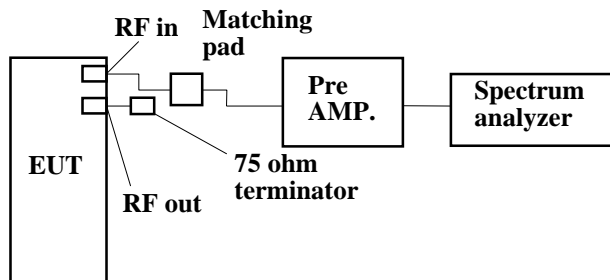

### **9.3 Test conditions**

Frequency range : 30 MHz – 2000 MHz  
EUT position : Table top

### **9.4 Test procedure**

Connect EUT and spectrum analyzer through pre-amplifier. Set EUT to CH investigation mode then measure the voltage of local leakage from antenna terminal. Spectrum analyzer should be hold in maximum mode during the measurement. Measurement should be performed for TV receiver mode and CATV receiver mode.

Detector Type : Peak (30-1000 MHz)

### **9.5 Test result**

#### **Passed**

Please refer to summary of the test results in Appendix 2.

Test engineer : Hisayuki Kioka

## **Section 10 : RF output level / spurious emission**

### **10.1 Operation environment**


The test was carried out in a screened room the size of 6 x 7 x 2.4 m, at Kanto office EMC laboratory.

Date : January 08, 2002  
Temperature : 25.0 °C  
Humidity : 31 %

### **10.2 Test configuration**

The EUT was placed on a non-metallic platform 0.8 m above a reference ground plane. A drawing of the set up is shown in figure 4 and photographs in Appendix 1.

**Figure 4. RF output level**

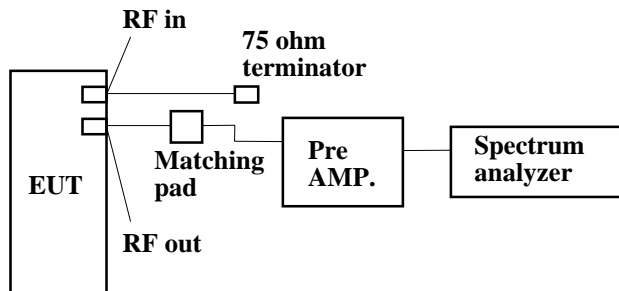

### **10.3 Test conditions**

EUT position : Table top

### **10.4 Test procedure**

EUT was connected spectrum analyzer through matching pad by accessory cable. RF channel selected 3 ch or 4 ch. Picture carrier, sound carrier and spurious levels are measured. Both sound carrier levels (upper and lower side bands) of modulator output are measured.

Detector Type : Peak

### **10.5 Test result**

#### **Passed**

Please refer to summary of the test results in Appendix 2.

Test engineer : Hisayuki Kioka

## **Section 11 : Antenna transfer switch**

### **11.1 Operation environment**


The test was carried out in a screened room the size of 6 x 7 x 2.4 m, at Kanto office EMC laboratory.

Date : January 08, 2002  
Temperature : 25.0 °C  
Humidity : 31 %

### **11.2 Test configuration**

The EUT was placed on a non-metallic platform 0.8 m above a reference ground plane. A drawing of the set up is shown in figure 5 and photographs in Appendix 1.

**Figure 5. Transfer switch**

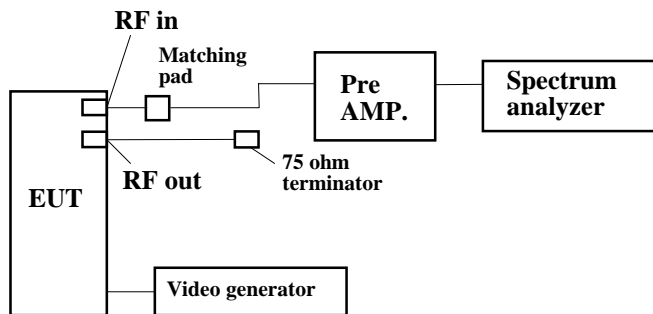

### **11.3 Test conditions**

EUT position : Table top

### **11.4 Test procedure**

EUT was connected spectrum analyzer through matching pad by accessory cable. RF channel selected 3 ch or 4 ch. The EUT exercised AV input mode, VCR playback mode and DVD play mode during the test, and interference signals were measured from RF input terminal.

Detector Type : Peak

### **11.5 Test result**

#### **Passed**

Please refer to summary of the test results in Appendix 2.

Test engineer : Hisayuki Kioka

## **Section 12 : Picture sensitivity**

### **12.1 Operation environment**


The test was carried out in a screened room the size of 6 x 7 x 2.4 m, at Kanto office EMC laboratory.

Date : January 08, 2002  
Temperature : 25.0 °C  
Humidity : 31 %

### **12.2 Test configuration**

The EUT was placed on a non-metallic platform 0.8 m above a reference ground plane.  
A drawing of the set up is shown in figure 6 and photographs in Appendix 1.

**Figure 6. Picture sensitivity**

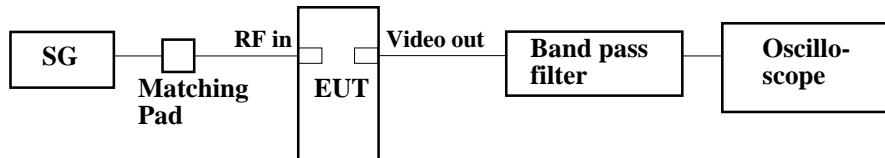

### **12.3 Test conditions**

EUT position : Table top

### **12.4 Test procedure**

Signal generator setup is as follows, (Example: 2ch – 55.25 MHz, AM, 1 kHz, 30 %)  
The EUT was tuned to appropriate channel.  
Output level of signal generator was adjusted to near the frequency output level of EUT output.  
EUT output level was adjusted to maximum output level by frequency adjustment of signal generator.  
Signal generator output level was adjusted to reference output level of EUT and output level had read.

### **12.5 Test result**

#### **Passed**

Please refer to summary of the test results in Appendix 2.

Test engineer : Hisayuki Kioka

## **Section 13 : Noise figure**

### **13.1 Operating environment**


The test was carried out in a screened room the size of 6 x 7 x 2.4 m, at Kanto office EMC laboratory.

Date : January 09, 2002  
Temperature : 22.8 °C  
Humidity : 26 %

### **13.2 Test configuration**

The EUT was placed on a non-metallic table.  
A drawing of the set up is shown in figure 7 and photographs in Appendix 1.

**Figure 7. Noise figure**

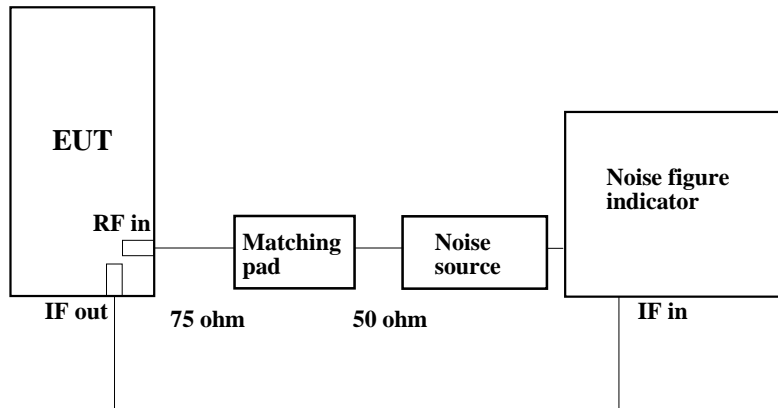

### **13.3 Test procedure**

This test should be performed in a shielded room or an low noise environment. Connect solid state noise source to antenna input terminal of EUT. Connect IF output terminal of EUT to noise meter through ceramic condenser. Measurement has been performed for VHF,UHF and receiver range.

### **13.4 Test result**

#### **Passed**

Please refer to summary of the test results in Appendix 2.

Test engineer : Hisayuki Kioka