



## **REGULATORY COMPLIANCE TEST REPORT**

**FCC CFR 47 15.247, RSS-247 Issue 2**

**Report No.: MIKO92-U2 Rev A**

**Company:** Mikrotiks SIA

**Model Name:** RBLHGG-5acD Wireless Module

## REGULATORY COMPLIANCE TEST REPORT

**Company:** Mikrotikls SIA

**Model Name:** RBLHGG-5acD Wireless Module

**To:** FCC CFR 47 Part 15 Subpart E 15.407, RSS-247 Issue 2

**Test Report Serial No.:** MIKO92-U2 Rev A

This report supersedes: NONE

**Applicant:** Mikrotikls SIA  
Brivibas gatve 214i  
Riga, LV-1039  
Latvia

**Issue Date:** 9<sup>th</sup> September 2019

### **This Test Report is Issued Under the Authority of:**

**MiCOM Labs, Inc.**  
575 Boulder Court  
Pleasanton California 94566  
USA  
Phone: +1 (925) 462-0304  
Fax: +1 (925) 462-0306  
[www.micomlabs.com](http://www.micomlabs.com)



**MiCOM Labs is an ISO 17025 Accredited Testing Laboratory**

## Table of Contents

<b>1. ACCREDITATION, LISTINGS &amp; RECOGNITION .....</b>	<b>5</b>
1.1. TESTING ACCREDITATION .....	5
1.2. RECOGNITION .....	6
1.3. PRODUCT CERTIFICATION .....	7
<b>2. DOCUMENT HISTORY .....</b>	<b>8</b>
<b>3. TEST RESULT CERTIFICATE .....</b>	<b>9</b>
<b>4. REFERENCES AND MEASUREMENT UNCERTAINTY .....</b>	<b>10</b>
4.1. Normative References .....	10
4.2. Test and Uncertainty Procedure .....	11
<b>5. PRODUCT DETAILS AND TEST CONFIGURATIONS .....</b>	<b>12</b>
5.1. Technical Details .....	12
5.2. Scope Of Test Program .....	13
5.3. Equipment Model(s) and Serial Number(s) .....	14
5.4. Antenna Details .....	14
5.5. Cabling and I/O Ports .....	14
5.6. Test Configurations .....	15
5.7. Equipment Modifications .....	15
5.8. Deviations from the Test Standard .....	15
<b>6. TEST SUMMARY .....</b>	<b>16</b>
<b>7. TEST EQUIPMENT CONFIGURATION(S) .....</b>	<b>17</b>
7.1. Conducted Test Setup .....	17
7.2. Radiated Emissions - 3m Chamber .....	19
7.3. Dynamic Frequency Selection (DFS) .....	21
<b>8. MEASUREMENT AND PRESENTATION OF TEST DATA .....</b>	<b>22</b>
<b>9. TEST RESULTS .....</b>	<b>23</b>
9.1. Peak Transmit Power .....	23
9.2. 26 dB & 99% Bandwidth .....	33
9.3. Power Spectral Density .....	42
9.4. Transmit Power Control (TPC) .....	52
9.5. Dynamic Frequency Selection (DFS) .....	
9.5.1. DFS Detection Thresholds .....	
9.5.2. Response Requirements .....	
9.5.3. Radar Test Waveforms .....	
9.5.3.1. Short Radar Pulses .....	
9.5.3.2. Long Radar Pulse Test .....	
9.5.3.3. Frequency Hopping Radar Test Waveform .....	
9.5.4. Radar Waveform Calibration .....	
9.5.5. Channel Availability Check .....	
9.5.5.4. Initial CAC .....	
9.5.5.5. Beginning CAC .....	
9.5.5.6. End CAC .....	
9.5.6. Channel Close / Transmission Time .....	
9.5.7. Non-Occupancy Period .....	
9.5.8. Probability of Detection .....	
9.5.9. Detection Bandwidth .....	
9.6. Radiated .....	
9.6.1. TX Spurious & Restricted Band Emissions .....	
9.6.1.7. Mikrotik RBLHGG-5acD-XL .....	
9.6.1.8. Mikrotik RBSXTsqG-5acD .....	
9.6.2. Edge & Band-Edge Emissions .....	

9.6.2.9. Mikrotik RBLHGG-5acD-XL .....	
9.6.2.10. Mikrotik RBSXTsqG-5acD .....	
9.6.3. <i>Digital Emissions</i> .....	
9.7. AC Wireline .....	
<b>A. APPENDIX - GRAPHICAL IMAGES .....</b>	<b>54</b>
A.1. 26 dB & 99% Bandwidth .....	55
A.2. Power Spectral Density .....	97
A.3. Probability of Detection – Radar Signatures.....	
A.4. Radiated.....	
A.4.1. <i>TX Spurious &amp; Restricted Band Emissions</i> .....	
A.4.1.1. Mikrotik RBLHGG-5acD-XL.....	
A.4.1.2. Mikrotik RBSXTsqG-5acD .....	
A.4.2. <i>Restricted Edge &amp; Band-Edge Emissions</i> .....	
A.4.2.3. Mikrotik RBLHGG-5acD-XL.....	
A.4.2.4. Mikrotik RBSXTsqG-5acD .....	
A.4.3. <i>Digital Emissions</i> .....	

## 1. ACCREDITATION, LISTINGS & RECOGNITION

### 1.1. TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard ISO/IEC 17025:2005. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



### Accredited Laboratory

A2LA has accredited

**MiCOM LABS**

Pleasanton, CA

for technical competence in the field of

**Electrical Testing**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 14<sup>th</sup> day of May 2018.



President and CEO  
For the Accreditation Council  
Certificate Number 2381.01  
Valid to November 30, 2019

*For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.*



## 1.2. RECOGNITION

MiCOM Labs, Inc has widely recognized wireless testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA countries. MiCOM Labs test reports are accepted globally.

Country	Recognition Body	Status	Phase	Identification No.
USA	Federal Communications Commission (FCC)	TCB	-	US0159 Listing #: 102167
Canada	Industry Canada (IC)	FCB	APEC MRA 2	US0159 Listing #: 4143A-2 4143A-3
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	APEC MRA 2	RCB 210
	VCCI	--	--	A-0012
Europe	European Commission	NB	EU MRA	NB 2280
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)	CAB	APEC MRA 1	
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)	CAB	APEC MRA 1	
Singapore	Infocomm Development Authority (IDA)	CAB	APEC MRA 1	
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)	CAB	APEC MRA 1	
Vietnam	Ministry of Communication (MIC)	CAB	APEC MRA 1	

EU MRA – European Union Mutual Recognition Agreement.

NB – Notified Body

APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement. Recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification



### 1.3. PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard ISO/IEC 17065:2012. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



United States of America – Telecommunication Certification Body (TCB)  
Industry Canada – Certification Body, CAB Identifier – US0159  
Europe – Notified Body (NB), NB Identifier - 2280  
Japan – Recognized Certification Body (RCB), RCB Identifier - 210

## 2. DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft	23 <sup>rd</sup> August 2019	Draft for comment This program adds DFS bands onto the non-DFS bands certified under MiCOM Labs MIKO60 test and certification program (October 2017)
Rev A	9 <sup>th</sup> September 2019	Initial Release
.		
.		
.		
.		
.		

In the above table the latest report revision will replace all earlier versions.



### 3. TEST RESULT CERTIFICATE

<b>Manufacturer:</b> Mikrotiks SIA Brivibas gatve 214i Riga LV-1039 Latvia	<b>Tested By:</b> MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
<b>Model:</b> RBLHGG-5acD Wireless Module	<b>Telephone:</b> +1 925 462 0304
<b>Equipment Type:</b> 802.11ac WLAN Wireless Module	<b>Fax:</b> +1 925 462 0306
<b>S/N's:</b> 80BA0913F70B/908 (Radiated), 9E6D0A956A0A/917 (Radiated), 80BA0968A2E5/908 (Conducted/DFS)	
<b>Test Date(s):</b> 19 <sup>th</sup> – 23 <sup>rd</sup> August 2019	<b>Website:</b> www.micomlabs.com

STANDARD(S)	TEST RESULTS
FCC CFR 47 Part 15 Subpart E 15.407	EQUIPMENT COMPLIES

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.


#### Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.


**Approved & Released for MiCOM Labs, Inc. by:**



Graeme Grieve  
Quality Manager MiCOM Labs, Inc.

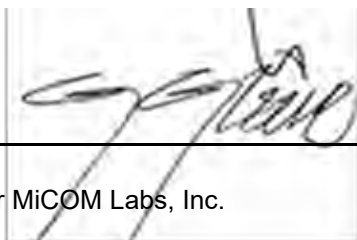

Gordon Hurst  
President & CEO MiCOM Labs, Inc.

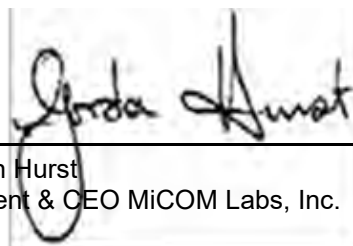

## 4. REFERENCES AND MEASUREMENT UNCERTAINTY

### 4.1. Normative References

REF.	PUBLICATION	YEAR	TITLE
I	KDB 662911 D01 & D02	Oct 31 2013	Guidance for measurement of output emission of devices that employ single transmitter with multiple outputs or systems with multiple transmitters operating simultaneously in the same frequency band
II	KDB 905462 D07 v02	22nd August 2016	Test guidance to demonstrate compliance for U-NII devices subject to DFS requirements.
III	KDB 926956 D01 v02	22nd August 2016	U-NII Device Transition Plan
IV	A2LA	August 2018	R105 - Requirement's When Making Reference to A2LA Accreditation Status
V	ANSI C63.10	2013	American National Standard for Testing Unlicensed Wireless Devices
VI	ANSI C63.4	2014	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
VII	CISPR 32	2015	Electromagnetic compatibility of multimedia equipment - Emission requirements
VIII	ETSI TR 100 028	2001-12	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
IX	FCC 06-96	Jun 30 2006	Memorandum Opinion and Order
X	FCC 47 CFR Part 15.407	2016	Radio Frequency Devices; Subpart E –Unlicensed National Information Infrastructure Devices
XI	ICES-003	Issue 6 Jan 2016; Updated April 2019	Information Technology Equipment (Including Digital Apparatus) – Limits and methods of measurement.
XII	M 3003	Edition 3 Nov.2012	Expression of Uncertainty and Confidence in Measurements
XIII	RSS-247 Issue 2	Feb 2017	Digital Transmission Systems (DTSSs), Frequency Hopping System (FHSs) and License-Exempt Local Area Network (LE-LEN) Devices
XIV	RSS-Gen Issue 5	March 2019 Amendment 1	General Requirements for Compliance of Radio Apparatus
XV	FCC 47 CFR Part 2.1033	2016	FCC requirements and rules regarding photographs and test setup diagrams.
XVI	KDB 905462 D02 v02	April 8 2016	Compliance Measurement Procedures for Unlicensed National Information Infrastructure devices operating in the 5250 to 5350 MHz and 5470 to 5725 MHz bands incorporating Dynamic Frequency Selection.
XVII	KDB 789033 D02 V02r01	14th December, 2017	Guidelines for Compliance Testing Of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E

## **4.2. Test and Uncertainty Procedure**

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor  $k = 2$ , providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

## 5. PRODUCT DETAILS AND TEST CONFIGURATIONS

### 5.1. Technical Details

Details	Description
Purpose:	Test of the Mikrotiks SIA RBLHGG-5acD Wireless Module to FCC CFR 47 Part 15 Subpart E 15.407. Compliance Measurement Procedures for Unlicensed National Information Infrastructure devices operating in the 5250 to 5350 MHz and 5470 to 5725 MHz bands incorporating Dynamic Frequency Selection.
Applicant:	Mikrotiks SIA Brivibas gatve 214i Riga LV-1039 Latvia
Manufacturer:	Mikrotiks SIA
Laboratory performing the tests:	MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
Test report reference number:	MIKO92-U2
Date EUT received:	14 <sup>th</sup> August 2019
Standard(s) applied:	FCC CFR 47 Part 15 Subpart E 15.407, RSS-247 Issue 2
Dates of test (from - to):	19 <sup>th</sup> –23 <sup>rd</sup> August 2019
No of Units Tested:	3
Product Family Name:	RouterBoard
Model(s):	RBLHGG-5acD Wireless Module
Location for use:	Indoor and Outdoor
Declared Frequency Range(s):	5250 - 5350 MHz; 5470 - 5725 MHz;
Modulation Type:	OFDM
EUT Modes of Operation:	802.11a; ac-80; HT-20; HT-40;
Declared Nominal Output Power (dBm):	+21 dBm
Rated Input Voltage and Current:	+24Vdc, 0.38A
Operating Temperature Range:	-40°C to +70°C
ITU Emission Designator:	802.11a: 16M9D1D 802.11ac-80: 77M3D1D 802.11n HT-20: 18M0D1D 802.11n HT-40: 37M0D1D
Equipment Dimensions:	70 x 16 x 17 mm
Weight:	50 g
Hardware Rev:	6.45.x
Software Rev:	6.45.3
Product Application:	Transmission of voice and data

## **5.2. Scope Of Test Program**

### **Mikrotikls SIA RBLHGG-5acD Wireless Module**

The scope of the test program was to test the Mikrotikls SIA RBLHGG-5acD Wireless Module, configurations in the frequency ranges 5250 - 5350 MHz; 5470 - 5725 MHz; for compliance against the following specification:

### **FCC CFR 47 Part 15 Subpart E 15.407**

Compliance Measurement Procedures for Unlicensed National Information Infrastructure devices operating in the 5250 to 5350 MHz and 5470 to 5725 MHz bands incorporating Dynamic Frequency Selection.

### **ISED RSS-247**

Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and License-Exempt Local Area Network (LE-LAN) Devices



### 5.3. Equipment Model(s) and Serial Number(s)

Type (EUT/Support)	Equipment Description	Manufacturer	Model No.	Serial No.
EUT Conducted & DFS	Wireless Module Host High gain	MikroTik	RBLHGG-5ac-XL	80BA0968A2E5/908
EUT Radiated	Wireless Module Host High gain	MikroTik	RBLHGG-5ac-XL	80BA0913F70B/908
EUT Radiated	Wireless Module Host Low gain	MikroTik	RBSXTsqG-5acD	9E6D0A956A0A/917
Support	Laptop	HP	--	--
Support	Test Equipment	MiCOM Labs	MiTest	ML512

### 5.4. Antenna Details

Type	Manufacturer	Model	Family	Gain (dBi)	BF Gain	Dir BW	X-Pol	Frequency Band (MHz)
integral	Mikrotik	RBLDFG-5acD	Dual Polarity, Directional	9.0	-	360	-	5250 - 5725
integral	Mikrotik	RBSXTsqG-5acD	Dual Polarity, Directional	16.0	-	360	-	
integral	Mikrotik	RBDiscG-5acD	Parabolic Dish	21.0	-	360	-	
integral	Mikrotik	RBLHGG-5acD	Parabolic Dish	24.5	-	360	-	
integral	Mikrotik	RBLHGG-5acD-XL	Parabolic Dish	27.0	-	360	-	
BF Gain - Beamforming Gain Dir BW - Directional BeamWidth X-Pol - Cross Polarization								

### 5.5. Cabling and I/O Ports

Port Type	Max Cable Length	# of Ports	Screened	Connector Type	Data Type	Data Rate(s)
Ethernet PoE IN	>30m	1	No	RJ45	Packet	10,100,1000

## 5.6. Test Configurations

Results for the following configurations are provided in this report:

Operational Mode(s) (802.11a/b/g/n/ac)	Data Rate with Highest Power MBit/s	Channel Frequency (MHz)		
		Low	Mid	High
5250 - 5350 MHz				
a	6	5,260.00	5,300.00	5,320.00
ac-80	29.3	--	--	5,290.00
HT-20	6.5	5,260.00	5,300.00	5,320.00
HT-40	13.5	5,270.00	--	5,310.00
5470 - 5725 MHz				
a	6	5,500.00	5,580.00	5,720.00
ac-80	29.3	5,530.00	5,610.00	5,690.00
HT-20	6.5	5,500.00	5,580.00	5,720.00
HT-40	13.5	5,510.00	5,550.00	5,710.00

## 5.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. NONE

## 5.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE

## 6. TEST SUMMARY


### List of Measurements

Test Header	Result	Data Link
Peak Transmit Power	Complies	<a href="#">View Data</a>
26 dB & 99% Bandwidth	Complies	<a href="#">View Data</a>
Power Spectral Density	Complies	<a href="#">View Data</a>
Transmit Power Control (TPC)	Complies	<a href="#">View Data</a>
Dynamic Frequency Selection (DFS)	Complies	See Document Part 2 of 3
Channel Availability Check	Complies	
Initial CAC	Complies	
Beginning CAC	Complies	
End CAC	Complies	
Channel Close / Transmission Time	Complies	
Non-Occupancy Period	Complies	
Probability of Detection	Complies	
Detection Bandwidth	Complies	
Radiated	Complies	See Document Part 3 of 3
TX Spurious & Restricted Band Emissions	Complies	
Mikrotik RBLHGG-5acD-XL	Complies	
Mikrotik RBSXTsqG-5acD	Complies	
Restricted Edge & Band-Edge Emissions	Complies	
Mikrotik RBLHGG-5acD-XL	Complies	
Mikrotik RBSXTsqG-5acD	Complies	
Digital Emissions	Complies	
AC Wireline	Complies	See Document Part 3 of 3

## 7. TEST EQUIPMENT CONFIGURATION(S)

### 7.1. Conducted Test Setup

MiTest Automated Test System

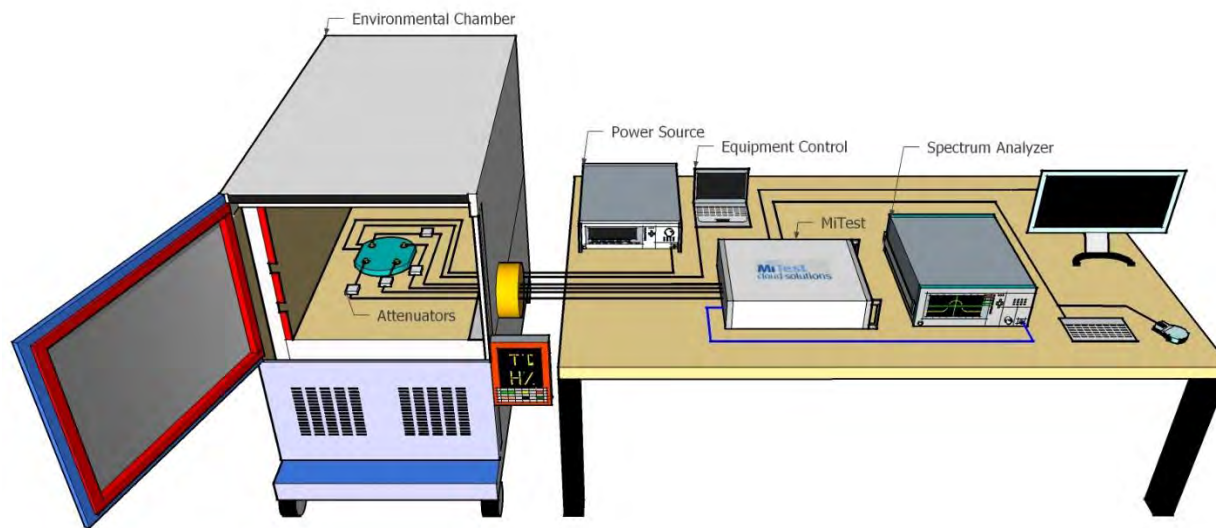

A full system calibration was performed on the test station and any resulting system losses (or gains) were considered in the production of all final measurement data.

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
#3 SA	MiTest Box to SA	Fairview Microwave	SCA1814-0101-72	#3 SA	20 Sep 2019
#3P1	EUT to MiTest box port 1	Fairview Microwave	SCA1814-0101-72	#3P1	20 Sep 2019
#3P2	EUT to MiTest box port 2	Fairview Microwave	SCA1814-0101-72	#3P2	20 Sep 2019
#3P3	EUT to MiTest box port 3	Fairview Microwave	SCA1814-0101-72	#3P3	20 Sep 2019
#3P4	EUT to MiTest box port 4	Fairview Microwave	SCA1812-0101-72	#3P4	20 Sep 2019
249	Resistance Thermometer	Thermotronics	GR2105-02	9340 #2	30 Oct 2019
361	Desktop for RF#1, Labview Software installed	Dell	Vostro 220	WS RF#1	Not Required
378	Rohde & Schwarz 40 GHz Receiver with Generator	Rhode & Schwarz	ESIB40	100107/040	12 Oct 2019
398	MiTest RF Conducted Test Software	MiCOM	MiTest ATS	Version 4.1	Not Required
405	DC Power Supply 0-60V	Agilent	6654A	MY4001826	Cal when used
408	USB to GPIB interface	National Instruments	GPIB-USB HS	14C0DE9	Not Required


436	USB Wideband Power Sensor	Boonton	55006	8731	14 Sep 2019
440	USB Wideband Power Sensor	Boonton	55006	9178	22 Sep 2019
441	USB Wideband Power Sensor	Boonton	55006	9179	20 Sep 2019
442	USB Wideband Power Sensor	Boonton	55006	9181	6 Oct 2019
445	PoE Injector	D-Link	DPE-101GL	QTAH1E2000625	Not Required
510	Barometer/Thermometer	Control Company	68000-49	170871375	11 Dec 2019
515	MiTest Cloud Solutions RF Test Box	MiCOM	2nd Gen with DFS	515	20 Sep 2019
75	Environmental Chamber	Theratron	SE-300-2-2	27946	24 Feb 2020




## 7.2. Radiated Emissions - 3m Chamber

The following tests were performed using the radiated test set-up shown in the diagram below.  
Radiated emissions above and below 1GHz.

Radiated Emissions Above 1GHz Test Setup

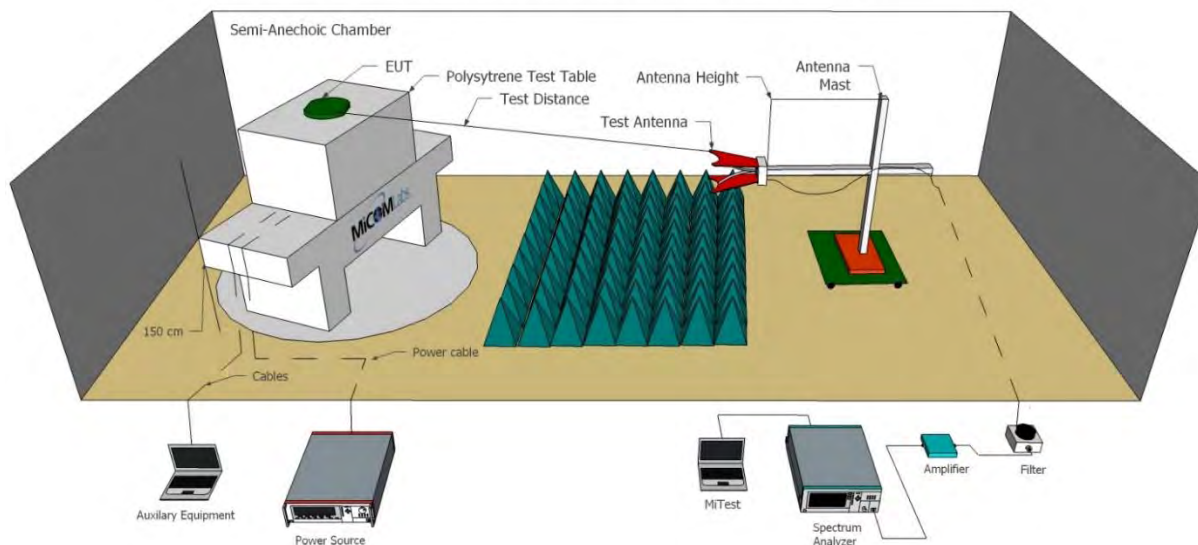

Radiated Emissions Below 1GHz Test Setup

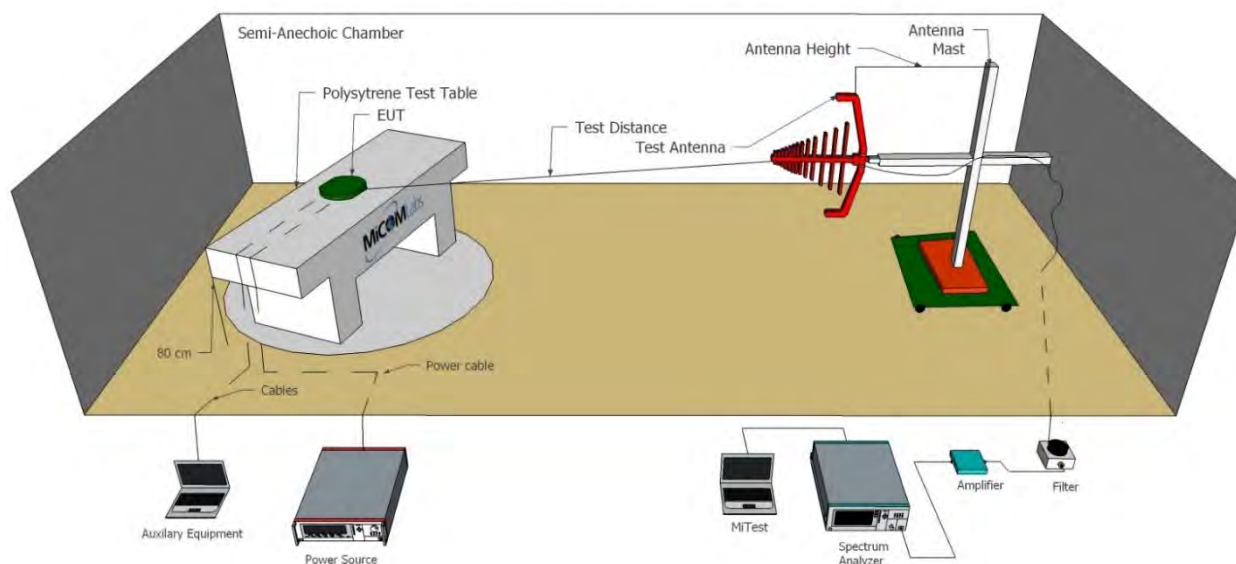


A full system calibration was performed on the test station and any resulting system losses (or gains) were considered in the production of all final measurement data.

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
170	Video System Controller for Semi Anechoic Chamber	Panasonic	WV-CU101	04R08507	Not Required
298	3M Radiated Emissions Chamber Maintenance Check	MiCOM	3M Chamber	298	21 Apr 2020
336	Active Loop Antenna	Emco	6502	00060498	29 Nov 2019
338	Sunol 30 to 3000 MHz Antenna	Sunol	JB3	A052907	4 Apr 2020
378	Rohde & Schwarz 40 GHz Receiver with Generator	Rhode & Schwarz	ESIB40	100107/040	12 Oct 2019
397	Amp 10 - 2500MHz	MiCOM Labs	Amp 10 - 2500 MHz	NA	12 Apr 2020
399	ETS 1-18 GHz Horn Antenna	ETS	3117	00154575	12 Oct 2019
406	Amplifier for Radiated Emissions	MiCOM Labs	40dB 1 to 18GHz Amp	0406	12 Apr 2020
410	Desktop Computer	Dell	Inspiron 620	WS38	Not Required
411	Mast/Turntable Controller	Sunol Sciences	SC98V	060199-1D	Not Required
412	USB to GPIB Interface	National Instruments	GPIB-USB HS	11B8DC2	Not Required
413	Mast Controller	Sunol Science	TWR95-4	030801-3	Not Required
415	Turntable Controller	Sunol Sciences	Turntable Controller	None	Not Required
416	Gigabit ethernet filter	ETS-Lingren	Gigafoil 260366	None	Not Required
447	MiTest Rad Emissions Test Software	MiCOM	Rad Emissions Test Software Version 1.0	447	Not Required
462	Schwarzbeck cable from Antenna to Amplifier.	Schwarzbeck	AK 9513	462	9 Oct 2019
463	Schwarzbeck cable from Amplifier to Bulkhead.	Schwarzbeck	AK 9513	463	9 Oct 2019
464	Schwarzbeck cable from Bulkhead to Receiver	Schwarzbeck	AK 9513	464	9 Oct 2019
465	Low Pass Filter DC-1000 MHz	Mini-Circuits	NLP-1200+	VUU01901402	9 Oct 2019
480	Cable - Bulkhead to Amp	SRC Haverhill	157-3050360	480	24 Aug 2019
481	Cable - Bulkhead to Receiver	SRC Haverhill	151-3050787	481	24 Aug 2019
510	Barometer/Thermometer	Control Company	68000-49	170871375	11 Dec 2019
518	Cable - Amp to Antenna	SRC Haverhill	157-3051574	518	24 Aug 2019

### 7.3. Dynamic Frequency Selection (DFS)

Setup for Radiated DFS testing in 3 m chamber where the EUT is the Client device communicating with Master device over the air. Radar Test Waveforms are injected from the MiTest equipment and detected by the Master.

#### Dynamic Frequency Selection (DFS) - Radiated

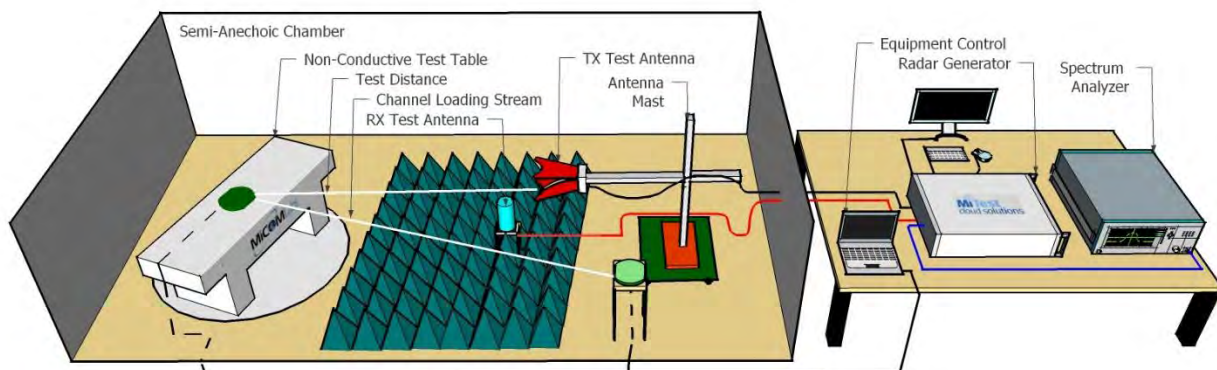

A full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
0507	Power Meter EPM Series	Agilent	E4418B	MY40511221	20 Oct 2019
104	Antenna Horn 1-18GHz	Electro-Mechanics	3115	9205-3882	28 Sep 2019
117	Low Power Sensor - 70dBm to -20dBm 50 MHz - 50GHz	HP	8487D	3318A00371	21 Sep 2019
207	Radiated Immunity Chamber Maintenance Check	MiCOM	Rad Imm Chamber	207	18 Sep 2019
444	SMA Cable Assembly	ETS-Lindgren	RFC-NMS-100-SMS-256 IN	001	Cal when used
510	Barometer/Thermometer	Control Company	68000-49	170871375	11 Dec 2019
71	Spectrum Analyser 9KHz-50GHz	HP	8565E	3425A00181	18 Sep 2019
DFS PCIe#1	PCIe cable for Aeroflex	National Instruments	PCIe cable	None	Not Required
512	MiTest DFS Test System	MiCOM Labs Inc.	MiTest	3C:FD:FE:9F:B4:58	15 Sep 2019



## 8. MEASUREMENT AND PRESENTATION OF TEST DATA

The measurement and graphical data presented in this test report was generated automatically using state-of-the-art technology creating an easy to read report structure. Numerical measurement data is separated from supporting graphical data (plots) through hyperlinks. Numerical measurement data can be reviewed without scrolling through numerous graphical pages to arrive at the next data matrix.

Plots have been relegated into the Appendix 'Graphical Data'.

Test and report automation was performed by [MiTest](#). [MiTest](#) is an automated test system developed by MiCOM Labs. [MiTest](#) is the first cloud based modular test system enabling end-to-end automation of regulatory compliance testing for conducted RF testing.



The MiCOM Labs "[MiTest](#)" Automated Test System" (Patent Pending)

## 9. TEST RESULTS

### 9.1. Peak Transmit Power

Conducted Test Conditions for Maximum Conducted Output Power			
<b>Standard:</b>	FCC CFR 47:15.407	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	Maximum Conducted Output Power	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.407 (a)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

#### Test Procedure for Maximum Conducted Output Power Measurement

Method PM (Measurement using an RF average power meter). KDB 789033 defines a methodology using an average wideband power meter. Measurements were made while the EUT was operating in a continuous transmission mode (100% duty cycle) at the appropriate center frequency. All operational modes and frequency bands were measured independently and the resultant calculated. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported separately. A summation ( $\Sigma$ ) of each antenna port output power is provided which includes any offset due to Duty Cycle Correction Factor (DCCF). Testing was performed under ambient conditions at nominal voltage.

Test configuration and setup used for the measurement was per the Conducted Test Set-up section specified in this document.

Supporting Information

Calculated Power =  $A + G + Y + 10 \log (1/x)$  dBm

$A$  = Total Power [ $10 \cdot \log_{10} (10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})$ ]

$G$  = Antenna Gain

$Y$  = Beamforming Gain

$x$  = Duty Cycle (average power measurements only)

#### Limits Maximum Conducted Output Power

#### Operating Frequency Band 5150-5250 MHz

15.407 (a)(1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are



used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**Operating Frequency Band 5250-5350 and 5470 – 5725 MHz**

15. 407 (a)(2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**Operating Frequency Band 5725 – 5850 MHz**

15. 407 (a)(3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

#### Equipment Configuration for Peak Transmit Power

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	98.0
<b>Data Rate:</b>	6.00 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	JK
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Test Measurement Results									
Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5260.0	14.58	15.61	--	--	18.14	26.270	21.00	-2.86	
5300.0	14.93	16.20	--	--	18.62	27.530	21.00	-2.38	
5320.0	15.52	16.32	--	--	18.95	26.130	21.00	-2.05	

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

<b>Variant:</b>	802.11ac-80	<b>Duty Cycle (%):</b>	98.0
<b>Data Rate:</b>	29.30 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	JK
<b>Engineering Test Notes:</b>			

Test Measurement Results									
Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5290.0	13.45	14.29	--	--	16.90	112.800	21.00	-4.10	24.00

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

#### Equipment Configuration for Peak Transmit Power

<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	98.0
<b>Data Rate:</b>	6.50 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	JK
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Test Measurement Results									
Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5260.0	14.68	15.56	--	--	18.15	30.070	21.00	-2.85	
5300.0	14.84	16.14	--	--	18.55	24.470	21.00	-2.45	
5320.0	15.51	16.23	--	--	18.90	26.270	21.00	-2.10	

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

#### Equipment Configuration for Peak Transmit Power

<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	98.0
<b>Data Rate:</b>	13.50 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	JK
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Test Measurement Results									
Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5270.0	14.51	15.61	--	--	18.11	55.730	21.00	-2.89	
5310.0	14.95	15.94	--	--	18.48	56.930	21.00	-2.52	

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.



#### Equipment Configuration for Peak Transmit Power

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	98.0
<b>Data Rate:</b>	6.00 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	JK
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Test Measurement Results									
Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5500.0	14.40	13.25	--	--	16.87	21.600	21.00	-4.13	
5580.0	13.30	12.80	--	--	16.07	21.800	21.00	-4.93	
5720.0	12.56	13.46	--	--	16.04	24.800	21.00	-4.96	

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

#### Equipment Configuration for Peak Transmit Power

<b>Variant:</b>	802.11ac-80	<b>Duty Cycle (%):</b>	98.0
<b>Data Rate:</b>	29.30 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	JK
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Test Measurement Results									
Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5530.0	11.96	11.23	--	--	14.62	87.730	21.00	-6.38	
5610.0	10.92	10.45	--	--	13.70	88.270	21.00	-7.30	
5690.0	10.62	11.39	--	--	14.03	88.800	21.00	-6.97	

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

#### Equipment Configuration for Peak Transmit Power

<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	98.0
<b>Data Rate:</b>	6.50 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	JK
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Test Measurement Results									
Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5500.0	14.19	13.29	--	--	16.77	22.200	21.00	-4.23	
5580.0	13.33	12.91	--	--	16.14	22.000	21.00	-4.86	
5720.0	12.71	13.49	--	--	16.13	23.270	21.00	-4.87	

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

#### Equipment Configuration for Peak Transmit Power

<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	98.0
<b>Data Rate:</b>	13.50 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	JK
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Test Measurement Results									
Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5510.0	13.97	12.98	--	--	16.51	43.870	21.00	-4.49	
5550.0	13.43	12.80	--	--	16.14	44.400	21.00	-4.86	
5710.0	12.23	13.46	--	--	15.90	45.600	21.00	-5.10	

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

## 9.2. 26 dB & 99% Bandwidth

Conducted Test Conditions for 26 dB and 99% Bandwidth			
Standard:	FCC CFR 47:15.407	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	26 dB and 99 % Bandwidth	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.407 (a)	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		
<b>Test Procedure for 26 dB and 99% Bandwidth Measurement</b> The bandwidth at 26 dB and 99 % is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency. The Resolution Bandwidth was set to approximately 1% of the emission bandwidth. Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported.  Test configuration and setup used for the measurement was per the Conducted Test Set-up section specified in this document.			



#### Equipment Configuration for 26 dB & 99% Occupied Bandwidth

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	98.0
<b>Data Rate:</b>	6.00 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	JK
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)	
	Port(s)					
MHz	a	b	c	d	Highest	Lowest
5260.0	<a href="#">26.270</a>	<a href="#">28.200</a>	---	---	28.200	26.270
5300.0	<a href="#">27.600</a>	<a href="#">27.530</a>	---	---	27.600	27.530
5320.0	<a href="#">26.200</a>	<a href="#">26.130</a>	---	---	26.200	26.130
Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)	
	Port(s)					
MHz	a	b	c	d	Highest	Lowest
5260.0	<a href="#">16.749</a>	<a href="#">16.875</a>	---	---	16.875	16.749
5300.0	<a href="#">16.789</a>	<a href="#">16.829</a>	---	---	16.829	16.789
5320.0	<a href="#">16.839</a>	<a href="#">16.796</a>	---	---	16.839	16.796

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

#### Equipment Configuration for 26 dB & 99% Occupied Bandwidth

<b>Variant:</b>	802.11ac-80	<b>Duty Cycle (%):</b>	98.0
<b>Data Rate:</b>	29.30 MBit/s	<b>Antenna Gain (dBi):</b>	9.0
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	JK
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)	
	Port(s)				Highest	Lowest
MHz	a	b	c	d		
5290.0	<a href="#">123.730</a>	<a href="#">112.800</a>	--	--	123.730	112.800
Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)	
	Port(s)				Highest	Lowest
MHz	a	b	c	d		
5290.0	<a href="#">77.283</a>	<a href="#">77.007</a>	--	--	77.283	77.007

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

#### Equipment Configuration for 26 dB & 99% Occupied Bandwidth

<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	98.0
<b>Data Rate:</b>	6.50 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	JK
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)	
	Port(s)					
MHz	a	b	c	d	Highest	Lowest
5260.0	<a href="#">31.200</a>	<a href="#">30.070</a>	--	--	31.200	30.070
5300.0	<a href="#">24.470</a>	<a href="#">28.670</a>	--	--	28.670	24.470
5320.0	<a href="#">26.270</a>	<a href="#">27.470</a>	--	--	27.470	26.270
Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)	
	Port(s)					
MHz	a	b	c	d	Highest	Lowest
5260.0	<a href="#">17.962</a>	<a href="#">18.067</a>	--	--	18.067	17.962
5300.0	<a href="#">18.049</a>	<a href="#">18.028</a>	--	--	18.049	18.028
5320.0	<a href="#">18.004</a>	<a href="#">17.934</a>	--	--	18.004	17.934

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

#### Equipment Configuration for 26 dB & 99% Occupied Bandwidth

<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	98.0
<b>Data Rate:</b>	13.50 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	JK
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)	
	Port(s)					
MHz	a	b	c	d	Highest	Lowest
5270.0	<a href="#">55.730</a>	<a href="#">67.600</a>	--	--	67.600	55.730
5310.0	<a href="#">56.930</a>	<a href="#">65.200</a>	--	--	65.200	56.930
Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)	
	Port(s)					
MHz	a	b	c	d	Highest	Lowest
5270.0	<a href="#">37.173</a>	<a href="#">37.040</a>	--	--	37.173	37.040
5310.0	<a href="#">36.998</a>	<a href="#">36.903</a>	--	--	36.998	36.903

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

#### Equipment Configuration for 26 dB & 99% Occupied Bandwidth

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	98.0
<b>Data Rate:</b>	6.00 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	JK
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)	
	Port(s)					
MHz	a	b	c	d	Highest	Lowest
5500.0	<a href="#">21.600</a>	<a href="#">22.000</a>	--	--	22.000	21.600
5580.0	<a href="#">21.870</a>	<a href="#">21.800</a>	--	--	21.870	21.800
5720.0	<a href="#">24.800</a>	<a href="#">27.800</a>	--	--	27.800	24.800
Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)	
	Port(s)					
MHz	a	b	c	d	Highest	Lowest
5500.0	<a href="#">16.672</a>	<a href="#">16.578</a>	--	--	16.672	16.578
5580.0	<a href="#">16.620</a>	<a href="#">16.553</a>	--	--	16.620	16.553
5720.0	<a href="#">16.591</a>	<a href="#">16.702</a>	--	--	16.702	16.591

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).



#### Equipment Configuration for 26 dB & 99% Occupied Bandwidth

<b>Variant:</b>	802.11ac-80	<b>Duty Cycle (%):</b>	98.0
<b>Data Rate:</b>	29.30 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	JK
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)	
	Port(s)					
MHz	a	b	c	d	Highest	Lowest
5530.0	<a href="#">87.730</a>	<a href="#">89.070</a>	--	--	89.070	87.730
5610.0	<a href="#">89.330</a>	<a href="#">88.270</a>	--	--	89.330	88.270
5690.0	<a href="#">89.600</a>	<a href="#">88.800</a>	--	--	89.600	88.800
Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)	
	Port(s)					
MHz	a	b	c	d	Highest	Lowest
5530.0	<a href="#">76.546</a>	<a href="#">76.610</a>	--	--	76.610	76.546
5610.0	<a href="#">76.684</a>	<a href="#">76.602</a>	--	--	76.684	76.602
5690.0	<a href="#">76.855</a>	<a href="#">76.595</a>	--	--	76.855	76.595

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

#### Equipment Configuration for 26 dB & 99% Occupied Bandwidth

<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	98.0
<b>Data Rate:</b>	6.50 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	JK
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)	
	Port(s)					
MHz	a	b	c	d	Highest	Lowest
5500.0	<a href="#">23.400</a>	<a href="#">22.200</a>	--	--	23.400	22.200
5580.0	<a href="#">22.800</a>	<a href="#">22.000</a>	--	--	22.800	22.000
5720.0	<a href="#">23.270</a>	<a href="#">27.000</a>	--	--	27.000	23.270
Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)	
	Port(s)					
MHz	a	b	c	d	Highest	Lowest
5500.0	<a href="#">17.887</a>	<a href="#">17.745</a>	--	--	17.887	17.745
5580.0	<a href="#">17.761</a>	<a href="#">17.739</a>	--	--	17.761	17.739
5720.0	<a href="#">17.762</a>	<a href="#">17.882</a>	--	--	17.882	17.762

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

#### Equipment Configuration for 26 dB & 99% Occupied Bandwidth

<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	98.0
<b>Data Rate:</b>	13.50 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	JK
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)	
	Port(s)					
MHz	a	b	c	d	Highest	Lowest
5510.0	<a href="#">44.930</a>	<a href="#">43.870</a>	--	--	44.930	43.870
5550.0	<a href="#">44.400</a>	<a href="#">44.400</a>	--	--	44.400	44.400
5710.0	<a href="#">45.600</a>	<a href="#">54.670</a>	--	--	54.670	45.600
Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)	
	Port(s)					
MHz	a	b	c	d	Highest	Lowest
5510.0	<a href="#">36.632</a>	<a href="#">36.643</a>	--	--	36.643	36.632
5550.0	<a href="#">36.713</a>	<a href="#">36.573</a>	--	--	36.713	36.573
5710.0	<a href="#">36.873</a>	<a href="#">36.908</a>	--	--	36.908	36.873

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

### 9.3. Power Spectral Density

Conducted Test Conditions for Power Spectral Density			
<b>Standard:</b>	FCC CFR 47:15.407	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	Power Spectral Density	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.407 (a)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

#### Test Procedure for Power Spectral Density

The in-band power spectral density was measured using the test technique specified in KDB 789033. A 1 MHz measurement bandwidth was implemented for the analyzer sweep. Once the sweep is complete the analyzer trace data is downloaded and used for post processing purposes.

Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured separately. The Peak Power Spectral Density is the highest level found across the emission bandwidth. With multiple antenna port measurements the numerical analyzer data from each port is summed (à) and a link to this additional graphic is provided.

Test configuration and setup used for the measurement was per the Conducted Test Set-up section specified in this document.

Measure and sum the spectra across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The individual spectra are then summed mathematically in linear power units. Unlike in-band power measurements, in which the sum involves a single measured value (output power) from each output, measurements for compliance with PSD limits involve summing entire spectra across corresponding frequency bins on the various outputs. Consistency is maintained for any device with multiple transmitter outputs to be certain the individual outputs are all aligned with the same span and same number of points. In this instance, the linear power spectrum value within the first spectral bin of output 0 is summed with that in the first spectral bin of output 1, and the first spectral bin of output 2, and so on up to the Nth output to obtain the true value for the first frequency bin of the summed spectrum. The summed spectrum value for each frequency bin is computed in this fashion. These summed spectral values were post processed and the resulting numerical and graphical data presented.

NOTE: It may be observed that spectrum in some plots break the limit line however this in itself does NOT constitute a failure. In all cases a spectrum summation plot is provided in order to prove compliance. A failure occurs only after the summation of all spectrum plots have been summed and are found to be greater than the limit line.

#### Supporting Information

Calculated Power =  $A + 10 \log (1/x)$  dBm

A = Total Power Spectral Density [ $10 \cdot \log_{10} (10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})$ ]

x = Duty Cycle

#### Limits Power Spectral Density

##### Operating Frequency Band 5150-5250 MHz

##### 15.407 (a)(1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any

corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **Operating Frequency Band 5250-5350 and 5470 – 5725 MHz**

##### **15. 407 (a)(2)**

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **Operating Frequency Band 5725 – 5850 MHz**

##### **15. 407 (a)(3)**

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.



#### Equipment Configuration for Power Spectral Density

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	98.0
<b>Data Rate:</b>	6.00 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	JK
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Test Measurement Results							
Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.09 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5260.0	<a href="#">3.518</a>	<a href="#">4.022</a>	---	---	<a href="#">6.766</a>	8.0	-1.2
5300.0	<a href="#">3.889</a>	<a href="#">4.622</a>	---	---	<a href="#">7.327</a>	8.0	-0.7
5320.0	<a href="#">4.651</a>	<a href="#">4.977</a>	---	---	<a href="#">7.770</a>	8.0	-0.2

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

#### Equipment Configuration for Power Spectral Density

<b>Variant:</b>	802.11ac-80	<b>Duty Cycle (%):</b>	98.0
<b>Data Rate:</b>	29.30 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	JK
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Post-Measurement Results							
Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.09 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5290.0	-3.223	-3.027	--	--	-0.495	8.0	-8.5

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

#### Equipment Configuration for Power Spectral Density

<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	98.0
<b>Data Rate:</b>	6.50 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	JK
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.09 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5260.0	<a href="#">3.422</a>	<a href="#">3.918</a>	---	---	<a href="#">6.623</a>	8.0	-1.4
5300.0	<a href="#">3.761</a>	<a href="#">4.467</a>	---	---	<a href="#">7.153</a>	8.0	-0.9
5320.0	<a href="#">4.423</a>	<a href="#">4.395</a>	---	---	<a href="#">7.324</a>	8.0	-0.7

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

#### Equipment Configuration for Power Spectral Density

<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	98.0
<b>Data Rate:</b>	13.50 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	JK
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Test Measurement Results							
Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.09 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5270.0	<a href="#">0.535</a>	<a href="#">0.804</a>	--	--	<a href="#">3.620</a>	8.0	-4.4
5310.0	<a href="#">0.981</a>	<a href="#">1.189</a>	--	--	<a href="#">4.067</a>	8.0	-3.9

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

#### Equipment Configuration for Power Spectral Density

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	98.0
<b>Data Rate:</b>	6.00 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	JK
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Test Measurement Results							
Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.09 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5500.0	<a href="#">3.465</a>	<a href="#">1.703</a>	---	---	<a href="#">5.540</a>	8.0	-2.5
5580.0	<a href="#">2.794</a>	<a href="#">1.629</a>	---	---	<a href="#">5.264</a>	8.0	-2.7
5720.0	<a href="#">1.724</a>	<a href="#">2.055</a>	---	---	<a href="#">4.759</a>	8.0	-3.3

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).



#### Equipment Configuration for Power Spectral Density

<b>Variant:</b>	802.11ac-80	<b>Duty Cycle (%):</b>	98.0
<b>Data Rate:</b>	29.30 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	JK
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Test Measurement Results							
Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.09 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5530.0	<a href="#">-4.930</a>	<a href="#">-6.266</a>	---	---	<a href="#">-2.512</a>	8.0	-10.5
5610.0	<a href="#">-6.407</a>	<a href="#">-7.104</a>	---	---	<a href="#">-3.717</a>	8.0	-11.7
5690.0	<a href="#">-6.425</a>	<a href="#">-6.205</a>	---	---	<a href="#">-3.474</a>	8.0	-11.5

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

#### Equipment Configuration for Power Spectral Density

<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	98.0
<b>Data Rate:</b>	6.50 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	JK
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Test Measurement Results							
Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.09 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5500.0	<a href="#">2.446</a>	<a href="#">1.547</a>	--	--	<a href="#">4.797</a>	8.0	-3.2
5580.0	<a href="#">2.321</a>	<a href="#">1.473</a>	--	--	<a href="#">4.899</a>	8.0	-3.1
5720.0	<a href="#">1.613</a>	<a href="#">1.754</a>	--	--	<a href="#">4.675</a>	8.0	-3.3

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

#### Equipment Configuration for Power Spectral Density

<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	98.0
<b>Data Rate:</b>	13.50 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	JK
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Test Measurement Results							
Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.09 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5510.0	<a href="#">-0.552</a>	<a href="#">-1.497</a>	---	---	<a href="#">1.760</a>	8.0	-6.3
5550.0	<a href="#">-0.678</a>	<a href="#">-1.674</a>	---	---	<a href="#">1.847</a>	8.0	-6.2
5710.0	<a href="#">-1.751</a>	<a href="#">-1.226</a>	---	---	<a href="#">1.510</a>	8.0	-6.5

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

## 9.4. Transmit Power Control (TPC)

Conducted Test Conditions for Maximum Conducted Output Power			
<b>Standard:</b>	FCC CFR 47:15.407	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	Transmit Power Control (TPC)	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.407 (h)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

### Requirement for TPC


Transmit power control (TPC). U-NII devices operating in the 5.25-5.35 GHz band and the 5.47-5.725 GHz band shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm. A TPC mechanism is not required for systems with an e.i.r.p. of less than 500 mW.

### Test Procedure for TPC

The TPC mechanism is demonstrated by setting the U-NII device in normal operation mode, connecting it with a client device and loading the channel per the DFS requirements. The U-NII device is monitored by a spectrum analyzer set with a span wide enough to capture the entire channel, the RBW and VBW set to 1 MHz with an adequate sweep time to fill out the trace. A trace is captured with the U-NII device operating at maximum power output using Trace 1, then power is reduced, and a trace captured using Trace 2. Markers at the same frequency on each trace demonstrate the delta power level.

#### Equipment Configuration for Transmit Power Control (TPC)

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	17.0
<b>Data Rate:</b>	6.00 MBit/s	<b>Antenna Gain (dBi):</b>	9.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	JK
<b>Engineering Test Notes:</b>			

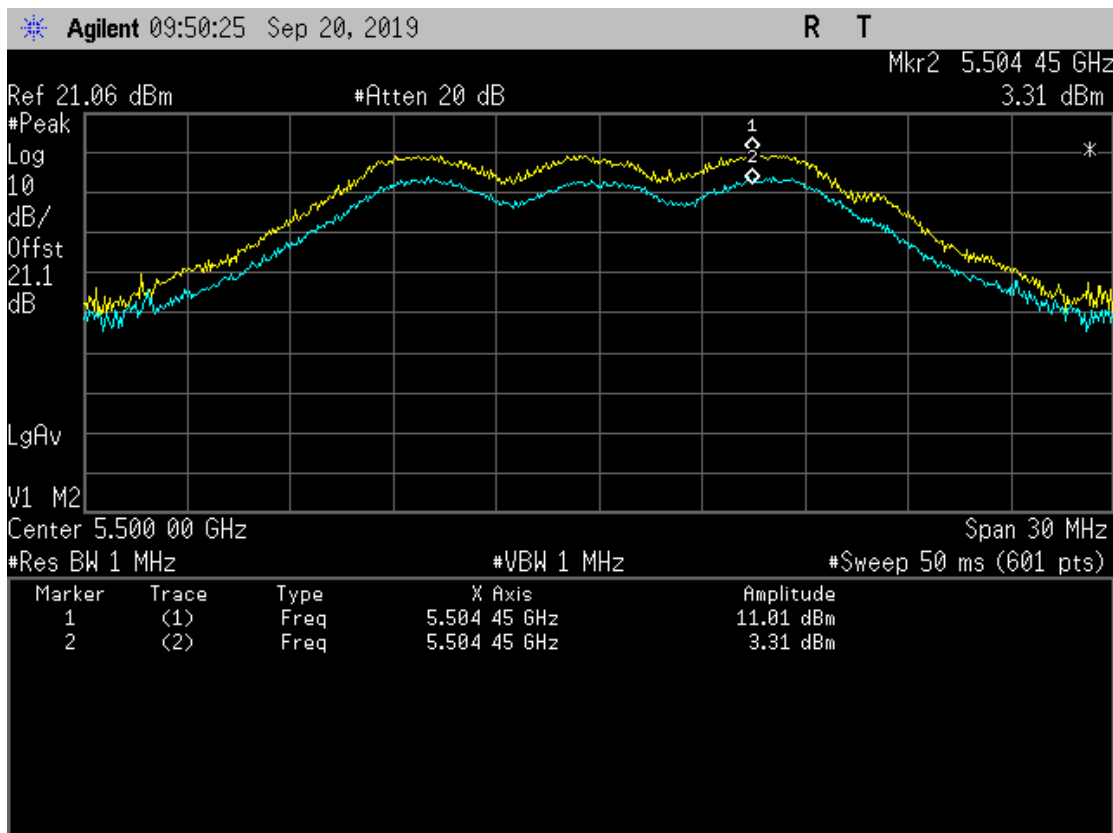

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

## **A. APPENDIX - GRAPHICAL IMAGES**




## A.1. 26 dB & 99% Bandwidth



### 26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5260.00 MHz, Chain a, Temp: 20, Voltage: Vdc

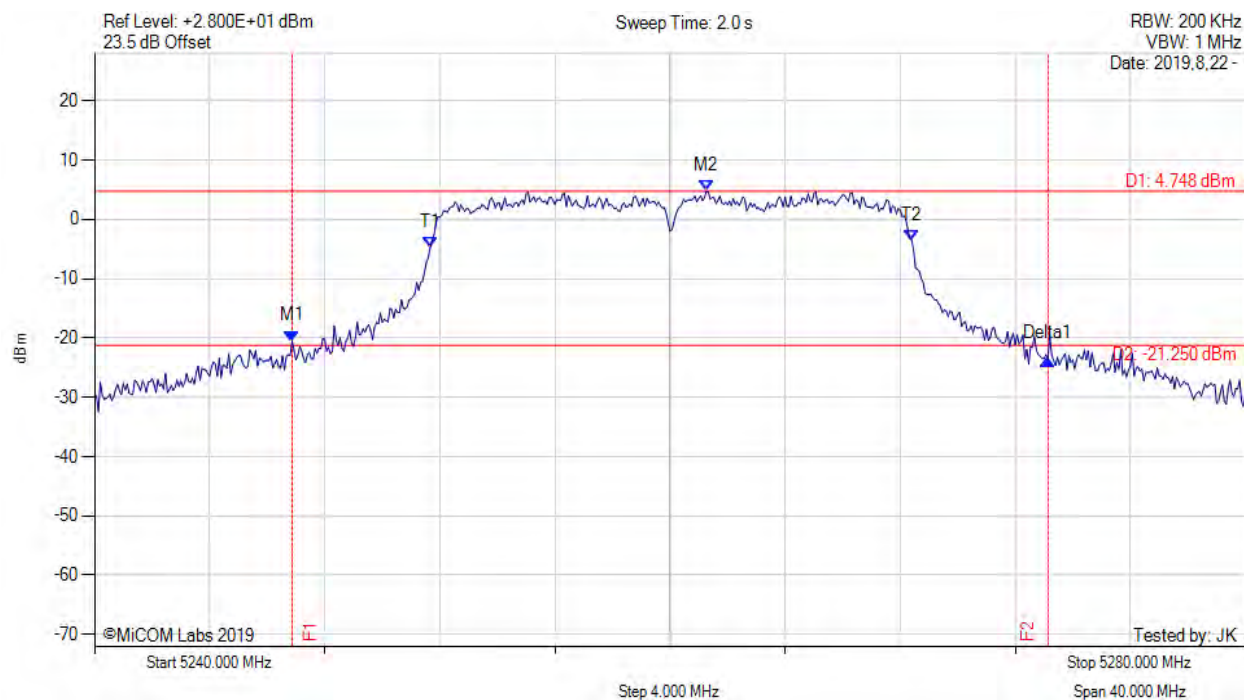


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5246.870 MHz : -20.525 dBm M2 : 5261.270 MHz : 4.748 dBm Delta1 : 26.270 MHz : -3.049 dB T1 : 5251.667 MHz : -4.732 dBm T2 : 5268.400 MHz : -3.517 dBm OBW : 16.749 MHz	Measured 26 dB Bandwidth: 26.270 MHz Measured 99% Bandwidth: 16.749 MHz

[back to matrix](#)



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5260.00 MHz, Chain b, Temp: 20, Voltage: Vdc

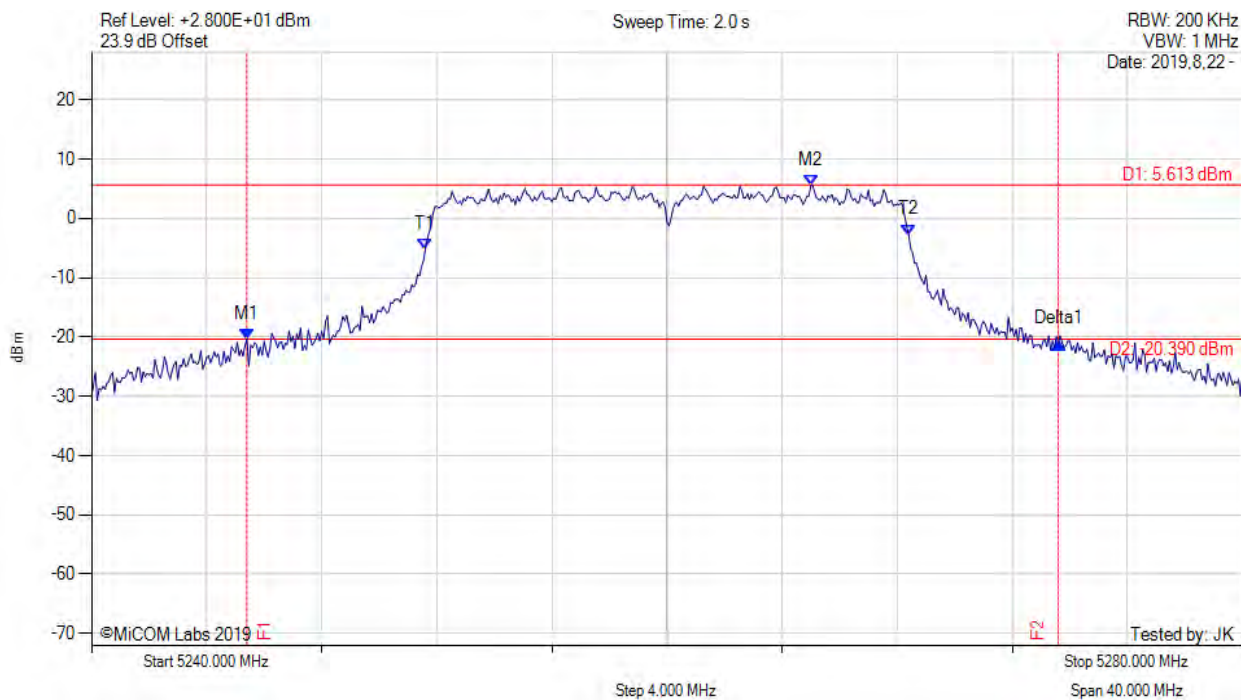


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5245.400 MHz : -20.342 dBm M2 : 5265.000 MHz : 5.613 dBm Delta1 : 28.200 MHz : -0.820 dB T1 : 5251.600 MHz : -5.239 dBm T2 : 5268.400 MHz : -2.756 dBm OBW : 16.875 MHz	Measured 26 dB Bandwidth: 28.200 MHz Measured 99% Bandwidth: 16.875 MHz

[back to matrix](#)



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5300.00 MHz, Chain a, Temp: 20, Voltage: Vdc

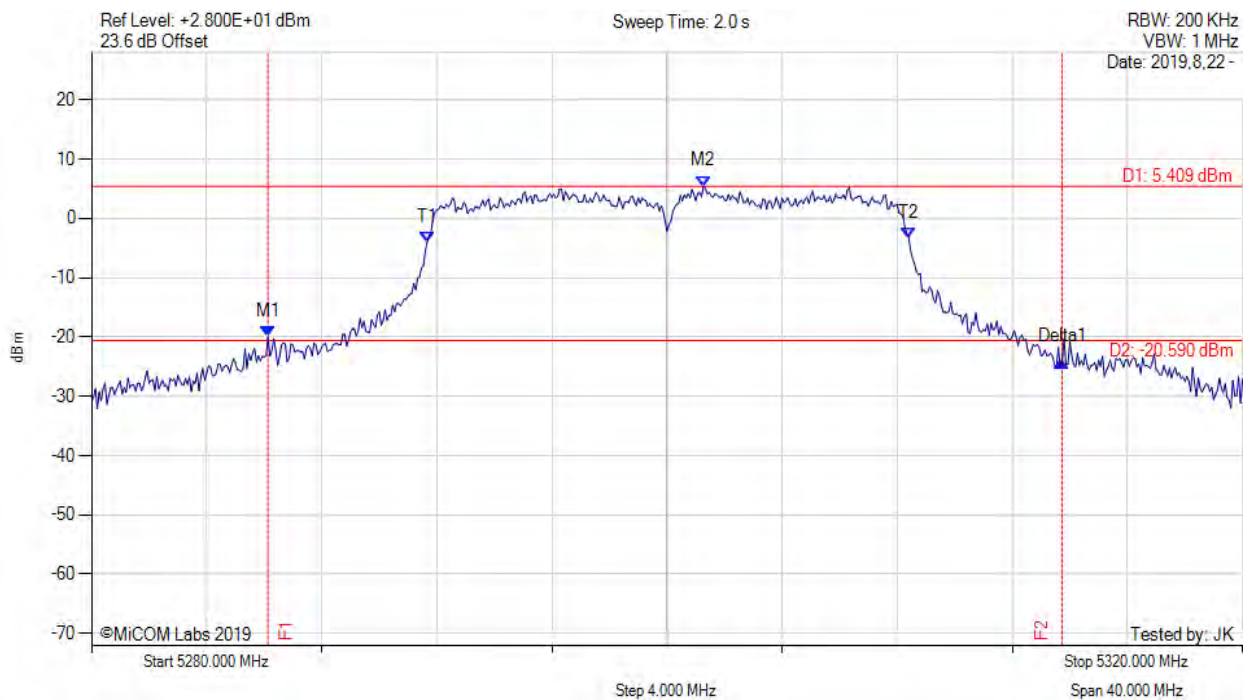


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5286.130 MHz : -19.989 dBm M2 : 5301.270 MHz : 5.409 dBm Delta1 : 27.600 MHz : -4.157 dB T1 : 5291.667 MHz : -3.968 dBm T2 : 5308.400 MHz : -3.244 dBm OBW : 16.789 MHz	Measured 26 dB Bandwidth: 27.600 MHz Measured 99% Bandwidth: 16.789 MHz

[back to matrix](#)



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5300.00 MHz, Chain b, Temp: 20, Voltage: Vdc

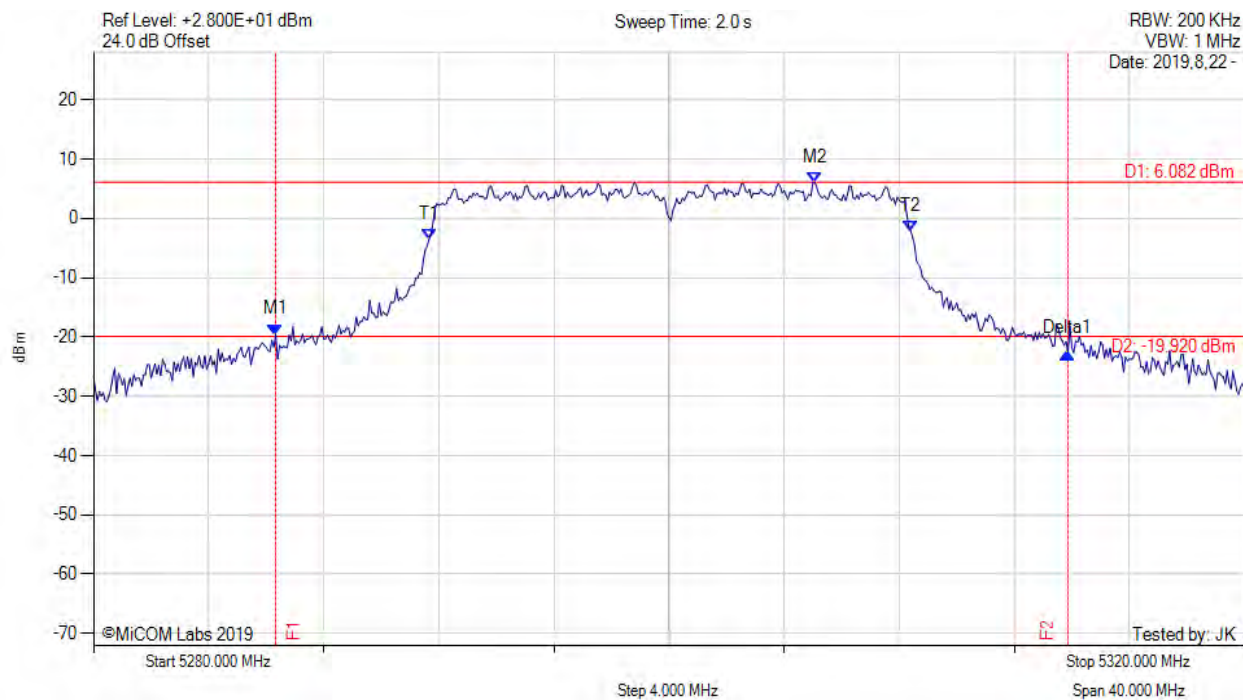

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5286.330 MHz : -19.582 dBm M2 : 5305.070 MHz : 6.082 dBm Delta1 : 27.530 MHz : -3.088 dB T1 : 5291.667 MHz : -3.490 dBm T2 : 5308.400 MHz : -2.192 dBm OBW : 16.829 MHz	Measured 26 dB Bandwidth: 27.530 MHz Measured 99% Bandwidth: 16.829 MHz


[back to matrix](#)





26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5320.00 MHz, Chain a, Temp: 20, Voltage: Vdc

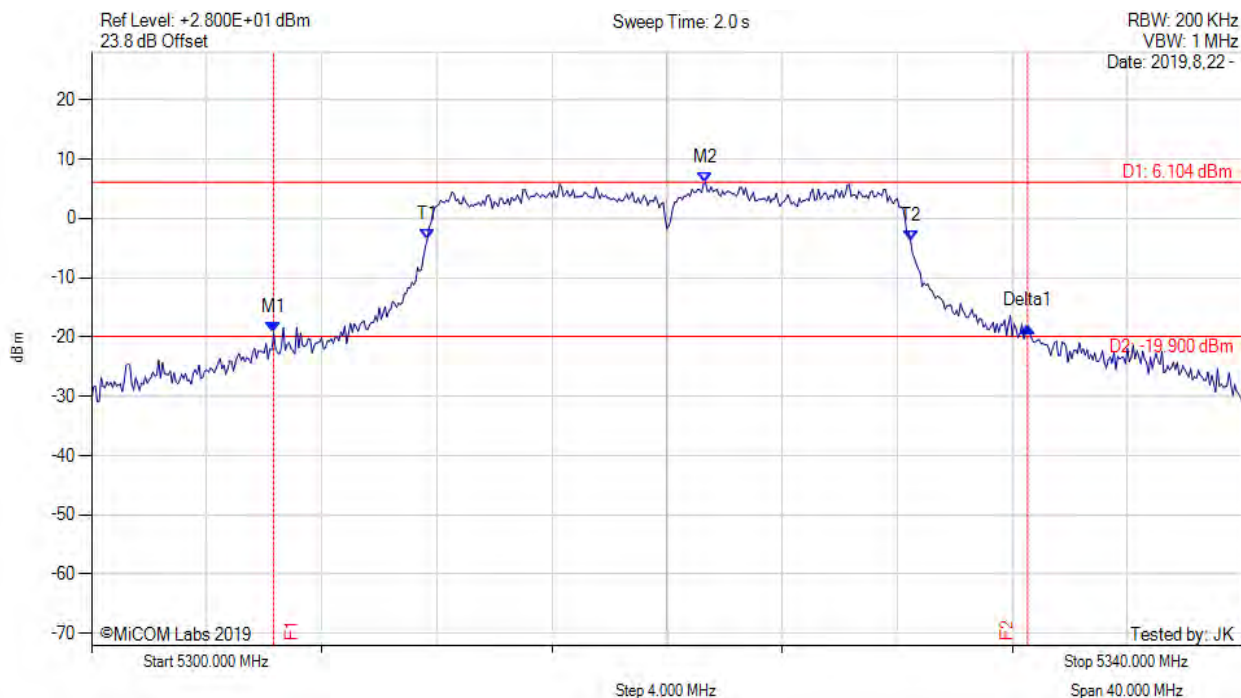


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5306.330 MHz : -19.313 dBm M2 : 5321.330 MHz : 6.104 dBm Delta1 : 26.200 MHz : 1.126 dB T1 : 5311.667 MHz : -3.622 dBm T2 : 5328.467 MHz : -3.814 dBm OBW : 16.839 MHz	Measured 26 dB Bandwidth: 26.200 MHz Measured 99% Bandwidth: 16.839 MHz

[back to matrix](#)



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5320.00 MHz, Chain b, Temp: 20, Voltage: Vdc

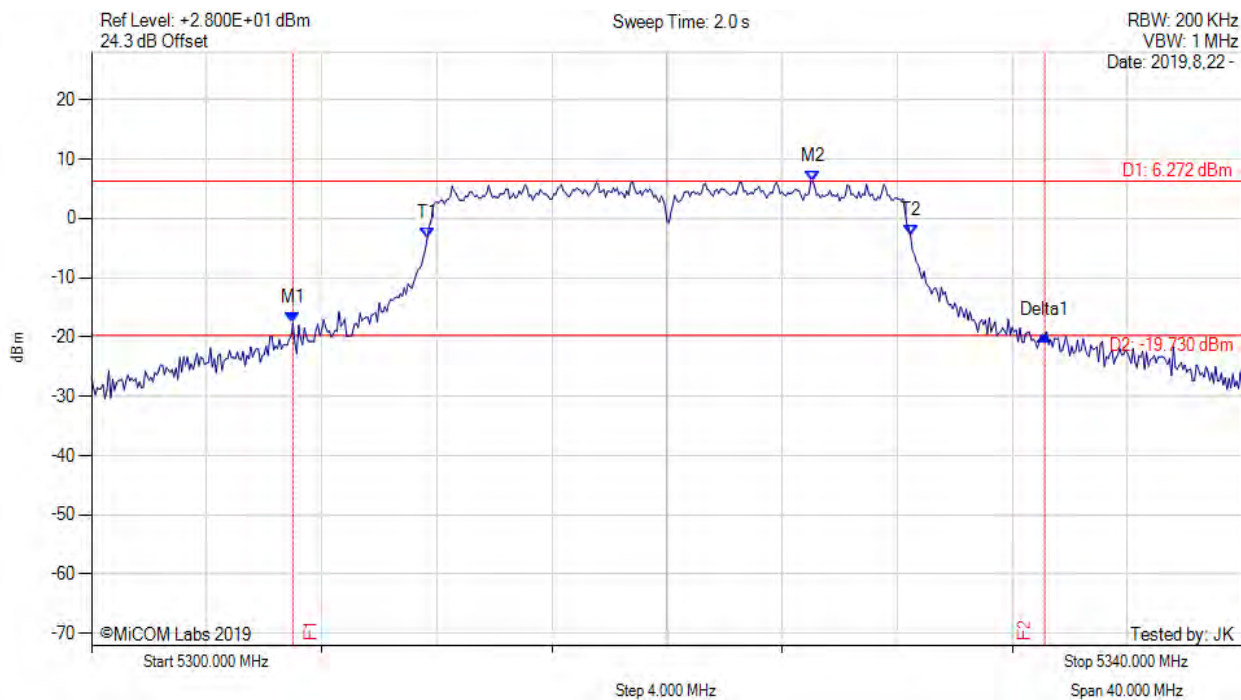

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5307.000 MHz : -17.687 dBm M2 : 5325.070 MHz : 6.272 dBm Delta1 : 26.130 MHz : -2.066 dB T1 : 5311.667 MHz : -3.359 dBm T2 : 5328.467 MHz : -2.976 dBm OBW : 16.796 MHz	Measured 26 dB Bandwidth: 26.130 MHz Measured 99% Bandwidth: 16.796 MHz


[back to matrix](#)





26 dB & 99% BANDWIDTH

Variant: 802.11ac-80, Channel: 5290.00 MHz, Chain a, Temp: 20, Voltage: Vdc

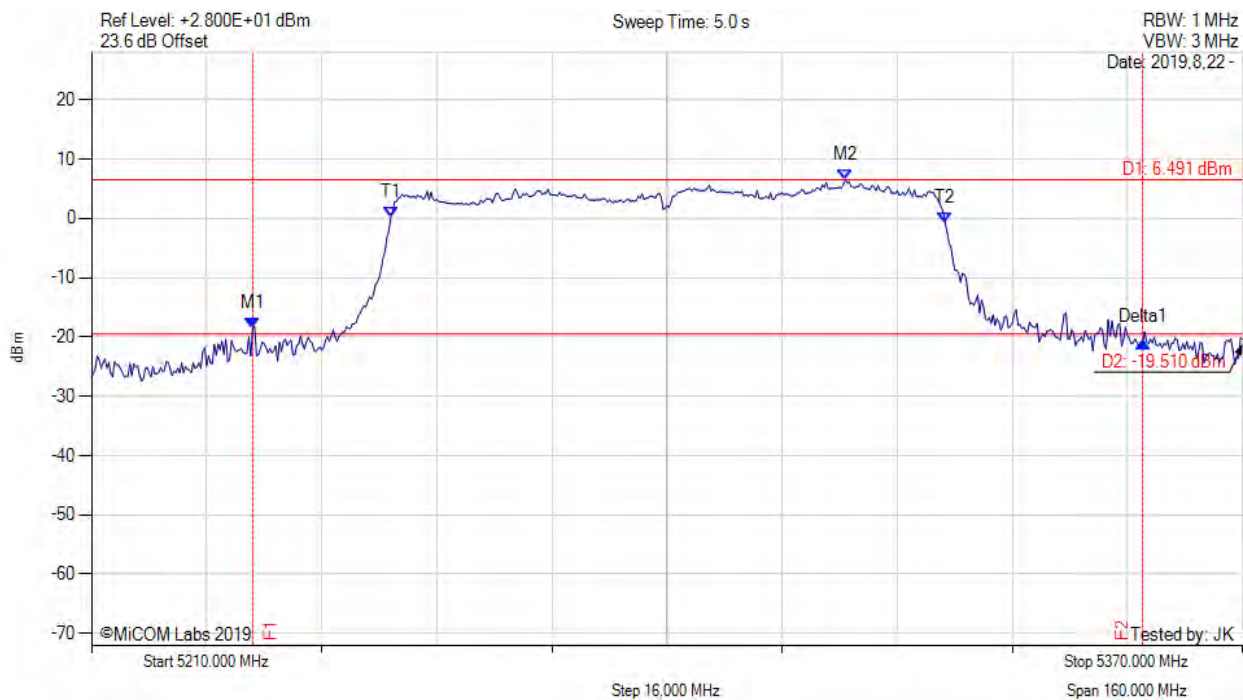


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5232.400 MHz : -18.537 dBm M2 : 5314.800 MHz : 6.491 dBm Delta1 : 123.730 MHz : -2.274 dB T1 : 5251.600 MHz : 0.197 dBm T2 : 5328.667 MHz : -0.803 dBm OBW : 77.283 MHz	Measured 26 dB Bandwidth: 123.730 MHz Measured 99% Bandwidth: 77.283 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH



Variant: 802.11ac-80, Channel: 5290.00 MHz, Chain b, Temp: 20, Voltage: Vdc

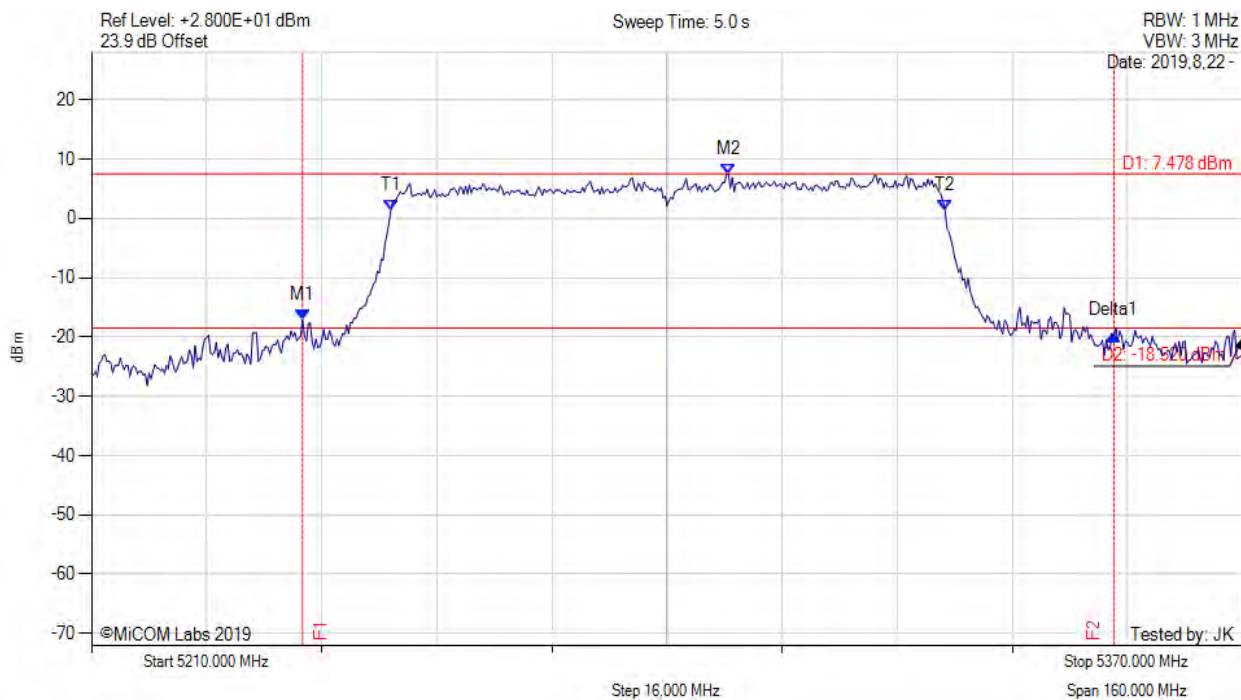


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5239.330 MHz : -17.052 dBm M2 : 5298.530 MHz : 7.478 dBm Delta1 : 112.800 MHz : -2.729 dB T1 : 5251.600 MHz : 1.296 dBm T2 : 5328.667 MHz : 1.273 dBm OBW : 77.007 MHz	Measured 26 dB Bandwidth: 112.800 MHz Measured 99% Bandwidth: 77.007 MHz

[back to matrix](#)



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5260.00 MHz, Chain a, Temp: 20, Voltage: Vdc

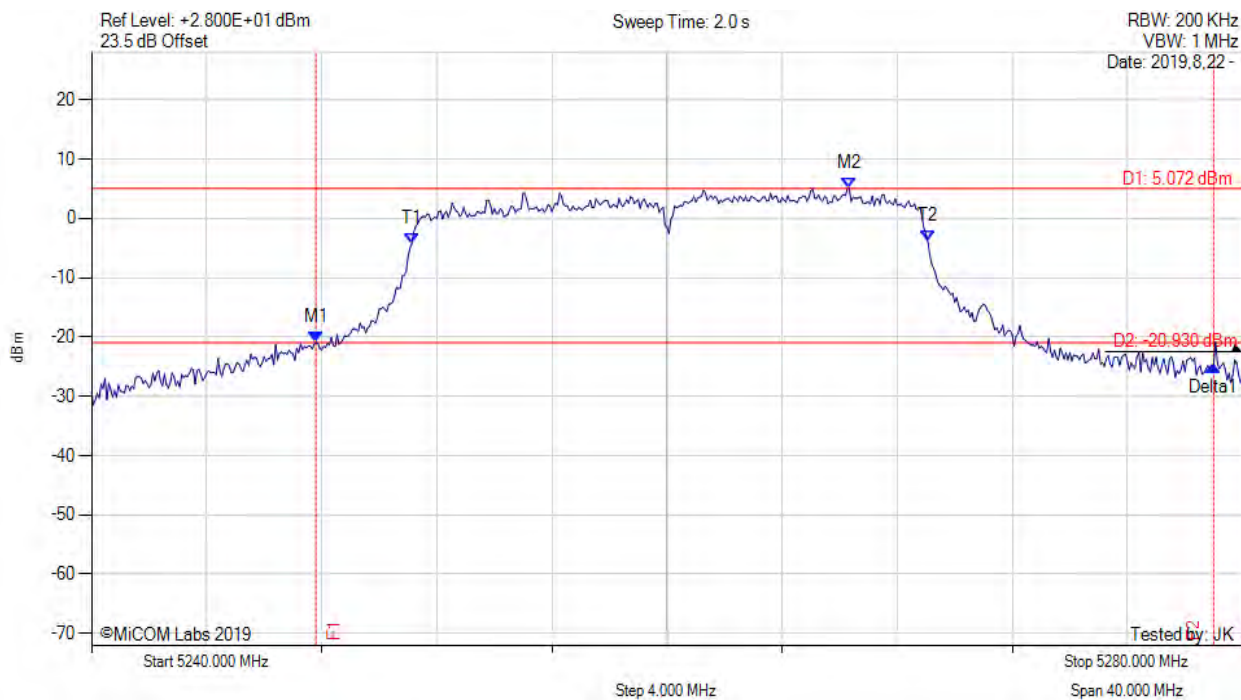


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5247.800 MHz : -20.926 dBm M2 : 5266.330 MHz : 5.072 dBm Delta1 : 31.200 MHz : -3.947 dB T1 : 5251.133 MHz : -4.198 dBm T2 : 5269.067 MHz : -3.906 dBm OBW : 17.962 MHz	Measured 26 dB Bandwidth: 31.200 MHz Measured 99% Bandwidth: 17.962 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH



Variant: 802.11n HT-20, Channel: 5260.00 MHz, Chain b, Temp: 20, Voltage: Vdc

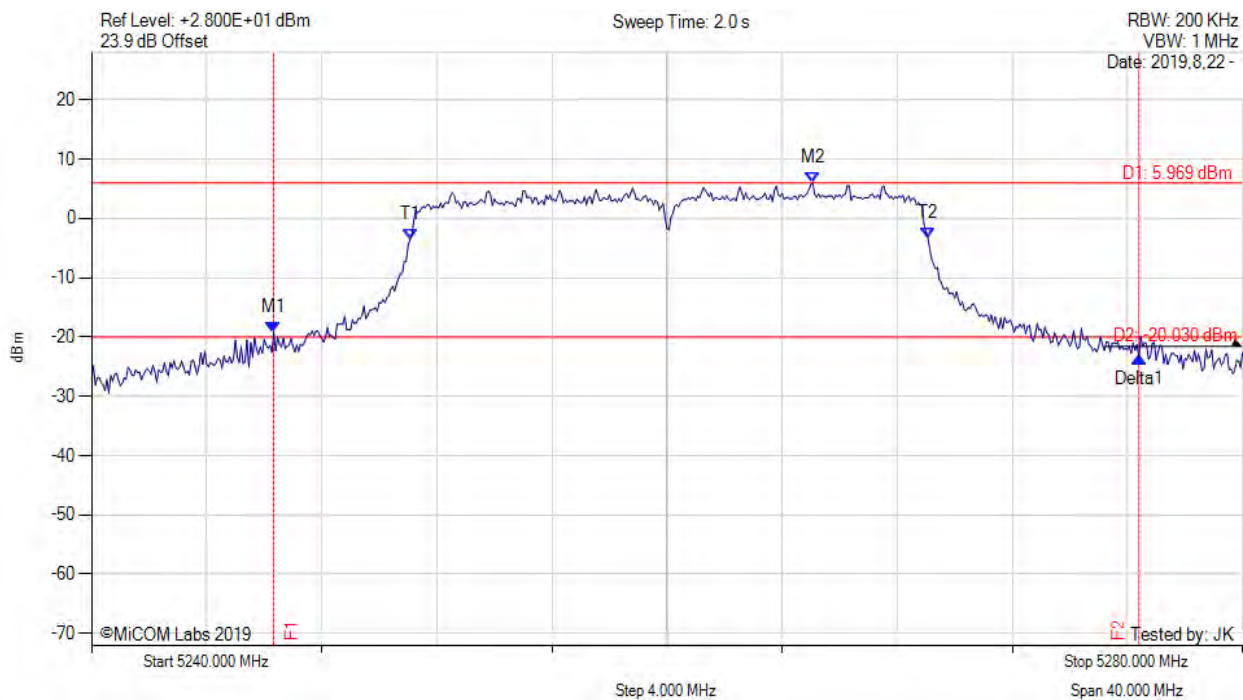


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5246.330 MHz : -19.264 dBm M2 : 5265.070 MHz : 5.969 dBm Delta1 : 30.070 MHz : -4.267 dB T1 : 5251.067 MHz : -3.482 dBm T2 : 5269.067 MHz : -3.275 dBm OBW : 18.067 MHz	Measured 26 dB Bandwidth: 30.070 MHz Measured 99% Bandwidth: 18.067 MHz

[back to matrix](#)

## 26 dB & 99% BANDWIDTH



Variant: 802.11n HT-20, Channel: 5300.00 MHz, Chain a, Temp: 20, Voltage: Vdc

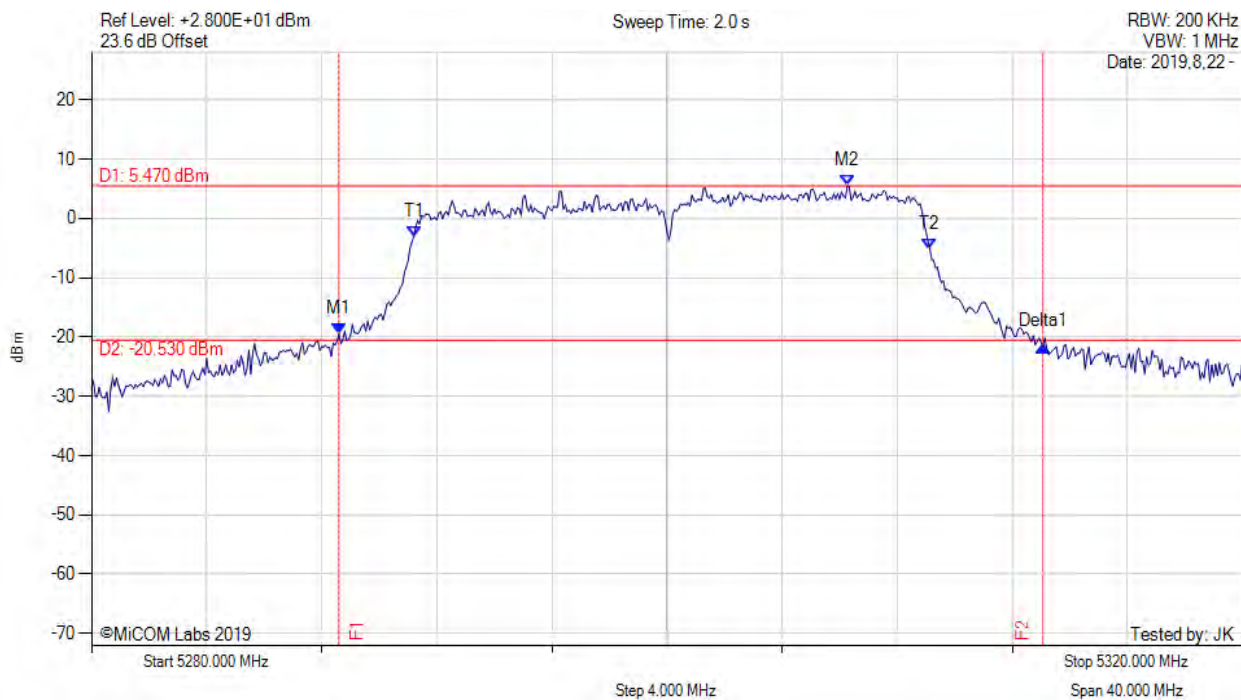

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5288.600 MHz : -19.494 dBm M2 : 5306.270 MHz : 5.470 dBm Delta1 : 24.470 MHz : -2.027 dB T1 : 5291.200 MHz : -3.034 dBm T2 : 5309.133 MHz : -5.131 dBm OBW : 18.049 MHz	Measured 26 dB Bandwidth: 24.470 MHz Measured 99% Bandwidth: 18.049 MHz


[back to matrix](#)





26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5300.00 MHz, Chain b, Temp: 20, Voltage: Vdc

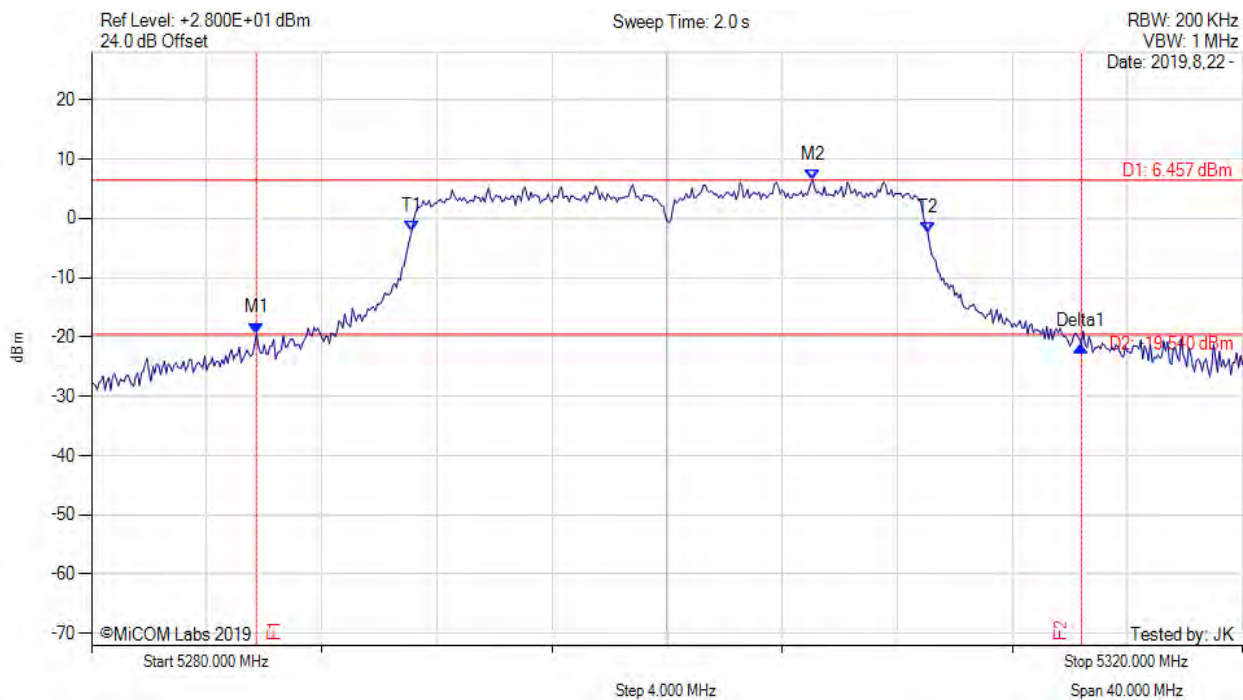

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5285.730 MHz : -19.348 dBm M2 : 5305.070 MHz : 6.457 dBm Delta1 : 28.670 MHz : -2.231 dB T1 : 5291.133 MHz : -2.142 dBm T2 : 5309.067 MHz : -2.433 dBm OBW : 18.028 MHz	Measured 26 dB Bandwidth: 28.670 MHz Measured 99% Bandwidth: 18.028 MHz


[back to matrix](#)



26 dB & 99% BANDWIDTH



Variant: 802.11n HT-20, Channel: 5320.00 MHz, Chain a, Temp: 20, Voltage: Vdc

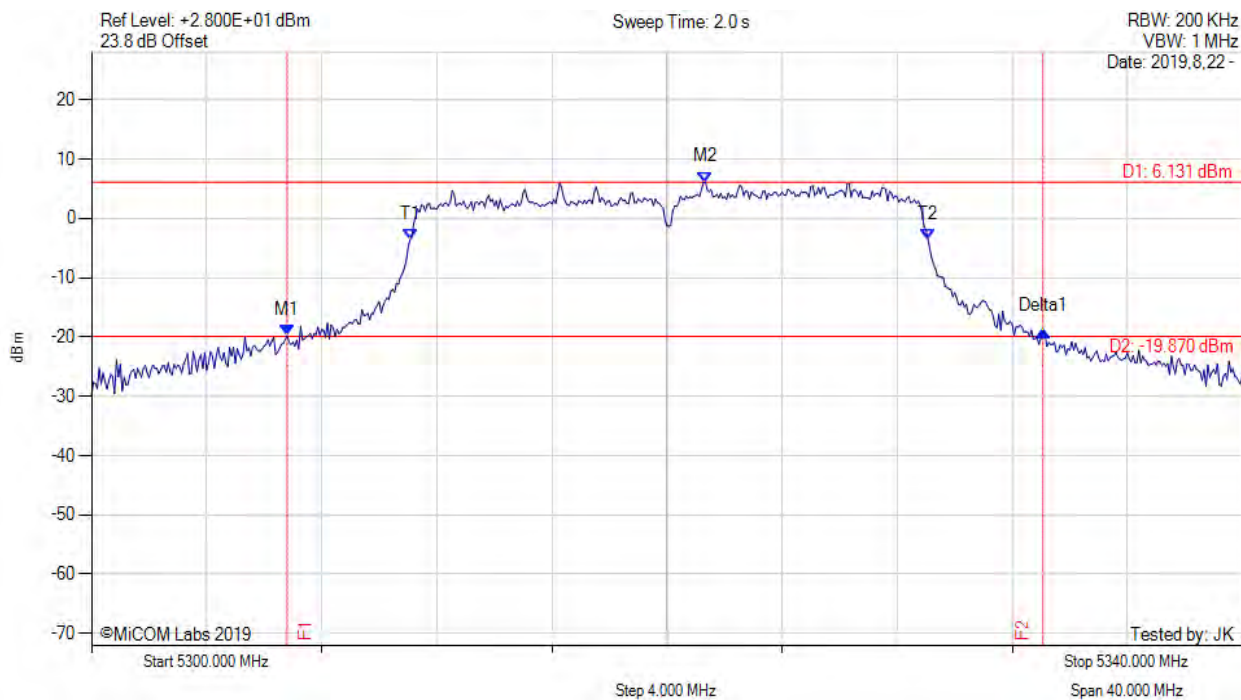


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5306.800 MHz : -19.771 dBm M2 : 5321.330 MHz : 6.131 dBm Delta1 : 26.270 MHz : 0.767 dB T1 : 5311.067 MHz : -3.621 dBm T2 : 5329.067 MHz : -3.488 dBm OBW : 18.004 MHz	Measured 26 dB Bandwidth: 26.270 MHz Measured 99% Bandwidth: 18.004 MHz

[back to matrix](#)



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5320.00 MHz, Chain b, Temp: 20, Voltage: Vdc

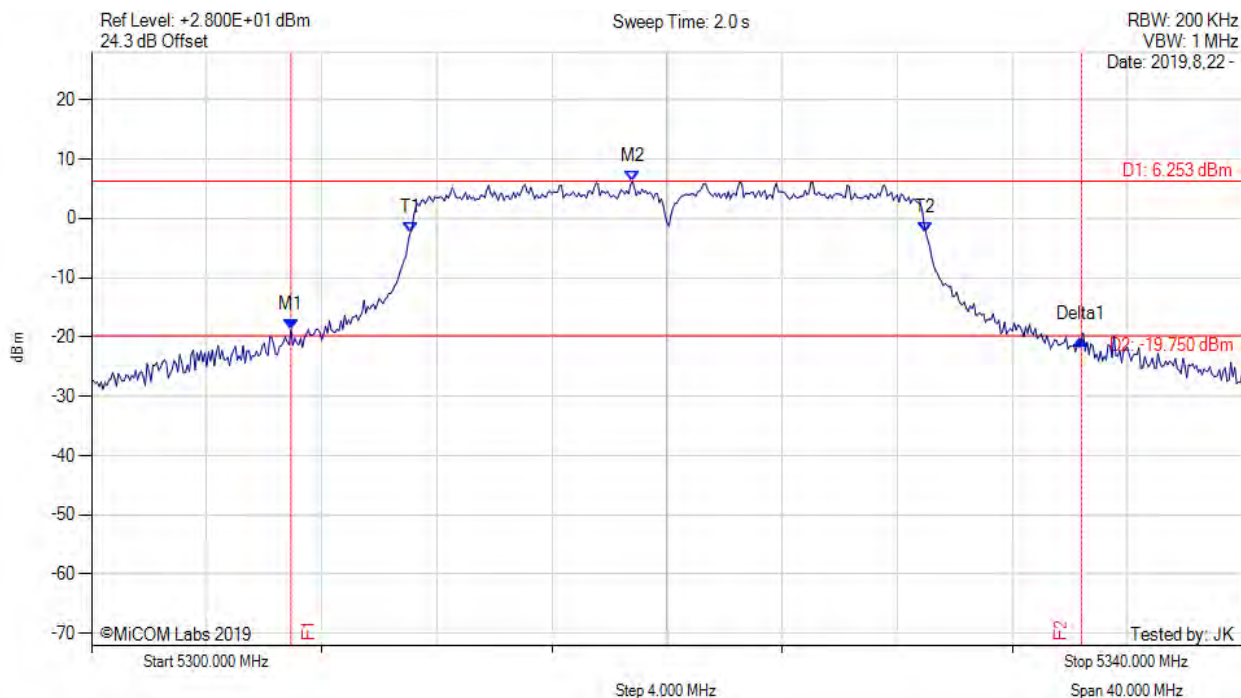


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5306.930 MHz : -18.766 dBm M2 : 5318.800 MHz : 6.253 dBm Delta1 : 27.470 MHz : -1.604 dB T1 : 5311.067 MHz : -2.513 dBm T2 : 5329.000 MHz : -2.436 dBm OBW : 17.934 MHz	Measured 26 dB Bandwidth: 27.470 MHz Measured 99% Bandwidth: 17.934 MHz

[back to matrix](#)



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5270.00 MHz, Chain a, Temp: 20, Voltage: Vdc

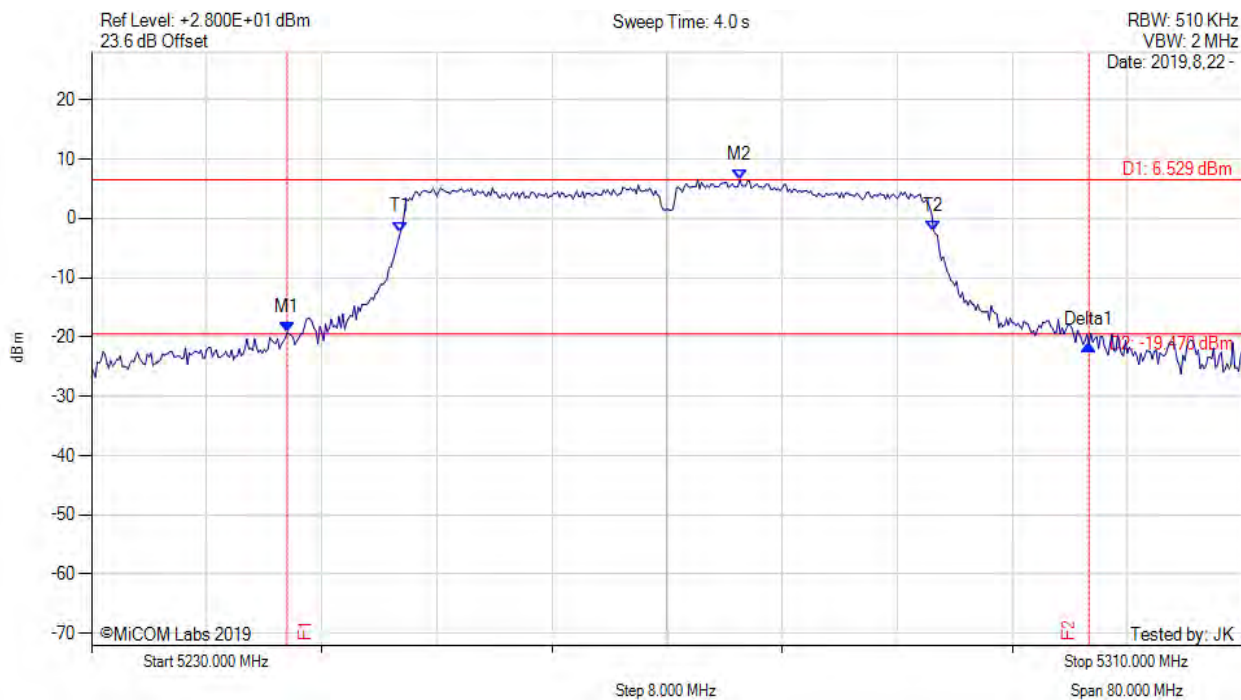


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5243.600 MHz : -19.245 dBm M2 : 5275.070 MHz : 6.529 dBm Delta1 : 55.730 MHz : -2.080 dB T1 : 5251.467 MHz : -2.282 dBm T2 : 5288.533 MHz : -2.117 dBm OBW : 37.173 MHz	Measured 26 dB Bandwidth: 55.730 MHz Measured 99% Bandwidth: 37.173 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH



Variant: 802.11n HT-40, Channel: 5270.00 MHz, Chain b, Temp: 20, Voltage: Vdc

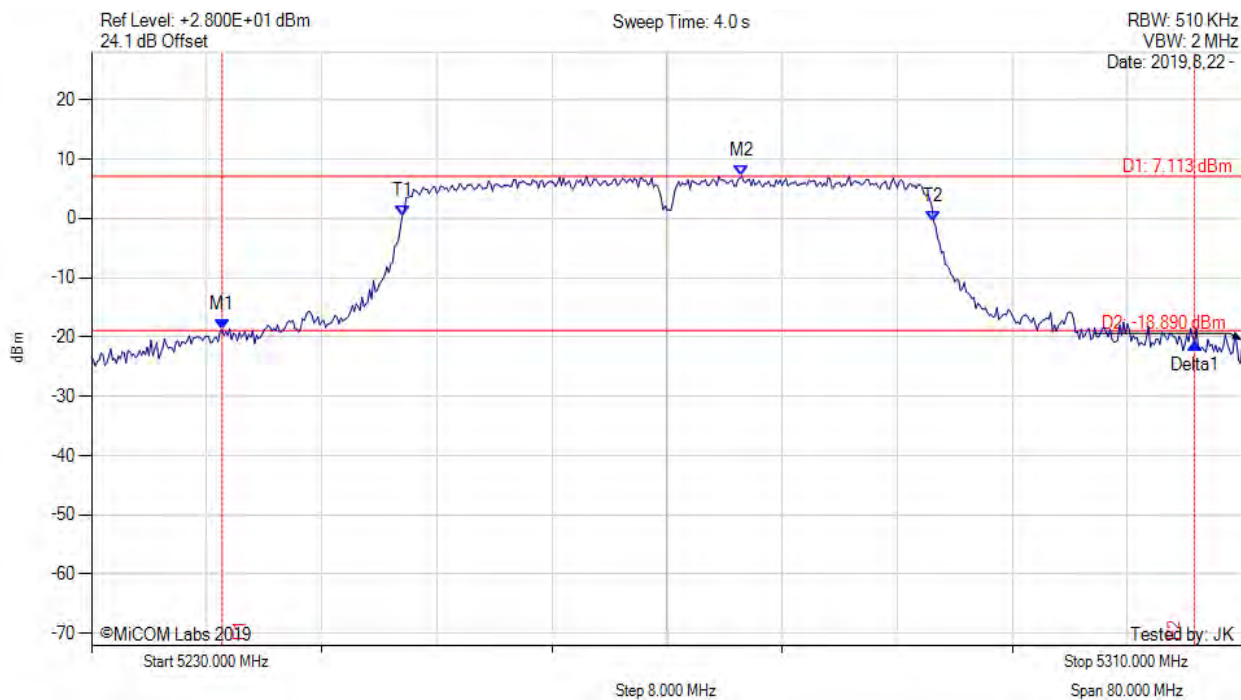


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5239.070 MHz : -18.766 dBm M2 : 5275.200 MHz : 7.113 dBm Delta1 : 67.600 MHz : -2.350 dB T1 : 5251.600 MHz : 0.487 dBm T2 : 5288.533 MHz : -0.577 dBm OBW : 37.040 MHz	Measured 26 dB Bandwidth: 67.600 MHz Measured 99% Bandwidth: 37.040 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH



Variant: 802.11n HT-40, Channel: 5310.00 MHz, Chain a, Temp: 20, Voltage: Vdc

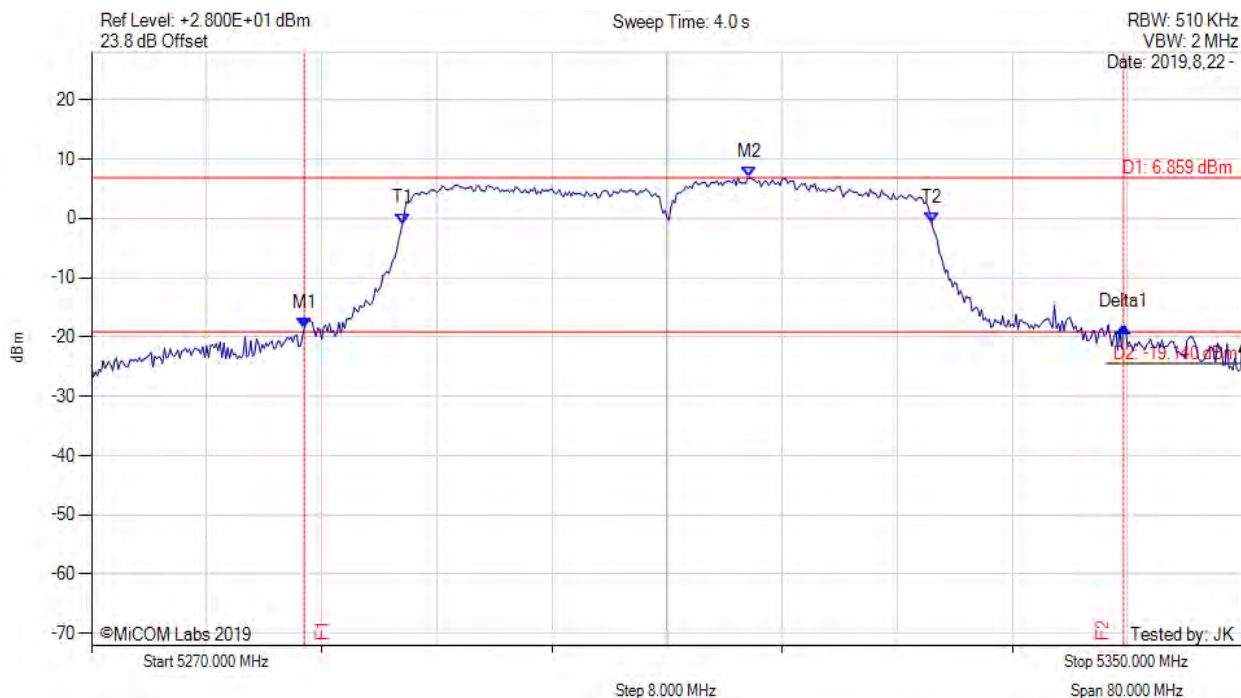

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5284.800 MHz : -18.498 dBm M2 : 5315.730 MHz : 6.859 dBm Delta1 : 56.930 MHz : 0.260 dB T1 : 5291.600 MHz : -0.902 dBm T2 : 5328.400 MHz : -0.744 dBm OBW : 36.998 MHz	Measured 26 dB Bandwidth: 56.930 MHz Measured 99% Bandwidth: 36.998 MHz


[back to matrix](#)



26 dB & 99% BANDWIDTH



Variant: 802.11n HT-40, Channel: 5310.00 MHz, Chain b, Temp: 20, Voltage: Vdc

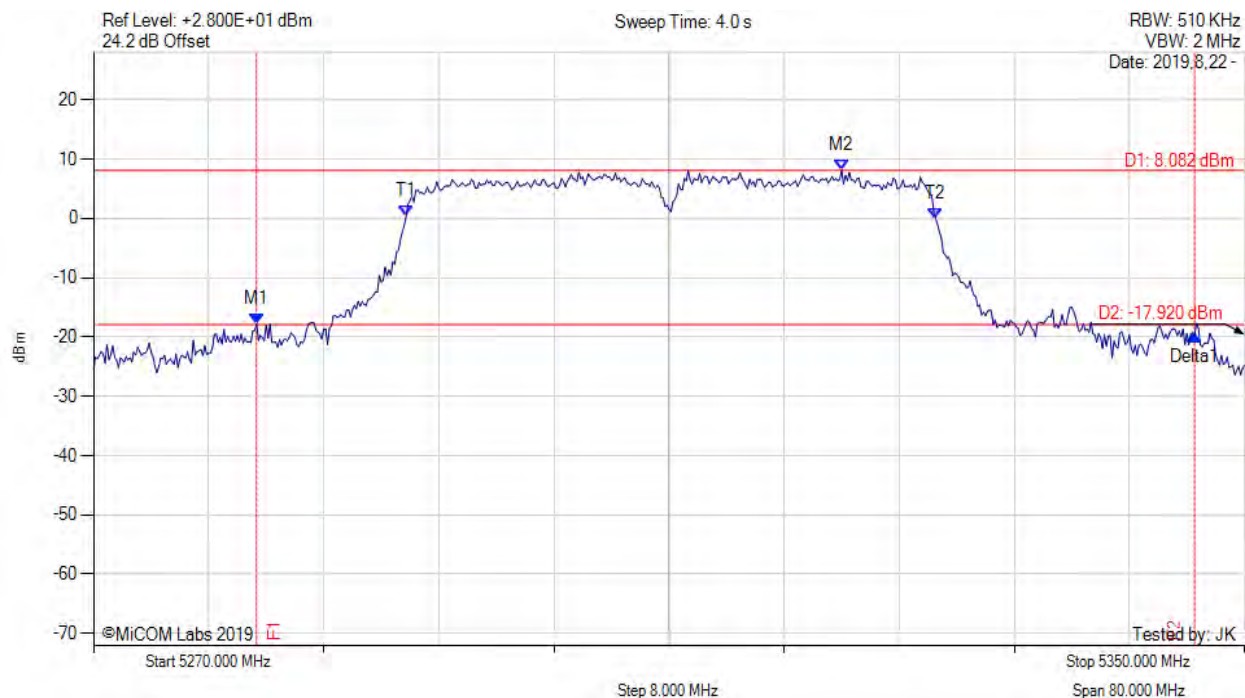

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5281.330 MHz : -17.846 dBm M2 : 5322.000 MHz : 8.082 dBm Delta1 : 65.200 MHz : -1.900 dB T1 : 5291.733 MHz : 0.439 dBm T2 : 5328.533 MHz : -0.016 dBm OBW : 36.903 MHz	Measured 26 dB Bandwidth: 65.200 MHz Measured 99% Bandwidth: 36.903 MHz


[back to matrix](#)





26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5500.00 MHz, Chain a, Temp: 20, Voltage: Vdc

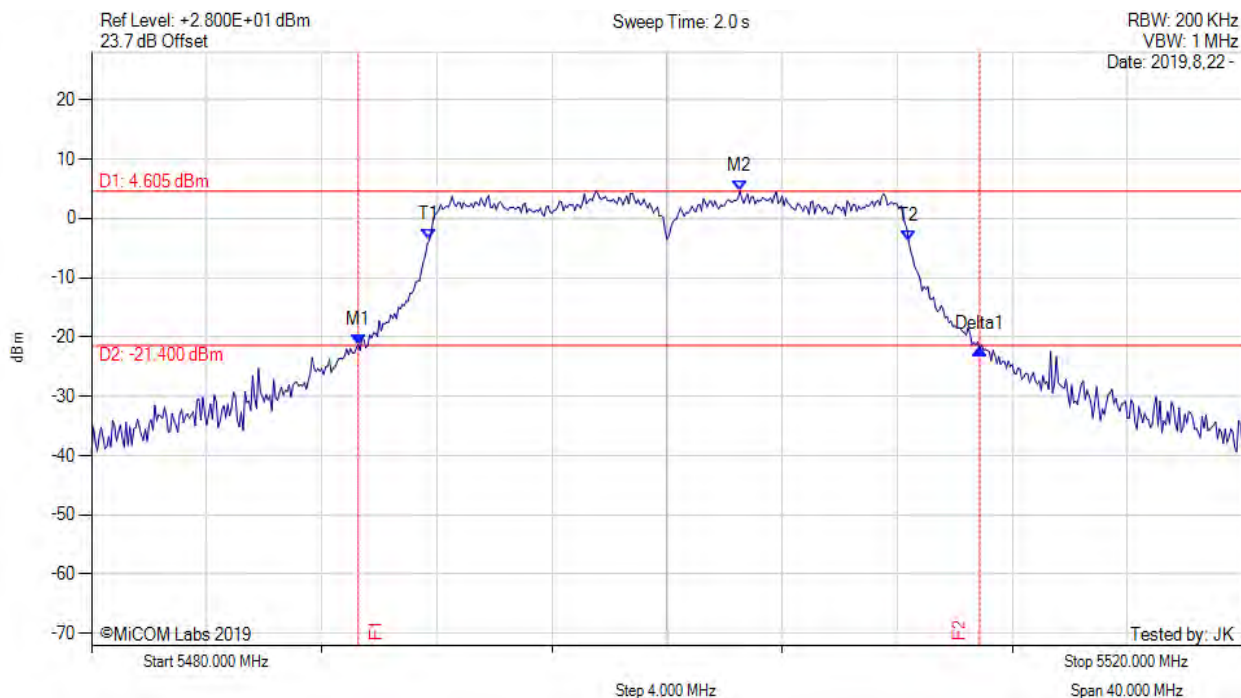


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5489.270 MHz : -21.243 dBm M2 : 5502.530 MHz : 4.605 dBm Delta1 : 21.600 MHz : -0.841 dB T1 : 5491.733 MHz : -3.674 dBm T2 : 5508.400 MHz : -3.856 dBm OBW : 16.672 MHz	Measured 26 dB Bandwidth: 21.600 MHz Measured 99% Bandwidth: 16.672 MHz

[back to matrix](#)



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5500.00 MHz, Chain b, Temp: 20, Voltage: Vdc

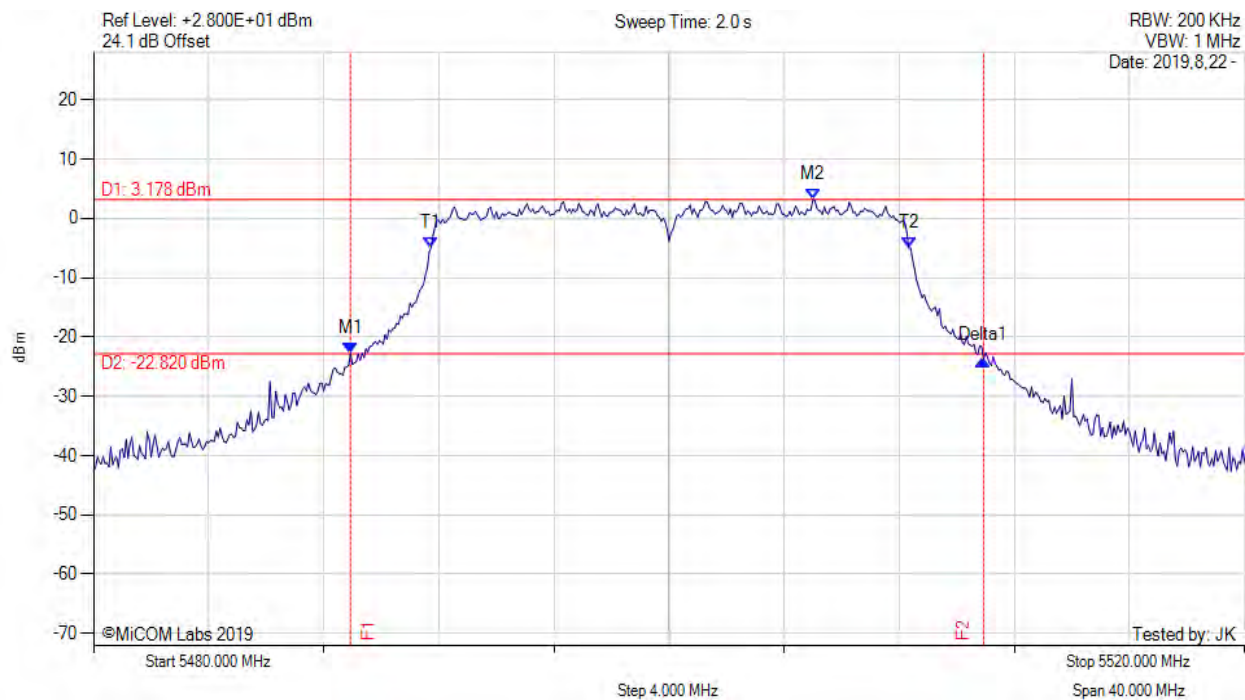


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5488.930 MHz : -22.810 dBm M2 : 5505.000 MHz : 3.178 dBm Delta1 : 22.000 MHz : -1.010 dB T1 : 5491.733 MHz : -4.920 dBm T2 : 5508.333 MHz : -5.020 dBm OBW : 16.578 MHz	Measured 26 dB Bandwidth: 22.000 MHz Measured 99% Bandwidth: 16.578 MHz

[back to matrix](#)



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5580.00 MHz, Chain a, Temp: 20, Voltage: Vdc

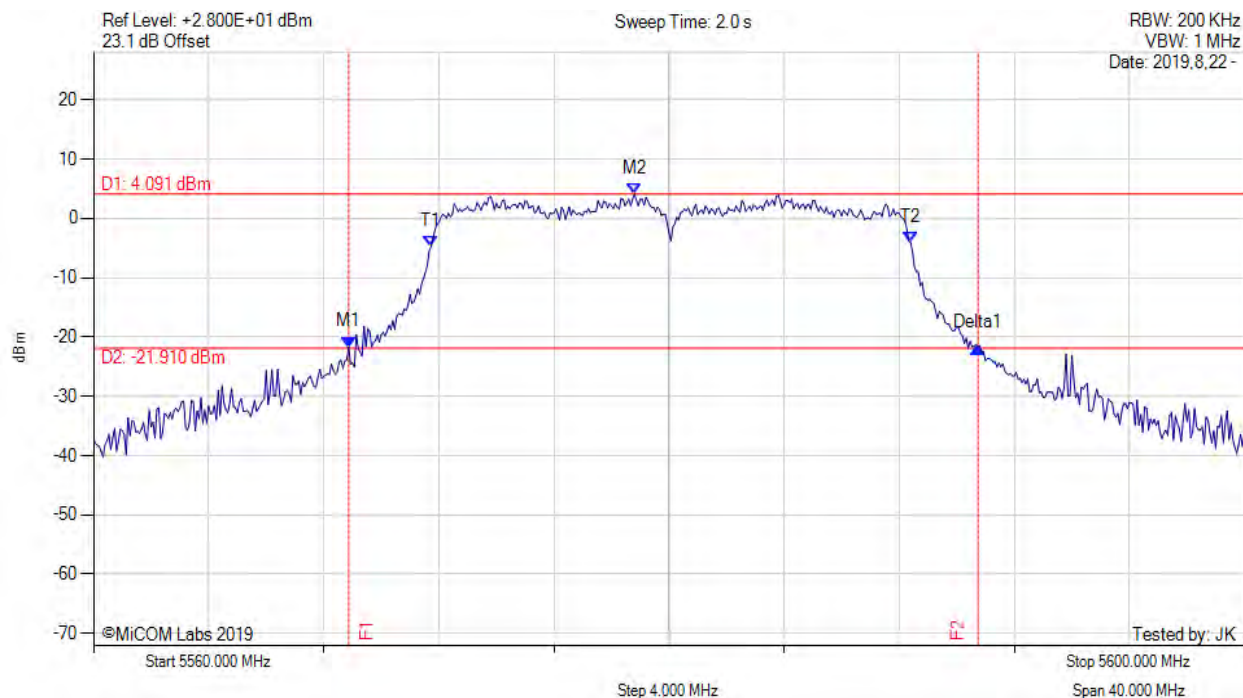


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5568.870 MHz : -21.682 dBm M2 : 5578.800 MHz : 4.091 dBm Delta1 : 21.870 MHz : -0.138 dB T1 : 5571.733 MHz : -4.726 dBm T2 : 5588.400 MHz : -4.126 dBm OBW : 16.620 MHz	Measured 26 dB Bandwidth: 21.870 MHz Measured 99% Bandwidth: 16.620 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH



Variant: 802.11a, Channel: 5580.00 MHz, Chain b, Temp: 20, Voltage: Vdc

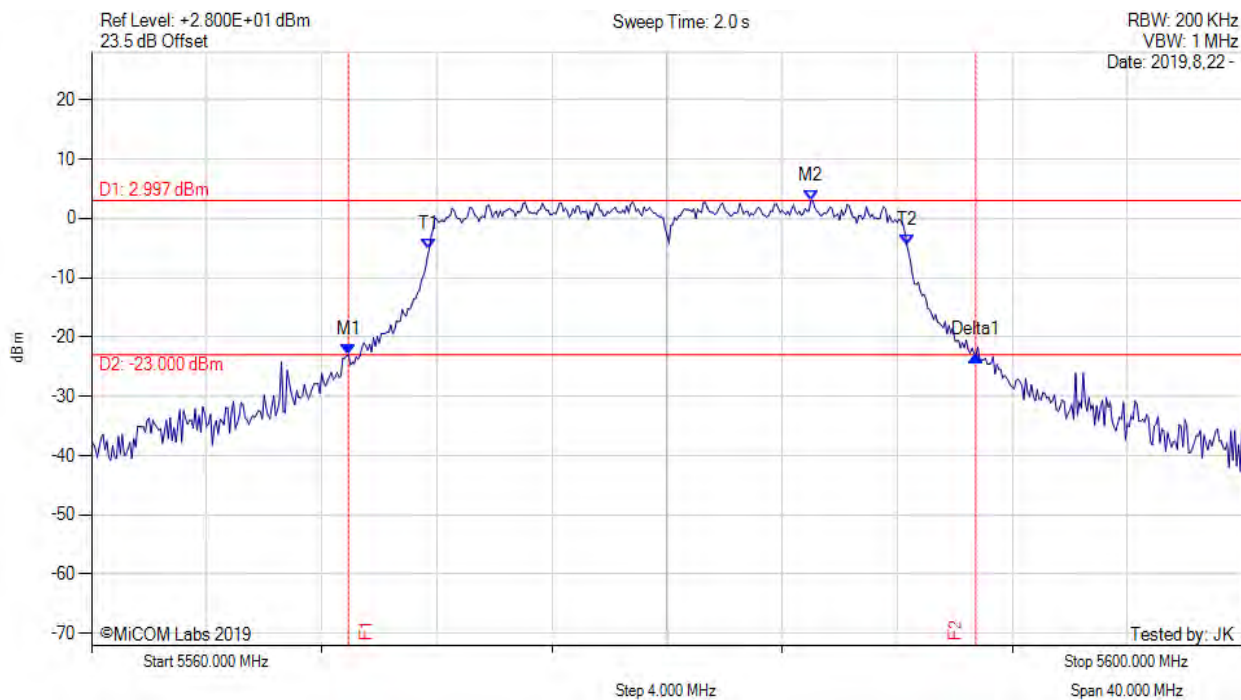

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5568.930 MHz : -22.962 dBm M2 : 5585.000 MHz : 2.997 dBm Delta1 : 21.800 MHz : -0.122 dB T1 : 5571.733 MHz : -5.259 dBm T2 : 5588.333 MHz : -4.446 dBm OBW : 16.553 MHz	Measured 26 dB Bandwidth: 21.800 MHz Measured 99% Bandwidth: 16.553 MHz


[back to matrix](#)



## 26 dB & 99% BANDWIDTH



Variant: 802.11a, Channel: 5720.00 MHz, Chain a, Temp: 20, Voltage: Vdc

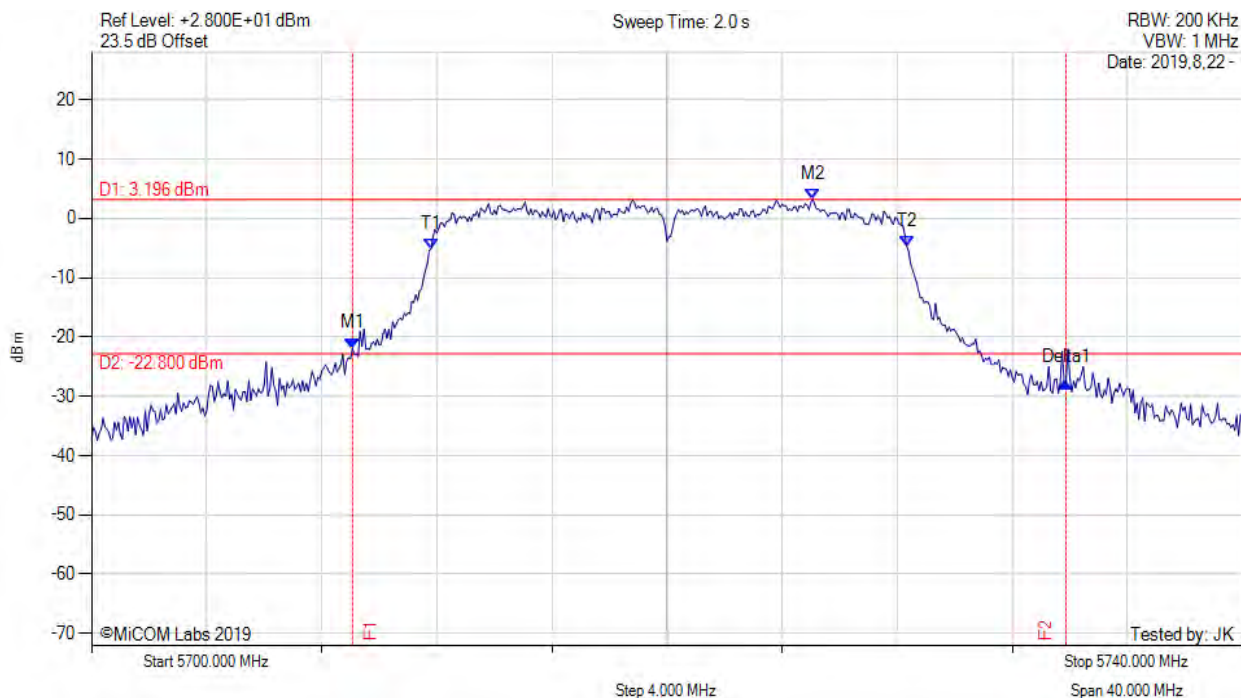


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5709.070 MHz : -21.918 dBm M2 : 5725.070 MHz : 3.196 dBm Delta1 : 24.800 MHz : -5.782 dB T1 : 5711.800 MHz : -5.151 dBm T2 : 5728.333 MHz : -4.711 dBm OBW : 16.591 MHz	Measured 26 dB Bandwidth: 24.800 MHz Measured 99% Bandwidth: 16.591 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH



Variant: 802.11a, Channel: 5720.00 MHz, Chain b, Temp: 20, Voltage: Vdc

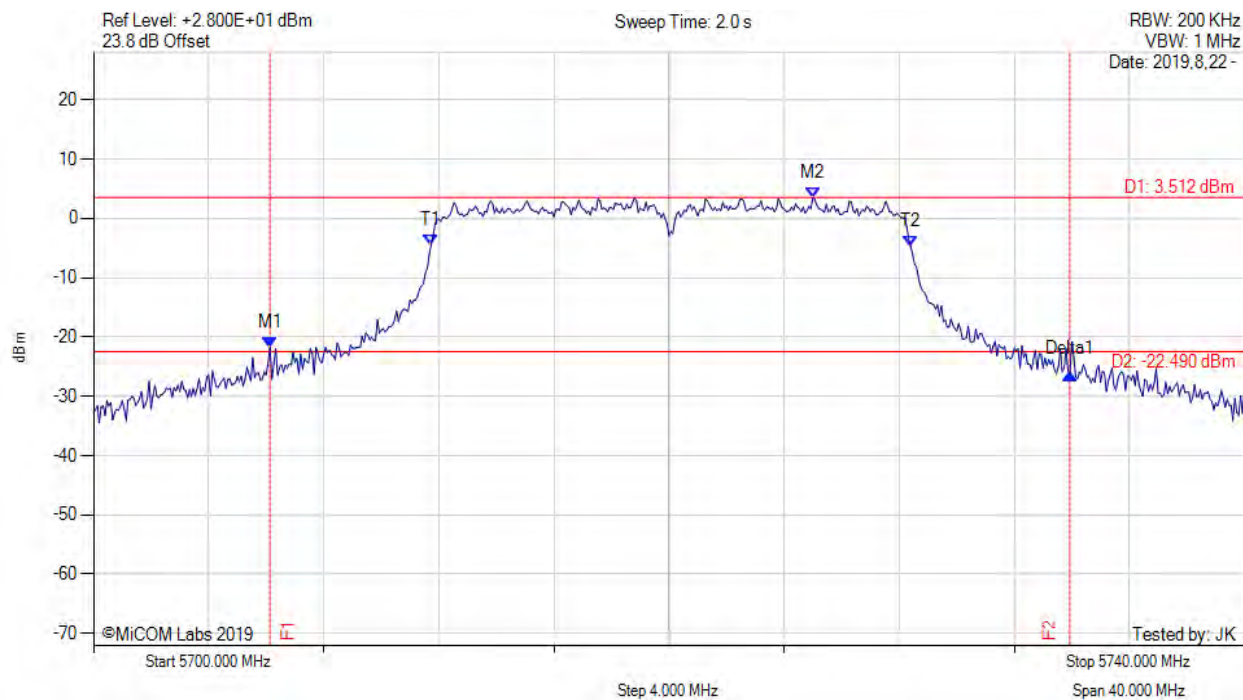

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5706.130 MHz : -21.769 dBm M2 : 5725.000 MHz : 3.512 dBm Delta1 : 27.800 MHz : -4.381 dB T1 : 5711.733 MHz : -4.522 dBm T2 : 5728.400 MHz : -4.739 dBm OBW : 16.702 MHz	Measured 26 dB Bandwidth: 27.800 MHz Measured 99% Bandwidth: 16.702 MHz


[back to matrix](#)



26 dB & 99% BANDWIDTH



Variant: 802.11ac-80, Channel: 5530.00 MHz, Chain a, Temp: 20, Voltage: Vdc

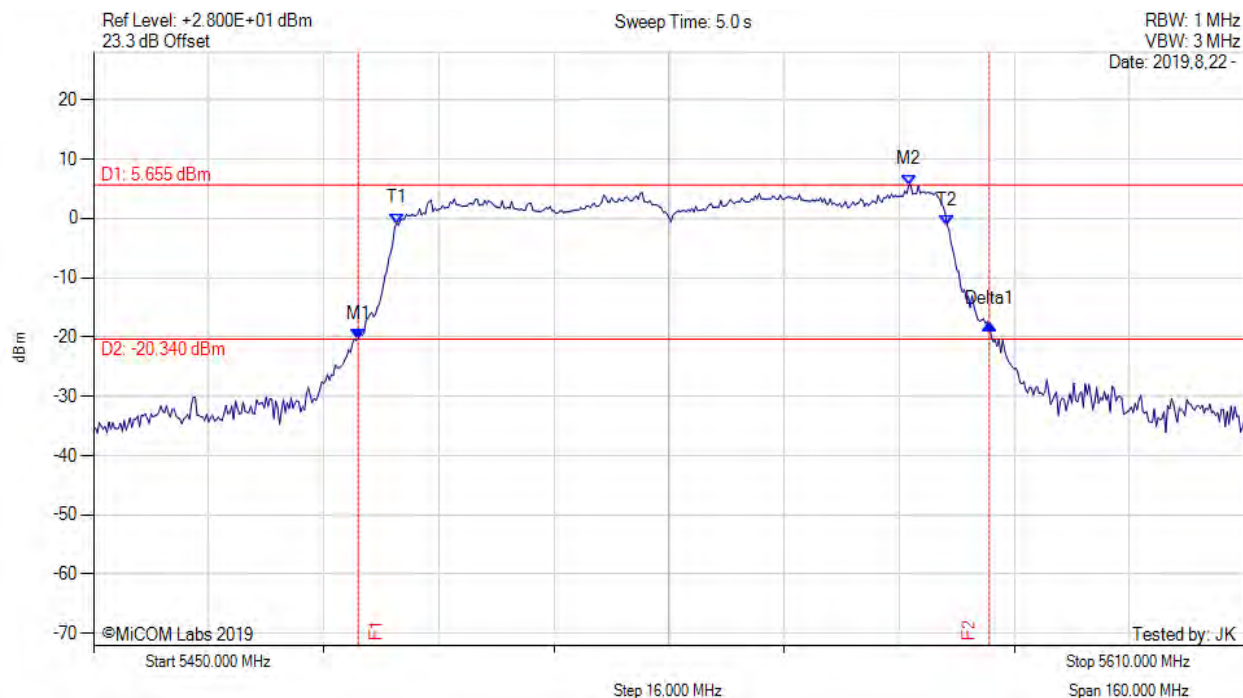


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5486.800 MHz : -20.331 dBm M2 : 5563.330 MHz : 5.655 dBm Delta1 : 87.730 MHz : 2.565 dB T1 : 5492.133 MHz : -0.883 dBm T2 : 5568.667 MHz : -1.184 dBm OBW : 76.546 MHz	Measured 26 dB Bandwidth: 87.730 MHz Measured 99% Bandwidth: 76.546 MHz

[back to matrix](#)

## 26 dB & 99% BANDWIDTH



Variant: 802.11ac-80, Channel: 5530.00 MHz, Chain b, Temp: 20, Voltage: Vdc

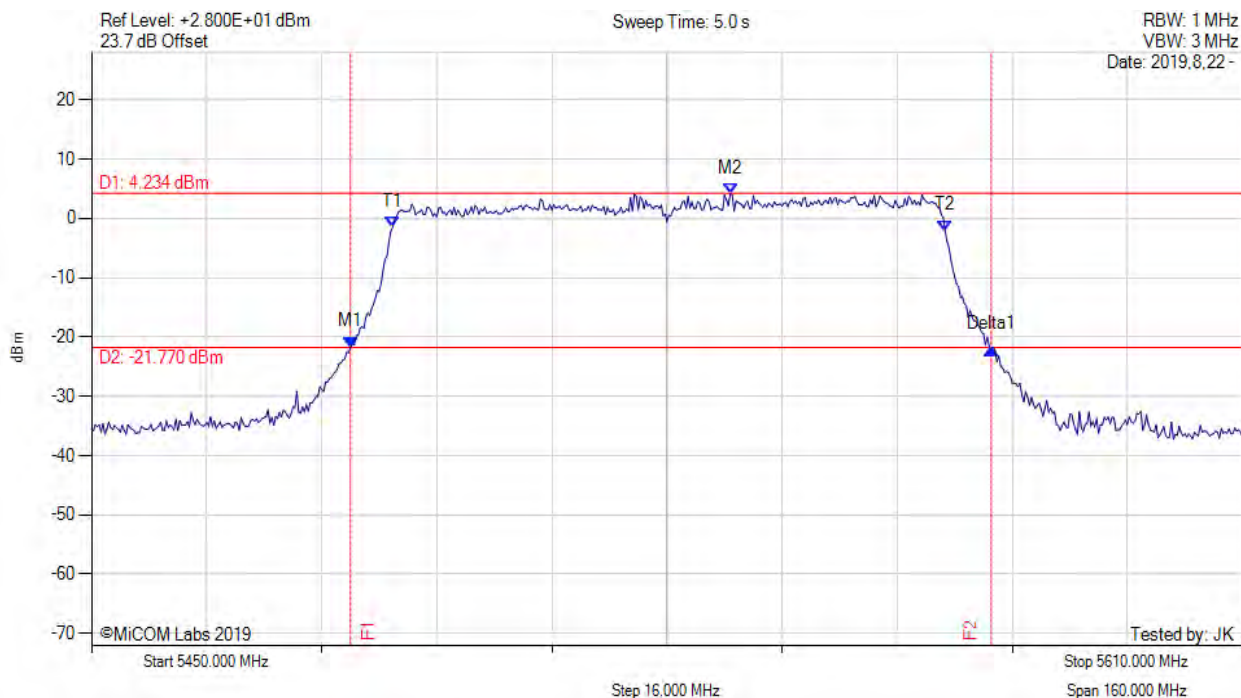


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5486.000 MHz : -21.684 dBm M2 : 5538.800 MHz : 4.234 dBm Delta1 : 89.070 MHz : -0.286 dB T1 : 5491.867 MHz : -1.485 dBm T2 : 5568.667 MHz : -2.069 dBm OBW : 76.610 MHz	Measured 26 dB Bandwidth: 89.070 MHz Measured 99% Bandwidth: 76.610 MHz

[back to matrix](#)

# 26 dB & 99% BANDWIDTH



Variant: 802.11ac-80, Channel: 5610.00 MHz, Chain a, Temp: 20, Voltage: Vdc

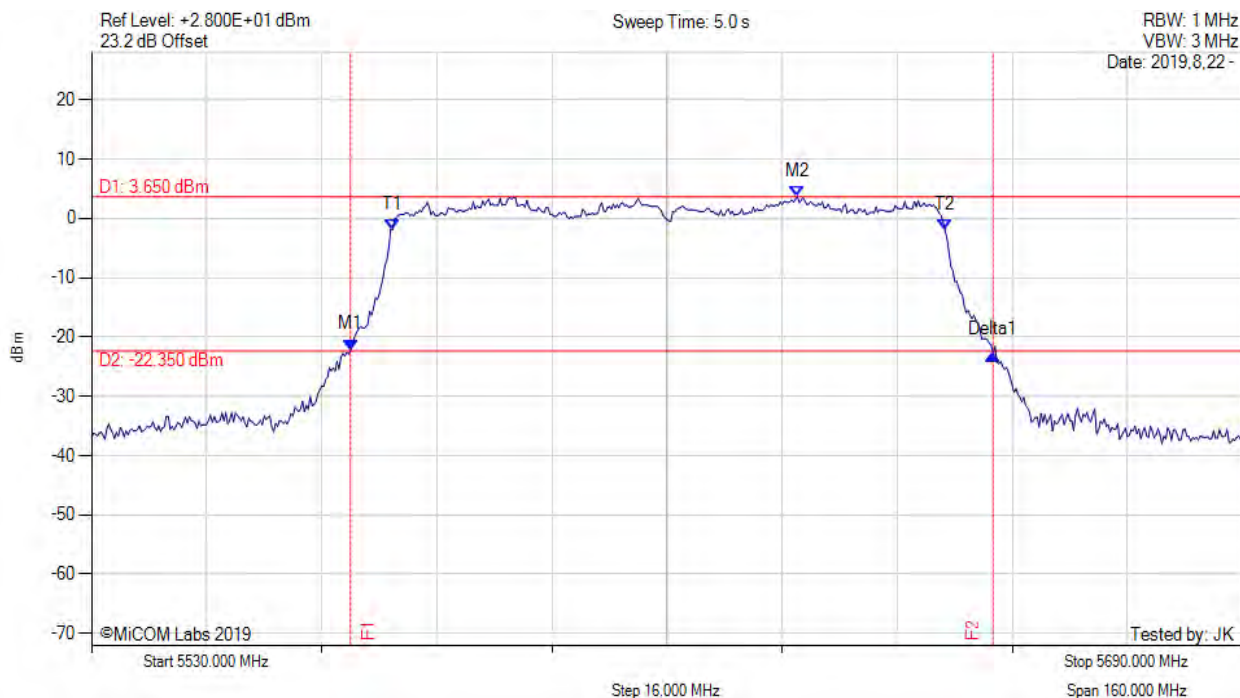


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5566.000 MHz : -22.148 dBm M2 : 5628.130 MHz : 3.650 dBm Delta1 : 89.330 MHz : -0.768 dB T1 : 5571.867 MHz : -1.872 dBm T2 : 5648.667 MHz : -2.014 dBm OBW : 76.684 MHz	Measured 26 dB Bandwidth: 89.330 MHz Measured 99% Bandwidth: 76.684 MHz

[back to matrix](#)



26 dB & 99% BANDWIDTH

Variant: 802.11ac-80, Channel: 5610.00 MHz, Chain b, Temp: 20, Voltage: Vdc

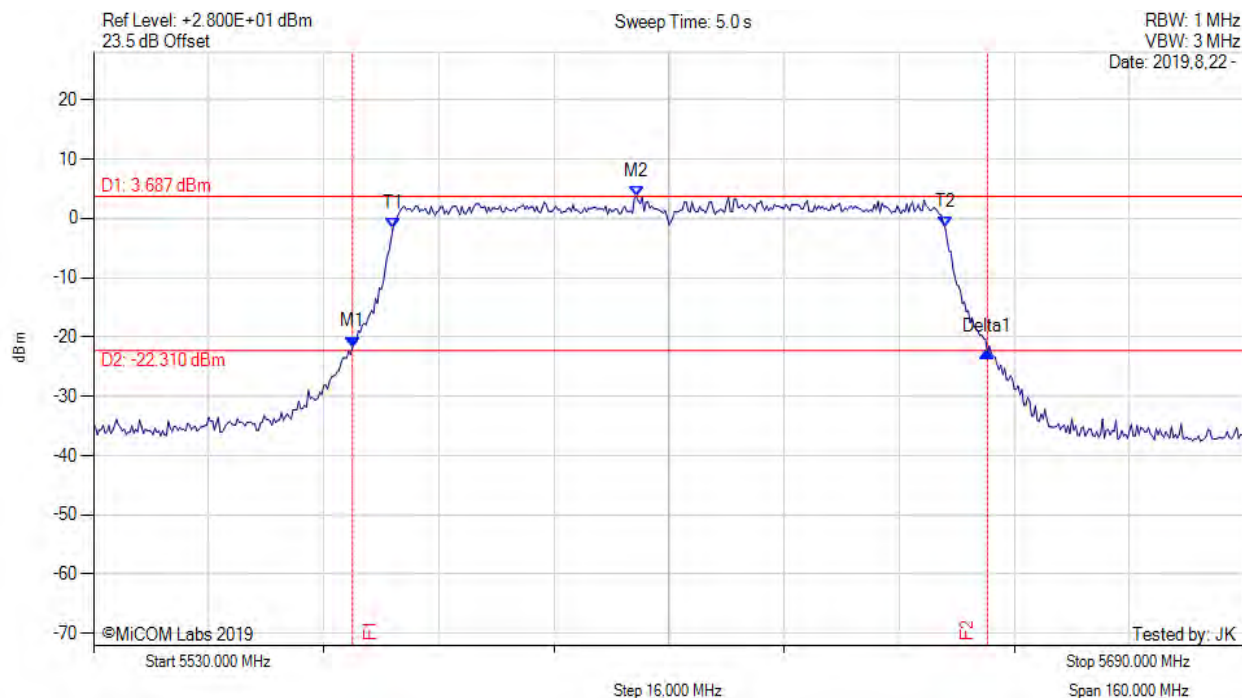


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5566.000 MHz : -21.678 dBm M2 : 5605.470 MHz : 3.687 dBm Delta1 : 88.270 MHz : -0.911 dB T1 : 5571.600 MHz : -1.791 dBm T2 : 5648.400 MHz : -1.535 dBm OBW : 76.602 MHz	Measured 26 dB Bandwidth: 88.270 MHz Measured 99% Bandwidth: 76.602 MHz

[back to matrix](#)

# 26 dB & 99% BANDWIDTH



Variant: 802.11ac-80, Channel: 5690.00 MHz, Chain a, Temp: 20, Voltage: Vdc

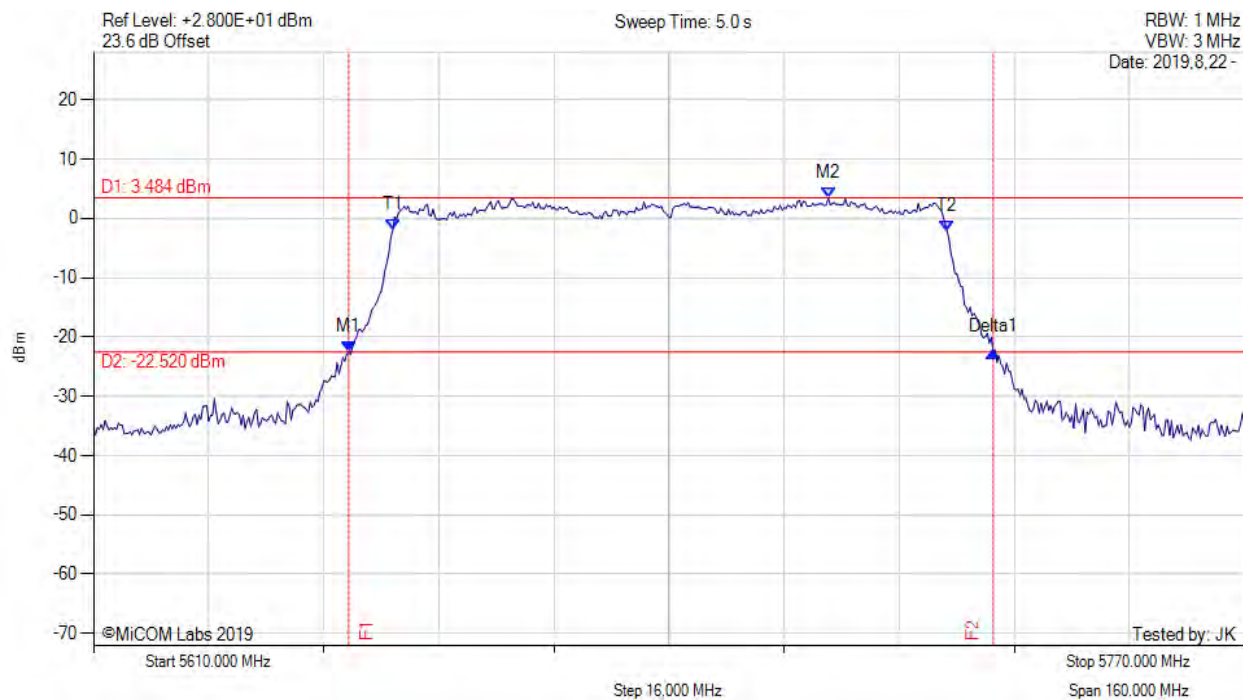

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5645.470 MHz : -22.460 dBm M2 : 5712.130 MHz : 3.484 dBm Delta1 : 89.600 MHz : -0.113 dB T1 : 5651.600 MHz : -1.949 dBm T2 : 5728.667 MHz : -2.246 dBm OBW : 76.855 MHz	Measured 26 dB Bandwidth: 89.600 MHz Measured 99% Bandwidth: 76.855 MHz


[back to matrix](#)



26 dB & 99% BANDWIDTH



Variant: 802.11ac-80, Channel: 5690.00 MHz, Chain b, Temp: 20, Voltage: Vdc

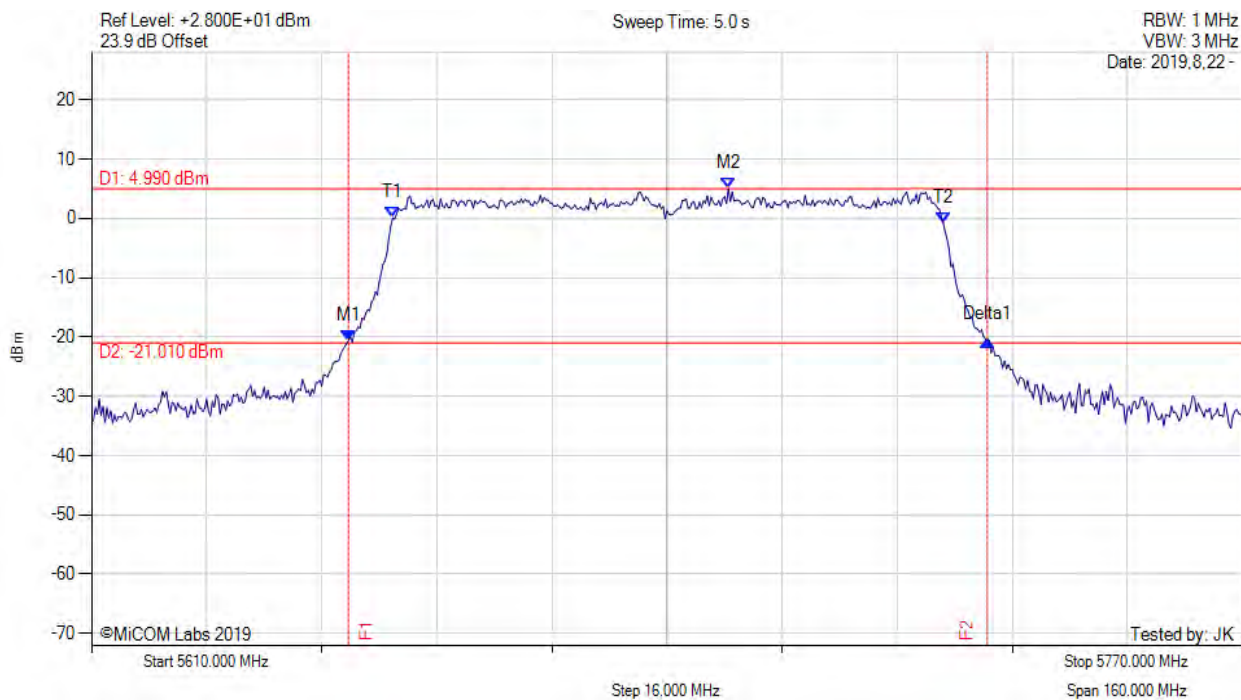

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5645.730 MHz : -20.596 dBm M2 : 5698.530 MHz : 4.990 dBm Delta1 : 88.800 MHz : 0.075 dB T1 : 5651.867 MHz : 0.085 dBm T2 : 5728.400 MHz : -0.747 dBm OBW : 76.595 MHz	Measured 26 dB Bandwidth: 88.800 MHz Measured 99% Bandwidth: 76.595 MHz


[back to matrix](#)





26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5500.00 MHz, Chain a, Temp: 20, Voltage: Vdc

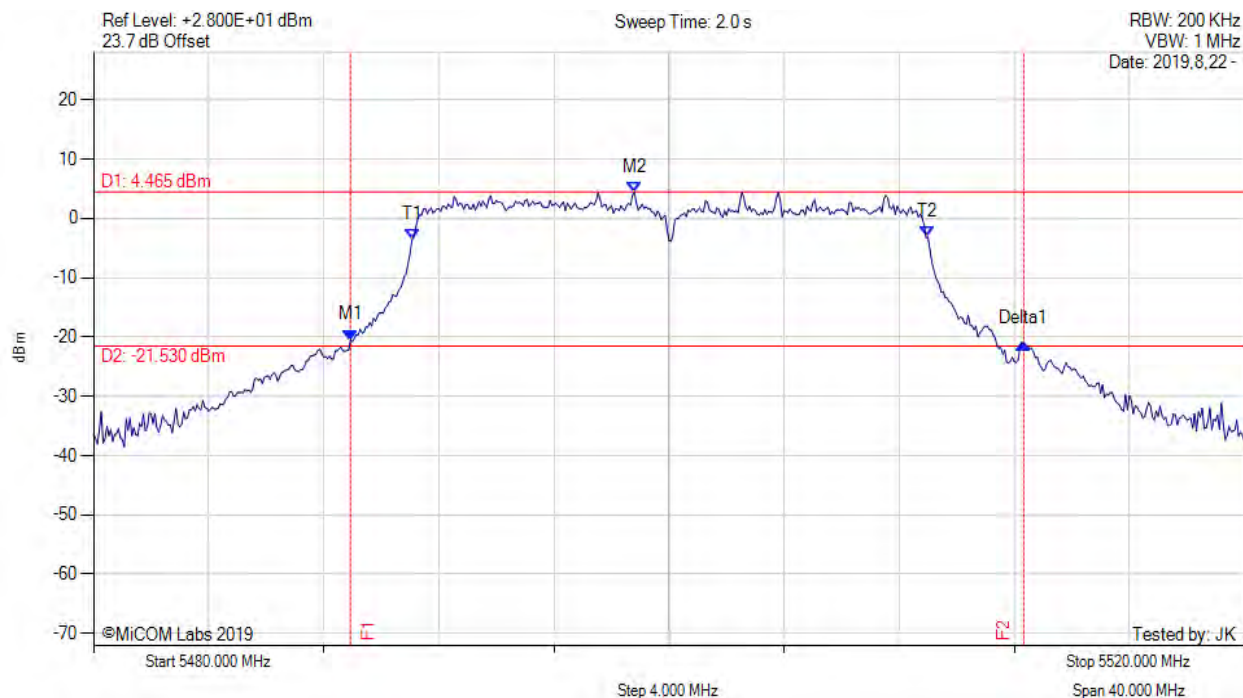


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5488.930 MHz : -20.525 dBm M2 : 5498.800 MHz : 4.465 dBm Delta1 : 23.400 MHz : -0.573 dB T1 : 5491.067 MHz : -3.647 dBm T2 : 5509.000 MHz : -3.183 dBm OBW : 17.887 MHz	Measured 26 dB Bandwidth: 23.400 MHz Measured 99% Bandwidth: 17.887 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH



Variant: 802.11n HT-20, Channel: 5500.00 MHz, Chain b, Temp: 20, Voltage: Vdc

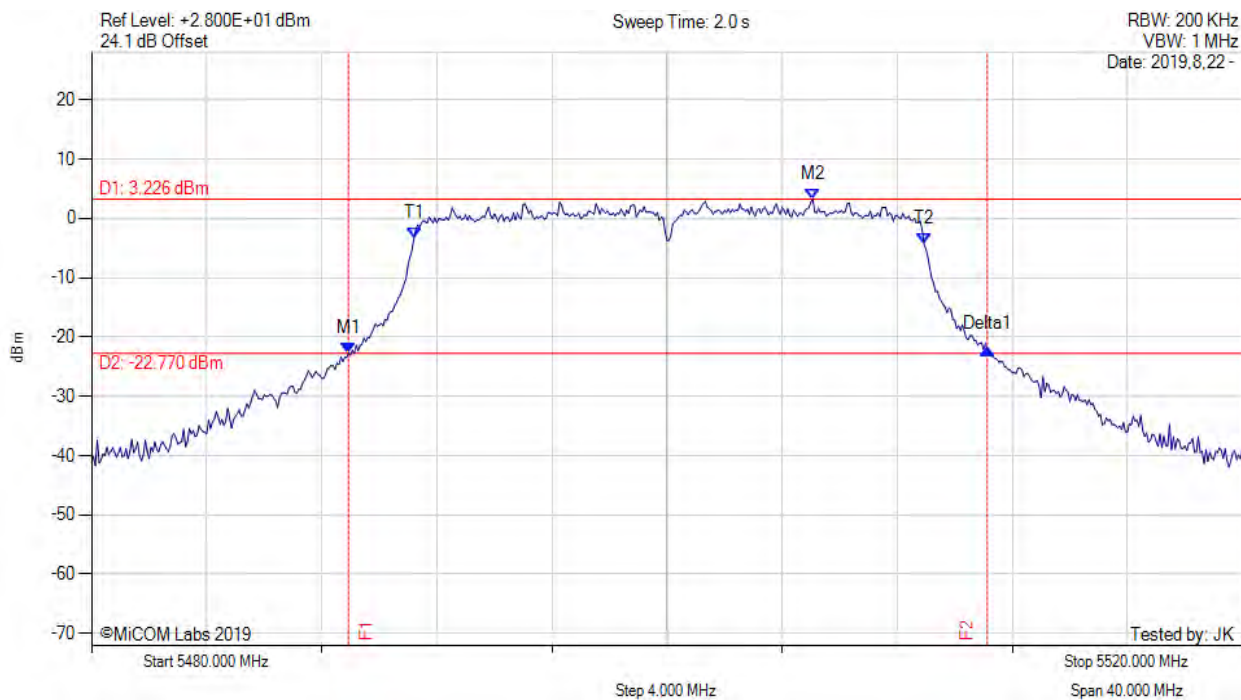


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5488.930 MHz : -22.718 dBm M2 : 5505.070 MHz : 3.226 dBm Delta1 : 22.200 MHz : 0.721 dB T1 : 5491.200 MHz : -3.376 dBm T2 : 5508.933 MHz : -4.329 dBm OBW : 17.745 MHz	Measured 26 dB Bandwidth: 22.200 MHz Measured 99% Bandwidth: 17.745 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH



Variant: 802.11n HT-20, Channel: 5580.00 MHz, Chain a, Temp: 20, Voltage: Vdc

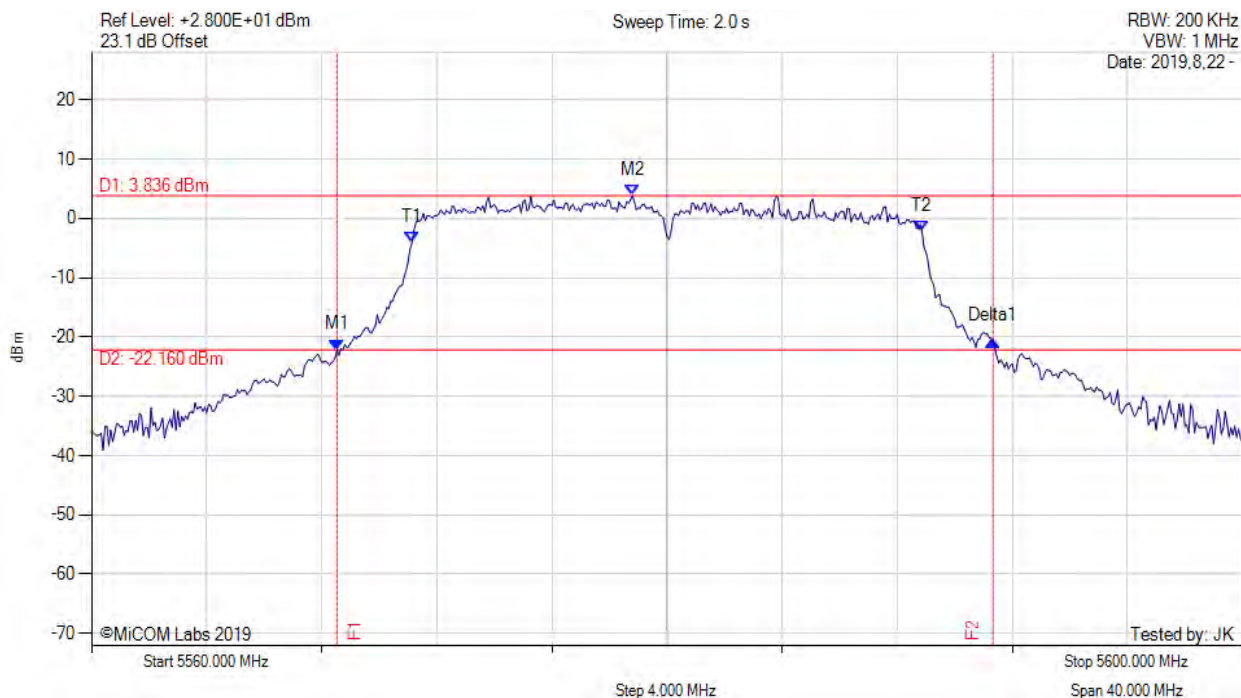


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5568.530 MHz : -22.154 dBm M2 : 5578.800 MHz : 3.836 dBm Delta1 : 22.800 MHz : 1.480 dB T1 : 5571.133 MHz : -4.106 dBm T2 : 5588.867 MHz : -2.265 dBm OBW : 17.761 MHz	Measured 26 dB Bandwidth: 22.800 MHz Measured 99% Bandwidth: 17.761 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH



Variant: 802.11n HT-20, Channel: 5580.00 MHz, Chain b, Temp: 20, Voltage: Vdc

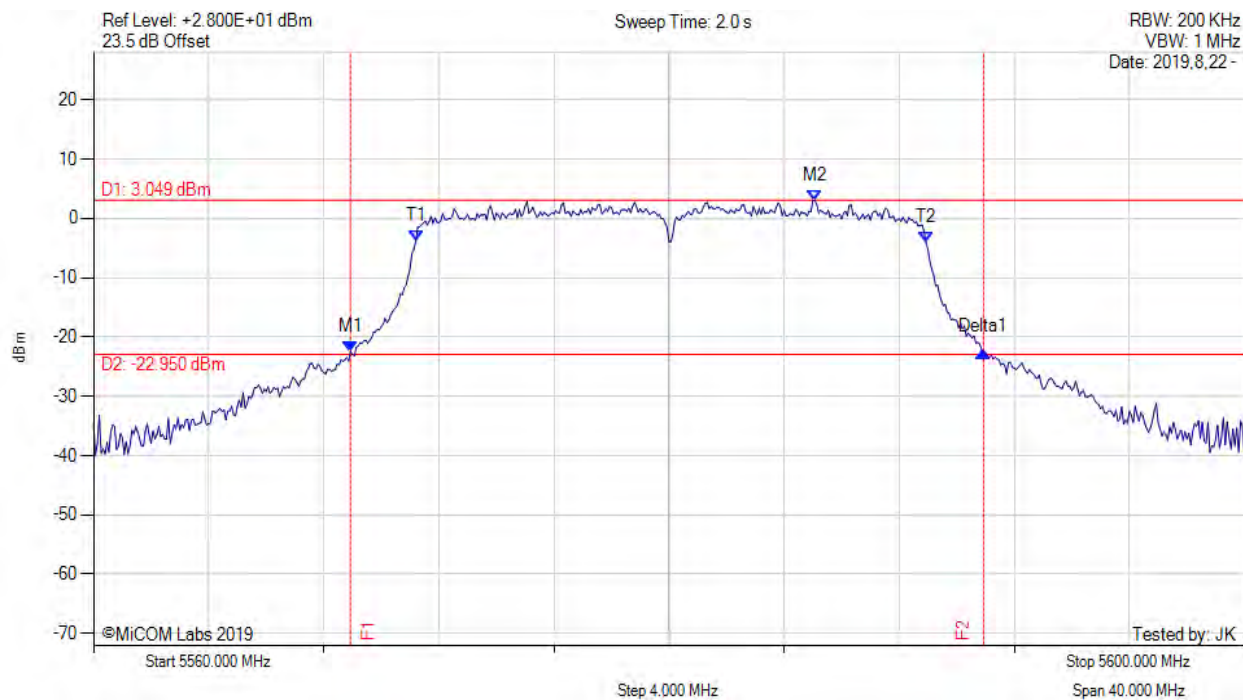


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5568.930 MHz : -22.488 dBm M2 : 5585.070 MHz : 3.049 dBm Delta1 : 22.000 MHz : -0.099 dB T1 : 5571.200 MHz : -3.850 dBm T2 : 5588.933 MHz : -4.095 dBm OBW : 17.739 MHz	Measured 26 dB Bandwidth: 22.000 MHz Measured 99% Bandwidth: 17.739 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH



Variant: 802.11n HT-20, Channel: 5720.00 MHz, Chain a, Temp: 20, Voltage: Vdc

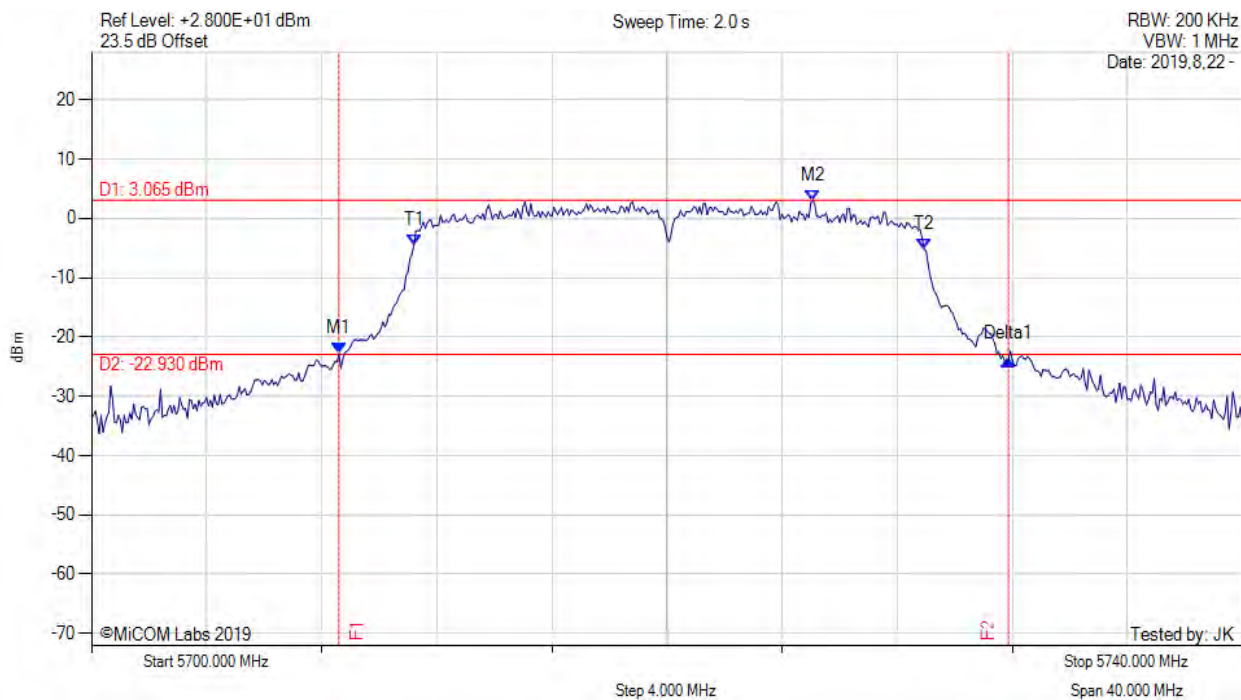

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5708.600 MHz : -22.797 dBm M2 : 5725.070 MHz : 3.065 dBm Delta1 : 23.270 MHz : -1.009 dB T1 : 5711.200 MHz : -4.586 dBm T2 : 5728.933 MHz : -5.217 dBm OBW : 17.762 MHz	Measured 26 dB Bandwidth: 23.270 MHz Measured 99% Bandwidth: 17.762 MHz


[back to matrix](#)





26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5720.00 MHz, Chain b, Temp: 20, Voltage: Vdc

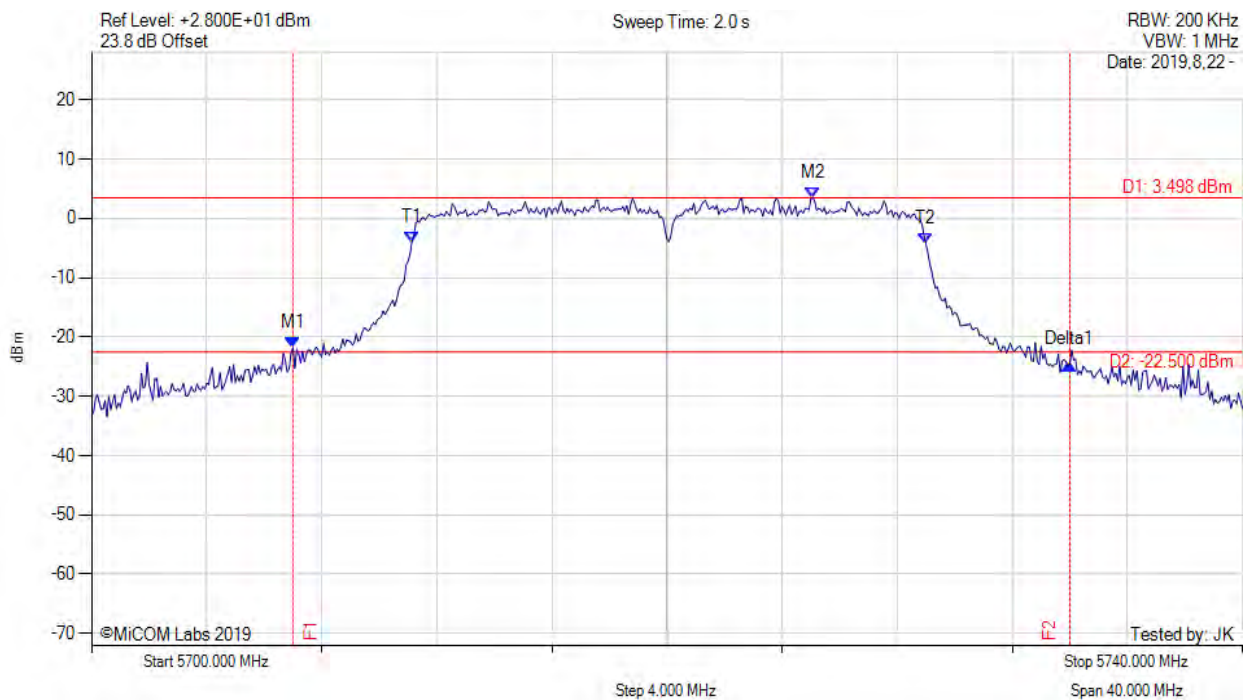

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5707.000 MHz : -21.750 dBm M2 : 5725.070 MHz : 3.498 dBm Delta1 : 27.000 MHz : -2.946 dB T1 : 5711.133 MHz : -3.953 dBm T2 : 5729.000 MHz : -4.364 dBm OBW : 17.882 MHz	Measured 26 dB Bandwidth: 27.000 MHz Measured 99% Bandwidth: 17.882 MHz


[back to matrix](#)



26 dB & 99% BANDWIDTH



Variant: 802.11n HT-40, Channel: 5510.00 MHz, Chain a, Temp: 20, Voltage: Vdc

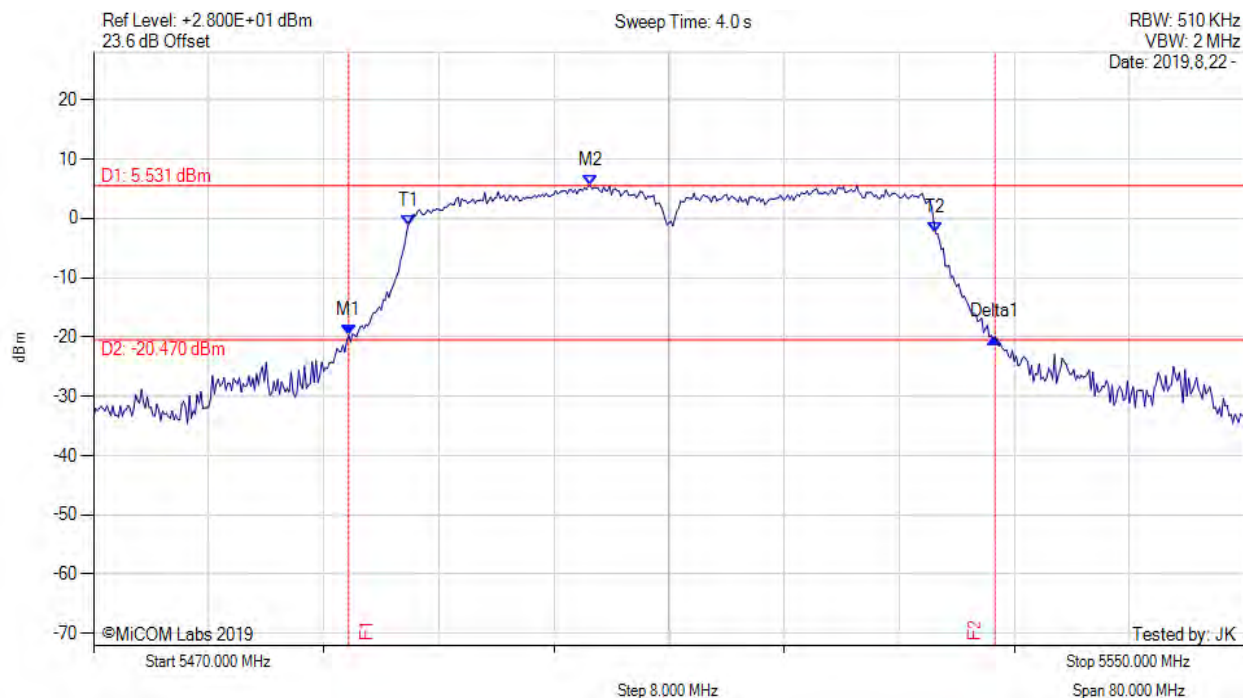


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5487.730 MHz : -19.668 dBm M2 : 5504.530 MHz : 5.531 dBm Delta1 : 44.930 MHz : -0.386 dB T1 : 5491.867 MHz : -1.166 dBm T2 : 5528.533 MHz : -2.490 dBm OBW : 36.632 MHz	Measured 26 dB Bandwidth: 44.930 MHz Measured 99% Bandwidth: 36.632 MHz

[back to matrix](#)



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5510.00 MHz, Chain b, Temp: 20, Voltage: Vdc

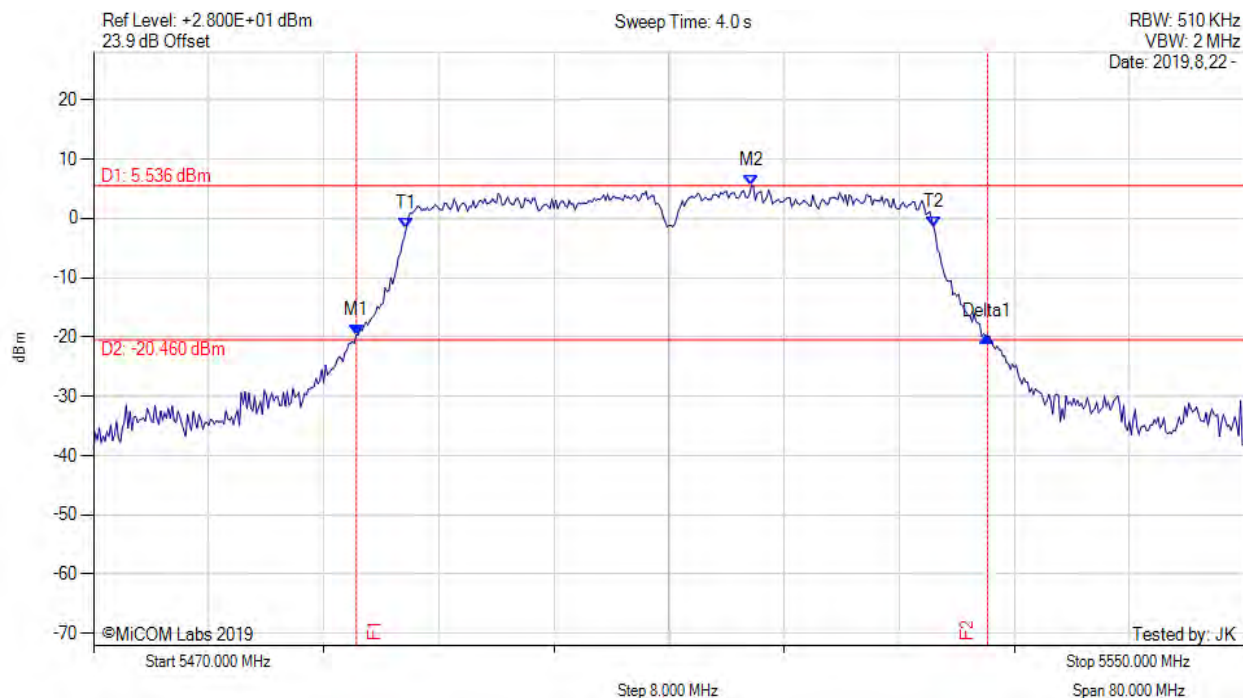


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5488.270 MHz : -19.612 dBm M2 : 5515.730 MHz : 5.536 dBm Delta1 : 43.870 MHz : -0.284 dB T1 : 5491.733 MHz : -1.722 dBm T2 : 5528.400 MHz : -1.442 dBm OBW : 36.643 MHz	Measured 26 dB Bandwidth: 43.870 MHz Measured 99% Bandwidth: 36.643 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH



Variant: 802.11n HT-40, Channel: 5550.00 MHz, Chain a, Temp: 20, Voltage: Vdc

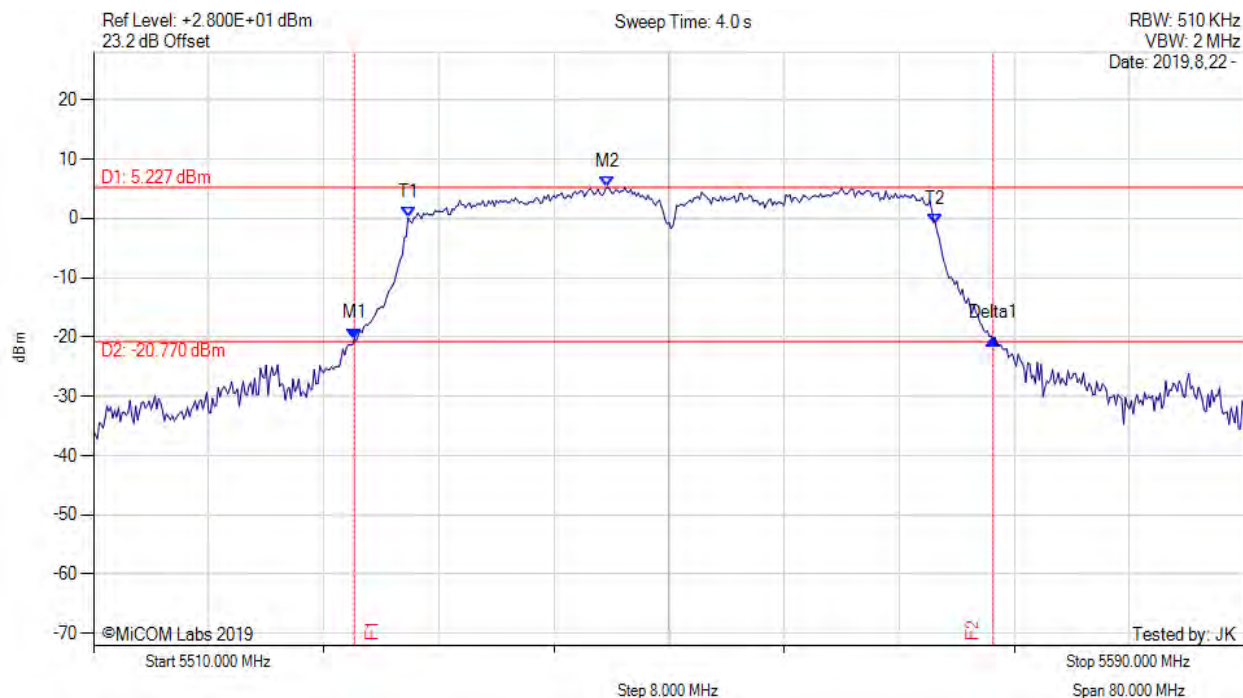


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5528.130 MHz : -20.300 dBm M2 : 5545.730 MHz : 5.227 dBm Delta1 : 44.400 MHz : 0.012 dB T1 : 5531.867 MHz : 0.088 dBm T2 : 5568.533 MHz : -1.057 dBm OBW : 36.713 MHz	Measured 26 dB Bandwidth: 44.400 MHz Measured 99% Bandwidth: 36.713 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH



Variant: 802.11n HT-40, Channel: 5550.00 MHz, Chain b, Temp: 20, Voltage: Vdc

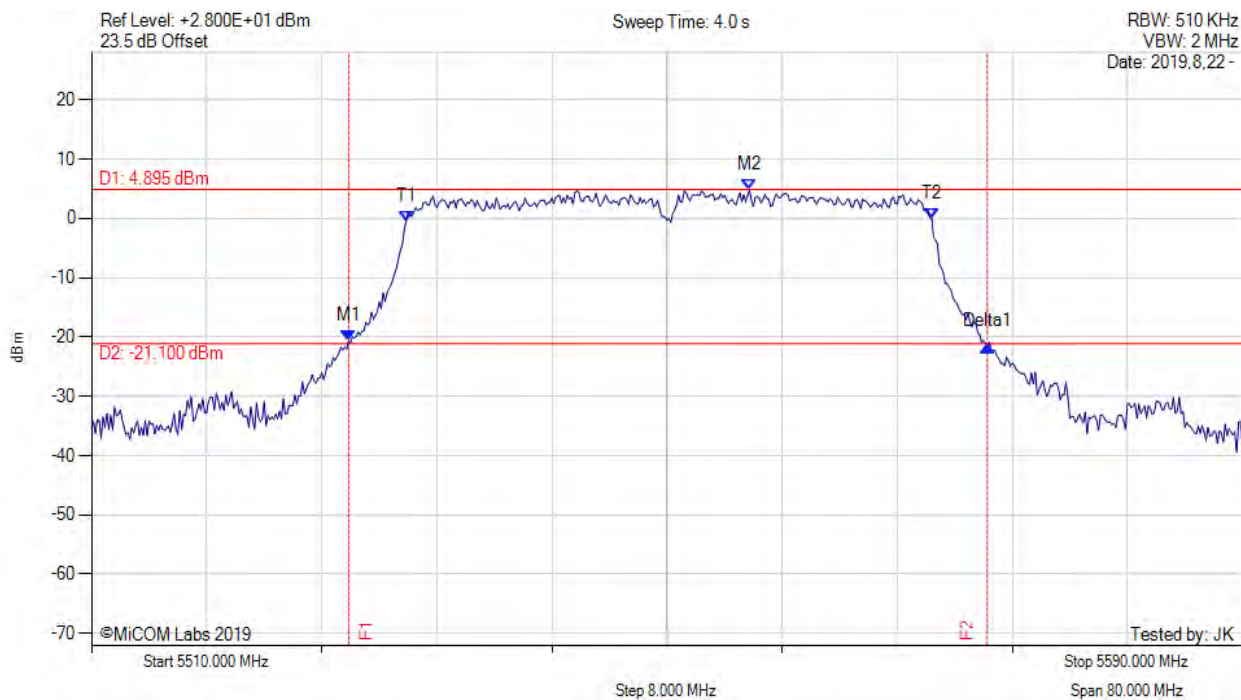


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5527.870 MHz : -20.621 dBm M2 : 5555.730 MHz : 4.895 dBm Delta1 : 44.400 MHz : -0.982 dB T1 : 5531.867 MHz : -0.469 dBm T2 : 5568.400 MHz : 0.026 dBm OBW : 36.573 MHz	Measured 26 dB Bandwidth: 44.400 MHz Measured 99% Bandwidth: 36.573 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH



Variant: 802.11n HT-40, Channel: 5710.00 MHz, Chain a, Temp: 20, Voltage: Vdc

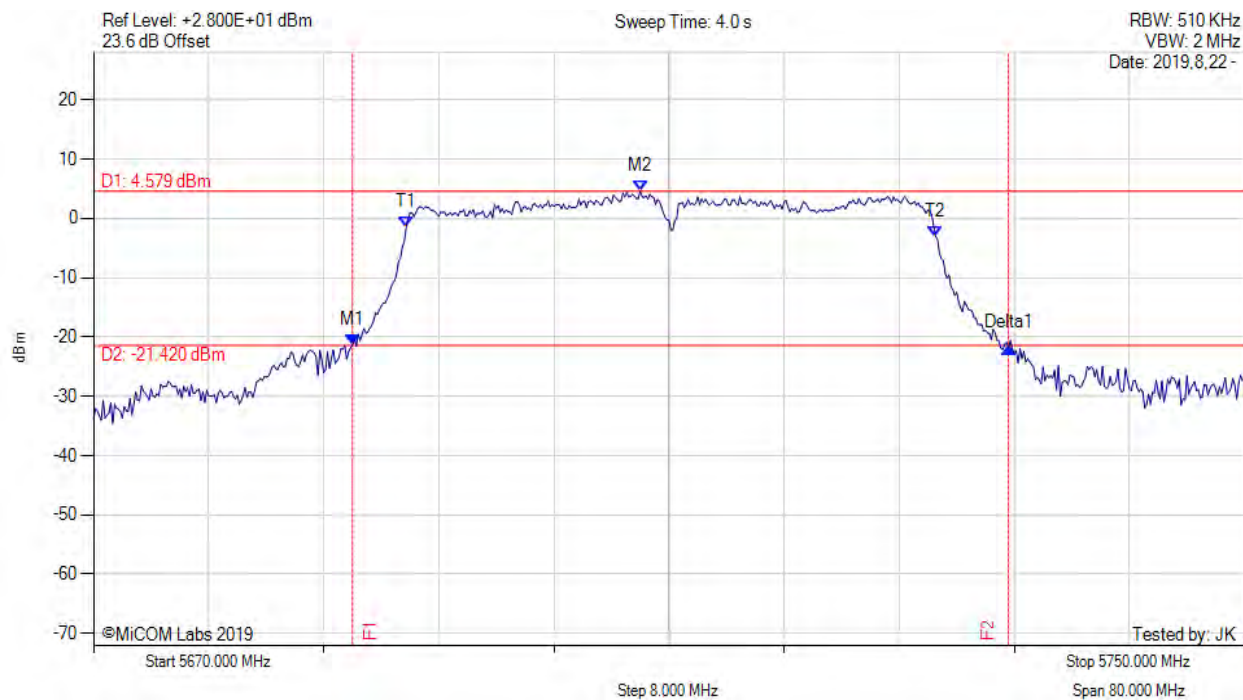

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5688.000 MHz : -21.284 dBm M2 : 5708.000 MHz : 4.579 dBm Delta1 : 45.600 MHz : -0.470 dB T1 : 5691.733 MHz : -1.438 dBm T2 : 5728.533 MHz : -3.073 dBm OBW : 36.873 MHz	Measured 26 dB Bandwidth: 45.600 MHz Measured 99% Bandwidth: 36.873 MHz


[back to matrix](#)



26 dB & 99% BANDWIDTH



Variant: 802.11n HT-40, Channel: 5710.00 MHz, Chain b, Temp: 20, Voltage: Vdc

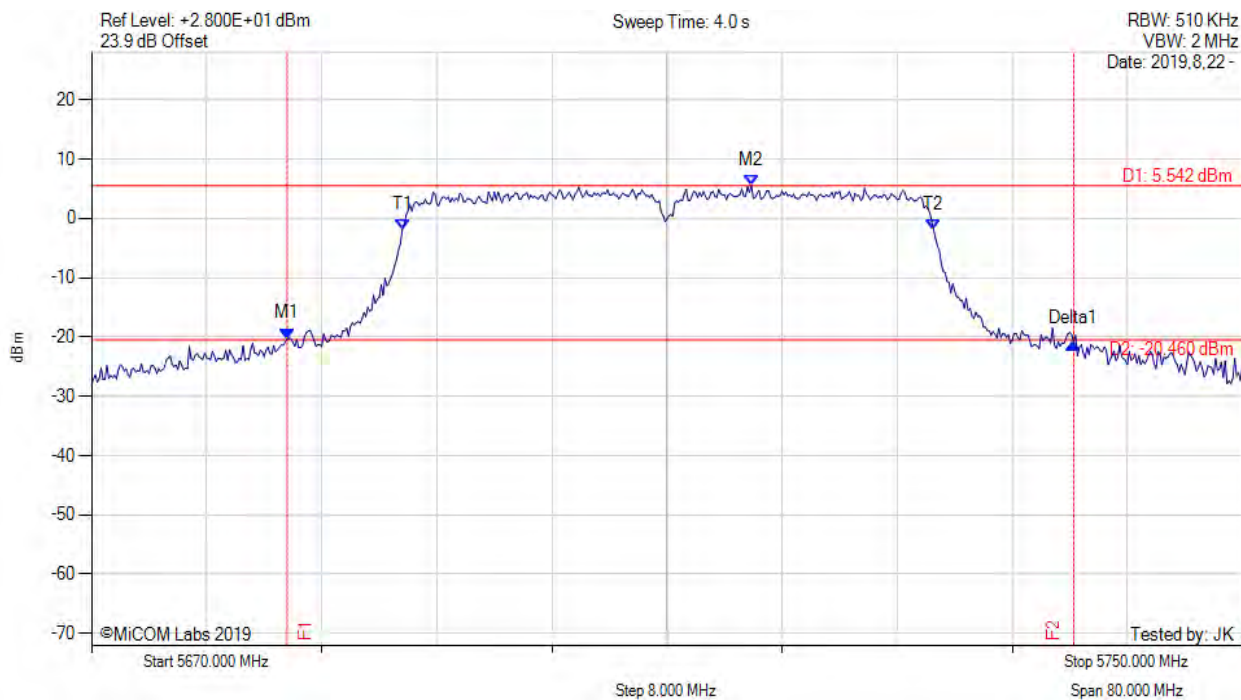

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 5683.600 MHz : -20.286 dBm M2 : 5715.870 MHz : 5.542 dBm Delta1 : 54.670 MHz : -0.755 dB T1 : 5691.600 MHz : -1.850 dBm T2 : 5728.533 MHz : -1.956 dBm OBW : 36.908 MHz	Measured 26 dB Bandwidth: 54.670 MHz Measured 99% Bandwidth: 36.908 MHz

[back to matrix](#)




## A.2. Power Spectral Density



### POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5260.00 MHz, Chain a, Temp: 20, Voltage: Vdc

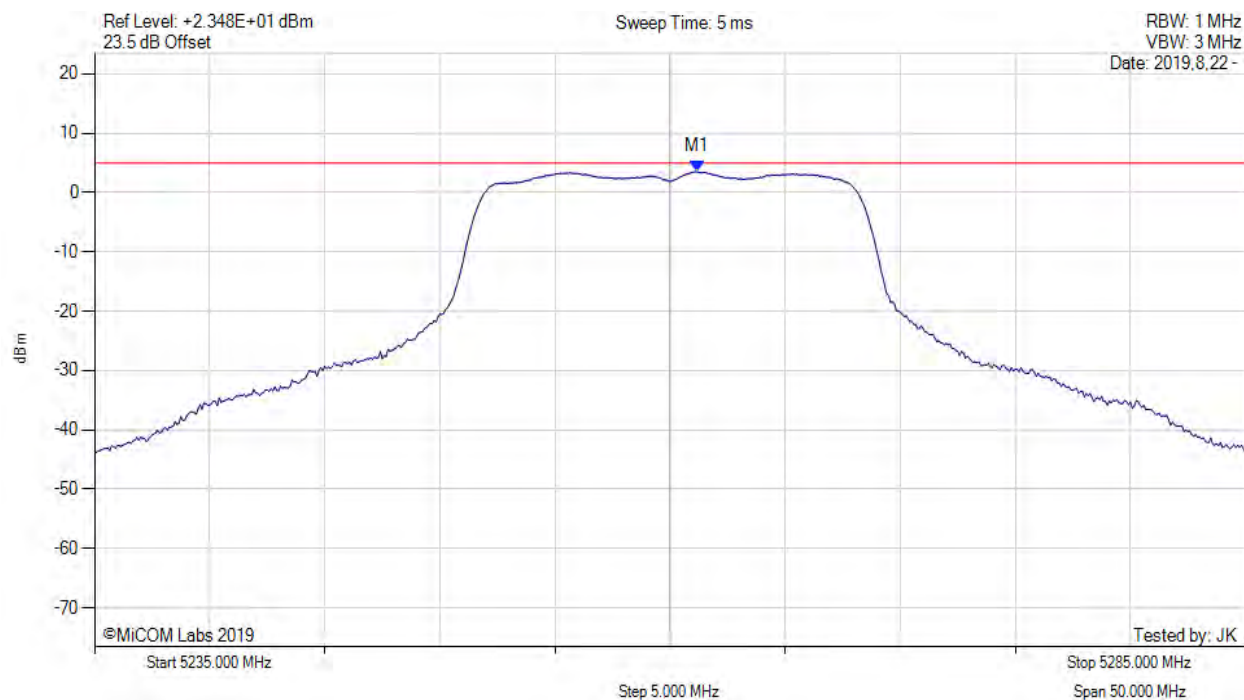


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5261.170 MHz : 3.518 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5260.00 MHz, Chain b, Temp: 20, Voltage: Vdc

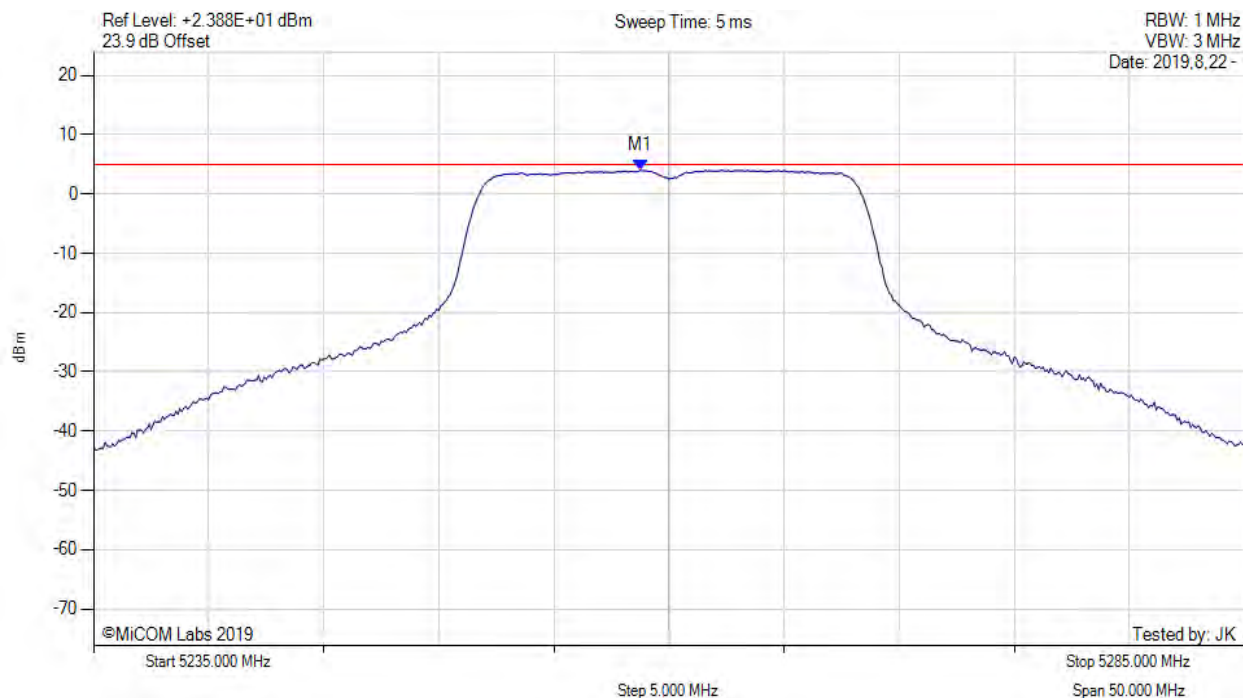


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5258.750 MHz : 4.022 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5260.00 MHz, SUM, Temp: 20, Voltage: Vdc

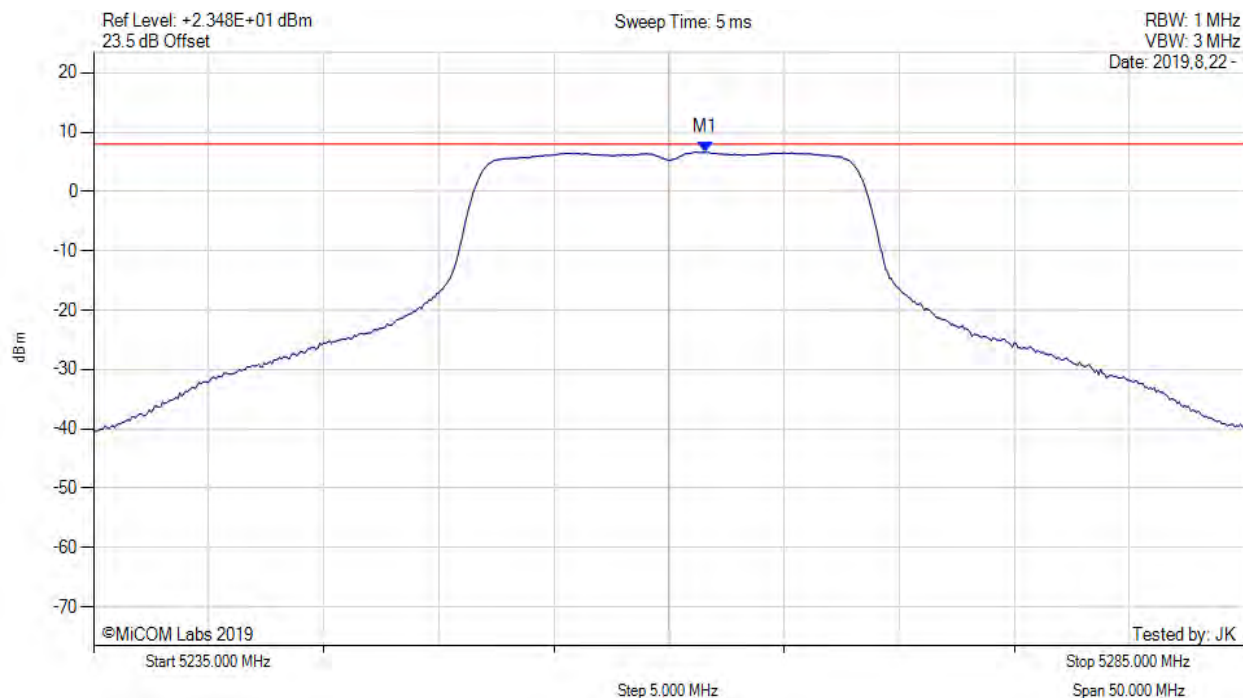


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5261.600 MHz : 6.678 dBm M1 + DCCF : 5261.600 MHz : 6.766 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: $\leq 8.0$ dBm Margin: -1.2 dB

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5300.00 MHz, Chain a, Temp: 20, Voltage: Vdc

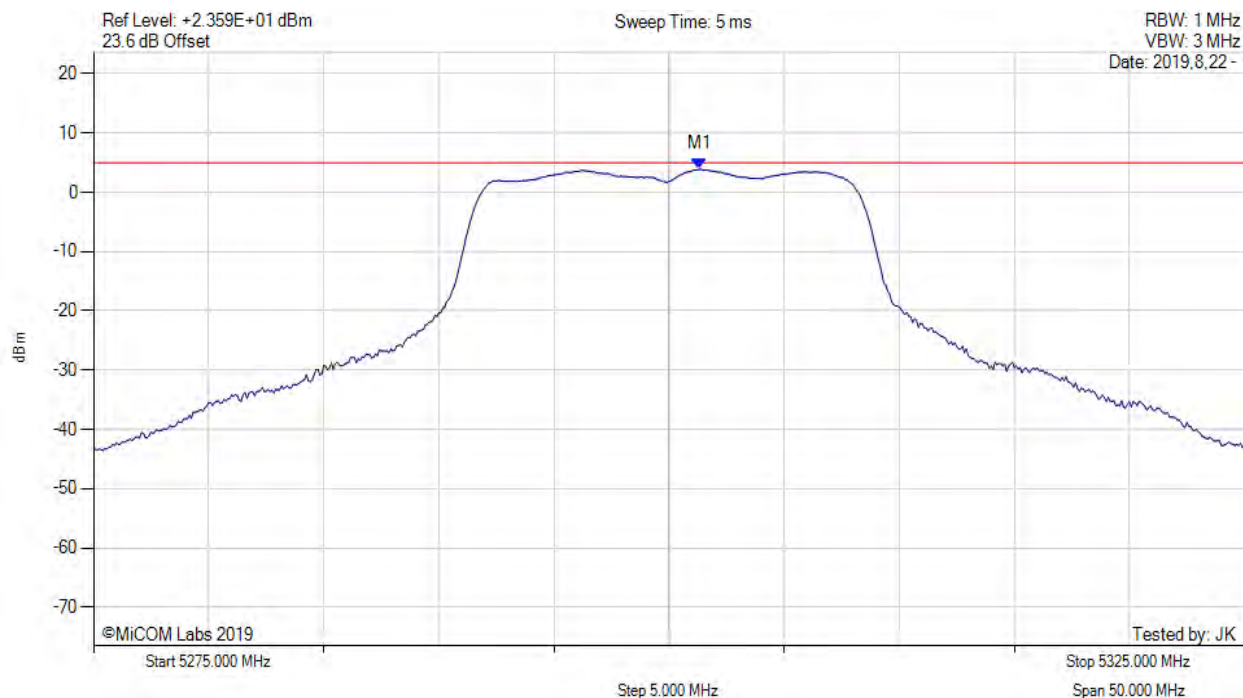


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5301.330 MHz : 3.889 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5300.00 MHz, Chain b, Temp: 20, Voltage: Vdc

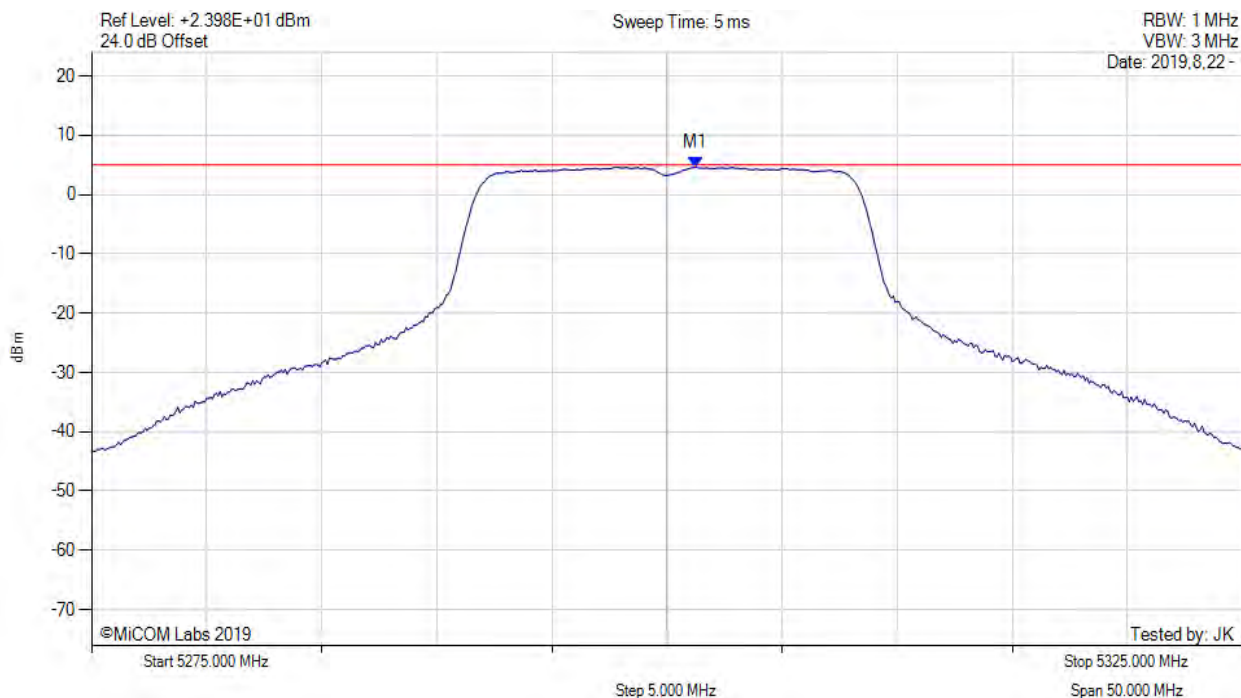

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5301.250 MHz : 4.622 dBm	Channel Frequency: 5300.00 MHz


[back to matrix](#)



# POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5300.00 MHz, SUM, Temp: 20, Voltage: Vdc

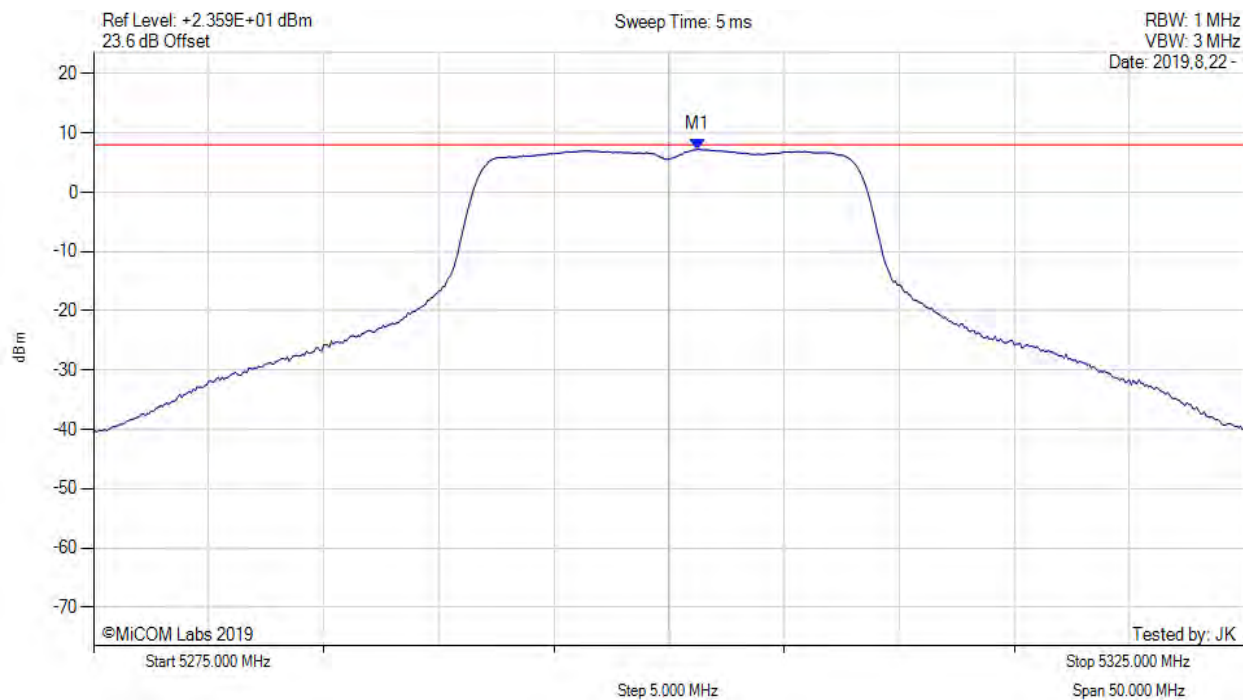

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5301.300 MHz : 7.239 dBm M1 + DCCF : 5301.300 MHz : 7.327 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: $\leq 8.0$ dBm Margin: -0.7 dB


[back to matrix](#)



# POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5320.00 MHz, Chain a, Temp: 20, Voltage: Vdc

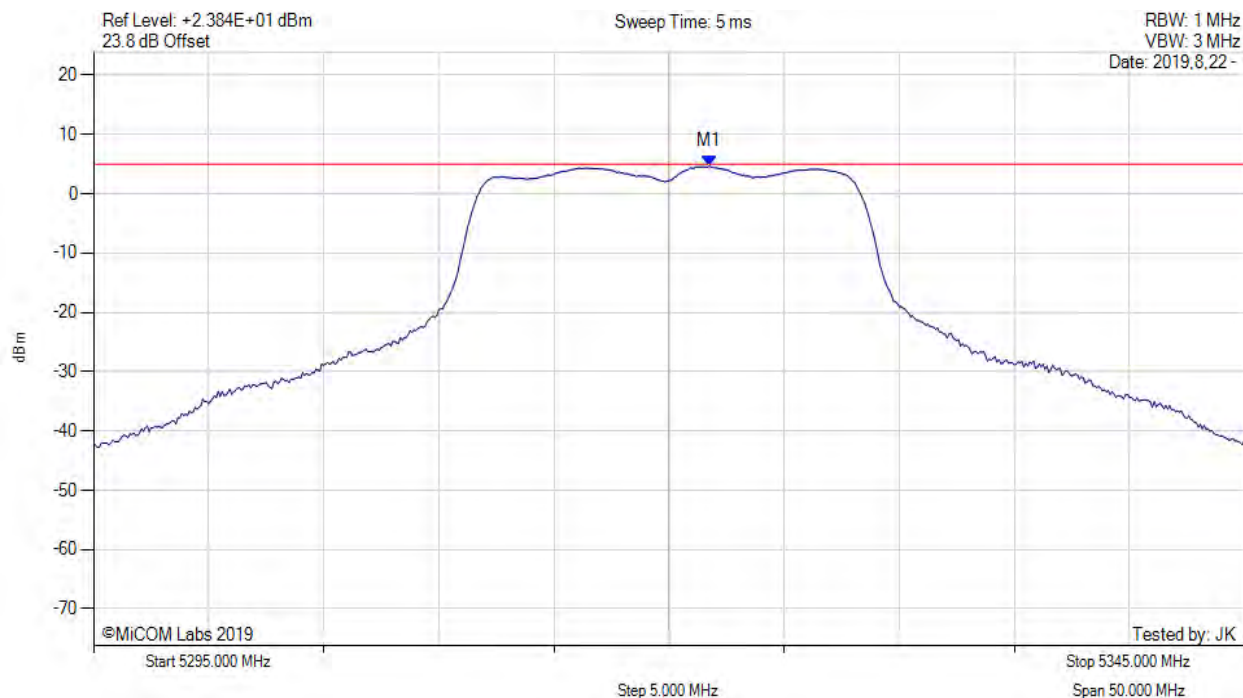


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5321.750 MHz : 4.651 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5320.00 MHz, Chain b, Temp: 20, Voltage: Vdc

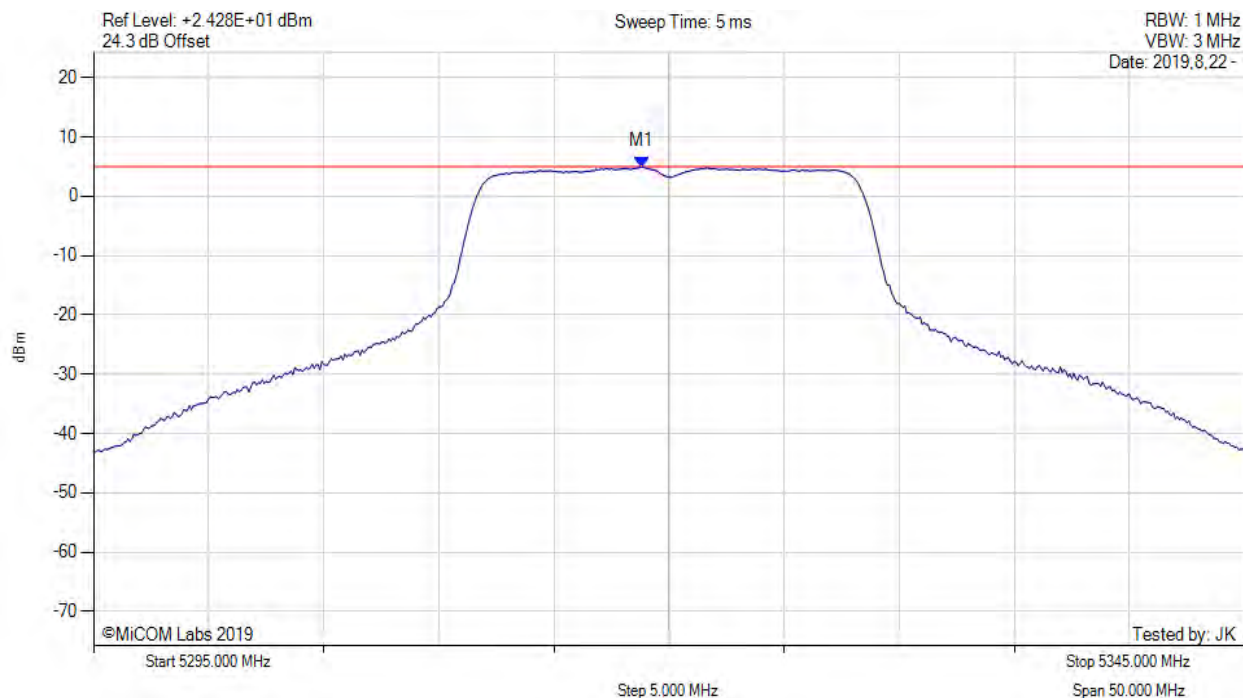


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5318.830 MHz : 4.977 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5320.00 MHz, SUM, Temp: 20, Voltage: Vdc

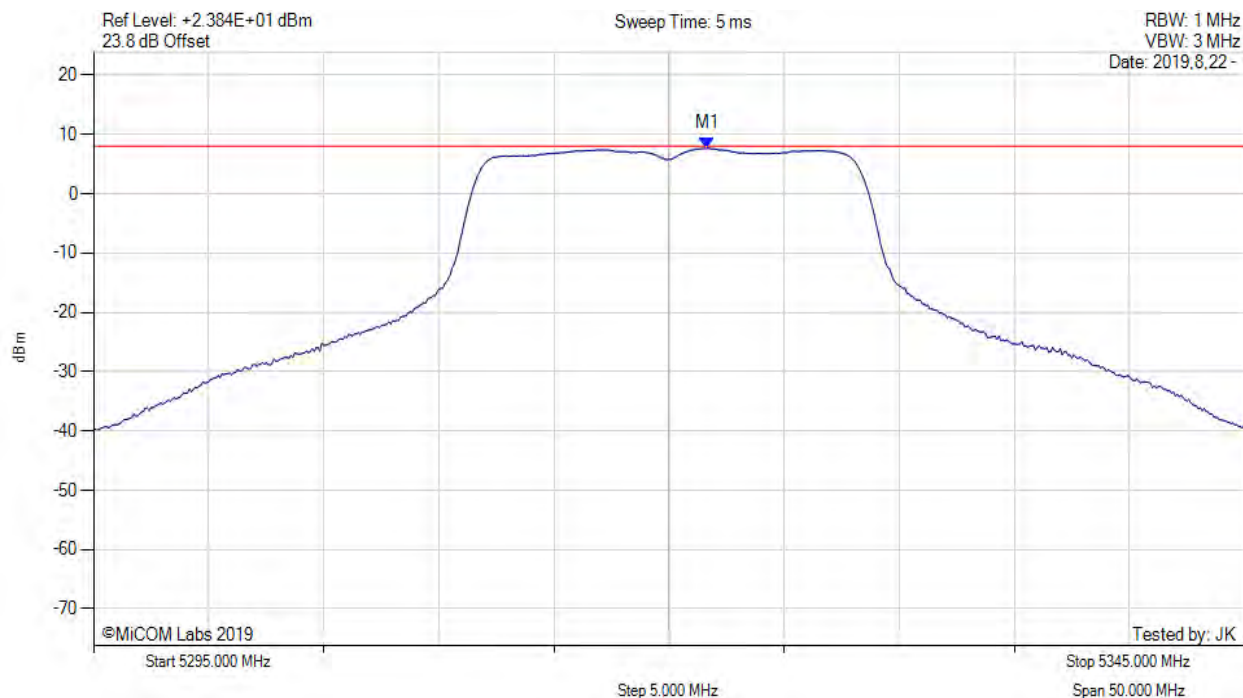


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5321.700 MHz : 7.682 dBm M1 + DCCF : 5321.700 MHz : 7.770 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: $\leq 8.0$ dBm Margin: -0.2 dB

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5290.00 MHz, Chain a, Temp: 20, Voltage: Vdc

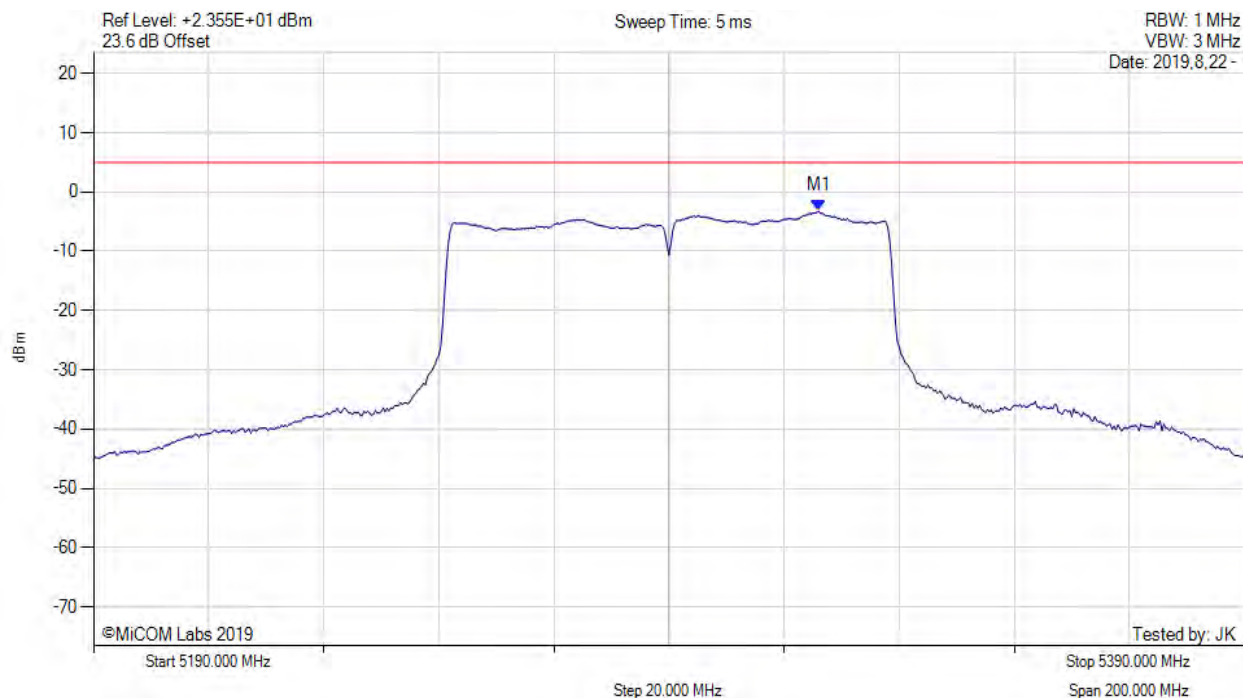


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5316.000 MHz : -3.223 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5290.00 MHz, Chain b, Temp: 20, Voltage: Vdc

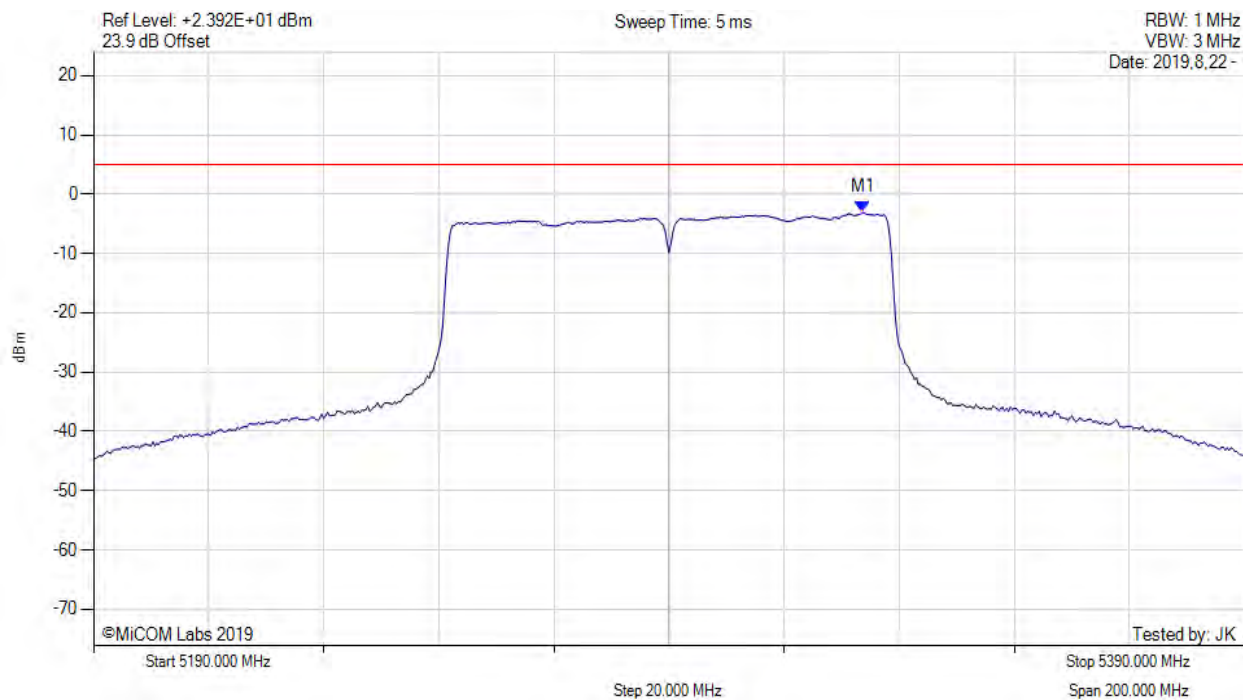

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5323.700 MHz : -3.027 dBm	Limit: ≤ 4.990 dBm


[back to matrix](#)



# POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5290.00 MHz, SUM, Temp: 20, Voltage: Vdc

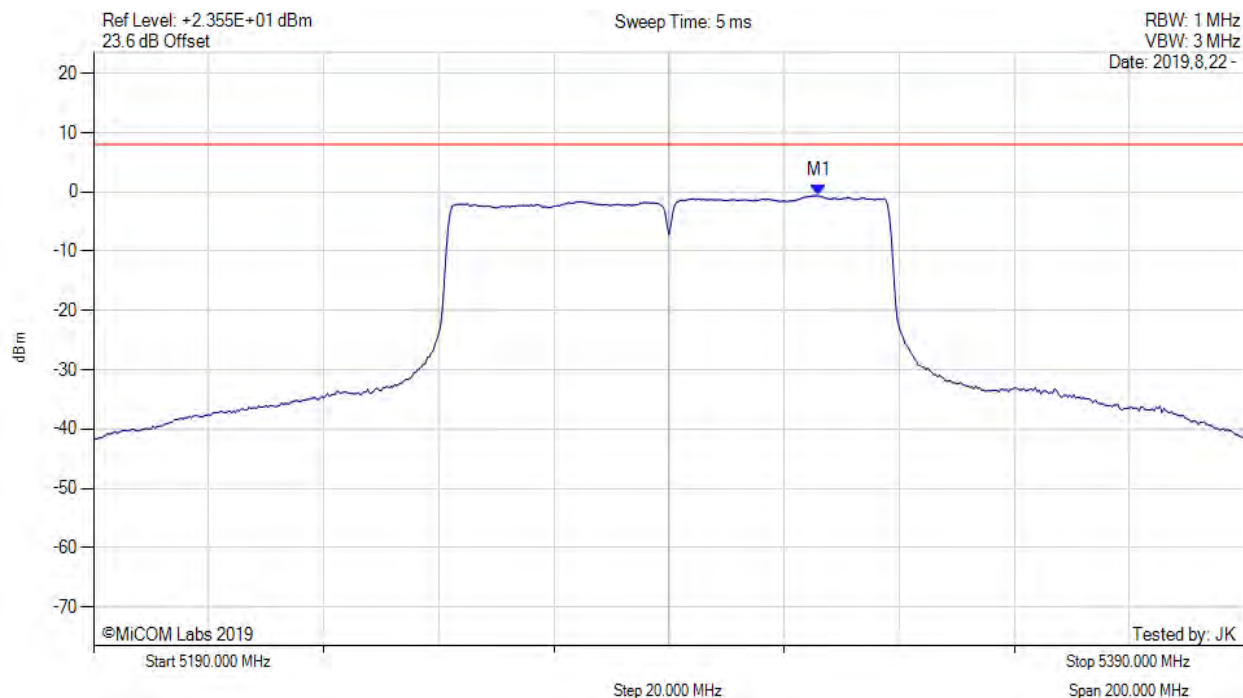


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5316.000 MHz : -0.583 dBm M1 + DCCF : 5316.000 MHz : -0.495 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: ≤ 8.0 dBm Margin: -8.5 dB

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5260.00 MHz, Chain a, Temp: 20, Voltage: Vdc

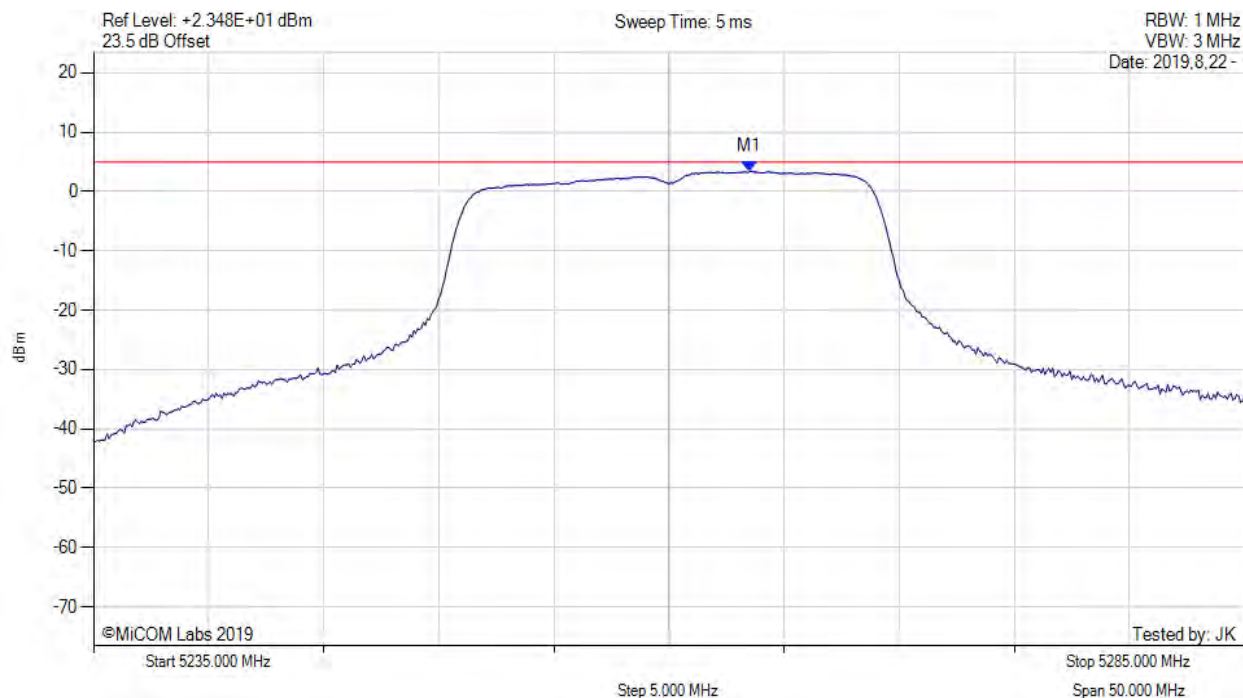


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5263.500 MHz : 3.422 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5260.00 MHz, Chain b, Temp: 20, Voltage: Vdc

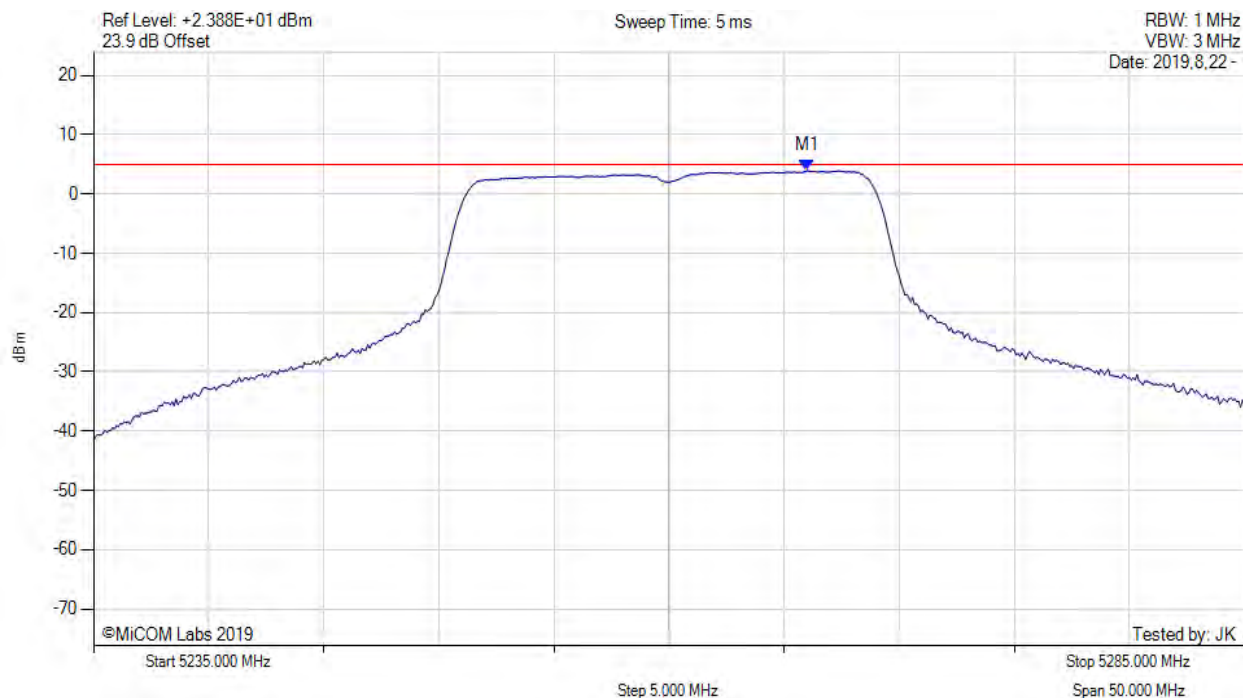


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5266.000 MHz : 3.918 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5260.00 MHz, SUM, Temp: 20, Voltage: Vdc

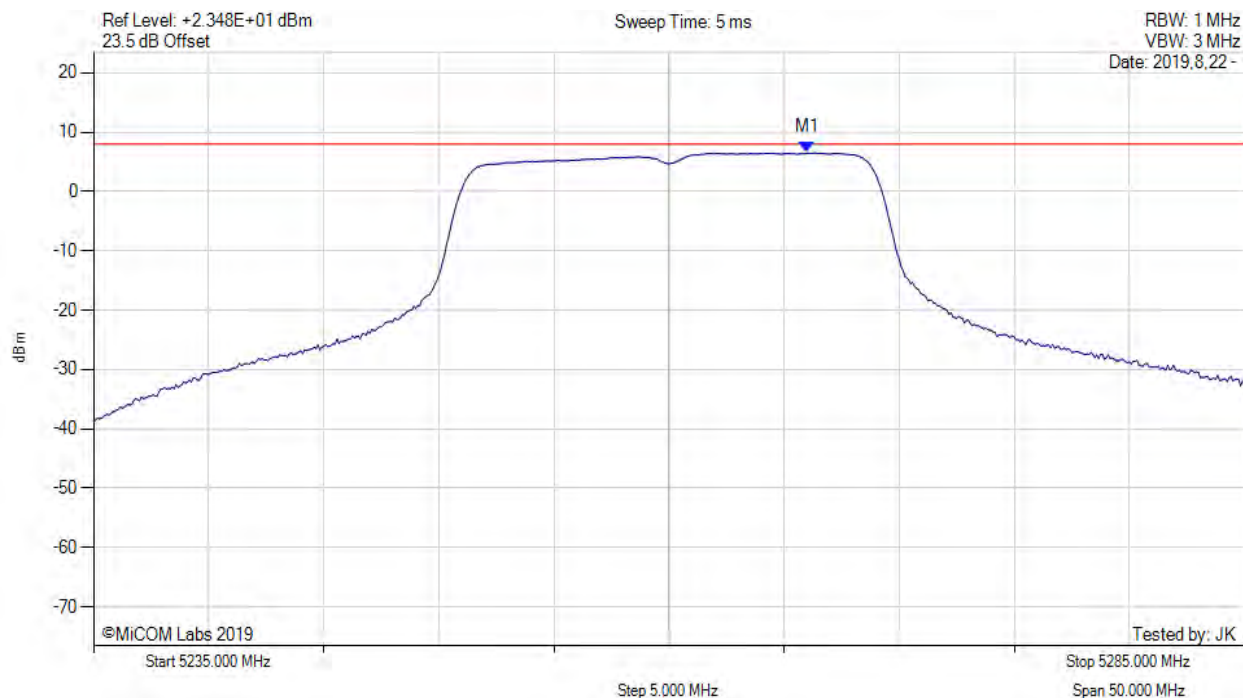


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5266.000 MHz : 6.535 dBm M1 + DCCF : 5266.000 MHz : 6.623 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: ≤ 8.0 dBm Margin: -1.4 dB

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5300.00 MHz, Chain a, Temp: 20, Voltage: Vdc

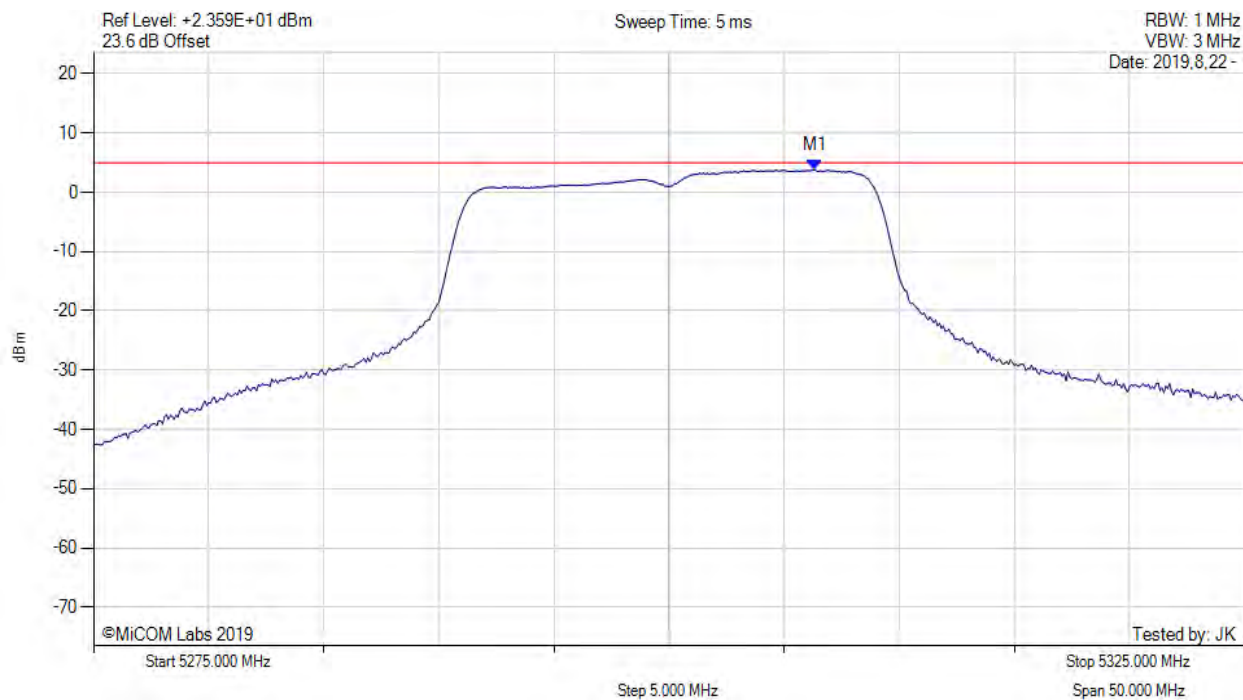

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5306.330 MHz : 3.761 dBm	Limit: ≤ 4.990 dBm


[back to matrix](#)



# POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5300.00 MHz, Chain b, Temp: 20, Voltage: Vdc

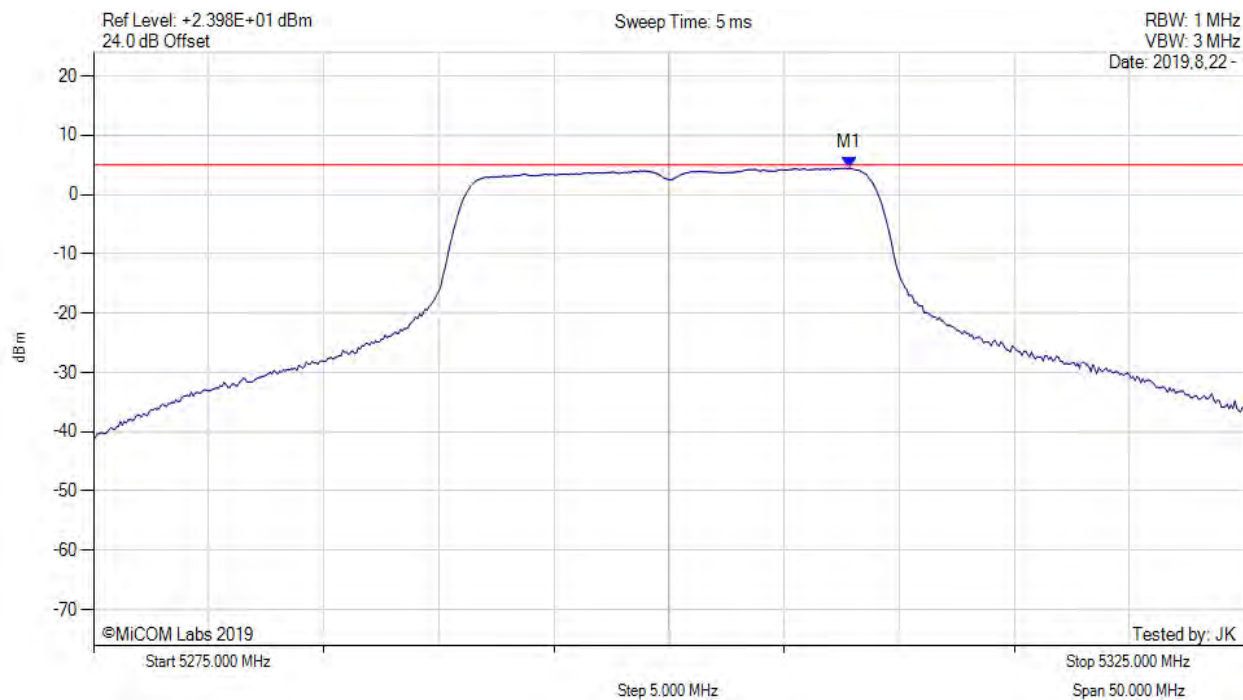


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5307.830 MHz : 4.467 dBm	Channel Frequency: 5300.00 MHz

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5300.00 MHz, SUM, Temp: 20, Voltage: Vdc

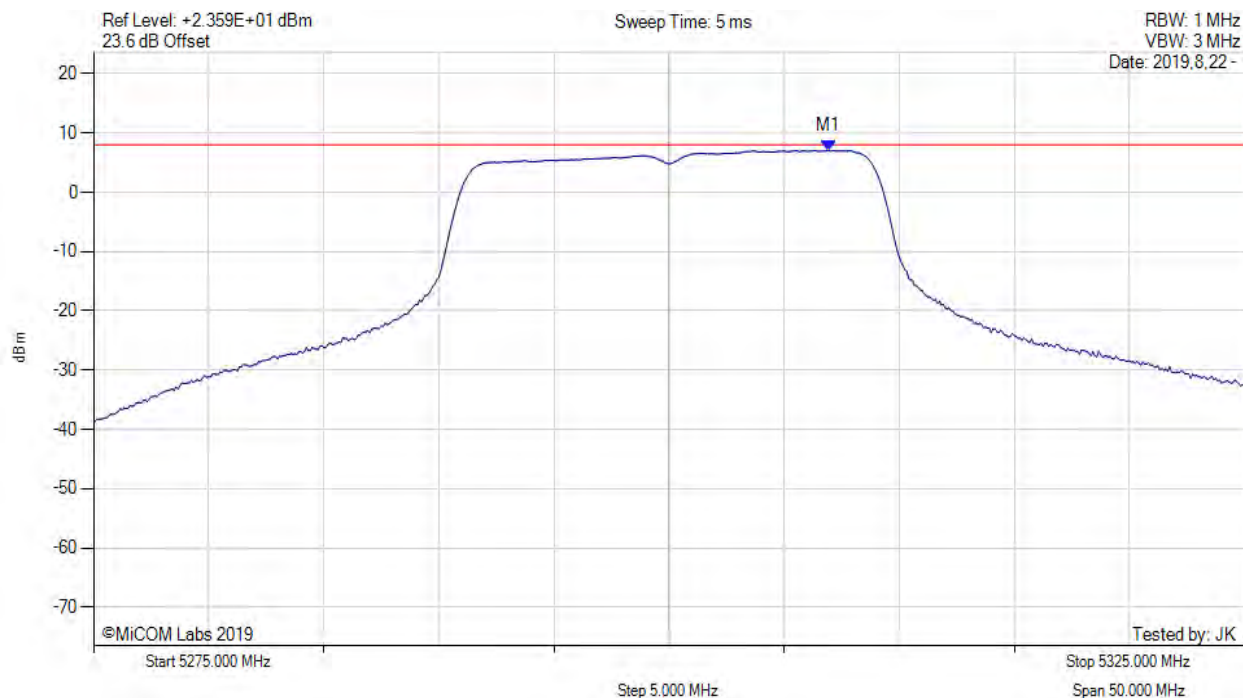


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5306.900 MHz : 7.065 dBm M1 + DCCF : 5306.900 MHz : 7.153 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: $\leq 8.0$ dBm Margin: -0.9 dB

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5320.00 MHz, Chain a, Temp: 20, Voltage: Vdc

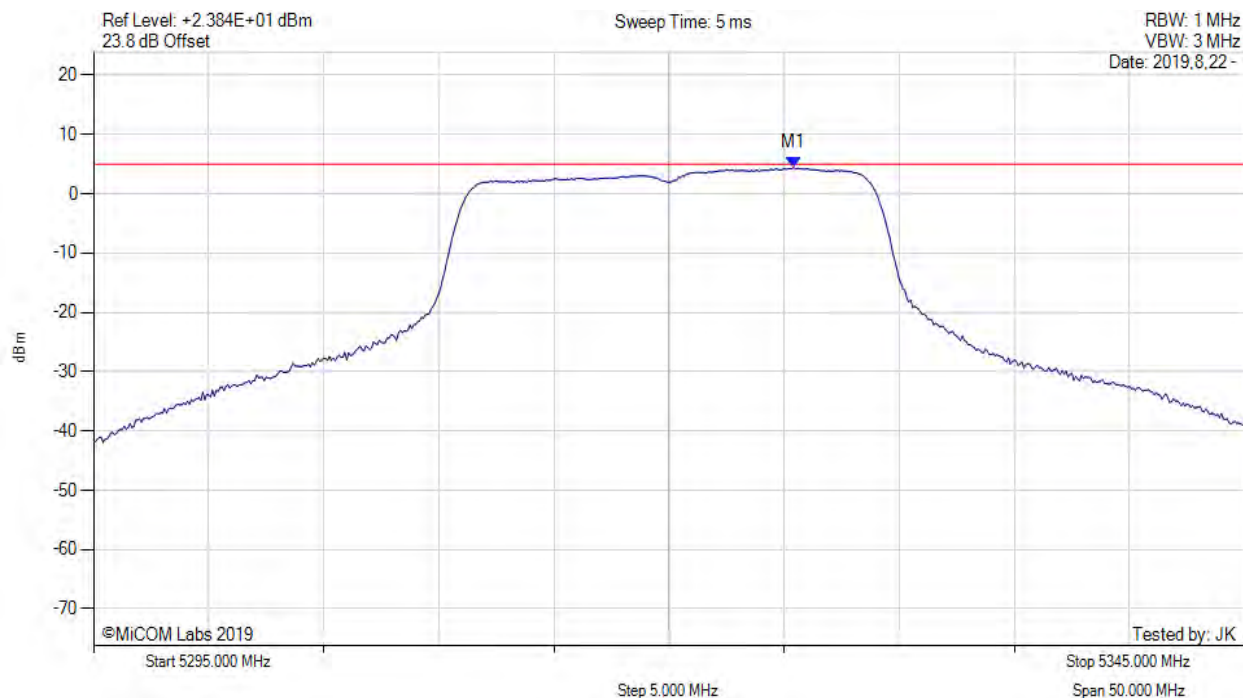


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5325.420 MHz : 4.423 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5320.00 MHz, Chain b, Temp: 20, Voltage: Vdc

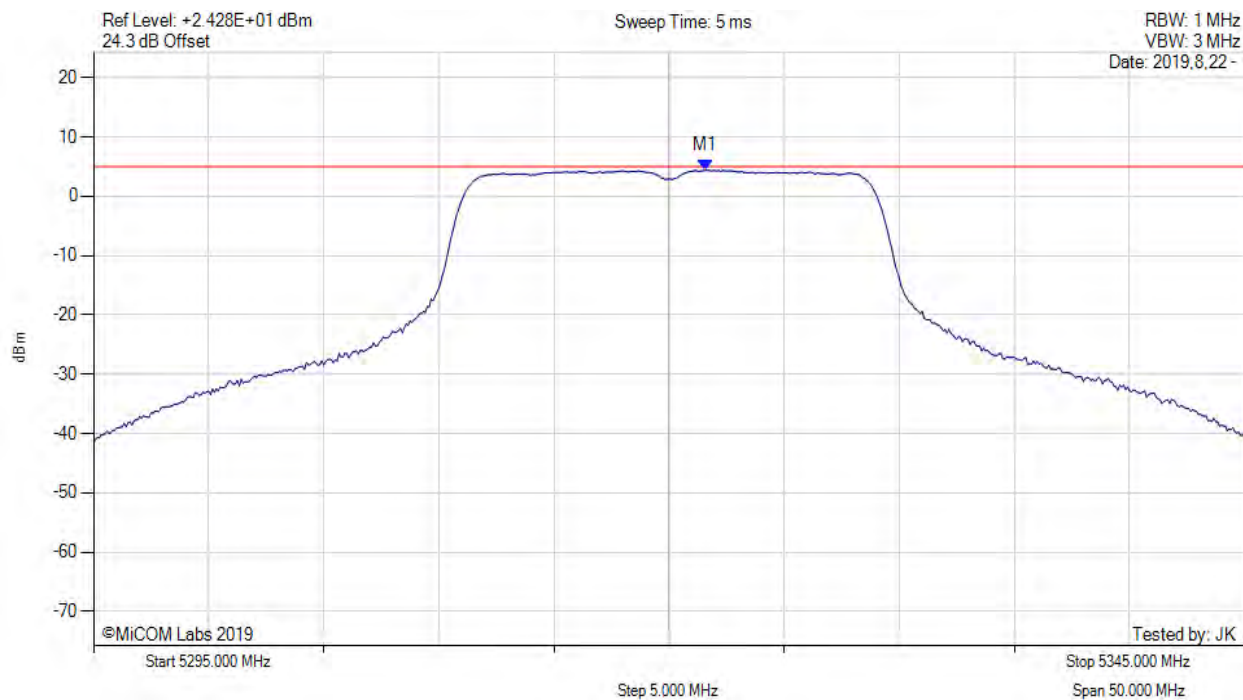


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5321.580 MHz : 4.395 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5320.00 MHz, SUM, Temp: 20, Voltage: Vdc

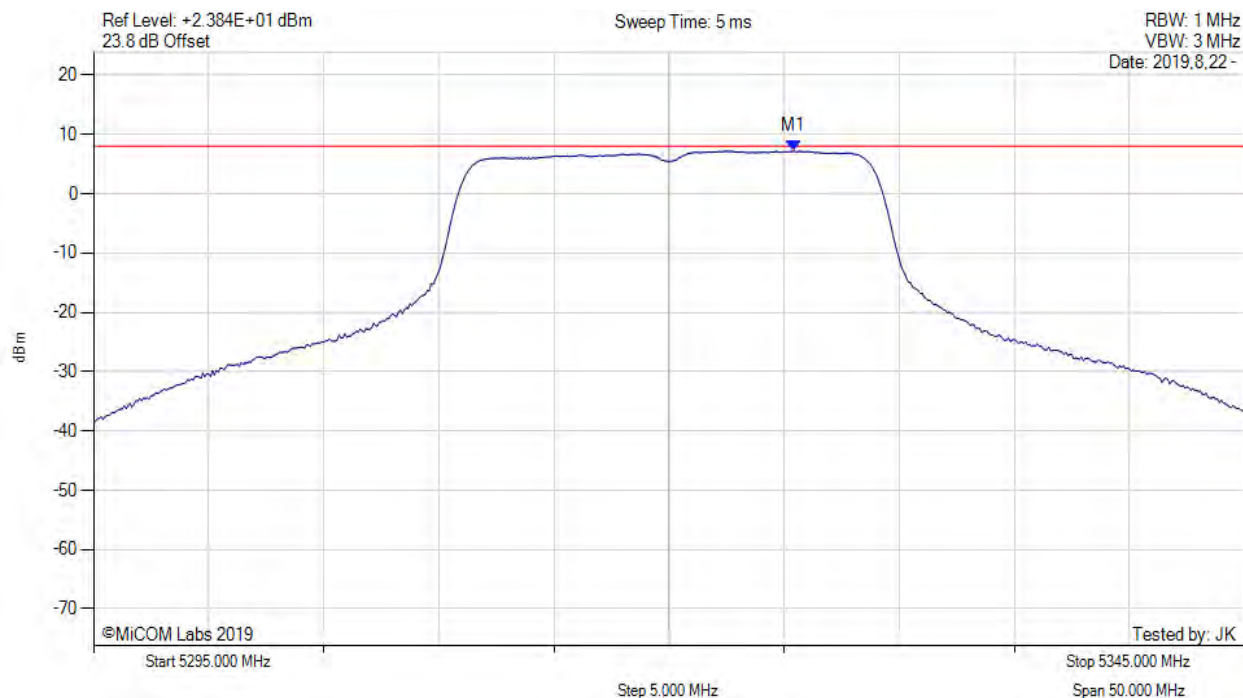

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5325.400 MHz : 7.236 dBm M1 + DCCF : 5325.400 MHz : 7.324 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: $\leq 8.0$ dBm Margin: -0.7 dB


[back to matrix](#)



# POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5270.00 MHz, Chain a, Temp: 20, Voltage: Vdc

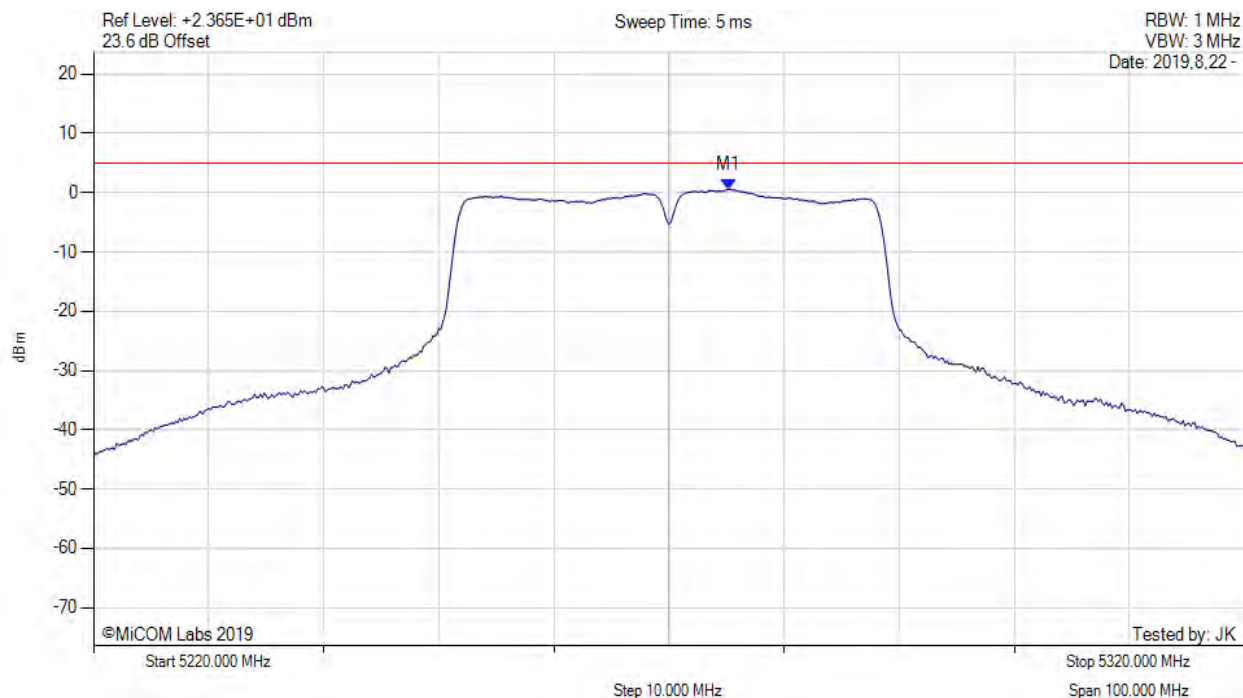


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5275.170 MHz : 0.535 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5270.00 MHz, Chain b, Temp: 20, Voltage: Vdc

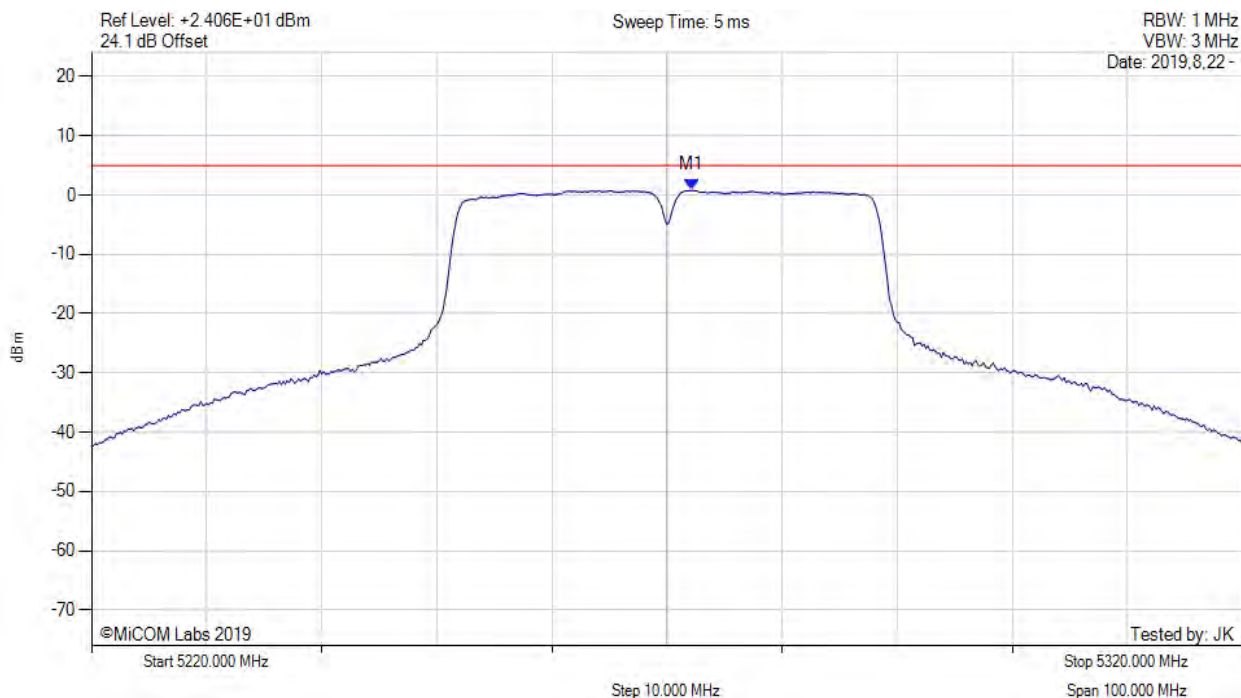


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5272.170 MHz : 0.804 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5270.00 MHz, SUM, Temp: 20, Voltage: Vdc

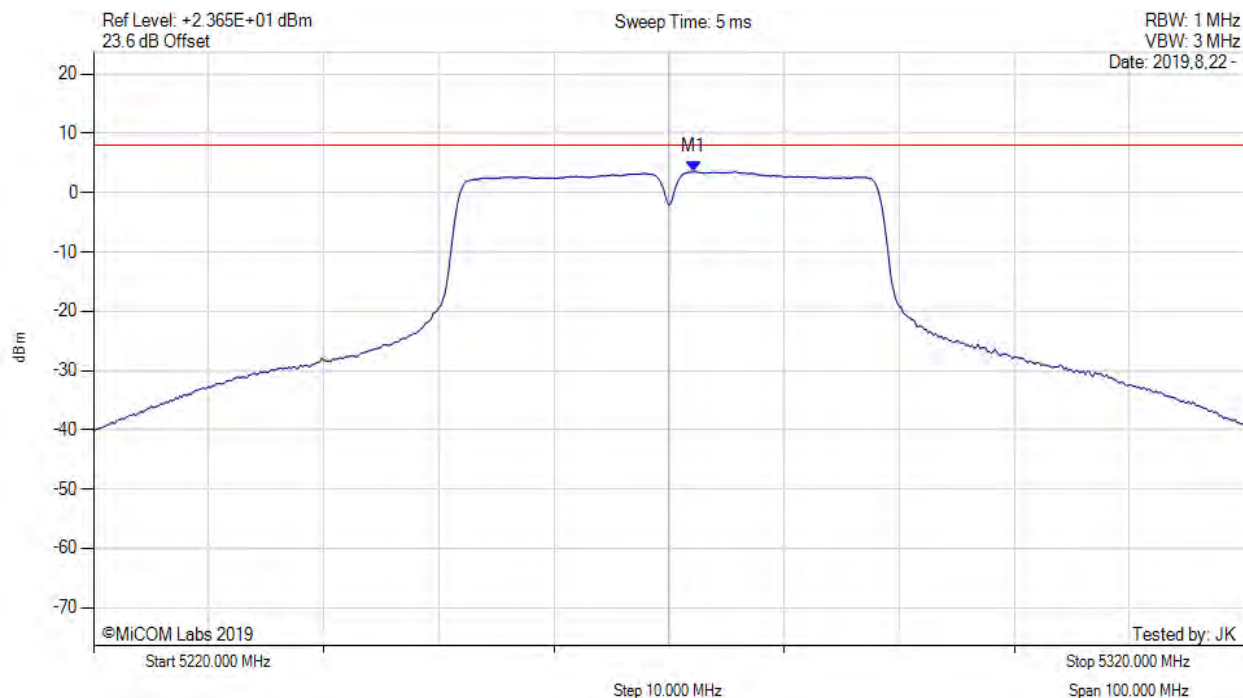


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5272.200 MHz : 3.532 dBm M1 + DCCF : 5272.200 MHz : 3.620 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: ≤ 8.0 dBm Margin: -4.4 dB

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5310.00 MHz, Chain a, Temp: 20, Voltage: Vdc

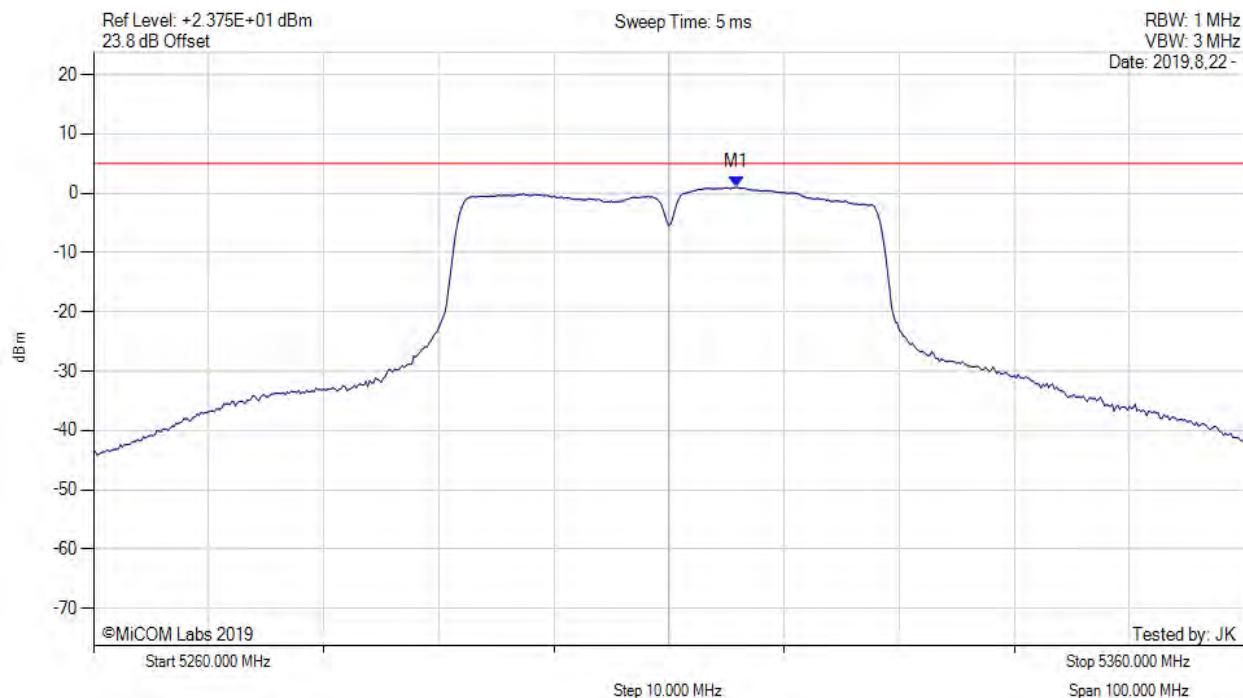


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5315.830 MHz : 0.981 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5310.00 MHz, Chain b, Temp: 20, Voltage: Vdc

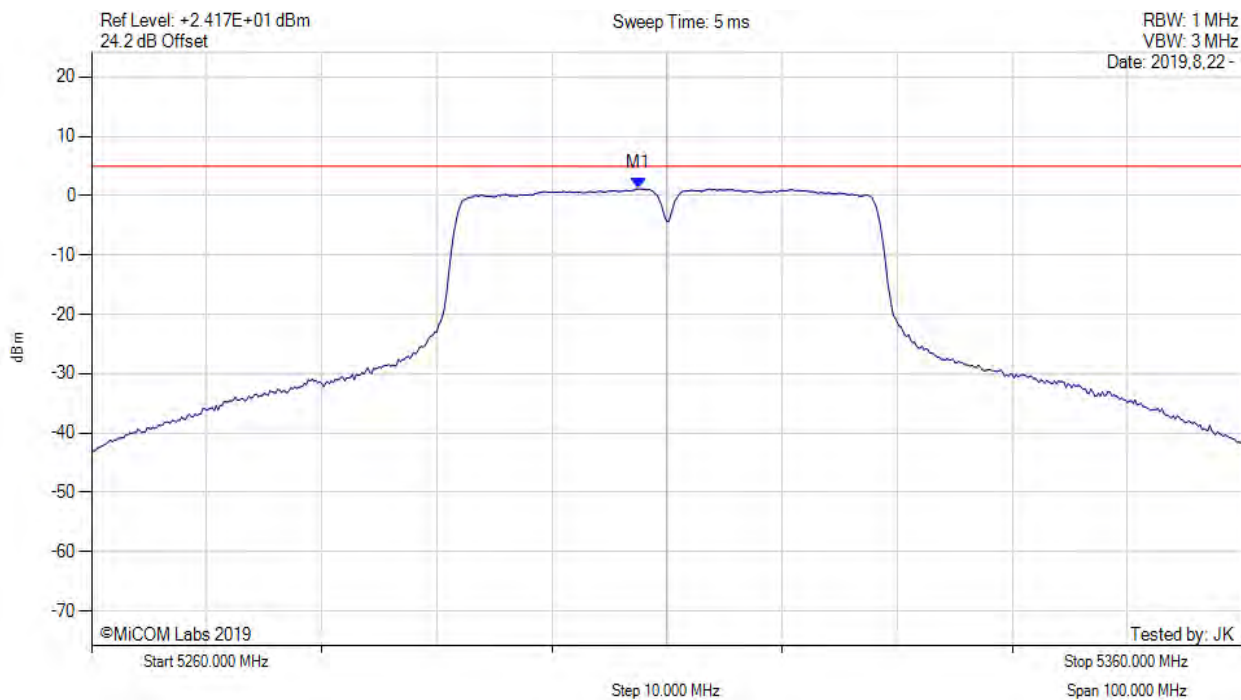

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5307.500 MHz : 1.189 dBm	Limit: ≤ 4.990 dBm


[back to matrix](#)



# POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5310.00 MHz, SUM, Temp: 20, Voltage: Vdc

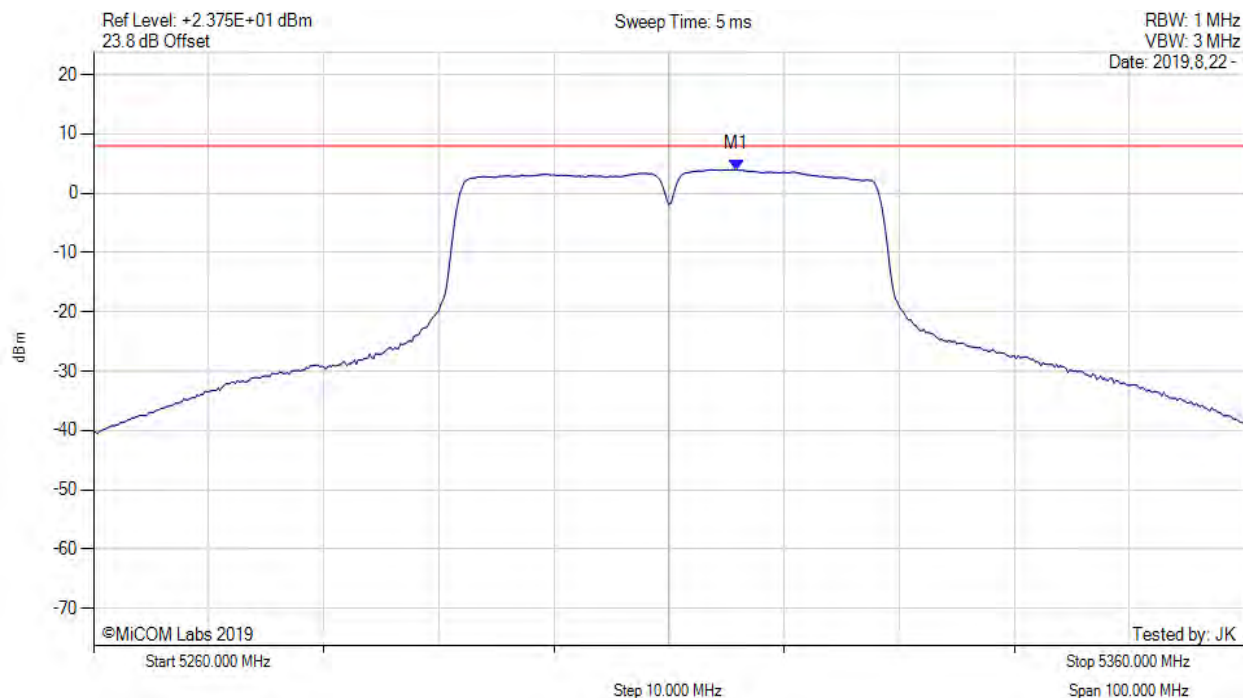


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5315.800 MHz : 3.979 dBm M1 + DCCF : 5315.800 MHz : 4.067 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: $\leq 8.0$ dBm Margin: -3.9 dB

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5500.00 MHz, Chain a, Temp: 20, Voltage: Vdc

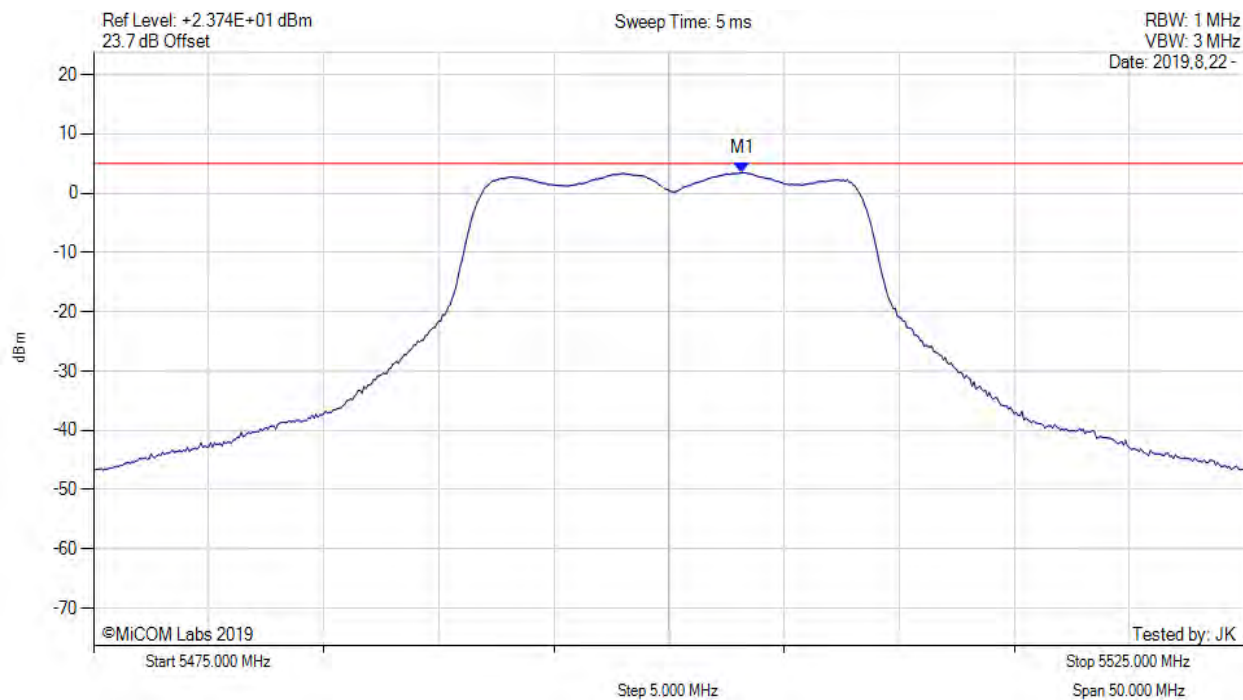


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5503.170 MHz : 3.465 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5500.00 MHz, Chain b, Temp: 20, Voltage: Vdc

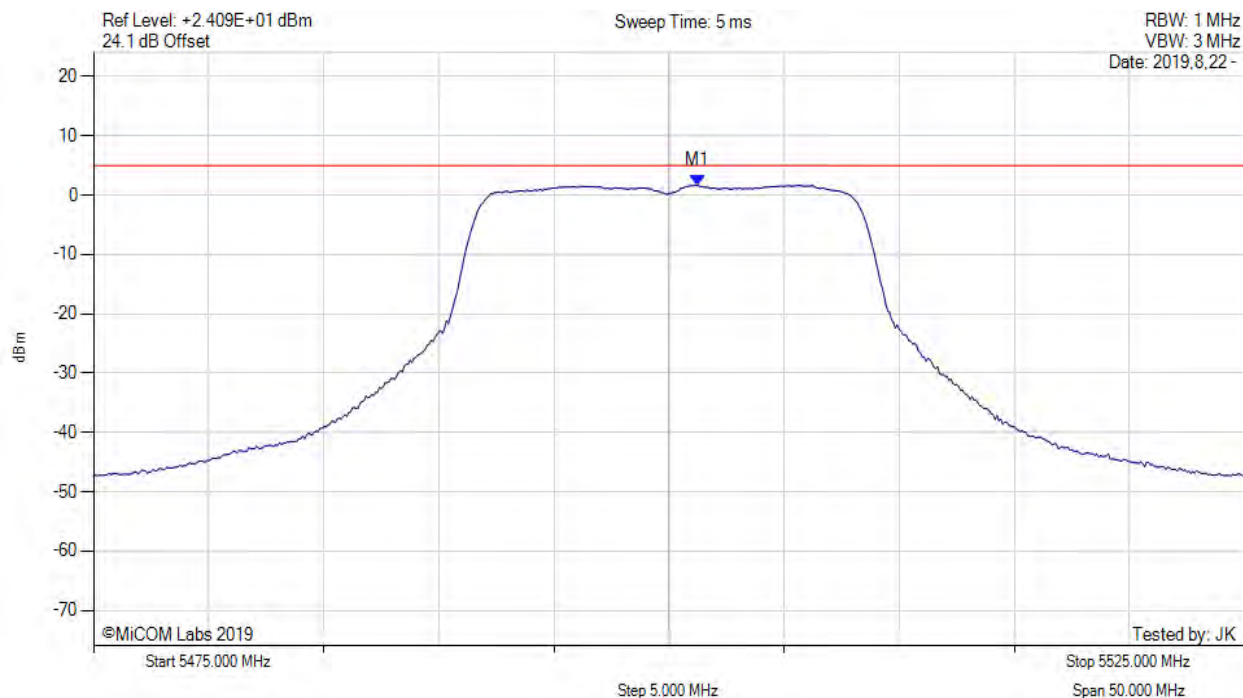


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5501.250 MHz : 1.703 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5500.00 MHz, SUM, Temp: 20, Voltage: Vdc

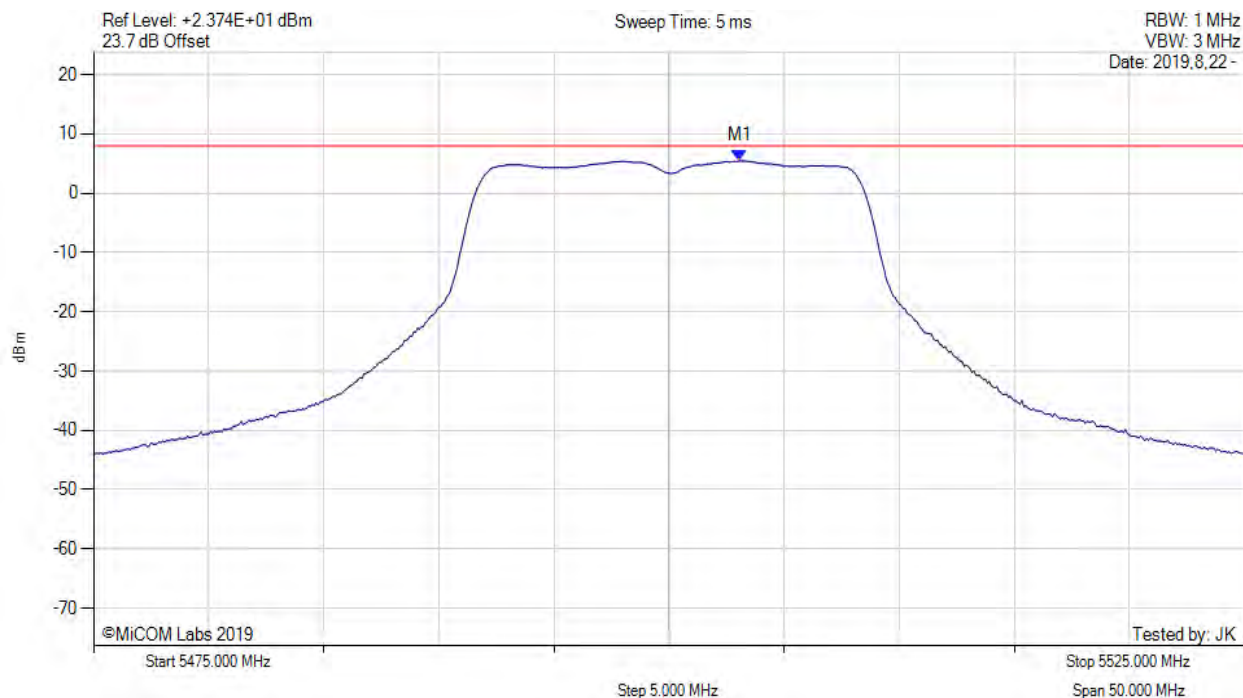


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5503.100 MHz : 5.452 dBm M1 + DCCF : 5503.100 MHz : 5.540 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: ≤ 8.0 dBm Margin: -2.5 dB

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5580.00 MHz, Chain a, Temp: 20, Voltage: Vdc

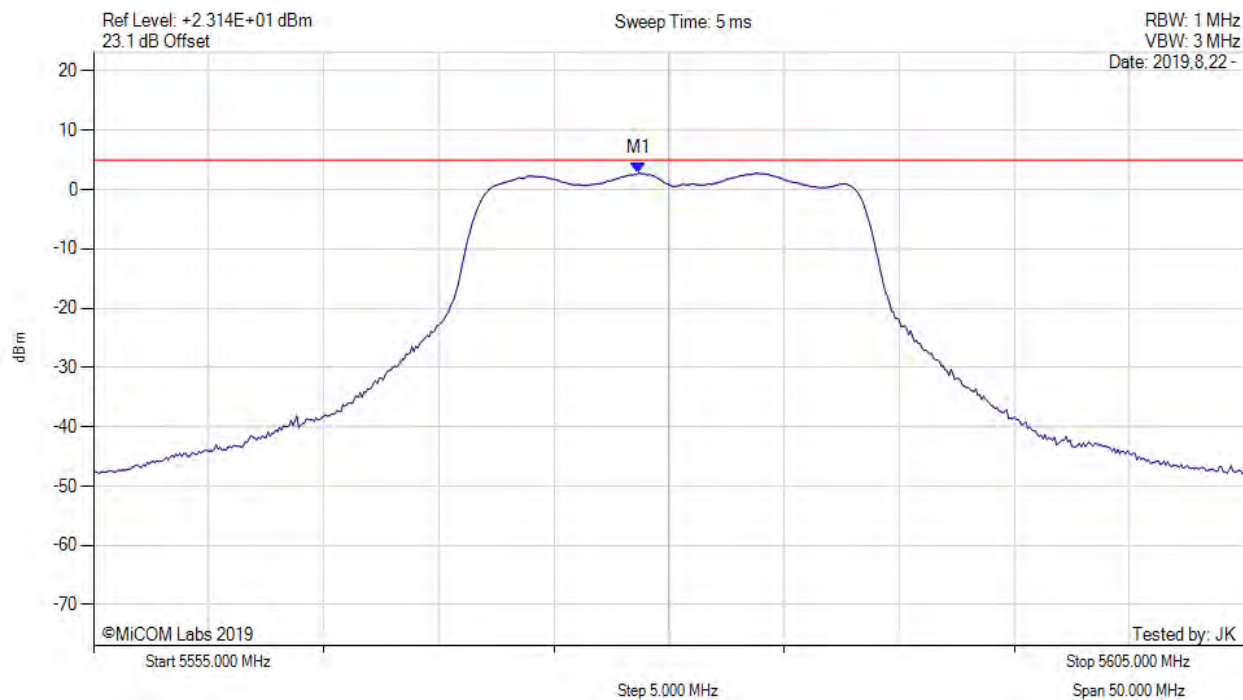

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5578.670 MHz : 2.794 dBm	Limit: ≤ 4.990 dBm


[back to matrix](#)



# POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5580.00 MHz, Chain b, Temp: 20, Voltage: Vdc

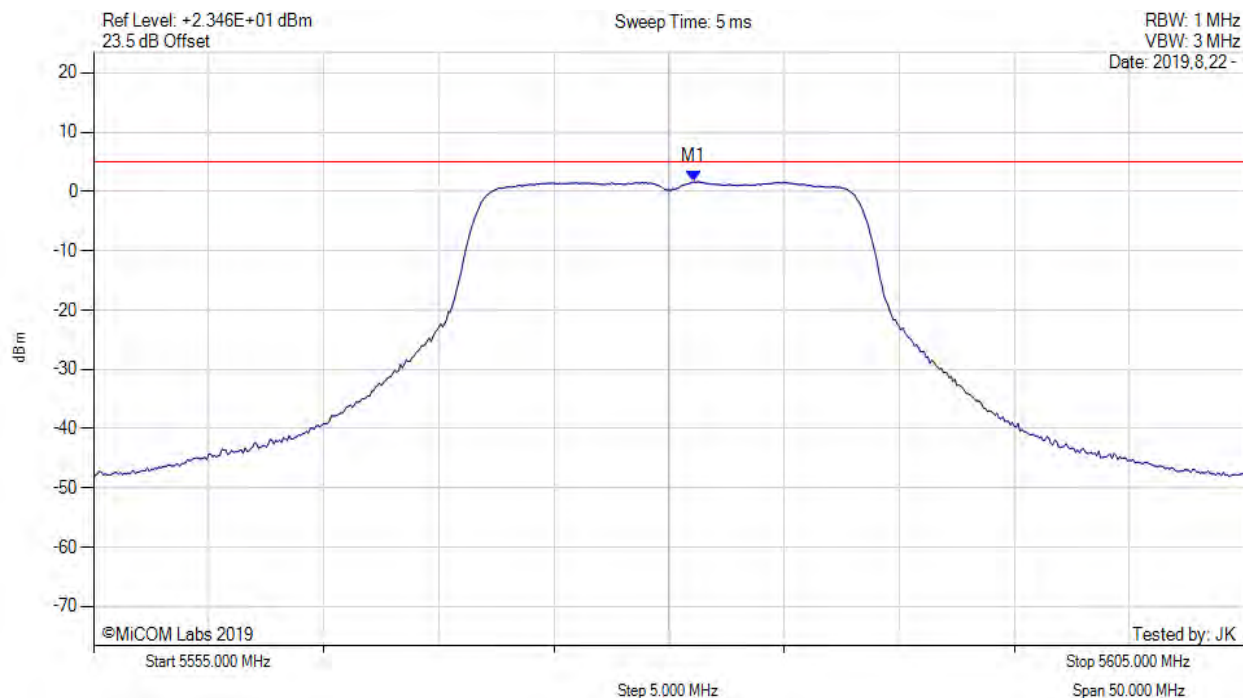


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5581.080 MHz : 1.629 dBm	Channel Frequency: 5580.00 MHz

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5580.00 MHz, SUM, Temp: 20, Voltage: Vdc

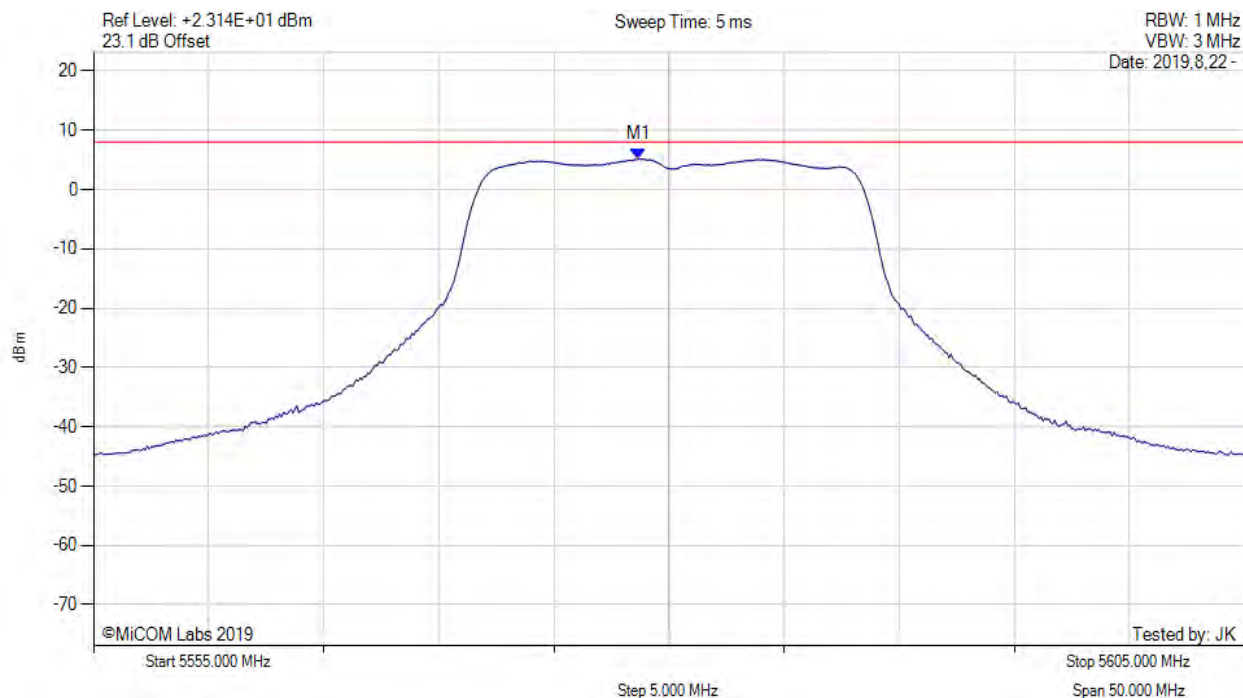


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5578.700 MHz : 5.176 dBm M1 + DCCF : 5578.700 MHz : 5.264 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: $\leq 8.0$ dBm Margin: -2.7 dB

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5720.00 MHz, Chain a, Temp: 20, Voltage: Vdc

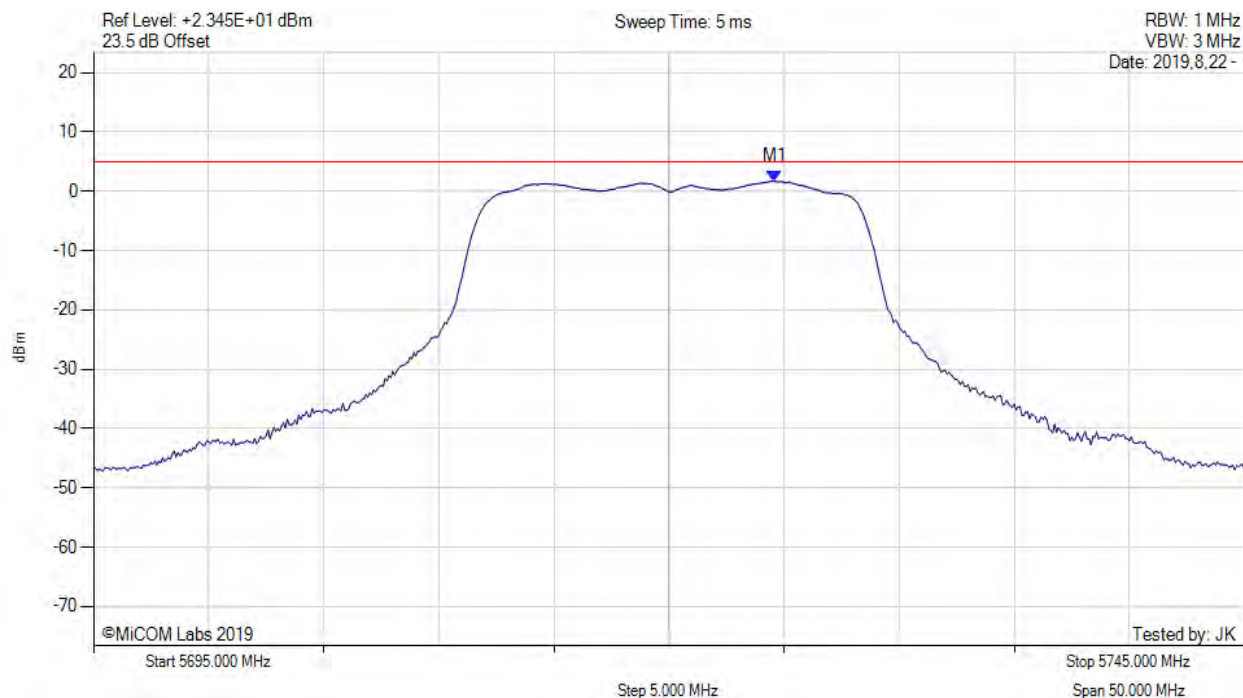


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5724.580 MHz : 1.724 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5720.00 MHz, Chain b, Temp: 20, Voltage: Vdc

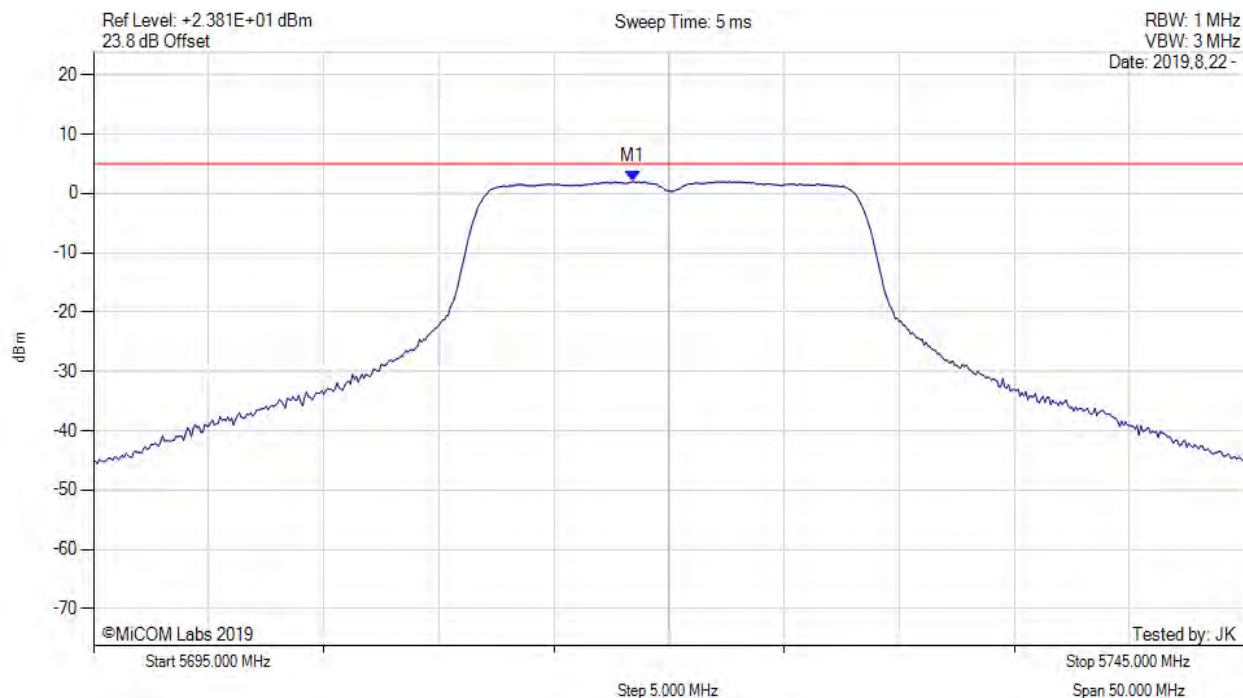


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5718.420 MHz : 2.055 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5720.00 MHz, SUM, Temp: 20, Voltage: Vdc

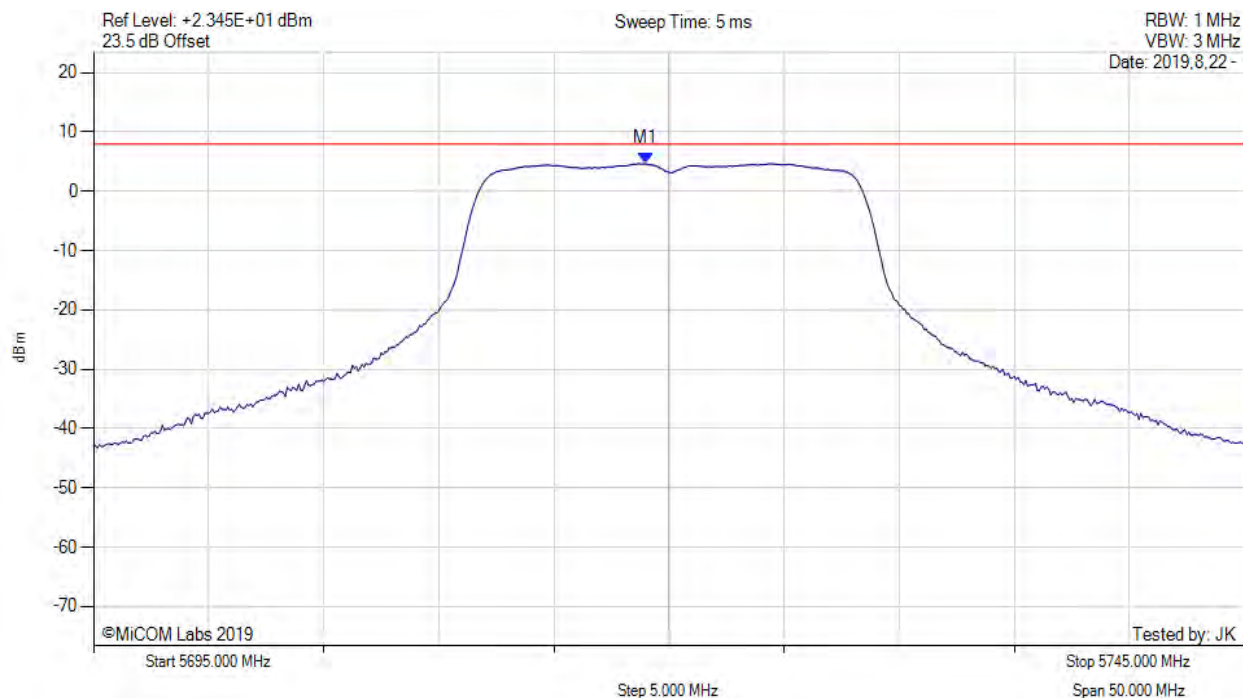

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5719.000 MHz : 4.671 dBm M1 + DCCF : 5719.000 MHz : 4.759 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: $\leq 8.0$ dBm Margin: -3.3 dB


[back to matrix](#)



# POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5530.00 MHz, Chain a, Temp: 20, Voltage: Vdc

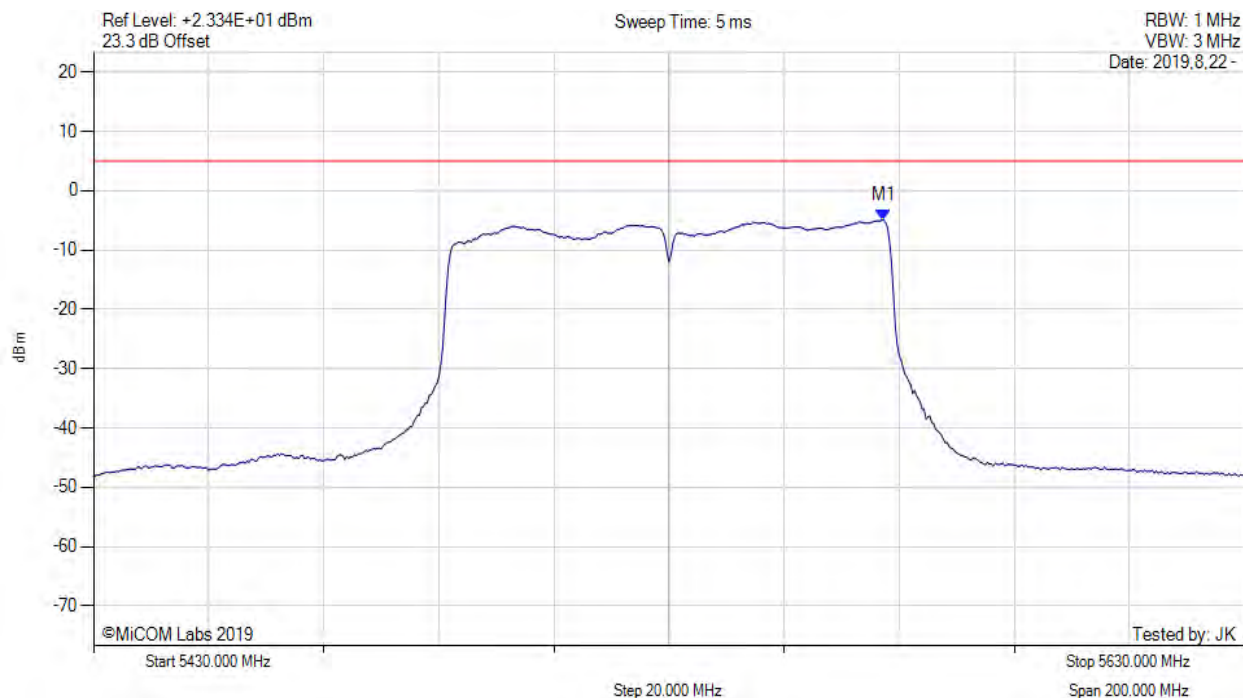


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5567.300 MHz : -4.930 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5530.00 MHz, Chain b, Temp: 20, Voltage: Vdc

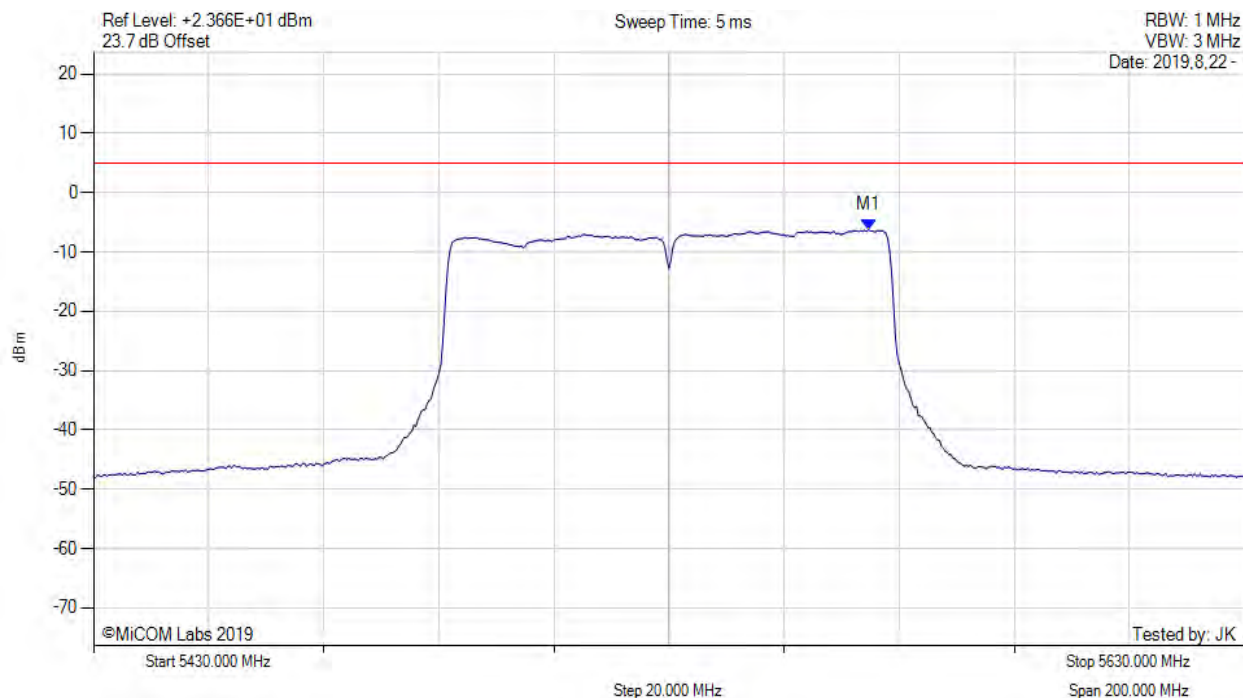


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5564.700 MHz : -6.266 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5530.00 MHz, SUM, Temp: 20, Voltage: Vdc

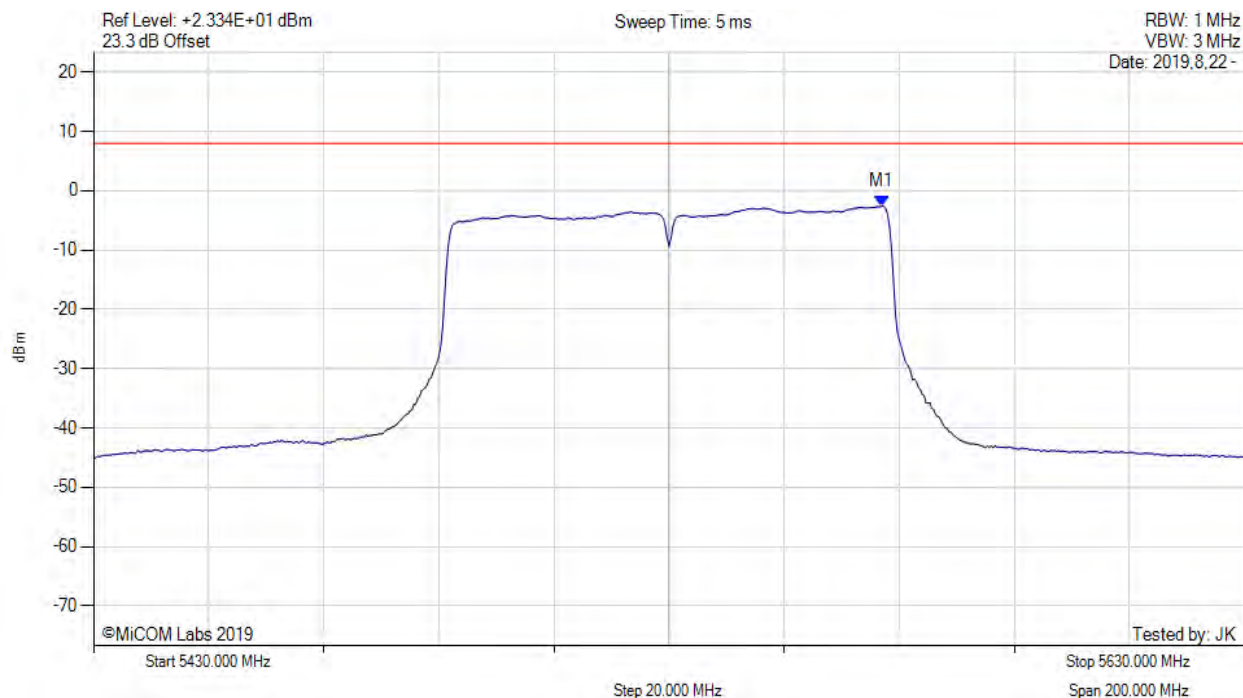


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5567.000 MHz : -2.600 dBm M1 + DCCF : 5567.000 MHz : -2.512 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: ≤ 8.0 dBm Margin: -10.5 dB

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5610.00 MHz, Chain a, Temp: 20, Voltage: Vdc

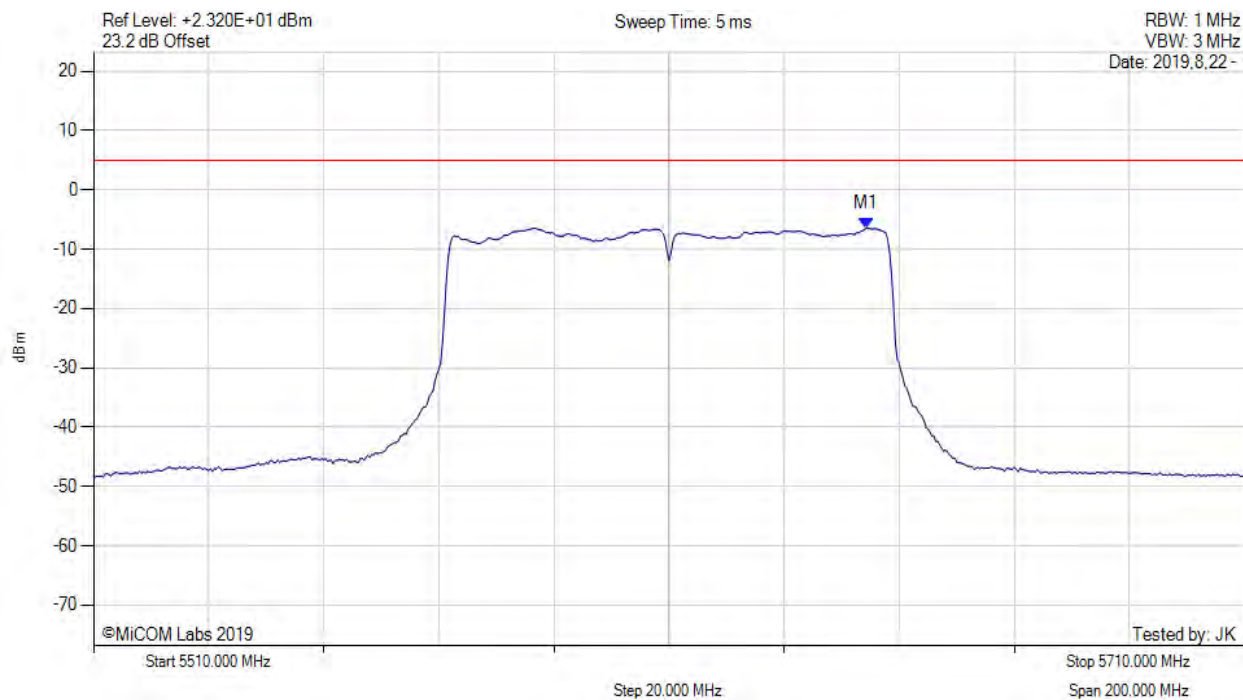


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5644.300 MHz : -6.407 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5610.00 MHz, Chain b, Temp: 20, Voltage: Vdc

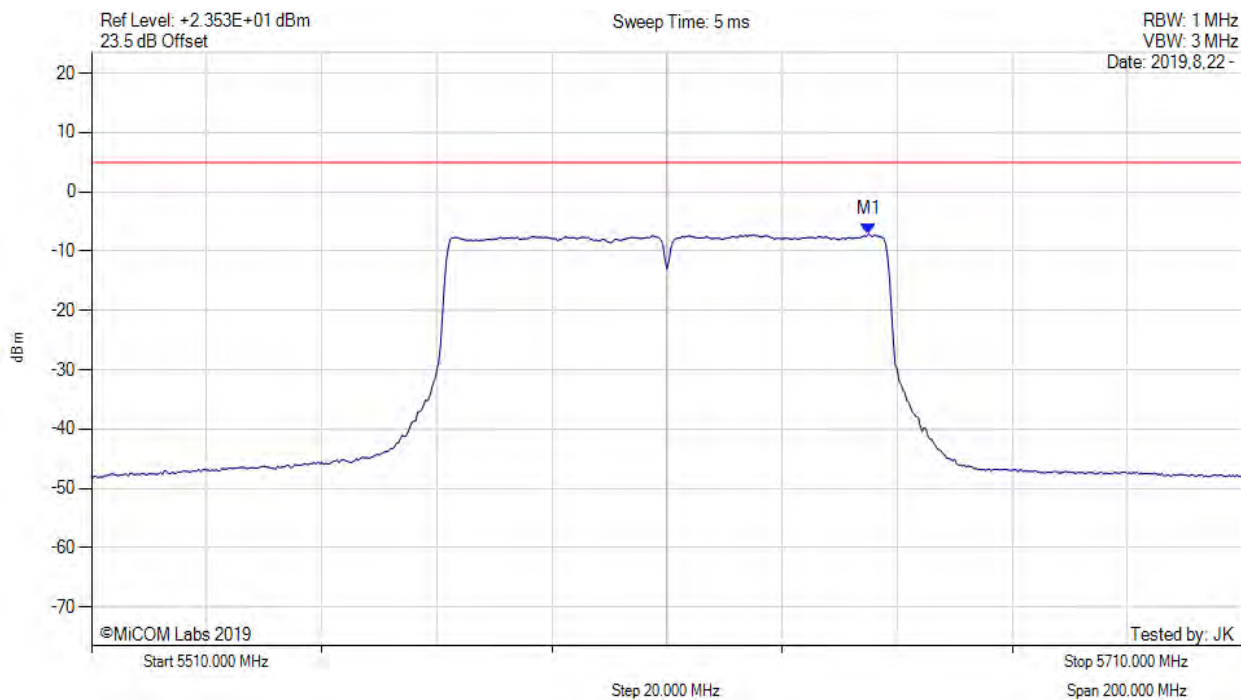

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5645.000 MHz : -7.104 dBm	Channel Frequency: 5610.00 MHz


[back to matrix](#)



# POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5610.00 MHz, SUM, Temp: 20, Voltage: Vdc

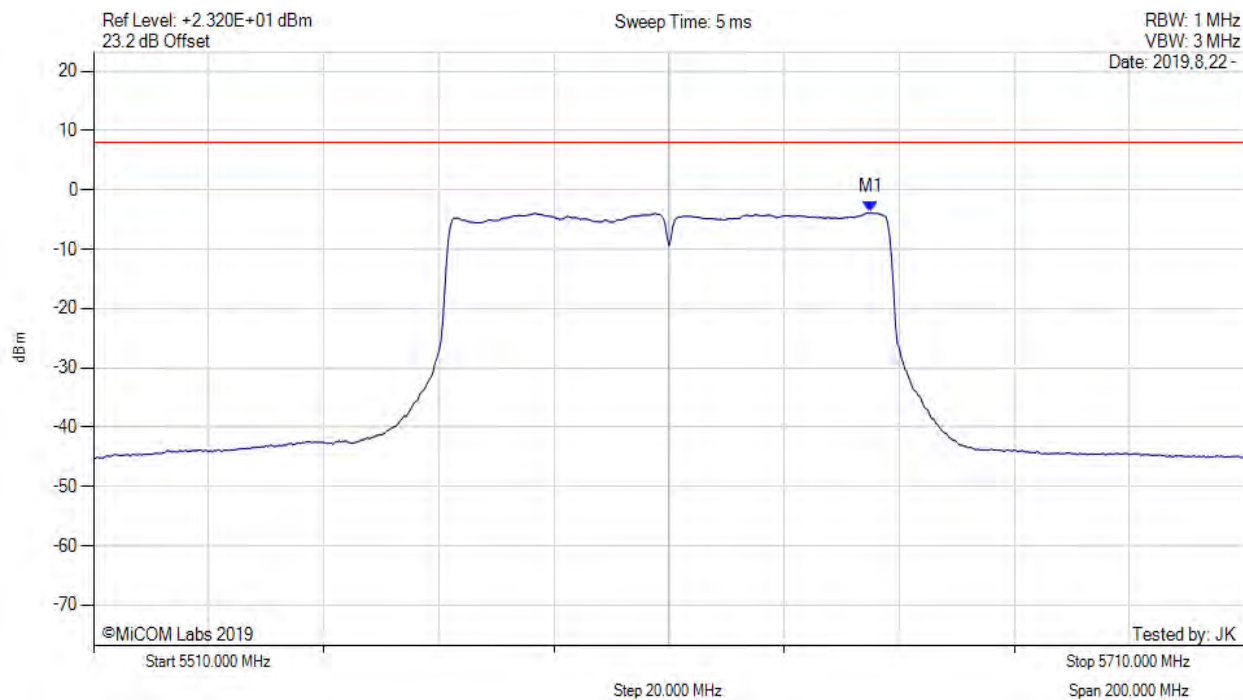


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5645.000 MHz : -3.805 dBm M1 + DCCF : 5645.000 MHz : -3.717 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: $\leq 8.0$ dBm Margin: -11.7 dB

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5690.00 MHz, Chain a, Temp: 20, Voltage: Vdc

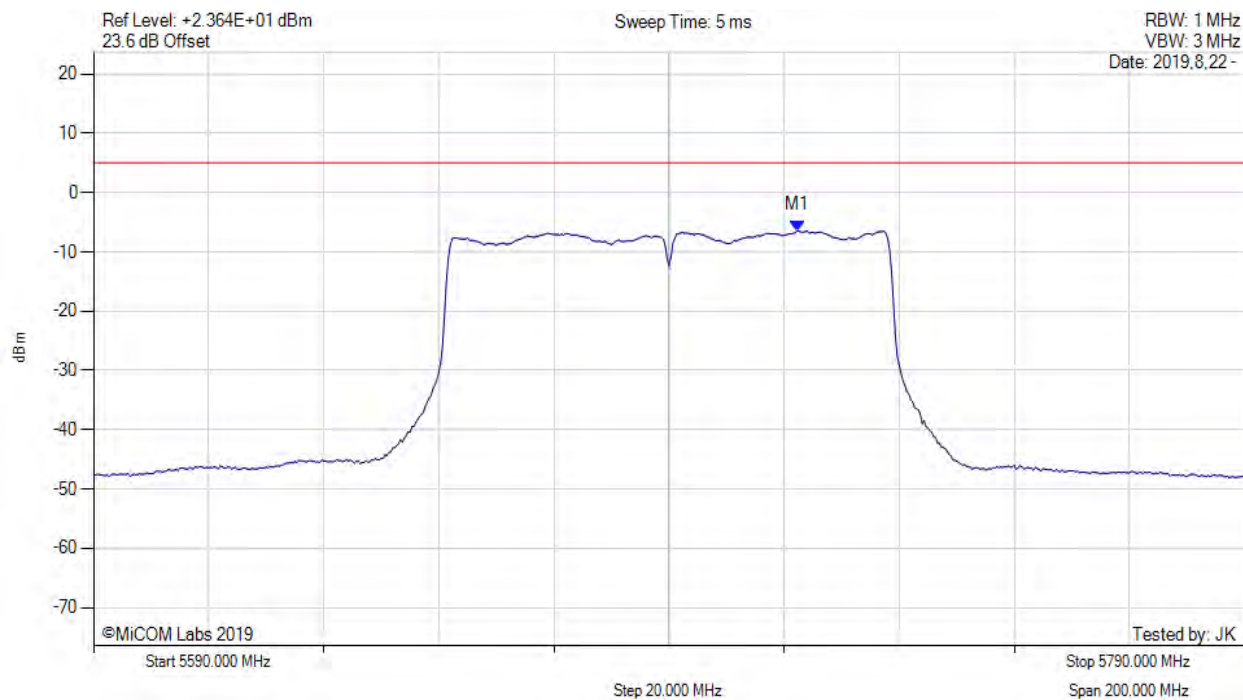


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5712.300 MHz : -6.425 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5690.00 MHz, Chain b, Temp: 20, Voltage: Vdc

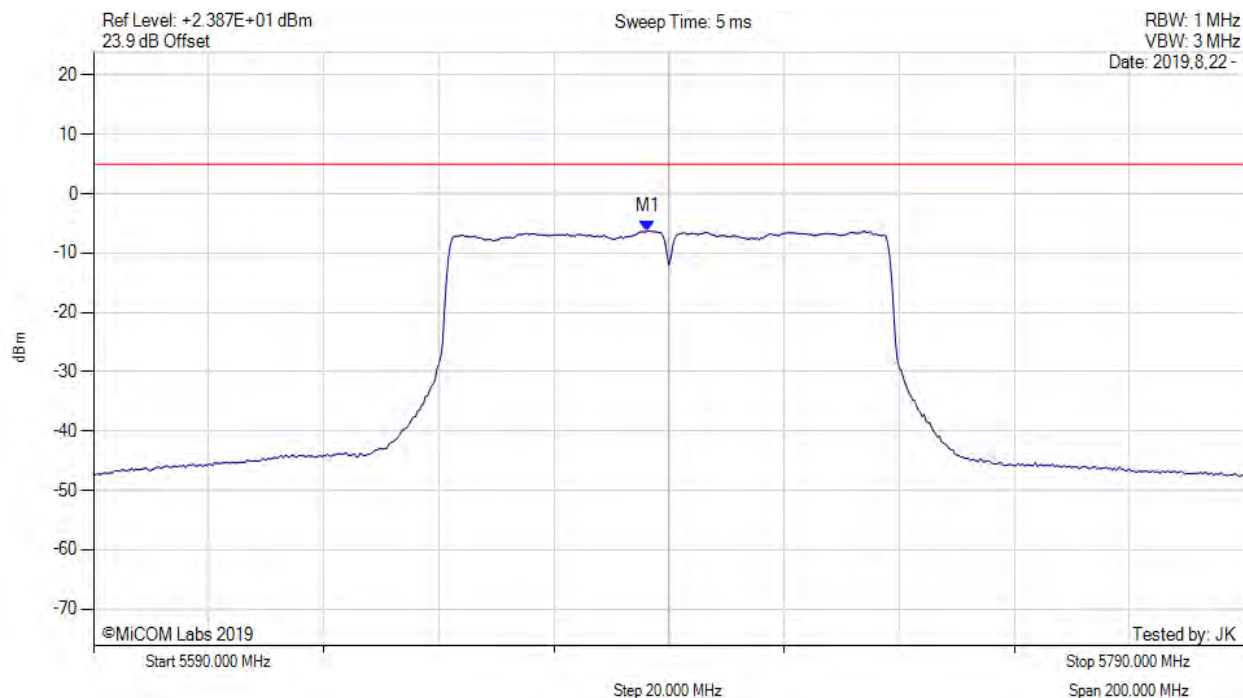


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5686.300 MHz : -6.205 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5690.00 MHz, SUM, Temp: 20, Voltage: Vdc

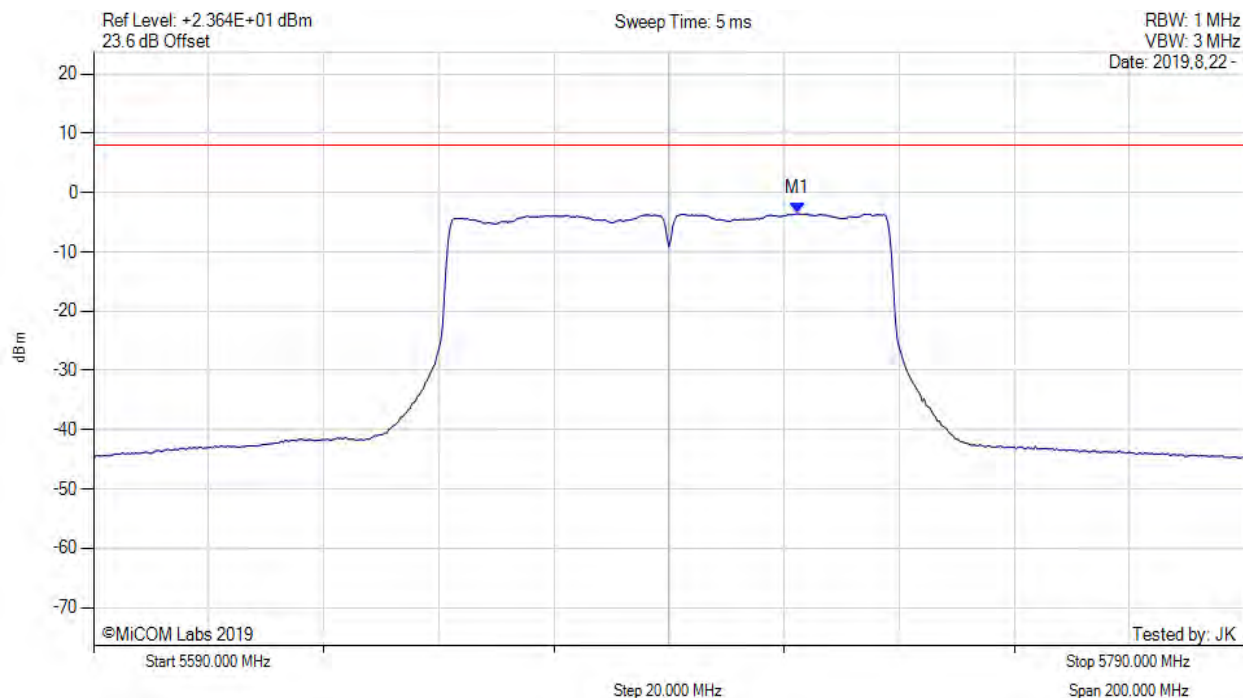


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5712.300 MHz : -3.562 dBm M1 + DCCF : 5712.300 MHz : -3.474 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: ≤ 8.0 dBm Margin: -11.5 dB

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5500.00 MHz, Chain a, Temp: 20, Voltage: Vdc

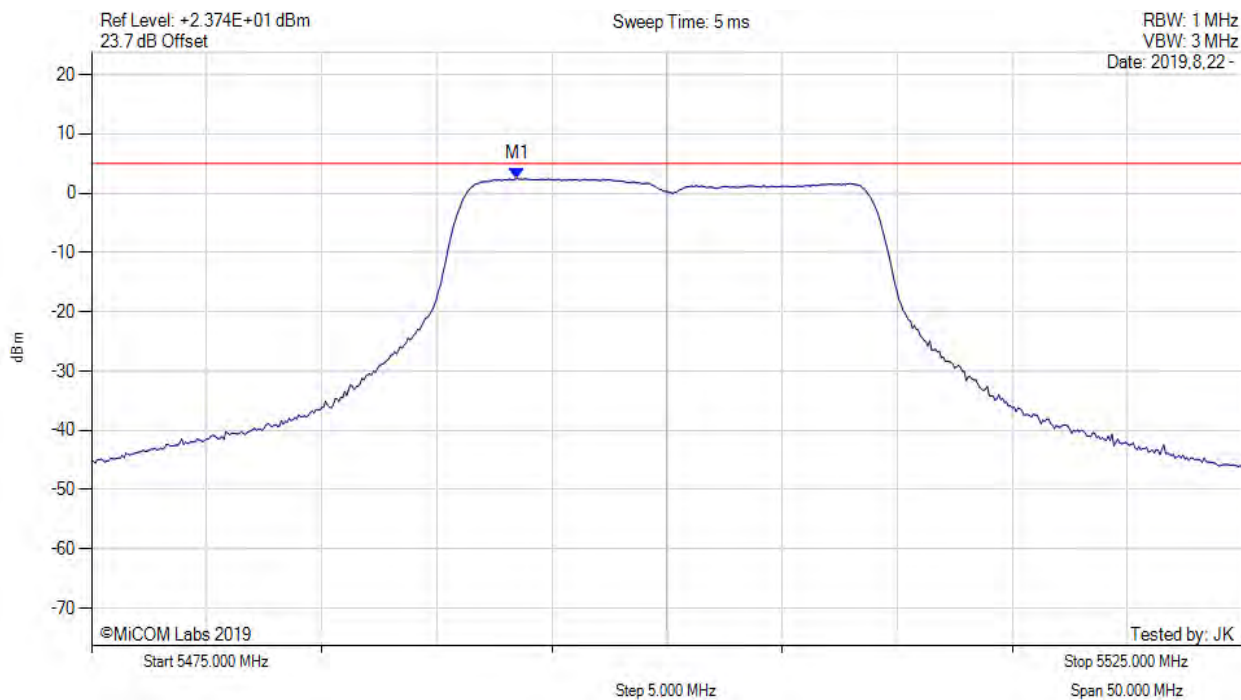

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5493.500 MHz : 2.446 dBm	Limit: ≤ 4.990 dBm


[back to matrix](#)



# POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5500.00 MHz, Chain b, Temp: 20, Voltage: Vdc

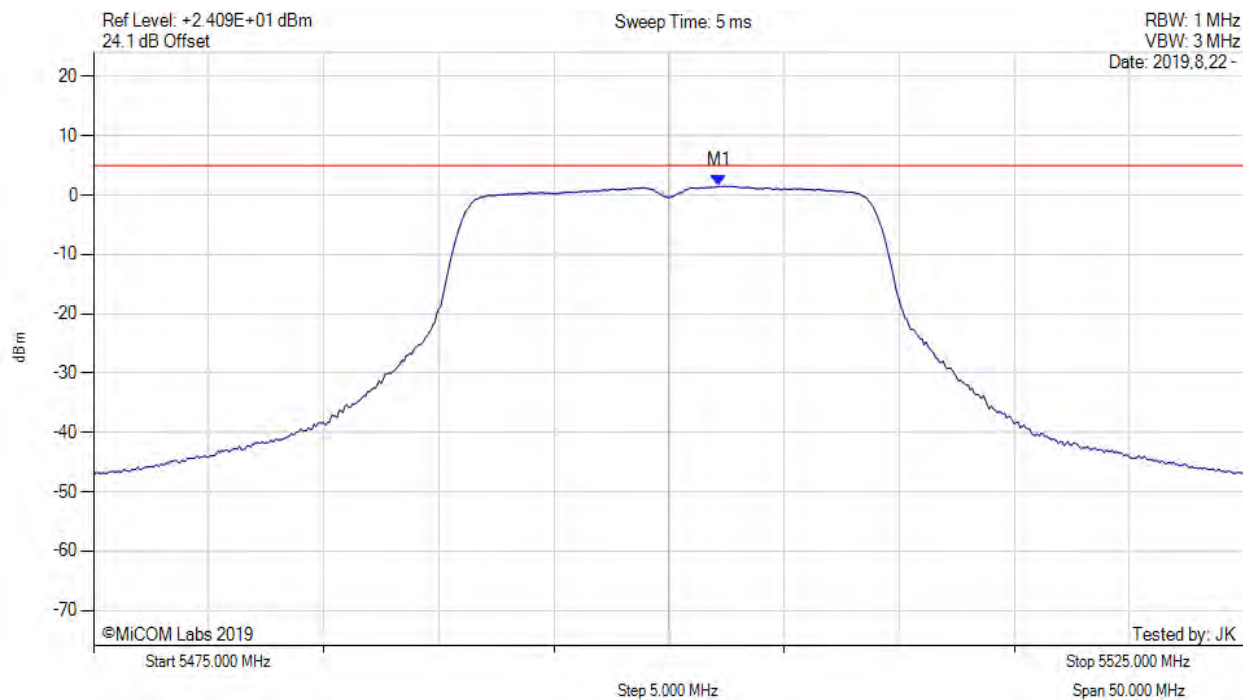


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5502.170 MHz : 1.547 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5500.00 MHz, SUM, Temp: 20, Voltage: Vdc

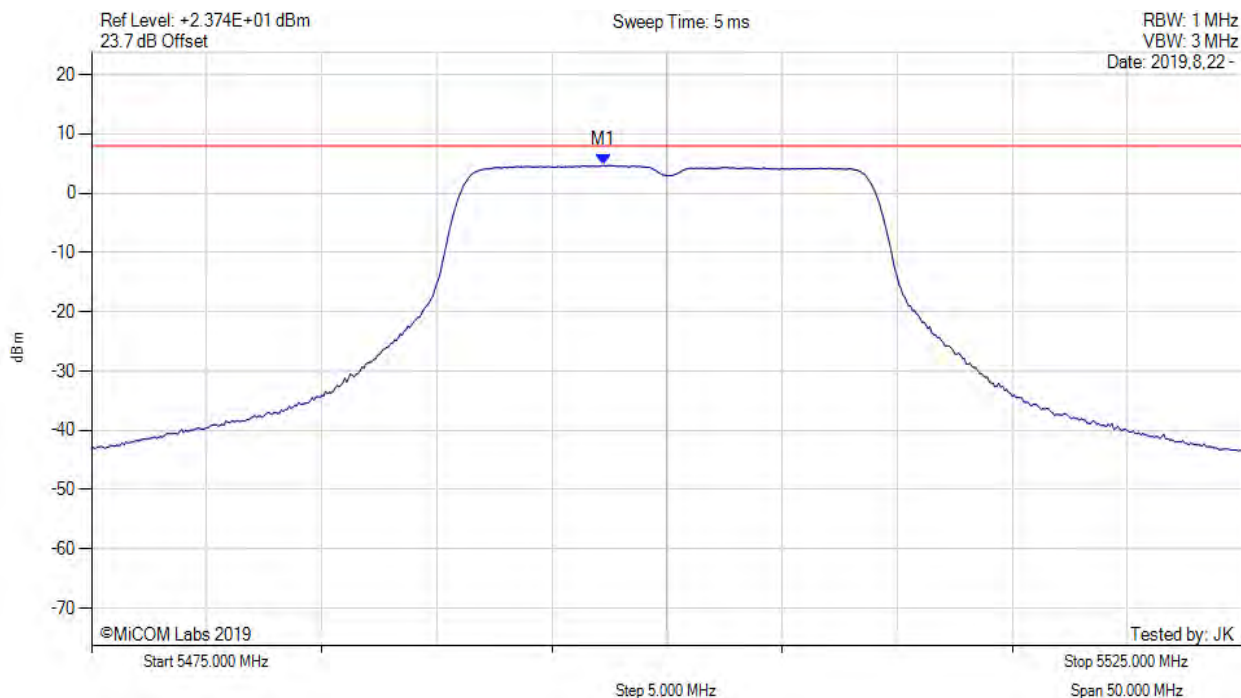


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5497.300 MHz : 4.709 dBm M1 + DCCF : 5497.300 MHz : 4.797 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: $\leq 8.0$ dBm Margin: -3.2 dB

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5580.00 MHz, Chain a, Temp: 20, Voltage: Vdc

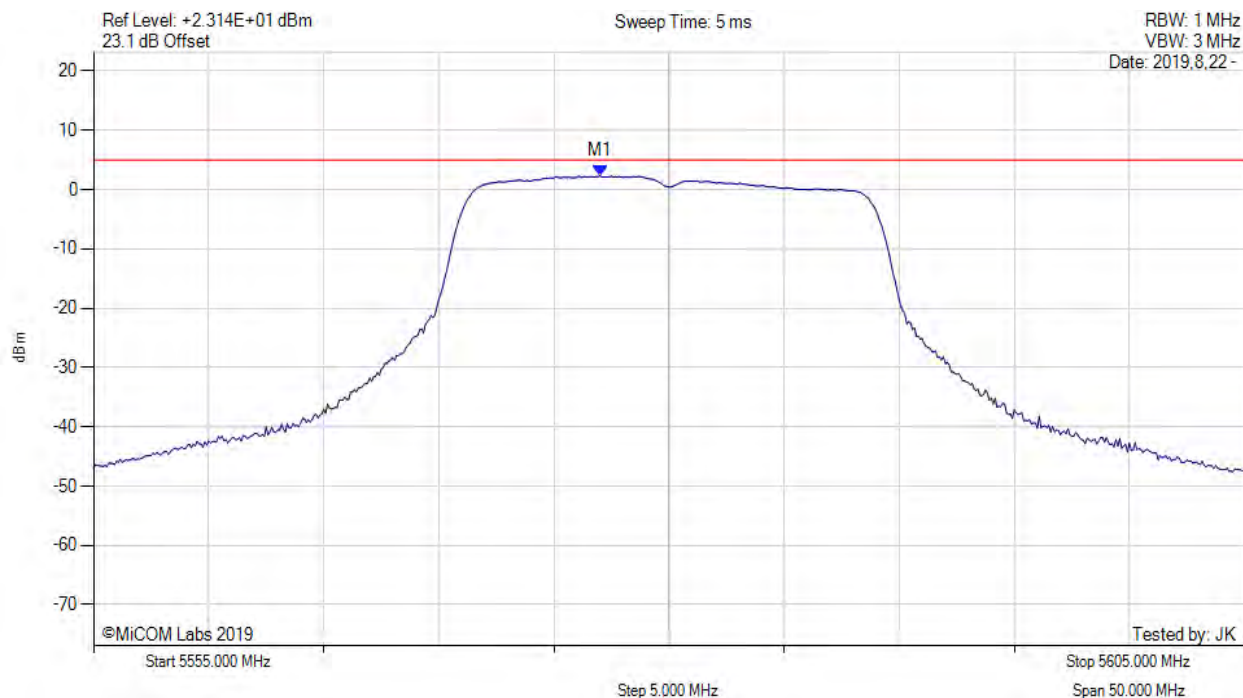


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5577.000 MHz : 2.321 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5580.00 MHz, Chain b, Temp: 20, Voltage: Vdc

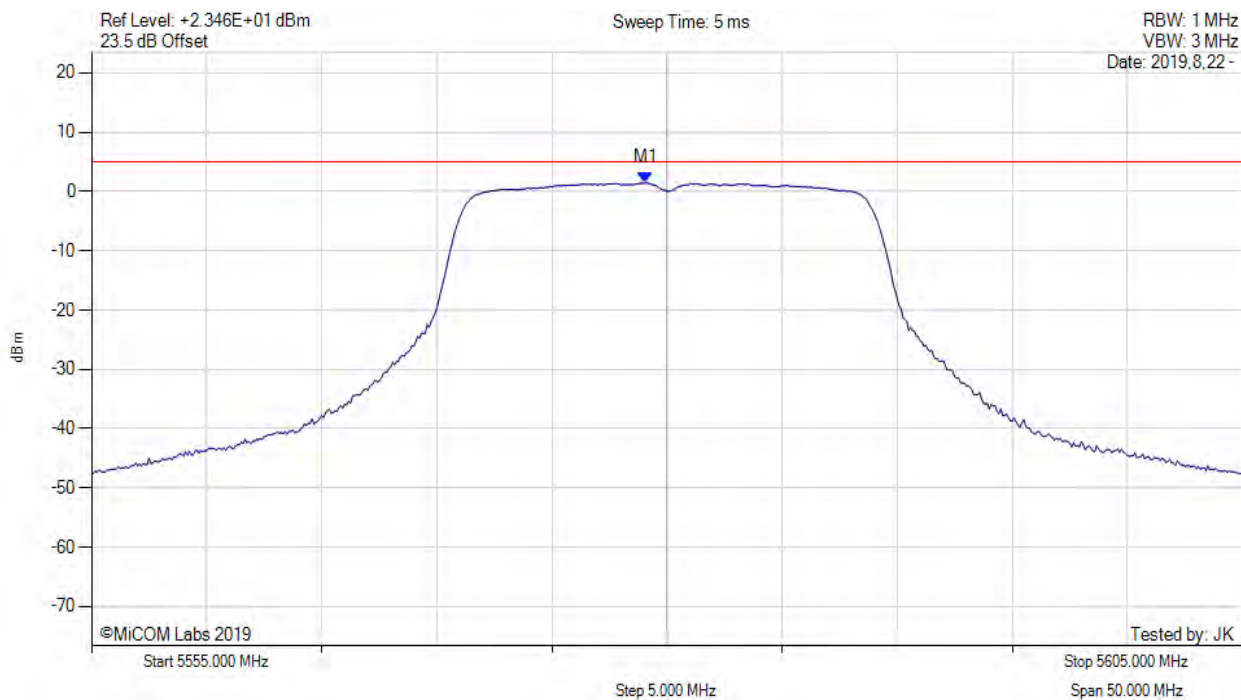


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5579.080 MHz : 1.473 dBm	Channel Frequency: 5580.00 MHz

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5580.00 MHz, SUM, Temp: 20, Voltage: Vdc

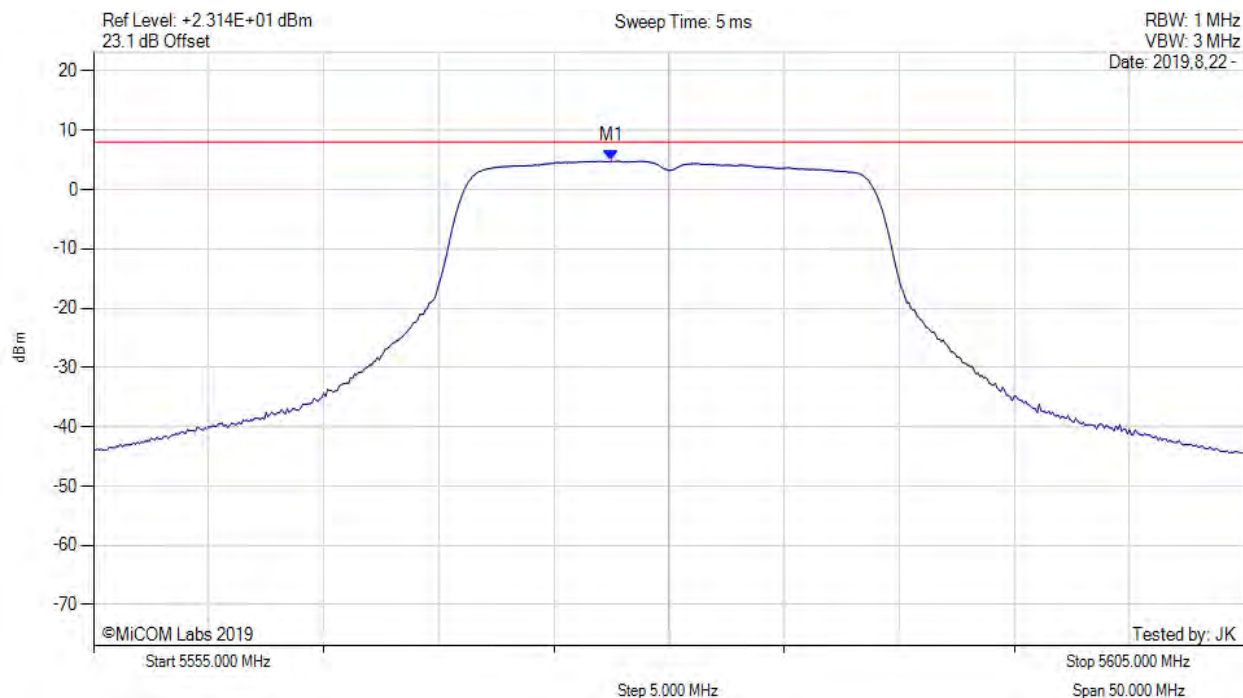

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5577.500 MHz : 4.811 dBm M1 + DCCF : 5577.500 MHz : 4.899 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: ≤ 8.0 dBm Margin: -3.1 dB


[back to matrix](#)



# POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5720.00 MHz, Chain a, Temp: 20, Voltage: Vdc

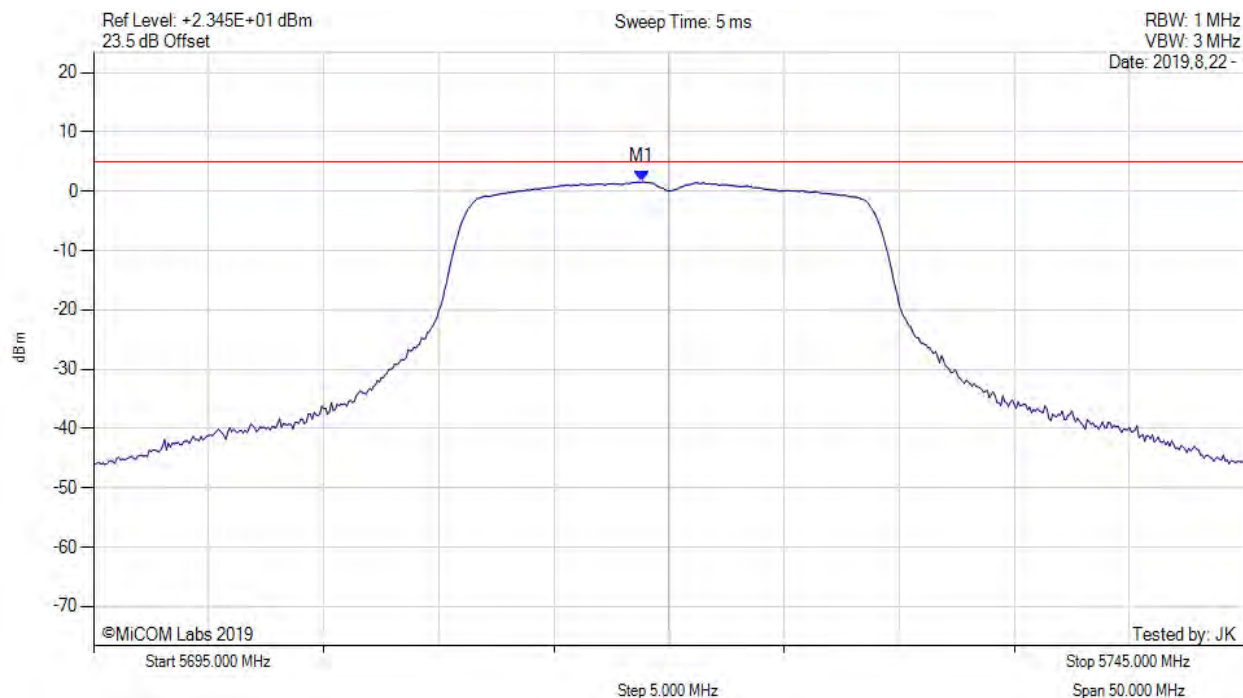


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5718.830 MHz : 1.613 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5720.00 MHz, Chain b, Temp: 20, Voltage: Vdc

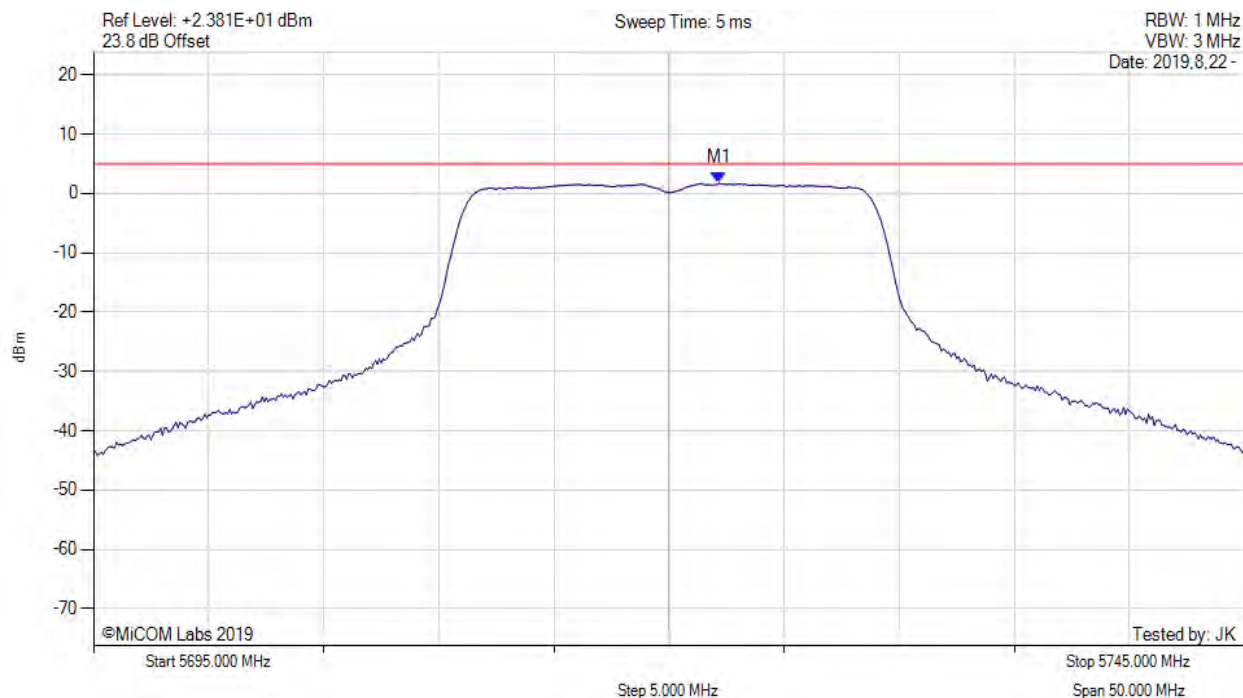


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5722.170 MHz : 1.754 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5720.00 MHz, SUM, Temp: 20, Voltage: Vdc

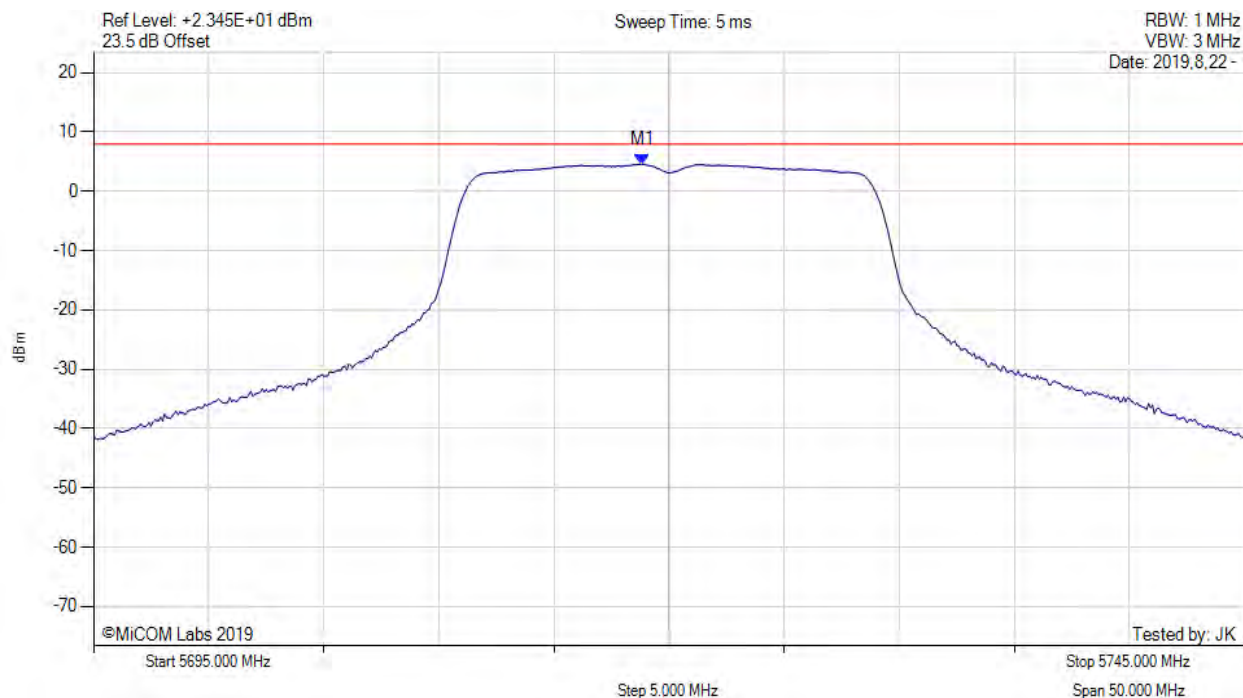


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5718.800 MHz : 4.587 dBm M1 + DCCF : 5718.800 MHz : 4.675 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: $\leq 8.0$ dBm Margin: -3.3 dB

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5510.00 MHz, Chain a, Temp: 20, Voltage: Vdc

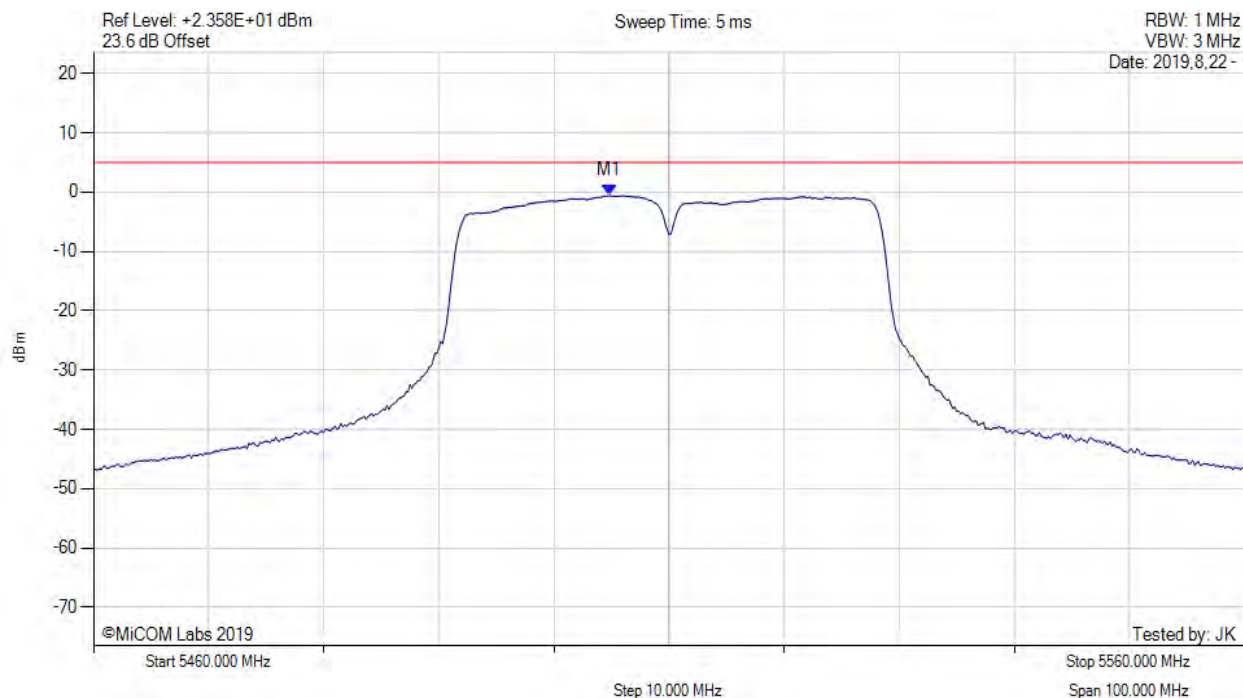


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5504.830 MHz : -0.552 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5510.00 MHz, Chain b, Temp: 20, Voltage: Vdc

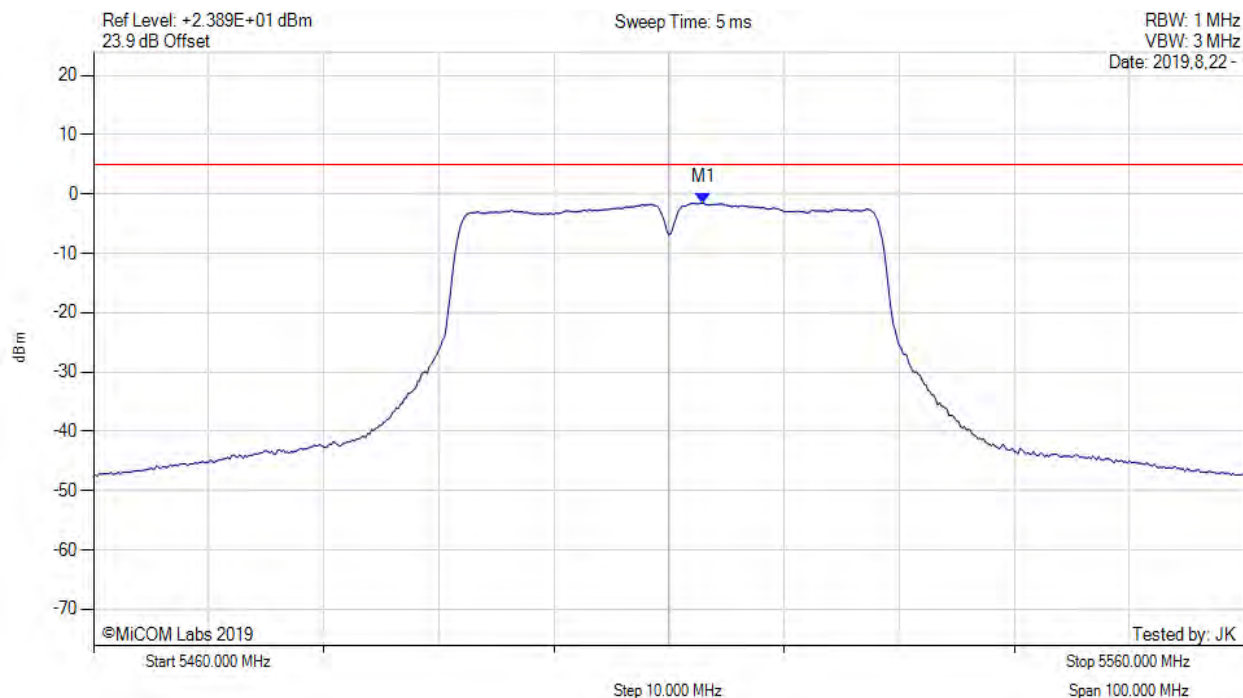

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5513.000 MHz : -1.497 dBm	Limit: ≤ 4.990 dBm


[back to matrix](#)



# POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5510.00 MHz, SUM, Temp: 20, Voltage: Vdc

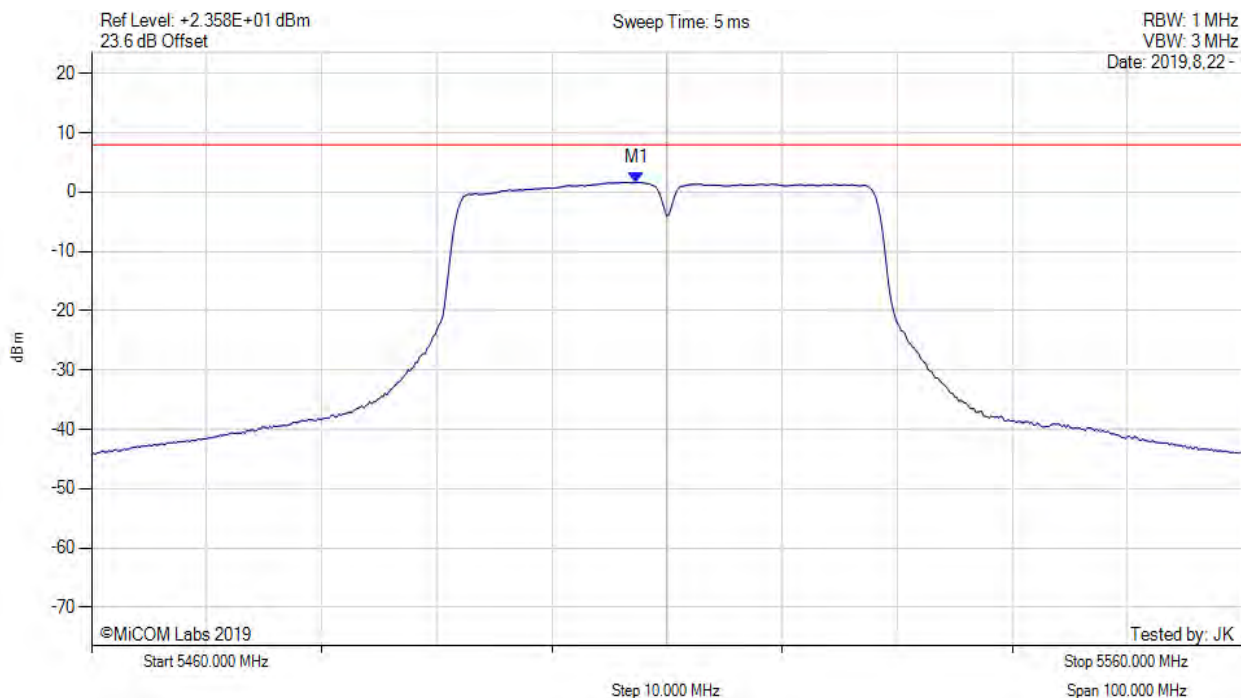


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5507.300 MHz : 1.672 dBm M1 + DCCF : 5507.300 MHz : 1.760 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: $\leq 8.0$ dBm Margin: -6.3 dB

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5550.00 MHz, Chain a, Temp: 20, Voltage: Vdc

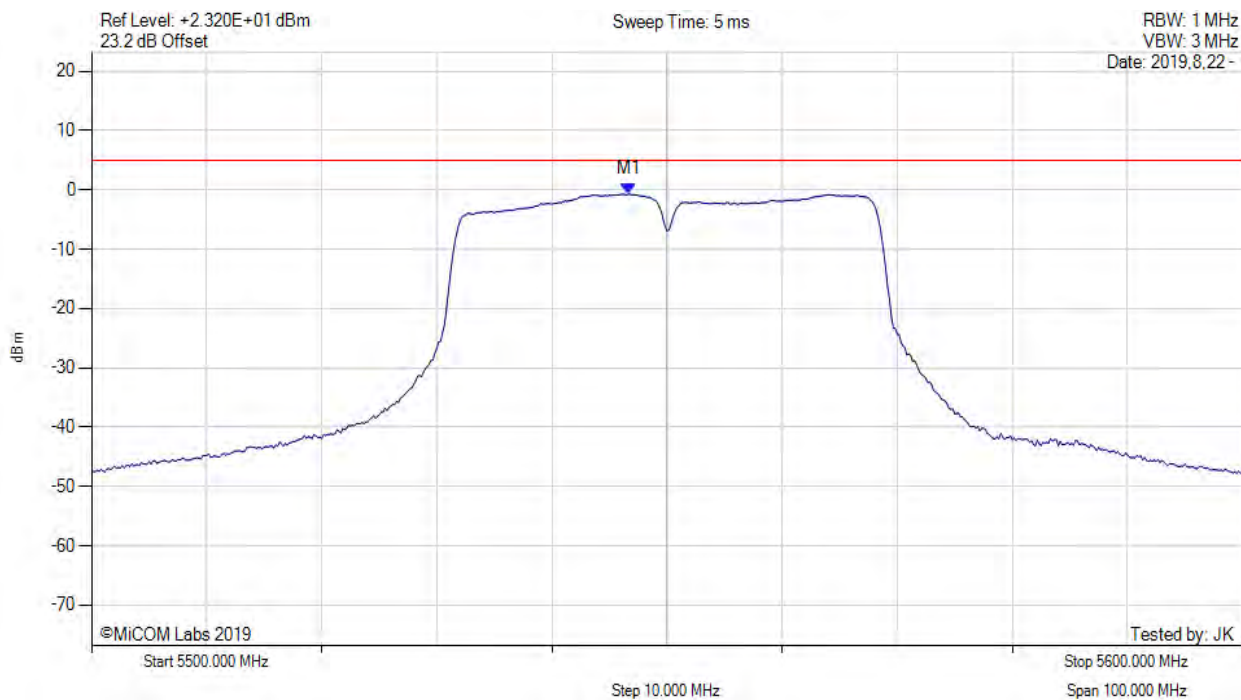


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5546.670 MHz : -0.678 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5550.00 MHz, Chain b, Temp: 20, Voltage: Vdc

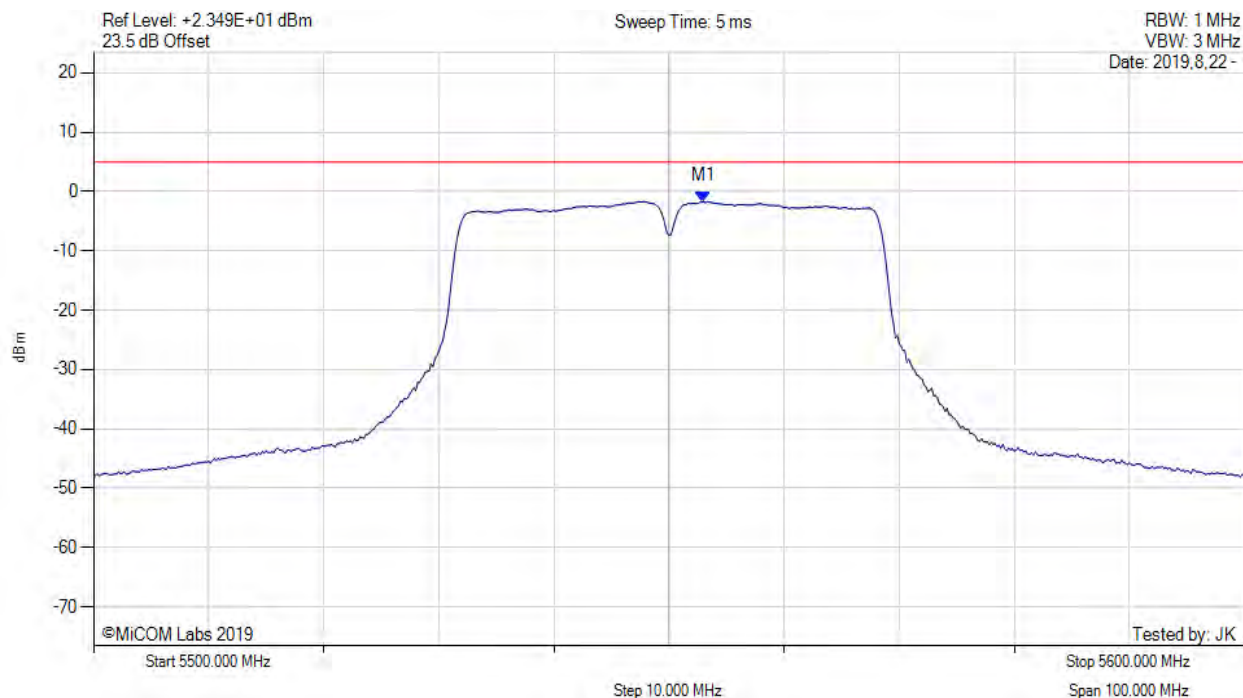


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5553.000 MHz : -1.674 dBm	Channel Frequency: 5550.00 MHz

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5550.00 MHz, SUM, Temp: 20, Voltage: Vdc

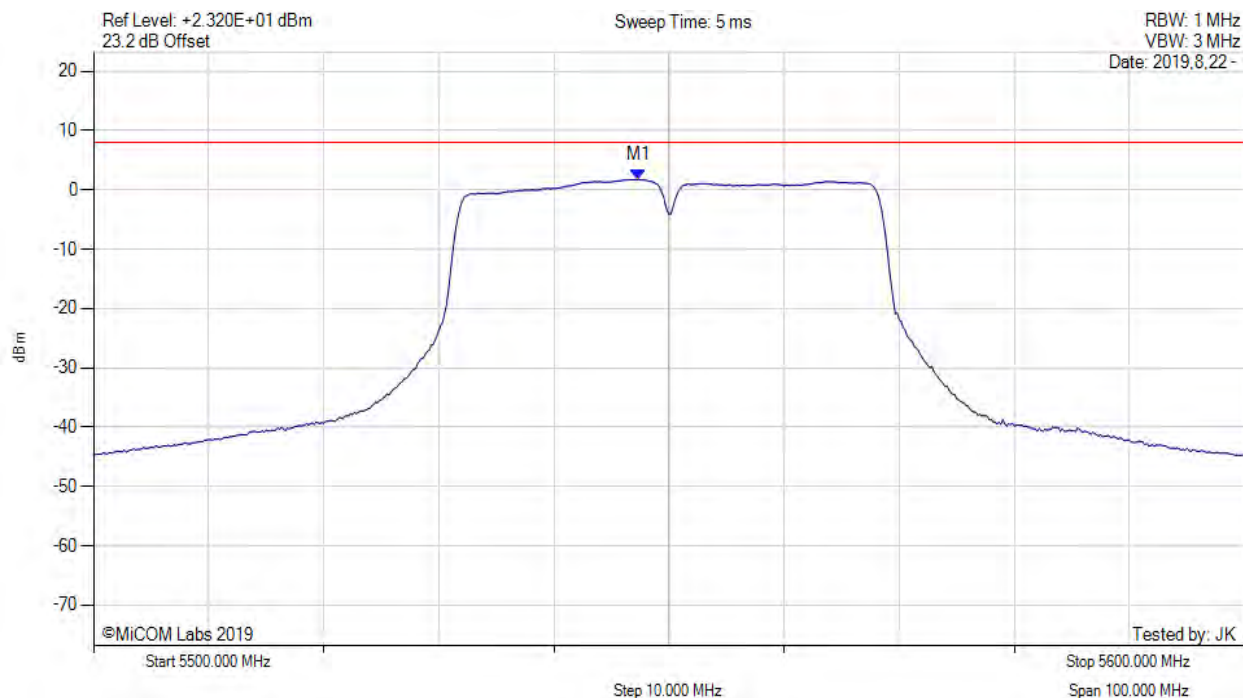


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5547.300 MHz : 1.759 dBm M1 + DCCF : 5547.300 MHz : 1.847 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: $\leq 8.0$ dBm Margin: -6.2 dB

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5710.00 MHz, Chain a, Temp: 20, Voltage: Vdc

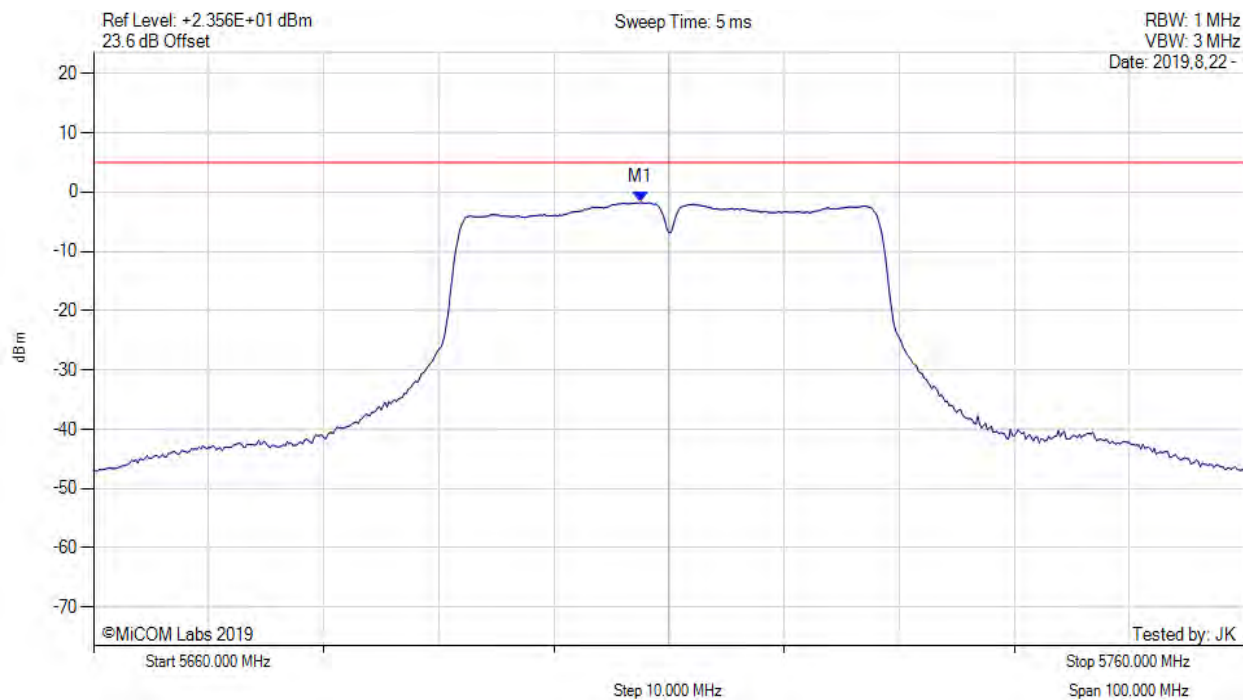

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5707.500 MHz : -1.751 dBm	Limit: ≤ 4.990 dBm


[back to matrix](#)



# POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5710.00 MHz, Chain b, Temp: 20, Voltage: Vdc

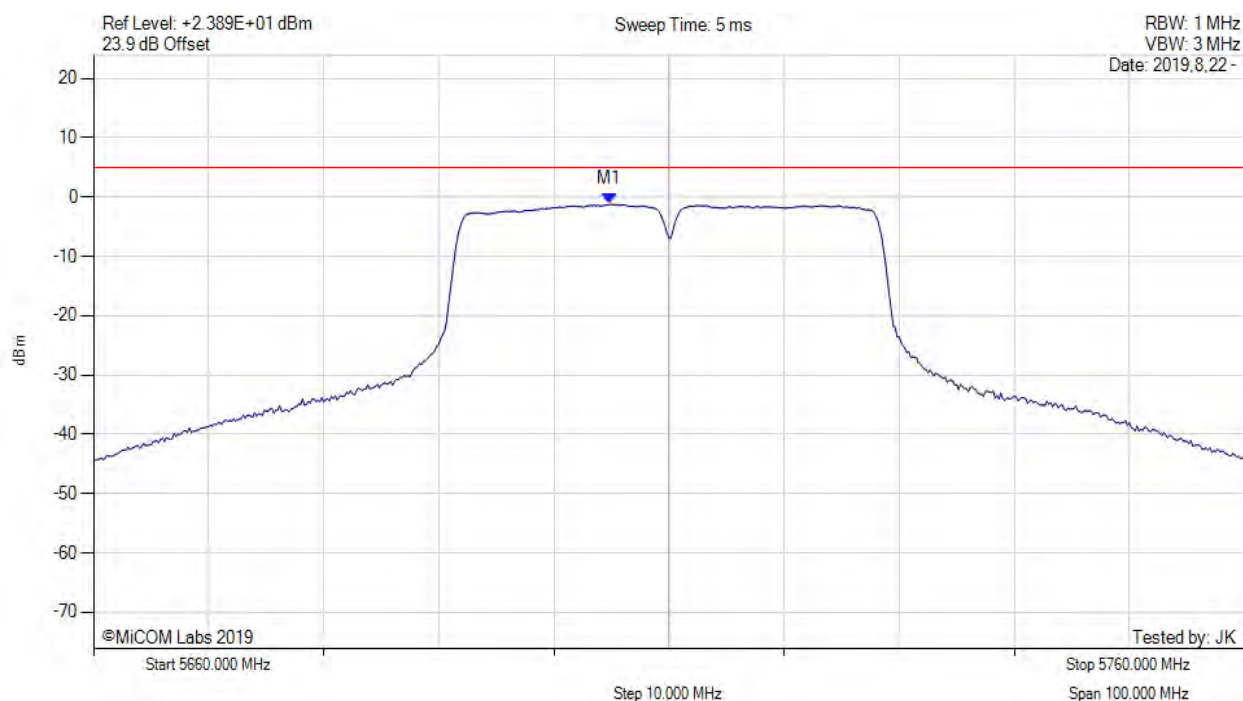


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5704.830 MHz : -1.226 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

# POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5710.00 MHz, SUM, Temp: 20, Voltage: Vdc

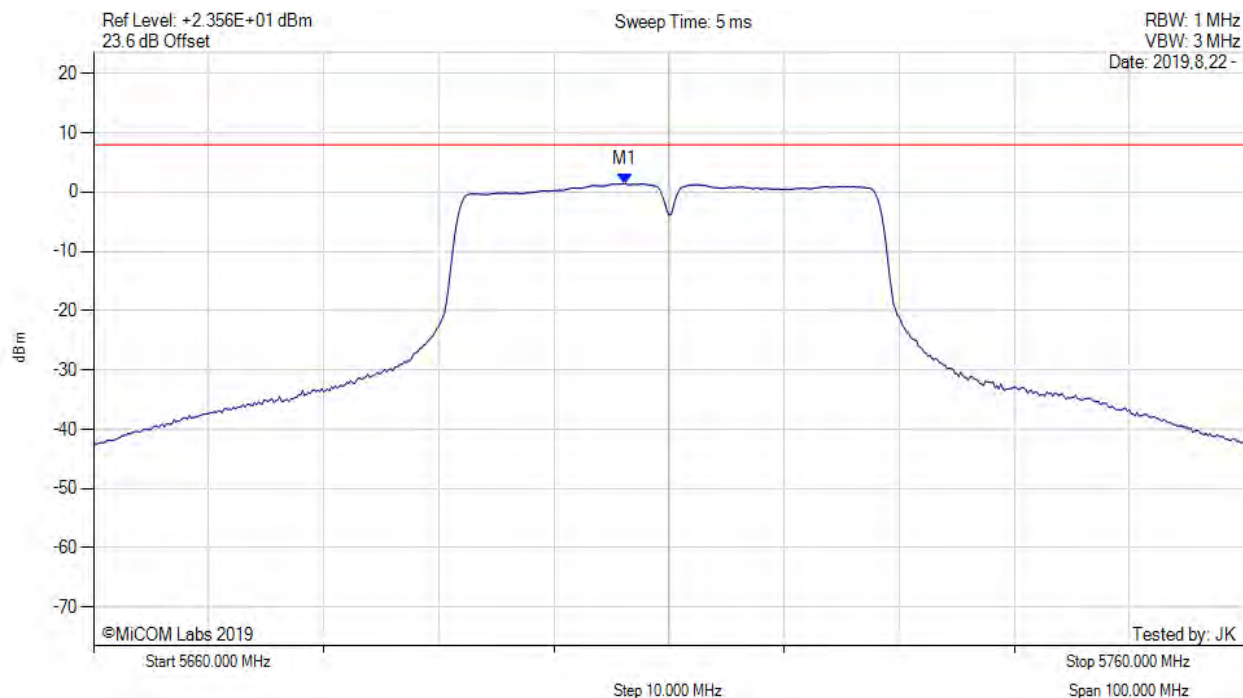

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = +100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5706.200 MHz : 1.422 dBm M1 + DCCF : 5706.200 MHz : 1.510 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: ≤ 8.0 dBm Margin: -6.5 dB

[back to matrix](#)



575 Boulder Court  
Pleasanton, California 94566, USA  
Tel: +1 (925) 462 0304  
Fax: +1 (925) 462 0306  
[www.micomlabs.com](http://www.micomlabs.com)