

TEST REPORT

FCC LTE B5 Test for TM19FNNABD2
Certification

APPLICANT
LG Electronics Inc.

REPORT NO.
HCT-RF-2412-FC024

DATE OF ISSUE
December 13, 2024

Tested by
Jae Ryang Do



Technical Manager
Jong Seok Lee



HCT CO., LTD.
Bongjai Huh
BongJai Huh / CEO

**HCT CO.,LTD.**

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea
Tel. +82 31 645 6300 Fax. +82 31 645 6401

TEST REPORT

REPORT NO.

HCT-RF-2412-FC024

DATE OF ISSUE

December 13, 2024

Applicant

LG Electronics Inc.

128, Yeoui-daero, Yeongdeungpo-gu, Seoul, Republic of Korea

Product Name

Telematics

Model Name

TM19FNNNAHD2

Date of Test

September 30, 2024 ~ December 10, 2024

FCC ID

BEJTM19FNNNAHD2

Location of Test

☒ Permanent Testing Lab ☐ On Site Testing

(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea)

FCC Classification:

PCB Licensed Transmitter (PCB)

Test Standard Used

FCC Rule Part: § 22

Test Results

PASS

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	December 13, 2024	Initial Release

Notice

Content

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section § 2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C. 853(a)

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

The laboratory is not accredited for the test results marked *.

Information provided by the applicant is marked **.

Test results provided by external providers are marked ***.

When confirmation of authenticity of this test report is required, please contact www.hct.co.kr

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

CONTENTS

1. GENERAL INFORMATION	5
1.1. MAXIMUM OUTPUT POWER	6
2. INTRODUCTION	7
2.1. DESCRIPTION OF EUT	7
2.2. MEASURING INSTRUMENT CALIBRATION	7
2.3. TEST FACILITY	7
3. DESCRIPTION OF TESTS	8
3.1 TEST PROCEDURE	8
3.2 CONDUCTED OUTPUT POWER	9
3.3 RADIATED POWER	10
3.4 RADIATED SPURIOUS EMISSIONS	11
3.5 PEAK- TO- AVERAGE RATIO	12
3.6 OCCUPIED BANDWIDTH.	14
3.7 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	15
3.8 BAND EDGE	16
3.9 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	18
3.10 WORST CASE(RADIATED TEST)	19
3.11 WORST CASE(CONDUCTED TEST)	20
4. LIST OF TEST EQUIPMENT	21
5. MEASUREMENT UNCERTAINTY	22
6. SUMMARY OF TEST RESULTS	23
7. SAMPLE CALCULATION	24
8. TEST DATA	26
8.1 Conducted Output Power	26
8.2 EFFECTIVE RADIATED POWER	30
8.3 RADIATED SPURIOUS EMISSIONS	32
8.4 PEAK-TO-AVERAGE RATIO	33
8.5 OCCUPIED BANDWIDTH	34
8.6 CONDUCTED SPURIOUS EMISSIONS	35
8.7 BAND EDGE	35
8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	36
9. TEST PLOTS	40
10. ANNEX A_ TEST SETUP PHOTO	109

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	LG Electronics Inc.
Address:	128, Yeoui-daero, Yeongdeungpo-gu, Seoul, Republic of Korea
FCC ID:	BEJTM19FNNAHD2
Application Type:	Certification
FCC Classification:	PCB Licensed Transmitter (PCB)
FCC Rule Part(s):	§ 22
EUT Type:	Telematics
Model(s):	TM19FNNAHD2
Tx Frequency:	824.7 MHz – 848.3 MHz (LTE – Band 5 (1.4 MHz)) 825.5 MHz – 847.5 MHz (LTE – Band 5 (3 MHz)) 826.5 MHz – 846.5 MHz (LTE – Band 5 (5 MHz)) 829.0 MHz – 844.0 MHz (LTE – Band 5 (10 MHz))
Date(s) of Tests:	September 30, 2024 ~ December 10, 2024
Serial number:	Radiated : Honda MY26 #03 Conducted : Honda MY26 #01
Antenna Information	Please refer to the Antenna Approval Specification document.

1.1. MAXIMUM OUTPUT POWER

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	Conducted Output Power	
				Max. Power (W)	Max. Power (dBm)
LTE – Band5 (1.4)	824.7 – 848.3	1M09G7D	QPSK	0.191	22.81
		1M09W7D	16QAM	0.169	22.27
		1M09W7D	64QAM	0.128	21.08
		1M09W7D	256QAM	0.067	18.27
LTE – Band5 (3)	825.5 – 847.5	2M71G7D	QPSK	0.191	22.81
		2M70W7D	16QAM	0.166	22.19
		2M71W7D	64QAM	0.127	21.05
		2M70W7D	256QAM	0.069	18.37
LTE – Band5 (5)	826.5 – 846.5	4M51G7D	QPSK	0.194	22.88
		4M49W7D	16QAM	0.172	22.35
		4M50W7D	64QAM	0.131	21.16
		4M50W7D	256QAM	0.069	18.37
LTE – Band5 (10)	829.0 – 844.0	8M96G7D	QPSK	0.191	22.82
		8M96W7D	16QAM	0.177	22.47
		8M95W7D	64QAM	0.128	21.08
		8M96W7D	256QAM	0.072	18.57

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Telematics with LTE, Sub 6.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY


The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- KDB 971168 D01 v03r01 - Section 5.2.4 - ANSI C63.26-2015 - Section 5.2.1 & 5.2.4.2
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Radiated Power	- ANSI C63.26-2015 – Section 5.2.4.4 - KDB 971168 D01 v03r01 – Section 5.8
Radiated Spurious and Harmonic Emissions	- ANSI C63.26-2015 – Section 5.5.3 - KDB 971168 D01 v03r01 – Section 5.8

3.2 CONDUCTED OUTPUT POWER

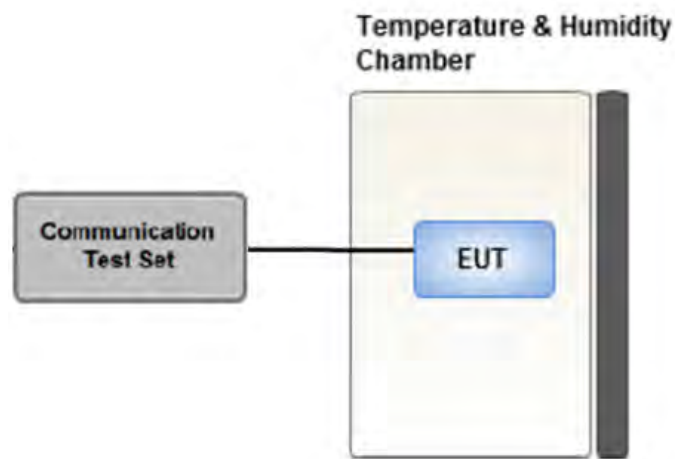

Test setup

Test Overview

When an average power meter is used to perform RF output power measurements, the fundamental condition that measurements be performed only over durations of active transmissions at maximum output power level applies.

Conducted Output Power was tested in accordance with KDB971168 D01 Power Meas License Digital Systems v03r01, Section 5.2.

3.3 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points > 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.4 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW \geq 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points > 2 x span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser
if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit)
and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets,
and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is
driven by a signal generator and the previously recorded signal was duplicated.
The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_g_{(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

3.5 PEAK- TO- AVERAGE RATIO

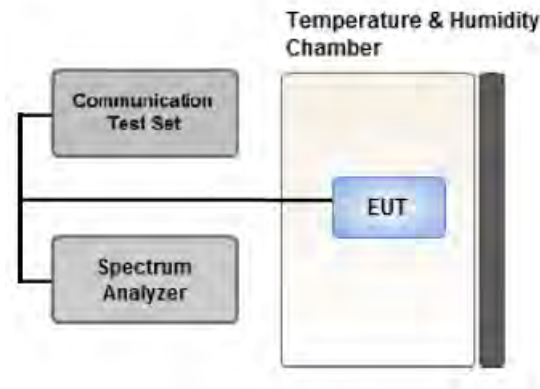

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW \geq OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) \times (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW \geq OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6 \text{ dB}$ if the duty cycle is a constant 25 %.

3.6 OCCUPIED BANDWIDTH.

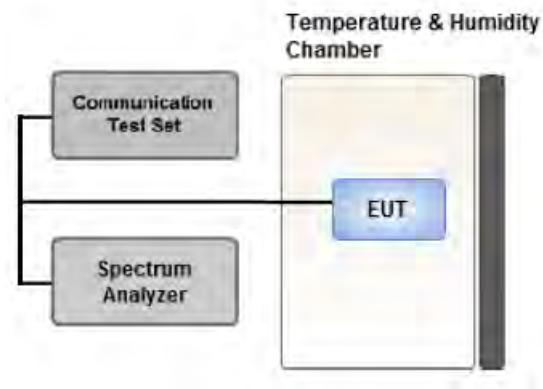

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.

The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.


The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency.

Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.7 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

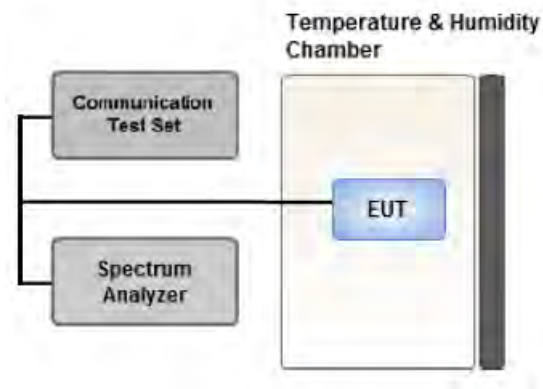

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = Peak
4. Trace Mode = Max Hold
5. Sweep time = auto
6. Number of points in sweep \geq 2 x Span / RBW

3.8 BAND EDGE

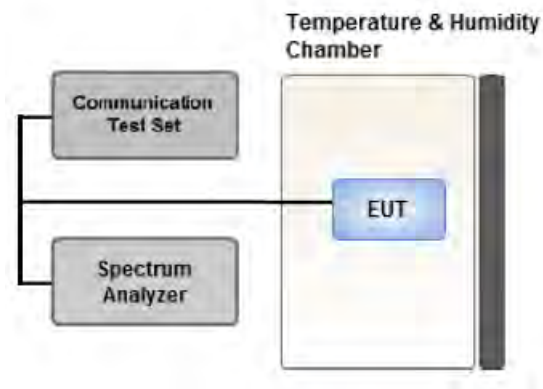

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes


According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Where Margin < 1 dB the emission level is either corrected by $10 \log(1 \text{ MHz} / \text{RB})$ or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

3.9 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

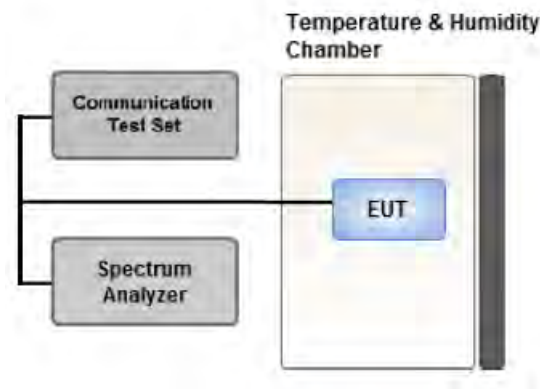

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

.- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.

.- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature

(20 °C to provide a reference).

2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter.

Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.10 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
- All simultaneous transmission scenarios of operation were investigated, and the test results showed no additional significant emissions relative to the least restrictive limit were observed.
Therefore, only the worst case(stand-alone) results were reported.
- In the case of radiated spurious emissions, all bandwidth of operation were investigated and the worst case bandwidth results are reported. (Worst case : 10 MHz)
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.

[Internal Antenna Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	See Section 8.2		X
Radiated Spurious and Harmonic Emissions	QPSK	See Section 8.3		X

3.11 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10	Mid	Full RB	0
Peak-To-Average Ratio	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10	Mid	Full RB	0
Band Edge	QPSK	1.4	Low	1	0
			High	1	5
		3	Low	1	0
			High	1	14
		5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
Band Edge	QPSK	1.4, 3, 5, 10	Low, High	Full RB	0
			Low, Mid, High	1	0
Spurious and Harmonic Emissions at Antenna Terminal	QPSK	1.4, 3, 5, 10	Low, Mid, High	1	0

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacture	Serial No.	Due to Calibration	Calibration Interval
RF Switching System	Switch box(1.2 G HPF+LNA)	HCT CO., LTD.,	F1L1	11/11/2025	Annual
RF Switching System	Switch box(3.3 G HPF+LNA)	HCT CO., LTD.,	F1L2	11/11/2025	Annual
RF Switching System	Switch box(LNA)	HCT CO., LTD.,	F1L4	11/11/2025	Annual
RF Switching System	Switch box(6 G HPF+LNA)	HCT CO., LTD.,	F1L7	11/11/2025	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	5001	04/17/2025	Annual
DC Power Supply	E3632A	Agilent	MY40010147	08/06/2025	Annual
Dipole Antenna	UHAP	Schwarzbeck	01274	03/10/2026	Biennial
Dipole Antenna	UHAP	Schwarzbeck	01288	08/07/2026	Biennial
Chamber	SU-642	ESPEC	93008124	02/19/2025	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/17/2025	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/11/2025	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/20/2026	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	04/19/2025	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	04/17/2025	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	08/06/2025	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/05/2025	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/07/2026	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	895	08/28/2026	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	1135	08/19/2026	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262094331	11/13/2025	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6201026545	12/11/2024	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/26/2025	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/17/2025	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.98 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.36 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.70 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.52 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.66 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.58 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§ 2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§ 2.1051, § 22.917(a)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§ 2.1046	N/A	PASS
Peak- to- Average Ratio	§ 22.913(d)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§ 2.1055, § 22.355	< 2.5 ppm	PASS

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§ 22.913(a)(5)	< 7 Watts max. ERP	PASS
Radiated Spurious and Harmonic Emissions	§ 2.1053, § 22.917(a)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

6.3. Data Referencing

Rule Part	Test item	Data Referencing	Comments
§2.1049	Occupied Bandwidth	Y	-
§2.1051, §22.917(a)	Band Edge / Spurious and Harmonic Emissions at Antenna Terminal..	Y	-
§22.913(d)	Peak- to- Average Ratio	Y	-
§2.1055, §22.355	Frequency stability / variation of ambient temperature	Y	-
§22.913(a)(5)	Effective Radiated Power	Y	Spot-check
§2.1053, §22.917(a)	Radiated Spurious and Harmonic Emissions	Y	Spot-check
§2.1046	Conducted Output Power	Y	-

Spot-Check Result

1. Data was leveraged from model TM19FNNAHD4 for the certification of TM19FNNAHD2.
2. Please refer to the [FCC Evaluation] Report.

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 Conducted Output Power

Bandwidth	Modulation	RB Size	RB Offset	Max.Average Power (dBm)			Target MPR (dB)	Target Power
				20407	20525	20643		
				824.7 MHz	836.5 MHz	848.3 MHz		
1.4 MHz	QPSK	1	0	22.73	22.61	22.71	0	23
		1	3	22.81	22.75	22.76	0	23
		1	5	22.72	22.72	22.65	0	23
		3	0	22.67	22.68	22.71	1	22
		3	1	22.80	22.70	22.72	1	22
		3	3	22.70	22.68	22.67	1	22
		6	0	21.75	21.84	21.74	1	22
	16QAM	1	0	22.07	22.26	21.91	1	22
		1	3	22.18	22.27	22.20	1	22
		1	5	22.08	22.02	22.04	1	22
		3	0	21.91	21.86	21.95	2	21
		3	1	21.98	21.99	21.91	2	21
		3	3	21.89	21.90	21.91	2	21
		6	0	20.80	20.84	20.84	2	21
	64QAM	1	0	20.89	20.89	20.94	2	21
		1	3	21.04	21.08	20.98	2	21
		1	5	20.97	20.78	20.77	2	21
		3	0	20.89	20.80	20.87	2	21
		3	1	20.91	20.81	20.86	2	21
		3	3	20.88	20.81	20.72	2	21
		6	0	19.87	19.79	19.74	3	20
	256QAM	1	0	18.23	18.03	18.17	5	18
		1	3	18.18	18.27	18.06	5	18
		1	5	18.08	18.09	18.03	5	18
		3	0	18.19	18.16	18.19	5	18
		3	1	18.22	18.19	18.21	5	18
		3	3	18.17	18.14	18.13	5	18
		6	0	18.04	18.02	18.05	5	18

Bandwidth	Modulation	RB Size	RB Offset	Max.Average Power (dBm)			Target MPR (dB)	Target Power
				20415	20525	20635		
				825.5 MHz	836.5 MHz	847.5 MHz		
3 MHz	QPSK	1	0	22.81	22.80	22.75	0	23
		1	7	22.69	22.81	22.75	0	23
		1	14	22.69	22.79	22.68	0	23
		8	0	21.97	21.86	21.78	1	22
		8	3	21.89	21.84	21.84	1	22
		8	7	21.86	21.81	21.82	1	22
		15	0	21.90	21.83	21.82	1	22
	16QAM	1	0	22.19	22.06	22.18	1	22
		1	7	22.09	22.19	22.17	1	22
		1	14	22.02	22.04	21.91	1	22
		8	0	20.92	20.95	20.92	2	21
		8	3	20.95	20.95	20.84	2	21
		8	7	20.89	20.90	20.86	2	21
		15	0	20.95	20.92	20.89	2	21
	64QAM	1	0	21.05	20.99	20.90	2	21
		1	7	20.79	21.00	20.92	2	21
		1	14	20.93	21.05	20.82	2	21
		8	0	19.88	19.89	19.85	3	20
		8	3	19.98	19.90	19.88	3	20
		8	7	19.95	19.81	19.84	3	20
		15	0	19.94	19.81	19.76	3	20
	256QAM	1	0	18.25	18.36	18.25	5	18
		1	7	18.20	18.37	18.34	5	18
		1	14	18.26	18.19	18.20	5	18
		8	0	18.21	18.17	18.14	5	18
		8	3	18.22	18.18	18.09	5	18
		8	7	18.17	18.20	18.12	5	18
		15	0	18.18	18.13	18.09	5	18

Bandwidth	Modulation	RB Size	RB Offset	Max.Average Power (dBm)			Target MPR (dB)	Target Power
				20425	20525	20625		
				826.5 MHz	836.5 MHz	846.5 MHz		
5 MHz	QPSK	1	0	22.79	22.88	22.86	0	23
		1	12	22.75	22.77	22.83	0	23
		1	24	22.75	22.74	22.73	0	23
		12	0	21.91	21.88	21.85	1	22
		12	6	21.93	21.87	21.77	1	22
		12	11	21.84	21.89	21.80	1	22
		25	0	21.91	21.83	21.90	1	22
	16QAM	1	0	22.35	22.20	22.15	1	22
		1	12	22.15	22.11	22.12	1	22
		1	24	22.06	22.11	22.08	1	22
		12	0	20.94	20.97	20.93	2	21
		12	6	20.99	20.95	20.89	2	21
		12	11	20.93	20.90	20.94	2	21
		25	0	20.98	20.92	20.88	2	21
	64QAM	1	0	21.16	21.11	20.50	2	21
		1	12	20.94	20.88	21.00	2	21
		1	24	21.03	21.06	20.63	2	21
		12	0	19.90	19.90	19.58	3	20
		12	6	19.87	19.91	19.85	3	20
		12	11	19.86	19.90	19.82	3	20
		25	0	19.88	19.84	19.71	3	20
	256QAM	1	0	18.37	18.22	18.21	5	18
		1	12	18.18	18.24	18.19	5	18
		1	24	18.23	18.35	18.23	5	18
		12	0	18.34	18.22	18.19	5	18
		12	6	18.26	18.15	18.18	5	18
		12	11	18.24	18.13	18.14	5	18
		25	0	18.31	18.13	18.11	5	18

Bandwidth	Modulation	RB Size	RB Offset	Max.Average Power (dBm)			Target MPR (dB)	Target Power
				20450	20525	20600		
				829 MHz	836.5 MHz	844 MHz		
10 MHz	QPSK	1	0	22.82	22.78	22.81	0	23
		1	24	22.56	22.72	22.52	0	23
		1	49	22.78	22.68	22.69	0	23
		25	0	21.88	21.95	21.91	1	22
		25	12	21.95	21.88	21.82	1	22
		25	24	21.85	21.85	21.82	1	22
		50	0	21.94	21.91	21.91	1	22
	16QAM	1	0	22.18	22.21	22.27	1	22
		1	24	22.07	22.47	22.17	1	22
		1	49	22.12	22.01	22.17	1	22
		25	0	20.89	20.93	20.99	2	21
		25	12	20.94	20.90	20.88	2	21
		25	24	20.87	20.97	20.82	2	21
		50	0	20.90	20.85	20.91	2	21
	64QAM	1	0	21.02	20.92	21.08	2	21
		1	24	20.99	21.03	20.60	2	21
		1	49	20.97	20.83	20.86	2	21
		25	0	19.90	19.88	19.82	3	20
		25	12	19.95	19.87	19.54	3	20
		25	24	19.85	19.94	19.73	3	20
		50	0	19.89	19.88	19.88	3	20
	256QAM	1	0	18.33	18.25	18.19	5	18
		1	24	18.22	18.26	18.30	5	18
		1	49	18.57	18.22	18.25	5	18
		25	0	18.27	18.21	18.25	5	18
		25	12	18.37	18.29	18.29	5	18
		25	24	18.25	18.30	18.08	5	18
		50	0	18.32	18.19	18.28	5	18

8.2 EFFECTIVE RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured	Substitute	Ant. Gain(dBd)	C.L	Pol	Limit	ERP		RB	
			Level (dBm)	Level (dBm)				W	W	dBm	Size	Offset
824.7	LTE B5 (1.4 MHz)	QPSK	-28.46	33.86	-10.24	1.44	V	< 7.00	0.165	22.18	1	0
		16-QAM	-29.15	33.17	-10.24	1.44	V		0.141	21.49		
		64-QAM	-30.17	32.15	-10.24	1.44	V		0.111	20.47		
		256-QAM	-33.22	29.10	-10.24	1.44	V		0.055	17.42		
836.5		QPSK	-28.60	33.82	-10.18	1.45	V		0.166	22.19	1	0
		16-QAM	-29.25	33.17	-10.18	1.45	V		0.143	21.54		
		64-QAM	-30.25	32.17	-10.18	1.45	V		0.113	20.54		
		256-QAM	-33.15	29.27	-10.18	1.45	V		0.058	17.64		
848.3		QPSK	-29.30	33.39	-10.12	1.45	V		0.152	21.82	1	0
		16-QAM	-29.94	32.75	-10.12	1.45	V		0.131	21.18		
		64-QAM	-31.23	31.46	-10.12	1.45	V		0.097	19.89		
		256-QAM	-33.97	28.72	-10.12	1.45	V		0.052	17.15		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured	Substitute	Ant. Gain(dBd)	C.L	Pol	Limit	ERP		RB	
			Level (dBm)	Level (dBm)				W	W	dBm	Size	Offset
825.5	LTE B5 (1.4 MHz)	QPSK	-28.22	34.14	-10.24	1.44	V	< 7.00	0.176	22.46	1	0
		16-QAM	-28.90	33.46	-10.24	1.44	V		0.151	21.78		
		64-QAM	-30.06	32.30	-10.24	1.44	V		0.115	20.62		
		256-QAM	-33.06	29.30	-10.24	1.44	V		0.058	17.62		
836.5		QPSK	-28.18	34.24	-10.18	1.45	V		0.182	22.61	1	0
		16-QAM	-28.79	33.63	-10.18	1.45	V		0.158	22.00		
		64-QAM	-29.88	32.54	-10.18	1.45	V		0.123	20.91		
		256-QAM	-32.89	29.53	-10.18	1.45	V		0.062	17.90		
847.5		QPSK	-28.87	33.85	-10.12	1.45	V		0.169	22.28	1	0
		16-QAM	-29.55	33.17	-10.12	1.45	V		0.145	21.60		
		64-QAM	-31.04	31.68	-10.12	1.45	V		0.103	20.11		
		256-QAM	-33.65	29.07	-10.12	1.45	V		0.056	17.50		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured	Substitute	Ant. Gain(dBd)	C.L	Pol	Limit	ERP		RB	
			Level (dBm)	Level (dBm)				W	W	dBm	Size	Offset
826.5	LTE B5 (5 MHz)	QPSK	-28.17	34.24	-10.23	1.44	V	< 7.00	0.181	22.57	1	0
		16-QAM	-28.80	33.61	-10.23	1.44	V		0.156	21.94		
		64-QAM	-29.98	32.43	-10.23	1.44	V		0.119	20.76		
		256-QAM	-32.94	29.47	-10.23	1.44	V		0.060	17.80		
836.5		QPSK	-28.15	34.27	-10.18	1.45	V		0.184	22.64	1	0
		16-QAM	-28.78	33.64	-10.18	1.45	V		0.159	22.01		
		64-QAM	-29.91	32.51	-10.18	1.45	V		0.122	20.88		
		256-QAM	-32.94	29.48	-10.18	1.45	V		0.061	17.85		
846.5		QPSK	-28.58	34.18	-10.13	1.45	V		0.182	22.60	1	0
		16-QAM	-29.26	33.50	-10.13	1.45	V		0.156	21.92		
		64-QAM	-30.54	32.22	-10.13	1.45	V		0.116	20.64		
		256-QAM	-33.37	29.39	-10.13	1.45	V		0.060	17.81		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured	Substitute	Ant. Gain(dBd)	C.L	Pol	Limit	ERP		RB	
			Level (dBm)	Level (dBm)				W	W	dBm	Size	Offset
829	LTE B5 (10 MHz)	QPSK	-28.20	34.16	-10.22	1.44	V	< 7.00	0.178	22.50	1	0
		16-QAM	-28.82	33.54	-10.22	1.44	V		0.154	21.88		
		64-QAM	-30.04	32.32	-10.22	1.44	V		0.116	20.66		
		256-QAM	-33.03	29.33	-10.22	1.44	V		0.058	17.67		
836.5		QPSK	-28.22	34.20	-10.18	1.45	V		0.181	22.57	1	0
		16-QAM	-28.81	33.61	-10.18	1.45	V		0.158	21.98		
		64-QAM	-30.01	32.41	-10.18	1.45	V		0.120	20.78		
		256-QAM	-33.04	29.38	-10.18	1.45	V		0.060	17.75		
844		QPSK	-28.23	34.41	-10.14	1.45	V		0.191	22.82	1	0
		16-QAM	-28.74	33.90	-10.14	1.45	V		0.170	22.31		
		64-QAM	-30.01	32.63	-10.14	1.45	V		0.127	21.04		
		256-QAM	-33.08	29.56	-10.14	1.45	V		0.063	17.97		

8.3 RADIATED SPURIOUS EMISSIONS

MODE: LTE B5
 MODULATION SIGNAL: 10 MHz QPSK
 DISTANCE: 3 meters

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Offset
20450 (829.0)	1658.00	-43.98	9.63	-59.47	2.03	H	-51.87	-13.00	1	0
	2487.00	-46.86	10.38	-58.10	2.53	H	-50.25	-13.00		
	3316.00	-47.58	12.23	-57.02	2.99	H	-47.78	-13.00		
20525 (836.5)	1673.00	-37.96	9.72	-53.61	2.05	V	-45.94	-13.00	1	0
	2509.50	-46.81	10.59	-57.98	2.51	V	-49.90	-13.00		
	3346.00	-47.39	12.37	-57.18	2.96	H	-47.77	-13.00		
20600 (844.0)	1688.00	-37.51	9.82	-53.11	2.06	V	-45.35	-13.00	1	0
	2532.00	-47.32	10.67	-58.60	2.54	H	-50.47	-13.00		
	3376.00	-48.84	12.51	-58.86	2.98	V	-49.33	-13.00		

8.4 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
5	1.4 MHz	836.5	QPSK	6	0	5.20
			16-QAM			5.99
			64-QAM			6.59
			256-QAM			6.55
	3 MHz		QPSK	15		5.09
			16-QAM			5.92
			64-QAM			6.50
			256-QAM			6.55
	5 MHz		QPSK	25		4.99
			16-QAM			5.81
			64-QAM			6.46
			256-QAM			6.54
	10 MHz		QPSK	50		4.82
			16-QAM			5.69
			64-QAM			6.49
			256-QAM			6.49

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 41~ 56.

8.5 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
5	1.4 MHz	836.5	QPSK	6	0	1.0940
			16-QAM			1.0901
			64-QAM			1.0908
			256-QAM			1.0895
	3 MHz		QPSK	15		2.7072
			16-QAM			2.7008
			64-QAM			2.7077
			256-QAM			2.7007
	5 MHz		QPSK	25		4.5065
			16-QAM			4.4874
			64-QAM			4.4996
			256-QAM			4.5008
	10 MHz		QPSK	50		8.9612
			16-QAM			8.9562
			64-QAM			8.9505
			256-QAM			8.9636

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 57 ~ 72.

8.6 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
B5	1.4	824.7	3.7089	28.112	-56.968	-28.856	-13.00
		836.5	3.1661	28.112	-57.922	-29.810	
		848.3	6.2986	28.634	-58.017	-29.383	
	3	826.5	5.6880	28.634	-56.532	-27.898	
		836.5	3.1925	28.112	-57.431	-29.319	
		846.5	6.5933	28.634	-57.363	-28.729	
	5	826.5	3.6915	28.112	-57.353	-29.241	
		836.5	3.7129	28.112	-57.034	-28.922	
		846.5	3.0255	28.112	-57.913	-29.801	
	10	829.0	2.6686	28.112	-57.698	-29.586	
		836.5	9.6231	28.634	-57.926	-29.292	
		844.0	3.6855	28.112	-57.506	-29.394	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 73 ~ 84.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	27.500
1 – 5	28.112
5 – 10	28.634
10 – 15	29.245
15 – 20	29.511
Above 20(26.5)	30.210


8.7 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 85 ~ 108.

8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


MODE:	LTE B5
OPERATING FREQUENCY:	836,500,000 Hz
CHANNEL:	20525 (1.4 MHz)
REFERENCE VOLTAGE:	13.200 VDC
DEVIATION LIMIT:	$\pm 0.00025\%$ or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	13.200	+20(Ref)	836 499 995	0.0	0.000 000	0.000
100 %		-30	836 500 000	4.7	0.000 001	0.006
100 %		-20	836 499 992	-3.2	0.000 000	-0.004
100 %		-10	836 500 000	4.2	0.000 001	0.005
100 %		0	836 499 993	-2.4	0.000 000	-0.003
100 %		+10	836 499 989	-6.0	-0.000 001	-0.007
100 %		+30	836 499 998	2.3	0.000 000	0.003
100 %		+40	836 499 992	-3.1	0.000 000	-0.004
100 %		+50	836 499 989	-6.1	-0.000 001	-0.007
115 %		20	836 499 992	-3.3	0.000 000	-0.004
85 %		20	836 499 998	2.3	0.000 000	0.003

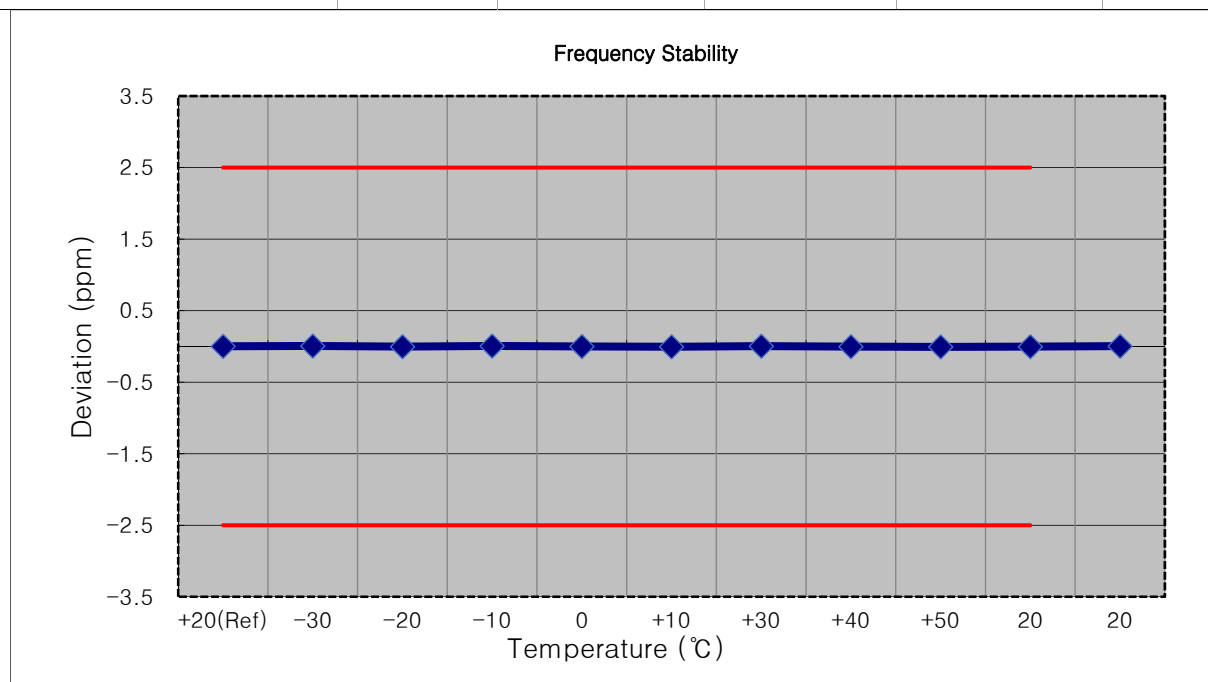


MODE: LTE B5
 OPERATING FREQUENCY: 836,500,000 Hz
 CHANNEL: 20525(3 MHz)
 REFERENCE VOLTAGE: 13.200 VDC
 DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	13.200	+20(Ref)	836 500 005	0.0	0.000 000	0.000
100 %		-30	836 500 004	-1.5	0.000 000	-0.002
100 %		-20	836 500 000	-5.9	-0.000 001	-0.007
100 %		-10	836 500 004	-1.9	0.000 000	-0.002
100 %		0	836 500 000	-5.5	-0.000 001	-0.007
100 %		+10	836 500 008	2.2	0.000 000	0.003
100 %		+30	836 500 003	-2.8	0.000 000	-0.003
100 %		+40	836 499 998	-7.3	-0.000 001	-0.009
100 %		+50	836 500 007	1.4	0.000 000	0.002
115 %		20	836 500 007	1.1	0.000 000	0.001
85 %		20	836 500 001	-4.5	-0.000 001	-0.005

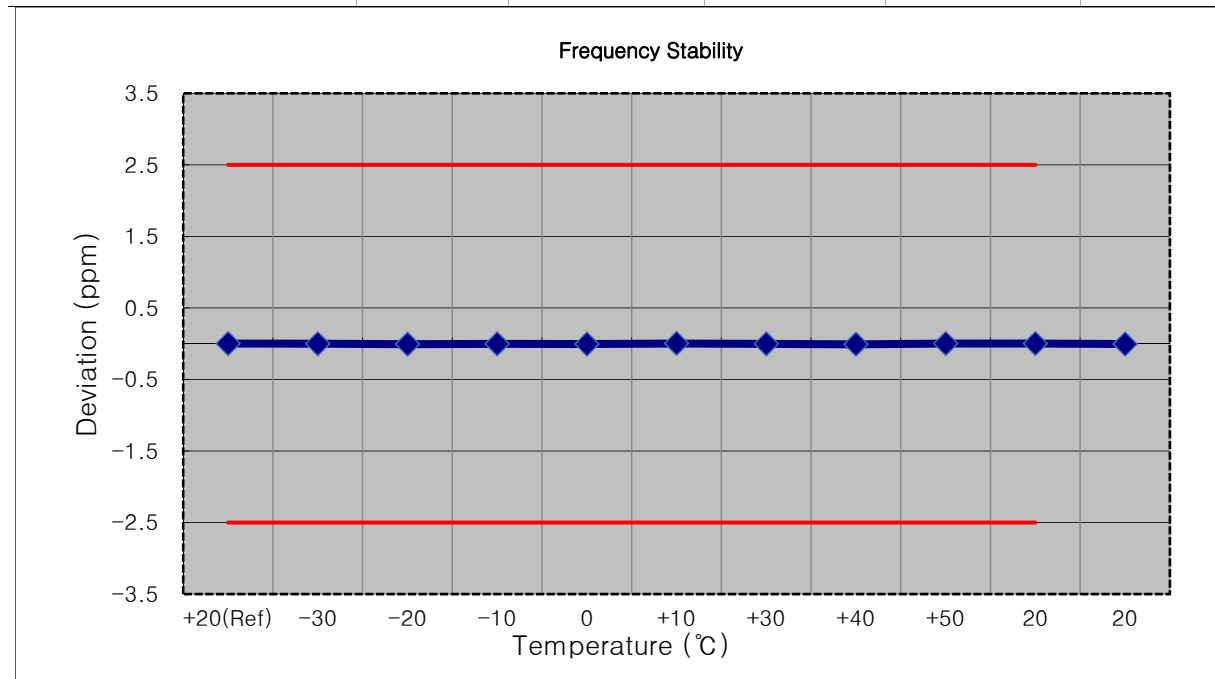


MODE:	<u>LTE B5</u>
OPERATING FREQUENCY:	<u>836,500,000 Hz</u>
CHANNEL:	<u>20525(5 MHz)</u>
REFERENCE VOLTAGE:	<u>13.200 VDC</u>
DEVIATION LIMIT:	<u>± 0.000 25 % or 2.5 ppm</u>

Voltage	Power	Temp.	Frequency	Frequency	Deviation	
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	ppm
100 %	13.200	+20(Ref)	836 500 003	0.0	0.000 000	0.000
100 %		-30	836 500 002	-1.2	0.000 000	-0.001
100 %		-20	836 499 998	-5.0	-0.000 001	-0.006
100 %		-10	836 500 007	4.0	0.000 000	0.005
100 %		0	836 500 005	1.7	0.000 000	0.002
100 %		+10	836 499 999	-4.2	-0.000 001	-0.005
100 %		+30	836 500 008	5.1	0.000 001	0.006
100 %		+40	836 499 993	-9.9	-0.000 001	-0.012
100 %		+50	836 500 000	-2.5	0.000 000	-0.003
115 %		20	836 500 003	-0.1	0.000 000	0.000
85 %		20	836 499 998	-5.3	-0.000 001	-0.006

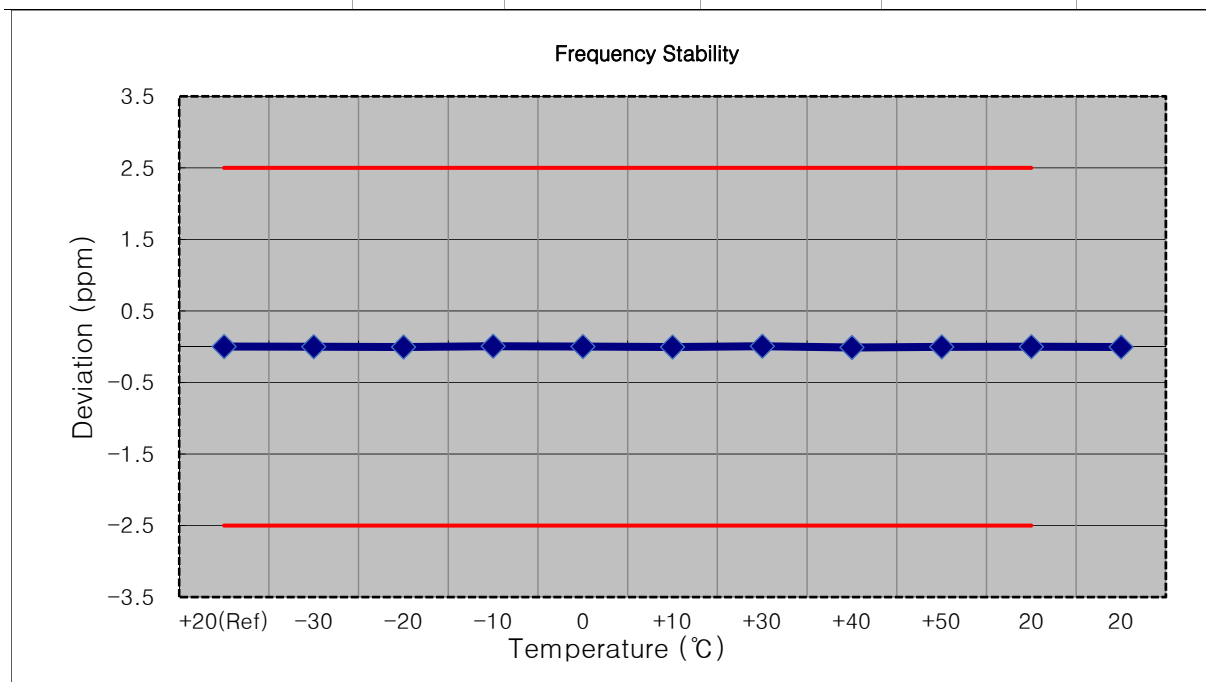


MODE:	<u>LTE B5</u>
OPERATING FREQUENCY:	<u>836,500,000 Hz</u>
CHANNEL:	<u>20525(10 MHz)</u>
REFERENCE VOLTAGE:	<u>13.200 VDC</u>
DEVIATION LIMIT:	<u>± 0.000 25 % or 2.5 ppm</u>

Voltage	Power	Temp.	Frequency	Frequency	Deviation	
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	ppm
100 %	13.200	+20(Ref)	836 500 003	0.0	0.000 000	0.000
100 %		-30	836 500 005	2.1	0.000 000	0.003
100 %		-20	836 500 009	5.9	0.000 001	0.007
100 %		-10	836 500 010	6.5	0.000 001	0.008
100 %		0	836 500 009	5.3	0.000 001	0.006
100 %		+10	836 500 005	1.8	0.000 000	0.002
100 %		+30	836 500 002	-1.7	0.000 000	-0.002
100 %		+40	836 500 000	-3.4	0.000 000	-0.004
100 %		+50	836 500 009	6.2	0.000 001	0.007
115 %		20	836 500 009	5.5	0.000 001	0.007
85 %		20	836 500 007	3.8	0.000 000	0.005

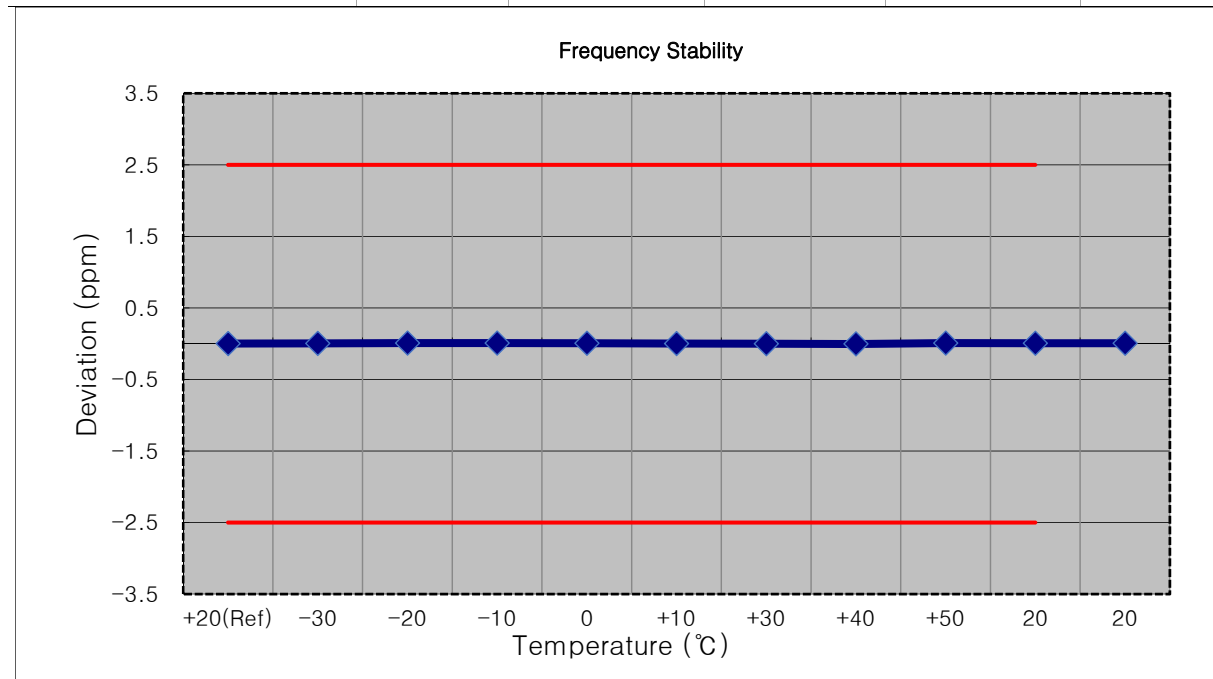


9. TEST PLOTS


LTE B5_1.4M_PAR_Mid_QPSK_FullRB

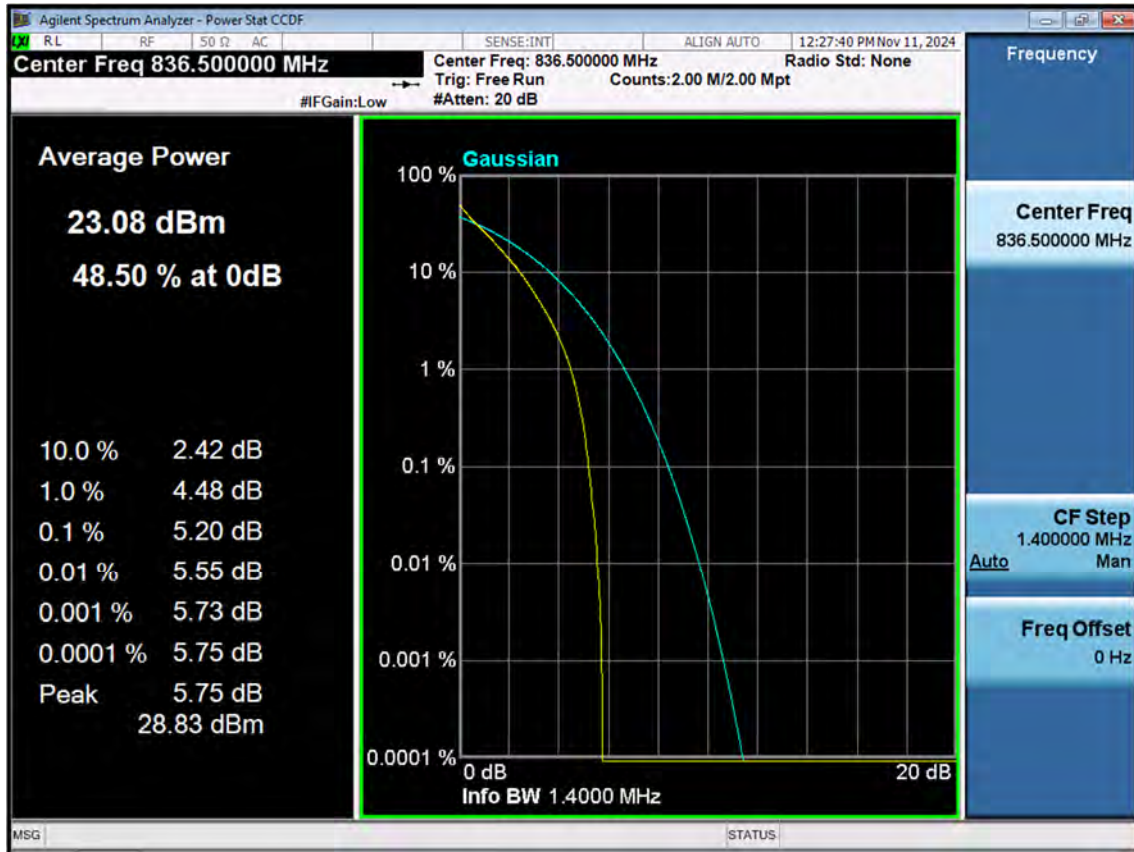


LTE B5_1.4M_PAR_Mid_16QAM_FullRB

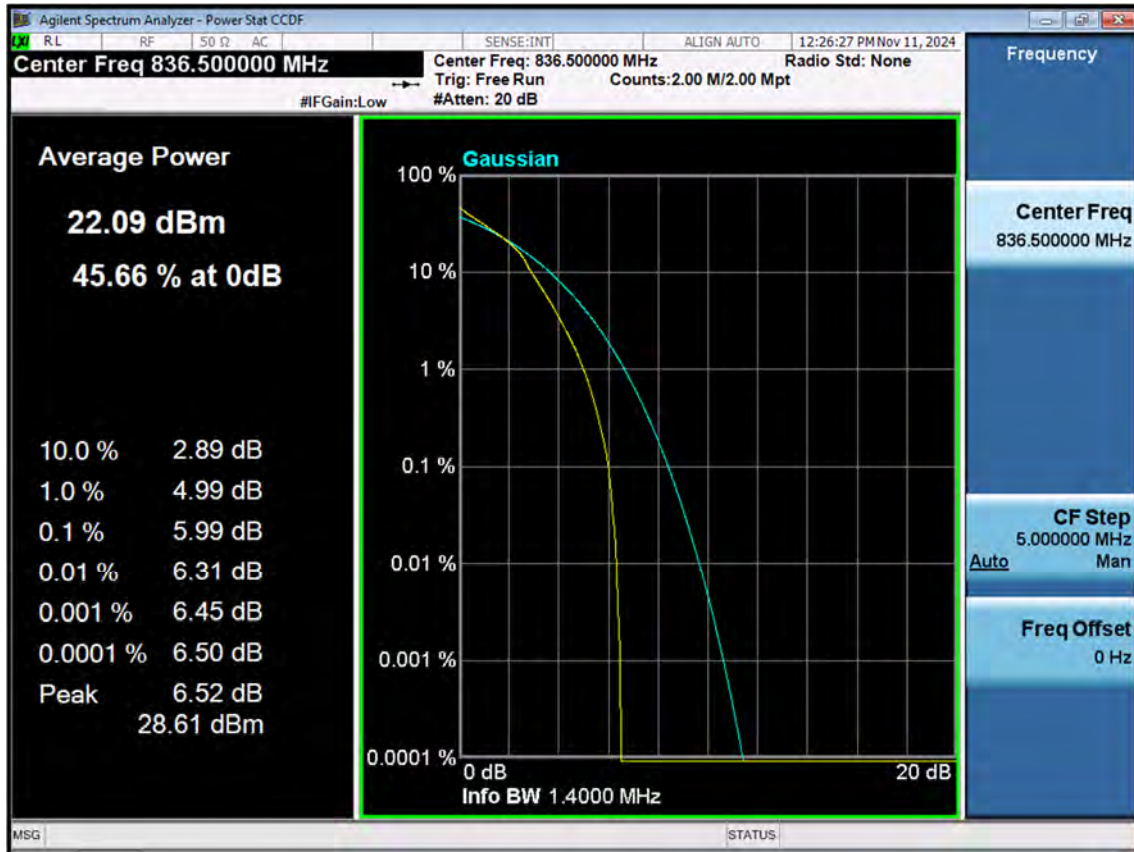


LTE B5_1.4M_PAR_Mid_64QAM_FullRB

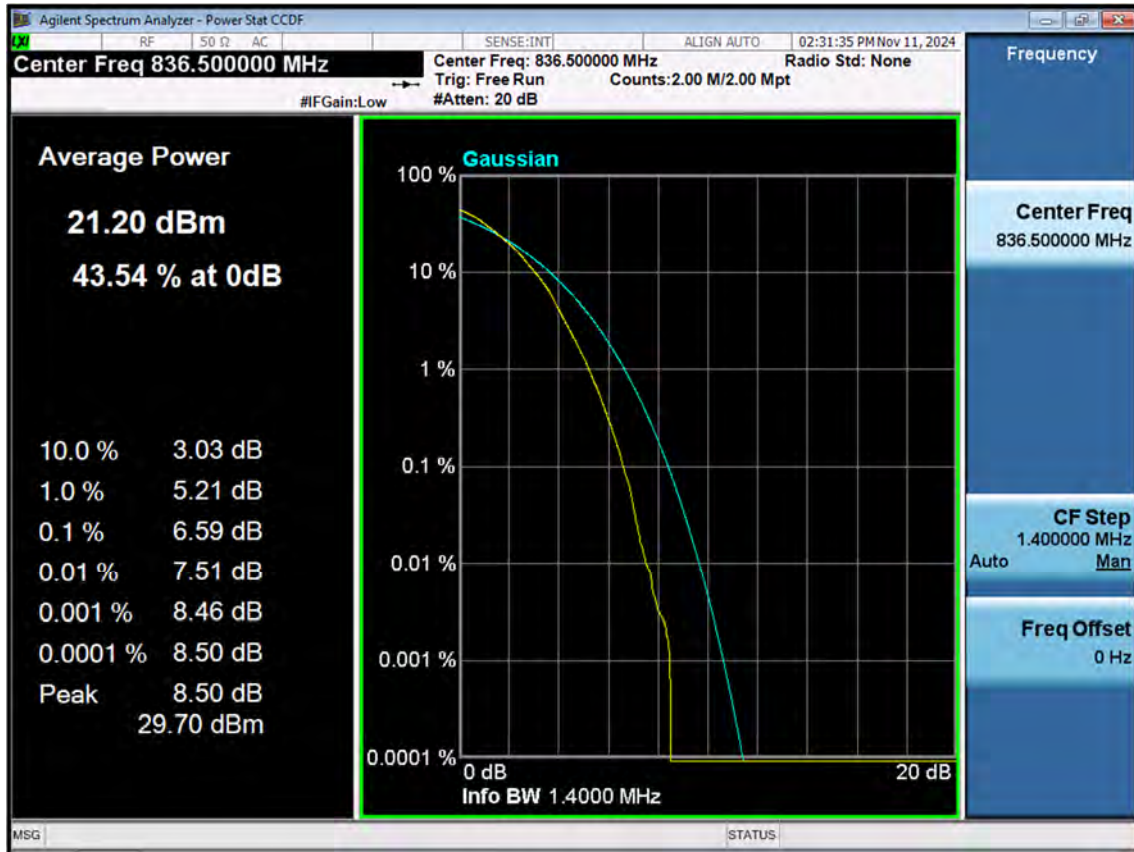


LTE B5_1.4M_PAR_Mid_256QAM_FullRB

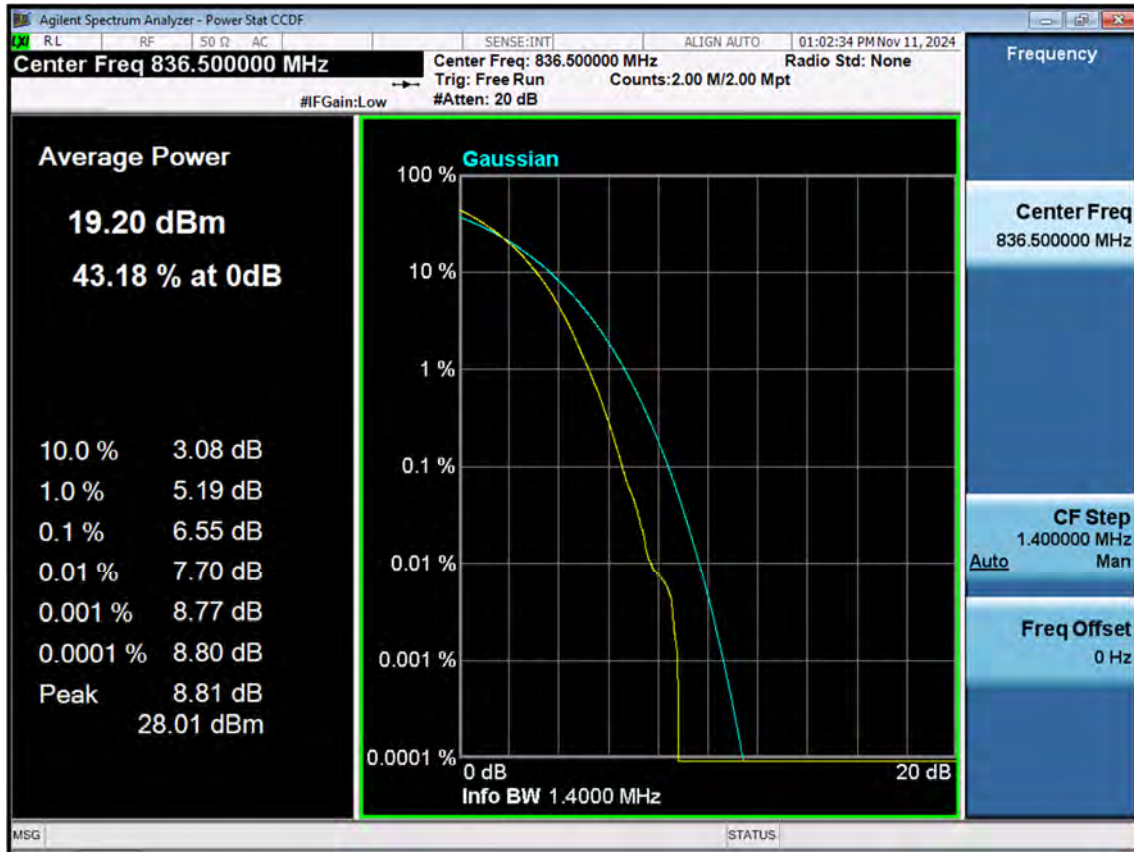


LTE B5_3 M_PAR_Mid_QPSK_FullRB

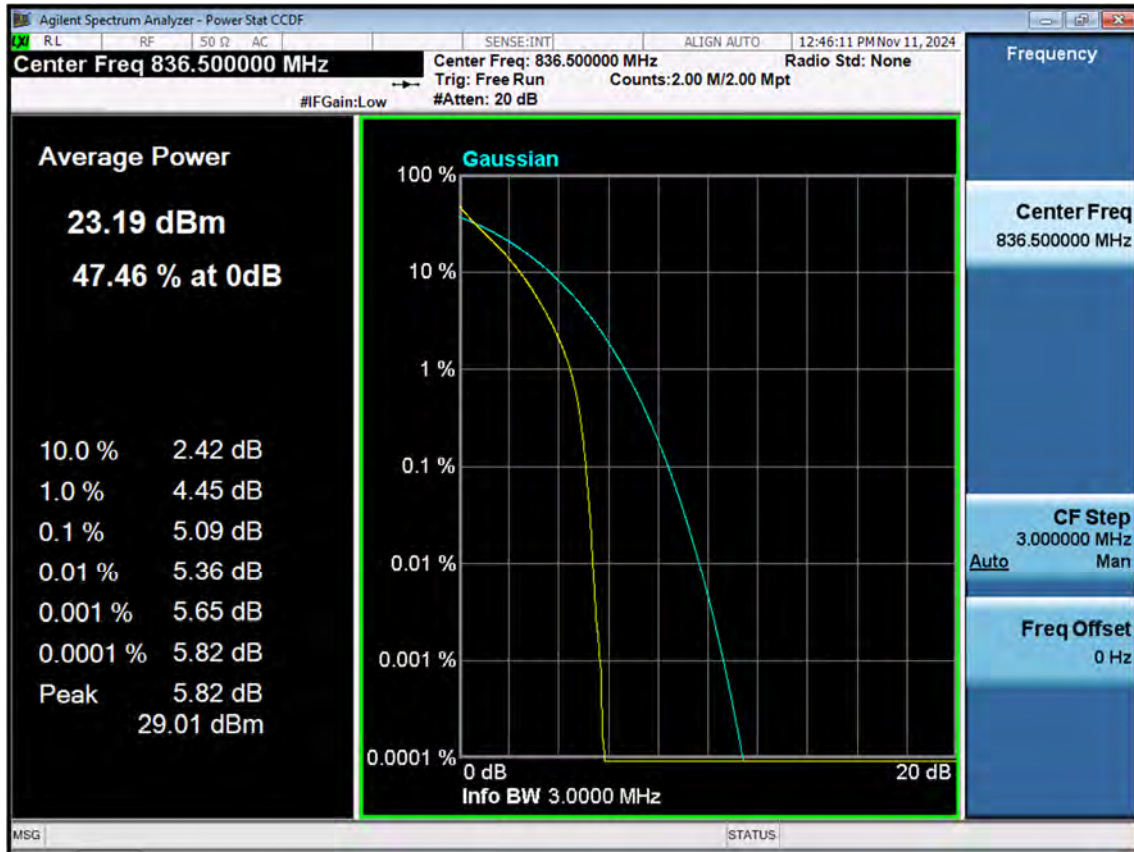


LTE B5_3 M_PAR_Mid_16QAM_FullRB

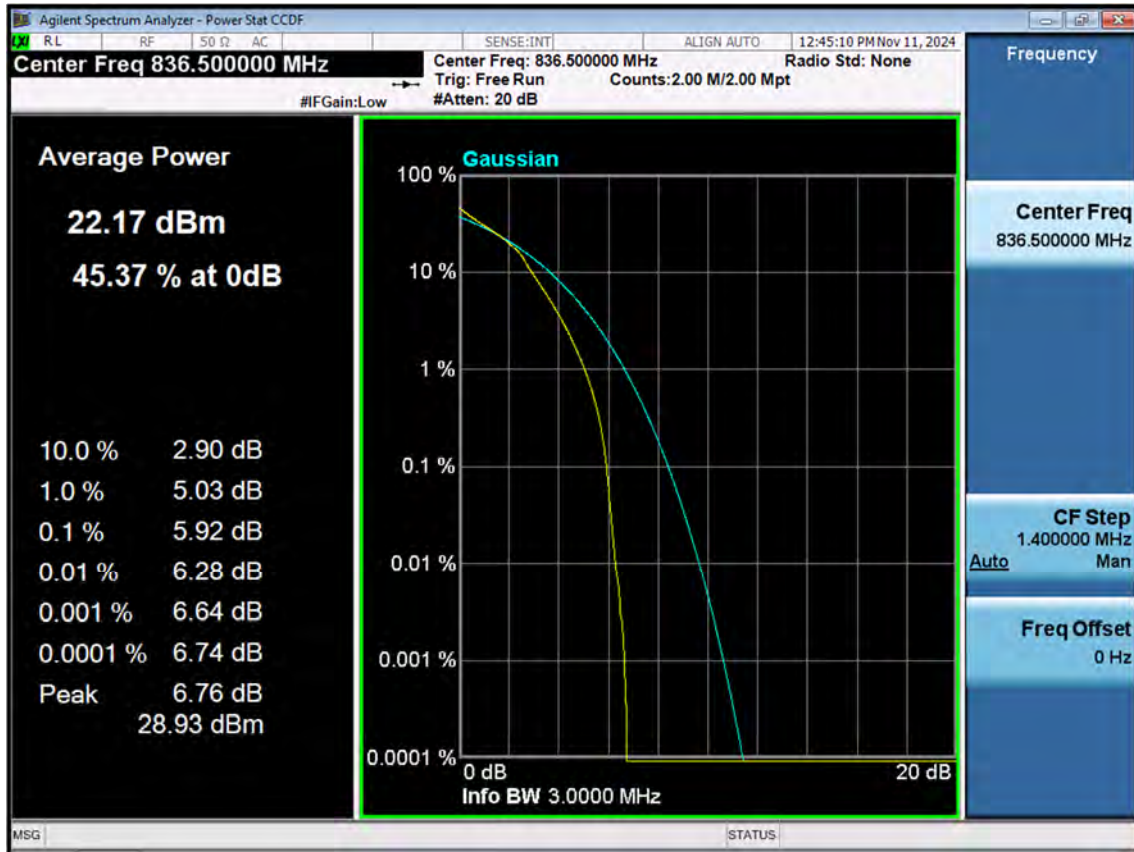


LTE B5_3 M_PAR_Mid_64QAM_FullRB

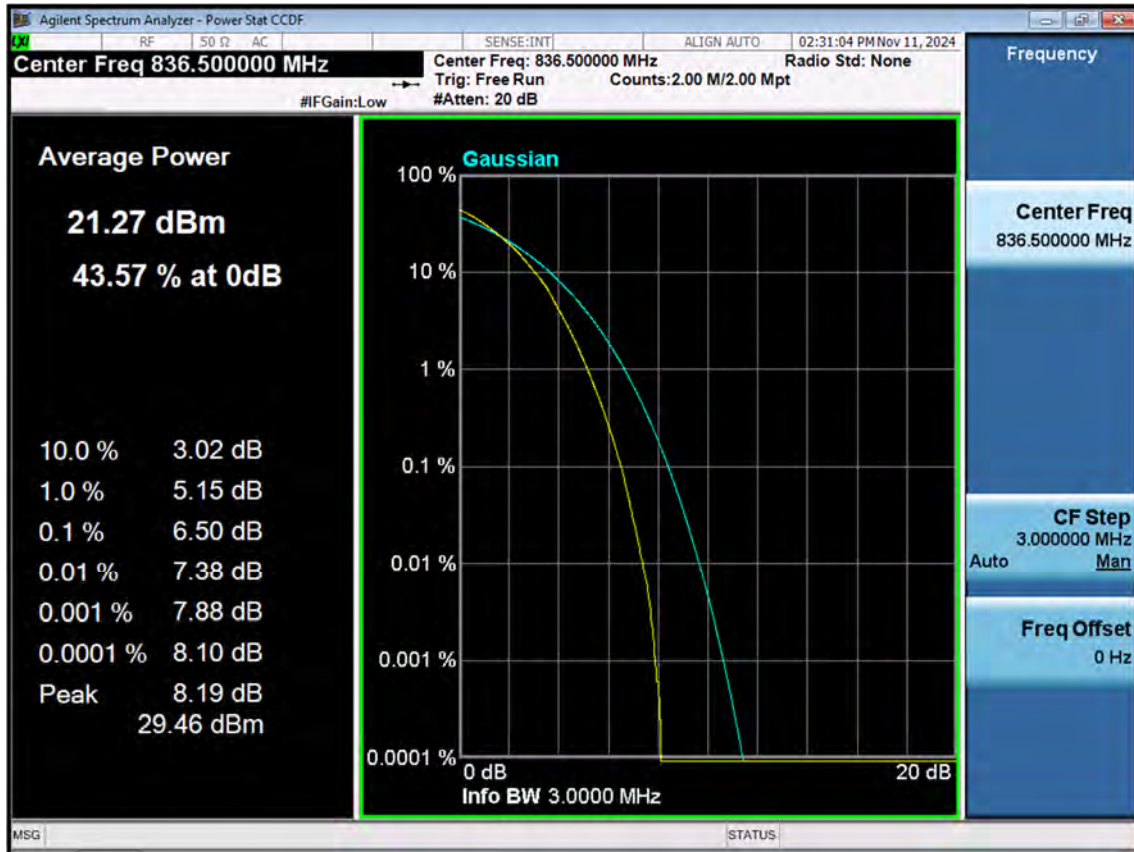


LTE B5_3 M_PAR_Mid_256QAM_FullRB

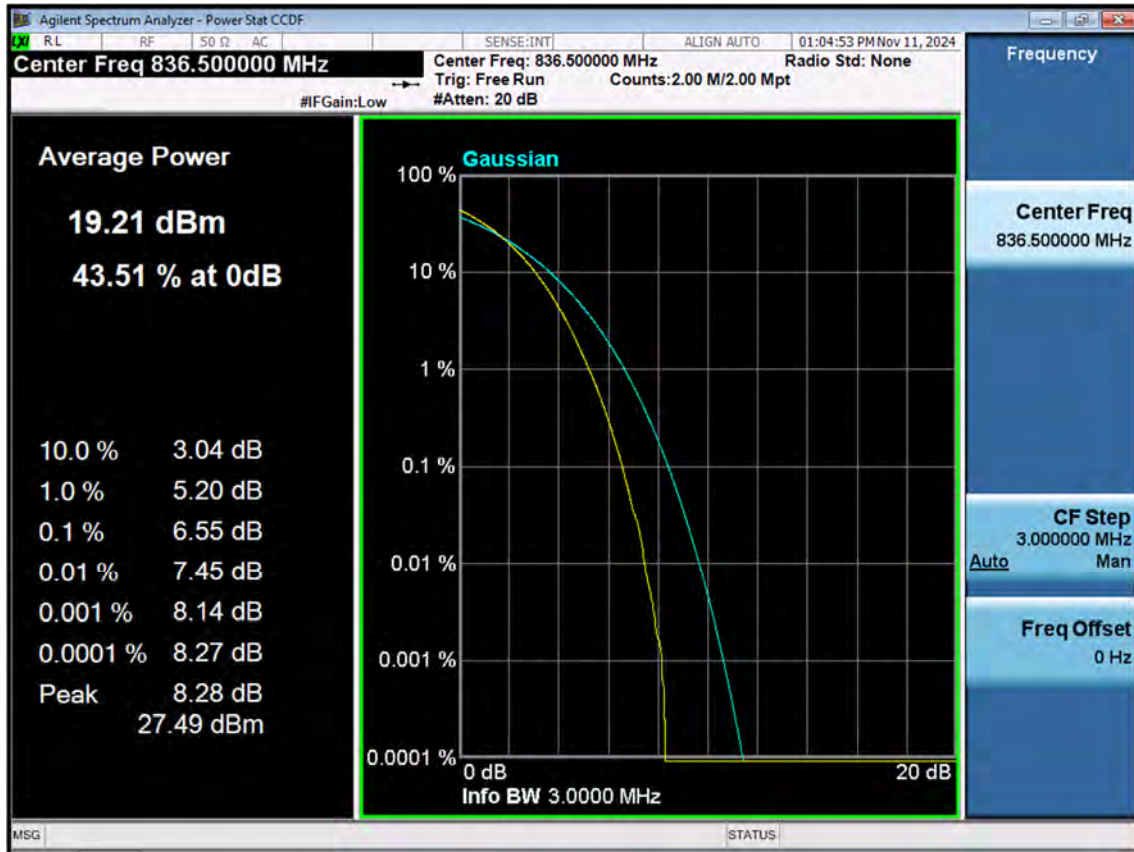


LTE B5_5 M_PAR_Mid_QPSK_FullRB

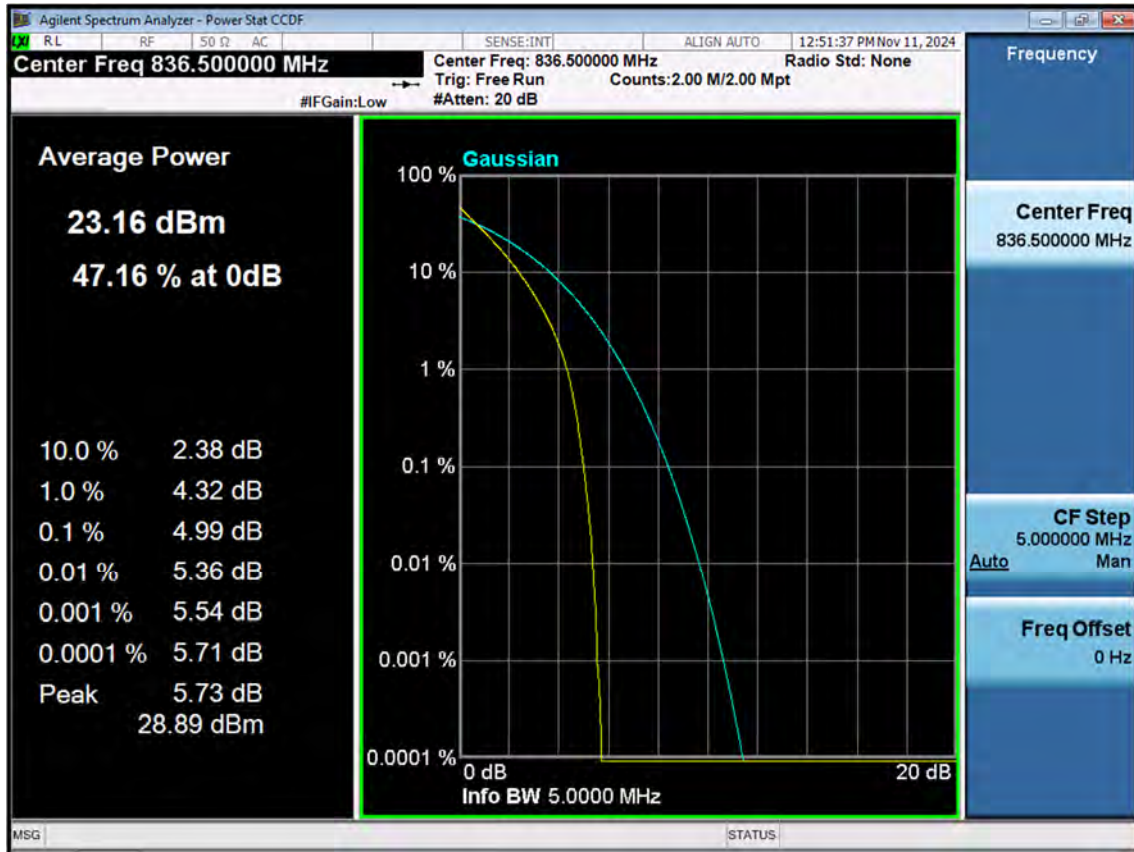


LTE B5_5 M_PAR_Mid_16QAM_FullRB

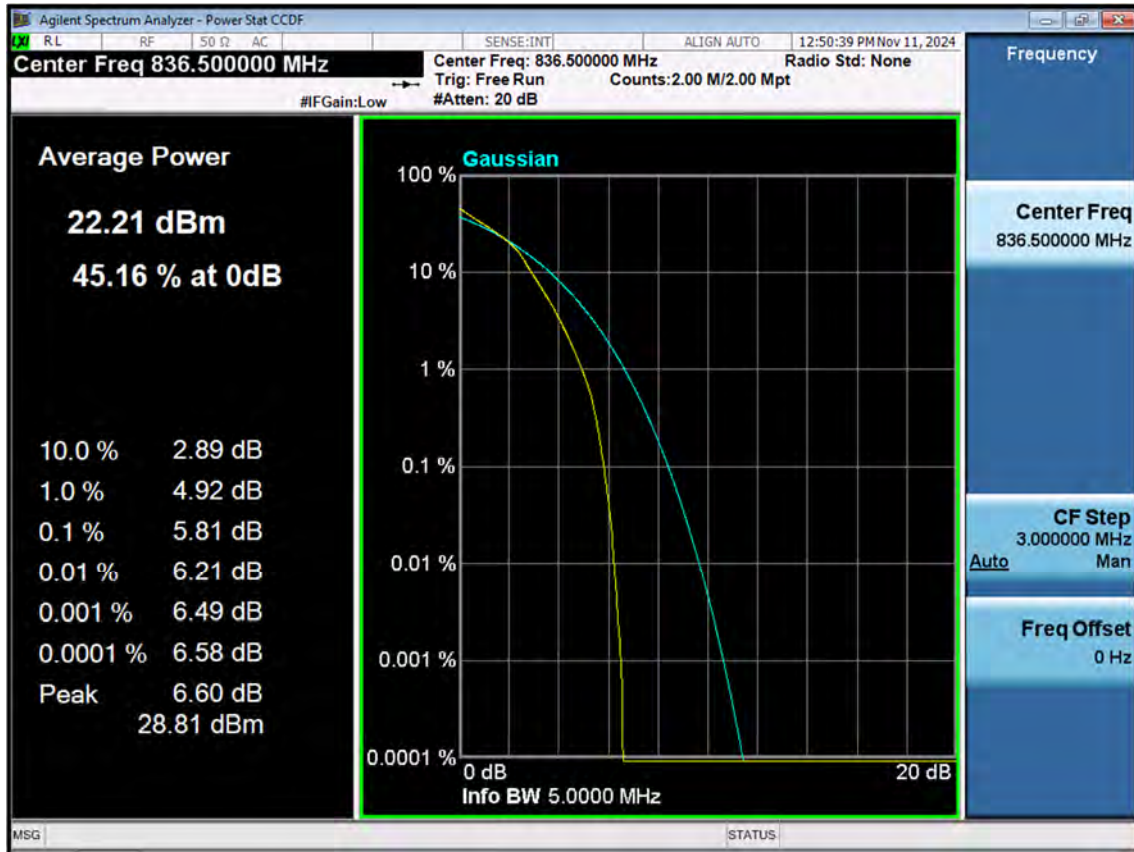


LTE B5_5 M_PAR_Mid_64QAM_FullRB

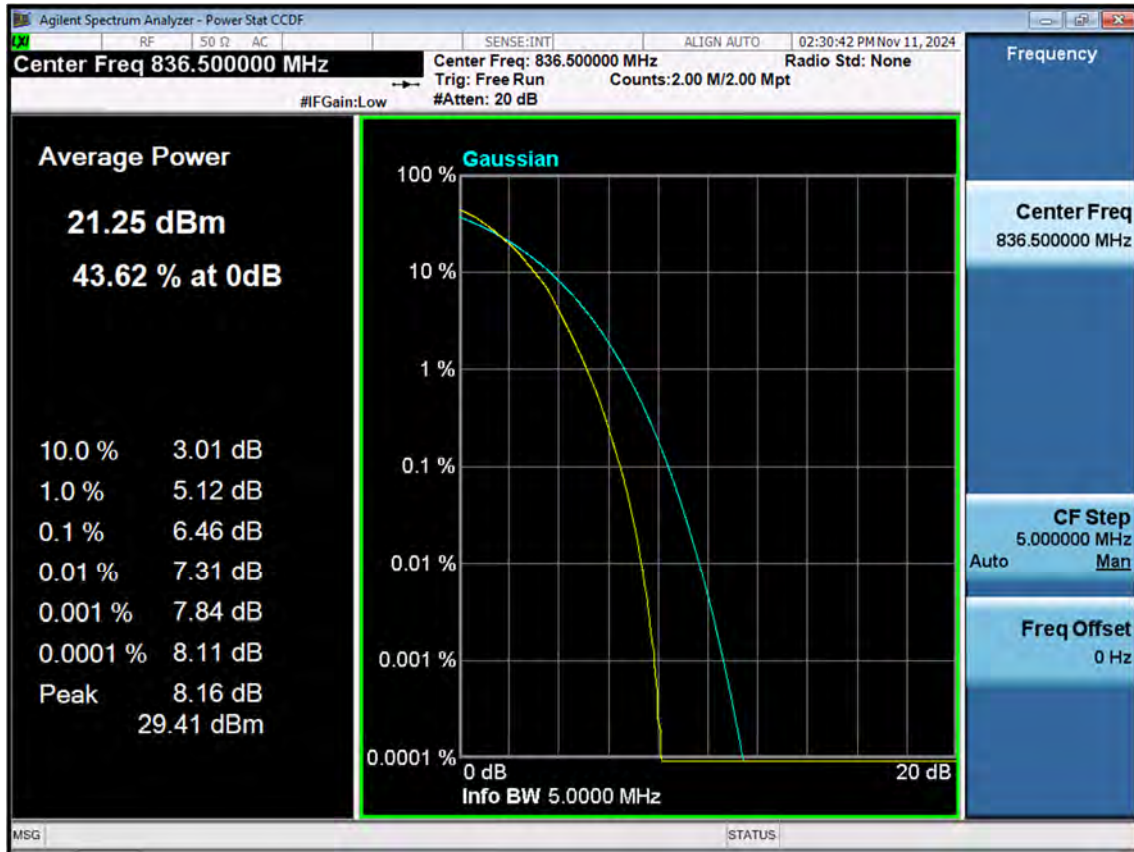


LTE B5_5 M_PAR_Mid_256QAM_FullRB

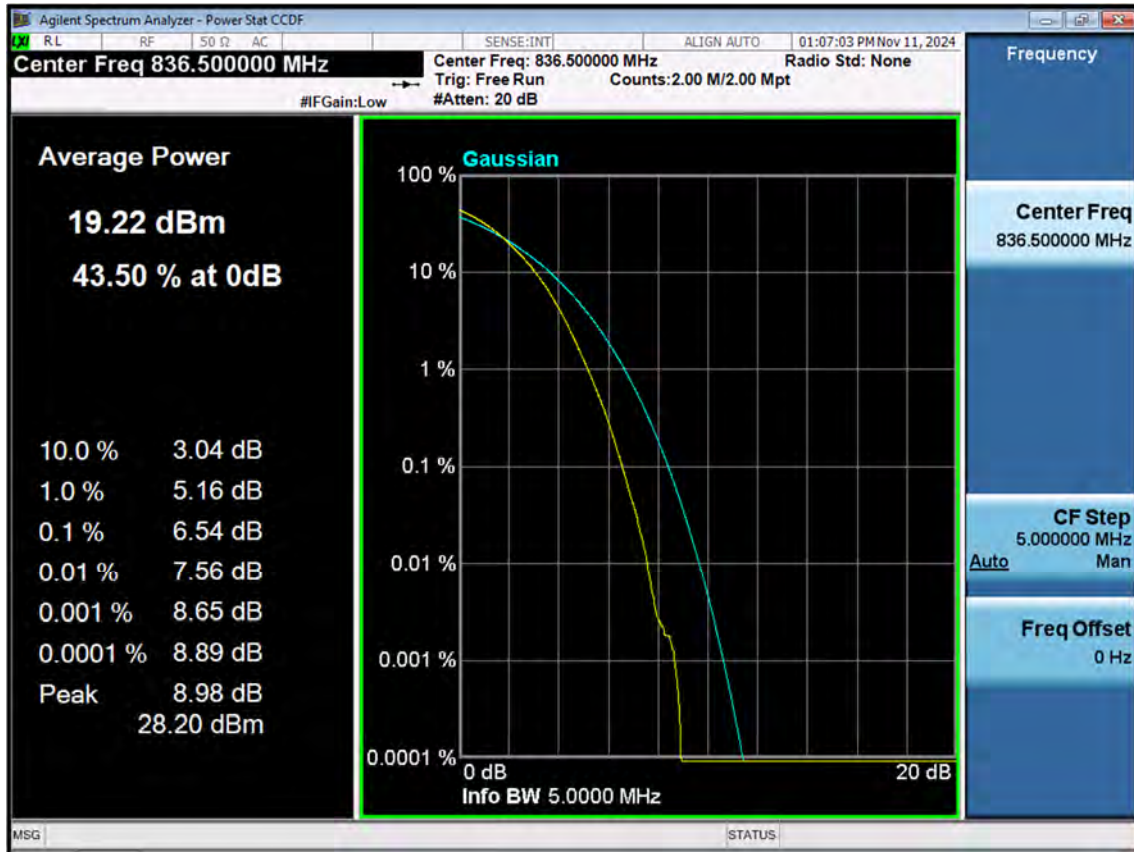


LTE B5_10 M_PAR_Mid_QPSK_FullRB

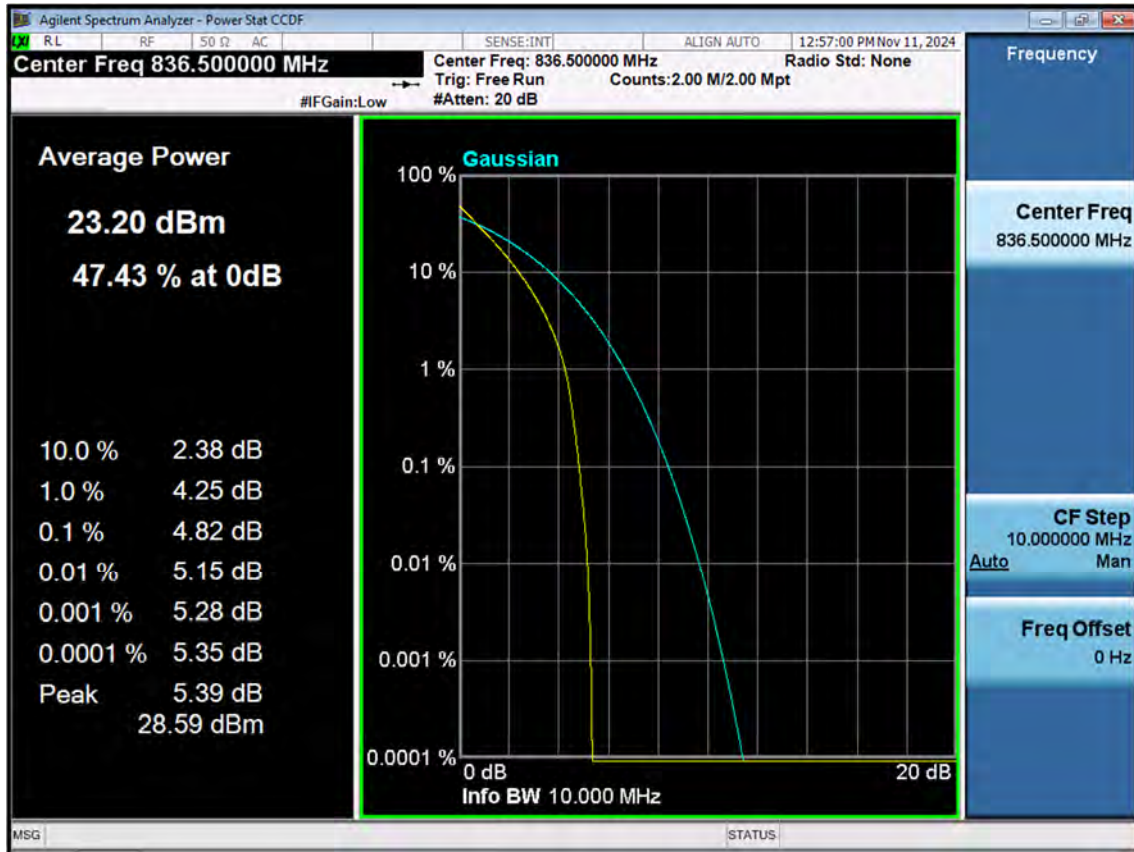


LTE B5_10 M_PAR_Mid_16QAM_FullRB

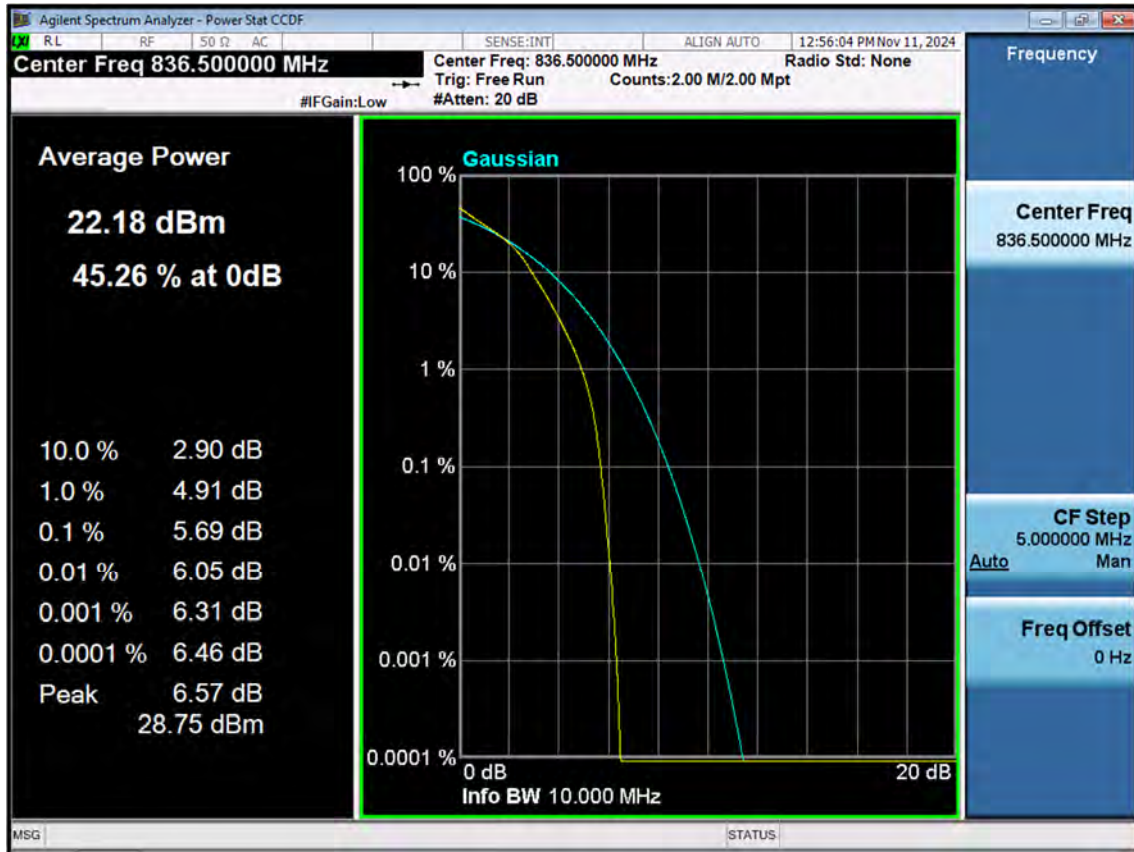


LTE B5_10 M_PAR_Mid_64QAM_FullRB

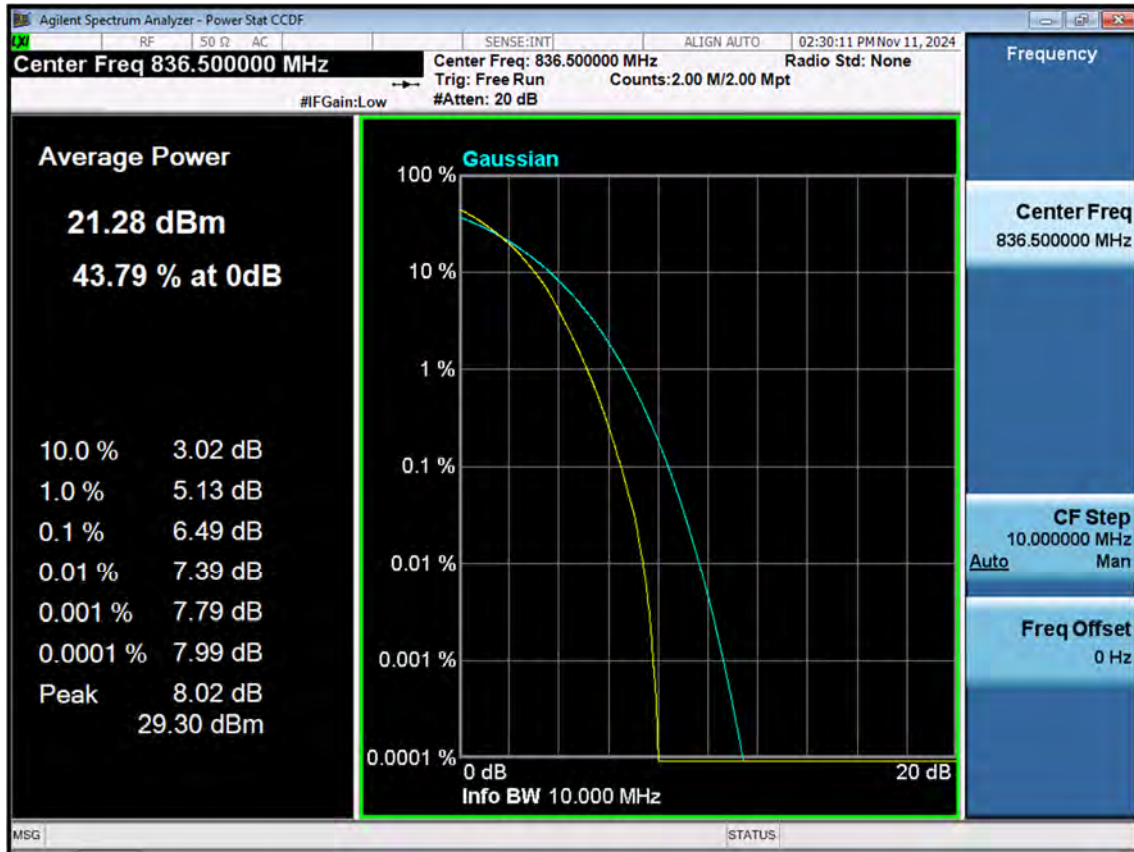


LTE B5_10 M_PAR_Mid_256QAM_FullRB

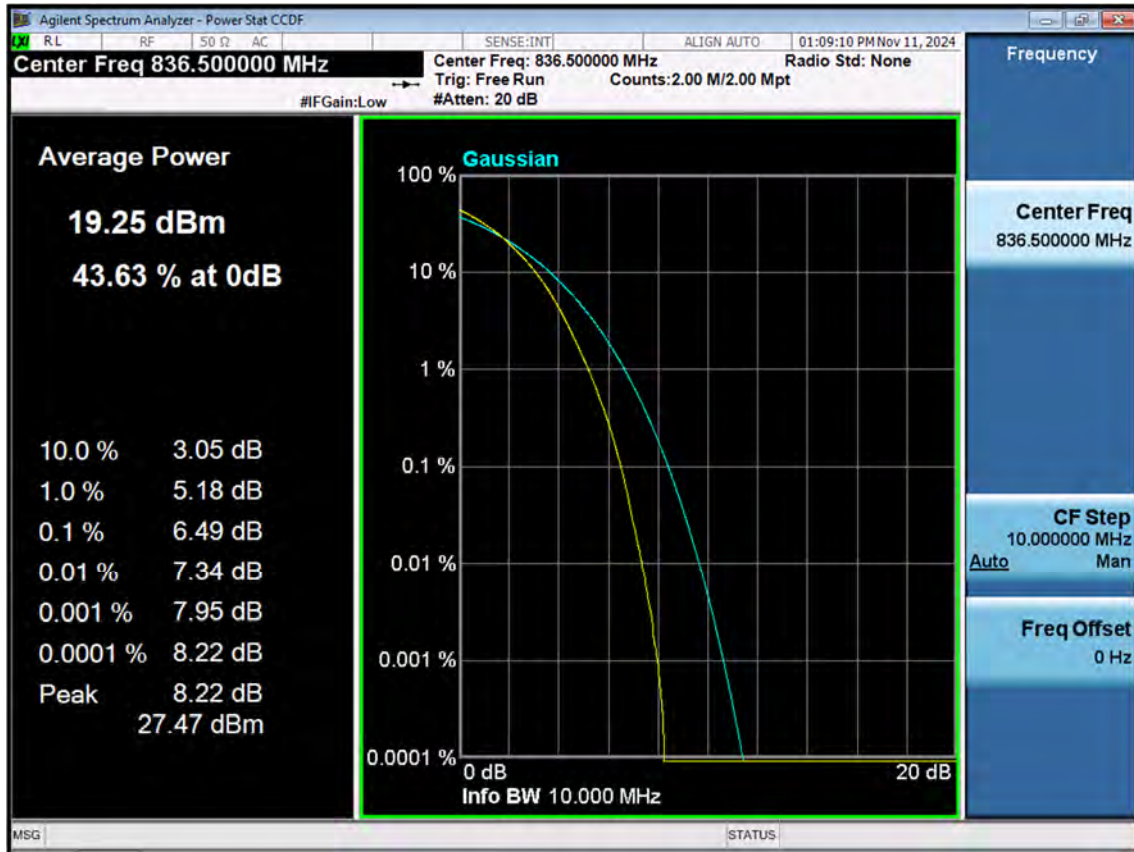


LTE B5_1.4M_OBW_Mid_QPSK_FullRB

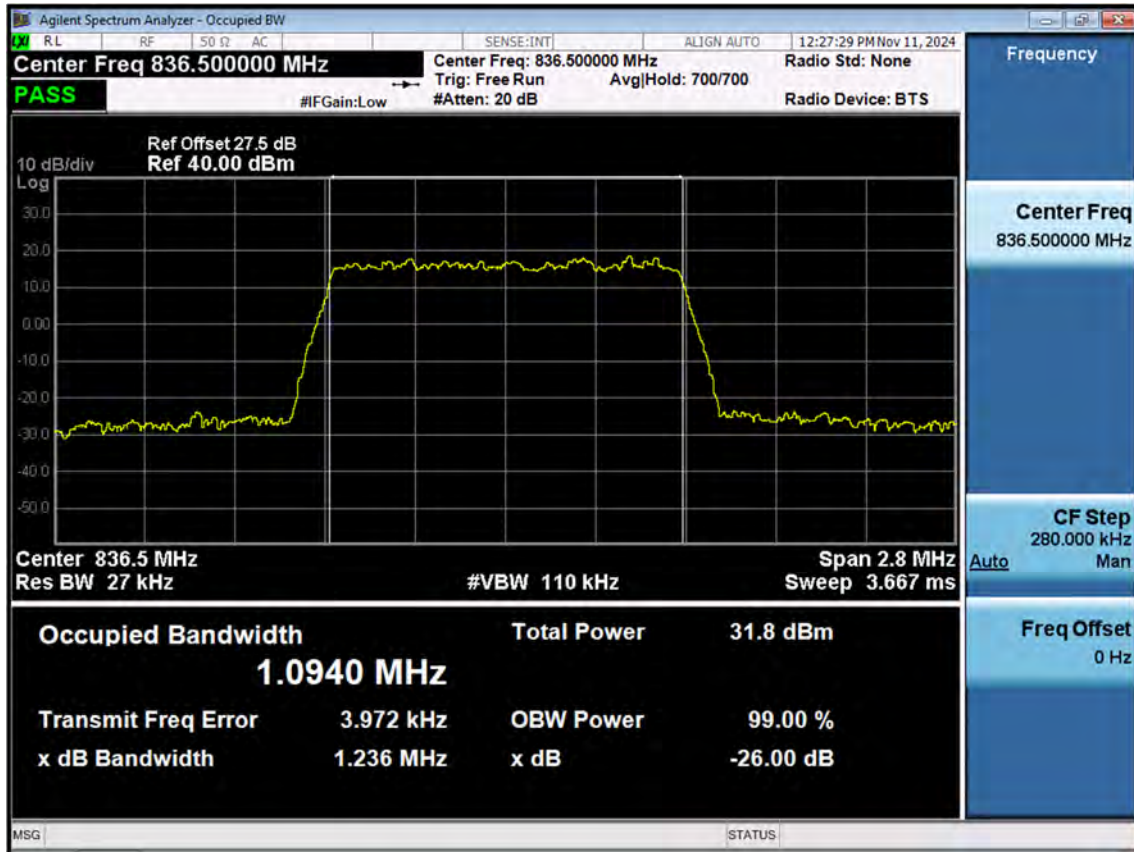


LTE B5_1.4M_OBW_Mid_16QAM_FullRB

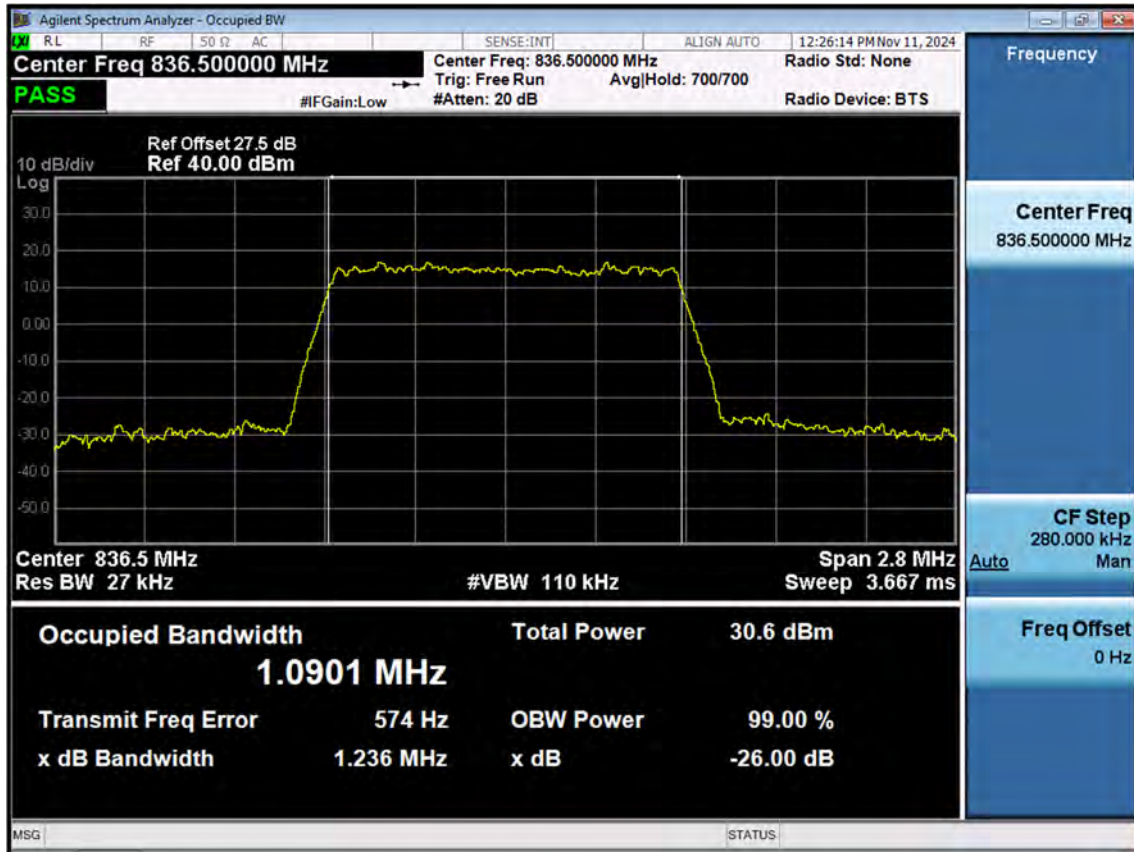


LTE B5_1.4M_OBW_Mid_64QAM_FullRB

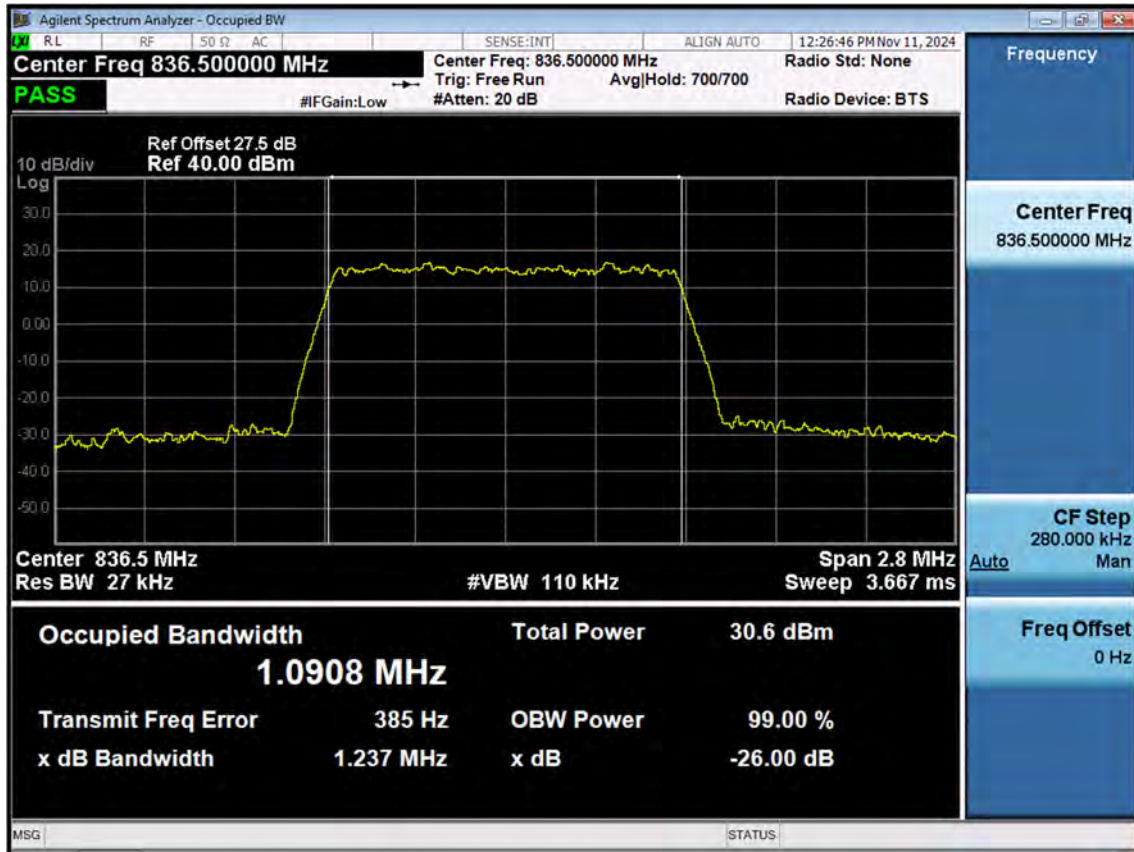


LTE B5_1.4M_OBW_Mid_256QAM_FullRB

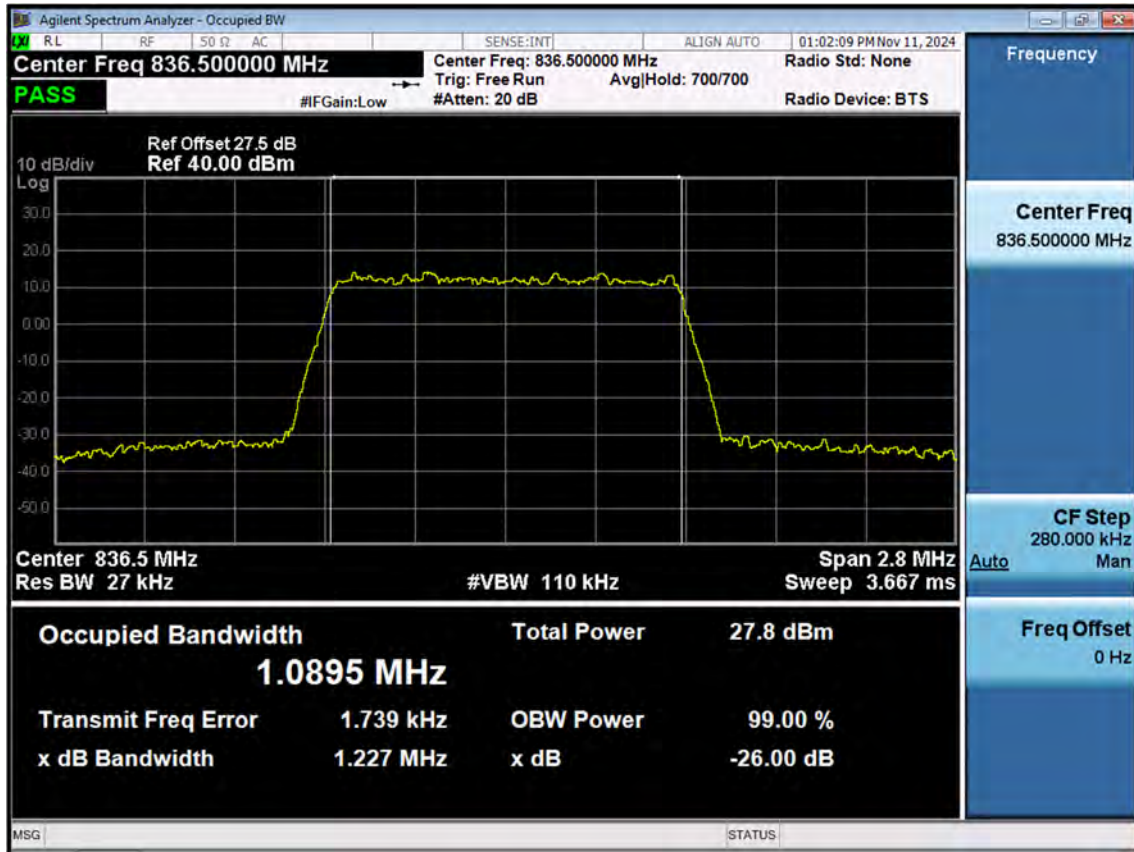


LTE B5_3 M_OBW_Mid_QPSK_FullRB

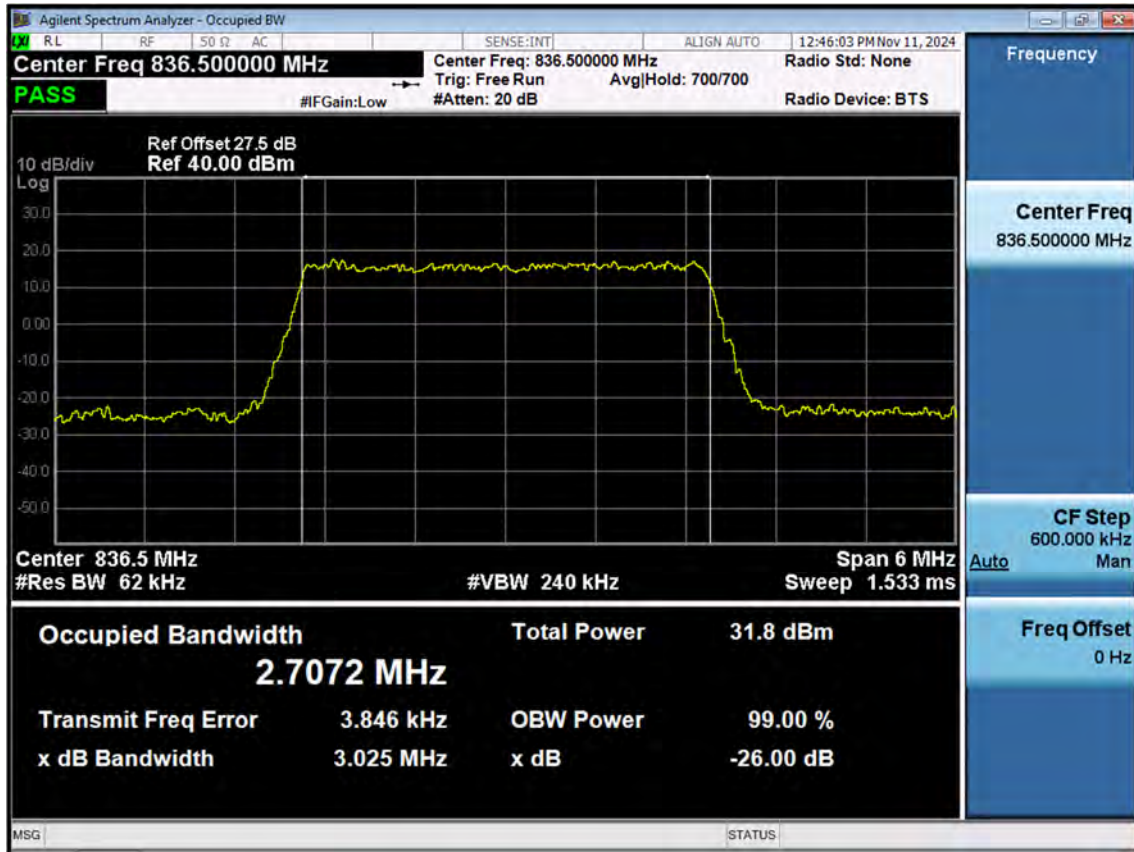


LTE B5_3 M_OBW_Mid_16QAM_FullRB

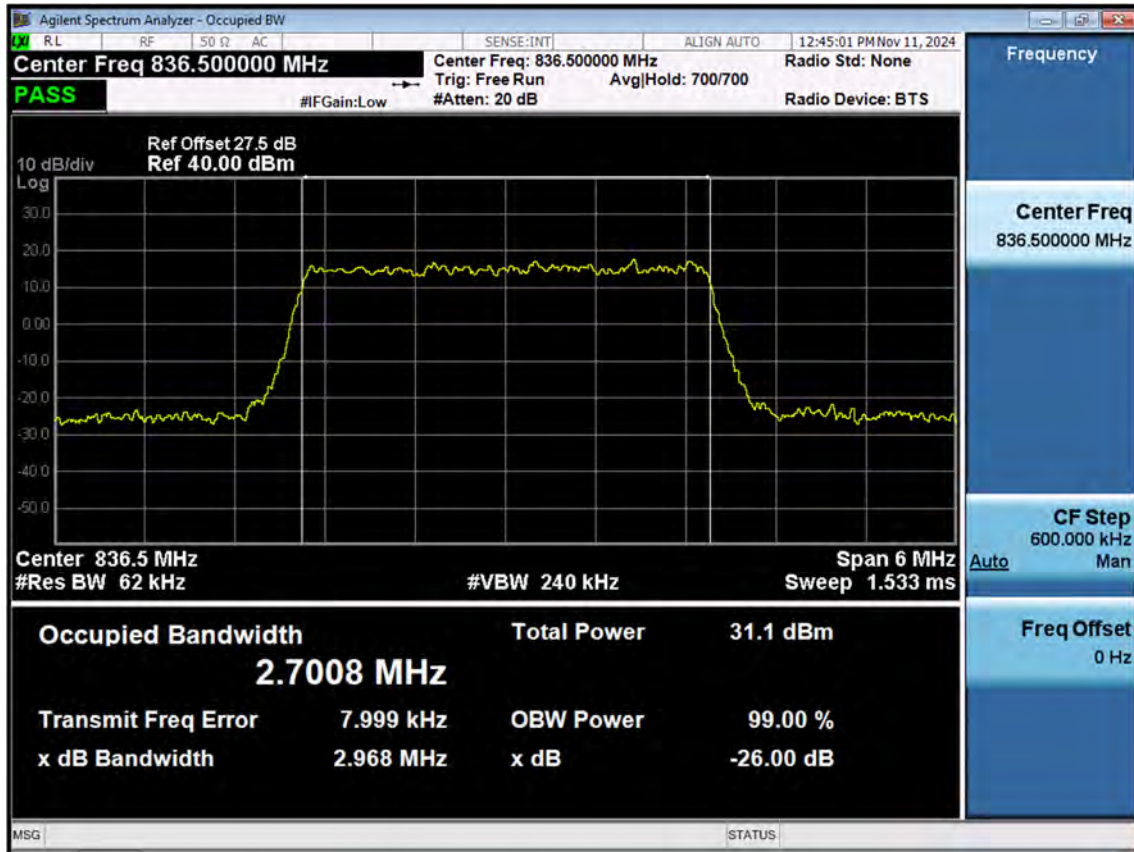


LTE B5_3 M_OBW_Mid_64QAM_FullRB

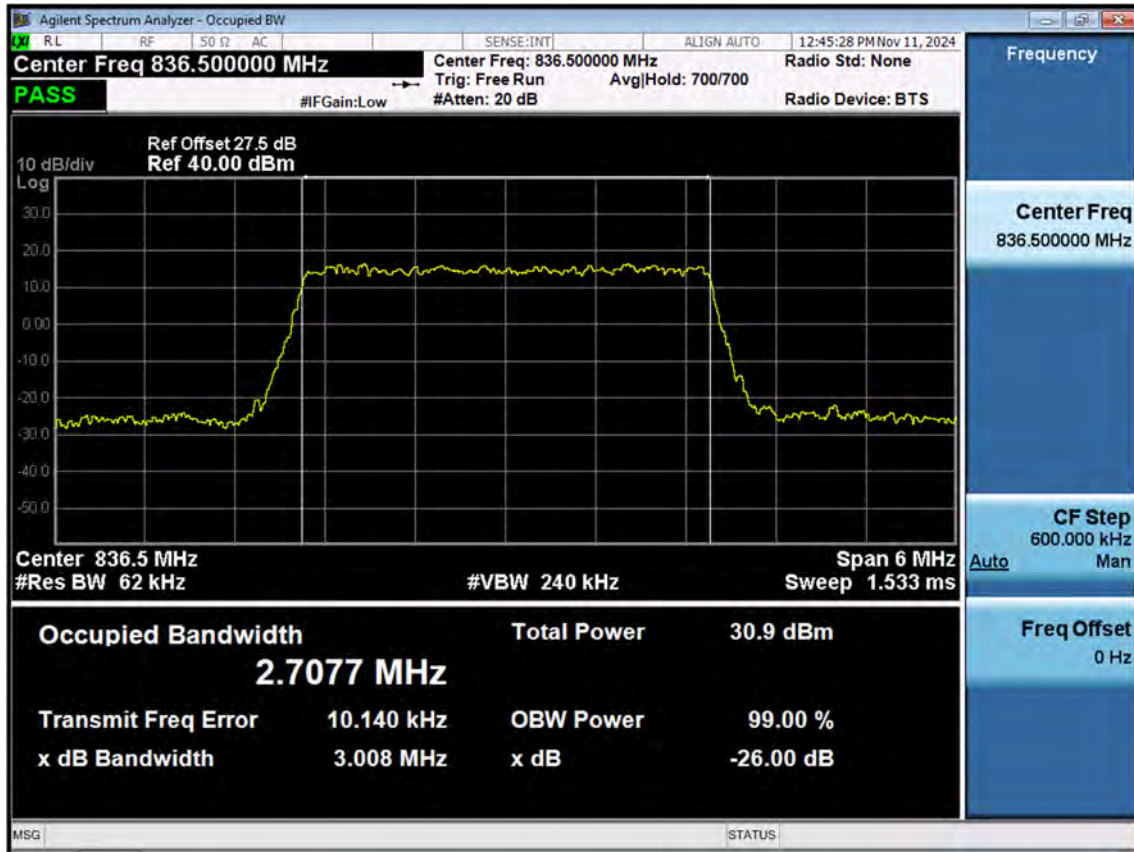


LTE B5_3 M_OBW_Mid_256QAM_FullRB

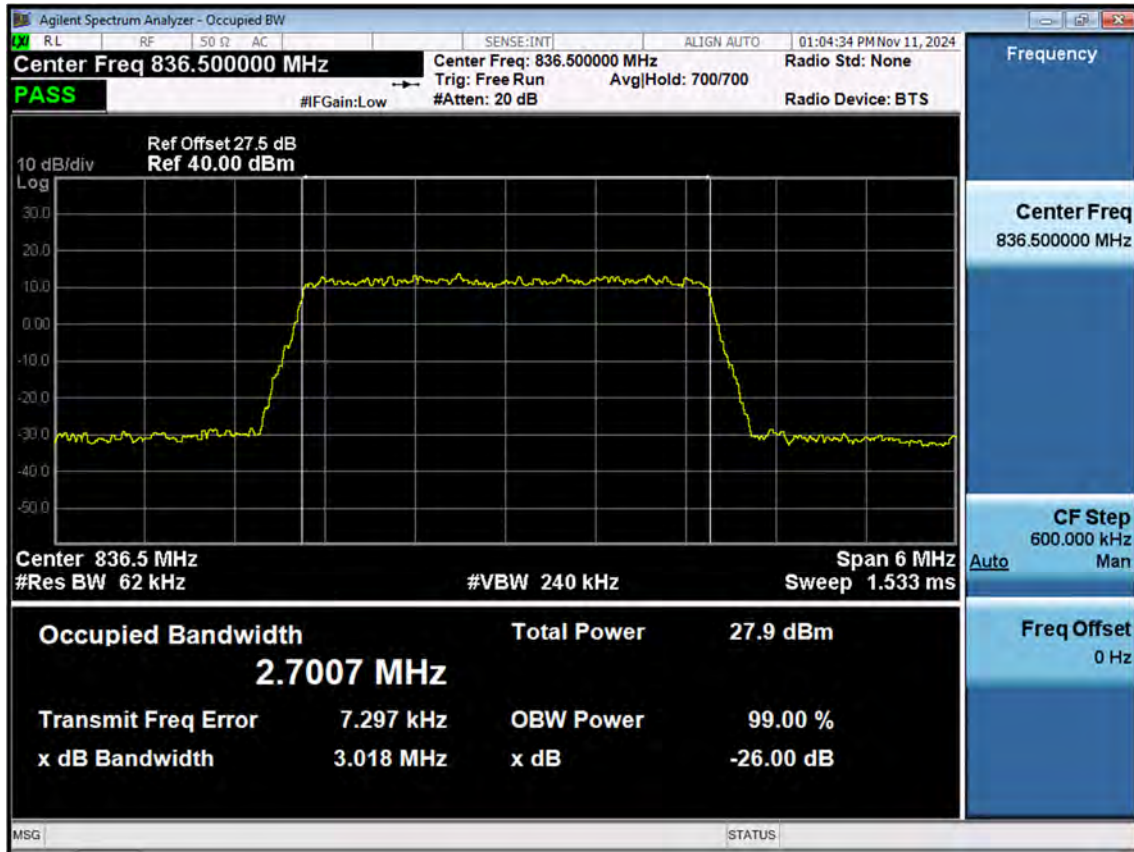


LTE B5_5 M_OBW_Mid_QPSK_FullRB

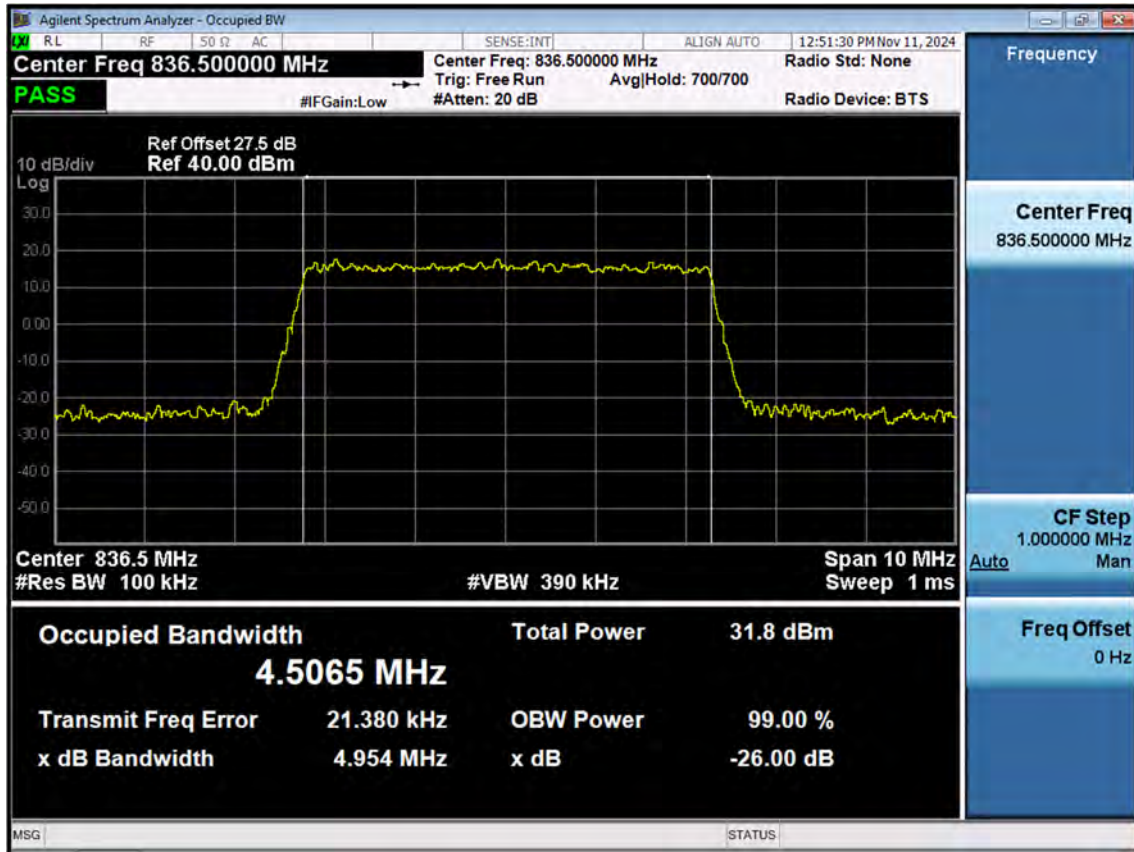


LTE B5_5 M_OBW_Mid_16QAM_FullRB

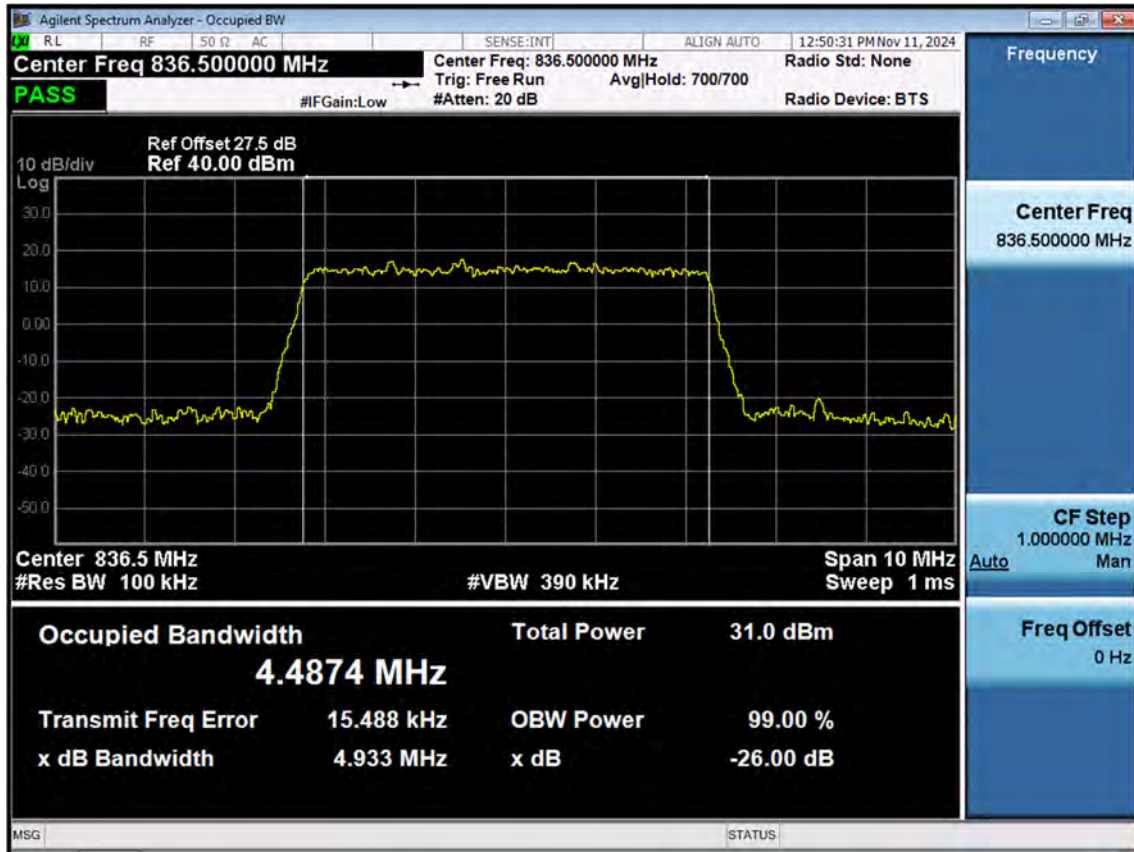


LTE B5_5 M_OBW_Mid_64QAM_FullRB

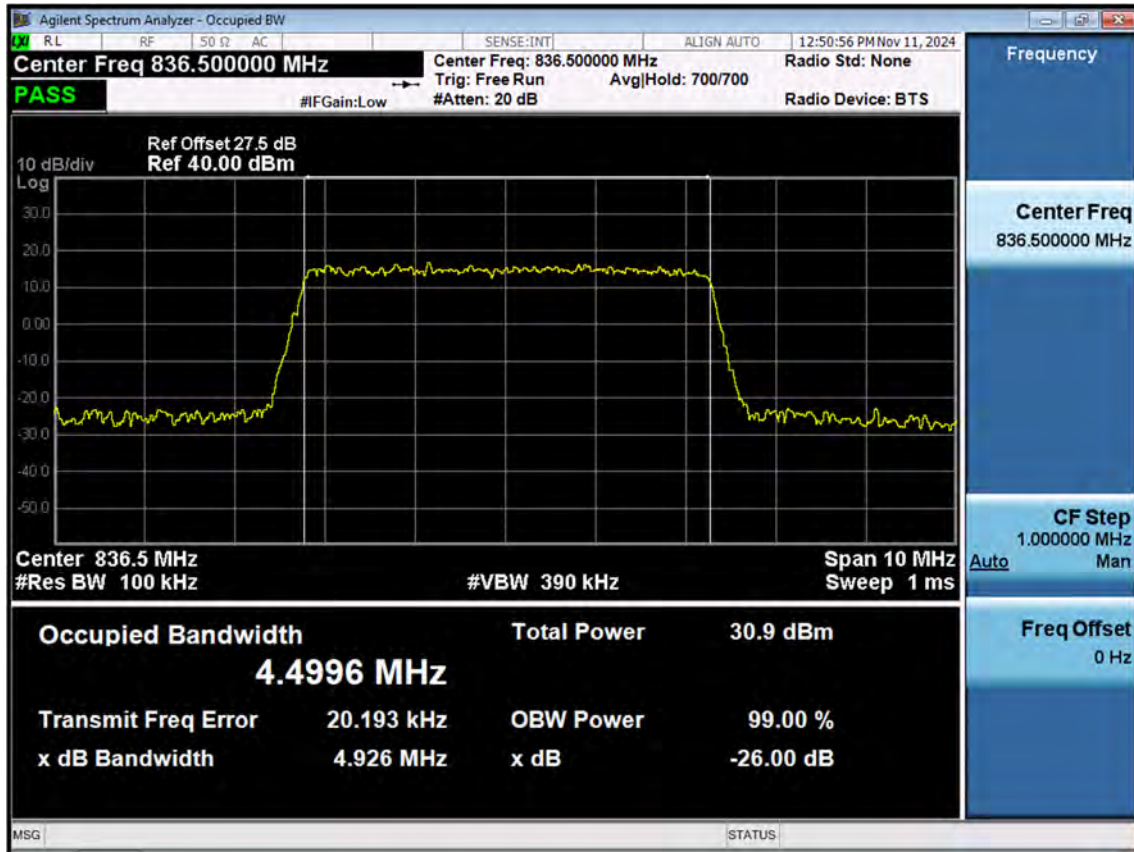


LTE B5_5 M_OBW_Mid_256QAM_FullRB

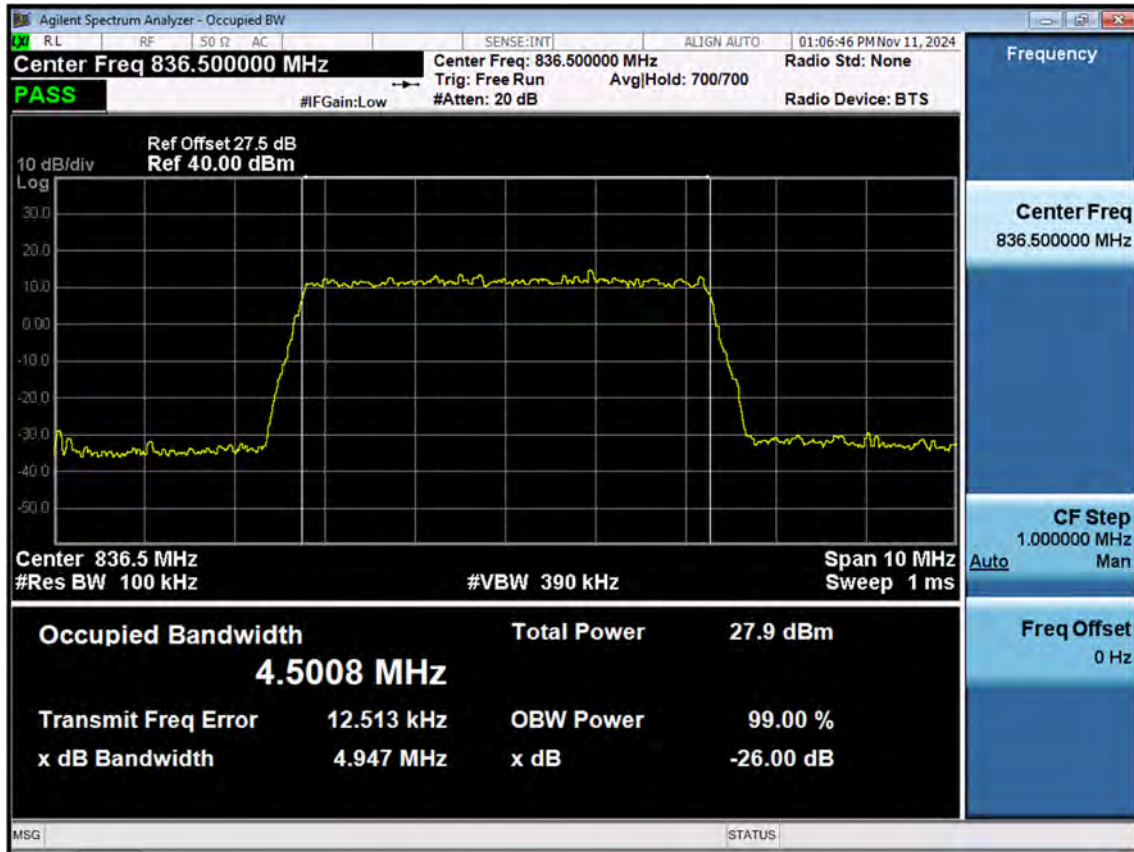


LTE B5_10 M_OBW_Mid_QPSK_FullRB

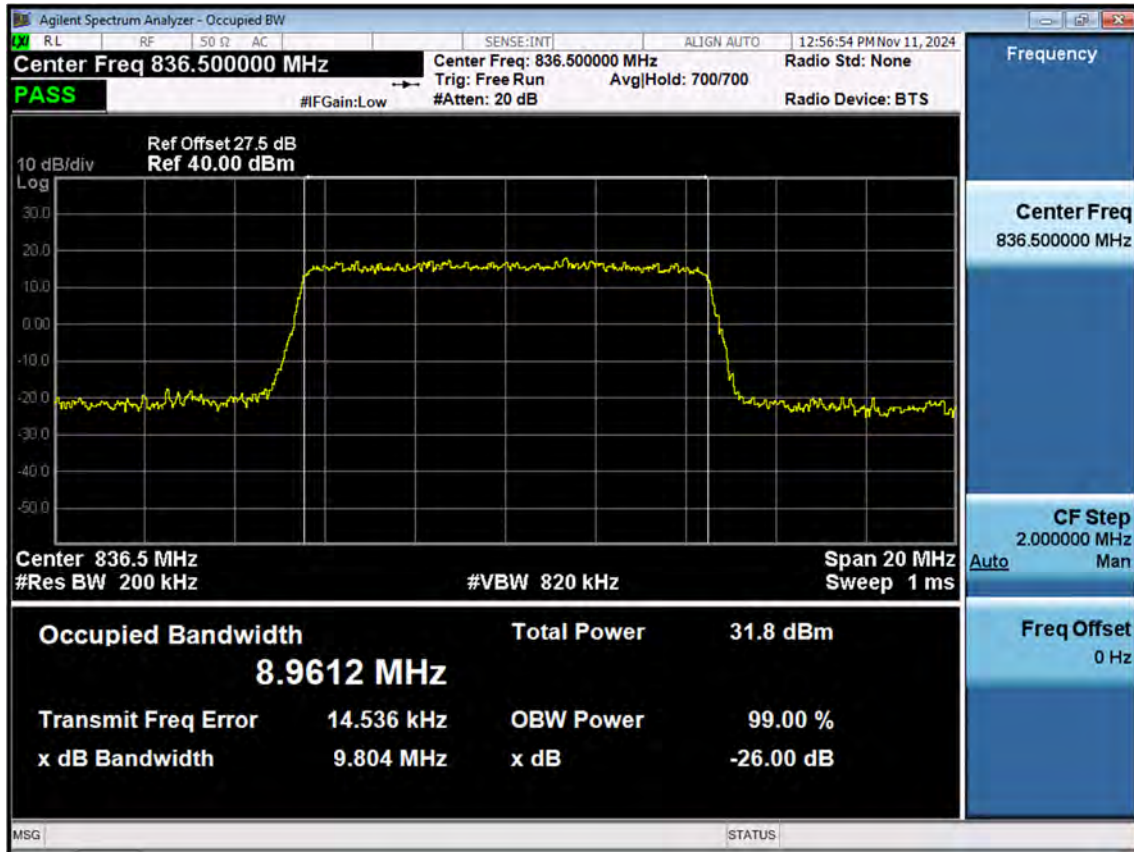


LTE B5_10 M_OBW_Mid_16QAM_FullRB

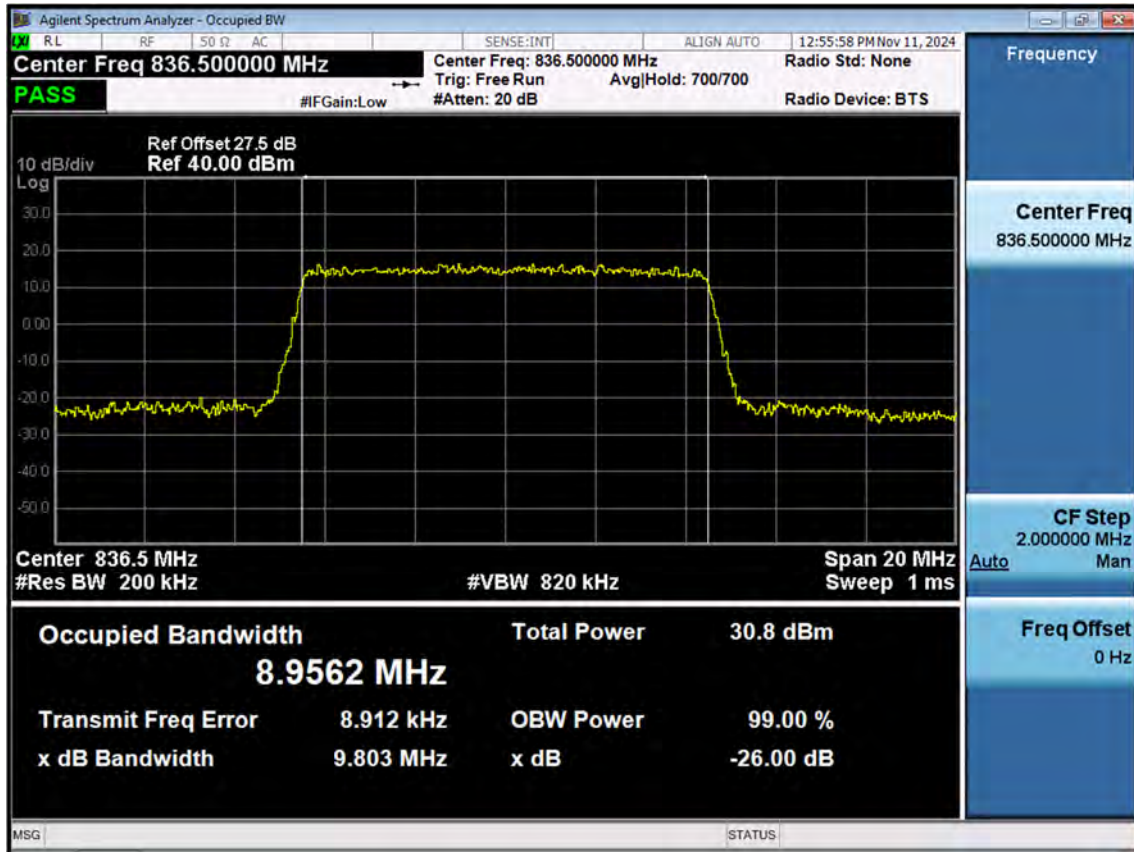


LTE B5_10 M_OBW_Mid_64QAM_FullRB

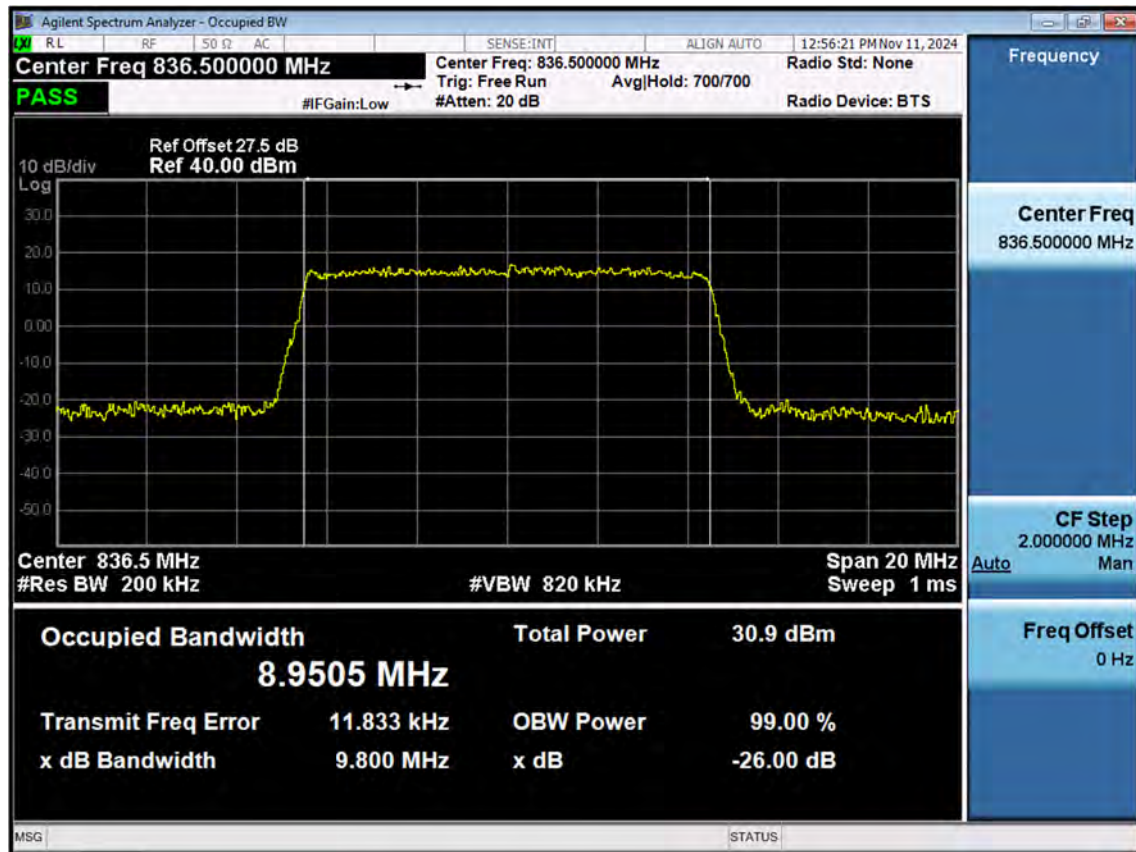


LTE B5_10 M_OBW_Mid_256QAM_FullRB

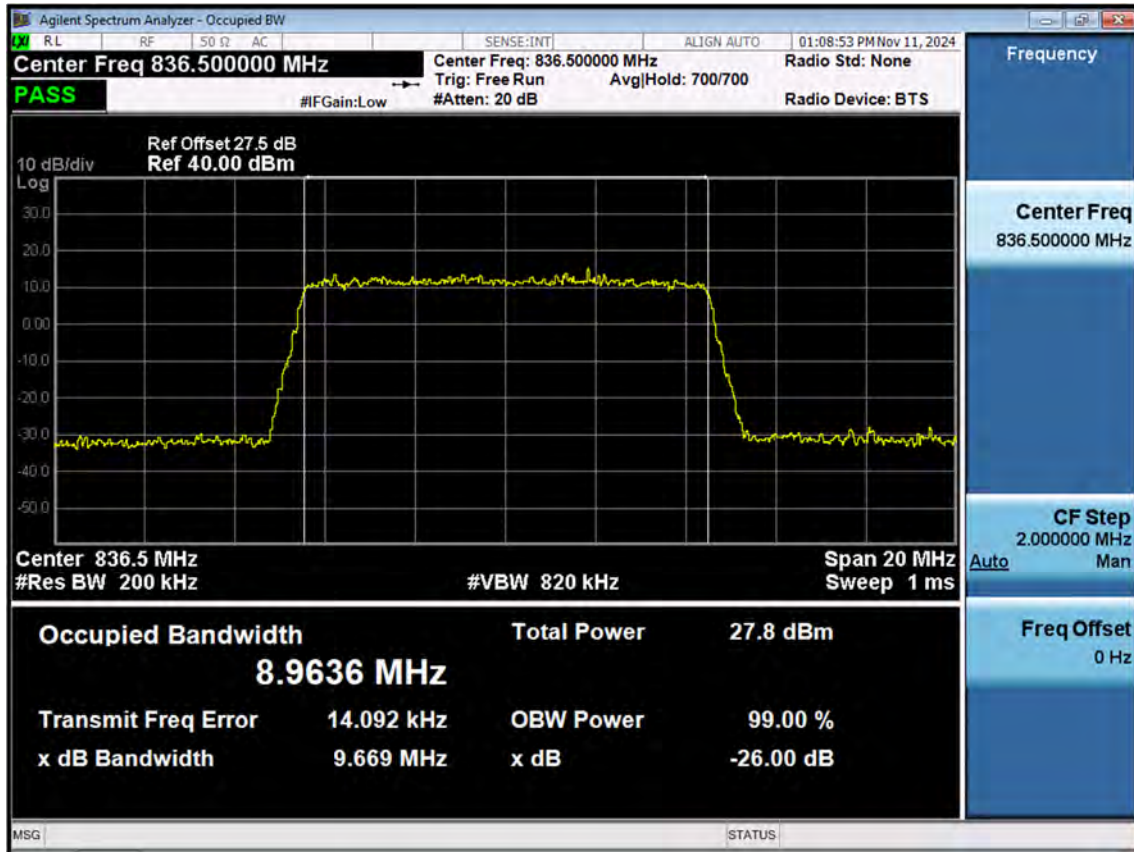


LTE B5_1.4M_Conducted Spurious(30 M-10 G)_Low_QPSK_1RB

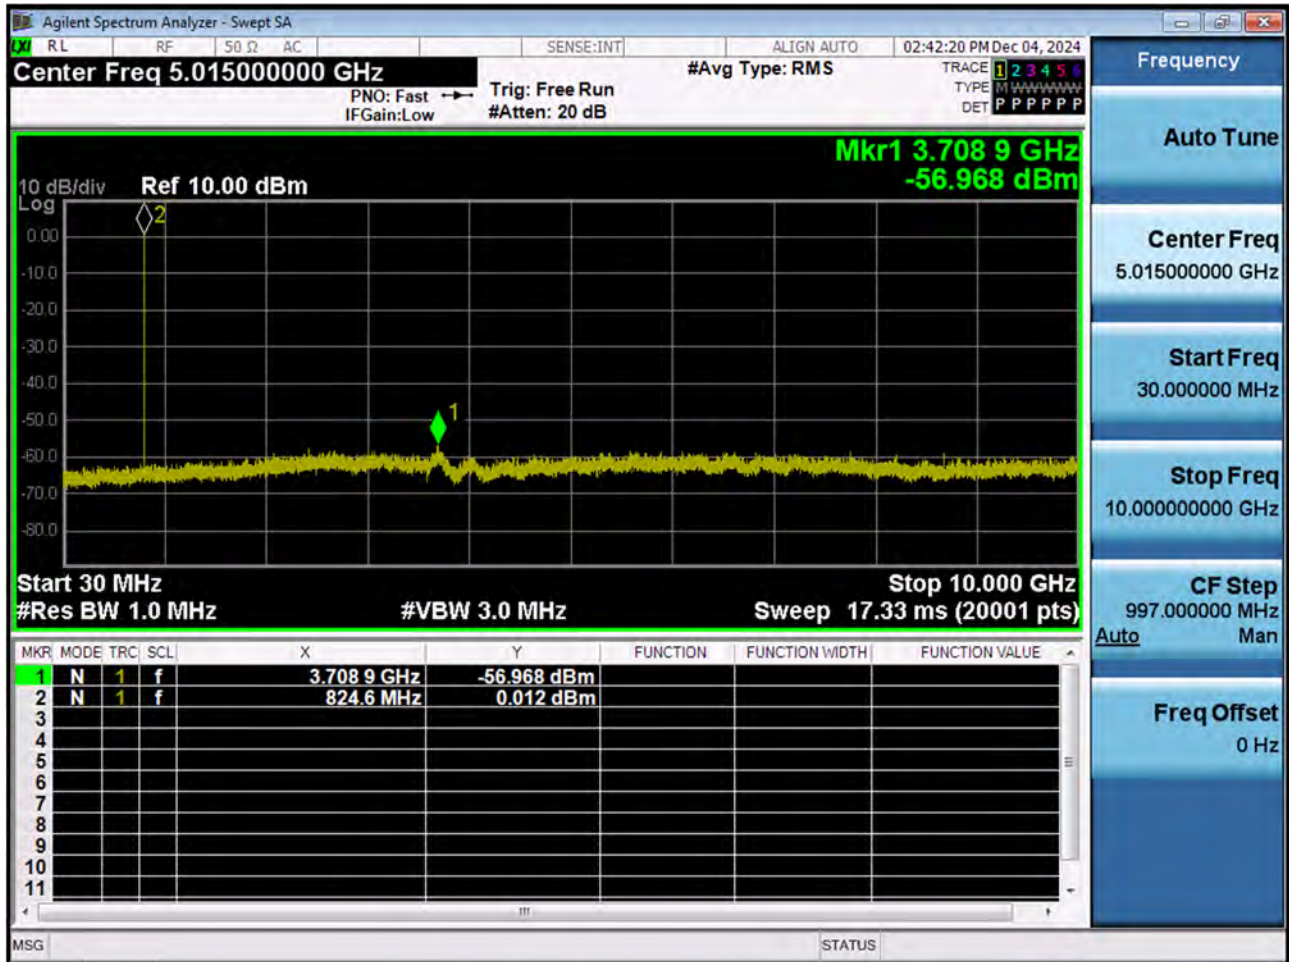


LTE B5_1.4M_Conducted Spurious(30 M-10 G)_Mid_QPSK_1RB

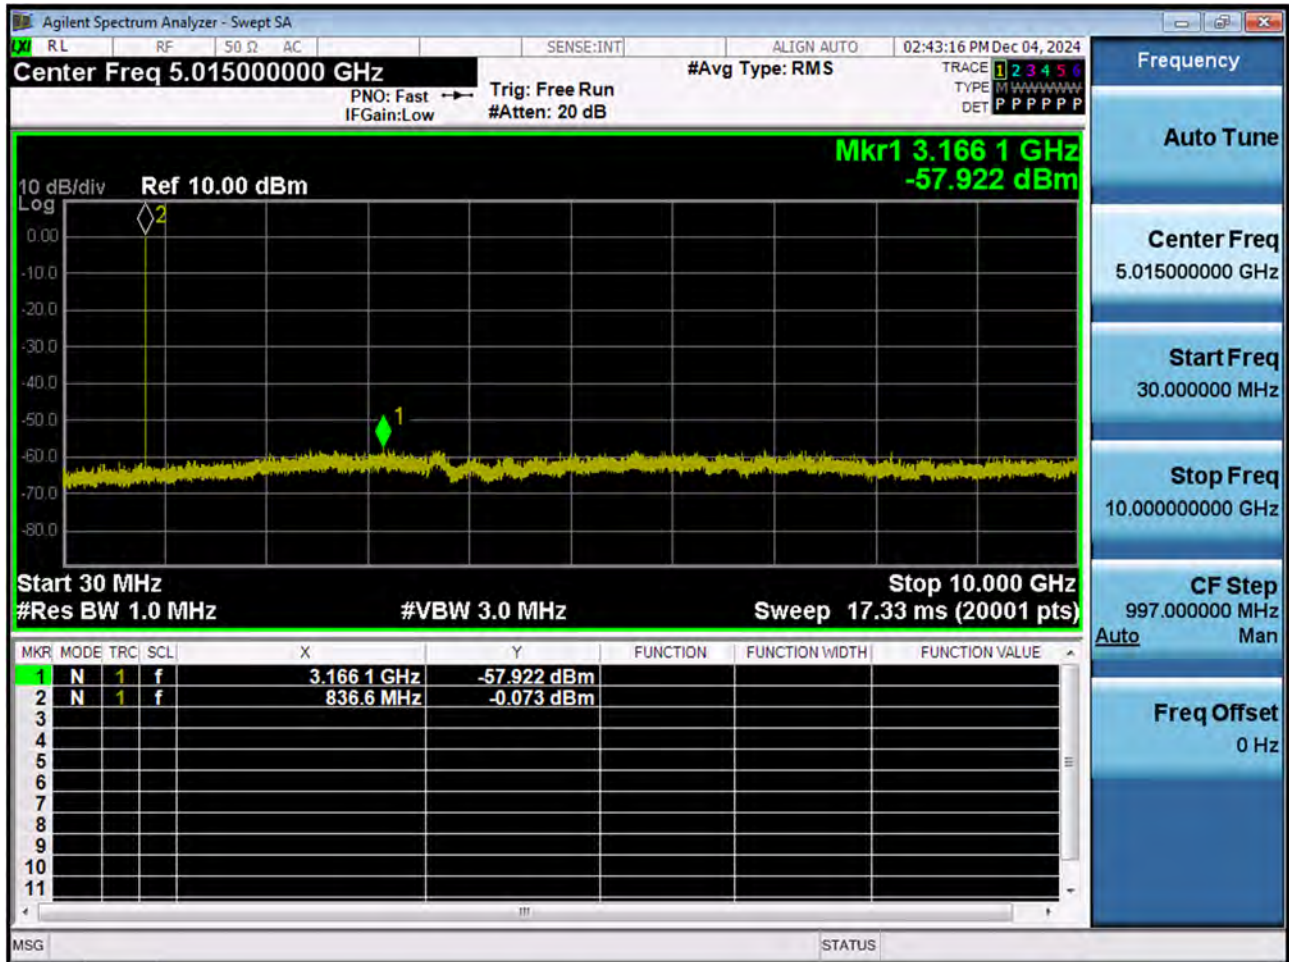


LTE B5_1.4M_Conducted Spurious(30 M-10 G)_High_QPSK_1RB

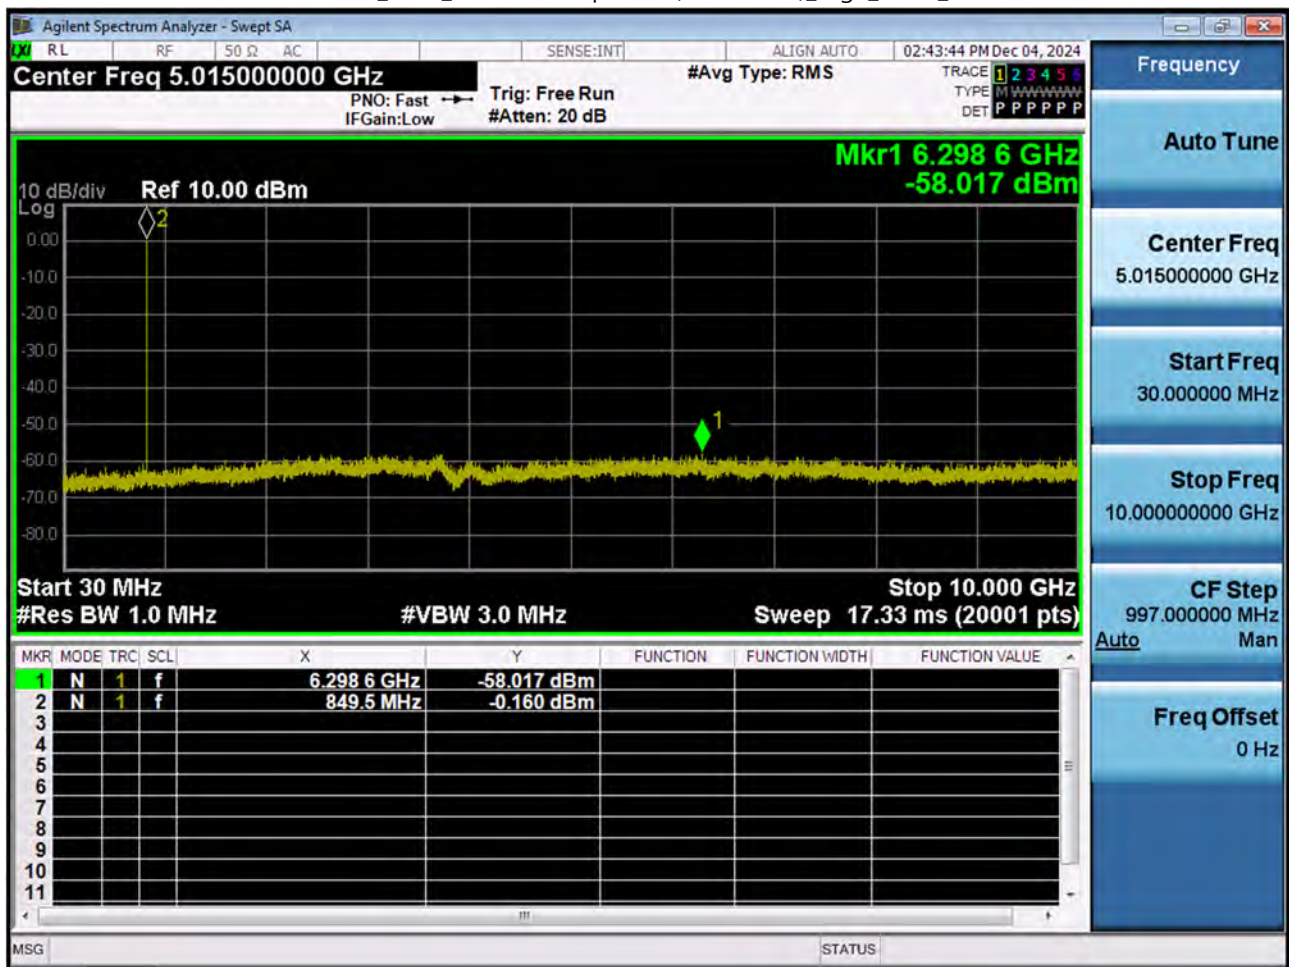


LTE B5_3 M_Conducted Spurious(30 M-10 G)_Low_QPSK_1RB

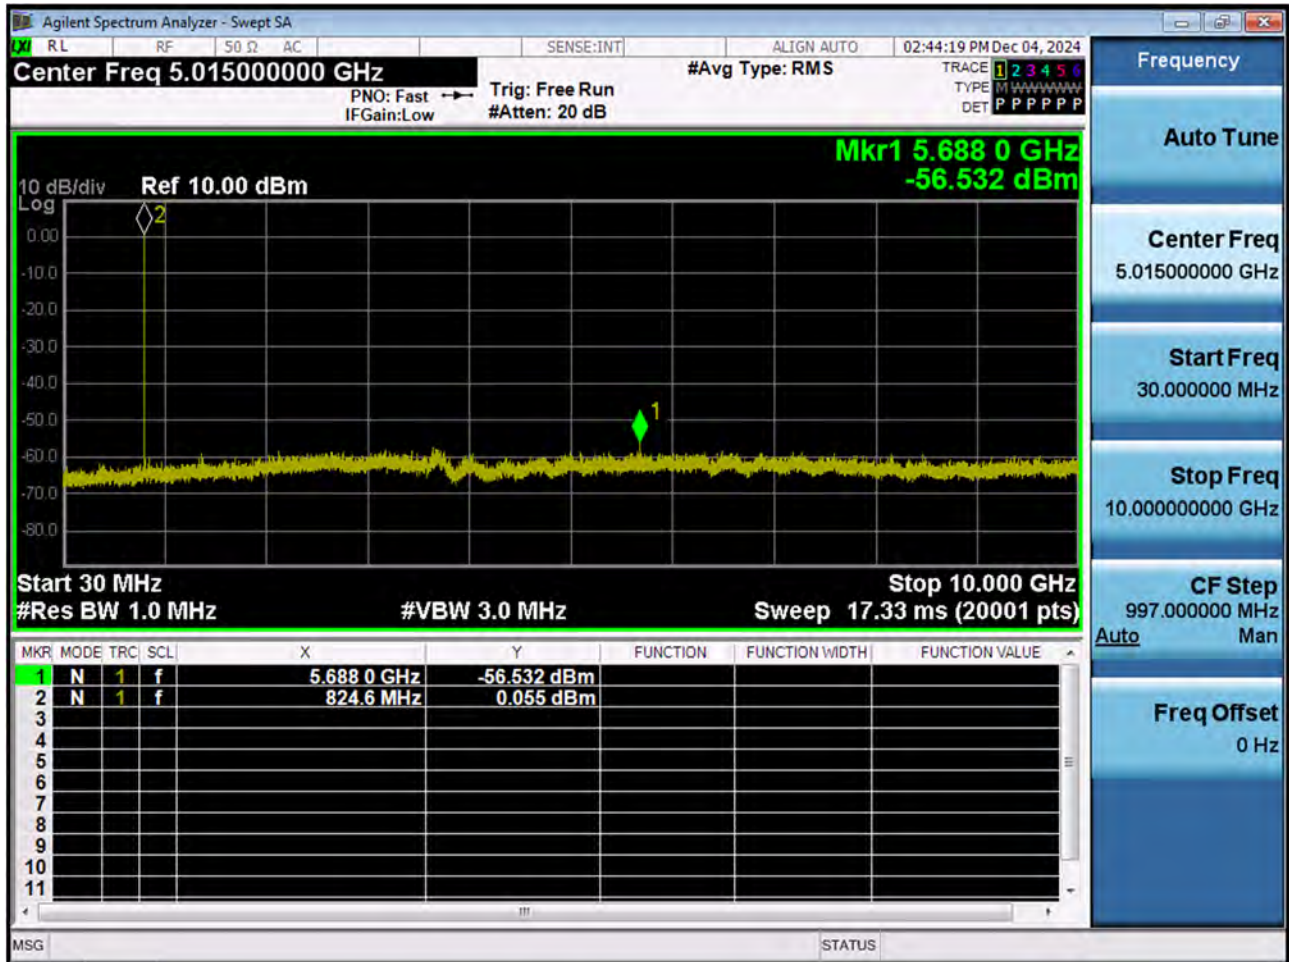


LTE B5_3 M_Conducted Spurious(30 M-10 G)_Mid_QPSK_1RB

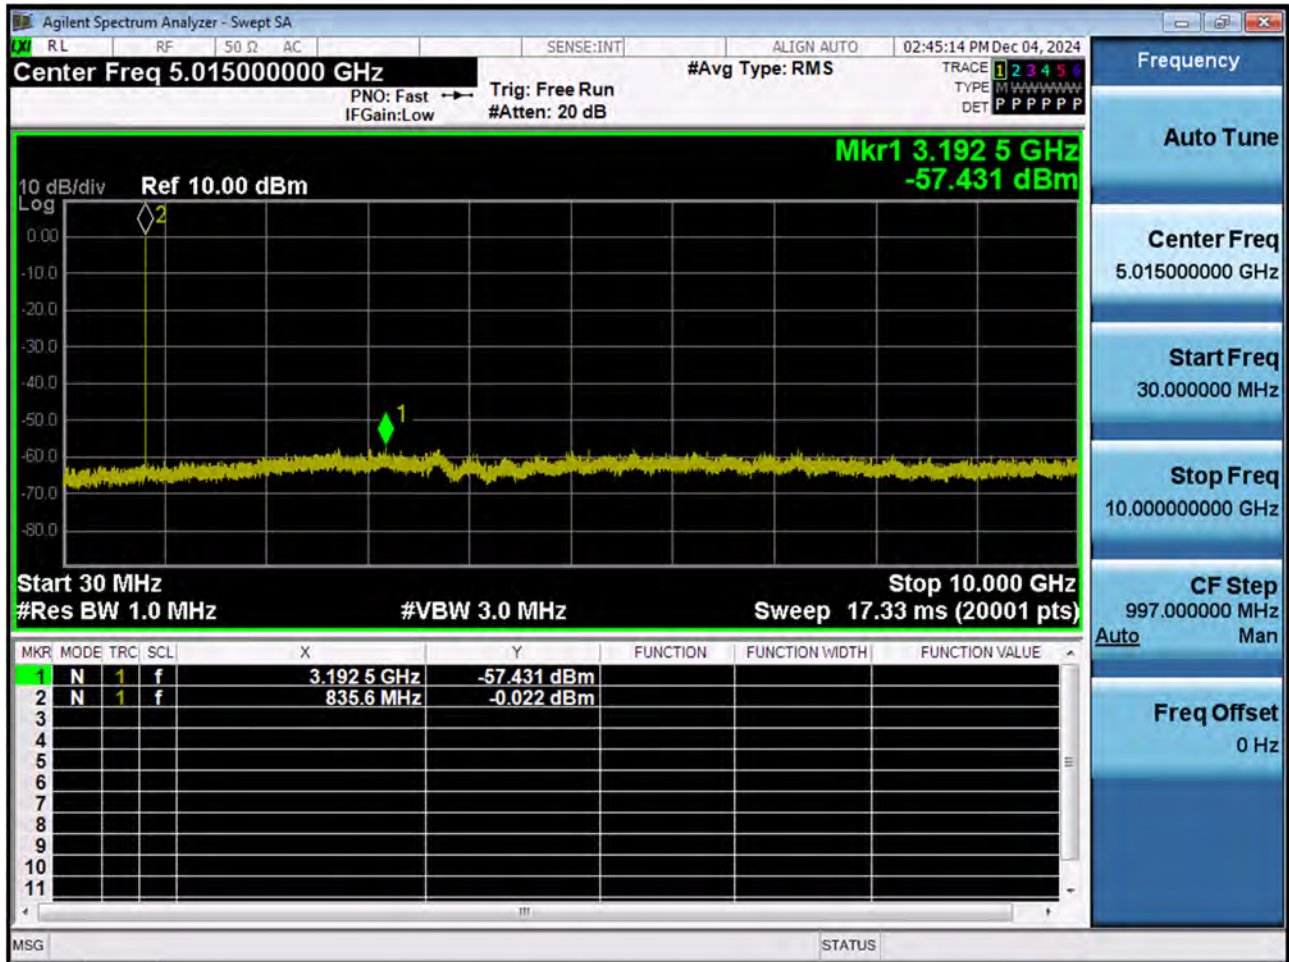


LTE B5_3 M_Conducted Spurious(30 M-10 G)_High_QPSK_1RB

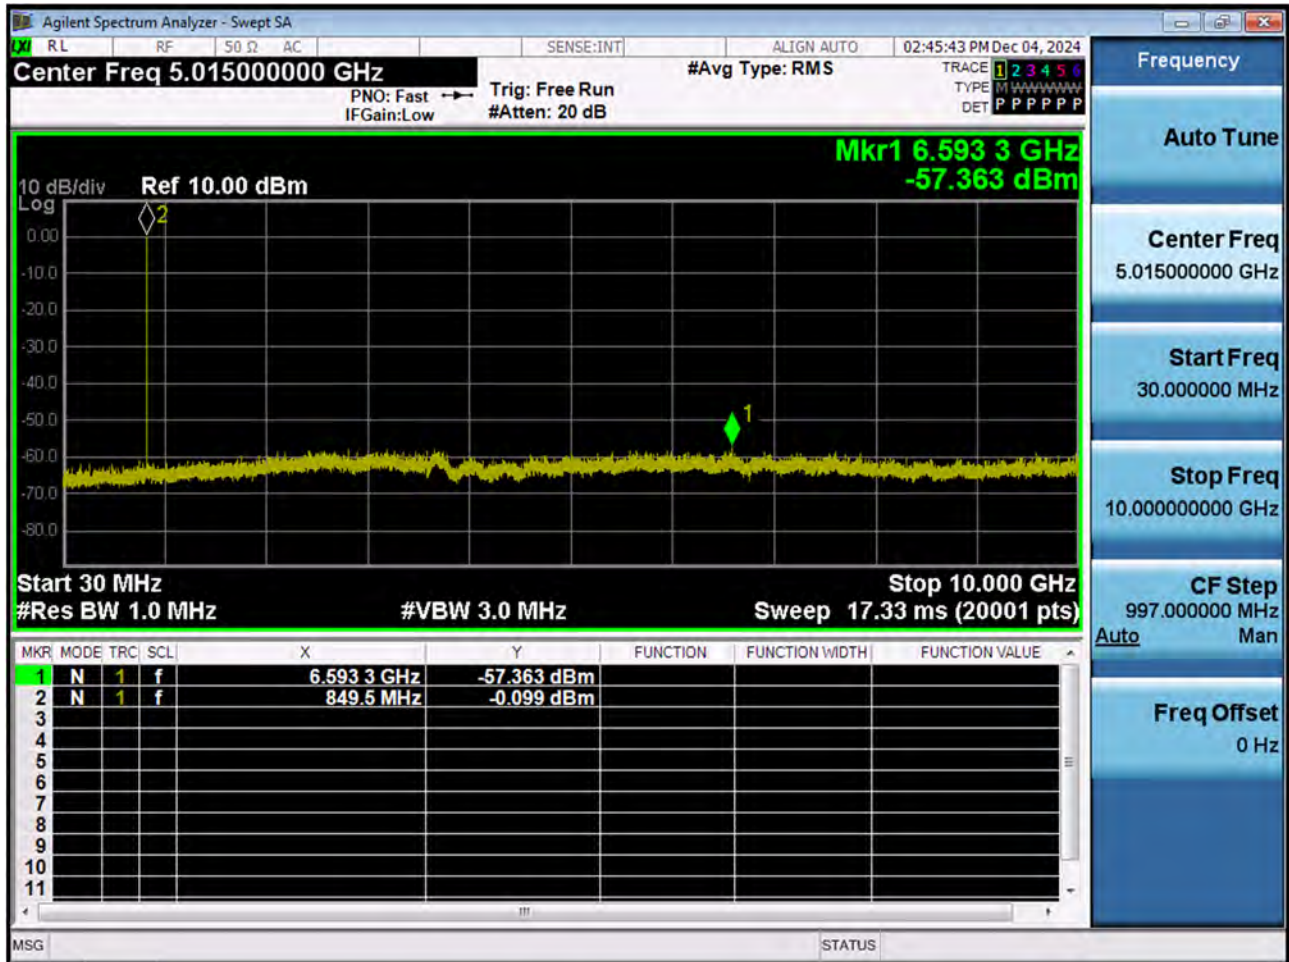


LTE B5_5 M_Conducted Spurious(30 M-10 G)_Low_QPSK_1RB

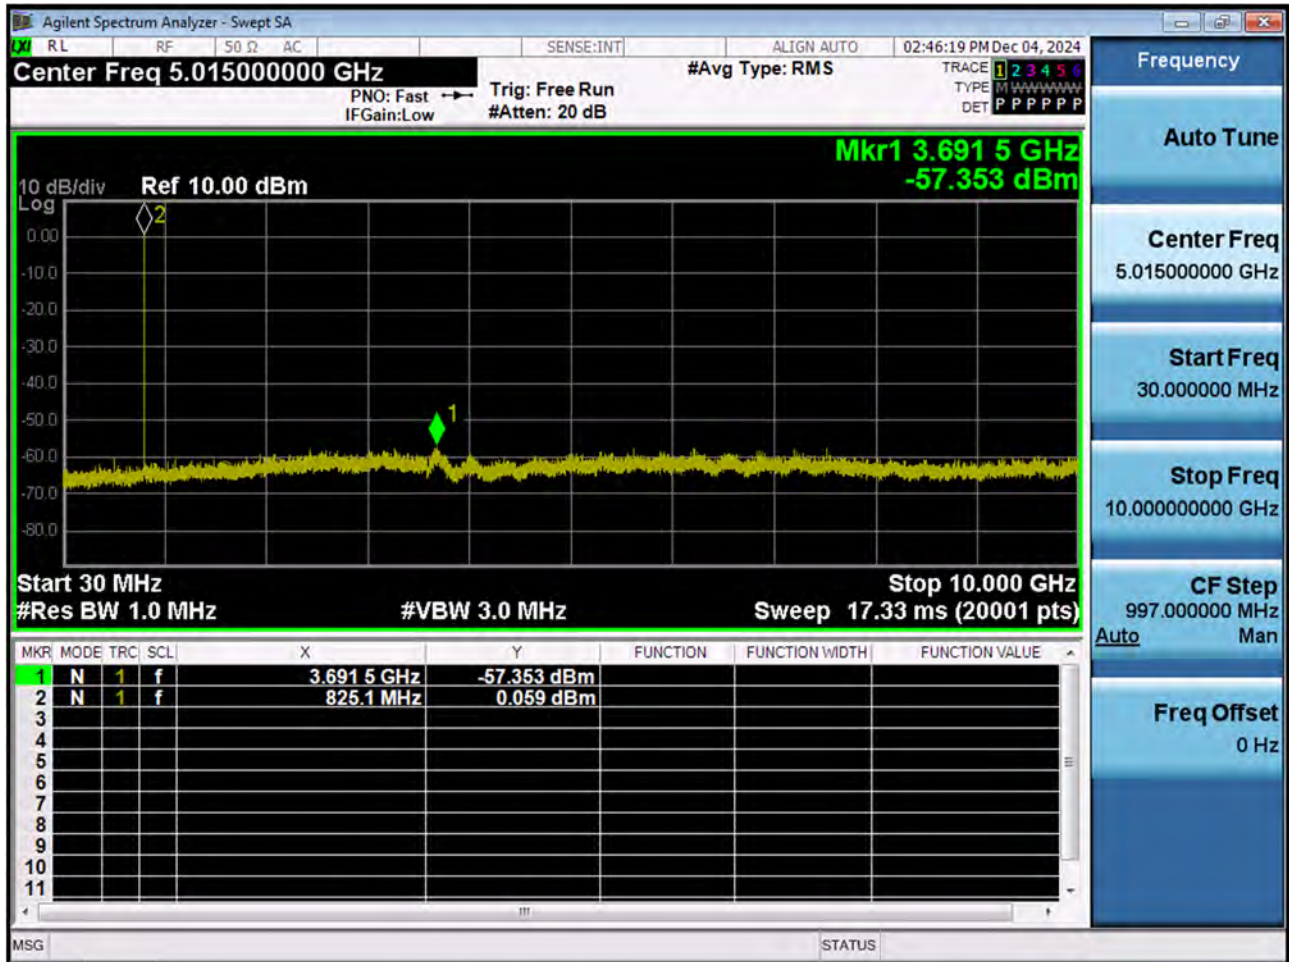


LTE B5_5 M_Conducted Spurious(30 M-10 G)_Mid_QPSK_1RB

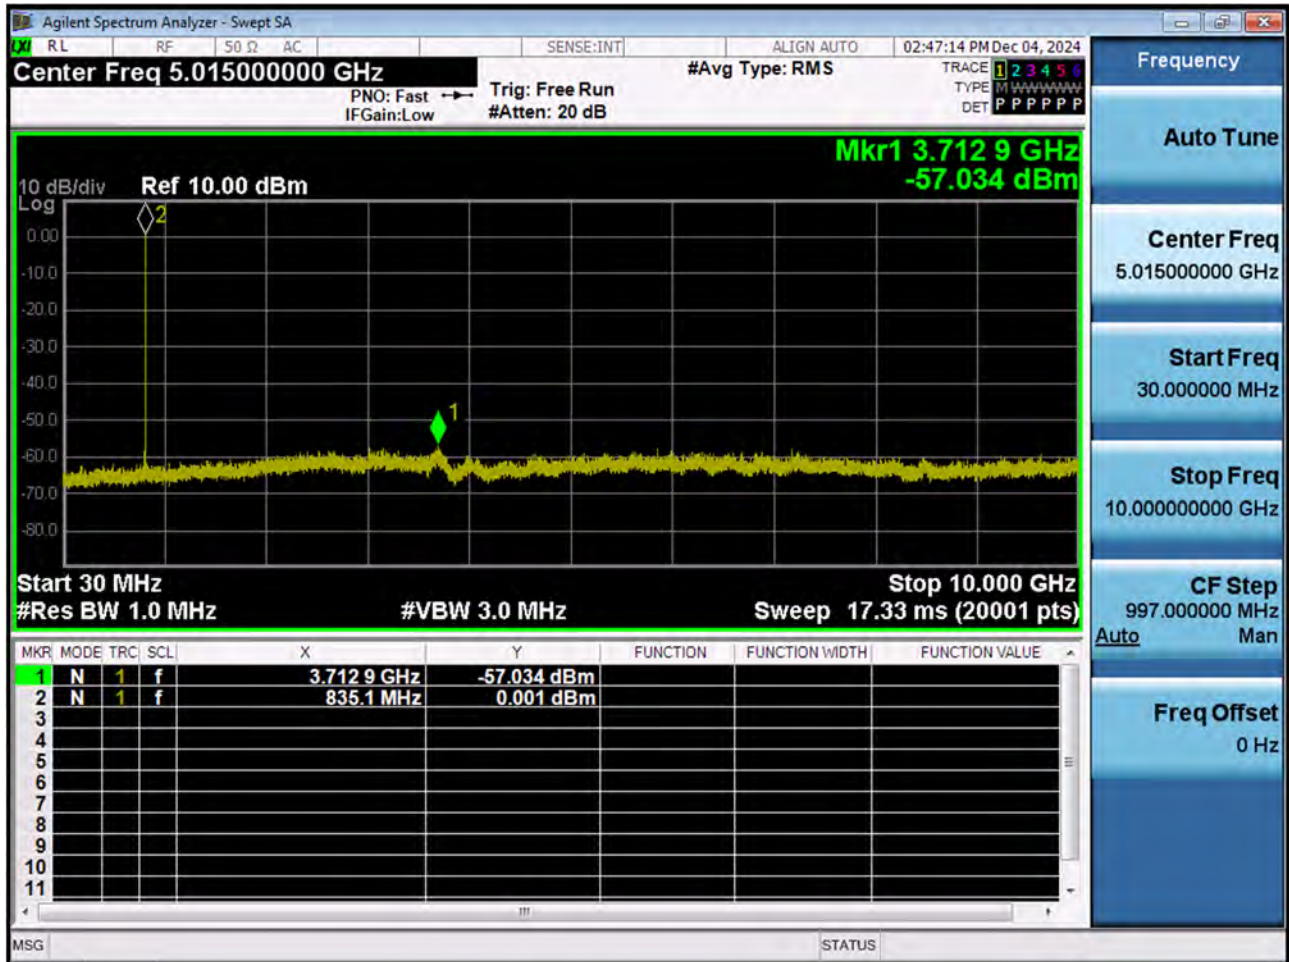


LTE B5_5 M_Conducted Spurious(30 M-10 G)_High_QPSK_1RB

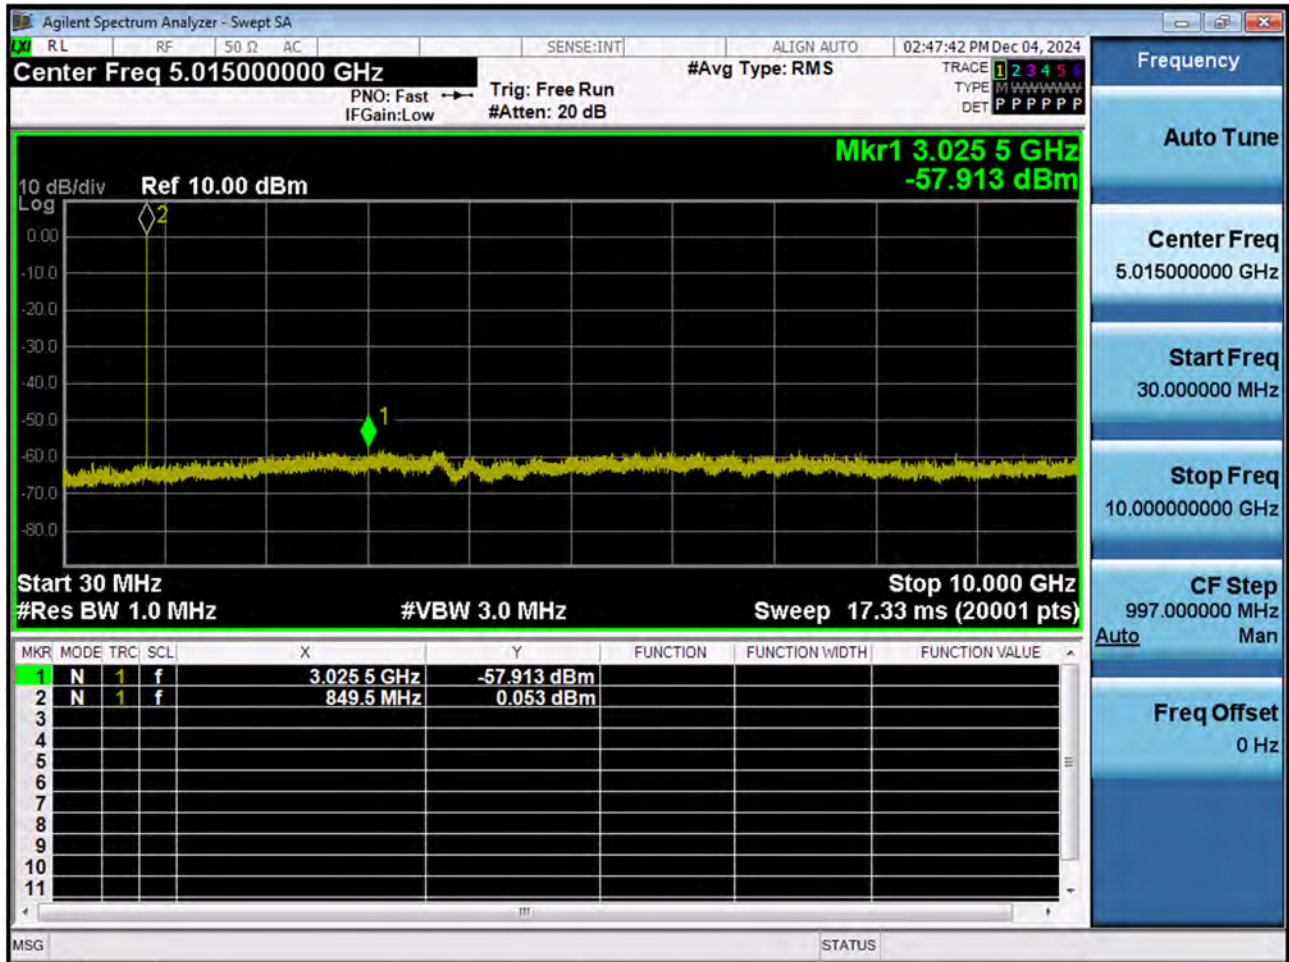


LTE B5_10 M_Conducted Spurious(30 M-10 G)_Low_QPSK_1RB

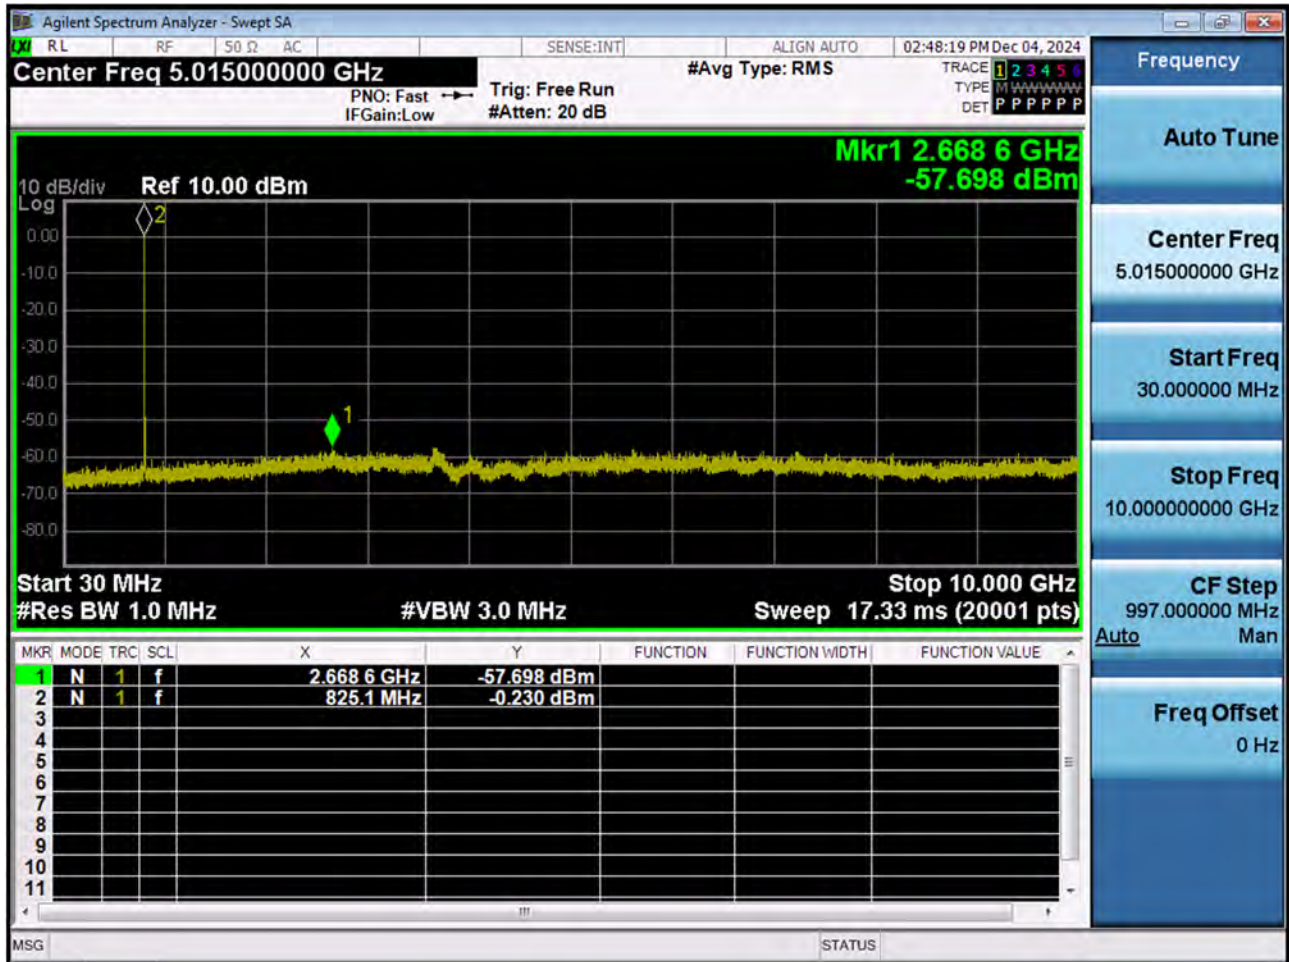


LTE B5_10 M_Conducted Spurious(30 M-10 G)_Mid_QPSK_1RB




LTE B5_10 M_Conducted Spurious(30 M-10 G)_High_QPSK_1RB

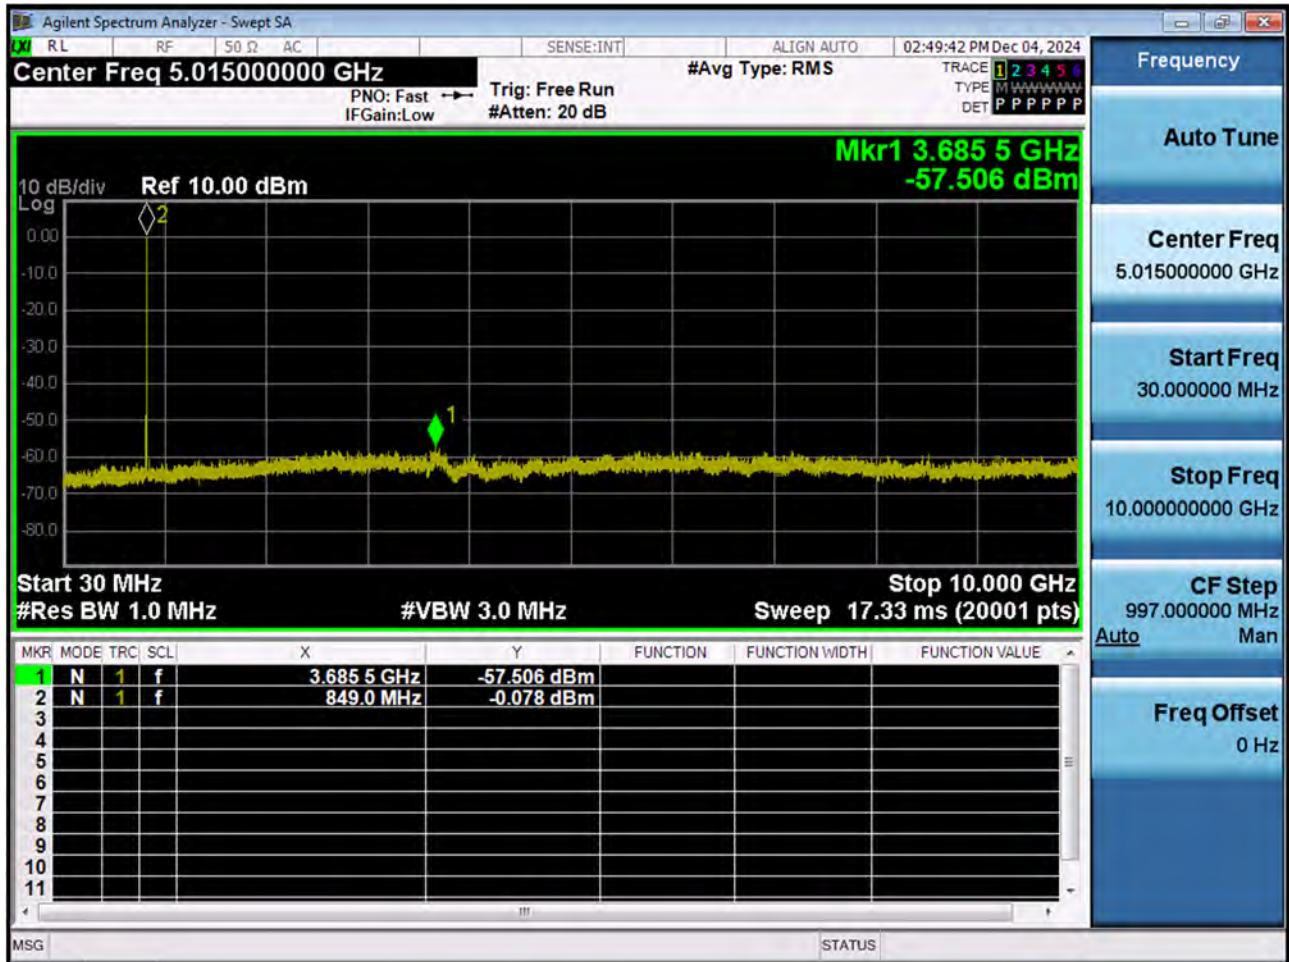

LTE B5_1.4M_Band Edge_Low_QPSK_1RB

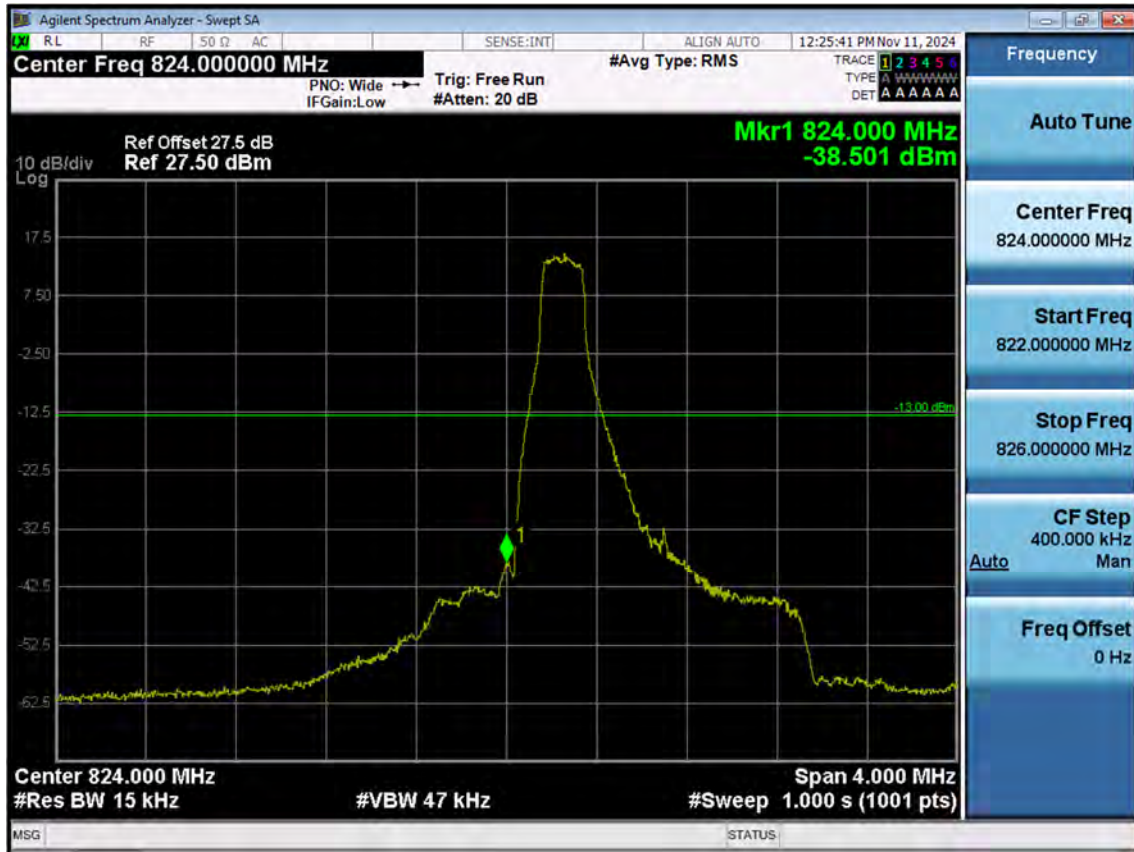

LTE B5_1.4M_Band Edge_Low_QPSK_FullRB

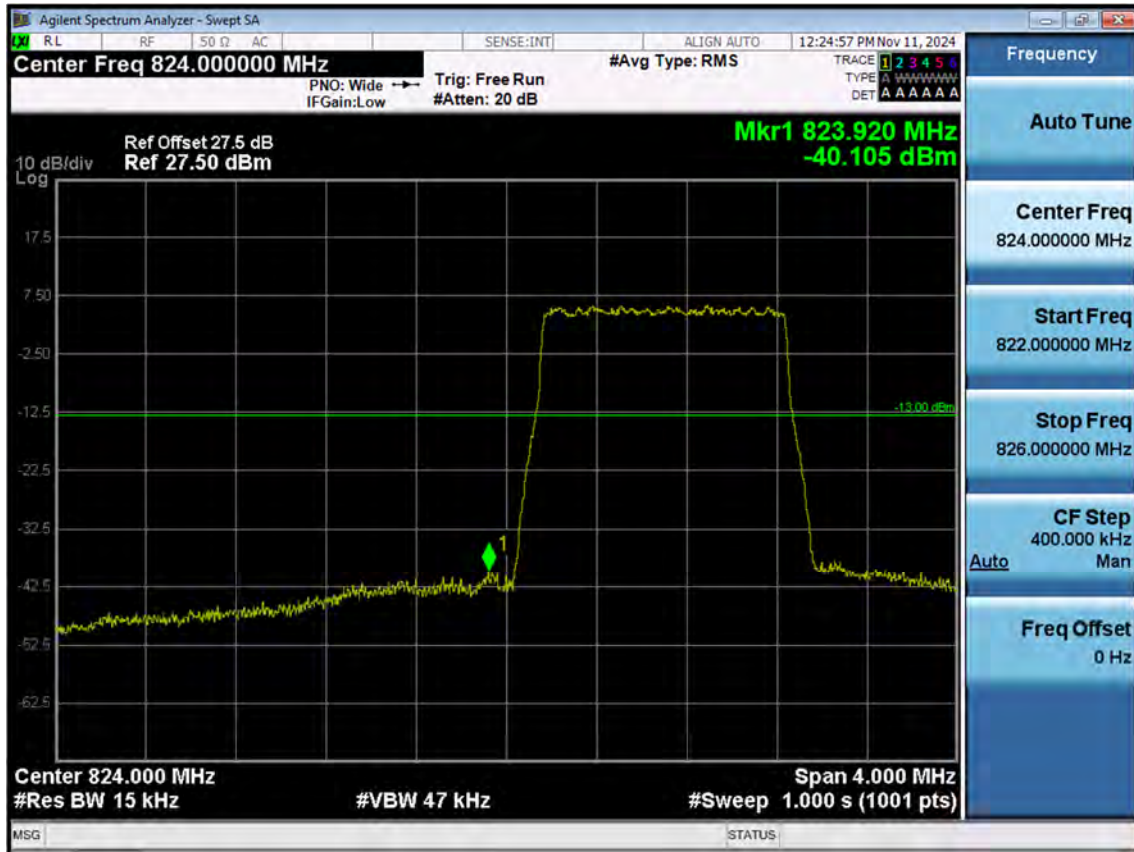


LTE B5_1.4M_Extended Band Edge_Low_QPSK_FullRB




LTE B5_1.4M_Band Edge_High_QPSK_1RB




LTE B5_1.4M_Band Edge_High_QPSK_FullRB

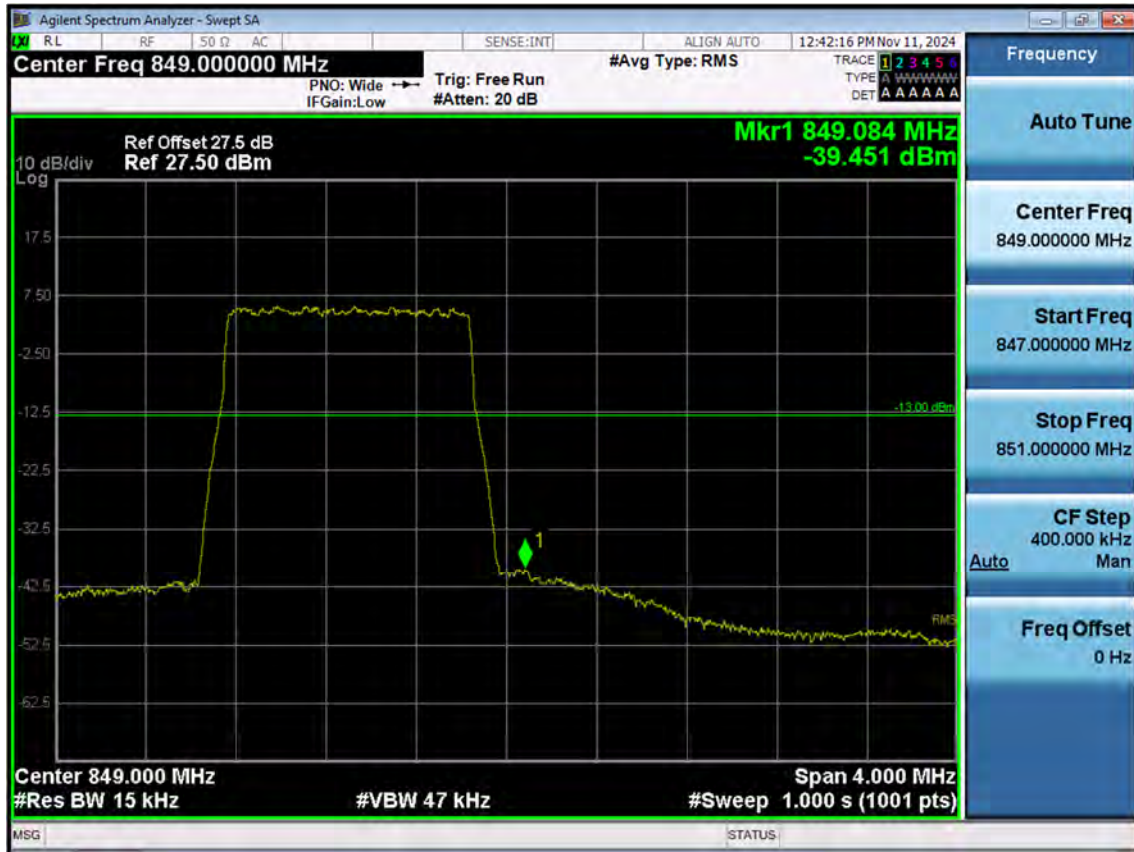


LTE B5_1.4M_Extended Band Edge_High_QPSK_FullRB

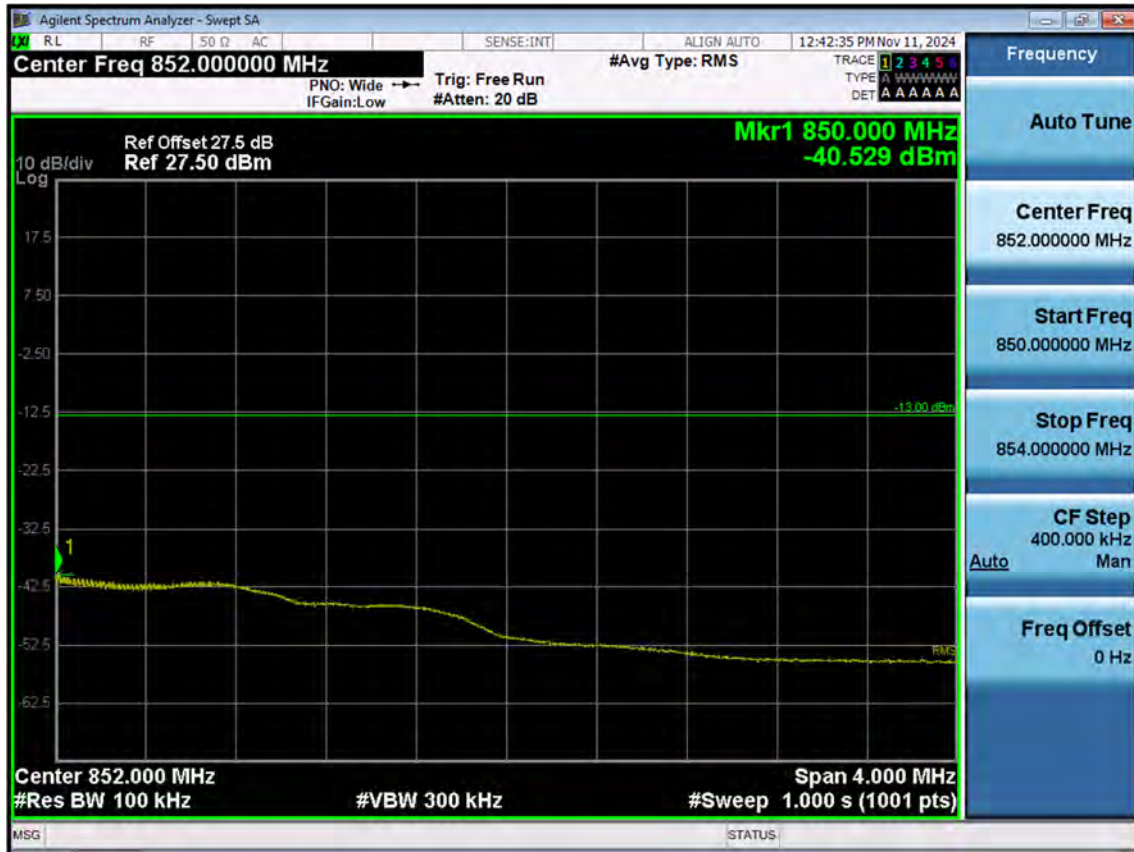


LTE B5_3 M_Band Edge_Low_QPSK_1RB

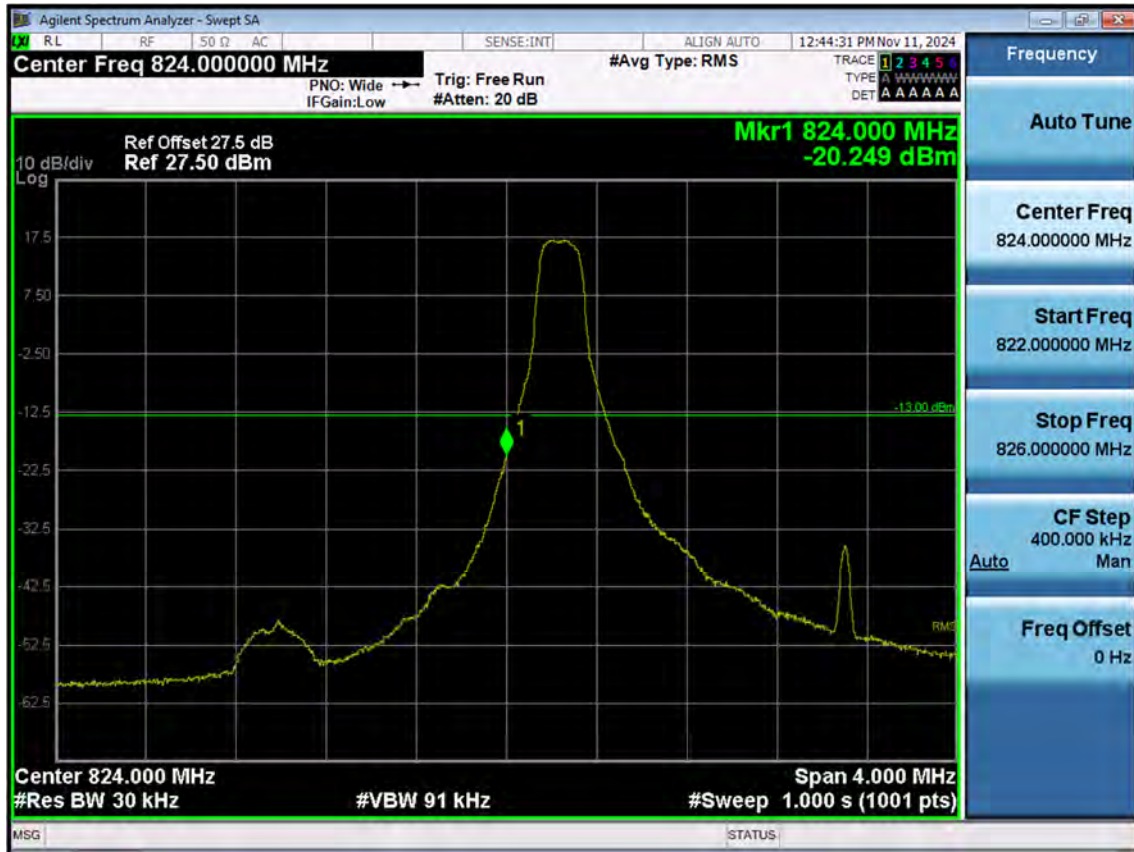


LTE B5_3 M_Band Edge_Low_QPSK_FullRB

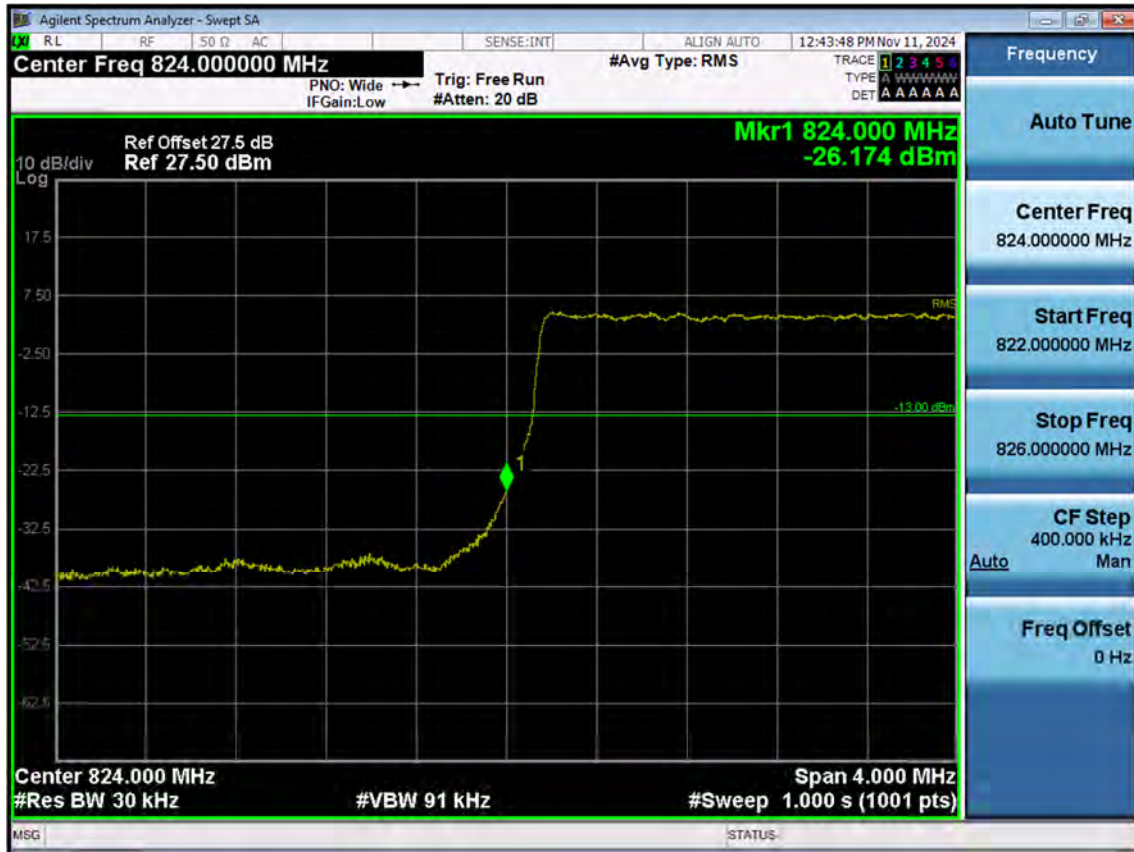

LTE B5_3 M_Extended Band Edge_Low_QPSK_FullRB

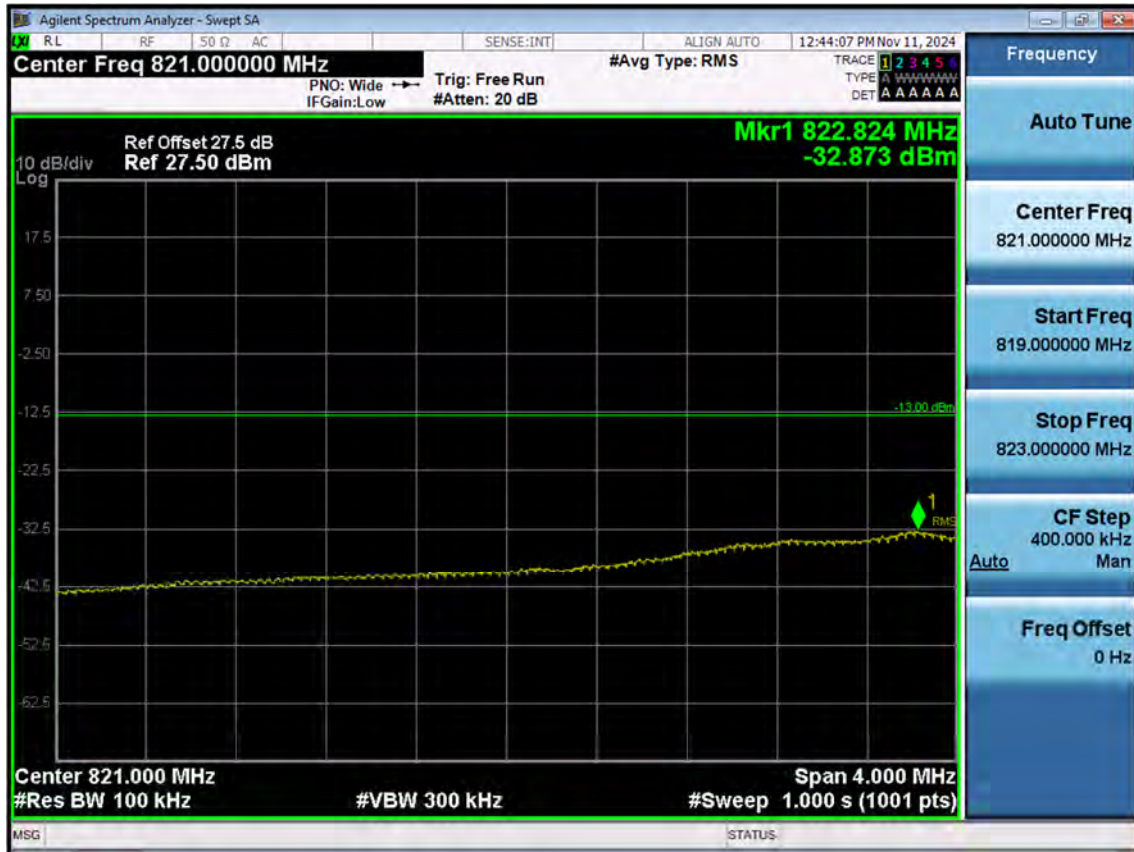

LTE B5_3 M_Band Edge_High_QPSK_1RB

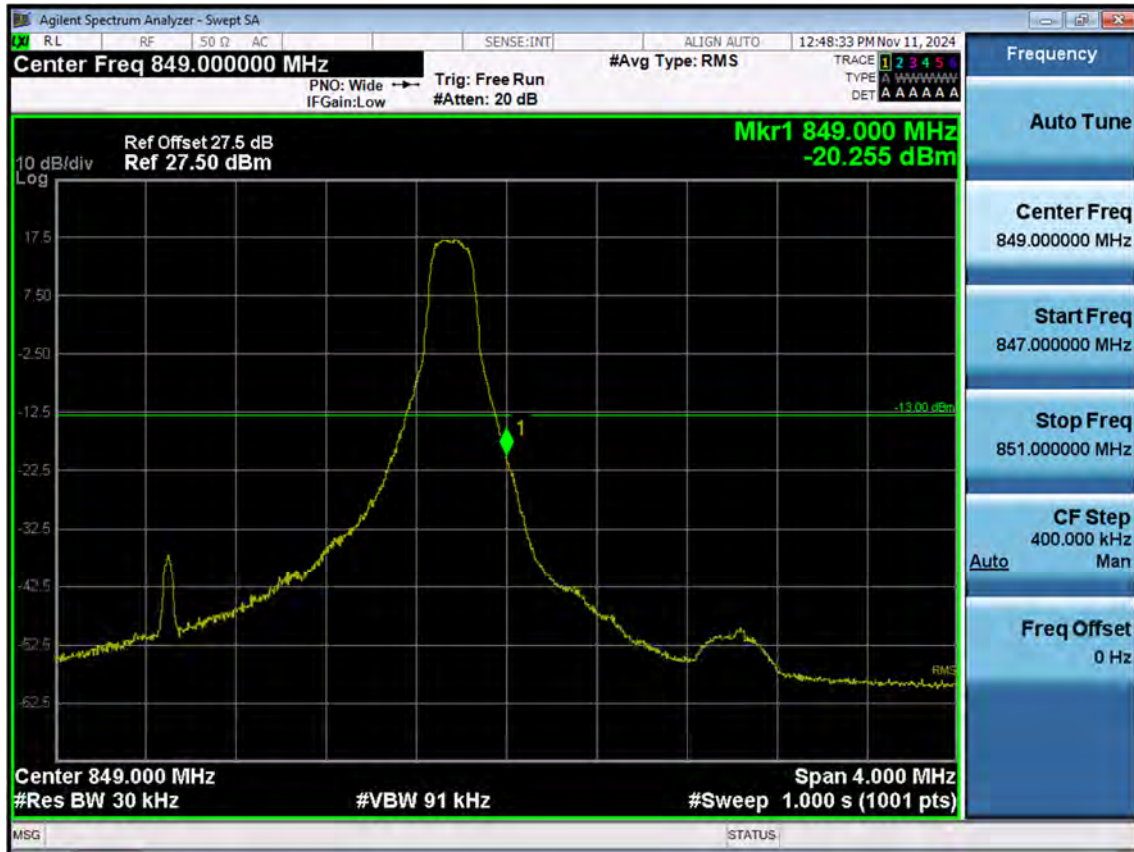


LTE B5_3 M_Band Edge_High_QPSK_FullRB



LTE B5_3 M_Extended Band Edge_High_QPSK_FullRB




LTE B5_5 M_Band Edge_Low_QPSK_1RB

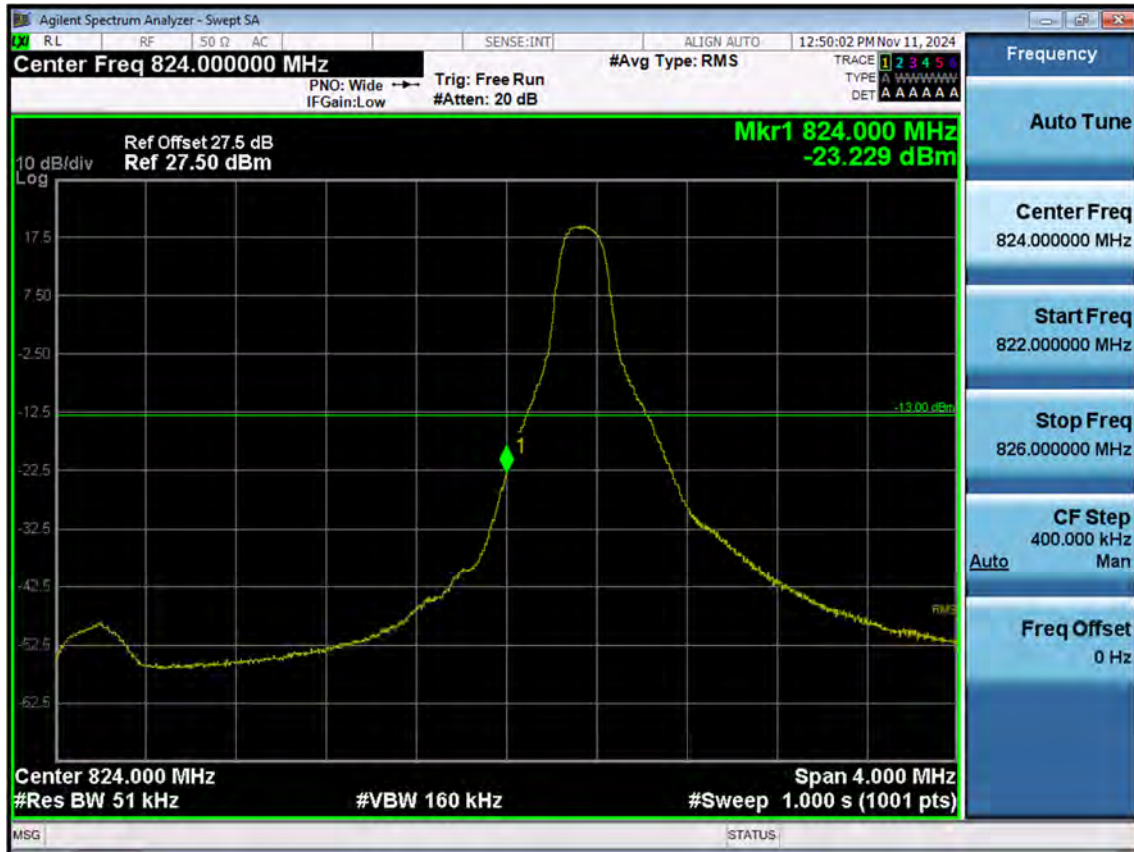

LTE B5_5 M_Band Edge_Low_QPSK_FullRB



LTE B5_5 M_Extended Band Edge_Low_QPSK_FullRB

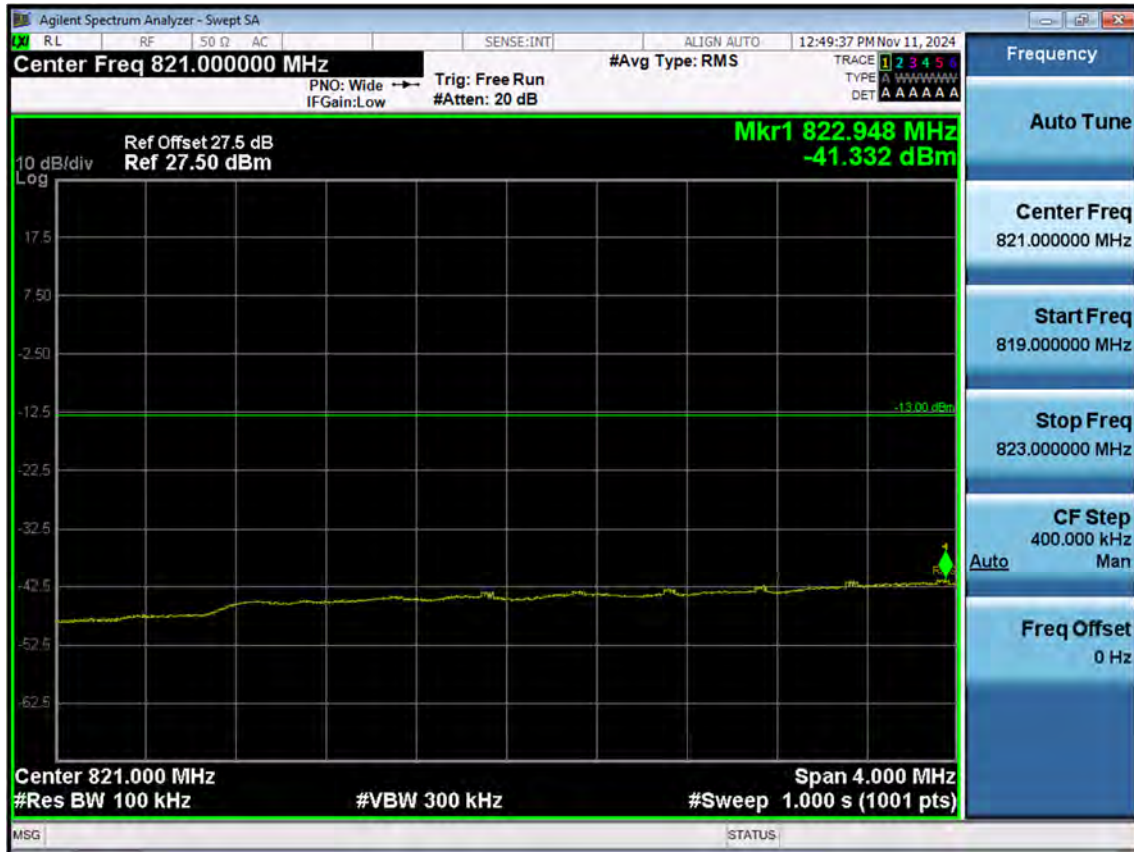

LTE B5_5 M_Band Edge_High_QPSK_1RB



LTE B5_5 M_Band Edge_High_QPSK_FullRB



LTE B5_5 M_Extended Band Edge_High_QPSK_FullRB




LTE B5_10 M_Band Edge_Low_QPSK_1RB



LTE B5_10 M_Band Edge_Low_QPSK_FullRB



LTE B5_10 M_Extended Band Edge_Low_QPSK_FullIRB

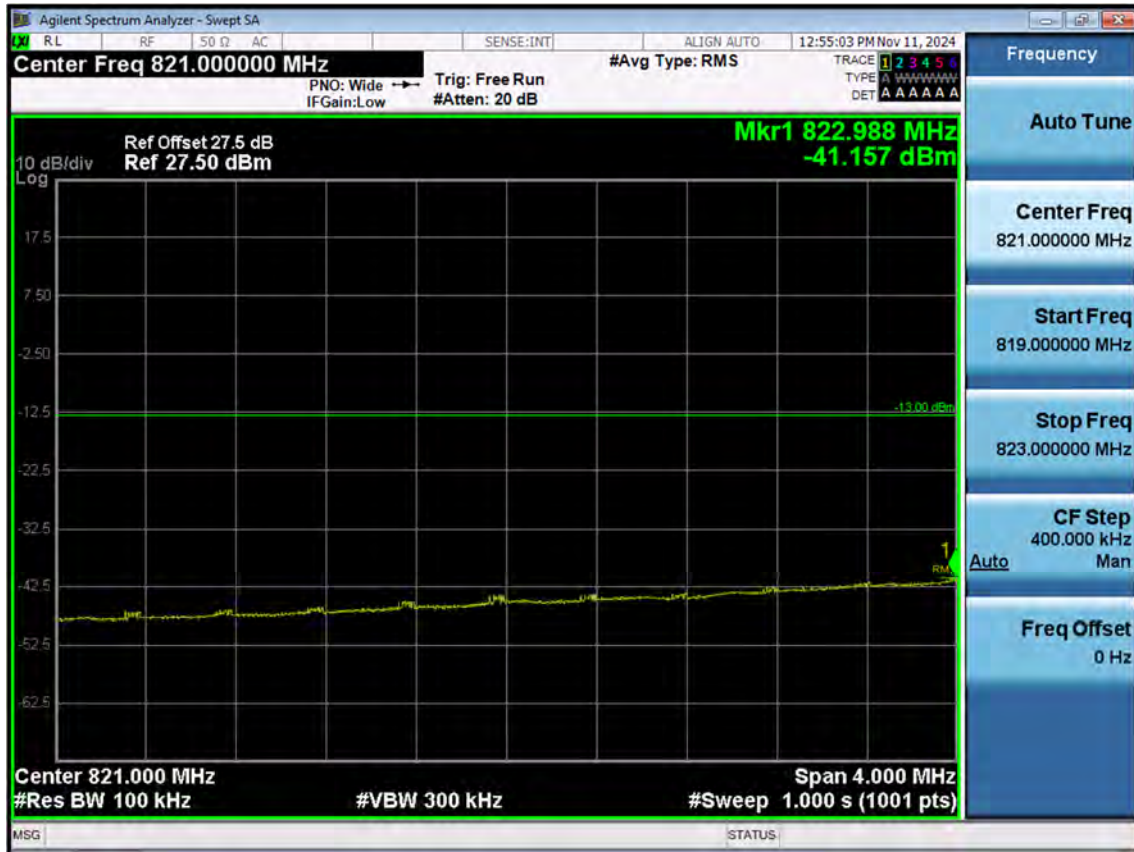

LTE B5_10 M_Band Edge_High_QPSK_1RB



LTE B5_10 M_Band Edge_High_QPSK_FullRB



LTE B5_10 M_Extended Band Edge_High_QPSK_FullRB



10. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2412-FC024-P