

100mm


55mm

Owner's Guide

xBuds_S1

xcentz™

Device Layout

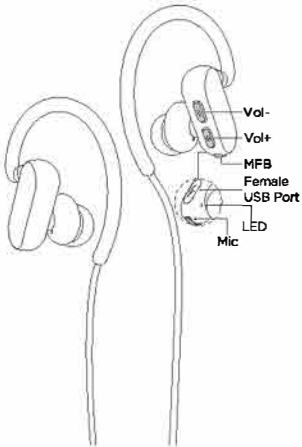

How to Connect

1. Power off the earphones and hold MFB for 1s to power on again and the earphones will auto enter pairing mode.

2. On cellphone, search for xBuds_S1 and tap to connect.

Note: Earphones will auto enter pairing mode upon any disconnectivity with current device.



How to Charge

LED will be solid red when charging and turn to blue once topped up.



Functions

Power On: Hold MFB for 1s (LED will be blue for 1s).

Power Off: Hold MFB for 3s (LED will be red for 2s).

Factory Setting: When pairing, hold both MFB and Vol+ for 3s.

Answer Call: Press MFB to answer incoming call (LED blinks blue promptly).

Ignore Call: Hold MFB for 1s to ignore incoming call (LED blinks blue promptly).

Switch Audio Output: When calling, hold MFB for 1s to switch audio output between cellphone and earphones.

Last Number Redial: When standby, double press MFB.

Voice Assistant: When standby, hold MFB for 1s to activate Voice Assistant (like Siri).

Mute On: When talking, double press MFB to switch mute on/off.

Skip Track: When playing music, hold Vol+/- to skip track forward/backward.

Volume Control: When playing music or calling, press Vol+/-.

Pause/Play: When playback, press MFB to pause and press again to play.

Three-way Calling & Switch: Press MFB to answer incoming call from phone 1. If another call is coming from phone 2 in sync, press MFB to put the first call on hold while activate the second call. Double press MFB to switch between the held call and the active call.

Note:

- For some cellphones, when an incoming call is answered on cellphone, you might need to press Audio Button and select the earphone to switch talking from cellphone to earphone. If the call is answered by earphone, you can talk with earphone directly.
- The Last Number Redial feature is phone dependent.

xcentz™

Features

With bluetooth version 5.0, lower power consumption, longer connection range, and more stable connection.

13g ultralight body delivers comfortable wearing experience.

Φ10mm driver reveals vivid ambience and rich sound stage.

Behind-the-ear style secures earbud in place when you are doing intense exercise.

For the techies...

Model	xBuds_S1
Bluetooth Version	V5.0
Operation Range	10 m (with no obstacle)
Bluetooth Profiles	HFP / A2DP / AVRCP
Music Time	Approx. 8 hr
Standby Time	Approx. 128 hr
Charging Time	Less than 2 hr
Battery Capacity	90 mAh
Input	5 V ~ 100 mA
Weight	0.5 oz / 13 g

Multi-point Connection

Method 1:

- Refer How to Connect to build connection with phone 1.
- On phone 1, turn off Bluetooth and the earphones will auto enter pairing mode.
- On phone 2, search for xBuds_S1 and tap to connect.
- On phone 1, search for xBuds_S1 and tap to finish Multi-point Connection.

Method 2:

- Refer How to Connect to build connection with phone 1.
- Then hold both Vol+ and Vol- to enter pairing mode.
- On phone 2, search for xBuds_S1 and tap to connect.
- On phone 1, search for xBuds_S1 and tap to finish Multi-point Connection.

Safety Information

Here are some helpful tips for how to safely use your device.

Please read them. Ignoring these instructions could result in damage to your device.

- To reduce the risk of injury, close supervision is necessary when the device is used near children.
- Do not open, crush, bend, or puncture the device.
- Do not use harsh chemicals or strong detergents to clean the device.
- Do not expose the device to rain or snow. Do not spill coffee on the device, drop it in beer, or get it wet with liquid of any kind.
- Do not use the device that is damaged or modified. Damaged or modified device may exhibit unpredictable behavior resulting in risk of injury.

Returns & Warranty

At Xcentz, it is our mission to make awesome products that last. This is why we let all of our customers try them out for 30 days. If you're not totally thrilled with your purchase, you can return it for a full refund.

If one of our products breaks down from normal wear and tear within your first 18 months of ownership, let us know and we'll send you a new one.

- 30-Day Full Refund
- 18-Month Limited Warranty
- Lifetime Technical Support

For easy returns and replacements, please visit our website at: xcentz.com

FCC COMPLIANCE STATEMENT:
This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Customer Support

If you have any questions or need more help, give us a call or drop us an email. We'll get back to you within 24 business hours.

833-606-5588

support@xcentz.com

Follow us on social to see what we're working on and help us decide what to make next!

@xcentzOfficial

@xcentz_official

@xcentz

1.尺寸要求：图面标注尺寸为必检尺寸

2.环保要求：符合和乐环保标准《HL-QP-RD-03》& 包材指令

3.可靠性要求：符合和乐物料可靠性测试规范《HL-WI-QA-026》

4.其它方面要求：

名称	公差:mm	东莞市和乐电子有限公司				
外箱	±5.0	材料确认表	软件		法务	
彩盒	±0.5		电子		市场	
标签	±0.5		结构		包装	易超
说明书	±1.0		声学			
热缩膜	宽:±3,高:±15		品牌			
防爆袋	宽:±3,高:±15	料号	30.001.000993			
		名称	QY31 xcentz说明书			
		材质工艺	70G白书纸对折再风琴折			
		软件版本号				
		物料承认书编号				