

FCC 47 CFR PART 15 SUBPART C AND ANSI C63.10: 2013

TEST REPORT

For

Pro Single Deck Media player w/platter

Model: SC5000M PRIME

Data Applies to: N/A

Brand: DENON DJ

Issued for

inMusic Brands, Inc.

200 Scenic View Drive, Cumberland, RI 02864, U.S.A.

Issued by

Compliance Certification Services Inc.

Tainan Lab.

No.8,Jiucengling, Xinhua Dist., Tainan City 712, Taiwan (R.O.C.)

TEL: 886-6-580-2201

FAX: 886-6-580-2202

Date of Issue: June 13, 2018



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. Ltd. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

REVISION HISTORY

| Rev. | Issue Date | Revisions | Effect Page | Revised By |
|------|---------------|---------------|-------------|------------|
| 00 | June 13, 2018 | Initial Issue | ALL | Gina Lin |
| | | | | |
| | | | | |

TABLE OF CONTENTS.

| | |
|---|------------|
| 1. TEST REPORT CERTIFICATION | 4 |
| 2. EUT DESCRIPTION | 5 |
| 3. DESCRIPTION OF TEST MODES | 6 |
| 4. TEST METHODOLOGY | 7 |
| 5. FACILITIES AND ACCREDITATIONS..... | 7 |
| 5.1 FACILITIES..... | 7 |
| 5.2 EQUIPMENT..... | 7 |
| 5.3 LABORATORY ACCREDITATIONS LISTINGS | 7 |
| 5.4 TABLE OF ACCREDITATIONS AND LISTINGS..... | 8 |
| 6. CALIBRATION AND UNCERTAINTY..... | 8 |
| 6.1 MEASURING INSTRUMENT CALIBRATION..... | 8 |
| 6.2 MEASUREMENT UNCERTAINTY | 8 |
| 7. SETUP OF EQUIPMENT UNDER TEST..... | 9 |
| 7.1 SETUP CONFIGURATION OF EUT..... | 9 |
| 7.2 SUPPORT EQUIPMENT | 10 |
| 7.3 EUT OPERATING CONDITION | 12 |
| 8. APPLICABLE LIMITS AND TEST RESULTS..... | 15 |
| 8.1 6DB BANDWIDTH | 15 |
| 8.2 MAXIMUM PEAK OUTPUT POWER..... | 26 |
| 8.3 DUTY CYCLE | 39 |
| 8.4 POWER SPECTRAL DENSITY | 52 |
| 8.5 CONDUCTED SPURIOUS EMISSION..... | 63 |
| 8.6 RADIATED EMISSIONS..... | 76 |
| 8.6.1 TRANSMITTER RADIATED SUPURIOUS EMSSIONS..... | 76 |
| 8.6.2 WORST-CASE RADIATED EMISSION BELOW 1 GHZ | 81 |
| 8.6.3 TRANSMITTER RADIATED EMISSION ABOVE 1 GHZ | 83 |
| 8.6.4 RESTRICTED BAND EDGES..... | 95 |
| 8.7 POWERLINE CONDUCTED EMISSIONS | 111 |
| 9. ANTENNA REQUIREMENT | 115 |
| 9.1 STANDARD APPLICABLE | 115 |
| 9.2 ANTENNA CONNECTED CONSTRUCTION | 115 |
| APPENDIX II PHOTOGRAPHS OF EUT | A1 |

1. TEST REPORT CERTIFICATION

Applicant : **inMusic Brands, Inc.**
200 Scenic View Drive, Cumberland, RI 02864, U.S.A.

Equipment Under Test : Pro Single Deck Media player w/platter

Model : SC5000M PRIME

Data Applies To : N/A


Brand : DENON DJ

Date of Test : April 03, 2018 ~ May 07, 2018


| APPLICABLE STANDARD | |
|--|-------------------------|
| STANDARD | TEST RESULT |
| FCC Part 15 Subpart C AND ANSI C63.10: 2013 | No non-compliance noted |

Approved by:

Reviewed by:



Jeter Wu
Assistant Manager

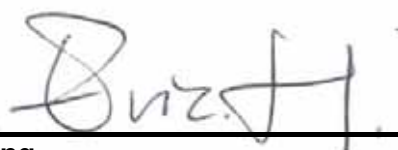

Eric Huang
Section Manager

2. EUT DESCRIPTION

| | |
|----------------------------|---|
| Product Name | Pro Single Deck Media player w/platter |
| Model | SC5000M PRIME |
| Data Applies To | N/A |
| Brand | DENON DJ |
| Received Date | December 25, 2017 |
| Frequency Range | IEEE 802.11b/g, 802.11n HT20: 2412MHz~2462MHz Bluetooth 4.0: 2402MHz~2480MHz |
| Transmit Power | IEEE 802.11b Mode: 17.72dBm (59.156mW) IEEE 802.11g Mode: 18.60dBm (72.444mW) IEEE 802.11n HT20 Mode: 21.98dBm (157.761mW) Bluetooth 4.0 Mode: 1.49dBm (1.410mW) |
| Channel Spacing | IEEE 802.11b/g, 802.11n HT20: 5MHz Bluetooth 4.0: 2MHz |
| Channel Number | IEEE 802.11b/g, 802.11n HT20: 11 Channels Bluetooth 4.0 : 40 Channels |
| Transmit Data Rate | IEEE 802.11b : 11, 5.5, 2, 1Mbps IEEE 802.11g : 54, 48, 36, 24, 18, 12, 9, 6Mbps IEEE 802.11n HT20 : 130, 117, 104, 78, 65, 58.5, 52, 39, 26, 19.5, 13, 6.5 Mbps Bluetooth 4.0: 1 Mbps |
| Type of Modulation | IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK, BPSK) Bluetooth 4.0: GFSK |
| Frequency Selection | by software / hardware / firmware |
| Antenna Type | Type: PCB Antenna Model: WLA-EM-1508-0008-B Manufacturer: BRITO Gain: 4.6 dBi |
| Hardware Version | AZ01 CR PCB 9-40-0752-A 9-79-0752-A |
| Firmware Version | jp08-2018-04-20-17-09-Planck-current-JP08-1.2.0-95e1c1b-SC5000-1.2.0 -incremental-FullImage.tar jp08_tp_factory_00_16_109061 |
| Software Version | N/A |
| Power Rating | AC 100-240V, 50/60Hz |
| Temperature Range | 0 ~ +25°C |

REMARK:

1. The sample (**SC5000M PRIME**) selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **Y4O-JP08** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.
3. For more details, please refer to the User's manual of the EUT.

3. DESCRIPTION OF TEST MODES

The EUT is a Pro Single Deck Media player w/platter. It has one transmitter chains and one receive chains (1x1 configurations) and BT4.0. The 1x1 configuration is implemented with one outside chains (Chain 0).

The RF chipset is manufactured by SMSC.

The antenna peak gain 4.6dBi (highest gain) were chosen for full testing.

IEEE 802.11 b ,802.11g ,802.11n HT20 mode (DTS Band)

The EUT had been tested under operating condition.

There are three channels have been tested as following:

| Channel | Frequency (MHz) |
|---------|-----------------|
| Low | 2412 |
| Middle | 2437 |
| High | 2462 |

IEEE 802.11b mode: 1Mbps long data rate (worst case) were chosen for full testing.

IEEE 802.11g mode: 6Mbps data rate (worst case) were chosen for full testing.

IEEE 802.11n HT20 mode: 6.5Mbps data rate (worst case) were chosen for full testing.

GFSK mode

The EUT had been tested under operating condition.

There are three channels have been tested as following:

| Channel | Frequency (MHz) |
|---------|-----------------|
| Low | 2402 |
| Middle | 2442 |
| High | 2480 |

Bluetooth 4.0 (GFSK) mode: 1Mbps data rate (worst case) were chosen for full testing.

4. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10 and FCC CFR 47 15.207, 15.209 and 15.247.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at No.8, Jiucengling, Xinhua Dist., Tainan City 712, Taiwan (R.O.C.)

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 LABORATORY ACCREDITATIONS LISTINGS

The test facilities used to perform radiated and conducted emissions tests are accredited by Taiwan Accreditation Foundation for the specific scope of accreditation under Lab Code: 1109 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by TAF or any agency of the Government. In addition, the test facilities are listed with Federal Communications Commission (registration no: TW1109).

5.4 TABLE OF ACCREDITATIONS AND LISTINGS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

Taiwan

TAF

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

Canada

Industry Canada

Germany

TUV NORD

Taiwan

BSMI

USA

FCC

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>

6. CALIBRATION AND UNCERTAINTY

6.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

6.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| PARAMETER | UNCERTAINTY |
|--|---------------------|
| Radiated Emission, 30 to 200 MHz Test Site : OATS-6 | $\pm 3.59\text{dB}$ |
| Radiated Emission, 200 to 1000 MHz Test Site : OATS-6 | $\pm 3.27\text{dB}$ |
| Radiated Emission, 1 to 26.5 GHz | $\pm 3.20\text{dB}$ |
| Power Line Conducted Emission | $\pm 2.90\text{dB}$ |


Uncertainty figures are valid to a confidence level of 95%, K=2

7. SETUP OF EQUIPMENT UNDER TEST


7.1 SETUP CONFIGURATION OF EUT

FOR RF TEST


WIFI:

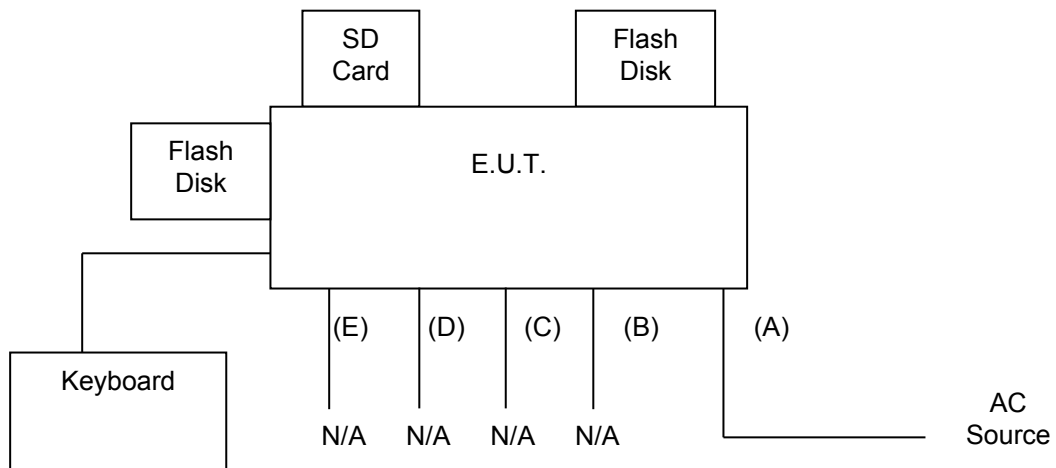

BLUETOOTH:

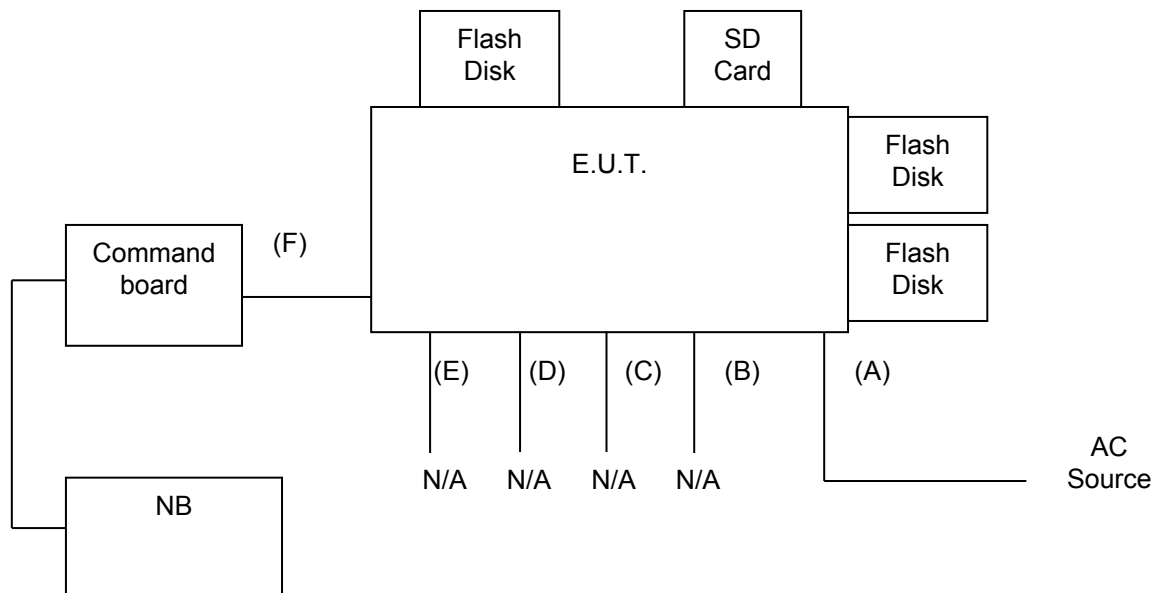

FOR EMI TEST

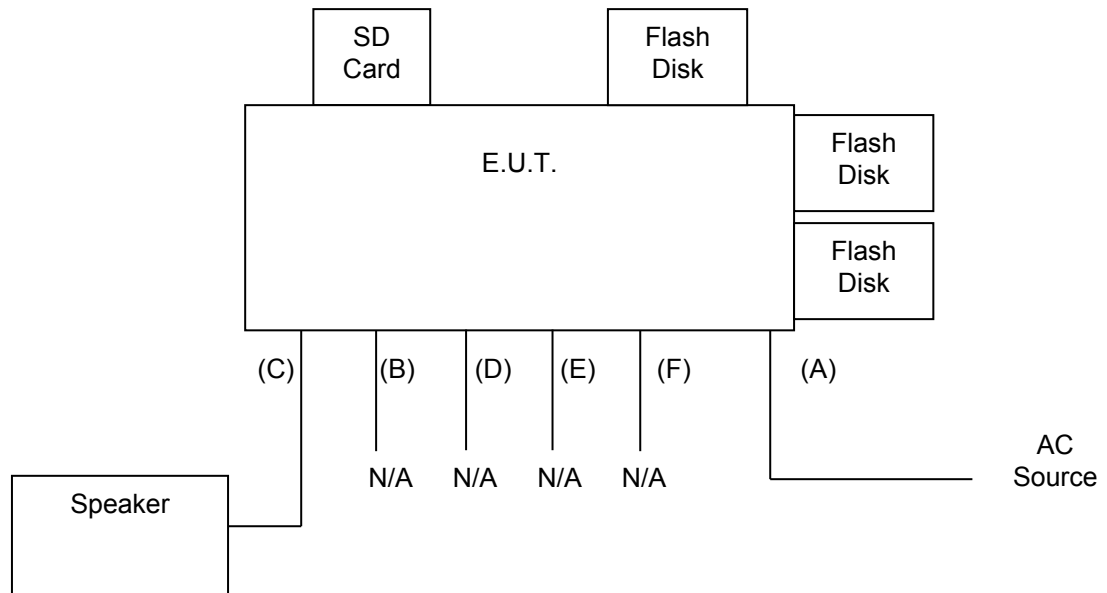

7.2 SUPPORT EQUIPMENT

RF test

| No. | Product | Manufacturer | Model No. | Certify No. | Signal cable |
|-----|------------|--------------|--------------|-------------|--------------------------|
| 1 | Notebook | Acer | AS 3830TG | DOC | Power cable, unshd, 1.6m |
| 2 | Flash Disk | Kingston | DTIG3/8G | D43254 | N/A |
| 3 | Flash Disk | Transcend | Jet Flash790 | D33193 | N/A |
| 4 | SD CARD | TOSHIBA | 2GB | DOC | N/A |
| 5 | Keyboard | Lenovo | KU-0225 | DOC | N/A |

| No. | Signal cable description | |
|-----|--------------------------|-------------------------------------|
| A | Power | Unshielded, 1.6m, 1pcs |
| B | Audio | Unshielded, 1.0m, 3pcs. |
| C | REMOTE | Unshielded, 1.0m, 1pcs. |
| D | USB | Shielded, 1.2m, 1pcs. With one core |
| E | LAN | Unshielded, 0.5m, 1pcs. |
| F | Command | Unshielded, 0.4m, 1pcs. |
| G | USB | Shielded, 1.7m, 1pcs. With one core |

EMI test

| No. | Product | Manufacturer | Model No. | Certify No. | Signal cable |
|-----|----------------|--------------|--------------|-------------|--------------------------|
| 1 | Flash Disk | Kingston | DTIG3/8G | D43254 | N/A |
| 2 | Flash Disk | Transcend | Jet Flash790 | D33193 | N/A |
| 3 | SD CARD | TOSHIBA | 2GB | DOC | N/A |
| 4 | Speaker System | T.C.SATR | TCS2285 | DOC | Power cable, unshd, 1.4m |

| No. | Signal cable description | |
|-----|--------------------------|-------------------------------------|
| A | Power | Unshielded, 1.6m, 1pcs |
| B | Audio | Unshielded, 1.0m, 2pcs. |
| C | Audio | Unshielded, 1.0m, 1pcs. |
| D | REMOTE | Unshielded, 1.0m, 1pcs. |
| E | USB | Shielded, 1.2m, 1pcs. With one core |
| F | LAN | Unshielded, 0.5m, 1pcs. |

REMARK:


1. All the above equipment/cables were placed in worse case positions to maximize emission signals during emission test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

7.3 EUT OPERATING CONDITION

RF Setup

WIFI:

1. Set up a whole system as the setup diagram.
2. Turn on power and press "Exit"
3. Keyboard press Ctrl+Alt+F2 and key in "root".

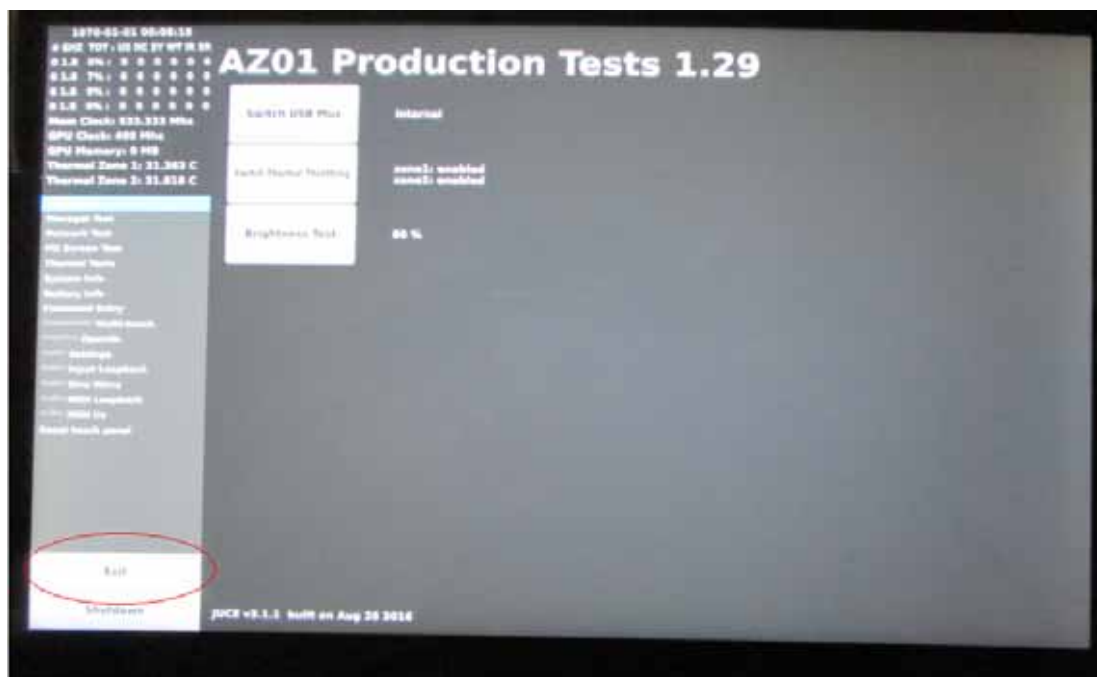

TX Mode Key in

B Mode :

```
wl down
wl mpc 0
wl country ALL
wl band b
wl up
wl 2g_rate -r 01 -b 20
wl channel 01(01,06,11)
wl phy_watchdog 0
wl scansuppress 1
wl phy_forcecal 1
wl phy_txpwrctrl 1
wl txpwr1 -1
wl pkteng_start 00:90:4c:14:43:19 tx 100 1000 0
```

G Mode : wl down
wl mpc 0
wl country ALL
wl band b
wl up
wl 2g_rate -r 06 -b 20
wl channel 01 (01,06,11)
wl phy_watchdog 0
wl scansuppress 1
wl phy_forcecal 1
wl phy_txpwrctrl 1
wl txpwr1 -o -d 13
wl pkteng_start 00:90:4c:14:43:19 tx 100 1000 0

HT20 Mode : wl down
wl mpc 0
wl country ALL
wl band b
wl up
wl 2g_rate -h 0 -b 20
wl channel 01/20 (01,06,11)
wl phy_watchdog 0
wl scansuppress 1
wl phy_forcecal 1
wl phy_txpwrctrl 1
wl txpwr1 -1
wl pkteng_start 00:90:4c:14:43:19 tx 100 1000 0

RX Mode **Key in**

wl down
wl band auto
wl mpc 0
wl country ALL
wl channel 01 (01,06,11)
wl bi 65535
wl up
wl phy_watchdog 0
wl scansuppress 1
wl phy_forcecal 1

4. All of the function are under run.
5. Start test.

Bluetooth:

1. Set up a whole system as the setup diagram.
2. The “putty.exe” software was used for testing
3. Key in “root”.

TX Mode Key in

```
hciconfig hci0 up  
hcidtool cmd 0x03 0x0003  
hcidtool cmd 0x08 0X0001e 00(00,14,27) 25 00
```

RX Mode Key in

```
hciconfig hci0 up  
hcidtool cmd 0x03 0x0003  
hcidtool cmd 0x3f 0x0052 EE FF C0 88 00 00 E8 03 00(00,27,4E) 04 00 01 FF FF
```

4. All of the function are under run.
5. Start test.

8. APPLICABLE LIMITS AND TEST RESULTS

8.1 6DB BANDWIDTH


LIMIT

§ 15.247(a) (2) For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

TEST EQUIPMENTS

| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due |
|------------------------------|--------------|--------|---------------|-----------------|
| PSA Series Spectrum Analyzer | Agilent | E4446A | MY43360132 | 06/06/2019 |

TEST SETUP

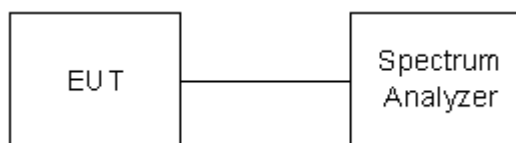

TEST PROCEDURE

1. Set resolution bandwidth (RBW) = 1-5 % of the emission bandwidth (EBW).
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. Compare the resultant bandwidth with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is 1-5 %.

TEST RESULTS

No non-compliance noted.

| | | | |
|----------------------------|---------------|------------------|------------|
| Model Name | SC5000M PRIME | Test By | Ted Huang |
| Temp & Humidity | 26.2 , 43% | Test Date | 2018/04/03 |

IEEE 802.11b mode

| Channel | Channel Frequency (MHz) | 6dB Bandwidth (MHz) | Minimum Limit (kHz) | Pass / Fail |
|---------|-------------------------|---------------------|---------------------|-------------|
| Low | 2412 | 8.09 | 500 | PASS |
| Middle | 2437 | 8.08 | 500 | PASS |
| High | 2462 | 8.08 | 500 | PASS |

NOTE :

1. At final test to get the worst-case emission at 1Mbps long.
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11g mode

| Channel | Channel Frequency (MHz) | 6dB Bandwidth (MHz) | Minimum Limit (kHz) | Pass / Fail |
|---------|-------------------------|---------------------|---------------------|-------------|
| Low | 2412 | 16.40 | 500 | PASS |
| Middle | 2437 | 16.38 | 500 | PASS |
| High | 2462 | 16.39 | 500 | PASS |

NOTE :

1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11n HT20 mode

| Channel | Channel Frequency (MHz) | 6dB Bandwidth (MHz) | Minimum Limit (kHz) | Pass / Fail |
|---------|-------------------------|---------------------|---------------------|-------------|
| Low | 2412 | 17.71 | 500 | PASS |
| Middle | 2437 | 17.70 | 500 | PASS |
| High | 2462 | 17.73 | 500 | PASS |

NOTE :

1. At final test to get the worst-case emission at 6.5Mbps.
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

| | | | |
|----------------------------|---------------|------------------|------------|
| Model Name | SC5000M PRIME | Test By | Ted Huang |
| Temp & Humidity | 26.2 , 43% | Test Date | 2018/04/03 |



Bluetooth 4.0 (GFSK) mode


| Channel | Channel Frequency (MHz) | 6dB Bandwidth (kHz) | Minimum Limit (kHz) | Pass / Fail |
|---------|-------------------------|---------------------|---------------------|-------------|
| Low | 2402 | 720.00 | 500 | PASS |
| Middle | 2442 | 719.00 | 500 | PASS |
| High | 2480 | 716.00 | 500 | PASS |

NOTE :



1. At final test to get the worst-case emission at 1Mbps.
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.


6dB BANDWIDTH (802.11b MODE)

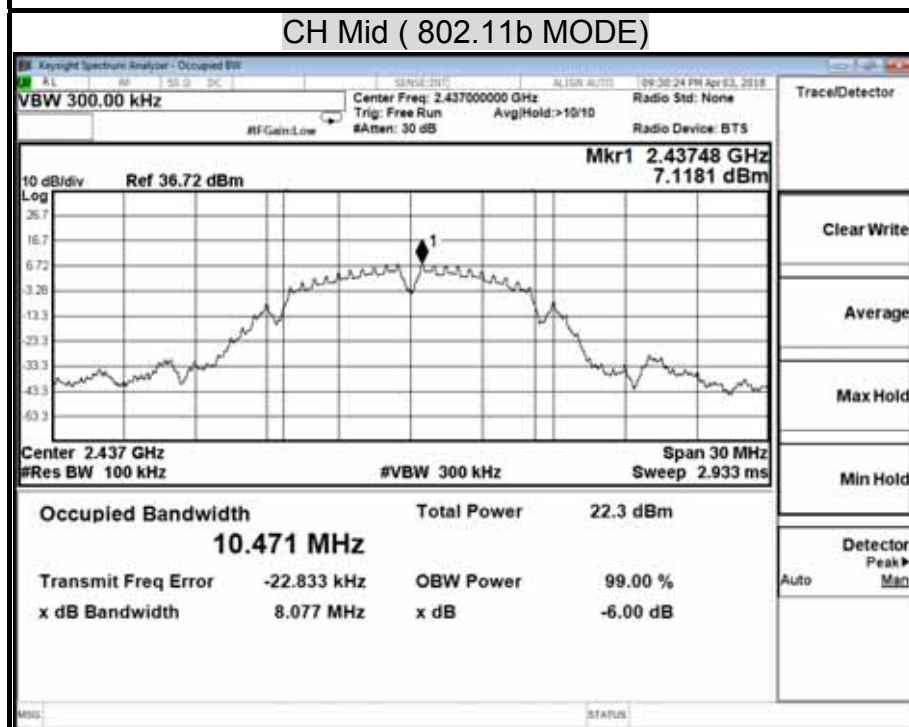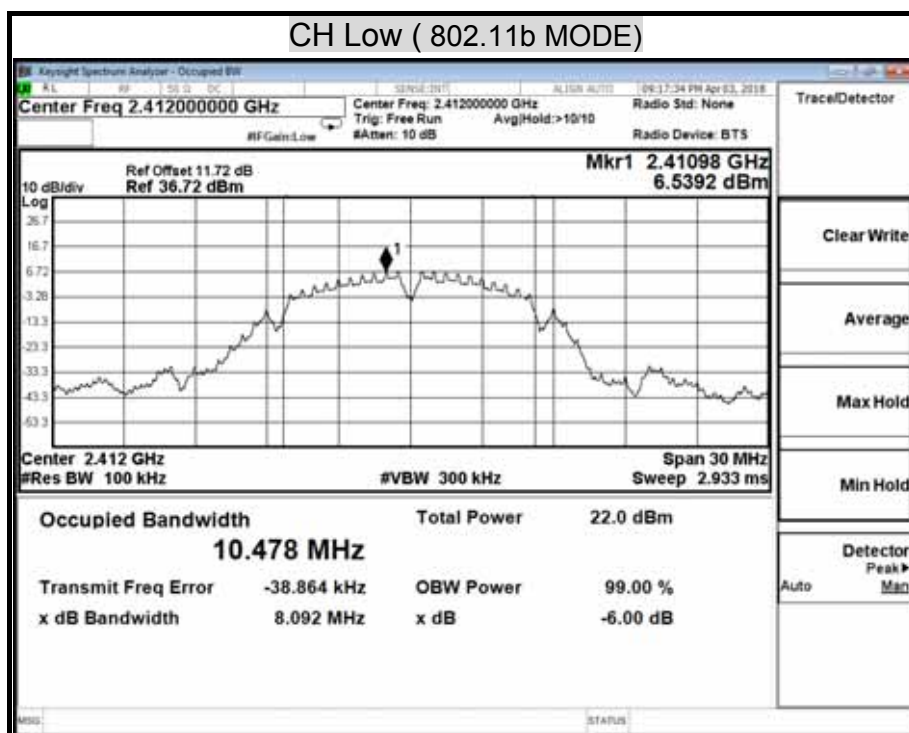


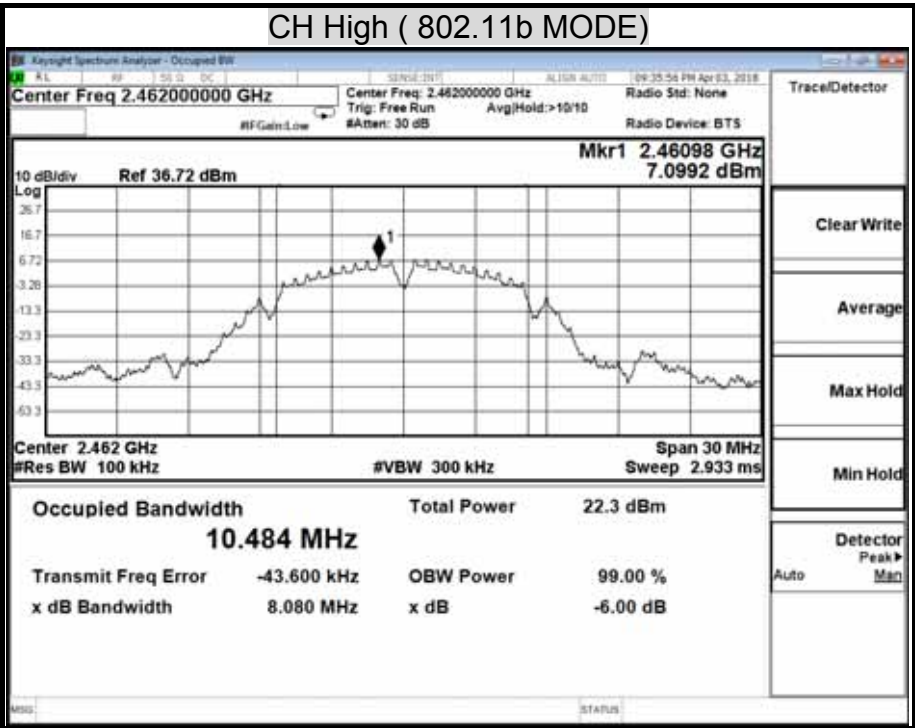



6dB BANDWIDTH (802.11g MODE)

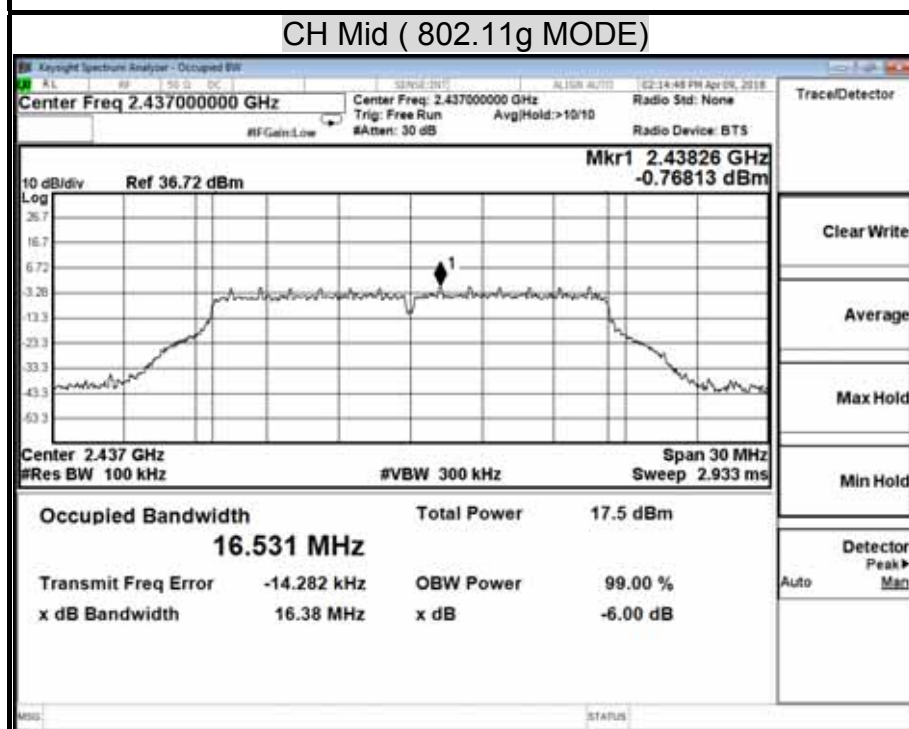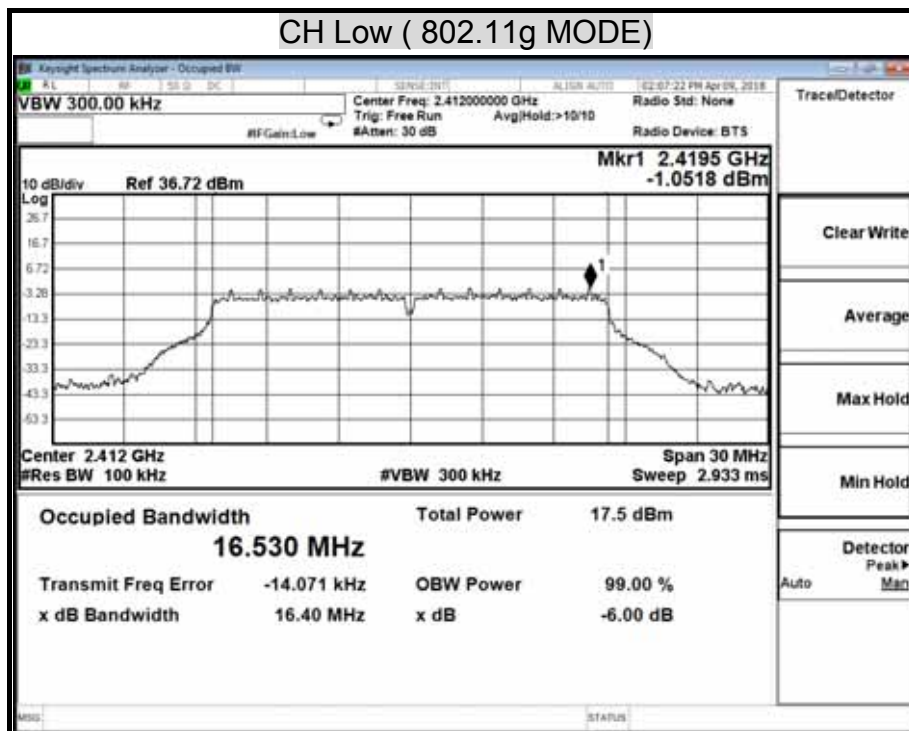


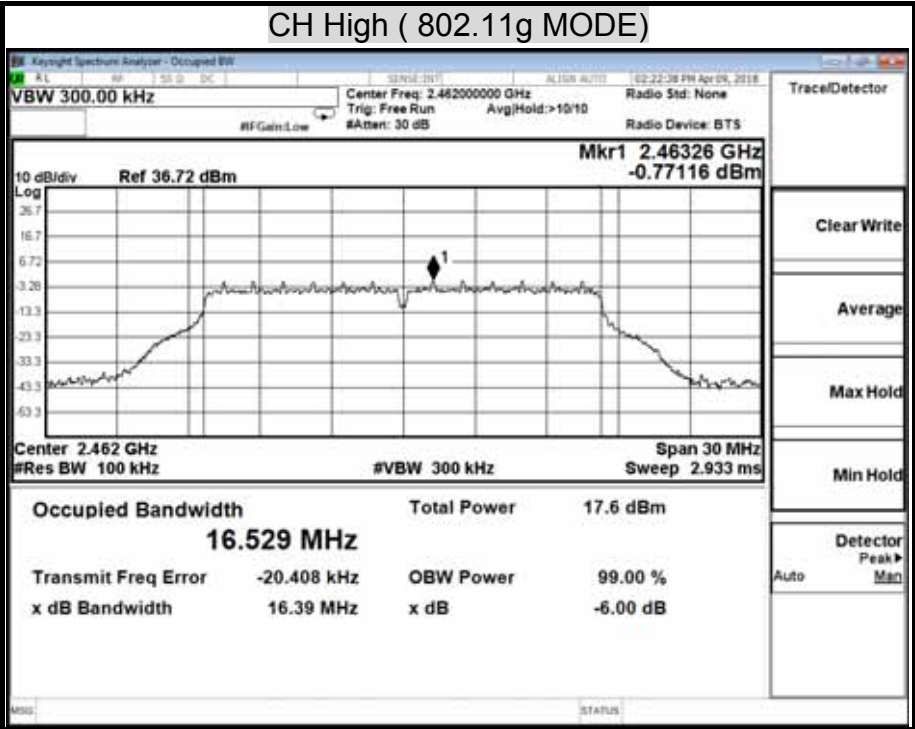



6dB BANDWIDTH (802.11n HT20 MODE)

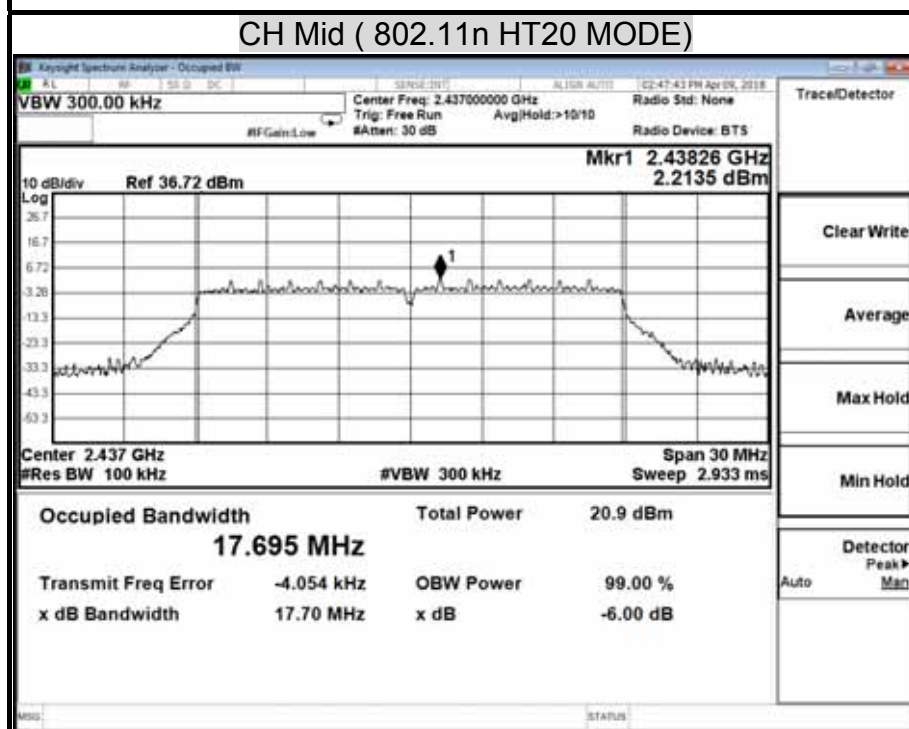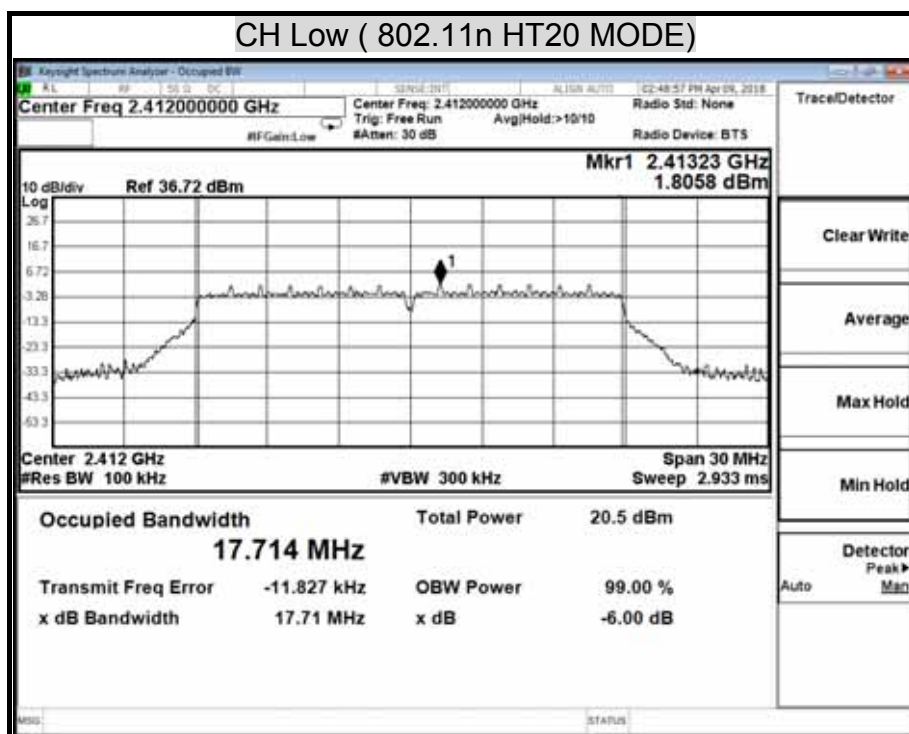

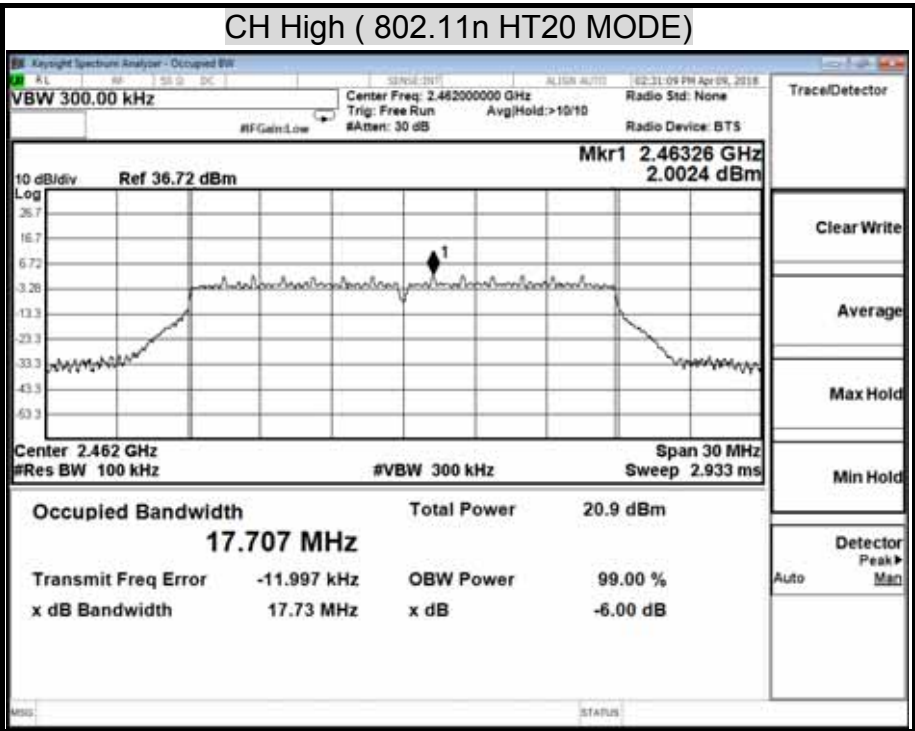

6dB BANDWIDTH (GFSK MODE)

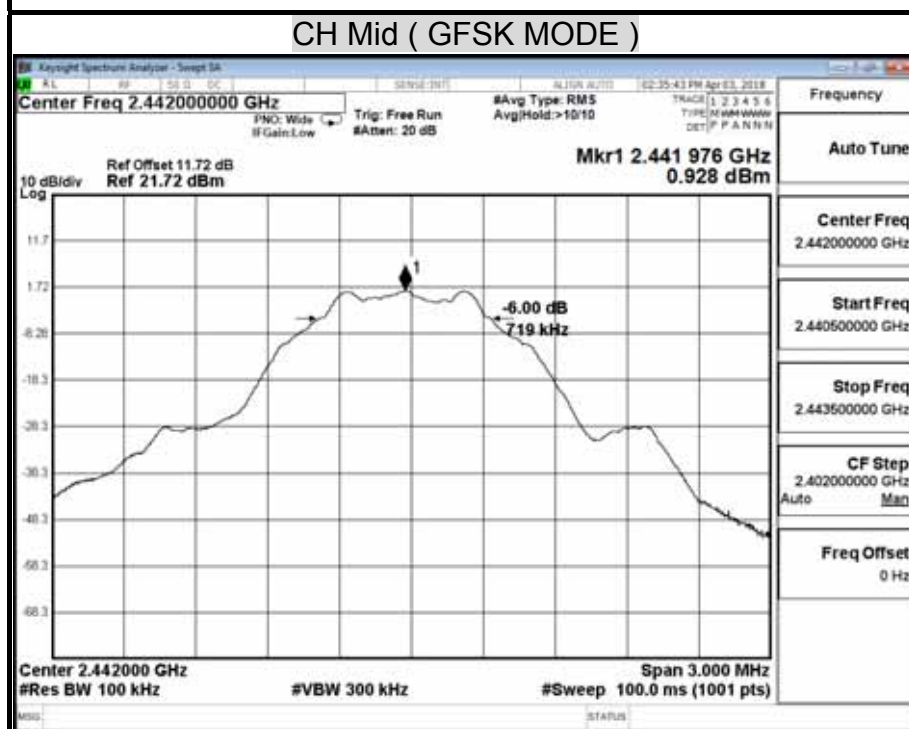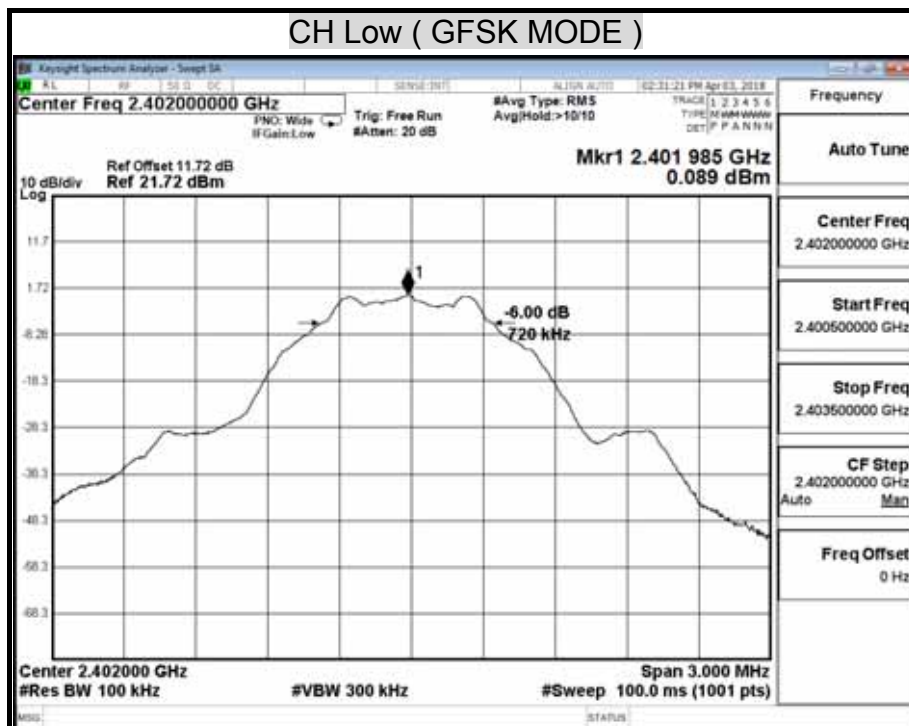

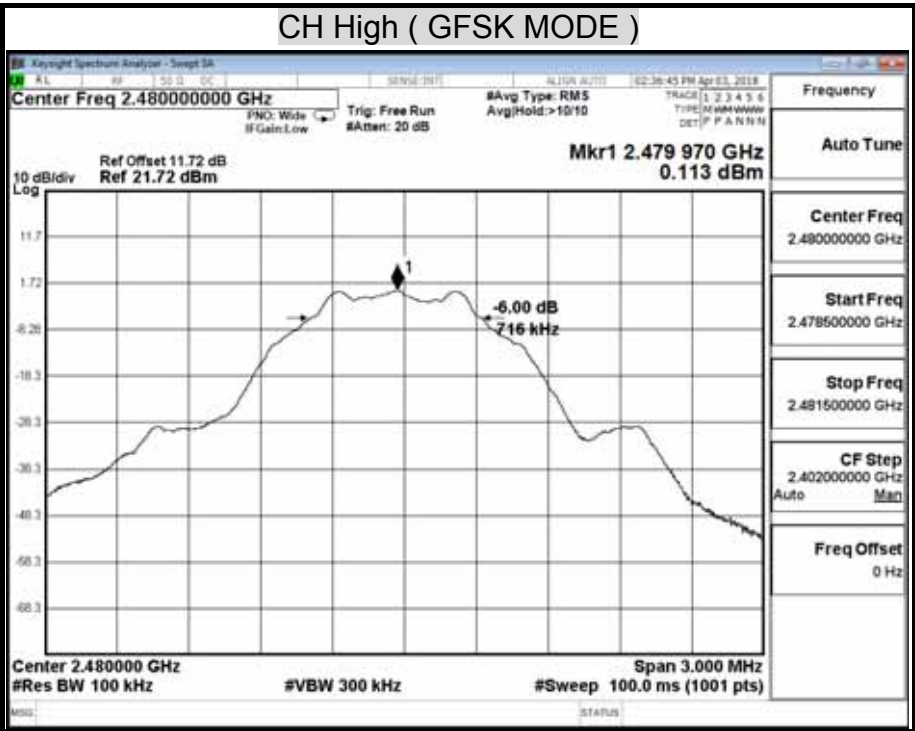

8.2 MAXIMUM PEAK OUTPUT POWER

LIMIT

§ 15.247(b) The maximum peak output power of the intentional radiator shall not exceed the following :

§ 15.247(b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands : 1 watt.

§ 15.247(b) (4) Except as shown in paragraphs (c) of this section , if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2), and (b)(3) of this section , as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST EQUIPMENTS

| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due |
|------------------------------|--------------|---------|---------------|-----------------|
| PSA Series Spectrum Analyzer | Agilent | E4446A | MY43360132 | 06/06/2019 |
| Power Meter | Anritsu | ML2487A | 6K00003888 | 05/01/2019 |

TEST SETUP

For Peak Power



For Average Power



TEST PROCEDURE

The tests were performed in accordance with KDB 558074 5.2.1.2 and 5.2.2.1.

5.2.1.2 Measurement Procedure PK2:

1. Set the RBW = 1 MHz.
2. Set the VBW ≥ 3 RBW
3. Set the span $\geq 1.5 \times$ DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select peak detector). If the instrument does not have a band power function,
9. Sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS bandwidth.

Average Power

Connect the EUT to power meter, set the center frequency of the power meter to the channel center frequency.

TEST RESULTS

No non-compliance noted

| | | | |
|----------------------------|---------------|------------------|------------|
| Model Name | SC5000M PRIME | Test By | Ted Huang |
| Temp & Humidity | 26.2 , 43% | Test Date | 2018/04/03 |

IEEE 802.11b mode

| Channel | Channel Frequency (MHz) | Peak Power (dBm) | Peak Power Limit (dBm) | Pass / Fail |
|---------|-------------------------|------------------|------------------------|-------------|
| Low | 2412 | 17.58 | 30.00 | PASS |
| Middle | 2437 | 17.72 | 30.00 | PASS |
| High | 2462 | 17.70 | 30.00 | PASS |

NOTE :

1. At final test to get the worst-case emission at 1Mbps long.
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11g mode

| Channel | Channel Frequency (MHz) | Peak Power (dBm) | Peak Power Limit (dBm) | Pass / Fail |
|---------|-------------------------|------------------|------------------------|-------------|
| Low | 2412 | 18.27 | 30.00 | PASS |
| Middle | 2437 | 18.54 | 30.00 | PASS |
| High | 2462 | 18.60 | 30.00 | PASS |

NOTE :

1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11n HT20 mode

| Channel | Channel Frequency (MHz) | Peak Power (dBm) | Peak Power Limit (dBm) | Pass / Fail |
|---------|-------------------------|------------------|------------------------|-------------|
| Low | 2412 | 21.34 | 30.00 | PASS |
| Middle | 2437 | 21.98 | 30.00 | PASS |
| High | 2462 | 21.74 | 30.00 | PASS |

NOTE : 1. At final test to get the worst-case emission at 6.5Mbps.
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

| | | | |
|----------------------------|---------------|------------------|------------|
| Model Name | SC5000M PRIME | Test By | Ted Huang |
| Temp & Humidity | 26.2 , 43% | Test Date | 2018/04/03 |

Bluetooth 4.0 (GFSK) mode

| Channel | Channel Frequency (MHz) | Peak Power (dBm) | Peak Power Limit (dBm) | Pass / Fail |
|---------|-------------------------|------------------|------------------------|-------------|
| Low | 2402 | 0.55 | 30.00 | PASS |
| Middle | 2442 | 1.49 | 30.00 | PASS |
| High | 2480 | 0.80 | 30.00 | PASS |

NOTE : 1. At final test to get the worst-case emission at 1Mbps.
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

Average Power Data

IEEE 802.11b mode

| Channel | Channel Frequency (MHz) | Average Power (dBm) |
|---------|-------------------------|---------------------|
| Low | 2412 | 14.48 |
| Middle | 2437 | 14.74 |
| High | 2462 | 14.68 |

IEEE 802.11g mode

| Channel | Channel Frequency (MHz) | Average Power (dBm) |
|---------|-------------------------|---------------------|
| Low | 2412 | 9.94 |
| Middle | 2437 | 10.22 |
| High | 2462 | 10.11 |



IEEE 802.11n HT20 mode


| Channel | Channel Frequency (MHz) | Average Power (dBm) |
|---------|-------------------------|---------------------|
| | | Chain 0 |
| Low | 2412 | 12.42 |
| Middle | 2437 | 12.71 |
| High | 2462 | 12.69 |

Bluetooth 4.0 (GFSK) mode



| Channel | Channel Frequency (MHz) | Average Power (dBm) |
|---------|-------------------------|---------------------|
| Low | 2402 | -1.87 |
| Middle | 2442 | -0.91 |
| High | 2480 | -1.70 |


MAXIMUM PEAK OUTPUT POWER (802.11b MODE)

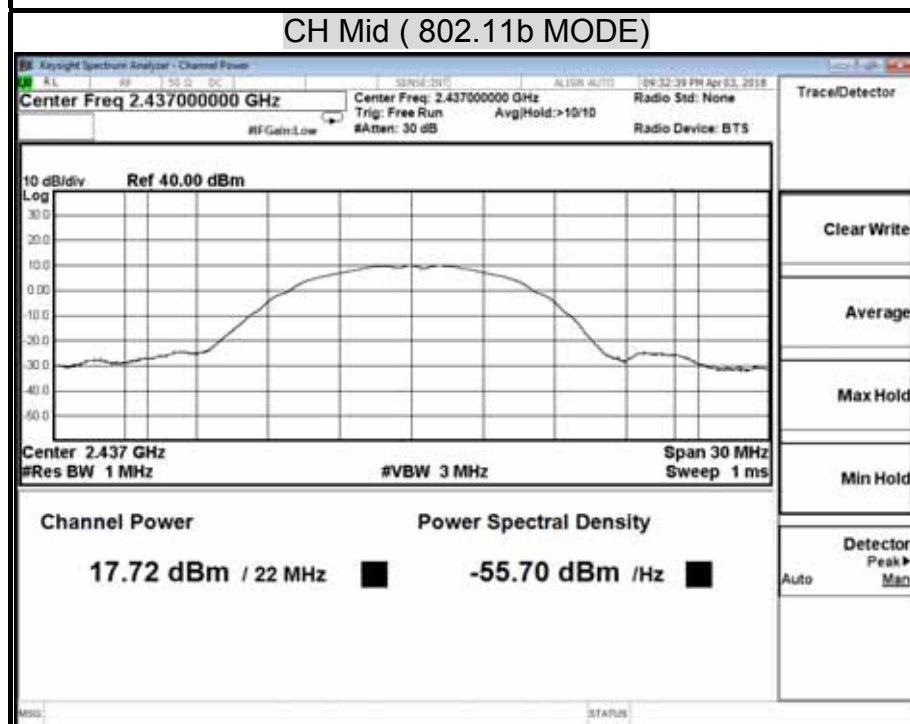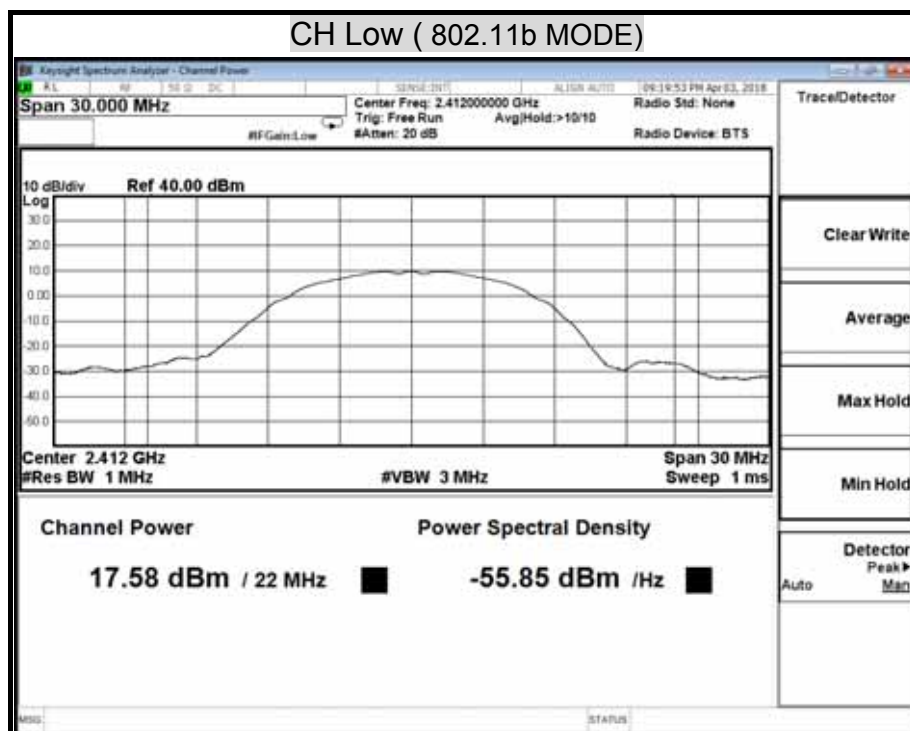


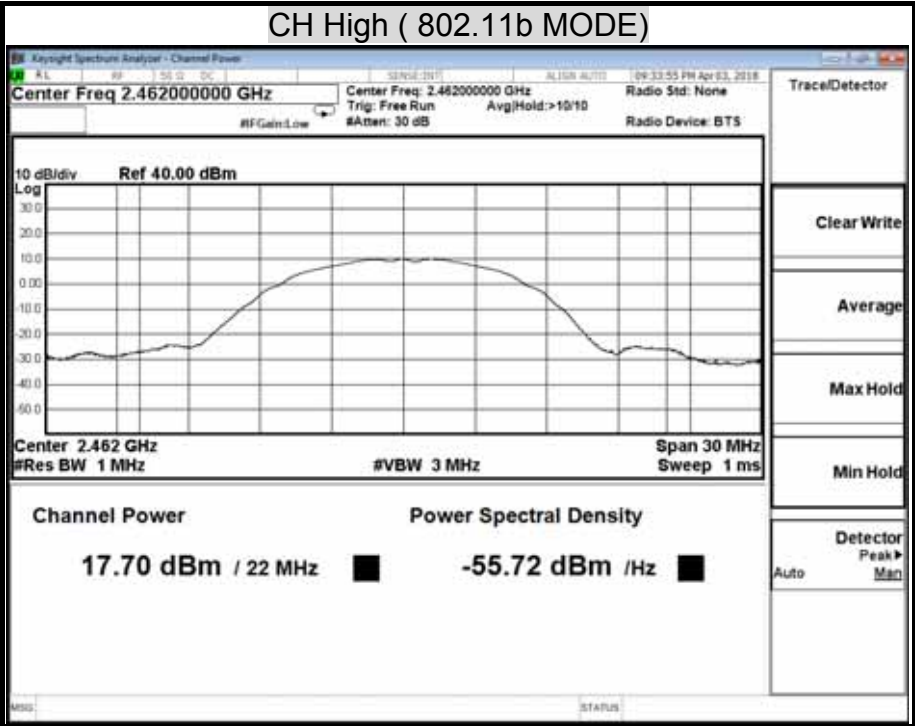



MAXIMUM PEAK OUTPUT POWER (802.11g MODE)

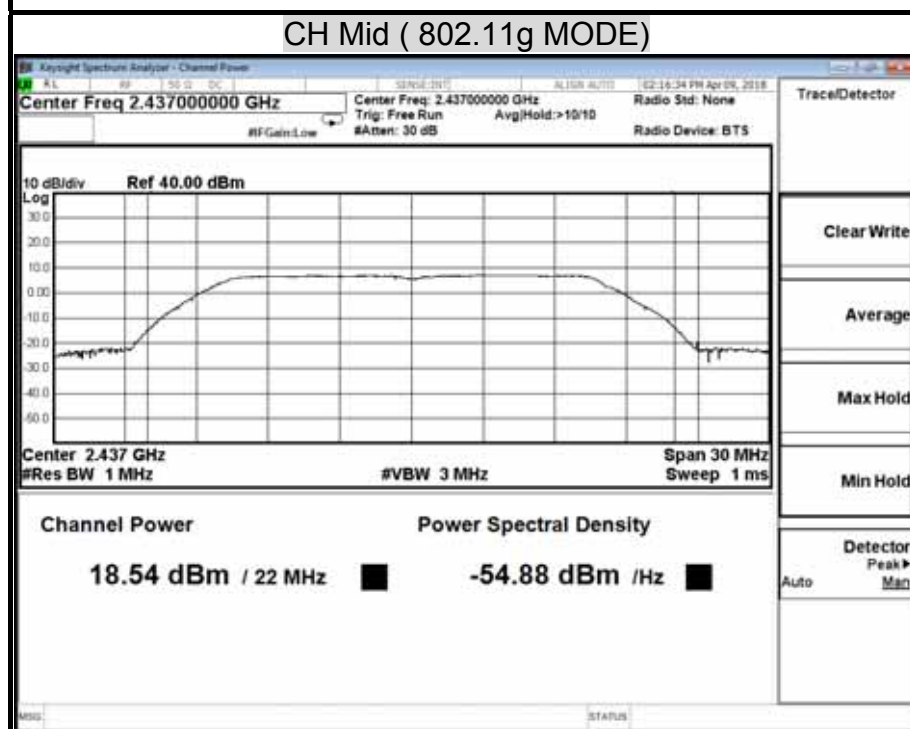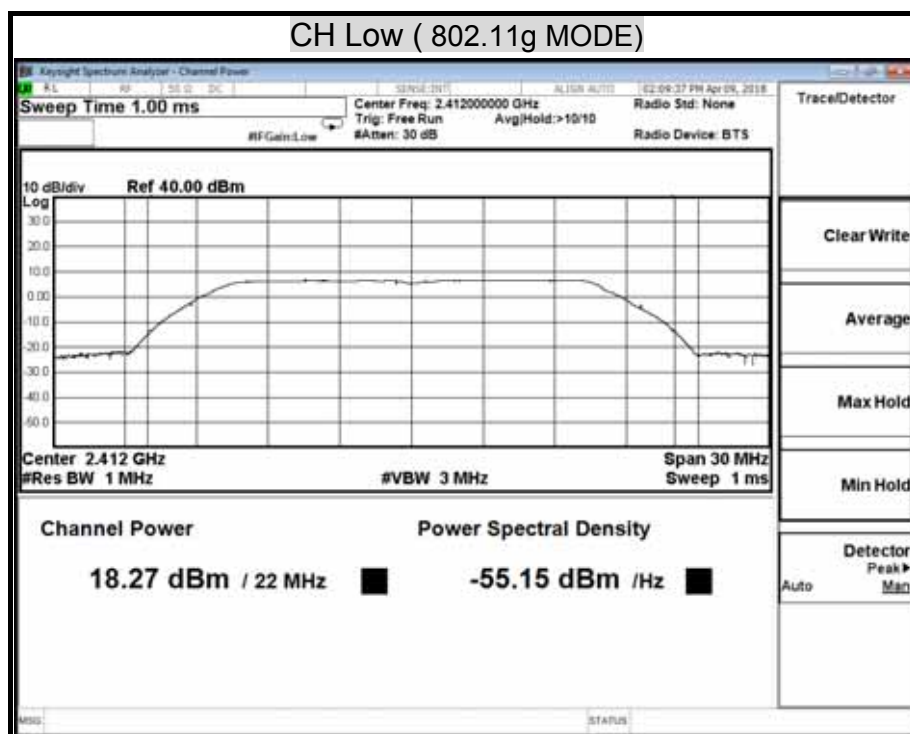

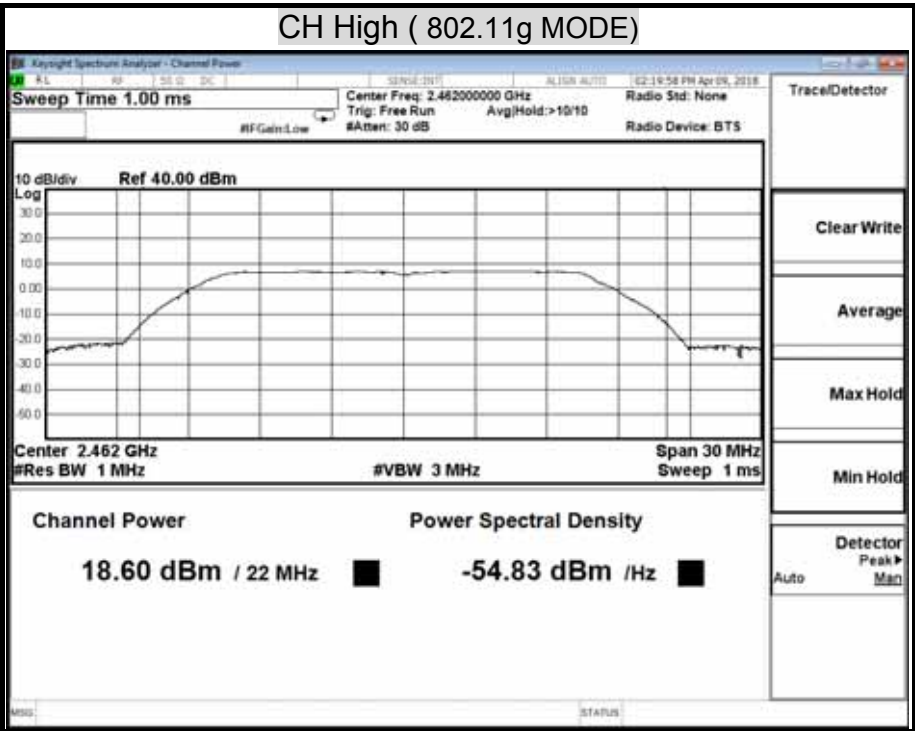



MAXIMUM PEAK OUTPUT POWER (802.11n HT20 MODE)

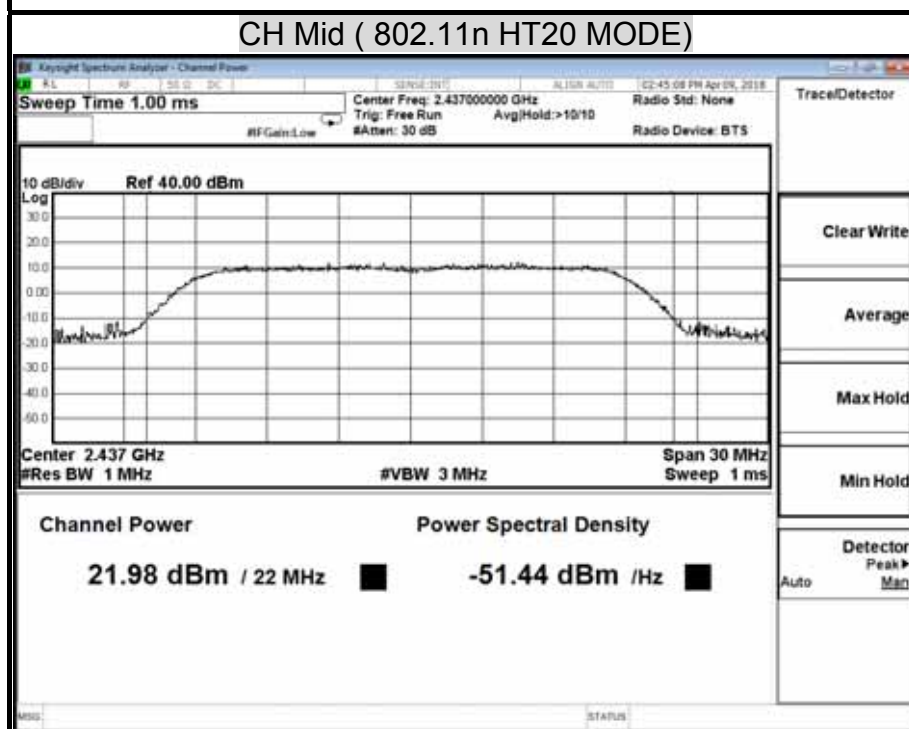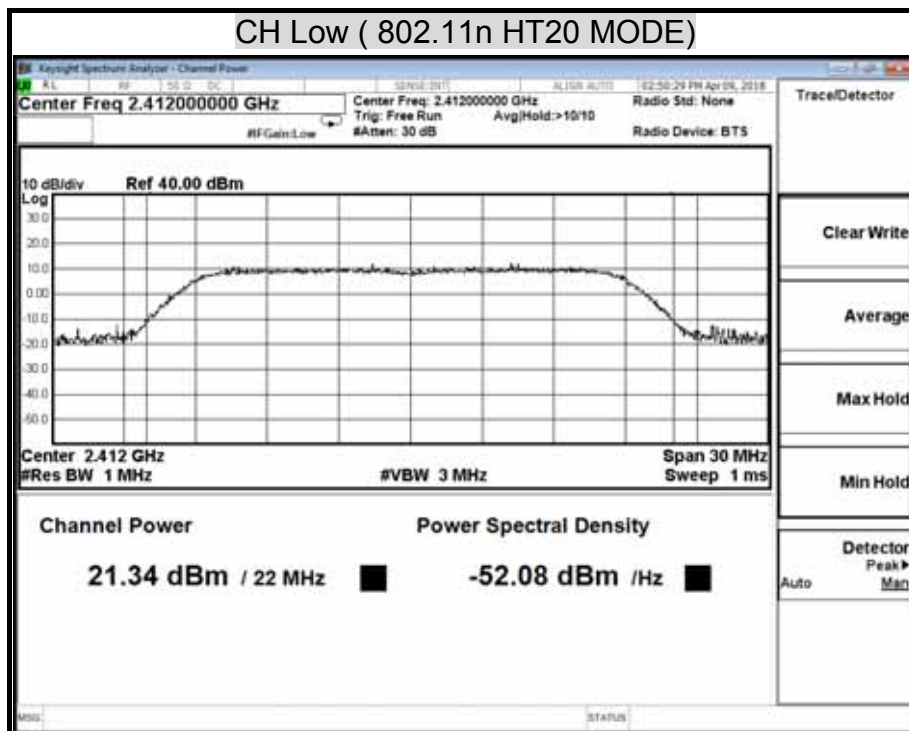


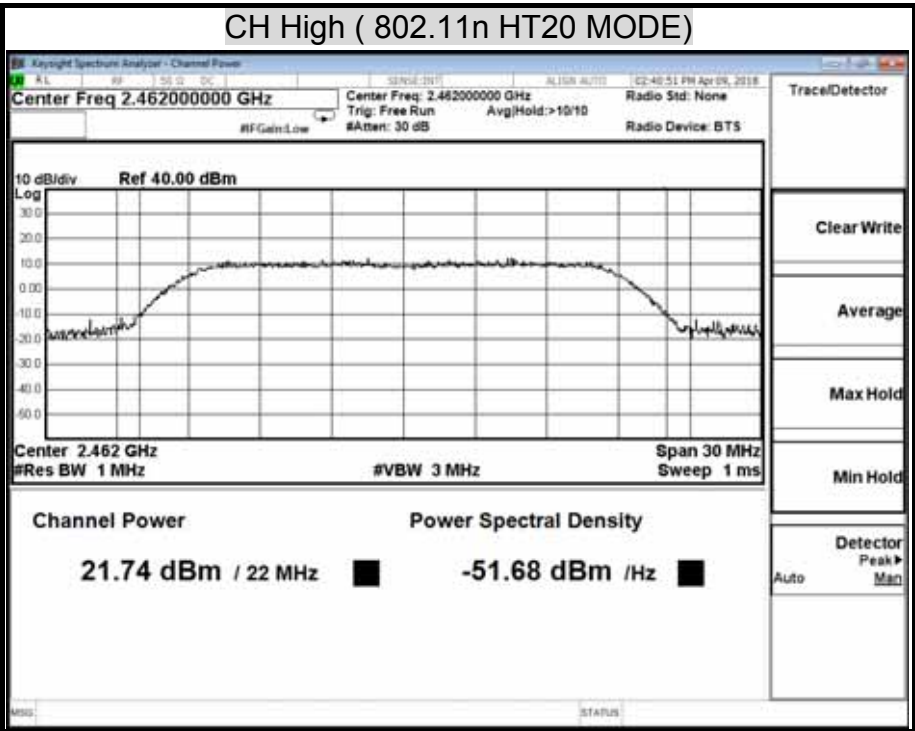



MAXIMUM PEAK OUTPUT POWER (GFSK MODE)

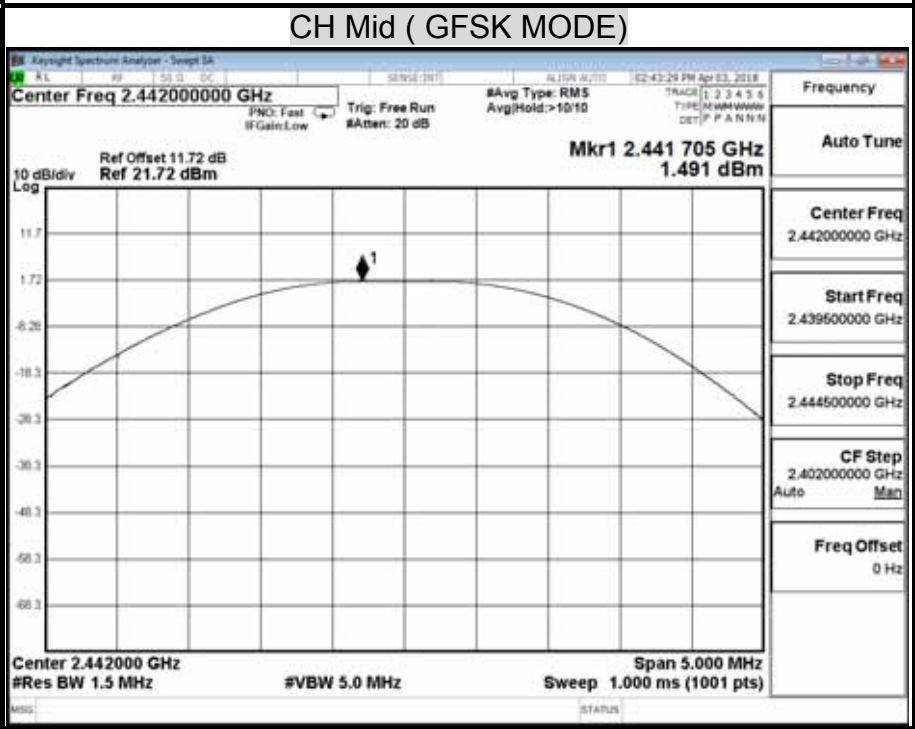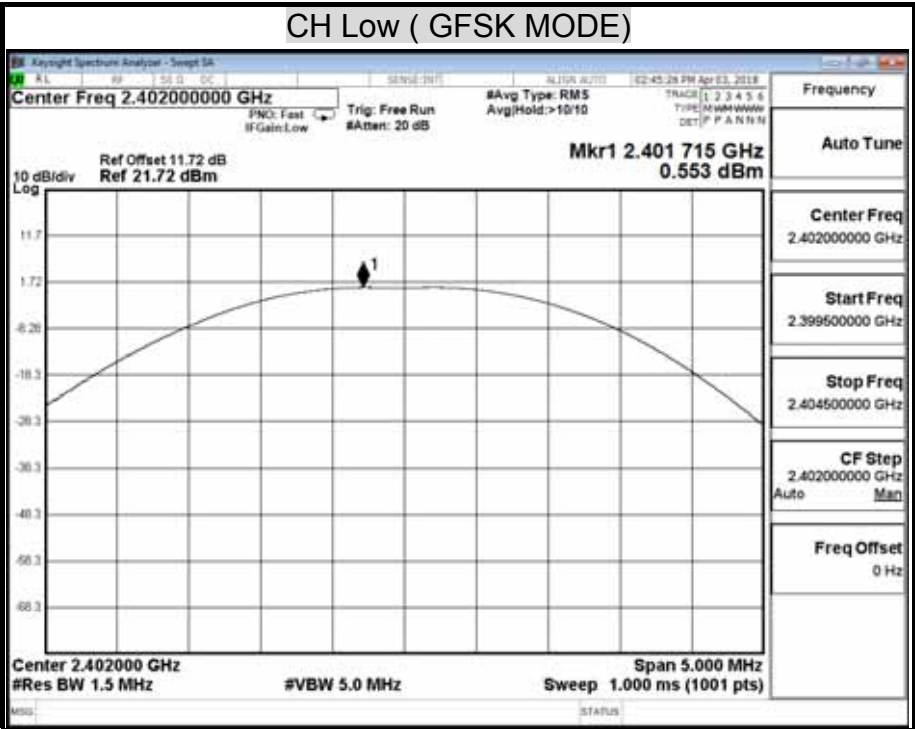

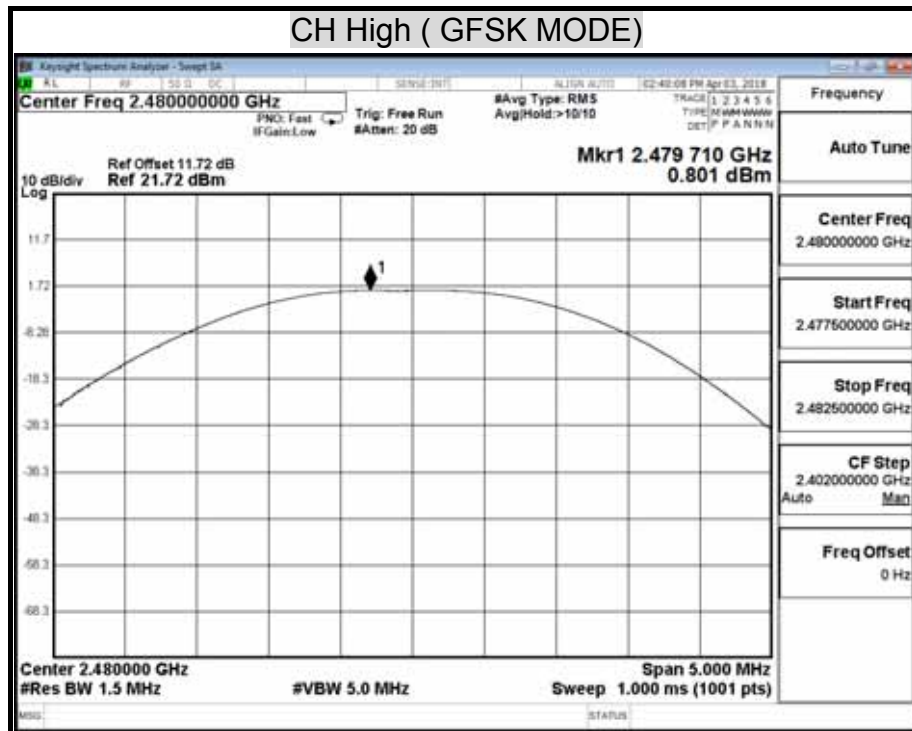

8.3 DUTY CYCLE

LIMIT

Nil (No dedicated limit specified in the Rules)

TEST EQUIPMENT

| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due |
|------------------------------|--------------|--------|---------------|-----------------|
| PSA Series Spectrum Analyzer | Agilent | E4446A | MY43360132 | 06/06/2019 |

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set RBW \geq OBW if possible; otherwise, set RBW to the largest available value. Set VBW \geq RBW. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

TEST RESULTS

No non-compliance noted.

TEST DATA

WIFI

| | | | |
|----------------------------|---------------|------------------|------------|
| Model Name | SC5000M PRIME | Test By | Ted Huang |
| Temp & Humidity | 26.2 , 43% | Test Date | 2018/04/03 |

B MODE

| | us | Times | Ton | Total Ton time(ms) |
|------|------------|-------|--------|--------------------|
| Ton1 | 100000.000 | 1 | 100000 | |
| Ton2 | | 0 | 0 | |
| Ton3 | | | 0 | 100 |
| Tp | | | | 100 |

| | |
|---------------------|-----|
| Ton | 100 |
| Tp(Ton+Toff) | 100 |
| Duty Cycle | 1 |
| $10 * \log (1/x) =$ | 0 |

G MODE

| | us | Times | Ton | Total Ton time(ms) |
|------|------------|-------|--------|--------------------|
| Ton1 | 100000.000 | 1 | 100000 | |
| Ton2 | | 0 | 0 | |
| Ton3 | | | 0 | 100 |
| Tp | | | | 100 |

| | |
|---------------------|-----|
| Ton | 100 |
| Tp(Ton+Toff) | 100 |
| Duty Cycle | 1 |
| $10 * \log (1/x) =$ | 0 |



HT20 MODE


| | us | Times | Ton | Total Ton time(ms) |
|------|------------|-------|--------|--------------------|
| Ton1 | 100000.000 | 1 | 100000 | |
| Ton2 | | 0 | 0 | |
| Ton3 | | | 0 | 100 |
| Tp | | | | 100 |



| | |
|---------------------|-----|
| Ton | 100 |
| Tp(Ton+Toff) | 100 |
| Duty Cycle | 1 |
| $10 * \log (1/x) =$ | 0 |






TEST PLOT
Plot

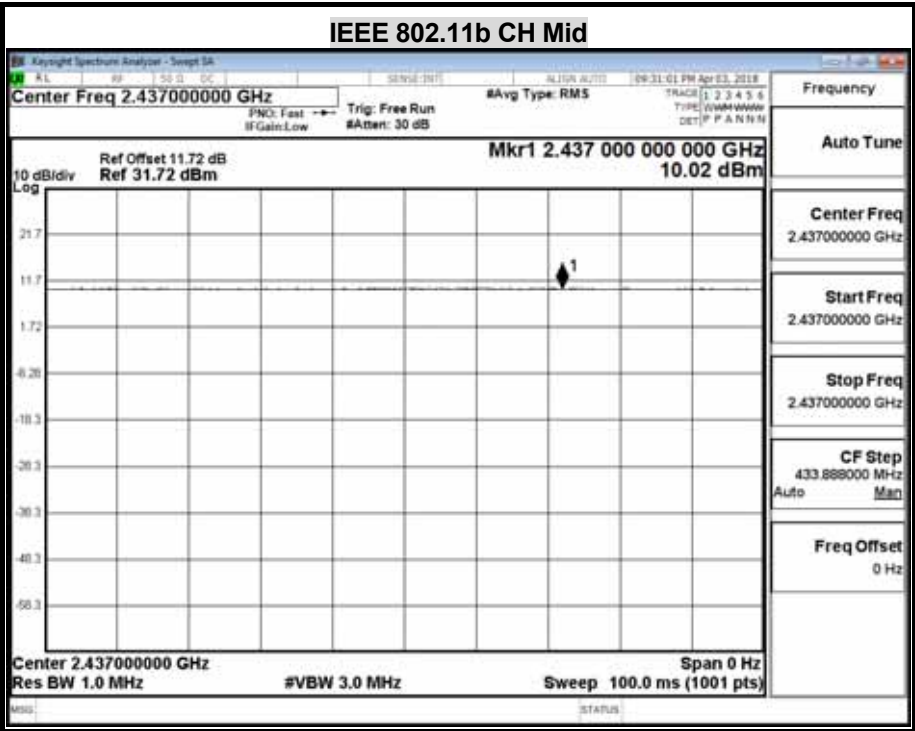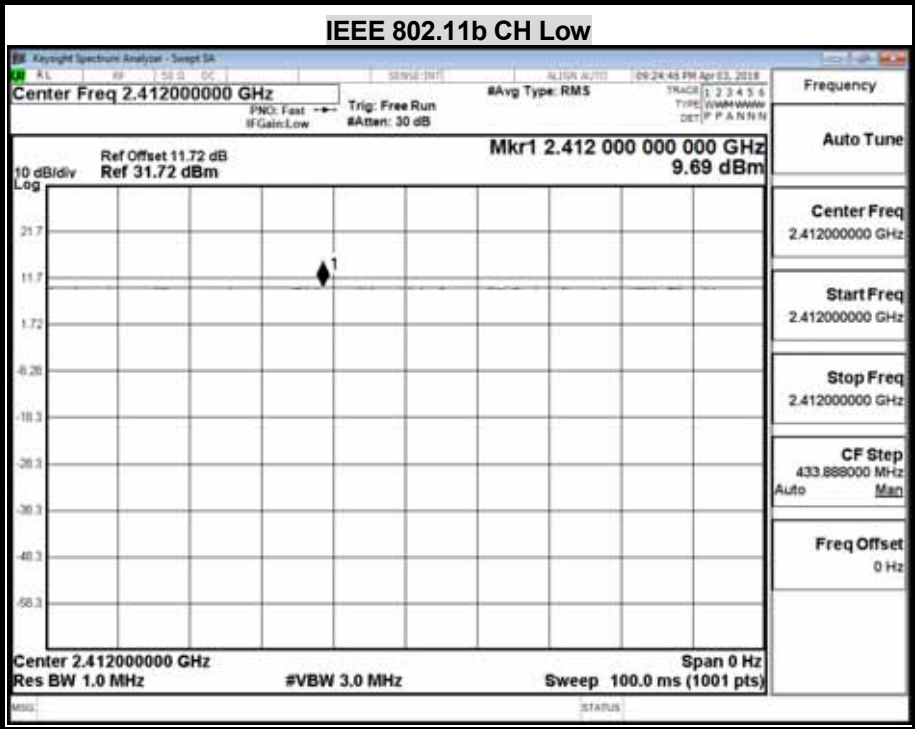


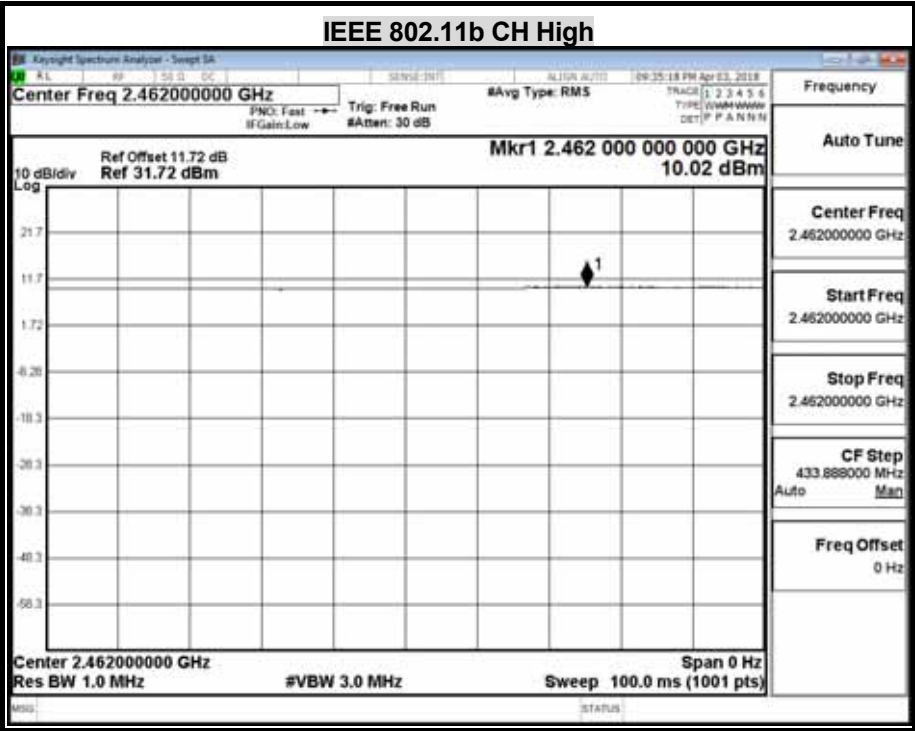

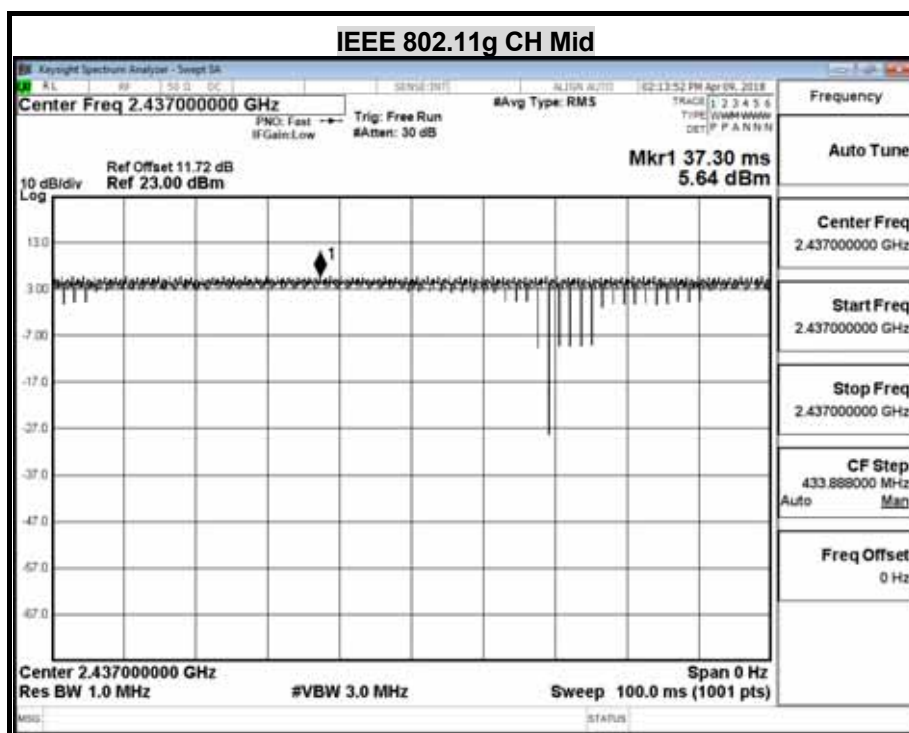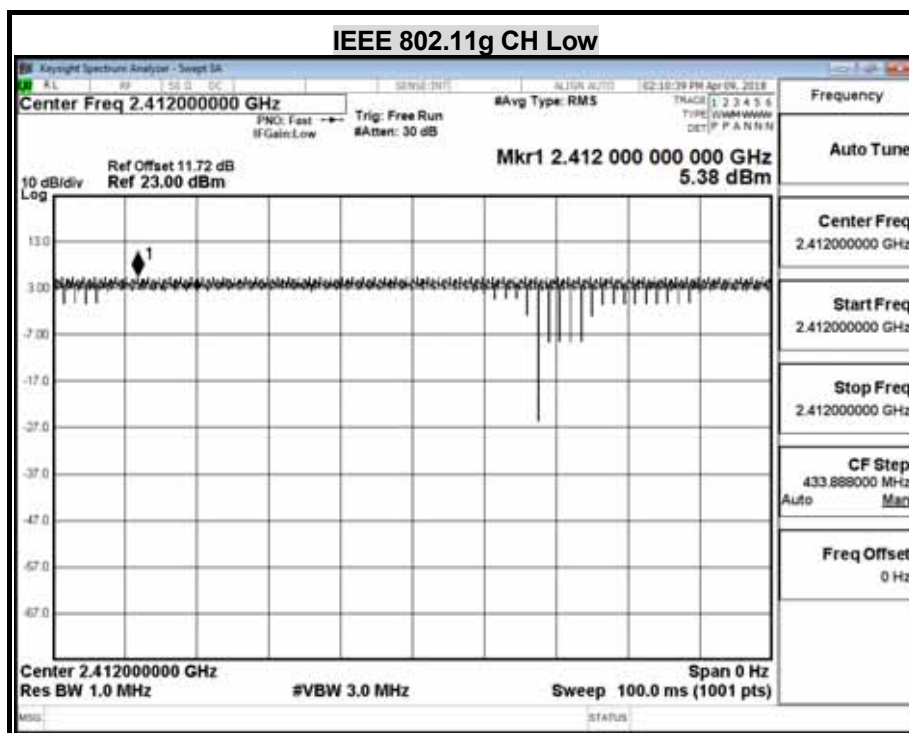

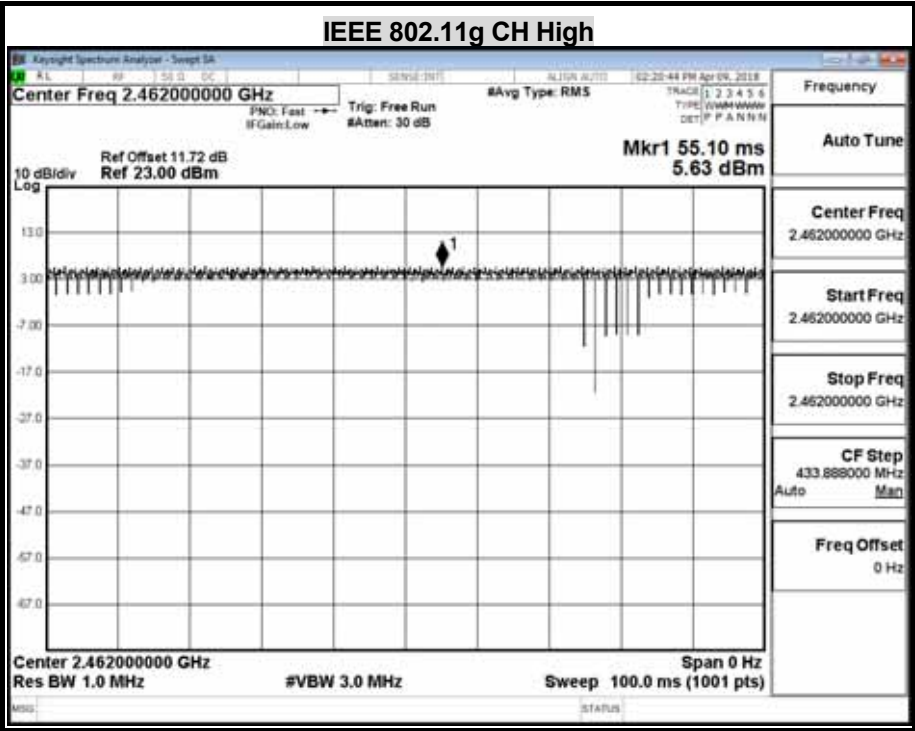

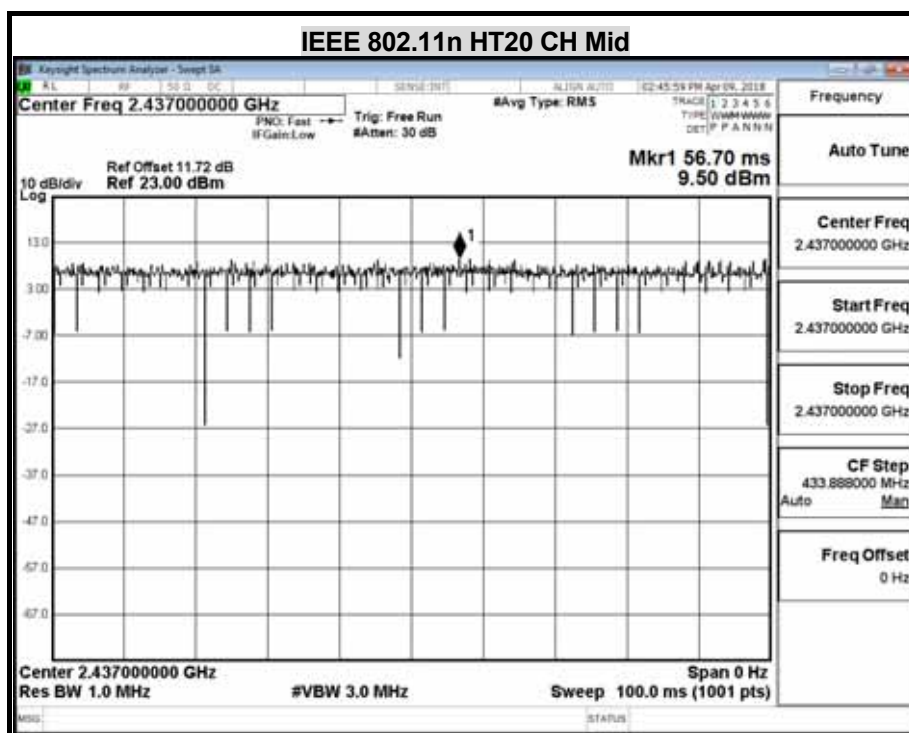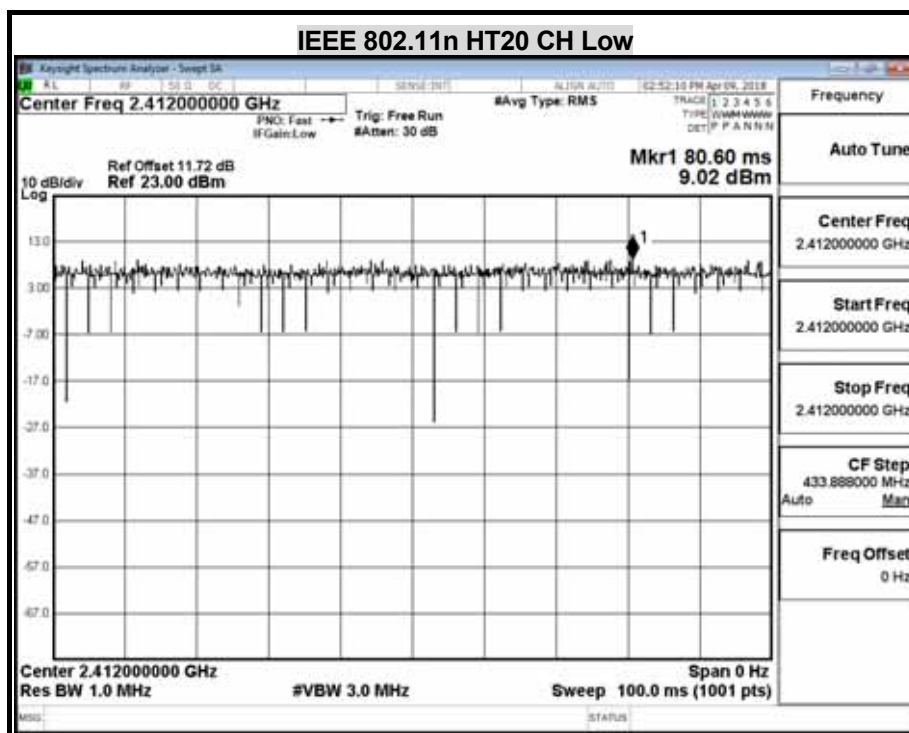

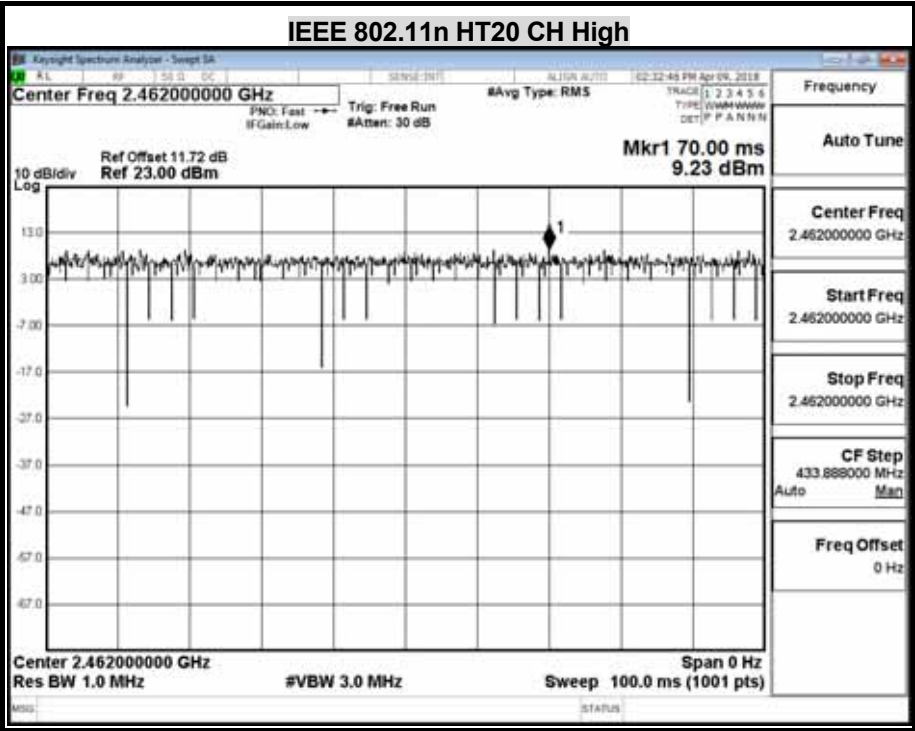



Bluetooth 4.0:


| | | | |
|----------------------------|---------------|------------------|------------|
| Model Name | SC5000M PRIME | Test By | Ted Huang |
| Temp & Humidity | 26.2 , 43% | Test Date | 2018/04/03 |

| | us | Times | Ton | Total Ton time(ms) |
|------|---------|-------|---------|--------------------|
| Ton1 | 390.000 | 1 | 390.000 | 0.39 |
| Ton2 | | 0 | 0 | |
| Ton3 | | | 0 | |
| Tp | | | | 0.626 |

| | |
|---------------------|-------------|
| Ton | 0.39 |
| Tp(Ton+Toff) | 0.626 |
| Duty Cycle | 0.623003195 |
| $10 * \log (1/x) =$ | 2.055097262 |

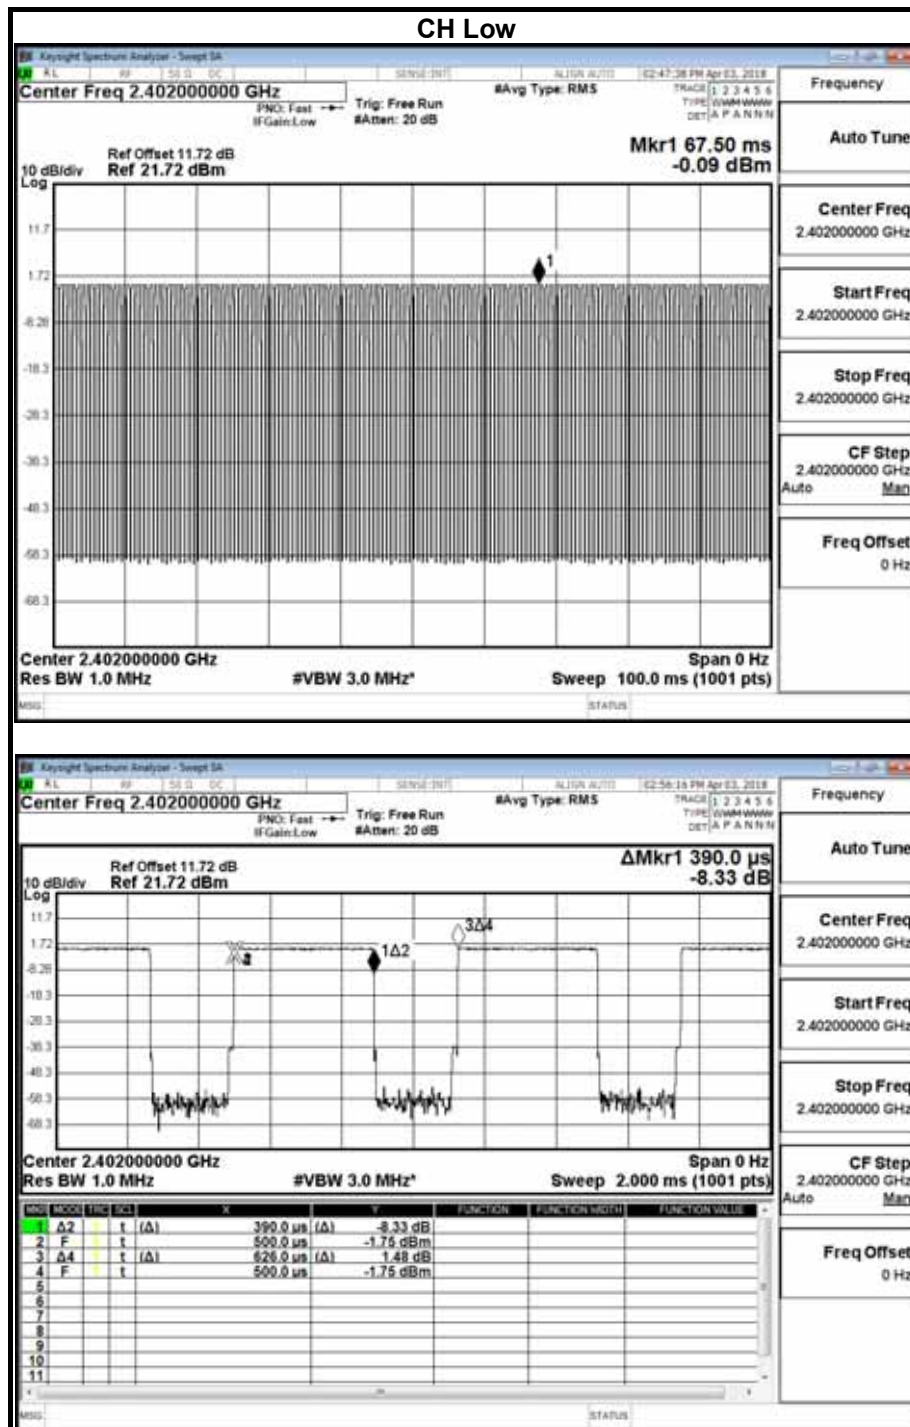Plot

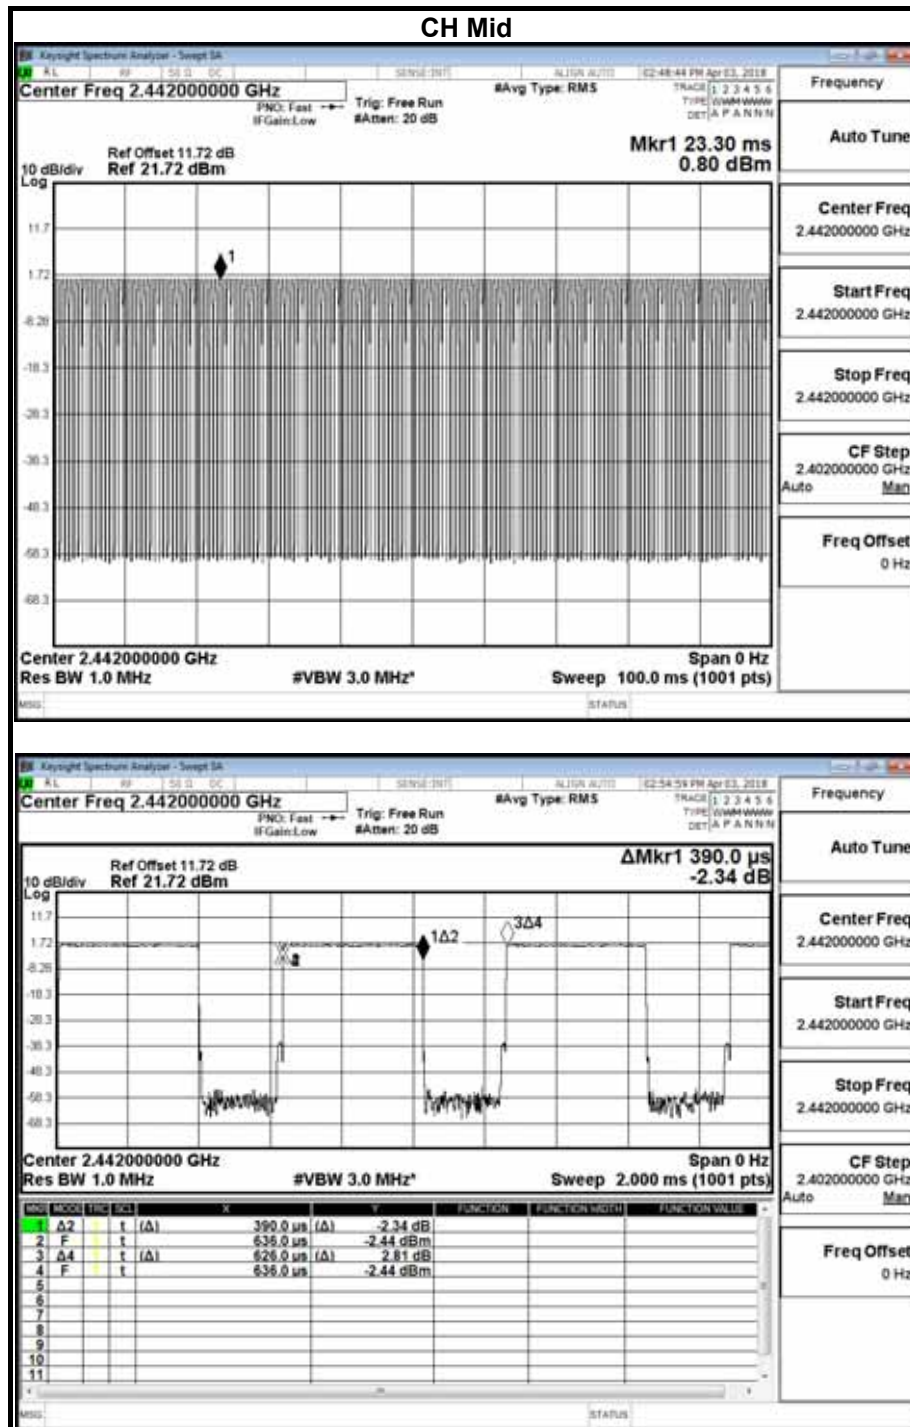

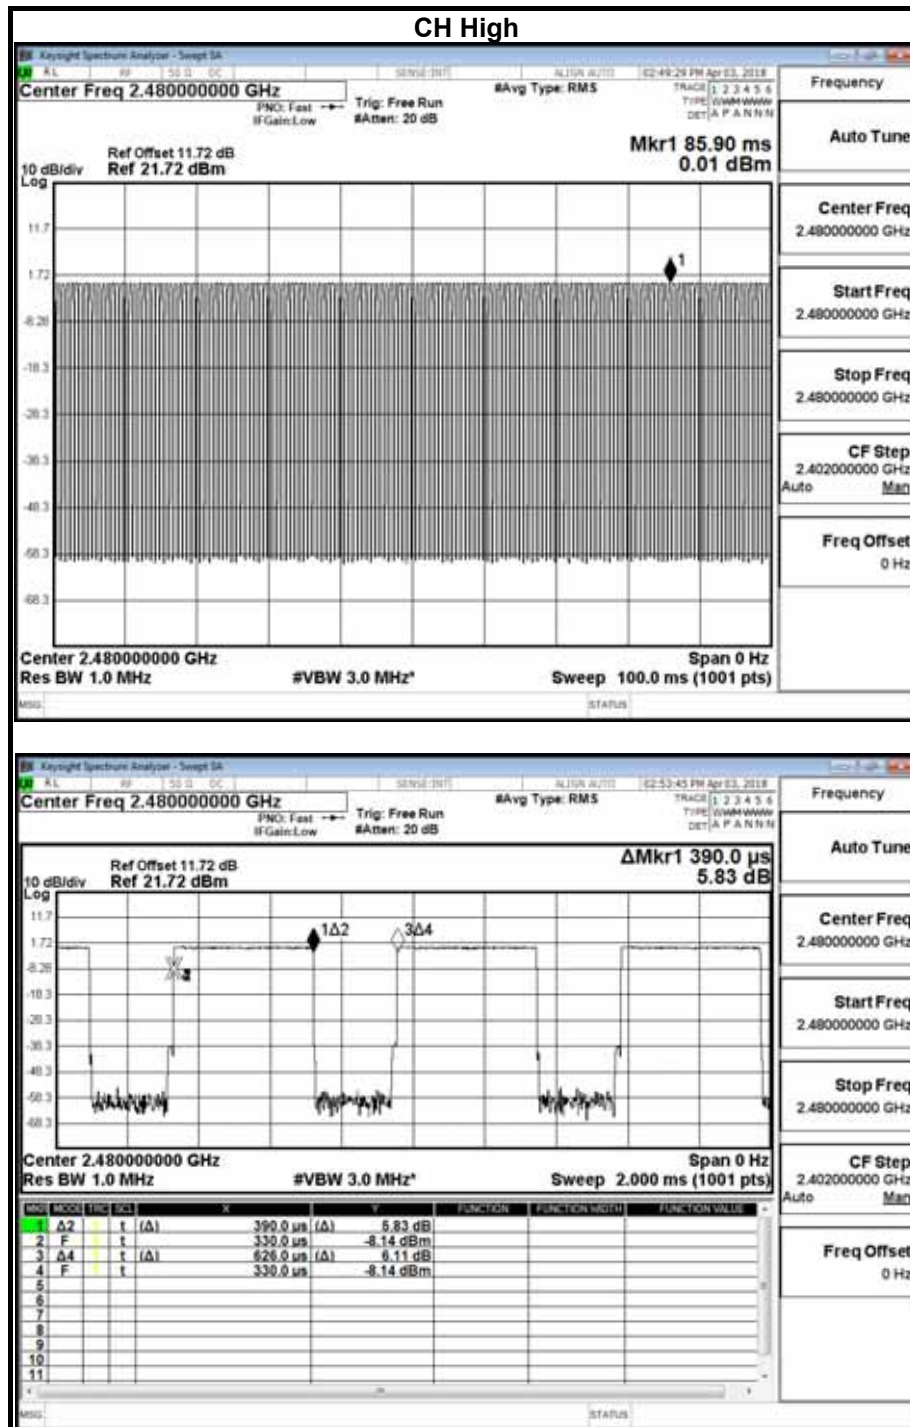

8.4 POWER SPECTRAL DENSITY


LIMIT

§ 15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST EQUIPMENTS

| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due |
|------------------------------|--------------|--------|---------------|-----------------|
| PSA Series Spectrum Analyzer | Agilent | E4446A | MY43360132 | 06/06/2019 |

TEST SETUP

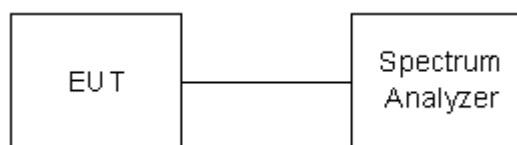

TEST PROCEDURE

The tests were performed in accordance with KDB 558074 5.3.1.

5.3.1 Measurement Procedure PKPSD:

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the *DTS bandwidth*.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



TEST RESULTS

| | | | |
|-----------------|---------------|-----------|------------|
| Model Name | SC5000M PRIME | Test By | Ted Huang |
| Temp & Humidity | 26.2 , 43% | Test Date | 2018/04/03 |

IEEE 802.11b mode

| Channel | Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Margin (dB) | Pass / Fail |
|---------|--------------------|---------------|----------------|----------------|-------------|
| Low | 2412 | 6.54 | 8.00 | -1.46 | PASS |
| Middle | 2437 | 7.12 | 8.00 | -0.88 | PASS |
| High | 2462 | 7.10 | 8.00 | -0.90 | PASS |

NOTE : 1. At final test to get the worst-case emission at 1long Mbps long.
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11g mode

| Channel | Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Margin (dB) | Pass / Fail |
|---------|--------------------|---------------|----------------|----------------|-------------|
| Low | 2412 | -1.05 | 8.00 | -9.05 | PASS |
| Middle | 2437 | -0.77 | 8.00 | -8.77 | PASS |
| High | 2462 | -0.77 | 8.00 | -8.77 | PASS |

NOTE : 1. At final test to get the worst-case emission at 6Mbps long.
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11n HT20 mode

| Channel | Frequency (MHz) | PPSD Chain0 (dBm) | Limit (dBm) | Margin (dB) | Pass / Fail |
|---------|--------------------|-------------------------|----------------|----------------|-------------|
| Low | 2412 | 1.81 | 8.00 | -6.19 | PASS |
| Middle | 2437 | 2.21 | 8.00 | -5.79 | PASS |
| High | 2462 | 2.00 | 8.00 | -6.00 | PASS |

NOTE : 1. At final test to get the worst-case emission at 6.5Mbps long.
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

| | | | |
|----------------------------|---------------|------------------|------------|
| Model Name | SC5000M PRIME | Test By | Ted Huang |
| Temp & Humidity | 26.2 , 43% | Test Date | 2018/04/03 |



Bluetooth 4.0 (GFSK) mode


| Channel | Frequency (MHz) | PPSD Chain0 (dBm) | Limit (dBm) | Margin (dB) | Pass / Fail |
|---------|--------------------|-------------------------|----------------|----------------|-------------|
| Low | 2402 | 0.09 | 8.00 | -7.91 | PASS |
| Middle | 2442 | 0.93 | 8.00 | -7.07 | PASS |
| High | 2480 | 0.11 | 8.00 | -7.89 | PASS |

NOTE :



1. At final test to get the worst-case emission at 1Mbps long.
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.


POWER SPECTRAL DENSITY (IEEE 802.11b MODE)

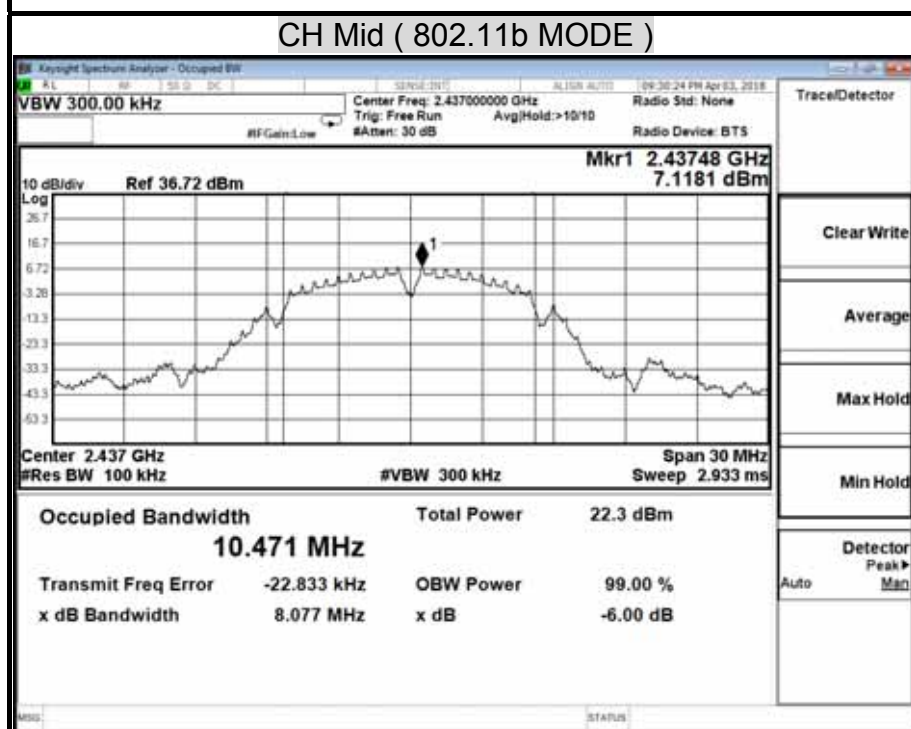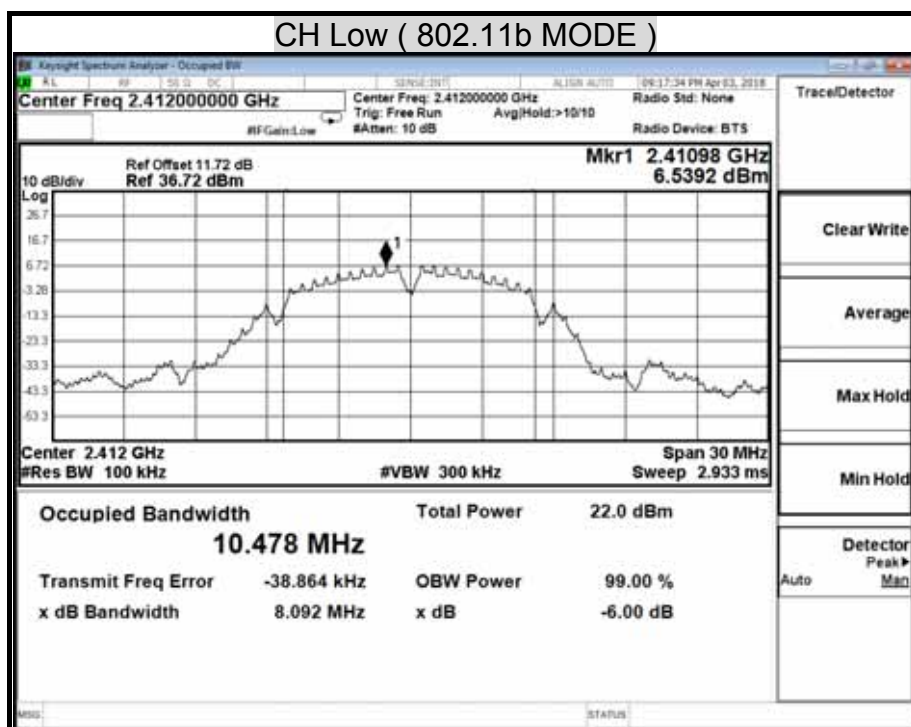


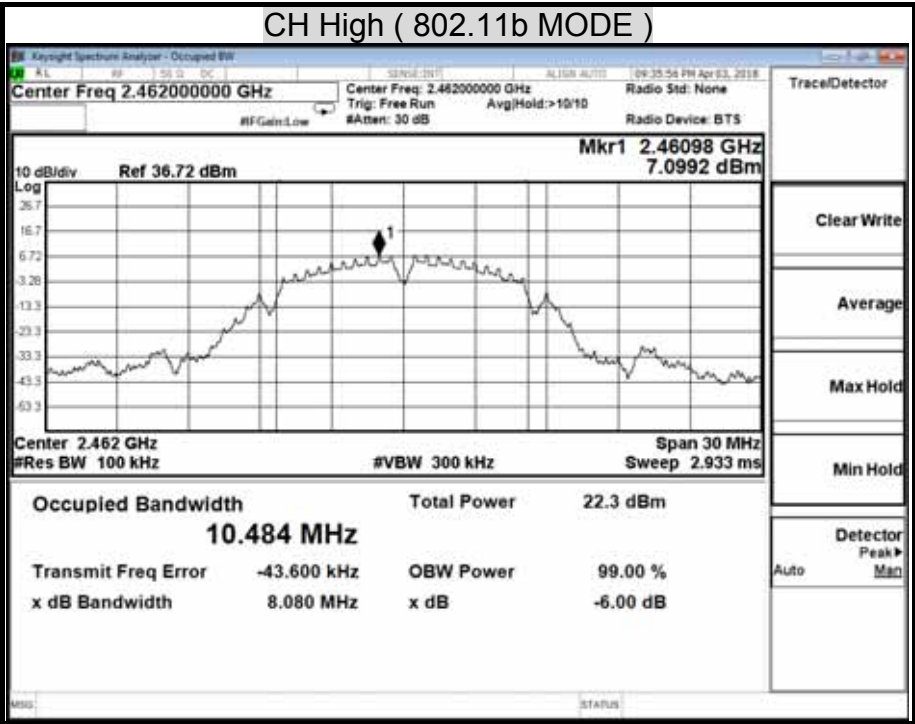



POWER SPECTRAL DENSITY (IEEE 802.11g MODE)

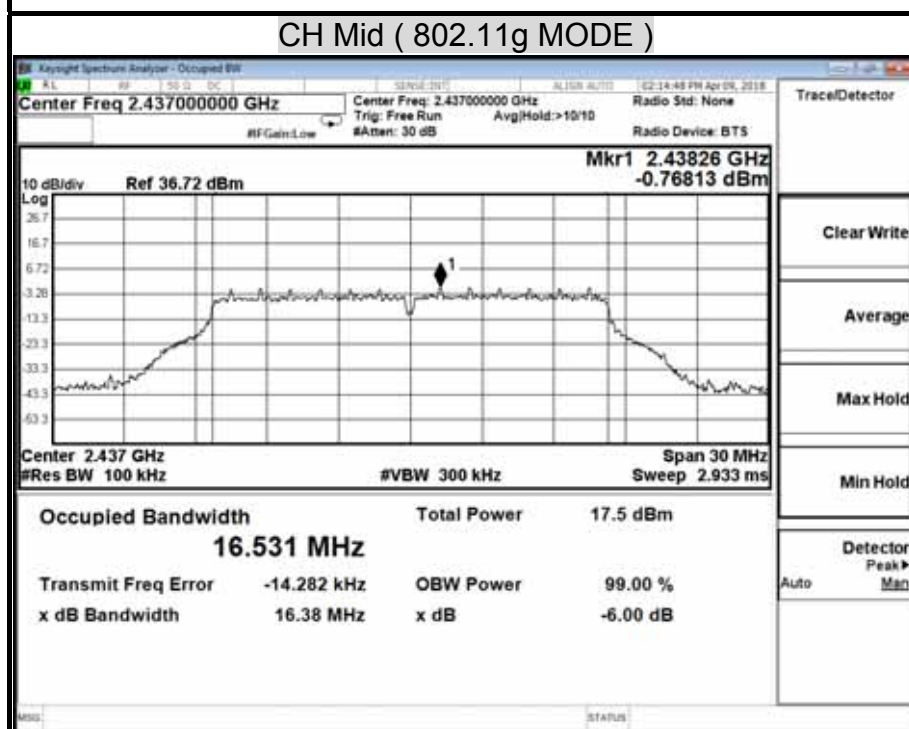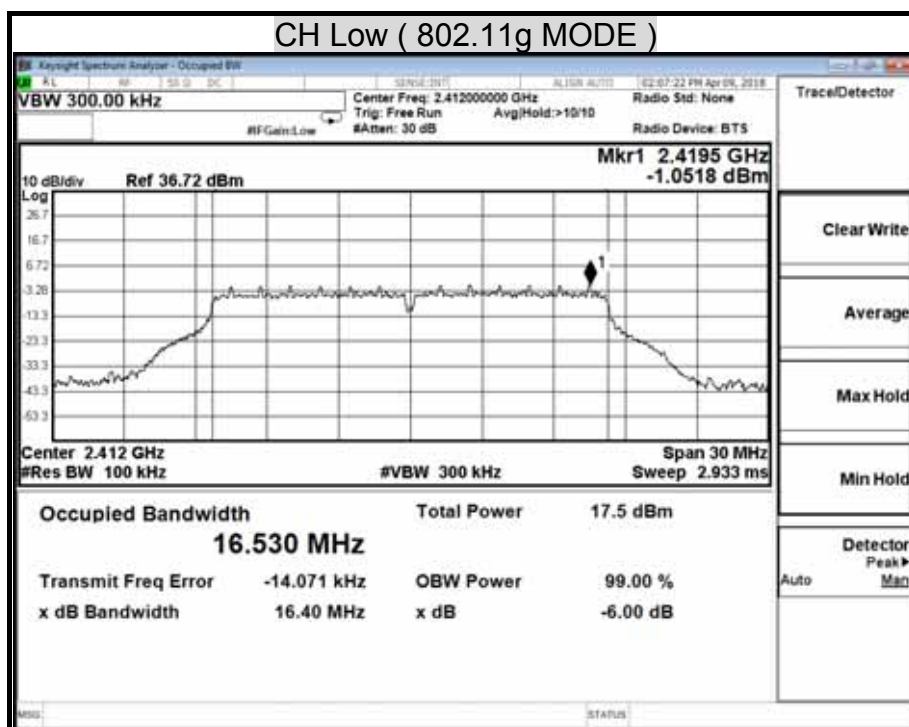


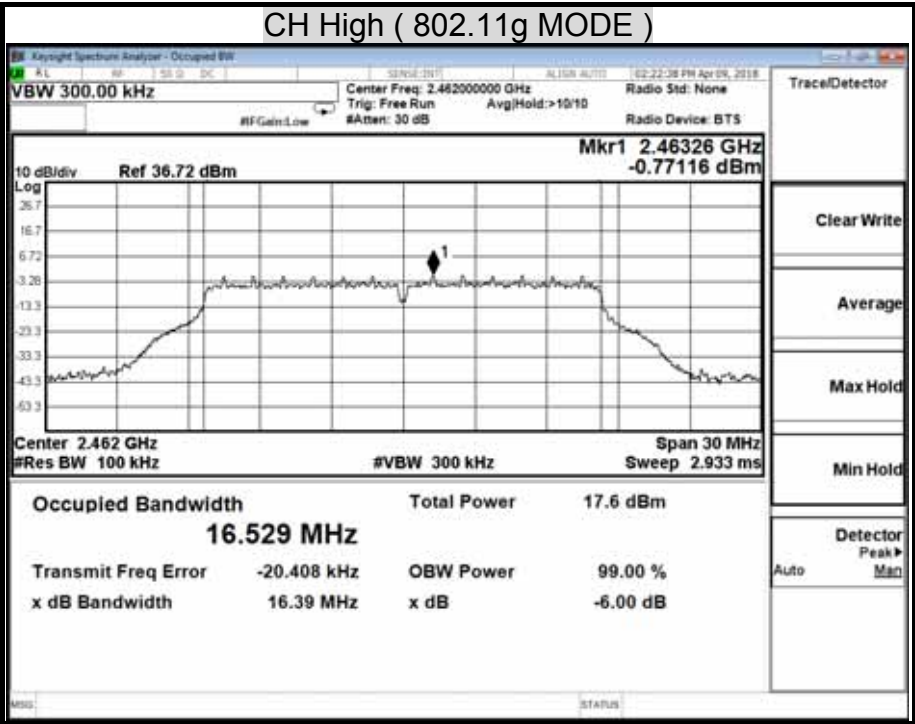


POWER SPECTRAL DENSITY (802.11n HT20 MODE)

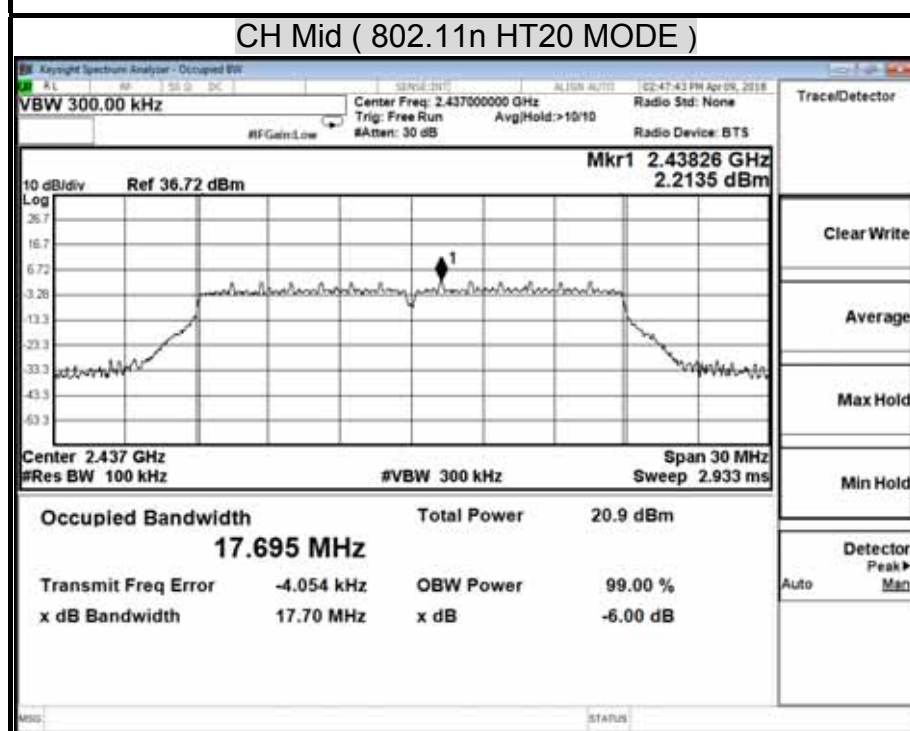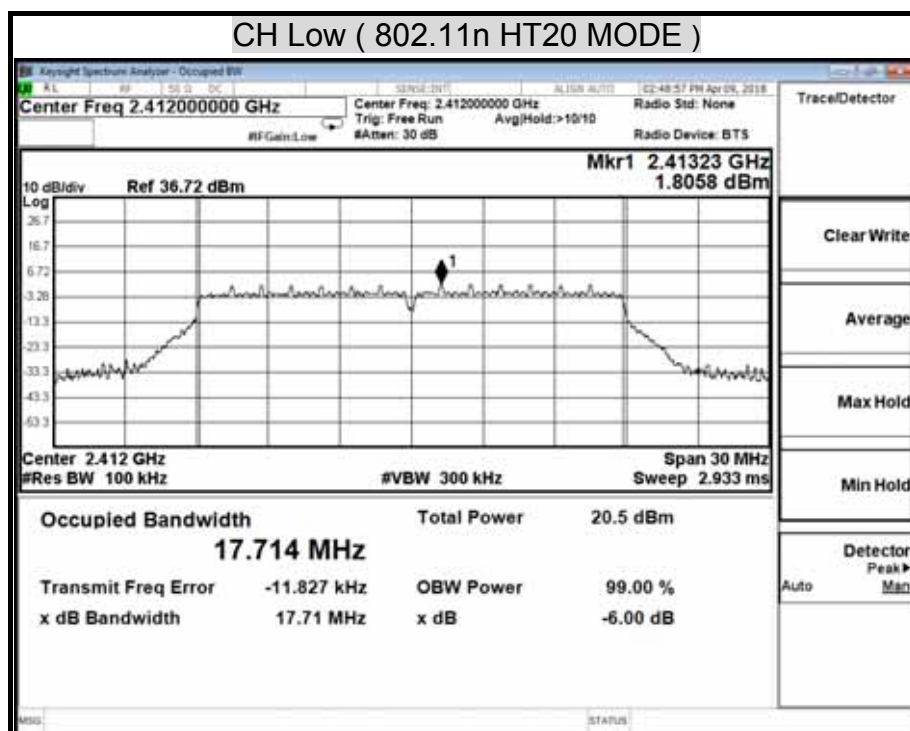

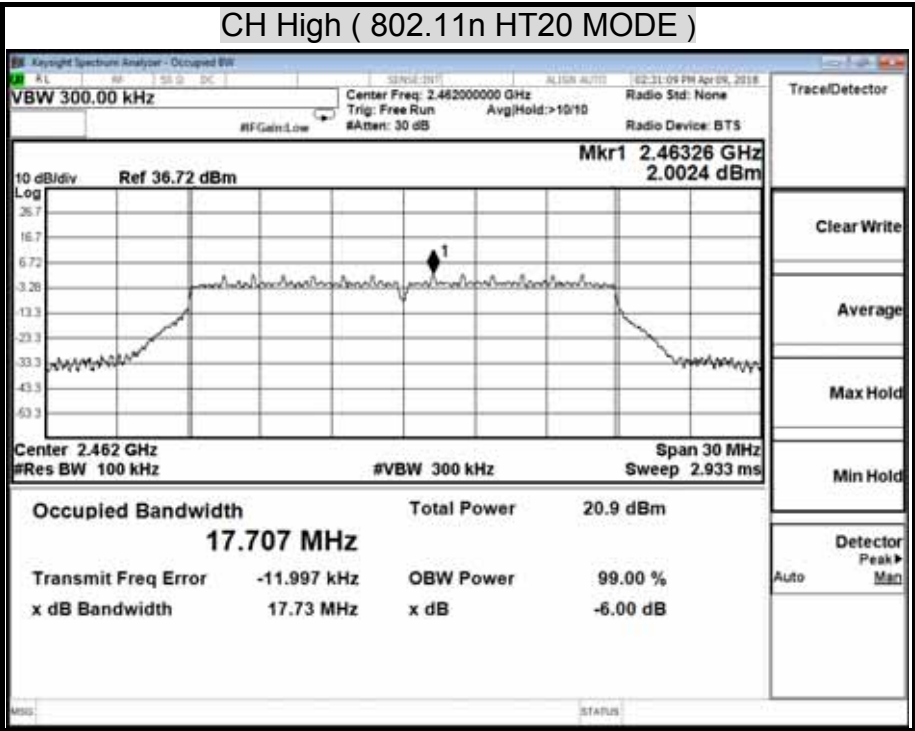


POWER SPECTRAL DENSITY (Bluetooth 4.0 (GFSK) MODE)

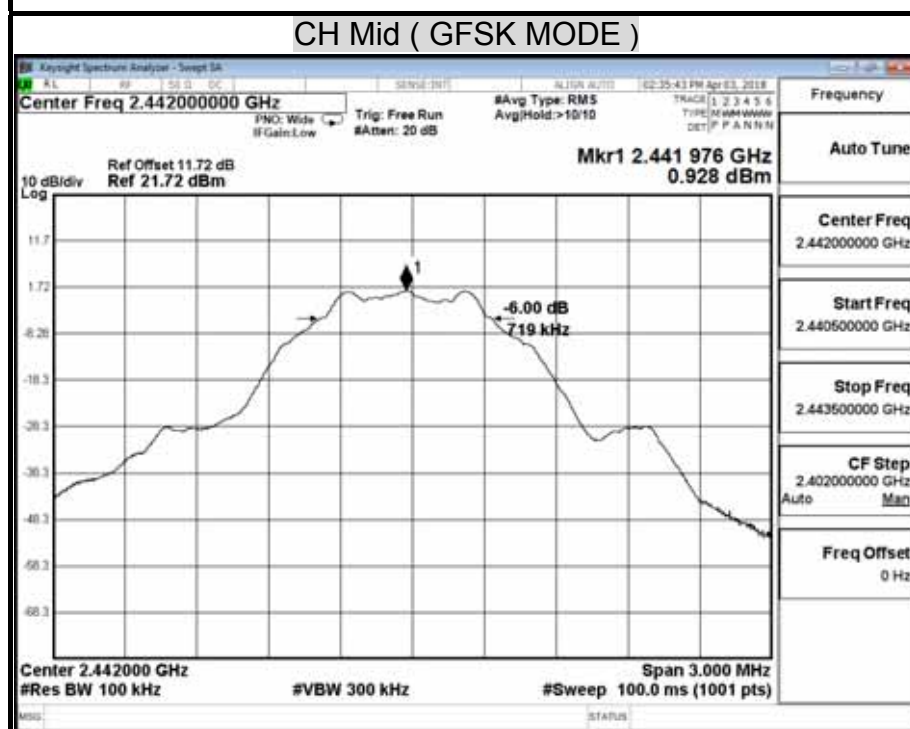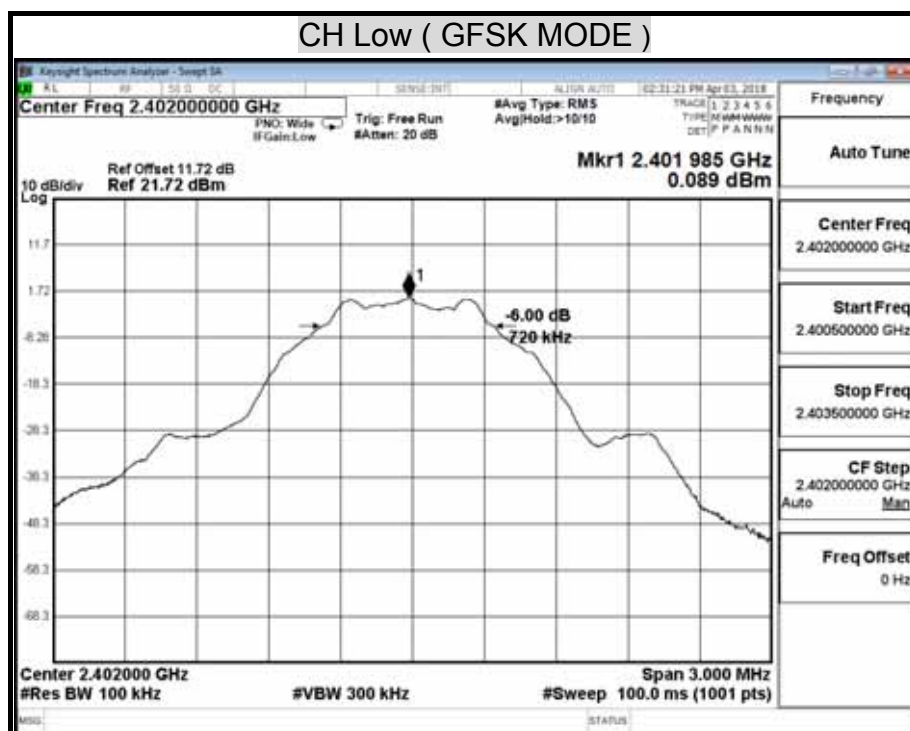



CH High (GFSK MODE)

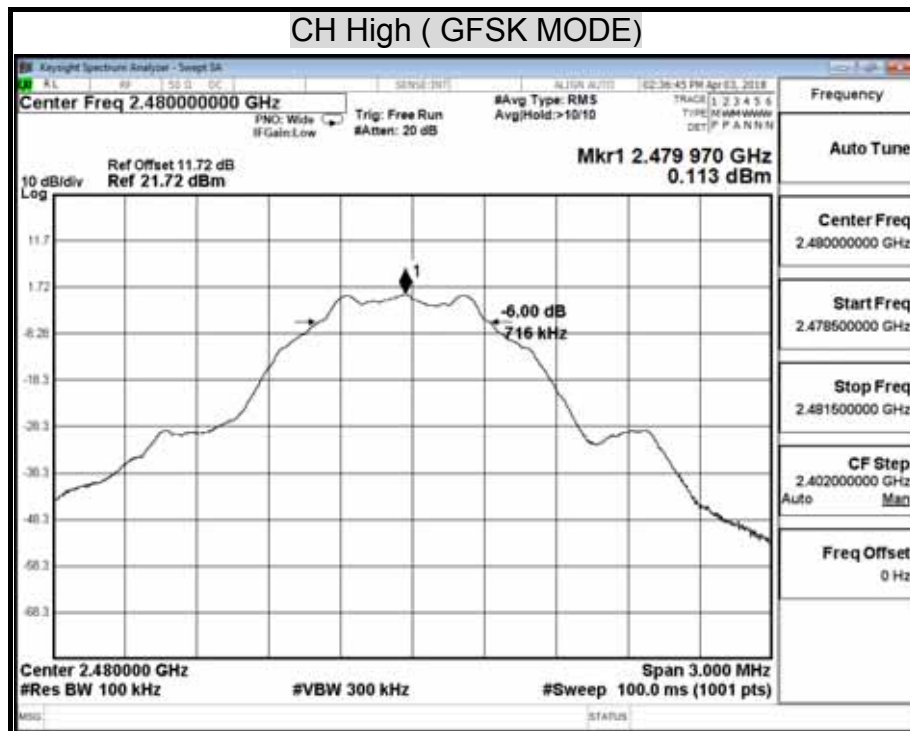

8.5 CONDUCTED SPURIOUS EMISSION

LIMITS


§ 15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

TEST EQUIPMENT

| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due |
|------------------------------|--------------|--------|---------------|-----------------|
| PSA Series Spectrum Analyzer | Agilent | E4446A | MY43360132 | 06/06/2019 |

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP

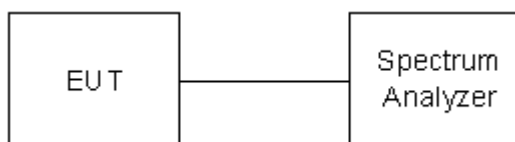

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


TEST RESULTS

OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT

| | | | |
|----------------------------|---------------|------------------|------------|
| Model Name | SC5000M PRIME | Test By | Ted Huang |
| Temp & Humidity | 26.2 , 43% | Test Date | 2018/04/03 |

(IEEE 802.11b MODE)

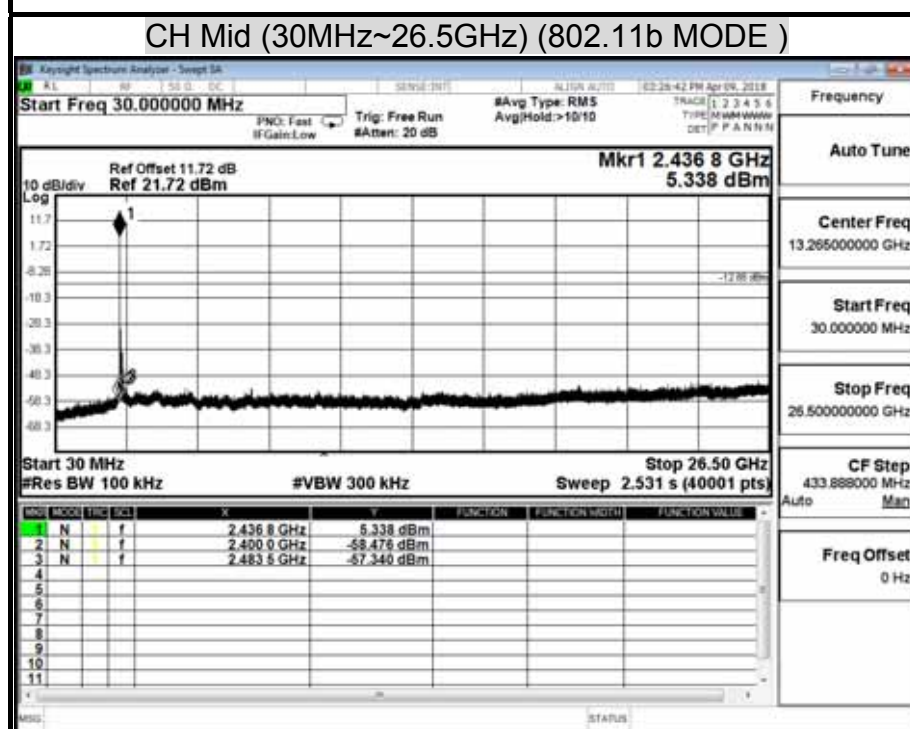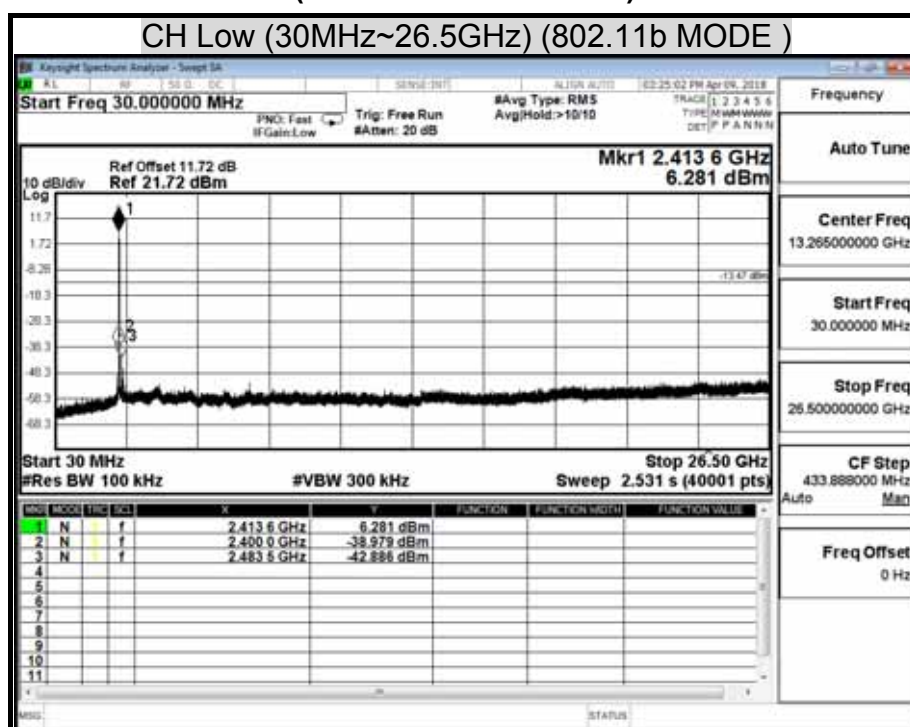


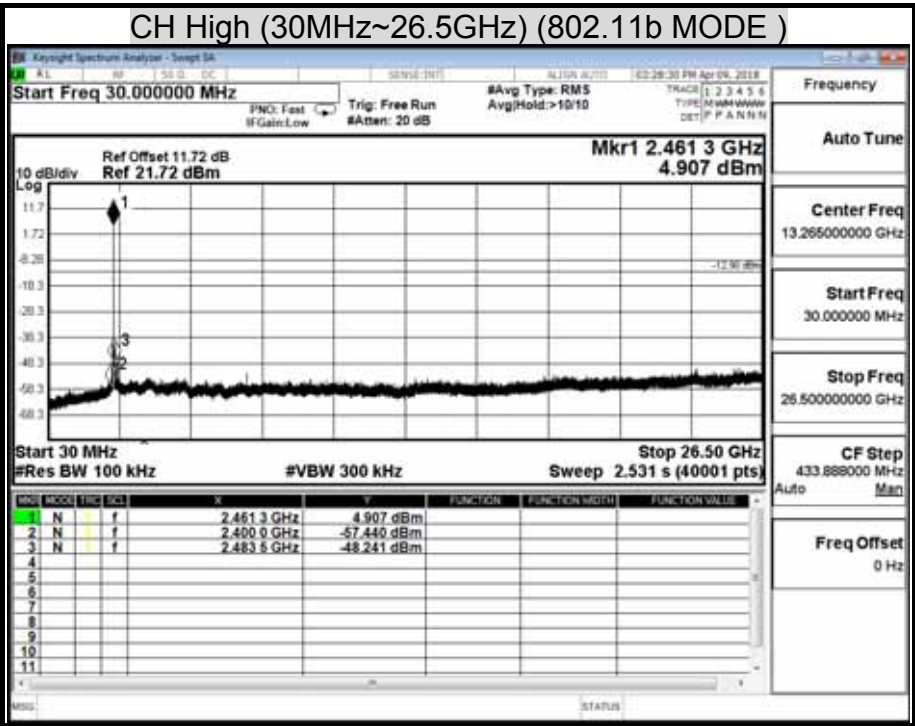


OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT


(802.11g MODE)

CH Low (30MHz~26.5GHz) (802.11g MODE)

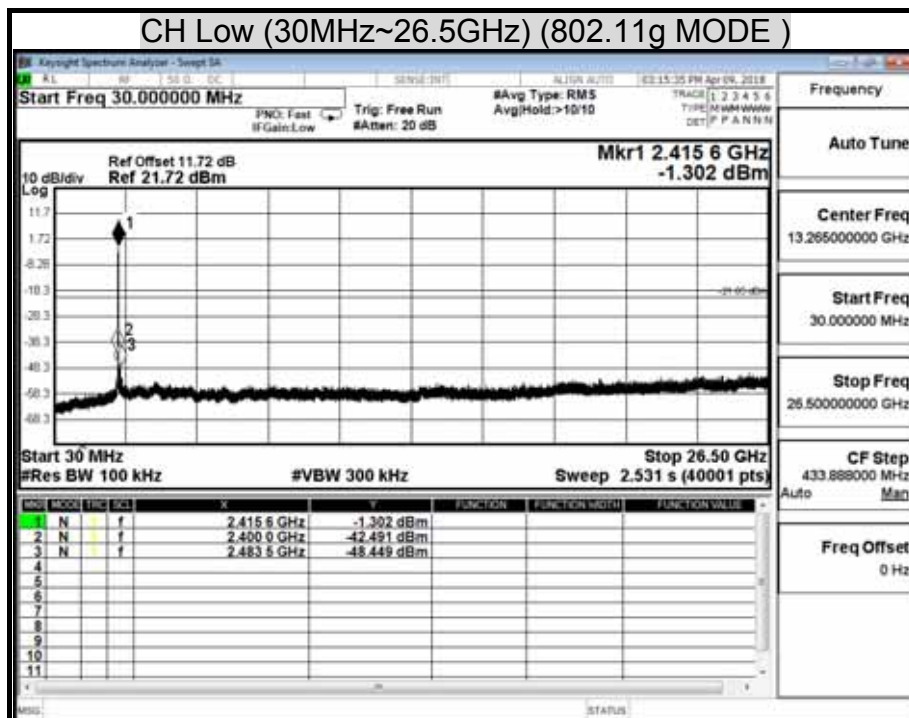

CH Mid (30MHz~26.5GHz) (802.11g MODE)

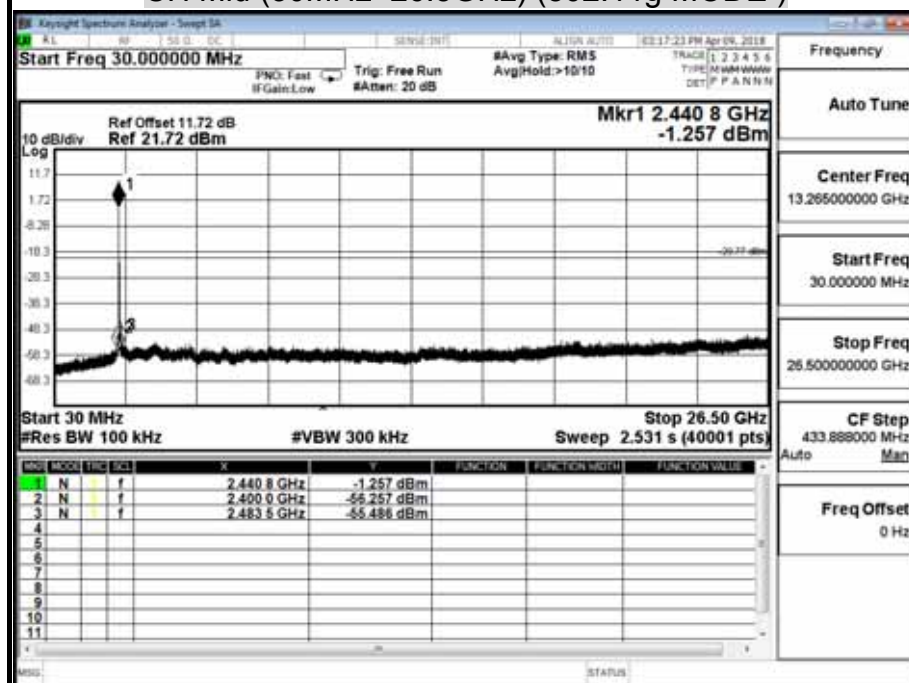


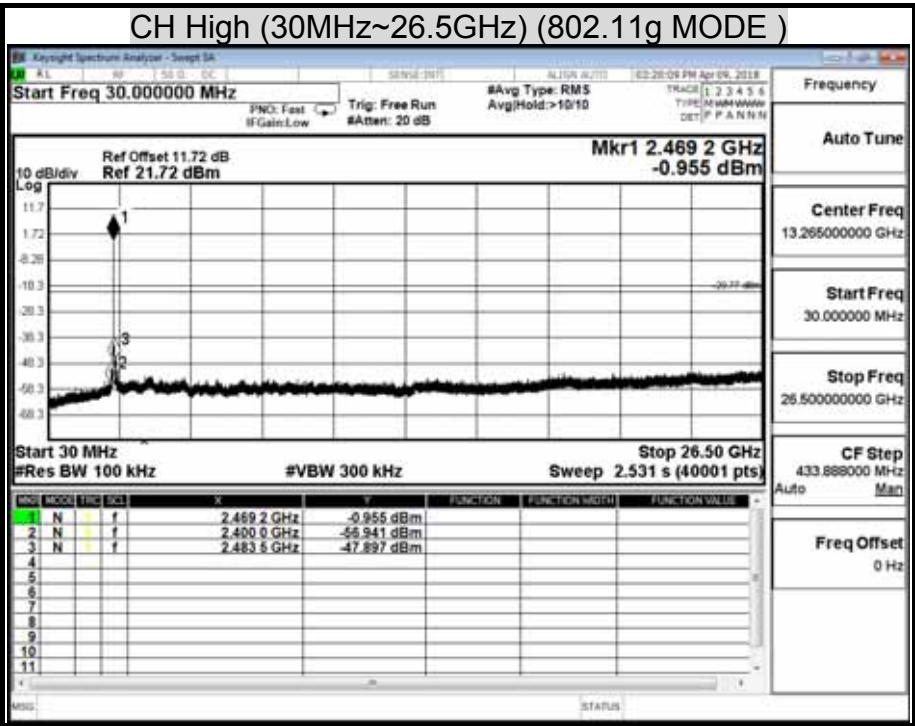


OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT


(802.11n HT20 MODE)

CH Low (30MHz~26.5GHz) (802.11n HT20 MODE)

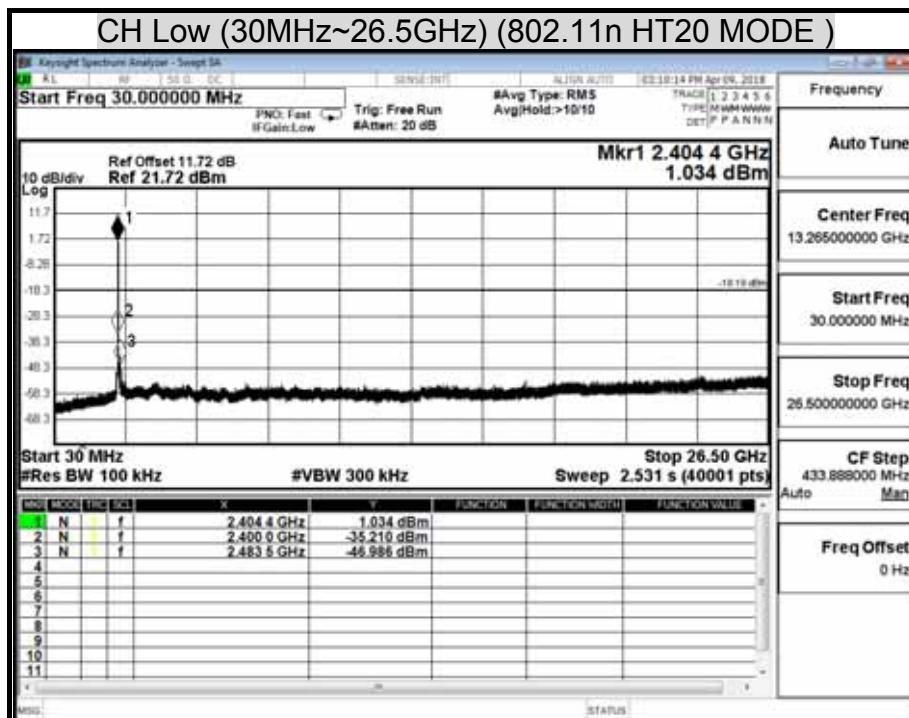

CH Mid (30MHz~26.5GHz) (802.11n HT20 MODE)

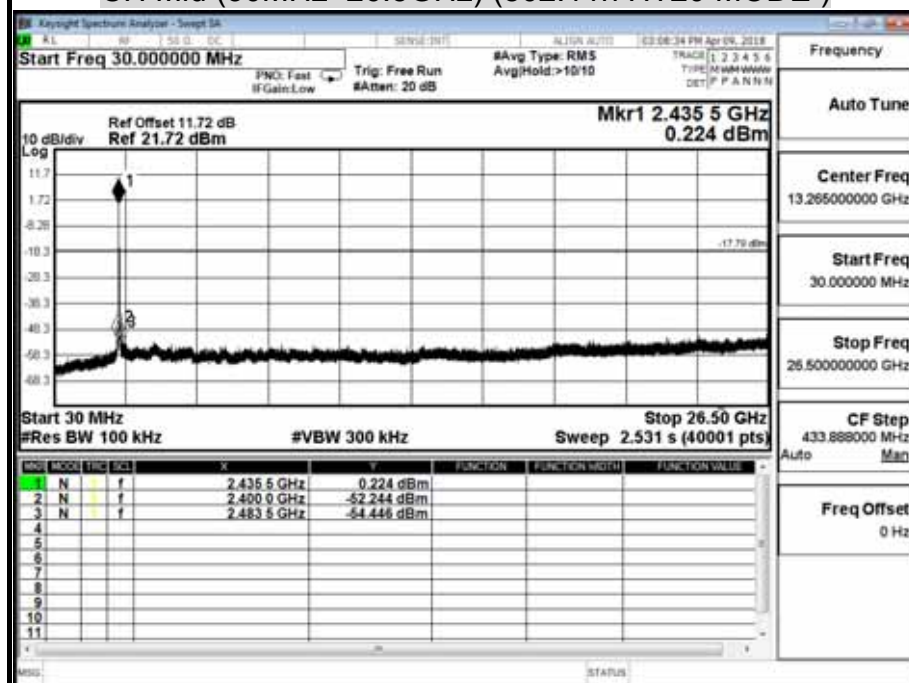

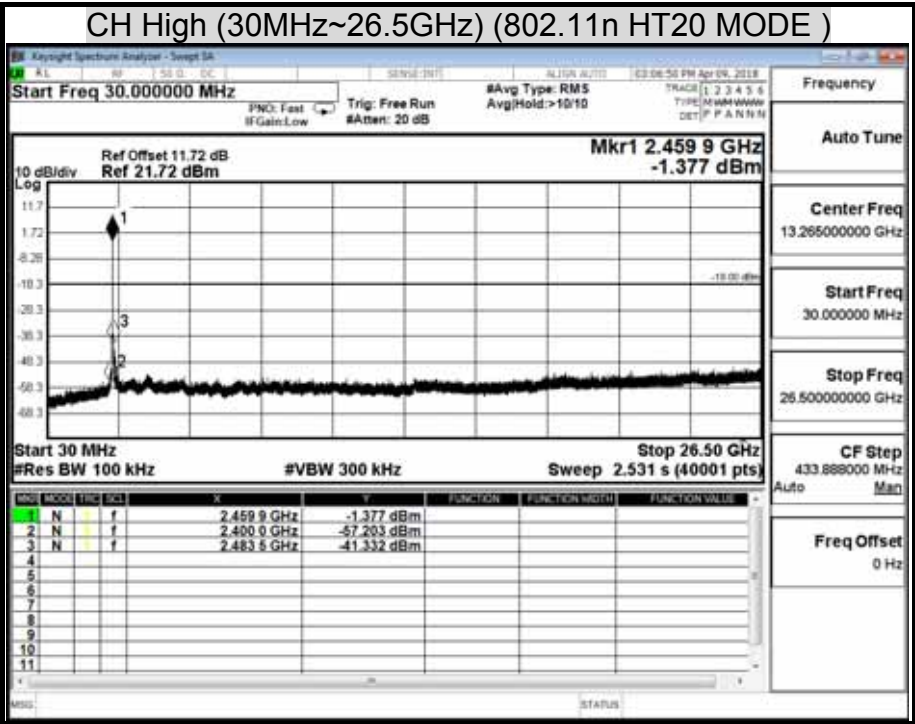


OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT


| | | | |
|-----------------|---------------|-----------|------------|
| Model Name | SC5000M PRIME | Test By | Ted Huang |
| Temp & Humidity | 26.2 , 43% | Test Date | 2018/04/03 |


(Bluetooth 4.0 (GFSK) MODE)

CH Low (30MHz~26.5GHz) (GFSK MODE)

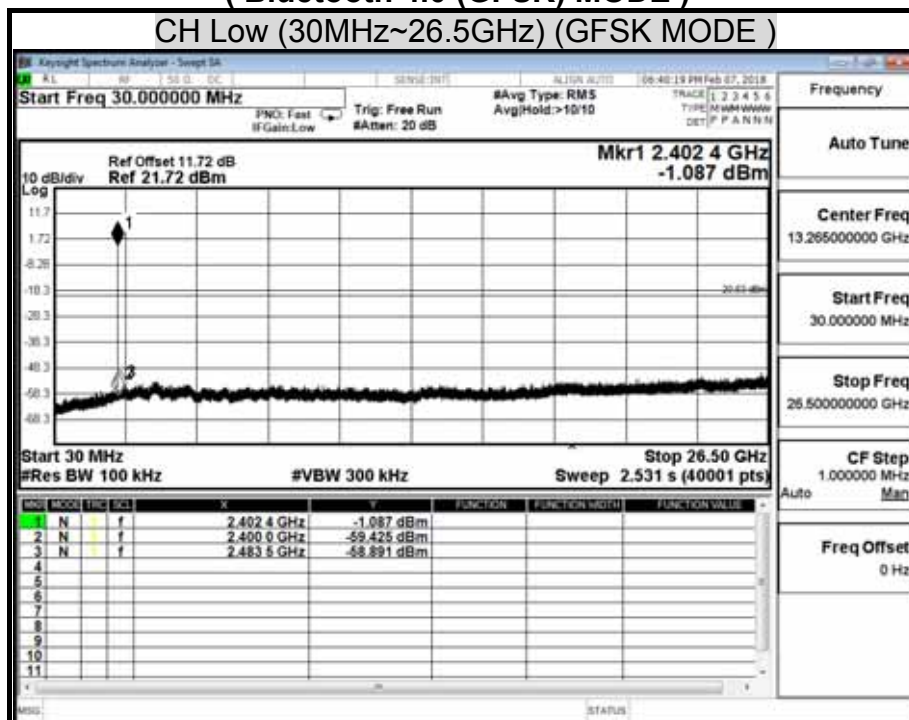


CH Low (30MHz~26.5GHz) (GFSK MODE)

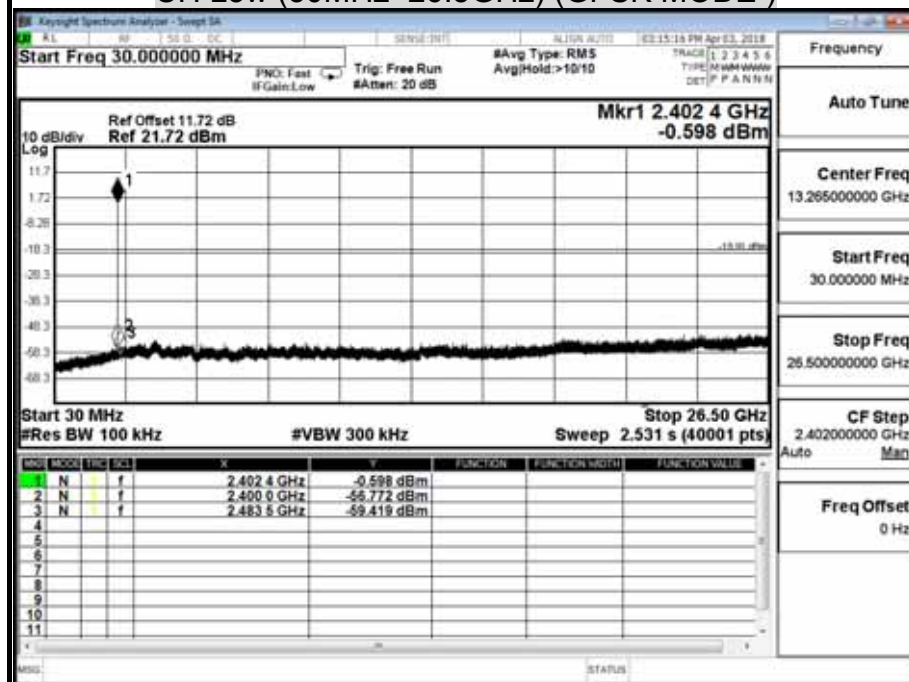

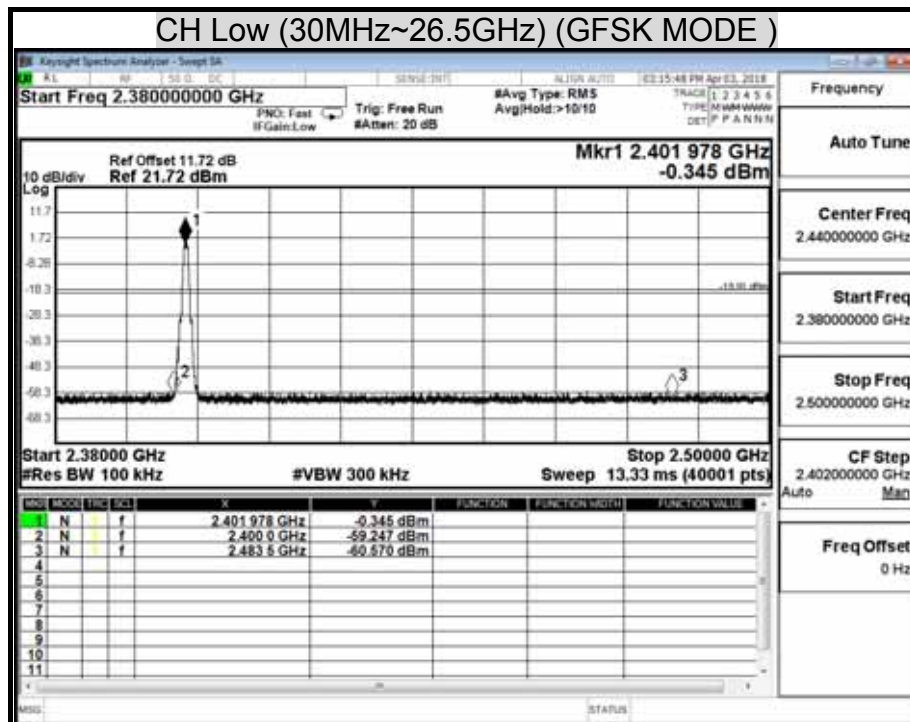



(Bluetooth 4.0 (GFSK) MODE)

CH Mid (30MHz~26.5GHz) (GFSK MODE)

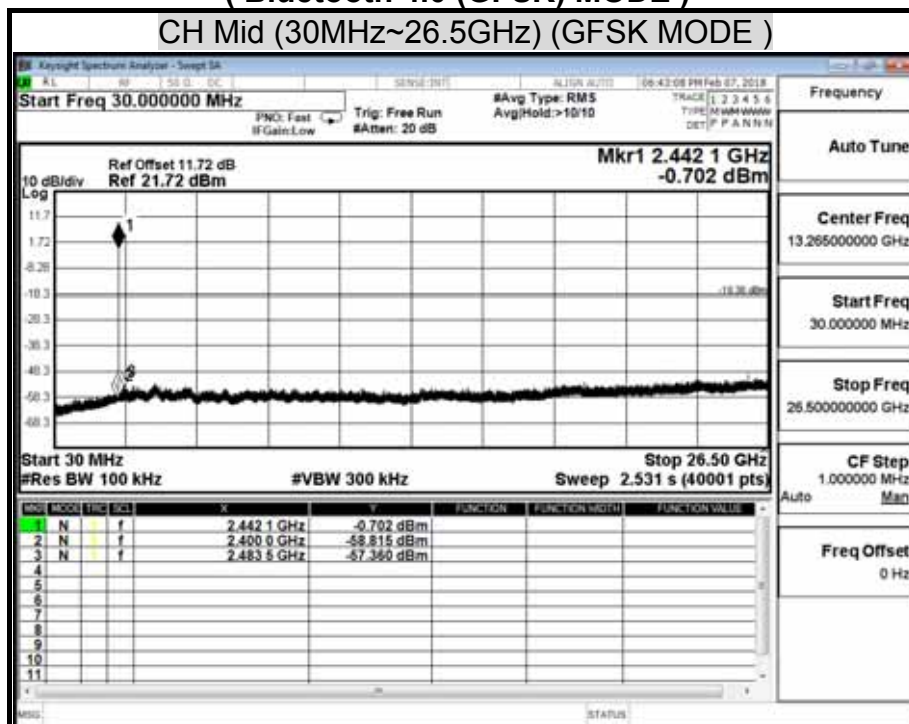


CH Mid (30MHz~26.5GHz) (GFSK MODE)

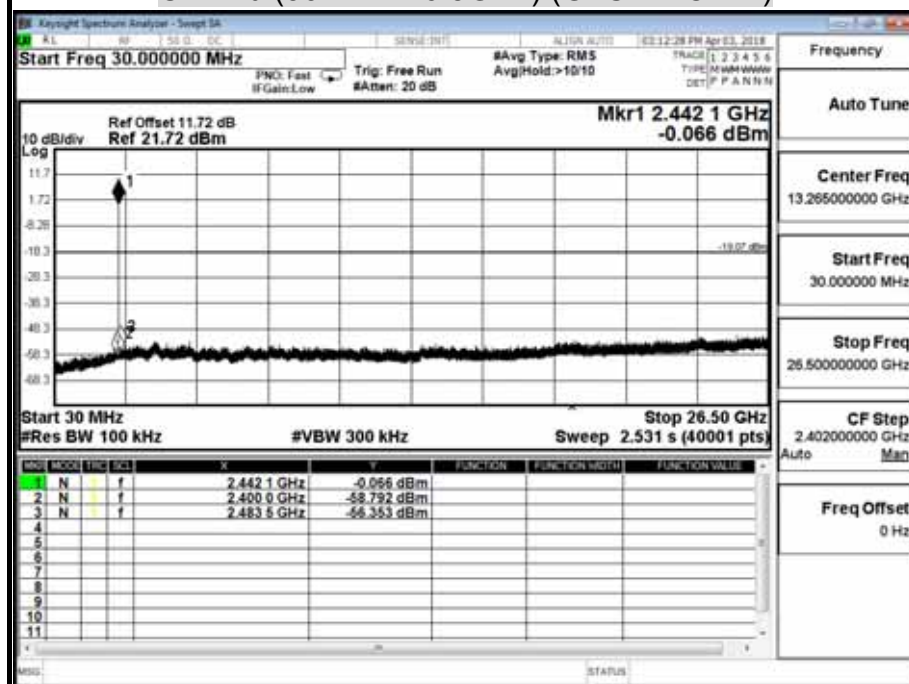

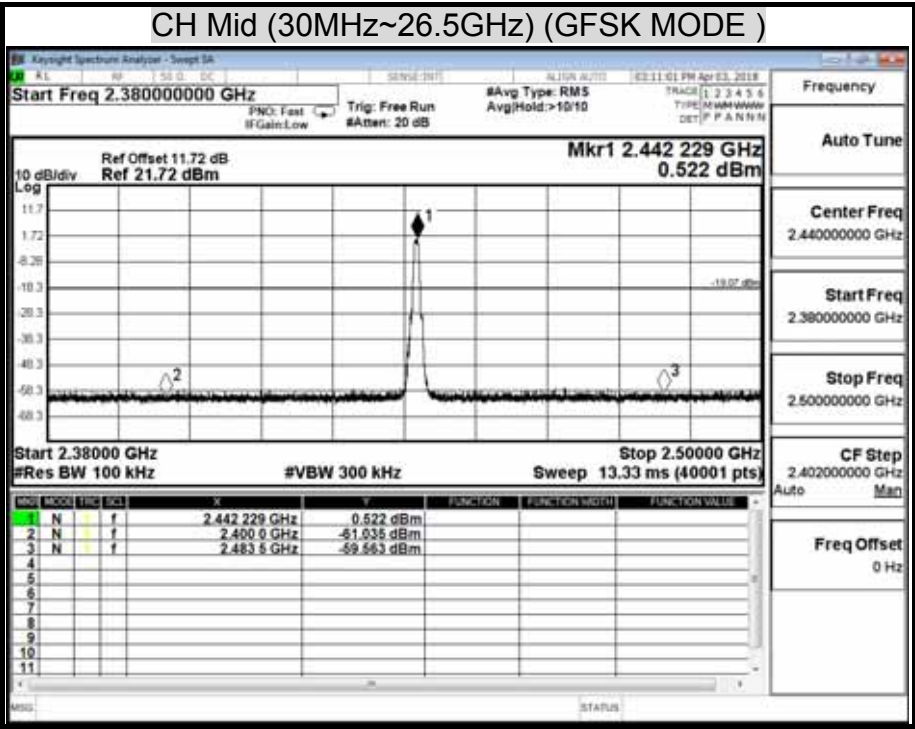



(Bluetooth 4.0 (GFSK) MODE)

CH High (30MHz~26.5GHz) (GFSK MODE)

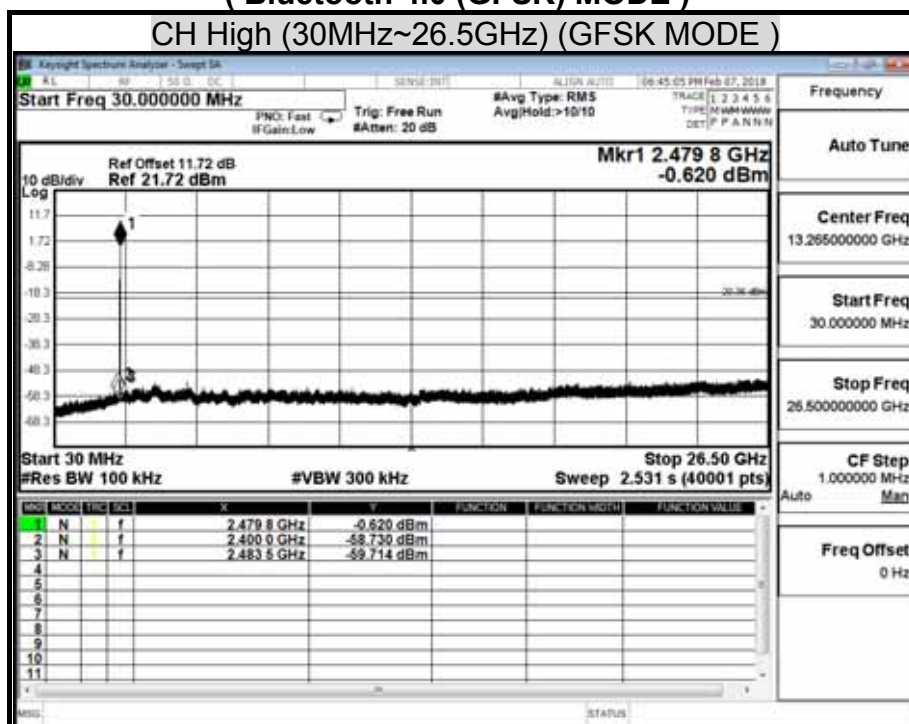

CH High (30MHz~26.5GHz) (GFSK MODE)

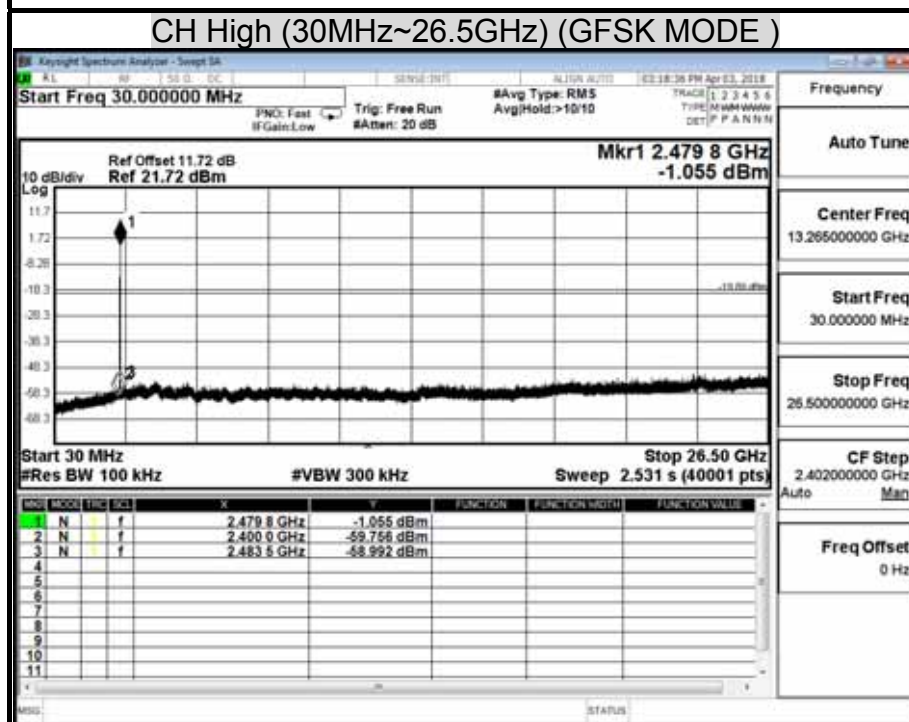

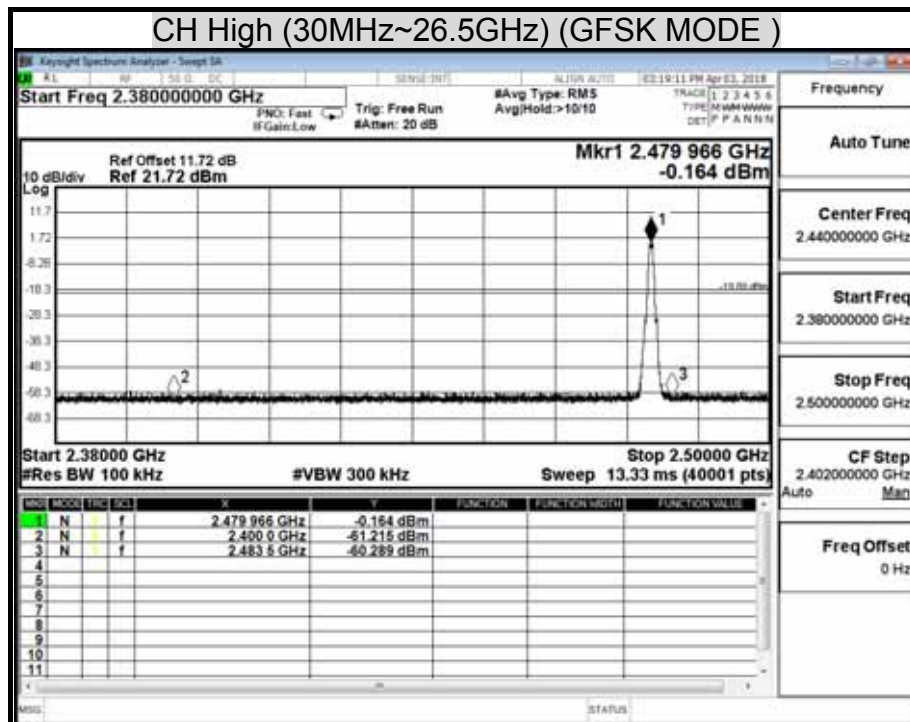

8.6 RADIATED EMISSIONS

8.6.1 TRANSMITTER RADIATED SUPURIOUS EMSSIONS

LIMITS

§ 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|----------------------------|-----------------------|-----------------|------------------|
| 0.090 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| ¹ 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.6 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 - 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - 156.52525 | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.7 - 156.9 | 2655 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 162.0125 - 167.17 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 167.72 - 173.2 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 240 - 285 | 3345.8 - 3338 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 322 - 335.4 | 3600 - 4400 | (²) |
| 13.36 - 13.41 | | | |

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§ 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§ 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|--------------------|--------------------------------------|----------------------------------|
| 30 - 88 | 100 ** | 3 |
| 88 - 216 | 150 ** | 3 |
| 216 - 960 | 200 ** | 3 |
| Above 960 | 500 | 3 |

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz, However, operation within these frequency bands is permitted under other sections of this Part, e-g, Sections 15.231 and 15.241.

§ 15.209 (b) In the emission table above, the tighter limit applies at the band edges.


TEST EQUIPMENTS

The following test equipments are utilized in making the measurements contained in this report.


| Chamber 966 | | | | |
|-------------------------------------|---------------------|--------------------|----------------------|------------------------|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due |
| Active Loop Antenna | ETS-LINDREN | 6502 | 8905-2356 | 07/19/2019 |
| Amplifier | HP | 8447F | 2443A01671 | 01/21/2019 |
| Bi-Log Antenna | Sunol | JB1 | A070506-2 | 02/08/2019 |
| Cable | Rosinol+Suhner | SUCOFLEX 104PEA | SN25737 /4PEA | 01/26/2019 |
| Double Ridged Guide Horn Antenna | ETS-LINDGREN | 3116 | 00078900 | 03/19/2019 |
| EMI Test Receiver | R&S | ESCI | 100782 | 06/11/2019 |
| Horn Antenna | Com-Power | AH-118 | 071032 | 04/18/2019 |
| Pre-Amplifier | EMCI | EMC012645 | 980098 | 01/21/2019 |
| PSA Series Spectrum Analyzer | Agilent | E4446A | MY43360132 | 06/06/2019 |

TEST SETUP

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 to 1GHz.

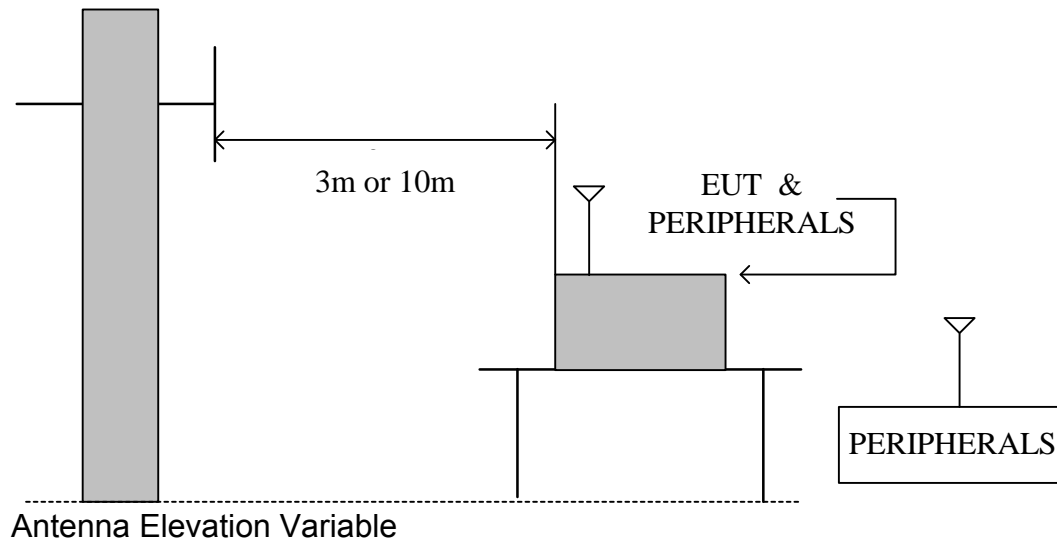

The diagram below shows the test setup that is utilized to make the measurements for emission above 1GHz.

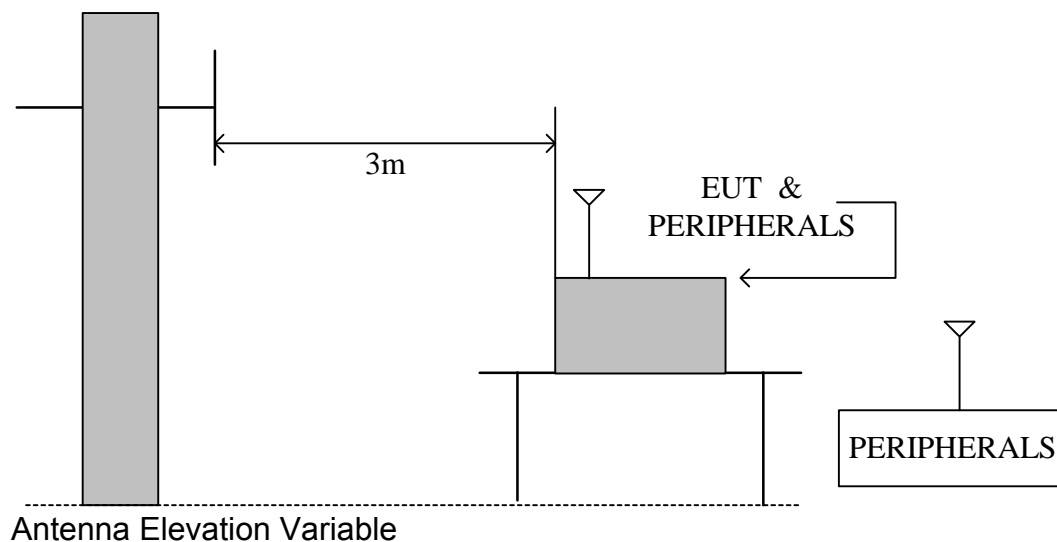

TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8/1.5 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. While measuring the radiated emission below 1GHz, the EUT was set 3/10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. While measuring the radiated emission above 1GHz, the EUT was set 3 meters away from the interference-receiving antenna
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. The tests were performed in accordance with 558074 D01 DTS Meas Guidance v03r03.

NOTE :

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
4. No emission is found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz)

TEST RESULTS


No non-compliance noted.

8.6.2 WORST-CASE RADIATED EMISSION BELOW 1 GHz

| | | | |
|---------------------|---|---------------------------|------------|
| Product Name | Pro Single Deck Media player w/platter | Test Date | 2018/05/03 |
| Model | SC5000M PRIME | Test By | Ted Huang |
| Test Mode | USB2 | TEMP& Humidity | 30.4 /34% |

Horizontal

(The chart below shows the highest readings taken from the final data.)

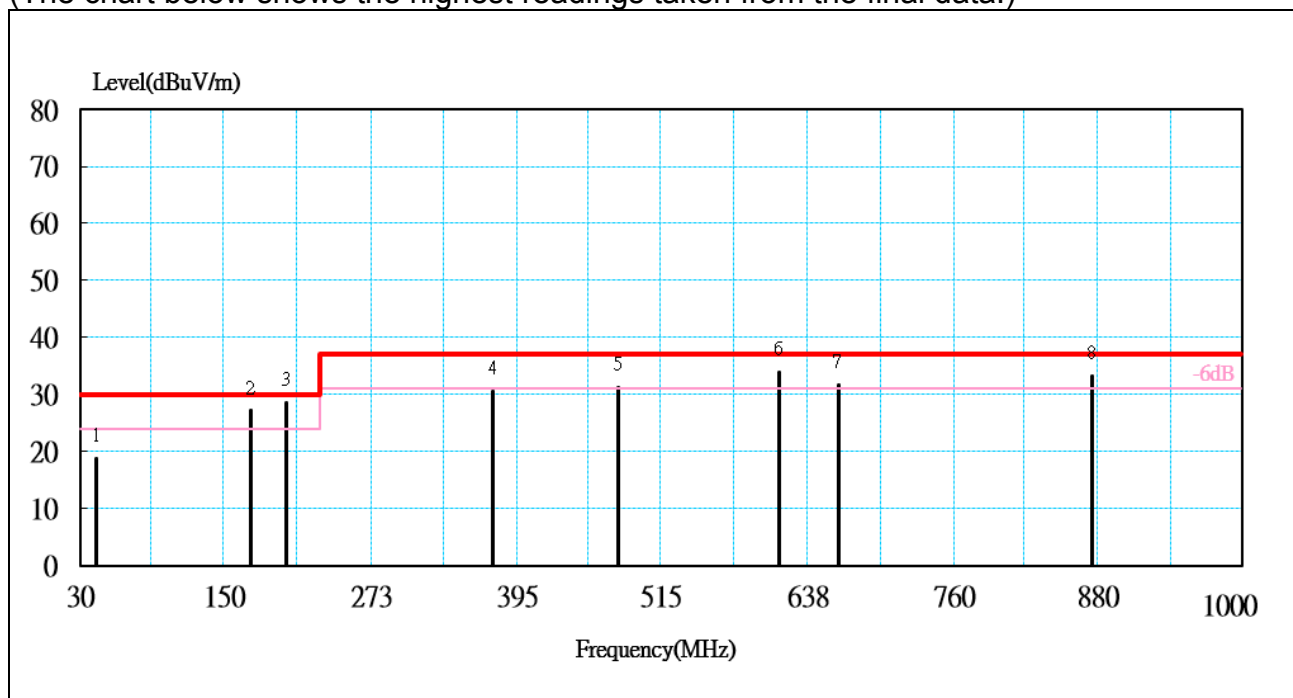


| No. | Freq- Uency (MHz) | Meter Reading at 3 m Level (dBμV) | Antenna Factor (dB/m) | Cable Loss (dB) | Emission at 3 m Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector Mode PK/QP |
|-----|-------------------------|---|-----------------------------|-----------------------|--------------------------------------|--------------------|----------------|---------------------------|
| 1 | 43.53 | 6.25 | 11.62 | 0.93 | 18.80 | 30.00 | -11.20 | QP |
| 2 | 172.02 | 13.54 | 11.60 | 2.06 | 27.19 | 30.00 | -2.81 | QP |
| 3 | 202.15 | 13.75 | 12.56 | 2.27 | 28.57 | 30.00 | -1.43 | QP |
| 4 | 375.00 | 12.08 | 14.85 | 3.71 | 30.64 | 37.00 | -6.36 | QP |
| 5 | 479.99 | 9.49 | 17.22 | 4.59 | 31.30 | 37.00 | -5.70 | QP |
| 6 | 614.38 | 9.93 | 18.83 | 5.20 | 33.96 | 37.00 | -3.04 | QP |
| 7 | 663.53 | 6.75 | 19.62 | 5.42 | 31.79 | 37.00 | -5.21 | QP |
| 8 | 875.02 | 5.42 | 21.70 | 6.22 | 33.34 | 37.00 | -3.66 | QP |

Note: 1. QP= Quasi-peak Reading.
2. The other emission levels were very low against the limit

| | | | |
|---------------------|--|---------------------------|------------|
| Product Name | Pro Single Deck Media player w/platter | Test Date | 2018/05/03 |
| Model | SC5000M PRIME | Test By | Ted Huang |
| Test Mode | USB2 | TEMP& Humidity | 30.4 /34% |

Vertical

(The chart below shows the highest readings taken from the final data.)

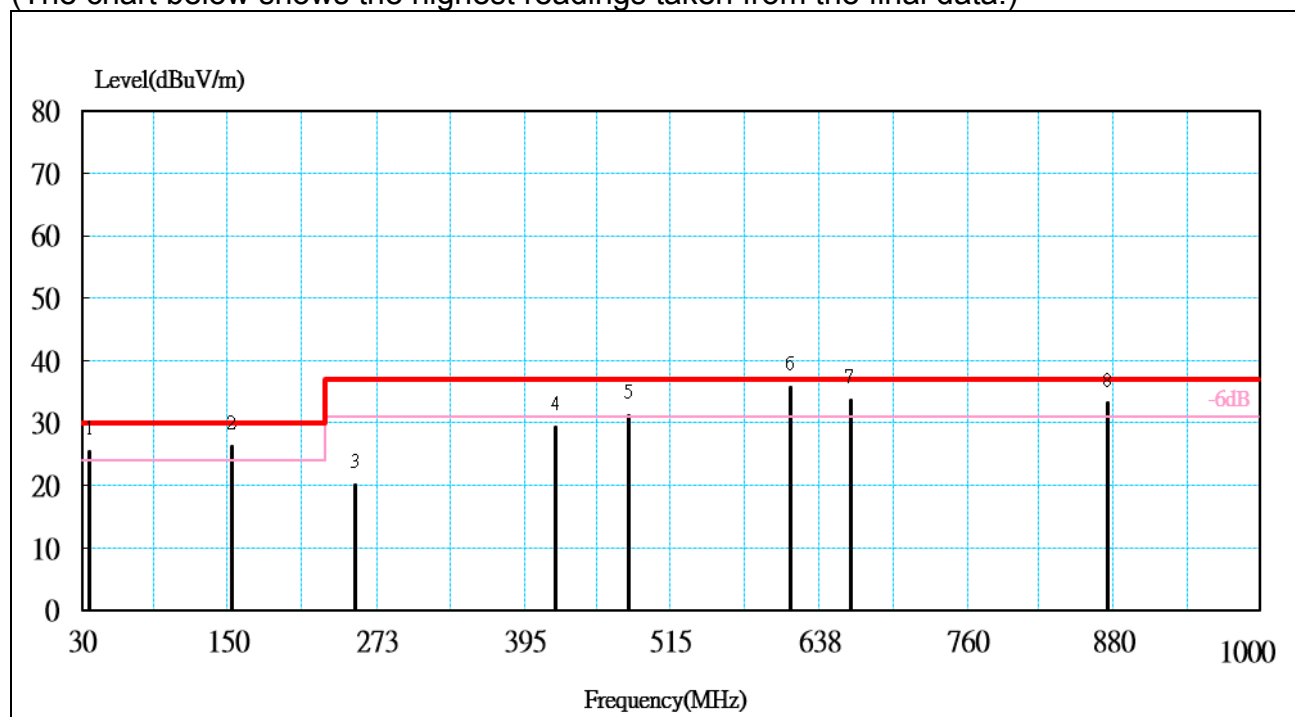

| No. | Freq- uency (MHz) | Meter Reading at 3 m Level (dBμV) | Antenna Factor (dB/m) | Cable Loss (dB) | Emission at 3 m Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector Mode PK/QP |
|-----|-------------------------|---|-----------------------------|-----------------------|--------------------------------------|--------------------|----------------|---------------------------|
| 1 | 36.58 | 8.42 | 16.23 | 0.85 | 25.51 | 30.00 | -4.49 | QP |
| 2 | 153.72 | 12.13 | 12.24 | 1.90 | 26.27 | 30.00 | -3.73 | QP |
| 3 | 255.80 | 5.58 | 11.82 | 2.70 | 20.10 | 37.00 | -16.90 | QP |
| 4 | 420.90 | 9.47 | 15.80 | 4.10 | 29.38 | 37.00 | -7.62 | QP |
| 5 | 480.00 | 9.42 | 17.22 | 4.59 | 31.23 | 37.00 | -5.77 | QP |
| 6 | 614.38 | 11.75 | 18.83 | 5.20 | 35.78 | 37.00 | -1.22 | QP |
| 7 | 663.53 | 8.68 | 19.62 | 5.42 | 33.72 | 37.00 | -3.28 | QP |
| 8 | 875.00 | 5.29 | 21.70 | 6.22 | 33.21 | 37.00 | -3.79 | QP |

Note: 1. QP= Quasi-peak Reading.
2. The other emission levels were very low against the limit

8.6.3 TRANSMITTER RADIATED EMISSION ABOVE 1 GHz

| | | | |
|---------------------|--|---------------------------|------------|
| Product Name | Pro Single Deck Media player w/platter | Test Date | 2018/04/03 |
| Model | SC5000M PRIME | Test By | Ted Huang |
| Test Mode | IEEE 802.11b TX (CH Low) | TEMP& Humidity | 26.2 , 43% |

| TX / IEEE 802.11b mode / CH Low | | | | | Measurement Distance at 3m | | | | Horizontal polarity | |
|---------------------------------|---------|--------|------------|---------|----------------------------|----------|----------|--------|---------------------|--|
| Freq. | Reading | AF | Cable Loss | Pre-amp | Filter | Level | Limit | Margin | Mark | |
| (MHz) | (dBμV) | (dB/m) | (dB) | (dB) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | (P/Q/A) | |
| * 1124.96 | 61.20 | 25.07 | 1.80 | 47.28 | 0.41 | 41.21 | 74.00 | -32.79 | P | |
| * 1124.96 | 55.59 | 25.07 | 1.80 | 47.28 | 0.41 | 35.60 | 54.00 | -18.40 | A | |
| * 1188.16 | 61.88 | 25.32 | 1.85 | 47.24 | 0.42 | 42.23 | 74.00 | -31.77 | P | |
| * 1188.16 | 55.76 | 25.32 | 1.85 | 47.24 | 0.42 | 36.12 | 54.00 | -17.88 | A | |
| 1659.54 | 59.59 | 27.84 | 2.22 | 46.95 | 0.63 | 43.33 | 74.00 | -30.67 | P | |
| 1659.54 | 52.97 | 27.84 | 2.22 | 46.95 | 0.63 | 36.71 | 54.00 | -17.29 | A | |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | P | |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | A | |

| TX / IEEE 802.11b mode / CH Low | | | | | Measurement Distance at 3m | | | | Vertical polarity | |
|---------------------------------|---------|--------|------------|---------|----------------------------|----------|----------|--------|-------------------|--|
| Freq. | Reading | AF | Cable Loss | Pre-amp | Filter | Level | Limit | Margin | Mark | |
| (MHz) | (dBμV) | (dB/m) | (dB) | (dB) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | (P/Q/A) | |
| * 1124.90 | 63.54 | 25.07 | 1.80 | 47.28 | 0.41 | 43.55 | 74.00 | -30.45 | P | |
| * 1124.90 | 57.62 | 25.07 | 1.80 | 47.28 | 0.41 | 37.63 | 54.00 | -16.37 | A | |
| * 1187.93 | 63.38 | 25.31 | 1.85 | 47.24 | 0.42 | 43.73 | 74.00 | -30.27 | P | |
| * 1187.93 | 58.57 | 25.31 | 1.85 | 47.24 | 0.42 | 38.92 | 54.00 | -15.08 | A | |
| 1659.55 | 60.14 | 27.84 | 2.22 | 46.95 | 0.63 | 43.88 | 74.00 | -30.12 | P | |
| 1659.55 | 54.72 | 27.84 | 2.22 | 46.95 | 0.63 | 38.46 | 54.00 | -15.54 | A | |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | P | |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | A | |

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter}, \text{Margin} = \text{Level} - \text{Limit}$$
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

| | | | |
|---------------------|--|---------------------------|------------|
| Product Name | Pro Single Deck Media player w/platter | Test Date | 2018/04/03 |
| Model | SC5000M PRIME | Test By | Ted Huang |
| Test Mode | IEEE 802.11b TX (CH Middle) | TEMP& Humidity | 26.2 , 43% |

| TX / IEEE 802.11b mode / CH Middle | | | | Measurement Distance at 3m | | | | Horizontal polarity | |
|------------------------------------|---------|--------|------------|----------------------------|--------|----------|----------|---------------------|---------|
| Freq. | Reading | AF | Cable Loss | Pre-amp | Filter | Level | Limit | Margin | Mark |
| (MHz) | (dBμV) | (dB/m) | (dB) | (dB) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | (P/Q/A) |
| * 1125.02 | 61.54 | 25.08 | 1.80 | 47.28 | 0.41 | 41.55 | 74.00 | -32.45 | P |
| * 1125.02 | 55.62 | 25.08 | 1.80 | 47.28 | 0.41 | 35.63 | 54.00 | -18.37 | A |
| * 1188.13 | 62.33 | 25.31 | 1.85 | 47.24 | 0.42 | 42.68 | 74.00 | -31.32 | P |
| * 1188.13 | 55.88 | 25.31 | 1.85 | 47.24 | 0.42 | 36.23 | 54.00 | -17.77 | A |
| 1659.58 | 59.64 | 27.84 | 2.22 | 46.95 | 0.63 | 43.38 | 74.00 | -30.62 | P |
| 1659.58 | 53.18 | 27.84 | 2.22 | 46.95 | 0.63 | 36.92 | 54.00 | -17.08 | A |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | P |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | A |

I

| TX / IEEE 802.11b mode / CH Middle | | | | Measurement Distance at 3m | | | | Vertical polarity | |
|------------------------------------|---------|--------|------------|----------------------------|--------|----------|----------|-------------------|---------|
| Freq. | Reading | AF | Cable Loss | Pre-amp | Filter | Level | Limit | Margin | Mark |
| (MHz) | (dBμV) | (dB/m) | (dB) | (dB) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | (P/Q/A) |
| * 1124.95 | 63.68 | 25.07 | 1.80 | 47.28 | 0.41 | 43.69 | 74.00 | -30.31 | P |
| * 1124.95 | 57.78 | 25.07 | 1.80 | 47.28 | 0.41 | 37.79 | 54.00 | -16.21 | A |
| * 1187.98 | 63.75 | 25.31 | 1.85 | 47.24 | 0.42 | 44.10 | 74.00 | -29.90 | P |
| * 1187.98 | 58.82 | 25.31 | 1.85 | 47.24 | 0.42 | 39.17 | 54.00 | -14.83 | A |
| 1659.64 | 60.42 | 27.84 | 2.22 | 46.95 | 0.63 | 44.16 | 74.00 | -29.84 | P |
| 1659.64 | 55.08 | 27.84 | 2.22 | 46.95 | 0.63 | 38.82 | 54.00 | -15.18 | A |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | P |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | A |

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter , Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

| | | | |
|---------------------|--|---------------------------|------------|
| Product Name | Pro Single Deck Media player w/platter | Test Date | 2018/04/03 |
| Model | SC5000M PRIME | Test By | Ted Huang |
| Test Mode | IEEE 802.11b TX (CH High) | TEMP& Humidity | 26.2 , 43% |

| TX / IEEE 802.11b mode / CH High | | | | Measurement Distance at 3m | | | | Horizontal polarity | |
|----------------------------------|---------|--------|------------|----------------------------|--------|----------|----------|---------------------|---------|
| Freq. | Reading | AF | Cable Loss | Pre-amp | Filter | Level | Limit | Margin | Mark |
| (MHz) | (dBμV) | (dB/m) | (dB) | (dB) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | (P/Q/A) |
| * 1125.07 | 61.55 | 25.08 | 1.80 | 47.28 | 0.41 | 41.56 | 74.00 | -32.44 | P |
| * 1125.07 | 55.72 | 25.08 | 1.80 | 47.28 | 0.41 | 35.73 | 54.00 | -18.27 | A |
| * 1188.05 | 62.15 | 25.31 | 1.85 | 47.24 | 0.42 | 42.50 | 74.00 | -31.50 | P |
| * 1188.05 | 55.88 | 25.31 | 1.85 | 47.24 | 0.42 | 36.23 | 54.00 | -17.77 | A |
| 1659.47 | 59.69 | 27.84 | 2.22 | 46.95 | 0.63 | 43.43 | 74.00 | -30.57 | P |
| 1659.47 | 53.14 | 27.84 | 2.22 | 46.95 | 0.63 | 36.88 | 54.00 | -17.12 | A |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | P |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | A |

| TX / IEEE 802.11b mode / CH High | | | | Measurement Distance at 3m | | | | Vertical polarity | |
|----------------------------------|---------|--------|------------|----------------------------|--------|----------|----------|-------------------|---------|
| Freq. | Reading | AF | Cable Loss | Pre-amp | Filter | Level | Limit | Margin | Mark |
| (MHz) | (dBμV) | (dB/m) | (dB) | (dB) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | (P/Q/A) |
| * 1124.86 | 63.63 | 25.07 | 1.80 | 47.28 | 0.41 | 43.64 | 74.00 | -30.36 | P |
| * 1124.86 | 57.82 | 25.07 | 1.80 | 47.28 | 0.41 | 37.83 | 54.00 | -16.17 | A |
| * 1188.05 | 63.48 | 25.31 | 1.85 | 47.24 | 0.42 | 43.83 | 74.00 | -30.17 | P |
| * 1188.05 | 58.72 | 25.31 | 1.85 | 47.24 | 0.42 | 39.07 | 54.00 | -14.93 | A |
| 1659.63 | 60.56 | 27.84 | 2.22 | 46.95 | 0.63 | 44.30 | 74.00 | -29.70 | P |
| 1659.63 | 54.93 | 27.84 | 2.22 | 46.95 | 0.63 | 38.67 | 54.00 | -15.33 | A |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | P |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | A |

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter , Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

| | | | |
|---------------------|--|---------------------------|------------|
| Product Name | Pro Single Deck Media player w/platter | Test Date | 2018/04/03 |
| Model | SC5000M PRIME | Test By | Ted Huang |
| Test Mode | IEEE 802.11g TX (CH Low) | TEMP& Humidity | 26.2 , 43% |

| TX / IEEE 802.11g mode / CH Low | | | | Measurement Distance at 3m | | | | Horizontal polarity | |
|---------------------------------|---------|--------|------------|----------------------------|--------|----------|----------|---------------------|---------|
| Freq. | Reading | AF | Cable Loss | Pre-amp | Filter | Level | Limit | Margin | Mark |
| (MHz) | (dBμV) | (dB/m) | (dB) | (dB) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | (P/Q/A) |
| * 1125.02 | 61.62 | 25.08 | 1.80 | 47.28 | 0.41 | 41.63 | 74.00 | -32.37 | P |
| * 1125.02 | 55.77 | 25.08 | 1.80 | 47.28 | 0.41 | 35.78 | 54.00 | -18.22 | A |
| * 1188.08 | 62.52 | 25.31 | 1.85 | 47.24 | 0.42 | 42.87 | 74.00 | -31.13 | P |
| * 1188.08 | 56.23 | 25.31 | 1.85 | 47.24 | 0.42 | 36.58 | 54.00 | -17.42 | A |
| 1659.62 | 59.64 | 27.84 | 2.22 | 46.95 | 0.63 | 43.38 | 74.00 | -30.62 | P |
| 1659.62 | 53.48 | 27.84 | 2.22 | 46.95 | 0.63 | 37.22 | 54.00 | -16.78 | A |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | P |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | A |

| TX / IEEE 802.11g mode / CH Low | | | | Measurement Distance at 3m | | | | Vertical polarity | |
|---------------------------------|---------|--------|------------|----------------------------|--------|----------|----------|-------------------|---------|
| Freq. | Reading | AF | Cable Loss | Pre-amp | Filter | Level | Limit | Margin | Mark |
| (MHz) | (dBμV) | (dB/m) | (dB) | (dB) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | (P/Q/A) |
| * 1124.95 | 63.68 | 25.07 | 1.80 | 47.28 | 0.41 | 43.69 | 74.00 | -30.31 | P |
| * 1124.95 | 57.78 | 25.07 | 1.80 | 47.28 | 0.41 | 37.79 | 54.00 | -16.21 | A |
| * 1188.05 | 63.82 | 25.31 | 1.85 | 47.24 | 0.42 | 44.17 | 74.00 | -29.83 | P |
| * 1188.05 | 58.86 | 25.31 | 1.85 | 47.24 | 0.42 | 39.21 | 54.00 | -14.79 | A |
| 1659.53 | 60.72 | 27.84 | 2.22 | 46.95 | 0.63 | 44.46 | 74.00 | -29.54 | P |
| 1659.53 | 55.12 | 27.84 | 2.22 | 46.95 | 0.63 | 38.86 | 54.00 | -15.14 | A |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | P |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | A |

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter , Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

| | | | |
|---------------------|--|---------------------------|------------|
| Product Name | Pro Single Deck Media player w/platter | Test Date | 2018/04/03 |
| Model | SC5000M PRIME | Test By | Ted Huang |
| Test Mode | IEEE 802.11g TX (CH Middle) | TEMP& Humidity | 26.2 , 43% |

| TX / IEEE 802.11g mode / CH Middle | | | | Measurement Distance at 3m | | | | Horizontal polarity | |
|------------------------------------|---------|--------|------------|----------------------------|--------|----------|----------|---------------------|---------|
| Freq. | Reading | AF | Cable Loss | Pre-amp | Filter | Level | Limit | Margin | Mark |
| (MHz) | (dBμV) | (dB/m) | (dB) | (dB) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | (P/Q/A) |
| * 1125.04 | 61.68 | 25.08 | 1.80 | 47.28 | 0.41 | 41.69 | 74.00 | -32.31 | P |
| * 1125.04 | 55.85 | 25.08 | 1.80 | 47.28 | 0.41 | 35.86 | 54.00 | -18.14 | A |
| * 1188.12 | 62.35 | 25.31 | 1.85 | 47.24 | 0.42 | 42.70 | 74.00 | -31.30 | P |
| * 1188.12 | 56.14 | 25.31 | 1.85 | 47.24 | 0.42 | 36.49 | 54.00 | -17.51 | A |
| 1659.56 | 59.68 | 27.84 | 2.22 | 46.95 | 0.63 | 43.42 | 74.00 | -30.58 | P |
| 1659.56 | 53.26 | 27.84 | 2.22 | 46.95 | 0.63 | 37.00 | 54.00 | -17.00 | A |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | P |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | A |

| TX / IEEE 802.11g mode / CH Middle | | | | Measurement Distance at 3m | | | | Vertical polarity | |
|------------------------------------|---------|--------|------------|----------------------------|--------|----------|----------|-------------------|---------|
| Freq. | Reading | AF | Cable Loss | Pre-amp | Filter | Level | Limit | Margin | Mark |
| (MHz) | (dBμV) | (dB/m) | (dB) | (dB) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | (P/Q/A) |
| * 1124.88 | 63.82 | 25.07 | 1.80 | 47.28 | 0.41 | 43.83 | 74.00 | -30.17 | P |
| * 1124.88 | 57.96 | 25.07 | 1.80 | 47.28 | 0.41 | 37.97 | 54.00 | -16.03 | A |
| * 1188.08 | 63.55 | 25.31 | 1.85 | 47.24 | 0.42 | 43.90 | 74.00 | -30.10 | P |
| * 1188.08 | 58.78 | 25.31 | 1.85 | 47.24 | 0.42 | 39.13 | 54.00 | -14.87 | A |
| 1659.60 | 60.76 | 27.84 | 2.22 | 46.95 | 0.63 | 44.50 | 74.00 | -29.50 | P |
| 1659.60 | 55.23 | 27.84 | 2.22 | 46.95 | 0.63 | 38.97 | 54.00 | -15.03 | A |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | P |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | A |

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter , Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

| | | | |
|---------------------|--|---------------------------|------------|
| Product Name | Pro Single Deck Media player w/platter | Test Date | 2018/04/03 |
| Model | SC5000M PRIME | Test By | Ted Huang |
| Test Mode | IEEE 802.11g TX (CH High) | TEMP& Humidity | 26.2 , 43% |

| TX / IEEE 802.11g mode / CH High | | | | Measurement Distance at 3m | | | | Horizontal polarity | |
|----------------------------------|---------|--------|------------|----------------------------|--------|----------|----------|---------------------|---------|
| Freq. | Reading | AF | Cable Loss | Pre-amp | Filter | Level | Limit | Margin | Mark |
| (MHz) | (dBμV) | (dB/m) | (dB) | (dB) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | (P/Q/A) |
| * 1124.95 | 61.28 | 25.07 | 1.80 | 47.28 | 0.41 | 41.29 | 74.00 | -32.71 | P |
| * 1124.95 | 55.67 | 25.07 | 1.80 | 47.28 | 0.41 | 35.68 | 54.00 | -18.32 | A |
| * 1188.13 | 61.68 | 25.31 | 1.85 | 47.24 | 0.42 | 42.03 | 74.00 | -31.97 | P |
| * 1188.13 | 55.52 | 25.31 | 1.85 | 47.24 | 0.42 | 35.87 | 54.00 | -18.13 | A |
| 1659.50 | 59.76 | 27.84 | 2.22 | 46.95 | 0.63 | 43.50 | 74.00 | -30.50 | P |
| 1659.50 | 53.18 | 27.84 | 2.22 | 46.95 | 0.63 | 36.92 | 54.00 | -17.08 | A |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | P |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | A |

| TX / IEEE 802.11g mode / CH High | | | | Measurement Distance at 3m | | | | Vertical polarity | |
|----------------------------------|---------|--------|------------|----------------------------|--------|----------|----------|-------------------|---------|
| Freq. | Reading | AF | Cable Loss | Pre-amp | Filter | Level | Limit | Margin | Mark |
| (MHz) | (dBμV) | (dB/m) | (dB) | (dB) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | (P/Q/A) |
| * 1124.93 | 63.64 | 25.07 | 1.80 | 47.28 | 0.41 | 43.65 | 74.00 | -30.35 | P |
| * 1124.93 | 57.85 | 25.07 | 1.80 | 47.28 | 0.41 | 37.86 | 54.00 | -16.14 | A |
| * 1187.98 | 63.46 | 25.31 | 1.85 | 47.24 | 0.42 | 43.81 | 74.00 | -30.19 | P |
| * 1187.98 | 58.63 | 25.31 | 1.85 | 47.24 | 0.42 | 38.98 | 54.00 | -15.02 | A |
| 1659.57 | 60.11 | 27.84 | 2.22 | 46.95 | 0.63 | 43.85 | 74.00 | -30.15 | P |
| 1659.57 | 54.65 | 27.84 | 2.22 | 46.95 | 0.63 | 38.39 | 54.00 | -15.61 | A |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | P |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | A |

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter , Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

| | | | |
|---------------------|--|---------------------------|------------|
| Product Name | Pro Single Deck Media player w/platter | Test Date | 2018/04/03 |
| Model | SC5000M PRIME | Test By | Ted Huang |
| Test Mode | IEEE 802.11n HT20 TX (CH Low) | TEMP& Humidity | 26.2 , 43% |

| TX / IEEE 802.11n HT20 mode / CH Low | | | | | Measurement Distance at 3m | | | Horizontal polarity | |
|--------------------------------------|---------|--------|------------|---------|----------------------------|----------|----------|---------------------|---------|
| Freq. | Reading | AF | Cable Loss | Pre-amp | Filter | Level | Limit | Margin | Mark |
| (MHz) | (dBμV) | (dB/m) | (dB) | (dB) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | (P/Q/A) |
| * 1125.07 | 61.55 | 25.08 | 1.80 | 47.28 | 0.41 | 41.56 | 74.00 | -32.44 | P |
| * 1125.07 | 55.72 | 25.08 | 1.80 | 47.28 | 0.41 | 35.73 | 54.00 | -18.27 | A |
| * 1188.24 | 62.52 | 25.32 | 1.85 | 47.24 | 0.42 | 42.87 | 74.00 | -31.13 | P |
| * 1188.24 | 55.73 | 25.32 | 1.85 | 47.24 | 0.42 | 36.08 | 54.00 | -17.92 | A |
| 1659.40 | 59.76 | 27.84 | 2.22 | 46.95 | 0.63 | 43.50 | 74.00 | -30.50 | P |
| 1659.40 | 53.26 | 27.84 | 2.22 | 46.95 | 0.63 | 37.00 | 54.00 | -17.00 | A |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | P |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | A |

| TX / IEEE 802.11n HT20 mode / CH Low | | | | | Measurement Distance at 3m | | | Vertical polarity | |
|--------------------------------------|---------|--------|------------|---------|----------------------------|----------|----------|-------------------|---------|
| Freq. | Reading | AF | Cable Loss | Pre-amp | Filter | Level | Limit | Margin | Mark |
| (MHz) | (dBμV) | (dB/m) | (dB) | (dB) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | (P/Q/A) |
| * 1124.94 | 63.42 | 25.07 | 1.80 | 47.28 | 0.41 | 43.43 | 74.00 | -30.57 | P |
| * 1124.94 | 57.68 | 25.07 | 1.80 | 47.28 | 0.41 | 37.69 | 54.00 | -16.31 | A |
| * 1187.86 | 63.48 | 25.31 | 1.85 | 47.24 | 0.42 | 43.83 | 74.00 | -30.17 | P |
| * 1187.86 | 58.55 | 25.31 | 1.85 | 47.24 | 0.42 | 38.90 | 54.00 | -15.10 | A |
| 1659.60 | 60.68 | 27.84 | 2.22 | 46.95 | 0.63 | 44.42 | 74.00 | -29.58 | P |
| 1659.60 | 54.98 | 27.84 | 2.22 | 46.95 | 0.63 | 38.72 | 54.00 | -15.28 | A |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | P |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | A |

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter , Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

| | | | |
|---------------------|--|---------------------------|------------|
| Product Name | Pro Single Deck Media player w/platter | Test Date | 2018/04/03 |
| Model | SC5000M PRIME | Test By | Ted Huang |
| Test Mode | IEEE 802.11n HT20 TX (CH Middle) | TEMP& Humidity | 26.2 , 43% |

| TX / IEEE 802.11n HT20 mode / CH Middle | | | | | Measurement Distance at 3m | | | | Horizontal polarity | |
|---|---------|--------|------------|---------|----------------------------|----------|----------|--------|---------------------|--|
| Freq. | Reading | AF | Cable Loss | Pre-amp | Filter | Level | Limit | Margin | Mark | |
| (MHz) | (dBμV) | (dB/m) | (dB) | (dB) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | (P/Q/A) | |
| * 1125.13 | 61.56 | 25.08 | 1.80 | 47.28 | 0.41 | 41.57 | 74.00 | -32.43 | P | |
| * 1125.13 | 55.78 | 25.08 | 1.80 | 47.28 | 0.41 | 35.79 | 54.00 | -18.21 | A | |
| * 1188.16 | 62.21 | 25.32 | 1.85 | 47.24 | 0.42 | 42.56 | 74.00 | -31.44 | P | |
| * 1188.16 | 55.64 | 25.32 | 1.85 | 47.24 | 0.42 | 35.99 | 54.00 | -18.01 | A | |
| 1659.54 | 59.82 | 27.84 | 2.22 | 46.95 | 0.63 | 43.56 | 74.00 | -30.44 | P | |
| 1659.54 | 57.82 | 27.84 | 2.22 | 46.95 | 0.63 | 41.56 | 54.00 | -12.44 | A | |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | P | |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | A | |

| TX / IEEE 802.11n HT20 mode / CH Middle | | | | | Measurement Distance at 3m | | | | Vertical polarity | |
|---|---------|--------|------------|---------|----------------------------|----------|----------|--------|-------------------|--|
| Freq. | Reading | AF | Cable Loss | Pre-amp | Filter | Level | Limit | Margin | Mark | |
| (MHz) | (dBμV) | (dB/m) | (dB) | (dB) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | (P/Q/A) | |
| * 1124.88 | 63.76 | 25.07 | 1.80 | 47.28 | 0.41 | 43.77 | 74.00 | -30.23 | P | |
| * 1124.88 | 57.89 | 25.07 | 1.80 | 47.28 | 0.41 | 37.90 | 54.00 | -16.10 | A | |
| * 1187.90 | 63.45 | 25.31 | 1.85 | 47.24 | 0.42 | 43.80 | 74.00 | -30.20 | P | |
| * 1187.90 | 58.68 | 25.31 | 1.85 | 47.24 | 0.42 | 39.03 | 54.00 | -14.97 | A | |
| 1659.63 | 60.34 | 27.84 | 2.22 | 46.95 | 0.63 | 44.08 | 74.00 | -29.92 | P | |
| 1659.63 | 54.86 | 27.84 | 2.22 | 46.95 | 0.63 | 38.60 | 54.00 | -15.40 | A | |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | P | |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | A | |

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter}, \text{Margin} = \text{Level} - \text{Limit}$$
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

| | | | |
|---------------------|--|---------------------------|------------|
| Product Name | Pro Single Deck Media player w/platter | Test Date | 2018/04/03 |
| Model | SC5000M PRIME | Test By | Ted Huang |
| Test Mode | IEEE 802.11n HT20 TX (CH High) | TEMP& Humidity | 26.2 , 43% |

| TX / IEEE 802.11n HT20 mode / CH High | | | | | Measurement Distance at 3m | | | Horizontal polarity | | |
|---------------------------------------|---------|--------|------------|---------|----------------------------|----------|----------|---------------------|---------|--|
| Freq. | Reading | AF | Cable Loss | Pre-amp | Filter | Level | Limit | Margin | Mark | |
| (MHz) | (dBμV) | (dB/m) | (dB) | (dB) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | (P/Q/A) | |
| * 1125.00 | 61.76 | 25.08 | 1.80 | 47.28 | 0.41 | 41.77 | 74.00 | -32.23 | P | |
| * 1125.00 | 55.82 | 25.08 | 1.80 | 47.28 | 0.41 | 35.83 | 54.00 | -18.17 | A | |
| * 1188.10 | 62.25 | 25.31 | 1.85 | 47.24 | 0.42 | 42.60 | 74.00 | -31.40 | P | |
| * 1188.10 | 55.74 | 25.31 | 1.85 | 47.24 | 0.42 | 36.09 | 54.00 | -17.91 | A | |
| 1659.58 | 59.86 | 27.84 | 2.22 | 46.95 | 0.63 | 43.60 | 74.00 | -30.40 | P | |
| 1659.58 | 53.34 | 27.84 | 2.22 | 46.95 | 0.63 | 37.08 | 54.00 | -16.92 | A | |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | P | |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | A | |

| TX / IEEE 802.11n HT20 mode / CH High | | | | | Measurement Distance at 3m | | | Vertical polarity | | |
|---------------------------------------|---------|--------|------------|---------|----------------------------|----------|----------|-------------------|---------|--|
| Freq. | Reading | AF | Cable Loss | Pre-amp | Filter | Level | Limit | Margin | Mark | |
| (MHz) | (dBμV) | (dB/m) | (dB) | (dB) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | (P/Q/A) | |
| * 1124.98 | 63.82 | 25.07 | 1.80 | 47.28 | 0.41 | 43.83 | 74.00 | -30.17 | P | |
| * 1124.98 | 57.96 | 25.07 | 1.80 | 47.28 | 0.41 | 37.97 | 54.00 | -16.03 | A | |
| * 1187.98 | 63.56 | 25.31 | 1.85 | 47.24 | 0.42 | 43.91 | 74.00 | -30.09 | P | |
| * 1187.98 | 58.75 | 25.31 | 1.85 | 47.24 | 0.42 | 39.10 | 54.00 | -14.90 | A | |
| 1659.64 | 60.28 | 27.84 | 2.22 | 46.95 | 0.63 | 44.02 | 74.00 | -29.98 | P | |
| 1659.64 | 55.17 | 27.84 | 2.22 | 46.95 | 0.63 | 38.91 | 54.00 | -15.09 | A | |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | P | |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | A | |

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter , Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

| | | | |
|---------------------|--|---------------------------|------------|
| Product Name | Pro Single Deck Media player w/platter | Test Date | 2018/04/03 |
| Model | SC5000M PRIME | Test By | Ted Huang |
| Test Mode | Bluetooth 4.0 TX (CH Low) | TEMP& Humidity | 26.2 , 43% |

| TX / Bluetooth 4.0 (GFSK) mode / CH Low | | | | Measurement Distance at 3m | | | | Horizontal polarity | |
|---|---------|--------|------------|----------------------------|--------|----------|----------|---------------------|---------|
| Freq. | Reading | AF | Cable Loss | Pre-amp | Filter | Level | Limit | Margin | Mark |
| (MHz) | (dBμV) | (dB/m) | (dB) | (dB) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | (P/Q/A) |
| * 1125.00 | 61.42 | 25.08 | 1.80 | 47.28 | 0.41 | 41.43 | 74.00 | -32.57 | P |
| * 1125.00 | 55.65 | 25.08 | 1.80 | 47.28 | 0.41 | 35.66 | 54.00 | -18.34 | A |
| 1659.56 | 59.68 | 27.84 | 2.22 | 46.95 | 0.63 | 43.42 | 74.00 | -30.58 | P |
| 1659.56 | 53.26 | 27.84 | 2.22 | 46.95 | 0.63 | 37.00 | 54.00 | -17.00 | A |
| * 4804.44 | 57.59 | 33.07 | 4.11 | 46.66 | 0.22 | 48.32 | 74.00 | -25.68 | P |
| * 4804.44 | 48.60 | 33.07 | 4.11 | 46.66 | 0.22 | 39.34 | 54.00 | -14.66 | A |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | P |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | A |

| TX / Bluetooth 4.0 (GFSK) mode / CH Low | | | | Measurement Distance at 3m | | | | Vertical polarity | |
|---|---------|--------|------------|----------------------------|--------|----------|----------|-------------------|---------|
| Freq. | Reading | AF | Cable Loss | Pre-amp | Filter | Level | Limit | Margin | Mark |
| (MHz) | (dBμV) | (dB/m) | (dB) | (dB) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | (P/Q/A) |
| * 1124.95 | 63.72 | 25.07 | 1.80 | 47.28 | 0.41 | 43.73 | 74.00 | -30.27 | P |
| * 1124.95 | 57.82 | 25.07 | 1.80 | 47.28 | 0.41 | 37.83 | 54.00 | -16.17 | A |
| 1659.53 | 60.42 | 27.84 | 2.22 | 46.95 | 0.63 | 44.16 | 74.00 | -29.84 | P |
| 1659.53 | 54.86 | 27.84 | 2.22 | 46.95 | 0.63 | 38.60 | 54.00 | -15.40 | A |
| * 4804.07 | 57.63 | 33.07 | 4.11 | 46.66 | 0.22 | 48.37 | 74.00 | -25.63 | P |
| * 4804.07 | 47.18 | 33.07 | 4.11 | 46.66 | 0.22 | 37.91 | 54.00 | -16.09 | A |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | P |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | A |

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter , Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

| | | | |
|---------------------|--|---------------------------|------------|
| Product Name | Pro Single Deck Media player w/platter | Test Date | 2018/04/03 |
| Model | SC5000M PRIME | Test By | Ted Huang |
| Test Mode | Bluetooth 4.0 TX (CH Middle) | TEMP& Humidity | 26.2 , 43% |

| TX / Bluetooth 4.0 (GFSK) mode / CH Middle | | | | Measurement Distance at 3m | | | | Horizontal polarity | |
|--|---------|--------|------------|----------------------------|--------|----------|----------|---------------------|---------|
| Freq. | Reading | AF | Cable Loss | Pre-amp | Filter | Level | Limit | Margin | Mark |
| (MHz) | (dBμV) | (dB/m) | (dB) | (dB) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | (P/Q/A) |
| * 1125.01 | 61.28 | 25.08 | 1.80 | 47.28 | 0.41 | 41.29 | 74.00 | -32.71 | P |
| * 1125.01 | 55.48 | 25.08 | 1.80 | 47.28 | 0.41 | 35.49 | 54.00 | -18.51 | A |
| 1659.57 | 59.72 | 27.84 | 2.22 | 46.95 | 0.63 | 43.46 | 74.00 | -30.54 | P |
| 1659.57 | 53.46 | 27.84 | 2.22 | 46.95 | 0.63 | 37.20 | 54.00 | -16.80 | A |
| * 4883.42 | 57.82 | 33.33 | 4.16 | 46.68 | 0.23 | 48.85 | 74.00 | -25.15 | P |
| * 4883.42 | 48.22 | 33.33 | 4.16 | 46.68 | 0.23 | 39.26 | 54.00 | -14.74 | A |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | P |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | A |

| TX / Bluetooth 4.0 (GFSK) mode / CH Middle | | | | Measurement Distance at 3m | | | | Vertical polarity | |
|--|---------|--------|------------|----------------------------|--------|----------|----------|-------------------|---------|
| Freq. | Reading | AF | Cable Loss | Pre-amp | Filter | Level | Limit | Margin | Mark |
| (MHz) | (dBμV) | (dB/m) | (dB) | (dB) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | (P/Q/A) |
| * 1124.98 | 63.75 | 25.07 | 1.80 | 47.28 | 0.41 | 43.76 | 74.00 | -30.24 | P |
| * 1124.98 | 57.62 | 25.07 | 1.80 | 47.28 | 0.41 | 37.63 | 54.00 | -16.37 | A |
| 1659.60 | 60.36 | 27.84 | 2.22 | 46.95 | 0.63 | 44.10 | 74.00 | -29.90 | P |
| 1659.60 | 54.77 | 27.84 | 2.22 | 46.95 | 0.63 | 38.51 | 54.00 | -15.49 | A |
| * 4884.13 | 56.97 | 33.33 | 4.16 | 46.68 | 0.23 | 48.01 | 74.00 | -25.99 | P |
| * 4884.13 | 47.37 | 33.33 | 4.16 | 46.68 | 0.23 | 38.40 | 54.00 | -15.60 | A |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | P |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | A |

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter , Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

| | | | |
|---------------------|--|---------------------------|------------|
| Product Name | Pro Single Deck Media player w/platter | Test Date | 2018/04/03 |
| Model | SC5000M PRIME | Test By | Ted Huang |
| Test Mode | Bluetooth 4.0 TX (CH High) | TEMP& Humidity | 26.2 , 43% |

| TX / Bluetooth 4.0 (GFSK) mode / CH High | | | | | Measurement Distance at 3m | | | Horizontal polarity | | |
|--|---------|--------|------------|---------|----------------------------|----------|----------|---------------------|---------|--|
| Freq. | Reading | AF | Cable Loss | Pre-amp | Filter | Level | Limit | Margin | Mark | |
| (MHz) | (dBμV) | (dB/m) | (dB) | (dB) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | (P/Q/A) | |
| * 1125.02 | 61.63 | 25.08 | 1.80 | 47.28 | 0.41 | 41.64 | 74.00 | -32.36 | P | |
| * 1125.02 | 55.75 | 25.08 | 1.80 | 47.28 | 0.41 | 35.76 | 54.00 | -18.24 | A | |
| 1659.56 | 59.76 | 27.84 | 2.22 | 46.95 | 0.63 | 43.50 | 74.00 | -30.50 | P | |
| 1659.56 | 53.38 | 27.84 | 2.22 | 46.95 | 0.63 | 37.12 | 54.00 | -16.88 | A | |
| * 4960.12 | 57.55 | 33.57 | 4.21 | 46.70 | 0.24 | 48.87 | 74.00 | -25.13 | P | |
| * 4960.12 | 46.91 | 33.57 | 4.21 | 46.70 | 0.24 | 38.23 | 54.00 | -15.77 | A | |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | P | |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | A | |

| TX / Bluetooth 4.0 (GFSK) mode / CH High | | | | | Measurement Distance at 3m | | | Vertical polarity | | |
|--|---------|--------|------------|---------|----------------------------|----------|----------|-------------------|---------|--|
| Freq. | Reading | AF | Cable Loss | Pre-amp | Filter | Level | Limit | Margin | Mark | |
| (MHz) | (dBμV) | (dB/m) | (dB) | (dB) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | (P/Q/A) | |
| * 1124.96 | 63.85 | 25.07 | 1.80 | 47.28 | 0.41 | 43.86 | 74.00 | -30.14 | P | |
| * 1124.96 | 57.93 | 25.07 | 1.80 | 47.28 | 0.41 | 37.94 | 54.00 | -16.06 | A | |
| 1659.57 | 60.54 | 27.84 | 2.22 | 46.95 | 0.63 | 44.28 | 74.00 | -29.72 | P | |
| 1659.57 | 54.80 | 27.84 | 2.22 | 46.95 | 0.63 | 38.54 | 54.00 | -15.46 | A | |
| * 4960.17 | 56.15 | 33.57 | 4.21 | 46.70 | 0.24 | 47.47 | 74.00 | -26.53 | P | |
| * 4960.17 | 45.68 | 33.57 | 4.21 | 46.70 | 0.24 | 37.00 | 54.00 | -17.00 | A | |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | P | |
| N/A | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | A | |

REMARK:


1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter , Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

8.6.4 RESTRICTED BAND EDGES

| | | | |
|-----------------|---------------|-----------|------------|
| Model Name | SC5000M PRIME | Test By | Ted Huang |
| Temp & Humidity | 26.2 , 43% | Test Date | 2018/04/03 |


Detector mode : Peak

Polarity : Horizontal

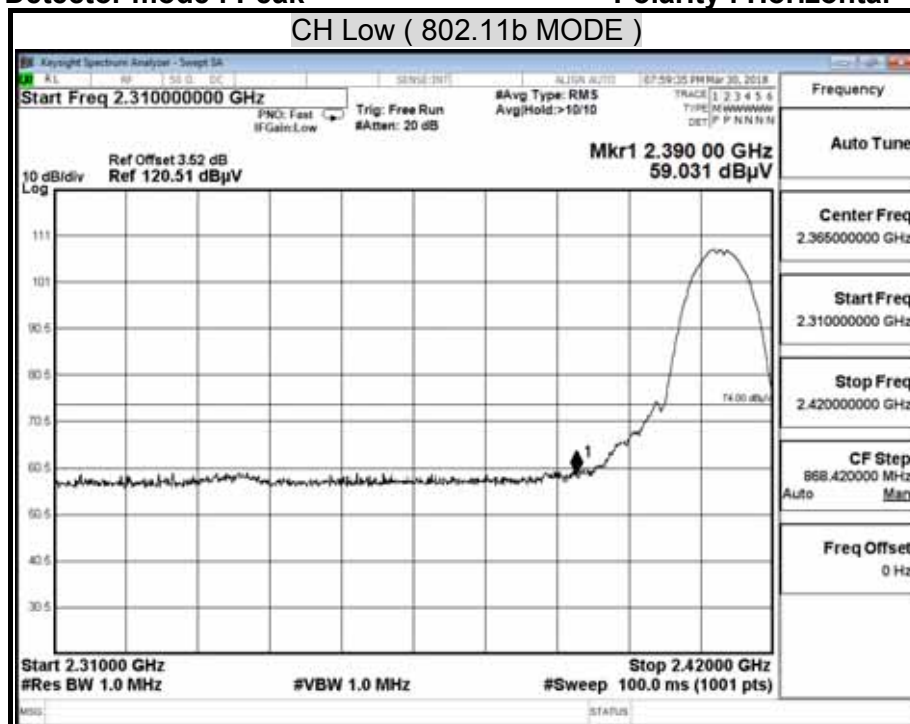


Detector mode : Average

Polarity : Horizontal

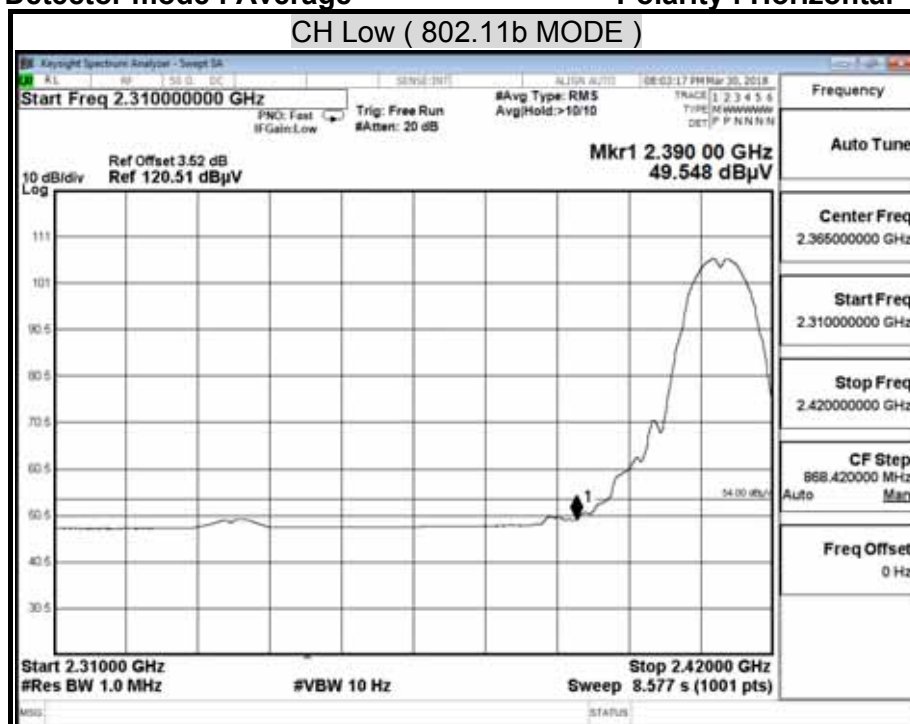

Detector mode : Peak

Polarity : Vertical

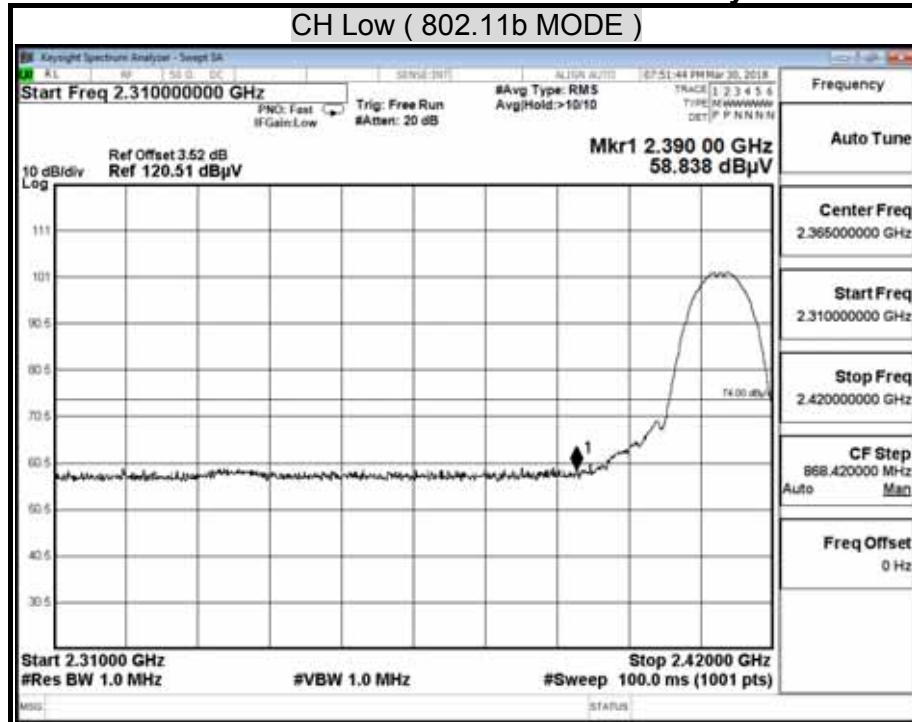


Detector mode : Average

Polarity : Vertical




Detector mode : Peak

Polarity : Horizontal

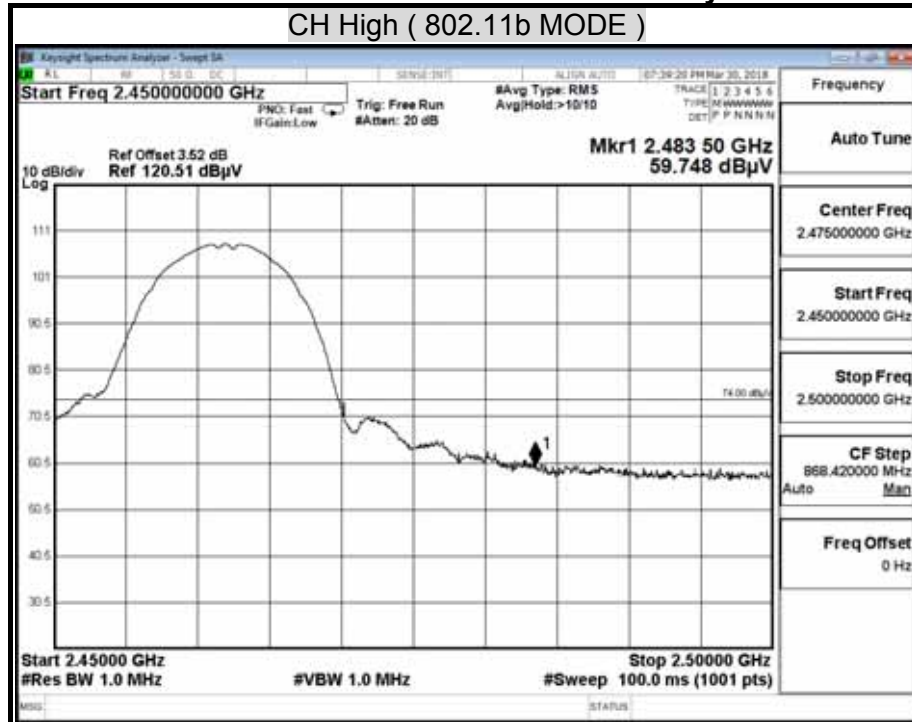


Detector mode : Average

Polarity : Horizontal

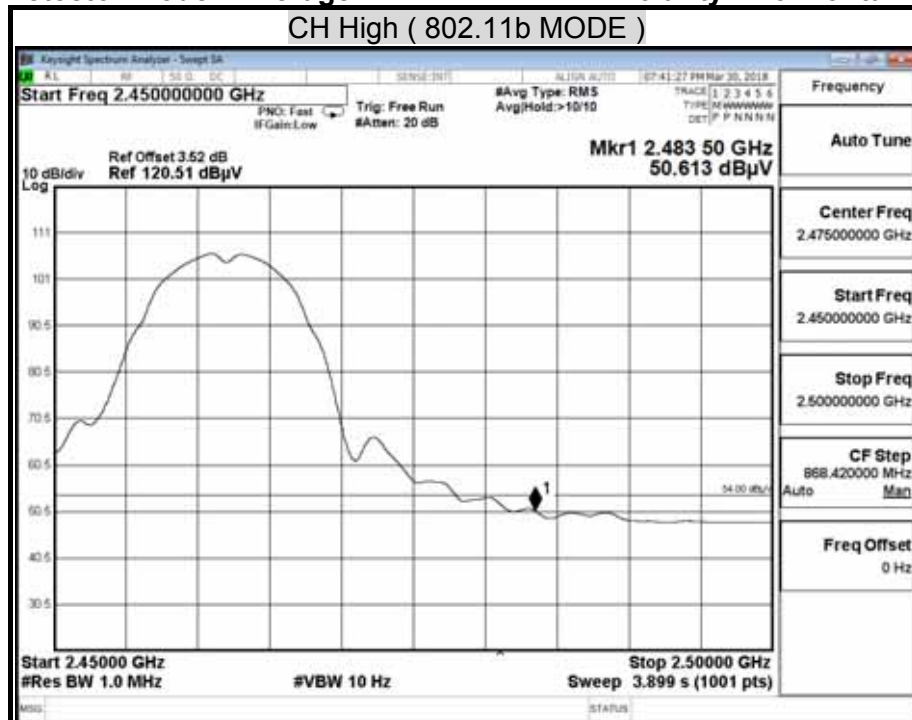


Detector mode : Peak

Polarity : Vertical

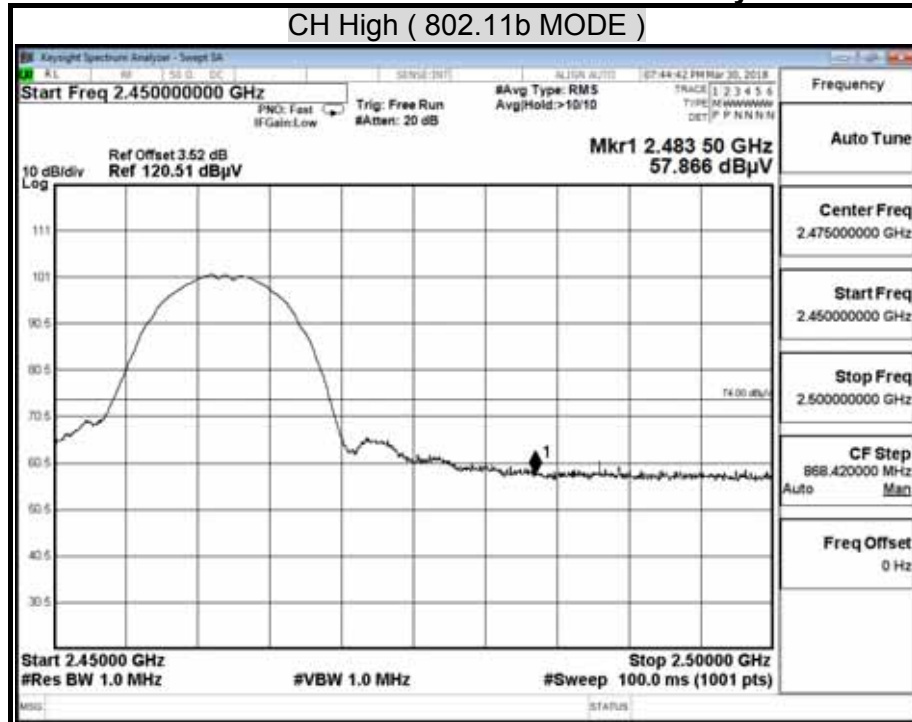

Detector mode : Average


Polarity : Vertical

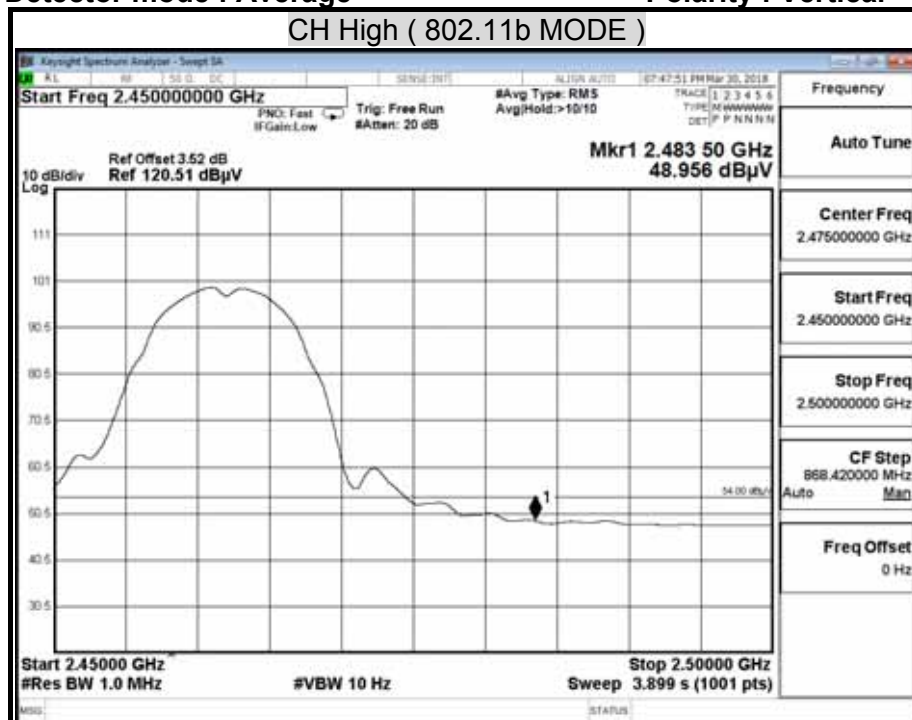

Detector mode : Peak

Polarity : Horizontal


CH Low (802.11g MODE)

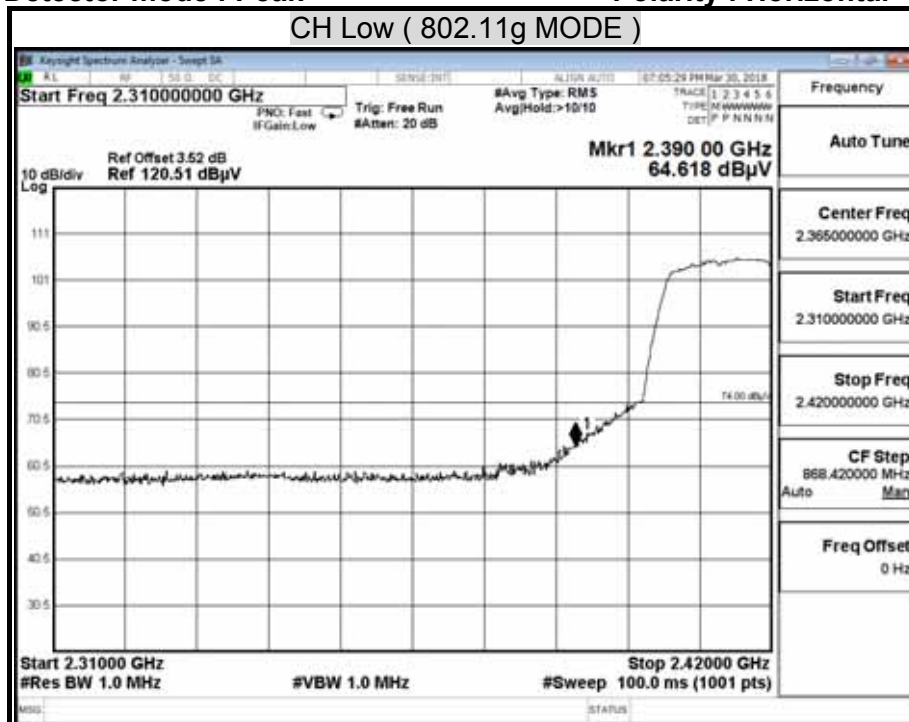

Detector mode : Average


Polarity : Horizontal

CH Low (802.11g MODE)

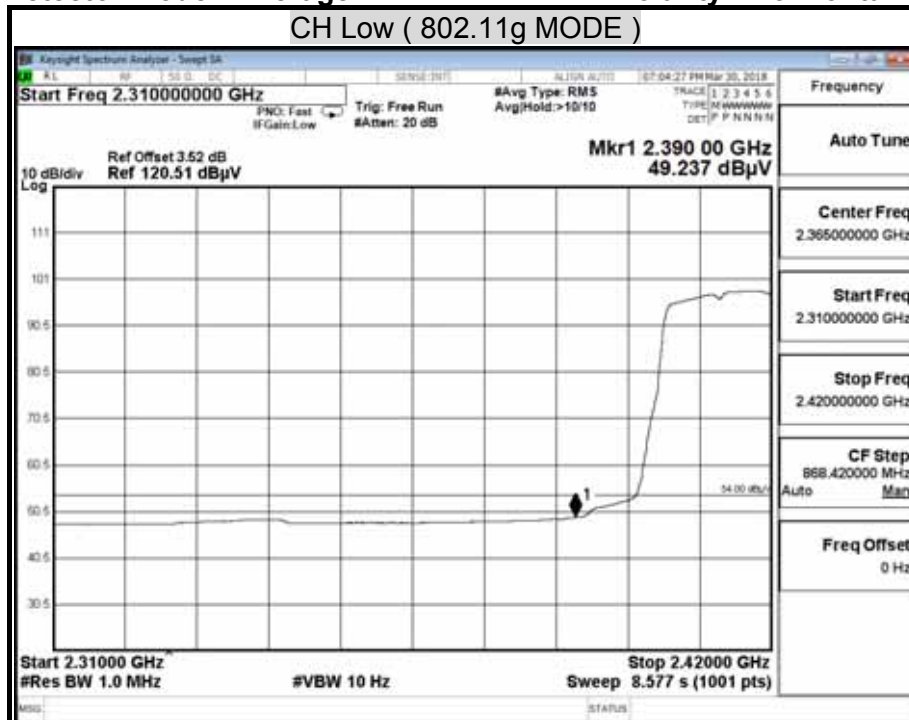


Detector mode : Peak

Polarity : Vertical

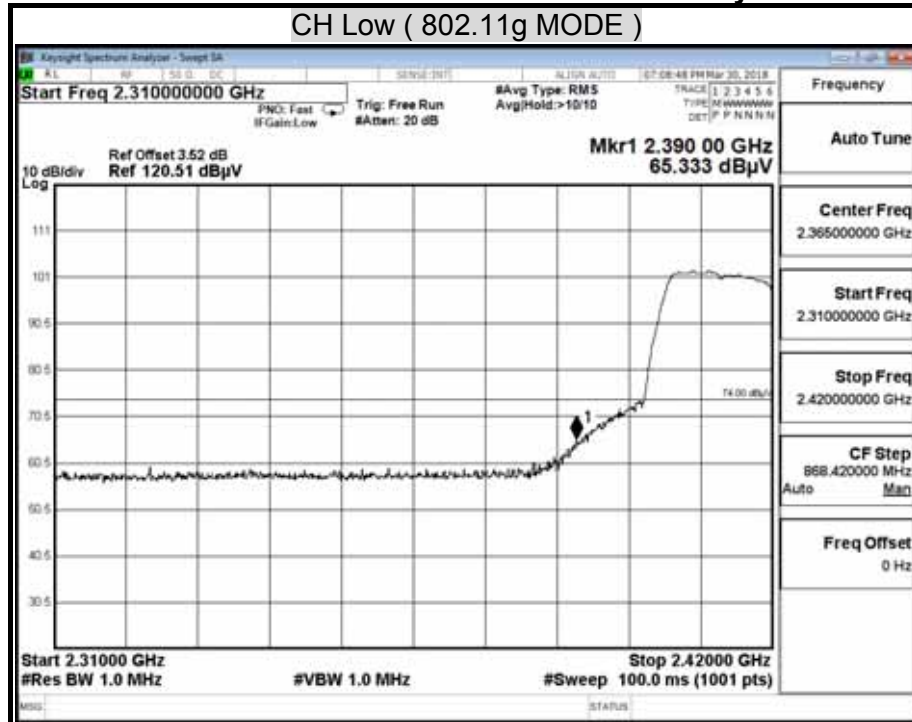


Detector mode : Average

Polarity : Vertical

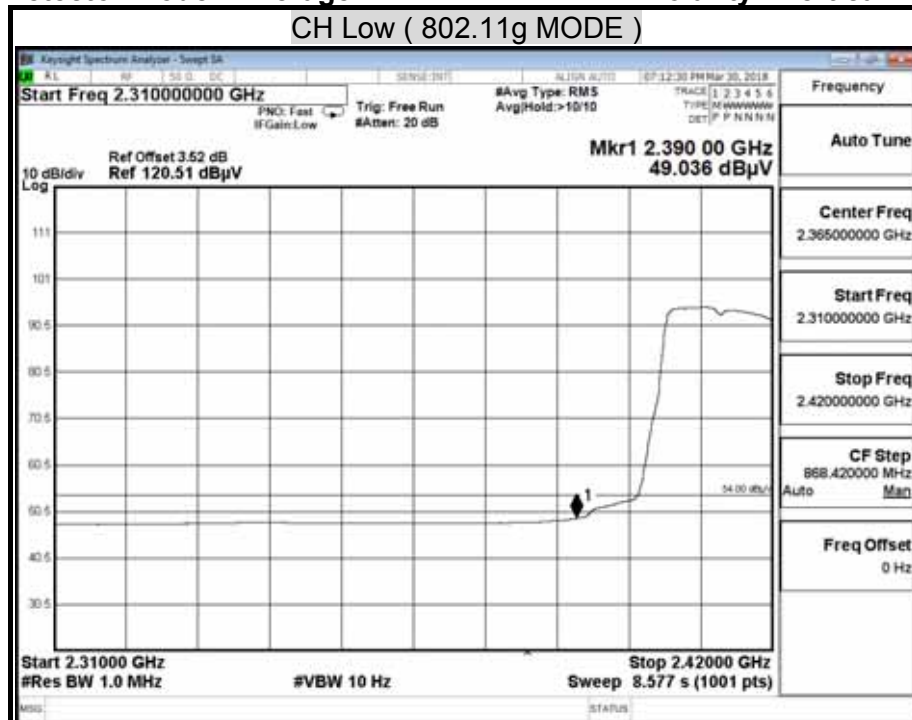


Detector mode : Peak

Polarity : Horizontal

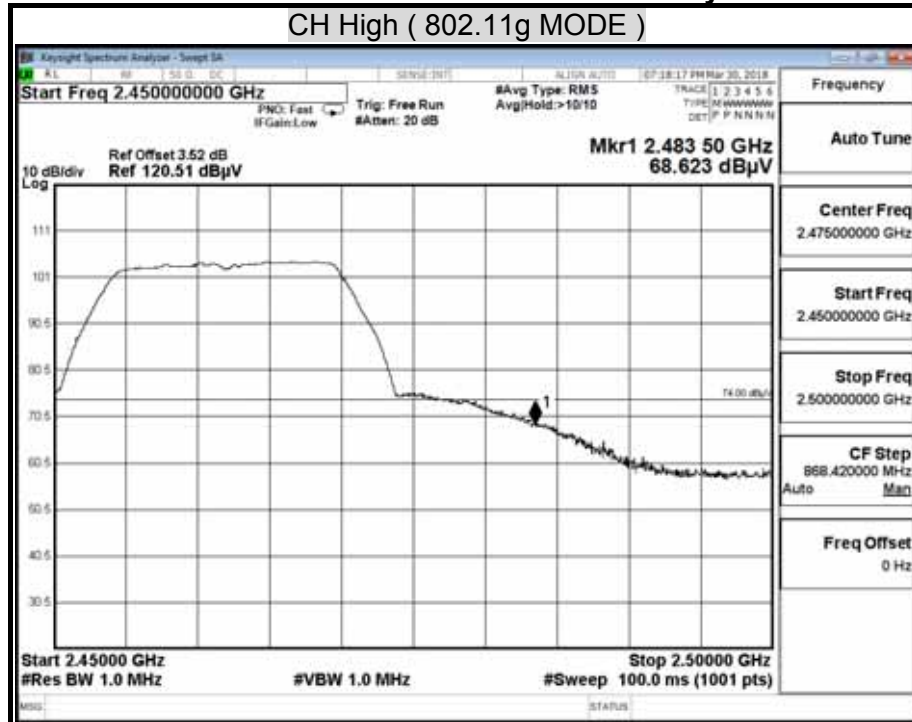


Detector mode : Average

Polarity : Horizontal

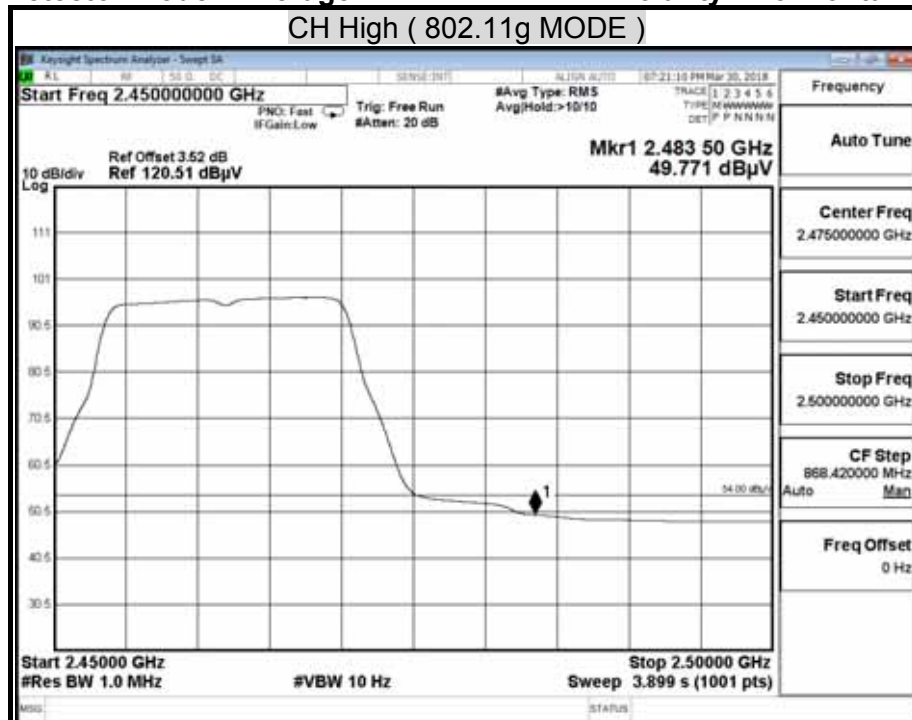


Detector mode : Peak

Polarity : Vertical

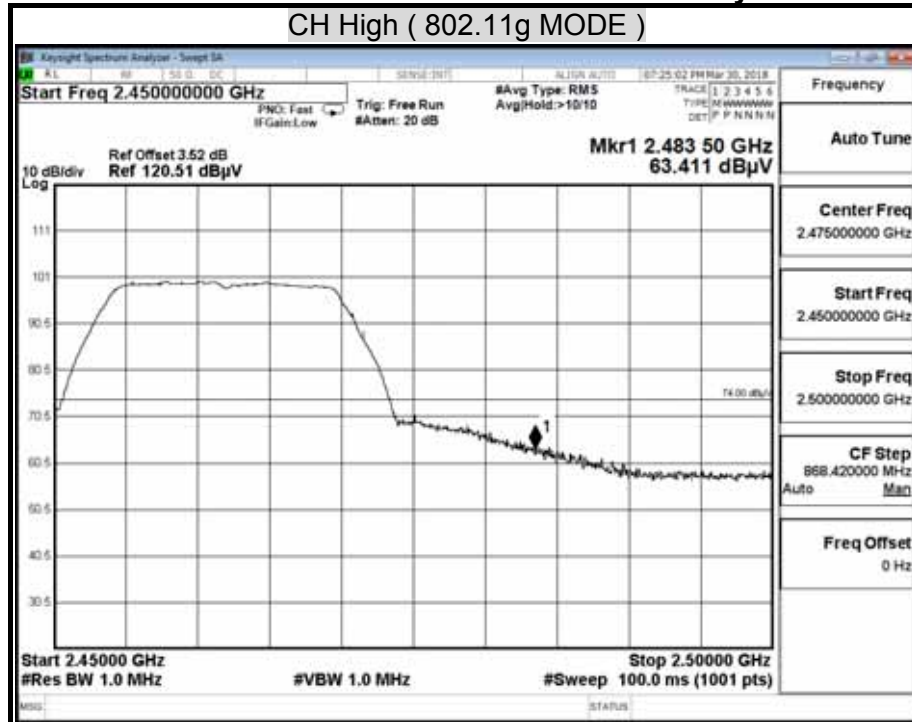

Detector mode : Average


Polarity : Vertical

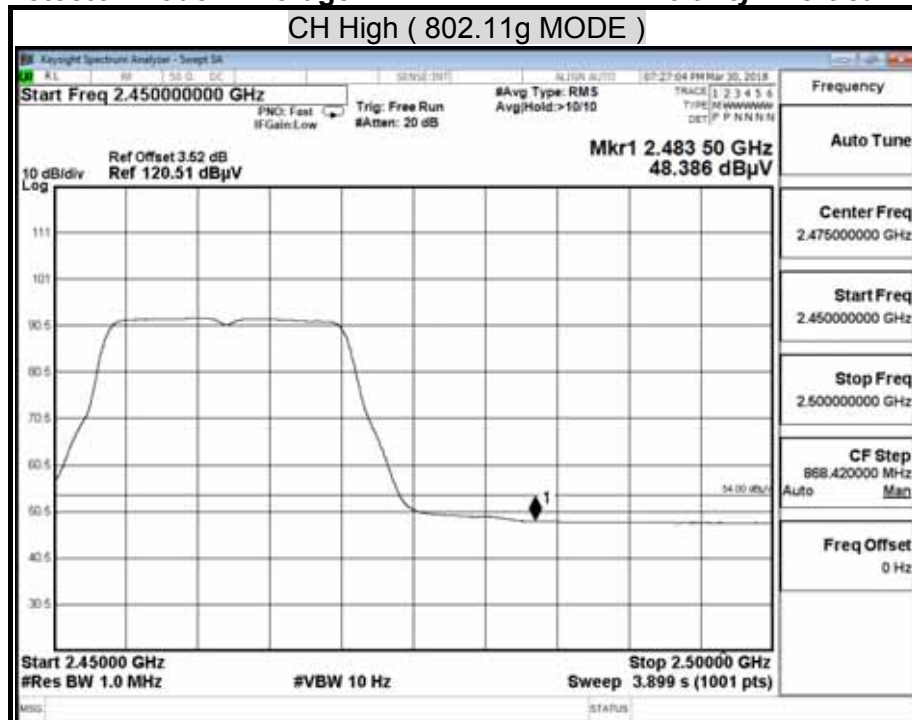

Detector mode : Peak

Polarity : Horizontal


CH Low (802.11n HT20 MODE)

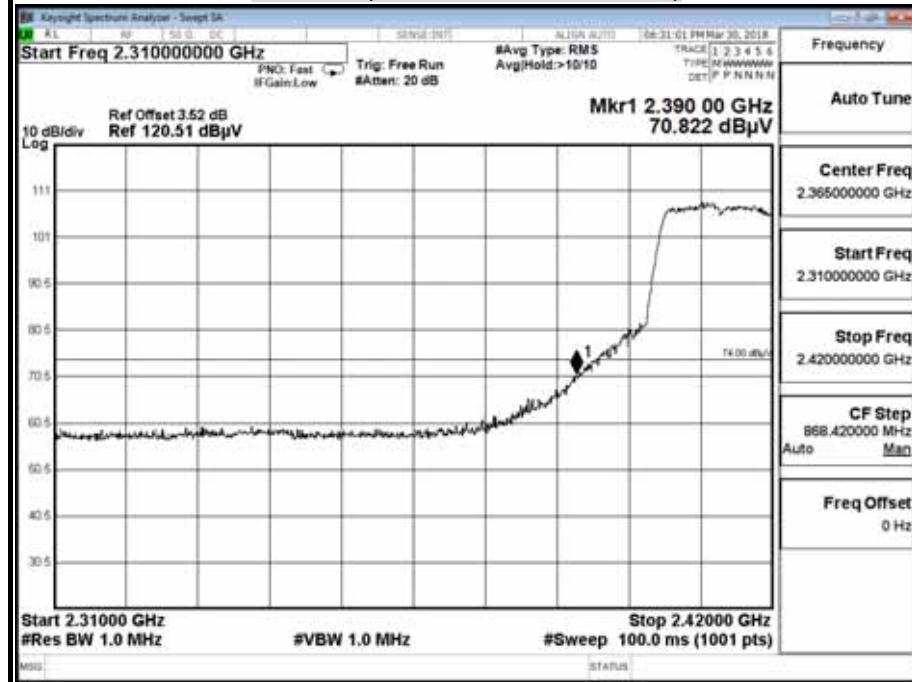

Detector mode : Average

Polarity : Horizontal


CH Low (802.11n HT20 MODE)

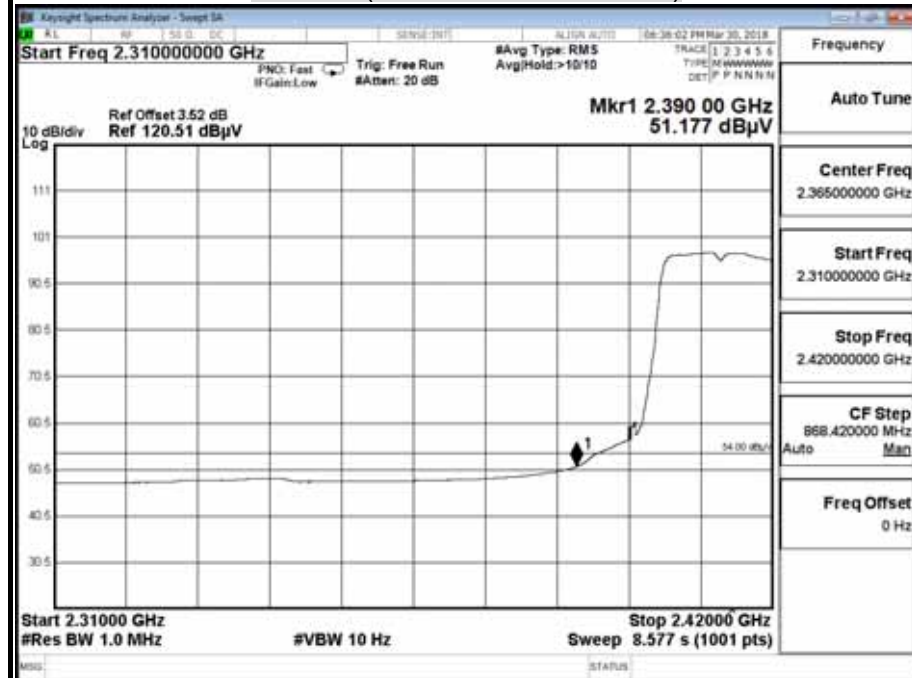

Detector mode : Peak

Polarity : Vertical


CH Low (802.11n HT20 MODE)

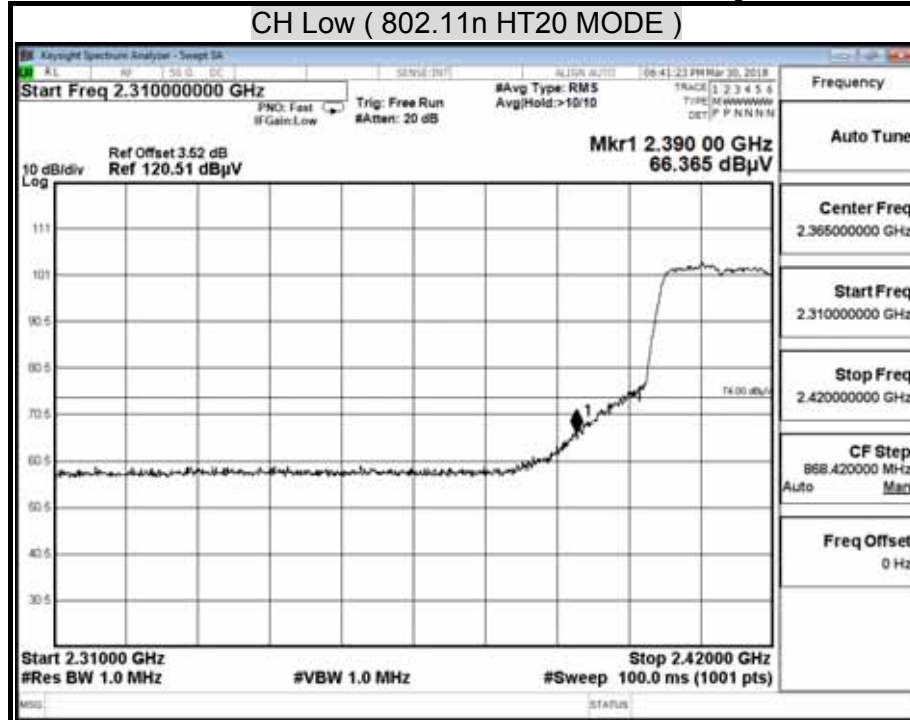

Detector mode : Average

Polarity : Vertical


CH Low (802.11n HT20 MODE)

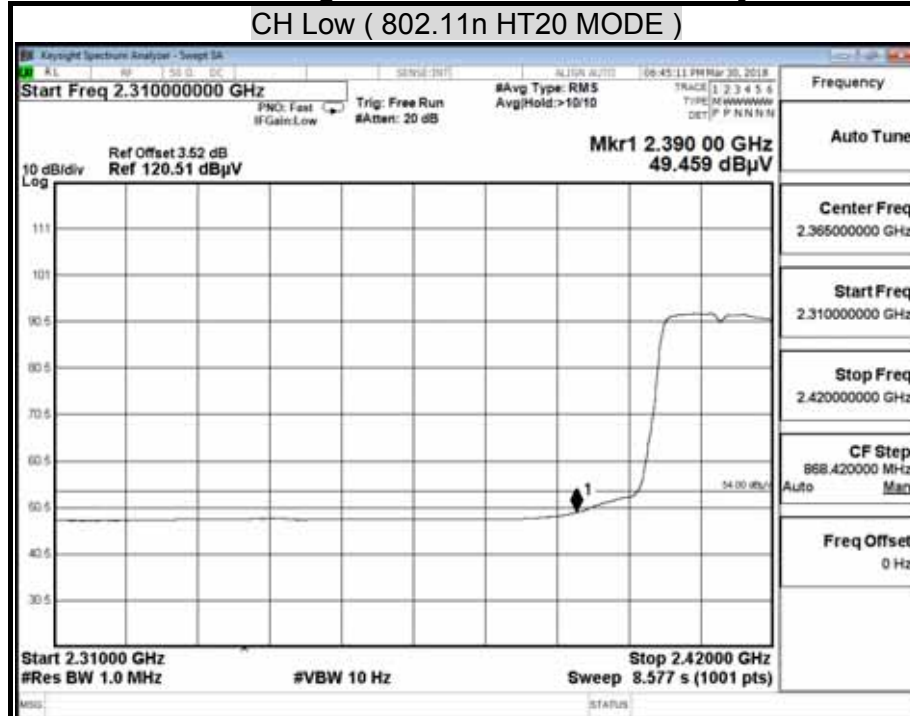

Detector mode : Peak

Polarity : Horizontal


CH High (802.11n HT20 MODE)

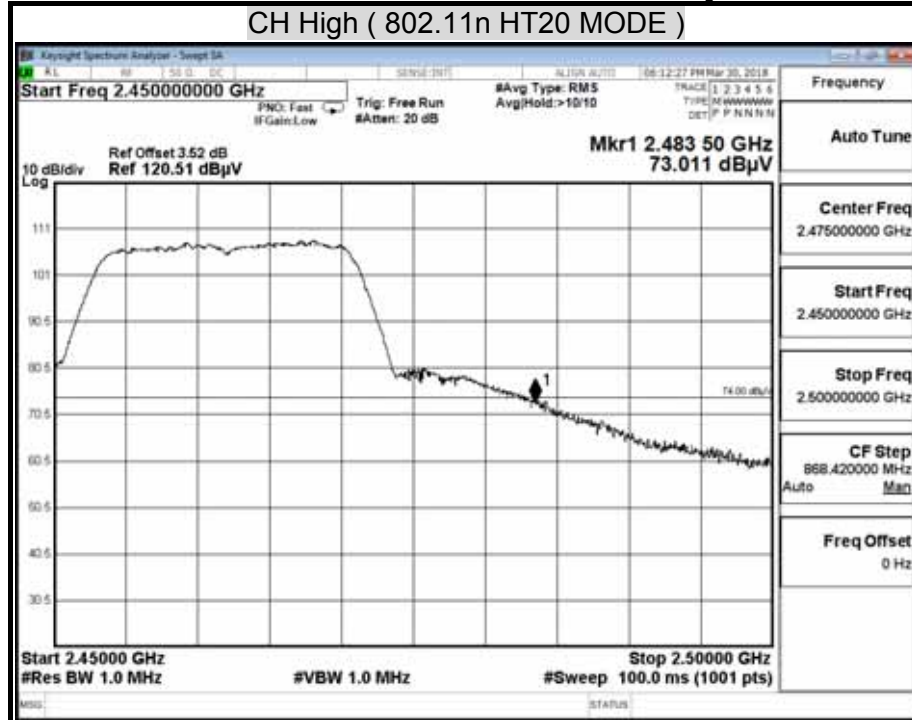

Detector mode : Average

Polarity : Horizontal


CH High (802.11n HT20 MODE)

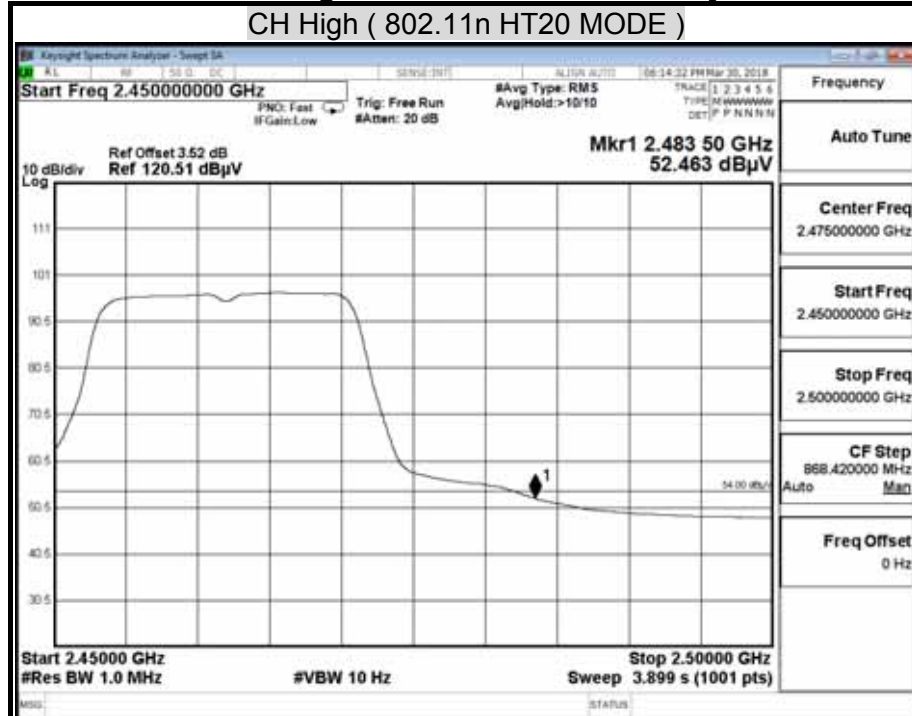

Detector mode : Peak

Polarity : Vertical


CH High (802.11n HT20 MODE)

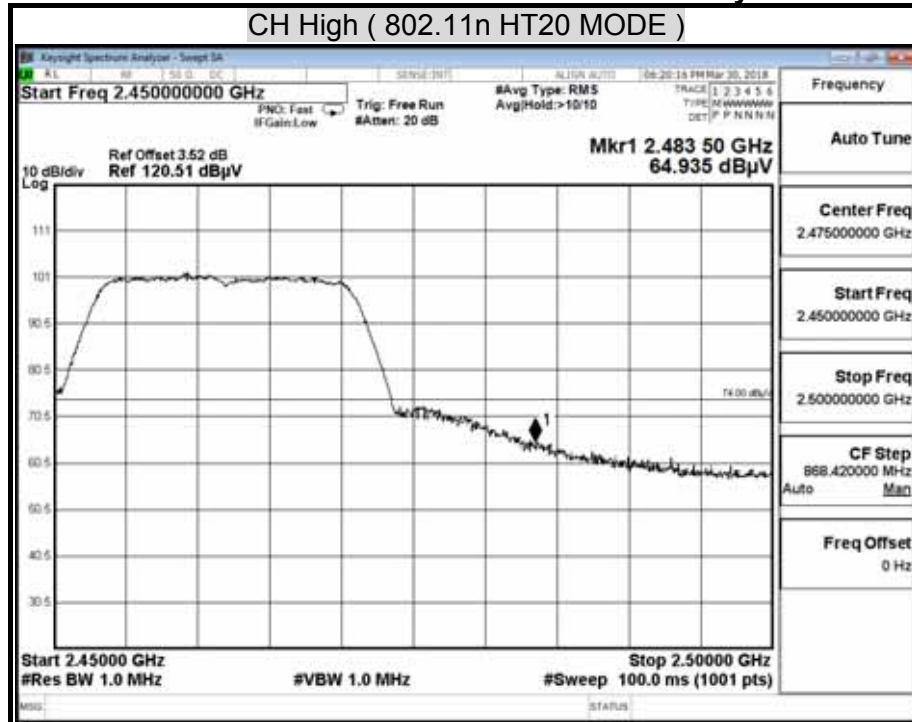

Detector mode : Average

Polarity : Vertical

CH High (802.11n HT20 MODE)

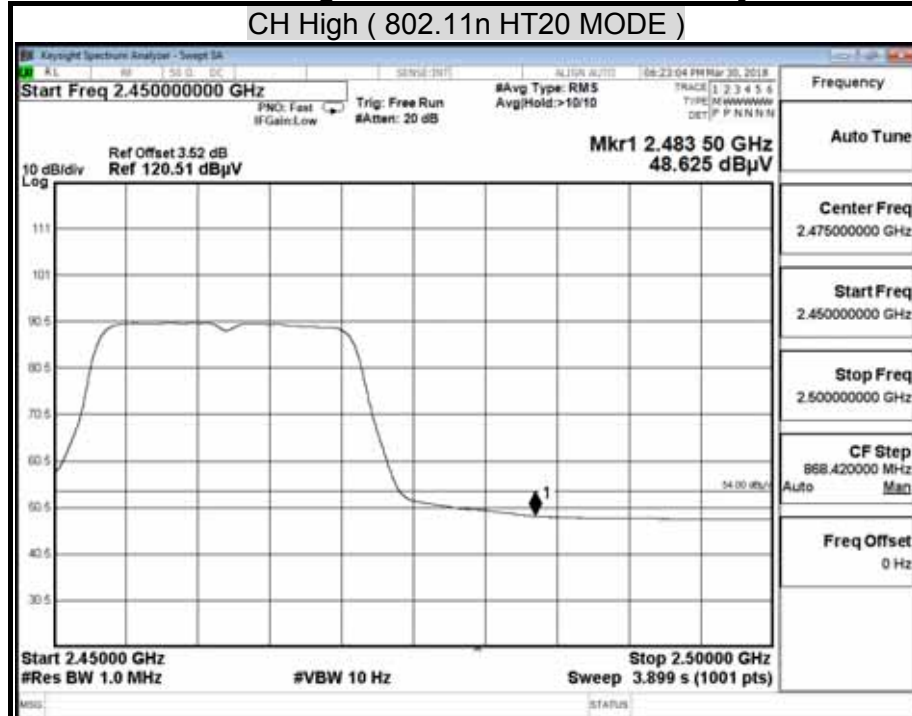


Bluetooth 4.0

| | | | |
|-----------------|---------------|-----------|------------|
| Model Name | SC5000M PRIME | Test By | Ted Huang |
| Temp & Humidity | 26.2 , 43% | Test Date | 2018/04/03 |


Detector mode : Peak

Polarity : Horizontal

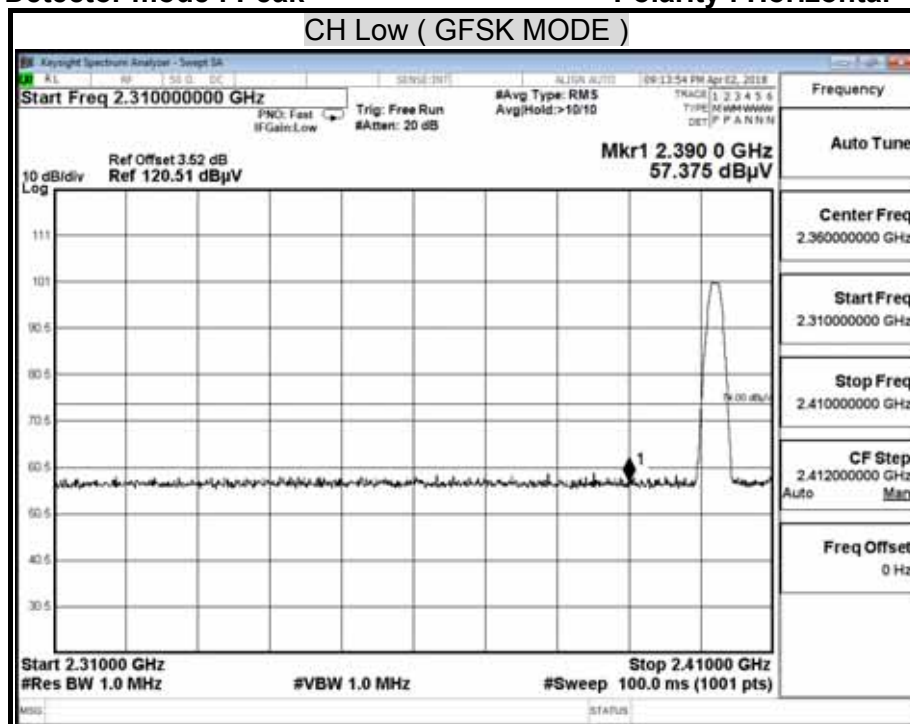


Detector mode : Average

Polarity : Horizontal

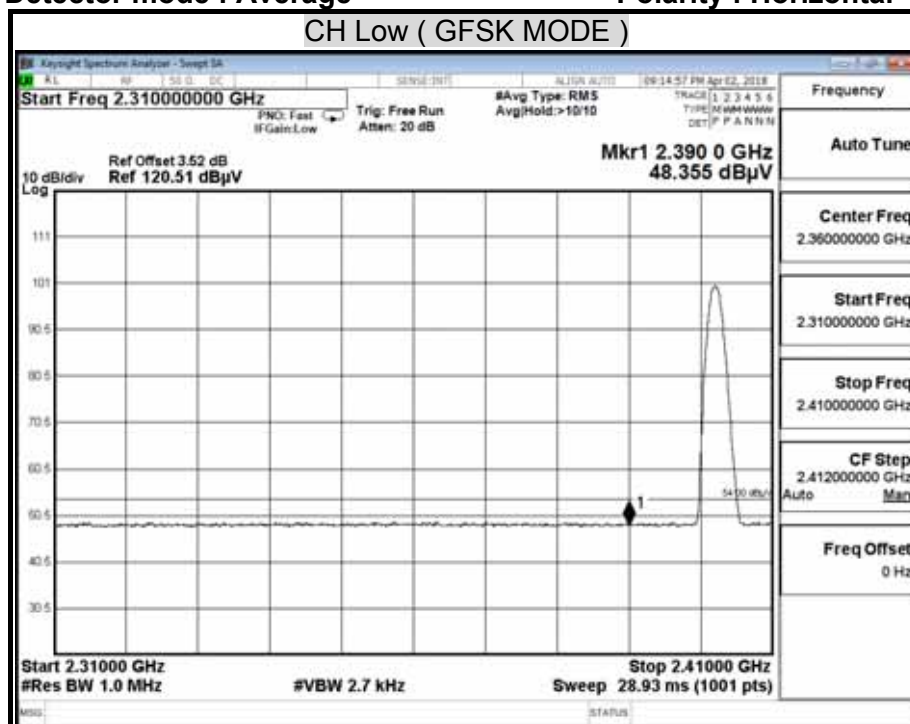


Detector mode : Peak

Polarity : Vertical

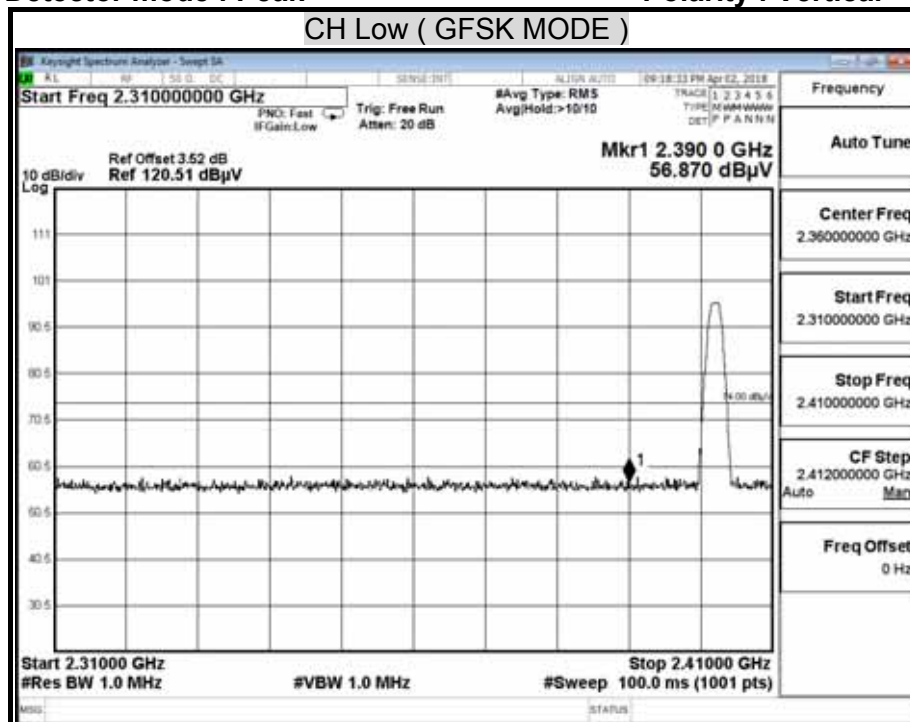


Detector mode : Average

Polarity : Vertical

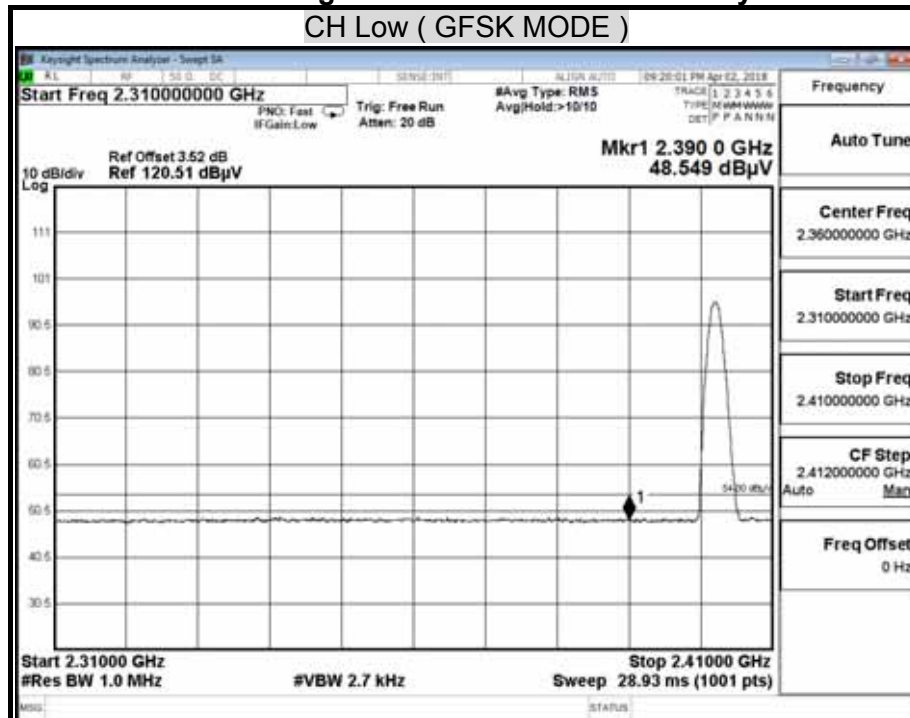


Detector mode : Peak

Polarity : Horizontal

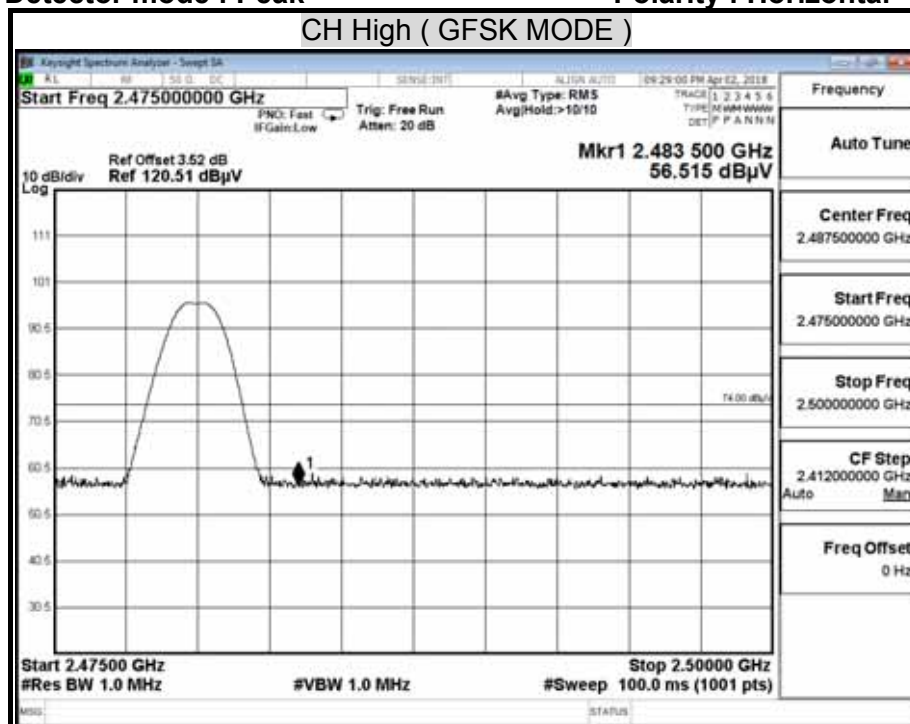


Detector mode : Average

Polarity : Horizontal

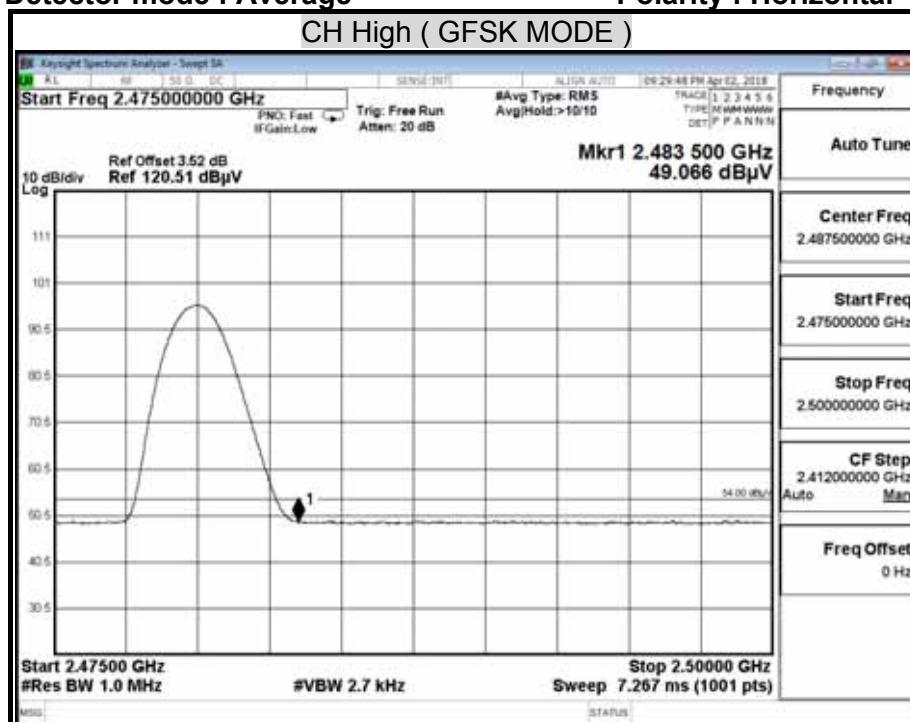


Detector mode : Peak

Polarity : Vertical

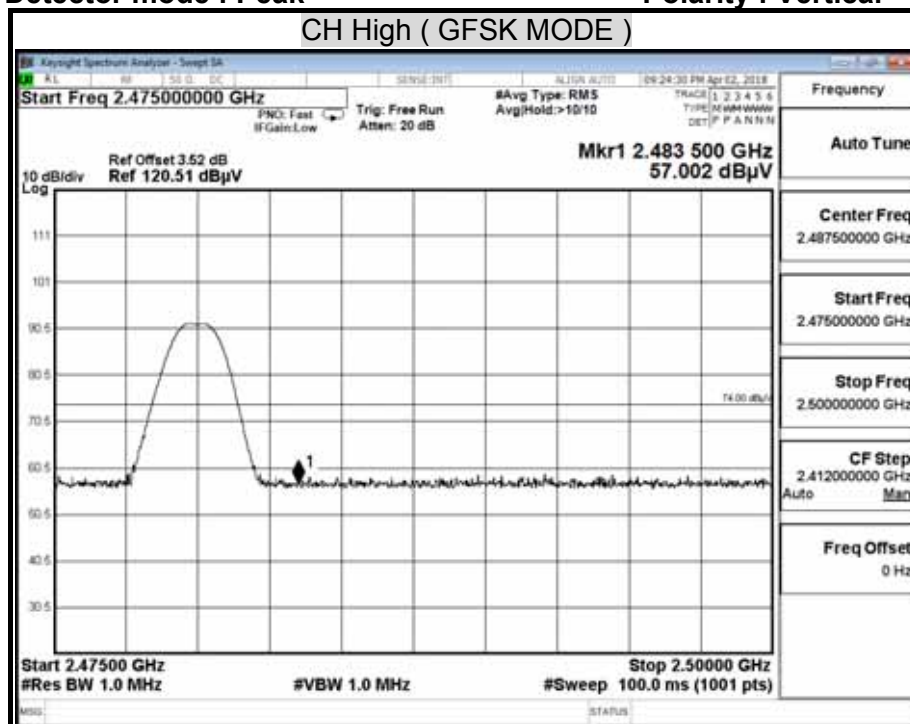

Detector mode : Average

Polarity : Vertical

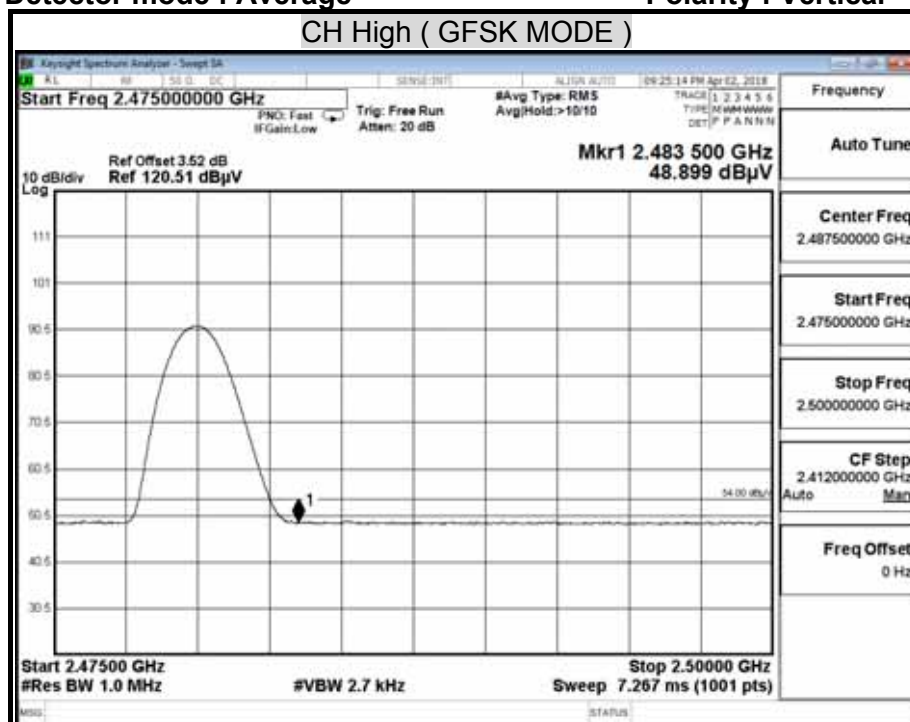

8.7 POWERLINE CONDUCTED EMISSIONS

LIMITS

§ 15.207 (a) Except as shown in paragraph (b) and (c) this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.


| Frequency of Emission (MHz) | Conducted limit (dB μ v) | |
|-----------------------------|------------------------------|----------|
| | Quasi-peak | Average |
| 0.15 - 0.5 | 66 to 56 | 56 to 46 |
| 0.5 - 5 | 56 | 46 |
| 5 - 30 | 60 | 50 |

TEST EQUIPMENTS

The following test equipments are used during the conducted power line tests :

| Conducted Emission room #1 | | | | |
|----------------------------|----------------|----------------------|---------------|-----------------|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due |
| BNC Coaxial Cable | CCS | BNC50 | 11 | 01/23/2019 |
| EMI Test Receiver | R&S | ESCS 30 | 100348 | 01/30/2019 |
| LISN | SCHWARZBECK | NNLK8130 | 8130124 | 11/30/2018 |
| LISN | FCC | FCC-LISN-50 -32-2 | 08009 | 05/23/2019 |
| Pulse Limiter | R&S | ESH3-Z2 | 100116 | 01/23/2019 |
| Software | e-3 (5.04211j) | | | |

TEST SETUP

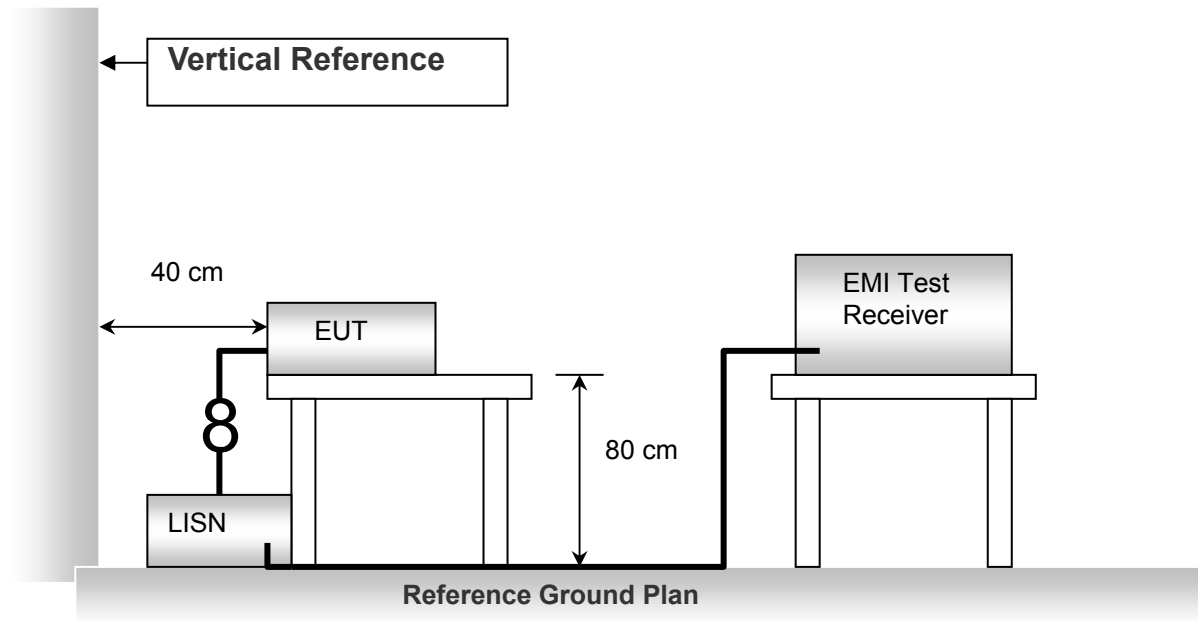

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80cm above the horizontal ground plane. The EUT IS CONFIGURED IN ACCORDANCE WITH ANSI C63.10.

The resolution bandwidth is set to 9 kHz for both quasi-peak detection and average detection measurements.

Line conducted data is recorded for both NEUTRAL and LINE.


TEST RESULTS

No non-compliance noted.

| | | | |
|--------------------------|---------------|----------------------|-------|
| Model No. | SC5000M PRIME | Test Mode | USB2 |
| Environmental Conditions | 21 , 69% RH | Resolution Bandwidth | 9 kHz |
| Tested by | Weici Lo | | |

Line

(The chart below shows the highest readings taken from the final data.)

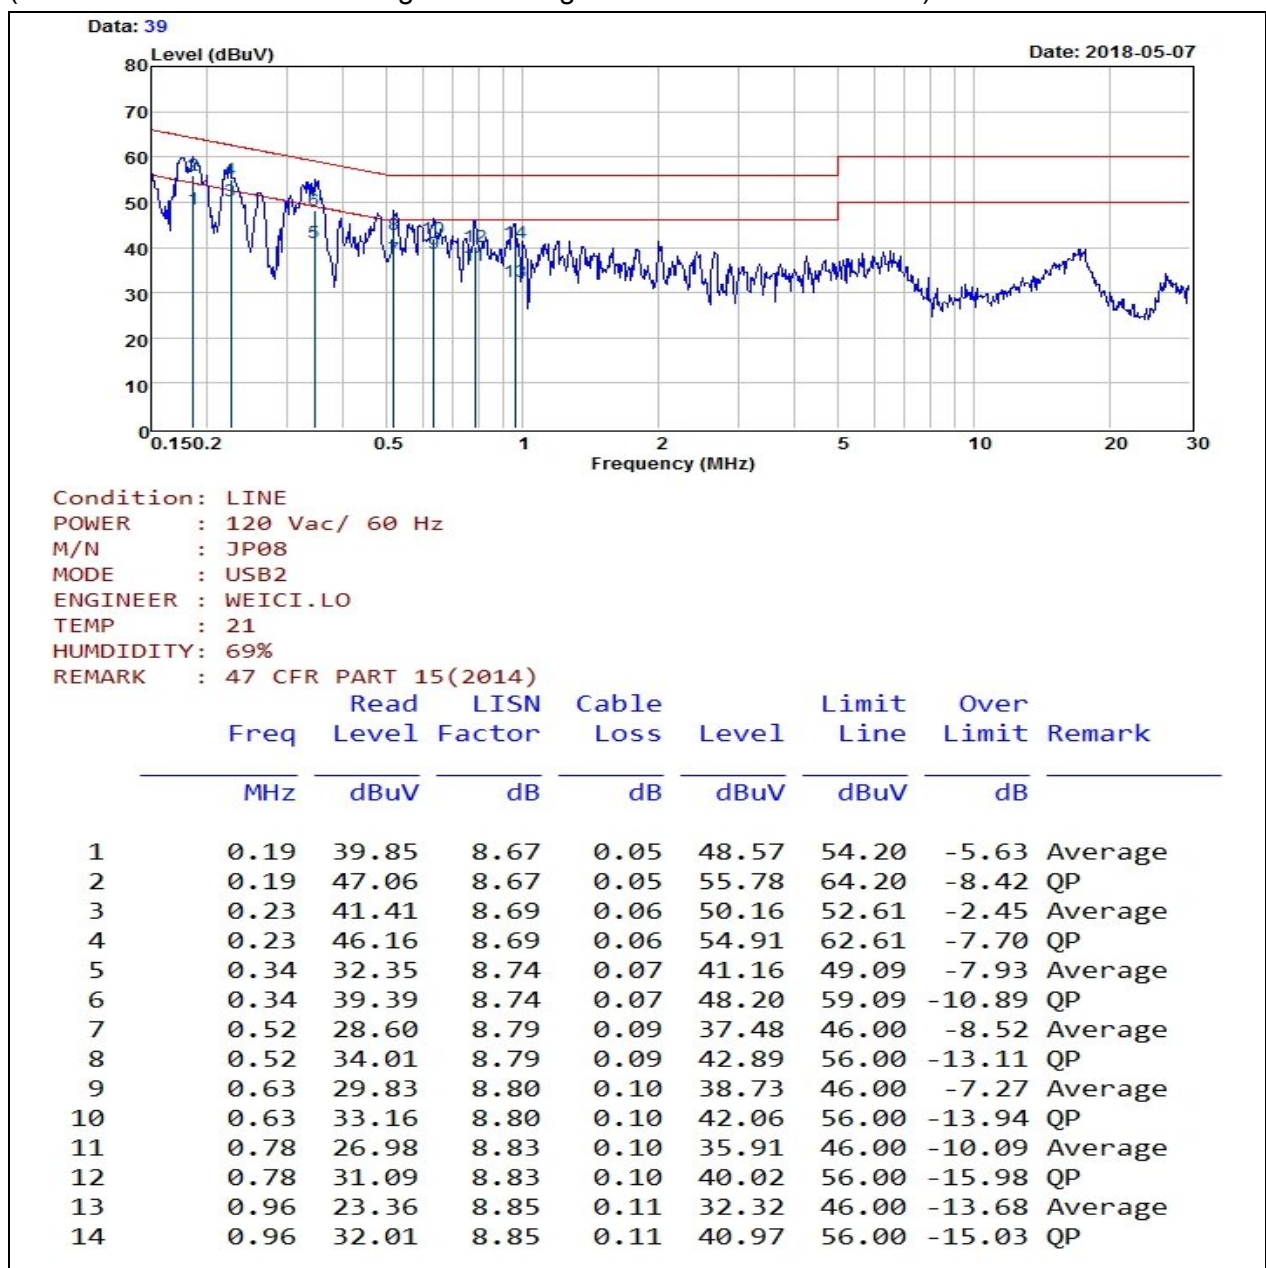


NOTE:

1. Measured Level (dBuV) = LISN Factor (dB) + Cable Loss (dB)+ Meter Reading (dBuV)
2. Over Limit (dBuV) = Measured Level (dBuV) – Limits (dBuV)

| | | | |
|--------------------------|---------------|----------------------|-------|
| Model No. | SC5000M PRIME | Test Mode | USB2 |
| Environmental Conditions | 21 , 69% RH | Resolution Bandwidth | 9 kHz |
| Tested by | Weici Lo | | |

Neutral

(The chart below shows the highest readings taken from the final data.)

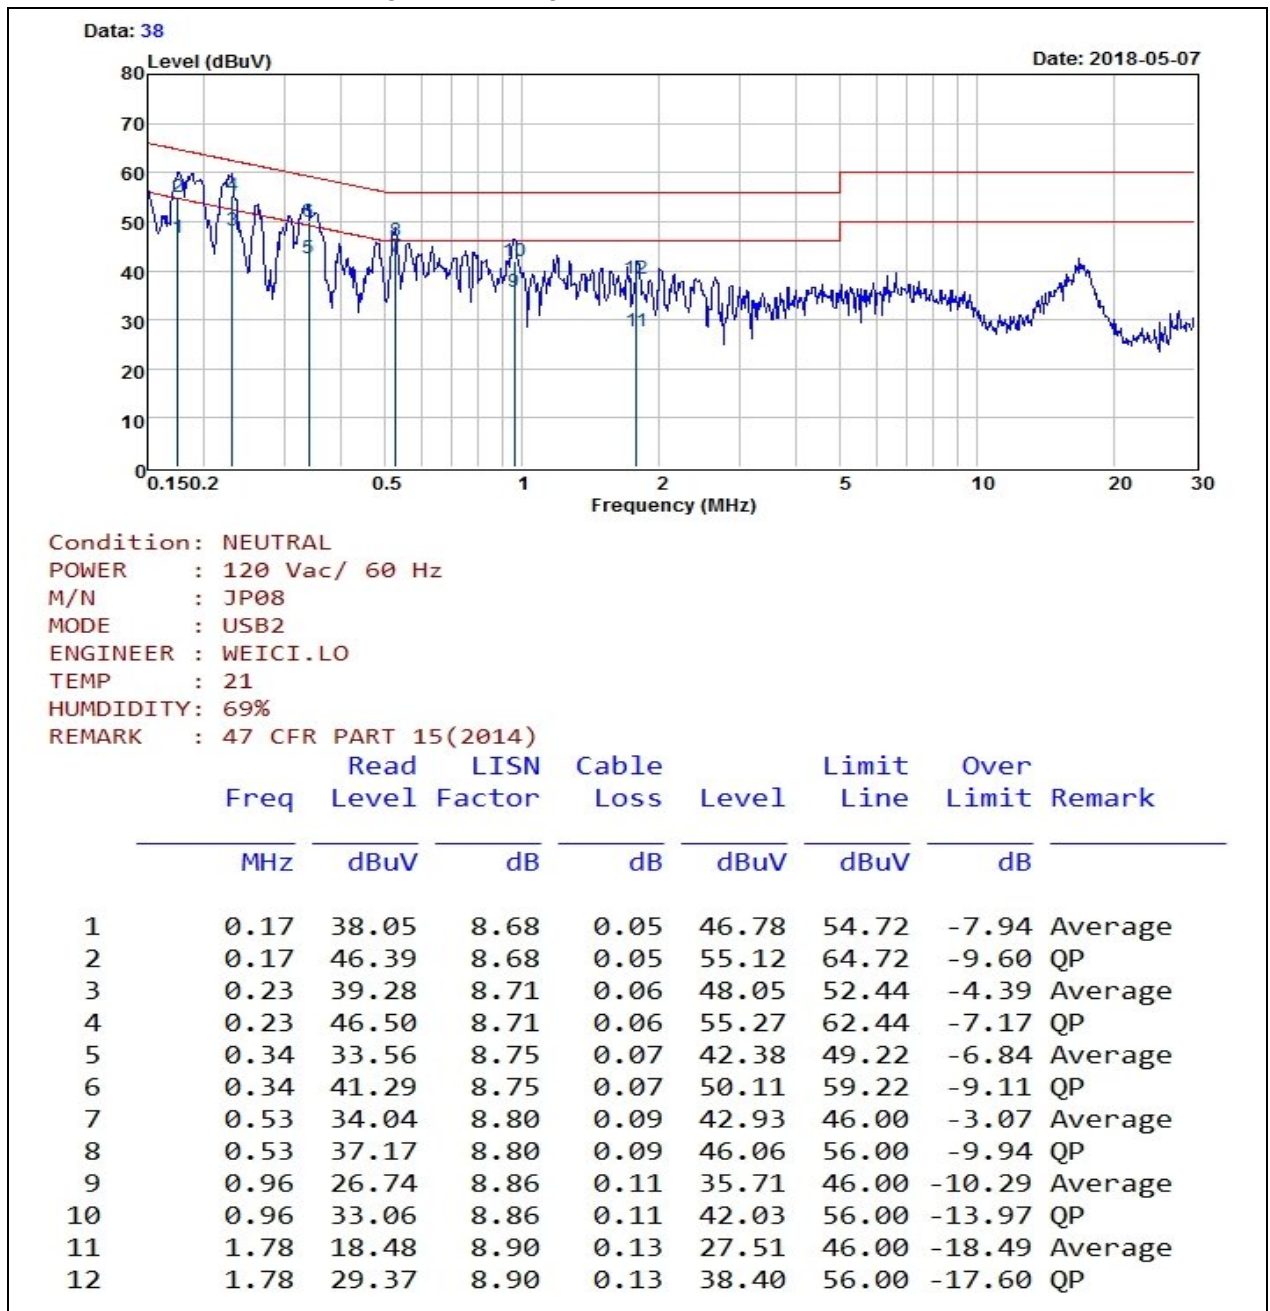

NOTE:

1. Measured Level (dBuV) = LISN Factor (dB) + Cable Loss (dB)+ Meter Reading (dBuV)
2. Over Limit (dBuV) = Measured Level (dBuV) – Limits (dBuV)

9. ANTENNA REQUIREMENT

9.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

9.2 ANTENNA CONNECTED CONSTRUCTION

Type: PCB Antenna
Model: WLA-EM-1508-0008-B
Manufacturer: BRITO
Gain: 4.6 dBi