



TEST REPORT

APPLICANT : Realme Chongqing Mobile
Telecommunications Corp., Ltd.

PRODUCT NAME : Mobile Phone

MODEL NAME : RMX3363

BRAND NAME : realme

FCC ID : 2AUYFRMX3363

STANDARD(S) : FCC 47 CFR Part 2(2.1093)
IEEE 1528-2013

RECEIPT DATE : 2021-05-19

TEST DATE : 2021-05-27 to 2021-07-15

ISSUE DATE : 2021-07-23

Edited by : Liang Yumei
Liang Yumei (Rapporteur)

Approved by: Shen Junsheng
Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





DIRECTORY

1. SAR Results Summary	5
2. Technical Information	7
2.1. Applicant and Manufacturer Information	7
2.2. Equipment under Test (EUT) Description	7
2.3. Environment of Test Site/Conditions	9
3. Specific Absorption Rate (SAR)	10
3.1. Introduction	10
3.2. SAR Definition	10
4. RF Exposure Limits	11
4.1. Uncontrolled Environment	11
4.2. Controlled Environment	11
5. Applied Reference Documents	12
6. SAR Measurement System	13
6.1. E-Field Probe	14
6.2. Data Acquisition Electronics (DAE)	15
6.3. Robot	15
6.4. Measurement Server	16
6.5. Light Beam Unit	16
6.6. Phantom	16
6.7. Device Holder	17
6.8. Data Storage and Evaluation	18
6.9. Test Equipment List	20
7. Tissue Simulating Liquids	22
8. SAR System Verification	24
8.1. Purpose of System Performance check	24
8.2. System Setup	24



8.3. Validation Results	25
9. EUT Testing Position	28
9.1. Handset Reference Points	28
9.2. Positioning for Cheek / Touch	29
9.3. Positioning for Ear / 15° Tilt	30
9.4. SAR Evaluation near the Mouth/Jaw Regions of the Phantom	30
9.5. Body-worn Configurations	31
9.6. Hotspot Mode Exposure Position Conditions	31
10. Measurement Procedures	32
10.1. Spatial Peak SAR Evaluation	32
10.2. Power Reference Measurement	33
10.3. Area Scan Procedures	33
10.4. Zoom Scan Procedures	33
10.5. SAR Averaged Methods	34
10.6. Power Drift Monitoring	34
11. SAR Test Procedure	35
11.1. General Scan Requirements	35
11.2. Test Procedure	36
11.3. Description of Interpolation/Extrapolation Scheme	36
11.4. Wireless Router	36
12. SAR Test Configuration	38
13. Conducted Power List	50
14. LTE Carrier Aggregation	50
14.1. LTE Uplink Carrier Aggregation	50
14.2. LTE Downlink Carrier Aggregation	51
15. 5G NR EN-DC Consideration	53
16. Hotspot Mode Evaluation Procedure	55
17. Block Diagram of the Tests to be Performed	57



17.1. Head	57
17.2. Body	58
18. Test Results List	59
18.1. Test Guidance	59
18.2. Head SAR Data	61
18.3. Body SAR Data	79
18.4. Repeated SAR Assessment	97
18.5. Extremity SAR Assessment	99
19. Simultaneous Transmission Evaluation	100
19.1. Simultaneous Transmission Consideration	100
19.2. SPLSR Assessment and Analysis	102
20. Uncertainty Assessment	103
Annex A General Information	106
Annex B Test Setup Photos	
Annex C Plots of System Performance Check	
Annex D Plots of Maximum SAR Test Results	
Annex E Conducted Power	
Annex F Simultaneous Transmission Exposure	
Annex G DASY Calibration Certificate	

Changed History		
Version	Date	Reason for Change
1.0	2021-07-23	First edition

1. SAR Results Summary

The maximum results of Specific Absorption Rate (SAR) found during test as bellows:

<Highest Reported SAR Summary>

Frequency Band		Highest SAR Summary			
		Head (Gap 0mm)	Body-worn (Gap 10mm)	Hotspot (Gap 10mm)	Extremity (Gap 0mm)
		1g SAR (W/kg)			10g SAR (W/kg)
GSM	GSM850	0.568	0.502	0.502	N/A
	GSM1900	0.352	0.373	0.569	N/A
WCDMA	WCDMA Band II	0.985	0.721	1.098	N/A
	WCDMA Band IV	0.974	0.767	1.169	N/A
	WCDMA Band V	0.888	0.297	0.297	N/A
LTE	LTE Band 2	1.193	0.736	1.198	N/A
	LTE Band 4	1.014	0.743	1.192	N/A
	LTE Band 5	1.104	0.330	0.330	N/A
	LTE Band 7	1.005	0.942	1.106	N/A
	LTE Band 12/17	0.563	0.154	0.237	N/A
	LTE Band 26	1.046	0.294	0.294	N/A
	LTE Band 38	1.080	0.570	0.706	N/A
	LTE Band 41	1.080	0.405	0.553	N/A
	LTE Band 66	0.772	0.751	1.079	N/A
5G NR	5G NR n5	0.721	0.316	0.316	N/A
	5G NR n7	1.077	1.045	1.151	N/A
	5G NR n38	0.902	1.070	1.070	N/A
	5G NR n41	1.178	0.956	1.094	N/A
	5G NR n66	0.927	0.768	1.090	N/A
WLAN	2.4GHz WLAN	0.976	0.112	0.112	N/A
	5GHz WLAN	1.096	1.008	1.008	1.295
2.4GHz Band	Bluetooth	N/A	0.045	0.045	N/A

Max Scaled SAR _{1g} (W/Kg):	Head:	1.193 W/kg	Limit(W/kg): 1.6 W/kg
	Body-worn:	1.070 W/kg	
	Hotspot:	1.198 W/kg	
Max Scaled SAR _{10g} (W/Kg):	Extremity:	1.295 W/kg	Limit(W/kg): 4.0 W/kg



Highest Simultaneous Transmission SAR _{1g} (W/Kg):	1.589 W/kg	Limit(W/kg): 1.6 W/kg
--	------------	-----------------------

Note:

1. This device is in compliance with Specific Absorption Rate (SAR) for general population or uncontrolled exposure limits (1.6W/kg as averaged over any 1 gram of tissue; specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992), and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.
2. For FDD-LTE Band 17 is full covered by FDD-LTE Band 12, therefore only FDD-LTE Band 12 was tested.
3. When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% risk level.



2. Technical Information

Note: Provide by applicant.

2.1. Applicant and Manufacturer Information

Applicant:	Realme Chongqing Mobile Telecommunications Corp., Ltd.
Applicant Address:	No.178 Yulong Avenue, Yufengshan, Yubei District, Chongqing,China
Manufacturer:	Realme Chongqing Mobile Telecommunications Corp., Ltd.
Manufacturer Address:	No.178 Yulong Avenue, Yufengshan, Yubei District, Chongqing,China

2.2. Equipment under Test (EUT) Description

Product Name:	Mobile Phone
IMEI:	863094050040970 / 01 863094050040962 / 01
Hardware Version:	11
Software Version:	realme UI V2.0
Frequency Bands:	GSM 850: 824 MHz ~ 849 MHz GSM 1900: 1850 MHz ~ 1910 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 66: 1710 MHz ~ 1780 MHz 5G NR n5: 824 MHz ~ 849 MHz 5G NR n7: 2500 MHz ~ 2570 MHz 5G NR n38: 2570 MHz ~ 2620 MHz 5G NR n41: 2496 MHz ~ 2690 MHz



	5G NR n66: 1710 MHz ~ 1780 MHz WLAN 2.4GHz: 2412 MHz ~ 2462 MHz WLAN 5.2GHz: 5180 MHz ~ 5240 MHz WLAN 5.3GHz: 5260 MHz ~ 5320 MHz WLAN 5.5GHz: 5500 MHz ~ 5700 MHz WLAN 5.8GHz: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC: 13.56MHz	
Modulation Mode:	GSM/GPRS: GMSK EDGE: 8PSK WCDMA: QPSK, 16QAM LTE: QPSK, 16QAM, 64QAM 5G NR: DFT-s-OFDM/CP-OFDM, PI/2 BPSK QPSK, 16QAM, 64QAM, 256QAM 802.11b: DSSS 802.11g/n-HT20/40: OFDM 802.11a/ac-VHT20/40/80/160: OFDM 802.11ax-HEW20/40/80/160: OFDMA Bluetooth: GFSK, π /4-DQPSK, 8-DPSK NFC: ASK	
Multi-slot Class:	GPRS: Multi-slot Class 12 EDGE: Multi-slot Class 12	
Operation Class:	Class B	
Carrier Aggregation:	CA Uplink & Downlink	
VoLTE Mode:	Support	
Hotspot Mode:	Support (5G WLAN only for Band 4)	
WLAN MIMO:	Support	
Antenna Type:	WWAN: Fixed Internal Antenna WLAN: PIFA Antenna Bluetooth: PIFA Antenna NFC: FPC Antenna	
SIM Cards Description:	SIM 1	GSM+WCDMA+LTE+NR
	SIM 2	GSM+WCDMA+LTE+NR
	For dual SIM card version, both SIM 1 and SIM 2 share the same chipset unit and tested as a single chipset, the SIM 1 was selected for testing.	

Note: For more detailed description, please refer to specification or user manual supplied by the applicant and/or manufacturer.



2.3. Environment of Test Site/Conditions

Normal Temperature (NT):	20-25 °C
Relative Humidity:	30-75 %
Air Pressure:	980-1020 hPa

Test Frequency:	GSM 850MHz/1900MHz WCDMA Band II/IV/V FDD-LTE Band 2/4/5/7/12/17/26/66 TDD-LTE Band 38/41 5G NR n5/n7/n38/n41/n66 WLAN 2.4GHz WLAN 5GHz
Operation Mode:	Call established
Power Level:	GSM 850 MHz (Maximum output power(level 5)) GSM 1900MHz (Maximum output power(level 0)) WCDMA Band II/IV/V (All Up Bits) FDD-LTE Band 2/4/5/7/12/17/26/66 (Maximum output power) TDD-LTE Band 38/41 (Maximum output power) 5G NR n5/n7/n38/n41/n66 (Maximum output power) WLAN 2.4GHz WLAN 5GHz

During SAR test, EUT is in Traffic Mode (Channel Allocated) at Normal Voltage Condition. A communication link is set up with a System Simulator (SS) by air link, and a call is established.

The EUT shall use its internal transmitter. The antenna(s), battery and accessories shall be those specified by the Factory. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. If a wireless link is used, the antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the handset.

The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the handset by at least 35 dB.

3. Specific Absorption Rate (SAR)

3.1. Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational or controlled and general population or uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational or controlled exposure limits are Middle than the limits for general population or uncontrolled.

3.2. SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by(dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density. (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg).

SAR measurement can be either related to the temperature elevation in tissue by,

$$SAR = C \left(\frac{\delta T}{\delta t} \right)$$

Where C is the specific head capacity, δT is the temperature rise and δt the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where σ is the conductivity of the tissue, ρ is the mass density of the tissue and |E| is the rmselectrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

4. RF Exposure Limits

4.1. Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

4.2. Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for General Population/Uncontrolled Exposure (W/kg)

Type Exposure	Uncontrolled Environment Limit
Spatial Peak SAR (1g cube tissue for head and trunk)	1.6 W/kg
Spatial Peak SAR (10g cube tissue for limbs)	4.0 W/kg
Spatial Peak SAR (1g cube tissue for whole body)	0.08 W/kg

Note:

1. Occupational/Uncontrolled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).
2. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

5. Applied Reference Documents

Leading reference documents for testing:

Identity	Document Title	Method Determination /Remark
FCC 47CFR Part 2(2.1093)	Radio Frequency Radiation Exposure Evaluation: Portable Devices	No deviation
IEEE 1528-2013	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques	No deviation
KDB 447498 D01v06	General RF Exposure Guidance	No deviation
KDB 248227 D01v02r02	SAR Measurement Procedures for 802.11 Transmitters	No deviation
KDB 865664 D01v01r04	SAR Measurement 100 MHz to 6 GHz	No deviation
KDB 865664 D02v01r02	RF Exposure Reporting	No deviation
KDB 648474 D04v01r03	Handset SAR	No deviation
KDB 941225 D01v03r01	3G SAR MEAUREMENT PROCEDURES	No deviation
KDB 941225 D05v02r05	SAR Evaluation Consideration for LTE Devices	No deviation
KDB 941225 D06v02r01	SAR Evaluation Procedures For Portable Devices With Wireless Router Capabilities	No deviation
Note 1: The test item is not applicable. Note 2: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.		

6. SAR Measurement System

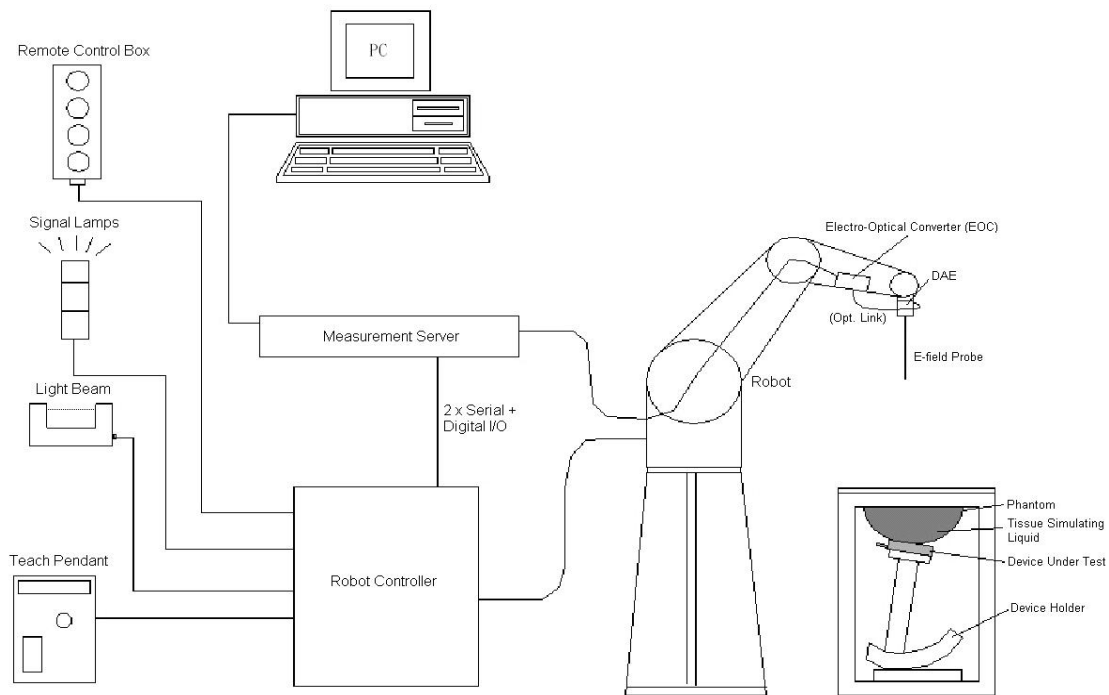


Fig 6.1 SPEAG DASY System Configurations

The DASY system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software.
- A data acquisition electronic (DAE) attached to the robot arm extension.
- A dosimetric probe equipped with an optical surface detector system.
- The electro-optical converter (ECO) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning.
- A computer operating Windows XP.
- DASY software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom.
- A device holder.
- Tissue simulating liquid.
- Dipole for evaluating the proper functioning of the system.
- Some of the components are described in details in the following sub-sections.

6.1. E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

➤ E-Field Probe Specification

<ES3DV3 Probe>

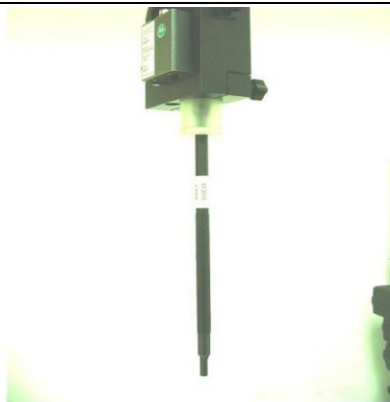
Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz to 3 GHz; Linearity: ± 0.2 dB	
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.4 dB in HSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g to 100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 330 mm (Tip: 16 mm) Tip diameter: 6.8 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.7 mm	

Fig 6.2 Photo of ES3DV3

<EX3DV4 Probe>

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz to 6 GHz; Linearity: ± 0.2 dB	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	10 μ W/g to 100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

Fig 6.3 Photo of EX3DV4

➤ E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

6.2. Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The input impedance of the DAE is 200M Ω ; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 6.4 Photo of DAE

6.3. Robot

The SPEAG DASY system uses the high precision robots (DASY4: RX90BL; DASY5: TX90XL) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY4: CS7MB; DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

High precision (repeatability ± 0.035 mm)

High reliability (industrial design)

Jerk-free straight movements

Low ELF interference (the closed metallic construction shields against motor control fields)



Fig 6.5 Photo of DASY5

6.4. Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY4: 166 MHz, Intel Pentium; DASY5: 400 MHz, Intel Celeron), chip disk (DASY4: 32 MB; DASY5: 128 MB), RAM (DASY4: 64 MB, DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board. The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



Fig 6.6 Photo of Server for DASY5

6.5. Light Beam Unit

The light beam switch allows automatic "tooling" of the probe. During the process, the actual position of the probe tip with respect to the robot arm is measured, as well as the probe length and the horizontal probe offset. The software then corrects all movements, such that the robot coordinates are valid for the probe tip.

The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.



Fig. 6.7 Photo of Light Beam

6.6. Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%) Center ear point: 6 ± 0.2 mm
Filling Volume	Approx. 25 liters
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet
Measurement Areas	Left Head, Right Head, Flat Phantom



Fig. 6.8 Photo of SAM Phantom

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

6.7. Device Holder

<Device Holder for SAM Twin Phantom>

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (EPR). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

<Laptop Extension Kit>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Fig 6.9 Device Holder

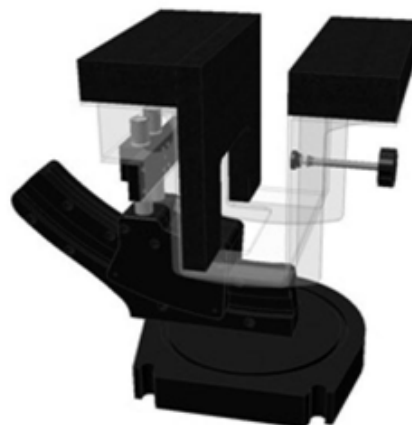


Fig 6.10 Laptop Extension Kit

6.8. Data Storage and Evaluation

➤ Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lose media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

➤ Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software.

Probe parameters:	- Sensitivity	$\text{Norm}_i, a_{i0}, a_{i1}, a_{i2}$
	- Conversion factor	ConvF_i
	- Diode compression point	dcpi
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the



exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \times \frac{cf}{dcp_i}$$

With V_i = compensated signal of channel i, (i = x, y, z)
 U_i = input signal of channel i, (i = x, y, z)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated:

$$\text{E-field Probes: } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \times \text{ConvF}}}$$

$$\text{H-field Probes: } H_i = \sqrt{V_i} \times \frac{a_{i0} + a_{i1} + a_{i2} f^2}{f}$$

With V_i = compensated signal of channel i, (i = x, y, z)
 Norm_i = sensor sensitivity of channel i, (i = x, y, z), $\mu\text{V}/(\text{V/m})^2$ for E-field
 Probes ConvF = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \times \frac{\sigma}{\rho \times 1000}$$

with SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm^3

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

6.9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1173	2018.06.21	2021.06.20
SPEAG	835MHz System Validation Kit	D835V2	4d227	2018.06.22	2021.06.21
SPEAG	1750MHz System Validation Kit	D1750V2	1160	2018.06.25	2021.06.24
SPEAG	1900MHz System Validation Kit	D1900V2	5d221	2018.06.22	2021.06.21
SPEAG	2450MHz System Validation Kit	D2450V2	805	2018.10.26	2021.10.25
SPEAG	2600MHz System Validation Kit	D2600V2	1139	2018.06.25	2021.06.24
SPEAG	5000MHz System Validation Kit	D5GHzV2	1176	2018.11.06	2021.11.05
SPEAG	DOSIMETRIC ASSESSMENT SYSTEM	DASY52	52.10.4.1527	NCR	NCR
SPEAG	Dosimetric E-Field Probe	EX3DV4	3823	2021.01.22	2022.01.21
SPEAG	Dosimetric E-Field Probe	EX3DV4	7608	2020.11.27	2021.11.26
SPEAG	Data Acquisition Electronics	DAE4	540	2020.12.11	2021.12.10
SPEAG	Dielectric Assessment KIT	DAK-3.5	1279	2020.10.20	2021.10.19
SPEAG	SAM Phantom 2	QD 000 P40 CB	TP-1464	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
R&S	Network Emulator	CMW500	165755	2021.02.25	2022.02.24
Agilent	Network Analyzer	E5071B	MY42404762	2021.03.29	2022.03.28
mini-circuits	Amplifier	ZHL-42W+	608501717	NCR	NCR
mini-circuits	Amplifier	ZVE-8G+	754401735	NCR	NCR
Agilent	Signal Generator	N5182B	MY53050509	2021.03.25	2022.03.24
Agilent	Power Sensor	N8482A	MY41090849	2020.10.19	2021.10.18
Agilent	Power Meter	E4416A	MY45102093	2020.10.19	2021.10.18
Anritsu	Power Sensor	MA2411B	N/A	2020.10.19	2021.10.18
Anritsu	Power Meter	NRVD	101066	2020.10.19	2021.10.18
Agilent	Dual Directional Coupler	778D	50422	NA	NA
MCL	Attenuation1	351-218-010	N/A	NA	NA
KTJ	Thermo meter	TA298	N/A	2021.01.15	2022.01.14
N/A	Tissue Simulating Liquids	700-6000MHz	N/A	24H	

Note:

1. The calibration certificate of DASY can be referred to annex G of this report.
2. The Insertion Loss calibration of Dual Directional Coupler and Attenuator were characterized via the network analyzer and compensated during system check.



3. The dielectric probe kit was calibrated via the network analyzer, with the specified procedure (calibrated in pure water) and calibration kit (standard) short circuit, before the dielectric measurement. The specific procedure and calibration kit are provided by Speag.
4. In system check we need to monitor the level on the power meter, and adjust the power amplifier level to have precise power level to the dipole; the measured SAR will be normalized to 1W input power according to the ratio of 1W to the input power to the dipole. For system check, the calibration of the power amplifier is deemed not critically required for correct measurement; the power meter is critical and we do have calibration for it.
5. Attenuator insertion loss is calibrated by the network Analyzer, which the calibration is valid, before system check.
6. N.C.R means No Calibration Requirement.

7. Tissue Simulating Liquids

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15cm, which is shown in Fig. 7.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 7.2. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in below table.

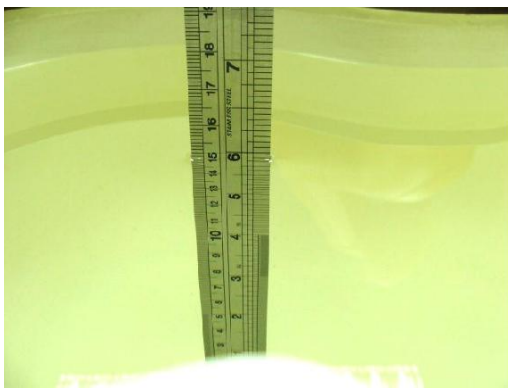


Fig 7.1 Photo of Liquid Height for Head SAR



Fig 7.2 Photo of Liquid Height for Body SAR

The following table gives the recipes for tissue simulating liquids

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800,1900,2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800,1900,2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG.

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%



Note: Please refer to the validation results for dielectric parameters of each frequency band.
The dielectric properties of the tissue simulating liquids were verified prior to the SAR evaluation using a SPEAG Dielectric Assessment KIT and an Agilent Network Analyzer.

Table 1: Dielectric Performance of Tissue Simulating Liquid

Frequency (MHz)	Tissue Type	Liquid Temp.(°C)	Conductivity (σ)	Conductivity Target (σ)	Delta (σ) (%)	Limit (%)	Date
750	HSL	22.1	0.889	0.89	-0.11	±5	2021.05.27
835	HSL	22.1	0.913	0.90	1.44	±5	2021.06.03
1750	HSL	22.2	1.352	1.37	-1.31	±5	2021.06.10
1900	HSL	22.1	1.379	1.40	-1.50	±5	2021.06.15
2450	HSL	22.3	1.826	1.80	1.44	±5	2021.06.19
2600	HSL	22.1	1.972	1.96	0.61	±5	2021.06.22
5250	HSL	22.2	3.122	3.05	2.36	±5	2021.06.24
5250	HSL	22.3	3.162	3.05	3.67	±5	2021.07.09
5250	HSL	22.4	3.133	3.05	2.72	±5	2021.07.15
5600	HSL	22.2	5.232	5.07	3.20	±5	2021.06.25
5600	HSL	22.2	5.176	5.07	2.09	±5	2021.07.07
5750	HSL	22.1	3.351	3.34	0.33	±5	2021.06.28
5750	HSL	22.2	3.426	3.34	2.57	±5	2021.07.06
Frequency (MHz)	Tissue Type	Liquid Temp.(°C)	Permittivity (ϵ_r)	Permittivity Target (ϵ_r)	Delta (ϵ_r) (%)	Limit (%)	Date
750	HSL	22.1	41.781	41.90	-0.28	±5	2021.05.27
835	HSL	22.1	42.351	41.50	2.05	±5	2021.06.03
1750	HSL	22.2	39.623	40.10	-1.19	±5	2021.06.10
1900	HSL	22.1	39.776	40.00	-0.56	±5	2021.06.15
2450	HSL	22.3	38.882	39.20	-0.81	±5	2021.06.19
2600	HSL	22.1	38.945	39.00	-0.14	±5	2021.06.22
5250	HSL	22.2	37.241	37.70	-1.22	±5	2021.06.24
5250	HSL	22.3	37.332	37.70	-0.98	±5	2021.07.09
5250	HSL	22.4	36.978	37.70	-1.92	±5	2021.07.15
5600	HSL	22.2	35.224	35.50	-0.78	±5	2021.06.25
5600	HSL	22.2	35.826	35.50	0.92	±5	2021.07.07
5750	HSL	22.1	36.873	37.00	-0.34	±5	2021.06.28
5750	HSL	22.2	37.122	37.00	0.33	±5	2021.07.06

8. SAR System Verification

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

8.1. Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

8.2. System Setup

The output power on dipole port must be calibrated to 24 dBm (250 mW) before dipole is connected. In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The system check verifies that the system operates within its specifications. It is performed daily or before every SAR measurement. The system check uses normal SAR measurements in the flat section of the phantom with a matched dipole at a specified distance. The system verification setup is shown as below.



Fig 8.1 Photo of Dipole Setup

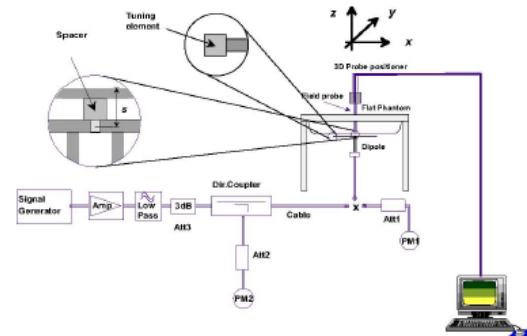


Fig 8.2 System Setup for System Evaluation

8.3. Validation Results

After system check testing, the SAR result will be normalized to 1W forward input power and compared with the reference SAR value derived from validation dipole certificate report. The deviation of system check should be within 10%.

<Validation Setup>

Frequency (MHz)	Tissue Type	Input Power(mW)	Dipole S/N	Probe S/N	DAE S/N
750	HSL	250	D750V3-1173	7608	540
835	HSL	250	D835V2-4d227	3823	540
1750	HSL	250	D1750V2-1160	3823	540
1900	HSL	250	D1900V2_5d221	3823	540
2450	HSL	250	D2450V2-805	3823	540
2600	HSL	250	D2600V2-1139	3823	540
5250	HSL	100	D5GHzV2-1176-5250	3823	540
5600	HSL	100	D5GHzV2-1176-5600	3823	540
5750	HSL	100	D5GHzV2-1176-5750	3823	540

<System Validation>

Frequency (MHz)	Tissue Type	Conductivity (σ)	Permittivity (ϵ_r)	CW Signal Validation		
				Sensitivity	Probe Linearity	Probe Isotropy
750	HSL	0.851	42.43	PASS	PASS	PASS
835	HSL	0.898	41.88	PASS	PASS	PASS
1750	HSL	1.386	39.91	PASS	PASS	PASS
1800	HSL	1.449	41.26	PASS	PASS	PASS
1900	HSL	1.435	39.65	PASS	PASS	PASS
2000	HSL	1.451	39.42	PASS	PASS	PASS
2300	HSL	1.764	38.99	PASS	PASS	PASS
2450	HSL	1.863	38.85	PASS	PASS	PASS
2600	HSL	1.973	38.58	PASS	PASS	PASS
5250	HSL	4.528	35.32	PASS	PASS	PASS
5600	HSL	4.905	34.89	PASS	PASS	PASS
5750	HSL	5.077	34.28	PASS	PASS	PASS



Frequency (MHz)	Tissue Type	Conductivity (σ)	Permittivity (ϵ_r)	Modulation Signal Validation		
				Mod. Type	Duty Factor	PAR
750	HSL	0.851	42.43	N/A	N/A	N/A
835	HSL	0.898	41.88	GMSK	PASS	N/A
1750	HSL	1.386	39.91	N/A	N/A	N/A
1800	HSL	1.449	41.26	N/A	N/A	N/A
1900	HSL	1.435	39.65	GMSK	PASS	N/A
2000	HSL	1.451	39.42	GMSK	PASS	N/A
2300	HSL	1.764	38.99	OFDM	PASS	PASS
2450	HSL	1.863	38.85	OFDM	PASS	PASS
2600	HSL	1.973	38.58	TDD	PASS	N/A
5250	HSL	4.528	35.32	OFDM	N/A	PASS
5600	HSL	4.905	34.89	OFDM	N/A	PASS
5750	HSL	5.077	34.28	OFDM	N/A	PASS

<Validation Results>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2021.05.27	750	HSL	250	2.10	8.26	8.4	1.69
2021.06.03	835	HSL	250	2.35	9.34	9.4	0.64
2021.06.10	1750	HSL	250	9.33	37.10	37.32	0.59
2021.06.15	1900	HSL	250	10.02	39.50	40.08	1.47
2021.06.19	2450	HSL	250	13.21	52.00	52.84	1.62
2021.06.22	2600	HSL	250	13.78	54.00	55.12	2.07
2021.06.24	5250	HSL	100	8.02	78.90	80.2	1.65
2021.07.09	5250	HSL	100	8.20	78.90	82	3.93
2021.07.15	5250	HSL	100	8.27	78.90	82.7	4.82
2021.06.25	5600	HSL	100	8.11	80.90	81.1	0.25
2021.07.07	5600	HSL	100	8.34	80.90	83.4	3.09
2021.06.28	5750	HSL	100	8.21	80.00	82.1	2.63
2021.07.06	5750	HSL	100	8.29	80.00	82.9	3.62



REPORT No. : SZ21040341S01

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2021.05.27	750	HSL	250	1.38	5.45	5.52	1.28
2021.06.03	835	HSL	250	1.53	6.07	6.12	0.82
2021.06.10	1750	HSL	250	5.13	20.00	20.52	2.60
2021.06.15	1900	HSL	250	5.21	20.60	20.84	1.17
2021.06.19	2450	HSL	250	6.08	24.10	24.32	0.91
2021.06.22	2600	HSL	250	6.32	24.50	25.28	3.18
2021.06.24	5250	HSL	100	2.31	22.50	23.1	2.67
2021.07.09	5250	HSL	100	2.26	22.50	22.6	0.44
2021.07.15	5250	HSL	100	2.27	22.50	22.7	0.89
2021.06.25	5600	HSL	100	2.36	23.10	23.6	2.16
2021.07.07	5600	HSL	100	2.28	23.10	22.8	-1.30
2021.06.28	5750	HSL	100	2.28	22.60	22.8	0.88
2021.07.06	5750	HSL	100	2.36	22.60	23.6	4.42

Note: System checks the specific test data please see Annex C.

9. EUT Testing Position

This EUT was tested in six different positions. They are right cheek/right tilted/left cheek/left tilted for head, Front/Back of the EUT with phantom 10 mm gap, as illustrated below, please refer to Appendix B for the test setup photos.

9.1. Handset Reference Points

The vertical centre line passes through two points on the front side of the handset – the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.

The horizontal line is perpendicular to the vertical centre line and passes the center of the acoustic output. The horizontal line is also tangential to the handset at point A.

The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line.

Also note that the vertical centre line is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.



Fig. 9.1 Illustration for Cheek Position

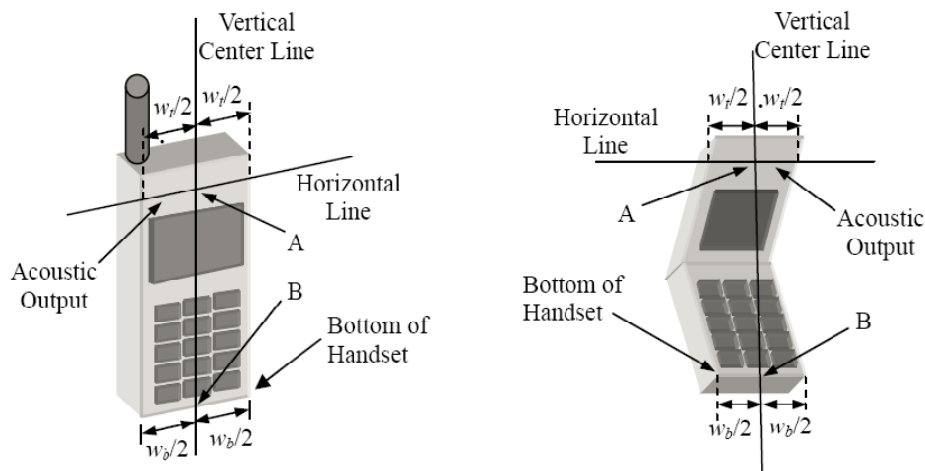


Fig. 9.2 Illustration for Handset Vertical and Horizontal Reference Lines

9.2. Positioning for Cheek / Touch

To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear and LE: Left Ear) and align the center of the ear piece with the line RE-LE.

To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see below figure)

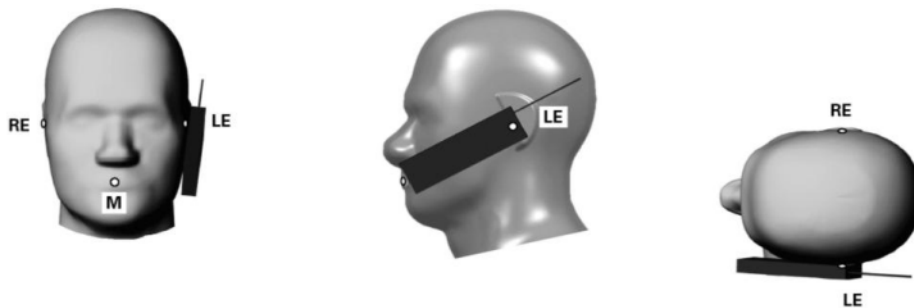


Fig 9.3 Illustration for Cheek Position

9.3. Positioning for Ear / 15° Tilt

To position the device in the “cheek” position described above.

While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see figure below).

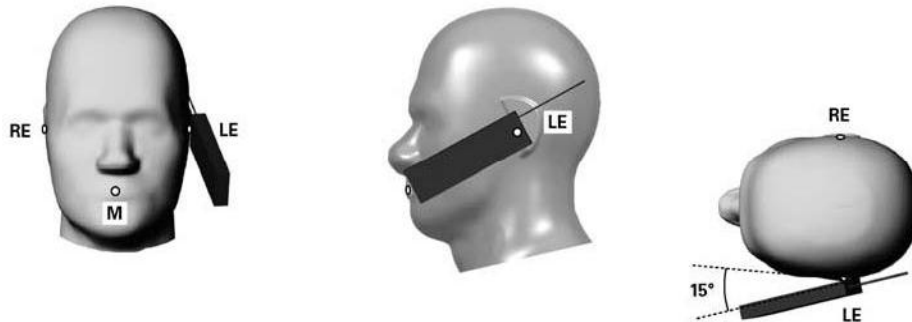


Fig 9.4 Illustration for Tilted Position

9.4. SAR Evaluation near the Mouth/Jaw Regions of the Phantom

Antennas located near the bottom of a phone may require SAR measurements around the mouth and jaw regions of the SAM head phantom. This typically applies to clam-shell style phones that are generally longer in the unfolded normal use positions or to certain older style long rectangular phones.

Under these circumstances, the following procedures apply, adopted from the FCC guidance on SAR handsets document FCC KDB Publication 648474 D04v01r03. The SAR required in these regions of SAM should be measured using a flat phantom. The phone should be positioned with a separation distance of 4 mm between the ear reference point (ERP) and the outer surface of the flat phantom shell. While maintaining this distance at the ERP location, the low (bottom) edge of the phone should be lowered from the phantom to establish the same separation distance between the peak SAR locations identified by the truncated partial SAR distribution measured with the SAM phantom. The distance from the peak SAR location to the phone is determined by the straight line passing perpendicularly through the phantom surface. When it is not feasible to maintain 4 mm separation at the ERP while also establishing the required separation at the peak SAR location, the top edge of the phone will be allowed to touch the phantom with a separation < 4 mm at the ERP. The phone should not be tilted to the left or right while placed in this inclined position to the flat phantom.

9.5. Body-worn Configurations

The body-worn configurations shall be tested with the supplied accessories (belt-clips, holsters, etc.) attached to the device in normal use configuration.

For body-worn and other configurations a flat phantom shall be used which is comprised of material with electrical properties similar to the corresponding tissues.

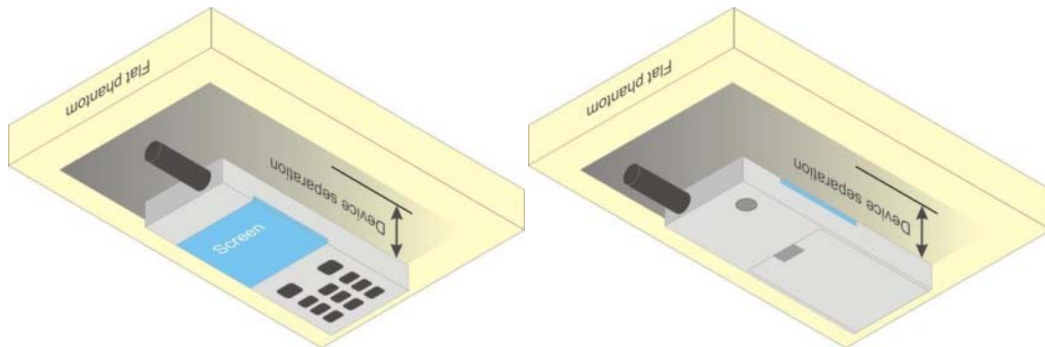


Fig 9.5 Illustration for Body Worn Position

9.6. Hotspot Mode Exposure Position Conditions

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing functions, the relevant hand and body exposure conditions are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surfaces and edges with a transmitting antenna located within 25 mm from that surface or edge. When the form factor of a handset is smaller than 9 cm x 5 cm, a test separation distance of 5 mm (instead of 10 mm) is required for testing hotspot mode. When the separation distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

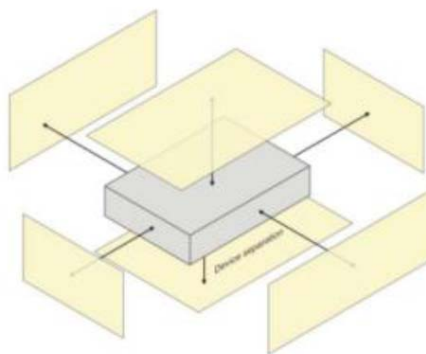


Fig 9.6 Illustration for Hotspot Position

10. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band.
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power.

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band.
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement.
- (b) Area scan.
- (c) Zoom scan.
- (d) Power drift measurement.

10.1. Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.



The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan.
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters).
- (c) Generation of a high-resolution mesh within the measured volume.
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid.
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface.
- (f) Calculation of the averaged SAR within masses of 1g and 10g.

10.2. Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

10.3. Area Scan Procedures

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 10mm^2 step integral, with 1mm interpolation used to locate the peak SAR area used for zoom scan assessments.

When an Area Scan has measured all reachable points, it computes the field maxima founding the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE1528-2003.

10.4. Zoom Scan Procedures

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. A density of 1000 kg/m^3 is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1g cube is 10mm, with the side



length of the 10 g cube 21,5mm. The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications utilize a physical step of 5x5x7 (8mmx8mmx5mm) providing a volume of 32mm in the X & Y axis, and 30mm in the Z axis.

10.5. SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Sheppard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

10.6. Power Drift Monitoring

All SAR testing is under the DUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of DUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

11. SAR Test Procedure

11.1. General Scan Requirements

Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std. 1528-2013.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 mm $\pm$ 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm $\pm$ 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^{\circ} \pm 1^{\circ}$	$20^{\circ} \pm 1^{\circ}$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$ mm	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

11.2. Test Procedure

The Following steps are used for each test position

1. Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface.
2. Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
3. Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
4. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

11.3. Description of Interpolation/Extrapolation Scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.

11.4. Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges,



determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

12. SAR Test Configuration

<GSM Mode>

A summary of these settings are illustrated below:

For GSM850 frequency band, the power control is set to 5 for GSM/GPRS mode (GSMK-CS1) and set to 8 for EDGE mode (MCS5); For GSM1900 frequency band, the power control is set to 0 for GSM/GPRS mode (GSMK-CS1) and set to 2 for EDGE mode (MCS5).

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes.

Timeslot consignations:

Remark:

1. The frame-averaged power is linearly reported the maximum burst averaged power over 8 time slots. The calculated method are shown as below:
The duty cycle "x" of different time slots as below:
1 TX slot is 1/8, 2 TX slots is 2/8, 3 TX slots is 3/8 and 4 TX slots is 4/8
Based on the calculation formula:
Frame-averaged power = Burst averaged power + 10 log (x)
So,
Frame-averaged power (1 TX slot) = Burst averaged power (1 TX slot)– 9.03
Frame-averaged power (2 TX slots) = Burst averaged power (2 TX slots)– 6.02
Frame-averaged power (3 TX slots) = Burst averaged power (3 TX slots)– 4.26
Frame-averaged power (4 TX slots) = Burst averaged power (4 TX slots) – 3.01
2. CS1 coding scheme was used in GPRS conducted power measurements and SAR testing, MCS5 coding scheme was used in EGPRS conducted power measurements and SAR testing (if necessary).

No. of Slots:	Slot 1	Slot 2	Slot 3	Slot 4
Slot Consignation:	1Up4Down	2Up3Down	3Up2Down	4Up1Down
Duty Cycle:	1:8.3	1:4.15	1:2.77	1:2.08
Correct Factor:	-9.03dB	-6.02dB	-4.26dB	-3.01dB

<WCDMA Mode>

Summary of UMTS conducted power measurement:

1. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.
2. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
3. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
4. For HSPA+ devices supporting 16 QAM in the uplink, power measurements procedure is according to the configurations in Table C.11.1.4 of 3GPP TS 34.121-1.
5. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA / HSPA+ is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA / HSPA+ to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA / HSPA+) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+.
6. A fixed level power reduction is applied for WCDMA Band II when handset open Hotspot mode, the power reduction triggered.

HSDPA Setup Configuration

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	CM (dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽³⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5
Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$ Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$. Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.						

HSUPA Setup Configuration

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

Note 6: β_{ed} cannot be set directly; it is set by Absolute Grant Value.

HSPA+ 3GPP release 7 (uplink category 7) 16QAM, Setup Configuration:

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_c (Note 3)	β_d	β_{hs} (Note 1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).

Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.

Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signaled to use the extrapolation algorithm.

DC-HSDPA Setup Configuration

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.

Table E.5.0: Levels for HSDPA connection setup


Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

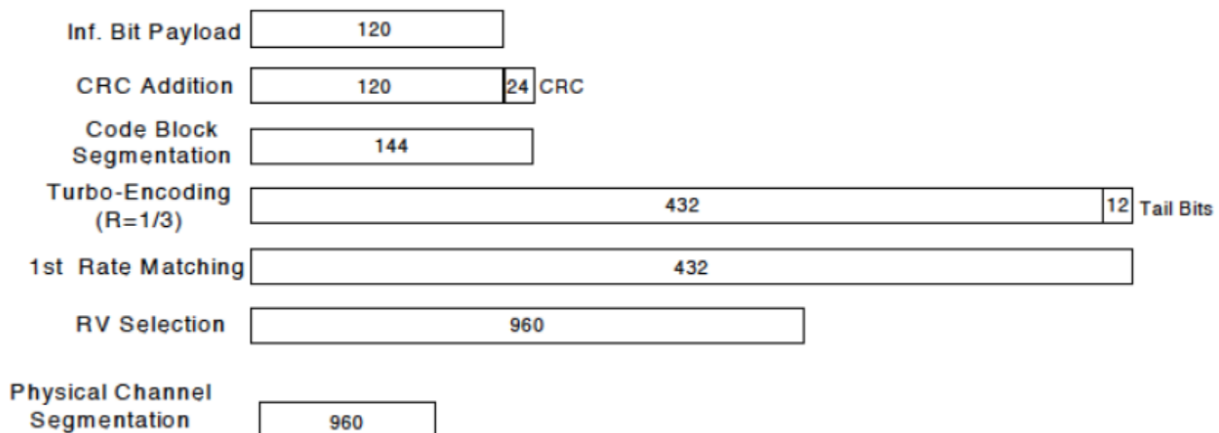
Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)



<CDMA Mode>

1xEV-DO Rev. B

Call box setup procedure

1xEV-DO Release B

1> CMW 500 Signal Generator > 1xEV-DO Taskbar Enable

2> CMW 500 1xEV-DO Signaling Configuration Window >

3> 1xEV-DO Signaling On Window:

Under Access Network Control:

Band Class: BC0: US Cellular

RF Channel: 31

1xEV-DO Power: -70 dBm

4> 1xEV-DO Signaling Configuration Window

Under RF Frequency Band / Channel: Enter Ch. Frequency

- Under Carrier Configuration: RF Frequency
For Two Carriers: Low Channel (1013)

	<u>RF Channel</u>	<u>RF Channel Offset</u>
Carrier [0]	31	0
Carrier [1]	1013	982

- Under Carrier Configuration: RF Pilot
- | | <u>Carrier Sector</u> | <u>Active on AN</u> | <u>Assigned to AT</u> |
|-----------|-----------------------|---------------------|-----------------------|
| Pilot [0] | C0/S0 | ✓ | ✓ |
| | CA/S1 | ✓ | ✓ |

For Three Carriers: Low Channel (1013)

	<u>RF Channel</u>	<u>RF Channel Offset</u>
Carrier [0]	72	0
Carrier [1]	31	-41
Carrier [2]	1013	941

- Under Carrier Configuration: RF Pilot
- | | <u>Carrier Sector</u> | <u>Active on AN</u> | <u>Assigned to AT</u> |
|-----------|-----------------------|---------------------|-----------------------|
| Pilot [0] | C0/S0 | ✓ | ✓ |
| Pilot [1] | C1/S1 | ✓ | ✓ |
| Pilot [2] | C2/S2 | ✓ | ✓ |



<LTE Mode>

LTE Target MPR level

The device implements maximum power reduction per 3GPP 36.101 requirements where the MPR target is as below table. The MPR settings are implemented configured into firmware and cannot be disabled by the end user or LTE carrier network.

Modulation	Channel bandwidth / Transmission bandwidth configuration [RB]						MPR	3GPP
	1.4	3.0	5	10	15	20	Target	MPR
	MHz	MHz	MHz	MHz	MHz	MHz	(dB)	(dB)
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	1	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	1	≤ 1
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	2	≤ 2

Note: The measurement result showed some difference from the target MPR level, due to expected 0.5dB measurement tolerance

LTE Bands

LTE Bands	Channel bandwidth / Transmission bandwidth configuration [RB]					
	1.4	3.0	5	10	15	20
	MHz	MHz	MHz	MHz	MHz	MHz
2	√	√	√	√	√	√
4	√	√	√	√	√	√
5	√	√	√	√	N/A	N/A
7	N/A	N/A	√	√	√	√
12	N/A	N/A	√	√	N/A	N/A
17	N/A	N/A	√	√	N/A	N/A
26	√	√	√	√	√	N/A
38	N/A	N/A	√	√	√	√
41	N/A	N/A	√	√	√	√
66	√	√	√	√	√	√

Note:

1. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
2. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
3. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
4. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the

highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

5. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
6. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ Db higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported band width is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
7. For LTE B4 / B5 / B7 / B17 the maximum bandwidth does not support three non-overlapping channels, per KDB941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
8. LTE band 2 / 17 SAR test was covered by Band 25 / 12; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. The maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion.
 - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.
9. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the CMW500 base station, therefore, the device 64QAM and 16QAM signal modulation are correct. Identify if Maximum Power Reduction (MPR) is optional or mandatory, i.e. built-in by design: only mandatory MPR may be considered during SAR testing, when the maximum output power is permanently limited by the MPR implemented within the UE; and only for the applicable RB (resource block) configurations specified in LTE standards: b) A-MPR (additional MPR) must be disabled.
10. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor



- d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - e. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
11. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is: ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
12. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
13. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.

<WLAN 2.4GHz>

1. SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:
 - a. When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
 - b. When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.
2. 2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test configuration Procedures should be followed.
3. For held-to-ear and hotspot operations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.



4. Justification for test configurations for WLAN per KDB Publication 248227 D02DR02-41929 for 2.4 GHz Wi-Fi single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR.
5. A fixed level power reduction is applied for WiFi when handset operates "held to the body" condition or "held to the ear" condition, the power reduction triggered by audio receiver detection and call establish status.
6. Per KDB 248227 D01v02r02, In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. SAR is not required for the following 2.4 GHz OFDM conditions:
 - a. When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
 - b. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

<WLAN 5GHz>

A) U-NII-1 and U-NII-2A Bands

For devices that operate in only one of the U-NII-1 and U-NII-2A bands, the normally required SAR procedures for OFDM configurations are applied. For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following:

1. When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, both bands are tested independently for SAR.
2. When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, both bands are tested independently for SAR.
3. The two U-NII bands may be aggregated to support a 160 MHz channel on channel number 50.
4. Without additional testing, the maximum output power for this is limited to the lower of the maximum output power certified for the two bands. When SAR measurement is required for at least one of the bands and the highest reported SAR adjusted by the ratio of specified maximum output power of aggregated to standalone band is > 1.2 W/kg, SAR is required for the 160 MHz channel. This procedure does not apply to an aggregated band with maximum output higher than the standalone band(s); the aggregated band must be tested independently for SAR. SAR is not required when the 160 MHz channel is operating at a reduced maximum power and also qualifies for SAR test exclusion.

B) U-NII-2C and U-NII-3 Bands

The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. when Terminal Doppler Weather Radar (TDWR) restriction applies, all channels that operate at 5.60 – 5.65 GHz must be included to apply the SAR test reduction and measurement procedures. When the same transmitter and antenna(s) are used for U-NII-2C band and U-NII-3 band or 5.8 GHz band of §15.247, the bands may be aggregated to enable additional channels with 20, 40 or 80 MHz bandwidth to span across the band gap, as illustrated in Appendix B. The maximum output power for the additional band gap channels is limited to the lower of those certified for the bands. Unless band gap channels are permanently disabled, they must be considered for SAR testing. The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. To maintain SAR measurement accuracy and to facilitate test reduction, the channels in U-NII-2C band above 5.65 GHz may be grouped with the 5.8 GHz channels in U-NII-3 or §15.247 band to enable two SAR probe calibration frequency points to cover the bands, including the band gap channels. When band gap channels are supported and the bands are not aggregated for SAR testing, band gap channels must be considered independently in each band according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

C) OFDM Transmission Mode SAR Test Configuration and Channel Selection Requirements

The initial test configuration for 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple configurations in a frequency band have the same specified maximum output power, the initial test configuration is determined according to the following steps applied sequentially.

1. The largest channel bandwidth configuration is selected among the multiple configurations with the same specified maximum output power.
2. If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.
3. If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.
4. When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is

chosen over 802.11n. After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following. These channel selection procedures apply to both the initial test configuration and subsequent test configuration(s), with respect to the default power measurement procedures or additional power measurements required for further SAR test reduction. The same procedures also apply to subsequent highest output power channel(s) selection.

5. The channel closest to mid-band frequency is selected for SAR measurement.
6. For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

D) SAR Test Requirements for OFDM configurations

When SAR measurement is required for 802.11 a/n/ac OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. When the same transmitter and antenna(s) are used for U-NII-1 and U-NII-2A bands, additional SAR test reduction applies. When band gap channels between U-NII-2C band and 5.8 GHz U-NII-3 or §15.247 band are supported, the highest maximum output power transmission mode configuration and maximum output power channel across the bands must be used to determine SAR test reduction, according to the initial test configuration and subsequent test configuration requirements. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

13. Conducted Power List

Remark: The output power of GSM/WCDMA/LTE/5G NR(SA) refers to the annex E of this report.

14. LTE Carrier Aggregation

14.1. LTE Uplink Carrier Aggregation

➤ Carrier Aggregation Configuration

<Intra-band>

2CC Uplink Carrier Aggregation for Intra-band				
No.	Combination	4X4 MIMO	Restriction	Completely Covered by Measurement Superset
1	CA_7C	7C	-	No
2	CA_38C	38C	-	No
3	CA_41C	41C	-	No

Note:

1. According to the 3GPP 36.101 table 6.2.2A-1 specifies that the aggregation maximum allowed output power is equivalent to the signal carrier scenario for intra-band contiguous carrier aggregation scenarios. When the non-contiguous RB allocation is applied the MPR shell complies with the table 6.2.3A defined in 3GPP 36.101.
2. According to the TCB Workshop publication, the output power of uplink CA would be measured with the wideband signal integration over the component carriers. And SAR measurement would be performed at the worst exposure condition of each band.
3. Additional SAR measurement for LTE UL CA with other DL CA combinations are not required when the maximum output power of this configuration is not $> 1/4$ dB higher than the maximum output power for UL CA active.
4. The output power of CA uplink refers to the annex E of this report.

14.2. LTE Downlink Carrier Aggregation

➤ Carrier Aggregation Configuration

For the device supports bands and bandwidths and configurations are provided as follow table was according to 3GPP.

2CC Downlink Carrier Aggregation				
No.	Combination	4X4 MIMO	Restriction	Completely Covered by Measurement Superset
1	CA_7B	7B	-	No
2	CA_7C	7C	-	3CC-10
3	CA_38C	38C	-	No
4	CA_41C	41C	-	No
5	CA_5A-40A	40A	-	No
6	CA_5A-41A	41A	-	No
7	CA_7A-7A	7A, 7A-7A	-	No
8	CA_41A-41A	41A	-	3CC-1
9	CA_4A-7A	4A, 7A	-	No
10	CA_66A-66A	-	-	4CC-2
11	CA_5A-66A	-	-	3CC-7
12	CA_4A-5A	4A	-	No
13	CA_5A-7A	7A	-	4CC-4
14	CA_7A-66A	-	-	4CC-2
15	CA_2A-5A	2A	-	No
16	CA_12A-66A	-	-	No

3CC Downlink Carrier Aggregation				
No.	Combination	4X4 MIMO	Restriction	Completely Covered by Measurement Superset
1	CA_41D	41D	-	4CC-1
2	CA_41A-41C	41A,41C	-	4CC-1
3	CA_41A-41A-41A	41A	-	4CC-1
4	CA_4A-7C	4A,7C	-	No
5	CA_5A-7C	7C	-	4CC-4
6	CA_7A-66A-66A	-	-	4CC-2
7	CA_5A-7A-66A	-	-	4CC-3
8	CA_2A-7C	-	-	No
9	CA_5A-7A-7A	7A	-	4CC-4
10	CA_7C-66A	-	-	4CC-4

4CC Downlink Carrier Aggregation				
No.	Combination	4X4 MIMO	Restriction	Completely Covered by Measurement Superset
1	CA_41A-41D	41A	-	No
2	CA_7C-66A-66A	-	-	No
3	CA_5A-7A-66A-66A	-	-	No
4	CA_5A-7C-66A	-	-	No

➤ LTE Downlink Carrier Aggregation Conducted Power

1. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
2. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
3. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
4. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
5. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
6. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy.
7. 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1 |BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

8. The output power of CA downlink refers to the annex E of this report.

15. 5G NR EN-DC Consideration

➤ General Guidance

1. It is only limited to operate at EN-DC (NSA) for 5G NR implementation According to the character of the device. SAR measurement should be performed separately for the limitations of the probe calculation factors.
2. When the EN-DC is active the output power of the LTE anchors is equal or less than the standalone carrier, therefore the LTE output power and SAR were estimated based on the standalone carrier to performed sim-TX analysis with 5G NR, WLAN and Bluetooth.
3. According to October 2020 TCB Workshop publication, EN-DC SAR assessment should follow:
 - a. If the signal uplink 1-g SAR values for each band are both less than 0.8 W/kg and the algebraic summation of the 1-g SAR values are less than 1.45 W/kg no additional measurements need to be performed.
 - b. If one or the signal uplink 1-g SAR values is greater than 0.8 W/kg, instead of algebraically summing the 1-g SAR values, sum up the SAR distributions, similar to the enlarged zoom scan (volume scan) procedures found in FCC KDB Publication 865664 D01. And PAG is required for this case.
 - c. If the algebraic sum of the 1-g SAR values is > 1.45 W/kg additional measurements may have to be made. Submit a KDB inquiry for additional guidance and PAG is required for this case.
 - d. When the algebraic sum of the 1-g SAR values is > 1.6 W/kg, SPLSR analysis procedure should be applied.

➤ 5G NR Anchor Combination

5G-NR	EN-DC Combination	LTE Uplink	5G-NR Uplink	SCS (kHz)	Maximum Bandwidth (MHz)
FDD	7A-n5	7A	n5	15	20
FDD	66A-n5	66A	n5	15	20
FDD	2A-n7	2A	n7	15	20
FDD	5A-n7	5A	n7	15	20
FDD	66A-n7	66A	n7	15	20
TDD	26A-n41	26A	n41	30	100



➤ **Maximum Power for EN-DC**

EN-DC Configuration	LTE Signal Carrier				5G NR		
	Band	BW (MHz)	Maximum Power(dBm)		Band	BW (MHz)	Maximum Power(dBm)
			Standalone	EN-DC Active			EN-DC Active
EN-DC_7A-n5	7	20	23.7	24.2	n5	20	24.7
EN-DC_66A-n5	66	20	24.3	24.2	n5	20	24.7
EN-DC_2A-n7	2	20	23.5	23.7	n7	20	23.7
EN-DC_5A-n7	5	10	24.5	23.7	n7	20	23.7
EN-DC_66A-n7	66	20	24.3	23.7	n7	20	23.7
EN-DC_26A-n41	26	20	24.0	24.2	n41	100	24.2

16. Hotspot Mode Evaluation Procedure

➤ EUT Antenna Location

The EUT antenna location in Annex B.
Antenna supports TX bands: ANT 0: GSM 850/1900, UMTS Band II/IV/V, LTE Band 2/4/5/7/12/17/26/38/41/66, 5G NR n2/5/7/38/41/66, DC_7A-n5A/DC_66A-n5A/DC_5A-n7A/DC_66A-n7A/DC_26A-n41A; ANT 1: GSM 850/1900, UMTS Band II/IV/V, LTE Band 2/4/5/7/12/17/26/38/41, 5G NR n2/5/7/38/41, DC_2A-n7A/DC_5A-n7A/DC_26A-n41A; ANT 2: DC_7A-n5A/DC_66A-n5A/DC_2A-n7A; ANT 4: LTE Band 66, 5G NR n66, DC_66A-n7A; ANT 6: WLAN 2.4GHz CH0, WLAN 5GHz CH0, Bluetooth; ANT 7: WLAN 2.4GHz CH1, WLAN 5GHz CH1, Bluetooth;

➤ EUT Antenna Distance

Antenna Location	Front	Back	Left	Right	Top	Bottom
ANT 0 Antenna	<5mm	<5mm	<5mm	<5mm	>25mm	<5mm
ANT 1 Antenna	<5mm	<5mm	<5mm	>25mm	<5mm	>25mm
ANT 2 Antenna	<5mm	<5mm	>25mm	<5mm	<25mm	>25mm
ANT 4 Antenna	<5mm	<5mm	<5mm	>25mm	<25mm	>25mm
ANT 6 Antenna	<5mm	<5mm	>25mm	<5mm	<5mm	>25mm
ANT 7 Antenna	<5mm	<5mm	<5mm	>25mm	<5mm	>25mm

➤ Hotspot Evaluation

Assessment	Hotspot side for SAR Test distance: 10mm					
Antennas	Front	Back	Left	Right	Top	Bottom
ANT 0	Yes	Yes	Yes	Yes	No	Yes
ANT 1	Yes	Yes	Yes	No	Yes	No
ANT 2	Yes	Yes	No	Yes	Yes	No
ANT 4	Yes	Yes	Yes	No	Yes	No
ANT 6	Yes	Yes	No	Yes	Yes	No
ANT 7	Yes	Yes	Yes	No	Yes	No

Note :

1. The SAR evaluation procedures for Portable Devices with Wireless Router function is according to KDB 941225 D06 Hotspot SAR v02r01.
2. Head/Body-worn/Hotspot mode SAR assessments are required.
3. Referring to KDB 941225 D06, when the overall device length and width are $\geq 9\text{cm} \times 5\text{cm}$, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.




REPORT No. : SZ21040341S01

4. For WWAN antennas, all of the surfaces or edges will be tested except the bottom side though they are greater than 25mm between the antennas and surfaces or edges in this report.

17. Block Diagram of the Tests to be Performed

17.1. Head

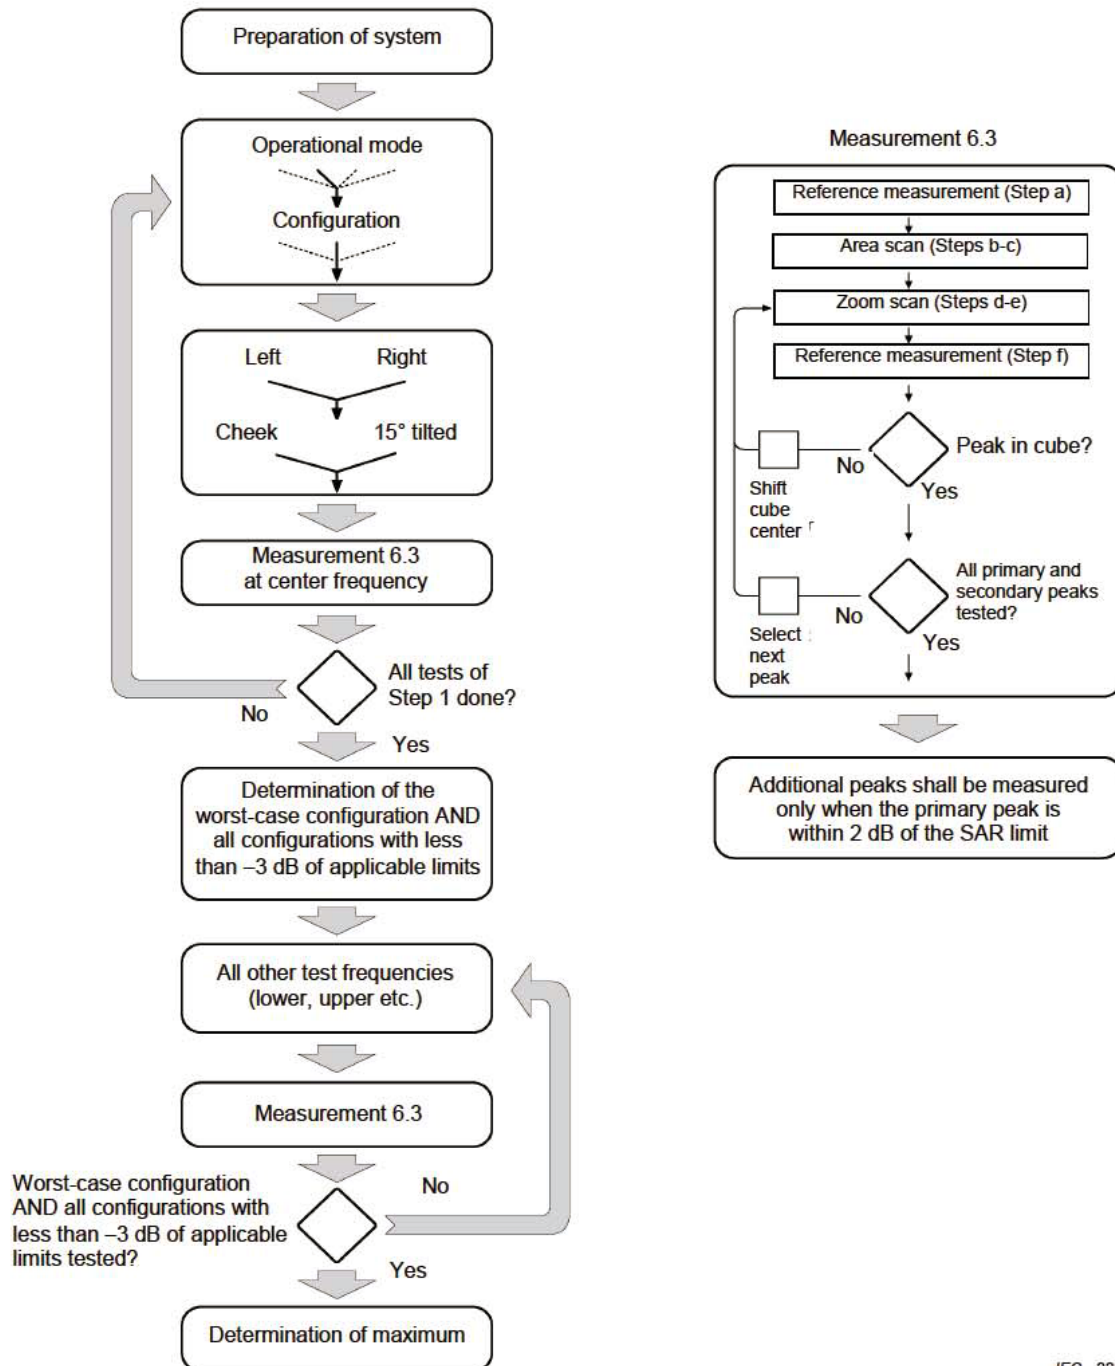

IEC 228/05

17.2. Body

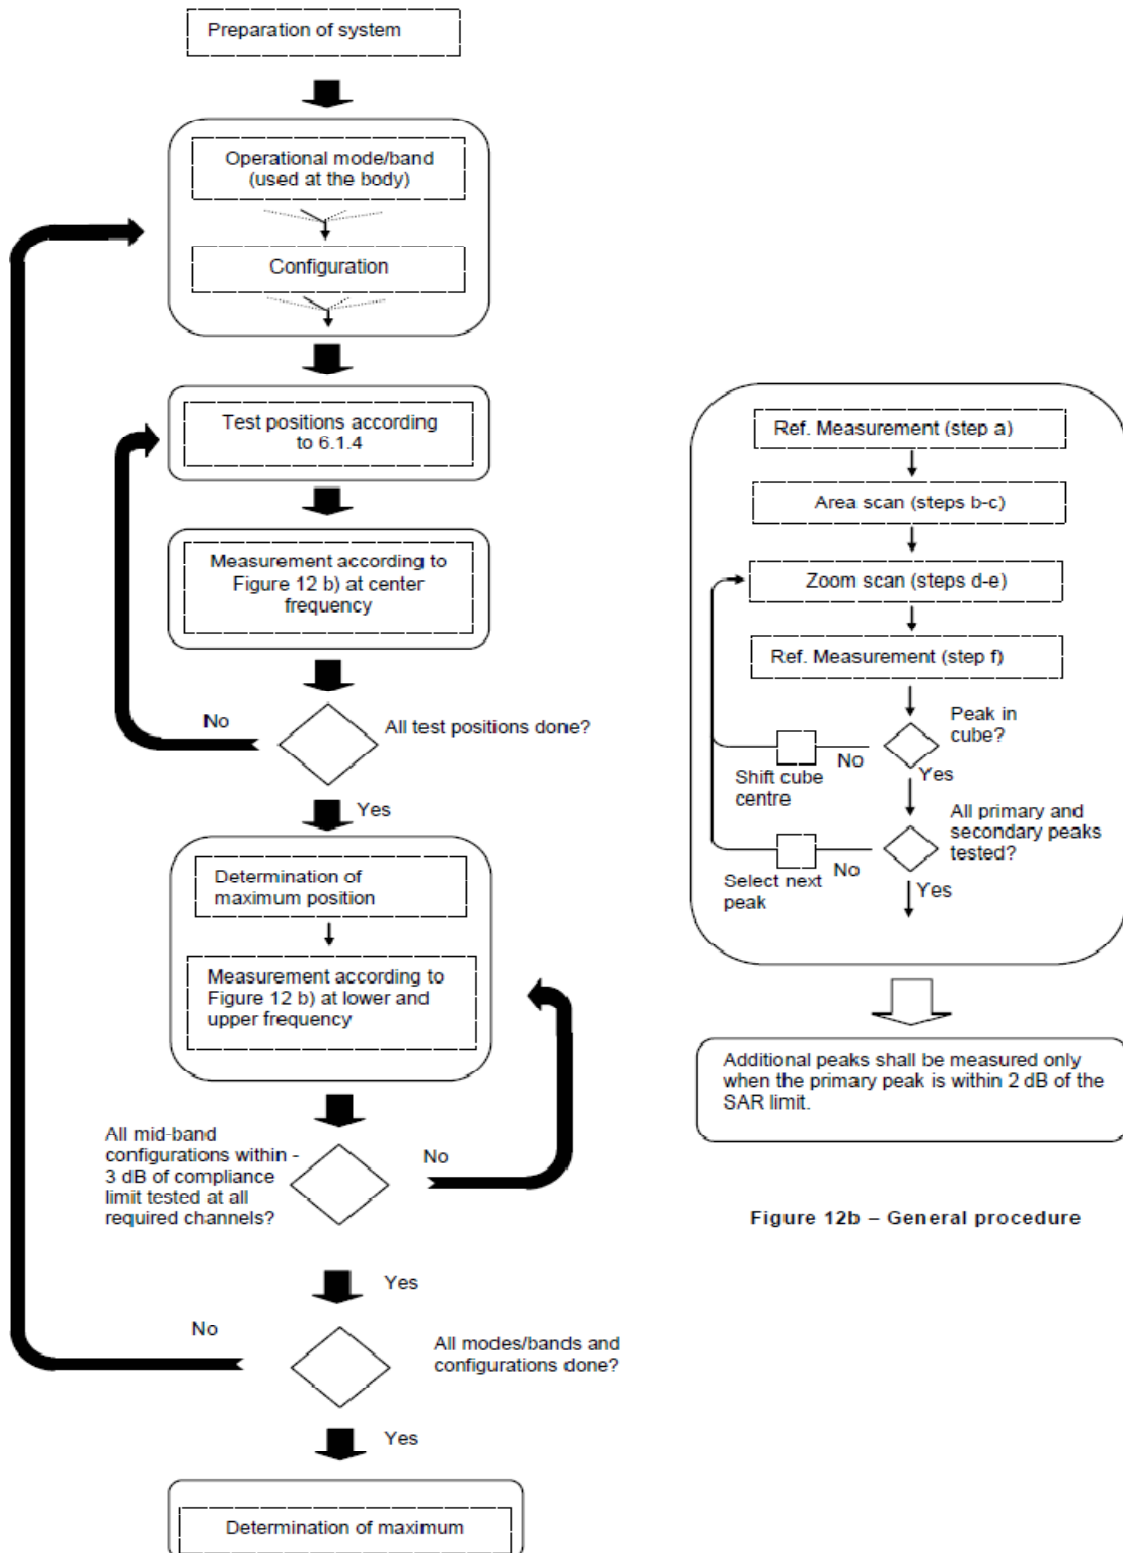


Figure 12b – General procedure

18. Test Results List

18.1. Test Guidance

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)".
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor.
 - d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - a. ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - b. ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - c. ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
5. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for tablet modes to compare with the 1.2 W/kg SAR test reduction threshold.
6. Per KDB248227 D01v02r02, a Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement. The test frequencies established using test mode must correspond to the actual channel frequencies required for operations in the U.S. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. In addition, a periodic

transmission duty factor is required for current generation SAR systems to measure SAR correctly. Unless it is permitted by specific KDB procedures or continuous transmission is specifically restricted by the device, the reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. When a device is not capable of sustaining continuous transmission or the output can become nonlinear, and it is limited by hardware design and unable to transmit at higher than 85% duty factor, a periodic duty factor within 15% of the maximum duty factor the device is capable of transmitting should be used. The reported SAR must be scaled to the maximum transmission duty factor to determine compliance. Descriptions of the procedures applied to establish the specific duty factor used for SAR testing are required in SAR reports to support the test results.

7. The EUT respectively defined the top and bottom antenna maximum power in the software. The top and bottom antenna will switch automatically according to the receiver signal strength and maximum transmission power level.
8. For CA intra-band uplink, SAR measurement was performed at the worst condition of standalone carrier.
9. The 5G NR (NSA) SAR measurement procedure should be followed the TCB workshop publication in October 2020:
 - a. If the signal uplink 1-g SAR values for each band are both less than 0.8 W/kg and the algebraic summation of the 1-g SAR values are less than 1.45 W/kg no additional measurements need to be performed.
 - b. If one or the signal uplink 1-g SAR values is greater than 0.8 W/kg, instead of algebraically summing the 1-g SAR values, sum up the SAR distributions, similar to the enlarged zoom scan (volume scan) procedures found in FCC KDB Publication 865664 D01. And PAG is required for this case.
 - c. If the algebraic sum of the 1-g SAR values is > 1.45 W/kg additional measurements may have to be made. Submit a KDB inquiry for additional guidance and PAG is required for this case.
 - d. When the algebraic sum of the 1-g SAR values is > 1.6 W/kg, SPLSR analysis procedure should be applied.
10. The EUT respectively defined the top and bottom antenna maximum power in the software, both of them will switch automatically according to the receiver signal strength and maximum transmission power level.
11. In general, the full power is applied to the top and bottom antenna, however when the receiver is on, the reduced power of some WWAN bands will be applied to the top antenna. In addition, for the top antenna that the receiver is off, another power reduction level will be also applied and used to testing the body.
12. For WLAN 5.2GHz/5.3 GHz/5.5GHz ant.6, When the receiver is active the standalone transmitting power will reduce a power level automatically for head.
13. When the receiver is off the standalone transmitting power of WLAN 5.8GHz ant.7 will be



reduced a power level automatically for body.

14. When the EN-DC mode is active, both the LTE and NR bands will reduce a power level, and SAR result would be recorded in this report.
15. When the WWAN and WLAN transmitter transmit simultaneously, both the WLAN bands and some of WWAN bands including the EN-DC will reduce the power of LTE and NR bands automatically.
16. For EN-DC measurement, only the worst condition of the standalone carrier including LTE and NR would be performed, the other exposure position would be used the same result since it is the most conservative for this band.
17. According to the report (Report No. SZ21040341W04), the maximum E-field level of NFC at 3m which was converted to EIRP is closed to zero, therefore it is not required for RF exposure.

18.2. Head SAR Data

➤ GSM Head SAR

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Ant. 1 (Reduction Power)								
1#	GPRS850/2TX slots	Right Cheek	189	26.65	27.50	1.216	0.467	0.568
	GPRS850/2TX slots	Right Tilt	189	26.65	27.50	1.216	0.367	0.446
	GPRS850/2TX slots	Left Cheek	189	26.65	27.50	1.216	0.393	0.478
	GPRS850/2TX slots	Left Tilt	189	26.65	27.50	1.216	0.286	0.348
Ant.0 (Full Power)								
	GPRS850/2TX slots	Right Cheek	189	30.15	31.00	1.216	0.180	0.218
	GPRS850/2TX slots	Right Tilt	189	30.15	31.00	1.216	0.116	0.141
	GPRS850/2TX slots	Left Cheek	189	30.15	31.00	1.216	0.219	0.266
	GPRS850/2TX slots	Left Tilt	189	30.15	31.00	1.216	0.103	0.126
Ant. 1 (Reduction Power)								
	GPRS1900/4TX slots	Right Cheek	661	20.01	21.00	1.256	0.254	0.319
2#	GPRS1900/4TX slots	Right Tilt	661	20.01	21.00	1.256	0.280	0.352
	GPRS1900/4TX slots	Left Cheek	661	20.01	21.00	1.256	0.144	0.181
	GPRS1900/4TX slots	Left Tilt	661	20.01	21.00	1.256	0.104	0.131
Ant.0 (Full Power)								
	GPRS1900/4TX slots	Right Cheek	661	24.01	25.00	1.256	0.062	0.077
	GPRS1900/4TX slots	Right Tilt	661	24.01	25.00	1.256	0.043	0.054
	GPRS1900/4TX slots	Left Cheek	661	24.01	25.00	1.256	0.066	0.083



REPORT No. : SZ21040341S01

	GPRS1900/4TX slots	Left Tilt	661	24.01	25.00	1.256	0.052	0.065
--	--------------------	-----------	-----	-------	-------	-------	-------	-------

➤ **WCDMA Head SAR**

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Ant. 1 (Reduction Power)								
	Band II/RMC 12.2Kbps	Right Cheek	9400	15.08	16.00	1.236	0.622	0.769
	Band II/RMC 12.2Kbps	Right Tilt	9400	15.08	16.00	1.236	0.795	0.983
	Band II/RMC 12.2Kbps	Left Cheek	9400	15.08	16.00	1.236	0.405	0.501
	Band II/RMC 12.2Kbps	Left Tilt	9400	15.08	16.00	1.236	0.533	0.659
3#	Band II/RMC 12.2Kbps	Right Tilt	9262	15.01	16.00	1.256	0.784	0.985
	Band II/RMC 12.2Kbps	Right Tilt	9538	15.05	16.00	1.245	0.728	0.906
Ant. 0 (Full Power)								
	Band II/RMC 12.2Kbps	Right Cheek	9400	23.08	24.00	1.236	0.070	0.086
	Band II/RMC 12.2Kbps	Right Tilt	9400	23.08	24.00	1.236	0.062	0.077
	Band II/RMC 12.2Kbps	Left Cheek	9400	23.08	24.00	1.236	0.117	0.145
	Band II/RMC 12.2Kbps	Left Tilt	9400	23.08	24.00	1.236	0.083	0.103
Ant. 1 (Reduction Power)								
	Band IV/RMC 12.2Kbps	Right Cheek	1413	15.61	16.50	1.227	0.588	0.722
	Band IV/RMC 12.2Kbps	Right Tilt	1413	15.61	16.50	1.227	0.734	0.901
	Band IV/RMC 12.2Kbps	Left Cheek	1413	15.61	16.50	1.227	0.377	0.463
	Band IV/RMC 12.2Kbps	Left Tilt	1413	15.61	16.50	1.227	0.472	0.579
	Band IV/RMC 12.2Kbps	Right Tilt	1312	15.60	16.50	1.230	0.706	0.869
4#	Band IV/RMC 12.2Kbps	Right Tilt	1513	15.49	16.50	1.262	0.772	0.974
Ant. 0 (Full Power)								
	Band IV/RMC 12.2Kbps	Right Cheek	1413	22.11	23.00	1.227	0.109	0.133
	Band IV/RMC 12.2Kbps	Right Tilt	1413	22.11	23.00	1.227	0.074	0.091
	Band IV/RMC 12.2Kbps	Left Cheek	1413	22.11	23.00	1.227	0.163	0.200
	Band IV/RMC 12.2Kbps	Left Tilt	1413	22.11	23.00	1.227	0.034	0.042
Ant. 1 (Reduction Power)								
5#	Band V/RMC 12.2Kbps	Right Cheek	4182	22.52	23.50	1.253	0.709	0.888
	Band V/RMC 12.2Kbps	Right Tilt	4182	22.52	23.50	1.253	0.686	0.860
	Band V/RMC 12.2Kbps	Left Cheek	4182	22.52	23.50	1.253	0.636	0.797
	Band V/RMC 12.2Kbps	Left Tilt	4182	22.52	23.50	1.253	0.523	0.655
	Band V/RMC 12.2Kbps	Right Cheek	4132	22.50	23.50	1.259	0.693	0.872
	Band V/RMC 12.2Kbps	Right Cheek	4233	22.47	23.50	1.268	0.697	0.884
	Band V/RMC 12.2Kbps	Right Tilt	4132	22.50	23.50	1.259	0.681	0.857



REPORT No. : SZ21040341S01

	Band V/RMC 12.2Kbps	Right Tilt	4233	22.47	23.50	1.268	0.686	0.870
Ant. 0 (Full Power)								
	Band V/RMC 12.2Kbps	Right Cheek	4182	23.52	24.50	1.253	0.118	0.147
	Band V/RMC 12.2Kbps	Right Tilt	4182	23.52	24.50	1.253	0.078	0.098
	Band V/RMC 12.2Kbps	Left Cheek	4182	23.52	24.50	1.253	0.159	0.199
	Band V/RMC 12.2Kbps	Left Tilt	4182	23.52	24.50	1.253	0.081	0.101

➤ **LTE QPSK Head SAR**

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Ant 1(Reduction Power)								
	LTE Band 2/1RB#0 20M	Right Cheek	18900	16.33	17.00	1.167	0.820	0.957
	LTE Band 2/1RB#0 20M	Right Tilt	18900	16.33	17.00	1.167	1.020	1.190
	LTE Band 2/1RB#0 20M	Left Cheek	18900	16.33	17.00	1.167	0.456	0.532
	LTE Band 2/1RB#0 20M	Left Tilt	18900	16.33	17.00	1.167	0.553	0.645
	LTE Band 2/1RB#0 20M	Right Cheek	18700	16.22	17.00	1.197	0.825	0.987
	LTE Band 2/1RB#0 20M	Right Cheek	19100	16.18	17.00	1.208	0.768	0.928
	LTE Band 2/1RB#0 20M	Right Tilt	18700	16.22	17.00	1.197	0.993	1.188
	LTE Band 2/1RB#0 20M	Right Tilt	19100	16.18	17.00	1.208	0.968	1.169
	LTE Band 2/50RB#0 20M	Right Cheek	18900	15.32	16.00	1.169	0.823	0.962
	LTE Band 2/50RB#0 20M	Right Tilt	18900	15.32	16.00	1.169	0.936	1.095
	LTE Band 2/50RB#0 20M	Left Cheek	18900	15.32	16.00	1.169	0.444	0.519
	LTE Band 2/50RB#0 20M	Left Tilt	18900	15.32	16.00	1.169	0.583	0.682
	LTE Band 2/50RB#0 20M	Right Cheek	18700	15.30	16.00	1.175	0.845	0.993
	LTE Band 2/50RB#0 20M	Right Cheek	19100	15.24	16.00	1.191	0.775	0.923
6#	LTE Band 2/50RB#0 20M	Right Tilt	18700	15.32	16.00	1.169	1.020	1.193
	LTE Band 2/50RB#0 20M	Right Tilt	19100	15.24	16.00	1.191	0.855	1.019
	LTE Band 2/100RB#0 20M	Right Tilt	18900	14.65	16.00	1.365	0.756	1.032
Ant 0(Full Power)								
	LTE Band 2/1RB#0 20M	Right Cheek	18900	22.73	23.50	1.194	0.070	0.083
	LTE Band 2/1RB#0 20M	Right Tilt	18900	22.73	23.50	1.194	0.067	0.080
	LTE Band 2/1RB#0 20M	Left Cheek	18900	22.73	23.50	1.194	0.081	0.097
	LTE Band 2/1RB#0 20M	Left Tilt	18900	22.73	23.50	1.194	0.048	0.058
	LTE Band 2/50RB#0 20M	Right Cheek	18900	21.76	22.50	1.186	0.059	0.070
	LTE Band 2/50RB#0 20M	Right Tilt	18900	21.76	22.50	1.186	0.055	0.066
	LTE Band 2/50RB#0 20M	Left Cheek	18900	21.76	22.50	1.186	0.040	0.047



	LTE Band 2/50RB#0 20M	Left Tilt	18900	21.76	22.50	1.186	0.067	0.079
Ant. 1 For EN-DC/Simultaneous Transmission (Reduction Power)								
	LTE Band 2/1RB#0 20M	Right Cheek	18900	11.76	12.50	1.186	0.508	0.602
	LTE Band 2/1RB#0 20M	Right Tilt	18900	11.76	12.50	1.186	0.615	0.729
	LTE Band 2/1RB#0 20M	Left Cheek	18900	11.76	12.50	1.186	0.282	0.335
	LTE Band 2/1RB#0 20M	Left Tilt	18900	11.76	12.50	1.186	0.342	0.406
	LTE Band 2/50RB#0 20M	Right Cheek	18900	10.76	11.50	1.186	0.510	0.604
	LTE Band 2/50RB#0 20M	Right Tilt	18900	10.76	11.50	1.186	0.580	0.687
	LTE Band 2/50RB#0 20M	Left Cheek	18900	10.76	11.50	1.186	0.275	0.326
	LTE Band 2/50RB#0 20M	Left Tilt	18900	10.76	11.50	1.186	0.361	0.428
Ant 1(Reduction Power)								
	LTE Band 4/1RB#0 20M	Right Cheek	20175	15.96	17.00	1.271	0.627	0.797
	LTE Band 4/1RB#0 20M	Right Tilt	20175	15.96	17.00	1.271	0.781	0.992
	LTE Band 4/1RB#0 20M	Left Cheek	20175	15.96	17.00	1.271	0.342	0.435
	LTE Band 4/1RB#0 20M	Left Tilt	20175	15.96	17.00	1.271	0.460	0.584
	LTE Band 4/1RB#0 20M	Right Tilt	20050	15.90	17.00	1.288	0.741	0.955
	LTE Band 4/1RB#0 20M	Right Tilt	20300	15.93	17.00	1.279	0.749	0.958
	LTE Band 4/50RB#0 20M	Right Cheek	20175	14.92	16.00	1.282	0.635	0.814
	LTE Band 4/50RB#0 20M	Right Tilt	20175	14.92	16.00	1.282	0.788	1.010
	LTE Band 4/50RB#0 20M	Left Cheek	20175	14.92	16.00	1.282	0.342	0.439
	LTE Band 4/50RB#0 20M	Left Tilt	20175	14.92	16.00	1.282	0.450	0.577
	LTE Band 4/50RB#0 20M	Right Tilt	20050	14.83	16.00	1.309	0.741	0.970
7#	LTE Band 4/50RB#0 20M	Right Tilt	20300	14.86	16.00	1.300	0.780	1.014
	LTE Band 4/100RB#0 20M	Right Tilt	20175	14.62	16.00	1.374	0.620	0.852
Ant 0(Full Power)								
	LTE Band 4/1RB#0 20M	Right Cheek	20175	22.46	23.50	1.271	0.073	0.093
	LTE Band 4/1RB#0 20M	Right Tilt	20175	22.46	23.50	1.271	0.064	0.081
	LTE Band 4/1RB#0 20M	Left Cheek	20175	22.46	23.50	1.271	0.120	0.152
	LTE Band 4/1RB#0 20M	Left Tilt	20175	22.46	23.50	1.271	0.017	0.022
	LTE Band 4/50RB#0 20M	Right Cheek	20175	21.42	22.50	1.282	0.060	0.077
	LTE Band 4/50RB#0 20M	Right Tilt	20175	21.42	22.50	1.282	0.063	0.081
	LTE Band 4/50RB#0 20M	Left Cheek	20175	21.42	22.50	1.282	0.099	0.127
	LTE Band 4/50RB#0 20M	Left Tilt	20175	21.42	22.50	1.282	0.015	0.019
Ant 1(Reduction Power)								
	LTE Band 5/1RB#0 10M	Right Cheek	20525	22.41	23.50	1.285	0.784	1.008



	LTE Band 5/1RB#0 10M	Right Tilt	20525	22.41	23.50	1.285	0.624	0.802
	LTE Band 5/1RB#0 10M	Left Cheek	20525	22.41	23.50	1.285	0.561	0.721
	LTE Band 5/1RB#0 10M	Left Tilt	20525	22.41	23.50	1.285	0.482	0.620
	LTE Band 5/1RB#0 10M	Right Cheek	20450	22.40	23.50	1.288	0.796	1.025
	LTE Band 5/1RB#0 10M	Right Cheek	20600	22.38	23.50	1.294	0.781	1.011
	LTE Band 5/1RB#0 10M	Right Tilt	20450	22.40	23.50	1.288	0.642	0.827
	LTE Band 5/1RB#0 10M	Right Tilt	20600	22.38	23.50	1.294	0.623	0.806
	LTE Band 5/25RB#0 10M	Right Cheek	20525	21.40	22.50	1.288	0.754	0.971
	LTE Band 5/25RB#0 10M	Right Tilt	20525	21.40	22.50	1.288	0.672	0.866
	LTE Band 5/25RB#0 10M	Left Cheek	20525	21.40	22.50	1.288	0.575	0.741
	LTE Band 5/25RB#0 10M	Left Tilt	20525	21.40	22.50	1.288	0.491	0.633
	LTE Band 5/25RB#0 10M	Right Cheek	20450	21.34	22.50	1.306	0.779	1.018
8#	LTE Band 5/25RB#0 10M	Right Cheek	20600	21.32	22.50	1.312	0.841	1.104
	LTE Band 5/25RB#0 10M	Right Tilt	20450	21.34	22.50	1.306	0.674	0.880
	LTE Band 5/25RB#0 10M	Right Tilt	20600	21.32	22.50	1.312	0.652	0.856
	LTE Band 5/50RB#0 10M	Right Cheek	20525	21.28	22.50	1.324	0.595	0.788
Ant 0(Full Power)								
	LTE Band 5/1RB#0 10M	Right Cheek	20525	23.41	24.50	1.285	0.082	0.106
	LTE Band 5/1RB#0 10M	Right Tilt	20525	23.41	24.50	1.285	0.049	0.064
	LTE Band 5/1RB#0 10M	Left Cheek	20525	23.41	24.50	1.285	0.130	0.167
	LTE Band 5/1RB#0 10M	Left Tilt	20525	23.41	24.50	1.285	0.049	0.063
	LTE Band 5/25RB#0 10M	Right Cheek	20525	22.40	23.50	1.288	0.073	0.094
	LTE Band 5/25RB#0 10M	Right Tilt	20525	22.40	23.50	1.288	0.044	0.057
	LTE Band 5/25RB#0 10M	Left Cheek	20525	22.40	23.50	1.288	0.112	0.144
	LTE Band 5/25RB#0 10M	Left Tilt	20525	22.40	23.50	1.288	0.040	0.052
Ant. 1 For EN-DC/Simultaneous Transmission (Reduction Power)								
	LTE Band 5/1RB#0 10M	Right Cheek	20525	21.41	22.50	1.285	0.310	0.399
	LTE Band 5/1RB#0 10M	Right Tilt	20525	21.41	22.50	1.285	0.247	0.318
	LTE Band 5/1RB#0 10M	Left Cheek	20525	21.41	22.50	1.285	0.222	0.286
	LTE Band 5/1RB#0 10M	Left Tilt	20525	21.41	22.50	1.285	0.191	0.245
	LTE Band 5/25RB#0 10M	Right Cheek	20525	20.40	21.50	1.288	0.299	0.385
	LTE Band 5/25RB#0 10M	Right Tilt	20525	20.40	21.50	1.288	0.266	0.343
	LTE Band 5/25RB#0 10M	Left Cheek	20525	20.40	21.50	1.288	0.228	0.293
	LTE Band 5/25RB#0 10M	Left Tilt	20525	20.40	21.50	1.288	0.194	0.250
Ant 1(Reduction Power)								



	LTE Band 7/1RB#0 20M	Right Cheek	21100	16.21	17.20	1.256	0.572	0.718
	LTE Band 7/1RB#0 20M	Right Tilt	21100	16.21	17.20	1.256	0.715	0.898
	LTE Band 7/1RB#0 20M	Left Cheek	21100	16.21	17.20	1.256	0.248	0.311
	LTE Band 7/1RB#0 20M	Left Tilt	21100	16.21	17.20	1.256	0.359	0.451
	LTE Band 7/1RB#0 20M	Right Tilt	20850	16.15	17.20	1.274	0.681	0.867
	LTE Band 7/1RB#0 20M	Right Tilt	21350	16.04	17.20	1.306	0.572	0.747
	LTE Band 7/50RB#0 20M	Right Cheek	21100	15.37	16.20	1.211	0.616	0.746
	LTE Band 7/50RB#0 20M	Right Tilt	21100	15.37	16.20	1.211	0.788	0.954
	LTE Band 7/50RB#0 20M	Left Cheek	21100	15.37	16.20	1.211	0.250	0.303
	LTE Band 7/50RB#0 20M	Left Tilt	21100	15.37	16.20	1.211	0.361	0.437
	LTE Band 7/50RB#0 20M	Right Tilt	20850	15.35	16.20	1.216	0.803	0.977
9#	LTE Band 7/50RB#0 20M	Right Tilt	21350	15.31	16.20	1.227	0.819	1.005
	LTE Band 7/100RB#0 20M	Right Tilt	21100	15.02	16.20	1.312	0.597	0.783
Ant 0(Full Power)								
	LTE Band 7/1RB#0 20M	Right Cheek	21100	22.71	23.70	1.256	0.435	0.546
	LTE Band 7/1RB#0 20M	Right Tilt	21100	22.71	23.70	1.256	0.379	0.292
	LTE Band 7/1RB#0 20M	Left Cheek	21100	22.71	23.70	1.256	0.218	0.274
	LTE Band 7/1RB#0 20M	Left Tilt	21100	22.71	23.70	1.256	0.218	0.274
	LTE Band 7/50RB#0 20M	Right Cheek	21100	21.87	22.70	1.211	0.325	0.393
	LTE Band 7/50RB#0 20M	Right Tilt	21100	21.87	22.70	1.211	0.226	0.274
	LTE Band 7/50RB#0 20M	Left Cheek	21100	21.87	22.70	1.211	0.170	0.206
	LTE Band 7/50RB#0 20M	Left Tilt	21100	21.87	22.70	1.211	0.125	0.151
Ant 1(Reduction Power)								
	LTE Band 7C/50RB#0 20M	Right Tilt	21152	15.32	16.20	1.225	0.728	0.892
Ant. 1 For EN-DC/Simultaneous Transmission (Reduction Power)								
	LTE Band 7/1RB#0 20M	Right Cheek	21100	16.71	17.70	1.256	0.140	0.176
	LTE Band 7/1RB#0 20M	Right Tilt	21100	16.71	17.70	1.256	0.175	0.220
	LTE Band 7/1RB#0 20M	Left Cheek	21100	16.71	17.70	1.256	0.061	0.076
	LTE Band 7/1RB#0 20M	Left Tilt	21100	16.71	17.70	1.256	0.088	0.111
	LTE Band 7/50RB#0 20M	Right Cheek	21100	15.87	16.70	1.211	0.151	0.183
	LTE Band 7/50RB#0 20M	Right Tilt	21100	15.87	16.70	1.211	0.201	0.243
	LTE Band 7/50RB#0 20M	Left Cheek	21100	15.87	16.70	1.211	0.061	0.074
	LTE Band 7/50RB#0 20M	Left Tilt	21100	15.87	16.70	1.211	0.089	0.107
Ant 1(Full Power)								
10#	LTE Band 12/1RB#0 10M	Right Cheek	23095	23.42	24.50	1.282	0.439	0.563



	LTE Band 12/1RB#0 10M	Right Tilt	23095	23.42	24.50	1.282	0.344	0.441
	LTE Band 12/1RB#0 10M	Left Cheek	23095	23.42	24.50	1.282	0.247	0.317
	LTE Band 12/1RB#0 10M	Left Tilt	23095	23.42	24.50	1.282	0.230	0.295
	LTE Band 12/25RB#0 10M	Right Cheek	23095	22.35	23.50	1.303	0.358	0.467
	LTE Band 12/25RB#0 10M	Right Tilt	23095	22.35	23.50	1.303	0.277	0.361
	LTE Band 12/25RB#0 10M	Left Cheek	23095	22.35	23.50	1.303	0.204	0.266
	LTE Band 12/25RB#0 10M	Left Tilt	23095	22.35	23.50	1.303	0.188	0.245
Ant 0(Full Power)								
	LTE Band 12/1RB#0 10M	Right Cheek	23095	23.42	24.50	1.282	0.050	0.064
	LTE Band 12/1RB#0 10M	Right Tilt	23095	23.42	24.50	1.282	0.022	0.028
	LTE Band 12/1RB#0 10M	Left Cheek	23095	23.42	24.50	1.282	0.072	0.092
	LTE Band 12/1RB#0 10M	Left Tilt	23095	23.42	24.50	1.282	0.029	0.037
	LTE Band 12/25RB#0 10M	Right Cheek	23095	22.35	23.50	1.303	0.044	0.057
	LTE Band 12/25RB#0 10M	Right Tilt	23095	22.35	23.50	1.303	0.019	0.024
	LTE Band 12/25RB#0 10M	Left Cheek	23095	22.35	23.50	1.303	0.062	0.080
	LTE Band 12/25RB#0 10M	Left Tilt	23095	22.35	23.50	1.303	0.024	0.032
Ant 1(Reduction Power)								
	LTE Band 26/1RB#0 15M	Right Cheek	26865	22.65	23.50	1.216	0.824	1.002
	LTE Band 26/1RB#0 15M	Right Tilt	26865	22.65	23.50	1.216	0.704	0.856
	LTE Band 26/1RB#0 15M	Left Cheek	26865	22.65	23.50	1.216	0.589	0.716
	LTE Band 26/1RB#0 15M	Left Tilt	26865	22.65	23.50	1.216	0.505	0.614
	LTE Band 26/1RB#0 15M	Right Cheek	26765	22.57	23.50	1.239	0.820	1.016
11#	LTE Band 26/1RB#0 15M	Right Cheek	26965	22.58	23.50	1.236	0.846	1.046
	LTE Band 26/1RB#0 15M	Right Tilt	26765	22.57	23.50	1.239	0.697	0.863
	LTE Band 26/1RB#0 15M	Right Tilt	26965	22.58	23.50	1.236	0.706	0.873
	LTE Band 26/36RB#0 15M	Right Cheek	26865	21.68	22.50	1.208	0.731	0.883
	LTE Band 26/36RB#0 15M	Right Tilt	26865	21.68	22.50	1.208	0.616	0.744
	LTE Band 26/36RB#0 15M	Left Cheek	26865	21.68	22.50	1.208	0.556	0.672
	LTE Band 26/36RB#0 15M	Left Tilt	26865	21.68	22.50	1.208	0.456	0.551
	LTE Band 26/36RB#0 15M	Right Cheek	26765	21.65	22.50	1.216	0.843	1.025
	LTE Band 26/36RB#0 15M	Right Cheek	26965	21.60	22.50	1.230	0.748	0.920
	LTE Band 26/75RB#0 15M	Right Cheek	26865	21.64	22.50	1.219	0.625	0.762
Ant 0(Full Power)								
	LTE Band 26/1RB#0 15M	Right Cheek	26865	23.15	24.00	1.216	0.069	0.083
	LTE Band 26/1RB#0 15M	Right Tilt	26865	23.15	24.00	1.216	0.046	0.056



	LTE Band 26/1RB#0 15M	Left Cheek	26865	23.15	24.00	1.216	0.106	0.129
	LTE Band 26/1RB#0 15M	Left Tilt	26865	23.15	24.00	1.216	0.060	0.073
	LTE Band 26/36RB#0 15M	Right Cheek	26865	22.18	23.00	1.208	0.059	0.072
	LTE Band 26/36RB#0 15M	Right Tilt	26865	22.18	23.00	1.208	0.038	0.046
	LTE Band 26/36RB#0 15M	Left Cheek	26865	22.18	23.00	1.208	0.094	0.114
	LTE Band 26/36RB#0 15M	Left Tilt	26865	22.18	23.00	1.208	0.050	0.061
Ant. 1 For EN-DC/Simultaneous Transmission (Reduction Power)								
	LTE Band 26/1RB#0 15M	Right Cheek	26865	21.65	22.50	1.216	0.404	0.492
	LTE Band 26/1RB#0 15M	Right Tilt	26865	21.65	22.50	1.216	0.345	0.420
	LTE Band 26/1RB#0 15M	Left Cheek	26865	21.65	22.50	1.216	0.289	0.351
	LTE Band 26/1RB#0 15M	Left Tilt	26865	21.65	22.50	1.216	0.248	0.301
	LTE Band 26/36RB#0 15M	Right Cheek	26865	20.68	21.50	1.208	0.359	0.433
	LTE Band 26/36RB#0 15M	Right Tilt	26865	20.68	21.50	1.208	0.302	0.365
	LTE Band 26/36RB#0 15M	Left Cheek	26865	20.68	21.50	1.208	0.273	0.329
	LTE Band 26/36RB#0 15M	Left Tilt	26865	20.68	21.50	1.208	0.224	0.270
Ant 1(Reduction Power)								
	LTE Band 38/1RB#0 20M	Right Cheek	38000	21.44	22.50	1.276	0.662	0.850
	LTE Band 38/1RB#0 20M	Right Tilt	38000	21.44	22.50	1.276	0.762	0.978
	LTE Band 38/1RB#0 20M	Left Cheek	38000	21.44	22.50	1.276	0.206	0.265
	LTE Band 38/1RB#0 20M	Left Tilt	38000	21.44	22.50	1.276	0.266	0.342
	LTE Band 38/1RB#0 20M	Right Cheek	37850	21.41	22.50	1.285	0.704	0.910
	LTE Band 38/1RB#0 20M	Right Cheek	38150	21.40	22.50	1.288	0.634	0.822
	LTE Band 38/1RB#0 20M	Right Tilt	37850	21.41	22.50	1.285	0.828	1.071
	LTE Band 38/1RB#0 20M	Right Tilt	38150	21.40	22.50	1.288	0.698	0.905
	LTE Band 38/50RB#0 20M	Right Cheek	38000	20.41	21.50	1.285	0.550	0.711
	LTE Band 38/50RB#0 20M	Right Tilt	38000	20.41	21.50	1.285	0.724	0.936
	LTE Band 38/50RB#0 20M	Left Cheek	38000	20.41	21.50	1.285	0.188	0.243
	LTE Band 38/50RB#0 20M	Left Tilt	38000	20.41	21.50	1.285	0.252	0.326
12#	LTE Band 38/50RB#0 20M	Right Tilt	37850	20.31	21.50	1.315	0.816	1.080
	LTE Band 38/50RB#0 20M	Right Tilt	38150	20.38	21.50	1.294	0.675	0.879
	LTE Band 38/100RB#0 20M	Right Tilt	38000	20.20	21.50	1.349	0.687	0.932
Ant 0(Full Power)								
	LTE Band 38/1RB#0 20M	Right Cheek	38000	22.94	24.00	1.276	0.163	0.209
	LTE Band 38/1RB#0 20M	Right Tilt	38000	22.94	24.00	1.276	0.153	0.197



REPORT No. : SZ21040341S01

	LTE Band 38/1RB#0 20M	Left Cheek	38000	22.94	24.00	1.276	0.081	0.104
	LTE Band 38/1RB#0 20M	Left Tilt	38000	22.94	24.00	1.276	0.061	0.078
	LTE Band 38/50RB#0 20M	Right Cheek	38000	21.91	23.00	1.285	0.126	0.162
	LTE Band 38/50RB#0 20M	Right Tilt	38000	21.91	23.00	1.285	0.115	0.149
	LTE Band 38/50RB#0 20M	Left Cheek	38000	21.91	23.00	1.285	0.064	0.083
	LTE Band 38/50RB#0 20M	Left Tilt	38000	21.91	23.00	1.285	0.062	0.080
Ant 1(Reduction Power)								
	LTE Band 38C/50RB#0 20M	Right Tilt	37850	20.29	21.50	1.321	0.810	1.077
Ant 1(Reduction Power)								
	LTE Band 41/1RB#0 20M	Right Cheek	40620	20.92	22.00	1.282	0.597	0.770
	LTE Band 41/1RB#0 20M	Right Tilt	40620	20.92	22.00	1.282	0.679	0.876
	LTE Band 41/1RB#0 20M	Left Cheek	40620	20.92	22.00	1.282	0.174	0.224
	LTE Band 41/1RB#0 20M	Left Tilt	40620	20.92	22.00	1.282	0.229	0.295
	LTE Band 41/1RB#0 20M	Right Tilt	39750	20.73	22.00	1.340	0.512	0.690
13#	LTE Band 41/1RB#0 20M	Right Tilt	40185	20.83	22.00	1.309	0.820	1.080
	LTE Band 41/1RB#0 20M	Right Tilt	41055	20.76	22.00	1.330	0.512	0.685
	LTE Band 41/1RB#0 20M	Right Tilt	41490	20.78	22.00	1.324	0.358	0.477
	LTE Band 41/50RB#0 20M	Right Cheek	40620	19.89	21.00	1.291	0.487	0.633
	LTE Band 41/50RB#0 20M	Right Tilt	40620	19.89	21.00	1.291	0.737	0.957
	LTE Band 41/50RB#0 20M	Left Cheek	40620	19.89	21.00	1.291	0.158	0.205
	LTE Band 41/50RB#0 20M	Left Tilt	40620	19.89	21.00	1.291	0.176	0.229
	LTE Band 41/50RB#0 20M	Right Tilt	39750	19.86	21.00	1.300	0.692	0.905
	LTE Band 41/50RB#0 20M	Right Tilt	40185	19.80	21.00	1.318	0.748	0.992
	LTE Band 41/50RB#0 20M	Right Tilt	41055	19.76	21.00	1.330	0.483	0.646
	LTE Band 41/50RB#0 20M	Right Tilt	41490	19.81	21.00	1.315	0.358	0.474
	LTE Band 41/100RB#0 20M	Right Tilt	40620	19.55	21.00	1.396	0.651	0.914
Ant 0(Full Power)								
	LTE Band 41/1RB#0 20M	Right Cheek	40620	22.92	24.00	1.282	0.164	0.212
	LTE Band 41/1RB#0 20M	Right Tilt	40620	22.92	24.00	1.282	0.057	0.073
	LTE Band 41/1RB#0 20M	Left Cheek	40620	22.92	24.00	1.282	0.035	0.045
	LTE Band 41/1RB#0 20M	Left Tilt	40620	22.92	24.00	1.282	0.032	0.042
	LTE Band 41/50RB#0 20M	Right Cheek	40620	21.89	23.00	1.291	0.123	0.160
	LTE Band 41/50RB#0 20M	Right Tilt	40620	21.89	23.00	1.291	0.047	0.061



	LTE Band 41/50RB#0 20M	Left Cheek	40620	21.89	23.00	1.291	0.027	0.035
	LTE Band 41/50RB#0 20M	Left Tilt	40620	21.89	23.00	1.291	0.024	0.031
Ant 1(Reduction Power)								
	LTE Band 41C/1RB#0 20M	Right Tilt	40521	20.83	22.00	1.309	0.782	1.030
Ant 4(Full Power)								
14#	LTE Band 66/1RB#0 20M	Right Cheek	132322	23.46	24.30	1.213	0.636	0.772
	LTE Band 66/1RB#0 20M	Right Tilt	132322	23.46	24.30	1.213	0.196	0.238
	LTE Band 66/1RB#0 20M	Left Cheek	132322	23.46	24.30	1.213	0.317	0.385
	LTE Band 66/1RB#0 20M	Left Tilt	132322	23.46	24.30	1.213	0.153	0.186
	LTE Band 66/50RB#0 20M	Right Cheek	132322	22.54	23.30	1.191	0.532	0.634
	LTE Band 66/50RB#0 20M	Right Tilt	132322	22.54	23.30	1.191	0.149	0.177
	LTE Band 66/50RB#0 20M	Left Cheek	132322	22.54	23.30	1.191	0.281	0.335
	LTE Band 66/50RB#0 20M	Left Tilt	132322	22.54	23.30	1.191	0.121	0.144
Ant 0(Full Power)								
	LTE Band 66/1RB#0 20M	Right Cheek	132322	23.46	24.30	1.213	0.077	0.093
	LTE Band 66/1RB#0 20M	Right Tilt	132322	23.46	24.30	1.213	0.045	0.055
	LTE Band 66/1RB#0 20M	Left Cheek	132322	23.46	24.30	1.213	0.078	0.095
	LTE Band 66/1RB#0 20M	Left Tilt	132322	23.46	24.30	1.213	0.014	0.017
	LTE Band 66/50RB#0 20M	Right Cheek	132322	22.54	23.30	1.191	0.042	0.050
	LTE Band 66/50RB#0 20M	Right Tilt	132322	22.54	23.30	1.191	0.029	0.035
	LTE Band 66/50RB#0 20M	Left Cheek	132322	22.54	23.30	1.191	0.041	0.049
	LTE Band 66/50RB#0 20M	Left Tilt	132322	22.54	23.30	1.191	0.011	0.013
Ant. 4 For EN-DC/Simultaneous Transmission (Reduction Power)								
	LTE Band 66/1RB#0 20M	Right Cheek	132322	22.46	23.30	1.213	0.167	0.203
	LTE Band 66/1RB#0 20M	Right Tilt	132322	22.46	23.30	1.213	0.053	0.064
	LTE Band 66/1RB#0 20M	Left Cheek	132322	22.46	23.30	1.213	0.085	0.104
	LTE Band 66/1RB#0 20M	Left Tilt	132322	22.46	23.30	1.213	0.041	0.050
	LTE Band 66/50RB#0 20M	Right Cheek	132322	21.54	22.30	1.191	0.143	0.171
	LTE Band 66/50RB#0 20M	Right Tilt	132322	21.54	22.30	1.191	0.040	0.048
	LTE Band 66/50RB#0 20M	Left Cheek	132322	21.54	22.30	1.191	0.076	0.090
	LTE Band 66/50RB#0 20M	Left Tilt	132322	21.54	22.30	1.191	0.033	0.039



➤ 5G NR DFT-s-QPSK Head SAR

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Ant 1(Reduction Power)								
15#	NR n5/1RB#1 20M	Right Cheek	167300	21.11	22.20	1.285	0.561	0.721
	NR n5/1RB#1 20M	Right Tilt	167300	21.11	22.20	1.285	0.488	0.627
	NR n5/1RB#1 20M	Left Cheek	167300	21.11	22.20	1.285	0.430	0.553
	NR n5/1RB#1 20M	Left Tilt	167300	21.11	22.20	1.285	0.388	0.499
	NR n5/50RB#1 20M	Right Cheek	167300	20.70	21.70	1.259	0.481	0.606
	NR n5/50RB#1 20M	Right Tilt	167300	20.70	21.70	1.259	0.396	0.499
	NR n5/50RB#1 20M	Left Cheek	167300	20.70	21.70	1.259	0.346	0.436
	NR n5/50RB#1 20M	Left Tilt	167300	20.70	21.70	1.259	0.331	0.417
Ant 0(Full Power)								
	NR n5/1RB#1 20M	Right Cheek	167300	23.61	24.70	1.285	0.111	0.143
	NR n5/1RB#1 20M	Right Tilt	167300	23.61	24.70	1.285	0.046	0.059
	NR n5/1RB#1 20M	Left Cheek	167300	23.61	24.70	1.285	0.163	0.210
	NR n5/1RB#1 20M	Left Tilt	167300	23.61	24.70	1.285	0.077	0.099
	NR n5/50RB#1 20M	Right Cheek	167300	23.20	24.20	1.259	0.138	0.174
	NR n5/50RB#1 20M	Right Tilt	167300	23.20	24.20	1.259	0.066	0.083
	NR n5/50RB#1 20M	Left Cheek	167300	23.20	24.20	1.259	0.184	0.232
	NR n5/50RB#1 20M	Left Tilt	167300	23.20	24.20	1.259	0.083	0.105
Ant. 1 For EN-DC/Simultaneous Transmission (Reduction Power)								
	NR n5/1RB#1 20M	Right Cheek	167300	18.20	19.20	1.259	0.406	0.511
	NR n5/1RB#1 20M	Right Tilt	167300	18.20	19.20	1.259	0.327	0.412
	NR n5/1RB#1 20M	Left Cheek	167300	18.20	19.20	1.259	0.102	0.128
	NR n5/1RB#1 20M	Left Tilt	167300	18.20	19.20	1.259	0.077	0.097
	NR n5/50RB#1 20M	Right Cheek	167300	17.79	19.20	1.384	0.348	0.482
	NR n5/50RB#1 20M	Right Tilt	167300	17.79	19.20	1.384	0.287	0.397
	NR n5/50RB#1 20M	Left Cheek	167300	17.79	19.20	1.384	0.088	0.122
	NR n5/50RB#1 20M	Left Tilt	167300	17.79	19.20	1.384	0.068	0.094
Ant 1(Reduction Power)								
	NR n7/1RB#1 20M	Right Cheek	507000	15.06	16.20	1.300	0.624	0.811
	NR n7/1RB#1 20M	Right Tilt	507000	15.06	16.20	1.300	0.685	0.891
	NR n7/1RB#1 20M	Left Cheek	507000	15.06	16.20	1.300	0.248	0.322
	NR n7/1RB#1 20M	Left Tilt	507000	15.06	16.20	1.300	0.362	0.471



REPORT No. : SZ21040341S01

	NR n7/1RB#1 20M	Right Cheek	502000	15.00	16.20	1.318	0.481	0.634
	NR n7/1RB#1 20M	Right Cheek	512000	14.97	16.20	1.327	0.621	0.824
	NR n7/1RB#1 20M	Right Tilt	502000	15.00	16.20	1.318	0.651	0.858
16#	NR n7/1RB#1 20M	Right Tilt	512000	14.97	16.20	1.327	0.811	1.077
	NR n7/50RB#1 20M	Right Cheek	507000	14.65	15.70	1.274	0.451	0.574
	NR n7/50RB#1 20M	Right Tilt	507000	14.65	15.70	1.274	0.573	0.730
	NR n7/50RB#1 20M	Left Cheek	507000	14.65	15.70	1.274	0.204	0.260
	NR n7/50RB#1 20M	Left Tilt	507000	14.65	15.70	1.274	0.291	0.371
	NR n7/100RB#1 20M	Right Tilt	507000	13.98	15.70	1.486	0.650	0.966
Ant 0(Full Power)								
	NR n7/1RB#1 20M	Right Cheek	507000	22.56	23.70	1.300	0.449	0.584
	NR n7/1RB#1 20M	Right Tilt	507000	22.56	23.70	1.300	0.154	0.200
	NR n7/1RB#1 20M	Left Cheek	507000	22.56	23.70	1.300	0.262	0.341
	NR n7/1RB#1 20M	Left Tilt	507000	22.56	23.70	1.300	0.197	0.256
	NR n7/50RB#1 20M	Right Cheek	507000	22.15	23.20	1.274	0.485	0.618
	NR n7/50RB#1 20M	Right Tilt	507000	22.15	23.20	1.274	0.141	0.180
	NR n7/50RB#1 20M	Left Cheek	507000	22.15	23.20	1.274	0.109	0.138
	NR n7/50RB#1 20M	Left Tilt	507000	22.15	23.20	1.274	0.085	0.108
Ant. 1 For EN-DC/Simultaneous Transmission (Reduction Power)								
	NR n7/1RB#1 20M	Right Cheek	507000	13.16	14.20	1.271	0.389	0.494
	NR n7/1RB#1 20M	Right Tilt	507000	13.16	14.20	1.271	0.434	0.551
	NR n7/1RB#1 20M	Left Cheek	507000	13.16	14.20	1.271	0.114	0.145
	NR n7/1RB#1 20M	Left Tilt	507000	13.16	14.20	1.271	0.159	0.202
	NR n7/50RB#1 20M	Right Cheek	507000	12.65	13.70	1.274	0.329	0.419
	NR n7/50RB#1 20M	Right Tilt	507000	12.65	13.70	1.274	0.386	0.492
	NR n7/50RB#1 20M	Left Cheek	507000	12.65	13.70	1.274	0.107	0.136
	NR n7/50RB#1 20M	Left Tilt	507000	12.65	13.70	1.274	0.149	0.190
Ant 1(Reduction Power)								
	NR n38/1RB#1 40M	Right Cheek	519000	15.54	16.20	1.164	0.560	0.652
	NR n38/1RB#1 40M	Right Tilt	519000	15.54	16.20	1.164	0.702	0.817
	NR n38/1RB#1 40M	Left Cheek	519000	15.54	16.20	1.164	0.270	0.314
	NR n38/1RB#1 40M	Left Tilt	519000	15.54	16.20	1.164	0.275	0.320
17#	NR n38/1RB#1 40M	Right Tilt	516000	15.45	16.20	1.189	0.759	0.902
	NR n38/1RB#1 40M	Right Tilt	522000	15.36	16.20	1.213	0.663	0.805



REPORT No. : SZ21040341S01

	NR n38/50RB#1 40M	Right Cheek	519000	14.50	16.20	1.479	0.420	0.621
	NR n38/50RB#1 40M	Right Tilt	519000	14.50	16.20	1.479	0.533	0.788
	NR n38/50RB#1 40M	Left Cheek	519000	14.50	16.20	1.479	0.290	0.429
	NR n38/50RB#1 40M	Left Tilt	519000	14.50	16.20	1.479	0.281	0.415
	NR n38/100RB#1 40M	Right Tilt	519000	14.35	16.20	1.531	0.540	0.827
Ant 0(Full Power)								
	NR n38/1RB#1 40M	Right Cheek	519000	23.54	24.20	1.164	0.632	0.736
	NR n38/1RB#1 40M	Right Tilt	519000	23.54	24.20	1.164	0.165	0.192
	NR n38/1RB#1 40M	Left Cheek	519000	23.54	24.20	1.164	0.132	0.154
	NR n38/1RB#1 40M	Left Tilt	519000	23.54	24.20	1.164	0.100	0.116
	NR n38/50RB#1 40M	Right Cheek	519000	22.50	23.20	1.175	0.572	0.672
	NR n38/50RB#1 40M	Right Tilt	519000	22.50	23.20	1.175	0.178	0.209
	NR n38/50RB#1 40M	Left Cheek	519000	22.50	23.20	1.175	0.150	0.176
	NR n38/50RB#1 40M	Left Tilt	519000	22.50	23.20	1.175	0.120	0.141
Ant 1(Reduction Power)								
	NR n41/1RB#1 100M	Right Cheek	518598	16.18	17.20	1.265	0.696	0.880
	NR n41/1RB#1 100M	Right Tilt	518598	16.18	17.20	1.265	0.830	1.050
	NR n41/1RB#1 100M	Left Cheek	518598	16.18	17.20	1.265	0.289	0.366
	NR n41/1RB#1 100M	Left Tilt	518598	16.18	17.20	1.265	0.369	0.467
	NR n41/1RB#1 100M	Right Cheek	509202	15.87	17.20	1.358	0.695	0.944
	NR n41/1RB#1 100M	Right Cheek	513900	16.08	17.20	1.294	0.599	0.775
	NR n41/1RB#1 100M	Right Cheek	523300	16.03	17.20	1.309	0.755	0.988
	NR n41/1RB#1 100M	Right Cheek	528000	15.97	17.20	1.327	0.539	0.716
	NR n41/1RB#1 100M	Right Tilt	509202	15.87	17.20	1.358	0.829	1.126
	NR n41/1RB#1 100M	Right Tilt	513900	16.08	17.20	1.294	0.714	0.924
18#	NR n41/1RB#1 100M	Right Tilt	523300	16.03	17.20	1.309	0.900	1.178
	NR n41/1RB#1 100M	Right Tilt	528000	15.97	17.20	1.327	0.643	0.854
	NR n41/135RB#1 100M	Right Cheek	518598	15.98	17.20	1.324	0.547	0.724
	NR n41/135RB#1 100M	Right Tilt	518598	15.98	17.20	1.324	0.688	0.911
	NR n41/135RB#1 100M	Left Cheek	518598	15.98	17.20	1.324	0.182	0.241
	NR n41/135RB#1 100M	Left Tilt	518598	15.98	17.20	1.324	0.239	0.317
	NR n41/135RB#1 100M	Right Tilt	509202	15.62	17.20	1.439	0.739	1.063
	NR n41/135RB#1 100M	Right Tilt	513900	15.97	17.20	1.327	0.671	0.891
	NR n41/135RB#1 100M	Right Tilt	523300	15.59	17.20	1.449	0.465	0.674
	NR n41/135RB#1 100M	Right Tilt	528000	15.74	17.20	1.400	0.275	0.385
	NR n41/270RB#1 100M	Right Tilt	518598	15.50	17.20	1.479	0.701	1.037



Ant 0(Full Power)								
	NR n41/1RB#1 100M	Right Cheek	518598	23.68	24.20	1.127	0.495	0.558
	NR n41/1RB#1 100M	Right Tilt	518598	23.68	24.20	1.127	0.134	0.151
	NR n41/1RB#1 100M	Left Cheek	518598	23.68	24.20	1.127	0.116	0.131
	NR n41/1RB#1 100M	Left Tilt	518598	23.68	24.20	1.127	0.088	0.099
	NR n41/135RB#1 100M	Right Cheek	518598	23.48	24.20	1.180	0.358	0.422
	NR n41/135RB#1 100M	Right Tilt	518598	23.48	24.20	1.180	0.100	0.118
	NR n41/135RB#1 100M	Left Cheek	518598	23.48	24.20	1.180	0.095	0.112
	NR n41/135RB#1 100M	Left Tilt	518598	23.48	24.20	1.180	0.081	0.096
Ant. 1 For EN-DC/Simultaneous Transmission (Reduction Power)								
	NR n41/1RB#1 100M	Right Cheek	518598	13.08	14.20	1.294	0.319	0.413
	NR n41/1RB#1 100M	Right Tilt	518598	13.08	14.20	1.294	0.391	0.506
	NR n41/1RB#1 100M	Left Cheek	518598	13.08	14.20	1.294	0.082	0.106
	NR n41/1RB#1 100M	Left Tilt	518598	13.08	14.20	1.294	0.109	0.141
	NR n41/135RB#1 100M	Right Cheek	518598	12.86	14.20	1.361	0.324	0.441
	NR n41/135RB#1 100M	Right Tilt	518598	12.86	14.20	1.361	0.402	0.547
	NR n41/135RB#1 100M	Left Cheek	518598	12.86	14.20	1.361	0.098	0.134
	NR n41/135RB#1 100M	Left Tilt	518598	12.86	14.20	1.361	0.132	0.180
Ant 4(Full Power)								
	NR n66/1RB#1 20M	Right Cheek	349000	23.14	24.20	1.276	0.671	0.856
	NR n66/1RB#1 20M	Right Tilt	349000	23.14	24.20	1.276	0.204	0.260
	NR n66/1RB#1 20M	Left Cheek	349000	23.14	24.20	1.276	0.262	0.334
	NR n66/1RB#1 20M	Left Tilt	349000	23.14	24.20	1.276	0.185	0.236
19#	NR n66/1RB#1 20M	Right Cheek	344000	23.00	24.20	1.318	0.703	0.927
	NR n66/1RB#1 20M	Right Cheek	354000	22.89	24.20	1.352	0.567	0.767
	NR n66/50RB#1 20M	Right Cheek	349000	23.12	24.20	1.282	0.374	0.480
	NR n66/50RB#1 20M	Right Tilt	349000	23.12	24.20	1.282	0.163	0.209
	NR n66/50RB#1 20M	Left Cheek	349000	23.12	24.20	1.282	0.178	0.228
	NR n66/50RB#1 20M	Left Tilt	349000	23.12	24.20	1.282	0.087	0.112
	NR n66/100RB#1 20M	Right Cheek	349000	23.01	24.20	1.315	0.650	0.855
Ant 0(Full Power)								
	NR n66/1RB#1 20M	Right Cheek	349000	23.14	24.20	1.276	0.101	0.129
	NR n66/1RB#1 20M	Right Tilt	349000	23.14	24.20	1.276	0.061	0.078
	NR n66/1RB#1 20M	Left Cheek	349000	23.14	24.20	1.276	0.170	0.217
	NR n66/1RB#1 20M	Left Tilt	349000	23.14	24.20	1.276	0.049	0.063



	NR n66/50RB#1 20M	Right Cheek	349000	23.12	24.20	1.282	0.120	0.154
	NR n66/50RB#1 20M	Right Tilt	349000	23.12	24.20	1.282	0.047	0.060
	NR n66/50RB#1 20M	Left Cheek	349000	23.12	24.20	1.282	0.128	0.164
	NR n66/50RB#1 20M	Left Tilt	349000	23.12	24.20	1.282	0.025	0.032

➤ **WLAN Head SAR**

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Ant 6(Reduction Power)								
	WLAN2.4GHz/802.11b	Right Cheek	6	13.49	15.00	1.416	0.216	0.306
	WLAN2.4GHz/802.11b	Right Tilt	6	13.49	15.00	1.416	0.251	0.356
	WLAN2.4GHz/802.11b	Left Cheek	6	13.49	15.00	1.416	0.570	0.807
	WLAN2.4GHz/802.11b	Left Tilt	6	13.49	15.00	1.416	0.465	0.658
	WLAN2.4GHz/802.11b	Left Cheek	1	13.29	15.00	1.483	0.570	0.845
20#	WLAN2.4GHz/802.11b	Left Cheek	11	12.53	14.50	1.574	0.620	0.976
Ant 7(Full Power)								
	WLAN2.4GHz/802.11b	Right Cheek	6	14.63	16.50	1.538	0.139	0.214
	WLAN2.4GHz/802.11b	Right Tilt	6	14.63	16.50	1.538	0.095	0.145
	WLAN2.4GHz/802.11b	Left Cheek	6	14.63	16.50	1.538	0.055	0.084
	WLAN2.4GHz/802.11b	Left Tilt	6	14.63	16.50	1.538	0.056	0.086
Ant 6(Reduction Power)								
	WLAN5.2GHz/802.11a	Right Cheek	44	14.18	16.00	1.521	0.326	0.496
	WLAN5.2GHz/802.11a	Right Tilt	44	14.18	16.00	1.521	0.456	0.693
	WLAN5.2GHz/802.11a	Left Cheek	44	14.18	16.00	1.521	0.391	0.594
21#	WLAN5.2GHz/802.11a	Left Tilt	44	14.18	16.00	1.521	0.566	0.861
	WLAN5.2GHz/802.11a	Left Tilt	36	14.11	16.00	1.545	0.485	0.749
	WLAN5.2GHz/802.11a	Left Tilt	48	14.17	16.00	1.524	0.509	0.776
Ant 7(Full Power)								
	WLAN5.2GHz/802.11a	Right Cheek	44	16.14	18.00	1.535	0.114	0.175
	WLAN5.2GHz/802.11a	Right Tilt	44	16.14	18.00	1.535	0.067	0.103
	WLAN5.2GHz/802.11a	Left Cheek	44	16.14	18.00	1.535	0.060	0.091
	WLAN5.2GHz/802.11a	Left Tilt	44	16.14	18.00	1.535	0.048	0.074
Ant 6(Reduction Power)								
	WLAN5.3GHz/802.11a	Right Cheek	60	14.12	16.00	1.542	0.180	0.278
	WLAN5.3GHz/802.11a	Right Tilt	60	14.12	16.00	1.542	0.207	0.319
	WLAN5.3GHz/802.11a	Left Cheek	60	14.12	16.00	1.542	0.437	0.674
22#	WLAN5.3GHz/802.11a	Left Tilt	60	14.12	16.00	1.542	0.668	1.030



REPORT No. : SZ21040341S01

	WLAN5.3GHz/802.11a	Left Tilt	52	13.83	15.50	1.469	0.650	0.955
	WLAN5.3GHz/802.11a	Left Tilt	64	14.10	16.00	1.549	0.512	0.793
Ant 7(Full Power)								
	WLAN5.3GHz/802.11a	Right Cheek	60	16.65	18.50	1.531	0.158	0.242
	WLAN5.3GHz/802.11a	Right Tilt	60	16.65	18.50	1.531	0.122	0.187
	WLAN5.3GHz/802.11a	Left Cheek	60	16.65	18.50	1.531	0.052	0.079
	WLAN5.3GHz/802.11a	Left Tilt	60	16.65	18.50	1.531	0.073	0.111
Ant 6(Reduction Power)								
	WLAN5.5GHz/802.11a	Right Cheek	120	10.57	12.50	1.560	0.270	0.421
	WLAN5.5GHz/802.11a	Right Tilt	120	10.57	12.50	1.560	0.353	0.551
	WLAN5.5GHz/802.11a	Left Cheek	120	10.57	12.50	1.560	0.267	0.416
23#	WLAN5.5GHz/802.11a	Left Tilt	120	10.57	12.50	1.560	0.511	0.797
Ant 7(Full Power)								
	WLAN5.5GHz/802.11a	Right Cheek	120	15.18	17.00	1.521	0.093	0.141
	WLAN5.5GHz/802.11a	Right Tilt	120	15.18	17.00	1.521	0.065	0.098
	WLAN5.5GHz/802.11a	Left Cheek	120	15.18	17.00	1.521	0.039	0.059
	WLAN5.5GHz/802.11a	Left Tilt	120	15.18	17.00	1.521	0.040	0.061
Ant 6(Reduction Power)								
	WLAN5.8GHz/802.11a	Right Cheek	157	14.02	16.50	1.770	0.448	0.793
	WLAN5.8GHz/802.11a	Right Tilt	157	14.02	16.50	1.770	0.481	0.851
	WLAN5.8GHz/802.11a	Left Cheek	157	14.02	16.50	1.770	0.489	0.866
24#	WLAN5.8GHz/802.11a	Left Tilt	157	14.02	16.50	1.770	0.619	1.096
	WLAN5.8GHz/802.11a	Left Tilt	149	13.90	16.00	1.622	0.483	0.783
	WLAN5.8GHz/802.11a	Left Tilt	165	13.78	16.00	1.667	0.396	0.660
Ant 7(Full Power)								
	WLAN5.8GHz/802.11a	Right Cheek	157	15.12	17.00	1.542	0.282	0.435
	WLAN5.8GHz/802.11a	Right Tilt	157	15.12	17.00	1.542	0.190	0.292
	WLAN5.8GHz/802.11a	Left Cheek	157	15.12	17.00	1.542	0.082	0.126
	WLAN5.8GHz/802.11a	Left Tilt	157	15.12	17.00	1.542	0.091	0.141

➤ **WLAN Head SAR for Simultaneous Transmission Evaluation**

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Ant 6(Reduction Power)								
	WLAN2.4GHz/802.11b	Right Cheek	6	9.16	11.00	1.528	0.075	0.115
	WLAN2.4GHz/802.11b	Right Tilt	6	9.16	11.00	1.528	0.087	0.133
25#	WLAN2.4GHz/802.11b	Left Cheek	6	9.16	11.00	1.528	0.198	0.302
	WLAN2.4GHz/802.11b	Left Tilt	6	9.16	11.00	1.528	0.161	0.247
Ant 7(Reduction Power)								
	WLAN2.4GHz/802.11b	Right Cheek	6	9.13	11.00	1.538	0.139	0.214
	WLAN2.4GHz/802.11b	Right Tilt	6	9.13	11.00	1.538	0.095	0.145
	WLAN2.4GHz/802.11b	Left Cheek	6	9.13	11.00	1.538	0.055	0.084
	WLAN2.4GHz/802.11b	Left Tilt	6	9.13	11.00	1.538	0.056	0.086
Ant 6(Reduction Power)								
	WLAN5.2GHz/802.11a	Right Cheek	44	9.30	11.00	1.480	0.100	0.148
	WLAN5.2GHz/802.11a	Right Tilt	44	9.30	11.00	1.480	0.139	0.206
	WLAN5.2GHz/802.11a	Left Cheek	44	9.30	11.00	1.480	0.119	0.177
26#	WLAN5.2GHz/802.11a	Left Tilt	44	9.30	11.00	1.480	0.173	0.256
Ant 7(Reduction Power)								
	WLAN5.2GHz/802.11a	Right Cheek	44	10.02	12.00	1.578	0.114	0.180
	WLAN5.2GHz/802.11a	Right Tilt	44	10.02	12.00	1.578	0.067	0.106
	WLAN5.2GHz/802.11a	Left Cheek	44	10.02	12.00	1.578	0.060	0.094
	WLAN5.2GHz/802.11a	Left Tilt	44	10.02	12.00	1.578	0.048	0.076
Ant 6(Reduction Power)								
	WLAN5.3GHz/802.11a	Right Cheek	60	8.62	10.50	1.542	0.043	0.066
	WLAN5.3GHz/802.11a	Right Tilt	60	8.62	10.50	1.542	0.049	0.076
	WLAN5.3GHz/802.11a	Left Cheek	60	8.62	10.50	1.542	0.104	0.160
27#	WLAN5.3GHz/802.11a	Left Tilt	60	8.62	10.50	1.542	0.159	0.245
Ant 7(Reduction Power)								
	WLAN5.3GHz/802.11a	Right Cheek	60	9.01	11.00	1.581	0.142	0.225
	WLAN5.3GHz/802.11a	Right Tilt	60	9.01	11.00	1.581	0.110	0.174
	WLAN5.3GHz/802.11a	Left Cheek	60	9.01	11.00	1.581	0.046	0.073
	WLAN5.3GHz/802.11a	Left Tilt	60	9.01	11.00	1.581	0.065	0.103
Ant 6(Reduction Power)								
	WLAN5.5GHz/802.11a	Right Cheek	120	7.07	9.00	1.560	0.089	0.138
	WLAN5.5GHz/802.11a	Right Tilt	120	7.07	9.00	1.560	0.116	0.181
	WLAN5.5GHz/802.11a	Left Cheek	120	7.07	9.00	1.560	0.088	0.137
28#	WLAN5.5GHz/802.11a	Left Tilt	120	7.07	9.00	1.560	0.168	0.262



Ant 7(Reduction Power)								
	WLAN5.5GHz/802.11a	Right Cheek	120	7.09	9.00	1.552	0.081	0.125
	WLAN5.5GHz/802.11a	Right Tilt	120	7.09	9.00	1.552	0.056	0.087
	WLAN5.5GHz/802.11a	Left Cheek	120	7.09	9.00	1.552	0.034	0.052
	WLAN5.5GHz/802.11a	Left Tilt	120	7.09	9.00	1.552	0.035	0.054
Ant 6(Reduction Power)								
	WLAN5.8GHz/802.11a	Right Cheek	157	9.02	11.00	1.578	0.118	0.187
	WLAN5.8GHz/802.11a	Right Tilt	157	9.02	11.00	1.578	0.127	0.200
	WLAN5.8GHz/802.11a	Left Cheek	157	9.02	11.00	1.578	0.129	0.204
29#	WLAN5.8GHz/802.11a	Left Tilt	157	9.02	11.00	1.578	0.163	0.257
Ant 7(Reduction Power)								
	WLAN5.8GHz/802.11a	Right Cheek	157	9.36	11.00	1.459	0.141	0.206
	WLAN5.8GHz/802.11a	Right Tilt	157	9.36	11.00	1.459	0.095	0.138
	WLAN5.8GHz/802.11a	Left Cheek	157	9.36	11.00	1.459	0.041	0.060
	WLAN5.8GHz/802.11a	Left Tilt	157	9.36	11.00	1.459	0.046	0.067

Note:

1. Per KDB 447498 D01v06, for each exposure position, if the highest output power channel Reported SAR $\leq$ 0.8W/kg, other channels SAR testing is not necessary.
2. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is $\geq$ 0.8W/kg.
3. Per KDB 941225 D05v02r05, 100% RB allocation SAR measurement is not required when the highest reported SAR for 1 RB and 50% RB allocation are $\leq$ 0.8 W/kg.
4. Per KDB 248227 D01v02r02, for 802.11b DSSS, when the reported SAR of the highest measured maximum output power channel for the exposure configuration is $\leq$ 0.8 W/kg, no further SAR testing is required in that exposure configuration.
5. Per KDB 248227 D01v02r02, OFDM SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is $\leq$ 1.2 W/kg.
6. According to KDB 865664 D02v01r02, SAR plot is required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.
7. The WLAN Reported 1g SAR (W/kg) has been calculated together with the duty cycle scaling factor 1.0 for 2.4G WLAN and 1.00 for 5G WLAN.



18.3. Body SAR Data

➤ GSM Body SAR

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Ant. 1 (Full Power)								
	GPRS850/2TX slots	Front Side	189	30.15	31.00	1.216	0.377	0.459
30#	GPRS850/2TX slots	Back Side	189	30.15	31.00	1.216	0.413	0.502
	GPRS850/2TX slots	Left Side	189	30.15	31.00	1.216	0.292	0.355
	GPRS850/2TX slots	Right Side	189	30.15	31.00	1.216	0.233	0.283
	GPRS850/2TX slots	Top Side	189	30.15	31.00	1.216	0.354	0.431
Ant.0 (Full Power)								
	GPRS850/2TX slots	Front Side	189	30.15	31.00	1.216	0.200	0.243
	GPRS850/2TX slots	Back Side	189	30.15	31.00	1.216	0.331	0.403
	GPRS850/2TX slots	Left Side	189	30.15	31.00	1.216	0.089	0.108
	GPRS850/2TX slots	Right Side	189	30.15	31.00	1.216	0.235	0.286
	GPRS850/2TX slots	Bottom Side	189	30.15	31.00	1.216	0.263	0.320
Ant. 1 (Reduction Power)								
	GPRS1900/4TX slots	Front Side	661	23.01	24.00	1.256	0.119	0.149
	GPRS1900/4TX slots	Back Side	661	23.01	24.00	1.256	0.147	0.185
	GPRS1900/4TX slots	Left Side	661	23.01	24.00	1.256	0.026	0.032
	GPRS1900/4TX slots	Right Side	661	23.01	24.00	1.256	0.018	0.022
	GPRS1900/4TX slots	Top Side	661	23.01	24.00	1.256	0.275	0.345
Ant.0 (Full Power)								
	GPRS1900/4TX slots	Front Side	661	24.01	25.00	1.256	0.165	0.207
31#	GPRS1900/4TX slots	Back Side	661	24.01	25.00	1.256	0.297	0.373
	GPRS1900/4TX slots	Left Side	661	24.01	25.00	1.256	0.084	0.105
	GPRS1900/4TX slots	Right Side	661	24.01	25.00	1.256	0.059	0.074
32#	GPRS1900/4TX slots	Bottom Side	661	24.01	25.00	1.256	0.453	0.569



➤ **WCDMA Body SAR**

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Ant. 1 (Reduction Power)								
	Band II/RMC 12.2Kbps	Front Side	9400	19.58	20.50	1.236	0.508	0.628
33#	Band II/RMC 12.2Kbps	Back Side	9400	19.58	20.50	1.236	0.583	0.721
	Band II/RMC 12.2Kbps	Left Side	9400	19.58	20.50	1.236	0.092	0.114
	Band II/RMC 12.2Kbps	Right Side	9400	19.58	20.50	1.236	0.048	0.059
	Band II/RMC 12.2Kbps	Top Side	9400	19.58	20.50	1.236	0.886	1.095
	Band II/RMC 12.2Kbps	Top Side	9262	19.51	20.50	1.256	0.801	1.006
34#	Band II/RMC 12.2Kbps	Top Side	9538	19.55	20.50	1.245	0.882	1.098
Ant. 0 (Full Power)								
	Band II/RMC 12.2Kbps	Front Side	9400	23.08	24.00	1.236	0.330	0.408
	Band II/RMC 12.2Kbps	Back Side	9400	23.08	24.00	1.236	0.547	0.676
	Band II/RMC 12.2Kbps	Left Side	9400	23.08	24.00	1.236	0.093	0.115
	Band II/RMC 12.2Kbps	Right Side	9400	23.08	24.00	1.236	0.146	0.180
	Band II/RMC 12.2Kbps	Bottom Side	9400	23.08	24.00	1.236	0.863	1.067
	Band II/RMC 12.2Kbps	Bottom Side	9262	23.01	24.00	1.256	0.849	1.066
	Band II/RMC 12.2Kbps	Bottom Side	9538	23.05	24.00	1.245	0.817	1.017
Ant. 1 (Reduction Power)								
	Band IV/RMC 12.2Kbps	Front Side	1413	21.11	22.00	1.227	0.575	0.706
	Band IV/RMC 12.2Kbps	Back Side	1413	21.11	22.00	1.227	0.566	0.695
	Band IV/RMC 12.2Kbps	Left Side	1413	21.11	22.00	1.227	0.115	0.141
	Band IV/RMC 12.2Kbps	Right Side	1413	21.11	22.00	1.227	0.028	0.034
	Band IV/RMC 12.2Kbps	Top Side	1413	21.11	22.00	1.227	0.810	0.994
	Band IV/RMC 12.2Kbps	Top Side	1312	21.10	22.00	1.230	0.765	0.941
	Band IV/RMC 12.2Kbps	Top Side	1513	20.99	22.00	1.262	0.912	1.151
Ant. 0 (Full Power)								
	Band IV/RMC 12.2Kbps	Front Side	1413	22.11	23.00	1.227	0.516	0.633
35#	Band IV/RMC 12.2Kbps	Back Side	1413	22.11	23.00	1.227	0.625	0.767
	Band IV/RMC 12.2Kbps	Left Side	1413	22.11	23.00	1.227	0.197	0.242
	Band IV/RMC 12.2Kbps	Right Side	1413	22.11	23.00	1.227	0.294	0.361
36#	Band IV/RMC 12.2Kbps	Bottom Side	1413	22.11	23.00	1.227	0.952	1.169
	Band IV/RMC 12.2Kbps	Bottom Side	1312	22.10	23.00	1.230	0.937	1.153
	Band IV/RMC 12.2Kbps	Bottom Side	1513	21.99	23.00	1.262	0.877	1.107
Ant. 1 (Full Power)								
	Band V/RMC 12.2Kbps	Front Side	4182	23.52	24.50	1.253	0.219	0.274



REPORT No. : SZ21040341S01

37#	Band V/RMC 12.2Kbps	Back Side	4182	23.52	24.50	1.253	0.237	0.297
	Band V/RMC 12.2Kbps	Left Side	4182	23.52	24.50	1.253	0.118	0.148
	Band V/RMC 12.2Kbps	Right Side	4182	23.52	24.50	1.253	0.121	0.152
	Band V/RMC 12.2Kbps	Top Side	4182	23.52	24.50	1.253	0.185	0.232
Ant. 0 (Full Power)								
	Band V/RMC 12.2Kbps	Front Side	4182	23.52	24.50	1.253	0.134	0.168
	Band V/RMC 12.2Kbps	Back Side	4182	23.52	24.50	1.253	0.173	0.217
	Band V/RMC 12.2Kbps	Left Side	4182	23.52	24.50	1.253	0.068	0.085
	Band V/RMC 12.2Kbps	Right Side	4182	23.52	24.50	1.253	0.152	0.190
	Band V/RMC 12.2Kbps	Bottom Side	4182	23.52	24.50	1.253	0.154	0.193

➤ **LTE QPSK Body SAR**

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Ant 1(Reduction Power)								
	LTE Band 2/1RB#0 20M	Front Side	18900	20.23	21.00	1.194	0.448	0.535
	LTE Band 2/1RB#0 20M	Back Side	18900	20.23	21.00	1.194	0.613	0.732
	LTE Band 2/1RB#0 20M	Left Side	18900	20.23	21.00	1.194	0.095	0.113
	LTE Band 2/1RB#0 20M	Right Side	18900	20.23	21.00	1.194	0.066	0.079
	LTE Band 2/1RB#0 20M	Top Side	18900	20.23	21.00	1.194	0.948	1.132
	LTE Band 2/1RB#0 20M	Top Side	18700	20.22	21.00	1.197	0.903	1.081
	LTE Band 2/1RB#0 20M	Top Side	19100	20.18	21.00	1.208	0.979	1.182
	LTE Band 2/50RB#0 20M	Front Side	18900	19.26	20.00	1.186	0.420	0.498
38#	LTE Band 2/50RB#0 20M	Back Side	18900	19.26	20.00	1.186	0.621	0.736
	LTE Band 2/50RB#0 20M	Left Side	18900	19.26	20.00	1.186	0.975	1.156
	LTE Band 2/50RB#0 20M	Right Side	18900	19.26	20.00	1.186	0.062	0.073
39#	LTE Band 2/50RB#0 20M	Top Side	18900	19.26	20.00	1.186	1.010	1.198
	LTE Band 2/50RB#0 20M	Top Side	18700	19.20	20.00	1.202	0.980	1.178
	LTE Band 2/50RB#0 20M	Top Side	19100	19.24	20.00	1.191	1.000	1.191
	LTE Band 2/100RB#0 20M	Top Side	18900	18.65	20.00	1.365	0.596	0.813
Ant 0(Full Power)								
	LTE Band 2/1RB#0 20M	Front Side	18900	22.73	23.50	1.194	0.195	0.233
	LTE Band 2/1RB#0 20M	Back Side	18900	22.73	23.50	1.194	0.442	0.528
	LTE Band 2/1RB#0 20M	Left Side	18900	22.73	23.50	1.194	0.066	0.079
	LTE Band 2/1RB#0 20M	Right Side	18900	22.73	23.50	1.194	0.103	0.123
	LTE Band 2/1RB#0 20M	Bottom Side	18900	22.73	23.50	1.194	0.665	0.794



REPORT No. : SZ21040341S01

	LTE Band 2/50RB#0 20M	Front Side	18900	21.76	22.50	1.186	0.242	0.287
	LTE Band 2/50RB#0 20M	Back Side	18900	21.76	22.50	1.186	0.319	0.378
	LTE Band 2/50RB#0 20M	Left Side	18900	21.76	22.50	1.186	0.066	0.078
	LTE Band 2/50RB#0 20M	Right Side	18900	21.76	22.50	1.186	0.084	0.100
	LTE Band 2/50RB#0 20M	Bottom Side	18900	21.76	22.50	1.186	0.520	0.617
Ant. 1 For EN-DC/Simultaneous Transmission (Reduction Power)								
	LTE Band 2/1RB#0 20M	Front Side	18900	15.32	16.00	1.169	0.175	0.204
	LTE Band 2/1RB#0 20M	Back Side	18900	15.32	16.00	1.169	0.239	0.280
	LTE Band 2/1RB#0 20M	Left Side	18900	15.32	16.00	1.169	0.037	0.043
	LTE Band 2/1RB#0 20M	Right Side	18900	15.32	16.00	1.169	0.026	0.030
	LTE Band 2/1RB#0 20M	Top Side	18900	15.32	16.00	1.169	0.370	0.432
	LTE Band 2/50RB#0 20M	Front Side	18900	14.35	15.00	1.161	0.420	0.164
	LTE Band 2/50RB#0 20M	Back Side	18900	14.35	15.00	1.161	0.621	0.242
	LTE Band 2/50RB#0 20M	Left Side	18900	14.35	15.00	1.161	0.975	0.380
	LTE Band 2/50RB#0 20M	Right Side	18900	14.35	15.00	1.161	0.062	0.024
	LTE Band 2/50RB#0 20M	Top Side	18900	14.35	15.00	1.161	0.394	0.458
Ant 1(Reduction Power)								
	LTE Band 4/1RB#0 20M	Front Side	20175	20.96	22.00	1.271	0.389	0.494
	LTE Band 4/1RB#0 20M	Back Side	20175	20.96	22.00	1.271	0.445	0.565
	LTE Band 4/1RB#0 20M	Left Side	20175	20.96	22.00	1.271	0.104	0.132
	LTE Band 4/1RB#0 20M	Right Side	20175	20.96	22.00	1.271	0.026	0.033
	LTE Band 4/1RB#0 20M	Top Side	20175	20.96	22.00	1.271	0.685	0.870
	LTE Band 4/1RB#0 20M	Top Side	20050	20.90	22.00	1.288	0.660	0.850
	LTE Band 4/1RB#0 20M	Top Side	20300	20.93	22.00	1.279	0.792	1.013
	LTE Band 4/50RB#0 20M	Front Side	20175	19.92	21.00	1.282	0.382	0.490
	LTE Band 4/50RB#0 20M	Back Side	20175	19.92	21.00	1.282	0.441	0.566
	LTE Band 4/50RB#0 20M	Left Side	20175	19.92	21.00	1.282	0.096	0.123
	LTE Band 4/50RB#0 20M	Right Side	20175	19.92	21.00	1.282	0.025	0.032
	LTE Band 4/50RB#0 20M	Top Side	20175	19.92	21.00	1.282	0.710	0.910
	LTE Band 4/50RB#0 20M	Top Side	20050	19.83	21.00	1.309	0.698	0.914
	LTE Band 4/50RB#0 20M	Top Side	20300	19.86	21.00	1.300	0.735	0.956
	LTE Band 4/100RB#0 20M	Top Side	20175	19.62	21.00	1.374	0.650	0.893
Ant 0(Full Power)								
	LTE Band 4/1RB#0 20M	Front Side	20175	22.46	23.50	1.271	0.485	0.616
40#	LTE Band 4/1RB#0 20M	Back Side	20175	22.46	23.50	1.271	0.585	0.743
	LTE Band 4/1RB#0 20M	Left Side	20175	22.46	23.50	1.271	0.195	0.248



	LTE Band 4/1RB#0 20M	Right Side	20175	22.46	23.50	1.271	0.279	0.354
	LTE Band 4/1RB#0 20M	Bottom Side	20175	22.46	23.50	1.271	0.935	1.188
	LTE Band 4/1RB#0 20M	Bottom Side	20050	22.40	23.50	1.288	0.914	1.177
41#	LTE Band 4/1RB#0 20M	Bottom Side	20300	22.43	23.50	1.279	0.932	1.192
	LTE Band 4/50RB#0 20M	Front Side	20175	21.42	22.50	1.282	0.435	0.558
	LTE Band 4/50RB#0 20M	Back Side	20175	21.42	22.50	1.282	0.537	0.689
	LTE Band 4/50RB#0 20M	Left Side	20175	21.42	22.50	1.282	0.171	0.219
	LTE Band 4/50RB#0 20M	Right Side	20175	21.42	22.50	1.282	0.277	0.355
	LTE Band 4/50RB#0 20M	Bottom Side	20175	21.42	22.50	1.282	0.846	1.085
	LTE Band 4/50RB#0 20M	Bottom Side	20050	21.33	22.50	1.309	0.850	1.113
	LTE Band 4/50RB#0 20M	Bottom Side	20300	21.36	22.50	1.300	0.836	1.087
	LTE Band 4/100RB#0 20M	Bottom Side	20175	21.12	22.50	1.374	0.611	0.840
Ant 1(Full Power)								
	LTE Band 5/1RB#0 10M	Front Side	20525	23.41	24.50	1.285	0.188	0.242
42#	LTE Band 5/1RB#0 10M	Back Side	20525	23.41	24.50	1.285	0.257	0.330
	LTE Band 5/1RB#0 10M	Left Side	20525	23.41	24.50	1.285	0.140	0.180
	LTE Band 5/1RB#0 10M	Right Side	20525	23.41	24.50	1.285	0.126	0.162
	LTE Band 5/1RB#0 10M	Top Side	20525	23.41	24.50	1.285	0.174	0.224
	LTE Band 5/25RB#0 10M	Front Side	20525	22.40	23.50	1.288	0.153	0.197
	LTE Band 5/25RB#0 10M	Back Side	20525	22.40	23.50	1.288	0.185	0.238
	LTE Band 5/25RB#0 10M	Left Side	20525	22.40	23.50	1.288	0.120	0.155
	LTE Band 5/25RB#0 10M	Right Side	20525	22.40	23.50	1.288	0.106	0.137
	LTE Band 5/25RB#0 10M	Top Side	20525	22.40	23.50	1.288	0.139	0.179
Ant 0(Full Power)								
	LTE Band 5/1RB#0 10M	Front Side	20525	23.41	24.50	1.285	0.135	0.174
	LTE Band 5/1RB#0 10M	Back Side	20525	23.41	24.50	1.285	0.176	0.226
	LTE Band 5/1RB#0 10M	Left Side	20525	23.41	24.50	1.285	0.110	0.141
	LTE Band 5/1RB#0 10M	Right Side	20525	23.41	24.50	1.285	0.037	0.048
	LTE Band 5/1RB#0 10M	Bottom Side	20525	23.41	24.50	1.285	0.132	0.170
	LTE Band 5/25RB#0 10M	Front Side	20525	22.40	23.50	1.288	0.114	0.147
	LTE Band 5/25RB#0 10M	Back Side	20525	22.40	23.50	1.288	0.162	0.209
	LTE Band 5/25RB#0 10M	Left Side	20525	22.40	23.50	1.288	0.091	0.117
	LTE Band 5/25RB#0 10M	Right Side	20525	22.40	23.50	1.288	0.031	0.039
	LTE Band 5/25RB#0 10M	Bottom Side	20525	22.40	23.50	1.288	0.121	0.156
Ant 1(Reduction Power)								



	LTE Band 7/1RB#0 20M	Front Side	21100	20.21	21.20	1.256	0.265	0.333
	LTE Band 7/1RB#0 20M	Back Side	21100	20.21	21.20	1.256	0.684	0.859
	LTE Band 7/1RB#0 20M	Left Side	21100	20.21	21.20	1.256	0.270	0.339
	LTE Band 7/1RB#0 20M	Right Side	21100	20.21	21.20	1.256	0.017	0.021
	LTE Band 7/1RB#0 20M	Top Side	21100	20.21	21.20	1.256	0.826	1.037
	LTE Band 7/1RB#0 20M	Top Side	20850	20.15	21.20	1.274	0.765	0.974
43#	LTE Band 7/1RB#0 20M	Top Side	21350	20.04	21.20	1.306	0.847	1.106
	LTE Band 7/50RB#0 20M	Front Side	21100	19.37	20.20	1.211	0.318	0.385
	LTE Band 7/50RB#0 20M	Back Side	21100	19.37	20.20	1.211	0.489	0.592
	LTE Band 7/50RB#0 20M	Left Side	21100	19.37	20.20	1.211	0.274	0.332
	LTE Band 7/50RB#0 20M	Right Side	21100	19.37	20.20	1.211	0.016	0.019
	LTE Band 7/50RB#0 20M	Top Side	21100	19.37	20.20	1.211	0.832	1.007
	LTE Band 7/50RB#0 20M	Top Side	20850	19.35	20.20	1.216	0.789	0.960
	LTE Band 7/50RB#0 20M	Top Side	21350	19.31	20.20	1.227	0.816	1.002
	LTE Band 7/100RB#0 20M	Top Side	21100	19.02	20.20	1.312	0.694	0.911
Ant 0(Full Power)								
	LTE Band 7/1RB#0 20M	Front Side	21100	22.71	23.70	1.256	0.517	0.649
44#	LTE Band 7/1RB#0 20M	Back Side	21100	22.71	23.70	1.256	0.750	0.942
	LTE Band 7/1RB#0 20M	Left Side	21100	22.71	23.70	1.256	0.087	0.110
	LTE Band 7/1RB#0 20M	Right Side	21100	22.71	23.70	1.256	0.322	0.404
	LTE Band 7/1RB#0 20M	Bottom Side	21100	22.71	23.70	1.256	0.259	0.325
	LTE Band 7/1RB#0 20M	Back Side	20850	22.65	23.70	1.274	0.611	0.778
	LTE Band 7/1RB#0 20M	Back Side	21350	22.54	23.70	1.306	0.628	0.820
	LTE Band 7/50RB#0 20M	Front Side	21100	21.87	22.70	1.211	0.416	0.504
	LTE Band 7/50RB#0 20M	Back Side	21100	21.87	22.70	1.211	0.544	0.659
	LTE Band 7/50RB#0 20M	Left Side	21100	21.87	22.70	1.211	0.068	0.082
	LTE Band 7/50RB#0 20M	Right Side	21100	21.87	22.70	1.211	0.258	0.312
	LTE Band 7/50RB#0 20M	Bottom Side	21100	21.87	22.70	1.211	0.219	0.265
	LTE Band 7/100RB#0 20M	Back Side	21100	21.52	22.70	1.312	0.571	0.749
Ant 1(Reduction Power)								
	LTE Band 7C/1RB#0 20M	Top Side	21152	20.32	21.20	1.225	0.800	0.980
Ant. 2 For EN-DC/Simultaneous Transmission (Full Power)								
	LTE Band 7/1RB#0 20M	Front Side	21100	22.71	23.70	1.256	0.074	0.092
	LTE Band 7/1RB#0 20M	Back Side	21100	22.71	23.70	1.256	0.190	0.238
	LTE Band 7/1RB#0 20M	Left Side	21100	22.71	23.70	1.256	0.075	0.094
	LTE Band 7/1RB#0 20M	Right Side	21100	22.71	23.70	1.256	0.005	0.006



REPORT No. : SZ21040341S01

	LTE Band 7/1RB#0 20M	Top Side	21100	22.71	23.70	1.256	0.229	0.288
	LTE Band 7/50RB#0 20M	Front Side	21100	21.67	22.70	1.268	0.088	0.112
	LTE Band 7/50RB#0 20M	Back Side	21100	21.67	22.70	1.268	0.136	0.172
	LTE Band 7/50RB#0 20M	Left Side	21100	21.67	22.70	1.268	0.076	0.096
	LTE Band 7/50RB#0 20M	Right Side	21100	21.67	22.70	1.268	0.004	0.006
	LTE Band 7/50RB#0 20M	Top Side	21100	21.67	22.70	1.268	0.231	0.293
Ant 1(Full Power)								
	LTE Band 12/1RB#0 10M	Front Side	23095	23.42	24.50	1.282	0.107	0.137
45#	LTE Band 12/1RB#0 10M	Back Side	23095	23.42	24.50	1.282	0.120	0.154
46#	LTE Band 12/1RB#0 10M	Left Side	23095	23.42	24.50	1.282	0.185	0.237
	LTE Band 12/1RB#0 10M	Right Side	23095	23.42	24.50	1.282	0.098	0.126
	LTE Band 12/1RB#0 10M	Top Side	23095	23.42	24.50	1.282	0.153	0.196
	LTE Band 12/25RB#0 10M	Front Side	23095	22.35	23.50	1.303	0.086	0.112
	LTE Band 12/25RB#0 10M	Back Side	23095	22.35	23.50	1.303	0.098	0.128
	LTE Band 12/25RB#0 10M	Left Side	23095	22.35	23.50	1.303	0.147	0.192
	LTE Band 12/25RB#0 10M	Right Side	23095	22.35	23.50	1.303	0.081	0.106
	LTE Band 12/25RB#0 10M	Top Side	23095	22.35	23.50	1.303	0.122	0.159
Ant 0(Full Power)								
	LTE Band 12/1RB#0 10M	Front Side	23095	23.42	24.50	1.282	0.052	0.067
	LTE Band 12/1RB#0 10M	Back Side	23095	23.42	24.50	1.282	0.060	0.076
	LTE Band 12/1RB#0 10M	Left Side	23095	23.42	24.50	1.282	0.030	0.039
	LTE Band 12/1RB#0 10M	Right Side	23095	23.42	24.50	1.282	0.071	0.091
	LTE Band 12/1RB#0 10M	Bottom Side	23095	23.42	24.50	1.282	0.049	0.063
	LTE Band 12/25RB#0 10M	Front Side	23095	22.35	23.50	1.303	0.044	0.058
	LTE Band 12/25RB#0 10M	Back Side	23095	22.35	23.50	1.303	0.049	0.064
	LTE Band 12/25RB#0 10M	Left Side	23095	22.35	23.50	1.303	0.021	0.028
	LTE Band 12/25RB#0 10M	Right Side	23095	22.35	23.50	1.303	0.058	0.075
	LTE Band 12/25RB#0 10M	Bottom Side	23095	22.35	23.50	1.303	0.042	0.055
Ant 1(Full Power)								
	LTE Band 26/1RB#0 15M	Front Side	26865	23.15	24.00	1.216	0.178	0.216
47#	LTE Band 26/1RB#0 15M	Back Side	26865	23.15	24.00	1.216	0.242	0.294
	LTE Band 26/1RB#0 15M	Left Side	26865	23.15	24.00	1.216	0.112	0.136
	LTE Band 26/1RB#0 15M	Right Side	26865	23.15	24.00	1.216	0.111	0.135
	LTE Band 26/1RB#0 15M	Top Side	26865	23.15	24.00	1.216	0.154	0.187



	LTE Band 26/36RB#0 15M	Front Side	26865	22.18	23.00	1.208	0.149	0.180
	LTE Band 26/36RB#0 15M	Back Side	26865	22.18	23.00	1.208	0.178	0.215
	LTE Band 26/36RB#0 15M	Left Side	26865	22.18	23.00	1.208	0.100	0.121
	LTE Band 26/36RB#0 15M	Right Side	26865	22.18	23.00	1.208	0.095	0.115
	LTE Band 26/36RB#0 15M	Top Side	26865	22.18	23.00	1.208	0.131	0.158
Ant 0(Full Power)								
	LTE Band 26/1RB#0 15M	Front Side	26865	23.15	24.00	1.216	0.111	0.135
	LTE Band 26/1RB#0 15M	Back Side	26865	23.15	24.00	1.216	0.144	0.175
	LTE Band 26/1RB#0 15M	Left Side	26865	23.15	24.00	1.216	0.104	0.126
	LTE Band 26/1RB#0 15M	Right Side	26865	23.15	24.00	1.216	0.038	0.046
	LTE Band 26/1RB#0 15M	Bottom Side	26865	23.15	24.00	1.216	0.117	0.142
	LTE Band 26/36RB#0 15M	Front Side	26865	22.18	23.00	1.208	0.099	0.119
	LTE Band 26/36RB#0 15M	Back Side	26865	22.18	23.00	1.208	0.139	0.168
	LTE Band 26/36RB#0 15M	Left Side	26865	22.18	23.00	1.208	0.087	0.106
	LTE Band 26/36RB#0 15M	Right Side	26865	22.18	23.00	1.208	0.031	0.037
	LTE Band 26/36RB#0 15M	Bottom Side	26865	22.18	23.00	1.208	0.110	0.133
Ant 1(Full Power)								
	LTE Band 38/1RB#0 20M	Front Side	38000	22.94	24.00	1.276	0.201	0.258
48#	LTE Band 38/1RB#0 20M	Back Side	38000	22.94	24.00	1.276	0.444	0.570
	LTE Band 38/1RB#0 20M	Left Side	38000	22.94	24.00	1.276	0.206	0.265
	LTE Band 38/1RB#0 20M	Right Side	38000	22.94	24.00	1.276	0.169	0.217
49#	LTE Band 38/1RB#0 20M	Top Side	38000	22.94	24.00	1.276	0.550	0.706
	LTE Band 38/50RB#0 20M	Front Side	38000	21.91	23.00	1.285	0.165	0.213
	LTE Band 38/50RB#0 20M	Back Side	38000	21.91	23.00	1.285	0.348	0.450
	LTE Band 38/50RB#0 20M	Left Side	38000	21.91	23.00	1.285	0.168	0.217
	LTE Band 38/50RB#0 20M	Right Side	38000	21.91	23.00	1.285	0.144	0.186
	LTE Band 38/50RB#0 20M	Top Side	38000	21.91	23.00	1.285	0.461	0.596
Ant 0(Full Power)								
	LTE Band 38/1RB#0 20M	Front Side	38000	22.94	24.00	1.276	0.200	0.257
	LTE Band 38/1RB#0 20M	Back Side	38000	22.94	24.00	1.276	0.277	0.356
	LTE Band 38/1RB#0 20M	Left Side	38000	22.94	24.00	1.276	0.023	0.029
	LTE Band 38/1RB#0 20M	Right Side	38000	22.94	24.00	1.276	0.122	0.157
	LTE Band 38/1RB#0 20M	Bottom Side	38000	22.94	24.00	1.276	0.099	0.127
	LTE Band 38/50RB#0 20M	Front Side	38000	21.91	23.00	1.285	0.159	0.206
	LTE Band 38/50RB#0 20M	Back Side	38000	21.91	23.00	1.285	0.225	0.291



	LTE Band 38/50RB#0 20M	Left Side	38000	21.91	23.00	1.285	0.019	0.024
	LTE Band 38/50RB#0 20M	Right Side	38000	21.91	23.00	1.285	0.099	0.128
	LTE Band 38/50RB#0 20M	Bottom Side	38000	21.91	23.00	1.285	0.092	0.119
Ant 1(Full Power)								
	LTE Band 38C/1RB#0 20M	Top Side	37901	22.75	24.00	1.334	0.513	0.688
Ant 1(Full Power)								
	LTE Band 41/1RB#0 20M	Front Side	40620	22.92	24.00	1.282	0.153	0.197
50#	LTE Band 41/1RB#0 20M	Back Side	40620	22.92	24.00	1.282	0.314	0.405
	LTE Band 41/1RB#0 20M	Left Side	40620	22.92	24.00	1.282	0.127	0.164
	LTE Band 41/1RB#0 20M	Right Side	40620	22.92	24.00	1.282	0.105	0.135
51#	LTE Band 41/1RB#0 20M	Top Side	40620	22.92	24.00	1.282	0.429	0.553
	LTE Band 41/50RB#0 20M	Front Side	40620	21.89	23.00	1.291	0.129	0.168
	LTE Band 41/50RB#0 20M	Back Side	40620	21.89	23.00	1.291	0.216	0.281
	LTE Band 41/50RB#0 20M	Left Side	40620	21.89	23.00	1.291	0.108	0.140
	LTE Band 41/50RB#0 20M	Right Side	40620	21.89	23.00	1.291	0.087	0.113
	LTE Band 41/50RB#0 20M	Top Side	40620	21.89	23.00	1.291	0.361	0.469
Ant 0(Full Power)								
	LTE Band 41/1RB#0 20M	Front Side	40620	22.92	24.00	1.282	0.194	0.250
	LTE Band 41/1RB#0 20M	Back Side	40620	22.92	24.00	1.282	0.270	0.348
	LTE Band 41/1RB#0 20M	Left Side	40620	22.92	24.00	1.282	0.021	0.028
	LTE Band 41/1RB#0 20M	Right Side	40620	22.92	24.00	1.282	0.120	0.155
	LTE Band 41/1RB#0 20M	Bottom Side	40620	22.92	24.00	1.282	0.096	0.124
Ant 1(Full Power)								
	LTE Band 41C/1RB#0 20M	Top Side	40521	22.83	24.00	1.309	0.388	0.511
	LTE Band 41/50RB#0 20M	Front Side	40620	21.89	23.00	1.291	0.157	0.204
	LTE Band 41/50RB#0 20M	Back Side	40620	21.89	23.00	1.291	0.222	0.288
	LTE Band 41/50RB#0 20M	Left Side	40620	21.89	23.00	1.291	0.019	0.025
	LTE Band 41/50RB#0 20M	Right Side	40620	21.89	23.00	1.291	0.097	0.126
	LTE Band 41/50RB#0 20M	Bottom Side	40620	21.89	23.00	1.291	0.090	0.117
Ant 4(Full Power)								
	LTE Band 66/1RB#0 20M	Front Side	132322	23.46	24.30	1.213	0.155	0.188
	LTE Band 66/1RB#0 20M	Back Side	132322	23.46	24.30	1.213	0.381	0.462
	LTE Band 66/1RB#0 20M	Left Side	132322	23.46	24.30	1.213	0.423	0.513
	LTE Band 66/1RB#0 20M	Top Side	132322	23.46	24.30	1.213	0.034	0.041
	LTE Band 66/50RB#0 20M	Front Side	132322	22.54	23.30	1.191	0.130	0.155



	LTE Band 66/50RB#0 20M	Back Side	132322	22.54	23.30	1.191	0.321	0.382
	LTE Band 66/50RB#0 20M	Left Side	132322	22.54	23.30	1.191	0.357	0.425
	LTE Band 66/50RB#0 20M	Top Side	132322	22.54	23.30	1.191	0.029	0.035
Ant 0(Full Power)								
	LTE Band 66/1RB#0 20M	Front Side	132322	23.46	24.30	1.213	0.267	0.324
52#	LTE Band 66/1RB#0 20M	Back Side	132322	23.46	24.30	1.213	0.619	0.751
	LTE Band 66/1RB#0 20M	Left Side	132322	23.46	24.30	1.213	0.069	0.084
	LTE Band 66/1RB#0 20M	Right Side	132322	23.46	24.30	1.213	0.017	0.021
	LTE Band 66/1RB#0 20M	Bottom Side	132322	23.46	24.30	1.213	0.843	1.023
53#	LTE Band 66/1RB#0 20M	Bottom Side	132072	23.35	24.30	1.245	0.867	1.079
	LTE Band 66/1RB#0 20M	Bottom Side	132572	23.41	24.30	1.227	0.761	0.934
	LTE Band 66/50RB#0 20M	Front Side	132322	22.54	23.30	1.191	0.211	0.251
	LTE Band 66/50RB#0 20M	Back Side	132322	22.54	23.30	1.191	0.543	0.647
	LTE Band 66/50RB#0 20M	Left Side	132322	22.54	23.30	1.191	0.056	0.067
	LTE Band 66/50RB#0 20M	Right Side	132322	22.54	23.30	1.191	0.015	0.018
	LTE Band 66/50RB#0 20M	Bottom Side	132322	22.54	23.30	1.191	0.438	0.522
	LTE Band 66/100RB#0 20M	Bottom Side	132322	22.13	23.20	1.279	0.597	0.764
Ant 0 For EN-DC/Simultaneous Transmission (Reduction Power)								
	LTE Band 66/1RB#0 20M	Front Side	132322	19.03	20.30	1.340	0.130	0.175
	LTE Band 66/1RB#0 20M	Back Side	132322	19.03	20.30	1.340	0.302	0.405
	LTE Band 66/1RB#0 20M	Left Side	132322	19.03	20.30	1.340	0.034	0.045
	LTE Band 66/1RB#0 20M	Right Side	132322	19.03	20.30	1.340	0.008	0.011
	LTE Band 66/1RB#0 20M	Bottom Side	132322	19.03	20.30	1.340	0.423	0.567
	LTE Band 66/50RB#0 20M	Front Side	132322	18.10	19.30	1.318	0.103	0.136
	LTE Band 66/50RB#0 20M	Back Side	132322	18.10	19.30	1.318	0.265	0.349
	LTE Band 66/50RB#0 20M	Left Side	132322	18.10	19.30	1.318	0.027	0.036
	LTE Band 66/50RB#0 20M	Right Side	132322	18.10	19.30	1.318	0.007	0.009
	LTE Band 66/50RB#0 20M	Bottom Side	132322	18.10	19.30	1.318	0.214	0.282



REPORT No. : SZ21040341S01

➤ **5G NR DFT-s-QPSK Body SAR**

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Ant 1(Full Power)								
	NR n5/1RB#1 20M	Front Side	167300	23.61	24.70	1.285	0.186	0.239
54#	NR n5/1RB#1 20M	Back Side	167300	23.61	24.70	1.285	0.246	0.316
	NR n5/1RB#1 20M	Left Side	167300	23.61	24.70	1.285	0.042	0.053
	NR n5/1RB#1 20M	Right Side	167300	23.61	24.70	1.285	0.034	0.043
	NR n5/1RB#1 20M	Top Side	167300	23.61	24.70	1.285	0.190	0.244
Ant 0(Full Power)								
	NR n5/50RB#1 20M	Front Side	167300	23.20	24.20	1.259	0.169	0.213
	NR n5/50RB#1 20M	Back Side	167300	23.20	24.20	1.259	0.183	0.230
	NR n5/50RB#1 20M	Left Side	167300	23.20	24.20	1.259	0.131	0.165
	NR n5/50RB#1 20M	Right Side	167300	23.20	24.20	1.259	0.117	0.147
	NR n5/50RB#1 20M	Top Side	167300	23.20	24.20	1.259	0.136	0.171
Ant 1(Reduction Power)								
	NR n5/1RB#1 20M	Front Side	167300	23.61	24.70	1.285	0.122	0.157
	NR n5/1RB#1 20M	Back Side	167300	23.61	24.70	1.285	0.171	0.220
	NR n5/1RB#1 20M	Left Side	167300	23.61	24.70	1.285	0.156	0.201
	NR n5/1RB#1 20M	Right Side	167300	23.61	24.70	1.285	0.058	0.074
	NR n5/1RB#1 20M	Bottom Side	167300	23.61	24.70	1.285	0.125	0.161
Ant 1(Full Power)								
	NR n5/50RB#1 20M	Front Side	167300	23.20	24.20	1.259	0.145	0.183
	NR n5/50RB#1 20M	Back Side	167300	23.20	24.20	1.259	0.203	0.256
	NR n5/50RB#1 20M	Left Side	167300	23.20	24.20	1.259	0.167	0.210
	NR n5/50RB#1 20M	Right Side	167300	23.20	24.20	1.259	0.060	0.076
	NR n5/50RB#1 20M	Bottom Side	167300	23.20	24.20	1.259	0.199	0.251
Ant 1(Reduction Power)								
	NR n7/1RB#1 20M	Front Side	507000	19.56	20.70	1.300	0.444	0.577
	NR n7/1RB#1 20M	Back Side	507000	19.56	20.70	1.300	0.413	0.537
	NR n7/1RB#1 20M	Left Side	507000	19.56	20.70	1.300	0.344	0.448
	NR n7/1RB#1 20M	Right Side	507000	19.56	20.70	1.300	0.021	0.028
	NR n7/1RB#1 20M	Top Side	507000	19.56	20.70	1.300	0.716	0.931
	NR n7/1RB#1 20M	Top Side	502000	19.50	20.70	1.318	0.697	0.919
55#	NR n7/1RB#1 20M	Top Side	512000	19.47	20.70	1.327	0.867	1.151
Ant 1(Reduction Power)								
	NR n7/50RB#1 20M	Front Side	507000	19.15	20.20	1.274	0.289	0.368
	NR n7/50RB#1 20M	Back Side	507000	19.15	20.20	1.274	0.434	0.553



	NR n7/50RB#1 20M	Left Side	507000	19.15	20.20	1.274	0.259	0.330
	NR n7/50RB#1 20M	Right Side	507000	19.15	20.20	1.274	0.025	0.032
	NR n7/50RB#1 20M	Top Side	507000	19.15	20.20	1.274	0.638	0.812
	NR n7/50RB#1 20M	Top Side	502000	18.97	20.20	1.327	0.612	0.812
	NR n7/50RB#1 20M	Top Side	512000	18.93	20.20	1.340	0.584	0.782
	NR n7/100RB#1 20M	Top Side	507000	18.48	20.20	1.486	0.618	0.918
Ant 0(Full Power)								
	NR n7/1RB#1 20M	Front Side	507000	22.56	23.70	1.300	0.616	0.801
	NR n7/1RB#1 20M	Back Side	507000	22.56	23.70	1.300	0.695	0.904
	NR n7/1RB#1 20M	Left Side	507000	22.56	23.70	1.300	0.057	0.075
	NR n7/1RB#1 20M	Right Side	507000	22.56	23.70	1.300	0.245	0.319
	NR n7/1RB#1 20M	Bottom Side	507000	22.56	23.70	1.300	0.351	0.456
	NR n7/1RB#1 20M	Back Side	502000	22.50	23.70	1.318	0.705	0.929
56#	NR n7/1RB#1 20M	Back Side	512000	22.47	23.70	1.327	0.787	1.045
	NR n7/50RB#1 20M	Front Side	507000	22.15	23.20	1.274	0.405	0.516
	NR n7/50RB#1 20M	Back Side	507000	22.15	23.20	1.274	0.698	0.889
	NR n7/50RB#1 20M	Left Side	507000	22.15	23.20	1.274	0.044	0.056
	NR n7/50RB#1 20M	Right Side	507000	22.15	23.20	1.274	0.236	0.301
	NR n7/50RB#1 20M	Bottom Side	507000	22.15	23.20	1.274	0.325	0.414
	NR n7/50RB#1 20M	Back Side	502000	21.97	23.20	1.327	0.619	0.821
	NR n7/50RB#1 20M	Back Side	512000	21.93	23.20	1.340	0.748	1.002
	NR n7/100RB#1 20M	Back Side	507000	21.48	23.20	1.486	0.571	0.848
Ant 1 For EN-DC/Simultaneous Transmission (Reduction Power)								
	NR n7/1RB#1 20M	Front Side	507000	16.06	17.20	1.300	0.146	0.190
	NR n7/1RB#1 20M	Back Side	507000	16.06	17.20	1.300	0.267	0.347
	NR n7/1RB#1 20M	Left Side	507000	16.06	17.20	1.300	0.167	0.217
	NR n7/1RB#1 20M	Right Side	507000	16.06	17.20	1.300	0.084	0.110
	NR n7/1RB#1 20M	Top Side	507000	16.06	17.20	1.300	0.440	0.572
	NR n7/50RB#1 20M	Front Side	507000	15.65	16.70	1.274	0.131	0.167
	NR n7/50RB#1 20M	Back Side	507000	15.65	16.70	1.274	0.247	0.315
	NR n7/50RB#1 20M	Left Side	507000	15.65	16.70	1.274	0.154	0.196
	NR n7/50RB#1 20M	Right Side	507000	15.65	16.70	1.274	0.070	0.089
	NR n7/50RB#1 20M	Top Side	507000	15.65	16.70	1.274	0.370	0.471
Ant 1(Reduction Power)								
	NR n38/1RB#1 40M	Front Side	519000	20.54	21.20	1.164	0.297	0.345
	NR n38/1RB#1 40M	Back Side	519000	20.54	21.20	1.164	0.455	0.530



REPORT No. : SZ21040341S01

	NR n38/1RB#1 40M	Left Side	519000	20.54	21.20	1.164	0.330	0.384
	NR n38/1RB#1 40M	Right Side	519000	20.54	21.20	1.164	0.020	0.024
	NR n38/1RB#1 40M	Top Side	519000	20.54	21.20	1.164	0.734	0.854
	NR n38/1RB#1 40M	Top Side	516000	20.45	21.20	1.189	0.865	1.028
	NR n38/1RB#1 40M	Top Side	522000	20.36	21.20	1.213	0.683	0.829
	NR n38/50RB#1 40M	Front Side	519000	19.50	20.20	1.175	0.310	0.364
	NR n38/50RB#1 40M	Back Side	519000	19.50	20.20	1.175	0.415	0.488
	NR n38/50RB#1 40M	Left Side	519000	19.50	20.20	1.175	0.327	0.384
	NR n38/50RB#1 40M	Right Side	519000	19.50	20.20	1.175	0.024	0.028
	NR n38/50RB#1 40M	Top Side	519000	19.50	20.20	1.175	0.619	0.727
	NR n38/50RB#1 40M	Top Side	516000	19.41	20.20	1.199	0.733	0.879
	NR n38/50RB#1 40M	Top Side	522000	19.43	20.20	1.194	0.380	0.453
	NR n38/100RB#1 40M	Top Side	519000	19.35	20.20	1.216	0.469	0.570
Ant 0(Full Power)								
	NR n38/1RB#1 40M	Front Side	519000	23.54	24.20	1.164	0.698	0.812
	NR n38/1RB#1 40M	Back Side	519000	23.54	24.20	1.164	0.812	0.945
	NR n38/1RB#1 40M	Left Side	519000	23.54	24.20	1.164	0.082	0.096
	NR n38/1RB#1 40M	Right Side	519000	23.54	24.20	1.164	0.283	0.329
	NR n38/1RB#1 40M	Bottom Side	519000	23.54	24.20	1.164	0.295	0.343
	NR n38/1RB#1 40M	Back Side	516000	23.45	24.20	1.189	0.827	0.983
57#	NR n38/1RB#1 40M	Back Side	522000	23.36	24.20	1.213	0.882	1.070
	NR n38/50RB#1 40M	Front Side	519000	22.50	23.20	1.175	0.460	0.540
	NR n38/50RB#1 40M	Back Side	519000	22.50	23.20	1.175	0.529	0.622
	NR n38/50RB#1 40M	Left Side	519000	22.50	23.20	1.175	0.056	0.066
	NR n38/50RB#1 40M	Right Side	519000	22.50	23.20	1.175	0.291	0.342
	NR n38/50RB#1 40M	Bottom Side	519000	22.50	23.20	1.175	0.509	0.598
	NR n38/50RB#1 40M	Back Side	516000	22.41	23.20	1.199	0.484	0.581
	NR n38/50RB#1 40M	Back Side	522000	22.43	23.20	1.194	0.636	0.759
	NR n38/100RB#1 40M	Back Side	519000	22.35	23.20	1.216	0.574	0.698
Ant 1(Reduction Power)								
	NR n41/1RB#1 100M	Front Side	518598	21.68	22.20	1.127	0.371	0.418
	NR n41/1RB#1 100M	Back Side	518598	21.68	22.20	1.127	0.508	0.573
	NR n41/1RB#1 100M	Left Side	518598	21.68	22.20	1.127	0.369	0.416
	NR n41/1RB#1 100M	Right Side	518598	21.68	22.20	1.127	0.029	0.033
	NR n41/1RB#1 100M	Top Side	518598	21.68	22.20	1.127	0.765	0.862
58#	NR n41/1RB#1 100M	Top Side	509202	21.37	22.20	1.211	0.904	1.094



REPORT No. : SZ21040341S01

	NR n41/1RB#1 100M	Top Side	513900	21.58	22.20	1.153	0.875	1.009
	NR n41/1RB#1 100M	Top Side	523300	21.53	22.20	1.167	0.885	1.033
	NR n41/1RB#1 100M	Top Side	528000	21.47	22.20	1.183	0.614	0.726
	NR n41/135RB#1 100M	Front Side	518598	21.48	22.20	1.180	0.141	0.167
	NR n41/135RB#1 100M	Back Side	518598	21.48	22.20	1.180	0.188	0.222
	NR n41/135RB#1 100M	Left Side	518598	21.48	22.20	1.180	0.177	0.209
	NR n41/135RB#1 100M	Right Side	518598	21.48	22.20	1.180	0.039	0.046
	NR n41/135RB#1 100M	Top Side	518598	21.48	22.20	1.180	0.316	0.373
	NR n41/270RB#1 100M	Top Side	518598	20.50	22.20	1.479	0.430	0.636
Ant 0(Full Power)								
	NR n41/1RB#1 100M	Front Side	518598	23.68	24.20	1.127	0.671	0.756
	NR n41/1RB#1 100M	Back Side	518598	23.68	24.20	1.127	0.774	0.872
	NR n41/1RB#1 100M	Left Side	518598	23.68	24.20	1.127	0.078	0.088
	NR n41/1RB#1 100M	Right Side	518598	23.68	24.20	1.127	0.259	0.292
	NR n41/1RB#1 100M	Bottom Side	518598	23.68	24.20	1.127	0.638	0.719
	NR n41/1RB#1 100M	Back Side	509202	23.37	24.20	1.211	0.774	0.937
59#	NR n41/1RB#1 100M	Back Side	513900	23.58	24.20	1.153	0.829	0.956
	NR n41/1RB#1 100M	Back Side	523300	23.53	24.20	1.167	0.681	0.795
	NR n41/1RB#1 100M	Back Side	528000	23.47	24.20	1.183	0.770	0.911
	NR n41/135RB#1 100M	Front Side	518598	23.48	24.20	1.180	0.195	0.230
	NR n41/135RB#1 100M	Back Side	518598	23.48	24.20	1.180	0.169	0.199
	NR n41/135RB#1 100M	Left Side	518598	23.48	24.20	1.180	0.051	0.060
	NR n41/135RB#1 100M	Right Side	518598	23.48	24.20	1.180	0.109	0.129
	NR n41/135RB#1 100M	Bottom Side	518598	23.48	24.20	1.180	0.255	0.301
	NR n41/270RB#1 100M	Back Side	518598	22.50	24.20	1.479	0.468	0.692
Ant 1 For EN-DC/Simultaneous Transmission (Reduction Power)								
	NR n41/1RB#1 100M	Front Side	518598	19.18	20.20	1.265	0.167	0.211
	NR n41/1RB#1 100M	Back Side	518598	19.18	20.20	1.265	0.267	0.338
	NR n41/1RB#1 100M	Left Side	518598	19.18	20.20	1.265	0.318	0.402
	NR n41/1RB#1 100M	Right Side	518598	19.18	20.20	1.265	0.012	0.015
	NR n41/1RB#1 100M	Top Side	518598	19.18	20.20	1.265	0.422	0.534
	NR n41/135RB#1 100M	Front Side	518598	18.98	20.20	1.324	0.187	0.248
	NR n41/135RB#1 100M	Back Side	518598	18.98	20.20	1.324	0.225	0.298
	NR n41/135RB#1 100M	Left Side	518598	18.98	20.20	1.324	0.303	0.401
	NR n41/135RB#1 100M	Right Side	518598	18.98	20.20	1.324	0.017	0.023



REPORT No. : SZ21040341S01

	NR n41/135RB#1 100M	Top Side	518598	18.98	20.20	1.324	0.221	0.293
Ant 4(Full Power)								
	NR n66/1RB#1 20M	Front Side	349000	23.14	24.20	1.276	0.143	0.183
	NR n66/1RB#1 20M	Back Side	349000	23.14	24.20	1.276	0.332	0.424
	NR n66/1RB#1 20M	Left Side	349000	23.14	24.20	1.276	0.395	0.504
	NR n66/1RB#1 20M	Right Side	349000	23.14	24.20	1.276	0.039	0.050
	NR n66/1RB#1 20M	Top Side	349000	23.14	24.20	1.276	0.039	0.050
	NR n66/50RB#1 20M	Front Side	349000	23.12	24.20	1.282	0.092	0.118
	NR n66/50RB#1 20M	Back Side	349000	23.12	24.20	1.282	0.233	0.299
	NR n66/50RB#1 20M	Left Side	349000	23.12	24.20	1.282	0.287	0.368
	NR n66/50RB#1 20M	Right Side	349000	23.12	24.20	1.282	0.010	0.013
	NR n66/50RB#1 20M	Top Side	349000	23.12	24.20	1.282	0.032	0.041
Ant 0(Full Power)								
	NR n66/1RB#1 20M	Front Side	349000	23.14	24.20	1.276	0.438	0.559
60#	NR n66/1RB#1 20M	Back Side	349000	23.14	24.20	1.276	0.602	0.768
	NR n66/1RB#1 20M	Left Side	349000	23.14	24.20	1.276	0.094	0.120
	NR n66/1RB#1 20M	Right Side	349000	23.14	24.20	1.276	0.151	0.193
61#	NR n66/1RB#1 20M	Bottom Side	349000	23.14	24.20	1.276	0.854	1.090
	NR n66/1RB#1 20M	Bottom Side	344000	23.00	24.20	1.318	0.626	0.825
	NR n66/1RB#1 20M	Bottom Side	354000	22.89	24.20	1.352	0.545	0.737
	NR n66/50RB#1 20M	Front Side	349000	23.12	24.20	1.282	0.358	0.460
	NR n66/50RB#1 20M	Back Side	349000	23.12	24.20	1.282	0.451	0.578
	NR n66/50RB#1 20M	Left Side	349000	23.12	24.20	1.282	0.070	0.089
	NR n66/50RB#1 20M	Right Side	349000	23.12	24.20	1.282	0.129	0.165
	NR n66/50RB#1 20M	Bottom Side	349000	23.12	24.20	1.282	0.483	0.619
	NR n66/100RB#1 20M	Bottom Side	349000	23.01	24.20	1.315	0.513	0.675

➤ **WLAN Body SAR**

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Ant 6(Full Power)								
	WLAN2.4GHz/802.11b	Front Side	6	16.50	18.50	1.585	0.018	0.029
	WLAN2.4GHz/802.11b	Back Side	6	16.50	18.50	1.585	0.025	0.039
	WLAN2.4GHz/802.11b	Right Side	6	16.50	18.50	1.585	0.020	0.032
	WLAN2.4GHz/802.11b	Top Side	6	16.50	18.50	1.585	0.024	0.039
Ant 7(Full Power)								
	WLAN2.4GHz/802.11b	Front Side	6	14.63	16.50	1.538	0.040	0.062
62#	WLAN2.4GHz/802.11b	Back Side	6	14.63	16.50	1.538	0.073	0.112
	WLAN2.4GHz/802.11b	Left Side	6	14.63	16.50	1.538	0.045	0.069
	WLAN2.4GHz/802.11b	Top Side	6	14.63	16.50	1.538	0.023	0.036
Ant 6(Full Power)								
	WLAN5.2GHz/802.11a	Front Side	44	16.22	18.00	1.507	0.159	0.239
	WLAN5.2GHz/802.11a	Back Side	44	16.22	18.00	1.507	0.322	0.485
Ant 7(Full Power)								
	WLAN5.2GHz/802.11a	Front Side	44	16.14	18.00	1.535	0.048	0.073
63#	WLAN5.2GHz/802.11a	Back Side	44	16.14	18.00	1.535	0.392	0.602
Ant 6(Full Power)								
	WLAN5.3GHz/802.11a	Front Side	60	16.51	18.50	1.581	0.184	0.291
	WLAN5.3GHz/802.11a	Back Side	60	16.51	18.50	1.581	0.370	0.585
Ant 7(Full Power)								
	WLAN5.3GHz/802.11a	Front Side	60	16.65	18.50	1.531	0.027	0.041
64#	WLAN5.3GHz/802.11a	Back Side	60	16.65	18.50	1.531	0.244	0.374
Ant 6(Full Power)								
	WLAN5.5GHz/802.11a	Front Side	120	17.57	19.50	1.560	0.399	0.622
65#	WLAN5.5GHz/802.11a	Back Side	120	17.57	19.50	1.560	0.433	0.675
Ant 7(Full Power)								
	WLAN5.5GHz/802.11a	Front Side	120	15.18	17.00	1.521	0.037	0.056
	WLAN5.5GHz/802.11a	Back Side	120	15.18	17.00	1.521	0.309	0.470
Ant 6(Full Power)								
	WLAN5.8GHz/802.11a	Front Side	157	17.45	19.00	1.429	0.150	0.214
	WLAN5.8GHz/802.11a	Back Side	157	17.45	19.00	1.429	0.310	0.443
	WLAN5.8GHz/802.11a	Right Side	157	17.45	19.00	1.429	0.135	0.193
	WLAN5.8GHz/802.11a	Top Side	157	17.45	19.00	1.429	0.255	0.364
Ant 7(Reduction Power)								
	WLAN5.8GHz/802.11a	Front Side	157	11.36	13.50	1.637	0.056	0.092



66#	WLAN5.8GHz/802.11a	Back Side	157	11.36	13.50	1.637	0.616	1.008
	WLAN5.8GHz/802.11a	Left Side	157	11.36	13.50	1.637	0.262	0.429
	WLAN5.8GHz/802.11a	Top Side	157	11.36	13.50	1.637	0.067	0.110
	WLAN5.8GHz/802.11a	Back Side	149	11.21	13.50	1.694	0.480	0.813
	WLAN5.8GHz/802.11a	Back Side	165	11.27	13.50	1.671	0.502	0.839

➤ **WLAN Body SAR for Simultaneous Transmission Evaluation**

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Ant 6(Reduction Power)								
	WLAN2.4GHz/802.11b	Front Side	6	9.16	11.00	1.528	0.018	0.028
	WLAN2.4GHz/802.11b	Back Side	6	9.16	11.00	1.528	0.025	0.037
	WLAN2.4GHz/802.11b	Right Side	6	9.16	11.00	1.528	0.020	0.031
	WLAN2.4GHz/802.11b	Top Side	6	9.16	11.00	1.528	0.024	0.037
Ant 7(Reduction Power)								
	WLAN2.4GHz/802.11b	Front Side	6	9.13	11.00	1.538	0.040	0.062
67#	WLAN2.4GHz/802.11b	Back Side	6	9.13	11.00	1.538	0.073	0.112
	WLAN2.4GHz/802.11b	Left Side	6	9.13	11.00	1.538	0.045	0.069
	WLAN2.4GHz/802.11b	Top Side	6	9.13	11.00	1.538	0.023	0.036
Ant 6(Reduction Power)								
	WLAN5.2GHz/802.11a	Front Side	44	9.30	11.00	1.480	0.025	0.037
	WLAN5.2GHz/802.11a	Back Side	44	9.30	11.00	1.480	0.051	0.075
Ant 7(Reduction Power)								
	WLAN5.2GHz/802.11a	Front Side	44	10.02	12.00	1.578	0.014	0.023
68#	WLAN5.2GHz/802.11a	Back Side	44	10.02	12.00	1.578	0.117	0.185
Ant 6(Reduction Power)								
	WLAN5.3GHz/802.11a	Front Side	60	8.62	10.50	1.542	0.026	0.040
	WLAN5.3GHz/802.11a	Back Side	60	8.62	10.50	1.542	0.052	0.081
Ant 7(Reduction Power)								
	WLAN5.3GHz/802.11a	Front Side	60	9.01	11.00	1.581	0.017	0.027
69#	WLAN5.3GHz/802.11a	Back Side	60	9.01	11.00	1.581	0.155	0.245
Ant 6(Reduction Power)								
	WLAN5.5GHz/802.11a	Front Side	120	7.07	9.00	1.560	0.032	0.050
	WLAN5.5GHz/802.11a	Back Side	120	7.07	9.00	1.560	0.035	0.054
Ant 7(Reduction Power)								
	WLAN5.5GHz/802.11a	Front Side	120	7.09	9.00	1.552	0.012	0.019
70#	WLAN5.5GHz/802.11a	Back Side	120	7.09	9.00	1.552	0.045	0.070
Ant 6(Reduction Power)								



	WLAN5.8GHz/802.11a	Front Side	157	9.02	11.00	1.578	0.029	0.045
	WLAN5.8GHz/802.11a	Back Side	157	9.02	11.00	1.578	0.059	0.094
	WLAN5.8GHz/802.11a	Right Side	157	9.02	11.00	1.578	0.026	0.041
	WLAN5.8GHz/802.11a	Top Side	157	9.02	11.00	1.578	0.049	0.077
Ant 7(Reduction Power)								
	WLAN5.8GHz/802.11a	Front Side	157	9.36	11.00	1.459	0.013	0.018
71#	WLAN5.8GHz/802.11a	Back Side	157	9.36	11.00	1.459	0.139	0.203
	WLAN5.8GHz/802.11a	Left Side	157	9.36	11.00	1.459	0.059	0.086
	WLAN5.8GHz/802.11a	Top Side	157	9.36	11.00	1.459	0.015	0.022

Note:

The WLAN Reported 1g SAR (W/kg) has been calculated together with the duty cycle scaling factor 1.0 for 2.4G WLAN and 5GHz WLAN.

➤ Bluetooth Body SAR

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Ant 6(Full Power)								
	Bluetooth/1Mbps	Front Side	39	10.62	13.50	1.941	0.016	0.033
72#	Bluetooth/1Mbps	Back Side	39	10.62	13.50	1.941	0.021	0.045
	Bluetooth/1Mbps	Right Side	39	10.62	13.50	1.941	0.017	0.037
	Bluetooth/1Mbps	Top Side	39	10.62	13.50	1.941	0.020	0.042
Ant 7(Full Power)								
	Bluetooth/1Mbps	Front Side	78	10.15	13.00	1.928	0.009	0.019
	Bluetooth/1Mbps	Back Side	78	10.15	13.00	1.928	0.017	0.035
	Bluetooth/1Mbps	Left Side	78	10.15	13.00	1.928	0.010	0.022
	Bluetooth/1Mbps	Top Side	78	10.15	13.00	1.928	0.005	0.011

Note: The Bluetooth Reported 1g SAR (W/kg) has been calculated together with the duty cycle scaling factor 1.085 for Ant.6 and 1.081 for Ant.7.

18.4. Repeated SAR Assessment

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

1. Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg;
2. When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
3. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
4. Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

➤ Repeated SAR

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
OR.	LTE Band 2/50RB#0 20M	Right Tilt	18700	15.32	16.00	1.169	1.020	1.193
1 st	LTE Band 2/50RB#0 20M	Right Tilt	18700	15.32	16.00	1.169	1.015	1.187
OR.	LTE Band 5/25RB#0 10M	Right Cheek	20600	21.32	22.50	1.312	0.841	1.104
1 st	LTE Band 5/25RB#0 10M	Right Cheek	20600	21.32	22.50	1.312	0.840	1.102
OR.	LTE Band 7/50RB#0 20M	Right Tilt	21350	15.31	16.20	1.227	0.819	1.005
1 st	LTE Band 7/50RB#0 20M	Right Tilt	21350	15.31	16.20	1.227	0.815	1.000
OR.	LTE Band 26/1RB#0 15M	Right Cheek	26965	22.58	23.50	1.236	0.846	1.046
1 st	LTE Band 26/1RB#0 15M	Right Cheek	26965	22.58	23.50	1.236	0.842	1.041
OR.	LTE Band 38/50RB#0 20M	Right Tilt	37850	20.31	21.50	1.315	0.816	1.080
1 st	LTE Band 38/50RB#0 20M	Right Tilt	37850	20.31	21.50	1.315	0.812	1.074
OR.	LTE Band 41/1RB#0 20M	Right Tilt	40185	20.83	22.00	1.309	0.820	1.080
1 st	LTE Band 41/1RB#0 20M	Right Tilt	40185	20.83	22.00	1.309	0.813	1.071



REPORT No. : SZ21040341S01

OR.	NR n7/1RB#1 20M	Right Tilt	512000	14.97	16.20	1.327	0.811	1.077
1 st	NR n7/1RB#1 20M	Right Tilt	512000	14.97	16.20	1.327	0.808	1.073
OR.	NR n41/1RB#1 100M	Right Tilt	523300	16.03	17.20	1.309	0.900	1.178
1 st	NR n41/1RB#1 100M	Right Tilt	523300	16.03	17.20	1.309	0.897	1.174
OR.	Band II/RMC 12.2Kbps	Top Side	9538	19.55	20.50	1.245	0.882	1.098
1 st	Band II/RMC 12.2Kbps	Top Side	9538	19.55	20.50	1.245	0.879	1.094
OR.	Band IV/RMC 12.2Kbps	Bottom Side	1413	22.11	23.00	1.227	0.952	1.169
1 st	Band IV/RMC 12.2Kbps	Bottom Side	1413	22.11	23.00	1.227	0.949	1.165
OR.	LTE Band 2/50RB#0 20M	Top Side	18900	19.26	20.00	1.186	1.010	1.198
1 st	LTE Band 2/50RB#0 20M	Top Side	18900	19.26	20.00	1.186	1.000	1.186
OR.	LTE Band 4/1RB#0 20M	Bottom Side	20300	22.43	23.50	1.279	0.932	1.192
1 st	LTE Band 4/1RB#0 20M	Bottom Side	20300	22.43	23.50	1.279	0.930	1.190
OR.	LTE Band 7/1RB#0 20M	Top Side	21350	20.04	21.20	1.306	0.847	1.106
1 st	LTE Band 7/1RB#0 20M	Top Side	21350	20.04	21.20	1.306	0.841	1.098
OR.	LTE Band 66/1RB#0 20M	Bottom Side	132072	23.35	24.30	1.245	0.867	1.079
1 st	LTE Band 66/1RB#0 20M	Bottom Side	132072	23.35	24.30	1.245	0.861	1.072
OR.	NR n7/1RB#1 20M	Top Side	512000	19.47	20.70	1.327	0.867	1.151
1 st	NR n7/1RB#1 20M	Top Side	512000	19.47	20.70	1.327	0.861	1.143
OR.	NR n38/1RB#1 40M	Back Side	522000	23.36	24.20	1.213	0.882	1.070
1 st	NR n38/1RB#1 40M	Back Side	522000	23.36	24.20	1.213	0.879	1.067
OR.	NR n41/1RB#1 100M	Top Side	509202	21.37	22.20	1.211	0.904	1.094
1 st	NR n41/1RB#1 100M	Top Side	509202	21.37	22.20	1.211	0.899	1.088
OR.	NR n66/1RB#1 20M	Bottom Side	349000	23.14	24.20	1.276	0.854	1.090
1 st	NR n66/1RB#1 20M	Bottom Side	349000	23.14	24.20	1.276	0.851	1.086



18.5. Extremity SAR Assessment

Guidance:

1. According to KDB 648747 D04v01r03 The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB Publication 865664 D01 to address interactive hand use exposure conditions.
2. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.
3. According to the user manual, the EUT diagonal size is greater than 16cm, therefore the 0mm extremity SAR of WLAN 5GHz is required. There are two types of antennas in this device, only the worst antenna was tested the extremity SAR in this report.
4. Test results as below:

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{10g} (W/kg)	Reported SAR _{10g} (W/kg)
Ant 7								
73#	WLAN5.2GHz/802.11a	Back Side	44	16.14	18.00	1.535	0.844	1.295
Ant 6								
74#	WLAN5.3GHz/802.11a	Back Side	60	16.51	18.50	1.581	0.485	0.767
Ant 6								
75#	WLAN5.5GHz/802.11a	Back Side	120	17.57	19.50	1.560	0.790	1.232

19. Simultaneous Transmission Evaluation

19.1. Simultaneous Transmission Consideration

Simultaneous transmission Condition	Head	Body-worn	Hotspot
WWAN (2/3/4G) + WLAN 2.4GHz(SISO)	Yes	Yes	Yes
WWAN (2/3/4G) + WLAN 5.2 GHz/5.3GHz/5.5GHz(SISO)	Yes	Yes	No
WWAN (2/3/4G) + WLAN 5.8 GHz(SISO)	Yes	Yes	Yes
WWAN (SA/NSA) + WLAN 2.4GHz(SISO)	Yes	Yes	Yes
WWAN (SA/NSA) + WLAN 5.2 GHz/5.3GHz/5.5GHz(SISO)	Yes	Yes	No
WWAN (SA/NSA) + WLAN 5.8 GHz(SISO)	Yes	Yes	Yes
WWAN (2/3/4G) + WLAN 2.4GHz(MIMO)	Yes	Yes	Yes
WWAN (2/3/4G) + WLAN 5.2 GHz/5.3GHz/5.5GHz(MIMO)	Yes	Yes	No
WWAN (2/3/4G) + WLAN 5.8 GHz(MIMO)	Yes	Yes	Yes
WWAN (SA/NSA) + WLAN 2.4GHz(MIMO)	Yes	Yes	Yes
WWAN (SA/NSA) + WLAN 5.2 GHz/5.3GHz/5.5GHz(MIMO)	Yes	Yes	No
WWAN (SA/NSA) + WLAN 5.8 GHz(MIMO)	Yes	Yes	Yes
WWAN (2/3/4G/SA/NSA) + Bluetooth(SISO)	No	Yes	Yes
WLAN 2.4GHz(SISO) + Bluetooth(SISO)	No	Yes	Yes
WLAN 5GHz(SISO) + Bluetooth(SISO)	No	Yes	Yes
WWAN (2/3/4G) + WLAN 2.4GHz (SISO) + Bluetooth(SISO)	No	Yes	Yes
WWAN (2/3/4G) + WLAN 5GHz (SISO) + Bluetooth(SISO)	No	Yes	Yes
WWAN (SA/NSA) + WLAN 2.4GHz (SISO) + Bluetooth(SISO)	No	Yes	Yes
WWAN (SA/NSA) + WLAN 5GHz (SISO) + Bluetooth(SISO)	No	Yes	Yes

Note:

- When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of the WWAN and WLAN transmitters. The "Portable Hotspot" feature on the handset was NOT activated, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal.
- The hotspot SAR result may overlap with the body-worn accessory SAR requirements, per KDB 941225 D06, the more conservative configurations can be considered, thus excluding some unnecessary body-worn accessory SAR tests.
- Per KDB 447498D01v06, simultaneous transmission SAR evaluation procedures is as followed:
Step 1: If sum of 1 g SAR < 1.6 W/kg, Simultaneous SAR measurement is not required.
Step 2: If sum of 1 g SAR > 1.6 W/kg, ratio of SAR to peak separation distance for pair of transmitters calculated.
Step 3: If the ratio of SAR to peak separation distance is ≤ 0.04 , Simultaneous SAR measurement is not required.



Step 4: If the ratio of SAR to peak separation distance is > 0.04 , Simultaneous SAR measurement is required and simultaneous transmission SAR value is calculated.

(The ratio is determined by: $(SAR1 + SAR2) \wedge 1.5/Ri \leq 0.04$,

Ri is the separation distance between the peak SAR locations for the antenna pair in mm.

4. WLAN 2.4G&5G MIMO SAR were combined standalone SAR of CH0 and CH1.
5. When this device transmits simultaneously at WWAN+WLAN MIMO mode, the co-location SAR of WWAN+WLAN (standalone SAR) would not be recorded in this report.
6. The standalone SAR of EN-DC and simultaneous transmission SAR of GSM/WCDMA/LTE/5G NR (SA/NSA) refers to the annex F of this report.



19.2. SPLSR Assessment and Analysis

➤ General Guidance

1. Per KDB 447498, When standalone SAR is measured, the peak location is determined by the x, y, z coordinates of the extrapolated and interpolated results reported by the zoom scan measurement, or area scan measurement when area scan based 1-g SAR estimation is applicable.
2. When standalone SAR is measured for both antennas in the pair, the peak location separation distance is computed by the square root of $[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates in the area scans or extrapolated peak SAR locations in the zoom scans, as appropriate.
3. The ratio is determined by $(SAR_1 + SAR_2)^{1.5}/R_i$, rounded to two decimal digits, and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

20. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	1/ κ ^(b)	1/ $\sqrt{3}$	1/ $\sqrt{6}$	1/ $\sqrt{2}$

Standard Uncertainty for Assumed Distribution

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) κ is the coverage factor

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.



Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System							
Probe Calibration	6.0	N	1	1	1	6.0	6.0
Axial Isotropy	4.7	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.6	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	1.0	R	1.732	1	1	0.6	0.6
Linearity	4.7	R	1.732	1	1	2.7	2.7
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6
Modulation Response	3.2	R	1.732	1	1	1.8	1.8
Readout Electronics	0.3	N	1	1	1	0.3	0.3
Response Time	0.0	R	1.732	1	1	0.0	0.0
Integration Time	2.6	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7
Probe Positioner	0.4	R	1.732	1	1	0.2	0.2
Probe Positioning	2.9	R	1.732	1	1	1.7	1.7
Max. SAR Eval.	2.0	R	1.732	1	1	1.2	1.2
Test Sample Related							
Device Positioning	3.0	N	1	1	1	3.0	3.0
Device Holder	3.6	N	1	1	1	0.089	0.089
Power Drift	5.0	R	1.732	1	1	2.9	2.9
Power Scaling	0.0	R	1.732	1	1	0.0	0.0
Phantom and Setup							
Phantom Uncertainty	6.1	R	1.732	1	1	3.5	3.5
SAR correction	0.0	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.2	N	1	0.78	0.71	0.1	0.1
Liquid Conductivity (target)	5.0	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.5	R	1.732	0.78	0.71	1.1	1.0
Temp. unc. - Conductivity	3.4	R	1.732	0.78	0.71	1.5	1.4
Liquid Permittivity Repeatability	0.15	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.0	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.5	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.83	R	1.732	0.23	0.26	0.1	0.1
Combined Std. Uncertainty						11.4%	11.4%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						22.9%	22.7%



Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System							
Probe Calibration	6.55	N	1	1	1	6.0	6.0
Axial Isotropy	4.7	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.6	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	2.0	R	1.732	1	1	1.2	1.2
Linearity	4.7	R	1.732	1	1	2.7	2.7
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6
Modulation Response	3.2	R	1.732	1	1	1.8	1.8
Readout Electronics	0.3	N	1	1	1	0.3	0.3
Response Time	0.0	R	1.732	1	1	0.0	0.0
Integration Time	2.6	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7
Probe Positioner	0.4	R	1.732	1	1	0.2	0.2
Probe Positioning	6.7	R	1.732	1	1	3.9	3.9
Max. SAR Eval.	4.0	R	1.732	1	1	2.3	2.3
Test Sample Related							
Device Positioning	3.0	N	1	1	1	3.0	3.0
Device Holder	3.6	N	1	1	1	0.089	0.089
Power Drift	5.0	R	1.732	1	1	2.9	2.9
Power Scaling	0.0	R	1.732	1	1	0.0	0.0
Phantom and Setup							
Phantom Uncertainty	6.1	R	1.732	1	1	3.8	3.8
SAR correction	0.0	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.2	N	1	0.78	0.71	0.1	0.1
Liquid Conductivity (target)	5.0	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.5	R	1.732	0.78	0.71	1.1	1.0
Temp. unc. - Conductivity	3.4	R	1.732	0.78	0.71	1.5	1.4
Liquid Permittivity Repeatability	0.15	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.0	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.5	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.83	R	1.732	0.23	0.26	0.1	0.1
Combined Std. Uncertainty						12.5%	12.5%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						25.1 %	25.1%



Annex A General Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China

3. Facilities and Accreditations

The FCC designation number is CN1192, the test firm registration number is 226174.

Note:

The main report is end here and the other Annex (B,C,D,E,F,G) will be submitted separately.

***** END OF MAIN REPORT *****