



Sensata
Technologies

ANTENNA ISOTROPIC PEAK GAIN PATTERN

TESLA GEN DELTA BLE SENSOR

Antenna Manufacturer:

*Sensata Technologies
Unit 11, Antrim Technology Park,
Antrim, Northern Ireland, BT41 1QS, UK*

Document #: JP20230601-1
Destination:
Reference:
Issue: 01
Date: 01/06/2023
ECN #:
Author: Jonathan Prétot
Approver: Emmanuel Marguet
Contributors:

Issue	Amendment History	Name of Author	Date
01	Initial release	Jonathan Prétot	01-06-2023

Author: (Name)	Author: (Signature)	Approver: (Name)	Approver: (Signature)	Date:
Jonathan Prétot RF Design & Development Support Technician		Emmanuel Marguet RF Design & Development Support Team Manager		



Antenna Isotropic Peak Gain Pattern TESLA GEN DELTA BLE 2.4GHz

DOCUMENT NUMBER:

JP20230601-1

ISSUE LEVEL:

01

Table of Contents

Table of Contents.....	2
i. ABBREVIATIONS / GLOSSARY.....	3
ii. SUPPORTING DOCUMENTS	3
iii. DOCUMENT HISTORY AND STORAGE	3
1. Introduction	4
2. Description.....	4
3. Antenna gain.....	5



Antenna Isotropic Peak Gain Pattern TESLA GEN DELTA BLE 2.4GHz

DOCUMENT NUMBER:

JP20230601-1

ISSUE LEVEL:

01

i. ABBREVIATIONS / GLOSSARY

TERM	EXPANSION/MEANING
<i>dBi</i>	Decibel Isotropic

ii. SUPPORTING DOCUMENTS

REFERENCE	ISSUE

iii. DOCUMENT HISTORY AND STORAGE

DOCUMENT NAME	LOCATION

1.Introduction

This document shows the antenna pattern and antenna gain of **TESLA GEN DELTA BLE 2.4GHz** transmitter.

2.Description

TESLA GEN DELTA BLE 2.4GHz

Specifications:

1. Antenna Type: PCB Trace Antenna
2. Antenna Brand: Sensata Technologies

Note: There is no external antenna, the antenna is part of the pcb layout

3. Antenna gain

Test equipment used:

Category	Mark	Type	Calibration due date
Anechoic Test Site	Sensata		
Spectrum analyser	ANRITSU	MS2830A	20/09/2023
Coaxial cable		RG214U 50 Ohm 11m	
Open Boundary Quad-Ridged Horns antenna	ETS Lindgren	3164-06	

Conditions:

The test is performed in anechoic test site. The Transmitter is placed on a rotating table in continuous learn emission (EMC).

Description of transmitter positioning:

All measurements are done in Anechoic Chamber at 3m with TX on table in 3 positions as follow:

Pos. $\vartheta=0$


Pos $\vartheta=90$

Pos. $\varphi=0$

Peak antenna gain: -3.8 dBi


Gain in dBi Position $\theta=0$ polarisations V, H and Module

TESLA GEN DELTA BLE 2.4GHz

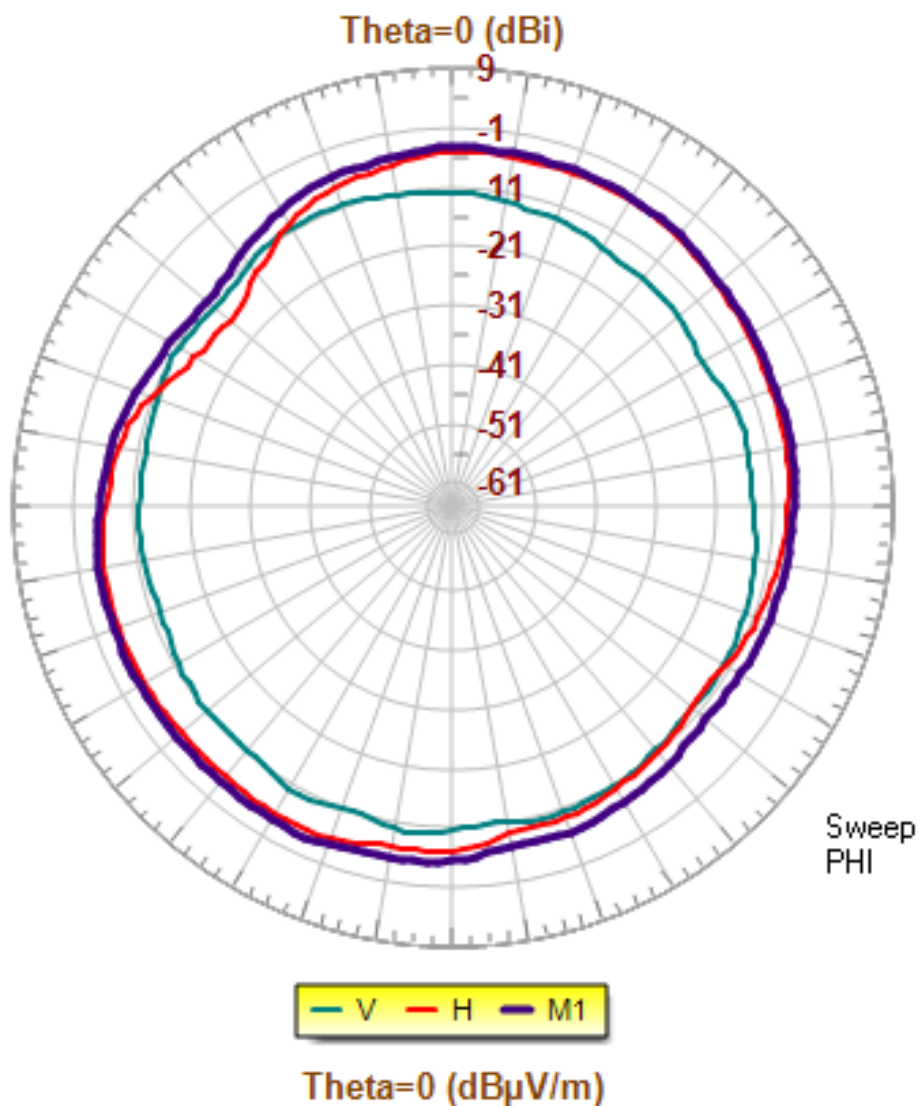

*Gain in dBi Position $\theta=90$ polarisations V, H and
Module*

TESLA GEN DELTA BLE 2.4GHz

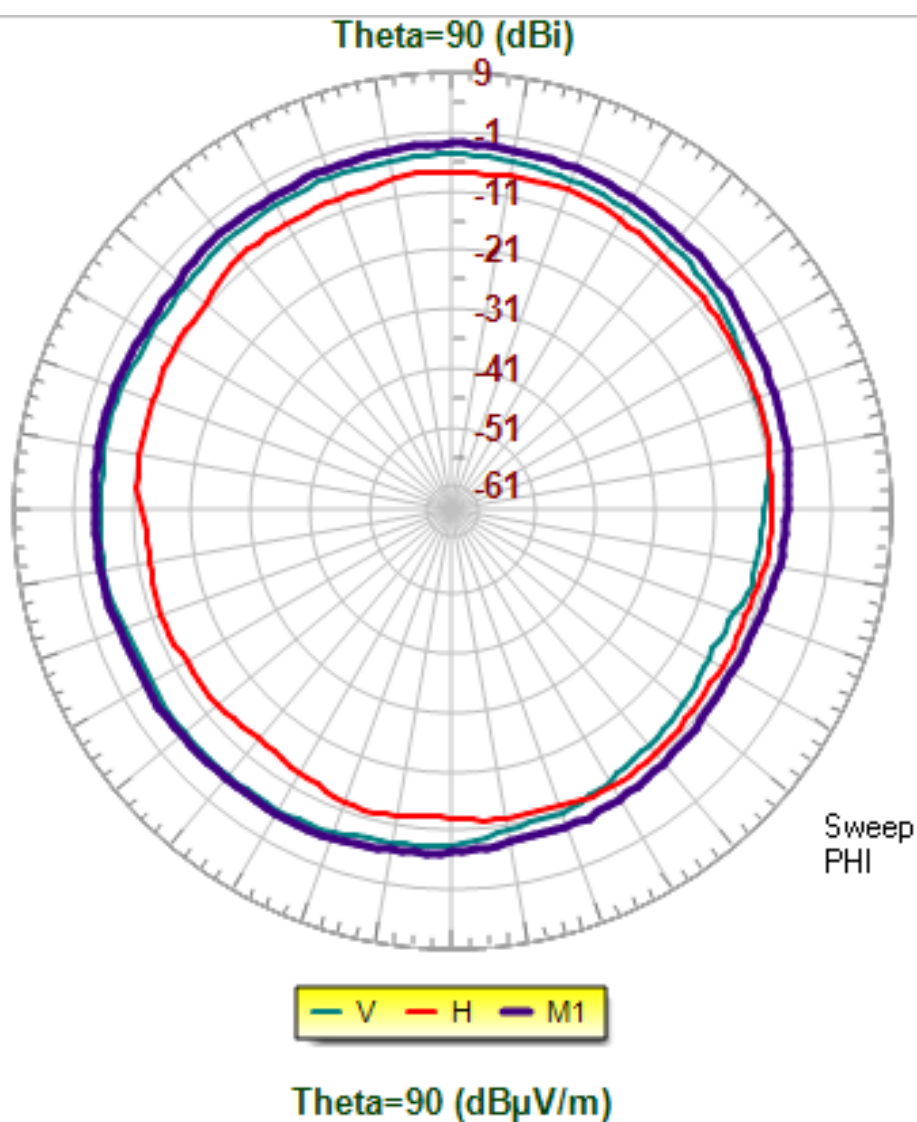

*Gain in dBi Position $\varphi=0$ polarisations V, H and
Module*

TESLA GEN DELTA BLE 2.4GHz

