



## TEST REPORT

**Application No.:** SZCR2105021070AT  
**Applicant:** Baicells Technologies Co., Ltd.  
**Address of Applicant:** 9-10F,1stBldg., No.81BeiqingRoad, Haidian District, Beijing, China  
**Manufacturer:** Baicells Technologies Co., Ltd.  
**Address of Manufacturer:** 9-10F,1stBldg., No.81BeiqingRoad, Haidian District, Beijing, China  
**Equipment Under Test (EUT):**  
**EUT Name:** LTE Base Station  
**Model No.:** pBS3101S  
**Trade Mark:** Baicells  
**FCC ID:** 2AG32PBS3101S  
**Standard(s) :** CBRSA-TS-9001-V1.0.0  
WINNF-TS-0122-V1.0  
FCC 47 CFR Part 96  
KDB 940660 D01  
**Date of Receipt:** 2021-04-30  
**Date of Test:** 2021-05-10 to 2021-05-18  
**Date of Issue:** 2021-05-22

<b>Test Result:</b>	<b>Pass*</b>
---------------------	--------------

\* In the configuration tested, the EUT complied with the standards specified above.

Keny Xu

Keny Xu  
EMC Laboratory Manager





Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2021-05-22		Original

Authorized for issue by:			
			
		Calvin Weng /Project Engineer	
			
		Eric Fu /Reviewer	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)  
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

## 2 Test Summary

Item	Standard	Test Case ID	Result
Domain Proxy Multi-Step registration	WINNF-TS-0122-V1.0.0	WINNF.FT.D.REG.2	Pass
Domain Proxy Single-Step registration for CBSD with CPI signed data	WINNF-TS-0122-V1.0.0	WINNF.FT.D.REG.6	Pass
Domain Proxy Missing Required parameters (responseCode 102)	WINNF-TS-0122-V1.0.0	WINNF.FT.D.REG.9	Pass
Domain Proxy Pending registration (responseCode 200)	WINNF-TS-0122-V1.0.0	WINNF.FT.D.REG.11	Pass
Domain Proxy Invalid parameters (responseCode 103)	WINNF-TS-0122-V1.0.0	WINNF.FT.D.REG.13	Pass
Domain Proxy Blacklisted CBSD (responseCode 101)	WINNF-TS-0122-V1.0.0	WINNF.FT.D.REG.15	Pass
Domain Proxy Unsupported SAS protocol version responseCode 100)	WINNF-TS-0122-V1.0.0	WINNF.FT.D.REG.17	Pass
Domain Proxy Group Error (responseCode 201)	WINNF-TS-0122-V1.0.0	WINNF.FT.D.REG.19	Pass
Unsuccessful Grant responseCode=400 (INTERFERENCE)	WINNF-TS-0122-V1.0.0	WINNF.FT.C.GRA.1	Pass
Unsuccessful Grant responseCode=401 (GRANT_CONFLICT)	WINNF-TS-0122-V1.0.0	WINNF.FT.C.GRA.2	Pass
Domain Proxy Heartbeat Success Case (first Heartbeat Response)	WINNF-TS-0122-V1.0.0	WINNF.FT.D.HBT.2	Pass
Heartbeat responseCode=105 (DEREGISTER)	WINNF-TS-0122-V1.0.0	WINNF.FT.C.HBT.3	Pass
Heartbeat responseCode=501 (SUSPENDED_GRANT) in First Heartbeat Response	WINNF-TS-0122-V1.0.0	WINNF.FT.C.HBT.5	Pass
Heartbeat responseCode=501 (SUSPENDED_GRANT) in Subsequent Heartbeat Response	WINNF-TS-0122-V1.0.0	WINNF.FT.C.HBT.6	Pass
Heartbeat responseCode=502 (UNSYNC_OP_PARAM)	WINNF-TS-0122-V1.0.0	WINNF.FT.C.HBT.7	Pass
Domain Proxy Heartbeat responseCode=500 (TEMINATED_GRANT)	WINNF-TS-0122-V1.0.0	WINNF.FT.D.HBT.8	Pass
Heartbeat Response Absent (First Heartbeat)	WINNF-TS-0122-V1.0.0	WINNF.FT.C.HBT.9	Pass
Heartbeat Response Absent (Subsequent Heartbeat)	WINNF-TS-0122-V1.0.0	WINNF.FT.C.HBT.10	Pass
Domain Proxy Registration Response contains measReportConfig	WINNF-TS-0122-V1.0.0	WINNF.FT.D.MES.2	Pass





**SGS-CSTC Standards Technical Services Co., Ltd.**  
**Shenzhen Branch**

Report No.: SZCR210502107001

Page: 4 of 47

Item	Standard	Test Case ID	Result
Grant Response contains measReportConfig	WINNF-TS-0122-V1.0.0	WINNF.FT.C.MES.3	Pass
Domain Proxy Heartbeat Response contains measReportConfig	WINNF-TS-0122-V1.0.0	WINNF.FT.D.MES.5	Pass
Domain Proxy Successful Relinquishment	WINNF-TS-0122-V1.0.0	WINNF.FT.D.RLQ.2	Pass
Domain Proxy Successful Deregistration	WINNF-TS-0122-V1.0.0	WINNF.FT.D.DRG.2	Pass
Successful TLS connection between UUT and SAS Test Harness	WINNF-TS-0122-V1.0.0	WINNF.FT.C.SCS.1	Pass
TLS failure due to revoked certificate	WINNF-TS-0122-V1.0.0	WINNF.FT.C.SCS.2	Pass
TLS failure due to expired server certificate	WINNF-TS-0122-V1.0.0	WINNF.FT.C.SCS.3	Pass
TLS failure when SAS Test Harness certificate is issue by unknown CA	WINNF-TS-0122-V1.0.0	WINNF.FT.C.SCS.4	Pass
TLS failure when certificate at the SAS Test Harness is corrupted	WINNF-TS-0122-V1.0.0	WINNF.FT.C.SCS.5	Pass
UUT RF Transmit Power Measurement	WINNF-TS-0122-V1.0.0	WINNF.PT.C.HBT.1	Pass
SAS Version: 1.0.0.3			

The UUT is a CBSD with Domain Proxy. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**Test standards:**

**CBRSA-TS-9001-V1.0.0**

CBRS Alliance Certification Test Plan

**WINNF-TS-0122-V1.0.0**

Test and Certification for Citizens Broadband Radio Service (CBRS); Conformance and Performance Test Technical Specification; CBSD/DP as Unit Under Test (UUT)

**KDB 940660 D01 Part 96 CBRS Eqpt v02**



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (SAS) Test Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)



### 3 Contents

	Page
<b>1 COVER PAGE .....</b>	<b>1</b>
<b>2 TEST SUMMARY .....</b>	<b>3</b>
<b>3 CONTENTS .....</b>	<b>5</b>
<b>4 GENERAL INFORMATION .....</b>	<b>7</b>
4.1 DETAILS OF E.U.T. ....	7
4.2 DESCRIPTION OF CBSD/DP SUPPORT FEATURES .....	7
4.3 SUMMARY OF TEST RESULTS.....	8
4.4 MEASUREMENT UNCERTAINTY .....	8
4.5 DESCRIPTION OF SUPPORT UNITS .....	8
4.6 TEST LOCATION .....	9
<b>5 EQUIPMENT LIST .....</b>	<b>10</b>
<b>6 TEST METHOD AND ENVIRONMENT.....</b>	<b>11</b>
6.1 CBSD/DP CONFORMANCE AND PERFORMANCE .....	11
6.2 CBSD TEST PROCEDURE .....	11
6.3 TEST ENVIRONMENT .....	12
6.4 TEST SETUP .....	12
<b>7 TEST DATA.....</b>	<b>13</b>
7.1 CBSD REGISTRATION PROCESS.....	13
7.1.1 WINNF.FT.D.REG.2.....	13
7.1.2 WINNF.FT.D.REG.6.....	14
7.1.3 WINNF.FT.D.REG.9.....	15
7.1.4 WINNF.FT.D.REG.11.....	15
7.1.5 WINNF.FT.D.REG.13.....	16
7.1.6 WINNF.FT.D.REG.15.....	16
7.1.7 WINNF.FT.D.REG.17.....	17
7.1.8 WINNF.FT.D.REG.19.....	17
7.2 CBSD SPECTRUM GRANT PROCESS .....	18
7.2.1 WINNF.FT.C.GRA.1.....	18
7.2.2 WINNF.FT.C.GRA.2.....	18
7.3 CBSD HEARTBEAT PROCESS .....	19
7.3.1 WINNF.FT.D.HBT.2.....	19
7.3.2 WINNF.FT.C.HBT.3.....	22
7.3.3 WINNF.FT.C.HBT.5.....	23
7.3.4 WINNF.FT.C.HBT.6.....	24
7.3.5 WINNF.FT.C.HBT.7.....	25
7.3.6 WINNF.FT.D.HBT.8.....	26
7.3.7 WINNF.FT.C.HBT.9.....	27
7.3.8 WINNF.FT.C.HBT.10.....	28



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (Shenzhen) Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.4	CBSD MEASUREMENT REPORT .....	29
7.4.1	WINNF.FT.D.MES.2 .....	29
7.4.2	WINNF.FT.C.MES.3 .....	31
7.4.3	WINNF.FT.D.MES.5 .....	32
7.5	CBSD RELINQUISHMENT PROCESS .....	34
7.5.1	WINNF.FT.D.RLQ.2 .....	34
7.6	CBSD DEREGISTRATION PROCESS .....	35
7.6.1	WINNF.FT.D.DRG.2 .....	35
7.7	CBSD SECURITY VALIDATION .....	36
7.7.1	WINNF.FT.C.SCS.1 .....	36
7.7.2	WINNF.FT.C.SCS.2 .....	36
7.7.3	WINNF.FT.C.SCS.3 .....	37
7.7.4	WINNF.FT.C.SCS.4 .....	37
7.7.5	WINNF.FT.C.SCS.5 .....	38
7.8	CBSD RF POWER MEASUREMENT .....	39
7.8.1	WINNF.PT.C.HBT.1 .....	39
<b>8</b>	<b>TEST DATA LOG .....</b>	<b>42</b>
8.1	WINNF.FT.C.SCS.1 .....	42
8.2	WINNF.FT.C.SCS.2 .....	43
8.3	WINNF.FT.C.SCS.3 .....	44
8.4	WINNF.FT.C.SCS.4 .....	45
8.5	WINNF.FT.C.SCS.5 .....	46
<b>9</b>	<b>PHOTOGRAPHS .....</b>	<b>47</b>
9.1	EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS) .....	47



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (General Services & Laboratory)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

## 4 General Information

### 4.1 Details of E.U.T.

Power supply:	Adapter Model NO.: G0566-480-100 Input: 100-240V~50/60Hz, 1.5A Output: 48.0V, 1.0A
Sample Type:	Fixed device
CBSD Class:	B
Transmitter Frequency Band:	LTE Band 48
Transmitter Frequency Range:	3550~3700MHz
Hardware Version:	A01
Software Version:	BaiBS_QRTB_2.7.3
Test sample:	SN1: 12020003952147B0033 SN2: 12020003952147B0014
Antenna Gain:	13dBi
Note: This is a BTS-CBSD communication with Domain Proxy. Domain Proxy information show as below: Model No. of Domain Proxy: LICA-1513A Software Version of Domain Proxy: BaiOMC_7.0.3	

### 4.2 Description of CBSD/DP Support Features

Condition	Feature Description	Supported
C1	Mandatory for UUT which supports multi-step registration message.	Y
C2	Mandatory for UUT which supports single-step registration with no CPI-signed data in the registration message. By definition, this is a subset of Category A devices which determine all registration information, including location, without CPI intervention.	N
C3	Mandatory for UUT which supports single-step registration containing CPI-signed data in the registration message.	Y
C4	Mandatory for UUT which supports RECEIVED_POWER_WITHOUT_GRANT measurement report type.	Y
C5	Mandatory for UUT which supports RECEIVED_POWER_WITH_GRANT measurement report type.	Y
C6	Mandatory for UUT which supports parameter change being made at the UUT and prior to sending a deregistration.	N

Y: Supported

N: Not supported



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch, Inspection & Testing Services, CCC Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

### 4.3 Summary of Test Results

WINNF-TS-0122			
Classes	Test Case Items	Pass Items	Pass Rate (%)
FT (CBSD, DP/CBSD)	28	28	100
PT (CBSD, DP/CBSD)	1	1	100
Total	29	29	100

Note:

1. Functional Test (FT): Test to validate the conformance of the Protocols and functionalities implemented in the CBSD/DP UUT to the requirements developed by WinnForum and supporting FCC/DoD requirements.
2. Field/Performance Test (PT): Test to check the capability of the CBSD/DP UUT to support various traffic models and actual operations in the field.

### 4.4 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	$\pm 7.25 \times 10^{-8}$
2	RF conducted power	$\pm 0.75\text{dB}$
3	Temperature test	$\pm 1^{\circ}\text{C}$
4	Humidity test	$\pm 3\%$
5	Supply voltages	$\pm 1.5\%$
6	Time	$\pm 3\%$

### 4.5 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
CPE	SMAWAVE	USB Dongle	/
EPC	Lanner Electronics Inc.	LICA-1513A	LR202002004052
Router	TP-LINK	TL-R860+	1175379002425



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
 Shenzhen Branch Inspection & Testing Services Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



#### 4.6 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.  
518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.





## 5 Equipment List

Test Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Laptop (With SAS Test harness)	Lenovo	Pro-13API 2019	REF. No.SEA1800	/	/
Spectrum Analyzer	R&S	FSP	SEM004-06	2020-09-24	2020-09-23
Shield Room	SAEMC	MSR433	SEM001-11	2018-03-13	2021-03-12
				2021-03-13	2024-03-12
Coaxial Cable	SGS	N/A	SEM031-01	2020-07-11	2021-07-10
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-03	2020-09-27	2021-09-26



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (General Services) Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)

## 6 Test Method and Environment

### 6.1 CBSD/DP Conformance and Performance

Test Requirement: CBRS CBSD Test Specification WINNF-TS-0122-V1.0.0  
Test Method: CBRS CBSD Test Specification WINNF-TS-0122-V1.0.0  
WINNF-IN-0156\_WinnForum\_SAS\_Test\_Harness\_CBSD\_UUT\_Tutorial\_v1\_0\_0\_1

### 6.2 CBSD Test Procedure

- a. Connect the UUT to SAS Test Harness system and RF Test instruments via the DP interface and RF components. The highest level is set to test configuration.
- b. UUT shall be UTC time synchronized
- c. The frequency band is granted and set as UUT supported Modulation and Channels, transmitted power of the UUT according to it granted parameters from the SAS Test Harness.
- d. Each test case results were recorded and validated by SAS Test Harness system and RF instruments test cases was recorded test results from SAS Test Harness system.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (General Services) Laboratory


No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)

### 6.3 Test Environment

Test Harness Version: V1.0.0.3  
Operating System: Microsoft Windows 10  
TLS Version: 1.2  
Python Version: 2.7.13  
Environmental Conditions: 25deg. C, 65%RH  
Input Power: 120Vac, 60Hz

### 6.4 Test Setup

- 1) DP is deployed on the network management, and the registration of DP to SAS is to register with SAS according to the granularity of CBSID;
- 2) The DP and the network element communicate messages according to the cell granularity, and each CBSID corresponds to a cell of an RRU which belongs to a base station.

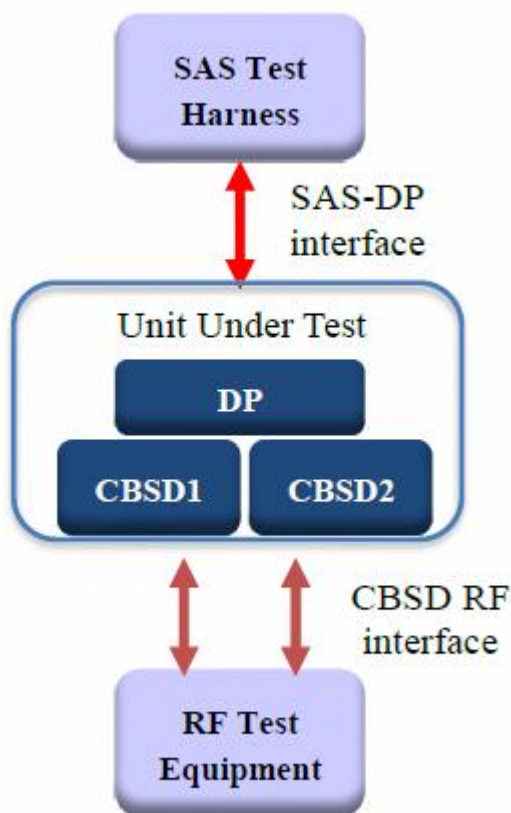

DP/CBSD as UUT, BTS-CBSD communication with Domain Proxy



## 7 Test Data

### 7.1 CBSD Registration Process

#### 7.1.1 WINNF.FT.D.REG.2

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> <li>● UUT has successfully completed SAS Discovery and Authentication with the SAS Test Harness</li> <li>● UUT is in the Unregistered state</li> </ul>	--	--
2	DP with two CBSD sends correct Registration request information, as specified in [n.5], in the form of one 2-element Array or as individual messages to the SAS Test Harness: <ul style="list-style-type: none"> <li>● The required userId, fcId and cbsdSerialNumber registration parameters shall be sent for each CBSD and conform to proper format and acceptable ranges.</li> <li>● Any REG-conditional or optional registration parameters that may be included in the message shall be verified that they conform to proper format and are within acceptable ranges.</li> </ul> <p>Note: It is outside the scope of this document to test the Registration information that is supplied via another means.</p>	<div>■</div> Pass	<div>□</div> Fail
3	<ul style="list-style-type: none"> <li>● SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or individual messages as follows: <ul style="list-style-type: none"> <li>- cbsdId = Ci</li> <li>- measReportConfig shall not be included</li> <li>- responseCode = 0 for each CBSD</li> </ul> </li> </ul>	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> <li>● UUT shall not transmit RF</li> </ul>	<div>■</div> Pass	<div>□</div> Fail

**7.1.2 WINNF.FT.D.REG.6**

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> <li>● UUT has successfully completed SAS Discovery and Authentication with the SAS Test Harness</li> <li>● UUT is in the Unregistered state</li> <li>● All of the required and REG-Conditional parameters shall be configured and CPI signature provided</li> </ul>	--	--
2	<p>DP with two CBSD sends correct Registration request information, as specified in [n.5], in the form of one 2-element Array or as individual messages to the SAS Test Harness:</p> <ul style="list-style-type: none"> <li>● The required userId, fcld and cbsdSerialNumber and REG-Conditional cbsdCategory, airInterface, measCapability and cpiSignatureData registration parameters shall be sent from the CBSD and conform to proper format and acceptable ranges.</li> <li>● Any optional registration parameters that may be included in the message shall be verified that they conform to proper format and are within acceptable ranges.</li> </ul>	<div>■ Pass</div>	<div>□ Fail</div>
3	<ul style="list-style-type: none"> <li>● SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or individual messages as follows: <ul style="list-style-type: none"> <li>- cbsdId = Ci</li> <li>- measReportConfig shall not be included</li> <li>- responseCode = 0 for each CBSD</li> </ul> </li> </ul>	--	--
4	<p>After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.</p>	--	--
5	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"> <li>● UUT shall not transmit RF</li> </ul>	<div>■ Pass</div>	<div>□ Fail</div>

### 7.1.3 WINNF.FT.D.REG.9

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> <li>● UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li> <li>● UUT is in the Unregistered state</li> </ul>	--	--
2	The DP with two CBSDs sends a Registration request in the form of one 2-element Array or as individual messages to SAS Test Harness.	--	--
3	SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or as individual messages as follows: <ul style="list-style-type: none"> <li>- SAS response does not include a cbsdId.</li> <li>- responseCode = 102 for CBSD1 and CBSD2</li> </ul>	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> <li>● UUT shall not transmit RF</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

### 7.1.4 WINNF.FT.D.REG.11

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> <li>● UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li> <li>● UUT is in the Unregistered state</li> </ul>	--	--
2	The DP with two CBSDs sends a Registration request in the form of one 2-element Array or as individual messages to SAS Test Harness.	--	--
3	SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or as individual messages as follows: <ul style="list-style-type: none"> <li>- SAS response does not include a cbsdId.</li> <li>- responseCode = 200 for CBSD1 and CBSD2</li> </ul>	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> <li>● UUT shall not transmit RF</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch, Inspection & Testing Services

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

### 7.1.5 WINNF.FT.D.REG.13

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> <li>● UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li> <li>● UUT is in the Unregistered state</li> </ul>	--	--
2	The DP with two CBSDs sends a Registration request in the form of one 2-element Array or as individual messages to SAS Test Harness.	--	--
3	SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or as individual messages as follows: <ul style="list-style-type: none"> <li>- SAS response does not include a cbsdId.</li> <li>- responseCode = 0 for CBSD1</li> <li>- responseCode = 103 for CBSD2</li> </ul>	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> <li>● UUT shall not transmit RF</li> </ul>	■ Pass	□ Fail

### 7.1.6 WINNF.FT.D.REG.15

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> <li>● UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li> <li>● UUT is in the Unregistered state</li> </ul>	--	--
2	The DP with two CBSDs sends a Registration request in the form of one 2-element Array or as individual messages to SAS Test Harness.	--	--
3	SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or as individual messages as follows: <ul style="list-style-type: none"> <li>- SAS response does not include a cbsdId.</li> <li>- responseCode = 0 for CBSD1</li> <li>- responseCode = 101 for CBSD2</li> </ul>	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> <li>● UUT shall not transmit RF</li> </ul>	■ Pass	□ Fail



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)  
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



**7.1.7 WINNF.FT.D.REG.17**

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> <li>● UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li> <li>● UUT is in the Unregistered state</li> </ul>	--	--
2	The DP with two CBSDs sends a Registration request in the form of one 2-element Array or as individual messages to SAS Test Harness.	--	--
3	SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or as individual messages as follows: <ul style="list-style-type: none"> <li>- SAS response does not include a cbsdId.</li> <li>- responseCode = 100 for CBSD1 and CBSD2</li> </ul>	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> <li>● UUT shall not transmit RF</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

**7.1.8 WINNF.FT.D.REG.19**

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> <li>● UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li> <li>● UUT is in the Unregistered state</li> </ul>	--	--
2	The DP with two CBSDs sends a Registration request in the form of one 2-element Array or as individual messages to SAS Test Harness.	--	--
3	SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or as individual messages as follows: <ul style="list-style-type: none"> <li>- SAS response does not include a cbsdId.</li> <li>- responseCode = 0 for CBSD1</li> <li>- responseCode = 201 for CBSD2</li> </ul>	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> <li>● UUT shall not transmit RF</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch, Inspection & Testing Services

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

## 7.2 CBSD Spectrum Grant Process

### 7.2.1 WINNF.FT.C.GRA.1

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: ● UUT has registered successfully with SAS Test Harness, with cbsdId = C	--	--
2	UUT sends valid Grant Request.	--	--
3	SAS Test Harness sends a Grant Response message, including - cbsdId=C - responseCode = 400	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: ● UUT shall not transmit RF	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

### 7.2.2 WINNF.FT.C.GRA.2

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: ● UUT has registered successfully with SAS Test Harness, with cbsdId = C	--	--
2	UUT sends valid Grant Request.	--	--
3	SAS Test Harness sends a Grant Response message, including - cbsdId=C - responseCode = 400	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: ● UUT shall not transmit RF	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail


### 7.3 CBSD HeartBeat Process

#### 7.3.1 WINNF.FT.D.HBT.2

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> <li>DP has two CBSD registered successfully with SAS Test Harness, with <math>cbsdId = Ci, i=\{1,2\}</math></li> </ul>	--	--
2	DP sends a message: <ul style="list-style-type: none"> <li>If message is type Spectrum Inquiry Request, go to step 3, or</li> <li>If message is type Grant Request, go to step 5</li> </ul>	--	--
3	DP sends a Spectrum Inquiry Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2. Verify Spectrum Inquiry Request message is formatted correctly for each CBSD, including for $CBSDi, i=\{1,2\}$ : <ul style="list-style-type: none"> <li><math>cbsdId = Ci</math></li> <li>List of frequencyRange objects sent by DP are within the CBRS frequency range</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
4	If a separate Spectrum Inquiry Request message was sent for each CBSD, the SAS Test Harness shall respond to each Spectrum Inquiry Request message with a separate Spectrum Inquiry Response message. If a single Spectrum Inquiry Request message was sent containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Spectrum Inquiry Response message containing a 2-object array. Verify parameters for each CBSD within the Spectrum Inquiry Response message are as follows, for $CBSDi, i=\{1,2\}$ : <ul style="list-style-type: none"> <li><math>cbsdId = Ci</math></li> <li>availableChannel is an array of availableChannel objects</li> <li>responseCode = 0</li> </ul>	--	--
5	DP sends a Grant Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2. Verify Grant Request message is formatted correctly for each CBSD, including for $CBSDi, i=\{1,2\}$ : <ul style="list-style-type: none"> <li><math>cbsdId = C</math></li> <li>maxEIRP is at or below the limit appropriate for CBSD category as defined by Part 96</li> <li>operationFrequencyRange, <math>Fi</math>, sent by UUT is a valid range within the CBRS band</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
6	If a separate Grant Request message was sent for each CBSD, the SAS Test Harness shall respond to each Grant Request message with a separate Grant Response message.  If a single Grant Request message was sent containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Grant Response message containing a 2-object array.  Verify parameters for each CBSD within the Grant Response message are as follows, for $CBSDi, i=\{1,2\}$ :	--	--

	<ul style="list-style-type: none"> <li>● cbsdId = Ci</li> <li>● grantId = Gi = a valid grant ID</li> <li>● grantExpireTime = UTC time greater than duration of the test</li> <li>● responseCode = 0</li> </ul>		
7	<p>Ensure DP sends first Heartbeat Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2. Verify Heartbeat Request message is formatted correctly for each CBSD, including, for CBSDi i={1,2}:</p> <ul style="list-style-type: none"> <li>● cbsdId = Ci, i={1,2}</li> <li>● grantId = Gi, i={1,2}</li> <li>● operationState = "GRANTED"</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
8	<p>If a separate Heartbeat Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each Heartbeat Request message with a separate Heartbeat Response message.</p> <p>If a single Heartbeat Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Heartbeat Response message containing a 2-object array.</p> <p>Verify parameters for each CBSD within the Heartbeat Response message are as follows, for CBSDi:</p> <ul style="list-style-type: none"> <li>● cbsdId = Ci</li> <li>● grantId = Gi</li> <li>● transmitExpireTime = current UTC time + 200 seconds</li> <li>● responseCode = 0</li> </ul>	--	--
9	<p>For further Heartbeat Request messages sent from DP after completion of step 8, validate message is sent within latest specified heartbeatInterval for CBSDi:</p> <ul style="list-style-type: none"> <li>● cbsdId = Ci</li> <li>● grantId = Gi</li> <li>● operationState = "AUTHORIZED"</li> </ul> <p>and SAS Test Harness responds with a Heartbeat Response message including the following parameters, for CBSDi</p> <ul style="list-style-type: none"> <li>● cbsdId = Ci</li> <li>● grantId = Gi</li> <li>● transmitExpireTime = current UTC time + 200 seconds</li> <li>● responseCode = 0</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
10	<p>Monitor the RF output of the UUT from start of test until UUT transmission commences. Monitor the RF output of the UUT from start of test until RF transmission commences. Verify:</p> <ul style="list-style-type: none"> <li>● UUT does not transmit at any time prior to completion of the first heartbeat response</li> <li>● UUT transmits after step 8 is complete, and its transmission is limited to within the bandwidth range Fi.</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail



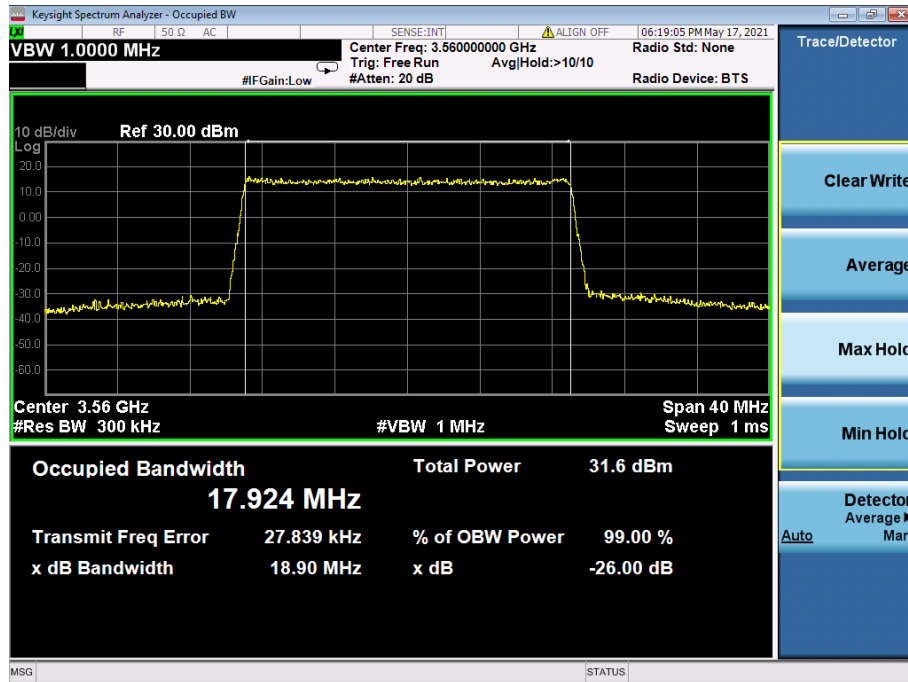

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (General Service Laboratory)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

**7.3.2 WINNF.FT.C.HBT.3**

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> <li>● UUT has registered successfully with SAS Test Harness</li> <li>● UUT has a valid single grant as follows: <ul style="list-style-type: none"> <li>○ valid cbsdId = C</li> <li>○ valid grantId = G</li> <li>○ grant is for frequency range F, power P</li> <li>○ grantExpireTime = UTC time greater than duration of the test</li> </ul> </li> <li>● UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface</li> </ul>	--	--
2	<p>UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within Heartbeat Interval specified in the latest Heartbeat Response, and formatted correctly, including:</p> <ul style="list-style-type: none"> <li>● cbsdId = C</li> <li>● grantId = G</li> <li>● operationState = "AUTHORIZED"</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
3	<p>SAS Test Harness sends a Heartbeat Response message, including the following parameters:</p> <ul style="list-style-type: none"> <li>● cbsdId = C</li> <li>● grantId = G</li> <li>● transmitExpireTime = T = Current UTC time</li> <li>● responseCode = 105 (DEREGISTER)</li> </ul>	--	--
4	<p>After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.</p>	--	--
5	<p>Monitor the RF output of the UUT. Verify:</p> <ul style="list-style-type: none"> <li>● UUT shall stop transmission within (T + 60 seconds) of completion of step 3</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

**7.3.3 WINNF.FT.C.HBT.5**

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> <li>● UUT has registered successfully with SAS Test Harness</li> <li>● UUT has a valid single grant as follows: <ul style="list-style-type: none"> <li>○ valid cbsdId = C</li> <li>○ valid grantId = G</li> <li>○ grant is for frequency range F, power P</li> <li>○ grantExpireTime = UTC time greater than duration of the test</li> </ul> </li> <li>● UUT is in GRANTED, but not AUTHORIZED state (i.e. has not performed its first Heartbeat Request)</li> </ul>	--	--
2	<p>UUT sends a Heartbeat Request message.</p> <p>Verify Heartbeat Request message is formatted correctly, including:</p> <ul style="list-style-type: none"> <li>● cbsdId = C</li> <li>● grantId = G</li> <li>● operationState = "GRANTED"</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
3	<p>SAS Test Harness sends a Heartbeat Response message, including the following parameters:</p> <ul style="list-style-type: none"> <li>● cbsdId = C</li> <li>● grantId = G</li> <li>● transmitExpireTime = T = current UTC time</li> <li>● responseCode = 501 (SUSPENDED_GRANT)</li> </ul>	--	--
4	<p>After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.</p>	--	--
5	<p>Monitor the SAS-CBSD interface. Verify either A OR B occurs:</p> <p>A. UUT sends a Heartbeat Request message. Ensure message is sent within latest specified heartbeatInterval, and is correctly formatted with parameters:</p> <ul style="list-style-type: none"> <li>● cbsdId = C</li> <li>● grantId = G</li> <li>● operationState = "GRANTED"</li> </ul> <p>B. UUT sends a Relinquishment request message. Ensure message is correctly formatted with parameters:</p> <ul style="list-style-type: none"> <li>● cbsdId = C</li> <li>● grantId = G</li> </ul> <p>Monitor the RF output of the UUT. Verify:</p> <ul style="list-style-type: none"> <li>● UUT does not transmit at any time</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

**7.3.4 WINNF.FT.C.HBT.6**

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> <li>● UUT has registered successfully with SAS Test Harness</li> <li>● UUT has a valid single grant as follows: <ul style="list-style-type: none"> <li>○ valid cbsdId = C</li> <li>○ valid grantId = G</li> <li>○ grant is for frequency range F, power P</li> <li>○ grantExpireTime = UTC time greater than duration of the test</li> </ul> </li> <li>● UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface</li> </ul>	--	--
2	<p>UUT sends a Heartbeat Request message.</p> <p>Ensure Heartbeat Request message is sent within latest specified heartbeatInterval, and is formatted correctly, including:</p> <ul style="list-style-type: none"> <li>● cbsdId = C</li> <li>● grantId = G</li> <li>● operationState = "AUTHORIZED"</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
3	<p>SAS Test Harness sends a Heartbeat Response message, including the following parameters:</p> <ul style="list-style-type: none"> <li>● cbsdId = C</li> <li>● grantId = G</li> <li>● transmitExpireTime = T = current UTC time</li> <li>● responseCode = 501 (SUSPENDED_GRANT)</li> </ul>	--	--
4	<p>After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.</p>	--	--
5	<p>Monitor the SAS-CBSD interface. Verify either A OR B occurs:</p> <p>A. UUT sends a Heartbeat Request message. Ensure message is sent within latest specified heartbeatInterval, and is correctly formatted with parameters:</p> <ul style="list-style-type: none"> <li>● cbsdId = C</li> <li>● grantId = G</li> <li>● operationState = "GRANTED"</li> </ul> <p>B. UUT sends a Relinquishment request message. Ensure message is correctly formatted with parameters:</p> <ul style="list-style-type: none"> <li>● cbsdId = C</li> <li>● grantId = G</li> </ul> <p>Monitor the RF output of the UUT. Verify:</p> <ul style="list-style-type: none"> <li>● UUT shall stop transmission within (T+60) seconds of completion of step 3</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail



**7.3.5 WINNF.FT.C.HBT.7**

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> <li>● UUT has registered successfully with SAS Test Harness</li> <li>● UUT has a valid single grant as follows: <ul style="list-style-type: none"> <li>○ valid cbsdId = C</li> <li>○ valid grantId = G</li> <li>○ grant is for frequency range F, power P</li> <li>○ grantExpireTime = UTC time greater than duration of the test</li> </ul> </li> <li>● UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface</li> </ul>	--	--
2	<p>UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within latest specified heartbeatInterval, and is formatted correctly, including:</p> <ul style="list-style-type: none"> <li>● cbsdId = C</li> <li>● grantId = G</li> <li>● operationState = "AUTHORIZED"</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
3	<p>SAS Test Harness sends a Heartbeat Response message, including the following parameters:</p> <ul style="list-style-type: none"> <li>● cbsdId = C</li> <li>● grantId = G</li> <li>● transmitExpireTime = T = current UTC time</li> <li>● responseCode = 502 (UNSYNC_OP_PARAM)</li> </ul>	--	--
4	<p>After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.</p>	--	--
5	<p>Monitor the SAS-CBSD interface. Verify:</p> <ul style="list-style-type: none"> <li>● UUT sends a Grant Relinquishment Request message. Verify message is correctly formatted with parameters: <ul style="list-style-type: none"> <li>○ cbsdId = C</li> <li>○ grantId = G</li> </ul> </li> </ul> <p>Monitor the RF output of the UUT. Verify:</p> <ul style="list-style-type: none"> <li>● UUT shall stop transmission within (T+60) seconds of completion of step 3</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

**7.3.6 WINNF.FT.D.HBT.8**

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> <li>● DP has two CBSD registered successfully with SAS Test Harness</li> <li>● Each CBSD {1,2} has a valid single grant as follows <ul style="list-style-type: none"> <li>○ valid cbsdId = Ci, i={1,2}</li> <li>○ valid grantId = Gi, i={1,2}</li> <li>○ grant is for frequency range Fi, power Pi</li> <li>○ grantExpireTime = UTC time greater than duration of the test</li> </ul> </li> <li>● Both CBSD are in AUTHORIZED state and transmitting within their granted bandwidth on RF interface</li> </ul>	--	--
2	<p>DP sends a Heartbeat Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of size 2. Verify Heartbeat Request message is sent within latest specified heartbeatInterval, and is formatted correctly for each CBSD, including, for CBSDi i={1,2}:</p> <ul style="list-style-type: none"> <li>● cbsdId = Ci, i = {1,2}</li> <li>● grantId = Gi, i = {1,2}</li> <li>● operationState = "AUTHORIZED"</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
3	<p>If separate Heartbeat Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each Heartbeat Request message with a separate Heartbeat Response message.</p> <p>If a single Heartbeat Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Heartbeat Response message containing a 2-object array.</p> <p>Parameters for each CBSD within the Heartbeat Response message should be as follows, for CBSDi:</p> <ul style="list-style-type: none"> <li>● cbsdId = Ci</li> <li>● grantId = Gi</li> <li>● For CBSD1: <ul style="list-style-type: none"> <li>○ transmitExpireTime = current UTC time + 200 seconds</li> <li>○ responseCode = 0</li> </ul> </li> <li>● For CBSD2: <ul style="list-style-type: none"> <li>○ transmitExpireTime = T = current UTC time</li> <li>○ responseCode = 500 (TERMINATED_GRANT)</li> </ul> </li> </ul>	--	--
4	<p>After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.</p> <p>If CBSD sends further Heartbeat Request messages for CBSD1, SAS Test Harness shall respond with a Heartbeat Response message with parameters:</p> <ul style="list-style-type: none"> <li>● cbsdId = C1</li> <li>● grantId = G1</li> <li>● transmitExpireTime = current UTC time + 200 seconds</li> <li>● responseCode = 0</li> <li>● Heartbeat Request message is within heartbeatInterval of previous Heartbeat Request message</li> </ul>	--	--
5	<p>Monitor the RF output of CBSD2. Verify:</p> <ul style="list-style-type: none"> <li>● CBSD2 shall stop transmission within bandwidth F2 within (T + 60 seconds) of completion of step 3</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

**7.3.7 WINNF.FT.C.HBT.9**

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> <li>● UUT has registered successfully with SAS Test Harness</li> <li>● UUT has a valid single grant as follows: <ul style="list-style-type: none"> <li>○ valid cbsdId = C</li> <li>○ valid grantId = G</li> <li>○ grant is for frequency range F, power P</li> <li>○ grantExpireTime = UTC time greater than duration of the test</li> </ul> </li> <li>● UUT is in GRANTED, but not AUTHORIZED state(i.e. has not performed its first Heartbeat Request)</li> </ul>	--	--
2	<p>UUT sends a Heartbeat Request message.</p> <p>Ensure Heartbeat Request message is sent within latest specified heartbeatInterval, and is formatted correctly, including:</p> <ul style="list-style-type: none"> <li>● cbsdId = C</li> <li>● grantId = G</li> <li>● operationState = "GRANTED"</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
3	<p>After completion of step 2, SAS Test Harness does not respond to any further</p> <ul style="list-style-type: none"> <li>● messages from UUT to simulate loss of network connection</li> </ul>	--	--
4	<p>Monitor the RF output of the UUT from start of test to 60 seconds after step 3. Verify:</p> <ul style="list-style-type: none"> <li>● At any time during the test, UUT shall not transmit on RF interface</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

**7.3.8 WINNF.FT.C.HBT.10**

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> <li>● UUT has registered successfully with SAS Test Harness</li> <li>● UUT has a valid single grant as follows: <ul style="list-style-type: none"> <li>○ valid cbsdId = C</li> <li>○ valid grantId = G</li> <li>○ grant is for frequency range F, power P</li> <li>○ grantExpireTime = UTC time greater than duration of the test</li> </ul> </li> <li>● UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface</li> </ul>	--	--
2	<p>UUT sends a Heartbeat Request message. Verify Heartbeat Request message is sent within latest specified heartbeatInterval, and is formatted correctly, including:</p> <ul style="list-style-type: none"> <li>● cbsdId = C</li> <li>● grantId = G</li> <li>● operationState = "AUTHORIZED"</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
3	<p>SAS Test Harness sends a Heartbeat Response message, including the following parameters:</p> <ul style="list-style-type: none"> <li>● cbsdId = C</li> <li>● grantId = G</li> <li>● transmitExpireTime = T = current UTC time + 200 seconds</li> <li>● responseCode = 0</li> </ul>	--	--
4	<p>After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.</p>	--	--
5	<p>Monitor the RF output of the UUT. Verify:</p> <ul style="list-style-type: none"> <li>● UUT shall stop all transmission on RF interface within (transmitExpireTime + 60 seconds), using the transmitExpireTime sent in Step 3.</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail



## 7.4 CBSD Measurement Report

### 7.4.1 WINNF.FT.D.MES.2

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> <li>● DP has successfully completed SAS Discovery and Authentication with SAS Test Harness</li> </ul>	--	--
2	DP sends a Registration Request message for each of two CBSD. This may occur in a separate Request message per CBSD, or together in a single Request message with array of 2. Verify Registration Request message contains all required parameters properly formatted for CBSDi, i={1,2}, and specifically: <ul style="list-style-type: none"> <li>● userId is present and correct</li> <li>● fcclId is present and correct</li> <li>● cbsdSerialNumber is present and correct</li> <li>● measCapability = "RECEIVED_POWER_WITHOUT_GRANT"</li> </ul>	■ Pass	□ Fail
3	If a separate Registration Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each Registration Request message with a separate Registration Response message.  If a single Registration Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Registration Response message containing a 2-object array.  Parameters for each CBSD within the Registration Response message should be as follows, for CBSDi: <ul style="list-style-type: none"> <li>● cbsdId = Ci</li> <li>● measReportConfig= "RECEIVED_POWER_WITHOUT_GRANT"</li> <li>● responseCode = 0</li> </ul>	--	--
4	UUT sends a message: <ul style="list-style-type: none"> <li>● If message is type Spectrum Inquiry Request, go to step 5, or</li> <li>● If message is type Grant Request, go to step 7</li> </ul>	--	--
5	UUT sends message type Spectrum Inquiry Request. This may occur in a separate message per CBSD, or together in a single message with array of 2. Verify Spectrum Inquiry Request message contains all required parameters properly formatted for CBSDi, i= {1,2}, and specifically: <ul style="list-style-type: none"> <li>● cbsdId = Ci</li> <li>● measReport is present, and is a properly formatted rcvdPowerMeasReport.</li> </ul>	■ Pass	□ Fail
6	If a separate Spectrum Inquiry Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each Spectrum Inquiry Request message with a separate Spectrum Inquiry Response message.  If a single Spectrum Inquiry Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Spectrum Inquiry Response message containing a 2-object array.  Parameters for each CBSD within the Spectrum Inquiry Response message should be as follows:	--	--

	<ul style="list-style-type: none"> <li>● cbsdId = Ci</li> <li>● availableChannel is an array of availableChannel objects</li> <li>● responseCode = 0</li> </ul>		
7	<p>UUT sends message type Grant Request message. This may occur in a separate message per CBSD, or together in a single message with array of 2.</p> <p>Verify the Grant Request message contains all required parameters properly formatted for CBSDi, i= {1,2}, and specifically:</p> <ul style="list-style-type: none"> <li>● cbsdId = Ci</li> <li>● measReport is present, and is a properly formatted rcvdPowerMeasReport.</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

**7.4.2 WINNF.FT.C.MES.3**

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> <li>● UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li> <li>● UUT has successfully registered with SAS Test Harness, with cbsdId=C and measCapability = "RECEIVED_POWER_WITH_GRANT"</li> </ul>	--	--
2	UUT sends a Grant Request message. Verify Grant Request message contains all required parameters properly formatted, and specifically: <ul style="list-style-type: none"> <li>● cbsdId = C</li> <li>● operationParam is present and format is valid</li> </ul>	■ Pass	□ Fail
3	SAS Test Harness sends a Grant Response message, with the following parameters: <ul style="list-style-type: none"> <li>● cbsdId = C</li> <li>● grantId = G = valid grant ID</li> <li>● grantExpireTime = UTC time in the future</li> <li>● heartbeatInterval = 60 seconds</li> <li>● measReportConfig= "RECEIVED_POWER_WITH_GRANT"</li> <li>● operationParam is set to valid operating parameters</li> <li>● channelType = "GAA"</li> <li>● responseCode = 0</li> </ul>	--	--
4	UUT sends a Heartbeat Request message. Verify message contains all required parameters properly formatted, and specifically: <ul style="list-style-type: none"> <li>● cbsdId = C</li> <li>● grantId = G</li> <li>● operationState = "GRANTED"</li> </ul>	■ Pass	□ Fail
5	If Heartbeat Request message (step 4) contains measReport object, then: <ul style="list-style-type: none"> <li>● verify measReport is properly formatted as object rcvdPowerMeasReport</li> <li>● end test, with PASS result</li> </ul> else, if Heartbeat Request message (step 4) does not contain measReport object, then: <ul style="list-style-type: none"> <li>● If number of Heartbeat Requests sent by UUT after Step 3 is = 5, then stop test with result of FAIL</li> </ul>	■ Pass	□ Fail
6	SAS Test Harness sends a Heartbeat Response message, containing all required parameters properly formatted, and specifically: <ul style="list-style-type: none"> <li>● cbsdId = C</li> <li>● grantId = G</li> <li>● transmitExpireTime = current UTC time + 200 seconds</li> <li>● responseCode = 0</li> </ul> Go to Step 4, above	--	--

**7.4.3 WINNF.FT.D.MES.5**

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> <li>● DP has successfully completed SAS Discovery and Authentication with SAS Test Harness</li> <li>● DP has successfully registered 2 CBSD with SAS Test Harness, each with cbsdId=Ci, i={1,2} and measCapability = "RECEIVED_POWER_WITH_GRANT"</li> <li>● DP has received a valid grant with grantId = Gi, i={1,2} for each CBSD</li> <li>● Both CBSD are in Grant State AUTHORIZED and actively transmitting within the bounds of their grants.</li> <li>● Grants have heartbeatInterval =60 seconds</li> </ul>	--	--
2	<p>Verify DP sends a Heartbeat Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2. Verify Heartbeat Request message contains all required parameters properly formatted for each CBSD, specifically, for CBSDi:</p> <ul style="list-style-type: none"> <li>● cbsdId = Ci</li> <li>● grantId = Gi</li> <li>● operationState = "AUTHORIZED"</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
3	<p>If a separate Heartbeat Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each Heartbeat Request message with a separate Heartbeat Response message.</p> <p>If a single Heartbeat Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Heartbeat Response message containing a 2-object array.</p> <p>Parameters for each CBSD within the Heartbeat Response message containing all required parameters properly formatted, and specifically:</p> <ul style="list-style-type: none"> <li>● cbsdId = Ci</li> <li>● grantId = Gi</li> <li>● measReportConfig= "RECEIVED_POWER_WITH_GRANT"</li> <li>● responseCode = 0</li> </ul>	--	--
4	<p>Verify DP sends a Heartbeat Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2. Verify Heartbeat Request message contains all required parameters properly formatted for each CBSD, and specifically, for CBSDi, i = {1,2}:</p> <ul style="list-style-type: none"> <li>● cbsdId = Ci</li> <li>● grantId = Gi</li> <li>● operationState = "AUTHORIZED"</li> <li>● Check whether measReport is present, and if present, ensure it is a properly formatted rcvdPowerMeasReport object, and record its reception for each CBSDi, i = {1,2}.</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
5	<p>If Heartbeat Request message (step 4) contains measReport object, then:</p> <ul style="list-style-type: none"> <li>● Verify measReport is properly formatted as object rcvdPowerMeasReport</li> <li>● record which CBSD have successfully sent a measReport object</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail



	<p>If all CBSD<sub>i</sub>, <math>i = \{1,2\}</math> have successfully sent a measReport object, then</p> <ul style="list-style-type: none"> <li>● end test, with PASS result</li> </ul> <p>else, if the number of Heartbeat Requests sent per CBSD is 5 or more, then stop test with result of FAIL</p>		
6	<p>If a separate Heartbeat Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each Heartbeat Request message with a separate Heartbeat Response message.</p> <p>If a single Heartbeat Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Heartbeat Response message containing a 2-object array.</p> <p>Parameters for each CBSD within the Heartbeat Response message containing all required parameters properly formatted, and specifically:</p> <ul style="list-style-type: none"> <li>● cbsdId = C<sub>i</sub></li> <li>● grantId = G<sub>i</sub></li> <li>● responseCode = 0</li> </ul> <p>Go to Step 4, above.</p>	--	--

## 7.5 CBSD Relinquishment Process

### 7.5.1 WINNF.FT.D.RLQ.2

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> <li>● DP has successfully completed SAS Discovery and Authentication with SAS Test Harness</li> <li>● DP has successfully registered 2 CBSD with SAS Test Harness, each with cbsdId=Ci, i={1,2}</li> <li>● DP has received a valid grant with grantId = Gi, i={1,2} for each CBSD</li> <li>● Both CBSD are in Grant State AUTHORIZED and actively transmitting within the bounds of their grants.</li> </ul> <p>Invoke trigger to relinquish UUT Grant from the SAS Test Harness</p>	--	--
2	<p>Verify DP sends a Relinquishment Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2.</p> <p>Verify Relinquishment Request message contains all required parameters properly formatted for each CBSD, specifically, for CBSDi:</p> <ul style="list-style-type: none"> <li>● cbsdId = Ci</li> <li>● grantId = Gi</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
3	<p>If a separate Relinquishment Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each request message with a separate response message.</p> <p>If a single Relinquishment Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Response message containing a 2-object array.</p> <p>Parameters for each CBSD within the Relinquishment Response shall be as follows:</p> <ul style="list-style-type: none"> <li>● cbsdId = Ci</li> <li>● grantId = Gi</li> <li>● responseCode = 0</li> </ul>	--	--
4	<p>After completion of step 3, SAS Test Harness will not provide any additional positive response (responseCode=0) to further request messages from the UUT.</p>	--	--
5	<p>Monitor the RF output of each UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"> <li>● UUT shall stop RF transmission at any time between triggering the relinquishments and UUT sending the relinquishment requests for each CBSD.</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

## 7.6 CBSD Deregistration Process

### 7.6.1 WINNF.FT.D.DRG.2

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> <li>● Each UUT has successfully registered with SAS Test Harness</li> <li>● Each UUT is in the authorized state</li> <li>● DP has successfully completed SAS Discovery and Authentication with SAS Test Harness</li> <li>● DP has successfully registered 2 CBSD with SAS Test Harness, each with cbsdId=Ci, i={1,2}</li> <li>● DP has received a valid grant with grantId = Gi, i={1,2} for each CBSD</li> <li>● Both CBSD are in Grant State AUTHORIZED and actively transmitting within the bounds of their grants.</li> </ul> <p>Invoke trigger to relinquish UUT Grant from the SAS Test Harness</p>	--	--
2	UUT sends a Relinquishment request and receives Relinquishment response with responseCode=0	--	--
3	<p>Verify DP sends a Deregistration Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2. Verify Deregistration Request message contains all required parameters properly formatted for each CBSD, specifically, for CBSDi:</p> <ul style="list-style-type: none"> <li>● cbsdId = Ci</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
4	<p>If a separate Deregistration Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each request message with a separate response message.</p> <p>If a single Deregistration Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Response message containing a 2-object array.</p> <p>Parameters for each CBSD within the Deregistration Response shall be as follows:</p> <ul style="list-style-type: none"> <li>● cbsdId = Ci</li> <li>● responseCode = 0</li> </ul>	--	--
5	After completion of step 4, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
6	<p>Monitor the RF output of each UUT from start of test until 60 seconds after Step 4 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"> <li>● UUT stopped RF transmission at any time between triggering the deregistration and either A OR B occurs:</li> </ul> <p>A. UUT sending a Registration Request message, as this is not mandatory</p> <p>B. UUT sending a Deregistration Request message</p>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

## 7.7 CBSD Security Validation

### 7.7.1 WINNF.FT.C.SCS.1

#	Test Execution Steps	Results	
1	<ul style="list-style-type: none"> <li>UUT shall start CBSD-SAS communication with the security procedure</li> <li>The UUT shall establish a TLS handshake with the SAS Test Harness using configured certificate.</li> <li>Configure the SAS Test Harness to accept the security procedure and establish the connection</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
2	<ul style="list-style-type: none"> <li>Make sure that Mutual authentication happens between UUT and the SAS Test Harness.</li> <li>Make sure that UUT uses TLS v1.2</li> <li>Make sure that cipher suites from one of the following is selected,               <ul style="list-style-type: none"> <li>TLS_RSA_WITH_AES_128_GCM_SHA256</li> <li>TLS_RSA_WITH_AES_256_GCM_SHA384</li> <li>TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256</li> <li>TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384</li> <li>TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256</li> </ul> </li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
3	<p>A successful registration is accomplished using one of the test cases described in section 6.1.4.1, depending on CBSD capability.</p> <ul style="list-style-type: none"> <li>UUT sends a registration request to the SAS Test Harness and the SAS Test Harness sends a Registration Response with responseCode = 0 and cbsdId.</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
4	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"> <li>UUT shall not transmit RF</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

### 7.7.2 WINNF.FT.C.SCS.2

#	Test Execution Steps	Results	
1	<ul style="list-style-type: none"> <li>UUT shall start CBSD-SAS communication with the security procedures</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
2	<ul style="list-style-type: none"> <li>Make sure that UUT uses TLS v1.2 for security establishment.</li> <li>Make sure UUT selects the correct cipher suite.</li> <li>UUT shall use CRL or OCSP to verify the validity of the server certificate.</li> <li>Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness.</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
3	<ul style="list-style-type: none"> <li>UUT may retry for the security procedure which shall fail.</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
4	<ul style="list-style-type: none"> <li>SAS Test-Harness shall not receive any Registration request or any application data.</li> </ul>	--	--
5	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"> <li>UUT shall not transmit RF</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)  
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn  
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



### 7.7.3 WINNF.FT.C.SCS.3

#	Test Execution Steps	Results	
1	● UUT shall start CBSD-SAS communication with the security procedures	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
2	<ul style="list-style-type: none"> <li>● Make sure that UUT uses TLS v1.2 for security establishment.</li> <li>● Make sure UUT selects the correct cipher suite.</li> <li>● UUT shall use CRL or OCSP to verify the validity of the server certificate.</li> <li>● Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness.</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
3	● UUT may retry for the security procedure which shall fail.	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
4	● SAS Test-Harness shall not receive any Registration request or any application data.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> <li>● UUT shall not transmit RF</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

### 7.7.4 WINNF.FT.C.SCS.4

#	Test Execution Steps	Results	
1	● UUT shall start CBSD-SAS communication with the security procedures	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
2	<ul style="list-style-type: none"> <li>● Make sure that UUT uses TLS v1.2 for security establishment.</li> <li>● Make sure UUT selects the correct cipher suite.</li> <li>● UUT shall use CRL or OCSP to verify the validity of the server certificate</li> <li>● Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness.</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
3	● UUT may retry for the security procedure which shall fail.	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
4	● SAS Test-Harness shall not receive any Registration request or any application data.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> <li>● UUT shall not transmit RF</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)  
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

**7.7.5 WINNF.FT.C.SCS.5**

#	Test Execution Steps	Results	
1	<ul style="list-style-type: none"> <li>UUT shall start CBSD-SAS communication with the security procedures</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
2	<ul style="list-style-type: none"> <li>Make sure that UUT uses TLS v1.2 for security establishment.</li> <li>Make sure UUT selects the correct cipher suite.</li> <li>UUT shall use CRL or OCSP to verify the validity of the server certificate</li> <li>Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness.</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
3	<ul style="list-style-type: none"> <li>UUT may retry for the security procedure which shall fail.</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
4	<ul style="list-style-type: none"> <li>SAS Test-Harness shall not receive any Registration request or any application data.</li> </ul>	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> <li>UUT shall not transmit RF</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

## 7.8 CBSD RF Power Measurement

### 7.8.1 WINNF.PT.C.HBT.1

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> <li>UUT has successfully completed SAS Discovery and Authentication with the SAS Test Harness</li> <li>UUT has registered with the SAS, with CBSD ID = C</li> <li>UUT has a single valid grant G with parameters {lowFrequency = FL, highFrequency = FH, maxEirp = Pi}, with grant in AUTHORIZED state, and grantExpireTime set to a value far past the duration of this test case</li> <li>Note: in order for the UUT to request a grant with the parameters {lowFrequency, highFrequency, maxEirp}, the SAS Test Harness may need to provide appropriate guidance in the availableChannel object of the spectrumInquiry response message, and the operationParam object of the grant response message. Alternately, the UUT vendor may provide the ability to set those parameters on the UUT so that the UUT will request a grant with those parameters</li> </ul>	--	--
2	<p>UUT and SAS Test Harness perform a series of Heartbeat Request/Response cycles, which continues until the other test steps are complete. Messaging for each cycle is as follows:</p> <ul style="list-style-type: none"> <li>UUT sends Heartbeat Request, including: <ul style="list-style-type: none"> <li>cbsdId = C</li> <li>grantId = G</li> </ul> </li> <li>SAS Test Harness responds with Heartbeat Response, including: <ul style="list-style-type: none"> <li>cbsdId = C</li> <li>grantId = G</li> <li>transmitExpireTime = current UTC time + 200 seconds</li> <li>responseCode = 0</li> </ul> </li> </ul>	--	--
3	<p>Tester performs power measurement on RF interface(s) of UUT, and verifies it complies with the maxEirp setting, Pi. The RF measurement method is out of scope of this document, but may include additional configuration of the UUT, as required, to fulfill the requirements of the power measurement method.</p> <ul style="list-style-type: none"> <li>Note: it may be required for the vendor to provide a method or configuration to bring the UUT to a mode which is required by the measurement methodology. Any such mode is vendor-specific and depends upon UUT behavior and the measurement methodology.</li> </ul>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail


RF measurement plot for Test Case :

- Tester performs power measurement on RF interface(s) of UUT, and verifies it complies with the maxEirp setting, Pi. The RF measurement method is out of scope of this document, but may include additional configuration of the UUT, as required, to fulfill the requirements of the power measurement method.

Freq. (MHz)	Conducted PSD (dBm/MHz)	Antenna Gain (dBi)	Array Gain (dBi)	EIRP PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
3600	5.162	13.0	3.01	21.172	27	Pass
3600	1.314	13.0	3.01	17.324	23	Pass
3600	-6.703	13.0	3.01	9.307	15	Pass


Note:

- Array Gain=10log(n), n is the antenna number, for this CBSD the n=2
- EIRP PSD= Conducted PSD+ Antenna Gain+ Array Gain
- Conducted PSD test data include cable loss and loss of attenuator, cable loss and loss of attenuator is 5dBi

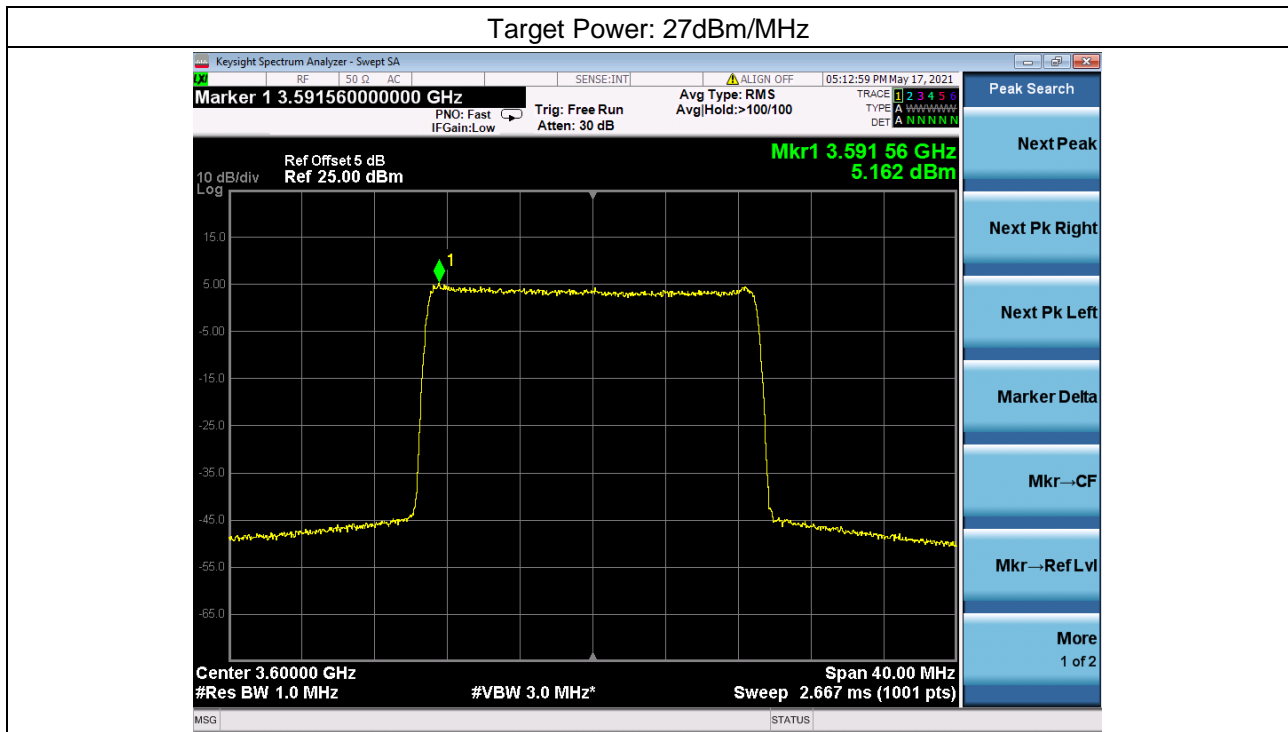




Target Power: 23dBm/MHz

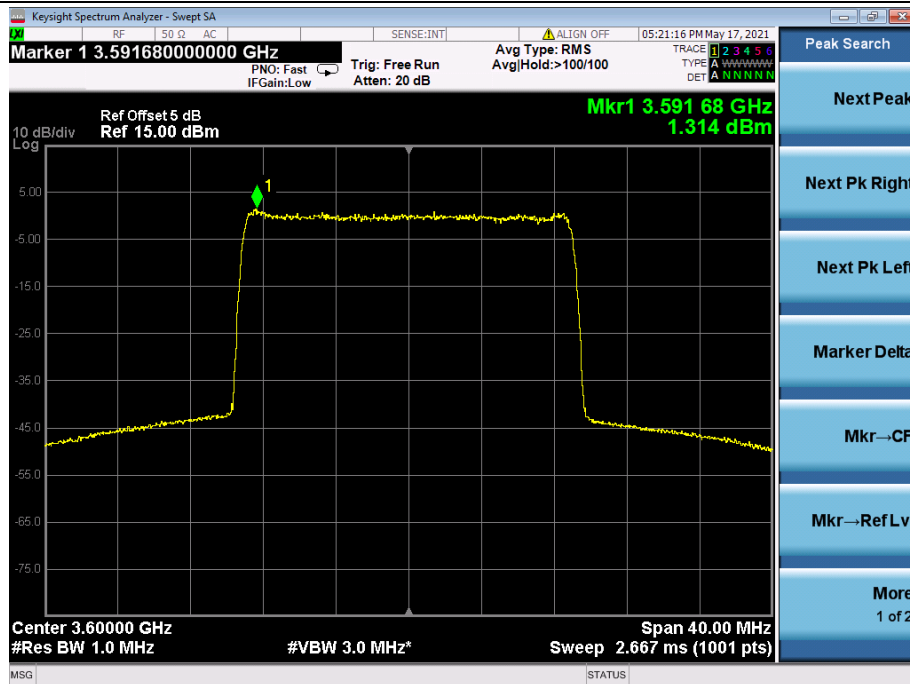


Target Power: 15dBm/MHz

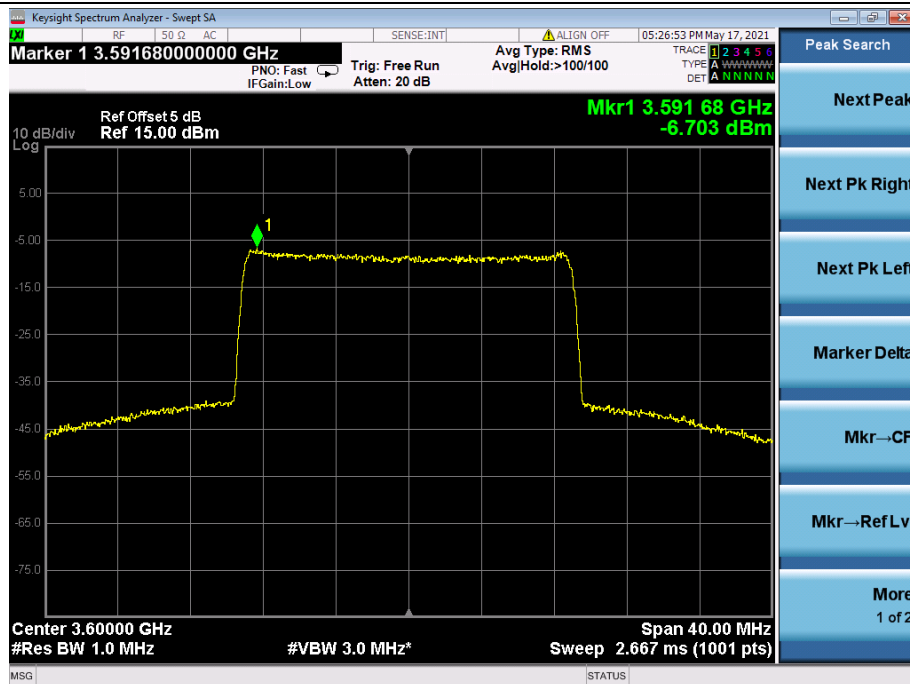

## 8 Test Data Log

Test data log refer to log files (Log files appendix) except for securitytest cases which shows below.

### 8.1 WINNF.FT.C.SCS.1


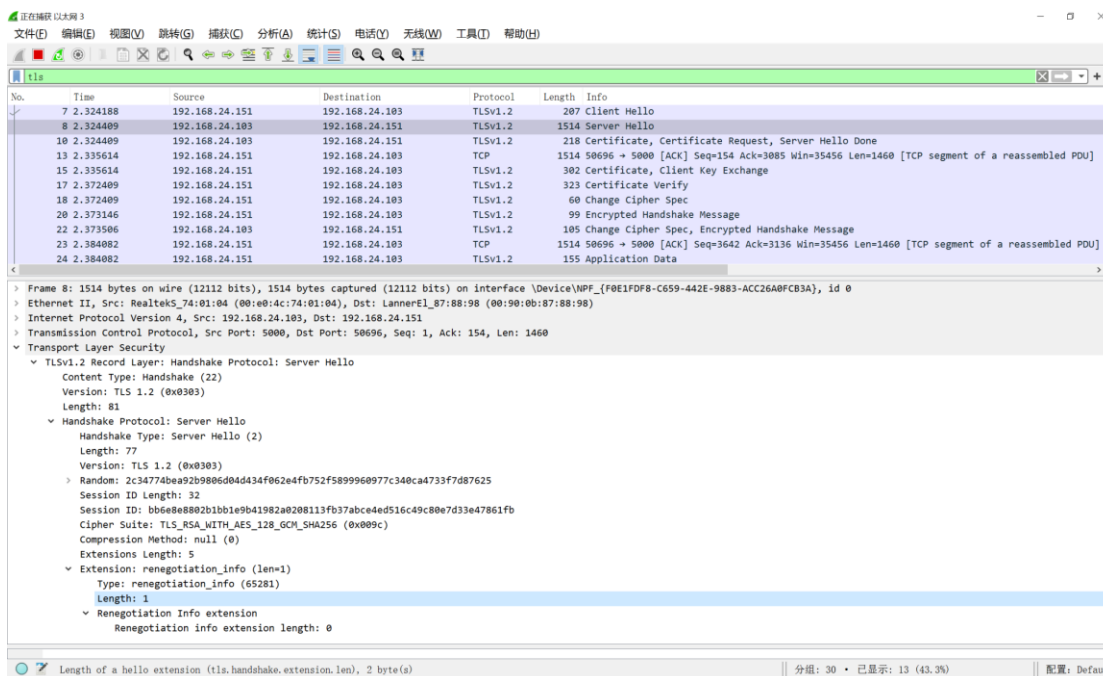


No.	Time	Source	Destination	Protocol	Length	Info
7	2.324188	192.168.24.151	192.168.24.103	TLSv1.2	207	Client Hello
8	2.324409	192.168.24.103	192.168.24.151	TLSv1.2	1514	Server Hello
10	2.324409	192.168.24.103	192.168.24.151	TLSv1.2	218	Certificate, Certificate Request, Server Hello Done
13	2.335614	192.168.24.151	192.168.24.103	TCP	1514	50696 → 5000 [ACK] Seq=154 Ack=3085 Win=35456 Len=1460 [TCP segment of a reassembled PDU]
15	2.335614	192.168.24.151	192.168.24.103	TLSv1.2	302	Certificate, Client Key Exchange
17	2.372409	192.168.24.151	192.168.24.103	TLSv1.2	323	Certificate Verify
18	2.372409	192.168.24.151	192.168.24.103	TLSv1.2	60	Change Cipher Spec
20	2.373146	192.168.24.151	192.168.24.103	TLSv1.2	99	Encrypted Handshake Message
22	2.373506	192.168.24.103	192.168.24.151	TLSv1.2	105	Change Cipher Spec, Encrypted Handshake Message
23	2.384082	192.168.24.151	192.168.24.103	TCP	1514	50696 → 5000 [ACK] Seq=3642 Ack=3136 Win=35456 Len=1460 [TCP segment of a reassembled PDU]
24	2.384082	192.168.24.151	192.168.24.103	TLSv1.2	155	Application Data

Frame 8: 1514 bytes on wire (12112 bits), 1514 bytes captured (12112 bits) on interface \Device\NPF{F0E1F0F8-C659-442E-9883-ACC26A0FCB3A}, id 0  
 Ethernet II, Src: Realtek5\_74:01:04 (00:0e:04:c7:41:04), Dst: LanmerE1\_87:88:98 (00:90:0b:87:88:98)  
 Internet Protocol Version 4, Src: 192.168.24.103, Dst: 192.168.24.151  
 Transmission Control Protocol, Src Port: 5000, Dst Port: 50696, Seq: 1, Ack: 154, Len: 1460  
 Transport Layer Security  
 TLSv1.2 Record Layer: Handshake Protocol: Server Hello  
 Content Type: Handshake (22)  
 Version: TLS 1.2 (0x0303)  
 Length: 81  
 Handshake Protocol: Server Hello  
 Handshake Type: Server Hello (2)  
 Length: 77  
 Version: TLS 1.2 (0x0303)  
 Random: 2c34774be92b9806d04d434f062e4fb752f5899960977c340ca4733f7d87625  
 Session ID length: 32  
 Session ID: bbe8e8802b1bb1e9b41982a0208113fb37abc4ed516c49c80e7d33e47861fb  
 Cipher Suite: TLS\_RSA\_WITH\_AES\_128\_GCM\_SHA256 (0x009c)  
 Compression Method: null (0)  
 Extensions Length: 5  
 Extension: renegotiation\_info (len=1)  
 Type: renegotiation\_info (65281)  
 Length: 1  
 Renegotiation Info extension  
 Renegotiation info extension length: 0



## 8.2 WINNF.FT.C.SCS.2

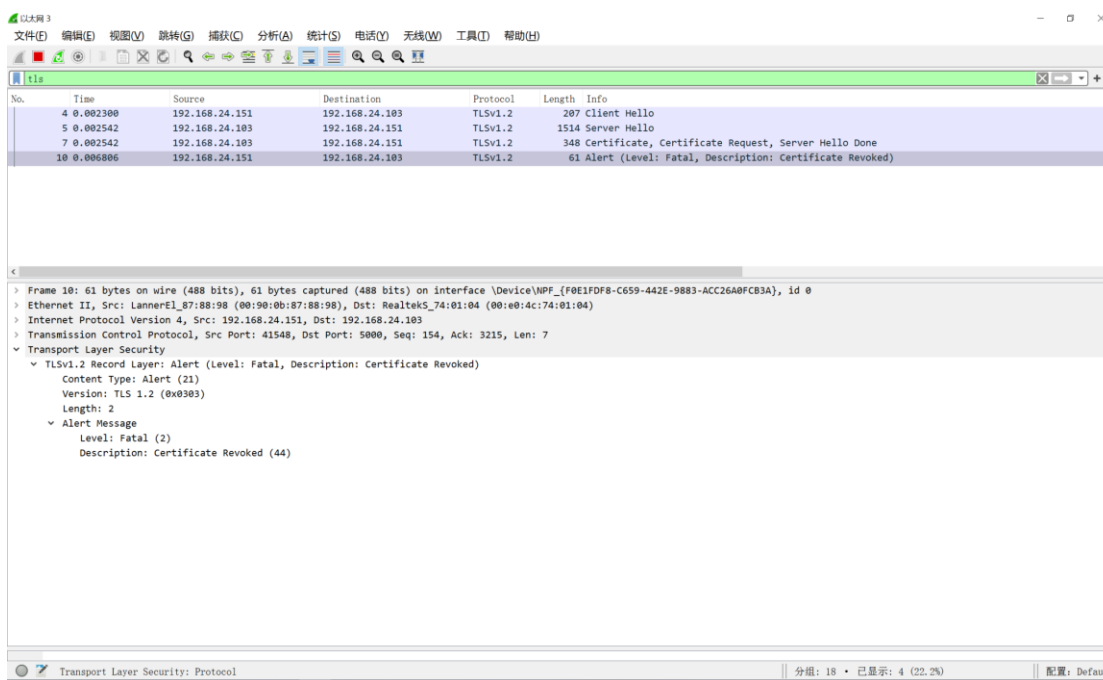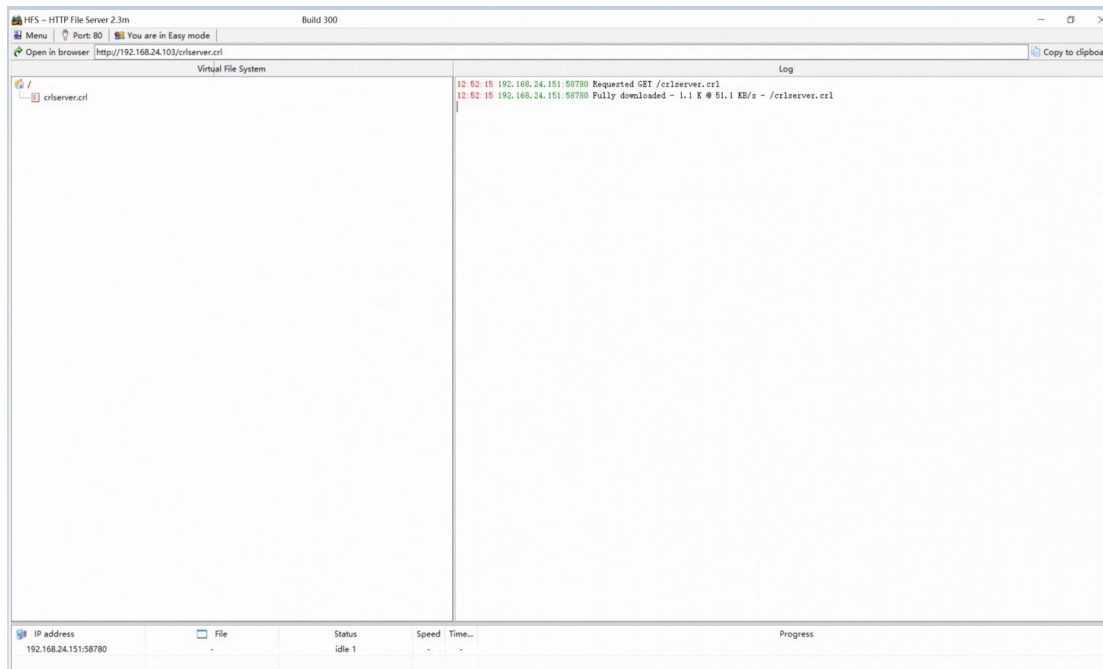

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

### 8.3 WINNF.FT.C.SCS.3

正在捕获 (以太网 3)

文件(F) 编辑(E) 视图(V) 跳转(G) 捕获(C) 分析(A) 统计(S) 电话(U) 无线(W) 工具(T) 帮助(H)

No.	Time	Source	Destination	Protocol	Length	Info
6	0.007608	192.168.24.151	192.168.24.103	TLSv1.2	207	Client Hello
7	0.014293	192.168.24.103	192.168.24.151	TLSv1.2	1514	Server Hello
9	0.014293	192.168.24.103	192.168.24.151	TLSv1.2	212	Certificate, Certificate Request, Server Hello Done
12	0.017294	192.168.24.151	192.168.24.103	TLSv1.2	61	Alert (Level: Fatal, Description: Certificate Expired)

< Frame 12: 61 bytes on wire (488 bits), 61 bytes captured (488 bits) on interface \Device\NPF\_{F0E1FDF8-C659-442E-9883-ACC26A8FCB3A}, id 0

> Ethernet II, Src: LannerEl\_87:88:98 (00:90:0b:87:88:98), Dst: RealtekS\_74:01:04 (00:e0:4c:74:01:04)

> Internet Protocol Version 4, Src: 192.168.24.151, Dst: 192.168.24.103

> Transmission Control Protocol, Src Port: 50629, Dst Port: 5000, Seq: 154, Ack: 3079, Len: 7

> Transport Layer Security

    v TLSv1.2 Record Layer: Alert (Level: Fatal, Description: Certificate Expired)

        Content Type: Alert (21)

        Version: TLS 1.2 (0x0303)

        Length: 2

        v Alert Message

            Level: Fatal (2)



            Description: Certificate Expired (45)

以太网 3: (live capture in progress)      分组: 16 • 已显示: 4 (25.0%)      配置: Default





## 8.4 WINNF.FT.C.SCS.4

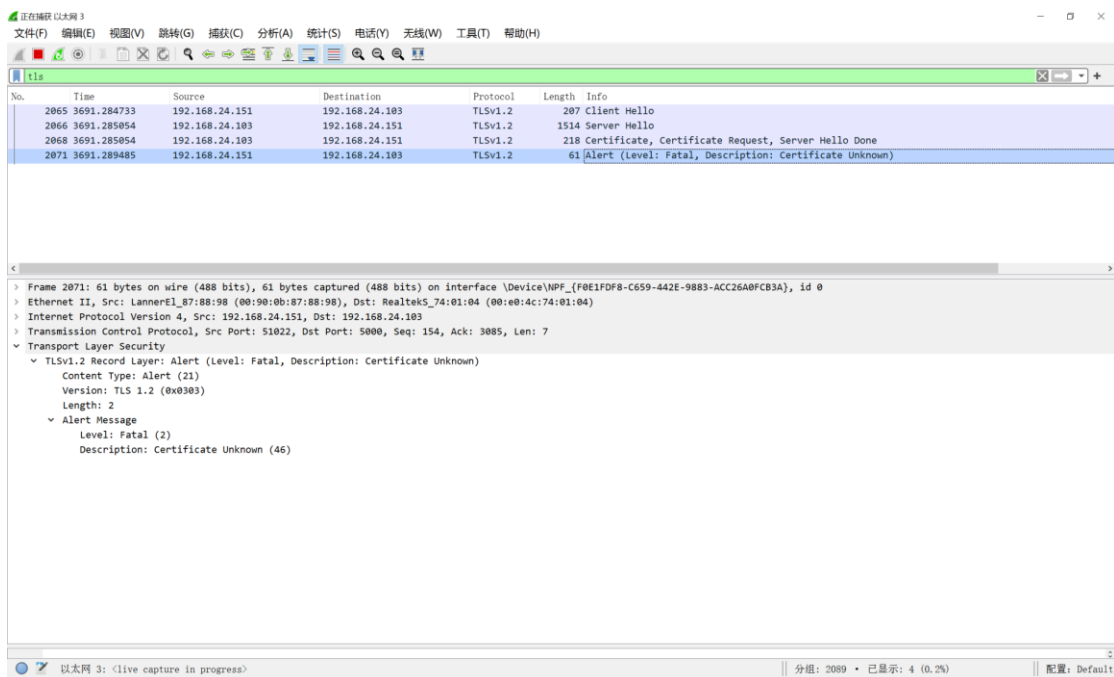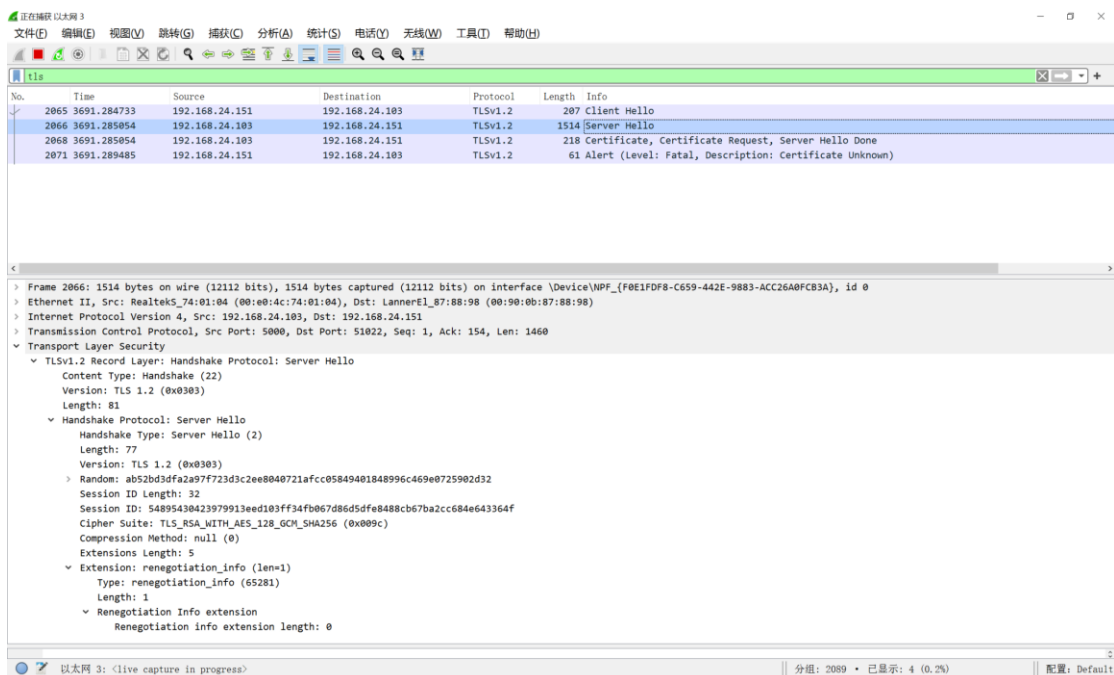


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

## 8.5 WINNF.FT.C.SCS.5

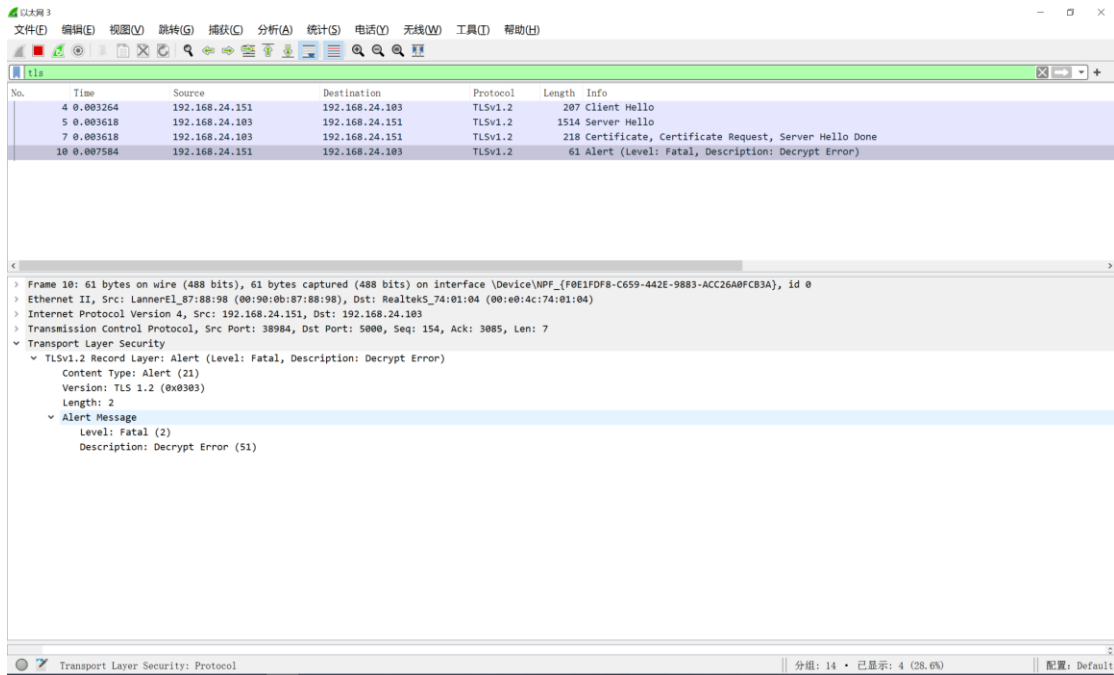

No.	Time	Source	Destination	Protocol	Length	Info
4	0.003264	192.168.24.151	192.168.24.103	TLSv1.2	207	Client Hello
5	0.003618	192.168.24.103	192.168.24.151	TLSv1.2	1514	Server Hello
7	0.003618	192.168.24.103	192.168.24.151	TLSv1.2	218	Certificate, Certificate Request, Server Hello Done
10	0.007584	192.168.24.151	192.168.24.103	TLSv1.2	61	Alert (Level: Fatal, Description: Decrypt Error)

Frame 10: 61 bytes on wire (488 bits), 61 bytes captured (488 bits) on interface \Device\NPF\_{F0E1FDF8-C659-442E-9883-ACC26A8FCB3A}, id 0  
 Ethernet II, Src: LannerEl\_87:88:98 (00:90:0b:87:88:98), Dst: RealtekS\_74:01:04 (00:e0:4c:74:01:04)  
 Internet Protocol Version 4, Src: 192.168.24.151, Dst: 192.168.24.103  
 Transmission Control Protocol, Src Port: 38984, Dst Port: 5000, Seq: 154, Ack: 3085, Len: 7  
 Transport Layer Security  
 TLSv1.2 Record Layer: Alert (Level: Fatal, Description: Decrypt Error)  
 Content Type: Alert (21)  
 Version: TLS 1.2 (0x0303)  
 Length: 2  
 Alert Message  
 Level: Fatal (2)  
 Description: Decrypt Error (51)



## 9 Photographs

### 9.1 EUT Constructional Details (EUT Photos)

Please Refer to external and internal photos for details.

- End of the Report -



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (China) (Shenzhen) CSTC Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com