



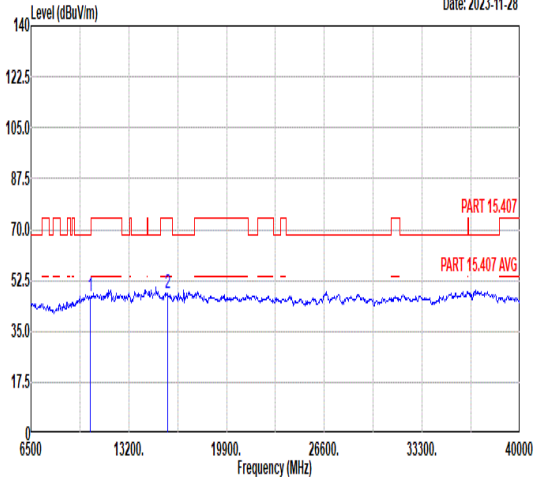




Mode	27																																	
	Band Edge - R																																	
	UNII 2A_5.25-5.35_802.11ax HE80_CHCH58_Full RU_5290MHz																																	
ANT	CDD 1+2																																	
Pol.	Vertical	Fundamental																																
Peak	Level (dBuV/m) Date: 2023-11-27 Frequency (MHz) <table><thead><tr><th></th><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5358.00</td><td>66.10</td><td>74.00</td><td>-7.90</td><td>56.35</td><td>34.58</td><td>8.35</td><td>33.18</td><td>274</td><td>359 Peak</td></tr></tbody></table>		Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5358.00	66.10	74.00	-7.90	56.35	34.58	8.35	33.18	274	359 Peak	Blank
	Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																								
1	5358.00	66.10	74.00	-7.90	56.35	34.58	8.35	33.18	274	359 Peak																								
Avg	Level (dBuV/m) Date: 2023-11-27 Frequency (MHz) <table><thead><tr><th></th><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5352.96</td><td>53.84</td><td>54.00</td><td>-0.16</td><td>44.09</td><td>34.58</td><td>8.34</td><td>33.17</td><td>274</td><td>359 Average</td></tr></tbody></table>		Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5352.96	53.84	54.00	-0.16	44.09	34.58	8.34	33.17	274	359 Average	Blank
	Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																								
1	5352.96	53.84	54.00	-0.16	44.09	34.58	8.34	33.17	274	359 Average																								

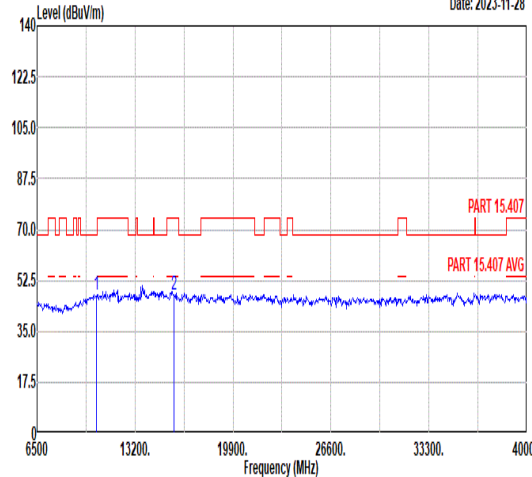

Mode	27																																																																																																	
	Harmonic																																																																																																	
	UNII 2A_5.25-5.35_802.11ax HE80_CHCH58_Full RU_5290MHz																																																																																																	
ANT	CDD 1+2																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	Level (dBuV/m) Date: 2023-11-28  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 10580.00</td><td>47.04</td><td>68.30</td><td>-21.26</td><td>57.15</td><td>37.76</td><td>10.89</td><td>58.76</td><td>--</td><td>-- Peak</td></tr><tr><td>2 15870.00</td><td>47.85</td><td>74.00</td><td>-26.15</td><td>53.75</td><td>40.66</td><td>12.71</td><td>59.27</td><td>--</td><td>-- Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10580.00	47.04	68.30	-21.26	57.15	37.76	10.89	58.76	--	-- Peak	2 15870.00	47.85	74.00	-26.15	53.75	40.66	12.71	59.27	--	-- Peak	Level (dBuV/m) Date: 2023-11-28  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 10580.00</td><td>47.34</td><td>68.30</td><td>-20.96</td><td>57.45</td><td>37.76</td><td>10.89</td><td>58.76</td><td>--</td><td>-- Peak</td></tr><tr><td>2 15870.00</td><td>47.59</td><td>74.00</td><td>-26.41</td><td>53.49</td><td>40.66</td><td>12.71</td><td>59.27</td><td>--</td><td>-- Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10580.00	47.34	68.30	-20.96	57.45	37.76	10.89	58.76	--	-- Peak	2 15870.00	47.59	74.00	-26.41	53.49	40.66	12.71	59.27	--	-- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																										
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1 10580.00	47.04	68.30	-21.26	57.15	37.76	10.89	58.76	--	-- Peak																																																																																									
2 15870.00	47.85	74.00	-26.15	53.75	40.66	12.71	59.27	--	-- Peak																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1 10580.00	47.34	68.30	-20.96	57.45	37.76	10.89	58.76	--	-- Peak																																																																																									
2 15870.00	47.59	74.00	-26.41	53.49	40.66	12.71	59.27	--	-- Peak																																																																																									

Note: Only the worst case has assessed testing for up to 40GHz.


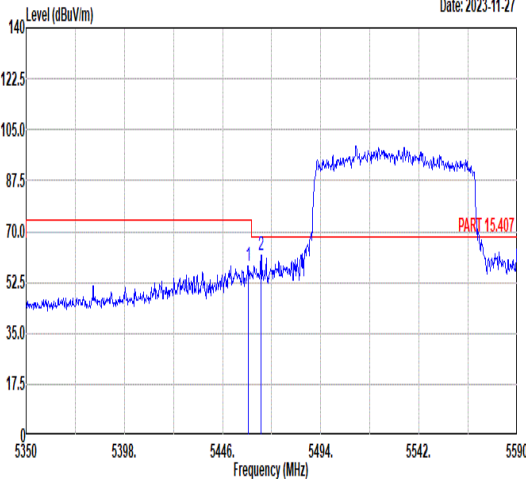
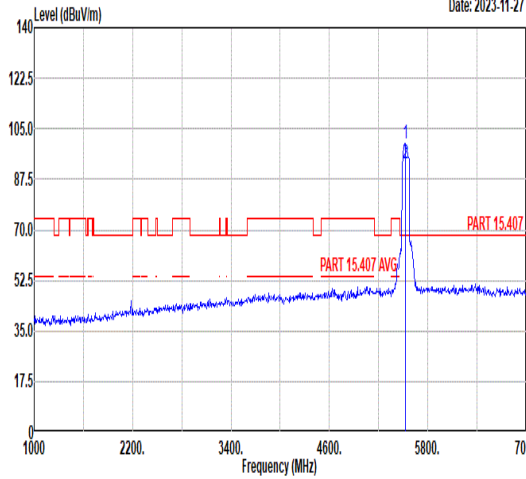
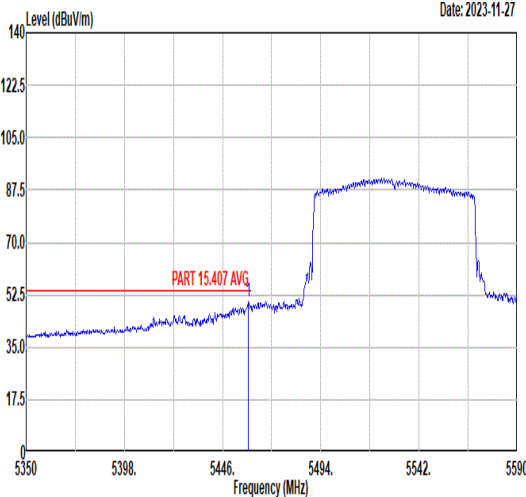


Mode	28																																																																																																		
	Band Edge - L																																																																																																		
	UNII 2C_5.47-5.725_802.11ax HE80_CHCH106_Full RU_5530MHz																																																																																																		
ANT	CDD 1+2																																																																																																		
Pol.	Horizontal					Fundamental																																																																																													
Peak																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 5458.72</td><td>58.20</td><td>74.00</td><td>-15.80</td><td>48.48</td><td>34.66</td><td>8.41</td><td>33.35</td><td>100 357 Peak</td></tr><tr><td>2 5464.72</td><td>61.98</td><td>68.30</td><td>-6.32</td><td>52.27</td><td>34.67</td><td>8.40</td><td>33.36</td><td>100 357 Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5458.72	58.20	74.00	-15.80	48.48	34.66	8.41	33.35	100 357 Peak	2 5464.72	61.98	68.30	-6.32	52.27	34.67	8.40	33.36	100 357 Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 5530.00</td><td>100.07</td><td>-----</td><td>-----</td><td>90.40</td><td>34.74</td><td>8.32</td><td>33.39</td><td>100 357 Peak</td></tr><tr><td>2 5530.00</td><td>93.17</td><td>-----</td><td>-----</td><td>83.50</td><td>34.74</td><td>8.32</td><td>33.39</td><td>100 357 Average</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5530.00	100.07	-----	-----	90.40	34.74	8.32	33.39	100 357 Peak	2 5530.00	93.17	-----	-----	83.50	34.74	8.32	33.39
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																											
1 5458.72	58.20	74.00	-15.80	48.48	34.66	8.41	33.35	100 357 Peak																																																																																											
2 5464.72	61.98	68.30	-6.32	52.27	34.67	8.40	33.36	100 357 Peak																																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																											
1 5530.00	100.07	-----	-----	90.40	34.74	8.32	33.39	100 357 Peak																																																																																											
2 5530.00	93.17	-----	-----	83.50	34.74	8.32	33.39	100 357 Average																																																																																											
Avg						Blank																																																																																													
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 5458.72</td><td>50.01</td><td>54.00</td><td>-3.99</td><td>40.29</td><td>34.66</td><td>8.41</td><td>33.35</td><td>100 357 Average</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5458.72	50.01	54.00	-3.99	40.29	34.66	8.41	33.35	100 357 Average																																																										
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																											
1 5458.72	50.01	54.00	-3.99	40.29	34.66	8.41	33.35	100 357 Average																																																																																											



Mode	28																																									
	Band Edge - R																																									
	UNII 2C_5.47-5.725_802.11ax HE80_CHCH106_Full RU_5530MHz																																									
ANT	CDD 1+2																																									
Pol.	Horizontal	Fundamental																																								
Peak	Date: 2023-11-27 Level (dBuV/m) Frequency (MHz) <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5760.59</td><td>48.52</td><td>68.30</td><td>-19.78</td><td>37.95</td><td>35.11</td><td>8.81</td><td>33.35</td><td>100</td><td>357 Peak</td></tr></table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5760.59	48.52	68.30	-19.78	37.95	35.11	8.81	33.35	100	357 Peak	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor			Remark																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1	5760.59	48.52	68.30	-19.78	37.95	35.11	8.81	33.35	100	357 Peak																																

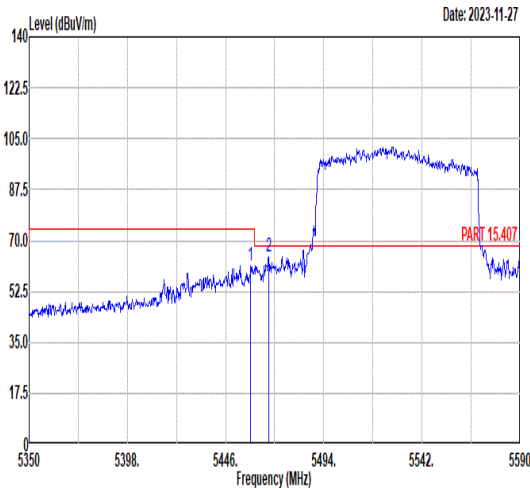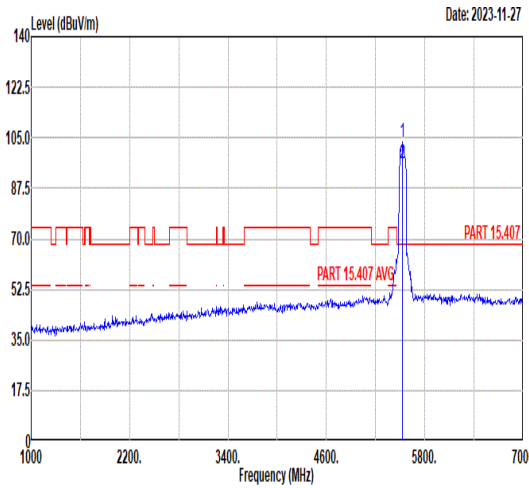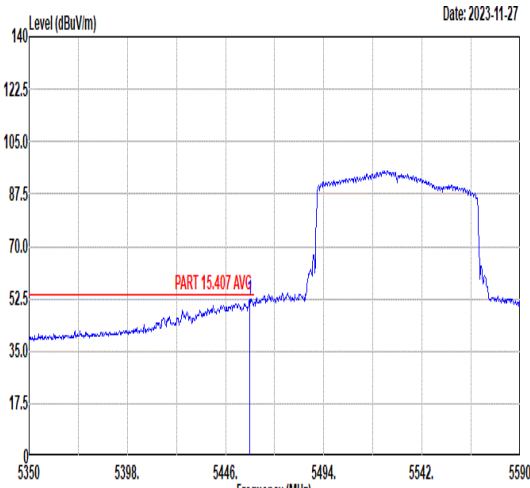
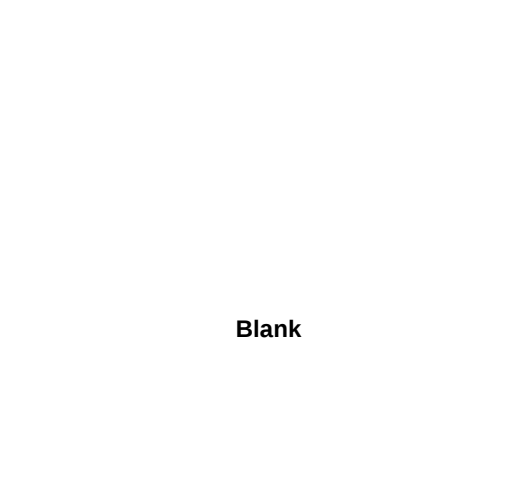


		28																																																																																																														
Mode		Band Edge - L																																																																																																														
		UNII 2C_5.47-5.725_802.11ax HE80_CHCH106_Full RU_5530MHz																																																																																																														
ANT		CDD 1+2																																																																																																														
Pol.		Vertical					Fundamental																																																																																																									
Peak	 Level (dBuV/m) vs Frequency (MHz). The plot shows a signal level around 70 dBuV/m with a peak at 5458.24 MHz. A red line indicates the limit at 70.0 dBuV/m. A blue line indicates the measured level at 5458.24 MHz.					 Level (dBuV/m) vs Frequency (MHz). The plot shows a signal level around 70 dBuV/m with a peak at 5530.00 MHz. A red line indicates the limit at 70.0 dBuV/m. A blue line indicates the measured level at 5530.00 MHz.																																																																																																										
		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5458.24	61.44	74.00	-12.56	51.72	34.66	8.41	33.35	305	360	Peak	2	5467.12	64.40	68.30	-3.90	54.69	34.67	8.40	33.36	305	360	Peak		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5530.00	103.51	-----	-----	93.84	34.74	8.32	33.39	305	360	Peak	2	5530.00	96.39	-----	-----	86.72	34.74	8.32	33.39	305	360	Average				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	5458.24	61.44	74.00	-12.56	51.72	34.66	8.41	33.35	305	360	Peak																																																																																																					
2	5467.12	64.40	68.30	-3.90	54.69	34.67	8.40	33.36	305	360	Peak																																																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	5530.00	103.51	-----	-----	93.84	34.74	8.32	33.39	305	360	Peak																																																																																																					
2	5530.00	96.39	-----	-----	86.72	34.74	8.32	33.39	305	360	Average																																																																																																					
Avg	 Level (dBuV/m) vs Frequency (MHz). The plot shows a signal level around 70 dBuV/m with a peak at 5457.76 MHz. A red line indicates the limit at 70.0 dBuV/m. A blue line indicates the measured level at 5457.76 MHz.					 Level (dBuV/m) vs Frequency (MHz). The plot shows a signal level around 70 dBuV/m with a peak at 5530.00 MHz. A red line indicates the limit at 70.0 dBuV/m. A blue line indicates the measured level at 5530.00 MHz.																																																																																																										
		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5457.76	52.42	54.00	-1.58	42.69	34.66	8.41	33.34	305	360	Average		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5530.00	103.51	-----	-----	93.84	34.74	8.32	33.39	305	360	Peak	2	5530.00	96.39	-----	-----	86.72	34.74	8.32	33.39	305	360	Average	Blank															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	5457.76	52.42	54.00	-1.58	42.69	34.66	8.41	33.34	305	360	Average																																																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	5530.00	103.51	-----	-----	93.84	34.74	8.32	33.39	305	360	Peak																																																																																																					
2	5530.00	96.39	-----	-----	86.72	34.74	8.32	33.39	305	360	Average																																																																																																					






Mode	28																																	
	Band Edge - R																																	
	UNII 2C_5.47-5.725_802.11ax HE80_CHCH106_Full RU_5530MHz																																	
ANT	CDD 1+2																																	
Pol.	Vertical	Fundamental																																
Peak	Date: 2023-11-27 Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>5749.88</td><td>48.34</td><td>68.30</td><td>-19.96</td><td>37.82</td><td>35.10</td><td>8.77</td></tr></table> 33.35 305 360 Peak		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5749.88	48.34	68.30	-19.96	37.82	35.10	8.77	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																											
1	5749.88	48.34	68.30	-19.96	37.82	35.10	8.77																											


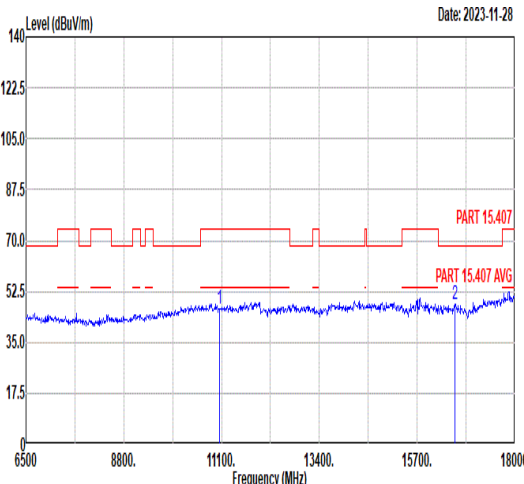
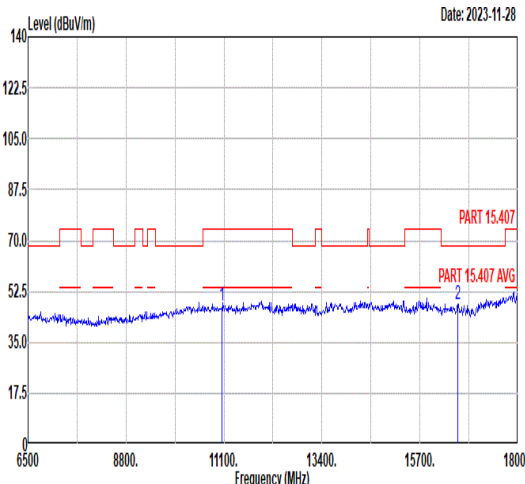


Mode	28																																																																																																																							
	Harmonic																																																																																																																							
	UNII 2C_5.47-5.725_802.11ax HE80_CHCH106_Full RU_5530MHz																																																																																																																							
ANT	CDD 1+2																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																	
Peak Avg																																																																																																																								
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11060.00</td><td>46.63</td><td>74.00</td><td>-27.37</td><td>55.46</td><td>38.16</td><td>11.24</td><td>58.23</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>16590.00</td><td>48.27</td><td>68.30</td><td>-20.03</td><td>53.07</td><td>41.00</td><td>12.95</td><td>58.75</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11060.00	46.63	74.00	-27.37	55.46	38.16	11.24	58.23	--	--	Peak	2	16590.00	48.27	68.30	-20.03	53.07	41.00	12.95	58.75	--	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11060.00</td><td>47.51</td><td>74.00</td><td>-26.49</td><td>56.34</td><td>38.16</td><td>11.24</td><td>58.23</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>16590.00</td><td>47.88</td><td>68.30</td><td>-20.42</td><td>52.68</td><td>41.00</td><td>12.95</td><td>58.75</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11060.00	47.51	74.00	-26.49	56.34	38.16	11.24	58.23	--	--	Peak	2	16590.00	47.88	68.30	-20.42	52.68	41.00	12.95	58.75	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	11060.00	46.63	74.00	-27.37	55.46	38.16	11.24	58.23	--	--	Peak																																																																																																													
2	16590.00	48.27	68.30	-20.03	53.07	41.00	12.95	58.75	--	--	Peak																																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	11060.00	47.51	74.00	-26.49	56.34	38.16	11.24	58.23	--	--	Peak																																																																																																													
2	16590.00	47.88	68.30	-20.42	52.68	41.00	12.95	58.75	--	--	Peak																																																																																																													

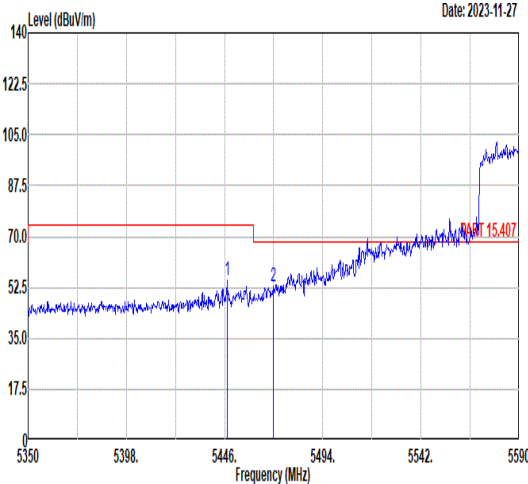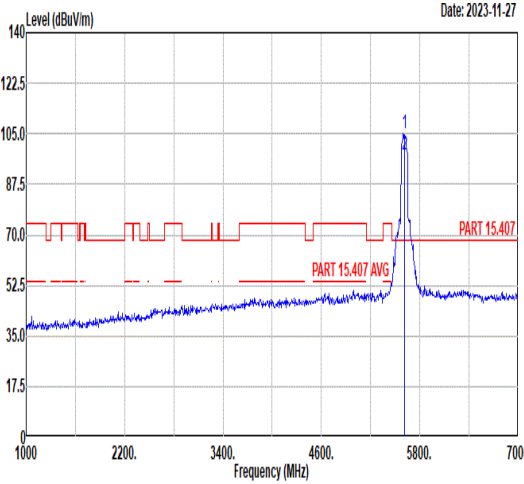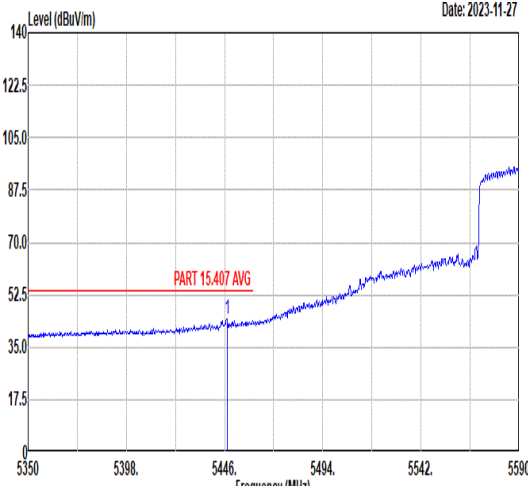

		29																																																																																																										
Mode		Band Edge - L																																																																																																										
		UNII 2C_5.47-5.725_802.11ax HE80_CHCH122_Full RU_5610MHz																																																																																																										
ANT		CDD 1+2																																																																																																										
Pol.		Horizontal					Fundamental																																																																																																					
Peak																																																																																																												
		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5447.20	54.69	74.00	-19.31	44.94	34.65	8.43	33.33	125	354	Peak	2	5469.76	52.88	68.30	-15.42	43.17	34.67	8.40	33.36	125	354	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5610.00</td><td>105.17</td><td>-----</td><td>-----</td><td>95.43</td><td>34.87</td><td>8.25</td><td>33.38</td><td>125</td><td>354</td><td>Peak</td></tr><tr><td>2</td><td>5610.00</td><td>97.96</td><td>-----</td><td>-----</td><td>88.22</td><td>34.87</td><td>8.25</td><td>33.38</td><td>125</td><td>354</td><td>Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5610.00	105.17	-----	-----	95.43	34.87	8.25	33.38	125	354	Peak	2	5610.00	97.96	-----	-----	88.22	34.87	8.25	33.38	125	354
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																			
1	5447.20	54.69	74.00	-19.31	44.94	34.65	8.43	33.33	125	354	Peak																																																																																																	
2	5469.76	52.88	68.30	-15.42	43.17	34.67	8.40	33.36	125	354	Peak																																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																			
1	5610.00	105.17	-----	-----	95.43	34.87	8.25	33.38	125	354	Peak																																																																																																	
2	5610.00	97.96	-----	-----	88.22	34.87	8.25	33.38	125	354	Average																																																																																																	
Avg						Blank																																																																																																						
		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5447.44	44.30	54.00	-9.70	34.55	34.65	8.43	33.33	125	354	Average																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																			
1	5447.44	44.30	54.00	-9.70	34.55	34.65	8.43	33.33	125	354	Average																																																																																																	

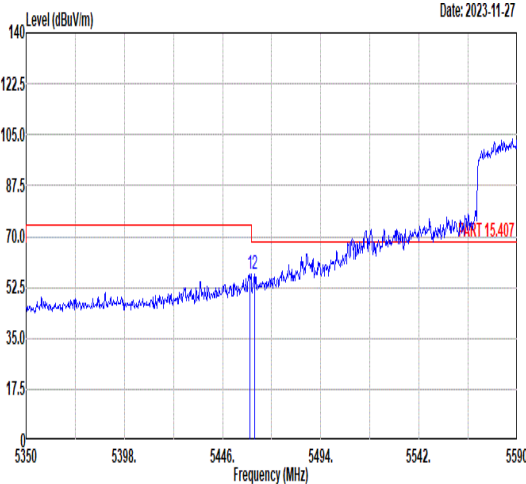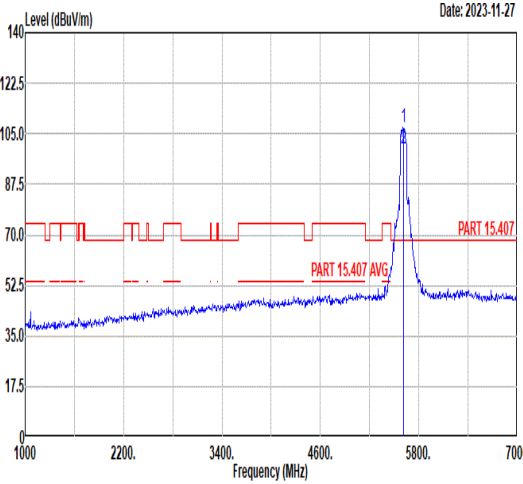
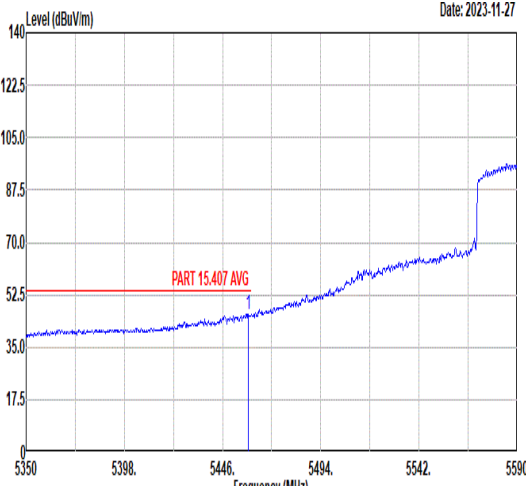


		29																																																																																																		
Mode		Band Edge - L																																																																																																		
		UNII 2C_5.47-5.725_802.11ax HE80_CHCH122_Full RU_5610MHz																																																																																																		
ANT		CDD 1+2																																																																																																		
Pol.		Vertical					Fundamental																																																																																													
Peak	 Date: 2023-11-27					 Date: 2023-11-27																																																																																														
		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5459.44	57.04	74.00	-16.96	47.32	34.66	8.41	33.35	314	136 Peak	2	5461.60	57.28	68.30	-11.02	47.55	34.67	8.41	33.35	314	136 Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5610.00</td><td>107.02</td><td>-----</td><td>-----</td><td>97.28</td><td>34.87</td><td>8.25</td><td>33.38</td><td>314</td><td>136 Peak</td></tr><tr><td>2</td><td>5610.00</td><td>99.92</td><td>-----</td><td>-----</td><td>90.18</td><td>34.87</td><td>8.25</td><td>33.38</td><td>314</td><td>136 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5610.00	107.02	-----	-----	97.28	34.87	8.25	33.38	314	136 Peak	2	5610.00	99.92	-----	-----	90.18	34.87	8.25	33.38	314
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																											
1	5459.44	57.04	74.00	-16.96	47.32	34.66	8.41	33.35	314	136 Peak																																																																																										
2	5461.60	57.28	68.30	-11.02	47.55	34.67	8.41	33.35	314	136 Peak																																																																																										
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																											
1	5610.00	107.02	-----	-----	97.28	34.87	8.25	33.38	314	136 Peak																																																																																										
2	5610.00	99.92	-----	-----	90.18	34.87	8.25	33.38	314	136 Average																																																																																										
Avg	 Date: 2023-11-27					Blank																																																																																														
		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5458.72	46.14	54.00	-7.86	36.42	34.66	8.41	33.35	314	136 Average																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																											
1	5458.72	46.14	54.00	-7.86	36.42	34.66	8.41	33.35	314	136 Average																																																																																										



Mode	29																																									
	Band Edge - R																																									
	UNII 2C_5.47-5.725_802.11ax HE80_CHCH122_Full RU_5610MHz																																									
ANT	CDD 1+2																																									
Pol.	Vertical	Fundamental																																								
Peak	Date: 2023-11-27 Level (dBuV/m) Frequency (MHz) <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5726.33</td><td>62.27</td><td>68.30</td><td>-6.03</td><td>51.88</td><td>35.06</td><td>8.68</td><td>33.35</td><td>314</td><td>136 Peak</td></tr></table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5726.33	62.27	68.30	-6.03	51.88	35.06	8.68	33.35	314	136 Peak	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor			Remark																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1	5726.33	62.27	68.30	-6.03	51.88	35.06	8.68	33.35	314	136 Peak																																

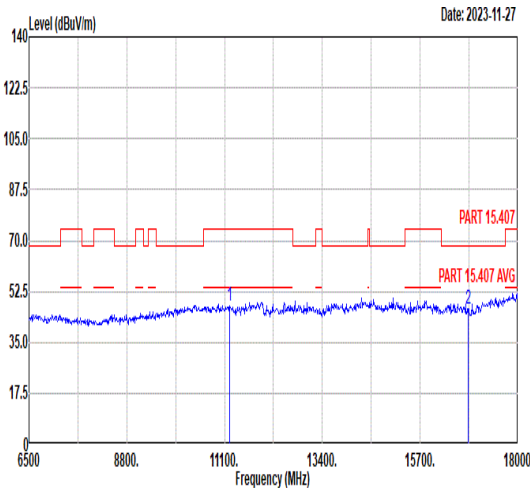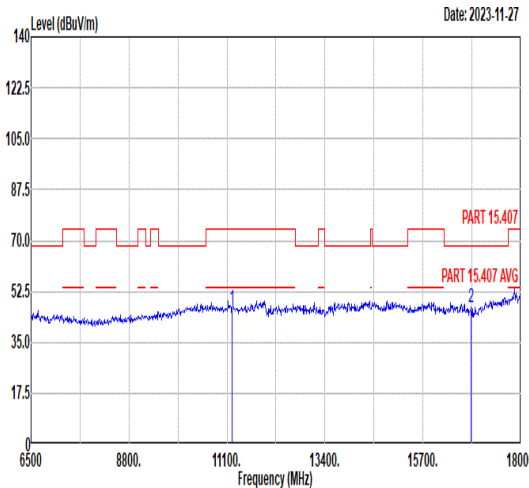

Mode	29																																																																																																															
	Harmonic																																																																																																															
	UNII 2C_5.47-5.725_802.11ax HE80_CHCH122_Full RU_5610MHz																																																																																																															
ANT	CDD 1+2																																																																																																															
Pol.	Horizontal						Vertical																																																																																																									
Peak Avg																																																																																																																
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 11220.00</td><td>47.43</td><td>74.00</td><td>-26.57</td><td>55.84</td><td>38.32</td><td>11.32</td><td>58.05</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2 16830.00</td><td>46.25</td><td>68.30</td><td>-22.05</td><td>50.56</td><td>41.12</td><td>13.05</td><td>58.48</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11220.00	47.43	74.00	-26.57	55.84	38.32	11.32	58.05	--	--	Peak	2 16830.00	46.25	68.30	-22.05	50.56	41.12	13.05	58.48	--	--	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 11220.00</td><td>46.66</td><td>74.00</td><td>-27.34</td><td>55.07</td><td>38.32</td><td>11.32</td><td>58.05</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2 16830.00</td><td>46.79</td><td>68.30</td><td>-21.51</td><td>51.10</td><td>41.12</td><td>13.05</td><td>58.48</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11220.00	46.66	74.00	-27.34	55.07	38.32	11.32	58.05	--	--	Peak	2 16830.00	46.79	68.30	-21.51	51.10	41.12	13.05	58.48	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1 11220.00	47.43	74.00	-26.57	55.84	38.32	11.32	58.05	--	--	Peak																																																																																																						
2 16830.00	46.25	68.30	-22.05	50.56	41.12	13.05	58.48	--	--	Peak																																																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1 11220.00	46.66	74.00	-27.34	55.07	38.32	11.32	58.05	--	--	Peak																																																																																																						
2 16830.00	46.79	68.30	-21.51	51.10	41.12	13.05	58.48	--	--	Peak																																																																																																						



Mode	30																																																																																																																																								
	Band Edge																																																																																																																																								
	UNII 3_5.725-5.85_802.11a_CHCH149_5745MHz																																																																																																																																								
ANT	CDD 1+2																																																																																																																																								
Pol.	Horizontal						Fundamental																																																																																																																																		
Peak	Date: 2023-11-28 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5646.20</td><td>51.11</td><td>68.30</td><td>-17.19</td><td>41.17</td><td>34.93</td><td>8.38</td><td>33.37</td><td>100</td><td>350 Peak</td></tr><tr><td>2</td><td>5699.00</td><td>66.76</td><td>104.47</td><td>-37.71</td><td>56.53</td><td>35.01</td><td>8.58</td><td>33.36</td><td>100</td><td>350 Peak</td></tr><tr><td>3</td><td>5719.60</td><td>78.53</td><td>110.69</td><td>-32.16</td><td>68.19</td><td>35.05</td><td>8.65</td><td>33.36</td><td>100</td><td>350 Peak</td></tr><tr><td>4</td><td>5725.00</td><td>81.34</td><td>122.20</td><td>-40.86</td><td>70.97</td><td>35.06</td><td>8.67</td><td>33.36</td><td>100</td><td>350 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5646.20	51.11	68.30	-17.19	41.17	34.93	8.38	33.37	100	350 Peak	2	5699.00	66.76	104.47	-37.71	56.53	35.01	8.58	33.36	100	350 Peak	3	5719.60	78.53	110.69	-32.16	68.19	35.05	8.65	33.36	100	350 Peak	4	5725.00	81.34	122.20	-40.86	70.97	35.06	8.67	33.36	100	350 Peak	Date: 2023-11-28 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5745.00</td><td>111.18</td><td>-----</td><td>-----</td><td>100.69</td><td>35.09</td><td>8.75</td><td>33.35</td><td>100</td><td>350 Peak</td></tr><tr><td>2</td><td>5745.00</td><td>104.50</td><td>-----</td><td>-----</td><td>94.01</td><td>35.09</td><td>8.75</td><td>33.35</td><td>100</td><td>350 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	111.18	-----	-----	100.69	35.09	8.75	33.35	100	350 Peak	2	5745.00	104.50	-----	-----	94.01	35.09	8.75	33.35	100	350 Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																
		Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	5646.20	51.11	68.30	-17.19	41.17	34.93	8.38	33.37	100	350 Peak																																																																																																																															
2	5699.00	66.76	104.47	-37.71	56.53	35.01	8.58	33.36	100	350 Peak																																																																																																																															
3	5719.60	78.53	110.69	-32.16	68.19	35.05	8.65	33.36	100	350 Peak																																																																																																																															
4	5725.00	81.34	122.20	-40.86	70.97	35.06	8.67	33.36	100	350 Peak																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																	
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	5745.00	111.18	-----	-----	100.69	35.09	8.75	33.35	100	350 Peak																																																																																																																															
2	5745.00	104.50	-----	-----	94.01	35.09	8.75	33.35	100	350 Average																																																																																																																															





Mode	30										
	Band Edge										
	UNII 3_5.725-5.85_802.11a_CHCH149_5745MHz										
ANT	CDD 1+2										
Pol.	Vertical										
Peak											





Mode	30																																																																																																					
	Harmonic																																																																																																					
	UNII 3_5.725-5.85_802.11a_CHCH149_5745MHz																																																																																																					
ANT	CDD 1+2																																																																																																					
Pol.	Horizontal						Vertical																																																																																															
Peak Avg	Date: 2023-11-28						Date: 2023-11-28																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>11490.00</td><td>47.84</td><td>74.00</td><td>-26.16</td><td>55.57</td><td>38.58</td><td>11.45</td><td>57.76 -- -- Peak</td></tr><tr><td>2</td><td>17235.00</td><td>48.38</td><td>68.30</td><td>-19.92</td><td>51.89</td><td>41.29</td><td>13.17</td><td>57.97 -- -- Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	11490.00	47.84	74.00	-26.16	55.57	38.58	11.45	57.76 -- -- Peak	2	17235.00	48.38	68.30	-19.92	51.89	41.29	13.17	57.97 -- -- Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>11490.00</td><td>49.09</td><td>74.00</td><td>-24.91</td><td>56.82</td><td>38.58</td><td>11.45</td><td>57.76 -- -- Peak</td></tr><tr><td>2</td><td>17235.00</td><td>53.37</td><td>68.30</td><td>-14.93</td><td>56.88</td><td>41.29</td><td>13.17</td><td>57.97 -- -- Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	11490.00	49.09	74.00	-24.91	56.82	38.58	11.45	57.76 -- -- Peak	2	17235.00	53.37	68.30	-14.93	56.88	41.29	13.17	57.97 -- -- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1	11490.00	47.84	74.00	-26.16	55.57	38.58	11.45	57.76 -- -- Peak																																																																																														
2	17235.00	48.38	68.30	-19.92	51.89	41.29	13.17	57.97 -- -- Peak																																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1	11490.00	49.09	74.00	-24.91	56.82	38.58	11.45	57.76 -- -- Peak																																																																																														
2	17235.00	53.37	68.30	-14.93	56.88	41.29	13.17	57.97 -- -- Peak																																																																																														

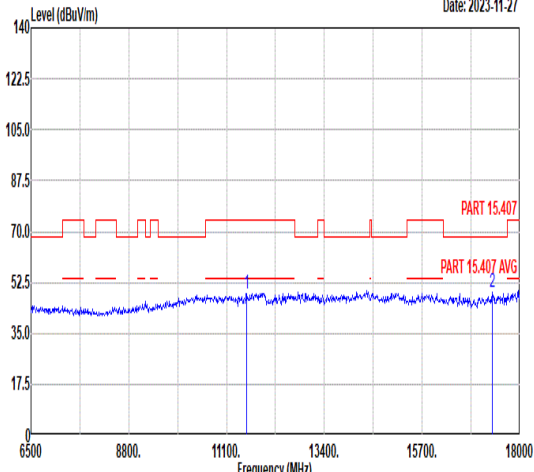
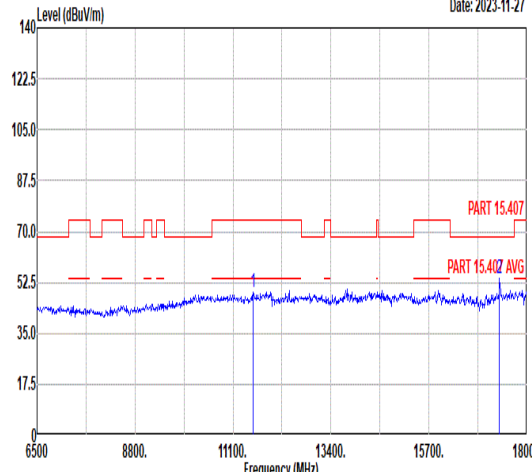


Mode	31																																																																																																															
	Harmonic																																																																																																															
	UNII 3_5.725-5.85_802.11a_CHCH157_5785MHz																																																																																																															
ANT	CDD 1+2																																																																																																															
Pol.	Horizontal						Vertical																																																																																																									
Peak Avg																																																																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11570.00</td><td>48.57</td><td>74.00</td><td>-25.43</td><td>56.07</td><td>38.68</td><td>11.49</td><td>57.67</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17355.00</td><td>49.21</td><td>68.30</td><td>-19.09</td><td>52.47</td><td>41.34</td><td>13.20</td><td>57.80</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11570.00	48.57	74.00	-25.43	56.07	38.68	11.49	57.67	--	Peak	2	17355.00	49.21	68.30	-19.09	52.47	41.34	13.20	57.80	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11570.00</td><td>49.25</td><td>74.00</td><td>-24.75</td><td>56.75</td><td>38.68</td><td>11.49</td><td>57.67</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17355.00</td><td>53.97</td><td>68.30</td><td>-14.33</td><td>57.23</td><td>41.34</td><td>13.20</td><td>57.80</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11570.00	49.25	74.00	-24.75	56.75	38.68	11.49	57.67	--	Peak	2	17355.00	53.97	68.30	-14.33	57.23	41.34	13.20	57.80	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																							
1	11570.00	48.57	74.00	-25.43	56.07	38.68	11.49	57.67	--	Peak																																																																																																						
2	17355.00	49.21	68.30	-19.09	52.47	41.34	13.20	57.80	--	Peak																																																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																							
1	11570.00	49.25	74.00	-24.75	56.75	38.68	11.49	57.67	--	Peak																																																																																																						
2	17355.00	53.97	68.30	-14.33	57.23	41.34	13.20	57.80	--	Peak																																																																																																						

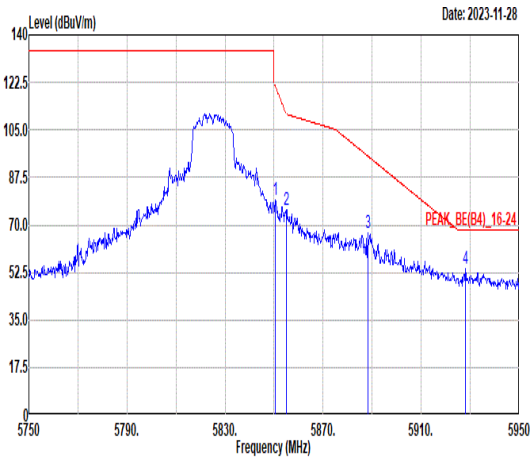
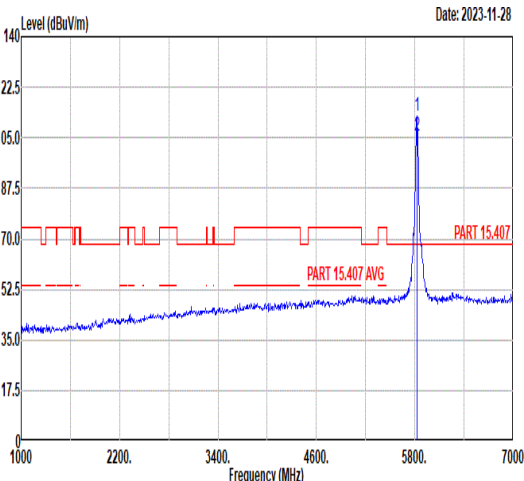


Mode	32																																																																																																																																			
	Band Edge																																																																																																																																			
	UNII 3_5.725-5.85_802.11a_CHCH165_5825MHz																																																																																																																																			
ANT	CDD 1+2																																																																																																																																			
Pol.	Horizontal					Fundamental																																																																																																																														
Peak	 Date: 2023-11-28 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5850.40</td><td>79.27</td><td>121.29</td><td>-42.02</td><td>68.46</td><td>35.26</td><td>8.88</td><td>33.33</td><td>100</td><td>352 Peak</td></tr><tr><td>2</td><td>5855.00</td><td>75.65</td><td>110.80</td><td>-35.15</td><td>64.84</td><td>35.27</td><td>8.87</td><td>33.33</td><td>100</td><td>352 Peak</td></tr><tr><td>3</td><td>5888.40</td><td>67.09</td><td>95.25</td><td>-28.16</td><td>56.26</td><td>35.32</td><td>8.83</td><td>33.32</td><td>100</td><td>352 Peak</td></tr><tr><td>4</td><td>5928.00</td><td>53.99</td><td>68.30</td><td>-14.31</td><td>43.13</td><td>35.39</td><td>8.79</td><td>33.32</td><td>100</td><td>352 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5850.40	79.27	121.29	-42.02	68.46	35.26	8.88	33.33	100	352 Peak	2	5855.00	75.65	110.80	-35.15	64.84	35.27	8.87	33.33	100	352 Peak	3	5888.40	67.09	95.25	-28.16	56.26	35.32	8.83	33.32	100	352 Peak	4	5928.00	53.99	68.30	-14.31	43.13	35.39	8.79	33.32	100	352 Peak	 Date: 2023-11-28 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5825.00</td><td>112.50</td><td>-----</td><td>-----</td><td>101.71</td><td>35.22</td><td>8.91</td><td>33.34</td><td>100</td><td>352 Peak</td></tr><tr><td>2</td><td>5825.00</td><td>105.66</td><td>-----</td><td>-----</td><td>94.87</td><td>35.22</td><td>8.91</td><td>33.34</td><td>100</td><td>352 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	112.50	-----	-----	101.71	35.22	8.91	33.34	100	352 Peak	2	5825.00	105.66	-----	-----	94.87	35.22	8.91	33.34	100	352 Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																											
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5850.40	79.27	121.29	-42.02	68.46	35.26	8.88	33.33	100	352 Peak																																																																																																																										
2	5855.00	75.65	110.80	-35.15	64.84	35.27	8.87	33.33	100	352 Peak																																																																																																																										
3	5888.40	67.09	95.25	-28.16	56.26	35.32	8.83	33.32	100	352 Peak																																																																																																																										
4	5928.00	53.99	68.30	-14.31	43.13	35.39	8.79	33.32	100	352 Peak																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5825.00	112.50	-----	-----	101.71	35.22	8.91	33.34	100	352 Peak																																																																																																																										
2	5825.00	105.66	-----	-----	94.87	35.22	8.91	33.34	100	352 Average																																																																																																																										

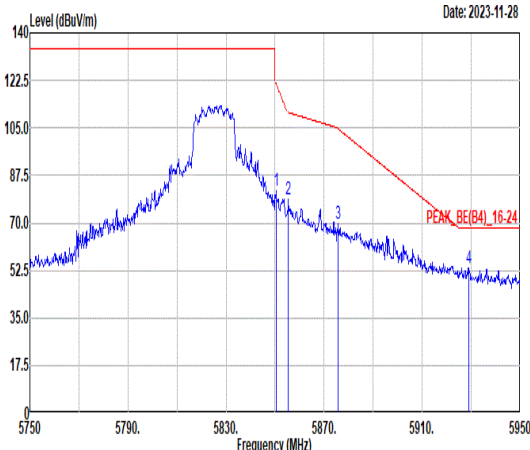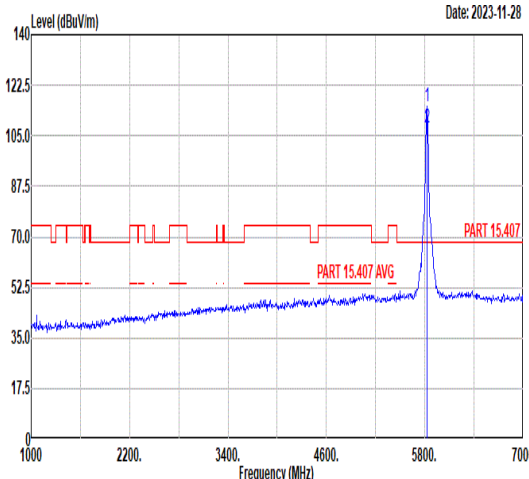

Mode	32																																																																																																																																														
	Band Edge																																																																																																																																														
	UNII 3_5.725-5.85_802.11a_CHCH165_5825MHz																																																																																																																																														
ANT	CDD 1+2																																																																																																																																														
Pol.	Vertical						Fundamental																																																																																																																																								
Peak																																																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5850.40</td><td>81.71</td><td>121.29</td><td>-39.58</td><td>70.90</td><td>35.26</td><td>8.88</td><td>33.33</td><td>100</td><td>248</td><td>Peak</td></tr><tr><td>2</td><td>5855.40</td><td>78.73</td><td>110.69</td><td>-31.96</td><td>67.92</td><td>35.27</td><td>8.87</td><td>33.33</td><td>100</td><td>248</td><td>Peak</td></tr><tr><td>3</td><td>5875.80</td><td>69.66</td><td>104.61</td><td>-34.95</td><td>58.84</td><td>35.30</td><td>8.85</td><td>33.33</td><td>100</td><td>248</td><td>Peak</td></tr><tr><td>4</td><td>5929.00</td><td>53.40</td><td>68.30</td><td>-14.90</td><td>42.55</td><td>35.39</td><td>8.78</td><td>33.32</td><td>100</td><td>248</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5850.40	81.71	121.29	-39.58	70.90	35.26	8.88	33.33	100	248	Peak	2	5855.40	78.73	110.69	-31.96	67.92	35.27	8.87	33.33	100	248	Peak	3	5875.80	69.66	104.61	-34.95	58.84	35.30	8.85	33.33	100	248	Peak	4	5929.00	53.40	68.30	-14.90	42.55	35.39	8.78	33.32	100	248	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5825.00</td><td>115.04</td><td>-----</td><td>-----</td><td>104.25</td><td>35.22</td><td>8.91</td><td>33.34</td><td>100</td><td>248</td><td>Peak</td></tr><tr><td>2</td><td>5825.00</td><td>107.89</td><td>-----</td><td>-----</td><td>97.10</td><td>35.22</td><td>8.91</td><td>33.34</td><td>100</td><td>248</td><td>Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	115.04	-----	-----	104.25	35.22	8.91	33.34	100	248	Peak	2	5825.00	107.89	-----	-----	97.10	35.22	8.91	33.34	100	248	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																					
1	5850.40	81.71	121.29	-39.58	70.90	35.26	8.88	33.33	100	248	Peak																																																																																																																																				
2	5855.40	78.73	110.69	-31.96	67.92	35.27	8.87	33.33	100	248	Peak																																																																																																																																				
3	5875.80	69.66	104.61	-34.95	58.84	35.30	8.85	33.33	100	248	Peak																																																																																																																																				
4	5929.00	53.40	68.30	-14.90	42.55	35.39	8.78	33.32	100	248	Peak																																																																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																							
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																					
1	5825.00	115.04	-----	-----	104.25	35.22	8.91	33.34	100	248	Peak																																																																																																																																				
2	5825.00	107.89	-----	-----	97.10	35.22	8.91	33.34	100	248	Average																																																																																																																																				

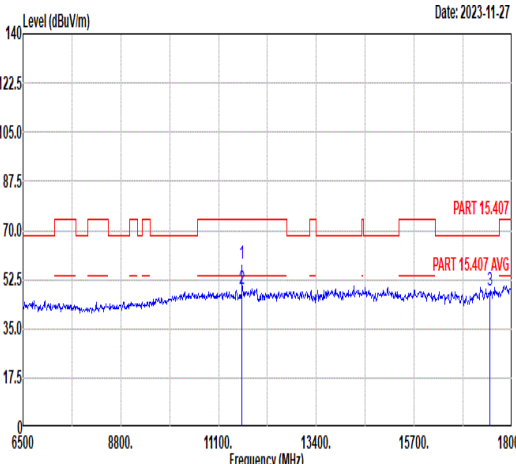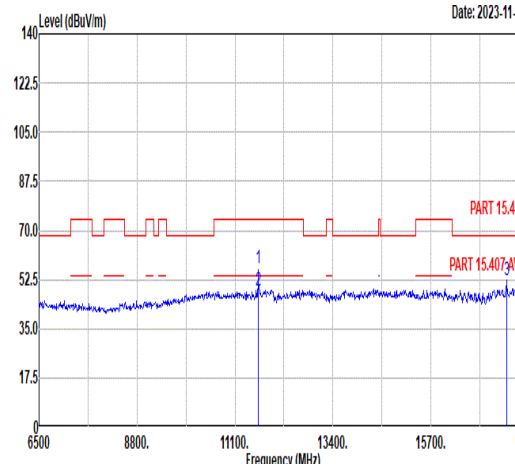

Mode	32																																																																																																																							
	Harmonic																																																																																																																							
	UNII 3_5.725-5.85_802.11a_CHCH165_5825MHz																																																																																																																							
ANT	CDD 1+2																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																	
Peak Avg																																																																																																																								
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>11650.00</td><td>58.15</td><td>74.00</td><td>-15.85</td><td>65.42</td><td>38.78</td><td>11.53</td><td>57.58 133 269 Peak</td></tr><tr><td>2</td><td>11650.00</td><td>48.95</td><td>54.00</td><td>-5.05</td><td>56.22</td><td>38.78</td><td>11.53</td><td>57.58 133 269 Average</td></tr><tr><td>3</td><td>17475.00</td><td>48.34</td><td>68.30</td><td>-19.96</td><td>51.35</td><td>41.39</td><td>13.23</td><td>57.63 -- -- Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	11650.00	58.15	74.00	-15.85	65.42	38.78	11.53	57.58 133 269 Peak	2	11650.00	48.95	54.00	-5.05	56.22	38.78	11.53	57.58 133 269 Average	3	17475.00	48.34	68.30	-19.96	51.35	41.39	13.23	57.63 -- -- Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>11650.00</td><td>56.65</td><td>74.00</td><td>-17.35</td><td>63.92</td><td>38.78</td><td>11.53</td><td>57.58 344 134 Peak</td></tr><tr><td>2</td><td>11650.00</td><td>48.65</td><td>54.00</td><td>-5.35</td><td>55.92</td><td>38.78</td><td>11.53</td><td>57.58 344 134 Average</td></tr><tr><td>3</td><td>17475.00</td><td>52.29</td><td>68.30</td><td>-16.01</td><td>55.30</td><td>41.39</td><td>13.23</td><td>57.63 -- -- Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	11650.00	56.65	74.00	-17.35	63.92	38.78	11.53	57.58 344 134 Peak	2	11650.00	48.65	54.00	-5.35	55.92	38.78	11.53	57.58 344 134 Average	3	17475.00	52.29	68.30	-16.01	55.30	41.39	13.23	57.63 -- -- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																	
1	11650.00	58.15	74.00	-15.85	65.42	38.78	11.53	57.58 133 269 Peak																																																																																																																
2	11650.00	48.95	54.00	-5.05	56.22	38.78	11.53	57.58 133 269 Average																																																																																																																
3	17475.00	48.34	68.30	-19.96	51.35	41.39	13.23	57.63 -- -- Peak																																																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																	
1	11650.00	56.65	74.00	-17.35	63.92	38.78	11.53	57.58 344 134 Peak																																																																																																																
2	11650.00	48.65	54.00	-5.35	55.92	38.78	11.53	57.58 344 134 Average																																																																																																																
3	17475.00	52.29	68.30	-16.01	55.30	41.39	13.23	57.63 -- -- Peak																																																																																																																





Mode	33																																																																																																																																														
	Band Edge																																																																																																																																														
	UNII 3_5.725-5.85_802.11ax HE20_CHCH149_Full RU_5745MHz																																																																																																																																														
ANT	CDD 1+2																																																																																																																																														
Pol.	Horizontal						Fundamental																																																																																																																																								
Peak	Date: 2023-11-27 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5647.20</td><td>49.41</td><td>68.30</td><td>-18.89</td><td>39.46</td><td>34.93</td><td>8.39</td><td>33.37</td><td>297</td><td>342</td><td>Peak</td></tr><tr><td>2</td><td>5700.00</td><td>71.73</td><td>105.20</td><td>-33.47</td><td>61.49</td><td>35.02</td><td>8.58</td><td>33.36</td><td>297</td><td>342</td><td>Peak</td></tr><tr><td>3</td><td>5716.20</td><td>79.27</td><td>109.74</td><td>-30.47</td><td>68.95</td><td>35.04</td><td>8.64</td><td>33.36</td><td>297</td><td>342</td><td>Peak</td></tr><tr><td>4</td><td>5724.80</td><td>84.34</td><td>121.74</td><td>-37.40</td><td>73.97</td><td>35.06</td><td>8.67</td><td>33.36</td><td>297</td><td>342</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5647.20	49.41	68.30	-18.89	39.46	34.93	8.39	33.37	297	342	Peak	2	5700.00	71.73	105.20	-33.47	61.49	35.02	8.58	33.36	297	342	Peak	3	5716.20	79.27	109.74	-30.47	68.95	35.04	8.64	33.36	297	342	Peak	4	5724.80	84.34	121.74	-37.40	73.97	35.06	8.67	33.36	297	342	Peak	Date: 2023-11-28 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5745.00</td><td>112.81</td><td>-----</td><td>-----</td><td>102.32</td><td>35.09</td><td>8.75</td><td>33.35</td><td>297</td><td>342</td><td>Peak</td></tr><tr><td>2</td><td>5745.00</td><td>105.62</td><td>-----</td><td>-----</td><td>95.13</td><td>35.09</td><td>8.75</td><td>33.35</td><td>297</td><td>342</td><td>Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	112.81	-----	-----	102.32	35.09	8.75	33.35	297	342	Peak	2	5745.00	105.62	-----	-----	95.13	35.09	8.75	33.35	297	342	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																							
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																					
1	5647.20	49.41	68.30	-18.89	39.46	34.93	8.39	33.37	297	342	Peak																																																																																																																																				
2	5700.00	71.73	105.20	-33.47	61.49	35.02	8.58	33.36	297	342	Peak																																																																																																																																				
3	5716.20	79.27	109.74	-30.47	68.95	35.04	8.64	33.36	297	342	Peak																																																																																																																																				
4	5724.80	84.34	121.74	-37.40	73.97	35.06	8.67	33.36	297	342	Peak																																																																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																							
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																					
1	5745.00	112.81	-----	-----	102.32	35.09	8.75	33.35	297	342	Peak																																																																																																																																				
2	5745.00	105.62	-----	-----	95.13	35.09	8.75	33.35	297	342	Average																																																																																																																																				



Mode	33																																																																																																																																					
	Band Edge																																																																																																																																					
	UNII 3_5.725-5.85_802.11ax HE20_CHCH149_Full RU_5745MHz																																																																																																																																					
ANT	CDD 1+2																																																																																																																																					
Pol.	Vertical	Fundamental																																																																																																																																				
Peak	Date: 2023-11-27 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5649.20</td><td>51.43</td><td>68.30</td><td>-16.87</td><td>41.48</td><td>34.93</td><td>8.39</td><td>33.37</td><td>160</td><td>238</td><td>Peak</td></tr><tr><td>2</td><td>5693.80</td><td>69.40</td><td>100.64</td><td>-31.24</td><td>59.19</td><td>35.01</td><td>8.56</td><td>33.36</td><td>160</td><td>238</td><td>Peak</td></tr><tr><td>3</td><td>5719.40</td><td>80.48</td><td>110.63</td><td>-30.15</td><td>70.14</td><td>35.05</td><td>8.65</td><td>33.36</td><td>160</td><td>238</td><td>Peak</td></tr><tr><td>4</td><td>5725.00</td><td>86.88</td><td>122.20</td><td>-35.32</td><td>76.51</td><td>35.06</td><td>8.67</td><td>33.36</td><td>160</td><td>238</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5649.20	51.43	68.30	-16.87	41.48	34.93	8.39	33.37	160	238	Peak	2	5693.80	69.40	100.64	-31.24	59.19	35.01	8.56	33.36	160	238	Peak	3	5719.40	80.48	110.63	-30.15	70.14	35.05	8.65	33.36	160	238	Peak	4	5725.00	86.88	122.20	-35.32	76.51	35.06	8.67	33.36	160	238	Peak	Date: 2023-11-27 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5745.00</td><td>115.89</td><td>-----</td><td>-----</td><td>105.40</td><td>35.09</td><td>8.75</td><td>33.35</td><td>160</td><td>238</td><td>Peak</td></tr><tr><td>2</td><td>5745.00</td><td>108.77</td><td>-----</td><td>-----</td><td>98.28</td><td>35.09</td><td>8.75</td><td>33.35</td><td>160</td><td>238</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	115.89	-----	-----	105.40	35.09	8.75	33.35	160	238	Peak	2	5745.00	108.77	-----	-----	98.28	35.09	8.75	33.35	160	238	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																													
		Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																												
1	5649.20	51.43	68.30	-16.87	41.48	34.93	8.39	33.37	160	238	Peak																																																																																																																											
2	5693.80	69.40	100.64	-31.24	59.19	35.01	8.56	33.36	160	238	Peak																																																																																																																											
3	5719.40	80.48	110.63	-30.15	70.14	35.05	8.65	33.36	160	238	Peak																																																																																																																											
4	5725.00	86.88	122.20	-35.32	76.51	35.06	8.67	33.36	160	238	Peak																																																																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																														
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																												
1	5745.00	115.89	-----	-----	105.40	35.09	8.75	33.35	160	238	Peak																																																																																																																											
2	5745.00	108.77	-----	-----	98.28	35.09	8.75	33.35	160	238	Average																																																																																																																											

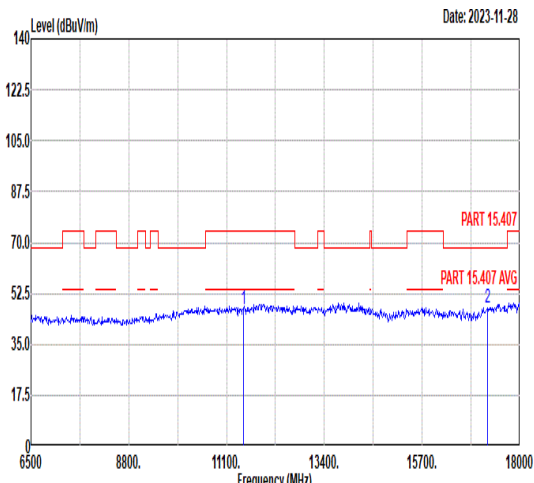
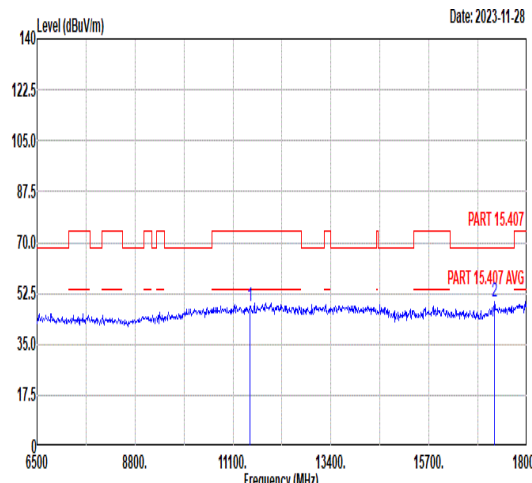


Mode	33																																																																																																																							
	Harmonic																																																																																																																							
	UNII 3_5.725-5.85_802.11ax HE20_CHCH149_Full RU_5745MHz																																																																																																																							
ANT	CDD 1+2																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																	
Peak Avg																																																																																																																								
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11490.00</td><td>47.16</td><td>74.00</td><td>-26.84</td><td>54.89</td><td>38.58</td><td>11.45</td><td>57.76</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17235.00</td><td>47.59</td><td>68.30</td><td>-20.71</td><td>51.10</td><td>41.29</td><td>13.17</td><td>57.97</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11490.00	47.16	74.00	-26.84	54.89	38.58	11.45	57.76	--	--	Peak	2	17235.00	47.59	68.30	-20.71	51.10	41.29	13.17	57.97	--	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11490.00</td><td>48.27</td><td>74.00</td><td>-25.73</td><td>56.00</td><td>38.58</td><td>11.45</td><td>57.76</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17235.00</td><td>49.92</td><td>68.30</td><td>-18.38</td><td>53.43</td><td>41.29</td><td>13.17</td><td>57.97</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11490.00	48.27	74.00	-25.73	56.00	38.58	11.45	57.76	--	--	Peak	2	17235.00	49.92	68.30	-18.38	53.43	41.29	13.17	57.97	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	11490.00	47.16	74.00	-26.84	54.89	38.58	11.45	57.76	--	--	Peak																																																																																																													
2	17235.00	47.59	68.30	-20.71	51.10	41.29	13.17	57.97	--	--	Peak																																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	11490.00	48.27	74.00	-25.73	56.00	38.58	11.45	57.76	--	--	Peak																																																																																																													
2	17235.00	49.92	68.30	-18.38	53.43	41.29	13.17	57.97	--	--	Peak																																																																																																													



Mode	34																																																																																			
	Harmonic																																																																																			
	UNII 3_5.725-5.85_802.11ax HE20_CHCH157_Full RU_5785MHz																																																																																			
ANT	CDD 1+2																																																																																			
Pol.	Horizontal						Vertical																																																																													
Peak Avg	Date: 2023-11-27						Date: 2023-11-27																																																																													
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td>1 11570.00</td><td>48.93</td><td>74.00</td><td>-25.07</td><td>56.43</td><td>38.68</td><td>11.49</td><td>57.67</td><td>-- -- Peak</td></tr><tr><td>2 17355.00</td><td>49.19</td><td>68.30</td><td>-19.11</td><td>52.45</td><td>41.34</td><td>13.20</td><td>57.80</td><td>-- -- Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	1 11570.00	48.93	74.00	-25.07	56.43	38.68	11.49	57.67	-- -- Peak	2 17355.00	49.19	68.30	-19.11	52.45	41.34	13.20	57.80	-- -- Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td>1 11570.00</td><td>50.34</td><td>74.00</td><td>-23.66</td><td>57.84</td><td>38.68</td><td>11.49</td><td>57.67</td><td>-- -- Peak</td></tr><tr><td>2 17355.00</td><td>52.05</td><td>68.30</td><td>-16.25</td><td>55.31</td><td>41.34</td><td>13.20</td><td>57.80</td><td>-- -- Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	1 11570.00	50.34	74.00	-23.66	57.84	38.68	11.49	57.67	-- -- Peak	2 17355.00	52.05	68.30	-16.25	55.31	41.34	13.20	57.80	-- -- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																												
1 11570.00	48.93	74.00	-25.07	56.43	38.68	11.49	57.67	-- -- Peak																																																																												
2 17355.00	49.19	68.30	-19.11	52.45	41.34	13.20	57.80	-- -- Peak																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																												
1 11570.00	50.34	74.00	-23.66	57.84	38.68	11.49	57.67	-- -- Peak																																																																												
2 17355.00	52.05	68.30	-16.25	55.31	41.34	13.20	57.80	-- -- Peak																																																																												
<table><thead><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>11570.00</td><td>48.93</td><td>74.00</td><td>-25.07</td><td>56.43</td><td>38.68</td><td>11.49</td><td>57.67</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17355.00</td><td>49.19</td><td>68.30</td><td>-19.11</td><td>52.45</td><td>41.34</td><td>13.20</td><td>57.80</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11570.00	48.93	74.00	-25.07	56.43	38.68	11.49	57.67	--	--	Peak	2	17355.00	49.19	68.30	-19.11	52.45	41.34	13.20	57.80	--	--	Peak	<table><thead><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>11570.00</td><td>50.34</td><td>74.00</td><td>-23.66</td><td>57.84</td><td>38.68</td><td>11.49</td><td>57.67</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17355.00</td><td>52.05</td><td>68.30</td><td>-16.25</td><td>55.31</td><td>41.34</td><td>13.20</td><td>57.80</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11570.00	50.34	74.00	-23.66	57.84	38.68	11.49	57.67	--	--	Peak	2	17355.00	52.05	68.30	-16.25	55.31	41.34	13.20	57.80	--	--	Peak	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	11570.00	48.93	74.00	-25.07	56.43	38.68	11.49	57.67	--	--	Peak																																																																									
2	17355.00	49.19	68.30	-19.11	52.45	41.34	13.20	57.80	--	--	Peak																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	11570.00	50.34	74.00	-23.66	57.84	38.68	11.49	57.67	--	--	Peak																																																																									
2	17355.00	52.05	68.30	-16.25	55.31	41.34	13.20	57.80	--	--	Peak																																																																									

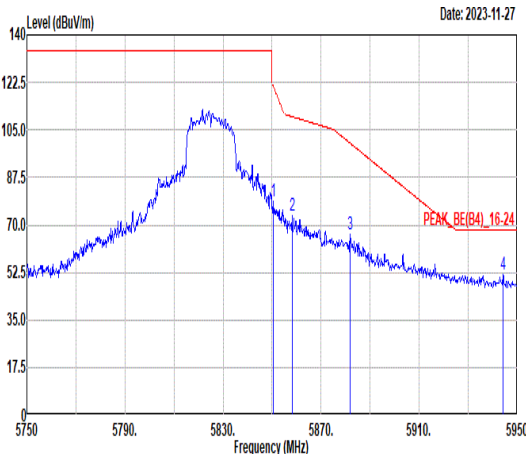
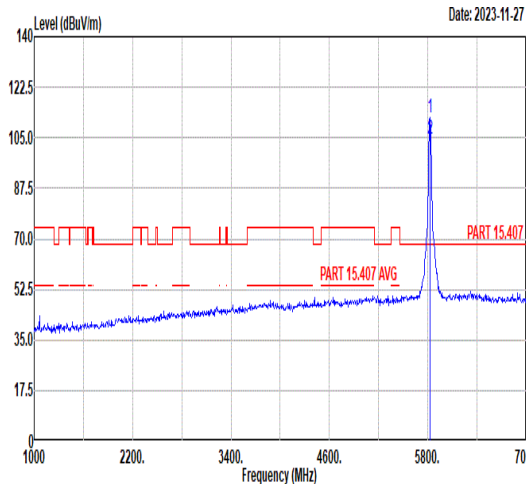


Mode	35																																																																																																																																			
	Band Edge																																																																																																																																			
	UNII 3_5.725-5.85_802.11ax HE20_CHCH165_Full RU_5825MHz																																																																																																																																			
ANT	CDD 1+2																																																																																																																																			
Pol.	Horizontal					Fundamental																																																																																																																														
Peak	Level (dBuV/m) Date: 2023-11-27  575057905830587059105950 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5850.40</td><td>78.56</td><td>121.29</td><td>-42.73</td><td>67.75</td><td>35.26</td><td>8.88</td><td>33.33</td><td>270</td><td>350 Peak</td></tr><tr><td>2</td><td>5858.20</td><td>73.18</td><td>109.90</td><td>-36.72</td><td>62.37</td><td>35.27</td><td>8.87</td><td>33.33</td><td>270</td><td>350 Peak</td></tr><tr><td>3</td><td>5881.80</td><td>66.53</td><td>100.15</td><td>-33.62</td><td>55.71</td><td>35.31</td><td>8.84</td><td>33.33</td><td>270</td><td>350 Peak</td></tr><tr><td>4</td><td>5944.20</td><td>51.51</td><td>68.30</td><td>-16.79</td><td>40.64</td><td>35.41</td><td>8.77</td><td>33.31</td><td>270</td><td>350 Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5850.40	78.56	121.29	-42.73	67.75	35.26	8.88	33.33	270	350 Peak	2	5858.20	73.18	109.90	-36.72	62.37	35.27	8.87	33.33	270	350 Peak	3	5881.80	66.53	100.15	-33.62	55.71	35.31	8.84	33.33	270	350 Peak	4	5944.20	51.51	68.30	-16.79	40.64	35.41	8.77	33.31	270	350 Peak	Level (dBuV/m) Date: 2023-11-27  100022003400460058007000 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5825.00</td><td>111.88</td><td>-----</td><td>-----</td><td>101.09</td><td>35.22</td><td>8.91</td><td>33.34</td><td>270</td><td>350 Peak</td></tr><tr><td>2</td><td>5825.00</td><td>104.74</td><td>-----</td><td>-----</td><td>93.95</td><td>35.22</td><td>8.91</td><td>33.34</td><td>270</td><td>350 Average</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	111.88	-----	-----	101.09	35.22	8.91	33.34	270	350 Peak	2	5825.00	104.74	-----	-----	93.95	35.22	8.91	33.34	270	350 Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5850.40	78.56	121.29	-42.73	67.75	35.26	8.88	33.33	270	350 Peak																																																																																																																										
2	5858.20	73.18	109.90	-36.72	62.37	35.27	8.87	33.33	270	350 Peak																																																																																																																										
3	5881.80	66.53	100.15	-33.62	55.71	35.31	8.84	33.33	270	350 Peak																																																																																																																										
4	5944.20	51.51	68.30	-16.79	40.64	35.41	8.77	33.31	270	350 Peak																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5825.00	111.88	-----	-----	101.09	35.22	8.91	33.34	270	350 Peak																																																																																																																										
2	5825.00	104.74	-----	-----	93.95	35.22	8.91	33.34	270	350 Average																																																																																																																										



Mode	35																																																																																																																																								
	Band Edge																																																																																																																																								
	UNII 3_5.725-5.85_802.11ax HE20_CHCH165_Full RU_5825MHz																																																																																																																																								
ANT	CDD 1+2																																																																																																																																								
Pol.	Vertical						Fundamental																																																																																																																																		
Peak	Level (dBuV/m) Date: 2023-11-27 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5852.40</td><td>79.48</td><td>116.73</td><td>-37.25</td><td>68.68</td><td>35.26</td><td>8.87</td><td>33.33</td><td>153</td><td>238 Peak</td></tr><tr><td>2</td><td>5860.00</td><td>79.49</td><td>109.40</td><td>-29.91</td><td>68.67</td><td>35.28</td><td>8.87</td><td>33.33</td><td>153</td><td>238 Peak</td></tr><tr><td>3</td><td>5877.60</td><td>72.38</td><td>103.27</td><td>-30.89</td><td>61.57</td><td>35.30</td><td>8.84</td><td>33.33</td><td>153</td><td>238 Peak</td></tr><tr><td>4</td><td>5927.40</td><td>54.42</td><td>68.30</td><td>-13.88</td><td>43.56</td><td>35.39</td><td>8.79</td><td>33.32</td><td>153</td><td>238 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5852.40	79.48	116.73	-37.25	68.68	35.26	8.87	33.33	153	238 Peak	2	5860.00	79.49	109.40	-29.91	68.67	35.28	8.87	33.33	153	238 Peak	3	5877.60	72.38	103.27	-30.89	61.57	35.30	8.84	33.33	153	238 Peak	4	5927.40	54.42	68.30	-13.88	43.56	35.39	8.79	33.32	153	238 Peak	Level (dBuV/m) Date: 2023-11-27 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5825.00</td><td>116.20</td><td>-----</td><td>-----</td><td>105.41</td><td>35.22</td><td>8.91</td><td>33.34</td><td>153</td><td>238 Peak</td></tr><tr><td>2</td><td>5825.00</td><td>109.47</td><td>-----</td><td>-----</td><td>98.68</td><td>35.22</td><td>8.91</td><td>33.34</td><td>153</td><td>238 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	116.20	-----	-----	105.41	35.22	8.91	33.34	153	238 Peak	2	5825.00	109.47	-----	-----	98.68	35.22	8.91	33.34	153	238 Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																
		Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	5852.40	79.48	116.73	-37.25	68.68	35.26	8.87	33.33	153	238 Peak																																																																																																																															
2	5860.00	79.49	109.40	-29.91	68.67	35.28	8.87	33.33	153	238 Peak																																																																																																																															
3	5877.60	72.38	103.27	-30.89	61.57	35.30	8.84	33.33	153	238 Peak																																																																																																																															
4	5927.40	54.42	68.30	-13.88	43.56	35.39	8.79	33.32	153	238 Peak																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																	
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	5825.00	116.20	-----	-----	105.41	35.22	8.91	33.34	153	238 Peak																																																																																																																															
2	5825.00	109.47	-----	-----	98.68	35.22	8.91	33.34	153	238 Average																																																																																																																															

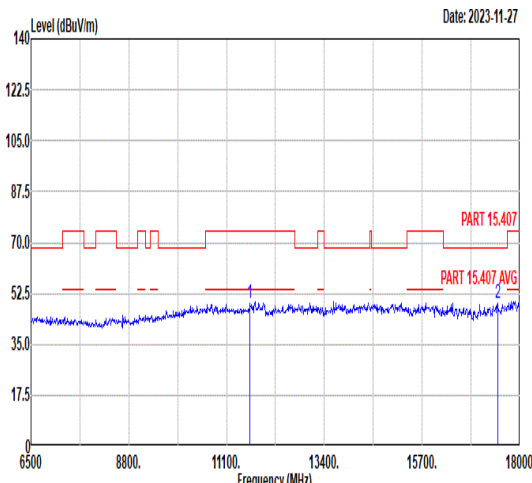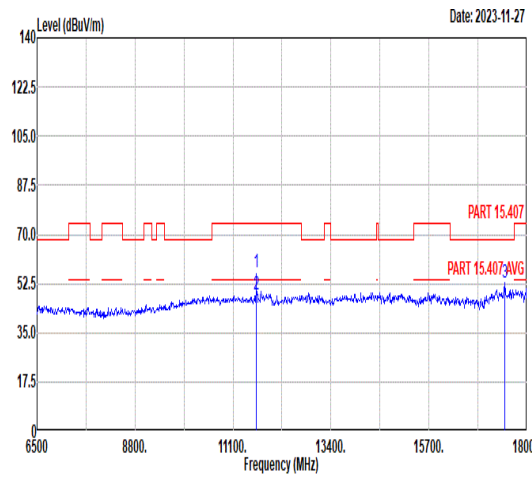

Mode	35																																																																																																																		
	Harmonic																																																																																																																		
	UNII 3_5.725-5.85_802.11ax HE20_CHCH165_Full RU_5825MHz																																																																																																																		
ANT	CDD 1+2																																																																																																																		
Pol.	Horizontal								Vertical																																																																																																										
Peak Avg																																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th></th></tr><tr><td>1</td><td>11650.00</td><td>49.18</td><td>74.00</td><td>-24.82</td><td>56.45</td><td>38.78</td><td>11.53</td><td>57.58 -- Peak</td></tr><tr><td>2</td><td>17475.00</td><td>48.94</td><td>68.30</td><td>-19.36</td><td>51.95</td><td>41.39</td><td>13.23</td><td>57.63 -- Peak</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB		1	11650.00	49.18	74.00	-24.82	56.45	38.78	11.53	57.58 -- Peak	2	17475.00	48.94	68.30	-19.36	51.95	41.39	13.23	57.63 -- Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th></th></tr><tr><td>1</td><td>11650.00</td><td>56.75</td><td>74.00</td><td>-17.25</td><td>64.02</td><td>38.78</td><td>11.53</td><td>57.58 326 144 Peak</td></tr><tr><td>2</td><td>11650.00</td><td>48.67</td><td>54.00</td><td>-5.33</td><td>55.94</td><td>38.78</td><td>11.53</td><td>57.58 326 144 Average</td></tr><tr><td>3</td><td>17475.00</td><td>53.04</td><td>68.30</td><td>-15.26</td><td>56.05</td><td>41.39</td><td>13.23</td><td>57.63 -- Peak</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB		1	11650.00	56.75	74.00	-17.25	64.02	38.78	11.53	57.58 326 144 Peak	2	11650.00	48.67	54.00	-5.33	55.94	38.78	11.53	57.58 326 144 Average	3	17475.00	53.04	68.30	-15.26	56.05	41.39	13.23	57.63 -- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																											
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																																												
1	11650.00	49.18	74.00	-24.82	56.45	38.78	11.53	57.58 -- Peak																																																																																																											
2	17475.00	48.94	68.30	-19.36	51.95	41.39	13.23	57.63 -- Peak																																																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																																												
1	11650.00	56.75	74.00	-17.25	64.02	38.78	11.53	57.58 326 144 Peak																																																																																																											
2	11650.00	48.67	54.00	-5.33	55.94	38.78	11.53	57.58 326 144 Average																																																																																																											
3	17475.00	53.04	68.30	-15.26	56.05	41.39	13.23	57.63 -- Peak																																																																																																											



Mode	36																																																																									
	Band Edge - R																																																																									
	UNII 3_5.725-5.85_802.11ax HE40_CHCH151_Full RU_5755MHz																																																																									
ANT	CDD 1+2																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	Date: 2023-11-27 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.60</td><td>61.13</td><td>111.71</td><td>-50.58</td><td>50.32</td><td>35.27</td><td>8.87</td><td>33.33</td><td>385</td><td>10 Peak</td></tr><tr><td>2</td><td>5861.60</td><td>63.11</td><td>108.95</td><td>-45.84</td><td>52.30</td><td>35.28</td><td>8.86</td><td>33.33</td><td>385</td><td>10 Peak</td></tr><tr><td>3</td><td>5881.60</td><td>59.56</td><td>100.30</td><td>-40.74</td><td>48.74</td><td>35.31</td><td>8.84</td><td>33.33</td><td>385</td><td>10 Peak</td></tr><tr><td>4</td><td>5934.80</td><td>49.20</td><td>68.30</td><td>-19.10</td><td>38.33</td><td>35.40</td><td>8.78</td><td>33.31</td><td>385</td><td>10 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.60	61.13	111.71	-50.58	50.32	35.27	8.87	33.33	385	10 Peak	2	5861.60	63.11	108.95	-45.84	52.30	35.28	8.86	33.33	385	10 Peak	3	5881.60	59.56	100.30	-40.74	48.74	35.31	8.84	33.33	385	10 Peak	4	5934.80	49.20	68.30	-19.10	38.33	35.40	8.78	33.31	385	10 Peak	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5854.60	61.13	111.71	-50.58	50.32	35.27	8.87	33.33	385	10 Peak																																																																
2	5861.60	63.11	108.95	-45.84	52.30	35.28	8.86	33.33	385	10 Peak																																																																
3	5881.60	59.56	100.30	-40.74	48.74	35.31	8.84	33.33	385	10 Peak																																																																
4	5934.80	49.20	68.30	-19.10	38.33	35.40	8.78	33.31	385	10 Peak																																																																





Mode	36																																																																																				
	Band Edge - L																																																																																				
	UNII 3_5.725-5.85_802.11ax HE40_CHCH151_Full RU_5755MHz																																																																																				
ANT	CDD 1+2																																																																																				
Pol.	Vertical																																																																																				
Peak	Date: 2023-11-27 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5648.20</td><td>59.27</td><td>68.30</td><td>-9.03</td><td>49.32</td><td>34.93</td><td>8.39</td><td>33.37</td><td>183</td><td>40 Peak</td></tr><tr><td>2</td><td>5697.00</td><td>76.49</td><td>103.00</td><td>-26.51</td><td>66.27</td><td>35.01</td><td>8.57</td><td>33.36</td><td>183</td><td>40 Peak</td></tr><tr><td>3</td><td>5714.60</td><td>82.99</td><td>109.29</td><td>-26.30</td><td>72.67</td><td>35.04</td><td>8.64</td><td>33.36</td><td>183</td><td>40 Peak</td></tr><tr><td>4</td><td>5721.40</td><td>85.55</td><td>113.99</td><td>-28.44</td><td>75.20</td><td>35.05</td><td>8.66</td><td>33.36</td><td>183</td><td>40 Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5648.20	59.27	68.30	-9.03	49.32	34.93	8.39	33.37	183	40 Peak	2	5697.00	76.49	103.00	-26.51	66.27	35.01	8.57	33.36	183	40 Peak	3	5714.60	82.99	109.29	-26.30	72.67	35.04	8.64	33.36	183	40 Peak	4	5721.40	85.55	113.99	-28.44	75.20	35.05	8.66	33.36	183	40 Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																													
		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5648.20	59.27	68.30	-9.03	49.32	34.93	8.39	33.37	183	40 Peak																																																																											
2	5697.00	76.49	103.00	-26.51	66.27	35.01	8.57	33.36	183	40 Peak																																																																											
3	5714.60	82.99	109.29	-26.30	72.67	35.04	8.64	33.36	183	40 Peak																																																																											
4	5721.40	85.55	113.99	-28.44	75.20	35.05	8.66	33.36	183	40 Peak																																																																											
	Date: 2023-11-27 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5755.00</td><td>111.45</td><td>-----</td><td>-----</td><td>100.91</td><td>35.11</td><td>8.78</td><td>33.35</td><td>183</td><td>40 Peak</td></tr><tr><td>2</td><td>5755.00</td><td>103.10</td><td>-----</td><td>-----</td><td>92.56</td><td>35.11</td><td>8.78</td><td>33.35</td><td>183</td><td>40 Average</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	111.45	-----	-----	100.91	35.11	8.78	33.35	183	40 Peak	2	5755.00	103.10	-----	-----	92.56	35.11	8.78	33.35	183	40 Average																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																														
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5755.00	111.45	-----	-----	100.91	35.11	8.78	33.35	183	40 Peak																																																																											
2	5755.00	103.10	-----	-----	92.56	35.11	8.78	33.35	183	40 Average																																																																											



Mode	36																																																																																																																						
	Harmonic																																																																																																																						
	UNII 3_5.725-5.85_802.11ax HE40_CHCH151_Full RU_5755MHz																																																																																																																						
ANT	CDD 1+2																																																																																																																						
Pol.	Horizontal						Vertical																																																																																																																
Peak Avg	Level (dBuV/m) Date: 2023-11-28 11510.00 17265.00 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11510.00</td><td>46.93</td><td>74.00</td><td>-27.07</td><td>54.61</td><td>38.60</td><td>11.46</td><td>57.74</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17265.00</td><td>49.76</td><td>68.30</td><td>-18.54</td><td>53.20</td><td>41.31</td><td>13.18</td><td>57.93</td><td>--</td><td>--</td><td>Peak</td></tr></table> Level (dBuV/m) Date: 2023-11-28 11510.00 17265.00 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11510.00</td><td>48.21</td><td>74.00</td><td>-25.79</td><td>55.89</td><td>38.60</td><td>11.46</td><td>57.74</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17265.00</td><td>52.92</td><td>68.30</td><td>-15.38</td><td>56.36</td><td>41.31</td><td>13.18</td><td>57.93</td><td>--</td><td>--</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11510.00	46.93	74.00	-27.07	54.61	38.60	11.46	57.74	--	--	Peak	2	17265.00	49.76	68.30	-18.54	53.20	41.31	13.18	57.93	--	--	Peak		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11510.00	48.21	74.00	-25.79	55.89	38.60	11.46	57.74	--	--	Peak	2	17265.00	52.92	68.30	-15.38	56.36	41.31	13.18	57.93	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																															
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	11510.00	46.93	74.00	-27.07	54.61	38.60	11.46	57.74	--	--	Peak																																																																																																												
2	17265.00	49.76	68.30	-18.54	53.20	41.31	13.18	57.93	--	--	Peak																																																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	11510.00	48.21	74.00	-25.79	55.89	38.60	11.46	57.74	--	--	Peak																																																																																																												
2	17265.00	52.92	68.30	-15.38	56.36	41.31	13.18	57.93	--	--	Peak																																																																																																												

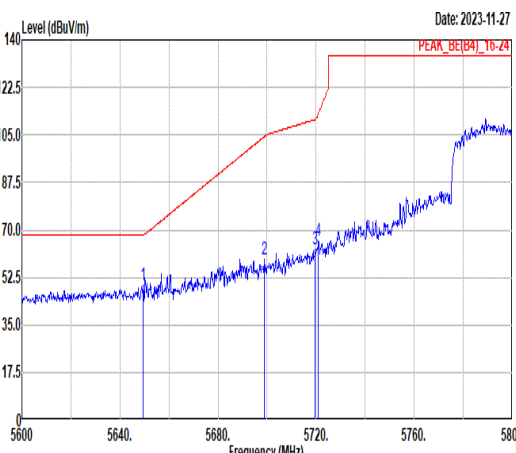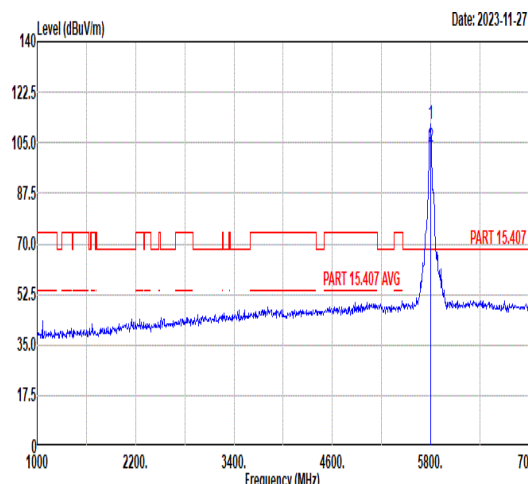

Mode	37																																																																																																																						
	Band Edge - L																																																																																																																						
	UNII 3_5.725-5.85_802.11ax HE40_CHCH159_Full RU_5795MHz																																																																																																																						
ANT	CDD 1+2																																																																																																																						
Pol.	Horizontal						Fundamental																																																																																																																
Peak																																																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>5649.40</td><td>49.83</td><td>68.30</td><td>-18.47</td><td>39.87</td><td>34.93</td><td>8.40</td><td>33.37</td></tr><tr><td>2</td><td>5699.00</td><td>59.09</td><td>104.47</td><td>-45.38</td><td>48.86</td><td>35.01</td><td>8.58</td><td>33.36</td></tr><tr><td>3</td><td>5719.60</td><td>62.92</td><td>110.69</td><td>-47.77</td><td>52.58</td><td>35.05</td><td>8.65</td><td>33.36</td></tr><tr><td>4</td><td>5721.00</td><td>66.04</td><td>113.08</td><td>-47.04</td><td>55.69</td><td>35.05</td><td>8.66</td><td>33.36</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5649.40	49.83	68.30	-18.47	39.87	34.93	8.40	33.37	2	5699.00	59.09	104.47	-45.38	48.86	35.01	8.58	33.36	3	5719.60	62.92	110.69	-47.77	52.58	35.05	8.65	33.36	4	5721.00	66.04	113.08	-47.04	55.69	35.05	8.66	33.36	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>5795.00</td><td>111.55</td><td>-----</td><td>-----</td><td>100.79</td><td>35.17</td><td>8.93</td><td>33.34</td></tr><tr><td>2</td><td>5795.00</td><td>103.54</td><td>-----</td><td>-----</td><td>92.78</td><td>35.17</td><td>8.93</td><td>33.34</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5795.00	111.55	-----	-----	100.79	35.17	8.93	33.34	2	5795.00	103.54	-----	-----	92.78	35.17	8.93	33.34
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
		Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																														
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																														
1	5649.40	49.83	68.30	-18.47	39.87	34.93	8.40	33.37																																																																																																															
2	5699.00	59.09	104.47	-45.38	48.86	35.01	8.58	33.36																																																																																																															
3	5719.60	62.92	110.69	-47.77	52.58	35.05	8.65	33.36																																																																																																															
4	5721.00	66.04	113.08	-47.04	55.69	35.05	8.66	33.36																																																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																															
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																															
1	5795.00	111.55	-----	-----	100.79	35.17	8.93	33.34																																																																																																															
2	5795.00	103.54	-----	-----	92.78	35.17	8.93	33.34																																																																																																															



Mode	37																																																																									
	Band Edge - R																																																																									
	UNII 3_5.725-5.85_802.11ax HE40_CHCH159_Full RU_5795MHz																																																																									
ANT	CDD 1+2																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	Date: 2023-11-27 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5851.20</td><td>69.99</td><td>119.46</td><td>-49.47</td><td>59.18</td><td>35.26</td><td>8.88</td><td>33.33</td><td>378</td><td>9 Peak</td></tr><tr><td>2</td><td>5856.80</td><td>70.66</td><td>110.30</td><td>-39.64</td><td>59.85</td><td>35.27</td><td>8.87</td><td>33.33</td><td>378</td><td>9 Peak</td></tr><tr><td>3</td><td>5877.20</td><td>65.08</td><td>103.57</td><td>-38.49</td><td>54.26</td><td>35.30</td><td>8.85</td><td>33.33</td><td>378</td><td>9 Peak</td></tr><tr><td>4</td><td>5933.20</td><td>56.88</td><td>68.30</td><td>-11.42</td><td>46.03</td><td>35.39</td><td>8.78</td><td>33.32</td><td>378</td><td>9 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5851.20	69.99	119.46	-49.47	59.18	35.26	8.88	33.33	378	9 Peak	2	5856.80	70.66	110.30	-39.64	59.85	35.27	8.87	33.33	378	9 Peak	3	5877.20	65.08	103.57	-38.49	54.26	35.30	8.85	33.33	378	9 Peak	4	5933.20	56.88	68.30	-11.42	46.03	35.39	8.78	33.32	378	9 Peak	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5851.20	69.99	119.46	-49.47	59.18	35.26	8.88	33.33	378	9 Peak																																																																
2	5856.80	70.66	110.30	-39.64	59.85	35.27	8.87	33.33	378	9 Peak																																																																
3	5877.20	65.08	103.57	-38.49	54.26	35.30	8.85	33.33	378	9 Peak																																																																
4	5933.20	56.88	68.30	-11.42	46.03	35.39	8.78	33.32	378	9 Peak																																																																





Mode	37																																																																																								
	Band Edge - L																																																																																								
	UNII 3_5.725-5.85_802.11ax HE40_CHCH159_Full RU_5795MHz																																																																																								
ANT	CDD 1+2																																																																																								
Pol.	Vertical																																																																																								
Peak	Date: 2023-11-27 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5649.20</td><td>52.67</td><td>68.30</td><td>-15.63</td><td>42.72</td><td>34.93</td><td>8.39</td><td>33.37</td><td>200</td><td>39</td><td>Peak</td></tr><tr><td>2</td><td>5689.60</td><td>63.71</td><td>97.55</td><td>-33.84</td><td>53.53</td><td>35.00</td><td>8.54</td><td>33.36</td><td>200</td><td>39</td><td>Peak</td></tr><tr><td>3</td><td>5711.40</td><td>70.05</td><td>108.39</td><td>-38.34</td><td>59.76</td><td>35.03</td><td>8.62</td><td>33.36</td><td>200</td><td>39</td><td>Peak</td></tr><tr><td>4</td><td>5721.60</td><td>68.98</td><td>114.45</td><td>-45.47</td><td>58.63</td><td>35.05</td><td>8.66</td><td>33.36</td><td>200</td><td>39</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5649.20	52.67	68.30	-15.63	42.72	34.93	8.39	33.37	200	39	Peak	2	5689.60	63.71	97.55	-33.84	53.53	35.00	8.54	33.36	200	39	Peak	3	5711.40	70.05	108.39	-38.34	59.76	35.03	8.62	33.36	200	39	Peak	4	5721.60	68.98	114.45	-45.47	58.63	35.05	8.66	33.36	200	39	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
		Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	5649.20	52.67	68.30	-15.63	42.72	34.93	8.39	33.37	200	39	Peak																																																																														
2	5689.60	63.71	97.55	-33.84	53.53	35.00	8.54	33.36	200	39	Peak																																																																														
3	5711.40	70.05	108.39	-38.34	59.76	35.03	8.62	33.36	200	39	Peak																																																																														
4	5721.60	68.98	114.45	-45.47	58.63	35.05	8.66	33.36	200	39	Peak																																																																														
Date: 2023-11-27 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5795.00</td><td>112.03</td><td>-----</td><td>-----</td><td>101.27</td><td>35.17</td><td>8.93</td><td>33.34</td><td>200</td><td>39</td><td>Peak</td></tr><tr><td>2</td><td>5795.00</td><td>103.94</td><td>-----</td><td>-----</td><td>93.18</td><td>35.17</td><td>8.93</td><td>33.34</td><td>200</td><td>39</td><td>Average</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	112.03	-----	-----	101.27	35.17	8.93	33.34	200	39	Peak	2	5795.00	103.94	-----	-----	93.18	35.17	8.93	33.34	200	39	Average																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	5795.00	112.03	-----	-----	101.27	35.17	8.93	33.34	200	39	Peak																																																																														
2	5795.00	103.94	-----	-----	93.18	35.17	8.93	33.34	200	39	Average																																																																														





Mode	37																																																																									
	Band Edge - R																																																																									
	UNII 3_5.725-5.85_802.11ax HE40_CHCH159_Full RU_5795MHz																																																																									
ANT	CDD 1+2																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	Date: 2023-11-27 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5853.00</td><td>71.59</td><td>115.36</td><td>-43.77</td><td>60.79</td><td>35.26</td><td>8.87</td><td>33.33</td><td>200</td><td>39 Peak</td></tr><tr><td>2</td><td>5859.20</td><td>71.75</td><td>109.62</td><td>-37.87</td><td>60.94</td><td>35.27</td><td>8.87</td><td>33.33</td><td>200</td><td>39 Peak</td></tr><tr><td>3</td><td>5884.80</td><td>68.01</td><td>97.92</td><td>-29.91</td><td>57.17</td><td>35.32</td><td>8.84</td><td>33.32</td><td>200</td><td>39 Peak</td></tr><tr><td>4</td><td>5933.80</td><td>57.50</td><td>68.30</td><td>-10.80</td><td>46.64</td><td>35.40</td><td>8.78</td><td>33.32</td><td>200</td><td>39 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5853.00	71.59	115.36	-43.77	60.79	35.26	8.87	33.33	200	39 Peak	2	5859.20	71.75	109.62	-37.87	60.94	35.27	8.87	33.33	200	39 Peak	3	5884.80	68.01	97.92	-29.91	57.17	35.32	8.84	33.32	200	39 Peak	4	5933.80	57.50	68.30	-10.80	46.64	35.40	8.78	33.32	200	39 Peak	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5853.00	71.59	115.36	-43.77	60.79	35.26	8.87	33.33	200	39 Peak																																																																
2	5859.20	71.75	109.62	-37.87	60.94	35.27	8.87	33.33	200	39 Peak																																																																
3	5884.80	68.01	97.92	-29.91	57.17	35.32	8.84	33.32	200	39 Peak																																																																
4	5933.80	57.50	68.30	-10.80	46.64	35.40	8.78	33.32	200	39 Peak																																																																

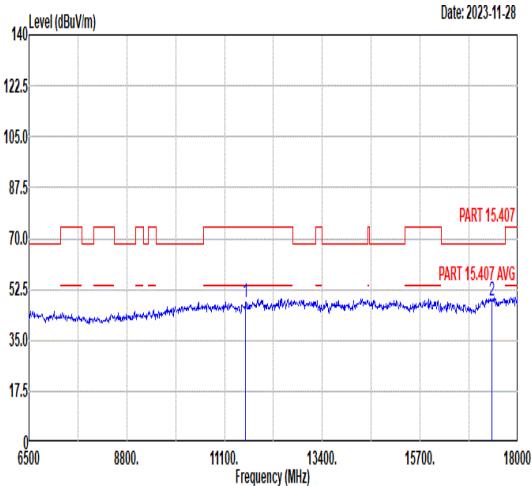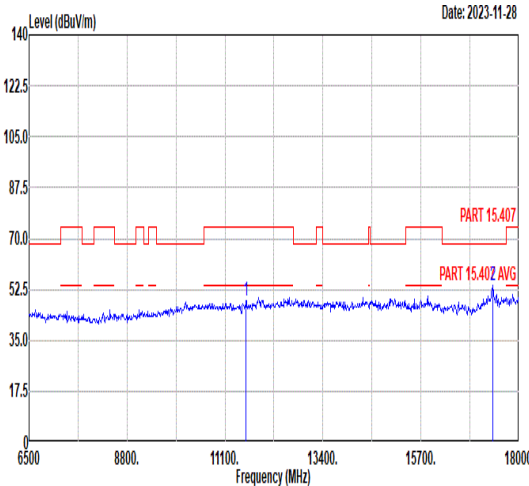

Mode	37																																																																											
	Harmonic																																																																											
	UNII 3_5.725-5.85_802.11ax HE40_CHCH159_Full RU_5795MHz																																																																											
ANT	CDD 1+2																																																																											
Pol.	Horizontal						Vertical																																																																					
Peak Avg																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr></thead><tbody><tr><td>1 11590.00</td><td>48.24</td><td>74.00</td><td>-25.76</td><td>55.69</td><td>38.70</td><td>11.50</td><td>57.65</td></tr><tr><td>2 17385.00</td><td>48.86</td><td>68.30</td><td>-19.44</td><td>52.06</td><td>41.35</td><td>13.21</td><td>57.76</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1 11590.00	48.24	74.00	-25.76	55.69	38.70	11.50	57.65	2 17385.00	48.86	68.30	-19.44	52.06	41.35	13.21	57.76	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr></thead><tbody><tr><td>1 11590.00</td><td>48.43</td><td>74.00</td><td>-25.57</td><td>55.88</td><td>38.70</td><td>11.50</td><td>57.65</td></tr><tr><td>2 17385.00</td><td>53.62</td><td>68.30</td><td>-14.68</td><td>56.82</td><td>41.35</td><td>13.21</td><td>57.76</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1 11590.00	48.43	74.00	-25.57	55.88	38.70	11.50	57.65	2 17385.00	53.62	68.30	-14.68	56.82	41.35	13.21	57.76	
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
1 11590.00	48.24	74.00	-25.76	55.69	38.70	11.50	57.65																																																																					
2 17385.00	48.86	68.30	-19.44	52.06	41.35	13.21	57.76																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
1 11590.00	48.43	74.00	-25.57	55.88	38.70	11.50	57.65																																																																					
2 17385.00	53.62	68.30	-14.68	56.82	41.35	13.21	57.76																																																																					
<table><thead><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr></thead><tbody><tr><td>1 11590.00</td><td>48.24</td><td>74.00</td><td>-25.76</td><td>55.69</td><td>38.70</td><td>11.50</td><td>57.65</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2 17385.00</td><td>48.86</td><td>68.30</td><td>-19.44</td><td>52.06</td><td>41.35</td><td>13.21</td><td>57.76</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark	1 11590.00	48.24	74.00	-25.76	55.69	38.70	11.50	57.65	--	--	Peak	2 17385.00	48.86	68.30	-19.44	52.06	41.35	13.21	57.76	--	--	Peak	<table><thead><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr></thead><tbody><tr><td>1 11590.00</td><td>48.43</td><td>74.00</td><td>-25.57</td><td>55.88</td><td>38.70</td><td>11.50</td><td>57.65</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2 17385.00</td><td>53.62</td><td>68.30</td><td>-14.68</td><td>56.82</td><td>41.35</td><td>13.21</td><td>57.76</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark	1 11590.00	48.43	74.00	-25.57	55.88	38.70	11.50	57.65	--	--	Peak	2 17385.00	53.62	68.30	-14.68	56.82	41.35	13.21	57.76	--	--	Peak
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark																																																																		
1 11590.00	48.24	74.00	-25.76	55.69	38.70	11.50	57.65	--	--	Peak																																																																		
2 17385.00	48.86	68.30	-19.44	52.06	41.35	13.21	57.76	--	--	Peak																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark																																																																		
1 11590.00	48.43	74.00	-25.57	55.88	38.70	11.50	57.65	--	--	Peak																																																																		
2 17385.00	53.62	68.30	-14.68	56.82	41.35	13.21	57.76	--	--	Peak																																																																		

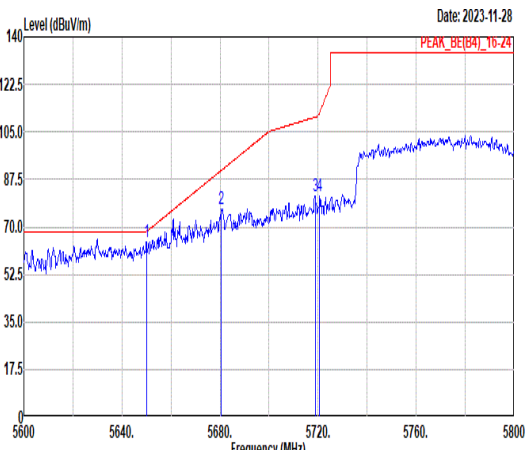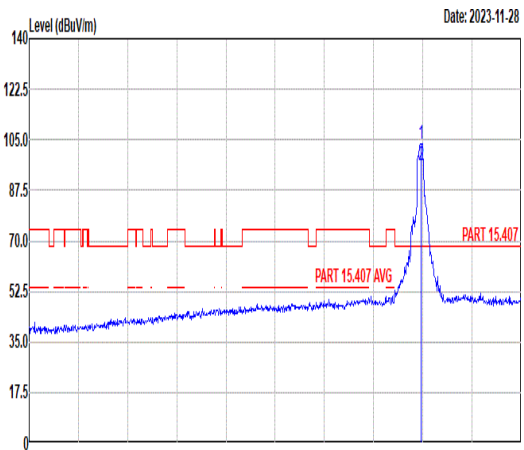

Mode	38																																																																																																																																								
	Band Edge - L																																																																																																																																								
	UNII 3_5.725-5.85_802.11ax HE80_CHCH155_Full RU_5775MHz																																																																																																																																								
ANT	CDD 1+2																																																																																																																																								
Pol.	Horizontal						Fundamental																																																																																																																																		
Peak	 Date: 2023-11-28 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5650.00</td><td>64.47</td><td>68.30</td><td>-3.83</td><td>54.50</td><td>34.94</td><td>8.40</td><td>33.37</td><td>114</td><td>319 Peak</td></tr><tr><td>2</td><td>5680.60</td><td>76.55</td><td>90.92</td><td>-14.37</td><td>66.42</td><td>34.98</td><td>8.51</td><td>33.36</td><td>114</td><td>319 Peak</td></tr><tr><td>3</td><td>5718.80</td><td>81.12</td><td>110.46</td><td>-29.34</td><td>70.78</td><td>35.05</td><td>8.65</td><td>33.36</td><td>114</td><td>319 Peak</td></tr><tr><td>4</td><td>5720.60</td><td>81.24</td><td>112.17</td><td>-30.93</td><td>70.89</td><td>35.05</td><td>8.66</td><td>33.36</td><td>114</td><td>319 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5650.00	64.47	68.30	-3.83	54.50	34.94	8.40	33.37	114	319 Peak	2	5680.60	76.55	90.92	-14.37	66.42	34.98	8.51	33.36	114	319 Peak	3	5718.80	81.12	110.46	-29.34	70.78	35.05	8.65	33.36	114	319 Peak	4	5720.60	81.24	112.17	-30.93	70.89	35.05	8.66	33.36	114	319 Peak	 Date: 2023-11-28 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5775.00</td><td>103.71</td><td>-----</td><td>-----</td><td>93.06</td><td>35.14</td><td>8.86</td><td>33.35</td><td>114</td><td>319 Peak</td></tr><tr><td>2</td><td>5775.00</td><td>96.40</td><td>-----</td><td>-----</td><td>85.75</td><td>35.14</td><td>8.86</td><td>33.35</td><td>114</td><td>319 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	103.71	-----	-----	93.06	35.14	8.86	33.35	114	319 Peak	2	5775.00	96.40	-----	-----	85.75	35.14	8.86	33.35	114	319 Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																
		Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	5650.00	64.47	68.30	-3.83	54.50	34.94	8.40	33.37	114	319 Peak																																																																																																																															
2	5680.60	76.55	90.92	-14.37	66.42	34.98	8.51	33.36	114	319 Peak																																																																																																																															
3	5718.80	81.12	110.46	-29.34	70.78	35.05	8.65	33.36	114	319 Peak																																																																																																																															
4	5720.60	81.24	112.17	-30.93	70.89	35.05	8.66	33.36	114	319 Peak																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																	
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	5775.00	103.71	-----	-----	93.06	35.14	8.86	33.35	114	319 Peak																																																																																																																															
2	5775.00	96.40	-----	-----	85.75	35.14	8.86	33.35	114	319 Average																																																																																																																															





Mode	38																																																																																	
	Band Edge - R																																																																																	
	UNII 3_5.725-5.85_802.11ax HE80_CHCH155_Full RU_5775MHz																																																																																	
ANT	CDD 1+2																																																																																	
Pol.	Horizontal					Fundamental																																																																												
Peak	Date: 2023-11-28 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5850.20</td><td>78.24</td><td>121.74</td><td>-43.50</td><td>67.43</td><td>35.26</td><td>8.88</td><td>33.33</td><td>114</td><td>319 Peak</td></tr><tr><td>2</td><td>5855.20</td><td>77.24</td><td>110.74</td><td>-33.50</td><td>66.43</td><td>35.27</td><td>8.87</td><td>33.33</td><td>114</td><td>319 Peak</td></tr><tr><td>3</td><td>5875.40</td><td>68.25</td><td>104.90</td><td>-36.65</td><td>57.43</td><td>35.30</td><td>8.85</td><td>33.33</td><td>114</td><td>319 Peak</td></tr><tr><td>4</td><td>5925.60</td><td>58.11</td><td>68.30</td><td>-10.19</td><td>47.26</td><td>35.38</td><td>8.79</td><td>33.32</td><td>114</td><td>319 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5850.20	78.24	121.74	-43.50	67.43	35.26	8.88	33.33	114	319 Peak	2	5855.20	77.24	110.74	-33.50	66.43	35.27	8.87	33.33	114	319 Peak	3	5875.40	68.25	104.90	-36.65	57.43	35.30	8.85	33.33	114	319 Peak	4	5925.60	58.11	68.30	-10.19	47.26	35.38	8.79	33.32	114	319 Peak	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5850.20	78.24	121.74	-43.50	67.43	35.26	8.88	33.33	114	319 Peak																																																																								
2	5855.20	77.24	110.74	-33.50	66.43	35.27	8.87	33.33	114	319 Peak																																																																								
3	5875.40	68.25	104.90	-36.65	57.43	35.30	8.85	33.33	114	319 Peak																																																																								
4	5925.60	58.11	68.30	-10.19	47.26	35.38	8.79	33.32	114	319 Peak																																																																								



Mode	38																																																																																		
	Band Edge - R																																																																																		
	UNII 3_5.725-5.85_802.11ax HE80_CHCH155_Full RU_5775MHz																																																																																		
ANT	CDD 1+2																																																																																		
Pol.	Vertical						Fundamental																																																																												
Peak	Date: 2023-11-28 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5853.80</td><td>80.31</td><td>113.54</td><td>-33.23</td><td>69.50</td><td>35.27</td><td>8.87</td><td>33.33</td><td>319</td><td>255 Peak</td></tr><tr><td>2</td><td>5855.60</td><td>80.19</td><td>110.63</td><td>-30.44</td><td>69.38</td><td>35.27</td><td>8.87</td><td>33.33</td><td>319</td><td>255 Peak</td></tr><tr><td>3</td><td>5875.80</td><td>72.77</td><td>104.61</td><td>-31.84</td><td>61.95</td><td>35.30</td><td>8.85</td><td>33.33</td><td>319</td><td>255 Peak</td></tr><tr><td>4</td><td>5925.80</td><td>63.49</td><td>68.30</td><td>-4.81</td><td>52.64</td><td>35.38</td><td>8.79</td><td>33.32</td><td>319</td><td>255 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5853.80	80.31	113.54	-33.23	69.50	35.27	8.87	33.33	319	255 Peak	2	5855.60	80.19	110.63	-30.44	69.38	35.27	8.87	33.33	319	255 Peak	3	5875.80	72.77	104.61	-31.84	61.95	35.30	8.85	33.33	319	255 Peak	4	5925.80	63.49	68.30	-4.81	52.64	35.38	8.79	33.32	319	255 Peak	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	5853.80	80.31	113.54	-33.23	69.50	35.27	8.87	33.33	319	255 Peak																																																																									
2	5855.60	80.19	110.63	-30.44	69.38	35.27	8.87	33.33	319	255 Peak																																																																									
3	5875.80	72.77	104.61	-31.84	61.95	35.30	8.85	33.33	319	255 Peak																																																																									
4	5925.80	63.49	68.30	-4.81	52.64	35.38	8.79	33.32	319	255 Peak																																																																									

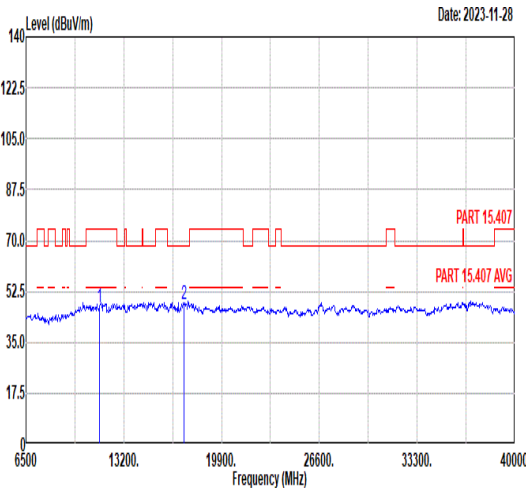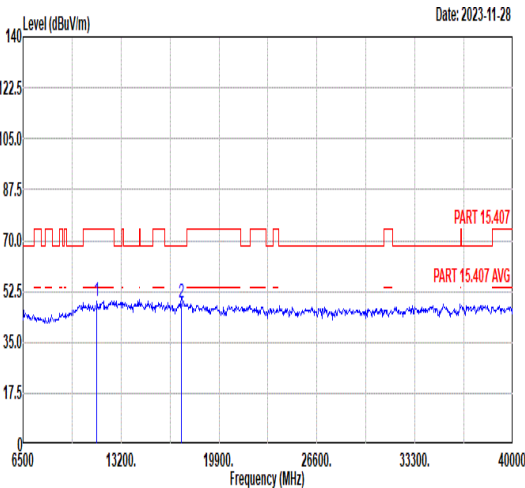

Mode	38																																																																																																																							
	Harmonic																																																																																																																							
	UNII 3_5.725-5.85_802.11ax HE80_CHCH155_Full RU_5775MHz																																																																																																																							
ANT	CDD 1+2																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																	
Peak Avg																																																																																																																								
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11550.00</td><td>47.02</td><td>74.00</td><td>-26.98</td><td>54.58</td><td>38.65</td><td>11.48</td><td>57.69</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17325.00</td><td>48.06</td><td>68.30</td><td>-20.24</td><td>51.38</td><td>41.33</td><td>13.19</td><td>57.84</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11550.00	47.02	74.00	-26.98	54.58	38.65	11.48	57.69	--	--	Peak	2	17325.00	48.06	68.30	-20.24	51.38	41.33	13.19	57.84	--	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11550.00</td><td>48.87</td><td>74.00</td><td>-25.13</td><td>56.43</td><td>38.65</td><td>11.48</td><td>57.69</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17325.00</td><td>48.71</td><td>68.30</td><td>-19.59</td><td>52.03</td><td>41.33</td><td>13.19</td><td>57.84</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11550.00	48.87	74.00	-25.13	56.43	38.65	11.48	57.69	--	--	Peak	2	17325.00	48.71	68.30	-19.59	52.03	41.33	13.19	57.84	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	11550.00	47.02	74.00	-26.98	54.58	38.65	11.48	57.69	--	--	Peak																																																																																																													
2	17325.00	48.06	68.30	-20.24	51.38	41.33	13.19	57.84	--	--	Peak																																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	11550.00	48.87	74.00	-25.13	56.43	38.65	11.48	57.69	--	--	Peak																																																																																																													
2	17325.00	48.71	68.30	-19.59	52.03	41.33	13.19	57.84	--	--	Peak																																																																																																													



Mode	39											
	LF											
	UNII 2A_5.25-5.35_802.11ax HE80_CHCH58_LF_5290MHz											
ANT	CDD 1+2											
Pol.	Horizontal						Vertical					
Peak Avg	Data: 3 Level (dBuV/m) </											



Mode	40										
	LF										
	UNII 3_5.725-5.85_802.11ax HE80_CHCH155_Full RU_5775MHz										
ANT	CDD 1+2										
Pol.	Horizontal						Vertical				
Peak Avg	Data: 5 Level (dBuV/m) <										



Mode	43																																																																																					
	Band Edge																																																																																					
	Straddle channels_5.47-5.85_802.11a_CHCH144_5720MHz																																																																																					
ANT	CDD 1+2																																																																																					
Pol.	Horizontal						Fundamental																																																																															
Peak	Level (dBuV/m) Date: 2023-12-01 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5458.90</td><td>48.49</td><td>74.00</td><td>-25.51</td><td>38.77</td><td>34.66</td><td>8.41</td><td>33.35</td><td>125</td><td>345</td><td>Peak</td></tr><tr><td>2</td><td>5466.60</td><td>46.41</td><td>68.30</td><td>-21.89</td><td>36.70</td><td>34.67</td><td>8.40</td><td>33.36</td><td>125</td><td>345</td><td>Peak</td></tr><tr><td>3</td><td>5720.00</td><td>103.49</td><td>-----</td><td>93.14</td><td>35.05</td><td>8.66</td><td>33.36</td><td>125</td><td>345</td><td>Peak</td></tr><tr><td>4</td><td>5859.85</td><td>47.75</td><td>68.30</td><td>-20.55</td><td>36.93</td><td>35.28</td><td>8.87</td><td>33.33</td><td>125</td><td>345</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5458.90	48.49	74.00	-25.51	38.77	34.66	8.41	33.35	125	345	Peak	2	5466.60	46.41	68.30	-21.89	36.70	34.67	8.40	33.36	125	345	Peak	3	5720.00	103.49	-----	93.14	35.05	8.66	33.36	125	345	Peak	4	5859.85	47.75	68.30	-20.55	36.93	35.28	8.87	33.33	125	345	Peak	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	5458.90	48.49	74.00	-25.51	38.77	34.66	8.41	33.35	125	345	Peak																																																																											
2	5466.60	46.41	68.30	-21.89	36.70	34.67	8.40	33.36	125	345	Peak																																																																											
3	5720.00	103.49	-----	93.14	35.05	8.66	33.36	125	345	Peak																																																																												
4	5859.85	47.75	68.30	-20.55	36.93	35.28	8.87	33.33	125	345	Peak																																																																											
Avg	Level (dBuV/m) Date: 2023-12-01 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5399.50</td><td>38.04</td><td>54.00</td><td>-15.96</td><td>28.21</td><td>34.62</td><td>8.46</td><td>33.25</td><td>125</td><td>345</td><td>Peak</td></tr><tr><td>2</td><td>5720.00</td><td>97.40</td><td>-----</td><td>87.05</td><td>35.05</td><td>8.66</td><td>33.36</td><td>125</td><td>345</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5399.50	38.04	54.00	-15.96	28.21	34.62	8.46	33.25	125	345	Peak	2	5720.00	97.40	-----	87.05	35.05	8.66	33.36	125	345	Average	Blank																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	5399.50	38.04	54.00	-15.96	28.21	34.62	8.46	33.25	125	345	Peak																																																																											
2	5720.00	97.40	-----	87.05	35.05	8.66	33.36	125	345	Average																																																																												



Mode	43																																																																																																																																
	Harmonic																																																																																																																																
	Straddle channels_5.47-5.85_802.11a_CHCH144_5720MHz																																																																																																																																
ANT	CDD 1+2																																																																																																																																
Pol.	Horizontal						Vertical																																																																																																																										
Peak Avg	Level (dBuV/m) Date: 2023-12-01 Frequency (MHz)						Level (dBuV/m) Date: 2023-12-01 Frequency (MHz)																																																																																																																										
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11440.00</td><td>47.05</td><td>74.00</td><td>-26.95</td><td>54.90</td><td>38.54</td><td>11.42</td><td>57.81</td><td>157</td><td>285</td><td>Peak</td></tr><tr><td>2</td><td>17160.00</td><td>46.18</td><td>68.30</td><td>-22.12</td><td>49.82</td><td>41.27</td><td>13.16</td><td>58.07</td><td>165</td><td>246</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11440.00	47.05	74.00	-26.95	54.90	38.54	11.42	57.81	157	285	Peak	2	17160.00	46.18	68.30	-22.12	49.82	41.27	13.16	58.07	165	246	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11440.00</td><td>46.55</td><td>74.00</td><td>-27.45</td><td>54.40</td><td>38.54</td><td>11.42</td><td>57.81</td><td>122</td><td>291</td><td>Peak</td></tr><tr><td>2</td><td>17160.00</td><td>46.29</td><td>68.30</td><td>-22.01</td><td>49.93</td><td>41.27</td><td>13.16</td><td>58.07</td><td>153</td><td>102</td><td>Peak</td></tr></table>							Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11440.00	46.55	74.00	-27.45	54.40	38.54	11.42	57.81	122	291	Peak	2	17160.00	46.29	68.30	-22.01	49.93	41.27	13.16	58.07	153	102	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	11440.00	47.05	74.00	-26.95	54.90	38.54	11.42	57.81	157	285	Peak																																																																																																																						
2	17160.00	46.18	68.30	-22.12	49.82	41.27	13.16	58.07	165	246	Peak																																																																																																																						
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	11440.00	46.55	74.00	-27.45	54.40	38.54	11.42	57.81	122	291	Peak																																																																																																																						
2	17160.00	46.29	68.30	-22.01	49.93	41.27	13.16	58.07	153	102	Peak																																																																																																																						



Mode	44																																																																									
	Band Edge																																																																									
	Straddle channels_5.47-5.85_802.11ax HE40_CHCH144_Full_5720MHz																																																																									
ANT	CDD 1+2																																																																									
Pol.	Horizontal					Fundamental																																																																				
Peak	Level (dBuV/m) Date: 2023-12-01 U-NII-2C AND U-NII-3 Frequency (MHz) <table><thead><tr><th></th><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5399.50</td><td>50.10</td><td>74.00</td><td>-23.90</td><td>40.27</td><td>34.62</td><td>8.46</td><td>33.25</td><td>122</td><td>343 Peak</td></tr><tr><td>2</td><td>5469.35</td><td>47.56</td><td>68.30</td><td>-20.74</td><td>37.85</td><td>34.67</td><td>8.40</td><td>33.36</td><td>122</td><td>343 Peak</td></tr><tr><td>3</td><td>5720.00</td><td>105.97</td><td>-----</td><td>95.62</td><td>35.05</td><td>8.66</td><td>33.36</td><td>122</td><td>343 Peak</td></tr><tr><td>4</td><td>5887.35</td><td>50.38</td><td>68.30</td><td>-17.92</td><td>39.55</td><td>35.32</td><td>8.83</td><td>33.32</td><td>122</td><td>343 Peak</td></tr></tbody></table>						Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5399.50	50.10	74.00	-23.90	40.27	34.62	8.46	33.25	122	343 Peak	2	5469.35	47.56	68.30	-20.74	37.85	34.67	8.40	33.36	122	343 Peak	3	5720.00	105.97	-----	95.62	35.05	8.66	33.36	122	343 Peak	4	5887.35	50.38	68.30	-17.92	39.55	35.32	8.83	33.32	122	343 Peak	Blank				
	Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																
1	5399.50	50.10	74.00	-23.90	40.27	34.62	8.46	33.25	122	343 Peak																																																																
2	5469.35	47.56	68.30	-20.74	37.85	34.67	8.40	33.36	122	343 Peak																																																																
3	5720.00	105.97	-----	95.62	35.05	8.66	33.36	122	343 Peak																																																																	
4	5887.35	50.38	68.30	-17.92	39.55	35.32	8.83	33.32	122	343 Peak																																																																
Avg	Level (dBuV/m) Date: 2023-12-01 PART 15.407 AVG Frequency (MHz) <table><thead><tr><th></th><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5436.90</td><td>38.68</td><td>54.00</td><td>-15.32</td><td>28.90</td><td>34.65</td><td>8.44</td><td>33.31</td><td>122</td><td>343 Peak</td></tr><tr><td>2</td><td>5720.00</td><td>98.05</td><td>-----</td><td>87.70</td><td>35.05</td><td>8.66</td><td>33.36</td><td>122</td><td>343 Average</td></tr></tbody></table>						Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5436.90	38.68	54.00	-15.32	28.90	34.65	8.44	33.31	122	343 Peak	2	5720.00	98.05	-----	87.70	35.05	8.66	33.36	122	343 Average	Blank																										
	Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																
1	5436.90	38.68	54.00	-15.32	28.90	34.65	8.44	33.31	122	343 Peak																																																																
2	5720.00	98.05	-----	87.70	35.05	8.66	33.36	122	343 Average																																																																	



Mode	44																																																																								
	Band Edge																																																																								
	Straddle channels_5.47-5.85_802.11ax HE40_CHCH144_Full_5720MHz																																																																								
ANT	CDD 1+2																																																																								
Pol.	Vertical	Fundamental																																																																							
Peak	Level (dBuV/m) Date: 2023-12-01 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5412.15</td><td>48.91</td><td>74.00</td><td>-25.09</td><td>39.08</td><td>34.63</td><td>8.47</td><td>33.27</td><td>107</td><td>277 Peak</td></tr><tr><td>2</td><td>5460.00</td><td>48.43</td><td>68.30</td><td>-19.87</td><td>38.71</td><td>34.66</td><td>8.41</td><td>33.35</td><td>107</td><td>277 Peak</td></tr><tr><td>3</td><td>5720.00</td><td>108.00</td><td>-----</td><td>97.65</td><td>35.05</td><td>8.66</td><td>33.36</td><td>107</td><td>277 Peak</td></tr><tr><td>4</td><td>5884.05</td><td>49.73</td><td>68.30</td><td>-18.57</td><td>38.89</td><td>35.32</td><td>8.84</td><td>33.32</td><td>107</td><td>277 Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5412.15	48.91	74.00	-25.09	39.08	34.63	8.47	33.27	107	277 Peak	2	5460.00	48.43	68.30	-19.87	38.71	34.66	8.41	33.35	107	277 Peak	3	5720.00	108.00	-----	97.65	35.05	8.66	33.36	107	277 Peak	4	5884.05	49.73	68.30	-18.57	38.89	35.32	8.84	33.32	107	277 Peak	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																
1	5412.15	48.91	74.00	-25.09	39.08	34.63	8.47	33.27	107	277 Peak																																																															
2	5460.00	48.43	68.30	-19.87	38.71	34.66	8.41	33.35	107	277 Peak																																																															
3	5720.00	108.00	-----	97.65	35.05	8.66	33.36	107	277 Peak																																																																
4	5884.05	49.73	68.30	-18.57	38.89	35.32	8.84	33.32	107	277 Peak																																																															
Avg	Level (dBuV/m) Date: 2023-12-01 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5455.60</td><td>38.72</td><td>54.00</td><td>-15.28</td><td>28.98</td><td>34.66</td><td>8.42</td><td>33.34</td><td>107</td><td>277 Peak</td></tr><tr><td>2</td><td>5720.00</td><td>100.58</td><td>-----</td><td>90.23</td><td>35.05</td><td>8.66</td><td>33.36</td><td>107</td><td>277 Average</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5455.60	38.72	54.00	-15.28	28.98	34.66	8.42	33.34	107	277 Peak	2	5720.00	100.58	-----	90.23	35.05	8.66	33.36	107	277 Average	Blank																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																
1	5455.60	38.72	54.00	-15.28	28.98	34.66	8.42	33.34	107	277 Peak																																																															
2	5720.00	100.58	-----	90.23	35.05	8.66	33.36	107	277 Average																																																																





Mode	44																																																																																																																						
	Harmonic																																																																																																																						
	Straddle channels_5.47-5.85_802.11ax HE40_CHCH144_Full_5720MHz																																																																																																																						
ANT	CDD 1+2																																																																																																																						
Pol.	Horizontal						Vertical																																																																																																																
Peak Avg	Level (dBuV/m) Date: 2023-12-01 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11440.00</td><td>46.49</td><td>74.00</td><td>-27.51</td><td>54.34</td><td>38.54</td><td>11.42</td><td>57.81</td><td>157</td><td>285</td><td>Peak</td></tr><tr><td>2</td><td>17160.00</td><td>46.55</td><td>68.30</td><td>-21.75</td><td>50.19</td><td>41.27</td><td>13.16</td><td>58.07</td><td>165</td><td>246</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11440.00	46.49	74.00	-27.51	54.34	38.54	11.42	57.81	157	285	Peak	2	17160.00	46.55	68.30	-21.75	50.19	41.27	13.16	58.07	165	246	Peak	Level (dBuV/m) Date: 2023-12-01 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11440.00</td><td>47.09</td><td>74.00</td><td>-26.91</td><td>54.94</td><td>38.54</td><td>11.42</td><td>57.81</td><td>122</td><td>291</td><td>Peak</td></tr><tr><td>2</td><td>17160.00</td><td>47.71</td><td>68.30</td><td>-20.59</td><td>51.35</td><td>41.27</td><td>13.16</td><td>58.07</td><td>153</td><td>102</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11440.00	47.09	74.00	-26.91	54.94	38.54	11.42	57.81	122	291	Peak	2	17160.00	47.71	68.30	-20.59	51.35	41.27	13.16	58.07	153	102	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																															
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	11440.00	46.49	74.00	-27.51	54.34	38.54	11.42	57.81	157	285	Peak																																																																																																												
2	17160.00	46.55	68.30	-21.75	50.19	41.27	13.16	58.07	165	246	Peak																																																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	11440.00	47.09	74.00	-26.91	54.94	38.54	11.42	57.81	122	291	Peak																																																																																																												
2	17160.00	47.71	68.30	-20.59	51.35	41.27	13.16	58.07	153	102	Peak																																																																																																												





Mode	45																																																																																	
	Band Edge																																																																																	
	Straddle channels_5.47-5.85_802.11ax HE40_CHCH142_Full_5710MHz																																																																																	
ANT	CDD 1+2																																																																																	
Pol.	Horizontal					Fundamental																																																																												
Peak	Level (dBuV/m) Date: 2023-12-01 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5406.10</td><td>49.75</td><td>74.00</td><td>-24.25</td><td>39.91</td><td>34.62</td><td>8.48</td><td>33.26</td><td>113</td><td>347 Peak</td></tr><tr><td>2</td><td>5463.85</td><td>49.49</td><td>68.30</td><td>-18.81</td><td>39.77</td><td>34.67</td><td>8.40</td><td>33.35</td><td>113</td><td>347 Peak</td></tr><tr><td>3</td><td>5710.00</td><td>106.89</td><td>-----</td><td>-----</td><td>96.60</td><td>35.03</td><td>8.62</td><td>33.36</td><td>113</td><td>347 Peak</td></tr><tr><td>4</td><td>5850.50</td><td>50.14</td><td>68.30</td><td>-18.16</td><td>39.33</td><td>35.26</td><td>8.88</td><td>33.33</td><td>113</td><td>347 Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5406.10	49.75	74.00	-24.25	39.91	34.62	8.48	33.26	113	347 Peak	2	5463.85	49.49	68.30	-18.81	39.77	34.67	8.40	33.35	113	347 Peak	3	5710.00	106.89	-----	-----	96.60	35.03	8.62	33.36	113	347 Peak	4	5850.50	50.14	68.30	-18.16	39.33	35.26	8.88	33.33	113	347 Peak	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5406.10	49.75	74.00	-24.25	39.91	34.62	8.48	33.26	113	347 Peak																																																																								
2	5463.85	49.49	68.30	-18.81	39.77	34.67	8.40	33.35	113	347 Peak																																																																								
3	5710.00	106.89	-----	-----	96.60	35.03	8.62	33.36	113	347 Peak																																																																								
4	5850.50	50.14	68.30	-18.16	39.33	35.26	8.88	33.33	113	347 Peak																																																																								
Avg	Level (dBuV/m) Date: 2023-12-01 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5401.70</td><td>39.10</td><td>54.00</td><td>-14.90</td><td>29.26</td><td>34.62</td><td>8.47</td><td>33.25</td><td>113</td><td>347 Peak</td></tr><tr><td>2</td><td>5710.00</td><td>97.68</td><td>-----</td><td>-----</td><td>87.39</td><td>35.03</td><td>8.62</td><td>33.36</td><td>113</td><td>347 Average</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5401.70	39.10	54.00	-14.90	29.26	34.62	8.47	33.25	113	347 Peak	2	5710.00	97.68	-----	-----	87.39	35.03	8.62	33.36	113	347 Average	Blank																										
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5401.70	39.10	54.00	-14.90	29.26	34.62	8.47	33.25	113	347 Peak																																																																								
2	5710.00	97.68	-----	-----	87.39	35.03	8.62	33.36	113	347 Average																																																																								

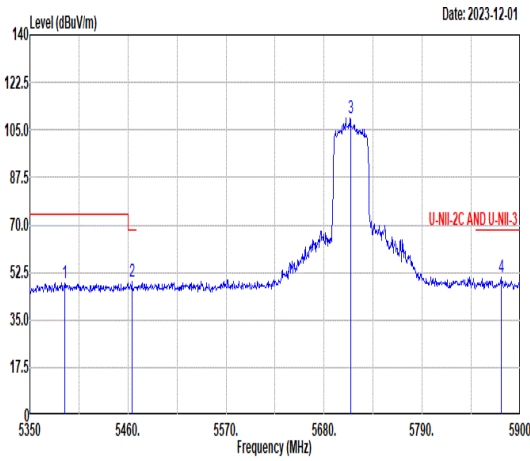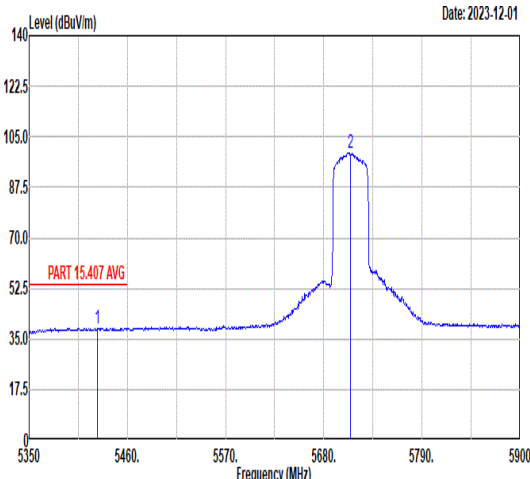

Mode	45																																																																															
	Band Edge																																																																															
	Straddle channels_5.47-5.85_802.11ax HE40_CHCH142_Full_5710MHz																																																																															
ANT	CDD 1+2																																																																															
Pol.	Vertical						Fundamental																																																																									
Peak							Blank																																																																									
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5389.05</td><td>48.56</td><td>74.00</td><td>-25.44</td><td>38.75</td><td>34.61</td><td>8.43</td><td>33.23</td><td>114</td><td>278</td><td>Peak</td></tr><tr><td>2</td><td>5464.40</td><td>48.93</td><td>68.30</td><td>-19.37</td><td>39.22</td><td>34.67</td><td>8.40</td><td>33.36</td><td>114</td><td>278</td><td>Peak</td></tr><tr><td>3</td><td>5710.00</td><td>109.51</td><td>-----</td><td>99.22</td><td>35.03</td><td>8.62</td><td>33.36</td><td>114</td><td>278</td><td>Peak</td></tr><tr><td>4</td><td>5878.55</td><td>50.55</td><td>68.30</td><td>-17.75</td><td>39.73</td><td>35.31</td><td>8.84</td><td>33.33</td><td>114</td><td>278</td><td>Peak</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5389.05	48.56	74.00	-25.44	38.75	34.61	8.43	33.23	114	278	Peak	2	5464.40	48.93	68.30	-19.37	39.22	34.67	8.40	33.36	114	278	Peak	3	5710.00	109.51	-----	99.22	35.03	8.62	33.36	114	278	Peak	4	5878.55	50.55	68.30	-17.75	39.73
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5389.05	48.56	74.00	-25.44	38.75	34.61	8.43	33.23	114	278	Peak																																																																					
2	5464.40	48.93	68.30	-19.37	39.22	34.67	8.40	33.36	114	278	Peak																																																																					
3	5710.00	109.51	-----	99.22	35.03	8.62	33.36	114	278	Peak																																																																						
4	5878.55	50.55	68.30	-17.75	39.73	35.31	8.84	33.33	114	278	Peak																																																																					
Avg							Blank																																																																									
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5426.45</td><td>38.82</td><td>54.00</td><td>-15.18</td><td>29.02</td><td>34.64</td><td>8.45</td><td>33.29</td><td>114</td><td>278</td><td>Peak</td></tr><tr><td>2</td><td>5710.00</td><td>99.26</td><td>-----</td><td>88.97</td><td>35.03</td><td>8.62</td><td>33.36</td><td>114</td><td>278</td><td>Average</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5426.45	38.82	54.00	-15.18	29.02	34.64	8.45	33.29	114	278	Peak	2	5710.00	99.26	-----	88.97	35.03	8.62	33.36	114	278	Average																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5426.45	38.82	54.00	-15.18	29.02	34.64	8.45	33.29	114	278	Peak																																																																					
2	5710.00	99.26	-----	88.97	35.03	8.62	33.36	114	278	Average																																																																						

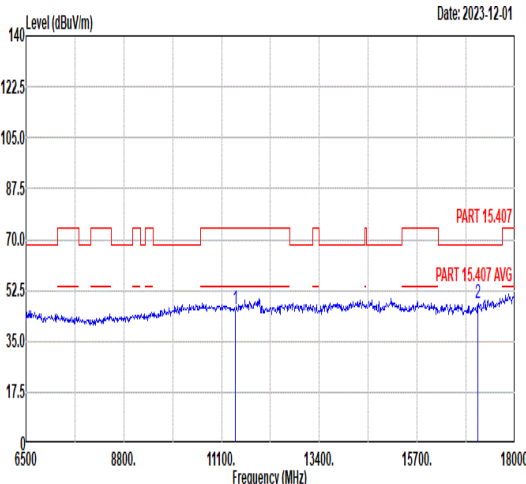
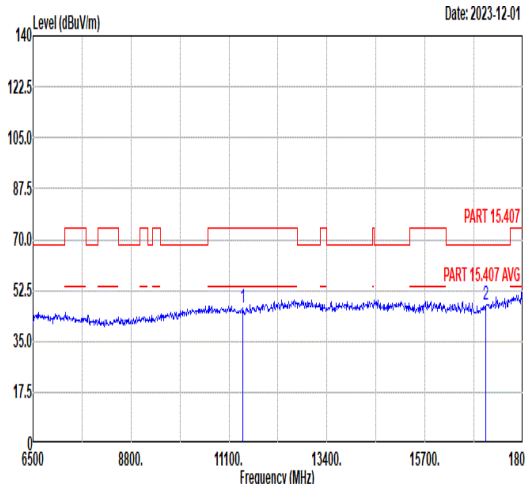


Mode	45																																																																																																																																	
	Harmonic																																																																																																																																	
	Straddle channels_5.47-5.85_802.11ax HE40_CHCH142_Full_5710MHz																																																																																																																																	
ANT	CDD 1+2																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11420.00</td><td>46.12</td><td>74.00</td><td>-27.88</td><td>54.02</td><td>38.52</td><td>11.41</td><td>57.83</td><td>157</td><td>285</td><td>Peak</td></tr><tr><td>2</td><td>17130.00</td><td>48.10</td><td>68.30</td><td>-20.20</td><td>51.81</td><td>41.25</td><td>13.15</td><td>58.11</td><td>165</td><td>246</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11420.00	46.12	74.00	-27.88	54.02	38.52	11.41	57.83	157	285	Peak	2	17130.00	48.10	68.30	-20.20	51.81	41.25	13.15	58.11	165	246	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11420.00</td><td>46.46</td><td>74.00</td><td>-27.54</td><td>54.36</td><td>38.52</td><td>11.41</td><td>57.83</td><td>122</td><td>291</td><td>Peak</td></tr><tr><td>2</td><td>17130.00</td><td>47.58</td><td>68.30</td><td>-20.72</td><td>51.29</td><td>41.25</td><td>13.15</td><td>58.11</td><td>153</td><td>102</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11420.00	46.46	74.00	-27.54	54.36	38.52	11.41	57.83	122	291	Peak	2	17130.00	47.58	68.30	-20.72	51.29	41.25	13.15	58.11	153	102	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11420.00	46.12	74.00	-27.88	54.02	38.52	11.41	57.83	157	285	Peak																																																																																																																							
2	17130.00	48.10	68.30	-20.20	51.81	41.25	13.15	58.11	165	246	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11420.00	46.46	74.00	-27.54	54.36	38.52	11.41	57.83	122	291	Peak																																																																																																																							
2	17130.00	47.58	68.30	-20.72	51.29	41.25	13.15	58.11	153	102	Peak																																																																																																																							



Mode	46																																																																																							
	Band Edge																																																																																							
	Straddle channels_5.47-5.85_802.11ax HE80_CHCH138_Full_5690MHz																																																																																							
ANT	CDD 1+2																																																																																							
Pol.	Vertical					Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2023-11-27 Frequency (MHz) <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5416.55</td><td>47.42</td><td>74.00</td><td>-26.58</td><td></td><td>37.60</td><td>34.63</td><td>8.47</td><td>33.28</td><td>100</td><td>270</td><td>Peak</td></tr><tr><td>2</td><td>5460.00</td><td>45.99</td><td>68.30</td><td>-22.31</td><td></td><td>36.27</td><td>34.66</td><td>8.41</td><td>33.35</td><td>100</td><td>270</td><td>Peak</td></tr><tr><td>3</td><td>5690.00</td><td>105.65</td><td>-----</td><td>95.47</td><td></td><td>35.00</td><td>8.54</td><td>33.36</td><td>100</td><td>270</td><td></td><td>Peak</td></tr><tr><td>4</td><td>5880.75</td><td>49.23</td><td>68.30</td><td>-19.07</td><td></td><td>38.41</td><td>35.31</td><td>8.84</td><td>33.33</td><td>100</td><td>270</td><td>Peak</td></tr></tbody></table>						Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	cm	deg		1	5416.55	47.42	74.00	-26.58		37.60	34.63	8.47	33.28	100	270	Peak	2	5460.00	45.99	68.30	-22.31		36.27	34.66	8.41	33.35	100	270	Peak	3	5690.00	105.65	-----	95.47		35.00	8.54	33.36	100	270		Peak	4	5880.75	49.23	68.30	-19.07		38.41	35.31	8.84	33.33	100	270	Peak	Blank				
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	cm	deg																																																																													
1	5416.55	47.42	74.00	-26.58		37.60	34.63	8.47	33.28	100	270	Peak																																																																												
2	5460.00	45.99	68.30	-22.31		36.27	34.66	8.41	33.35	100	270	Peak																																																																												
3	5690.00	105.65	-----	95.47		35.00	8.54	33.36	100	270		Peak																																																																												
4	5880.75	49.23	68.30	-19.07		38.41	35.31	8.84	33.33	100	270	Peak																																																																												
Avg	Level (dBuV/m) Date: 2023-11-27 Frequency (MHz) <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5424.25</td><td>38.19</td><td>54.00</td><td>-15.81</td><td></td><td>28.38</td><td>34.64</td><td>8.46</td><td>33.29</td><td>100</td><td>270</td><td>Peak</td></tr><tr><td>2</td><td>5690.00</td><td>96.75</td><td>-----</td><td>86.57</td><td></td><td>35.00</td><td>8.54</td><td>33.36</td><td>100</td><td>270</td><td></td><td>Average</td></tr></tbody></table>						Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	cm	deg		1	5424.25	38.19	54.00	-15.81		28.38	34.64	8.46	33.29	100	270	Peak	2	5690.00	96.75	-----	86.57		35.00	8.54	33.36	100	270		Average	Blank																														
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	cm	deg																																																																													
1	5424.25	38.19	54.00	-15.81		28.38	34.64	8.46	33.29	100	270	Peak																																																																												
2	5690.00	96.75	-----	86.57		35.00	8.54	33.36	100	270		Average																																																																												

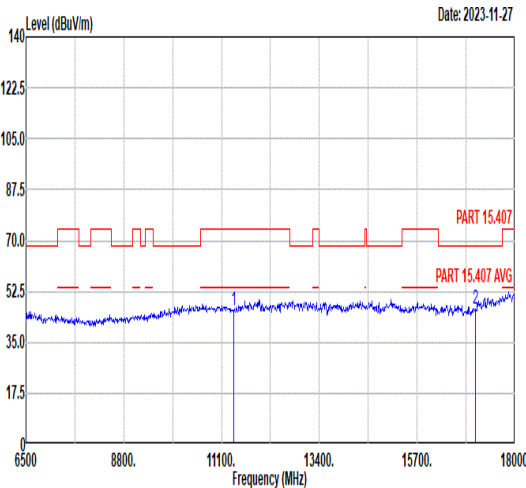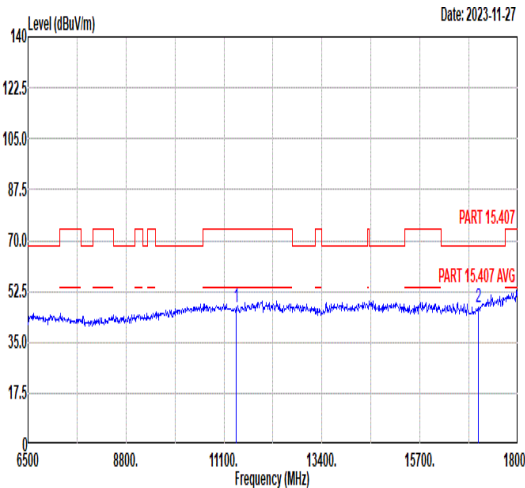

Mode	46																																																																																																																						
	Harmonic																																																																																																																						
	Straddle channels_5.47-5.85_802.11ax HE80_CHCH138_Full_5690MHz																																																																																																																						
ANT	CDD 1+2																																																																																																																						
Pol.	Horizontal						Vertical																																																																																																																
Peak Avg																																																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11380.00</td><td>45.97</td><td>74.00</td><td>-28.03</td><td>53.97</td><td>38.48</td><td>11.40</td><td>57.88</td><td>157</td><td>285</td><td>Peak</td></tr><tr><td>2</td><td>17070.00</td><td>46.74</td><td>68.30</td><td>-21.56</td><td>50.57</td><td>41.23</td><td>13.14</td><td>58.20</td><td>165</td><td>246</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11380.00	45.97	74.00	-28.03	53.97	38.48	11.40	57.88	157	285	Peak	2	17070.00	46.74	68.30	-21.56	50.57	41.23	13.14	58.20	165	246	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11380.00</td><td>47.11</td><td>74.00</td><td>-26.89</td><td>55.11</td><td>38.48</td><td>11.40</td><td>57.88</td><td>122</td><td>291</td><td>Peak</td></tr><tr><td>2</td><td>17070.00</td><td>46.77</td><td>68.30</td><td>-21.53</td><td>50.60</td><td>41.23</td><td>13.14</td><td>58.20</td><td>153</td><td>102</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11380.00	47.11	74.00	-26.89	55.11	38.48	11.40	57.88	122	291	Peak	2	17070.00	46.77	68.30	-21.53	50.60	41.23	13.14	58.20	153	102	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	11380.00	45.97	74.00	-28.03	53.97	38.48	11.40	57.88	157	285	Peak																																																																																																												
2	17070.00	46.74	68.30	-21.56	50.57	41.23	13.14	58.20	165	246	Peak																																																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	11380.00	47.11	74.00	-26.89	55.11	38.48	11.40	57.88	122	291	Peak																																																																																																												
2	17070.00	46.77	68.30	-21.53	50.60	41.23	13.14	58.20	153	102	Peak																																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11380.00</td><td>45.97</td><td>74.00</td><td>-28.03</td><td>53.97</td><td>38.48</td><td>11.40</td><td>57.88</td><td>157</td><td>285</td><td>Peak</td></tr><tr><td>2</td><td>17070.00</td><td>46.74</td><td>68.30</td><td>-21.56</td><td>50.57</td><td>41.23</td><td>13.14</td><td>58.20</td><td>165</td><td>246</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11380.00	45.97	74.00	-28.03	53.97	38.48	11.40	57.88	157	285	Peak	2	17070.00	46.74	68.30	-21.56	50.57	41.23	13.14	58.20	165	246	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11380.00</td><td>47.11</td><td>74.00</td><td>-26.89</td><td>55.11</td><td>38.48</td><td>11.40</td><td>57.88</td><td>122</td><td>291</td><td>Peak</td></tr><tr><td>2</td><td>17070.00</td><td>46.77</td><td>68.30</td><td>-21.53</td><td>50.60</td><td>41.23</td><td>13.14</td><td>58.20</td><td>153</td><td>102</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11380.00	47.11	74.00	-26.89	55.11	38.48	11.40	57.88	122	291	Peak	2	17070.00	46.77	68.30	-21.53	50.60	41.23	13.14	58.20	153	102	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	11380.00	45.97	74.00	-28.03	53.97	38.48	11.40	57.88	157	285	Peak																																																																																																												
2	17070.00	46.74	68.30	-21.56	50.57	41.23	13.14	58.20	165	246	Peak																																																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	11380.00	47.11	74.00	-26.89	55.11	38.48	11.40	57.88	122	291	Peak																																																																																																												
2	17070.00	46.77	68.30	-21.53	50.60	41.23	13.14	58.20	153	102	Peak																																																																																																												



Mode	47										
	Band Edge										
	UNII 1_5.15-5.25_802.11a_CHCH40_5200MHz										
ANT	CDD 1+2										
Pol.	Horizontal										Fundamental
Peak	Level (dBuV/m) Date: 2023-12-01										






Mode	47										
	Band Edge										
	UNII 1_5.15-5.25_802.11a_CHCH40_5200MHz										
ANT	CDD 1+2										
Pol.	Vertical										Fundamental
Peak											



Mode	48																																																																																										
	Band Edge																																																																																										
	UNII 1_5.15-5.25_802.11ax HE20_CHCH40_Full RU_5200MHz																																																																																										
ANT	CDD 1+2																																																																																										
Pol.	Horizontal	Fundamental																																																																																									
Peak	Level (dBuV/m) Date: 2023-12-01 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.50</td><td>58.07</td><td>74.00</td><td>-15.93</td><td>48.58</td><td>34.42</td><td>7.92</td><td>32.85</td><td>214</td><td>0 Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.50	58.07	74.00	-15.93	48.58	34.42	7.92	32.85	214	0 Peak	Level (dBuV/m) Date: 2023-12-01 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5200.00</td><td>110.73</td><td>-----</td><td>-----</td><td>101.25</td><td>34.46</td><td>7.95</td><td>32.93</td><td>214</td><td>0 Peak</td></tr><tr><td>2</td><td>5200.00</td><td>105.49</td><td>-----</td><td>-----</td><td>96.01</td><td>34.46</td><td>7.95</td><td>32.93</td><td>214</td><td>0 Average</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5200.00	110.73	-----	-----	101.25	34.46	7.95	32.93	214	0 Peak	2	5200.00	105.49	-----	-----	96.01	34.46	7.95	32.93	214	0 Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5149.50	58.07	74.00	-15.93	48.58	34.42	7.92	32.85	214	0 Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5200.00	110.73	-----	-----	101.25	34.46	7.95	32.93	214	0 Peak																																																																																	
2	5200.00	105.49	-----	-----	96.01	34.46	7.95	32.93	214	0 Average																																																																																	
Avg	Level (dBuV/m) Date: 2023-12-01 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.24</td><td>49.84</td><td>54.00</td><td>-4.16</td><td>40.34</td><td>34.42</td><td>7.92</td><td>32.84</td><td>214</td><td>0 Average</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.24	49.84	54.00	-4.16	40.34	34.42	7.92	32.84	214	0 Average	Blank																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5149.24	49.84	54.00	-4.16	40.34	34.42	7.92	32.84	214	0 Average																																																																																	

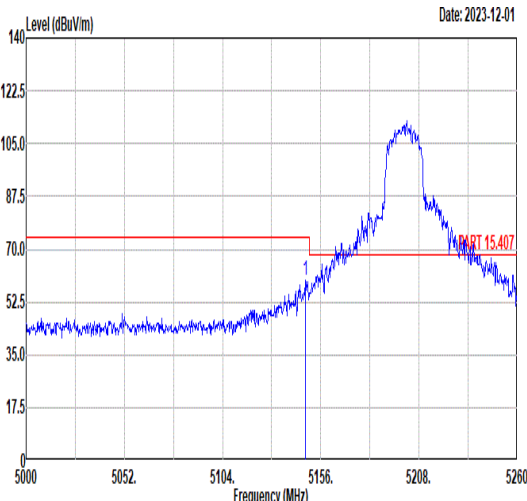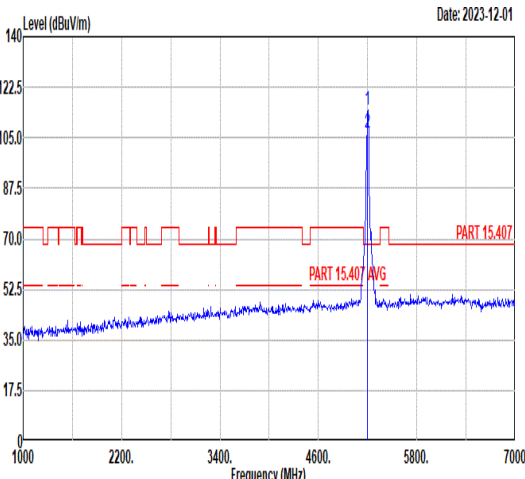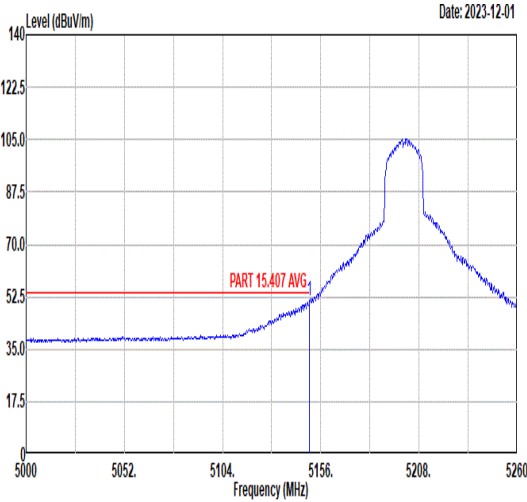

		48																																																																																																							
Mode		Band Edge																																																																																																							
		UNII 1_5.15-5.25_802.11ax HE20_CHCH40_Full RU_5200MHz																																																																																																							
ANT		CDD 1+2																																																																																																							
Pol.		Vertical					Fundamental																																																																																																		
Peak																																																																																																									
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5147.94</td><td>59.64</td><td>74.00</td><td>-14.36</td><td>50.14</td><td>34.42</td><td>7.92</td><td>32.84</td><td>157</td><td>360</td><td>Peak</td></tr></table>							Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5147.94	59.64	74.00	-14.36	50.14	34.42	7.92	32.84	157	360	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5200.00</td><td>114.72</td><td>-----</td><td>105.24</td><td>34.46</td><td>7.95</td><td>32.93</td><td>157</td><td>360</td><td>Peak</td></tr><tr><td>2</td><td>5200.00</td><td>106.85</td><td>-----</td><td>97.37</td><td>34.46</td><td>7.95</td><td>32.93</td><td>157</td><td>360</td><td>Average</td></tr></table>							Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5200.00	114.72	-----	105.24	34.46	7.95	32.93	157	360	Peak	2	5200.00	106.85	-----	97.37	34.46	7.95	32.93	157	360
		Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	5147.94	59.64	74.00	-14.36	50.14	34.42	7.92	32.84	157	360	Peak																																																																																														
		Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	5200.00	114.72	-----	105.24	34.46	7.95	32.93	157	360	Peak																																																																																															
2	5200.00	106.85	-----	97.37	34.46	7.95	32.93	157	360	Average																																																																																															
Avg						Blank																																																																																																			
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5150.00</td><td>51.35</td><td>54.00</td><td>-2.65</td><td>41.86</td><td>34.42</td><td>7.92</td><td>32.85</td><td>157</td><td>360</td><td>Average</td></tr></table>							Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5150.00	51.35	54.00	-2.65	41.86	34.42	7.92	32.85	157	360	Average																																																									
		Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	5150.00	51.35	54.00	-2.65	41.86	34.42	7.92	32.85	157	360	Average																																																																																														



Test Results for Co-location mode:

Mode 41 802.11g CH01 & 802.11ax HE80 CH58

802.11g CH01 (Band Edge @ 3m)

WIFI Ant. CDD 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
Co-location		2390	68.5	-5.5	74	67.93	30.6	4.81	34.84	109	66	P	H
		2390	52.16	-1.84	54	51.59	30.6	4.81	34.84	109	66	A	H
	*	2412	110.68	-----	-----	110.07	30.63	4.81	34.83	109	66	P	H
	*	2412	102.15	-----	-----	101.54	30.63	4.81	34.83	109	66	A	H
		2390	62.38	-11.62	74	61.81	30.6	4.81	34.84	396	290	P	V
		2390	48.34	-5.66	54	47.77	30.6	4.81	34.84	396	290	A	V
	*	2412	102.56	-----	-----	101.95	30.63	4.81	34.83	396	290	P	V
	*	2412	94.27	-----	-----	93.66	30.63	4.81	34.83	396	290	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



802.11ax HE80 CH58 (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
CDD 1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
Co-location		5147.35	48.04	-25.96	74	39.48	34.62	7.91	33.97	275	357	P	H
		5108.15	41.22	-12.78	54	32.77	34.59	7.88	34.02	275	357	A	H
	*	5290	100.11	-----	-----	91.08	34.73	8.17	33.87	275	357	P	H
	*	5290	93.29	-----	-----	84.26	34.73	8.17	33.87	275	357	A	H
		5359.68	61.86	-12.14	74	52.51	34.78	8.38	33.81	275	357	P	H
		5354.4	50.98	-3.02	54	41.63	34.78	8.38	33.81	275	357	A	H
		5147.35	49.87	-24.13	74	41.31	34.62	7.91	33.97	256	7	P	V
		5147.7	41.31	-12.69	54	32.75	34.62	7.91	33.97	256	7	A	V
	*	5290	102.29	-----	-----	93.26	34.73	8.17	33.87	256	7	P	V
	*	5290	95.26	-----	-----	86.23	34.73	8.17	33.87	256	7	A	V
		5367.6	64.51	-9.49	74	55.15	34.79	8.38	33.81	256	7	P	H
		5367.12	52.87	-1.13	54	43.51	34.79	8.38	33.81	256	7	A	H
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



(Harmonic @ 3m)

WIFI Ant.	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
CDD 1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
Co-location		4824	47.33	-26.67	74	62.8	34.26	7.75	57.48	-	-	P	H
		10580	46.99	-21.31	68.3	57.32	37.52	10.9	58.75	-	-	P	H
		15870	47.2	-26.8	74	54.57	39.2	12.71	59.28	-	-	P	H
		4824	48.48	-25.52	74	63.95	34.26	7.75	57.48	-	-	P	V
		10580	46.55	-21.75	68.3	56.88	37.52	10.9	58.75	-	-	P	V
		15870	48.04	-25.96	74	55.41	39.2	12.71	59.28	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



Plots:

Note: For all plots below, the over limit line signals are Fundamental signal which can be ignored.

802.11g CH01 & 802.11ax HE80 CH58

802.11g CH01 (Band Edge @ 3m)

	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	802.11g CH01 & 802.11ax HE80 CH58 Co-location	
	Horizontal	Fundamental
Peak	Date: 1 Level (dBm/Vm) Date: 2023-11-30 1 2390.00 68.50 -5.50 74.00 67.93 30.60 4.81 34.84 109 66 Peak	Date: 3 Level (dBm/Vm) Date: 2023-11-29 1 * 2412.00 110.68 36.68 74.00 110.67 30.63 4.81 34.83 109 66 Peak
Avg.	Date: 2 Level (dBm/Vm) Date: 2023-11-29 1 2390.00 52.16 -1.84 54.00 51.59 30.60 4.81 34.84 109 66 Average	Date: 4 Level (dBm/Vm) Date: 2023-11-29 1 * 2412.00 102.15 48.15 54.00 101.54 30.63 4.81 34.83 109 66 Average



		2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																		
		802.11g CH01 & 802.11ax HE80 CH58 Co-location																																																																		
		Vertical	Fundamental																																																																	
Peak	Date: 5 Level (dBuV/m) Date: 2023-11-29 <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2398.88</td><td>62.38</td><td>-11.62</td><td>74.00</td><td>61.81</td><td>38.68</td><td>4.81</td><td>34.84</td><td>396</td><td>298 Peak</td></tr></tbody></table>		Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg		1	2398.88	62.38	-11.62	74.00	61.81	38.68	4.81	34.84	396	298 Peak	Date: 7 Level (dBuV/m) Date: 2023-11-29 <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 *</td><td>2412.00</td><td>182.56</td><td>28.56</td><td>74.00</td><td>181.95</td><td>38.63</td><td>4.81</td><td>34.83</td><td>396</td><td>298 Peak</td></tr></tbody></table>		Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg		1 *	2412.00	182.56	28.56	74.00	181.95	38.63	4.81	34.83	396	298 Peak
		Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																									
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																											
1	2398.88	62.38	-11.62	74.00	61.81	38.68	4.81	34.84	396	298 Peak																																																										
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																										
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																											
1 *	2412.00	182.56	28.56	74.00	181.95	38.63	4.81	34.83	396	298 Peak																																																										
Avg.	Date: 6 Level (dBuV/m) Date: 2023-11-29 <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2398.88</td><td>48.34</td><td>-5.66</td><td>54.00</td><td>47.77</td><td>38.68</td><td>4.81</td><td>34.84</td><td>396</td><td>298 Average</td></tr></tbody></table>		Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg		1	2398.88	48.34	-5.66	54.00	47.77	38.68	4.81	34.84	396	298 Average	Date: 8 Level (dBuV/m) Date: 2023-11-29 <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 *</td><td>2412.00</td><td>94.27</td><td>48.27</td><td>54.00</td><td>93.66</td><td>38.63</td><td>4.81</td><td>34.83</td><td>396</td><td>298 Average</td></tr></tbody></table>		Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg		1 *	2412.00	94.27	48.27	54.00	93.66	38.63	4.81	34.83	396	298 Average
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																										
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																											
1	2398.88	48.34	-5.66	54.00	47.77	38.68	4.81	34.84	396	298 Average																																																										
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																										
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																											
1 *	2412.00	94.27	48.27	54.00	93.66	38.63	4.81	34.83	396	298 Average																																																										






802.11ax HE80 CH58 (Band Edge @ 3m)

		5GHz 5250~5350MHz Band Edge @ 3m																																																																									
		802.11g CH01 & 802.11ax HE80 CH58 Co-location																																																																									
		Horizontal	Fundamental																																																																								
Peak		Date: 1 Level (dBuV/m) Date: 2023-11-29 5000 5070 5140 5210 5280 5350 Frequency (MHz) <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5247.35</td><td>48.04</td><td>-25.96</td><td>74.00</td><td>39.48</td><td>34.62</td><td>7.91</td><td>33.97</td><td>275</td><td>357 Peak</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg		1	5247.35	48.04	-25.96	74.00	39.48	34.62	7.91	33.97	275	357 Peak	Date: 3 Level (dBuV/m) Date: 2023-11-29 1000 2200 3400 4600 5800 7000 Frequency (MHz) <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5200.00</td><td>100.11</td><td>31.81</td><td>68.30</td><td>01.00</td><td>14.73</td><td>8.17</td><td>33.87</td><td>275</td><td>357 Peak</td></tr><tr><td>2</td><td>5200.00</td><td>93.29</td><td>.....</td><td>84.26</td><td>34.73</td><td>8.17</td><td>33.87</td><td>275</td><td>357 Average</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg		1	5200.00	100.11	31.81	68.30	01.00	14.73	8.17	33.87	275	357 Peak	2	5200.00	93.29		84.26	34.73	8.17	33.87	275	357 Average
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																																			
1	5247.35	48.04	-25.96	74.00	39.48	34.62	7.91	33.97	275	357 Peak																																																																	
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																																			
1	5200.00	100.11	31.81	68.30	01.00	14.73	8.17	33.87	275	357 Peak																																																																	
2	5200.00	93.29		84.26	34.73	8.17	33.87	275	357 Average																																																																		
Avg.		Date: 2 Level (dBuV/m) Date: 2023-11-29 5000 5070 5140 5210 5280 5350 Frequency (MHz) <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5108.15</td><td>41.22</td><td>-12.78</td><td>54.00</td><td>32.77</td><td>34.59</td><td>7.88</td><td>34.82</td><td>275</td><td>357 Average</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg		1	5108.15	41.22	-12.78	54.00	32.77	34.59	7.88	34.82	275	357 Average	Blank																																									
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																																			
1	5108.15	41.22	-12.78	54.00	32.77	34.59	7.88	34.82	275	357 Average																																																																	



		5GHz 5250~5350MHz Band Edge @ 3m																																	
		802.11g CH01 & 802.11ax HE80 CH58 Co-location																																	
	Horizontal	Fundamental																																	
Peak	Date: 4 Date: 2023-11-29 Level (dBm/100kHz) Frequency (MHz) <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBm/100kHz</th><th>dB</th><th>dBm/100kHz</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5359.68</td><td>61.86</td><td>-12.14</td><td>74.00</td><td>52.51</td><td>34.78</td><td>8.38 33.81 275 357 Peak</td></tr></table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Factor	Loss	Factor		MHz	dBm/100kHz	dB	dBm/100kHz	dB	dB	cm	deg	1	5359.68	61.86	-12.14	74.00	52.51	34.78	8.38 33.81 275 357 Peak	Blank	
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																												
Freq	Level	Limit	Level	Factor	Loss	Factor																													
MHz	dBm/100kHz	dB	dBm/100kHz	dB	dB	cm	deg																												
1	5359.68	61.86	-12.14	74.00	52.51	34.78	8.38 33.81 275 357 Peak																												
Avg.	Date: 5 Date: 2023-11-29 Level (dBm/100kHz) Frequency (MHz) <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBm/100kHz</th><th>dB</th><th>dBm/100kHz</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5354.48</td><td>58.98</td><td>-3.82</td><td>54.00</td><td>41.63</td><td>34.78</td><td>8.38 33.81 275 357 Average</td></tr></table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Factor	Loss	Factor		MHz	dBm/100kHz	dB	dBm/100kHz	dB	dB	cm	deg	1	5354.48	58.98	-3.82	54.00	41.63	34.78	8.38 33.81 275 357 Average	Blank	
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																												
Freq	Level	Limit	Level	Factor	Loss	Factor																													
MHz	dBm/100kHz	dB	dBm/100kHz	dB	dB	cm	deg																												
1	5354.48	58.98	-3.82	54.00	41.63	34.78	8.38 33.81 275 357 Average																												



5GHz 5250~5350MHz Band Edge @ 3m																																																																										
802.11g CH01 & 802.11ax HE80 CH58 Co-location																																																																										
	Vertical	Fundamental																																																																								
Peak	Date: 6 Level (dBuV/m) Date: 2023.11.29  Frequency (MHz) <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>5147.35</td><td>49.87</td><td>-24.13</td><td>74.00</td><td>41.31</td><td>34.62</td><td>7.91 33.97 256 7 Peak</td></tr></table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	1	5147.35	49.87	-24.13	74.00	41.31	34.62	7.91 33.97 256 7 Peak	Date: 8 Level (dBuV/m) Date: 2023.11.29  Frequency (MHz) <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>5298.00</td><td>182.29</td><td>33.99</td><td>68.30</td><td>93.26</td><td>34.73</td><td>8.17 33.87 256 7 Peak</td></tr><tr><td>2</td><td>5298.00</td><td>95.26</td><td>-----</td><td>86.23</td><td>34.73</td><td>8.17 33.87</td><td>256 7 Average</td></tr></table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	1	5298.00	182.29	33.99	68.30	93.26	34.73	8.17 33.87 256 7 Peak	2	5298.00	95.26	-----	86.23	34.73	8.17 33.87	256 7 Average
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																			
Freq	Level	Limit	Level	Factor	Loss	Factor																																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm																																																																			
1	5147.35	49.87	-24.13	74.00	41.31	34.62	7.91 33.97 256 7 Peak																																																																			
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																			
Freq	Level	Limit	Level	Factor	Loss	Factor																																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm																																																																			
1	5298.00	182.29	33.99	68.30	93.26	34.73	8.17 33.87 256 7 Peak																																																																			
2	5298.00	95.26	-----	86.23	34.73	8.17 33.87	256 7 Average																																																																			
Avg.	Date: 7 Level (dBuV/m) Date: 2023.11.29  Frequency (MHz) <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>5147.70</td><td>41.31</td><td>-12.69</td><td>54.00</td><td>32.75</td><td>34.62</td><td>7.91 33.97 256 7 Average</td></tr></table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	1	5147.70	41.31	-12.69	54.00	32.75	34.62	7.91 33.97 256 7 Average	Blank																																								
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																			
Freq	Level	Limit	Level	Factor	Loss	Factor																																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm																																																																			
1	5147.70	41.31	-12.69	54.00	32.75	34.62	7.91 33.97 256 7 Average																																																																			



		5GHz 5250~5350MHz Band Edge @ 3m																																	
		802.11g CH01 & 802.11ax HE80 CH58 Co-location																																	
	Vertical	Fundamental																																	
Peak	Date: 9 Level (dBuV/m) Frequency (MHz) <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5367.68</td><td>64.51</td><td>-9.49</td><td>74.00</td><td>55.15</td><td>34.79</td><td>8.38 33.81 256 7 Peak</td></tr></table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	5367.68	64.51	-9.49	74.00	55.15	34.79	8.38 33.81 256 7 Peak	Blank	
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																											
Freq	Level	Limit	Level	Factor	Loss	Factor																													
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																												
1	5367.68	64.51	-9.49	74.00	55.15	34.79	8.38 33.81 256 7 Peak																												
Avg.	Date: 10 Level (dBuV/m) Frequency (MHz) <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5367.12</td><td>52.87</td><td>-1.13</td><td>54.00</td><td>43.51</td><td>34.79</td><td>8.38 33.81 256 7 Average</td></tr></table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	5367.12	52.87	-1.13	54.00	43.51	34.79	8.38 33.81 256 7 Average	Blank	
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																											
Freq	Level	Limit	Level	Factor	Loss	Factor																													
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																												
1	5367.12	52.87	-1.13	54.00	43.51	34.79	8.38 33.81 256 7 Average																												



802.11g CH01 & 802.11ax HE80 CH58 (Harmonic @ 3m)


	Harmonic @ 3m																																																																																																					
	802.11g CH01 & 802.11ax HE80 CH58 Co-location																																																																																																					
	Horizontal	Vertical																																																																																																				
Peak	Date: 7 Level (dBuV/m) Date: 2023-11-30 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 3000 6000 9000 12000 15000 18000 Frequency (MHz) <table><tr><th>Frq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 4624.00</td><td>47.33</td><td>-26.67</td><td>74.00</td><td>62.68</td><td>14.26</td><td>7.75</td><td>57.48</td><td>---</td><td>Peak</td></tr><tr><td>2 10500.00</td><td>46.99</td><td>-21.21</td><td>69.30</td><td>57.32</td><td>37.52</td><td>18.90</td><td>58.75</td><td>---</td><td>Peak</td></tr><tr><td>3 15870.00</td><td>47.20</td><td>-26.80</td><td>74.00</td><td>54.57</td><td>39.20</td><td>12.71</td><td>59.28</td><td>---</td><td>Peak</td></tr></table>	Frq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg		1 4624.00	47.33	-26.67	74.00	62.68	14.26	7.75	57.48	---	Peak	2 10500.00	46.99	-21.21	69.30	57.32	37.52	18.90	58.75	---	Peak	3 15870.00	47.20	-26.80	74.00	54.57	39.20	12.71	59.28	---	Peak	Date: 8 Level (dBuV/m) Date: 2023-11-30 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 3000 6000 9000 12000 15000 18000 Frequency (MHz) <table><tr><th>Frq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 4624.00</td><td>48.48</td><td>-25.52</td><td>74.00</td><td>63.05</td><td>14.26</td><td>7.75</td><td>57.48</td><td>---</td><td>Peak</td></tr><tr><td>2 10500.00</td><td>46.55</td><td>-21.75</td><td>69.30</td><td>56.88</td><td>37.52</td><td>18.90</td><td>58.75</td><td>---</td><td>Peak</td></tr><tr><td>3 15870.00</td><td>48.04</td><td>-25.96</td><td>74.00</td><td>55.41</td><td>39.20</td><td>12.71</td><td>59.28</td><td>---</td><td>Peak</td></tr></table>	Frq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg		1 4624.00	48.48	-25.52	74.00	63.05	14.26	7.75	57.48	---	Peak	2 10500.00	46.55	-21.75	69.30	56.88	37.52	18.90	58.75	---	Peak	3 15870.00	48.04	-25.96	74.00	55.41	39.20	12.71	59.28	---	Peak
	Frq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																																																														
1 4624.00	47.33	-26.67	74.00	62.68	14.26	7.75	57.48	---	Peak																																																																																													
2 10500.00	46.99	-21.21	69.30	57.32	37.52	18.90	58.75	---	Peak																																																																																													
3 15870.00	47.20	-26.80	74.00	54.57	39.20	12.71	59.28	---	Peak																																																																																													
Frq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																													
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																																																														
1 4624.00	48.48	-25.52	74.00	63.05	14.26	7.75	57.48	---	Peak																																																																																													
2 10500.00	46.55	-21.75	69.30	56.88	37.52	18.90	58.75	---	Peak																																																																																													
3 15870.00	48.04	-25.96	74.00	55.41	39.20	12.71	59.28	---	Peak																																																																																													

Appendix D. Duty Cycle Plots

For CDD mode:


Antenna	Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
1+2	802.11a	93.07	1.362	0.734	1kHz
1+2	802.11ax HE20	91.05	0.988	1.012	3kHz
1+2	802.11ax HE40	97.30	0.522	1.916	3kHz
1+2	802.11ax HE80	95.55	0.280	3.571	10kHz

802.11a

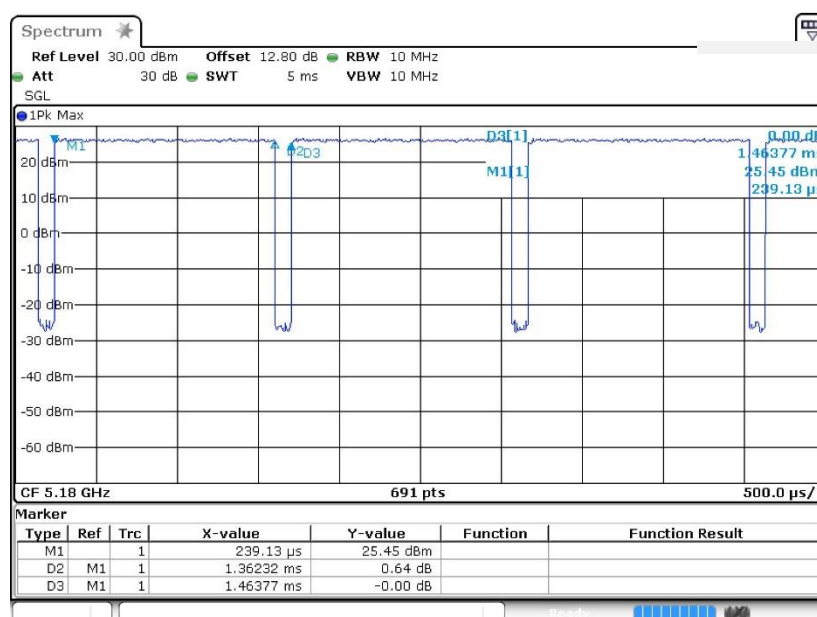




802.11ax HE20

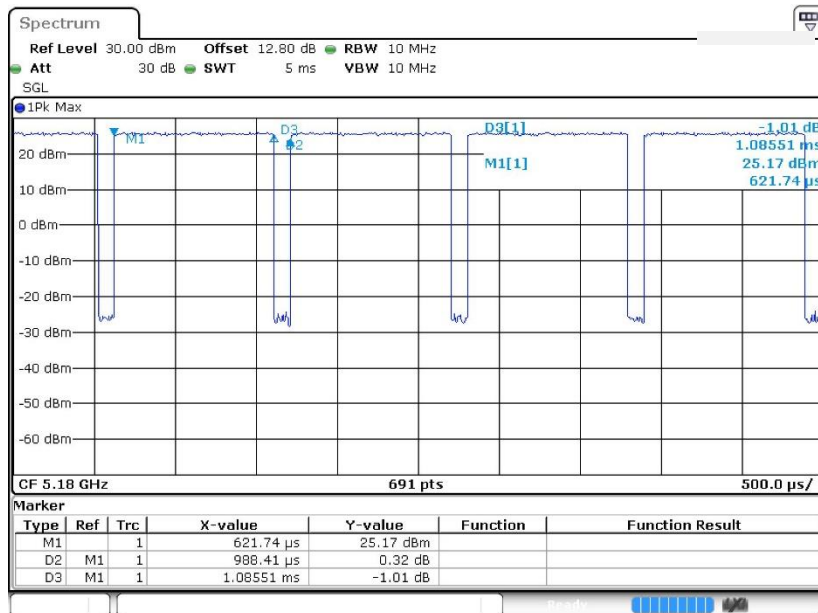

802.11ax HE40

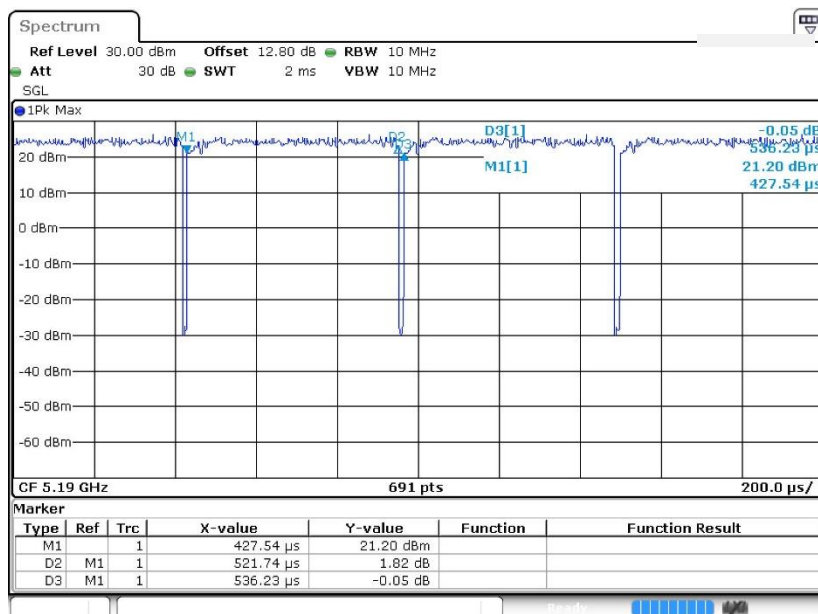



802.11ax HE80

