



# 8 Band Edge Measurement

Test Requirement : Section 15.247(d) In addition, radiated emissions which fall in the

restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section

15.205(c)).

Test Method : ANSI C63.10:2013

Test Limit : Regulation 15.247 (d), In any 100 kHz bandwidth outside the

frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated

measurement, provided the transmitter demonstrates compliance with the

peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time

interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20

dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission


limits specified in §15.209(a) (see §15.205(c)).

#### **8.1Test Procedure**

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;

2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto Detector function = peak, Trace = max hold


#### 8.2Test Setup



| TestMode  | Antenna | ChName | Frequency[MHz] | RefLevel[dBm] | Result[dBm] | Limit[dBm] | Verdict |
|-----------|---------|--------|----------------|---------------|-------------|------------|---------|
| 11B       | Ant1    | Low    | 2412           | 5.82          | -40.95      | ≤-24.18    | PASS    |
| 11B       | Ant1    | High   | 2462           | 5.71          | -44.48      | ≤-24.29    | PASS    |
| 11G       | Ant1    | Low    | 2412           | 2.48          | -36.92      | ≤-27.52    | PASS    |
| 11G       | Ant1    | High   | 2462           | 0.77          | -46.34      | ≤-29.24    | PASS    |
| 11N20SISO | Ant1    | Low    | 2412           | 1.52          | -35.62      | ≤-28.48    | PASS    |
| 11N20SISO | Ant1    | High   | 2462           | 1.79          | -44.12      | ≤-28.21    | PASS    |
| 11N40SISO | Ant1    | Low    | 2422           | 0.03          | -38.94      | ≤-29.97    | PASS    |
| 11N40SISO | Ant1    | High   | 2452           | -0.62         | -44.03      | ≤-30.62    | PASS    |




## **Test Graphs:**

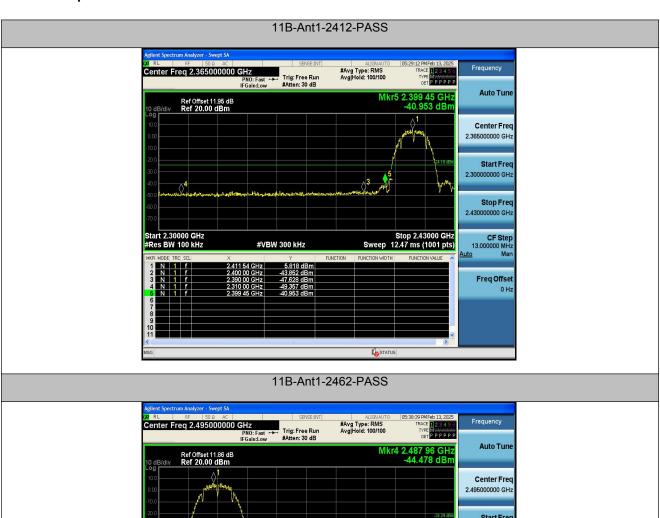


Ref Offset 11.85 dB Ref 20.00 dBm -44.478 dBm Ref 20.00 dBm Ref 20

11G-Ant1-2412-PASS




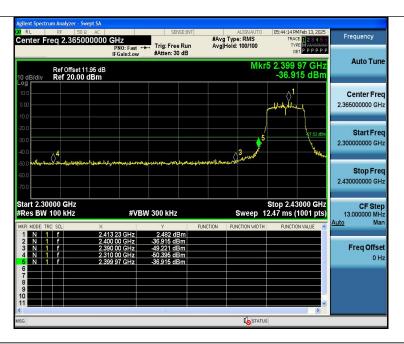


## 11G-Ant1-2462-PASS

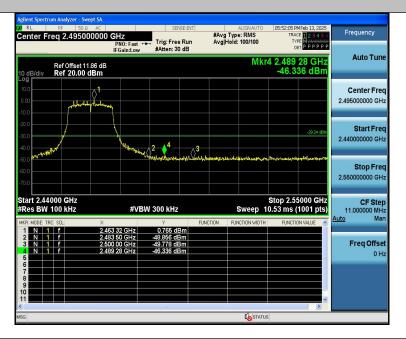


11N20SISO-Ant1-2412-PASS

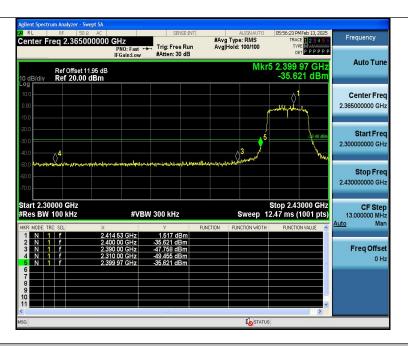

## 11N20SISO-Ant1-2462-PASS

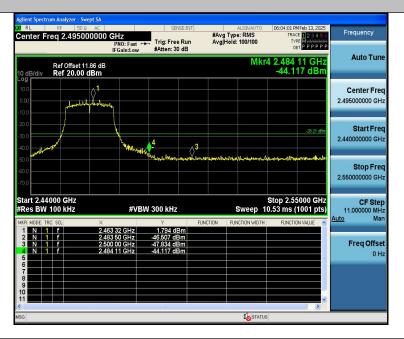


11N40SISO-Ant1-2422-PASS







## 11N40SISO-Ant1-2452-PASS

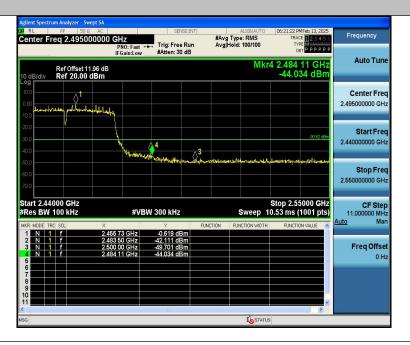



## 9 6dB Bandwidth Measurement

Test Requirement FCC CFR47 Part 15 Section 15.247

**Test Method** ANSI C63.10:2013

Systems using digital modulation techniques may operate in the 902-928 **Test Limit** 

MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB


bandwidth shall be at least 500 kHz.

#### 9.1Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;

2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

## 9.2Test Setup



| TestMode  | Antenna | Frequency[MHz] | DTS BW<br>[MHz] | FL[MHz]  | FH[MHz]  | Limit[MHz] | Verdict |
|-----------|---------|----------------|-----------------|----------|----------|------------|---------|
| 11B       | Ant1    | 2412           | 10.080          | 2406.960 | 2417.040 | 0.5        | PASS    |
| 11B       | Ant1    | 2437           | 10.120          | 2431.960 | 2442.080 | 0.5        | PASS    |
| 11B       | Ant1    | 2462           | 10.080          | 2456.960 | 2467.040 | 0.5        | PASS    |
| 11G       | Ant1    | 2412           | 16.240          | 2403.880 | 2420.120 | 0.5        | PASS    |
| 11G       | Ant1    | 2437           | 16.000          | 2429.160 | 2445.160 | 0.5        | PASS    |
| 11G       | Ant1    | 2462           | 15.760          | 2454.120 | 2469.880 | 0.5        | PASS    |
| 11N20SISO | Ant1    | 2412           | 16.240          | 2404.160 | 2420.400 | 0.5        | PASS    |
| 11N20SISO | Ant1    | 2437           | 17.520          | 2428.240 | 2445.760 | 0.5        | PASS    |
| 11N20SISO | Ant1    | 2462           | 17.320          | 2453.440 | 2470.760 | 0.5        | PASS    |
| 11N40SISO | Ant1    | 2422           | 35.360          | 2404.160 | 2439.520 | 0.5        | PASS    |
| 11N40SISO | Ant1    | 2437           | 35.040          | 2419.560 | 2454.600 | 0.5        | PASS    |
| 11N40SISO | Ant1    | 2452           | 35.040          | 2434.480 | 2469.520 | 0.5        | PASS    |




#### **Test Graphs:**








## 11G-Ant1-2412-PASS

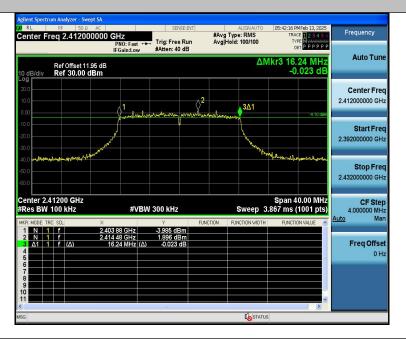

11G-Ant1-2437-PASS



## 11G-Ant1-2462-PASS

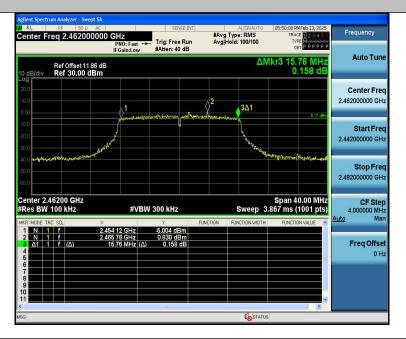

11N20SISO-Ant1-2412-PASS



## 11N20SISO-Ant1-2437-PASS




11N20SISO-Ant1-2462-PASS






## 11N40SISO-Ant1-2422-PASS

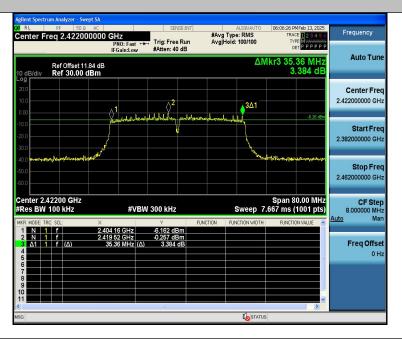


11N40SISO-Ant1-2437-PASS







## 11N40SISO-Ant1-2452-PASS

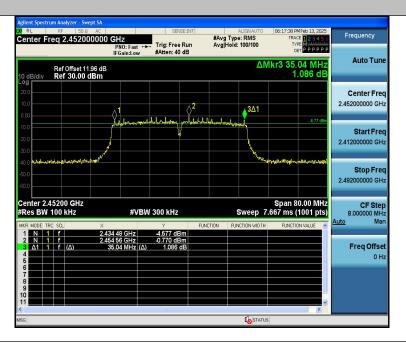



# 10 Maximum conducted output power

Test Requirement : FCC CFR47 Part 15 Section 15.247

Test Method : ANSI C63.10:2013

Test Limit : Regulation 15.247 (b)(3), For systems using digital modulation in the 902-


928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output

power.

#### 10.1Test Procedure

1. According to ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter method. The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

### 10.2Test Setup



| TestMode  | Antenna | Frequency[<br>MHz] | Set<br>Power | AV Powert[dBm] | Conducted<br>Limit[dBm] | Verdict |
|-----------|---------|--------------------|--------------|----------------|-------------------------|---------|
| 11B       | Ant1    | 2412               |              | 7.06           | ≤30.00                  | PASS    |
| 11B       | Ant1    | 2437               |              | 7.11           | ≤30.00                  | PASS    |
| 11B       | Ant1    | 2462               |              | 7.04           | ≤30.00                  | PASS    |
| 11G       | Ant1    | 2412               |              | 6.19           | ≤30.00                  | PASS    |
| 11G       | Ant1    | 2437               |              | 6.86           | ≤30.00                  | PASS    |
| 11G       | Ant1    | 2462               |              | 6.44           | ≤30.00                  | PASS    |
| 11N20SISO | Ant1    | 2412               |              | 5.33           | ≤30.00                  | PASS    |
| 11N20SISO | Ant1    | 2437               |              | 4.73           | ≤30.00                  | PASS    |
| 11N20SISO | Ant1    | 2462               |              | 5.48           | ≤30.00                  | PASS    |
| 11N40SISO | Ant1    | 2422               |              | 5.53           | ≤30.00                  | PASS    |
| 11N40SISO | Ant1    | 2437               |              | 4.89           | ≤30.00                  | PASS    |
| 11N40SISO | Ant1    | 2452               |              | 5.36           | ≤30.00                  | PASS    |



# 11 Power Spectral density

Test Requirement : FCC CFR47 Part 15 Section 15.247

Test Method : ANSI C63.10:2013

Test Limit : Regulation 15.247(e) The power spectral density conducted from the

intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation

operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during

any time interval of continuous transmission.

#### 11.1Test Procedure

1. Connect the antenna port(s) to the spectrum analyzer input.

2. Configure the spectrum analyzer as shown below:

Center frequency=DTS channel center frequency

Span = 1.5 times the DTS bandwidth

RBW = 3KHz, VBW = 10KHz


Sweep time = auto couple

Detector = peak


Trace mode =max hold

- 3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
- 4. Use the peak marker function to determine the maximum amplitude level within the RBW.
- 5. If measured value exceeds limit, reduce RBW(no less than 3KHz) and repeat.

#### 11.2Test Setup




| TestMode  | Antenna | Frequency[MHz] | Result[dBm/3-100kHz] | Limit[dBm/3kHz] | Verdict |
|-----------|---------|----------------|----------------------|-----------------|---------|
| 11B       | Ant1    | 2412           | -15.02               | ≤8.00           | PASS    |
| 11B       | Ant1    | 2437           | -14.62               | ≤8.00           | PASS    |
| 11B       | Ant1    | 2462           | -13.83               | ≤8.00           | PASS    |
| 11G       | Ant1    | 2412           | -16.27               | ≤8.00           | PASS    |
| 11G       | Ant1    | 2437           | -17.45               | ≤8.00           | PASS    |
| 11G       | Ant1    | 2462           | -18.47               | ≤8.00           | PASS    |
| 11N20SISO | Ant1    | 2412           | -17.32               | ≤8.00           | PASS    |
| 11N20SISO | Ant1    | 2437           | -19.46               | ≤8.00           | PASS    |
| 11N20SISO | Ant1    | 2462           | -18.29               | ≤8.00           | PASS    |
| 11N40SISO | Ant1    | 2422           | -17.8                | ≤8.00           | PASS    |
| 11N40SISO | Ant1    | 2437           | -14.33               | ≤8.00           | PASS    |
| 11N40SISO | Ant1    | 2452           | -18.07               | ≤8.00           | PASS    |







#### **Test Graphs:**

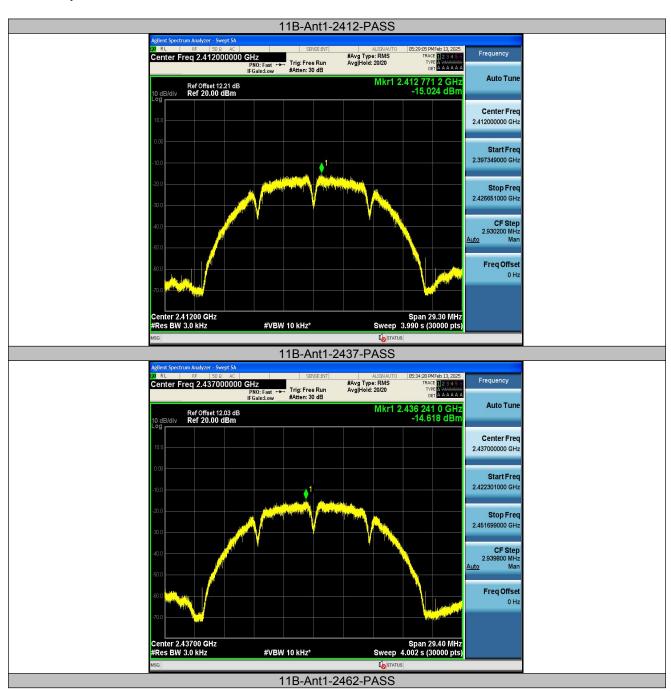






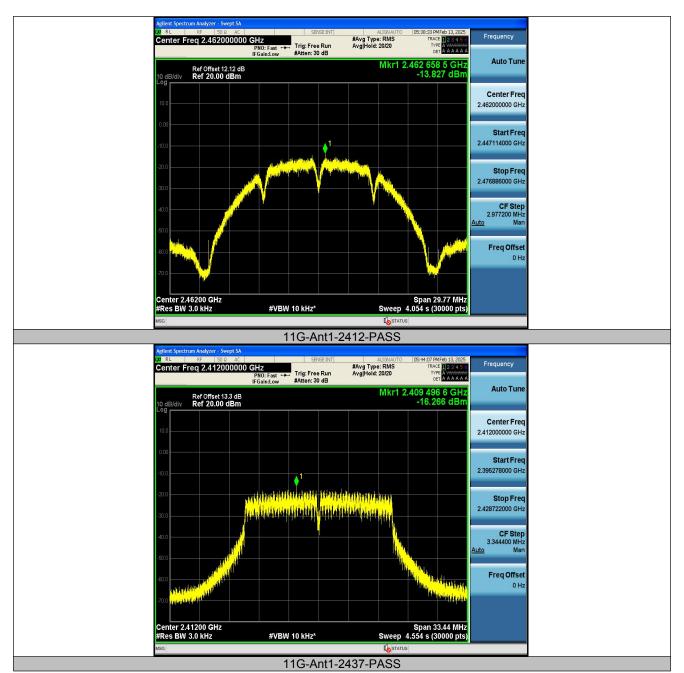





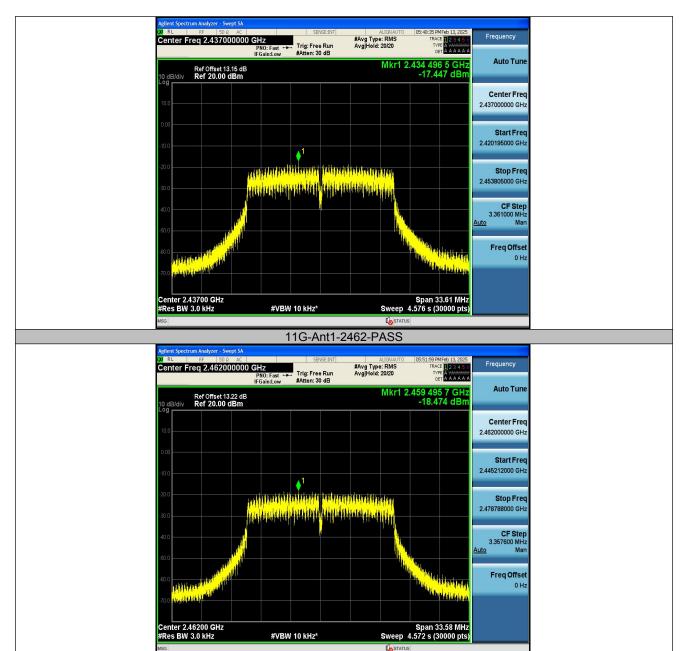

11N20SISO-Ant1-2412-PASS




CF Step 3.573600 MHz

Freq Offset

Span 35.74 MHz Sweep 4.866 s (30000 pts)




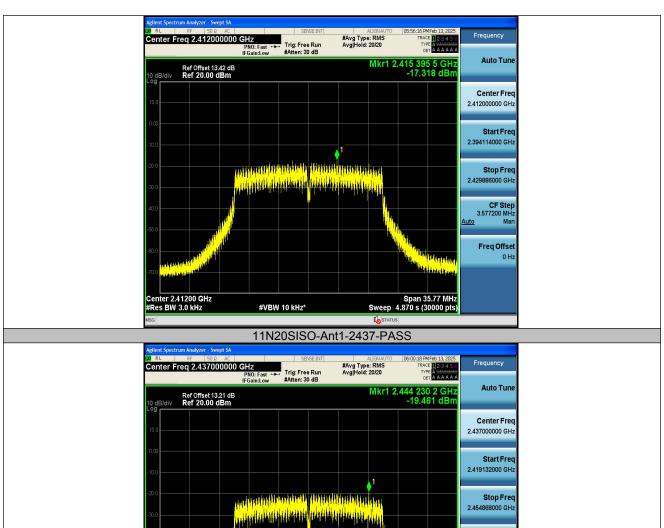


11N20SISO-Ant1-2462-PASS

#VBW 10 kHz\*

Center 2.43700 GHz #Res BW 3.0 kHz






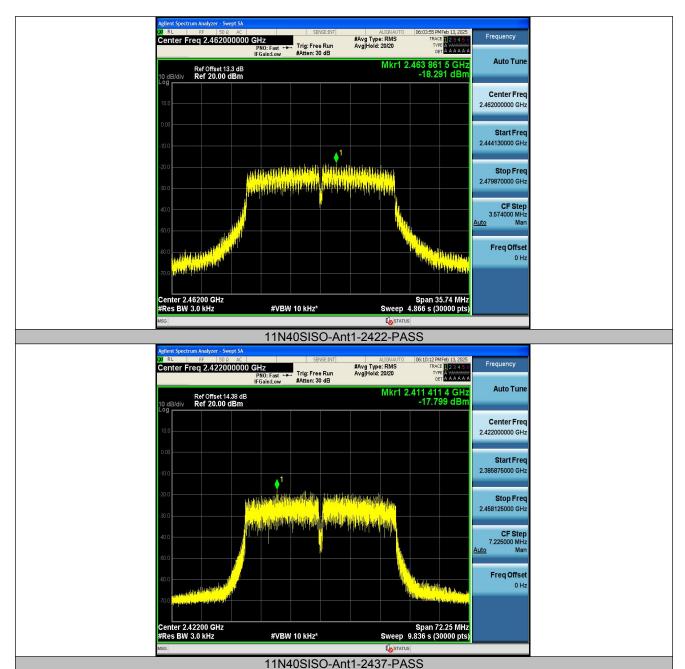





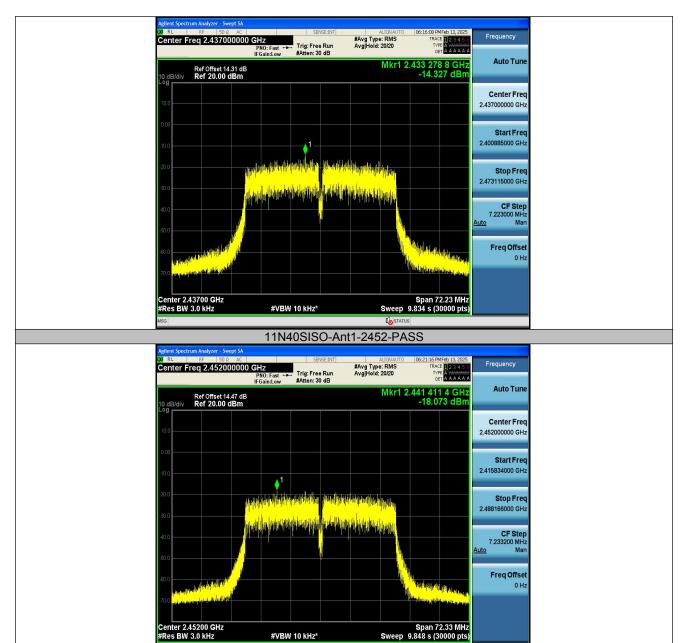



# 12 Antenna Application

## 12.1Antenna Requirement

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


#### 12.2Result

The EUT'S antenna, permanent attached antenna, is PCB Antenna. The antenna's gain is 1.96 dBi and meets the requirement.



# 13 Test Setup



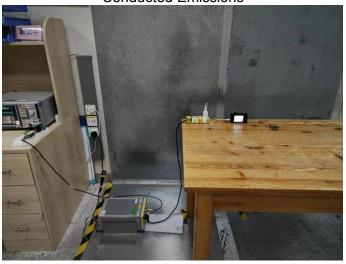

Radiated Spurious Emissions From 30MHz-1000MHz











## 14 EUT PHOTOS

please reference file "EUT photos"

\*\*\*\*\*\*THE END REPORT\*\*\*\*\*