


Test Mode	UNII-2C_TX BE(EHT160) Mode 5570 MHz	Polarization	Vertical
-----------	-------------------------------------	--------------	----------

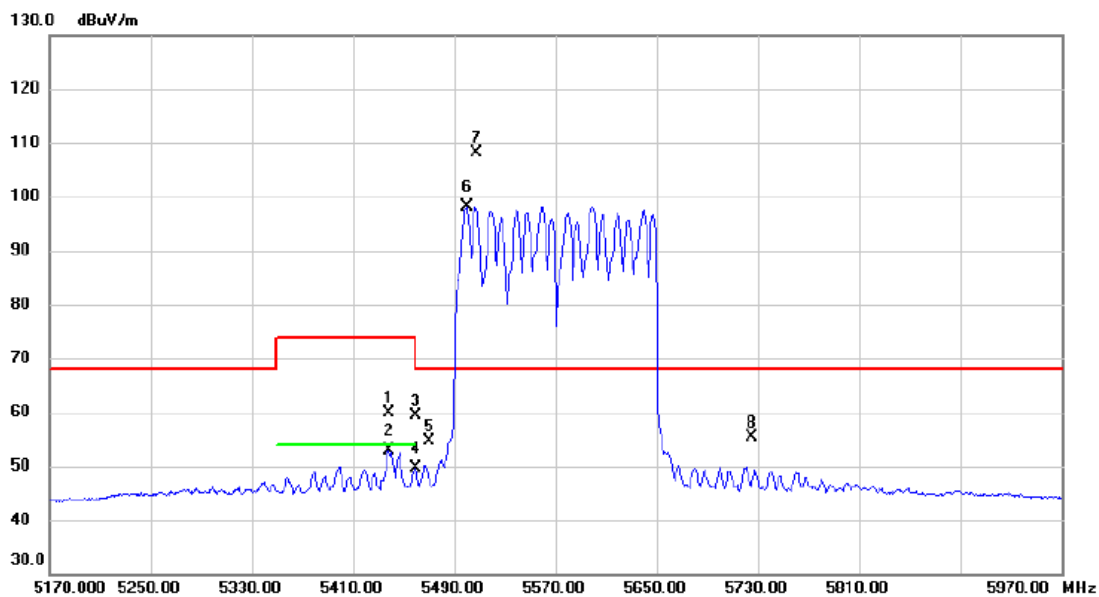


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5438.400	45.64	14.15	59.79	74.00	-14.21	peak	
2		5438.400	38.70	14.15	52.85	54.00	-1.15	AVG	
3		5460.000	45.27	14.21	59.48	74.00	-14.52	peak	
4		5460.000	35.50	14.21	49.71	54.00	-4.29	AVG	
5		5470.000	40.39	14.22	54.61	68.20	-13.59	peak	
6	X	5499.600	83.87	14.29	98.16	68.20	29.96	AVG	No Limit
7	*	5507.600	93.92	14.31	108.23	68.20	40.03	peak	No Limit
8		5725.000	40.34	15.00	55.34	68.20	-12.86	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT160) Mode 5570 MHz	Polarization	Vertical
-----------	-------------------------------------	--------------	----------

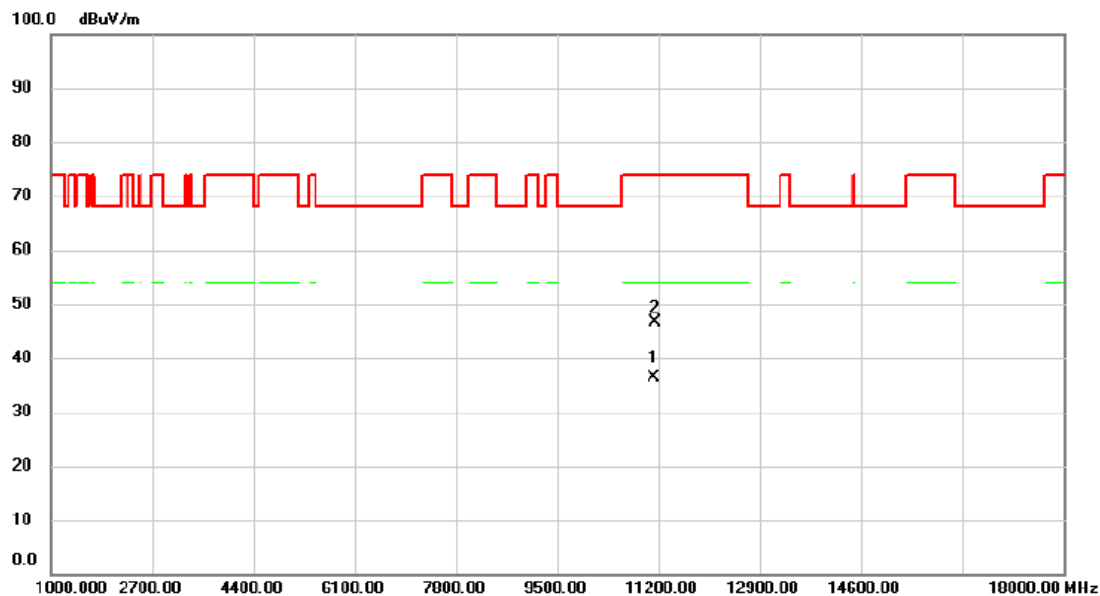


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11118.650	27.05	9.36	36.41	54.00	-17.59	AVG	
2		11139.525	37.30	9.37	46.67	74.00	-27.33	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

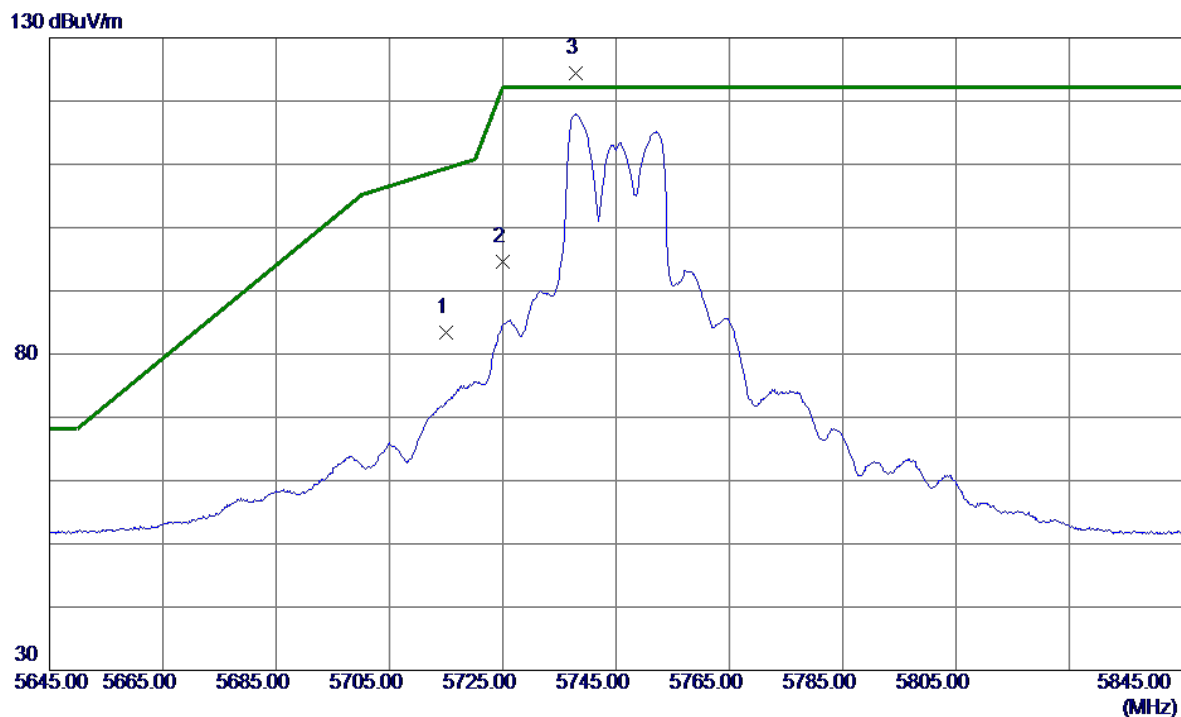


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	68.37	14.97	83.34	109.40	-26.06	Peak	
2	5725.0000	79.68	15.00	94.68	122.20	-27.52	Peak	
3 *	5737.9000	109.44	15.04	124.48	122.20	2.28	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

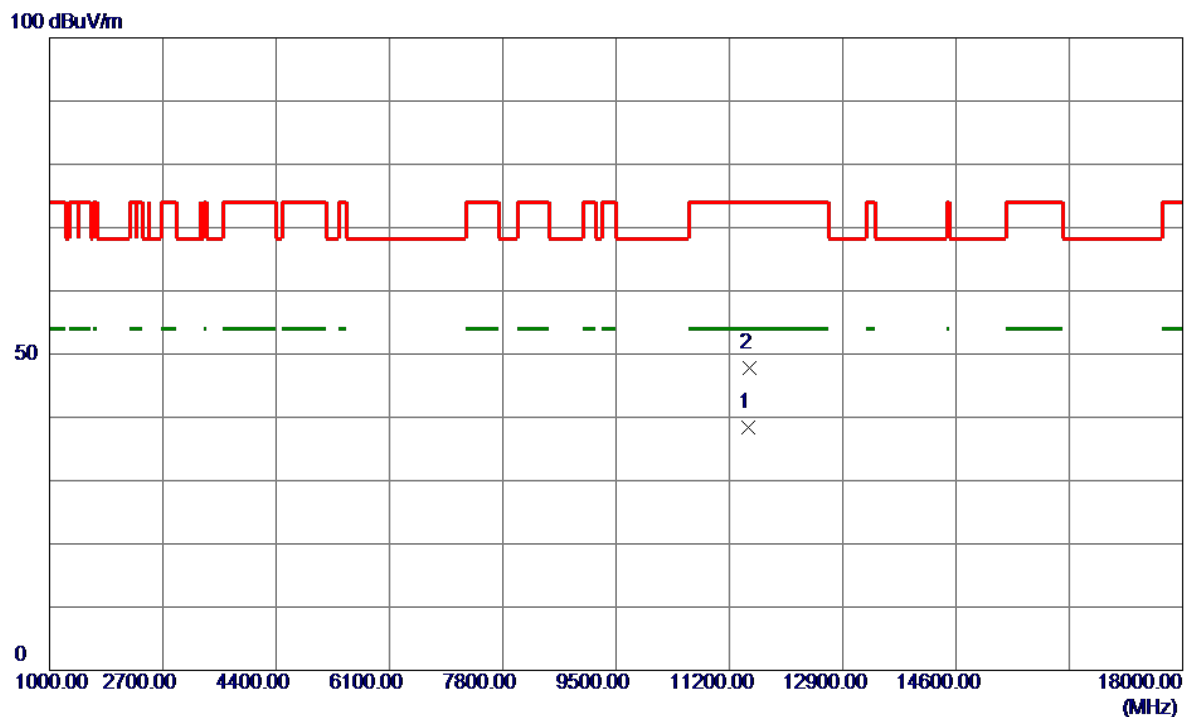


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11492.2750	28.81	9.67	38.48	54.00	-15.52	AVG	
2	11492.9750	38.05	9.67	47.72	74.00	-26.28	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

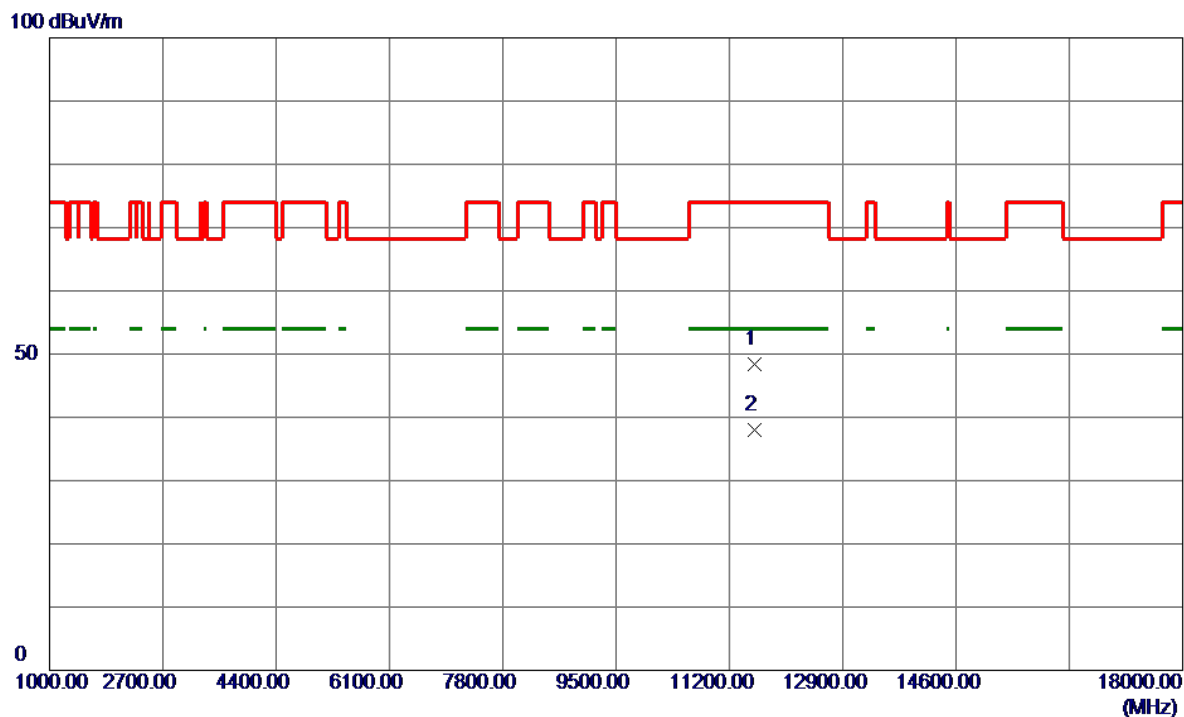


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11573.4250	38.77	9.66	48.43	74.00	-25.57	Peak	
2 *	11574.0000	28.33	9.66	37.99	54.00	-16.01	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

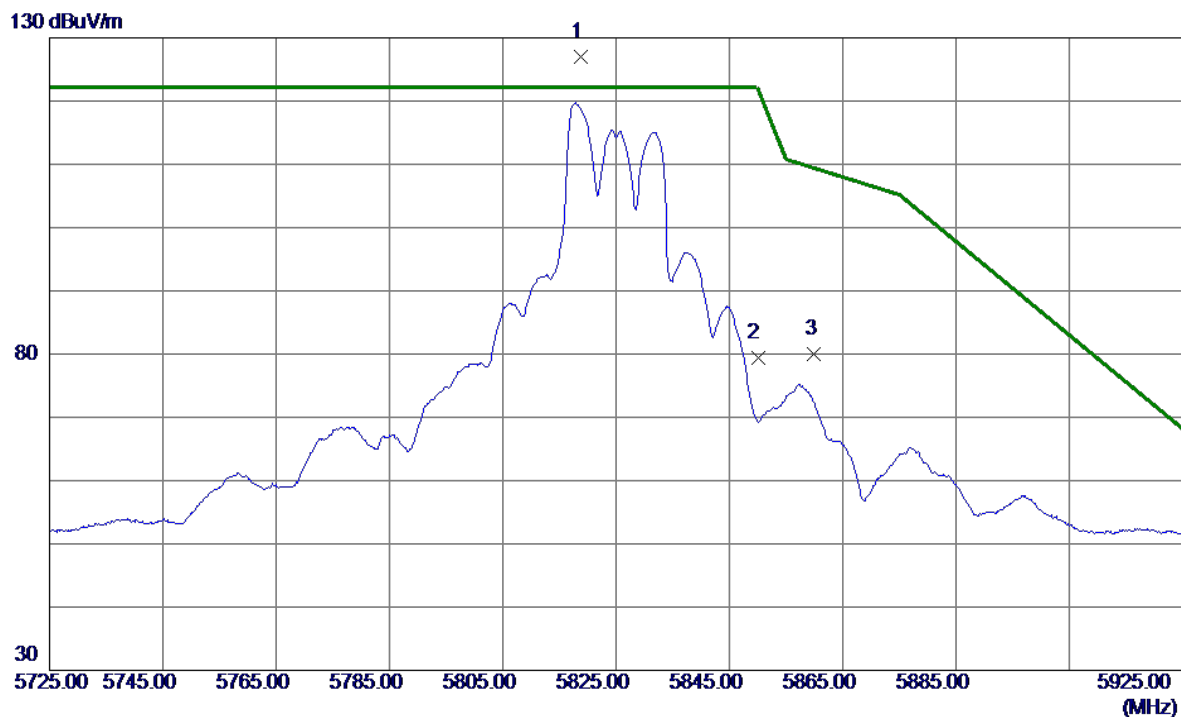


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5818.8000	111.67	15.30	126.97	122.20	4.77	Peak	No Limit
2	5850.0000	64.02	15.39	79.41	122.20	-42.79	Peak	
3	5860.0000	64.60	15.43	80.03	109.40	-29.37	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

100 dBuV/m

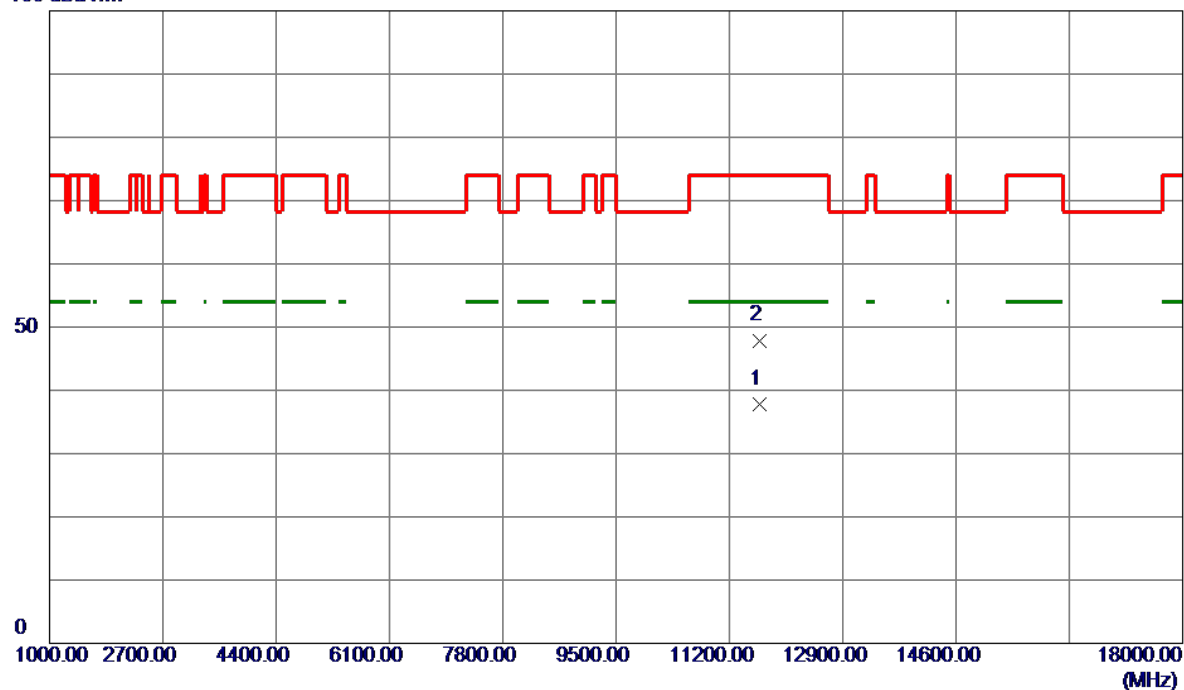


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11652.9000	28.16	9.65	37.81	54.00	-16.19	AVG	
2	11655.5250	38.25	9.65	47.90	74.00	-26.10	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

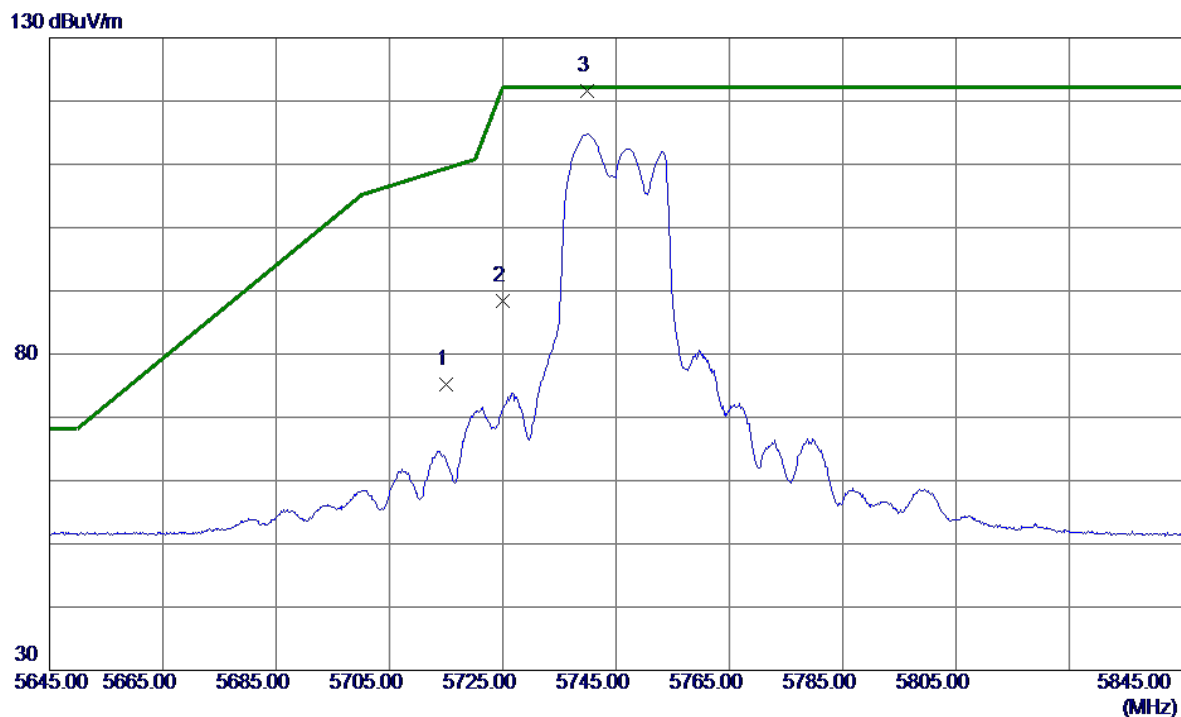


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	60.16	14.97	75.13	109.40	-34.27	Peak	
2	5725.0000	73.48	15.00	88.48	122.20	-33.72	Peak	
3 *	5739.8000	106.62	15.05	121.67	122.20	-0.53	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

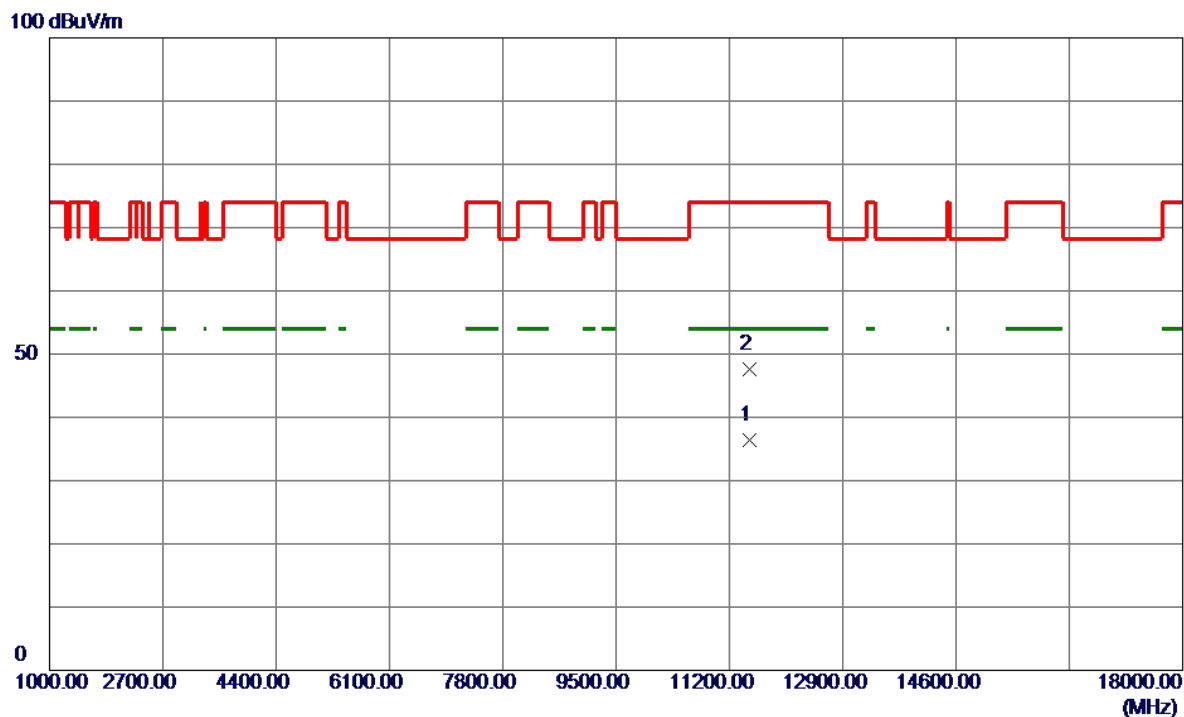


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11497.3500	26.74	9.67	36.41	54.00	-17.59	AVG	
2	11498.2500	38.00	9.67	47.67	74.00	-26.33	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

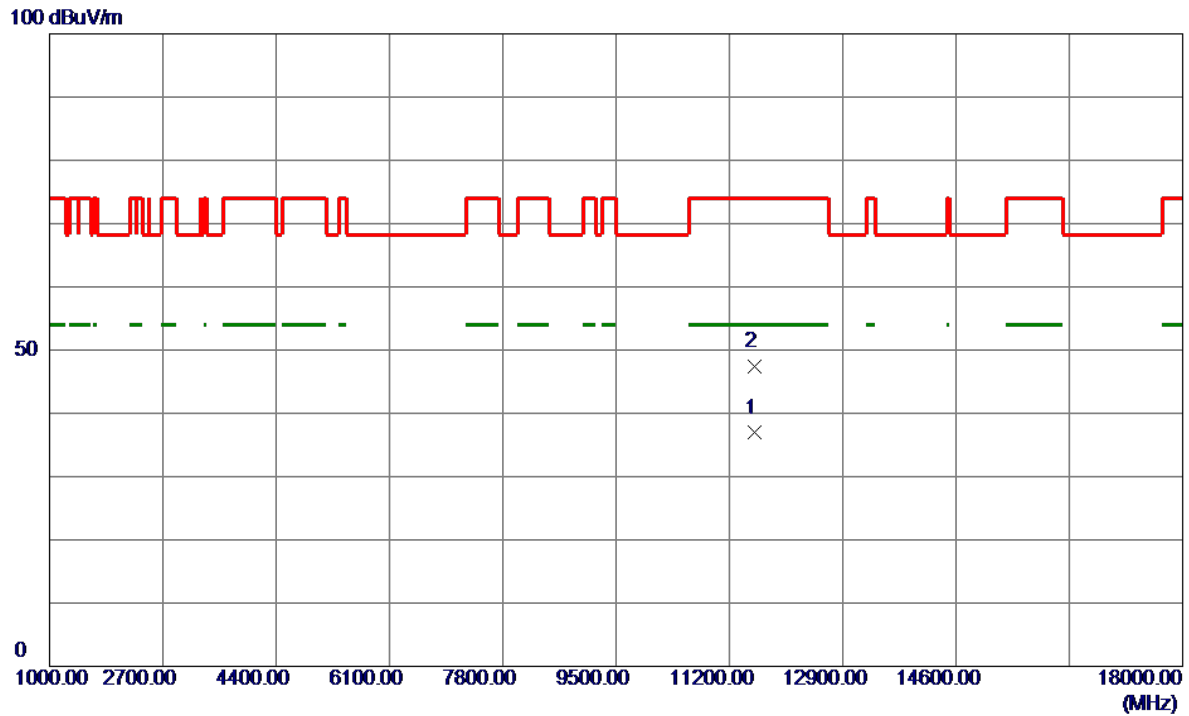


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11574.6250	27.24	9.66	36.90	54.00	-17.10	AVG	
2	11577.3250	37.77	9.66	47.43	74.00	-26.57	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

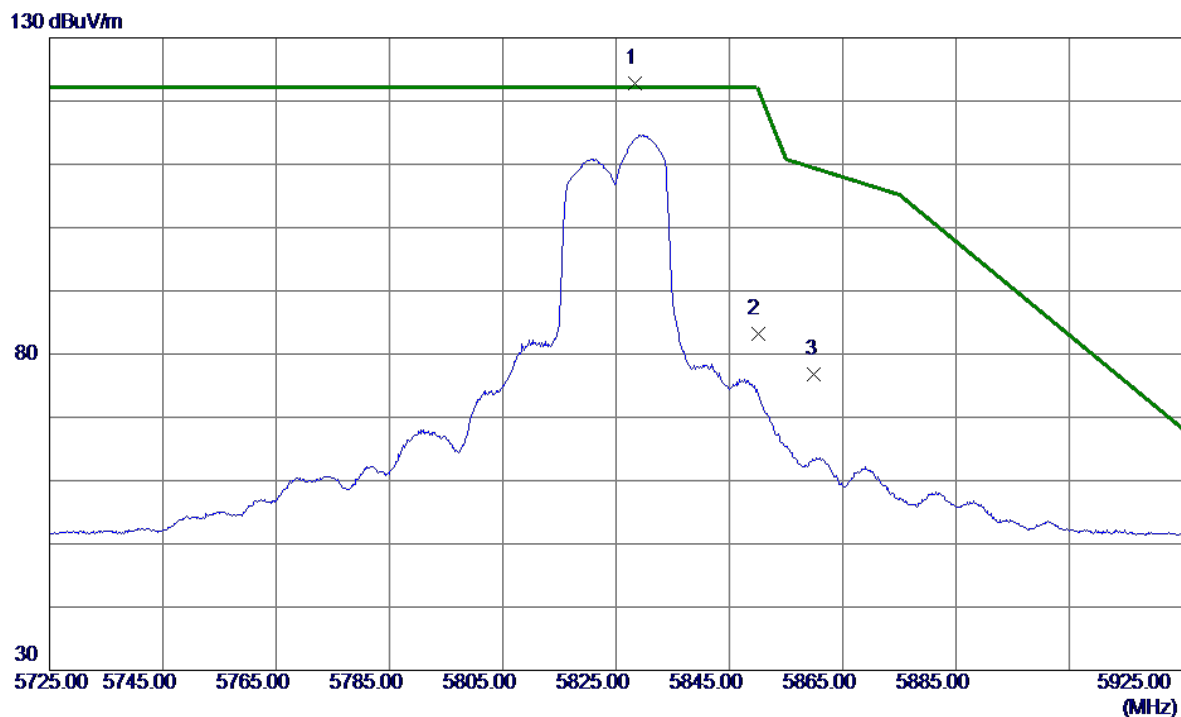


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5828.3000	107.40	15.33	122.73	122.20	0.53	Peak	No Limit
2	5850.0000	67.81	15.39	83.20	122.20	-39.00	Peak	
3	5860.0000	61.32	15.43	76.75	109.40	-32.65	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

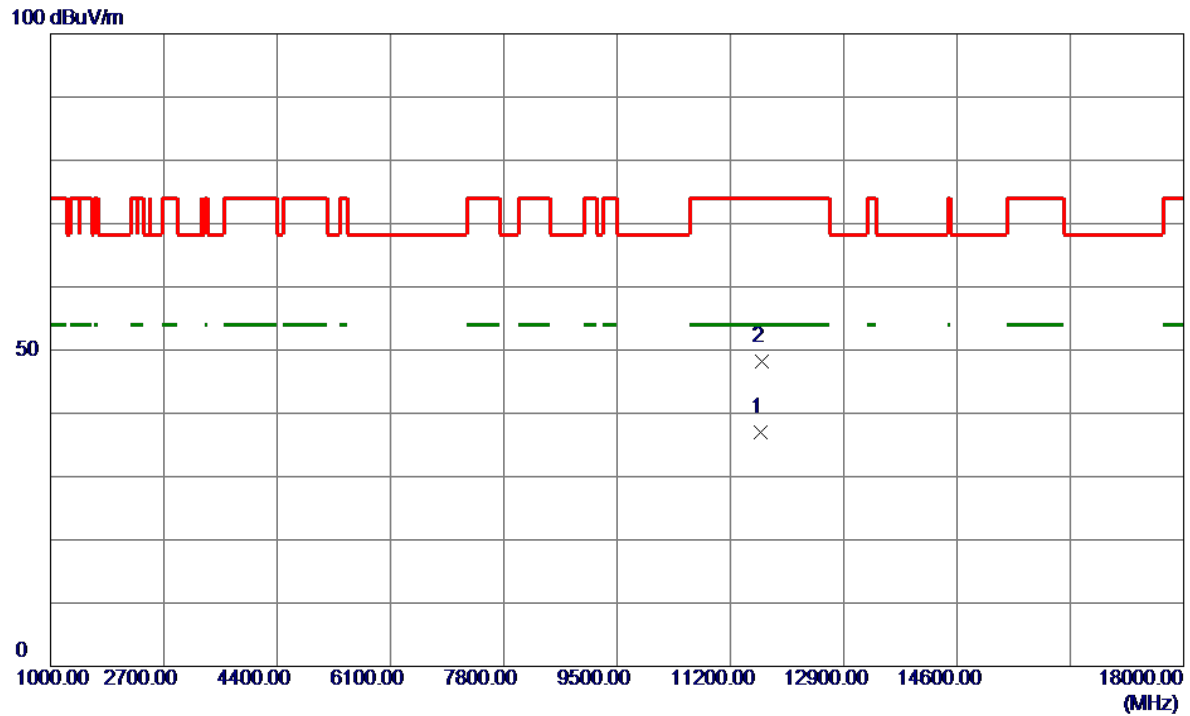


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11655.4250	27.38	9.65	37.03	54.00	-16.97	AVG	
2	11671.1500	38.62	9.65	48.27	74.00	-25.73	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

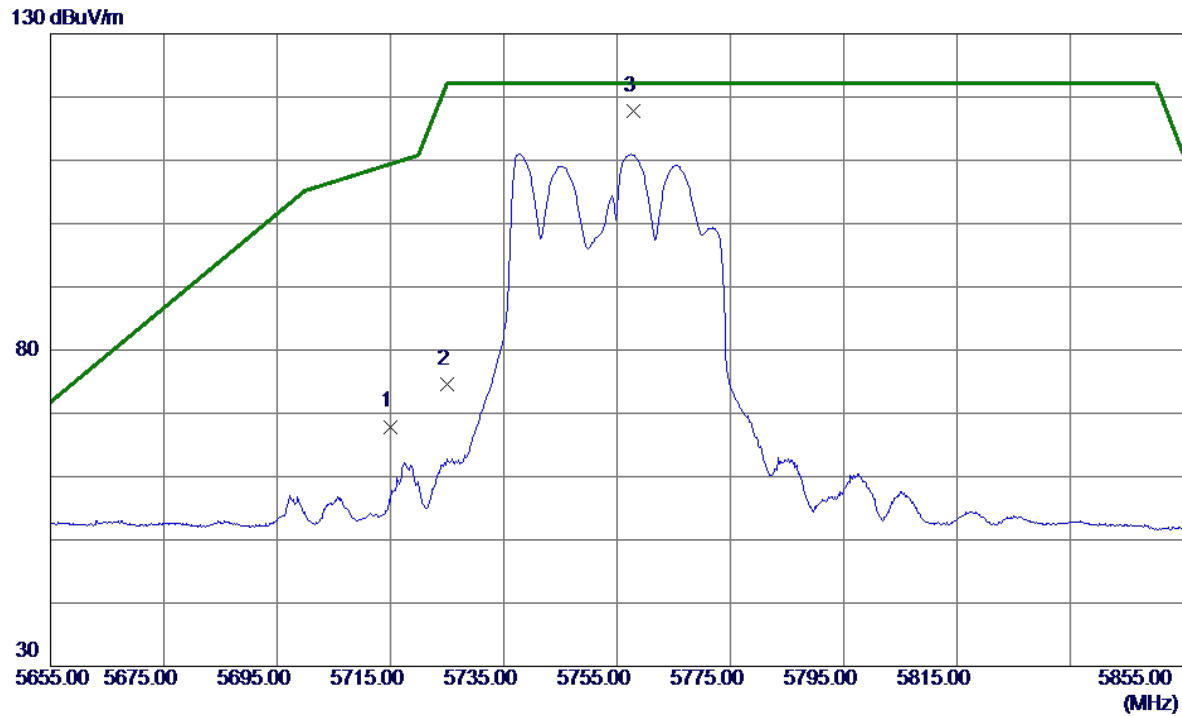


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	52.93	14.97	67.90	109.40	-41.50	Peak	
2	5725.0000	59.51	15.00	74.51	122.20	-47.69	Peak	
3 *	5757.8000	102.62	15.10	117.72	122.20	-4.48	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

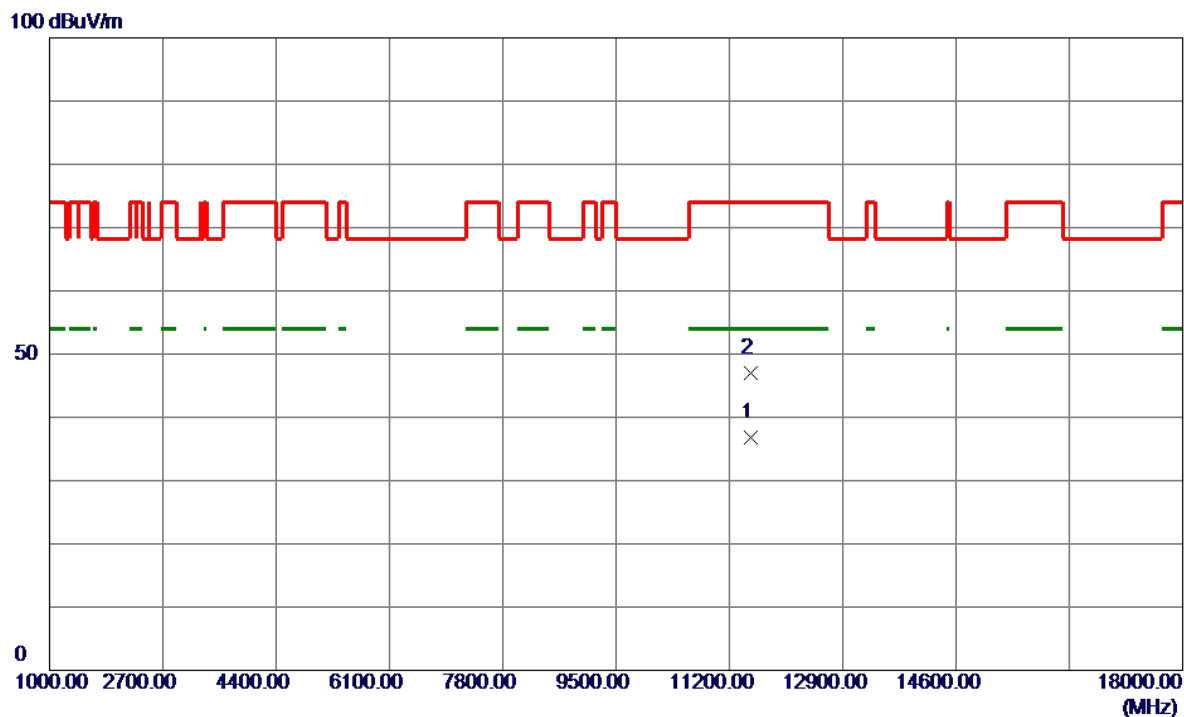


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11513.5500	27.21	9.67	36.88	54.00	-17.12	AVG	
2	11527.4250	37.40	9.67	47.07	74.00	-26.93	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

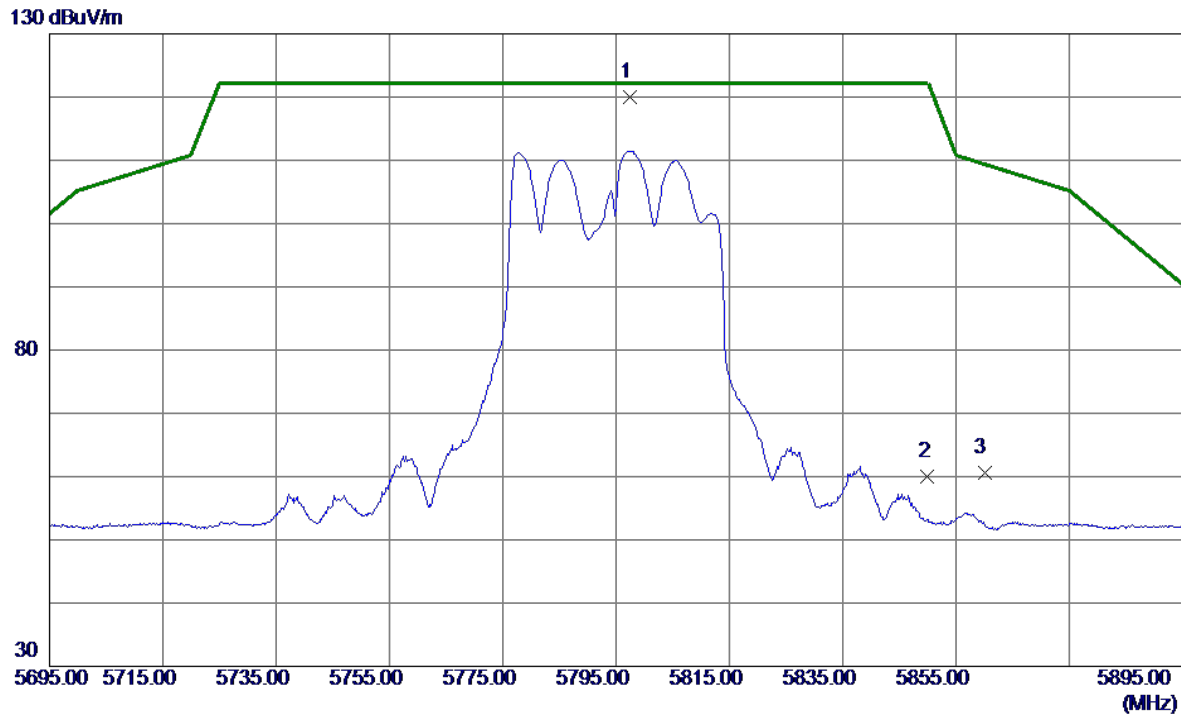


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5797.4000	104.69	15.23	119.92	122.20	-2.28	Peak	No Limit
2	5850.0000	44.63	15.39	60.02	122.20	-62.18	Peak	
3	5860.0000	45.18	15.43	60.61	109.40	-48.79	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

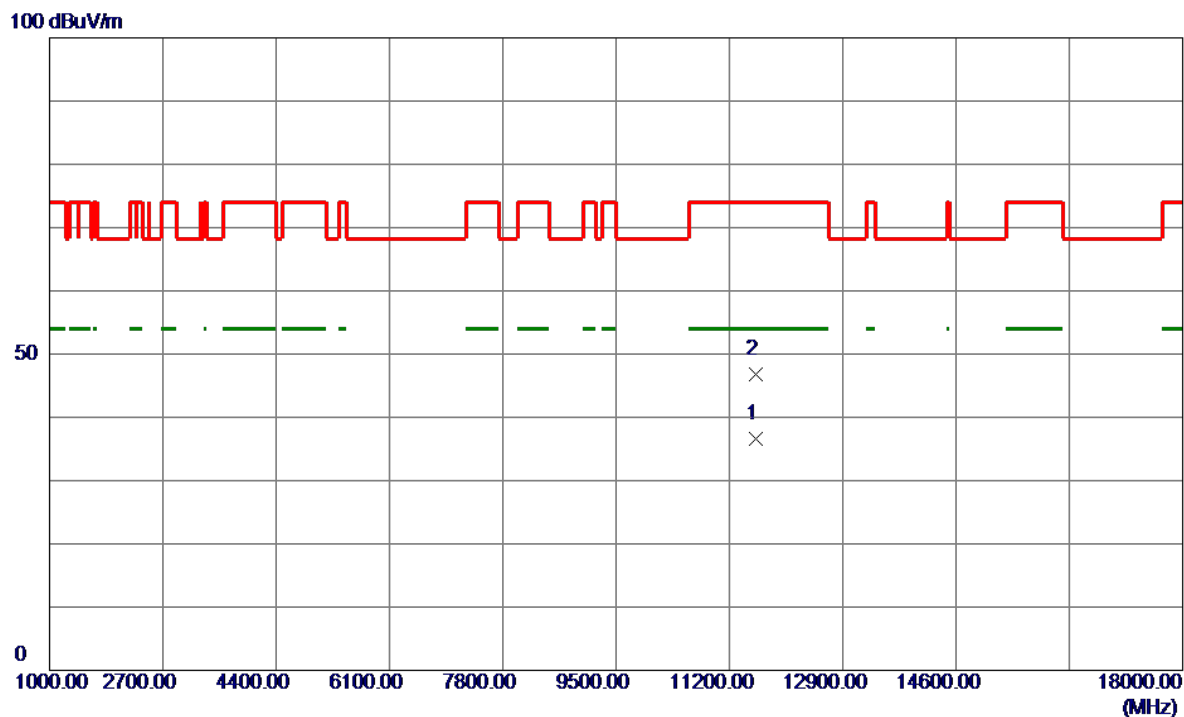


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11596.0250	26.90	9.66	36.56	54.00	-17.44	AVG	
2	11596.6250	37.21	9.66	46.87	74.00	-27.13	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

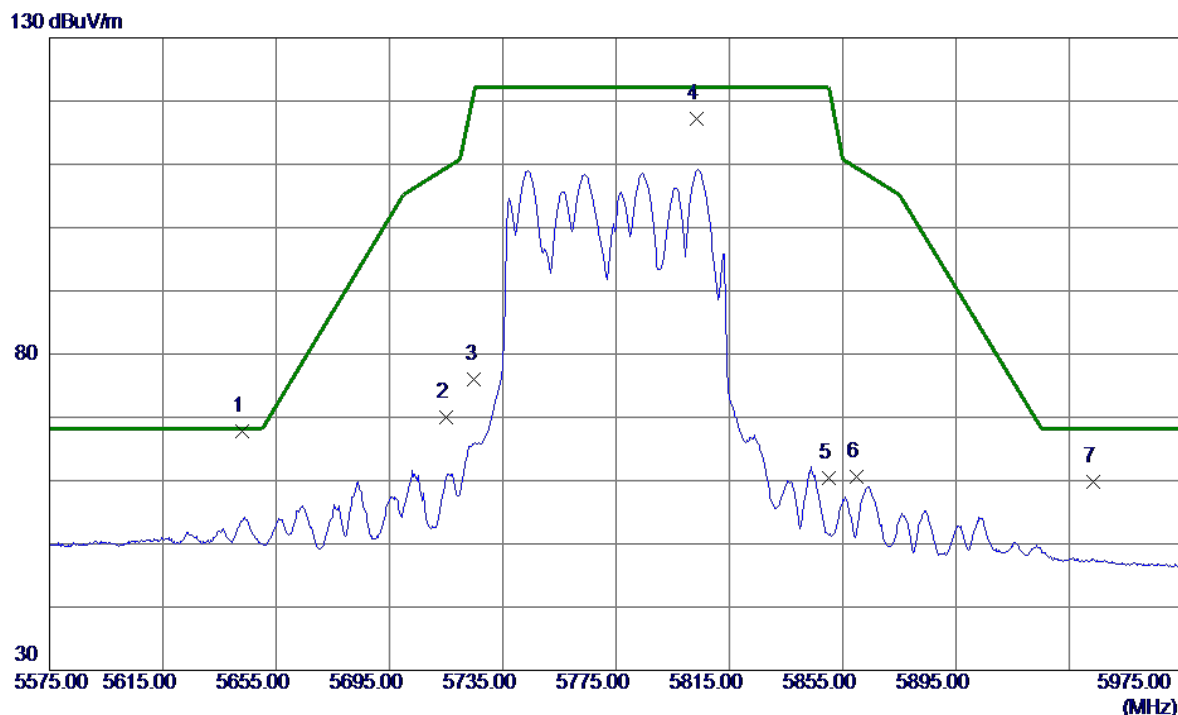


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5643.2000	53.12	14.74	67.86	68.20	-0.34	Peak	
2	5715.0000	55.05	14.97	70.02	109.40	-39.38	Peak	
3	5725.0000	61.05	15.00	76.05	122.20	-46.15	Peak	
4	5803.4000	101.87	15.25	117.12	122.20	-5.08	Peak	No Limit
5	5850.0000	45.06	15.39	60.45	122.20	-61.75	Peak	
6	5860.0000	45.18	15.43	60.61	109.40	-48.79	Peak	
7	5943.4000	44.17	15.69	59.86	68.20	-8.34	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

100 dBuV/m

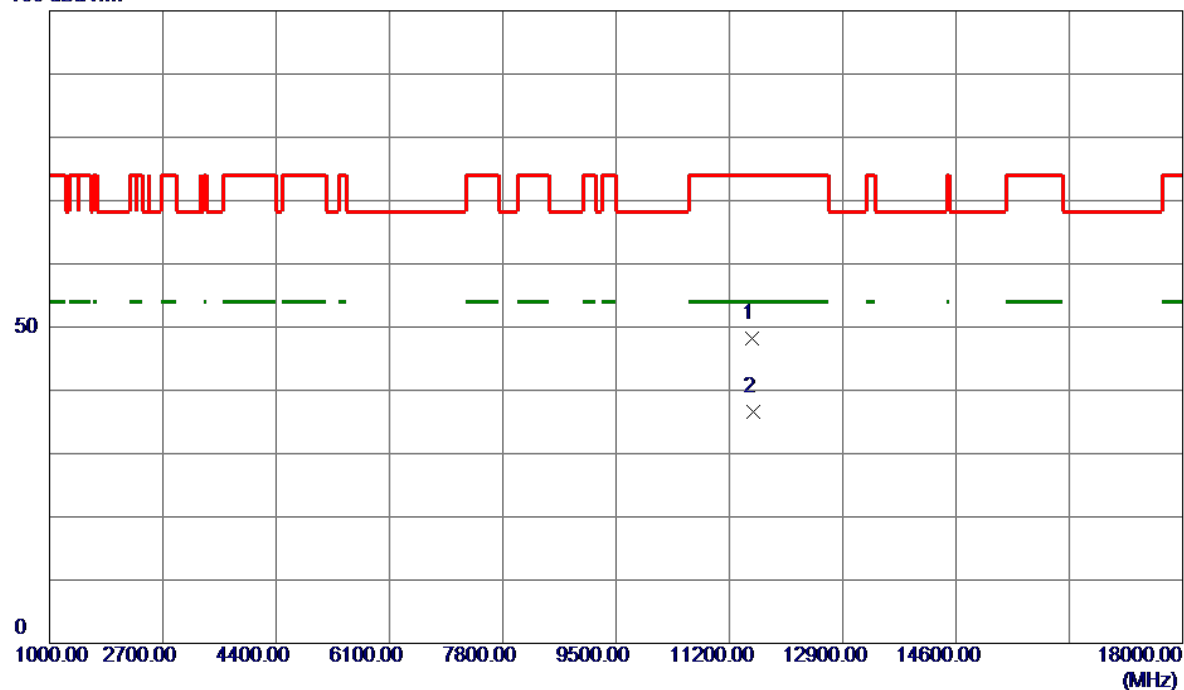


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11548.8200	38.48	9.67	48.15	74.00	-25.85	Peak	
2 *	11550.1650	26.99	9.67	36.66	54.00	-17.34	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5745 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

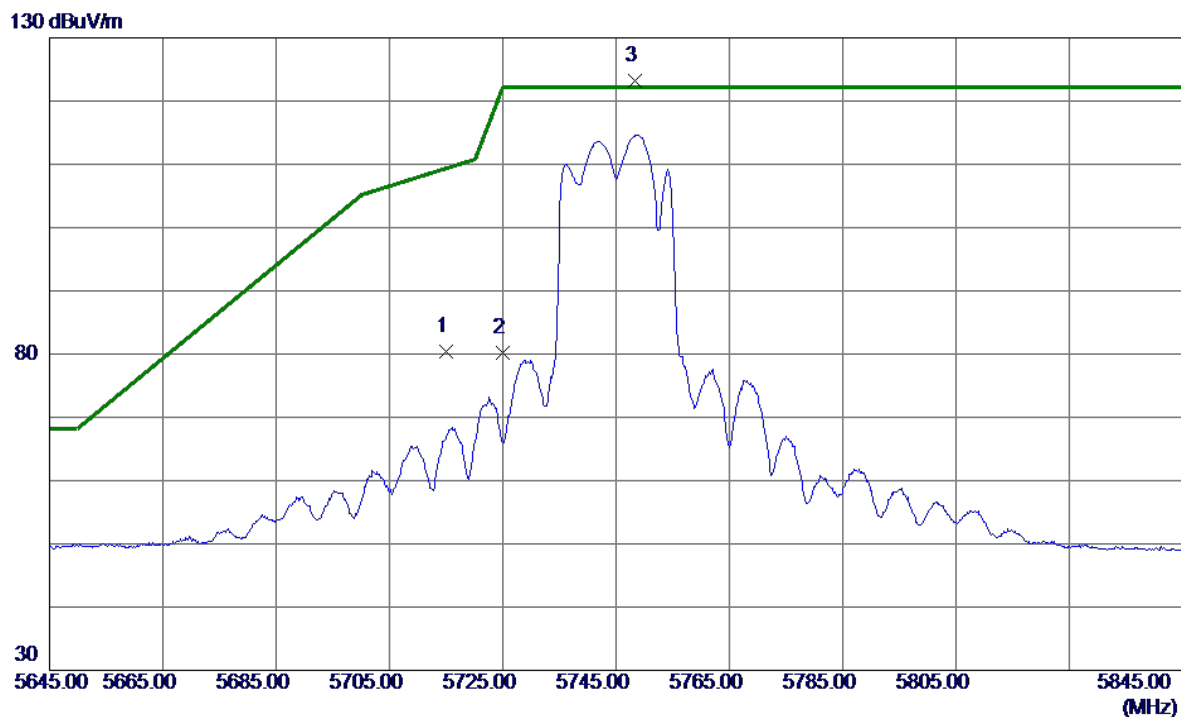


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	65.49	14.97	80.46	109.40	-28.94	Peak	
2	5725.0000	65.16	15.00	80.16	122.20	-42.04	Peak	
3 *	5748.4000	108.20	15.07	123.27	122.20	1.07	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5745 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

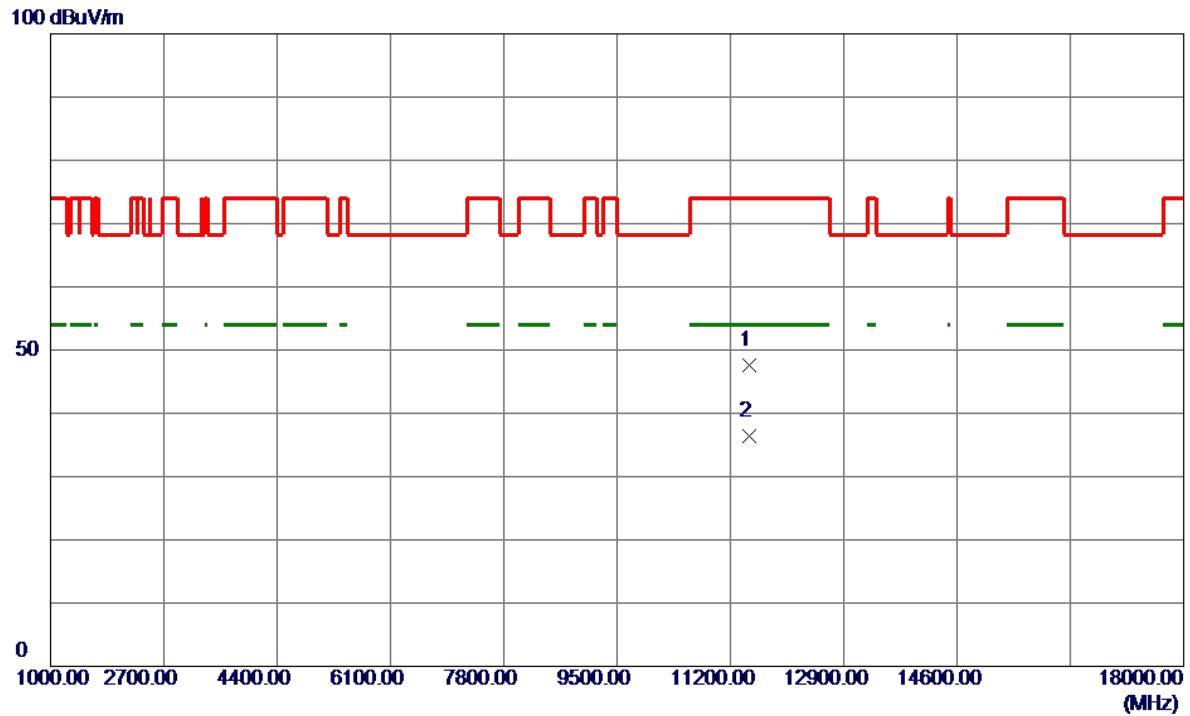


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11487.8550	37.94	9.66	47.60	74.00	-26.40	Peak	
2 *	11489.9650	26.74	9.67	36.41	54.00	-17.59	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5785 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

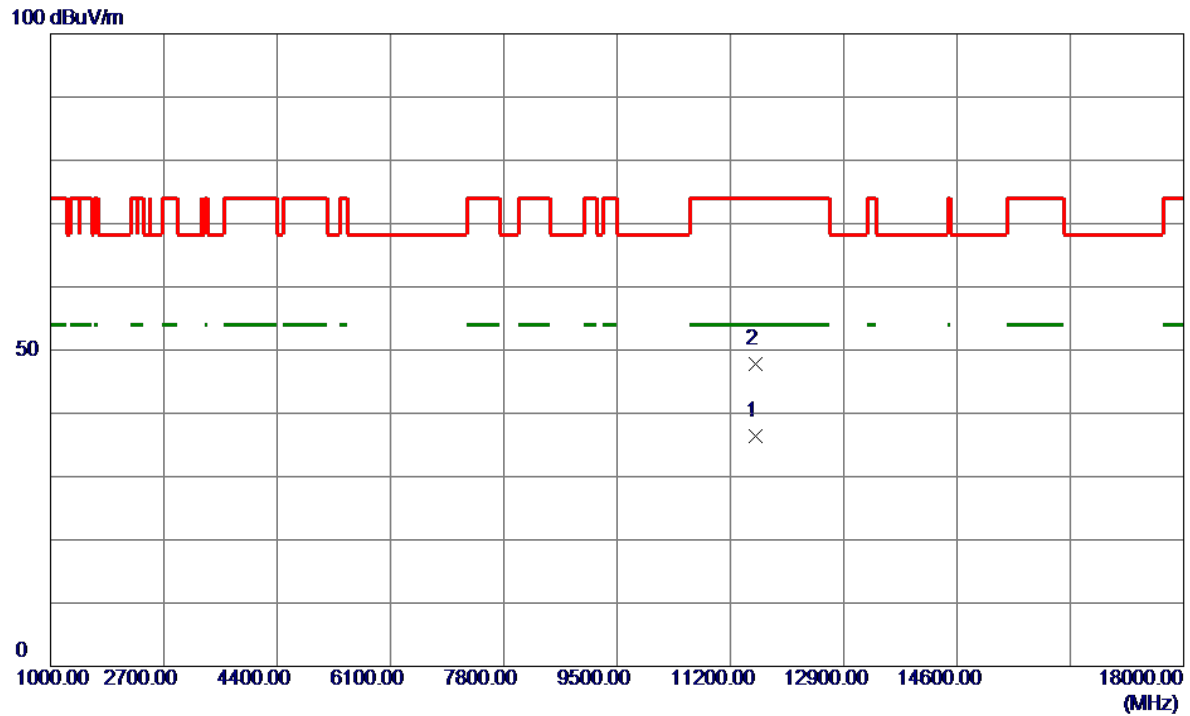


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11568.3400	26.83	9.66	36.49	54.00	-17.51	AVG	
2	11568.5350	38.22	9.66	47.88	74.00	-26.12	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

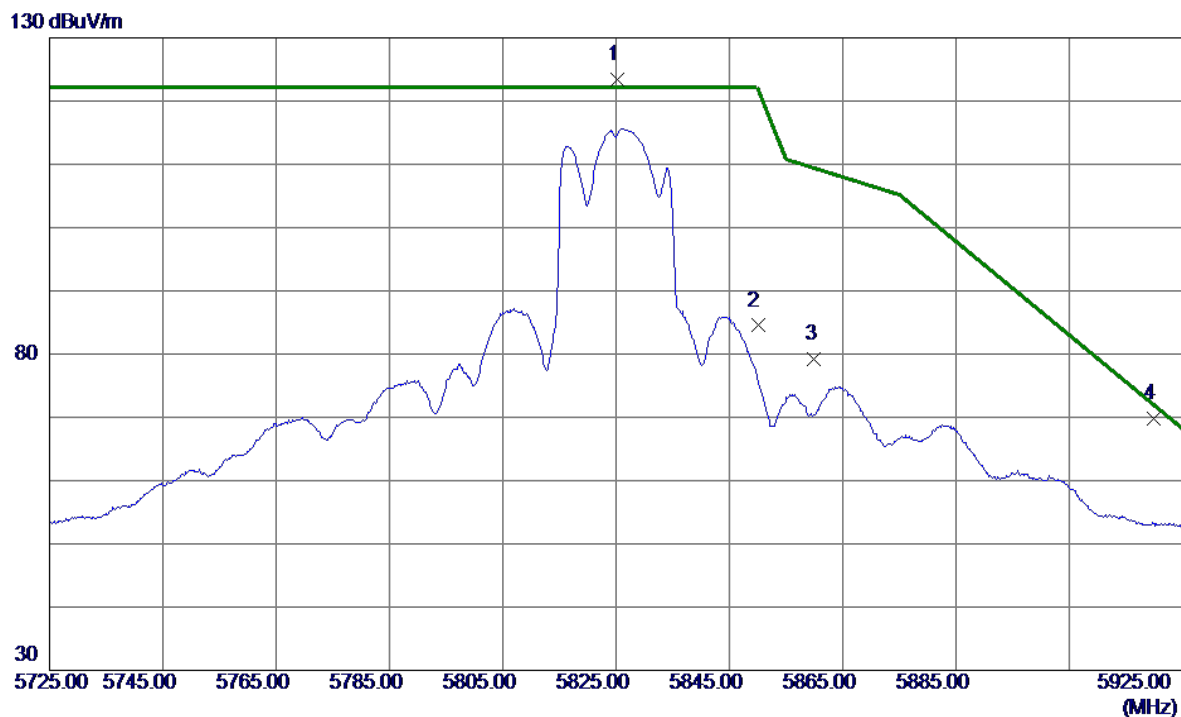


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5825.3000	108.01	15.32	123.33	122.20	1.13	Peak	No Limit
2	5850.0000	69.11	15.39	84.50	122.20	-37.70	Peak	
3	5860.0000	63.82	15.43	79.25	109.40	-30.15	Peak	
4	5919.9000	54.22	15.62	69.84	71.97	-2.13	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

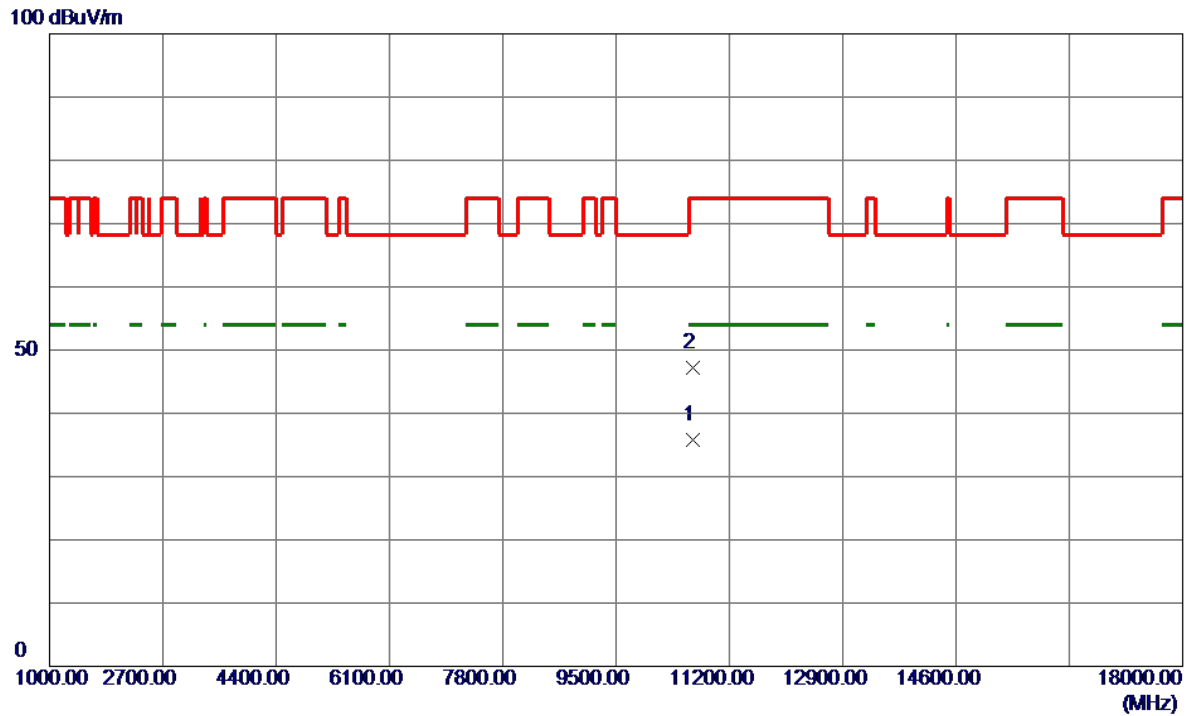


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10647.9650	26.60	9.28	35.88	54.00	-18.12	AVG	
2	10650.9620	37.91	9.28	47.19	74.00	-26.81	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5755 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

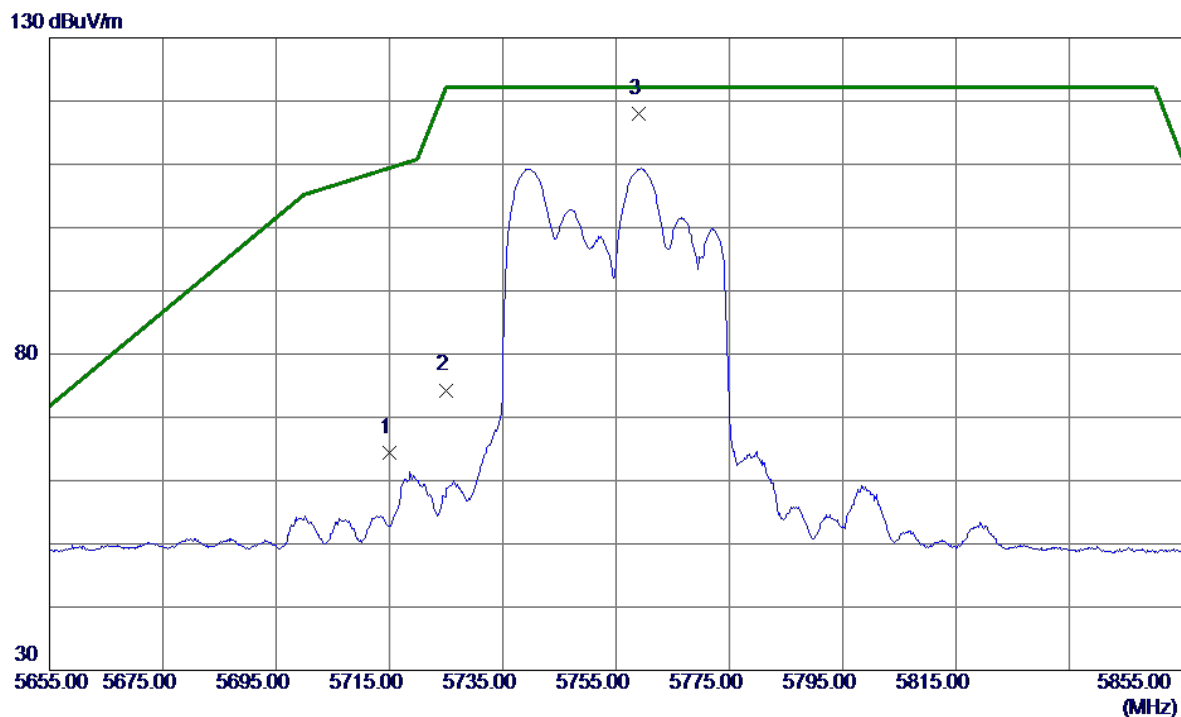


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	49.46	14.97	64.43	109.40	-44.97	Peak	
2	5725.0000	59.30	15.00	74.30	122.20	-47.90	Peak	
3 *	5758.9000	102.99	15.11	118.10	122.20	-4.10	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5755 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

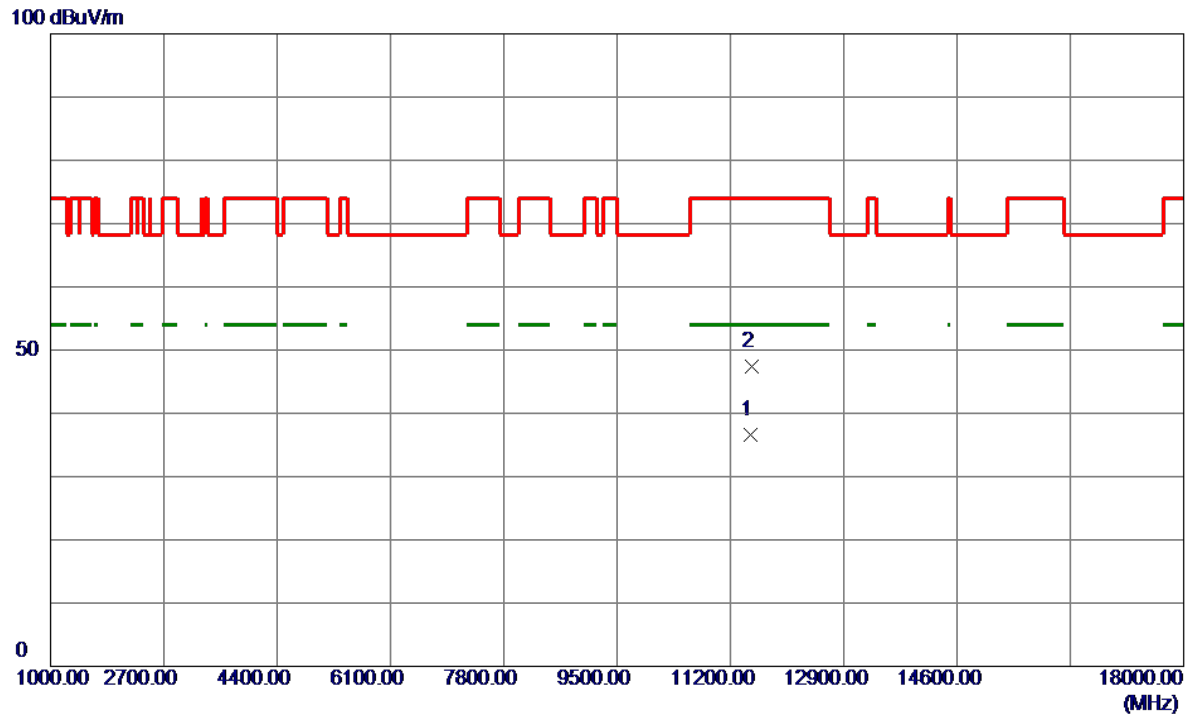


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11508.5000	26.89	9.67	36.56	54.00	-17.44	AVG	
2	11515.0300	37.71	9.67	47.38	74.00	-26.62	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5795 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

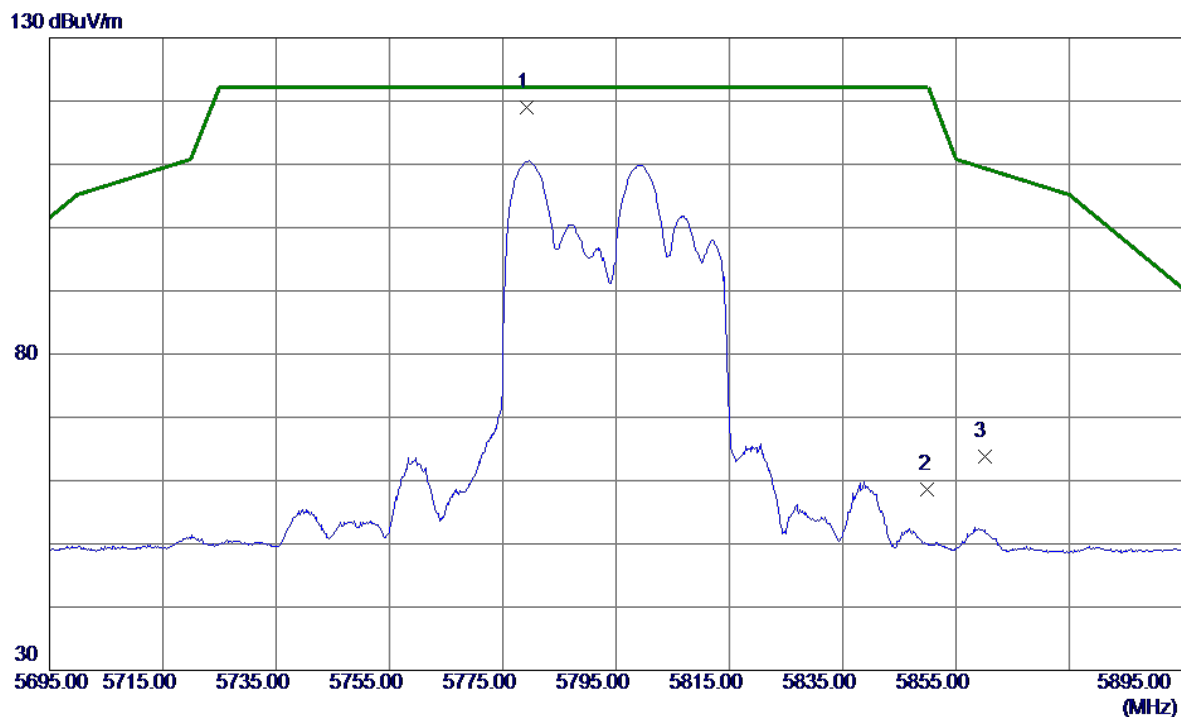


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5779.2000	103.83	15.17	119.00	122.20	-3.20	Peak	No Limit
2	5850.0000	43.30	15.39	58.69	122.20	-63.51	Peak	
3	5860.0000	48.33	15.43	63.76	109.40	-45.64	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5795 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

100 dBuV/m

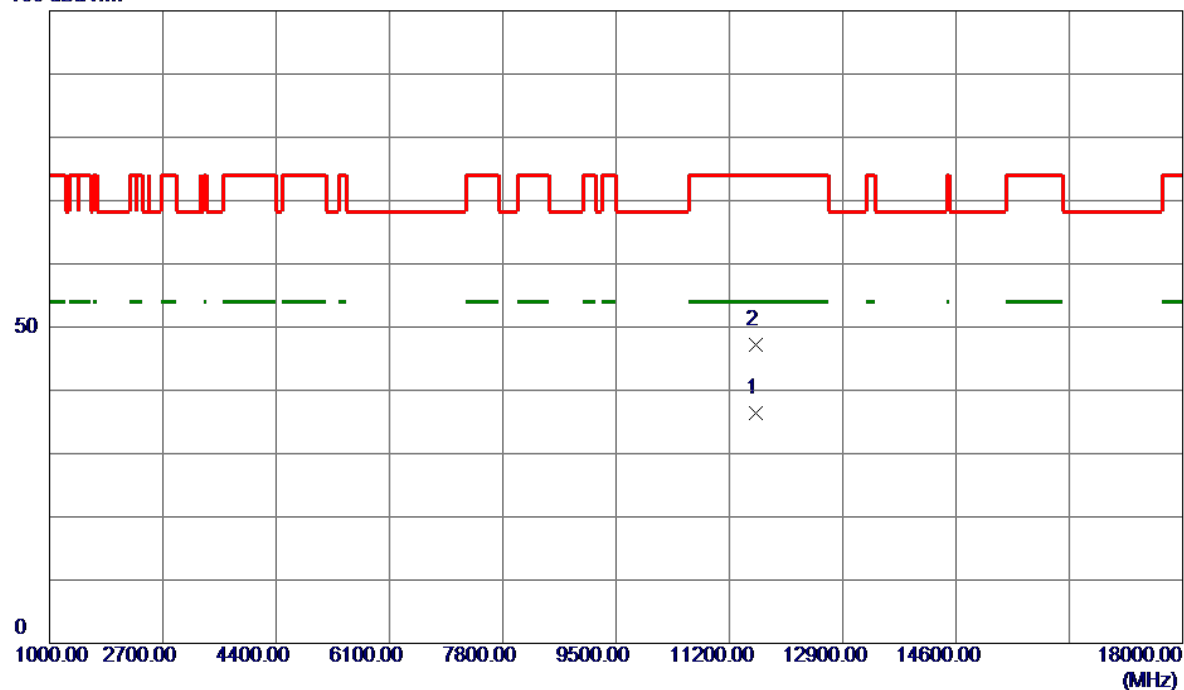


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11590.4600	26.78	9.66	36.44	54.00	-17.56	AVG	
2	11592.9550	37.54	9.66	47.20	74.00	-26.80	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE80) Mode 5775 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

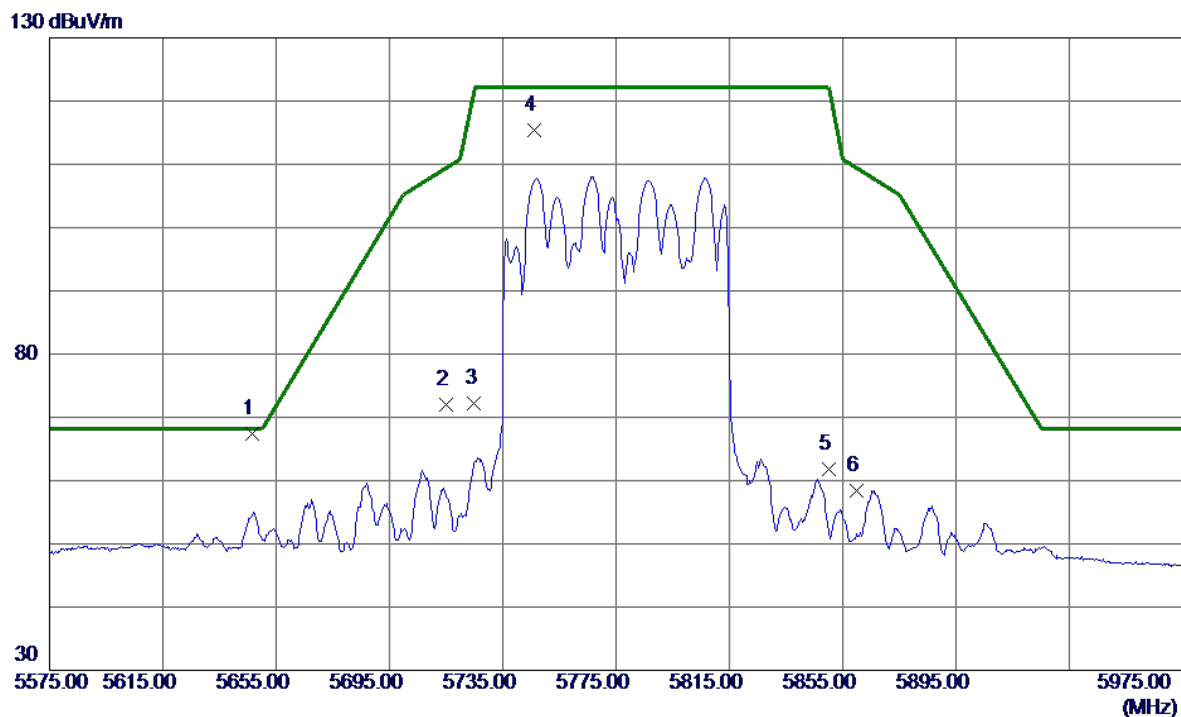


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5646.4000	52.74	14.75	67.49	68.20	-0.71	Peak	
2	5715.0000	57.09	14.97	72.06	109.40	-37.34	Peak	
3	5725.0000	57.25	15.00	72.25	122.20	-49.95	Peak	
4	5746.2000	100.41	15.07	115.48	122.20	-6.72	Peak	No Limit
5	5850.0000	46.46	15.39	61.85	122.20	-60.35	Peak	
6	5860.0000	42.91	15.43	58.34	109.40	-51.06	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE80) Mode 5775 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

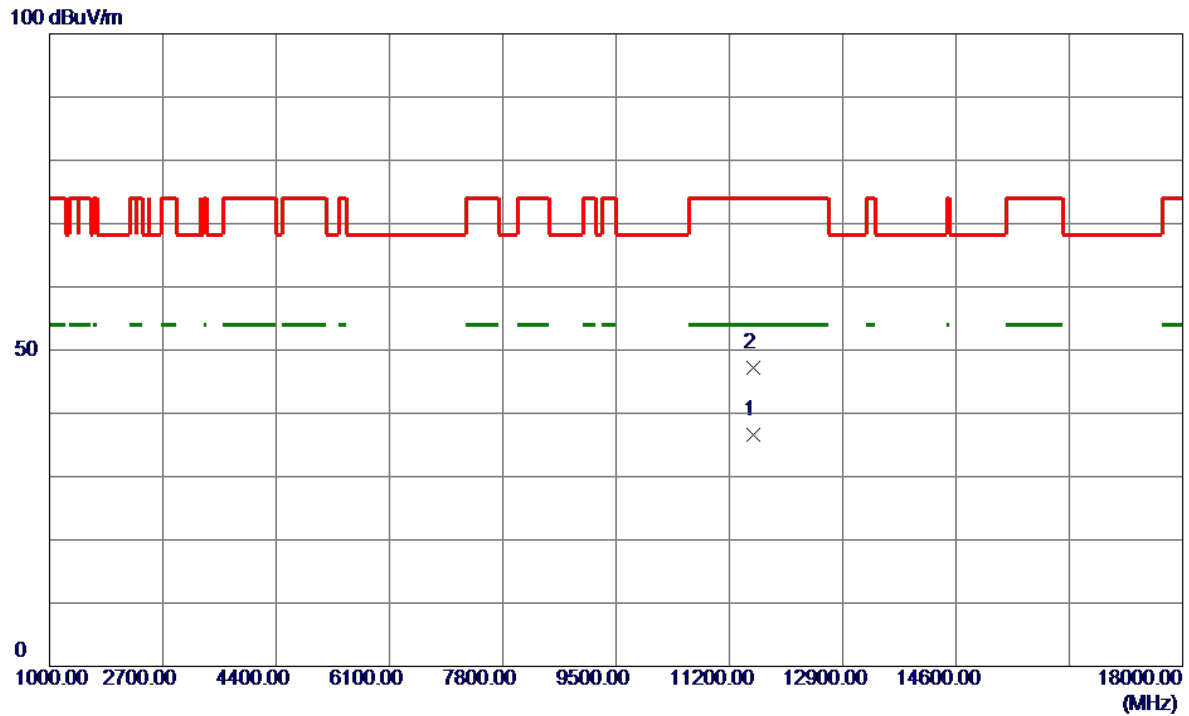


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11553.9000	26.90	9.67	36.57	54.00	-17.43	AVG	
2	11557.6250	37.51	9.67	47.18	74.00	-26.82	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

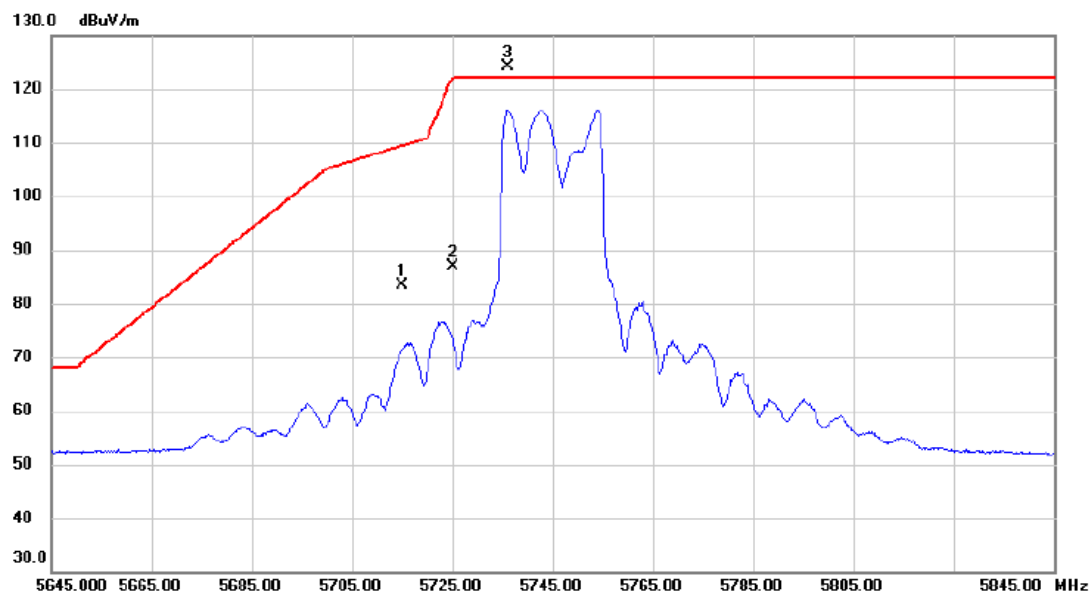


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	68.43	14.97	83.40	109.40	-26.00	peak	
2		5725.000	71.85	15.00	86.85	122.20	-35.35	peak	
3	*	5736.000	109.04	15.03	124.07	122.20	1.87	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5785 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

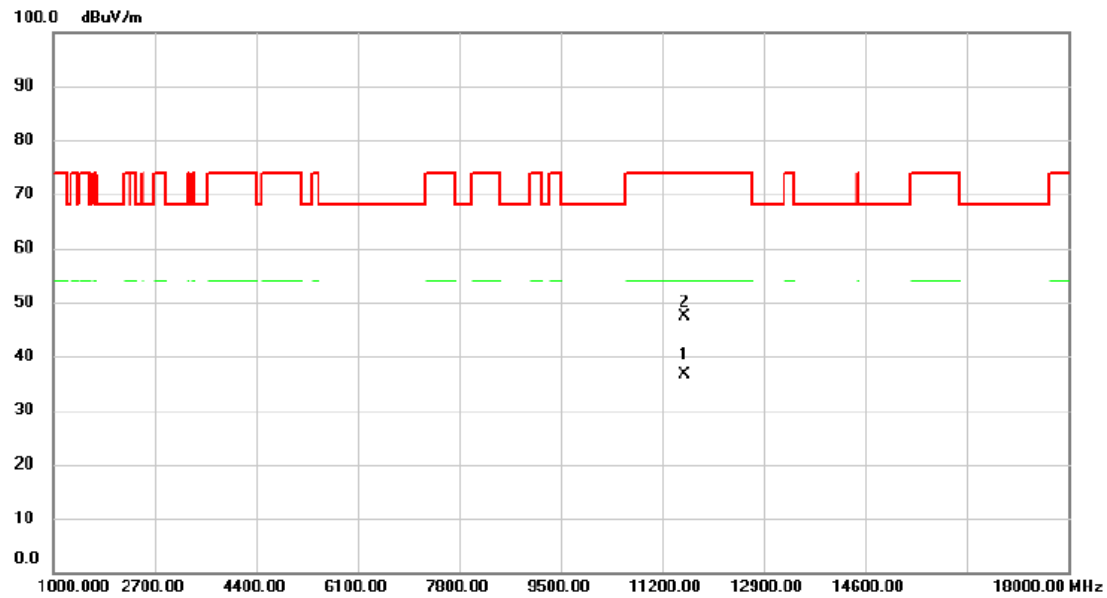


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11575.450	27.05	9.67	36.72	54.00	-17.28	AVG	
2		11577.340	37.72	9.66	47.38	74.00	-26.62	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

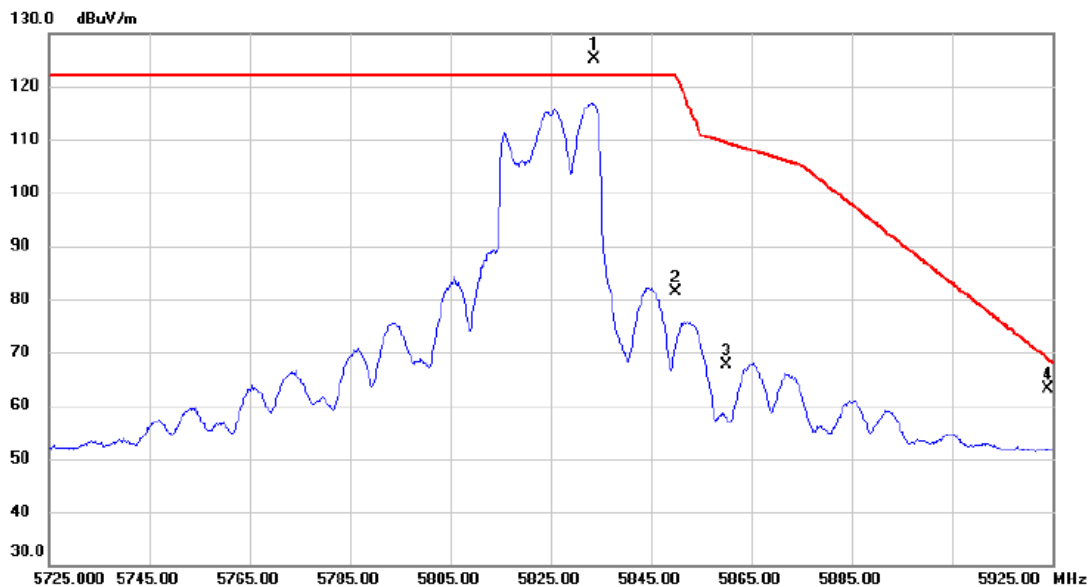


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5833.600	109.75	15.34	125.09	122.20	2.89	peak	No Limit
2		5850.000	66.00	15.39	81.39	122.20	-40.81	peak	
3		5860.000	52.10	15.42	67.52	109.40	-41.88	peak	
4		5924.000	47.42	15.63	63.05	68.94	-5.89	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

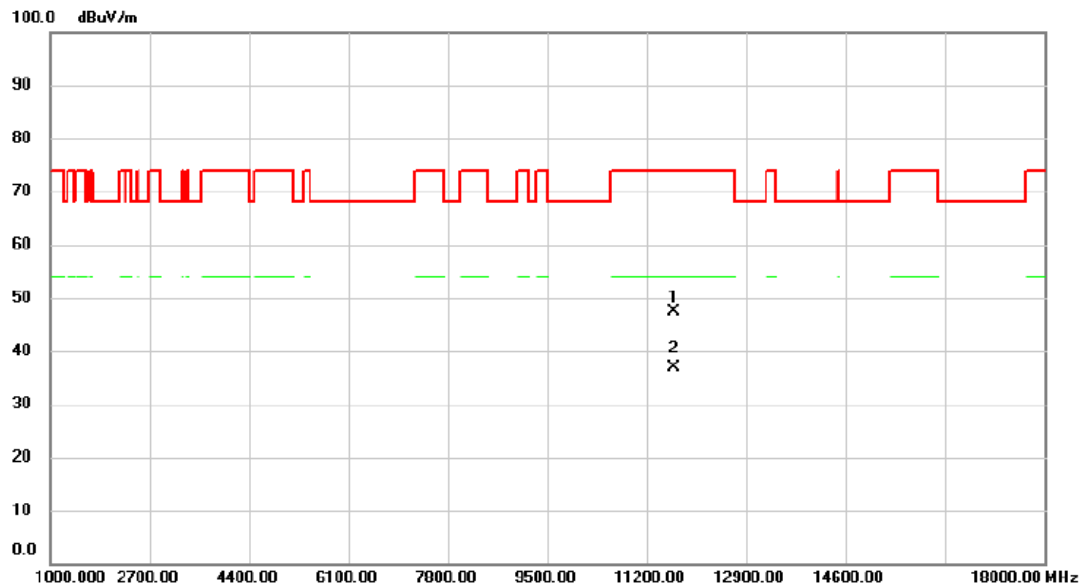


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11658.415	37.65	9.66	47.31	74.00	-26.69	peak	
2	*	11660.980	27.15	9.66	36.81	54.00	-17.19	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

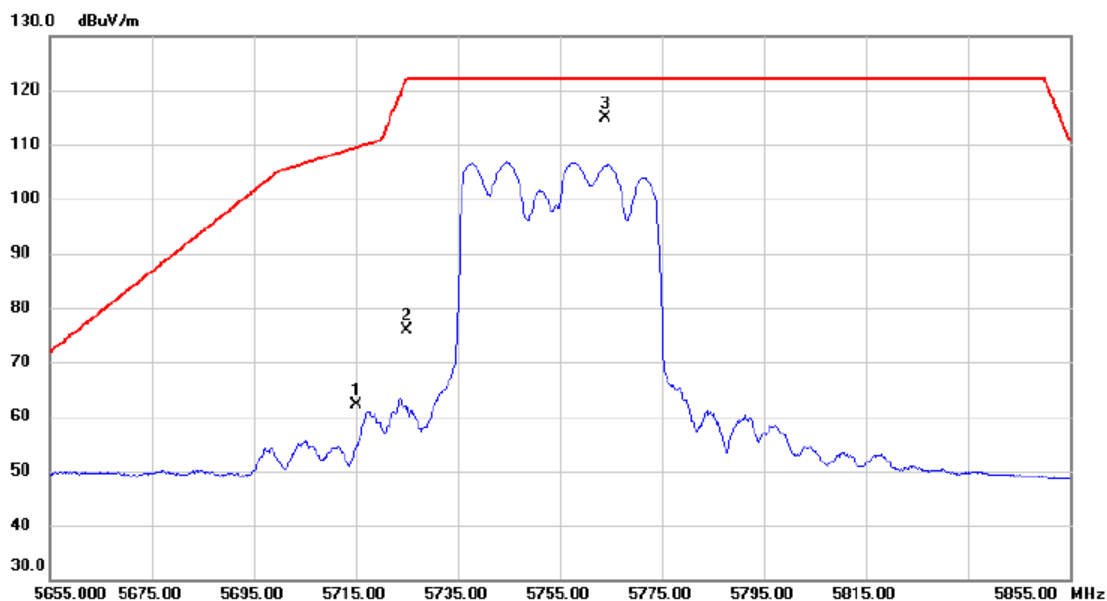


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	47.15	14.97	62.12	109.40	-47.28	peak	
2		5725.000	60.83	15.00	75.83	122.20	-46.37	peak	
3	*	5763.900	99.86	15.12	114.98	122.20	-7.22	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

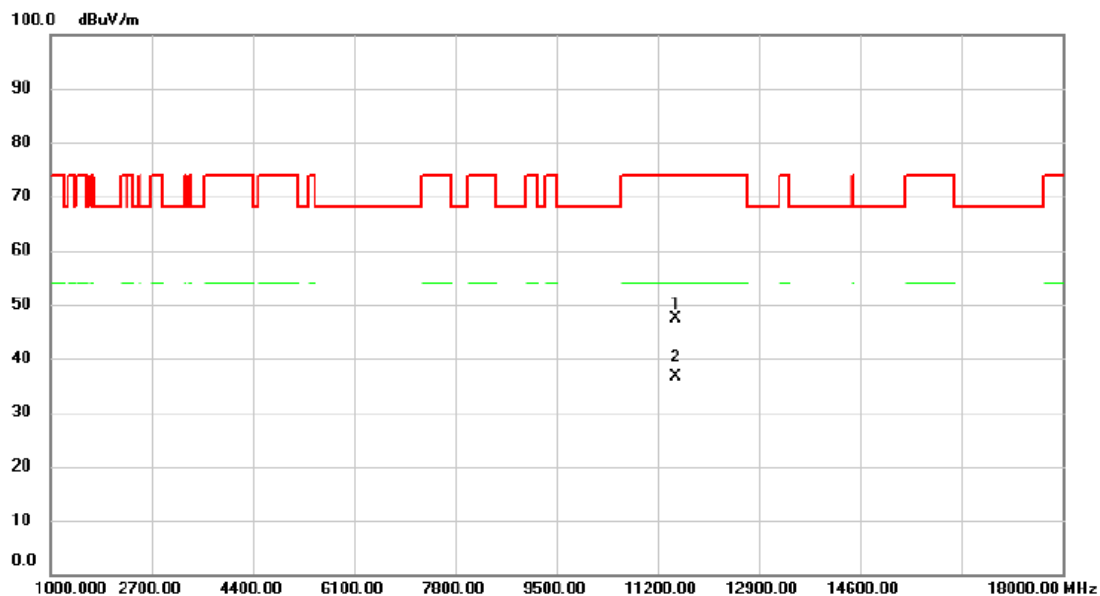


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11508.710	37.74	9.68	47.42	74.00	-26.58	peak	
2	*	11508.860	26.83	9.68	36.51	54.00	-17.49	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

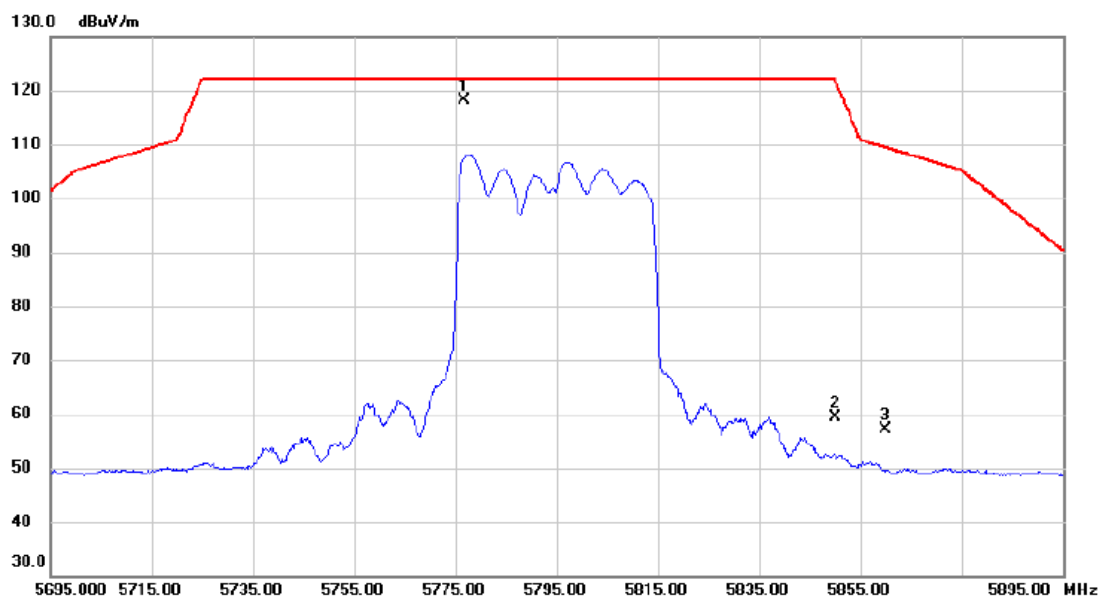


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5776.700	102.86	15.16	118.02	122.20	-4.18	peak	No Limit
2		5850.000	44.08	15.39	59.47	122.20	-62.73	peak	
3		5860.000	41.80	15.42	57.22	109.40	-52.18	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

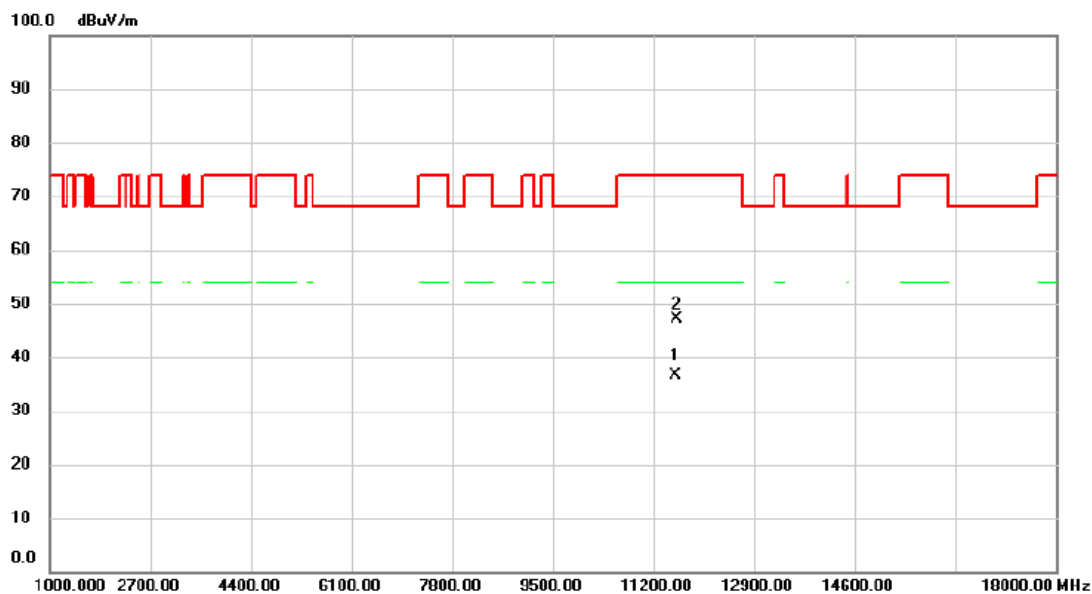


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11581.780	26.96	9.66	36.62	54.00	-17.38	AVG	
2		11603.470	37.40	9.65	47.05	74.00	-26.95	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

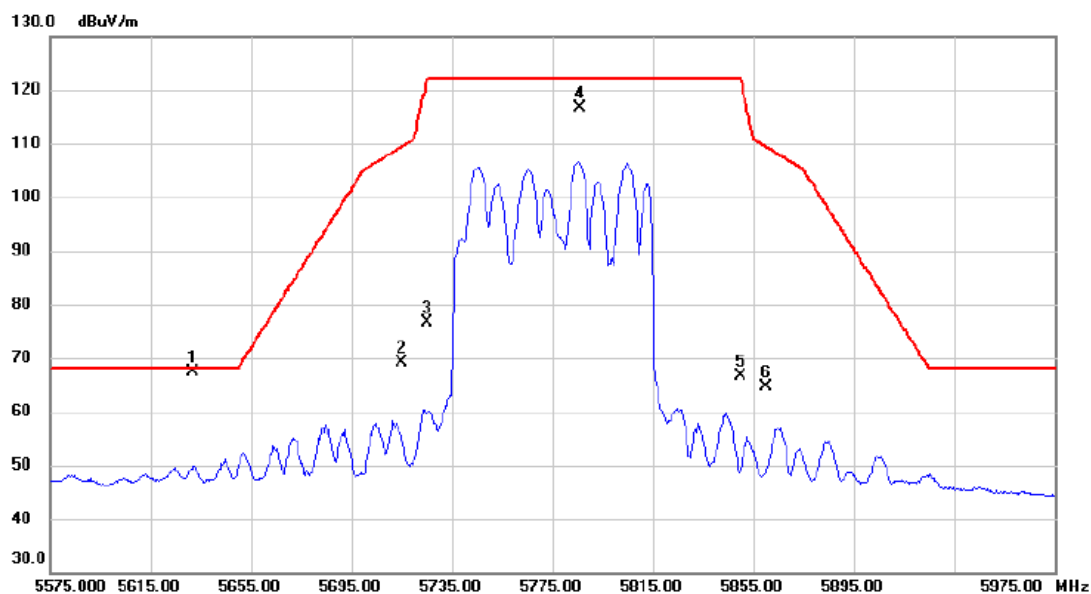


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5632.000	52.79	14.70	67.49	68.20	-0.71	peak	
2		5715.000	54.20	14.97	69.17	109.40	-40.23	peak	
3		5725.000	61.58	15.00	76.58	122.20	-45.62	peak	
4		5785.800	101.45	15.19	116.64	122.20	-5.56	peak	No Limit
5		5850.000	51.24	15.39	66.63	122.20	-55.57	peak	
6		5860.000	49.26	15.42	64.68	109.40	-44.72	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

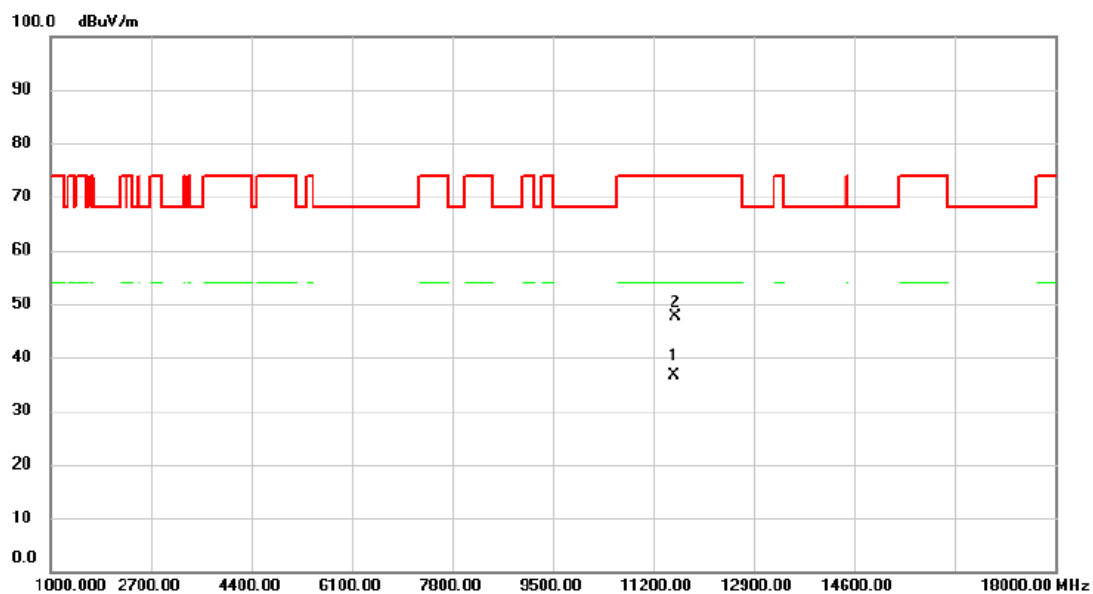


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11547.875	27.04	9.67	36.71	54.00	-17.29	AVG	
2		11562.775	37.94	9.66	47.60	74.00	-26.40	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Straddle Channel:

Test Mode	UNII-2C_TX A Mode 5720 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

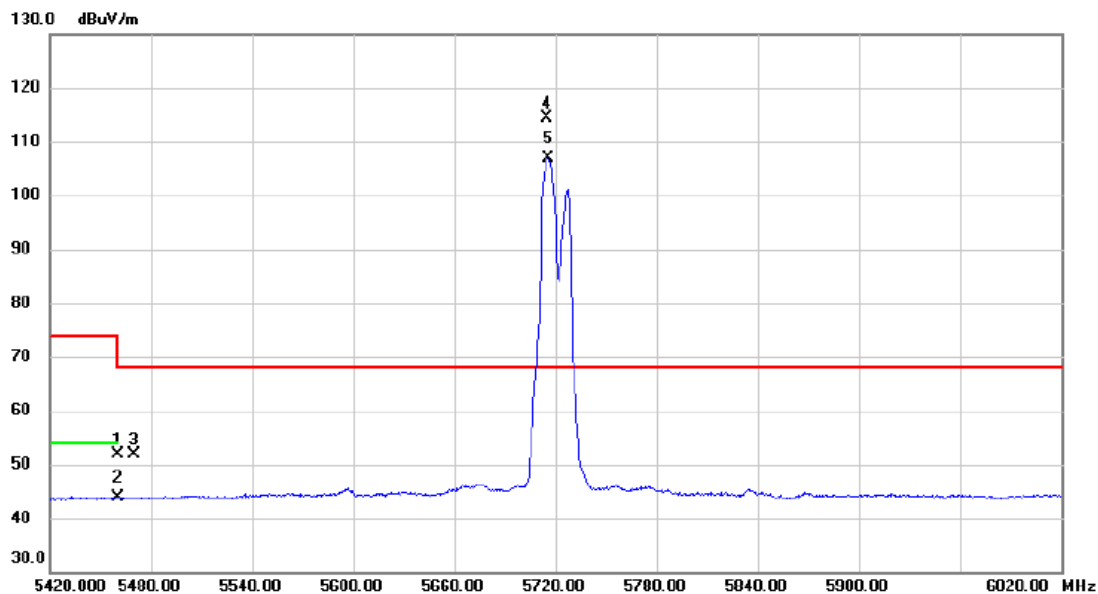


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	37.72	14.21	51.93	74.00	-22.07	peak	
2		5460.000	29.63	14.21	43.84	54.00	-10.16	AVG	
3		5470.000	37.65	14.22	51.87	68.20	-16.33	peak	
4	*	5715.200	99.42	14.97	114.39	68.20	46.19	peak	No Limit
5	X	5715.500	91.91	14.97	106.88	68.20	38.68	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5720 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

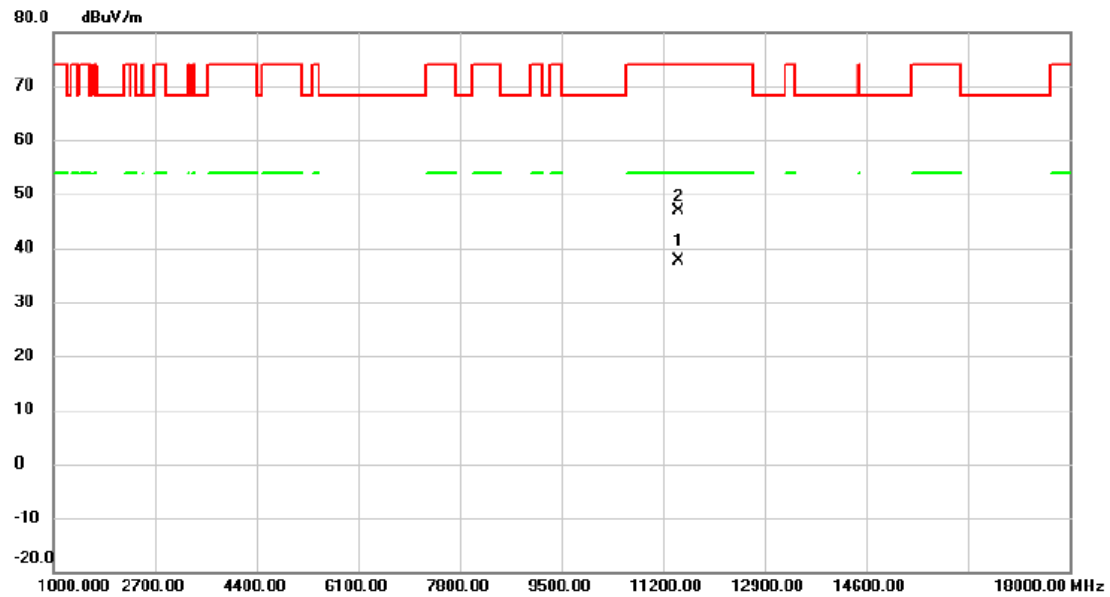


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11450.000	27.97	9.63	37.60	54.00	-16.40	AVG	
2		11457.900	37.32	9.64	46.96	74.00	-27.04	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5720 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

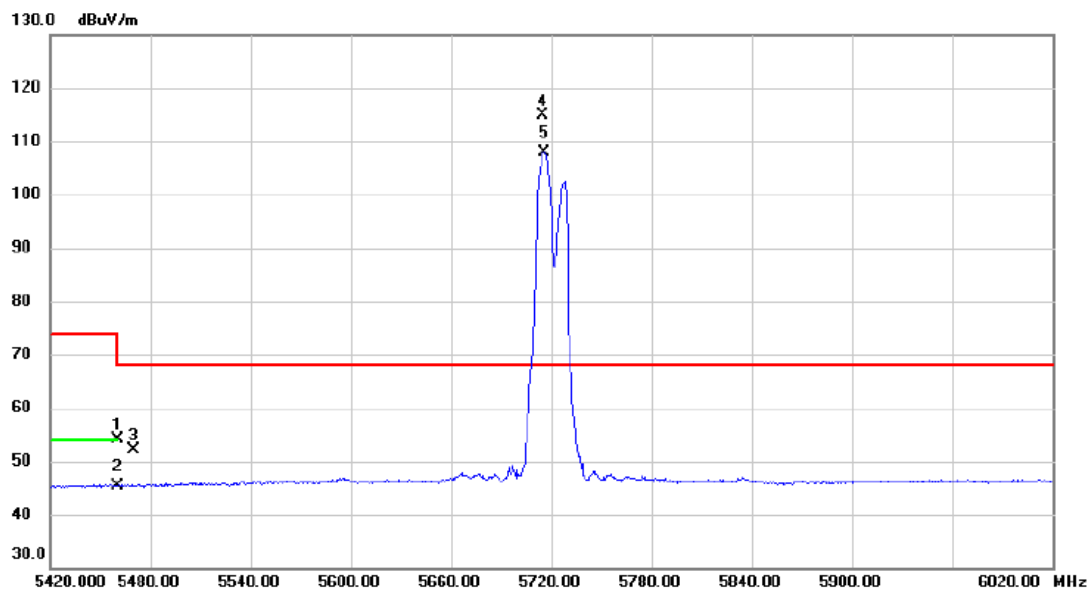


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	39.82	14.21	54.03	74.00	-19.97	peak	
2		5460.000	31.12	14.21	45.33	54.00	-8.67	AVG	
3		5470.000	37.99	14.22	52.21	68.20	-15.99	peak	
4	*	5714.900	99.87	14.97	114.84	68.20	46.64	peak	No Limit
5	X	5715.800	93.01	14.97	107.98	68.20	39.78	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5720 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

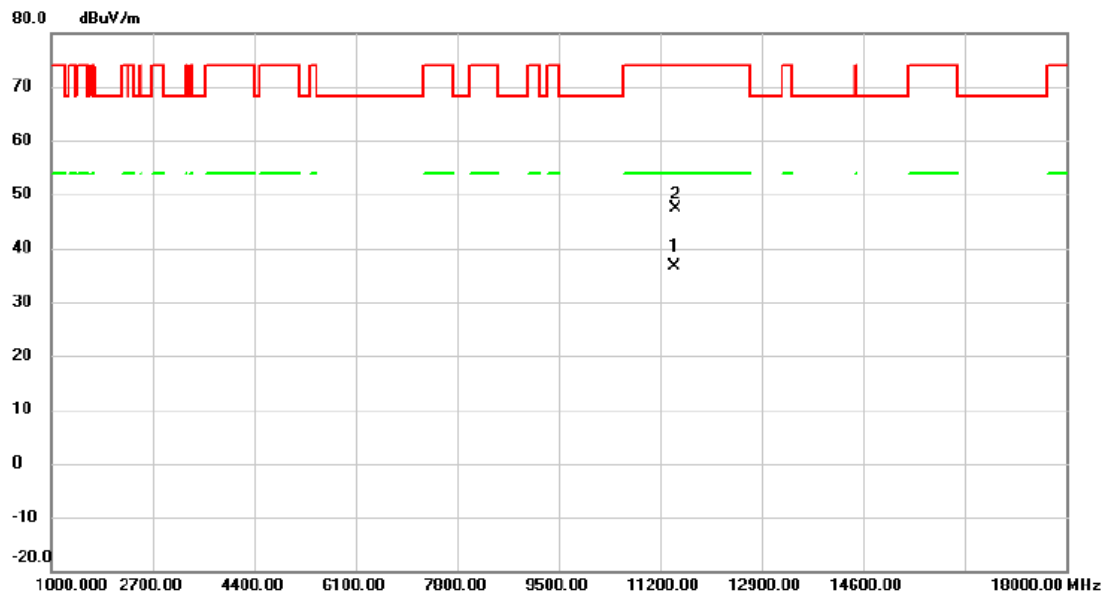


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11448.300	27.04	9.63	36.67	54.00	-17.33	AVG	
2		11460.175	37.83	9.64	47.47	74.00	-26.53	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5710 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

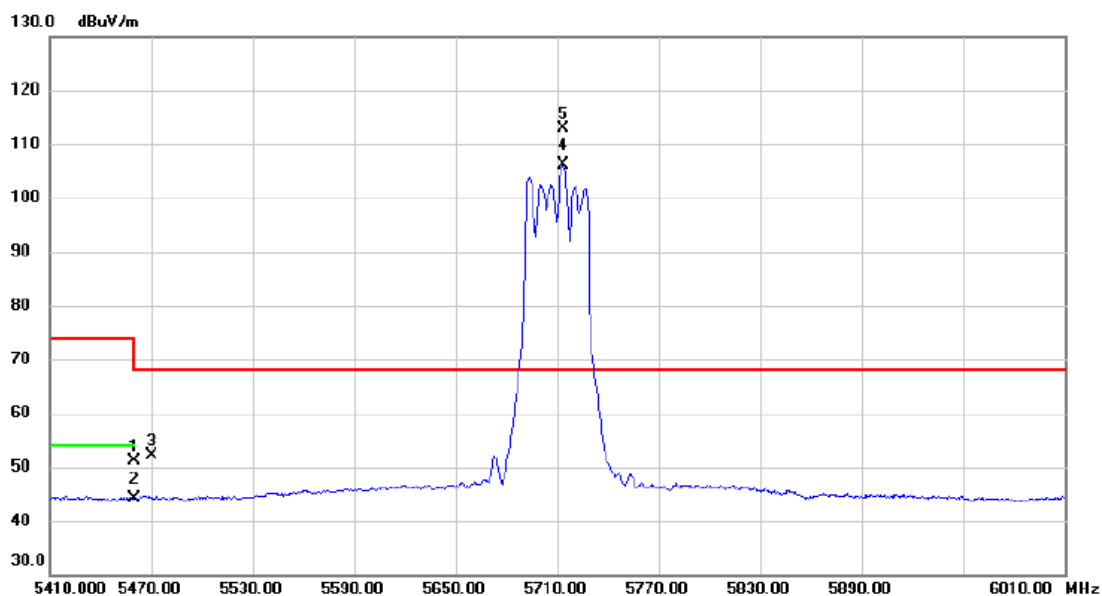


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	36.95	14.21	51.16	74.00	-22.84	peak	
2		5460.000	30.01	14.21	44.22	54.00	-9.78	AVG	
3		5470.000	37.90	14.22	52.12	68.20	-16.08	peak	
4	X	5713.300	91.08	14.96	106.04	68.20	37.84	AVG	No Limit
5	*	5713.900	97.85	14.96	112.81	68.20	44.61	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5710 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

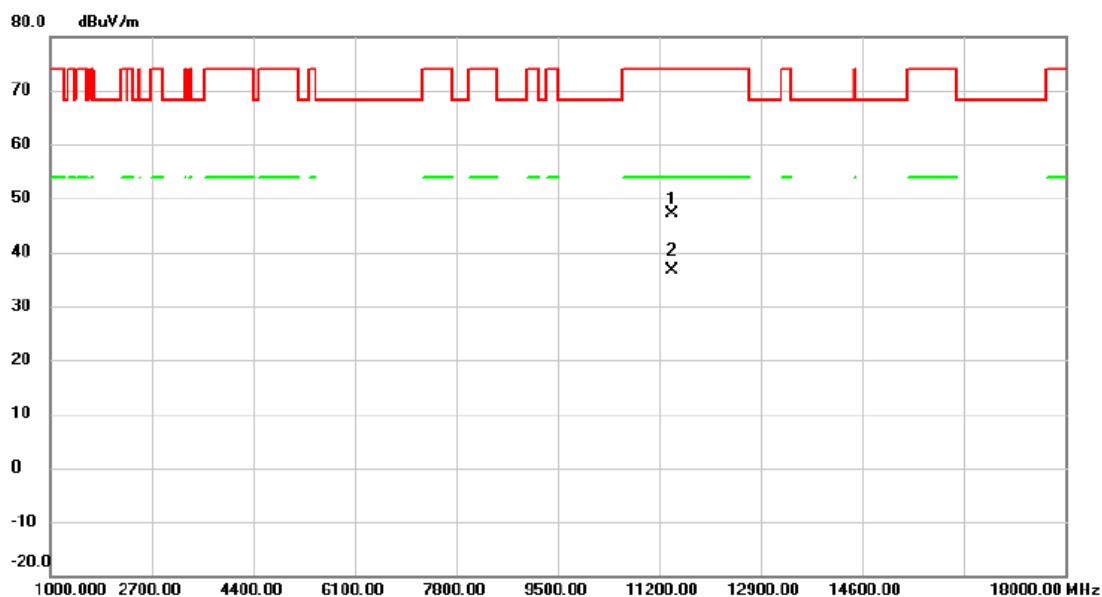


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11414.160	37.43	9.61	47.04	74.00	-26.96	peak	
2	*	11420.270	27.06	9.60	36.66	54.00	-17.34	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5690 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

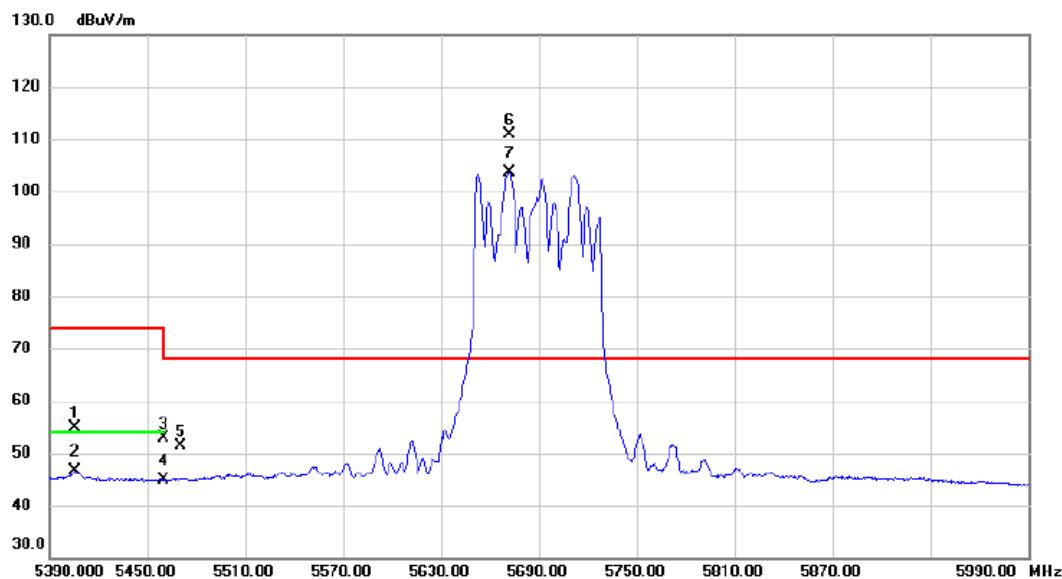


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5405.900	40.69	14.08	54.77	74.00	-19.23	peak	
2	5405.900	32.44	14.08	46.52	54.00	-7.48	AVG	
3	5460.000	38.56	14.21	52.77	74.00	-21.23	peak	
4	5460.000	30.63	14.21	44.84	54.00	-9.16	AVG	
5	5470.000	37.08	14.22	51.30	68.20	-16.90	peak	
6 *	5671.700	96.01	14.82	110.83	68.20	42.63	peak	No Limit
7 X	5671.700	88.87	14.82	103.69	68.20	35.49	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5690 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

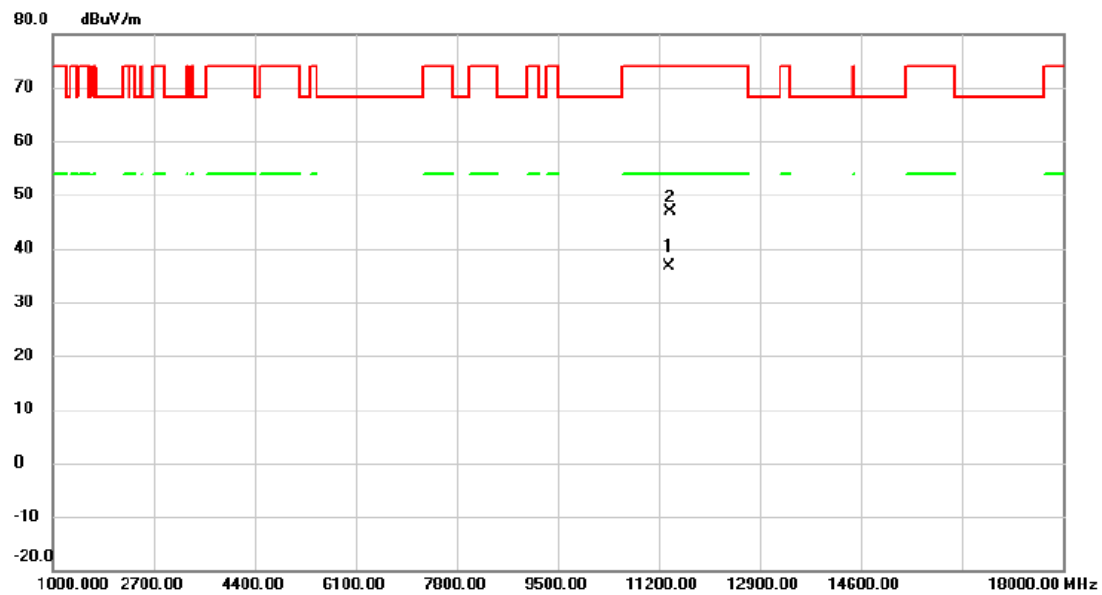


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11380.750	26.98	9.57	36.55	54.00	-17.45	AVG	
2		11383.550	37.38	9.58	46.96	74.00	-27.04	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5720 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

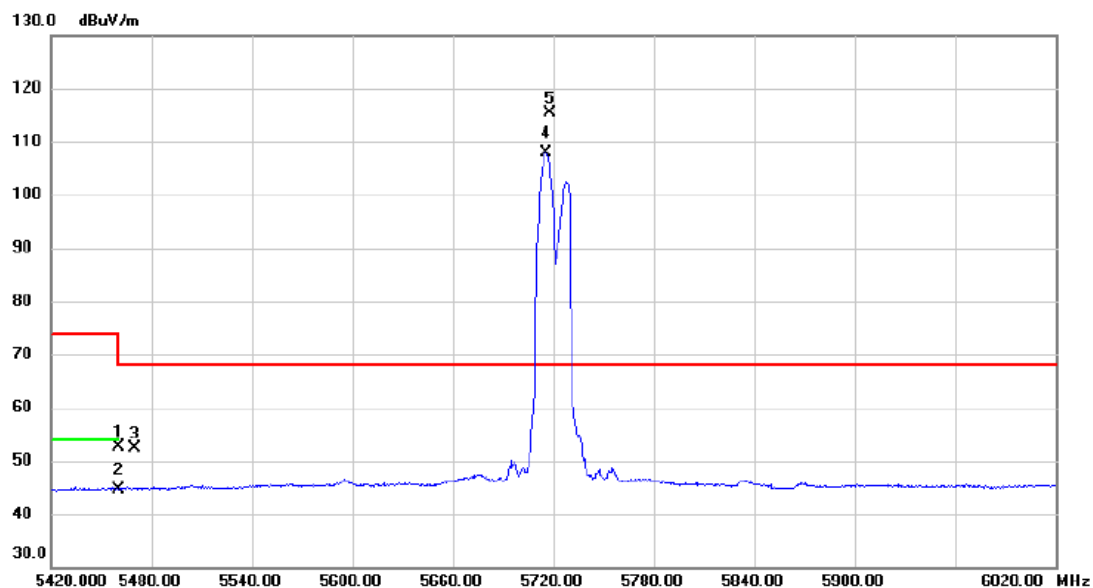


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	38.41	14.21	52.62	74.00	-21.38	peak	
2		5460.000	30.49	14.21	44.70	54.00	-9.30	AVG	
3		5470.000	38.07	14.22	52.29	68.20	-15.91	peak	
4	X	5715.800	93.02	14.97	107.99	68.20	39.79	AVG	No Limit
5	*	5717.900	100.28	14.98	115.26	68.20	47.06	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5720 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

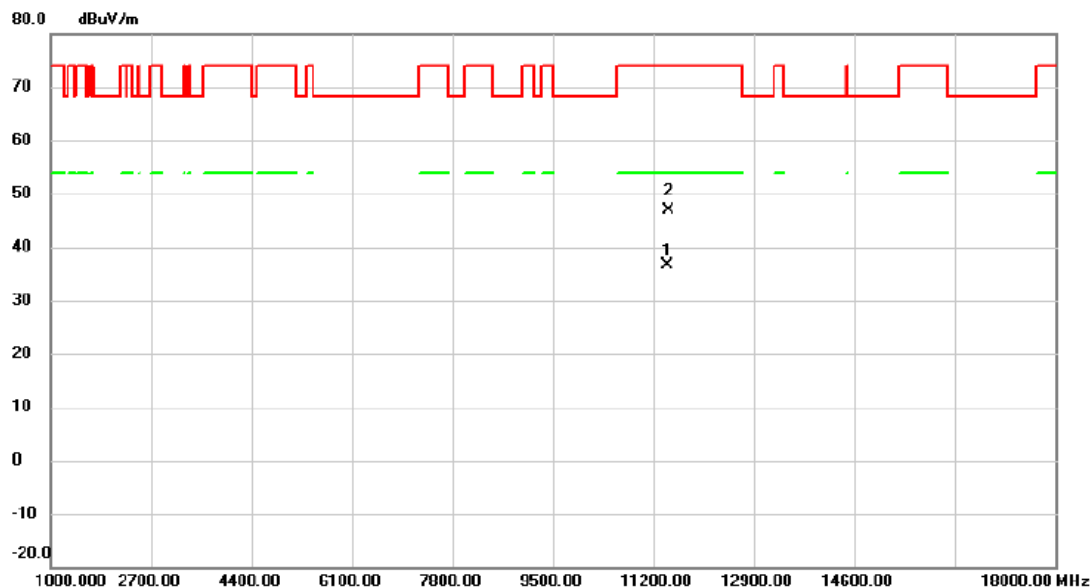


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11449.250	27.00	9.63	36.63	74.00	-37.37	peak	
2	*	11451.100	37.22	9.63	46.85	54.00	-7.15	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5710 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

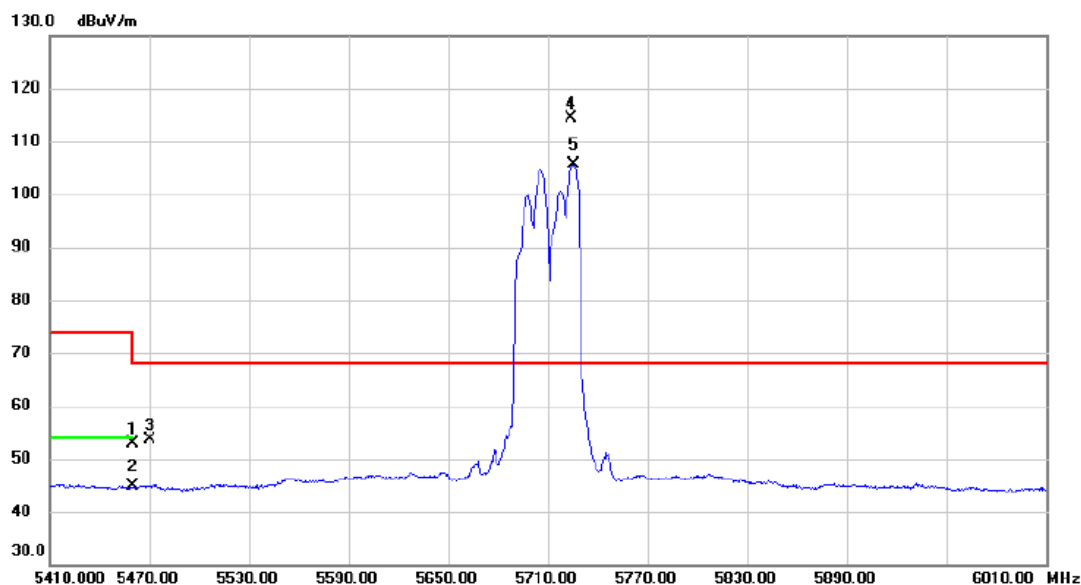


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	38.78	14.21	52.99	74.00	-21.01	peak	
2		5460.000	30.60	14.21	44.81	54.00	-9.19	AVG	
3		5470.000	39.46	14.22	53.68	68.20	-14.52	peak	
4	*	5724.400	99.41	15.00	114.41	68.20	46.21	peak	No Limit
5	X	5725.600	90.71	15.01	105.72	68.20	37.52	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5710 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

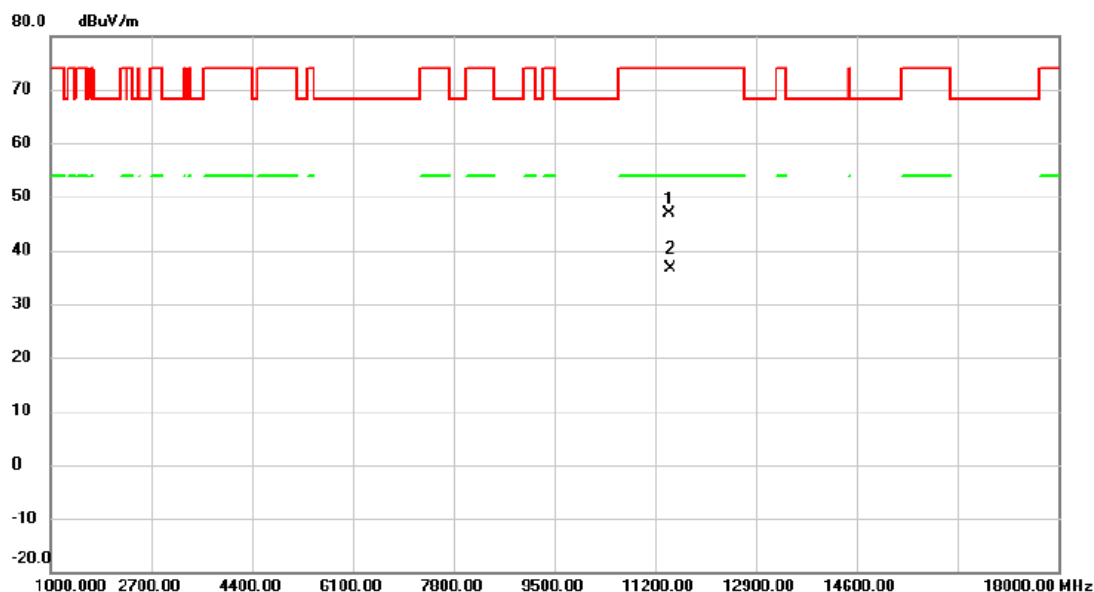


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11427.700	37.26	9.62	46.88	74.00	-27.12	peak	
2	*	11459.775	27.05	9.64	36.69	54.00	-17.31	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5690 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

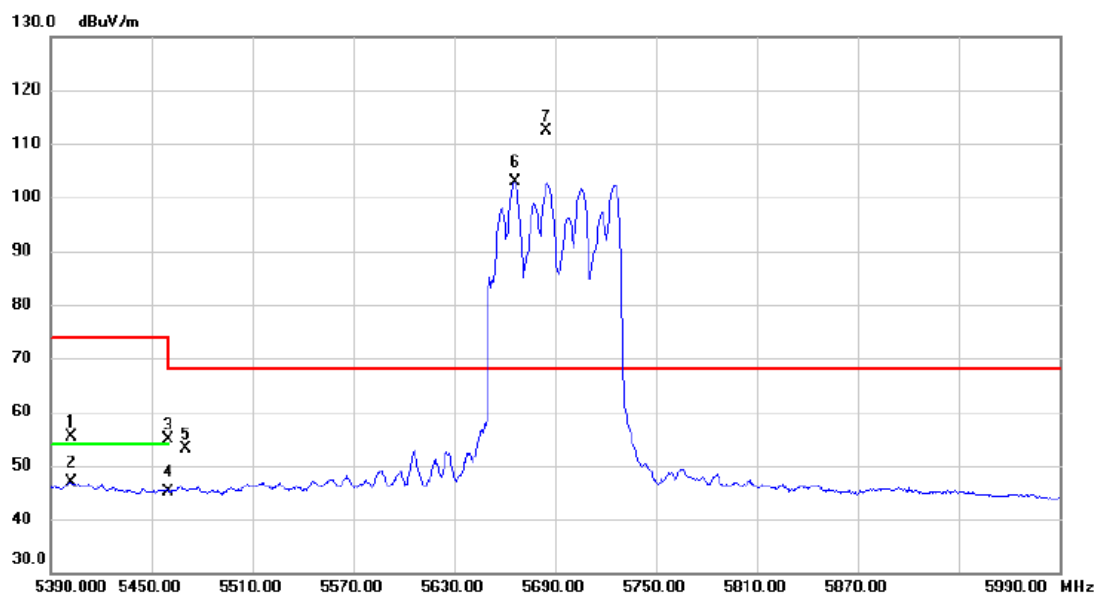


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5402.000	41.35	14.09	55.44	74.00	-18.56	peak	
2		5402.000	32.71	14.09	46.80	54.00	-7.20	AVG	
3		5460.000	40.70	14.21	54.91	74.00	-19.09	peak	
4		5460.000	31.03	14.21	45.24	54.00	-8.76	AVG	
5		5470.000	38.89	14.22	53.11	68.20	-15.09	peak	
6	X	5666.000	88.16	14.81	102.97	68.20	34.77	AVG	No Limit
7	*	5684.600	97.47	14.88	112.35	68.20	44.15	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5690 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

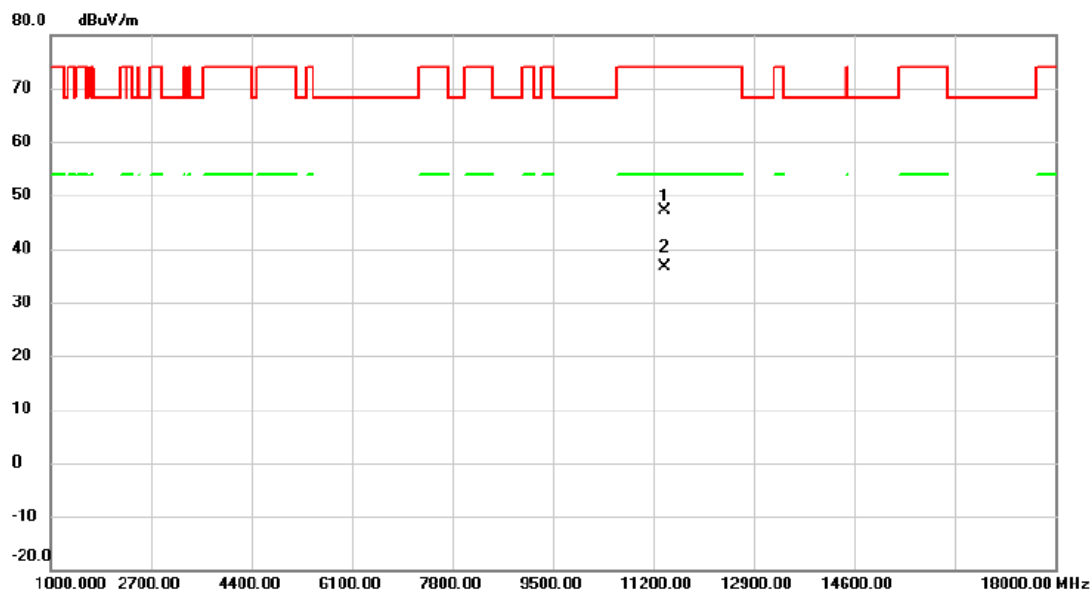


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11397.825	37.55	9.60	47.15	74.00	-26.85	peak	
2	*	11402.350	26.99	9.59	36.58	54.00	-17.42	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TXBE(EHT20) Mode 5720 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

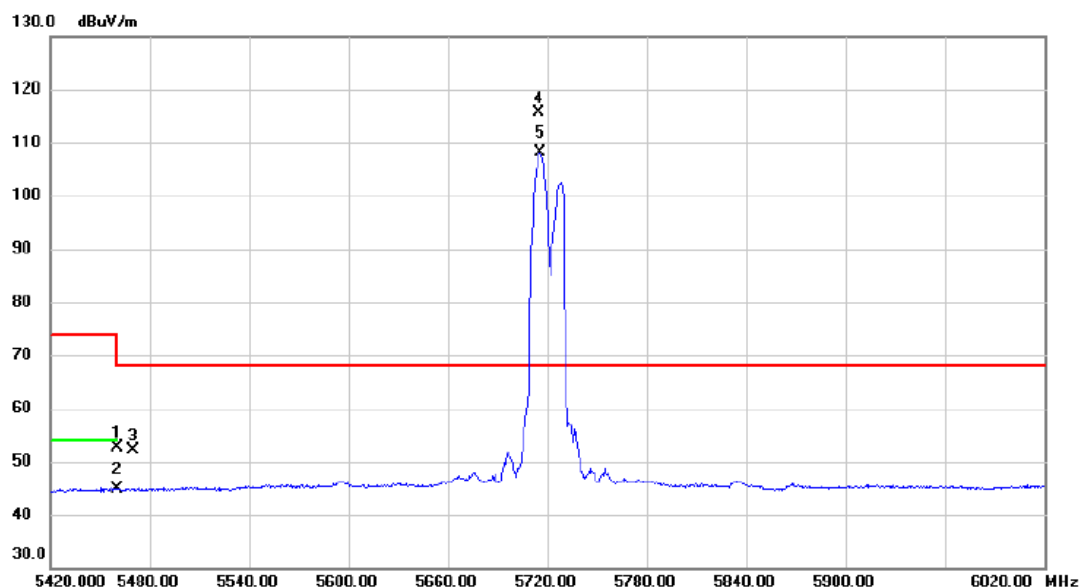


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	38.40	14.21	52.61	74.00	-21.39	peak	
2		5460.000	30.61	14.21	44.82	54.00	-9.18	AVG	
3		5470.000	37.99	14.22	52.21	68.20	-15.99	peak	
4	*	5714.900	100.59	14.97	115.56	68.20	47.36	peak	No Limit
5	X	5715.500	93.06	14.97	108.03	68.20	39.83	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT20) Mode 5720 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

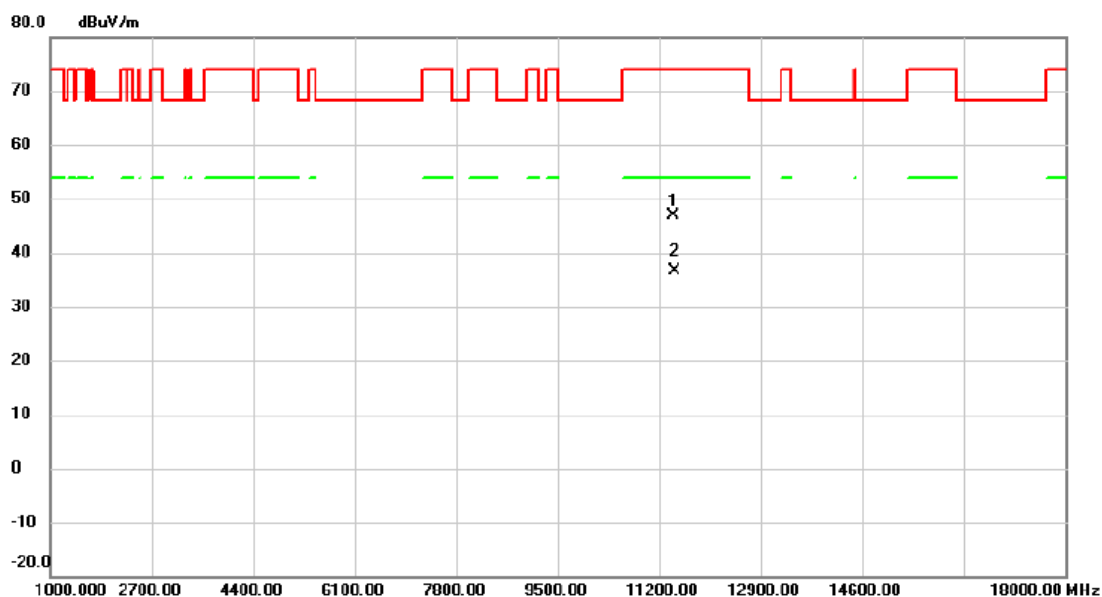


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11438.175	37.16	9.63	46.79	74.00	-27.21	peak	
2	*	11458.225	27.02	9.64	36.66	54.00	-17.34	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT40) Mode 5710 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

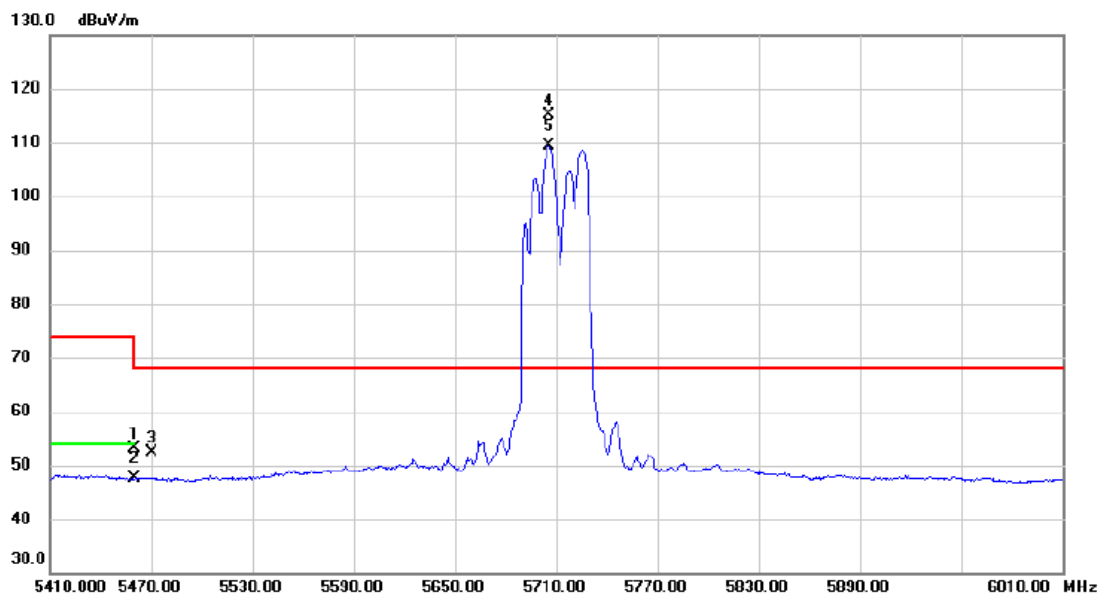


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	38.90	14.21	53.11	74.00	-20.89	peak	
2		5460.000	33.44	14.21	47.65	54.00	-6.35	AVG	
3		5470.000	38.17	14.22	52.39	68.20	-15.81	peak	
4	*	5705.500	100.29	14.93	115.22	68.20	47.02	peak	No Limit
5	X	5705.800	94.53	14.93	109.46	68.20	41.26	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT40) Mode 5710 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

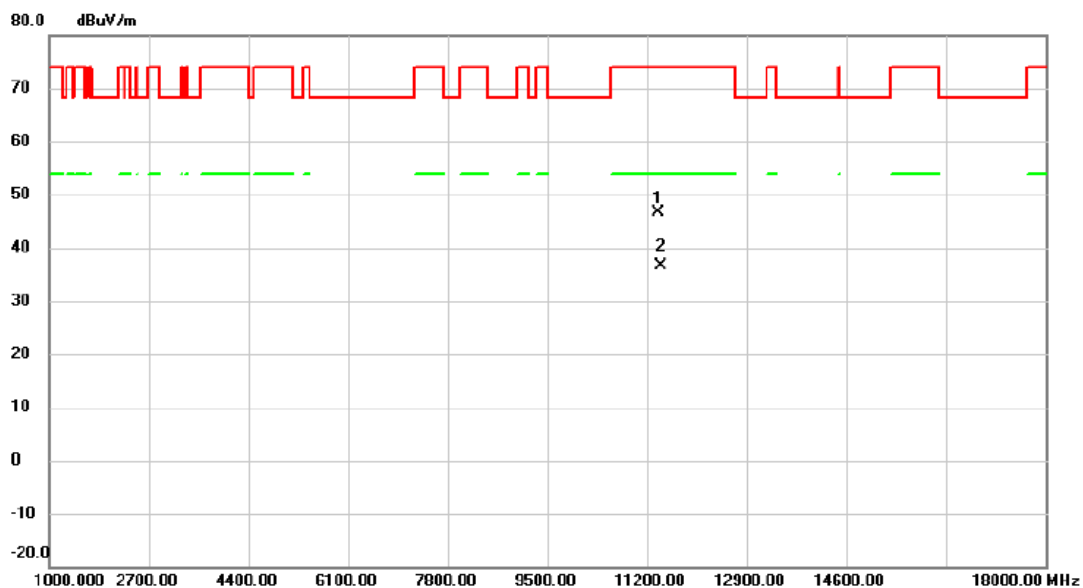


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11398.675	37.14	9.59	46.73	74.00	-27.27	peak	
2	*	11441.650	26.98	9.62	36.60	54.00	-17.40	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT80) Mode 5690 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

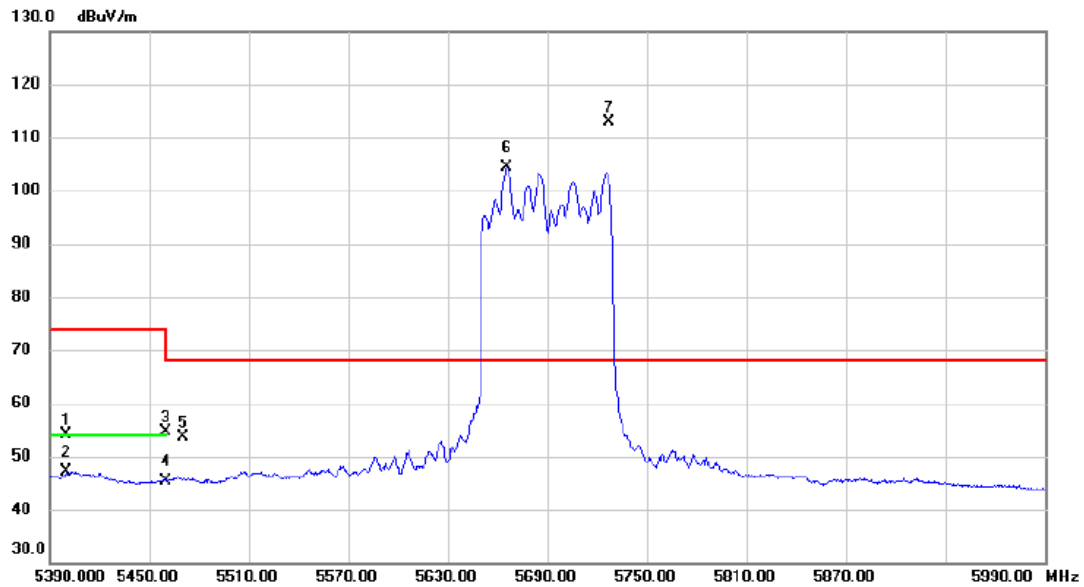


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5399.900	40.17	14.08	54.25	74.00	-19.75	peak	
2		5399.900	33.10	14.08	47.18	54.00	-6.82	AVG	
3		5460.000	40.34	14.21	54.55	74.00	-19.45	peak	
4		5460.000	31.19	14.21	45.40	54.00	-8.60	AVG	
5		5470.000	39.49	14.22	53.71	68.20	-14.49	peak	
6	X	5665.700	89.45	14.81	104.26	68.20	36.06	AVG	No Limit
7	*	5727.200	97.87	15.00	112.87	68.20	44.67	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT80) Mode 5690 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

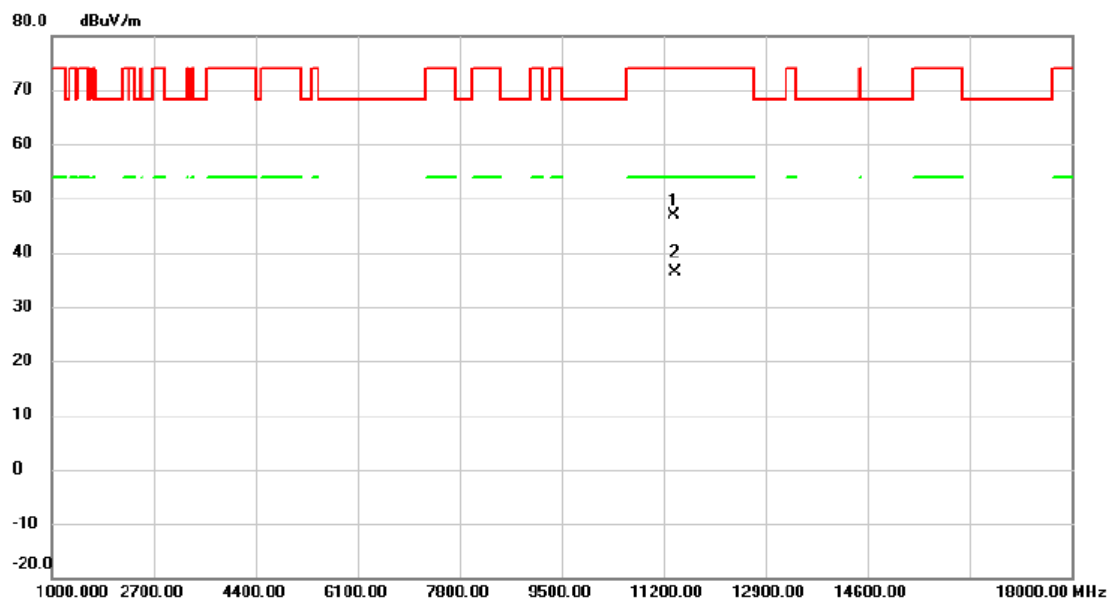


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11377.625	37.25	9.57	46.82	74.00	-27.18	peak	
2	*	11399.825	26.88	9.59	36.47	54.00	-17.53	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT240) Mode 5650 MHz	Polarization	Vertical
-----------	-------------------------------------	--------------	----------

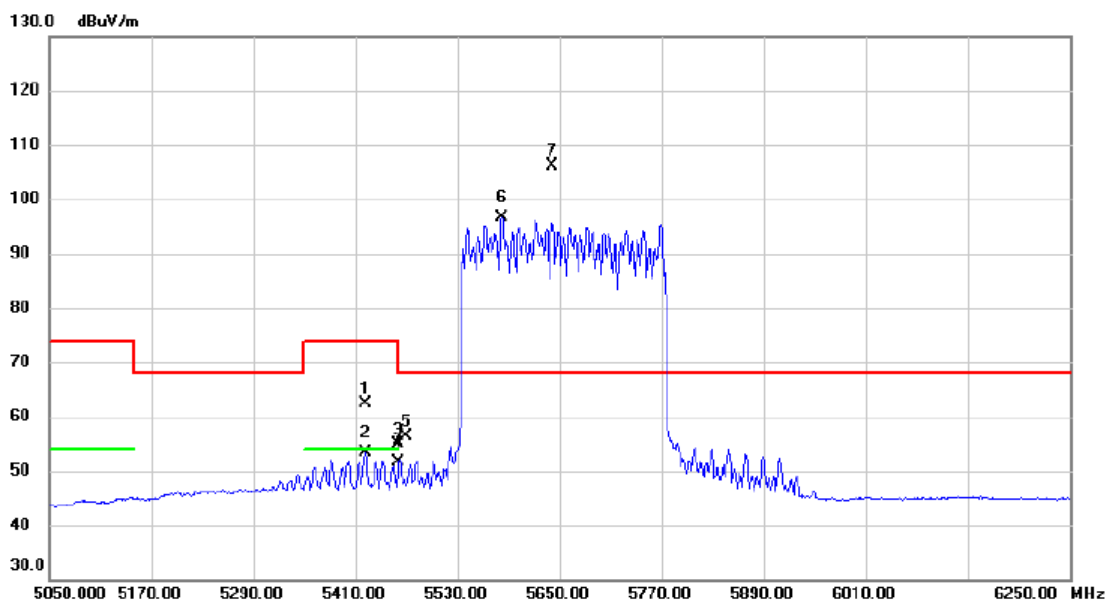


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5422.000	48.15	14.13	62.28	74.00	-11.72	peak	
2		5422.000	39.32	14.13	53.45	54.00	-0.55	AVG	
3		5460.000	40.79	14.21	55.00	74.00	-19.00	peak	
4		5460.000	37.30	14.21	51.51	54.00	-2.49	AVG	
5		5470.000	42.13	14.22	56.35	68.20	-11.85	peak	
6	X	5582.200	82.13	14.55	96.68	68.20	28.48	AVG	No Limit
7	*	5641.600	91.47	14.73	106.20	68.20	38.00	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT240) Mode 5650 MHz	Polarization	Vertical
-----------	-------------------------------------	--------------	----------

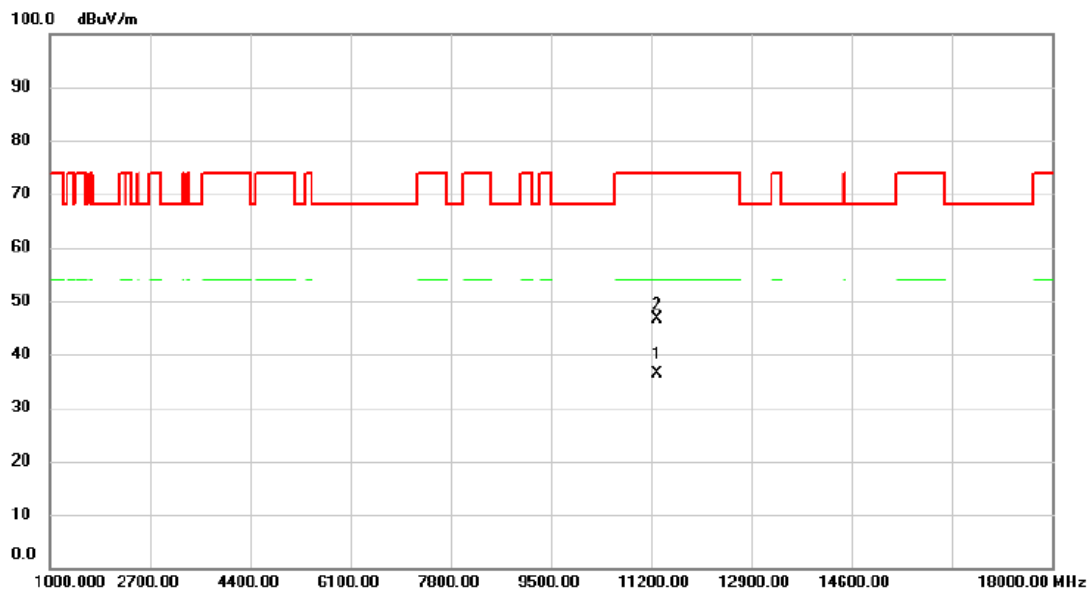


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11300.150	26.85	9.51	36.36	54.00	-17.64	AVG	
2		11301.550	37.20	9.51	46.71	74.00	-27.29	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX A Mode Channel 165 (UNII-3)	Polarization	Vertical
-----------	--------------------------------	--------------	----------

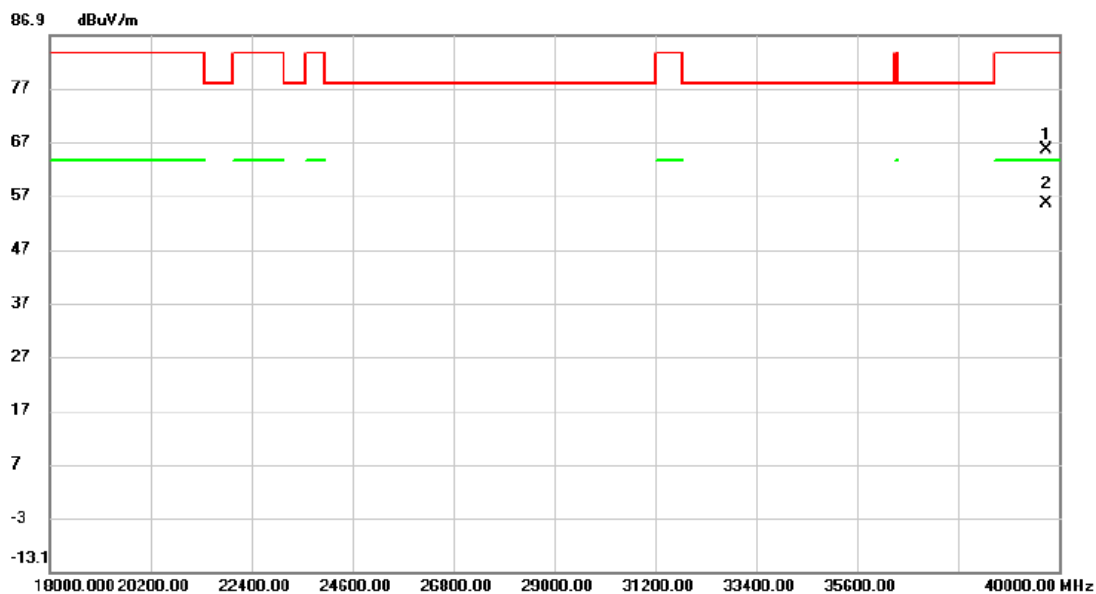


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		39714.000	51.23	14.26	65.49	83.50	-18.01	peak	
2	*	39714.000	41.35	14.26	55.61	63.50	-7.89	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX A Mode Channel 165 (UNII-3)	Polarization	Horizontal
-----------	--------------------------------	--------------	------------

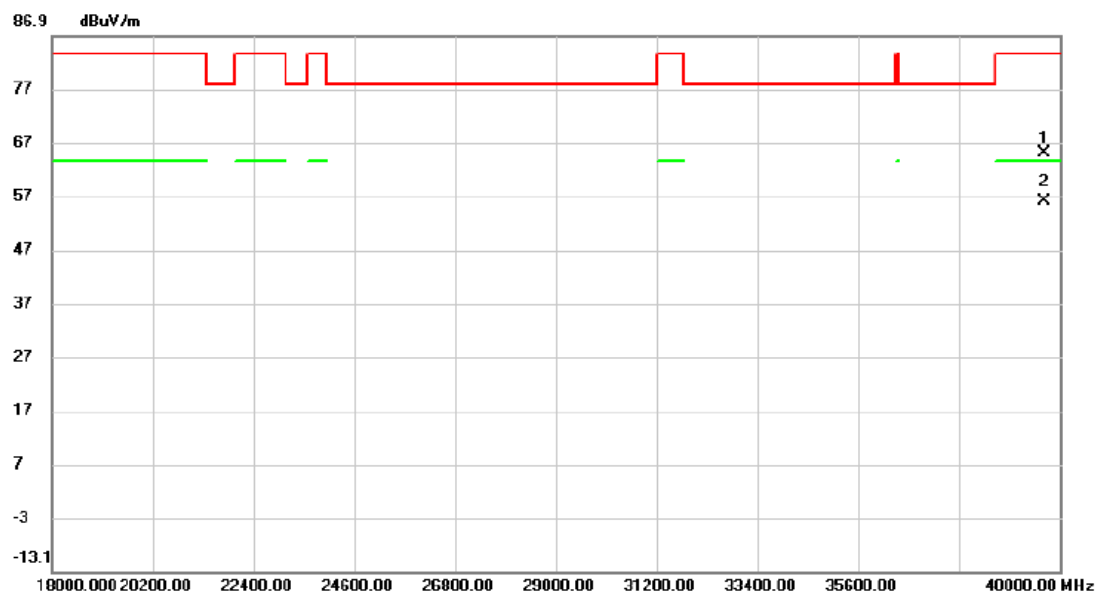

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		39648.000	50.85	14.19	65.04	83.50	-18.46	peak	
2	*	39648.000	41.79	14.19	55.98	63.50	-7.52	AVG	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH

Test Mode	UNII-1_TX AC(VHT20) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	23.549	18.000
40	5200	22.399	18.000
48	5240	23.090	18.100

CH36

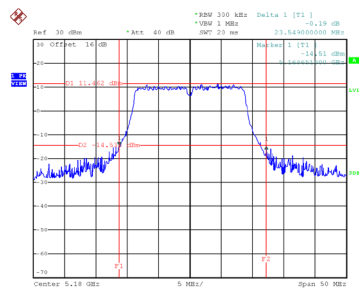


Date: 25.OCT.2024 10:08:49

CH40
26 dB Bandwidth

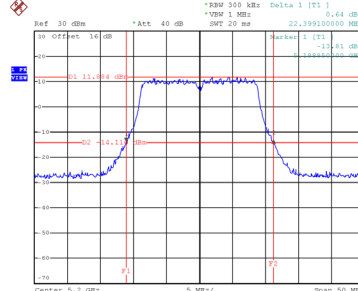


Date: 25.OCT.2024 10:09:40

CH48

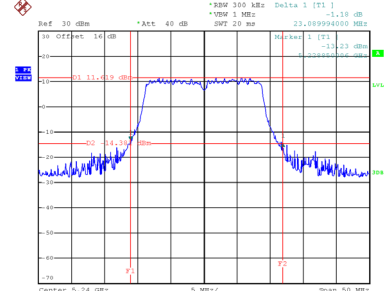


Date: 25.OCT.2024 10:10:32


99 % Occupied Bandwidth

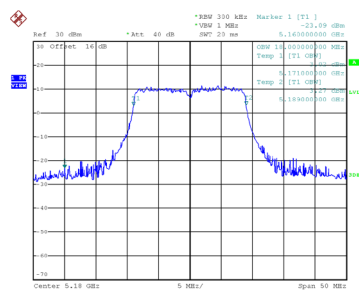

Date: 25.OCT.2024 10:08:17

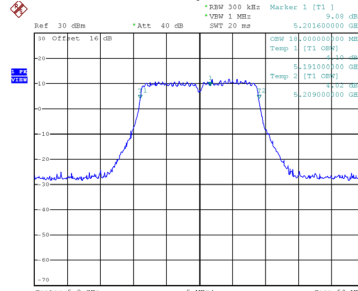

Date: 25.OCT.2024 10:09:08

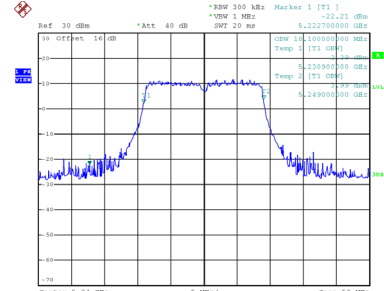


Date: 25.OCT.2024 10:09:59

Test Mode	UNII-1_TX AC(VHT40) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	44.390	37.600
46	5230	46.100	37.800

CH38

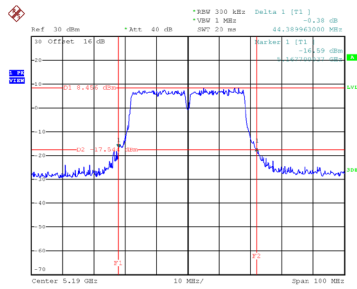


Date: 25.OCT.2024 11:01:48

CH46
26 dB Bandwidth

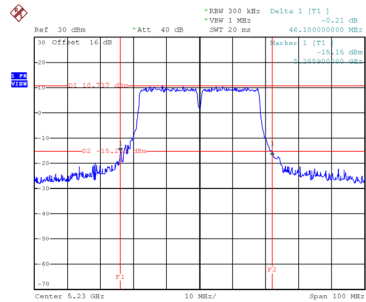


Date: 25.OCT.2024 11:04:30

99 % Occupied Bandwidth

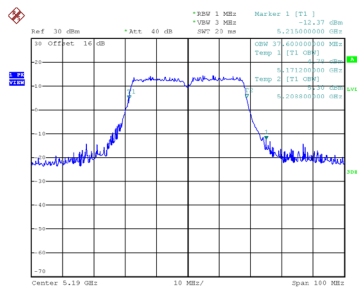

Date: 25.OCT.2024 11:00:52

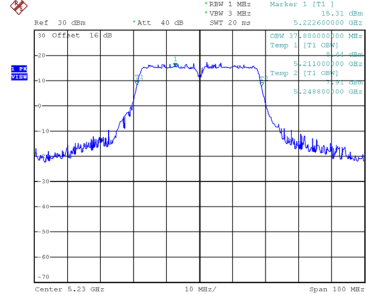


Date: 25.OCT.2024 11:04:00

Test Mode	UNII-1_TX AC(VHT80) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
42	5210	91.994	77.200

CH42 26 dB Bandwidth

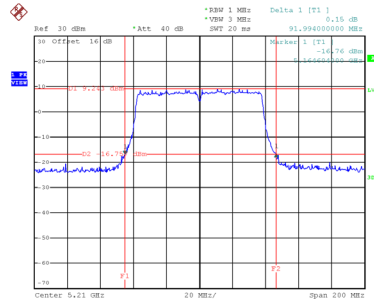

Date: 25.OCT.2024 11:38:25

99 % Occupied Bandwidth

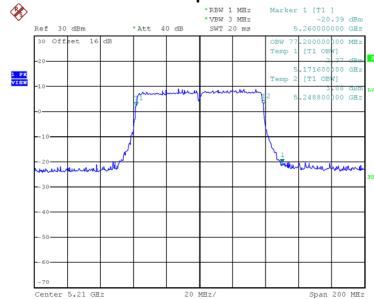


Date: 25.OCT.2024 11:37:39

Test Mode	UNII-1_TX AX(HE20) Mode
-----------	-------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	22.799	19.200
40	5200	22.890	19.200
48	5240	22.700	19.200

CH36

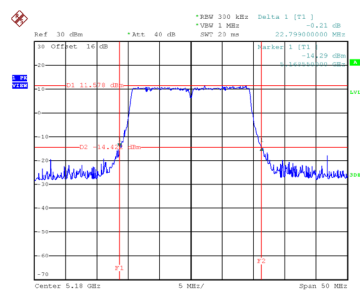


Date: 25.OCT.2024 10:22:18

CH40
26 dB Bandwidth

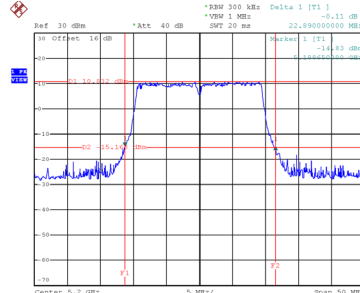


Date: 25.OCT.2024 10:23:14

CH48

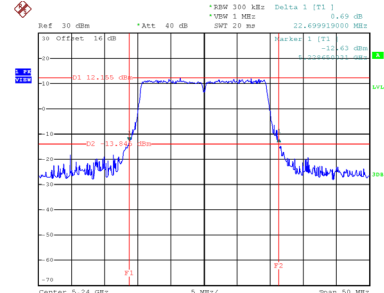


Date: 25.OCT.2024 10:23:56


99 % Occupied Bandwidth

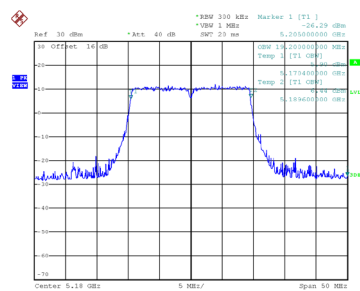

Date: 25.OCT.2024 10:21:46

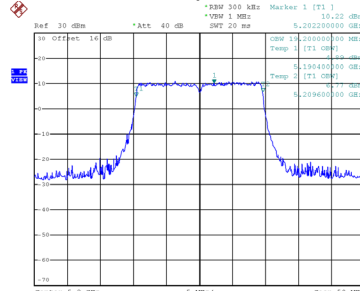

Date: 25.OCT.2024 10:22:43

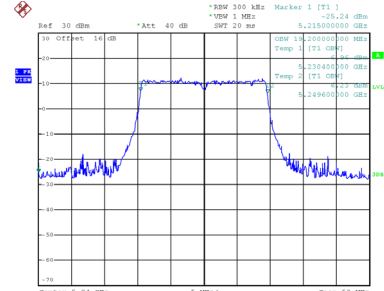


Date: 25.OCT.2024 10:23:24

Test Mode	UNII-1_TX AX(HE40) Mode
-----------	-------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	43.400	38.600
46	5230	45.995	38.800

CH38

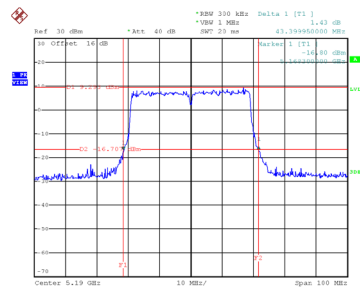


Date: 25.OCT.2024 11:17:07

CH46
26 dB Bandwidth

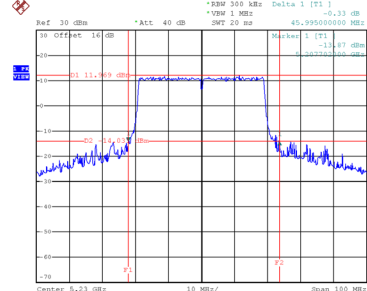


Date: 25.OCT.2024 11:18:00

99 % Occupied Bandwidth

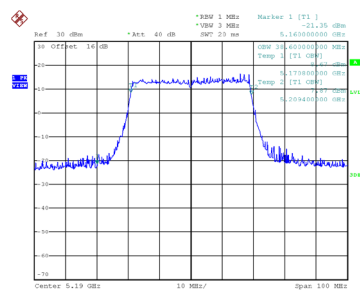

Date: 25.OCT.2024 11:16:18

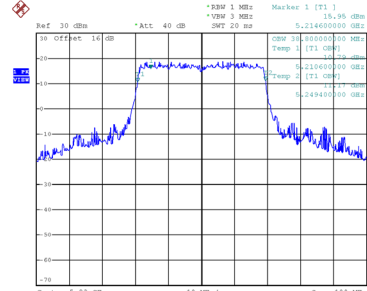


Date: 25.OCT.2024 11:17:29

Test Mode	UNII-1_TX AX(HE80) Mode
-----------	-------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
42	5210	87.596	78.000

CH42 26 dB Bandwidth

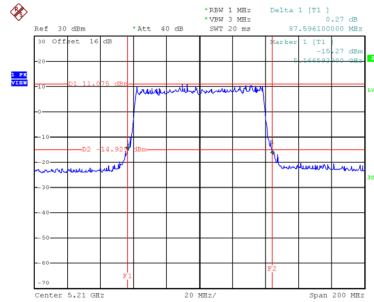

Date: 25.OCT.2024 11:48:01

99 % Occupied Bandwidth

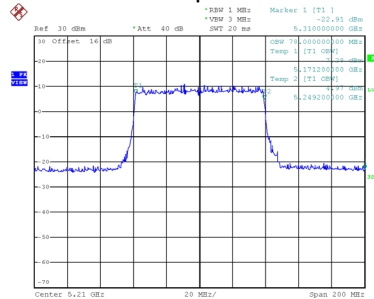


Date: 25.OCT.2024 11:47:11

Test Mode	UNII-1_TX BE(EHT20) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	25.490	19.200
40	5200	24.350	19.200
48	5240	24.909	19.300

CH36

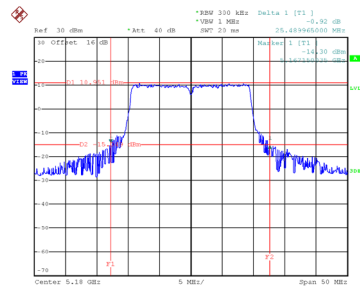


Date: 25.OCT.2024 10:41:20

CH40
26 dB Bandwidth

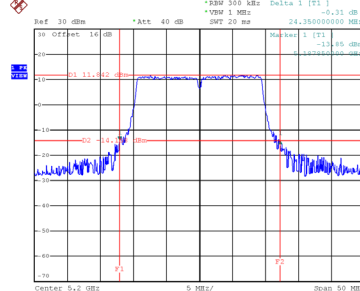


Date: 25.OCT.2024 10:42:13

CH48

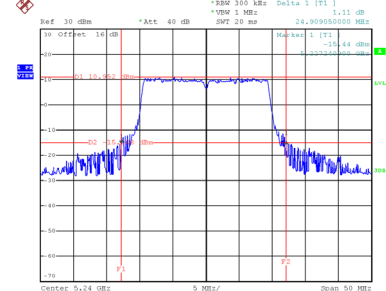


Date: 25.OCT.2024 10:46:26


99 % Occupied Bandwidth

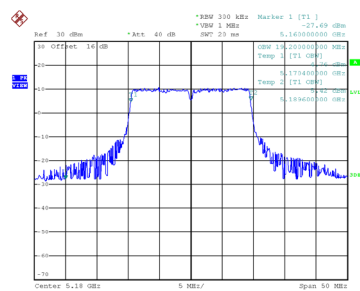

Date: 25.OCT.2024 10:40:46

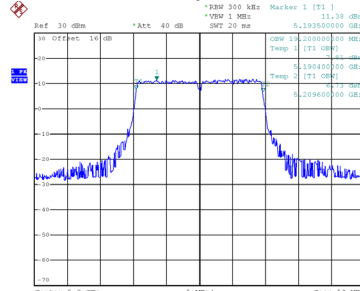

Date: 25.OCT.2024 10:41:44

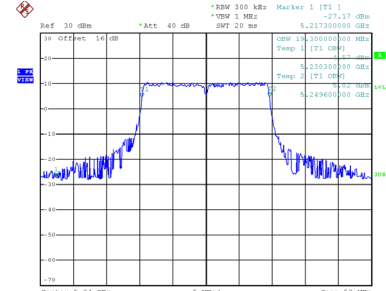


Date: 25.OCT.2024 10:45:54

Test Mode	UNII-1_TX BE(EHT40) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	43.190	38.600
46	5230	47.808	38.800

CH38

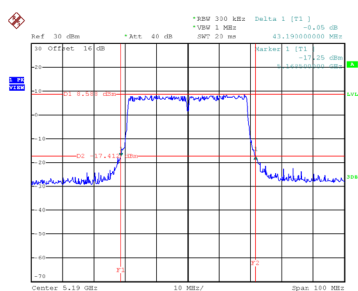


Date: 25.OCT.2024 11:27:42

CH46
26 dB Bandwidth

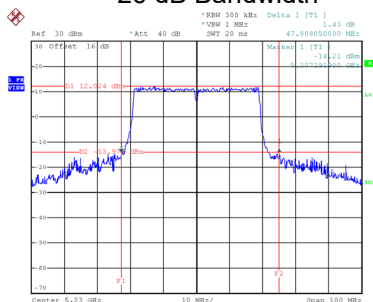


Date: 25.OCT.2024 11:28:44

99 % Occupied Bandwidth

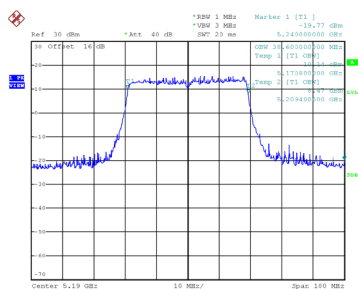

Date: 25.OCT.2024 11:26:51

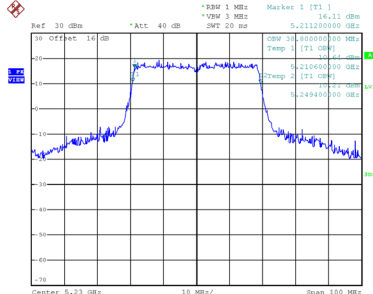


Date: 25.OCT.2024 11:28:01

Test Mode	UNII-1_TX BE(EHT80) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
42	5210	87.196	78.000

CH42 26 dB Bandwidth

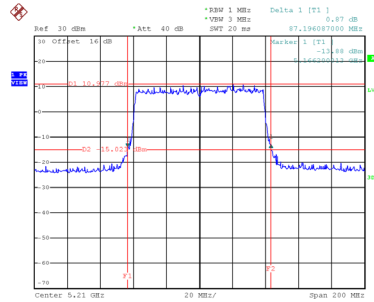

Date: 25.OCT.2024 11:54:56

99 % Occupied Bandwidth

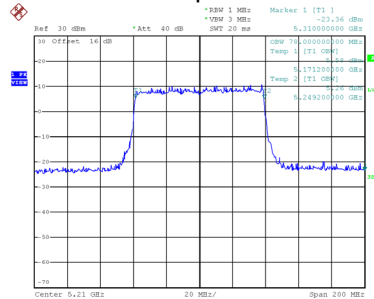


Date: 25.OCT.2024 11:54:09

Test Mode	UNII-2A_TX A Mode
-----------	-------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	22.707	17.000
60	5300	22.550	17.100
64	5320	22.090	17.000

CH52

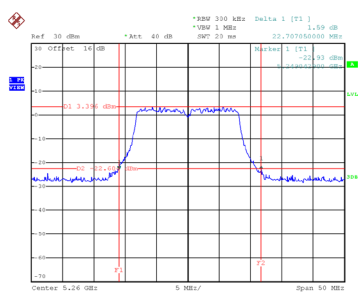


Date: 25.OCT.2024 09:16:40

CH60
26 dB Bandwidth

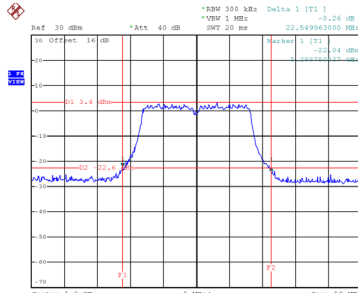


Date: 25.OCT.2024 09:17:48

CH64

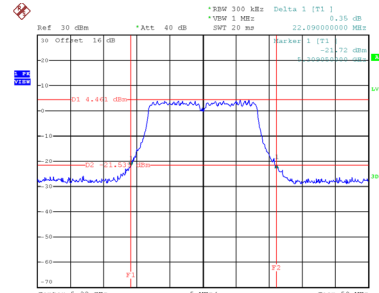


Date: 25.OCT.2024 09:18:43


99 % Occupied Bandwidth

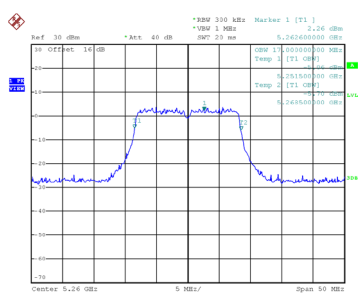

Date: 25.OCT.2024 09:16:09

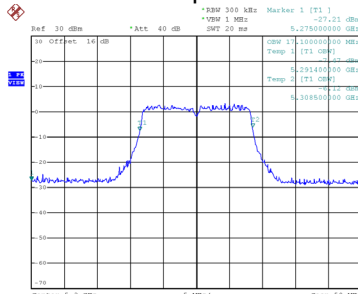

Date: 25.OCT.2024 09:17:16

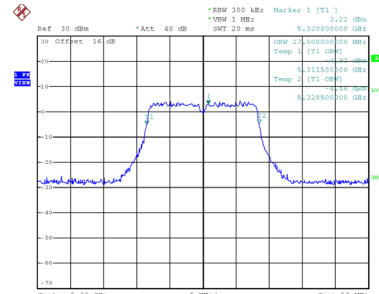


Date: 25.OCT.2024 09:18:10

Test Mode	UNII-2A_TX AC(VHT20) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	23.290	18.200
60	5300	23.550	18.200
64	5320	22.897	18.100

CH52

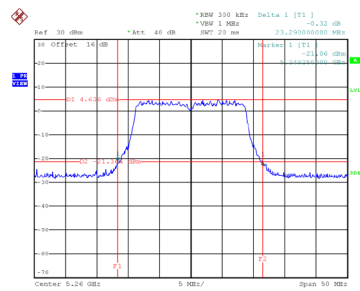


Date: 25.OCT.2024 10:18:56

CH60
26 dB Bandwidth

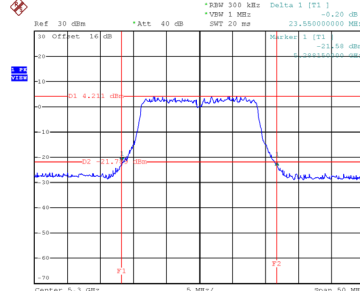


Date: 25.OCT.2024 10:19:40

CH64

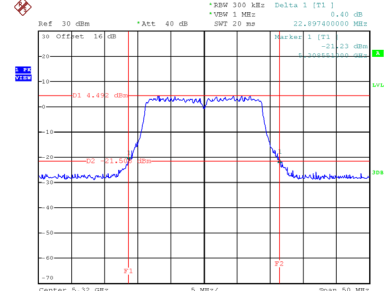


Date: 25.OCT.2024 10:20:24


99 % Occupied Bandwidth

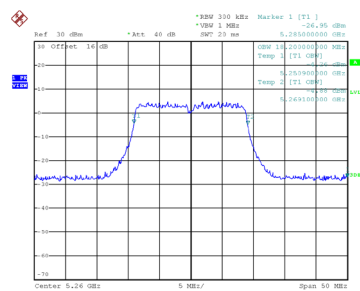

Date: 25.OCT.2024 10:18:25

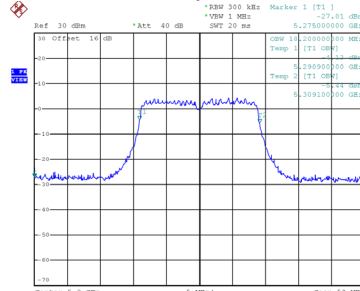

Date: 25.OCT.2024 10:19:11

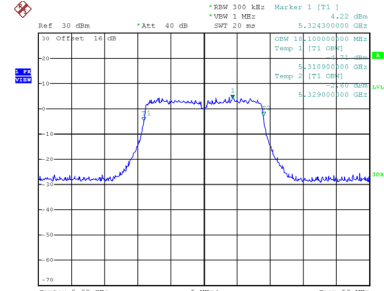


Date: 25.OCT.2024 10:19:51

Test Mode	UNII-2A_TX AC(VHT40) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
54	5270	44.990	37.800
62	5310	45.990	37.800

CH54

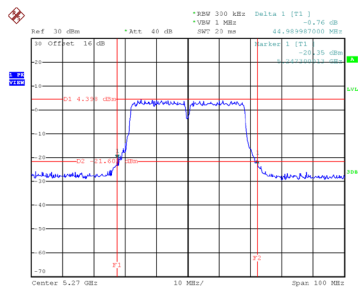


Date: 25.OCT.2024 11:05:39

CH62
26 dB Bandwidth

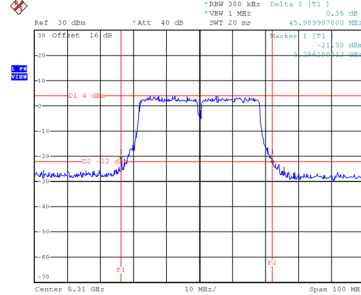


Date: 25.OCT.2024 11:06:47

99 % Occupied Bandwidth

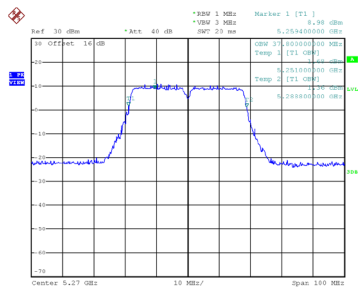

Date: 25.OCT.2024 11:06:54

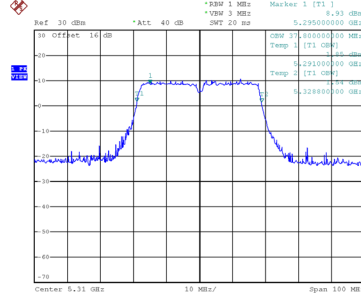


Date: 25.OCT.2024 11:06:00

Test Mode	UNII-2A_TX AC(VHT80) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
58	5290	91.600	76.800

CH58 26 dB Bandwidth

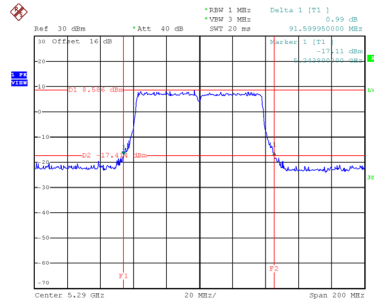

Date: 25.OCT.2024 11:42:27

99 % Occupied Bandwidth

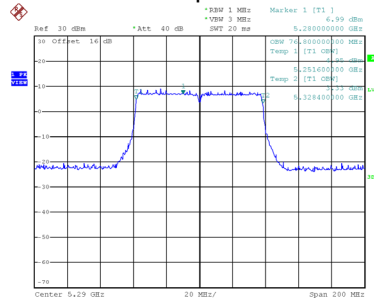


Date: 25.OCT.2024 11:41:36

Test Mode	UNII-2A_TX AX(HE20) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	22.990	19.200
60	5300	22.900	19.200
64	5320	23.050	19.200

CH52

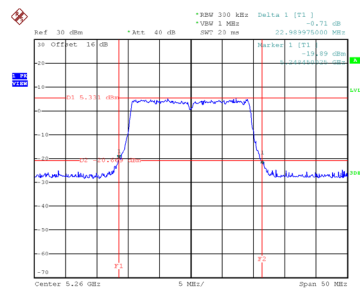


Date: 25.OCT.2024 10:24:51

CH60
26 dB Bandwidth

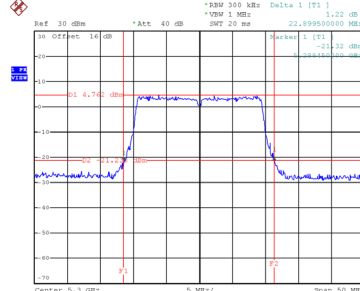


Date: 25.OCT.2024 10:26:33

CH64

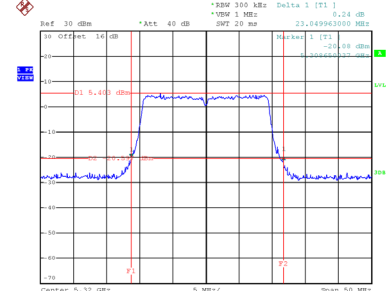


Date: 25.OCT.2024 10:27:44


99 % Occupied Bandwidth

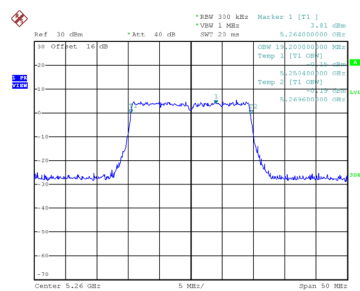

Date: 25.OCT.2024 10:24:18

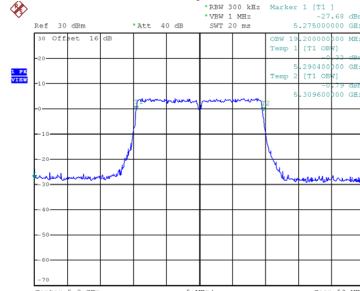

Date: 25.OCT.2024 10:25:09

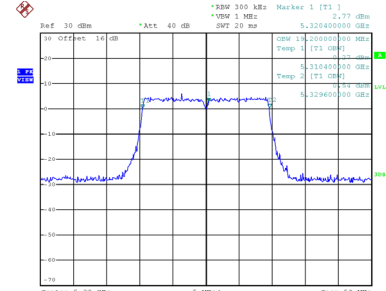


Date: 25.OCT.2024 10:27:13

Test Mode	UNII-2A_TX AX(HE40) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
54	5270	45.300	38.800
62	5310	44.600	38.800

CH54

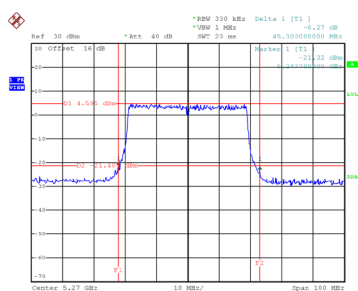


Date: 25.OCT.2024 11:19:23

CH62
26 dB Bandwidth

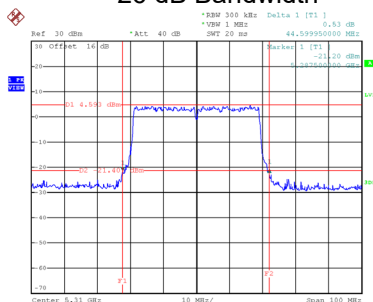


Date: 25.OCT.2024 11:20:32

99 % Occupied Bandwidth

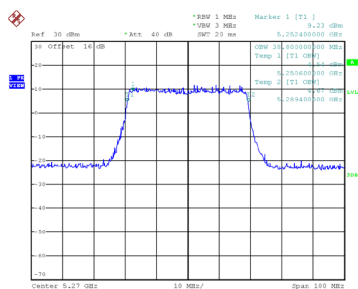

Date: 25.OCT.2024 11:18:39

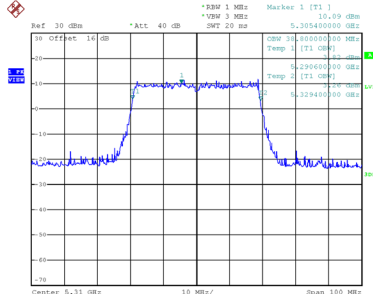


Date: 25.OCT.2024 11:19:47

Test Mode	UNII-2A_TX AX(HE80) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
58	5290	89.000	78.400

CH58 26 dB Bandwidth

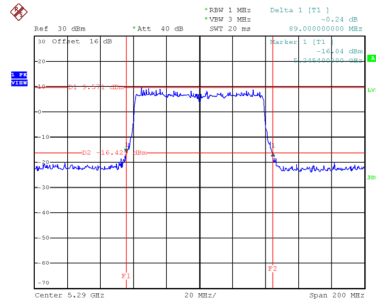

Date: 25.OCT.2024 11:49:04

99 % Occupied Bandwidth

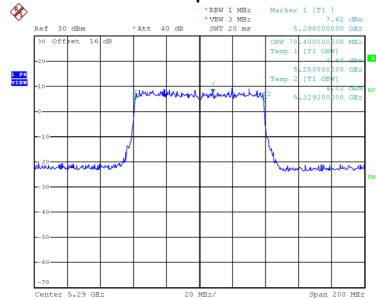


Date: 25.OCT.2024 11:48:23

Test Mode	UNII-2A_TX BE(EHT20) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	23.998	19.200
60	5300	24.890	19.200
64	5320	23.750	19.200

CH52

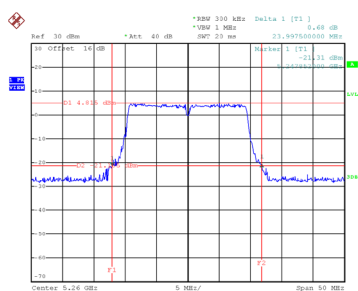


Date: 25.OCT.2024 10:48:04

CH60
26 dB Bandwidth

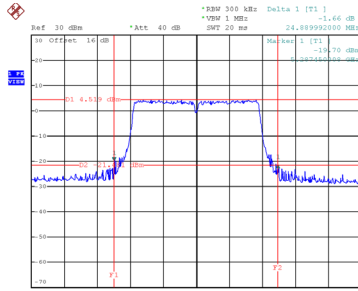


Date: 25.OCT.2024 10:48:51

CH64

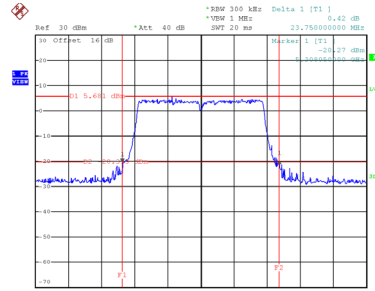


Date: 25.OCT.2024 10:50:55


99 % Occupied Bandwidth

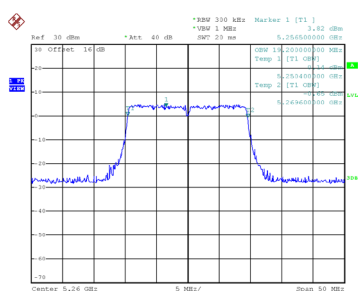

Date: 25.OCT.2024 10:47:33

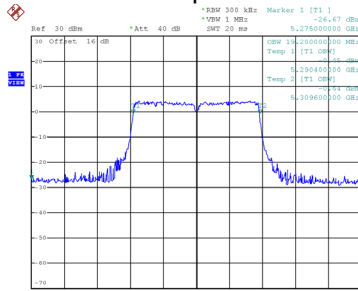

Date: 25.OCT.2024 10:48:20

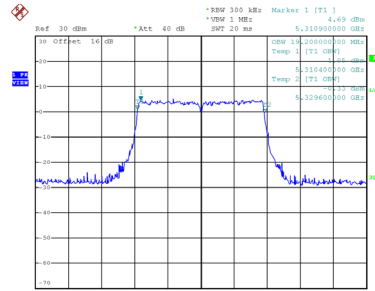


Date: 25.OCT.2024 10:50:25

Test Mode	UNII-2A_TX BE(EHT40) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
54	5270	44.300	38.600
62	5310	43.900	38.800

CH54

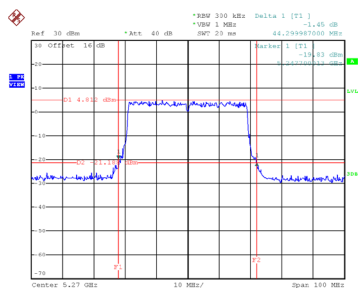


Date: 25.OCT.2024 11:30:02

CH62
26 dB Bandwidth

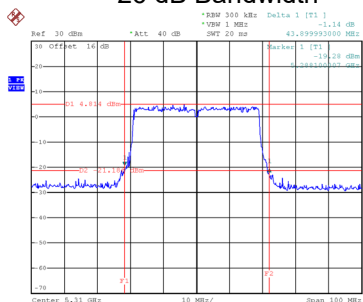


Date: 25.OCT.2024 11:31:10

99 % Occupied Bandwidth

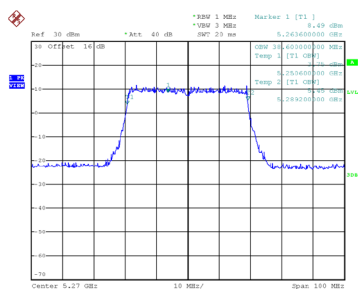

Date: 25.OCT.2024 11:29:17

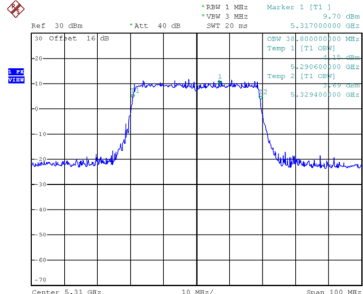


Date: 25.OCT.2024 11:30:22

Test Mode	UNII-2A_TX BE(EHT80) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
58	5290	87.800	78.400

CH58 26 dB Bandwidth

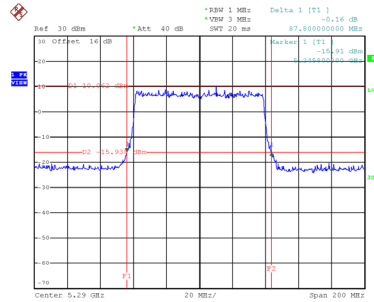

Date: 25.OCT.2024 11:55:59

99 % Occupied Bandwidth

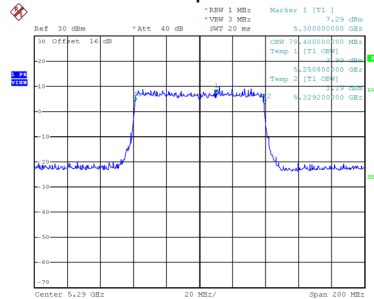

Date: 25.OCT.2024 11:55:16