

FCC Test Report (PART 24)

Report No.: RF190819E05-1

FCC ID: NKRM18QF

Test Model: M18QF

Series Model: M18QA, M14QF, M14QA

Received Date: Aug. 19, 2019

Test Date: Aug. 29 to Sep. 04, 2019

Issued Date: Oct. 19, 2019

Applicant: Wistron NeWeb Corporation

Address: 20 Park Ave. II, Hsinchu Science Park, Hsinchu 308, Taiwan

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Test Site and Instruments	7
3 General Information	9
3.1 General Description of EUT	9
3.2 Configuration of System under Test	11
3.2.1 Description of Support Units	12
3.3 Test Mode Applicability and Tested Channel Detail	13
3.4 EUT Operating Conditions	14
3.5 General Description of Applied Standards	15
4 Test Types and Results	16
4.1 Output Power Measurement	16
4.1.1 Limits of Output Power Measurement	16
4.1.2 Test Procedures	16
4.1.3 Test Setup	16
4.1.4 Test Results	17
4.2 Modulation Characteristics Measurement	22
4.2.1 Limits of Modulation Characteristics	22
4.2.2 Test Procedure	22
4.2.3 Test Setup	22
4.2.4 Test Results	23
4.3 Frequency Stability Measurement	24
4.3.1 Limits of Frequency Stability Measurement	24
4.3.2 Test Procedure	24
4.3.3 Test Setup	24
4.3.4 Test Results	25
4.4 Occupied Bandwidth Measurement	27
4.4.1 Test Procedure	27
4.4.2 Test Setup	27
4.4.3 Test Result (-26dB Bandwidth)	28
4.4.4 Test Result (Occupied Bandwidth)	31
4.5 Band Edge Measurement	34
4.5.1 Limits of Band Edge Measurement	34
4.5.2 Test Setup	34
4.5.3 Test Procedures	34
4.5.4 Test Results	35
4.6 Peak to Average Ratio	42
4.6.1 Limits of Peak to Average Ratio Measurement	42
4.6.2 Test Setup	42
4.6.3 Test Procedures	42
4.6.4 Test Results	43
4.7 Conducted Spurious Emissions	46
4.7.1 Limits of Conducted Spurious Emissions Measurement	46
4.7.2 Test Setup	46
4.7.3 Test Procedure	46
4.7.4 Test Results	47
4.8 Radiated Emission Measurement	68
4.8.1 Limits of Radiated Emission Measurement	68
4.8.2 Test Procedure	68
4.8.3 Deviation from Test Standard	68
4.8.4 Test Setup	69

4.8.5 Test Results	70
5 Pictures of Test Arrangements.....	112
Appendix – Information of the Testing Laboratories	113

Release Control Record

Issue No.	Description	Date Issued
RF190819E05-1	Original release.	Oct. 19, 2019

1 Certificate of Conformity

Product: M2M DATA MODULE

Brand: Wistron NeWeb Corporation

Test Model: M18QF

Series Model: M18QA, M14QF, M14QA

Sample Status: ENGINEERING SAMPLE

Applicant: Wistron NeWeb Corporation

Test Date: Aug. 29 to Sep. 04, 2019

Standards: FCC Part 24 Subpart E

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Phoenix Huang, **Date:** Oct. 19, 2019
Phoenix Huang / Specialist

Approved by : May Chen, **Date:** Oct. 19, 2019
May Chen / Manager

2 Summary of Test Results

Applied Standard: FCC Part 24 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 24.232	Equivalent Isotropically Radiated Power	PASS	Meet the requirement of limit.
2.1046 24.232(d)	Peak To Average Ratio	PASS	Meet the requirement of limit.
2.1047	Modulation characteristics	PASS	Meet the requirement
2.1055 24.235	Frequency Stability	PASS	Meet the requirement of limit.
2.1049 24.238(b)	Occupied Bandwidth	PASS	Meet the requirement of limit.
24.238(b)	Band Edge Measurements	PASS	Meet the requirement of limit.
2.1051 24.238	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
2.1053 24.238	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -13.24 dB at 7520 MHz.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.0 dB
	30MHz ~ 1GHz	4.9 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.1 dB
	6GHz ~ 18GHz	4.9 dB
	18GHz ~ 40GHz	5.2 dB

2.2 Test Site and Instruments

For radiated spurious emissions test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 03, 2019	July 02, 2020
Pre-Amplifier EMCI	EMC001340	980142	May 30, 2019	May 29, 2020
Loop Antenna Electro-Metrics	EM-6879	264	Jan. 22, 2019	Jan. 21, 2020
RF Cable	NA	LOOPCAB-001	Jan. 14, 2019	Jan. 13, 2020
RF Cable	NA	LOOPCAB-002	Jan. 14, 2019	Jan. 13, 2020
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-01	Oct. 30, 2018	Oct. 29, 2019
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-406	Nov. 22, 2018	Nov. 21, 2019
RF Cable	8D	966-4-1	Mar. 19, 2019	Mar. 18, 2020
RF Cable	8D	966-4-2	Mar. 19, 2019	Mar. 18, 2020
RF Cable	8D	966-4-3	Mar. 19, 2019	Mar. 18, 2020
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-4-01	Sep. 27, 2018	Sep. 26, 2019
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-783	Nov. 25, 2018	Nov. 24, 2019
Pre-Amplifier EMCI	EMC12630SE	980385	Aug. 15, 2019	Aug. 14, 2020
RF Cable	EMC104-SM-SM-1200	160923	Jan. 28, 2019	Jan. 27, 2020
RF Cable	104 RF cable	131215	Jan. 10, 2019	Jan. 09, 2020
RF Cable	EMC104-SM-SM-6000	180418	May 03, 2019	May 02, 2020
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 28, 2019	Jan. 27, 2020
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 25, 2018	Nov. 24, 2019
RF Cable	EMC102-KM-KM-1200	160924	Jan. 28, 2019	Jan. 27, 2020
RF Cable	EMC102-KM-KM-1200	160925	Jan. 28, 2019	Jan. 27, 2020
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 4.
3. Loop antenna was used for all emissions below 30 MHz.
4. Tested Date: Aug. 29 to Sep. 03, 2019

For other test items:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSV40	100964	June 04, 2019	June 03, 2020
Spectrum Analyzer Agilent	E4446A	MY48250253	July 24, 2019	July 23, 2020
Power meter Anritsu	ML2495A	1014008	May 13, 2019	May 12, 2020
Power sensor Anritsu	MA2411B	0917122	May 13, 2019	May 12, 2020
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 15, 2019	Apr. 14, 2020
AC Power Source Extech Electronics	6205	1440452	NA	NA
DC Power Supply Topward	6603D	795558	NA	NA
Temperature & Humidity Chamber Giant Force	GTH-150-40-SP-AR	MAA0812-008	Jan. 09, 2019	Jan. 08, 2020
True RMS Clamp Meter FLUKE	325	31130711WS	May 21, 2019	May 20, 2020
ESG Vector signal generator Agilent	E4438C	MY45094468/005 506 602 UK6 UNJ	Nov. 19, 2018	Nov. 18, 2019
Mech Switch Absorptive Mini-Circuits	MSP4TA-18+	0140	Feb. 11, 2019	Feb. 10, 2020
FXD ATTEN Mini-Circuits	BW-S3W2+	MN71981	Feb. 11, 2019	Feb. 10, 2020
Software	ADT_RF Test Software V6.6.5.4	NA	NA	NA
Universal Radio Communication Tester R&S	CMU200	121040	Apr. 17, 2019	Apr. 16, 2020
LTE Wireless Communication Test Set Keysight	E7515A	MY55340229	May 29, 2019	May 28, 2020

- Note:**
1. The test was performed in Oven room 2.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: Sep. 03 to 04, 2019

3 General Information

3.1 General Description of EUT

Product	M2M DATA MODULE	
Brand	Wistron NeWeb Corporation	
Test Model	M18QF	
Series Model	M18QA, M14QF, M14QA	
Status of EUT	ENGINEERING SAMPLE	
Power Supply Rating	DC 3.8V from host equipment	
Modulation Type	WCDMA, HSDPA, HSUPA	BPSK
	LTE Band 2	QPSK, 16QAM
Operating Frequency	WCDMA, HSDPA, HSUPA	1852.4 MHz ~ 1907.6 MHz
	LTE Band 2	1850.7 MHz ~ 1909.3 MHz
Max. EIRP Power	WCDMA B2	26.09 dBm
	LTE Band 2 (Channel Bandwidth 1.4MHz)	24.47 dBm
	LTE Band 2 (Channel Bandwidth 3MHz)	24.53 dBm
	LTE Band 2 (Channel Bandwidth 5MHz)	24.29 dBm
	LTE Band 2 (Channel Bandwidth 10MHz)	24.39 dBm
	LTE Band 2 (Channel Bandwidth 15MHz)	24.47 dBm
	LTE Band 2 (Channel Bandwidth 20MHz)	24.27 dBm
	LTE Band 2 (Channel Bandwidth 20MHz)	24.27 dBm
Emission Designator	WCDMA B2	4M14F9W
	LTE Band 2 (Channel Bandwidth 1.4MHz)	QPSK: 1M09G7D 16QAM: 1M09D7W
	LTE Band 2 (Channel Bandwidth 3MHz)	QPSK: 2M70G7D 16QAM: 2M68D7W
	LTE Band 2 (Channel Bandwidth 5MHz)	QPSK: 4M51G7D 16QAM: 4M51D7W
	LTE Band 2 (Channel Bandwidth 10MHz)	QPSK: 8M98G7D 16QAM: 9M00D7W
	LTE Band 2 (Channel Bandwidth 15MHz)	QPSK: 13M5G7D 16QAM: 13M4D7W
	LTE Band 2 (Channel Bandwidth 20MHz)	QPSK: 18M0G7D 16QAM: 17M9D7W
	LTE Band 2 (Channel Bandwidth 20MHz)	QPSK: 18M0G7D 16QAM: 17M9D7W
Antenna Type	Refer to Note	
Antenna Connector	Refer to Note	
Accessory Device	NA	
Data Cable Supplied	NA	

Note:

1. All models are listed as below.

No.	Model Name	Support Spec.	
		LTE	GPS
1	M18QF	CAT4, LTE B2/4/5/12/13, WCDMA B2/5	Yes
2	M18QA	CAT4, LTE B2/4/5/12/14, WCDMA B2/5	No
3	M14QF	CAT1, LTE B2/4/5/12/13, WCDMA B2/5	Yes
4	M14QA	CAT1, LTE B2/4/5/12/14, WCDMA B2/5	No

Note: From the above models, model: M18QF was selected as representative model for the test and its data was recorded in this report.

- M18QF (LTE B2/4/5/12/13; 3G: B2/5) and M18QA (LTE B2/4/5/12/14; 3G: B2/5) are with same layout and the only difference is LTE supporting bands through software control.
- M18QA has only component change for B13/B14 of passive filter. For more details please refer to operation description exhibit.


2. The antennas provided to the EUT, please refer to the following table:

For GPS							
Antenna No.	Brand		Model	Antenna Net Gain (dBi)	Frequency Range (MHz)	Antenna Type	Connector Type
GPS	Master		98619ZSAX029	2.24	1559~1606	Dipole	SMA
For WWAN							
Antenna No.	RF Chain No.	Brand	Model	Antenna Net Gain (dBi)	Frequency Range (MHz)	Antenna Type	Connector Type
1	Main	Wieson	GY115	Please refer to below table	Please refer to below table	Dipole	SMA
2	Aux	Wieson	GY115	Please refer to below table	Please refer to below table	Dipole	SMA

Antenna gain list			
Band	Freq. Range (MHz)	Gain (dBi)	
		Ant 1 (Main)	Ant 2 (Aux)
WCDMA II (B2)	1850~1910	1.56	1.56
WCDMA V (B5)	824~849	3.2	3.2
LTE Band (2)	1850~1910	1.56	1.56
LTE Band (4)	1710~1755	1.62	1.62
LTE Band (5)	824~849	3.2	3.2
LTE Band (12)	698~716	1.49	1.49
LTE Band (13)	777~787	1.66	1.66
LTE Band (14)	788~798	1.60	1.60

3. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 Configuration of System under Test

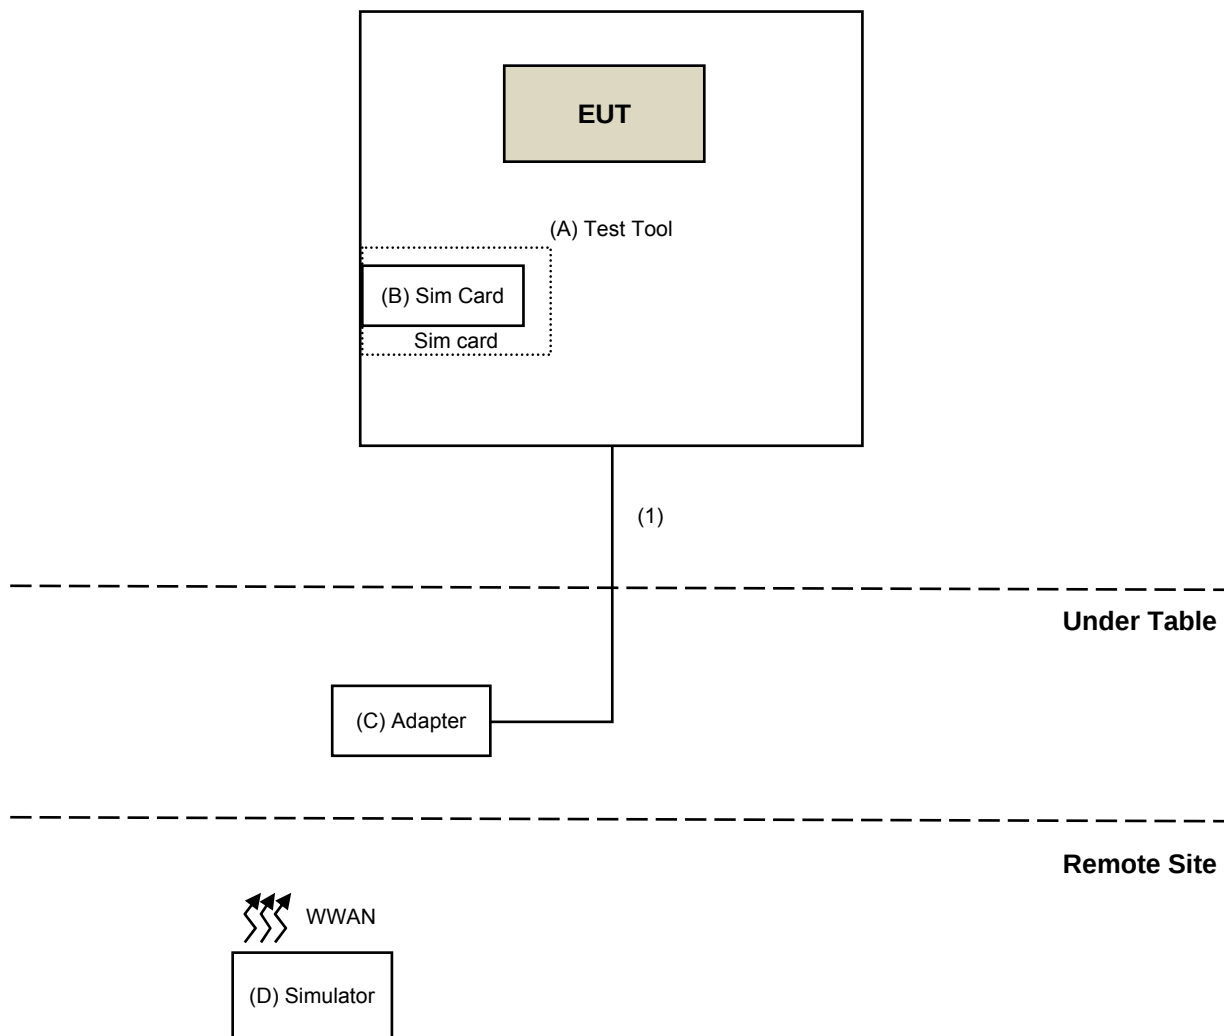

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Test Tool	WNC	NA	NA	NA	Supplied by client
B.	Sim Card	R&S	CRT-Z3	NA	NA	Provided by Lab
C.	Adapter	L.E.I	MU24-Y120200-A1	NA	NA	Supplied by client
D.	Simulator	R&S	CMU200	121040	NA	Provided by Lab (for WCDMA)
	Simulator	Keysight	E7515A	MY55340229	NA	Provided by Lab (for LTE)

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC Cable	1	1.5	No	0	Supplied by client

3.3 Test Mode Applicability and Tested Channel Detail

WCDMA B2

Test Item	Available Channel	Tested Channel	Mode
EIRP	9262 to 9538	9262, 9400, 9538	WCDMA
Frequency Stability	9262 to 9538	9400	WCDMA
Occupied Bandwidth	9262 to 9538	9262, 9400, 9538	WCDMA
Band Edge	9262 to 9538	9262, 9538	WCDMA
Peak to Average Ratio	9262 to 9538	9262, 9400, 9538	WCDMA
Conducted Emission	9262 to 9538	9262, 9400, 9538	WCDMA
Radiated Emission Below 1GHz	9262 to 9538	9262, 9400, 9538	WCDMA
Radiated Emission Above 1GHz	9262 to 9538	9262, 9400, 9538	WCDMA

LTE Band 2

TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
EIRP	18607 to 19193	18607, 18900 19193	1.4MHz	QPSK/16QAM	1RB / 0 RB offset
	18615 to 19185	18615, 18900, 19185	3MHz	QPSK/16QAM	1RB / 0 RB offset
	18625 to 19175	18625, 18900, 19175	5MHz	QPSK/16QAM	1RB / 0 RB offset
	18650 to 19150	18650, 18900, 19150	10MHz	QPSK/16QAM	1RB / 0 RB offset
	18675 to 19125	18675, 18900, 19125	15MHz	QPSK/16QAM	1RB / 0 RB offset
	18700 to 19100	18700, 18900, 19100	20MHz	QPSK/16QAM	1RB / 0 RB offset
Frequency Stability	18607 to 19193	18900	1.4MHz	QPSK	-
	18615 to 19185	18900	3MHz	QPSK	-
	18625 to 19175	18900	5MHz	QPSK	-
	18650 to 19150	18900	10MHz	QPSK	-
	18675 to 19125	18900	15MHz	QPSK	-
	18700 to 19100	18900	20MHz	QPSK	-
Occupied Bandwidth	18607 to 19193	18607, 18900 19193	1.4MHz	QPSK/16QAM	Full RB
	18615 to 19185	18615, 18900, 19185	3MHz	QPSK/16QAM	Full RB
	18625 to 19175	18625, 18900, 19175	5MHz	QPSK/16QAM	Full RB
	18650 to 19150	18650, 18900, 19150	10MHz	QPSK/16QAM	Full RB
	18675 to 19125	18675, 18900, 19125	15MHz	QPSK/16QAM	Full RB
	18700 to 19100	18700, 18900, 19100	20MHz	QPSK/16QAM	Full RB
Peak to Average Ratio	18607 to 19193	18607, 18900 19193	1.4MHz	QPSK/16QAM	Full RB
	18615 to 19185	18615, 18900, 19185	3MHz	QPSK/16QAM	Full RB
	18625 to 19175	18625, 18900, 19175	5MHz	QPSK/16QAM	Full RB
	18650 to 19150	18650, 18900, 19150	10MHz	QPSK/16QAM	Full RB
	18675 to 19125	18675, 18900, 19125	15MHz	QPSK/16QAM	Full RB
	18700 to 19100	18700, 18900, 19100	20MHz	QPSK/16QAM	Full RB

Band Edge	18607 to 19193	18607	1.4MHz	QPSK	1 RB / 0 RB Offset
		19193			1 RB / 5 RB Offset
		18607, 19193			6 RB / 0 RB Offset
	18615 to 19185	18615	3MHz	QPSK	1 RB / 0 RB Offset
		19185			1 RB / 14 RB Offset
		18615, 19185			15 RB / 0 RB Offset
	18625 to 19175	18625,	5MHz	QPSK	1 RB / 0 RB Offset
		19175			1 RB / 24 RB Offset
		18625, 19175			25 RB / 0 RB Offset
	18650 to 19150	18650	10MHz	QPSK	1 RB / 0 RB Offset
		19150			1 RB / 49 RB Offset
		18650, 19150			50 RB / 0 RB Offset
	18675 to 19125	18675,	15MHz	QPSK	1 RB / 0 RB Offset
		19125			1 RB / 74 RB Offset
		18675, 19125			75 RB / 0 RB Offset
	18700 to 19100	18700.	20MHz	QPSK	1 RB / 0 RB Offset
		19100			1 RB / 99 RB Offset
		18700. 19100			100 RB / 0 RB Offset
Conducted Emission	18607 to 19193	18607, 18900 19193	1.4MHz	QPSK	1 RB / 0 RB Offset
	18615 to 19185	18615, 18900, 19185	3MHz	QPSK	1 RB / 0 RB Offset
	18625 to 19175	18625, 18900, 19175	5MHz	QPSK	1 RB / 0 RB Offset
	18650 to 19150	18650, 18900, 19150	10MHz	QPSK	1 RB / 0 RB Offset
	18675 to 19125	18675, 18900, 19125	15MHz	QPSK	1 RB / 0 RB Offset
	18700 to 19100	18700, 18900, 19100	20MHz	QPSK	1 RB / 0 RB Offset
Radiated Emission	18607 to 19193	18607, 18900 19193	1.4MHz	QPSK	1 RB / 0 RB Offset
	18615 to 19185	18615, 18900, 19185	3MHz	QPSK	1 RB / 0 RB Offset
	18625 to 19175	18625, 18900, 19175	5MHz	QPSK	1 RB / 0 RB Offset
	18650 to 19150	18650, 18900, 19150	10MHz	QPSK	1 RB / 0 RB Offset
	18675 to 19125	18675, 18900, 19125	15MHz	QPSK	1 RB / 0 RB Offset
	18700 to 19100	18700, 18900, 19100	20MHz	QPSK	1 RB / 0 RB Offset

NOTE:

All supported modulation types were evaluated. The Worst case of QPSK was selected. Therefore, the Band Edge, Frequency Stability, Condcudeted Emission and Radiated Emission were presented under QPSK mode only.

Test Condition:

Test Item	Environmental Conditions	Input Power (System)	Tested By
EIRP	25deg. C, 60%RH	120Vac, 60Hz	Jyunchun Lin
Frequency Stability	25deg. C, 60%RH	120Vac, 60Hz	Jyunchun Lin
Occupied Bandwidth	25deg. C, 60%RH	120Vac, 60Hz	Jyunchun Lin
Band Edge	25deg. C, 60%RH	120Vac, 60Hz	Jyunchun Lin
Peak to Average Ratio	25deg. C, 60%RH	120Vac, 60Hz	Jyunchun Lin
Condcudeted Emission	25deg. C, 60%RH	120Vac, 60Hz	Jyunchun Lin
Radiated Emission Below 1GHz	24deg. C, 73%RH, 24deg. C, 76%RH	120Vac, 60Hz	Andy Ho
Radiated Emission Above 1GHz	24deg. C, 73%RH	120Vac, 60Hz	Andy Ho

3.4 EUT Operating Conditions

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 24 Subpart E

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-E 2016

ANSI 63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 2 watts e.i.r.p.

4.1.2 Test Procedures


Conducted Power Measurement:

The EUT was set up for the maximum power with WCDMA/LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and difference RB size/ RB offset for difference bandwidth record the power level shown on power meter.

EIRP Measurement:

- a. $EIRP = \text{Conducted Output power level} + \text{Antenna gain}.$

4.1.3 Test Setup

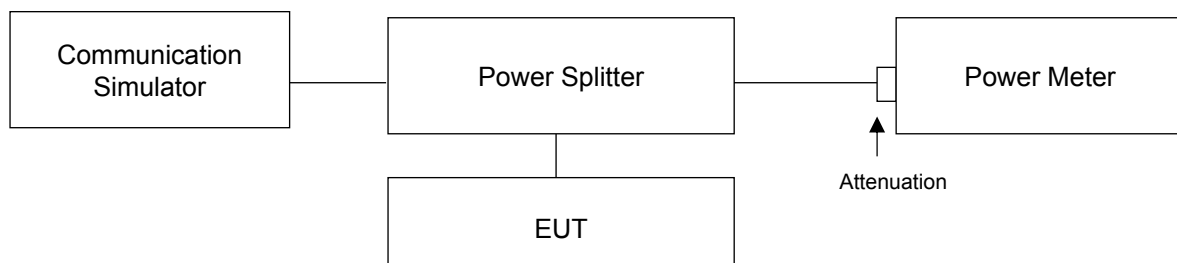

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.4 Test Results

CONDUCTED OUTPUT POWER (dBm)

WCDMA B2

Band	WCDMA B2		
Channel	9262	9400	9538
Frequency (MHz)	1852.4	1880.0	1907.6
RMC	24.53	24.38	24.48
HSDPA Subtest-1	24.11	24.09	24.05
HSDPA Subtest-2	24.03	24.08	24.10
HSDPA Subtest-3	23.99	24.05	24.03
HSDPA Subtest-4	23.95	24.01	23.98
HSUPA Subtest-1	23.85	23.81	23.77
HSUPA Subtest-2	23.81	23.85	23.74
HSUPA Subtest-3	23.75	23.79	23.71
HSUPA Subtest-4	23.77	23.80	23.76
HSUPA Subtest-5	23.80	23.75	23.75

LTE Band 2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			18607	18900	19193		18607	18900	19193	
			1850.7	1880	1909.3		1850.7	1880	1909.3	
			MHz	MHz	MHz		MHz	MHz	MHz	
2 / 1.4M	1	0	22.08	22.46	22.91	0	20.72	21.56	21.88	1
	1	2	22.03	22.49	22.61	0	20.70	21.39	21.76	1
	1	5	21.89	22.43	22.79	0	20.47	21.52	21.54	1
	3	0	21.98	22.31	22.85	0	20.40	21.21	22.00	1
	3	1	21.92	22.35	21.95	0	20.84	21.33	21.91	1
	3	3	21.90	22.33	22.67	0	20.92	21.43	21.86	1
	6	0	20.85	21.47	21.05	1	19.89	19.75	19.81	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			18615	18900	19185		18615	18900	19185	
			1851.5	1880	1908.5		1851.5	1880	1908.5	
			MHz	MHz	MHz		MHz	MHz	MHz	
2 / 3M	1	0	22.37	22.48	22.97	0	20.88	21.03	21.39	1
	1	7	21.87	22.39	22.76	0	21.39	21.32	21.28	1
	1	14	21.97	22.37	21.94	0	21.51	20.95	21.21	1
	8	0	20.98	21.38	21.76	1	19.86	20.07	20.80	2
	8	3	20.90	21.42	21.79	1	19.90	20.06	20.60	2
	8	7	20.95	21.40	21.81	1	19.76	20.09	20.48	2
	15	0	20.96	21.39	21.86	1	19.80	20.95	20.84	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			18625	18900	19175		18625	18900	19175	
			1852.5	1880	1907.5		1852.5	1880	1907.5	
			MHz	MHz	MHz		MHz	MHz	MHz	
2 / 5M	1	0	22.73	22.51	22.52	0	19.88	21.30	21.35	1
	1	12	21.89	22.38	22.26	0	20.85	21.21	21.44	1
	1	24	22.08	21.38	22.36	0	20.92	21.39	21.21	1
	12	0	20.99	21.24	21.40	1	20.97	20.42	20.65	2
	12	6	20.86	21.50	21.37	1	19.75	20.39	20.64	2
	12	13	21.02	21.42	21.56	1	19.87	20.38	20.57	2
	25	0	21.00	21.39	21.49	1	20.00	20.29	20.53	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			18650	18900	19150		18650	18900	19150	
			1855	1880	1905		1855	1880	1905	
			MHz	MHz	MHz		MHz	MHz	MHz	
2 / 10M	1	0	22.73	22.65	22.83	0	21.40	21.39	21.28	1
	1	24	22.69	22.53	22.62	0	21.91	21.35	21.65	1
	1	49	22.13	22.50	21.68	0	20.89	21.11	21.38	1
	25	0	21.14	21.58	21.74	1	20.04	20.46	20.55	2
	25	12	21.21	21.41	21.69	1	20.17	20.35	20.65	2
	25	25	21.21	21.46	21.59	1	20.02	20.35	20.40	2
	50	0	21.17	21.51	21.63	1	19.96	20.35	20.46	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			18675	18900	19125		18675	18900	19125	
			1857.5	1880	1902.5		1857.5	1880	1902.5	
			MHz	MHz	MHz		MHz	MHz	MHz	
2 / 15M	1	0	22.39	22.27	22.91	0	20.11	21.14	21.23	1
	1	37	22.49	22.53	22.71	0	21.06	21.58	22.15	1
	1	74	22.38	22.44	22.69	0	21.00	21.62	21.61	1
	36	0	21.12	21.26	21.68	1	20.11	20.10	20.55	2
	36	19	21.20	21.44	21.55	1	20.18	20.28	20.66	2
	36	39	21.16	21.54	21.63	1	20.04	20.17	20.71	2
	75	0	21.24	21.39	21.64	1	20.69	20.33	20.60	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			18700	18900	19100		18700	18900	19100	
			1860	1880	1900		1860	1880	1900	
			MHz	MHz	MHz		MHz	MHz	MHz	
2 / 20M	1	0	22.71	22.43	22.67	0	20.23	20.87	21.52	1
	1	50	22.46	22.55	22.19	0	20.10	21.23	21.43	1
	1	99	21.97	22.55	21.59	0	20.92	21.39	21.20	1
	50	0	21.04	21.30	21.55	1	20.42	20.22	20.66	2
	50	25	21.17	21.46	21.61	1	20.58	20.40	20.63	2
	50	50	21.13	21.43	21.55	1	20.01	20.34	20.65	2
	100	0	21.12	21.29	21.43	1	20.00	20.30	20.55	2

EIRP POWER

WCDMA B2

Band	WCDMA B2		
Channel	9262	9400	9538
Frequency (MHz)	1852.4	1880	1907.6
RMC 12.2K	24.53	24.38	24.48
Gain (dBi)	1.56	1.56	1.56
Max EIRP Power (dBm)	26.09	25.94	26.04

LTE Band 2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			18607	18900	19193		18607	18900	19193	
			1850.7	1880	1909.3		1850.7	1880	1909.3	
2 / 1.4M	1	0	MHz	MHz	MHz	0	MHz	MHz	MHz	1
			22.08	22.46	22.91		20.72	21.56	21.88	
Gain (dBi)			1.56	1.56	1.56		1.56	1.56	1.56	
Max EIRP Power (dBm)			23.64	24.02	24.47		22.28	23.12	23.44	

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			18615	18900	19185		18615	18900	19185	
			1851.5	1880	1908.5		1851.5	1880	1908.5	
2 / 3M	1	0	MHz	MHz	MHz	0	MHz	MHz	MHz	1
			22.37	22.48	22.97		20.88	21.03	21.39	
Gain (dBi)			1.56	1.56	1.56		1.56	1.56	1.56	
Max EIRP Power (dBm)			23.93	24.04	24.53		22.44	22.59	22.95	

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			18625	18900	19175		18625	18900	19175	
			1852.5	1880	1907.5		1852.5	1880	1907.5	
2 / 5M	1	0	MHz	MHz	MHz	0	MHz	MHz	MHz	1
			22.73	22.51	22.52		19.88	21.30	21.35	
Gain (dBi)			1.56	1.56	1.56		1.56	1.56	1.56	
Max EIRP Power (dBm)			24.29	24.07	24.08		21.44	22.86	22.91	

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			18650	18900	19150		20000	20175	20350	
			1855	1880	1905		1715	1732.5	1750	
2 / 10M	1	0	MHz	MHz	MHz	0	MHz	MHz	MHz	1
			22.73	22.65	22.83		21.40	21.39	21.28	
Gain (dBi)			1.56	1.56	1.56		1.56	1.56	1.56	
Max EIRP Power (dBm)			24.29	24.21	24.39		22.96	22.95	22.84	

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			18675	18900	19125		18675	18900	19125	
			1857.5	1880	1902.5		1857.5	1880	1902.5	
			MHz	MHz	MHz		MHz	MHz	MHz	
2 / 15M	1	0	22.39	22.27	22.91	0	20.11	21.14	21.23	1
Gain (dBi)			1.56	1.56	1.56		1.56	1.56	1.56	
Max EIRP Power (dBm)			23.95	23.83	24.47		21.67	22.70	22.79	

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			18700	18900	19100		18700	18900	19100	
			1860	1880	1900		1860	1880	1900	
			MHz	MHz	MHz		MHz	MHz	MHz	
2 / 20M	1	0	22.71	22.43	22.67	0	20.23	20.87	21.52	1
Gain (dBi)			1.56	1.56	1.56		1.56	1.56	1.56	
Max EIRP Power (dBm)			24.27	23.99	24.23		21.79	22.43	23.08	

4.2 Modulation Characteristics Measurement

4.2.1 Limits of Modulation Characteristics

N/A

4.2.2 Test Procedure


Connect the EUT to Communication Simulator via the antenna connector. The frequency band is set as EUT supported Modulation and Channels, the EUT output is matched with 50 ohm load, the waveform quality and constellation of the EUT was tested.

4.2.3 Test Setup




4.2.4 Test Results

WCDMA B2

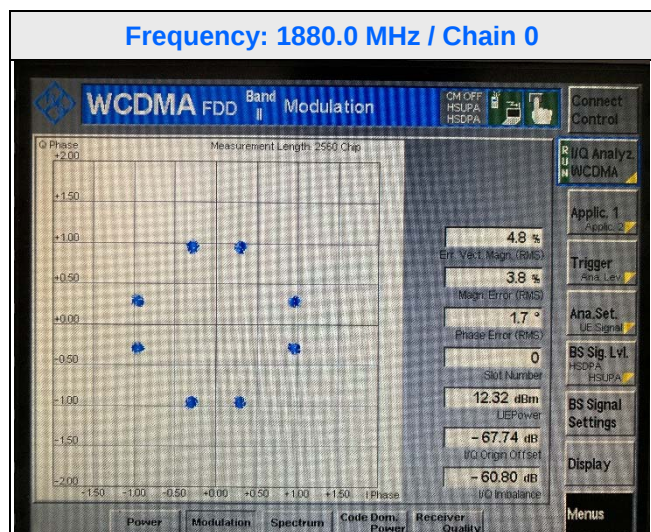

LTE Band 2

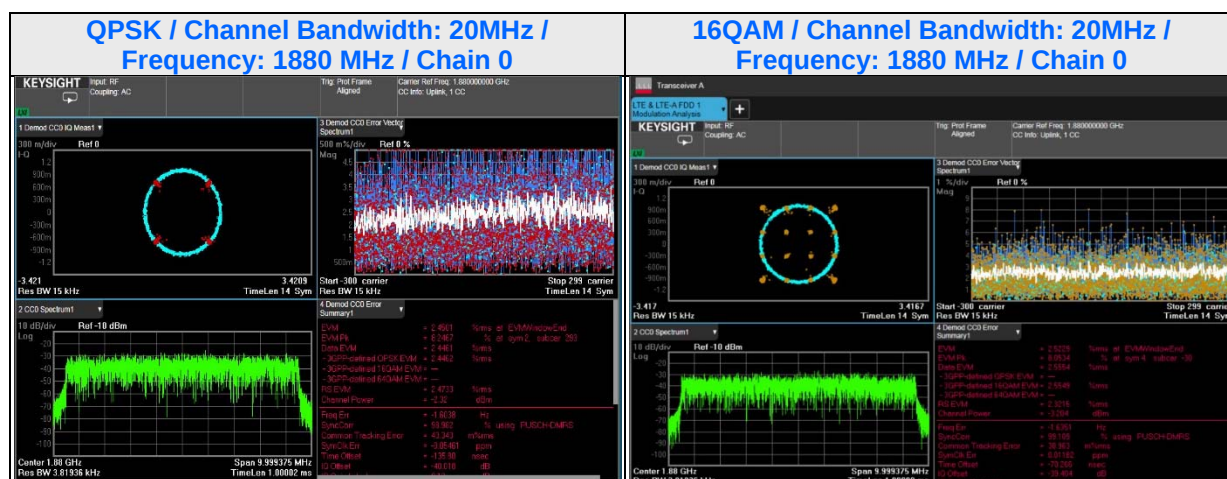

4.3 Frequency Stability Measurement

4.3.1 Limits of Frequency Stability Measurement


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

4.3.2 Test Procedure

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.3.3 Test Setup

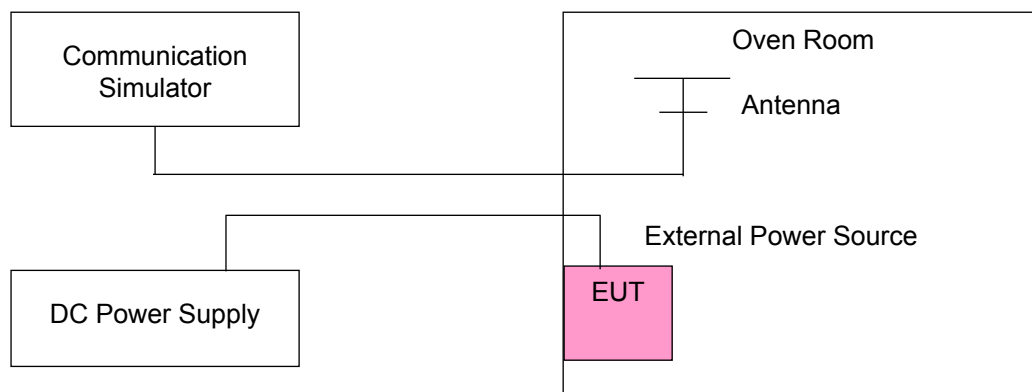

4.3.4 Test Results

WCDMA B2

Frequency Error vs. Voltage

Voltage (Volts)	Frequency Error (MHz)		Limit (MHz)	
	WCDMA B2		Low Edge	High Edge
	Low	High		
3.23	1850.35	1909.62	1850	1910
4.37	1850.32	1909.77	1850	1910

Frequency Error vs. Temperature.

TEMP. (°C)	Frequency Error (MHz)		Limit (MHz)	
	WCDMA B2		Low Edge	High Edge
	Low	High		
60	1850.36	1909.69	1850	1910
50	1850.41	1909.68	1850	1910
40	1850.24	1909.70	1850	1910
30	1850.39	1909.69	1850	1910
20	1850.33	1909.69	1850	1910
10	1850.33	1909.69	1850	1910
0	1850.40	1909.70	1850	1910
-10	1850.24	1909.70	1850	1910
-20	1850.28	1909.69	1850	1910
-30	1850.39	1909.69	1850	1910

LTE Band 2

Frequency Error vs. Voltage

Voltage (Volts)	Frequency Error (MHz)												Limit (MHz)	
	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz		Limit (MHz)	
	Low	High	Low	High	Low	High	Low	High	Low	High	Low	High	Low Edge	High Edge
3.23	1850.164	1909.721	1850.177	1909.766	1850.329	1909.811	1850.429	1909.459	1850.759	1909.421	1851.080	1909.039	1850	1910
4.37	1850.162	1909.721	1850.178	1909.764	1850.331	1909.810	1850.430	1909.459	1850.760	1909.420	1851.079	1909.039	1850	1910

Frequency Error vs. Temperature

Temp. (°C)	Frequency Error (MHz)												Limit (MHz)	
	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz		Limit (MHz)	
	Low	High	Low	High	Low	High	Low	High	Low	High	Low	High	Low Edge	High Edge
60	1850.163	1909.721	1850.176	1909.765	1850.329	1909.809	1850.430	1909.460	1850.761	1909.420	1851.081	1909.040	1850	1910
50	1850.164	1909.721	1850.177	1909.765	1850.330	1909.810	1850.431	1909.459	1850.759	1909.419	1851.081	1909.040	1850	1910
40	1850.164	1909.722	1850.176	1909.765	1850.331	1909.810	1850.431	1909.459	1850.759	1909.421	1851.079	1909.040	1850	1910
30	1850.164	1909.721	1850.178	1909.764	1850.329	1909.811	1850.429	1909.459	1850.761	1909.419	1851.079	1909.040	1850	1910
20	1850.163	1909.722	1850.177	1909.765	1850.330	1909.810	1850.430	1909.460	1850.760	1909.420	1851.080	1909.040	1850	1910
10	1850.164	1909.722	1850.177	1909.765	1850.330	1909.811	1850.429	1909.459	1850.759	1909.419	1851.080	1909.041	1850	1910
0	1850.164	1909.721	1850.177	1909.766	1850.331	1909.810	1850.430	1909.459	1850.759	1909.419	1851.080	1909.041	1850	1910
-10	1850.164	1909.721	1850.177	1909.765	1850.329	1909.810	1850.431	1909.460	1850.760	1909.421	1851.081	1909.040	1850	1910
-20	1850.163	1909.722	1850.178	1909.766	1850.329	1909.811	1850.430	1909.459	1850.760	1909.420	1851.079	1909.039	1850	1910
-30	1850.163	1909.723	1850.176	1909.765	1850.331	1909.811	1850.430	1909.460	1850.759	1909.420	1851.079	1909.040	1850	1910

4.4 Occupied Bandwidth Measurement

4.4.1 Test Procedure

All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. The bandwidth of the fundamental frequency was measured by spectrum analyzer with $RBW \geq 1\% \times OBW$ and $VBW \geq 3 \times VBW$.


Occupied Bandwidth Measurement:

Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

26 dB Bandwidth Measurement:


The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26dB below the transmitter power.

4.4.2 Test Setup

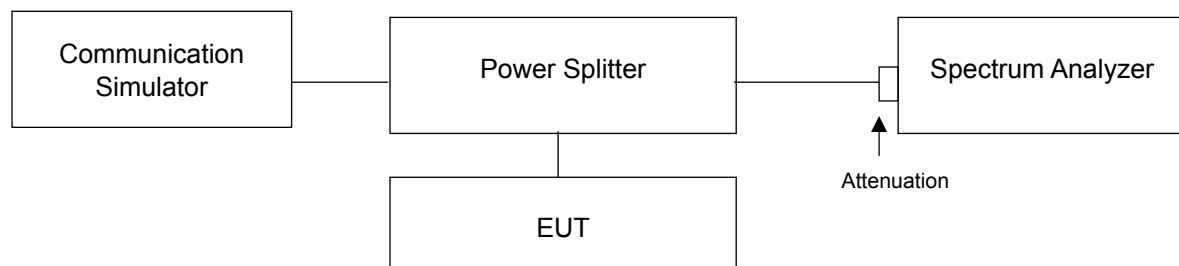

4.4.3 Test Result (-26dB Bandwidth)


Channel	Freq. (MHz)	-26dB Bandwidth (MHz)
		WCDMA B2
9262	1852.4	4.67
9400	1880.0	4.70
9538	1907.6	4.69

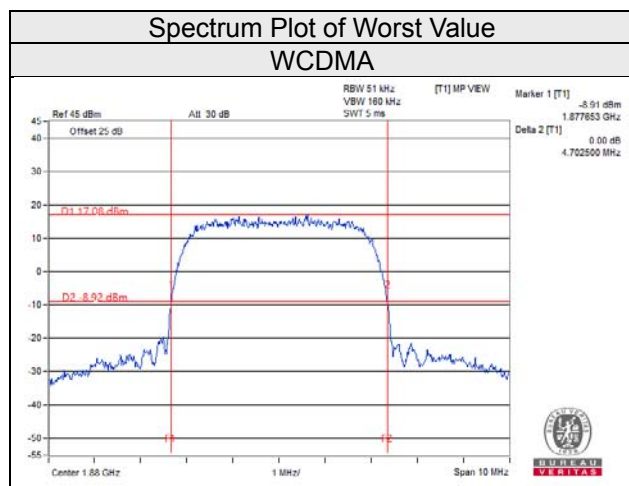


LTE Band 2							
Channel Bandwidth 1.4MHz				Channel Bandwidth 3MHz			
Channel	Frequency (MHz)	-26dB Bandwidth (MHz)		Channel	Frequency (MHz)	-26dB Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18607	1850.7	1.29	1.30	18615	1851.5	2.98	2.95
18900	1880	1.28	1.29	18900	1880	2.95	2.96
19193	1909.3	1.28	1.28	19185	1908.5	2.95	2.94
Channel Bandwidth 5MHz				Channel Bandwidth 10MHz			
Channel	Frequency (MHz)	-26dB Bandwidth (MHz)		Channel	Frequency (MHz)	-26dB Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18625	1852.5	5.00	5.01	18650	1855	9.88	9.88
18900	1880	4.98	4.98	18900	1880	9.88	9.89
19175	1907.5	4.98	4.98	19150	1905	9.93	9.90
Channel Bandwidth 15MHz				Channel Bandwidth 20MHz			
Channel	Frequency (MHz)	-26dB Bandwidth (MHz)		Channel	Frequency (MHz)	-26dB Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18675	1857.5	14.69	14.73	18700	1860	19.46	19.54
18900	1880	14.65	14.62	18900	1880	19.43	19.37
19125	1902.5	14.73	14.65	19100	1900	19.44	19.49

Spectrum Plot of Worst Value


1.4MHz / 16QAM

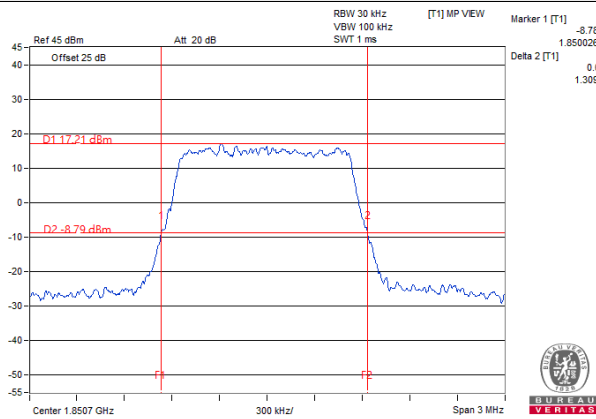


3MHz / QPSK

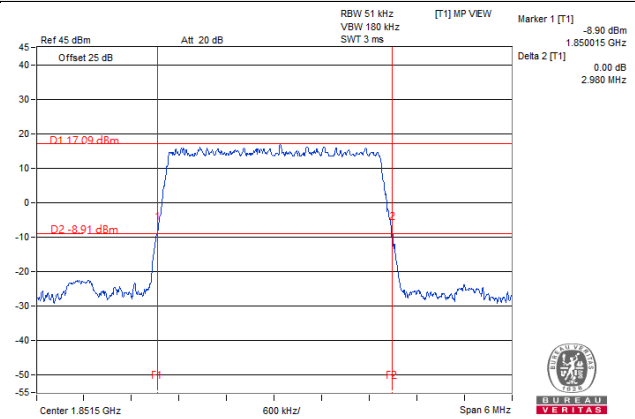


5MHz / 16QAM

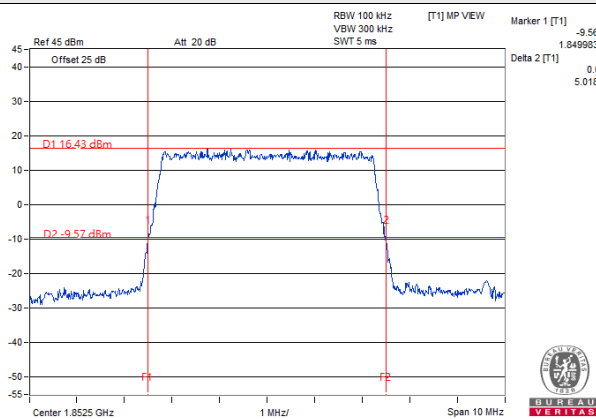


10MHz / QPSK

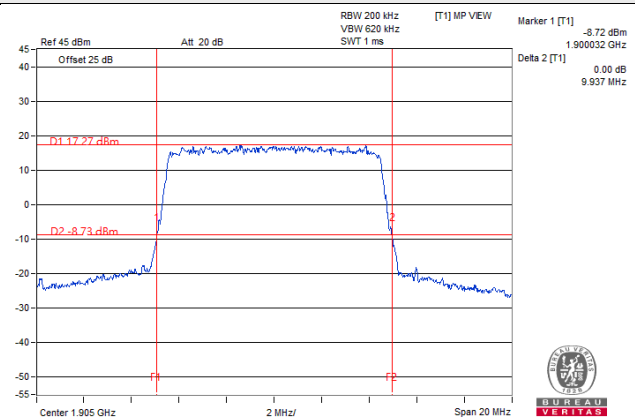

15MHz / QPSK

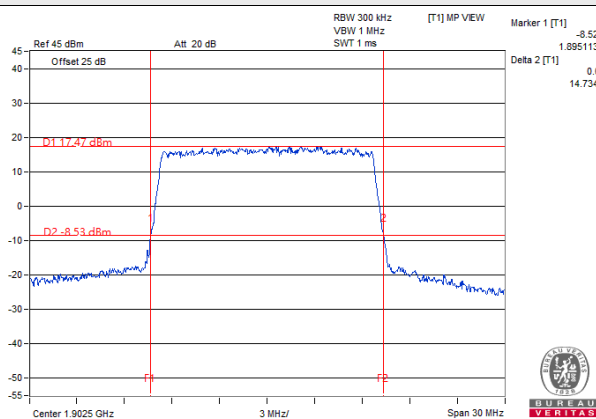


20MHz / 16QAM

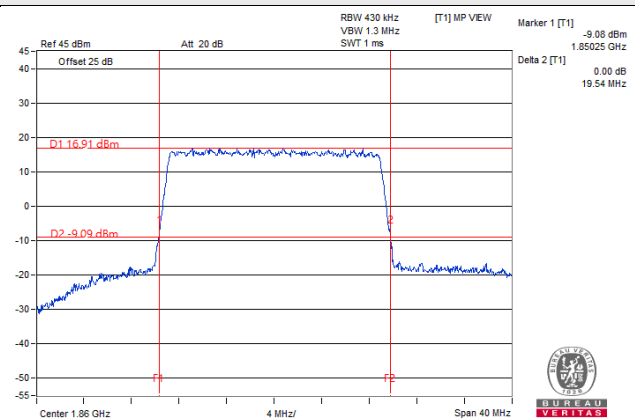

4.4.4 Test Result (Occupied Bandwidth)


Channel	Freq. (MHz)	99% Occupied Bandwidth (MHz)
		WCDMA B2
9262	1852.4	4.13
9400	1880.0	4.14
9538	1907.6	4.13

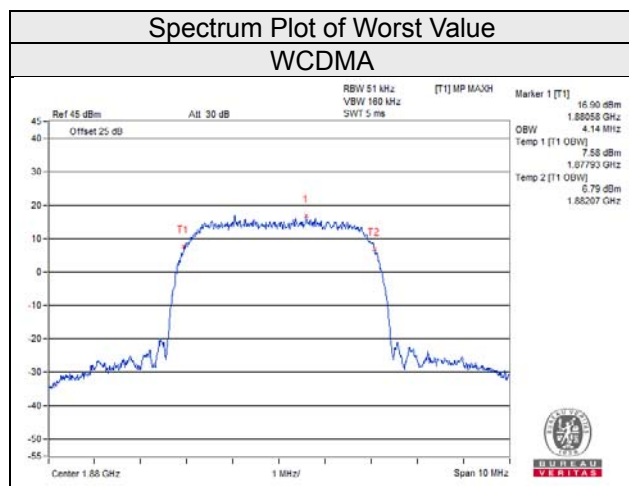


LTE Band 2							
Channel Bandwidth 1.4MHz				Channel Bandwidth 3MHz			
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18607	1850.7	1.09	1.09	18615	1851.5	2.70	2.68
18900	1880	1.09	1.09	18900	1880	2.70	2.68
19193	1909.3	1.09	1.09	19185	1908.5	2.70	2.68
Channel Bandwidth 5MHz				Channel Bandwidth 10MHz			
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18625	1852.5	4.50	4.51	18650	1855	8.98	8.98
18900	1880	4.51	4.51	18900	1880	8.98	8.98
19175	1907.5	4.50	4.50	19150	1905	8.96	9.00
Channel Bandwidth 15MHz				Channel Bandwidth 20MHz			
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18675	1857.5	13.47	13.44	18700	1860	18.00	17.92
18900	1880	13.44	13.41	18900	1880	17.96	17.84
19125	1902.5	13.47	13.44	19100	1900	17.96	17.88

Spectrum Plot of Worst Value


1.4MHz / QPSK

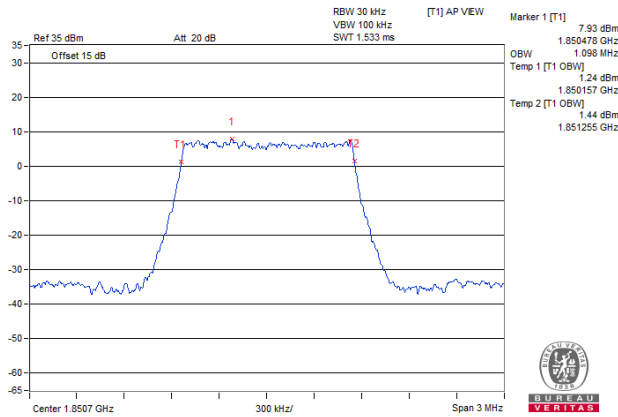


3MHz / QPSK

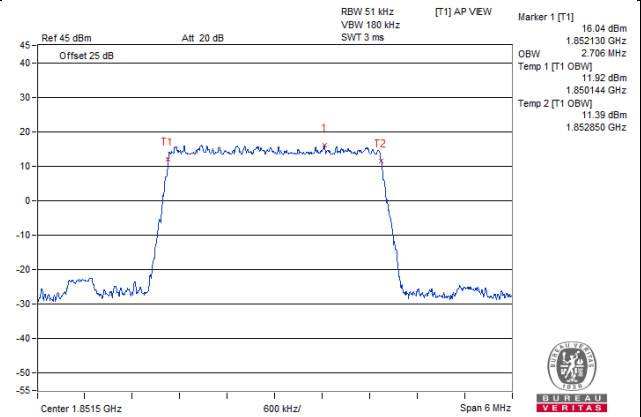


5MHz / QPSK

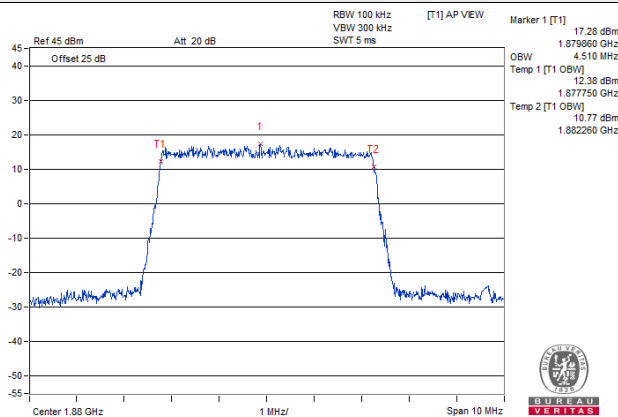


10MHz / 16QAM

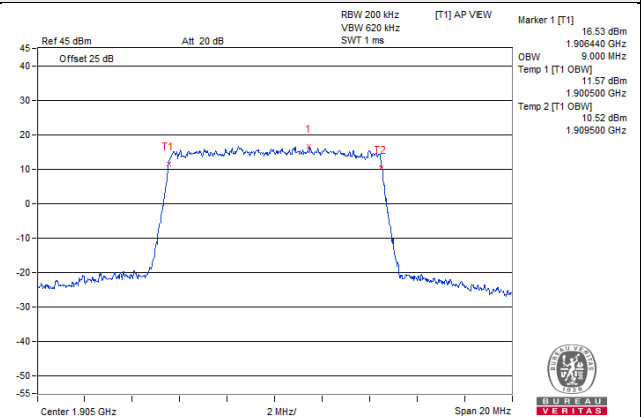

15MHz / QPSK

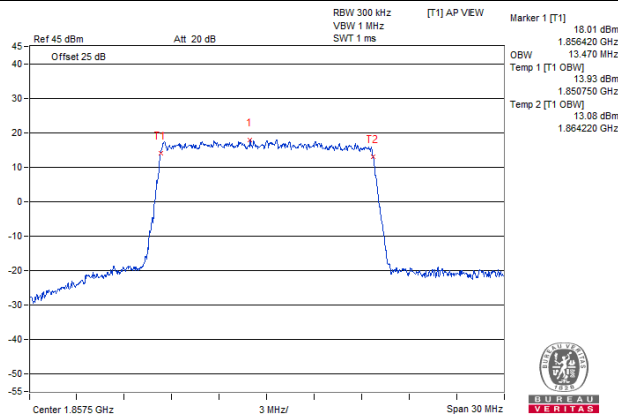

20MHz / QPSK

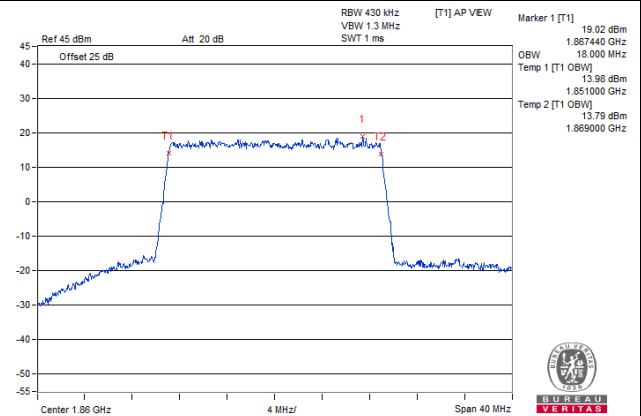


4.5 Band Edge Measurement

4.5.1 Limits of Band Edge Measurement

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.


4.5.2 Test Setup

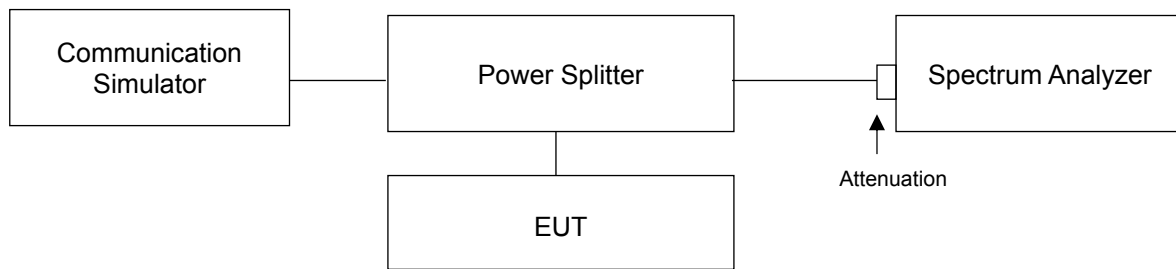

4.5.3 Test Procedures

- All measurements were done at low and high operational frequency range.
- The center frequency of spectrum is the band edge frequency and RB of the spectrum is $>1\%$ emission bandwidth and VB of the spectrum is $\geq 3 \cdot RB$.
- Record the max trace plot into the test report.


4.5.4 Test Results

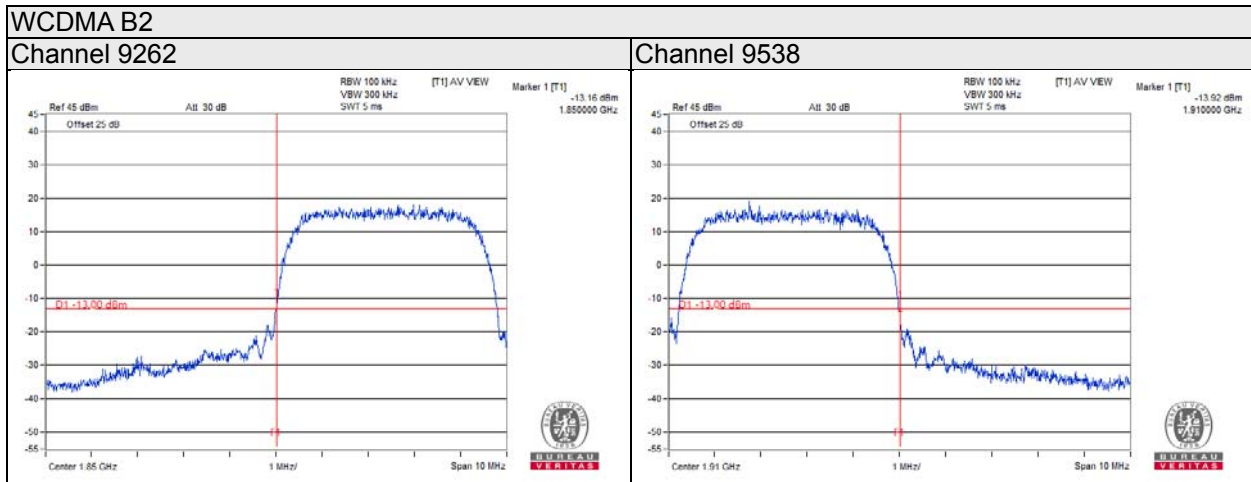

LTE Band 2 Channel Bandwidth: 1.4MHz


Channel 18607

1 RB

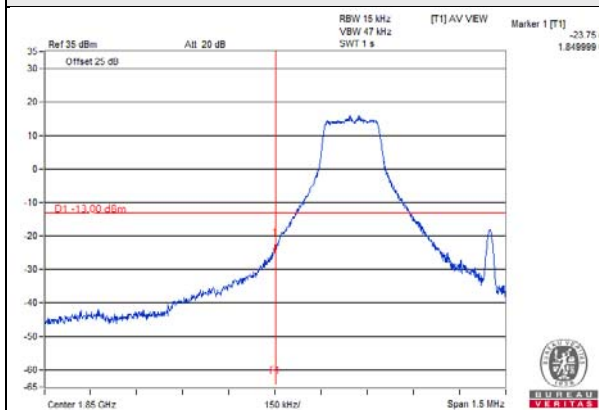


Channel 19193


1 RB

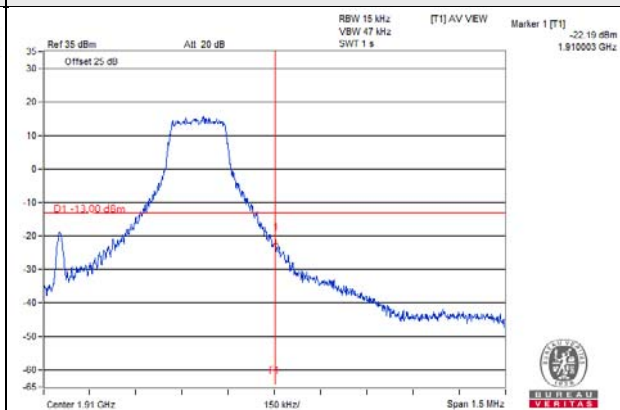

6 RB

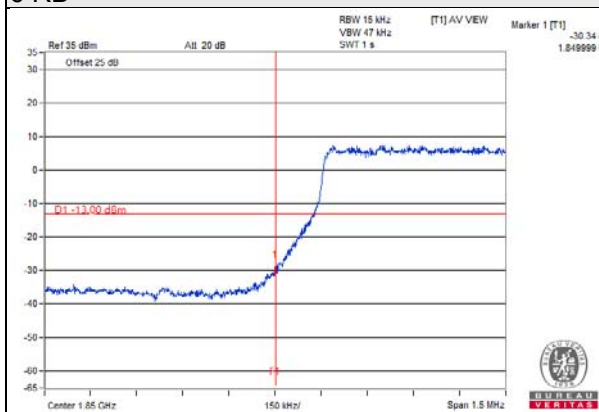


6 RB

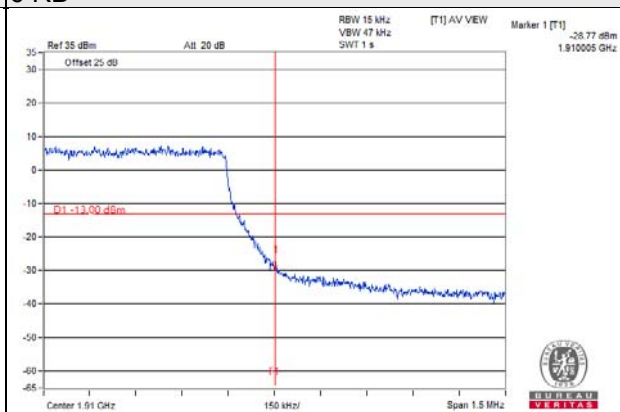

LTE Band 2 Channel Bandwidth: 3MHz


Channel 18615

1 RB

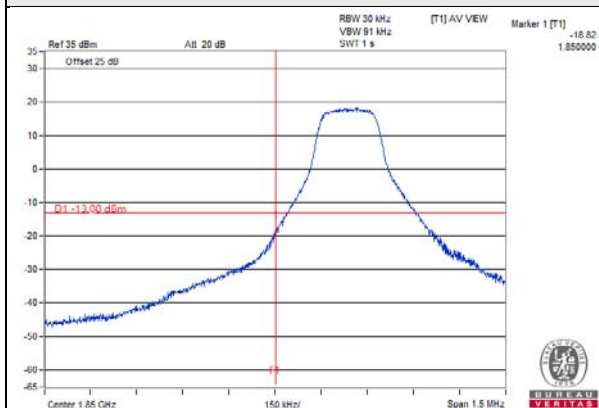


Channel 19185


1 RB

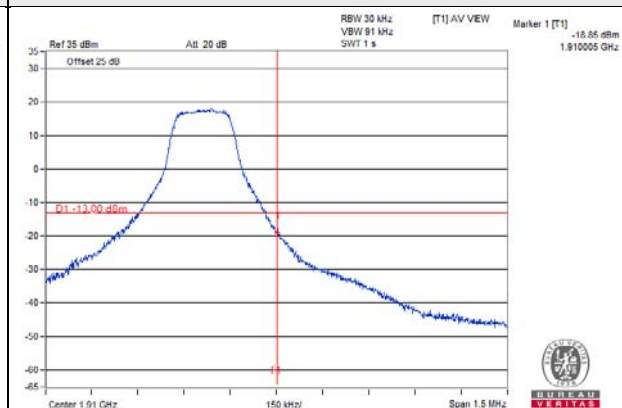

15 RB

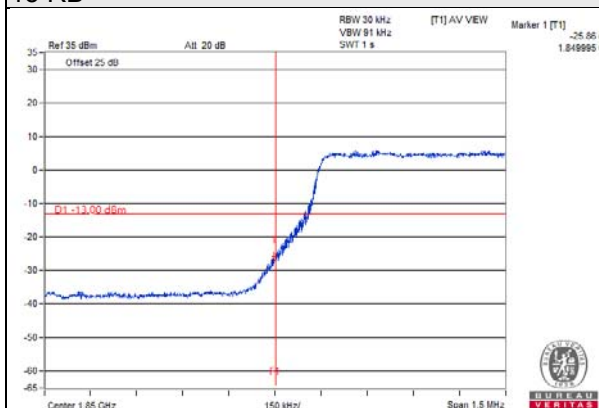


15 RB

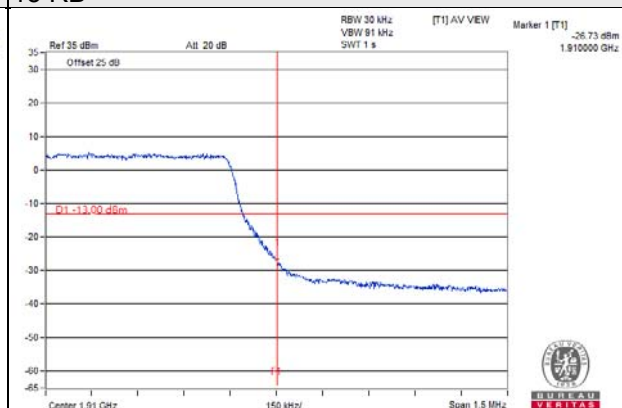

LTE Band 2 Channel Bandwidth: 5MHz


Channel 18625

1 RB

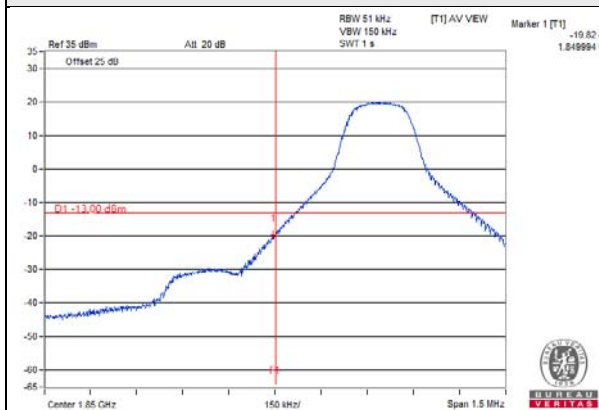


Channel 19175


1 RB

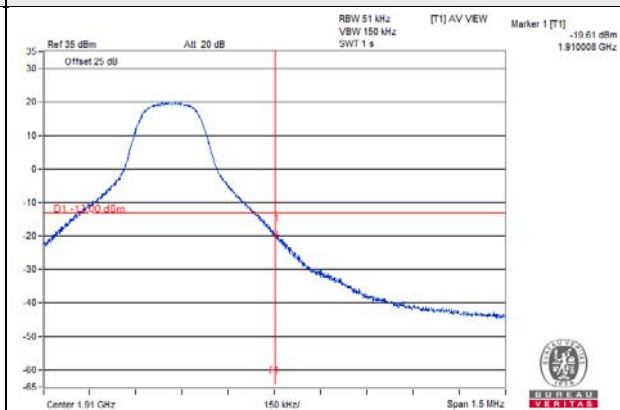

25 RB

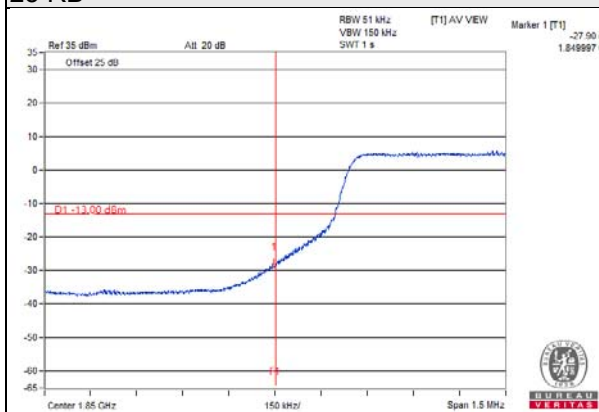


25 RB

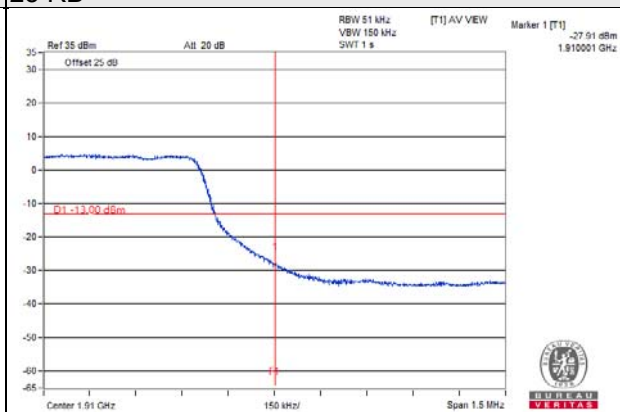

LTE Band 2 Channel Bandwidth: 10MHz


Channel 18650

1 RB

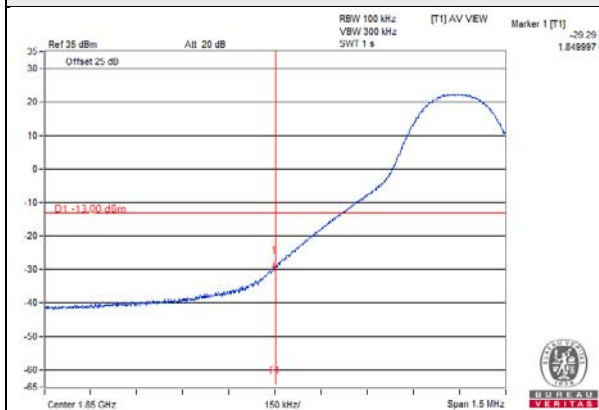


Channel 19150


1 RB

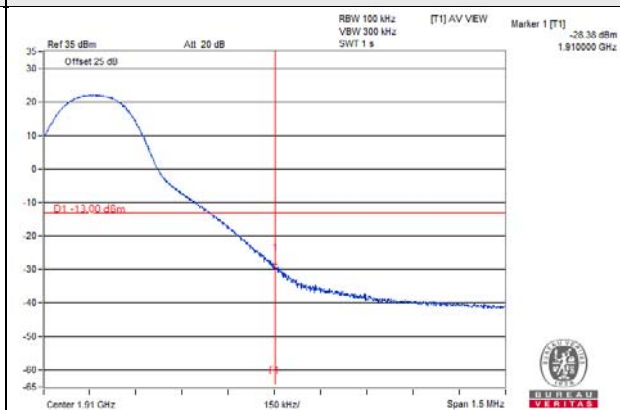

50 RB

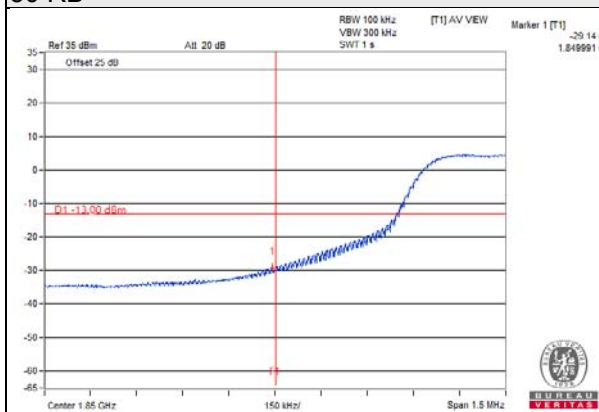


50 RB

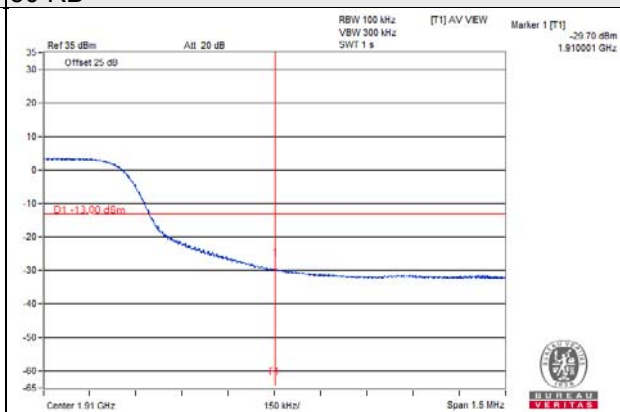

LTE Band 2 Channel Bandwidth: 15MHz


Channel 18675

1 RB

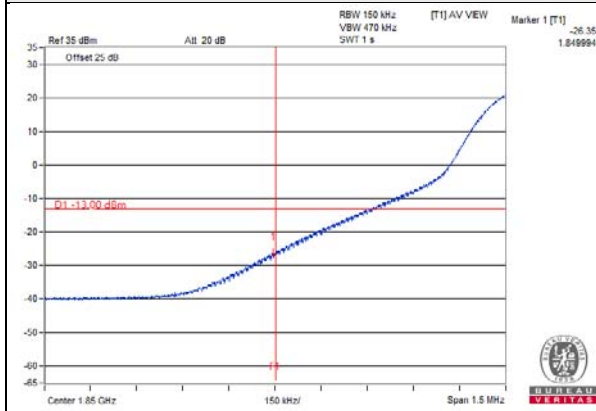


Channel 19125


1 RB

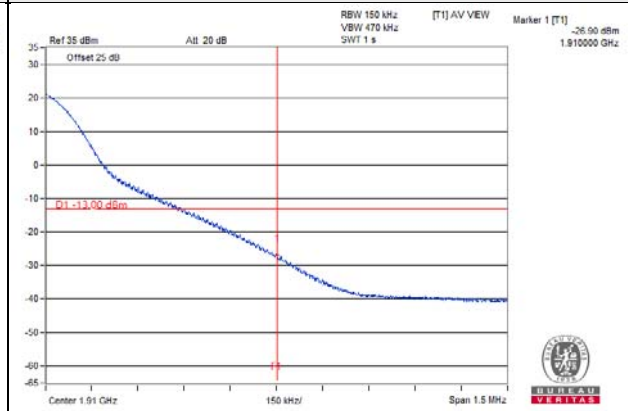

75 RB

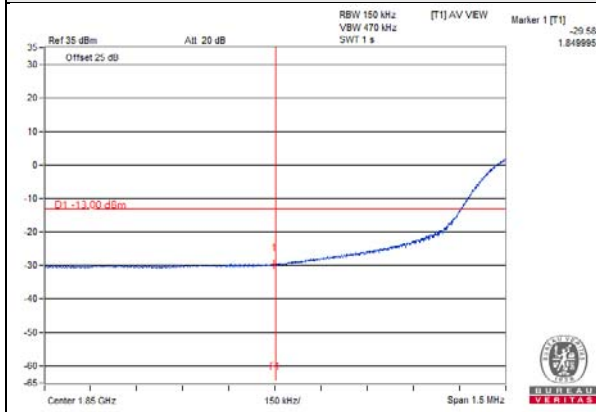


75 RB

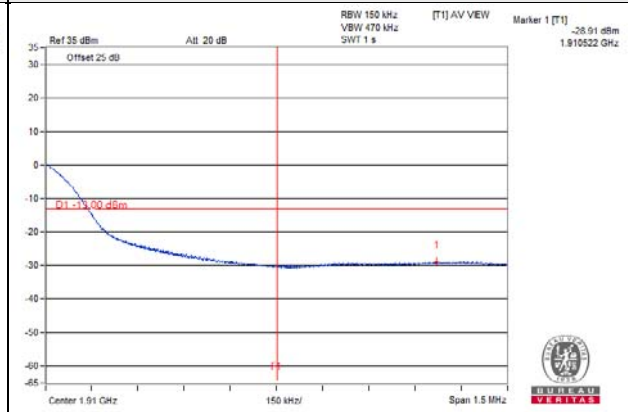

LTE Band 2 Channel Bandwidth: 20MHz


Channel 18700

1 RB

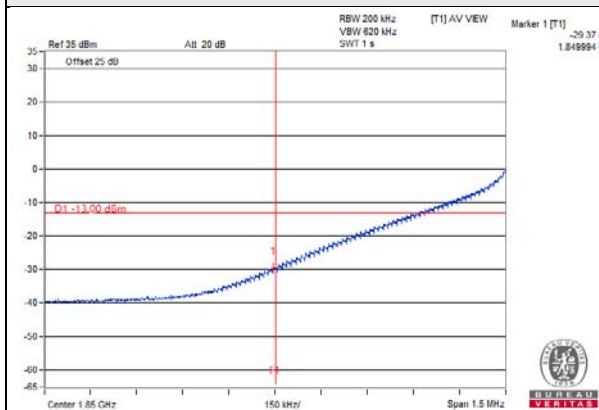


Channel 19100


1 RB

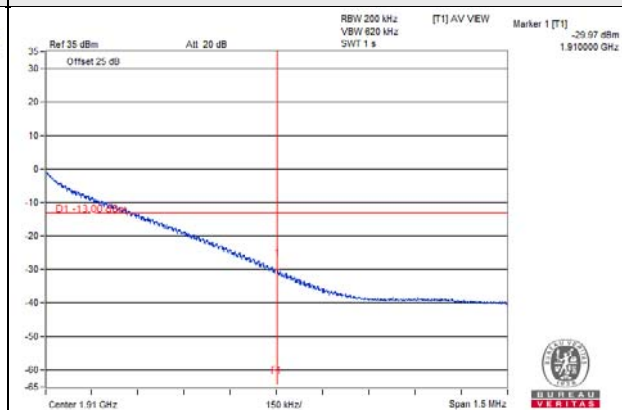

100 RB

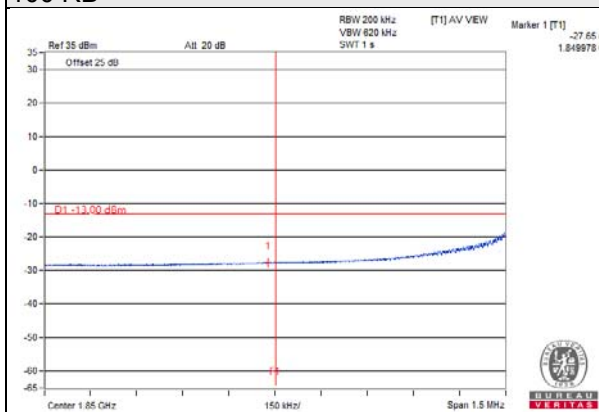

100 RB

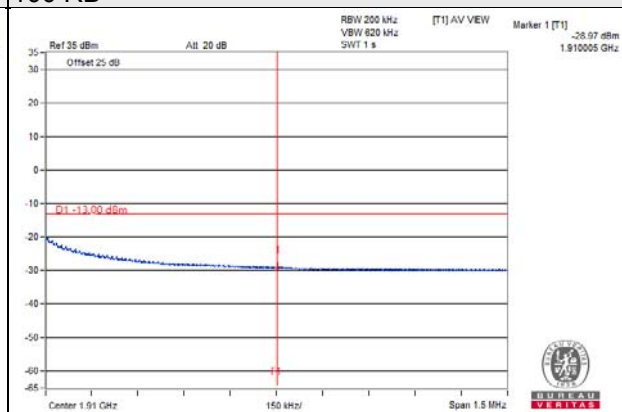


4.6 Peak to Average Ratio

4.5.1 Limits of Peak to Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

4.5.2 Test Setup

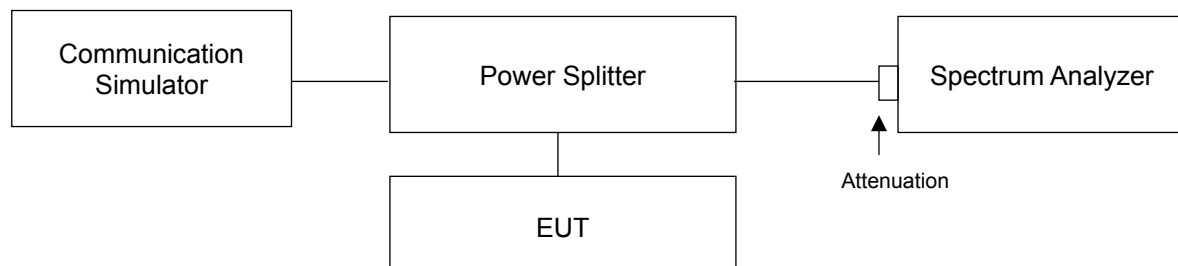


4.5.3 Test Procedures

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.

4.5.4 Test Results

Channel	Freq. (MHz)	Peak to Average Ratio (dB)
		WCDMA B2
9262	1852.4	2.91
9400	1880	2.94
9538	1907.6	3.08

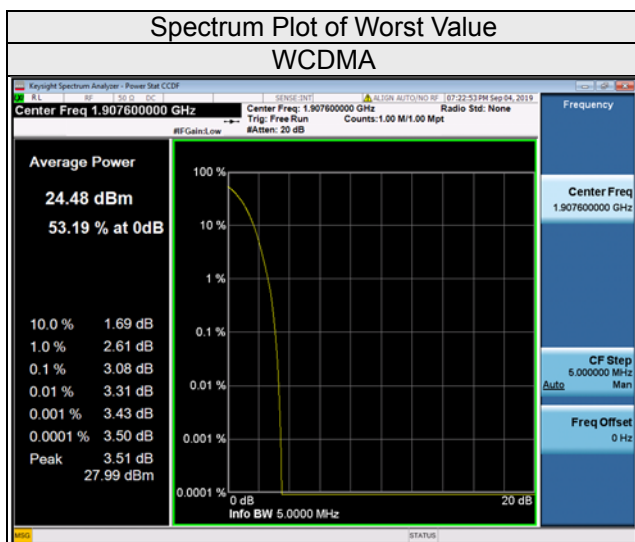

LTE Band 2							
Channel Bandwidth 1.4MHz				Channel Bandwidth 3MHz			
Channel	Frequency (MHz)	Peak To Average Ratio (dB)		Channel	Frequency (MHz)	Peak To Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
18607	1850.7	5.11	5.91	18615	1851.5	5.12	5.99
18900	1880	5.25	6.07	18900	1880	5.28	6.17
19193	1909.3	5.41	6.23	19185	1908.5	5.46	6.39
Channel Bandwidth 5MHz				Channel Bandwidth 10MHz			
Channel	Frequency (MHz)	Peak To Average Ratio (dB)		Channel	Frequency (MHz)	Peak To Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
18625	1852.5	5.20	6.04	18650	1855	5.21	6.11
18900	1880	5.30	6.17	18900	1880	5.26	6.10
19175	1907.5	5.43	6.38	19150	1905	5.4	6.38
Channel Bandwidth 15MHz				Channel Bandwidth 20MHz			
Channel	Frequency (MHz)	Peak To Average Ratio (dB)		Channel	Frequency (MHz)	Peak To Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
18675	1857.5	5.54	6.19	18700	1860	5.45	6.25
18900	1880	5.43	6.11	18900	1880	5.22	6.10
19125	1902.5	5.62	6.36	19100	1900	5.47	6.31

Spectrum Plot of Worst Value

1.4MHz / 16QAM



3MHz / 16QAM



5MHz / 16QAM



10MHz / 16QAM



15MHz / 16QAM



20MHz / 16QAM




4.7 Conducted Spurious Emissions

4.7.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .


4.7.2 Test Setup

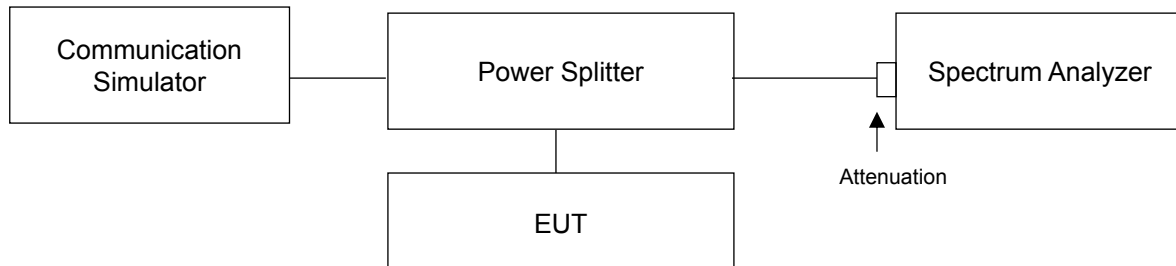

4.7.3 Test Procedure

- All measurements were done at middle operational frequency range.
- Measuring frequency range is from 9 kHz to the tenth harmonic of the highest fundamental frequency, it shall be connected to the pad attenuated the carried frequency.
RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

4.7.4 Test Results

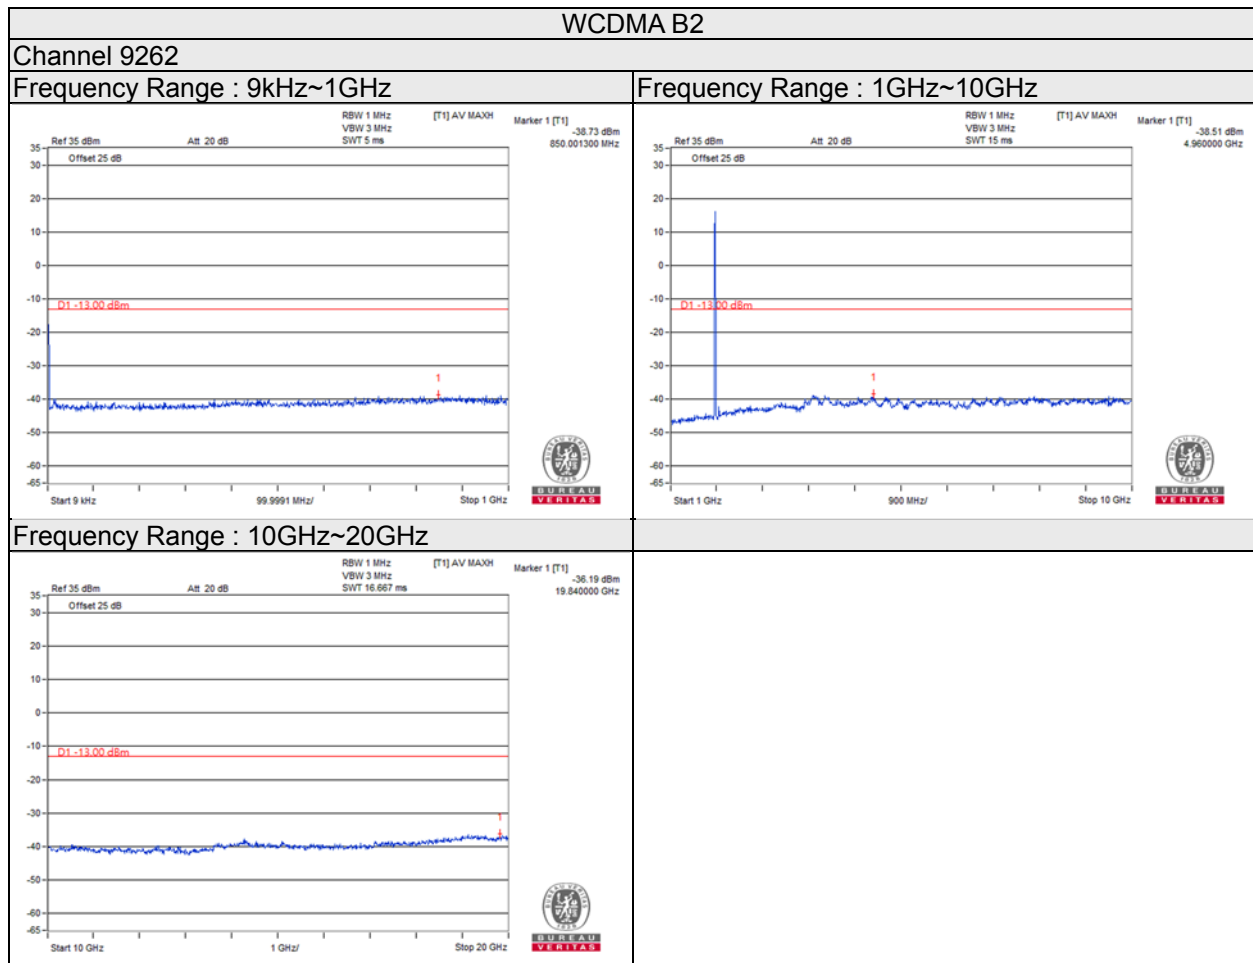


Note: The signal of 9kHz is IF signal from test instrument.


WCDMA B2

Channel 9400


Frequency Range : 9kHz~1GHz

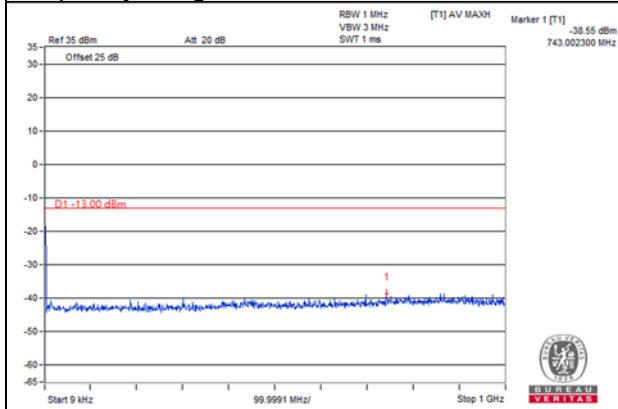

Frequency Range : 1GHz~10GHz

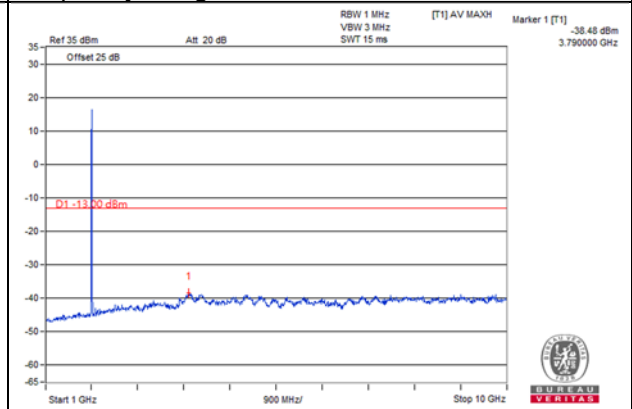

Frequency Range : 10GHz~20GHz

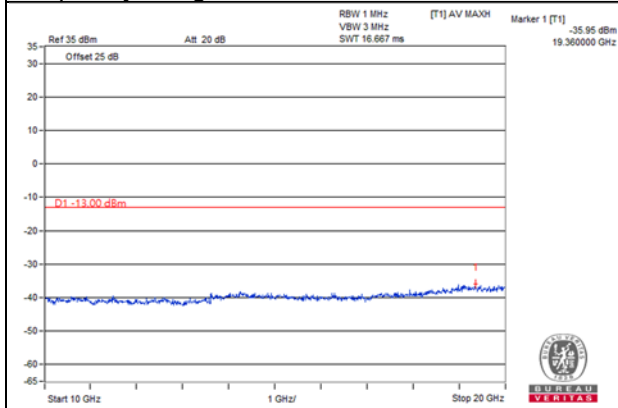


Note: The signal of 9kHz is IF signal from test instrument.


WCDMA B2

Channel 9538


Frequency Range : 9kHz~1GHz

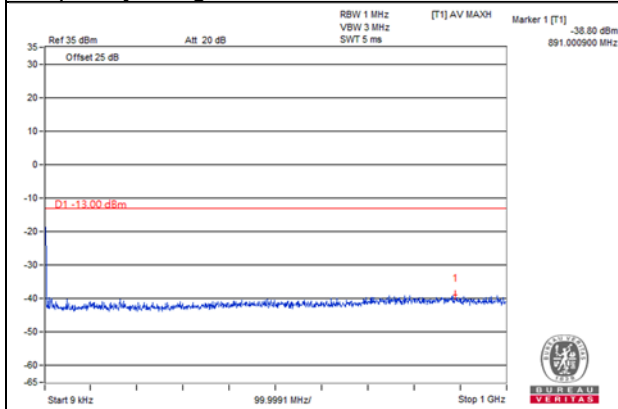

Frequency Range : 1GHz~10GHz

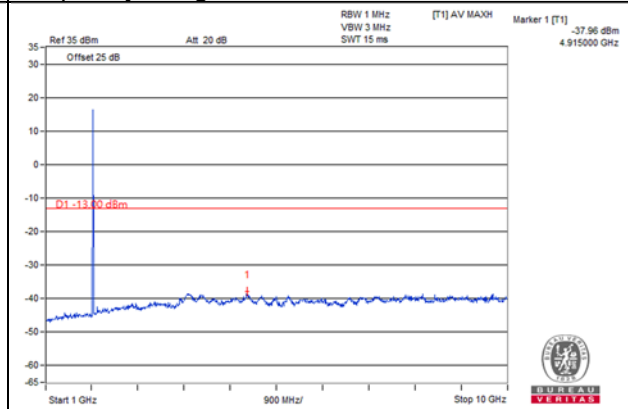

Frequency Range : 10GHz~20GHz

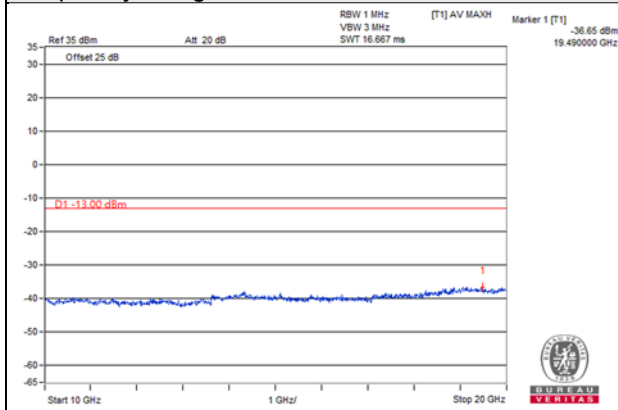


Note: The signal of 9kHz is IF signal from test instrument.


LTE Band 2 Channel Bandwidth: 1.4MHz

Channel 18607


Frequency Range : 9kHz~1GHz

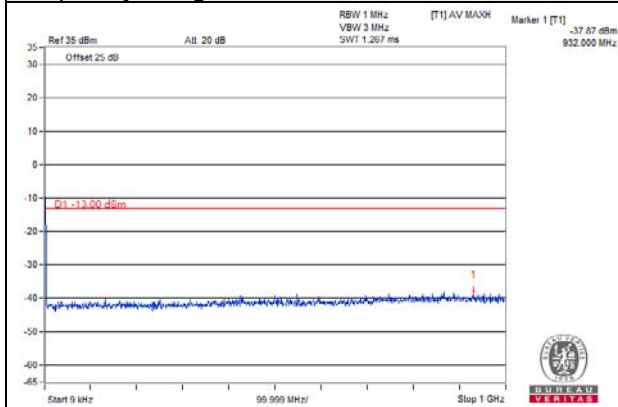

Frequency Range : 1GHz ~10GHz

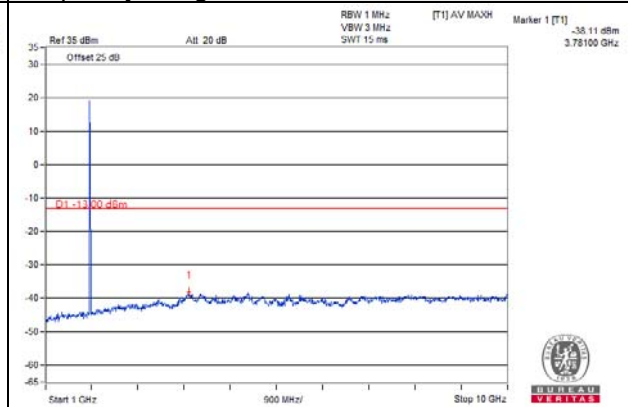

Frequency Range : 10GHz~20GHz

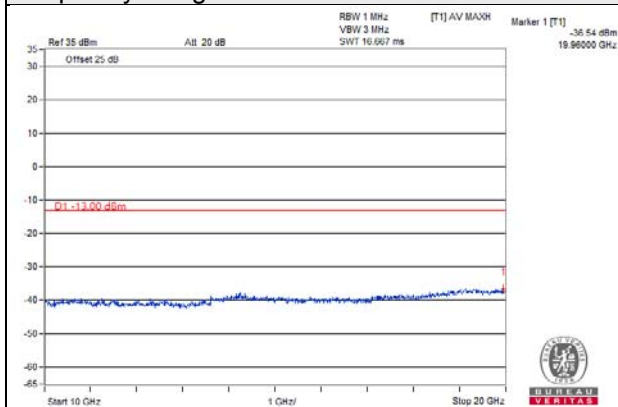


Note: The signal of 9kHz is IF signal from test instrument.


LTE Band 2 Channel Bandwidth: 1.4MHz

Channel 18900


Frequency Range : 9kHz~1GHz

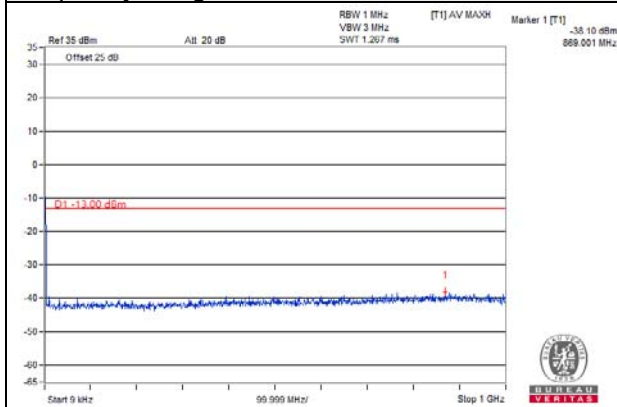

Frequency Range : 1GHz ~10GHz

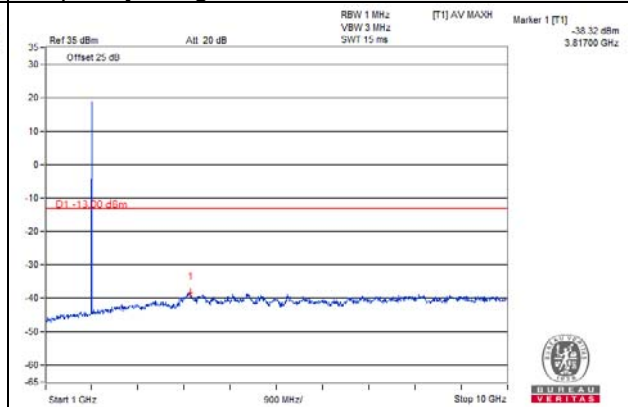

Frequency Range : 10GHz~20GHz

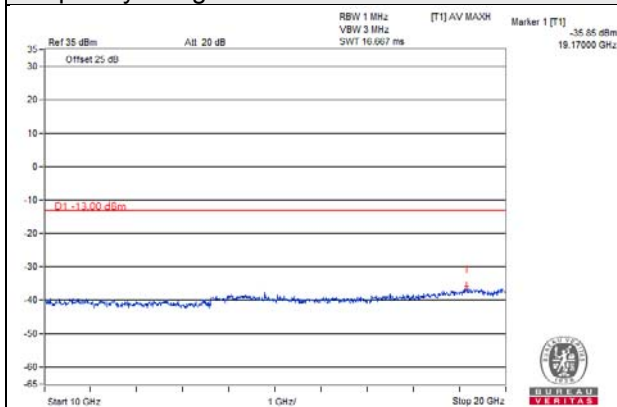


Note: The signal of 9kHz is IF signal from test instrument.


LTE Band 2 Channel Bandwidth: 1.4MHz

Channel 19193


Frequency Range : 9kHz~1GHz

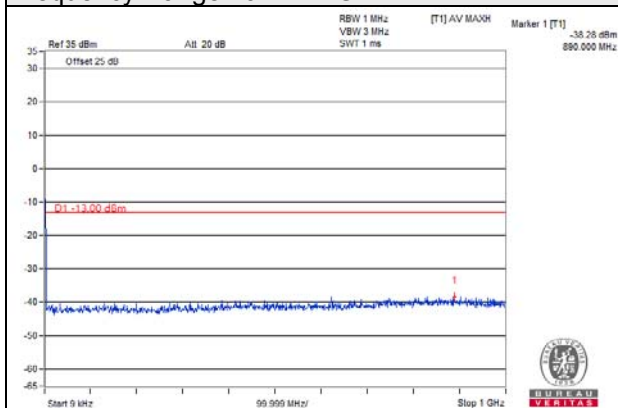

Frequency Range : 1GHz ~10GHz

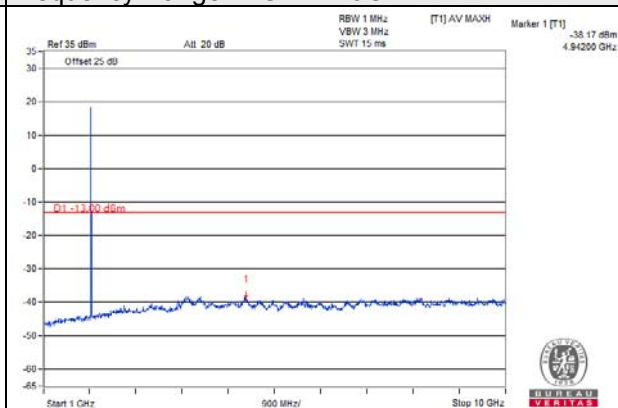

Frequency Range : 10GHz~20GHz

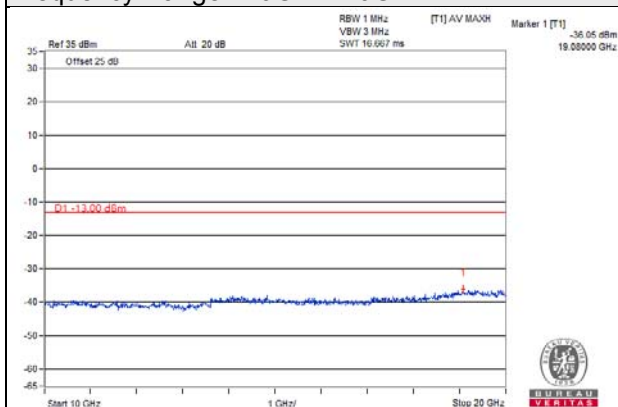


Note: The signal of 9kHz is IF signal from test instrument.


LTE Band 2 Channel Bandwidth: 3MHz

Channel 18615


Frequency Range : 9kHz~1GHz

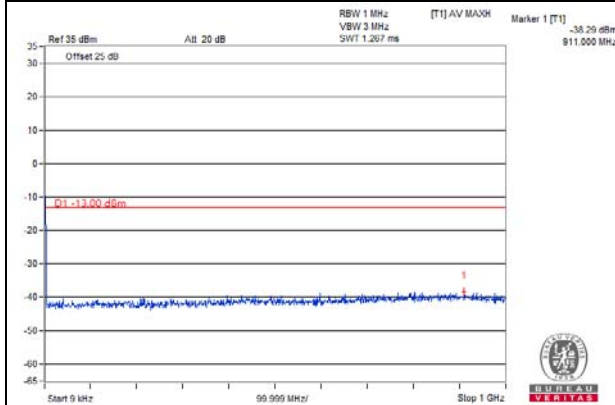

Frequency Range : 1GHz ~10GHz

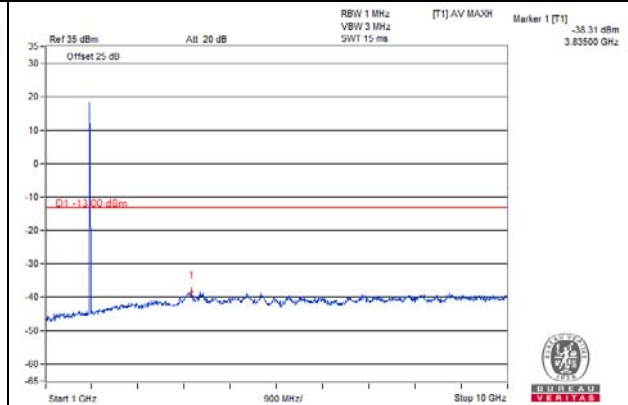

Frequency Range : 10GHz~20GHz

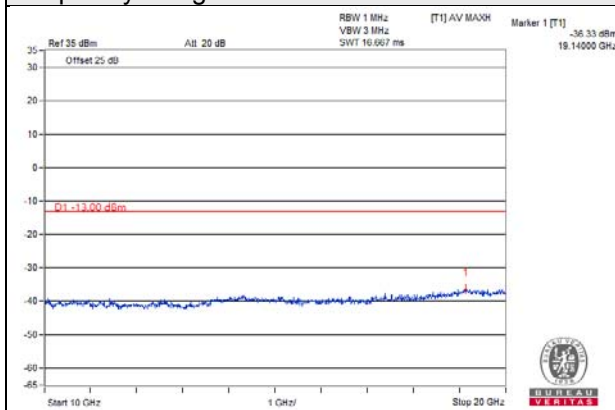


Note: The signal of 9kHz is IF signal from test instrument.


LTE Band 2 Channel Bandwidth: 3MHz

Channel 18900


Frequency Range : 9kHz~1GHz

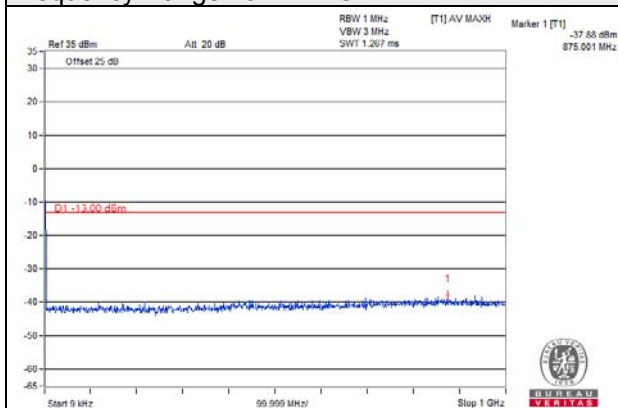

Frequency Range : 1GHz ~10GHz

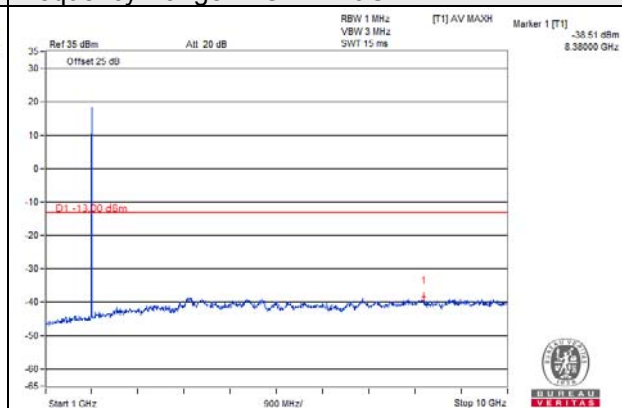

Frequency Range : 10GHz~20GHz

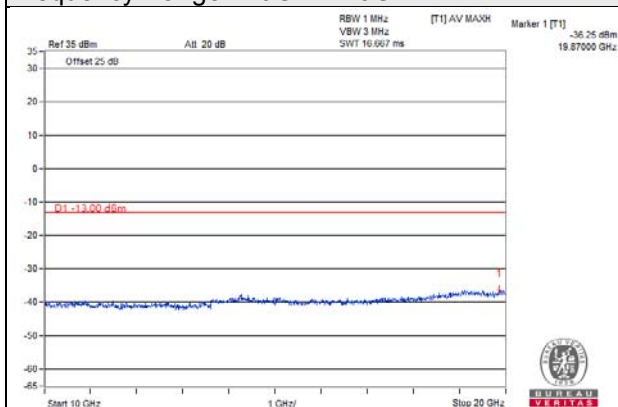


Note: The signal of 9kHz is IF signal from test instrument.


LTE Band 2 Channel Bandwidth: 3MHz

Channel 19185


Frequency Range : 9kHz~1GHz

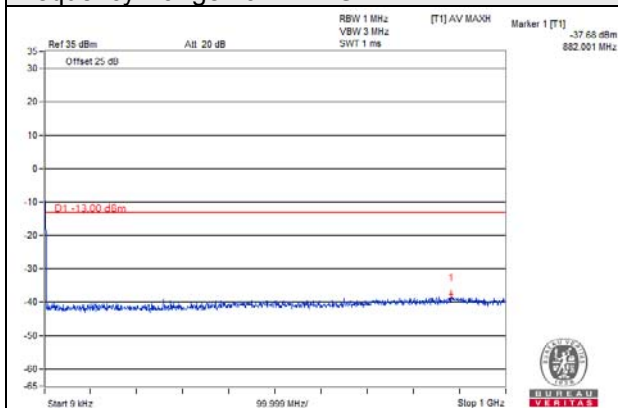

Frequency Range : 1GHz ~10GHz

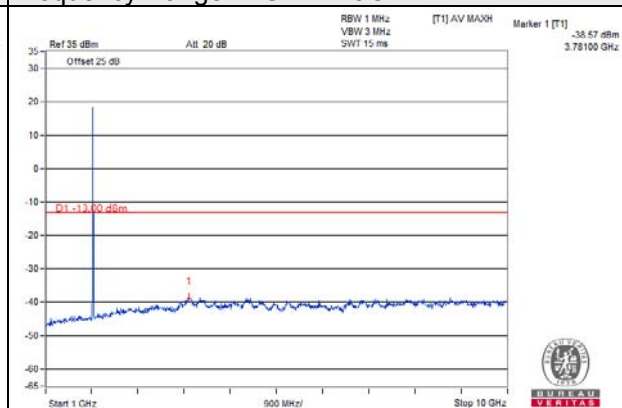

Frequency Range : 10GHz~20GHz

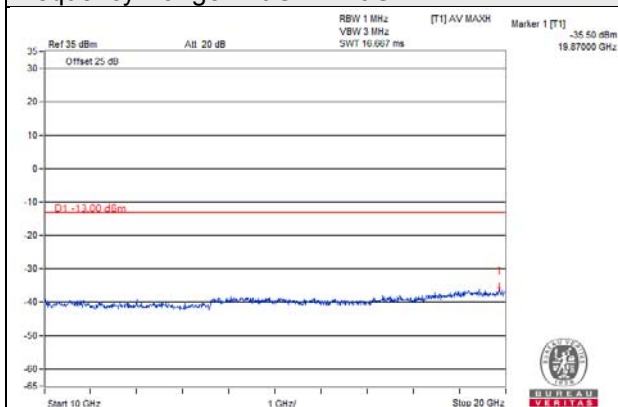


Note: The signal of 9kHz is IF signal from test instrument.


LTE Band 2 Channel Bandwidth: 5MHz

Channel 18625


Frequency Range : 9kHz~1GHz

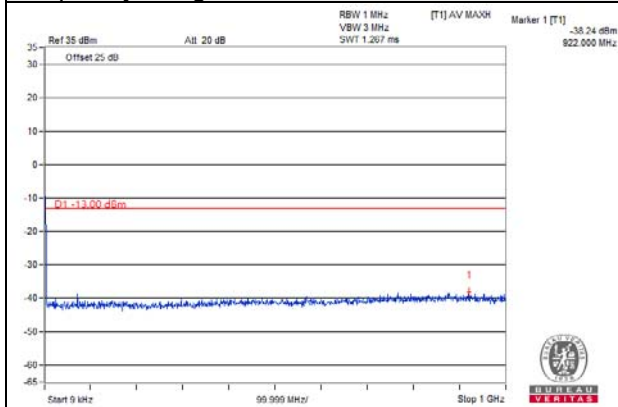

Frequency Range : 1GHz ~10GHz

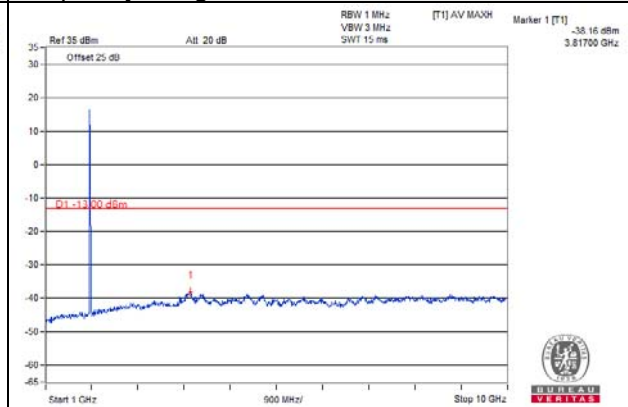

Frequency Range : 10GHz~20GHz

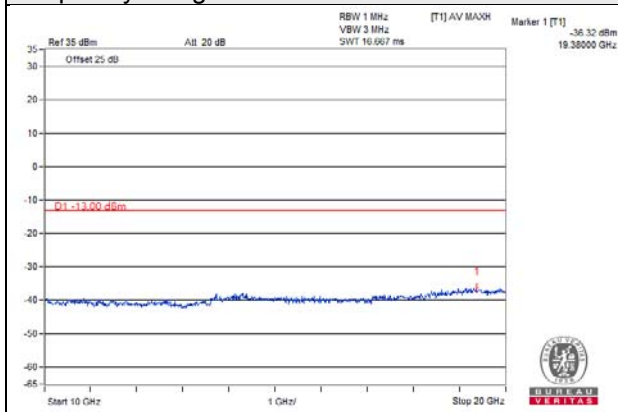


Note: The signal of 9kHz is IF signal from test instrument.


LTE Band 2 Channel Bandwidth: 5MHz

Channel 18900


Frequency Range : 9kHz~1GHz

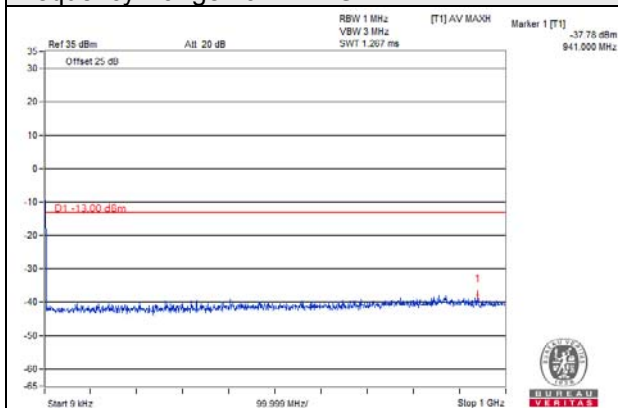

Frequency Range : 1GHz ~10GHz

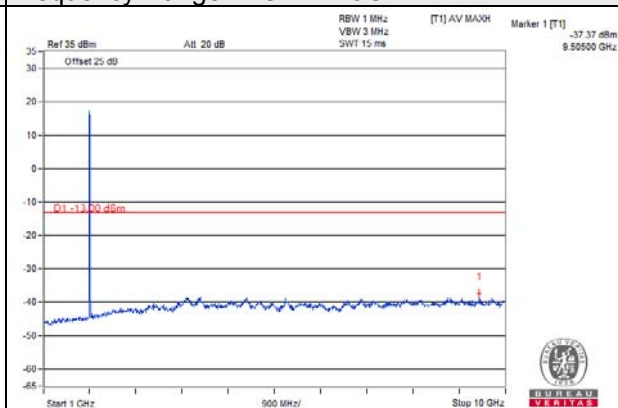

Frequency Range : 10GHz~20GHz

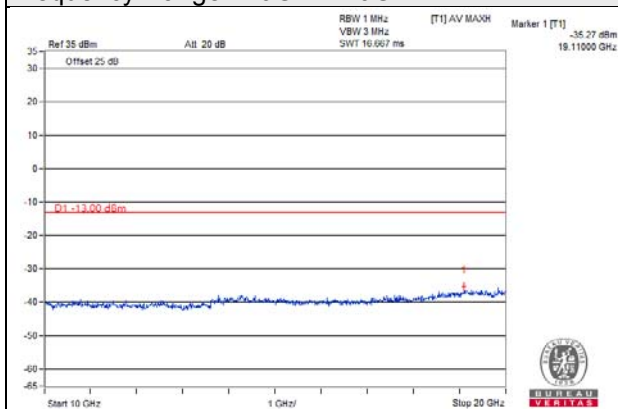


Note: The signal of 9kHz is IF signal from test instrument.


LTE Band 2 Channel Bandwidth: 5MHz

Channel 19175


Frequency Range : 9kHz~1GHz

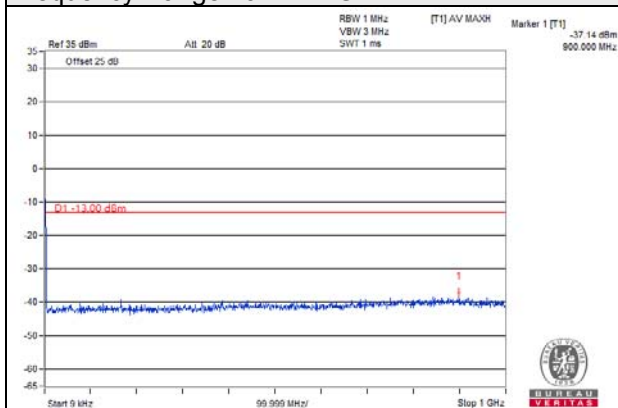

Frequency Range : 1GHz ~10GHz

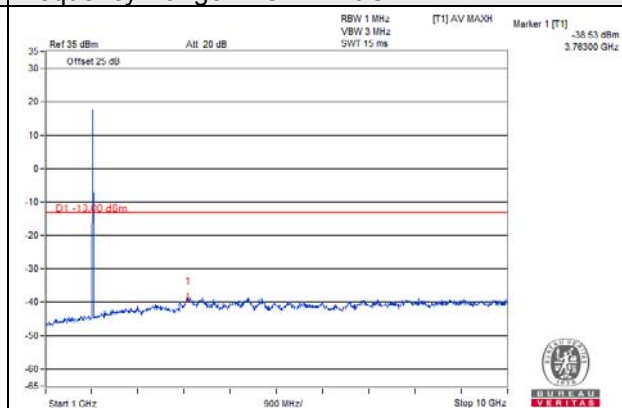

Frequency Range : 10GHz~20GHz

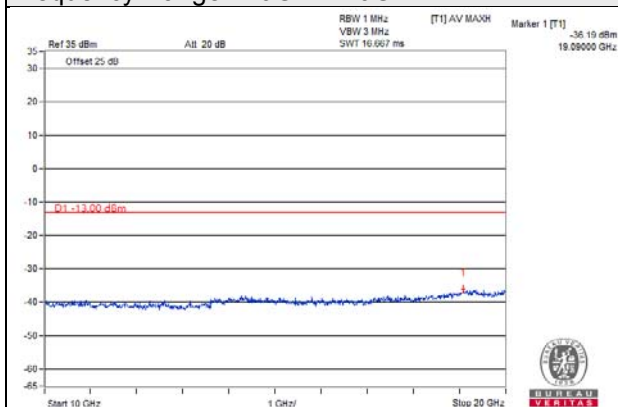


Note: The signal of 9kHz is IF signal from test instrument.


LTE Band 2 Channel Bandwidth: 10MHz

Channel 18650


Frequency Range : 9kHz~1GHz

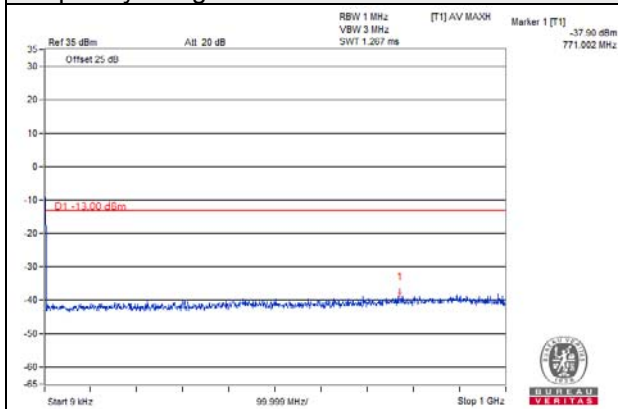

Frequency Range : 1GHz ~10GHz

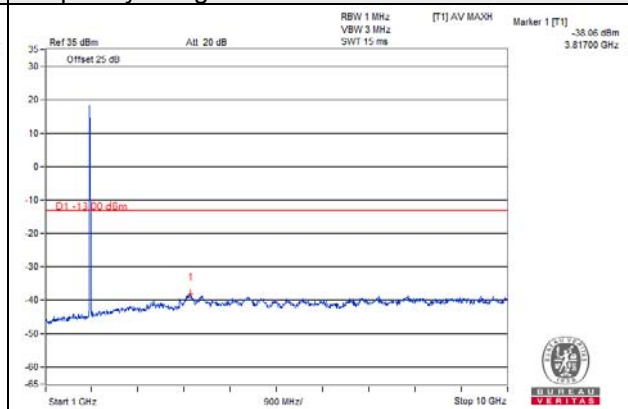

Frequency Range : 10GHz~20GHz

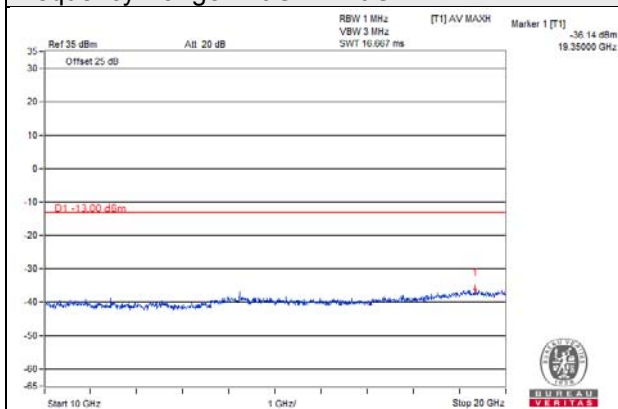


Note: The signal of 9kHz is IF signal from test instrument.


LTE Band 2 Channel Bandwidth: 10MHz

Channel 18900


Frequency Range : 9kHz~1GHz

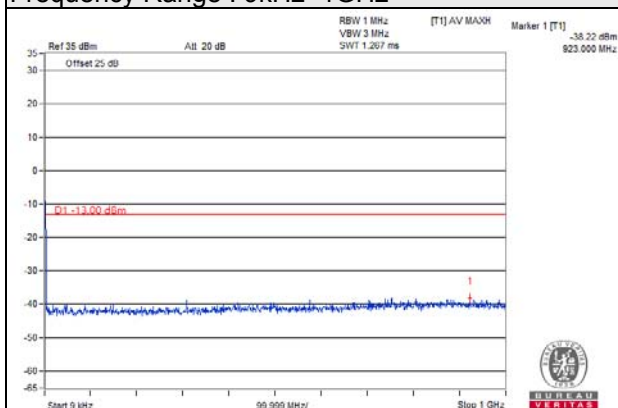

Frequency Range : 1GHz ~10GHz

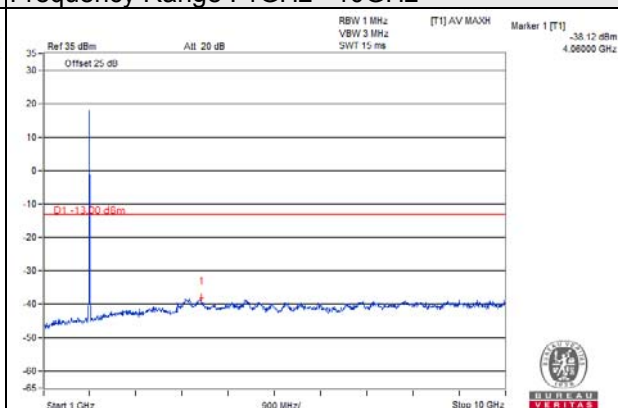

Frequency Range : 10GHz~20GHz

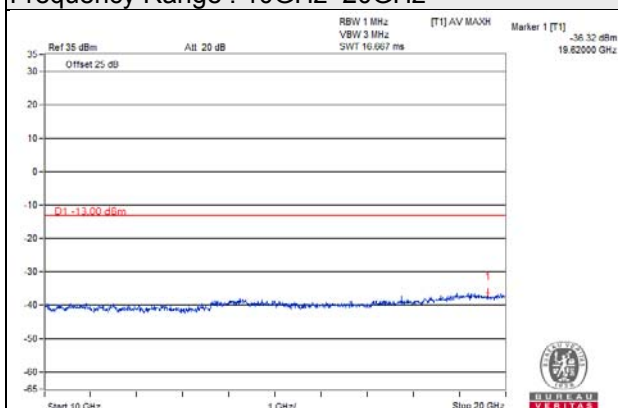


Note: The signal of 9kHz is IF signal from test instrument.


LTE Band 2 Channel Bandwidth: 10MHz

Channel 19150


Frequency Range : 9kHz~1GHz

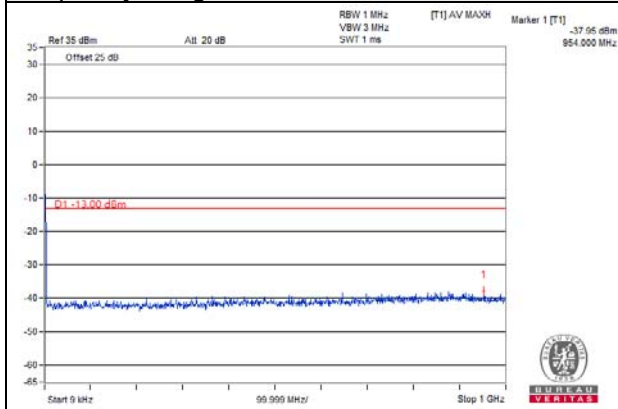

Frequency Range : 1GHz ~10GHz

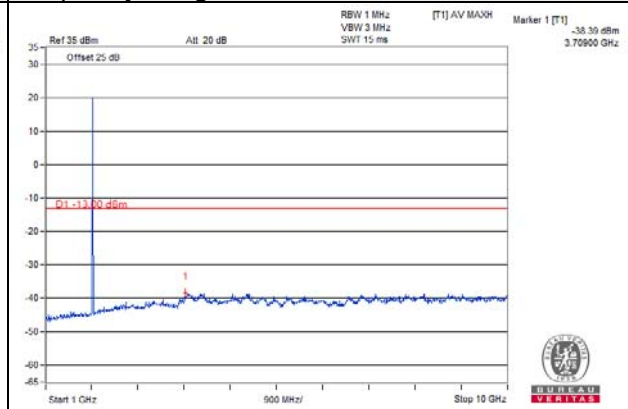


Frequency Range : 10GHz~20GHz

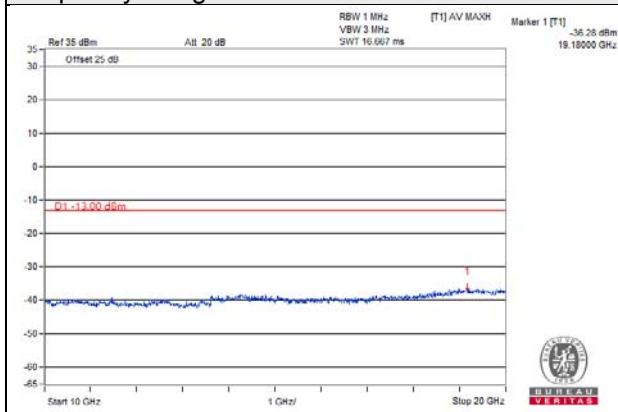


Note: The signal of 9kHz is IF signal from test instrument.

LTE Band 2 Channel Bandwidth: 15MHz
Channel 18675


Frequency Range : 9kHz~1GHz

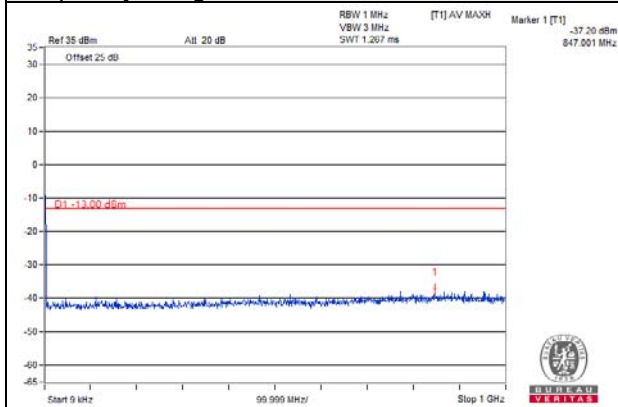

Frequency Range : 1GHz ~10GHz

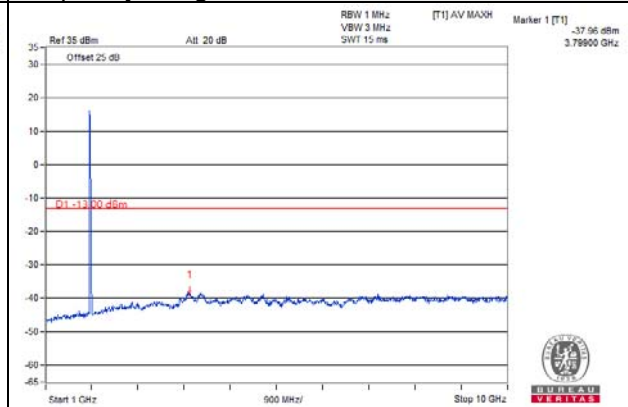

Frequency Range : 10GHz~20GHz

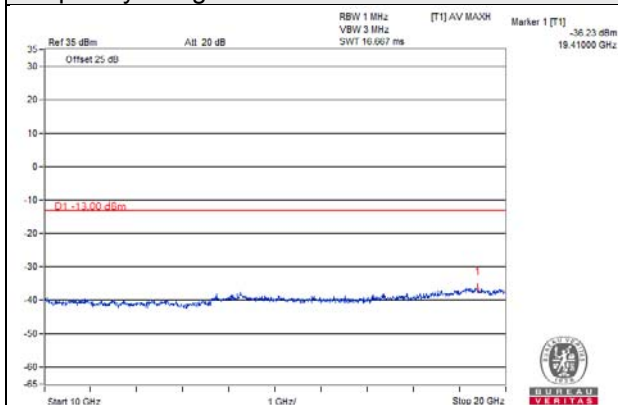


Note: The signal of 9kHz is IF signal from test instrument.


LTE Band 2 Channel Bandwidth: 15MHz

Channel 18900


Frequency Range : 9kHz~1GHz

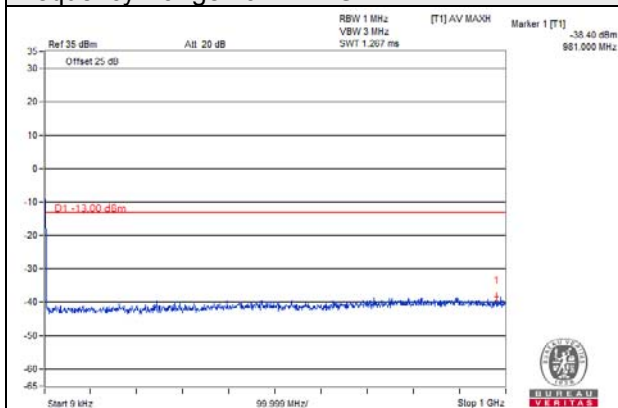

Frequency Range : 1GHz ~10GHz

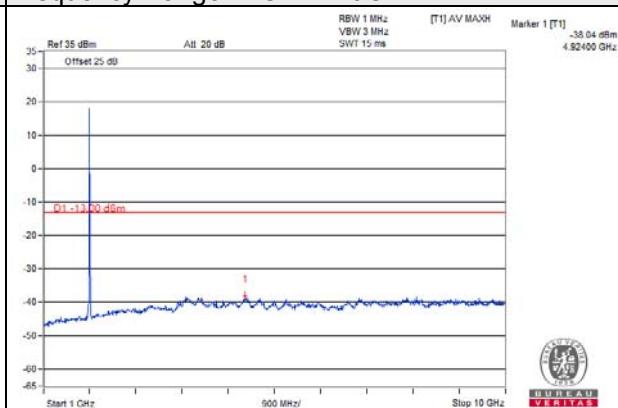

Frequency Range : 10GHz~20GHz

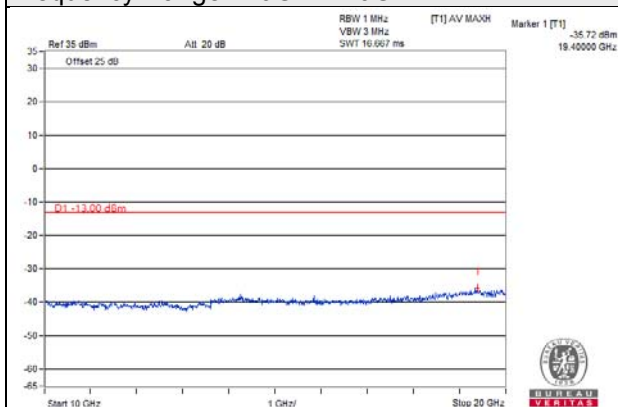


Note: The signal of 9kHz is IF signal from test instrument.


LTE Band 2 Channel Bandwidth: 15MHz

Channel 19125


Frequency Range : 9kHz~1GHz

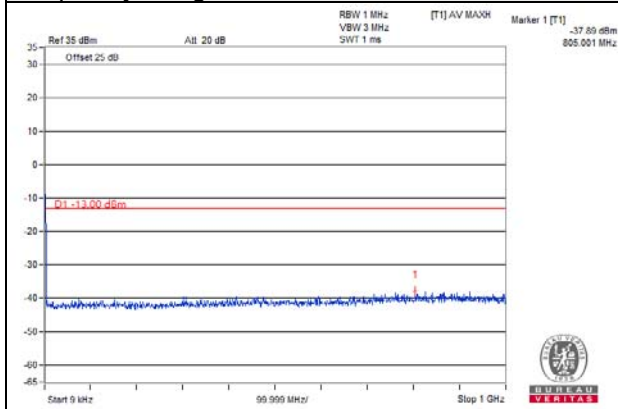

Frequency Range : 1GHz ~10GHz

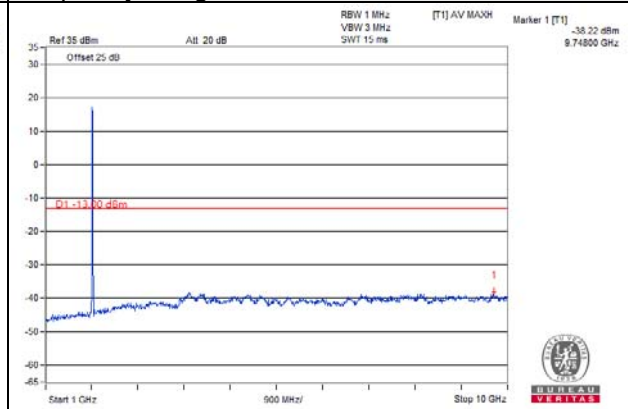


Frequency Range : 10GHz~20GHz

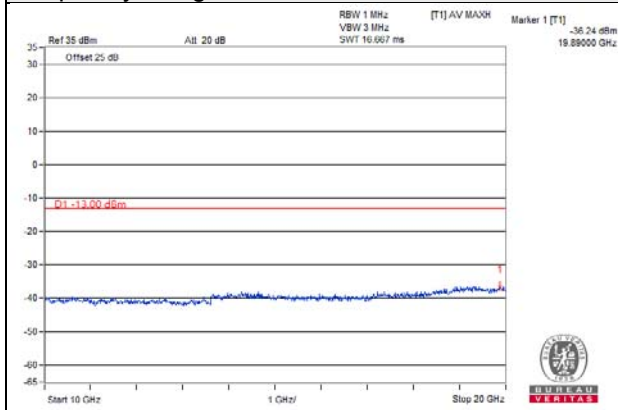


Note: The signal of 9kHz is IF signal from test instrument.

LTE Band 2 Channel Bandwidth: 20MHz
Channel 18700


Frequency Range : 9kHz~1GHz

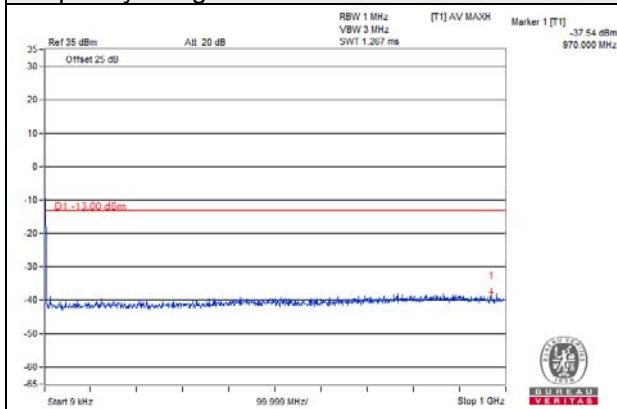

Frequency Range : 1GHz ~10GHz

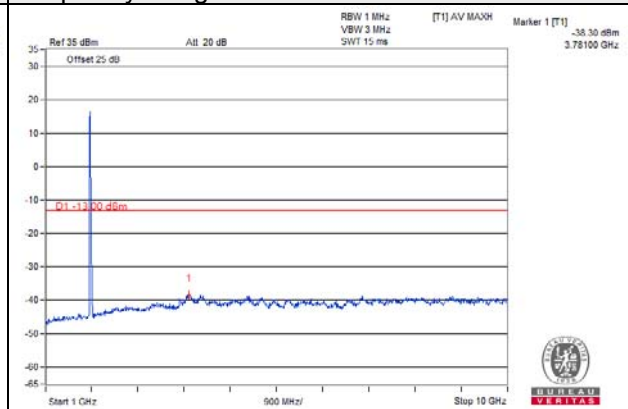

Frequency Range : 10GHz~20GHz

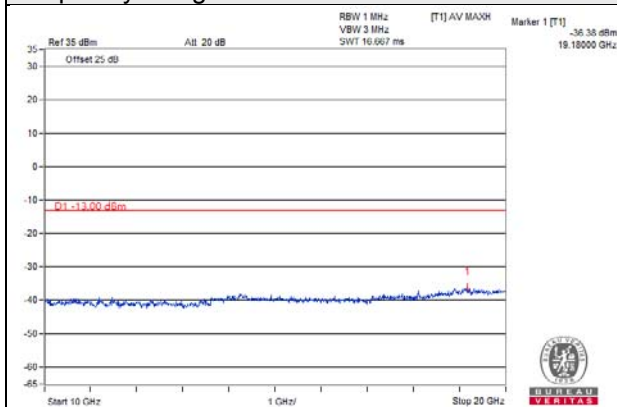


Note: The signal of 9kHz is IF signal from test instrument.


LTE Band 2 Channel Bandwidth: 20MHz

Channel 18900


Frequency Range : 9kHz~1GHz

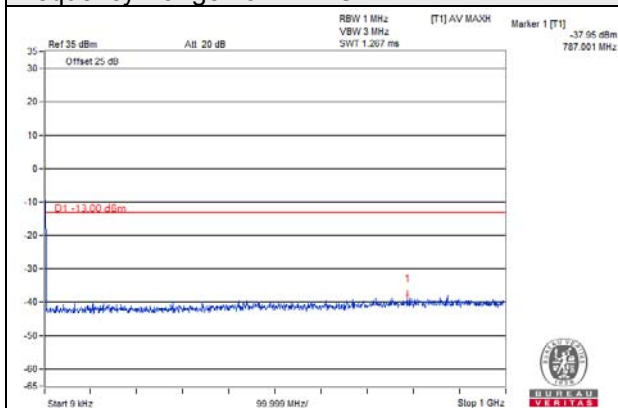

Frequency Range : 1GHz ~10GHz

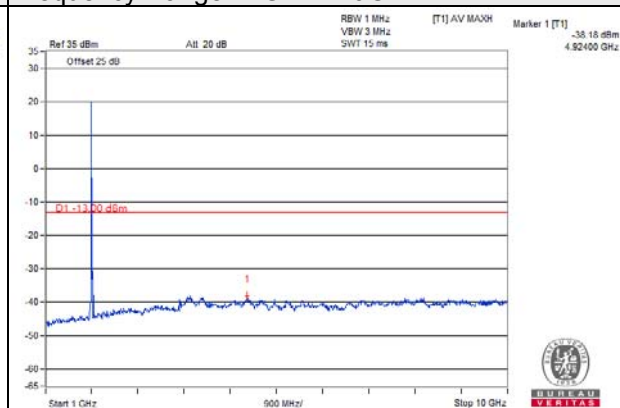

Frequency Range : 10GHz~20GHz

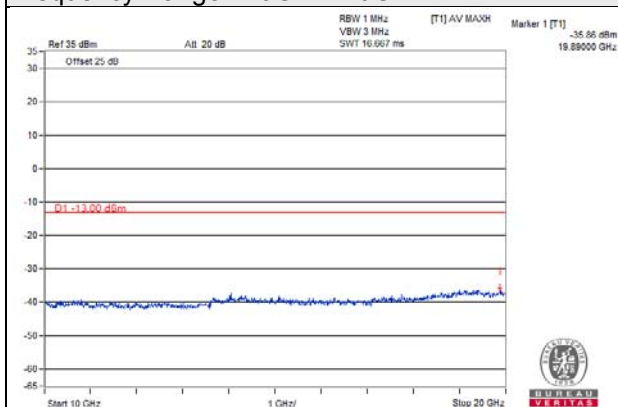


Note: The signal of 9kHz is IF signal from test instrument.


LTE Band 2 Channel Bandwidth: 20MHz

Channel 19100


Frequency Range : 9kHz~1GHz

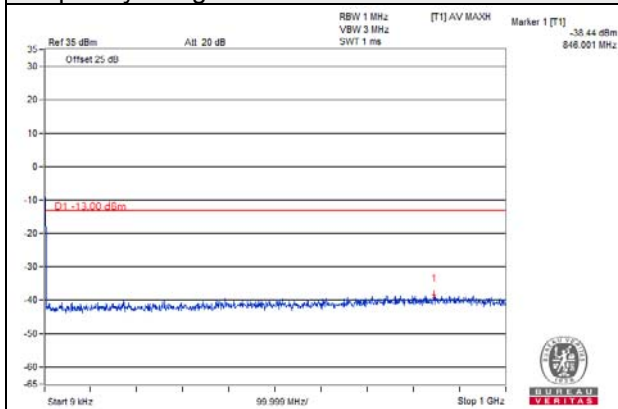

Frequency Range : 1GHz ~10GHz

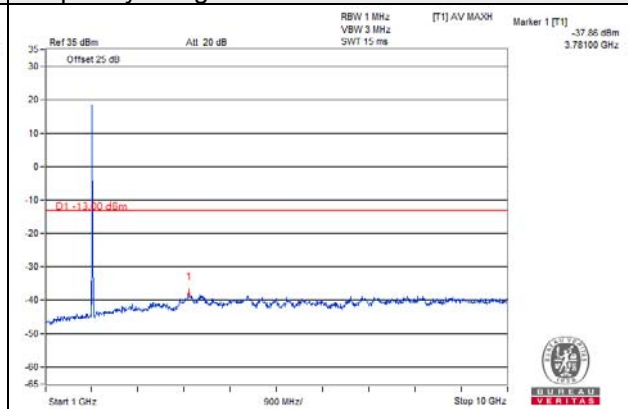

Frequency Range : 10GHz~20GHz

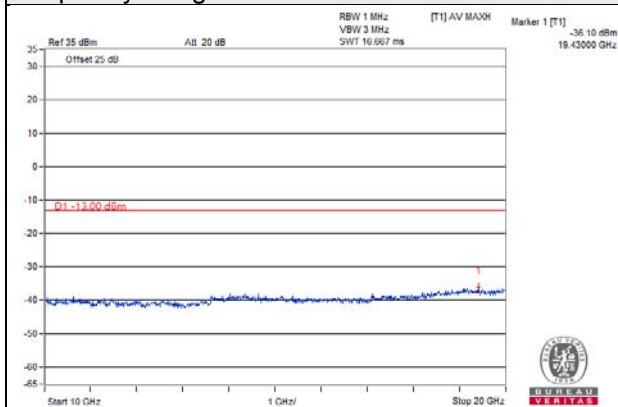

Note: The signal of 9kHz is IF signal from test instrument.

4.8 Radiated Emission Measurement

4.8.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

4.8.2 Test Procedure


- a. The power was measured with Spectrum Analyzer.
- b. Substitution method is used for EIRP measurement. In the semi-anechoic chamber, EUT placed on the 0.8m/1.5m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. Follow ANSI 63.26 section 5.2.7 d), $\text{EIRP Value (dBm)} = \text{Read Value (dB}\mu\text{V/m)} - \text{Correction Factor @ 3m}$
- d. $\text{Correction Factor (dB) @ 3m} = 20\log(D) - 104.8$; where D is the measurement distance @3m $= -95.26\text{dB}$
- e. ERP power can be calculated from EIRP power by subtracting the gain of dipole, $\text{ERP power} = \text{EIRP power} - 2.15\text{dBi}$.

NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.


4.8.3 Deviation from Test Standard

No deviation.

4.8.4 Test Setup For Below 1GHz

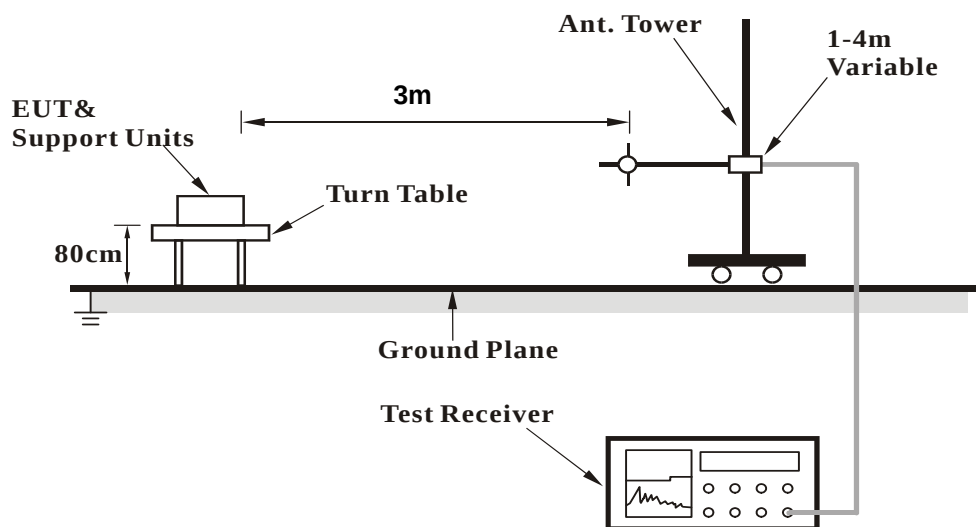

For Above 1GHz:

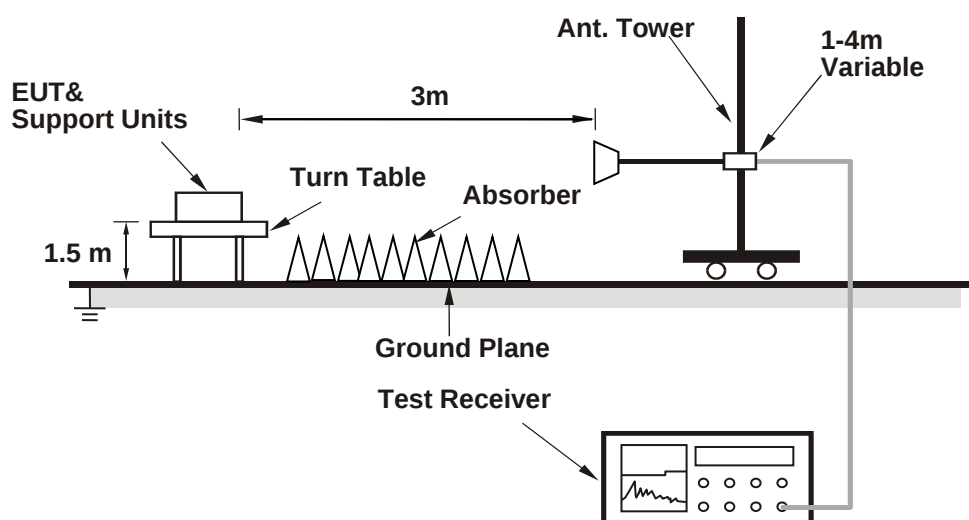

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.8.5 Test Results

Below 1GHz

WCDMA B2:

Mode	TX channel 9262	Frequency Range	Below 1000 MHz
------	-----------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	209.86	35.22	-95.26	-60.04	-13	-47.04
2	250.79	38.98	-95.26	-56.28	-13	-43.28
3	282.92	29.55	-95.26	-65.71	-13	-52.71
4	302.58	35.32	-95.26	-59.94	-13	-46.94
5	767.76	35.57	-95.26	-59.69	-13	-46.69
6	907.42	32.67	-95.26	-62.59	-13	-49.59
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	60.73	36.36	-95.26	-58.90	-13	-45.90
2	84.58	40.39	-95.26	-54.87	-13	-41.87
3	158.43	31.59	-95.26	-63.67	-13	-50.67
4	189.52	38.42	-95.26	-56.84	-13	-43.84
5	222.91	37.61	-95.26	-57.65	-13	-44.65
6	848.4	34.6	-95.26	-60.66	-13	-47.66

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 9400	Frequency Range	Below 1000 MHz
------	-----------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	210.3	34.91	-95.26	-60.35	-13	-47.35
2	249.98	35.02	-95.26	-60.24	-13	-47.24
3	286.47	29.05	-95.26	-66.21	-13	-53.21
4	301.26	34.55	-95.26	-60.71	-13	-47.71
5	769.54	31.05	-95.26	-64.21	-13	-51.21
6	907.9	31.08	-95.26	-64.18	-13	-51.18

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	61.46	37.41	-95.26	-57.85	-13	-44.85
2	88.6	41.8	-95.26	-53.46	-13	-40.46
3	159.03	39.59	-95.26	-55.67	-13	-42.67
4	190.01	29.23	-95.26	-66.03	-13	-53.03
5	223.35	33.37	-95.26	-61.89	-13	-48.89
6	851.99	35.86	-95.26	-59.40	-13	-46.40

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 9538	Frequency Range	Below 1000 MHz
------	-----------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	210.65	38.22	-95.26	-57.04	-13	-44.04
2	252.42	39.98	-95.26	-55.28	-13	-42.28
3	287.86	27.16	-95.26	-68.10	-13	-55.10
4	301.42	35.63	-95.26	-59.63	-13	-46.63
5	768.22	32.97	-95.26	-62.29	-13	-49.29
6	911.93	30.13	-95.26	-65.13	-13	-52.13

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	61.61	41.03	-95.26	-54.23	-13	-41.23
2	88.43	42.33	-95.26	-52.93	-13	-39.93
3	162.13	32.25	-95.26	-63.01	-13	-50.01
4	193.09	40.2	-95.26	-55.06	-13	-42.06
5	227.31	35.19	-95.26	-60.07	-13	-47.07
6	852.94	38.06	-95.26	-57.20	-13	-44.20

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

LTE Band 2: 1.4 MHz

Mode	TX channel 18607	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	187.19	33.37	-95.26	-61.89	-13	-48.89
2	234.26	33.59	-95.26	-61.67	-13	-48.67
3	264.04	30.37	-95.26	-64.89	-13	-51.89
4	291.56	36.71	-95.26	-58.55	-13	-45.55
5	750.01	31.27	-95.26	-63.99	-13	-50.99
6	898	29.53	-95.26	-65.73	-13	-52.73
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	49.64	35.04	-95.26	-60.22	-13	-47.22
2	66.01	38.74	-95.26	-56.52	-13	-43.52
3	141.99	32.32	-95.26	-62.94	-13	-49.94
4	177.15	28.65	-95.26	-66.61	-13	-53.61
5	207.83	34.53	-95.26	-60.73	-13	-47.73
6	831.44	33.72	-95.26	-61.54	-13	-48.54

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 18900	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	188.56	35.17	-95.26	-60.09	-13	-47.09
2	239.81	38.83	-95.26	-56.43	-13	-43.43
3	264.7	29.97	-95.26	-65.29	-13	-52.29
4	295.78	36.5	-95.26	-58.76	-13	-45.76
5	752.34	33.31	-95.26	-61.95	-13	-48.95
6	903.95	32.98	-95.26	-62.28	-13	-49.28

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	52.38	34.53	-95.26	-60.73	-13	-47.73
2	69.41	36.58	-95.26	-58.68	-13	-45.68
3	146.96	30.27	-95.26	-64.99	-13	-51.99
4	183.48	26.33	-95.26	-68.93	-13	-55.93
5	208.36	32.69	-95.26	-62.57	-13	-49.57
6	834.75	32.31	-95.26	-62.95	-13	-49.95

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 19193	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	196.85	34.76	-95.26	-60.50	-13	-47.50
2	239.83	35.56	-95.26	-59.70	-13	-46.70
3	264.35	27.4	-95.26	-67.86	-13	-54.86
4	300.09	32.98	-95.26	-62.28	-13	-49.28
5	760.05	31.58	-95.26	-63.68	-13	-50.68
6	905.32	29.44	-95.26	-65.82	-13	-52.82

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	54.1	35.02	-95.26	-60.24	-13	-47.24
2	74.35	36.12	-95.26	-59.14	-13	-46.14
3	147.15	29.89	-95.26	-65.37	-13	-52.37
4	191.1	26.2	-95.26	-69.06	-13	-56.06
5	207.88	33.07	-95.26	-62.19	-13	-49.19
6	838.4	32.91	-95.26	-62.35	-13	-49.35

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

LTE Band 2: 3 MHz

Mode	TX channel 18615	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	202.73	34.78	-95.26	-60.48	-13	-47.48
2	243.06	37.6	-95.26	-57.66	-13	-44.66
3	272.37	27.23	-95.26	-68.03	-13	-55.03
4	304.98	34.77	-95.26	-60.49	-13	-47.49
5	761.06	33.84	-95.26	-61.42	-13	-48.42
6	913.22	28.62	-95.26	-66.64	-13	-53.64
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	56.91	38.38	-95.26	-56.88	-13	-43.88
2	77.32	34.89	-95.26	-60.37	-13	-47.37
3	150.95	33.71	-95.26	-61.55	-13	-48.55
4	192.15	23.71	-95.26	-71.55	-13	-58.55
5	213.15	35.07	-95.26	-60.19	-13	-47.19
6	844	31.54	-95.26	-63.72	-13	-50.72

Remarks:

- Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
- Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 18900	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	203.61	33.04	-95.26	-62.22	-13	-49.22
2	245.2	39.68	-95.26	-55.58	-13	-42.58
3	275.95	31.23	-95.26	-64.03	-13	-51.03
4	313.3	35.87	-95.26	-59.39	-13	-46.39
5	768.3	33.37	-95.26	-61.89	-13	-48.89
6	921.47	30.91	-95.26	-64.35	-13	-51.35

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	63.31	35.89	-95.26	-59.37	-13	-46.37
2	76.92	38.27	-95.26	-56.99	-13	-43.99
3	151.4	32.22	-95.26	-63.04	-13	-50.04
4	196.92	29.26	-95.26	-66.00	-13	-53.00
5	221.6	35.49	-95.26	-59.77	-13	-46.77
6	843.96	34.31	-95.26	-60.95	-13	-47.95

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 19185	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	207.05	34.82	-95.26	-60.44	-13	-47.44
2	251.88	35.86	-95.26	-59.40	-13	-46.40
3	278.62	26.46	-95.26	-68.80	-13	-55.80
4	315.34	33.7	-95.26	-61.56	-13	-48.56
5	776.59	31.1	-95.26	-64.16	-13	-51.16
6	921.35	30.49	-95.26	-64.77	-13	-51.77

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	67.06	34.74	-95.26	-60.52	-13	-47.52
2	83.39	35.47	-95.26	-59.79	-13	-46.79
3	157.35	30.82	-95.26	-64.44	-13	-51.44
4	197.39	25.2	-95.26	-70.06	-13	-57.06
5	221.98	33.82	-95.26	-61.44	-13	-48.44
6	847.07	32.72	-95.26	-62.54	-13	-49.54

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

LTE Band 2: 5 MHz

Mode	TX channel 18625	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	206.72	33.75	-95.26	-61.51	-13	-48.51
2	252.63	33.7	-95.26	-61.56	-13	-48.56
3	283.9	29.28	-95.26	-65.98	-13	-52.98
4	320.02	34.7	-95.26	-60.56	-13	-47.56
5	784.97	32.12	-95.26	-63.14	-13	-50.14
6	923.24	33.17	-95.26	-62.09	-13	-49.09
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	73.21	35.16	-95.26	-60.10	-13	-47.10
2	86.6	37.21	-95.26	-58.05	-13	-45.05
3	159.95	34.77	-95.26	-60.49	-13	-47.49
4	203.79	28.54	-95.26	-66.72	-13	-53.72
5	225.76	34.17	-95.26	-61.09	-13	-48.09
6	854.01	31.95	-95.26	-63.31	-13	-50.31

Remarks:

- Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
- Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 18900	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	208.25	33.9	-95.26	-61.36	-13	-48.36
2	257.87	35.16	-95.26	-60.10	-13	-47.10
3	284.72	26.85	-95.26	-68.41	-13	-55.41
4	326.74	33.92	-95.26	-61.34	-13	-48.34
5	792.91	33.74	-95.26	-61.52	-13	-48.52
6	923.22	29.79	-95.26	-65.47	-13	-52.47

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	78.07	35.73	-95.26	-59.53	-13	-46.53
2	86.34	37.24	-95.26	-58.02	-13	-45.02
3	167.01	31.5	-95.26	-63.76	-13	-50.76
4	211.54	26	-95.26	-69.26	-13	-56.26
5	230.49	36.44	-95.26	-58.82	-13	-45.82
6	857.2	32.99	-95.26	-62.27	-13	-49.27

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 19175	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	208.43	34.13	-95.26	-61.13	-13	-48.13
2	261.29	35.38	-95.26	-59.88	-13	-46.88
3	285.84	27.64	-95.26	-67.62	-13	-54.62
4	326.83	32.71	-95.26	-62.55	-13	-49.55
5	800.13	31.65	-95.26	-63.61	-13	-50.61
6	928.68	29.78	-95.26	-65.48	-13	-52.48

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	85.52	35.03	-95.26	-60.23	-13	-47.23
2	94.49	35.82	-95.26	-59.44	-13	-46.44
3	168.73	31.36	-95.26	-63.90	-13	-50.90
4	217.17	25.37	-95.26	-69.89	-13	-56.89
5	233.36	33.79	-95.26	-61.47	-13	-48.47
6	860.92	32.4	-95.26	-62.86	-13	-49.86

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

LTE Band 2: 10 MHz

Mode	TX channel 18650	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	200.25	33.15	-95.26	-62.11	-13	-49.11
2	245.63	34.18	-95.26	-61.08	-13	-48.08
3	271.44	30.91	-95.26	-64.35	-13	-51.35
4	305.18	33.58	-95.26	-61.68	-13	-48.68
5	765.08	35.28	-95.26	-59.98	-13	-46.98
6	913.4	32.7	-95.26	-62.56	-13	-49.56

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	55.62	37.32	-95.26	-57.94	-13	-44.94
2	75.27	39.1	-95.26	-56.16	-13	-43.16
3	152.41	31.37	-95.26	-63.89	-13	-50.89
4	191.86	28.23	-95.26	-67.03	-13	-54.03
5	214.29	35.03	-95.26	-60.23	-13	-47.23
6	840.12	36.53	-95.26	-58.73	-13	-45.73

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 18900	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	200.88	35.78	-95.26	-59.48	-13	-46.48
2	254.12	38.31	-95.26	-56.95	-13	-43.95
3	276.97	31.41	-95.26	-63.85	-13	-50.85
4	307.38	36.91	-95.26	-58.35	-13	-45.35
5	770.2	33.99	-95.26	-61.27	-13	-48.27
6	913.23	28.96	-95.26	-66.30	-13	-53.30

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	58.9	35.29	-95.26	-59.97	-13	-46.97
2	80.04	36.46	-95.26	-58.80	-13	-45.80
3	160.31	31.33	-95.26	-63.93	-13	-50.93
4	193.23	29.53	-95.26	-65.73	-13	-52.73
5	216.33	32.34	-95.26	-62.92	-13	-49.92
6	840.13	36.02	-95.26	-59.24	-13	-46.24

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 19150	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	205.72	34.16	-95.26	-61.10	-13	-48.10
2	258.17	35.07	-95.26	-60.19	-13	-47.19
3	284.33	27.96	-95.26	-67.30	-13	-54.30
4	313.93	33.14	-95.26	-62.12	-13	-49.12
5	770.83	31.15	-95.26	-64.11	-13	-51.11
6	917.19	30.25	-95.26	-65.01	-13	-52.01

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	60.34	35.01	-95.26	-60.25	-13	-47.25
2	85.18	34.54	-95.26	-60.72	-13	-47.72
3	166.26	30.32	-95.26	-64.94	-13	-51.94
4	198.78	24.54	-95.26	-70.72	-13	-57.72
5	220.33	32.29	-95.26	-62.97	-13	-49.97
6	843.77	32.16	-95.26	-63.10	-13	-50.10

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

LTE Band 2: 15 MHz

Mode	TX channel 18675	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	206.96	34.17	-95.26	-61.09	-13	-48.09
2	264.73	35.48	-95.26	-59.78	-13	-46.78
3	290.97	28.92	-95.26	-66.34	-13	-53.34
4	313.8	33.25	-95.26	-62.01	-13	-49.01
5	774.17	36.07	-95.26	-59.19	-13	-46.19
6	923.2	34.02	-95.26	-61.24	-13	-48.24
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	60.85	34.07	-95.26	-61.19	-13	-48.19
2	91.2	37.13	-95.26	-58.13	-13	-45.13
3	168.89	32.78	-95.26	-62.48	-13	-49.48
4	205.89	24.58	-95.26	-70.68	-13	-57.68
5	223.44	36.42	-95.26	-58.84	-13	-45.84
6	847.93	37.15	-95.26	-58.11	-13	-45.11

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 18900	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	208.95	36.14	-95.26	-59.12	-13	-46.12
2	272.11	36.36	-95.26	-58.90	-13	-45.90
3	291.32	30.59	-95.26	-64.67	-13	-51.67
4	315.11	34.44	-95.26	-60.82	-13	-47.82
5	775.13	29.73	-95.26	-65.53	-13	-52.53
6	930.14	32.82	-95.26	-62.44	-13	-49.44

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	64.8	39.27	-95.26	-55.99	-13	-42.99
2	90.85	36.44	-95.26	-58.82	-13	-45.82
3	175.19	29.13	-95.26	-66.13	-13	-53.13
4	210.23	25.89	-95.26	-69.37	-13	-56.37
5	231.29	34.2	-95.26	-61.06	-13	-48.06
6	853.04	32.25	-95.26	-63.01	-13	-50.01

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 19125	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	204.81	32.81	-95.26	-62.45	-13	-49.45
2	241.38	33.67	-95.26	-61.59	-13	-48.59
3	268.16	29.69	-95.26	-65.57	-13	-52.57
4	302.48	33.75	-95.26	-61.51	-13	-48.51
5	762.47	33.21	-95.26	-62.05	-13	-49.05
6	910.15	30.37	-95.26	-64.89	-13	-51.89

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	61.37	33.95	-95.26	-61.31	-13	-48.31
2	77.96	34.97	-95.26	-60.29	-13	-47.29
3	154.12	33.02	-95.26	-62.24	-13	-49.24
4	195.57	25.36	-95.26	-69.90	-13	-56.90
5	208.7	36.94	-95.26	-58.32	-13	-45.32
6	842.67	33.55	-95.26	-61.71	-13	-48.71

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

LTE Band 2: 20 MHz

Mode	TX channel 18700	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	199.12	34.04	-95.26	-61.22	-13	-48.22
2	244.44	33.02	-95.26	-62.24	-13	-49.24
3	271.87	29.83	-95.26	-65.43	-13	-52.43
4	307.87	35.87	-95.26	-59.39	-13	-46.39
5	762.14	34.13	-95.26	-61.13	-13	-48.13
6	906.21	34.79	-95.26	-60.47	-13	-47.47
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	54.08	34.54	-95.26	-60.72	-13	-47.72
2	81.99	33.26	-95.26	-62.00	-13	-49.00
3	150.87	34.11	-95.26	-61.15	-13	-48.15
4	191.33	27.35	-95.26	-67.91	-13	-54.91
5	213.74	37.41	-95.26	-57.85	-13	-44.85
6	841.84	36.17	-95.26	-59.09	-13	-46.09

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 18900	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	204.26	34.94	-95.26	-60.32	-13	-47.32
2	248.92	36.13	-95.26	-59.13	-13	-46.13
3	276.51	31.77	-95.26	-63.49	-13	-50.49
4	309.36	37.41	-95.26	-57.85	-13	-44.85
5	769.23	31.62	-95.26	-63.64	-13	-50.64
6	910.59	32.6	-95.26	-62.66	-13	-49.66

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	55.43	37.69	-95.26	-57.57	-13	-44.57
2	86.48	37.22	-95.26	-58.04	-13	-45.04
3	153.35	34.14	-95.26	-61.12	-13	-48.12
4	198.92	28.63	-95.26	-66.63	-13	-53.63
5	217.73	34.16	-95.26	-61.10	-13	-48.10
6	842.35	35.78	-95.26	-59.48	-13	-46.48

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 19100	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	206.07	37.98	-95.26	-57.28	-13	-44.28
2	255.76	35.94	-95.26	-59.32	-13	-46.32
3	277.05	30.24	-95.26	-65.02	-13	-52.02
4	317.08	34.56	-95.26	-60.70	-13	-47.70
5	777.55	30.82	-95.26	-64.44	-13	-51.44
6	912.46	32.06	-95.26	-63.20	-13	-50.20

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	61.99	37.07	-95.26	-58.19	-13	-45.19
2	93.88	38.65	-95.26	-56.61	-13	-43.61
3	158.26	37.75	-95.26	-57.51	-13	-44.51
4	202.71	29.75	-95.26	-65.51	-13	-52.51
5	217.55	38.05	-95.26	-57.21	-13	-44.21
6	848.14	35.81	-95.26	-59.45	-13	-46.45

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Above 1GHz

WCDMA B2:

Mode	TX channel 9262	Frequency Range	Above 1000 MHz
------	-----------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3704.8	37.4	-95.26	-57.86	-13	-44.86
2	5557.2	44.71	-95.26	-50.55	-13	-37.55
3	7409.6	62.32	-95.26	-32.94	-13	-19.94
4	9262	60.38	-95.26	-34.88	-13	-21.88
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3704.8	38.91	-95.26	-56.35	-13	-43.35
2	5557.2	47.28	-95.26	-47.98	-13	-34.98
3	7409.6	66.42	-95.26	-28.84	-13	-15.84
4	9262	63.01	-95.26	-32.25	-13	-19.25

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m.

Mode	TX channel 9400	Frequency Range	Above 1000 MHz
------	-----------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760	34.69	-95.26	-60.57	-13	-47.57
2	5640	46.17	-95.26	-49.09	-13	-36.09
3	7520	60.31	-95.26	-34.95	-13	-21.95
4	9400	58.12	-95.26	-37.14	-13	-24.14
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760	36.62	-95.26	-58.64	-13	-45.64
2	5640	50.28	-95.26	-44.98	-13	-31.98
3	7520	67.32	-95.26	-27.94	-13	-14.94
4	9400	62.03	-95.26	-33.23	-13	-20.23

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 9538	Frequency Range	Above 1000 MHz
------	-----------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3815.2	35.82	-95.26	-59.44	-13	-46.44
2	5722.8	44.74	-95.26	-50.52	-13	-37.52
3	7630.4	65.12	-95.26	-30.14	-13	-17.14
4	9538	55.79	-95.26	-39.47	-13	-26.47
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3815.2	38.44	-95.26	-56.82	-13	-43.82
2	5722.8	45.46	-95.26	-49.80	-13	-36.80
3	7630.4	67.82	-95.26	-27.44	-13	-14.44
4	9538	57.77	-95.26	-37.49	-13	-24.49

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

LTE Band 2: 1.4 MHz

Mode	TX channel 18607	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3701.4	39.96	-95.26	-55.30	-13	-42.30
2	5552.1	45.78	-95.26	-49.48	-13	-36.48
3	7402.8	66.71	-95.26	-28.55	-13	-15.55
4	9253.5	59.56	-95.26	-35.70	-13	-22.70
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3701.4	41.39	-95.26	-53.87	-13	-40.87
2	5552.1	46.51	-95.26	-48.75	-13	-35.75
3	7402.8	68.56	-95.26	-26.70	-13	-13.70
4	9253.5	66.15	-95.26	-29.11	-13	-16.11

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 18900	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760	40.35	-95.26	-54.91	-13	-41.91
2	5640	45.85	-95.26	-49.41	-13	-36.41
3	7520	67.5	-95.26	-27.76	-13	-14.76
4	9400	59.11	-95.26	-36.15	-13	-23.15

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760	41.48	-95.26	-53.78	-13	-40.78
2	5640	49.27	-95.26	-45.99	-13	-32.99
3	7520	69.02	-95.26	-26.24	-13	-13.24
4	9400	66.27	-95.26	-28.99	-13	-15.99

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 19193	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3818.6	37.63	-95.26	-57.63	-13	-44.63
2	5727.9	46.77	-95.26	-48.49	-13	-35.49
3	7637.2	66.31	-95.26	-28.95	-13	-15.95
4	9546.5	61.06	-95.26	-34.20	-13	-21.20
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3818.6	38.63	-95.26	-56.63	-13	-43.63
2	5727.9	46.82	-95.26	-48.44	-13	-35.44
3	7637.2	67.4	-95.26	-27.86	-13	-14.86
4	9546.5	63.85	-95.26	-31.41	-13	-18.41

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

LTE Band 2: 3 MHz

Mode	TX channel 18615	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3703	37.01	-95.26	-58.25	-13	-45.25
2	5554.5	44.88	-95.26	-50.38	-13	-37.38
3	7406	64.88	-95.26	-30.38	-13	-17.38
4	9257.5	59.84	-95.26	-35.42	-13	-22.42
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3703	38.05	-95.26	-57.21	-13	-44.21
2	5554.5	48.06	-95.26	-47.20	-13	-34.20
3	7406	67.46	-95.26	-27.80	-13	-14.80
4	9257.5	63.74	-95.26	-31.52	-13	-18.52

Remarks:

- Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
- Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 18900	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760	39.45	-95.26	-55.81	-13	-42.81
2	5640	45.18	-95.26	-50.08	-13	-37.08
3	7520	65.28	-95.26	-29.98	-13	-16.98
4	9400	60.58	-95.26	-34.68	-13	-21.68

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760	40.23	-95.26	-55.03	-13	-42.03
2	5640	45.7	-95.26	-49.56	-13	-36.56
3	7520	68.78	-95.26	-26.48	-13	-13.48
4	9400	63.24	-95.26	-32.02	-13	-19.02

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 19185	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3817	38.6	-95.26	-56.66	-13	-43.66
2	5725.5	45.47	-95.26	-49.79	-13	-36.79
3	7634	65.42	-95.26	-29.84	-13	-16.84
4	9542.5	60.8	-95.26	-34.46	-13	-21.46
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3817	38.97	-95.26	-56.29	-13	-43.29
2	5725.5	46.08	-95.26	-49.18	-13	-36.18
3	7634	68.4	-95.26	-26.86	-13	-13.86
4	9542.5	66.02	-95.26	-29.24	-13	-16.24

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

LTE Band 2: 5 MHz

Mode	TX channel 18625	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3705	37.5	-95.26	-57.76	-13	-44.76
2	5557.5	42.95	-95.26	-52.31	-13	-39.31
3	7410	66.12	-95.26	-29.14	-13	-16.14
4	9262.5	62.69	-95.26	-32.57	-13	-19.57
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3705	40.2	-95.26	-55.06	-13	-42.06
2	5557.5	48.66	-95.26	-46.60	-13	-33.60
3	7410	67.45	-95.26	-27.81	-13	-14.81
4	9262.5	62.21	-95.26	-33.05	-13	-20.05

Remarks:

- Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
- Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 18900	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760	38.91	-95.26	-56.35	-13	-43.35
2	5640	42.95	-95.26	-52.31	-13	-39.31
3	7520	65.32	-95.26	-29.94	-13	-16.94
4	9400	62.51	-95.26	-32.75	-13	-19.75
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760	42.1	-95.26	-53.16	-13	-40.16
2	5640	47.48	-95.26	-47.78	-13	-34.78
3	7520	67.4	-95.26	-27.86	-13	-14.86
4	9400	63.17	-95.26	-32.09	-13	-19.09

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 19175	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3815	36.46	-95.26	-58.80	-13	-45.80
2	5722.5	45.35	-95.26	-49.91	-13	-36.91
3	7630	65.43	-95.26	-29.83	-13	-16.83
4	9537.5	61.47	-95.26	-33.79	-13	-20.79
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3815	40.09	-95.26	-55.17	-13	-42.17
2	5722.5	45.17	-95.26	-50.09	-13	-37.09
3	7630	67.8	-95.26	-27.46	-13	-14.46
4	9537.5	66.8	-95.26	-28.46	-13	-15.46

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

LTE Band 2: 10 MHz

Mode	TX channel 18650	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3710	44.08	-95.26	-51.18	-13	-38.18
2	5565	46.15	-95.26	-49.11	-13	-36.11
3	7420	66.7	-95.26	-28.56	-13	-15.56
4	9275	63.88	-95.26	-31.38	-13	-18.38
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3710	39.68	-95.26	-55.58	-13	-42.58
2	5565	46.04	-95.26	-49.22	-13	-36.22
3	7420	68.3	-95.26	-26.96	-13	-13.96
4	9275	63.52	-95.26	-31.74	-13	-18.74

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 18900	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760	37.39	-95.26	-57.87	-13	-44.87
2	5640	45.01	-95.26	-50.25	-13	-37.25
3	7520	65.3	-95.26	-29.96	-13	-16.96
4	9400	59.56	-95.26	-35.70	-13	-22.70
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760	41.8	-95.26	-53.46	-13	-40.46
2	5640	46.01	-95.26	-49.25	-13	-36.25
3	7520	68.9	-95.26	-26.36	-13	-13.36
4	9400	62.88	-95.26	-32.38	-13	-19.38

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 19150	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3810	40.89	-95.26	-54.37	-13	-41.37
2	5715	41.45	-95.26	-53.81	-13	-40.81
3	7620	63.25	-95.26	-32.01	-13	-19.01
4	9525	61.93	-95.26	-33.33	-13	-20.33
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3810	41.3	-95.26	-53.96	-13	-40.96
2	5715	46.82	-95.26	-48.44	-13	-35.44
3	7620	67.18	-95.26	-28.08	-13	-15.08
4	9525	62.83	-95.26	-32.43	-13	-19.43

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

LTE Band 2: 15 MHz

Mode	TX channel 18675	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3715	38.79	-95.26	-56.47	-13	-43.47
2	5572.5	44.25	-95.26	-51.01	-13	-38.01
3	7430	63.11	-95.26	-32.15	-13	-19.15
4	9287.5	62.22	-95.26	-33.04	-13	-20.04
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3715	41.76	-95.26	-53.50	-13	-40.50
2	5572.5	47.64	-95.26	-47.62	-13	-34.62
3	7430	65.12	-95.26	-30.14	-13	-17.14
4	9287.5	63.01	-95.26	-32.25	-13	-19.25

Remarks:

- Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
- Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 18900	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760	40.93	-95.26	-54.33	-13	-41.33
2	5640	43.13	-95.26	-52.13	-13	-39.13
3	7520	64	-95.26	-31.26	-13	-18.26
4	9400	59.77	-95.26	-35.49	-13	-22.49
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760	39.22	-95.26	-56.04	-13	-43.04
2	5640	49.04	-95.26	-46.22	-13	-33.22
3	7520	66.52	-95.26	-28.74	-13	-15.74
4	9400	64.71	-95.26	-30.55	-13	-17.55

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 19125	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3805	38.68	-95.26	-56.58	-13	-43.58
2	5707.5	42.75	-95.26	-52.51	-13	-39.51
3	7610	65.53	-95.26	-29.73	-13	-16.73
4	9512.5	62.85	-95.26	-32.41	-13	-19.41
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3805	38.3	-95.26	-56.96	-13	-43.96
2	5707.5	48.56	-95.26	-46.70	-13	-33.70
3	7610	67.15	-95.26	-28.11	-13	-15.11
4	9512.5	65.51	-95.26	-29.75	-13	-16.75

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

LTE Band 2: 20 MHz

Mode	TX channel 18700	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3720	39.99	-95.26	-55.27	-13	-42.27
2	5580	45.73	-95.26	-49.53	-13	-36.53
3	7440	64.47	-95.26	-30.79	-13	-17.79
4	9300	58.58	-95.26	-36.68	-13	-23.68
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3720	39.25	-95.26	-56.01	-13	-43.01
2	5580	50.56	-95.26	-44.70	-13	-31.70
3	7440	67.55	-95.26	-27.71	-13	-14.71
4	9300	62.5	-95.26	-32.76	-13	-19.76

Remarks:

- Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
- Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 18900	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760	41.15	-95.26	-54.11	-13	-41.11
2	5640	43	-95.26	-52.26	-13	-39.26
3	7520	64.29	-95.26	-30.97	-13	-17.97
4	9400	56.61	-95.26	-38.65	-13	-25.65
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760	37.76	-95.26	-57.50	-13	-44.50
2	5640	46.69	-95.26	-48.57	-13	-35.57
3	7520	67.81	-95.26	-27.45	-13	-14.45
4	9400	59.89	-95.26	-35.37	-13	-22.37

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 19100	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3800	38.27	-95.26	-56.99	-13	-43.99
2	5700	43.05	-95.26	-52.21	-13	-39.21
3	7600	63.24	-95.26	-32.02	-13	-19.02
4	9500	59.75	-95.26	-35.51	-13	-22.51
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3800	40.44	-95.26	-54.82	-13	-41.82
2	5700	46.27	-95.26	-48.99	-13	-35.99
3	7600	67.94	-95.26	-27.32	-13	-14.32
4	9500	62.67	-95.26	-32.59	-13	-19.59

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---