

FCC/ISED

RF

TEST REPORT

ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR

Fully Rugged Windows Tablet

ISSUED TO
Shenzhen UniStrong Science & Technology Co., Ltd.

B, 4-4Factory, Zhengcheng Road, Fuyong Baoan District, Shenzhen,
China



Tested by:

Zou Liu

Zou Liu
(Engineer)

Date

May 08, 2018

Approved by:

Wei Yanquan
(Chief Engineer)

Date

May 08, 2018

Report No.: BL-EC1830163-601
EUT Name: Fully Rugged Windows Tablet
Model Name: UT50
Brand Name: UniStrong
Test Standard: 47 CFR Part 15 Subpart C
RSS-Gen (Issue 4, November 2014)
RSS-247 (Issue 2, February 2017)
FCC ID: 2AOPD-UT50
ISED Number: 11546A-UT50
Test conclusion: Pass
Test Date: Apr. 10, 2018 ~ May 04, 2018
Date of Issue: May 08, 2018

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. BALUN Laboratory. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Apr. 20, 2018</u>	<u>Initial Issue</u>
<u>Rev. 02</u>	<u>May 08, 2018</u>	<u>Update the data of the conduction part other than power.</u>

TABLE OF CONTENTS

1	ADMINISTRATIVE DATA (GENERAL INFORMATION)	5
1.1	Identification of the Testing Laboratory	5
1.2	Identification of the Responsible Testing Location	5
1.3	Laboratory Condition	5
1.4	Announce	5
2	PRODUCT INFORMATION	6
2.1	Applicant Information.....	6
2.2	Manufacturer Information	6
2.3	Factory Information	6
2.4	General Description for Equipment under Test (EUT)	6
2.5	Ancillary Equipment.....	6
2.6	Technical Information	7
2.7	Additional Instructions	9
3	SUMMARY OF TEST RESULTS.....	10
3.1	Test Standards	10
3.2	Verdict	11
4	GENERAL TEST CONFIGURATIONS	12
4.1	Test Environments	12
4.2	Test Equipment List.....	12
4.3	Measurement Uncertainty	13
4.4	Description of Test Setup	14
4.4.1	For Antenna Port Test	14
4.4.2	For AC Power Supply Port Test	14
4.4.3	For Radiated Test (Below 30 MHz)	15
4.4.4	For Radiated Test (30 MHz-1 GHz)	15
4.4.5	For Radiated Test (Above 1 GHz).....	16

4.5	Measurement Results Explanation Example.....	17
4.5.1	For conducted test items:	17
4.5.2	For radiated band edges and spurious emission test:.....	17
5	TEST ITEMS.....	18
5.1	Antenna Requirements.....	18
5.1.1	Relevant Standards.....	18
5.1.2	Antenna Anti-Replacement Construction	18
5.1.3	Antenna Gain	18
5.2	Number of Hopping Frequencies	19
5.2.1	Limit.....	19
5.2.2	Test Setup	19
5.2.3	Test Procedure.....	19
5.2.4	Test Result	19
5.3	Peak Output Power and E.I.R.P.....	20
5.3.1	Test Limit.....	20
5.3.2	Test Setup	20
5.3.3	Test Procedure.....	20
5.3.4	Test Result	20
5.4	Occupied Bandwidth	21
5.4.1	Limit.....	21
5.4.2	Test Setup	21
5.4.3	Test Procedure.....	21
5.4.4	Test Result	21
5.5	Carrier Frequency Separation	22
5.5.1	Limit.....	22
5.5.2	Test Setup	22
5.5.3	Test Procedure.....	22
5.5.4	Test Result	22
5.6	Time of Occupancy (Dwell time)	23
5.6.1	Limit.....	23
5.6.2	Test Setup	23
5.6.3	Test Procedure.....	23
5.6.4	Test Result	23

5.7	Conducted Spurious Emission & Authorized-band band-edge	24
5.7.1	Limit.....	24
5.7.2	Test Setup	24
5.7.3	Test Procedure	24
5.7.4	Test Result	24
5.8	Conducted Emission	25
5.8.1	Limit.....	25
5.8.2	Test Setup	25
5.8.3	Test Procedure	25
5.8.4	Test Result	25
5.9	Radiated Spurious Emission	26
5.9.1	Limit.....	26
5.9.2	Test Setup	26
5.9.3	Test Procedure	26
5.9.4	Test Result	27
5.10	Band Edge (Restricted-band band-edge).....	28
5.10.1	Limit.....	28
5.10.2	Test Setup	28
5.10.3	Test Procedure	28
5.10.4	Test Result	28
ANNEX A	TEST RESULT	29
A.1	Number of Hopping Frequency	29
A.2	Peak Output Power and E.I.R.P.....	30
A.3	20 dB and 99% bandwidth	33
A.4	Hopping Frequency Separation.....	36
A.5	Average Time of Occupancy	37
A.6	Conducted Spurious Emissions & Authorized-band band-edge	39
A.7	Conducted Emissions.....	46
A.8	Radiated Spurious Emission	48
A.9	Band Edge (Restricted-band band-edge).....	82
ANNEX B	TEST SETUP PHOTOS	94
ANNEX C	EUT EXTERNAL PHOTOS	94
ANNEX D	EUT INTERNAL PHOTOS	94

1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1. The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196. The laboratory is a testing organization accredited by American Association for Laboratory Accreditation(A2LA) according to ISO/IEC 17025.The accreditation certificate is 4344.01. The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Laboratory Condition

Ambient Temperature	20°C to 25°C
Ambient Relative Humidity	45% to 55%
Ambient Pressure	100 kPa to 102 kPa

1.4 Announce

- (1) The test report reference to the report template version v5.8.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Shenzhen UniStrong Science & Technology Co.,Ltd.
Address	B, 4-4Factory, Zhengcheng Road, Fuyong Baoan District, Shenzhen, China

2.2 Manufacturer Information

Manufacturer	Shenzhen UniStrong Science & Technology Co.,Ltd.
Address	B, 4-4Factory, Zhengcheng Road, Fuyong Baoan District, Shenzhen, China

2.3 Factory Information

Factory	N/A
Address	N/A

2.4 General Description for Equipment under Test (EUT)

EUT Name	Fully Rugged Windows Tablet
Under Test Model Name	UT50
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	V4.0
Software Version	BIOS: R.AA.00.03.00/EC: R.AA.00.03.00/OS: R.AA.00.30.00
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.5 Ancillary Equipment

Ancillary Equipment 1	Battery	
	Brand Name	SJYEnergy
	Model No.	BA900
	Serial No.	N/A
	Capacity	2900 mAh
	Rated Voltage	11.4 V
	Limit Charge Voltage	13.05 V
Ancillary Equipment 2	Adapter	
	Brand Name	AK
	Model No.	AK65WG-1900342W1
	Serial No.	N/A
	Rated Input	100-240 V~, 1.5 A, 50/60 Hz
	Rated Output	19 V= 3.42 A
Ancillary Equipment 3	USB Cable	
	Model No.	N/A
	Length (Approx.)	0.8 m

2.6 Technical Information

Network and Wireless connectivity	3G Network WCDMA/HSDPA/HSUPA Band 1/2/3/4/5/8 4G Network FDD LTE Band 1/2/3/4/5/7/8/12/13/20/25/26/30 TDD LTE Band 41 Bluetooth 4.0 (BR+EDR+BLE) WIFI 802.11a, 802.11b, 802.11g, 802.11n(HT20/40) and 802.11ac NFC, GPS, GLONASS, BDS
-----------------------------------	--

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	FHSS
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Product Type	☐ Mobile ☒ Portable ☐ Fix Location
Transfer Rate	DH5: 1 Mbps 2DH5: 2 Mbps 3DH5: 3 Mbps
Frequency Range	The frequency range used is 2400 MHz to 2483.5 MHz.
Number of channel	79 (at intervals of 1 MHz)
Tested Channel	0 (2402 MHz), 39 (2441 MHz), 78 (2480 MHz)
Antenna Type	FPC+Cable Antenna
Antenna Gain	1.57 dBi (In test items related to antenna gain, the final results reflect this figure.)
Antenna System(MIMO Smart Antenna)	N/A

All channel was listed on the following table:

Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)
0	2402	21	2423	42	2444	63	2465
1	2403	22	2424	43	2445	64	2466
2	2404	23	2425	44	2446	65	2467
3	2405	24	2426	45	2447	66	2468
4	2406	25	2427	46	2448	67	2469
5	2407	26	2428	47	2449	68	2470
6	2408	27	2429	48	2450	69	2471
7	2409	28	2430	49	2451	70	2472
8	2410	29	2431	50	2452	71	2473
9	2411	30	2432	51	2453	72	2474
10	2412	31	2433	52	2454	73	2475
11	2413	32	2434	53	2455	74	2476
12	2414	33	2435	54	2456	75	2477
13	2415	34	2436	55	2457	76	2478
14	2416	35	2437	56	2458	77	2479
15	2417	36	2438	57	2459	78	2480
16	2418	37	2439	58	2460	-	-
17	2419	38	2440	59	2461	-	-
18	2420	39	2441	60	2462	-	-
19	2421	40	2442	61	2463	-	-
20	2422	41	2443	62	2464	-	-


2.7 Additional Instructions

EUT Software Settings:

Mode	☒ Bluetooth test mode loop back enabled. EUT is controlled over CBT / CMU.
------	---

Power level setup in software			
Test Software Version	DRTU		
Mode	Channel	Frequency (MHz)	Soft Set
DH5	CH0	2402	TX LEVEL is built-in set parameters and cannot be changed and selected.
	CH39	2441	
	CH78	2480	
2DH5	CH0	2402	
	CH39	2441	
	CH78	2480	
3DH5	CH0	2402	
	CH39	2441	
	CH78	2480	

Run Software:

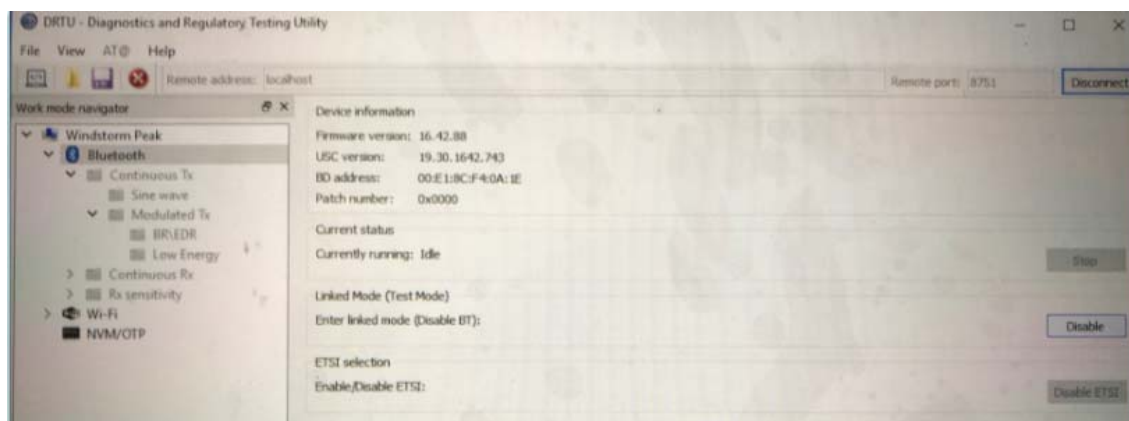

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C (10-1-16 Edition)	Miscellaneous Wireless Communications Services
2	FCC PUBLIC NOTICE DA 00-705 (Mar. 30, 2000)	Filling and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems
3	RSS-Gen (Issue 4, Nov. 2014)	General Requirements for Compliance of Radio Apparatus
4	RSS-247 (Issue 2, February 2017)	Digital Transmission Systems (DTSS), Frequency Hopping Systems(FHSS) and Licence-Exemp Local Area Network (LE-LAN) Devices
5	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

3.2 Verdict

No.	Description	FCC Part No.	ISED Part No.	Channel	Test Result	Verdict	Remark
1	Antenna Requirement	15.203	RSS-247, 5.4 (6)	N/A	--	Pass	Note ¹
2	Number of Hopping Frequencies	15.247(a)	RSS-247, 5.1 (4)	Hopping Mode	ANNEX A.1	Pass	Note ²
3	Peak Output Power and E.I.R.P	15.247(b)	RSS-247, 5.4 (2)	Low/Middle/High	ANNEX A.2	Pass	--
4	Occupied Bandwidth	15.247(a)	RSS-247, 5.1 (1)	Low/Middle/High	ANNEX A.3	Pass	Note ²
5	Carrier Frequency Separation	15.247(a)	RSS-247, 5.1 (2)	Hopping Mode	ANNEX A.4	Pass	Note ²
6	Time of Occupancy (Dwell time)	15.247(a)	RSS-247, 5.1 (4)	Hopping Mode	ANNEX A.5	Pass	Note ²
7	Conducted Spurious Emission & Authorized-band band-edge	15.247(d)	RSS-247, 5.5	Low/Middle/High	ANNEX A.6	Pass	Note ²
8	Conducted Emission	15.207	RSS-GEN, 8.8	Low/Middle/High	ANNEX A.7	Pass	Note ²
9	Radiated Spurious Emission	15.209 15.247(d)	RSS-247, 5.5	Hopping Mode, Low/Middle/High	ANNEX A.8	Pass	Note ²
10	Band Edge(Restricted-band band-edge)	15.209 15.247(d)	RSS-247, 5.5	Hopping Mode, Low/Middle/High	ANNEX A.9	Pass	Note ²
11	Receiver Spurious Emissions	--	RSS-Gen, 7.1.2	--	--	N/A	Note ³

Note ¹: Please refer to section 5.1

Note ²: Because of the modulation of $\Pi/4$ -DQPSK same as 8-DPSK, and the test results are basically the same with them, so we chose 8-DPSK as a typical representative to appear on the report. Another we will show all the modes on the RF output power test item

Note ³: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% to 55%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	11.4 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-30	103118	2017.06.12	2018.06.11
Switch Unit with OSP-B157	ROHDE&SCHWARZ	OSP120	101270	2017.06.12	2018.06.11
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2017.09.07	2018.09.06
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2017.06.22	2018.06.21
LISN	SCHWARZBECK	NSLK 8127	8127-687	2017.06.22	2018.06.21
Bluetooth Tester	ROHDE&SCHWARZ	CBT	101005	2017.06.12	2018.06.11
Power Splitter	KMW	DCPD-LDC	1305003215	--	--
Power Sensor	ROHDE&SCHWARZ	NRP-Z21	103971	2017.06.12	2018.06.11
Attenuator (20 dB)	KMW	ZA-S1-201	110617091	--	--
Attenuator (6 dB)	KMW	ZA-S1-61	1305003189	--	--
DC Power Supply	ROHDE&SCHWARZ	HMP2020	018141664	2017.06.22	2018.06.21
Temperature Chamber	ANGELANTIONI SCIENCE	NTH64-40A	1310	2017.06.27	2018.06.26
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2017.11.07	2019.11.08
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2017.07.22	2019.07.21
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1148	2016.07.12	2018.07.11
Test Antenna-Horn(15-26.5 GHz)	SCHWARZBECK	BBHA 9170	9170-305	2017.06.22	2018.06.21
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400KF	J211060273	N/A	2019.01.05
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2019.02.20
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	N/A	2016.08.09	2018.08.08
Shielded Enclosure	ChangNing	CN-130701	130703	--	--
Signal Generator	ROHDE&SCHWARZ	SMB100A	177746	2017.06.12	2018.06.11
Power Amplifier	OPHIR RF	5225F	1037	2018.02.16	2019.02.15
Power Amplifier	OPHIR RF	5273F	1016	2018.02.16	2019.02.15
Directional Coupler	Werlantone	C5982-10	109275	N/A	N/A
Directional Coupler	Werlantone	CHP-273E	S00801z-01	N/A	N/A

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Feld Strength Meter	Narda	EP601	511WX5112 9	2017.05.22	2018.05.21
Mouth Simulator	B&K	4227	2423931	2017.11.16	2018.11.15
Sound Calibrator	B&K	4231	2430337	2017.11.16	2018.11.15
Sound Level Meter	B&K	NL-20	00844023	2017.11.16	2018.11.15
Ear Simulator	B&K	4185	2409449	2017.11.16	2018.11.15
Ear Simulator	B&K	4195	2418189	2017.11.16	2018.11.15
Audio analyzer	B&K	UPL 16	100129	2017.11.16	2018.11.15

4.3 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Occupied Channel Bandwidth	$\pm 4\%$
RF output power, conducted	± 1.4 dB
Power Spectral Density, conducted	± 2.5 dB
Unwanted Emissions, conducted	± 2.8 dB
All emissions, radiated	± 5.4 dB
Temperature	$\pm 1^{\circ}\text{C}$
Humidity	$\pm 4\%$


4.4 Description of Test Setup

4.4.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

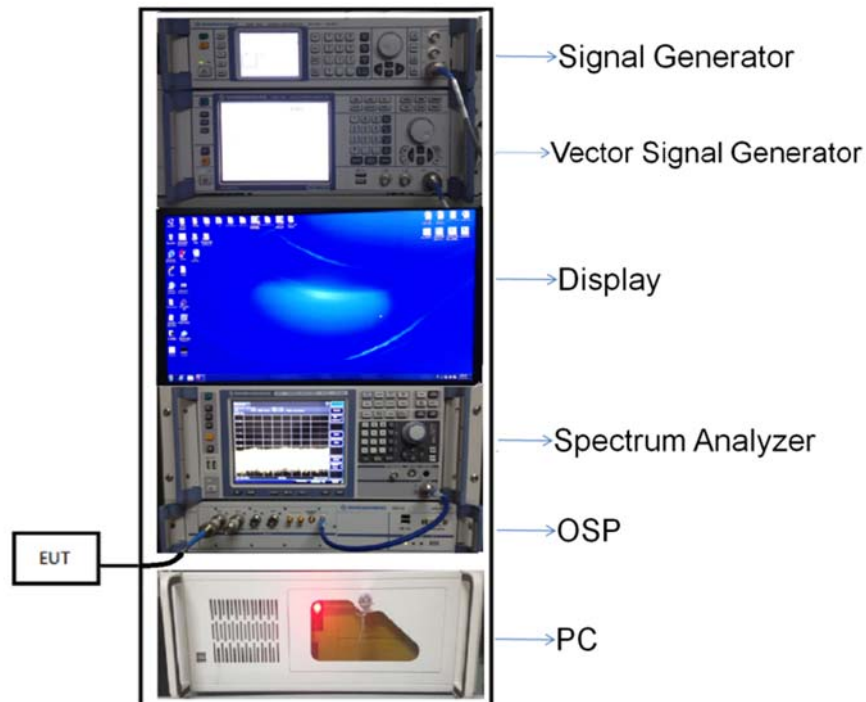


(Diagram 1)

4.4.2 For AC Power Supply Port Test

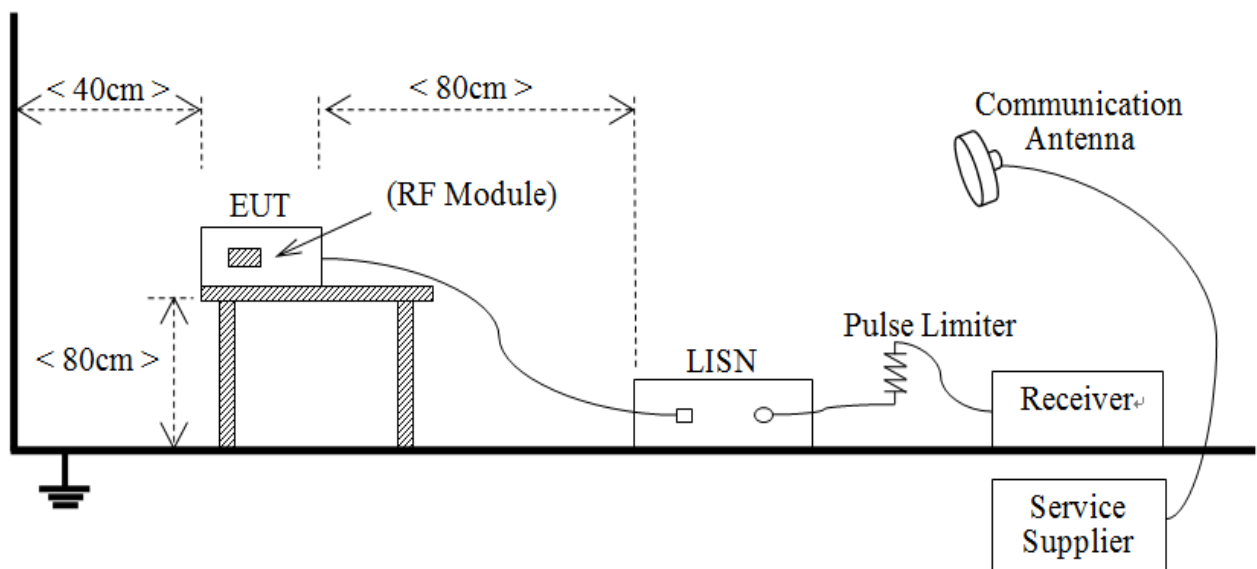


(Diagram 2)

4.4.3 For Radiated Test (Below 30 MHz)

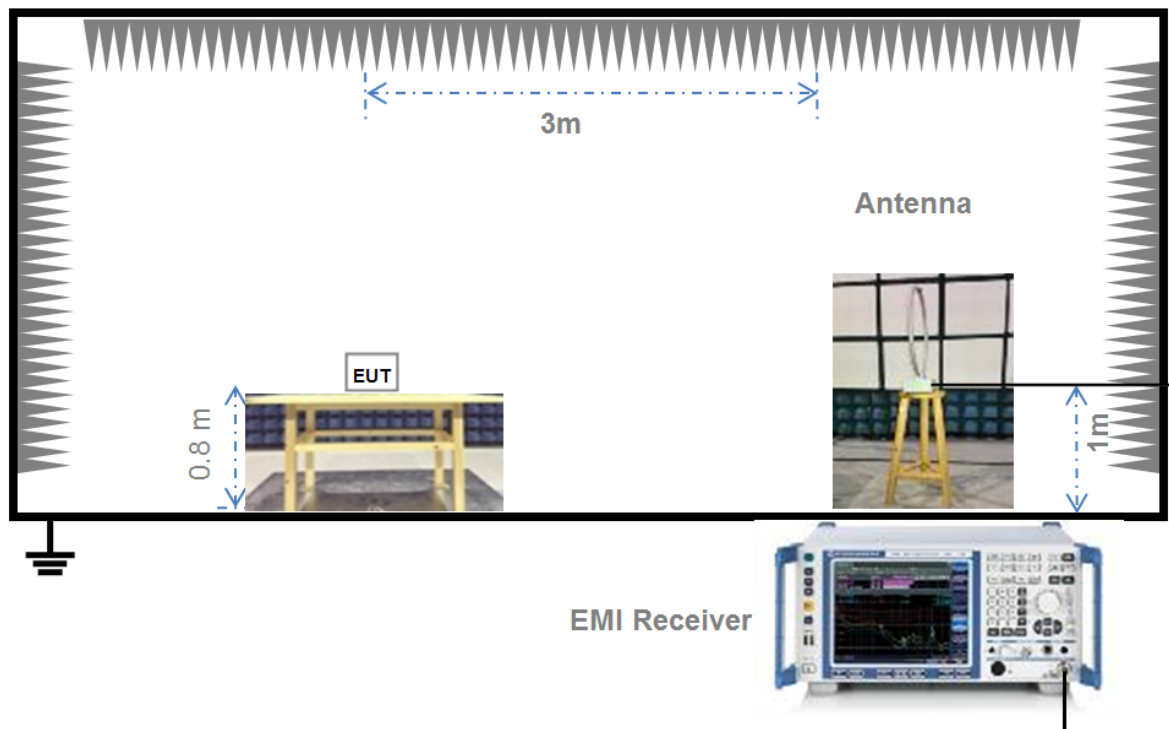


(Diagram 3)

4.4.4 For Radiated Test (30 MHz-1 GHz)

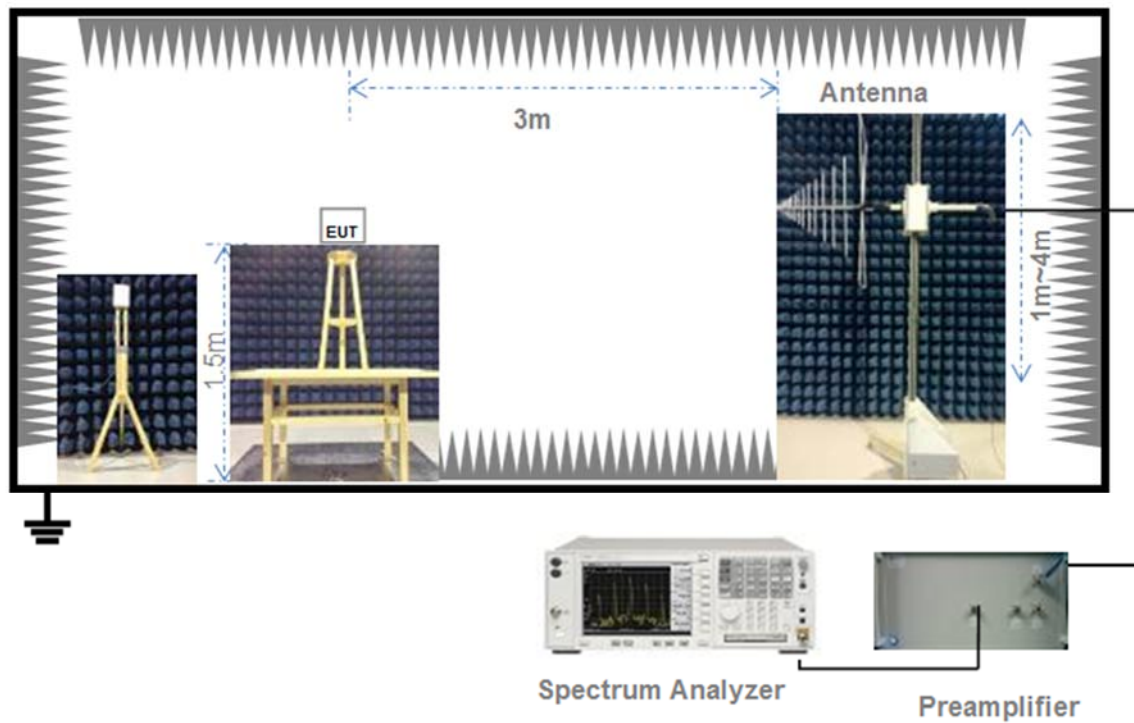

(Diagram 4)

4.4.5 For Radiated Test (Above 1 GHz)

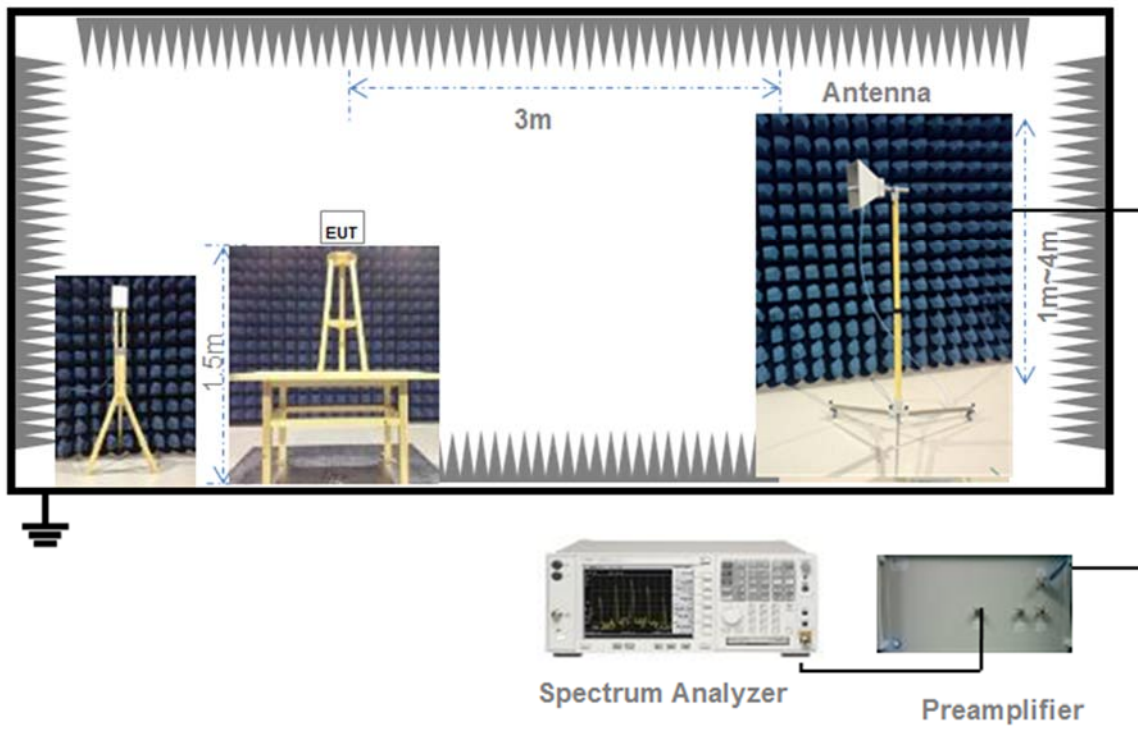

(Diagram 5)

4.5 Measurement Results Explanation Example

4.5.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

4.5.2 For radiated band edges and spurious emission test:

Per part 15.35(c), the EUT Bluetooth average emission level could be determined by the peak emission level applying duty cycle correction factor, to represent averaging over the whole pulse train.

The average level is derived from the peak level corrected with "Duty cycle correction factor".

Average Emission Level (dBuV/m) = Peak Emission Level (dBuV/m) + Duty cycle correction factor (dB)

Duty cycle correction factor (dB) = $20 * \log (\text{Duty cycle})$.

Duty cycle = on time / 100 milliseconds

On time = dwell time * hopping number in 100 ms

For example: bluetooth with dwell time 2.9 ms and 3 hops in 100 ms, then

Duty cycle correction factor (dB) = $20 * \log ((2.9 * 3) / 100) = -21.21 \text{ dB}$

Following shows an average computation example with duty cycle correction factor = -21.21 dB, and the peak emission level is 45.61 dBuV/m.

Example:

Average Emission Level (dBuV/m) = Peak Emission Level (dBuV/m) + duty cycle correction factor (dB)

= $45.61 + (-21.21) = 24.4 \text{ (dBuV/m)}$

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.247(b); RSS-247, 5.4 (6)


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	The antenna is welded on the mainboard, can't be replaced by the consumer

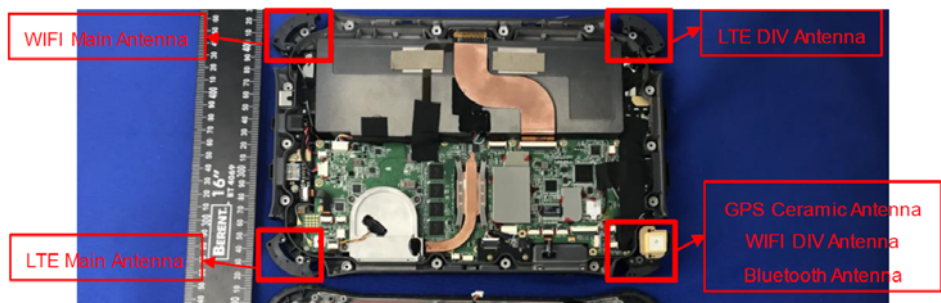Reference Documents	Item
Photo	

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Number of Hopping Frequencies

5.2.1 Limit

FCC §15.247(a) (1) (iii); RSS-247, 5.1 (4)

Frequency hopping systems operating in the 2400 MHz to 2483.5 MHz bands shall use at least 15 hopping frequencies.

5.2.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW $\geq$ 1% of the span

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.2.4 Test Result

Please refer to ANNEX A.1.

5.3 Peak Output Power and E.I.R.P

5.3.1 Test Limit

FCC § 15.247(b)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

RSS-247, 5.4 (2)

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W and the e.i.r.p. shall not exceed 4 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W and the e.i.r.p. shall not exceed 0.5 W if the hopset uses less than 75 hopping channels (see Section 5.4(5) for exceptions).

5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

The Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

5.3.4 Test Result

Please refer to ANNEX A.2.

5.4 Occupied Bandwidth

5.4.1 Limit

FCC §15.247(a); RSS-247, 5.1 (1)

Measurement of the 20dB bandwidth of the modulated signal.

5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW = in the range of 1% to 5% of the OBW

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate, Allow the trace to stabilize.

5.4.4 Test Result

Please refer to ANNEX A.3.

5.5 Carrier Frequency Separation

5.5.1 Limit

FCC §15.247(a); RSS-247, 5.1 (2)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

5.5.4 Test Result

Please refer to ANNEX A.4.

5.6 Time of Occupancy (Dwell time)

5.6.1 Limit

FCC §15.247(a); RSS-247, 5.1 (4)

Frequency hopping systems in the 2400 MHz - 2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

5.6.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The average time of occupancy on any channel within the Period can be calculated with formulas:

For DH1 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 2) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For DH3 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 4) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For DH5 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

5.6.4 Test Result

Please refer to ANNEX A.5

5.7 Conducted Spurious Emission & Authorized-band band-edge

5.7.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.7.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.7.4 Test Result

Please refer to ANNEX A.6.

5.8 Conducted Emission

5.8.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.8.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.8.4 Test Result

Please refer to ANNEX A.7.

5.9 Radiated Spurious Emission

5.9.1 Limit

FCC §15.209&15.247(d); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	$2400/F(\text{kHz})$	300
0.490 - 1.705	$24000/F(\text{kHz})$	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength ($\text{dB}\mu\text{V/m}$) = $20 \cdot \log[\text{Field Strength } (\mu\text{V/m})]$.
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: $54\text{dB}\mu\text{V/m}@3\text{m}$ (AV) and $74\text{dB}\mu\text{V/m}@3\text{m}$ (PK).

5.9.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360° , and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1 \text{ GHz}$, 100 kHz for $f < 1 \text{ GHz}$

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.9.4 Test Result

Please refer to ANNEX A.8.

5.10 Band Edge (Restricted-band band-edge)

5.10.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.10.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.10.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.10.4 Test Result

Please refer to ANNEX A.9.

ANNEX A TEST RESULT


A.1 Number of Hopping Frequency

Test Data


Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	79	15	Pass
8-DPSK	2400 - 2483.5	79	15	Pass

Test plots


GFSK 2.4 GHz ~ 2.4415 GHz

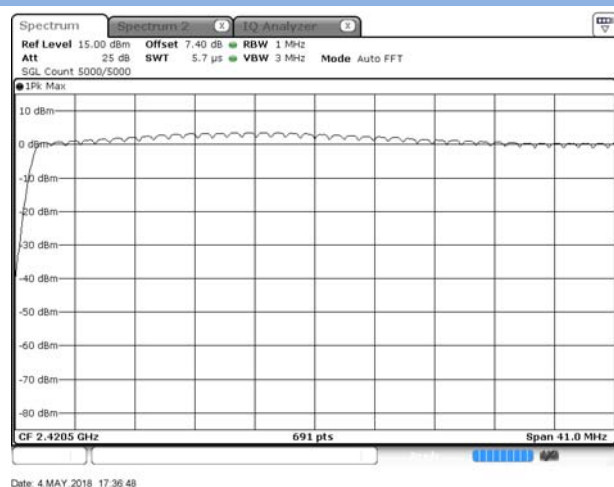


GFSK 2.4415 GHz ~ 2.4835 GHz

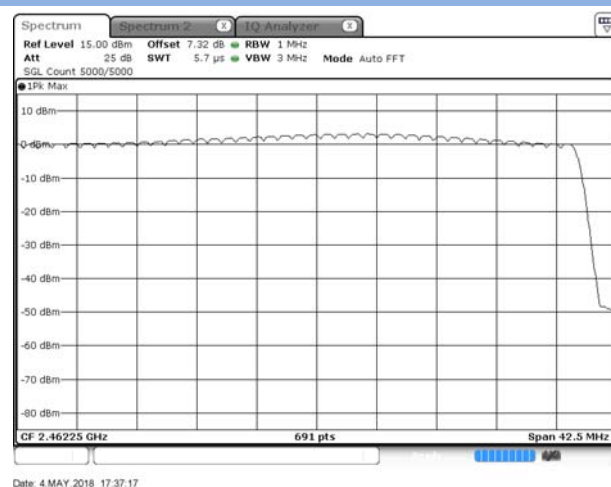

8-DPSK 2.4 GHz ~ 2.4415 GHz

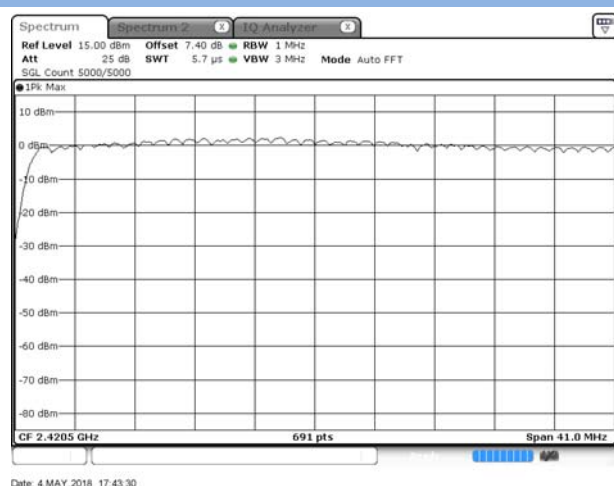

8-DPSK 2.4415 GHz ~ 2.4835 GHz

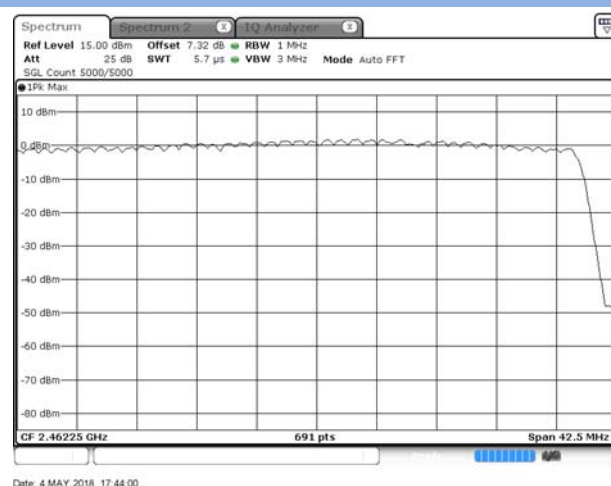

A.2 Peak Output Power and E.I.R.P

Peak Power Test Data

Channel	Measured Output Peak Power		Limit		Verdict
	GFSK		dBm	mW	
	dBm	mW			
Low	3.71	2.35	30	1000	Pass
Middle	3.53	2.25			Pass
High	2.90	1.95			Pass


Channel	Measured Output Peak Power				Limit		Verdict
	π/4-DQPSK		8-DPSK		dBm	mW	
	dBm	mW	dBm	mW			
Low	1.28	1.34	0.27	1.06	21	125	Pass
Middle	0.10	1.02	0.10	1.02			Pass
High	0.44	1.11	-0.57	0.88			Pass

E.I.R.P Test Data (For ISED)

Channel	E.I.R.P						Limit		Verdict
	GFSK		π/4-DQPSK		8-DPSK		dBm	mW	
	dBm	mW	dBm	mW	dBm	mW			
Low	5.28	3.37	2.85	1.93	1.84	1.53	36	4000	Pass
Middle	5.10	3.24	1.67	1.47	1.67	1.47			Pass
High	4.47	2.80	2.01	1.59	1.00	1.26			Pass


Test plots

GFSK LOW CHANNEL

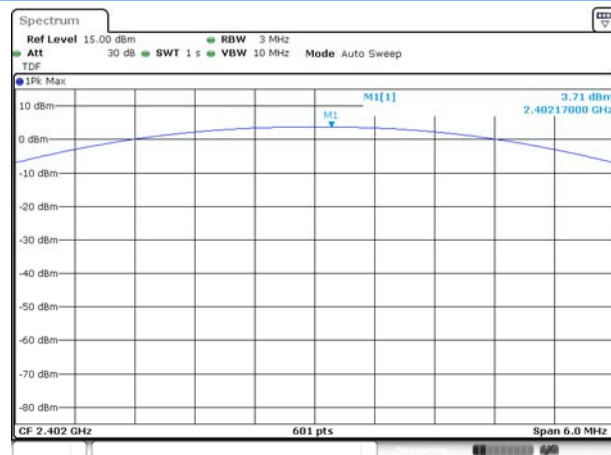


Date: 14.MAR.2018 16:41:44

GFSK MIDDLE CHANNEL

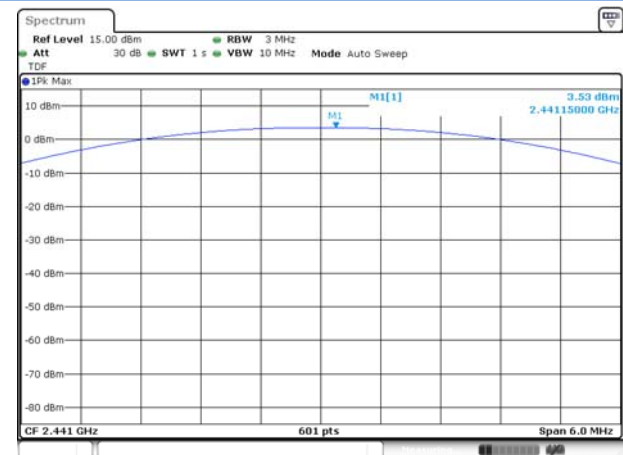


Date: 14.MAR.2018 16:42:18

GFSK HIGH CHANNEL

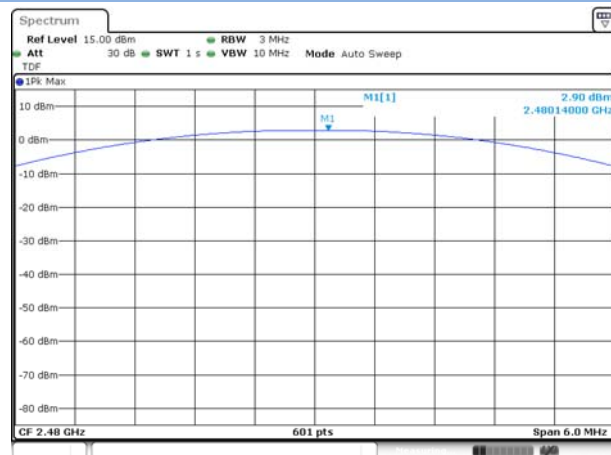


Date: 14.MAR.2018 16:42:45

II/4-DQPSK LOW CHANNEL

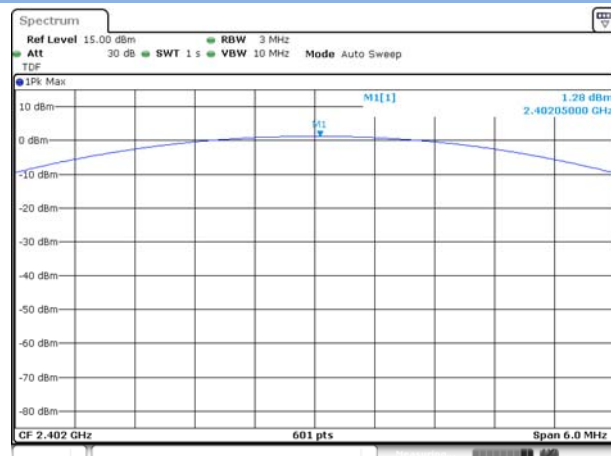


Date: 14.MAR.2018 16:43:30

II/4-DQPSK MIDDLE CHANNEL

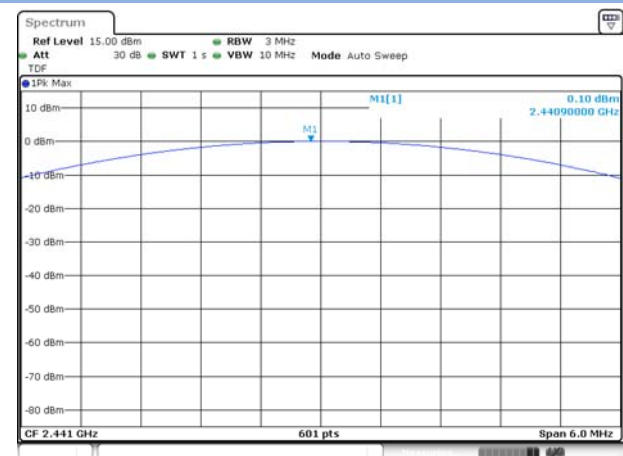


Date: 14.MAR.2018 16:45:40

II/4-DQPSK HIGH CHANNEL

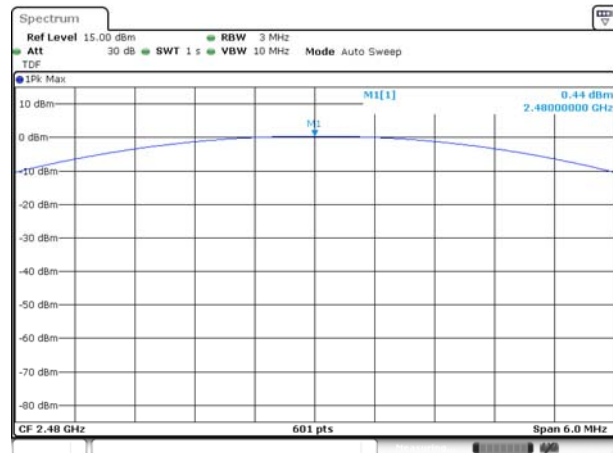


Date: 14.MAR.2018 16:44:29

8-DPSK LOW CHANNEL

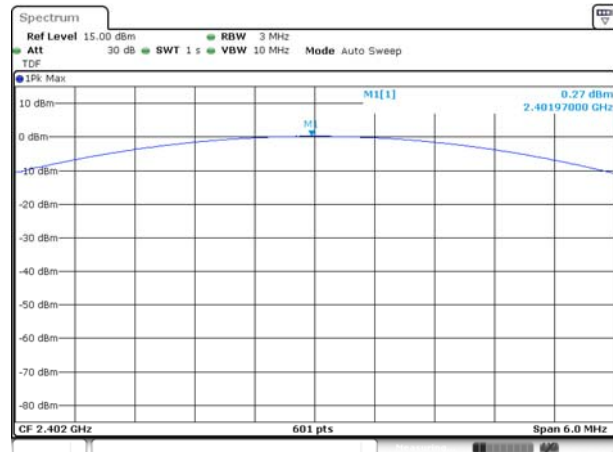


Date: 14.MAR.2018 16:44:53

8-DPSK MIDDLE CHANNEL

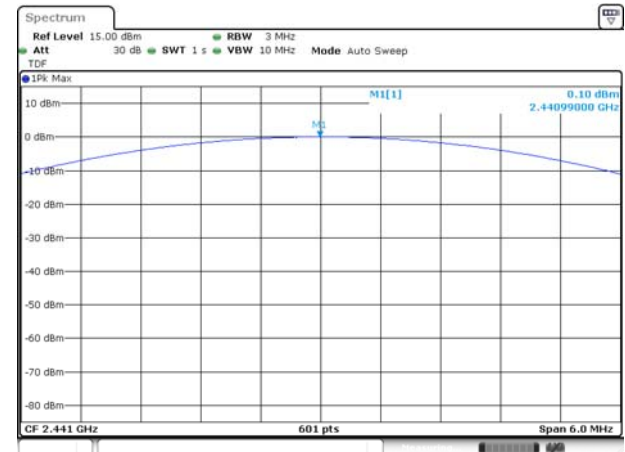

Date: 14.MAR.2018 16:45:18

8-DPSK HIGH CHANNEL

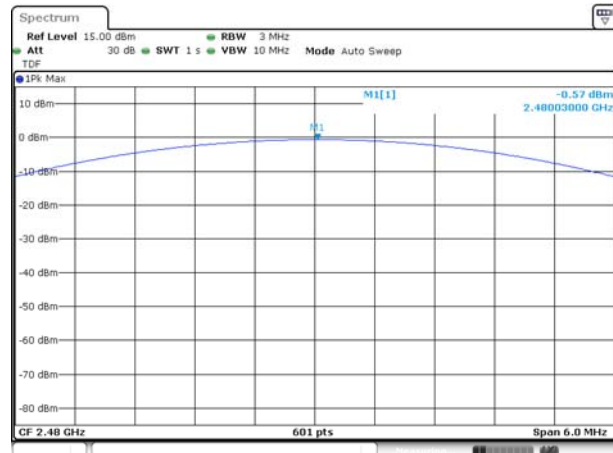

Date: 14.MAR.2018 16:46:38

A.3 20 dB and 99% bandwidth


Test Data

GFSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	1.000000	0.907381
Middle	1.039062	0.907381
High	1.043457	0.907381
8-DPSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	1.304199	1.189580
Middle	1.308594	1.198263
High	1.299805	1.189580


Test plots

20 dB Bandwidth


GFSK LOW CHANNEL

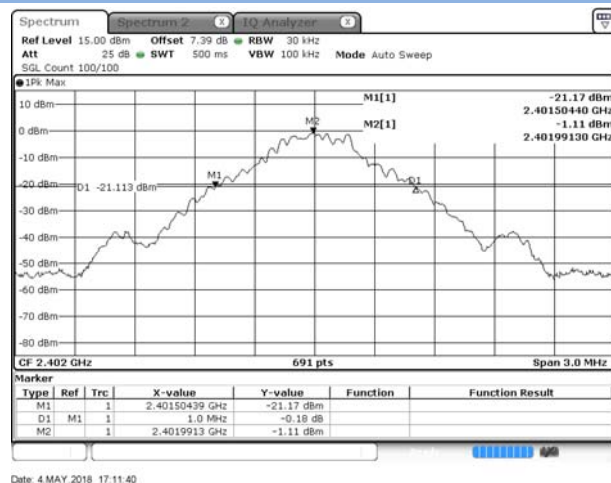


GFSK MIDDLE CHANNEL

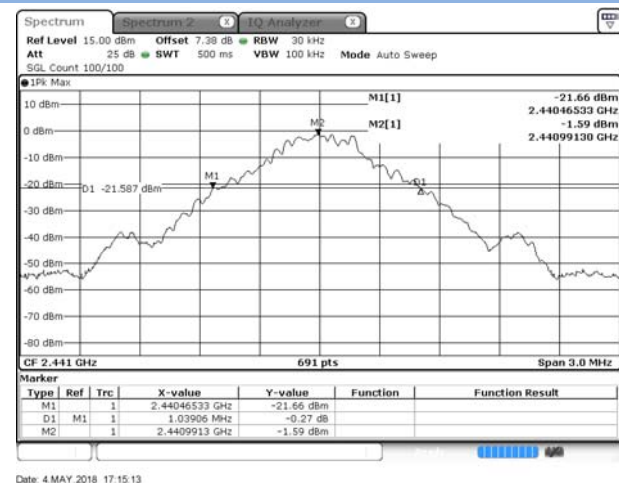


GFSK HIGH CHANNEL

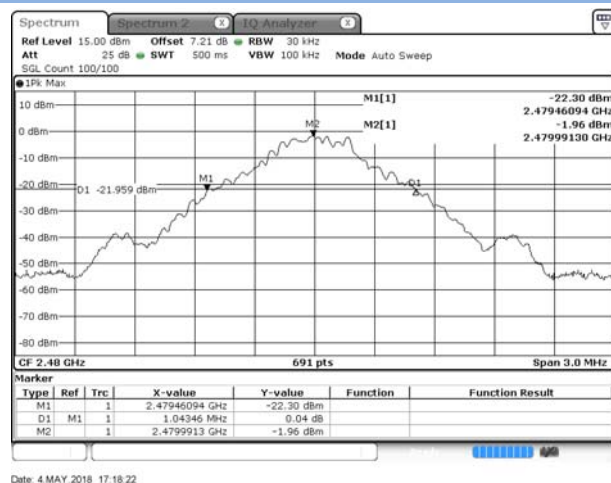


8-DPSK LOW CHANNEL

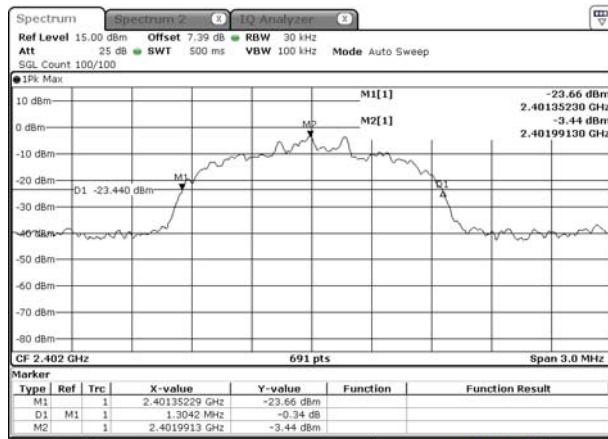

8-DPSK MIDDLE CHANNEL

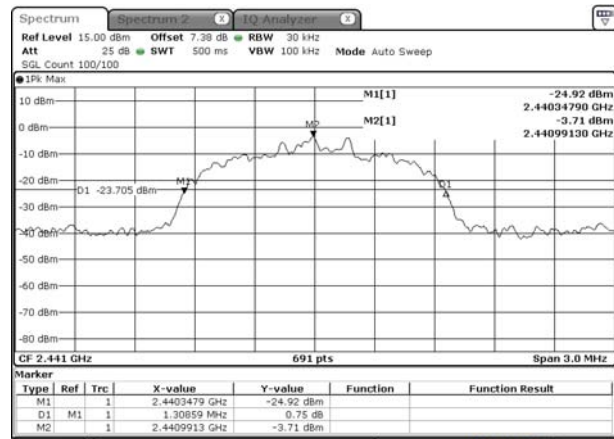


8-DPSK HIGH CHANNEL

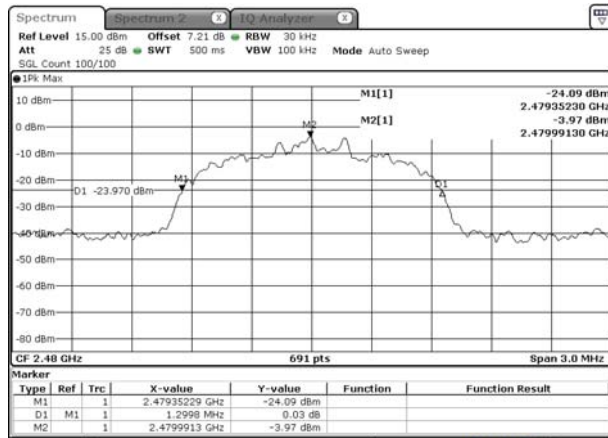


99% Bandwidth


GFSK LOW CHANNEL

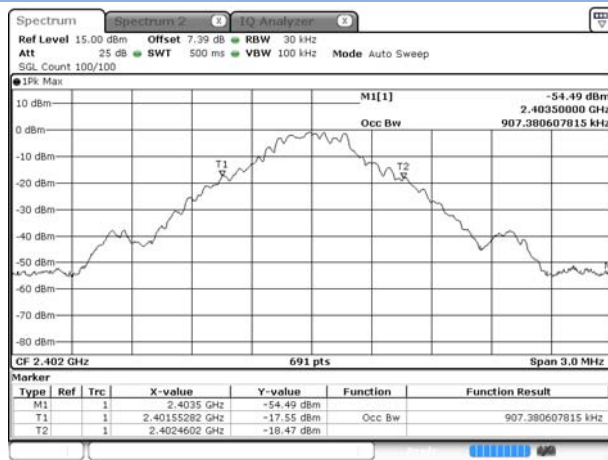


GFSK MIDDLE CHANNEL

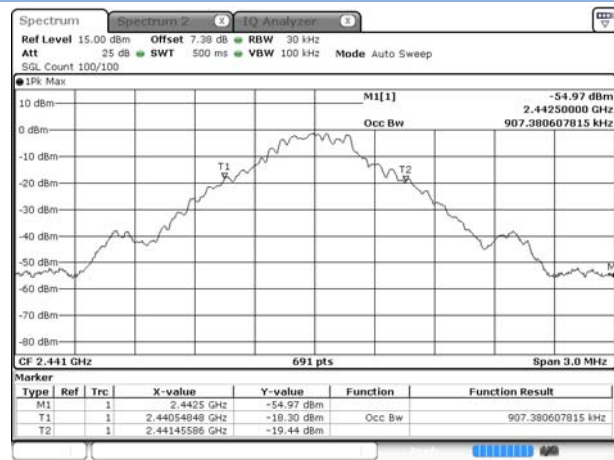


GFSK HIGH CHANNEL

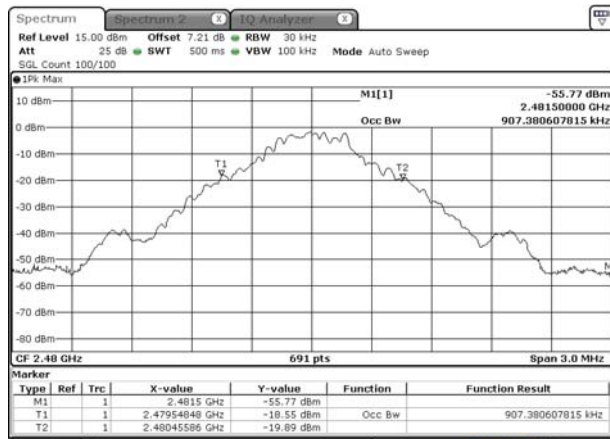


8-DPSK LOW CHANNEL

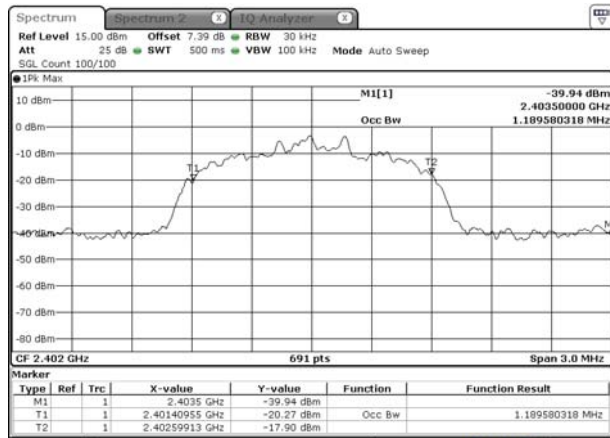

8-DPSK MIDDLE CHANNEL

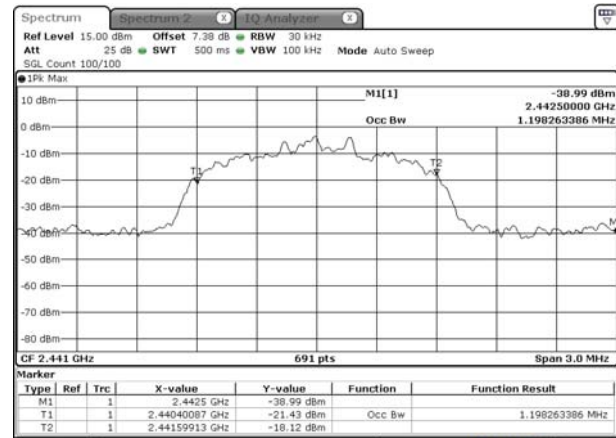

8-DPSK HIGH CHANNEL

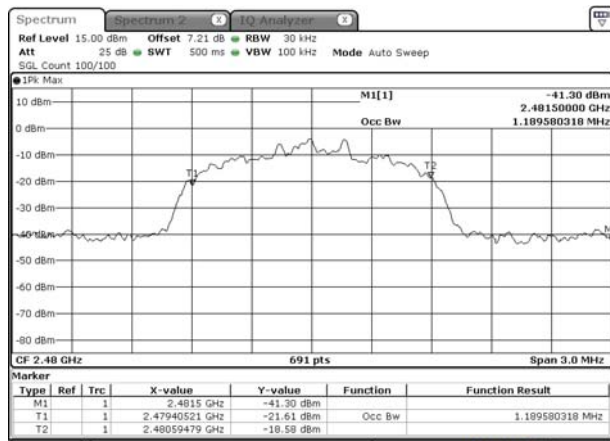

A.4 Hopping Frequency Separation


Test Data

Note: The systems operate with an output power no greater than 125 mw, The data provided in the section A.2.

Mode	Frequency separation (MHz)	Max 20 dB Bandwidth (MHz)	Two-thirds of the 20 dB bandwidth (MHz)	Verdict
GFSK	0.9884	1.043	0.696	Pass
8-DPSK	0.9983	1.309	0.872	Pass


Test Plots

GFSK

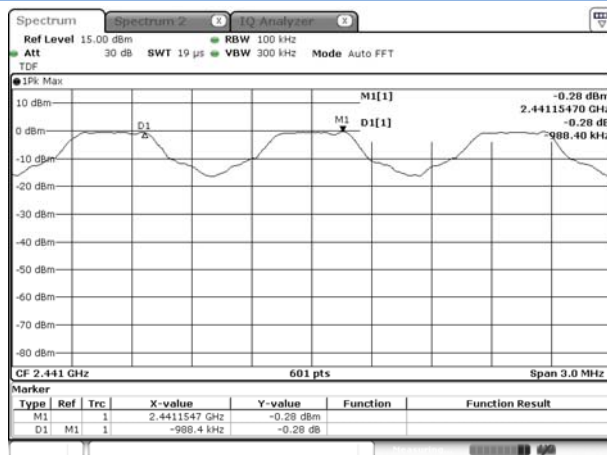

Date: 4 MAY 2018 17:37:41

8-DPSK

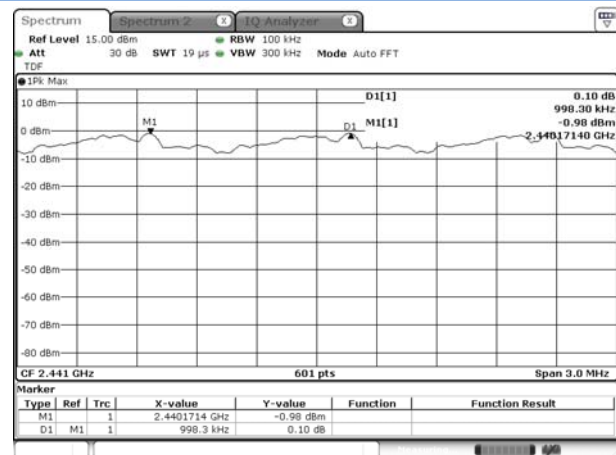

Date: 4 MAY 2018 17:44:39


A.5 Average Time of Occupancy

Test Data

GFSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.36477	116.726	0.4	Pass
DH 3	1.61783	258.853	0.4	Pass
DH 5	2.86870	305.995	0.4	Pass
8-DPSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.37173	118.954	0.4	Pass
DH 3	1.61873	258.997	0.4	Pass
DH 5	2.87380	306.539	0.4	Pass


Test Plots

GFSK DH1

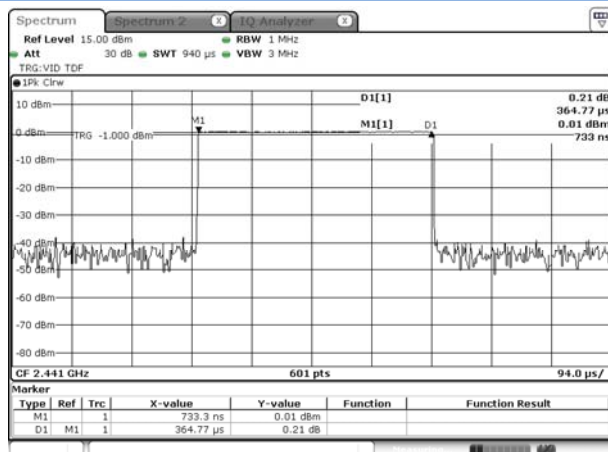


Date: 4 MAY 2018 17:49:12

GFSK DH3

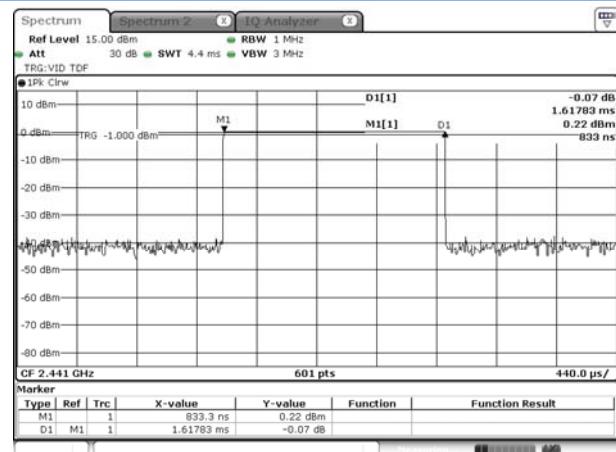


Date: 4 MAY 2018 17:49:45

GFSK DH5

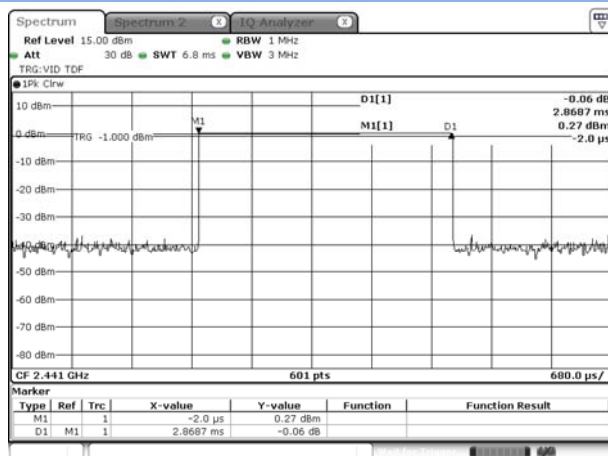


Date: 4 MAY 2018 17:50:16

8-DPSK DH1

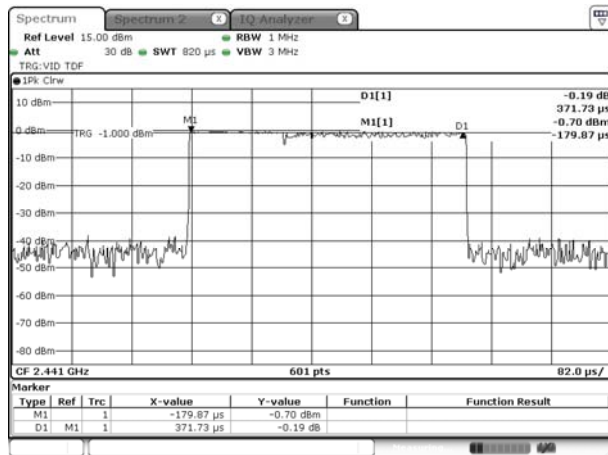


Date: 4 MAY 2018 17:52:56

8-DPSK DH3

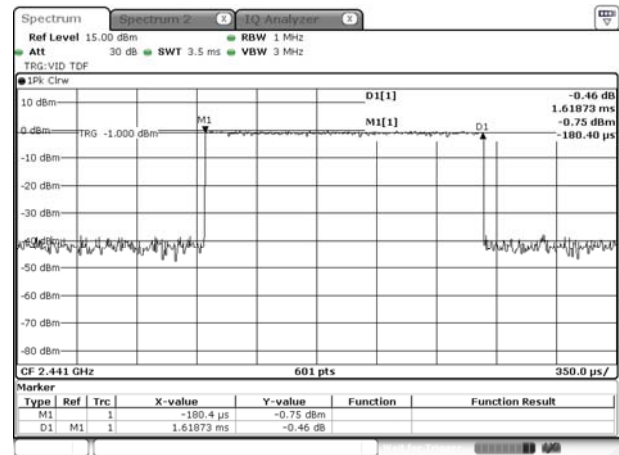

Date: 4 MAY 2018 17:53:22

8-DPSK DH5

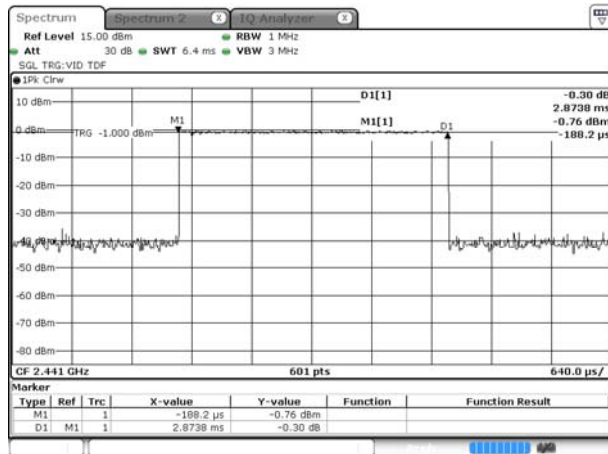

Date: 4 MAY 2018 17:53:50


A.6 Conducted Spurious Emissions & Authorized-band band-edge

Test Data

GFSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-42.16	1.92	-18.08	Pass
Middle	-41.21	1.31	-18.69	Pass
High	-42.07	0.84	-19.16	Pass
8-DPSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-41.99	-0.44	-20.44	Pass
Middle	-41.47	-0.84	-20.84	Pass
High	-41.56	-1.22	-21.22	Pass
Hopping Mode				
Mode	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
GFSK	-41.46	2.79	-17.21	Pass
8-DPSK	-41.55	0.38	-19.62	Pass


Test Plots

GFSK LOW CHANNEL, CARRIER LEVEL

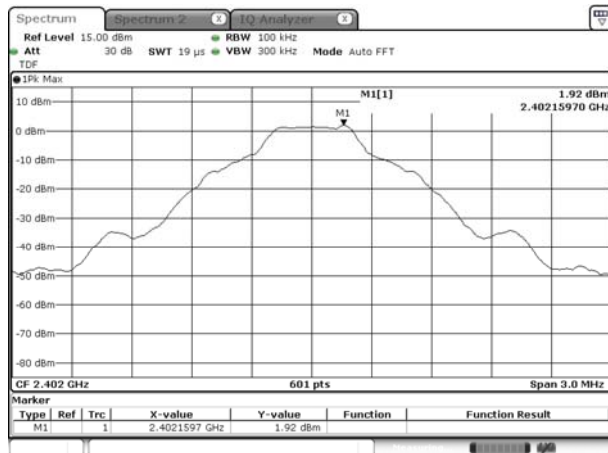


Date: 4.MAY.2018 17:12:46

GFSK LOW CHANNEL, BAND EDGE

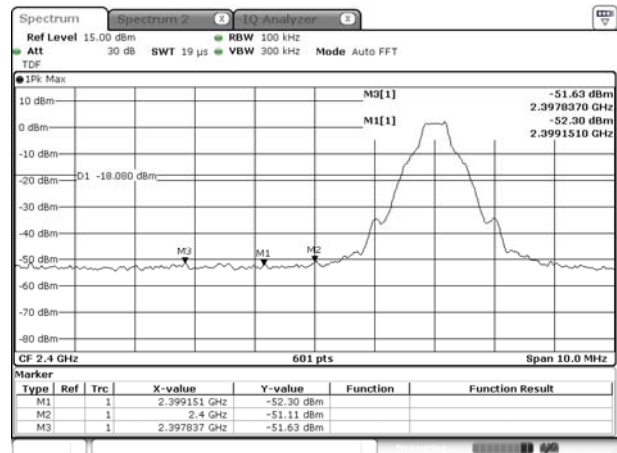


Date: 4.MAY.2018 17:13:55

GFSK LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

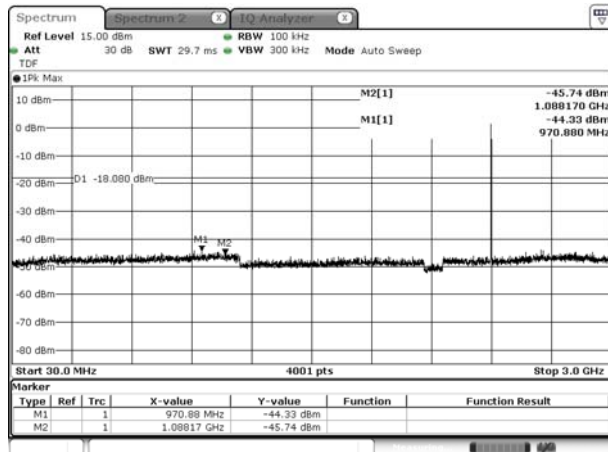


Date: 4.MAY.2018 17:13:15

GFSK LOW CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

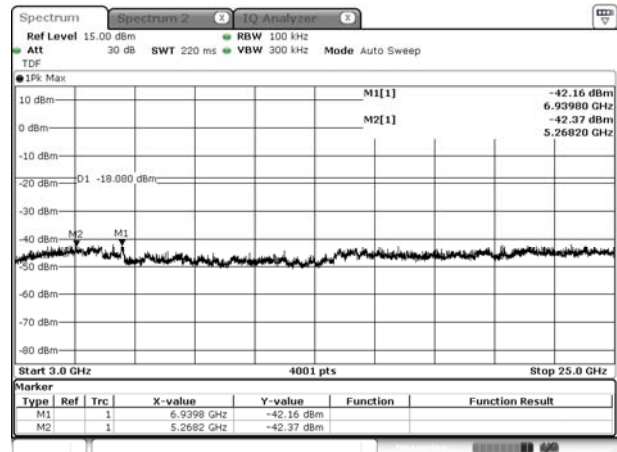


Date: 4.MAY.2018 17:13:27

GFSK MIDDLE CHANNEL, CARRIER LEVEL

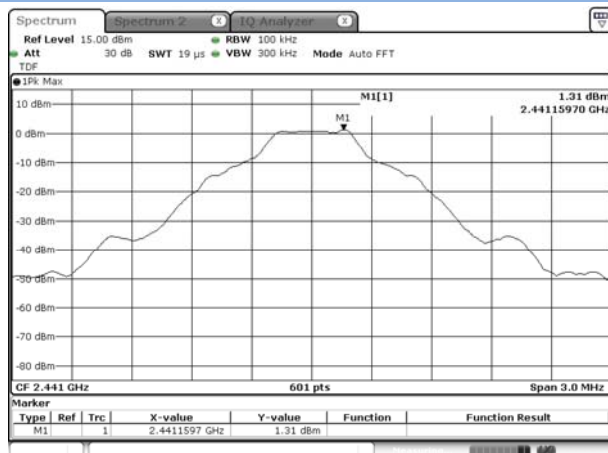


Date: 4.MAY.2018 17:16:20

GFSK MIDDLE CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

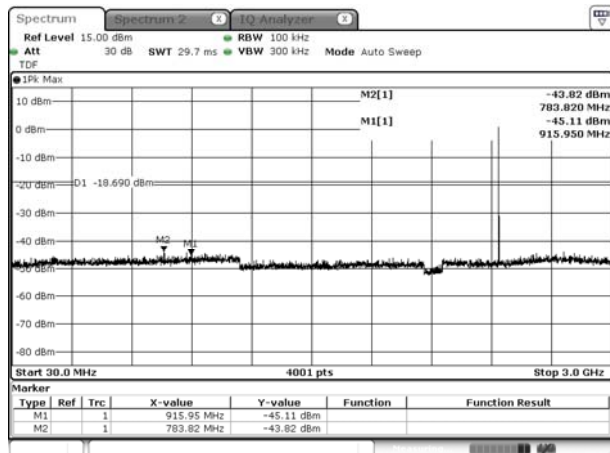


Date: 4 MAY 2018 17:16:51

GFSK MIDDLE CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

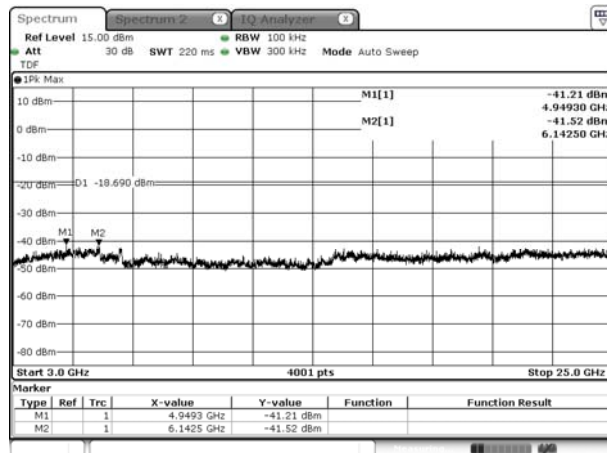


Date: 4 MAY 2018 17:17:00

GFSK HIGH CHANNEL, CARRIER LEVEL

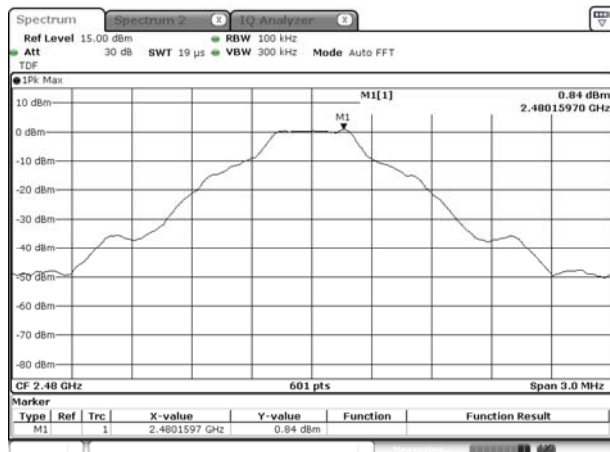


Date: 4 MAY 2018 17:19:46

GFSK HIGH CHANNEL , BAND EDGE

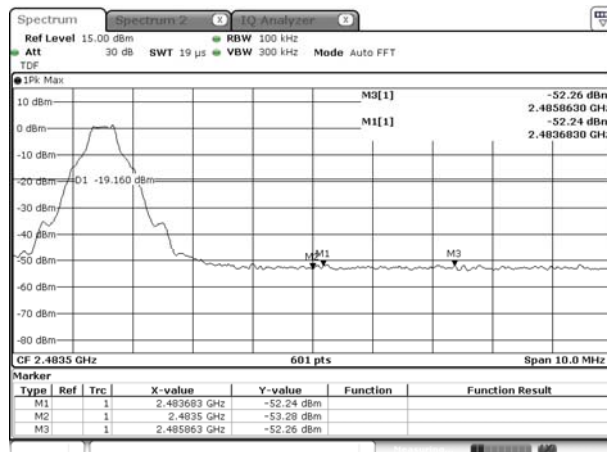


Date: 4 MAY 2018 17:21:55

GFSK HIGH CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

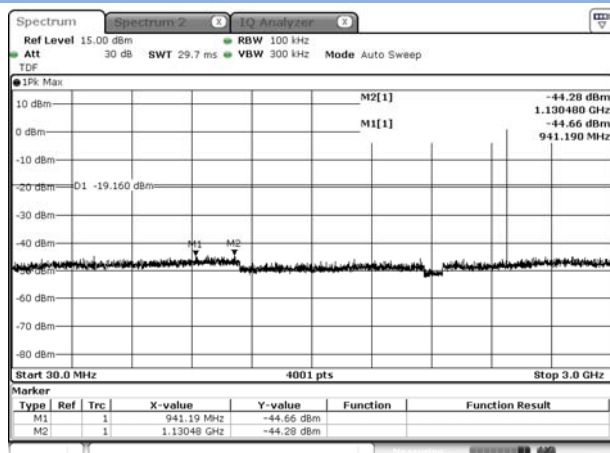


Date: 4 MAY 2018 17:20:49

GFSK HIGH CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

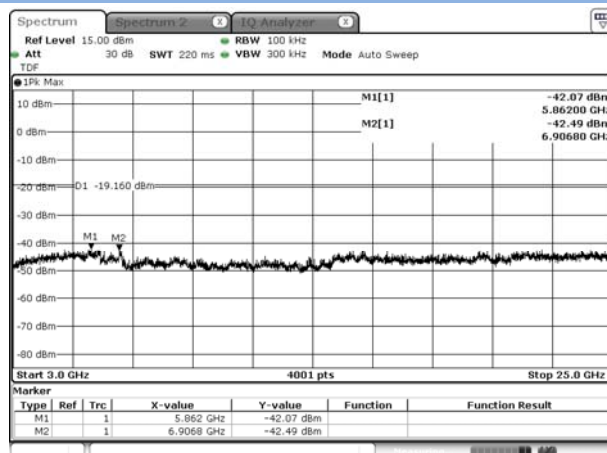


Date: 4 MAY 2018 17:21:00

8-DPSK LOW CHANNEL, CARRIER LEVEL

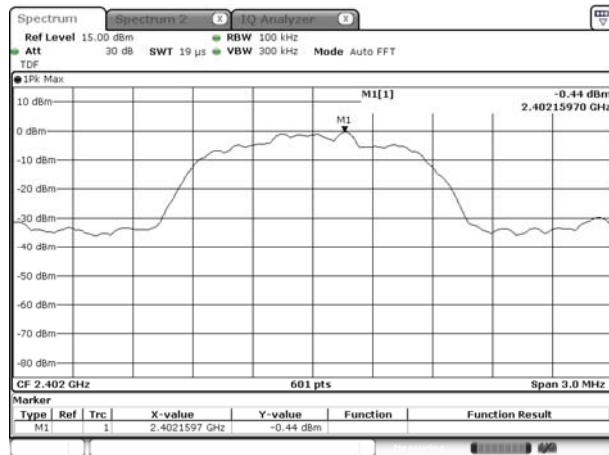


Date: 4.MAY.2018 17:26:39

8-DPSK LOW CHANNEL, BAND EDGE

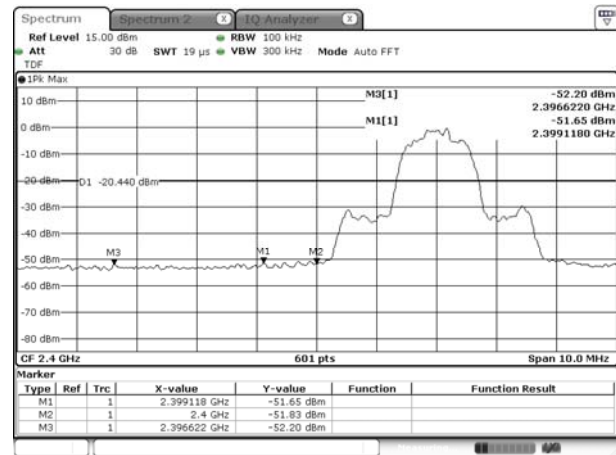


Date: 4.MAY.2018 17:28:17

8-DPSK LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

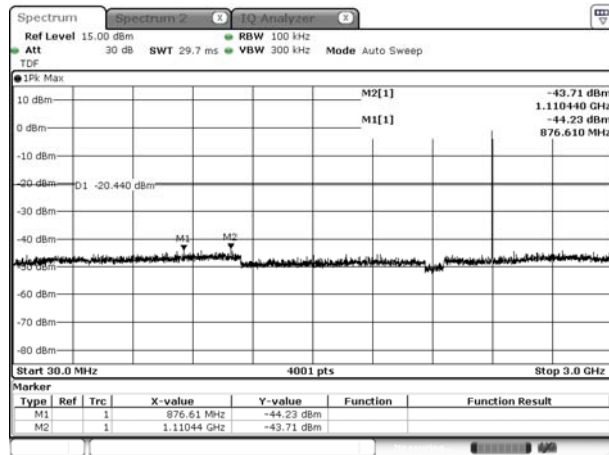


Date: 4.MAY.2018 17:27:28

8-DPSK LOW CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

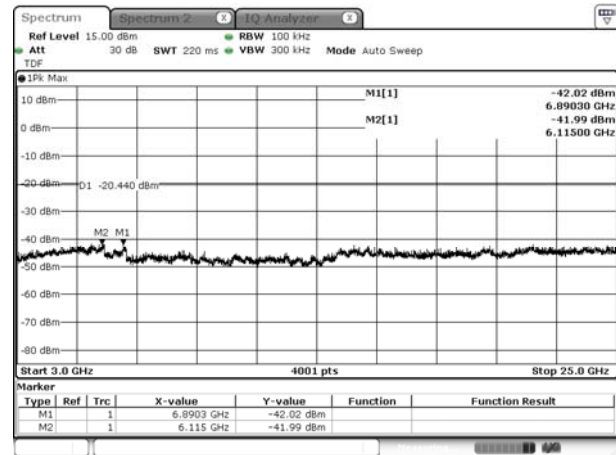


Date: 4.MAY.2018 17:27:48

8-DPSK MIDDLE CHANNEL, CARRIER LEVEL

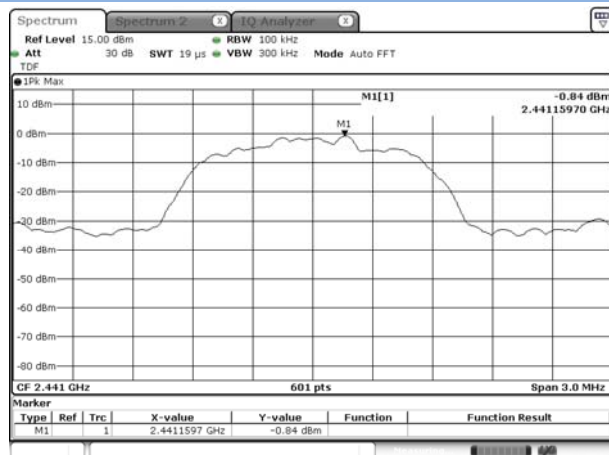


Date: 4.MAY.2018 17:31:03

8-DPSK MIDDLE CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

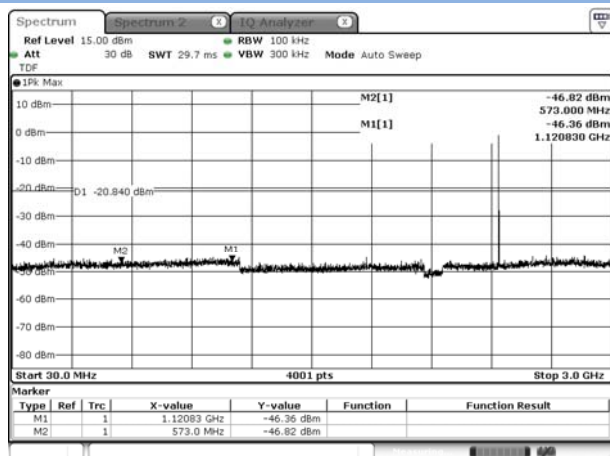


Date: 4 MAY 2018 17:31:34

8-DPSK MIDDLE CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

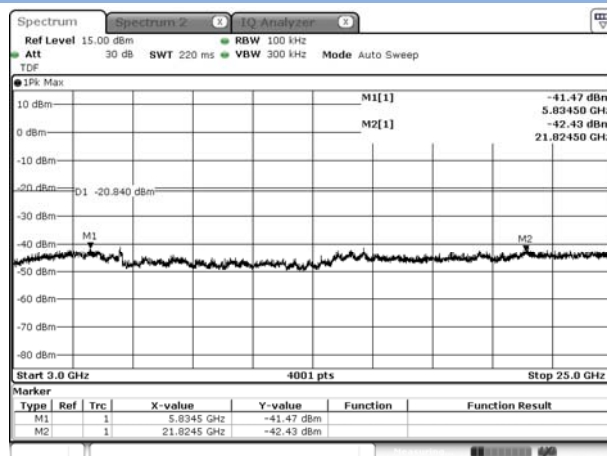


Date: 4 MAY 2018 17:32:05

8-DPSK HIGH CHANNEL , CARRIER LEVEL

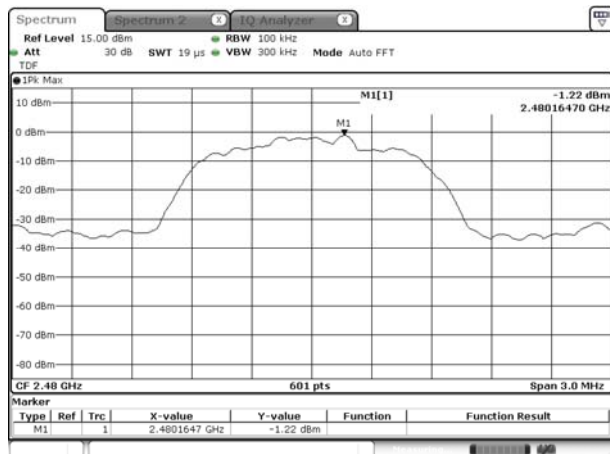


Date: 4 MAY 2018 17:34:39

8-DPSK HIGH CHANNEL , BAND EDGE

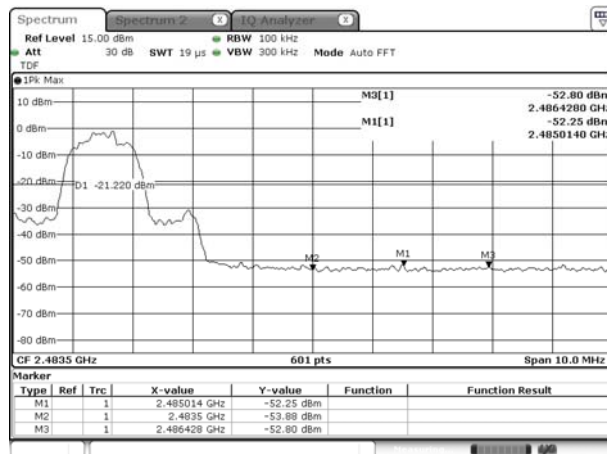


Date: 4 MAY 2018 17:35:50

8-DPSK HIGH CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

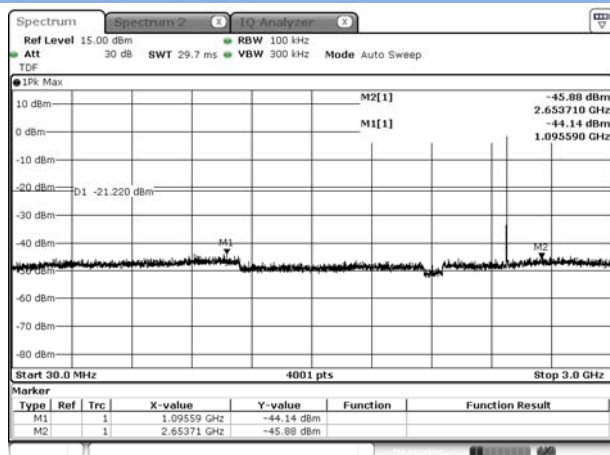


Date: 4 MAY 2018 17:35:02

8-DPSK HIGH CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

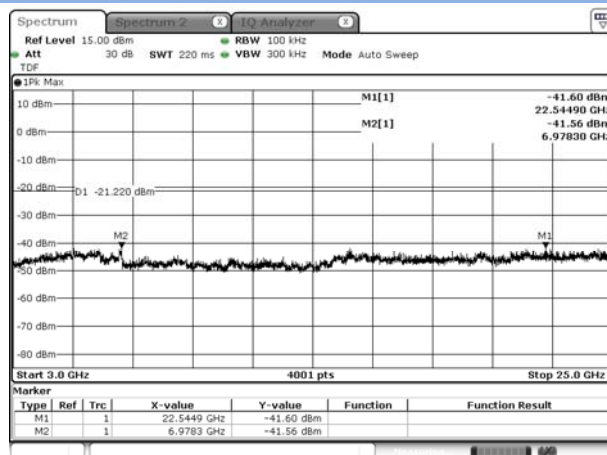


Date: 4 MAY 2018 17:35:29

GFSK HOPPING, CARRIER LEVEL

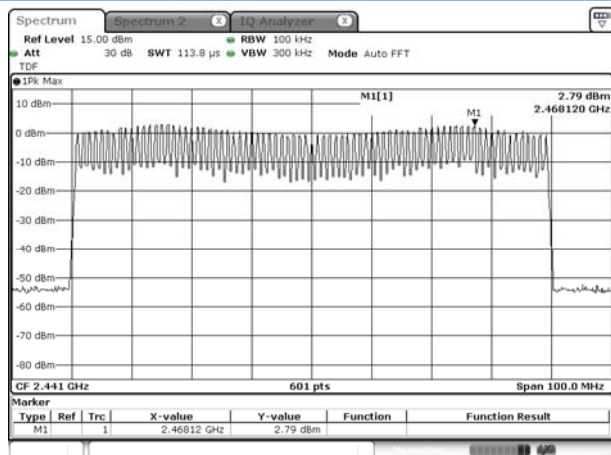


Date: 4 MAY 2018 17:38:06

GFSK HOPPING BAND EDGE (LOW)

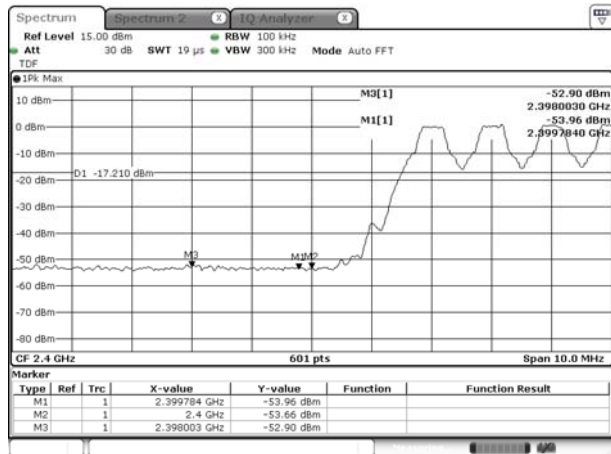


Date: 4 MAY 2018 17:39:59

GFSK HOPPING BAND EDGE (HIGH)

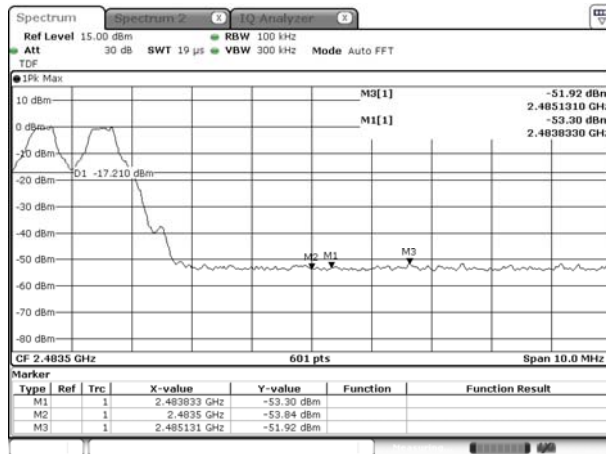


Date: 4 MAY 2018 17:40:18

GFSK Hopping Mode, SPURIOUS 30 MHz ~ 3 GHz

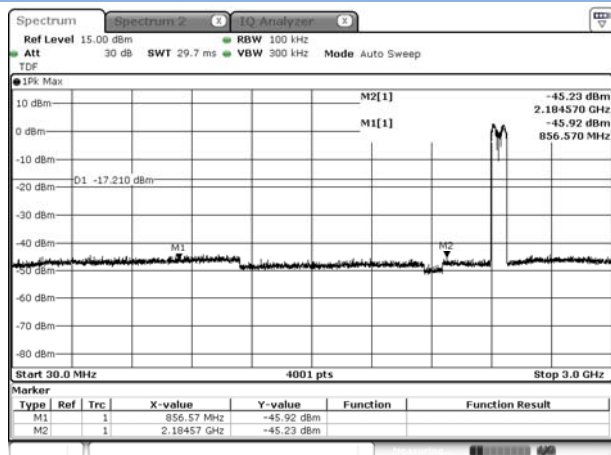


Date: 4 MAY 2018 17:39:20

GFSK Hopping Mode, SPURIOUS 30 3GHz ~ 25 GHz

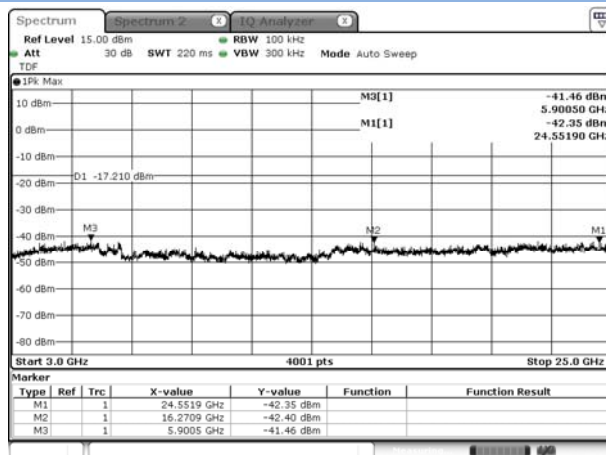

Date: 4 MAY 2018 17:39:34

8-DPSK HOPPING, CARRIER LEVEL

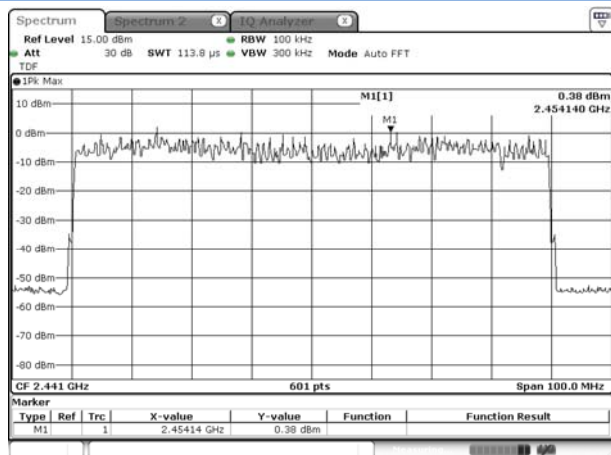


Date: 4 MAY 2018 17:44:59

8-DPSK Hopping BAND EDGE (LOW)




Date: 4 MAY 2018 17:46:51

8-DPSK Hopping BAND EDGE (HIGH)

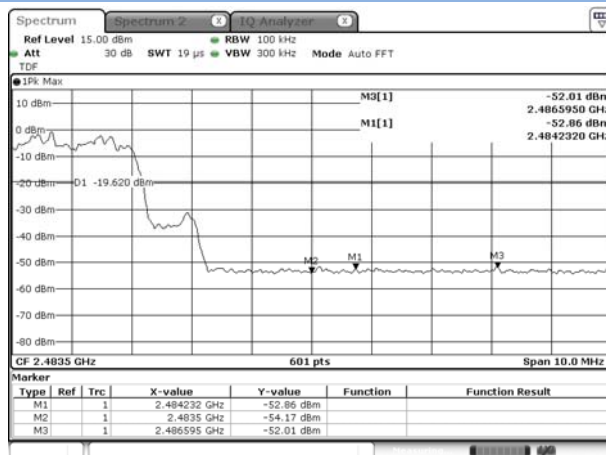


Date: 4 MAY 2018 17:47:12

8-DPSK Hopping Mode, SPURIOUS 30 MHz ~ 3 GHz

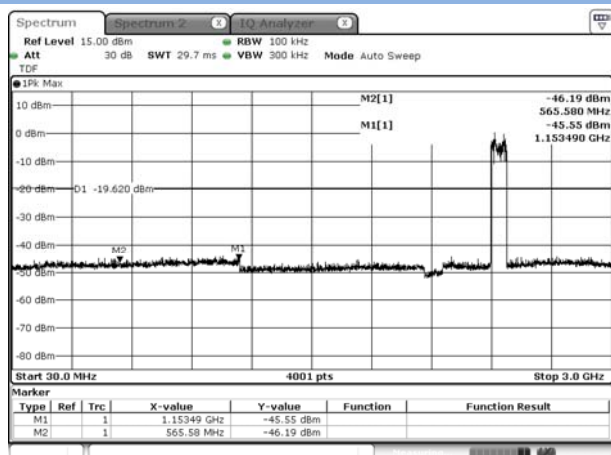

Date: 4 MAY 2018 17:45:46

8-DPSK Hopping Mode, SPURIOUS 30 GHz ~ 25 GHz

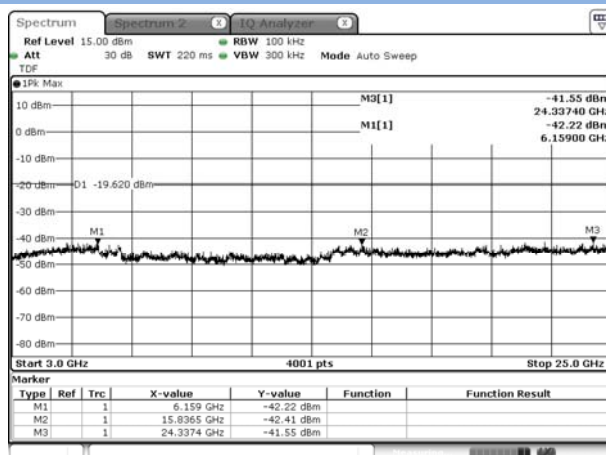

Date: 4 MAY 2018 17:46:00


A.7 Conducted Emissions

Note 1: The EUT is working in the Normal link mode.

Note 2: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.


Test Data and Plots

PHASE L

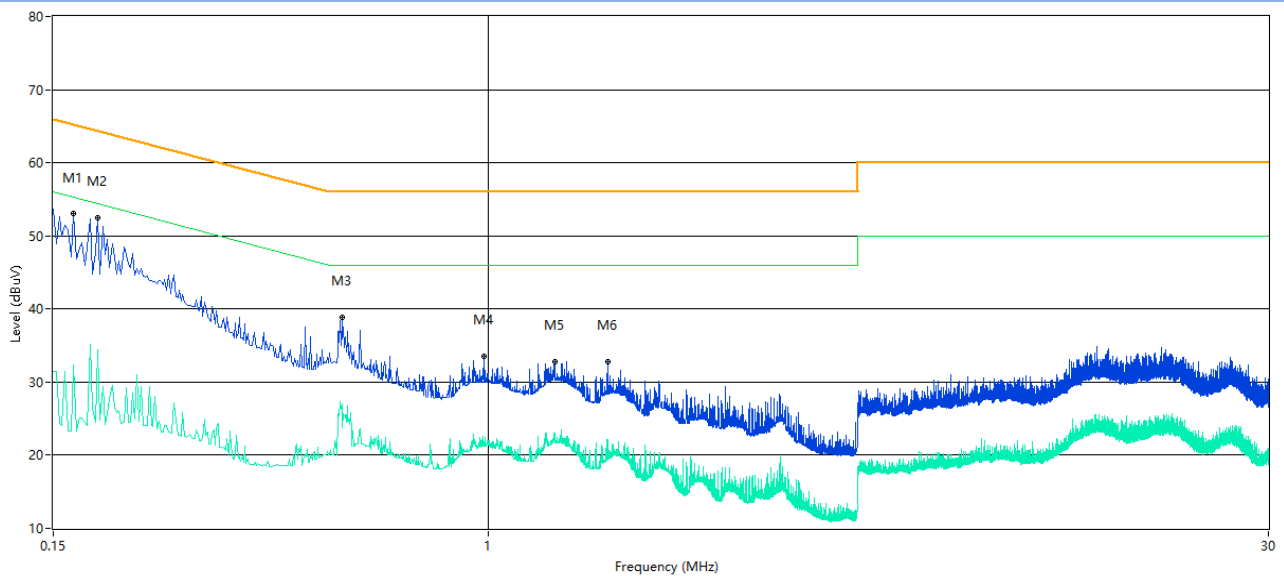

Frequency (MHz)	Peak Level (dBuV)	Q-peak Level (dBuV)	Average Level (dBuV)	Factor (dB)	QP Limit (dBuV)	AV Limit (dBuV)	Margin (dB)	Line	Verdict
0.164	55.42	47.15	30.46	10.01	65.3	55.3	18.15	L Line	Pass
0.182	53.47	45.55	29.53	10.01	64.4	54.4	18.85	L Line	Pass
0.528	40.33	33.26	26.40	10.02	56.0	46.0	19.60	L Line	Pass
0.980	34.46	27.30	21.73	10.03	56.0	46.0	24.27	L Line	Pass
1.338	35.67	27.05	22.05	10.04	56.0	46.0	23.95	L Line	Pass
1.682	32.32	24.65	20.12	10.06	56.0	46.0	25.88	L Line	Pass

PHASE N

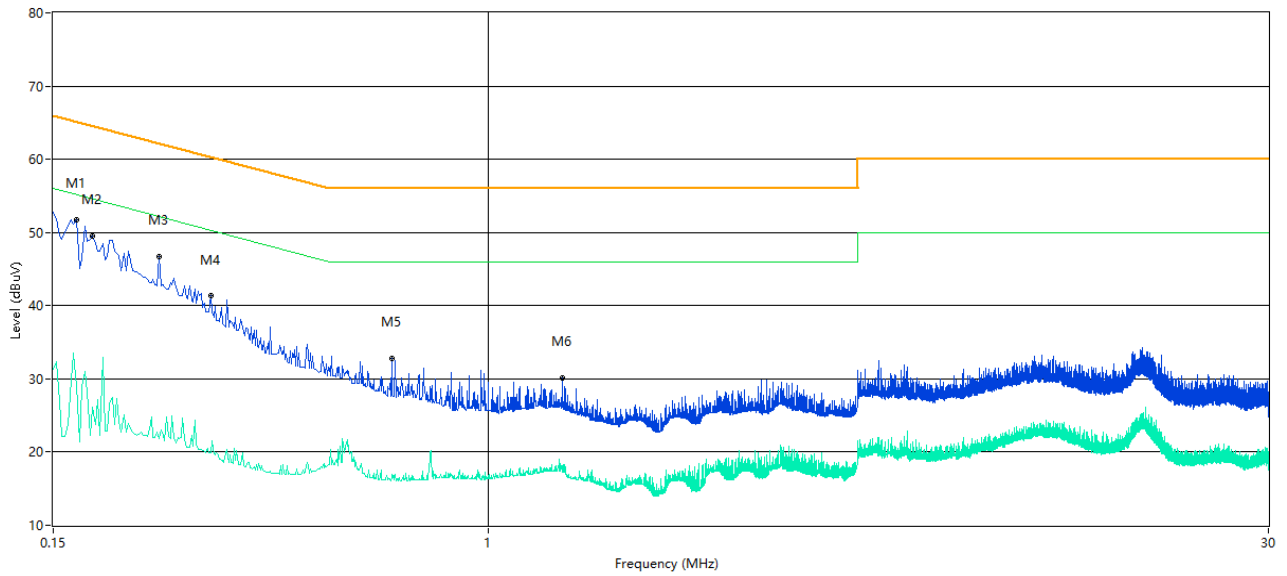

Frequency (MHz)	Peak Level (dBuV)	Q-peak Level (dBuV)	Average Level (dBuV)	Factor (dB)	QP Limit (dBuV)	AV Limit (dBuV)	Margin (dB)	Line	Verdict
0.166	55.01	45.93	30.17	10.01	65.2	55.2	19.27	N Line	Pass
0.178	54.31	44.76	28.76	10.01	64.6	54.6	19.84	N Line	Pass
0.238	47.94	38.75	23.49	10.01	62.2	52.2	23.45	N Line	Pass
0.298	42.97	33.11	20.55	10.01	60.3	50.3	27.19	N Line	Pass
0.656	33.51	22.66	16.72	10.02	56.0	46.0	29.28	N Line	Pass
1.382	30.25	21.26	16.58	10.05	56.0	46.0	29.42	N Line	Pass

A.8 Radiated Spurious Emission

Test Data and Plots


Note¹: The symbol of “--” in the table which means not application.

Note²: For the test data above 1 GHz, according the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note³: The EUT is working in the Normal link mode below 1 GHz.


The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

30 MHz to 1 GHz, ANT V

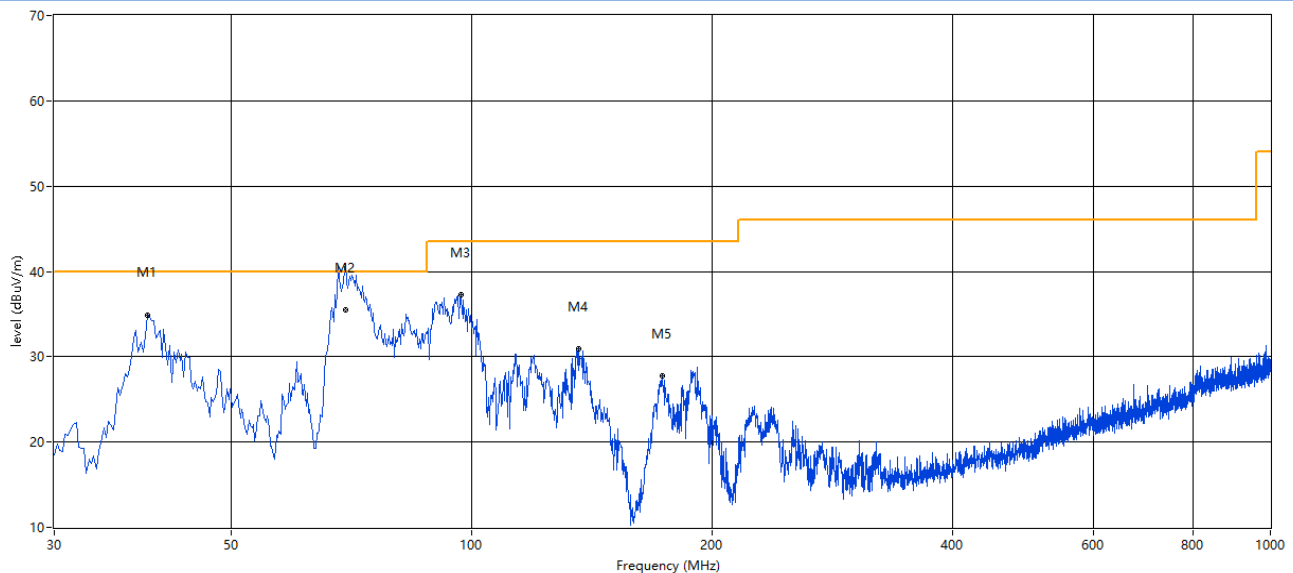

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
39.213	34.91	--	--	-27.31	--	40.0	--	5.09	158.60	100	Vertical	Pass
69.331	41.53	35.46	--	-30.72	--	40.0	--	4.54	307.50	100	Vertical	Pass
96.913	37.33	--	--	-29.05	--	43.5	--	6.17	255.50	100	Vertical	Pass
135.946	30.95	--	--	-31.62	--	43.5	--	12.55	155.60	100	Vertical	Pass
173.039	27.70	--	--	-30.54	--	43.5	--	15.80	129.70	100	Vertical	Pass

30 MHz to 1 GHz, ANT H

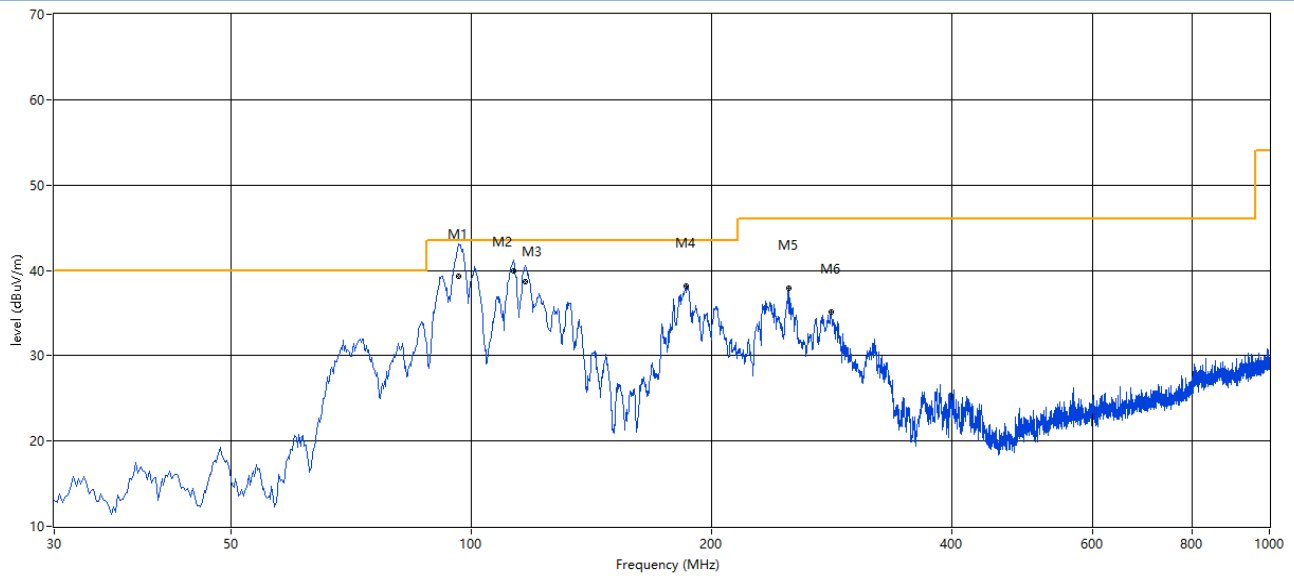


Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
96.540	43.14	39.32	--	-29.12	--	43.5	--	4.18	117.90	236	Horizontal	Pass
113.100	43.55	39.88	--	-28.86	--	43.5	--	3.62	302.30	297	Horizontal	Pass
116.944	42.24	38.64	--	-29.61	--	43.5	--	4.86	308.20	296	Horizontal	Pass
185.889	38.17	--	--	-29.51	--	43.5	--	5.33	0.00	200	Horizontal	Pass
249.650	37.92	--	--	-26.91	--	46.0	--	8.08	158.50	100	Horizontal	Pass
282.379	35.17	--	--	-26.63	--	46.0	--	10.83	322.20	100	Horizontal	Pass

Test Data and Plots (1 GHz ~ 10th Harmonic)

Note: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

GFSK LOW CHANNEL 1 GHz to 7 GHz, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

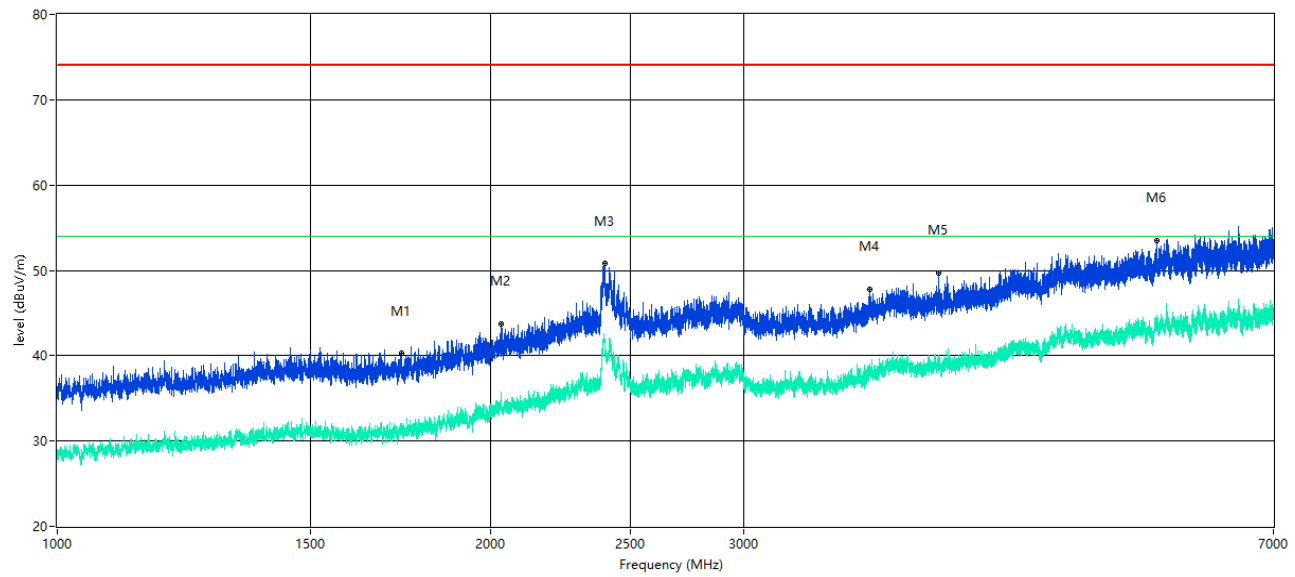

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1734.408	40.27	--	31.9	-11.11	74.0	--	54.0	22.10	53.60	100	Vertical	Pass
2033.371	43.75	--	35.5	-7.75	74.0	--	54.0	18.50	0.00	100	Vertical	Pass
2400.325	50.81	--	41.7	-0.09	74.0	--	54.0	12.30	105.90	100	Vertical	Pass
3671.166	47.73	--	37.7	-3.17	74.0	--	54.0	16.30	105.90	100	Vertical	Pass
4100.487	49.72	--	40.0	-2.59	74.0	--	54.0	14.00	22.90	100	Vertical	Pass
5805.024	53.46	--	43.8	2.42	74.0	--	54.0	10.20	191.90	100	Vertical	Pass

GFSK LOW CHANNEL 1 GHz to 7 GHz, ANT H


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

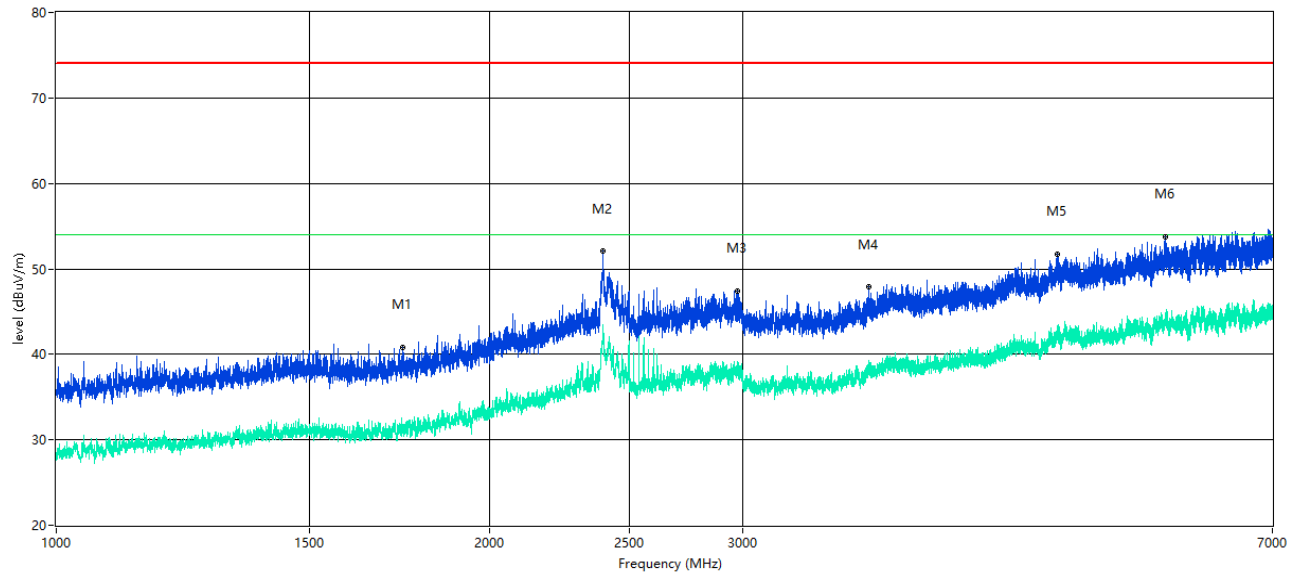

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1740.407	40.82	--	31.3	-11.42	74.0	--	54.0	22.70	176.20	100	Horizontal	Pass
2398.325	52.05	--	43.5	-0.04	74.0	--	54.0	10.50	353.10	100	Horizontal	Pass
2971.504	47.36	--	38.0	-3.15	74.0	--	54.0	16.00	315.30	100	Horizontal	Pass
3668.916	47.85	--	39.3	-3.18	74.0	--	54.0	14.70	171.80	100	Horizontal	Pass
4964.004	51.66	--	42.6	1.38	74.0	--	54.0	11.40	110.00	100	Horizontal	Pass
5901.387	53.72	--	44.7	3.43	74.0	--	54.0	9.30	121.10	100	Horizontal	Pass

GFSK MIDDLE CHANNEL 1 GHz to 7 GHz, ANT V


R/Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz:

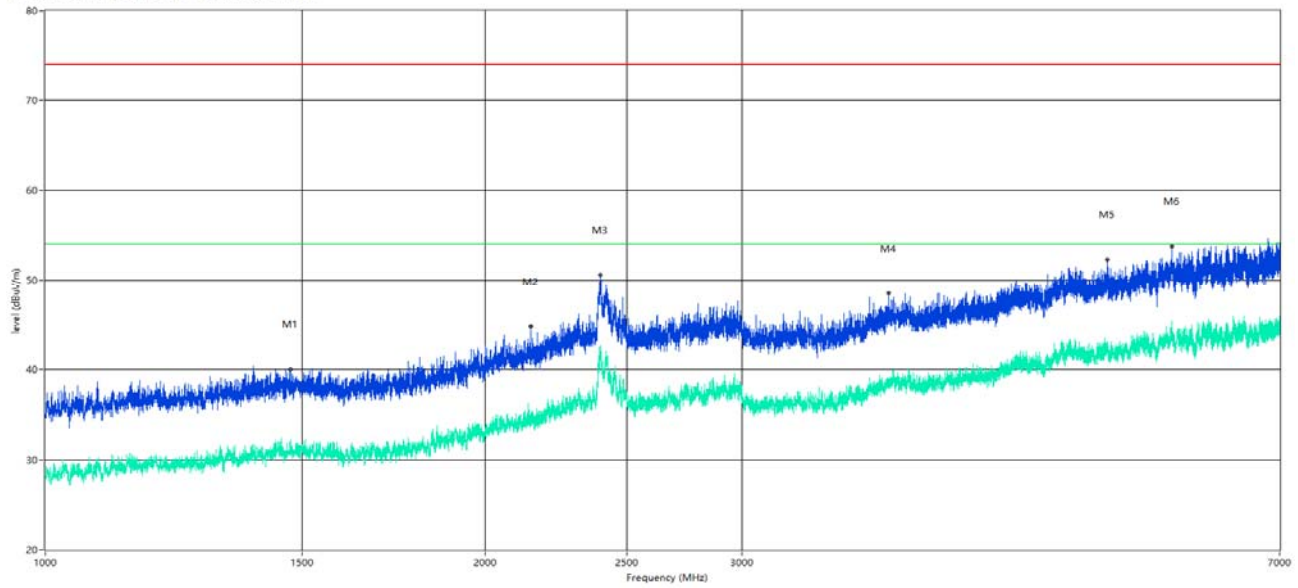

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1472.441	39.99	--	31.7	-11.33	74.0	--	54.0	22.30	102.00	100	Vertical	Pass
2150.606	44.75	--	34.6	-7.40	74.0	--	54.0	19.40	61.00	100	Vertical	Pass
2399.325	50.56	--	41.7	-0.07	74.0	--	54.0	12.30	72.00	100	Vertical	Pass
3780.652	48.51	--	38.8	-2.78	74.0	--	54.0	15.20	12.00	100	Vertical	Pass
5338.208	52.31	--	42.7	1.39	74.0	--	54.0	11.30	58.00	100	Vertical	Pass
5903.637	53.75	--	45.4	3.70	74.0	--	54.0	8.60	138.00	100	Vertical	Pass

GFSK MIDDLE CHANNEL 1 GHz to 7 GHz, ANT H


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

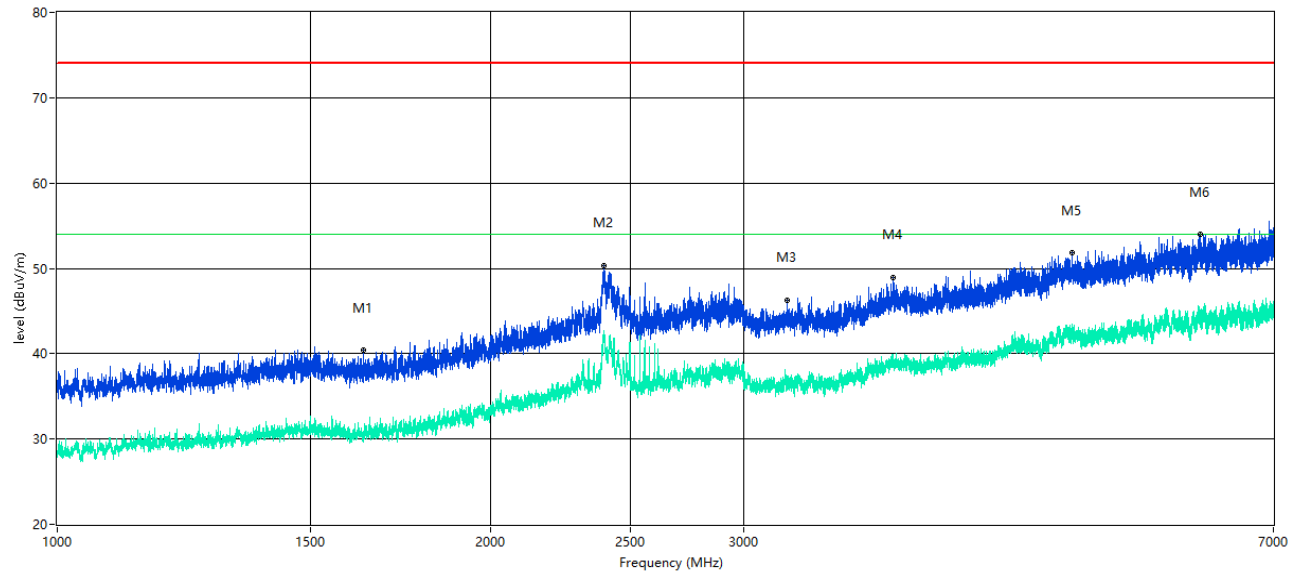

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1630.921	40.41	--	30.9	-12.18	74.0	--	54.0	23.10	0.30	100	Horizontal	Pass
2399.325	50.37	--	42.8	-0.07	74.0	--	54.0	11.20	89.60	100	Horizontal	Pass
3215.223	46.30	--	36.7	-5.23	74.0	--	54.0	17.30	129.20	100	Horizontal	Pass
3806.899	48.94	--	39.9	-2.46	74.0	--	54.0	14.10	57.50	100	Horizontal	Pass
5074.991	51.87	--	42.9	1.95	74.0	--	54.0	11.10	205.00	100	Horizontal	Pass
6223.347	54.02	--	44.7	4.73	74.0	--	54.0	9.30	217.60	100	Horizontal	Pass

GFSK HIGH CHANNEL 1 GHz to 7 GHz, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

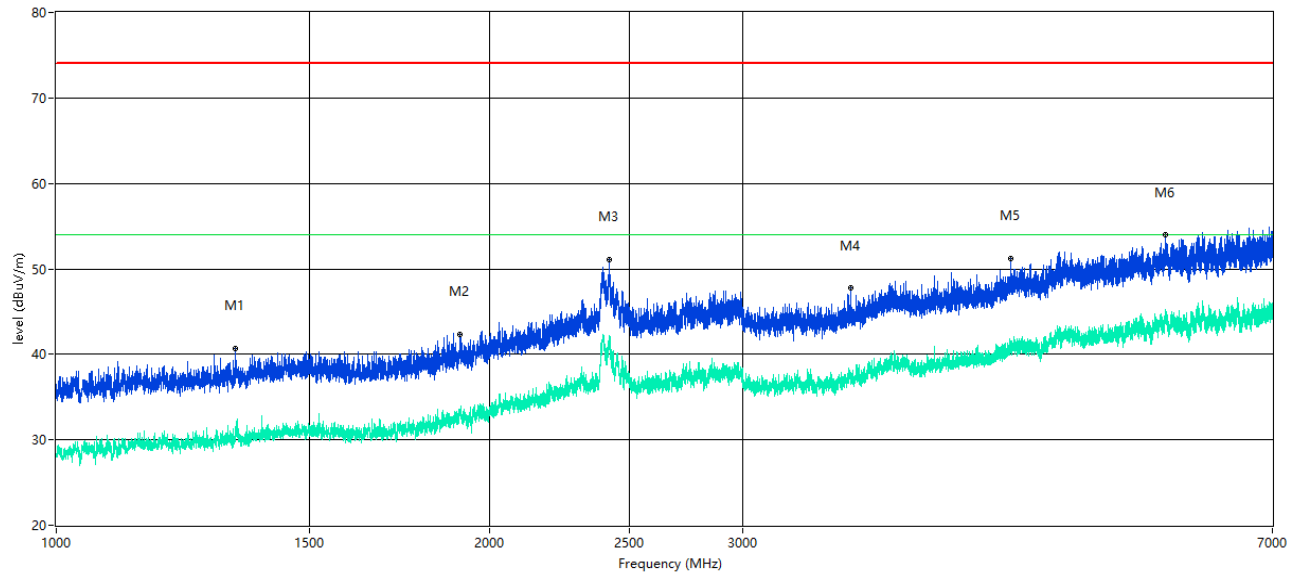

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1331.209	40.69	--	31.6	-12.02	74.0	--	54.0	22.40	208.10	100	Vertical	Pass
1906.637	42.31	--	33.3	-9.12	74.0	--	54.0	20.70	313.60	100	Vertical	Pass
2421.822	51.11	--	42.2	-0.82	74.0	--	54.0	11.80	241.70	100	Vertical	Pass
3564.304	47.78	--	37.7	-4.51	74.0	--	54.0	16.30	217.20	100	Vertical	Pass
4609.299	51.15	--	40.6	0.42	74.0	--	54.0	13.40	1.00	100	Vertical	Pass
5902.887	53.97	--	44.6	3.61	74.0	--	54.0	9.40	263.20	100	Vertical	Pass

GFSK HIGH CHANNEL 1 GHz to 7 GHz, ANT H


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

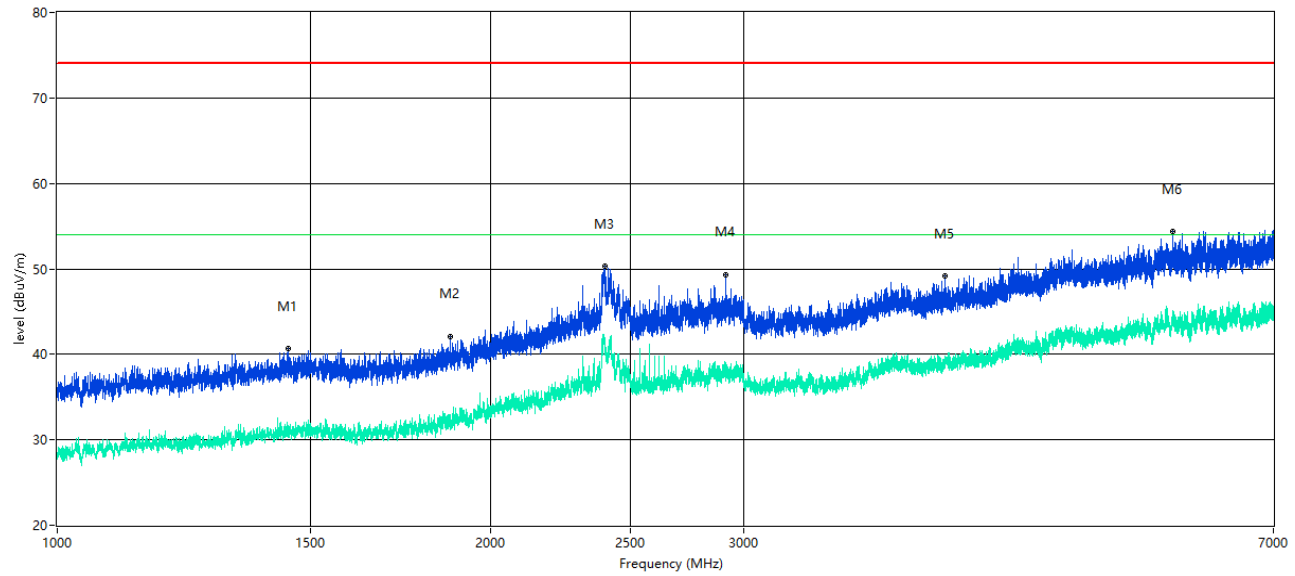

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1446.194	40.63	--	31.6	-11.59	74.0	--	54.0	22.40	52.30	100	Horizontal	Pass
1876.140	42.13	--	32.4	-10.55	74.0	--	54.0	21.60	6.60	100	Horizontal	Pass
2400.075	50.30	--	41.7	-0.08	74.0	--	54.0	12.30	8.80	100	Horizontal	Pass
2914.761	49.35	--	38.6	-3.44	74.0	--	54.0	15.40	56.80	100	Horizontal	Pass
4139.483	49.15	--	39.2	-2.23	74.0	--	54.0	14.80	94.50	100	Horizontal	Pass
5961.005	54.32	--	44.3	3.91	74.0	--	54.0	9.70	154.60	100	Horizontal	Pass

8-DPSK LOW CHANNEL 1 GHz to 7 GHz, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

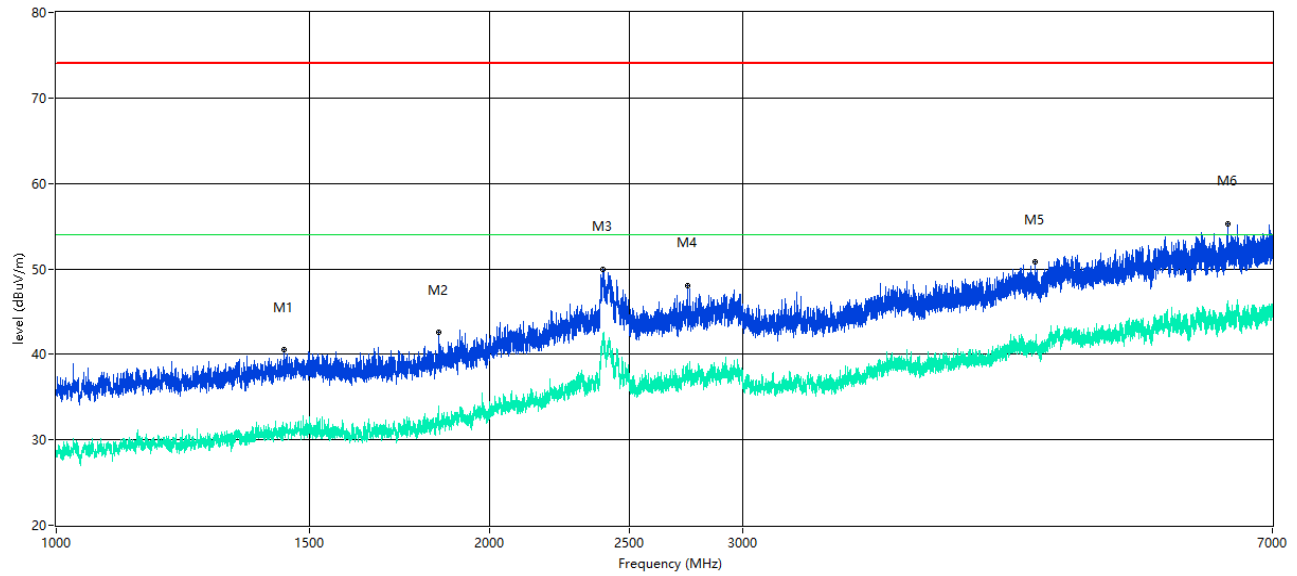

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1438.695	40.61	--	31.6	-11.76	74.0	--	54.0	22.40	282.70	100	Vertical	Pass
1843.145	42.56	--	33.9	-9.81	74.0	--	54.0	20.10	101.60	100	Vertical	Pass
2397.075	49.98	--	42.0	0.01	74.0	--	54.0	12.00	135.20	100	Vertical	Pass
2744.032	48.05	--	38.9	-3.70	74.0	--	54.0	15.10	96.90	100	Vertical	Pass
4787.027	50.87	--	41.0	-0.38	74.0	--	54.0	13.00	59.60	100	Vertical	Pass
6514.311	55.29	--	45.6	5.60	74.0	--	54.0	8.40	106.30	100	Vertical	Pass

8-DPSK LOW CHANNEL 1 GHz to 7 GHz, ANT H


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

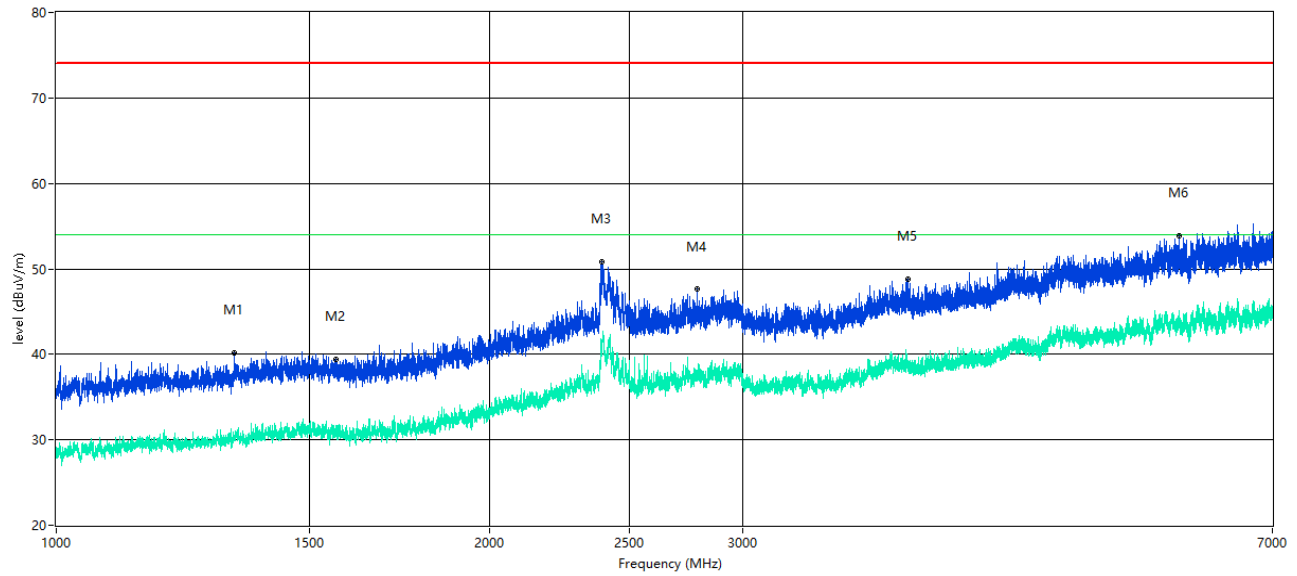

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1328.959	40.21	--	30.0	-12.32	74.0	--	54.0	24.00	35.60	100	Horizontal	Pass
1564.429	39.45	--	31.0	-11.72	74.0	--	54.0	23.00	340.00	100	Horizontal	Pass
2392.076	50.86	--	40.9	-0.10	74.0	--	54.0	13.10	360.00	100	Horizontal	Pass
2790.026	47.60	--	37.5	-3.58	74.0	--	54.0	16.50	327.20	100	Horizontal	Pass
3906.637	48.76	--	38.9	-2.84	74.0	--	54.0	15.10	136.40	100	Horizontal	Pass
6030.746	53.86	--	43.6	3.98	74.0	--	54.0	10.40	360.00	100	Horizontal	Pass

8-DPSK MIDDLE CHANNEL 1 GHz to 7 GHz, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

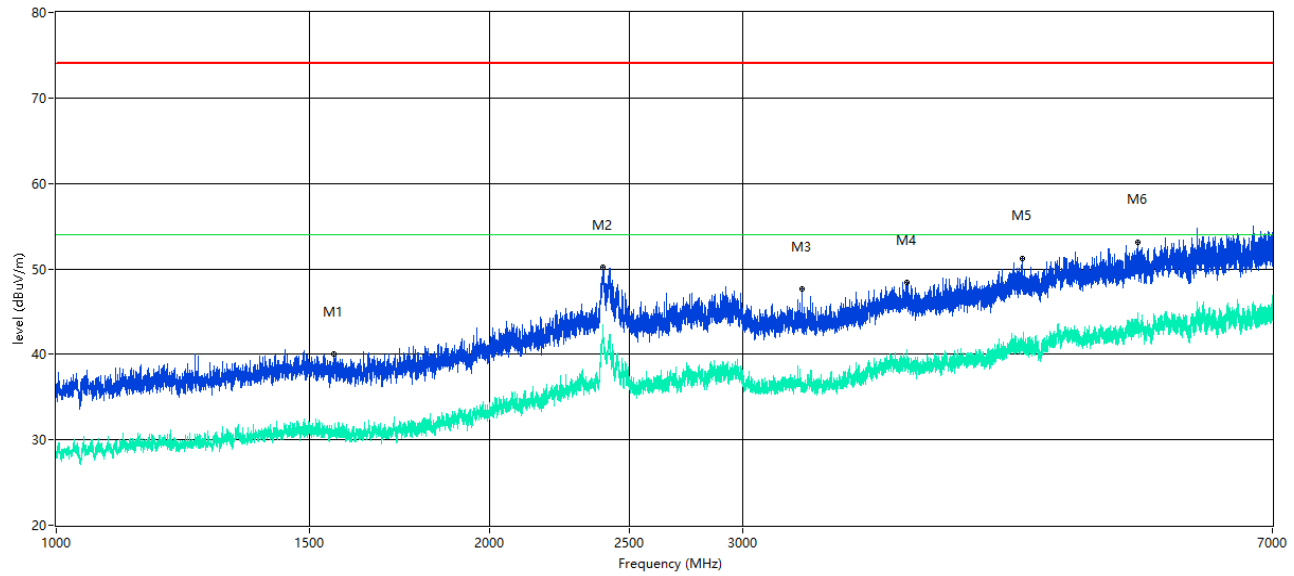

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1557.930	39.99	--	31.2	-11.86	74.0	--	54.0	22.80	102.00	100	Vertical	Pass
2397.825	50.21	--	43.5	-0.03	74.0	--	54.0	10.50	15.00	100	Vertical	Pass
3295.838	47.59	--	36.7	-5.51	74.0	--	54.0	17.30	151.00	100	Vertical	Pass
3898.763	48.36	--	40.1	-2.41	74.0	--	54.0	13.90	226.00	100	Vertical	Pass
4693.663	51.26	--	41.2	-0.30	74.0	--	54.0	12.80	124.00	100	Vertical	Pass
5646.419	53.15	--	43.2	2.15	74.0	--	54.0	10.80	12.00	100	Vertical	Pass

8-DPSK MIDDLE CHANNEL 1 GHz to 7 GHz, ANT H


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

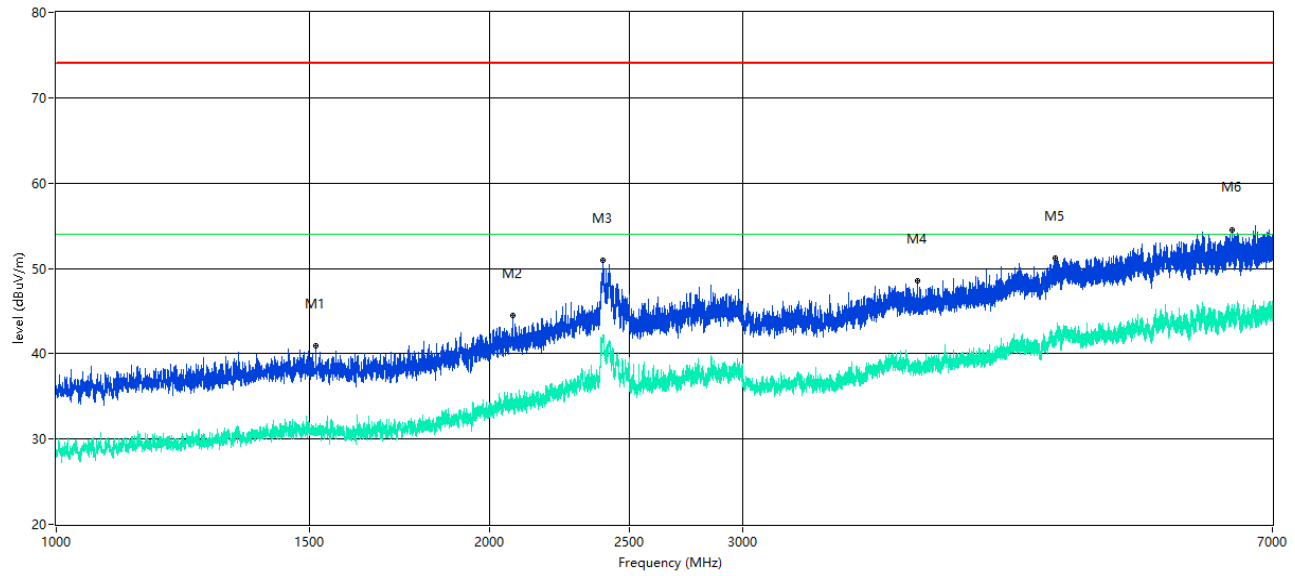

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1514.686	40.93	--	31.7	-11.84	74.0	--	54.0	22.30	269.80	100	Horizontal	Pass
2077.115	44.53	--	34.8	-8.09	74.0	--	54.0	19.20	100.80	100	Horizontal	Pass
2398.075	50.96	--	41.5	-0.03	74.0	--	54.0	12.50	98.60	100	Horizontal	Pass
3967.379	48.57	--	39.4	-3.04	74.0	--	54.0	14.60	48.40	100	Horizontal	Pass
4943.382	51.20	--	41.7	0.29	74.0	--	54.0	12.30	46.20	100	Horizontal	Pass
6563.430	54.56	--	44.8	5.99	74.0	--	54.0	9.20	356.70	100	Horizontal	Pass

8-DPSK HIGH CHANNEL 1 GHz to 7 GHz, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

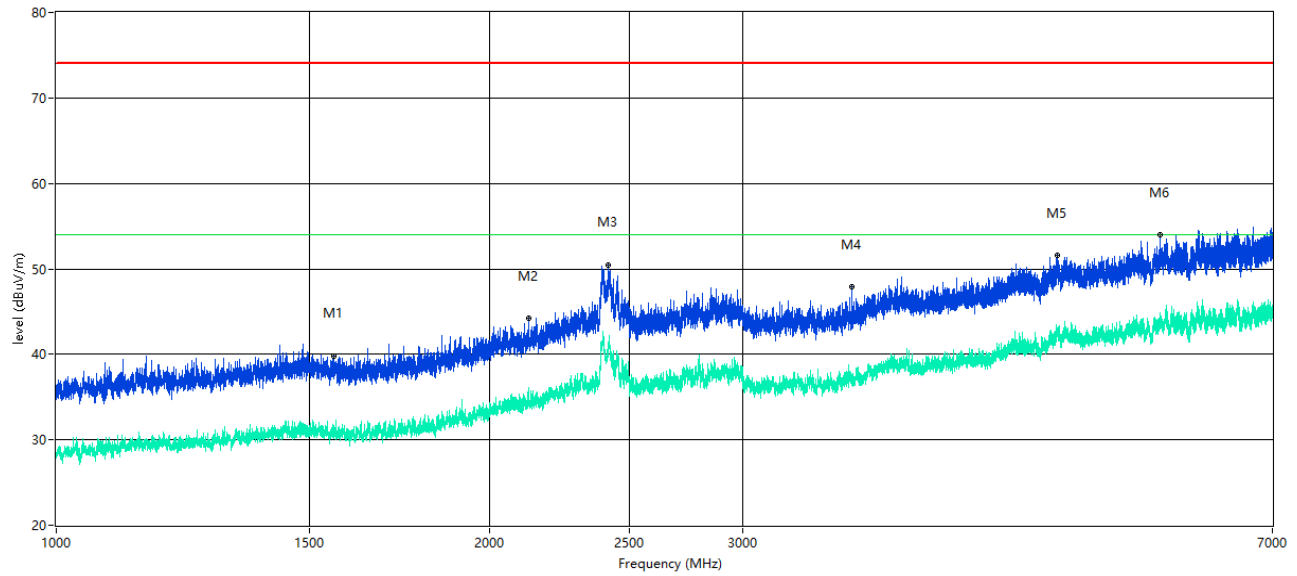

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1557.930	39.83	--	31.2	-11.86	74.0	--	54.0	22.80	17.50	100	Vertical	Pass
2128.109	44.18	--	35.5	-7.32	74.0	--	54.0	18.50	19.70	100	Vertical	Pass
2420.072	50.48	--	41.3	-0.77	74.0	--	54.0	12.70	285.50	100	Vertical	Pass
3572.928	47.95	--	37.6	-4.71	74.0	--	54.0	16.40	322.40	100	Vertical	Pass
4962.130	51.61	--	42.9	1.25	74.0	--	54.0	11.10	313.70	100	Vertical	Pass
5850.769	53.95	--	43.7	2.99	74.0	--	54.0	10.30	229.00	100	Vertical	Pass

8-DPSK HIGH CHANNEL 1 GHz to 7 GHz, ANT H


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

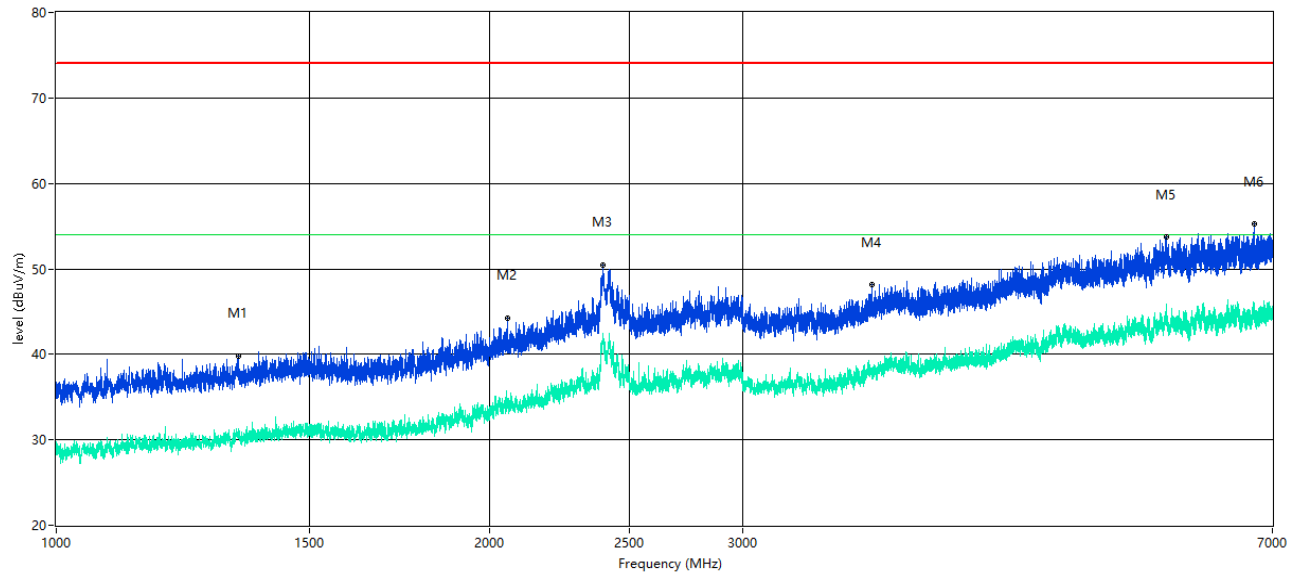

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1337.708	39.85	--	30.8	-11.75	74.0	--	54.0	23.20	77.40	100	Horizontal	Pass
2057.618	44.19	--	34.8	-8.17	74.0	--	54.0	19.20	318.00	100	Horizontal	Pass
2399.825	50.46	--	42.1	-0.08	74.0	--	54.0	11.90	157.90	100	Horizontal	Pass
3685.789	48.12	--	38.0	-3.76	74.0	--	54.0	16.00	300.50	100	Horizontal	Pass
5905.512	53.80	--	44.9	3.62	74.0	--	54.0	9.10	81.80	100	Horizontal	Pass
6805.399	55.25	--	44.7	5.65	74.0	--	54.0	9.30	177.90	100	Horizontal	Pass

GFSK LOW CHANNEL 7 GHz to 18 GHz, ANT V


R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

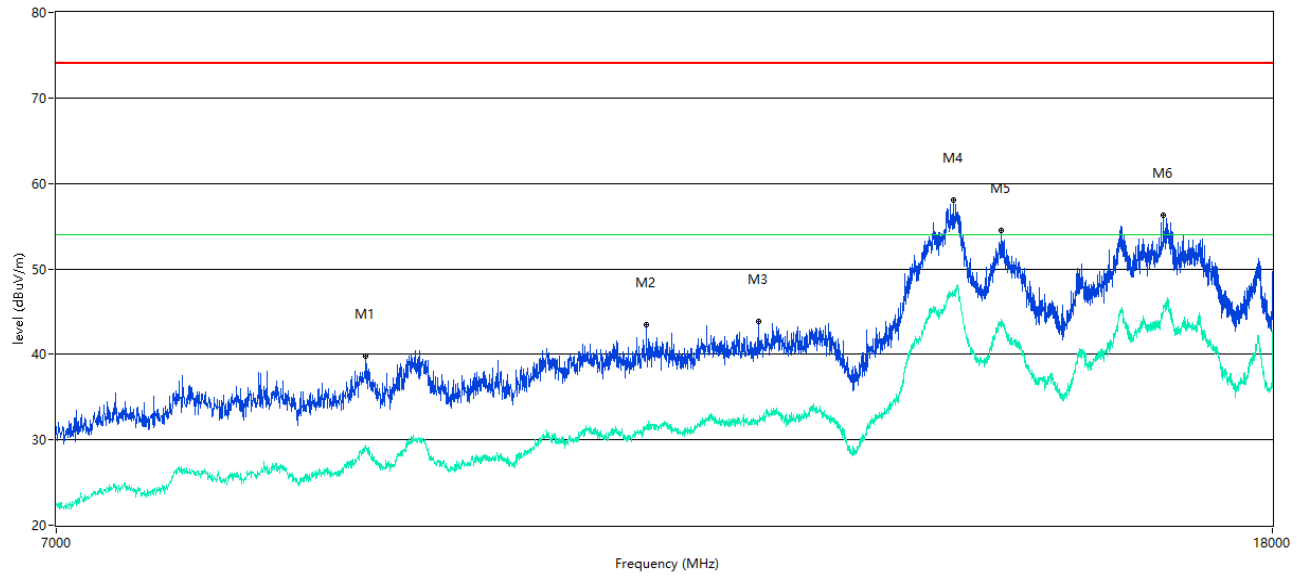

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
8902.524	39.80	--	29.1	-4.93	74.0	--	54.0	24.90	47.00	100	Vertical	Pass
11068.983	43.51	--	31.6	-1.67	74.0	--	54.0	22.40	96.00	100	Vertical	Pass
12075.231	43.83	--	32.2	-0.99	74.0	--	54.0	21.80	181.00	100	Vertical	Pass
14046.488	58.02	--	47.1	14.34	74.0	--	54.0	6.90	26.00	100	Vertical	Pass
14585.354	54.50	--	43.6	10.15	74.0	--	54.0	10.40	44.00	100	Vertical	Pass
16537.366	56.28	--	45.4	10.60	74.0	--	54.0	8.60	50.00	100	Vertical	Pass

GFSK LOW CHANNEL 7 GHz to 18 GHz, ANT H


REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

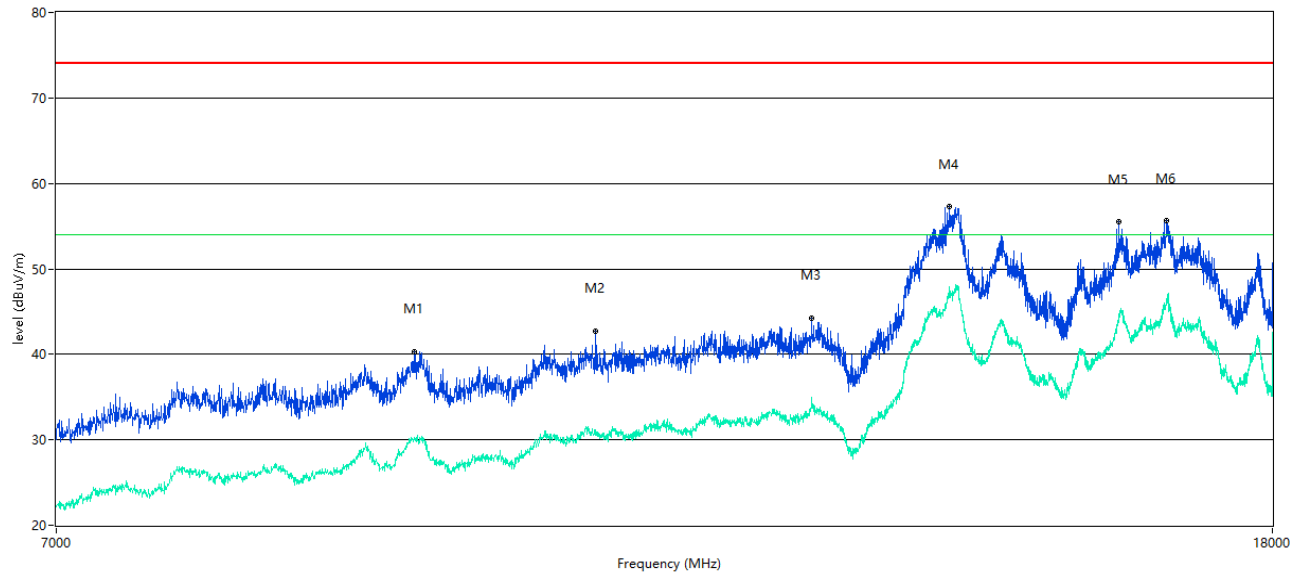

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
9243.439	40.30	--	30.2	-4.53	74.0	--	54.0	23.80	5.00	100	Horizontal	Pass
10642.839	42.77	--	30.5	-1.69	74.0	--	54.0	23.50	0.00	100	Horizontal	Pass
12586.603	44.20	--	34.0	0.16	74.0	--	54.0	20.00	12.00	100	Horizontal	Pass
14010.747	57.26	--	47.9	14.28	74.0	--	54.0	6.10	0.00	100	Horizontal	Pass
15976.506	55.57	--	44.2	9.93	74.0	--	54.0	9.80	0.00	100	Horizontal	Pass
16581.355	55.65	--	45.8	11.66	74.0	--	54.0	8.20	0.00	100	Horizontal	Pass

GFSK MIDDLE CHANNEL 7 GHz to 18 GHz, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

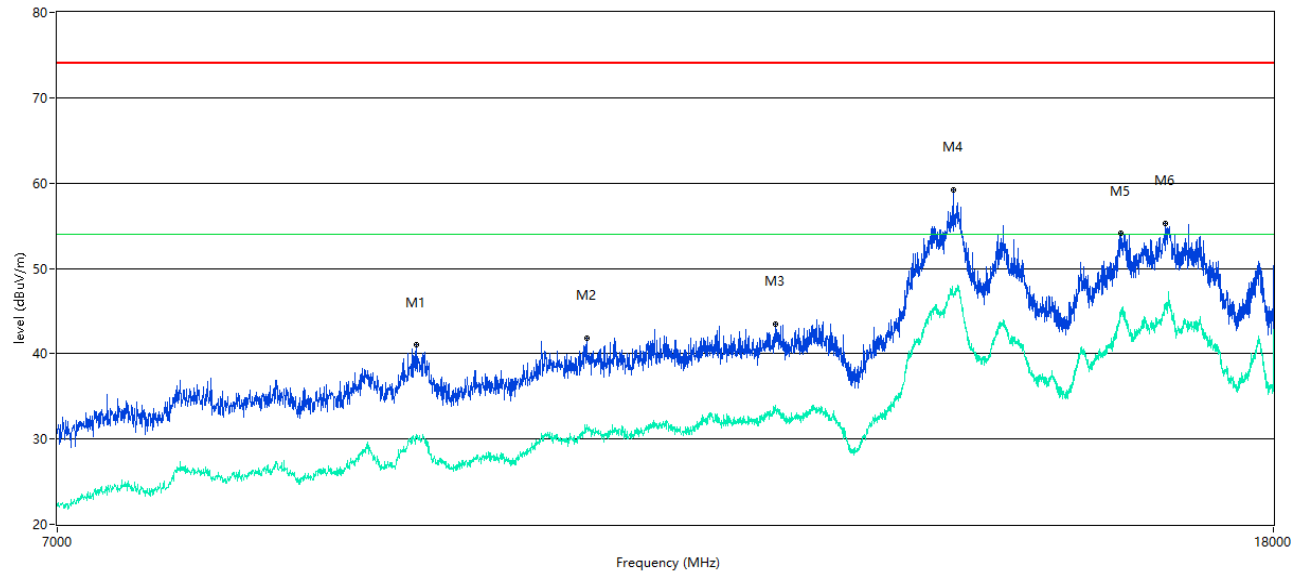

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
9248.938	41.04	--	30.2	-4.42	74.0	--	54.0	23.80	51.00	100	Vertical	Pass
10560.360	41.86	--	31.4	-2.12	74.0	--	54.0	22.60	78.00	100	Vertical	Pass
12231.942	43.53	--	33.7	-0.44	74.0	--	54.0	20.30	235.00	100	Vertical	Pass
14035.491	59.22	--	46.9	14.27	74.0	--	54.0	7.10	185.00	100	Vertical	Pass
15984.754	54.13	--	45.1	10.16	74.0	--	54.0	8.90	231.00	100	Vertical	Pass
16551.112	55.31	--	45.7	10.96	74.0	--	54.0	8.30	23.00	100	Vertical	Pass

GFSK MIDDLE CHANNEL 7 GHz to 18 GHz, ANT H


REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

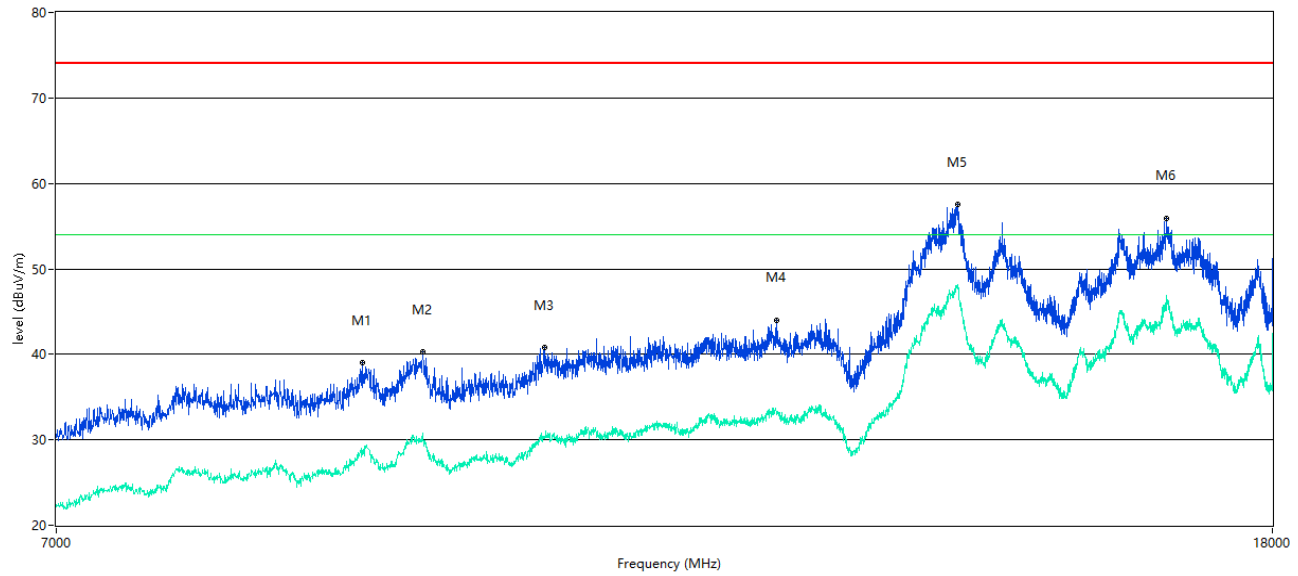

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
8877.781	39.03	--	28.2	-5.40	74.0	--	54.0	25.80	47.00	100	Horizontal	Pass
9306.673	40.29	--	30.1	-4.18	74.0	--	54.0	23.90	58.00	100	Horizontal	Pass
10224.944	40.80	--	30.3	-2.45	74.0	--	54.0	23.70	107.00	100	Horizontal	Pass
12245.689	44.02	--	32.9	-0.42	74.0	--	54.0	21.10	311.00	100	Horizontal	Pass
14101.475	57.53	--	48.2	14.72	74.0	--	54.0	5.80	165.00	100	Horizontal	Pass
16584.104	55.93	--	46.3	11.73	74.0	--	54.0	7.70	80.00	100	Horizontal	Pass

GFSK HIGH CHANNEL 7 GHz to 18 GHz, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

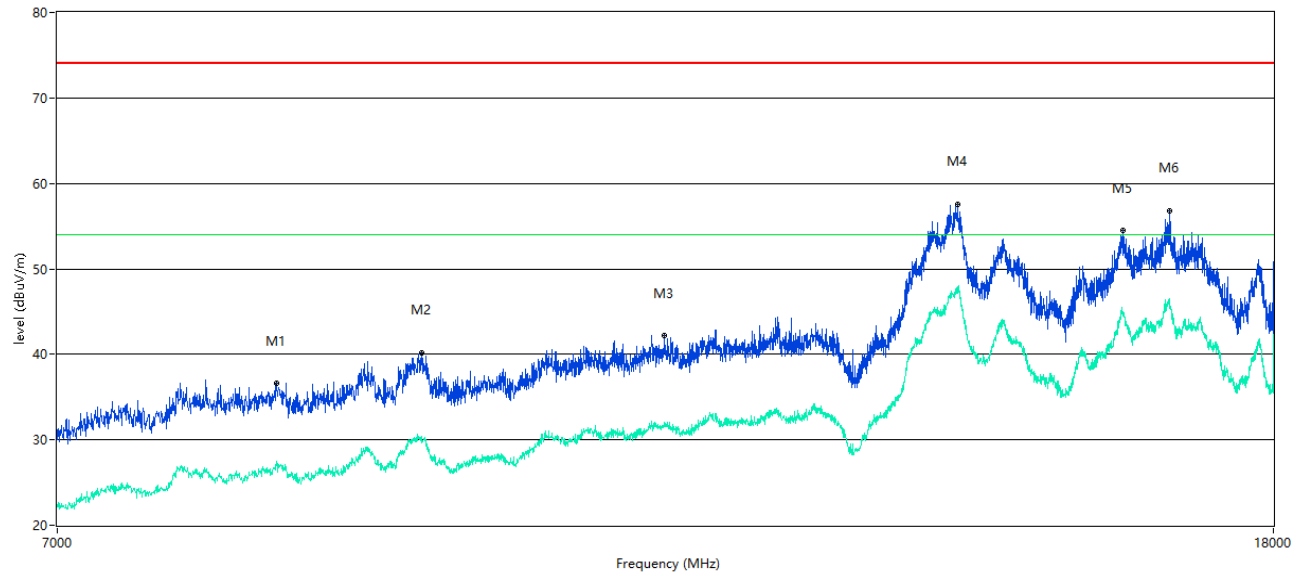

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
8300.425	36.62	--	26.9	-6.76	74.0	--	54.0	27.10	35.00	100	Vertical	Pass
9292.927	40.20	--	29.6	-4.01	74.0	--	54.0	24.40	46.00	100	Vertical	Pass
11220.195	42.18	--	31.5	-1.84	74.0	--	54.0	22.50	10.00	100	Vertical	Pass
14084.979	57.57	--	47.7	14.84	74.0	--	54.0	6.30	223.00	100	Vertical	Pass
16014.996	54.50	--	45.0	10.25	74.0	--	54.0	9.00	312.00	100	Vertical	Pass
16600.600	56.84	--	46.5	12.12	74.0	--	54.0	7.50	6.00	100	Vertical	Pass

GFSK HIGH CHANNEL 7 GHz to 18 GHz, ANT H


REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

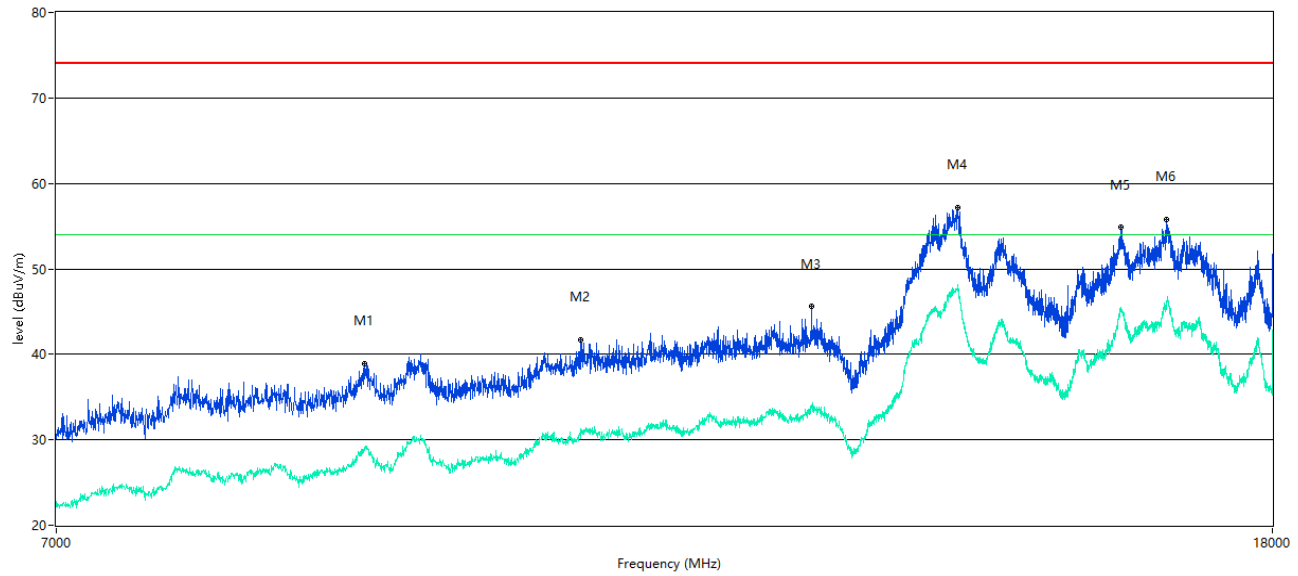

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
8894.276	38.89	--	29.1	-5.05	74.0	--	54.0	24.90	70.00	100	Horizontal	Pass
10521.870	41.73	--	31.3	-2.53	74.0	--	54.0	22.70	8.00	100	Horizontal	Pass
12583.854	45.62	--	33.8	0.16	74.0	--	54.0	20.20	265.00	100	Horizontal	Pass
14095.976	57.23	--	48.2	14.77	74.0	--	54.0	5.80	135.00	100	Horizontal	Pass
16001.250	54.82	--	45.5	10.71	74.0	--	54.0	8.50	86.00	100	Horizontal	Pass
16584.104	55.80	--	46.3	11.73	74.0	--	54.0	7.70	23.00	100	Horizontal	Pass

8-DPSK LOW CHANNEL 7 GHz to 18 GHz, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

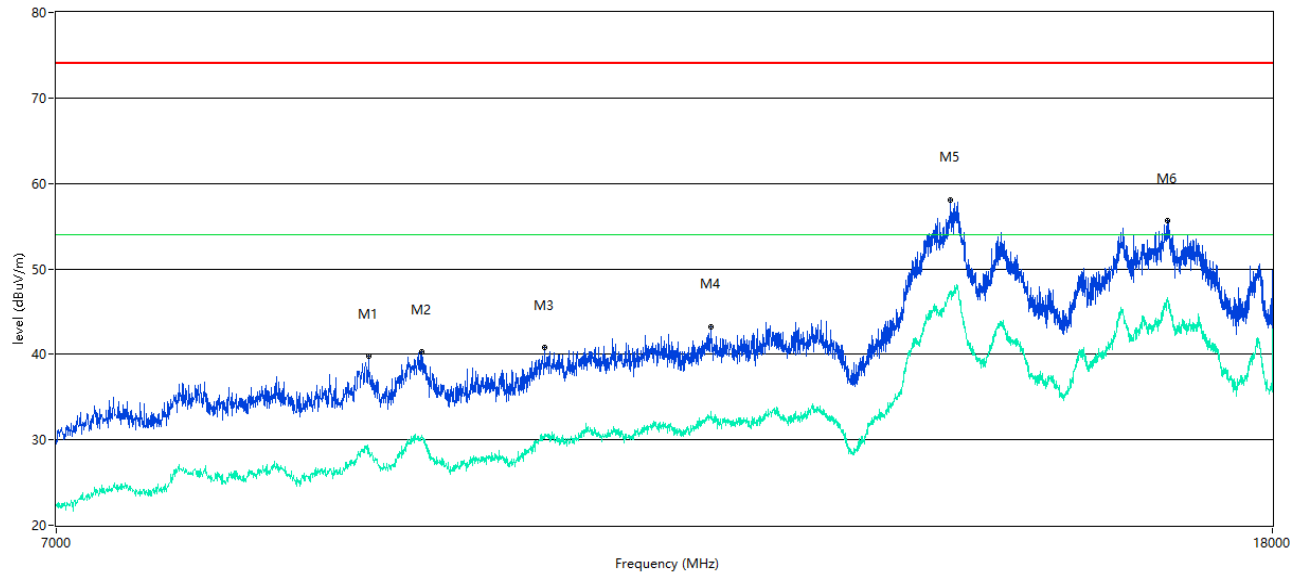

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
8921.770	39.78	--	29.0	-5.37	74.0	--	54.0	25.00	58.00	100	Vertical	Pass
9301.175	40.24	--	30.6	-4.05	74.0	--	54.0	23.40	107.00	100	Vertical	Pass
10227.693	40.76	--	30.4	-2.39	74.0	--	54.0	23.60	234.00	100	Vertical	Pass
11638.090	43.28	--	33.4	-0.77	74.0	--	54.0	20.60	10.00	100	Vertical	Pass
14016.246	58.09	--	47.2	14.24	74.0	--	54.0	6.80	185.00	100	Vertical	Pass
16589.603	55.59	--	46.4	11.84	74.0	--	54.0	7.60	6.00	100	Vertical	Pass

8-DPSK LOW CHANNEL 7 GHz to 18 GHz, ANT H


REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

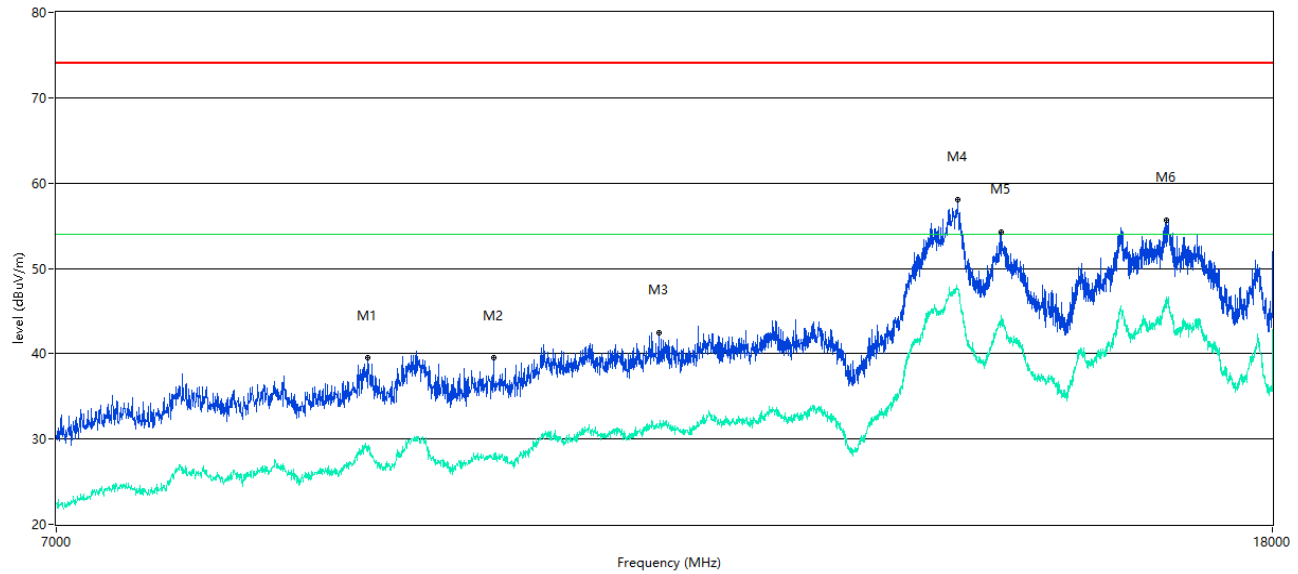

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
8919.020	39.49	--	29.0	-5.30	74.0	--	54.0	25.00	256.00	100	Horizontal	Pass
9829.043	39.52	--	27.6	-5.84	74.0	--	54.0	26.40	6.00	100	Horizontal	Pass
11176.206	42.51	--	31.6	-2.14	74.0	--	54.0	22.40	15.00	100	Horizontal	Pass
14098.725	58.07	--	47.5	14.80	74.0	--	54.0	6.50	185.00	100	Horizontal	Pass
14585.354	54.30	--	44.5	10.15	74.0	--	54.0	9.50	32.00	100	Horizontal	Pass
16584.104	55.68	--	46.6	11.73	74.0	--	54.0	7.40	8.00	100	Horizontal	Pass

8-DPSK MIDDLE CHANNEL 7 GHz to 18 GHz, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

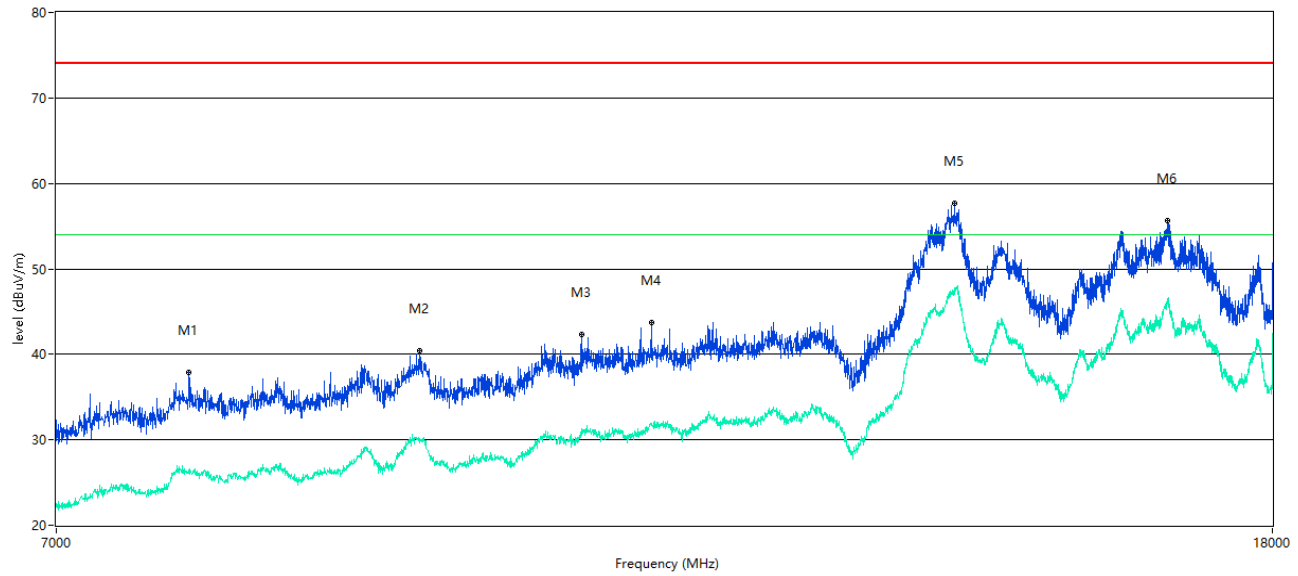

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
7758.810	37.89	--	26.4	-8.10	74.0	--	54.0	27.60	86.00	100	Vertical	Pass
9279.180	40.42	--	30.2	-4.15	74.0	--	54.0	23.80	172.00	100	Vertical	Pass
10524.619	42.27	--	31.3	-2.49	74.0	--	54.0	22.70	238.00	100	Vertical	Pass
11110.222	43.69	--	31.8	-1.81	74.0	--	54.0	22.20	98.00	100	Vertical	Pass
14062.984	57.64	--	47.6	14.50	74.0	--	54.0	6.40	15.00	100	Vertical	Pass
16597.851	55.60	--	46.6	12.09	74.0	--	54.0	7.40	127.00	100	Vertical	Pass

8-DPSK MIDDLE CHANNEL 7 GHz to 18 GHz, ANT H


REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

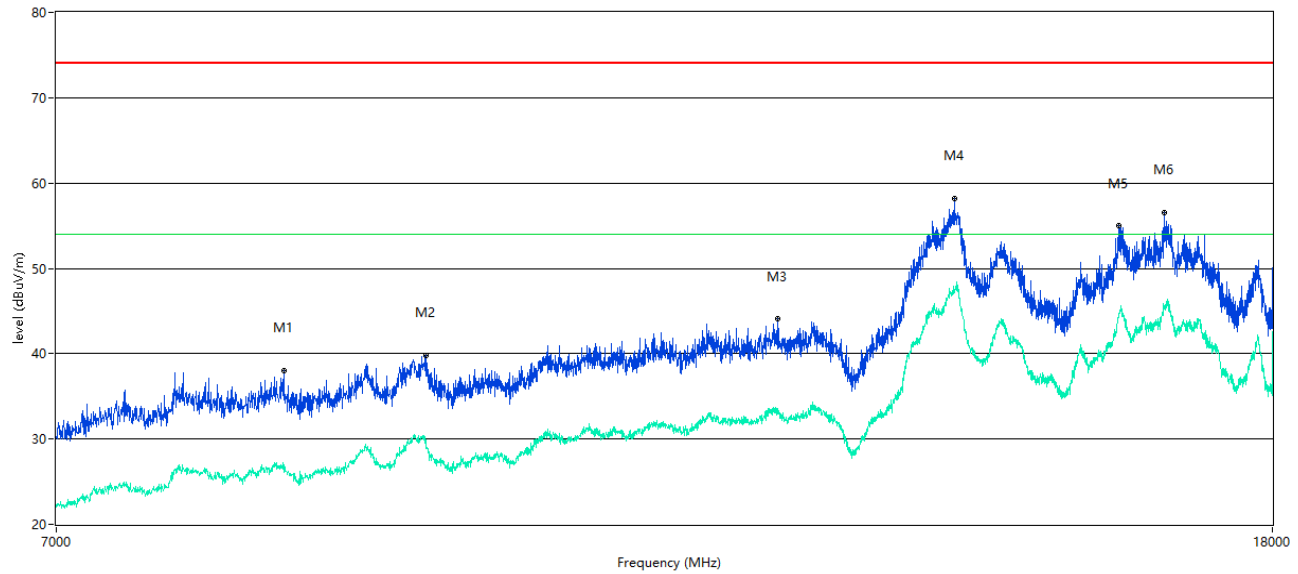

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
8352.662	38.03	--	26.9	-6.91	74.0	--	54.0	27.10	38.00	100	Horizontal	Pass
9325.919	39.79	--	29.8	-4.57	74.0	--	54.0	24.20	56.00	100	Horizontal	Pass
12256.686	44.04	--	33.5	-0.42	74.0	--	54.0	20.50	103.00	100	Horizontal	Pass
14062.984	58.21	--	47.5	14.50	74.0	--	54.0	6.50	215.00	100	Horizontal	Pass
15971.007	54.97	--	44.6	9.70	74.0	--	54.0	9.40	356.00	100	Horizontal	Pass
16545.614	56.58	--	45.3	10.89	74.0	--	54.0	8.70	16.00	100	Horizontal	Pass

8-DPSK HIGH CHANNEL 7 GHz to 18 GHz, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

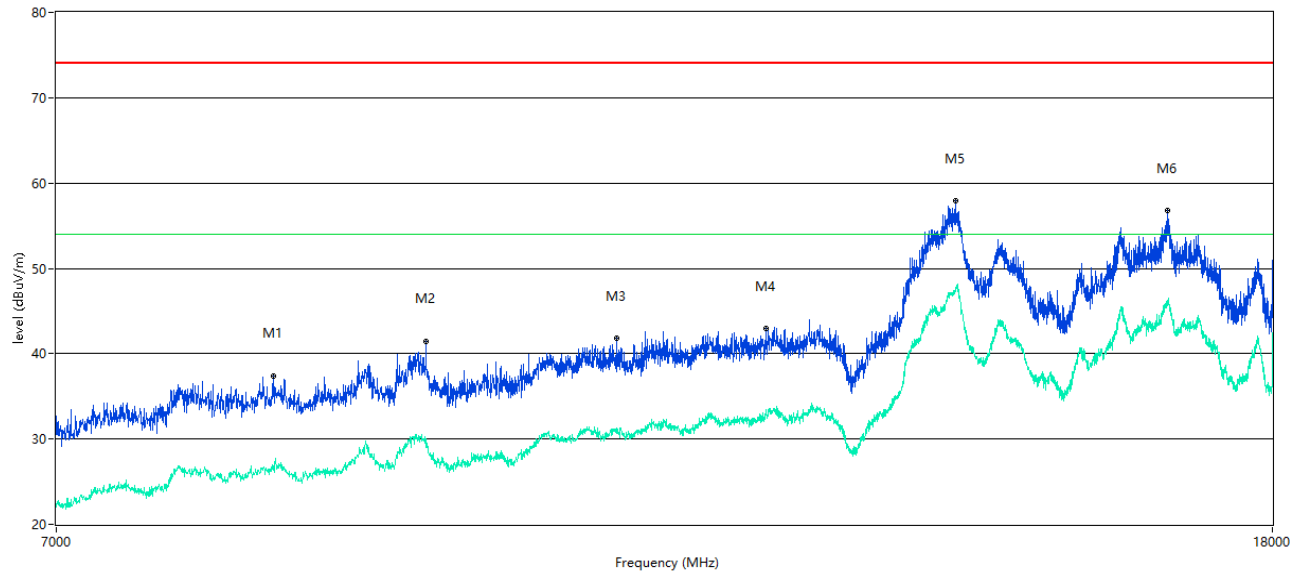

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
8283.929	37.42	--	26.9	-6.94	74.0	--	54.0	27.10	38.00	100	Vertical	Pass
9328.668	41.45	--	30.0	-4.71	74.0	--	54.0	24.00	23.00	100	Vertical	Pass
10818.795	41.80	--	30.9	-1.74	74.0	--	54.0	23.10	68.00	100	Vertical	Pass
12149.463	42.96	--	32.9	-0.71	74.0	--	54.0	21.10	320.00	100	Vertical	Pass
14071.232	57.90	--	47.3	14.57	74.0	--	54.0	6.70	123.00	100	Vertical	Pass
16597.851	56.76	--	46.2	12.09	74.0	--	54.0	7.80	77.00	100	Vertical	Pass

8-DPSK HIGH CHANNEL 7 GHz to 18 GHz, ANT H

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

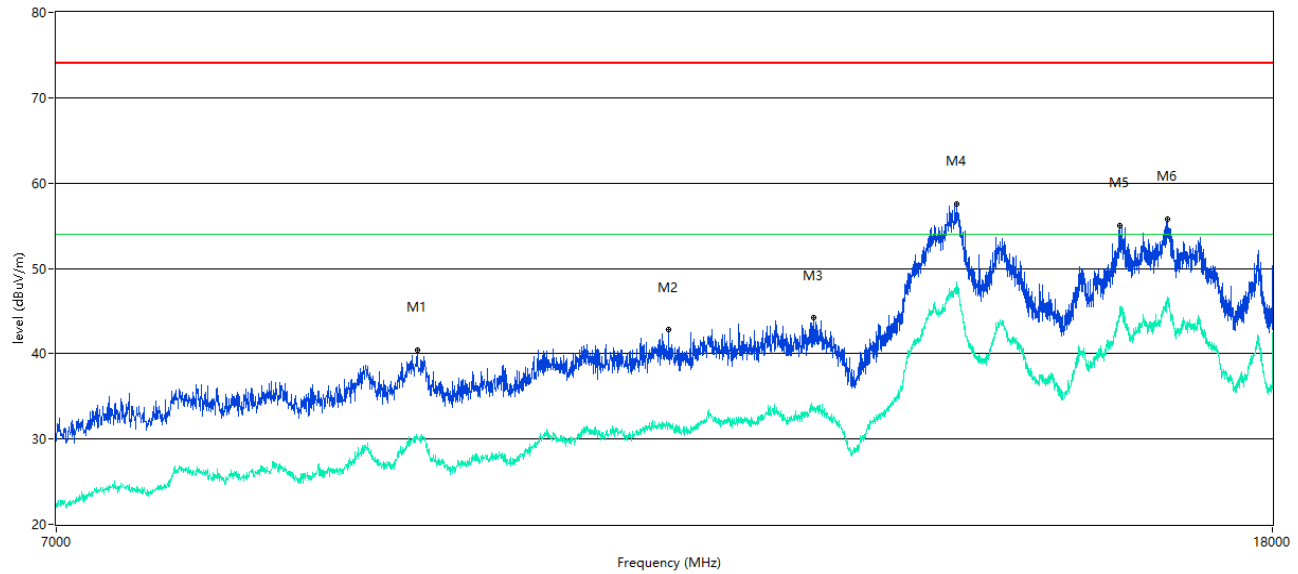


Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
9265.434	40.48	--	30.2	-4.17	74.0	--	54.0	23.80	5.00	100	Horizontal	Pass
11264.184	42.81	--	31.9	-1.75	74.0	--	54.0	22.10	48.00	100	Horizontal	Pass
12603.099	44.20	--	33.7	0.29	74.0	--	54.0	20.30	123.00	100	Horizontal	Pass
14090.477	57.60	--	48.4	14.83	74.0	--	54.0	5.60	56.00	100	Horizontal	Pass
15984.754	55.07	--	44.6	10.16	74.0	--	54.0	9.40	124.00	100	Horizontal	Pass
16595.101	55.80	--	46.4	12.00	74.0	--	54.0	7.60	6.00	100	Horizontal	Pass

Hopping Mode:

GFSK 1 GHz to 7 GHz, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

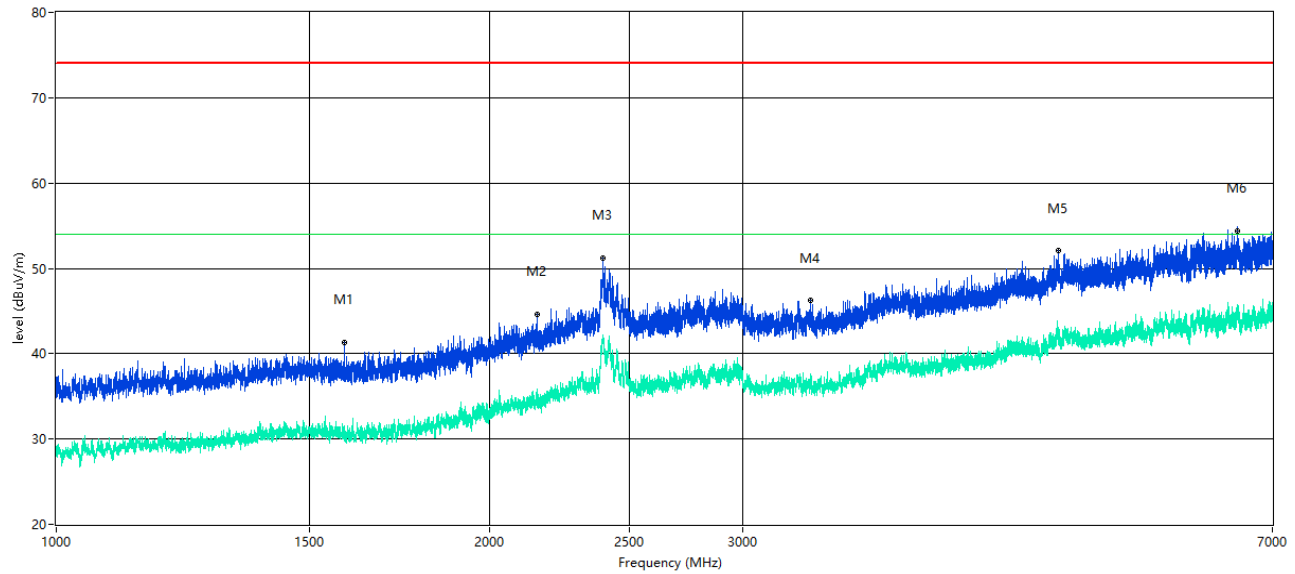

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1585.177	41.35	--	31.6	-11.88	74.0	--	54.0	22.40	1.00	100	Vertical	Pass
2157.605	44.63	--	35.9	-6.89	74.0	--	54.0	18.10	15.00	100	Vertical	Pass
2399.075	51.24	--	42.0	-0.06	74.0	--	54.0	12.00	0.00	100	Vertical	Pass
3343.457	46.25	--	37.6	-4.86	74.0	--	54.0	16.40	5.00	100	Vertical	Pass
4967.379	52.03	--	42.4	1.20	74.0	--	54.0	11.60	2.00	100	Vertical	Pass
6619.673	54.43	--	45.2	5.45	74.0	--	54.0	8.80	2.00	100	Vertical	Pass

GFSK 1 GHz to 7 GHz, ANT H


R/Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz:

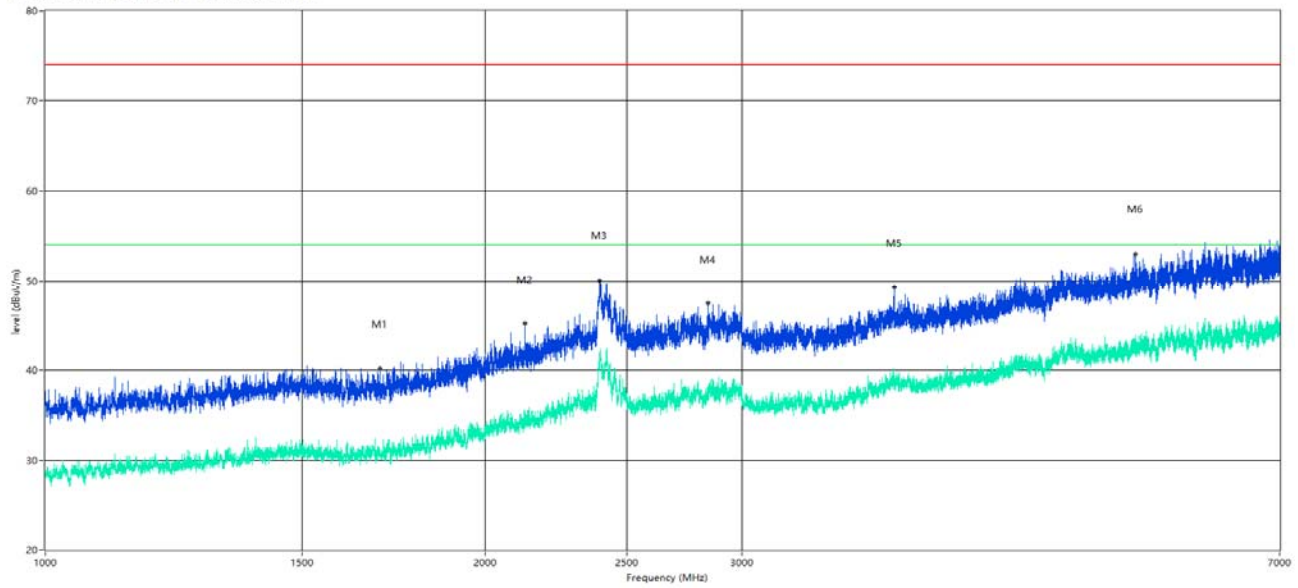

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1695.413	40.15	--	31.1	-11.97	74.0	--	54.0	22.90	108.00	100	Horizontal	Pass
2129.859	45.22	--	34.4	-7.41	74.0	--	54.0	19.60	47.00	100	Horizontal	Pass
2394.826	50.08	--	40.9	0.12	74.0	--	54.0	13.10	183.00	100	Horizontal	Pass
2842.270	47.42	--	38.2	-3.81	74.0	--	54.0	15.80	68.00	100	Horizontal	Pass
3814.398	49.23	--	38.8	-3.21	74.0	--	54.0	15.20	224.00	100	Horizontal	Pass
5580.052	53.03	--	43.9	2.16	74.0	--	54.0	10.10	10.00	100	Horizontal	Pass

8-DPSK 1 GHz to 7 GHz, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

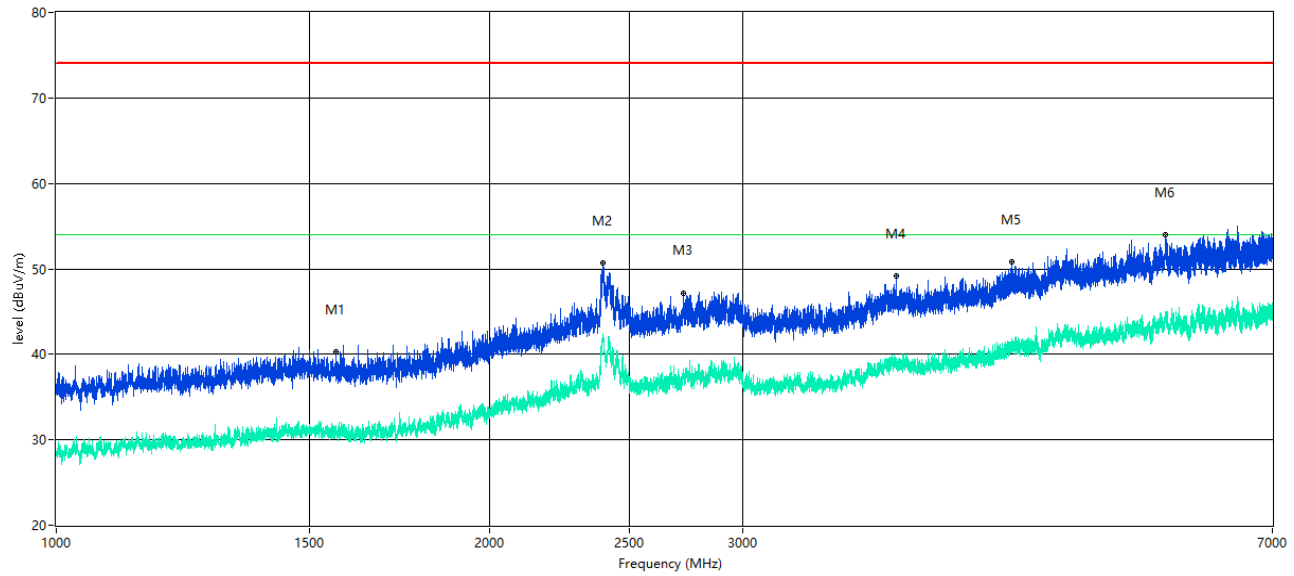

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1563.930	40.29	--	31.2	-11.71	74.0	--	54.0	22.80	174.00	100	Vertical	Pass
2399.575	50.67	--	42.5	-0.07	74.0	--	54.0	11.50	353.10	100	Vertical	Pass
2726.784	47.14	--	37.7	-3.45	74.0	--	54.0	16.30	206.60	100	Vertical	Pass
3835.771	49.15	--	38.8	-2.80	74.0	--	54.0	15.20	63.30	100	Vertical	Pass
4615.673	50.83	--	41.3	0.06	74.0	--	54.0	12.70	156.40	100	Vertical	Pass
5895.388	54.00	--	44.6	2.78	74.0	--	54.0	9.40	275.30	100	Vertical	Pass

8-DPSK 1 GHz to 7 GHz, ANT H


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

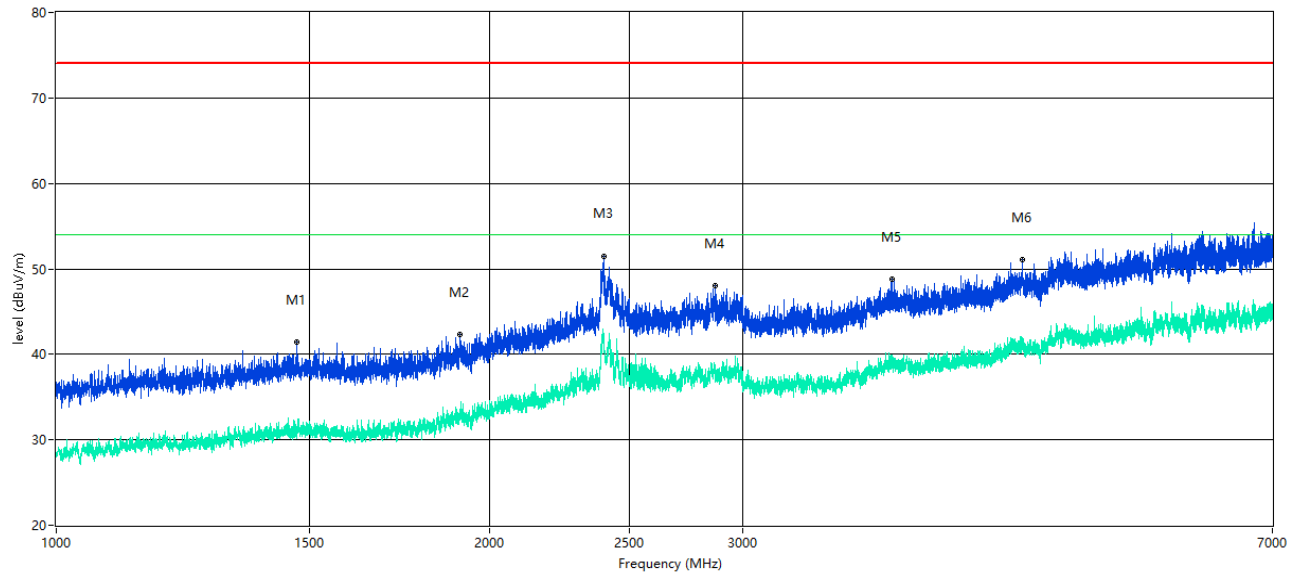

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1468.941	41.43	--	31.5	-11.62	74.0	--	54.0	22.50	198.10	100	Horizontal	Pass
1908.886	42.30	--	33.5	-8.84	74.0	--	54.0	20.50	211.20	100	Horizontal	Pass
2400.075	51.52	--	41.5	-0.08	74.0	--	54.0	12.50	287.00	100	Horizontal	Pass
2868.016	48.06	--	38.0	-2.89	74.0	--	54.0	16.00	106.20	100	Horizontal	Pass
3810.274	48.76	--	39.5	-2.72	74.0	--	54.0	14.50	132.40	100	Horizontal	Pass
4692.163	51.10	--	41.6	-0.21	74.0	--	54.0	12.40	326.50	100	Horizontal	Pass

GFSK 7 GHz to 18 GHz, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

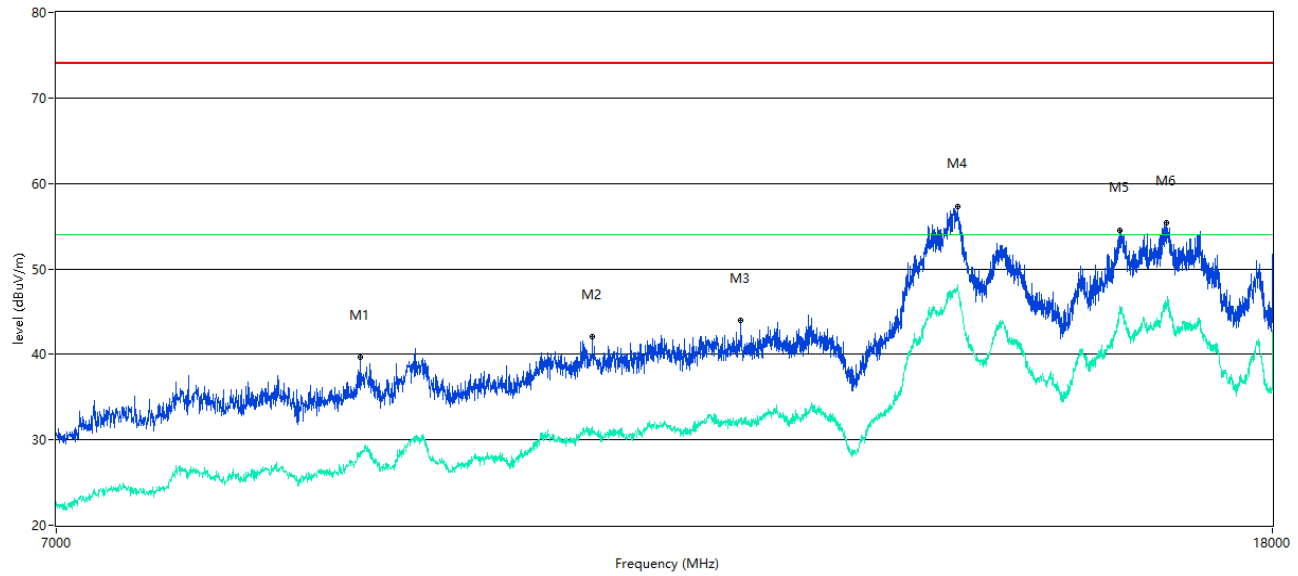

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
8861.285	39.60	--	28.6	-5.63	74.0	--	54.0	25.40	47.00	100	Vertical	Pass
10615.346	42.05	--	31.5	-1.61	74.0	--	54.0	22.50	123.00	100	Vertical	Pass
11910.272	43.92	--	32.4	-0.76	74.0	--	54.0	21.60	64.00	100	Vertical	Pass
14101.475	57.33	--	47.7	14.72	74.0	--	54.0	6.30	3.00	100	Vertical	Pass
15990.252	54.54	--	45.6	10.35	74.0	--	54.0	8.40	234.00	100	Vertical	Pass
16578.605	55.36	--	46.0	11.59	74.0	--	54.0	8.00	119.00	100	Vertical	Pass

GFSK 7 GHz to 18 GHz, ANT H


REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

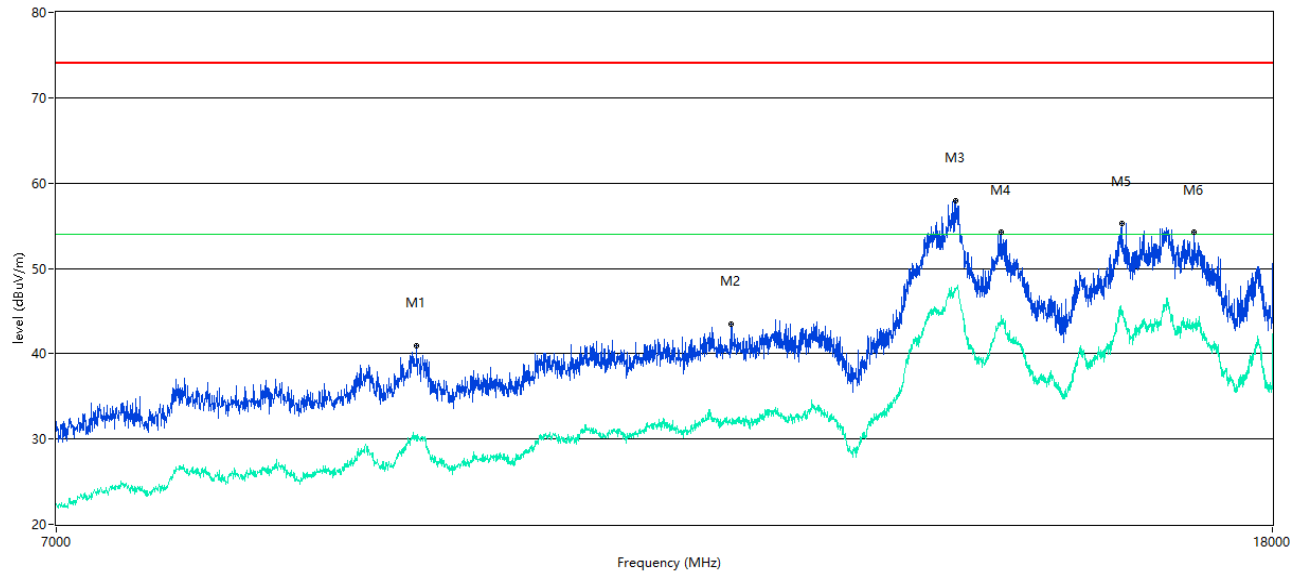

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
9262.684	40.98	--	30.4	-4.23	74.0	--	54.0	23.60	103.00	100	Horizontal	Pass
11819.545	43.49	--	31.8	-1.05	74.0	--	54.0	22.20	0.00	100	Horizontal	Pass
14079.480	57.95	--	47.7	14.72	74.0	--	54.0	6.30	28.00	100	Horizontal	Pass
14582.604	54.20	--	44.5	10.13	74.0	--	54.0	9.50	78.00	100	Horizontal	Pass
16009.498	55.22	--	45.0	10.44	74.0	--	54.0	9.00	335.00	100	Horizontal	Pass
16941.515	54.21	--	43.1	9.08	74.0	--	54.0	10.90	28.00	100	Horizontal	Pass

8-DPSK 7 GHz to 18 GHz, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

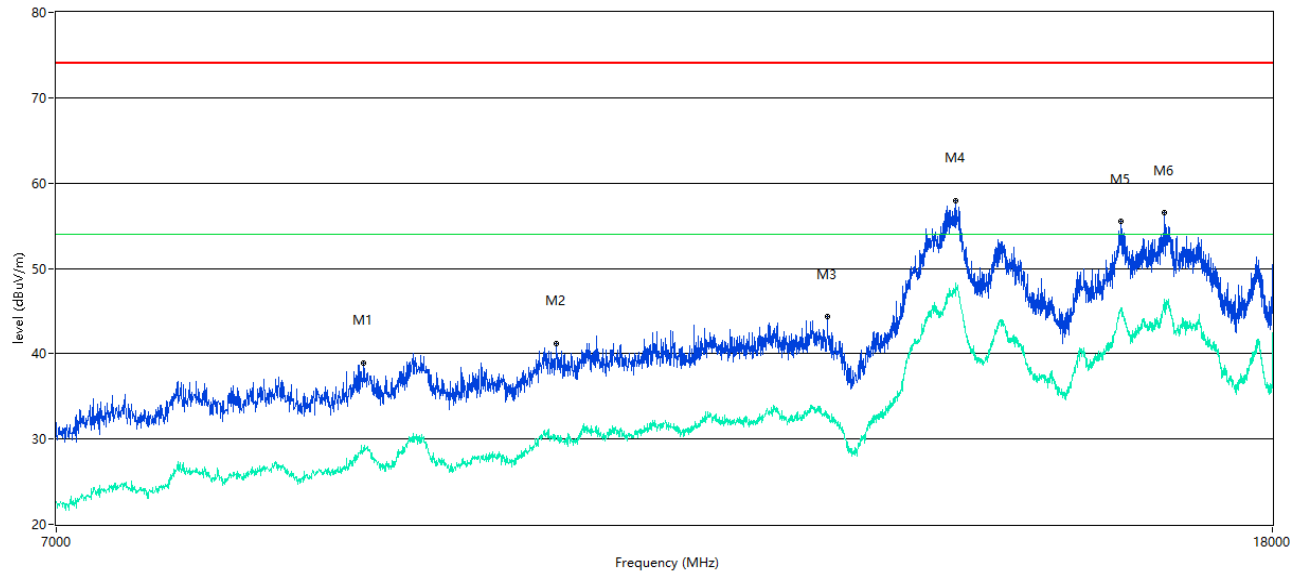

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
8888.778	38.94	--	29.0	-5.23	74.0	--	54.0	25.00	47.00	100	Vertical	Pass
10323.919	41.23	--	30.1	-2.33	74.0	--	54.0	23.90	127.00	100	Vertical	Pass
12740.565	44.29	--	32.5	-0.64	74.0	--	54.0	21.50	33.00	100	Vertical	Pass
14079.480	57.92	--	47.7	14.72	74.0	--	54.0	6.30	214.00	100	Vertical	Pass
15998.500	55.48	--	45.1	10.69	74.0	--	54.0	8.90	26.00	100	Vertical	Pass
16553.862	56.54	--	45.5	11.00	74.0	--	54.0	8.50	38.00	100	Vertical	Pass

8-DPSK 7 GHz to 18 GHz, ANT H

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

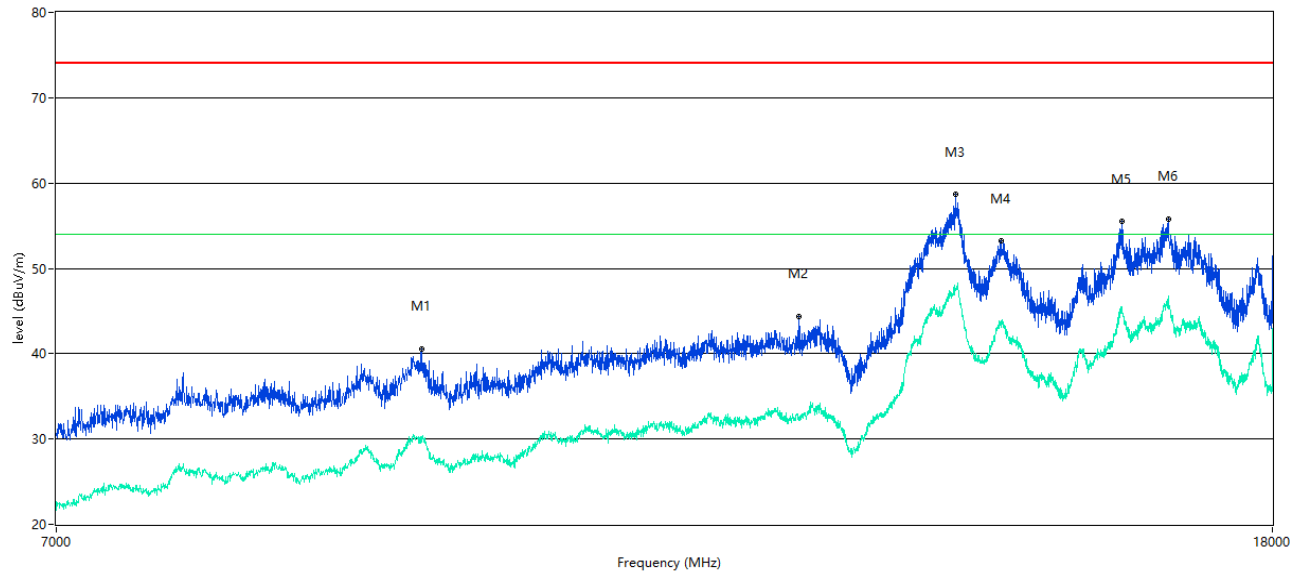

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
9298.425	40.58	--	30.2	-4.02	74.0	--	54.0	23.80	58.00	100	Horizontal	Pass
12465.634	44.35	--	32.5	-0.57	74.0	--	54.0	21.50	102.00	100	Horizontal	Pass
14073.982	58.66	--	47.6	14.60	74.0	--	54.0	6.40	215.00	100	Horizontal	Pass
14577.106	53.24	--	43.7	10.11	74.0	--	54.0	10.30	315.00	100	Horizontal	Pass
16017.746	55.49	--	45.2	10.15	74.0	--	54.0	8.80	42.00	100	Horizontal	Pass
16603.349	55.82	--	46.8	12.02	74.0	--	54.0	7.20	6.00	100	Horizontal	Pass

A.9 Band Edge (Restricted-band band-edge)


Note¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note³: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Test Plots


GFSK LOW CHANNEL, ANT V

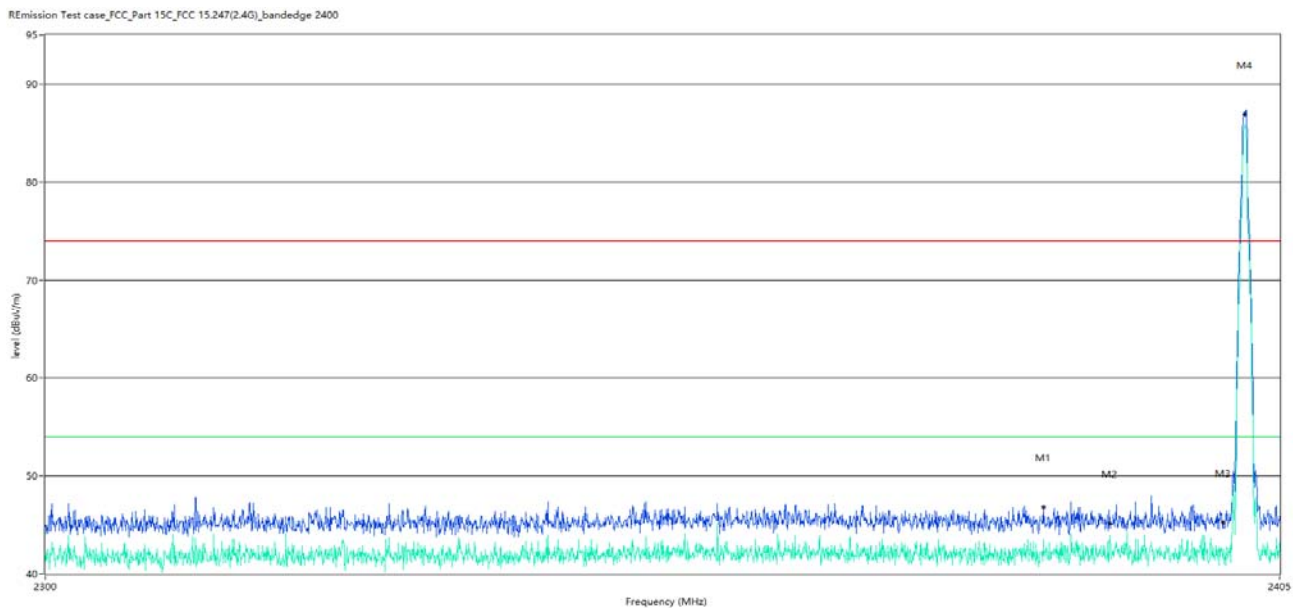

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
2384.529	46.86	--	43.5	36.01	74.0	--	54.0	10.50	20.20	100	Vertical	Pass
2390.000	45.19	--	41.6	36.09	74.0	--	54.0	12.40	242.47	100	Vertical	Pass
2400.000	45.38	--	42.2	35.93	74.0	--	54.0	11.80	232.70	100	Vertical	Pass
2402.000	86.92	--	85.6	35.95	74.0	--	54.0	-31.60	329.58	100	Vertical	N.A

GFSK LOW CHANNEL, ANT H


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

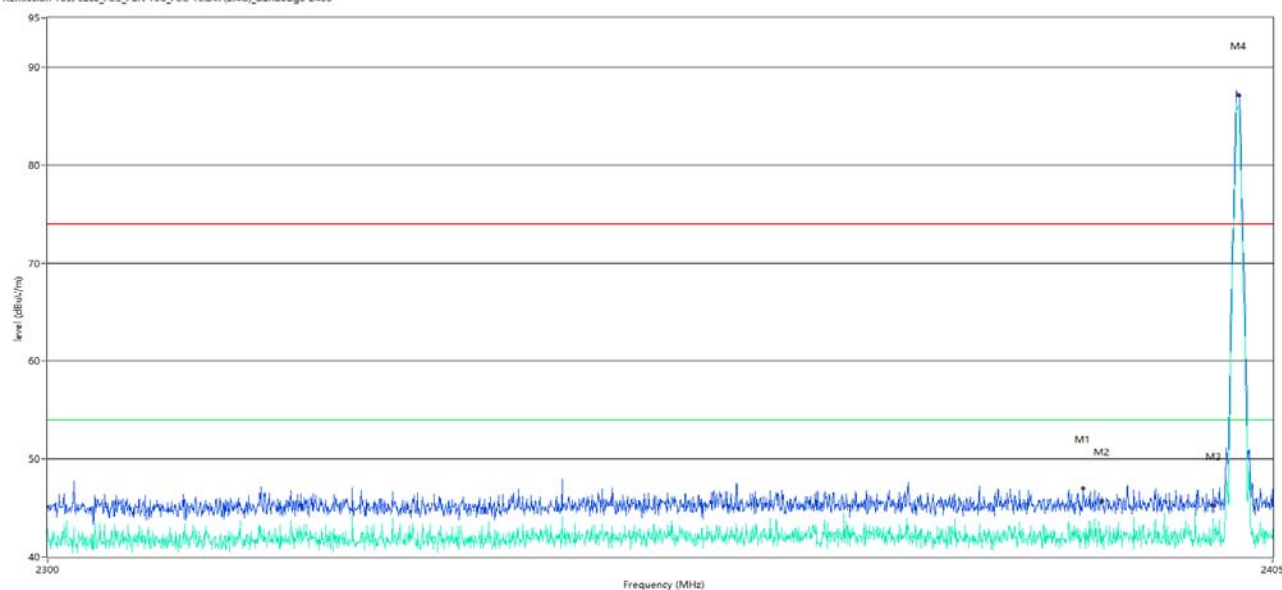

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
2388.428	47.01	--	42.3	36.09	74.0	--	54.0	11.70	151.70	100	Horizontal	Pass
2390.000	45.64	--	42.3	36.09	74.0	--	54.0	11.70	199.46	100	Horizontal	Pass
2400.000	45.31	--	42.5	35.93	74.0	--	54.0	11.50	272.95	100	Horizontal	Pass
2402.000	87.26	--	85.6	35.95	74.0	--	54.0	-31.60	328.53	100	Horizontal	N.A

GFSK HIGH CHANNEL, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2480

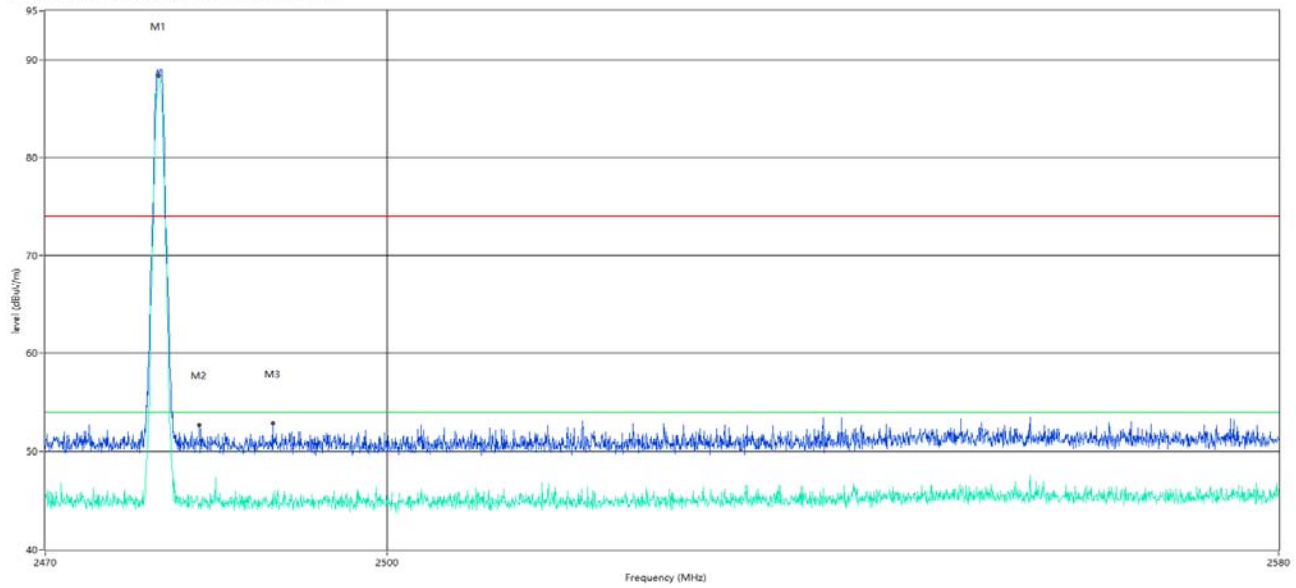

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
2480.000	88.76	--	88.1	35.96	74.0	--	54.0	-34.10	336.60	100	Vertical	N.A
2483.500	52.64	--	44.5	35.93	74.0	--	54.0	9.50	307.40	100	Vertical	Pass
2489.933	52.87	--	44.8	35.86	74.0	--	54.0	9.20	310.90	100	Vertical	Pass

GFSK HIGH CHANNEL, ANT H


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2480

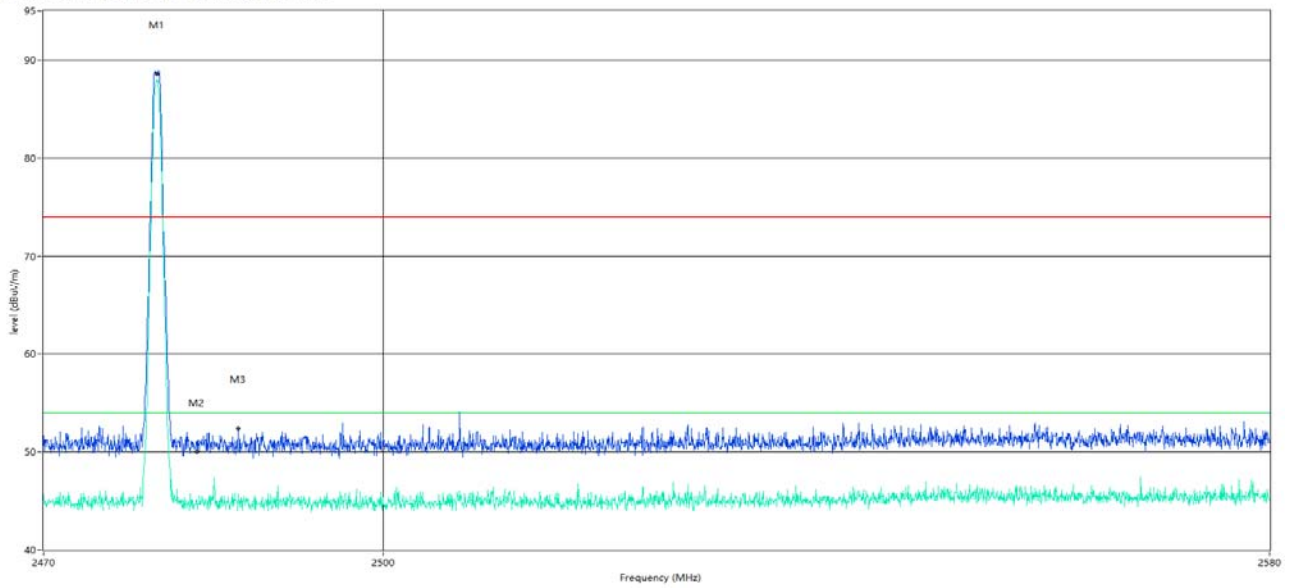

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
2480.000	88.58	--	87.8	35.96	74.0	--	54.0	-33.80	341.20	100	Horizontal	N.A
2483.500	50.01	--	45.0	35.93	74.0	--	54.0	9.00	44.37	100	Horizontal	Pass
2487.143	52.37	--	45.7	35.89	74.0	--	54.0	8.30	221.30	100	Horizontal	Pass

8-DPSK LOW CHANNEL, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

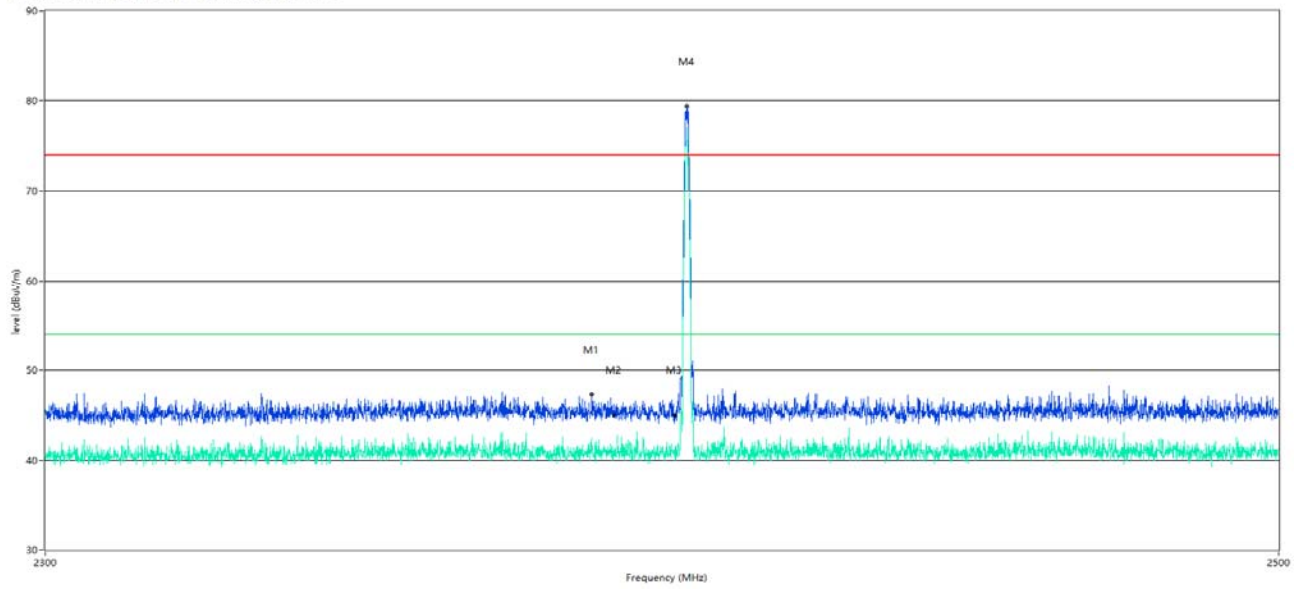

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
2386.578	47.29	--	42.4	36.06	74.0	--	54.0	11.60	10.80	100	Vertical	Pass
2390.000	44.89	--	40.4	36.09	74.0	--	54.0	13.60	269.38	100	Vertical	Pass
2400.000	45.08	--	40.4	35.93	74.0	--	54.0	13.60	147.25	100	Vertical	Pass
2401.975	79.40	--	77.0	35.95	74.0	--	54.0	-23.00	283.10	100	Vertical	N.A

8-DPSK LOW CHANNEL, ANT H


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

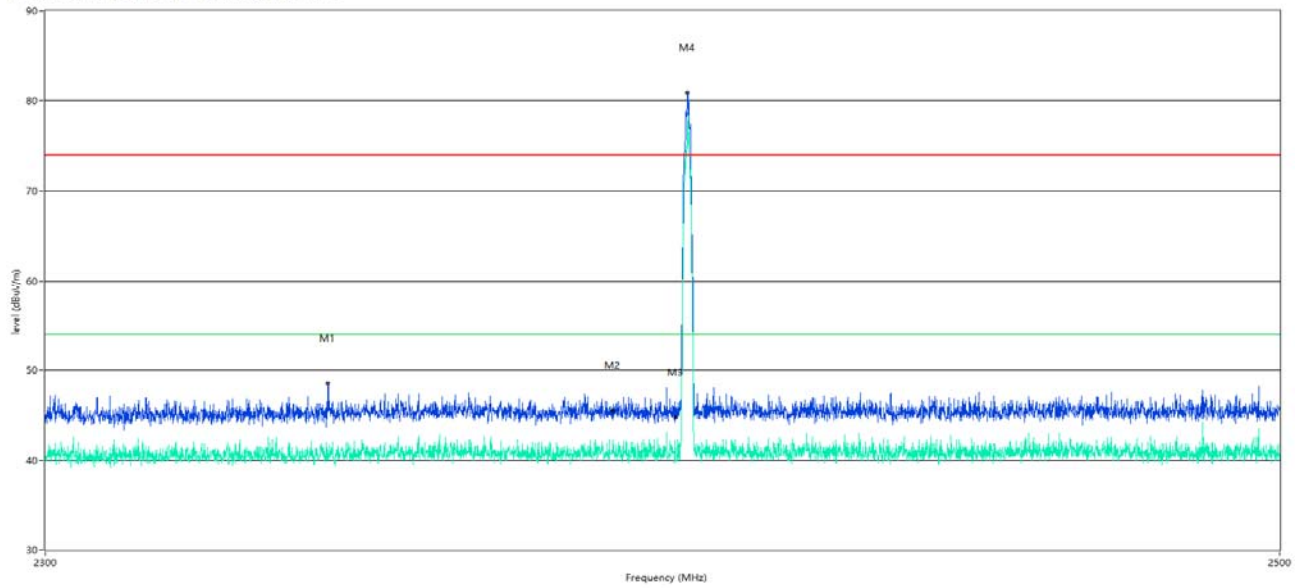

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
2344.339	48.51	--	41.0	35.95	74.0	--	54.0	13.00	152.90	100	Horizontal	Pass
2390.000	45.39	--	41.1	36.09	74.0	--	54.0	12.90	198.41	100	Horizontal	Pass
2400.000	44.79	--	40.7	35.93	74.0	--	54.0	13.30	58.60	100	Horizontal	Pass
2401.975	80.94	--	78.8	35.95	74.0	--	54.0	-24.80	184.80	100	Horizontal	N.A

8-DPSK HIGH CHANNEL, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2480

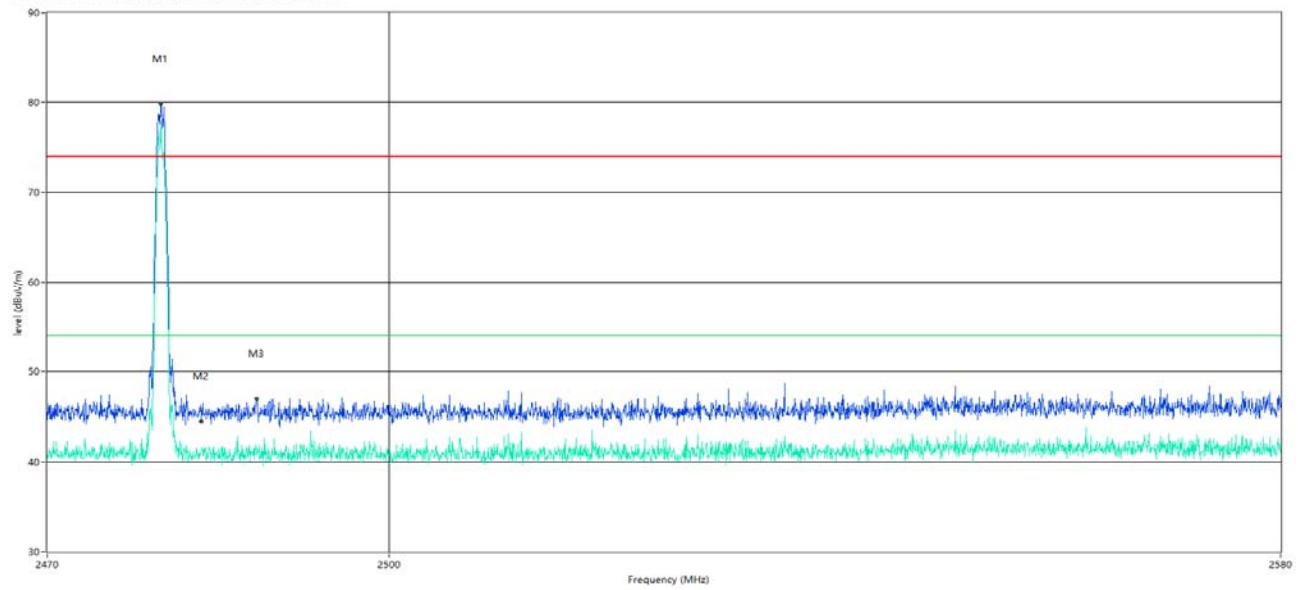

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
2479.945	79.91	--	77.9	35.96	74.0	--	54.0	-23.90	249.80	100	Vertical	N.A
2483.500	44.45	--	41.4	35.93	74.0	--	54.0	12.60	134.95	100	Vertical	Pass
2488.313	46.96	--	41.4	35.88	74.0	--	54.0	12.60	143.60	100	Vertical	Pass

8-DPSK HIGH CHANNEL, ANT H

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2480

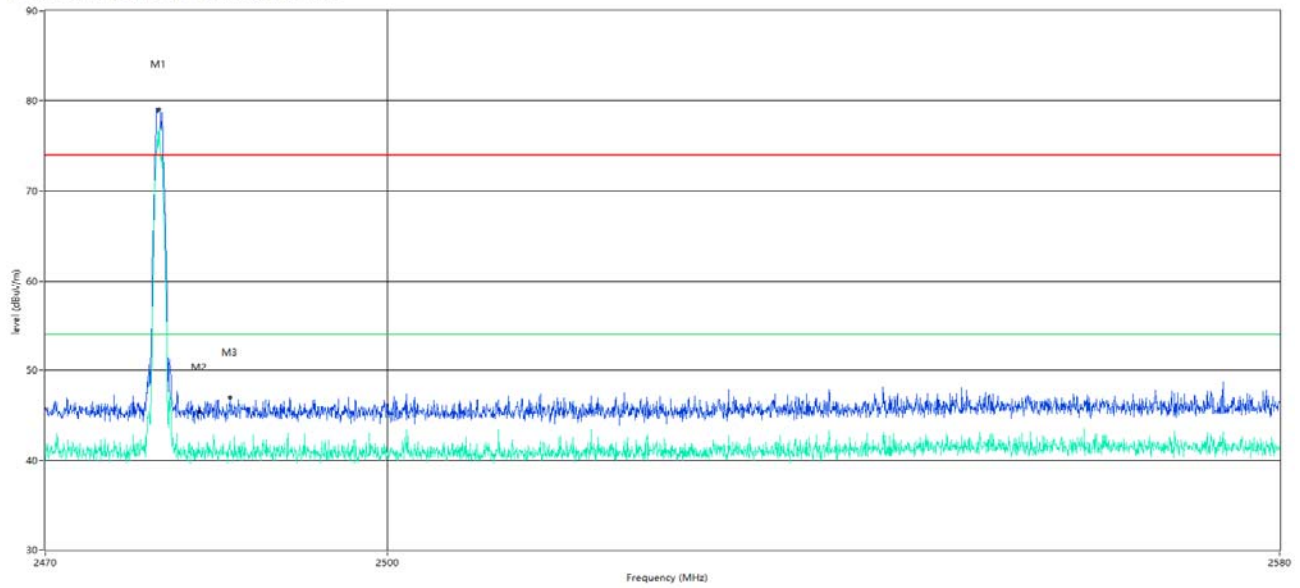


Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
2479.945	79.12	--	76.2	35.96	74.0	--	54.0	-22.20	257.40	100	Horizontal	N.A
2483.500	45.39	--	40.7	35.93	74.0	--	54.0	13.30	78.85	100	Horizontal	Pass
2486.153	46.98	--	42.1	35.90	74.0	--	54.0	11.90	61.00	100	Horizontal	Pass

Hopping Mode:

GFSK FREQUENCY BAND, ANT V


R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

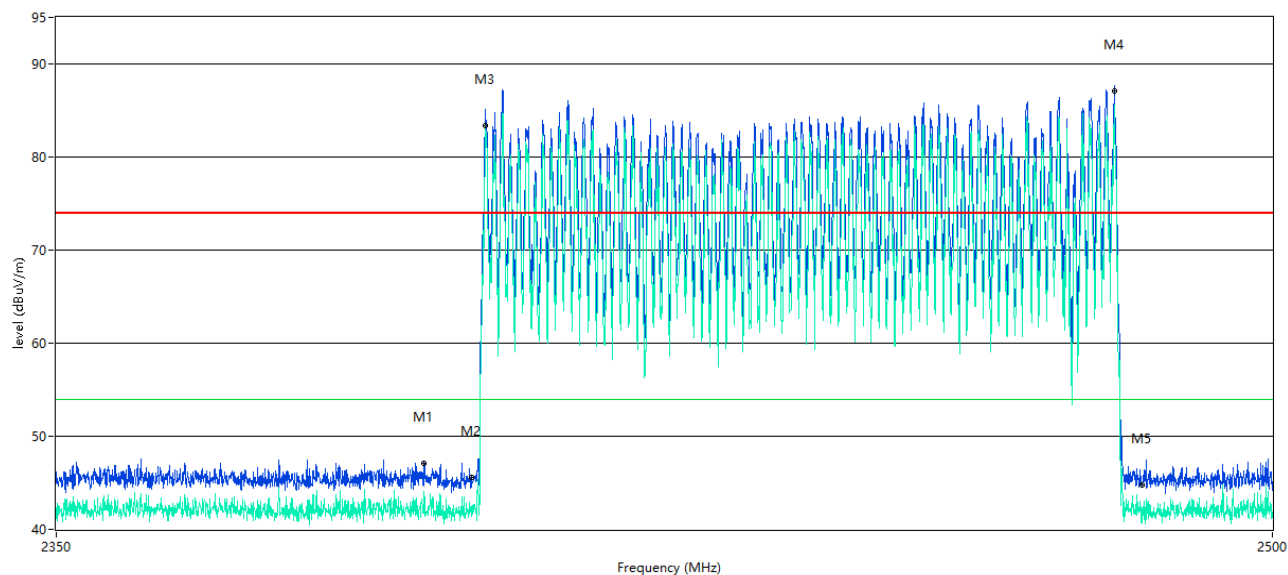

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
2394.376	47.07	--	44.1	35.99	74.0	--	54.0	9.90	227.90	100	Vertical	Pass
2400.000	45.56	--	42.4	35.93	74.0	--	54.0	11.60	225.25	100	Vertical	Pass
2402.000	82.99	--	81.6	35.95	74.0	--	54.0	-27.60	317.10	100	Vertical	N.A
2480.000	87.15	--	85.1	35.96	74.0	--	54.0	-31.10	339.50	100	Vertical	N.A
2483.500	44.74	--	40.8	35.93	74.0	--	54.0	13.20	120.54	100	Vertical	Pass

GFSK FREQUENCY BAND, ANT H


R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

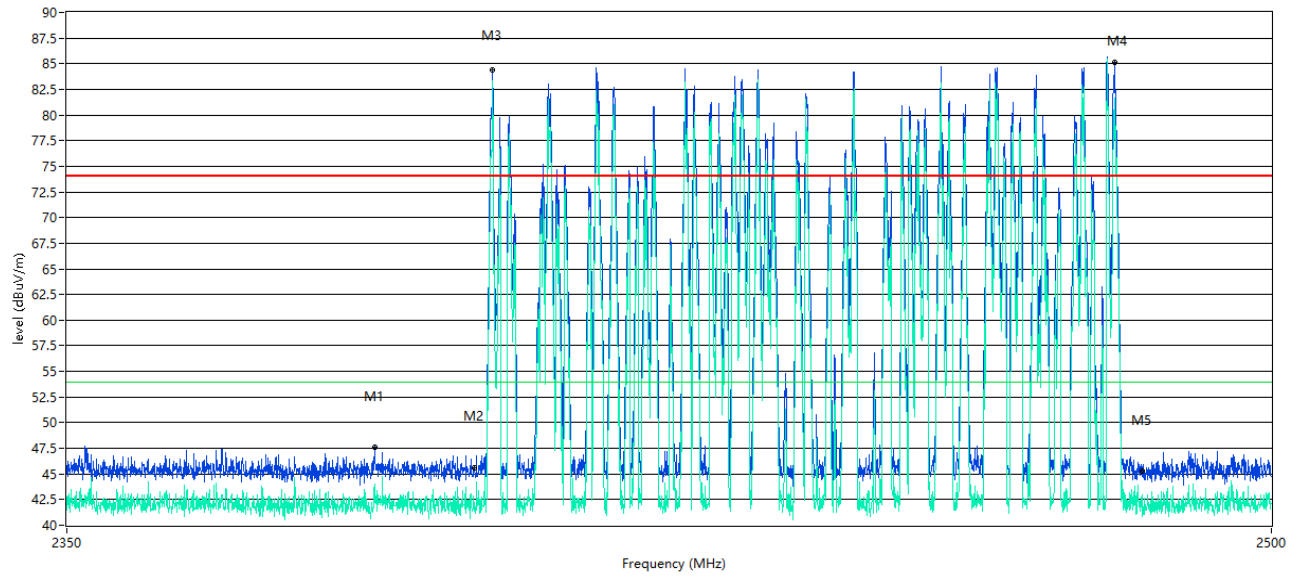

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
2387.428	47.56	--	44.1	36.08	74.0	--	54.0	9.90	262.00	100	Horizontal	Pass
2400.000	45.75	--	42.9	35.93	74.0	--	54.0	11.10	100.05	100	Horizontal	Pass
2401.975	84.37	--	83.4	35.95	74.0	--	54.0	-29.40	318.80	100	Horizontal	N.A
2480.005	85.13	--	81.6	35.96	74.0	--	54.0	-27.60	0.80	100	Horizontal	N.A
2483.500	45.36	--	42.1	35.93	74.0	--	54.0	11.90	345.46	100	Horizontal	Pass

8-DPSK FREQUENCY BAND, ANT V


R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

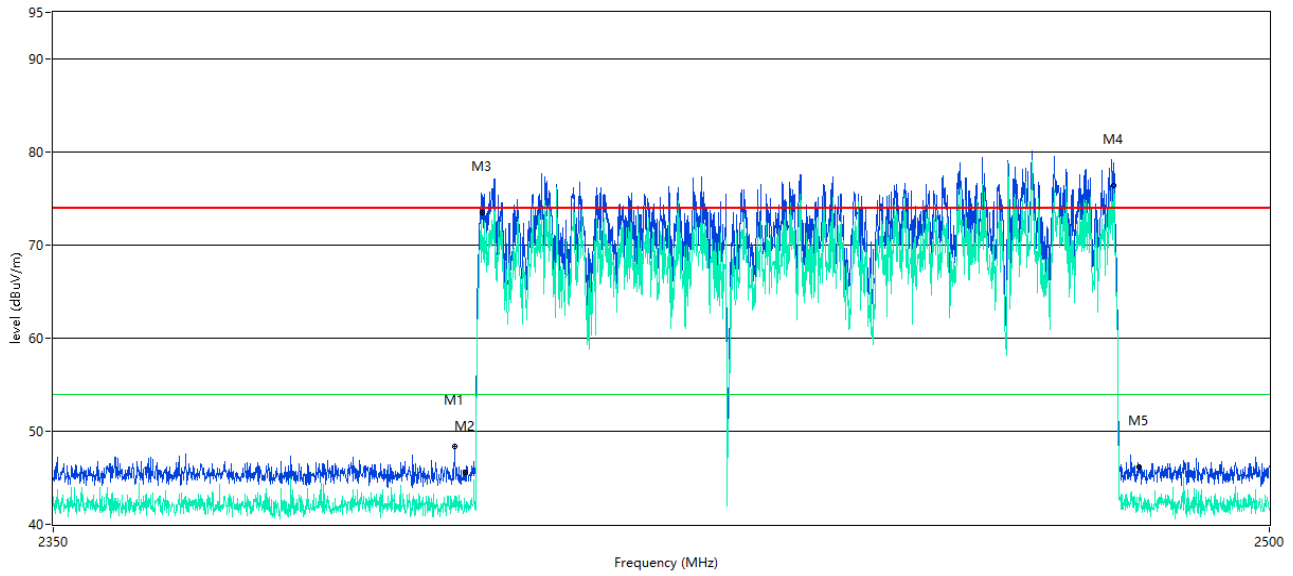

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
2398.475	48.40	--	43.1	35.93	74.0	--	54.0	10.90	171.20	100	Vertical	Pass
2400.000	45.41	--	41.9	35.93	74.0	--	54.0	12.10	256.20	100	Vertical	Pass
2402.000	73.48	--	69.8	35.95	74.0	--	54.0	-15.80	278.40	100	Vertical	N.A
2480.000	76.46	--	72.5	35.96	74.0	--	54.0	-18.50	344.60	100	Vertical	N.A
2483.500	46.16	--	42.9	35.93	74.0	--	54.0	11.10	108.41	100	Vertical	Pass

8-DPSK FREQUENCY BAND, ANT H

R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

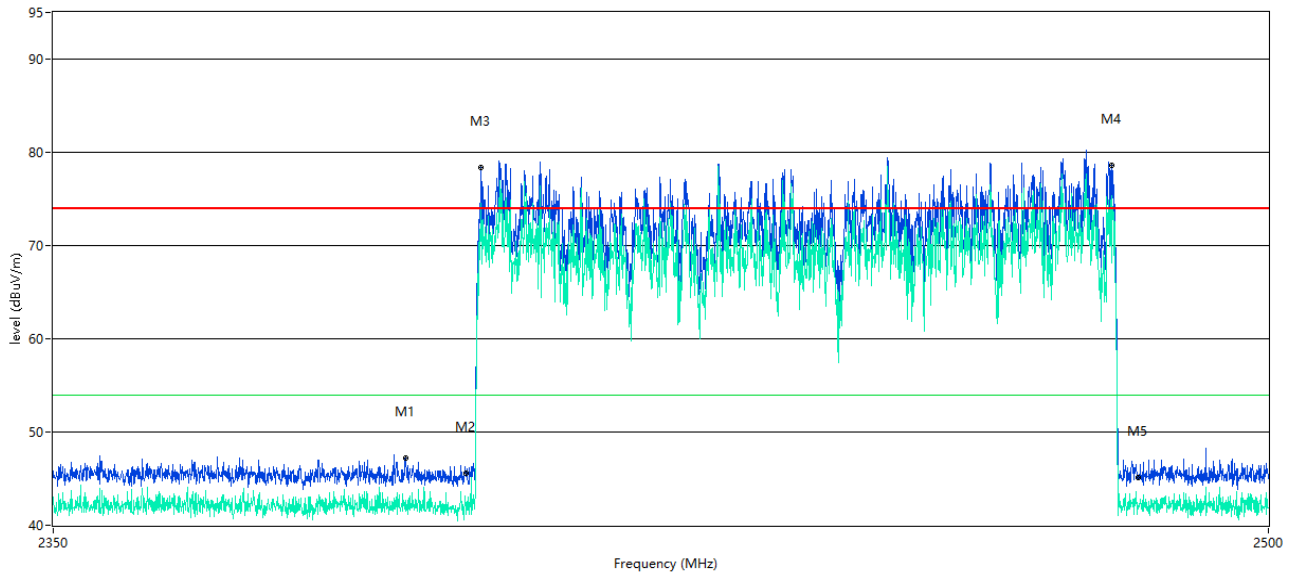

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
2392.527	47.16	--	41.5	36.03	74.0	--	54.0	12.50	239.00	100	Horizontal	Pass
2400.000	45.64	--	41.6	35.93	74.0	--	54.0	12.40	268.95	100	Horizontal	Pass
2401.775	78.33	--	74.6	35.95	74.0	--	54.0	-20.60	314.60	100	Horizontal	N.A
2480.155	78.62	--	75.3	35.96	74.0	--	54.0	-21.30	346.20	100	Horizontal	N.A
2483.500	45.08	--	41.8	35.93	74.0	--	54.0	12.20	102.50	100	Horizontal	Pass

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-EC1830163-AR.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-EC1830163-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-EC1830163-AI.PDF”.

--END OF REPORT--