

FCC CFR47 PART 22H, 24E, 27 CERTIFICATION TEST REPORT

FCC ID: 2AHZ5N8

Product: Smartphone

Trade Mark: CUBOT

Model Number: NOTE 8

Family Model: N/A

Report No.: S22041905602006

Prepared for

Shenzhen Huafurui Technology Co., Ltd
Unit 1401 14/F, Jin qi zhi gu mansion, Liu xian street, Xili, Nan shan district,
Shenzhen, China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street
Bao'an District, Shenzhen 518126 P.R. China
Tel. 400-800-6106, 0755-2320 0050, 0755-2320 0090
Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name	Shenzhen Huafurui Technology Co., Ltd
Address	Unit 1401 14/F, Jin qi zhi gu mansion, Liu xian street, Xili, Nan shan district, Shenzhen, China
Manufacturer's Name	Shenzhen Huafurui Technology Co., Ltd
Address	Unit 1401 14/F, Jin qi zhi gu mansion, Liu xian street, Xili, Nan shan district, Shenzhen, China
Product name	Smartphone
Model and/or type reference ..	NOTE 8
Family Model:	N/A
Standards	FCC CFR 47 Part 22H, Part 24E, Part 27
Test procedure	ANSI C63.26:2015 ANSI/TIA-603-E-2016

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personal only, and shall be noted in the revision of the document.

Date of Test	
Date (s) of performance of tests	Apr 23, 2022 ~ May 26, 2022
Date of Issue	May 27, 2022
Test Result	Pass

Testing Engineer :

Allen Liu

(Allen Liu)

Authorized Signatory :

Alex Li

(Alex Li)

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	5
1.1 PRODUCT DESCRIPTION	5
1.2 RELATED SUBMITTAL(S) / GRANT (S)	6
1.3 TEST METHODOLOGY	6
1.4 TEST FACILITY	6
MEASUREMENT UNCERTAINTY	6
1.5 SPECIAL ACCESSORIES.....	7
1.6 WORST-CASE CONFIGURATION AND MODE.....	7
1.6 SUMMARY OF TEST RESULTS	7
2. SYSTEM TEST CONFIGURATION	9
2.1 EUT CONFIGURATION.....	9
2.2 EUT EXERCISE	9
2.3 CONFIGURATION OF EUT SYSTEM.....	9
2.4 TEST SETUP	10
3.TEST AND MEASUREMENT EQUIPMENT	11
4. OUTPUT POWER.....	13
4.1 OUTPUT POWER MEASUREMENT	13
6. BANDEDGE AND EMISSION MASK	16
7. OUT OF BAND EMISSIONS	17
7.1 MEASUREMENT METHOD	18
8. RADIATED MEASUREMENT	19
8.1. RADIATED POWER (ERP & EIRP).....	19
8.2 LTE BAND 2.....	20
8.3 LTE BAND 4.....	24
8.4 LTE BAND 5.....	28

8.5 LTE BAND 7	30
8.5 LTE BAND 12	32
8.6 LTE BAND 17	34
8.7 LTE BAND 66	36
9. SPURIOUS RADIATION EMISSION	40
9.1 LTE BAND 2.....	42
9.2 LTE BAND 4.....	44
9.3 LTE BAND 5.....	46
9.4 LTE BAND 7.....	48
9.5 LTE BAND 12	50
9.6 LTE BAND 17	52
9.6 LTE BAND 66	54
10. FREQUENCY STABILITY	56
10.1 LTE BAND 2	57
10.2 LTE BAND 4	59
10.3 LTE BAND 5	61
10.4 LTE BAND 7	63
10.5 LTE BAND 12	65
10.6 LTE BAND 17	67
10.7 LTE BAND 66	69
11. PEAK-TO-AVERAGE RATIO.....	71
11.1 Description of the PAR Measurement.....	71
11.2 Measuring Instruments	71
11.3 Test Procedures.....	71
11.4 Test Setup.....	71

1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	Smartphone
Trade Mark	CUBOT
Model Name	NOTE 8
Family Model	N/A
Model Difference	N/A
FCC ID:	2AHZ5N8
Frequency Bands:	U.S. Bands: ☒ LTE FDD Band 2, 4, 5, 7, 12, 17, 66
Frequency Range:	LTE FDD Band 2 Uplink: 1850MHz-1910MHz, Downlink: 1930MHz-1990MHz; LTE FDD Band 4 Uplink: 1710MHz-1755MHz, Downlink: 2110MHz-2155MHz; LTE FDD Band 5 Uplink: 824MHz-849MHz, Downlink: 869MHz-894MHz; LTE-FDD Band 7 Uplink: 2500MHz-2570MHz, Downlink: 2620MHz-2690MHz; LTE FDD Band 12 Uplink: 699MHz-716MHz, Downlink: 729MHz-746MHz; LTE FDD Band 17 Uplink: 704MHz-716MHz, Downlink: 734MHz-746MHz; LTE FDD Band 66 Uplink: 1710MHz-1780MHz, Downlink: 2110MHz-2200MHz;
Type of Modulation:	QPSK/16QAM
Power Class	Class 3
Antenna:	PIFA Antenna
Antenna gain:	Band 2: -0.2dBi, Band 4: -0.6dBi, Band 5: 1.5dBi, Band 7: 1.0dBi, Band 12: -1.8dBi, Band 17: -1.7dBi, Band 66: -0.4dBi
Adapter	Model: HJ-0501000E1-US Input: 100-240V~50/60Hz 0.2A Output: 5.0V---1.0A 5.0W
Battery	DC 3.8V, 3100mAh
Power supply	DC 3.8V from battery or DC 5V from Adapter.
Extreme Vol. Limits:	DC 3.4V to DC 4.2V (Nominal DC 3.8V) (Note 1)
HW Version	TE117_MAIN_PCB_V1.0
SW Version	CUBOT_NOTE 8_B073C_AM_V01

** Note1: The High Voltage 4.2V and Low Voltage 3.4V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.

1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AHZ5N8** filing to comply with the FCC Part 22H&24E &27.

1.3 TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI/TIA-603-E-2016, FCC CFR 47 Part 2, Part 22, Part 24, Part 27, ANSI C63.26:2015.

1.4 TEST FACILITY

The test site used to collect the radiated data is located at:

ShenZhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R.China.

The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.26:2015& ANSI C63.4: 2014.

FCC Registration No.:463705

IC Registration No.:9270A-1,

CNAS Registration No.:L5516

MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.5dB
2	Conducted Emission Test	$\pm 1.38\text{dB}$
3	RF power, conducted	$\pm 0.16\text{dB}$
4	Spurious emissions, conducted	$\pm 0.21\text{dB}$
5	All emissions, radiated(<1G)	$\pm 4.68\text{dB}$
6	All emissions, radiated(>1G)	$\pm 4.89\text{dB}$
7	Temperature	$\pm 0.5^\circ\text{C}$
8	Humidity	$\pm 2\%$
9	Frequency error, conducted	$\pm 0.19\text{ ppm}$

1.5 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

1.6 WORST-CASE CONFIGURATION AND MODE

The worst-case scenario for all measurements is based on the investigation results.

The device has LTE Bands of: Band 2, Band 4, Band 5, Band 7, Band 12, Band 17, Band 66

The RB Size was selected to measure for peak or average ERP and EIRP, which was based on the conducted power verification baseline data.

For the fundamental investigation of radiated emissions, the EUT is investigated for vertical and horizontal antenna orientations and X Y and Z orientations of the EUT alone. After the investigations the worst case was determined to be at X orientation for all LTE bands.

1.6 SUMMARY OF TEST RESULTS

FCC Part22, Subpart H/ FCC Part24, Subpart E, FCC Part27, Subpart L, Subpart M, Subpart H KDB 971168 D01 Power Meas License Digital Systems v03			
FCC Rule	Test Item	Verdict	Remark
2.1046	Conducted Output Power	PASS	
22.913(d) 24.232(d) 27.50(d)(5) KDB 971168 D01 Clause 5.7	Peak-to-Average Ratio	PASS	
2.1049 22.917(b) 24.238(b) KDB 971168 D01 Clause 4.2	Occupied Bandwidth	PASS	
2.1051 22.917(a) 24.238(a) 27.53(m), (g), (h) KDB 971168 D01 Clause 6	Band Edge	PASS	
22.913(a)(2) 27.50(c)(10) KDB 971168 D01 Clause 5.6	Effective Radiated Power	PASS	

24.232(c) 27.50(h)(2), (d)(4) KDB 971168 D01 Clause 5.6	Equivalent Isotropic Radiated Power	PASS	
2.1053 22.917(a) 24.238(a) 27.53(g)(h)(m) KDB 971168 D01 Clause 7	Field Strength of Spurious Radiation	PASS	
2.1055 22.355 24.235 27.54 KDB 971168 D01 Clause 9	Frequency Stability for Temperature & Voltage	PASS	
2.1051 22.917(a) 24.238(a) 27.53(g)(h)(m) KDB 971168 D01 Clause 6	Conducted Emission	PASS	
Remark: 1. "N/A" denotes test is not applicable in this Test Report. 2. All test items were verified and recorded according to the standards and without any deviation during the test. 3. No modifications are made to the EUT during all test items.			

2. SYSTEM TEST CONFIGURATION

2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

2.3 CONFIGURATION OF EUT SYSTEM

Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	Smartphone	NOTE 8	FCC ID: 2AHZ5N8	EUT


*Note: All the accessories have been used during the test.
the following "EUT" in setup diagram means EUT system.*

2.4 TEST SETUP


For Radiated Test Cases




For Conducted Output Power

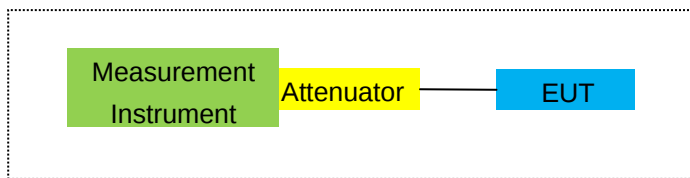

For Peak-to Average Ratio, Occupied Bandwidth, Conducted Band edge and Conducted Spurious Emission

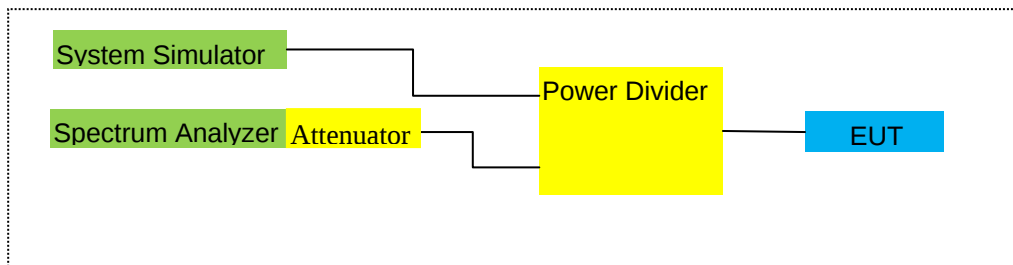

For Frequency Stability

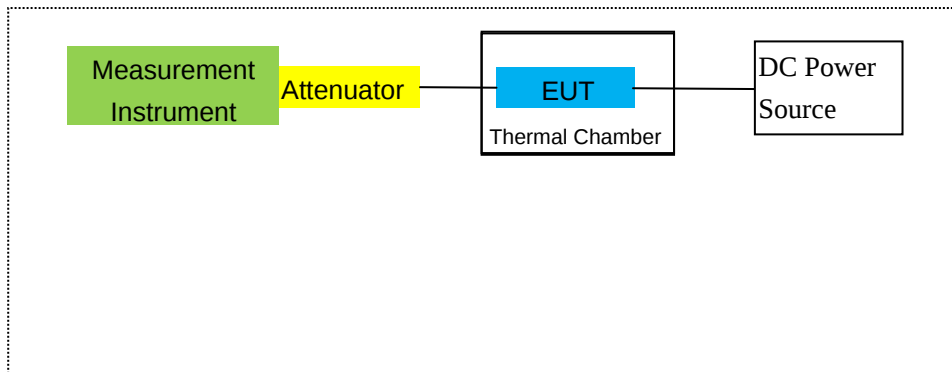

Note: EUT built-in battery-powered, the battery is fully-charged.

3.TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	MXA Signal Analyzer	Agilent	N9020A	MY49100060	2021.07.01	2022.06.30	1 year
2	Test Receiver	R&S	ESPI	101318	2022.04.06	2023.04.05	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2022.03.30	2023.03.29	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2020.05.11	2023.05.10	3 year
5	Horn Antenna	EM	EM-AH-10180	2011071402	2022.03.31	2023.03.30	1 year
6	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2021.11.07	2022.11.06	1 year
7	Amplifier	EM	EM-30180	060538	2021.07.01	2022.06.30	1 year
8	Loop Antenna	ARA	PLA-1030/B	1029	2022.04.06	2023.04.05	1 year
9	Power Meter	R&S	NRVS	100696	2021.07.01	2022.06.30	1 year
10	Power Sensor	R&S	URV5-Z4	0395.1619.05	2022.04.06	2023.04.05	1 year
11	Test Cable	N/A	R-01	N/A	2019.08.06	2022.08.05	3 year
12	Test Cable	N/A	R-02	N/A	2019.08.06	2022.08.05	3 year
13	Test Cable	N/A	R-03	N/A	2019.06.28	2022.06.27	3 year
14	Test Receiver	R&S	ESCI	101160	2022.04.06	2023.04.05	1 year
15	LISN	R&S	ENV216	101313	2022.04.06	2023.04.05	1 year
16	LISN	EMCO	3816/2	00042990	2022.04.06	2023.04.05	1 year
17	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2022.04.06	2023.04.05	1 year
18	Passive Voltage Probe	R&S	ESH2-Z3	100196	2022.04.06	2023.04.05	1 year
19	Test Cable	N/A	C01	N/A	2020.05.11	2023.05.10	3 year
20	Test Cable	N/A	C02	N/A	2020.05.11	2023.05.10	3 year
21	Test Cable	N/A	C03	N/A	2020.05.11	2023.05.10	3 year
22	Attenuator	MCE	24-10-34	BN9258	2020.04.07	2023.04.06	1 year
23	Spectrum Analyzer	agilent	e4440a	us44300399	2022.04.06	2023.04.05	1 year
24	test receiver	R&S	ESCI	a0304218	2022.04.06	2023.04.05	1 year
25	Communication Tester	R&S	CMU200	A0304247	2022.04.06	2023.04.05	1 year
26	Thermal Chamber	Ten Billion	TTC-B3C	TBN-960502	2022.04.06	2023.04.05	1 year

27	DC Power Source	N/A	PS-6005D	2017040292 3	2020.05.11	2023.05.10	3 year
28	PSG Analog Signal Generator	Agilent	E8257D	MY51110112	2021.07.01	2022.06.30	1 year
29	Communication Tester	R&S	CMW500	148500	2021.07.01	2022.06.30	1 year
30	PSG Analog Signal Generator	Agilent	E8257D	MY51110112	2021.07.01	2022.06.30	1 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable& DC Power Source which is scheduled for calibration every 3 years.

4. OUTPUT POWER

4.1 OUTPUT POWER MEASUREMENT

LTE Measurement Procedure:

All LTE bands conducted power peak and average are obtained from the CMW500 telecommunication test set. The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".3

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3 6.6.3.3.2	13	10	Table 6.2.4-2	Table 6.2.4-2
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

Test data reference attachment.

5. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

MODES TESTED

- ☐ LTE Band2
- LTE Band 4
- LTE Band 5
- LTE Band 7
- LTE Band 12
- LTE Band 17
- LTE Band 66

RESULTS

PASS

Test data reference attachment.

6. BANDEDGE AND EMISSION MASK

RULE PART(S)

FCC: §2.1051, §22.917(a), §24.238(a), §27.53(c)(g)(h)(m)

FCC: §2.1046, §22.913, §24.232

LIMITS

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P[\text{Watts}])$, where P is the transmitter power in Watts.

The minimum permissible attenuation level for Band 7 is as following.

Per 27.53(g) for operations in the 698-746 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

Per 27.53(c.5) for operations in the 776-788 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

For all plots showing emissions in the 763 – 775MHz and 793 – 805MHz band, the FCC limit per 27.53(c.4) is $65 + 10\log_{10}(P) = -35\text{dBm}$ in a 6.25kHz bandwidth.

Per 27.53(m) for operations in the BRS/EBS bands, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth.

TEST PROCEDURE

The transmitter output was connected to a CMW500Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

For each band edge measurement:

Set the spectrum analyzer span to include the block edge frequency

Set a marker to point the corresponding band edge frequency in each test case.

Set display line

Set resolution bandwidth to at least 1% of emission bandwidth.

MODES TESTED

- ☐ LTE Band 2/4/5/7/12/17/66

RESULTS

Test data reference attachment.

7. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.917(a), §24.238(a), §27.53(c)(g)(h)(m)

LIMITS

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P[\text{Watts}])$, where P is the transmitter power in Watts.

The minimum permissible attenuation level for Band 7 is as following.

Per 27.53(g) for operations in the 698-746 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

Per 27.53(c.5) for operations in the 776-788 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

For all plots showing emissions in the 763 – 775MHz and 793 – 805MHz band, the FCC limit per 27.53(c.4) is $65 + 10\log_{10}(P) = -35\text{dBm}$ in a 6.25kHz bandwidth.

Per 27.53(m) for operations in the BRS/EBS bands, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth.

TEST PROCEDURE

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

For each out of band emissions measurement:

- ☐ Set display line
- ☐ Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz.

MODES TESTED

- ☐ LTE Band2
- LTE Band 4
- LTE Band 5
- LTE Band 7
- LTE Band 12
- LTE Band 17
- LTE Band 66

7.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

Test data reference attachment.

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported (LTE Band 2/4/7: above 10GHz).

8. RADIATED MEASUREMENT

8.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913(a)(2), §24.232(c) and §27.50 (h)(2), (b)(10), (c)(10), (d)(4)

LIMITS:

22.913(a) (2)- The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.
24.232 (c) Mobile and portable stations are limited to 2 watts EIRP.
27.50 (c) (10) the following power and antenna height requirements apply to stations transmitting in the 698–746 MHz band, the portable stations (hand-held devices) are limited to 3 watts ERP.
27.50 (b)(10) Portable stations (hand-held devices) transmitting in the 746–757 MHz, 758–763 MHz, 776–793 MHz, and 805–806 MHz bands are limited to 3 watts ERP.
27.50 (d)(4) The following power and antenna height requirements apply to stations transmitting in the 1710–1755 MHz and 2110–2155 MHz bands: Fixed, mobile, and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP.
27.50 (h)(2) Mobile and other user stations in the 2500–2570 MHz and 2620–2690 MHz bands. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

TEST PROCEDURE

ANSI/TIA-603-E Clause 2.2.17

KDB 971168 v02r01 RF power output using broadband peak and average power meter method.

KDB 971168 D01 Power Meas License Digital Systems v02r01, “Measurement Guidance for Certification of Licensed Digital Transmitters”

MODES TESTED

- ☐ LTE Band2
- LTE Band 4
- LTE Band 5
- LTE Band 7
- LTE Band 12
- LTE Band 17
- LTE Band 66

RESULTS

Pass

8.2 LTE BAND 2

Radiated Power (EIRP) for Band 2									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Factor Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP	Polarization Of Max. ERP	
							Average		
							(mW)		
1.4MHz Band QPSK	1/#Mid	1850.7	-2.22	3.76	28.24	22.26	168.267	Horizontal	Pass
		1880	-2.03	3.91	28.22	22.28	169.044	Horizontal	Pass
		1909.3	-1.94	3.93	28.20	22.33	171.002	Horizontal	Pass
3.0MHz Band QPSK	1/#Mid	1851.5	-2.28	3.77	28.23	22.18	165.196	Horizontal	Pass
		1880	-2.13	3.91	28.24	22.20	165.959	Horizontal	Pass
		1908.5	-2.00	3.94	28.25	22.31	170.216	Horizontal	Pass
5.0MHz Band QPSK	1/#Mid	1852.5	-2.17	3.77	28.31	22.37	172.584	Horizontal	Pass
		1880	-1.79	3.91	28.22	22.52	178.649	Horizontal	Pass
		1907.5	-1.72	3.94	28.20	22.54	179.473	Horizontal	Pass
10.0MHz Band QPSK	1/#Mid	1855	-2.03	3.79	28.33	22.51	178.238	Horizontal	Pass
		1880	-1.73	3.95	28.22	22.54	179.473	Horizontal	Pass
		1905	-1.62	3.97	28.19	22.60	181.970	Horizontal	Pass
15.0MHz Band QPSK	1/#Mid	1857.5	-1.99	3.79	28.34	22.56	180.302	Horizontal	Pass
		1880	-1.78	3.95	28.22	22.49	177.419	Horizontal	Pass
		1902.5	-1.64	3.97	28.18	22.57	180.717	Horizontal	Pass
20.0MHz Band QPSK	1/#Mid	1860	-1.98	3.81	28.35	22.56	180.302	Horizontal	Pass
		1880	-1.65	3.96	28.22	22.61	182.390	Horizontal	Pass
		1900	-1.59	4.00	28.16	22.57	180.717	Horizontal	Pass
1.4MHz Band QPSK	1/#Mid	1850.7	-3.36	3.76	28.24	21.12	129.420	Vertical	Pass
		1880	-3.02	3.91	28.22	21.29	134.586	Vertical	Pass
		1909.3	-2.30	3.93	28.20	21.97	157.398	Vertical	Pass
3.0MHz Band QPSK	1/#Mid	1851.5	-2.90	3.77	28.23	21.56	143.219	Vertical	Pass
		1880	-2.74	3.91	28.24	21.59	144.212	Vertical	Pass
		1908.5	-2.73	3.94	28.25	21.58	143.880	Vertical	Pass
5.0MHz Band QPSK	1/#Mid	1852.5	-3.37	3.77	28.31	21.17	130.918	Vertical	Pass
		1880	-3.30	3.91	28.22	21.01	126.183	Vertical	Pass
		1907.5	-2.47	3.94	28.20	21.79	151.008	Vertical	Pass
10.0MHz Band QPSK	1/#Mid	1855	-3.14	3.79	28.33	21.40	138.038	Vertical	Pass
		1880	-2.52	3.95	28.22	21.75	149.624	Vertical	Pass
		1905	-2.49	3.97	28.19	21.73	148.936	Vertical	Pass
15.0MHz	1/#Mid	1857.5	-3.50	3.79	28.34	21.05	127.350	Vertical	Pass

Band QPSK		1880	-2.80	3.95	28.22	21.47	140.281	Vertical	Pass
		1902.5	-2.89	3.97	28.18	21.32	135.519	Vertical	Pass
20.0MHz Band QPSK	1/#Mid	1860	-2.90	3.81	28.35	21.64	145.881	Vertical	Pass
		1880	-3.08	3.96	28.22	21.18	131.220	Vertical	Pass
		1900	-2.53	4.00	28.16	21.63	145.546	Vertical	Pass

Radiated Power (EIRP) for Band 2									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Factor Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP	Polarization Of Max. ERP	
							Average		
							(mW)		
1.4MHz Band 16 QAM	1/#Mid	1850.7	-2.12	3.76	28.24	22.36	172.187	Horizontal	Pass
		1880	-1.59	3.91	28.22	22.72	187.068	Horizontal	Pass
		1909.3	-1.52	3.93	28.20	22.75	188.365	Horizontal	Pass
3.0MHz Band 16 QAM	1/#Mid	1851.5	-1.62	3.77	28.23	22.84	192.309	Horizontal	Pass
		1880	-1.70	3.91	28.24	22.63	183.231	Horizontal	Pass
		1908.5	-1.91	3.94	28.25	22.40	173.780	Horizontal	Pass
5.0MHz Band 16 QAM	1/#Mid	1852.5	-1.56	3.77	28.31	22.98	198.609	Horizontal	Pass
		1880	-1.47	3.91	28.22	22.84	192.309	Horizontal	Pass
		1907.5	-1.15	3.94	28.20	23.11	204.644	Horizontal	Pass
10.0MHz Band 16 QAM	1/#Mid	1855	-1.61	3.79	28.33	22.93	196.336	Horizontal	Pass
		1880	-1.60	3.95	28.22	22.67	184.927	Horizontal	Pass
		1905	-1.07	3.97	28.19	23.15	206.538	Horizontal	Pass
15.0MHz Band 16 QAM	1/#Mid	1857.5	-1.59	3.79	28.34	22.96	197.697	Horizontal	Pass
		1880	-1.38	3.95	28.22	22.89	194.536	Horizontal	Pass
		1902.5	-1.34	3.97	28.18	22.87	193.642	Horizontal	Pass
20.0MHz Band 16 QAM	1/#Mid	1860	-1.48	3.81	28.35	23.06	202.302	Horizontal	Pass
		1880	-1.18	3.96	28.22	23.08	203.236	Horizontal	Pass
		1900	-1.00	4.00	28.16	23.16	207.014	Horizontal	Pass
1.4MHz Band 16 QAM	1/#Mid	1850.7	-3.05	3.76	28.24	21.43	138.995	Vertical	Pass
		1880	-2.64	3.91	28.22	21.67	146.893	Vertical	Pass
		1909.3	-2.69	3.93	28.20	21.58	143.880	Vertical	Pass
3.0MHz Band 16 QAM	1/#Mid	1851.5	-3.09	3.77	28.23	21.37	137.088	Vertical	Pass
		1880	-2.82	3.91	28.24	21.51	141.579	Vertical	Pass
		1908.5	-2.92	3.94	28.25	21.39	137.721	Vertical	Pass
5.0MHz Band 16 QAM	1/#Mid	1852.5	-2.68	3.77	28.31	21.86	153.462	Vertical	Pass
		1880	-2.48	3.91	28.22	21.83	152.405	Vertical	Pass
		1907.5	-2.32	3.94	28.20	21.94	156.315	Vertical	Pass
10.0MHz Band 16 QAM	1/#Mid	1855	-3.02	3.79	28.33	21.52	141.906	Vertical	Pass
		1880	-2.72	3.95	28.22	21.55	142.889	Vertical	Pass
		1905	-2.94	3.97	28.19	21.28	134.276	Vertical	Pass
15.0MHz Band 16 QAM	1/#Mid	1857.5	-3.13	3.79	28.34	21.42	138.676	Vertical	Pass
		1880	-2.38	3.95	28.22	21.89	154.525	Vertical	Pass
		1902.5	-2.66	3.97	28.18	21.55	142.889	Vertical	Pass

20.0MHz	1/#Mid	1860	-2.41	3.81	28.35	22.13	163.305	Vertical	Pass
Band 16		1880	-2.78	3.96	28.22	21.48	140.605	Vertical	Pass
QAM		1900	-2.18	4.00	28.16	21.98	157.761	Vertical	Pass

8.3 LTE BAND 4

Radiated Power (EIRP) for Band 4									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level	Cable Loss	Factor Gain	Max. EIRP	Max. EIRP	Polarization Of	
			(dBm)	(dBm)	(dB)	Average	Average	Max. ERP	
						(dBm)	(mW)		
1.4MHz Band QPSK	1/#Mid	1710.7	-1.71	3.12	27.58	22.75	188.365	Horizontal	Pass
		1732.5	-1.70	3.27	27.61	22.64	183.654	Horizontal	Pass
		1754.3	-1.68	3.29	27.63	22.66	184.502	Horizontal	Pass
3.0MHz Band QPSK	1/#Mid	1711.5	-1.88	3.13	27.61	22.60	181.970	Horizontal	Pass
		1732.5	-1.80	3.27	27.61	22.54	179.473	Horizontal	Pass
		1753.5	-1.72	3.30	27.62	22.60	181.970	Horizontal	Pass
5.0MHz Band QPSK	1/#Mid	1712.5	-1.65	3.13	27.63	22.85	192.752	Horizontal	Pass
		1732.5	-1.55	3.27	27.61	22.79	190.108	Horizontal	Pass
		1752.5	-1.43	3.30	27.60	22.87	193.642	Horizontal	Pass
10.0MHz Band QPSK	1/#Mid	1715	-1.59	3.15	27.64	22.90	194.984	Horizontal	Pass
		1732.5	-1.36	3.31	27.61	22.94	196.789	Horizontal	Pass
		1750	-1.38	3.33	27.59	22.88	194.089	Horizontal	Pass
15.0MHz Band QPSK	1/#Mid	1717.5	-1.60	3.15	27.65	22.90	194.984	Horizontal	Pass
		1732.5	-1.44	3.31	27.61	22.86	193.197	Horizontal	Pass
		1747.5	-1.38	3.33	27.57	22.86	193.197	Horizontal	Pass
20.0MHz Band QPSK	1/#Mid	1720	-1.54	3.17	27.66	22.95	197.242	Horizontal	Pass
		1732.5	-1.37	3.32	27.61	22.92	195.884	Horizontal	Pass
		1745	-1.31	3.36	27.56	22.89	194.536	Horizontal	Pass
1.4MHz Band QPSK	1/#Mid	1710.7	-2.30	3.12	27.58	22.16	164.437	Vertical	Pass
		1732.5	-2.49	3.27	27.61	21.85	153.109	Vertical	Pass
		1754.3	-2.44	3.29	27.63	21.90	154.882	Vertical	Pass
3.0MHz Band QPSK	1/#Mid	1711.5	-3.06	3.13	27.61	21.42	138.676	Vertical	Pass
		1732.5	-2.89	3.27	27.61	21.45	139.637	Vertical	Pass
		1753.5	-2.90	3.30	27.62	21.42	138.676	Vertical	Pass
5.0MHz Band QPSK	1/#Mid	1712.5	-3.00	3.13	27.63	21.50	141.254	Vertical	Pass
		1732.5	-2.56	3.27	27.61	21.78	150.661	Vertical	Pass
		1752.5	-2.74	3.30	27.60	21.56	143.219	Vertical	Pass
10.0MHz Band QPSK	1/#Mid	1715	-2.40	3.15	27.64	22.09	161.808	Vertical	Pass
		1732.5	-2.15	3.31	27.61	22.15	164.059	Vertical	Pass
		1750	-2.84	3.33	27.59	21.42	138.676	Vertical	Pass

15.0MHz Band QPSK	1/#Mid	1717.5	-2.53	3.15	27.65	21.97	157.398	Vertical	Pass
		1732.5	-2.26	3.31	27.61	22.04	159.956	Vertical	Pass
		1747.5	-1.88	3.33	27.57	22.36	172.187	Vertical	Pass
20.0MHz Band QPSK	1/#Mid	1720	-2.22	3.17	27.66	22.27	168.655	Vertical	Pass
		1732.5	-2.34	3.32	27.61	21.95	156.675	Vertical	Pass
		1745	-2.22	3.36	27.56	21.98	157.761	Vertical	Pass

Radiated Power (EIRP) for Band 4									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level	Cable	Factor	Max. EIRP	Max. EIRP	Polarization	
			(dBm)	Loss	Gain	Average	Average	Of Max. ERP	
				(dBm)	(dB)	(dBm)	(mW)		
1.4MHz	1##Mid	1710.7	-2.22	3.12	27.58	22.24	167.494	Horizontal	Pass
Band 16		1732.5	-2.07	3.27	27.61	22.27	168.655	Horizontal	Pass
QAM		1754.3	-2.07	3.29	27.63	22.27	168.655	Horizontal	Pass
3.0MHz	1##Mid	1711.5	-2.16	3.13	27.61	22.32	170.608	Horizontal	Pass
Band 16		1732.5	-2.29	3.27	27.61	22.05	160.325	Horizontal	Pass
QAM		1753.5	-2.51	3.30	27.62	21.81	151.705	Horizontal	Pass
5.0MHz	1##Mid	1712.5	-1.99	3.13	27.63	22.51	178.238	Horizontal	Pass
Band 16		1732.5	-1.95	3.27	27.61	22.39	173.380	Horizontal	Pass
QAM		1752.5	-1.64	3.30	27.60	22.66	184.502	Horizontal	Pass
10.0MHz	1##Mid	1715	-2.06	3.15	27.64	22.43	174.985	Horizontal	Pass
Band 16		1732.5	-2.25	3.31	27.61	22.05	160.325	Horizontal	Pass
QAM		1750	-1.63	3.33	27.59	22.63	183.231	Horizontal	Pass
15.0MHz	1##Mid	1717.5	-1.86	3.15	27.65	22.64	183.654	Horizontal	Pass
Band 16		1732.5	-1.92	3.31	27.61	22.38	172.982	Horizontal	Pass
QAM		1747.5	-1.94	3.33	27.57	22.30	169.824	Horizontal	Pass
20.0MHz	1##Mid	1720	-1.81	3.17	27.66	22.68	185.353	Horizontal	Pass
Band 16		1732.5	-1.82	3.32	27.61	22.47	176.604	Horizontal	Pass
QAM		1745	-1.63	3.36	27.56	22.57	180.717	Horizontal	Pass
1.4MHz	1##Mid	1710.7	-3.59	3.12	27.58	20.87	122.180	Vertical	Pass
Band 16		1732.5	-3.56	3.27	27.61	20.78	119.674	Vertical	Pass
QAM		1754.3	-3.51	3.29	27.63	20.83	121.060	Vertical	Pass
3.0MHz	1##Mid	1711.5	-2.98	3.13	27.61	21.50	141.254	Vertical	Pass
Band 16		1732.5	-2.70	3.27	27.61	21.64	145.881	Vertical	Pass
QAM		1753.5	-3.22	3.30	27.62	21.10	128.825	Vertical	Pass
5.0MHz	1##Mid	1712.5	-3.56	3.13	27.63	20.94	124.165	Vertical	Pass
Band 16		1732.5	-3.57	3.27	27.61	20.77	119.399	Vertical	Pass
QAM		1752.5	-3.38	3.30	27.60	20.92	123.595	Vertical	Pass
10.0MHz	1##Mid	1715	-3.64	3.15	27.64	20.85	121.619	Vertical	Pass
Band 16		1732.5	-2.63	3.31	27.61	21.67	146.893	Vertical	Pass
QAM		1750	-2.89	3.33	27.59	21.37	137.088	Vertical	Pass
15.0MHz	1##Mid	1717.5	-3.07	3.15	27.65	21.43	138.995	Vertical	Pass
Band 16		1732.5	-2.77	3.31	27.61	21.53	142.233	Vertical	Pass
QAM		1747.5	-2.62	3.33	27.57	21.62	145.211	Vertical	Pass

20.0MHz	1/#Mid	1720	-3.44	3.17	27.66	21.05	127.350	Vertical	Pass
Band 16		1732.5	-3.33	3.32	27.61	20.96	124.738	Vertical	Pass
QAM		1745	-2.70	3.36	27.56	21.50	141.254	Vertical	Pass

8.4 LTE BAND 5

Radiated Power (ERP) for Band 5										
Mode	RB/RB SIZE	Frequency	Result							Conclusion
			SG	Cable	Factor	Correction	Max.	Max.	Polarization	
			Level	Loss	Gain		ERP	ERP	Of Max. ERP	
			(dBm)	(dBm)	(dB)		Average	Average		
						(dB)	(dBm)	(mW)		
1.4MHz	Band QPSK	824.7	7.14	2.01	19.68	2.15	22.66	184.502	Horizontal	Pass
		836.5	7.02	2.01	19.77	2.15	22.63	183.231	Horizontal	Pass
		848.3	6.82	2.02	19.82	2.15	22.47	176.604	Horizontal	Pass
3.0MHz	Band QPSK	825.5	6.91	2.01	19.70	2.15	22.45	175.792	Horizontal	Pass
		836.5	6.81	2.01	19.77	2.15	22.42	174.582	Horizontal	Pass
		847.5	6.68	2.02	19.81	2.15	22.32	170.608	Horizontal	Pass
5.0MHz	Band QPSK	826.5	7.19	2.01	19.71	2.15	22.74	187.932	Horizontal	Pass
		836.5	7.07	2.01	19.77	2.15	22.68	185.353	Horizontal	Pass
		846.5	6.91	2.02	19.79	2.15	22.53	179.061	Horizontal	Pass
10.0MHz	Band QPSK	829	7.21	2.01	19.73	2.15	22.78	189.671	Horizontal	Pass
		836.5	7.16	2.01	19.77	2.15	22.77	189.234	Horizontal	Pass
		844	7.06	2.02	19.78	2.15	22.67	184.927	Horizontal	Pass
1.4MHz	Band QPSK	824.7	6.27	2.01	19.68	2.15	21.79	151.008	Vertical	Pass
		836.5	5.79	2.01	19.77	2.15	21.40	138.038	Vertical	Pass
		848.3	5.49	2.02	19.82	2.15	21.14	130.017	Vertical	Pass
3.0MHz	Band QPSK	825.5	5.89	2.01	19.70	2.15	21.43	138.995	Vertical	Pass
		836.5	5.50	2.01	19.77	2.15	21.11	129.122	Vertical	Pass
		847.5	5.53	2.02	19.81	2.15	21.17	130.918	Vertical	Pass
5.0MHz	Band QPSK	826.5	5.54	2.01	19.71	2.15	21.09	128.529	Vertical	Pass
		836.5	5.45	2.01	19.77	2.15	21.06	127.644	Vertical	Pass
		846.5	5.78	2.02	19.79	2.15	21.40	138.038	Vertical	Pass
10.0MHz	Band QPSK	829	6.06	2.01	19.73	2.15	21.63	145.546	Vertical	Pass
		836.5	6.07	2.01	19.77	2.15	21.68	147.231	Vertical	Pass
		844	6.15	2.02	19.78	2.15	21.76	149.968	Vertical	Pass

Radiated Power (ERP) for Band 5										
Mode	RB/RB SIZE	Frequency	Result							Conclusion
			SG Level	Cable Loss	Factor Gain	Correction	Max. ERP	Max. ERP	Polarization	
			(dBm)	(dBm)	(dB)	(dB)	Average	Average	Of Max. ERP	
							(dBm)	(mW)		
1.4MHz	3/#Mid	824.7	6.29	2.01	19.68	2.15	21.81	151.705	Horizontal	Pass
Band 16		836.5	6.22	2.01	19.77	2.15	21.83	152.405	Horizontal	Pass
QAM		848.3	6.06	2.02	19.82	2.15	21.71	148.252	Horizontal	Pass
3.0MHz	1/#Mid	825.5	6.37	2.01	19.70	2.15	21.91	155.239	Horizontal	Pass
Band 16		836.5	6.08	2.01	19.77	2.15	21.69	147.571	Horizontal	Pass
QAM		847.5	5.56	2.02	19.81	2.15	21.20	131.826	Horizontal	Pass
5.0MHz	1/#Mid	826.5	6.69	2.01	19.71	2.15	22.24	167.494	Horizontal	Pass
Band 16		836.5	6.46	2.01	19.77	2.15	22.07	161.065	Horizontal	Pass
QAM		846.5	6.21	2.02	19.79	2.15	21.83	152.405	Horizontal	Pass
10.0MHz	1/#Mid	829	6.69	2.01	19.73	2.15	22.26	168.267	Horizontal	Pass
Band 16		836.5	6.41	2.01	19.77	2.15	22.02	159.221	Horizontal	Pass
QAM		844	5.95	2.02	19.78	2.15	21.56	143.219	Horizontal	Pass
1.4MHz	1/#Mid	824.7	5.49	2.01	19.68	2.15	21.01	126.183	Vertical	Pass
Band 16		836.5	5.58	2.01	19.77	2.15	21.19	131.522	Vertical	Pass
QAM		848.3	4.60	2.02	19.82	2.15	20.25	105.925	Vertical	Pass
3.0MHz	1/#Mid	825.5	6.40	2.01	19.70	2.15	21.94	156.315	Vertical	Pass
Band 16		836.5	4.92	2.01	19.77	2.15	20.53	112.980	Vertical	Pass
QAM		847.5	6.30	2.02	19.81	2.15	21.94	156.315	Vertical	Pass
5.0MHz	1/#Mid	826.5	5.85	2.01	19.71	2.15	21.40	138.038	Vertical	Pass
Band 16		836.5	4.76	2.01	19.77	2.15	20.37	108.893	Vertical	Pass
QAM		846.5	4.78	2.02	19.79	2.15	20.40	109.648	Vertical	Pass
10.0MHz	1/#Mid	829	4.80	2.01	19.73	2.15	20.37	108.893	Vertical	Pass
Band 16		836.5	5.14	2.01	19.77	2.15	20.75	118.850	Vertical	Pass
QAM		844	5.33	2.02	19.78	2.15	20.94	124.165	Vertical	Pass

8.5 LTE BAND 7

Radiated Power (EIRP) for Band 7									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level	Cable Loss	Factor Gain	Max. EIRP	Max. EIRP	Polarization Of	
			(dBm)	(dBm)	(dB)	Average	Average	Max. ERP	
						(dBm)	(mW)		
5.0MHz Band QPSK	1/#Mid	2502.5	-0.39	4.54	27.75	22.82	191.426	Horizontal	Pass
		2535	-0.22	4.69	27.72	22.81	190.985	Horizontal	Pass
		2567.5	-0.15	4.71	27.71	22.85	192.752	Horizontal	Pass
10.0MHz Band QPSK	1/#Mid	2505	-0.32	4.55	27.76	22.89	194.536	Horizontal	Pass
		2535	-0.13	4.69	27.72	22.90	194.984	Horizontal	Pass
		2565	-0.05	4.72	27.70	22.93	196.336	Horizontal	Pass
15.0MHz Band QPSK	1/#Mid	2507.5	-0.33	4.55	27.77	22.89	194.536	Horizontal	Pass
		2535	-0.19	4.69	27.72	22.84	192.309	Horizontal	Pass
		2562.5	-0.09	4.72	27.69	22.88	194.089	Horizontal	Pass
20.0MHz Band QPSK	1/#Mid	2510	-0.27	4.57	27.78	22.94	196.789	Horizontal	Pass
		2535	-0.09	4.73	27.72	22.90	194.984	Horizontal	Pass
		2560	-0.05	4.75	27.68	22.88	194.089	Horizontal	Pass
5.0MHz Band QPSK	1/#Mid	2502.5	-1.93	4.54	27.75	21.28	134.276	Vertical	Pass
		2535	-1.78	4.69	27.72	21.25	133.352	Vertical	Pass
		2567.5	-1.32	4.71	27.71	21.68	147.231	Vertical	Pass
10.0MHz Band QPSK	1/#Mid	2505	-1.55	4.55	27.76	21.66	146.555	Vertical	Pass
		2535	-1.41	4.69	27.72	21.62	145.211	Vertical	Pass
		2565	-1.59	4.72	27.70	21.39	137.721	Vertical	Pass
15.0MHz Band QPSK	1/#Mid	2507.5	-2.12	4.55	27.77	21.10	128.825	Vertical	Pass
		2535	-1.94	4.69	27.72	21.09	128.529	Vertical	Pass
		2562.5	-1.07	4.72	27.69	21.90	154.882	Vertical	Pass
20.0MHz Band QPSK	1/#Mid	2510	-1.89	4.57	27.78	21.32	135.519	Vertical	Pass
		2535	-1.39	4.73	27.72	21.60	144.544	Vertical	Pass
		2560	-1.55	4.75	27.68	21.38	137.404	Vertical	Pass

Radiated Power (EIRP) for Band 7									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level	Cable	Factor	Max. EIRP	Max. EIRP	Polarization	
			(dBm)	Loss	Gain	Average	Average	Of Max. ERP	
				(dBm)	(dB)	(dBm)	(mW)		
5.0MHz Band 16 QAM	1##Mid	2502.5	-1.08	4.54	27.75	22.13	163.305	Horizontal	Pass
		2535	-0.77	4.69	27.72	22.26	168.267	Horizontal	Pass
		2567.5	-0.85	4.71	27.71	22.15	164.059	Horizontal	Pass
10.0MHz Band 16 QAM	1##Mid	2505	-0.97	4.55	27.76	22.24	167.494	Horizontal	Pass
		2535	-0.98	4.69	27.72	22.05	160.325	Horizontal	Pass
		2565	-1.25	4.72	27.70	21.73	148.936	Horizontal	Pass
15.0MHz Band 16 QAM	1##Mid	2507.5	-1.15	4.55	27.77	22.07	161.065	Horizontal	Pass
		2535	-1.12	4.69	27.72	21.91	155.239	Horizontal	Pass
		2562.5	-0.73	4.72	27.69	22.24	167.494	Horizontal	Pass
20.0MHz Band 16 QAM	1##Mid	2510	-1.03	4.57	27.78	22.18	165.196	Horizontal	Pass
		2535	-0.70	4.73	27.72	22.29	169.434	Horizontal	Pass
		2560	-0.80	4.75	27.68	22.13	163.305	Horizontal	Pass
5.0MHz Band 16 QAM	1##Mid	2502.5	-2.19	4.54	27.75	21.02	126.474	Vertical	Pass
		2535	-2.53	4.69	27.72	20.50	112.202	Vertical	Pass
		2567.5	-2.78	4.71	27.71	20.22	105.196	Vertical	Pass
10.0MHz Band 16 QAM	1##Mid	2505	-1.48	4.55	27.76	21.73	148.936	Vertical	Pass
		2535	-2.86	4.69	27.72	20.17	103.992	Vertical	Pass
		2565	-1.50	4.72	27.70	21.48	140.605	Vertical	Pass
15.0MHz Band 16 QAM	1##Mid	2507.5	-2.34	4.55	27.77	20.88	122.462	Vertical	Pass
		2535	-1.81	4.69	27.72	21.22	132.434	Vertical	Pass
		2562.5	-2.08	4.72	27.69	20.89	122.744	Vertical	Pass
20.0MHz Band 16 QAM	1##Mid	2510	-2.00	4.57	27.78	21.21	132.130	Vertical	Pass
		2535	-2.19	4.73	27.72	20.80	120.226	Vertical	Pass
		2560	-1.33	4.75	27.68	21.60	144.544	Vertical	Pass

8.5 LTE BAND 12

Radiated Power (ERP) for Band 12										
Mode	RB/RB SIZE	Frequency	Result							Conclusion
			SG	Cable	Factor	Correction	Max.	Max.	Polarization	
			Level	Loss	Gain		ERP	ERP	Of Max.	
			(dBm)	(dBm)	(dB)		Average	Average	ERP	
						(dB)	(dBm)	(mW)		
1.4MHz	Band 1/#Mid	699.7	7.51	1.91	19.21	2.15	22.66	184.502	Vertical	Pass
Band		707.5	7.43	1.91	19.26	2.15	22.63	183.231	Vertical	Pass
QPSK		715.3	7.21	1.93	19.34	2.15	22.47	176.604	Vertical	Pass
3.0MHz	Band 1/#Mid	700.5	7.30	1.91	19.21	2.15	22.45	175.792	Vertical	Pass
Band		707.5	7.22	1.91	19.26	2.15	22.42	174.582	Vertical	Pass
QPSK		714.5	7.06	1.93	19.34	2.15	22.32	170.608	Vertical	Pass
5.0MHz	Band 1/#Mid	701.5	7.57	1.91	19.23	2.15	22.74	187.932	Vertical	Pass
Band		707.5	7.48	1.91	19.26	2.15	22.68	185.353	Vertical	Pass
QPSK		713.5	7.27	1.92	19.33	2.15	22.53	179.061	Vertical	Pass
10.0MHz	Band 1/#Mid	704	7.59	1.91	19.25	2.15	22.78	189.671	Vertical	Pass
Band		707.5	7.57	1.91	19.26	2.15	22.77	189.234	Vertical	Pass
QPSK		711	7.42	1.92	19.32	2.15	22.67	184.927	Vertical	Pass
1.4MHz	Band 1/#Mid	699.7	5.90	1.91	19.21	2.15	21.05	127.350	Horizontal	Pass
Band		707.5	6.48	1.91	19.26	2.15	21.68	147.231	Horizontal	Pass
QPSK		715.3	6.13	1.93	19.34	2.15	21.39	137.721	Horizontal	Pass
3.0MHz	Band 1/#Mid	700.5	6.36	1.91	19.21	2.15	21.51	141.579	Horizontal	Pass
Band		707.5	6.28	1.91	19.26	2.15	21.48	140.605	Horizontal	Pass
QPSK		714.5	6.59	1.93	19.34	2.15	21.85	153.109	Horizontal	Pass
5.0MHz	Band 1/#Mid	701.5	6.31	1.91	19.23	2.15	21.48	140.605	Horizontal	Pass
Band		707.5	6.03	1.91	19.26	2.15	21.23	132.739	Horizontal	Pass
QPSK		713.5	5.78	1.92	19.33	2.15	21.04	127.057	Horizontal	Pass
10.0MHz	Band 1/#Mid	704	6.73	1.91	19.25	2.15	21.92	155.597	Horizontal	Pass
Band		707.5	6.74	1.91	19.26	2.15	21.94	156.315	Horizontal	Pass
QPSK		711	5.71	1.92	19.32	2.15	20.96	124.738	Horizontal	Pass

Radiated Power (ERP) for Band 12										
Mode	RB/RB SIZE	Frequency	Result							Conclusion
			SG Level	Cable Loss	Factor Gain	Correction	Max. ERP	Max.ERP	Polarization	
			(dBm)	(dBm)	(dB)	(dB)	Average	Average	Of Max. ERP	
							(dBm)	(mW)		
1.4MHz	Band 16 QAM	699.7	7.53	1.91	19.21	2.15	22.68	185.353	Vertical	Pass
		707.5	7.45	1.91	19.26	2.15	22.65	184.077	Vertical	Pass
		715.3	7.23	1.93	19.34	2.15	22.49	177.419	Vertical	Pass
3.0MHz	Band 16 QAM	700.5	7.32	1.91	19.21	2.15	22.47	176.604	Vertical	Pass
		707.5	7.24	1.91	19.26	2.15	22.44	175.388	Vertical	Pass
		714.5	7.08	1.93	19.34	2.15	22.34	171.396	Vertical	Pass
5.0MHz	Band 16 QAM	701.5	7.59	1.91	19.23	2.15	22.76	188.799	Vertical	Pass
		707.5	7.50	1.91	19.26	2.15	22.70	186.209	Vertical	Pass
		713.5	7.29	1.92	19.33	2.15	22.55	179.887	Vertical	Pass
10.0MHz	Band 16 QAM	704	7.61	1.91	19.25	2.15	22.80	190.546	Vertical	Pass
		707.5	7.59	1.91	19.26	2.15	22.79	190.108	Vertical	Pass
		711	7.44	1.92	19.32	2.15	22.69	185.780	Vertical	Pass
1.4MHz	Band 16 QAM	699.7	6.09	1.91	19.21	2.15	21.24	133.045	Horizontal	Pass
		707.5	6.08	1.91	19.26	2.15	21.28	134.276	Horizontal	Pass
		715.3	6.63	1.93	19.34	2.15	21.89	154.525	Horizontal	Pass
3.0MHz	Band 16 QAM	700.5	5.86	1.91	19.21	2.15	21.01	126.183	Horizontal	Pass
		707.5	6.30	1.91	19.26	2.15	21.50	141.254	Horizontal	Pass
		714.5	5.75	1.93	19.34	2.15	21.01	126.183	Horizontal	Pass
5.0MHz	Band 16 QAM	701.5	6.41	1.91	19.23	2.15	21.58	143.880	Horizontal	Pass
		707.5	6.03	1.91	19.26	2.15	21.23	132.739	Horizontal	Pass
		713.5	5.88	1.92	19.33	2.15	21.14	130.017	Horizontal	Pass
10.0MHz	Band 16 QAM	704	6.53	1.91	19.25	2.15	21.72	148.594	Horizontal	Pass
		707.5	6.26	1.91	19.26	2.15	21.46	139.959	Horizontal	Pass
		711	6.36	1.92	19.32	2.15	21.61	144.877	Horizontal	Pass

8.6 LTE BAND 17

Radiated Power (ERP) for Band 17										
Mode	RB/RB SIZE	Frequency	Result							Conclusion
			SG	Cable	Factor	Correction	Max.	Max.	Polarization	
			Level	Loss	Gain		ERP	ERP	Of Max.	
			(dBm)	(dBm)	(dB)		Average	Average	ERP	
						(dB)	(dBm)	(mW)		
5.0MHz Band QPSK	1/#Mid	706.5	7.32	1.91	19.23	2.15	22.49	177.419	Vertical	Pass
		710	7.18	1.91	19.26	2.15	22.38	172.982	Vertical	Pass
		713.5	7.08	1.92	19.33	2.15	22.34	171.396	Vertical	Pass
10.0MHz Band QPSK	1/#Mid	709	7.33	1.91	19.25	2.15	22.52	178.649	Vertical	Pass
		710	7.28	1.91	19.26	2.15	22.48	177.011	Vertical	Pass
		711	7.24	1.92	19.32	2.15	22.49	177.419	Vertical	Pass
5.0MHz Band QPSK	1/#Mid	706.5	6.00	1.91	19.23	2.15	21.17	130.918	Horizontal	Pass
		710	5.53	1.91	19.26	2.15	20.73	118.304	Horizontal	Pass
		713.5	5.69	1.92	19.33	2.15	20.95	124.451	Horizontal	Pass
10.0MHz Band QPSK	1/#Mid	709	6.18	1.91	19.25	2.15	21.37	137.088	Horizontal	Pass
		710	6.31	1.91	19.26	2.15	21.51	141.579	Horizontal	Pass
		711	5.07	1.92	19.32	2.15	20.32	107.647	Horizontal	Pass

Radiated Power (ERP) for Band 17										
Mode	RB/RB SIZE	Frequency	Result							Conclusion
			SG Level	Cable Loss	Factor Gain	Correction	Max. ERP	Max.ERP	Polarization	
			(dBm)	(dBm)	(dB)		Average	Average	Of Max. ERP	
							(dBm)	(mW)		
5.0MHz	1/#Mid	706.5	6.87	1.91	19.23	2.15	22.04	159.956	Vertical	Pass
Band 16		710	6.78	1.91	19.26	2.15	21.98	157.761	Vertical	Pass
QAM		713.5	6.58	1.92	19.33	2.15	21.84	152.757	Vertical	Pass
10.0MHz	1/#Mid	709	6.41	1.91	19.25	2.15	21.60	144.544	Vertical	Pass
Band 16		710	6.94	1.91	19.26	2.15	22.14	163.682	Vertical	Pass
QAM		711	6.67	1.92	19.32	2.15	21.92	155.597	Vertical	Pass
5.0MHz	1/#Mid	706.5	6.15	1.91	19.23	2.15	21.32	135.519	Horizontal	Pass
Band 16		710	6.16	1.91	19.26	2.15	21.36	136.773	Horizontal	Pass
QAM		713.5	6.21	1.92	19.33	2.15	21.47	140.281	Horizontal	Pass
10.0MHz	1/#Mid	709	6.21	1.91	19.25	2.15	21.40	138.038	Horizontal	Pass
Band 16		710	5.65	1.91	19.26	2.15	20.85	121.619	Horizontal	Pass
QAM		711	6.10	1.92	19.32	2.15	21.35	136.458	Horizontal	Pass

8.7 LTE BAND 66

Radiated Power (EIRP) for Band 66									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Factor Gain (dB)	Max.	Max.	Polarization Of Max. ERP	
						EIRP	EIRP		
						Average (dBm)	Average (mW)		
1.4MHz Band QPSK	1/#Mid	1710.7	-2.01	3.76	28.24	22.47	176.604	Horizontal	Pass
		1745	-1.87	3.91	28.22	22.44	175.388	Horizontal	Pass
		1779.3	-1.74	3.93	28.2	22.53	179.061	Horizontal	Pass
3.0MHz Band QPSK	1/#Mid	1711.5	-2.07	3.77	28.23	22.39	173.380	Horizontal	Pass
		1745	-1.98	3.91	28.24	22.35	171.791	Horizontal	Pass
		1778.5	-2.00	3.94	28.25	22.31	170.216	Horizontal	Pass
5.0MHz Band QPSK	1/#Mid	1712.5	-1.97	3.77	28.31	22.57	180.717	Horizontal	Pass
		1745	-1.65	3.91	28.22	22.66	184.502	Horizontal	Pass
		1777.5	-1.71	3.94	28.2	22.55	179.887	Horizontal	Pass
10.0MHz Band QPSK	1/#Mid	1715	-1.86	3.79	28.33	22.68	185.353	Horizontal	Pass
		1745	-1.59	3.95	28.22	22.68	185.353	Horizontal	Pass
		1775	-1.60	3.97	28.19	22.62	182.810	Horizontal	Pass
15.0MHz Band QPSK	1/#Mid	1717.5	-1.88	3.79	28.34	22.67	184.927	Horizontal	Pass
		1745	-1.69	3.95	28.22	22.58	181.134	Horizontal	Pass
		1772.5	-1.64	3.97	28.18	22.57	180.717	Horizontal	Pass
20.0MHz Band QPSK	1/#Mid	1720	-1.85	3.81	28.35	22.69	185.780	Horizontal	Pass
		1745	-1.59	3.96	28.22	22.67	184.927	Horizontal	Pass
		1770	-1.61	4	28.16	22.55	179.887	Horizontal	Pass
1.4MHz Band QPSK	1/#Mid	1710.7	-3.36	3.76	28.24	21.12	129.420	Vertical	Pass
		1745	-3.23	3.91	28.22	21.08	128.233	Vertical	Pass
		1779.3	-3.02	3.93	28.2	21.25	133.352	Vertical	Pass
3.0MHz Band QPSK	1/#Mid	1711.5	-3.17	3.77	28.23	21.29	134.586	Vertical	Pass
		1745	-2.49	3.91	28.24	21.84	152.757	Vertical	Pass
		1778.5	-2.86	3.94	28.25	21.45	139.637	Vertical	Pass
5.0MHz Band QPSK	1/#Mid	1712.5	-3.11	3.77	28.31	21.43	138.995	Vertical	Pass
		1745	-2.53	3.91	28.22	21.78	150.661	Vertical	Pass
		1777.5	-3.24	3.94	28.2	21.02	126.474	Vertical	Pass
10.0MHz Band	1/#Mid	1715	-3.25	3.79	28.34	21.30	134.896	Vertical	Pass
		1745	-3.07	3.95	28.22	21.20	131.826	Vertical	Pass

QPSK		1775	-2.57	3.97	28.18	21.64	145.881	Vertical	Pass
15.0MHz	1/#Mid	1717.5	-3.18	3.81	28.35	21.36	136.773	Vertical	Pass
Band		1745	-2.52	3.96	28.22	21.74	149.279	Vertical	Pass
QPSK		1772.5	-3.08	4	28.16	21.08	128.233	Vertical	Pass
20.0MHz	1/#Mid	1720	-2.90	3.79	28.34	21.65	146.218	Vertical	Pass
Band		1745	-2.66	3.95	28.22	21.61	144.877	Vertical	Pass
QPSK		1770	-2.59	3.97	28.18	21.62	145.211	Vertical	Pass

Radiated Power (EIRP) for Band 66									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Factor Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
1.4MHz	Band 16 QAM	1710.7	-2.84	3.76	28.24	21.64	145.881	Horizontal	Pass
1745		-2.45	3.91	28.22	21.86	153.462	Horizontal	Pass	
1779.3		-2.63	3.93	28.2	21.64	145.881	Horizontal	Pass	
3.0MHz	Band 16 QAM	1711.5	-3.23	3.77	28.23	21.23	132.739	Horizontal	Pass
1745		-2.48	3.91	28.24	21.85	153.109	Horizontal	Pass	
1778.5		-2.77	3.94	28.25	21.54	142.561	Horizontal	Pass	
5.0MHz	Band 16 QAM	1712.5	-2.65	3.77	28.31	21.89	154.525	Horizontal	Pass
1745		-2.71	3.91	28.22	21.60	144.544	Horizontal	Pass	
1777.5		-2.38	3.94	28.2	21.88	154.170	Horizontal	Pass	
10.0MHz	Band 16 QAM	1715	-2.70	3.79	28.33	21.84	152.757	Horizontal	Pass
1745		-2.36	3.95	28.22	21.91	155.239	Horizontal	Pass	
1775		-2.68	3.97	28.19	21.54	142.561	Horizontal	Pass	
15.0MHz	Band 16 QAM	1717.5	-2.69	3.79	28.34	21.86	153.462	Horizontal	Pass
1745		-2.51	3.95	28.22	21.76	149.968	Horizontal	Pass	
1772.5		-2.30	3.97	28.18	21.91	155.239	Horizontal	Pass	
20.0MHz	Band 16 QAM	1720	-2.52	3.81	28.35	22.02	159.221	Horizontal	Pass
1745		-2.30	3.96	28.22	21.96	157.036	Horizontal	Pass	
1770		-2.24	4	28.16	21.92	155.597	Horizontal	Pass	
1.4MHz	Band 16 QAM	1710.7	-4.50	3.76	28.24	19.98	99.541	Vertical	Pass
1745		-4.10	3.91	28.22	20.21	104.954	Vertical	Pass	
1779.3		-3.29	3.93	28.2	20.98	125.314	Vertical	Pass	
3.0MHz	Band 16 QAM	1711.5	-4.41	3.77	28.23	20.05	101.158	Vertical	Pass
1745		-2.59	3.91	28.24	21.74	149.279	Vertical	Pass	
1778.5		-4.01	3.94	28.25	20.30	107.152	Vertical	Pass	
5.0MHz	Band 16 QAM	1712.5	-2.86	3.77	28.31	21.68	147.231	Vertical	Pass
1745		-3.30	3.91	28.22	21.01	126.183	Vertical	Pass	
1777.5		-2.87	3.94	28.2	21.39	137.721	Vertical	Pass	
10.0MHz	Band 16 QAM	1715	-3.37	3.79	28.34	21.18	131.220	Vertical	Pass
1745		-3.11	3.95	28.22	21.16	130.617	Vertical	Pass	
1775		-3.29	3.97	28.18	20.92	123.595	Vertical	Pass	

15.0MHz		1717.5	-4.26	3.81	28.35	20.28	106.660	Vertical	Pass
Band 16	1/#Mid	1745	-4.10	3.96	28.22	20.16	103.753	Vertical	Pass
QAM		1772.5	-3.66	4	28.16	20.50	112.202	Vertical	Pass
20.0MHz		1720	-4.47	3.79	28.34	20.08	101.859	Vertical	Pass
Band 16	1/#Mid	1745	-3.86	3.95	28.22	20.41	109.901	Vertical	Pass
QAM		1770	-2.74	3.97	28.18	21.47	140.281	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

Factor Gain(dB)=Antenna Gain(dB) + Amplifier Factor (dB)

9. SPURIOUS RADIATION EMISSION

RULE PART(S)

FCC: §2.1051, §22.917(a), §24.238(a), §27.53(c)(g)(h)(m)

LIMIT

For Band 7, the minimum permissible attenuation level of any spurious emission is $55 + \log_{10}(P)$ [Watts]).

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P)$ [Watts]), where P is the transmitter power in Watts.

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

The unwanted emission power shall be measured with a resolution bandwidth of at least 1% of the occupied bandwidth in the 1 MHz band immediately outside and adjacent to the channel edge of the equipment. Beyond the 1 MHz band immediately outside the channel edge of the equipment, a resolution bandwidth of 1 MHz shall be employed. A narrower resolution bandwidth is allowed to be used provided that the measured power is integrated over the full required measurement bandwidth of 1 MHz or 1% of the occupied bandwidth as applicable.

The power of any unwanted emissions measured from the channel edge of the equipment shall be attenuated below the transmitter power, P (dBW), as follows:

- a. for base station and subscriber equipment, other than mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \log_{10}(p)$, dB; and
- b. for mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \log_{10}(p)$, dB at the channel edges and $55 + 10 \log_{10}(p)$ at 5.5 MHz away and beyond the channel edges where p in (a) and (b) is the transmitter power measured in watts.

MODES TESTED

- ☐ LTE Band2
LTE Band 4
- ☐ LTE Band 5
LTE Band 7
LTE Band 12
LTE Band 17
LTE Band 66

RESULTS

PASS

9.1 LTE BAND 2

QPSK EIRP POWER FOR LTE BAND 2 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 1850.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Factor Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3701.4	-47.87	4.04	33.51	-18.40	-13	-5.40	Horizontal
3701.4	-48.19	4.04	33.51	-18.72	-13	-5.72	Vertical
5552.1	-48.33	5.24	35.84	-17.73	-13	-4.73	Vertical
5552.1	-53.89	5.24	35.84	-23.29	-13	-10.29	Horizontal
180.8	-42.81	1.43	16.02	-28.22	-13	-15.22	Vertical
282.3	-39.16	1.30	17.99	-22.47	-13	-9.47	Horizontal
Test Results for Mid Channel 1880MHz							
3760.0	-50.41	4.04	33.56	-20.89	-13	-7.89	Horizontal
3760.0	-51.82	4.04	33.56	-22.30	-13	-9.30	Vertical
5640.0	-53.19	5.24	35.91	-22.52	-13	-9.52	Vertical
5640.0	-50.21	5.24	35.91	-19.54	-13	-6.54	Horizontal
210.7	-37.48	1.62	16.97	-22.13	-13	-9.13	Vertical
299.1	-44.21	1.74	15.98	-29.98	-13	-16.98	Horizontal
Test Results for High Channel 1909.3MHz							
3818.6	-46.96	4.04	34.00	-17.00	-13	-4.00	Horizontal
3818.6	-53.64	4.04	34.00	-23.68	-13	-10.68	Vertical
5727.9	-48.00	5.24	36.04	-17.20	-13	-4.20	Vertical
5727.9	-50.64	5.24	36.04	-19.84	-13	-6.84	Horizontal
183.0	-38.26	1.42	17.29	-22.39	-13	-9.39	Vertical
411.7	-34.46	1.50	17.90	-18.05	-13	-5.05	Horizontal

QPSK EIRP POWER FOR LTE BAND 2 (20.0MHZ BANDWIDTH)

Test Results for Low Channel 1860MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3720.0	-49.74	4.07	33.54	-20.27	-13	-7.27	Horizontal
3720.0	-52.53	4.07	33.54	-23.06	-13	-10.06	Vertical
5580.0	-50.83	5.28	35.86	-20.25	-13	-7.25	Vertical
5580.0	-53.27	5.28	35.86	-22.69	-13	-9.69	Horizontal
180.9	-44.52	1.58	16.89	-29.20	-13	-16.20	Vertical
459.5	-34.15	1.76	17.26	-18.65	-13	-5.65	Horizontal
Test Results for Mid Channel 1880MHz							
3760.0	-53.93	4.04	33.56	-24.41	-13	-11.41	Horizontal
3760.0	-51.21	4.04	33.56	-21.69	-13	-8.69	Vertical
5640.0	-45.46	5.24	35.91	-14.79	-13	-1.79	Vertical
5640.0	-52.40	5.24	35.91	-21.73	-13	-8.73	Horizontal
197.0	-39.95	1.46	16.27	-25.14	-13	-12.14	Vertical
257.5	-34.34	1.59	15.15	-20.78	-13	-7.78	Horizontal
Test Results for High Channel 1900MHz							
3800.0	-53.26	4.04	34.00	-23.30	-13	-10.30	Horizontal
3800.0	-48.61	4.04	34.00	-18.65	-13	-5.65	Vertical
5700.0	-51.31	5.24	36.04	-20.51	-13	-7.51	Vertical
5700.0	-50.05	5.24	36.04	-19.25	-13	-6.25	Horizontal
178.8	-41.29	1.36	17.39	-25.25	-13	-12.25	Vertical
322.4	-35.89	1.66	15.39	-22.16	-13	-9.16	Horizontal

Note: Spurious Emission Level = Spectrum Analyzer Read Value + Cable Loss+ Antenna Factor + 11.74
 . Margin = Spurious Emission Level - Limit
 . Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.2 LTE BAND 4

QPSK EIRP POWER FOR LTE BAND 4 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 1710.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3421.4	-46.50	4.02	29.80	-20.72	-13	-7.72	Horizontal
3421.4	-49.41	4.02	29.80	-23.63	-13	-10.63	Vertical
5132.1	-51.38	5.24	35.84	-20.78	-13	-7.78	Vertical
5132.1	-53.34	5.24	35.84	-22.74	-13	-9.74	Horizontal
212.5	-38.90	1.68	16.04	-24.54	-13	-11.54	Vertical
267.2	-34.05	1.78	17.74	-18.09	-13	-5.09	Horizontal
Test Results for Mid Channel 1732.5MHz							
3465.0	-48.04	4.03	30.00	-22.07	-13	-9.07	Horizontal
3465.0	-44.20	4.03	30.00	-18.23	-13	-5.23	Vertical
5197.5	-53.78	5.25	35.86	-23.17	-13	-10.17	Vertical
5197.5	-51.04	5.25	35.86	-20.43	-13	-7.43	Horizontal
211.2	-43.19	1.72	17.69	-27.22	-13	-14.22	Vertical
247.5	-40.49	1.62	16.02	-26.08	-13	-13.08	Horizontal
Test Results for High Channel 1754.3MHz							
3508.6	-48.79	4.05	30.01	-22.83	-13	-9.83	Horizontal
3508.6	-44.39	4.05	30.01	-18.43	-13	-5.43	Vertical
5262.9	-49.03	5.26	35.86	-18.43	-13	-5.43	Vertical
5262.9	-50.16	5.26	35.86	-19.56	-13	-6.56	Horizontal
205.6	-44.54	1.80	16.69	-29.65	-13	-16.65	Vertical
320.8	-34.68	1.75	16.66	-19.78	-13	-6.78	Horizontal

QPSK EIRP POWER FOR LTE BAND 4 (20.0MHZ BANDWIDTH)

Test Results for Low Channel 1720MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3440.0	-49.93	4.02	29.80	-24.15	-13	-11.15	Horizontal
3440.0	-53.16	4.02	29.80	-27.38	-13	-14.38	Vertical
5160.0	-45.72	5.24	35.84	-15.12	-13	-2.12	Vertical
5160.0	-49.46	5.24	35.84	-18.86	-13	-5.86	Horizontal
204.6	-40.74	1.57	17.26	-25.05	-13	-12.05	Vertical
245.9	-35.56	1.78	16.35	-20.99	-13	-7.99	Horizontal
Test Results for Mid Channel 1732.5MHz							
3465.0	-46.46	4.03	30.00	-20.49	-13	-7.49	Horizontal
3465.0	-52.30	4.03	30.00	-26.33	-13	-13.33	Vertical
5197.5	-53.04	5.25	35.86	-22.43	-13	-9.43	Vertical
5197.5	-52.65	5.25	35.86	-22.04	-13	-9.04	Horizontal
186.6	-41.21	1.44	17.95	-24.70	-13	-11.70	Vertical
328.5	-44.17	1.65	16.09	-29.73	-13	-16.73	Horizontal
Test Results for High Channel 1745MHz							
3490.0	-51.09	2.91	27.68	-26.32	-13	-13.32	Horizontal
3490.0	-45.12	2.91	27.68	-20.35	-13	-7.35	Vertical
5235.0	-49.66	5.26	35.86	-19.06	-13	-6.06	Vertical
5235.0	-51.55	5.26	35.86	-20.95	-13	-7.95	Horizontal
194.5	-35.86	1.61	16.85	-20.62	-13	-7.62	Vertical
308.3	-39.77	1.61	15.19	-26.19	-13	-13.19	Horizontal

Note: Spurious Emission Level = Spectrum Analyzer Read Value + Cable Loss+ Antenna Factor + 11.74

. Margin = Spurious Emission Level - Limit

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.3 LTE BAND 5

QPSK EIRP POWER FOR LTE BAND 5 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 824.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1649.4	-50.83	2.78	27.50	-26.11	-13	-13.11	Horizontal
1649.4	-52.28	2.78	27.50	-27.56	-13	-14.56	Vertical
2474.1	-45.70	2.90	27.80	-20.80	-13	-7.80	Vertical
2474.1	-53.26	2.90	27.80	-28.36	-13	-15.36	Horizontal
193.3	-36.46	1.76	17.59	-20.63	-13	-7.63	Vertical
401.2	-39.09	1.63	15.87	-24.85	-13	-11.85	Horizontal
Test Results For Mid Channel 836.5MHz							
1673.0	-45.90	2.80	27.48	-21.22	-13	-8.22	Horizontal
1673.0	-49.55	2.80	27.48	-24.87	-13	-11.87	Vertical
2509.5	-51.19	2.91	27.70	-26.40	-13	-13.40	Vertical
2509.5	-53.24	2.91	27.70	-28.45	-13	-15.45	Horizontal
190.4	-39.59	1.61	15.68	-25.52	-13	-12.52	Vertical
363.5	-44.56	1.59	17.52	-28.64	-13	-15.64	Horizontal
Test Results for High Channel 848.3MHz							
1696.6	-47.01	2.82	27.43	-22.40	-13	-9.40	Horizontal
1696.6	-44.23	2.82	27.43	-19.62	-13	-6.62	Vertical
2544.9	-51.30	2.92	27.74	-26.48	-13	-13.48	Vertical
2544.9	-50.82	2.92	27.74	-26.00	-13	-13.00	Horizontal
194.2	-38.22	1.69	16.67	-23.23	-13	-10.23	Vertical
233.3	-38.87	1.70	17.18	-23.39	-13	-10.39	Horizontal

QPSK EIRP POWER FOR LTE BAND 5 (10MHZ BANDWIDTH)

Test Results for Low Channel 829MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1658.0	-48.68	2.78	27.50	-23.96	-13	-10.96	Horizontal
1658.0	-48.30	2.78	27.50	-23.58	-13	-10.58	Vertical
2487.0	-48.77	2.90	27.80	-23.87	-13	-10.87	Vertical
2487.0	-49.34	2.90	27.80	-24.44	-13	-11.44	Horizontal
208.5	-39.42	1.71	15.57	-25.56	-13	-12.56	Vertical
465.3	-41.57	1.34	16.40	-26.51	-13	-13.51	Horizontal
Test Results for Mid Channel 836.5MHz							
1673.0	-51.22	2.80	27.48	-26.54	-13	-13.54	Horizontal
1673.0	-53.25	2.80	27.48	-28.57	-13	-15.57	Vertical
2509.5	-46.53	2.91	27.70	-21.74	-13	-8.74	Vertical
2509.5	-53.18	2.91	27.70	-28.39	-13	-15.39	Horizontal
189.7	-39.95	1.44	17.04	-24.35	-13	-11.35	Vertical
249.0	-37.80	1.76	17.62	-21.94	-13	-8.94	Horizontal
Test Results for High Channel 844MHz							
1688.0	-50.24	2.82	27.43	-25.63	-13	-12.63	Horizontal
1688.0	-47.39	2.82	27.43	-22.78	-13	-9.78	Vertical
2532.0	-50.81	2.92	27.74	-25.99	-13	-12.99	Vertical
2532.0	-50.28	2.92	27.74	-25.46	-13	-12.46	Horizontal
177.4	-41.44	1.74	17.70	-25.48	-13	-12.48	Vertical
444.4	-39.43	1.41	17.46	-23.37	-13	-10.37	Horizontal

Note: Spurious Emission Level = Spectrum Analyzer Read Value + Cable Loss+ Antenna Factor + 11.74

. Margin = Spurious Emission Level - Limit

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.4 LTE BAND 7

QPSK EIRP POWER FOR LTE BAND 7 (5.0MHZ BANDWIDTH)

Test Results for Low Channel 2502.5MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
5005.0	-64.21	5.23	35.81	-33.63	-25	-8.63	Horizontal
5005.0	-64.05	5.23	35.81	-33.47	-25	-8.47	Vertical
7507.5	-62.18	5.67	36.85	-31.00	-25	-6.00	Vertical
7507.5	-61.06	5.67	36.85	-29.88	-25	-4.88	Horizontal
184.8	-49.45	1.73	17.97	-33.21	-25	-8.21	Vertical
250.7	-46.43	1.38	15.11	-32.70	-25	-7.70	Horizontal
Test Results for Mid Channel 2535MHz							
5070.0	-59.71	5.23	35.82	-29.12	-25	-4.12	Horizontal
5070.0	-59.31	5.23	35.82	-28.72	-25	-3.72	Vertical
7605.0	-61.46	5.67	36.85	-30.28	-25	-5.28	Vertical
7605.0	-60.77	5.67	36.85	-29.59	-25	-4.59	Horizontal
190.6	-48.68	1.77	16.17	-34.27	-25	-9.27	Vertical
260.2	-50.96	1.63	15.21	-37.38	-25	-12.38	Horizontal
Test Results for High Channel 2567.5MHz							
5135.0	-64.19	5.24	35.83	-33.60	-25	-8.60	Horizontal
5135.0	-63.41	5.24	35.83	-32.82	-25	-7.82	Vertical
7702.5	-64.55	5.68	36.87	-33.36	-25	-8.36	Vertical
7702.5	-63.01	5.68	36.87	-31.82	-25	-6.82	Horizontal
211.4	-50.00	1.58	17.56	-34.02	-25	-9.02	Vertical
346.3	-48.05	1.45	16.58	-32.92	-25	-7.92	Horizontal

QPSK EIRP POWER FOR LTE BAND 7 (20.0MHZ BANDWIDTH)

Test Results for Low Channel 2510MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
5020.0	-63.80	5.23	35.82	-33.21	-25	-8.21	Horizontal
5020.0	-63.57	5.23	35.82	-32.98	-25	-7.98	Vertical
7530.0	-62.69	5.67	36.86	-31.50	-25	-6.50	Vertical
7530.0	-61.85	5.67	36.86	-30.66	-25	-5.66	Horizontal
185.4	-51.24	1.63	15.76	-37.11	-25	-12.11	Vertical
439.8	-50.47	1.71	15.44	-36.74	-25	-11.74	Horizontal
Test Results for Mid Channel 2535MHz							
5070.0	-62.01	5.23	35.82	-31.42	-25	-6.42	Horizontal
5070.0	-59.81	5.23	35.82	-29.22	-25	-4.22	Vertical
7605.0	-60.87	5.67	36.85	-29.69	-25	-4.69	Vertical
7605.0	-62.33	5.67	36.85	-31.15	-25	-6.15	Horizontal
199.7	-54.82	1.79	16.84	-39.76	-25	-14.76	Vertical
339.5	-46.39	1.71	17.64	-30.46	-25	-5.46	Horizontal
Test Results for High Channel 2560MHz							
5120.0	-59.44	5.24	35.83	-28.85	-25	-3.85	Horizontal
5120.0	-59.77	5.24	35.83	-29.18	-25	-4.18	Vertical
7680.0	-61.47	5.70	36.88	-30.29	-25	-5.29	Vertical
7680.0	-59.09	5.70	36.88	-27.91	-25	-2.91	Horizontal
197.1	-48.77	1.79	16.84	-33.71	-25	-8.71	Vertical
461.9	-44.63	1.71	17.64	-28.70	-25	-3.70	Horizontal

Note: Spurious Emission Level = Spectrum Analyzer Read Value + Cable Loss+ Antenna Factor + 11.74

. Margin = Spurious Emission Level - Limit

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.5 LTE BAND 12

QPSK EIRP POWER FOR LTE BAND 12 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 699.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1399.4	-51.99	2.60	27.20	-27.39	-13	-14.39	Horizontal
1399.4	-47.66	2.60	27.20	-23.06	-13	-10.06	Vertical
2099.1	-52.89	2.85	27.54	-28.20	-13	-15.20	Vertical
2099.1	-53.85	2.85	27.54	-29.16	-13	-16.16	Horizontal
176.8	-36.92	1.49	17.78	-20.63	-13	-7.63	Vertical
431.2	-44.61	1.36	17.33	-28.64	-13	-15.64	Horizontal
Test Results For Mid Channel 707.5MHz							
1415.0	-49.75	2.61	27.28	-25.08	-13	-12.08	Horizontal
1415.0	-49.49	2.61	27.28	-24.82	-13	-11.82	Vertical
2122.5	-50.54	2.87	27.59	-25.82	-13	-12.82	Vertical
2122.5	-53.01	2.87	27.59	-28.29	-13	-15.29	Horizontal
195.6	-38.86	1.73	15.74	-24.85	-13	-11.85	Vertical
263.6	-40.70	1.62	15.79	-26.53	-13	-13.53	Horizontal
Test Results for High Channel 715.3MHz							
1430.6	-45.47	2.63	27.28	-20.82	-13	-7.82	Horizontal
1430.6	-52.51	2.63	27.28	-27.86	-13	-14.86	Vertical
2145.9	-52.63	2.88	27.60	-27.91	-13	-14.91	Vertical
2145.9	-52.13	2.88	27.60	-27.41	-13	-14.41	Horizontal
194.9	-44.70	1.61	18.00	-28.31	-13	-15.31	Vertical
271.1	-44.17	1.45	15.49	-30.14	-13	-17.14	Horizontal

QPSK EIRP POWER FOR LTE BAND 12 (10MHZ BANDWIDTH)

Test Results for Low Channel 704MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1408.0	-52.66	2.61	27.26	-28.01	-13	-15.01	Horizontal
1408.0	-49.78	2.61	27.26	-25.13	-13	-12.13	Vertical
2112.0	-47.61	2.87	27.58	-22.90	-13	-9.90	Vertical
2112.0	-50.91	2.87	27.58	-26.20	-13	-13.20	Horizontal
197.8	-35.51	1.31	16.97	-19.85	-13	-6.85	Vertical
366.0	-40.38	1.65	16.70	-25.33	-13	-12.33	Horizontal
Test Results for Mid Channel 707.5MHz							
1415.0	-47.94	2.61	27.28	-23.27	-13	-10.27	Horizontal
1415.0	-50.03	2.61	27.28	-25.36	-13	-12.36	Vertical
2122.5	-45.74	2.87	27.59	-21.02	-13	-8.02	Vertical
2122.5	-52.15	2.87	27.59	-27.43	-13	-14.43	Horizontal
180.6	-44.78	1.72	17.99	-28.51	-13	-15.51	Vertical
441.3	-42.70	1.73	17.94	-26.49	-13	-13.49	Horizontal
Test Results for High Channel 711MHz							
1422.0	-44.50	2.62	27.28	-19.84	-13	-6.84	Horizontal
1422.0	-45.34	2.62	27.28	-20.68	-13	-7.68	Vertical
2133.0	-47.91	2.87	27.60	-23.18	-13	-10.18	Vertical
2133.0	-50.49	2.87	27.60	-25.76	-13	-12.76	Horizontal
182.7	-42.23	1.58	15.93	-27.88	-13	-14.88	Vertical
262.4	-40.44	1.36	15.59	-26.21	-13	-13.21	Horizontal

Note: Spurious Emission Level = Spectrum Analyzer Read Value + Cable Loss+ Antenna Factor + 11.74

. Margin = Spurious Emission Level - Limit

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.6 LTE BAND 17

QPSK EIRP POWER FOR LTE BAND 17 (5MHZ BANDWIDTH)

Test Results for Low Channel 706.5MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1413.0	-46.57	2.61	27.28	-21.90	-13	-8.90	Horizontal
1413.0	-47.53	2.61	27.28	-22.86	-13	-9.86	Vertical
2119.5	-48.59	2.87	27.59	-23.87	-13	-10.87	Vertical
2119.5	-51.14	2.87	27.59	-26.42	-13	-13.42	Horizontal
194.8	-37.87	1.71	16.15	-23.43	-13	-10.43	Vertical
351.3	-42.58	1.41	17.32	-26.67	-13	-13.67	Horizontal
Test Results For Mid Channel 710MHz							
1420.0	-45.66	2.62	27.30	-20.98	-13	-7.98	Horizontal
1420.0	-51.67	2.62	27.30	-26.99	-13	-13.99	Vertical
2130.0	-48.69	2.87	27.62	-23.94	-13	-10.94	Vertical
2130.0	-52.31	2.87	27.62	-27.56	-13	-14.56	Horizontal
190.1	-38.99	1.42	15.25	-25.17	-13	-12.17	Vertical
324.3	-42.37	1.36	17.19	-26.54	-13	-13.54	Horizontal
Test Results for High Channel 713.5MHz							
1427.0	-48.21	2.66	27.28	-23.59	-13	-10.59	Horizontal
1427.0	-44.92	2.66	27.28	-20.30	-13	-7.30	Vertical
2140.5	-48.05	2.88	27.60	-23.33	-13	-10.33	Vertical
2140.5	-53.72	2.88	27.60	-29.00	-13	-16.00	Horizontal
186.2	-36.68	1.32	17.29	-20.71	-13	-7.71	Vertical
346.7	-41.42	1.72	16.89	-26.25	-13	-13.25	Horizontal

QPSK EIRP POWER FOR LTE BAND 17 (10MHZ BANDWIDTH)

Test Results for Low Channel 709MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1418.0	-51.07	2.62	27.30	-26.39	-13	-13.39	Horizontal
1418.0	-47.47	2.62	27.30	-22.79	-13	-9.79	Vertical
2127.0	-49.24	2.87	27.62	-24.49	-13	-11.49	Vertical
2127.0	-50.29	2.87	27.62	-25.54	-13	-12.54	Horizontal
194.0	-44.85	1.35	16.91	-29.29	-13	-16.29	Vertical
384.4	-35.87	1.62	16.31	-21.18	-13	-8.18	Horizontal
Test Results for Mid Channel 710MHz							
1420.0	-45.82	2.62	27.30	-21.14	-13	-8.14	Horizontal
1420.0	-53.92	2.62	27.30	-29.24	-13	-16.24	Vertical
2130.0	-44.99	2.87	27.62	-20.24	-13	-7.24	Vertical
2130.0	-50.64	2.87	27.62	-25.89	-13	-12.89	Horizontal
190.1	-43.19	1.51	17.14	-27.56	-13	-14.56	Vertical
366.6	-44.27	1.77	16.88	-29.16	-13	-16.16	Horizontal
Test Results for High Channel 711MHz							
1422.0	-47.75	2.62	27.30	-23.07	-13	-10.07	Horizontal
1422.0	-48.24	2.62	27.30	-23.56	-13	-10.56	Vertical
2133.0	-49.11	2.87	27.62	-24.36	-13	-11.36	Vertical
2133.0	-49.15	2.87	27.62	-24.40	-13	-11.40	Horizontal
195.2	-39.82	1.78	15.95	-25.65	-13	-12.65	Vertical
363.2	-41.47	1.34	17.95	-24.87	-13	-11.87	Horizontal

Note: Spurious Emission Level = Spectrum Analyzer Read Value + Cable Loss+ Antenna Factor + 11.74

. Margin = Spurious Emission Level - Limit

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.7 LTE BAND 66

QPSK EIRP POWER FOR LTE BAND 66 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 1710.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3421.4	-53.54	4.02	29.80	-27.76	-13	-14.76	Horizontal
3421.4	-48.42	4.02	29.80	-22.64	-13	-9.64	Vertical
5132.1	-53.92	5.24	35.84	-23.32	-13	-10.32	Vertical
5132.1	-53.22	5.24	35.84	-22.62	-13	-9.62	Horizontal
112.6	-47.99	1.52	15.57	-33.94	-13	-20.94	Vertical
220.5	-49.54	1.33	17.14	-33.73	-13	-20.73	Horizontal
Test Results for Mid Channel 1745MHz							
3490.0	-45.66	4.03	30.00	-19.69	-13	-6.69	Horizontal
3490.0	-54.23	4.03	30.00	-28.26	-13	-15.26	Vertical
5235.0	-53.02	5.25	35.86	-22.41	-13	-9.41	Vertical
5235.0	-53.96	5.25	35.86	-23.35	-13	-10.35	Horizontal
157.3	-49.17	1.53	17.13	-33.57	-13	-20.57	Vertical
213.1	-49.36	1.41	15.95	-34.82	-13	-21.82	Horizontal
Test Results for High Channel 1779.3MHz							
3558.6	-44.15	4.05	30.01	-18.19	-13	-5.19	Horizontal
3558.6	-51.37	4.05	30.01	-25.41	-13	-12.41	Vertical
5337.9	-54.98	5.26	35.86	-24.38	-13	-11.38	Vertical
5337.9	-53.15	5.26	35.86	-22.55	-13	-9.55	Horizontal
170.6	-48.52	1.44	15.51	-34.45	-13	-21.45	Vertical
169.0	-52.90	1.78	15.76	-38.92	-13	-25.92	Horizontal

QPSK EIRP POWER FOR LTE BAND 66 (20MHZ BANDWIDTH)

Test Results for Low Channel 1720MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3440.0	-53.46	4.02	29.80	-27.68	-13	-14.68	Horizontal
3440.0	-52.49	4.02	29.80	-26.71	-13	-13.71	Vertical
5160.0	-54.65	5.24	35.84	-24.05	-13	-11.05	Vertical
5160.0	-54.67	5.24	35.84	-24.07	-13	-11.07	Horizontal
268.8	-50.75	1.62	17.02	-35.35	-13	-22.35	Vertical
161.4	-50.18	1.32	17.31	-34.19	-13	-21.19	Horizontal
Test Results for Mid Channel 1745MHz							
3490.0	-45.29	4.03	30.00	-19.32	-13	-6.32	Horizontal
3490.0	-46.29	4.03	30.00	-20.32	-13	-7.32	Vertical
5235.0	-50.51	5.25	35.86	-19.90	-13	-6.90	Vertical
5235.0	-47.51	5.25	35.86	-16.90	-13	-3.90	Horizontal
159.9	-46.05	1.45	15.17	-32.33	-13	-19.33	Vertical
172.1	-52.79	1.48	17.82	-36.45	-13	-23.45	Horizontal
Test Results for High Channel 1770MHz							
3540.0	-45.25	2.91	27.68	-20.48	-13	-7.48	Horizontal
3540.0	-53.80	2.91	27.68	-29.03	-13	-16.03	Vertical
5310.0	-51.19	5.26	35.86	-20.59	-13	-7.59	Vertical
5310.0	-54.26	5.26	35.86	-23.66	-13	-10.66	Horizontal
197.3	-45.85	1.76	16.38	-31.23	-13	-18.23	Vertical
158.5	-53.78	1.43	17.13	-38.08	-13	-25.08	Horizontal

Note: $P_{Mea}(dBm) = Power(dBm) + AR_{pl}(dBm)$

Over Limit = : $P_{Mea}(dBm) - Limit(dBm)$

We test both H direction and V direction, recorded worst case direction.

Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

10. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235, §27.54

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE

Use CMW 500 with Frequency Error measurement capability.

- ☐ Temp. = -30° to $+50^{\circ}\text{C}$
- ☐ Voltage = low voltage, DC 34V, Normal, DC 3.8V and High voltage, DC 4.2V.

Frequency Stability vs Temperature:

The EUT is placed inside a temperature chamber. The temperature is set to -30°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until $+50^{\circ}\text{C}$ is reached.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

MODES TESTED

- ☐ LTE Band2
LTE Band 4
- ☐ LTE Band5
LTE Band 7
LTE Band 12
LTE Band 17
LTE Band 66

RESULTS

See the following pages.

10.1 LTE BAND 2

Band 2 QPSK, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	1880	13.2	0.007008	2.5
3.8	1880	14.0	0.007455	2.5
4.2	1880	13.1	0.006991	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	1880	12.7	0.006733	2.5
Extreme (50C)	1880	12.0	0.006395	2.5
Extreme (40C)	1880	13.9	0.007403	2.5
Extreme (30C)	1880	13.9	0.007412	2.5
Extreme (10C)	1880	14.1	0.007526	2.5
Extreme (0C)	1880	11.7	0.006247	2.5
Extreme (-10C)	1880	12.8	0.006796	2.5
Extreme (-20C)	1880	14.2	0.007530	2.5
Extreme (-30C)	1880	14.5	0.007709	2.5

Band 2 16QAM, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	1880	9.6	0.005096	2.5
3.8	1880	9.1	0.004831	2.5
4.2	1880	7.6	0.004048	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	1880	9.7	0.005184	2.5
Extreme (50C)	1880	8.9	0.004760	2.5
Extreme (40C)	1880	8.2	0.004387	2.5
Extreme (30C)	1880	8.6	0.004600	2.5
Extreme (10C)	1880	9.4	0.004997	2.5
Extreme (0C)	1880	7.7	0.004096	2.5
Extreme (-10C)	1880	8.9	0.004729	2.5
Extreme (-20C)	1880	9.2	0.004878	2.5
Extreme (-30C)	1880	8.1	0.004325	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.2 LTE BAND 4

Band 4 QPSK, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	1732.5	8.5	0.004931	2.5
3.8	1732.5	8.9	0.005121	2.5
4.2	1732.5	8.7	0.005029	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	1732.5	8.8	0.005065	2.5
Extreme (50C)	1732.5	8.8	0.005094	2.5
Extreme (40C)	1732.5	7.7	0.004422	2.5
Extreme (30C)	1732.5	5.4	0.003134	2.5
Extreme (10C)	1732.5	6.8	0.003923	2.5
Extreme (0C)	1732.5	9.1	0.005253	2.5
Extreme (-10C)	1732.5	8.3	0.004799	2.5
Extreme (-20C)	1732.5	6.8	0.003951	2.5
Extreme (-30C)	1732.5	8.8	0.005106	2.5

Band 4 16QAM, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	1732.5	9.8	0.005676	2.5
3.8	1732.5	8.5	0.004911	2.5
4.2	1732.5	8.0	0.004623	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	1732.5	9.3	0.005367	2.5
Extreme (50C)	1732.5	9.3	0.005395	2.5
Extreme (40C)	1732.5	7.8	0.004493	2.5
Extreme (30C)	1732.5	8.8	0.005053	2.5
Extreme (10C)	1732.5	8.8	0.005072	2.5
Extreme (0C)	1732.5	8.0	0.004643	2.5
Extreme (-10C)	1732.5	8.6	0.004970	2.5
Extreme (-20C)	1732.5	9.0	0.005188	2.5
Extreme (-30C)	1732.5	7.9	0.004577	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.3 LTE BAND 5

Band 5 QPSK, (10MHz BANDWIDTH RB size 50 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	836.5	6.2	0.007464	2.5
3.8	836.5	6.2	0.007458	2.5
4.2	836.5	5.2	0.006206	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	836.5	5.7	0.006778	2.5
Extreme (50C)	836.5	6.0	0.007133	2.5
Extreme (40C)	836.5	6.3	0.007543	2.5
Extreme (30C)	836.5	6.9	0.008215	2.5
Extreme (10C)	836.5	5.5	0.006582	2.5
Extreme (0C)	836.5	5.3	0.006351	2.5
Extreme (-10C)	836.5	5.8	0.006905	2.5
Extreme (-20C)	836.5	6.0	0.007120	2.5
Extreme (-30C)	836.5	6.0	0.007147	2.5

Band 5 16QAM, (10MHz BANDWIDTH RB size 50 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	836.5	6.3	0.007482	2.5
3.8	836.5	7.0	0.008366	2.5
4.2	836.5	4.4	0.005286	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	836.5	6.3	0.007571	2.5
Extreme (50C)	836.5	6.4	0.007602	2.5
Extreme (40C)	836.5	6.4	0.007681	2.5
Extreme (30C)	836.5	6.6	0.007885	2.5
Extreme (10C)	836.5	5.7	0.006797	2.5
Extreme (0C)	836.5	5.7	0.006784	2.5
Extreme (-10C)	836.5	5.6	0.006738	2.5
Extreme (-20C)	836.5	6.1	0.007328	2.5
Extreme (-30C)	836.5	6.2	0.007384	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.4 LTE BAND 7

Band 7 QPSK, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	2535	9.9	0.003911	2.5
3.8	2535	9.2	0.003647	2.5
4.2	2535	8.4	0.003312	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	2535	9.7	0.003829	2.5
Extreme (50C)	2535	8.8	0.003484	2.5
Extreme (40C)	2535	8.1	0.003215	2.5
Extreme (30C)	2535	9.3	0.003665	2.5
Extreme (10C)	2535	8.1	0.003193	2.5
Extreme (0C)	2535	8.0	0.003148	2.5
Extreme (-10C)	2535	9.2	0.003641	2.5
Extreme (-20C)	2535	8.8	0.003470	2.5
Extreme (-30C)	2535	8.5	0.003370	2.5

Band 7 16QAM, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	2535	6.9	0.002722	2.5
3.8	2535	6.2	0.002442	2.5
4.2	2535	5.8	0.002298	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	2535	6.9	0.002722	2.5
Extreme (50C)	2535	5.6	0.002224	2.5
Extreme (40C)	2535	5.8	0.002281	2.5
Extreme (30C)	2535	7.1	0.002815	2.5
Extreme (10C)	2535	5.6	0.002209	2.5
Extreme (0C)	2535	5.1	0.002026	2.5
Extreme (-10C)	2535	4.7	0.001856	2.5
Extreme (-20C)	2535	6.0	0.002371	2.5
Extreme (-30C)	2535	5.8	0.002274	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.5 LTE BAND 12

Band 12 QPSK, (10MHz BANDWIDTH RB size 50 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	707.5	8.8	0.012466	2.5
3.8	707.5	9.5	0.013448	2.5
4.2	707.5	8.5	0.011977	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	707.5	8.9	0.012551	2.5
Extreme (50C)	707.5	7.9	0.011215	2.5
Extreme (40C)	707.5	7.9	0.011157	2.5
Extreme (30C)	707.5	8.7	0.012364	2.5
Extreme (10C)	707.5	7.7	0.010902	2.5
Extreme (0C)	707.5	8.7	0.012289	2.5
Extreme (-10C)	707.5	8.0	0.011289	2.5
Extreme (-20C)	707.5	9.1	0.012828	2.5
Extreme (-30C)	707.5	7.5	0.010592	2.5

Band 12 16QAM, (10MHz BANDWIDTH RB size 50 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	707.5	7.4	0.010521	2.5
3.8	707.5	8.8	0.012425	2.5
4.2	707.5	7.4	0.010528	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	707.5	6.5	0.009175	2.5
Extreme (50C)	707.5	5.5	0.007765	2.5
Extreme (40C)	707.5	6.4	0.009110	2.5
Extreme (30C)	707.5	-7.7	-0.010912	2.5
Extreme (10C)	707.5	-8.2	-0.011590	2.5
Extreme (0C)	707.5	2.9	0.004100	2.5
Extreme (-10C)	707.5	-5.2	-0.007292	2.5
Extreme (-20C)	707.5	-8.7	-0.012302	2.5
Extreme (-30C)	707.5	-10.2	-0.014350	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.6 LTE BAND 17

Band 17 QPSK, (10MHz BANDWIDTH RB size 50 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	710.0	9.9	0.013989	2.5
3.8	710.0	9.0	0.012649	2.5
4.2	710.0	7.7	0.010893	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	710.0	9.3	0.013126	2.5
Extreme (50C)	710.0	8.6	0.012061	2.5
Extreme (40C)	710.0	8.4	0.011877	2.5
Extreme (30C)	710.0	8.7	0.012218	2.5
Extreme (10C)	710.0	9.3	0.013069	2.5
Extreme (0C)	710.0	7.7	0.010775	2.5
Extreme (-10C)	710.0	9.0	0.012705	2.5
Extreme (-20C)	710.0	8.4	0.011841	2.5
Extreme (-30C)	710.0	7.9	0.011146	2.5

Band 17 16QAM, (10MHz BANDWIDTH RB size 50 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	710.0	9.8	0.013793	2.5
3.8	710.0	9.4	0.013219	2.5
4.2	710.0	8.7	0.012298	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	710.0	9.1	0.012837	2.5
Extreme (50C)	710.0	9.3	0.013114	2.5
Extreme (40C)	710.0	8.0	0.011247	2.5
Extreme (30C)	710.0	8.6	0.012159	2.5
Extreme (10C)	710.0	8.0	0.011214	2.5
Extreme (0C)	710.0	8.5	0.011924	2.5
Extreme (-10C)	710.0	9.2	0.012901	2.5
Extreme (-20C)	710.0	9.0	0.012645	2.5
Extreme (-30C)	710.0	8.6	0.012084	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.7 LTE BAND 66

QPSK, (20MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 66 QPSK, (CH 132322 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
3.4	1745	7.8	0.003915	2.5
3.8	1745	7.5	0.003812	2.5
4.2	1745	8.2	0.004172	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 66 QPSK, (CH 132322 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
Normal (25C)	1745	6.0	0.002985	2.5
Extreme (50C)	1745	7.9	0.004317	2.5
Extreme (40C)	1745	6.8	0.003454	2.5
Extreme (30C)	1745	7.7	0.003974	2.5
Extreme (10C)	1745	8.1	0.004509	2.5
Extreme (0C)	1745	6.1	0.003463	2.5
Extreme (-10C)	1745	6.6	0.003313	2.5
Extreme (-20C)	1745	7.5	0.003852	2.5
Extreme (-30C)	1745	6.0	0.003423	2.5

16QAM, (20MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 66 16QAM, (CH 132322 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
3.4	1745	8.7	0.004620	2.5
3.8	1745	8.6	0.004436	2.5
4.2	1745	9.4	0.005194	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 66 16QAM, (CH 132322 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
Normal (25C)	1745	9.6	0.005061	2.5
Extreme (50C)	1745	8.7	0.004447	2.5
Extreme (40C)	1745	9.1	0.004757	2.5
Extreme (30C)	1745	7.9	0.004539	2.5
Extreme (10C)	1745	8.5	0.004636	2.5
Extreme (0C)	1745	6.8	0.003824	2.5
Extreme (-10C)	1745	8.6	0.004745	2.5
Extreme (-20C)	1745	8.9	0.004918	2.5
Extreme (-30C)	1745	6.0	0.003037	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

11. Peak-to-Average Ratio

11.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


11.2 Measuring Instruments

See list of measuring instruments of this test report.

11.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. For LTE operating modes:
 - a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
 - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.

11.4 Test Setup

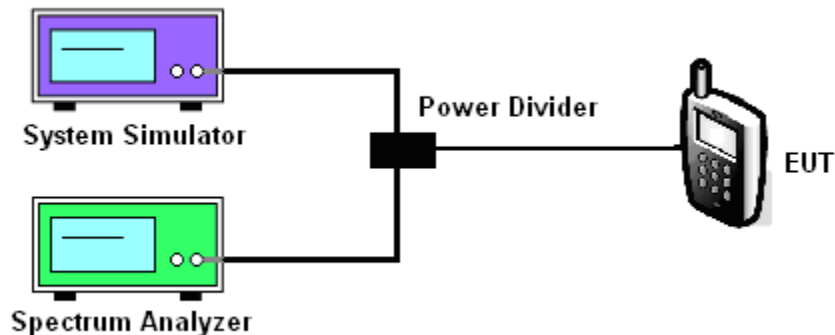

MODES TESTED

- ☒ LTE Band 2/4/5/7/12/17/66
☐

Test data reference attachment.

-----END OF REPORT-----