

 MOTOROLA SOLUTIONS	    CERTIFICATE 2518.08 SAMM 825																																
MOTOROLA PENANG ADV. COMM. LABORATORY Motorola Solutions Malaysia SDN BHD, Plot 2A, Medan Bayan Lepas, Mukim 12 S.W.D, 11900 Bayan Lepas, Penang, Malaysia.	FCC/ISED TEST REPORT Report Revision : Rev.C																																
<table><tr><td>Date/s Tested</td><td>: 17-NOV-2021 - 23-NOV-2021</td></tr><tr><td>Report Issue Date</td><td>: 28-Mar-2023</td></tr><tr><td>Manufacturer</td><td>: Motorola Solutions Malaysia SDN BHD</td></tr><tr><td>Manufacturer Address</td><td>: Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia</td></tr><tr><td>Requestor</td><td>: TEE KHOON YEAP</td></tr><tr><td>Product Type</td><td>: Hand-held</td></tr><tr><td>Product Version (PMN)</td><td>: MXP600</td></tr><tr><td>Model Number (HVIN)</td><td>: AZH77PCN6TZ5AN</td></tr><tr><td>Frequency Band</td><td>: 350-470MHz</td></tr><tr><td>Max RF Output Power</td><td>: 3 Watts</td></tr><tr><td>Applicant Name</td><td>: Motorola Solutions Inc</td></tr><tr><td>Applicant Address</td><td>: 8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322</td></tr><tr><td>ISED Registrations</td><td>: MY0001</td></tr><tr><td>FCC Registrations</td><td>: 461337</td></tr><tr><td>Firmware Version (FVIN)</td><td>: D55.000.9681</td></tr></table> The equipment was tested accordance to the requirement listed below: <table><tr><td>(LMR) FCC 47 CFR Part 90 ISED RSS- 119 Issue 12</td><td>PASS</td></tr></table>		Date/s Tested	: 17-NOV-2021 - 23-NOV-2021	Report Issue Date	: 28-Mar-2023	Manufacturer	: Motorola Solutions Malaysia SDN BHD	Manufacturer Address	: Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia	Requestor	: TEE KHOON YEAP	Product Type	: Hand-held	Product Version (PMN)	: MXP600	Model Number (HVIN)	: AZH77PCN6TZ5AN	Frequency Band	: 350-470MHz	Max RF Output Power	: 3 Watts	Applicant Name	: Motorola Solutions Inc	Applicant Address	: 8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322	ISED Registrations	: MY0001	FCC Registrations	: 461337	Firmware Version (FVIN)	: D55.000.9681	(LMR) FCC 47 CFR Part 90 ISED RSS- 119 Issue 12	PASS
Date/s Tested	: 17-NOV-2021 - 23-NOV-2021																																
Report Issue Date	: 28-Mar-2023																																
Manufacturer	: Motorola Solutions Malaysia SDN BHD																																
Manufacturer Address	: Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia																																
Requestor	: TEE KHOON YEAP																																
Product Type	: Hand-held																																
Product Version (PMN)	: MXP600																																
Model Number (HVIN)	: AZH77PCN6TZ5AN																																
Frequency Band	: 350-470MHz																																
Max RF Output Power	: 3 Watts																																
Applicant Name	: Motorola Solutions Inc																																
Applicant Address	: 8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322																																
ISED Registrations	: MY0001																																
FCC Registrations	: 461337																																
Firmware Version (FVIN)	: D55.000.9681																																
(LMR) FCC 47 CFR Part 90 ISED RSS- 119 Issue 12	PASS																																
This report shall not be reproduced without written approval from an officially designated representative of the Motorola Penang Adv. Comm. Laboratory. The results and statements contained in this report pertain only to the device(s) evaluated.																																	
Prepared By:  Muhammad Hazim Test Personnel	Approved Signatory:  Soon Oi May Responsible Engineer																																

Table of Contents

Report Revision History	3
1.0 General Information.....	4
2.0 Summary of Test Results	5
3.0 Measurement Uncertainty	6
4.0 Equipment List.....	7
5.0 Test Condition.....	10
5.1. Transmitter Test Conditions	10
6.0 Transmitter Test Parameters	11
6.1. RF Output Power	11
6.1.1. Test Setup.....	11
6.1.2. Test Result	11
6.2. Frequency Stability	12
6.2.1. Test Setup.....	12
6.2.2. Test Result	13
6.2.3. Test Limit.....	16
6.3. Audio Frequency Response	17
6.3.1. Test Setup.....	17
6.3.2. Test Result	17
6.3.3. Test Limit.....	17
6.4. Audio Low Pass Filter Response	18
6.4.1. Test Setup.....	18
6.4.2. Test Result	18
6.4.3. Test Limit.....	19
6.5. Modulation Limiting	20
6.5.1. Test Setup.....	20
6.5.2. Test Result	20
6.5.3. Test Limit.....	20
6.6. Occupied Bandwidth.....	21
6.6.1. Test Setup (Analog)	21
6.6.2. Test Result (Analog).....	21
6.6.3. Test Setup (Digital).....	22
6.6.4. Test Result (Digital).....	23
6.6.5. Test Limit.....	26
6.7. Band Edge Conducted Spurious Emission (Part 22)	27
6.7.1. Test Setup (Analog)	27
6.7.2. Test Result (Analog).....	27
6.7.3. Test Setup (Digital).....	28
6.7.4. Test Result (Digital).....	28
6.7.5. Test Limit.....	28
6.8. Transient Frequency Behavior.....	29
6.8.1. Test Setup.....	29
6.8.2. Test Result	30
6.8.3. Test Limit.....	32

6.9.	Adjacent Channel Power.....	33
6.9.1.	Test Setup (Analog)	33
6.9.2.	Test Result	33
6.9.3.	Test Setup (Digital).....	34
6.9.4.	Test Result	35
6.9.5.	Test Limit.....	37
6.10.	Conducted Spurious Emission	39
6.10.1.	Test Setup.....	39
6.10.2.	Test Result (Analog)	39
6.10.3.	Test Result (Digital).....	40
6.10.4.	Test Limit.....	52
6.11.	Radiated Spurious Emission	53
6.11.1.	Test Setup.....	53
6.11.2.	Test Result (Analog)	53
6.11.3.	Test Result (Digital).....	54
6.11.4.	Test Limit.....	60
6.12.	Effective Radiated Power (ERP)	61
6.12.1.	Test Setup.....	61
6.12.2.	Test Result	61
6.12.3.	Test Limit.....	61
6.13.	GNSS (EIRP for 1559 - 1610MHz).....	61
6.13.1.	Test Setup.....	62
6.13.1.	Test Result	62
6.13.2.	Test Limit.....	62

Report Revision History

Revision History	Description	Date	Originator
Rev. A	Initial Report	27-Jan-2022	Putri
Rev. B	Added Note statement in section 2.0	16-Jun-2022	Putri
Rev. C	Updated SAMM logo, removed FCC rules part in section 2.0 OBW, remove the not applicable frequency channels for Adjacent Channel Power in section 5.1, added Note2 in section 6.6.3, added statement of “Not for FCC review” in section 6.6.4 for all the spectrum and removed the not applicable mask, updated spec for section 6.9.4	28-Mar-2023	Hazim

1.0 General Information

EUT Description:

Technologies	Land Mobile Radio (LMR)
Modulation Type	π / 4DQPSK

The EUT contains following accessory devices and data cable:

Item	Brand	Model or P/N
BATT LION IMPRES 2 IP68 3400T	MOTOROLA	PMNN4802A

General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, the EUT is to comply with the requirements of the following standards:

ANSI C63.26-2015

No modifications were done to the UUT to facilitate the tests in this report.

Deviation from standard

Not applicable as no deviation from standard test method

Antenna gain disclaimer

Antenna gain information is provided by customer. The validity of the results is dependent upon this information. The lab will not be held accountable in the event the supplied information affects compliance.

Test configuration of EUT

All relevant configurations involving radio models and accessories (including chargers, batteries, and antennas) were assessed. Only worst case configurations will be included in this report.

2.0 Summary of Test Results

FCC General Rules Part (47CFR)	ISED General Rules Part	Test Item	Result	Remarks	Serial number tested
Part 90	RSS-119	RF Power Output	Pass		767TXV0828
Part 90	RSS-119	Frequency Stability	Pass	*See Note	767TXV0828
-	-	Audio Frequency Response	NA		
-	-	Audio Low Pass Filter Response	NA		
-	-	Modulation limiting	NA		
-	RSS-119	Occupied Bandwidth	Pass	22K0D1E/D/W- 20.4179 kHz	767TXV0828
-	-	Band Edge Conducted Spurious Emission	NA		
Part 90	RSS-119	Transient Frequency Behavior	Pass		767TXV0828
Part 90	-	Adjacent Channel Power	Pass		767TXV0828
Part 90	RSS-119	Conducted Spurious Emissions	Pass	Worst case – -29.56dBm	767TXV0828
Part 90	RSS-119	Radiated Spurious Emission	Pass	Worst case Emission – -36.83dBm Margin – -23.83dBm	767TXV0821
-	-	GNSS (EIRP for 1559 – 1610MHz)	NA		
-	-	Effective Radiated Power (ERP)	NA		

NA → Not Applicable

***Note:** A reference voltage controlled temperature compensated crystal oscillator (VCTCXO) operating at 19.2MHz acts as the master reference for both synthesizers and the radio control system. Inherent frequency stability of the VCTCXO is better than 1 part per million (ppm). During trunked network operation this reference is frequency locked to the received base station frequency.

In addition to this, the ETSI conformance standard EN 300 394-1 states that the product, when in trunked mode and therefore locked onto the base station carrier signal, shall be within +/-100Hz of this signal under normal test conditions.

The manufacturer confirms that during their conformance testing of this product type against the conformance standard the frequency error was within +/-100Hz of the base station carrier frequency, therefore well within specification limits.

3.0 Measurement Uncertainty

Measurement	Frequency	Expended Uncertainty (k=1.96) (±)
AC Power Line Conducted Spurious Emission	150KHz ~ 30MHz	3.48 dB
Radiated Emissions up to 1 GHz dB μ V/m (Field Strength)	30MHz ~ 1000MHz	5.88 dB
Radiated Emissions above 1 GHz dB μ V/m (Field Strength)	1GHz ~ 18GHz	5.84 dB
	18GHz ~ 40GHz	6.02 dB
Radiated Emissions dBm (ERP/EiRP)	30MHz ~ 18GHz	4.03 dB
Conducted Spurious Emissions	9kHz ~ 12.75GHz	2.82 dB
Frequency Stability	9kHz ~ 12.75GHz	0.0085 ppm
Audio Frequency Response / Low Pass Filter Response	300Hz – 20kHz	4.09 %
Modulation Limiting	300Hz – 3kHz	1.15 %
Occupied Bandwidth	9kHz ~ 12.75GHz	2.82 dB
Band Edge Conducted Spurious Emission	9kHz ~ 12.75GHz	2.82 dB
Transient Frequency Behavior	9kHz ~ 12.75GHz	5.4 ms
Adjacent Channel Power	9kHz ~ 12.75GHz	2.82 dB

4.0 Equipment List

FCC Analog ATE#1: (SW version: 2.4.6 & FCC_Frequency Stability 1.0.3 rev.)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
CHAMBER	SH-641	92009188	08-Mar-21	08-Mar-22
SWITCH CONTROL SYSTEM	3499B	CN40150337	CNR	CNR
POWER SENSOR	E4412A	MY50290007	15-Dec-20	15-Dec-21
POWER SUPPLY	6032A	3232A08203	14-Jun-21	14-Jun-22
POWER METER	E4416A	GB41293240	14-Mar-21	14-Mar-22
SIGNAL GENERATOR	2042	203002/747	23-Feb-21	23-Feb-22
ANALYZER SIGNAL (DYNAMIC)	35670A	MY42506847	17-Sep-21	17-Sep-22
MODULATION ANALYZER	8901B	3403A04974	06-Sep-21	06-Sep-22
N to N RF Cable # 1	M17/128-RG400	NA	NA	NA
BNC to N RF Cable # 1	RG 58	NA	NA	NA
BNC to BNC RF Cable # 1	RG 58	NA	NA	NA
BNC to BNC RF Cable # 2	RG 58	NA	NA	NA
BNC to BNC RF Cable # 3	RG 58	NA	NA	NA
BNC to BNC RF Cable # 4	RG 58	NA	NA	NA
BNC to BNC RF Cable # 5	RG 58	NA	NA	NA
BNC to BNC RF Cable # 6	RG 58	NA	NA	NA
BNC to BNC RF Cable # 7	RG 58	NA	NA	NA
N to SMA RF Cable # 1	RG 58	NA	NA	NA
N to SMA RF Cable # 2	RG 58	NA	NA	NA
N to SMA RF Cable # 3	RG 58	NA	NA	NA
Aeroflex Attenuator 30dB	49-30-34-LIM	NA	NA	NA

FCC Transient ATE #1: (SW version: FCC Transient ATE_R1.1.3)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
SWITCH CONTROL UNIT	3488A	2719A36210	CNR	CNR
ATTENUATOR / SWITCH DRIVER	11713A	2508A10141	CNR	CNR
POWER SENSOR	E9301B	MY41495393	15-May-21	15-May-22
SIGNAL GENERATOR	8657A	3039A02769	11-Jun-21	11-Jun-22
AUDIO ANALYZER	8903B	3011A10318	01-Nov-21	01-Nov-22
POWER METER	E4418B	MY45104923	20-Feb-21	20-Feb-22
STEP ATTENUATOR	8494G	MY52300967	17-Jun-21	17-Jun-22
POWER SUPPLY	6033A	3004A04987	08-Jul-21	08-Jul-22
ANALYZER SPECTRUM	E4445A	MY46181732	29-Jun-21	29-Jun-22
ATTENUATOR/110DB	8496G	MY52300176	22-Aug-21	22-Aug-22
AUDIO ANALYZER	8903B	3413A14586	13-Sep-21	13-Sep-22
ANALYZER MODULATION	8901B	2619A00845	30-Sep-21	30-Sep-22
AUDIO ANALYZER	8903B	3011A12488	13-Sep-21	13-Sep-22
N to N RF Cable # 1	SF126/11N/11N	NA	NA	NA
N to N RF Cable # 1	SF126/11N/11N	NA	NA	NA
N to N RF Cable # 2	M17/128-RG400	NA	NA	NA
N to N RF Cable # 3	M17/128-RG400	NA	NA	NA
N to N RF Cable # 4	M17/128-RG400	NA	NA	NA
N to N RF Cable # 5	M17/128-RG400	NA	NA	NA
N to N RF Cable # 6	M17/128-RG400	NA	NA	NA
N to N RF Cable # 7	M17/128-RG400	NA	NA	NA
N to N RF Cable # 8	M17/128-RG400	NA	NA	NA
N to N RF Cable # 9	M17/128-RG400	NA	NA	NA
BNC to BNC RF Cable # 1	RG 58	NA	NA	NA
BNC to BNC RF Cable # 2	RG 58	NA	NA	NA
BNC to BNC RF Cable # 3	RG 58	NA	NA	NA
BNC to BNC RF Cable # 4	RG 58	NA	NA	NA
BNC to BNC RF Cable # 5	RG 58	NA	NA	NA
BNC to BNC RF Cable # 6	RG 58	NA	NA	NA
BNC to N RF Cable # 1	RG 58	NA	NA	NA
Aeroflex Attenuator 10dB	49-10-43-LIM	NA	NA	NA
Aeroflex Attenuator 10dB	33-10-34-LIM	NA	NA	NA

FCC CONDUCTED SPUR EMISSION ATE # 1 (SW version: Conducted Spur ATE_rev 1.23.03)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
SWITCH CONTROL UNIT	3488A	2719A32735	CNR	CNR
ANALYZER SPECTRUM	E4440A	MY46185415	10-Jan-20	10-Jan-22
POWER SUPPLY	6031A	3221A02613	25-May-21	25-May-22
INTERFACE BOX - FILTER	CNR	CS001	06-Jul-21	06-Jul-22
N to N RF Cable # 1	SF126/11N/11N	NA	NA	NA
N to N RF Cable # 2	SF126/11N/11N	NA	NA	NA
BNC to BNC RF Cable # 1	RG 58	NA	NA	NA
Aeroflex Attenuator 30dB	49-30-43-LIM	NA	NA	NA
Aeroflex Attenuator 10dB	33-10-34-LIM	NA	NA	NA

Radiated Emission

Description	Model #	Serial Number	Calibration Date	Calibration Due Date
EMI TEST RECEIVER	ESIB40	100307	08-Jan-21	08-Jan-22
3m Semi-anechoic Chamber	NA	888032	No Cal. Req'd	No Cal. Req'd
TURNTABLE FLUSH MOUNT 2M	T-200-S	N/A	No Cal. Req'd	No Cal. Req'd
Bore sight Antenna mast	MBS-500	N/A	No Cal. Req'd	No Cal. Req'd
PROGRAMMING CONTROLLER	MF-7802BS	N/A	No Cal. Req'd	No Cal. Req'd
POWER SUPPLY (0-60V/0-50A, 1000W)	6032A	41001736	28-Jun-21	28-Jun-22
EMI TEST RECEIVER	ESW44	101731	23-Mar-21	23-Mar-22
DATA LOGGER	SDL500	A.016776	17-Jun-21	17-Jun-22
BILOG ANTENNA	CBL6112D	55546	16-Jun-21	16-Jun-22
BILOG ANTENNA	CBL6112B	2964	4-May-21	4-May-22
DRG HORN FREQ.	SAS-571	1143	24-Feb-21	24-Feb-23
DRG HORN FREQ.	SAS-571	719	13-Sep-21	13-Sep-22
PREAMPLIFIER	PAM-0118	427	13-May-20	13-May-23
SIGNAL GENERATOR	SMB100A	180683	13-Apr-21	13-Apr-24
LOOP ANTENNA	6502	00203479	05-Feb-21	05-Feb-22
BROAD-BAND HORN ANTENNA	BBHA9170	BBHA9170255	04-Feb-21	04-Feb-22
Test Software	EMC FCC IC Bluetooth RE Test			
Version	EMC FCC RE v1.6.3			

5.0 Test Condition

5.1 Transmitter Test Conditions

Test Item, (Channel Spacing)	Power (W)	Modulation	Test Frequency (MHz)	Tested By	Environmental conditions
RF Output Power	Max Mode1&2	π / 4DQPSK	406.125, 418.0125, 429.975, 450.025, 460.025, 469.9875	Putri	23.4°C, 50%RH
Frequency Stability	Max Mode2	π / 4DQPSK	418.0125, 460.025	Putri	25.1°C, 54.3%RH, 60.3°C, 50%RH, -30.1°C, 51.2%RH
Audio Frequency Response (12.5kHz / 25kHz)	Max	NA	NA		
Audio Low Pass Filter Response (12.5kHz / 25kHz)	Max	NA	NA		
Modulation limiting (12.5kHz / 25kHz)	Max	NA	NA		
Occupied Bandwidth (12.5kHz / 20kHz / 25kHz)	Max Mode2	π / 4DQPSK	406.125, 418.0125, 429.975, 450.025, 460.025, 469.9875	Putri	23.4°C, 50%RH
Band Edge Conducted Spurious Emissions (Part 22) (12.5kHz / 20kHz / 25kHz)	Max Mode2	NA	NA		
Transient Frequency Behavior (UHF & VHF Band) (12.5kHz / 25kHz)	Max Mode2	π / 4DQPSK	418.0125, 460.025	Putri	23.4°C, 50%RH
Adjacent Channel Power (700MHz Band) (12.5kHz / 25kHz)	Max Mode1&2	π / 4DQPSK	450.025, 460.025, 469.9875	Putri	23.4°C, 50%RH
Conducted Spurious Emissions- (12.5kHz / 25kHz)	Max Mode1&2	π / 4DQPSK	406.125, 418.0125, 429.975, 450.025, 460.025, 469.9875	Putri	23.4°C, 50%RH
Radiated Spurious Emission (12.5kHz / 25kHz)	Max Mode1	π / 4DQPSK	406.125, 418.0125, 429.975, 450.025, 460.025, 469.9875	Aiman	23.0°C 69.8%RH
GNSS (EIRP for 1559 - 1610MHz) (12.5kHz / 25kHz)	Max	NA	NA		
Effective Radiated Power (ERP) (12.5kHz / 25kHz)	Max	NA	NA		

NA → Not Applicable

Mode1: TXNDC test mode is transmit at max power (3W), duty cycle 100% which is the worst case mode.

Mode2: MSPD test mode is transmit at max power 2.51W, duty cycle 62.5%.


Mode3: SSPD test mode is transmit at max power 3W, duty cycle 22%.

*SSPD test mode is not cover in the testing as the testing is conducted in the worst case condition.

6.0 Transmitter Test Parameters

6.1. RF Output Power

6.1.1. Test Setup

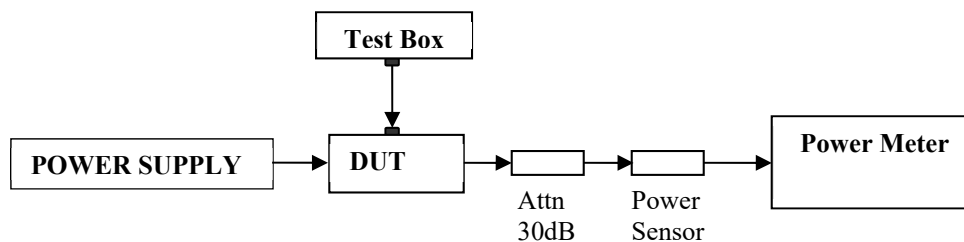

- 1) The DUT transmitter connected to Power Meter using the 30 dB attenuator and power sensor with above setup.
- 2) Path loss for the measurement included.
- 3) All the measurement was done at low, mid, high frequency for each band.
- 4) Record the power into the test report.

6.1.2. Test Result

MSPD


Temperature	25°C		
Voltage (V)	3.8V		
Frequency (MHz)	Max Power (W)	Current (A)	
406.12500	2.42	3.21	Not for FCC review
418.01250	2.39	3.09	Not for FCC review
429.97500	2.40	2.89	Not for FCC review
450.02500	2.47	2.94	
460.02500	2.45	2.91	
469.98750	2.45	2.97	

TXNDC

Temperature	25°C		
Voltage (V)	3.8V		
Frequency (MHz)	Max Power (W)	Current (A)	
406.12500	2.90	3.40	Not for FCC review
418.01250	2.93	3.38	Not for FCC review
429.97500	2.98	3.42	Not for FCC review
450.02500	2.98	3.40	
460.02500	2.97	3.38	
469.98750	2.96	3.38	

6.2. Frequency Stability

6.2.1. Test Setup

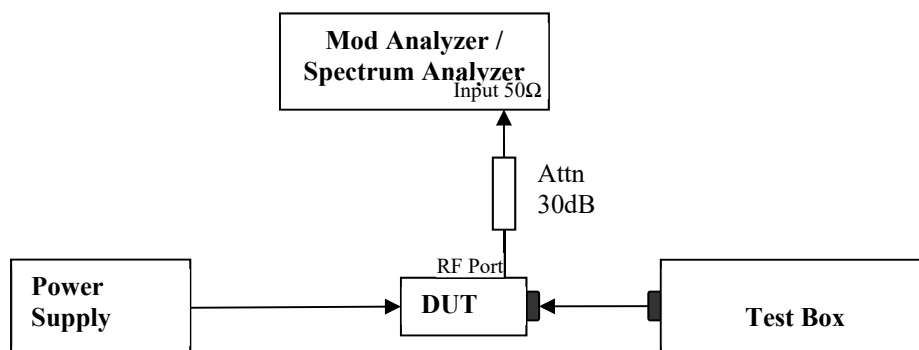


- 1) The DUT transmitter output port was connected to Modulation / Spectrum Analyzer.
- 2) Path loss for the measurement included.
- 3) Transmit the DUT and record the freq in MCF_{MHz} .
- 4) Test in 2 conditions:
 - Temperature: The frequency of the transmitter was measured from -30°C to 50°C.
 - Supply Voltage:
 - Mobile: The frequency of the transmitter was measured from 85% to 115% of the nominal operating input voltage.
 - Portable: The frequency of the transmitter was measured from nominal $\pm x\%$ as specified by the manufacturer
- 5) Calculate the ppm frequency error by the following:

$$ppm\ error = \left(\frac{MCF_{MHz}}{ACF_{MHz}} - 1 \right) * 10^6$$

Where: MCF_{MHz} is the Measured Carrier Frequency in MHz
 ACF_{MHz} is the Assigned Carrier Frequency in MHz

6.2.2. Test Result


Not for FCC review

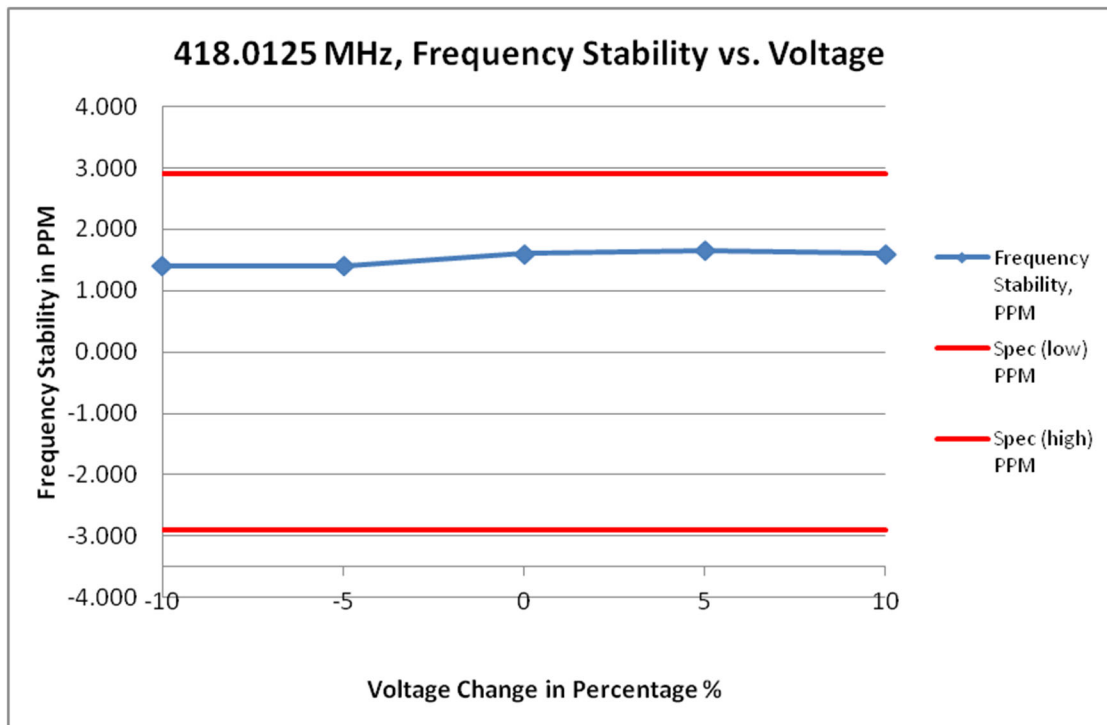

(i) Frequency Stability VS Voltage


Frequency / Channel Spacing	418.0125 MHz / 25.0 kHz				
Temperature, °C	25				
Voltage %	Voltage, V	Frequency, MHz	Frequency Stability, PPM	Spec (low) PPM	Spec (high) PPM
-10	3.420	418.013090	1.411	-2.900	2.900
-5	3.610	418.013090	1.411	-2.900	2.900
0	3.800	418.013170	1.603	-2.900	2.900
5	3.990	418.013190	1.651	-2.900	2.900
10	4.180	418.013170	1.603	-2.900	2.900

Not for FCC review

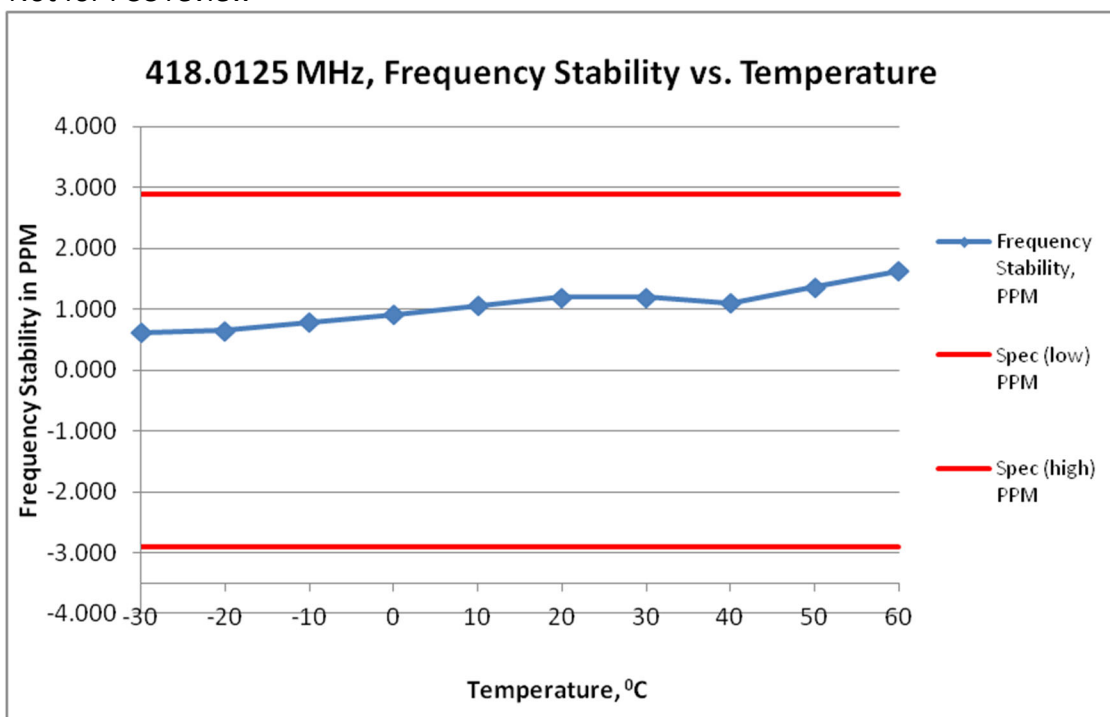


(ii) Frequency Stability VS temperature

Frequency / Channel Spacing	418.0125 MHz / 25.0 kHz			
Voltage, V	3.8			
Temperature, °C	Frequency, MHz	Frequency Stability, PPM	Spec (low) PPM	Spec (high) PPM
-30	418.012760	0.622	-2.900	2.900
-20	418.012770	0.646	-2.900	2.900
-10	418.012830	0.789	-2.900	2.900
0	418.012880	0.909	-2.900	2.900
10	418.012940	1.053	-2.900	2.900
20	418.013000	1.196	-2.900	2.900
30	418.013000	1.196	-2.900	2.900
40	418.012960	1.100	-2.900	2.900
50	418.013070	1.364	-2.900	2.900
60	418.013180	1.627	-2.900	2.900

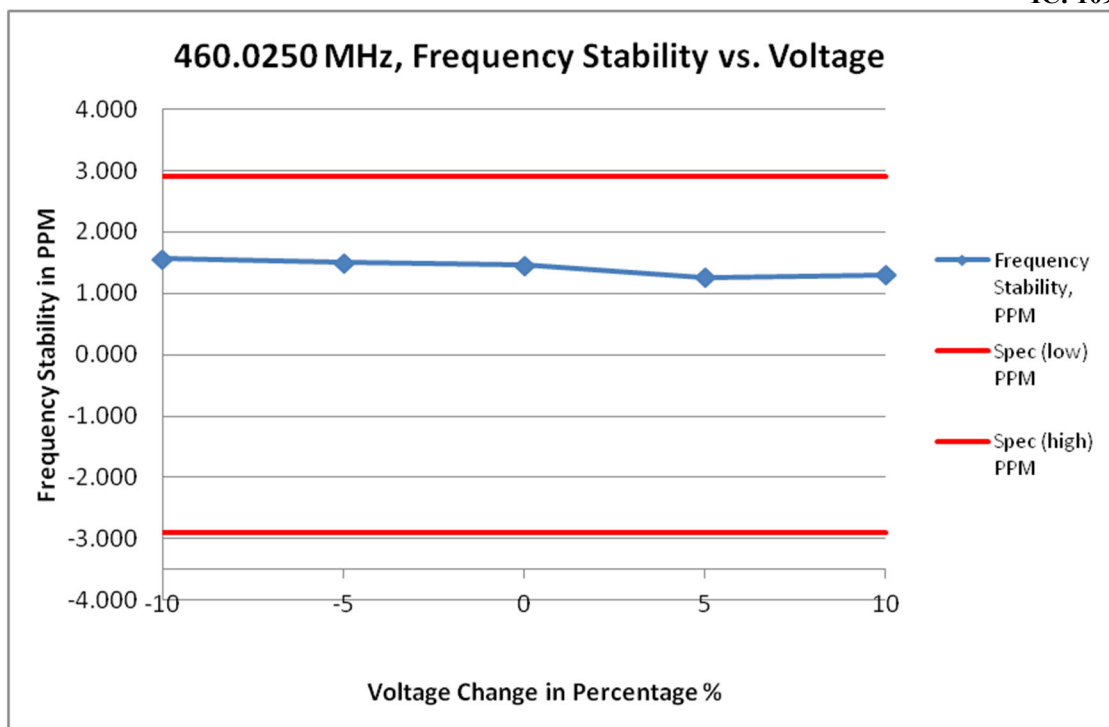

(i) Frequency Stability VS Voltage

Frequency / Channel Spacing	460.0250 MHz / 25.0 kHz				
Temperature, °C	25				
Voltage %	Voltage, V	Frequency, MHz	Frequency Stability, PPM	Spec (low) PPM	Spec (high) PPM
-10	3.420	460.025720	1.565	-2.900	2.900
-5	3.610	460.025690	1.500	-2.900	2.900
0	3.800	460.025670	1.456	-2.900	2.900
5	3.990	460.025580	1.261	-2.900	2.900
10	4.180	460.025600	1.304	-2.900	2.900

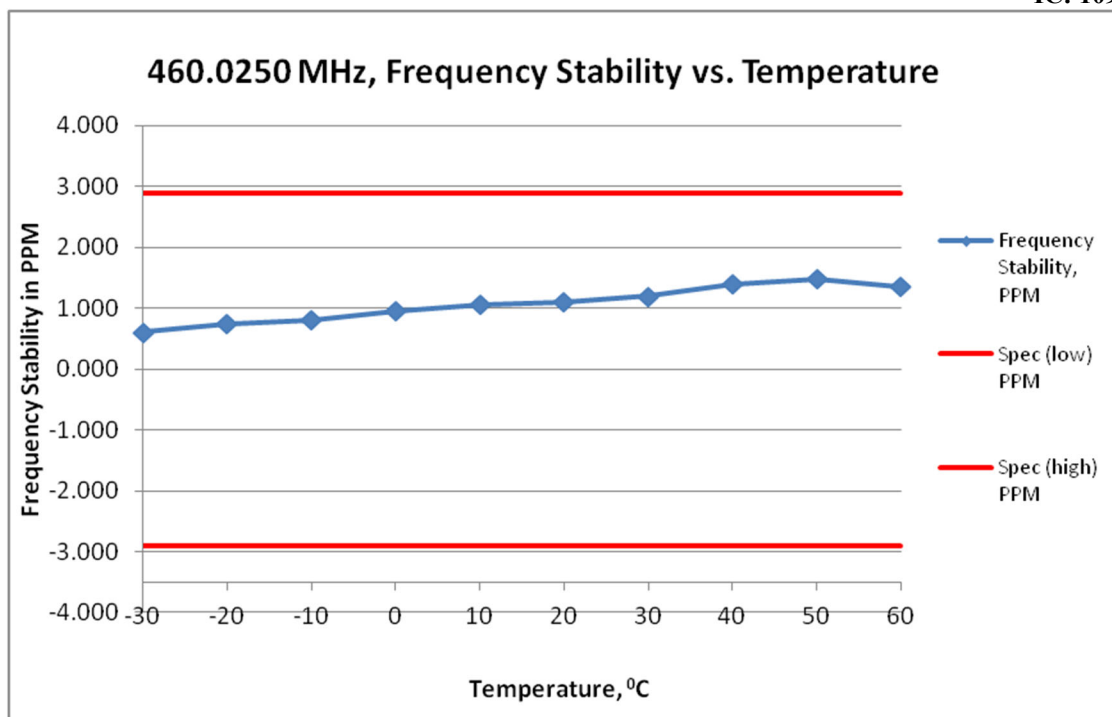

(ii) Frequency Stability VS temperature


Frequency / Channel Spacing	460.0250 MHz / 25.0 kHz			
Voltage, V	3.8			
Temperature, °C	Frequency, MHz	Frequency Stability, PPM	Spec (low) PPM	Spec (high) PPM
-30	460.025280	0.609	-2.900	2.900
-20	460.025340	0.739	-2.900	2.900
-10	460.025370	0.804	-2.900	2.900
0	460.025440	0.956	-2.900	2.900
10	460.025490	1.065	-2.900	2.900
20	460.025510	1.109	-2.900	2.900
30	460.025550	1.196	-2.900	2.900
40	460.025640	1.391	-2.900	2.900
50	460.025680	1.478	-2.900	2.900
60	460.025620	1.348	-2.900	2.900

6.2.3. Test Limit

As per manufacturer declared spec +/- 2.9ppm

6.3. Audio Frequency Response

6.3.1. Test Setup

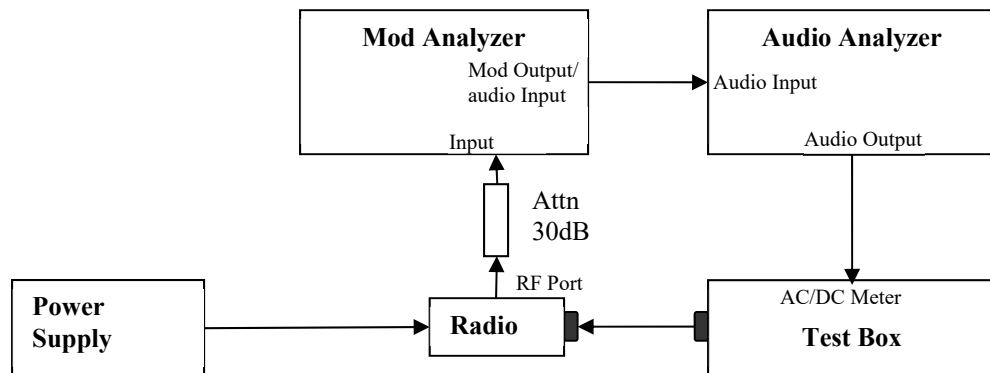


- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Set the audio bandwidth filter to 15 kHz and 50 kHz.
- 4) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 20% of the Full rated system deviation.
- 5) On audio analyzer, set the rated level as reference to zero.
- 6) Vary the audio frequency from 300 Hz to 3 kHz. Record the change in dB on the audio analyzer.

6.3.2. Test Result

Not Applicable.

6.3.3. Test Limit

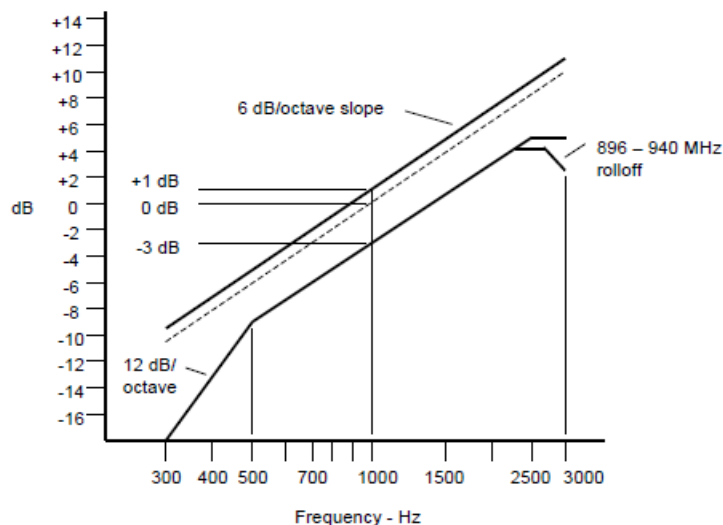


Note:

- o There are additional 6 dB per octave attenuation is allowed from 2.5KHz to 3KHz in equipment 25MHz to 869MHz radio.
- o Additional 6 dB per octave attenuation is allowed from 2.3KHz to 2.7KHz & additional 12 dB per octave attenuation is allowed from 2.7KHz to 3KHz in equipment 896MHz to 940MHz radio.

6.4. Audio Low Pass Filter Response

6.4.1. Test Setup

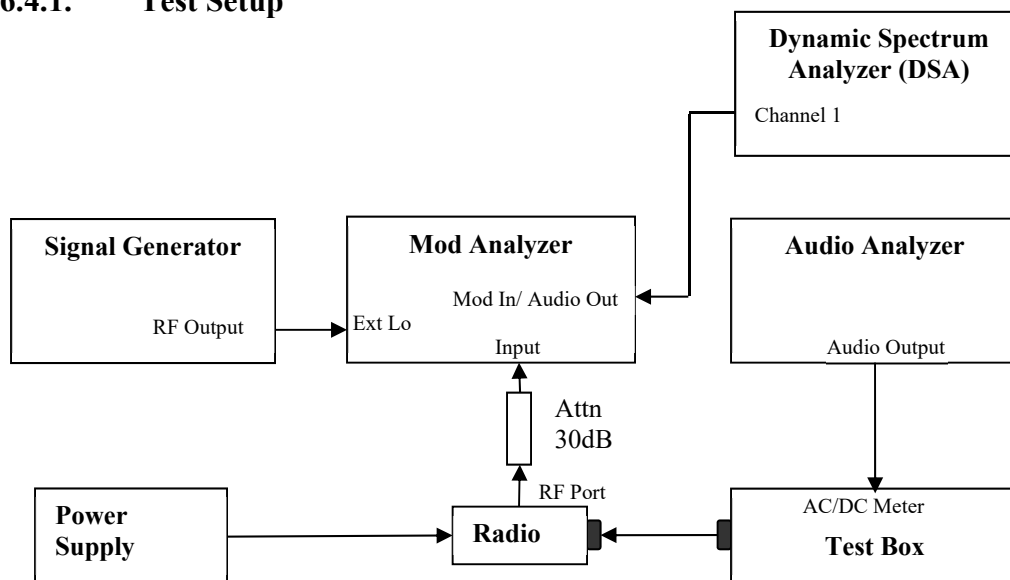


- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Press 23.1SPCL on modulation analyzer to enable the external LO from Sigen.
- 4) Set the Sigen frequency to $F_c + 1.5$ MHz, RF output level to 0dBm without modulation.
- 5) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 60% of the Full rated system deviation.
- 6) Up the amplitude by 20dB.
- 7) On DSA, get the reference point to 0dB.
- 8) Vary the frequency on audio analyzer from 3 kHz to 20 kHz, record the audio tone from DSA.

6.4.2. Test Result

Not Applicable.

6.4.3. Test Limit

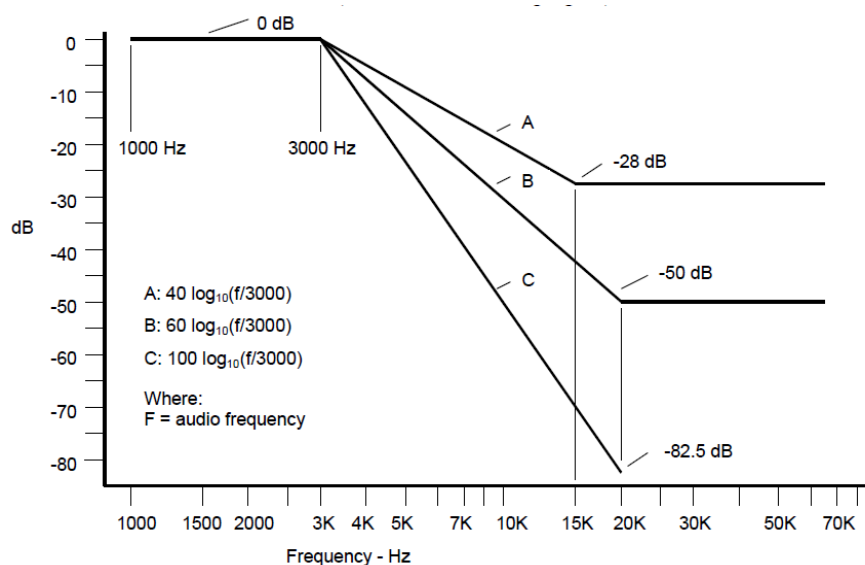

For audio frequencies above 3000 Hz, the audio response of the post limiter low-pass filter shall meet or exceed the following requirements:

- a) For equipment operating on 20, 25 or 30 kHz channel bandwidth in the 25 MHz to 174 MHz range:

At frequencies from 3000 Hz through 15,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least: $40 \log_{10}(f/3000)$ dB

where: f is the audio frequency in Hz.

At frequencies above 15,000 Hz, the attenuation shall be greater than the attenuation at 1000 Hz, by at least: 28 dB.

- b) For equipment operating with 25 kHz bandwidth channels between 406 and 512 MHz through 896 MHz, and between 929 MHz through 930 MHz:

At frequencies from 3000 Hz through 20,000 Hz, the attenuation shall be greater than the attenuation at 1000 Hz by at least: $60 \log_{10}(f/3000)$ dB

where: f is the audio frequency in Hz.

At frequencies above 20,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least: 50 dB.


- c) For equipment operating on channels between 896 MHz through 901 MHz, between 935 MHz through 940 MHz, and 12.5 or 15 kHz spaced channels in the frequency range 138-174 MHz and 406-512 MHz.

At frequencies from 3000 Hz through 20,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least: $100 \log_{10}(f/3000)$ dB

where: f is the audio frequency in Hz.

6.5. Modulation Limiting

6.5.1. Test Setup

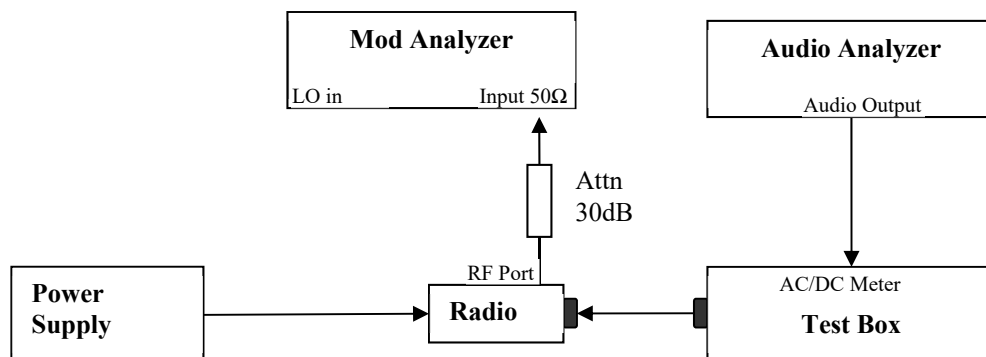

- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Set the audio bandwidth filter to 15 kHz.
- 4) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 60% of the Full rated system deviation.
- 5) Record the frequency deviation as 0dB input level at 1kHz audio frequency.
- 6) Repeat the step and record the frequency deviation from -20 dB to 20dB by 5 dB increments and different audio freq 300 Hz, 2.5 kHz and 3 kHz.

6.5.2. Test Result


Not Applicable.

6.5.3. Test Limit

Modulation Limiting shall not exceed 100 percent.

6.6. Occupied Bandwidth

6.6.1. Test Setup (Analog)

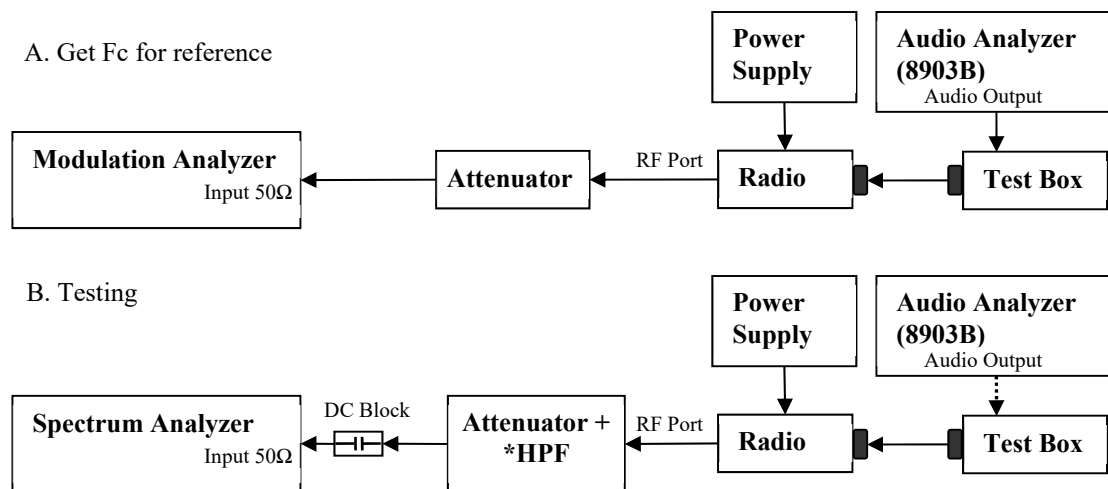

- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Set the audio bandwidth filter to 15 kHz low pass filter and 50 kHz high pass filter.
- 3) Transmit the radio and set the audio analyzer to 2.5 kHz audio frequency and 50% of the rated deviation. Up the amplitude by 16 dB. Dekey the DUT.
- 4) Path loss for the measurement included.
- 5) Select the Occupied Bandwidth measurement for 99% Emissions Bandwidth Measurement.
- 6) Key in the Fc and Resolution Bandwidth (1 ~ 5 % of emission designator).
- 7) Transmit the DUT and record the occupied Bandwidth frequency.
- 8) Preset the spectrum analyzer for sideband spectrum measurement.
- 9) Set the span and Resolution Bandwidth (according to FCC/ ISED standard).
- 10) Save the screen shot as modulated signal
- 11) Remove the audio tone from audio analyzer to capture unmodulated signal.


* Only HPF added for Mask 80.211 measurement with attenuator.

* 99% Bandwidth measurement is computed by the spectrum analyzer and is consistent with the C63.26 5.4.4 method.

6.6.2. Test Result (Analog)

Not Applicable.

6.6.3. Test Setup (Digital)

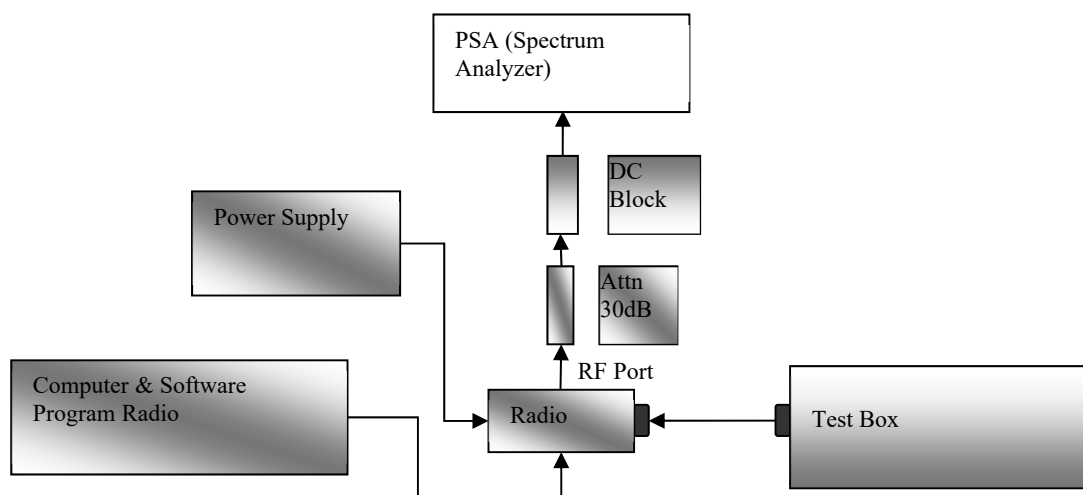

- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (*4FSK, C4FM or other digital modulation form).
- 2) Path loss for the measurement included.
- 3) Select the Occupied Bandwidth measurement for 99% Emissions Bandwidth Measurement.
- 4) Key in the Fc and Resolution Bandwidth (1 ~ 5 % of emission designator).
- 5) Transmit the DUT and record the occupied Bandwidth frequency.
- 6) Preset the spectrum analyzer for modulation emission spectrum measurement.
- 7) Set the span and Resolution Bandwidth (according to FCC/ ISED standard).
- 8) Capture the screen shot as modulated signal.

* 99% Bandwidth measurement is computed by the spectrum analyzer and is consistent with the C63.26 5.4.4 method.

*Note1 (For C4FM, FSK):

- For Digital Modulation, 12.5 kHz Data F1D & FXD would be the same. Therefore only measurements with F1D modulation shown below.
- For Digital Modulation, 12.5 kHz Data F1E & FXE would be the same. Therefore only measurements with F1E modulation shown below.

*Note2 (For $\pi/4$ DQPSK, QAM):

- For Digital Modulation, 25 kHz Data D1D, D1E & D1W would be the same. Therefore only measurements with D1W modulation shown below.


6.6.4. Test Result (Digital)

Digital (12.5 kHz Channelization, Digital Voice):
 Emission Designator 22K0D1D/E/W


The 99% energy rule (title 47CFR 2.989) was used for digital mode and is more accurate than Carson's rule. It basically states that 99% of the modulation energy falls within X kHz, in this case, 22kHz. D1D/E/W portion of the designator indicates digital voice/data/voice+data.

Therefore, the entire designator for 25 kHz channelization digital voice is 22K0D1D/E/W.


Not for FCC review

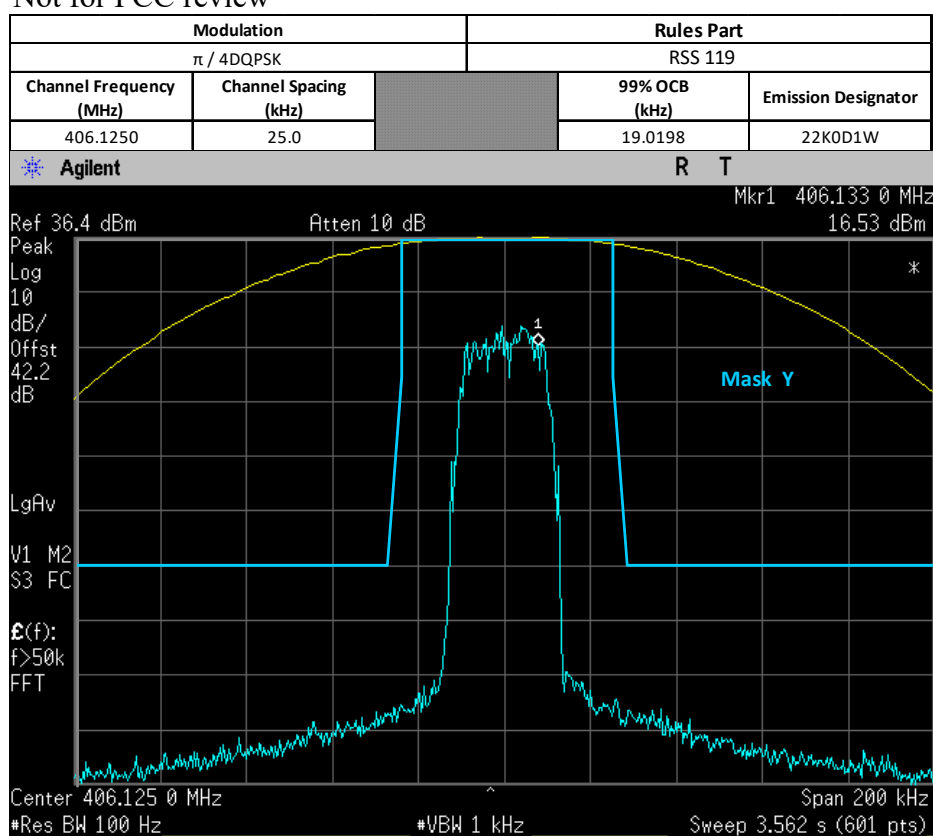


Not for FCC review

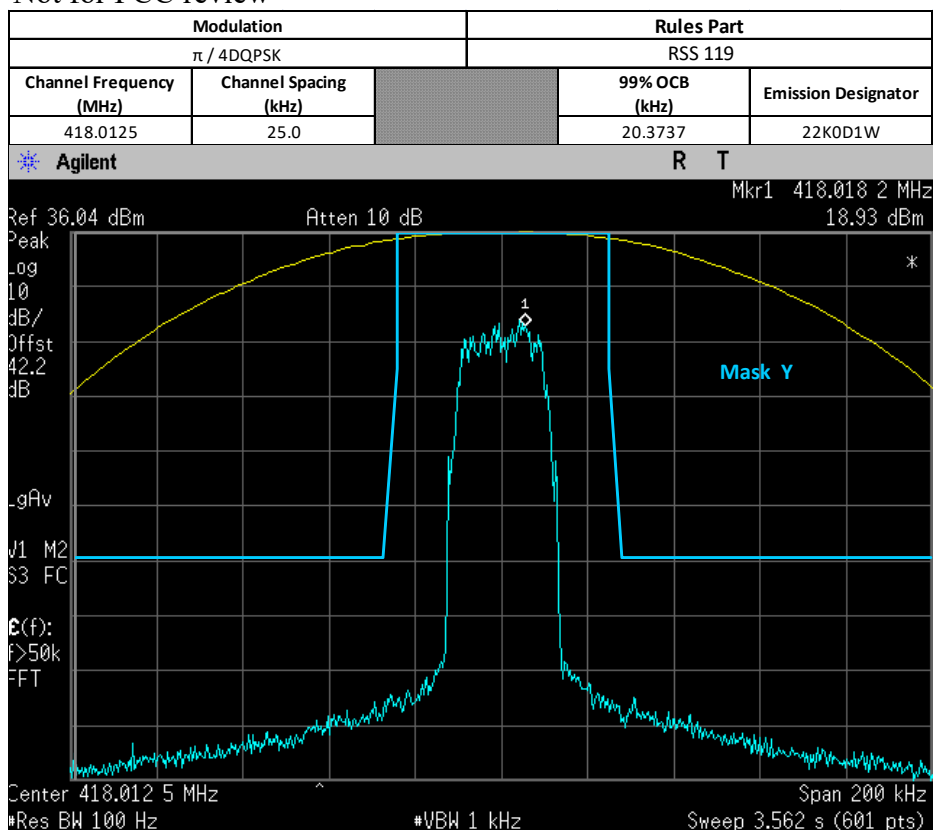


Not for FCC review

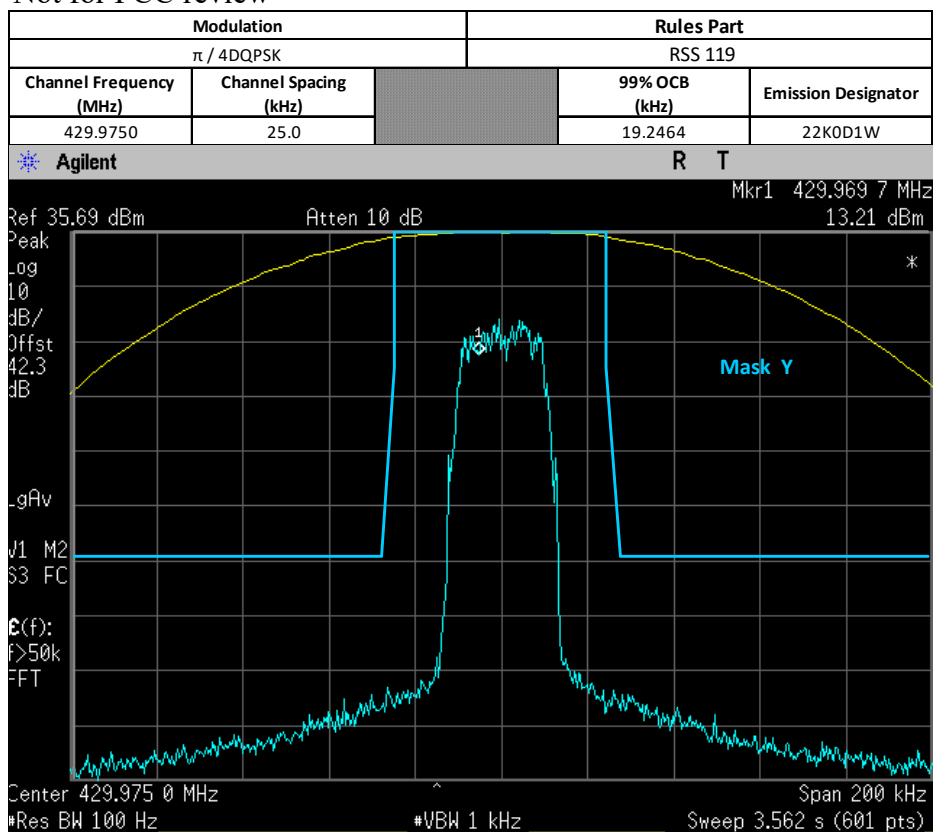


Not for FCC review

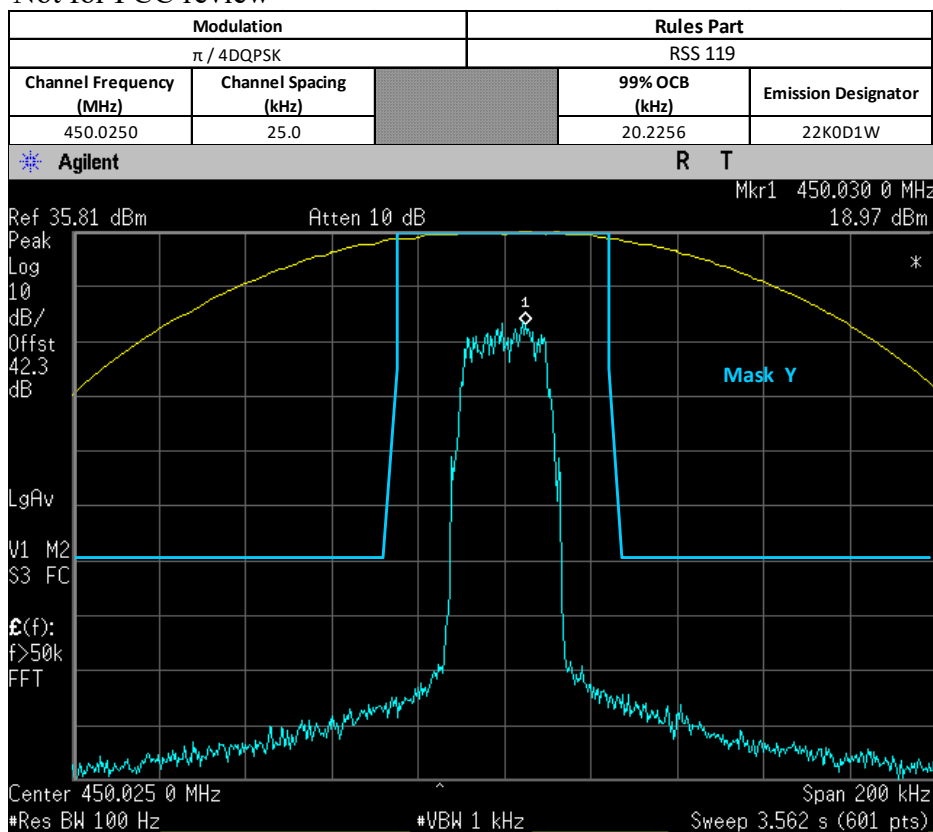

Not for FCC review

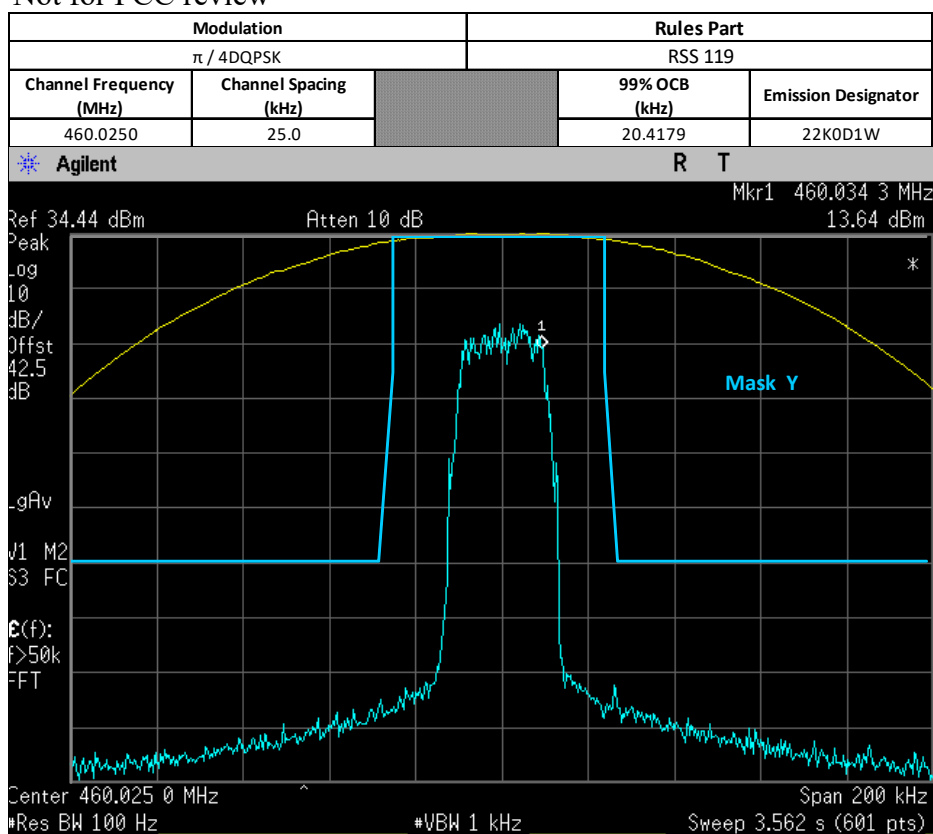

Not for FCC review

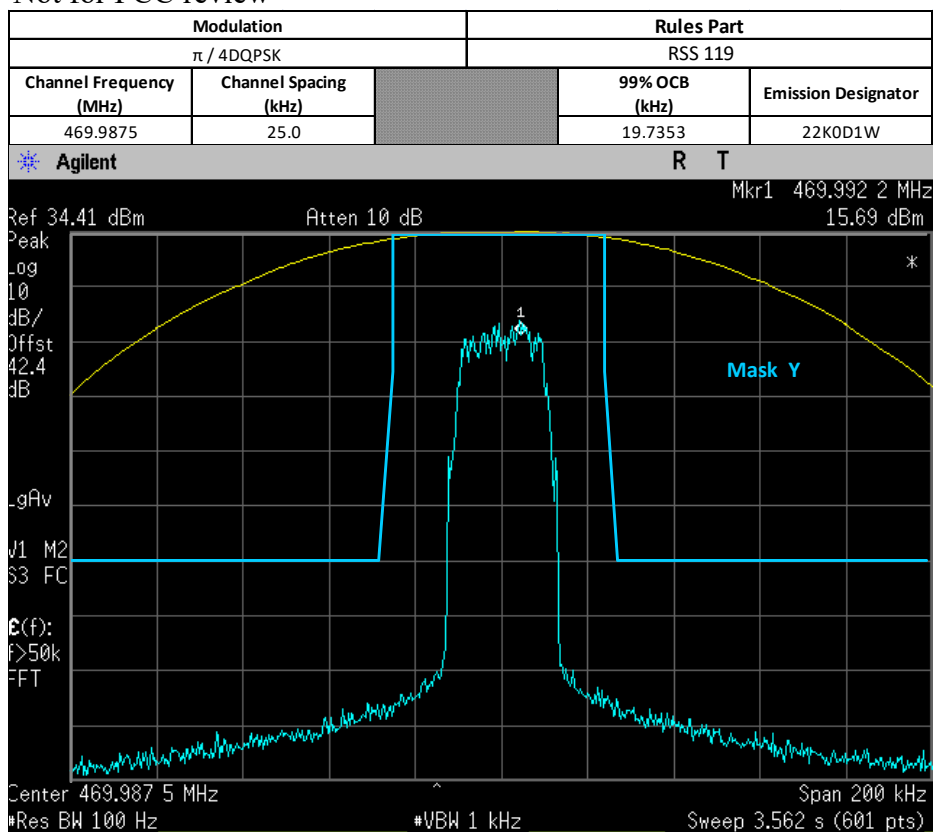


6.6.5. Test Limit

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

6.7. Band Edge Conducted Spurious Emission (Part 22)

6.7.1. Test Setup (Analog)

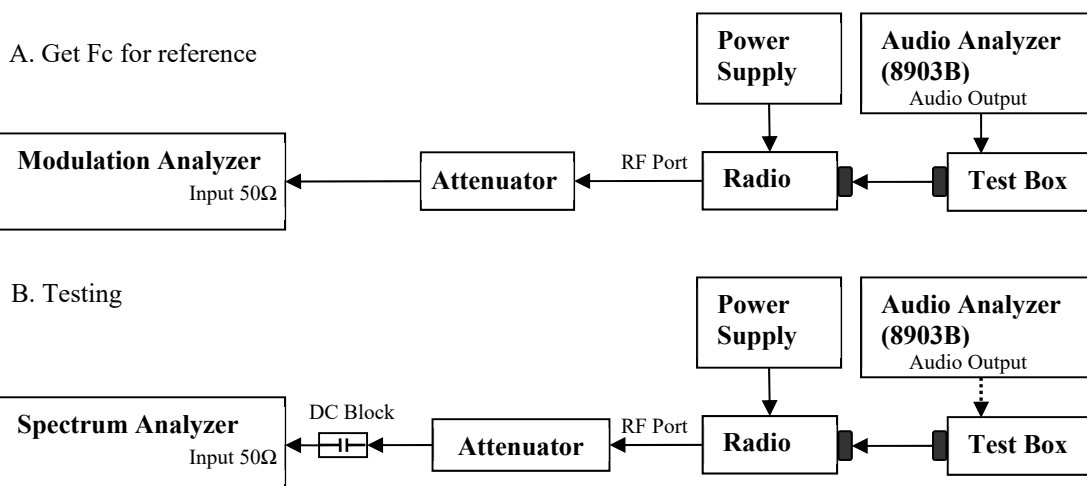

- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Set the audio bandwidth filter to 15 kHz low pass filter and 50 kHz high pass filter.
- 3) Transmit the radio and set the audio analyzer to 2.5 kHz audio frequency and 50% of the rated deviation. Up the amplitude by 16 dB. Dekey the DUT.
- 4) Path loss for the measurement included.
- 5) Select the Occupied Bandwidth measurement for 99% and 26dB Emissions Bandwidth Measurement.
- 6) Key in the Fc and Resolution Bandwidth.
- 7) Transmit the DUT and record the occupied Bandwidth frequencies.
- 8) Preset the spectrum analyzer for band edge measurement.
- 9) The band edges of lowest and highest channels were measured.
- 10) Key in the Lowest and highest channel frequency, span is 60 kHz and Resolution Bandwidth is at least 1% of Emission Bandwidth.
- 11) Save the screen shot as modulated signal.
- 12) Remove the audio tone from audio analyzer to capture unmodulated signal.


*Note:

- For emission designator ending with F3E, 16K0F3E is the worst case and therefore only 16K0F3E will be shown.

6.7.2. Test Result (Analog)

Not Applicable.

6.7.3. Test Setup (Digital)

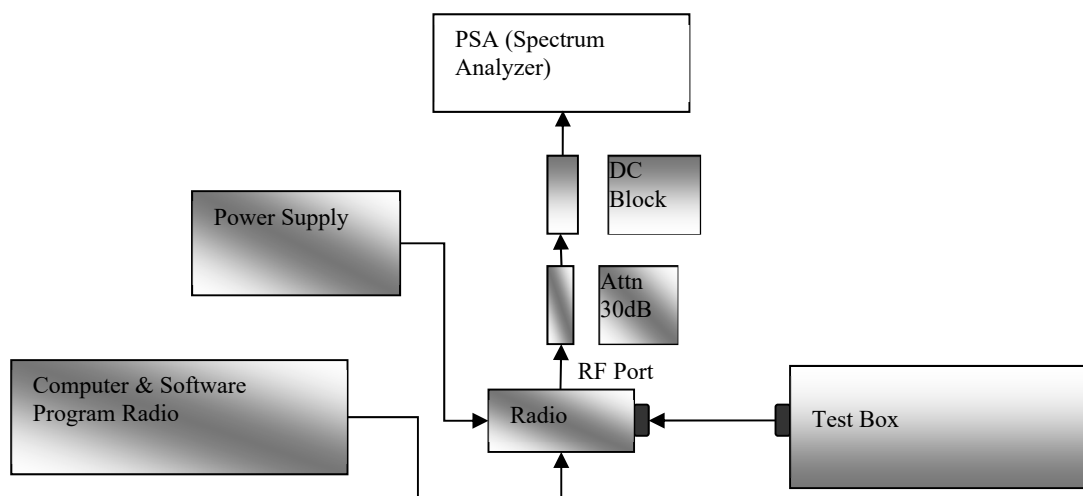

- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (*4FSK, C4FM or other digital modulation form).
- 2) Path loss for the measurement included.
- 3) Select the Occupied Bandwidth measurement for 99% and 26dB Emissions Bandwidth Measurement.
- 4) Key in the Fc and Resolution Bandwidth.
- 5) Transmit radio record the occupied Bandwidth frequencies.
- 6) Preset the spectrum analyzer for band edge measurement.
- 7) Key in the lowest and highest channels frequency, span is 60 kHz and Resolution Bandwidth is at least 1% of Emission Bandwidth.
- 8) Save the screen shot.

*Note:

- For Digital Modulation, 12.5 kHz Data F1D & FXD would be the same. Therefore only measurements with F1D modulation shown below.
- For Digital Modulation, 12.5 kHz Data F1E & FXE would be the same. Therefore only measurements with F1E modulation shown below.

6.7.4. Test Result (Digital)


Not Applicable.

6.7.5. Test Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

6.8. Transient Frequency Behavior



6.8.1. Test Setup


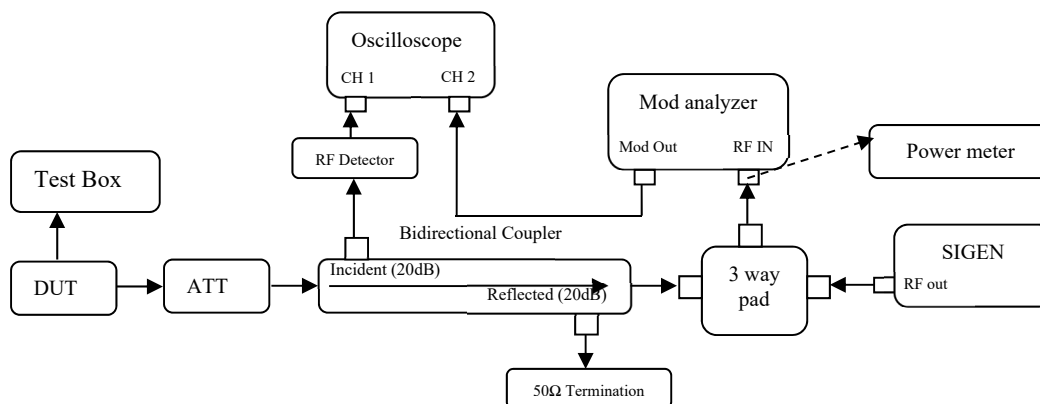


- 1) Connect the setup as figure above.
- 2) Path loss for the measurement included.
- 3) Set on Sigen with the assigned center frequency, internal 1 kHz FM tone.
FM Deviation: Analog 25kHz Channel Spacing = 25 kHz
Analog 12.5 kHz Channel Spacing = 12.5 kHz
C4FM = 12.5 kHz
- 4) Turn on 50 kHz high pass filter and 15 kHz low pass filter on modulation analyzer.
- 5) Supply sufficient attenuation ATT to provide the output power of $\leq -11\text{dBm}$ into power meter when DUT is keying up.
- 6) Note the power level on power meter and dekey the DUT.
- 7) Adjust the amplitude of the signal generator to the level power meter, maintained the amplitude throughout the rest of the measurement.
- 8) Connect the output to modulation analyzer.
- 9) Reduce 30dB attenuation and transmit the radio to get the trigger line.
- 10) Capture the screen shot for key-up (rising edge) and de-key (falling edge) mode.

6.8.2. Test Result

Not for FCC review

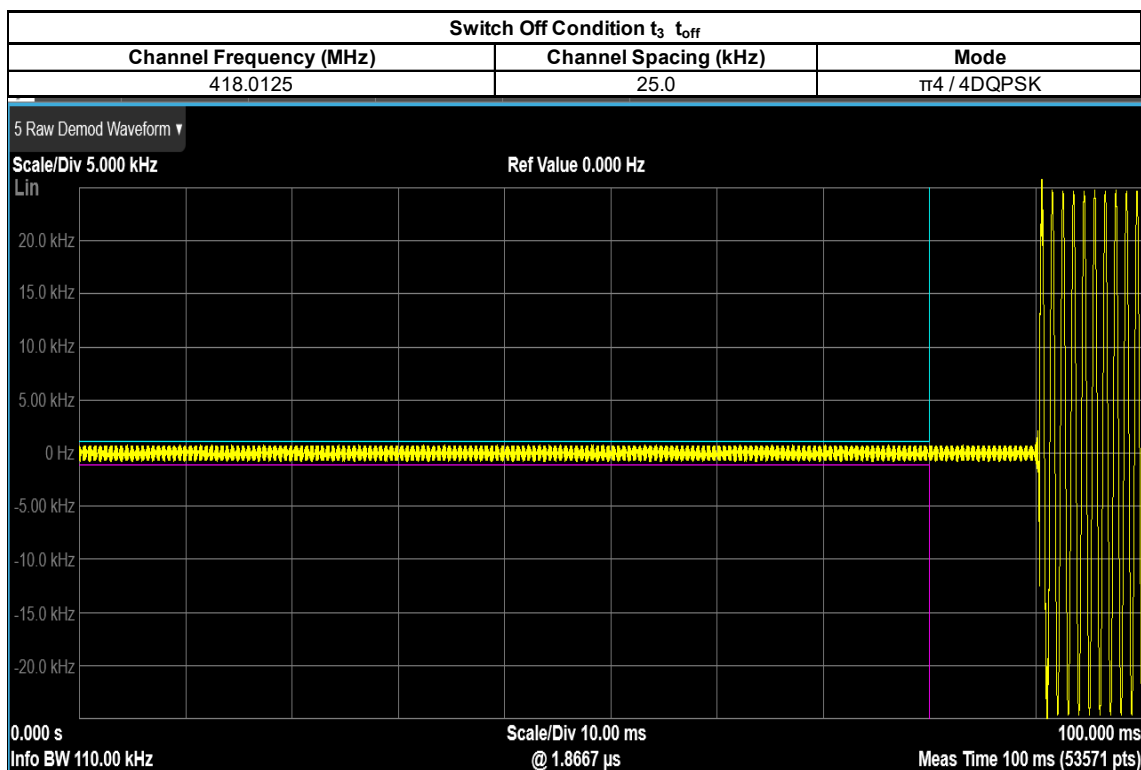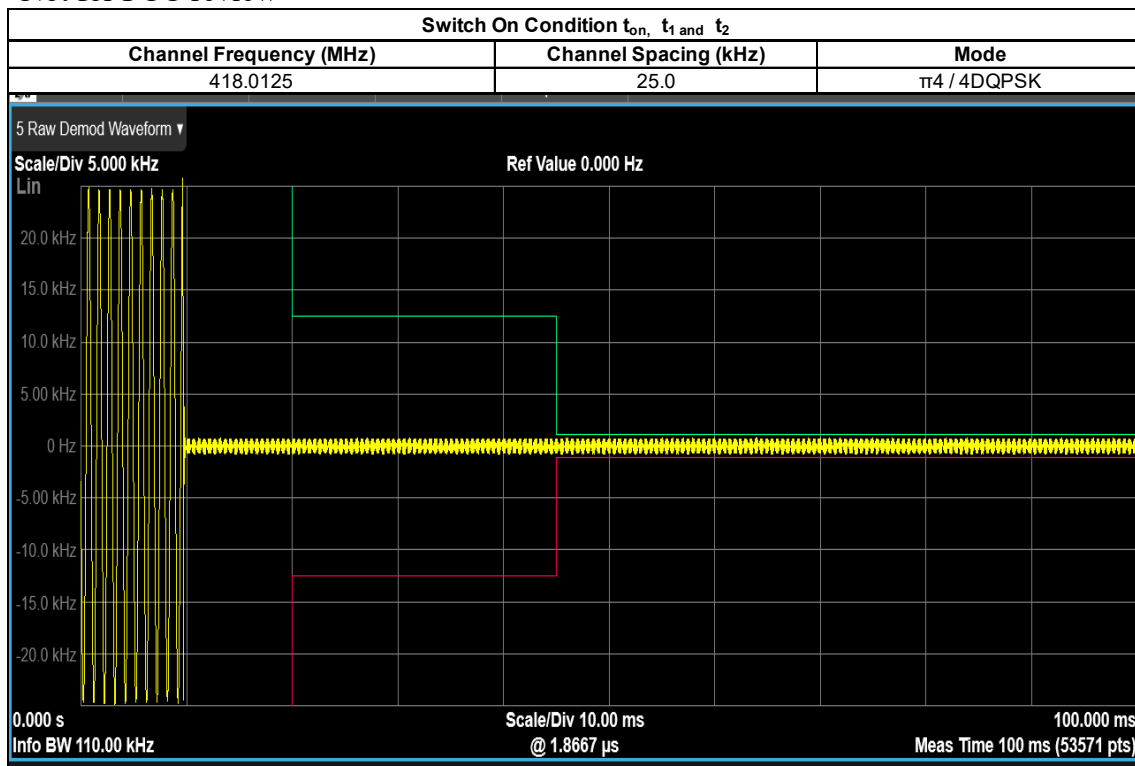

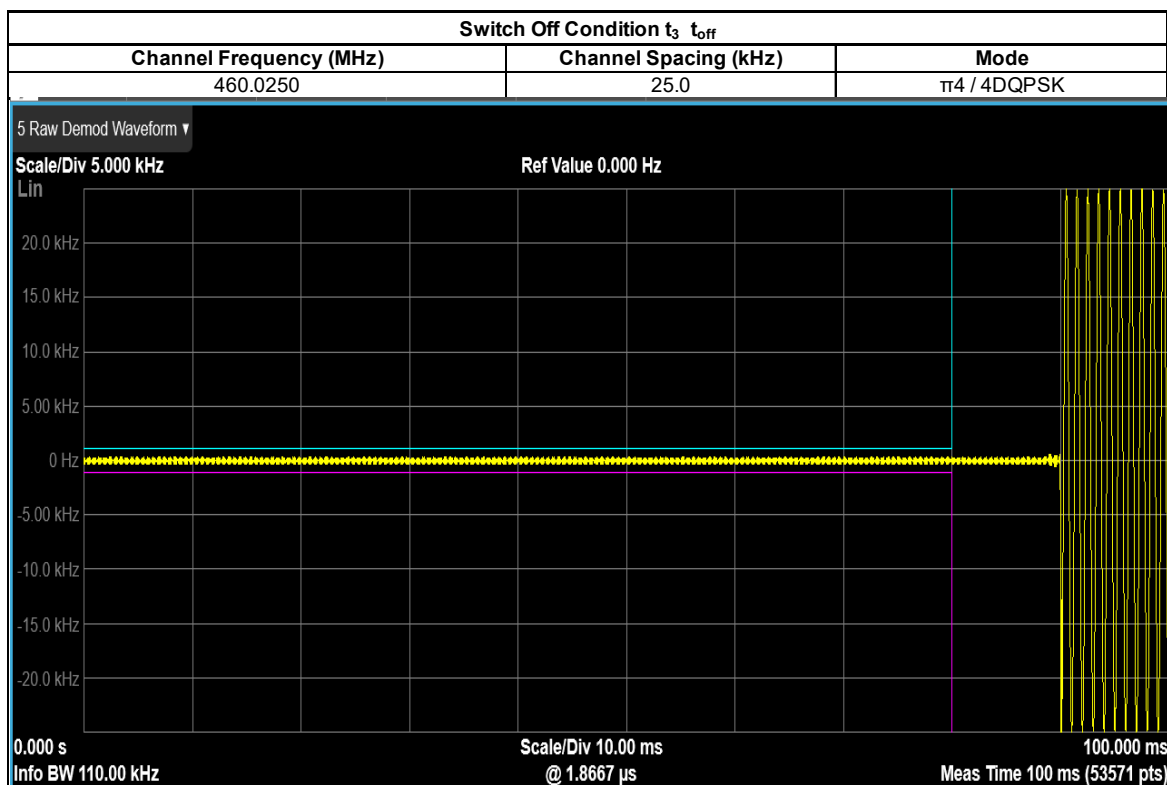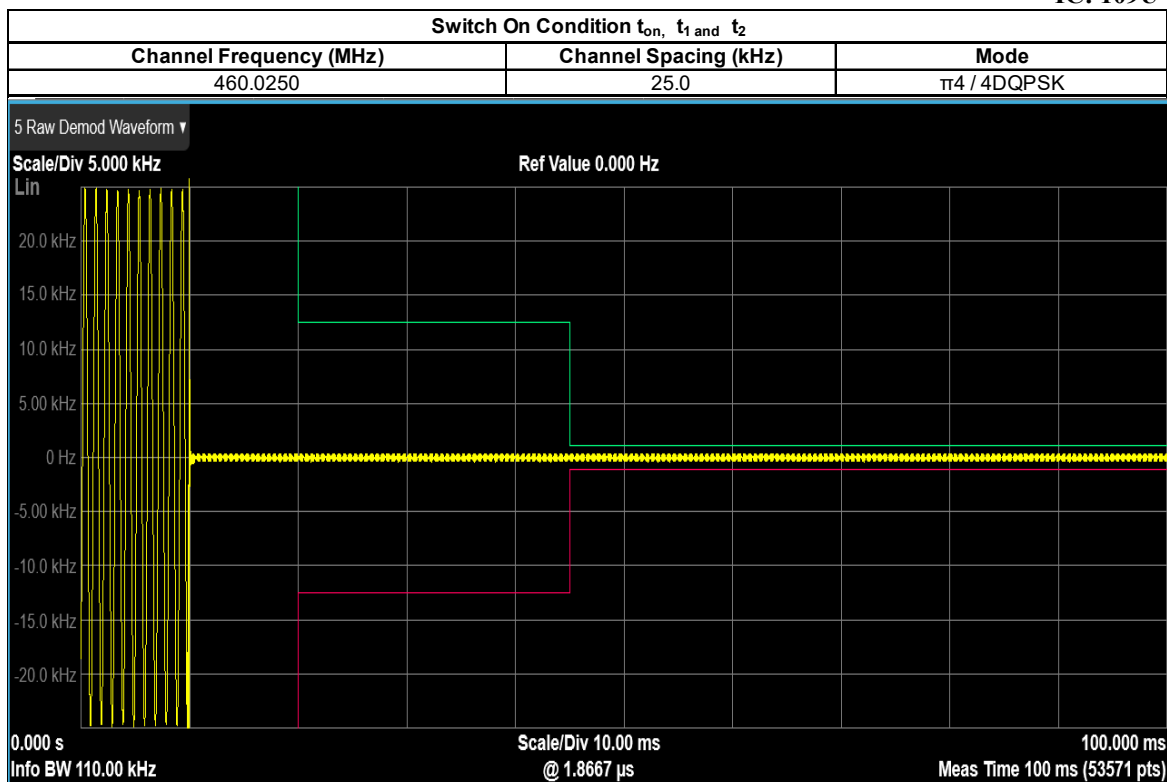

6.8.3. Test Limit

Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum frequency difference limits during the time intervals indicated:

Time intervals ^{1 2}	Maximum frequency difference ³	All equipment	
		150 to 174 MHz	421 to 512 MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels			
t ₁ ⁴	±25.0 kHz	5.0 ms	10.0 ms
t ₂	±12.5 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±25.0 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels			
t ₁ ⁴	±12.5 kHz	5.0 ms	10.0 ms
t ₂	±6.25 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±12.5 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels			
t ₁ ⁴	±6.25 kHz	5.0 ms	10.0 ms
t ₂	±3.125 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±6.25 kHz	5.0 ms	10.0 ms

¹ t_{on} is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

t_1 is the time period immediately following t_{on} .

t_2 is the time period immediately following t_1 .

t_3 is the time period from the instant when the transmitter is turned off until t_{off} .

t_{off} is the instant when the 1 kHz test signal starts to rise.


² During the time from the end of t_2 to the beginning of t_3 , the frequency difference must not exceed the limits specified in §90.213.

³ Difference between the actual transmitter frequency and the assigned transmitter frequency.

⁴ If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

6.9. Adjacent Channel Power

6.9.1. Test Setup (Analog)

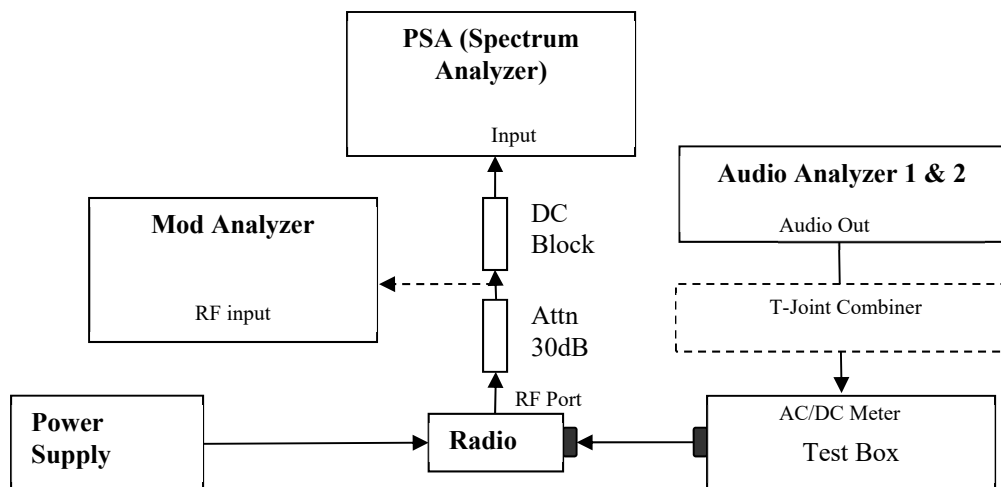


- 1) The DUT transmitter output port was connected to modulation analyzer.
- 2) Transmit the radio and turn on 1st audio analyzer with audio frequency 650Hz, 50% rated deviation, and record the amplitude value as AmpT1.
- 3) Turn off Audio analyzer 1 and turn on audio analyzer 2, set the audio frequency to 2.2 kHz and 50% deviation. Record the amplitude as AmpT2.
- 4) Turn both audio analyzers ON and up 10dB amplitude level.
- 5) Connect the output to PSA and set to assigned center frequency.
- 6) Set Span, Resolution Bandwidth and Video Bandwidth per rules part.
- 7) Transmit the radio and record the Adjacent Channel Power value in dBc.

6.9.2. Test Result

Not Applicable.

6.9.3. Test Setup (Digital)

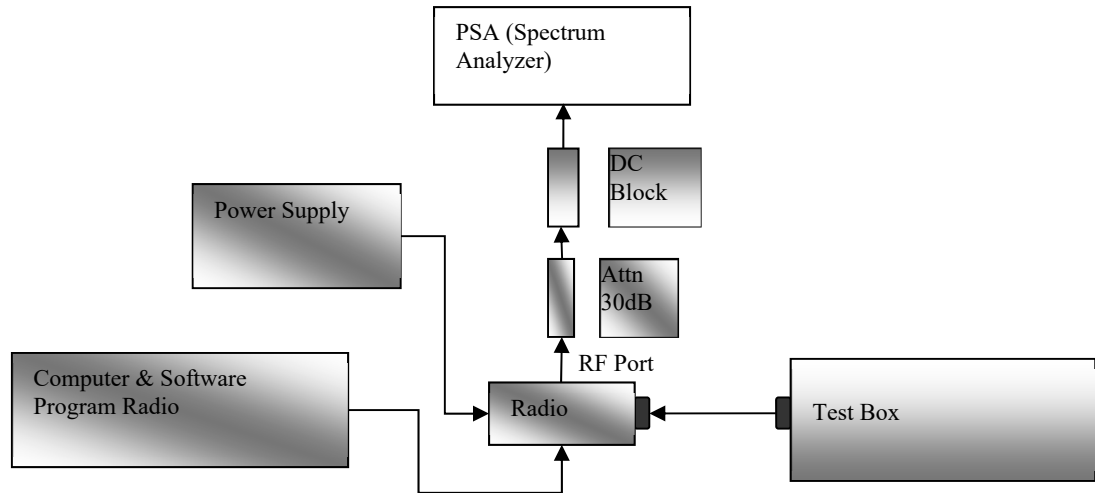

- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (4FSK, C4FM or other digital modulation form).
- 2) Prepare setup as per picture.
- 3) Turn on the ACP Measurement – Press Measure, ACP.
- 4) Set Span, Resolution Bandwidth and Video Bandwidth as per rules part.
- 5) Transmit the radio and record the Adjacent Channel Power value in dBc.

6.9.4. Test Result

Mode	π / 4DQPSK (MSPD)			
Frequency, MHz	450.025			
Channel Spacing, kHz	25			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
25.000	18	-69.030	-68.790	-60
50.000	18	-72.720	-72.890	-70
75.000	18	-80.090	-80.270	-70

Mode	π / 4DQPSK (MSPD)			
Frequency, MHz	460.025			
Channel Spacing, kHz	25			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
25.000	18	-69.570	-69.640	-60
50.000	18	-74.890	-74.620	-70
75.000	18	-79.410	-77.670	-70

Mode	π / 4DQPSK (MSPD)			
Frequency, MHz	469.9875			
Channel Spacing, kHz	25			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
25.000	18	-71.580	-69.230	-60
50.000	18	-76.340	-74.900	-70
75.000	18	-78.670	-78.180	-70

Mode	π / 4DQPSK (TXNDC)			
Frequency, MHz	450.025			
Channel Spacing, kHz	25			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
25.000	18	-80.120	-78.730	-60
50.000	18	-84.900	-84.230	-70
75.000	18	-86.200	-88.800	-70

Mode	π / 4DQPSK (TXNDC)			
Frequency, MHz	460.025			
Channel Spacing, kHz	25			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
25.000	18	-80.790	-79.940	-60
50.000	18	-84.760	-84.180	-70
75.000	18	-87.730	-87.940	-70

Mode	π / 4DQPSK (TXNDC)			
Frequency, MHz	469.9875			
Channel Spacing, kHz	25			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
25.000	18	-79.860	-77.370	-60
50.000	18	-85.800	-84.490	-70
75.000	18	-88.090	-88.670	-70

6.9.5. Test Limit

12.5 kHz MOBILE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP relative (dBc)
9.375	6.25	-40
15.625	6.25	-60
21.875	6.25	-60
37.50	25.00	-60
62.50	25.00	-65
87.50	25.00	-65
150.00	100	-65
250.00	100	-65
350.00	100	-65
>400 to 12 MHz	30 (s)	-75
12 MHz to paired receive band	30 (s)	-75
In the paired receive band	30 (s)	-100

25 kHz MOBILE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP relative (dBc)
15.625	6.25	-40
21.875	6.25	-60
37.50	25	-60
62.50	25	-65
87.50	25	-65
150.00	100	-65
250.00	100	-65
350.00	100	-65
>400 kHz to 12 MHz	30 (s)	-75
12 MHz to paired receive band	30 (s)	-75
In the paired receive band	30 (s)	-100

12.5 kHz BASE TRANSMITTER ACP REQUIREMENTS


Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP (dBc)
9.375	6.25	-40
15.625	6.25	-60
21.875	6.25	-60
37.5	25	-60
62.5	25	-65
87.5	25	-65
150	100	-65
250	100	-65
350.00	100	-65
>400 kHz to 12 MHz	30 (s)	-80
12 MHz to paired receive band	30 (s)	-80
In the paired receive band	30 (s)	¹ -85

25 kHz BASE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP (dBc)
15.625	6.25	-40
21.875	6.25	-60
37.5	25	-60
62.5	25	-65
87.5	25	-65
150	100	-65
250	100	-65
350	100.00	-65
>400 kHz to 12 MHz	30 (s)	-80
12 MHz to paired receive band	30 (s)	-80
In the paired receive band	30 (s)	¹ -85

6.10. Conducted Spurious Emission

6.10.1. Test Setup

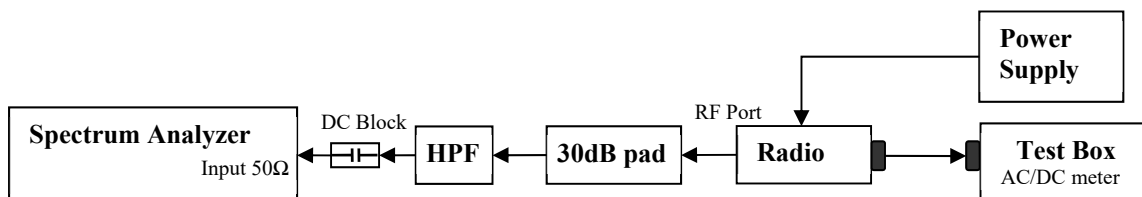


- 1) The DUT transmitter output port was connected to Spectrum Analyzer with above setup.
- 2) Program and set radio to operate in desire test frequency and mode. (Analog / digital modulation form).
- 3) Path loss for the measurement included.
- 4) Set the PSA Resolution Bandwidth as per rules part.
- 5) Set the Ref offset from the pathloss offset calibration file.
- 6) Adjust the center frequency of the spectrum analyzer for incremental coverage of the range from:
 - a. 9 KHz to $F_c - \text{Test Bandwidth}$
 - b. $F_c + \text{Test Bandwidth}$ to $2F_c - 5\text{MHz}$.
- 7) Key up the DUT, Peak Search the highest Spur and record the levels of spurious emissions
- 8) Dekey the DUT.
- 9) Turn On High Pass Filter path and Key up the DUT.
- 10) Adjust the PSA Freq for incremental coverage of range from $2F_c$ to $10F_c$
- 11) Key up the DUT and record the highest spur levels of spurious emissions.

6.10.2. Test Result (Analog)

Not Applicable.

6.10.3. Test Result (Digital)


PI/4DQPSK (MSPD) : 406.125. MHz, 25 kHz Channel Spacing, Max. Power
Not for FCC review

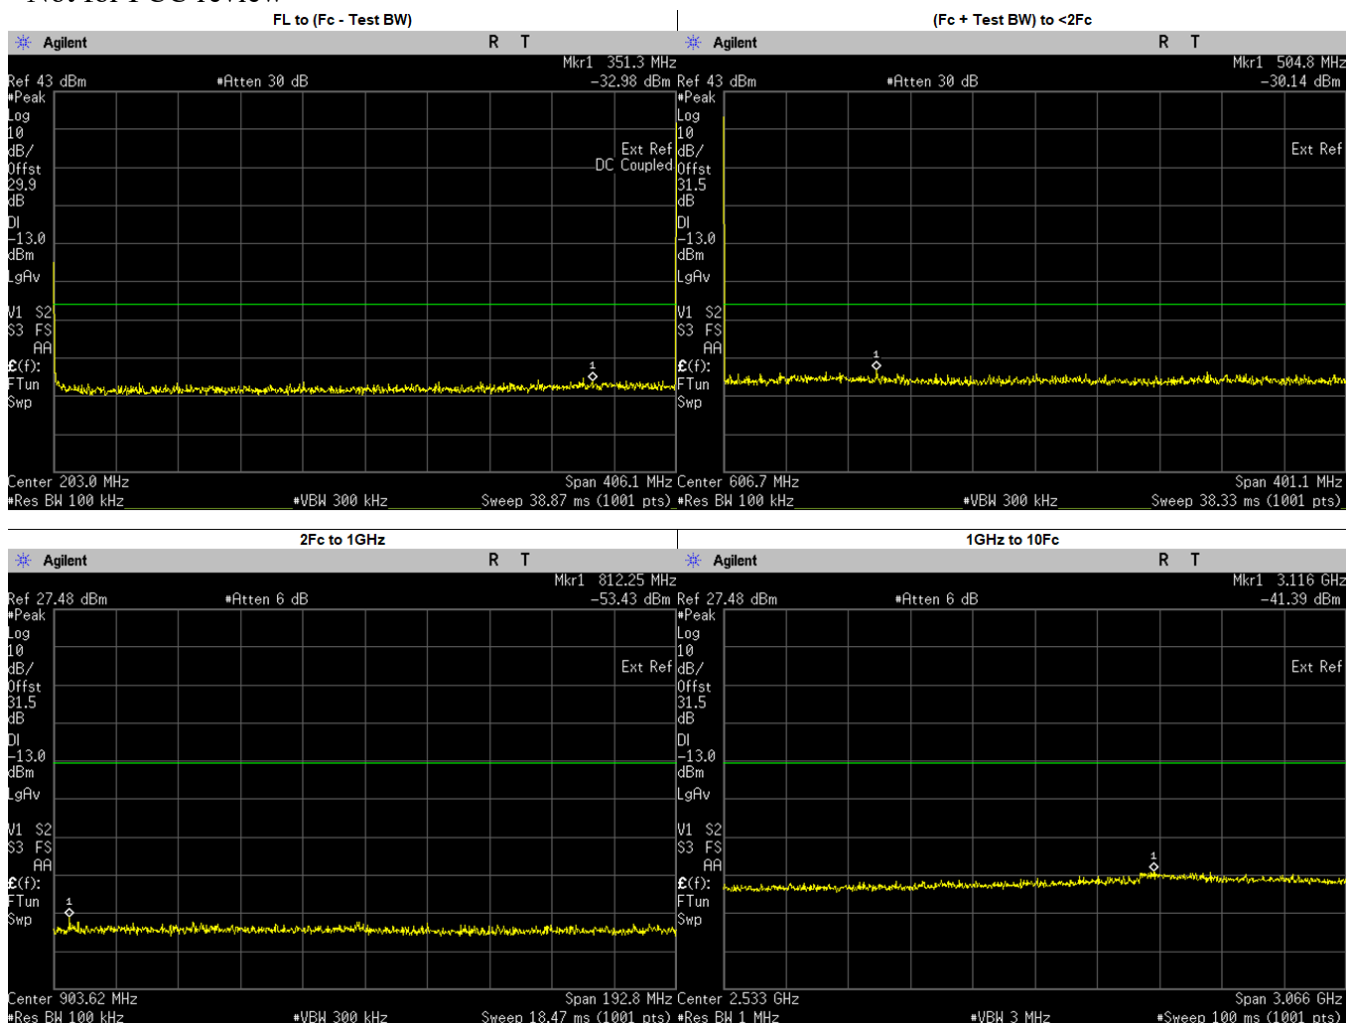

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	351.3000	-32.9810	-13.00	PASS
(Fc + Test BW) to <2Fc	504.8437	-30.1400	-13.00	PASS
2Fc to 1GHz	812.2500	-53.4300	-13.00	PASS
1GHz to 10Fc	3115.7130	-41.3900	-13.00	PASS
	1218.3750	-45.9345	-13.00	PASS
	1624.5000	-45.7145	-13.00	PASS
	2030.6250	-45.7657	-13.00	PASS
	2436.7500	-45.1792	-13.00	PASS
	2842.8750	-44.7448	-13.00	PASS
	3249.0000	-43.3013	-13.00	PASS
	3655.1250	-42.8336	-13.00	PASS
	4061.2500	-44.0154	-13.00	PASS

PI/4DQPSK (MSPD) : 418.0125. MHz, 25 kHz Channel Spacing, Max. Power


Not for FCC review

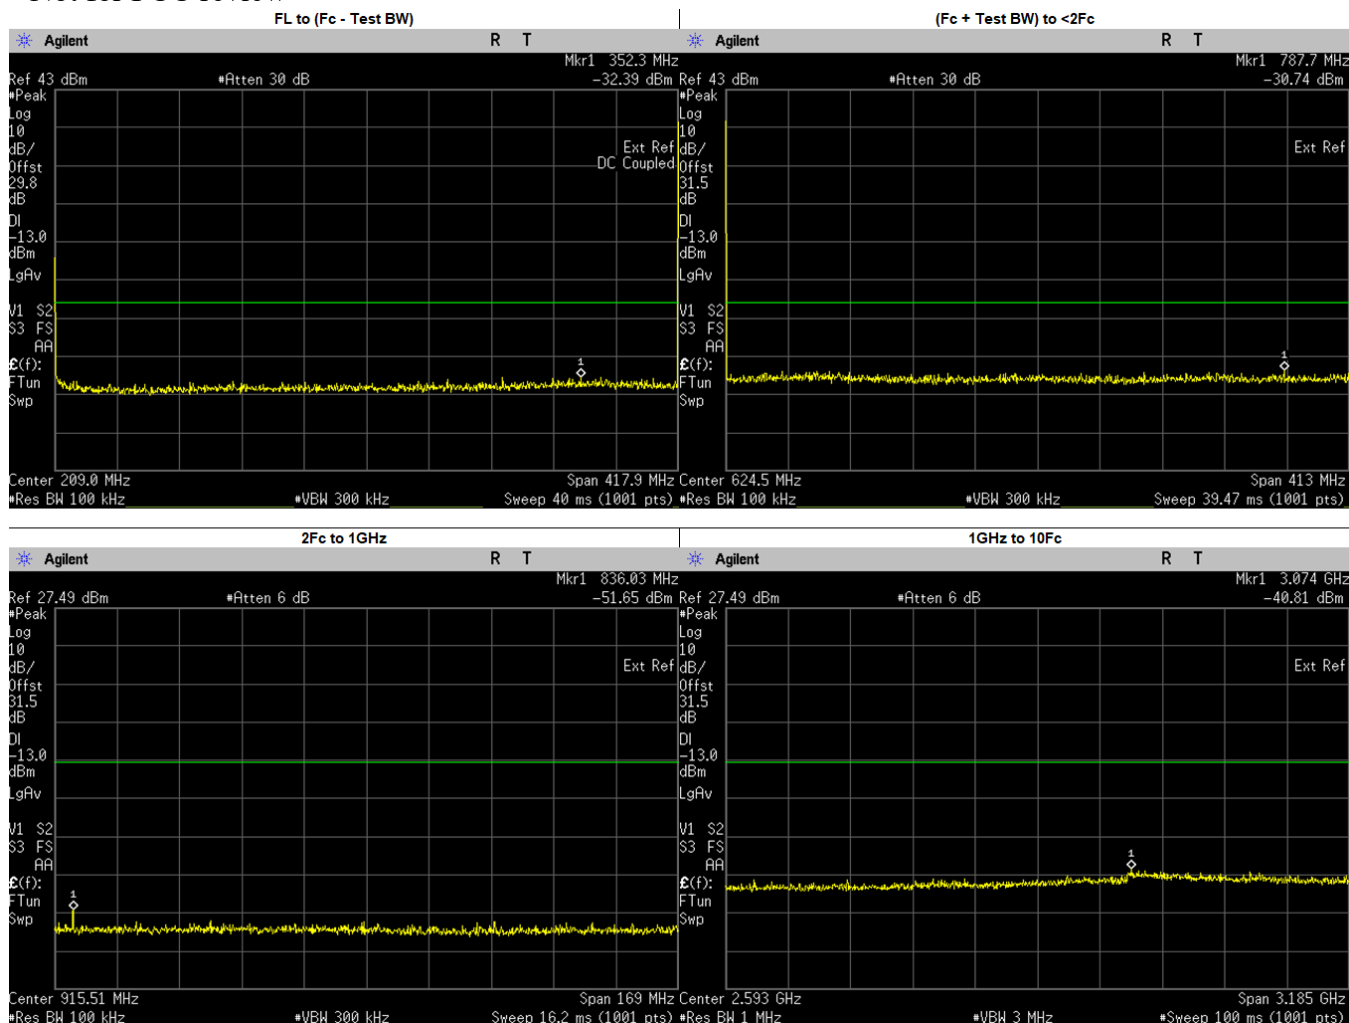

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	352.3000	-32.3930	-13.00	PASS
(Fc + Test BW) to <2Fc	787.6645	-30.7400	-13.00	PASS
2Fc to 1GHz	836.0250	-51.6500	-13.00	PASS
1GHz to 10Fc	3073.5160	-40.8100	-13.00	PASS
	1254.0370	-46.0034	-13.00	PASS
	1672.0500	-45.6014	-13.00	PASS
	2090.0620	-45.6832	-13.00	PASS
	2508.0750	-44.6130	-13.00	PASS
	2926.0880	-44.0527	-13.00	PASS
	3344.1000	-42.7364	-13.00	PASS
	3762.1130	-43.6097	-13.00	PASS
	4180.1250	-44.1901	-13.00	PASS



PI/4DQPSK (MSPD) : 429.975. MHz, 25 kHz Channel Spacing, Max. Power

Not for FCC review

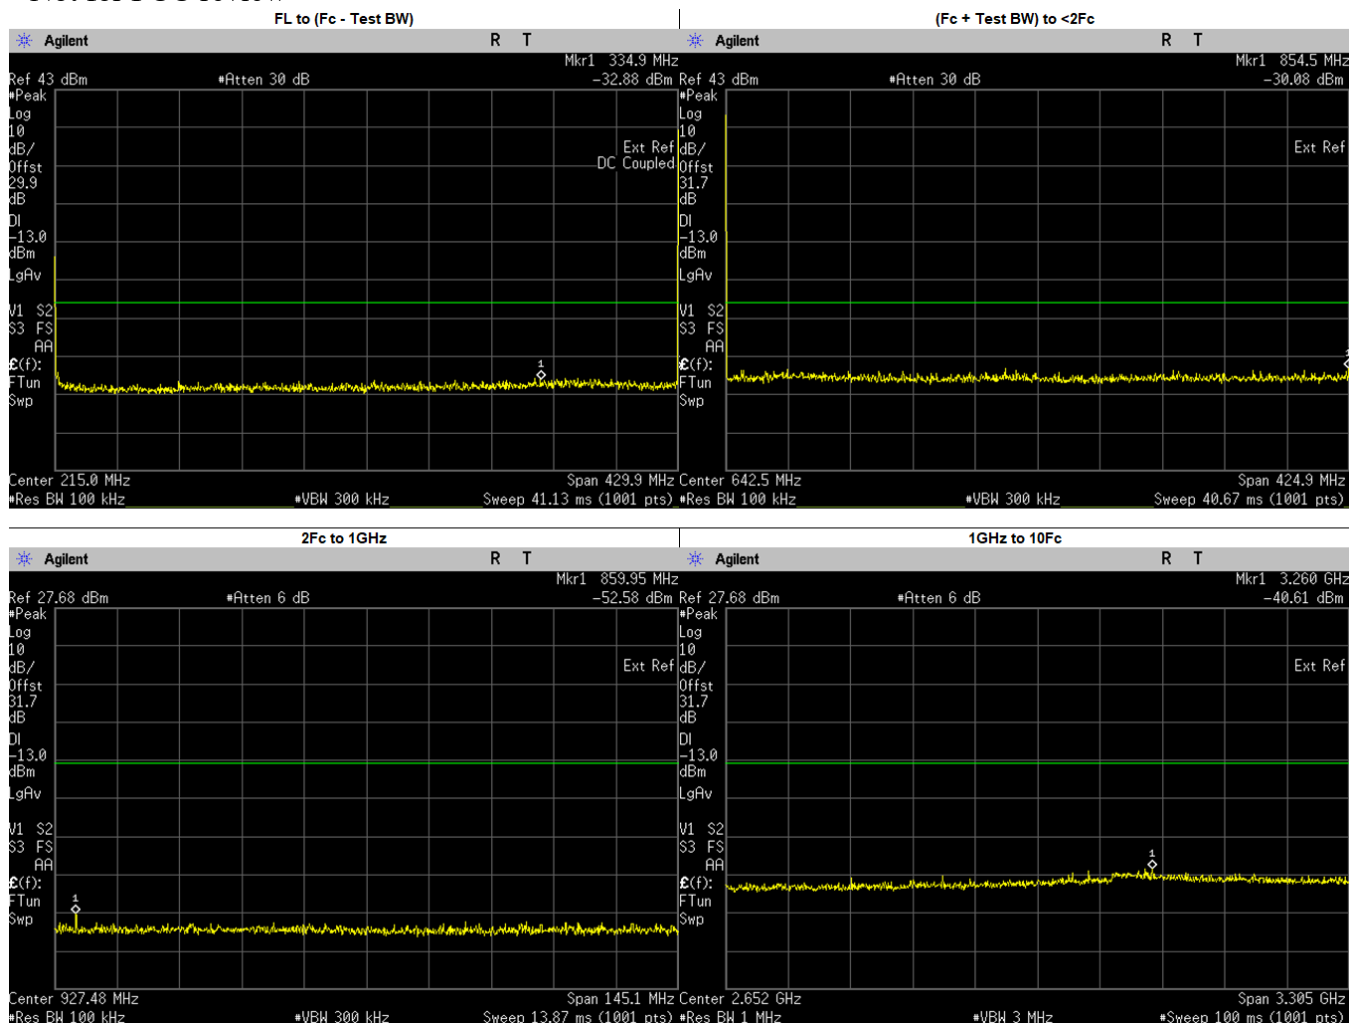



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	334.9000	-32.8750	-13.00	PASS
(Fc + Test BW) to <2Fc	854.5251	-30.0800	-13.00	PASS
2Fc to 1GHz	859.9500	-52.5800	-13.00	PASS
1GHz to 10Fc	3260.4490	-40.6100	-13.00	PASS
	1289.9250	-45.0964	-13.00	PASS
	1719.9000	-44.7305	-13.00	PASS
	2149.8750	-42.6632	-13.00	PASS
	2579.8500	-44.0268	-13.00	PASS
	3009.8250	-43.0942	-13.00	PASS
	3439.8000	-43.7141	-13.00	PASS
	3869.7750	-43.3629	-13.00	PASS
	4299.7500	-44.1713	-13.00	PASS

PI/4DQPSK (MSPD) : 450.025. MHz, 25 kHz Channel Spacing, Max. Power

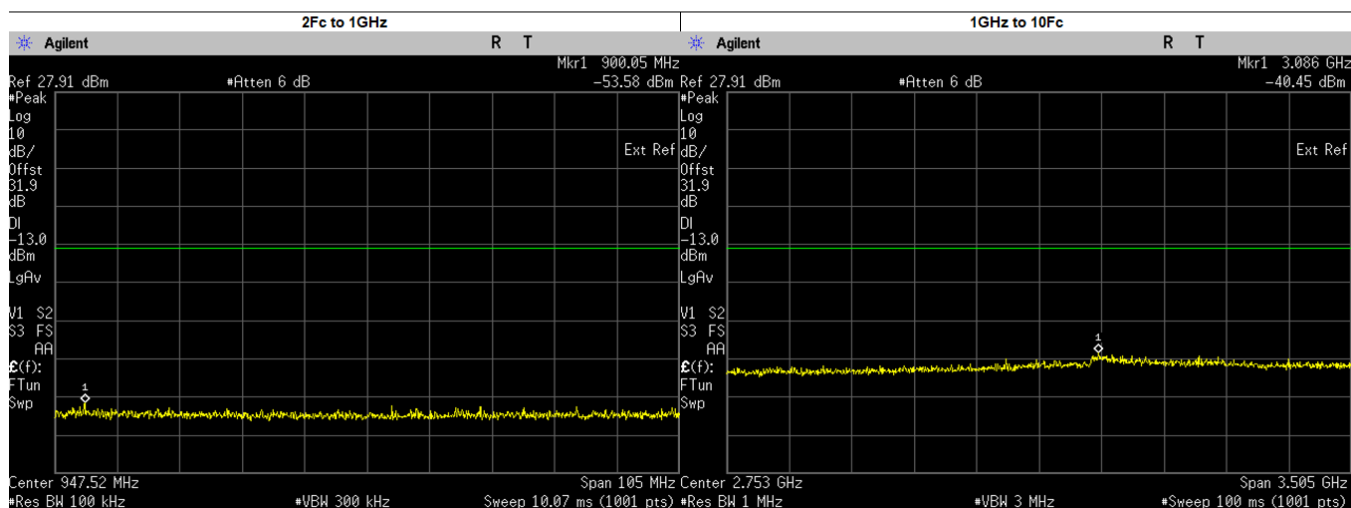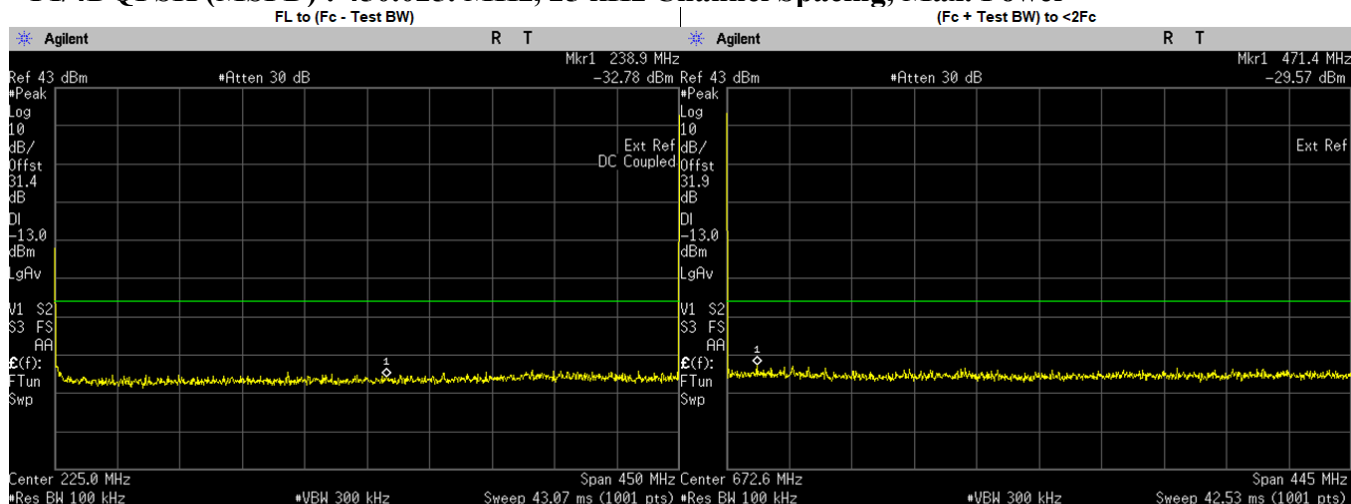



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	238.9000	-32.7790	-13.00	PASS
(Fc + Test BW) to <2Fc	471.4403	-29.5700	-13.00	PASS
2Fc to 1GHz	900.0500	-53.5800	-13.00	PASS
1GHz to 10Fc	3085.6240	-40.4500	-13.00	PASS
	1350.0750	-45.2595	-13.00	PASS
	1800.1000	-44.9741	-13.00	PASS
	2250.1250	-45.1529	-13.00	PASS
	2700.1500	-44.2215	-13.00	PASS
	3150.1750	-42.5466	-13.00	PASS
	3600.2000	-43.7351	-13.00	PASS
	4050.2250	-43.8490	-13.00	PASS
	4500.2500	-43.5641	-13.00	PASS

PI/4DQPSK (MSPD) : 460.025. MHz, 25 kHz Channel Spacing, Max. Power

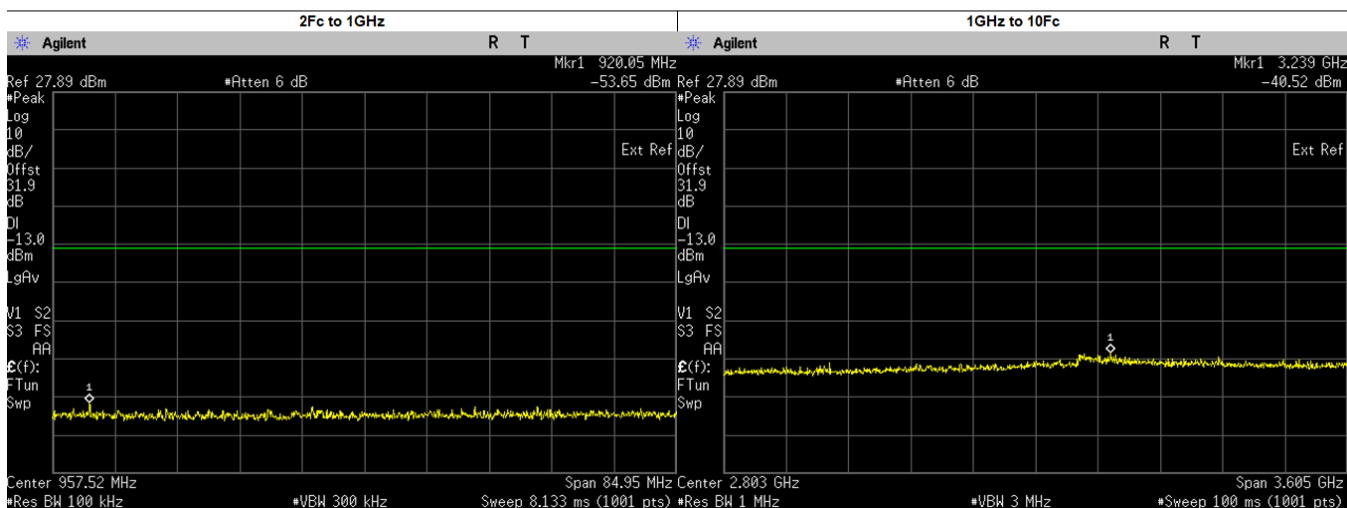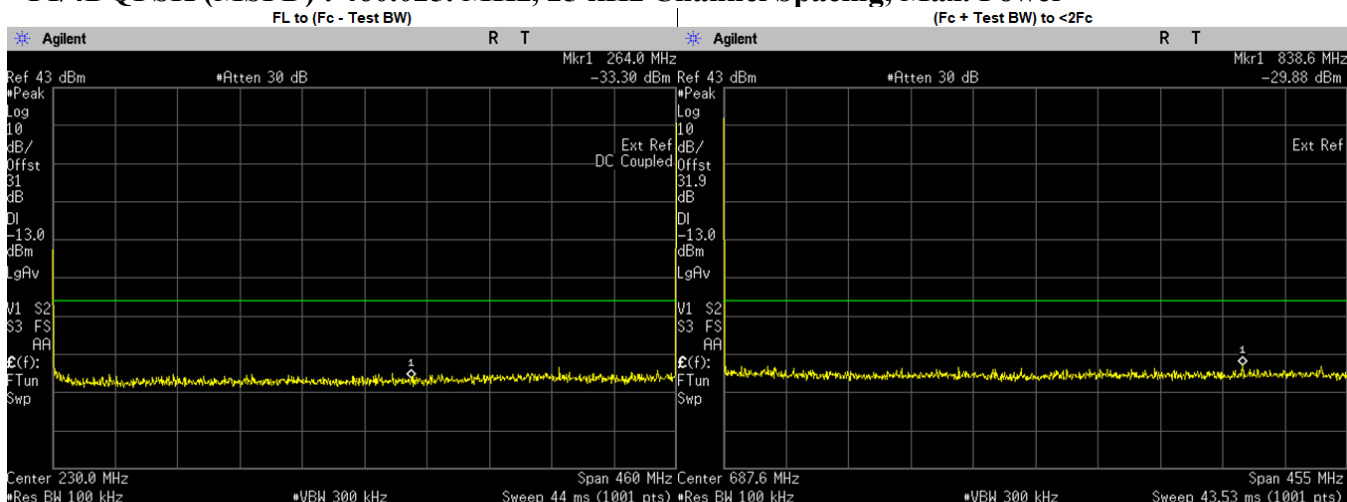

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	264.0000	-33.2970	-13.00	PASS
(Fc + Test BW) to <2Fc	838.6153	-29.8800	-13.00	PASS
2Fc to 1GHz	920.0500	-53.6500	-13.00	PASS
1GHz to 10Fc	3238.8600	-40.5200	-13.00	PASS
	1380.0750	-45.3297	-13.00	PASS
	1840.1000	-45.4979	-13.00	PASS
	2300.1250	-44.5302	-13.00	PASS
	2760.1500	-43.2287	-13.00	PASS
	3220.1750	-41.6158	-13.00	PASS
	3680.2000	-43.3385	-13.00	PASS
	4140.2250	-43.3632	-13.00	PASS
	4600.2500	-43.5229	-13.00	PASS


PI/4DQPSK (MSPD) : 469.9875. MHz, 25 kHz Channel Spacing, Max. Power

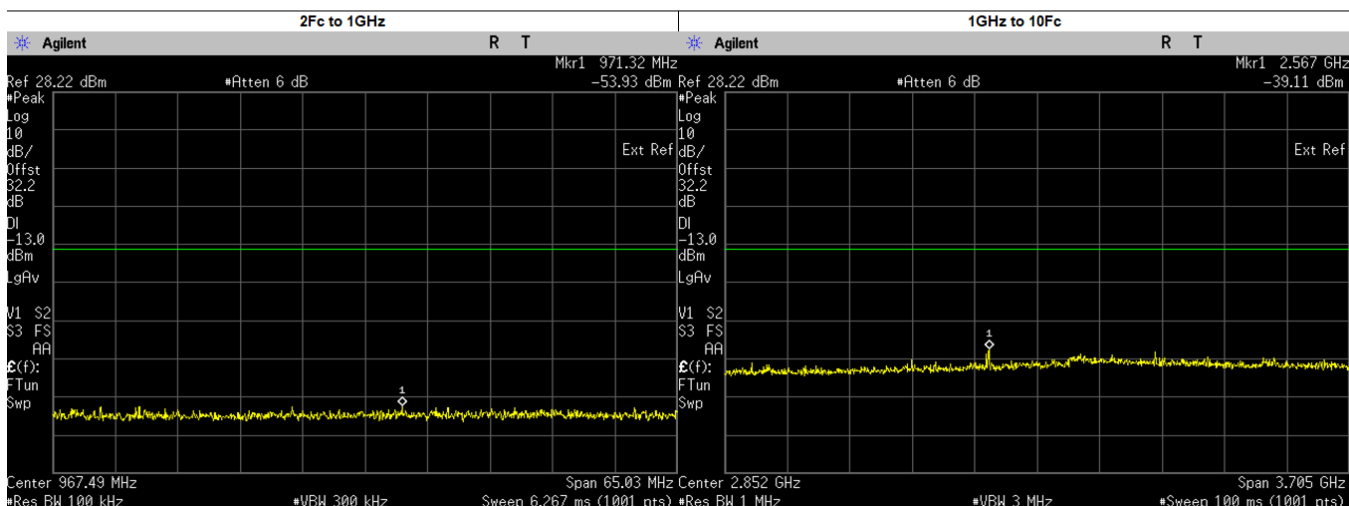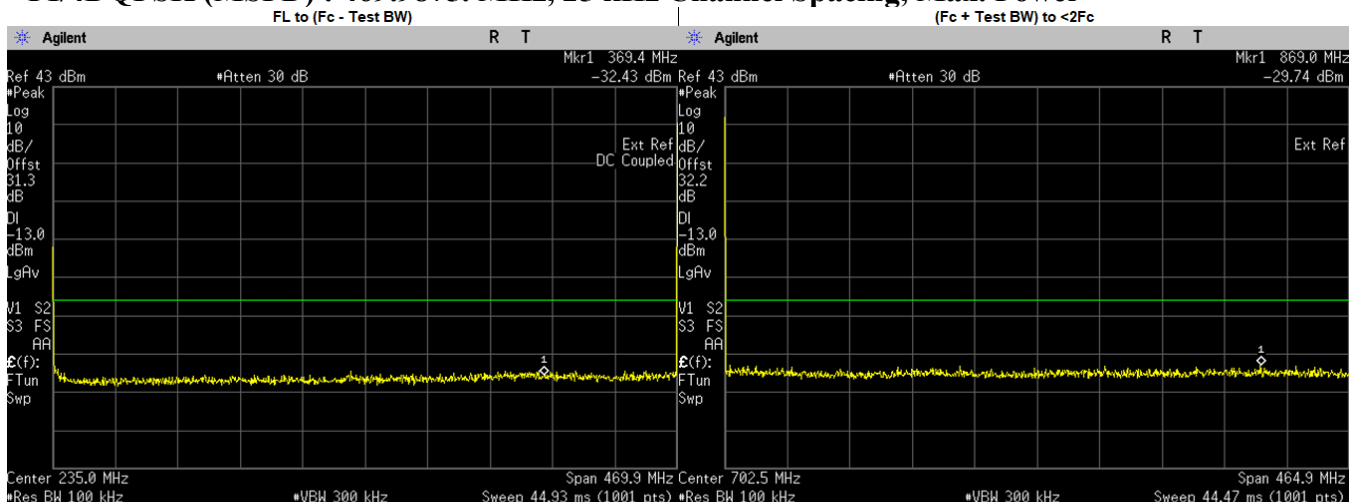

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	369.4000	-32.4280	-13.00	PASS
(Fc + Test BW) to <2Fc	868.9548	-29.7400	-13.00	PASS
2Fc to 1GHz	971.3240	-53.9300	-13.00	PASS
	939.9750	-54.3010	-13.00	PASS
1GHz to 10Fc	2567.1620	-39.1100	-13.00	PASS
	1409.9630	-45.5363	-13.00	PASS
	1879.9500	-45.0638	-13.00	PASS
	2349.9370	-44.4606	-13.00	PASS
	2819.9250	-43.2283	-13.00	PASS
	3289.9120	-42.2947	-13.00	PASS
	3759.9000	-43.5152	-13.00	PASS
	4229.8870	-42.1492	-13.00	PASS
	4699.8750	-44.3747	-13.00	PASS

PI/4DQPSK (TXNDC) : 406.125. MHz, 25 kHz Channel Spacing, Max. Power


Not for FCC review

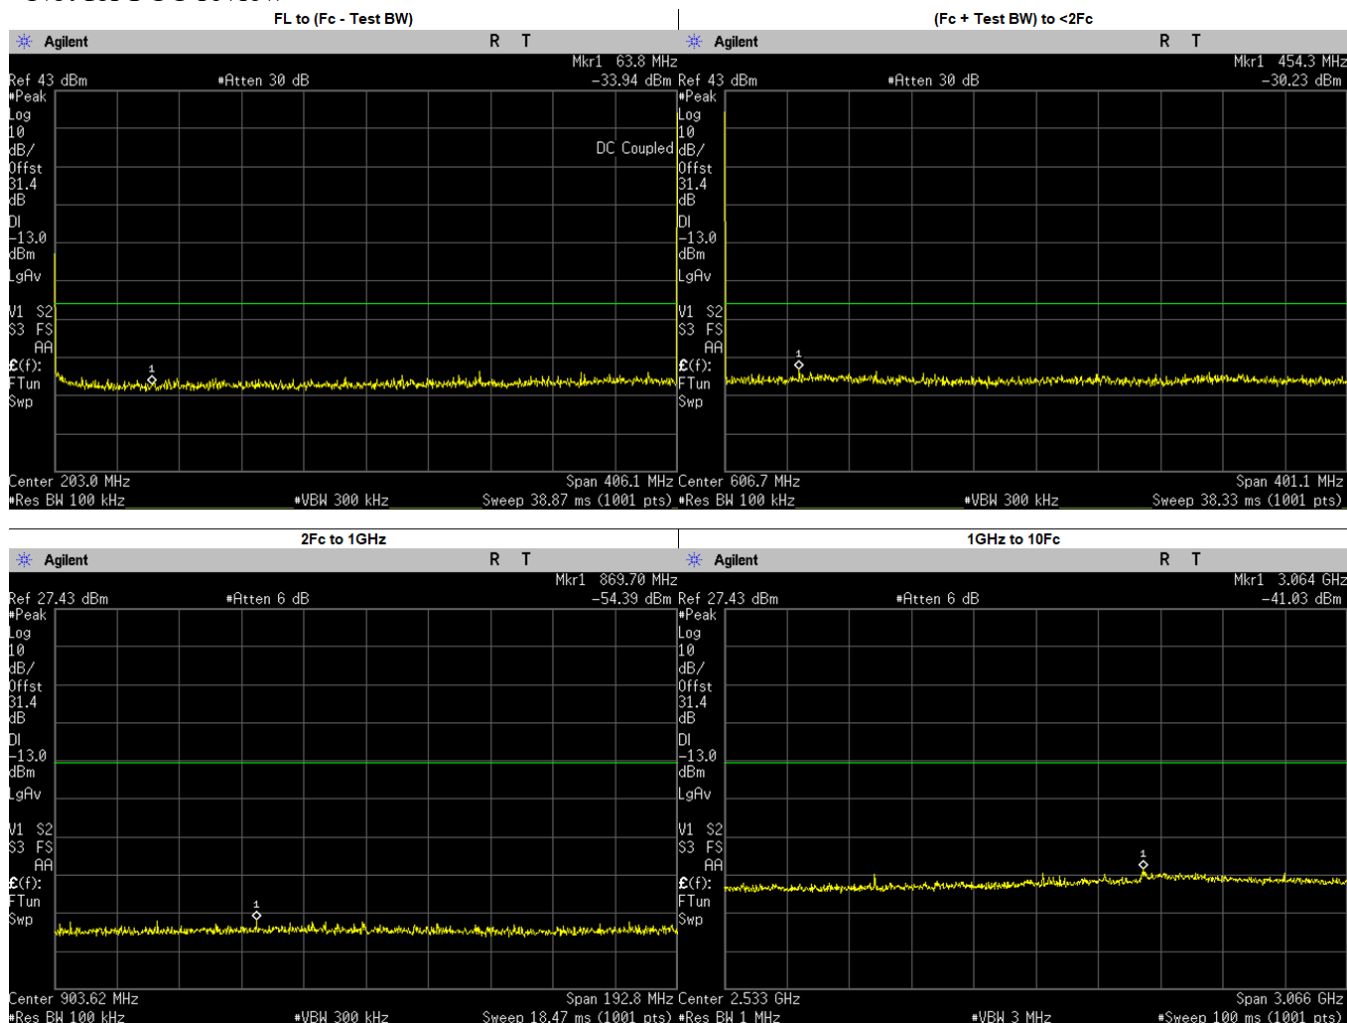

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	3.3000	-33.1920	-13.00	PASS
(Fc + Test BW) to <2Fc	454.3090	-30.2300	-13.00	PASS
2Fc to 1GHz	869.7010	-54.3900	-13.00	PASS
	812.2500	-54.9099	-13.00	PASS
1GHz to 10Fc	3063.5860	-41.0300	-13.00	PASS
	1218.3750	-46.0039	-13.00	PASS
	1624.5000	-46.1620	-13.00	PASS
	2030.6250	-46.3608	-13.00	PASS
	2436.7500	-45.6361	-13.00	PASS
	2842.8750	-43.7003	-13.00	PASS
	3249.0000	-42.7217	-13.00	PASS
	3655.1250	-43.7114	-13.00	PASS
	4061.2500	-44.0465	-13.00	PASS

PI/4DQPSK (TXNDC) : 418.0125. MHz, 25 kHz Channel Spacing, Max. Power


Not for FCC review

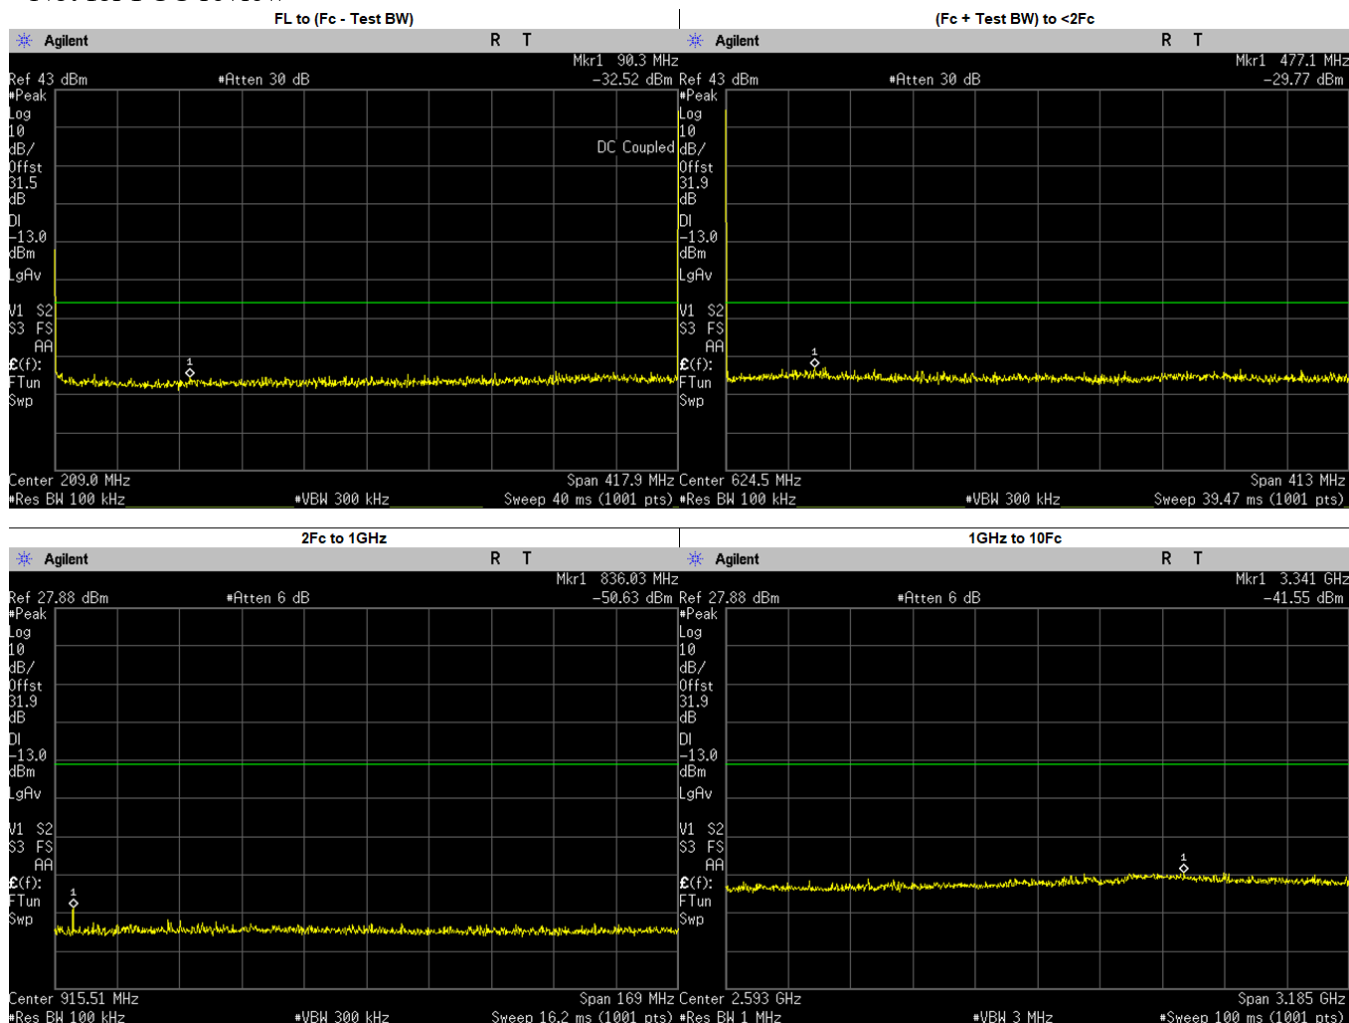

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	90.3000	-32.5220	-13.00	PASS
(Fc + Test BW) to <2Fc	477.1210	-29.7700	-13.00	PASS
2Fc to 1GHz	835.9253	-51.5300	-13.00	PASS
	836.0250	-50.9989	-13.00	PASS
1GHz to 10Fc	3341.0670	-41.5500	-13.00	PASS
	1254.0370	-45.2563	-13.00	PASS
	1672.0500	-44.7087	-13.00	PASS
	2090.0620	-45.0175	-13.00	PASS
	2508.0750	-44.1551	-13.00	PASS
	2926.0880	-44.3432	-13.00	PASS
	3344.1000	-42.7148	-13.00	PASS
	3762.1130	-43.9279	-13.00	PASS
	4180.1250	-44.2689	-13.00	PASS



PI/4DQPSK (TXNDC) : 429.975. MHz, 25 kHz Channel Spacing, Max. Power

Not for FCC review

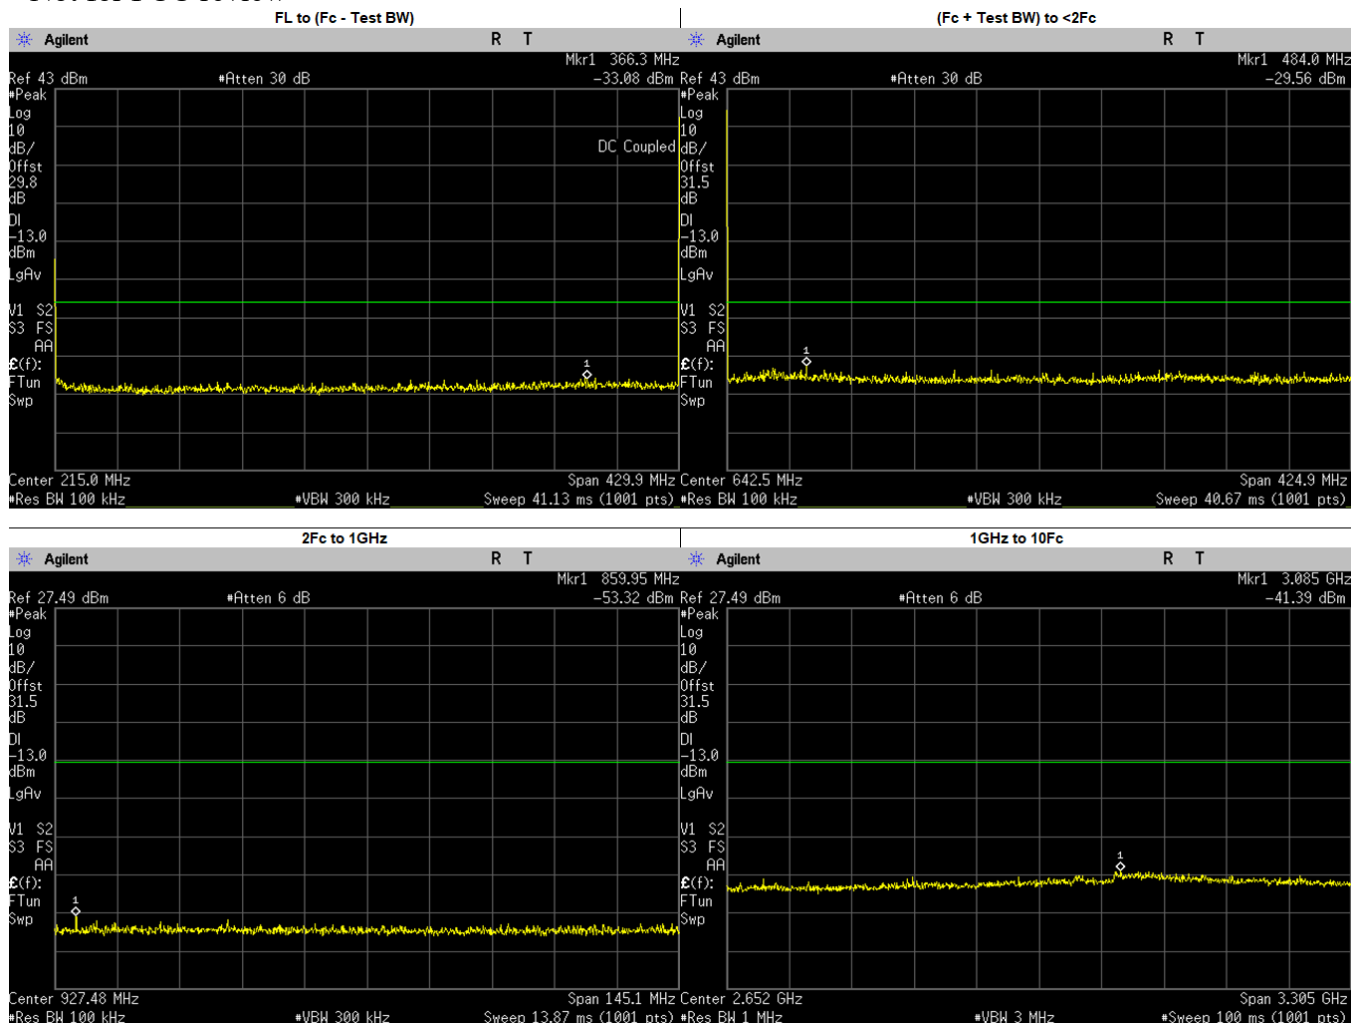



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	366.3000	-33.0820	-13.00	PASS
(Fc + Test BW) to <2Fc	483.9954	-29.5600	-13.00	PASS
2Fc to 1GHz	860.0267	-53.4200	-13.00	PASS
	859.9500	-53.3680	-13.00	PASS
1GHz to 10Fc	3085.2970	-41.3900	-13.00	PASS
	1289.9250	-45.5802	-13.00	PASS
	1719.9000	-46.3767	-13.00	PASS
	2149.8750	-45.4890	-13.00	PASS
	2579.8500	-44.5462	-13.00	PASS
	3009.8250	-43.8490	-13.00	PASS
	3439.8000	-43.3902	-13.00	PASS
	3869.7750	-44.9481	-13.00	PASS
	4299.7500	-44.9607	-13.00	PASS

PI/4DQPSK (TXNDC) : 450.025. MHz, 25 kHz Channel Spacing, Max. Power

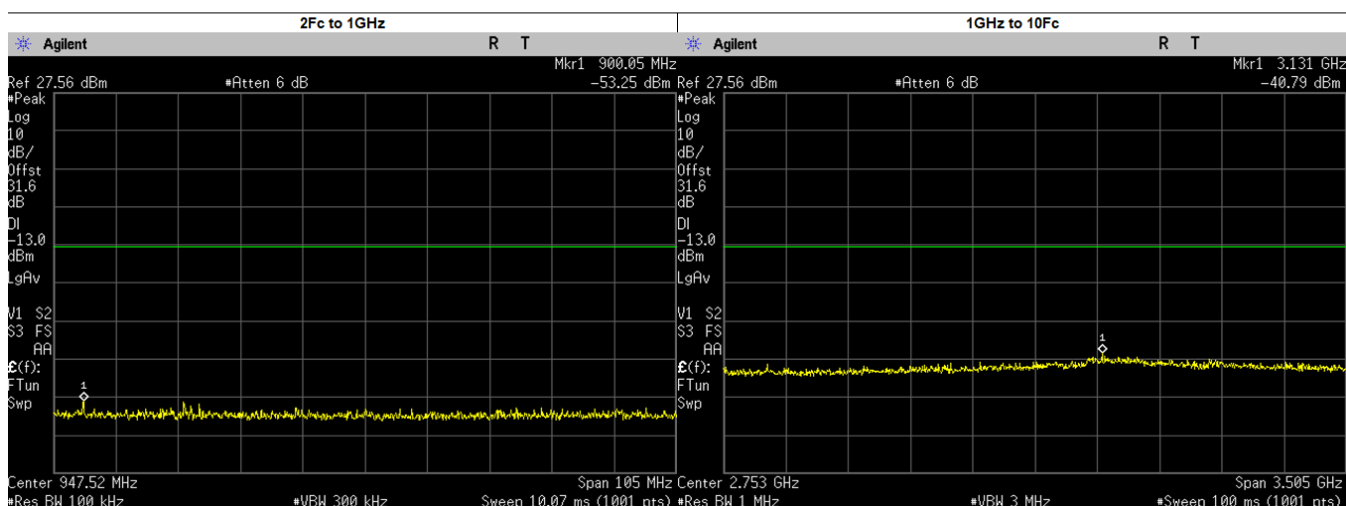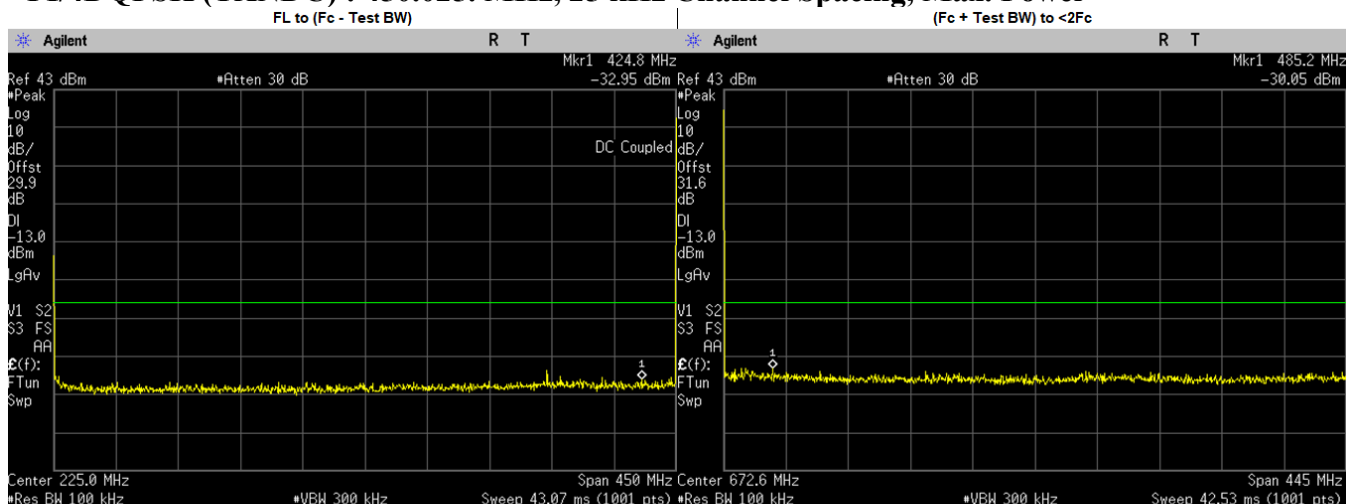



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	424.8000	-32.9520	-13.00	PASS
(Fc + Test BW) to <2Fc	485.2343	-30.0500	-13.00	PASS
2Fc to 1GHz	899.9827	-53.5300	-13.00	PASS
	900.0500	-53.3526	-13.00	PASS
1GHz to 10Fc	3131.1920	-40.7900	-13.00	PASS
	1350.0750	-46.2465	-13.00	PASS
	1800.1000	-45.4311	-13.00	PASS
	2250.1250	-44.4536	-13.00	PASS
	2700.1500	-44.5840	-13.00	PASS
	3150.1750	-42.8575	-13.00	PASS
	3600.2000	-44.0813	-13.00	PASS
	4050.2250	-44.7981	-13.00	PASS
	4500.2500	-45.0433	-13.00	PASS

PI/4DQPSK (TXNDC) : 460.025. MHz, 25 kHz Channel Spacing, Max. Power

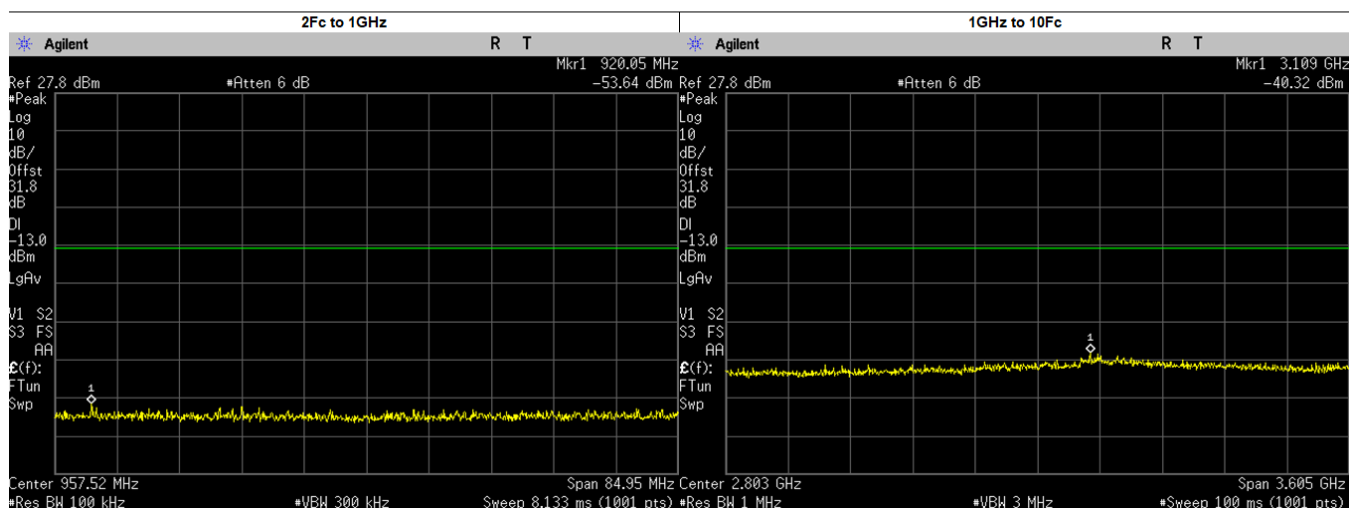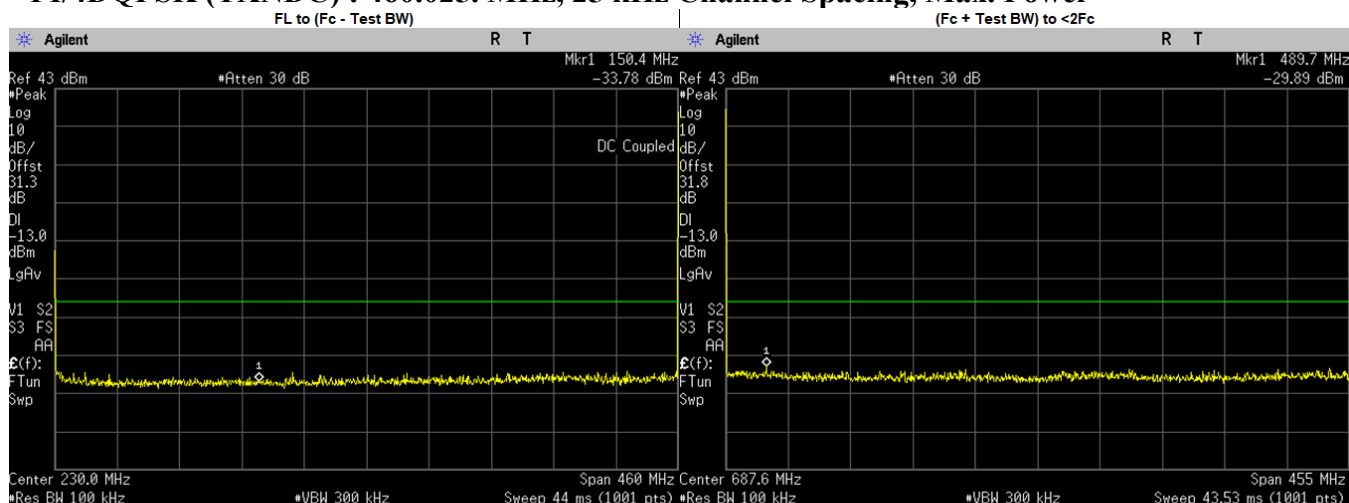

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	150.4000	-33.7750	-13.00	PASS
(Fc + Test BW) to <2Fc	489.6547	-29.8900	-13.00	PASS
2Fc to 1GHz	919.9771	-54.3000	-13.00	PASS
	920.0500	-53.7371	-13.00	PASS
1GHz to 10Fc	3109.0710	-40.3200	-13.00	PASS
	1380.0750	-45.7470	-13.00	PASS
	1840.1000	-45.0391	-13.00	PASS
	2300.1250	-44.5456	-13.00	PASS
	2760.1500	-43.8703	-13.00	PASS
	3220.1750	-42.9819	-13.00	PASS
	3680.2000	-43.9797	-13.00	PASS
	4140.2250	-43.9255	-13.00	PASS
	4600.2500	-44.4771	-13.00	PASS

PI/4DQPSK (TXNDC) : 469.9875. MHz, 25 kHz Channel Spacing, Max. Power

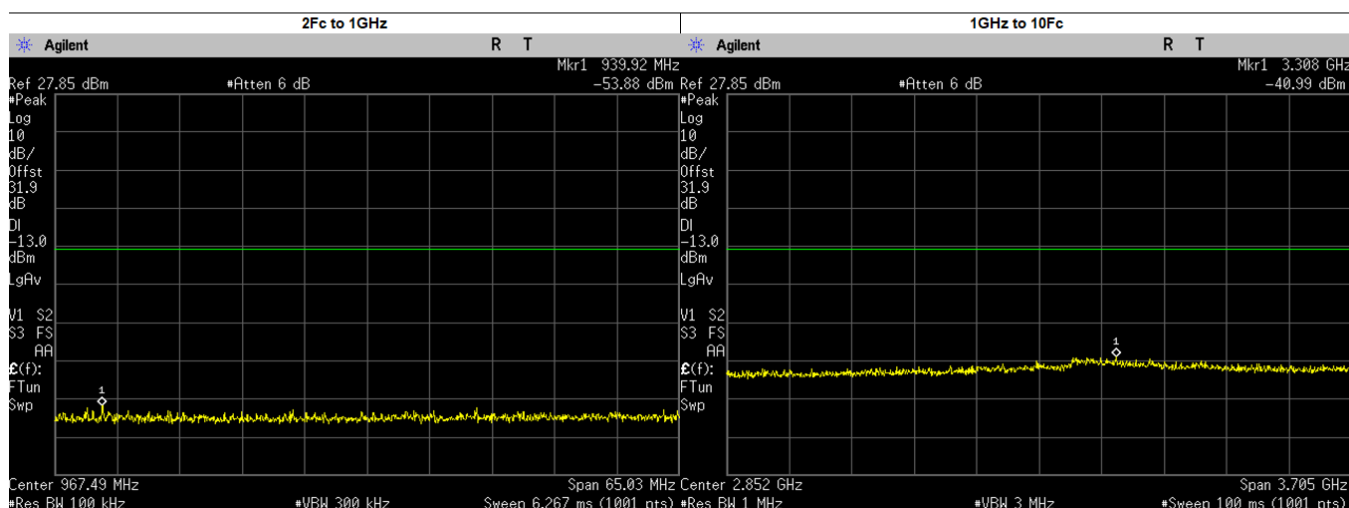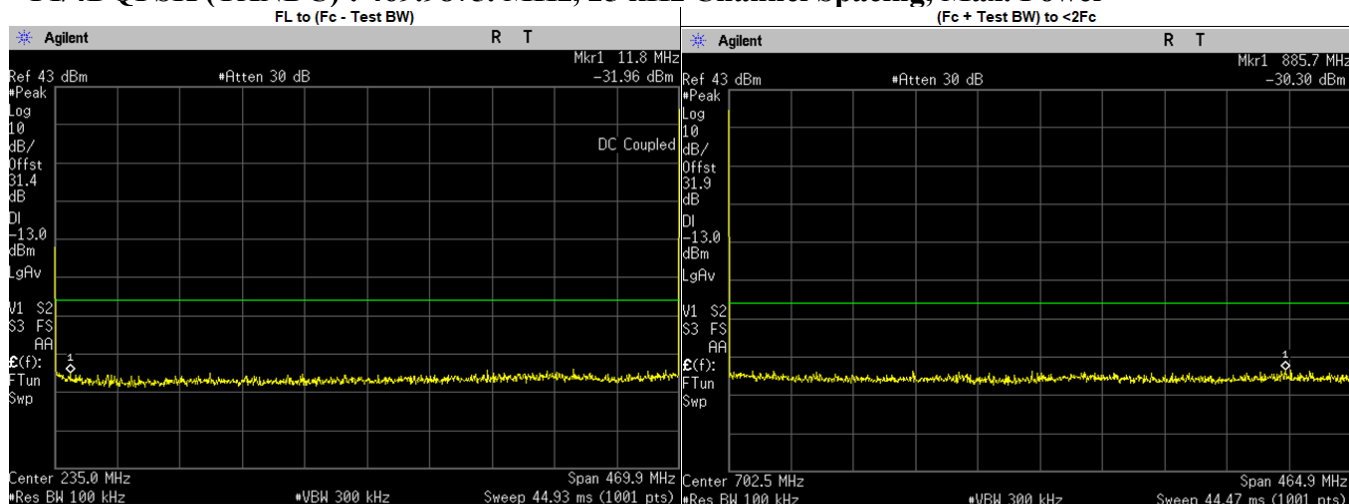

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	11.8000	-31.9630	-13.00	PASS
(Fc + Test BW) to <2Fc	885.6923	-30.3000	-13.00	PASS
2Fc to 1GHz	939.9169	-53.8800	-13.00	PASS
	939.9750	-53.8899	-13.00	PASS
1GHz to 10Fc	3308.1370	-40.9900	-13.00	PASS
	1409.9630	-45.5297	-13.00	PASS
	1879.9500	-44.8895	-13.00	PASS
	2349.9370	-44.9990	-13.00	PASS
	2819.9250	-43.6035	-13.00	PASS
	3289.9120	-42.3113	-13.00	PASS
	3759.9000	-43.9807	-13.00	PASS
	4229.8870	-44.7055	-13.00	PASS
	4699.8750	-44.9481	-13.00	PASS

6.10.4. Test Limit


Table below summarized the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least

Channel Spacing	Part 22	Part 24D	Part 74	Part 80	Part 90 (UHF, VHF, 800, 900)	Part 90 (700)
12.5kHz	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	Not Applicable	50 + log ₁₀ (P) (-20 dBm)	43 + log ₁₀ (P) (-13 dBm)
25kHz		Not Applicable		43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)

Channel Spacing	RSS 134	RSS 182	RSS 119 (UHF, VHF, 800, 900)	RSS 119 (700)
12.5kHz	43 + log ₁₀ (P) (-13 dBm)	Not Applicable	50 + log ₁₀ (P) (-20 dBm)	43 + log ₁₀ (P) (-13 dBm)
25kHz	Not Applicable	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)

6.11. Radiated Spurious Emission

6.11.1. Test Setup

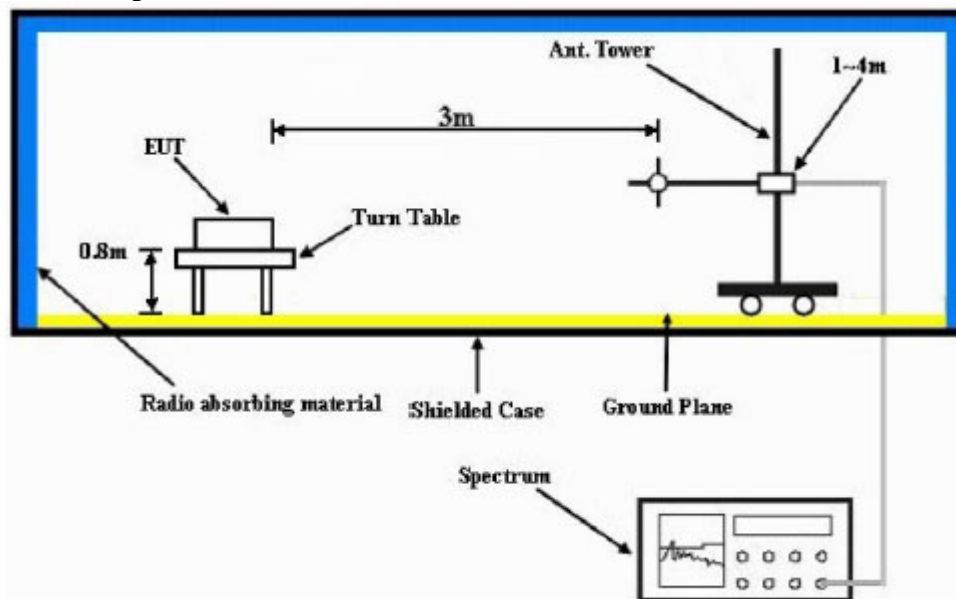

- 1) The Resolution Bandwidth for scanning Radiated Emission below 1 GHz is 100 kHz with Video Bandwidth = 300 kHz and Resolution Bandwidth for above 1 GHz is 1 MHz with Video Bandwidth = 3 MHz. Detector mode is positive peak.
- 2) In the semi- anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height (for $F_c < 1\text{GHz}$) or 1.5m height (for $F_c > 1\text{GHz}$) of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- 3) The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.
- 4) Final Radiated Spurious Emission = “Read Value” + Measured substitution value.

6.11.2. Test Result (Analog)


Not Applicable.

6.11.3. Test Result (Digital)

SAC Transmitter Radiated Emission:
Model Number: AZH77PCN6TZ5AN S/N: 767TXV0821 SR:19613-EMC-00215
Battery Part No: PMNN4802A Accy Part No: AN000362A01, AN000401A01
Test Mode: TX
406.125000 MHz (Not for FCC review) 25 kHz 3.00 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
812.2500	-13.0000	-85.6258 **	-85.4780 **
1218.3750	-13.0000	-48.1000 *	-48.5800 *
1624.5000	-13.0000	-43.3800 *	-47.6400 *
2030.6250	-13.0000	-58.7983 **	-58.0763 **
2436.7500	-13.0000	-56.7055 **	-56.5263 **
2842.8750	-13.0000	-53.4635 **	-55.1931 **
3249.0000	-13.0000	-52.7090 **	-53.3687 **
3655.1250	-13.0000	-52.6646 **	-54.3392 **
4061.2500	-13.0000	-52.6411 **	-52.2051 **

RADIATED SPURIOUS EMISSIONS

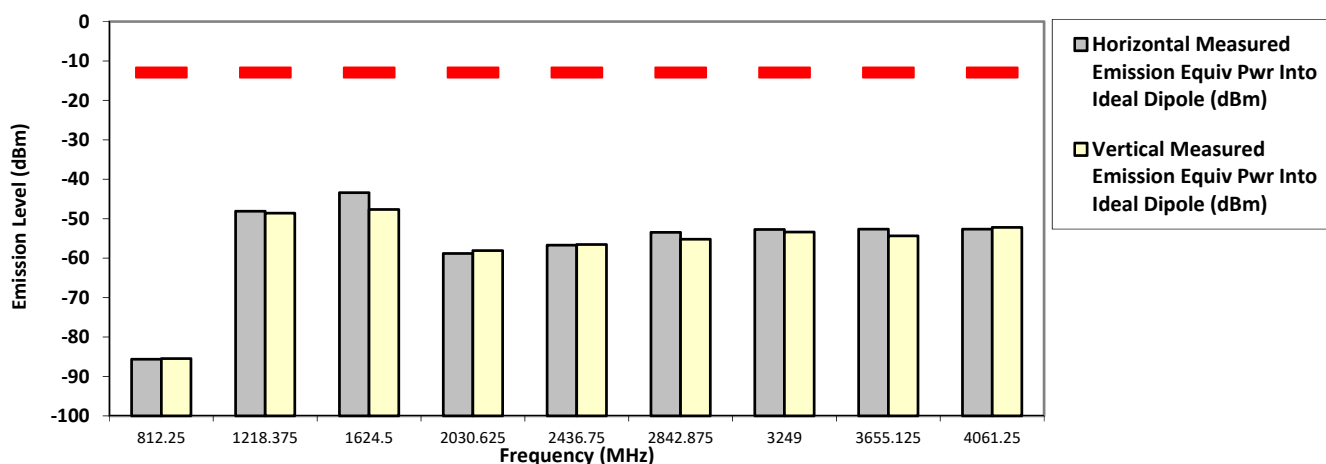

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Aiman Sun, 12 Dec, 2021


Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.0 Hum(%RH): 69.8

Remarks: Passed Results Marginal Results Failed Results

SAC Transmitter Radiated Emission:
Model Number: AZH77PCN6TZ5AN **S/N:** 767TXV0821 **SR:** 19613-EMC-00215
Battery Part No: PMNN4802A **Accy Part No:** AN000362A01, AN000401A01
Test Mode: TX
418.012500 MHz (Not for FCC review) **25 kHz** **3.00 Watt(s) /Max Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
836.0250	-13.0000	-84.8977 **	-86.1731 **
1254.0375	-13.0000	-46.4100 *	-41.8300 *
1672.0500	-13.0000	-45.4100 *	-46.5600 *
2090.0625	-13.0000	-57.3768 **	-56.0495 **
2508.0750	-13.0000	-56.6666 **	-57.6316 **
2926.0875	-13.0000	-54.8954 **	-53.9222 **
3344.1000	-13.0000	-54.6527 **	-53.8424 **
3762.1125	-13.0000	-53.4100 **	-54.5920 **
4180.1250	-13.0000	-52.1572 **	-52.3450 **

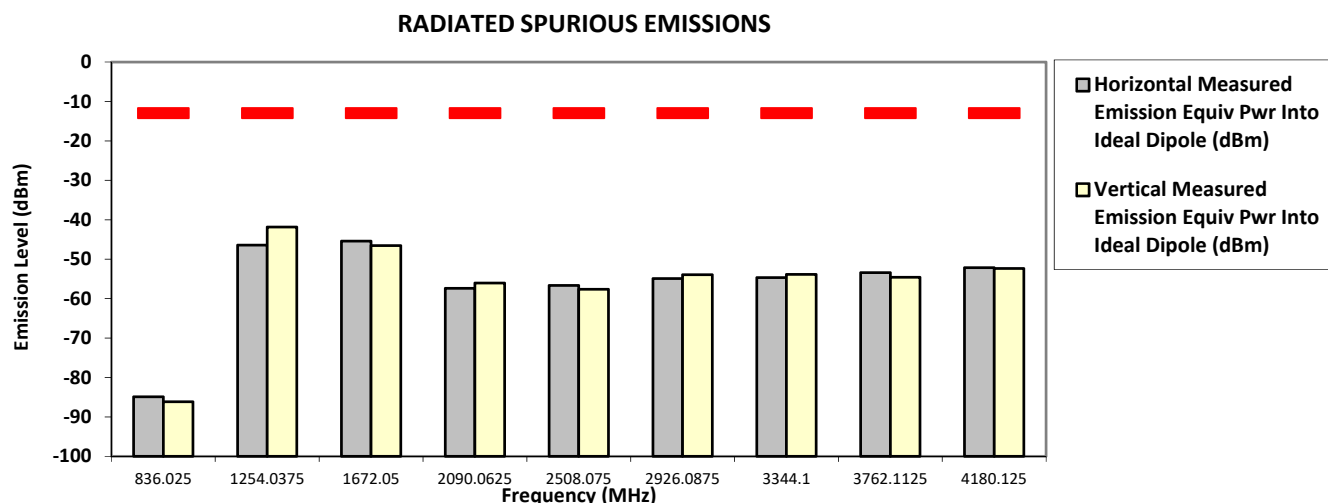

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Aiman Sun, 12 Dec, 2021


Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.0 Hum(%RH): 69.8

Remarks: Passed Results Marginal Results Failed Results

SAC Transmitter Radiated Emission:
Model Number: AZH77PCN6TZ5AN **S/N:** 767TXV0821 **SR:** 19613-EMC-00215
Battery Part No: PMNN4802A **Accy Part No:** AN000362A01, AN000401A01
Test Mode: TX
429.975000 MHz (Not for FCC review) **25 kHz** **3.00 Watt(s) /Max Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
859.9500	-13.0000	-83.5429 **	-84.5766 **
1289.9250	-13.0000	-51.8500 *	-49.7800 *
1446.0800	-13.0000	-50.4000 *	-45.3700 *
1719.9000	-13.0000	-41.5600 *	-36.8300 *
1972.0500	-13.0000	-44.1700 *	-42.7200 *
2149.8750	-13.0000	-56.3885 **	-58.3468 **
2579.8500	-13.0000	-55.2726 **	-55.3878 **
3009.8250	-13.0000	-55.6033 **	-54.8215 **
3439.8000	-13.0000	-54.6603 **	-54.8288 **
3869.7750	-13.0000	-52.2241 **	-52.1063 **
4299.7500	-13.0000	-52.2411 **	-52.2827 **

RADIATED SPURIOUS EMISSIONS

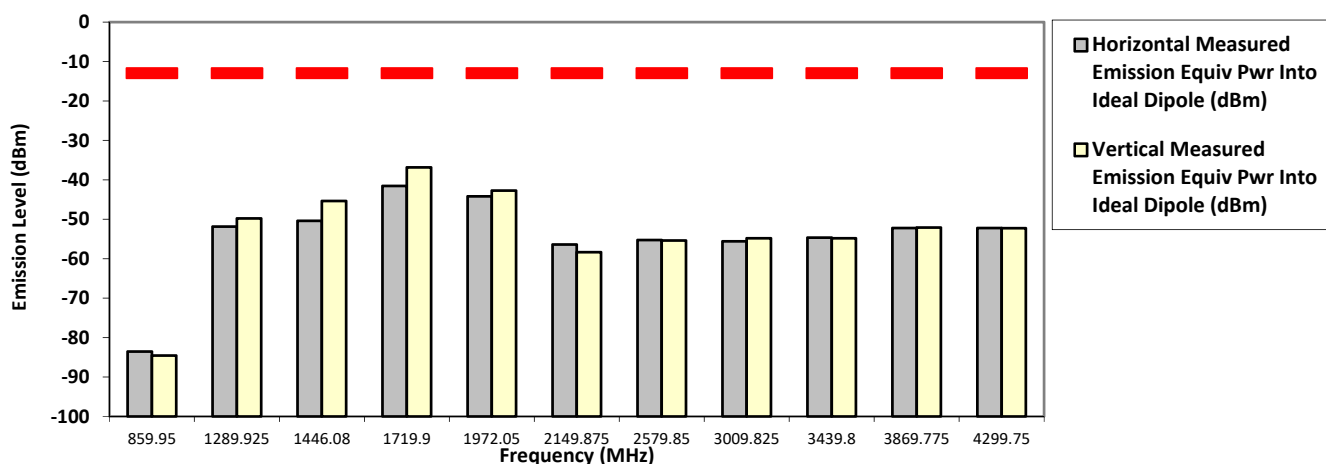


The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Aiman Sun, 12 Dec, 2021

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.0 Hum(%RH): 69.8

Remarks: Passed Results Marginal Results Failed Results

SAC Transmitter Radiated Emission:
Model Number: AZH77PCN6TZ5AN S/N: 767TXV0821 SR:19613-EMC-00215
Battery Part No: PMNN4802A Accy Part No: AN000362A01, AN000401A01
Test Mode: TX
450.025000 MHz 25 kHz 3.00 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
900.0500	-13.0000	-85.2566 **	-85.1134 **
1350.0750	-13.0000	-49.2800 *	-48.6800 *
1800.1000	-13.0000	-42.6100 *	-43.6600 *
2250.1250	-13.0000	-57.5596 **	-58.4637 **
2270.0400	-13.0000	-45.7700 *	-39.7300 *
2345.0300	-13.0000	-48.9700 *	-46.3100 *
2700.1500	-13.0000	-54.8002 **	-56.6100 **
3150.1750	-13.0000	-53.3931 **	-52.4709 **
3600.2000	-13.0000	-53.5360 **	-54.3959 **
4050.2250	-13.0000	-52.3594 **	-52.2025 **
4500.2500	-13.0000	-51.1172 **	-50.3926 **

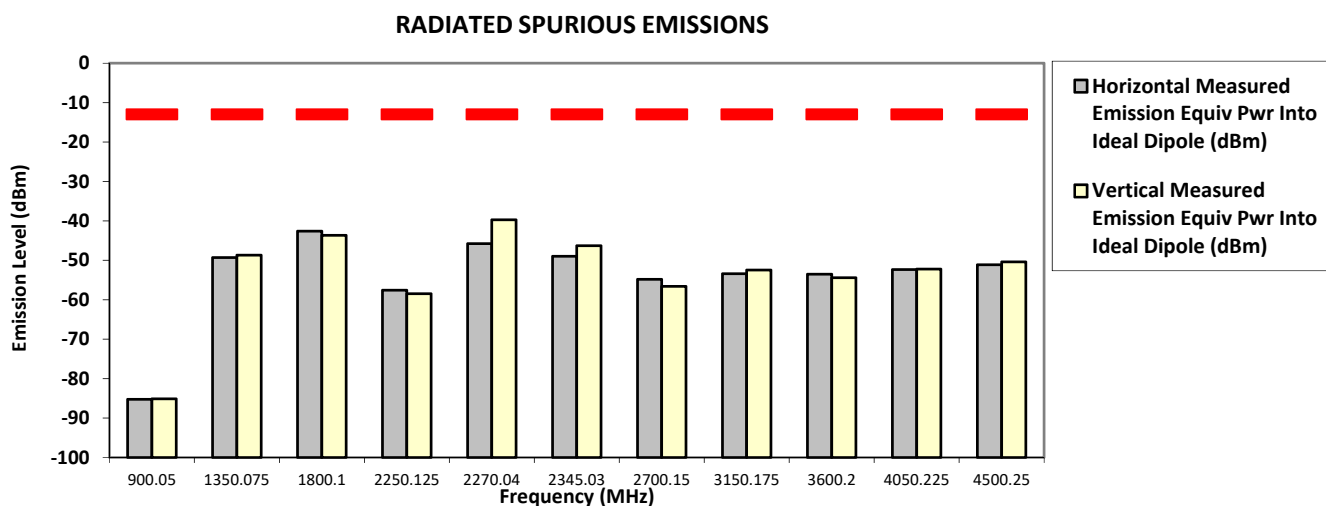

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Aiman Sun, 12 Dec, 2021

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.0 Hum(%RH): 69.8


Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:
Model Number: AZH77PCN6TZ5AN S/N: 767TXV0821 SR:19613-EMC-00215
Battery Part No: PMNN4802A Accy Part No: AN000362A01, AN000401A01
Test Mode: TX
460.025000 MHz 25 kHz 3.00 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
920.0500	-13.0000	-82.8264 **	-83.5335 **
1380.0750	-13.0000	-48.0400 *	-47.4000 *
1840.1000	-13.0000	-59.9042 **	-58.4932 **
2300.1250	-13.0000	-58.4983 **	-56.5514 **
2760.1500	-13.0000	-55.3043 **	-56.2740 **
3220.1750	-13.0000	-53.6400 **	-53.5105 **
3680.2000	-13.0000	-53.7938 **	-52.2297 **
4140.2250	-13.0000	-52.9935 **	-52.2575 **
4600.2500	-13.0000	-51.1502 **	-51.1221 **

RADIATED SPURIOUS EMISSIONS

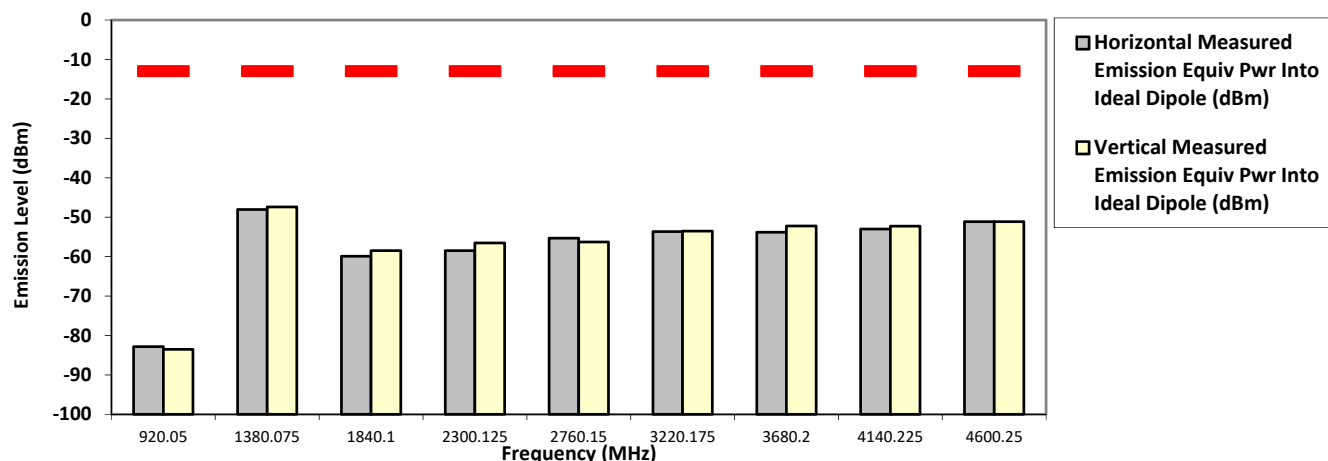

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Aiman Sun, 12 Dec, 2021


Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.0 Hum(%RH): 69.8

Remarks: Passed Results Marginal Results Failed Results

SAC Transmitter Radiated Emission:
Model Number: AZH77PCN6TZ5AN **S/N:** 767TXV0821 **SR:** 19613-EMC-00215
Battery Part No: PMNN4802A **Accy Part No:** AN000362A01, AN000401A01
Test Mode: TX
469.987500 MHz **25 kHz** **3.00 Watt(s) /Max Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
939.9750	-13.0000	-83.0823 **	-84.4142 **
1409.9625	-13.0000	-46.2700 *	-50.2000 *
1879.9500	-13.0000	-59.1762 **	-56.9476 **
1972.0500	-13.0000	-48.3800 *	-45.3700 *
2349.9375	-13.0000	-56.3195 **	-56.9472 **
2819.9250	-13.0000	-55.7172 **	-53.5980 **
3289.9125	-13.0000	-52.9741 **	-52.9297 **
3759.9000	-13.0000	-52.7373 **	-53.3735 **
4229.8875	-13.0000	-51.7213 **	-52.4926 **
4699.8750	-13.0000	-49.5900 **	-50.3098 **

RADIATED SPURIOUS EMISSIONS

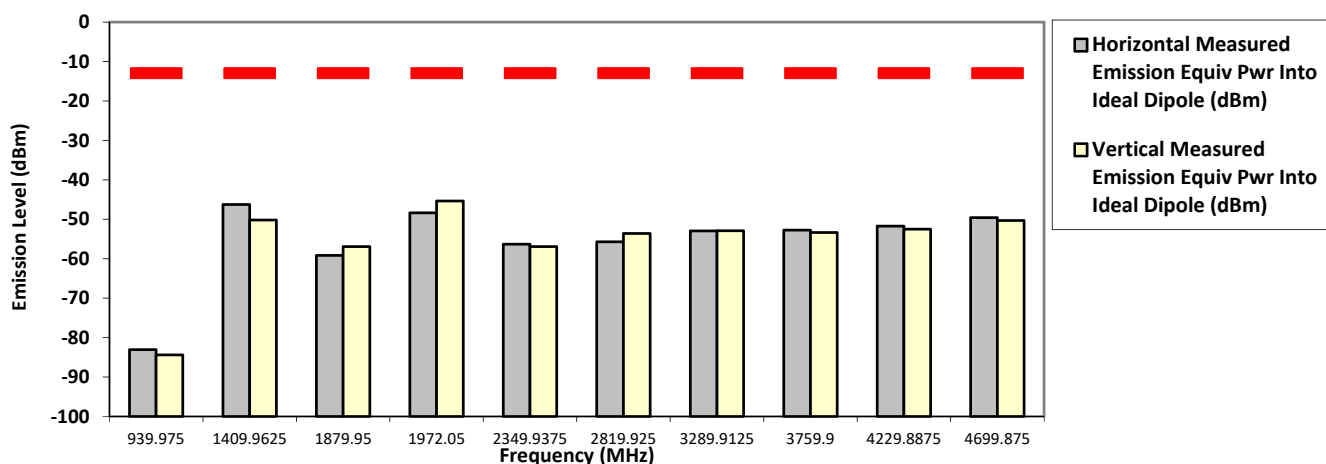

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Aiman Sun, 12 Dec, 2021

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.0 Hum(%RH): 69.8

Remarks: Passed Results Marginal Results Failed Results

6.11.4. Test Limit


Table below summarized the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least

Channel Spacing	Part 22	Part 24D	Part 74	Part 80	Part 90 (UHF, VHF, 800, 900)	Part 90 (700)
12.5kHz	43 + log10(P) (-13 dBm)	43 + log10(P) (-13 dBm)	43 + log10(P) (-13 dBm)	Not Applicable	50 + log10(P) (-20 dBm)	43 + log10(P) (-13 dBm)
25kHz		Not Applicable		43 + log10(P) (-13 dBm)	43 + log10(P) (-13 dBm)	43 + log10(P) (-13 dBm)

Channel Spacing	RSS 134	RSS 182	RSS 119 (UHF, VHF, 800, 900)	RSS 119 (700)
12.5kHz	43 + log10(P) (-13 dBm)	Not Applicable	50 + log10(P) (-20 dBm)	43 + log10(P) (-13 dBm)
25kHz	Not Applicable	43 + log10(P) (-13 dBm)	43 + log10(P) (-13 dBm)	43 + log10(P) (-13 dBm)

6.12. Effective Radiated Power (ERP)

6.12.1. Test Setup

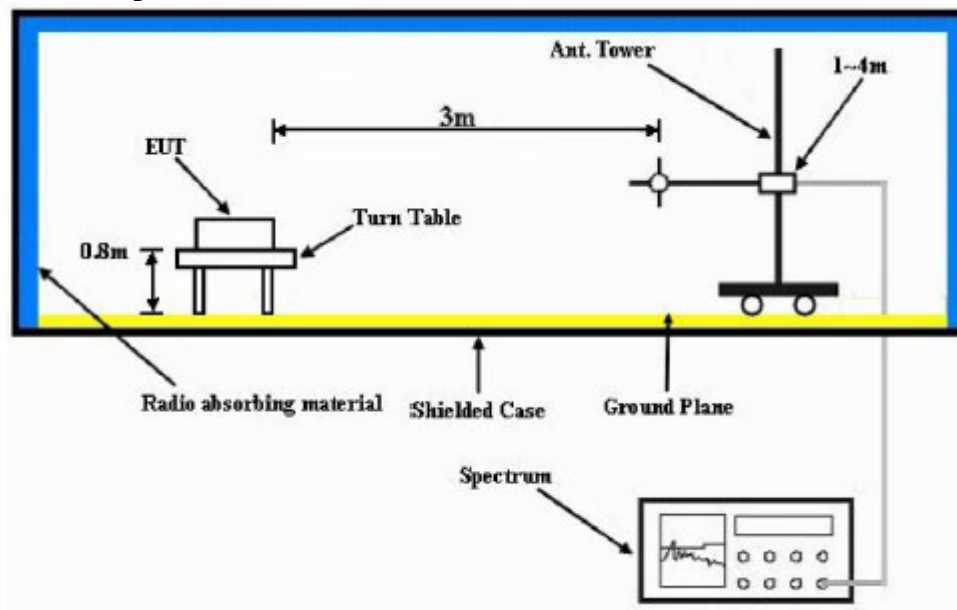

- 1) The Resolution Bandwidth for Equivalent Radiated Power (ERP) below 1 GHz is 100 kHz with Video Bandwidth = 300 kHz and Resolution Bandwidth for EIRP above 1 GHz is 1 MHz with Video Bandwidth = 3 MHz. Detector Mode is RMS.
- 2) In the semi-anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height (for $F_c < 1\text{GHz}$) or 1.5m (for $F_c > 1\text{GHz}$) of Turn Table, rotated the table 45 degree each interval to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power for each degree interval. The “Read Value” is the spectrum reading of maximum power value.
- 3) The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the Measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.

6.12.2. Test Result


Not Applicable.

6.12.3. Test Limit

The maximum output power of the transmitter for mobile stations is 100 watts (20 dB). Power is given in terms of effective radiated power (ERP).

6.13. GNSS (EIRP for 1559 - 1610MHz)

6.13.1. Test Setup

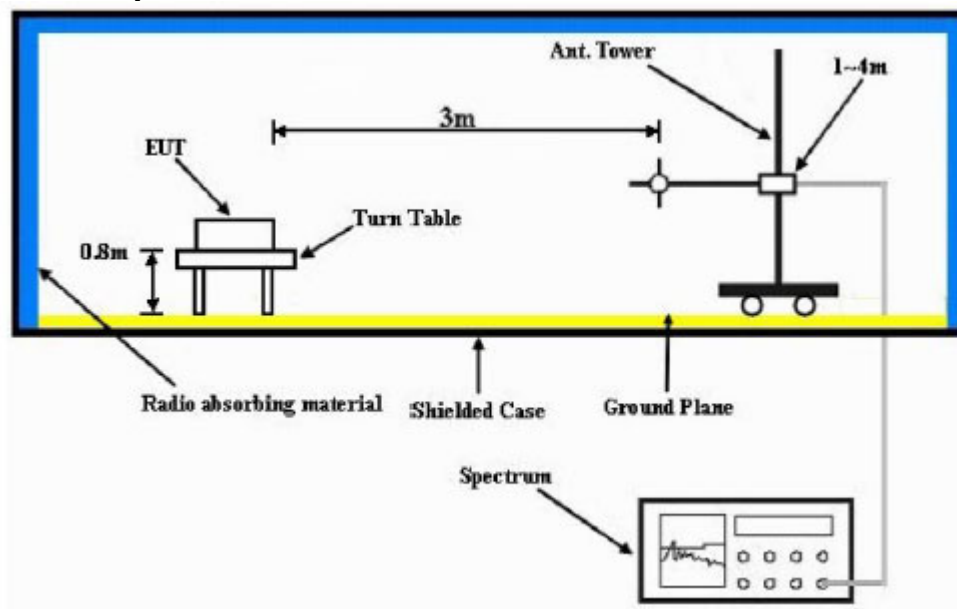

- 4) The Resolution Bandwidth for Equivalent Isotropically Radiated Power (EIRP) below 1 GHz is 100 kHz with Video Bandwidth = 300 kHz and Resolution Bandwidth for EIRP above 1 GHz is 1 MHz with Video Bandwidth = 3 MHz. Detector Mode is RMS.
- 5) In the semi-anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height of Turn Table, rotated the table 45 degree each interval to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power for each degree interval. The “Read Value” is the spectrum reading of maximum power value.
- 6) The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the Measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.
- 7) $EIRP = \text{“Read Value”} + \text{Measured substitution value} + 2.15$.

6.13.1. Test Result

Not Applicable.

6.13.2. Test Limit

For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

~ End of Test Report ~