


FIC

DESERTSTORM JUMPER SETTING V1.3

VGA USB GAME/AUDIO KB/MS COM PRINT

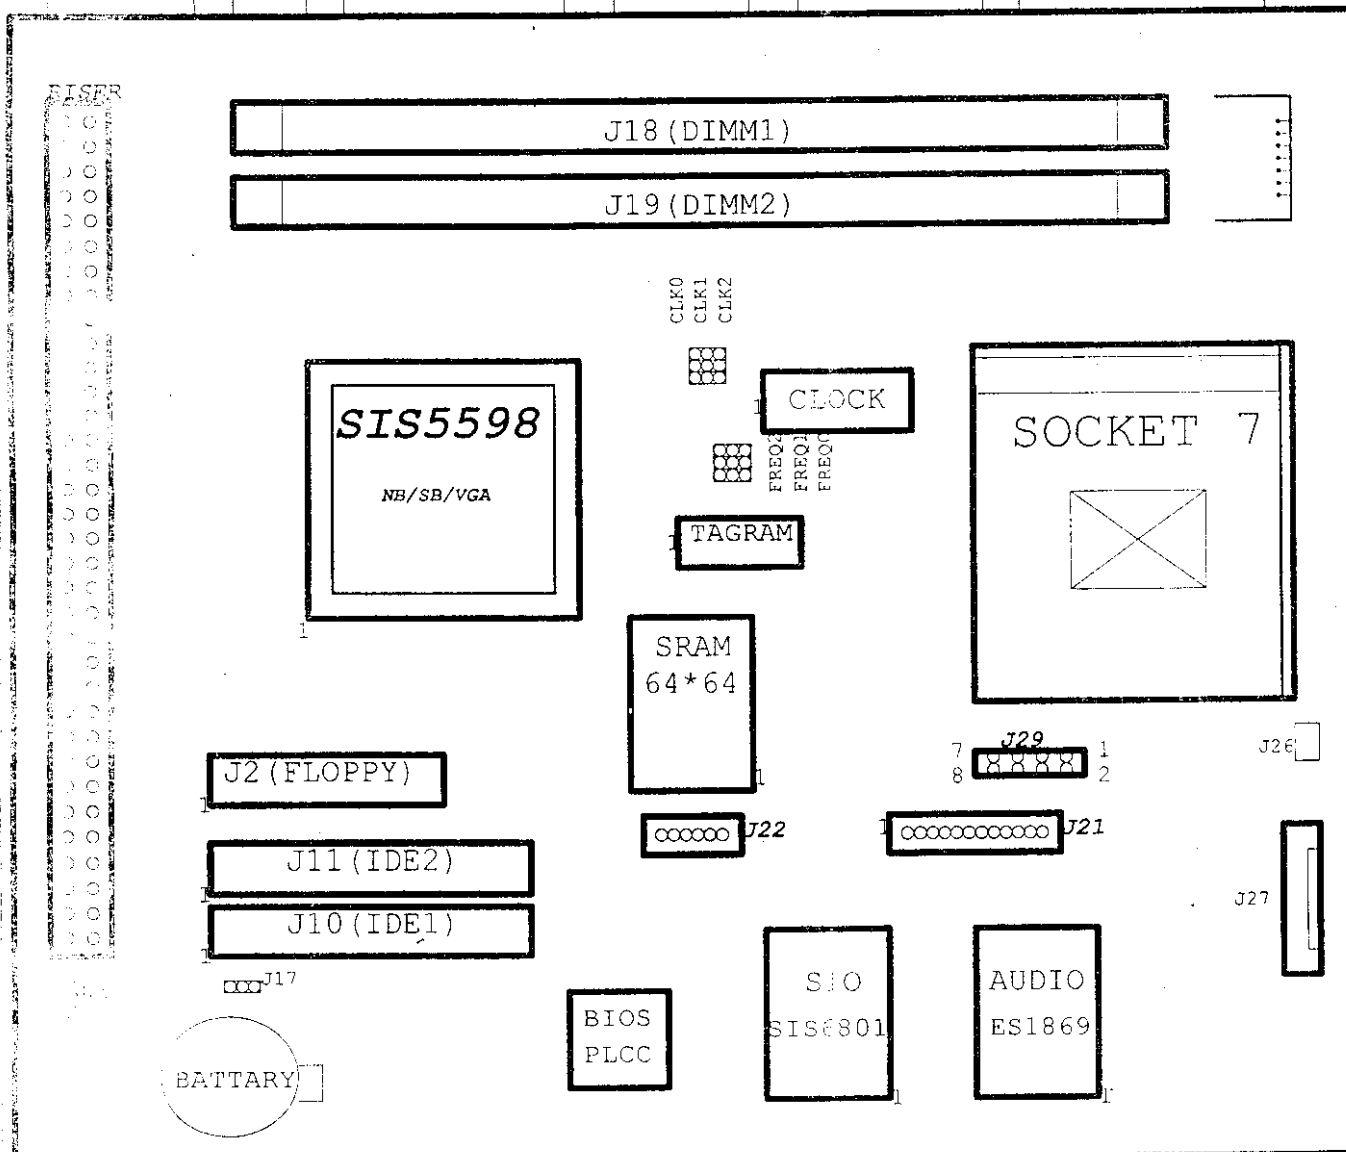

J29

VDD2	1-2	4	5-6	7-8
2.0V	OFF	OFF	OFF	OFF
2.1V	OFF	OFF	OFF	ON
2.2V	OFF	OFF	ON	OFF
2.3V	OFF	OFF	ON	ON
2.4V	OFF	ON	OFF	OFF
2.5V	OFF	ON	OFF	ON
2.6V	OFF	ON	ON	OFF
2.7V	OFF	ON	ON	ON
2.8V	ON	OFF	OFF	OFF
2.9V	ON	OFF	OFF	ON
3.0V	ON	OFF	ON	OFF
3.1V	ON	OFF	ON	ON
3.2V	ON	ON	OFF	OFF
3.3V	ON	ON	OFF	ON
3.4V	ON	ON	ON	OFF
3.5V	ON	ON	ON	ON

FREQ0	FREQ1	FREQ2	105C/M2/K6	P54C/K6
1-2	1-2	1-2	3.5X	1.5X
2-3	1-2	1-2	2X	2X
2-3	2-3	1-2	2.5X	2.5X
1-2	2-3	1-2	3X	3X
2-3	1-2	2-3	4X	
2-3	1-3	2-3	4.5X	
1-2	1-3	2-3	5X	
1-2	1-2	3-3	5.5X	

CLOCK TABLE

Input	Address	CPU, SDRAM	PCI Clock
CLK2	CLK1	CLK0 Clock (MHz)	(MHz)
0	0	0	50.0
0	0	1	75.0
0	1	0	93.3
0	1	1	68.5
1	0	0	55.0
1	0	1	75.0
1	1	0	60.0
1	1	1	66.8

FIC DESERTSTORM
JUMPER SETTING

Document Number: **16550**
Date: Friday, July 17, 1998

J17	1-2	NORMAL
	2-3	CLEAR CMOS

J27	BOTTOM/B CONNECTOR
-----	-----------------------

J25	LEFT CHANNEL
J26	RIGHT CHANNEL