

# **FCC Test Report**

Report No.: AGC13729250401FR01

FCC ID : 2AT8X-FOKUSAMADEUS

**APPLICATION PURPOSE**: Original Equipment

**PRODUCT DESIGNATION**: TRUE WIRELESS STEREO EARPHONE

**BRAND NAME** : Noble

**MODEL NAME** : FoKus Amadeus

**APPLICANT**: Noble Hifi. LLC

**DATE OF ISSUE** : Apr. 27, 2025

**STANDARD(S)** : FCC Part 15 Subpart C §15.247

**REPORT VERSION**: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Page 2 of 82

# **Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Apr. 27, 2025	Valid	Initial Release



# **Table of Contents**


1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Test Frequency List	6
2.3 Related Submittal(S) / Grant (S)	7
2.4 Test Methodology	
2.5 Receiver Input Bandwidth	
2.6 Equally Average Use of Frequencies And Behaviour	7
2.7 Pseudorandom Frequency Hopping Sequence	
2.8 Special Accessories	
2.9 Equipment Modifications	9
2.10 Antenna Requirement	
3. Test Environment	
3.1 Address of The Test Laboratory	
3.2 Test Facility	
3.3 Environmental Conditions	
3.4 Measurement Uncertainty	
3.5 List of Equipment Used	
4.System Test Configuration	
4.1 EUT Configuration	
4.2 EUT Exercise	
4.3 Configuration of Tested System	14
4.4 Equipment Used in Tested System	
4.5 Summary of Test Results	
5. Description of Test Modes	
6. RF Output Power Measurement	
6.1 Provisions Applicable	
6.2 Measurement Procedure	
6.3 Measurement Setup (Block Diagram of Configuration)	
6.4 Measurement Result	
7. 20dB Bandwidth and 99% Occupied Bandwidth Measurement	
7.1 Provisions Applicable	
7.2 Measurement Procedure	
7.3 Measurement Setup (Block Diagram of Configuration)	
7.4 Measurement Results	
8. Conducted Band Edge and Out-of-Band Emissions	
8.1 Provisions Applicable	
8.2 Measurement Procedure	
8.3 Measurement Setup (Block Diagram of Configuration)	
8 4 Measurement Results	35

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Web: http://www.agccert.com/



9. Radiated Spurious Emission	55
9.1 Measurement Limit	55
9.2 Measurement Procedure	55
9.3 Measurement Setup (Block Diagram of Configuration)	58
9.4 Measurement Result	59
10. Number of Hopping Frequency Measurement	68
10.1 Provisions Applicable	68
10.2 Measurement Procedure	68
10.3 Measurement Setup (Block Diagram of Configuration)	68
10.4 Measurement Result	
11. Time of Occupancy (Dwell Time) Measurement	71
11.1 Provisions Applicable	
11.2 Measurement Procedure	71
11.3 Measurement Setup (Block Diagram of Configuration)	71
11.4 Measurement Result	71
12. Frequency Separation Measurement	75
12.1 Provisions Applicable	75
12.2 Measurement Procedure	75
12.3 Measurement Setup (Block Diagram of Configuration)	75
12.4 Measurement Result	75
13. AC Power Line Conducted Emission Test	77
13.1 Measurement Limit	77
13.2 Measurement Setup (Block Diagram of Configuration)	77
13.3 Preliminary Procedure of Line Conducted Emission Test	78
13.4 Final Procedure of Line Conducted Emission Test	78
13.5 Measurement Results	79
Appendix I: Photographs of Test Setup	81
Appendix II: Photographs of Test EUT	81





# 1. General Information

Applicant	Noble Hifi. LLC
Address	109 State Hwy. 110 S Whitehouse, Texas 75791, United States
Manufacturer	THE DARK HORSE ACOUSTICS TECHNOLOGY CO., LTD
Address	501, No.1, Sports Road 2, Pinghuan Community, MaRuan Street, Pingshan District, SHENZHEN, 518118, CHINA
Factory	THE DARK HORSE ACOUSTICS TECHNOLOGY CO., LTD
Address	501, No.1, Sports Road 2, Pinghuan Community, MaRuan Street, Pingshan District, SHENZHEN, 518118, CHINA
Product Designation	TRUE WIRELESS STEREO EARPHONE
Brand Name	Noble
Test Model	FoKus Amadeus
Series Model	N/A
Declaration of Difference	N/A
Date of receipt of test item	Apr. 03 , 2025
Date of Test	Apr. 08, 2025~ Apr. 14, 2025
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-FCC-BR_EDR-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Cocili	
	Cici Li (Project Engineer)	Apr. 27, 2025
Reviewed By	Calvin Lin	
	Calvin Liu (Reviewer)	Apr. 27, 2025
Approved By	Angole li	
	Angela Li (Authorized Officer)	Apr. 27, 2025



Page 6 of 82

## 2. Product Information

# 2.1 Product Technical Description

Technology Type	Classic Bluetooth	
Frequency Band	2400M-2483.5MHz	
Operation Frequency Range	2402MHz-2480MHz	
Bluetooth Version	V5.4	
Modulation Type	BR ⊠GFSK, EDR ⊠π /4-DQPSK, ⊠8DPSK	
Number of channels	79 of Channels	
Channel Separation	1 MHz	
Maximum Transmitter Power	3.856dBm	
Hardware Version	V1.0	
Software Version	DZ-2501A_20250412_V0.0.3	
Antenna Designation	FPC Antenna	
Antenna Gain	Right Earphone:-2.52dBi; Left Earphone:-2.22dBi	
	DC 3.6V by battery	
Nete		

#### Note:

The EUT comprises left and right channel earphones, both are the same. The RF output power of each earphone has been tested and recorded in the report. For other test items, the right earphone has been tested and recorded in this report, which is the worst case.

# 2.2 Test Frequency List

Frequency Band	Channel Number	Test Frequency			
	0	2402 MHz			
	1	2403 MHz			
2400~2483.5MHz	:	·			
	39	2441MHz			
	:	:			
	77	2479 MHz			
	78	2480 MHz			
Note: f = 2402+1*k MHz, k=0,, 78; "f" is the operating frequency (MHz); "k" is the operating channel.					



Page 7 of 82

## 2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: 2AT8X-FOKUSAMADEUS, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

## 2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title		
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations		
2	FCC 47 CFR Part 15 Radio Frequency Devices			
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices		
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules		

#### 2.5 Receiver Input Bandwidth

The input bandwidth of the receiver is 1.3MHz, in every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally, the type of connection (e.g. single of multi slot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also, the slave of the connection will use these settings. Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

#### 2.6 Equally Average Use of Frequencies and Behaviour.

The generation of the hopping sequence in connection mode depends essentially on two input values:

- 1. LAP/UAP of the master of the connection.
- 2. Internal master clock.


The LAP (lower address part) are the 24 LSB's of the 48 BD ADDRESS. The BD ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24MSB's of the 48BD ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For behavior action with other units only offset is used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day(23h30).

In most case it is implemented as 28 bits counter. For the deriving of the hopping sequence the entire. LAP (24 bits),4LSB's(4bits) (Input 1) and the 27MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate the Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behavior:

The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended. The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer (and it Cannot be shorter) than the minimum resolution of the clock(312.5us). The hopping sequence will always differ from the first one.






## 2.7 Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: 29 1 = 511 bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of The PRBS Sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:



Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



Page 9 of 82

## 2.8 Special Accessories

Not available for this EUT intended for grant.

## 2.9 Equipment Modifications

Not available for this EUT intended for grant.

## 2.10 Antenna Requirement

## Standard Requirement

#### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

## 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

#### **EUT Antenna**

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is -2.52dbi for right earphone and -2.22dbi for left earphone.



Page 10 of 82

#### 3. Test Environment

# 3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

## 3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

# CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories.)

## A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

## FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

## IC-Registration No.: 24842(CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 11 of 82

## 3.3 Environmental Conditions

	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106
Power supply	DC 3.6V

# 3.4 Measurement Uncertainty

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%

Item	Measurement Uncertainty		
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$		
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$		
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$		
Uncertainty of total RF Power, Conducted	$U_c = \pm 0.8 \text{ dB}$		
Uncertainty of RF Power Density, Conducted	$U_c = \pm 2.6 \text{ dB}$		
Uncertainty of Spurious Emissions, Conducted	$U_c = \pm 2 \%$		
Uncertainty of Occupied Channel Bandwidth	U <sub>c</sub> = ±2 %		
Uncertainty of Dwell Time	U <sub>c</sub> = ±2 %		




Page 12 of 82

# 3.5 List of Equipment Used

• F	RF Conducted Test System							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
$\boxtimes$	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2024-05-24	2025-05-23	
$\boxtimes$	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2025-01-14	2026-01-13	
$\boxtimes$	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2025-01-14	2026-01-13	
$\boxtimes$	AGC-ER-A007	6dB Fixed Attenuator	Mini circuits	BW-S6-2W263A+	N/A	2025-01-30	2026-01-29	
$\boxtimes$	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2024-05-23	2025-05-22	
$\boxtimes$	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A	
	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A	

• F	Radiated Spurious Emission						
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
$\boxtimes$	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	100096	2025-01-14	2026-01-13
$\boxtimes$	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23
	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27
$\boxtimes$	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04
$\boxtimes$	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2025-03-14	2027-03-13
	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-05-24	2025-05-23
$\boxtimes$	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23
	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2024-07-24	2026-07-23
$\boxtimes$	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2024-05-23	2025-05-22
$\boxtimes$	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08

<ul><li>A</li></ul>	AC Power Line Conducted Emission								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
$\boxtimes$	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2024-05-28	2025-05-27		
$\boxtimes$	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2025-06-08		
	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2024-05-28	2025-05-27		





• Tes	Test Software							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information			
$\boxtimes$	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71			
$\boxtimes$	AGC-EM-S003	RE Test System	FARA	EZ-EMC	VRA-03A			
	AGC-EM-S004	RE Test System	Tonscend	TS+Ver2.1(JS32-RE)	4.0.0.0			
$\boxtimes$	AGC-ER-S012	BT/WIFI Test System	Tonscend	JS1120-2	2.6			
	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0			



Page 14 of 82

# 4. System Test Configuration

# 4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### 4.2 EUT Exercise


The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

## 4.3 Configuration of Tested System

Radiated Emission Configure:



Conducted Emission Configure:



## 4.4 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement:

☐ Test Accessories Come From The Laboratory

No	Equipme nt	Manufactu rer	Model No.	Specification Information	Cable
·	Control	-			
1	Box	RISYM	USB-TTL		
				Input(AC):100V-240V 50/60Hz 2.4A	
2	Adapter	Huawei	HW-200440	Output(DC):USB-C(5V/3A;9V/3A;10V/4A;11V/6A;12V/3A;	1.0m
	Auaptei	Tuawei	C00	15V/3A;20V4.4A)	unshielded
				USB-A(5V/2A;10V/4A;11V/6A;20V/4.4A)	

☐ Test Accessories Come From The Manufacturer

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1		-			
2					



Page 15 of 82

## 4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(1)	RF Output Power	Pass
3	§15.247 (a)(1)	20 dB Bandwidth	Pass
4	§15.247 (d)	Conducted Band Edge and Out-of-Band Emissions	Pass
5	§15.209	Radiated Spurious Emission	Pass
6	§15.247 (a)(1)(iii)	Number of Hopping Frequency	Pass
7	§15.247 (a)(1)(iii)	Time of Occupancy	Pass
8	§15.247 (a)(1)	Frequency Separation	Pass
9	§15.207	AC Power Line Conducted Emission	Pass




# 5. Description of Test Modes

Summary table of Test Cases					
Test Item	Data Rate / Modulation				
rest item	Bluetooth – BR_EDR (GFSK/π /4-DQPSK/8DPSK)				
Radiated & Conducted Test Cases	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps (Battery powered or AC/DC adapter) Mode 2: Bluetooth Tx CH39_2441 MHz_1Mbps (Battery powered or AC/DC adapter) Mode 3: Bluetooth Tx CH78_2480 MHz_1Mbps (Battery powered or AC/DC adapter) Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps (Battery powered or AC/DC adapter) Mode 5: Bluetooth Tx CH39_2441 MHz_2Mbps (Battery powered or AC/DC adapter) Mode 6: Bluetooth Tx CH78_2480 MHz_2Mbps (Battery powered or AC/DC adapter) Mode 7: Bluetooth Tx CH00_2402 MHz_3Mbps (Battery powered or AC/DC adapter) Mode 8: Bluetooth Tx CH39_2441 MHz_3Mbps (Battery powered or AC/DC adapter) Mode 9: Bluetooth Tx CH78_2480 MHz_3Mbps (Battery powered or AC/DC adapter) Mode10: Bluetooth Tx Hopping-1Mbps (Battery powered or AC/DC adapter) Mode11: Bluetooth Tx Hopping-2Mbps (Battery powered or AC/DC adapter) Mode12: Bluetooth Tx Hopping-3Mbps (Battery powered or AC/DC adapter)				
AC Conducted Emission	Mode 1: Bluetooth Link + Battery + USB Cable (Charging from AC Adapter)				

#### Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. The battery is full-charged during the test.
- 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 4. For Conducted Test method, a temporary antenna connector is provided by the manufacture.

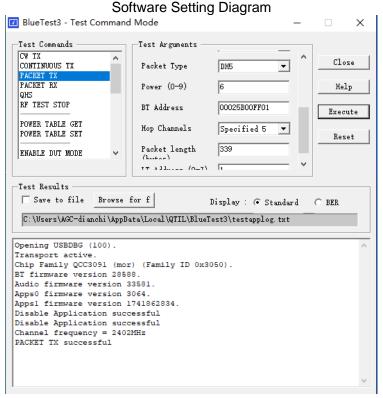



Page 17 of 82

# 6. RF Output Power Measurement

# 6.1 Provisions Applicable

The maximum out power permissible output power is 1 Watt for all frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels.

The maximum out power permissible output power is 0.125 watts for all other frequency hopping systems in the 2400-2483.5 MHz band.

#### **6.2 Measurement Procedure**

# ⊠For Peak power test:


- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- 3. RBW > 20 dB bandwidth of the emission being measured.
- 4. VBW ≥RBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.
- 8. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.


Г	For	Average	e power	test:
---	-----	---------	---------	-------

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required

## 6.3 Measurement Setup (Block Diagram of Configuration)


For Average power test setup

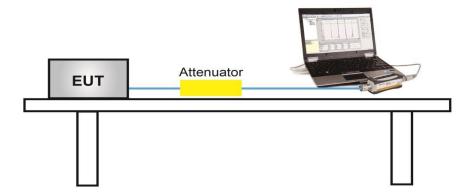






# ⊠For peak power test setup

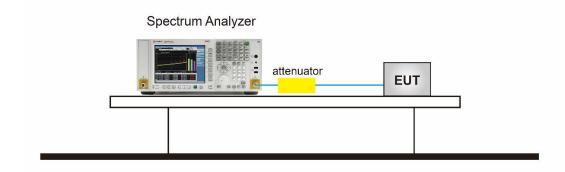


#### 6.4 Measurement Result

Test Data of Conducted Output Power-Right earphone						
Test Mode	Test Frequency (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail		
	2402	1.148	≤21	Pass		
GFSK	2441	2.244	≤21	Pass		
	2480	2.611	≤21	Pass		
	2402	1.356	≤21	Pass		
π /4-DQPSK	2441	2.710	≤21	Pass		
	2480	3.337	≤21	Pass		
8DPSK	2402	1.924	≤21	Pass		
	2441	3.272	≤21	Pass		
	2480	3.856	≤21	Pass		


Test Data of Conducted Output Power-Left earphone						
Test Mode	Test Frequency (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail		
	2402	1.844	≤21	Pass		
GFSK	2441	1.941	≤21	Pass		
	2480	1.513	≤21	Pass		
	2402	2.298	≤21	Pass		
π /4-DQPSK	2441	2.619	≤21	Pass		
	2480	2.348	≤21	Pass		
8DPSK	2402	2.893	≤21	Pass		
	2441	3.200	≤21	Pass		
	2480	2.919	≤21	Pass		






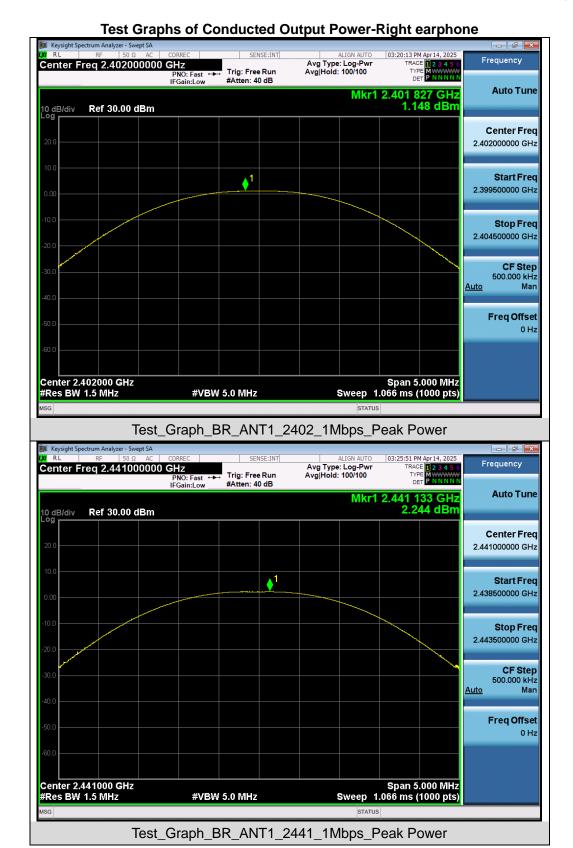



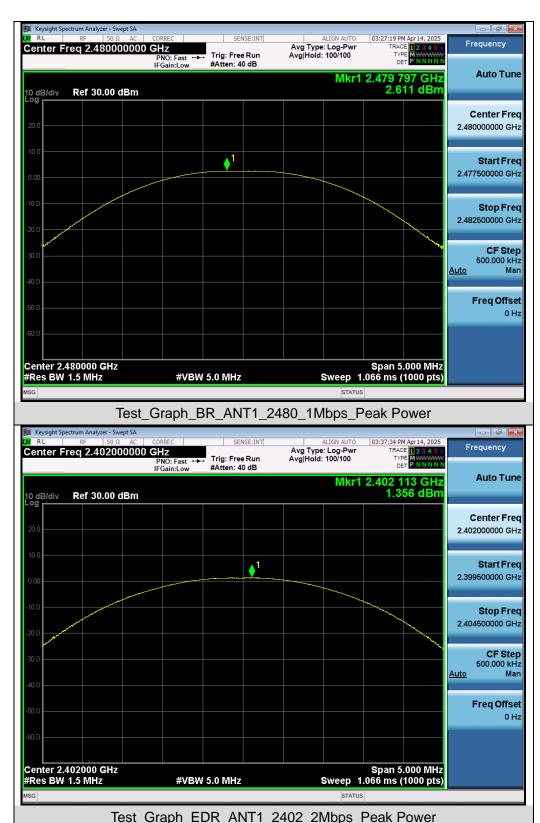




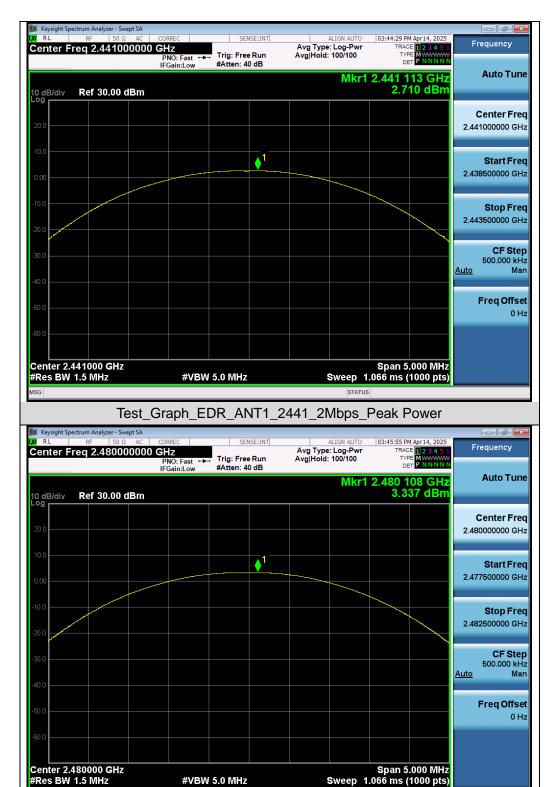

Test Graph EDR ANT1 2480 2Mbps Peak Power



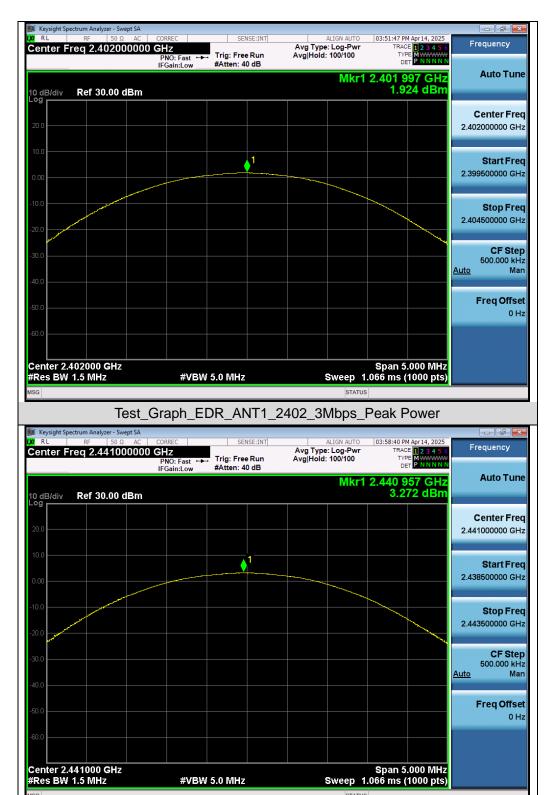

Test Graph EDR ANT1 2441 3Mbps Peak Power







Test Graphs of Conducted Output Power-Left earphone






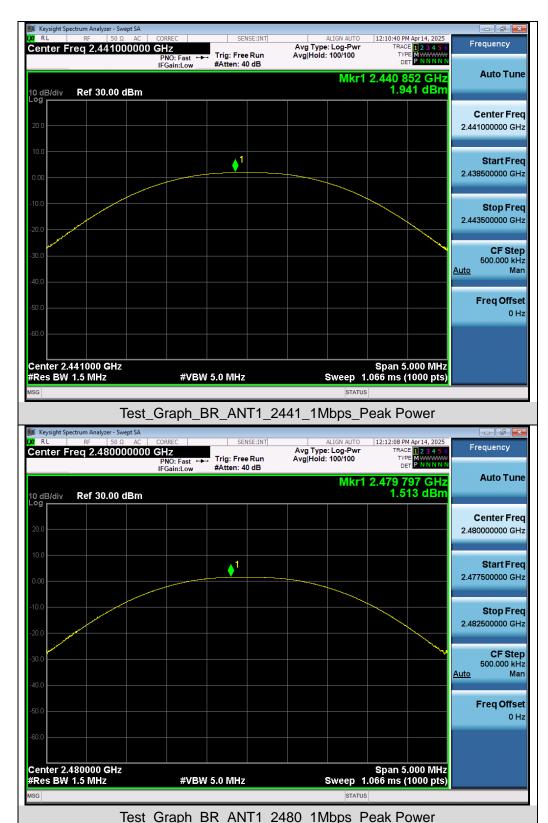




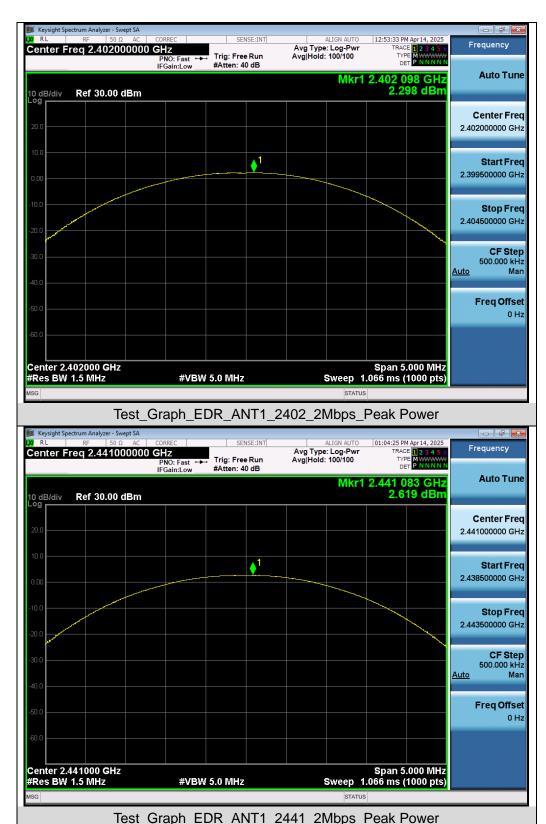



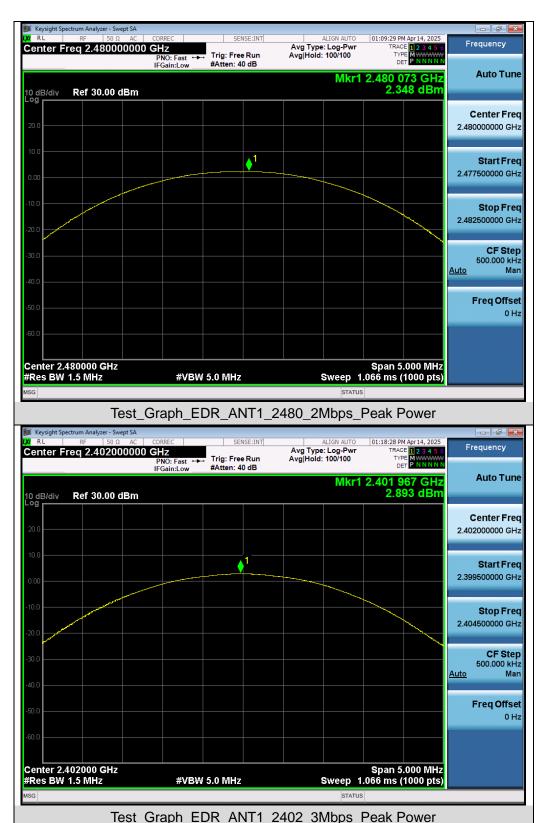



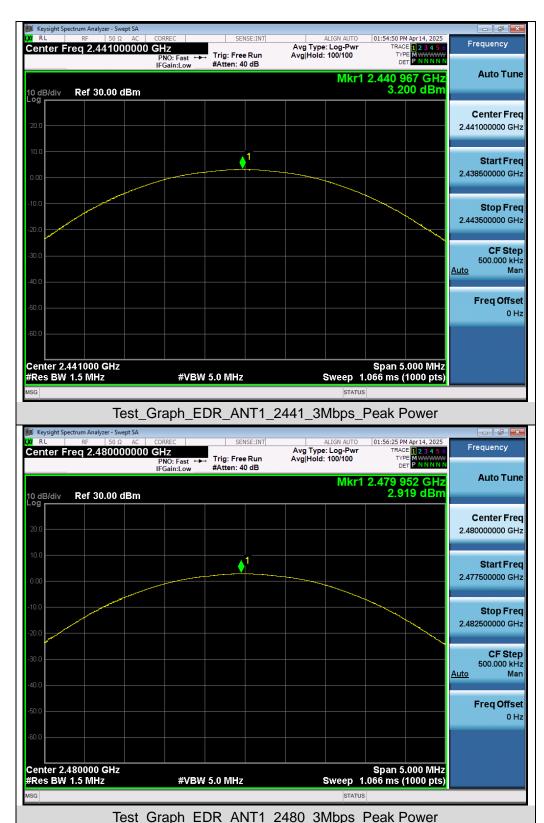



# 7. 20dB Bandwidth and 99% Occupied Bandwidth Measurement

## 7.1 Provisions Applicable


There is no corresponding limit requirement for this test item.

#### 7.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 6.9.2 (20dB BW).

- The 20dB bandwidth spectrum analyzer setting reference is as follows:
- 1. Set RBW ≥ 1% to 5% of the 20dB bandwidth
- 2. VBW = Approximately three times RBW
- 3. Span = Approximately 2 to 5 times the 20dB bandwidth, centered on a hopping channel
- 4. Detector = Peak
- 5. Trace mode = Max hold
- 6. Sweep = Auto couple
- 7. Allow the trace to stabilize
- 8. Measure the maximum width of the emission that is constrained by the frequencies associated
- 9. with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20
- 10. dB relative to the maximum level in the fundamental emission.
- The 99% bandwidth spectrum analyzer setting reference is as follows:
- 1. Span = 1.5 times to 5 times the OBW
- 2. Set RBW = 1% to 5% the OBW
- 3. VBW ≥ 3 × RBW
- 4. Detector = Peak
- 5. Trace mode = Max hold
- 6. Sweep = Auto couple
- 7. Allow the trace was allowed to stabilize

#### 7.3 Measurement Setup (Block Diagram of Configuration)

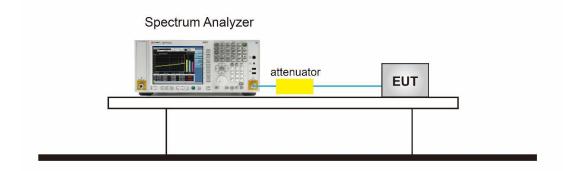




## 7.4 Measurement Results

Test Data of Occupied Bandwidth and -20dB Bandwidth						
Test Mode	Test Frequency (MHz)	99% Occupied Bandwidth (MHz)	-20dB Bandwidth (MHz)	Limits	Pass or Fail	
	2402	0.874	0.957	N/A	Pass	
GFSK	2441	0.872	0.955	N/A	Pass	
	2480	0.870	0.955	N/A	Pass	
	2402	1.187	1.332	N/A	Pass	
π /4-DQPSK	2441	1.188	1.332	N/A	Pass	
	2480	1.190	1.334	N/A	Pass	
	2402	1.187	1.307	N/A	Pass	
8DPSK	2441	1.190	1.309	N/A	Pass	
	2480	1.190	1.308	N/A	Pass	


Test Graphs of Occupied Bandwidth and -20 Bandwidth

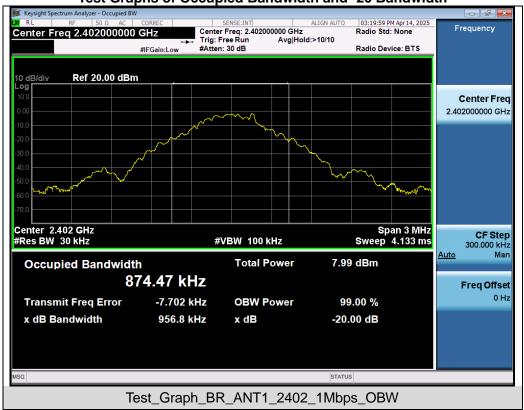









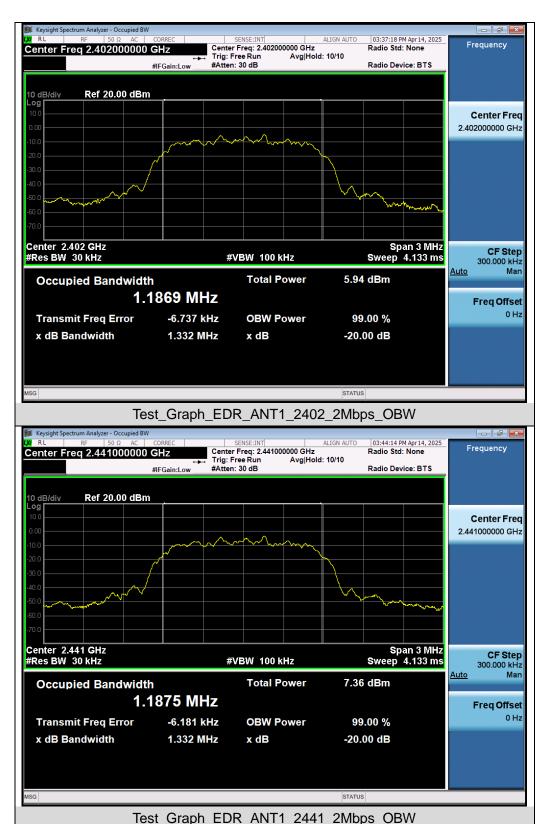



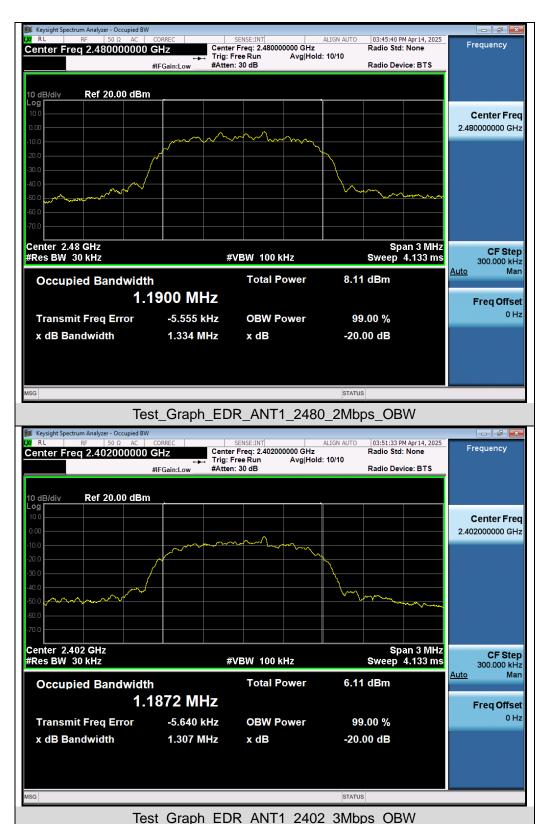



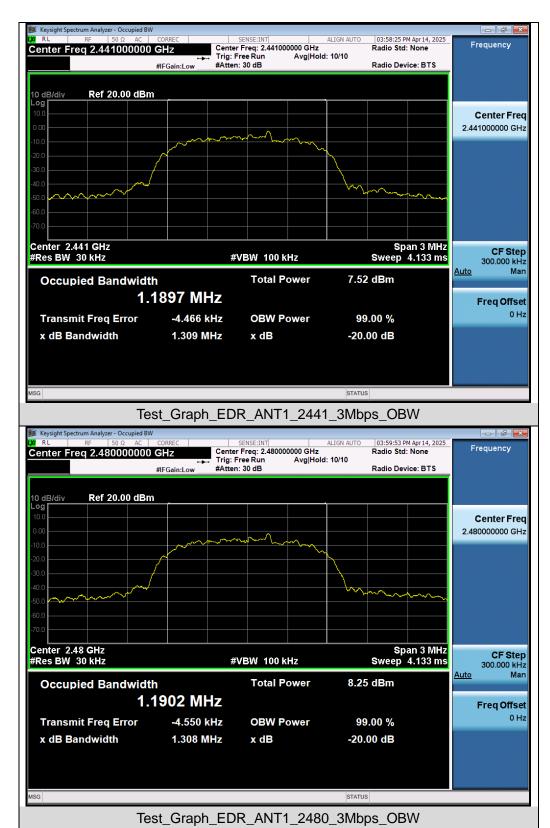



Page 34 of 82

# 8. Conducted Band Edge and Out-of-Band Emissions

# 8.1 Provisions Applicable


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30dB instead of 20dB

#### **8.2 Measurement Procedure**


The testing follows the ANSI C63.10 Section 6.10.4 and 7.8.8:

- Reference level measurement
- 1. Span = Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation.
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Sweep time = Auto couple
- 6. Trace mode = Max hold
- 7. Allow the trace to stabilize. Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission.
- Emission level measurement
- Span = Wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Sweep time = Auto couple
- 6. Trace mode = Max hold
- 7. Trace was allowed to stabilize
- 8. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this section.

# 8.3 Measurement Setup (Block Diagram of Configuration)

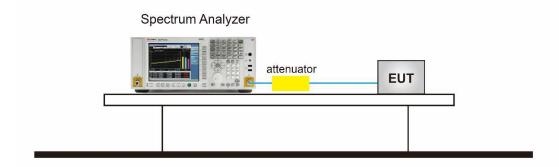

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





#### 8.4 Measurement Results


Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands




Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report.  $Further\ enquiry\ of\ validity\ or\ verification\ of\ the\ test\ report\ should\ be\ addressed\ to\ AGC\ by\ agc 01@agccert.com.$ 

Test\_Graph\_BR\_ANT1\_2402\_1Mbps\_Lower Band Emissions



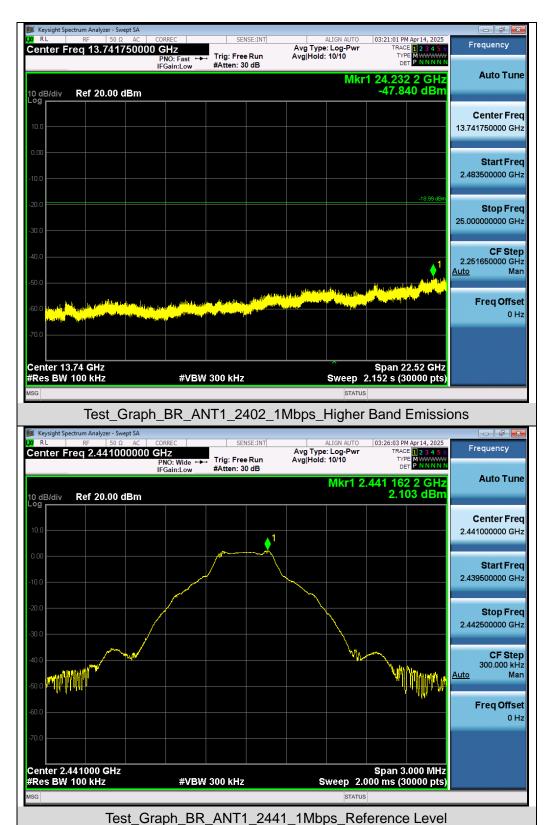



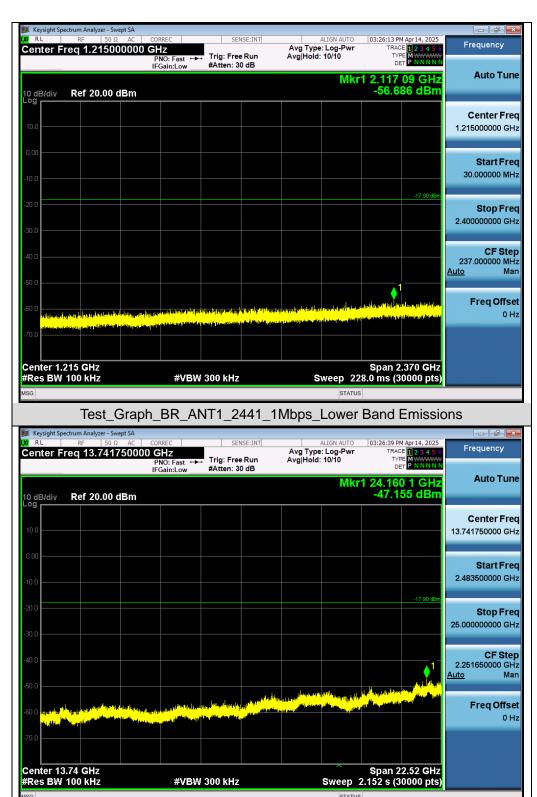


Test\_Graph\_BR\_ANT1\_2441\_1Mbps\_Higher Band Emissions









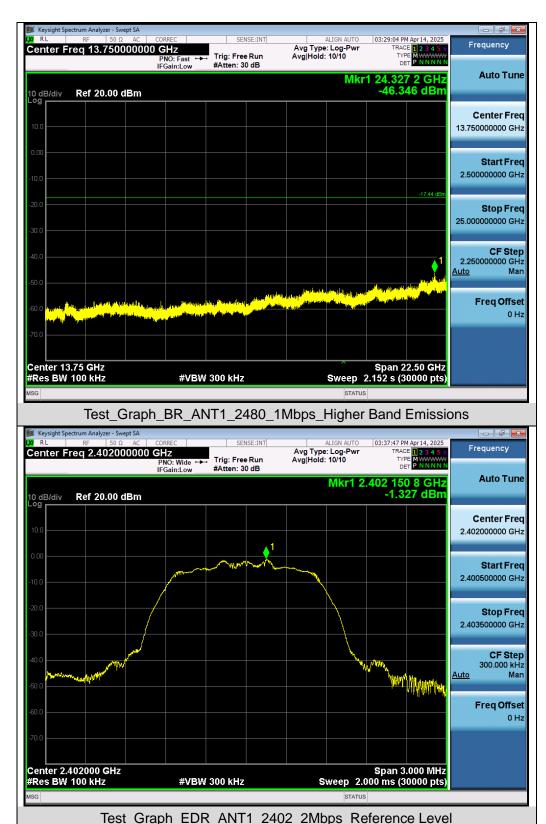




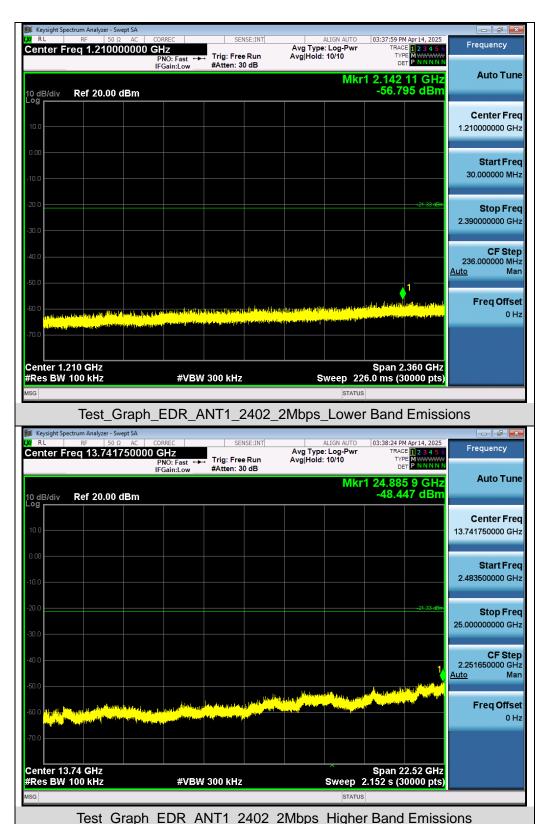




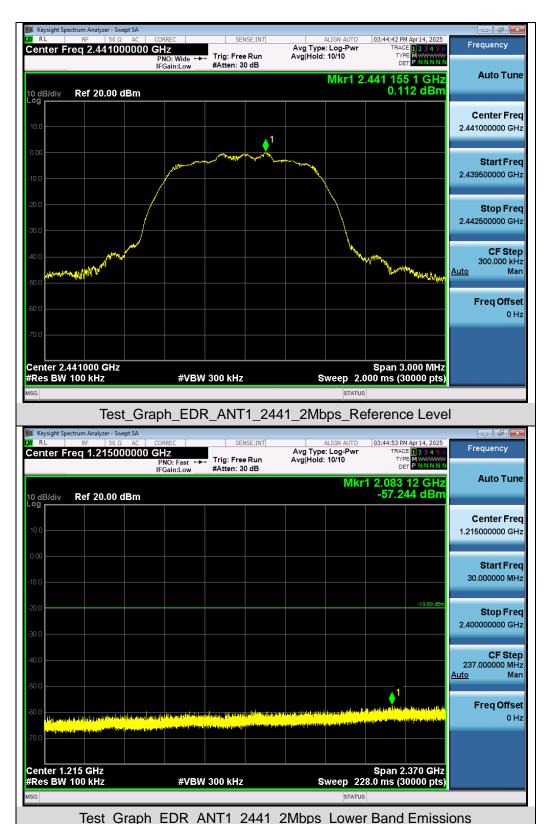



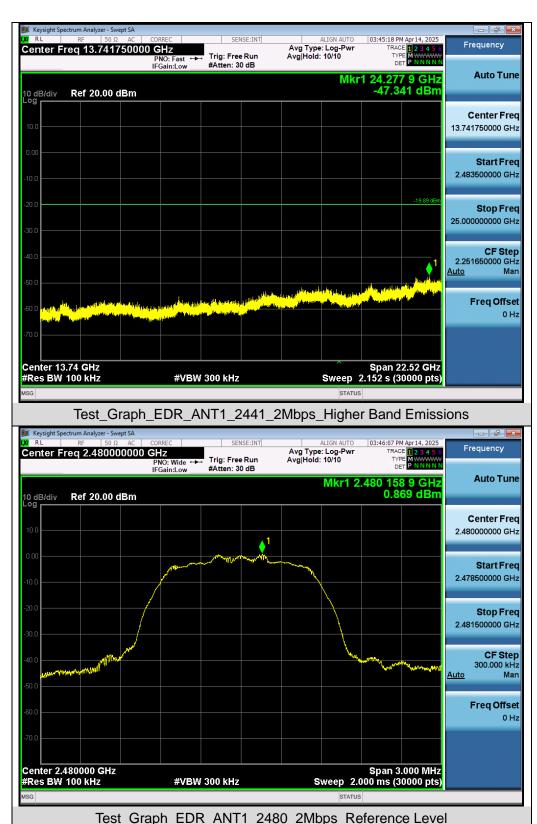




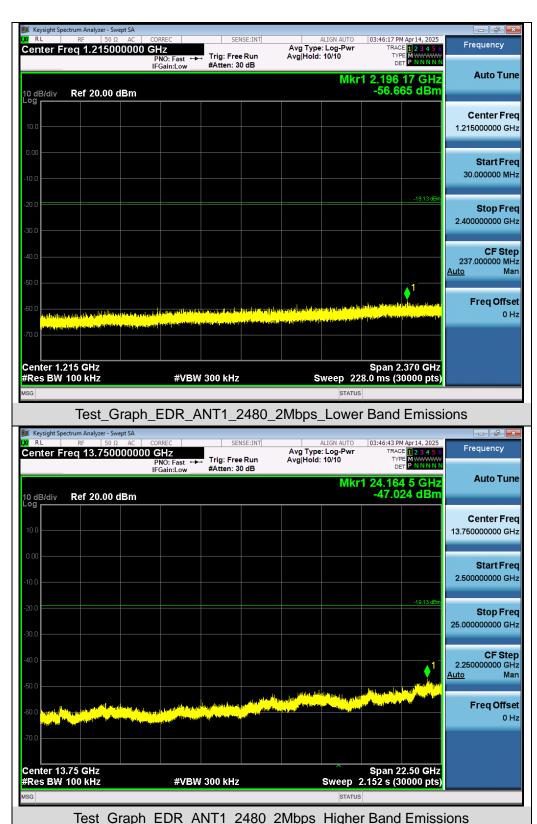









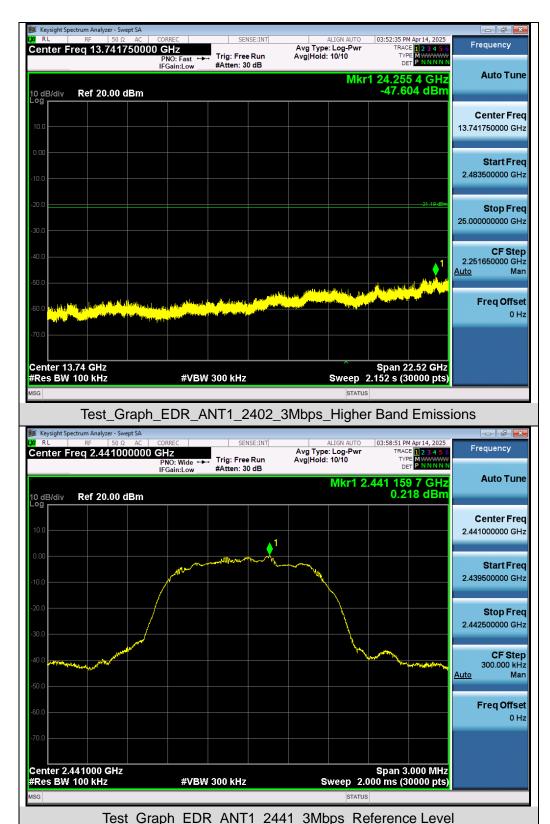




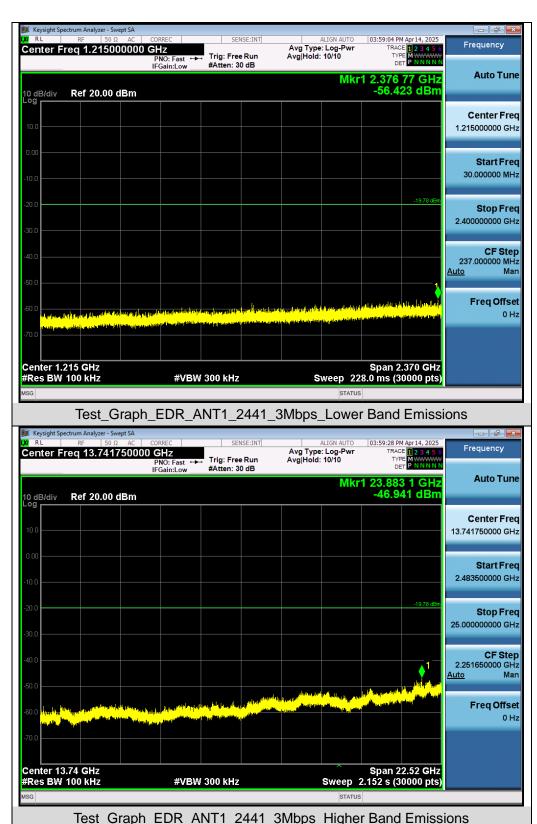




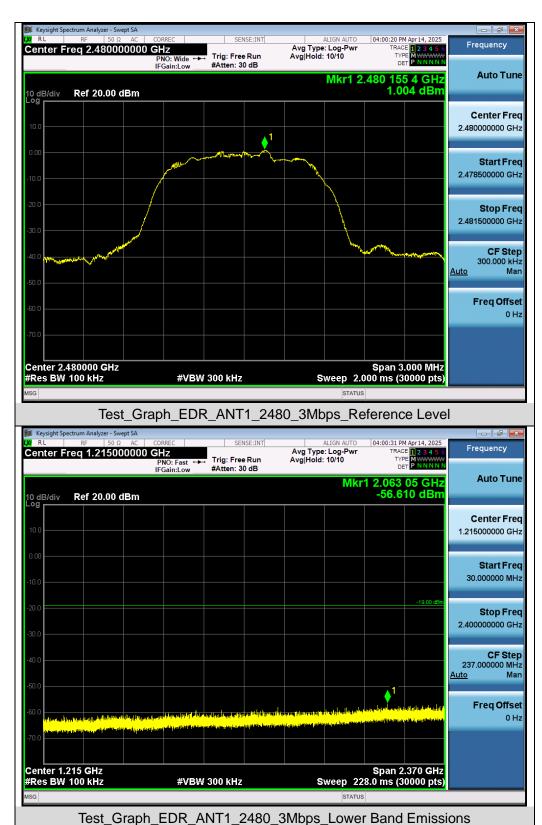



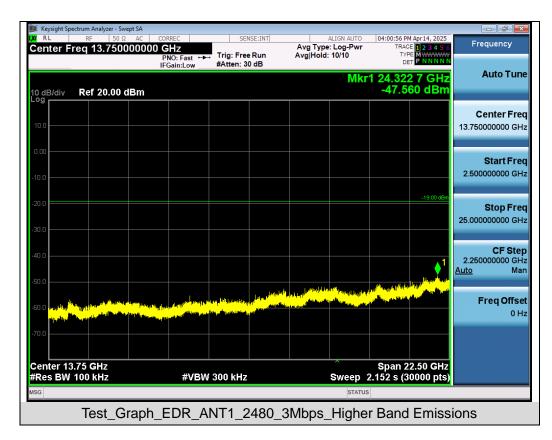






Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands Avg Type: Log-Pwr Avg|Hold: 10/10 Frequency Center Freq 2.398500000 GHz Trig: Free Run #Atten: 30 dB **Auto Tune** Mkr2 2.400 000 0 GHz -51.501 dBm Ref 20.00 dBm Center Freq 2.398500000 GHz Start Freq 2.390000000 GHz Stop Freq 2.407000000 GHz Center 2.398500 GHz #Res BW 100 kHz Span 17.00 MHz Sweep 2.000 ms (30000 pts) #VBW 300 kHz 1.700000 MHz <u>Auto</u> Freq Offset 0 Hz Test\_Graph\_BR\_ANT1\_2402\_1Mbps\_Lower Band Edge Emissions Avg Type: Log-Pwr Avg|Hold: 10/10 Frequency Center Freq 2.487500000 GHz Trig: Free Run #Atten: 30 dB PNO: Fast \* IFGain:Low **Auto Tune** Mkr2 2.483 500 0 GHz -58.191 dBm Ref 20.00 dBm Center Freq 2.487500000 GHz Start Freq Stop Freq 2.500000000 GHz Center 2.48750 GHz #Res BW 100 kHz Span 25.00 MHz Sweep 4.000 ms (30000 pts) #VBW 300 kHz 2.500000 MHz 2.585 dBm -58.191 dBm Freq Offset 0 Hz


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_BR\_ANT1\_2480\_1Mbps\_Higher Band Edge Emissions




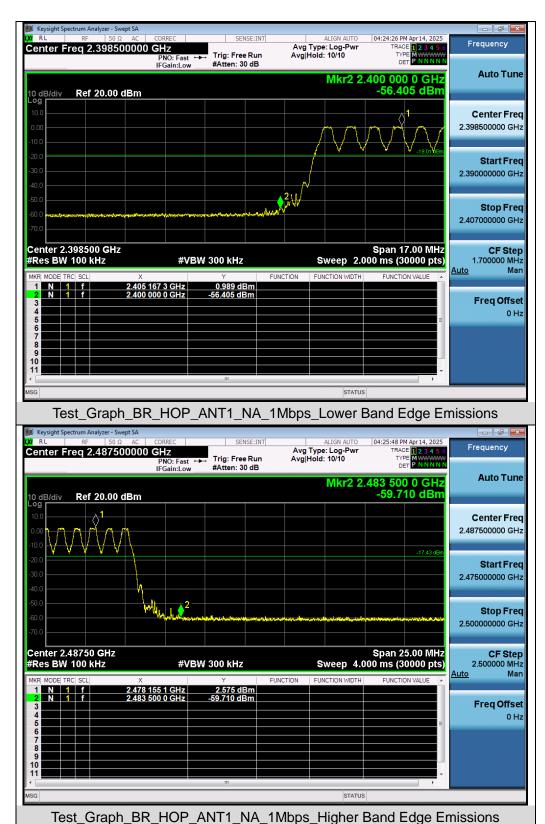




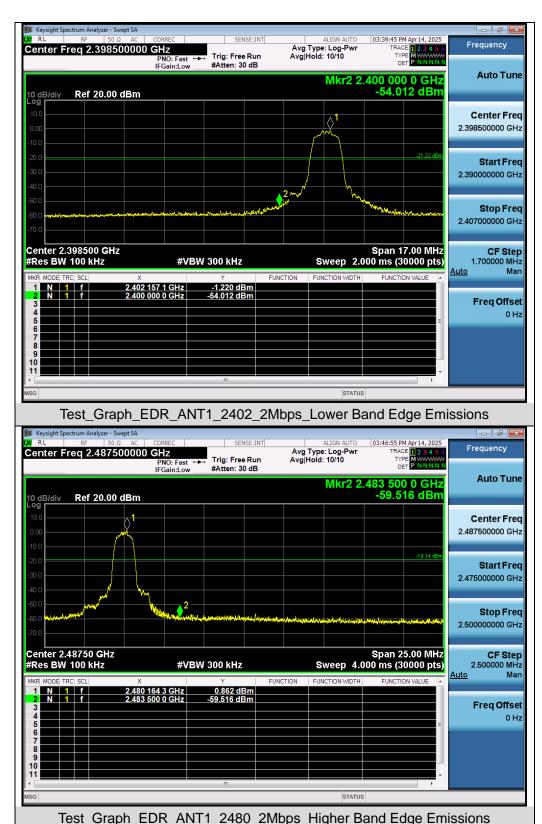




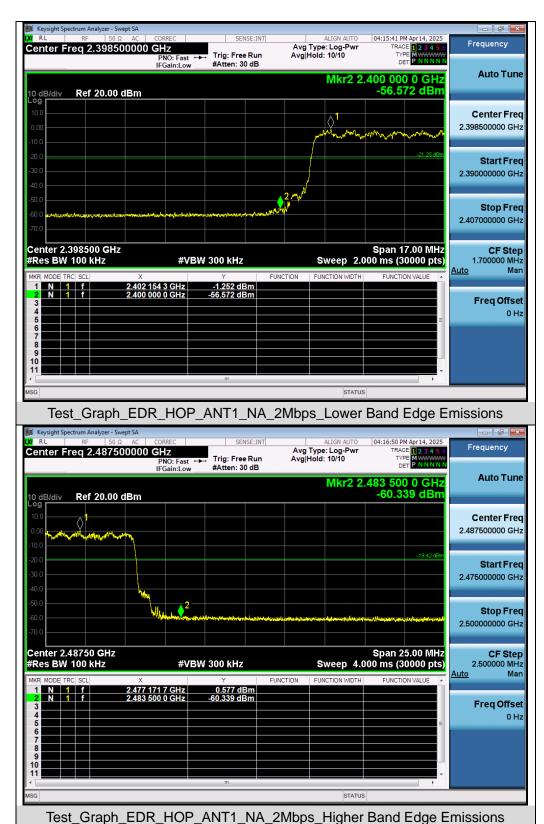



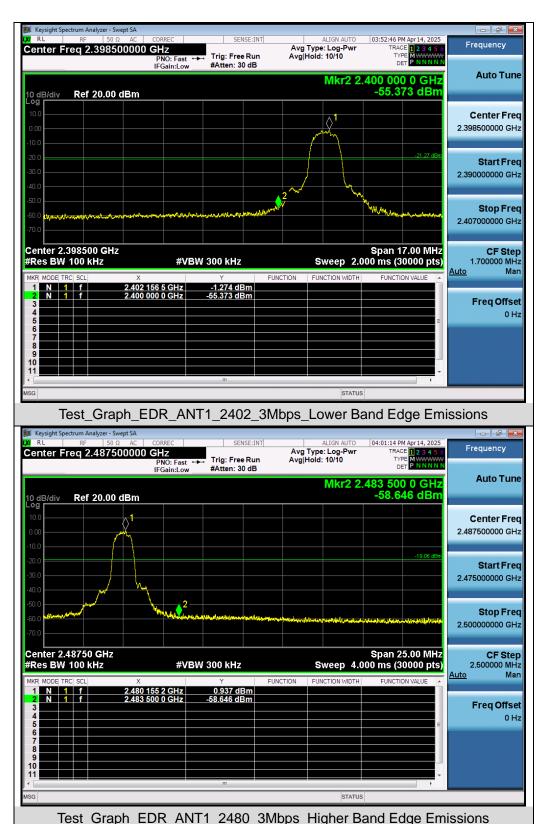



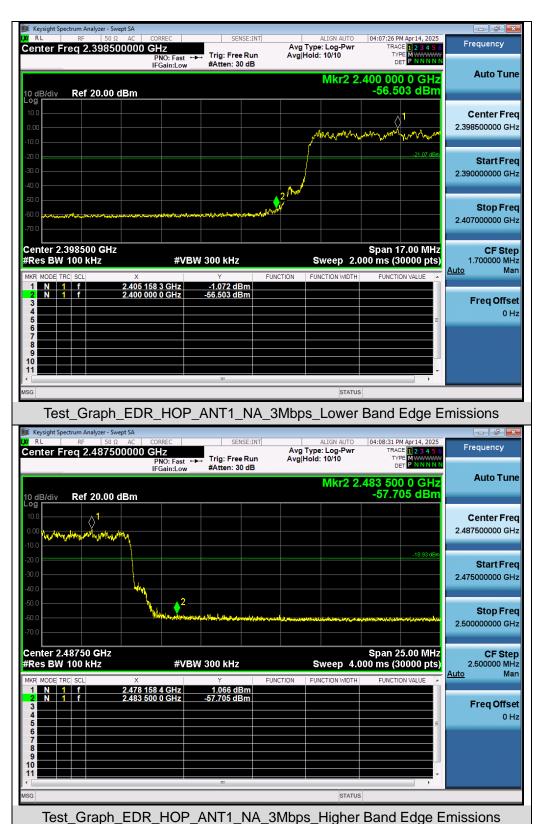



Page 55 of 82

# 9. Radiated Spurious Emission

#### 9.1 Measurement Limit

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

#### 9.2 Measurement Procedure

- The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.



Report No.: AGC13729250401FR01 Page 56 of 82

8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.

- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting		
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP		
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP		
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP		
Start ~Stop Frequency	1GHz~26.5GHz		
Start ~Stop i requertey	1MHz/3MHz for Peak, 1MHz/3MHz for Average		

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP



Page 57 of 82

#### Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

#### • Peak Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize


#### Average Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW ≥ [3 × RBW]
- 4. Detector = Power averaging (rms)
- 5. Averaging type = power (i.e., rms)
- 6. Sweep time = auto
- 7. Perform a trace average of at least 100 traces.
- 8. The applicable correction factor is [10\*log (1 / D)], where D is the duty cycle. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.




# 9.3 Measurement Setup (Block Diagram of Configuration)


Radiated Emission Test Setup 9KHz-30MHz

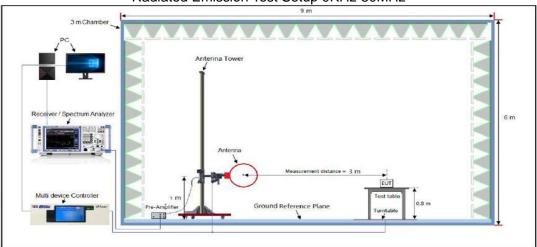


# Radiated Emission Test Setup 30MHz-1000MHz

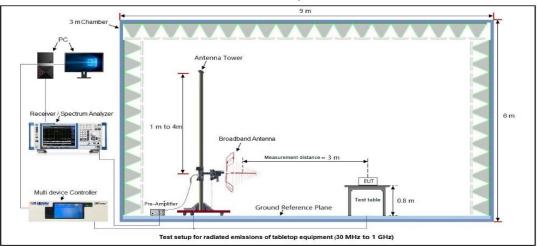

## Radiated Emission Test Setup Above 1000MHz

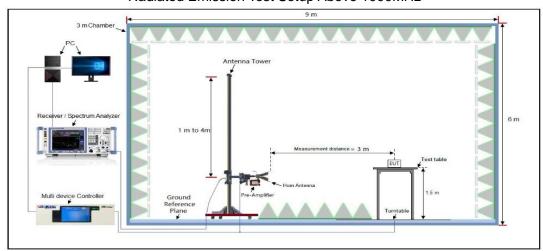






#### 9.4 Measurement Result


#### **Radiated Emission Below 30MHz**

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

Radiated Emission Test Results at 30MHz-1GHz						
EUT Name	True Wireless Stereo Earphone	Model Name	FoKus Amadeus			
Temperature	21.2℃	Relative Humidity	65.6 %			
Pressure	960hPa	Test Voltage	DC 3.6V by battery			
Test Mode	Mode 9	Antenna Polarity	Horizontal			

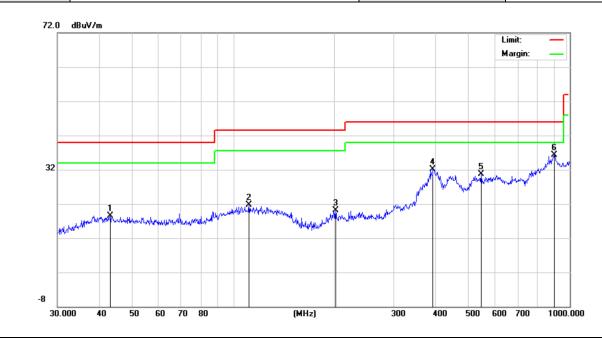


Final I	Final Data List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	43.0505	18.59	13.60	40.00	21.41	100	110	Horizontal
2	111.3468	21.64	16.31	43.50	21.86	100	140	Horizontal
3	201.3930	20.03	14.49	43.50	23.47	100	80	Horizontal
4	392.0951	32.03	19.53	46.00	13.97	100	200	Horizontal
5	545.1826	30.76	23.98	46.00	15.24	100	140	Horizontal
6	900.1474	36.28	31.78	46.00	9.72	100	130	Horizontal





Radiated Emission Test Results at 30MHz-1GHz						
EUT Name True Wireless Stereo Earphone Model Name FoKus Amadeus						
Temperature	21.2℃	Relative Humidity	65.6 %			
Pressure	960hPa	Test Voltage	DC 3.6V by battery			
Test Mode	Mode 9	Antenna Polarity	Vertical			

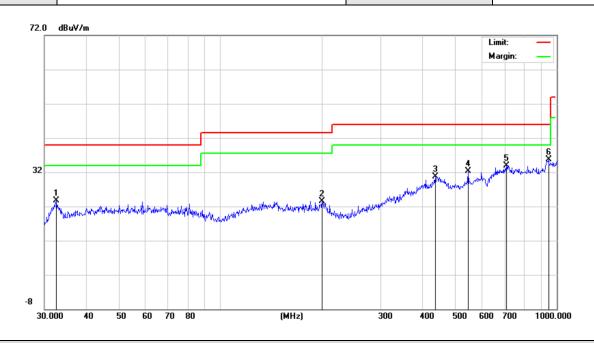

Peak D	Peak Data List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	32.5198	23.74	14.41	40.00	16.26	100	160	Vertical
2	200.6881	23.59	17.85	43.50	19.91	100	80	Vertical
3	435.5898	30.63	25.39	46.00	15.37	100	150	Vertical
4	545.1826	32.30	24.67	46.00	13.7	100	220	Vertical
5	709.1823	33.90	28.42	46.00	12.1	100	190	Vertical
6	945.4399	35.75	30.78	46.00	10.25	100	110	Vertical

# **RESULT: Pass**

#### Note:

- 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.
- 2. All test modes had been pre-tested. The mode 9 is the worst case and recorded in the report.



Page 61 of 82

## **Radiated Emissions Test Results Above 1GHz**

EUT Name	True Wireless Stereo Earphone	Model Name	FoKus Amadeus
Temperature	21.2℃	Relative Humidity	65.6 %
Pressure	960hPa	Test Voltage	DC 3.6V by battery
Test Mode	Mode 7	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	46.77	0.08	46.85	74	-27.15	peak
4804.000	37.67	80.0	37.75	54	-16.25	AVG
7206.000	41.64	2.21	43.85	74	-30.15	peak
7206.000	32.19	2.21	34.40	54	-19.60	AVG

## Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT Name	True Wireless Stereo Earphone	Model Name	FoKus Amadeus
Temperature	21.2℃	Relative Humidity	65.6 %
Pressure	960hPa	Test Voltage	DC 3.6V by battery
Test Mode	Mode 7	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	46.38	0.08	46.46	74	-27.54	peak
4804.000	37.32	0.08	37.40	54	-16.60	AVG
7206.000	41.78	2.21	43.99	74	-30.01	peak
7206.000	32.72	2.21	34.93	54	-19.07	AVG

## Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

## **RESULT: PASS**



Page 62 of 82

## **Radiated Emissions Test Results for Above 1GHz**

EUT Name	True Wireless Stereo Earphone	Model Name	FoKus Amadeus
Temperature	21.2℃	Relative Humidity	65.6 %
Pressure	960hPa	Test Voltage	DC 3.6V by battery
Test Mode	Mode 8	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4882.000	46.86	80.0	46.94	74	-27.06	peak
4882.000	37.34	80.0	37.42	54	-16.58	AVG
7323.000	41.90	2.21	44.11	74	-29.89	peak
7323.000	32.72	2.21	34.93	54	-19.07	AVG

## Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT Name	True Wireless Stereo Earphone	Model Name	FoKus Amadeus
Temperature	21.2℃	Relative Humidity	65.6 %
Pressure	960hPa	Test Voltage	DC 3.6V by battery
Test Mode	Mode 8	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4882.000	46.59	0.08	46.67	74	-27.33	peak
4882.000	37.91	0.08	37.99	54	-16.01	AVG
7323.000	41.13	2.21	43.34	74	-30.66	peak
7323.000	32.56	2.21	34.77	54	-19.23	AVG
		•				

## Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

## **RESULT: PASS**



Page 63 of 82

## **Radiated Emissions Test Results for Above 1GHz**

EUT Name	True Wireless Stereo Earphone	Model Name	FoKus Amadeus
Temperature	21.2℃	Relative Humidity	65.6 %
Pressure	960hPa	Test Voltage	DC 3.6V by battery
Test Mode	Mode 9	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	46.17	0.08	46.25	74	-27.75	peak
4960.000	37.72	0.08	37.80	54	-16.20	AVG
7440.000	41.98	2.21	44.19	74	-29.81	peak
7440.000	32.24	2.21	34.45	54	-19.55	AVG

## Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	True Wireless Stereo Earphone	Model Name	FoKus Amadeus
Temperature	21.2℃	Relative Humidity	65.6 %
Pressure	960hPa	Test Voltage	DC 3.6V by battery
Test Mode	Mode 9	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	46.36	0.08	46.44	74	-27.56	peak
4960.000	37.47	0.08	37.55	54	-16.45	AVG
7440.000	41.46	2.21	43.67	74	-30.33	peak
7440.000	32.82	2.21	35.03	54	-18.97	AVG


#### Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

# **RESULT: PASS**

# Note:

- 1. The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.







EUT Name	True Wireless Stereo Earphone	Model Name	FoKus Amadeus
Temperature	25.1℃	Relative Humidity	41%
Pressure	960hPa	Test Voltage	DC 3.6V by battery
Test Mode	Mode 7	Antenna Polarity	Horizontal


Test Graph for Peak Measurement





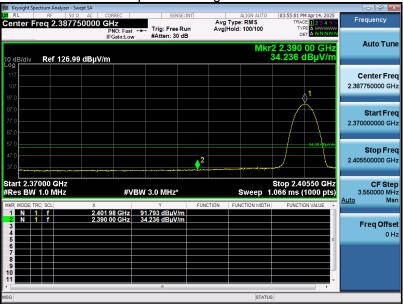

#### **RESULT: PASS**







EUT Name	True Wireless Stereo Earphone	Model Name	FoKus Amadeus
Temperature	25.1℃	Relative Humidity	41%
Pressure	960hPa	Test Voltage	DC 3.6V by battery
Test Mode	Mode 7	Antenna Polarity	Vertical


Test Graph for Peak Measurement





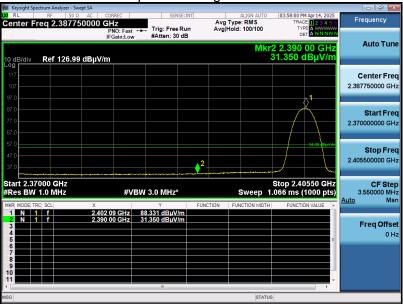


#### **RESULT: PASS**







EUT Name	True Wireless Stereo Earphone	Model Name	FoKus Amadeus
Temperature	25.1℃	Relative Humidity	41%
Pressure	960hPa	Test Voltage	DC 3.6V by battery
Test Mode	Mode 9	Antenna Polarity	Horizontal


Test Graph for Peak Measurement

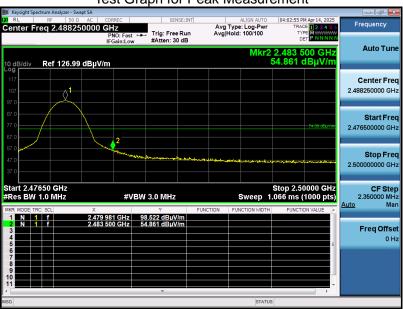



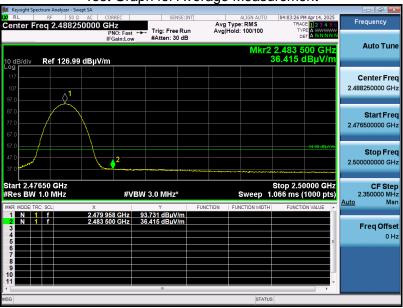


#### **RESULT: PASS**






EUT Name	True Wireless Stereo Earphone	Model Name	FoKus Amadeus
Temperature	25.1℃	Relative Humidity	41%
Pressure	960hPa	Test Voltage	DC 3.6V by battery
Test Mode	Mode 9	Antenna Polarity	Vertical

Test Graph for Peak Measurement

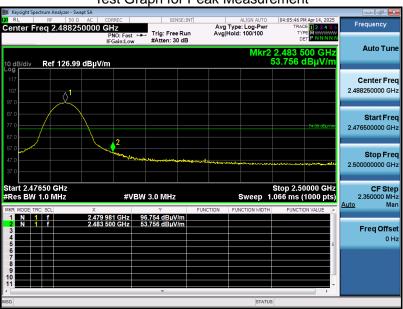





# **RESULT: PASS**

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



Report No.: AGC13729250401FR01 Page 68 of 82

# 10. Number of Hopping Frequency Measurement

## 10.1 Provisions Applicable


This frequency hopping system must employ a minimum of 15 hopping channels.

#### 10.2 Measurement Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- 1. Span = The frequency band of operation. Depending on the number of channels the device
- 2. supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- 4. VBW ≥ RBW
- 5. Sweep time = Auto couple
- 6. Detector = Peak
- 7. Trace mode = Max hold
- 8. Allow the trace to stabilize

# 10.3 Measurement Setup (Block Diagram of Configuration)

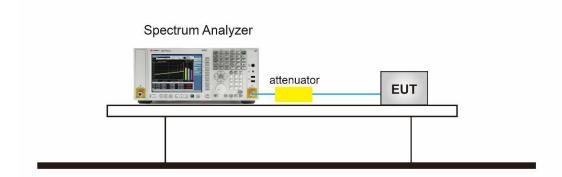

#### 10.4 Measurement Result

Test Data of Number of Hopping Frequency					
Test Mode	Number of Hopping Frequency	Limits	Pass or Fail		
GFSK Hopping	79	>=15	Pass		
π /4-DQPSK Hopping	79	>=15	Pass		
8DPSK Hopping	79	>=15	Pass		