

Formal Radio Test Report

FCC ID: LDK-ETHIK2360

C9124AXE-B

Cisco Catalyst C9124AX Series 802.11ax Access Point
5 GHz Primary Radio

5250 – 5350 MHz

Against the following Specifications:

CFR47 Part 15.407



Cisco Systems
170 West Tasman Drive
San Jose, CA 95134

	
Author: Johanna Knudsen, Nathan Sousa Tested By: Johanna Knudsen, Julian Land, & Mathew Blackburn	Approved By: Sam Kim Title: Manager, Radio Compliance Revision: 1

This report replaces any previously entered test report under EDCS – 22656200. This test report has been electronically authorized and archived using the CISCO Engineering Document Control system. Test Report Template EDCS# 11644123.

SECTION 1: OVERVIEW	3
SECTION 2: ASSESSMENT INFORMATION	4
2.1: GENERAL	4
2.2: DATE OF TESTING	5
2.3: REPORT ISSUE DATE	5
2.4: TESTING FACILITIES	5
2.5: EQUIPMENT ASSESSED (EUT)	6
2.6: EUT DESCRIPTION	6
SECTION 3: RESULT SUMMARY	8
3.1: RESULTS SUMMARY TABLE	8
SECTION 4: SAMPLE DETAILS	10
4.1: SAMPLE DETAILS	10
4.2: SYSTEM DETAILS	10
4.3: MODE OF OPERATION DETAILS	11
APPENDIX A: EMISSION TEST RESULTS	12
A.1: DUTY CYCLE	13
A.2: 99% AND 26dB BANDWIDTH	16
A.3: MAXIMUM CONDUCTED OUTPUT POWER	20
A.4: POWER SPECTRAL DENSITY	34
A.5: CONDUCTED SPURIOUS EMISSIONS	50
A.6: CONDUCTED BANDEDGE	82
APPENDIX B: EMISSION TEST RESULTS	96
B.1: RADIATED SPURIOUS EMISSIONS	97
B.2: RADIATED EMISSIONS 30MHz TO 1GHz	98
B.3: AC CONDUCTED EMISSIONS	99
APPENDIX C: LIST OF TEST EQUIPMENT USED TO PERFORM THE TEST	100
APPENDIX D: ABBREVIATION KEY AND DEFINITIONS	105
APPENDIX E: PHOTOGRAPHS OF TEST SETUPS	106
APPENDIX F: SOFTWARE USED TO PERFORM TESTING	106
APPENDIX G: TEST PROCEDURES	106
APPENDIX H: SCOPE OF ACCREDITATION (A2LA CERTIFICATE NUMBER 1178-01)	106
APPENDIX I: TEST ASSESSMENT PLAN	106
APPENDIX J: WORST CASE JUSTIFICATION	106

Section 1: Overview

The samples were assessed against the tests detailed in section 3 under the requirements of the following specifications:

Specifications:
CFR47 Part 15.407

Section 2: Assessment Information

2.1: General

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc:

With regard to this assessment, the following points should be noted:

- a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.
- b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.
- c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).
- d) All testing was performed under the following environmental conditions:

Temperature	15 °C to 35 °C (54 °F to 95 °F)
Atmospheric Pressure	860 mbar to 1060 mbar (25.4" to 31.3")
Humidity	10% to 75*%

- e) All AC testing was performed at one or more of the following supply voltages:

110V 60 Hz (+/-20%)

Units of Measurement

The units of measurements defined in the appendices are reported in specific terms, which are test dependent. Where radiated measurements are concerned these are defined at a particular distance. Basic voltage measurements are defined in units of [dBuV]

As an example, the basic calculation for all measurements is as follows:

$$\text{Emission level [dBuV]} = \text{Indicated voltage level [dBuV]} + \text{Cable Loss [dB]} + \text{Other correction factors [dB]}$$

The combinations of correction factors are dependent upon the exact test configurations [see test equipment lists for further details] and may include:

Antenna Factors, Pre-Amplifier Gain, LISN Loss, Pulse Limiter Loss and Filter Insertion Loss

Note: To convert the results from dBuV/m to uV/m use the following formula:

$$\text{Level in uV/m} = \text{Common Antilogarithm} [(X \text{ dBuV/m})/20] = Y \text{ uV/m}$$

Measurement Uncertainty Values

voltage and power measurements	± 2 dB
conducted EIRP measurements	± 1.4 dB
radiated measurements	± 3.2 dB
frequency measurements	± 2.4 10 ⁻⁷
temperature measurements	± 0.54°
humidity measurements	± 2.3%
DC and low frequency measurements	± 2.5%

Where relevant measurement uncertainty levels have been estimated for tests performed on the apparatus. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Radiated emissions (expanded uncertainty, confidence interval 95%)

30 MHz – 300 MHz	± 3.8 dB
300 MHz – 1000 MHz	± 4.3 dB
1 GHz – 10 GHz	± 4.0 dB
10 GHz – 18GHz	± 8.2 dB
18GHz – 26.5GHz	± 4.1 dB
26.5GHz – 40GHz	± 3.9 dB

Conducted emissions (expanded uncertainty, confidence interval 95%)

30 MHz – 40 GHz	± 0.38 dB
-----------------	---------------

A product is considered to comply with a requirement if the nominal measured value is below the limit line. The product is considered to not be in compliance in case the nominal measured value is above the limit line.

This report must not be reproduced except in full, without written approval of Cisco Systems.

2.2: Date of testing

26-JUL-2021 to 28-AUG-2021; 01-SEP-2021 to 04-SEP-2021; 11-SEP-2021 to 14-SEP-2021

2.3: Report Issue Date

6-DEC-21

Cisco uses an electronic system to issue, store and control the revision of test reports. This system is called the Engineering Document Control System (EDCS). The actual report issue date is embedded into the original file on EDCS. Any copies of this report, either electronic or paper, that are not on EDCS must be considered uncontrolled.

2.4: Testing facilities

This assessment was performed by:

Testing Laboratory
Cisco Systems, Inc.
125 West Tasman Drive (Building P)
San Jose, CA 95134
USA

Headquarters
Cisco Systems, Inc.,
170 West Tasman Drive
San Jose, CA 95134,
USA

Registration Numbers for Industry Canada

Cisco System Site	Address	Site Identifier
Building P, 10m Chamber	125 West Tasman Dr San Jose, CA 95134	Company #: 2461N-2
Building P, 5m Chamber	125 West Tasman Dr San Jose, CA 95134	Company #: 2461N-1
Building 7, 5m Chamber	425 E. Tasman Drive San Jose, California 95134 United States	Company #: 2461N-3

Test Engineer(s):

Johanna Knudsen, Julian Land, Mathew Blackburn

2.5: Equipment Assessed (EUT)

C9124AXE

2.6: EUT Description

The Cisco Catalyst 9124AX Series outdoor access points are next-generation Wi-Fi 6 access points encased in a rugged and robust design that service providers and enterprises can easily deploy.

The radio supports the following modes of operation. The modes are further defined in the radio Theory of Operation. The modes included in this report represent the worst-case data for all modes.

802.11a non-HT20 (6 – 54 Mbps)
 802.11a non-HT20 Beam Forming (6 – 54 Mbps)
 802.11n/ac HT/VHT20 (MCS0 – MCS31)
 802.11n/ac HT/VHT20 Beam Forming (MCS0 – MCS31)
 802.11n/ac HT/VHT20 STBC (MCS0 – MCS7)
 802.11ax HE20 (MCS0 – MCS9) 1 SS
 802.11ax HE20 (MCS0 – MCS9) 2 SS
 802.11ax HE20 (MCS0 – MCS9) 3 SS
 802.11ax HE20 (MCS0 – MCS9) 4 SS
 802.11ax HE20 Beam Forming (MCS0 – MCS9) 1 SS
 802.11ax HE20 Beam Forming (MCS0 – MCS9) 2 SS
 802.11ax HE20 Beam Forming (MCS0 – MCS9) 3 SS
 802.11ax HE20 Beam Forming (MCS0 – MCS9) 4 SS
 802.11ax HE20 STBC (MCS0 – MCS9) 2 SS

802.11a non-HT40 (6 – 54 Mbps)
 802.11n/ac HT/VHT40 (MCS0 – MCS31)
 802.11n/ac HT/VHT40 Beam Forming (MCS0 – MCS31)
 802.11n/ac HT/VHT40 STBC (MCS0 – MCS7)
 802.11ax HE40 (MCS0 – MCS9) 1 SS
 802.11ax HE40 (MCS0 – MCS9) 2 SS
 802.11ax HE40 (MCS0 – MCS9) 3 SS
 802.11ax HE40 (MCS0 – MCS9) 4 SS
 802.11ax HE40 Beam Forming (MCS0 – MCS9) 1 SS
 802.11ax HE40 Beam Forming (MCS0 – MCS9) 2 SS
 802.11ax HE40 Beam Forming (MCS0 – MCS9) 3 SS
 802.11ax HE40 Beam Forming (MCS0 – MCS9) 4 SS
 802.11ax HE40 STBC (MCS0 – MCS9) 2 SS

802.11a non-HT80 (6 – 54 Mbps)
 802.11n/ac HT/VHT80 (MCS0 – MCS9) 1 SS
 802.11n/ac HT/VHT80 (MCS0 – MCS9) 2 SS
 802.11n/ac HT/VHT80 (MCS0 – MCS9) 3 SS
 802.11n/ac HT/VHT80 (MCS0 – MCS9) 4 SS
 802.11n/ac HT/VHT80 Beam Forming (MCS0 – MCS9) 1 SS

802.11n/ac HT/VHT80 Beam Forming (MCS0 – MCS9) 2 SS
802.11n/ac HT/VHT80 Beam Forming (MCS0 – MCS9) 3 SS
802.11n/ac HT/VHT80 Beam Forming (MCS0 – MCS9) 4 SS
802.11n/ac HT/VHT80 STBC (MCS0 – MCS9) 1 SS
802.11ax HE80 (MCS0 – MCS9) 1 SS
802.11ax HE80 (MCS0 – MCS9) 2 SS
802.11ax HE80 (MCS0 – MCS9) 3 SS
802.11ax HE80 (MCS0 – MCS9) 4 SS
802.11ax HE80 Beam Forming (MCS0 – MCS9) 1 SS
802.11ax HE80 Beam Forming (MCS0 – MCS9) 2 SS
802.11ax HE80 Beam Forming (MCS0 – MCS9) 3 SS
802.11ax HE80 Beam Forming (MCS0 – MCS9) 4 SS
802.11ax HE80 STBC (MCS0 – MCS9) 1 SS

The following antennas are supported by this product series. Please note, the antenna information has been provided by the customer (the Cisco business unit). The data included in this report represent the worst-case data for all antennas.

Frequency	Antenna Name		Antenna Gain
5 GHz	TX/RX: External	Antenna 1	13 dBi (Side Lobe: 2 dBi)

Section 3: Result Summary

3.1: Results Summary Table

Conducted emissions

Basic Standard	Technical Requirements / Details	Result
FCC 15.407	99% & 26 dB Bandwidth: The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. There is no limit for 99% OBW. The 26 dB emission is the width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.	Pass
FCC 15.407	Output Power: For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	Pass
FCC 15.407	Power Spectral Density The maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	Pass
FCC 15.407	Conducted Spurious Emissions / Band-Edge: 2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.	Pass
FCC 15.407 FCC 15.205 FCC 15.209	Restricted band: Unwanted emissions must comply with the general field strength limits set forth in §15.209.	Pass

Radiated Emissions (General requirements)

Basic Standard	Technical Requirements / Details	Result
FCC 15.407 FCC 15.205 FCC 15.209	TX Spurious Emissions: Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the field strength limits table in this section.	Not covered by the scope of this test report
FCC 15.207	AC conducted Emissions: U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.	Not covered by the scope of this test report

Section 4: Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing.

4.1: Sample Details

Sample No.	Equipment Details	Manufacturer	Hardware Rev.	Serial Number
S01	C9124AXE-B (Used in Rack 2)	Foxconn (For Cisco)	PP	FOC25028JEV
S02	C9124AXE-B (Used in Rack 3)	Foxconn (For Cisco)	PP	FOC25042JPW
S03	C9124AXE-B (Used in Rack 8)	Foxconn (For Cisco)	PP	FOC252811S1
S04	C9124AXE-B (Used in Rack 8)	Foxconn (For Cisco)	PP	FOC25292AQ4
S05	C9124AXE-B (Used in Rack 9)	Foxconn (For Cisco)	PP	FOC25220CP1
S06	C9124AXE-B (Used in Rack 9)	Foxconn (For Cisco)	PP	FOC25292APS
S07	C9124AXE-B (Used in Rack 9)	Foxconn (For Cisco)	PP	FOC25028JFG
S08	C9124AXE-B (Used in Rack 4)	Foxconn (For Cisco)	PP	FOC25028JBJ

4.2: System Details


System #	Description	Samples
1	EUT (used in Rack 2)	S01
2	EUT (used in Rack 3)	S02
3	EUT (used in Rack 8)	S03
3	EUT (used in Rack 8)	S04
4	EUT (used in Rack 9)	S05
4	EUT (used in Rack 9)	S06
4	EUT (used in Rack 9)	S07
5	EUT (used in Rack 4)	S08

4.3: Mode of Operation Details

Mode#	Description	Comments
1	Continuously Transmitting Testing using Rack 2	AP Running Image: 8.8.1.10 Cisco AP Software, (ap1g6a), [cheetah-build9:/san1/BUILD/workspace/c176_throttle_mfg/label/mfg-ap1g6a] Compiled Wed Jul 7 22:15:45 GMT 2021
2	Continuously Transmitting Testing using Rack 3	AP Running Image: 8.8.1.10 Cisco AP Software, (ap1g6a), [cheetah-build9:/san1/BUILD/workspace/c176_throttle_mfg/label/mfg-ap1g6a] Compiled Wed Jul 7 22:15:45 GMT 2021
3	Continuously Transmitting Testing using Rack 8 23-JUL-2021 to 23-AUG-2021	AP Running Image: 8.8.1.10 Cisco AP Software, (ap1g6a), [cheetah-build9:/san1/BUILD/workspace/c176_throttle_mfg/label/mfg-ap1g6a] Compiled Wed Jul 14 22:18:33 GMT 2021
3	Continuously Transmitting Testing using Rack 8 24-AUG-2021	AP Running Image: 8.8.1.10 Cisco AP Software, (ap1g6a), [sjc-ads-5182:/nobackup/maruthib/c176lthaca] Compiled Wed Jul 28 23:16:09 PDT 2021
4	Continuously Transmitting Testing using Rack 9 26-JUL-2021 to 25-AUG-2021	AP Running Image: 8.8.1.10 Cisco AP Software, (ap1g6a), [cheetah-build9:/san1/BUILD/workspace/c176_throttle_mfg/label/mfg-ap1g6a] Compiled Wed Jul 14 22:18:33 GMT 2021
5	Continuously Transmitting Testing using Rack 9 26-AUG-2021	AP Running Image: 8.8.1.10 Cisco AP Software, (ap1g6a), [sjc-ads-5182:/nobackup/maruthib/c176lthaca] Compiled Wed Jul 28 23:16:09 PDT 2021
6	Continuously Transmitting Testing using Rack 9 23-JUL-2021 to 25-JUL-2021	AP Running Image: 8.8.1.10 Cisco AP Software, (ap1g6a), [cheetah-build9:/san1/BUILD/workspace/c175_throttle_mfg/label/mfg-ap1g6a] Compiled Wed Apr 14 18:59:06 GMT 2021
7	Continuously Transmitting Testing using Rack 4	AP Running Image: 8.8.1.10 Cisco AP Software, (ap1g6a), [cheetah-build9:/san1/BUILD/workspace/c175_throttle_mfg/label/mfg-ap1g6a] Compiled Wed Apr 14 18:59:06 GMT 2021

Appendix A: Emission Test Results

Conducted Test Setup Diagram

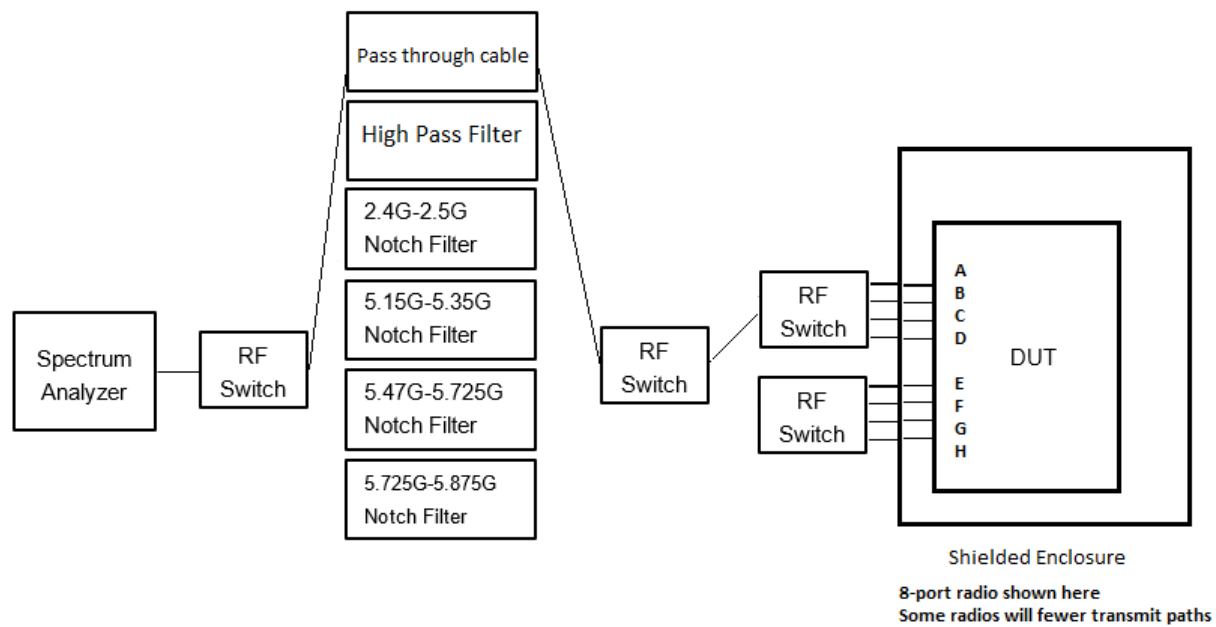

A.1: Duty Cycle

Duty Cycle Test Requirement

From KDB 789033 D02 General UNII Test Procedures New Rules v02r01

B. Duty Cycle (x), Transmission Duration (T), and Maximum Power Control Level

1. All measurements are to be performed with the EUT transmitting at 100 percent duty cycle at its maximum power control level; however, if 100 percent duty cycle cannot be achieved, measurements of duty cycle, x, and maximum-power transmission duration, T, are required for each tested mode of operation.

Duty Cycle Test Method

From KDB 789033 D02 General UNII Test Procedures New Rules v02r01:

B. Duty Cycle (x), Transmission Duration (T), and Maximum Power Control Level

The zero-span mode on a spectrum analyzer or EMI receiver, if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set RBW $\geq$ EBW if possible; otherwise, set RBW to the largest available value. Set VBW $\geq$ RBW. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$, where T is defined in section II.B.1.a), and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

Duty Cycle Test Information

Tested By: Johanna Knudsen, Julian Land, Mathew Blackburn	Date of testing: 26-JUL-2021 to 29-JUL-2021; 11-SEP-2021 to 12-SEP-2021
Test Result: PASS	

Test Equipment

See Appendix C for list of test equipment


Duty Cycle Data Table

Duty Cycle table and screen captures are shown below for Power/PSD modes.

Frequency (MHz)	Mode	Data Rate (Mbps)	Duty Cycle (dB)
5260	Non HT20, 6 to 54 Mbps	6.0	0.23009
	HT/VHT20, M0 to M7	m0	0.21865
	HE20, M0 to M9 1ss	m0h1	0.21774
5270	Non HT40, 6 to 54 Mbps	6.0	0.33811
	HT/VHT40, M0 to M7	m0	0.32031
	HE40, M0 to M9 1ss	m0h1	0.29003
5280	Non HT20, 6 to 54 Mbps	6.0	0.23009
	HT/VHT20, M0 to M7	m0	0.21865
	HE20, M0 to M9 1ss	m0h1	0.21774
5290	Non HT80, 6 to 54 Mbps	6.0	0.28168
	VHT80, M0 to M9 1ss	m0x1	0.34563
	HE80, M0 to M9 1ss	m0h1	0.23054
5300	Non HT20, 6 to 54 Mbps	6.0	0.23009
	HT/VHT20, M0 to M7	m0	0.21865
	HE20, M0 to M9 1ss	m0h1	0.21774
5310	Non HT40, 6 to 54 Mbps	6.0	0.33811
	HT/VHT40, M0 to M7	m0	0.32031
	HE40, M0 to M9 1ss	m0h1	0.29003
5320	Non HT20, 6 to 54 Mbps	6.0	0.23009
	HT/VHT20, M0 to M7	m0	0.21865
	HE20, M0 to M9 1ss	m0h1	0.21774


Data Screenshots

5290 MHz: VHT80, M0 to M9 1ss

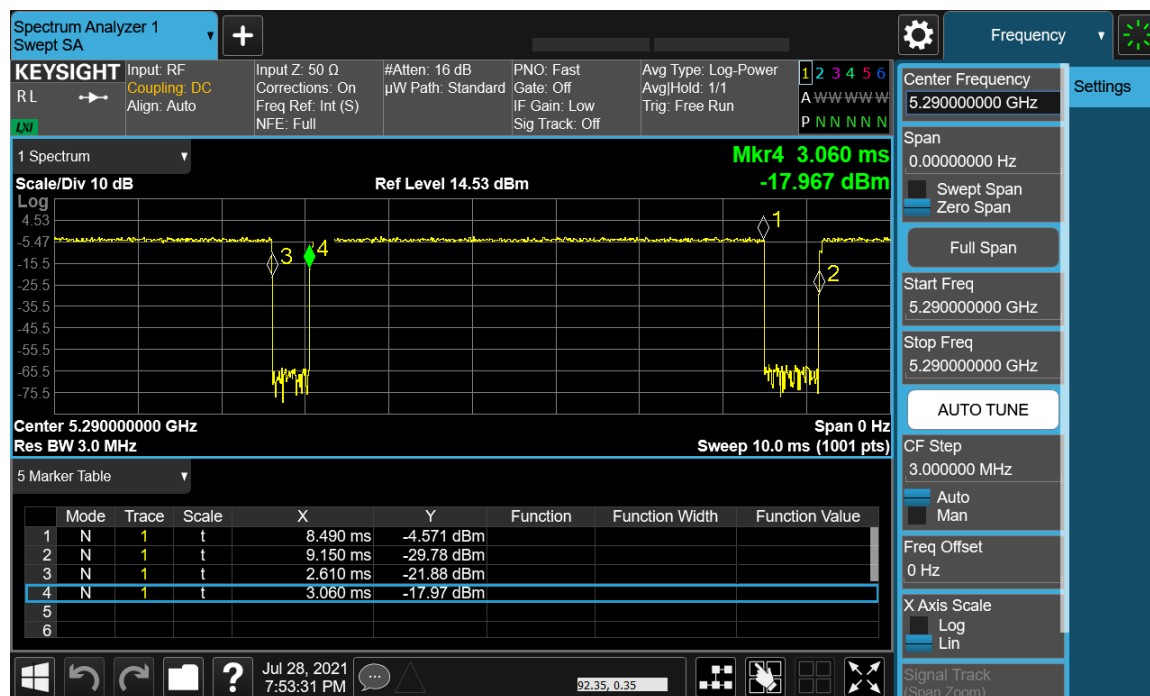

Antenna A

5270 MHz: Non HT40, 6 to 54 Mbps

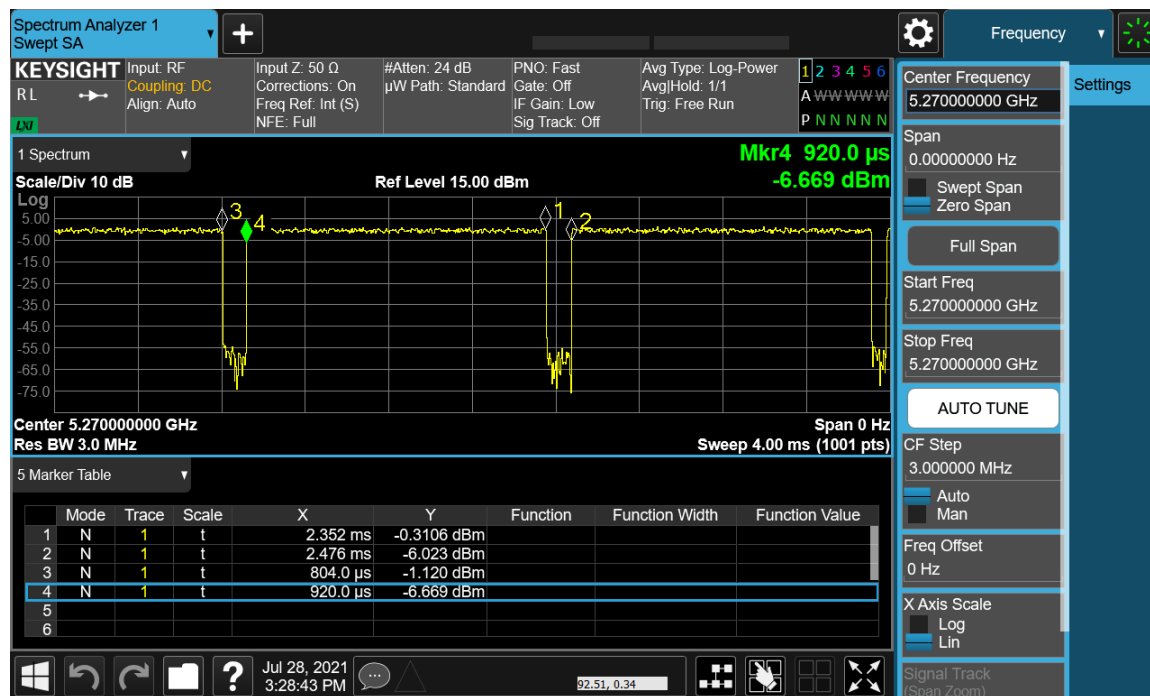

Antenna A

A.2: 99% and 26dB Bandwidth

99% and 26dB Bandwidth Test Requirement

There is no requirement for the value of bandwidth.

However, the 26dB BW (EBW) is used to calculate the power limits in 15.407 (a) (2). Power measurements are made using the 99% Bandwidth as the integration bandwidth.

99% and 26dB Bandwidth Test Procedure

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

ANSI C63.10: 2013

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Section D. 99 Percent Occupied Bandwidth

99% BW Test Parameters
1. Set center frequency to the nominal EUT channel center frequency. 2. Set span = 1.5 times to 5.0 times the OBW. 3. Set RBW = 1 % to 5 % of the OBW 4. Set VBW $\geq 3 \cdot$ RBW 5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used. 6. Use the 99 % power bandwidth function of the instrument (if available).

Ref KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Section C. Measurement Bandwidth, Section 1

26 BW Test parameters
X dB BW = -26dB (using the OBW function of the spectrum analyzer) Emission Bandwidth (EBW) a) Set RBW = approximately 1% of the emission bandwidth. b) Set the VBW > RBW. c) Detector = Peak. d) Trace mode = max hold. e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

Tested By: Johanna Knudsen, Julian Land, Mathew Blackburn	Date of testing: 26-JUL-2021 to 28-AUG-2021; 1-SEP-2021 to 4-SEP-2021; 11-SEP-2021 to 14-SEP-2021
Test Result: PASS	

Test Equipment


See Appendix C for list of test equipment

99% and 26dB Bandwidth Table

Frequency (MHz)	Mode	Data Rate (Mbps)	26dB BW (MHz)	99% BW (MHz)
5260	Non HT20, 6 to 54 Mbps	6.0	19.1	16.33
	HT/VHT20, M0 to M7	m0	20.4	17.535
	HE20, M0 to M9 1ss	m0h1	20.9	18.89
5270	Non HT40, 6 to 54 Mbps	6.0	39.2	35.972
	HT/VHT40 Beam Forming, M0 to M7	m0	39.4	35.924
	HE40, M0 to M9 1ss	m0h1	40.9	37.681
5280	Non HT20, 6 to 54 Mbps	6.0	19.1	16.333
	HT/VHT20, M0 to M7	m0	20.4	17.538
	HE20, M0 to M9 2ss	m0h1	20.9	18.902
5290	Non HT80, 6 to 54 Mbps	6.0	79.4	75.462
	VHT80 Beam Forming, M0 to M9 1ss	m0x1	79.5	75.207
	HE80, M0 to M9 1ss	m0h1	80.4	77.054
5300	Non HT20, 6 to 54 Mbps	6.0	19.1	16.332
	HT/VHT20, M0 to M7	m0	20.3	17.54
	HE20, M0 to M9 2ss	m0h1	20.9	18.9
5310	Non HT40, 6 to 54 Mbps	6.0	38.9	35.975
	HT/VHT40 Beam Forming, M0 to M7	m0	39.3	35.923
	HE40 Beam Forming, M0 to M9 1ss	m0h1	40.0	37.672
5320	Non HT20, 6 to 54 Mbps	6.0	19.1	16.329
	HT/VHT20, M0 to M7	m0	20.7	17.532
	HE20, M0 to M9 2ss	m0h1	21.0	18.889

Data Screenshots

5320 MHz: Non HT20, 6 to 54 Mbps

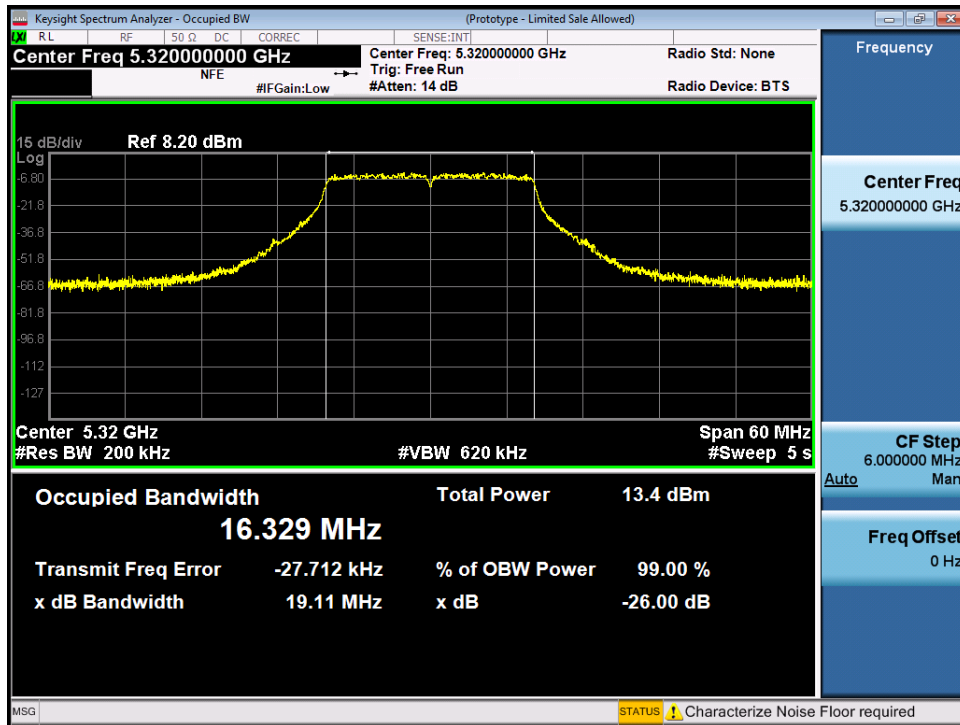


Antenna A

5270 MHz: HT/VHT40 Beam Forming, M0 to M7



Antenna A

5290 MHz: HE80, M0 to M9 1ss

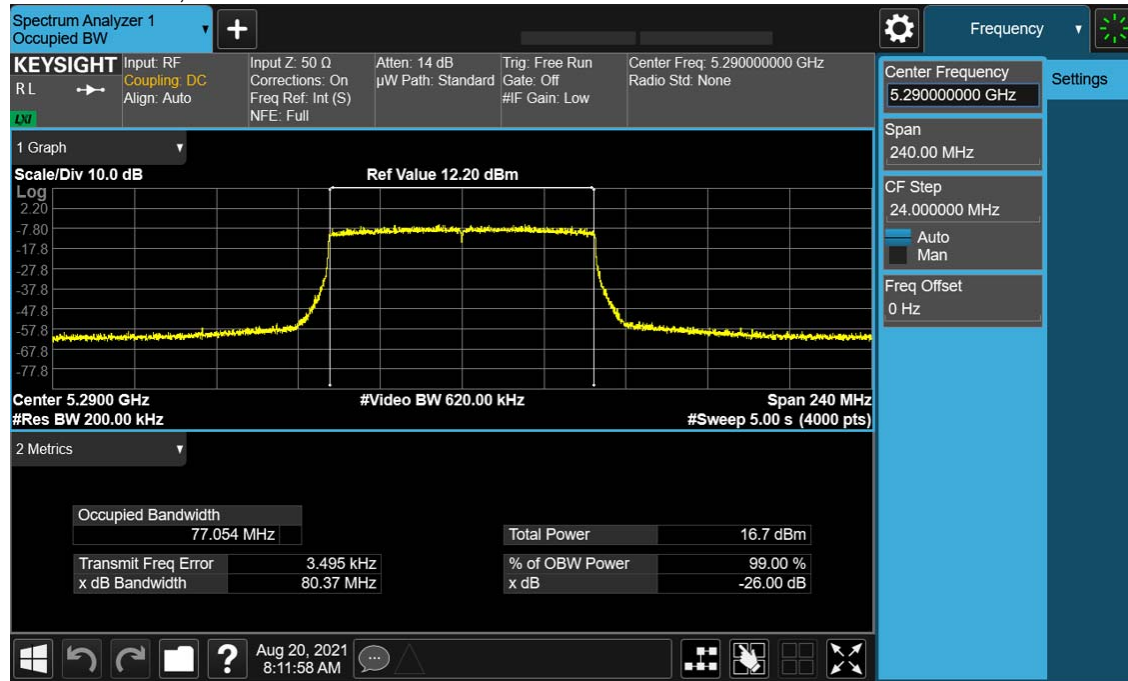

Antenna A

A.3: Maximum Conducted Output Power

Maximum Conducted Output Power Test Requirement

15.407 (2):

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. ... If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

15.407:

(5) The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

Referencing “644545 D03 Guidance for IEEE 802.11ac v01”

Covering signals that cross the boundary between two adjacent UNII bands, the FCC describes a procedure to measure EBW, power, and PSD in each UNII band. For the case of a 160MHz signal equally distributed between UNII-1 and UNII-2a, we apply the following alternate procedure. Rather than measure:

- The half of the signal in UNII-1, measured against the 30dBm power / 17dBm/MHz PSD limits
- The half of the signal in UNII-2a, measured against the 24dBm power / 11dBm/MHz PSD limits

If a 160MHz signal (equally distributed between the two bands) produces a total power of 27dBm across the entire 160 MHz EBW, the total power in each band would be half of the total, or 24dBm (which meets both the UNII-1 and UNII-2a limits) and would have a PSD no greater than 11dBm/MHz in either sub-band.

Given these facts, we have measured the complete 160 MHz EBW (across both sub-bands) against 27dBm power and 11dBm/MHz PSD limits, rather than individual sub band measurements against the individual sub band limits.”

Maximum Conducted Output Power Test Procedure

ANSI C63.10: 2013

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Maximum Conducted Output Power Test Procedure
1. Set the radio in the continuous transmitting mode at full power 2. Compute power by integrating the spectrum across the EBW (or alternatively entire 99% OBW) of the signal using the instrument's band power measurement function. The integration shall be performed using the spectrum analyzer band-power measurement function with band limits set equal to the EBW or the OBW band edges. 3. Capture graphs and record pertinent measurement data.

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v02r01**2. Measurement using a Spectrum Analyzer or EMI Receiver (SA), (d) Method SA-2**

Maximum Conducted Output Power
Test parameters Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction). (i) Measure the duty cycle, x , of the transmitter output signal as described in section II.B. (ii) Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal. (iii) Set RBW = 1 MHz. (iv) Set VBW $\geq$ 3 MHz. (v) Number of points in sweep $\geq$ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.) (vi) Sweep time = auto. (vii) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode. (viii) Do not use sweep triggering. Allow the sweep to “free run”. (ix) Trace average at least 100 traces in power averaging (i.e., RMS) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter. (x) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth)

The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. ANSI C63.10 section 14.3.2.2

Tested By: Johanna Knudsen, Julian Land, Mathew Blackburn	Date of testing: 26-JUL-2021 to 28-AUG-2021; 01-SEP-2021 to 04-SEP-2021; 11-SEP-2021 to 14-SEP-2021
Test Result: PASS	

Test Equipment

See Appendix C for list of test equipment

Maximum Output Power**Frequency 5260 MHz**

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Max Power (dBm)	Tx 2 Max Power (dBm)	Tx 3 Max Power (dBm)	Tx 4 Max Power (dBm)	Duty Cycle (dB)	Total Tx Channel Power (dBm)	Limit (dBm)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	13	13.2				0.23	13.4	17	3.57
Non HT20, 6 to 54 Mbps	2	13	6.4	12.0			0.23	13.3	17	3.7
Non HT20, 6 to 54 Mbps	3	13	2.4	7.5	7.3		0.23	11.3	17	5.75
Non HT20, 6 to 54 Mbps	4	13	-0.9	5.4	5.2	5.1	0.23	10.6	17	6.42
Non HT20 Beam Forming, 6 to 54 Mbps	2	13	6.4	12.0			0.23	13.3	17	3.7
Non HT20 Beam Forming, 6 to 54 Mbps	3	16	2.4	7.5	7.3		0.23	11.3	14	2.75
Non HT20 Beam Forming, 6 to 54 Mbps	4	16	-0.9	5.4	5.2	5.1	0.23	10.6	14	3.42
HT/VHT20, M0 to M7	1	13	13.9				0.22	14.1	17	2.91
HT/VHT20, M0 to M7	2	13	6.3	12.0			0.22	13.2	17	3.78
HT/VHT20, M8 to M15	2	13	6.3	12.0			0.22	13.2	17	3.78
HT/VHT20, M0 to M7	3	13	2.3	7.3	7.0		0.22	11.1	17	5.94
HT/VHT20, M8 to M15	3	13	4.4	10.1	9.3		0.22	13.5	17	3.45
HT/VHT20, M16 to M23	3	13	4.4	10.1	9.3		0.22	13.5	17	3.45
HT/VHT20, M0 to M7	4	13	0.7	6.3	6.1	5.7	0.22	11.4	17	5.56
HT/VHT20, M8 to M15	4	13	3.4	9.1	8.2	8.1	0.22	13.9	17	3.07
HT/VHT20, M16 to M23	4	13	3.4	9.1	8.2	8.1	0.22	13.9	17	3.07
HT/VHT20, M24 to M31	4	13	3.4	9.1	8.2	8.1	0.22	13.9	17	3.07
HT/VHT20 Beam Forming, M0 to M7	2	13	6.3	12.0			0.22	13.2	17	3.78
HT/VHT20 Beam Forming, M8 to M15	2	13	6.3	12.0			0.22	13.2	17	3.78
HT/VHT20 Beam Forming, M0 to M7	3	16	2.3	7.3	7.0		0.22	11.1	14	2.94
HT/VHT20 Beam Forming, M8 to M15	3	13	4.4	10.1	9.3		0.22	13.5	17	3.45
HT/VHT20 Beam Forming, M16 to M23	3	13	4.4	10.1	9.3		0.22	13.5	17	3.45
HT/VHT20 Beam Forming, M0 to M7	4	16	0.7	6.3	6.1	5.7	0.22	11.4	14	2.56
HT/VHT20 Beam Forming, M8 to M15	4	13	3.4	9.1	8.2	8.1	0.22	13.9	17	3.07
HT/VHT20 Beam Forming, M16 to M23	4	13	3.4	9.1	8.2	8.1	0.22	13.9	17	3.07
HT/VHT20 Beam Forming, M24 to M31	4	13	3.4	9.1	8.2	8.1	0.22	13.9	17	3.07
HT/VHT20 STBC, M0 to M7	2	13	6.3	12.0			0.22	13.2	17	3.78
HT/VHT20 STBC, M0 to M7	3	13	4.4	10.1	9.3		0.22	13.5	17	3.45
HT/VHT20 STBC, M0 to M7	4	13	3.4	9.1	8.2	8.1	0.22	13.9	17	3.07
HE20, M0 to M9 1ss	1	13	14.3				0.22	14.5	17	2.5
HE20, M0 to M9 1ss	2	13	6.6	12.2			0.22	13.5	17	3.51
HE20, M0 to M9 2ss	2	13	6.6	12.2			0.22	13.5	17	3.51
HE20, M0 to M9 1ss	3	13	2.7	7.8	7.6		0.22	11.5	17	5.45
HE20, M0 to M9 2ss	3	13	4.8	10.4	9.6		0.22	13.9	17	3.14

HE20, M0 to M9 3ss	3	13	4.8	10.4	9.6		0.22	13.9	17	3.14
HE20, M0 to M9 1ss	4	13	0.7	6.4	6.0	5.9	0.22	11.5	17	5.52
HE20, M0 to M9 2ss	4	13	3.7	9.4	8.6	8.4	0.22	14.2	17	2.76
HE20, M0 to M9 3ss	4	13	3.7	9.4	8.6	8.4	0.22	14.2	17	2.76
HE20, M0 to M9 4ss	4	13	3.7	9.4	8.6	8.4	0.22	14.2	17	2.76
HE20 Beam Forming, M0 to M9 1ss	2	13	6.6	12.2			0.22	13.5	17	3.51
HE20 Beam Forming, M0 to M9 2ss	2	13	6.6	12.2			0.22	13.5	17	3.51
HE20 Beam Forming, M0 to M9 1ss	3	16	2.7	7.8	7.6		0.22	11.5	14	2.45
HE20 Beam Forming, M0 to M9 2ss	3	13	4.8	10.4	9.6		0.22	13.9	17	3.14
HE20 Beam Forming, M0 to M9 3ss	3	13	4.8	10.4	9.6		0.22	13.9	17	3.14
HE20 Beam Forming, M0 to M9 1ss	4	16	0.7	6.4	6.0	5.9	0.22	11.5	14	2.52
HE20 Beam Forming, M0 to M9 2ss	4	13	3.7	9.4	8.6	8.4	0.22	14.2	17	2.76
HE20 Beam Forming, M0 to M9 3ss	4	13	3.7	9.4	8.6	8.4	0.22	14.2	17	2.76
HE20 Beam Forming, M0 to M9 4ss	4	13	3.7	9.4	8.6	8.4	0.22	14.2	17	2.76
HE20 STBC, M0 to M9 2ss	2	13	6.6	12.2			0.22	13.5	17	3.51
HE20 STBC, M0 to M9 2ss	3	13	4.8	10.4	9.6		0.22	13.9	17	3.14
HE20 STBC, M0 to M9 2ss	4	13	3.7	9.4	8.6	8.4	0.22	14.2	17	2.76

Frequency 5270 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Max Power (dBm)	Tx 2 Max Power (dBm)	Tx 3 Max Power (dBm)	Tx 4 Max Power (dBm)	Duty Cycle (dB)	Total Tx Channel Power (dBm)	Limit (dBm)	Margin (dB)
Non HT40, 6 to 54 Mbps	1	13	16.4				0.34	16.7	17	0.3
Non HT40, 6 to 54 Mbps	2	13	8.2	15.5			0.34	16.6	17	0.39
Non HT40, 6 to 54 Mbps	3	13	4.3	10.2	9.6		0.34	13.8	17	3.19
Non HT40, 6 to 54 Mbps	4	13	3.3	9.2	8.4	8.2	0.34	14.1	17	2.85
HT/VHT40, M0 to M7	1	13	16.5				0.32	16.8	17	0.15
HT/VHT40, M0 to M7	2	13	8.2	15.7			0.32	16.7	17	0.28
HT/VHT40, M8 to M15	2	13	8.2	15.7			0.32	16.7	17	0.28
HT/VHT40, M0 to M7	3	13	4.5	10.2	9.5		0.32	13.8	17	3.2
HT/VHT40, M8 to M15	3	13	6.3	12.1	11.6		0.32	15.8	17	1.25
HT/VHT40, M16 to M23	3	13	6.3	12.1	11.6		0.32	15.8	17	1.25
HT/VHT40, M0 to M7	4	13	3.4	9.2	8.4	8.3	0.32	14.1	17	2.85
HT/VHT40, M8 to M15	4	13	5.4	11.0	10.7	10.2	0.32	16.2	17	0.84
HT/VHT40, M16 to M23	4	13	5.4	11.0	10.7	10.2	0.32	16.2	17	0.84
HT/VHT40, M24 to M31	4	13	5.4	11.0	10.7	10.2	0.32	16.2	17	0.84
HT/VHT40 Beam Forming, M0 to M7	2	13	8.2	15.7			0.32	16.7	17	0.28
HT/VHT40 Beam Forming, M8 to M15	2	13	8.2	15.7			0.32	16.7	17	0.28
HT/VHT40 Beam Forming, M0 to M7	3	16	4.5	10.2	9.5		0.32	13.8	14	0.2
HT/VHT40 Beam Forming, M8 to M15	3	13	6.3	12.1	11.6		0.32	15.8	17	1.25
HT/VHT40 Beam Forming, M16 to M23	3	13	6.3	12.1	11.6		0.32	15.8	17	1.25
HT/VHT40 Beam Forming, M0 to M7	4	16	1.2	8.4	8.4	8.2	0.32	13.7	14	0.32
HT/VHT40 Beam Forming, M8 to M15	4	13	5.4	11.0	10.7	10.2	0.32	16.2	17	0.84

HT/VHT40 Beam Forming, M16 to M23	4	13	5.4	11.0	10.7	10.2	0.32	16.2	17	0.84
HT/VHT40 Beam Forming, M24 to M31	4	13	5.4	11.0	10.7	10.2	0.32	16.2	17	0.84
HT/VHT40 STBC, M0 to M7	2	13	8.2	15.7			0.32	16.7	17	0.28
HT/VHT40 STBC, M0 to M7	3	13	6.3	12.1	11.6		0.32	15.8	17	1.25
HT/VHT40 STBC, M0 to M7	4	13	5.4	11.0	10.7	10.2	0.32	16.2	17	0.84
HE40, M0 to M9 1ss	1	13	16.2				0.29	16.5	17	0.53
HE40, M0 to M9 1ss	2	13	7.7	15.1			0.29	16.1	17	0.89
HE40, M0 to M9 2ss	2	13	7.7	15.1			0.29	16.1	17	0.89
HE40, M0 to M9 1ss	3	13	4.9	10.7	9.9		0.29	14.2	17	2.8
HE40, M0 to M9 2ss	3	13	6.8	12.5	12.1		0.29	16.2	17	0.83
HE40, M0 to M9 3ss	3	13	6.8	12.5	12.1		0.29	16.2	17	0.83
HE40, M0 to M9 1ss	4	13	3.8	9.7	8.8	8.7	0.29	14.6	17	2.45
HE40, M0 to M9 2ss	4	13	5.8	11.6	11.2	10.7	0.29	16.6	17	0.37
HE40, M0 to M9 3ss	4	13	5.8	11.6	11.2	10.7	0.29	16.6	17	0.37
HE40, M0 to M9 4ss	4	13	5.8	11.6	11.2	10.7	0.29	16.6	17	0.37
HE40 Beam Forming, M0 to M9 1ss	2	13	7.7	15.1			0.29	16.1	17	0.89
HE40 Beam Forming, M0 to M9 2ss	2	13	7.7	15.1			0.29	16.1	17	0.89
HE40 Beam Forming, M0 to M9 1ss	3	16	3.8	9.7	8.8		0.29	13.1	14	0.86
HE40 Beam Forming, M0 to M9 2ss	3	13	6.8	12.5	12.1		0.29	16.2	17	0.83
HE40 Beam Forming, M0 to M9 3ss	3	13	6.8	12.5	12.1		0.29	16.2	17	0.83
HE40 Beam Forming, M0 to M9 1ss	4	16	2.8	7.9	7.8	7.7	0.29	13.3	14	0.68
HE40 Beam Forming, M0 to M9 2ss	4	13	5.8	11.6	11.2	10.7	0.29	16.6	17	0.37
HE40 Beam Forming, M0 to M9 3ss	4	13	5.8	11.6	11.2	10.7	0.29	16.6	17	0.37
HE40 Beam Forming, M0 to M9 4ss	4	13	5.8	11.6	11.2	10.7	0.29	16.6	17	0.37
HE40 STBC, M0 to M9 2ss	2	13	7.7	15.1			0.29	16.1	17	0.89
HE40 STBC, M0 to M9 2ss	3	13	6.8	12.5	12.1		0.29	16.2	17	0.83
HE40 STBC, M0 to M9 2ss	4	13	5.8	11.6	11.2	10.7	0.29	16.6	17	0.37

Frequency 5280 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Max Power (dBm)	Tx 2 Max Power (dBm)	Tx 3 Max Power (dBm)	Tx 4 Max Power (dBm)	Duty Cycle (dB)	Total Tx Channel Power (dBm)	Limit (dBm)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	13	13.8				0.23	14.0	17	3.02
Non HT20, 6 to 54 Mbps	2	13	6.1	12.0			0.23	13.2	17	3.75
Non HT20, 6 to 54 Mbps	3	13	1.7	6.4	6.4		0.23	10.3	17	6.67
Non HT20, 6 to 54 Mbps	4	13	-0.4	5.4	5.0	4.0	0.23	10.2	17	6.75
Non HT20 Beam Forming, 6 to 54 Mbps	2	13	6.1	12.0			0.23	13.2	17	3.75
Non HT20 Beam Forming, 6 to 54 Mbps	3	16	1.7	6.4	6.4		0.23	10.3	14	3.67
Non HT20 Beam Forming, 6 to 54 Mbps	4	16	-0.4	5.4	5.0	4.0	0.23	10.2	14	3.75
HT/VHT20, M0 to M7	1	13	13.6				0.22	13.8	17	3.23
HT/VHT20, M0 to M7	2	13	6.0	11.8			0.22	13.0	17	3.95
HT/VHT20, M8 to M15	2	13	6.0	11.8			0.22	13.0	17	3.95
HT/VHT20, M0 to M7	3	13	2.3	7.3	7.2		0.22	11.1	17	5.86
HT/VHT20, M8 to M15	3	13	5.0	11.0	10.5		0.22	14.6	17	2.44
HT/VHT20, M16 to M23	3	13	5.0	11.0	10.5		0.22	14.6	17	2.44
HT/VHT20, M0 to M7	4	13	0.4	6.3	5.8	5.4	0.22	11.2	17	5.77
HT/VHT20, M8 to M15	4	13	3.0	9.1	8.1	8.1	0.22	13.9	17	3.14
HT/VHT20, M16 to M23	4	13	3.0	9.1	8.1	8.1	0.22	13.9	17	3.14
HT/VHT20, M24 to M31	4	13	3.0	9.1	8.1	8.1	0.22	13.9	17	3.14
HT/VHT20 Beam Forming, M0 to M7	2	13	6.0	11.8			0.22	13.0	17	3.95
HT/VHT20 Beam Forming, M8 to M15	2	13	6.0	11.8			0.22	13.0	17	3.95
HT/VHT20 Beam Forming, M0 to M7	3	16	2.3	7.3	7.2		0.22	11.1	14	2.86
HT/VHT20 Beam Forming, M8 to M15	3	13	5.0	11.0	10.5		0.22	14.6	17	2.44
HT/VHT20 Beam Forming, M16 to M23	3	13	5.0	11.0	10.5		0.22	14.6	17	2.44
HT/VHT20 Beam Forming, M0 to M7	4	16	0.4	6.3	5.8	5.4	0.22	11.2	14	2.77
HT/VHT20 Beam Forming, M8 to M15	4	13	3.0	9.1	8.1	8.1	0.22	13.9	17	3.14
HT/VHT20 Beam Forming, M16 to M23	4	13	3.0	9.1	8.1	8.1	0.22	13.9	17	3.14
HT/VHT20 Beam Forming, M24 to M31	4	13	3.0	9.1	8.1	8.1	0.22	13.9	17	3.14
HT/VHT20 STBC, M0 to M7	2	13	6.0	11.8			0.22	13.0	17	3.95
HT/VHT20 STBC, M0 to M7	3	13	5.0	11.0	10.5		0.22	14.6	17	2.44
HT/VHT20 STBC, M0 to M7	4	13	3.0	9.1	8.1	8.1	0.22	13.9	17	3.14
HE20, M0 to M9 1ss	1	13	13.9				0.22	14.1	17	2.87
HE20, M0 to M9 1ss	2	13	6.3	12.4			0.22	13.5	17	3.46
HE20, M0 to M9 2ss	2	13	6.3	12.4			0.22	13.5	17	3.46
HE20, M0 to M9 1ss	3	13	2.8	7.7	7.6		0.22	11.5	17	5.45
HE20, M0 to M9 2ss	3	13	4.5	10.5	9.7		0.22	13.9	17	3.08
HE20, M0 to M9 3ss	3	13	4.5	10.5	9.7		0.22	13.9	17	3.08
HE20, M0 to M9 1ss	4	13	0.4	6.2	5.7	5.4	0.22	11.2	17	5.82

HE20, M0 to M9 2ss	4	13	3.4	9.5	8.6	8.5	0.22	14.3	17	2.72
HE20, M0 to M9 3ss	4	13	3.4	9.5	8.6	8.5	0.22	14.3	17	2.72
HE20, M0 to M9 4ss	4	13	3.4	9.5	8.6	8.5	0.22	14.3	17	2.72
HE20 Beam Forming, M0 to M9 1ss	2	13	6.3	12.4			0.22	13.5	17	3.46
HE20 Beam Forming, M0 to M9 2ss	2	13	6.3	12.4			0.22	13.5	17	3.46
HE20 Beam Forming, M0 to M9 1ss	3	16	2.8	7.7	7.6		0.22	11.5	14	2.45
HE20 Beam Forming, M0 to M9 2ss	3	13	4.5	10.5	9.7		0.22	13.9	17	3.08
HE20 Beam Forming, M0 to M9 3ss	3	13	4.5	10.5	9.7		0.22	13.9	17	3.08
HE20 Beam Forming, M0 to M9 1ss	4	16	0.4	6.2	5.7	5.4	0.22	11.2	14	2.82
HE20 Beam Forming, M0 to M9 2ss	4	13	3.4	9.5	8.6	8.5	0.22	14.3	17	2.72
HE20 Beam Forming, M0 to M9 3ss	4	13	3.4	9.5	8.6	8.5	0.22	14.3	17	2.72
HE20 Beam Forming, M0 to M9 4ss	4	13	3.4	9.5	8.6	8.5	0.22	14.3	17	2.72
HE20 STBC, M0 to M9 2ss	2	13	6.3	12.4			0.22	13.5	17	3.46
HE20 STBC, M0 to M9 2ss	3	13	4.5	10.5	9.7		0.22	13.9	17	3.08
HE20 STBC, M0 to M9 2ss	4	13	3.4	9.5	8.6	8.5	0.22	14.3	17	2.72

Frequency 5290 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Max Power (dBm)	Tx 2 Max Power (dBm)	Tx 3 Max Power (dBm)	Tx 4 Max Power (dBm)	Duty Cycle (dB)	Total Tx Channel Power (dBm)	Limit (dBm)	Margin (dB)
Non HT80, 6 to 54 Mbps	1	13	7.8				0.28	8.1	17	8.94
Non HT80, 6 to 54 Mbps	2	13	4.8	10.9			0.28	12.1	17	4.85
Non HT80, 6 to 54 Mbps	3	13	4.0	9.9	9.4		0.28	13.5	17	3.5
Non HT80, 6 to 54 Mbps	4	13	4.0	9.9	9.4	9.5	0.28	15.0	17	1.97
VHT80, M0 to M9 1ss	1	13	10.6				0.35	10.9	17	6.09
VHT80, M0 to M9 1ss	2	13	4.9	10.9			0.33	12.2	17	4.78
VHT80, M0 to M9 2ss	2	13	4.9	10.9			0.33	12.2	17	4.78
VHT80, M0 to M9 1ss	3	13	4.0	10.0	9.5		0.33	13.6	17	3.38
VHT80, M0 to M9 2ss	3	13	4.0	10.0	9.5		0.33	13.6	17	3.38
VHT80, M0 to M9 3ss	3	13	4.0	10.0	9.5		0.33	13.6	17	3.38
VHT80, M0 to M9 1ss	4	13	3.0	9.1	8.3	8.5	0.33	14.1	17	2.88
VHT80, M0 to M9 2ss	4	13	3.0	9.1	8.3	8.5	0.33	14.1	17	2.88
VHT80, M0 to M9 3ss	4	13	3.0	9.1	8.3	8.5	0.33	14.1	17	2.88
VHT80, M0 to M9 4ss	4	13	3.0	9.1	8.3	8.5	0.33	14.1	17	2.88
VHT80 Beam Forming, M0 to M9 1ss	2	13	4.9	10.9			0.33	12.2	17	4.78
VHT80 Beam Forming, M0 to M9 2ss	2	13	4.9	10.9			0.33	12.2	17	4.78
VHT80 Beam Forming, M0 to M9 1ss	3	16	2.3	6.9	6.9		0.33	11.0	14	3.04
VHT80 Beam Forming, M0 to M9 2ss	3	13	4.0	10.0	9.5		0.33	13.6	17	3.38
VHT80 Beam Forming, M0 to M9 3ss	3	13	4.0	10.0	9.5		0.33	13.6	17	3.38
VHT80 Beam Forming, M0 to M9 1ss	4	16	0.9	5.8	6.1	5.9	0.33	11.5	14	2.49
VHT80 Beam Forming, M0 to M9 2ss	4	13	3.0	9.1	8.3	8.5	0.33	14.1	17	2.88
VHT80 Beam Forming, M0 to M9 3ss	4	13	3.0	9.1	8.3	8.5	0.33	14.1	17	2.88

VHT80 Beam Forming, M0 to M9 4ss	4	13	3.0	9.1	8.3	8.5	0.33	14.1	17	2.88
VHT80 STBC, M0 to M9 1ss	2	13	4.9	10.9			0.33	12.2	17	4.78
VHT80 STBC, M0 to M9 1ss	3	13	4.0	10.0	9.5		0.33	13.6	17	3.38
VHT80 STBC, M0 to M9 1ss	4	13	3.0	9.1	8.3	8.5	0.33	14.1	17	2.88
HE80, M0 to M9 1ss	1	13	13.0				0.23	13.3	17	3.73
HE80, M0 to M9 1ss	2	13	4.6	10.6			0.23	11.8	17	5.18
HE80, M0 to M9 2ss	2	13	4.6	10.6			0.23	11.8	17	5.18
HE80, M0 to M9 1ss	3	13	3.7	9.7	8.9		0.23	13.1	17	3.86
HE80, M0 to M9 2ss	3	13	3.7	9.7	8.9		0.23	13.1	17	3.86
HE80, M0 to M9 3ss	3	13	3.7	9.7	8.9		0.23	13.1	17	3.86
HE80, M0 to M9 1ss	4	13	2.7	9.7	9.8	9.8	0.23	15.0	17	1.95
HE80, M0 to M9 2ss	4	13	2.7	9.7	9.8	9.8	0.23	15.0	17	1.95
HE80, M0 to M9 3ss	4	13	2.7	9.7	9.8	9.8	0.23	15.0	17	1.95
HE80, M0 to M9 4ss	4	13	2.7	9.7	9.8	9.8	0.23	15.0	17	1.95
HE80 Beam Forming, M0 to M9 1ss	2	13	4.6	10.6			0.23	11.8	17	5.18
HE80 Beam Forming, M0 to M9 2ss	2	13	4.6	10.6			0.23	11.8	17	5.18
HE80 Beam Forming, M0 to M9 1ss	3	16	1.7	6.5	6.8		0.23	10.5	14	3.46
HE80 Beam Forming, M0 to M9 2ss	3	13	3.7	9.7	8.9		0.23	13.1	17	3.86
HE80 Beam Forming, M0 to M9 3ss	3	13	3.7	9.7	8.9		0.23	13.1	17	3.86
HE80 Beam Forming, M0 to M9 1ss	4	16	1.7	6.5	6.8	6.6	0.23	12.1	14	1.92
HE80 Beam Forming, M0 to M9 2ss	4	13	2.7	9.7	9.8	9.8	0.23	15.0	17	1.95
HE80 Beam Forming, M0 to M9 3ss	4	13	2.7	9.7	9.8	9.8	0.23	15.0	17	1.95
HE80 Beam Forming, M0 to M9 4ss	4	13	2.7	9.7	9.8	9.8	0.23	15.0	17	1.95
HE80 STBC, M0 to M9 1ss	2	13	4.6	10.6			0.23	11.8	17	5.18
HE80 STBC, M0 to M9 1ss	3	13	3.7	9.7	8.9		0.23	13.1	17	3.86
HE80 STBC, M0 to M9 1ss	4	13	2.7	9.7	9.8	9.8	0.23	15.0	17	1.95

Frequency 5300 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Max Power (dBm)	Tx 2 Max Power (dBm)	Tx 3 Max Power (dBm)	Tx 4 Max Power (dBm)	Duty Cycle (dB)	Total Tx Channel Power (dBm)	Limit (dBm)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	13	14.1				0.23	14.3	17	2.69
Non HT20, 6 to 54 Mbps	2	13	5.6	12.1			0.23	13.2	17	3.78
Non HT20, 6 to 54 Mbps	3	13	1.5	6.3	6.6		0.23	10.3	17	6.69
Non HT20, 6 to 54 Mbps	4	13	-0.1	5.4	5.1	4.2	0.23	10.4	17	6.61
Non HT20 Beam Forming, 6 to 54 Mbps	2	13	5.6	12.1			0.23	13.2	17	3.78
Non HT20 Beam Forming, 6 to 54 Mbps	3	16	1.5	6.3	6.6		0.23	10.3	14	3.69
Non HT20 Beam Forming, 6 to 54 Mbps	4	16	-0.1	5.4	5.1	4.2	0.23	10.4	14	3.61
HT/VHT20, M0 to M7	1	13	13.9				0.22	14.1	17	2.93
HT/VHT20, M0 to M7	2	13	5.4	11.8			0.22	12.9	17	4.05
HT/VHT20, M8 to M15	2	13	5.4	11.8			0.22	12.9	17	4.05
HT/VHT20, M0 to M7	3	13	2.8	7.3	7.3		0.22	11.2	17	5.77
HT/VHT20, M8 to M15	3	13	4.5	10.8	10.6		0.22	14.4	17	2.56
HT/VHT20, M16 to M23	3	13	4.5	10.8	10.6		0.22	14.4	17	2.56
HT/VHT20, M0 to M7	4	13	0.7	6.2	6.0	5.6	0.22	11.3	17	5.69
HT/VHT20, M8 to M15	4	13	2.8	9.0	8.2	8.3	0.22	13.9	17	3.14
HT/VHT20, M16 to M23	4	13	2.8	9.0	8.2	8.3	0.22	13.9	17	3.14
HT/VHT20, M24 to M31	4	13	2.8	9.0	8.2	8.3	0.22	13.9	17	3.14
HT/VHT20 Beam Forming, M0 to M7	2	13	5.4	11.8			0.22	12.9	17	4.05
HT/VHT20 Beam Forming, M8 to M15	2	13	5.4	11.8			0.22	12.9	17	4.05
HT/VHT20 Beam Forming, M0 to M7	3	16	2.8	7.3	7.3		0.22	11.2	14	2.77
HT/VHT20 Beam Forming, M8 to M15	3	13	4.5	10.8	10.6		0.22	14.4	17	2.56
HT/VHT20 Beam Forming, M16 to M23	3	13	4.5	10.8	10.6		0.22	14.4	17	2.56
HT/VHT20 Beam Forming, M0 to M7	4	16	0.7	6.2	6.0	5.6	0.22	11.3	14	2.69
HT/VHT20 Beam Forming, M8 to M15	4	13	2.8	9.0	8.2	8.3	0.22	13.9	17	3.14
HT/VHT20 Beam Forming, M16 to M23	4	13	2.8	9.0	8.2	8.3	0.22	13.9	17	3.14
HT/VHT20 Beam Forming, M24 to M31	4	13	2.8	9.0	8.2	8.3	0.22	13.9	17	3.14
HT/VHT20 STBC, M0 to M7	2	13	5.4	11.8			0.22	12.9	17	4.05
HT/VHT20 STBC, M0 to M7	3	13	4.5	10.8	10.6		0.22	14.4	17	2.56
HT/VHT20 STBC, M0 to M7	4	13	2.8	9.0	8.2	8.3	0.22	13.9	17	3.14
HE20, M0 to M9 1ss	1	13	14.3				0.22	14.6	17	2.44
HE20, M0 to M9 1ss	2	13	5.8	12.2			0.22	13.4	17	3.65
HE20, M0 to M9 2ss	2	13	5.8	12.2			0.22	13.4	17	3.65
HE20, M0 to M9 1ss	3	13	3.2	7.5	7.7		0.22	11.6	17	5.44
HE20, M0 to M9 2ss	3	13	3.9	10.4	9.8		0.22	13.8	17	3.19
HE20, M0 to M9 3ss	3	13	3.9	10.4	9.8		0.22	13.8	17	3.19
HE20, M0 to M9 1ss	4	13	0.7	6.2	6.0	5.5	0.22	11.3	17	5.68

HE20, M0 to M9 2ss	4	13	3.1	9.4	8.7	8.8	0.22	14.3	17	2.68
HE20, M0 to M9 3ss	4	13	3.1	9.4	8.7	8.8	0.22	14.3	17	2.68
HE20, M0 to M9 4ss	4	13	3.1	9.4	8.7	8.8	0.22	14.3	17	2.68
HE20 Beam Forming, M0 to M9 1ss	2	13	5.8	12.2			0.22	13.4	17	3.65
HE20 Beam Forming, M0 to M9 2ss	2	13	5.8	12.2			0.22	13.4	17	3.65
HE20 Beam Forming, M0 to M9 1ss	3	16	3.2	7.5	7.7		0.22	11.6	14	2.44
HE20 Beam Forming, M0 to M9 2ss	3	13	3.9	10.4	9.8		0.22	13.8	17	3.19
HE20 Beam Forming, M0 to M9 3ss	3	13	3.9	10.4	9.8		0.22	13.8	17	3.19
HE20 Beam Forming, M0 to M9 1ss	4	16	0.7	6.2	6.0	5.5	0.22	11.3	14	2.68
HE20 Beam Forming, M0 to M9 2ss	4	13	3.1	9.4	8.7	8.8	0.22	14.3	17	2.68
HE20 Beam Forming, M0 to M9 3ss	4	13	3.1	9.4	8.7	8.8	0.22	14.3	17	2.68
HE20 Beam Forming, M0 to M9 4ss	4	13	3.1	9.4	8.7	8.8	0.22	14.3	17	2.68
HE20 STBC, M0 to M9 2ss	2	13	5.8	12.2			0.22	13.4	17	3.65
HE20 STBC, M0 to M9 2ss	3	13	3.9	10.4	9.8		0.22	13.8	17	3.19
HE20 STBC, M0 to M9 2ss	4	13	3.1	9.4	8.7	8.8	0.22	14.3	17	2.68

Frequency 5310 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Max Power (dBm)	Tx 2 Max Power (dBm)	Tx 3 Max Power (dBm)	Tx 4 Max Power (dBm)	Duty Cycle (dB)	Total Tx Channel Power (dBm)	Limit (dBm)	Margin (dB)
Non HT40, 6 to 54 Mbps	1	13	9.7				0.34	10.0	17	7.0
Non HT40, 6 to 54 Mbps	2	13	5.0	10.9			0.34	12.2	17	4.8
Non HT40, 6 to 54 Mbps	3	13	4.1	10.0	9.4		0.34	13.6	17	3.38
Non HT40, 6 to 54 Mbps	4	13	1.2	8.2	8.3	8.2	0.34	13.6	17	3.36
HT/VHT40, M0 to M7	1	13	12.5				0.32	12.9	17	4.13
HT/VHT40, M0 to M7	2	13	6.1	11.9			0.32	13.3	17	3.74
HT/VHT40, M8 to M15	2	13	6.1	11.9			0.32	13.3	17	3.74
HT/VHT40, M0 to M7	3	13	4.1	10.0	9.4		0.32	13.6	17	3.43
HT/VHT40, M8 to M15	3	13	5.1	10.9	10.7		0.32	14.7	17	2.34
HT/VHT40, M16 to M23	3	13	5.1	10.9	10.7		0.32	14.7	17	2.34
HT/VHT40, M0 to M7	4	13	3.1	9.1	8.2	8.4	0.32	14.0	17	2.95
HT/VHT40, M8 to M15	4	13	3.1	9.1	8.2	8.4	0.32	14.0	17	2.95
HT/VHT40, M16 to M23	4	13	3.1	9.1	8.2	8.4	0.32	14.0	17	2.95
HT/VHT40, M24 to M31	4	13	3.1	9.1	8.2	8.4	0.32	14.0	17	2.95
HT/VHT40 Beam Forming, M0 to M7	2	13	6.1	11.9			0.32	13.3	17	3.74
HT/VHT40 Beam Forming, M8 to M15	2	13	6.1	11.9			0.32	13.3	17	3.74
HT/VHT40 Beam Forming, M0 to M7	3	16	3.1	9.1	8.2		0.32	12.5	14	1.45
HT/VHT40 Beam Forming, M8 to M15	3	13	5.1	10.9	10.7		0.32	14.7	17	2.34
HT/VHT40 Beam Forming, M16 to M23	3	13	5.1	10.9	10.7		0.32	14.7	17	2.34
HT/VHT40 Beam Forming, M0 to M7	4	16	2.7	7.3	7.3	7.1	0.32	12.8	14	1.19
HT/VHT40 Beam Forming, M8 to M15	4	13	3.1	9.1	8.2	8.4	0.32	14.0	17	2.95
HT/VHT40 Beam Forming, M16 to M23	4	13	3.1	9.1	8.2	8.4	0.32	14.0	17	2.95

HT/VHT40 Beam Forming, M24 to M31	4	13	3.1	9.1	8.2	8.4	0.32	14.0	17	2.95
HT/VHT40 STBC, M0 to M7	2	13	6.1	11.9			0.32	13.3	17	3.74
HT/VHT40 STBC, M0 to M7	3	13	5.1	10.9	10.7		0.32	14.7	17	2.34
HT/VHT40 STBC, M0 to M7	4	13	3.1	9.1	8.2	8.4	0.32	14.0	17	2.95
HE40, M0 to M9 1ss	1	13	13.0				0.29	13.3	17	3.69
HE40, M0 to M9 1ss	2	13	5.4	11.4			0.29	12.7	17	4.35
HE40, M0 to M9 2ss	2	13	5.4	11.4			0.29	12.7	17	4.35
HE40, M0 to M9 1ss	3	13	4.4	10.5	9.9		0.29	14.0	17	2.99
HE40, M0 to M9 2ss	3	13	4.4	10.5	9.9		0.29	14.0	17	2.99
HE40, M0 to M9 3ss	3	13	4.4	10.5	9.9		0.29	14.0	17	2.99
HE40, M0 to M9 1ss	4	13	3.6	9.5	8.8	8.9	0.29	14.5	17	2.48
HE40, M0 to M9 2ss	4	13	3.6	9.5	8.8	8.9	0.29	14.5	17	2.48
HE40, M0 to M9 3ss	4	13	3.6	9.5	8.8	8.9	0.29	14.5	17	2.48
HE40, M0 to M9 4ss	4	13	3.6	9.5	8.8	8.9	0.29	14.5	17	2.48
HE40 Beam Forming, M0 to M9 1ss	2	13	5.4	11.4			0.29	12.7	17	4.35
HE40 Beam Forming, M0 to M9 2ss	2	13	5.4	11.4			0.29	12.7	17	4.35
HE40 Beam Forming, M0 to M9 1ss	3	16	3.2	7.7	7.8		0.29	11.8	14	2.24
HE40 Beam Forming, M0 to M9 2ss	3	13	4.4	10.5	9.9		0.29	14.0	17	2.99
HE40 Beam Forming, M0 to M9 3ss	3	13	4.4	10.5	9.9		0.29	14.0	17	2.99
HE40 Beam Forming, M0 to M9 1ss	4	16	1.7	6.5	6.8	6.6	0.29	12.1	14	1.85
HE40 Beam Forming, M0 to M9 2ss	4	13	3.6	9.5	8.8	8.9	0.29	14.5	17	2.48
HE40 Beam Forming, M0 to M9 3ss	4	13	3.6	9.5	8.8	8.9	0.29	14.5	17	2.48
HE40 Beam Forming, M0 to M9 4ss	4	13	3.6	9.5	8.8	8.9	0.29	14.5	17	2.48
HE40 STBC, M0 to M9 2ss	2	13	5.4	11.4			0.29	12.7	17	4.35
HE40 STBC, M0 to M9 2ss	3	13	4.4	10.5	9.9		0.29	14.0	17	2.99
HE40 STBC, M0 to M9 2ss	4	13	3.6	9.5	8.8	8.9	0.29	14.5	17	2.48


Frequency 5320 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Max Power (dBm)	Tx 2 Max Power (dBm)	Tx 3 Max Power (dBm)	Tx 4 Max Power (dBm)	Duty Cycle (dB)	Total Tx Channel Power (dBm)	Limit (dBm)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	13	14.0				0.23	14.2	17	2.79
Non HT20, 6 to 54 Mbps	2	13	6.3	12.2			0.23	13.4	17	3.56
Non HT20, 6 to 54 Mbps	3	13	1.6	6.1	6.5		0.23	10.3	17	6.75
Non HT20, 6 to 54 Mbps	4	13	-0.1	5.3	4.4	4.4	0.23	10.2	17	6.83
Non HT20 Beam Forming, 6 to 54 Mbps	2	13	6.3	12.2			0.23	13.4	17	3.56
Non HT20 Beam Forming, 6 to 54 Mbps	3	16	1.6	6.1	6.5		0.23	10.3	14	3.75
Non HT20 Beam Forming, 6 to 54 Mbps	4	16	-0.1	5.3	4.4	4.4	0.23	10.2	14	3.83
HT/VHT20, M0 to M7	1	13	13.8				0.22	14.0	17	3.0
HT/VHT20, M0 to M7	2	13	6.1	12.0			0.22	13.2	17	3.79
HT/VHT20, M8 to M15	2	13	6.1	12.0			0.22	13.2	17	3.79
HT/VHT20, M0 to M7	3	13	2.4	7.1	7.2		0.22	11.1	17	5.93
HT/VHT20, M8 to M15	3	13	4.1	10.1	9.5		0.22	13.6	17	3.42
HT/VHT20, M16 to M23	3	13	4.1	10.1	9.5		0.22	13.6	17	3.42
HT/VHT20, M0 to M7	4	13	0.8	6.1	5.8	5.5	0.22	11.2	17	5.76
HT/VHT20, M8 to M15	4	13	3.2	9.1	8.2	8.2	0.22	13.9	17	3.07
HT/VHT20, M16 to M23	4	13	3.2	9.1	8.2	8.2	0.22	13.9	17	3.07
HT/VHT20, M24 to M31	4	13	3.2	9.1	8.2	8.2	0.22	13.9	17	3.07
HT/VHT20 Beam Forming, M0 to M7	2	13	6.1	12.0			0.22	13.2	17	3.79
HT/VHT20 Beam Forming, M8 to M15	2	13	6.1	12.0			0.22	13.2	17	3.79
HT/VHT20 Beam Forming, M0 to M7	3	16	2.4	7.1	7.2		0.22	11.1	14	2.93
HT/VHT20 Beam Forming, M8 to M15	3	13	4.1	10.1	9.5		0.22	13.6	17	3.42
HT/VHT20 Beam Forming, M16 to M23	3	13	4.1	10.1	9.5		0.22	13.6	17	3.42
HT/VHT20 Beam Forming, M0 to M7	4	16	0.8	6.1	5.8	5.5	0.22	11.2	14	2.76
HT/VHT20 Beam Forming, M8 to M15	4	13	3.2	9.1	8.2	8.2	0.22	13.9	17	3.07
HT/VHT20 Beam Forming, M16 to M23	4	13	3.2	9.1	8.2	8.2	0.22	13.9	17	3.07
HT/VHT20 Beam Forming, M24 to M31	4	13	3.2	9.1	8.2	8.2	0.22	13.9	17	3.07
HT/VHT20 STBC, M0 to M7	2	13	6.1	12.0			0.22	13.2	17	3.79
HT/VHT20 STBC, M0 to M7	3	13	4.1	10.1	9.5		0.22	13.6	17	3.42
HT/VHT20 STBC, M0 to M7	4	13	3.2	9.1	8.2	8.2	0.22	13.9	17	3.07
HE20, M0 to M9 1ss	1	13	13.3				0.22	13.5	17	3.5
HE20, M0 to M9 1ss	2	13	6.5	12.4			0.22	13.6	17	3.39
HE20, M0 to M9 2ss	2	13	6.5	12.4			0.22	13.6	17	3.39
HE20, M0 to M9 1ss	3	13	2.7	7.5	7.6		0.22	11.5	17	5.53
HE20, M0 to M9 2ss	3	13	4.5	10.5	9.9		0.22	14.0	17	3.0
HE20, M0 to M9 3ss	3	13	4.5	10.5	9.9		0.22	14.0	17	3.0
HE20, M0 to M9 1ss	4	13	0.7	6.0	5.7	5.4	0.22	11.1	17	5.86

HE20, M0 to M9 2ss	4	13	3.6	9.4	8.6	8.6	0.22	14.3	17	2.71
HE20, M0 to M9 3ss	4	13	3.6	9.4	8.6	8.6	0.22	14.3	17	2.71
HE20, M0 to M9 4ss	4	13	3.6	9.4	8.6	8.6	0.22	14.3	17	2.71
HE20 Beam Forming, M0 to M9 1ss	2	13	6.5	12.4			0.22	13.6	17	3.39
HE20 Beam Forming, M0 to M9 2ss	2	13	6.5	12.4			0.22	13.6	17	3.39
HE20 Beam Forming, M0 to M9 1ss	3	16	2.7	7.5	7.6		0.22	11.5	14	2.53
HE20 Beam Forming, M0 to M9 2ss	3	13	4.5	10.5	9.9		0.22	14.0	17	3.0
HE20 Beam Forming, M0 to M9 3ss	3	13	4.5	10.5	9.9		0.22	14.0	17	3.0
HE20 Beam Forming, M0 to M9 1ss	4	16	0.7	6.0	5.7	5.4	0.22	11.1	14	2.86
HE20 Beam Forming, M0 to M9 2ss	4	13	3.6	9.4	8.6	8.6	0.22	14.3	17	2.71
HE20 Beam Forming, M0 to M9 3ss	4	13	3.6	9.4	8.6	8.6	0.22	14.3	17	2.71
HE20 Beam Forming, M0 to M9 4ss	4	13	3.6	9.4	8.6	8.6	0.22	14.3	17	2.71
HE20 STBC, M0 to M9 2ss	2	13	6.5	12.4			0.22	13.6	17	3.39
HE20 STBC, M0 to M9 2ss	3	13	4.5	10.5	9.9		0.22	14.0	17	3.0
HE20 STBC, M0 to M9 2ss	4	13	3.6	9.4	8.6	8.6	0.22	14.3	17	2.71


Data Screenshots

5270 MHz: HT/VHT40, M0 to M7

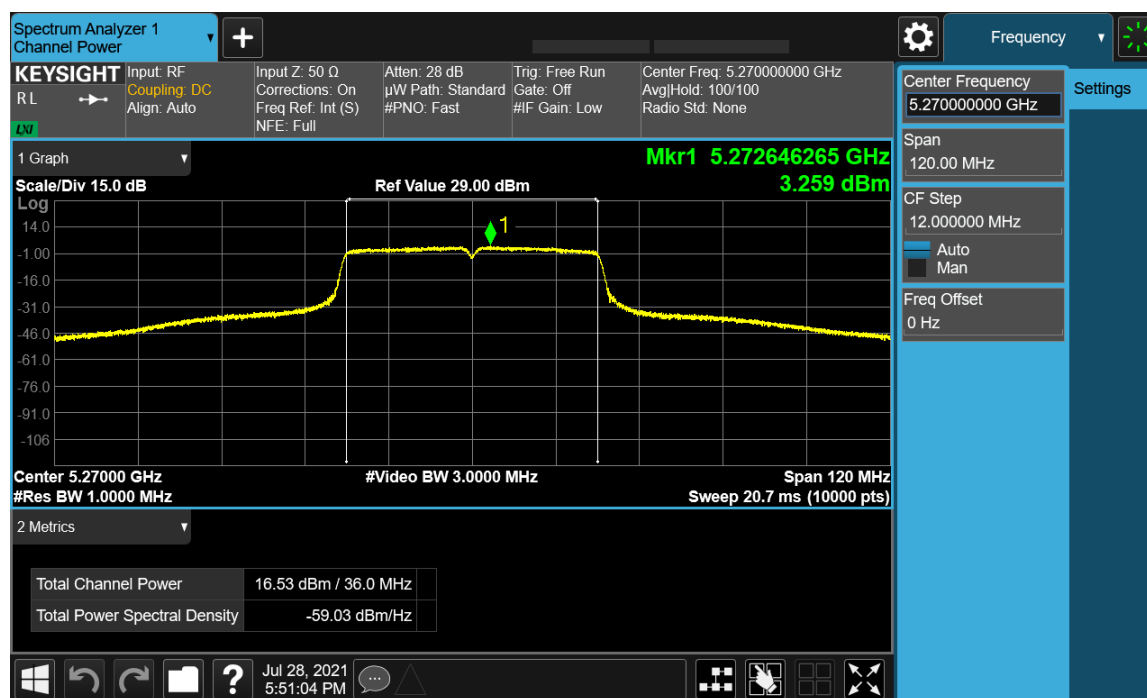


Antenna A

5270 MHz: HT/VHT40 Beam Forming, M0 to M7

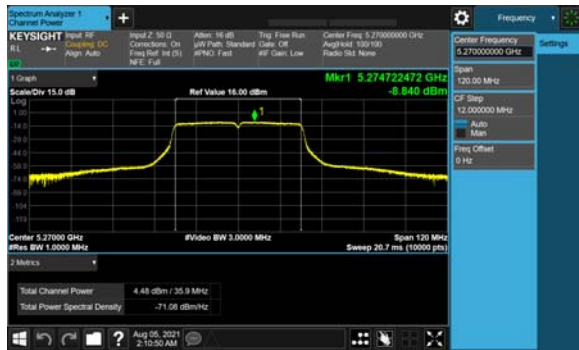

Antenna A

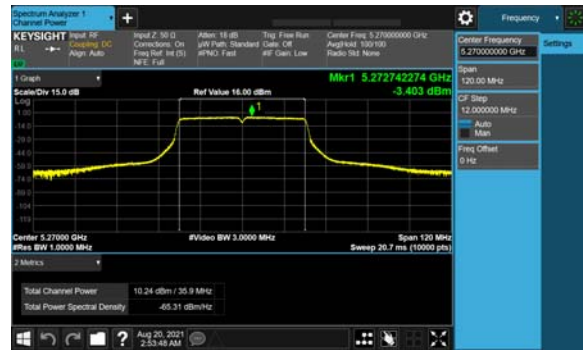


Antenna B



Antenna C

5270 MHz: HT/VHT40, M0 to M7

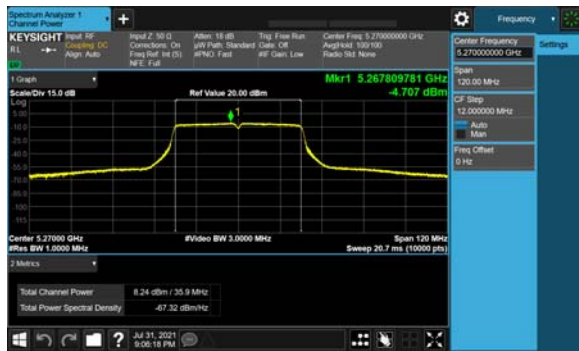

Antenna A



Antenna B

A.4: Power Spectral Density

Power Spectral Density Test Requirement

15.407:

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

15.407:

(5) The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

Referencing “644545 D03 Guidance for IEEE 802.11ac v01”

Covering signals that cross the boundary between two adjacent UNII bands, the FCC describes a procedure to measure EBW, power, and PSD in each UNII band. For the case of a 160MHz signal equally distributed between UNII-1 and UNII-2a, we apply the following alternate procedure. Rather than measure:

- The half of the signal in UNII-1, measured against the 30dBm power / 17dBm/MHz PSD limits
- The half of the signal in UNII-2a, measured against the 24dBm power / 11dBm/MHz PSD limits

If a 160MHz signal (equally distributed between the two bands) produces a total power of 27dBm across the entire 160 MHz EBW, the total power in each band would be half of the total, or 24dBm (which meets both the UNII-1 and UNII-2a limits) and would have a PSD no greater than 11dBm/MHz in either sub-band.

Given these facts, we have measured the complete 160 MHz EBW (across both sub-bands) against 27dBm power and 11dBm/MHz PSD limits, rather than individual sub band measurements against the individual sub band limits.”

Power Spectral Density Test Procedure

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v02r01

F. Maximum Power Spectral Density (PSD)

Power Spectral Density Test Procedure
The rules requires “maximum power spectral density” measurements where the intent is to measure the maximum value of the time average of the power spectral density measured during a period of continuous transmission. 1. Create an average power spectrum for the EUT operating mode being tested by following the instructions in section II.E.2. for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, “Compute power...”. (This procedure is required even if the maximum conducted output power measurement was performed using a power meter, method PM.) 2. Use the peak search function on the instrument to find the peak of the spectrum and record its value. 3. Make the following adjustments to the peak value of the spectrum, if applicable: a) If Method SA-2 or SA-2 Alternative was used, add 10 log(1/x), where x is the duty cycle, to the peak of the spectrum. b) If Method SA-3 Alternative was used and the linear mode was used in step II.E.2.g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging. 4. The result is the Maximum PSD over 1 MHz reference bandwidth.

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v02r01**2. Measurement using a Spectrum Analyzer or EMI Receiver (SA), (d) Method SA-2**

Power Spectral Density
Test parameters
Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).
(i) Measure the duty cycle, x , of the transmitter output signal as described in section II.B.
(ii) Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
(iii) Set RBW = 1 MHz.
(iv) Set VBW $\geq$ 3 MHz.
(v) Number of points in sweep $\geq$ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)
(vi) Sweep time = auto.
(vii) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode. (viii) Do not use sweep triggering. Allow the sweep to "free run".
(ix) Trace average at least 100 traces in power averaging (i.e., RMS) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.
(x) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth)
F. Maximum Power Spectral Density (PSD)
2. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
3. Make the following adjustments to the peak value of the spectrum, if applicable: a) If Method SA-2 or SA-2 Alternative was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.

The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. (See ANSI C63.10 section 14.3.2.2)

Tested By: Johanna Knudsen, Julian Land, Mathew Blackburn	Date of testing: 28-JUL-2021 to 30-JUL-2021; 01-AUG-2021 to 02-AUG-2021; 06-AUG-2021; 11-AUG-2021 to 14-AUG-2021; 18-AUG-2021 to 19-AUG-2021; 23-AUG-2021 to 24-AUG-2021; 03-SEP-2021 to 04-SEP-2021
Test Result: PASS	

Test Equipment

See Appendix C for list of test equipment

Power Spectral Density**Frequency 5260 MHz**

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 PSD (dBm/MHz)	Tx 2 PSD (dBm/MHz)	Tx 3 PSD (dBm/MHz)	Tx 4 PSD (dBm/MHz)	Duty Cycle (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	13	2.9				0.23	3.2	4	0.82
Non HT20, 6 to 54 Mbps	2	13	-4.1	1.7			0.23	2.9	4	1.07
Non HT20, 6 to 54 Mbps	3	16	-7.9	-2.9	-3.1		0.23	0.9	1	0.1
Non HT20, 6 to 54 Mbps	4	16	-11.3	-4.9	-5.0	-5.2	0.23	0.3	1	0.68
Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-4.1	1.7			0.23	2.9	4	1.07
Non HT20 Beam Forming, 6 to 54 Mbps	3	16	-7.9	-2.9	-3.1		0.23	0.9	1	0.1
Non HT20 Beam Forming, 6 to 54 Mbps	4	16	-11.3	-4.9	-5.0	-5.2	0.23	0.3	1	0.68
HT/VHT20, M0 to M7	1	13	3.4				0.22	3.6	4	0.37
HT/VHT20, M0 to M7	2	13	-4.0	1.5			0.22	2.8	4	1.19
HT/VHT20, M8 to M15	2	13	-4.0	1.5			0.22	2.8	4	1.19
HT/VHT20, M0 to M7	3	16	-8.1	-3.0	-3.4		0.22	0.7	1	0.34
HT/VHT20, M8 to M15	3	13	-6.0	-0.3	-1.3		0.22	3.0	4	0.95
HT/VHT20, M16 to M23	3	13	-6.0	-0.3	-1.3		0.22	3.0	4	0.95
HT/VHT20, M0 to M7	4	16	-9.8	-4.4	-4.4	-5.0	0.22	0.8	1	0.17
HT/VHT20, M8 to M15	4	13	-7.2	-1.3	-2.3	-2.4	0.22	3.4	4	0.58
HT/VHT20, M16 to M23	4	13	-7.2	-1.3	-2.3	-2.4	0.22	3.4	4	0.58
HT/VHT20, M24 to M31	4	13	-7.2	-1.3	-2.3	-2.4	0.22	3.4	4	0.58
HT/VHT20 Beam Forming, M0 to M7	2	13	-4.0	1.5			0.22	2.8	4	1.19
HT/VHT20 Beam Forming, M8 to M15	2	13	-4.0	1.5			0.22	2.8	4	1.19
HT/VHT20 Beam Forming, M0 to M7	3	16	-8.1	-3.0	-3.4		0.22	0.7	1	0.34
HT/VHT20 Beam Forming, M8 to M15	3	13	-6.0	-0.3	-1.3		0.22	3.0	4	0.95
HT/VHT20 Beam Forming, M16 to M23	3	13	-6.0	-0.3	-1.3		0.22	3.0	4	0.95
HT/VHT20 Beam Forming, M0 to M7	4	16	-9.8	-4.4	-4.4	-5.0	0.22	0.8	1	0.17
HT/VHT20 Beam Forming, M8 to M15	4	13	-7.2	-1.3	-2.3	-2.4	0.22	3.4	4	0.58
HT/VHT20 Beam Forming, M16 to M23	4	13	-7.2	-1.3	-2.3	-2.4	0.22	3.4	4	0.58
HT/VHT20 Beam Forming, M24 to M31	4	13	-7.2	-1.3	-2.3	-2.4	0.22	3.4	4	0.58
HT/VHT20 STBC, M0 to M7	2	13	-4.0	1.5			0.22	2.8	4	1.19
HT/VHT20 STBC, M0 to M7	3	13	-6.0	-0.3	-1.3		0.22	3.0	4	0.95
HT/VHT20 STBC, M0 to M7	4	13	-7.2	-1.3	-2.3	-2.4	0.22	3.4	4	0.58
HE20, M0 to M9 1ss	1	13	3.6				0.22	3.9	4	0.13
HE20, M0 to M9 1ss	2	13	-4.2	1.7			0.22	2.9	4	1.1
HE20, M0 to M9 2ss	2	13	-4.2	1.7			0.22	2.9	4	1.1
HE20, M0 to M9 1ss	3	16	-7.8	-2.9	-3.2		0.22	0.8	1	0.15
HE20, M0 to M9 2ss	3	13	-5.8	-0.5	-1.0		0.22	3.1	4	0.88

HE20, M0 to M9 3ss	3	13	-5.8	-0.5	-1.0		0.22	3.1	4	0.88
HE20, M0 to M9 1ss	4	16	-10.1	-4.4	-4.7	-4.7	0.22	0.8	1	0.24
HE20, M0 to M9 2ss	4	13	-7.2	-1.3	-2.1	-2.4	0.22	3.5	4	0.5
HE20, M0 to M9 3ss	4	13	-7.2	-1.3	-2.1	-2.4	0.22	3.5	4	0.5
HE20, M0 to M9 4ss	4	13	-7.2	-1.3	-2.1	-2.4	0.22	3.5	4	0.5
HE20 Beam Forming, M0 to M9 1ss	2	13	-4.2	1.7			0.22	2.9	4	1.1
HE20 Beam Forming, M0 to M9 2ss	2	13	-4.2	1.7			0.22	2.9	4	1.1
HE20 Beam Forming, M0 to M9 1ss	3	16	-7.8	-2.9	-3.2		0.22	0.8	1	0.15
HE20 Beam Forming, M0 to M9 2ss	3	13	-5.8	-0.5	-1.0		0.22	3.1	4	0.88
HE20 Beam Forming, M0 to M9 3ss	3	13	-5.8	-0.5	-1.0		0.22	3.1	4	0.88
HE20 Beam Forming, M0 to M9 1ss	4	16	-10.1	-4.4	-4.7	-4.7	0.22	0.8	1	0.24
HE20 Beam Forming, M0 to M9 2ss	4	13	-7.2	-1.3	-2.1	-2.4	0.22	3.5	4	0.5
HE20 Beam Forming, M0 to M9 3ss	4	13	-7.2	-1.3	-2.1	-2.4	0.22	3.5	4	0.5
HE20 Beam Forming, M0 to M9 4ss	4	13	-7.2	-1.3	-2.1	-2.4	0.22	3.5	4	0.5
HE20 STBC, M0 to M9 2ss	2	13	-4.2	1.7			0.22	2.9	4	1.1
HE20 STBC, M0 to M9 2ss	3	13	-5.8	-0.5	-1.0		0.22	3.1	4	0.88
HE20 STBC, M0 to M9 2ss	4	13	-7.2	-1.3	-2.1	-2.4	0.22	3.5	4	0.5

Frequency 5270 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 PSD (dBm/MHz)	Tx 2 PSD (dBm/MHz)	Tx 3 PSD (dBm/MHz)	Tx 4 PSD (dBm/MHz)	Duty Cycle (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)
Non HT40, 6 to 54 Mbps	1	13	3.4				0.34	3.8	4	0.24
Non HT40, 6 to 54 Mbps	2	13	-5.0	2.2			0.34	3.3	4	0.69
Non HT40, 6 to 54 Mbps	3	16	-8.5	-3.1	-3.7		0.34	0.6	1	0.42
Non HT40, 6 to 54 Mbps	4	16	-10.0	-4.0	-4.9	-5.1	0.34	0.9	1	0.11
HT/VHT40, M0 to M7	1	13	3.3				0.32	3.6	4	0.42
HT/VHT40, M0 to M7	2	13	-4.7	2.1			0.32	3.3	4	0.73
HT/VHT40, M8 to M15	2	13	-4.7	2.1			0.32	3.3	4	0.73
HT/VHT40, M0 to M7	3	16	-8.8	-3.4	-4.2		0.32	0.2	1	0.84
HT/VHT40, M8 to M15	3	13	-7.1	-1.6	-1.5		0.32	2.3	4	1.68
HT/VHT40, M16 to M23	3	13	-7.1	-1.6	-1.5		0.32	2.3	4	1.68
HT/VHT40, M0 to M7	4	16	-10.2	-4.5	-4.9	-5.4	0.32	0.6	1	0.44
HT/VHT40, M8 to M15	4	13	-8.0	-2.5	-2.7	-3.1	0.32	2.7	4	1.25
HT/VHT40, M16 to M23	4	13	-8.0	-2.5	-2.7	-3.1	0.32	2.7	4	1.25
HT/VHT40, M24 to M31	4	13	-8.0	-2.5	-2.7	-3.1	0.32	2.7	4	1.25
HT/VHT40 Beam Forming, M0 to M7	2	13	-4.7	2.1			0.32	3.3	4	0.73
HT/VHT40 Beam Forming, M8 to M15	2	13	-4.7	2.1			0.32	3.3	4	0.73
HT/VHT40 Beam Forming, M0 to M7	3	16	-8.8	-3.4	-4.2		0.32	0.2	1	0.84
HT/VHT40 Beam Forming, M8 to M15	3	13	-7.1	-1.6	-1.5		0.32	2.3	4	1.68
HT/VHT40 Beam Forming, M16 to M23	3	13	-7.1	-1.6	-1.5		0.32	2.3	4	1.68
HT/VHT40 Beam Forming, M0 to M7	4	16	-12.4	-4.9	-5.2	-5.3	0.32	0.2	1	0.78
HT/VHT40 Beam Forming, M8 to M15	4	13	-8.0	-2.5	-2.7	-3.1	0.32	2.7	4	1.25

HT/VHT40 Beam Forming, M16 to M23	4	13	-8.0	-2.5	-2.7	-3.1	0.32	2.7	4	1.25
HT/VHT40 Beam Forming, M24 to M31	4	13	-8.0	-2.5	-2.7	-3.1	0.32	2.7	4	1.25
HT/VHT40 STBC, M0 to M7	2	13	-4.7	2.1			0.32	3.3	4	0.73
HT/VHT40 STBC, M0 to M7	3	13	-7.1	-1.6	-1.5		0.32	2.3	4	1.68
HT/VHT40 STBC, M0 to M7	4	13	-8.0	-2.5	-2.7	-3.1	0.32	2.7	4	1.25
HE40, M0 to M9 1ss	1	13	2.4				0.29	2.7	4	1.33
HE40, M0 to M9 1ss	2	13	-6.0	1.4			0.29	2.4	4	1.6
HE40, M0 to M9 2ss	2	13	-6.0	1.4			0.29	2.4	4	1.6
HE40, M0 to M9 1ss	3	16	-8.8	-3.2	-3.6		0.29	0.5	1	0.5
HE40, M0 to M9 2ss	3	13	-6.9	-1.3	-1.3		0.29	2.6	4	1.42
HE40, M0 to M9 3ss	3	13	-6.9	-1.3	-1.3		0.29	2.6	4	1.42
HE40, M0 to M9 1ss	4	16	-10.0	-4.0	-4.9	-4.8	0.29	0.9	1	0.09
HE40, M0 to M9 2ss	4	13	-7.7	-2.1	-2.6	-3.0	0.29	2.9	4	1.06
HE40, M0 to M9 3ss	4	13	-7.7	-2.1	-2.6	-3.0	0.29	2.9	4	1.06
HE40, M0 to M9 4ss	4	13	-7.7	-2.1	-2.6	-3.0	0.29	2.9	4	1.06
HE40 Beam Forming, M0 to M9 1ss	2	13	-6.0	1.4			0.29	2.4	4	1.6
HE40 Beam Forming, M0 to M9 2ss	2	13	-6.0	1.4			0.29	2.4	4	1.6
HE40 Beam Forming, M0 to M9 1ss	3	16	-10.0	-4.0	-4.9		0.29	-0.6	1	1.58
HE40 Beam Forming, M0 to M9 2ss	3	13	-6.9	-1.3	-1.3		0.29	2.6	4	1.42
HE40 Beam Forming, M0 to M9 3ss	3	13	-6.9	-1.3	-1.3		0.29	2.6	4	1.42
HE40 Beam Forming, M0 to M9 1ss	4	16	-10.7	-5.7	-6.0	-5.8	0.29	-0.3	1	1.34
HE40 Beam Forming, M0 to M9 2ss	4	13	-7.7	-2.1	-2.6	-3.0	0.29	2.9	4	1.06
HE40 Beam Forming, M0 to M9 3ss	4	13	-7.7	-2.1	-2.6	-3.0	0.29	2.9	4	1.06
HE40 Beam Forming, M0 to M9 4ss	4	13	-7.7	-2.1	-2.6	-3.0	0.29	2.9	4	1.06
HE40 STBC, M0 to M9 2ss	2	13	-6.0	1.4			0.29	2.4	4	1.6
HE40 STBC, M0 to M9 2ss	3	13	-6.9	-1.3	-1.3		0.29	2.6	4	1.42
HE40 STBC, M0 to M9 2ss	4	13	-7.7	-2.1	-2.6	-3.0	0.29	2.9	4	1.06

Frequency 5280 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 PSD (dBm/MHz)	Tx 2 PSD (dBm/MHz)	Tx 3 PSD (dBm/MHz)	Tx 4 PSD (dBm/MHz)	Duty Cycle (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	13	3.5				0.23	3.7	4	0.29
Non HT20, 6 to 54 Mbps	2	13	-3.9	1.5			0.23	2.8	4	1.18
Non HT20, 6 to 54 Mbps	3	16	-8.4	-3.9	-3.7		0.23	0.2	1	0.85
Non HT20, 6 to 54 Mbps	4	16	-10.7	-4.9	-5.4	-6.0	0.23	-0.0	1	1.0
Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-3.9	1.5			0.23	2.8	4	1.18
Non HT20 Beam Forming, 6 to 54 Mbps	3	16	-8.4	-3.9	-3.7		0.23	0.2	1	0.85
Non HT20 Beam Forming, 6 to 54 Mbps	4	16	-10.7	-4.9	-5.4	-6.0	0.23	-0.0	1	1.0
HT/VHT20, M0 to M7	1	13	3.0				0.22	3.2	4	0.77
HT/VHT20, M0 to M7	2	13	-4.5	1.2			0.22	2.4	4	1.56
HT/VHT20, M8 to M15	2	13	-4.5	1.2			0.22	2.4	4	1.56
HT/VHT20, M0 to M7	3	16	-8.2	-3.1	-3.3		0.22	0.7	1	0.34
HT/VHT20, M8 to M15	3	13	-5.5	0.5	-0.1		0.22	4.0	4	0.03
HT/VHT20, M16 to M23	3	13	-5.5	0.5	-0.1		0.22	4.0	4	0.03
HT/VHT20, M0 to M7	4	16	-10.1	-4.1	-4.6	-5.1	0.22	0.8	1	0.19
HT/VHT20, M8 to M15	4	13	-7.4	-1.4	-2.4	-2.4	0.22	3.4	4	0.61
HT/VHT20, M16 to M23	4	13	-7.4	-1.4	-2.4	-2.4	0.22	3.4	4	0.61
HT/VHT20, M24 to M31	4	13	-7.4	-1.4	-2.4	-2.4	0.22	3.4	4	0.61
HT/VHT20 Beam Forming, M0 to M7	2	13	-4.5	1.2			0.22	2.4	4	1.56
HT/VHT20 Beam Forming, M8 to M15	2	13	-4.5	1.2			0.22	2.4	4	1.56
HT/VHT20 Beam Forming, M0 to M7	3	16	-8.2	-3.1	-3.3		0.22	0.7	1	0.34
HT/VHT20 Beam Forming, M8 to M15	3	13	-5.5	0.5	-0.1		0.22	4.0	4	0.03
HT/VHT20 Beam Forming, M16 to M23	3	13	-5.5	0.5	-0.1		0.22	4.0	4	0.03
HT/VHT20 Beam Forming, M0 to M7	4	16	-10.1	-4.1	-4.6	-5.1	0.22	0.8	1	0.19
HT/VHT20 Beam Forming, M8 to M15	4	13	-7.4	-1.4	-2.4	-2.4	0.22	3.4	4	0.61
HT/VHT20 Beam Forming, M16 to M23	4	13	-7.4	-1.4	-2.4	-2.4	0.22	3.4	4	0.61
HT/VHT20 Beam Forming, M24 to M31	4	13	-7.4	-1.4	-2.4	-2.4	0.22	3.4	4	0.61
HT/VHT20 STBC, M0 to M7	2	13	-4.5	1.2			0.22	2.4	4	1.56
HT/VHT20 STBC, M0 to M7	3	13	-5.5	0.5	-0.1		0.22	4.0	4	0.03
HT/VHT20 STBC, M0 to M7	4	13	-7.4	-1.4	-2.4	-2.4	0.22	3.4	4	0.61
HE20, M0 to M9 1ss	1	13	3.0				0.22	3.3	4	0.73
HE20, M0 to M9 1ss	2	13	-4.3	1.5			0.22	2.8	4	1.25
HE20, M0 to M9 2ss	2	13	-4.3	1.5			0.22	2.8	4	1.25
HE20, M0 to M9 1ss	3	16	-7.8	-2.9	-3.1		0.22	0.9	1	0.1
HE20, M0 to M9 2ss	3	13	-6.3	-0.3	-0.7		0.22	3.2	4	0.77
HE20, M0 to M9 3ss	3	13	-6.3	-0.3	-0.7		0.22	3.2	4	0.77
HE20, M0 to M9 1ss	4	16	-10.3	-4.5	-5.1	-5.4	0.22	0.4	1	0.59

HE20, M0 to M9 2ss	4	13	-7.1	-1.3	-2.2	-2.4	0.22	3.4	4	0.55
HE20, M0 to M9 3ss	4	13	-7.1	-1.3	-2.2	-2.4	0.22	3.4	4	0.55
HE20, M0 to M9 4ss	4	13	-7.1	-1.3	-2.2	-2.4	0.22	3.4	4	0.55
HE20 Beam Forming, M0 to M9 1ss	2	13	-4.3	1.5			0.22	2.8	4	1.25
HE20 Beam Forming, M0 to M9 2ss	2	13	-4.3	1.5			0.22	2.8	4	1.25
HE20 Beam Forming, M0 to M9 1ss	3	16	-7.8	-2.9	-3.1		0.22	0.9	1	0.1
HE20 Beam Forming, M0 to M9 2ss	3	13	-6.3	-0.3	-0.7		0.22	3.2	4	0.77
HE20 Beam Forming, M0 to M9 3ss	3	13	-6.3	-0.3	-0.7		0.22	3.2	4	0.77
HE20 Beam Forming, M0 to M9 1ss	4	16	-10.3	-4.5	-5.1	-5.4	0.22	0.4	1	0.59
HE20 Beam Forming, M0 to M9 2ss	4	13	-7.1	-1.3	-2.2	-2.4	0.22	3.4	4	0.55
HE20 Beam Forming, M0 to M9 3ss	4	13	-7.1	-1.3	-2.2	-2.4	0.22	3.4	4	0.55
HE20 Beam Forming, M0 to M9 4ss	4	13	-7.1	-1.3	-2.2	-2.4	0.22	3.4	4	0.55
HE20 STBC, M0 to M9 2ss	2	13	-4.3	1.5			0.22	2.8	4	1.25
HE20 STBC, M0 to M9 2ss	3	13	-6.3	-0.3	-0.7		0.22	3.2	4	0.77
HE20 STBC, M0 to M9 2ss	4	13	-7.1	-1.3	-2.2	-2.4	0.22	3.4	4	0.55

Frequency 5290 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 PSD (dBm/MHz)	Tx 2 PSD (dBm/MHz)	Tx 3 PSD (dBm/MHz)	Tx 4 PSD (dBm/MHz)	Duty Cycle (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)
Non HT80, 6 to 54 Mbps	1	13	-8.3				0.28	-8.0	4	12.02
Non HT80, 6 to 54 Mbps	2	13	-11.2	-4.8			0.28	-3.6	4	7.62
Non HT80, 6 to 54 Mbps	3	16	-11.9	-6.0	-6.6		0.28	-2.5	1	3.45
Non HT80, 6 to 54 Mbps	4	16	-11.9	-6.0	-6.6	-6.4	0.28	-0.9	1	1.9
VHT80, M0 to M9 1ss	1	13	-6.1				0.35	-5.8	4	9.78
VHT80, M0 to M9 1ss	2	13	-11.9	-5.4			0.33	-4.2	4	8.19
VHT80, M0 to M9 2ss	2	13	-11.9	-5.4			0.33	-4.2	4	8.19
VHT80, M0 to M9 1ss	3	16	-12.9	-6.5	-7.2		0.33	-3.0	1	3.98
VHT80, M0 to M9 2ss	3	13	-12.9	-6.5	-7.2		0.33	-3.0	4	6.98
VHT80, M0 to M9 3ss	3	13	-12.9	-6.5	-7.2		0.33	-3.0	4	6.98
VHT80, M0 to M9 1ss	4	16	-13.7	-7.3	-8.2	-8.1	0.33	-2.4	1	3.39
VHT80, M0 to M9 2ss	4	13	-13.7	-7.3	-8.2	-8.1	0.33	-2.4	4	6.39
VHT80, M0 to M9 3ss	4	13	-13.7	-7.3	-8.2	-8.1	0.33	-2.4	4	6.39
VHT80, M0 to M9 4ss	4	13	-13.7	-7.3	-8.2	-8.1	0.33	-2.4	4	6.39
VHT80 Beam Forming, M0 to M9 1ss	2	13	-11.9	-5.4			0.33	-4.2	4	8.19
VHT80 Beam Forming, M0 to M9 2ss	2	13	-11.9	-5.4			0.33	-4.2	4	8.19
VHT80 Beam Forming, M0 to M9 1ss	3	16	-14.3	-9.7	-9.7		0.33	-5.7	1	6.66
VHT80 Beam Forming, M0 to M9 2ss	3	13	-12.9	-6.5	-7.2		0.33	-3.0	4	6.98
VHT80 Beam Forming, M0 to M9 3ss	3	13	-12.9	-6.5	-7.2		0.33	-3.0	4	6.98
VHT80 Beam Forming, M0 to M9 1ss	4	16	-15.3	-10.7	-10.5	-10.6	0.33	-5.0	1	6.02
VHT80 Beam Forming, M0 to M9 2ss	4	13	-13.7	-7.3	-8.2	-8.1	0.33	-2.4	4	6.39
VHT80 Beam Forming, M0 to M9 3ss	4	13	-13.7	-7.3	-8.2	-8.1	0.33	-2.4	4	6.39

VHT80 Beam Forming, M0 to M9 4ss	4	13	-13.7	-7.3	-8.2	-8.1	0.33	-2.4	4	6.39
VHT80 STBC, M0 to M9 1ss	2	13	-11.9	-5.4			0.33	-4.2	4	8.19
VHT80 STBC, M0 to M9 1ss	3	13	-12.9	-6.5	-7.2		0.33	-3.0	4	6.98
VHT80 STBC, M0 to M9 1ss	4	13	-13.7	-7.3	-8.2	-8.1	0.33	-2.4	4	6.39
HE80, M0 to M9 1ss	1	13	-3.9				0.23	-3.7	4	7.69
HE80, M0 to M9 1ss	2	13	-12.2	-6.1			0.23	-4.9	4	8.89
HE80, M0 to M9 2ss	2	13	-12.2	-6.1			0.23	-4.9	4	8.89
HE80, M0 to M9 1ss	3	16	-13.0	-6.8	-7.7		0.23	-3.5	1	4.46
HE80, M0 to M9 2ss	3	13	-13.0	-6.8	-7.7		0.23	-3.5	4	7.46
HE80, M0 to M9 3ss	3	13	-13.0	-6.8	-7.7		0.23	-3.5	4	7.46
HE80, M0 to M9 1ss	4	16	-14.3	-6.8	-6.9	-6.9	0.23	-1.6	1	2.63
HE80, M0 to M9 2ss	4	13	-14.3	-6.8	-6.9	-6.9	0.23	-1.6	4	5.63
HE80, M0 to M9 3ss	4	13	-14.3	-6.8	-6.9	-6.9	0.23	-1.6	4	5.63
HE80, M0 to M9 4ss	4	13	-14.3	-6.8	-6.9	-6.9	0.23	-1.6	4	5.63
HE80 Beam Forming, M0 to M9 1ss	2	13	-12.2	-6.1			0.23	-4.9	4	8.89
HE80 Beam Forming, M0 to M9 2ss	2	13	-12.2	-6.1			0.23	-4.9	4	8.89
HE80 Beam Forming, M0 to M9 1ss	3	16	-14.7	-9.9	-9.9		0.23	-6.0	1	6.99
HE80 Beam Forming, M0 to M9 2ss	3	13	-13.0	-6.8	-7.7		0.23	-3.5	4	7.46
HE80 Beam Forming, M0 to M9 3ss	3	13	-13.0	-6.8	-7.7		0.23	-3.5	4	7.46
HE80 Beam Forming, M0 to M9 1ss	4	16	-14.7	-9.9	-9.9	-10.3	0.23	-4.6	1	5.55
HE80 Beam Forming, M0 to M9 2ss	4	13	-14.3	-6.8	-6.9	-6.9	0.23	-1.6	4	5.63
HE80 Beam Forming, M0 to M9 3ss	4	13	-14.3	-6.8	-6.9	-6.9	0.23	-1.6	4	5.63
HE80 Beam Forming, M0 to M9 4ss	4	13	-14.3	-6.8	-6.9	-6.9	0.23	-1.6	4	5.63
HE80 STBC, M0 to M9 1ss	2	13	-12.2	-6.1			0.23	-4.9	4	8.89
HE80 STBC, M0 to M9 1ss	3	13	-13.0	-6.8	-7.7		0.23	-3.5	4	7.46
HE80 STBC, M0 to M9 1ss	4	13	-14.3	-6.8	-6.9	-6.9	0.23	-1.6	4	5.63

Frequency 5300 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 PSD (dBm/MHz)	Tx 2 PSD (dBm/MHz)	Tx 3 PSD (dBm/MHz)	Tx 4 PSD (dBm/MHz)	Duty Cycle (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	13	3.7				0.23	4.0	4	0.03
Non HT20, 6 to 54 Mbps	2	13	-4.6	1.9			0.23	3.0	4	1.0
Non HT20, 6 to 54 Mbps	3	16	-8.8	-4.1	-3.5		0.23	0.1	1	0.92
Non HT20, 6 to 54 Mbps	4	16	-10.3	-4.9	-5.3	-6.0	0.23	0.1	1	0.93
Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-4.6	1.9			0.23	3.0	4	1.0
Non HT20 Beam Forming, 6 to 54 Mbps	3	16	-8.8	-4.1	-3.5		0.23	0.1	1	0.92
Non HT20 Beam Forming, 6 to 54 Mbps	4	16	-10.3	-4.9	-5.3	-6.0	0.23	0.1	1	0.93
HT/VHT20, M0 to M7	1	13	3.4				0.22	3.6	4	0.37
HT/VHT20, M0 to M7	2	13	-5.1	1.5			0.22	2.6	4	1.43
HT/VHT20, M8 to M15	2	13	-5.1	1.5			0.22	2.6	4	1.43
HT/VHT20, M0 to M7	3	16	-7.5	-3.3	-3.3		0.22	0.7	1	0.31
HT/VHT20, M8 to M15	3	13	-6.1	0.4			0.22	3.9	4	0.07
HT/VHT20, M16 to M23	3	13	-6.1	0.4			0.22	3.9	4	0.07
HT/VHT20, M0 to M7	4	16	-9.8	-4.5	-4.7	-5.0	0.22	0.7	1	0.3
HT/VHT20, M8 to M15	4	13	-7.8	-1.6	-2.4	-2.2	0.22	3.3	4	0.72
HT/VHT20, M16 to M23	4	13	-7.8	-1.6	-2.4	-2.2	0.22	3.3	4	0.72
HT/VHT20, M24 to M31	4	13	-7.8	-1.6	-2.4	-2.2	0.22	3.3	4	0.72
HT/VHT20 Beam Forming, M0 to M7	2	13	-5.1	1.5			0.22	2.6	4	1.43
HT/VHT20 Beam Forming, M8 to M15	2	13	-5.1	1.5			0.22	2.6	4	1.43
HT/VHT20 Beam Forming, M0 to M7	3	16	-7.5	-3.3	-3.3		0.22	0.7	1	0.31
HT/VHT20 Beam Forming, M8 to M15	3	13	-6.1	0.4			0.22	3.9	4	0.07
HT/VHT20 Beam Forming, M16 to M23	3	13	-6.1	0.4			0.22	3.9	4	0.07
HT/VHT20 Beam Forming, M0 to M7	4	16	-9.8	-4.5	-4.7	-5.0	0.22	0.7	1	0.3
HT/VHT20 Beam Forming, M8 to M15	4	13	-7.8	-1.6	-2.4	-2.2	0.22	3.3	4	0.72
HT/VHT20 Beam Forming, M16 to M23	4	13	-7.8	-1.6	-2.4	-2.2	0.22	3.3	4	0.72
HT/VHT20 Beam Forming, M24 to M31	4	13	-7.8	-1.6	-2.4	-2.2	0.22	3.3	4	0.72
HT/VHT20 STBC, M0 to M7	2	13	-5.1	1.5			0.22	2.6	4	1.43
HT/VHT20 STBC, M0 to M7	3	13	-6.1	0.4			0.22	3.9	4	0.07
HT/VHT20 STBC, M0 to M7	4	13	-7.8	-1.6	-2.4	-2.2	0.22	3.3	4	0.72
HE20, M0 to M9 1ss	1	13	3.5				0.22	3.7	4	0.32
HE20, M0 to M9 1ss	2	13	-4.9	1.6			0.22	2.7	4	1.29
HE20, M0 to M9 2ss	2	13	-4.9	1.6			0.22	2.7	4	1.29
HE20, M0 to M9 1ss	3	16	-7.4	-3.2	-3.1		0.22	0.9	1	0.14
HE20, M0 to M9 2ss	3	13	-6.8	-0.4	-1.1		0.22	3.0	4	0.99
HE20, M0 to M9 3ss	3	13	-6.8	-0.4	-1.1		0.22	3.0	4	0.99
HE20, M0 to M9 1ss	4	16	-9.9	-4.6	-4.7	-5.1	0.22	0.6	1	0.4

HE20, M0 to M9 2ss	4	13	-7.7	-1.4	-2.0	-2.1	0.22	3.5	4	0.47
HE20, M0 to M9 3ss	4	13	-7.7	-1.4	-2.0	-2.1	0.22	3.5	4	0.47
HE20, M0 to M9 4ss	4	13	-7.7	-1.4	-2.0	-2.1	0.22	3.5	4	0.47
HE20 Beam Forming, M0 to M9 1ss	2	13	-4.9	1.6			0.22	2.7	4	1.29
HE20 Beam Forming, M0 to M9 2ss	2	13	-4.9	1.6			0.22	2.7	4	1.29
HE20 Beam Forming, M0 to M9 1ss	3	16	-7.4	-3.2	-3.1		0.22	0.9	1	0.14
HE20 Beam Forming, M0 to M9 2ss	3	13	-6.8	-0.4	-1.1		0.22	3.0	4	0.99
HE20 Beam Forming, M0 to M9 3ss	3	13	-6.8	-0.4	-1.1		0.22	3.0	4	0.99
HE20 Beam Forming, M0 to M9 1ss	4	16	-9.9	-4.6	-4.7	-5.1	0.22	0.6	1	0.4
HE20 Beam Forming, M0 to M9 2ss	4	13	-7.7	-1.4	-2.0	-2.1	0.22	3.5	4	0.47
HE20 Beam Forming, M0 to M9 3ss	4	13	-7.7	-1.4	-2.0	-2.1	0.22	3.5	4	0.47
HE20 Beam Forming, M0 to M9 4ss	4	13	-7.7	-1.4	-2.0	-2.1	0.22	3.5	4	0.47
HE20 STBC, M0 to M9 2ss	2	13	-4.9	1.6			0.22	2.7	4	1.29
HE20 STBC, M0 to M9 2ss	3	13	-6.8	-0.4	-1.1		0.22	3.0	4	0.99
HE20 STBC, M0 to M9 2ss	4	13	-7.7	-1.4	-2.0	-2.1	0.22	3.5	4	0.47

Frequency 5310 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 PSD (dBm/MHz)	Tx 2 PSD (dBm/MHz)	Tx 3 PSD (dBm/MHz)	Tx 4 PSD (dBm/MHz)	Duty Cycle (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)
Non HT40, 6 to 54 Mbps	1	13	-3.4				0.34	-3.1	4	7.08
Non HT40, 6 to 54 Mbps	2	13	-8.1	-2.6			0.34	-1.2	4	5.21
Non HT40, 6 to 54 Mbps	3	16	-9.1	-3.4	-3.8		0.34	0.3	1	0.69
Non HT40, 6 to 54 Mbps	4	16	-11.9	-5.1	-4.9	-5.1	0.34	0.4	1	0.62
HT/VHT40, M0 to M7	1	13	-0.8				0.32	-0.5	4	4.47
HT/VHT40, M0 to M7	2	13	-7.1	-1.4			0.32	-0.1	4	4.07
HT/VHT40, M8 to M15	2	13	-7.1	-1.4			0.32	-0.1	4	4.07
HT/VHT40, M0 to M7	3	16	-8.7	-3.7	-4.2		0.32	0.1	1	0.93
HT/VHT40, M8 to M15	3	13	-8.3	-2.6	-2.6		0.32	1.3	4	2.71
HT/VHT40, M16 to M23	3	13	-8.3	-2.6	-2.6		0.32	1.3	4	2.71
HT/VHT40, M0 to M7	4	16	-10.3	-4.6	-5.2	-4.8	0.32	0.6	1	0.37
HT/VHT40, M8 to M15	4	13	-10.3	-4.6	-5.2	-4.8	0.32	0.6	4	3.37
HT/VHT40, M16 to M23	4	13	-10.3	-4.6	-5.2	-4.8	0.32	0.6	4	3.37
HT/VHT40, M24 to M31	4	13	-10.3	-4.6	-5.2	-4.8	0.32	0.6	4	3.37
HT/VHT40 Beam Forming, M0 to M7	2	13	-7.1	-1.4			0.32	-0.1	4	4.07
HT/VHT40 Beam Forming, M8 to M15	2	13	-7.1	-1.4			0.32	-0.1	4	4.07
HT/VHT40 Beam Forming, M0 to M7	3	16	-10.3	-4.6	-5.2		0.32	-1.0	1	1.96
HT/VHT40 Beam Forming, M8 to M15	3	13	-8.3	-2.6	-2.6		0.32	1.3	4	2.71
HT/VHT40 Beam Forming, M16 to M23	3	13	-8.3	-2.6	-2.6		0.32	1.3	4	2.71
HT/VHT40 Beam Forming, M0 to M7	4	16	-10.7	-5.9	-6.1	-6.5	0.32	-0.6	1	1.59
HT/VHT40 Beam Forming, M8 to M15	4	13	-10.3	-4.6	-5.2	-4.8	0.32	0.6	4	3.37
HT/VHT40 Beam Forming, M16 to M23	4	13	-10.3	-4.6	-5.2	-4.8	0.32	0.6	4	3.37

HT/VHT40 Beam Forming, M24 to M31	4	13	-10.3	-4.6	-5.2	-4.8	0.32	0.6	4	3.37
HT/VHT40 STBC, M0 to M7	2	13	-7.1	-1.4			0.32	-0.1	4	4.07
HT/VHT40 STBC, M0 to M7	3	13	-8.3	-2.6	-2.6		0.32	1.3	4	2.71
HT/VHT40 STBC, M0 to M7	4	13	-10.3	-4.6	-5.2	-4.8	0.32	0.6	4	3.37
HE40, M0 to M9 1ss	1	13	-0.6				0.29	-0.3	4	4.33
HE40, M0 to M9 1ss	2	13	-7.9	-2.3			0.29	-1.0	4	4.98
HE40, M0 to M9 2ss	2	13	-7.9	-2.3			0.29	-1.0	4	4.98
HE40, M0 to M9 1ss	3	16	-9.0	-3.2	-3.8		0.29	0.4	1	0.64
HE40, M0 to M9 2ss	3	13	-9.0	-3.2	-3.8		0.29	0.4	4	3.64
HE40, M0 to M9 3ss	3	13	-9.0	-3.2	-3.8		0.29	0.4	4	3.64
HE40, M0 to M9 1ss	4	16	-10.0	-4.3	-4.8	-4.6	0.29	0.9	1	0.11
HE40, M0 to M9 2ss	4	13	-10.0	-4.3	-4.8	-4.6	0.29	0.9	4	3.11
HE40, M0 to M9 3ss	4	13	-10.0	-4.3	-4.8	-4.6	0.29	0.9	4	3.11
HE40, M0 to M9 4ss	4	13	-10.0	-4.3	-4.8	-4.6	0.29	0.9	4	3.11
HE40 Beam Forming, M0 to M9 1ss	2	13	-7.9	-2.3			0.29	-1.0	4	4.98
HE40 Beam Forming, M0 to M9 2ss	2	13	-7.9	-2.3			0.29	-1.0	4	4.98
HE40 Beam Forming, M0 to M9 1ss	3	16	-10.3	-6.0	-5.9		0.29	-1.9	1	2.93
HE40 Beam Forming, M0 to M9 2ss	3	13	-9.0	-3.2	-3.8		0.29	0.4	4	3.64
HE40 Beam Forming, M0 to M9 3ss	3	13	-9.0	-3.2	-3.8		0.29	0.4	4	3.64
HE40 Beam Forming, M0 to M9 1ss	4	16	-11.8	-7.3	-6.9	-6.8	0.29	-1.5	1	2.48
HE40 Beam Forming, M0 to M9 2ss	4	13	-10.0	-4.3	-4.8	-4.6	0.29	0.9	4	3.11
HE40 Beam Forming, M0 to M9 3ss	4	13	-10.0	-4.3	-4.8	-4.6	0.29	0.9	4	3.11
HE40 Beam Forming, M0 to M9 4ss	4	13	-10.0	-4.3	-4.8	-4.6	0.29	0.9	4	3.11
HE40 STBC, M0 to M9 2ss	2	13	-7.9	-2.3			0.29	-1.0	4	4.98
HE40 STBC, M0 to M9 2ss	3	13	-9.0	-3.2	-3.8		0.29	0.4	4	3.64
HE40 STBC, M0 to M9 2ss	4	13	-10.0	-4.3	-4.8	-4.6	0.29	0.9	4	3.11


Frequency 5320 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 PSD (dBm/MHz)	Tx 2 PSD (dBm/MHz)	Tx 3 PSD (dBm/MHz)	Tx 4 PSD (dBm/MHz)	Duty Cycle (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	13	3.6				0.23	3.9	4	0.13
Non HT20, 6 to 54 Mbps	2	13	-4.0	1.8			0.23	3.1	4	0.94
Non HT20, 6 to 54 Mbps	3	16	-8.8	-4.3	-3.8		0.23	-0.1	1	1.12
Non HT20, 6 to 54 Mbps	4	16	-10.2	-5.0	-6.0	-6.0	0.23	-0.2	1	1.17
Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-4.0	1.8			0.23	3.1	4	0.94
Non HT20 Beam Forming, 6 to 54 Mbps	3	16	-8.8	-4.3	-3.8		0.23	-0.1	1	1.12
Non HT20 Beam Forming, 6 to 54 Mbps	4	16	-10.2	-5.0	-6.0	-6.0	0.23	-0.2	1	1.17
HT/VHT20, M0 to M7	1	13	3.6				0.22	3.8	4	0.18
HT/VHT20, M0 to M7	2	13	-4.6	1.4			0.22	2.6	4	1.42
HT/VHT20, M8 to M15	2	13	-4.6	1.4			0.22	2.6	4	1.42
HT/VHT20, M0 to M7	3	16	-8.1	-3.5	-3.1		0.22	0.6	1	0.4
HT/VHT20, M8 to M15	3	13	-6.3	-0.4	-1.1		0.22	3.0	4	0.97
HT/VHT20, M16 to M23	3	13	-6.3	-0.4	-1.1		0.22	3.0	4	0.97
HT/VHT20, M0 to M7	4	16	-9.9	-4.5	-4.8	-4.9	0.22	0.7	1	0.3
HT/VHT20, M8 to M15	4	13	-7.2	-1.2	-2.1	-2.3	0.22	3.6	4	0.43
HT/VHT20, M16 to M23	4	13	-7.2	-1.2	-2.1	-2.3	0.22	3.6	4	0.43
HT/VHT20, M24 to M31	4	13	-7.2	-1.2	-2.1	-2.3	0.22	3.6	4	0.43
HT/VHT20 Beam Forming, M0 to M7	2	13	-4.6	1.4			0.22	2.6	4	1.42
HT/VHT20 Beam Forming, M8 to M15	2	13	-4.6	1.4			0.22	2.6	4	1.42
HT/VHT20 Beam Forming, M0 to M7	3	16	-8.1	-3.5	-3.1		0.22	0.6	1	0.4
HT/VHT20 Beam Forming, M8 to M15	3	13	-6.3	-0.4	-1.1		0.22	3.0	4	0.97
HT/VHT20 Beam Forming, M16 to M23	3	13	-6.3	-0.4	-1.1		0.22	3.0	4	0.97
HT/VHT20 Beam Forming, M0 to M7	4	16	-9.9	-4.5	-4.8	-4.9	0.22	0.7	1	0.3
HT/VHT20 Beam Forming, M8 to M15	4	13	-7.2	-1.2	-2.1	-2.3	0.22	3.6	4	0.43
HT/VHT20 Beam Forming, M16 to M23	4	13	-7.2	-1.2	-2.1	-2.3	0.22	3.6	4	0.43
HT/VHT20 Beam Forming, M24 to M31	4	13	-7.2	-1.2	-2.1	-2.3	0.22	3.6	4	0.43
HT/VHT20 STBC, M0 to M7	2	13	-4.6	1.4			0.22	2.6	4	1.42
HT/VHT20 STBC, M0 to M7	3	13	-6.3	-0.4	-1.1		0.22	3.0	4	0.97
HT/VHT20 STBC, M0 to M7	4	13	-7.2	-1.2	-2.1	-2.3	0.22	3.6	4	0.43
HE20, M0 to M9 1ss	1	13	2.5				0.22	2.7	4	1.3
HE20, M0 to M9 1ss	2	13	-4.4	1.8			0.22	2.9	4	1.07
HE20, M0 to M9 2ss	2	13	-4.4	1.8			0.22	2.9	4	1.07
HE20, M0 to M9 1ss	3	16	-7.9	-3.3	-3.3		0.22	0.7	1	0.35
HE20, M0 to M9 2ss	3	13	-6.3		-0.7		0.22	3.4	4	0.58
HE20, M0 to M9 3ss	3	13	-6.3		-0.7		0.22	3.4	4	0.58
HE20, M0 to M9 1ss	4	16	-10.0	-4.8	-5.0	-5.2	0.22	0.4	1	0.58


HE20, M0 to M9 2ss	4	13	-6.8	-1.1	-1.6	-2.3	0.22	3.8	4	0.23
HE20, M0 to M9 3ss	4	13	-6.8	-1.1	-1.6	-2.3	0.22	3.8	4	0.23
HE20, M0 to M9 4ss	4	13	-6.8	-1.1	-1.6	-2.3	0.22	3.8	4	0.23
HE20 Beam Forming, M0 to M9 1ss	2	13	-4.4	1.8			0.22	2.9	4	1.07
HE20 Beam Forming, M0 to M9 2ss	2	13	-4.4	1.8			0.22	2.9	4	1.07
HE20 Beam Forming, M0 to M9 1ss	3	16	-7.9	-3.3	-3.3		0.22	0.7	1	0.35
HE20 Beam Forming, M0 to M9 2ss	3	13	-6.3		-0.7		0.22	3.4	4	0.58
HE20 Beam Forming, M0 to M9 3ss	3	13	-6.3		-0.7		0.22	3.4	4	0.58
HE20 Beam Forming, M0 to M9 1ss	4	16	-10.0	-4.8	-5.0	-5.2	0.22	0.4	1	0.58
HE20 Beam Forming, M0 to M9 2ss	4	13	-6.8	-1.1	-1.6	-2.3	0.22	3.8	4	0.23
HE20 Beam Forming, M0 to M9 3ss	4	13	-6.8	-1.1	-1.6	-2.3	0.22	3.8	4	0.23
HE20 Beam Forming, M0 to M9 4ss	4	13	-6.8	-1.1	-1.6	-2.3	0.22	3.8	4	0.23
HE20 STBC, M0 to M9 2ss	2	13	-4.4	1.8			0.22	2.9	4	1.07
HE20 STBC, M0 to M9 2ss	3	13	-6.3		-0.7		0.22	3.4	4	0.58
HE20 STBC, M0 to M9 2ss	4	13	-6.8	-1.1	-1.6	-2.3	0.22	3.8	4	0.23

Data Screenshots


5280 MHz: HT/VHT20, M8 to M15

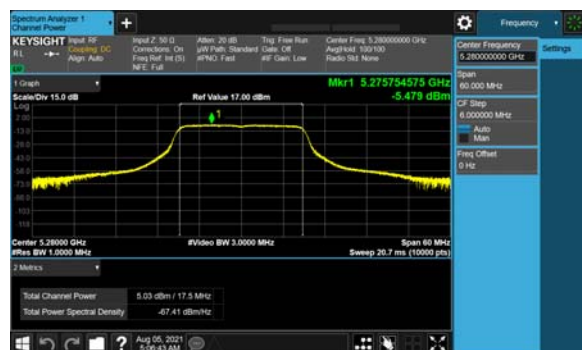

Antenna A

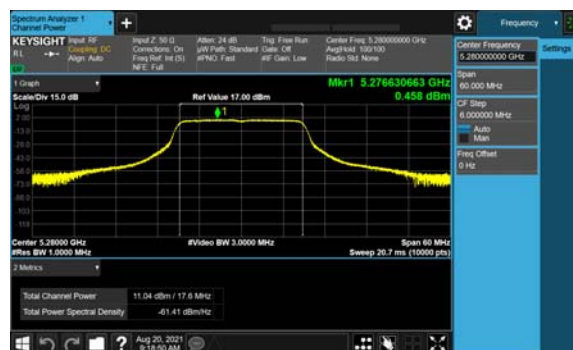


Antenna B

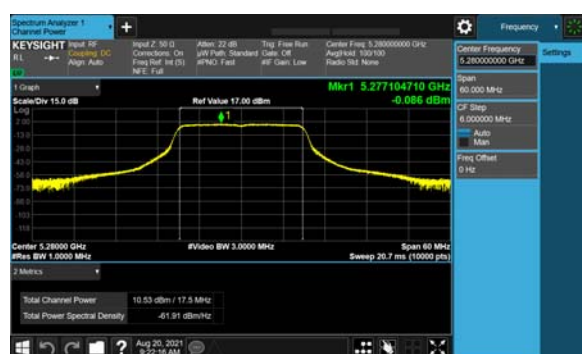


Antenna C


5280 MHz: HT/VHT20, M16 to M23

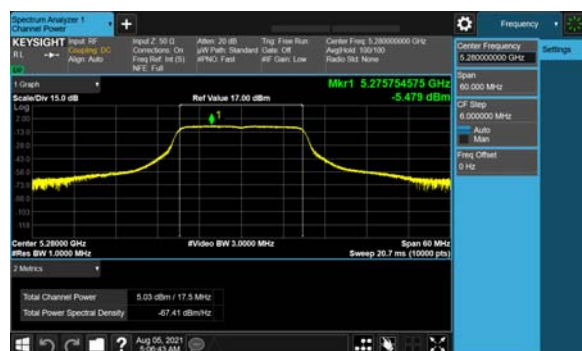

Antenna A

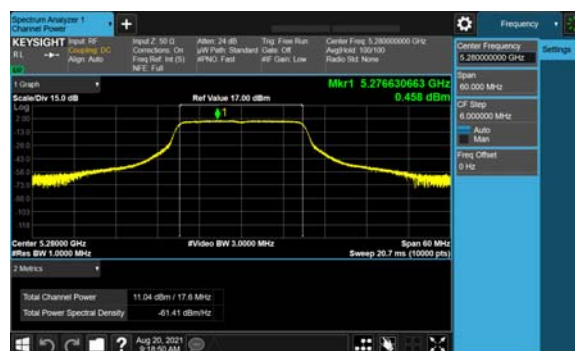


Antenna B

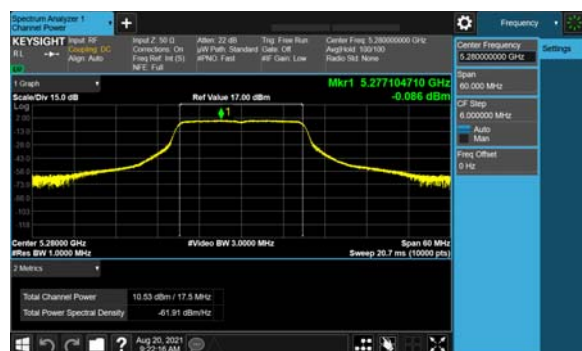


Antenna C


5280 MHz: HT/VHT20 Beam Forming, M8 to M15

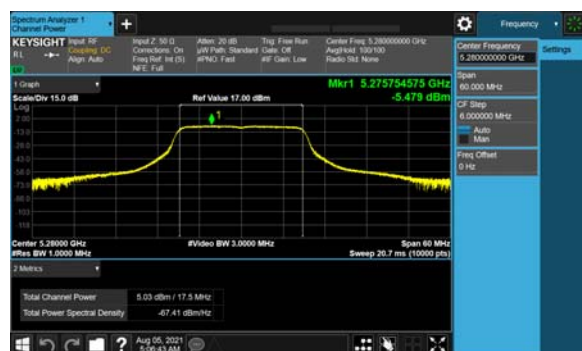

Antenna A

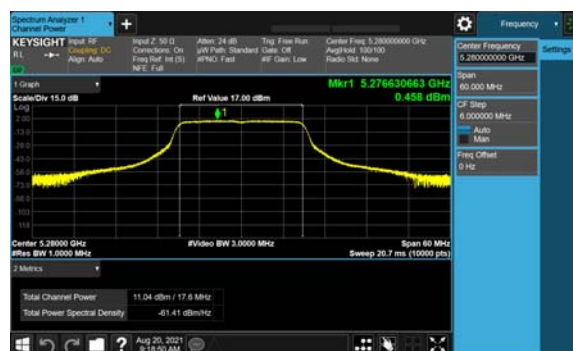

Antenna B

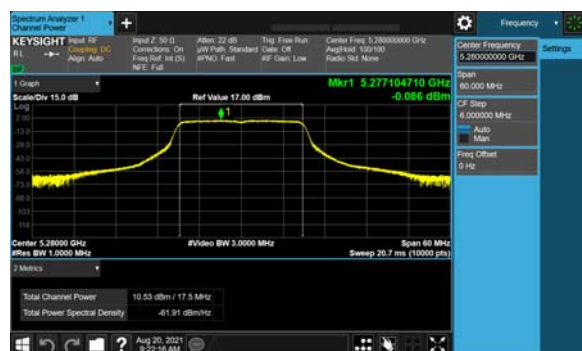

Antenna C

A.5: Conducted Spurious Emissions

Conducted Spurious Emissions Test Requirement

15.407(b):

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.
- (7) The provisions of §15.205 apply to intentional radiators operating under this section.

Use formula below to substitute conducted measurements in place of radiated measurements

$$E[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] - 20 \log(d[\text{meters}]) + 104.77, \text{ where } E = \text{field strength and } d = 3 \text{ meter}$$

- 1) Average Plot, Limit= -41.25 dBm eirp
- 2) Peak plot, Limit = -21.25 dBm eirp

Conducted Spurious Emissions Test Procedure

Ref. ANSI C63.10: 2013

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Conducted Spurious Emissions Test Procedure
1. Connect the antenna port(s) to the spectrum analyzer input. 2. Place the radio in continuous transmit mode 3. Configure Spectrum analyzer as per test parameters below (be sure to enter all losses between the transmitter output and the spectrum analyzer). 4. Use the peak marker function to determine the maximum spurs amplitude level. 5. The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. The worst case output is recorded. (see ANSI C63.10:2013 section 14.3.2.2) 6. Capture graphs and record pertinent measurement data.

Ref. ANSI C63.10: 2013 section 12.7.6 (Peak) and 12.7.7.2 (Average)**KDB 789033 D02 General UNII Test Procedures New Rules v02r01, Sec. 5 (Peak), Sec. 6 (Average Method AD)**

Conducted Spurious Emissions	
Test parameters	
Peak RBW = 1 MHz VBW ≥ 3 MHz Sweep = Auto Detector = Peak Trace = Max Hold.	Average RBW = 1 MHz VBW ≥ 3 MHz Sweep = Auto Detector = RMS Power Averaging

Add the max antenna gain + ground reflection factor (4.7 dB for frequencies between 30 MHz and 1000 MHz, and 0 dB for frequencies > 1000 MHz).

Tested By: Johanna Knudsen, Julian Land, Mathew Blackburn	Date of testing: 26-JUL-2021 to 28-AUG-2021; 01-SEP-2021 to 04-SEP-2021; 11-SEP-2021 to 14-SEP-2021
Test Result: PASS	

Test Equipment

See Appendix C for list of test equipment


Conducted Spurs Average Upper

Frequency 5260 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	13	-66.9	0.23	-53.7	-41	12.44

Data Screenshots

5260 MHz: Non HT20, 6 to 54 Mbps

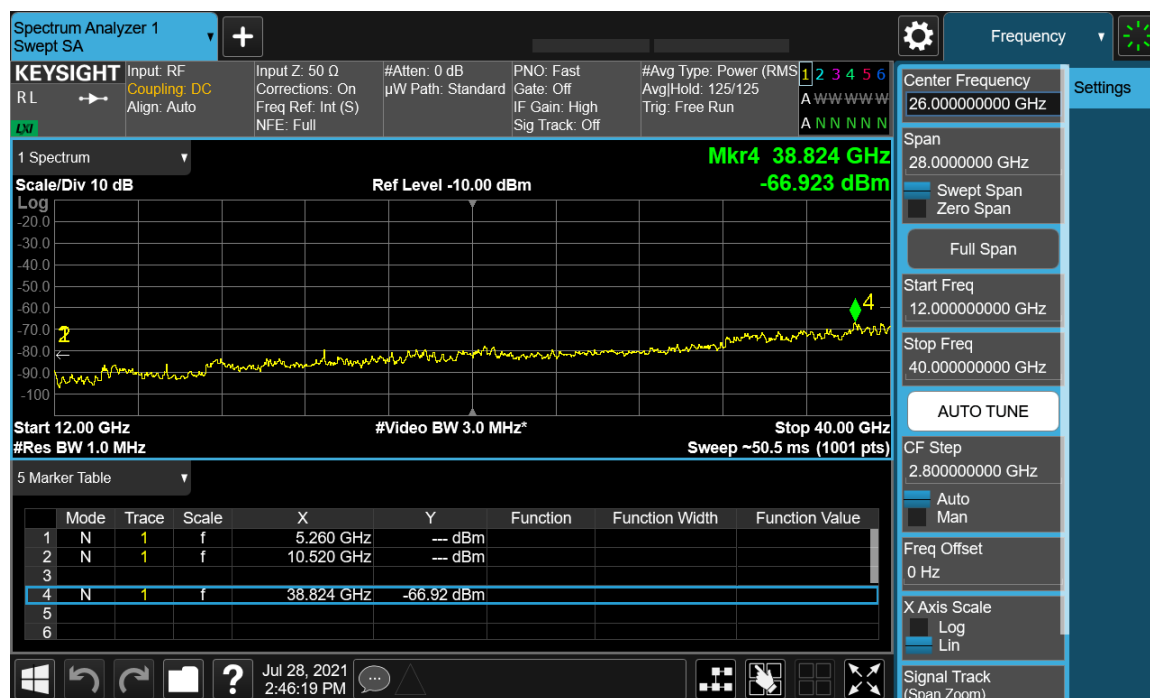

Antenna A


Conducted Spurs Peak Upper

Frequency 5260 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	13	-46.2	0.23	-33.0	-21	11.72

Data Screenshots

5260 MHz: Non HT20, 6 to 54 Mbps

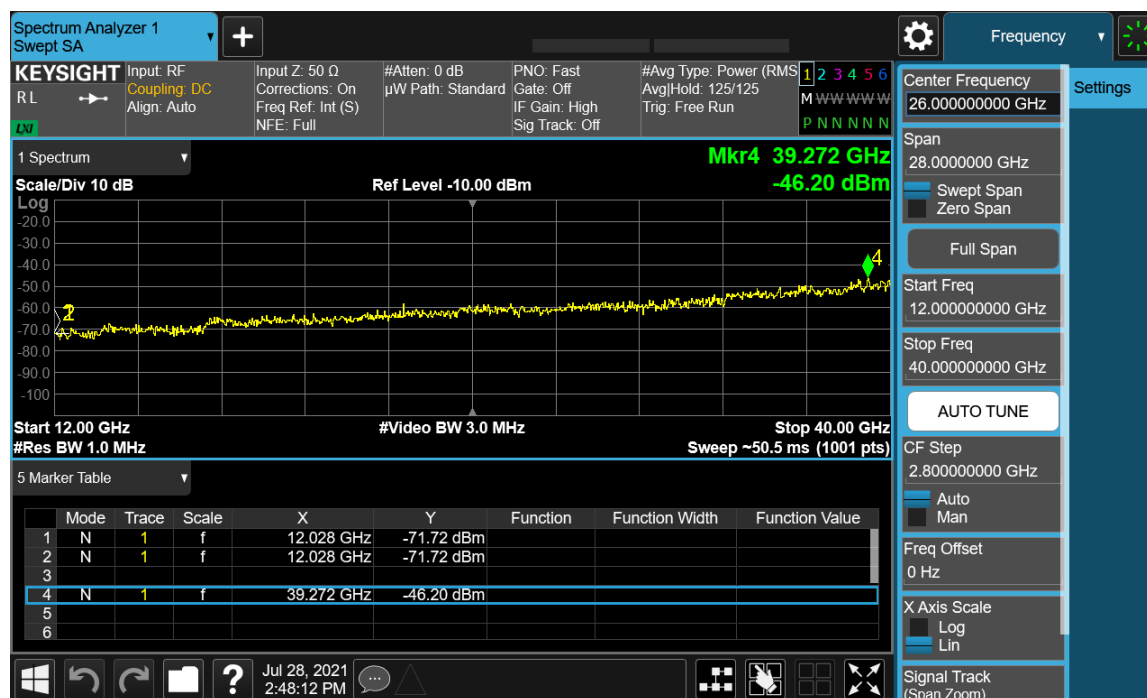

Antenna A

Conducted Spurs Average**Frequency 5260 MHz**

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Tx 3 Spur Power (dBm)	Tx 4 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	13	-63.3				0.23	-50.1	-41	8.82
Non HT20, 6 to 54 Mbps	2	13	-72.3	-69.7			0.23	-54.6	-41	13.32
Non HT20, 6 to 54 Mbps	3	13	-74.7	-72.5	-71.3		0.23	-54.6	-41	13.36
Non HT20, 6 to 54 Mbps	4	13	-77.1	-72.7	-71.3	-71.1	0.23	-53.2	-41	12.0
Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-72.3	-69.7			0.23	-54.6	-41	13.32
Non HT20 Beam Forming, 6 to 54 Mbps	3	16	-74.7	-72.5	-71.3		0.23	-51.6	-41	10.36
Non HT20 Beam Forming, 6 to 54 Mbps	4	16	-77.1	-72.7	-71.3	-71.1	0.23	-50.2	-41	9.0
HT/VHT20, M0 to M7	1	13	-63.1				0.22	-49.9	-41	8.63
HT/VHT20, M0 to M7	2	13	-72.4	-70.0			0.22	-54.8	-41	13.56
HT/VHT20, M8 to M15	2	13	-72.4	-70.0			0.22	-54.8	-41	13.56
HT/VHT20, M0 to M7	3	13	-74.4	-72.6	-71.6		0.22	-54.7	-41	13.48
HT/VHT20, M8 to M15	3	13	-72.2	-69.9	-67.0		0.22	-51.2	-41	9.94
HT/VHT20, M16 to M23	3	13	-72.2	-69.9	-67.0		0.22	-51.2	-41	9.94
HT/VHT20, M0 to M7	4	13	-74.6	-72.7	-71.3	-71.3	0.22	-53.0	-41	11.79
HT/VHT20, M8 to M15	4	13	-72.7	-69.8	-66.9	-68.0	0.22	-49.6	-41	8.36
HT/VHT20, M16 to M23	4	13	-72.7	-69.8	-66.9	-68.0	0.22	-49.6	-41	8.36
HT/VHT20, M24 to M31	4	13	-72.7	-69.8	-66.9	-68.0	0.22	-49.6	-41	8.36
HT/VHT20 Beam Forming, M0 to M7	2	13	-72.4	-70.0			0.22	-54.8	-41	13.56
HT/VHT20 Beam Forming, M8 to M15	2	13	-72.4	-70.0			0.22	-54.8	-41	13.56
HT/VHT20 Beam Forming, M0 to M7	3	16	-74.4	-72.6	-71.6		0.22	-51.7	-41	10.48
HT/VHT20 Beam Forming, M8 to M15	3	13	-72.2	-69.9	-67.0		0.22	-51.2	-41	9.94
HT/VHT20 Beam Forming, M16 to M23	3	13	-72.2	-69.9	-67.0		0.22	-51.2	-41	9.94
HT/VHT20 Beam Forming, M0 to M7	4	16	-74.6	-72.7	-71.3	-71.3	0.22	-50.0	-41	8.79
HT/VHT20 Beam Forming, M8 to M15	4	13	-72.7	-69.8	-66.9	-68.0	0.22	-49.6	-41	8.36
HT/VHT20 Beam Forming, M16 to M23	4	13	-72.7	-69.8	-66.9	-68.0	0.22	-49.6	-41	8.36
HT/VHT20 Beam Forming, M24 to M31	4	13	-72.7	-69.8	-66.9	-68.0	0.22	-49.6	-41	8.36
HT/VHT20 STBC, M0 to M7	2	13	-72.4	-70.0			0.22	-54.8	-41	13.56
HT/VHT20 STBC, M0 to M7	3	13	-72.2	-69.9	-67.0		0.22	-51.2	-41	9.94
HT/VHT20 STBC, M0 to M7	4	13	-72.7	-69.8	-66.9	-68.0	0.22	-49.6	-41	8.36
HE20, M0 to M9 1ss	1	13	-63.4				0.22	-50.2	-41	8.93
HE20, M0 to M9 1ss	2	13	-71.9	-66.0			0.22	-51.8	-41	10.54
HE20, M0 to M9 2ss	2	13	-71.9	-66.0			0.22	-51.8	-41	10.54
HE20, M0 to M9 1ss	3	13	-74.1	-72.5	-71.3		0.22	-54.5	-41	13.25
HE20, M0 to M9 2ss	3	13	-71.9	-69.7	-66.7		0.22	-50.9	-41	9.67

HE20, M0 to M9 3ss	3	13	-71.9	-69.7	-66.7		0.22	-50.9	-41	9.67
HE20, M0 to M9 1ss	4	13	-74.3	-72.6	-71.4	-70.9	0.22	-52.9	-41	11.63
HE20, M0 to M9 2ss	4	13	-72.1	-69.8	-66.8	-67.8	0.22	-49.4	-41	8.2
HE20, M0 to M9 3ss	4	13	-72.1	-69.8	-66.8	-67.8	0.22	-49.4	-41	8.2
HE20, M0 to M9 4ss	4	13	-72.1	-69.8	-66.8	-67.8	0.22	-49.4	-41	8.2
HE20 Beam Forming, M0 to M9 1ss	2	13	-71.9	-66.0			0.22	-51.8	-41	10.54
HE20 Beam Forming, M0 to M9 2ss	2	13	-71.9	-66.0			0.22	-51.8	-41	10.54
HE20 Beam Forming, M0 to M9 1ss	3	16	-74.1	-72.5	-71.3		0.22	-51.5	-41	10.25
HE20 Beam Forming, M0 to M9 2ss	3	13	-71.9	-69.7	-66.7		0.22	-50.9	-41	9.67
HE20 Beam Forming, M0 to M9 3ss	3	13	-71.9	-69.7	-66.7		0.22	-50.9	-41	9.67
HE20 Beam Forming, M0 to M9 1ss	4	16	-74.3	-72.6	-71.4	-70.9	0.22	-49.9	-41	8.63
HE20 Beam Forming, M0 to M9 2ss	4	13	-72.1	-69.8	-66.8	-67.8	0.22	-49.4	-41	8.2
HE20 Beam Forming, M0 to M9 3ss	4	13	-72.1	-69.8	-66.8	-67.8	0.22	-49.4	-41	8.2
HE20 Beam Forming, M0 to M9 4ss	4	13	-72.1	-69.8	-66.8	-67.8	0.22	-49.4	-41	8.2
HE20 STBC, M0 to M9 2ss	2	13	-71.9	-66.0			0.22	-51.8	-41	10.54
HE20 STBC, M0 to M9 2ss	3	13	-71.9	-69.7	-66.7		0.22	-50.9	-41	9.67
HE20 STBC, M0 to M9 2ss	4	13	-72.1	-69.8	-66.8	-67.8	0.22	-49.4	-41	8.2

Frequency 5270 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Tx 3 Spur Power (dBm)	Tx 4 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT40, 6 to 54 Mbps	1	13	-61.7				0.34	-48.4	-41	7.11
Non HT40, 6 to 54 Mbps	2	13	-67.6	-64.6			0.34	-49.5	-41	8.25
Non HT40, 6 to 54 Mbps	3	13	-72.1	-69.4	-67.4		0.34	-51.1	-41	9.87
Non HT40, 6 to 54 Mbps	4	13	-72.2	-69.4	-67.2	-67.8	0.34	-49.4	-41	8.16
HT/VHT40, M0 to M7	1	13	-61.8				0.32	-48.5	-41	7.23
HT/VHT40, M0 to M7	2	13	-67.9	-64.7			0.32	-49.7	-41	8.43
HT/VHT40, M8 to M15	2	13	-67.9	-64.7			0.32	-49.7	-41	8.43
HT/VHT40, M0 to M7	3	13	-72.5	-69.6	-66.9		0.32	-51.0	-41	9.75
HT/VHT40, M8 to M15	3	13	-72.3	-69.2	-66.6		0.32	-50.7	-41	9.43
HT/VHT40, M16 to M23	3	13	-72.3	-69.2	-66.6		0.32	-50.7	-41	9.43
HT/VHT40, M0 to M7	4	13	-72.7	-69.6	-67.3	-67.6	0.32	-49.5	-41	8.24
HT/VHT40, M8 to M15	4	13	-72.1	-69.3	-66.9	-67.7	0.32	-49.3	-41	8.0
HT/VHT40, M16 to M23	4	13	-72.1	-69.3	-66.9	-67.7	0.32	-49.3	-41	8.0
HT/VHT40, M24 to M31	4	13	-72.1	-69.3	-66.9	-67.7	0.32	-49.3	-41	8.0
HT/VHT40 Beam Forming, M0 to M7	2	13	-67.9	-64.7			0.32	-49.7	-41	8.43
HT/VHT40 Beam Forming, M8 to M15	2	13	-67.9	-64.7			0.32	-49.7	-41	8.43
HT/VHT40 Beam Forming, M0 to M7	3	16	-72.5	-69.6	-66.9		0.32	-48.0	-41	6.75

HT/VHT40 Beam Forming, M8 to M15	3	13	-72.3	-69.2	-66.6		0.32	-50.7	-41	9.43
HT/VHT40 Beam Forming, M16 to M23	3	13	-72.3	-69.2	-66.6		0.32	-50.7	-41	9.43
HT/VHT40 Beam Forming, M0 to M7	4	16	-75.8	-72.1	-70.8	-70.7	0.32	-49.6	-41	8.34
HT/VHT40 Beam Forming, M8 to M15	4	13	-72.1	-69.3	-66.9	-67.7	0.32	-49.3	-41	8.0
HT/VHT40 Beam Forming, M16 to M23	4	13	-72.1	-69.3	-66.9	-67.7	0.32	-49.3	-41	8.0
HT/VHT40 Beam Forming, M24 to M31	4	13	-72.1	-69.3	-66.9	-67.7	0.32	-49.3	-41	8.0
HT/VHT40 STBC, M0 to M7	2	13	-67.9	-64.7			0.32	-49.7	-41	8.43
HT/VHT40 STBC, M0 to M7	3	13	-72.3	-69.2	-66.6		0.32	-50.7	-41	9.43
HT/VHT40 STBC, M0 to M7	4	13	-72.1	-69.3	-66.9	-67.7	0.32	-49.3	-41	8.0
HE40, M0 to M9 1ss	1	13	-61.3				0.29	-48.0	-41	6.76
HE40, M0 to M9 1ss	2	13	-67.6	-64.8			0.29	-49.7	-41	8.43
HE40, M0 to M9 2ss	2	13	-67.6	-64.8			0.29	-49.7	-41	8.43
HE40, M0 to M9 1ss	3	13	-71.9	-69.1	-66.9		0.29	-50.8	-41	9.53
HE40, M0 to M9 2ss	3	13	-72.1	-69.0	-62.8		0.29	-48.2	-41	6.93
HE40, M0 to M9 3ss	3	13	-72.1	-69.0	-62.8		0.29	-48.2	-41	6.93
HE40, M0 to M9 1ss	4	13	-72.0	-69.4	-67.1	-67.6	0.29	-49.3	-41	8.08
HE40, M0 to M9 2ss	4	13	-72.0	-69.0	-66.6	-67.5	0.29	-49.0	-41	7.78
HE40, M0 to M9 3ss	4	13	-72.0	-69.0	-66.6	-67.5	0.29	-49.0	-41	7.78
HE40, M0 to M9 4ss	4	13	-72.0	-69.0	-66.6	-67.5	0.29	-49.0	-41	7.78
HE40 Beam Forming, M0 to M9 1ss	2	13	-67.6	-64.8			0.29	-49.7	-41	8.43
HE40 Beam Forming, M0 to M9 2ss	2	13	-67.6	-64.8			0.29	-49.7	-41	8.43
HE40 Beam Forming, M0 to M9 1ss	3	16	-72.0	-69.4	-67.1		0.29	-48.0	-41	6.74
HE40 Beam Forming, M0 to M9 2ss	3	13	-72.1	-69.0	-62.8		0.29	-48.2	-41	6.93
HE40 Beam Forming, M0 to M9 3ss	3	13	-72.1	-69.0	-62.8		0.29	-48.2	-41	6.93
HE40 Beam Forming, M0 to M9 1ss	4	16	-74.9	-71.6	-70.1	-70.5	0.29	-49.1	-41	7.86
HE40 Beam Forming, M0 to M9 2ss	4	13	-72.0	-69.0	-66.6	-67.5	0.29	-49.0	-41	7.78
HE40 Beam Forming, M0 to M9 3ss	4	13	-72.0	-69.0	-66.6	-67.5	0.29	-49.0	-41	7.78
HE40 Beam Forming, M0 to M9 4ss	4	13	-72.0	-69.0	-66.6	-67.5	0.29	-49.0	-41	7.78
HE40 STBC, M0 to M9 2ss	2	13	-67.6	-64.8			0.29	-49.7	-41	8.43
HE40 STBC, M0 to M9 2ss	3	13	-72.1	-69.0	-62.8		0.29	-48.2	-41	6.93
HE40 STBC, M0 to M9 2ss	4	13	-72.0	-69.0	-66.6	-67.5	0.29	-49.0	-41	7.78

Frequency 5280 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Tx 3 Spur Power (dBm)	Tx 4 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	13	-64.4				0.23	-51.2	-41	9.92
Non HT20, 6 to 54 Mbps	2	13	-72.1	-68.4			0.23	-53.6	-41	12.38
Non HT20, 6 to 54 Mbps	3	13	-74.9	-72.0	-70.5		0.23	-54.1	-41	12.86
Non HT20, 6 to 54 Mbps	4	13	-75.0	-72.1	-70.4	-72.6	0.23	-53.0	-41	11.73
Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-72.1	-68.4			0.23	-53.6	-41	12.38
Non HT20 Beam Forming, 6 to 54 Mbps	3	16	-74.9	-72.0	-70.5		0.23	-51.1	-41	9.86
Non HT20 Beam Forming, 6 to 54 Mbps	4	16	-75.0	-72.1	-70.4	-72.6	0.23	-50.0	-41	8.73
HT/VHT20, M0 to M7	1	13	-64.2				0.22	-51.0	-41	9.73
HT/VHT20, M0 to M7	2	13	-72.2	-68.7			0.22	-53.9	-41	12.63
HT/VHT20, M8 to M15	2	13	-72.2	-68.7			0.22	-53.9	-41	12.63
HT/VHT20, M0 to M7	3	13	-75.2	-71.7	-70.0		0.22	-53.8	-41	12.57
HT/VHT20, M8 to M15	3	13	-72.2	-68.6	-66.0		0.22	-50.3	-41	9.0
HT/VHT20, M16 to M23	3	13	-72.2	-68.6	-66.0		0.22	-50.3	-41	9.0
HT/VHT20, M0 to M7	4	13	-75.1	-71.8	-70.6	-71.0	0.22	-52.6	-41	11.32
HT/VHT20, M8 to M15	4	13	-72.3	-69.4	-66.7	-67.1	0.22	-49.1	-41	7.88
HT/VHT20, M16 to M23	4	13	-72.3	-69.4	-66.7	-67.1	0.22	-49.1	-41	7.88
HT/VHT20, M24 to M31	4	13	-72.3	-69.4	-66.7	-67.1	0.22	-49.1	-41	7.88
HT/VHT20 Beam Forming, M0 to M7	2	13	-72.2	-68.7			0.22	-53.9	-41	12.63
HT/VHT20 Beam Forming, M8 to M15	2	13	-72.2	-68.7			0.22	-53.9	-41	12.63
HT/VHT20 Beam Forming, M0 to M7	3	16	-75.2	-71.7	-70.0		0.22	-50.8	-41	9.57
HT/VHT20 Beam Forming, M8 to M15	3	13	-72.2	-68.6	-66.0		0.22	-50.3	-41	9.0
HT/VHT20 Beam Forming, M16 to M23	3	13	-72.2	-68.6	-66.0		0.22	-50.3	-41	9.0
HT/VHT20 Beam Forming, M0 to M7	4	16	-75.1	-71.8	-70.6	-71.0	0.22	-49.6	-41	8.32
HT/VHT20 Beam Forming, M8 to M15	4	13	-72.3	-69.4	-66.7	-67.1	0.22	-49.1	-41	7.88
HT/VHT20 Beam Forming, M16 to M23	4	13	-72.3	-69.4	-66.7	-67.1	0.22	-49.1	-41	7.88
HT/VHT20 Beam Forming, M24 to M31	4	13	-72.3	-69.4	-66.7	-67.1	0.22	-49.1	-41	7.88
HT/VHT20 STBC, M0 to M7	2	13	-72.2	-68.7			0.22	-53.9	-41	12.63
HT/VHT20 STBC, M0 to M7	3	13	-72.2	-68.6	-66.0		0.22	-50.3	-41	9.0
HT/VHT20 STBC, M0 to M7	4	13	-72.3	-69.4	-66.7	-67.1	0.22	-49.1	-41	7.88
HE20, M0 to M9 1ss	1	13	-64.1				0.22	-50.9	-41	9.63
HE20, M0 to M9 1ss	2	13	-71.9	-68.3			0.22	-53.5	-41	12.26
HE20, M0 to M9 2ss	2	13	-71.9	-68.3			0.22	-53.5	-41	12.26
HE20, M0 to M9 1ss	3	13	-75.0	-71.2	-70.1		0.22	-53.7	-41	12.41
HE20, M0 to M9 2ss	3	13	-72.0	-69.0	-66.4		0.22	-50.6	-41	9.32
HE20, M0 to M9 3ss	3	13	-72.0	-69.0	-66.4		0.22	-50.6	-41	9.32
HE20, M0 to M9 1ss	4	13	-75.1	-71.8	-70.3	-71.0	0.22	-52.5	-41	11.22

HE20, M0 to M9 2ss	4	13	-72.0	-69.2	-66.7	-66.9	0.22	-49.0	-41	7.74
HE20, M0 to M9 3ss	4	13	-72.0	-69.2	-66.7	-66.9	0.22	-49.0	-41	7.74
HE20, M0 to M9 4ss	4	13	-72.0	-69.2	-66.7	-66.9	0.22	-49.0	-41	7.74
HE20 Beam Forming, M0 to M9 1ss	2	13	-71.9	-68.3			0.22	-53.5	-41	12.26
HE20 Beam Forming, M0 to M9 2ss	2	13	-71.9	-68.3			0.22	-53.5	-41	12.26
HE20 Beam Forming, M0 to M9 1ss	3	16	-75.0	-71.2	-70.1		0.22	-50.7	-41	9.41
HE20 Beam Forming, M0 to M9 2ss	3	13	-72.0	-69.0	-66.4		0.22	-50.6	-41	9.32
HE20 Beam Forming, M0 to M9 3ss	3	13	-72.0	-69.0	-66.4		0.22	-50.6	-41	9.32
HE20 Beam Forming, M0 to M9 1ss	4	16	-75.1	-71.8	-70.3	-71.0	0.22	-49.5	-41	8.22
HE20 Beam Forming, M0 to M9 2ss	4	13	-72.0	-69.2	-66.7	-66.9	0.22	-49.0	-41	7.74
HE20 Beam Forming, M0 to M9 3ss	4	13	-72.0	-69.2	-66.7	-66.9	0.22	-49.0	-41	7.74
HE20 Beam Forming, M0 to M9 4ss	4	13	-72.0	-69.2	-66.7	-66.9	0.22	-49.0	-41	7.74
HE20 STBC, M0 to M9 2ss	2	13	-71.9	-68.3			0.22	-53.5	-41	12.26
HE20 STBC, M0 to M9 2ss	3	13	-72.0	-69.0	-66.4		0.22	-50.6	-41	9.32
HE20 STBC, M0 to M9 2ss	4	13	-72.0	-69.2	-66.7	-66.9	0.22	-49.0	-41	7.74

Frequency 5290 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Tx 3 Spur Power (dBm)	Tx 4 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT80, 6 to 54 Mbps	1	13	-67.6				0.28	-54.3	-41	13.07
Non HT80, 6 to 54 Mbps	2	13	-72.3	-68.6			0.28	-53.8	-41	12.53
Non HT80, 6 to 54 Mbps	3	13	-72.1	-68.9	-66.0		0.28	-50.3	-41	9.02
Non HT80, 6 to 54 Mbps	4	13	-72.1	-68.9	-66.0	-66.8	0.28	-48.6	-41	7.34
VHT80, M0 to M9 1ss	1	13	-67.1				0.35	-53.8	-41	12.5
VHT80, M0 to M9 1ss	2	13	-72.0	-68.4			0.33	-53.5	-41	12.25
VHT80, M0 to M9 2ss	2	13	-72.0	-68.4			0.33	-53.5	-41	12.25
VHT80, M0 to M9 1ss	3	13	-72.3	-68.5	-66.3		0.33	-50.3	-41	9.04
VHT80, M0 to M9 2ss	3	13	-72.3	-68.5	-66.3		0.33	-50.3	-41	9.04
VHT80, M0 to M9 3ss	3	13	-72.3	-68.5	-66.3		0.33	-50.3	-41	9.04
VHT80, M0 to M9 1ss	4	13	-72.2	-68.6	-66.0	-67.3	0.33	-48.6	-41	7.39
VHT80, M0 to M9 2ss	4	13	-72.2	-68.6	-66.0	-67.3	0.33	-48.6	-41	7.39
VHT80, M0 to M9 3ss	4	13	-72.2	-68.6	-66.0	-67.3	0.33	-48.6	-41	7.39
VHT80, M0 to M9 4ss	4	13	-72.2	-68.6	-66.0	-67.3	0.33	-48.6	-41	7.39
VHT80 Beam Forming, M0 to M9 1ss	2	13	-72.0	-68.4			0.33	-53.5	-41	12.25
VHT80 Beam Forming, M0 to M9 2ss	2	13	-72.0	-68.4			0.33	-53.5	-41	12.25
VHT80 Beam Forming, M0 to M9 1ss	3	16	-75.2	-71.5	-69.8		0.33	-50.5	-41	9.29
VHT80 Beam Forming, M0 to M9 2ss	3	13	-72.3	-68.5	-66.3		0.33	-50.3	-41	9.04

VHT80 Beam Forming, M0 to M9 3ss	3	13	-72.3	-68.5	-66.3		0.33	-50.3	-41	9.04
VHT80 Beam Forming, M0 to M9 1ss	4	16	-75.2	-71.5	-70.0	-70.6	0.33	-49.1	-41	7.82
VHT80 Beam Forming, M0 to M9 2ss	4	13	-72.2	-68.6	-66.0	-67.3	0.33	-48.6	-41	7.39
VHT80 Beam Forming, M0 to M9 3ss	4	13	-72.2	-68.6	-66.0	-67.3	0.33	-48.6	-41	7.39
VHT80 Beam Forming, M0 to M9 4ss	4	13	-72.2	-68.6	-66.0	-67.3	0.33	-48.6	-41	7.39
VHT80 STBC, M0 to M9 1ss	2	13	-72.0	-68.4			0.33	-53.5	-41	12.25
VHT80 STBC, M0 to M9 1ss	3	13	-72.3	-68.5	-66.3		0.33	-50.3	-41	9.04
VHT80 STBC, M0 to M9 1ss	4	13	-72.2	-68.6	-66.0	-67.3	0.33	-48.6	-41	7.39
HE80, M0 to M9 1ss	1	13	-63.6				0.23	-50.4	-41	9.12
HE80, M0 to M9 1ss	2	13	-72.1	-68.2			0.23	-53.5	-41	12.24
HE80, M0 to M9 2ss	2	13	-72.1	-68.2			0.23	-53.5	-41	12.24
HE80, M0 to M9 1ss	3	13	-71.8	-68.5	-66.0		0.23	-50.2	-41	8.91
HE80, M0 to M9 2ss	3	13	-71.8	-68.5	-66.0		0.23	-50.2	-41	8.91
HE80, M0 to M9 3ss	3	13	-71.8	-68.5	-66.0		0.23	-50.2	-41	8.91
HE80, M0 to M9 1ss	4	13	-71.9	-68.0	-65.8	-67.3	0.23	-48.5	-41	7.24
HE80, M0 to M9 2ss	4	13	-71.9	-68.0	-65.8	-67.3	0.23	-48.5	-41	7.24
HE80, M0 to M9 3ss	4	13	-71.9	-68.0	-65.8	-67.3	0.23	-48.5	-41	7.24
HE80, M0 to M9 4ss	4	13	-71.9	-68.0	-65.8	-67.3	0.23	-48.5	-41	7.24
HE80 Beam Forming, M0 to M9 1ss	2	13	-72.1	-68.2			0.23	-53.5	-41	12.24
HE80 Beam Forming, M0 to M9 2ss	2	13	-72.1	-68.2			0.23	-53.5	-41	12.24
HE80 Beam Forming, M0 to M9 1ss	3	16	-74.8	-71.6	-69.6		0.23	-50.5	-41	9.26
HE80 Beam Forming, M0 to M9 2ss	3	13	-71.8	-68.5	-66.0		0.23	-50.2	-41	8.91
HE80 Beam Forming, M0 to M9 3ss	3	13	-71.8	-68.5	-66.0		0.23	-50.2	-41	8.91
HE80 Beam Forming, M0 to M9 1ss	4	16	-74.8	-71.6	-69.6	-70.1	0.23	-48.9	-41	7.61
HE80 Beam Forming, M0 to M9 2ss	4	13	-71.9	-68.0	-65.8	-67.3	0.23	-48.5	-41	7.24
HE80 Beam Forming, M0 to M9 3ss	4	13	-71.9	-68.0	-65.8	-67.3	0.23	-48.5	-41	7.24
HE80 Beam Forming, M0 to M9 4ss	4	13	-71.9	-68.0	-65.8	-67.3	0.23	-48.5	-41	7.24
HE80 STBC, M0 to M9 1ss	2	13	-72.1	-68.2			0.23	-53.5	-41	12.24
HE80 STBC, M0 to M9 1ss	3	13	-71.8	-68.5	-66.0		0.23	-50.2	-41	8.91
HE80 STBC, M0 to M9 1ss	4	13	-71.9	-68.0	-65.8	-67.3	0.23	-48.5	-41	7.24

Frequency 5300 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Tx 3 Spur Power (dBm)	Tx 4 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	13	-64.0				0.23	-50.8	-41	9.52
Non HT20, 6 to 54 Mbps	2	13	-71.8	-65.2			0.23	-51.1	-41	9.86
Non HT20, 6 to 54 Mbps	3	13	-75.3	-72.3	-70.6		0.23	-54.3	-41	13.08
Non HT20, 6 to 54 Mbps	4	13	-75.0	-72.5	-71.3	-72.5	0.23	-53.4	-41	12.13
Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-71.8	-65.2			0.23	-51.1	-41	9.86
Non HT20 Beam Forming, 6 to 54 Mbps	3	16	-75.3	-72.3	-70.6		0.23	-51.3	-41	10.08
Non HT20 Beam Forming, 6 to 54 Mbps	4	16	-75.0	-72.5	-71.3	-72.5	0.23	-50.4	-41	9.13
HT/VHT20, M0 to M7	1	13	-64.1				0.22	-50.9	-41	9.63
HT/VHT20, M0 to M7	2	13	-72.4	-65.2			0.22	-51.2	-41	9.97
HT/VHT20, M8 to M15	2	13	-72.4	-65.2			0.22	-51.2	-41	9.97
HT/VHT20, M0 to M7	3	13	-75.2	-72.1	-70.6		0.22	-54.3	-41	13.0
HT/VHT20, M8 to M15	3	13	-72.2	-68.4	-66.2		0.22	-50.3	-41	9.05
HT/VHT20, M16 to M23	3	13	-72.2	-68.4	-66.2		0.22	-50.3	-41	9.05
HT/VHT20, M0 to M7	4	13	-75.0	-72.6	-70.9	-71.3	0.22	-52.9	-41	11.69
HT/VHT20, M8 to M15	4	13	-72.2	-68.7	-67.1	-68.1	0.22	-49.4	-41	8.17
HT/VHT20, M16 to M23	4	13	-72.2	-68.7	-67.1	-68.1	0.22	-49.4	-41	8.17
HT/VHT20, M24 to M31	4	13	-72.2	-68.7	-67.1	-68.1	0.22	-49.4	-41	8.17
HT/VHT20 Beam Forming, M0 to M7	2	13	-72.4	-65.2			0.22	-51.2	-41	9.97
HT/VHT20 Beam Forming, M8 to M15	2	13	-72.4	-65.2			0.22	-51.2	-41	9.97
HT/VHT20 Beam Forming, M0 to M7	3	16	-75.2	-72.1	-70.6		0.22	-51.3	-41	10.0
HT/VHT20 Beam Forming, M8 to M15	3	13	-72.2	-68.4	-66.2		0.22	-50.3	-41	9.05
HT/VHT20 Beam Forming, M16 to M23	3	13	-72.2	-68.4	-66.2		0.22	-50.3	-41	9.05
HT/VHT20 Beam Forming, M0 to M7	4	16	-75.0	-72.6	-70.9	-71.3	0.22	-49.9	-41	8.69
HT/VHT20 Beam Forming, M8 to M15	4	13	-72.2	-68.7	-67.1	-68.1	0.22	-49.4	-41	8.17
HT/VHT20 Beam Forming, M16 to M23	4	13	-72.2	-68.7	-67.1	-68.1	0.22	-49.4	-41	8.17
HT/VHT20 Beam Forming, M24 to M31	4	13	-72.2	-68.7	-67.1	-68.1	0.22	-49.4	-41	8.17
HT/VHT20 STBC, M0 to M7	2	13	-72.4	-65.2			0.22	-51.2	-41	9.97
HT/VHT20 STBC, M0 to M7	3	13	-72.2	-68.4	-66.2		0.22	-50.3	-41	9.05
HT/VHT20 STBC, M0 to M7	4	13	-72.2	-68.7	-67.1	-68.1	0.22	-49.4	-41	8.17
HE20, M0 to M9 1ss	1	13	-64.1				0.22	-50.9	-41	9.63
HE20, M0 to M9 1ss	2	13	-72.0	-65.0			0.22	-51.0	-41	9.74
HE20, M0 to M9 2ss	2	13	-72.0	-65.0			0.22	-51.0	-41	9.74
HE20, M0 to M9 1ss	3	13	-74.6	-72.0	-70.3		0.22	-54.0	-41	12.72
HE20, M0 to M9 2ss	3	13	-72.2	-68.5	-66.6		0.22	-50.5	-41	9.3
HE20, M0 to M9 3ss	3	13	-72.2	-68.5	-66.6		0.22	-50.5	-41	9.3
HE20, M0 to M9 1ss	4	13	-75.0	-72.4	-70.7	-71.0	0.22	-52.7	-41	11.49

HE20, M0 to M9 2ss	4	13	-72.1	-68.8	-66.6	-67.9	0.22	-49.2	-41	7.94
HE20, M0 to M9 3ss	4	13	-72.1	-68.8	-66.6	-67.9	0.22	-49.2	-41	7.94
HE20, M0 to M9 4ss	4	13	-72.1	-68.8	-66.6	-67.9	0.22	-49.2	-41	7.94
HE20 Beam Forming, M0 to M9 1ss	2	13	-72.0	-65.0			0.22	-51.0	-41	9.74
HE20 Beam Forming, M0 to M9 2ss	2	13	-72.0	-65.0			0.22	-51.0	-41	9.74
HE20 Beam Forming, M0 to M9 1ss	3	16	-74.6	-72.0	-70.3		0.22	-51.0	-41	9.72
HE20 Beam Forming, M0 to M9 2ss	3	13	-72.2	-68.5	-66.6		0.22	-50.5	-41	9.3
HE20 Beam Forming, M0 to M9 3ss	3	13	-72.2	-68.5	-66.6		0.22	-50.5	-41	9.3
HE20 Beam Forming, M0 to M9 1ss	4	16	-75.0	-72.4	-70.7	-71.0	0.22	-49.7	-41	8.49
HE20 Beam Forming, M0 to M9 2ss	4	13	-72.1	-68.8	-66.6	-67.9	0.22	-49.2	-41	7.94
HE20 Beam Forming, M0 to M9 3ss	4	13	-72.1	-68.8	-66.6	-67.9	0.22	-49.2	-41	7.94
HE20 Beam Forming, M0 to M9 4ss	4	13	-72.1	-68.8	-66.6	-67.9	0.22	-49.2	-41	7.94
HE20 STBC, M0 to M9 2ss	2	13	-72.0	-65.0			0.22	-51.0	-41	9.74
HE20 STBC, M0 to M9 2ss	3	13	-72.2	-68.5	-66.6		0.22	-50.5	-41	9.3
HE20 STBC, M0 to M9 2ss	4	13	-72.1	-68.8	-66.6	-67.9	0.22	-49.2	-41	7.94

Frequency 5310 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Tx 3 Spur Power (dBm)	Tx 4 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT40, 6 to 54 Mbps	1	13	-67.6				0.34	-54.3	-41	13.01
Non HT40, 6 to 54 Mbps	2	13	-72.1	-68.6			0.34	-53.7	-41	12.41
Non HT40, 6 to 54 Mbps	3	13	-72.2	-68.7	-66.2		0.34	-50.3	-41	9.03
Non HT40, 6 to 54 Mbps	4	13	-75.3	-71.6	-70.4	-70.8	0.34	-52.3	-41	11.05
HT/VHT40, M0 to M7	1	13	-63.3				0.32	-50.0	-41	8.73
HT/VHT40, M0 to M7	2	13	-72.1	-67.8			0.32	-53.1	-41	11.86
HT/VHT40, M8 to M15	2	13	-72.1	-67.8			0.32	-53.1	-41	11.86
HT/VHT40, M0 to M7	3	13	-72.4	-68.6	-66.6		0.32	-50.5	-41	9.26
HT/VHT40, M8 to M15	3	13	-72.4	-68.3	-66.3		0.32	-50.2	-41	9.0
HT/VHT40, M16 to M23	3	13	-72.4	-68.3	-66.3		0.32	-50.2	-41	9.0
HT/VHT40, M0 to M7	4	13	-72.2	-68.8	-66.8	-67.8	0.32	-49.1	-41	7.89
HT/VHT40, M8 to M15	4	13	-72.2	-68.8	-66.8	-67.8	0.32	-49.1	-41	7.89
HT/VHT40, M16 to M23	4	13	-72.2	-68.8	-66.8	-67.8	0.32	-49.1	-41	7.89
HT/VHT40, M24 to M31	4	13	-72.2	-68.8	-66.8	-67.8	0.32	-49.1	-41	7.89
HT/VHT40 Beam Forming, M0 to M7	2	13	-72.1	-67.8			0.32	-53.1	-41	11.86
HT/VHT40 Beam Forming, M8 to M15	2	13	-72.1	-67.8			0.32	-53.1	-41	11.86
HT/VHT40 Beam Forming, M0 to M7	3	16	-72.2	-68.8	-66.8		0.32	-47.6	-41	6.4
HT/VHT40 Beam Forming, M8 to M15	3	13	-72.4	-68.3	-66.3		0.32	-50.2	-41	9.0

HT/VHT40 Beam Forming, M16 to M23	3	13	-72.4	-68.3	-66.3		0.32	-50.2	-41	9.0
HT/VHT40 Beam Forming, M0 to M7	4	16	-75.2	-72.0	-70.9	-71.0	0.32	-49.6	-41	8.38
HT/VHT40 Beam Forming, M8 to M15	4	13	-72.2	-68.8	-66.8	-67.8	0.32	-49.1	-41	7.89
HT/VHT40 Beam Forming, M16 to M23	4	13	-72.2	-68.8	-66.8	-67.8	0.32	-49.1	-41	7.89
HT/VHT40 Beam Forming, M24 to M31	4	13	-72.2	-68.8	-66.8	-67.8	0.32	-49.1	-41	7.89
HT/VHT40 STBC, M0 to M7	2	13	-72.1	-67.8			0.32	-53.1	-41	11.86
HT/VHT40 STBC, M0 to M7	3	13	-72.4	-68.3	-66.3		0.32	-50.2	-41	9.0
HT/VHT40 STBC, M0 to M7	4	13	-72.2	-68.8	-66.8	-67.8	0.32	-49.1	-41	7.89
HE40, M0 to M9 1ss	1	13	-63.1				0.29	-49.8	-41	8.56
HE40, M0 to M9 1ss	2	13	-72.2	-68.2			0.29	-53.5	-41	12.2
HE40, M0 to M9 2ss	2	13	-72.2	-68.2			0.29	-53.5	-41	12.2
HE40, M0 to M9 1ss	3	13	-72.2	-68.5	-66.1		0.29	-50.2	-41	8.96
HE40, M0 to M9 2ss	3	13	-72.2	-68.5	-66.1		0.29	-50.2	-41	8.96
HE40, M0 to M9 3ss	3	13	-72.2	-68.5	-66.1		0.29	-50.2	-41	8.96
HE40, M0 to M9 1ss	4	13	-72.2	-68.7	-66.3	-67.9	0.29	-49.0	-41	7.74
HE40, M0 to M9 2ss	4	13	-72.2	-68.7	-66.3	-67.9	0.29	-49.0	-41	7.74
HE40, M0 to M9 3ss	4	13	-72.2	-68.7	-66.3	-67.9	0.29	-49.0	-41	7.74
HE40, M0 to M9 4ss	4	13	-72.2	-68.7	-66.3	-67.9	0.29	-49.0	-41	7.74
HE40 Beam Forming, M0 to M9 1ss	2	13	-72.2	-68.2			0.29	-53.5	-41	12.2
HE40 Beam Forming, M0 to M9 2ss	2	13	-72.2	-68.2			0.29	-53.5	-41	12.2
HE40 Beam Forming, M0 to M9 1ss	3	16	-75.0	-71.7	-70.4		0.29	-50.9	-41	9.66
HE40 Beam Forming, M0 to M9 2ss	3	13	-72.2	-68.5	-66.1		0.29	-50.2	-41	8.96
HE40 Beam Forming, M0 to M9 3ss	3	13	-72.2	-68.5	-66.1		0.29	-50.2	-41	8.96
HE40 Beam Forming, M0 to M9 1ss	4	16	-74.9	-71.8	-70.3	-70.9	0.29	-49.3	-41	8.1
HE40 Beam Forming, M0 to M9 2ss	4	13	-72.2	-68.7	-66.3	-67.9	0.29	-49.0	-41	7.74
HE40 Beam Forming, M0 to M9 3ss	4	13	-72.2	-68.7	-66.3	-67.9	0.29	-49.0	-41	7.74
HE40 Beam Forming, M0 to M9 4ss	4	13	-72.2	-68.7	-66.3	-67.9	0.29	-49.0	-41	7.74
HE40 STBC, M0 to M9 2ss	2	13	-72.2	-68.2			0.29	-53.5	-41	12.2
HE40 STBC, M0 to M9 2ss	3	13	-72.2	-68.5	-66.1		0.29	-50.2	-41	8.96
HE40 STBC, M0 to M9 2ss	4	13	-72.2	-68.7	-66.3	-67.9	0.29	-49.0	-41	7.74


Frequency 5320 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Tx 3 Spur Power (dBm)	Tx 4 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	13	-63.6				0.23	-50.4	-41	9.12
Non HT20, 6 to 54 Mbps	2	13	-72.2	-68.6			0.23	-53.8	-41	12.55
Non HT20, 6 to 54 Mbps	3	13	-75.1	-72.2	-70.9		0.23	-54.4	-41	13.15
Non HT20, 6 to 54 Mbps	4	13	-75.1	-72.5	-73.2	-72.5	0.23	-54.0	-41	12.7
Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-72.2	-68.6			0.23	-53.8	-41	12.55
Non HT20 Beam Forming, 6 to 54 Mbps	3	16	-75.1	-72.2	-70.9		0.23	-51.4	-41	10.15
Non HT20 Beam Forming, 6 to 54 Mbps	4	16	-75.1	-72.5	-73.2	-72.5	0.23	-51.0	-41	9.7
HT/VHT20, M0 to M7	1	13	-63.6				0.22	-50.4	-41	9.13
HT/VHT20, M0 to M7	2	13	-72.7	-68.4			0.22	-53.8	-41	12.56
HT/VHT20, M8 to M15	2	13	-72.7	-68.4			0.22	-53.8	-41	12.56
HT/VHT20, M0 to M7	3	13	-75.4	-72.1	-71.1		0.22	-54.5	-41	13.28
HT/VHT20, M8 to M15	3	13	-72.6	-69.2	-66.7		0.22	-50.9	-41	9.63
HT/VHT20, M16 to M23	3	13	-72.6	-69.2	-66.7		0.22	-50.9	-41	9.63
HT/VHT20, M0 to M7	4	13	-74.9	-72.3	-71.2	-71.0	0.22	-52.9	-41	11.61
HT/VHT20, M8 to M15	4	13	-72.4	-69.3	-67.0	-68.0	0.22	-49.5	-41	8.26
HT/VHT20, M16 to M23	4	13	-72.4	-69.3	-67.0	-68.0	0.22	-49.5	-41	8.26
HT/VHT20, M24 to M31	4	13	-72.4	-69.3	-67.0	-68.0	0.22	-49.5	-41	8.26
HT/VHT20 Beam Forming, M0 to M7	2	13	-72.7	-68.4			0.22	-53.8	-41	12.56
HT/VHT20 Beam Forming, M8 to M15	2	13	-72.7	-68.4			0.22	-53.8	-41	12.56
HT/VHT20 Beam Forming, M0 to M7	3	16	-75.4	-72.1	-71.1		0.22	-51.5	-41	10.28
HT/VHT20 Beam Forming, M8 to M15	3	13	-72.6	-69.2	-66.7		0.22	-50.9	-41	9.63
HT/VHT20 Beam Forming, M16 to M23	3	13	-72.6	-69.2	-66.7		0.22	-50.9	-41	9.63
HT/VHT20 Beam Forming, M0 to M7	4	16	-74.9	-72.3	-71.2	-71.0	0.22	-49.9	-41	8.61
HT/VHT20 Beam Forming, M8 to M15	4	13	-72.4	-69.3	-67.0	-68.0	0.22	-49.5	-41	8.26
HT/VHT20 Beam Forming, M16 to M23	4	13	-72.4	-69.3	-67.0	-68.0	0.22	-49.5	-41	8.26
HT/VHT20 Beam Forming, M24 to M31	4	13	-72.4	-69.3	-67.0	-68.0	0.22	-49.5	-41	8.26
HT/VHT20 STBC, M0 to M7	2	13	-72.7	-68.4			0.22	-53.8	-41	12.56
HT/VHT20 STBC, M0 to M7	3	13	-72.6	-69.2	-66.7		0.22	-50.9	-41	9.63
HT/VHT20 STBC, M0 to M7	4	13	-72.4	-69.3	-67.0	-68.0	0.22	-49.5	-41	8.26
HE20, M0 to M9 1ss	1	13	-63.2				0.22	-50.0	-41	8.73
HE20, M0 to M9 1ss	2	13	-72.0	-65.3			0.22	-51.2	-41	9.99
HE20, M0 to M9 2ss	2	13	-72.0	-65.3			0.22	-51.2	-41	9.99
HE20, M0 to M9 1ss	3	13	-75.0	-72.0	-70.8		0.22	-54.3	-41	13.03
HE20, M0 to M9 2ss	3	13	-72.4	-69.2	-66.5		0.22	-50.7	-41	9.49
HE20, M0 to M9 3ss	3	13	-72.4	-69.2	-66.5		0.22	-50.7	-41	9.49
HE20, M0 to M9 1ss	4	13	-75.0	-72.2	-71.2	-71.1	0.22	-52.9	-41	11.63


HE20, M0 to M9 2ss	4	13	-72.4	-69.2	-67.0	-67.8	0.22	-49.4	-41	8.18
HE20, M0 to M9 3ss	4	13	-72.4	-69.2	-67.0	-67.8	0.22	-49.4	-41	8.18
HE20, M0 to M9 4ss	4	13	-72.4	-69.2	-67.0	-67.8	0.22	-49.4	-41	8.18
HE20 Beam Forming, M0 to M9 1ss	2	13	-72.0	-65.3			0.22	-51.2	-41	9.99
HE20 Beam Forming, M0 to M9 2ss	2	13	-72.0	-65.3			0.22	-51.2	-41	9.99
HE20 Beam Forming, M0 to M9 1ss	3	16	-75.0	-72.0	-70.8		0.22	-51.3	-41	10.03
HE20 Beam Forming, M0 to M9 2ss	3	13	-72.4	-69.2	-66.5		0.22	-50.7	-41	9.49
HE20 Beam Forming, M0 to M9 3ss	3	13	-72.4	-69.2	-66.5		0.22	-50.7	-41	9.49
HE20 Beam Forming, M0 to M9 1ss	4	16	-75.0	-72.2	-71.2	-71.1	0.22	-49.9	-41	8.63
HE20 Beam Forming, M0 to M9 2ss	4	13	-72.4	-69.2	-67.0	-67.8	0.22	-49.4	-41	8.18
HE20 Beam Forming, M0 to M9 3ss	4	13	-72.4	-69.2	-67.0	-67.8	0.22	-49.4	-41	8.18
HE20 Beam Forming, M0 to M9 4ss	4	13	-72.4	-69.2	-67.0	-67.8	0.22	-49.4	-41	8.18
HE20 STBC, M0 to M9 2ss	2	13	-72.0	-65.3			0.22	-51.2	-41	9.99
HE20 STBC, M0 to M9 2ss	3	13	-72.4	-69.2	-66.5		0.22	-50.7	-41	9.49
HE20 STBC, M0 to M9 2ss	4	13	-72.4	-69.2	-67.0	-67.8	0.22	-49.4	-41	8.18

Data Screenshots

5310 MHz: HT/VHT40 Beam Forming, M0 to M7

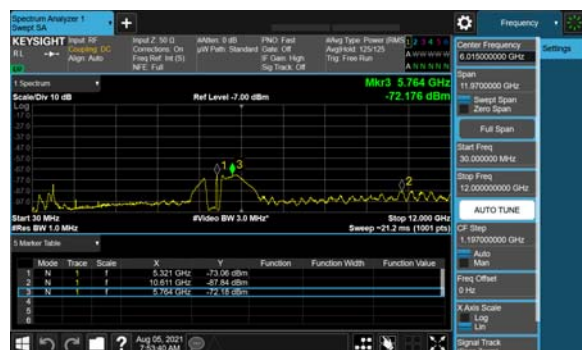

Antenna A

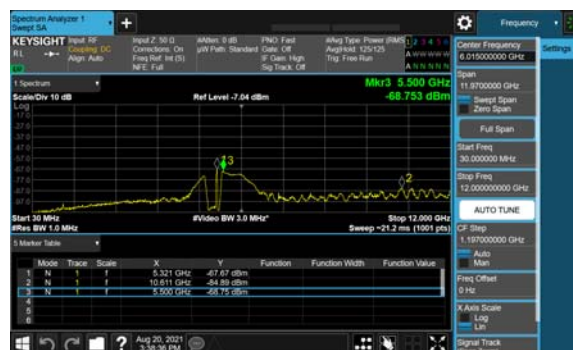


Antenna B



Antenna C

[illegible]

Antenna A

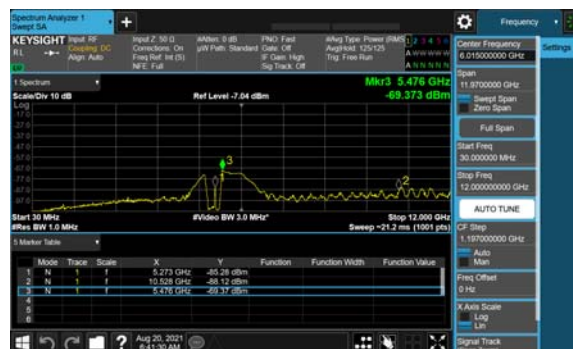

Antenna B



Antenna C

5270 MHz: HT/VHT40 Beam Forming, M0 to M7



Antenna A



Antenna B



Antenna C

Conducted Spurs Peak**Frequency 5260 MHz**

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Tx 3 Spur Power (dBm)	Tx 4 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	13	-56.8				0.23	-43.6	-27	16.57
Non HT20, 6 to 54 Mbps	2	13	-64.7	-61.2			0.23	-46.4	-27	19.37
Non HT20, 6 to 54 Mbps	3	13	-62.7	-63.6	-62.4		0.23	-44.9	-27	17.87
Non HT20, 6 to 54 Mbps	4	13	-65.8	-62.9	-63.7	-62.5	0.23	-44.3	-27	17.3
Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-64.7	-61.2			0.23	-46.4	-27	19.37
Non HT20 Beam Forming, 6 to 54 Mbps	3	16	-62.7	-63.6	-62.4		0.23	-41.9	-27	14.87
Non HT20 Beam Forming, 6 to 54 Mbps	4	16	-65.8	-62.9	-63.7	-62.5	0.23	-41.3	-27	14.3
HT/VHT20, M0 to M7	1	13	-56.1				0.22	-42.9	-27	15.88
HT/VHT20, M0 to M7	2	13	-63.5	-62.3			0.22	-46.6	-27	19.63
HT/VHT20, M8 to M15	2	13	-63.5	-62.3			0.22	-46.6	-27	19.63
HT/VHT20, M0 to M7	3	13	-63.0	-63.6	-62.6		0.22	-45.1	-27	18.06
HT/VHT20, M8 to M15	3	13	-65.1	-61.6	-59.9		0.22	-43.7	-27	16.72
HT/VHT20, M16 to M23	3	13	-65.1	-61.6	-59.9		0.22	-43.7	-27	16.72
HT/VHT20, M0 to M7	4	13	-62.5	-64.1	-63.0	-63.9	0.22	-44.1	-27	17.09
HT/VHT20, M8 to M15	4	13	-64.0	-62.0	-60.0	-60.4	0.22	-42.1	-27	15.1
HT/VHT20, M16 to M23	4	13	-64.0	-62.0	-60.0	-60.4	0.22	-42.1	-27	15.1
HT/VHT20, M24 to M31	4	13	-64.0	-62.0	-60.0	-60.4	0.22	-42.1	-27	15.1
HT/VHT20 Beam Forming, M0 to M7	2	13	-63.5	-62.3			0.22	-46.6	-27	19.63
HT/VHT20 Beam Forming, M8 to M15	2	13	-63.5	-62.3			0.22	-46.6	-27	19.63
HT/VHT20 Beam Forming, M0 to M7	3	16	-63.0	-63.6	-62.6		0.22	-42.1	-27	15.06
HT/VHT20 Beam Forming, M8 to M15	3	13	-65.1	-61.6	-59.9		0.22	-43.7	-27	16.72
HT/VHT20 Beam Forming, M16 to M23	3	13	-65.1	-61.6	-59.9		0.22	-43.7	-27	16.72
HT/VHT20 Beam Forming, M0 to M7	4	16	-62.5	-64.1	-63.0	-63.9	0.22	-41.1	-27	14.09
HT/VHT20 Beam Forming, M8 to M15	4	13	-64.0	-62.0	-60.0	-60.4	0.22	-42.1	-27	15.1
HT/VHT20 Beam Forming, M16 to M23	4	13	-64.0	-62.0	-60.0	-60.4	0.22	-42.1	-27	15.1
HT/VHT20 Beam Forming, M24 to M31	4	13	-64.0	-62.0	-60.0	-60.4	0.22	-42.1	-27	15.1
HT/VHT20 STBC, M0 to M7	2	13	-63.5	-62.3			0.22	-46.6	-27	19.63
HT/VHT20 STBC, M0 to M7	3	13	-65.1	-61.6	-59.9		0.22	-43.7	-27	16.72
HT/VHT20 STBC, M0 to M7	4	13	-64.0	-62.0	-60.0	-60.4	0.22	-42.1	-27	15.1
HE20, M0 to M9 1ss	1	13	-56.2				0.22	-43.0	-27	15.98
HE20, M0 to M9 1ss	2	13	-64.0	-59.2			0.22	-44.7	-27	17.74
HE20, M0 to M9 2ss	2	13	-64.0	-59.2			0.22	-44.7	-27	17.74
HE20, M0 to M9 1ss	3	13	-63.3	-63.3	-63.1		0.22	-45.2	-27	18.24
HE20, M0 to M9 2ss	3	13	-64.6	-62.1	-59.3		0.22	-43.5	-27	16.48

HE20, M0 to M9 3ss	3	13	-64.6	-62.1	-59.3		0.22	-43.5	-27	16.48
HE20, M0 to M9 1ss	4	13	-63.3	-63.2	-62.2	-63.5	0.22	-43.8	-27	16.78
HE20, M0 to M9 2ss	4	13	-64.4	-62.7	-59.6	-60.0	0.22	-42.0	-27	15.02
HE20, M0 to M9 3ss	4	13	-64.4	-62.7	-59.6	-60.0	0.22	-42.0	-27	15.02
HE20, M0 to M9 4ss	4	13	-64.4	-62.7	-59.6	-60.0	0.22	-42.0	-27	15.02
HE20 Beam Forming, M0 to M9 1ss	2	13	-64.0	-59.2			0.22	-44.7	-27	17.74
HE20 Beam Forming, M0 to M9 2ss	2	13	-64.0	-59.2			0.22	-44.7	-27	17.74
HE20 Beam Forming, M0 to M9 1ss	3	16	-63.3	-63.3	-63.1		0.22	-42.2	-27	15.24
HE20 Beam Forming, M0 to M9 2ss	3	13	-64.6	-62.1	-59.3		0.22	-43.5	-27	16.48
HE20 Beam Forming, M0 to M9 3ss	3	13	-64.6	-62.1	-59.3		0.22	-43.5	-27	16.48
HE20 Beam Forming, M0 to M9 1ss	4	16	-63.3	-63.2	-62.2	-63.5	0.22	-40.8	-27	13.78
HE20 Beam Forming, M0 to M9 2ss	4	13	-64.4	-62.7	-59.6	-60.0	0.22	-42.0	-27	15.02
HE20 Beam Forming, M0 to M9 3ss	4	13	-64.4	-62.7	-59.6	-60.0	0.22	-42.0	-27	15.02
HE20 Beam Forming, M0 to M9 4ss	4	13	-64.4	-62.7	-59.6	-60.0	0.22	-42.0	-27	15.02
HE20 STBC, M0 to M9 2ss	2	13	-64.0	-59.2			0.22	-44.7	-27	17.74
HE20 STBC, M0 to M9 2ss	3	13	-64.6	-62.1	-59.3		0.22	-43.5	-27	16.48
HE20 STBC, M0 to M9 2ss	4	13	-64.4	-62.7	-59.6	-60.0	0.22	-42.0	-27	15.02

Frequency 5270 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Tx 3 Spur Power (dBm)	Tx 4 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT40, 6 to 54 Mbps	1	13	-54.4				0.34	-41.1	-27	14.06
Non HT40, 6 to 54 Mbps	2	13	-60.4	-56.9			0.34	-42.0	-27	14.96
Non HT40, 6 to 54 Mbps	3	13	-64.4	-61.5	-59.6		0.34	-43.3	-27	16.3
Non HT40, 6 to 54 Mbps	4	13	-64.6	-61.5	-59.6	-60.7	0.34	-41.9	-27	14.89
HT/VHT40, M0 to M7	1	13	-54.8				0.32	-41.5	-27	14.48
HT/VHT40, M0 to M7	2	13	-60.3	-57.7			0.32	-42.5	-27	15.48
HT/VHT40, M8 to M15	2	13	-60.3	-57.7			0.32	-42.5	-27	15.48
HT/VHT40, M0 to M7	3	13	-64.4	-61.2	-59.7		0.32	-43.3	-27	16.27
HT/VHT40, M8 to M15	3	13	-64.0	-62.3	-60.2		0.32	-43.8	-27	16.8
HT/VHT40, M16 to M23	3	13	-64.0	-62.3	-60.2		0.32	-43.8	-27	16.8
HT/VHT40, M0 to M7	4	13	-63.9	-61.7	-60.6	-61.0	0.32	-42.3	-27	15.29
HT/VHT40, M8 to M15	4	13	-65.0	-61.2	-60.3	-61.7	0.32	-42.4	-27	15.39
HT/VHT40, M16 to M23	4	13	-65.0	-61.2	-60.3	-61.7	0.32	-42.4	-27	15.39
HT/VHT40, M24 to M31	4	13	-65.0	-61.2	-60.3	-61.7	0.32	-42.4	-27	15.39
HT/VHT40 Beam Forming, M0 to M7	2	13	-60.3	-57.7			0.32	-42.5	-27	15.48
HT/VHT40 Beam Forming, M8 to M15	2	13	-60.3	-57.7			0.32	-42.5	-27	15.48
HT/VHT40 Beam Forming, M0 to M7	3	16	-64.4	-61.2	-59.7		0.32	-40.3	-27	13.27

HT/VHT40 Beam Forming, M8 to M15	3	13	-64.0	-62.3	-60.2		0.32	-43.8	-27	16.8
HT/VHT40 Beam Forming, M16 to M23	3	13	-64.0	-62.3	-60.2		0.32	-43.8	-27	16.8
HT/VHT40 Beam Forming, M0 to M7	4	16	-67.2	-63.1	-62.9	-63.4	0.32	-41.5	-27	14.5
HT/VHT40 Beam Forming, M8 to M15	4	13	-65.0	-61.2	-60.3	-61.7	0.32	-42.4	-27	15.39
HT/VHT40 Beam Forming, M16 to M23	4	13	-65.0	-61.2	-60.3	-61.7	0.32	-42.4	-27	15.39
HT/VHT40 Beam Forming, M24 to M31	4	13	-65.0	-61.2	-60.3	-61.7	0.32	-42.4	-27	15.39
HT/VHT40 STBC, M0 to M7	2	13	-60.3	-57.7			0.32	-42.5	-27	15.48
HT/VHT40 STBC, M0 to M7	3	13	-64.0	-62.3	-60.2		0.32	-43.8	-27	16.8
HT/VHT40 STBC, M0 to M7	4	13	-65.0	-61.2	-60.3	-61.7	0.32	-42.4	-27	15.39
HE40, M0 to M9 1ss	1	13	-54.7				0.29	-41.4	-27	14.41
HE40, M0 to M9 1ss	2	13	-60.0	-56.6			0.29	-41.7	-27	14.68
HE40, M0 to M9 2ss	2	13	-60.0	-56.6			0.29	-41.7	-27	14.68
HE40, M0 to M9 1ss	3	13	-63.9	-62.4	-57.8		0.29	-42.5	-27	15.49
HE40, M0 to M9 2ss	3	13	-65.2	-60.0	-56.6		0.29	-41.3	-27	14.28
HE40, M0 to M9 3ss	3	13	-65.2	-60.0	-56.6		0.29	-41.3	-27	14.28
HE40, M0 to M9 1ss	4	13	-64.3	-61.2	-60.1	-60.8	0.29	-42.0	-27	15.03
HE40, M0 to M9 2ss	4	13	-63.0	-61.4	-59.1	-61.0	0.29	-41.6	-27	14.59
HE40, M0 to M9 3ss	4	13	-63.0	-61.4	-59.1	-61.0	0.29	-41.6	-27	14.59
HE40, M0 to M9 4ss	4	13	-63.0	-61.4	-59.1	-61.0	0.29	-41.6	-27	14.59
HE40 Beam Forming, M0 to M9 1ss	2	13	-60.0	-56.6			0.29	-41.7	-27	14.68
HE40 Beam Forming, M0 to M9 2ss	2	13	-60.0	-56.6			0.29	-41.7	-27	14.68
HE40 Beam Forming, M0 to M9 1ss	3	16	-64.3	-61.2	-60.1		0.29	-40.5	-27	13.47
HE40 Beam Forming, M0 to M9 2ss	3	13	-65.2	-60.0	-56.6		0.29	-41.3	-27	14.28
HE40 Beam Forming, M0 to M9 3ss	3	13	-65.2	-60.0	-56.6		0.29	-41.3	-27	14.28
HE40 Beam Forming, M0 to M9 1ss	4	16	-63.1	-63.6	-62.8	-63.4	0.29	-40.9	-27	13.9
HE40 Beam Forming, M0 to M9 2ss	4	13	-63.0	-61.4	-59.1	-61.0	0.29	-41.6	-27	14.59
HE40 Beam Forming, M0 to M9 3ss	4	13	-63.0	-61.4	-59.1	-61.0	0.29	-41.6	-27	14.59
HE40 Beam Forming, M0 to M9 4ss	4	13	-63.0	-61.4	-59.1	-61.0	0.29	-41.6	-27	14.59
HE40 STBC, M0 to M9 2ss	2	13	-60.0	-56.6			0.29	-41.7	-27	14.68
HE40 STBC, M0 to M9 2ss	3	13	-65.2	-60.0	-56.6		0.29	-41.3	-27	14.28
HE40 STBC, M0 to M9 2ss	4	13	-63.0	-61.4	-59.1	-61.0	0.29	-41.6	-27	14.59

Frequency 5280 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Tx 3 Spur Power (dBm)	Tx 4 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	13	-57.1				0.23	-43.9	-27	16.87
Non HT20, 6 to 54 Mbps	2	13	-64.0	-62.9			0.23	-47.2	-27	20.17
Non HT20, 6 to 54 Mbps	3	13	-64.2	-63.1	-62.3		0.23	-45.1	-27	18.13
Non HT20, 6 to 54 Mbps	4	13	-65.1	-62.3	-63.3	-66.3	0.23	-44.7	-27	17.73
Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-64.0	-62.9			0.23	-47.2	-27	20.17
Non HT20 Beam Forming, 6 to 54 Mbps	3	16	-64.2	-63.1	-62.3		0.23	-42.1	-27	15.13
Non HT20 Beam Forming, 6 to 54 Mbps	4	16	-65.1	-62.3	-63.3	-66.3	0.23	-41.7	-27	14.73
HT/VHT20, M0 to M7	1	13	-57.1				0.22	-43.9	-27	16.88
HT/VHT20, M0 to M7	2	13	-63.8	-63.2			0.22	-47.3	-27	20.26
HT/VHT20, M8 to M15	2	13	-63.8	-63.2			0.22	-47.3	-27	20.26
HT/VHT20, M0 to M7	3	13	-64.3	-63.0	-63.7		0.22	-45.6	-27	18.64
HT/VHT20, M8 to M15	3	13	-64.3	-61.4	-60.6		0.22	-43.8	-27	16.84
HT/VHT20, M16 to M23	3	13	-64.3	-61.4	-60.6		0.22	-43.8	-27	16.84
HT/VHT20, M0 to M7	4	13	-64.4	-63.5	-63.4	-63.1	0.22	-44.3	-27	17.33
HT/VHT20, M8 to M15	4	13	-64.7	-61.6	-60.4	-61.7	0.22	-42.6	-27	15.6
HT/VHT20, M16 to M23	4	13	-64.7	-61.6	-60.4	-61.7	0.22	-42.6	-27	15.6
HT/VHT20, M24 to M31	4	13	-64.7	-61.6	-60.4	-61.7	0.22	-42.6	-27	15.6
HT/VHT20 Beam Forming, M0 to M7	2	13	-63.8	-63.2			0.22	-47.3	-27	20.26
HT/VHT20 Beam Forming, M8 to M15	2	13	-63.8	-63.2			0.22	-47.3	-27	20.26
HT/VHT20 Beam Forming, M0 to M7	3	16	-64.3	-63.0	-63.7		0.22	-42.6	-27	15.64
HT/VHT20 Beam Forming, M8 to M15	3	13	-64.3	-61.4	-60.6		0.22	-43.8	-27	16.84
HT/VHT20 Beam Forming, M16 to M23	3	13	-64.3	-61.4	-60.6		0.22	-43.8	-27	16.84
HT/VHT20 Beam Forming, M0 to M7	4	16	-64.4	-63.5	-63.4	-63.1	0.22	-41.3	-27	14.33
HT/VHT20 Beam Forming, M8 to M15	4	13	-64.7	-61.6	-60.4	-61.7	0.22	-42.6	-27	15.6
HT/VHT20 Beam Forming, M16 to M23	4	13	-64.7	-61.6	-60.4	-61.7	0.22	-42.6	-27	15.6
HT/VHT20 Beam Forming, M24 to M31	4	13	-64.7	-61.6	-60.4	-61.7	0.22	-42.6	-27	15.6
HT/VHT20 STBC, M0 to M7	2	13	-63.8	-63.2			0.22	-47.3	-27	20.26
HT/VHT20 STBC, M0 to M7	3	13	-64.3	-61.4	-60.6		0.22	-43.8	-27	16.84
HT/VHT20 STBC, M0 to M7	4	13	-64.7	-61.6	-60.4	-61.7	0.22	-42.6	-27	15.6
HE20, M0 to M9 1ss	1	13	-57.2				0.22	-44.0	-27	16.98
HE20, M0 to M9 1ss	2	13	-64.6	-62.4			0.22	-47.1	-27	20.13
HE20, M0 to M9 2ss	2	13	-64.6	-62.4			0.22	-47.1	-27	20.13
HE20, M0 to M9 1ss	3	13	-64.1	-62.5	-62.5		0.22	-45.0	-27	17.98
HE20, M0 to M9 2ss	3	13	-64.4	-61.9	-60.2		0.22	-43.9	-27	16.85
HE20, M0 to M9 3ss	3	13	-64.4	-61.9	-60.2		0.22	-43.9	-27	16.85
HE20, M0 to M9 1ss	4	13	-64.8	-63.7	-63.2	-63.5	0.22	-44.5	-27	17.52

HE20, M0 to M9 2ss	4	13	-64.9	-62.8	-60.5	-59.7	0.22	-42.3	-27	15.29
HE20, M0 to M9 3ss	4	13	-64.9	-62.8	-60.5	-59.7	0.22	-42.3	-27	15.29
HE20, M0 to M9 4ss	4	13	-64.9	-62.8	-60.5	-59.7	0.22	-42.3	-27	15.29
HE20 Beam Forming, M0 to M9 1ss	2	13	-64.6	-62.4			0.22	-47.1	-27	20.13
HE20 Beam Forming, M0 to M9 2ss	2	13	-64.6	-62.4			0.22	-47.1	-27	20.13
HE20 Beam Forming, M0 to M9 1ss	3	16	-64.1	-62.5	-62.5		0.22	-42.0	-27	14.98
HE20 Beam Forming, M0 to M9 2ss	3	13	-64.4	-61.9	-60.2		0.22	-43.9	-27	16.85
HE20 Beam Forming, M0 to M9 3ss	3	13	-64.4	-61.9	-60.2		0.22	-43.9	-27	16.85
HE20 Beam Forming, M0 to M9 1ss	4	16	-64.8	-63.7	-63.2	-63.5	0.22	-41.5	-27	14.52
HE20 Beam Forming, M0 to M9 2ss	4	13	-64.9	-62.8	-60.5	-59.7	0.22	-42.3	-27	15.29
HE20 Beam Forming, M0 to M9 3ss	4	13	-64.9	-62.8	-60.5	-59.7	0.22	-42.3	-27	15.29
HE20 Beam Forming, M0 to M9 4ss	4	13	-64.9	-62.8	-60.5	-59.7	0.22	-42.3	-27	15.29
HE20 STBC, M0 to M9 2ss	2	13	-64.6	-62.4			0.22	-47.1	-27	20.13
HE20 STBC, M0 to M9 2ss	3	13	-64.4	-61.9	-60.2		0.22	-43.9	-27	16.85
HE20 STBC, M0 to M9 2ss	4	13	-64.9	-62.8	-60.5	-59.7	0.22	-42.3	-27	15.29

Frequency 5290 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Tx 3 Spur Power (dBm)	Tx 4 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT80, 6 to 54 Mbps	1	13	-59.3				0.28	-46.0	-27	19.02
Non HT80, 6 to 54 Mbps	2	13	-64.7	-62.2			0.28	-47.0	-27	19.98
Non HT80, 6 to 54 Mbps	3	13	-63.5	-62.1	-60.6		0.28	-43.9	-27	16.85
Non HT80, 6 to 54 Mbps	4	13	-63.5	-62.1	-60.6	-60.4	0.28	-42.2	-27	15.18
VHT80, M0 to M9 1ss	1	13	-59.4				0.35	-46.1	-27	19.05
VHT80, M0 to M9 1ss	2	13	-64.0	-62.1			0.33	-46.6	-27	19.61
VHT80, M0 to M9 2ss	2	13	-64.0	-62.1			0.33	-46.6	-27	19.61
VHT80, M0 to M9 1ss	3	13	-64.6	-61.6	-59.7		0.33	-43.4	-27	16.43
VHT80, M0 to M9 2ss	3	13	-64.6	-61.6	-59.7		0.33	-43.4	-27	16.43
VHT80, M0 to M9 3ss	3	13	-64.6	-61.6	-59.7		0.33	-43.4	-27	16.43
VHT80, M0 to M9 1ss	4	13	-63.9	-61.5	-59.3	-60.4	0.33	-41.6	-27	14.61
VHT80, M0 to M9 2ss	4	13	-63.9	-61.5	-59.3	-60.4	0.33	-41.6	-27	14.61
VHT80, M0 to M9 3ss	4	13	-63.9	-61.5	-59.3	-60.4	0.33	-41.6	-27	14.61
VHT80, M0 to M9 4ss	4	13	-63.9	-61.5	-59.3	-60.4	0.33	-41.6	-27	14.61
VHT80 Beam Forming, M0 to M9 1ss	2	13	-64.0	-62.1			0.33	-46.6	-27	19.61
VHT80 Beam Forming, M0 to M9 2ss	2	13	-64.0	-62.1			0.33	-46.6	-27	19.61
VHT80 Beam Forming, M0 to M9 1ss	3	16	-63.6	-62.9	-63.0		0.33	-42.1	-27	15.05
VHT80 Beam Forming, M0 to M9 2ss	3	13	-64.6	-61.6	-59.7		0.33	-43.4	-27	16.43

VHT80 Beam Forming, M0 to M9 3ss	3	13	-64.6	-61.6	-59.7		0.33	-43.4	-27	16.43
VHT80 Beam Forming, M0 to M9 1ss	4	16	-64.6	-62.9	-63.4	-63.0	0.33	-41.1	-27	14.07
VHT80 Beam Forming, M0 to M9 2ss	4	13	-63.9	-61.5	-59.3	-60.4	0.33	-41.6	-27	14.61
VHT80 Beam Forming, M0 to M9 3ss	4	13	-63.9	-61.5	-59.3	-60.4	0.33	-41.6	-27	14.61
VHT80 Beam Forming, M0 to M9 4ss	4	13	-63.9	-61.5	-59.3	-60.4	0.33	-41.6	-27	14.61
VHT80 STBC, M0 to M9 1ss	2	13	-64.0	-62.1			0.33	-46.6	-27	19.61
VHT80 STBC, M0 to M9 1ss	3	13	-64.6	-61.6	-59.7		0.33	-43.4	-27	16.43
VHT80 STBC, M0 to M9 1ss	4	13	-63.9	-61.5	-59.3	-60.4	0.33	-41.6	-27	14.61
HE80, M0 to M9 1ss	1	13	-54.8				0.23	-41.6	-27	14.57
HE80, M0 to M9 1ss	2	13	-63.8	-61.1			0.23	-46.0	-27	19.0
HE80, M0 to M9 2ss	2	13	-63.8	-61.1			0.23	-46.0	-27	19.0
HE80, M0 to M9 1ss	3	13	-64.5	-62.2	-60.9		0.23	-44.3	-27	17.29
HE80, M0 to M9 2ss	3	13	-64.5	-62.2	-60.9		0.23	-44.3	-27	17.29
HE80, M0 to M9 3ss	3	13	-64.5	-62.2	-60.9		0.23	-44.3	-27	17.29
HE80, M0 to M9 1ss	4	13	-64.0	-60.3	-60.1	-61.5	0.23	-42.0	-27	14.97
HE80, M0 to M9 2ss	4	13	-64.0	-60.3	-60.1	-61.5	0.23	-42.0	-27	14.97
HE80, M0 to M9 3ss	4	13	-64.0	-60.3	-60.1	-61.5	0.23	-42.0	-27	14.97
HE80, M0 to M9 4ss	4	13	-64.0	-60.3	-60.1	-61.5	0.23	-42.0	-27	14.97
HE80 Beam Forming, M0 to M9 1ss	2	13	-63.8	-61.1			0.23	-46.0	-27	19.0
HE80 Beam Forming, M0 to M9 2ss	2	13	-63.8	-61.1			0.23	-46.0	-27	19.0
HE80 Beam Forming, M0 to M9 1ss	3	16	-64.4	-62.8	-63.2		0.23	-42.4	-27	15.41
HE80 Beam Forming, M0 to M9 2ss	3	13	-64.5	-62.2	-60.9		0.23	-44.3	-27	17.29
HE80 Beam Forming, M0 to M9 3ss	3	13	-64.5	-62.2	-60.9		0.23	-44.3	-27	17.29
HE80 Beam Forming, M0 to M9 1ss	4	16	-64.4	-62.8	-63.2	-62.8	0.23	-41.0	-27	14.0
HE80 Beam Forming, M0 to M9 2ss	4	13	-64.0	-60.3	-60.1	-61.5	0.23	-42.0	-27	14.97
HE80 Beam Forming, M0 to M9 3ss	4	13	-64.0	-60.3	-60.1	-61.5	0.23	-42.0	-27	14.97
HE80 Beam Forming, M0 to M9 4ss	4	13	-64.0	-60.3	-60.1	-61.5	0.23	-42.0	-27	14.97
HE80 STBC, M0 to M9 1ss	2	13	-63.8	-61.1			0.23	-46.0	-27	19.0
HE80 STBC, M0 to M9 1ss	3	13	-64.5	-62.2	-60.9		0.23	-44.3	-27	17.29
HE80 STBC, M0 to M9 1ss	4	13	-64.0	-60.3	-60.1	-61.5	0.23	-42.0	-27	14.97

Frequency 5300 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Tx 3 Spur Power (dBm)	Tx 4 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	13	-56.2				0.23	-43.0	-27	15.97
Non HT20, 6 to 54 Mbps	2	13	-63.8	-59.0			0.23	-44.5	-27	17.53
Non HT20, 6 to 54 Mbps	3	13	-64.1	-63.2	-63.5		0.23	-45.6	-27	18.58
Non HT20, 6 to 54 Mbps	4	13	-63.6	-63.2	-62.7	-65.3	0.23	-44.3	-27	17.35
Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-63.8	-59.0			0.23	-44.5	-27	17.53
Non HT20 Beam Forming, 6 to 54 Mbps	3	16	-64.1	-63.2	-63.5		0.23	-42.6	-27	15.58
Non HT20 Beam Forming, 6 to 54 Mbps	4	16	-63.6	-63.2	-62.7	-65.3	0.23	-41.3	-27	14.35
HT/VHT20, M0 to M7	1	13	-57.8				0.22	-44.6	-27	17.58
HT/VHT20, M0 to M7	2	13	-64.2	-57.4			0.22	-43.4	-27	16.36
HT/VHT20, M8 to M15	2	13	-64.2	-57.4			0.22	-43.4	-27	16.36
HT/VHT20, M0 to M7	3	13	-63.0	-63.5	-62.7		0.22	-45.1	-27	18.06
HT/VHT20, M8 to M15	3	13	-64.9	-61.7	-60.5		0.22	-44.0	-27	17.01
HT/VHT20, M16 to M23	3	13	-64.9	-61.7	-60.5		0.22	-44.0	-27	17.01
HT/VHT20, M0 to M7	4	13	-64.1	-62.5	-62.2	-63.6	0.22	-43.8	-27	16.79
HT/VHT20, M8 to M15	4	13	-63.9	-62.1	-59.9	-60.0	0.22	-41.9	-27	14.94
HT/VHT20, M16 to M23	4	13	-63.9	-62.1	-59.9	-60.0	0.22	-41.9	-27	14.94
HT/VHT20, M24 to M31	4	13	-63.9	-62.1	-59.9	-60.0	0.22	-41.9	-27	14.94
HT/VHT20 Beam Forming, M0 to M7	2	13	-64.2	-57.4			0.22	-43.4	-27	16.36
HT/VHT20 Beam Forming, M8 to M15	2	13	-64.2	-57.4			0.22	-43.4	-27	16.36
HT/VHT20 Beam Forming, M0 to M7	3	16	-63.0	-63.5	-62.7		0.22	-42.1	-27	15.06
HT/VHT20 Beam Forming, M8 to M15	3	13	-64.9	-61.7	-60.5		0.22	-44.0	-27	17.01
HT/VHT20 Beam Forming, M16 to M23	3	13	-64.9	-61.7	-60.5		0.22	-44.0	-27	17.01
HT/VHT20 Beam Forming, M0 to M7	4	16	-64.1	-62.5	-62.2	-63.6	0.22	-40.8	-27	13.79
HT/VHT20 Beam Forming, M8 to M15	4	13	-63.9	-62.1	-59.9	-60.0	0.22	-41.9	-27	14.94
HT/VHT20 Beam Forming, M16 to M23	4	13	-63.9	-62.1	-59.9	-60.0	0.22	-41.9	-27	14.94
HT/VHT20 Beam Forming, M24 to M31	4	13	-63.9	-62.1	-59.9	-60.0	0.22	-41.9	-27	14.94
HT/VHT20 STBC, M0 to M7	2	13	-64.2	-57.4			0.22	-43.4	-27	16.36
HT/VHT20 STBC, M0 to M7	3	13	-64.9	-61.7	-60.5		0.22	-44.0	-27	17.01
HT/VHT20 STBC, M0 to M7	4	13	-63.9	-62.1	-59.9	-60.0	0.22	-41.9	-27	14.94
HE20, M0 to M9 1ss	1	13	-56.9				0.22	-43.7	-27	16.68
HE20, M0 to M9 1ss	2	13	-64.7	-59.1			0.22	-44.8	-27	17.83
HE20, M0 to M9 2ss	2	13	-64.7	-59.1			0.22	-44.8	-27	17.83
HE20, M0 to M9 1ss	3	13	-63.9	-63.5	-63.3		0.22	-45.6	-27	18.57
HE20, M0 to M9 2ss	3	13	-64.2	-62.5	-60.7		0.22	-44.2	-27	17.24
HE20, M0 to M9 3ss	3	13	-64.2	-62.5	-60.7		0.22	-44.2	-27	17.24
HE20, M0 to M9 1ss	4	13	-64.6	-63.1	-62.4	-63.7	0.22	-44.1	-27	17.14

HE20, M0 to M9 2ss	4	13	-64.4	-61.6	-59.5	-60.2	0.22	-41.8	-27	14.82
HE20, M0 to M9 3ss	4	13	-64.4	-61.6	-59.5	-60.2	0.22	-41.8	-27	14.82
HE20, M0 to M9 4ss	4	13	-64.4	-61.6	-59.5	-60.2	0.22	-41.8	-27	14.82
HE20 Beam Forming, M0 to M9 1ss	2	13	-64.7	-59.1			0.22	-44.8	-27	17.83
HE20 Beam Forming, M0 to M9 2ss	2	13	-64.7	-59.1			0.22	-44.8	-27	17.83
HE20 Beam Forming, M0 to M9 1ss	3	16	-63.9	-63.5	-63.3		0.22	-42.6	-27	15.57
HE20 Beam Forming, M0 to M9 2ss	3	13	-64.2	-62.5	-60.7		0.22	-44.2	-27	17.24
HE20 Beam Forming, M0 to M9 3ss	3	13	-64.2	-62.5	-60.7		0.22	-44.2	-27	17.24
HE20 Beam Forming, M0 to M9 1ss	4	16	-64.6	-63.1	-62.4	-63.7	0.22	-41.1	-27	14.14
HE20 Beam Forming, M0 to M9 2ss	4	13	-64.4	-61.6	-59.5	-60.2	0.22	-41.8	-27	14.82
HE20 Beam Forming, M0 to M9 3ss	4	13	-64.4	-61.6	-59.5	-60.2	0.22	-41.8	-27	14.82
HE20 Beam Forming, M0 to M9 4ss	4	13	-64.4	-61.6	-59.5	-60.2	0.22	-41.8	-27	14.82
HE20 STBC, M0 to M9 2ss	2	13	-64.7	-59.1			0.22	-44.8	-27	17.83
HE20 STBC, M0 to M9 2ss	3	13	-64.2	-62.5	-60.7		0.22	-44.2	-27	17.24
HE20 STBC, M0 to M9 2ss	4	13	-64.4	-61.6	-59.5	-60.2	0.22	-41.8	-27	14.82

Frequency 5310 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Tx 3 Spur Power (dBm)	Tx 4 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT40, 6 to 54 Mbps	1	13	-60.2				0.34	-46.9	-27	19.86
Non HT40, 6 to 54 Mbps	2	13	-64.5	-61.9			0.34	-46.7	-27	19.66
Non HT40, 6 to 54 Mbps	3	13	-62.2	-62.5	-61.1		0.34	-43.8	-27	16.78
Non HT40, 6 to 54 Mbps	4	13	-66.8	-63.1	-63.0	-63.7	0.34	-44.5	-27	17.55
HT/VHT40, M0 to M7	1	13	-56.5				0.32	-43.2	-27	16.18
HT/VHT40, M0 to M7	2	13	-63.8	-61.5			0.32	-46.2	-27	19.17
HT/VHT40, M8 to M15	2	13	-63.8	-61.5			0.32	-46.2	-27	19.17
HT/VHT40, M0 to M7	3	13	-61.1	-61.9	-60.3		0.32	-43.0	-27	15.96
HT/VHT40, M8 to M15	3	13	-64.7	-61.5	-59.3		0.32	-43.2	-27	16.21
HT/VHT40, M16 to M23	3	13	-64.7	-61.5	-59.3		0.32	-43.2	-27	16.21
HT/VHT40, M0 to M7	4	13	-64.4	-61.8	-59.6	-60.3	0.32	-41.8	-27	14.83
HT/VHT40, M8 to M15	4	13	-64.4	-61.8	-59.6	-60.3	0.32	-41.8	-27	14.83
HT/VHT40, M16 to M23	4	13	-64.4	-61.8	-59.6	-60.3	0.32	-41.8	-27	14.83
HT/VHT40, M24 to M31	4	13	-64.4	-61.8	-59.6	-60.3	0.32	-41.8	-27	14.83
HT/VHT40 Beam Forming, M0 to M7	2	13	-63.8	-61.5			0.32	-46.2	-27	19.17
HT/VHT40 Beam Forming, M8 to M15	2	13	-63.8	-61.5			0.32	-46.2	-27	19.17
HT/VHT40 Beam Forming, M0 to M7	3	16	-64.4	-61.8	-59.6		0.32	-40.4	-27	13.42
HT/VHT40 Beam Forming, M8 to M15	3	13	-64.7	-61.5	-59.3		0.32	-43.2	-27	16.21

HT/VHT40 Beam Forming, M16 to M23	3	13	-64.7	-61.5	-59.3		0.32	-43.2	-27	16.21
HT/VHT40 Beam Forming, M0 to M7	4	16	-64.1	-62.7	-63.0	-63.5	0.32	-41.0	-27	13.95
HT/VHT40 Beam Forming, M8 to M15	4	13	-64.4	-61.8	-59.6	-60.3	0.32	-41.8	-27	14.83
HT/VHT40 Beam Forming, M16 to M23	4	13	-64.4	-61.8	-59.6	-60.3	0.32	-41.8	-27	14.83
HT/VHT40 Beam Forming, M24 to M31	4	13	-64.4	-61.8	-59.6	-60.3	0.32	-41.8	-27	14.83
HT/VHT40 STBC, M0 to M7	2	13	-63.8	-61.5			0.32	-46.2	-27	19.17
HT/VHT40 STBC, M0 to M7	3	13	-64.7	-61.5	-59.3		0.32	-43.2	-27	16.21
HT/VHT40 STBC, M0 to M7	4	13	-64.4	-61.8	-59.6	-60.3	0.32	-41.8	-27	14.83
HE40, M0 to M9 1ss	1	13	-56.2				0.29	-42.9	-27	15.91
HE40, M0 to M9 1ss	2	13	-64.6	-62.0			0.29	-46.8	-27	19.81
HE40, M0 to M9 2ss	2	13	-64.6	-62.0			0.29	-46.8	-27	19.81
HE40, M0 to M9 1ss	3	13	-64.9	-62.1	-59.7		0.29	-43.7	-27	16.67
HE40, M0 to M9 2ss	3	13	-64.9	-62.1	-59.7		0.29	-43.7	-27	16.67
HE40, M0 to M9 3ss	3	13	-64.9	-62.1	-59.7		0.29	-43.7	-27	16.67
HE40, M0 to M9 1ss	4	13	-64.4	-62.1	-60.1	-60.1	0.29	-42.0	-27	15.04
HE40, M0 to M9 2ss	4	13	-64.4	-62.1	-60.1	-60.1	0.29	-42.0	-27	15.04
HE40, M0 to M9 3ss	4	13	-64.4	-62.1	-60.1	-60.1	0.29	-42.0	-27	15.04
HE40, M0 to M9 4ss	4	13	-64.4	-62.1	-60.1	-60.1	0.29	-42.0	-27	15.04
HE40 Beam Forming, M0 to M9 1ss	2	13	-64.6	-62.0			0.29	-46.8	-27	19.81
HE40 Beam Forming, M0 to M9 2ss	2	13	-64.6	-62.0			0.29	-46.8	-27	19.81
HE40 Beam Forming, M0 to M9 1ss	3	16	-64.4	-62.4	-63.4		0.29	-42.3	-27	15.26
HE40 Beam Forming, M0 to M9 2ss	3	13	-64.9	-62.1	-59.7		0.29	-43.7	-27	16.67
HE40 Beam Forming, M0 to M9 3ss	3	13	-64.9	-62.1	-59.7		0.29	-43.7	-27	16.67
HE40 Beam Forming, M0 to M9 1ss	4	16	-63.6	-63.8	-63.2	-62.1	0.29	-40.8	-27	13.81
HE40 Beam Forming, M0 to M9 2ss	4	13	-64.4	-62.1	-60.1	-60.1	0.29	-42.0	-27	15.04
HE40 Beam Forming, M0 to M9 3ss	4	13	-64.4	-62.1	-60.1	-60.1	0.29	-42.0	-27	15.04
HE40 Beam Forming, M0 to M9 4ss	4	13	-64.4	-62.1	-60.1	-60.1	0.29	-42.0	-27	15.04
HE40 STBC, M0 to M9 2ss	2	13	-64.6	-62.0			0.29	-46.8	-27	19.81
HE40 STBC, M0 to M9 2ss	3	13	-64.9	-62.1	-59.7		0.29	-43.7	-27	16.67
HE40 STBC, M0 to M9 2ss	4	13	-64.4	-62.1	-60.1	-60.1	0.29	-42.0	-27	15.04


Frequency 5320 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Tx 3 Spur Power (dBm)	Tx 4 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	13	-56.2				0.23	-43.0	-27	15.97
Non HT20, 6 to 54 Mbps	2	13	-64.6	-62.1			0.23	-46.9	-27	19.93
Non HT20, 6 to 54 Mbps	3	13	-63.6	-62.6	-63.2		0.23	-45.1	-27	18.11
Non HT20, 6 to 54 Mbps	4	13	-64.4	-62.9	-64.8	-66.0	0.23	-45.1	-27	18.13
Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-64.6	-62.1			0.23	-46.9	-27	19.93
Non HT20 Beam Forming, 6 to 54 Mbps	3	16	-63.6	-62.6	-63.2		0.23	-42.1	-27	15.11
Non HT20 Beam Forming, 6 to 54 Mbps	4	16	-64.4	-62.9	-64.8	-66.0	0.23	-42.1	-27	15.13
HT/VHT20, M0 to M7	1	13	-56.5				0.22	-43.3	-27	16.28
HT/VHT20, M0 to M7	2	13	-64.2	-61.9			0.22	-46.7	-27	19.67
HT/VHT20, M8 to M15	2	13	-64.2	-61.9			0.22	-46.7	-27	19.67
HT/VHT20, M0 to M7	3	13	-65.0	-63.6	-63.0		0.22	-45.8	-27	18.8
HT/VHT20, M8 to M15	3	13	-63.8	-62.3	-60.4		0.22	-44.0	-27	16.95
HT/VHT20, M16 to M23	3	13	-63.8	-62.3	-60.4		0.22	-44.0	-27	16.95
HT/VHT20, M0 to M7	4	13	-64.7	-63.1	-63.4	-63.1	0.22	-44.3	-27	17.29
HT/VHT20, M8 to M15	4	13	-64.4	-61.8	-59.4	-61.1	0.22	-42.1	-27	15.09
HT/VHT20, M16 to M23	4	13	-64.4	-61.8	-59.4	-61.1	0.22	-42.1	-27	15.09
HT/VHT20, M24 to M31	4	13	-64.4	-61.8	-59.4	-61.1	0.22	-42.1	-27	15.09
HT/VHT20 Beam Forming, M0 to M7	2	13	-64.2	-61.9			0.22	-46.7	-27	19.67
HT/VHT20 Beam Forming, M8 to M15	2	13	-64.2	-61.9			0.22	-46.7	-27	19.67
HT/VHT20 Beam Forming, M0 to M7	3	16	-65.0	-63.6	-63.0		0.22	-42.8	-27	15.8
HT/VHT20 Beam Forming, M8 to M15	3	13	-63.8	-62.3	-60.4		0.22	-44.0	-27	16.95
HT/VHT20 Beam Forming, M16 to M23	3	13	-63.8	-62.3	-60.4		0.22	-44.0	-27	16.95
HT/VHT20 Beam Forming, M0 to M7	4	16	-64.7	-63.1	-63.4	-63.1	0.22	-41.3	-27	14.29
HT/VHT20 Beam Forming, M8 to M15	4	13	-64.4	-61.8	-59.4	-61.1	0.22	-42.1	-27	15.09
HT/VHT20 Beam Forming, M16 to M23	4	13	-64.4	-61.8	-59.4	-61.1	0.22	-42.1	-27	15.09
HT/VHT20 Beam Forming, M24 to M31	4	13	-64.4	-61.8	-59.4	-61.1	0.22	-42.1	-27	15.09
HT/VHT20 STBC, M0 to M7	2	13	-64.2	-61.9			0.22	-46.7	-27	19.67
HT/VHT20 STBC, M0 to M7	3	13	-63.8	-62.3	-60.4		0.22	-44.0	-27	16.95
HT/VHT20 STBC, M0 to M7	4	13	-64.4	-61.8	-59.4	-61.1	0.22	-42.1	-27	15.09
HE20, M0 to M9 1ss	1	13	-56.0				0.22	-42.8	-27	15.78
HE20, M0 to M9 1ss	2	13	-64.5	-59.1			0.22	-44.8	-27	17.78
HE20, M0 to M9 2ss	2	13	-64.5	-59.1			0.22	-44.8	-27	17.78
HE20, M0 to M9 1ss	3	13	-64.8	-62.6	-63.4		0.22	-45.5	-27	18.52
HE20, M0 to M9 2ss	3	13	-64.2	-62.7	-59.9		0.22	-43.9	-27	16.9
HE20, M0 to M9 3ss	3	13	-64.2	-62.7	-59.9		0.22	-43.9	-27	16.9
HE20, M0 to M9 1ss	4	13	-63.9	-62.6	-62.9	-62.7	0.22	-43.8	-27	16.76


HE20, M0 to M9 2ss	4	13	-65.0	-61.8	-59.4	-60.4	0.22	-42.0	-27	14.96
HE20, M0 to M9 3ss	4	13	-65.0	-61.8	-59.4	-60.4	0.22	-42.0	-27	14.96
HE20, M0 to M9 4ss	4	13	-65.0	-61.8	-59.4	-60.4	0.22	-42.0	-27	14.96
HE20 Beam Forming, M0 to M9 1ss	2	13	-64.5	-59.1			0.22	-44.8	-27	17.78
HE20 Beam Forming, M0 to M9 2ss	2	13	-64.5	-59.1			0.22	-44.8	-27	17.78
HE20 Beam Forming, M0 to M9 1ss	3	16	-64.8	-62.6	-63.4		0.22	-42.5	-27	15.52
HE20 Beam Forming, M0 to M9 2ss	3	13	-64.2	-62.7	-59.9		0.22	-43.9	-27	16.9
HE20 Beam Forming, M0 to M9 3ss	3	13	-64.2	-62.7	-59.9		0.22	-43.9	-27	16.9
HE20 Beam Forming, M0 to M9 1ss	4	16	-63.9	-62.6	-62.9	-62.7	0.22	-40.8	-27	13.76
HE20 Beam Forming, M0 to M9 2ss	4	13	-65.0	-61.8	-59.4	-60.4	0.22	-42.0	-27	14.96
HE20 Beam Forming, M0 to M9 3ss	4	13	-65.0	-61.8	-59.4	-60.4	0.22	-42.0	-27	14.96
HE20 Beam Forming, M0 to M9 4ss	4	13	-65.0	-61.8	-59.4	-60.4	0.22	-42.0	-27	14.96
HE20 STBC, M0 to M9 2ss	2	13	-64.5	-59.1			0.22	-44.8	-27	17.78
HE20 STBC, M0 to M9 2ss	3	13	-64.2	-62.7	-59.9		0.22	-43.9	-27	16.9
HE20 STBC, M0 to M9 2ss	4	13	-65.0	-61.8	-59.4	-60.4	0.22	-42.0	-27	14.96

Data Screenshots

5270 MHz: HT/VHT40 Beam Forming, M0 to M7

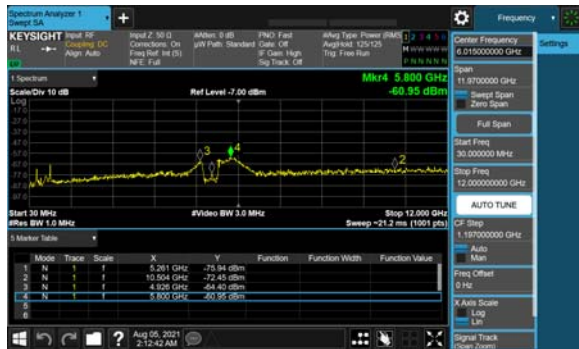

Antenna A

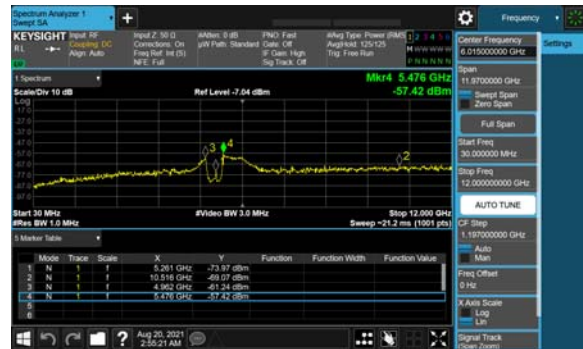

Antenna B



Antenna C

Keysight Spectrum Analyzer 1
Sweep SA

IF Res: 200 Hz
Avg: Off
Display: DC
Align: Auto
Ref: 1.0 dBm

Marker: 1
5.828 GHz
-61.06 dBm

Marker table:

Mode	Trace	Scale	X	Y	Function	Function Width	Function Value
1	N	f	5.828 GHz	-62.80 dBm			
2	N	f	10.000 GHz	-62.24 dBm			
3	N	f	4.962 GHz	-64.42 dBm			
4	N	f	5.862 GHz	-61.06 dBm			

Start 30 MHz
Stop 12.000 GHz
Sweep: 231.2 ms (1501 pts)

Frequency: 5.81000000 GHz
Center Frequency: 6.01500000 GHz
Span: 11.97000000 GHz
Sweep Span: 3.000000 MHz
Full Span: 30.000000 MHz
Start Freq: 12.00000000 GHz
Stop Freq: 12.00000000 GHz
AUTO TUNE
CF Step: 1.19700000 GHz
Auto Mode
Freq Offset: 0 Hz
X-Axis Scale: 1 Hz
Link: On
Signal: On

[illegible]

Spectrum Analyzer / Sweep SA

KEYSIGHT

Input SW: Coaxial Cable
Input: Auto
Output: Auto

Input 2: No
Connections: On
NFE: Full

Video: 8 dB
Y: Full
Standard: Off
Log: On
Track: Off

Video Type: Power (dB)
Aug 8/8 12:12:15
Trigger: Free Run


More view: 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 97

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

5270 MHz: HE40 Beam Forming, M0 to M9 1ss



Antenna A

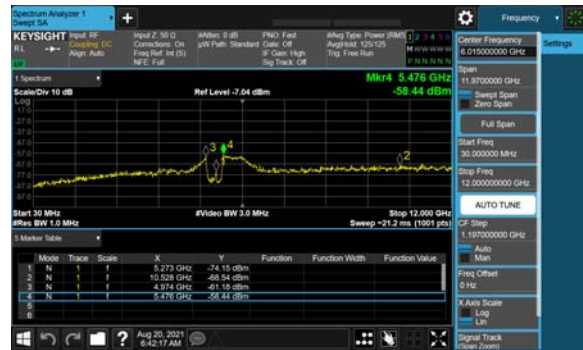

Antenna B



Antenna C

A.6: Conducted Bandedge

Conducted Band Edge Test Requirement

15.407(b):

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.
- (7) The provisions of §15.205 apply to intentional radiators operating under this section.
- (8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

2. Unwanted Emissions that fall Outside of the Restricted Bands

- a) For all measurements, follow the requirements in II.G.3. *“General Requirements for Unwanted Emissions Measurements.”*
- b) At frequencies below 1000 MHz, use the procedure described in II.G.4. *“Procedure for Unwanted Emissions Measurements Below 1000 MHz.”*
- c) At frequencies above 1000 MHz, use the procedure for maximum emissions described in II.G.5., *“Procedure for Unwanted Emissions Measurements Above 1000 MHz.”*
- (i) Sections 15.407(b) (1-3) specifies the unwanted emissions limit for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.

Conducted Band Edge Test Procedure

Ref. ANSI C63.10: 2013

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Conducted Spurious Emissions Test Procedure
1. Connect the antenna port(s) to the spectrum analyzer input. 2. Place the radio in continuous transmit mode 3. Configure Spectrum analyzer as per test parameters below (be sure to enter all losses between the transmitter output and the spectrum analyzer). 4. Use the peak marker function to determine the maximum spurs amplitude level. 5. The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. The worst-case output is recorded. (See ANSI C63.10:2013 section 14.3.2.2) 6. Capture graphs and record pertinent measurement data.

Ref. ANSI C63.10: 2013 section 12.7.6 (Peak) and 12.7.7.2 (Average)**KDB 789033 D02 General UNII Test Procedures New Rules v02r01, Sec. 5 (Peak), Sec. 6 (Average Method AD)**

Conducted Spurious Emissions Test parameters	
Peak RBW = 1 MHz VBW ≥ 3 MHz Sweep = Auto Detector = Peak Trace = Max Hold.	Average RBW = 1 MHz VBW ≥ 3 MHz Sweep = Auto Detector = RMS Power Averaging
Tested By: Johanna Knudsen, Julian Land, Mathew Blackburn	Date of testing: 26-JUL-2021 to 28-JUL-2021; 30-JUL-2021 to 01-AUG-2021; 03-AUG-2021 to 11-AUG-2021; 13-AUG-2021 to 25-AUG-2021; 27-AUG-2021; 01-SEP-2021 to 04-SEP-2021; 11-SEP-2021 to 14-SEP-2021
Test Result: PASS	

Test Equipment

See Appendix C for list of test equipment

Conducted Bandedge Average**Frequency 5290 MHz**

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Tx 2 Bandedge Level (dBm)	Tx 3 Bandedge Level (dBm)	Tx 4 Bandedge Level (dBm)	Duty Cycle (dB)	Total Tx Bandedge Level (dBm)	Limit (dB)	Margin (dB)
Non HT80, 6 to 54 Mbps	1	13	-59.5				0.28	-46.2	-41	4.97
Non HT80, 6 to 54 Mbps	2	13	-61.9	-58.3			0.28	-43.4	-41	2.2
Non HT80, 6 to 54 Mbps	3	13	-63.7	-60.5	-60.2		0.28	-43.2	-41	1.9
Non HT80, 6 to 54 Mbps	4	13	-63.7	-60.5	-60.2	-59.2	0.28	-41.3	-41	0.06
VHT80, M0 to M9 1ss	1	13	-55.9				0.35	-42.6	-41	1.3
VHT80, M0 to M9 1ss	2	13	-60.6	-57.6			0.33	-42.5	-41	1.26
VHT80, M0 to M9 2ss	2	13	-60.6	-57.6			0.33	-42.5	-41	1.26
VHT80, M0 to M9 1ss	3	13	-62.7	-59.2	-59.6		0.33	-42.1	-41	0.89
VHT80, M0 to M9 2ss	3	13	-62.7	-59.2	-59.6		0.33	-42.1	-41	0.89
VHT80, M0 to M9 3ss	3	13	-62.7	-59.2	-59.6		0.33	-42.1	-41	0.89
VHT80, M0 to M9 1ss	4	13	-63.9	-60.7	-61.9	-59.7	0.33	-41.9	-41	0.68
VHT80, M0 to M9 2ss	4	13	-63.9	-60.7	-61.9	-59.7	0.33	-41.9	-41	0.68
VHT80, M0 to M9 3ss	4	13	-63.9	-60.7	-61.9	-59.7	0.33	-41.9	-41	0.68
VHT80, M0 to M9 4ss	4	13	-63.9	-60.7	-61.9	-59.7	0.33	-41.9	-41	0.68
VHT80 Beam Forming, M0 to M9 1ss	2	13	-60.6	-57.6			0.33	-42.5	-41	1.26
VHT80 Beam Forming, M0 to M9 2ss	2	13	-60.6	-57.6			0.33	-42.5	-41	1.26
VHT80 Beam Forming, M0 to M9 1ss	3	16	-64.1	-63.3	-62.1		0.33	-42.0	-41	0.74
VHT80 Beam Forming, M0 to M9 2ss	3	13	-62.7	-59.2	-59.6		0.33	-42.1	-41	0.89
VHT80 Beam Forming, M0 to M9 3ss	3	13	-62.7	-59.2	-59.6		0.33	-42.1	-41	0.89
VHT80 Beam Forming, M0 to M9 1ss	4	16	-67.5	-64.8	-64.6	-64.1	0.33	-42.7	-41	1.47
VHT80 Beam Forming, M0 to M9 2ss	4	13	-63.9	-60.7	-61.9	-59.7	0.33	-41.9	-41	0.68
VHT80 Beam Forming, M0 to M9 3ss	4	13	-63.9	-60.7	-61.9	-59.7	0.33	-41.9	-41	0.68
VHT80 Beam Forming, M0 to M9 4ss	4	13	-63.9	-60.7	-61.9	-59.7	0.33	-41.9	-41	0.68
VHT80 STBC, M0 to M9 1ss	2	13	-60.6	-57.6			0.33	-42.5	-41	1.26
VHT80 STBC, M0 to M9 1ss	3	13	-62.7	-59.2	-59.6		0.33	-42.1	-41	0.89
VHT80 STBC, M0 to M9 1ss	4	13	-63.9	-60.7	-61.9	-59.7	0.33	-41.9	-41	0.68
HE80, M0 to M9 1ss	1	13	-54.7				0.23	-41.5	-41	0.22
HE80, M0 to M9 1ss	2	13	-61.3	-57.9			0.23	-43.0	-41	1.78
HE80, M0 to M9 2ss	2	13	-61.3	-57.9			0.23	-43.0	-41	1.78
HE80, M0 to M9 1ss	3	13	-62.2	-60.7	-59.9		0.23	-42.8	-41	1.58
HE80, M0 to M9 2ss	3	13	-62.2	-60.7	-59.9		0.23	-42.8	-41	1.58
HE80, M0 to M9 3ss	3	13	-62.2	-60.7	-59.9		0.23	-42.8	-41	1.58
HE80, M0 to M9 1ss	4	13	-64.0	-61.6	-59.8	-59.1	0.23	-41.5	-41	0.25
HE80, M0 to M9 2ss	4	13	-64.0	-61.6	-59.8	-59.1	0.23	-41.5	-41	0.25
HE80, M0 to M9 3ss	4	13	-64.0	-61.6	-59.8	-59.1	0.23	-41.5	-41	0.25
HE80, M0 to M9 4ss	4	13	-64.0	-61.6	-59.8	-59.1	0.23	-41.5	-41	0.25
HE80 Beam Forming, M0 to M9 1ss	2	13	-61.3	-57.9			0.23	-43.0	-41	1.78

HE80 Beam Forming, M0 to M9 2ss	2	13	-61.3	-57.9			0.23	-43.0	-41	1.78
HE80 Beam Forming, M0 to M9 1ss	3	16	-67.5	-63.8	-63.8		0.23	-43.7	-41	2.47
HE80 Beam Forming, M0 to M9 2ss	3	13	-62.2	-60.7	-59.9		0.23	-42.8	-41	1.58
HE80 Beam Forming, M0 to M9 3ss	3	13	-62.2	-60.7	-59.9		0.23	-42.8	-41	1.58
HE80 Beam Forming, M0 to M9 1ss	4	16	-67.5	-63.8	-63.8	-62.9	0.23	-41.9	-41	0.69
HE80 Beam Forming, M0 to M9 2ss	4	13	-64.0	-61.6	-59.8	-59.1	0.23	-41.5	-41	0.25
HE80 Beam Forming, M0 to M9 3ss	4	13	-64.0	-61.6	-59.8	-59.1	0.23	-41.5	-41	0.25
HE80 Beam Forming, M0 to M9 4ss	4	13	-64.0	-61.6	-59.8	-59.1	0.23	-41.5	-41	0.25
HE80 STBC, M0 to M9 1ss	2	13	-61.3	-57.9			0.23	-43.0	-41	1.78
HE80 STBC, M0 to M9 1ss	3	13	-62.2	-60.7	-59.9		0.23	-42.8	-41	1.58
HE80 STBC, M0 to M9 1ss	4	13	-64.0	-61.6	-59.8	-59.1	0.23	-41.5	-41	0.25

Frequency 5310 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Tx 2 Bandedge Level (dBm)	Tx 3 Bandedge Level (dBm)	Tx 4 Bandedge Level (dBm)	Duty Cycle (dB)	Total Tx Bandedge Level (dBm)	Limit (dB)	Margin (dB)
Non HT40, 6 to 54 Mbps	1	13	-55.0				0.34	-41.7	-41	0.41
Non HT40, 6 to 54 Mbps	2	13	-62.2	-60.5			0.34	-44.9	-41	3.67
Non HT40, 6 to 54 Mbps	3	13	-64.1	-61.5	-62.9		0.34	-44.6	-41	3.34
Non HT40, 6 to 54 Mbps	4	13	-63.5	-59.8	-61.9	-61.9	0.34	-42.2	-41	0.96
HT/VHT40, M0 to M7	1	13	-55.1				0.32	-41.8	-41	0.53
HT/VHT40, M0 to M7	2	13	-60.0	-56.3			0.32	-41.4	-41	0.19
HT/VHT40, M8 to M15	2	13	-60.0	-56.3			0.32	-41.4	-41	0.19
HT/VHT40, M0 to M7	3	13	-62.7	-59.8	-60.8		0.32	-42.8	-41	1.6
HT/VHT40, M8 to M15	3	13	-61.4	-59.1	-58.6		0.32	-41.4	-41	0.2
HT/VHT40, M16 to M23	3	13	-61.4	-59.1	-58.6		0.32	-41.4	-41	0.2
HT/VHT40, M0 to M7	4	13	-64.5	-61.9	-61.9	-60.4	0.32	-42.6	-41	1.35
HT/VHT40, M8 to M15	4	13	-64.5	-61.9	-61.9	-60.4	0.32	-42.6	-41	1.35
HT/VHT40, M16 to M23	4	13	-64.5	-61.9	-61.9	-60.4	0.32	-42.6	-41	1.35
HT/VHT40, M24 to M31	4	13	-64.5	-61.9	-61.9	-60.4	0.32	-42.6	-41	1.35
HT/VHT40 Beam Forming, M0 to M7	2	13	-60.0	-56.3			0.32	-41.4	-41	0.19
HT/VHT40 Beam Forming, M8 to M15	2	13	-60.0	-56.3			0.32	-41.4	-41	0.19
HT/VHT40 Beam Forming, M0 to M7	3	16	-64.5	-61.9	-61.9		0.32	-41.5	-41	0.27
HT/VHT40 Beam Forming, M8 to M15	3	13	-61.4	-59.1	-58.6		0.32	-41.4	-41	0.2
HT/VHT40 Beam Forming, M16 to M23	3	13	-61.4	-59.1	-58.6		0.32	-41.4	-41	0.2
HT/VHT40 Beam Forming, M0 to M7	4	16	-66.4	-63.6	-63.2	-64.3	0.32	-41.9	-41	0.62
HT/VHT40 Beam Forming, M8 to M15	4	13	-64.5	-61.9	-61.9	-60.4	0.32	-42.6	-41	1.35
HT/VHT40 Beam Forming, M16 to M23	4	13	-64.5	-61.9	-61.9	-60.4	0.32	-42.6	-41	1.35
HT/VHT40 Beam Forming, M24 to M31	4	13	-64.5	-61.9	-61.9	-60.4	0.32	-42.6	-41	1.35
HT/VHT40 STBC, M0 to M7	2	13	-60.0	-56.3			0.32	-41.4	-41	0.19
HT/VHT40 STBC, M0 to M7	3	13	-61.4	-59.1	-58.6		0.32	-41.4	-41	0.2
HT/VHT40 STBC, M0 to M7	4	13	-64.5	-61.9	-61.9	-60.4	0.32	-42.6	-41	1.35

HE40, M0 to M9 1ss	1	13	-54.6				0.29	-41.3	-41	0.06
HE40, M0 to M9 1ss	2	13	-61.1	-56.7			0.29	-42.1	-41	0.81
HE40, M0 to M9 2ss	2	13	-61.1	-56.7			0.29	-42.1	-41	0.81
HE40, M0 to M9 1ss	3	13	-62.2	-59.1	-59.7		0.29	-42.1	-41	0.83
HE40, M0 to M9 2ss	3	13	-62.2	-59.1	-59.7		0.29	-42.1	-41	0.83
HE40, M0 to M9 3ss	3	13	-62.2	-59.1	-59.7		0.29	-42.1	-41	0.83
HE40, M0 to M9 1ss	4	13	-62.9	-60.6	-60.8	-59.5	0.29	-41.5	-41	0.23
HE40, M0 to M9 2ss	4	13	-62.9	-60.6	-60.8	-59.5	0.29	-41.5	-41	0.23
HE40, M0 to M9 3ss	4	13	-62.9	-60.6	-60.8	-59.5	0.29	-41.5	-41	0.23
HE40, M0 to M9 4ss	4	13	-62.9	-60.6	-60.8	-59.5	0.29	-41.5	-41	0.23
HE40 Beam Forming, M0 to M9 1ss	2	13	-61.1	-56.7			0.29	-42.1	-41	0.81
HE40 Beam Forming, M0 to M9 2ss	2	13	-61.1	-56.7			0.29	-42.1	-41	0.81
HE40 Beam Forming, M0 to M9 1ss	3	16	-65.1	-63.3	-62.8		0.29	-42.6	-41	1.32
HE40 Beam Forming, M0 to M9 2ss	3	13	-62.2	-59.1	-59.7		0.29	-42.1	-41	0.83
HE40 Beam Forming, M0 to M9 3ss	3	13	-62.2	-59.1	-59.7		0.29	-42.1	-41	0.83
HE40 Beam Forming, M0 to M9 1ss	4	16	-68.1	-64.9	-63.8	-64.1	0.29	-42.6	-41	1.37
HE40 Beam Forming, M0 to M9 2ss	4	13	-62.9	-60.6	-60.8	-59.5	0.29	-41.5	-41	0.23
HE40 Beam Forming, M0 to M9 3ss	4	13	-62.9	-60.6	-60.8	-59.5	0.29	-41.5	-41	0.23
HE40 Beam Forming, M0 to M9 4ss	4	13	-62.9	-60.6	-60.8	-59.5	0.29	-41.5	-41	0.23
HE40 STBC, M0 to M9 2ss	2	13	-61.1	-56.7			0.29	-42.1	-41	0.81
HE40 STBC, M0 to M9 2ss	3	13	-62.2	-59.1	-59.7		0.29	-42.1	-41	0.83
HE40 STBC, M0 to M9 2ss	4	13	-62.9	-60.6	-60.8	-59.5	0.29	-41.5	-41	0.23


Frequency 5320 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Tx 2 Bandedge Level (dBm)	Tx 3 Bandedge Level (dBm)	Tx 4 Bandedge Level (dBm)	Duty Cycle (dB)	Total Tx Bandedge Level (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	13	-55.6				0.23	-42.4	-41	1.12
Non HT20, 6 to 54 Mbps	2	13	-67.5	-63.6			0.23	-48.9	-41	7.64
Non HT20, 6 to 54 Mbps	3	13	-70.6	-68.0	-64.2		0.23	-48.8	-41	7.56
Non HT20, 6 to 54 Mbps	4	13	-71.1	-65.7	-67.2	-68.1	0.23	-48.4	-41	7.12
Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-67.5	-63.6			0.23	-48.9	-41	7.64
Non HT20 Beam Forming, 6 to 54 Mbps	3	16	-70.6	-68.0	-64.2		0.23	-45.8	-41	4.56
Non HT20 Beam Forming, 6 to 54 Mbps	4	16	-71.1	-65.7	-67.2	-68.1	0.23	-45.4	-41	4.12
HT/VHT20, M0 to M7	1	13	-54.7				0.22	-41.5	-41	0.23
HT/VHT20, M0 to M7	2	13	-66.4	-62.8			0.22	-48.0	-41	6.76
HT/VHT20, M8 to M15	2	13	-66.4	-62.8			0.22	-48.0	-41	6.76
HT/VHT20, M0 to M7	3	13	-70.0	-66.2	-65.4		0.22	-48.8	-41	7.55
HT/VHT20, M8 to M15	3	13	-69.1	-63.2	-65.3		0.22	-47.3	-41	6.0
HT/VHT20, M16 to M23	3	13	-69.1	-63.2	-65.3		0.22	-47.3	-41	6.0
HT/VHT20, M0 to M7	4	13	-71.1	-65.8	-65.3	-66.7	0.22	-47.5	-41	6.24
HT/VHT20, M8 to M15	4	13	-69.3	-65.5	-64.8	-64.9	0.22	-46.6	-41	5.3
HT/VHT20, M16 to M23	4	13	-69.3	-65.5	-64.8	-64.9	0.22	-46.6	-41	5.3
HT/VHT20, M24 to M31	4	13	-69.3	-65.5	-64.8	-64.9	0.22	-46.6	-41	5.3
HT/VHT20 Beam Forming, M0 to M7	2	13	-66.4	-62.8			0.22	-48.0	-41	6.76
HT/VHT20 Beam Forming, M8 to M15	2	13	-66.4	-62.8			0.22	-48.0	-41	6.76

HT/VHT20 Beam Forming, M0 to M7	3	16	-70.0	-66.2	-65.4		0.22	-45.8	-41	4.55
HT/VHT20 Beam Forming, M8 to M15	3	13	-69.1	-63.2	-65.3		0.22	-47.3	-41	6.0
HT/VHT20 Beam Forming, M16 to M23	3	13	-69.1	-63.2	-65.3		0.22	-47.3	-41	6.0
HT/VHT20 Beam Forming, M0 to M7	4	16	-71.1	-65.8	-65.3	-66.7	0.22	-44.5	-41	3.24
HT/VHT20 Beam Forming, M8 to M15	4	13	-69.3	-65.5	-64.8	-64.9	0.22	-46.6	-41	5.3
HT/VHT20 Beam Forming, M16 to M23	4	13	-69.3	-65.5	-64.8	-64.9	0.22	-46.6	-41	5.3
HT/VHT20 Beam Forming, M24 to M31	4	13	-69.3	-65.5	-64.8	-64.9	0.22	-46.6	-41	5.3
HT/VHT20 STBC, M0 to M7	2	13	-66.4	-62.8			0.22	-48.0	-41	6.76
HT/VHT20 STBC, M0 to M7	3	13	-69.1	-63.2	-65.3		0.22	-47.3	-41	6.0
HT/VHT20 STBC, M0 to M7	4	13	-69.3	-65.5	-64.8	-64.9	0.22	-46.6	-41	5.3
HE20, M0 to M9 1ss	1	13	-55.4				0.22	-42.2	-41	0.93
HE20, M0 to M9 1ss	2	13	-66.0	-58.7			0.22	-44.7	-41	3.49
HE20, M0 to M9 2ss	2	13	-66.0	-58.7			0.22	-44.7	-41	3.49
HE20, M0 to M9 1ss	3	13	-70.2	-65.1	-64.6		0.22	-48.0	-41	6.77
HE20, M0 to M9 2ss	3	13	-68.9	-63.1	-64.1		0.22	-46.7	-41	5.5
HE20, M0 to M9 3ss	3	13	-68.9	-63.1	-64.1		0.22	-46.7	-41	5.5
HE20, M0 to M9 1ss	4	13	-71.1	-65.2	-65.4	-65.3	0.22	-46.9	-41	5.7
HE20, M0 to M9 2ss	4	13	-68.7	-65.6	-64.9	-65.7	0.22	-46.8	-41	5.52
HE20, M0 to M9 3ss	4	13	-68.7	-65.6	-64.9	-65.7	0.22	-46.8	-41	5.52
HE20, M0 to M9 4ss	4	13	-68.7	-65.6	-64.9	-65.7	0.22	-46.8	-41	5.52
HE20 Beam Forming, M0 to M9 1ss	2	13	-66.0	-58.7			0.22	-44.7	-41	3.49
HE20 Beam Forming, M0 to M9 2ss	2	13	-66.0	-58.7			0.22	-44.7	-41	3.49
HE20 Beam Forming, M0 to M9 1ss	3	16	-70.2	-65.1	-64.6		0.22	-45.0	-41	3.77
HE20 Beam Forming, M0 to M9 2ss	3	13	-68.9	-63.1	-64.1		0.22	-46.7	-41	5.5
HE20 Beam Forming, M0 to M9 3ss	3	13	-68.9	-63.1	-64.1		0.22	-46.7	-41	5.5
HE20 Beam Forming, M0 to M9 1ss	4	16	-71.1	-65.2	-65.4	-65.3	0.22	-43.9	-41	2.7
HE20 Beam Forming, M0 to M9 2ss	4	13	-68.7	-65.6	-64.9	-65.7	0.22	-46.8	-41	5.52
HE20 Beam Forming, M0 to M9 3ss	4	13	-68.7	-65.6	-64.9	-65.7	0.22	-46.8	-41	5.52
HE20 Beam Forming, M0 to M9 4ss	4	13	-68.7	-65.6	-64.9	-65.7	0.22	-46.8	-41	5.52
HE20 STBC, M0 to M9 2ss	2	13	-66.0	-58.7			0.22	-44.7	-41	3.49
HE20 STBC, M0 to M9 2ss	3	13	-68.9	-63.1	-64.1		0.22	-46.7	-41	5.5
HE20 STBC, M0 to M9 2ss	4	13	-68.7	-65.6	-64.9	-65.7	0.22	-46.8	-41	5.52

Data Screenshots

5290 MHz: Non HT80, 6 to 54 Mbps

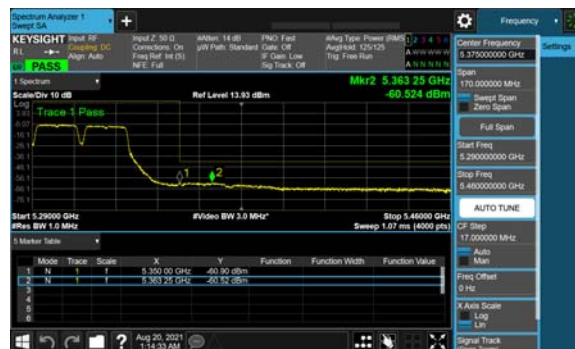



Antenna C



Antenna D

5310 MHz: HE40, M0 to M9 1ss



Antenna A

5310 MHz: HT/VHT40, M0 to M7



Antenna A



Antenna B

Conducted Bandedge Peak**Frequency 5290 MHz**

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Tx 2 Bandedge Level (dBm)	Tx 3 Bandedge Level (dBm)	Tx 4 Bandedge Level (dBm)	Total Tx Bandedge Level (dBm)	Limit (dB)	Margin (dB)
Non HT80, 6 to 54 Mbps	1	13	-48.0				-34.7	-27	7.72
Non HT80, 6 to 54 Mbps	2	13	-46.9	-46.6			-30.5	-27	3.46
Non HT80, 6 to 54 Mbps	3	13	-44.4	-49.7	-50.4		-29.2	-27	2.23
Non HT80, 6 to 54 Mbps	4	13	-44.4	-49.7	-50.4	-48.7	-28.3	-27	1.29
VHT80, M0 to M9 1ss	1	13	-45.3				-32.0	-27	4.95
VHT80, M0 to M9 1ss	2	13	-49.7	-44.6			-30.1	-27	3.1
VHT80, M0 to M9 2ss	2	13	-49.7	-44.6			-30.1	-27	3.1
VHT80, M0 to M9 1ss	3	13	-51.5	-48.2	-47.8		-30.8	-27	3.78
VHT80, M0 to M9 2ss	3	13	-51.5	-48.2	-47.8		-30.8	-27	3.78
VHT80, M0 to M9 3ss	3	13	-51.5	-48.2	-47.8		-30.8	-27	3.78
VHT80, M0 to M9 1ss	4	13	-44.6	-47.7	-50.3	-48.0	-27.8	-27	0.81
VHT80, M0 to M9 2ss	4	13	-44.6	-47.7	-50.3	-48.0	-27.8	-27	0.81
VHT80, M0 to M9 3ss	4	13	-44.6	-47.7	-50.3	-48.0	-27.8	-27	0.81
VHT80, M0 to M9 4ss	4	13	-44.6	-47.7	-50.3	-48.0	-27.8	-27	0.81
VHT80 Beam Forming, M0 to M9 1ss	2	13	-49.7	-44.6			-30.1	-27	3.1
VHT80 Beam Forming, M0 to M9 2ss	2	13	-49.7	-44.6			-30.1	-27	3.1
VHT80 Beam Forming, M0 to M9 1ss	3	16	-52.9	-50.9	-50.9		-30.4	-27	3.37
VHT80 Beam Forming, M0 to M9 2ss	3	13	-51.5	-48.2	-47.8		-30.8	-27	3.78
VHT80 Beam Forming, M0 to M9 3ss	3	13	-51.5	-48.2	-47.8		-30.8	-27	3.78
VHT80 Beam Forming, M0 to M9 1ss	4	16	-55.8	-53.8	-52.2	-52.3	-30.9	-27	3.95
VHT80 Beam Forming, M0 to M9 2ss	4	13	-44.6	-47.7	-50.3	-48.0	-27.8	-27	0.81
VHT80 Beam Forming, M0 to M9 3ss	4	13	-44.6	-47.7	-50.3	-48.0	-27.8	-27	0.81
VHT80 Beam Forming, M0 to M9 4ss	4	13	-44.6	-47.7	-50.3	-48.0	-27.8	-27	0.81
VHT80 STBC, M0 to M9 1ss	2	13	-49.7	-44.6			-30.1	-27	3.1
VHT80 STBC, M0 to M9 1ss	3	13	-51.5	-48.2	-47.8		-30.8	-27	3.78
VHT80 STBC, M0 to M9 1ss	4	13	-44.6	-47.7	-50.3	-48.0	-27.8	-27	0.81
HE80, M0 to M9 1ss	1	13	-40.6				-27.4	-27	0.37
HE80, M0 to M9 1ss	2	13	-50.9	-47.2			-32.4	-27	5.43
HE80, M0 to M9 2ss	2	13	-50.9	-47.2			-32.4	-27	5.43
HE80, M0 to M9 1ss	3	13	-51.0	-48.7	-48.6		-31.3	-27	4.3
HE80, M0 to M9 2ss	3	13	-51.0	-48.7	-48.6		-31.3	-27	4.3
HE80, M0 to M9 3ss	3	13	-51.0	-48.7	-48.6		-31.3	-27	4.3
HE80, M0 to M9 1ss	4	13	-52.7	-50.0	-48.2	-48.9	-30.4	-27	3.4
HE80, M0 to M9 2ss	4	13	-52.7	-50.0	-48.2	-48.9	-30.4	-27	3.4
HE80, M0 to M9 3ss	4	13	-52.7	-50.0	-48.2	-48.9	-30.4	-27	3.4
HE80, M0 to M9 4ss	4	13	-52.7	-50.0	-48.2	-48.9	-30.4	-27	3.4
HE80 Beam Forming, M0 to M9 1ss	2	13	-50.9	-47.2			-32.4	-27	5.43
HE80 Beam Forming, M0 to M9 2ss	2	13	-50.9	-47.2			-32.4	-27	5.43
HE80 Beam Forming, M0 to M9 1ss	3	16	-51.4	-54.2	-51.3		-31.1	-27	4.11
HE80 Beam Forming, M0 to M9 2ss	3	13	-51.0	-48.7	-48.6		-31.3	-27	4.3
HE80 Beam Forming, M0 to M9 3ss	3	13	-51.0	-48.7	-48.6		-31.3	-27	4.3
HE80 Beam Forming, M0 to M9 1ss	4	16	-51.4	-54.2	-51.3	-52.5	-30.0	-27	2.95
HE80 Beam Forming, M0 to M9 2ss	4	13	-52.7	-50.0	-48.2	-48.9	-30.4	-27	3.4
HE80 Beam Forming, M0 to M9 3ss	4	13	-52.7	-50.0	-48.2	-48.9	-30.4	-27	3.4
HE80 Beam Forming, M0 to M9 4ss	4	13	-52.7	-50.0	-48.2	-48.9	-30.4	-27	3.4

HE80 STBC, M0 to M9 1ss	2	13	-50.9	-47.2			-32.4	-27	5.43
HE80 STBC, M0 to M9 1ss	3	13	-51.0	-48.7	-48.6		-31.3	-27	4.3
HE80 STBC, M0 to M9 1ss	4	13	-52.7	-50.0	-48.2	-48.9	-30.4	-27	3.4

Frequency 5310 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Tx 2 Bandedge Level (dBm)	Tx 3 Bandedge Level (dBm)	Tx 4 Bandedge Level (dBm)	Total Tx Bandedge Level (dBm)	Limit (dB)	Margin (dB)
Non HT40, 6 to 54 Mbps	1	13	-41.5				-28.2	-27	1.16
Non HT40, 6 to 54 Mbps	2	13	-47.0	-46.6			-30.4	-27	3.45
Non HT40, 6 to 54 Mbps	3	13	-47.3	-51.1	-51.9		-31.5	-27	4.5
Non HT40, 6 to 54 Mbps	4	13	-46.6	-44.3	-50.3	-50.0	-27.7	-27	0.72
HT/VHT40, M0 to M7	1	13	-43.6				-30.3	-27	3.28
HT/VHT40, M0 to M7	2	13	-48.7	-45.8			-30.7	-27	3.68
HT/VHT40, M8 to M15	2	13	-48.7	-45.8			-30.7	-27	3.68
HT/VHT40, M0 to M7	3	13	-51.1	-49.2	-50.1		-32.0	-27	4.97
HT/VHT40, M8 to M15	3	13	-47.7	-44.5	-44.2		-27.1	-27	0.11
HT/VHT40, M16 to M23	3	13	-47.7	-44.5	-44.2		-27.1	-27	0.11
HT/VHT40, M0 to M7	4	13	-51.4	-50.2	-50.2	-49.5	-30.9	-27	3.93
HT/VHT40, M8 to M15	4	13	-51.4	-50.2	-50.2	-49.5	-30.9	-27	3.93
HT/VHT40, M16 to M23	4	13	-51.4	-50.2	-50.2	-49.5	-30.9	-27	3.93
HT/VHT40, M24 to M31	4	13	-51.4	-50.2	-50.2	-49.5	-30.9	-27	3.93
HT/VHT40 Beam Forming, M0 to M7	2	13	-48.7	-45.8			-30.7	-27	3.68
HT/VHT40 Beam Forming, M8 to M15	2	13	-48.7	-45.8			-30.7	-27	3.68
HT/VHT40 Beam Forming, M0 to M7	3	16	-51.4	-50.2	-50.2		-29.5	-27	2.47
HT/VHT40 Beam Forming, M8 to M15	3	13	-47.7	-44.5	-44.2		-27.1	-27	0.11
HT/VHT40 Beam Forming, M16 to M23	3	13	-47.7	-44.5	-44.2		-27.1	-27	0.11
HT/VHT40 Beam Forming, M0 to M7	4	16	-54.1	-52.0	-51.3	-52.0	-29.9	-27	2.89
HT/VHT40 Beam Forming, M8 to M15	4	13	-51.4	-50.2	-50.2	-49.5	-30.9	-27	3.93
HT/VHT40 Beam Forming, M16 to M23	4	13	-51.4	-50.2	-50.2	-49.5	-30.9	-27	3.93
HT/VHT40 Beam Forming, M24 to M31	4	13	-51.4	-50.2	-50.2	-49.5	-30.9	-27	3.93
HT/VHT40 STBC, M0 to M7	2	13	-48.7	-45.8			-30.7	-27	3.68
HT/VHT40 STBC, M0 to M7	3	13	-47.7	-44.5	-44.2		-27.1	-27	0.11
HT/VHT40 STBC, M0 to M7	4	13	-51.4	-50.2	-50.2	-49.5	-30.9	-27	3.93
HE40, M0 to M9 1ss	1	13	-42.6				-29.3	-27	2.31
HE40, M0 to M9 1ss	2	13	-47.6	-46.2			-30.5	-27	3.54
HE40, M0 to M9 2ss	2	13	-47.6	-46.2			-30.5	-27	3.54
HE40, M0 to M9 1ss	3	13	-50.2	-47.5	-49.1		-30.7	-27	3.73
HE40, M0 to M9 2ss	3	13	-50.2	-47.5	-49.1		-30.7	-27	3.73
HE40, M0 to M9 3ss	3	13	-50.2	-47.5	-49.1		-30.7	-27	3.73
HE40, M0 to M9 1ss	4	13	-52.4	-50.0	-50.6	-49.2	-31.1	-27	4.09
HE40, M0 to M9 2ss	4	13	-52.4	-50.0	-50.6	-49.2	-31.1	-27	4.09
HE40, M0 to M9 3ss	4	13	-52.4	-50.0	-50.6	-49.2	-31.1	-27	4.09
HE40, M0 to M9 4ss	4	13	-52.4	-50.0	-50.6	-49.2	-31.1	-27	4.09
HE40 Beam Forming, M0 to M9 1ss	2	13	-47.6	-46.2			-30.5	-27	3.54
HE40 Beam Forming, M0 to M9 2ss	2	13	-47.6	-46.2			-30.5	-27	3.54
HE40 Beam Forming, M0 to M9 1ss	3	16	-54.0	-52.9	-52.3		-31.9	-27	4.95
HE40 Beam Forming, M0 to M9 2ss	3	13	-50.2	-47.5	-49.1		-30.7	-27	3.73
HE40 Beam Forming, M0 to M9 3ss	3	13	-50.2	-47.5	-49.1		-30.7	-27	3.73
HE40 Beam Forming, M0 to M9 1ss	4	16	-56.4	-55.1	-53.0	-53.0	-31.8	-27	4.83
HE40 Beam Forming, M0 to M9 2ss	4	13	-52.4	-50.0	-50.6	-49.2	-31.1	-27	4.09

HE40 Beam Forming, M0 to M9 3ss	4	13	-52.4	-50.0	-50.6	-49.2	-31.1	-27	4.09
HE40 Beam Forming, M0 to M9 4ss	4	13	-52.4	-50.0	-50.6	-49.2	-31.1	-27	4.09
HE40 STBC, M0 to M9 2ss	2	13	-47.6	-46.2			-30.5	-27	3.54
HE40 STBC, M0 to M9 2ss	3	13	-50.2	-47.5	-49.1		-30.7	-27	3.73
HE40 STBC, M0 to M9 2ss	4	13	-52.4	-50.0	-50.6	-49.2	-31.1	-27	4.09

Frequency 5320 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Tx 2 Bandedge Level (dBm)	Tx 3 Bandedge Level (dBm)	Tx 4 Bandedge Level (dBm)	Total Tx Bandedge Level (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	13	-43.8				-30.6	-27	3.57
Non HT20, 6 to 54 Mbps	2	13	-54.1	-51.8			-36.6	-27	9.56
Non HT20, 6 to 54 Mbps	3	13	-58.2	-55.9	-54.8		-38.1	-27	11.08
Non HT20, 6 to 54 Mbps	4	13	-59.4	-54.3	-58.2	-57.8	-37.7	-27	10.72
Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-54.1	-51.8			-36.6	-27	9.56
Non HT20 Beam Forming, 6 to 54 Mbps	3	16	-58.2	-55.9	-54.8		-35.1	-27	8.08
Non HT20 Beam Forming, 6 to 54 Mbps	4	16	-59.4	-54.3	-58.2	-57.8	-34.7	-27	7.72
HT/VHT20, M0 to M7	1	13	-44.1				-30.9	-27	3.88
HT/VHT20, M0 to M7	2	13	-53.5	-52.3			-36.6	-27	9.63
HT/VHT20, M8 to M15	2	13	-53.5	-52.3			-36.6	-27	9.63
HT/VHT20, M0 to M7	3	13	-57.6	-52.4	-51.7		-35.2	-27	8.24
HT/VHT20, M8 to M15	3	13	-55.7	-53.0	-52.9		-35.7	-27	8.7
HT/VHT20, M16 to M23	3	13	-55.7	-53.0	-52.9		-35.7	-27	8.7
HT/VHT20, M0 to M7	4	13	-59.0	-53.7	-53.6	-53.1	-35.1	-27	8.08
HT/VHT20, M8 to M15	4	13	-55.8	-53.1	-53.2	-53.7	-34.6	-27	7.59
HT/VHT20, M16 to M23	4	13	-55.8	-53.1	-53.2	-53.7	-34.6	-27	7.59
HT/VHT20, M24 to M31	4	13	-55.8	-53.1	-53.2	-53.7	-34.6	-27	7.59
HT/VHT20 Beam Forming, M0 to M7	2	13	-53.5	-52.3			-36.6	-27	9.63
HT/VHT20 Beam Forming, M8 to M15	2	13	-53.5	-52.3			-36.6	-27	9.63
HT/VHT20 Beam Forming, M0 to M7	3	16	-57.6	-52.4	-51.7		-32.2	-27	5.24
HT/VHT20 Beam Forming, M8 to M15	3	13	-55.7	-53.0	-52.9		-35.7	-27	8.7
HT/VHT20 Beam Forming, M16 to M23	3	13	-55.7	-53.0	-52.9		-35.7	-27	8.7
HT/VHT20 Beam Forming, M0 to M7	4	16	-59.0	-53.7	-53.6	-53.1	-32.1	-27	5.08
HT/VHT20 Beam Forming, M8 to M15	4	13	-55.8	-53.1	-53.2	-53.7	-34.6	-27	7.59
HT/VHT20 Beam Forming, M16 to M23	4	13	-55.8	-53.1	-53.2	-53.7	-34.6	-27	7.59
HT/VHT20 Beam Forming, M24 to M31	4	13	-55.8	-53.1	-53.2	-53.7	-34.6	-27	7.59
HT/VHT20 STBC, M0 to M7	2	13	-53.5	-52.3			-36.6	-27	9.63
HT/VHT20 STBC, M0 to M7	3	13	-55.7	-53.0	-52.9		-35.7	-27	8.7
HT/VHT20 STBC, M0 to M7	4	13	-55.8	-53.1	-53.2	-53.7	-34.6	-27	7.59
HE20, M0 to M9 1ss	1	13	-44.4				-31.2	-27	4.18
HE20, M0 to M9 1ss	2	13	-54.5	-49.2			-34.9	-27	7.86
HE20, M0 to M9 2ss	2	13	-54.5	-49.2			-34.9	-27	7.86
HE20, M0 to M9 1ss	3	13	-57.9	-52.8	-52.4		-35.8	-27	8.77
HE20, M0 to M9 2ss	3	13	-54.0	-48.2	-49.4		-31.9	-27	4.93
HE20, M0 to M9 3ss	3	13	-54.0	-48.2	-49.4		-31.9	-27	4.93
HE20, M0 to M9 1ss	4	13	-59.8	-52.9	-51.3	-53.6	-34.2	-27	7.24
HE20, M0 to M9 2ss	4	13	-56.7	-53.5	-53.4	-50.1	-33.6	-27	6.57
HE20, M0 to M9 3ss	4	13	-56.7	-53.5	-53.4	-50.1	-33.6	-27	6.57
HE20, M0 to M9 4ss	4	13	-56.7	-53.5	-53.4	-50.1	-33.6	-27	6.57
HE20 Beam Forming, M0 to M9 1ss	2	13	-54.5	-49.2			-34.9	-27	7.86
HE20 Beam Forming, M0 to M9 2ss	2	13	-54.5	-49.2			-34.9	-27	7.86

HE20 Beam Forming, M0 to M9 1ss	3	16	-57.9	-52.8	-52.4		-32.8	-27	5.77
HE20 Beam Forming, M0 to M9 2ss	3	13	-54.0	-48.2	-49.4		-31.9	-27	4.93
HE20 Beam Forming, M0 to M9 3ss	3	13	-54.0	-48.2	-49.4		-31.9	-27	4.93
HE20 Beam Forming, M0 to M9 1ss	4	16	-59.8	-52.9	-51.3	-53.6	-31.2	-27	4.24
HE20 Beam Forming, M0 to M9 2ss	4	13	-56.7	-53.5	-53.4	-50.1	-33.6	-27	6.57
HE20 Beam Forming, M0 to M9 3ss	4	13	-56.7	-53.5	-53.4	-50.1	-33.6	-27	6.57
HE20 Beam Forming, M0 to M9 4ss	4	13	-56.7	-53.5	-53.4	-50.1	-33.6	-27	6.57
HE20 STBC, M0 to M9 2ss	2	13	-54.5	-49.2			-34.9	-27	7.86
HE20 STBC, M0 to M9 2ss	3	13	-54.0	-48.2	-49.4		-31.9	-27	4.93
HE20 STBC, M0 to M9 2ss	4	13	-56.7	-53.5	-53.4	-50.1	-33.6	-27	6.57

Data Screenshots

5310 MHz: HT/VHT40, M8 to M15




The screenshot displays the Keysight Spectrum Analyzer software interface. The main window shows a frequency spectrum plot with a peak at 5.42793 GHz, labeled 'Mkr 2 5.42793 GHz -47.75 dBm'. The x-axis is frequency in GHz, ranging from 5.310000 to 5.460000. The y-axis is power in dBm, ranging from -90 to 140. The plot shows a sharp peak at 5.42793 GHz. The interface includes various controls for frequency, span, and markers. The top bar shows 'Spectrum Analyzer 1' and 'Sweep SA'. The left sidebar has 'Keysight' and 'Sweep SA' tabs. The right sidebar has 'Frequency' and 'Settings' tabs. The bottom status bar shows 'Aug 05, 2021 7:30:26 AM'.

[illegible][illegible]

Page No: 94 of 106

5310 MHz: HT/VHT40 Beam Forming, M8 to M15

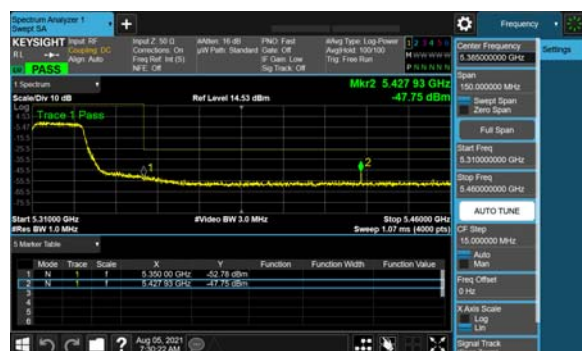

Antenna A



Antenna B




Antenna C


Appendix B: Emission Test Results

Testing Laboratory: Cisco Systems, Inc., 125 West Tasman Drive, San Jose, CA 95134, USA

Radiated Emission Setup Diagram-Below 1G

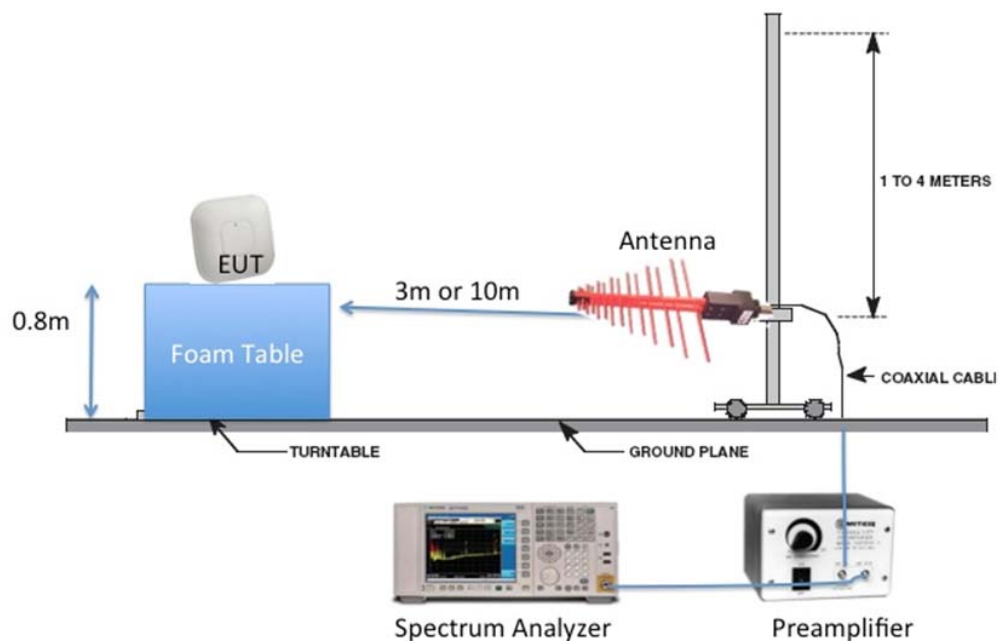

Radiated Emission Setup Diagram-Above 1G

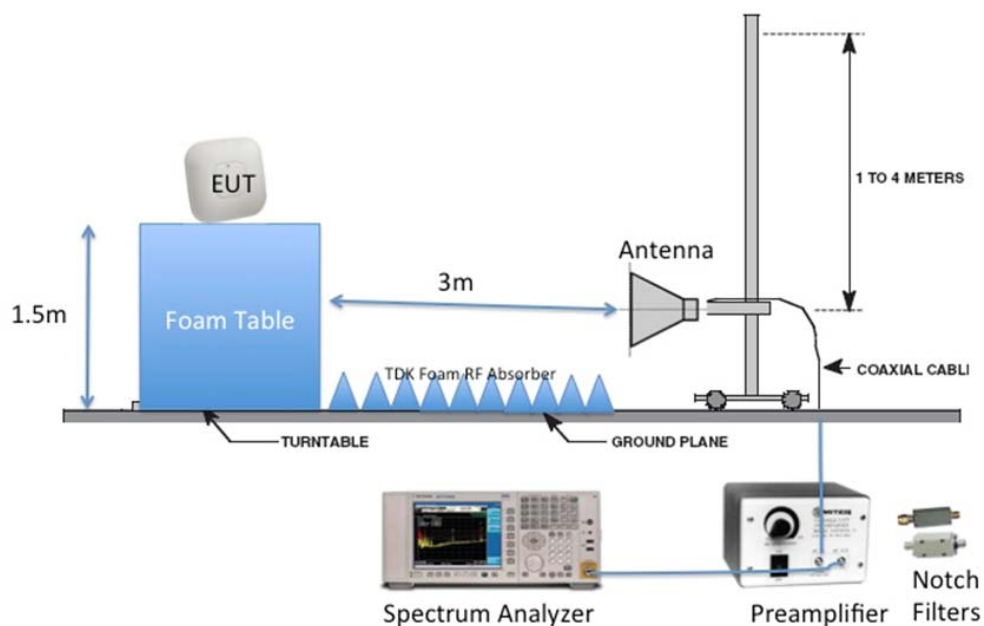

B.1: Radiated Spurious Emissions

FCC 15.205 | 15.407

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Not covered by the scope of this test report.

B.2: Radiated Emissions 30MHz to 1GHz**FCC 15.209 | 15.205 | 15.407**

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Ref. ANSI C63.10: 2013 section 6.5

Not covered by the scope of this test report.

B.3: AC Conducted Emissions

FCC 15.207

Except when the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply, either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table in these sections. The more stringent limit applies at the frequency range boundaries.

Measurement Procedure:

Accordance with ANSI C63.10:2013 section 6.2

Not covered by the scope of this test report.

Appendix C: List of Test Equipment Used to perform the test

Equip#	Manufacturer/ Model	Description	Last Cal	Next Due	Test Item
Test Equipment used for conducted tests – Rack 2					
49515	Keysight (Agilent/HP)/N5182B	MXG X-Series RF Vector Signal Generator	16-Oct-20	16-Oct-21	A.1-A.6
49516	Keysight/ (Agilent/HP)/ N9030A-550	PXA Signal Analyzer, 3Hz to 50GHz	11-Nov-20	11-Nov-21	A.1-A.6
57476	Cisco/Automatio n Test Insertion Loss	Rack 2	Verify Before Use	Verify Before Use	A.1-A.6
46065	National Instruments/ PXI-1042Q	8 slot PXI chassis	Cal Not Required	Cal Not Required	A.1-A.6
57237	National Instruments/ PXI-8115	Embedded Controller	Cal Not Required	Cal Not Required	A.1-A.6
54686	National Instruments/ PXI-2796	40 GHz Dual 6x1 Multiplexer (SP6T)	Verify Before Use	Verify Before Use	A.1-A.6
57245	National Instruments/ PXI-2799	Switch 1x1	Verify Before Use	Verify Before Use	A.1-A.6
56091	National Instruments/ PXI-2796	40 GHz Dual 6x1 Multiplexer (SP6T)	Verify Before Use	Verify Before Use	A.1-A.6
54235	PASTERNAK/ PE5019-1	Torque Wrench	9-Mar-21	9-Mar-22	A.1-A.6
58256	COMET/ T7611- 4	WEB SENSOR FOR REMOTE THERMOMETE R HYGROMETER	3-Feb-21	3-Feb-22	A.1-A.6

Equip#	Manufacturer/ Model	Description	Last Cal	Next Due	Test Item
Test Equipment used for conducted tests – Rack 3					
55108	Keysight/ (Agilent/HP)/ N9030A-550	PXA Signal Analyzer, 3Hz to 50GHz	03-Feb-21	03-Feb-22	A.1-A.6
57476	Cisco/Automatio n Test Insertion Loss	Rack 3	Verify Before Use	Verify Before Use	A.1-A.6
55093	National Instruments/ PXI-1042Q	8 slot PXI chassis	Cal Not Required	Cal Not Required	A.1-A.6
57238	National Instruments/ PXI-8115	Embedded Controller	Cal Not Required	Cal Not Required	A.1-A.6
57247	National Instruments/ PXI-2796	40 GHz Dual 6x1 Multiplexer (SP6T)	Verify Before Use	Verify Before Use	A.1-A.6
57248	National Instruments/ PXI-2799	Switch 1x1	Verify Before Use	Verify Before Use	A.1-A.6
56092	National Instruments/ PXI-2796	40 GHz Dual 6x1 Multiplexer (SP6T)	Verify Before Use	Verify Before Use	A.1-A.6
54235	PASTERNAK/ PE5019-1	Torque Wrench	9-Mar-21	9-Mar-22	A.1-A.6
58256	COMET/ T7611- 4	WEB SENSOR FOR REMOTE THERMOMETE R HYGROMETER	3-Feb-21	3-Feb-22	A.1-A.6

Equip#	Manufacturer/ Model	Description	Last Cal	Next Due	Test Item
Test Equipment used for conducted tests – Rack 8					
58720	Cisco/Automation Test Insertion Loss	Rack 8	Verify Before Use	Verify Before Use	A.1-A.6
57562	Keysight (Agilent/HP) / N9030B-550 OPT LNP EP0	PXA Signal Analyzer, 2Hz-50GHz with Options LNP and EP0	28-Jul-21	28-Jul-22	A.1-A.6
58205	NATIONAL INSTRUMENTS / PXIe-1062Q	CHASSIS	Cal Not Required	Cal Not Required	A.1-A.6
58206	NATIONAL INSTRUMENTS / PXIe-8840	Up to 2.6 GHz Quad-Core PXI Express Controller	Cal Not Required	Cal Not Required	A.1-A.6
58208	NATIONAL INSTRUMENTS / PXI-2796	40 GHz Dual 6x1 Multiplexer (SP6T)	Verify Before Use	Verify Before Use	A.1-A.6
58210	NATIONAL INSTRUMENTS / PXI-2796	40 GHz Dual 6x1 Multiplexer (SP6T)	Verify Before Use	Verify Before Use	A.1-A.6
58211	NATIONAL INSTRUMENTS / PXI-2799	Switch 1x1	Verify Before Use	Verify Before Use	A.1-A.6
54235	PASTERNAK/PE5019-1	Torque Wrench	9-Mar-21	9-Mar-22	A.1-A.6
58256	COMET/ T7611-4	WEB SENSOR FOR REMOTE THERMOMETER HYGROMETER	3-Feb-21	3-Feb-22	A.1-A.6

Equipment #	Manufacturer/ Model	Description	Last Cal	Next Due	Test Item
Test Equipment used for conducted tests – Rack 9					
58719	Cisco/Automation Test Insertion Loss	Rack 9	Verify Before Use	Verify Before Use	A.1-A.6
53614	Keysight (Agilent/HP)/N9030B-550 OPT LNP EP0	PXA Signal Analyzer, 2Hz-50GHz with Options LNP and EP0	1-Jul-21	1-Jul-22	A.1-A.6
58231	NATIONAL INSTRUMENTS / PXIe-1062Q	CHASSIS	Cal Not Required	Cal Not Required	A.1-A.6
58232	NATIONAL INSTRUMENTS / PXIe-8840	Up to 2.6 GHz Quad-Core PXI Express Controller	Cal Not Required	Cal Not Required	A.1-A.6
58234	NATIONAL INSTRUMENTS / PXI-2796	40 GHz Dual 6x1 Multiplexer (SP6T)	Verify Before Use	Verify Before Use	A.1-A.6
58236	NATIONAL INSTRUMENTS / PXI-2796	40 GHz Dual 6x1 Multiplexer (SP6T)	Verify Before Use	Verify Before Use	A.1-A.6
58237	NATIONAL INSTRUMENTS / PXI-2799	Switch 1x1	Verify Before Use	Verify Before Use	A.1-A.6
54235	PASTERNAK/PE5019-1	Torque Wrench	9-Mar-21	9-Mar-22	A.1-A.6
58256	COMET/ T7611-4	WEB SENSOR FOR REMOTE THERMOMETER HYGROMETER	3-Feb-21	3-Feb-22	A.1-A.6

Equip#	Manufacturer/ Model	Description	Last Cal	Next Due	Test Item
Test Equipment used for conducted tests – Rack 4					
57478	Cisco/Automation Test Insertion Loss	Rack 4	Verify Before Use	Verify Before Use	A.1-A.6
58702	Keysight (Agilent/HP)/ N9030B-550	PXA Signal Analyzer, 2Hz- 50GHz	15-Oct-20	15-Oct-21	A.1-A.6
55096	National Instruments/ PXI- 1042	CHASSIS, PXI	Cal Not Required	Cal Not Required	A.1-A.6
57239	National Instruments/ PXI- 8115	Embedded Controller	Cal Not Required	Cal Not Required	A.1-A.6
57250	National Instruments/ PXI- 2796	40 GHz Dual 6x1 Multiplexer (SP6T)	Verify Before Use	Verify Before Use	A.1-A.6
57251	National Instruments/ PXI- 2799	Switch 1x1	Verify Before Use	Verify Before Use	A.1-A.6
56093	National Instruments/ PXI-2796	40 GHz Dual 6x1 Multiplexer (SP6T)	Verify Before Use	Verify Before Use	A.1-A.6
54235	PASTERNAK/ PE5019-1	Torque Wrench	9-Mar-21	9-Mar-22	A.1-A.6
58256	COMET/ T7611- 4	WEB SENSOR FOR REMOTE THERMOMETER HYGROMETER	3-Feb-21	3-Feb-22	A.1-A.6

Appendix D: Abbreviation Key and Definitions

The following table defines abbreviations used within this test report.

Abbreviation	Description	Abbreviation	Description
EMC	Electro Magnetic Compatibility	°F	Degrees Fahrenheit
EMI	Electro Magnetic Interference	°C	Degrees Celsius
EUT	Equipment Under Test	Temp	Temperature
ITE	Information Technology Equipment	S/N	Serial Number
TAP	Test Assessment Schedule	Qty	Quantity
ESD	Electro Static Discharge	emf	Electromotive force
EFT	Electric Fast Transient	RMS	Root mean square
EDCS	Engineering Document Control System	Qp	Quasi Peak
Config	Configuration	Av	Average
CIS#	Cisco Number (unique identification number for Cisco test equipment)	Pk	Peak
Cal	Calibration	kHz	Kilohertz (1x10 ³)
EN	European Norm	MHz	MegaHertz (1x10 ⁶)
IEC	International Electro technical Commission	GHz	Gigahertz (1x10 ⁹)
CISPR	International Special Committee on Radio Interference	H	Horizontal
CDN	Coupling/Decoupling Network	V	Vertical
LISN	Line Impedance Stabilization Network	dB	decibel
PE	Protective Earth	V	Volt
GND	Ground	kV	Kilovolt (1x10 ³)
L1	Line 1	μV	Microvolt (1x10 ⁻⁶)
L2	Line2	A	Amp
L3	Line 3	μA	Micro Amp (1x10 ⁻⁶)
DC	Direct Current	mS	Milli Second (1x10 ⁻³)
RAW	Uncorrected measurement value, as indicated by the measuring device	μS	Micro Second (1x10 ⁻⁶)
RF	Radio Frequency	μS	Micro Second (1x10 ⁻⁶)
SLCE	Signal Line Conducted Emissions	m	Meter
Meas dist	Measurement distance	Spec dist	Specification distance
N/A or NA	Not Applicable	SL	Signal Line (or Telecom Line)
P	Power Line	L	Live Line
N	Neutral Line	R	Return
S	Supply	AC	Alternating Current

Appendix E: Photographs of Test Setups

EUT Photos have been omitted from this test report. Photos can be found in the supplementary exhibit included in the submission and EDCS# 22609793.

Appendix F: Software Used to Perform Testing

Cisco Internal LabView Radio Test Automation Software:

RF Automation Main versions: 230, 232, 233, 234
RF Domain Report Generation - version 3

Appendix G: Test Procedures

Measurements were made in accordance with:

- KDB Publication No. 789033 - D02 General UNII Test Procedures New Rules v02r01
- KDB Publication No. 662911 - MIMO
- ANSI C63.4 2014 Unintentional Radiators
- ANSI C63.10 2013 Intentional Radiators

Test procedures are summarized below:

FCC 5GHz Test Procedures	EDCS # 1445048
FCC 5GHz RSE Test Procedures	EDCS # 1511600

Appendix H: Scope of Accreditation (A2LA certificate number 1178-01)

The scope of accreditation of Cisco Systems, Inc. can be found on the A2LA web page at:

<http://www.a2la.org/scopepdf/1178-01.pdf>

Appendix I: Test Assessment Plan

Compliance Test Plan (Excel) EDCS# 21468207
Target Power Tables EDCS# 21389500

Appendix J: Worst Case Justification

N/A

End