

Specific Absorption Rate (SAR) Test Report

for
AboCom System, Inc.
on the
802.11b Wireless LAN/Disk
Model Number: WBD512


Test Report: EME-031156
Date of Report: Oct. 17, 2003
Date of test: Oct. 16, 2003

Total No of Pages Contained in this Report: 83



0597
ILAC MRA

Accredited for testing to FCC Part 15

Tested by: Kevin Chen	
Reviewed by: Elton Chen	

Review Date: Oct. 17, 2003

All services undertaken are subject to the following general policy: Reports are submitted for exclusive use of the client to whom they are addressed. Their significance is subject to the adequacy and representative character of the samples and to the comprehensiveness of the tests, examinations or surveys made. This report shall not be reproduced except in full, without written consent of Intertek Testing Services, Taiwan Ltd.

Table of Contents

STATEMENT OF COMPLIANCE.....	3
1.0 Job Description	4
1.1 Client Information.....	4
1.2 Equipment under test (EUT).....	4
Portable	4
1.3 Test plan reference	5
1.4 System test configuration.....	5
1.4.1 System block diagram & Support equipment	5
1.4.2 Test Position	6
1.4.3 Test Condition	6
1.5 Modifications required for compliance	8
1.6 Additions, deviations and exclusions from standards	8
2.0 SAR Evaluation	9
2.1 SAR Limits	9
2.2 Configuration Photographs	10
2.3 SAR measurement system	18
2.4 SAR measurement system validation	19
2.5 Test Result.....	20
3.0 Test Equipment	23
3.1 Equipment List.....	23
3.2 Body Tissue Simulating Liquid for evaluation test.....	24
3.3 Head Tissue Simulating Liquid for System performance Check test	25
3.4 E-Field Probe and 2450MHz Balanced Dipole Antenna Calibration	25
3.5 Measurement Uncertainty	26
3.6 Measurement Traceability.....	27
4.0 WARNING LABEL INFORMATION - USA	28
5.0 REFERENCES	29
6.0 DOCUMENT HISTORY	30
APPENDIX A - SAR Evaluation Data	31
APPENDIX B – 2450MHz body liquid Calibration Data	49
APPENDIX C - E-Field Probe and 2450MHz Balanced dipole antenna Certificate and Calibration Data	56

STATEMENT OF COMPLIANCE

The AboCom sample device, model # WBD512 was evaluated in accordance with the requirements for compliance testing defined in FCC OET Bulletin 65, Supplement C (Edition 01-01). Testing was performed at the Intertek Testing Services facility in Hsinchu, Taiwan.

For the evaluation, the dosimetric assessment system INDEXSAR SARA2 was used. The phantom employed was the box phantom of 2mm thick in one wall. The total uncertainty for the evaluation of the spatial peak SAR values averaged over a cube of 1g tissue mass had been assessed for this system to be $\pm 29.7\%$.

The device was tested at their maximum output power declared by the AboCom.

In summary, the maximum spatial peak SAR value for the sample device averaged over 1g was found to be:

Phantom	Position	SAR _{1g} , mW/g
2mm thick box phantom wall	EUT bottom to the phantom, 0 mm separation.	0.364 mW/g.

In conclusion, the tested Sample device was found to be in compliance with the requirements defined in OET Bulletin 65, Supplement C (Edition 01-01) for body configurations.

1.0 Job Description

1.1 Client Information

The WBD512 has been tested at the request of:

Company: AboCom System, Inc.
300 1F, No. 21, R&D Rd. II, SBIP, Hsin-Chu,
Taiwan

1.2 Equipment under test (EUT)

Product Descriptions:

Equipment	802.11b Wireless LAN/Disk		
Trade Name	AboCom	Model No:	WBD512
FCC ID	MQ4WBD512	S/N No.	Not Labeled
Category	Portable	RF Exposure	Uncontrolled Environment
Frequency Band	2412 – 2462 MHz	System	DSSS

EUT Antenna Description			
Type	PCB Printed antenna	Configuration	Fixed
Dimensions	92 x 33 mm	Gain	-1.88 dBi
Location	Embedded		

Use of Product : Wireless Data Communication

Manufacturer: AboCom

Production is planned: [X] Yes, [] No

EUT receive date: Oct. 13, 2003

EUT received condition: Good operating condition prototype

Test start date: Oct. 16, 2003

Test end date: Oct. 16, 2003

1.3 Test plan reference

FCC Rule: Part 2.1093, FCC's OET Bulletin 65, Supplement C (Edition 01-01)

1.4 System test configuration

1.4.1 System block diagram & Support equipment

Support Equipment				
Item #	Equipment	Brand	Model No.	S/N
1	Notebook	DELL	PP01L	CN-03P83-48643-33O-3930
2	Notebook	DELL	PP02X	8Y210A04



EUT



EUT

1.4.2 Test Position

See the photographs as section 2.2

1.4.3 Test Condition

Usage	Operates with a portable computer	Distance between antenna axis at the joint and the liquid surface:	Laptop is touching the Phantom in bottom position, perpendicular 0mm, perpendicular 15mm	
Simulating human Head/ Body/Hand	Body	EUT Battery	Device is powered from host computer through battery.	
WBD512 Conducted output Power	Channel	Frequency MHz	Before SAR Test (dBm)	After SAR Test (dBm)
	Low Channel - 1	2412	19.22	-
	Mid Channel - 6	2437	18.93	18.92
	High Channel- 11	2462	18.72	-
WUB1600 Conducted output Power	Channel	Frequency MHz	Before SAR Test (dBm)	After SAR Test (dBm)
	Low Channel - 1	2412	18.67	-
	Mid Channel - 6	2437	18.78	18.77
	High Channel- 11	2462	18.05	-

The spatial peak SAR values were assessed for lowest, middle and highest operating channels, defined by the manufacturer.

The conducted output power was measured before and after the test using a diode detector, oscilloscope and signal generator.

WBD512 is a 802.11b USB adapter, it's integrated a flash disk, and they can NOT operate at the same time.

There are 4 types of memory size for WBD512, which are 64MB, 128MB, 256MB and 512MB. After verifying the 4 types of memory size of WBD512, the worst case is found in 512MB.

We verified that WUB1600 is identical to WBD512 at the RF function, the only difference is WUB1600 without the Disk function.

Each model has it's own product name for marketing purpose and listed as below:

Model No.	Product Name	Product Description
WBD512	802.11b Wireless LAN/Disk	802.11b with 512MB disk
WBD512	802.11b Wireless LAN/Disk	802.11b with 256MB disk
WBD512	802.11b Wireless LAN/Disk	802.11b with 128MB disk
WBD512	802.11b Wireless LAN/Disk	802.11b with 64MB disk
WUB1600	802.11b Wireless LAN USB Adapter	802.11b function only

The EUT was transmitted continuously during the test.

After verifying the maximum output power, we found the maximum output power was occurred at 11Mbps data rate.

All the test data were performed under the above transmission rate.

1.5 Modifications required for compliance

Intertek Testing Services implemented no modifications.

1.6 Additions, deviations and exclusions from standards

The phantom employed was the box phantom of 2mm thick in vertical wall.

2.0 SAR Evaluation

2.1 SAR Limits

The following FCC limits for SAR apply to devices operate in General Population/Uncontrolled Exposure environment:

EXPOSURE (General Population/Uncontrolled Exposure environment)	SAR (W/kg)
Average over the whole body	0.08
Spatial Peak (1g)	1.60
Spatial Peak for hands, wrists, feet and ankles (10g)	4.00

2.2 Configuration Photographs

SAR Measurement Test Setup


Test System




Test Model: WBD512

SAR Measurement Test Setup

Bottom side of Laptop facing phantom touching

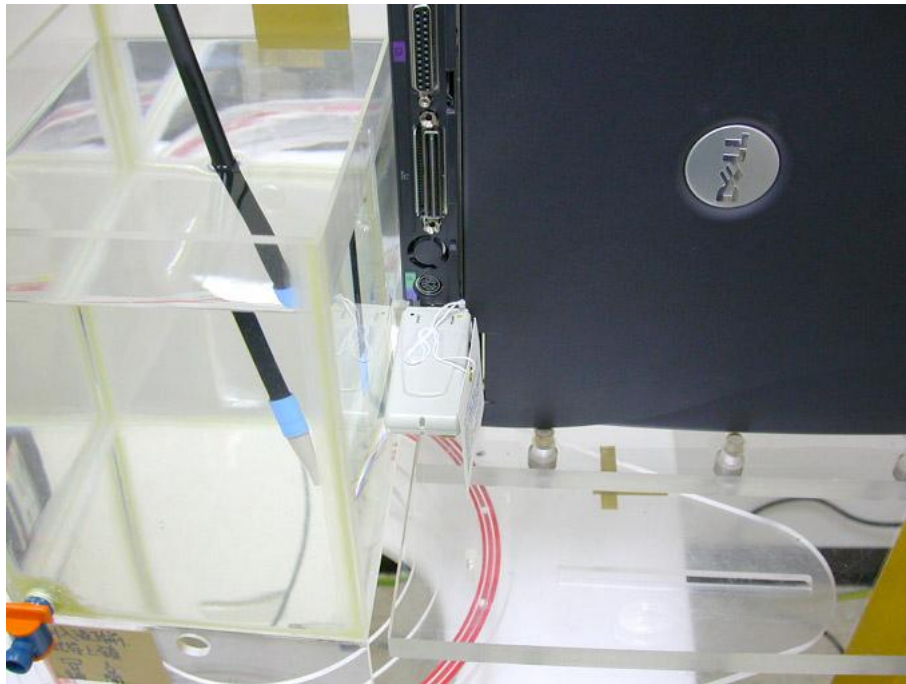


Bottom side of Laptop facing phantom touching – Zoom In

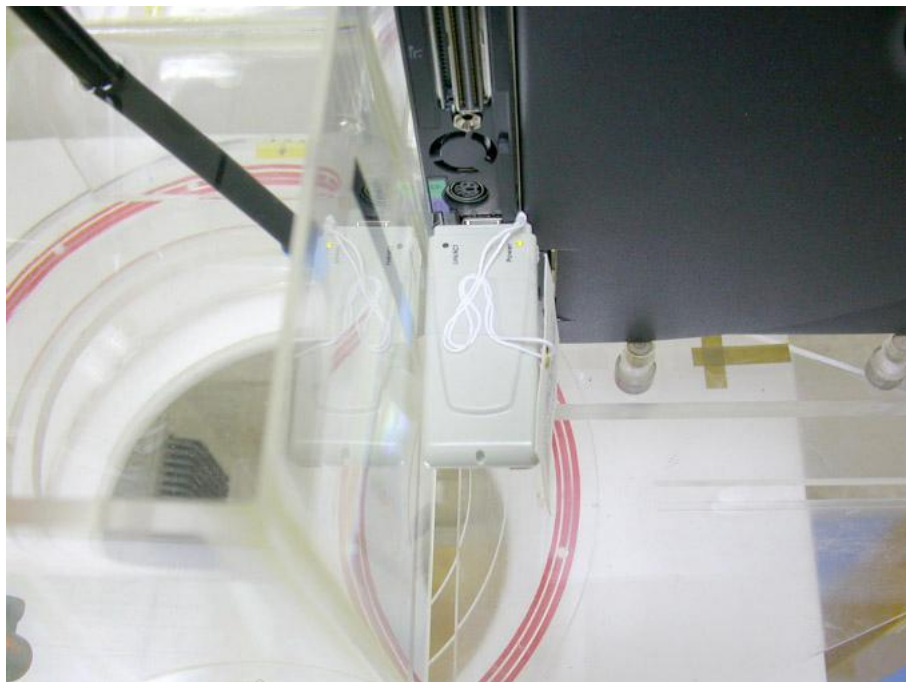

SAR Measurement Test Setup


Bottom side of Laptop facing phantom touching

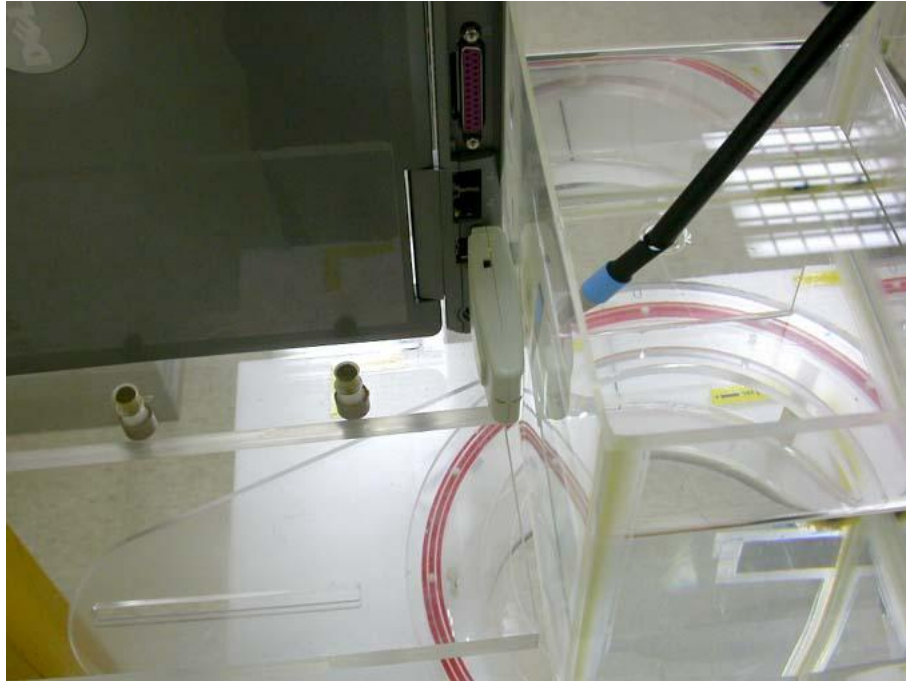


Bottom side of Laptop facing phantom touching – Zoom In




**SAR Measurement Test Setup
EUT perpendicular to phantom, 0 mm separation**

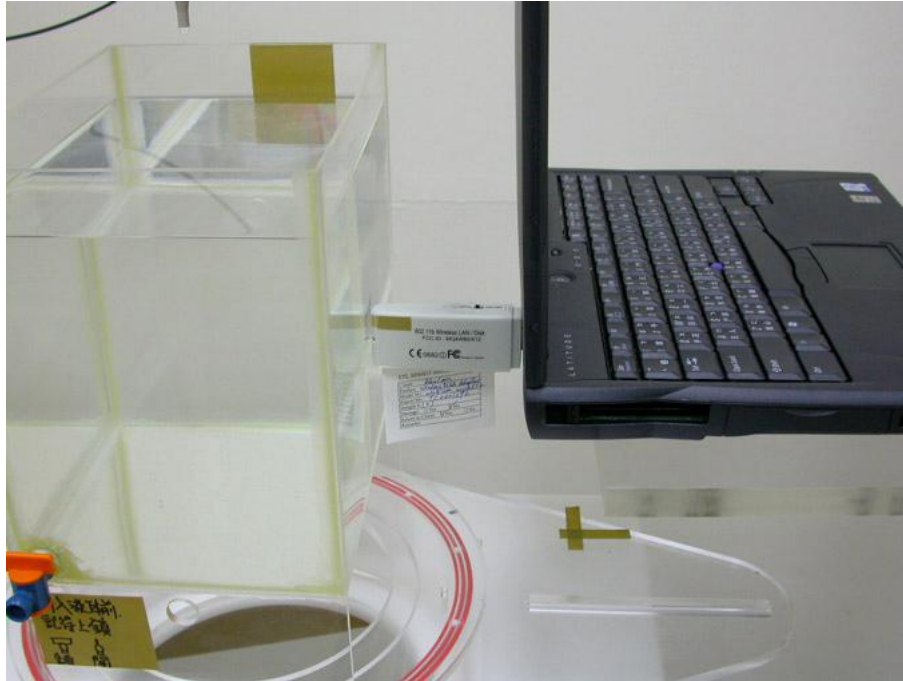


EUT perpendicular to phantom, 0 mm separation – Zoom In

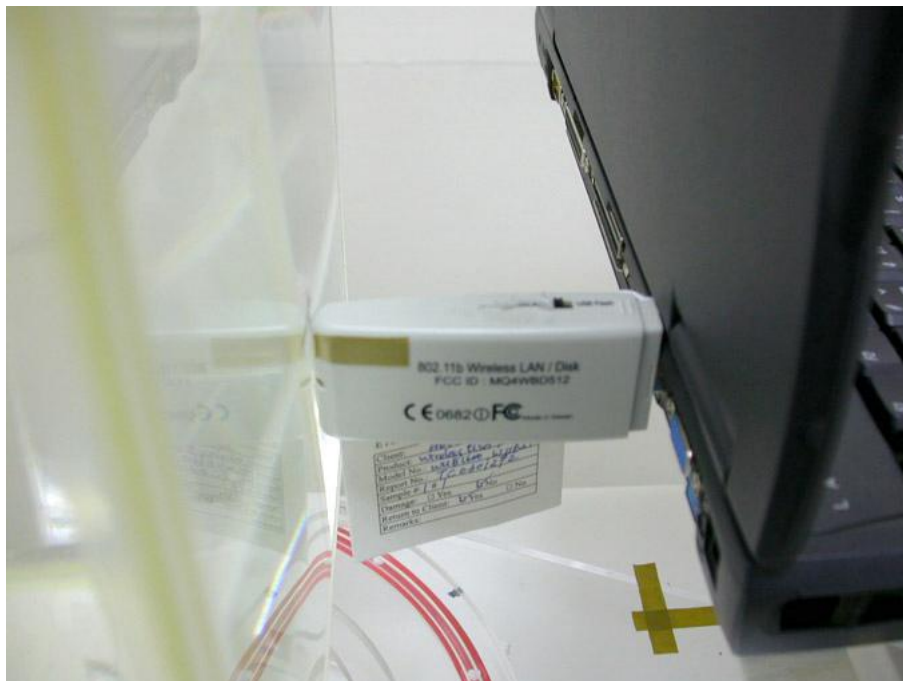

SAR Measurement Test Setup
EUT perpendicular to phantom, 15 mm separation

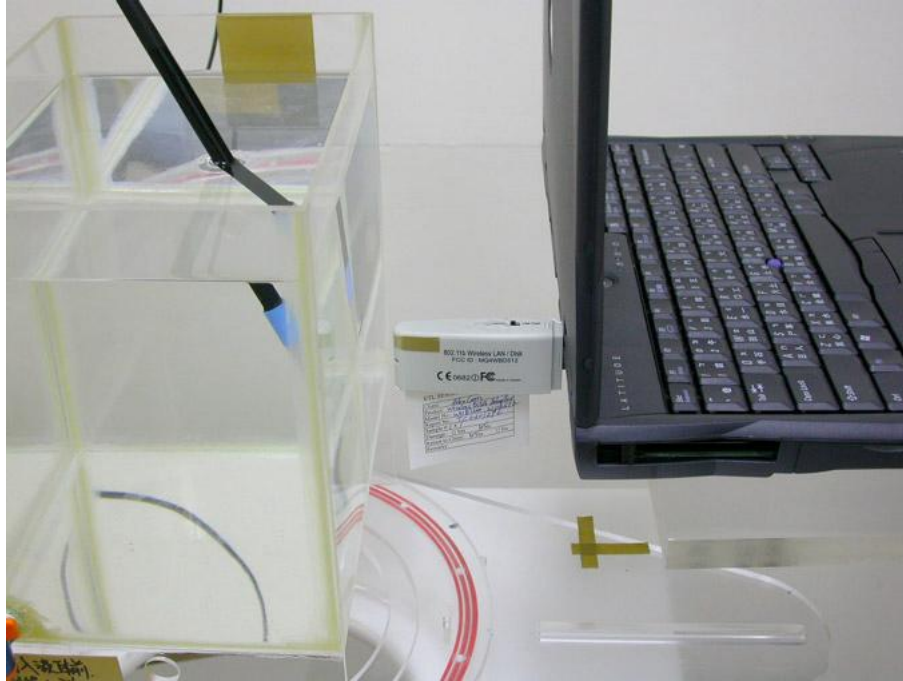


EUT perpendicular to phantom, 15 mm separation– Zoom In

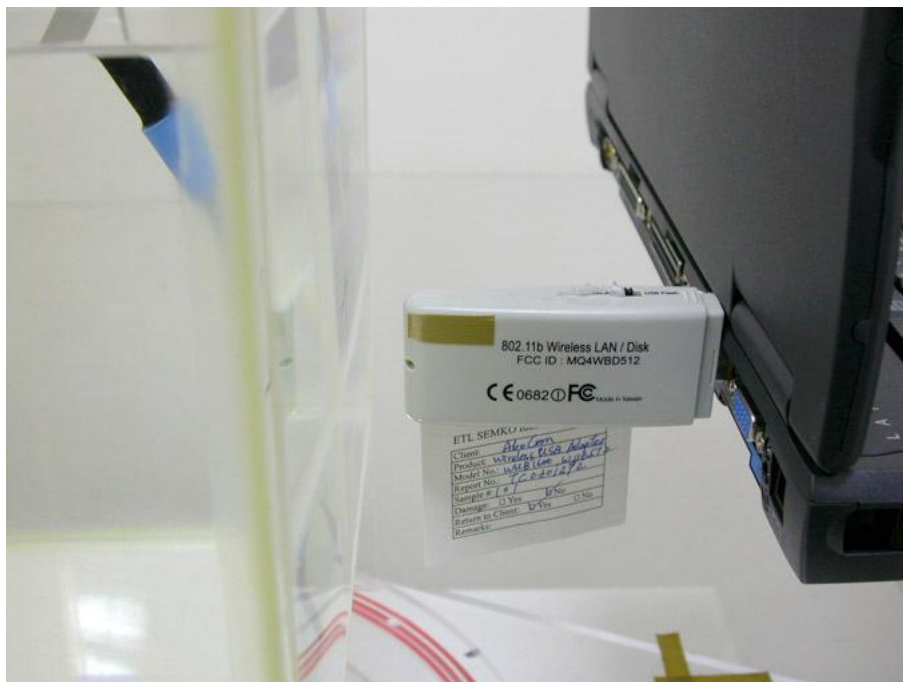


SAR Measurement Test Setup

Bottom side of Laptop facing phantom touching

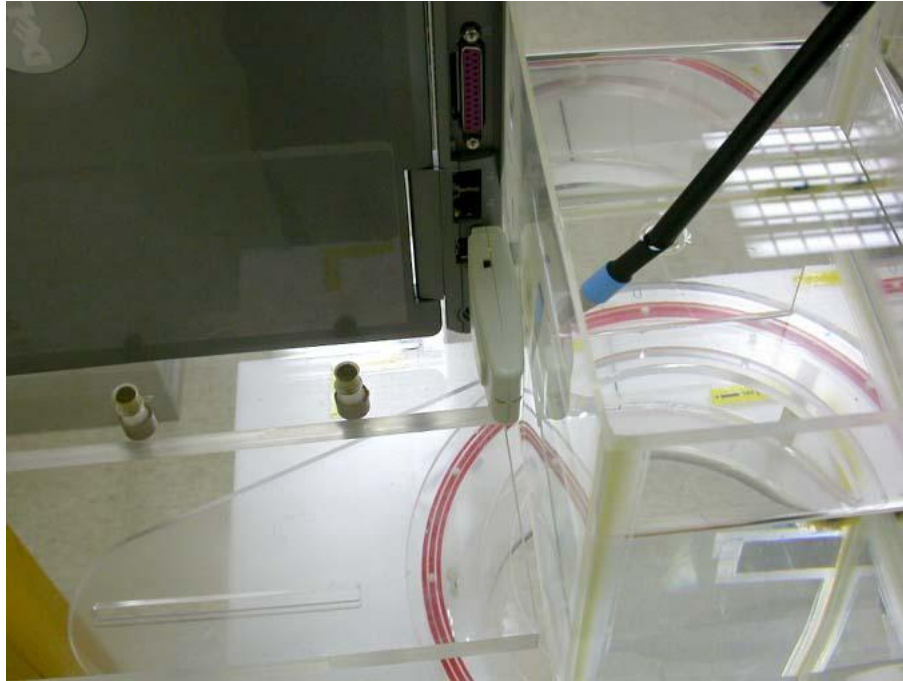

Bottom side of Laptop facing phantom touching – Zoom In

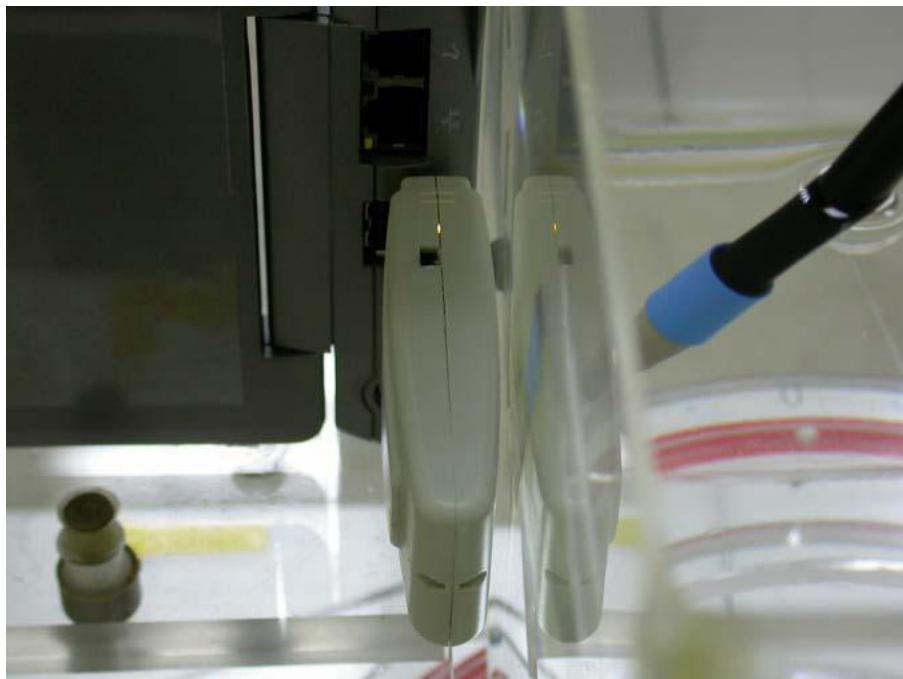


**SAR Measurement Test Setup
EUT perpendicular to phantom, 0 mm separation**



EUT perpendicular to phantom, 0 mm separation – Zoom In



SAR Measurement Test Setup
EUT perpendicular to phantom, 15 mm separation

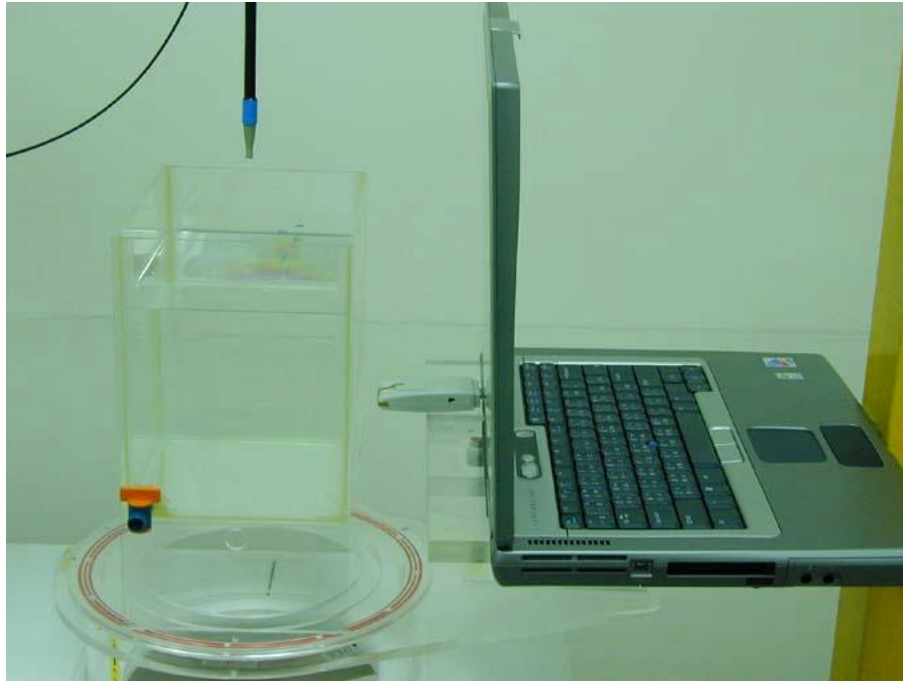

EUT perpendicular to phantom, 15 mm separation– Zoom In



2.3 SAR measurement system

Robot system specification

The SAR measurement system being used is the IndexSAR SARA2 system, which consists of a Mitsubishi RV-E2 6-axis robot arm and controller, IndexSAR probe and amplifier and SAM phantom Head Shape. The robot is used to articulate the probe to programmed positions inside the phantom head to obtain the SAR readings from the DUT.

The system is controlled remotely from a PC, which contains the software to control the robot and data acquisition equipment. The software also displays the data obtained from test scans.

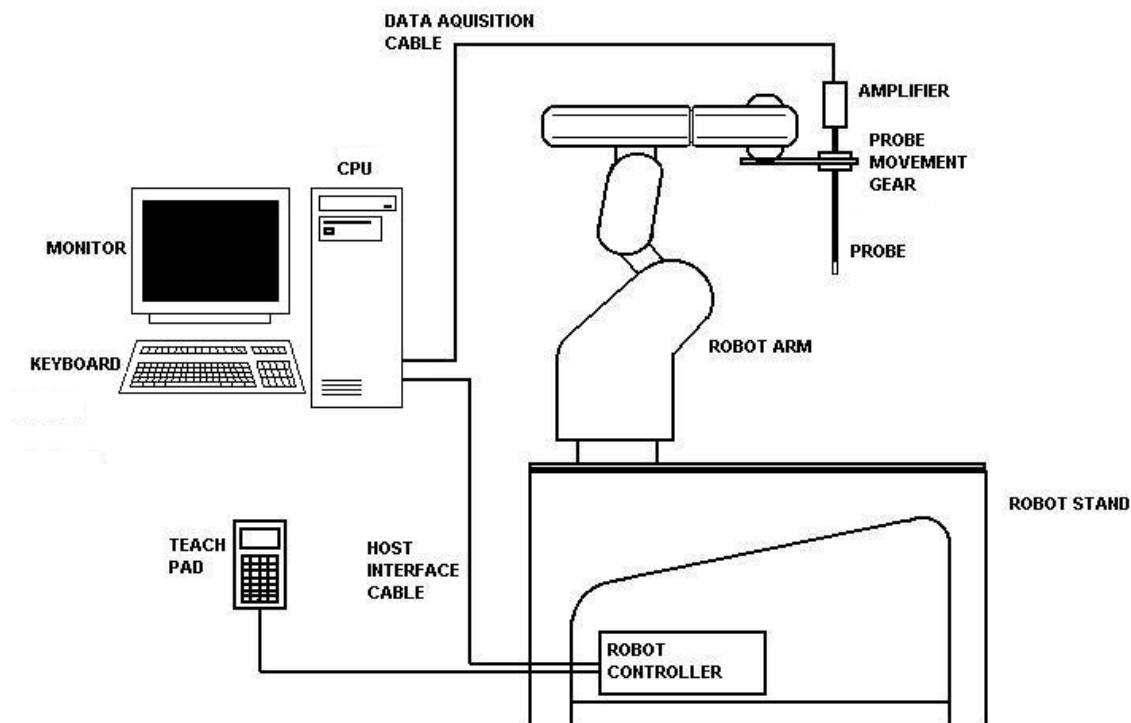


Figure 1: Schematic diagram of the SAR measurement system

The position and digitised shape of the phantom heads are made available to the software for accurate positioning of the probe and reduction of set-up time.

The SAM phantom heads are individually digitised using a Mitutoyo CMM machine to a precision of 0.02mm. The data is then converted into a shape format for the software, providing an accurate description of the phantom shell.

In operation, the system first does an area (2D) scan at a fixed depth within the liquid from the inside wall of the phantom. When the maximum SAR point has been found, the system will then carry out a 3D scan centred at that point to determine volume averaged SAR level.

2.4 SAR measurement system validation

Prior to the assessment, the system was verified to the $\pm 10\%$ of the specifications by using the system validation equipments. The validation was performed at 2450 MHz on the bottom side of box phantom.

Procedures

The SAR evaluation was performed with the following procedures:

- a. The SAR distribution was measured at the exposed side of the bottom of the box phantom and was measured at a distance of 8 mm from the inner surface of the shell. The feed power was 1/4W.
- b. The dimension for this cube is 32 mm x 32 mm x 34 mm was assessed by measuring 5 x 5 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure:
 - i) The data at the surface were extrapolated, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measurement point is 5 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in Z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
 - ii) The maximum interpolated value was searched with a straightforward algorithm. Around this maximum, the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3-D spline interpolation algorithm. The 3-D spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y and z directions). The volume was integrated with the trapezoidal algorithm. 1000 points (10 x 10 x 10) were interpolated to calculate the average.
 - iii) All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

System Validation (2450 MHz Head)					
Frequency MHz	Operating Mode	Target SAR _{1g} (mW/g)	Measured SAR _{1g} (mW/g)	Deviation ($\pm 10\%$)	Plot Number
2450	CW	52.4	54.688	4.36%	1

Measured on Oct. 15, 2003

System performance check (2450 MHz Head)					
Frequency MHz	Operating Mode	Target SAR _{1g} (mW/g)	Measured SAR _{1g} (mW/g)	Deviation ($\pm 10\%$)	Plot Number
2450	CW	52.4	54.688	4.36%	2

Measured on Nov. 16, 2003

System performance check (2450 MHz Head)					
Frequency MHz	Operating Mode	Target SAR _{1g} (mW/g)	Measured SAR _{1g} (mW/g)	Deviation (±10%)	Plot Number
2450	CW	52.4	55.936	6.75%	2

2.5 Test Result

The results on the following page(s) were obtained when the device was tested in the condition described in this report. Detailed measurement data and plots, which reveal information about the location of the maximum SAR with respect to the device, are reported in Appendix A.

Measurement Results

Trade Name:	AboCom	Model No.:	WBD512
Serial No.:	Not Labeled	Test Engineer:	Kevin Chen
TEST CONDITIONS			
Ambient Temperature	24 °C	Relative Humidity	50 %
Test Signal Source	Test Mode	Signal Modulation	DSSS
Output Power Before SAR Test	See page 6	Output Power After SAR Test	See page 6
Test Duration	22 min. each scan	Number of Battery Change	1

EUT Position						
Channel (MHz)	Operating Mode	Crest Factor	Description	Distance (mm)	Measured SAR_{1g} (mW/g)	Plot Number
2437	DSSS	1	Bottom to phantom	0	0.160	3
2437	DSSS	1	Bottom to phantom	0	0.364	4
2437	DSSS	1	Perpendicular to phantom	15	0.030	5
2437	DSSS	1	Perpendicular to phantom	0	0.189	6

Note: 1. The distance from bottom of EUT to flat phantom is 3 mm.
2. Configuration at middle channel with more than -3dB of applicable limit.

Trade Name:	AboCom	Model No.:	WUB1600
Serial No.:	Not Labeled	Test Engineer:	Kevin Chen
TEST CONDITIONS			
Ambient Temperature	24 °C	Relative Humidity	50 %
Test Signal Source	Test Mode	Signal Modulation	DSSS
Output Power Before SAR Test	See page 6	Output Power After SAR Test	See page 6
Test Duration	22 min. each scan	Number of Battery Change	1

EUT Position						
Channel (MHz)	Operating Mode	Crest Factor	Description	Distance (mm)	Measured SAR_{1g} (mW/g)	Plot Number
2437	DSSS	1	Bottom to phantom	0	0.344	7
2437	DSSS	1	Perpendicular to phantom	15	0.016	8
2437	DSSS	1	Perpendicular to phantom	0	0.087	9

Note: 1. The distance from bottom of EUT to flat phantom is 2 mm.
2. Configuration at middle channel with more than -3dB of applicable limit.

3.0 Test Equipment

3.1 Equipment List

The Specific Absorption Rate (SAR) tests were performed with the INDEXSAR SARA2 SYSTEM.

The following major equipment/components were used for the SAR evaluations:

SAR Measurement System			
EQUIPMENT	SPECIFICATIONS	S/N #	LAST CAL. DATE
Balanced Validation Dipole	2450MHz	0048	3/26/2003
Controller	Mitsubishi CR-E116	F1008007	N/A
Robot	Mitsubishi RV-E2	EA009002	N/A
	Repeatability: $\pm 0.04\text{mm}$; Number of Axes: 6		
E-Field Probe	IXP-050	0136	09/10/2003
	Frequency Range: Probe outer diameter: 5.2 mm; Length: 350 mm; Distance between the probe tip and the dipole center: 2.7 mm		
Data Acquisition	SARA2	N/A	N/A
	Processor: Pentium 4; Clock speed: 1.5GHz; OS: Windows XP; I/O: two RS232; Software: SARA2 ver. 0.421N		
Phantom	2mm wall thickness box phantom	N/A	N/A
	Shell Material: clear Perspex; Thickness: $2 \pm 0.1\text{ mm}$; Capacity: $152.5 \times 215.5 \times 200\text{ (W x L x D) mm}^3$; Dielectric constant: less than 2.85 above 500MHz;		
Device holder	Material: clear Perspex; Dielectric constant: less than 2.85 above 500MHz	N/A	N/A
Simulated Tissue	Mixture	N/A	Nov./17/2003
	Please see section 3.2 for details		
RF Power Meter	Boonton 4231A with 51011-EMC power sensor	79401-32482	03/21/2003
	Frequency Range: 0.03 to 8 GHz, <24dBm		
RF Power Amplifier	INDEXSAR VTL5400	0302	01/23/2003
	10MHz to 2.5GHz, Gain >30dB		
Directional Coupler	INDEXSAR VDC0830-20	0302	05/19/2003
	0.8 to 3 GHz, Max. Power<500W		
Vector Network Analyzer	HP 8753B HP 85046A	2807J04037 2729A01958	07/04/2003
	300k to 3GHz		
Signal Generator	R&S SMR27	100036	09/19/2003
	10M to 27GHz, <120dBuV		
Crystal Detector	Agilent 8472B	MY42240243	N/A
	10MHz to 18GHz		
Two Channel Digital Storage Oscilloscope	Tektronix TDS1012	C031679	08/16/2003

3.2 Body Tissue Simulating Liquid for evaluation test

Body Ingredients Frequency (2.45 GHz)	
DGBE Dilethylene Glycol Butyl Ether	26.7%
Salt	0.04%
Water	73.2%

The dielectric parameters were verified prior to assessment using the HP 85046A dielectric probe kit and the HP 8753B network Analyzer. The dielectric parameters were:

Measured on Oct. 15, 2003

Frequency (MHz)	Temp. (°C)	e _r / Relative Permittivity			s / Conductivity (mho/m)			ρ *(kg/m ³)
2450	22.4	measured	target	Δ(±5%)	measured	target	Δ(±5%)	1000
		50.69	52.7	-3.81%	1.98	1.95	1.54%	

Measured on Nov. 17, 2003

Frequency (MHz)	Temp. (°C)	e _r / Relative Permittivity			s / Conductivity (mho/m)			ρ *(kg/m ³)
2450	22.2	measured	target	Δ(±5%)	measured	target	Δ(±5%)	1000
		50.428	52.7	-4.31%	1.952	1.95	0.102%	

* Worst-case assumption

Test data is included in Appendix B.

3.3 Head Tissue Simulating Liquid for System performance Check test

Head Ingredients Frequency (2.45 GHz)	
DGBE Dilethylene Glycol	53.3%
Water	46.7%

The dielectric parameters were verified prior to assessment using the HP 85046A dielectric probe kit and the HP 8753B network Analyzer. The dielectric parameters were:

Measured on Oct. 15, 2003

Frequency (MHz)	Temp. (°C)	e _r / Relative Permittivity			s / Conductivity (mho/m)			ρ *(kg/m ³)
2450	23.2	measured	target	Δ(±5%)	measured	target	Δ(±5%)	1000
		38.122	39.2	-2.75%	1.803	1.80	-0.17	

Measured on Nov. 17, 2003

Frequency (MHz)	Temp. (°C)	e _r / Relative Permittivity			s / Conductivity (mho/m)			ρ *(kg/m ³)
2450	23.2	measured	target	Δ(±5%)	measured	target	Δ(±5%)	1000
		37.648	39.2	-3.96%	1.828	1.80	1.56	

* Worst-case assumption

3.4 E-Field Probe and 2450MHz Balanced Dipole Antenna Calibration

Probe calibration factors and dipole antenna are included in Appendix C.

3.5 Measurement Uncertainty

The uncertainty budget has been determined for the INDEXSAR SARA2 measurement system according to IEEE P1528 documents [3] and is given in the following table. The extended uncertainty (95% confidence level) was assessed to be 29.7 %

Uncertainty Component	Sec.	(dB)	Tol.(+/-)	(%)	Prob. Dist.	Divisor (descript)	Divisor (value)	c1	Standard Uncertainty (%)
Measurement System									
Probe Calibration	E 2.1			2.5	N	1 or k	1	1	2.50
Axial Isotropy	E 2.2	0.25	5.93	5.93	R	$\sqrt{3}$	1.73	0	0.00
Hemispherical Isotropy	E 2.2	0.45	10.92	10.92	R	$\sqrt{3}$	1.73	1	6.30
Boundary effects	E 2.3		4	4.00	R	$\sqrt{3}$	1.73	1	2.31
Linearity	E 2.4	0.04	0.93	0.93	R	$\sqrt{3}$	1.73	1	0.53
System Detection Limits	E 2.5		1	1.00	R	$\sqrt{3}$	1.73	1	0.58
Readout Electronics	E 2.6		1	1.00	N	1 or k	1.00	1	1.00
Response time	E 2.7		0	0.00	R	$\sqrt{3}$	1.73	1	0.00
Integration time	E 2.8		1.4	1.40	R	$\sqrt{3}$	1.73	1	0.81
RF Ambient Conditions	E 6.1		3	3.00	R	$\sqrt{3}$	1.73	1	1.73
Probe Positioner Mechanical Tolerance	E 6.2		0.6	0.60	R	$\sqrt{3}$	1.73	1	0.35
Probe Position wrt. Phantom Shell	E 6.3		3	3.00	R	$\sqrt{3}$	1.73	1	1.73
SAR Evaluation Algorithms	E 5		8	8.00	R	$\sqrt{3}$	1.73	1	4.62
Test Sample Related									
Test Sample Positioning	E 4.2		2	2.00	N	1	1.00	1	2.00
Device Holder Uncertainty	E 4.1		2	2.00	N	1	1.00	1	2.00
Output Power Variation	E 6.6.2		5	5.00	R	$\sqrt{3}$	1.73	1	2.89
Phantom and tissue Parameters									
Phantom Uncertainty (shape and thickness)	E 3.1		4	4.00	R	$\sqrt{3}$	1.73	1	2.31
Liquid conductivity (Deviation from target)	E 3.2		5	5.00	R	$\sqrt{3}$	1.73	0.64	1.85
Liquid conductivity (Meas. Uncertainty)	E 3.3		1.1	1.10	N	1	1.00	0.64	0.70
Liquid permittivity (Deviation from target)	E 3.2		5	5.00	R	$\sqrt{3}$	1.73	0.6	1.73
Liquid permittivity (Meas. Uncertainty)	E 3.3		1.1	1.10	N	1	1.00	0.6	0.66
Combined standard uncertainty					RSS				10.5

3.6 Measurement Traceability

All measurements described in this report are traceable to Chinese National Laboratory Accreditation (CNLA) standards or appropriate national standards.

4.0 WARNING LABEL INFORMATION - USA

See user manual.

5.0 REFERENCES

- [1] ANSI, *ANSI/IEEE C95.1-1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3kHz to 300 GHz*, The Institute of electrical and Electronics Engineers, Inc., New York, NY 10017, 1999

- [2] Federal Communications Commission, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields", OET Bulletin 65, FCC, Washington, D.C. 20554, 1997

- [3] IEEE Standards Coordinating Committee 34, "DRAFT Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Measurement Techniques", IEEE Std 1528-200X, Draft CD 1.2 – April 21, 2003

6.0 DOCUMENT HISTORY

Revision/ Job Number	Writer Initials	Date	Change
N/A	J.C.	Oct. 17, 2003	Original document
EME-031156	J.C.	Oct. 28, 2003	Added the dipole cal. Report Added the formula of liquid Put the zoom scan plot for worst case
EME-031156	J.C.	Nov. 18, 2003	Added the test result of WUB1600

APPENDIX A - SAR Evaluation Data

Power drift is the measurement of power drift of the device over one complete SAR scan.


To assess the drift of the power of the device under test, a SAR measurement was made in the middle of the zoom scan volume at the start of the scan and a measurement at this point was then also made after the measurement scan. The difference between the two measurements should be less than 5%.

Plot #1

Date:	2003/10/15	Position:	Bottom
Filename:	2450val10-15.txt	Phantom:	Box1.csv
Device Tested:	SARA2 system	Head Rotation:	0
Antenna:	2450dipole	Test Frequency:	2450MHz
Shape File:	none.csv	Power Level:	24dBm /CW

Probe:	0136			
Cal File:	SN0136_2450_CW_HEAD			
Cal Factors:		X	Y	Z
	Air	490	405	405
	DCP	20	20	20
	Lin	.453	.453	.453
Amp Gain:	2			
Averaging:	1			
Batteries Replaced:	-			


Liquid:	15.5cm
Type:	2450MHz Head
Conductivity:	1.80379
Relative Permittivity:	38.1223
Liquid Temp (deg C):	23.3
Ambient Temp (deg C):	24
Ambient RH (%):	50
Density (kg/m3):	1000
Software Version:	0.421N

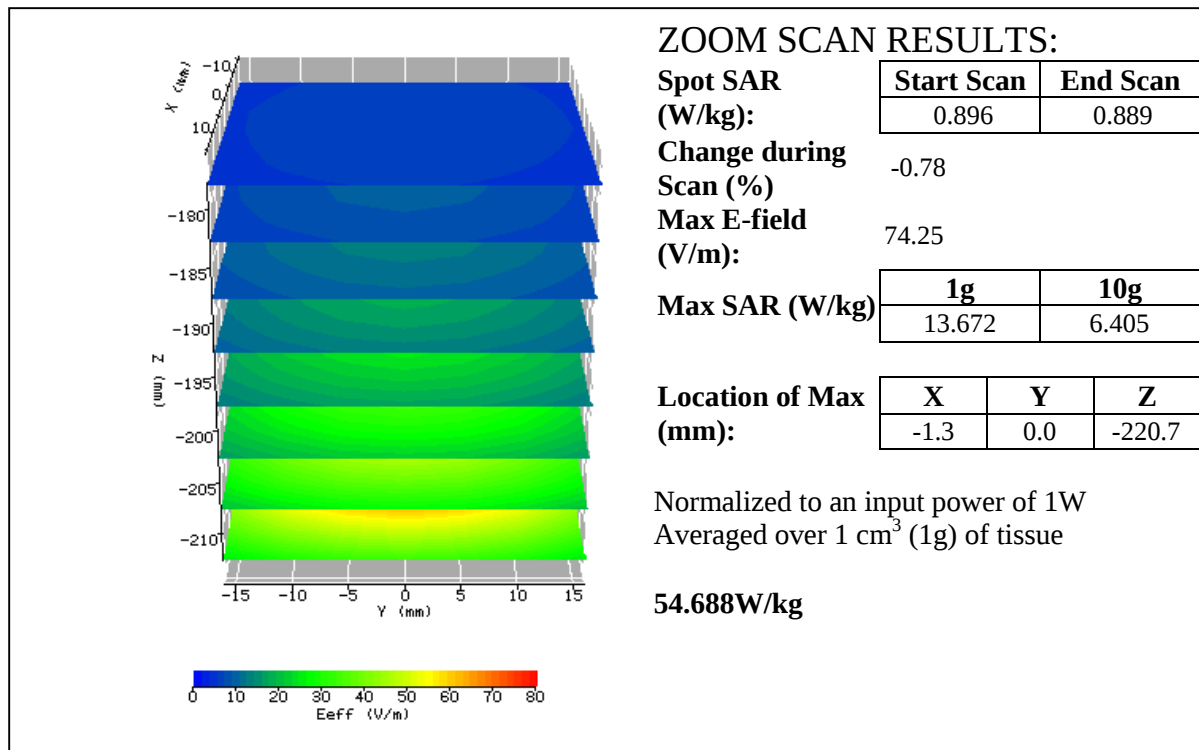

Date / Time:	2003/10/15	Position:	bottom of box phantom
Filename:	2450 performance check.txt	Phantom:	HeadBox1.csv
Device Tested:	2450 performance check	Head Rotation:	0
Antenna:	2450 dipole antenna	Test Frequency:	2450MHz
Shape File:	none.csv	Power Level:	24dBm

Probe:	0136			
Cal File:	SN0136_2450_CW_HEAD			
Cal Factors:		X	Y	Z
	Air	490	405	405
	DCP	20	20	20
	Lin	.453	.453	.453
Amp Gain:	2			
Averaging:	1			
Batteries	-			
Replaced:	-			

Liquid:	15.5cm
Type:	2450MHz Head
Conductivity:	1.80379
Relative Permittivity:	38.1223
Liquid Temp (deg C):	23.3
Ambient Temp (deg C):	24
Ambient RH (%):	50
Density (kg/m3):	1000
Software Version:	0.421N

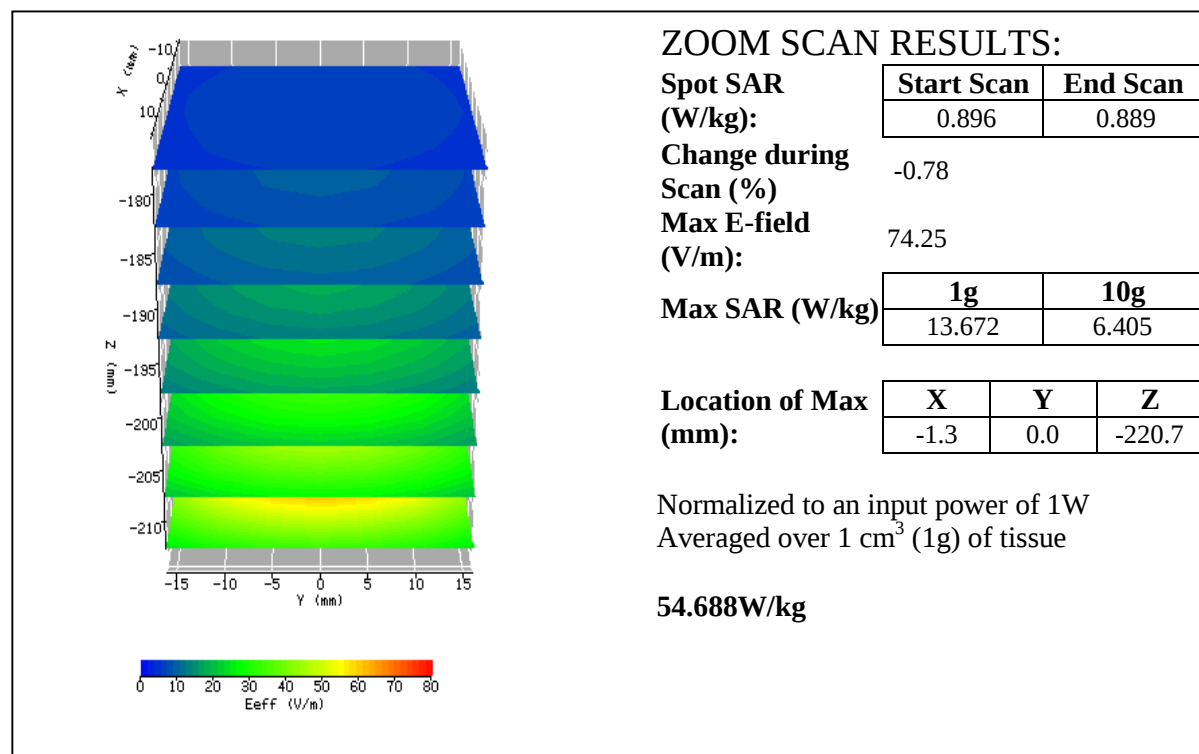



Plot #2

Date / Time: 2003/11/16
Filename: 2450 performance check.txt
Device Tested: 2450 performance check
Antenna: 2450MHz dipole
Shape File: none.csv

Position: bottom of box phantom
Phantom: HeadBox1-val..csv
Head Rotation: 0
Test Frequency: 2450MHz
Power Level: 24dBm


Probe: 0136
Cal File: SN0136_2450_CW_HEAD

Cal Factors:

	X	Y	Z
Air	490	405	405
DCP	20	20	20
Lin	.378	.378	.378

Amp Gain: 2
Averaging: 1
Batteries Replaced: -

Liquid: 15.5cm
Type: 2450MHz Head
Conductivity: 1.827782
Relative Permittivity: 37.648161
Liquid Temp (deg C): 21.1
Ambient Temp (deg C): 23
Ambient RH (%): 48
Density (kg/m3): 1000
Software Version: 0.421N

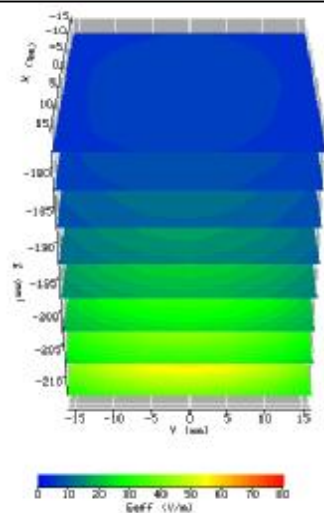**ZOOM SCAN RESULTS:****Spot SAR (W/kg):**

Start Scan	End Scan
0.834	0.848

Change during Scan (%) 1.68**Max E-field (V/m):** 74.97**Max SAR (W/kg)**

1g	10g
13.984	6.550

Location of Max (mm):

X	Y	Z
0.0	0.0	-220.9

Normalized to an input power of 1W
Averaged over 1 cm³ (1g) of tissue

55.936W/kg

#plot 3 (1/2)

Date / Time:	2003/10/16	Position:	bottom
Filename:	2437bot0.txt	Phantom:	HeadBox1.csv
Device Tested:	WBD512	Head Rotation:	0
Antenna:	PCB Printed	Test Frequency:	2437MHz
Shape File:	WBD512bot.csv	Power Level:	18.93 dBm

Probe:	0136			
Cal File:	SN0136_2450_CW_BODY			
Cal Factors:		X	Y	Z
	Air	490	405	405
	DCP	20	20	20
	Lin	.486	.486	.486
Amp Gain:	2			
Averaging:	1			
Batteries Replaced:	1			

Liquid:	15.5cm
Type:	2450MHz Body
Conductivity:	1.97944
Relative Permittivity:	50.691438
Liquid Temp (deg C):	21.9
Ambient Temp (deg C):	21
Ambient RH (%):	50
Density (kg/m3):	1000
Software Version:	0.421N
Crest Factor=1	


#plot 3 (2/2)

ZOOM SCAN RESULTS:

Spot SAR (W/kg):	Start Scan	End Scan
	0.039	0.039
Change during Scan (%)	0.00	
Max E-field (V/m):	10.24	
Location of Max (mm):	X	Y
	75.0	-27.0

AREA SCAN:

Scan Extent:		Min	Max	Steps
	Y	-60.0	30.0	9.0
	Z	-180.0	-100.0	8.0

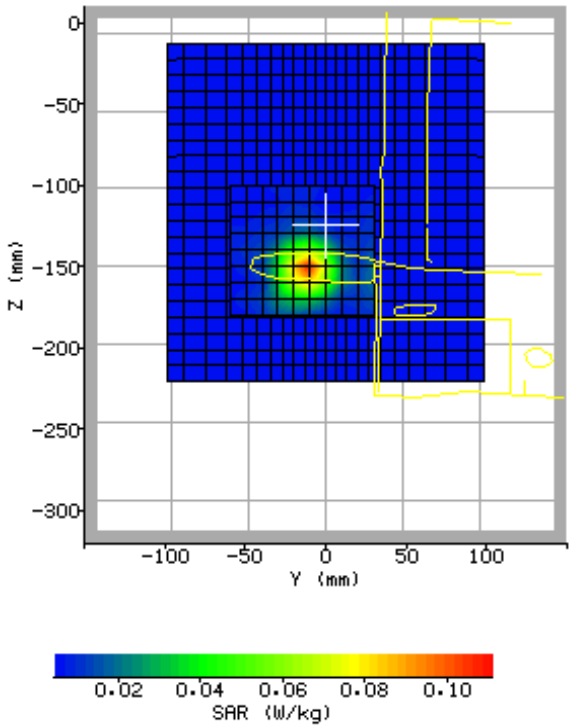


#plot 4 (1/2)

Date / Time:	2003/11/17	Position:	bottom
Filename:	2437bot0	Phantom:	HeadBox2-test.csv
Device Tested:	WBD512	Head Rotation:	0
Antenna:	PCB Printed	Test Frequency:	2437MHz
Shape File:	WBD512-bot.csv	Power Level:	18.93dBm

Probe:	0136			
Cal File:	SN0136_2450_CW_BODY			
Cal Factors:		X	Y	Z
	Air	490	405	405
	DCP	20	20	20
	Lin	.405	.405	.405
Amp Gain:	2			
Averaging:	1			
Batteries				
Replaced:	1			

Liquid:	15.5cm
Type:	2450MHz Body
Conductivity:	1.953
Relative Permittivity:	50.428
Liquid Temp (deg C):	20.8
Ambient Temp (deg C):	21
Ambient RH (%):	45
Density (kg/m3):	1000
Software Version:	0.421N
Crest Factor=1	

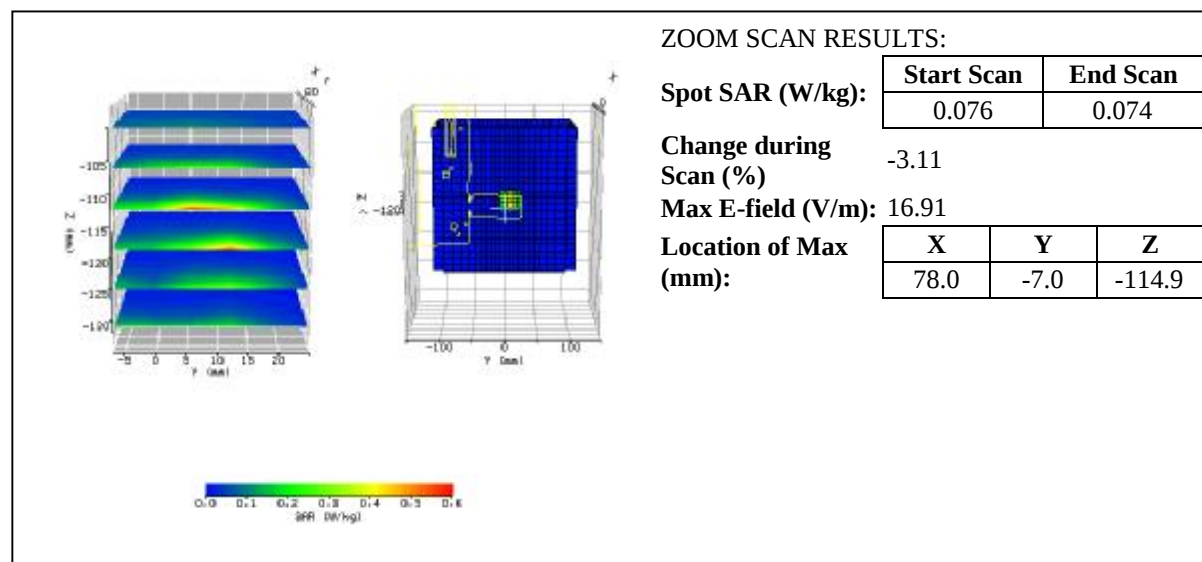


#plot 4 (2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-40.0	40.0	8.0
Z	-160.0	-90.0	7.0

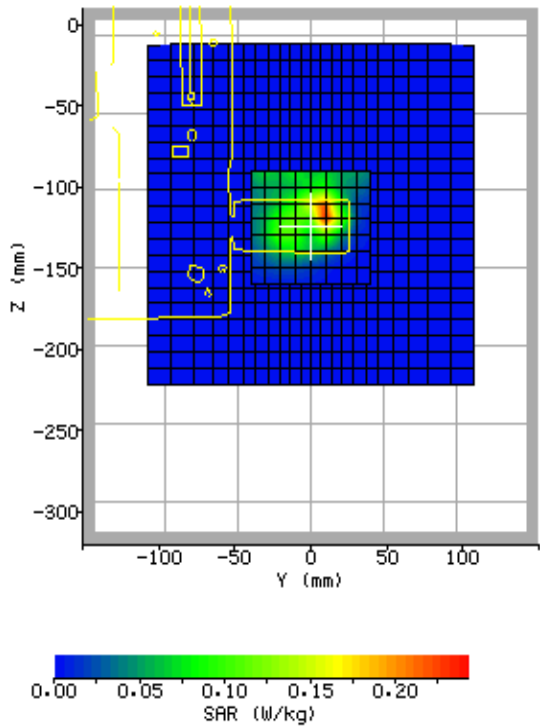

#plot 5 (1/2)

Date / Time:	2003/10/16	Position:	perpendicular 15mm
Filename:	2437per15.txt	Phantom:	HeadBox1.csv
Device Tested:	WBD512	Head Rotation:	0
Antenna:	PCB Printed	Test Frequency:	2437MHz
Shape File:	WBD512per.csv	Power Level:	18.93 dBm

Probe:	0136			
Cal File:	SN0136_2450_CW_BODY			
Cal Factors:		X	Y	Z
	Air	490	405	405
	DCP	20	20	20
	Lin	.486	.486	.486
Amp Gain:	2			
Averaging:	1			
Batteries				
Replaced:	1			

Liquid:	15.5cm
Type:	2450MHz Body
Conductivity:	1.97944
Relative Permittivity:	50.691438
Liquid Temp (deg C):	21.9
Ambient Temp (deg C):	21
Ambient RH (%):	50
Density (kg/m3):	1000
Software Version:	0.421N
Crest Factor=1	


#plot 5 (2/2)

ZOOM SCAN RESULTS:

Spot SAR (W/kg):	Start Scan		End Scan			
	0.009		0.010			
Change during Scan (%)	4.60					
Max E-field (V/m):	4.29					
Location of Max (mm):	X		Y		Z	
	75.0		-21.0		-127.1	

AREA SCAN:

Scan Extent:		Min	Max	Steps
	Y	-30.0	30.0	6.0
	Z	-180.0	-100.0	8.0

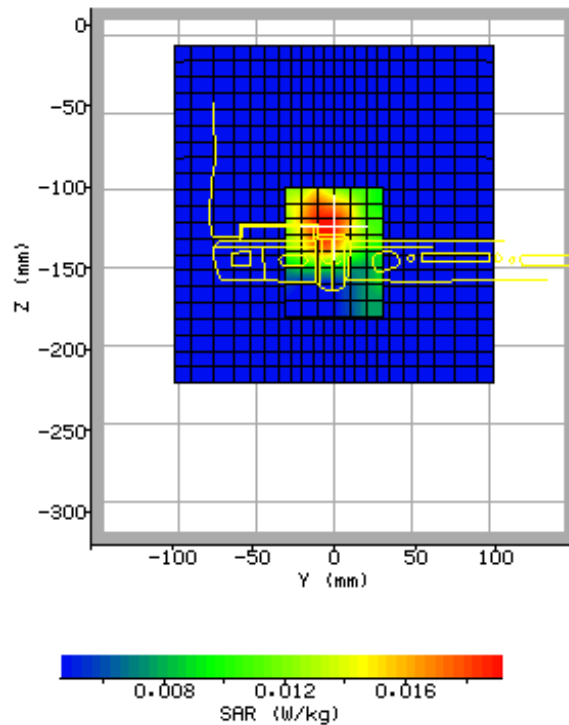

#plot 6 (1/2)

Date / Time:	2003/10/16	Position:	perpendicular 0mm
Filename:	2437per0.txt	Phantom:	HeadBox1.csv
Device Tested:	WBD512	Head Rotation:	0
Antenna:	PCB Printed	Test Frequency:	2437MHz
Shape File:	WBD512per.csv	Power Level:	18.93 dBm

Probe:	0136			
Cal File:	SN0136_2450_CW_BODY			
Cal Factors:		X	Y	Z
	Air	490	405	405
	DCP	20	20	20
	Lin	.486	.486	.486
Amp Gain:	2			
Averaging:	1			
Batteries Replaced:	1			

Liquid:	15.5cm
Type:	2450MHz Body
Conductivity:	1.97944
Relative Permittivity:	50.691438
Liquid Temp (deg C):	21.9
Ambient Temp (deg C):	21
Ambient RH (%):	50
Density (kg/m3):	1000
Software Version:	0.421N
Crest Factor=1	


#plot 6 (2/2)

ZOOM SCAN RESULTS:

Spot SAR (W/kg):	Start Scan		End Scan			
	0.050		0.049			
Change during Scan (%)	-3.23					
Max E-field (V/m):	11.82					
Location of Max (mm):	X		Y		Z	
	75.1		-18.0		-135.0	

AREA SCAN:


Scan Extent:		Min	Max	Steps
	Y	-30.0	30.0	6.0
	Z	-180.0	-100.0	8.0

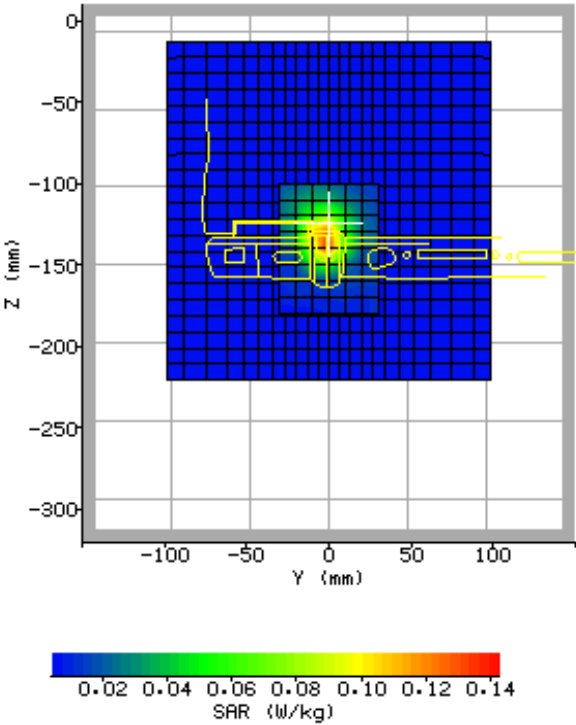

#plot 7 (1/2)

Date / Time:	2003/11/17	Position:	bottom
Filename:	2437bot0	Phantom:	HeadBox2-test.csv
Device Tested:	WUB1600	Head Rotation:	0
Antenna:	PCB Printed	Test Frequency:	2437MHz
Shape File:	WUB1600-bot.csv	Power Level:	18.77dBm

Probe:	0136	Liquid:	15.5cm
Cal File:	SN0136_2450_CW_BODY	Type:	2450MHz Body
Cal Factors:		Conductivity:	1.953
		Relative Permittivity:	50.428
		Liquid Temp (deg C):	20.8
		Ambient Temp (deg C):	21
Amp Gain:	2	Ambient RH (%):	45
Averaging:	1	Density (kg/m3):	1000
Batteries Replaced:	1	Software Version:	0.421N
		Crest Factor:	1

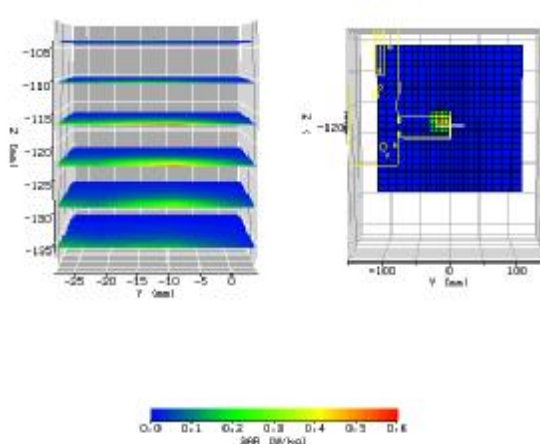
		ZOOM SCAN RESULTS:	
Spot SAR (W/kg):	Start Scan		End Scan
	0.078		0.079
Change during Scan (%)	1.54		
Max E-field (V/m):	16.48		
Max SAR (W/kg)	1g		10g
	0.344		0.159
Location of Max (mm):	X	Y	Z
	78.0	-28.0	-118.9

#plot 7 (2/2)

AREA SCAN:

Scan Extent:


	Min	Max	Steps
Y	-70.0	10.0	8.0
Z	-160.0	-90.0	7.0

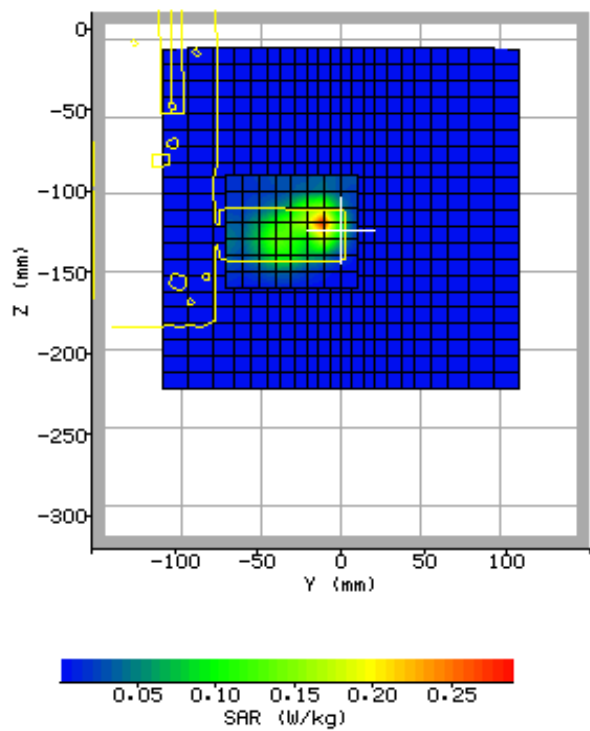

#plot 8 (1/2)

Date / Time:	2003/11/17	Position:	perpendicular 15mm
Filename:	2437per15	Phantom:	HeadBox2-test.csv
Device Tested:	WUB1600	Head Rotation:	0
Antenna:	PCB Printed	Test Frequency:	2437MHz
Shape File:	WUB1600-per.csv	Power Level:	18.77dBm

Probe:	0136	Liquid:	15.5cm
Cal File:	SN0136_2450_CW_BODY	Type:	2450MHz Body
Cal Factors:		Conductivity:	1.953
		Relative Permittivity:	50.428
		Liquid Temp (deg C):	20.8
		Ambient Temp (deg C):	21
Amp Gain:	2	Ambient RH (%):	45
Averaging:	1	Density (kg/m3):	1000
Batteries Replaced:	1	Software Version:	0.421N
		Crest Factor=	1

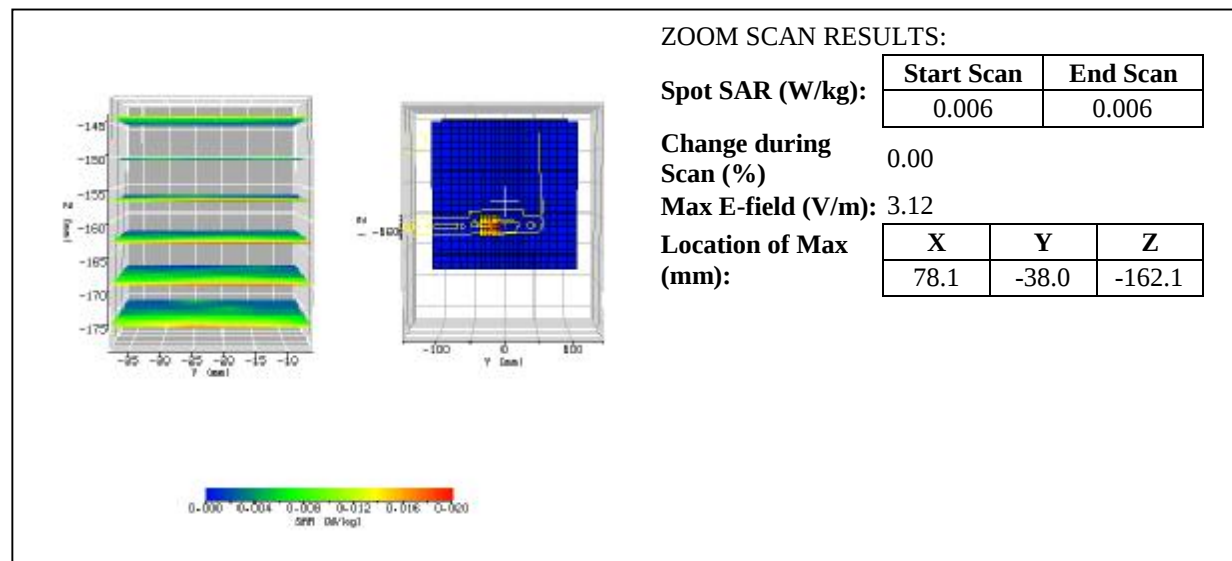


#plot 8 (2/2)

AREA SCAN:

Scan Extent:


	Min	Max	Steps
Y	-40.0	30.0	7.0
Z	-180.0	-120.0	6.0

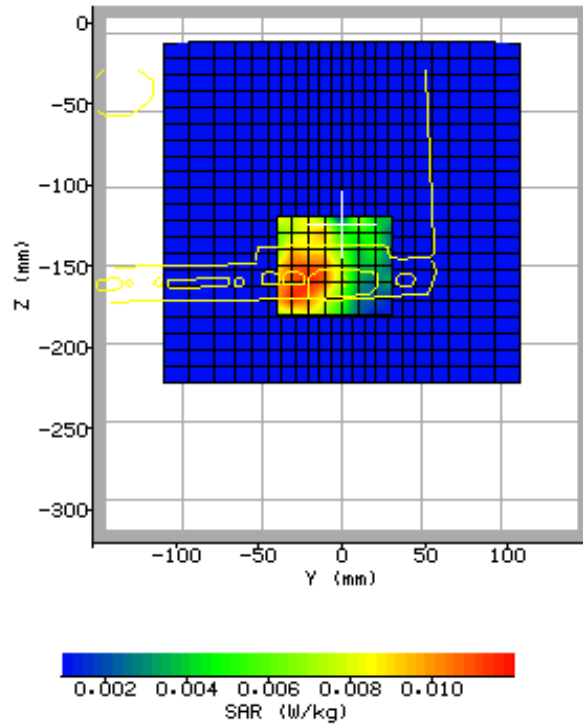

#plot 9 (1/2)

Date / Time:	2003/11/17	Position:	perpendicular 0mm
Filename:	2437per0	Phantom:	HeadBox2-test.csv
Device Tested:	WUB1600	Head Rotation:	0
Antenna:	PCB Printed	Test Frequency:	2437MHz
Shape File:	WUB1600-per.csv	Power Level:	18.77dBm

Probe:	0136	Liquid:	15.5cm
Cal File:	SN0136_2450_CW_BODY	Type:	2450MHz Body
Cal Factors:		Conductivity:	1.953
		Relative Permittivity:	50.428
		Liquid Temp (deg C):	20.8
		Ambient Temp (deg C):	21
Amp Gain:	2	Ambient RH (%):	45
Averaging:	1	Density (kg/m3):	1000
Batteries Replaced:	1	Software Version:	0.421N
		Crest Factor:	1

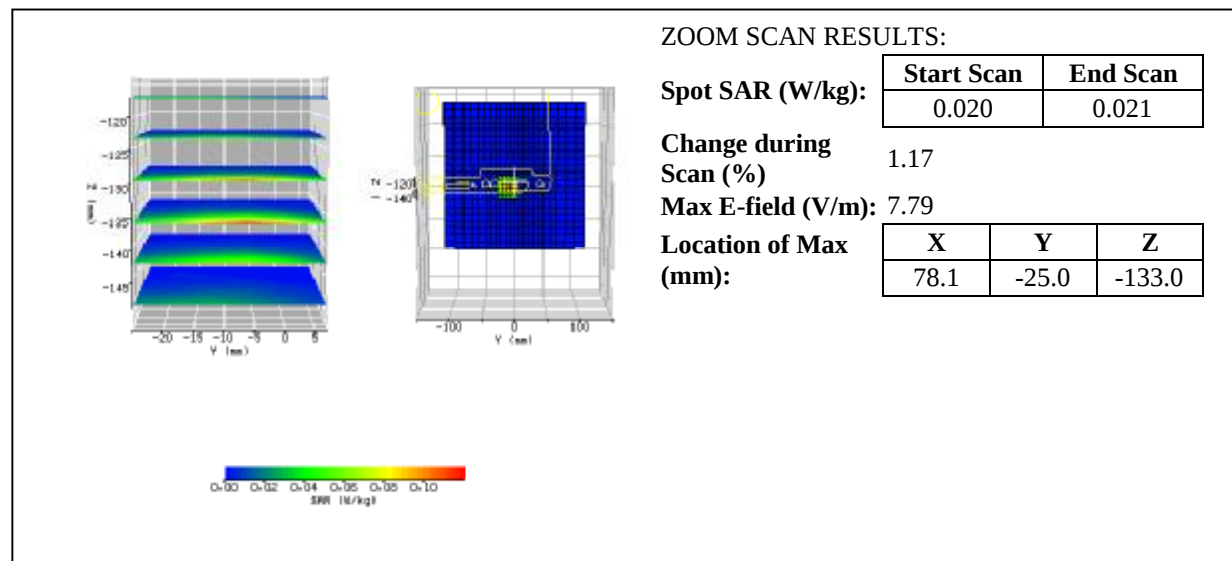


#plot 9 (2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-30.0	30.0	6.0
Z	-170.0	-110.0	6.0

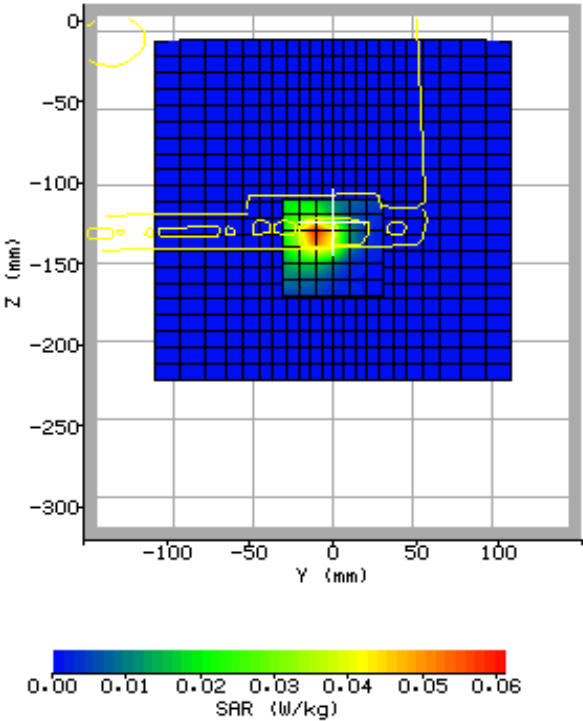




FCC ID. : MQ4WBD512

Report No.: EME-031156


Page 49 of 83

APPENDIX B – 2450MHz body liquid Calibration Data

Date: 15 Oct. 2003	Temperature:22.4℃	Type:2450MHz/body (FCC)	Tested by: Kevin
2410, 50.0943039867, -2.0397879056 2411, 50.0738793804, -2.0354621302 2412, 50.0549470735, -2.029494356 2413, 50.047567855, -2.0267501134 2414, 50.0461570517, -2.0199222901 2415, 50.0340754998, -2.0273257983 2416, 50.0571193099, -2.0160648618 2417, 50.0703932255, -2.0153049641 2418, 50.063692915, -2.0078563704 2419, 50.0762384409, -2.0063108215 2420, 50.0553833139, -2.0024162655 2421, 50.0570861626, -1.9989498341 2422, 50.0362390119, -2.0019776637 2423, 50.1250373997, -1.996974849 2424, 50.0874196415, -1.9958747876 2425, 50.1383743686, -1.9894221584 2426, 50.1737953527, -1.9832033431 2427, 50.1154790466, -1.9864897961 2428, 50.1672771754, -1.9805251488 2429, 50.1532634184, -1.9825777513 2430, 50.1961237835, -1.9778366073 2431, 50.2059634688, -1.9811128232 2432, 50.2326352501, -1.976357224 2433, 50.2457359334, -1.977016129 2434, 50.2526301436, -1.9701116744 2435, 50.2862010557, -1.9678164643 2436, 50.3197943945, -1.9623835486 2437, 50.3405233655, -1.9658837253 2438, 50.3488987554, -1.9737870193 2439, 50.3711085159, -1.9646324492 2440, 50.4246412181, -1.9693904267 2441, 50.4080260036, -1.9664568351 2442, 50.4752194418, -1.9641635698 2443, 50.4722512178, -1.9688237355 2444, 50.5504283011, -1.9666128108 2445, 50.5467186619, -1.9691361342 2446, 50.5206019573, -1.9677475037 2447, 50.5916658144, -1.9719324357 2448, 50.5839124687, -1.9733677635 2449, 50.630157372, -1.9725560789		2450, 50.6914384342, -1.9794437433 2451, 50.6800242908, -1.9738745564 2452, 50.6894169163, -1.9744473102 2453, 50.7415863085, -1.9749527149 2454, 50.7395641333, -1.9738164615 2455, 50.801718296, -1.9841210889 2456, 50.8196572476, -1.9947031142 2457, 50.821904787, -1.9884903053 2458, 50.893392466, -1.9931353974 2459, 50.9176577531, -1.9931923882 2460, 50.9086668334, -1.9911949867 2461, 50.9254307597, -1.9963053702 2462, 50.9203978235, -1.9989423537 2463, 50.9519383281, -2.0056129087 2464, 50.9811866596, -2.0106322582 2465, 50.9948909474, -2.0094445956 2466, 50.9841518249, -2.013620505 2467, 51.0511209709, -2.0165985142 2468, 51.0826851884, -2.0262043557 2469, 51.0736651285, -2.0220842157 2470, 51.1296839521, -2.0329025499 2471, 51.100335394, -2.033025821 2472, 51.1271841299, -2.0379089051 2473, 51.1547928094, -2.042833168 2474, 51.1992555544, -2.0506803727 2475, 51.1605332421, -2.0455768802 2476, 51.2166473447, -2.0482344264 2477, 51.2023404561, -2.0536654486 2478, 51.1915576463, -2.0634354534 2479, 51.2325590673, -2.0707009959 2480, 51.2088752505, -2.0748986128 2481, 51.2650423758, -2.0786853667 2482, 51.2230316258, -2.0753731823 2483, 51.2706083511, -2.0896624563 2484, 51.1888759123, -2.0882559374 2485, 51.2540714138, -2.0927247688 2486, 51.2575338819, -2.1010692675 2487, 51.2736651072, -2.106295633 2488, 51.2852114722, -2.1128009998 2489, 51.2600085733, -2.1185981923 2490, 51.2708043347, -2.1155623925	

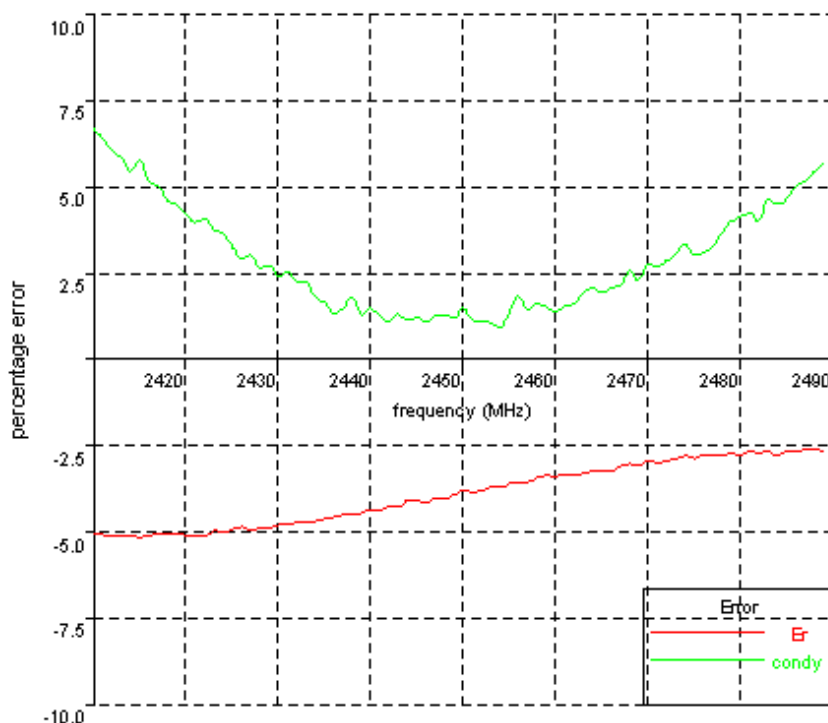

Date: 17 Nov. 2003	Temperature:22.2℃	Type:2450MHz/body (FCC)	Tested by: Clay
2410, 49.7854793559, -2.007375103 2411, 49.7867496125, -1.9952975293 2412, 49.7933431869, -1.9942158736 2413, 49.7719069004, -1.9868476008 2414, 49.7737210864, -1.9867935659 2415, 49.7744467476, -1.9819051419 2416, 49.7714830115, -1.9778853274 2417, 49.8000498298, -1.9735911621 2418, 49.8116235971, -1.9719099454 2419, 49.770788461, -1.9707603005 2420, 49.7951801297, -1.9738288311 2421, 49.8237605492, -1.9672541546 2422, 49.7896347949, -1.9646482257 2423, 49.8243354842, -1.959666318 2424, 49.8172285842, -1.9527304202 2425, 49.8697918054, -1.955711272 2426, 49.8519566826, -1.9520152518 2427, 49.872692077, -1.9539691992 2428, 49.8534385126, -1.9436640783 2429, 49.9102834907, -1.950024765 2430, 49.9194406169, -1.950540779 2431, 49.9590776007, -1.9479547192 2432, 50.0259753154, -1.9456655658 2433, 49.9874423384, -1.9432158577 2434, 50.0360938979, -1.9417265057 2435, 50.0661497341, -1.941257394 2436, 50.1152615066, -1.9409614782 2437, 50.0979468123, -1.9416143366 2438, 50.1134257065, -1.9391233391 2439, 50.1429613008, -1.9443394125 2440, 50.1989785505, -1.9353429111 2441, 50.207456714, -1.9411086832 2442, 50.1834028065, -1.9455280776 2443, 50.2363523859, -1.9409890234 2444, 50.2537487691, -1.940354531 2445, 50.3021461562, -1.9411272303 2446, 50.3338752248, -1.943426942 2447, 50.3708512846, -1.9468745571 2448, 50.3374503035, -1.9469310415 2449, 50.3923991577, -1.9481127026		2450, 50.4275199413, -1.9529741124 2451, 50.4781084346, -1.9531524669 2452, 50.4991042702, -1.946533529 2453, 50.4953612585, -1.9517151635 2454, 50.5042208344, -1.9588095038 2455, 50.5711111576, -1.9587426748 2456, 50.5407408342, -1.9636513194 2457, 50.587183416, -1.9652965968 2458, 50.6293621241, -1.9754533011 2459, 50.6611979933, -1.9719588774 2460, 50.6718011113, -1.9734446844 2461, 50.6809736774, -1.9762051204 2462, 50.7269904215, -1.9820543491 2463, 50.7221212139, -1.9806716338 2464, 50.7687304686, -1.9885829173 2465, 50.7705809889, -1.9875813556 2466, 50.7960180843, -1.9959175508 2467, 50.8391121102, -2.0043322138 2468, 50.8252524883, -1.9951651976 2469, 50.833280562, -2.0082312559 2470, 50.8675961175, -2.0169027825 2471, 50.8732202257, -2.018239769 2472, 50.8975956029, -2.0235403569 2473, 50.8649577414, -2.0206575151 2474, 50.8780772464, -2.0283825766 2475, 50.9037537682, -2.0353570498 2476, 50.9007851019, -2.0343801644 2477, 50.9062272831, -2.0473912117 2478, 50.9937367555, -2.0485412976 2479, 50.9336815176, -2.0518105102 2480, 51.0067795194, -2.0638976297 2481, 50.9826771592, -2.0592746364 2482, 50.9759253361, -2.0671144985 2483, 50.9797031437, -2.0717010332 2484, 50.947012631, -2.0705757081 2485, 51.0007679114, -2.0883124333 2486, 50.9587350352, -2.0880529644 2487, 50.9887265968, -2.0953048955 2488, 50.9185925745, -2.1040510105 2489, 50.9428038939, -2.1088711888 2490, 50.9834206987, -2.1112119111	

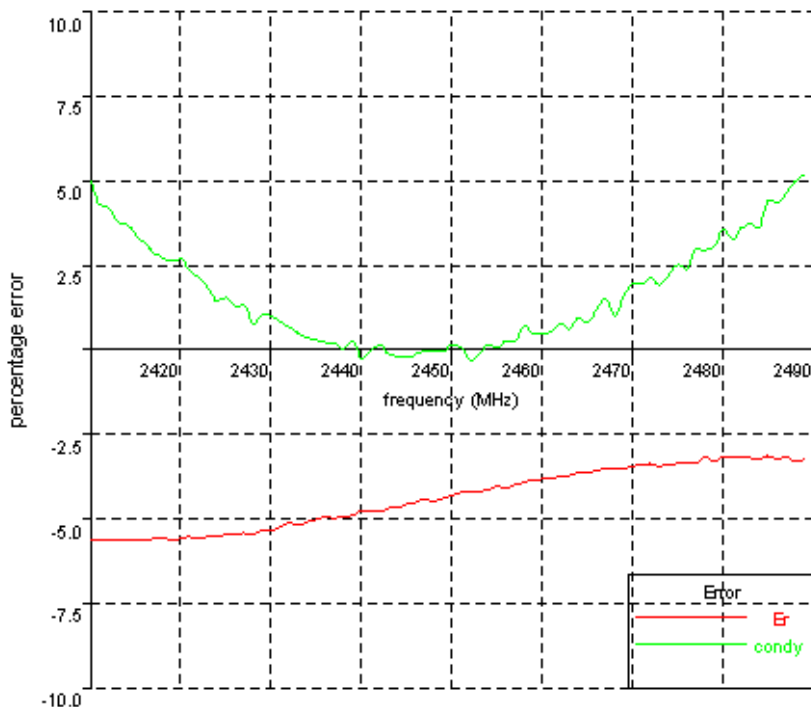

Photographs











FCC ID. : MQ4WBD512

Report No.: EME-031156

Page 56 of 83

APPENDIX C - E-Field Probe and 2450MHz Balanced dipole antenna Certificate and Calibration Data

Validation dipole certificate and performance measurements



Indexsar Limited
Oakfield House
Cudworth Lane
Newdigate
Surrey RH5 5DR
Tel: +44 (0) 1306 631 233
Fax: +44 (0) 1306 631 834
e-mail: enquiries@indexsar.com
Calibration Certificate
Dosimetric E-field Probe

Type: **IXP-050**

Manufacturer: **IndexSAR, UK**

Serial Number: **0136**

Place of Calibration: **IndexSAR, UK**

IndexSAR Limited hereby declares that the IXP-050 Probe named above has been calibrated for conformity to the IEEE 1528 and CENELEC En 50361 standards on the date shown below.

Date of Initial Calibration: **10th September 2003**

The probe named above will require a calibration check on the date shown below.

Next Calibration Date: **September 2004**

The calibration was carried out using the methods described in the calibration document.
Where applicable, the standards used in the calibration process are traceable to the UK's National Physical Laboratory.

Calibrated By:

A handwritten signature in blue ink, appearing to read "K. M. Lacey".

Approved By:

A handwritten signature in black ink, appearing to read "M. J. Mann".

Please keep this certificate with the calibration document. When the probe is sent for a calibration check, please include the calibration document.



IMMERSIBLE SAR PROBE

CALIBRATION REPORT

Part Number: IXP – 050

S/N 0136

10th September 2003



Indexsar Limited
Oakfield House
Cudworth Lane
Newdigate
Surrey RH5 5DR
Tel: +44 (0) 1306 631 233
Fax: +44 (0) 1306 631 834
e-mail: enquiries@indexsar.com

INTRODUCTION

This Report presents measured calibration data for a particular Indexsar SAR probe (S/N 0136) and describes the procedures used for characterisation and calibration.

Indexsar probes are characterised using procedures that, where applicable, follow the recommendations of CENELEC [1] and IEEE [2] standards. The procedures incorporate techniques for probe linearisation, isotropy assessment and determination of liquid factors (conversion factors). Calibrations are determined by comparing probe readings with analytical computations in canonical test geometries (waveguides) using normalised power inputs.

Each step of the calibration procedure and the equipment used is described in the sections below.

CALIBRATION PROCEDURE

1. Equipment Used

For the first part of the characterisation procedure, the probe is placed in an isotropy measurement jig as pictured in Figure 1. In this position the probe can be rotated about its axis by a non-metallic belt driven by a stepper motor.

The probe is attached via its amplifier and an optical cable to a PC. A schematic representation of the test geometry is illustrated in Figure 2.

A balanced dipole (900 MHz) is inserted horizontally into the bracket attached to a second belt (Figure 1). The dipole can also be rotated about its axis. A cable connects the dipole to a signal generator, via a directional coupler and power meter. The signal generator feeds an RF amplifier at constant power, the output of which is monitored using the power meter. The probe is positioned so that its sensors line up with the rotation center of the source dipole. By recording output voltage measurements of each channel as both the probe and the dipole are rotated, data are obtained from which the spherical isotropy of the probe can be optimised and its magnitude determined.

The calibration process requires E-field measurements to be taken in air, in 900 MHz simulated brain liquid and at other frequencies/liquids as appropriate.

2. Linearising probe output

The probe channel output signals are linearised in the manner set out in Refs [1] and [2]. The following equation is utilized for each channel:

$$U_{lin} = U_{o/p} + U_{o/p}^2 / DCP \quad (1)$$

where U_{lin} is the linearised signal, $U_{o/p}$ is the raw output signal in voltage units and DCP is the diode compression potential in similar voltage units.

DCP is determined from fitting equation (1) to measurements of U_{lin} versus source feed power over the full dynamic range of the probe. The DCP is a characteristic of the schottky diodes used as the sensors. For the IXP-050 probes with CW signals the DCP values are typically 0.10V (or 20 in the voltage units used by Indexsar software, which are $V \times 200$).

3. Selecting channel sensitivity factors to optimise isotropic response

The basic measurements obtained using the calibration jig (Fig 1) represent the output from each diode sensor as a function of the presentation angle of the source (probe and dipole rotation angles). The directionality of the orthogonally-arranged sensors can be checked by analysing the data using dedicated Indexsar software, which displays the data in 3D format as in Figure 3. The left-hand side of this diagram shows the individual channel outputs after linearisation (see above). The program uses these data to balance the channel outputs and then applies an optimisation process, which makes fine adjustments to the channel factors for optimum isotropic response.

The next stage of the process is to calibrate the Indexsar probe to a W&G EMR300 E-field meter in air. The principal reasons for this are to obtain conversion factors applicable should the probe be used in air and to provide an overall measure of the probe sensitivity.

A multiplier is applied to factors to bring the magnitudes of the average E-field measurements as close as possible to those of the W&G probe.

The following equation is used (where linearised output voltages are in units of V*200):

$$E_{air}^2 (V/m) = U_{linx} * Air Factor_x + U_{liny} * Air Factor_y + U_{linz} * Air Factor_z \quad (2)$$

It should be noted that the air factors are not separately used for normal SAR testing. The IXP-050 probes are optimised for use in tissue-simulating liquids and do not behave isotropically in air.

4. 900 MHz Liquid Calibration

Conversion factors for use when the probes are immersed in tissue-simulant liquids at 900 MHz are determined either using a waveguide or by comparison to a reference probe that has been calibrated by NPL. Waveguide procedures are described later. The summary sheet indicates the method used for the probe S/N 0136.

The conversion factor, referred to as the 'liquid factor' is also applied to the measurements of each channel. The following equation is used (where output voltages are in units of V*200):

$$E_{liq}^2 (V/m) = U_{linx} * Air Factor_x * Liq Factor_x + U_{liny} * Air Factor_y * Liq Factor_y + U_{linz} * Air Factor_z * Liq Factor_z \quad (3)$$

A 3D representation of the spherical isotropy for probe S/N 0136 using these factors is shown in Figure 3.

The rotational isotropy can also be determined from the calibration jig measurements and is reported as the 900MHz isotropy in the summary table. Note that waveguide measurements can also be used to determine rotational isotropy (Fig. 5).

The design of the cells used for determining probe conversion factors are waveguide cells is shown in Figure 4. The cells consist of a coax to waveguide transition and an open-ended section of waveguide containing a dielectric separator. Each waveguide cell stands in the upright position and is filled with liquid within 10 mm of the open end. The separator provides a liquid seal and is designed for a good

electrical transition from air filled guide to liquid filled guide. The choice of cell depends on the portion of the frequency band to be examined and the choice of liquid used. The depth of liquid ensures there is negligible radiation from the waveguide open top and that the probe calibration is not influenced by reflections from nearby objects. The return loss at the coaxial connector of the filled waveguide cell is measured initially using a network analyser and this information is used subsequently in the calibration procedure. The probe is positioned in the centre of the waveguide and is adjusted vertically or rotated using stepper motor arrangements. The signal generator is connected to the waveguide cell and the power is monitored with a coupler and a power meter. A fuller description of the waveguide method is given below.

The liquid dielectric parameters used for the probe calibrations are listed in the Tables below. The final calibration factors for the probe are listed in the summary chart.

WAVEGUIDE MEASUREMENT PROCEDURE

The calibration method is based on setting up a calculable specific absorption rate (SAR) in a vertically-mounted WG8 (R22) waveguide section [1]. The waveguide has an air-filled, launcher section and a liquid-filled section separated by a matching window that is designed to minimise reflections at the liquid interface. A TE_{01} mode is launched into the waveguide by means of a N-type-to-waveguide adapter. The power delivered to the liquid section is calculated from the forward power and reflection coefficient measured at the input to the waveguide. At the centre of the cross-section of the waveguide, the local spot SAR in the liquid as a function of distance from the window is given by functions set out in IEEE1528 as below:

Because of the low cutoff frequency, the field inside the liquid nearly propagates as a TEM wave. The depth of the medium (greater than three penetration depths) ensures that reflections at the upper surface of the liquid are negligible. The power absorbed in the liquid is determined by measuring the waveguide forward and reflected power. Equation (4) shows the relationship between the SAR at the cross-sectional center of the lossy waveguide and the longitudinal distance (z) from the dielectric separator

$$SAR(z) = \frac{4(P_f - P_b)}{r ab d} e^{-2z/d} \quad (4)$$

where the density r is conventionally assumed to be 1000 kg/m^3 , ab is the cross-sectional area of the waveguide, P_f and P_b are the forward and reflected power inside the lossless section of the waveguide, respectively. The penetration depth d , which is the reciprocal of the waveguide-mode attenuation coefficient, is determined from a scan along the z -axis and compared with the theoretical value determined from Equation (5) using the measured dielectric properties of the lossy liquid.

$$d = \left[\text{Re} \left\{ \sqrt{(p/a)^2 + j\omega m_o (s + j\omega e_o e_r)} \right\} \right]^{-1}. \quad (5)$$

Table A.1 of [1] can be used for designing calibration waveguides with a return loss greater than 30 dB at the most important frequencies used for personal wireless communications. Values for the penetration depth for these specific fixtures and tissue-simulating mixtures are also listed in Table A.1.

According to [1], this calibration technique provides excellent accuracy, with standard uncertainty of less than 3.6% depending on the frequency and medium. The calibration itself is reduced to power measurements traceable to a standard calibration procedure. The practical limitation to the frequency band of 800 to 2500 MHz because of the waveguide size is not severe in the context of compliance testing.

CALIBRATION FACTORS MEASURED FOR PROBE S/N 0136

The probe was calibrated at 900, 1800, 1900 and 2450MHz MHz in liquid samples representing both brain liquid and body fluid at these frequencies. The calibration was for CW signals only, and the axis of the probe was parallel to the direction of propagation of the incident field i.e. end-on to the incident radiation. The axial isotropy of the probe was measured by rotating the probe about its axis in 10 degree steps through 360 degrees in this orientation.

The reference point for the calibration is in the centre of the probe's cross-section at a distance of 2.7 m from the probe tip in the direction of the probe amplifier. A value of 2.7 mm should be used for the tip to sensor offset distance in the software.

It is important that the diode compression point and air factors used in the software are the same as those quoted in the results tables, as these are used to convert the diode output voltages to a SAR value.

DIELECTRIC PROPERTIES OF LIQUIDS

The dielectric properties of the brain and body tissue-simulant liquids employed for calibration are listed in the tables below. The measurements were performed prior to each waveguide test using an Indexsar DiLine measurement kit, which uses the TEM method as recommended in [2].

AMBIENT CONDITIONS

Measurements were made in the open laboratory at $22 \pm 2.0^{\circ}\text{C}$. The temperature of the liquids in the waveguide used was measured using a mercury thermometer.

RESPONSE TO MODULATED SIGNALS

To measure the response of the probe and amplifier to modulated signals, the probe is held vertically in a liquid-filled waveguide.

An RF amplifier is allowed to warm up and stabilise before use. A spectrum analyser is used to demonstrate that the peak power of the RF amplifier for the CW signals and the pulsed signals are within 0.1dB of each other when the signal generator is switched from CW to modulated output. Subsequently, the power levels recorded are read from a power meter when a CW signal is being transmitted.

The test sequence involves manually stepping the power up in regular (e.g. 2 dB) steps from the lowest power that gives a measurable reading on the SAR probe up to the maximum that the amplifiers can deliver.

At each power level, the individual channel outputs from the SAR probe are recorded at CW and then recorded again with the modulation setting. The results are entered into a spreadsheet. Using the spreadsheets, the modulated power is calculated by applying a factor to the measured CW power (e.g. for GSM, this factor is 9.03dB). This process is repeated 3 times with the response maximised for each channel sensor in turn.

The probe channel output signals are linearised in the manner set out in Section 1 above using equation (1) with the DCPs determined from the linearisation procedure. Calibration factors for the probe are used to determine the E-field values corresponding to the probe readings using equation (3). SAR is determined from the equation

$$\text{SAR (W/kg)} = E_{\text{liq}}^2 \text{ (V/m)} * \sigma \text{ (S/m)} / 1000 \quad (6)$$

Where σ is the conductivity of the simulant liquid employed.


Using the spreadsheet data, the DCP value for linearising each of the individual channels (X, Y and Z) is assessed separately. The corresponding DCP values are listed in the summary page of the calibration factors for each probe.

Figure 7 shows the linearised probe response to GSM signals, Figure 8 the response to GPRS signals (GSM with 2 timeslots) and Figure 9 the response to CDMA IS-95A and W-CDMA signals.

Additional tests have shown that the modulation response is similar at 1800MHz and is not affected by the orientation between the source and the probe.

SUMMARY OF CALIBRATION FACTORS FOR PROBE IXP-050 S/N 0136

Spherical isotropy measured at 900 MHz 0.24 (+/-) dB

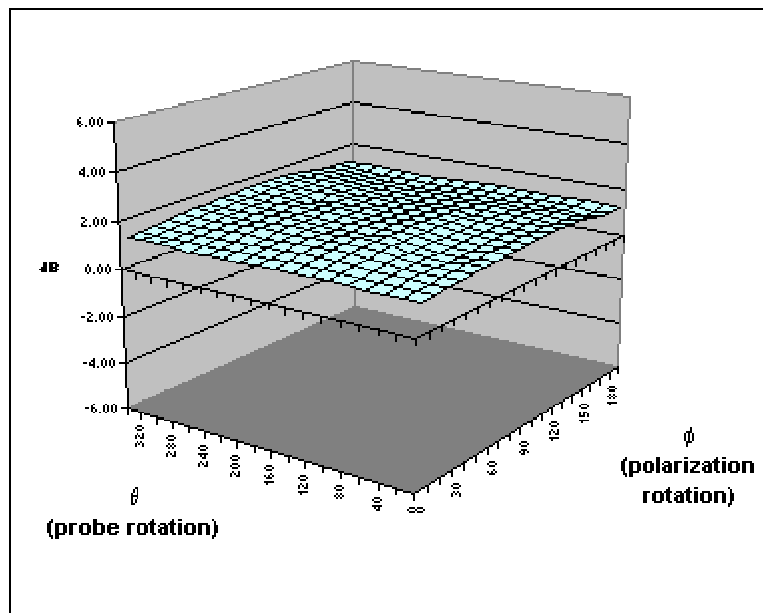

	X	Y	Z	
Air factors	490	405	405	(V*200)
DCPs	20	20	20	(V*200)
DSSS	20	20	20	(V*200)
GSM	8	9.5	11.2	(V*200)
CDMA	20	20	20	(V*200)

f (MHz)	Axial isotropy (+/- dB)		SAR conversion factors (liq/air)		Notes
	BRAIN	BODY	BRAIN	BODY	
450					
835	0.05	0.04	0.257	0.272	1,2,3
900	0.05	0.04	0.261	0.282	1,2,3
1800	0.06	0.06	0.315	0.339	1,2,3
1900	0.06	0.06	0.327	0.351	1,2,3
2450	0.05	0.10	0.453	0.486	1,2,3

Notes

- 1) Calibrations done at 22C +/- 2C
- 2) Waveguide calibration
- 3) Checked using box-phantom validation test

(the graph shows a simple, spreadsheet representation of surface shown in 3D in Figure 3 below)

PROBE SPECIFICATIONS

Indexsar probe 0136, along with its calibration, is compared with CENELEC and IEEE standards recommendations (Refs [1] and [2]) in the Tables below. A listing of relevant specifications is contained in the tables below:

Dimensions	S/N 0136	CENELEC [1]	IEEE [2]
Overall length (mm)	350		
Tip length (mm)	10		
Body diameter (mm)	12		
Tip diameter (mm)	5.2	8	8
Distance from probe tip to dipole centers (mm)	2.7		

Dynamic range	S/N 0136	CENELEC [1]	IEEE [2]
Minimum (W/kg)	0.01	<0.02	0.01
Maximum (W/kg) N.B. only measured to 35 W/kg	>35	>100	100

Linearity of response	S/N 0136	CENELEC [1]	IEEE [2]
Over range 0.01 – 100 W/kg (+/- dB)	0.125	0.50	0.25

Isotropy (measured at 900MHz)	S/N 0136	CENELEC [1]	IEEE [2]
Axial rotation with probe normal to source (+/- dB) at 835, 900, 1800, 1900 and 2450 MHz	Max. 0.10 (see summary table)	0.5	0.25
Spherical isotropy covering all orientations to source (+/- dB)	0.24	1.0	0.50

Construction	Each probe contains three orthogonal dipole sensors arranged on a triangular prism core, protected against static charges by built-in shielding, and covered at the tip by PEEK cylindrical enclosure material. No adhesives are used in the immersed section. Outer case materials are PEEK and heat-shrink sleeving.
Chemical resistance	Tested to be resistant to glycol and alcohol containing simulant liquids but probes should be removed, cleaned and dried when not in use.

REFERENCES

- [1] CENELEC, EN 50361, July 2001. Basic Standard for the measurement of specific absorption rate related to human exposure to electromagnetic fields from mobile phones.
- [2] IEEE 1528, Recommended practice for determining the spatial-peak specific absorption rate (SAR) in the human body due to wireless communications devices: Experimental techniques.
- [3] Calibration report on SAR probe IXP-050 S/N 0071 from National Physical Laboratory. Test Report EF07/2002/03/IndexSAR. Dated 20 February 2002.

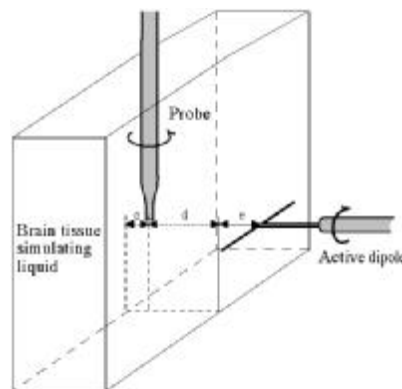
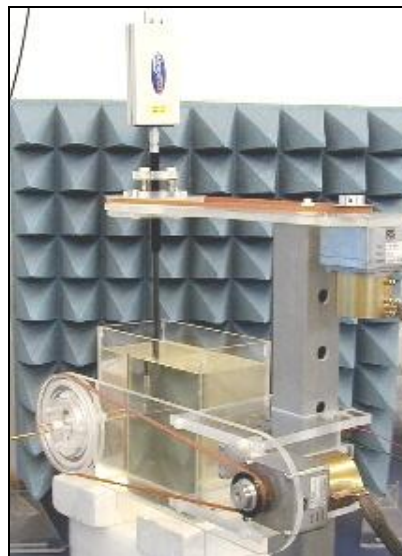


Figure 1. Spherical isotropy jig showing probe, dipole and box filled with simulated brain liquid (see Ref [2], Section A.5.2.1)

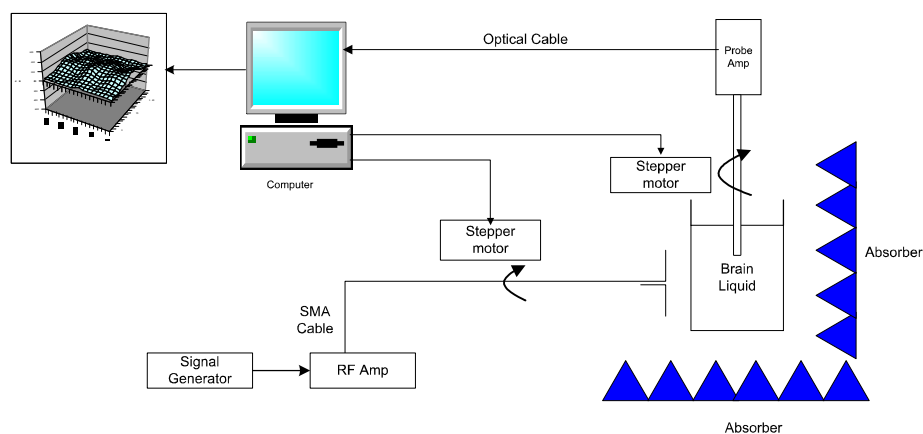


Figure 2. Schematic diagram of the test geometry used for isotropy determination

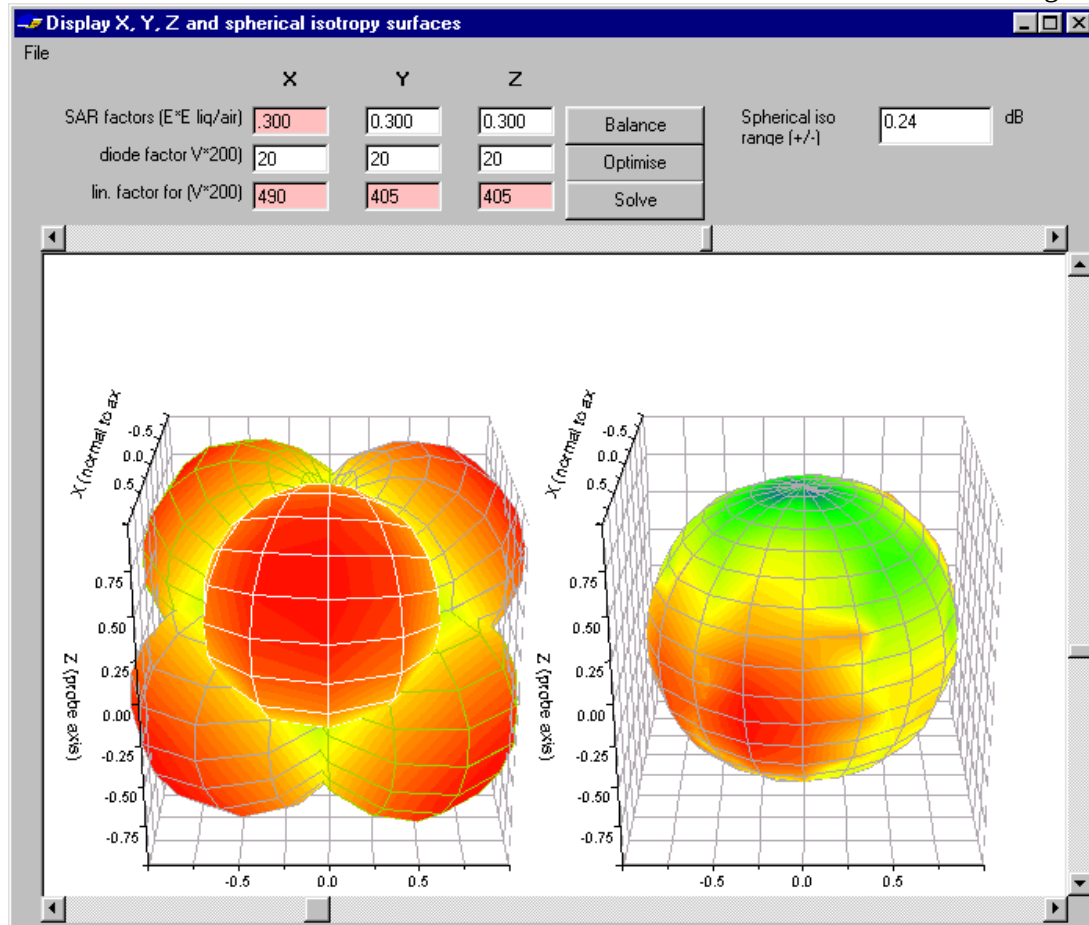


Figure 3. Graphical representation of the probe response to fields applied from each direction. The diagram on the left shows the individual response characteristics of each of the three channels and the diagram on the right shows the resulting probe sensitivity in each direction. The colour range in the figure images the lowest values as blue and the maximum values as red. For the probe S/N 0136, this range is (+/-) 0.24 dB. The probe is more sensitive to fields parallel to the axis and less sensitive to fields normal to the probe axis.

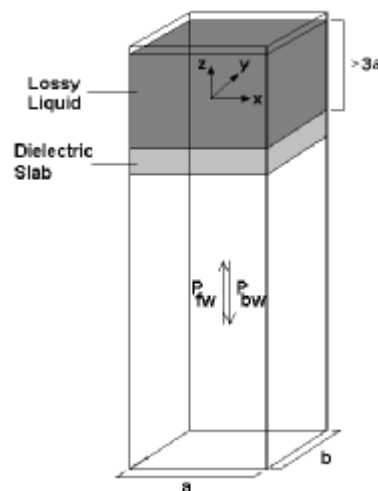


Figure 4. Geometry used for waveguide calibration (after Ref [2]. Section A.3.2.2)

IXP-050 S/N 0136

18-Aug-03

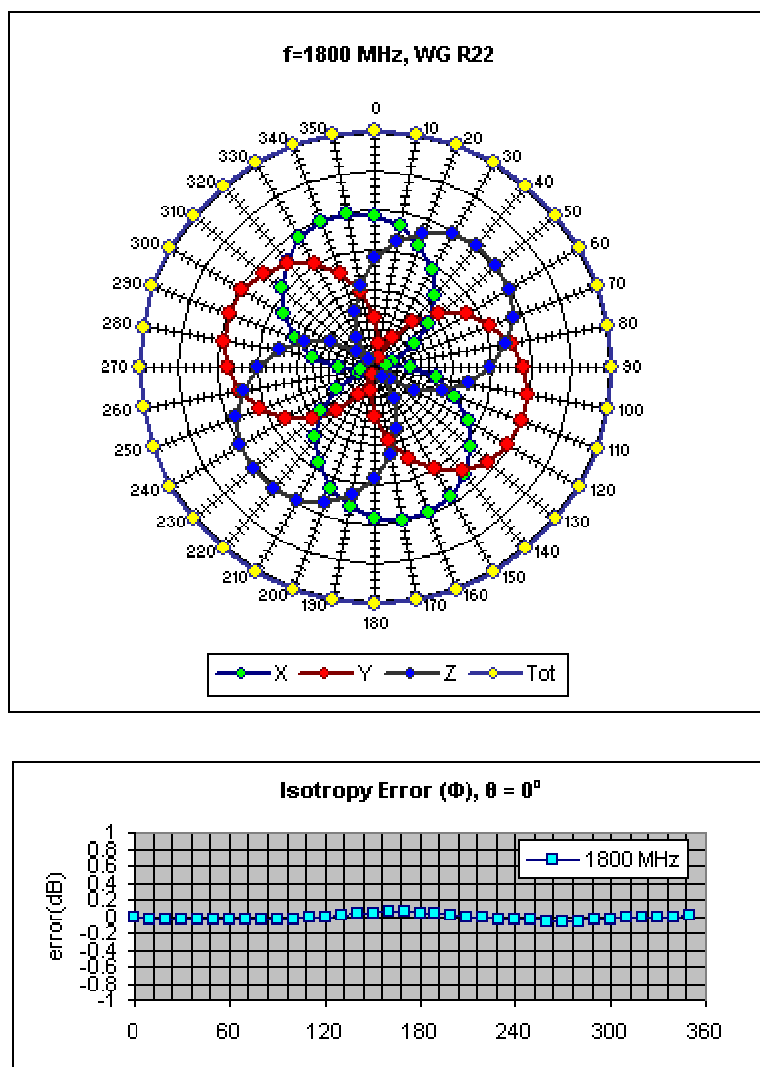


Figure 5. Example of the rotational isotropy of probe S/N 0136 obtained by rotating the probe in a liquid-filled waveguide at 2450 MHz. Similar distributions are obtained at the other test frequencies (1800 and 1900 MHz) both in brain liquids and body fluids (see summary table)

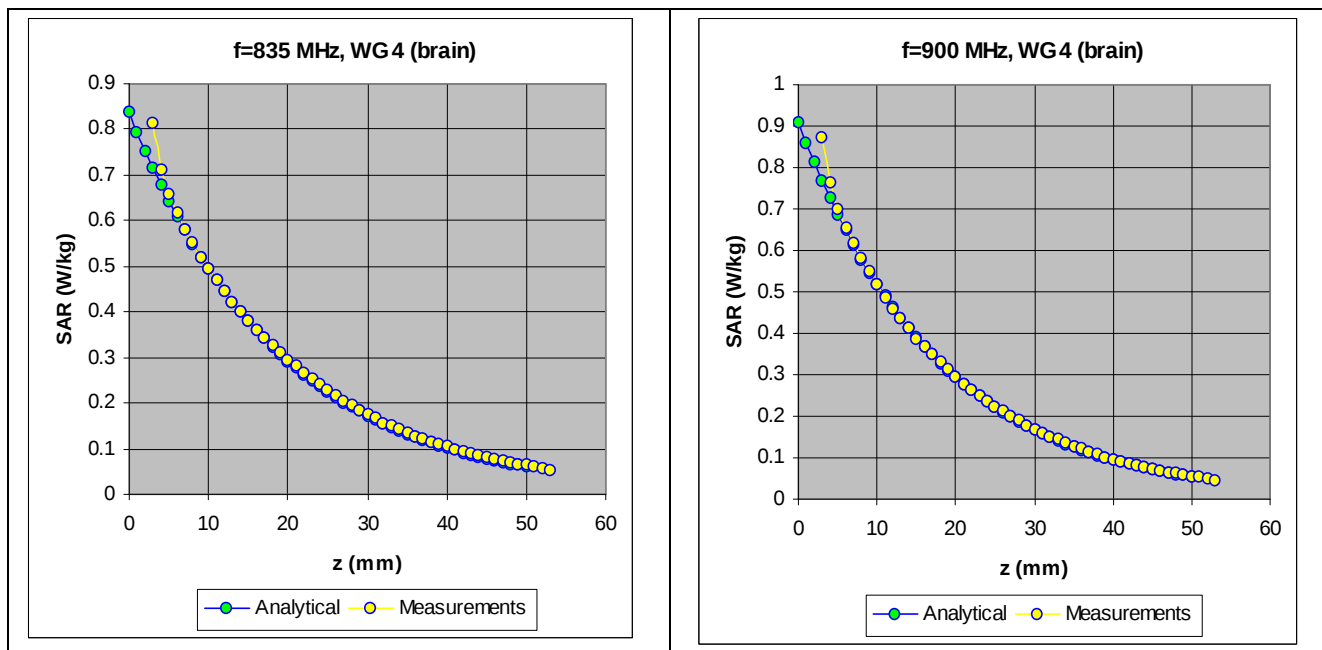


Figure 6. The measured SAR decay function along the centreline of the WG4 waveguide with conversion factors adjusted to fit to the theoretical function for the particular dimension, frequency, power and liquid properties employed.

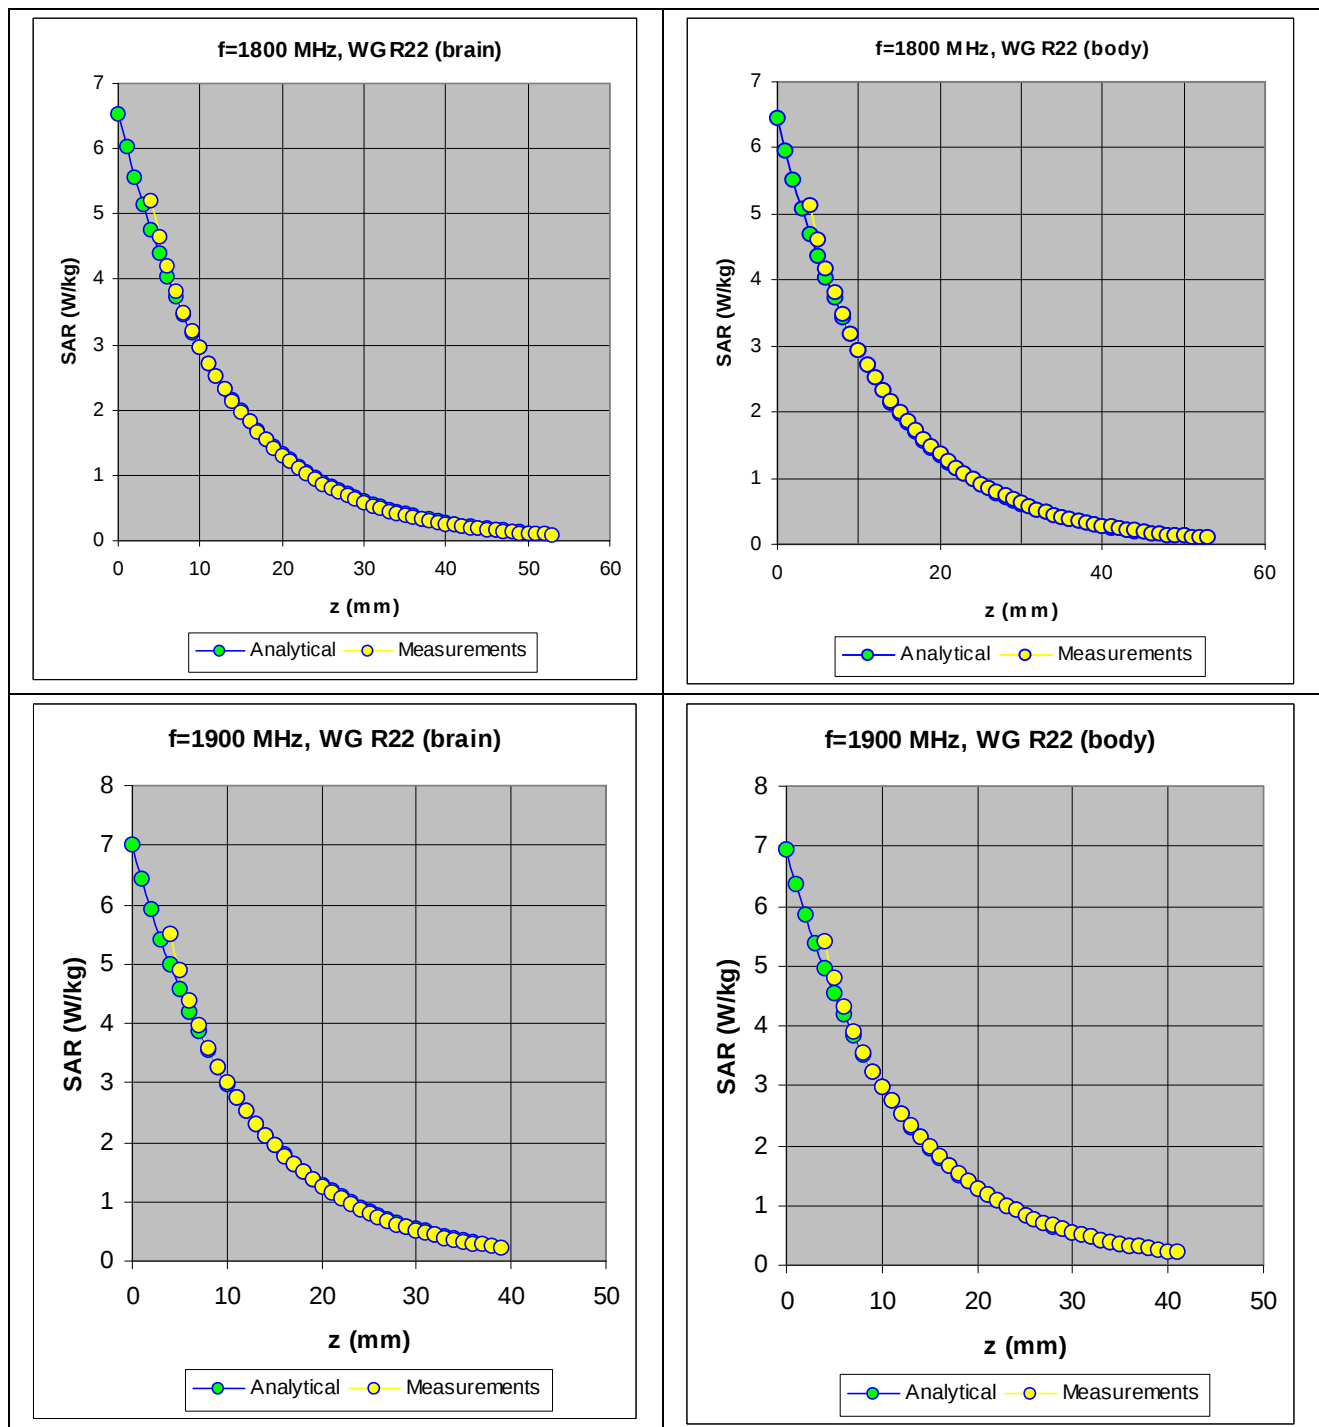


Figure 7. The measured SAR decay function along the centreline of the R22 waveguide with conversion factors adjusted to fit to the theoretical function for the particular dimension, frequency, power and liquid properties employed.

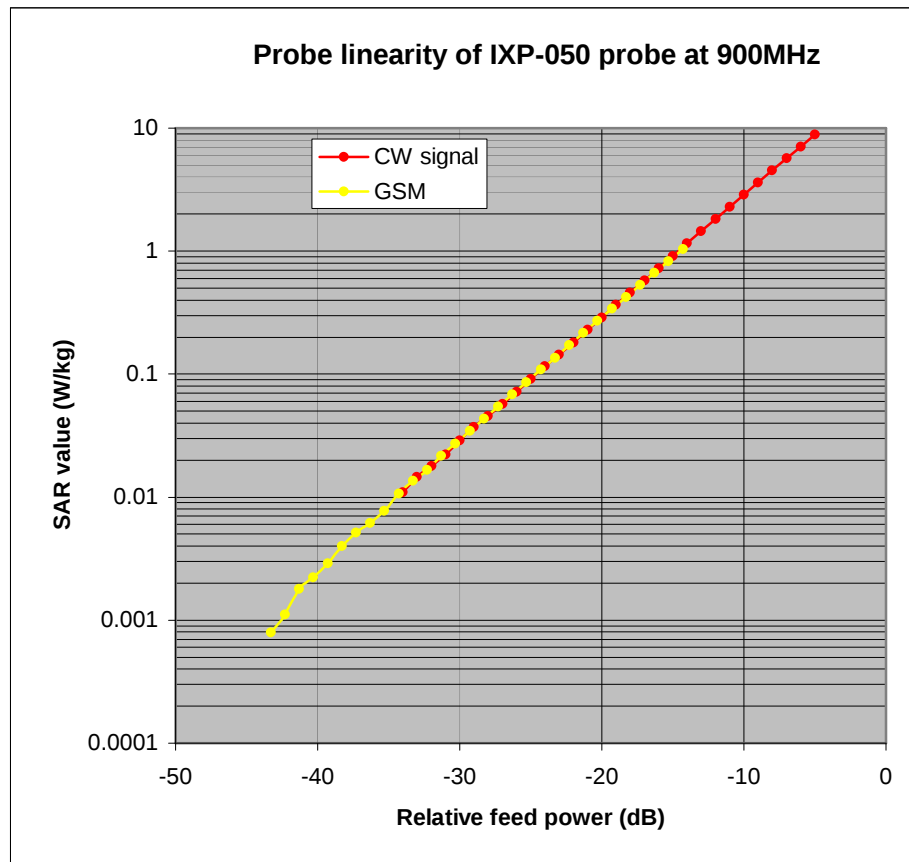


Figure 8. The GSM response of an IXP-050 probe at 900MHz.

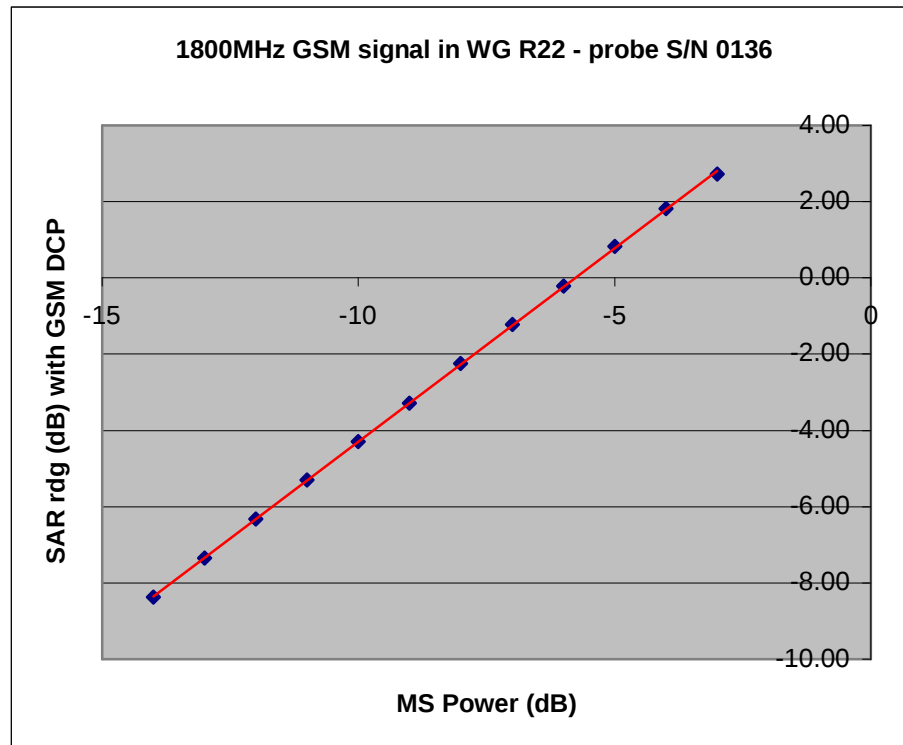


Figure 8a. The actual GSM response of IXP-050 probe S/N 0136 at 1800MHz

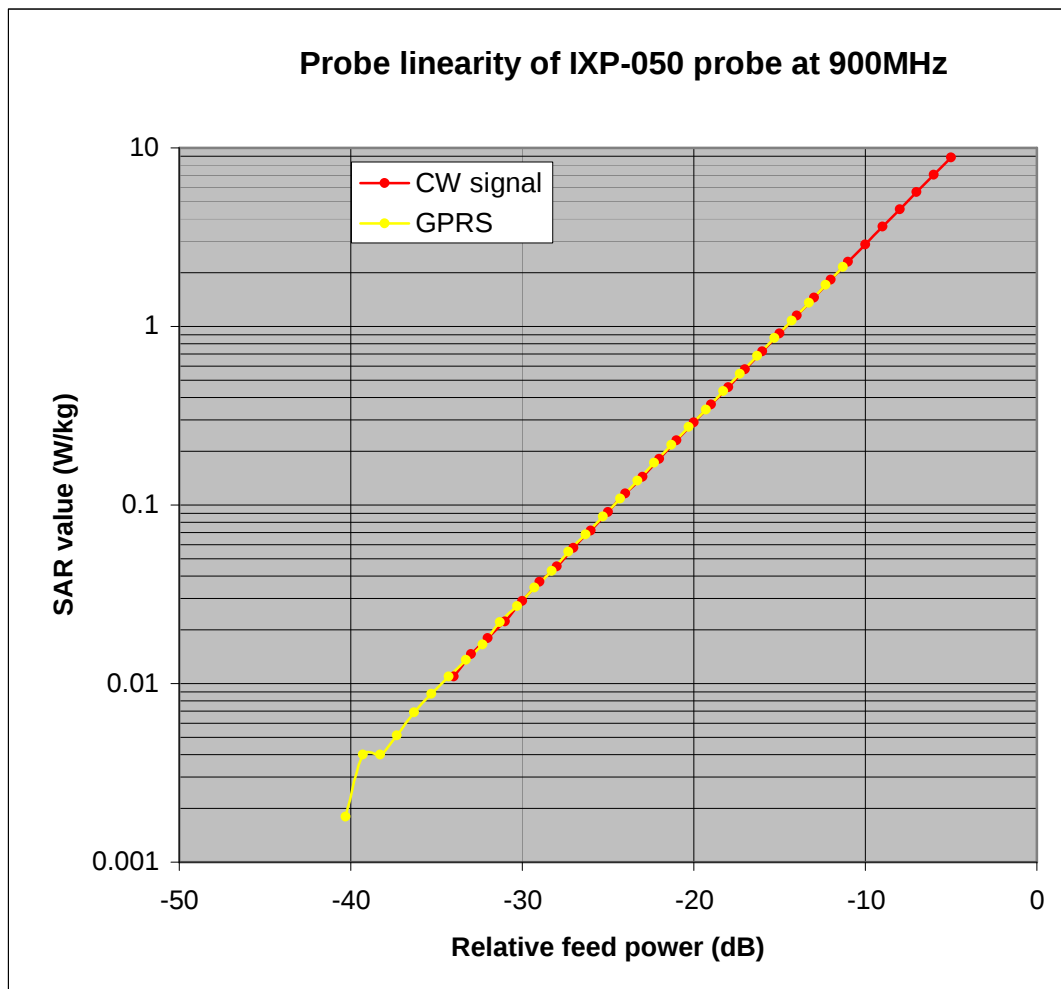
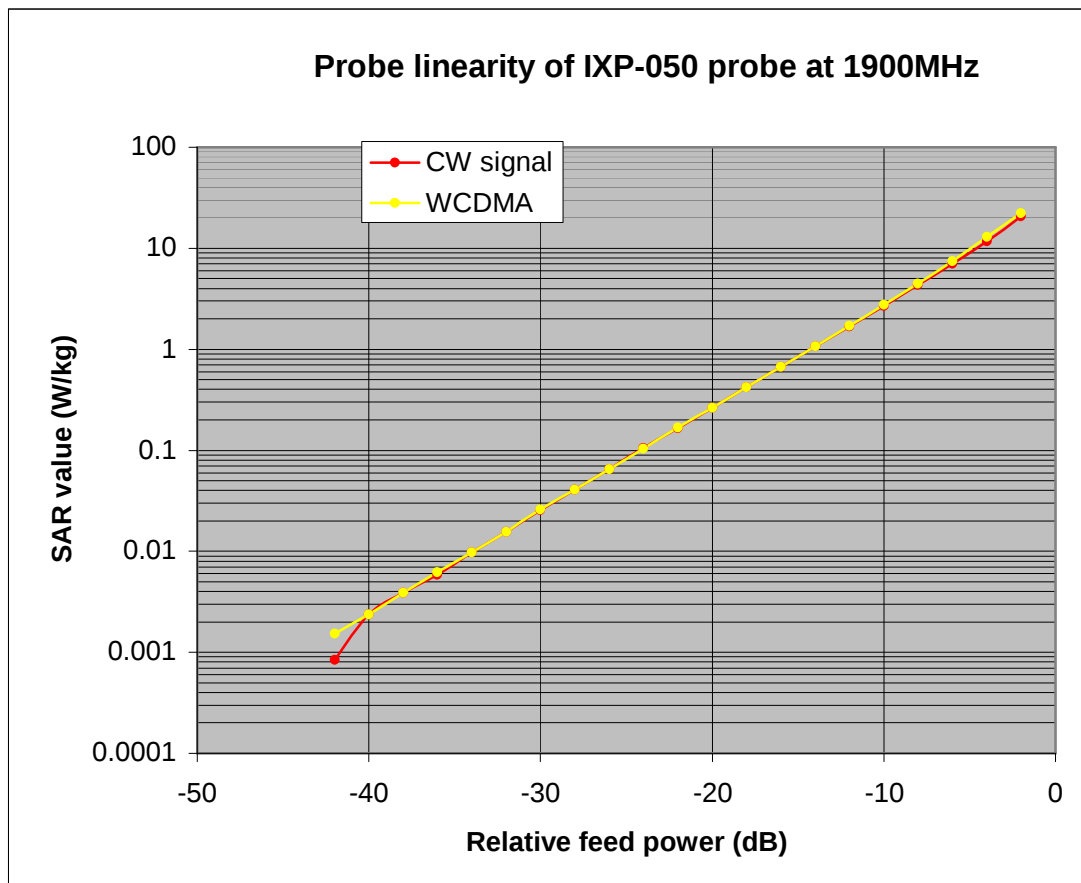


Figure 9. The GPRS response of an IXP-050 probe at 900MHz.



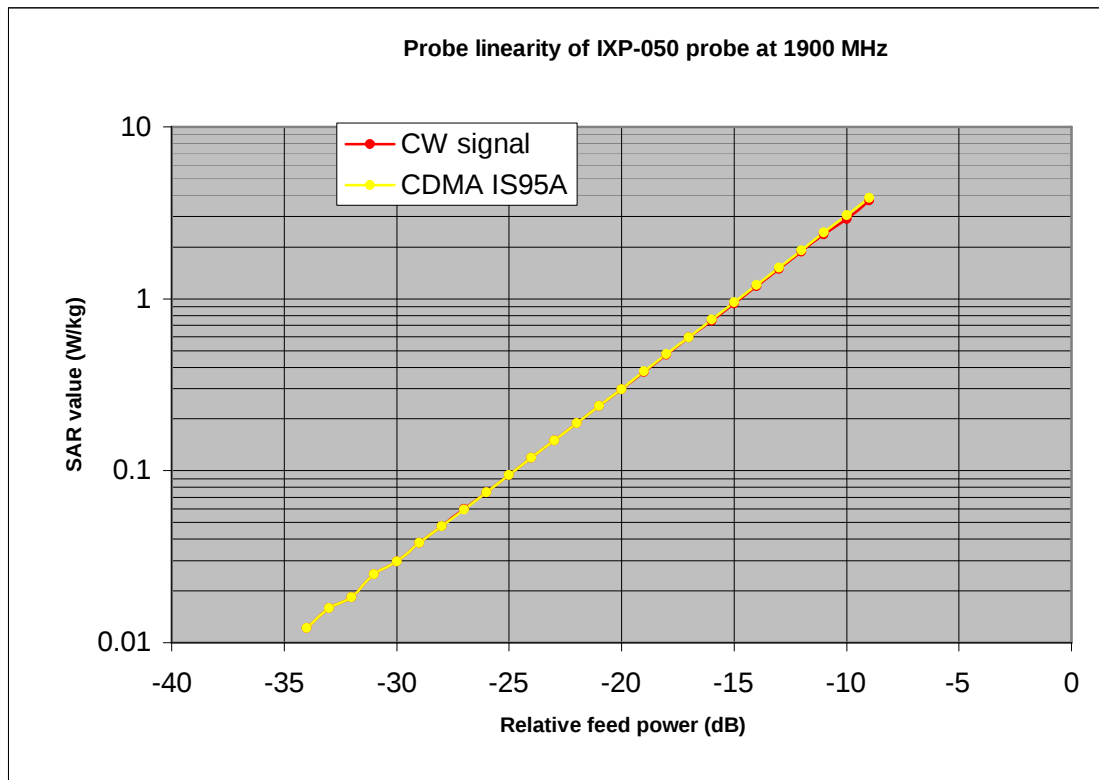


Figure 10. The CDMA response of an IXP-050 probe at 1900MHz.

Table indicating the dielectric parameters of the liquids used for calibrations at each frequency

<i>Liquid used</i>	<i>Relative permittivity (measured)</i>	<i>Conductivity (S/m) (measured)</i>
835 MHz BRAIN	43.18	0.935
835 MHz BODY	59.19	0.992
900 MHz BRAIN	42.47	0.998
900 MHz BODY	58.7	1.056
1800 MHz BRAIN	38.72	1.34
1800 MHz BODY	52.5	1.53
1900 MHz BRAIN	38.31	1.43
1900 MHz BODY	52.06	1.64
2450 MHz BRAIN	38.9	1.87
2450 MHz BODY	52.59	2.08



Indexsar Limited

Oakfield House

Cudworth Lane

Newdigate

Surrey RH5 5DR

Tel: +44 (0) 1306 631 233

Fax: +44 (0) 1306 631 834

e-mail: enquiries@indexsar.com

Calibration / Conformance statement

Balanced Validation dipole

Type: **IXD-245 2450MHz**

Manufacturer: **IndexSAR, UK**

Serial Number: **0048**

Place of Calibration: **IndexSAR, UK**

IndexSAR Limited hereby declares that the IXD series dipole named above has been checked for conformity to the specifications given in the draft IEEE 1528 and CENELEC En 50361 standards on the date shown below.

Date of Calibration/Check: **26th March 2002**

The dipole named above should be periodically re-checked using the procedures set out in the dipole calibration document. It is important that the cautions regarding handling of the dipoles (given in the calibration document) are adhered to.

Next Calibration Date: **March 2004**

The calibration measurements were carried out using the methods described in the calibration document. Where applicable, the standards used in the calibration process are traceable to the UK's National Physical Laboratory.

Calibrated By:

A handwritten signature in blue ink, appearing to read "K. M. L. B. B.", positioned above the "Calibrated By:" label.

Approved By:

A handwritten signature in black ink, appearing to read "M. J. M. M.", positioned above the "Approved By:" label.




*Report No. SN0048_2450
26th March 2003*

**INDEXSAR
2450MHz validation Dipole
Type IXD-245 S/N 0048**

Performance measurements

- *MI Manning*

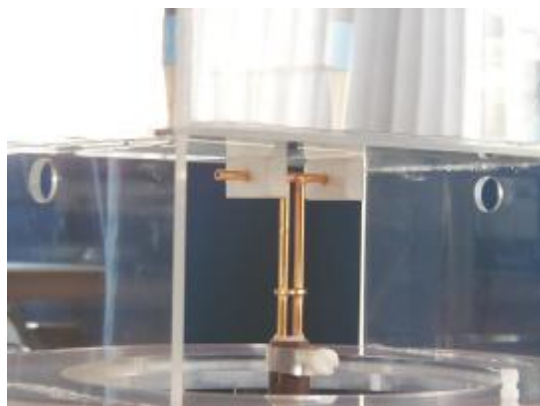

**Indexsar, Oakfield House, Cudworth Lane,
Newdigate, Surrey RH5 5DR. UK.**
Tel: +44 (0) 1306 631233 Fax: +44 (0) 1306 631834
e-mail: enquiries@indexsar.com



Indexsar Limited
Oakfield House
Cudworth Lane
Newdigate
Surrey RH5 5DR
Tel: +44 (0) 1306 631 233
Fax: +44 (0) 1306 631 834
e-mail: enquiries@indexsar.com

Calibration / Conformance statement
Balanced Validation dipole

Type: **IXD-245 2450MHz**

Manufacturer: **IndexSAR, UK**

Serial Number: **0048**

Place of Calibration: **IndexSAR, UK**

IndexSAR Limited hereby declares that the IXD series dipole named above has been checked for conformity to the specifications given in the draft IEEE 1528 and CENELEC En 50361 standards on the date shown below.


Date of Calibration/Check: **26th March 2003**

The dipole named above should be periodically re-checked using the procedures set out in the dipole calibration document. It is important that the cautions regarding handling of the dipoles (given in the calibration document) are adhered to.

Next Calibration Date: **March 2005**

The calibration measurements were carried out using the methods described in the calibration document. Where applicable, the standards used in the calibration process are traceable to the UK's National Physical Laboratory.

Calibrated By: 

Approved By: 

1. Tests on Validation Dipole

Tests have been performed on a balanced dipole made for 2450MHz application according to the construction guidelines, dimensions and tolerances given in the draft IEEE1528 standard [1]. Measurements have been made of the impedance and return loss when positioned against the liquid-filled phantom and a validation test has been performed according to the procedures set out in IEEE 1528 [1].

2. Measurement Conditions

Measurements were performed using a box-shaped phantom made of PMMA with dimensions designed to meet the accuracy criteria for reasonably-sized phantoms that do not have liquid capacities substantially in excess of the volume of liquid required to fill the Indexsar upright SAM phantoms used for SAR testing of handsets against the ear.

An HP 8753B vector network analyser was used for the return loss measurements.

The dipole was placed in a special holder made of low-permittivity, low-loss materials. This holder enables the dipole to be positioned accurately in the centre of the base of the Indexsar box-phantom used for flat-surface testing and validation checks.

The validation dipoles are supplied with special spacers made from a low-permittivity, low-loss foam material. These spacers are fitted to the dipole arms to ensure that, when the dipole is offered up to the phantom surface, the spacing between the dipole and the liquid surface is accurately aligned according to the guidance in the relevant standards documentation. The spacers are rectangular with a central hole equal to the dipole arm diameter and dimensioned so that the longer side can be used to ensure a spacing of 15mm from the liquid in the phantom (for tests at 900MHz and below) and the shorter side can be used for tests at 1800MHz and above to ensure a spacing of 10mm from the liquid in the phantom. The spacers are made on a CNC milling machine with an accuracy of $1/40^{\text{th}}$ mm but they may suffer wear and tear and need to be replaced periodically. The material used is Rohacell, which has a relative permittivity of approx. 1.05 and a negligible loss tangent.

The apparatus supplied by Indexsar for dipole validation tests thus includes:

Balanced dipoles for each frequency required are dimensioned according to the guidelines given in IEEE 1528 [1]. The dipoles are made from semi-rigid 50 Ohm co-ax, which is joined by soldering and is gold-plated subsequently. The constructed dipoles are easily deformed, if mis-handled, and periodic checks need to be made of their symmetry.

Rohacell foam spacers designed for presenting the dipoles to 2mm thick PMMA box phantoms. These components also suffer wear and tear and should be replaced when the central hole is a loose-fit on the dipole arms or if the edges are too worn to ensure accurate alignment. The standard spacers are dimensioned for use with 2mm wall thickness (additional spacers are available for 4mm wall thickness).

3. SAR Validation Measurement

A SAR validation check was performed with the box-phantom located on the SARA2 phantom support base on the SARA2 robot system. Tests were then conducted at a feed power level of approx. 0.25W. The actual power level was recorded and used to normalise the results obtained to the standard input power conditions of 1W (forward power). The ambient temperature was 24°C.


The phantom was filled with a 2450MHz brain liquid using a recipe from [1], which was measured using an Indexsar DiLine kit at 2450MHz. Measurements were taken at 23°C and 30°C and interpolation was used to

find the properties at 24°C which were as below:

Relative Permittivity **39.221**
Conductivity **1.8714 S/m**

The SARA2 software version 0.420N was used with an Indexsar probe previously calibrated using waveguide techniques.

The 3D measurement made using the dipole at the bottom of the phantom box is shown below:

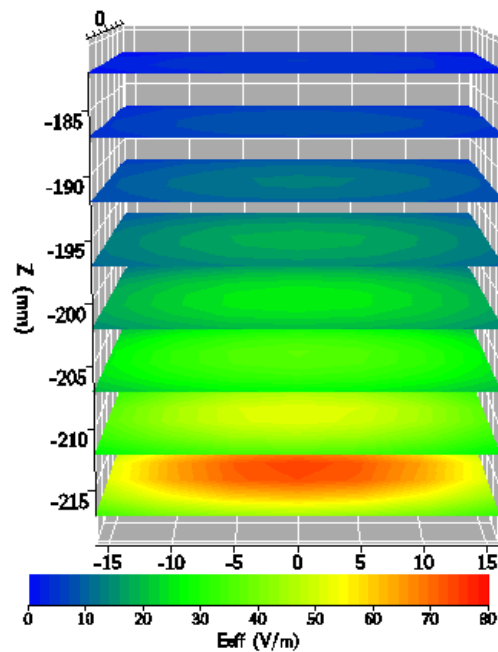

The volume-averaged SAR results, normalised to an input power of 1W (forward power) are:

Averaged over 1 cm³ (1g) of tissue **51.376 W/kg**
Averaged over 10cm³ (10g) of tissue **23.888 W/kg**

These results can be compared with Table 8.1 in [1]. The agreement is within 10%.

4. Dipole impedance and return loss


The dipoles are designed to have low return loss ONLY when presented against a lossy-phantom at the specified distance. A Vector Network Analyser (VNA) was used to perform a return loss measurement on the specific dipole when in the measurement-location against the box phantom. The distance was as specified in the standard i.e. 10mm from the liquid (for 2450MHz). The Indexsar foam spacers (described above) were used to ensure this condition during measurement.

The impedance was measured at the SMA-connector with the network analyser.

The following parameters were measured:

Dipole impedance at 2450 MHz $\text{Re}\{Z\} = 44.814 \Omega$
 $\text{Im}\{Z\} = -5.3359 \Omega$

Return loss at 2450MHz **-22.122 dB**

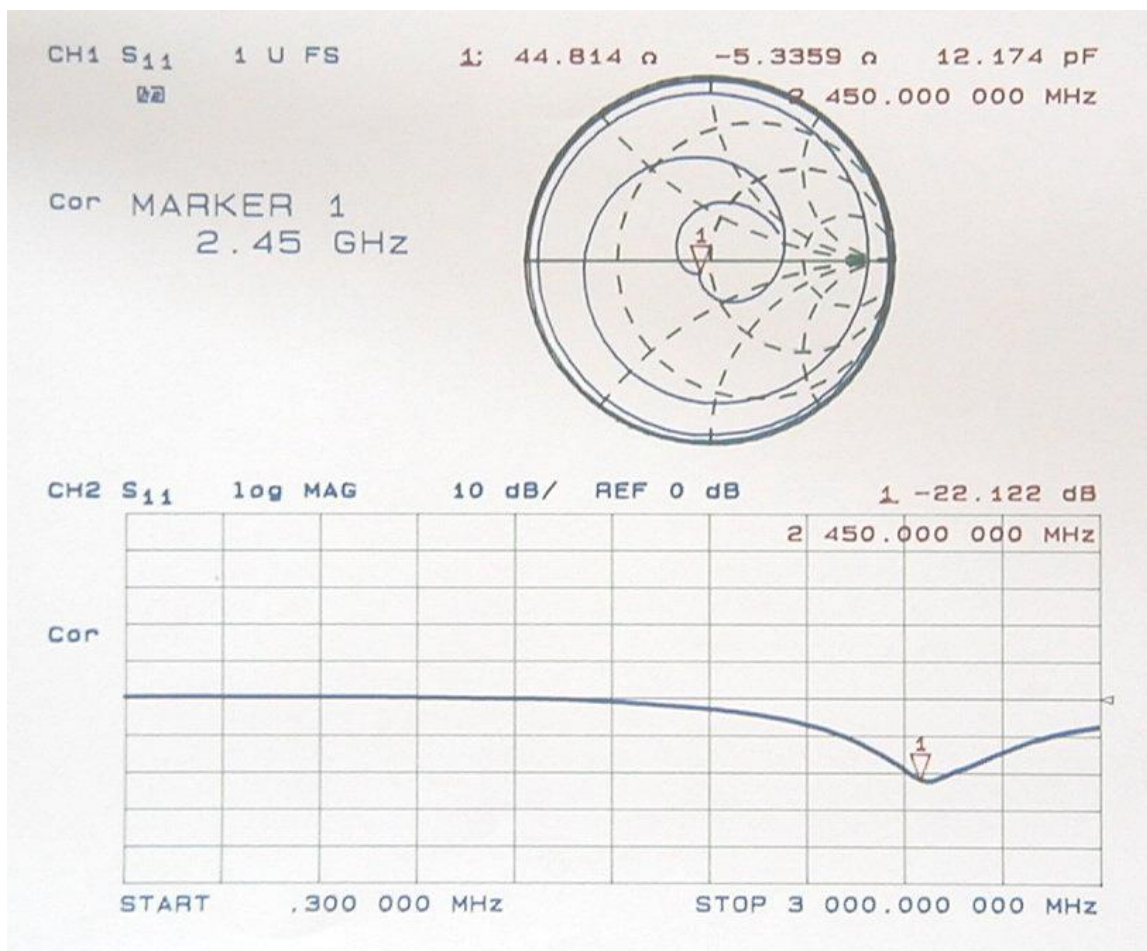

5. Dipole handling

The dipoles are made from standard, copper-sheathed coaxial cable. In assembly, the sections are joined using ordinary soft-soldering. This is necessary to avoid excessive heat input in manufacture, which would destroy the polythene dielectric used for the cable. The consequence of the construction material and the assembly technique is that the dipoles are fragile and can be deformed by rough handling. Conversely, they can be straightened quite easily as described in this report.

If a dipole is suspected of being deformed, a normal workshop lathe can be used as an alignment jig to restore the symmetry. To do this, the dipole is first placed in the headstock of the lathe (centred on the plastic or brass spacers) and the headstock is rotated by hand (do NOT use the motor). A marker (lathe tool or similar) is brought up close to the end of one dipole arm and then the headstock is rotated by 0.5 rev. to check the opposing arm. If they are not balanced, judicious deformation of the arms can be used to restore the symmetry.

If a dipole has a failed solder joint, the dipole can be fixed down in such a way that the arms are co-linear and the joint re-soldered with a reasonably-powerful electrical soldering iron. Do not use gas soldering irons. After such a repair, electrical tests must be performed as described below.

Please note that, because of their construction, the dipoles are short-circuited for DC signals.

6. Tuning the dipole

The dipole dimensions are based on calculations that assumed specific liquid dielectric properties. If the liquid dielectric properties are somewhat different, the dipole tuning will also vary. A pragmatic way of accounting for variations in liquid properties is to 'tune' the dipole (by applying minor variations to its effective length). For this purpose, Indexsar can supply short brass tube lengths to extend the length of the dipole and thus 'tune' the dipole. It cannot be made shorter without removing a bit from the arm. An alternative way to tune the dipole is to use copper shielding tape to extend the effective length of the dipole. Do both arms equally.

It should be possible to tune a dipole as described, whilst in place in the measurement position as long as the user has access to a VNA for determining the return loss.

7. Reference

[1] Draft recommended practice for determining the peak spatial-average specific absorption rate (SAR) in the human body due to wireless communications devices: Measurement Techniques. Draft CD1.1 – December 29, 2002.