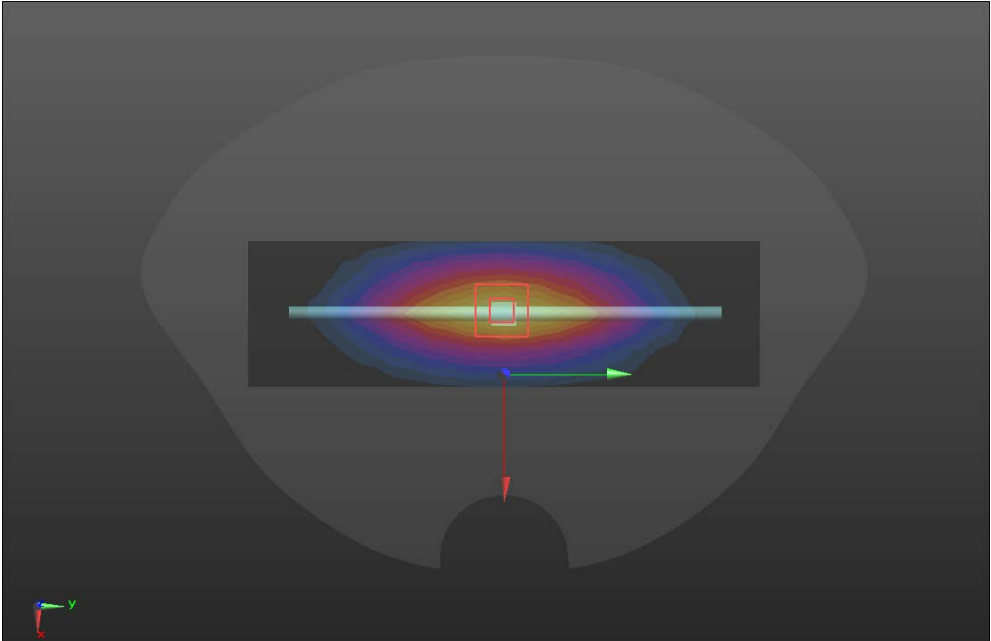
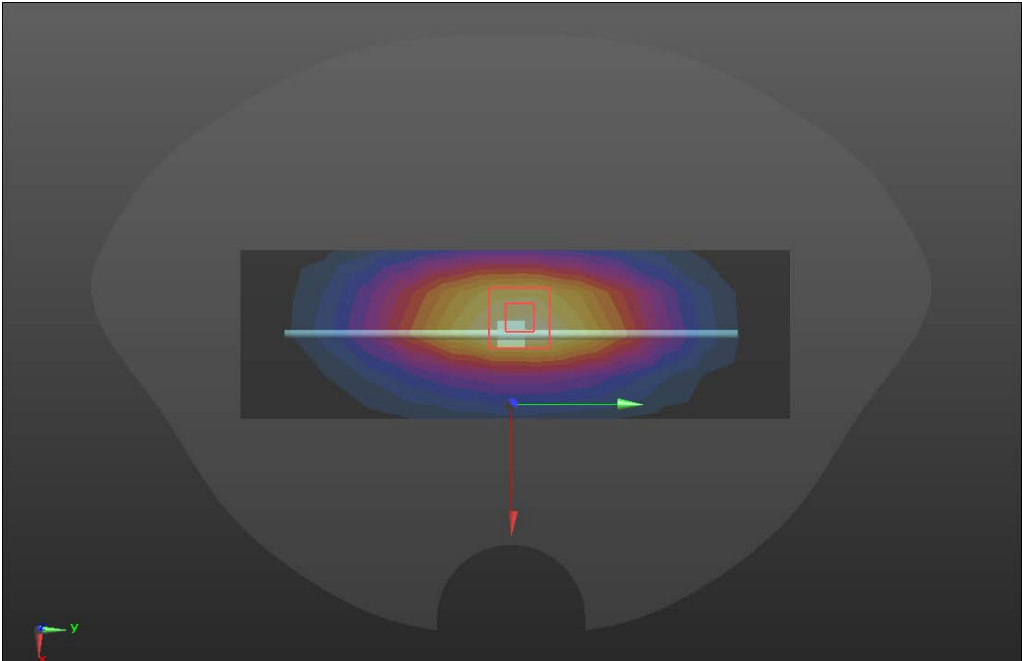


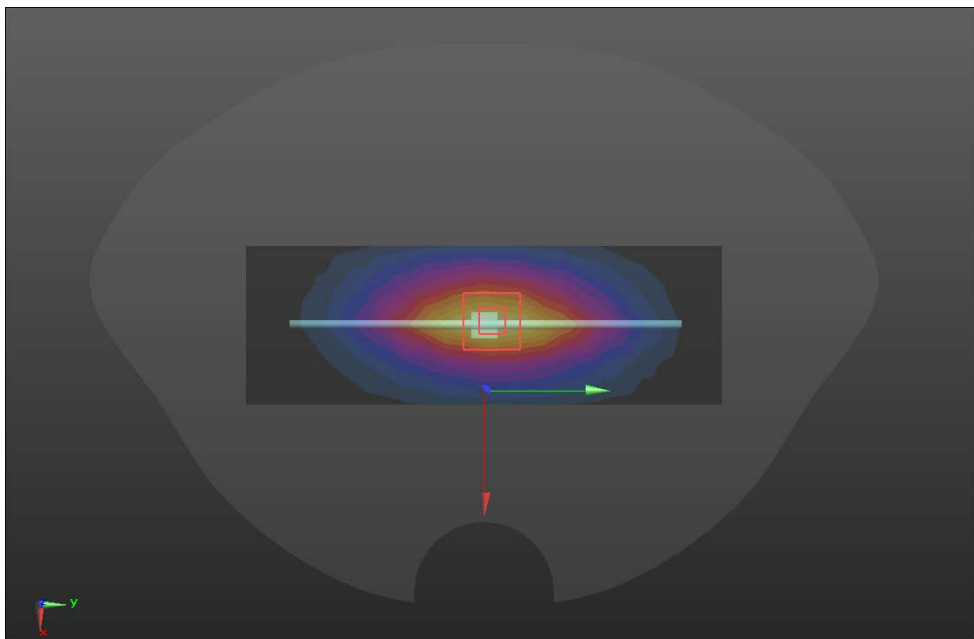
ANNEX A – TEST PLOTS

System check	750MHz
Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.93 \text{ S/m}$; $\epsilon_r = 43.07$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.35, 6.35, 6.35) @ 750 MHz; Calibrated: 2021/8/27; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2021/8/25 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) 750/Dipole 750MHz/Area Scan (5x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 2.83 W/kg 750/Dipole 750MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 58.50 V/m; Power Drift = 0.09 dB Peak SAR (extrapolated) = 3.24 W/kg SAR(1 g) = 2.14 W/kg; SAR(10 g) = 1.47 W/kg Maximum value of SAR (measured) = 2.85 W/kg 	

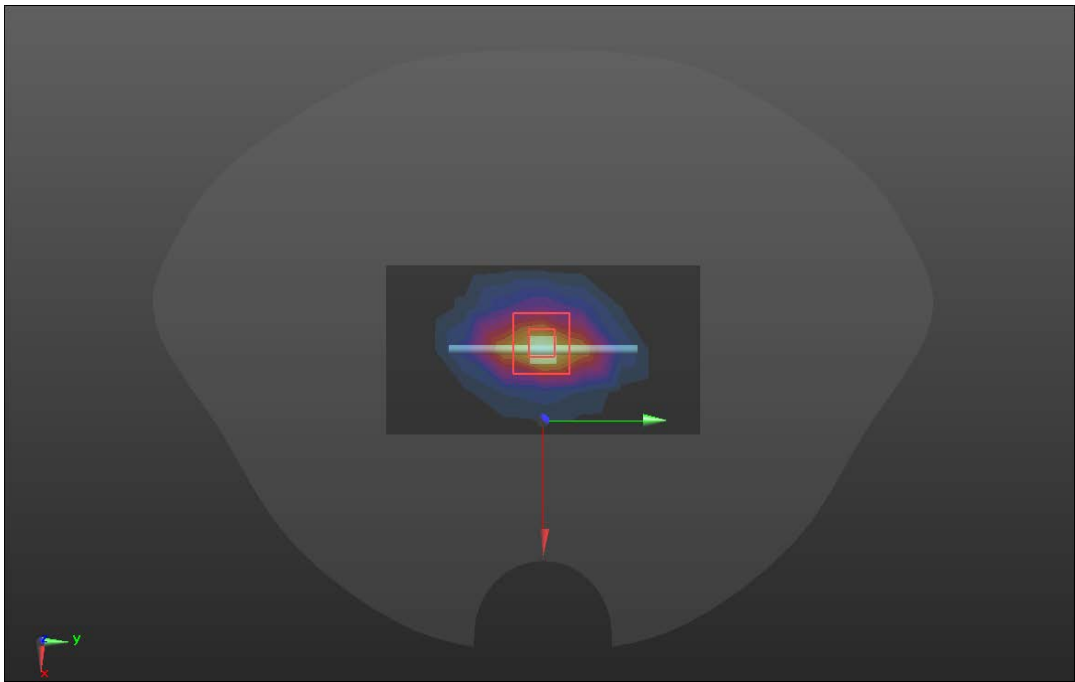
SRTC performed system check by using 250mw at antenna port

System check	835MHz
Communication System: UID 0, CW (0); Frequency: 835 MHz. Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 835 \text{ MHz}$; $\sigma = 0.93 \text{ S/m}$; $\epsilon_r = 42.99$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.13, 6.13, 6.13) @ 835 MHz; Calibrated: 2021/8/27 - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2021/8/25 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) D835/Dipole 835MHz/Area Scan (5x14x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 2.71 W/kg D835/Dipole 835MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 56.70 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 3.50 W/kg SAR(1 g) = 2.32 W/kg; SAR(10 g) = 1.52 W/kg Maximum value of SAR (measured) = 3.04 W/kg 	

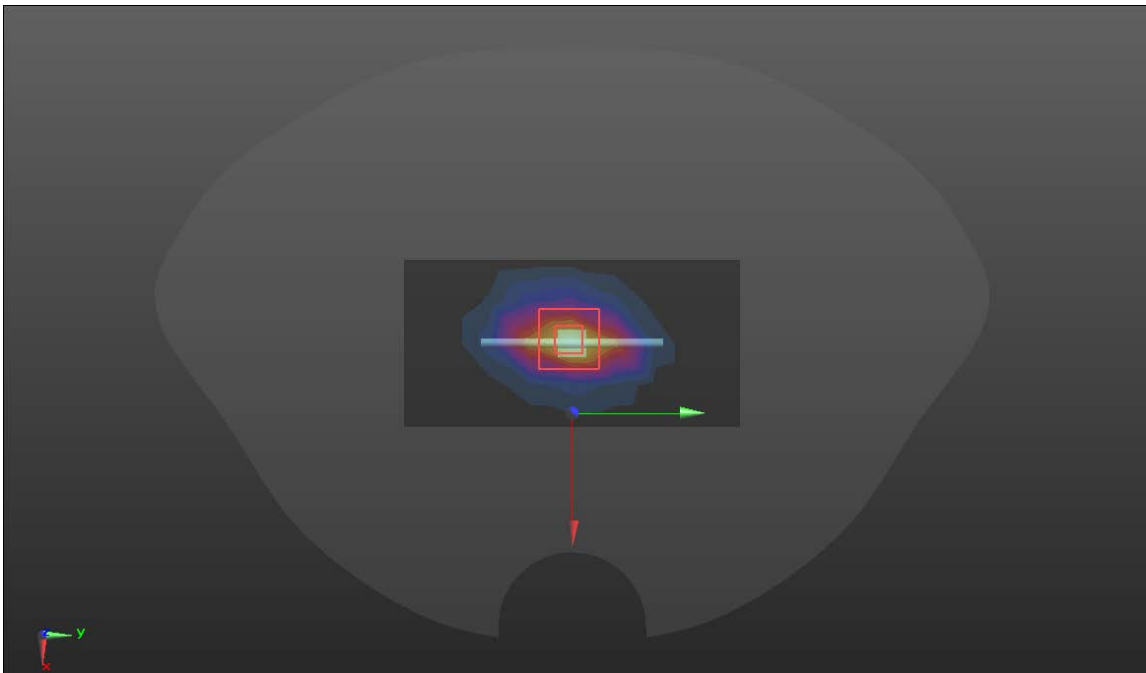
SRTC performed system check by using 250mw at antenna port

System check	900MHz
Communication System: UID 0, CW (0); Frequency: 900 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 1.01 \text{ S/m}$; $\epsilon_r = 40.05$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.13, 6.13, 6.13) @ 900 MHz; Calibrated: 2021/8/27 - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2021/8/25 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) D900/Dipole 900MHz/Area Scan (5x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 3.85 W/kg D900/Dipole 900MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 66.17 V/m; Power Drift = 0.00 dB Peak SAR (extrapolated) = 4.74 W/kg SAR(1 g) = 2.68 W/kg; SAR(10 g) = 1.83 W/kg Maximum value of SAR (measured) = 3.99 W/kg 	

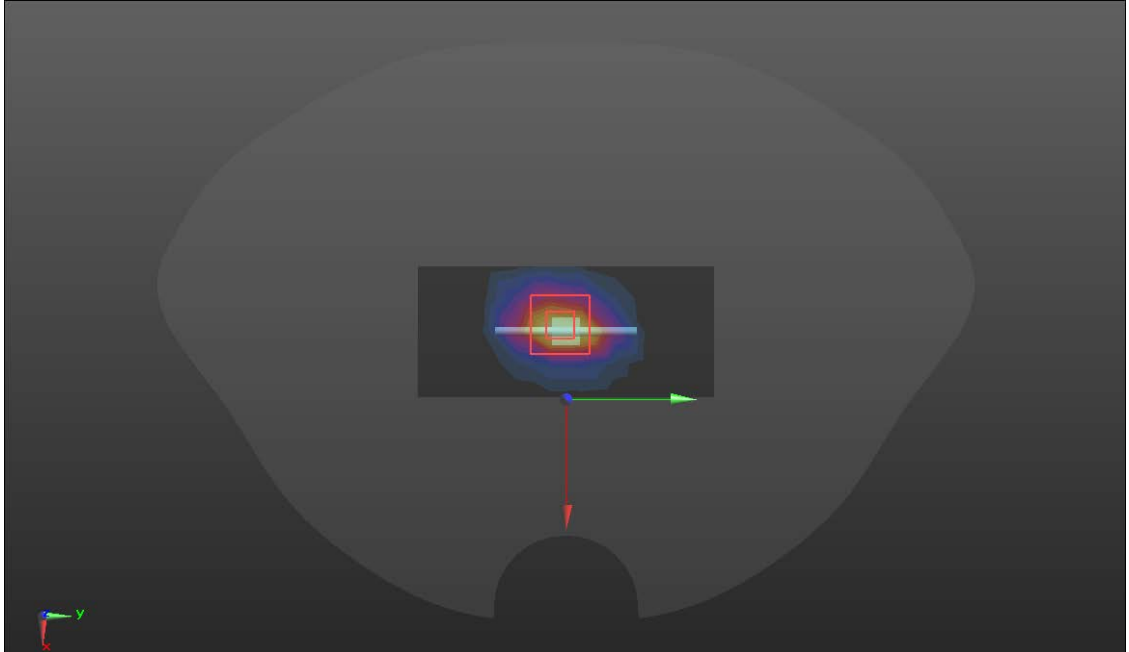
SRTC performed system check by using 250mw at antenna port

System check	1800MHz
Communication System: UID 0, CW (0); Frequency: 1800 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 1800 \text{ MHz}$; $\sigma = 1.4 \text{ S/m}$; $\epsilon_r = 39.31$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(5.08, 5.08, 5.08) @ 1800 MHz; Calibrated: 2021/8/27 - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2021/8/25 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) D1800/Dipole 1800MHz/Area Scan (5x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 15.3 W/kg D1800/Dipole 1800MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 107.8 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 18.7 W/kg SAR(1 g) = 10.0 W/kg; SAR(10 g) = 5.22 W/kg Maximum value of SAR (measured) = 15.6 W/kg 	

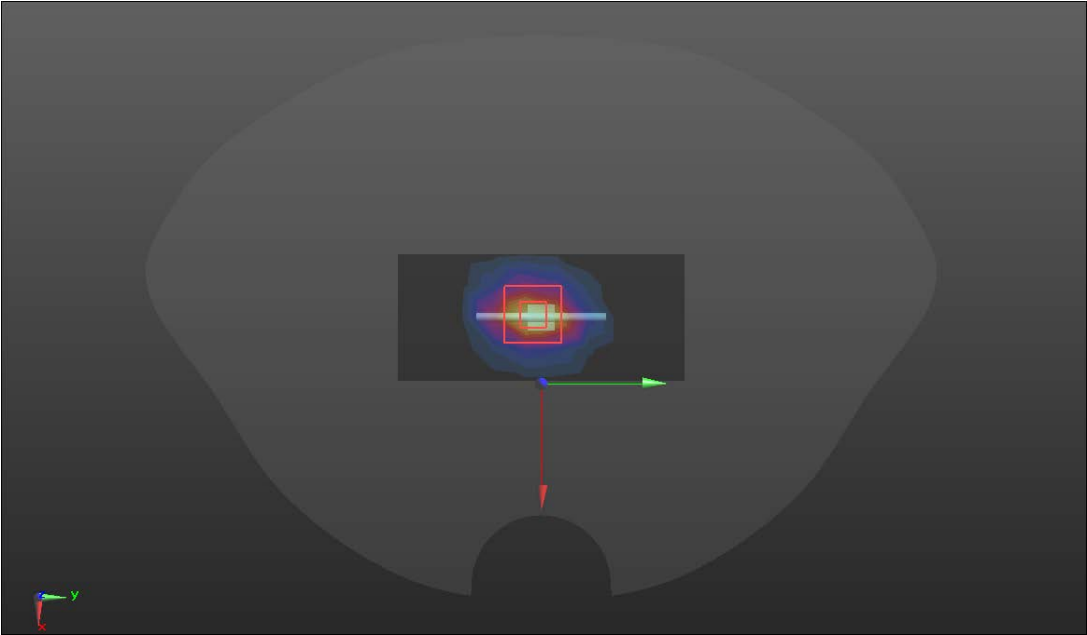
SRTC performed system check by using 250mw at antenna port

System check	2000MHz
Communication System: UID 0, CW (0); Frequency: 2000 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 2000 \text{ MHz}$; $\sigma = 1.47 \text{ S/m}$; $\epsilon_r = 41.31$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(5, 5, 5) @ 2000 MHz; Calibrated: 2021/8/27 - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2021/8/25 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) D2000/Dipole 2000MHz/Area Scan (5x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 15.2 W/kg D2000/Dipole 2000MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 107.6 V/m; Power Drift = 0.04 dB Peak SAR (extrapolated) = 18.9 W/kg SAR(1 g) = 10.64 W/kg; SAR(10 g) = 4.99 W/kg Maximum value of SAR (measured) = 15.5 W/kg 	

SRTC performed system check by using 250mw at antenna por

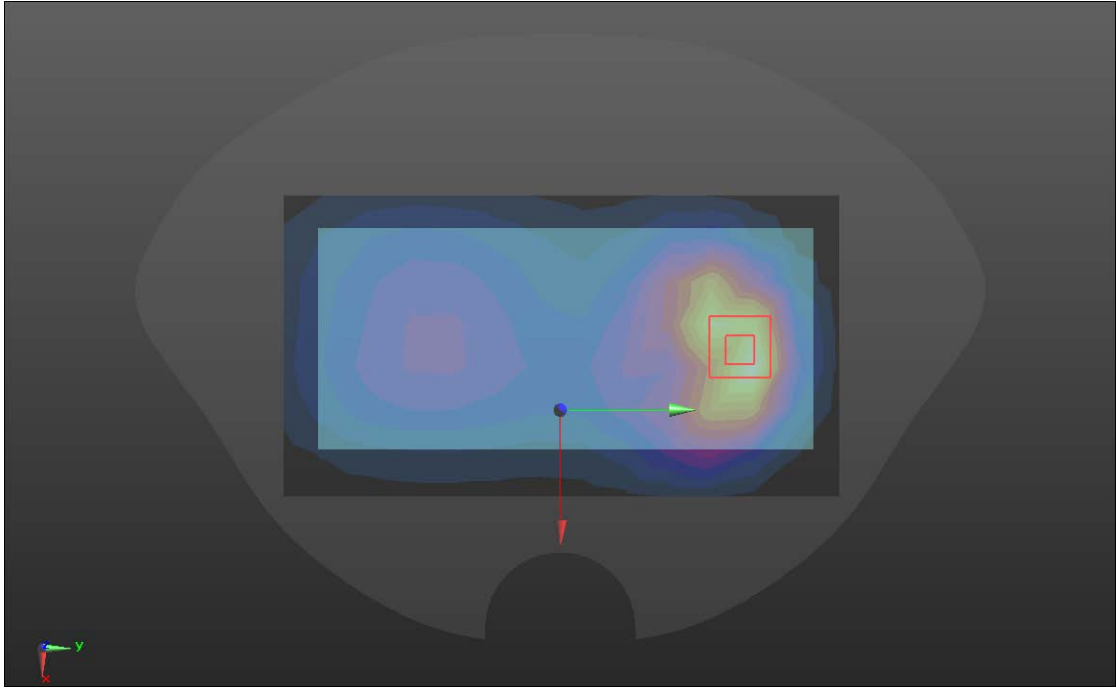
System check	2450MHz
Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.74 \text{ S/m}$; $\epsilon_r = 40.83$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.5, 4.5, 4.5) @ 2450 MHz; Calibrated: 2021/8/27 - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2021/8/25 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) D2450/Dipole 2450MHz/Area Scan (5x10x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 18.1 W/kg D2450/Dipole 2450MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 107.6 V/m; Power Drift = 0.06 dB Peak SAR (extrapolated) = 25.1 W/kg SAR(1 g) = 12.69 W/kg; SAR(10 g) = 6.36 W/kg Maximum value of SAR (measured) = 20.3 W/kg 	

SRTC performed system check by using 250mw at antenna port

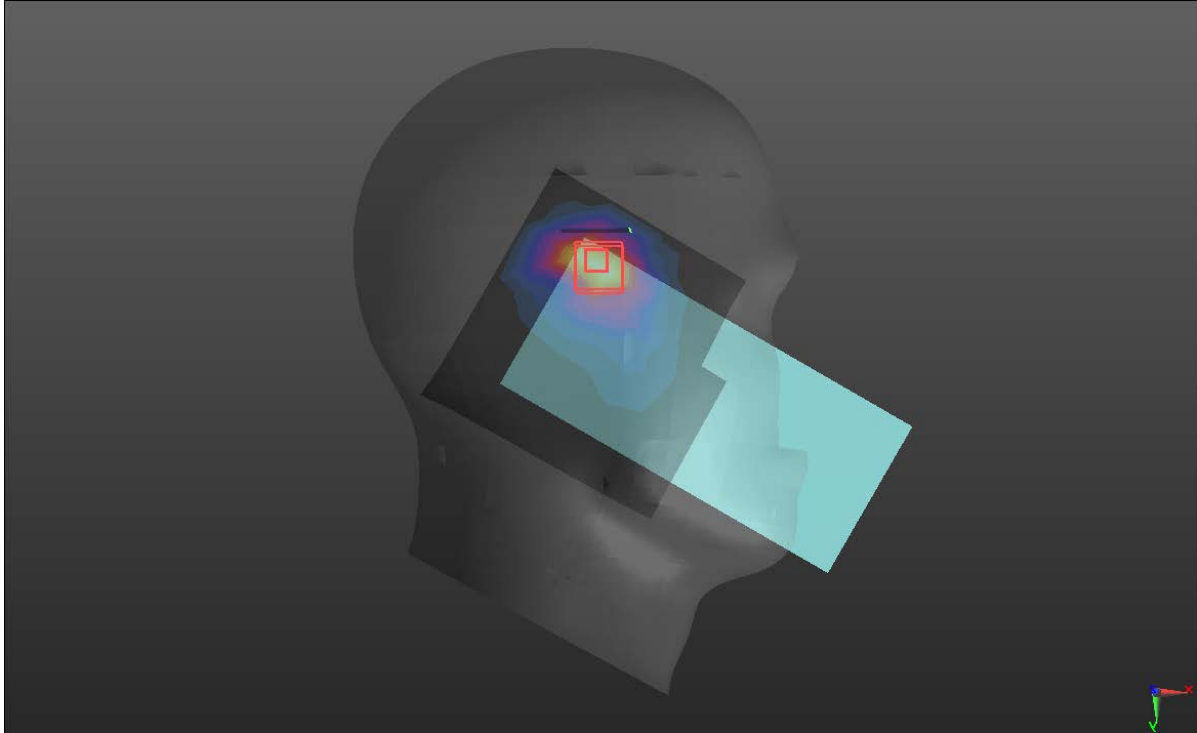
System check	2600MHz
Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 2600 \text{ MHz}$; $\sigma = 1.92 \text{ S/m}$; $\epsilon_r = 38.65$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.33, 4.33, 4.33) @ 2600 MHz; Calibrated: 2021/8/27 - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2021/8/25 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) D2600/Dipole 2600MHz/Area Scan (5x10x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 21.0 W/kg D2600/Dipole 2600MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 107.0 V/m; Power Drift = 0.00 dB Peak SAR (extrapolated) = 27.8 W/kg SAR(1 g) = 14.02 W/kg; SAR(10 g) = 6.53 W/kg Maximum value of SAR (measured) = 21.7 W/kg 	

SRTC performed system check by using 250mw at antenna port

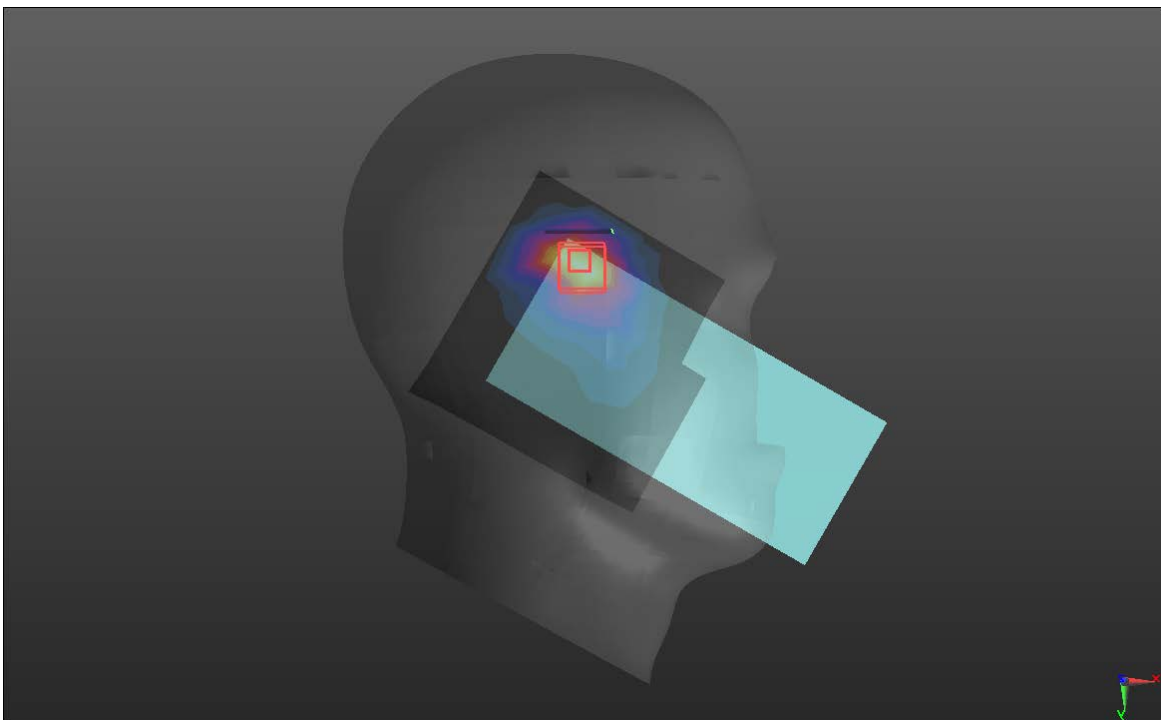
GSM 850

Hotspot	Back
Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 2:8 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.528$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.13, 6.13, 6.13); Calibrated: 2021/8/27; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2021/8/25 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) BACK/GSM850/Area Scan (14x8x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.277 W/kg BACK/GSM850/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 8.784 V/m; Power Drift = -0.12 dB Peak SAR (extrapolated) = 0.467 W/kg SAR(1 g) = 0.285 W/kg; SAR(10 g) = 0.149 W/kg Maximum value of SAR (measured) = 0.313 W/kg 	

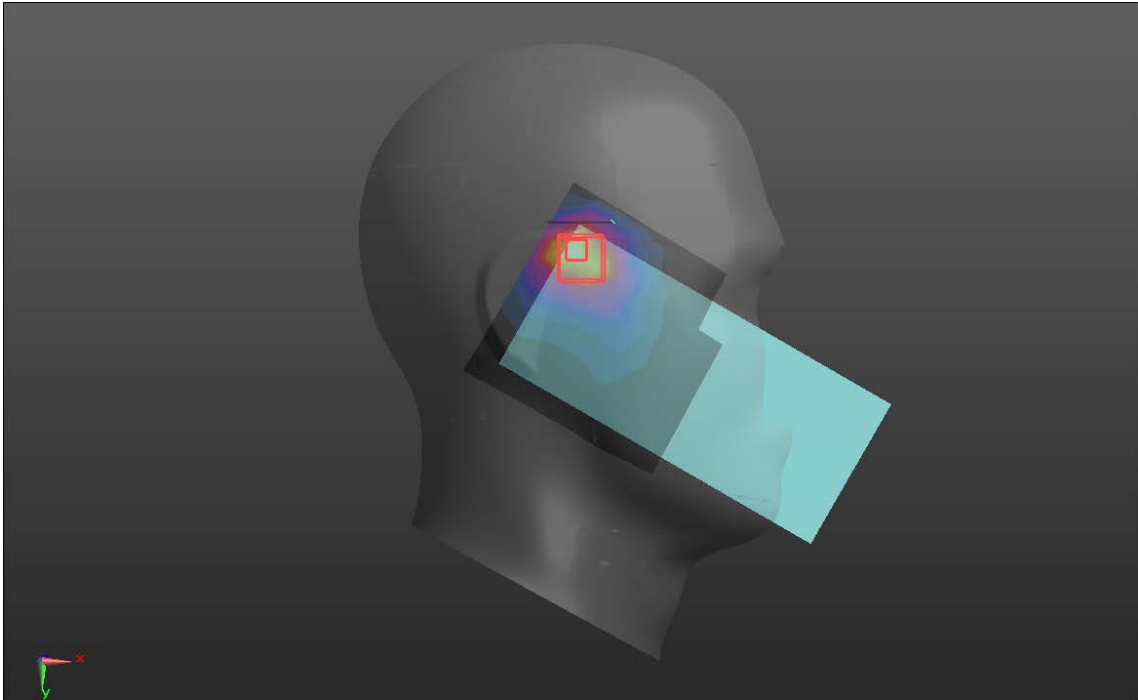
GSM 1900

Head	Right cheek
Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz;Duty Cycle: 3:8 Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(5.08, 5.08, 5.08); Calibrated: 2021/8/27; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2021/8/25 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) RC/GSM1900/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 1.32 W/kg RC/GSM1900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 12.73 V/m; Power Drift = 0.11 dB Peak SAR (extrapolated) = 2.41 W/kg SAR(1 g) = 1.17 W/kg; SAR(10 g) = 0.607 W/kg Maximum value of SAR (measured) = 1.57 W/kg 	

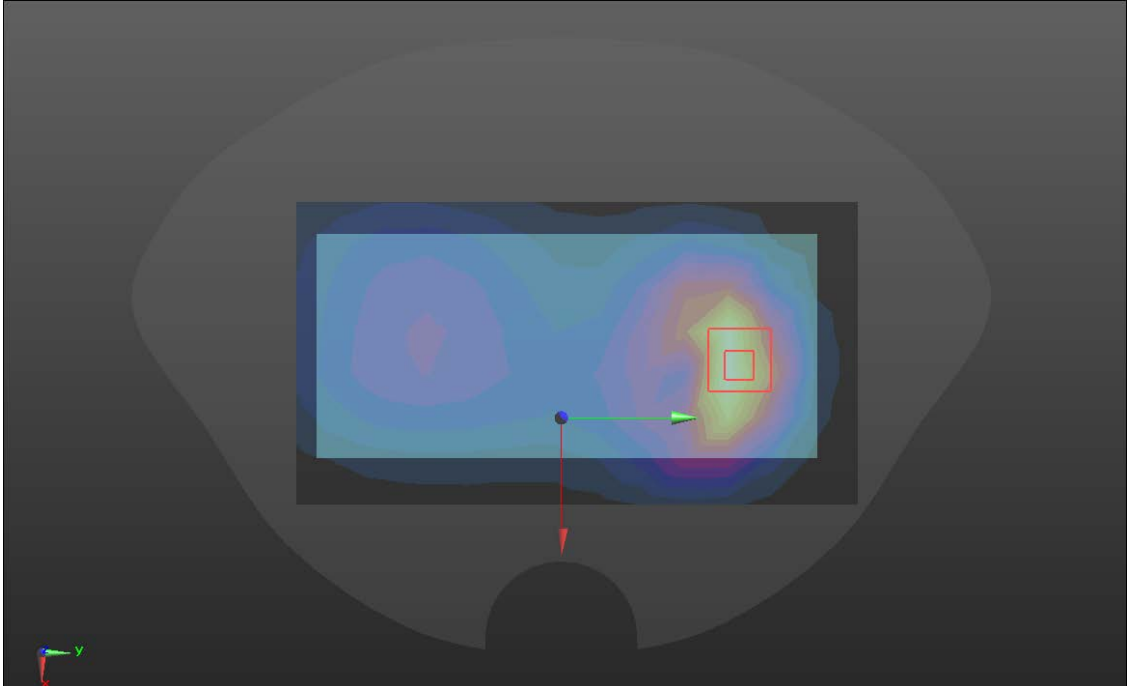
WCDMA BAND II

Head	Right cheek
Communication System: UID 0, WCDMA BAND2 (0); Frequency: 1880 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1880 \text{ MHz}$; $\sigma = 1.4 \text{ S/m}$; $\epsilon_r = 40$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Right Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(5.08, 5.08, 5.08); Calibrated: 2021/8/27; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2021/8/25 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) RC/W2/Area Scan (8x8x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.931 W/kg RC/W2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 14.00 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 1.59 W/kg SAR(1 g) = 0.820 W/kg; SAR(10 g) = 0.419 W/kg Maximum value of SAR (measured) = 1.00 W/kg	
	

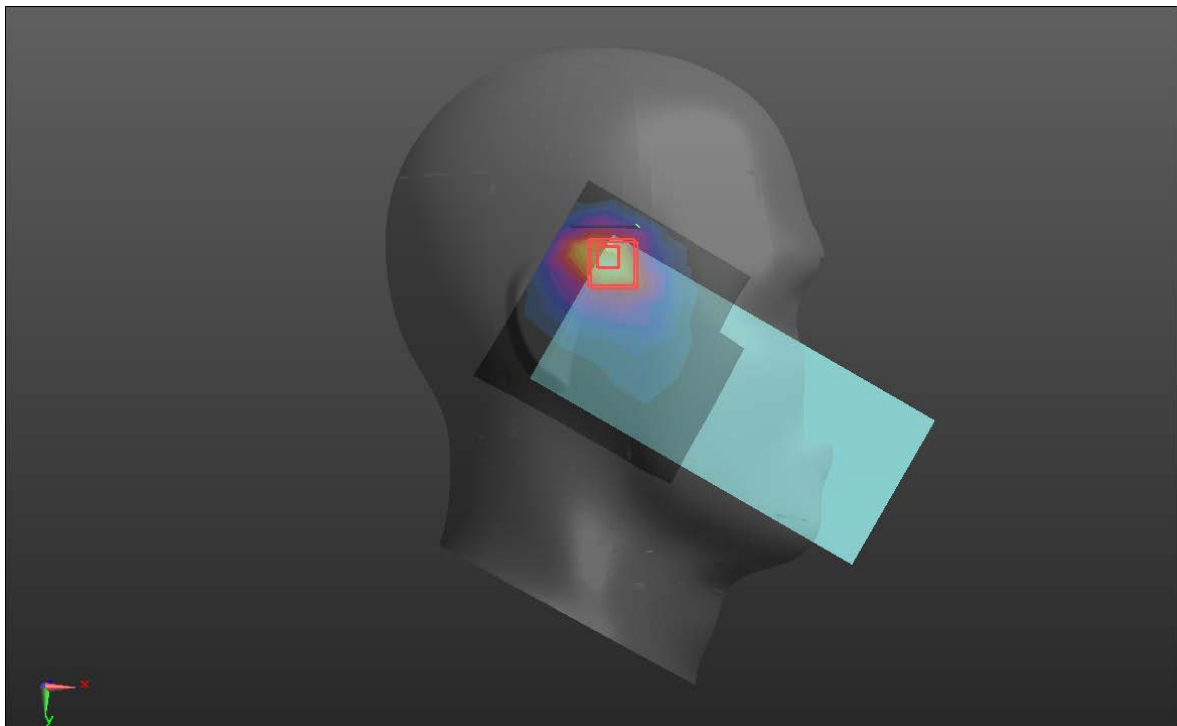
WCDMA BAND IV

Head	Right cheek
Communication System: UID 0, WCDMA BAND4 (0); Frequency: 1732.6 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1732.6 \text{ MHz}$; $\sigma = 1.376 \text{ S/m}$; $\epsilon_r = 40.07$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Right Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(5.08, 5.08, 5.08); Calibrated: 2021/8/27; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2021/8/25 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) RC/W4 2/Area Scan (8x8x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 1.39 W/kg RC/W4 2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 16.75 V/m; Power Drift = -0.07 dB Peak SAR (extrapolated) = 2.20 W/kg SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.673 W/kg Maximum value of SAR (measured) = 1.43 W/kg 	

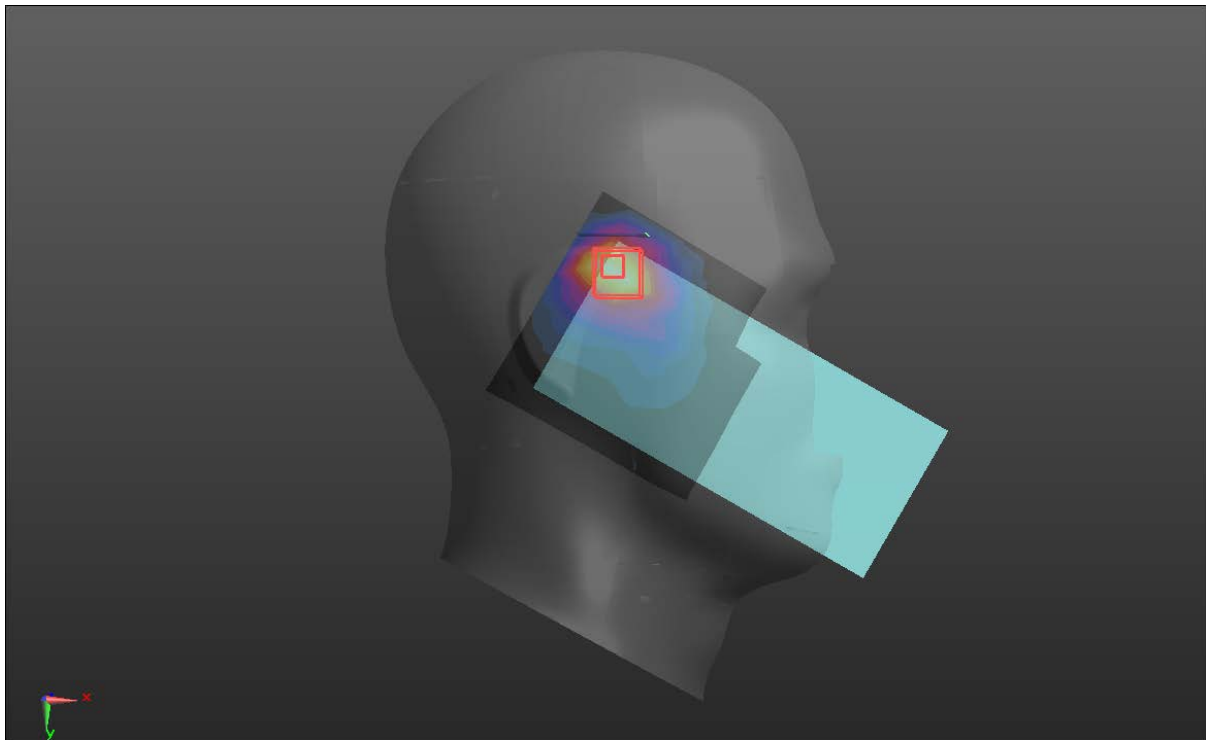
WCDMA BAND V

Hotspot	Back
Communication System: UID 0, WCDMA BAND 5 (0); Frequency: 836.6 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.905 \text{ S/m}$; $\epsilon_r = 41.528$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.13, 6.13, 6.13); Calibrated: 2021/8/27; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2021/8/25 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) BACK/W5/Area Scan (14x8x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.282 W/kg BACK/W5/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 8.515 V/m; Power Drift = -0.14 dB Peak SAR (extrapolated) = 0.424 W/kg SAR(1 g) = 0.242 W/kg; SAR(10 g) = 0.139 W/kg Maximum value of SAR (measured) = 0.298 W/kg 	

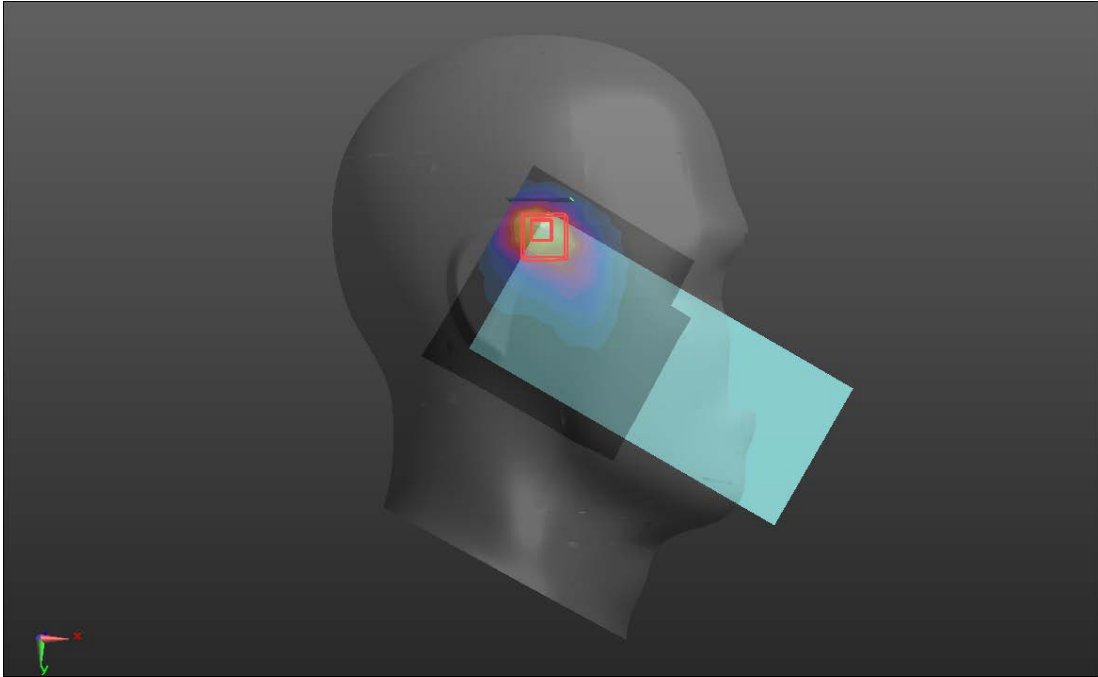
LTE BAND 2

Head	Right cheek
Communication System: UID 0, LTE band 02 (0); Frequency: 1880 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(5.08, 5.08, 5.08); Calibrated: 2021/8/27; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2021/8/25 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) RC/LTE B2 -/Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 1.19 W/kg RC/LTE B2 -/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 16.06 V/m; Power Drift = 0.07 dB Peak SAR (extrapolated) = 2.05 W/kg SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.547 W/kg Maximum value of SAR (measured) = 1.30 W/kg 	

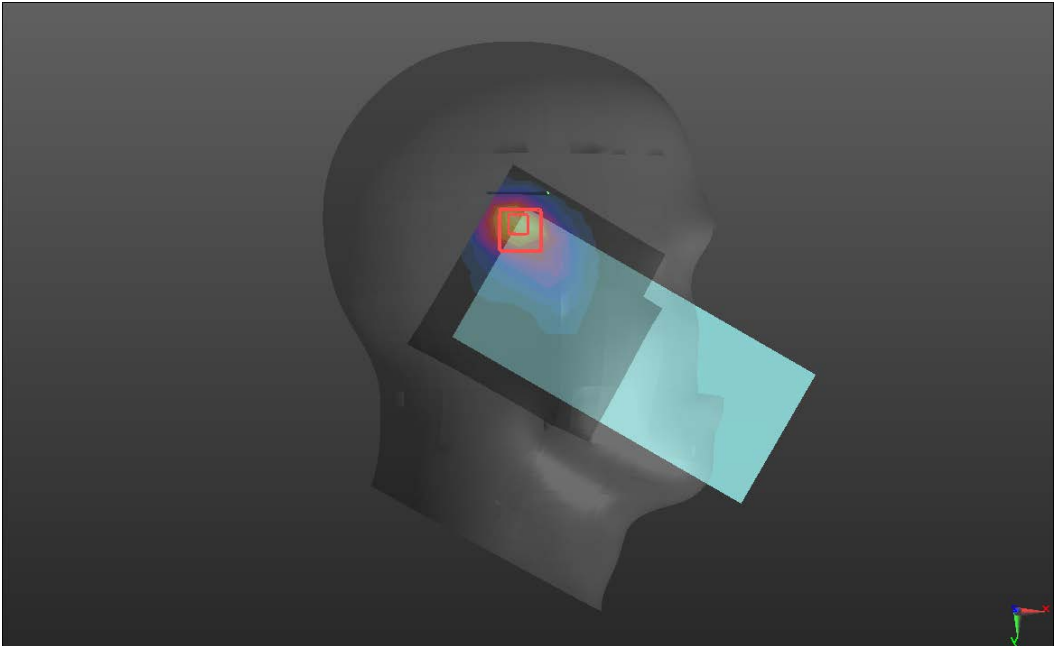
LTE BAND 4

Head	Right cheek
Communication System: UID 0, LTE band 4 (0); Frequency: 1732.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 40.07$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(5.08, 5.08, 5.08); Calibrated: 2021/8/27; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2021/8/25 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) RC/LTE B4- 2/Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.919 W/kg RC/LTE B4- 2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 14.29 V/m; Power Drift = -0.12 dB Peak SAR (extrapolated) = 1.51 W/kg SAR(1 g) = 0.834 W/kg; SAR(10 g) = 0.464 W/kg Maximum value of SAR (measured) = 0.996 W/kg	
	

LTE BAND 7

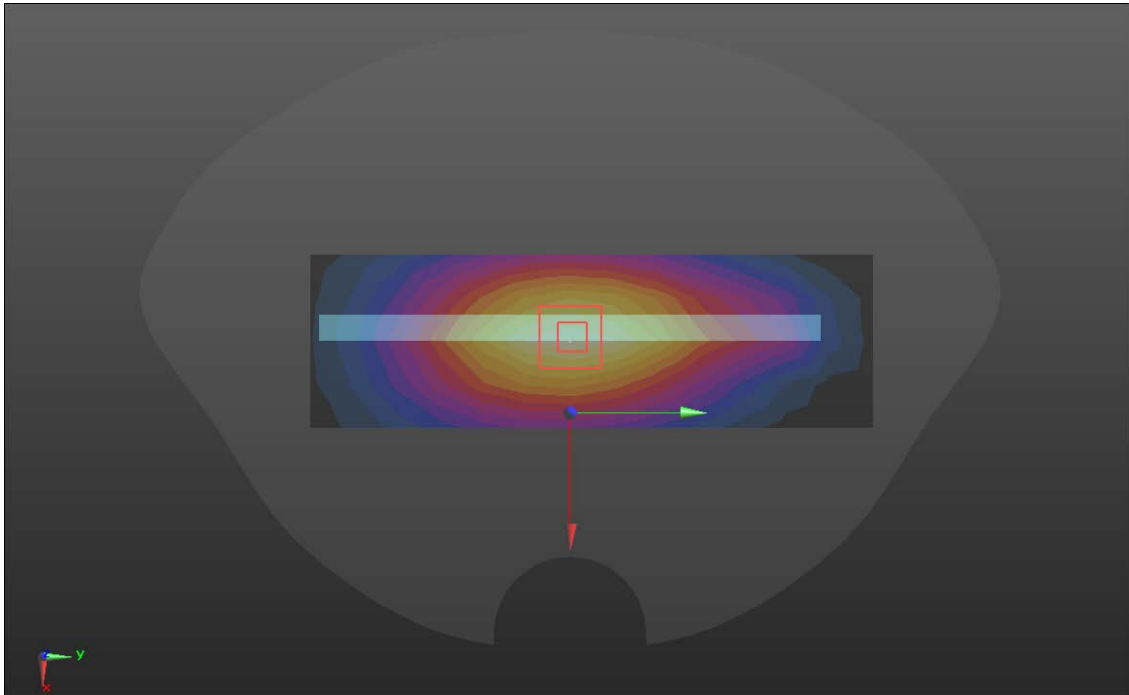
Head	Right cheek
Communication System: UID 0, LTE Band 7 (0); Frequency: 2535 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.888$ S/m; $\epsilon_r = 39.084$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.5, 4.5, 4.5); Calibrated: 2021/8/27; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2021/8/25 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) RC/LTE B7-/Area Scan (10x10x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 1.47 W/kg RC/LTE B7-/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 11.43 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 2.59 W/kg SAR(1 g) = 1.153 W/kg; SAR(10 g) = 0.538 W/kg Maximum value of SAR (measured) = 1.57 W/kg 	

LTE BAND 7*

Head	Right cheek
Communication System: UID 0, LTE Band 7 (0); Frequency: 2535 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.888$ S/m; $\epsilon_r = 39.084$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.5, 4.5, 4.5); Calibrated: 2021/8/27; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2021/8/25 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) RC/LTE B7- second supply/Area Scan (10x10x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 1.31 W/kg RC/LTE B7- second supply/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 11.27 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 2.52 W/kg SAR(1 g) = 1.144 W/kg; SAR(10 g) = 0.422 W/kg Maximum value of SAR (measured) = 1.47 W/kg 	

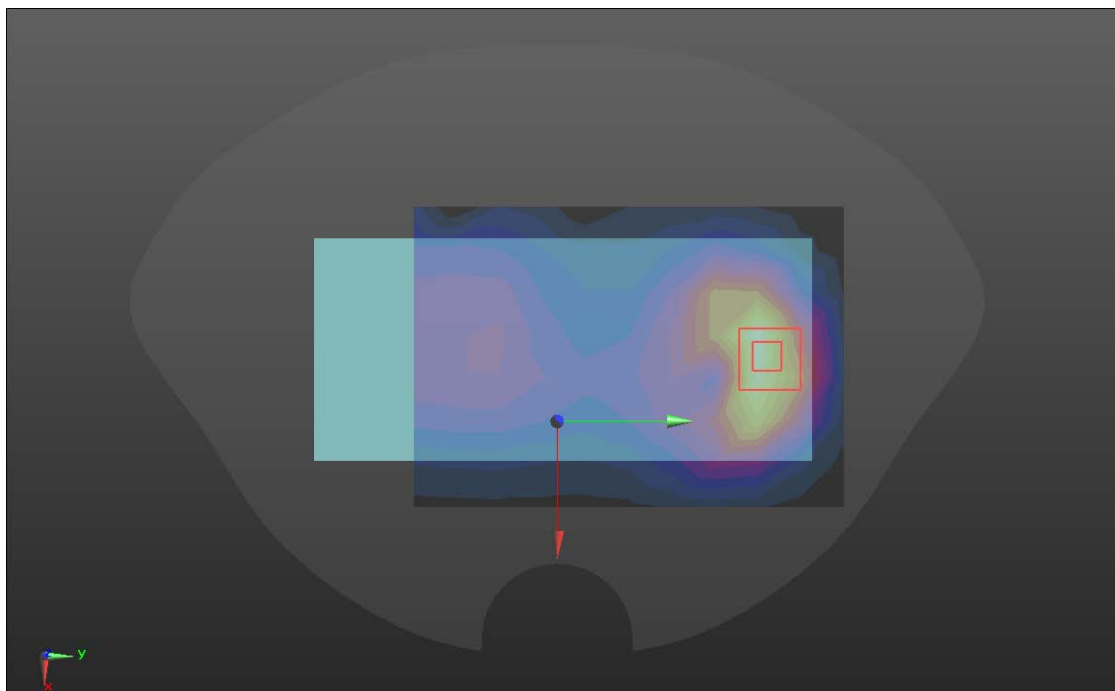
Note: * represents the secondary supply.

LTE BAND 12

Hotspot	Right
Communication System: UID 0, LTE Band 12 (0); Frequency: 707.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 707.5 \text{ MHz}$; $\sigma = 0.887 \text{ S/m}$; $\epsilon_r = 42.115$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.35, 6.35, 6.35); Calibrated: 2021/8/27; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2021/8/25 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) RIGHT/LTE B12/Area Scan (5x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.315 W/kg RIGHT/LTE B12/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 19.34 V/m; Power Drift = -0.01 dB Peak SAR (extrapolated) = 0.387 W/kg SAR(1 g) = 0.280 W/kg; SAR(10 g) = 0.199 W/kg Maximum value of SAR (measured) = 0.318 W/kg	
	

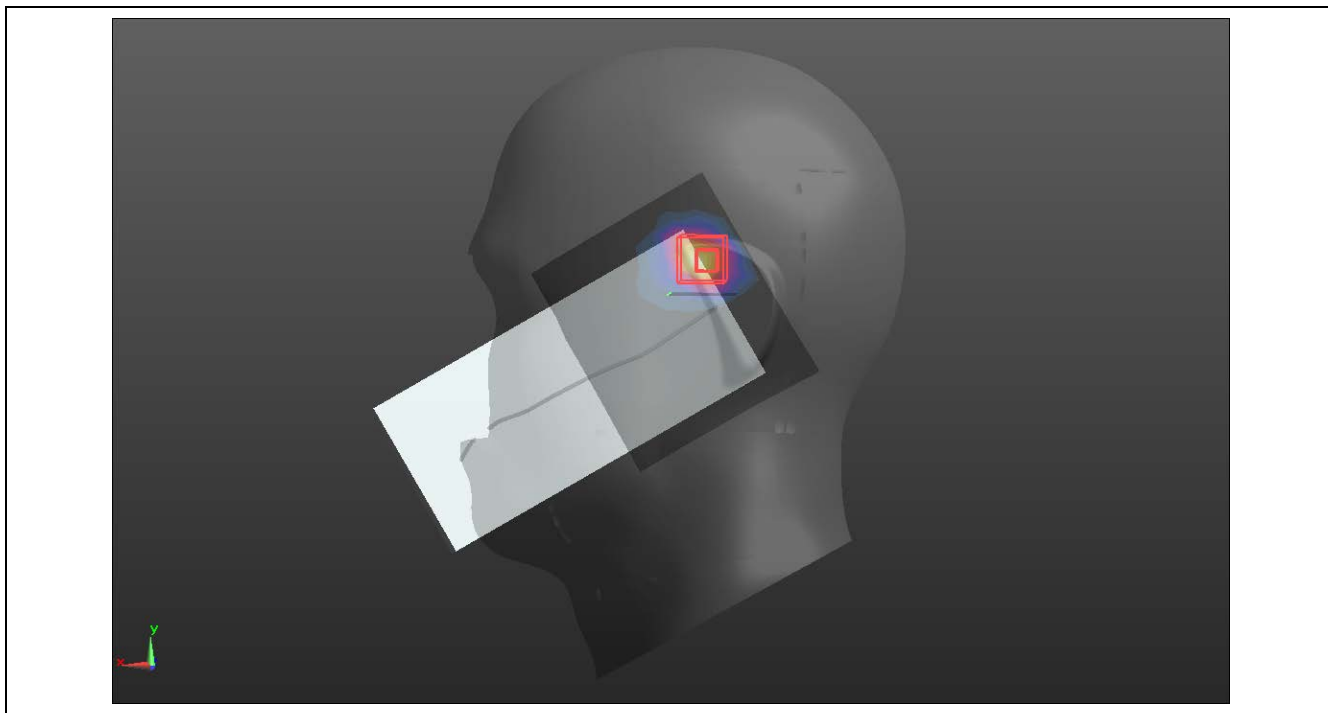
LTE BAND 26

Hotspot	Back
Communication System: UID 0, LTE Band 26 (0); Frequency: 831.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 831.5 \text{ MHz}$; $\sigma = 0.904 \text{ S/m}$; $\epsilon_r = 41.539$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.13, 6.13, 6.13); Calibrated: 2021/8/27; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2021/8/25 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) BACK/LTE B26/Area Scan (11x8x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.340 W/kg BACK/LTE B26/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 11.09 V/m; Power Drift = -0.13 dB Peak SAR (extrapolated) = 0.524 W/kg SAR(1 g) = 0.297 W/kg; SAR(10 g) = 0.169 W/kg Maximum value of SAR (measured) = 0.370 W/kg	

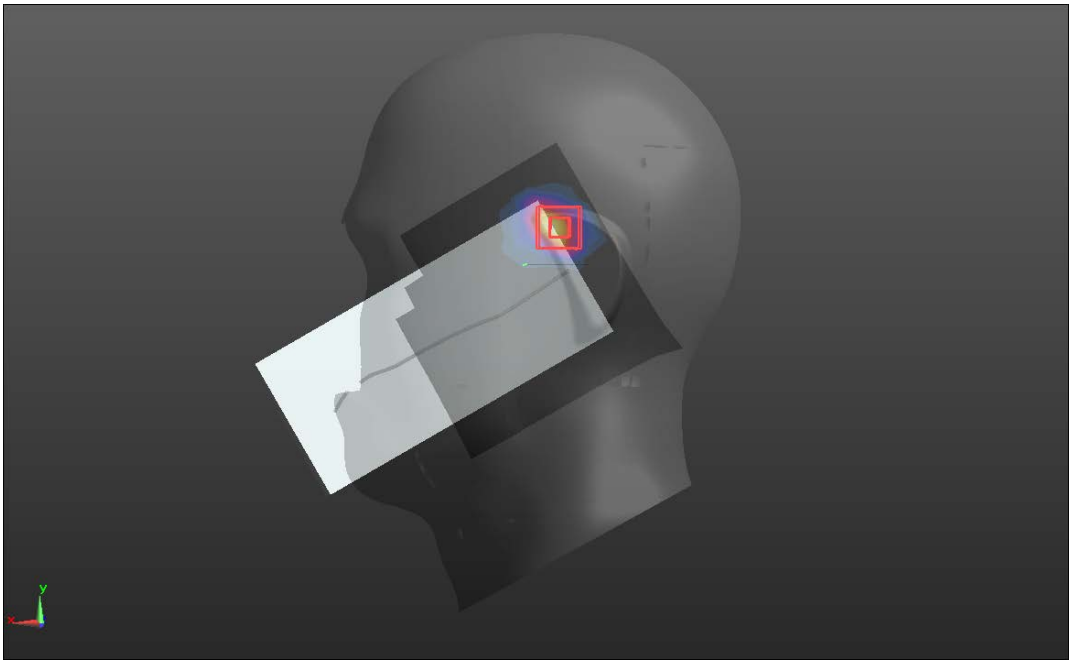


WIFI 2.4GHz

Head	Left cheek
Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2437 MHz;Duty Cycle: 0.9997:1 Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.788$ S/m; $\epsilon_r = 39.219$; $\rho = 1000$ kg/m³ Phantom section: Left Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.5, 4.5, 4.5); Calibrated: 2021/8/27; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2021/8/25 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) LT/WIFI2.4 TX15/Area Scan (10x10x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.784 W/kg LT/WIFI2.4 TX15/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 23.95 V/m; Power Drift = -0.08 dB Peak SAR (extrapolated) = 1.73 W/kg SAR(1 g) = 0.733 W/kg; SAR(10 g) = 0.301 W/kg Maximum value of SAR (measured) = 1.02 W/kg	



Bluetooth

Head	Left cheek
Communication System: UID 0, BT (0); Frequency: 2441 MHz;Duty Cycle: 0.92:1 Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.792$ S/m; $\epsilon_r = 39.213$; $\rho = 1000$ kg/m³ Phantom section: Left Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.5, 4.5, 4.5); Calibrated: 2021/8/27; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2021/8/25 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) LT/BT/Area Scan (11x11x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.112 W/kg LT/BT/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 2.123 V/m; Power Drift = -0.17 dB Peak SAR (extrapolated) = 0.209 W/kg SAR(1 g) = 0.087 W/kg; SAR(10 g) = 0.034 W/kg Maximum value of SAR (measured) = 0.119 W/kg 	

Note: All the modulated signal with different PAR (refers to RF WWAN report) already take into account, but not mentioned in this inherent log file template.