

Appendix B:SAR Measurement results Plots

Table of contents
2.4G WiFi Ant1
2.4G WiFi Ant2
5.2G WiFi Ant1
5.2G WiFi Ant2
5.8G WiFi Ant1
5.8G WiFi Ant2

Test Laboratory: CTI SAR Lab

WiFi 802.11b 6CH Left Side 0mm Ant1

DUT: ADVANCED DIAGNOSTICIS & ANALYSIS SYSTEM; Type: NA; Serial: NA

Communication System: UID 0, WiFi 802.11 a/b/g/n/ac (0); Communication System Band: WiFi; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.734$ S/m; $\epsilon_r = 37.769$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(7.56, 7.56, 7.56); Calibrated: 2/27/2022;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1458; Calibrated: 1/4/2022
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: 2024
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x8x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.956 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 14.34 V/m; Power Drift = -0.34 dB

Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.576 W/kg; SAR(10 g) = 0.266 W/kg

Maximum value of SAR (measured) = 0.964 W/kg

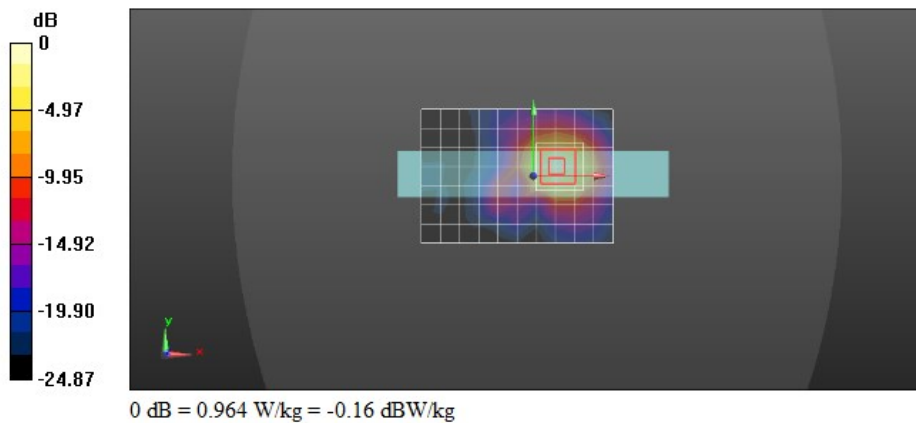

Test Laboratory: CTI SAR Lab

WiFi 802.11b 11CH Right Side 0mm Ant2

DUT: ADVANCED DIAGNOSTICIS & ANALYSIS SYSTEM; Type: NA; Serial: NA

Communication System: UID 0, WiFi 802.11 a/b/g/n/ac (0); Communication System Band: WiFi; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.773$ S/m; $\epsilon_r = 37.677$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(7.56, 7.56, 7.56); Calibrated: 2/27/2022;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1458; Calibrated: 1/4/2022
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: 2024
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x8x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.02 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 15.57 V/m; Power Drift = -0.23 dB

Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.607 W/kg; SAR(10 g) = 0.286 W/kg

Maximum value of SAR (measured) = 1.01 W/kg

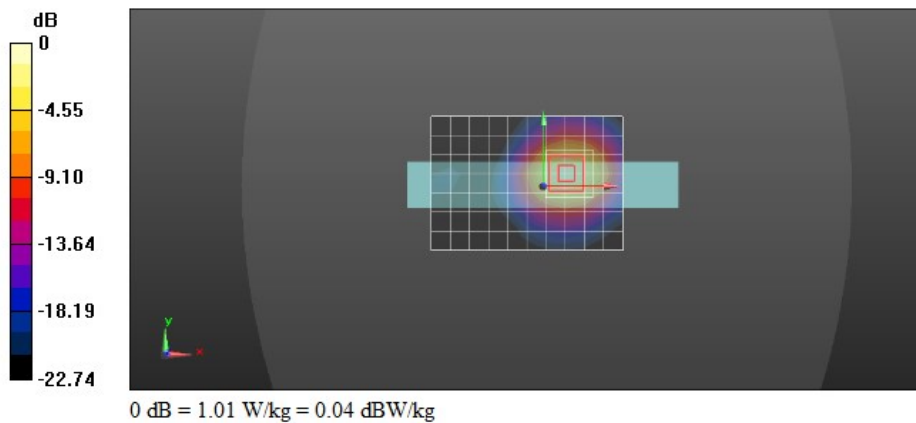

Test Laboratory: CTI SAR Lab

WiFi 802.11a 40CH Back Side 0mm Ant2

DUT: ADVANCED DIAGNOSTICIS & ANALYSIS SYSTEM; Type: NA; Serial: NA

Communication System: UID 0, WiFi 802.11 a/b/g/n/ac (0); Communication System Band: WiFi 5.2G; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.547$ S/m; $\epsilon_r = 36.059$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(5.48, 5.48, 5.48); Calibrated: 2/27/2022;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1458; Calibrated: 1/4/2022
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: 2024
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x9x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.311 W/kg


Configuration/Body/Zoom Scan (10x10x16)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 1.637 V/m; Power Drift = 1.24 dB

Peak SAR (extrapolated) = 0.579 W/kg

SAR(1 g) = 0.161 W/kg; SAR(10 g) = 0.055 W/kg

Maximum value of SAR (measured) = 0.365 W/kg

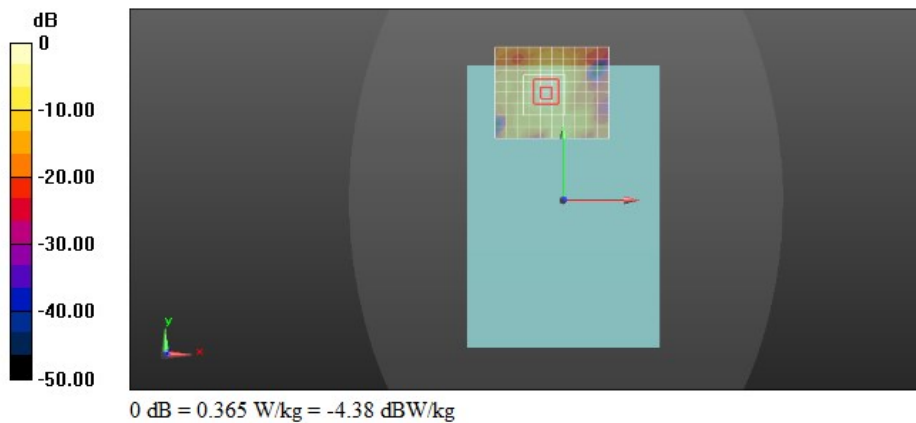

Test Laboratory: CTI SAR Lab

WiFi 802.11a 48CH Back Side 0mm Ant1

DUT: ADVANCED DIAGNOSTICIS & ANALYSIS SYSTEM; Type: NA; Serial: NA

Communication System: UID 0, WiFi 802.11 a/b/g/n/ac (0); Communication System Band: WiFi 5.2G; Frequency: 5240 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5240$ MHz; $\sigma = 4.622$ S/m; $\epsilon_r = 36.063$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(5.48, 5.48, 5.48); Calibrated: 2/27/2022;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1458; Calibrated: 1/4/2022
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: 2024
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (12x9x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.613 W/kg


Configuration/Body/Zoom Scan (10x10x16)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.271 W/kg; SAR(10 g) = 0.091 W/kg

Maximum value of SAR (measured) = 0.610 W/kg

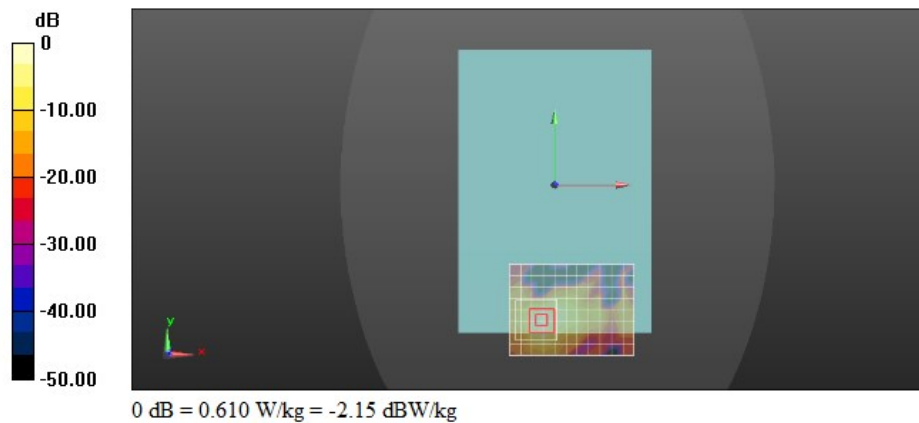

Test Laboratory: CTI SAR Lab

WiFi 802.11a 157CH Back Side 0mm Ant1

DUT: ADVANCED DIAGNOSTICIS & ANALYSIS SYSTEM; Type: NA; Serial: NA

Communication System: UID 0, WiFi 802.11 a/b/g/n/ac (0); Communication System Band: WiFi 5.8G; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5785$ MHz; $\sigma = 5.331$ S/m; $\epsilon_r = 36.129$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(4.95, 4.95, 4.95); Calibrated: 2/27/2022;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1458; Calibrated: 1/4/2022
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: 2024
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (12x9x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.735 W/kg


Configuration/Body/Zoom Scan (10x10x16)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 2.544 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.356 W/kg; SAR(10 g) = 0.154 W/kg

Maximum value of SAR (measured) = 0.790 W/kg

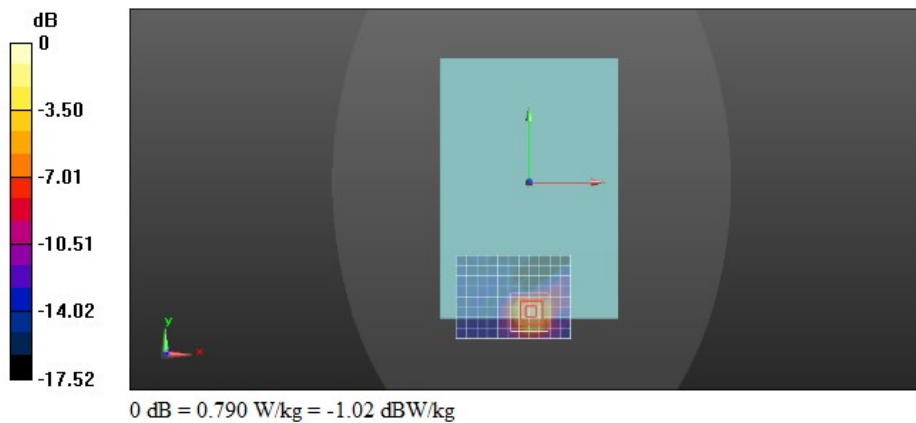

Test Laboratory: CTI SAR Lab

WiFi 802.11a 165CH Front Side 0mm Ant2

DUT: ADVANCED DIAGNOSTICIS & ANALYSIS SYSTEM; Type: NA; Serial: NA

Communication System: UID 0, WiFi 802.11 a/b/g/n/ac (0); Communication System Band: WiFi 5.8G; Frequency: 5825 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5825$ MHz; $\sigma = 5.374$ S/m; $\epsilon_r = 36.58$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(4.95, 4.95, 4.95); Calibrated: 2/27/2022;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1458; Calibrated: 1/4/2022
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: 2024
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x9x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.825 W/kg

Configuration/Body/Zoom Scan (10x10x16)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.55 W/kg

SAR(1 g) = 0.377 W/kg; SAR(10 g) = 0.122 W/kg

Maximum value of SAR (measured) = 0.926 W/kg

