


Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz

Vertical


80 dBuV/m

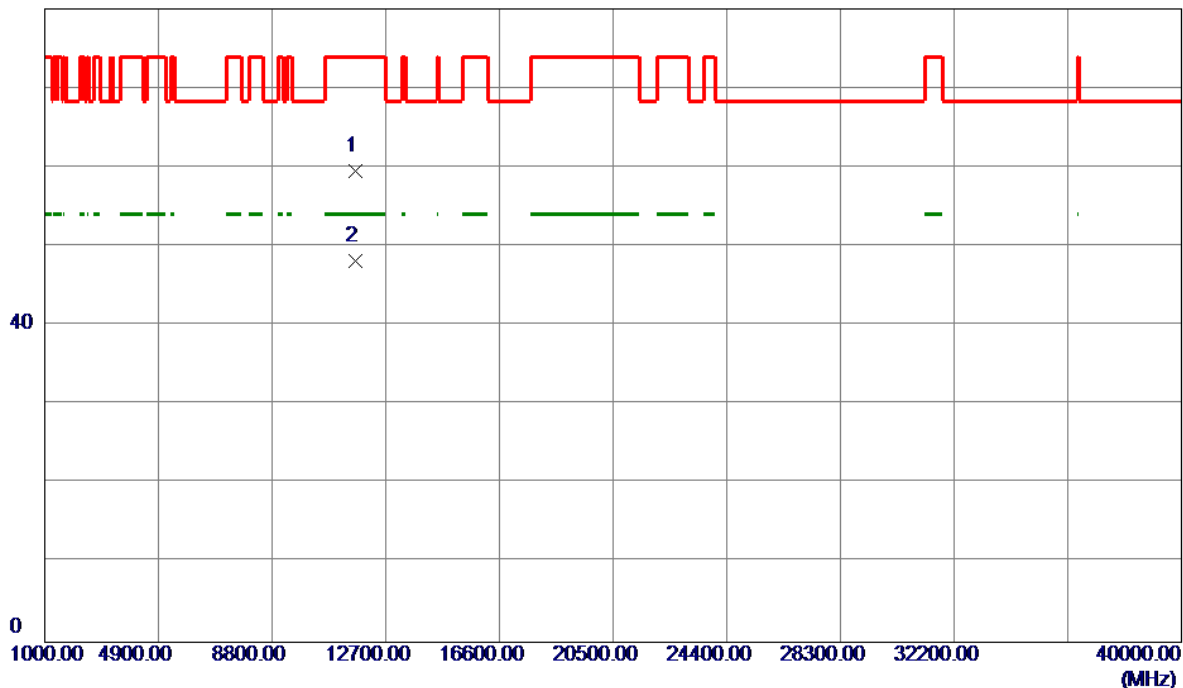

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11648.6000	41.73	17.86	59.59	74.00	-14.41	Peak	
2 *	11652.6500	30.36	17.86	48.22	54.00	-5.78	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz

Horizontal

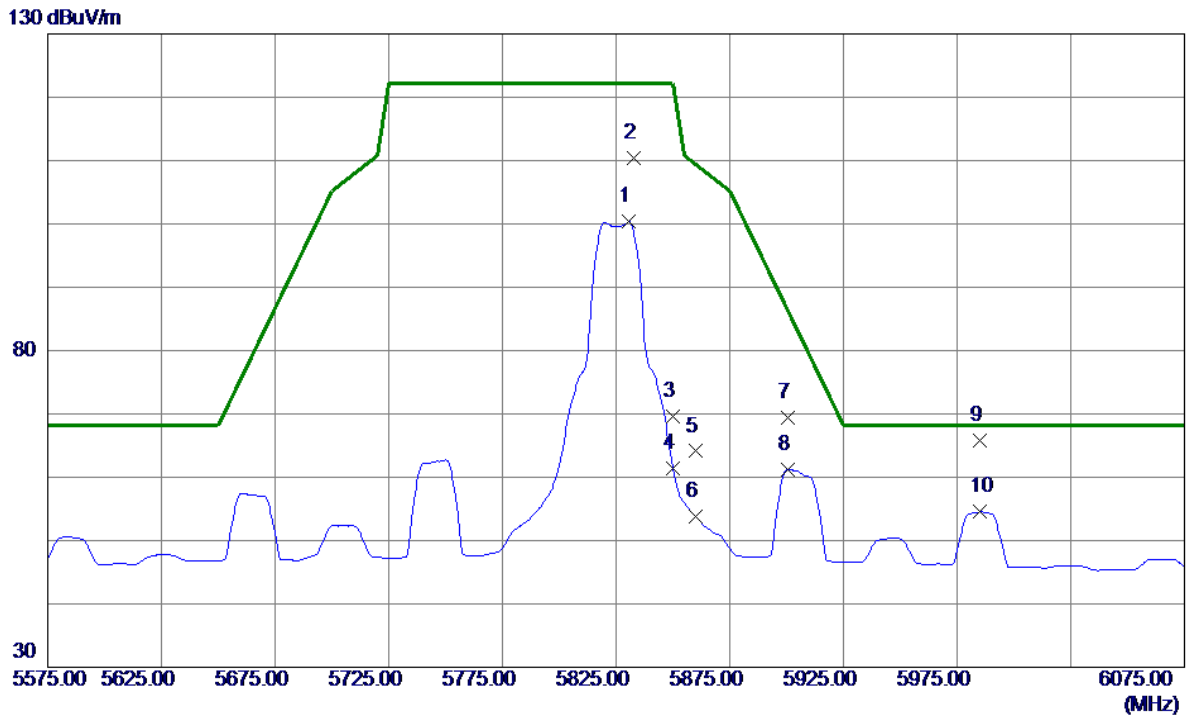


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5830.5000	56.45	43.88	100.33	122.20	-21.87	AVG	
2	5833.0000	66.52	43.89	110.41	122.20	-11.79	Peak	
3	5850.0000	25.63	43.94	69.57	122.20	-52.63	Peak	
4	5850.0000	17.50	43.94	61.44	122.20	-60.76	AVG	
5	5860.0000	20.13	43.97	64.10	109.40	-45.30	Peak	
6	5860.0000	9.78	43.97	53.75	109.40	-55.65	AVG	
7	5900.5000	25.36	44.09	69.45	86.33	-16.88	Peak	
8	5900.5000	17.16	44.09	61.25	86.33	-25.08	AVG	
9 *	5985.0000	21.50	44.34	65.84	68.20	-2.36	Peak	
10	5985.0000	10.18	44.34	54.52	68.20	-13.68	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz

Horizontal


80 dBuV/m

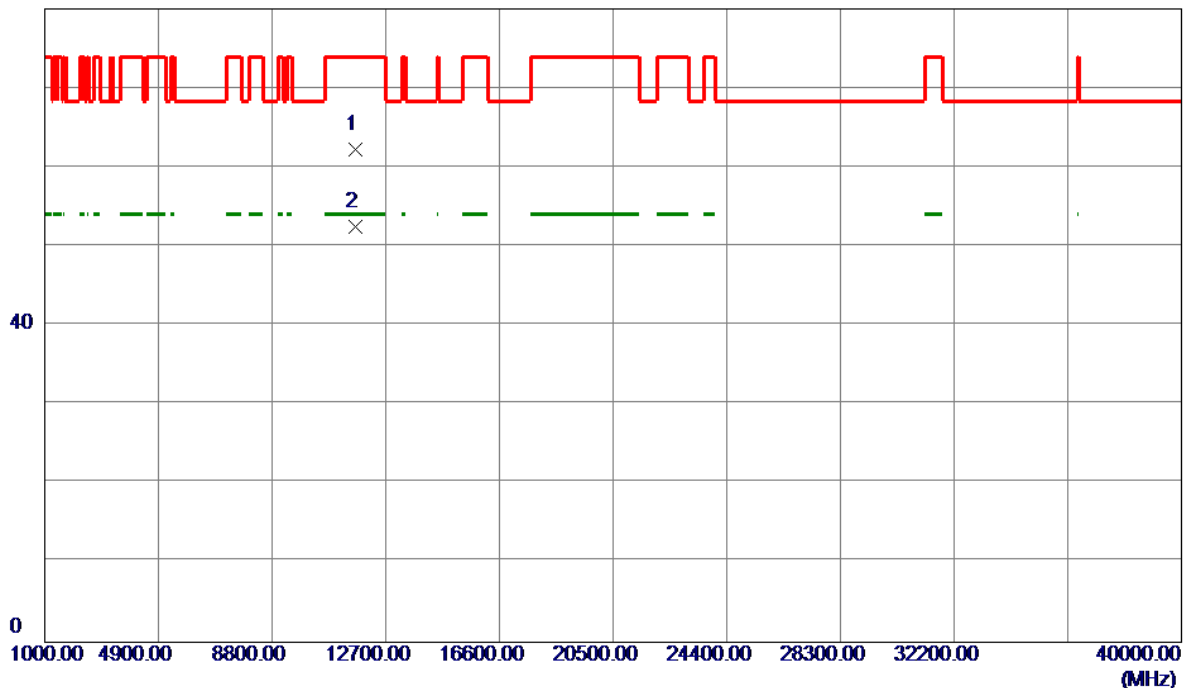

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11652.6000	44.37	17.86	62.23	74.00	-11.77	Peak	
2 *	11652.6500	34.58	17.86	52.44	54.00	-1.56	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz

Vertical

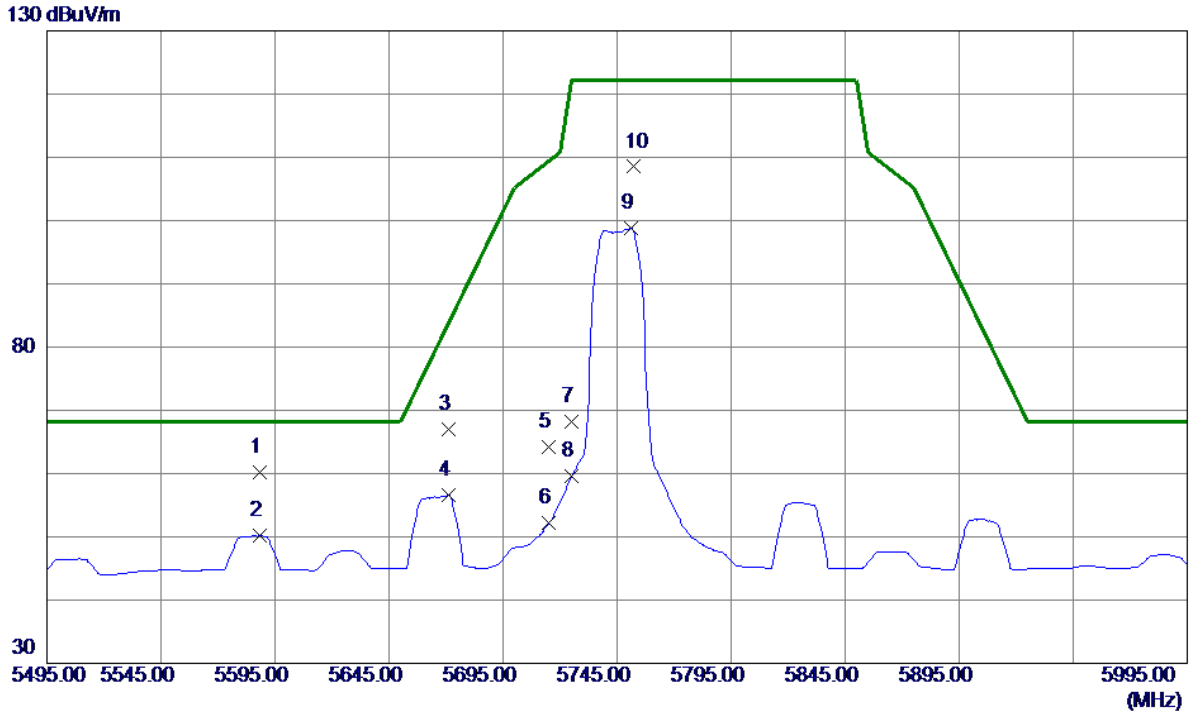


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5588.5000	16.98	43.15	60.13	68.20	-8.07	Peak	
2	5588.5000	6.99	43.15	50.14	68.20	-18.06	AVG	
3	5671.0000	23.66	43.40	67.06	83.74	-16.68	Peak	
4	5671.0000	13.13	43.40	56.53	83.74	-27.21	AVG	
5	5715.0000	20.68	43.53	64.21	109.40	-45.19	Peak	
6	5715.0000	8.60	43.53	52.13	109.40	-57.27	AVG	
7	5725.0000	24.56	43.56	68.12	122.20	-54.08	Peak	
8	5725.0000	16.01	43.56	59.57	122.20	-62.63	AVG	
9	5751.0000	55.18	43.64	98.82	122.20	-23.38	AVG	
10	5752.5000	64.86	43.64	108.50	122.20	-13.70	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz

Vertical


80 dBuV/m

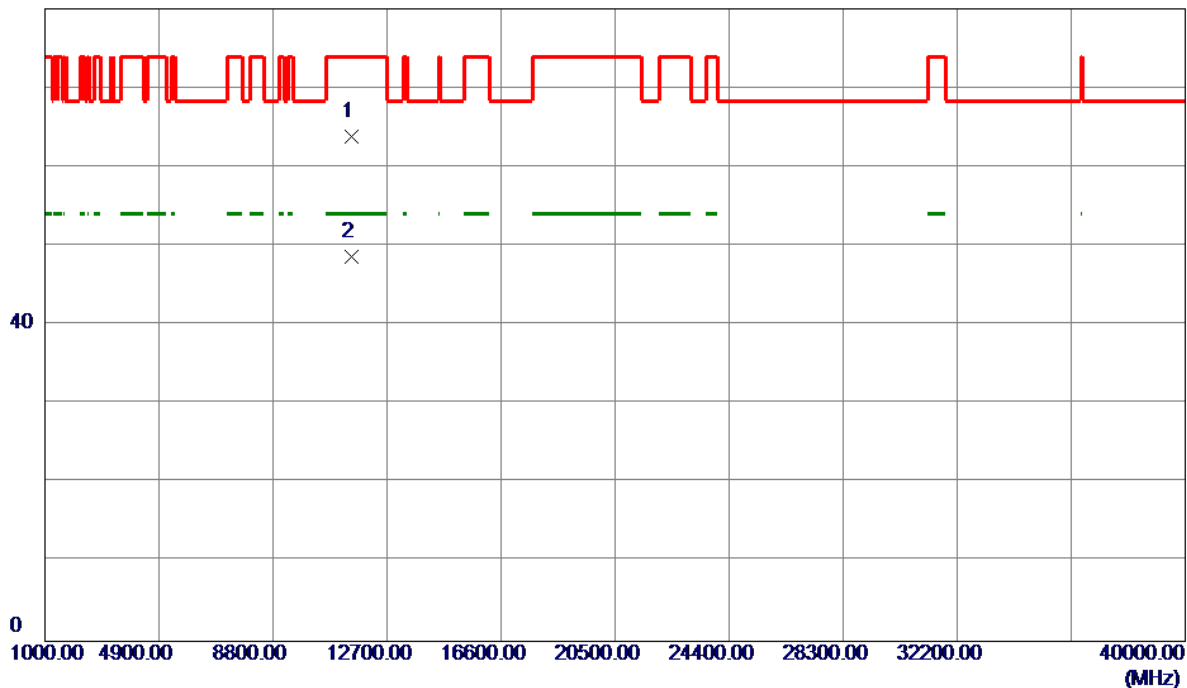

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11488.5500	46.11	17.74	63.85	74.00	-10.15	Peak	
2 *	11488.5500	30.89	17.74	48.63	54.00	-5.37	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz

Horizontal

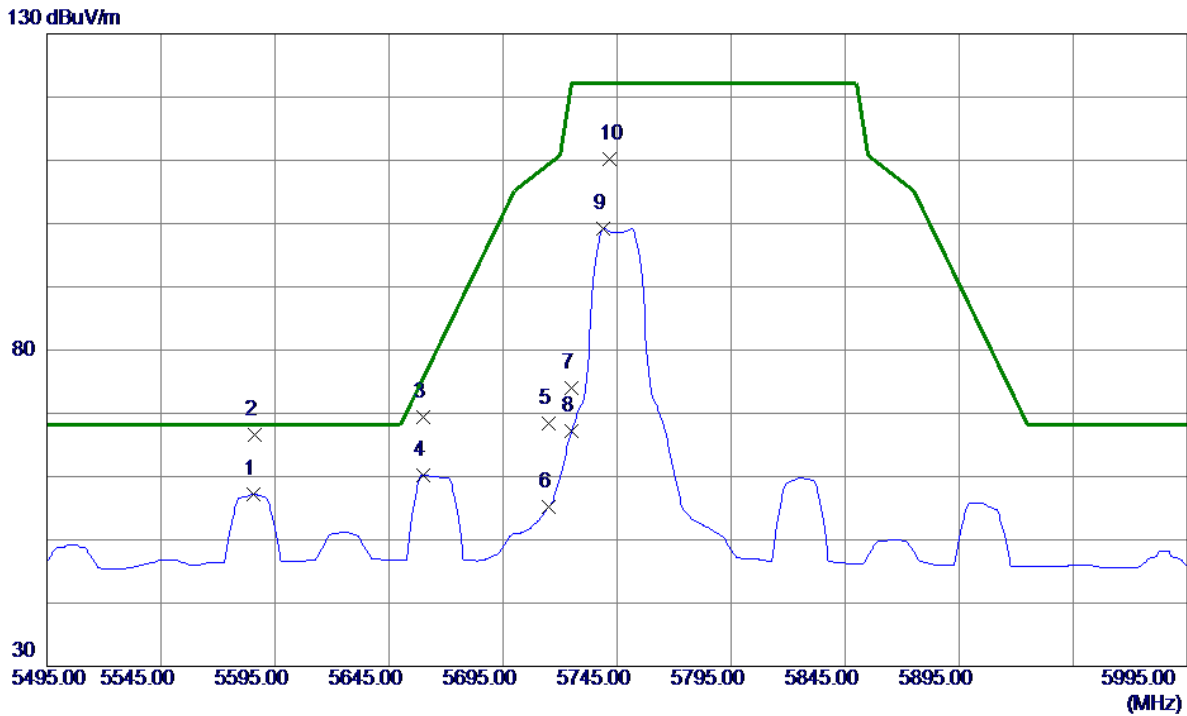


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5585.5000	14.06	43.14	57.20	68.20	-11.00	AVG	
2 *	5586.0000	23.44	43.14	66.58	68.20	-1.62	Peak	
3	5660.0000	26.03	43.36	69.39	75.60	-6.21	Peak	
4	5660.0000	16.81	43.36	60.17	75.60	-15.43	AVG	
5	5715.0000	24.78	43.53	68.31	109.40	-41.09	Peak	
6	5715.0000	11.71	43.53	55.24	109.40	-54.16	AVG	
7	5725.0000	30.46	43.56	74.02	122.20	-48.18	Peak	
8	5725.0000	23.68	43.56	67.24	122.20	-54.96	AVG	
9	5739.0000	55.63	43.60	99.23	122.20	-22.97	AVG	
10	5741.5000	66.57	43.61	110.18	122.20	-12.02	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz

Horizontal


80 dBuV/m

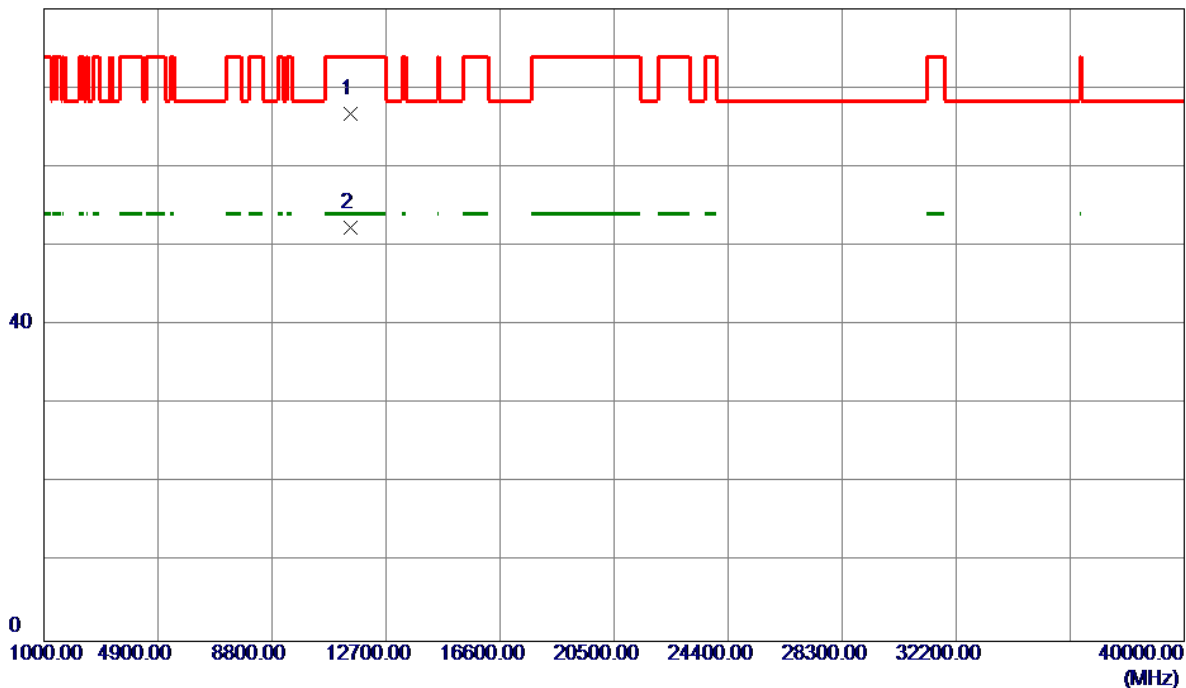

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11488.6000	49.06	17.74	66.80	74.00	-7.20	Peak	
2 *	11488.7500	34.55	17.75	52.30	54.00	-1.70	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz

Vertical

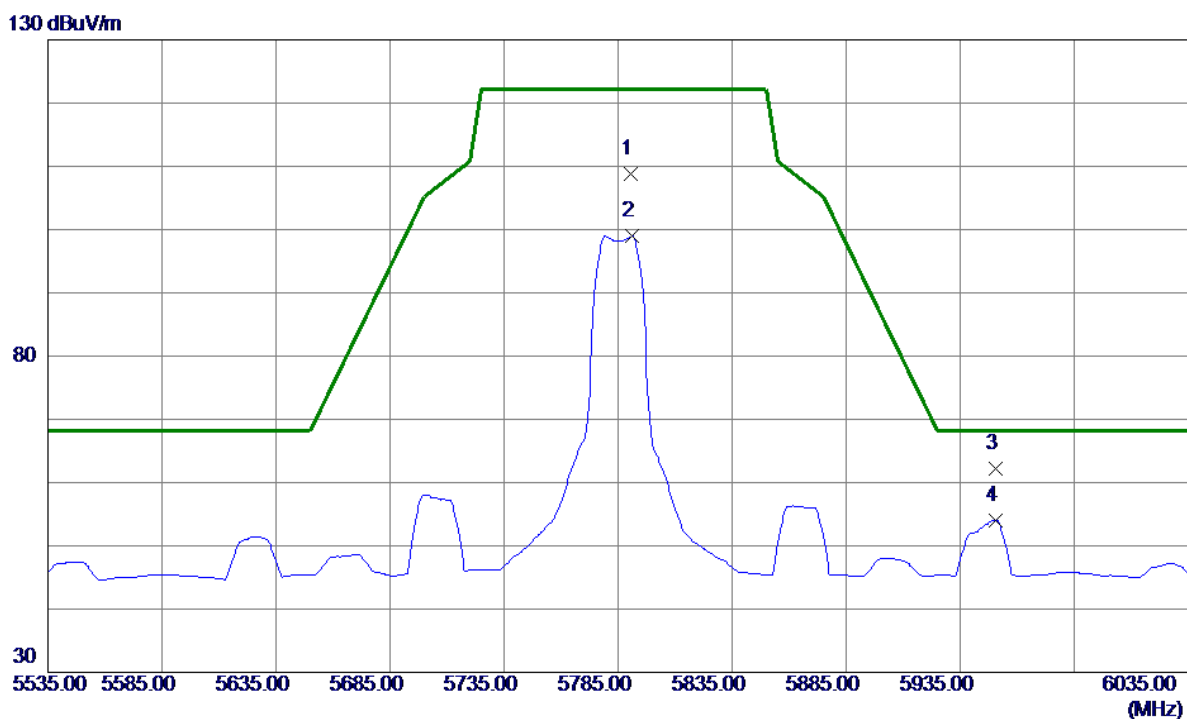


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5790.5000	64.98	43.76	108.74	122.20	-13.46	Peak	
2	5791.0000	55.15	43.76	98.91	122.20	-23.29	AVG	
3 *	5950.5000	17.92	44.24	62.16	68.20	-6.04	Peak	
4	5950.5000	9.74	44.24	53.98	68.20	-14.22	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz

Vertical


80 dBuV/m

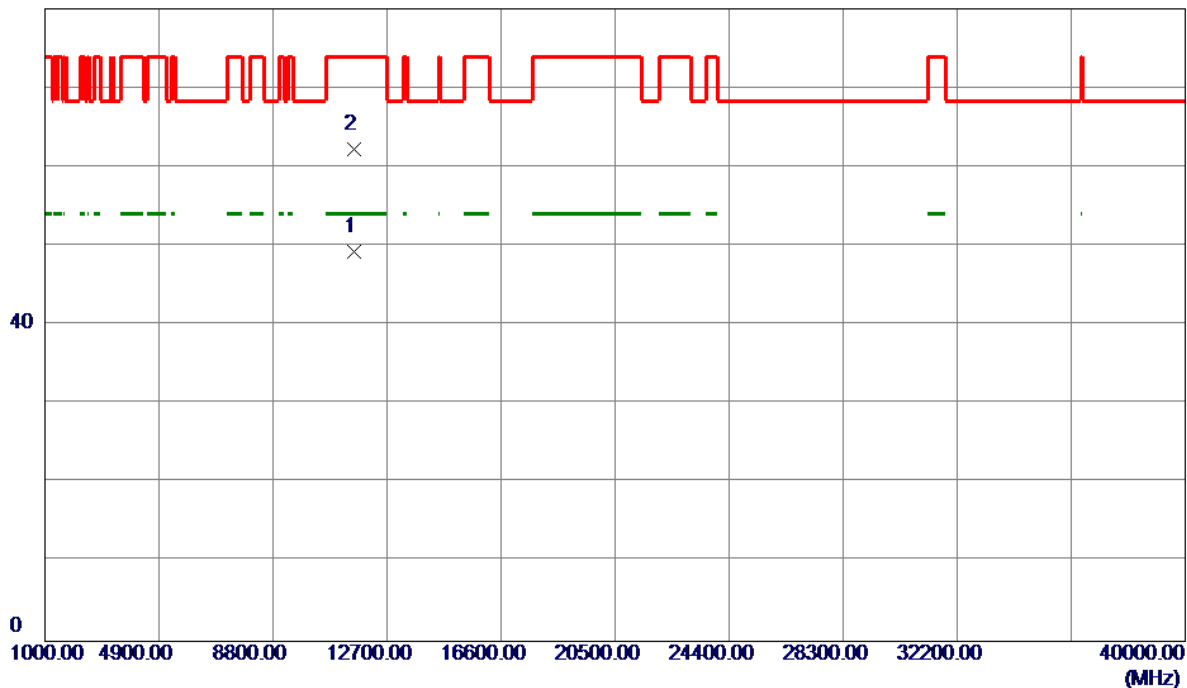

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11569.6000	31.44	17.82	49.26	54.00	-4.74	AVG	
2	11578.8500	44.47	17.82	62.29	74.00	-11.71	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz


Horizontal

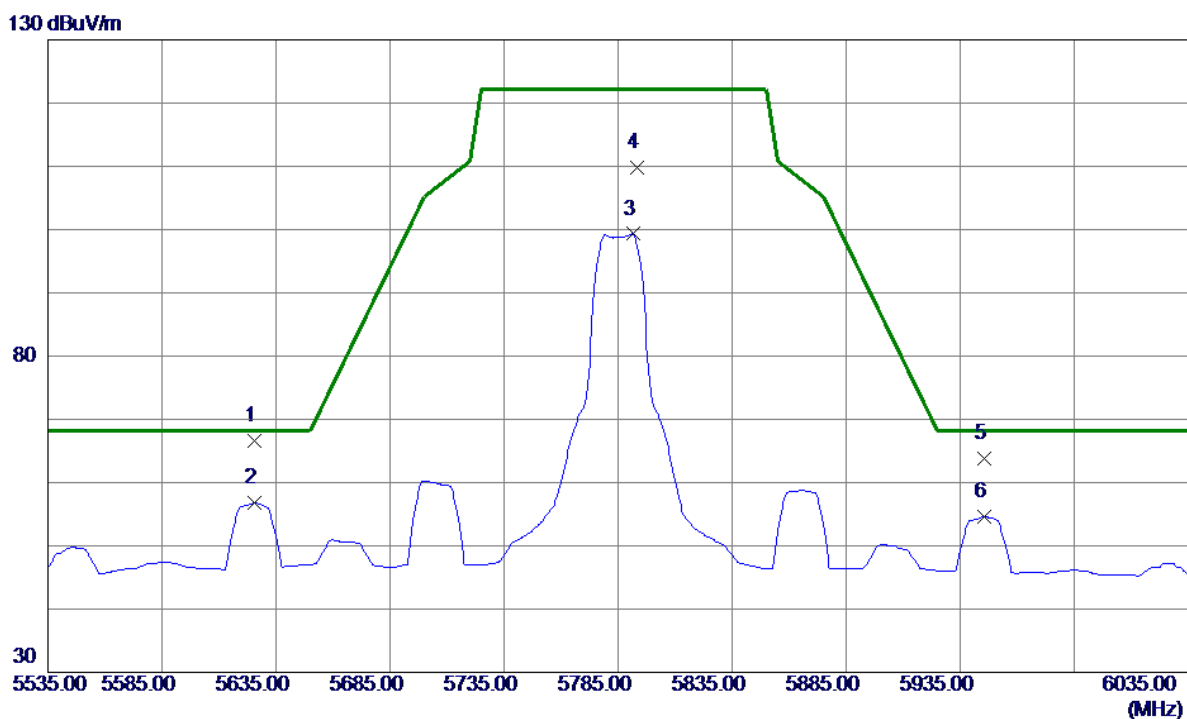

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5625.5000	23.34	43.26	66.60	68.20	-1.60	Peak	
2	5625.5000	13.48	43.26	56.74	68.20	-11.46	AVG	
3	5791.5000	55.54	43.76	99.30	122.20	-22.90	AVG	
4	5793.5000	66.09	43.77	109.86	122.20	-12.34	Peak	
5	5945.5000	19.54	44.23	63.77	68.20	-4.43	Peak	
6	5945.5000	10.37	44.23	54.60	68.20	-13.60	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz


Horizontal

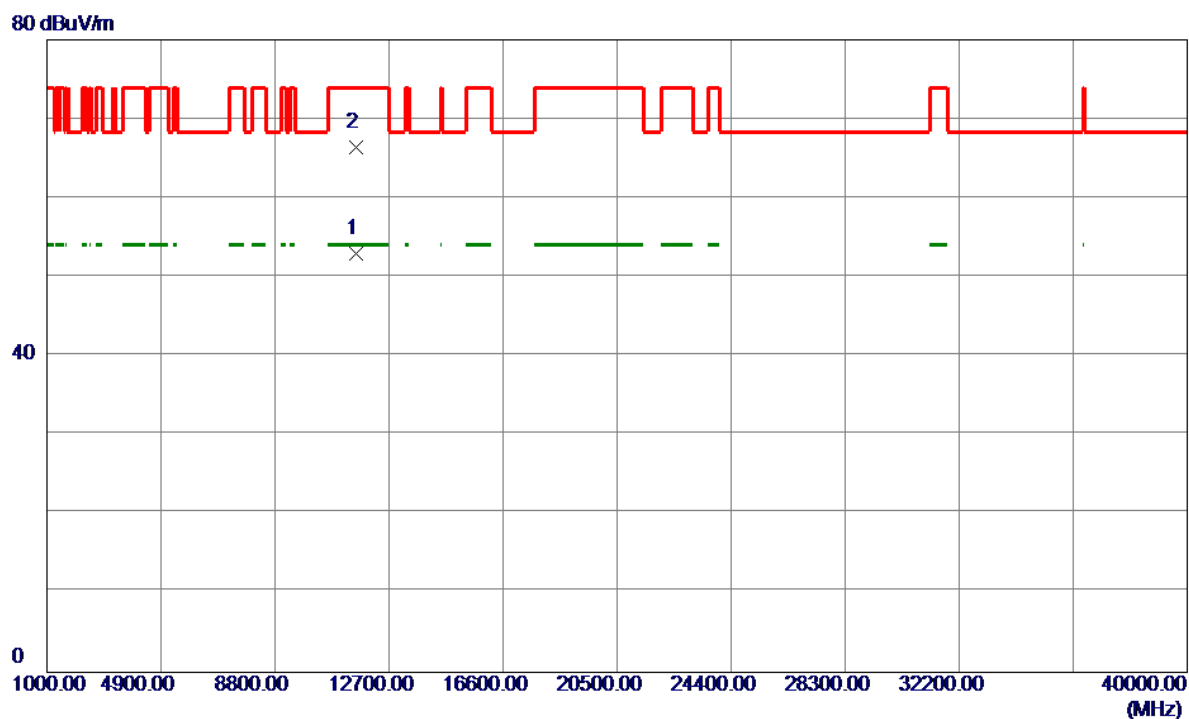

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11570.0500	35.10	17.82	52.92	54.00	-1.08	AVG	
2	11578.7500	48.54	17.82	66.36	74.00	-7.64	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz

Vertical

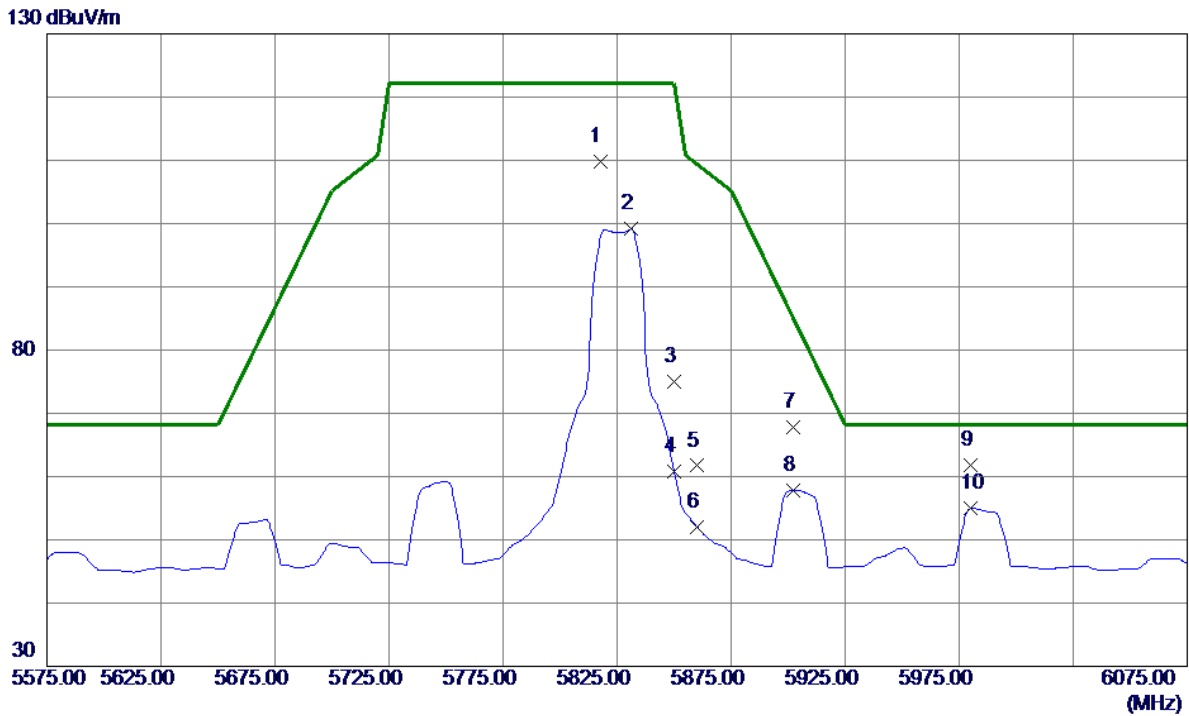


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5817.5000	65.94	43.84	109.78	122.20	-12.42	Peak	
2	5831.0000	55.24	43.88	99.12	122.20	-23.08	AVG	
3	5850.0000	31.05	43.94	74.99	122.20	-47.21	Peak	
4	5850.0000	16.84	43.94	60.78	122.20	-61.42	AVG	
5	5860.0000	17.73	43.97	61.70	109.40	-47.70	Peak	
6	5860.0000	8.11	43.97	52.08	109.40	-57.32	AVG	
7	5902.0000	23.78	44.09	67.87	85.22	-17.35	Peak	
8	5902.0000	13.77	44.09	57.86	85.22	-27.36	AVG	
9 *	5980.0000	17.47	44.33	61.80	68.20	-6.40	Peak	
10	5980.0000	10.58	44.33	54.91	68.20	-13.29	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz

Vertical


80 dBuV/m

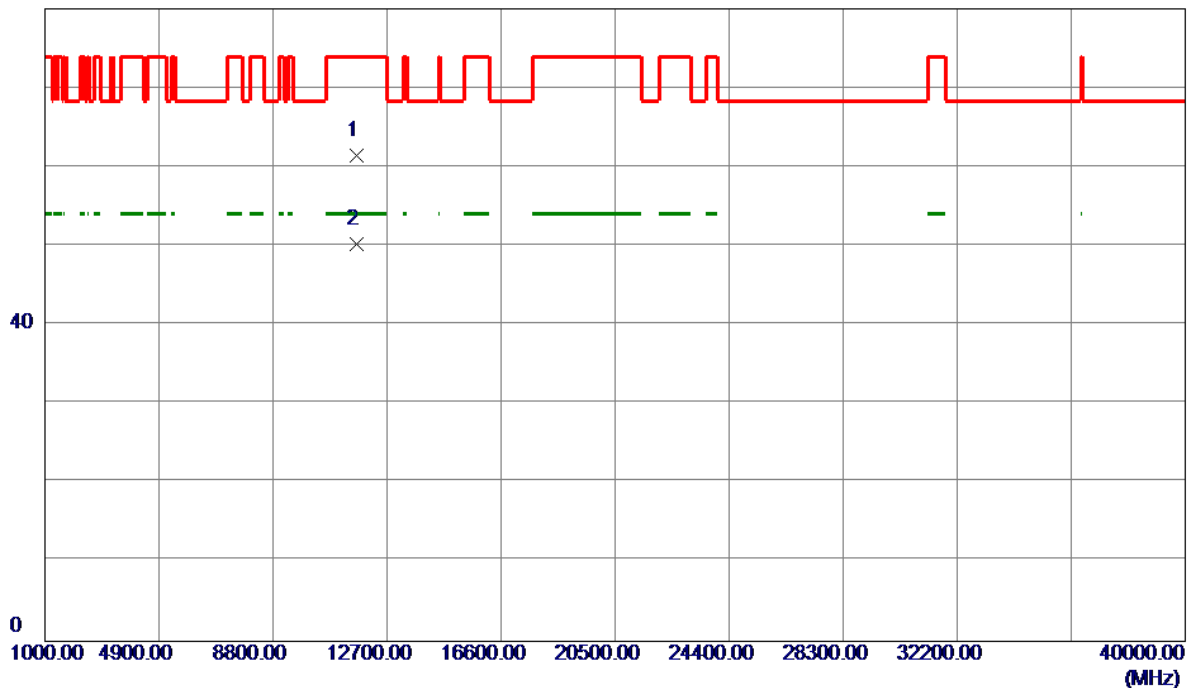

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11638.6000	43.60	17.85	61.45	74.00	-12.55	Peak	
2 *	11651.1500	32.45	17.86	50.31	54.00	-3.69	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz

Horizontal

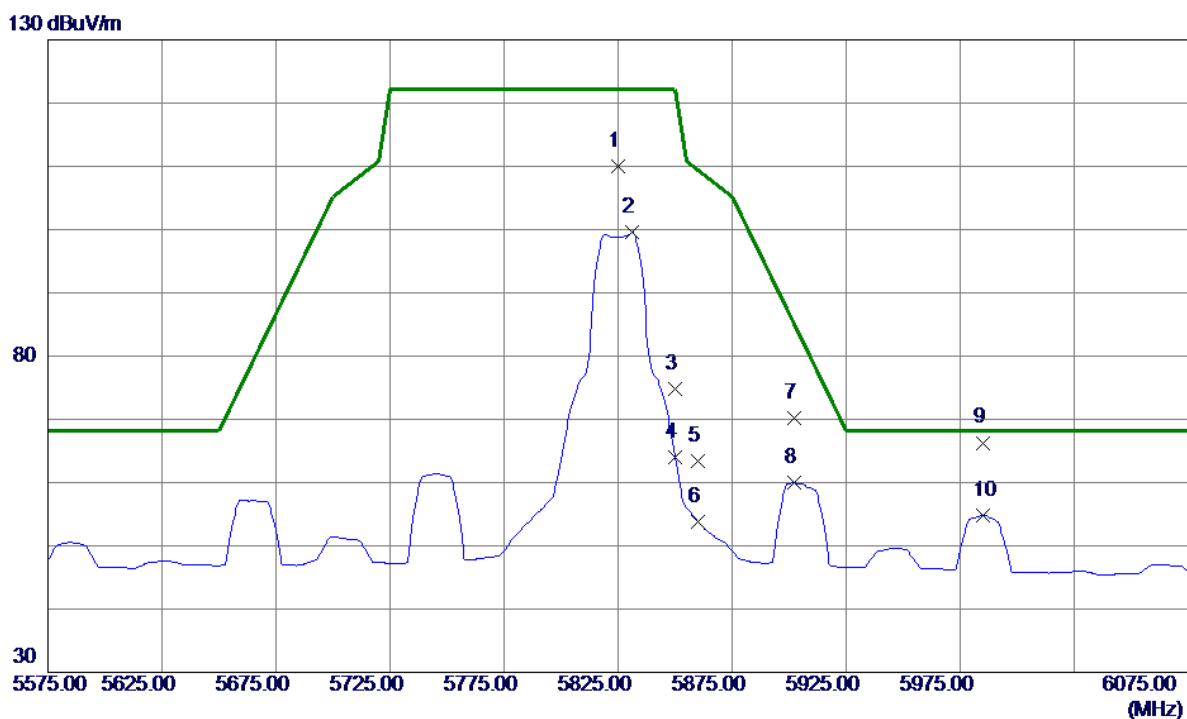


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5825.0000	66.21	43.86	110.07	122.20	-12.13	Peak	
2	5831.0000	55.63	43.88	99.51	122.20	-22.69	AVG	
3	5850.0000	30.77	43.94	74.71	122.20	-47.49	Peak	
4	5850.0000	20.10	43.94	64.04	122.20	-58.16	AVG	
5	5860.0000	19.35	43.97	63.32	109.40	-46.08	Peak	
6	5860.0000	9.89	43.97	53.86	109.40	-55.54	AVG	
7	5902.0000	26.09	44.09	70.18	85.22	-15.04	Peak	
8	5902.0000	15.86	44.09	59.95	85.22	-25.27	AVG	
9 *	5985.0000	21.96	44.34	66.30	68.20	-1.90	Peak	
10	5985.0000	10.44	44.34	54.78	68.20	-13.42	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz

Horizontal


80 dBuV/m

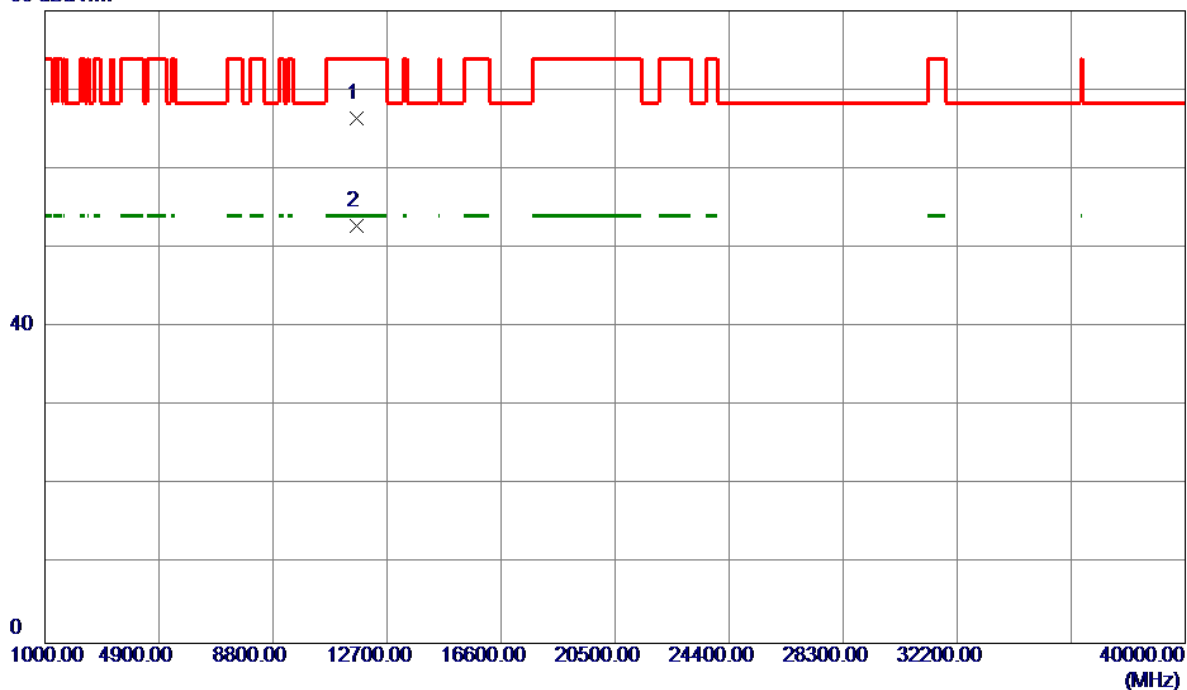

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11648.4500	48.61	17.86	66.47	74.00	-7.53	Peak	
2 *	11650.5000	34.90	17.86	52.76	54.00	-1.24	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz

Vertical

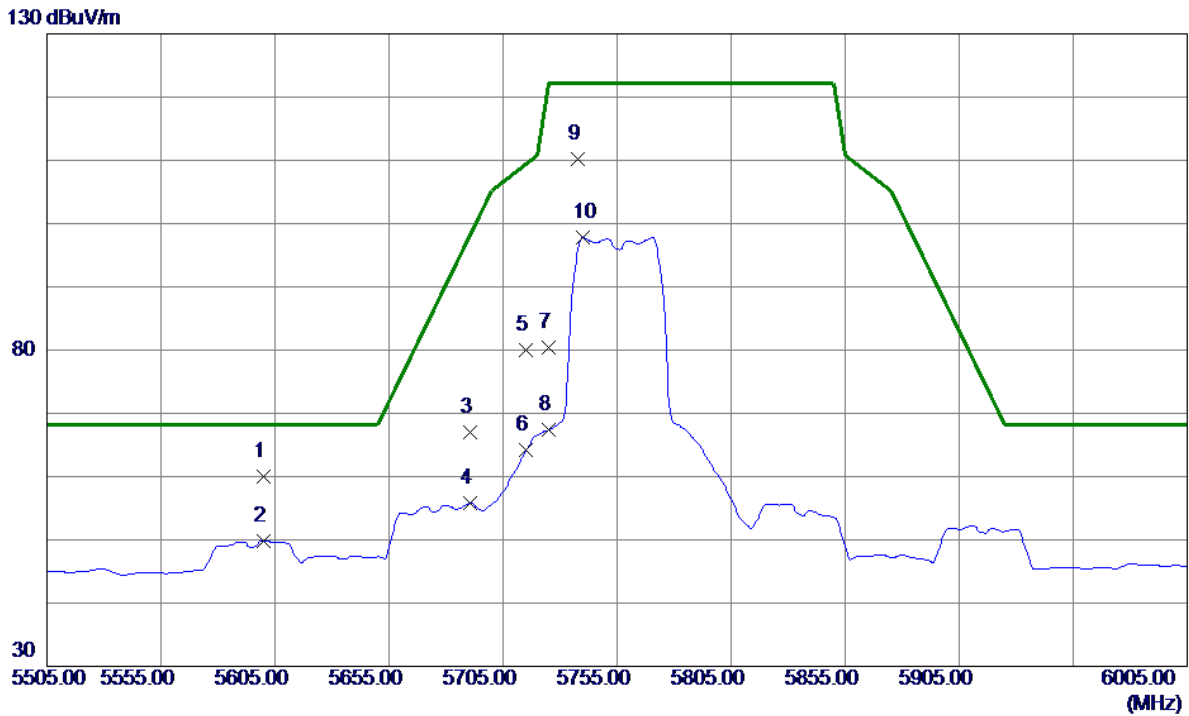


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5600.0000	16.86	43.18	60.04	68.20	-8.16	Peak	
2	5600.0000	6.66	43.18	49.84	68.20	-18.36	AVG	
3	5690.5000	23.53	43.46	66.99	98.17	-31.18	Peak	
4	5690.5000	12.42	43.46	55.88	98.17	-42.29	AVG	
5	5715.0000	36.44	43.53	79.97	109.40	-29.43	Peak	
6	5715.0000	20.61	43.53	64.14	109.40	-45.26	AVG	
7	5725.0000	36.92	43.56	80.48	122.20	-41.72	Peak	
8	5725.0000	23.81	43.56	67.37	122.20	-54.83	AVG	
9	5738.0000	66.59	43.60	110.19	122.20	-12.01	Peak	
10	5740.0000	54.25	43.60	97.85	122.20	-24.35	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz

Vertical


80 dBuV/m

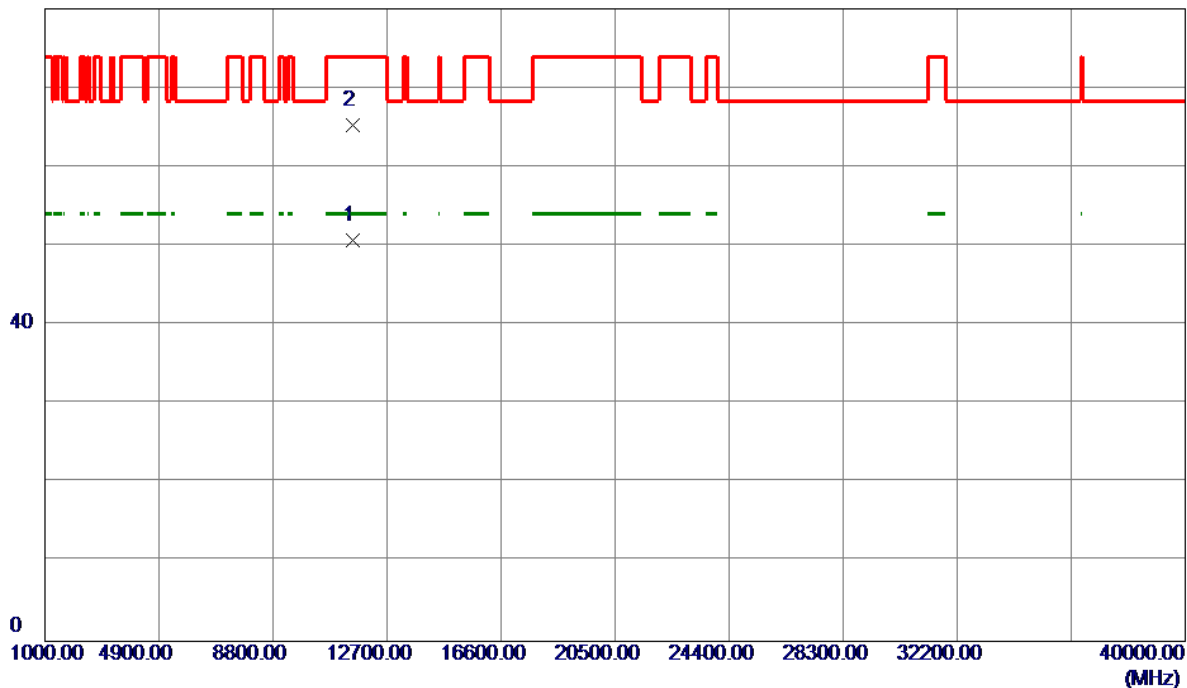

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11508.5000	32.88	17.79	50.67	54.00	-3.33	AVG	
2	11508.8000	47.49	17.79	65.28	74.00	-8.72	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz

Horizontal

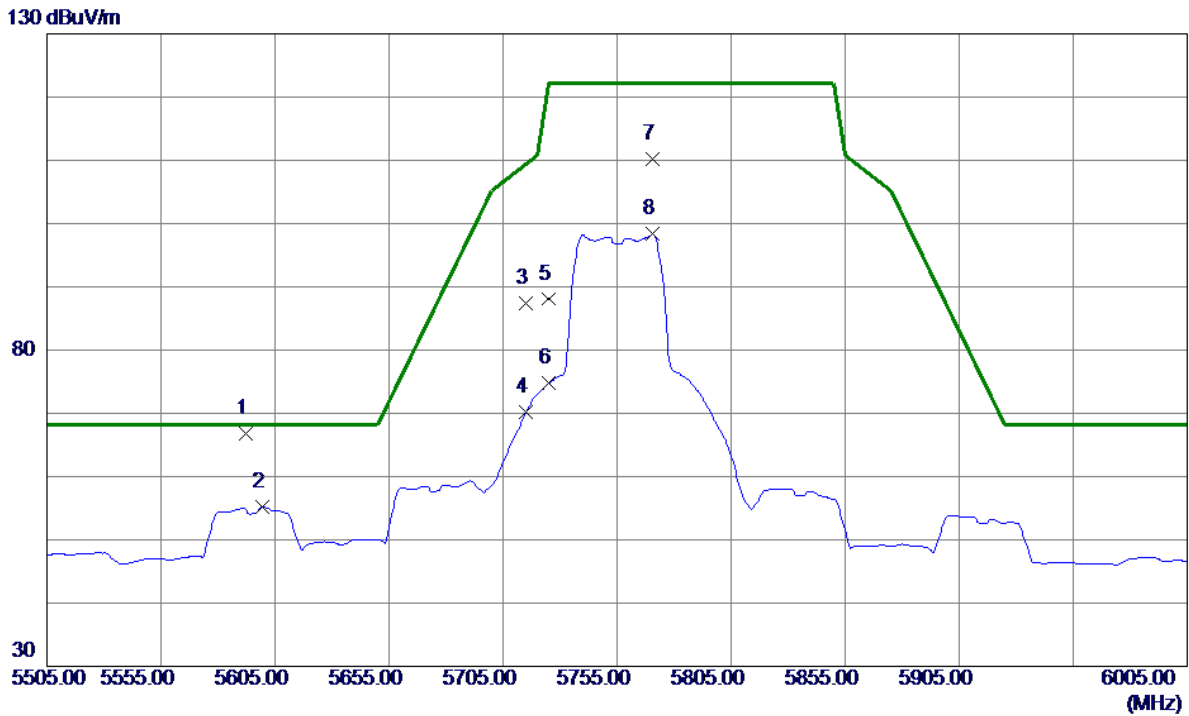


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5592.0000	23.64	43.16	66.80	68.20	-1.40	Peak	
2	5599.5000	11.98	43.18	55.16	68.20	-13.04	AVG	
3	5715.0000	43.79	43.53	87.32	109.40	-22.08	Peak	
4	5715.0000	26.68	43.53	70.21	109.40	-39.19	AVG	
5	5725.0000	44.54	43.56	88.10	122.20	-34.10	Peak	
6	5725.0000	31.18	43.56	74.74	122.20	-47.46	AVG	
7	5770.5000	66.57	43.70	110.27	122.20	-11.93	Peak	
8	5770.5000	54.61	43.70	98.31	122.20	-23.89	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz

Horizontal


80 dBuV/m

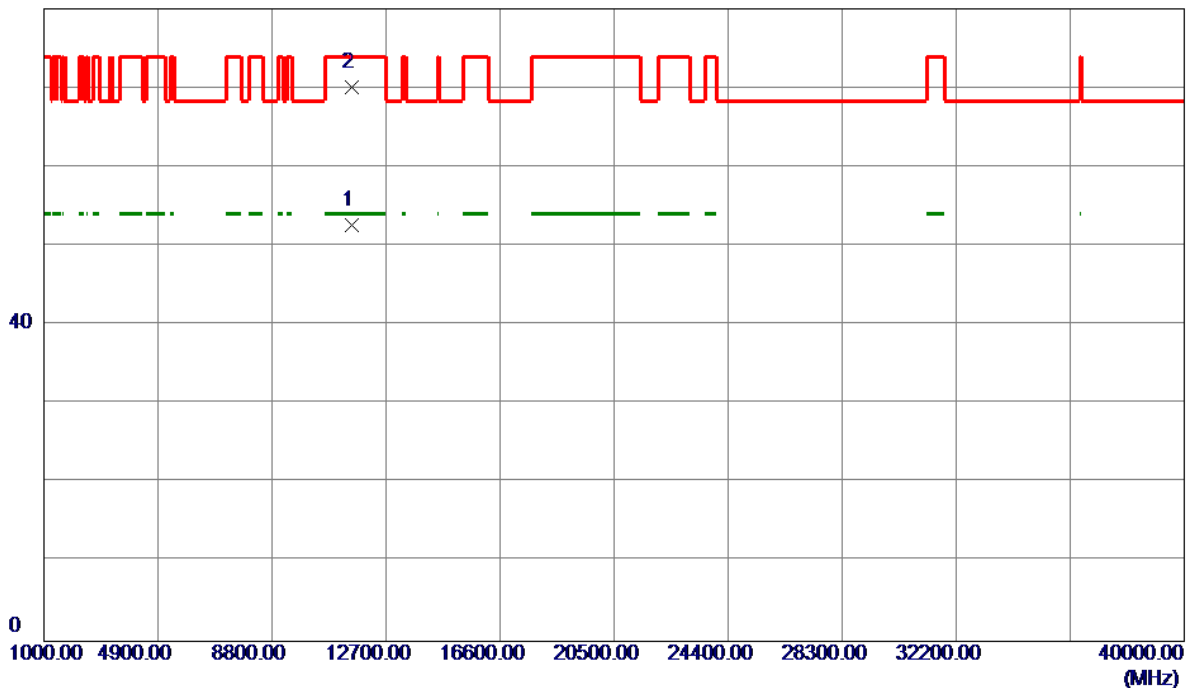

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11508.7000	34.78	17.79	52.57	54.00	-1.43	AVG	
2	11508.8000	52.23	17.79	70.02	74.00	-3.98	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz

Vertical

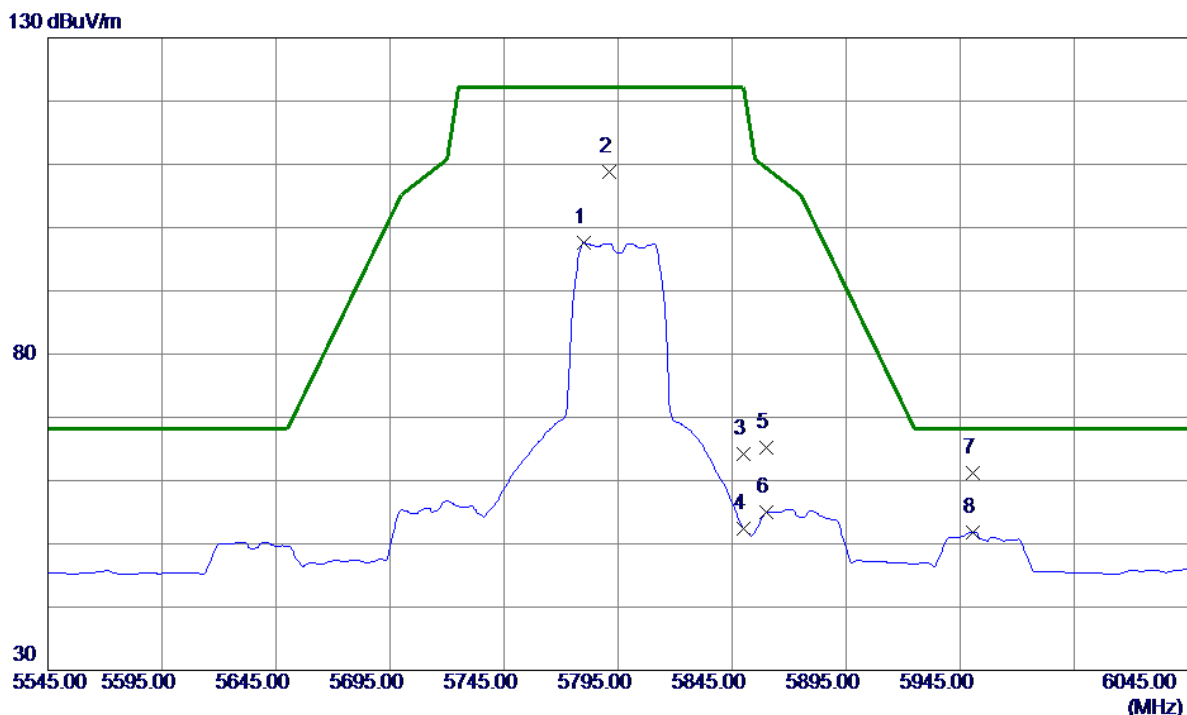


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5780.0000	53.93	43.73	97.66	122.20	-24.54	AVG	
2	5791.0000	64.99	43.76	108.75	122.20	-13.45	Peak	
3	5850.0000	20.24	43.94	64.18	122.20	-58.02	Peak	
4	5850.0000	8.50	43.94	52.44	122.20	-69.76	AVG	
5	5860.0000	21.27	43.97	65.24	109.40	-44.16	Peak	
6	5860.0000	11.05	43.97	55.02	109.40	-54.38	AVG	
7 *	5950.5000	17.04	44.24	61.28	68.20	-6.92	Peak	
8	5950.5000	7.63	44.24	51.87	68.20	-16.33	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz

Vertical


80 dBuV/m

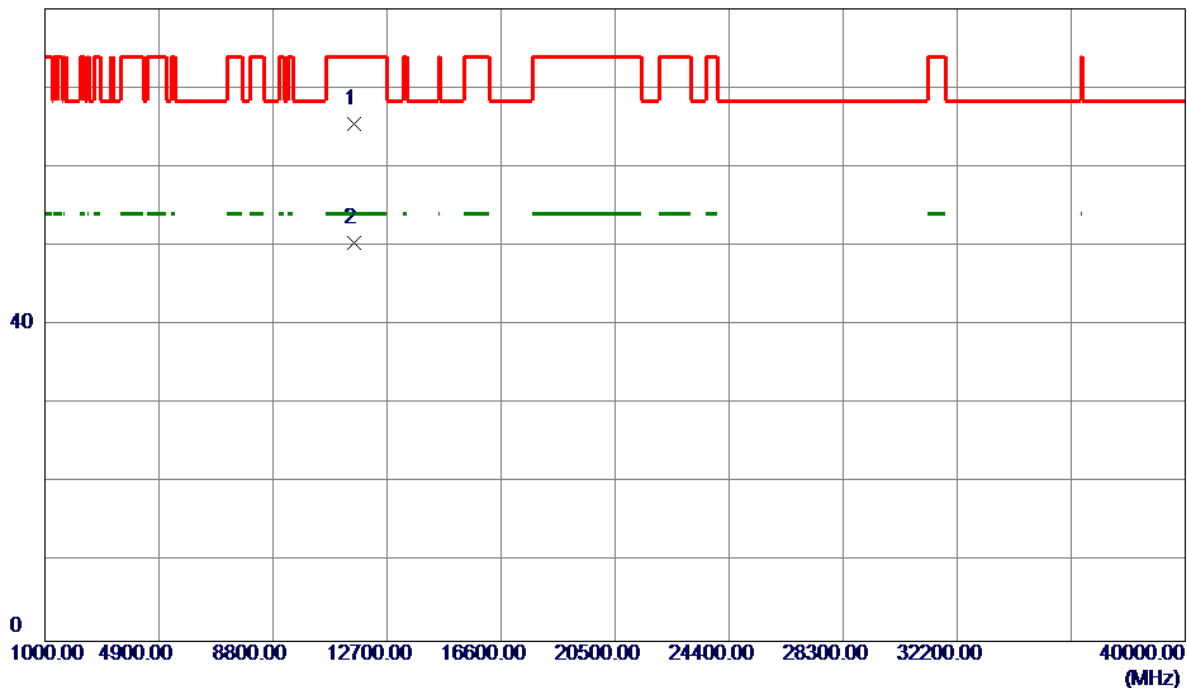

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11588.5000	47.57	17.83	65.40	74.00	-8.60	Peak	
2 *	11588.5000	32.54	17.83	50.37	54.00	-3.63	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz

Horizontal

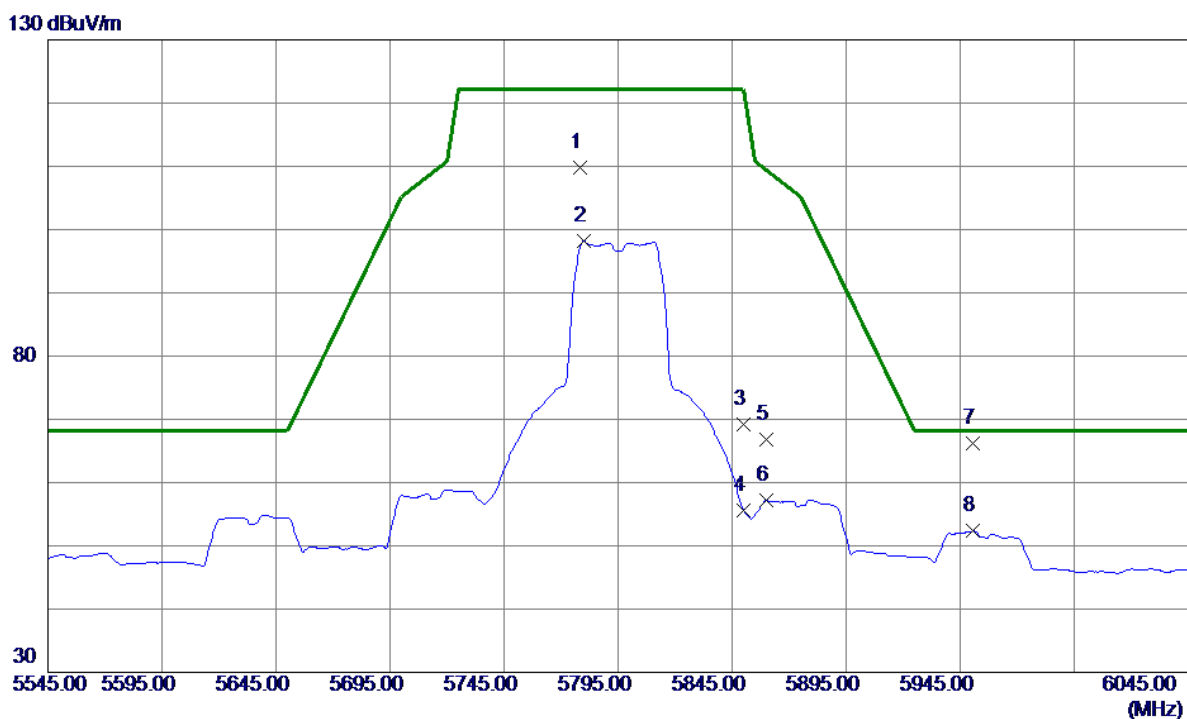


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5778.5000	66.04	43.72	109.76	122.20	-12.44	Peak	
2	5780.0000	54.46	43.73	98.19	122.20	-24.01	AVG	
3	5850.0000	25.19	43.94	69.13	122.20	-53.07	Peak	
4	5850.0000	11.72	43.94	55.66	122.20	-66.54	AVG	
5	5860.0000	22.84	43.97	66.81	109.40	-42.59	Peak	
6	5860.0000	13.24	43.97	57.21	109.40	-52.19	AVG	
7 *	5950.5000	21.98	44.24	66.22	68.20	-1.98	Peak	
8	5950.5000	8.07	44.24	52.31	68.20	-15.89	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz

Horizontal


80 dBuV/m

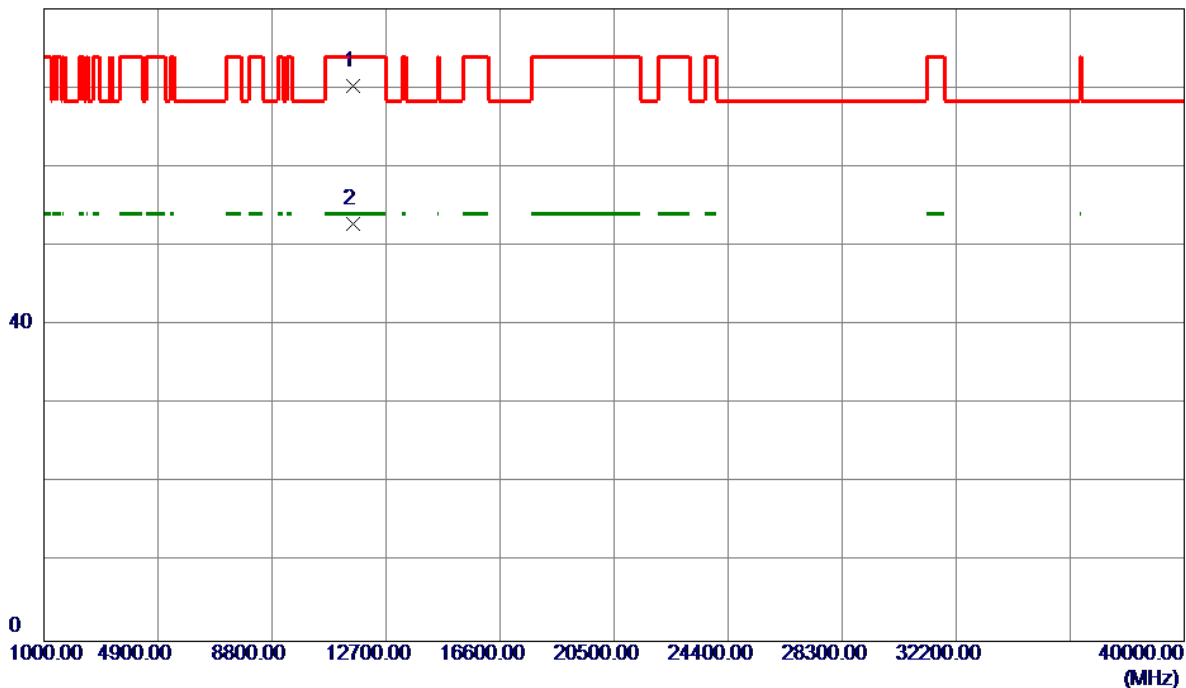

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11588.7000	52.42	17.83	70.25	74.00	-3.75	Peak	
2 *	11588.8000	34.95	17.83	52.78	54.00	-1.22	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz

Vertical

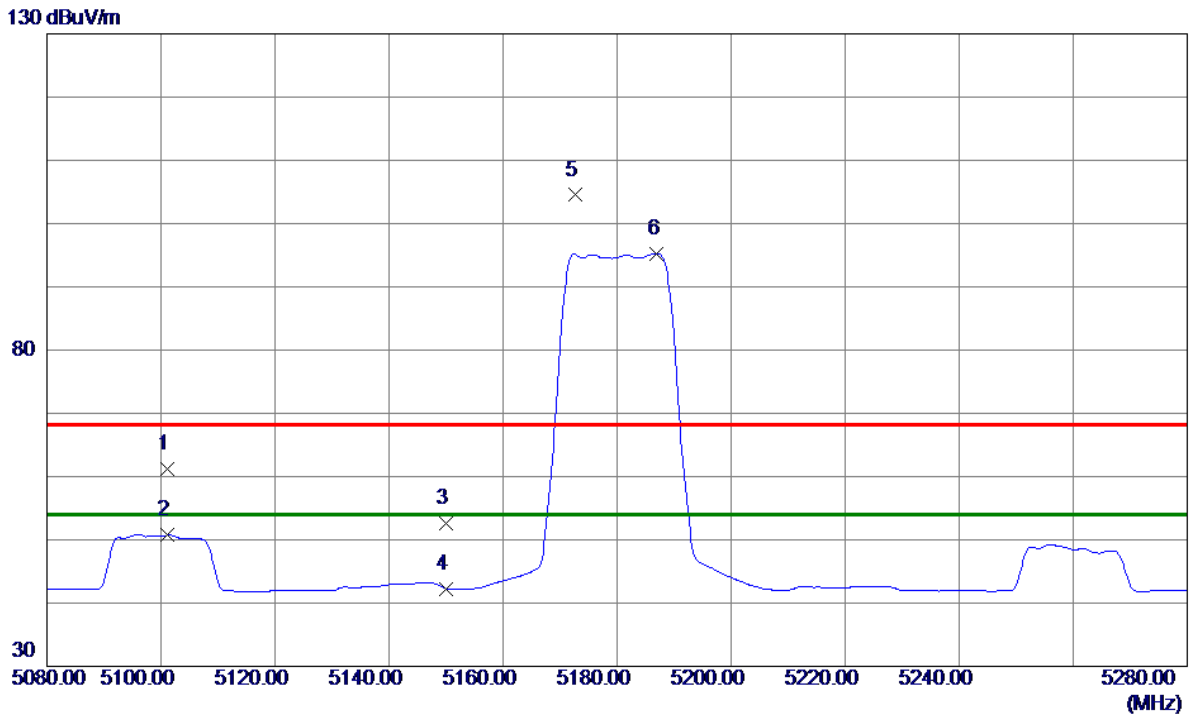


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5101.2000	20.41	40.85	61.26	68.30	-7.04	Peak	
2	5101.2000	9.92	40.85	50.77	54.00	-3.23	AVG	
3	5150.0000	11.56	41.10	52.66	68.30	-15.64	Peak	
4	5150.0000	1.18	41.10	42.28	54.00	-11.72	AVG	
5	5172.6000	63.28	41.22	104.50	68.30	36.20	Peak	No Limit
6 *	5187.0000	53.93	41.29	95.22	54.00	41.22	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz

Vertical


80 dBuV/m

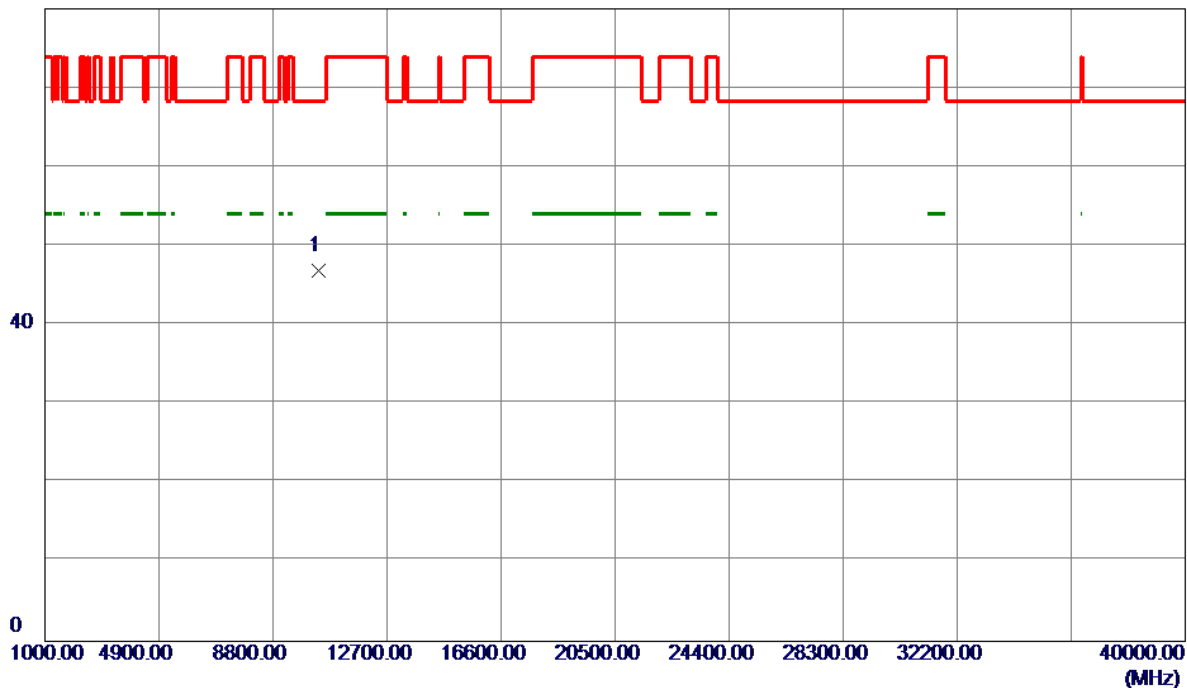

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10360.9900	30.50	16.33	46.83	68.30	-21.47	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz


Horizontal

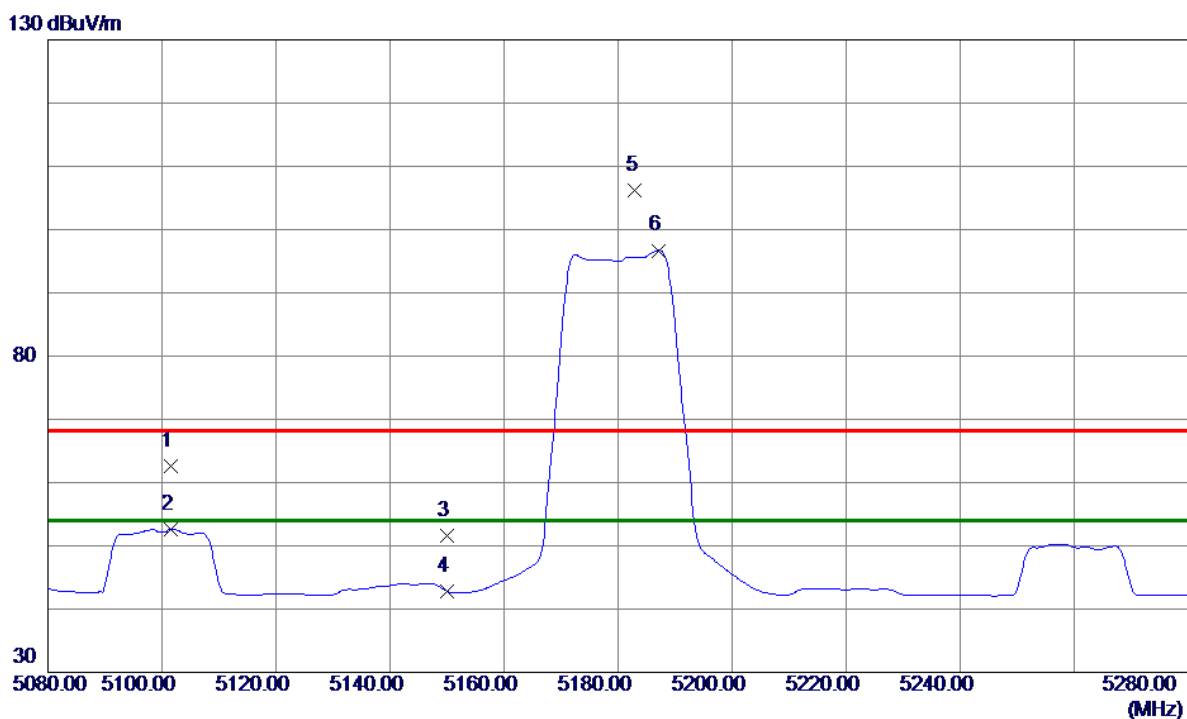

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5101.6000	21.75	40.86	62.61	68.30	-5.69	Peak	
2	5101.6000	11.80	40.86	52.66	54.00	-1.34	AVG	
3	5150.0000	10.53	41.10	51.63	68.30	-16.67	Peak	
4	5150.0000	1.71	41.10	42.81	54.00	-11.19	AVG	
5	5183.0000	64.87	41.27	106.14	68.30	37.84	Peak	No Limit
6 *	5187.2000	55.41	41.29	96.70	54.00	42.70	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz


Horizontal

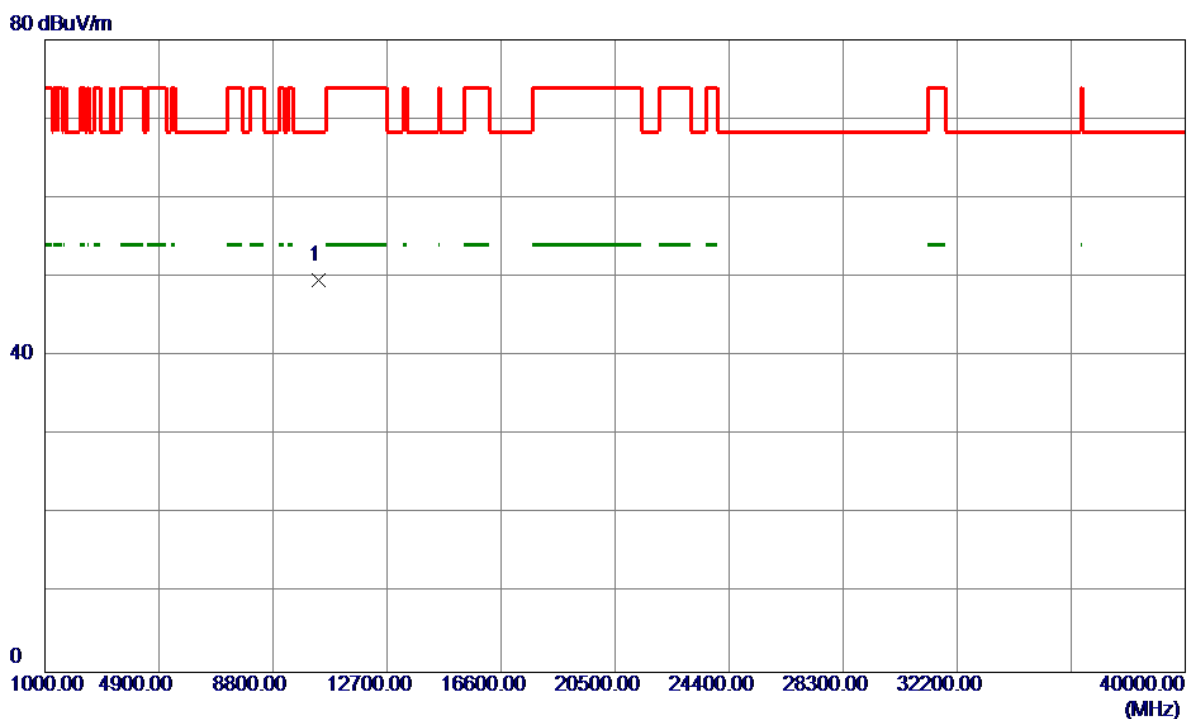

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10360.1400	33.22	16.33	49.55	68.30	-18.75	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200MHz

Vertical

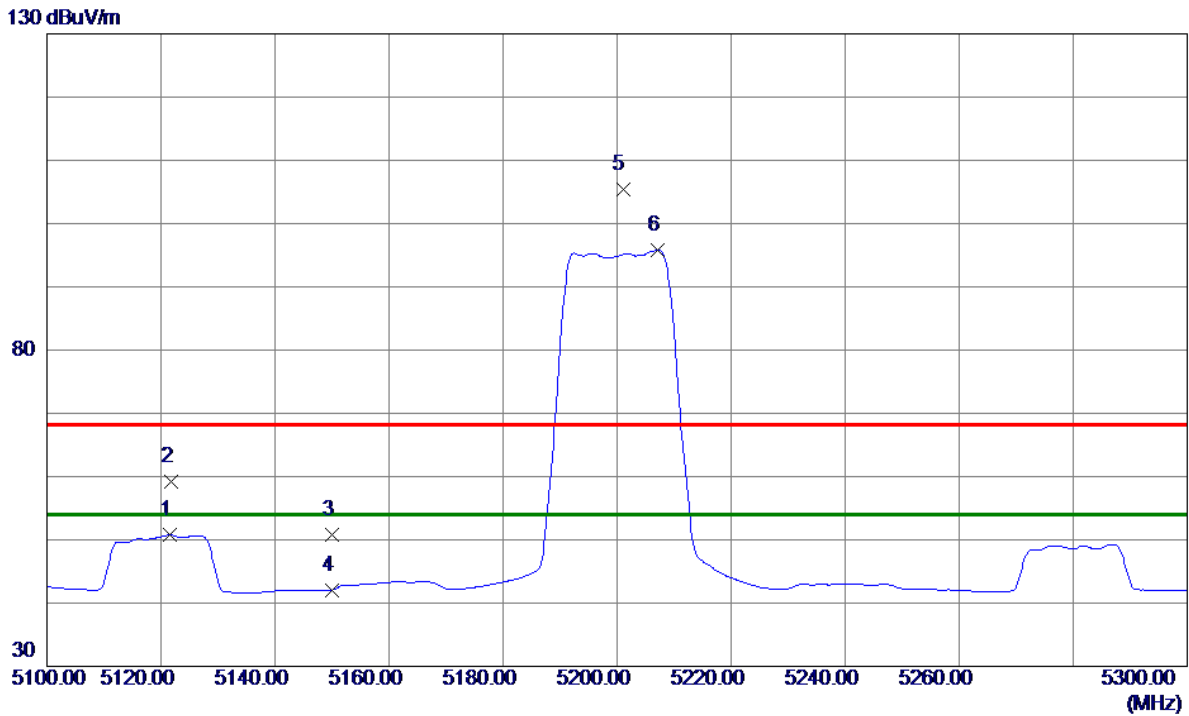


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5121.6000	9.84	40.96	50.80	54.00	-3.20	AVG	
2	5121.8000	18.33	40.96	59.29	68.30	-9.01	Peak	
3	5150.0000	9.76	41.10	50.86	68.30	-17.44	Peak	
4	5150.0000	0.98	41.10	42.08	54.00	-11.92	AVG	
5	5201.0000	64.11	41.36	105.47	68.30	37.17	Peak	No Limit
6 *	5207.2000	54.40	41.39	95.79	54.00	41.79	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200MHz

Vertical


80 dBuV/m

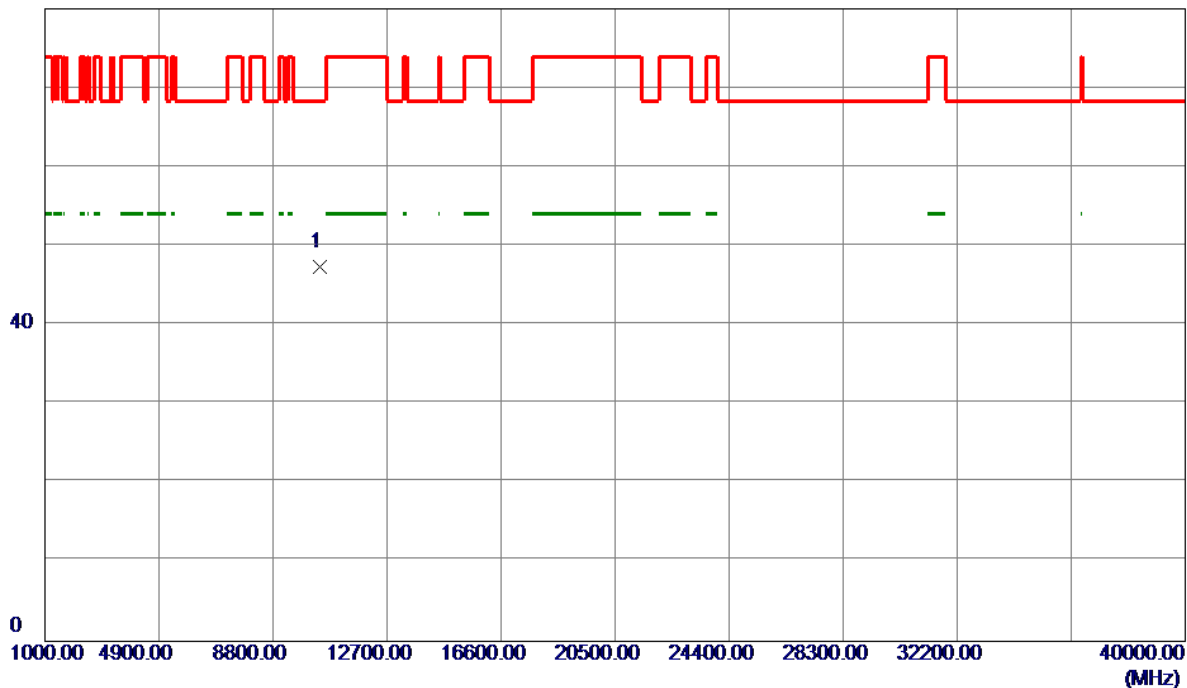

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10399.9750	30.90	16.44	47.34	68.30	-20.96	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200MHz

Horizontal

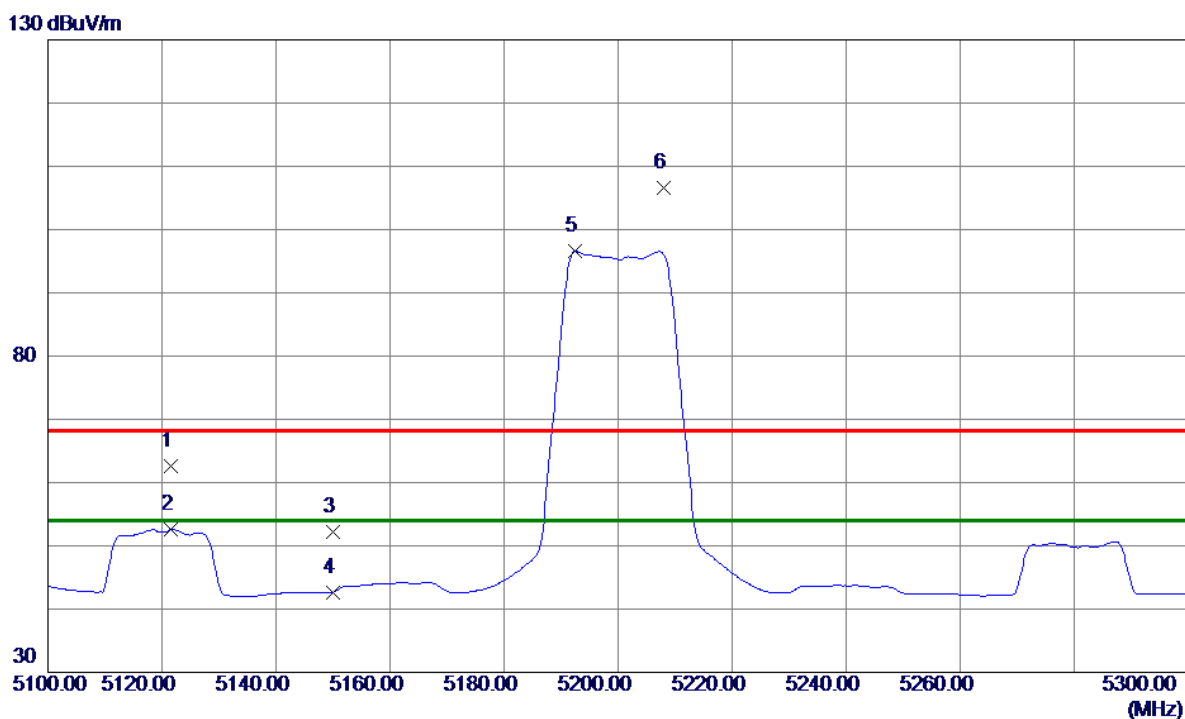


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5121.6000	21.56	40.96	62.52	68.30	-5.78	Peak	
2	5121.6000	11.64	40.96	52.60	54.00	-1.40	AVG	
3	5150.0000	11.19	41.10	52.29	68.30	-16.01	Peak	
4	5150.0000	1.56	41.10	42.66	54.00	-11.34	AVG	
5 *	5192.4000	55.27	41.32	96.59	54.00	42.59	AVG	No Limit
6	5208.0000	65.26	41.40	106.66	68.30	38.36	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200MHz

Horizontal


80 dBuV/m

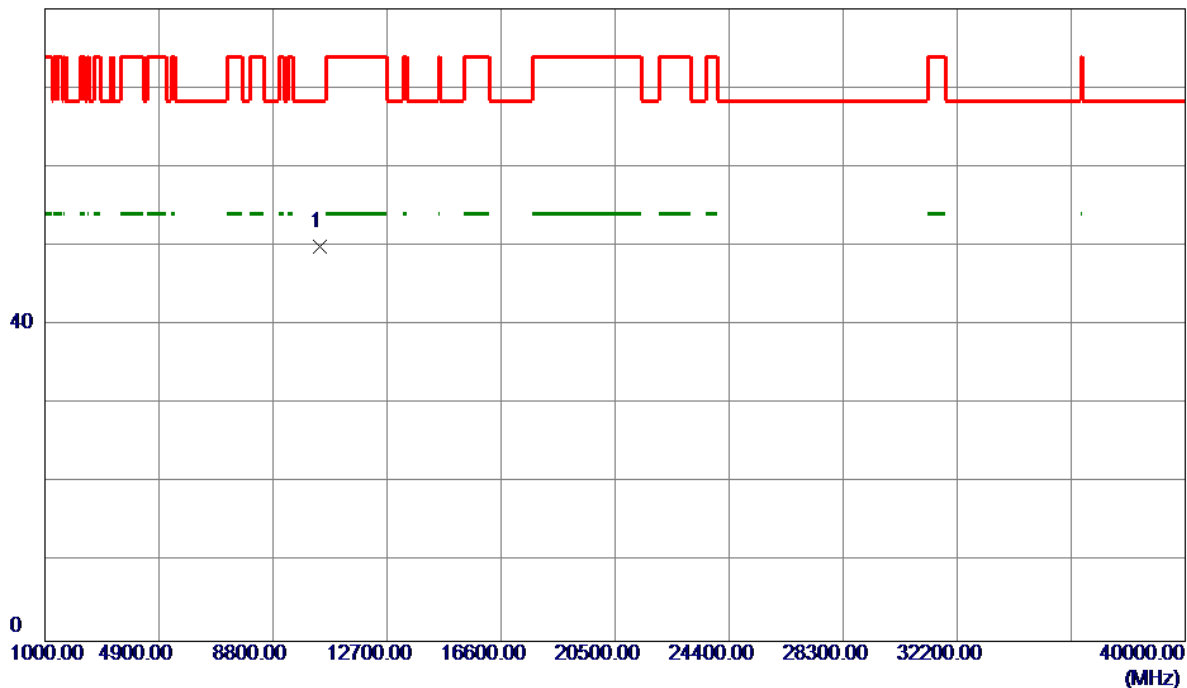

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10399.6500	33.41	16.44	49.85	68.30	-18.45	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

Vertical

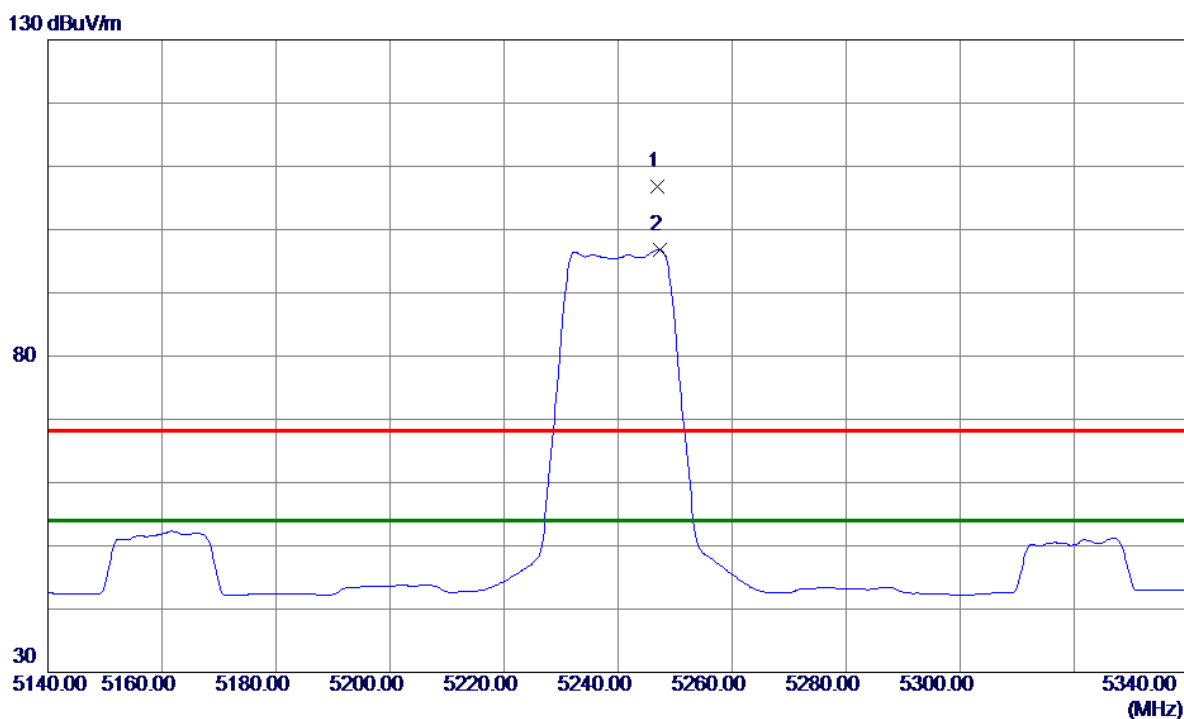


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5246.8000	65.13	41.59	106.72	68.30	38.42	Peak	No Limit
2 *	5247.4000	55.24	41.60	96.84	54.00	42.84	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

Vertical


80 dBuV/m

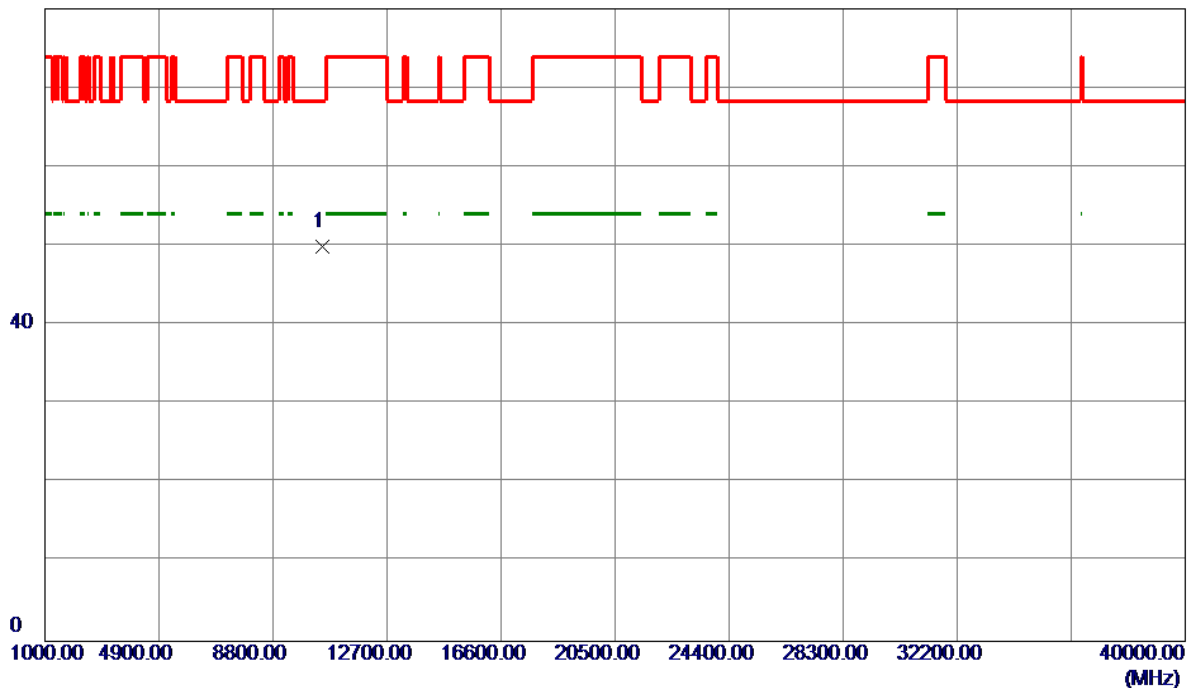

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10480.2000	33.22	16.65	49.87	68.30	-18.43	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz


Horizontal

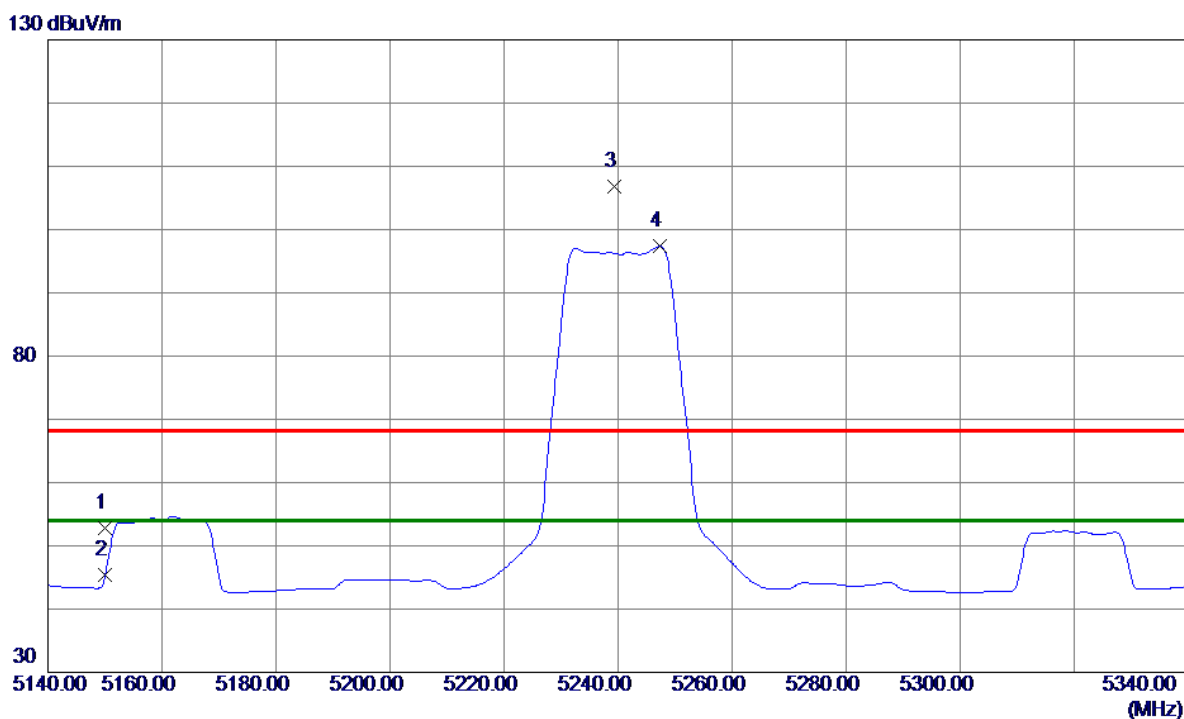

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	11.64	41.10	52.74	68.30	-15.56	Peak	
2	5150.0000	4.22	41.10	45.32	54.00	-8.68	AVG	
3	5239.4000	65.18	41.56	106.74	68.30	38.44	Peak	No Limit
4 *	5247.4000	55.72	41.60	97.32	54.00	43.32	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz


Horizontal

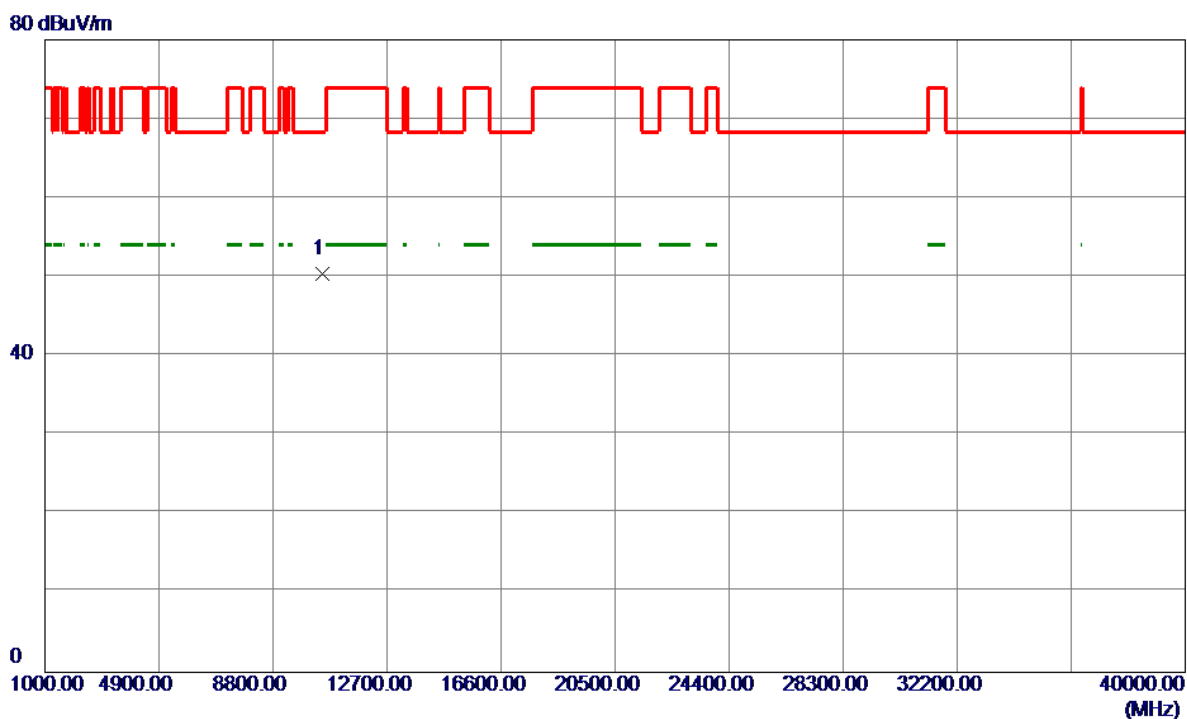

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10480.0250	33.81	16.65	50.46	68.30	-17.84	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Vertical

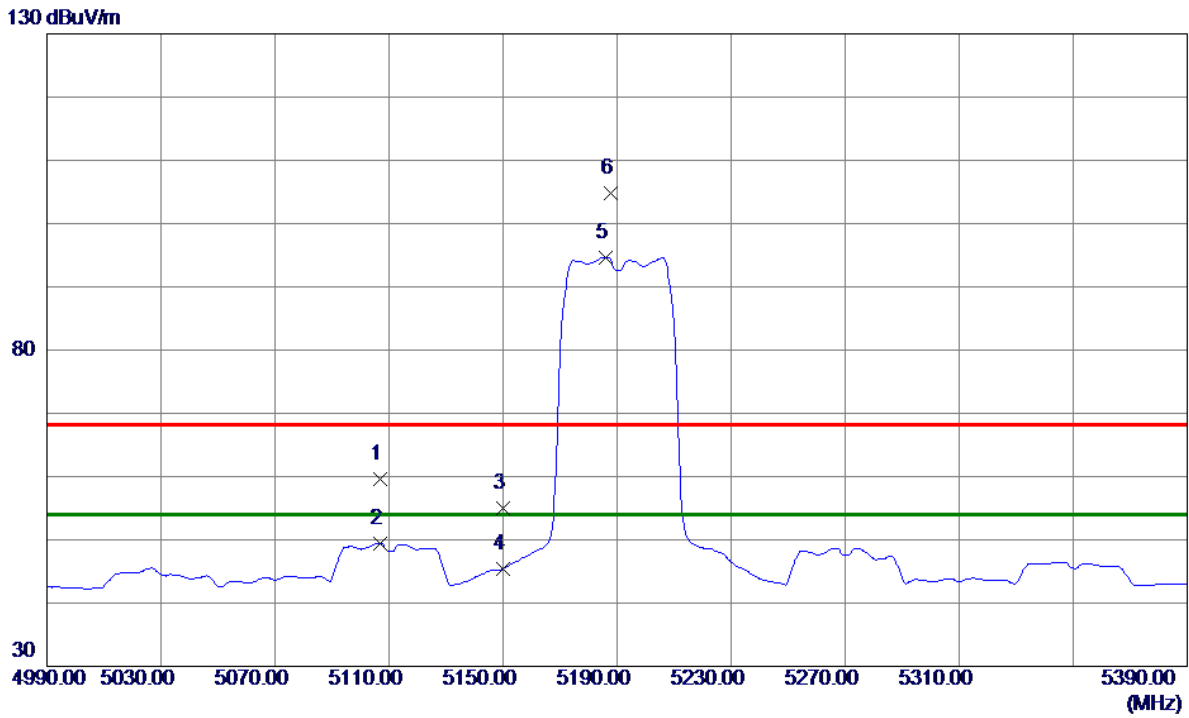


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5106.8000	18.75	40.88	59.63	68.30	-8.67	Peak	
2	5106.8000	8.60	40.88	49.48	54.00	-4.52	AVG	
3	5150.0000	13.83	41.10	54.93	68.30	-13.37	Peak	
4	5150.0000	4.36	41.10	45.46	54.00	-8.54	AVG	
5 *	5186.0000	53.41	41.28	94.69	54.00	40.69	AVG	No Limit
6	5187.6000	63.50	41.29	104.79	68.30	36.49	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Vertical


80 dBuV/m

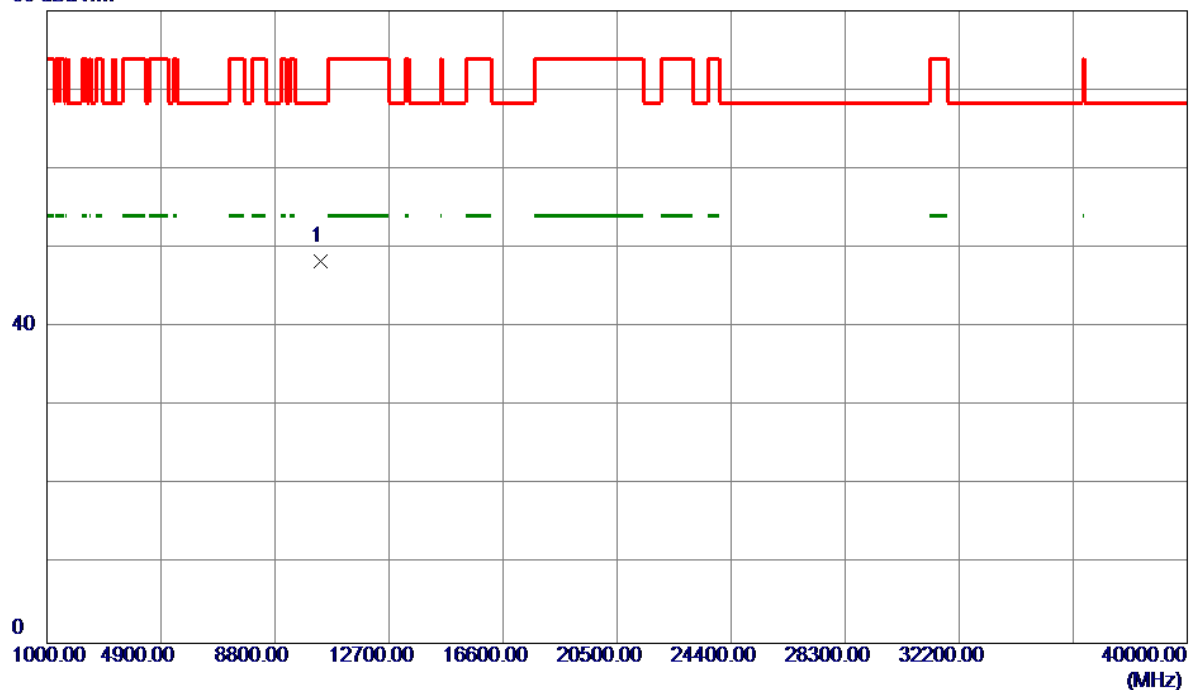

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10378.7750	31.90	16.38	48.28	68.30	-20.02	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz


Horizontal

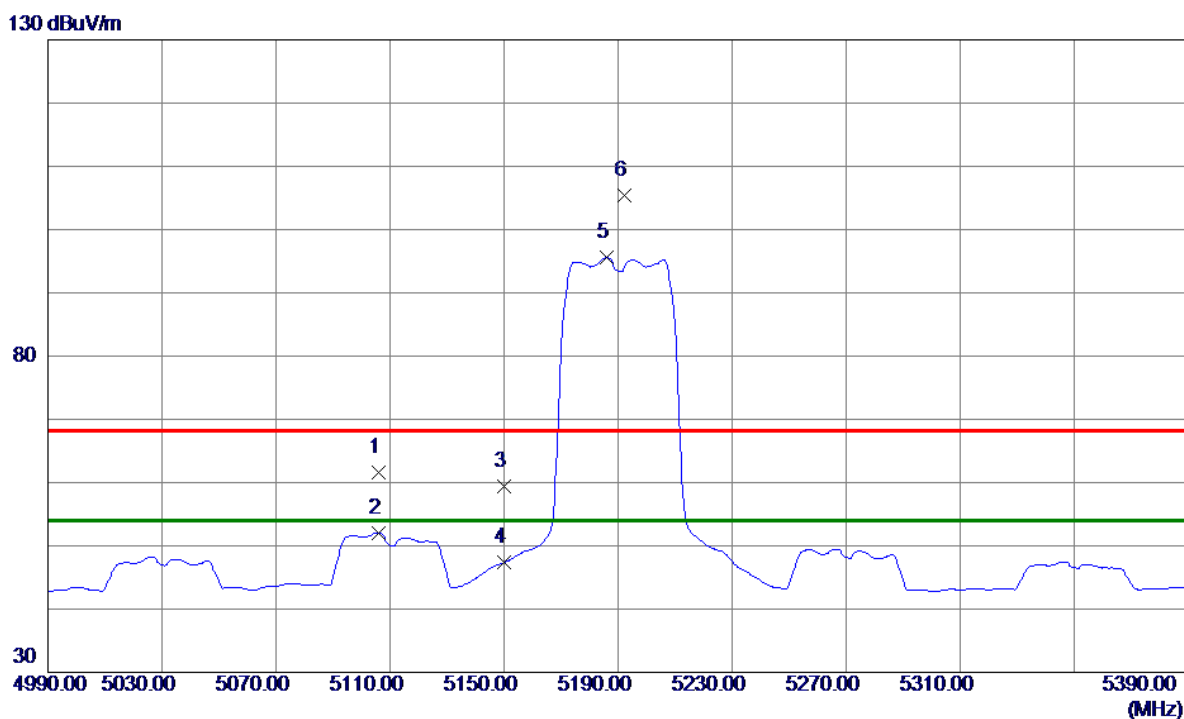

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5106.0000	20.74	40.88	61.62	68.30	-6.68	Peak	
2	5106.0000	11.14	40.88	52.02	54.00	-1.98	AVG	
3	5150.0000	18.24	41.10	59.34	68.30	-8.96	Peak	
4	5150.0000	6.23	41.10	47.33	54.00	-6.67	AVG	
5 *	5186.0000	54.27	41.28	95.55	54.00	41.55	AVG	No Limit
6	5192.4000	64.04	41.32	105.36	68.30	37.06	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz


Horizontal

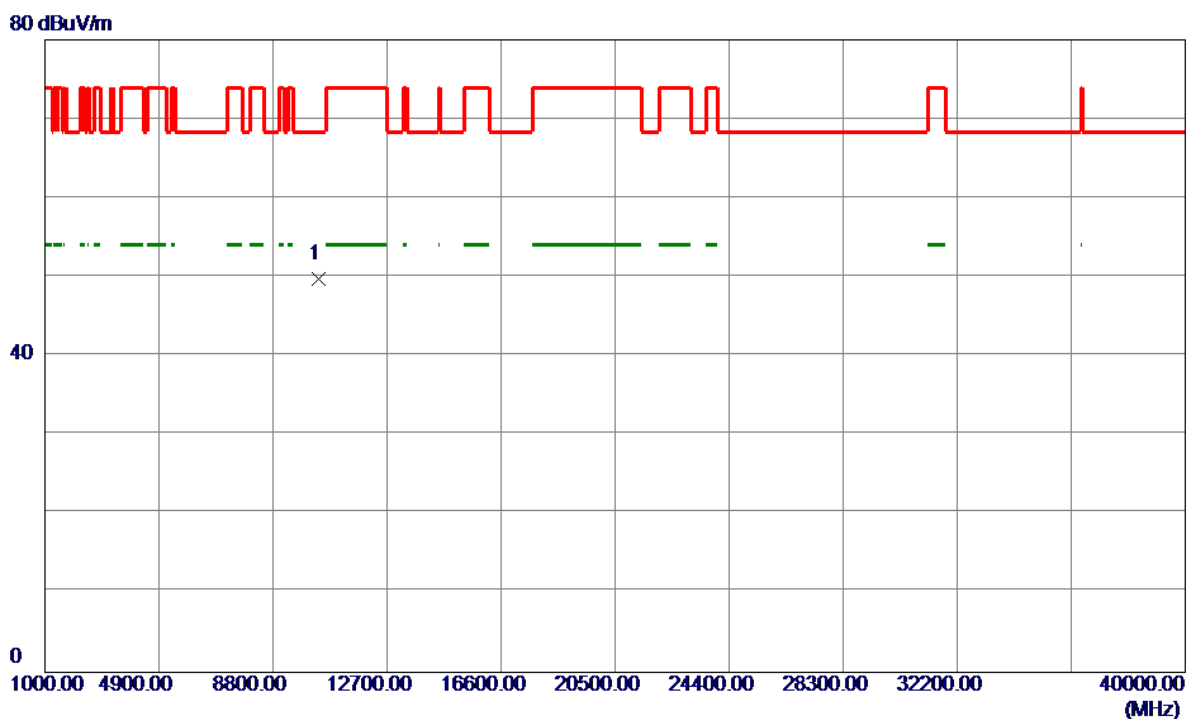

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10378.7150	33.40	16.38	49.78	68.30	-18.52	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Vertical

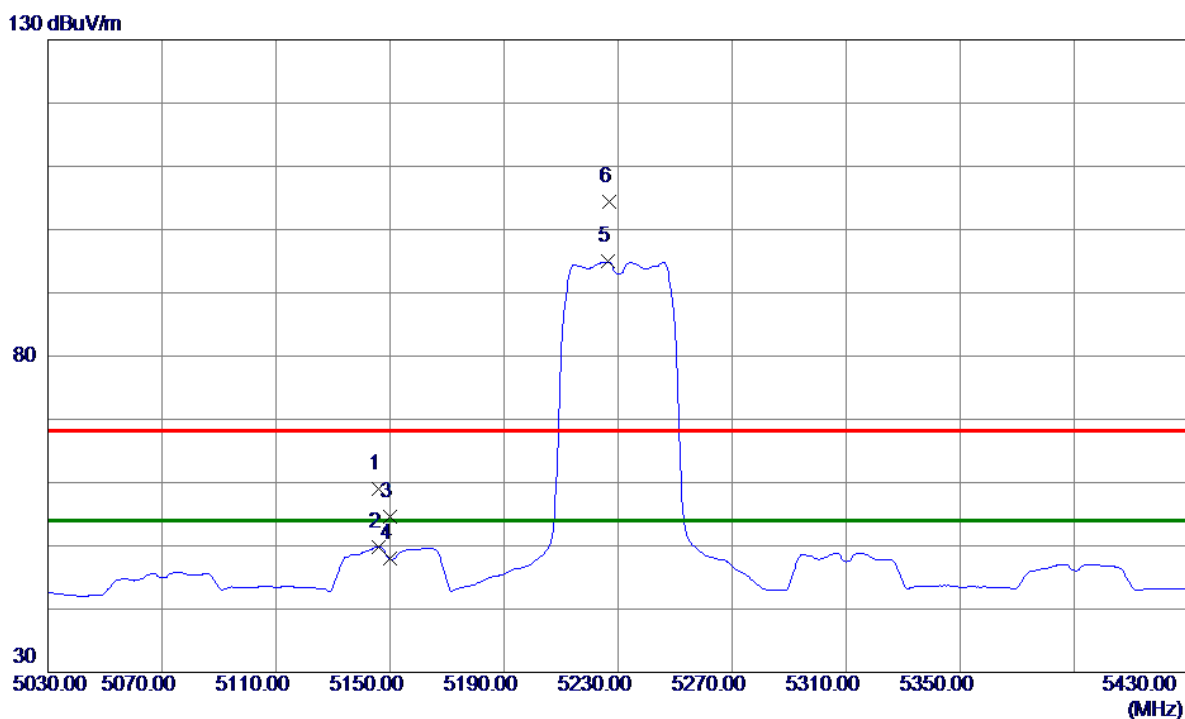


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5146.0000	17.94	41.08	59.02	68.30	-9.28	Peak	
2	5146.0000	8.67	41.08	49.75	54.00	-4.25	AVG	
3	5150.0000	13.48	41.10	54.58	68.30	-13.72	Peak	
4	5150.0000	6.85	41.10	47.95	54.00	-6.05	AVG	
5 *	5226.4000	53.41	41.49	94.90	54.00	40.90	AVG	No Limit
6	5226.8000	62.85	41.49	104.34	68.30	36.04	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Vertical


80 dBuV/m

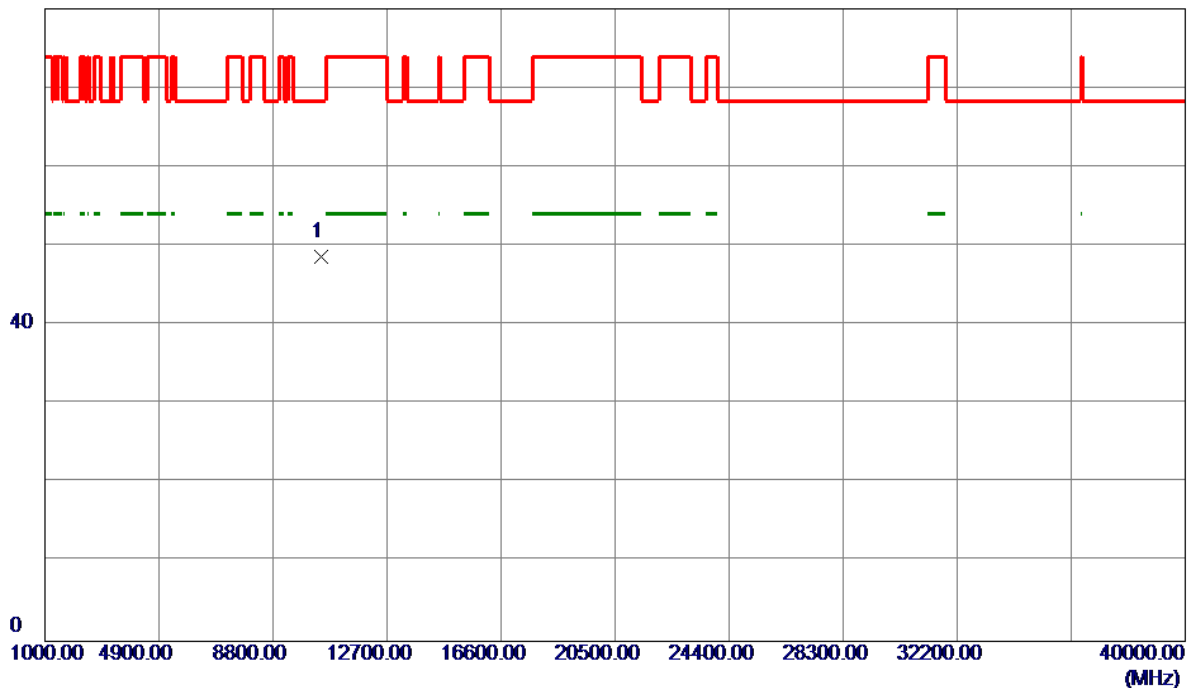

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10461.3250	32.11	16.60	48.71	68.30	-19.59	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Horizontal

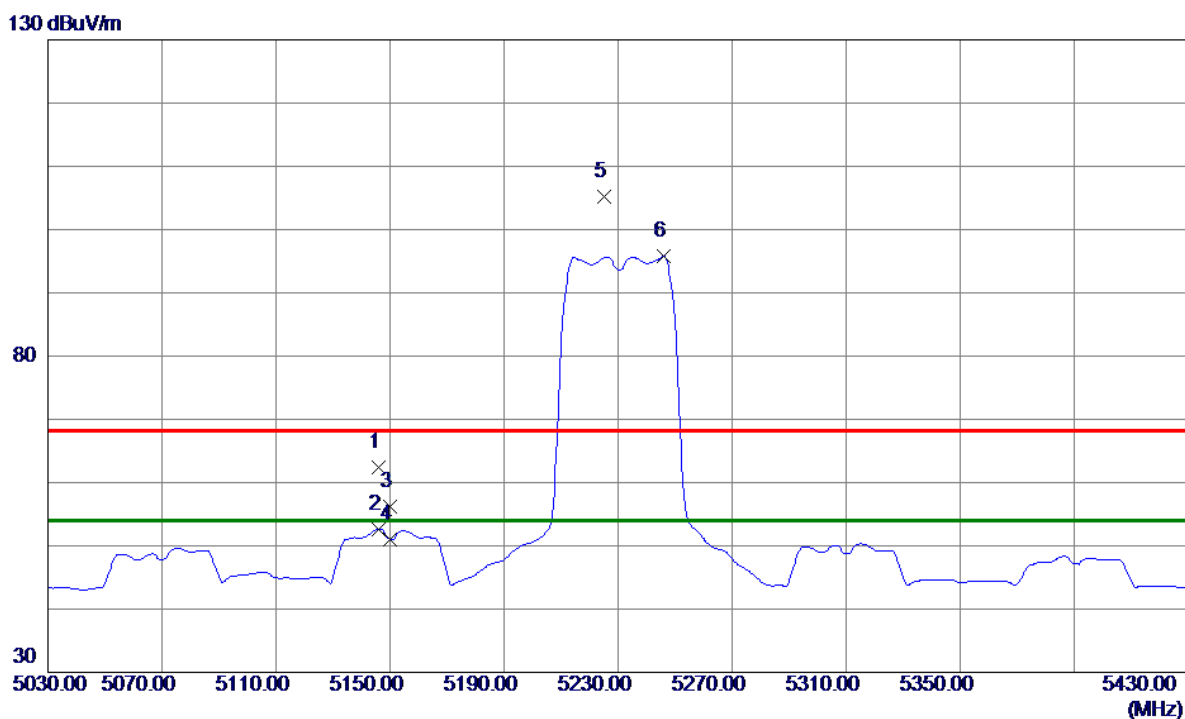


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5146.0000	21.33	41.08	62.41	68.30	-5.89	Peak	
2	5146.0000	11.53	41.08	52.61	54.00	-1.39	AVG	
3	5150.0000	15.12	41.10	56.22	68.30	-12.08	Peak	
4	5150.0000	9.91	41.10	51.01	54.00	-2.99	AVG	
5	5225.2000	63.75	41.48	105.23	68.30	36.93	Peak	No Limit
6 *	5246.0000	54.19	41.59	95.78	54.00	41.78	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Horizontal


80 dBuV/m

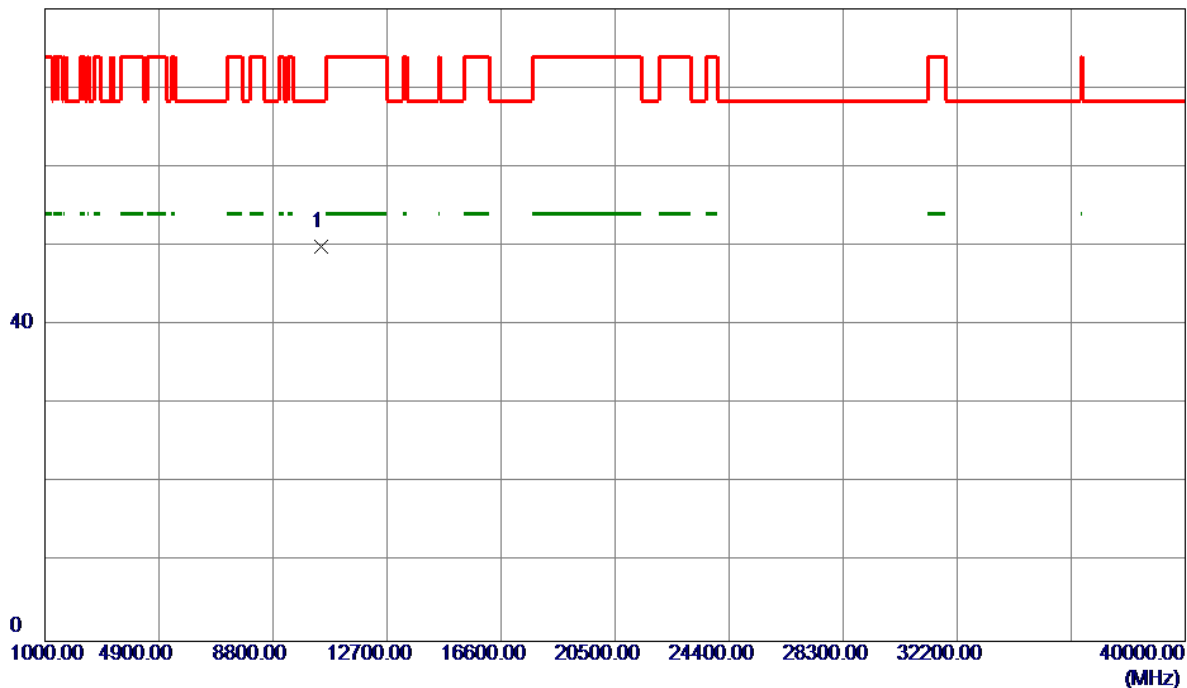

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10459.7500	33.29	16.60	49.89	68.30	-18.41	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Vertical

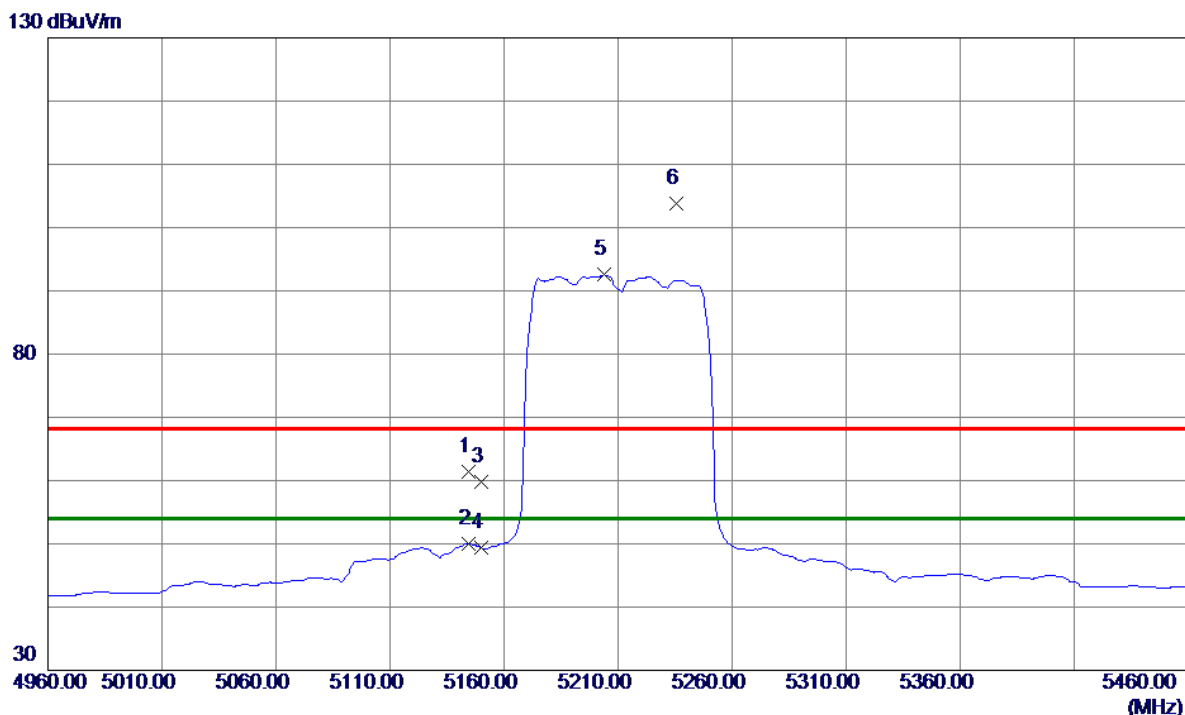


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5144.5000	20.33	41.07	61.40	68.30	-6.90	Peak	
2	5144.5000	8.98	41.07	50.05	54.00	-3.95	AVG	
3	5150.0000	18.63	41.10	59.73	68.30	-8.57	Peak	
4	5150.0000	8.21	41.10	49.31	54.00	-4.69	AVG	
5 *	5204.0000	51.13	41.38	92.51	54.00	38.51	AVG	No Limit
6	5235.5000	62.24	41.54	103.78	68.30	35.48	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Vertical


80 dBuV/m

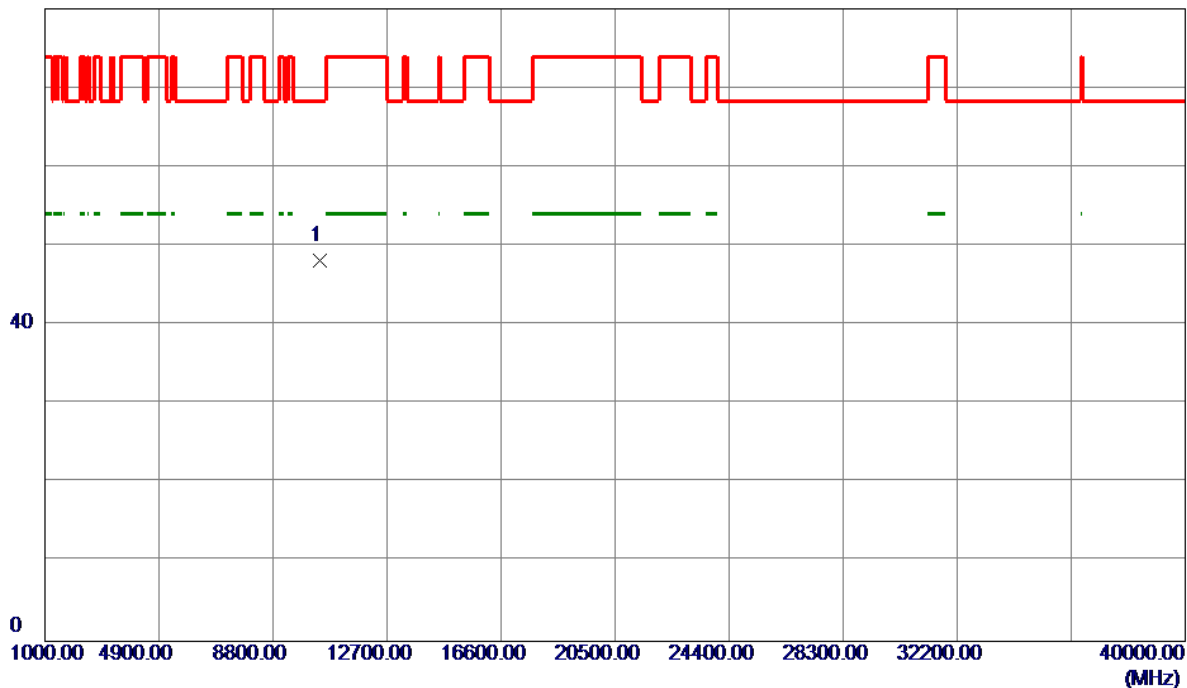

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10420.5050	31.62	16.49	48.11	68.30	-20.19	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz


Horizontal

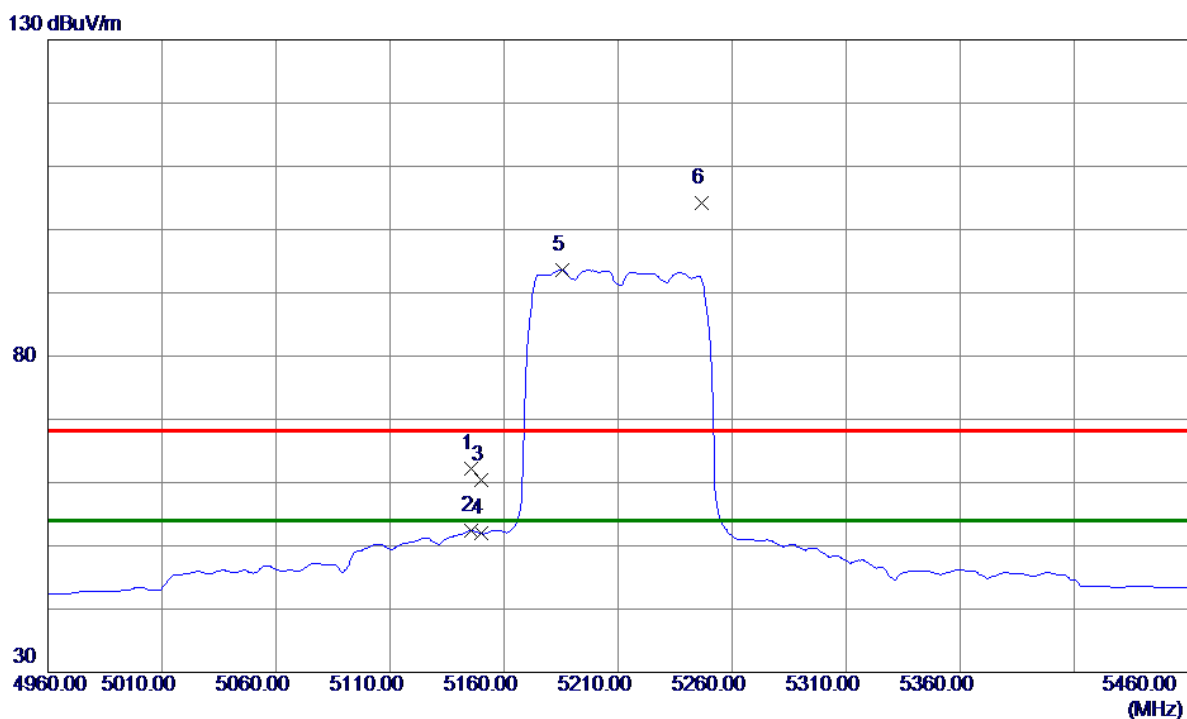

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5145.5000	21.09	41.08	62.17	68.30	-6.13	Peak	
2	5145.5000	11.29	41.08	52.37	54.00	-1.63	AVG	
3	5150.0000	19.30	41.10	60.40	68.30	-7.90	Peak	
4	5150.0000	10.84	41.10	51.94	54.00	-2.06	AVG	
5 *	5185.5000	52.33	41.28	93.61	54.00	39.61	AVG	No Limit
6	5246.5000	62.53	41.59	104.12	68.30	35.82	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz


Horizontal

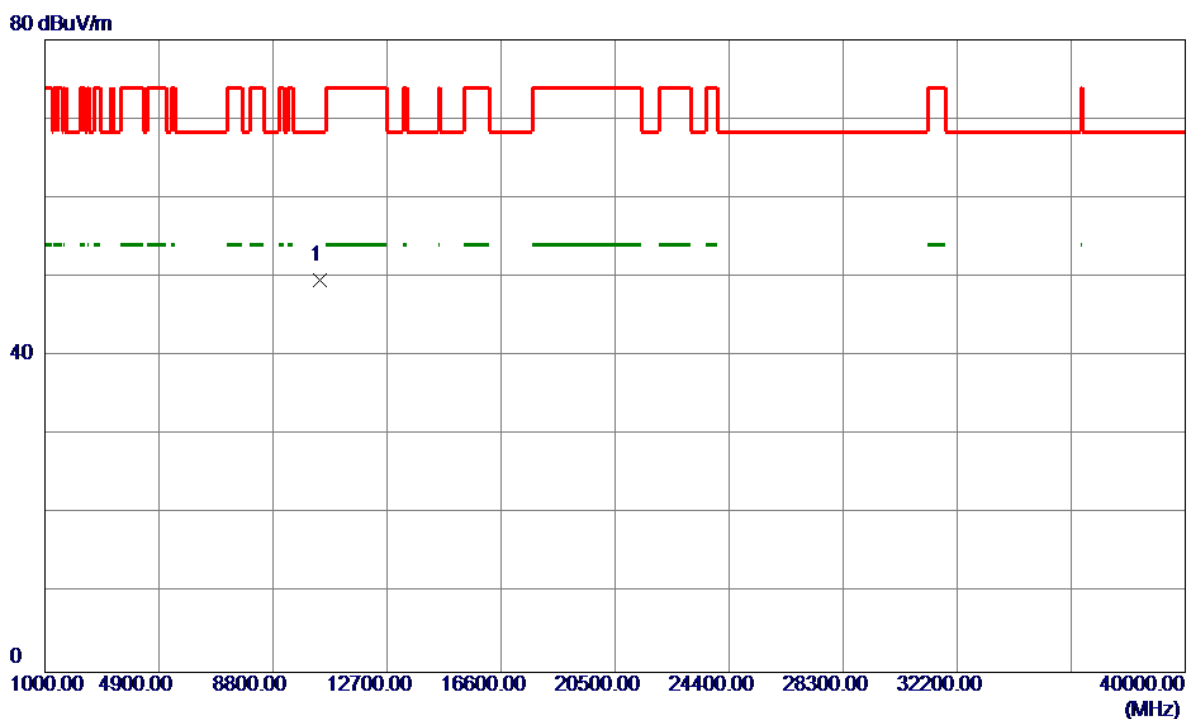

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10419.8300	33.06	16.49	49.55	68.30	-18.75	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz

Vertical

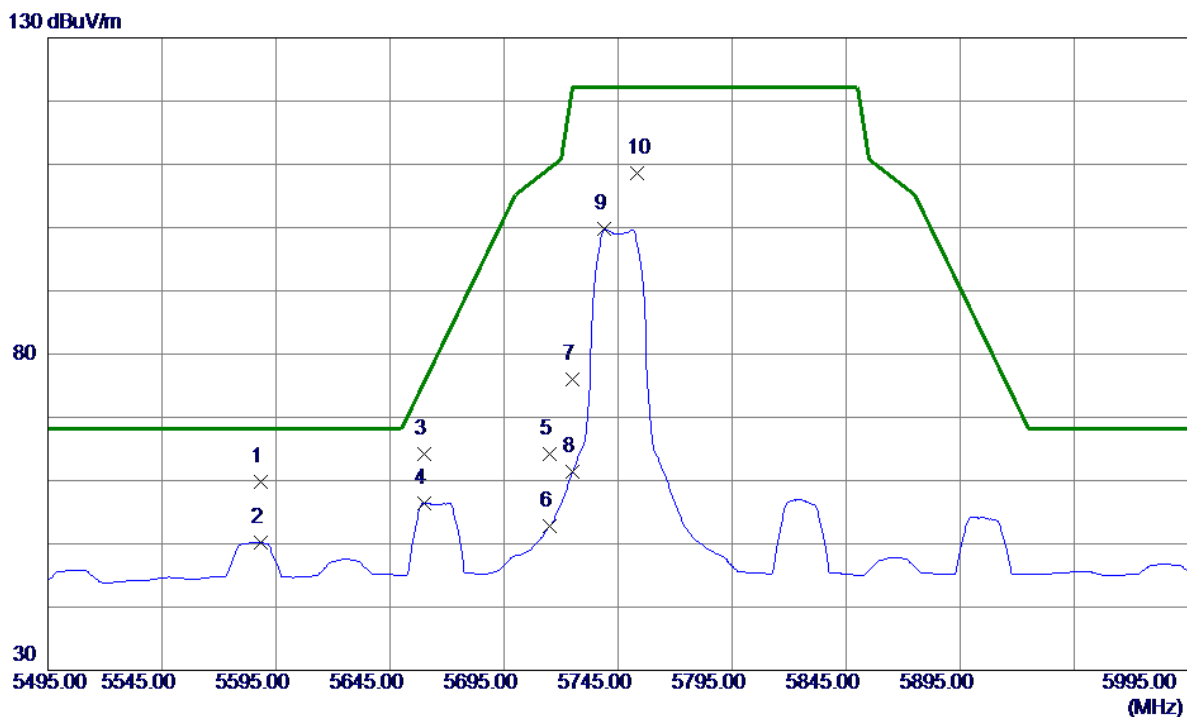


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5588.5000	16.66	43.15	59.81	68.20	-8.39	Peak	
2	5588.5000	7.13	43.15	50.28	68.20	-17.92	AVG	
3	5660.0000	20.89	43.36	64.25	75.60	-11.35	Peak	
4	5660.0000	13.12	43.36	56.48	75.60	-19.12	AVG	
5	5715.0000	20.74	43.53	64.27	109.40	-45.13	Peak	
6	5715.0000	9.32	43.53	52.85	109.40	-56.55	AVG	
7	5725.0000	32.36	43.56	75.92	122.20	-46.28	Peak	
8	5725.0000	17.86	43.56	61.42	122.20	-60.78	AVG	
9	5739.0000	56.17	43.60	99.77	122.20	-22.43	AVG	
10	5753.5000	64.89	43.65	108.54	122.20	-13.66	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz

Vertical


80 dBuV/m

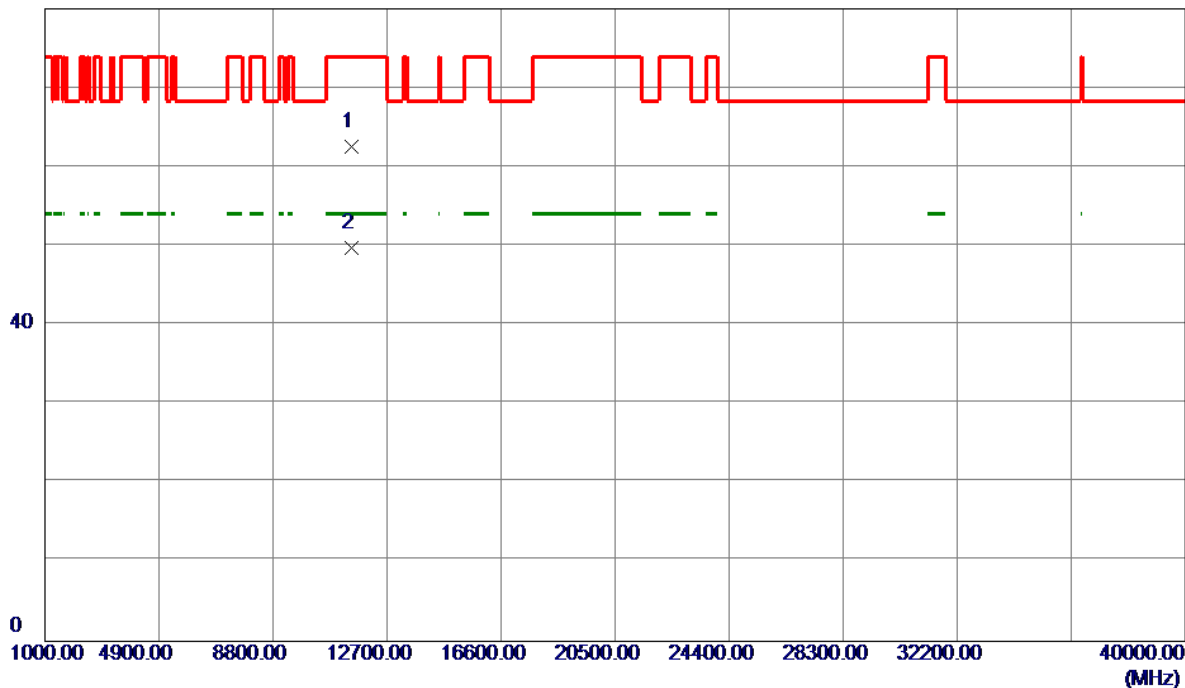

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11488.6000	44.85	17.74	62.59	74.00	-11.41	Peak	
2 *	11490.0000	32.06	17.75	49.81	54.00	-4.19	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz

Horizontal

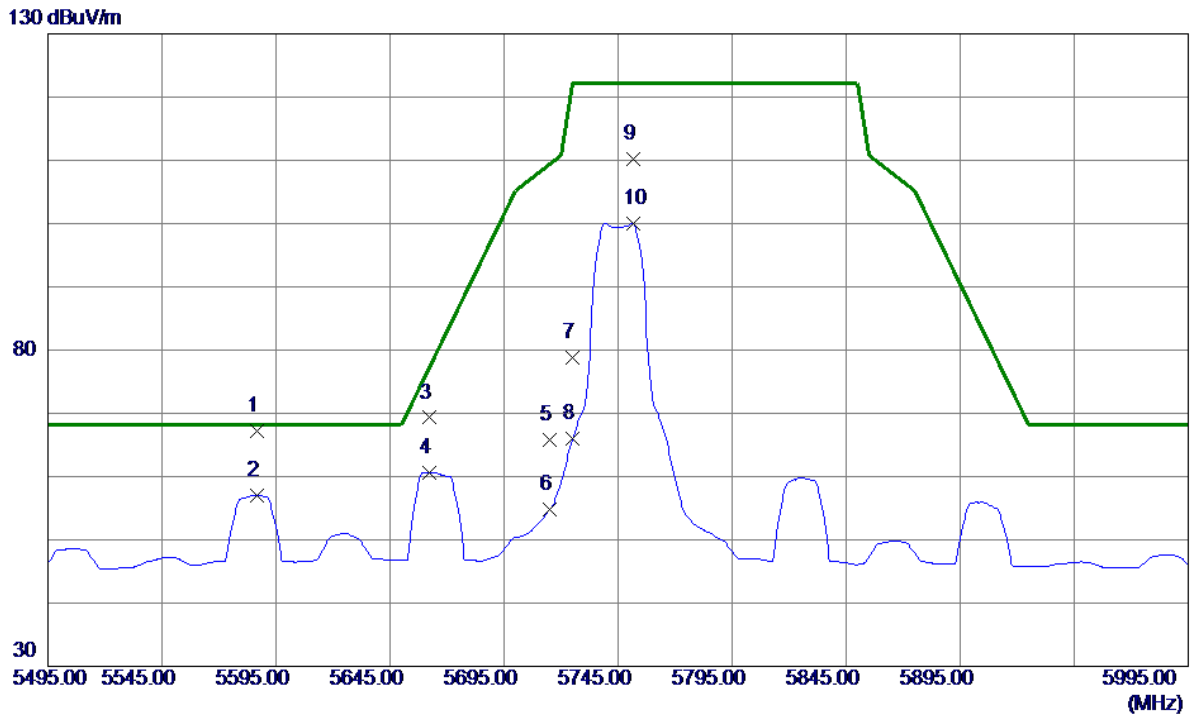


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5586.5000	24.02	43.14	67.16	68.20	-1.04	Peak	
2	5586.5000	13.91	43.14	57.05	68.20	-11.15	AVG	
3	5662.0000	25.93	43.37	69.30	77.08	-7.78	Peak	
4	5662.0000	17.32	43.37	60.69	77.08	-16.39	AVG	
5	5715.0000	22.26	43.53	65.79	109.40	-43.61	Peak	
6	5715.0000	11.29	43.53	54.82	109.40	-54.58	AVG	
7	5725.0000	35.22	43.56	78.78	122.20	-43.42	Peak	
8	5725.0000	22.41	43.56	65.97	122.20	-56.23	AVG	
9	5751.5000	66.50	43.64	110.14	122.20	-12.06	Peak	
10	5751.5000	56.45	43.64	100.09	122.20	-22.11	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz

Horizontal


80 dBuV/m

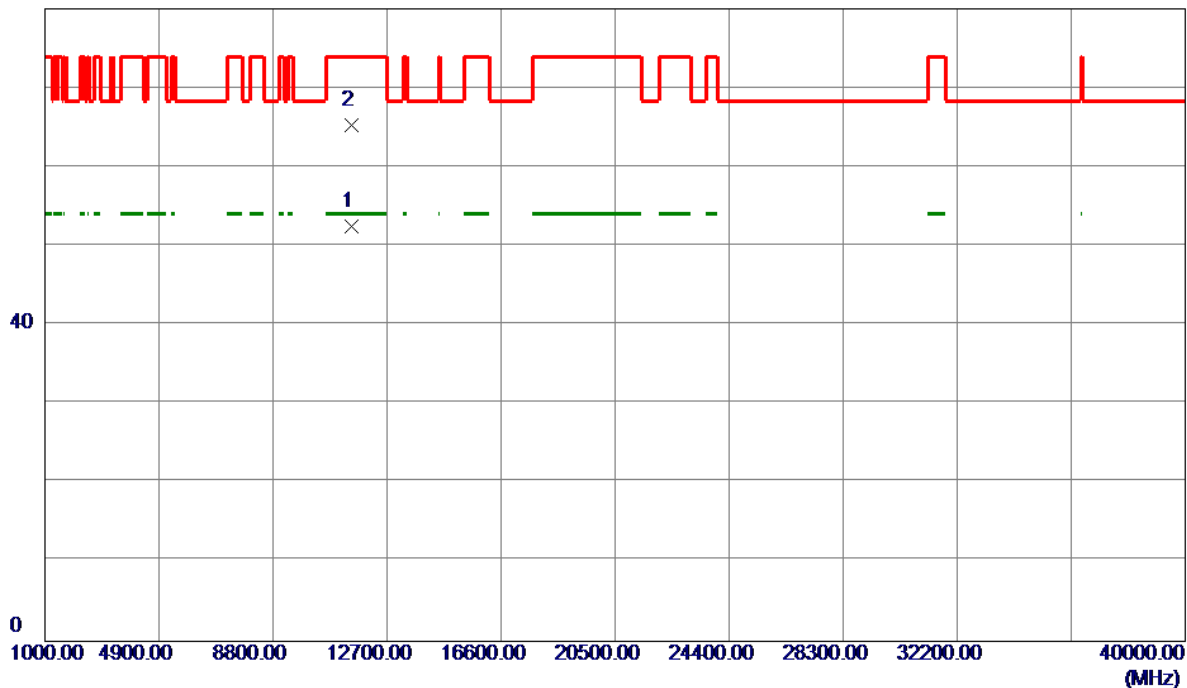

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11488.7000	34.68	17.75	52.43	54.00	-1.57	AVG	
2	11498.8500	47.52	17.78	65.30	74.00	-8.70	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz

Vertical

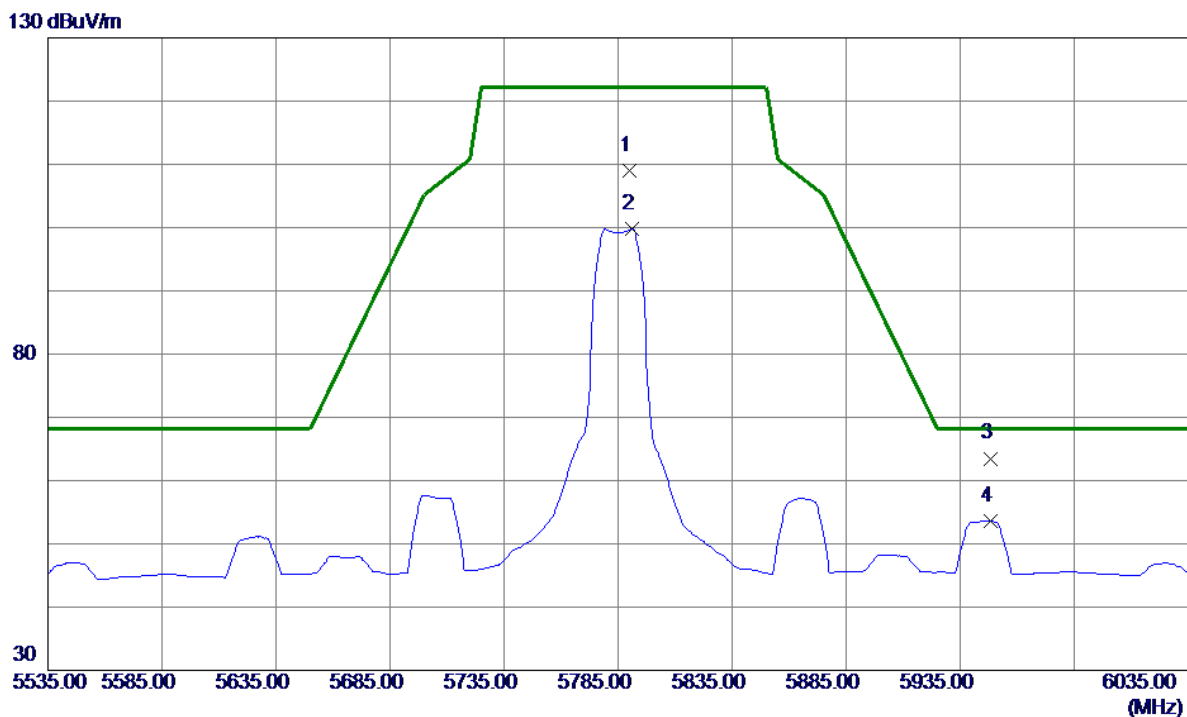


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5790.0000	65.21	43.76	108.97	122.20	-13.23	Peak	
2	5791.0000	56.07	43.76	99.83	122.20	-22.37	AVG	
3 *	5948.5000	19.27	44.23	63.50	68.20	-4.70	Peak	
4	5948.5000	9.43	44.23	53.66	68.20	-14.54	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz

Vertical


80 dBuV/m

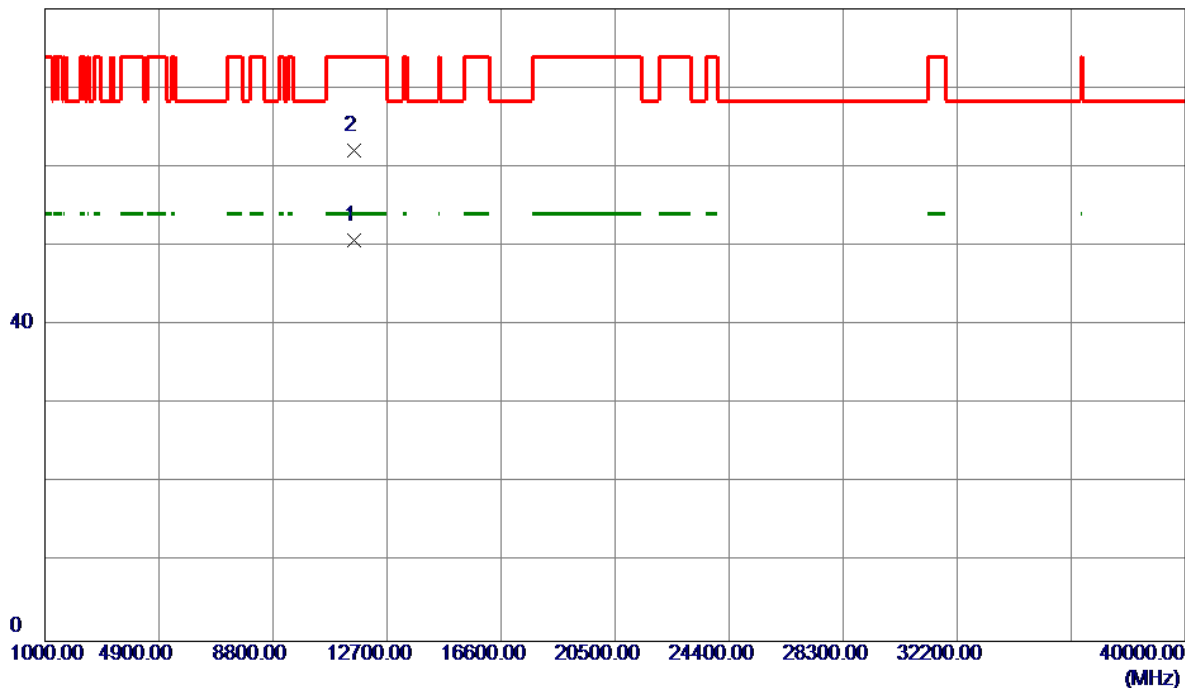

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11570.2000	32.94	17.82	50.76	54.00	-3.24	AVG	
2	11578.7500	44.19	17.82	62.01	74.00	-11.99	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz

Horizontal

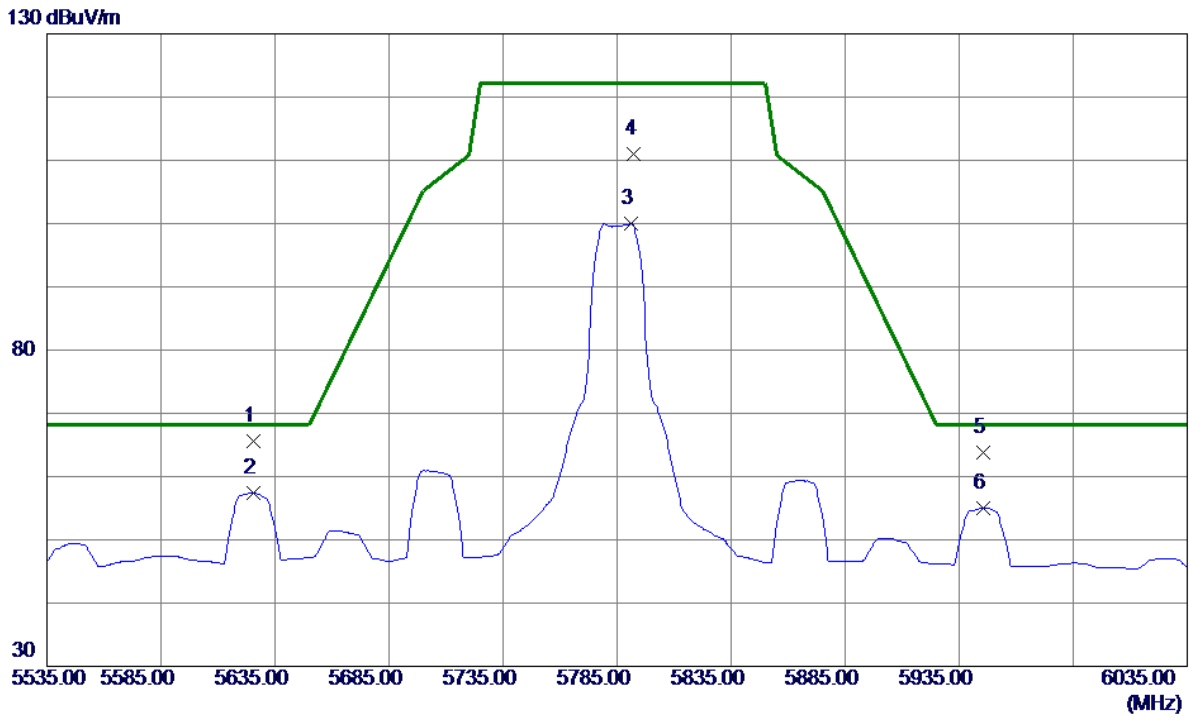


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5625.5000	22.27	43.26	65.53	68.20	-2.67	Peak	
2	5625.5000	14.17	43.26	57.43	68.20	-10.77	AVG	
3	5791.0000	56.33	43.76	100.09	122.20	-22.11	AVG	
4	5792.5000	67.33	43.76	111.09	122.20	-11.11	Peak	
5	5945.5000	19.61	44.23	63.84	68.20	-4.36	Peak	
6	5945.5000	10.86	44.23	55.09	68.20	-13.11	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz

Horizontal


80 dBuV/m

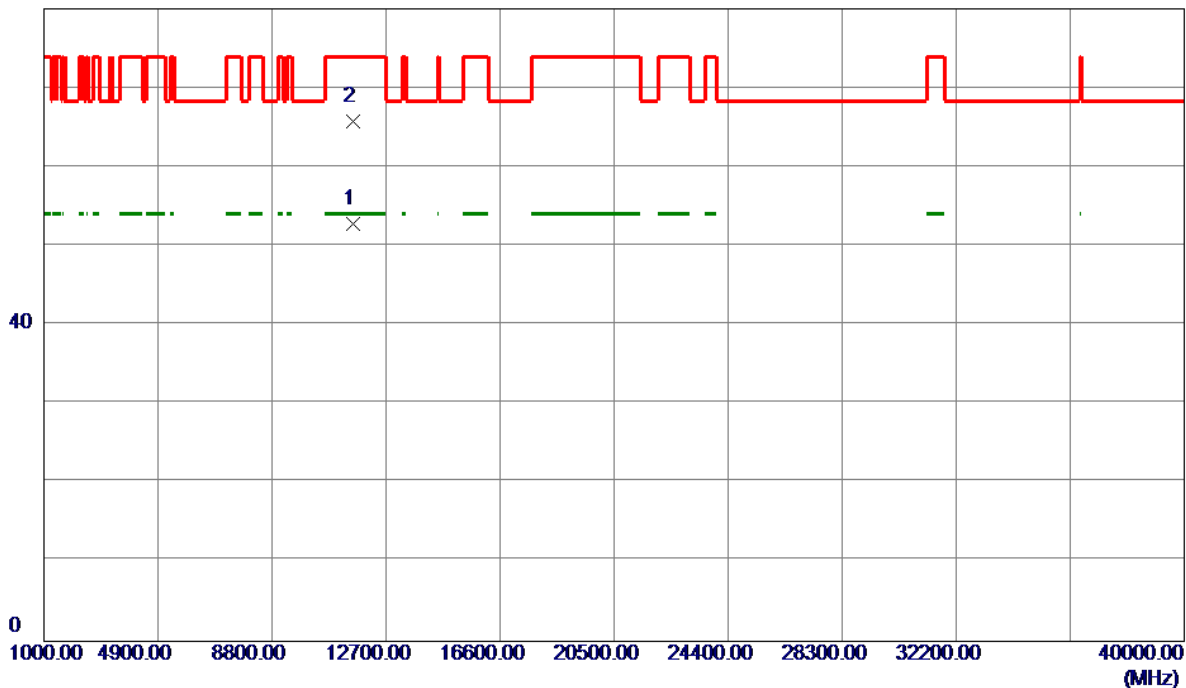

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11568.8000	35.02	17.82	52.84	54.00	-1.16	AVG	
2	11578.7000	47.88	17.82	65.70	74.00	-8.30	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz

Vertical

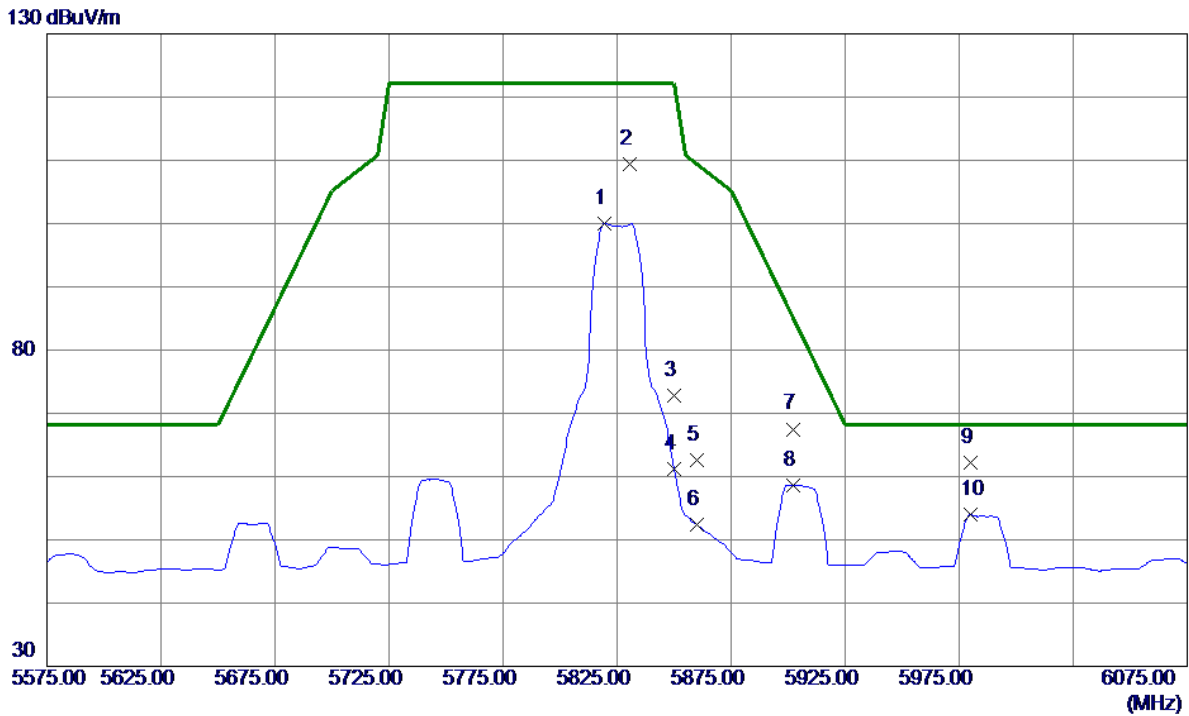


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5819.5000	56.20	43.84	100.04	122.20	-22.16	AVG	
2	5830.5000	65.46	43.88	109.34	122.20	-12.86	Peak	
3	5850.0000	28.82	43.94	72.76	122.20	-49.44	Peak	
4	5850.0000	17.23	43.94	61.17	122.20	-61.03	AVG	
5	5860.0000	18.60	43.97	62.57	109.40	-46.83	Peak	
6	5860.0000	8.36	43.97	52.33	109.40	-57.07	AVG	
7	5902.0000	23.41	44.09	67.50	85.22	-17.72	Peak	
8	5902.0000	14.54	44.09	58.63	85.22	-26.59	AVG	
9 *	5980.0000	17.84	44.33	62.17	68.20	-6.03	Peak	
10	5980.0000	9.58	44.33	53.91	68.20	-14.29	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz

Vertical


80 dBuV/m

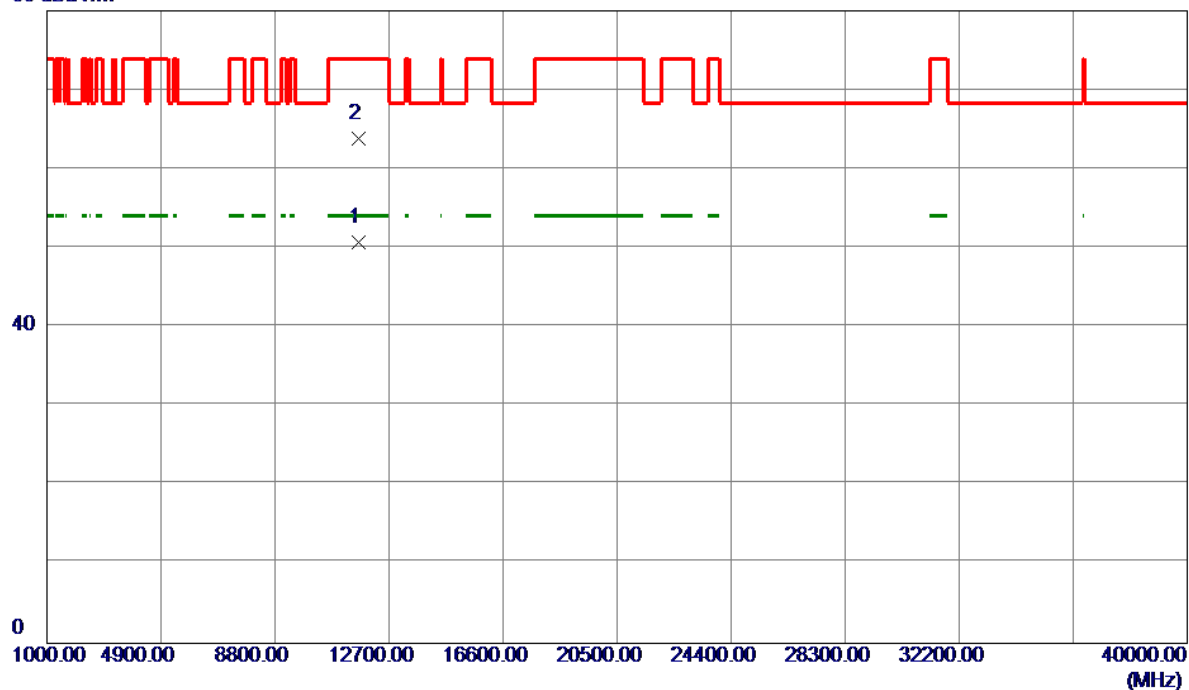

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11648.5500	32.83	17.86	50.69	54.00	-3.31	AVG	
2	11659.0000	46.04	17.86	63.90	74.00	-10.10	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz

Horizontal

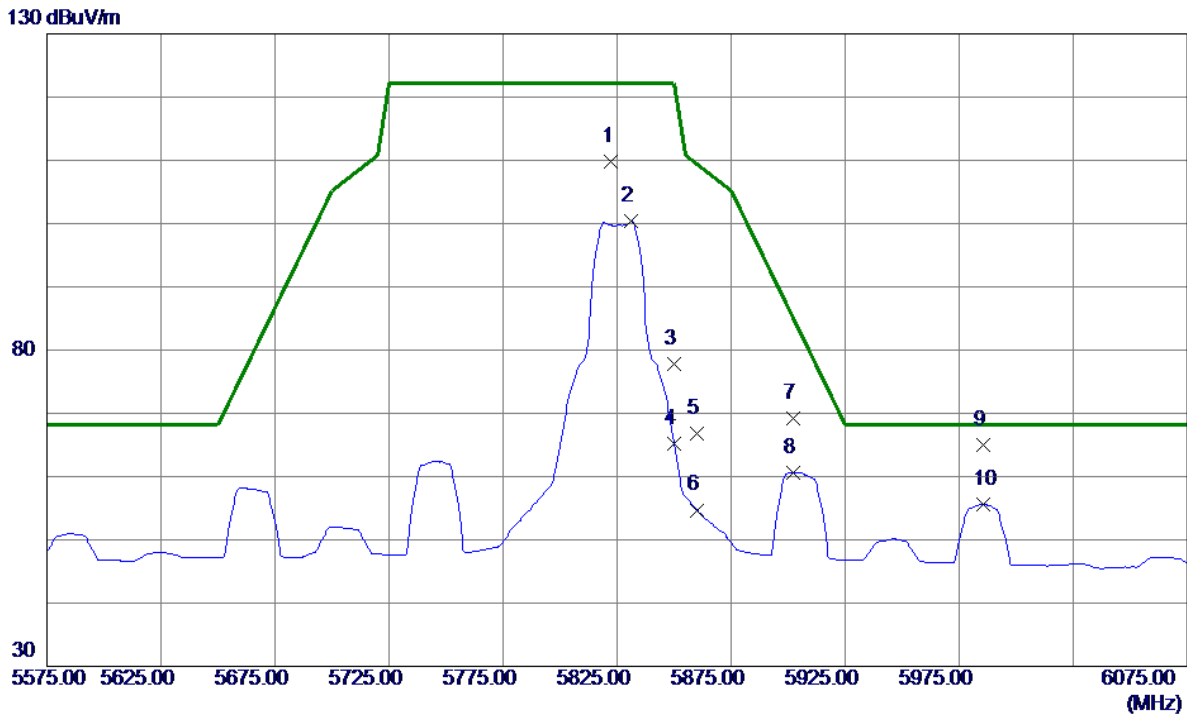


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5822.5000	66.01	43.85	109.86	122.20	-12.34	Peak	
2	5831.0000	56.49	43.88	100.37	122.20	-21.83	AVG	
3	5850.0000	33.86	43.94	77.80	122.20	-44.40	Peak	
4	5850.0000	21.17	43.94	65.11	122.20	-57.09	AVG	
5	5860.0000	22.90	43.97	66.87	109.40	-42.53	Peak	
6	5860.0000	10.73	43.97	54.70	109.40	-54.70	AVG	
7	5902.0000	25.04	44.09	69.13	85.22	-16.09	Peak	
8	5902.0000	16.60	44.09	60.69	85.22	-24.53	AVG	
9 *	5985.5000	20.71	44.35	65.06	68.20	-3.14	Peak	
10	5985.5000	11.30	44.35	55.65	68.20	-12.55	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz

Horizontal


80 dBuV/m

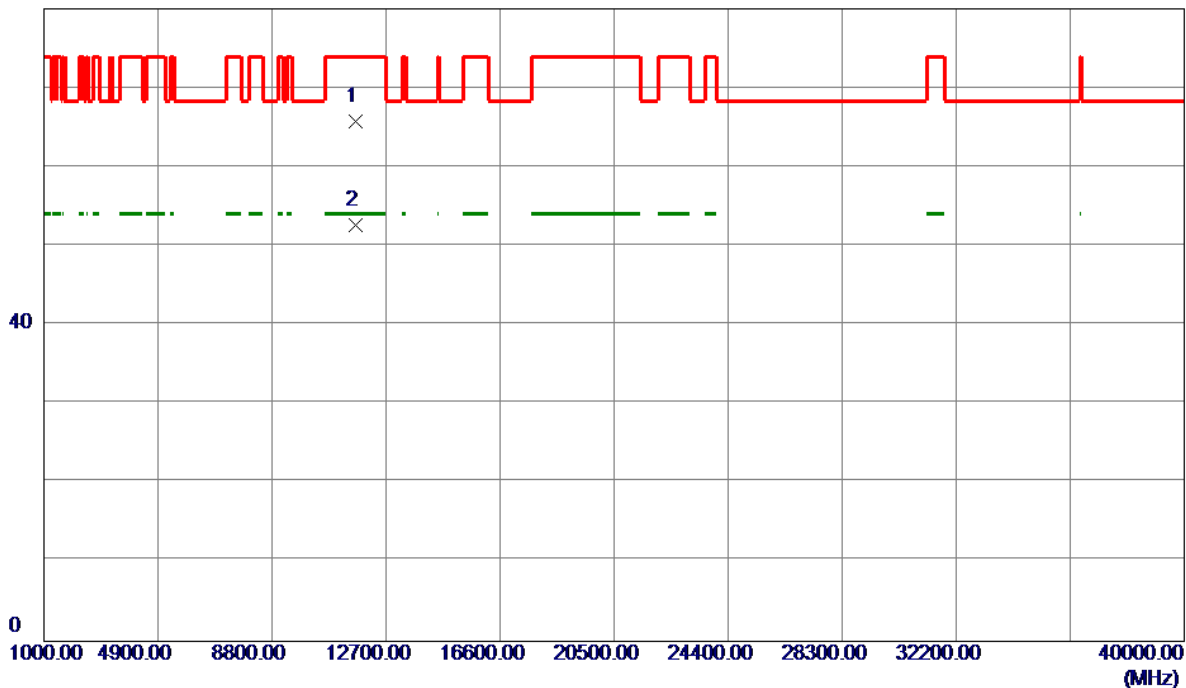

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11648.6500	47.90	17.86	65.76	74.00	-8.24	Peak	
2 *	11648.7500	34.85	17.86	52.71	54.00	-1.29	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz

Vertical

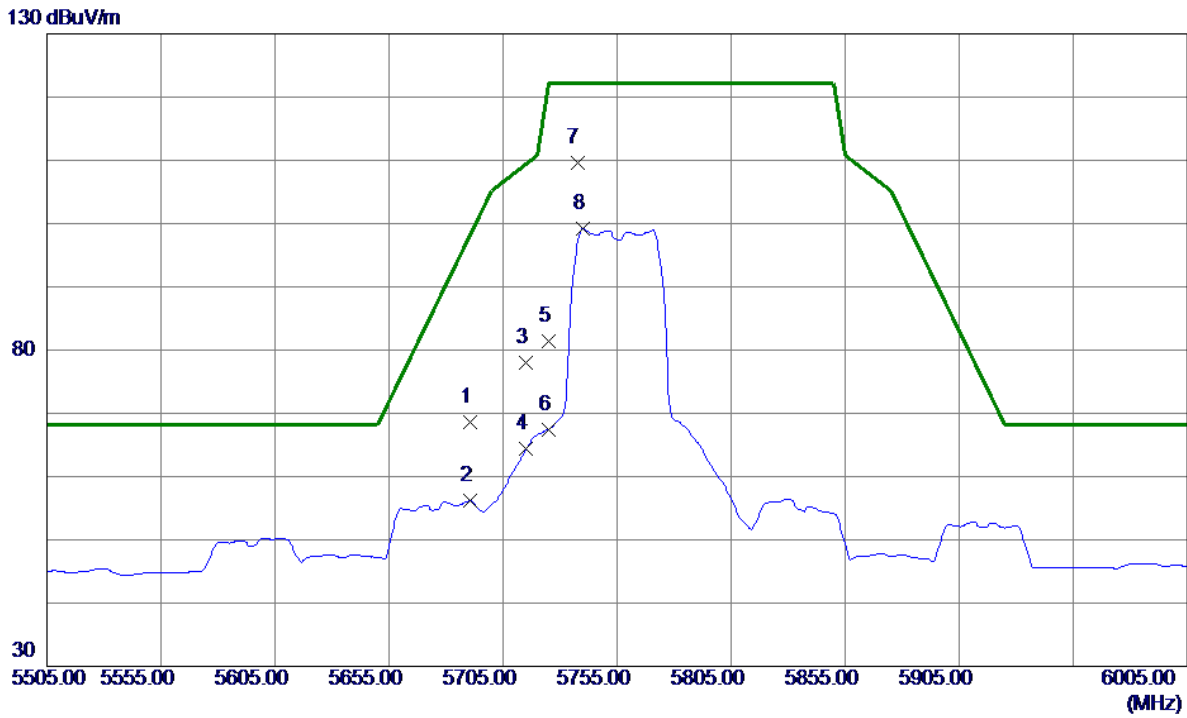


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5690.5000	25.22	43.46	68.68	98.17	-29.49	Peak	
2	5690.5000	12.76	43.46	56.22	98.17	-41.95	AVG	
3	5715.0000	34.39	43.53	77.92	109.40	-31.48	Peak	
4	5715.0000	20.80	43.53	64.33	109.40	-45.07	AVG	
5	5725.0000	37.82	43.56	81.38	122.20	-40.82	Peak	
6	5725.0000	23.93	43.56	67.49	122.20	-54.71	AVG	
7 *	5737.5000	66.01	43.60	109.61	122.20	-12.59	Peak	
8	5740.0000	55.58	43.60	99.18	122.20	-23.02	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz

Vertical


80 dBuV/m

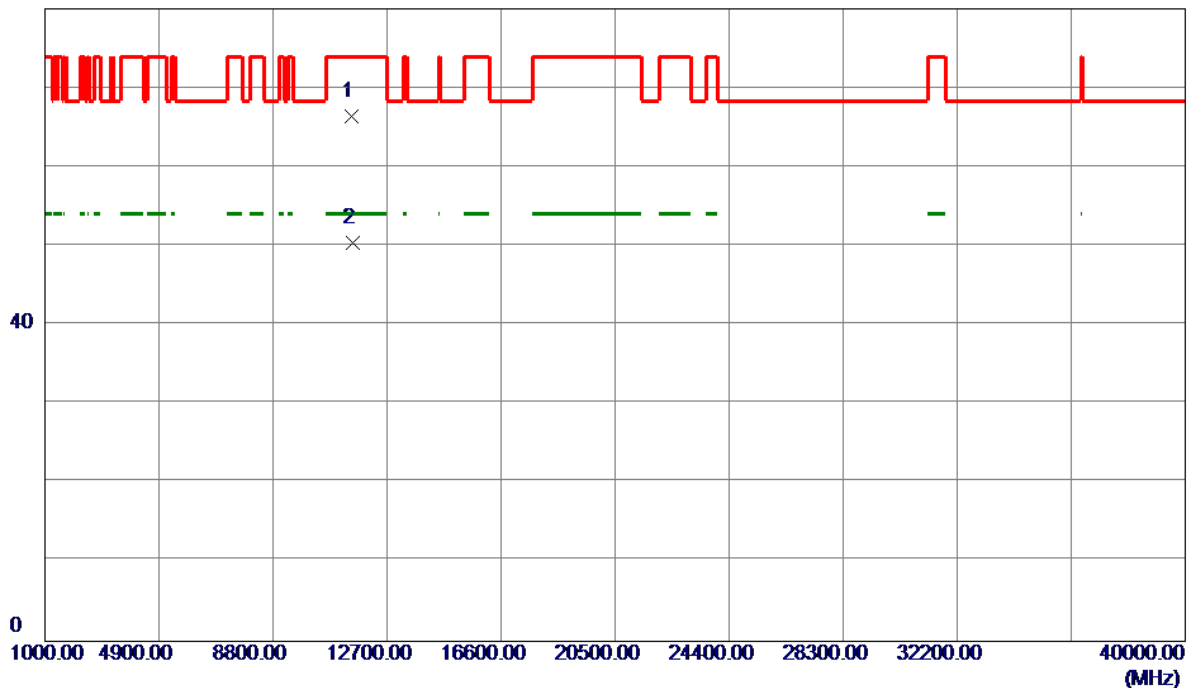

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11506.6000	48.65	17.79	66.44	74.00	-7.56	Peak	
2 *	11509.2000	32.64	17.79	50.43	54.00	-3.57	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Horizontal

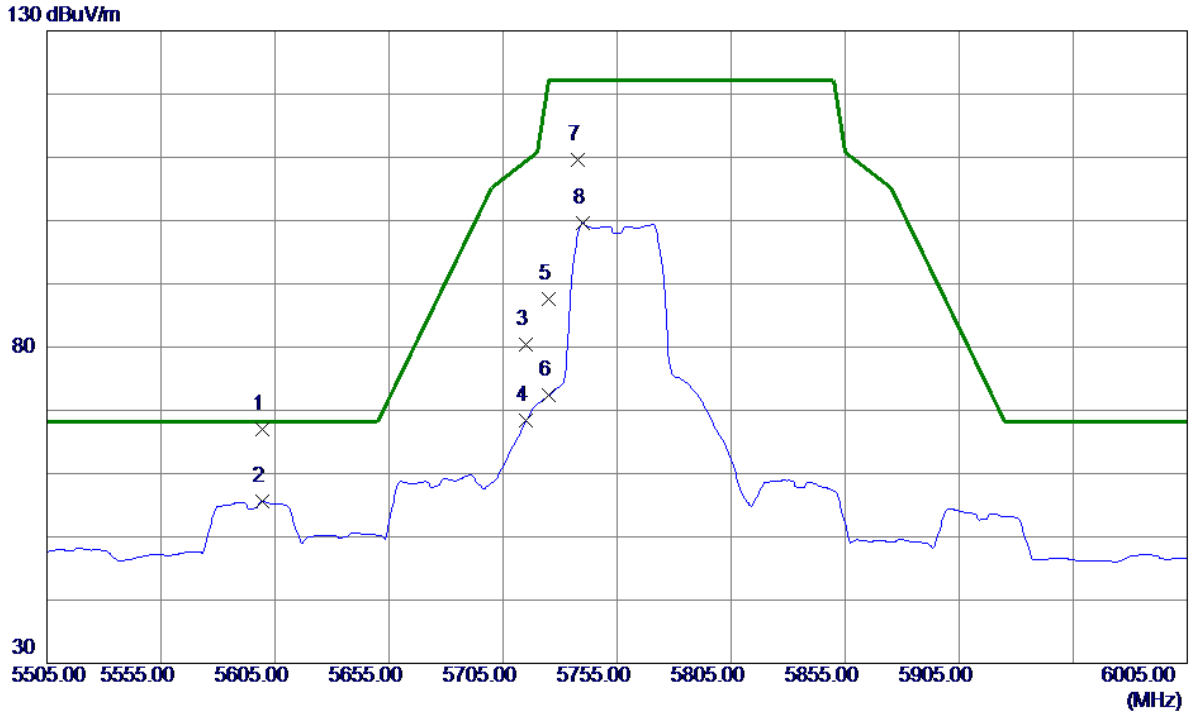

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5599.5000	23.84	43.18	67.02	68.20	-1.18	Peak	
2	5599.5000	12.36	43.18	55.54	68.20	-12.66	AVG	
3	5715.0000	36.92	43.53	80.45	109.40	-28.95	Peak	
4	5715.0000	24.84	43.53	68.37	109.40	-41.03	AVG	
5	5725.0000	44.04	43.56	87.60	122.20	-34.60	Peak	
6	5725.0000	28.79	43.56	72.35	122.20	-49.85	AVG	
7	5738.0000	65.98	43.60	109.58	122.20	-12.62	Peak	
8	5740.0000	56.00	43.60	99.60	122.20	-22.60	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Horizontal

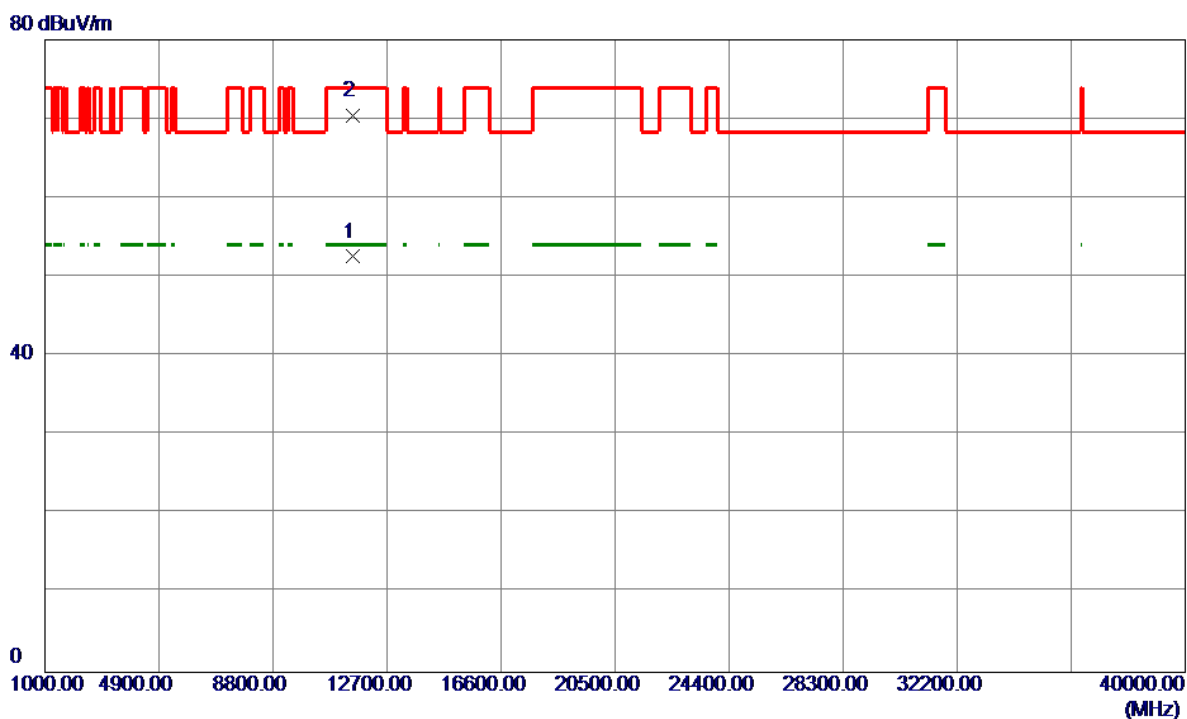

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11508.8000	34.77	17.79	52.56	54.00	-1.44	AVG	
2	11509.9000	52.62	17.79	70.41	74.00	-3.59	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz

Vertical

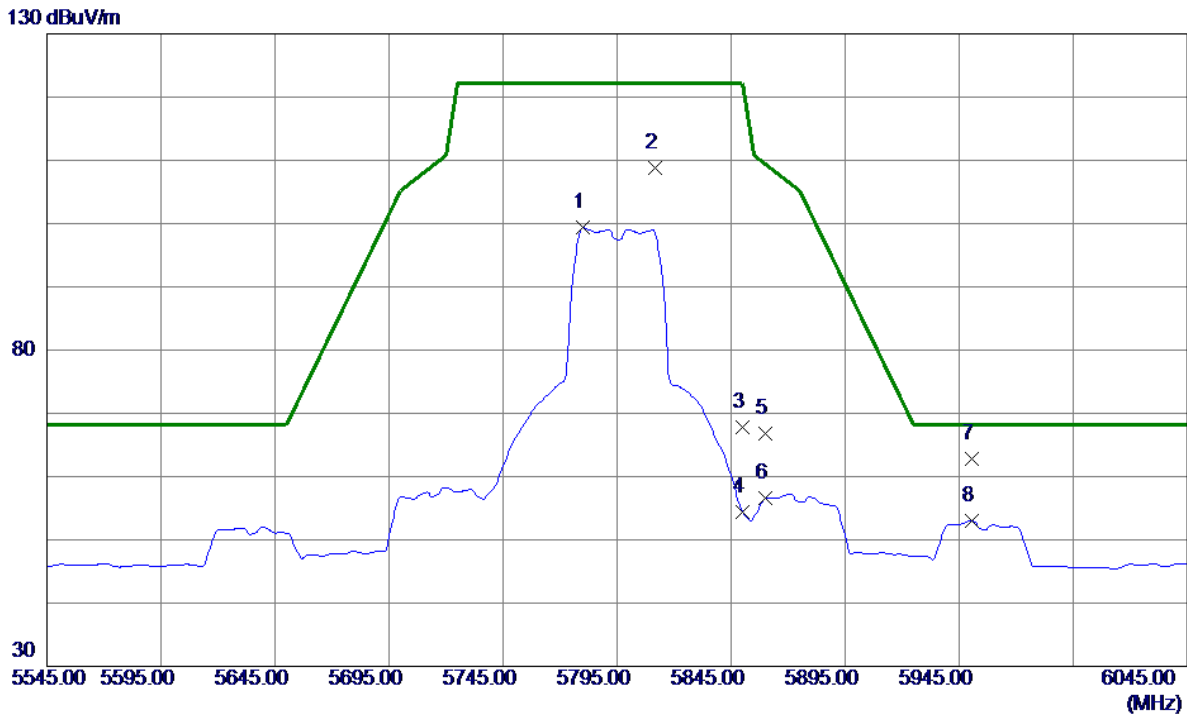


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5780.0000	55.63	43.73	99.36	122.20	-22.84	AVG	
2	5811.5000	65.07	43.82	108.89	122.20	-13.31	Peak	
3	5850.0000	23.80	43.94	67.74	122.20	-54.46	Peak	
4	5850.0000	10.50	43.94	54.44	122.20	-67.76	AVG	
5	5860.0000	22.85	43.97	66.82	109.40	-42.58	Peak	
6	5860.0000	12.60	43.97	56.57	109.40	-52.83	AVG	
7 *	5950.5000	18.48	44.24	62.72	68.20	-5.48	Peak	
8	5950.5000	8.72	44.24	52.96	68.20	-15.24	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz

Vertical


80 dBuV/m

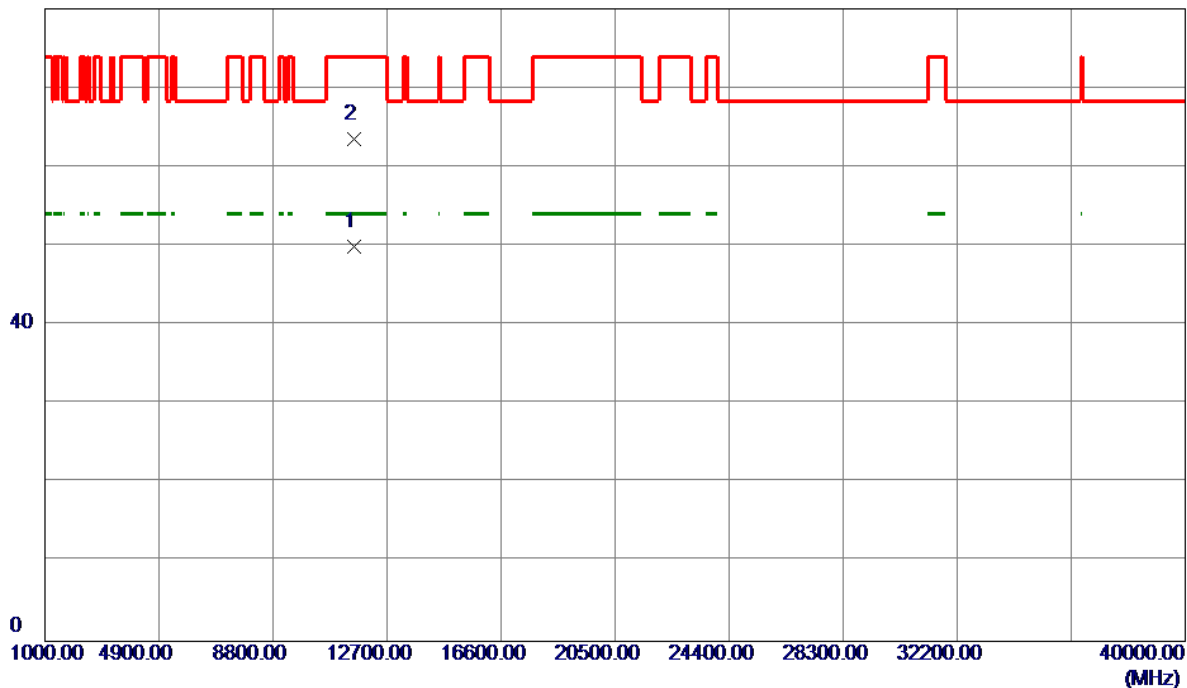

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11588.6000	32.06	17.83	49.89	54.00	-4.11	AVG	
2	11589.0000	45.66	17.83	63.49	74.00	-10.51	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz

Horizontal

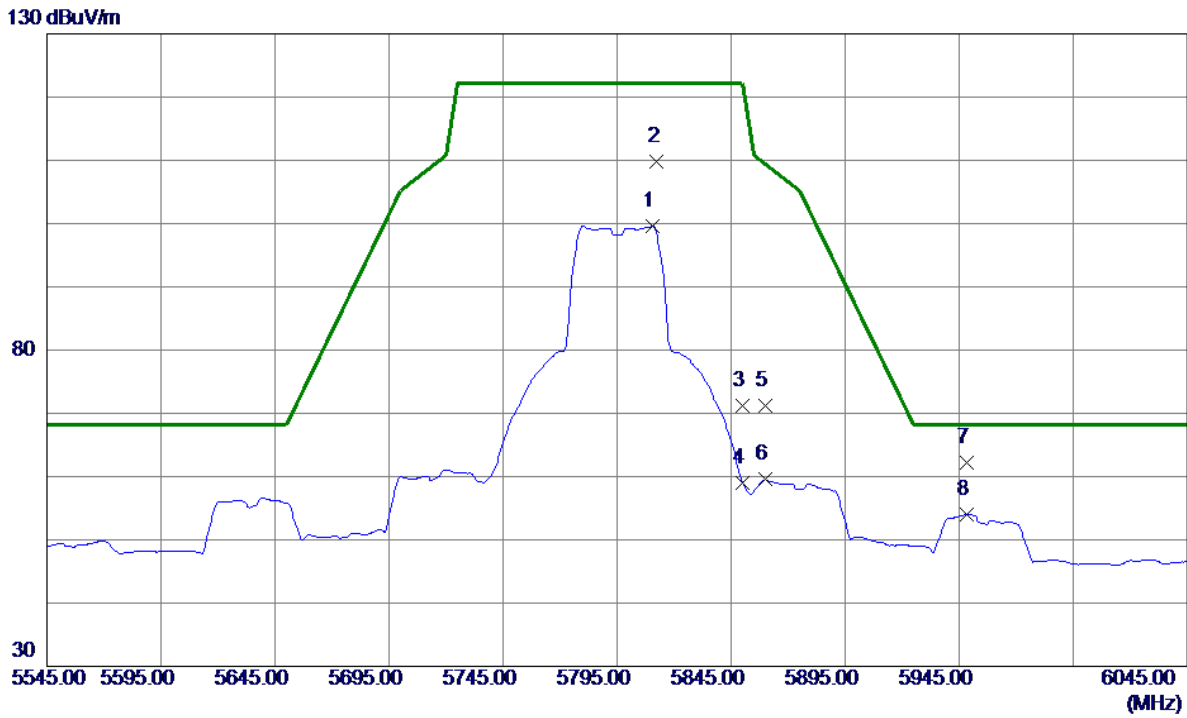


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5810.5000	55.78	43.82	99.60	122.20	-22.60	AVG	
2	5812.5000	65.93	43.82	109.75	122.20	-12.45	Peak	
3	5850.0000	27.34	43.94	71.28	122.20	-50.92	Peak	
4	5850.0000	15.12	43.94	59.06	122.20	-63.14	AVG	
5	5860.0000	27.23	43.97	71.20	109.40	-38.20	Peak	
6	5860.0000	15.54	43.97	59.51	109.40	-49.89	AVG	
7 *	5948.5000	18.02	44.23	62.25	68.20	-5.95	Peak	
8	5948.5000	9.82	44.23	54.05	68.20	-14.15	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz

Horizontal


80 dBuV/m

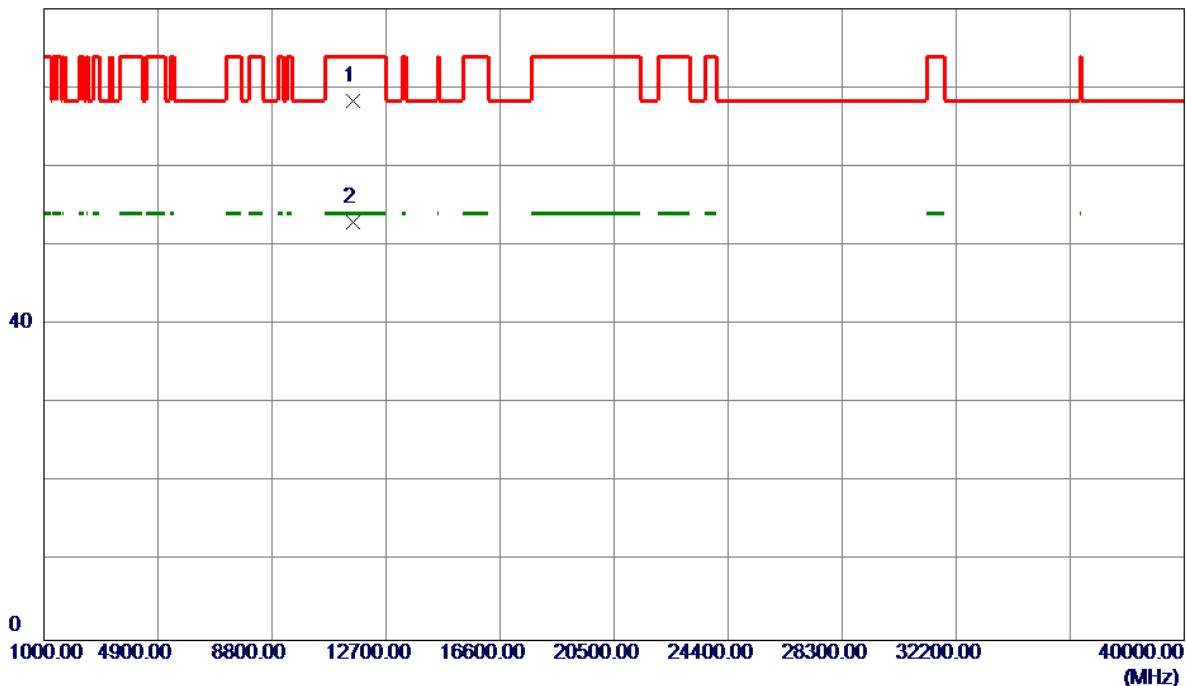

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11588.6000	50.52	17.83	68.35	74.00	-5.65	Peak	
2 *	11588.8000	35.14	17.83	52.97	54.00	-1.03	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Vertical

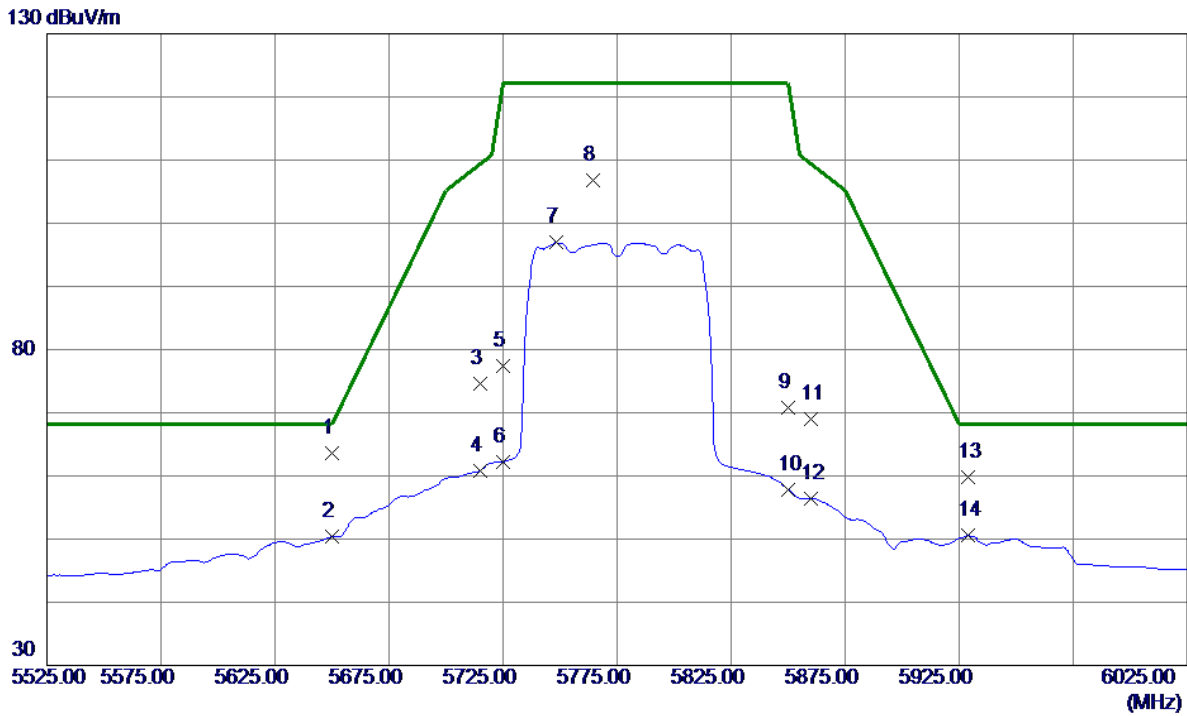


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5650.0000	20.36	43.33	63.69	68.20	-4.51	Peak	
2	5650.0000	7.10	43.33	50.43	68.20	-17.77	AVG	
3	5715.0000	31.03	43.53	74.56	109.40	-34.84	Peak	
4	5715.0000	17.33	43.53	60.86	109.40	-48.54	AVG	
5	5725.0000	33.75	43.56	77.31	122.20	-44.89	Peak	
6	5725.0000	18.69	43.56	62.25	122.20	-59.95	AVG	
7	5748.5000	53.28	43.63	96.91	122.20	-25.29	AVG	
8	5764.5000	63.13	43.68	106.81	122.20	-15.39	Peak	
9	5850.0000	26.87	43.94	70.81	122.20	-51.39	Peak	
10	5850.0000	13.88	43.94	57.82	122.20	-64.38	AVG	
11	5860.0000	24.94	43.97	68.91	109.40	-40.49	Peak	
12	5860.0000	12.44	43.97	56.41	109.40	-52.99	AVG	
13	5929.0000	15.68	44.18	59.86	68.20	-8.34	Peak	
14	5929.0000	6.35	44.18	50.53	68.20	-17.67	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Vertical


80 dBuV/m

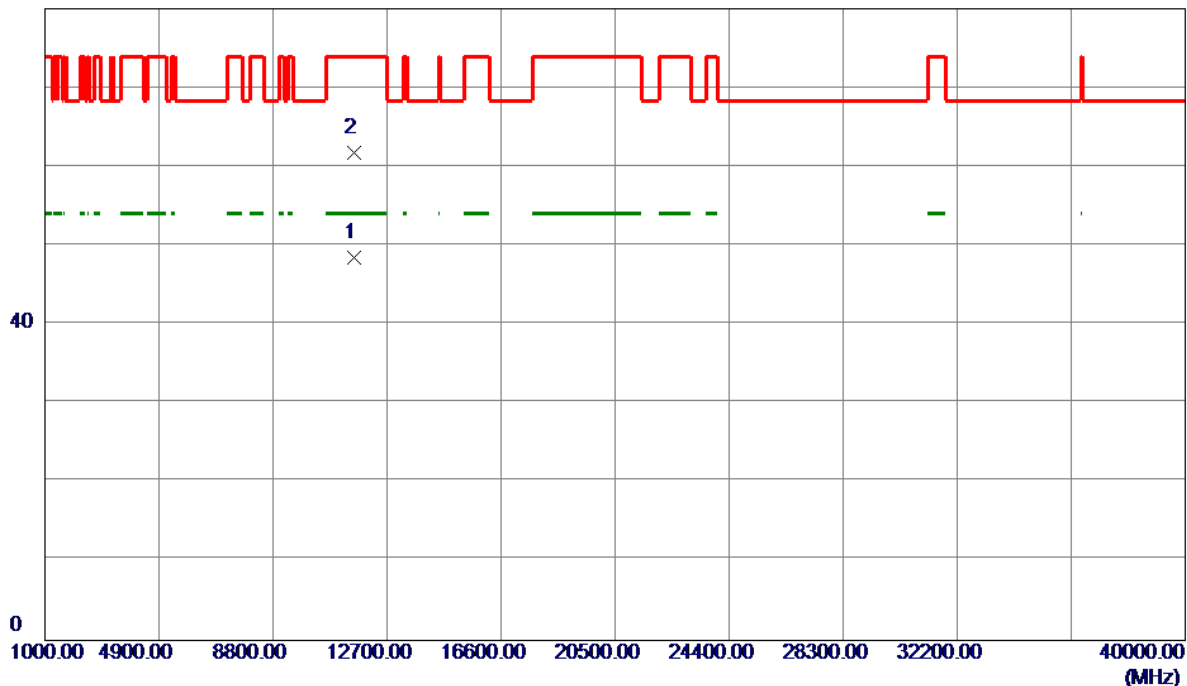

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11559.1000	30.70	17.81	48.51	54.00	-5.49	AVG	
2	11578.8000	43.95	17.82	61.77	74.00	-12.23	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


Horizontal

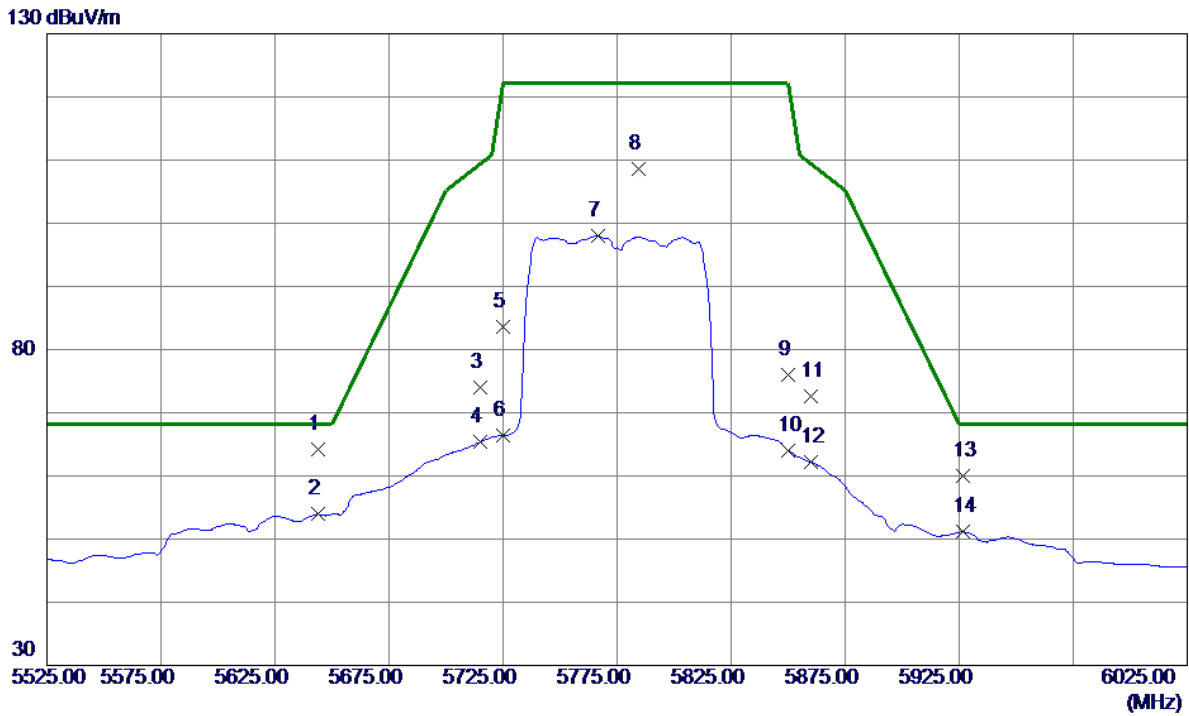

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5644.0000	20.81	43.31	64.12	68.20	-4.08	Peak	
2	5644.0000	10.61	43.31	53.92	68.20	-14.28	AVG	
3	5715.0000	30.52	43.53	74.05	109.40	-35.35	Peak	
4	5715.0000	21.86	43.53	65.39	109.40	-44.01	AVG	
5	5725.0000	39.99	43.56	83.55	122.20	-38.65	Peak	
6	5725.0000	22.90	43.56	66.46	122.20	-55.74	AVG	
7	5766.5000	54.30	43.68	97.98	122.20	-24.22	AVG	
8	5784.5000	64.95	43.74	108.69	122.20	-13.51	Peak	
9	5850.0000	32.15	43.94	76.09	122.20	-46.11	Peak	
10	5850.0000	20.12	43.94	64.06	122.20	-58.14	AVG	
11	5860.0000	28.68	43.97	72.65	109.40	-36.75	Peak	
12	5860.0000	18.20	43.97	62.17	109.40	-47.23	AVG	
13	5926.5000	15.90	44.17	60.07	68.20	-8.13	Peak	
14	5926.5000	6.98	44.17	51.15	68.20	-17.05	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


Horizontal

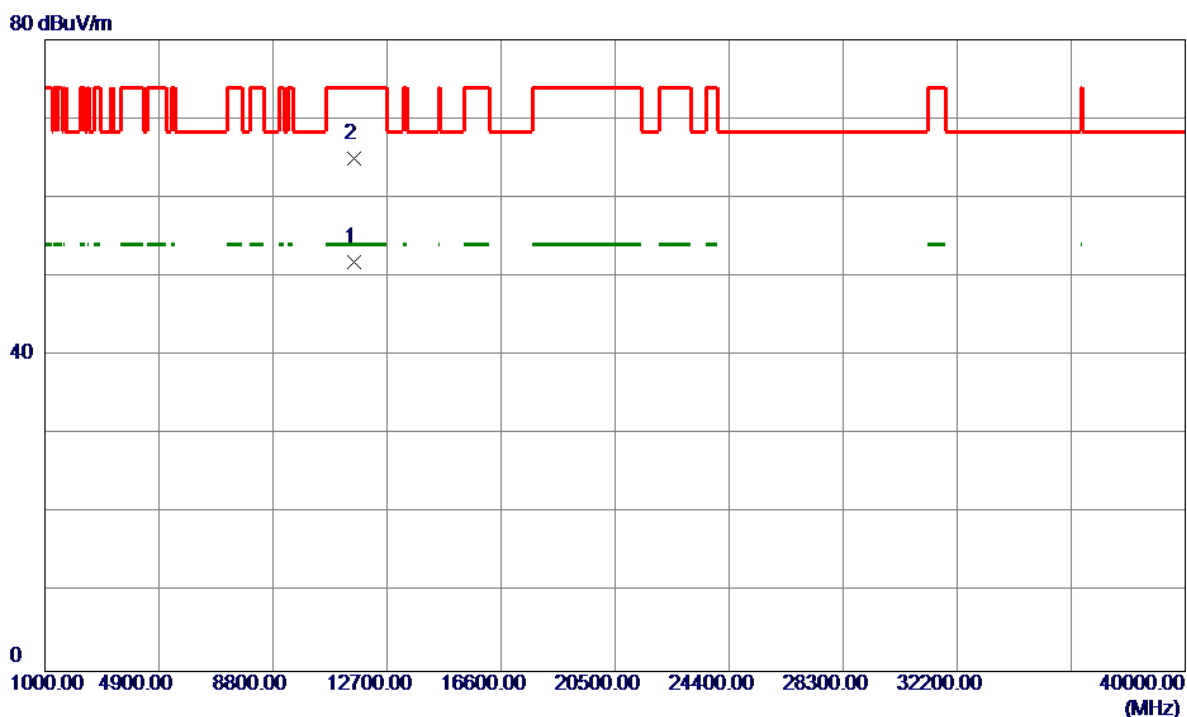

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11559.1000	33.99	17.81	51.80	54.00	-2.20	AVG	
2	11568.6000	47.08	17.82	64.90	74.00	-9.10	Peak	


For Model: MG7700XY with adapter: S36B52-120A250-04)

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz

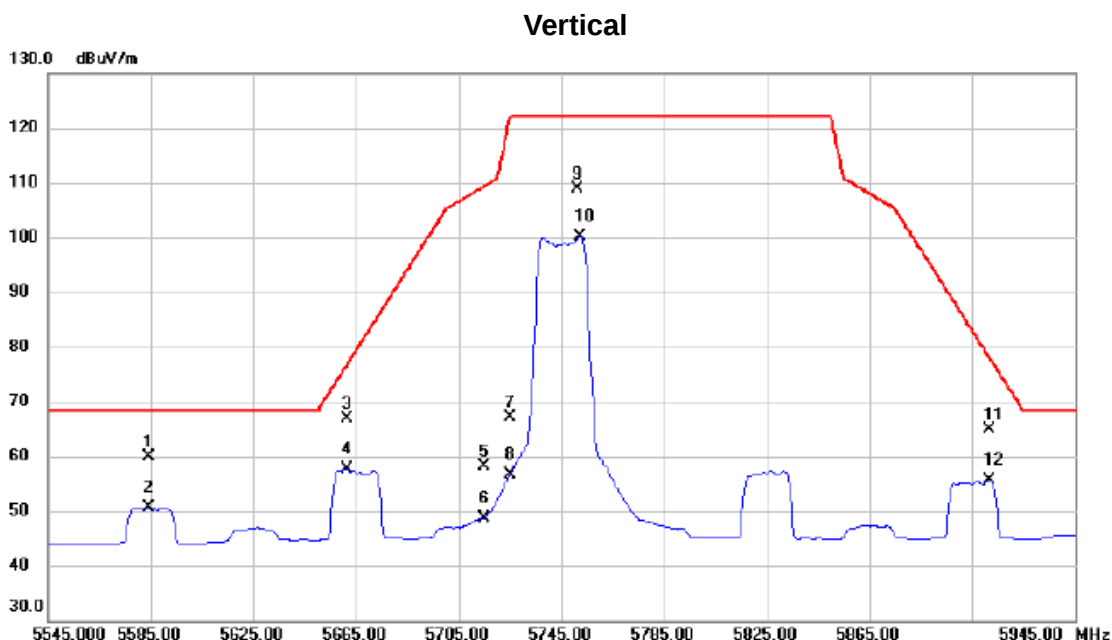

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5584.200	16.81	43.14	59.95	68.30	-8.35	peak	
2		5584.200	7.42	43.14	50.56	68.30	-17.74	AVG	
3		5661.400	23.43	43.37	66.80	76.71	-9.91	peak	
4		5661.400	14.17	43.37	57.54	76.71	-19.17	AVG	
5		5715.000	14.59	43.53	58.12	109.40	-51.28	peak	
6		5715.000	5.20	43.53	48.73	109.40	-60.67	AVG	
7		5725.000	23.49	43.55	67.04	122.20	-55.16	peak	
8		5725.000	13.19	43.55	56.74	122.20	-65.46	AVG	
9		5751.000	65.16	43.64	108.80	122.20	-13.40	peak	
10		5752.200	56.40	43.64	100.04	122.20	-22.16	AVG	
11		5911.800	20.74	44.13	64.87	78.04	-13.17	peak	
12		5911.800	11.59	44.13	55.72	78.04	-22.32	AVG	


Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz

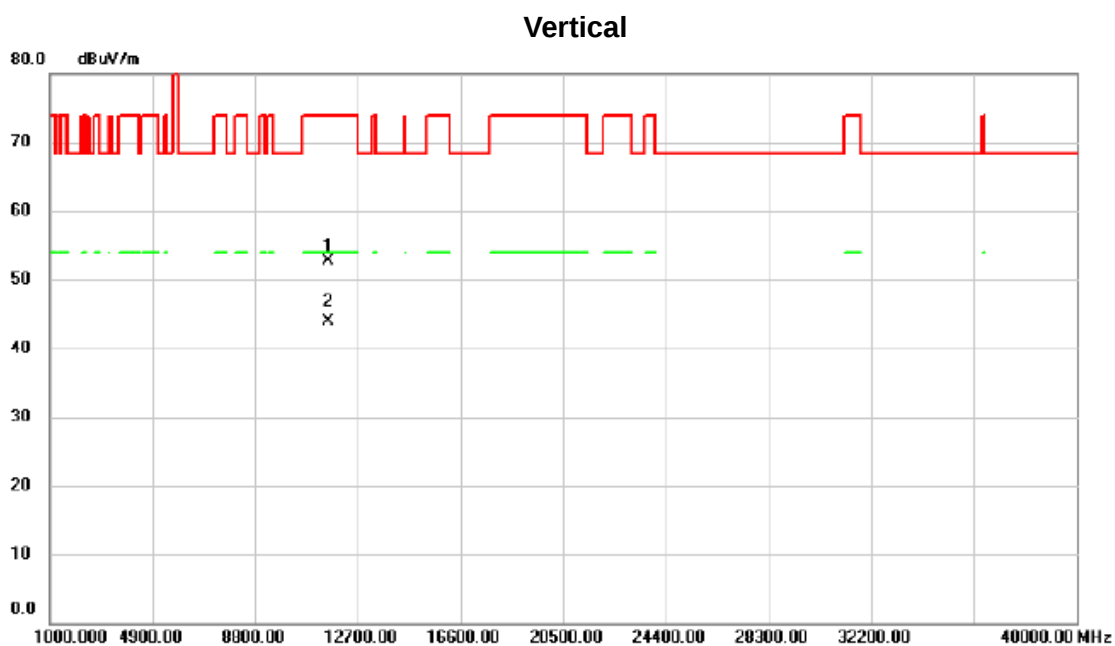

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11581.000	34.96	17.83	52.79	74.00	-21.21	peak	
2	*	11591.100	26.03	17.84	43.87	54.00	-10.13	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz


Horizontal

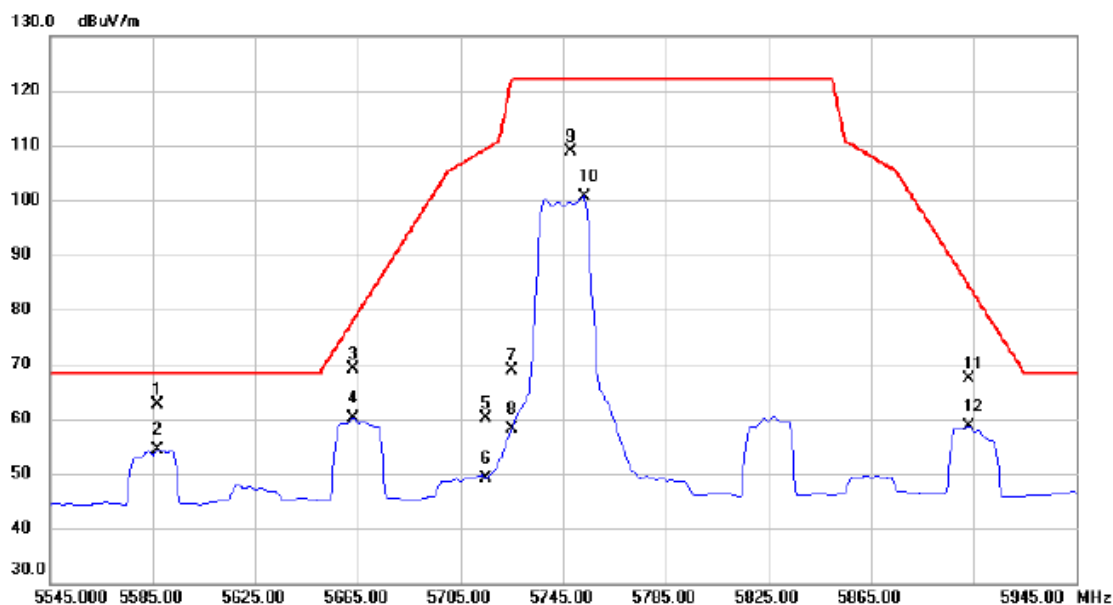

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5587.000	19.56	43.14	62.70	68.30	-5.60	peak	
2		5587.000	11.28	43.14	54.42	68.30	-13.88	AVG	
3		5663.400	25.75	43.37	69.12	78.19	-9.07	peak	
4		5663.400	16.82	43.37	60.19	78.19	-18.00	AVG	
5		5715.000	16.60	43.53	60.13	109.40	-49.27	peak	
6		5715.000	5.66	43.53	49.19	109.40	-60.21	AVG	
7		5725.000	25.42	43.55	68.97	122.20	-53.23	peak	
8		5725.000	14.67	43.55	58.22	122.20	-63.98	AVG	
9		5747.800	65.17	43.63	108.80	122.20	-13.40	peak	
10		5753.000	57.10	43.65	100.75	122.20	-21.45	AVG	
11		5903.400	23.16	44.10	67.26	84.24	-16.98	peak	
12		5903.400	14.59	44.10	58.69	84.24	-25.55	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz

Horizontal

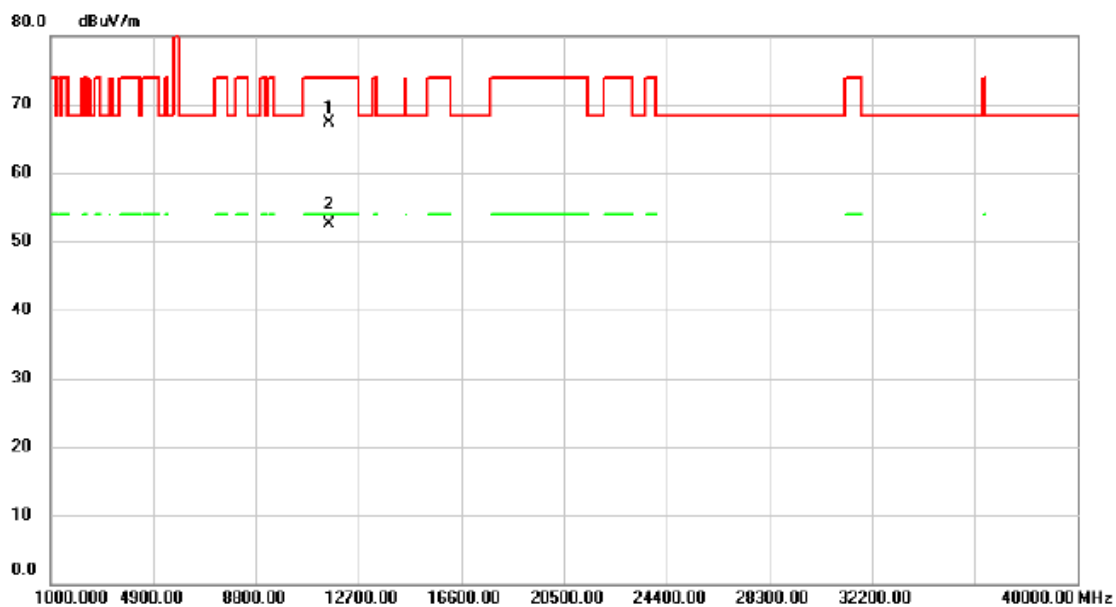

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11588.700	49.46	17.83	67.29	74.00	-6.71	peak	
2	*	11588.800	34.72	17.83	52.55	54.00	-1.45	AVG	

TX A Mode_DUTY CYCLE

Duty cycle: TX DUTYMHz

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 2.06 msec

T_{Total} : 2.18 msec

Duty cycle: 94.50%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.25

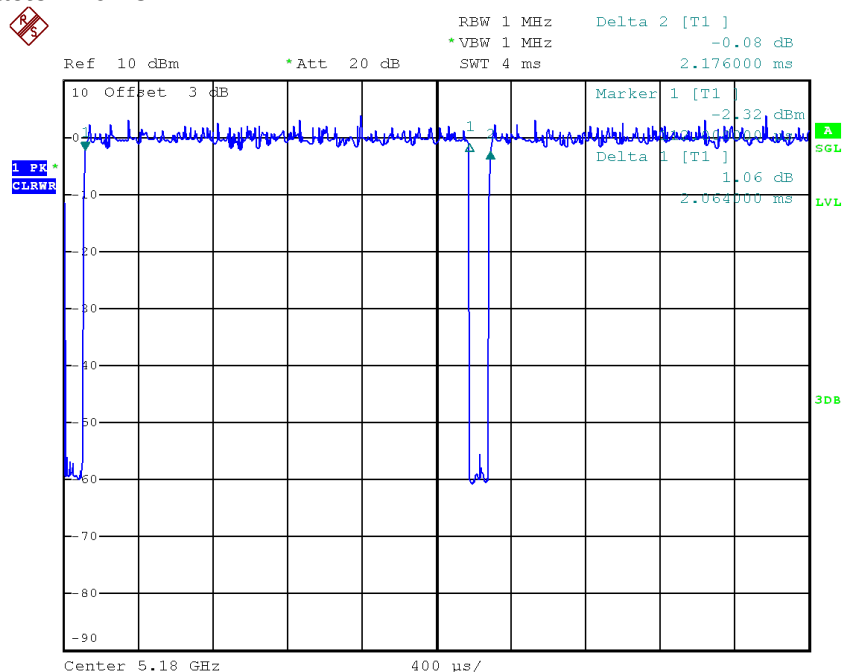

Date: 5.DEC.2017 14:40:28

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be caculated as

Output Power = Measured power + Ducus factor

Power Spectral Density = Measured density + Duty factor

TX N20 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHz

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 0.68 msec

T_{Total} : 0.78 msec

Duty cycle: 87.18%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.60

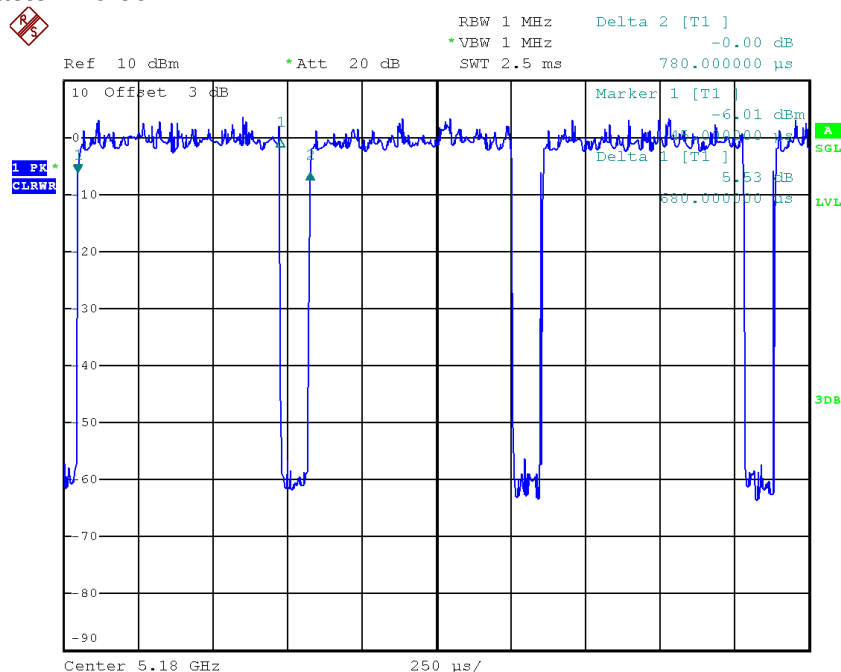

Date: 5.DEC.2017 14:41:08

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be caculated as

Output Power = Measured power + Ducus factor

Power Spectral Density = Measured density + Duty factor

TX N40 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHz

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 0.33 msec

T_{Total} : 0.46 msec

Duty cycle: 71.74%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 1.44

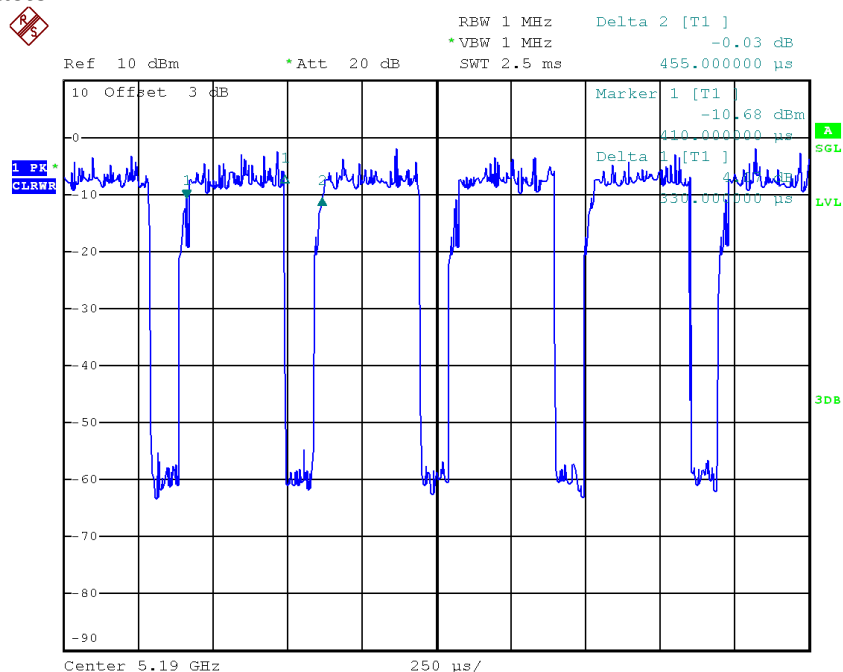

Date: 5.DEC.2017 14:42:31

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be caculated as

Output Power = Measured power + Ducus factor

Power Spectral Density = Measured density + Duty factor

TX AC20 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHz

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 0.68 msec

T_{Total} : 0.72 msec

Duty cycle: 94.44%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.25

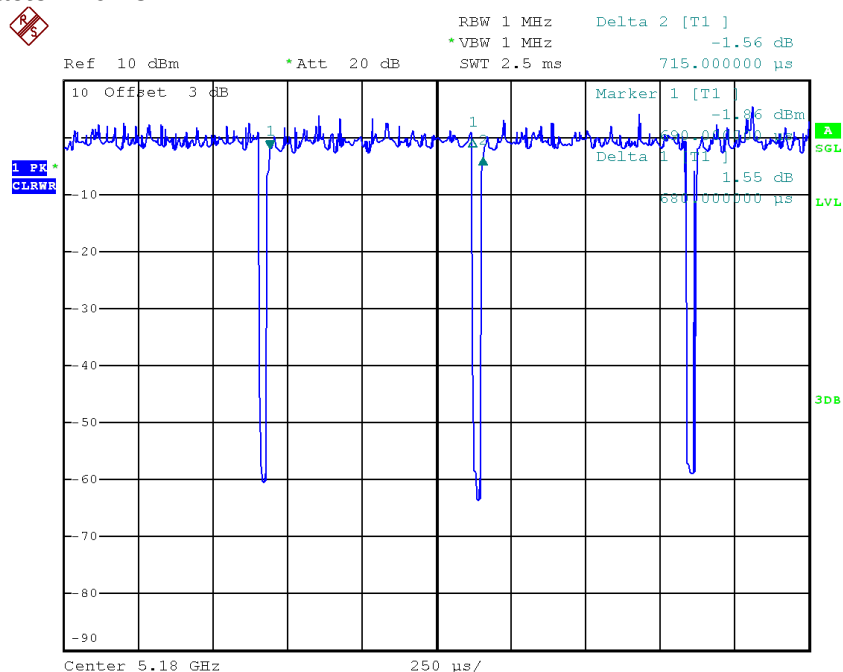

Date: 5.DEC.2017 14:41:47

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be caculated as

Output Power = Measured power + Ducus factor

Power Spectral Density = Measured density + Duty factor

TX AC40 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHz

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 0.34 msec

T_{Total} : 0.38 msec

Duty cycle: 89.47%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.48

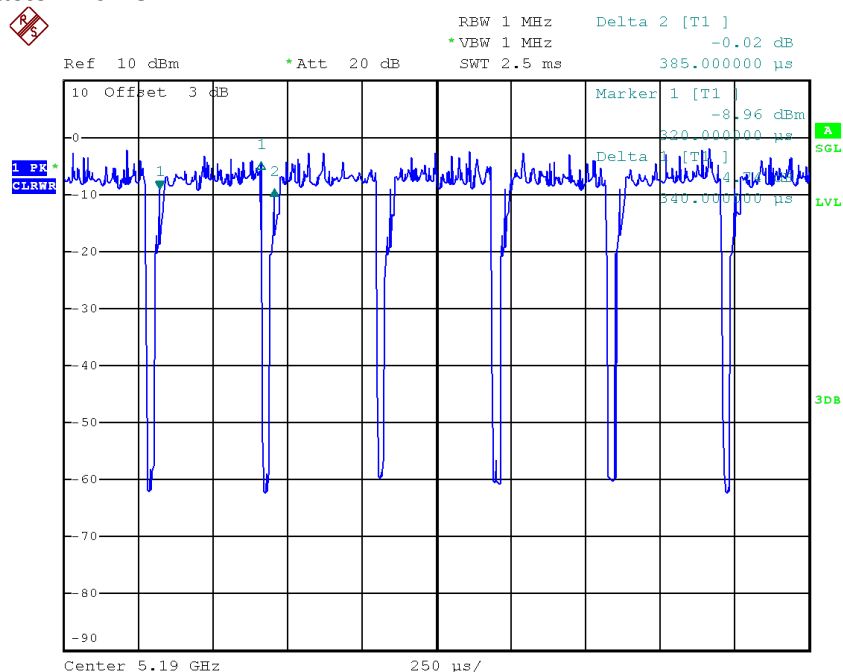

Date: 5.DEC.2017 14:43:00

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be caculated as

Output Power = Measured power + Ducus factor

Power Spectral Density = Measured density + Duty factor

TX AC80 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 0.16 msec

T_{Total} : 0.22 msec

Duty cycle: 72.73%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 1.38

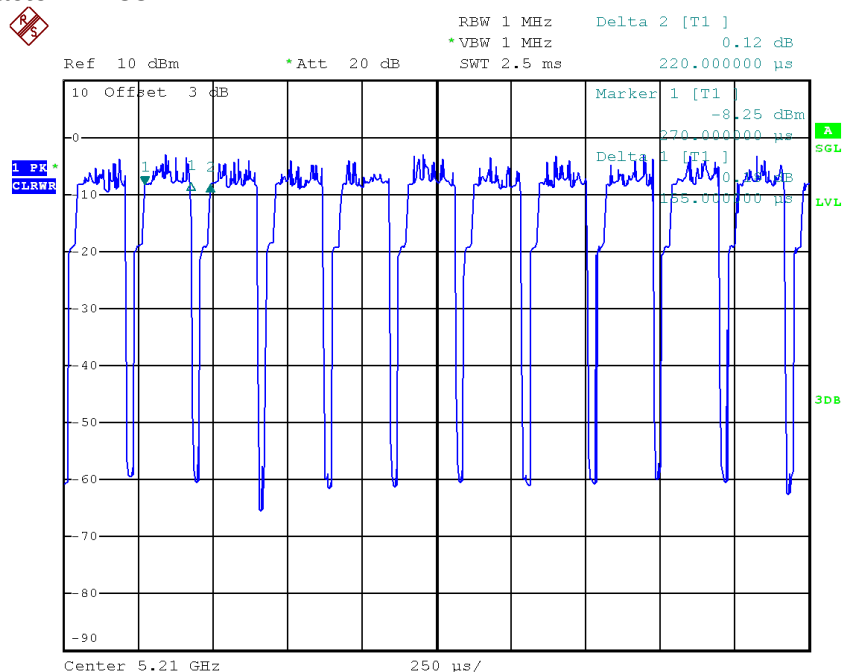

Date: 5.DEC.2017 14:49:12

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be caculated as

Output Power = Measured power + Ducus factor

Power Spectral Density = Measured density + Duty factor


APPENDIX E - BANDWIDTH

Non-Beamforming

Test Mode: UNII-1/TX A Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	20.55	17.00
CH40	5200	20.49	17.00
CH48	5240	20.45	17.00

TX CH36

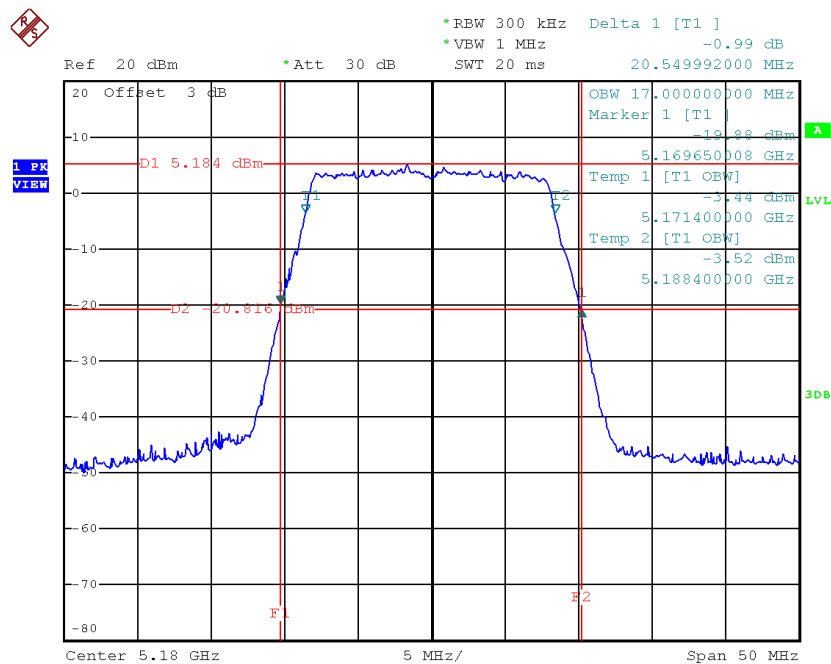


Date: 5.DEC.2017 14:35:07

TX CH40

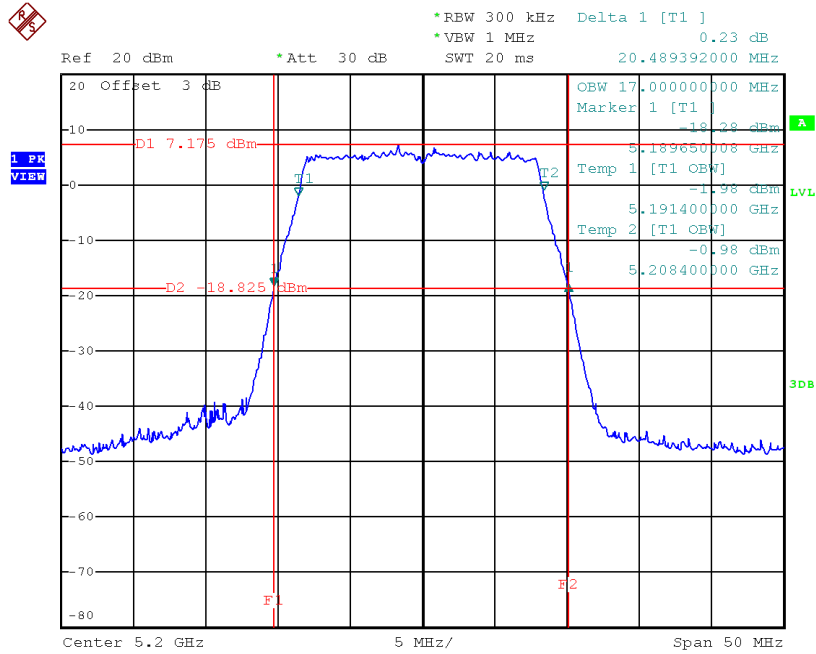

Date: 5.DEC.2017 14:36:17

TX CH48

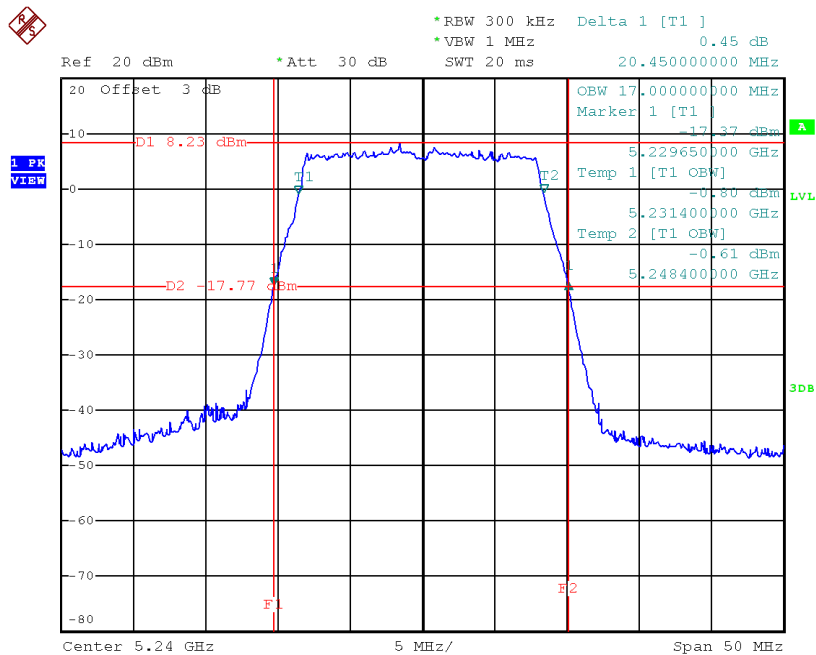


Date: 5.DEC.2017 14:37:16

Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	20.79	18.00
CH40	5200	20.69	18.10
CH48	5240	21.05	18.00

TX CH36

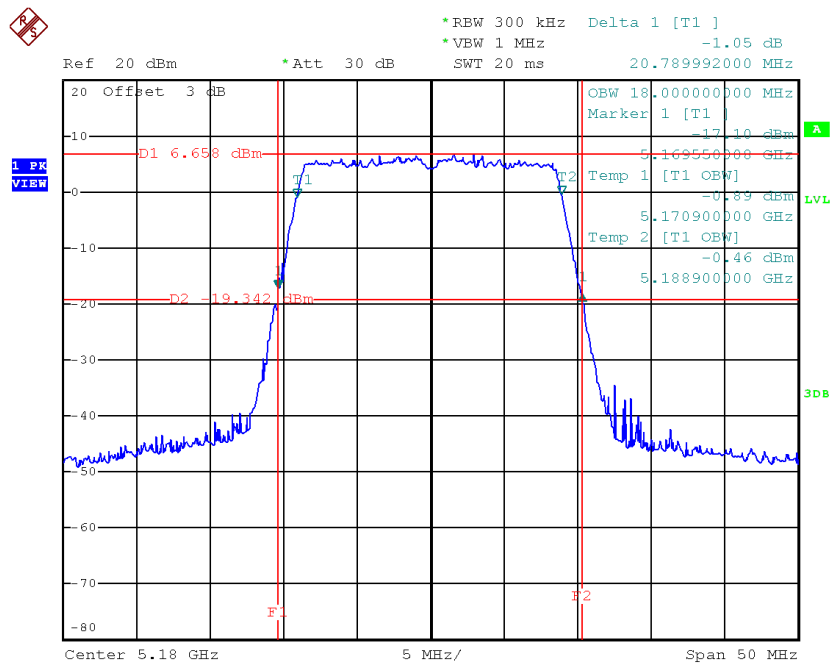


Date: 5.DEC.2017 15:12:54

TX CH40

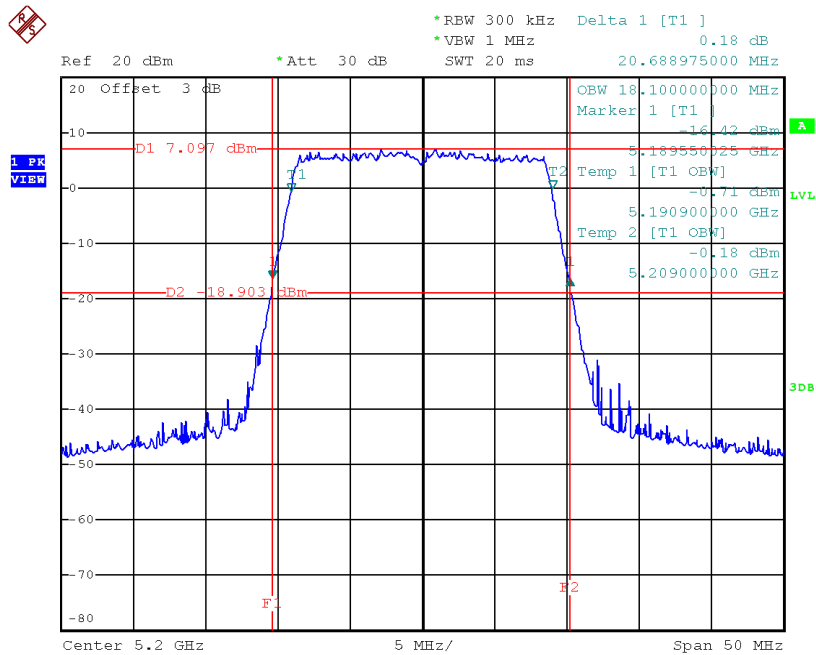

Date: 5.DEC.2017 15:13:55

TX CH48

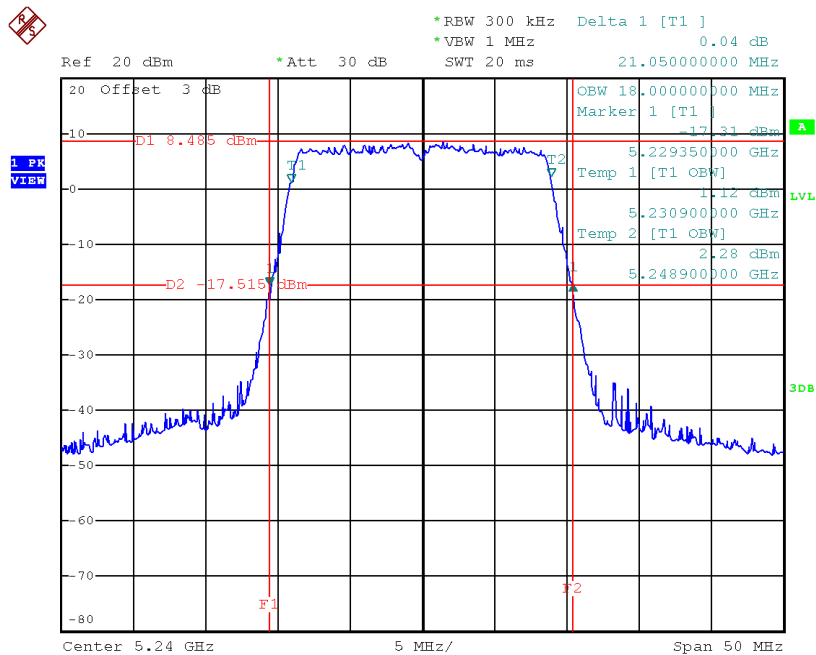


Date: 5.DEC.2017 15:15:13

Test Mode: UNII-1/TX N40 Mode_CH38/CH46


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	41.30	36.80
CH46	5230	41.50	37.00

TX CH38

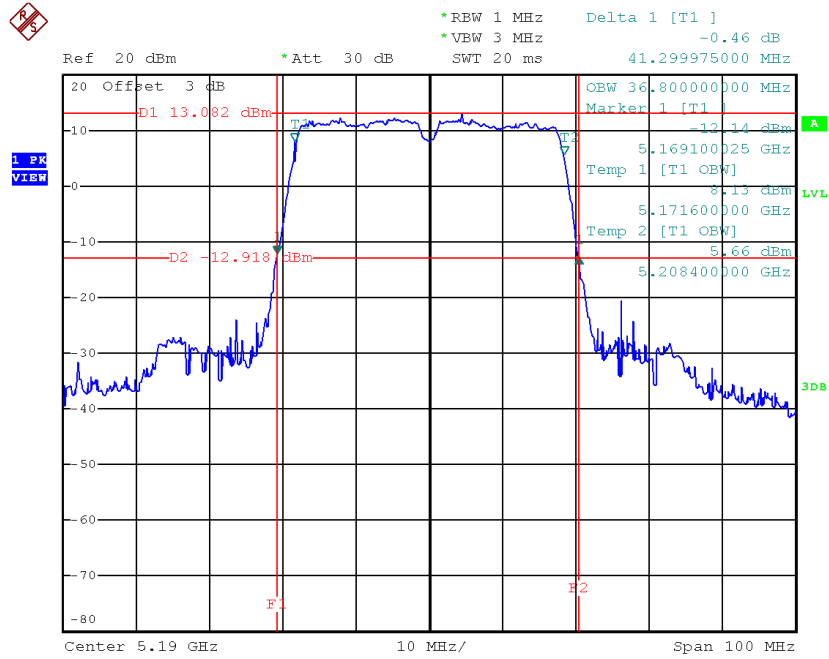

Date: 5.DEC.2017 15:54:54

TX CH46

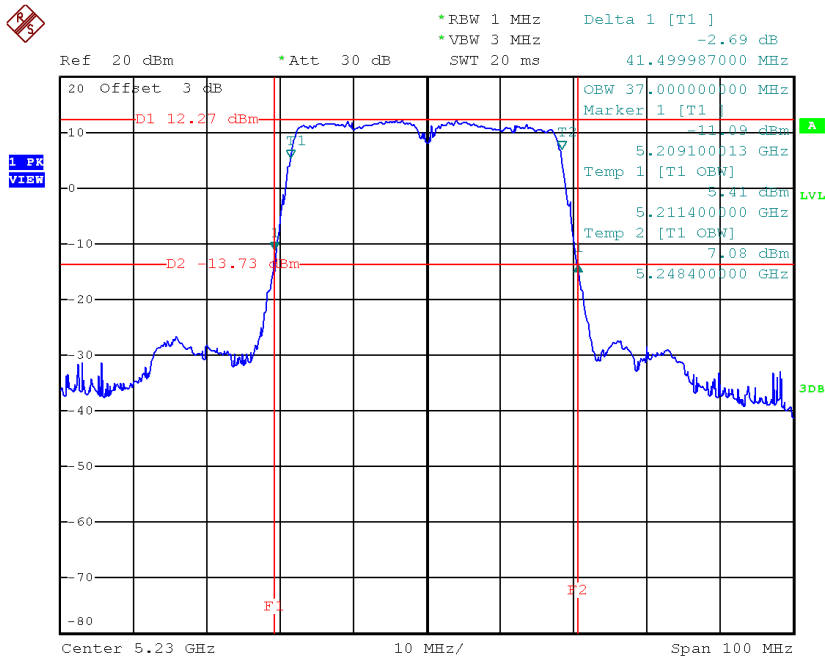


Date: 5.DEC.2017 15:55:54

Test Mode: UNII-3/ TX A Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	16.41	16.60	>=500
CH157	5785	16.50	16.60	>=500
CH165	5825	16.50	16.60	>=500

TX CH 149

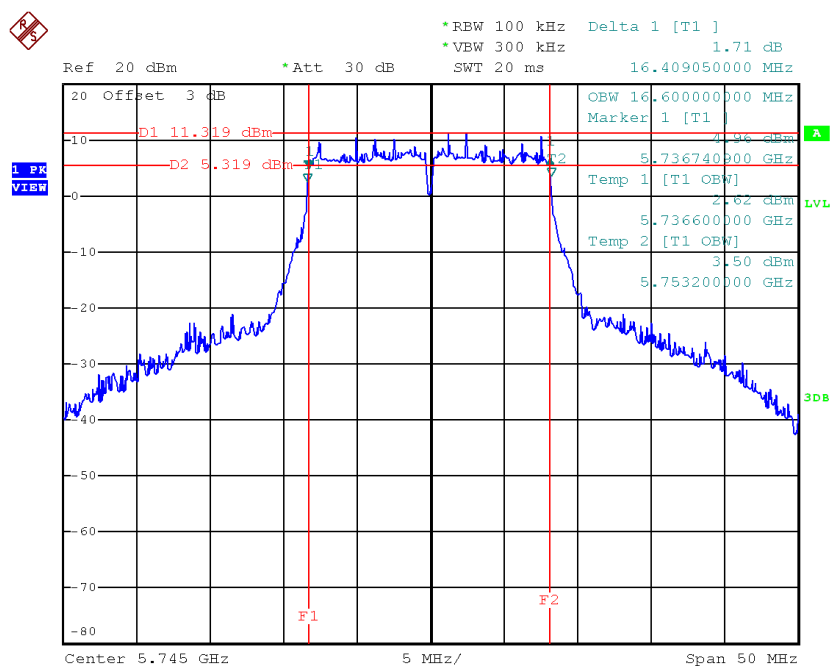


Date: 5.DEC.2017 14:58:10

TX CH 157

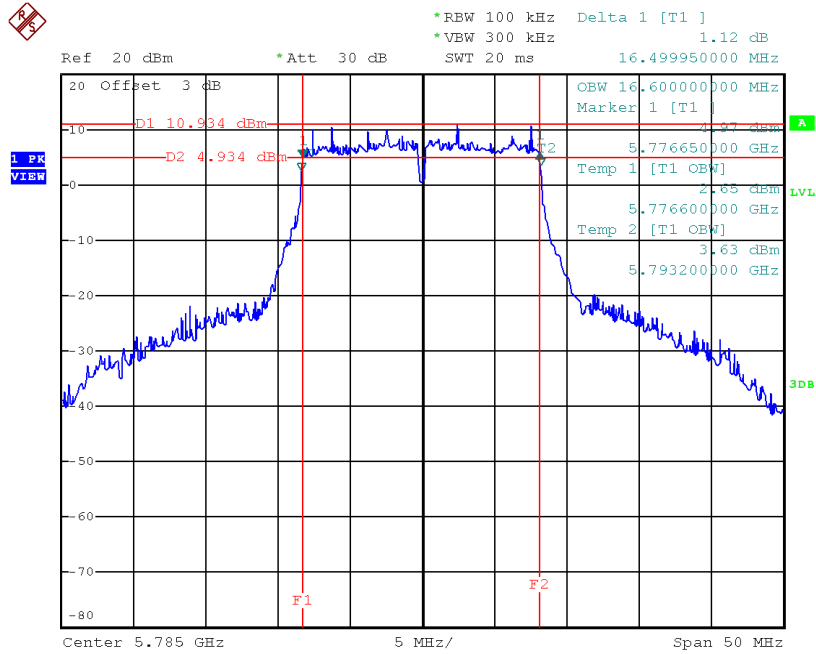

Date: 5.DEC.2017 15:00:52

TX CH 165

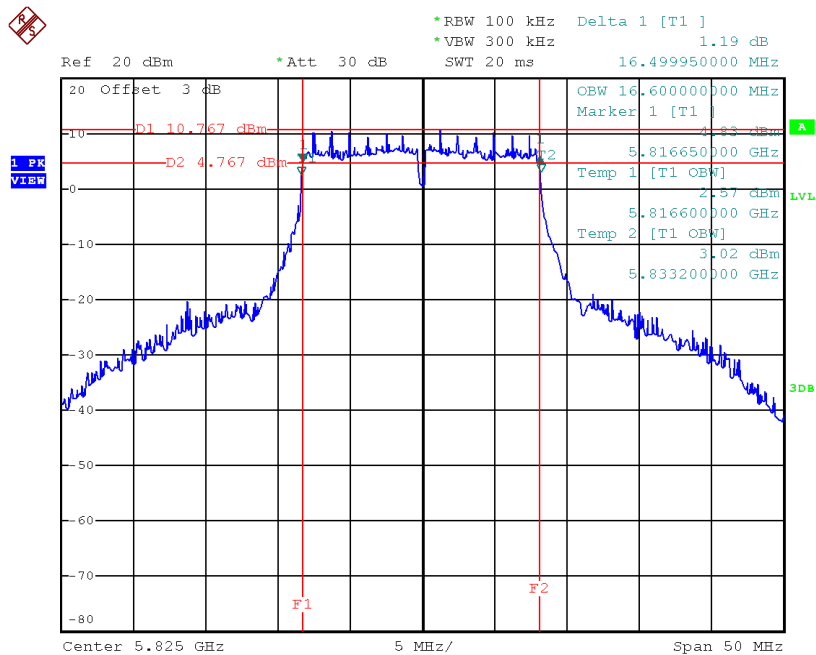


Date: 5.DEC.2017 15:01:51

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.70	17.70	>=500
CH157	5785	17.75	17.70	>=500
CH165	5825	17.65	17.70	>=500

TX CH 149

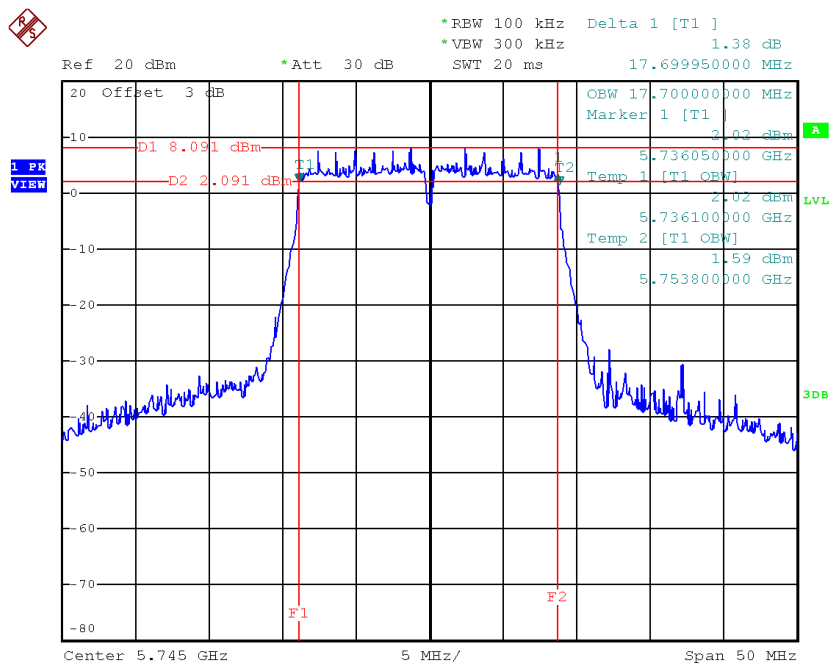


Date: 5.DEC.2017 15:17:06

TX CH 157

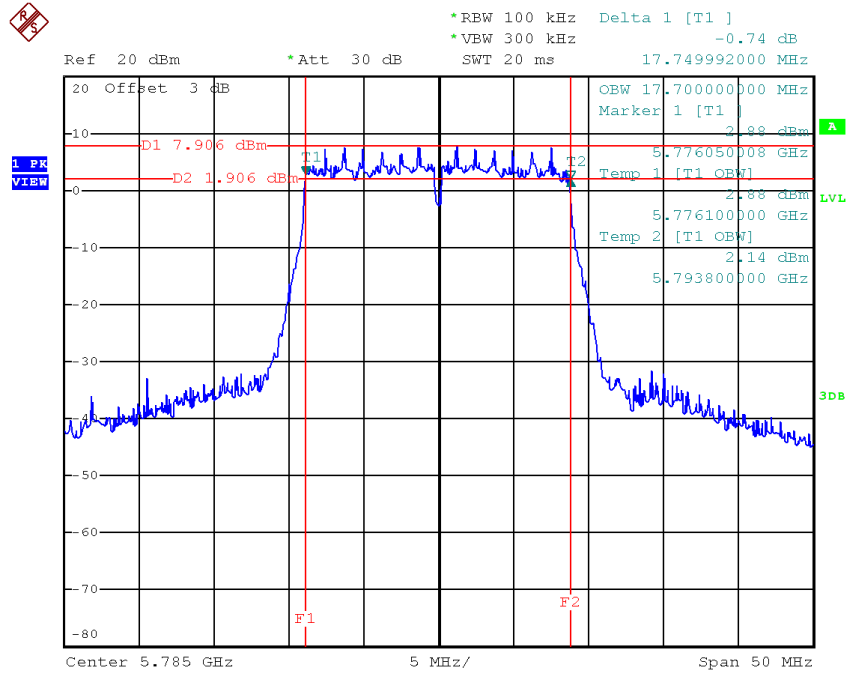

Date: 5.DEC.2017 15:19:07

TX CH 165

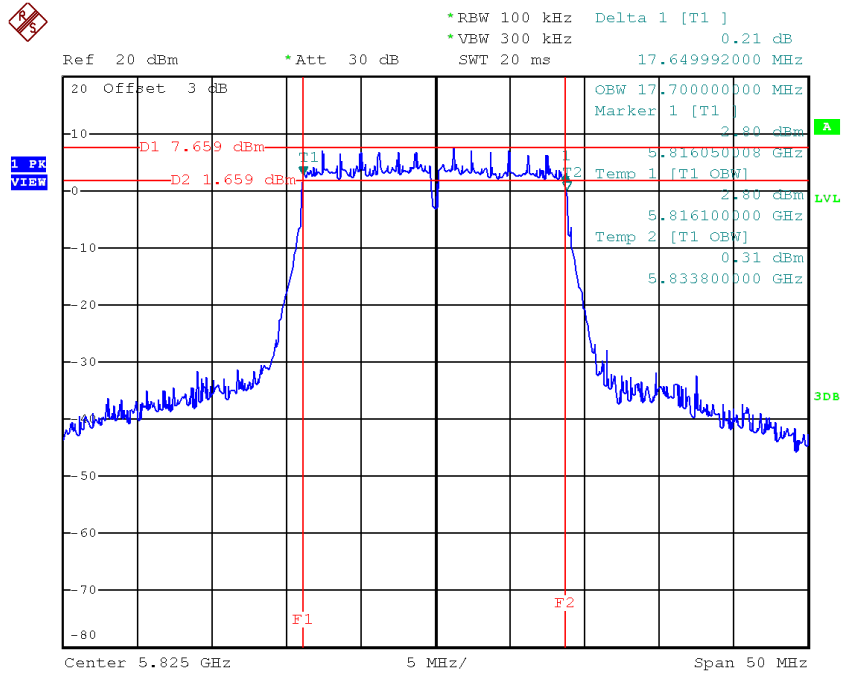


Date: 5.DEC.2017 15:20:05

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	36.20	36.40	≥ 500
CH159	5795	36.50	36.40	≥ 500

TX CH 151

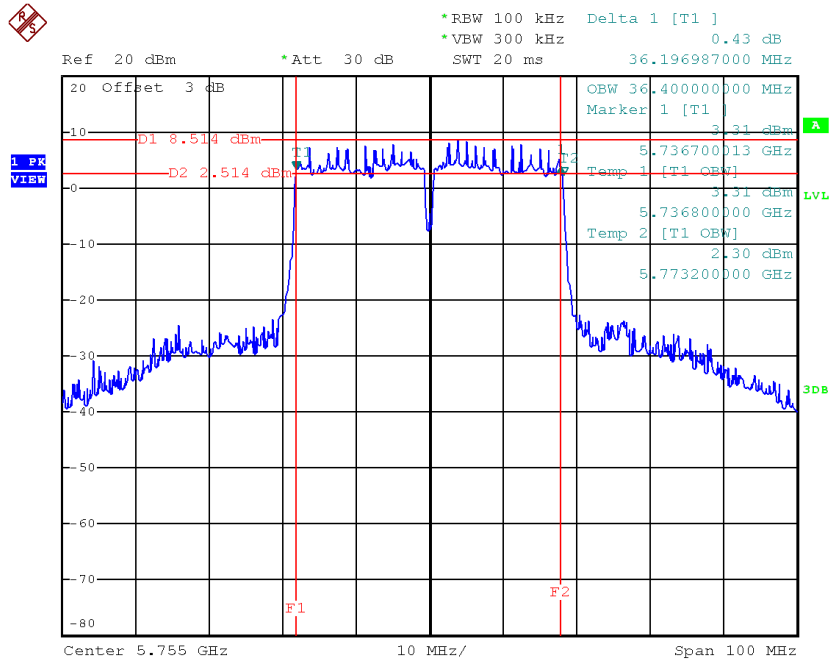

Date: 5.DEC.2017 15:57:11

TX CH 159

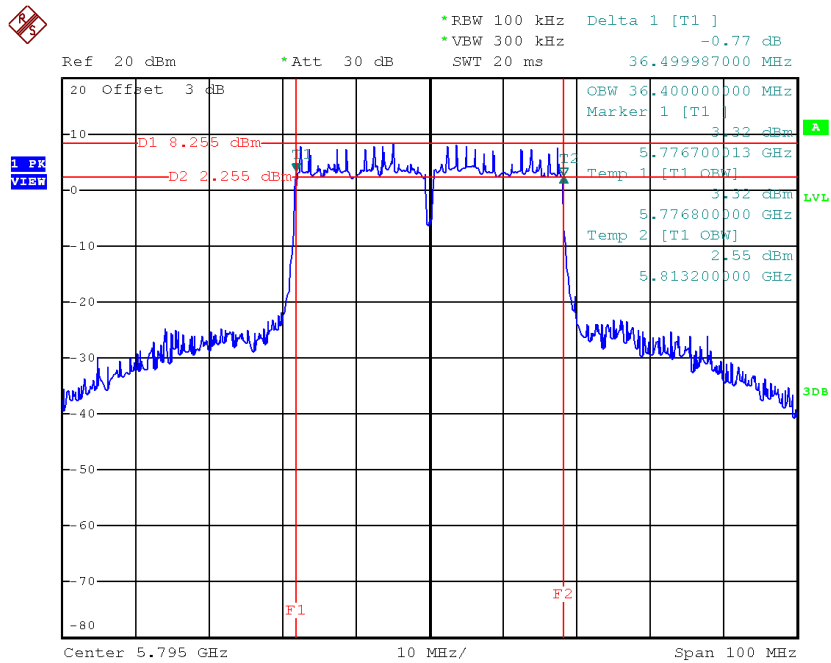


Date: 5.DEC.2017 15:58:22

Test Mode: UNII-1/TX AC20 Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	20.75	18.00
CH40	5200	20.95	18.10
CH48	5240	20.69	18.10

TX CH36

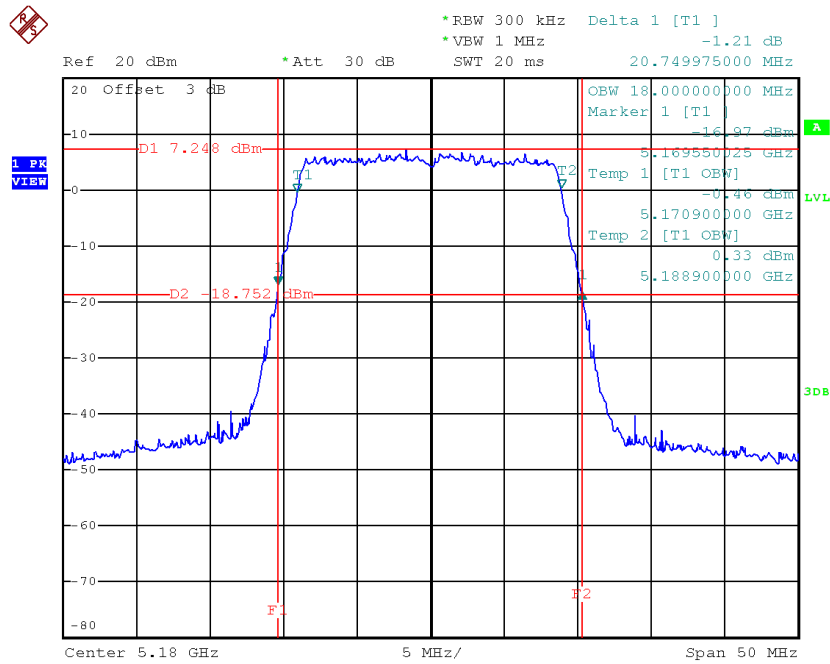


Date: 5.DEC.2017 15:46:54

TX CH40

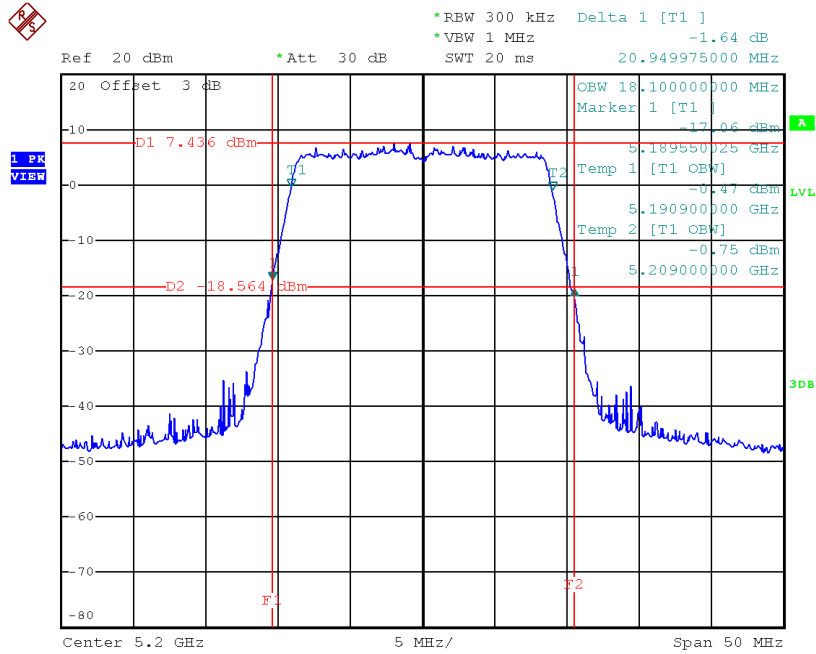

Date: 5.DEC.2017 15:47:52

TX CH48

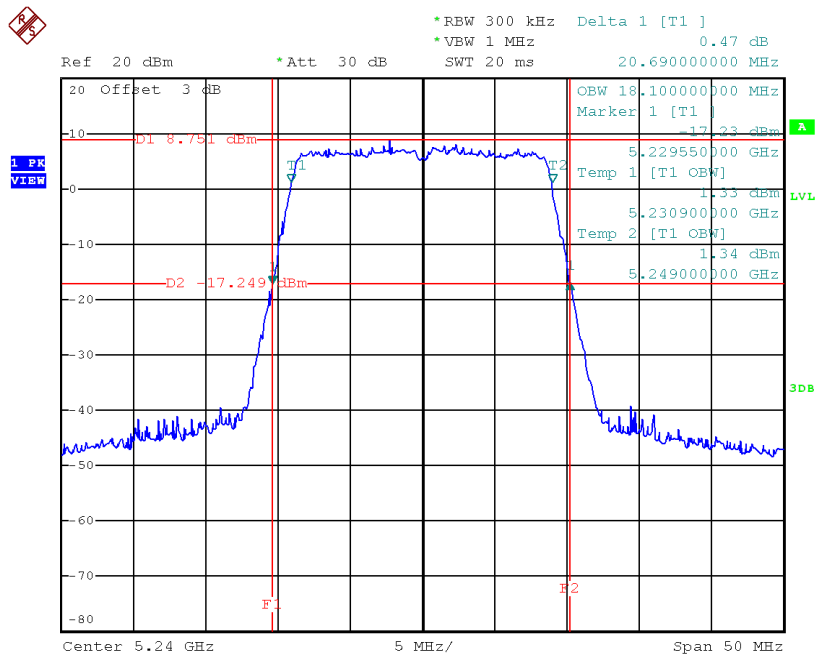


Date: 5.DEC.2017 15:48:56

Test Mode: UNII-1/TX AC40 Mode_CH38/CH46


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	41.50	37.00
CH46	5230	41.50	37.00

TX CH38

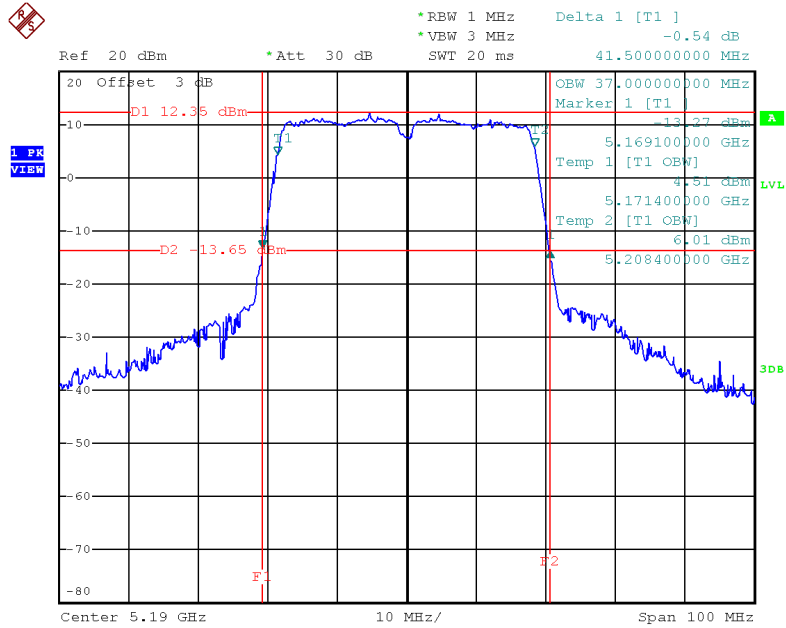

Date: 5.DEC.2017 16:29:01

TX CH46

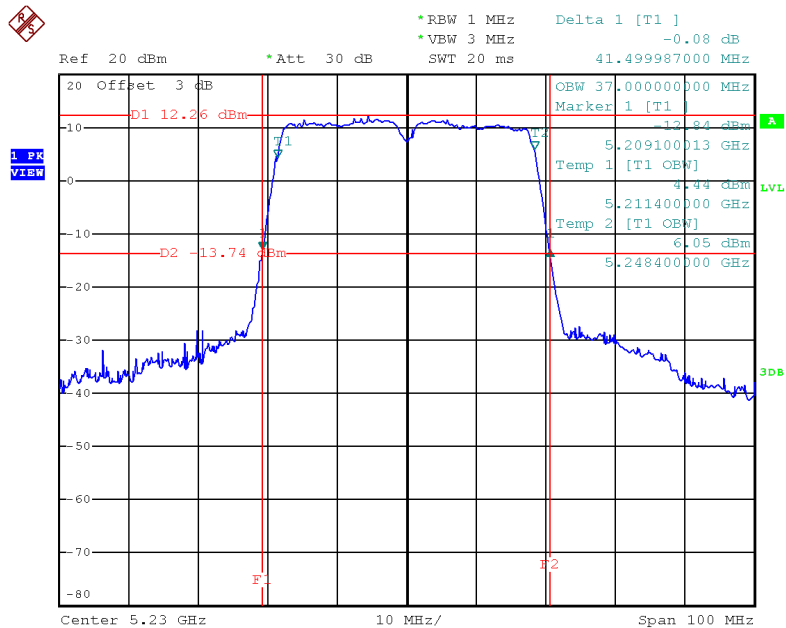


Date: 5.DEC.2017 16:29:55

Test Mode: UNII-1/TX AC80 Mode_CH42

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH42	5210	83.40	76.00

TX CH42

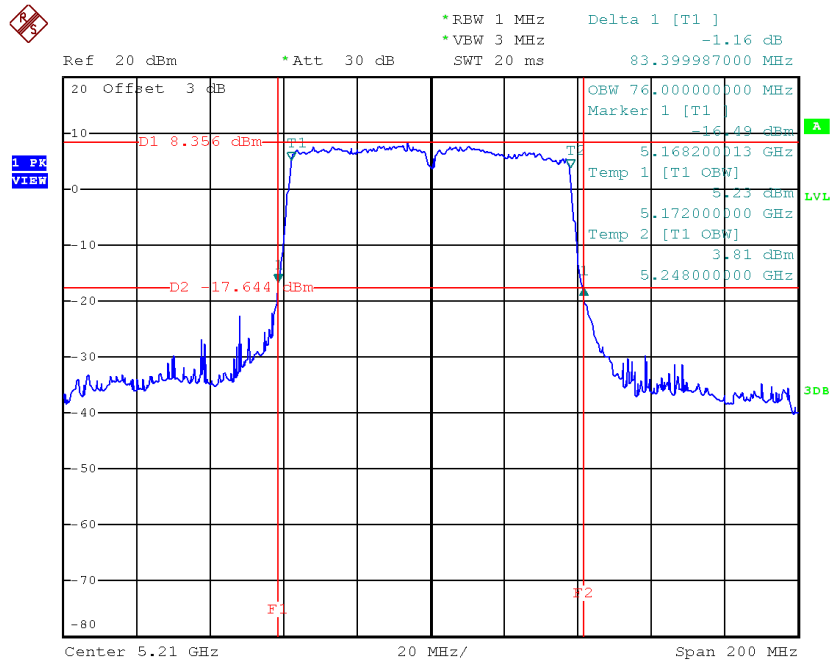


Date: 5.DEC.2017 16:36:46

Test Mode: UNII-3/ TX AC20 Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.61	17.70	>=500
CH157	5785	17.70	17.80	>=500
CH165	5825	17.65	17.70	>=500

TX CH 149

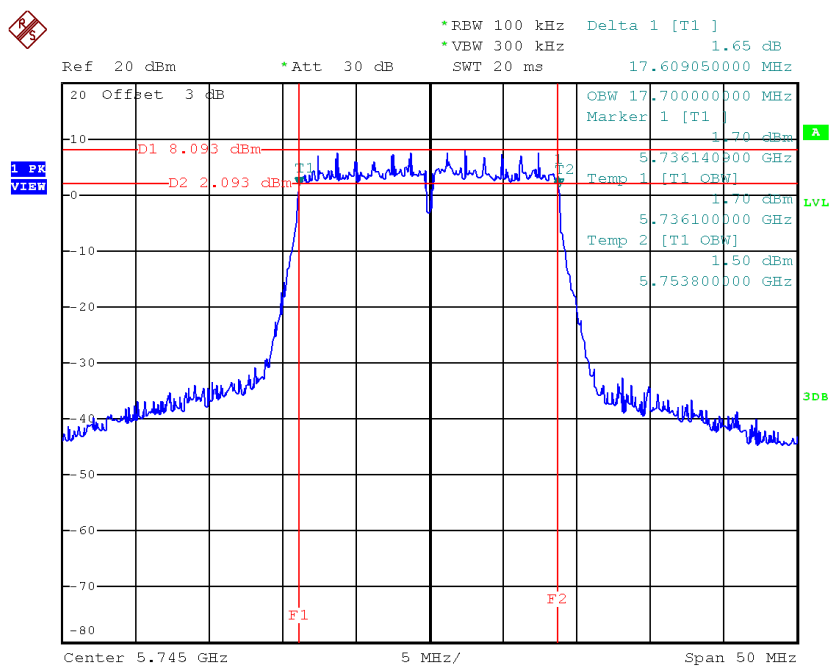


Date: 5.DEC.2017 15:49:58

TX CH 157

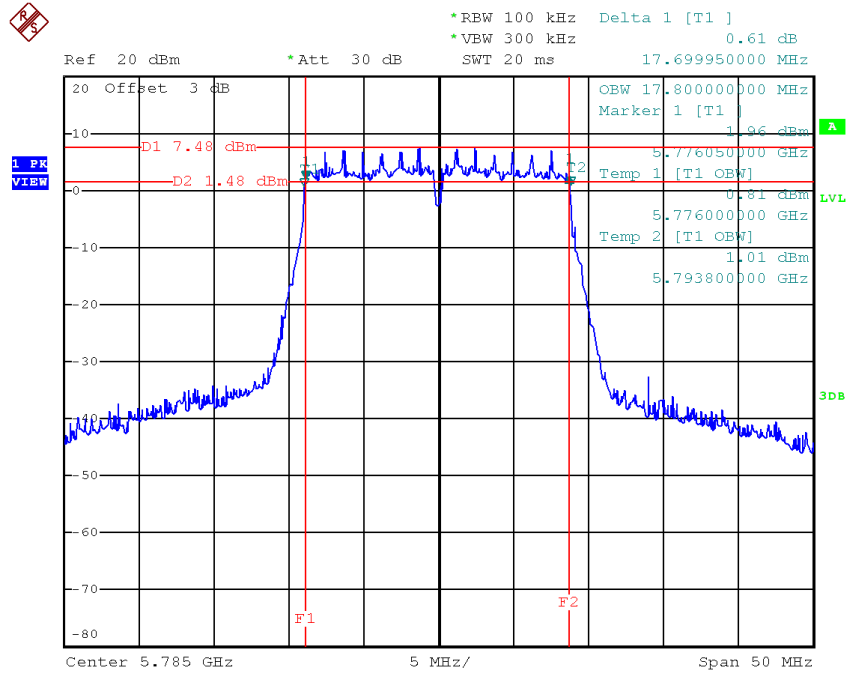

Date: 5.DEC.2017 15:51:50

TX CH 165

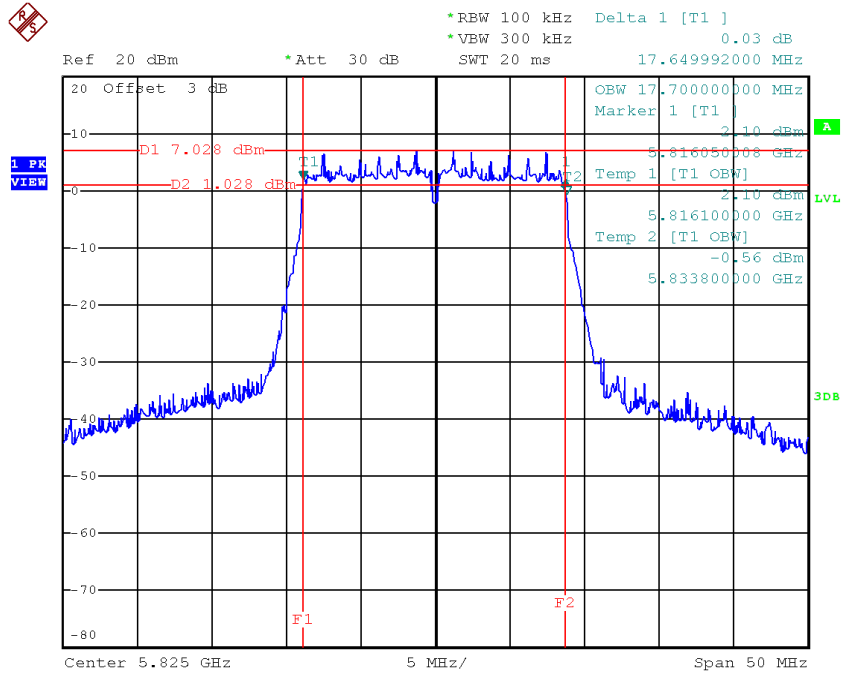


Date: 5.DEC.2017 15:52:48

Test Mode: UNII-3/ TX AC40 Mode_CH151/CH159


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	36.50	36.40	≥ 500
CH159	5795	36.50	36.20	≥ 500

TX CH 151

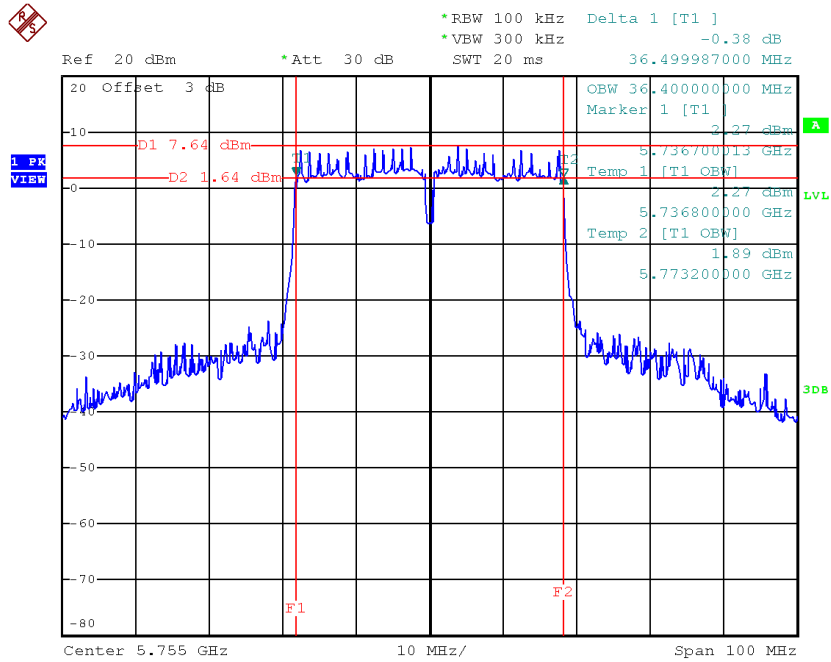

Date: 5.DEC.2017 16:31:11

TX CH 159

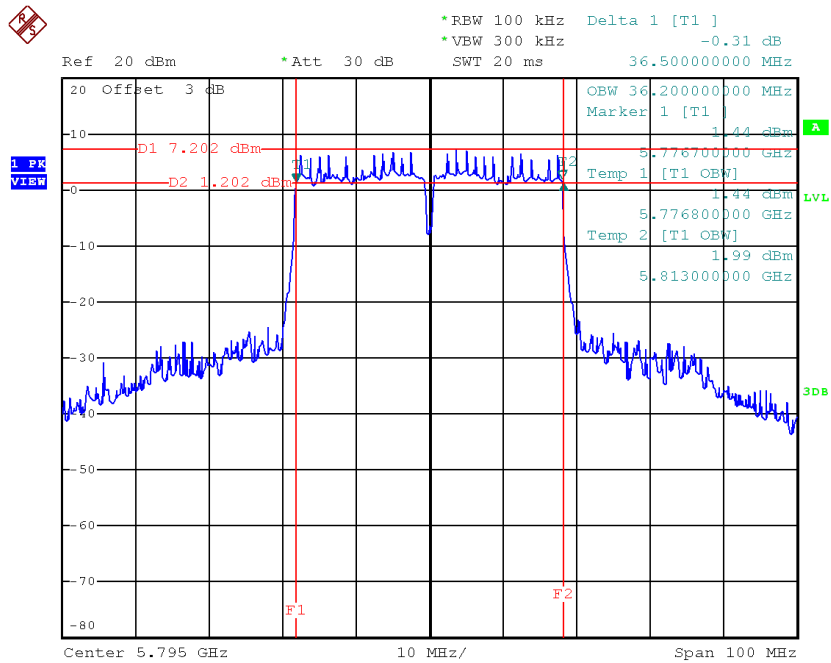


Date: 5.DEC.2017 16:32:37

Test Mode: UNII-3/ TX AC80 Mode_CH155

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH155	5775	76.41	76.00	>=500

TX CH 155

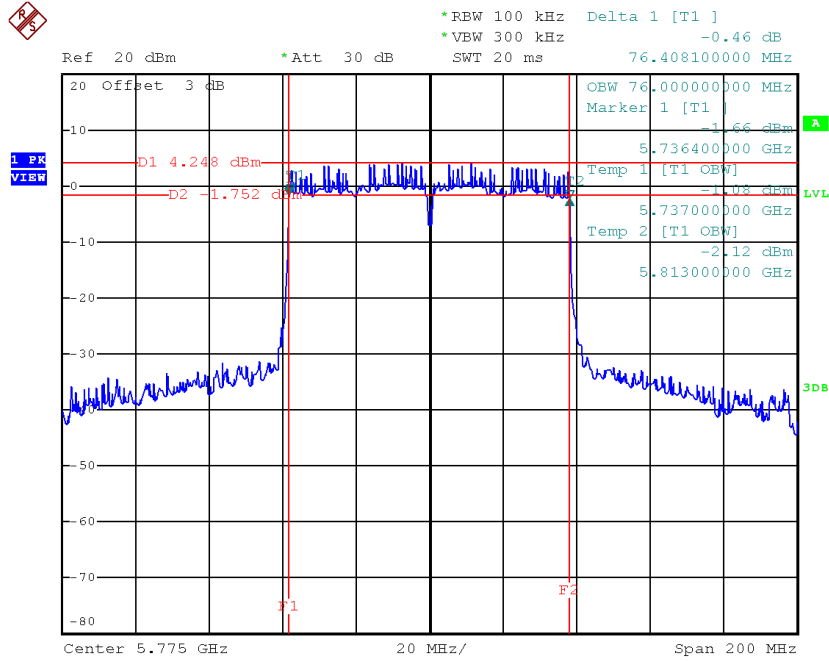


Date: 5.DEC.2017 16:38:28

Beamforming

Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	20.90	18.00
CH40	5200	20.70	18.00
CH48	5240	20.95	18.00

TX CH36

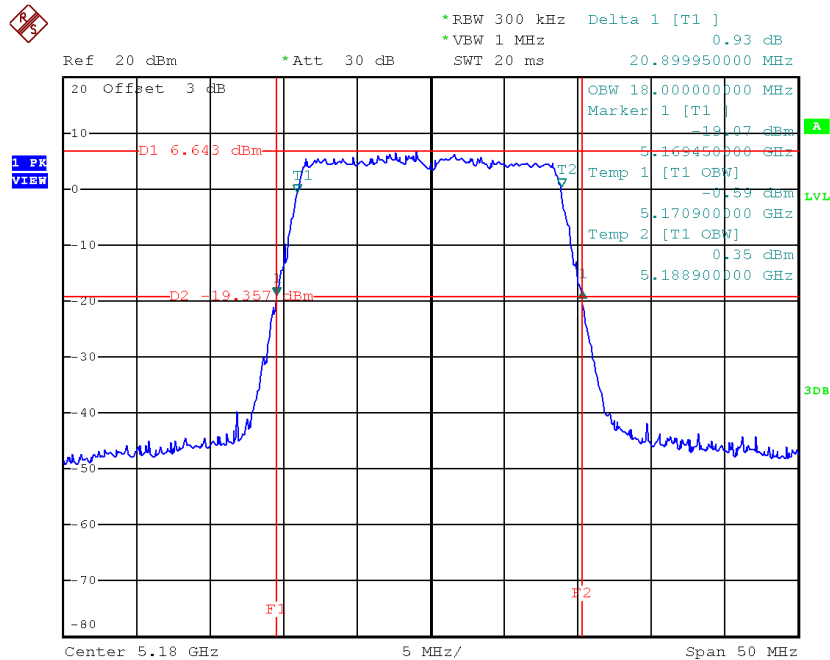


Date: 6.DEC.2017 16:54:14

TX CH40

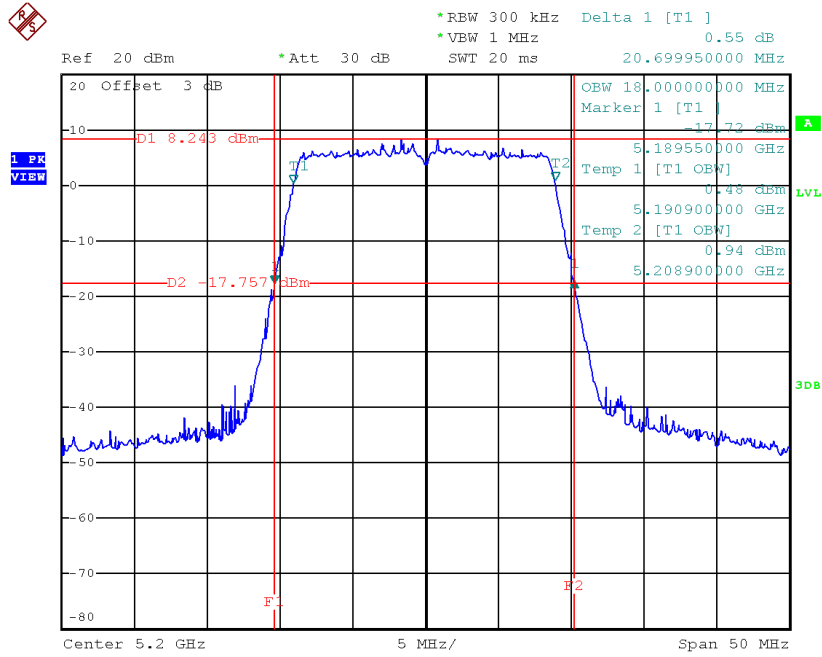

Date: 6.DEC.2017 16:56:18

TX CH48

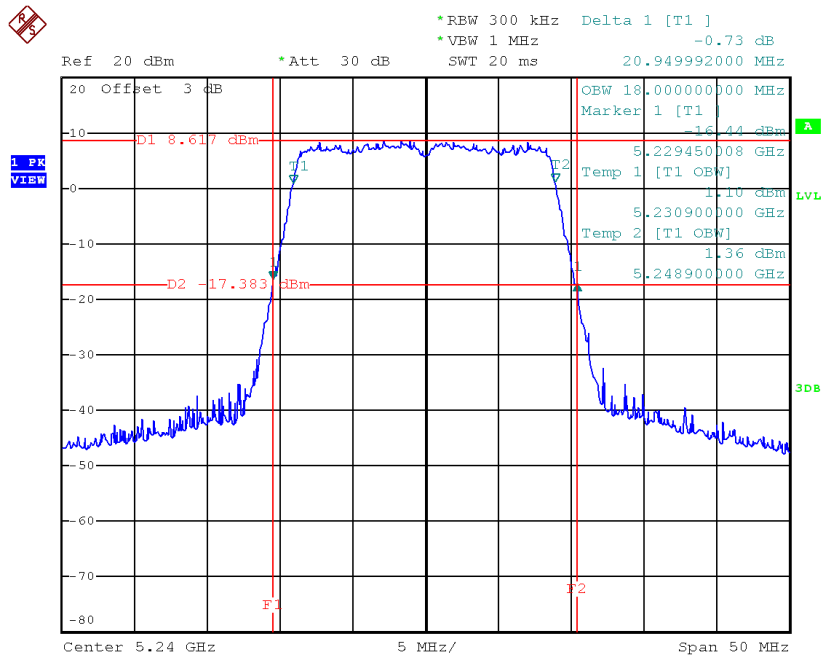


Date: 6.DEC.2017 16:57:19

Test Mode: UNII-1/TX N40 Mode_CH38/CH46


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	41.50	37.00
CH46	5230	41.50	37.00

TX CH38

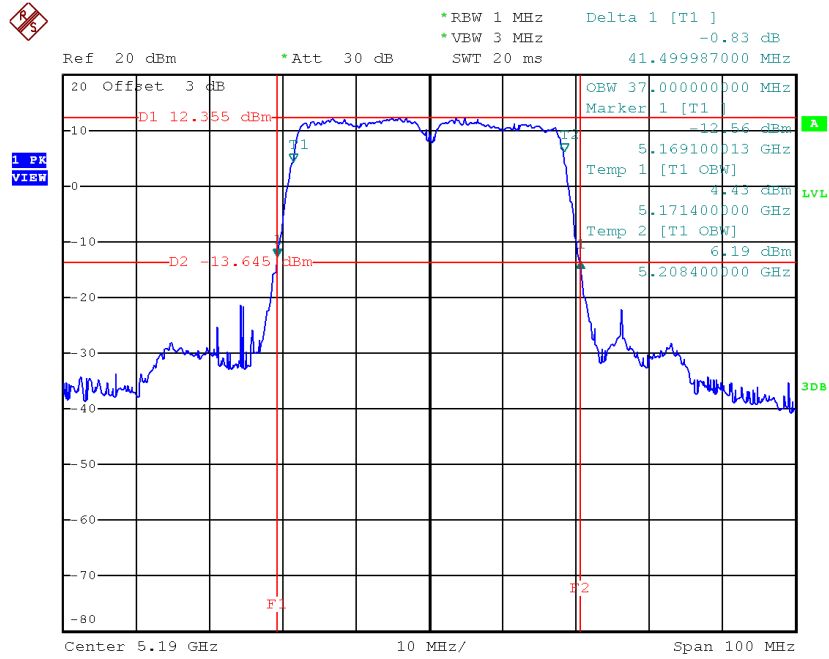

Date: 6.DEC.2017 18:22:21

TX CH46

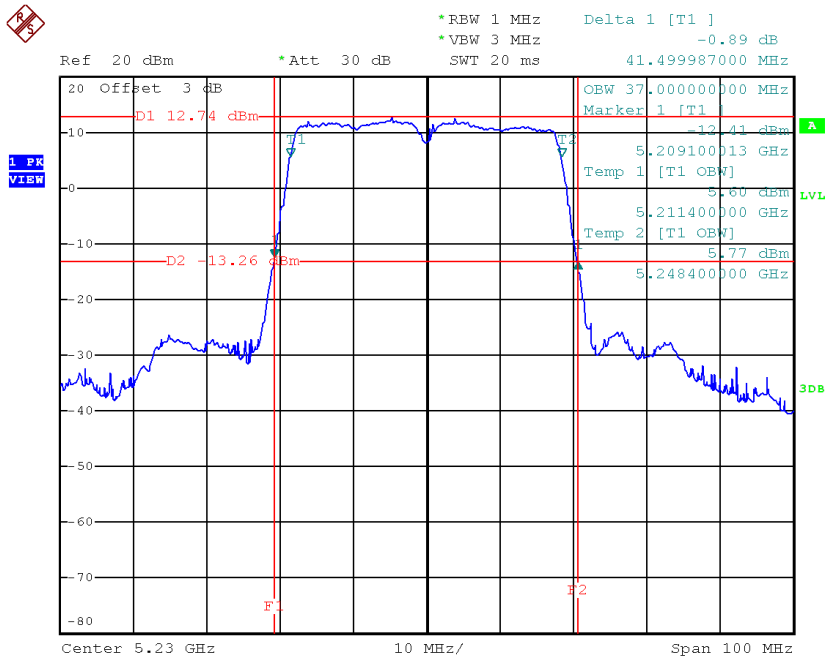


Date: 6.DEC.2017 18:23:30

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.61	17.70	>=500
CH157	5785	17.70	17.70	>=500
CH165	5825	17.70	17.70	>=500

TX CH 149

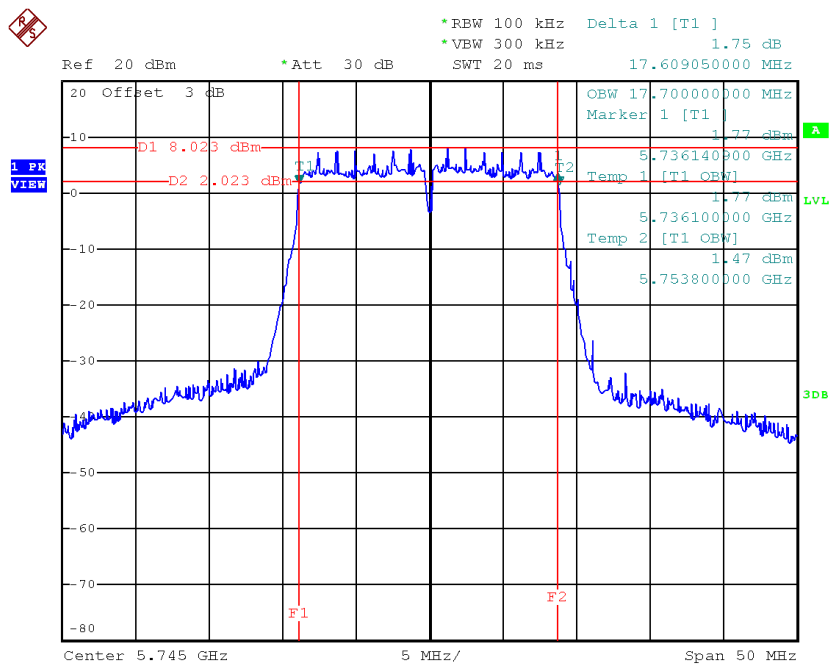


Date: 6.DEC.2017 16:58:29

TX CH 157

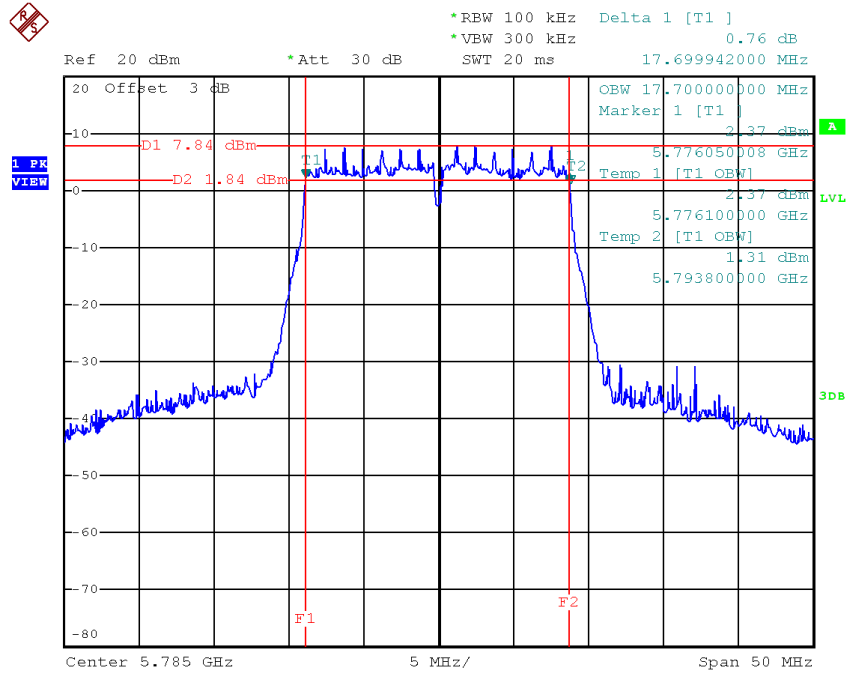

Date: 6.DEC.2017 16:59:34

TX CH 165

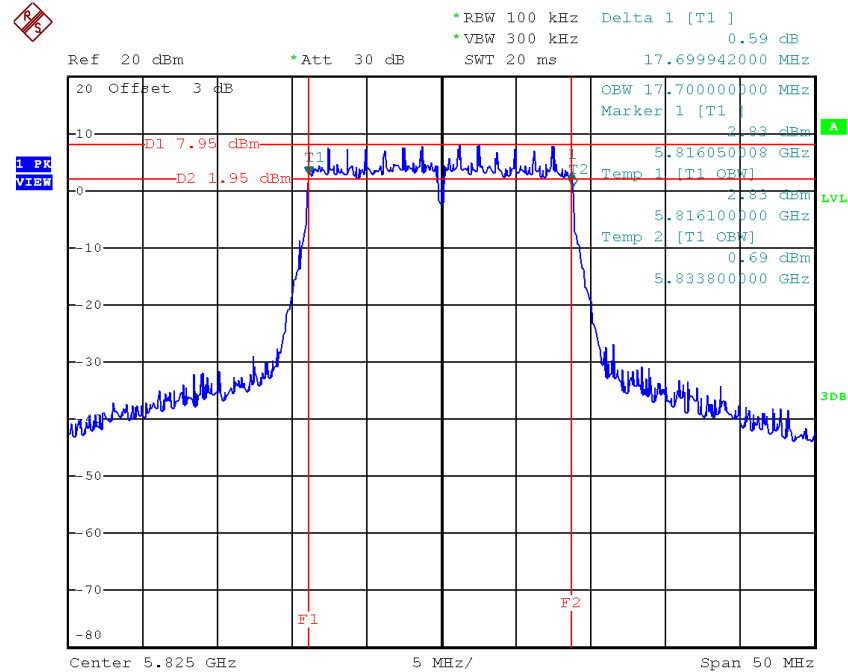


Date: 6.DEC.2017 17:00:34

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	36.50	36.40	>=500
CH159	5795	36.50	36.40	>=500

TX CH 151

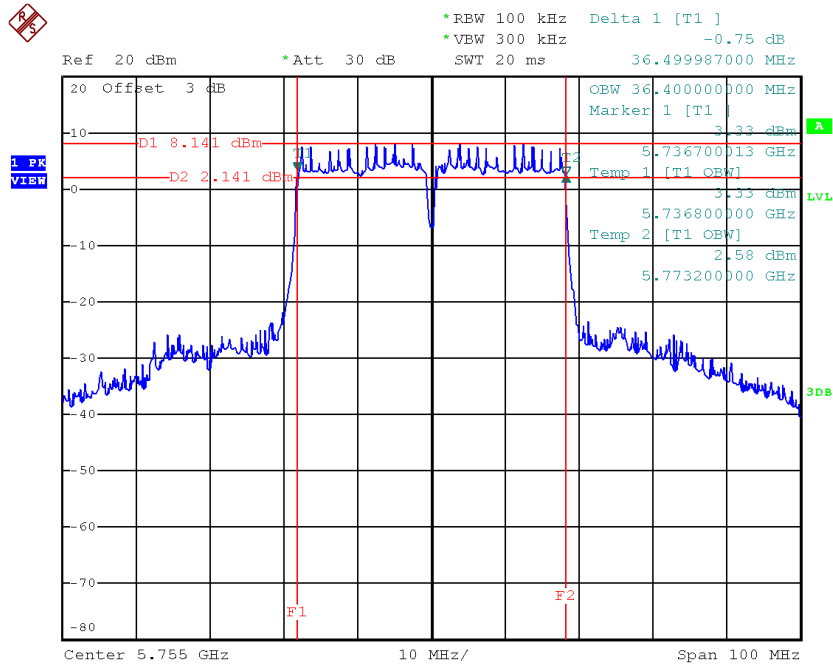

Date: 6.DEC.2017 18:25:11

TX CH 159

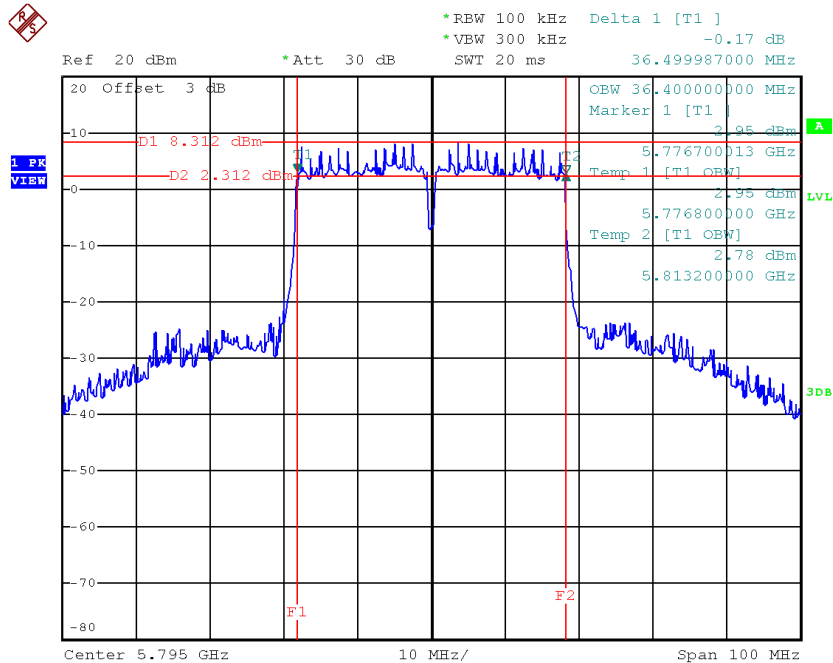


Date: 6.DEC.2017 18:26:38

Test Mode: UNII-1/TX AC20 Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	20.85	18.00
CH40	5200	20.90	18.10
CH48	5240	20.75	18.10

TX CH36

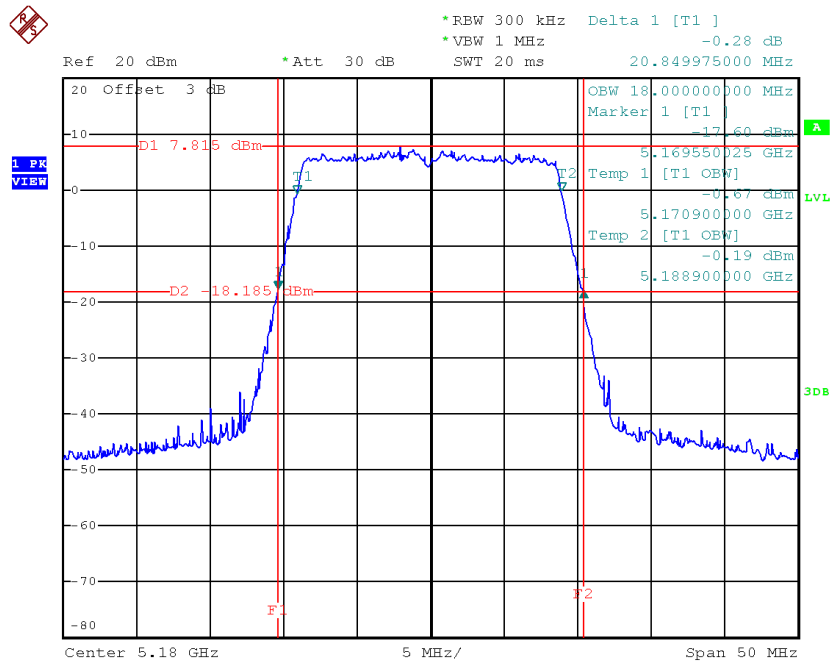


Date: 6.DEC.2017 18:14:16

TX CH40

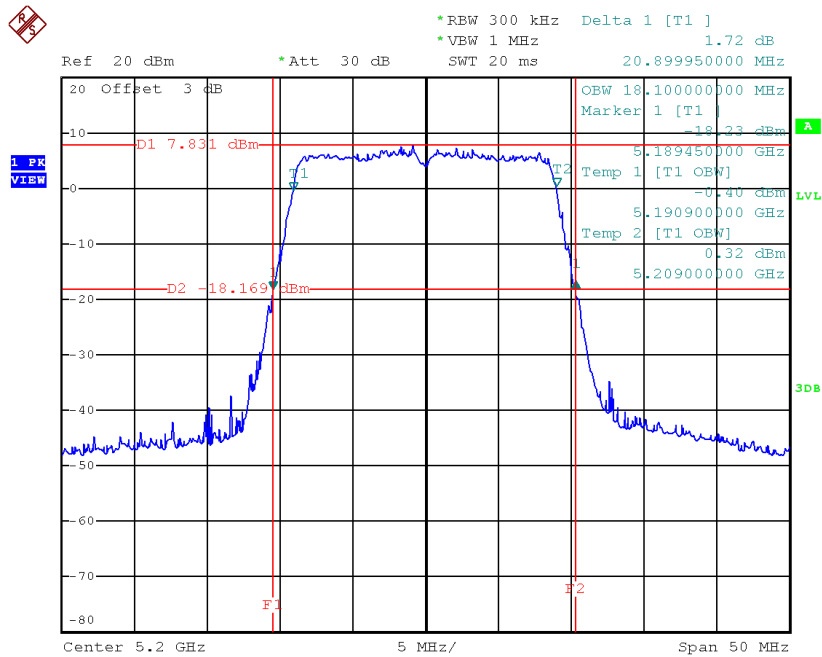

Date: 6.DEC.2017 18:15:17

TX CH48

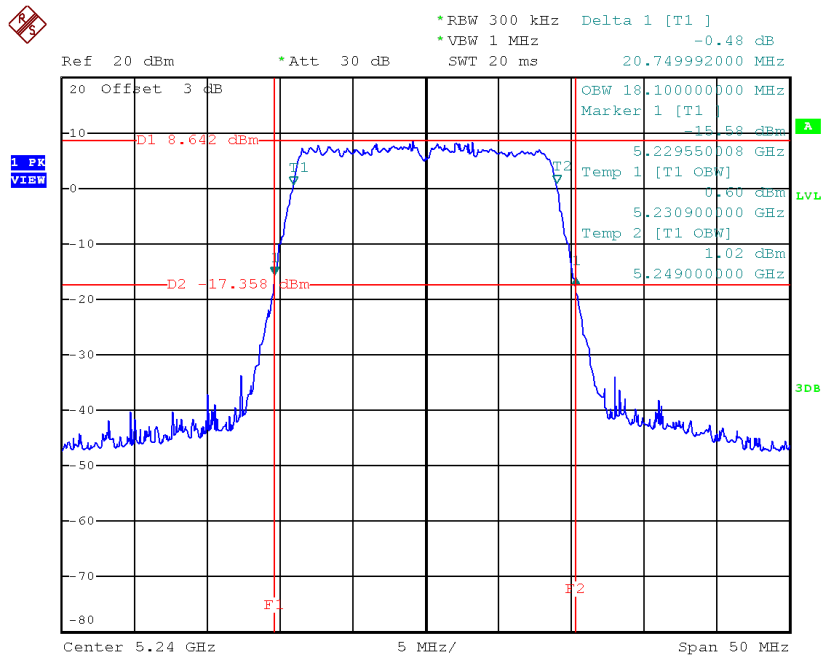


Date: 6.DEC.2017 18:16:56

Test Mode: UNII-1/TX AC40 Mode_CH38/CH46


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	41.50	37.00
CH46	5230	41.80	37.20

TX CH38

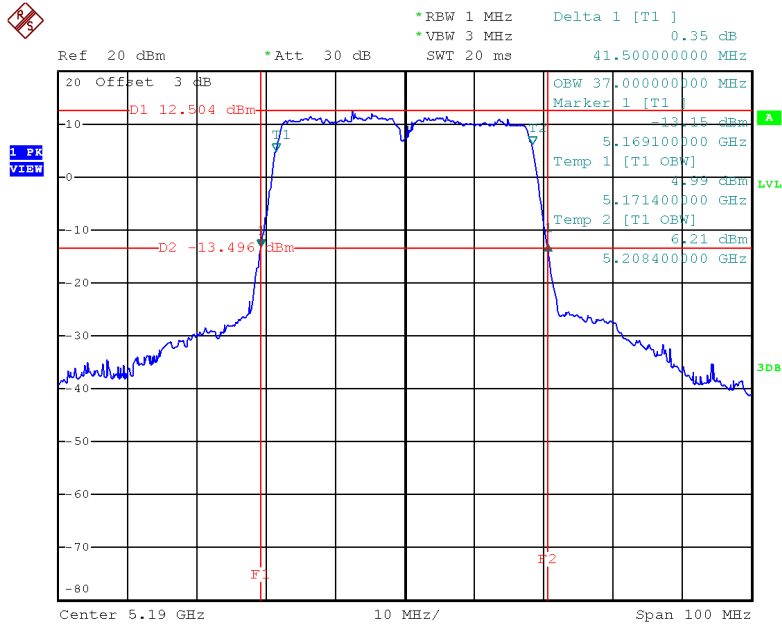

Date: 6.DEC.2017 18:53:21

TX CH46

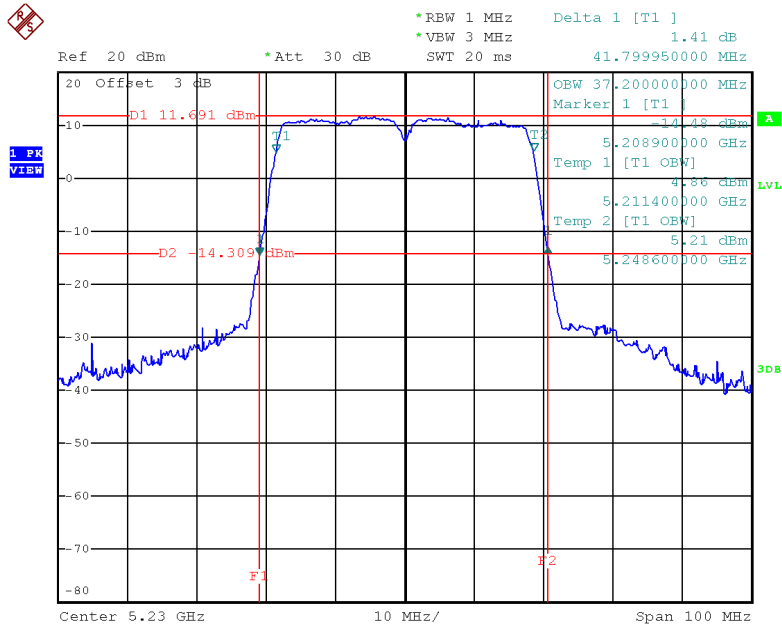


Date: 6.DEC.2017 18:54:40

Test Mode: UNII-1/TX AC80 Mode_CH42

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH42	5210	83.20	76.00

TX CH42

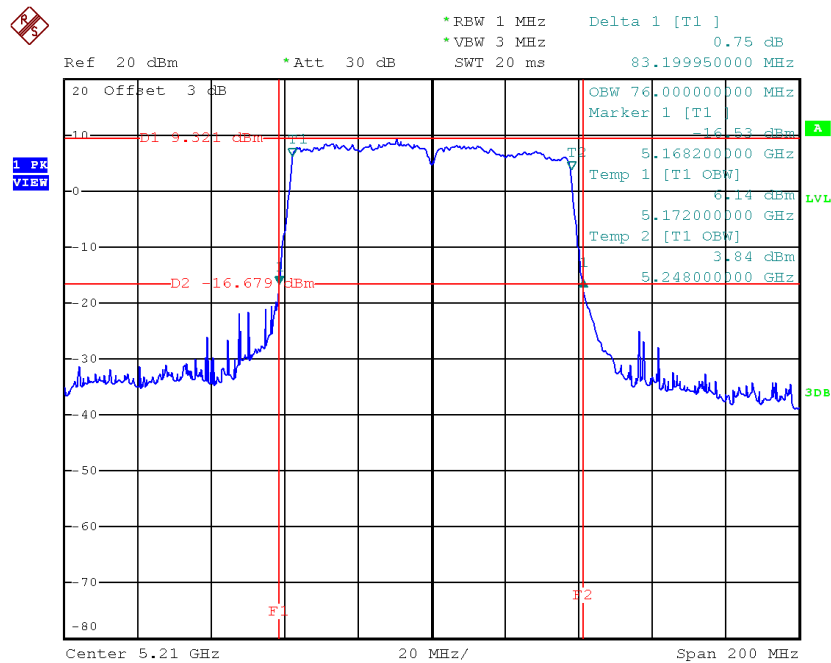


Date: 6.DEC.2017 19:00:39

Test Mode: UNII-3/ TX AC20 Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.61	17.70	>=500
CH157	5785	17.70	17.70	>=500
CH165	5825	17.65	17.70	>=500

TX CH 149

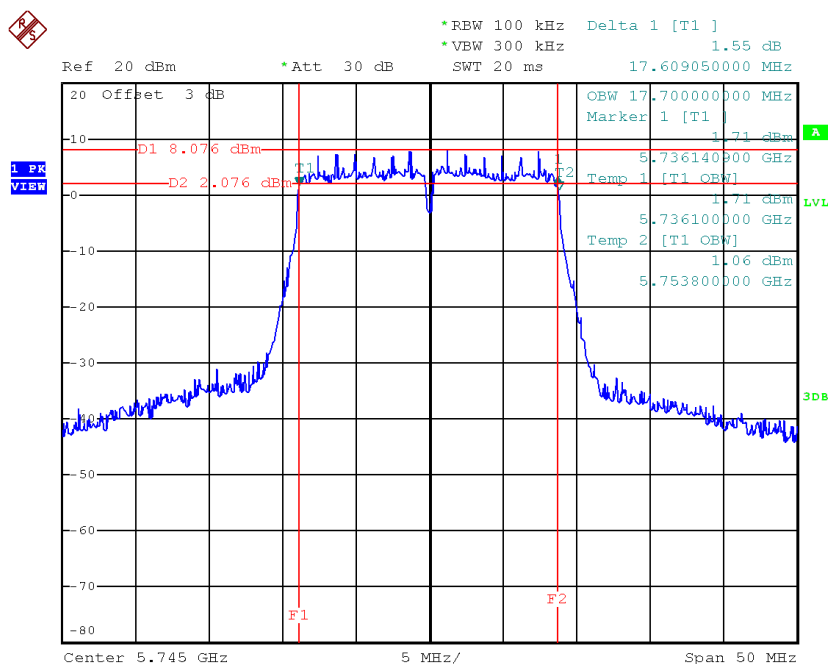


Date: 6.DEC.2017 18:18:00

TX CH 157

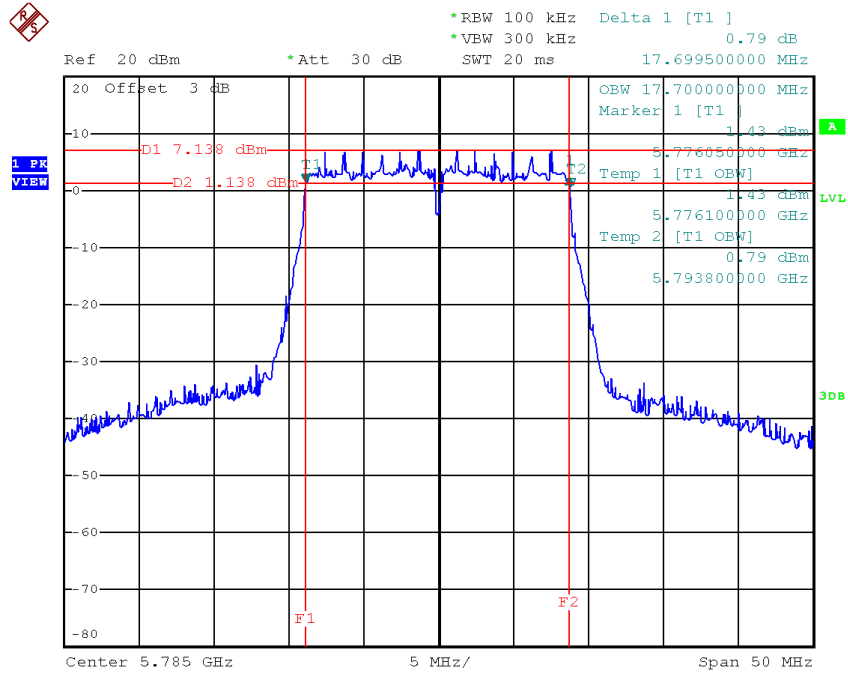

Date: 6.DEC.2017 18:19:18

TX CH 165

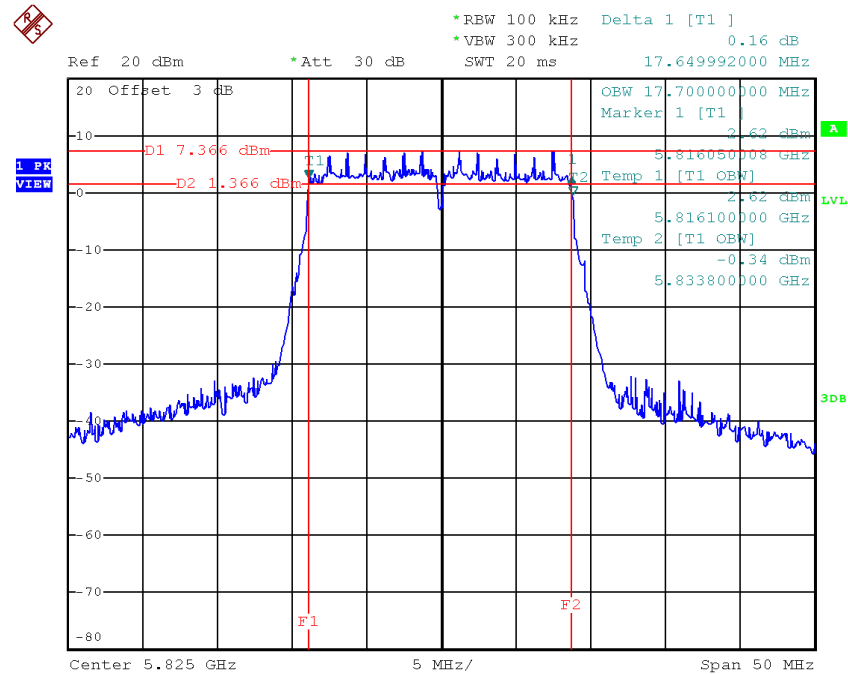


Date: 6.DEC.2017 18:20:25

Test Mode: UNII-3/ TX AC40 Mode_CH151/CH159


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	36.21	36.40	≥ 500
CH159	5795	36.50	36.40	≥ 500

TX CH 151

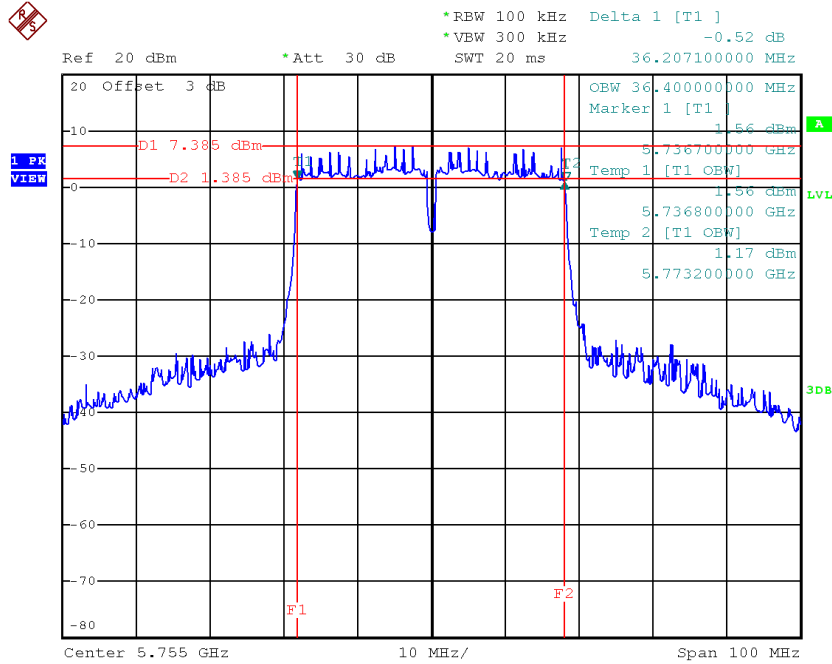

Date: 6.DEC.2017 18:56:01

TX CH 159

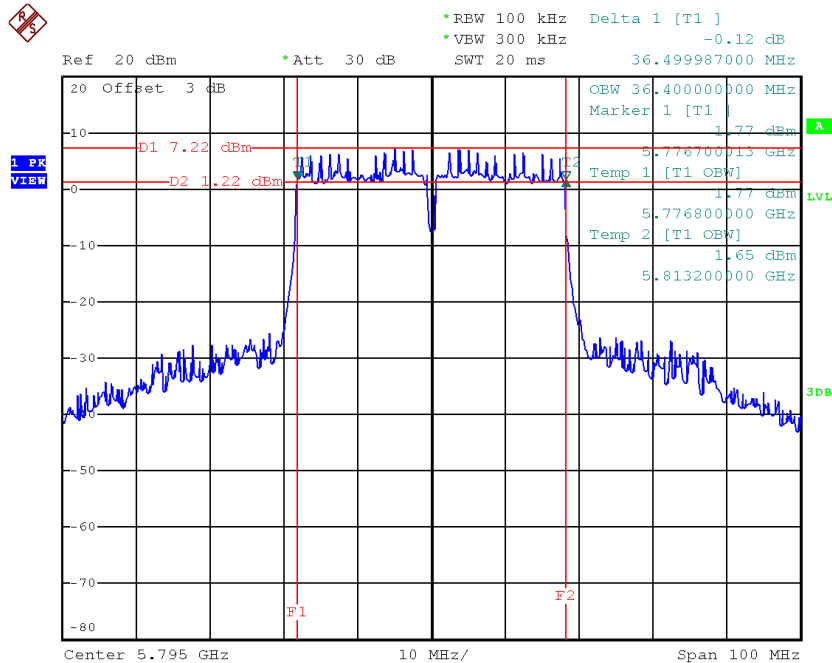


Date: 6.DEC.2017 18:57:18

Test Mode: UNII-3/ TX AC80 Mode_CH155

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH155	5775	76.01	76.00	>=500

TX CH 155

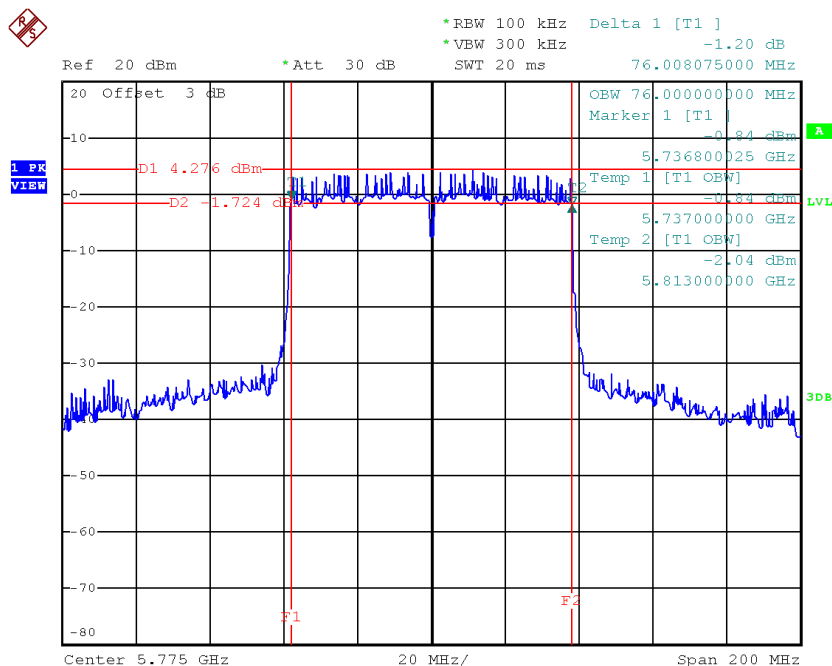

Date: 6.DEC.2017 19:02:07

APPENDIX F - MAXIMUM OUTPUT POWER

Non-Beamforming

Test Mode: UNII-1/TX A Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	11.68	0.25	11.93	30.00	1.00
CH40	5200	13.45	0.25	13.70	30.00	1.00
CH48	5240	14.54	0.25	14.79	30.00	1.00

Test Mode: UNII-1/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	13.72	0.60	14.32	30.00	1.00
CH40	5200	14.05	0.60	14.65	30.00	1.00
CH48	5240	15.65	0.60	16.25	30.00	1.00

Test Mode: UNII-1/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	14.27	0.60	14.87	30.00	1.00
CH40	5200	14.37	0.60	14.97	30.00	1.00
CH48	5240	15.90	0.60	16.50	30.00	1.00

Test Mode: UNII-1/TX N20 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	13.64	0.60	14.24	30.00	1.00
CH40	5200	13.95	0.60	14.55	30.00	1.00
CH48	5240	15.27	0.60	15.87	30.00	1.00

Test Mode: UNII-1/TX N20 Mode _Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	19.26	28.23	0.67
CH40	5200	19.50	28.23	0.67
CH48	5240	20.99	28.23	0.67

Test Mode: UNII-1/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	15.96	1.44	17.40	30.00	1.00
CH46	5230	15.77	1.44	17.21	30.00	1.00

Test Mode: UNII-1/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	16.21	1.44	17.65	30.00	1.00
CH46	5230	16.06	1.44	17.50	30.00	1.00

Test Mode: UNII-1/TX N40 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	15.45	1.44	16.89	30.00	1.00
CH46	5230	15.72	1.44	17.16	30.00	1.00

Test Mode: UNII-1/TX N40 Mode _Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	22.10	28.23	0.67
CH46	5230	22.06	28.23	0.67

Test Mode: UNII-3/ TX A Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	22.30	0.25	22.55	30.00	1.00
CH157	5785	21.93	0.25	22.18	30.00	1.00
CH165	5825	21.35	0.25	21.60	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	19.35	0.60	19.95	30.00	1.00
CH157	5785	19.02	0.60	19.62	30.00	1.00
CH165	5825	18.97	0.60	19.57	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	19.63	0.60	20.23	30.00	1.00
CH157	5785	19.14	0.60	19.74	30.00	1.00
CH165	5825	19.40	0.60	20.00	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	18.76	0.60	19.36	30.00	1.00
CH157	5785	18.06	0.60	18.66	30.00	1.00
CH165	5825	18.33	0.60	18.93	30.00	1.00

Test Mode: UNII-3/TX N20 Mode _Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	24.63	28.23	0.67
CH157	5785	24.14	28.23	0.67
CH165	5825	24.29	28.23	0.67

Test Mode: UNII-3/ TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	21.36	1.44	22.80	30.00	1.00
CH159	5795	21.65	1.44	23.09	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	21.53	1.44	22.97	30.00	1.00
CH159	5795	21.44	1.44	22.88	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	21.02	1.44	22.46	30.00	1.00
CH159	5795	20.56	1.44	22.00	30.00	1.00

Test Mode: UNII-3/TX N40 Mode _Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	27.52	28.23	0.67
CH159	5795	27.45	28.23	0.67

Test Mode: UNII-1/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	13.89	0.25	14.14	30.00	1.00
CH40	5200	14.13	0.25	14.38	30.00	1.00
CH48	5240	15.19	0.25	15.44	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	14.60	0.25	14.85	30.00	1.00
CH40	5200	14.95	0.25	15.20	30.00	1.00
CH48	5240	15.89	0.25	16.14	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	14.17	0.25	14.42	30.00	1.00
CH40	5200	14.44	0.25	14.69	30.00	1.00
CH48	5240	15.57	0.25	15.82	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	19.25	28.23	0.67
CH40	5200	19.54	28.23	0.67
CH48	5240	20.58	28.23	0.67

Test Mode: UNII-1/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	15.83	0.48	16.31	30.00	1.00
CH46	5230	15.93	0.48	16.41	30.00	1.00

Test Mode: UNII-1/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	16.06	0.48	16.54	30.00	1.00
CH46	5230	16.05	0.48	16.53	30.00	1.00

Test Mode: UNII-1/TX AC40 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	15.77	0.48	16.25	30.00	1.00
CH46	5230	15.44	0.48	15.92	30.00	1.00

Test Mode: UNII-1/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	21.14	28.23	0.67
CH46	5230	21.07	28.23	0.67

Test Mode: UNII-1/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	16.04	1.38	17.42	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	16.17	1.38	17.55	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	15.53	1.38	16.91	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	22.07	28.23	0.67

Test Mode: UNII-3/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	19.87	0.25	20.12	30.00	1.00
CH157	5785	19.15	0.25	19.40	30.00	1.00
CH165	5825	18.83	0.25	19.08	30.00	1.00

Test Mode: UNII-3/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	20.05	0.25	20.30	30.00	1.00
CH157	5785	19.51	0.25	19.76	30.00	1.00
CH165	5825	18.95	0.25	19.20	30.00	1.00

Test Mode: UNII-3/TX AC20 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	18.81	0.25	19.06	30.00	1.00
CH157	5785	18.34	0.25	18.59	30.00	1.00
CH165	5825	17.69	0.25	17.94	30.00	1.00

Test Mode: UNII-3/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	24.63	28.23	0.67
CH157	5785	24.05	28.23	0.67
CH165	5825	23.55	28.23	0.67

Test Mode: UNII-3/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	21.15	0.48	21.63	30.00	1.00
CH159	5795	20.89	0.48	21.37	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	21.51	0.48	21.99	30.00	1.00
CH159	5795	20.96	0.48	21.44	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	20.94	0.48	21.42	30.00	1.00
CH159	5795	20.04	0.48	20.52	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	26.46	28.23	0.67
CH159	5795	25.90	28.23	0.67

Test Mode: UNII-3/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	21.56	1.38	22.94	30.00	1.00

Test Mode: UNII-3/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	21.64	1.38	23.02	30.00	1.00

Test Mode: UNII-3/TX AC80 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	20.94	1.38	22.32	30.00	1.00

Test Mode: UNII-3/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	27.54	28.23	0.67

Beamforming

Test Mode: UNII-1/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	13.83	0.60	14.43	30.00	1.00
CH40	5200	14.00	0.60	14.60	30.00	1.00
CH48	5240	15.76	0.60	16.36	30.00	1.00

Test Mode: UNII-1/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	14.20	0.60	14.80	30.00	1.00
CH40	5200	14.46	0.60	15.06	30.00	1.00
CH48	5240	15.83	0.60	16.43	30.00	1.00

Test Mode: UNII-1/TX N20 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	13.76	0.60	14.36	30.00	1.00
CH40	5200	13.79	0.60	14.39	30.00	1.00
CH48	5240	15.39	0.60	15.99	30.00	1.00

Test Mode: UNII-1/TX N20 Mode _Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	19.31	28.23	0.67
CH40	5200	19.46	28.23	0.67
CH48	5240	21.04	28.23	0.67

Test Mode: UNII-1/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	16.07	1.44	17.51	30.00	1.00
CH46	5230	15.72	1.44	17.16	30.00	1.00

Test Mode: UNII-1/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	16.14	1.44	17.58	30.00	1.00
CH46	5230	16.15	1.44	17.59	30.00	1.00

Test Mode: UNII-1/TX N40 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	15.57	1.44	17.01	30.00	1.00
CH46	5230	15.56	1.44	17.00	30.00	1.00

Test Mode: UNII-1/TX N40 Mode _Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	22.15	28.23	0.67
CH46	5230	22.03	28.23	0.67

Test Mode: UNII-3/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	19.30	0.60	19.90	30.00	1.00
CH157	5785	19.13	0.60	19.73	30.00	1.00
CH165	5825	18.92	0.60	19.52	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	19.72	0.60	20.32	30.00	1.00
CH157	5785	19.07	0.60	19.67	30.00	1.00
CH165	5825	19.49	0.60	20.09	30.00	0.67

Test Mode: UNII-3/TX N20 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	18.60	0.60	19.20	30.00	1.00
CH157	5785	18.18	0.60	18.78	30.00	1.00
CH165	5825	18.17	0.60	18.77	30.00	1.00

Test Mode: UNII-3/TX N20 Mode _Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	24.60	28.23	0.67
CH157	5785	24.19	28.23	0.67
CH165	5825	24.26	28.23	0.67

Test Mode: UNII-3/ TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	21.47	1.44	22.91	30.00	1.00
CH159	5795	21.60	1.44	23.04	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	21.46	1.44	22.90	30.00	1.00
CH159	5795	21.53	1.44	22.97	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	21.14	1.44	22.58	30.00	1.00
CH159	5795	20.40	1.44	21.84	30.00	1.00

Test Mode: UNII-3/TX N40 Mode _Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	27.57	28.23	0.67
CH159	5795	27.42	28.23	0.67

Test Mode: UNII-1/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	14.00	0.25	14.25	30.00	1.00
CH40	5200	14.08	0.25	14.33	30.00	1.00
CH48	5240	15.30	0.25	15.55	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	14.53	0.25	14.78	30.00	1.00
CH40	5200	15.04	0.25	15.29	30.00	1.00
CH48	5240	15.82	0.25	16.07	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	14.29	0.25	14.54	30.00	1.00
CH40	5200	14.28	0.25	14.53	30.00	1.00
CH48	5240	15.69	0.25	15.94	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	19.30	28.23	0.67
CH40	5200	19.51	28.23	0.67
CH48	5240	20.63	28.23	0.67

Test Mode: UNII-1/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	15.94	0.48	16.42	30.00	1.00
CH46	5230	15.88	0.48	16.36	30.00	1.00

Test Mode: UNII-1/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	15.99	0.48	16.47	30.00	1.00
CH46	5230	16.14	0.48	16.62	30.00	1.00

Test Mode: UNII-1/TX AC40 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	15.89	0.48	16.37	30.00	1.00
CH46	5230	15.28	0.48	15.76	30.00	1.00

Test Mode: UNII-1/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	21.19	28.23	0.67
CH46	5230	21.03	28.23	0.67

Test Mode: UNII-1/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	16.15	1.38	17.53	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	16.10	1.38	17.48	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	15.65	1.38	17.03	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	22.12	28.23	0.67

Test Mode: UNII-3/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	19.82	0.25	20.07	30.00	1.00
CH157	5785	19.26	0.25	19.51	30.00	1.00
CH165	5825	18.78	0.25	19.03	30.00	1.00

Test Mode: UNII-3/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	20.14	0.25	20.39	30.00	1.00
CH157	5785	19.44	0.25	19.69	30.00	1.00
CH165	5825	19.04	0.25	19.29	30.00	1.00

Test Mode: UNII-3/TX AC20 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	18.65	0.25	18.90	30.00	1.00
CH157	5785	18.46	0.25	18.71	30.00	1.00
CH165	5825	17.53	0.25	17.78	30.00	1.00

Test Mode: UNII-3/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	24.60	28.23	0.67
CH157	5785	24.09	28.23	0.67
CH165	5825	23.52	28.23	0.67

Test Mode: UNII-3/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	21.26	0.48	21.74	30.00	1.00
CH159	5795	20.84	0.48	21.32	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	21.44	0.48	21.92	30.00	1.00
CH159	5795	21.05	0.48	21.53	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	21.06	0.48	21.54	30.00	1.00
CH159	5795	19.88	0.48	20.36	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	26.51	28.23	0.67
CH159	5795	25.87	28.23	0.67

Test Mode: UNII-3/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	21.51	1.38	22.89	30.00	1.00

Test Mode: UNII-3/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	21.73	1.38	23.11	30.00	1.00

Test Mode: UNII-3/TX AC80 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	20.78	1.38	22.16	30.00	1.00

Test Mode: UNII-3/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	27.51	28.23	0.67


APPENDIX G - POWER SPECTRAL DENSITY

Non-Beamforming

Test Mode: UNII-1/ TX A Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	1.51	0.25	1.76	17.00
CH40	5200	2.55	0.25	2.80	17.00
CH48	5240	3.93	0.25	4.18	17.00

CH36

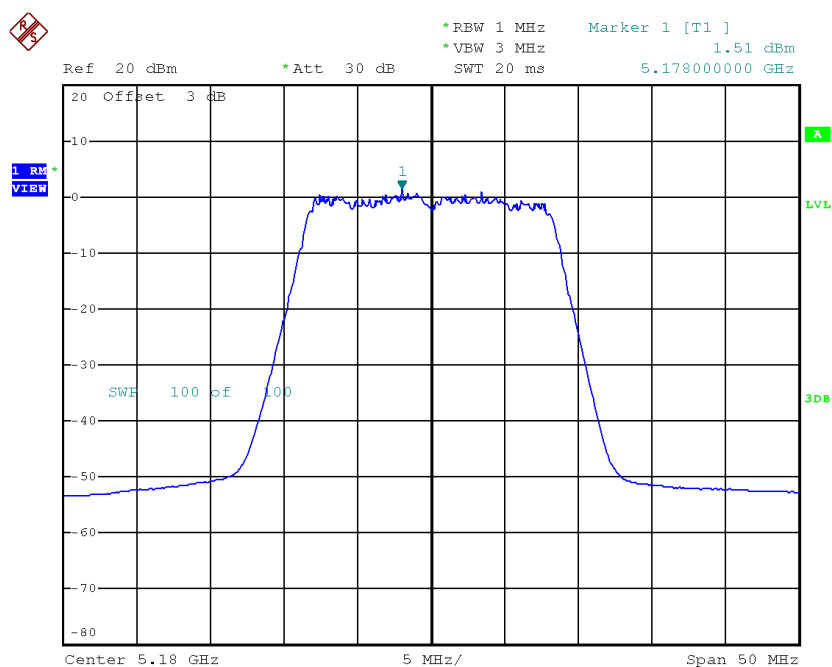


Date: 5.DEC.2017 14:35:16

CH40

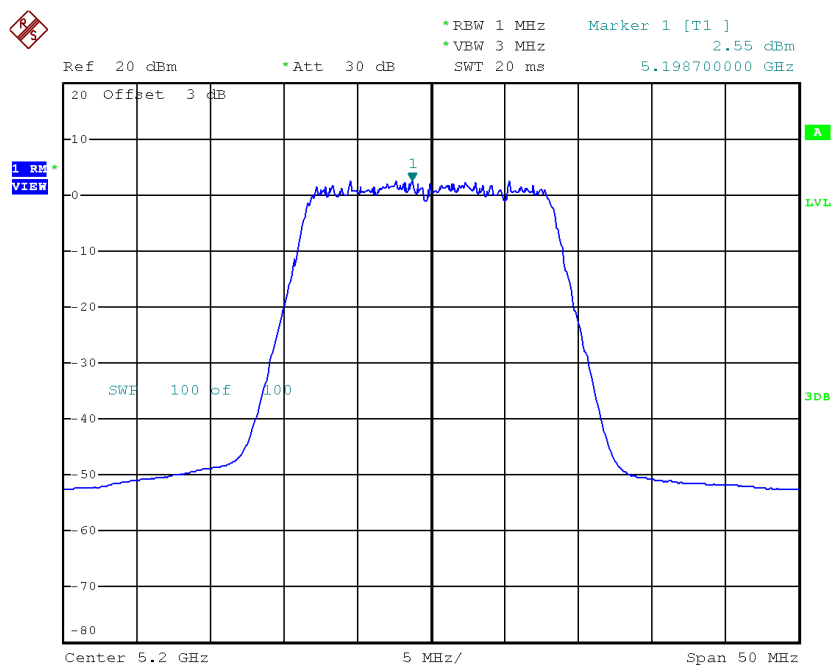

Date: 5.DEC.2017 14:36:26


CH48

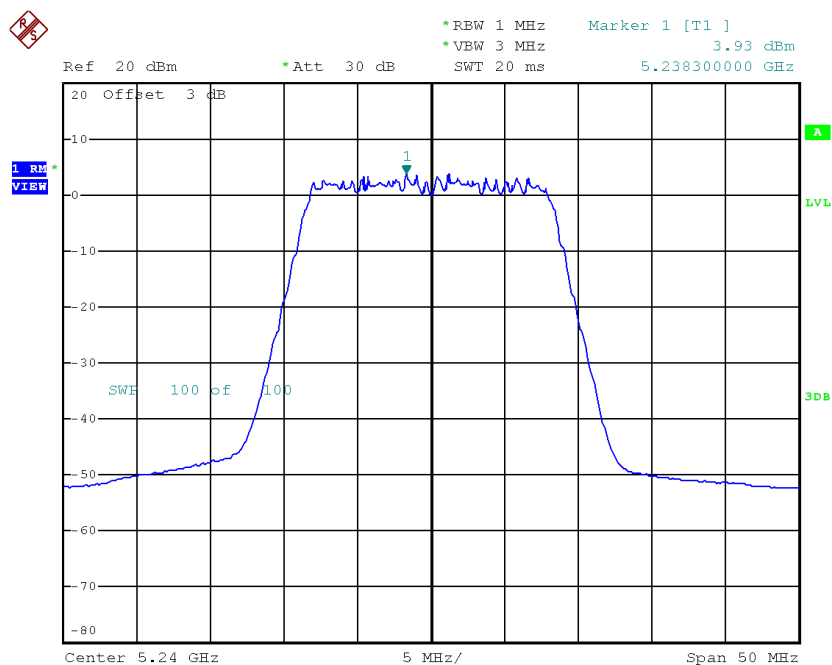

Date: 5.DEC.2017 14:37:25


Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	2.01	0.60	2.61	17.00
CH40	5200	0.91	0.60	1.51	17.00
CH48	5240	2.60	0.60	3.20	17.00

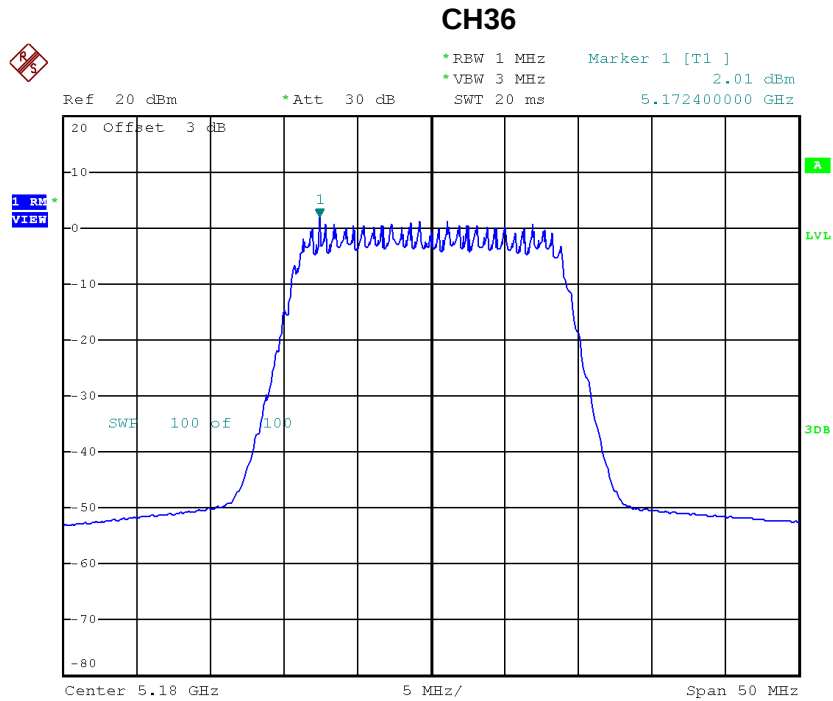


Date: 5.DEC.2017 15:13:03

CH40

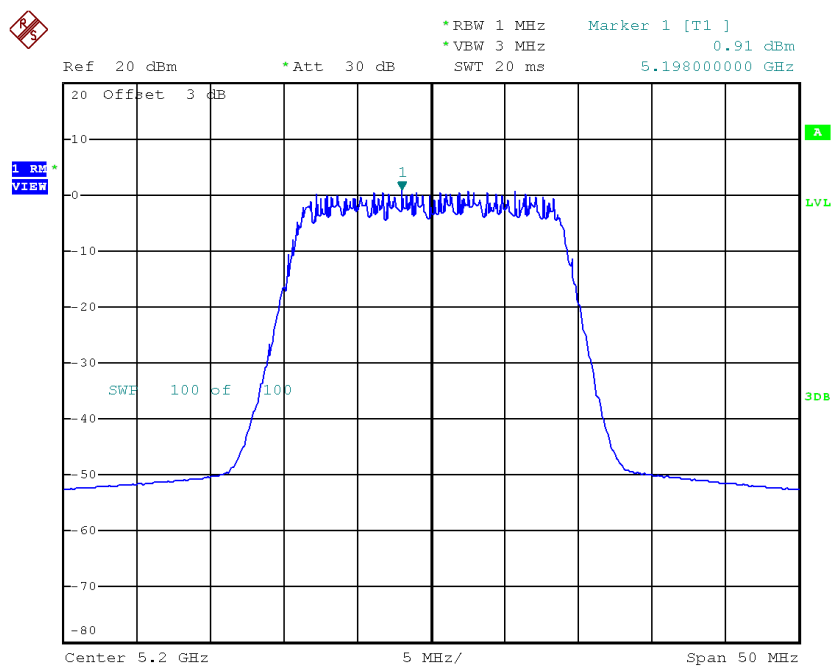

Date: 5.DEC.2017 15:14:03

CH48

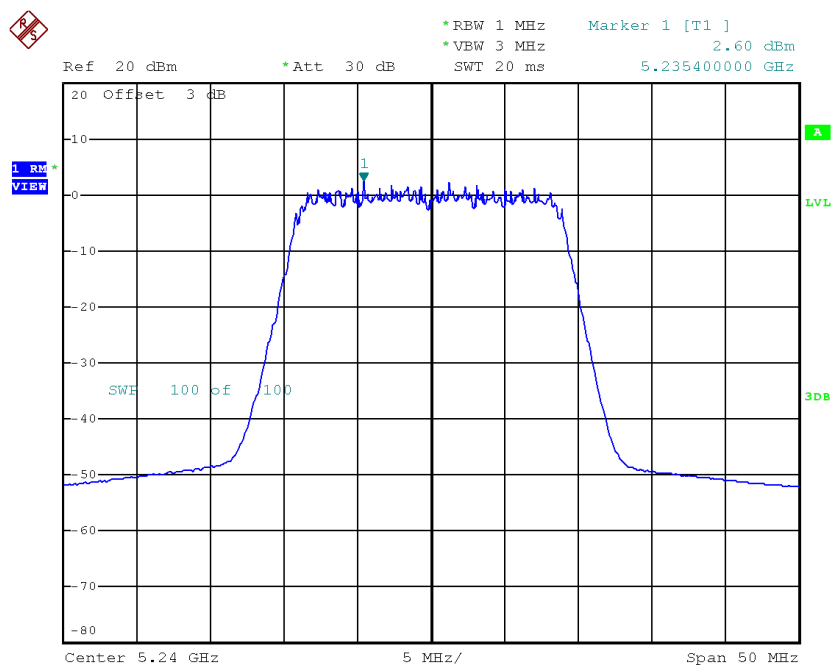


Date: 5.DEC.2017 15:15:21

Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	3.00	0.60	3.60	17.00
CH40	5200	1.07	0.60	1.67	17.00
CH48	5240	3.49	0.60	4.09	17.00

CH36

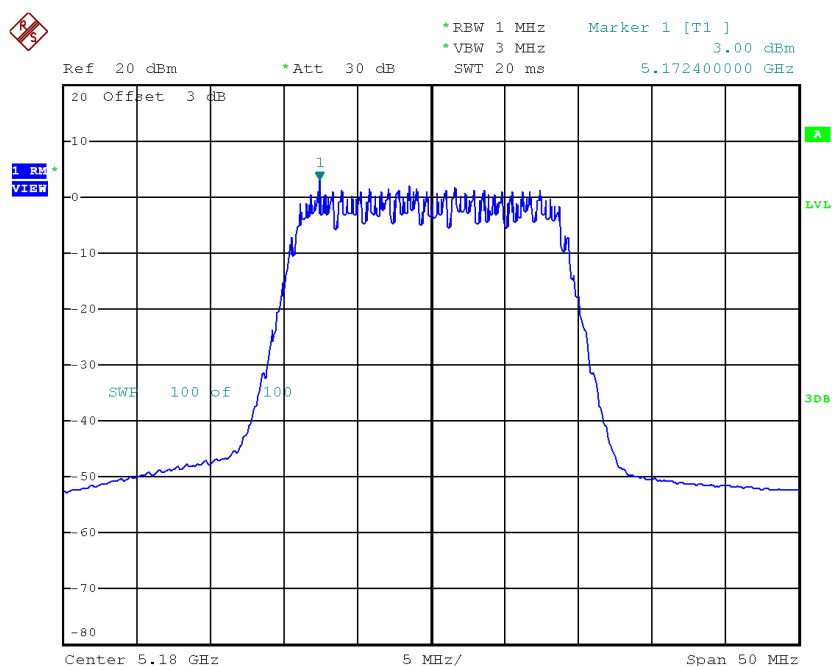

Date: 5.DEC.2017 15:03:51