



TEST REPORT

Application No.: GZCR2105020327AT
Applicant: Echelon Fitness Multimedia, LLC
Address of Applicant: 605 Chestnut Street, Suite 700, Chattanooga, TN 37450 USA
Manufacturer: Echelon Fitness Multimedia, LLC
Address of Manufacturer: 605 Chestnut Street, Suite 700, Chattanooga, TN 37450 USA
Factory: TES Touch Embedded Solutions (Xiamen) CO., LTD.
Factory of Manufacturer: No. 60, Xinglin South Rd., Jimei District, Xiamen, Fujian 361022, China
Equipment Under Test (EUT):
EUT Name: Echelon Touch Screen
Model No.: ECHTES-156, ECHTES-215, ECHTES-238 ♣
♣ Please refer to section 2 of this report which indicates which item was actually tested and which were electrically identical.
Standard(s) : 47 CFR Part 15, Subpart C 15.247
Date of Receipt: 2021-05-26
Date of Test: 2021-06-08 to 2021-07-12
Date of Issue: 2021-07-17

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

Kobe Jian



Kobe Jian

EMC Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No. 198 Kexhu Road, Solentech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.ssgsgroup.com.cn
Guangzhou Branch Testing/Inspection EMC Laboratory. 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2021-07-17		Original

Authorized for issue by				
Tested By		 _____ Jim Li/Project Engineer		
Reviewed By		 _____ Ricky Liu/Reviewer		

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Conducted Peak Output Power		ANSI C63.10 (2013) Section 11.9.1	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Minimum 6dB Bandwidth		ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Power Spectrum Density		ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Band Edges Measurement		ANSI C63.10 (2013) Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions		ANSI C63.10 (2013) Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands		ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions		ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass

Note:

E.U.T./EUT means Equipment Under Test.

Pass means the test result passed the test standard requirement, please find the detailed decision rule in the report relative section.

♣ Declaration of EUT Family Grouping:

Model No.: ECHTES-156, ECHTES-215, ECHTES-238

According to the declaration from the applicant, the electrical circuit design, layout, components used and internal wiring were identical for all models, with only difference on the LCD panel size.

Therefore, only the model ECHTES-156 was tested.



3 Contents

	Page
1 Cover Page	1
2 Test Summary	3
3 Contents	4
4 General Information.....	6
4.1 Details of E.U.T.	6
4.2 Description of Support Units	6
4.3 Measurement Uncertainty	7
4.4 Test Location.....	7
4.5 Test Facility	8
4.6 Deviation from Standards.....	8
4.7 Abnormalities from Standard Conditions	8
4.8 Duty cycle of the EUT	9
5 Equipment List	11
6 Radio Spectrum Technical Requirement	14
6.1 Antenna Requirement	14
6.1.1 Test Requirement:	14
6.1.2 Conclusion	14
7 Radio Spectrum Matter Test Results	15
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz).....	15
7.1.1 E.U.T. Operation	15
7.1.2 Test Mode Description	15
7.1.3 Test Setup Diagram.....	15
7.1.4 Measurement Procedure and Data.....	16
7.2 Conducted Peak Output Power.....	19
7.2.1 E.U.T. Operation	19
7.2.2 Test Mode Description	19
7.2.3 Test Setup Diagram.....	19
7.2.4 Measurement Procedure and Data.....	19
7.3 Minimum 6dB Bandwidth	20
7.3.1 E.U.T. Operation	20
7.3.2 Test Mode Description	20
7.3.3 Test Setup Diagram.....	20
7.3.4 Measurement Procedure and Data.....	20
7.4 Power Spectrum Density.....	21
7.4.1 E.U.T. Operation	21
7.4.2 Test Mode Description	21
7.4.3 Test Setup Diagram.....	21
7.4.4 Measurement Procedure and Data.....	21
7.5 Conducted Band Edges Measurement	22
7.5.1 E.U.T. Operation	22
7.5.2 Test Mode Description	22
7.5.3 Test Setup Diagram.....	22



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.5.4	Measurement Procedure and Data.....	22
7.6	Conducted Spurious Emissions	23
7.6.1	E.U.T. Operation	23
7.6.2	Test Mode Description	23
7.6.3	Test Setup Diagram	23
7.6.4	Measurement Procedure and Data.....	23
7.7	Radiated Emissions which fall in the restricted bands	24
7.7.1	E.U.T. Operation	24
7.7.2	Test Mode Description	24
7.7.3	Test Setup Diagram	25
7.7.4	Measurement Procedure and Data.....	26
7.8	Radiated Spurious Emissions	43
7.8.1	E.U.T. Operation	43
7.8.2	Test Mode Description	43
7.8.3	Test Setup Diagram	44
7.8.4	Measurement Procedure and Data.....	45
8	Appendix.....	72
8.1	Appendix A: DTS Bandwidth.....	72
8.1.1	Test Result.....	72
8.1.2	Test Graphs	73
8.2	Appendix B: Maximum conducted output power.....	91
8.2.1	Test Result.....	91
8.3	Appendix C: Maximum power spectral density	92
8.3.1	Test Result.....	92
8.3.2	Test Graphs	93
8.4	Appendix D: Band edge measurements	105
8.4.1	Test Result.....	105
8.4.2	Test Graphs	106
8.5	Appendix E: Conducted Spurious Emission	114
8.5.1	Test Result.....	114
8.5.2	Test Graphs	116
8.6	Appendix F: Duty Cycle.....	152
8.6.1	Test Result.....	152
8.6.2	Test Graphs	153



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

4 General Information

4.1 Details of E.U.T.

Power supply: DC 12 V powered by SWITCHING ADAPTER as below:
MODEL: SOY-1200500-327
INPUT:100-240VAC~, 50/60Hz, 1.7A Max
OUTPUT:12.0V, 5.0A, 60.0W

Cable(s): AC mains for adapter:3 wires, 1.8m, unshielded
DC input for main unit:1.8m, with ferrite bead
DC IN Port
USB Port
USB/OTG Port
TF Card Slot
HDMI Port
LAN Port
LINE OUT Port
DC OUT Port
3.5mm Headphone Jack

Operation Frequency: 802.11b/g/n(HT20): 2412MHz to 2462MHz
802.11n(HT40): 2422MHz to 2452MHz

Modulation Type: 802.11b: DSSS (CCK, DQPSK, DBPSK)
802.11g/n: OFDM (64QAM, 16QAM, QPSK, BPSK)

Number of Channels: 802.11b/g/n(HT20):11
802.11n(HT40):7

Channel Spacing: 5MHz

Antenna Type: PCB Antenna
Antenna 1: 2 dBi for 2.4G band

Antenna gain: Antenna 2: 2 dBi for 2.4G band
Two antennas support MIMO synchronous transmission for 801.11n

Firmware Version: MTB-818 V1-2 C002B002-20210610

Hardware Version: rk3288_mtb818

Testing Software: WLAN Test

Sample NO.: 119C105921

Power Setting: 5dBm can not be changed by user.

Function: Media PAD with 2.4G Wi-Fi function.

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Mobile Phone	SAMSUNG	SM-G9810	RFCN309Q9QF
Note Book PC	LENOVO	Lenovo Xiaoxinchao 5000	PF0TLJX7



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

4.3 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Emissions at AC Power Line (150kHz-30MHz)	$\pm 3.12\text{dB}$
Conducted Peak Output Power	$\pm 0.75\text{dB}$
Minimum 6dB Bandwidth	$\pm 3\%$
Power Spectrum Density	$\pm 2.84\text{dB}$
Conducted Band Edges Measurement	$\pm 0.75\text{dB}$
Conducted Spurious Emissions	$\pm 0.75\text{dB}$
Radiated Emissions which fall in the restricted bands	$\pm 4.5\text{dB}$ (Below 1GHz); $\pm 4.8\text{dB}$ (Above 1GHz)
Radiated Spurious Emissions	$\pm 5.06\text{dB}$ (3m); $\pm 4.46\text{dB}$ (10m)

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou Branch EMC Laboratory,
198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District,
Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. No.198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
Guangzhou Branch EMC Laboratory, 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP (Lab Code: 200611-0)**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

- **ACMA**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian/New Zealand Regulatory Compliance Mark (RCM).

- **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

- **CNAS (Lab Code: L0167)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAS-CL01:2018 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2017 General Requirements) for the Competence of Testing Laboratories.

- **FCC Recognized Accredited Test Firm(Registration No.: 486818)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been accredited and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation Number: CN5016, Test Firm Registration Number: 486818.

- **ISED (Registration No.: 4620B, CAB identifier: CN0052)**

SGS-CSTC Standards Technical Services Co., Ltd., has been registered by Innovation Science and Economic Development Canada for Wireless Device Testing laboratories to test to Canadian radio equipment requirements. Registration No. 4620B, CAB identifier: CN0052.

- **VCCI (Registration No.: R-12460, C-12584, G-20107 and T-11179)**

The 10m Semi-anechoic chamber, 966 Anechoic Chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-12460, C-12584, G-20107 and T-11179 respectively.

- **CBTL (Lab Code: TL129)**

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2017, the Basic Rules, IECEE 01 and Rules of procedure IECEE 02, and the relevant IECEE CB-Scheme Operational documents.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



4.8 Duty cycle of the EUT

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle.

All duty cycle is pre-scanned and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percent.

Formula:

$$\text{Duty Cycle} = \text{Ton}/(\text{Ton}+\text{Toff})$$

Measurement Procedure:

1. Set span = Zero
2. RBW=8MHz
3. VBW=8MHz
4. Detector=Peak

Test Mode	Antenna	Channel(MHz)	Duty Cycle [%]	Correction Factor(dB)*
11B	Ant1	2412	96.00	0.177
	Ant2	2412	96.00	0.177
	Ant1	2442	96.01	0.177
	Ant2	2442	96.01	0.177
	Ant1	2462	96.00	0.177
	Ant2	2462	96.01	0.177
11G	Ant1	2412	80.05	0.966
	Ant2	2412	80.04	0.966
	Ant1	2442	80.04	0.966
	Ant2	2442	80.00	0.969
	Ant1	2462	80.00	0.969
	Ant2	2462	80.04	0.966
11N20SISO	Ant1	2412	78.91	1.029
	Ant2	2412	78.86	1.031
	Ant1	2442	78.91	1.029
	Ant2	2442	78.91	1.029
	Ant1	2462	78.86	1.031
	Ant2	2462	78.91	1.029
11N40SISO	Ant1	2422	64.75	1.887
	Ant2	2422	64.75	1.887
	Ant1	2442	64.75	1.887
	Ant2	2442	64.75	1.887
	Ant1	2452	64.75	1.887
	Ant2	2452	64.75	1.887
11N20MIMO	Ant1	2412	78.86	1.031
	Ant2	2412	78.91	1.029
	Ant1	2442	78.91	1.029
	Ant2	2442	78.91	1.029



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

11N40MIMO	Ant1	2462	78.91	1.029
	Ant2	2462	78.91	1.029
	Ant1	2422	64.75	1.887
	Ant2	2422	64.75	1.887
	Ant1	2442	64.75	1.887
	Ant2	2442	64.75	1.887
	Ant1	2452	64.75	1.887
	Ant2	2452	64.75	1.887

*Correction Factor(dB) =10log(1/Duty Cycle)

Please refer to appendix for details.

5 Equipment List

Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Shielding Room	ChangZhou ZhongYu	8m x 3m x 3.8m	EMC0306	N/A	N/A
Two-Line V-Network	Rohde & Schwarz	ENV216	EMC0118	2021-01-08	2022-01-06
Two-Line V-Network-GZ	Rohde & Schwarz	ENV216	EMC2135	2020-09-25	2021-09-24
Coaxial Cable	HangTianXing	2m	EMC0107	2020-09-09	2022-09-08
Test Software E3c	Audix	Ver. 5.4.1221b	GZE100-62	N/A	N/A
EMI Test Receiver(9kHz-3.6GHz)	Rohde & Schwarz	ESR4	EMC2221	2021/6/1	2022/5/31

Conducted Peak Output Power					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
MXA Signal Analyzer(10Hz-8.4GHz)	Agilent Technologies	N9020A	SEM004-10	2021-03-02	2022-03-01
ESG Vector Signal Generator(250kHz-6GHz)	Keysight	E4438C	SEM006-03	2021-03-12	2022-03-11
EXG Analog Signal Generator(9kHz-3GHz)	Agilent Technologies	N5171B	SEM006-04	2020-07-15	2021-07-14
Power Meter (U2021XA_Ch2)	Agilent Technologies	U2021XA_Ch2	SEM009-02	2021-05-19	2022-05-18
Power Meter (U2021XA_Ch3)	Agilent Technologies	U2021XA_Ch3	SEM009-03	2021-05-19	2022-05-18
EXA Signal Analyzer(10Hz-44GHz)	Agilent Technologies	N9010A	EMC2138	2020-09-17	2021-09-16
6dB Attenuator	HP	8491A	EMC2062	2020-04-15	2022-04-14
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01
MI CABLE	SGS-EMC	0.8M	EMC2137	2019-11-02	2021-11-01

Minimum 6dB Bandwidth					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer(10Hz-44GHz)	Agilent Technologies	N9010A	EMC2138	2020-09-17	2021-09-16
6dB Attenuator	HP	8491A	EMC2062	2020-04-15	2022-04-14
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Power Spectrum Density					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer(10Hz-44GHz)	Agilent Technologies	N9010A	EMC2138	2020-09-17	2021-09-16
6dB Attenuator	HP	8491A	EMC2062	2020-04-15	2022-04-14
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01

Conducted Band Edges Measurement					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer(10Hz-44GHz)	Agilent Technologies	N9010A	EMC2138	2020-09-17	2021-09-16
6dB Attenuator	HP	8491A	EMC2062	2020-04-15	2022-04-14
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01

Conducted Spurious Emissions					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer(10Hz-44GHz)	Agilent Technologies	N9010A	EMC2138	2020-09-17	2021-09-16
6dB Attenuator	HP	8491A	EMC2062	2020-04-15	2022-04-14
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01

Radiated Emissions which fall in the restricted bands					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI Test Receiver(20Hz-26.5GHz)	Rohde & Schwarz	ESIB26	EMC0522	2021-01-08	2022-01-07
Chamber cable(Above 1GHz)	Scoflex	KMKM-8.0m	EMC0545	2020/9/9	2022/9/8
Horn Antenna(1GHz-18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	EMC2026	2019-09-25	2022-09-24
1GHz-26.5 GHz Pre-Amplifier	Agilent	8449B	EMC0521	2021-01-08	2022-01-07
2.4GHz Filter	Micro-Tronics	BRM 50702	EMC2069	2021-01-08	2022-01-07
966 Anechoic Chamber	C.R.T	9m x 6m x 6m	EMC2142	2020-12-20	2023-12-19
MXE EMI Receiver(10Hz-8.4GHz)	Keysight	N9038A	EMC2139	2020-11-13	2021-11-12
EXA Signal Analyzer(10Hz-44GHz)	Keysight	N9010A	EMC2138	2020-09-17	2021-09-16
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. No. 198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgs.com.cn
Guangzhou Branch Testing Laboratory, 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

Notch Filter (5150-5880)	Mico-Tronics	BRM50716	EMC2168	2020-07-29	2021-07-28
Horn Antenna(14-40GHz)	SCHWARZBECK	BBHA 9170	EMC2041	2020-06-28	2023-06-27
Microwave Broadband Preamplifier (18-40GHz)	SCHWARZBECK	BBV 9721	EMC2172	2020-09-09	2021-09-08

Radiated Spurious Emissions					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Chamber cable (Above 1GHz)	Scoflex	KMKM-8.0m	EMC0545	2020/9/9	2022-09-08
Horn Antenna(1GHz-18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	EMC2026	2019-09-25	2022-09-24
1GHz-26.5 GHz Pre-Amplifier	Agilent	8449B	EMC0521	2021-01-08	2022-01-07
2.4GHz Filter	Micro-Tronics	BRM 50702	EMC2069	2021-01-08	2022-01-07
966 Anechoic Chamber	C.R.T	9m x 6m x 6m	EMC2142	2020-12-20	2023-12-19
MXE EMI Receiver(10Hz-8.4GHz)	Keysight	N9038A	EMC2139	2020-11-13	2021-11-12
EXA Signal Analyzer(10Hz-44GHz)	Keysight	N9010A	EMC2138	2020-09-17	2021-09-16
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A
Notch Filter (5150-5880)	Mico-Tronics	BRM50716	EMC2168	2020-07-29	2021-07-28
Signal Analyzer (20Hz-26.5GHz)	Rohde & Schwarz	FISQ 26	EMC0069	2020/11/13	2021-11-12

General used equipment					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DMM	Fluke	73	EMC0006	2021-07-05	2022-07-05
DMM	Fluke	73	EMC0007	2021-07-05	2022-07-05



6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

6.1.2 Conclusion

Standard Requirement:

Testing shall be performed using the highest gain antenna of each combination of licence-exempt transmitter and antenna type, with the transmitter output power set at the maximum level.

When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna manufacturer.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The 2 antennas are integrated on the main PCB and no consideration of replacement. The best case gain of both antennas are 2 dBi.

Please refer to internal photos.

EUT support 2x2 MIMO for 802.11n, any transmit signals are correlated with each other, as unequal antenna gains for antenna 1 and antenna 2 but with equal transmit power, therefore,

$$\text{Directional gain} = G_{\text{ANT}} + 10 \log (N_{\text{ANT}}) \text{ dBi}$$

Directional gain= 2+10log (2) dBi=5.01 dBi

7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 22.8 °C


Humidity: 52 % RH

Atmospheric Pressure: 1010 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.

7.1.3 Test Setup Diagram

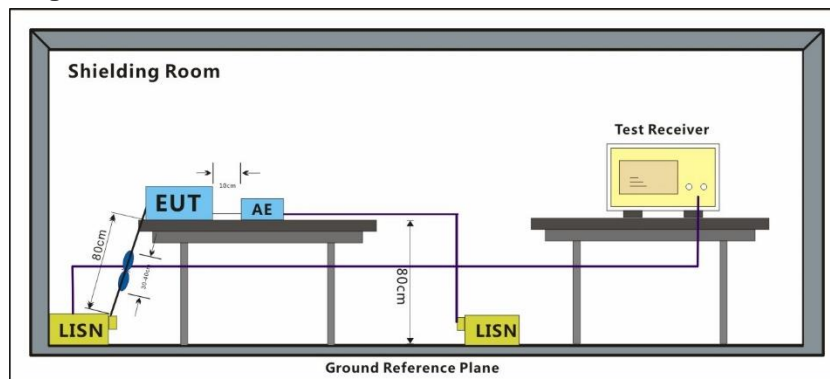

7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.


Remark: LISN=Read Level+ Cable Loss+ LISN Factor



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 05; Line: Live line

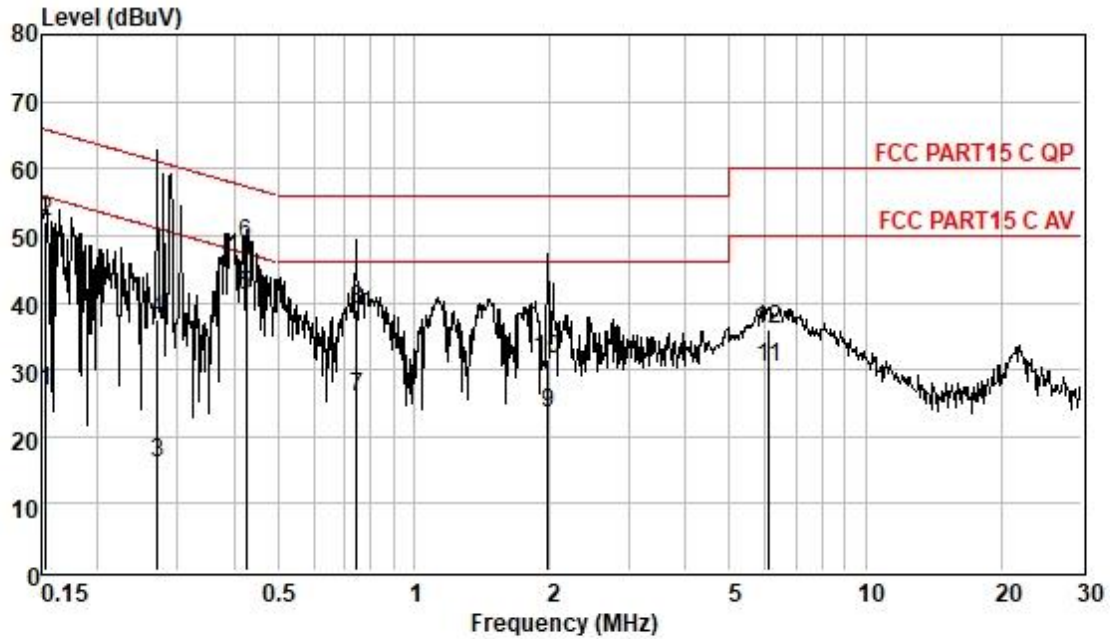Pol : LINE
Mode :
Model : 156

Frequency MHz	Read Level dBuV	Cable Loss dB	LISN Factor dB	Measured Level dBuV	Limit Line dBuV	Over Limit dB	Remark
0.15	17.05	0.06	9.62	26.73	55.82	-29.09	Average
0.15	42.36	0.06	9.62	52.04	65.82	-13.78	QP
0.27	6.26	0.06	9.62	15.94	51.07	-35.13	Average
0.27	27.92	0.06	9.62	37.60	61.07	-23.47	QP
0.43	31.38	0.06	9.62	41.06	47.33	-6.27	Average
0.43	38.97	0.06	9.62	48.65	57.33	-8.68	QP
0.75	16.31	0.07	9.63	26.01	46.00	-19.99	Average
0.75	29.28	0.07	9.63	38.98	56.00	-17.02	QP
1.98	13.61	0.12	9.62	23.35	46.00	-22.65	Average
1.98	21.70	0.12	9.62	31.44	56.00	-24.56	QP
6.12	20.61	0.20	9.67	30.48	50.00	-19.52	Average
6.12	26.13	0.20	9.67	36.00	60.00	-24.00	QP

Test Mode: 05; Line: Neutral Line

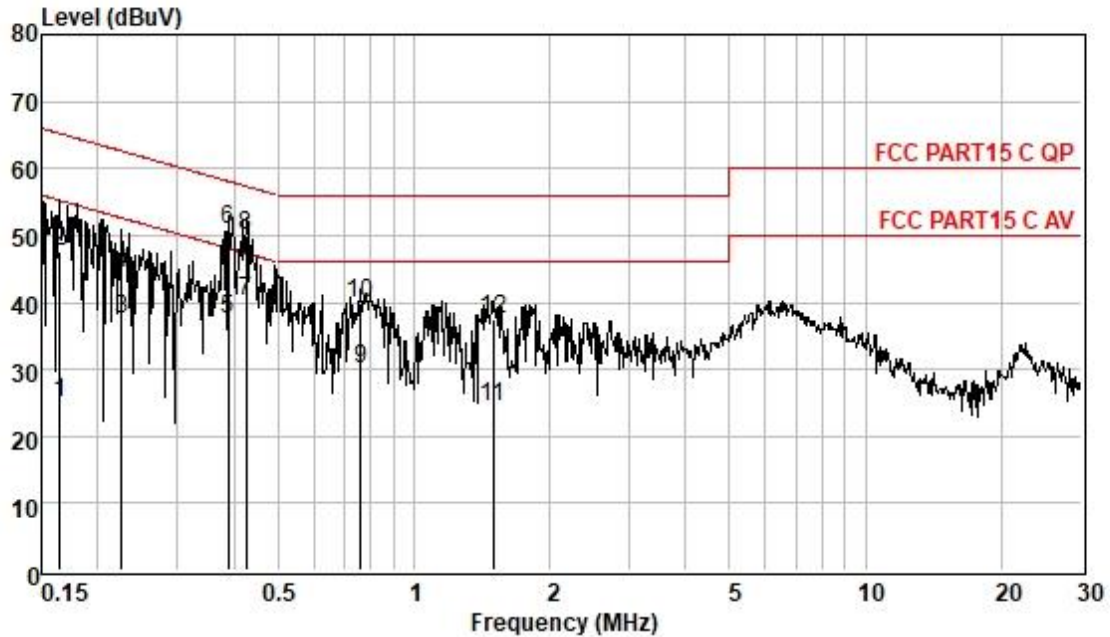Pol : NEUTRAL
Mode :
Model : 156

Frequency MHz	Read Level dBuV	Cable Loss dB	LISN Factor dB	Measured Level dBuV	Limit Line dBuV	Over Limit dB	Remark
0.17	15.50	0.06	9.55	25.11	55.21	-30.10	Average
0.17	37.88	0.06	9.55	47.49	65.21	-17.72	QP
0.23	27.95	0.06	9.55	37.56	52.61	-15.05	Average
0.23	34.68	0.06	9.55	44.29	62.61	-18.32	QP
0.39	28.00	0.06	9.56	37.62	48.08	-10.46	Average
0.39	41.38	0.06	9.56	51.00	58.08	-7.08	QP
0.43	30.40	0.06	9.56	40.02	47.33	-7.31	Average
0.43	40.34	0.06	9.56	49.96	57.33	-7.37	QP
0.76	20.46	0.07	9.55	30.08	46.00	-15.92	Average
0.76	30.20	0.07	9.55	39.82	56.00	-16.18	QP
1.50	14.71	0.10	9.55	24.36	46.00	-21.64	Average
1.50	27.70	0.10	9.55	37.35	56.00	-18.65	QP

7.2 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)

Test Method: ANSI C63.10 (2013) Section 11.9.1.3

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 29.6 °C

Humidity: 53.3 % RH


Atmospheric Pressure: 1005 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
--------------------------	--------------	-------------

Final test	05	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.
------------	----	--

7.2.3 Test Setup Diagram

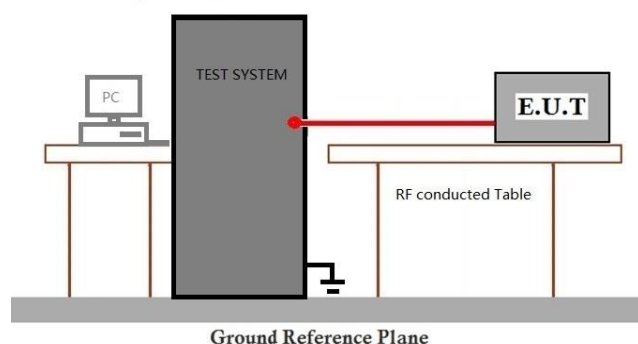

7.2.4 Measurement Procedure and Data

Please Refer To Appendix For Details

7.3 Minimum 6dB Bandwidth

Test Requirement	47 CFR Part 15, Subpart C 15.247a(2)
Test Method:	ANSI C63.10 (2013) Section 11.8.1
Limit:	≥500 kHz

7.3.1 E.U.T. Operation


Operating Environment:

Temperature: 29.6 °C Humidity: 53.3 % RH Atmospheric Pressure: 1005 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.

7.3.3 Test Setup Diagram

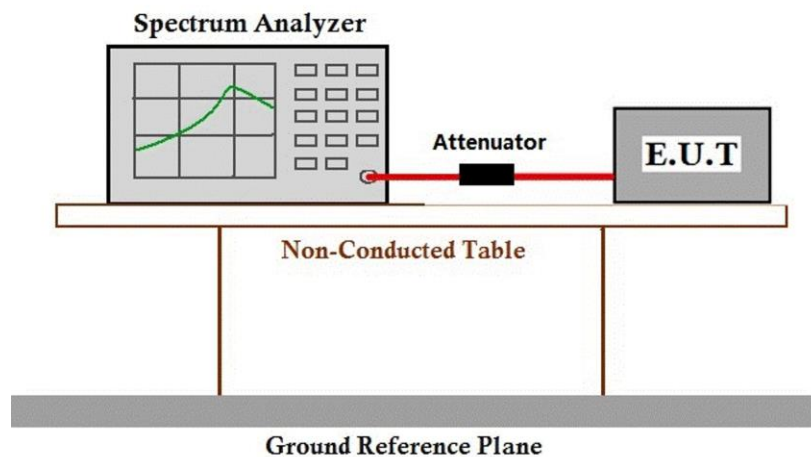

7.3.4 Measurement Procedure and Data

Please Refer To Appendix For Details

7.4 Power Spectrum Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)
Test Method: ANSI C63.10 (2013) Section 11.10.2
Limit: ≤8dBm in any 3 kHz band during any time interval of continuous transmission


7.4.1 E.U.T. Operation

Operating Environment:
Temperature: 29.6 °C Humidity: 53.3 % RH Atmospheric Pressure: 1005 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.

7.4.3 Test Setup Diagram

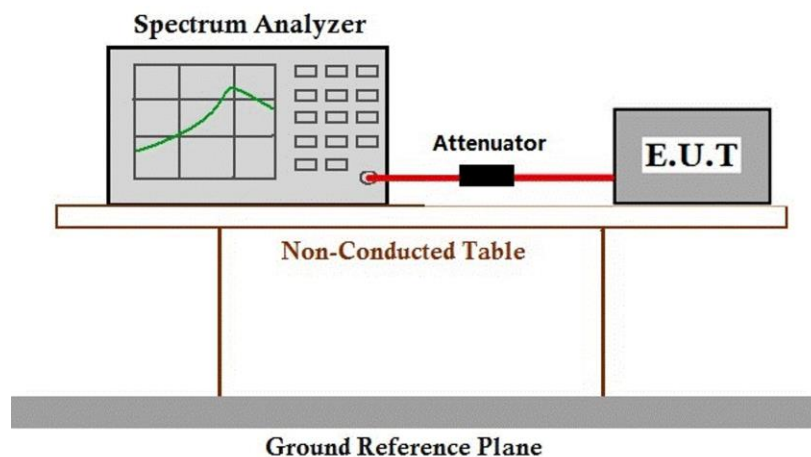

7.4.4 Measurement Procedure and Data

Please Refer To Appendix For Details



7.5 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)
Test Method: ANSI C63.10 (2013) Section 11.13.3.2
Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


7.5.1 E.U.T. Operation

Operating Environment:
Temperature: 29.6 °C Humidity: 53.3 % RH Atmospheric Pressure: 1005 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.

7.5.3 Test Setup Diagram

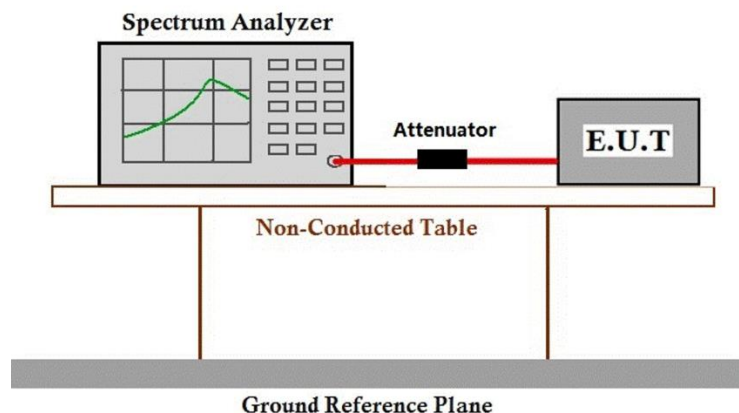

7.5.4 Measurement Procedure and Data

Please Refer To Appendix For Details

7.6 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 11.11

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 29.6 °C

Humidity: 53.3 % RH


Atmospheric Pressure: 1005 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
--------------------------	--------------	-------------

Final test	05	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.
------------	----	--

7.6.3 Test Setup Diagram

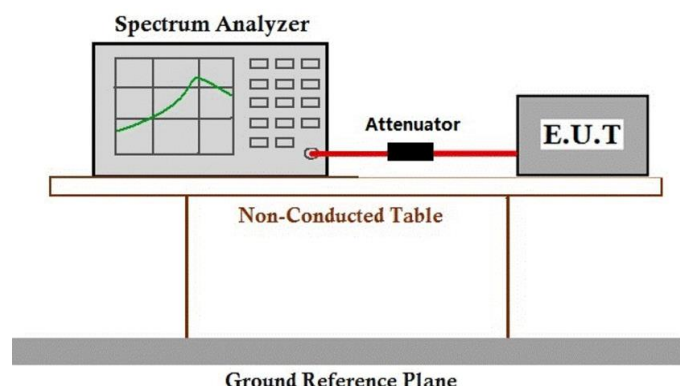

7.6.4 Measurement Procedure and Data

Please Refer To Appendix For Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
SGS-CSTC Standards Technical Services Co., Ltd. No.198 Kezhu Road, Sciotech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgs.com.cn
Guangzhou Branch EMC Laboratory 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

7.7 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.10.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 25.5 °C

Humidity: 65.8 % RH

Atmospheric Pressure: 1005 mbar


7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
--------------------------	--------------	-------------

Final test 05

TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.

7.7.3 Test Setup Diagram

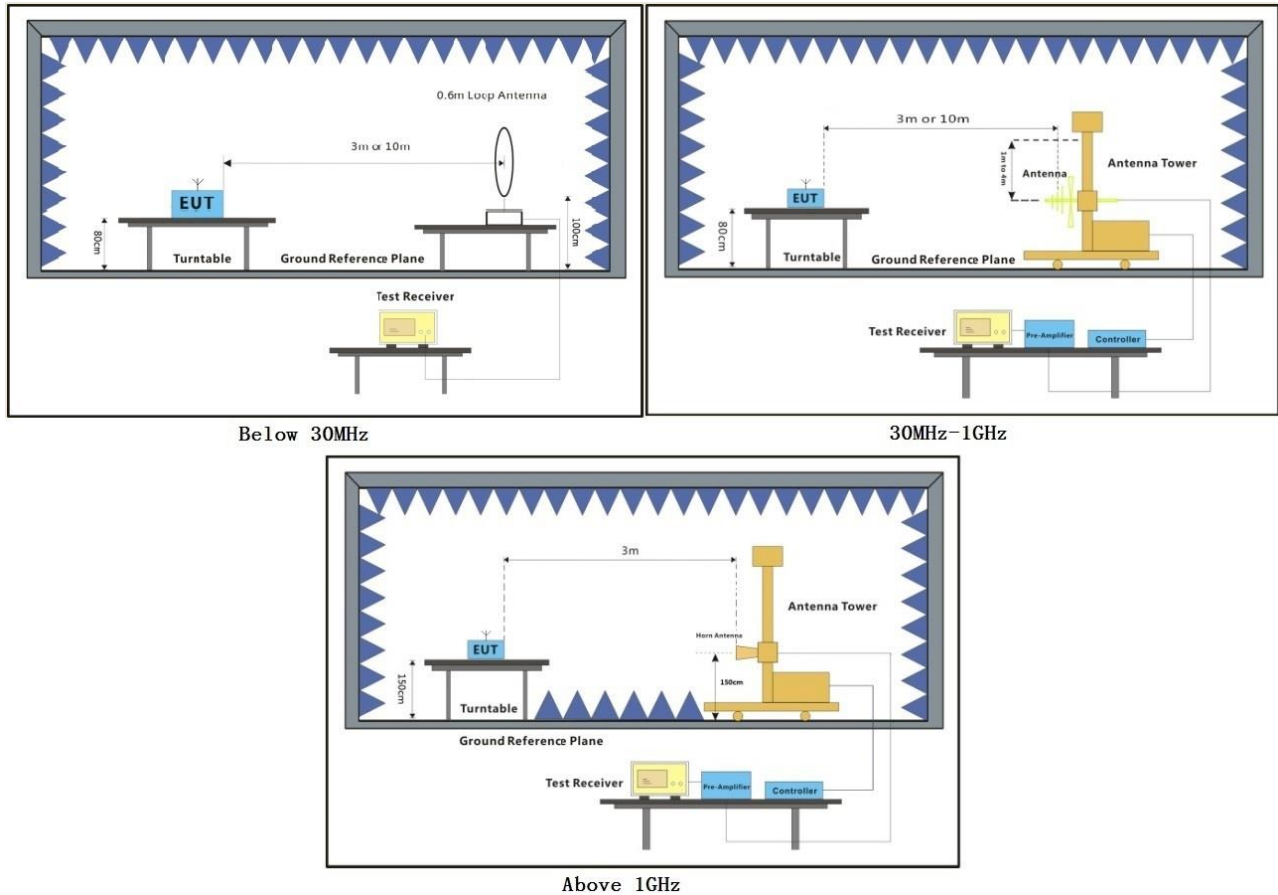

7.7.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.


Remark 3: Pretest the EUT at antenna 1 and antenna 2 and MIMO mode find antenna 1 for 802.11b/g and MIMO mode for 802.11n are the worst-case mode. only record the worst-case test data 802.11b/g/n in this report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 05; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:High;

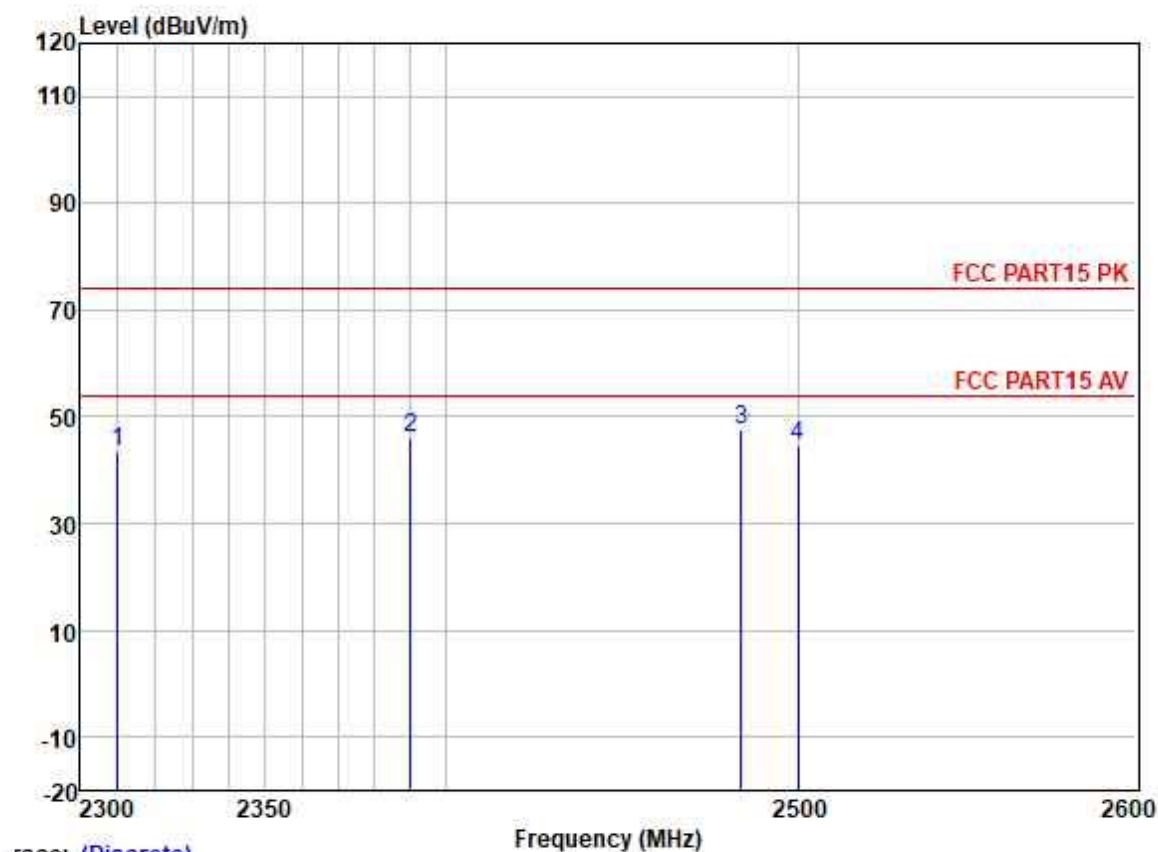

race: (Discrete)

	Freq	ReadAntenna	Cable Preamp		Limit	Over			
		Level Factor	Loss Factor	Level	Line	Limit	Pol/Phase	Remark	
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2310.000	50.62	27.15	3.32	37.62	43.47	74.00	-30.53	HORIZONTAL Peak
2	2390.000	52.84	27.33	3.48	37.59	46.06	74.00	-27.94	HORIZONTAL Peak
3	2483.500	54.31	27.48	3.53	37.57	47.75	74.00	-26.25	HORIZONTAL Peak
4	2500.000	51.09	27.50	3.40	37.56	44.43	74.00	-29.57	HORIZONTAL Peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed and available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to terms and Conditions of Sale and Conditions of Documents at <http://www.sgs.com/en/Terms-and-Conditions.aspx#Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch Testing Center EEC Laboratory.


中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 www.sqsgroup.com.cn
 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sqsg.china@sqs.com

Test Mode: 05; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:Low;

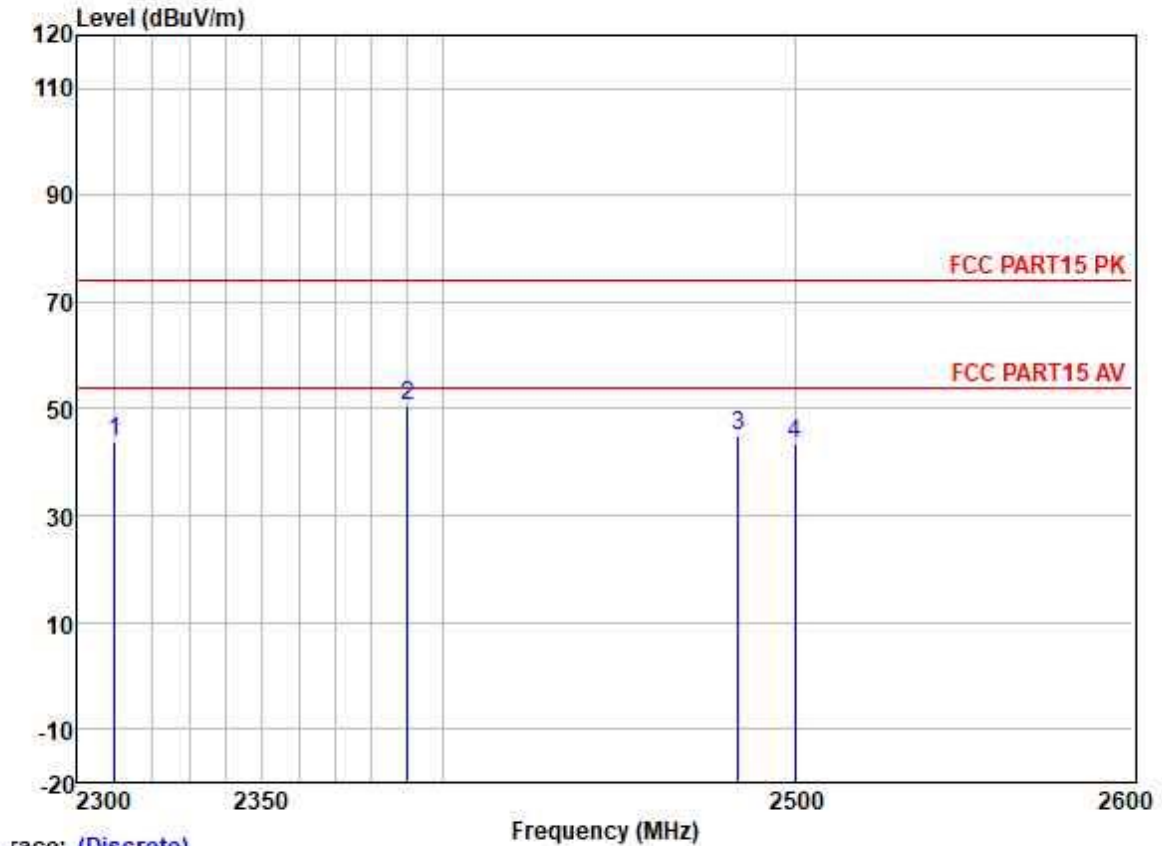

	Freq	ReadAntenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2310.000	51.09	27.15	3.32	37.62	43.94	74.00	-30.06
2	2390.000	57.50	27.33	3.48	37.59	50.72	74.00	-23.28
3	2483.500	51.58	27.48	3.53	37.57	45.02	74.00	-28.98
4	2500.000	50.24	27.50	3.40	37.56	43.58	74.00	-30.42


Test Mode: 05; Polarity: Horizontal; Modulation: 802.11g; Bandwidth: 20MHz; Channel: High;

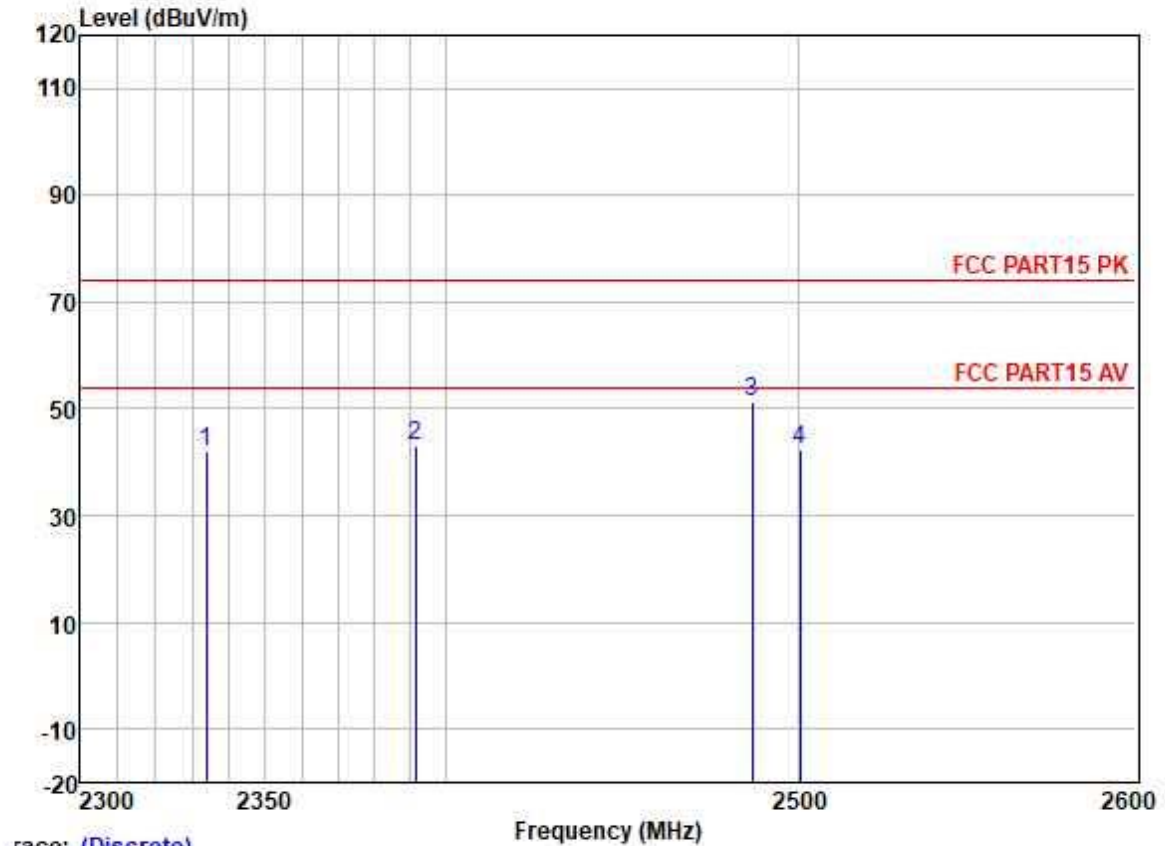

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2333.802	49.16	27.20	3.36	37.62	42.10	74.00	-31.90 HORIZONTAL Peak
2	2391.149	49.91	27.34	3.49	37.59	43.15	74.00	-30.85 HORIZONTAL Peak
3	2486.520	57.88	27.48	3.53	37.57	51.32	74.00	-22.68 HORIZONTAL Peak
4	2500.583	49.13	27.50	3.40	37.56	42.47	74.00	-31.53 HORIZONTAL Peak


Test Mode: 05; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:Low;

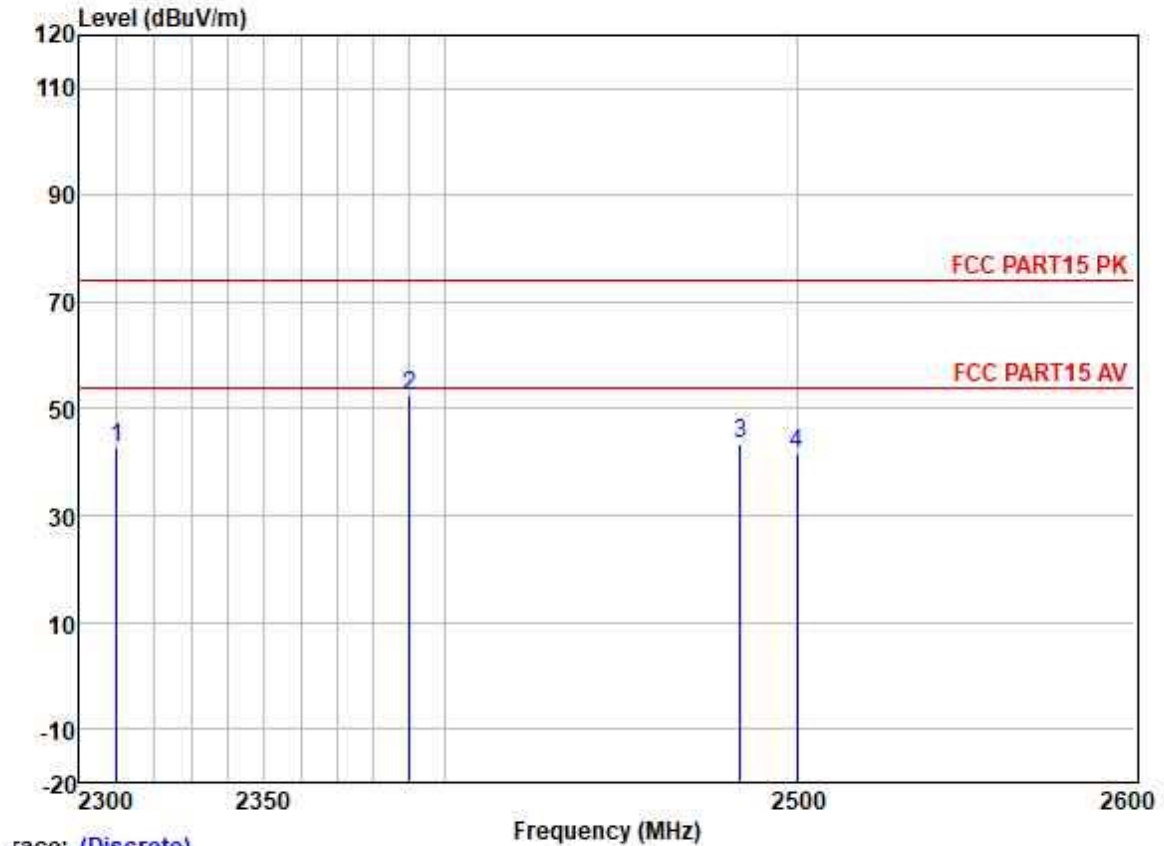

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2310.000	49.99	27.15	3.32	37.62	42.84	74.00	-31.16 HORIZONTAL Peak
2	2390.000	59.17	27.33	3.48	37.59	52.39	74.00	-21.61 HORIZONTAL Peak
3	2483.500	50.01	27.48	3.53	37.57	43.45	74.00	-30.55 HORIZONTAL Peak
4	2500.000	48.22	27.50	3.40	37.56	41.56	74.00	-32.44 HORIZONTAL Peak


Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High;

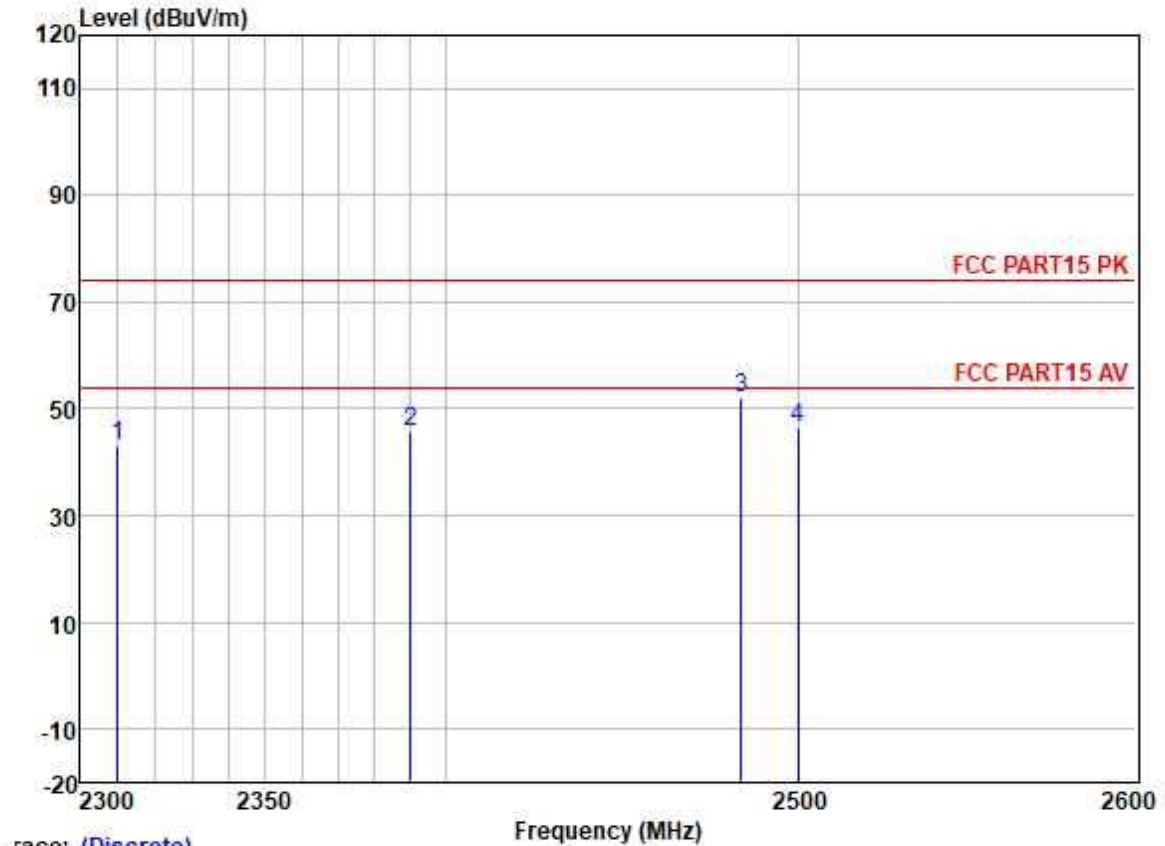

Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2310.000	50.38	27.15	3.32	37.62	43.23	74.00	-30.77	HORIZONTAL Peak
2	2390.000	52.47	27.33	3.48	37.59	45.69	74.00	-28.31	HORIZONTAL Peak
3	2483.500	58.80	27.48	3.53	37.57	52.24	74.00	-21.76	HORIZONTAL Peak
4	2500.000	52.94	27.50	3.40	37.56	46.28	74.00	-27.72	HORIZONTAL Peak


Test Mode: 05; Polarity: Horizontal; Modulation: 802.11n; Bandwidth: 20MHz; Channel: Low;

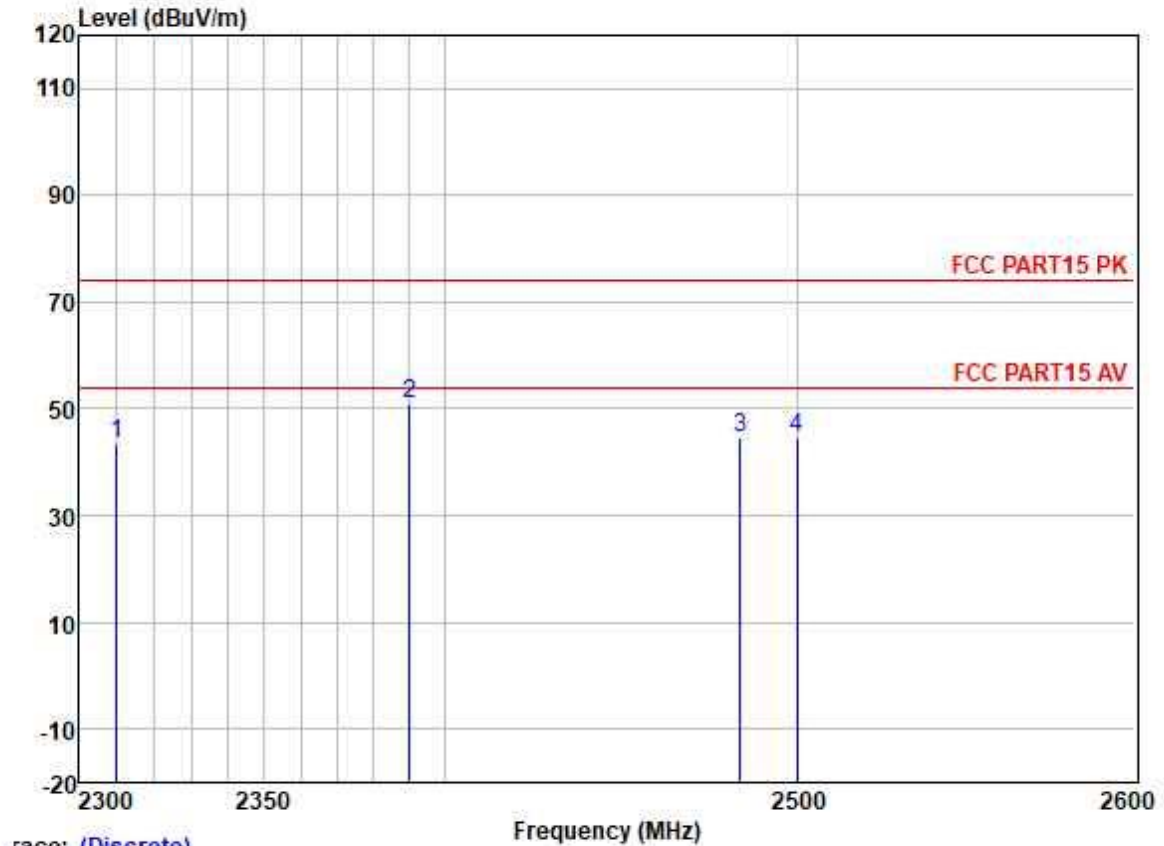

Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2310.000	50.49	27.15	3.32	37.62	43.34	74.00	-30.66	HORIZONTAL Peak
2	2390.000	57.75	27.33	3.48	37.59	50.97	74.00	-23.03	HORIZONTAL Peak
3	2483.500	51.09	27.48	3.53	37.57	44.53	74.00	-29.47	HORIZONTAL Peak
4	2500.000	51.09	27.50	3.40	37.56	44.43	74.00	-29.57	HORIZONTAL Peak

Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High;

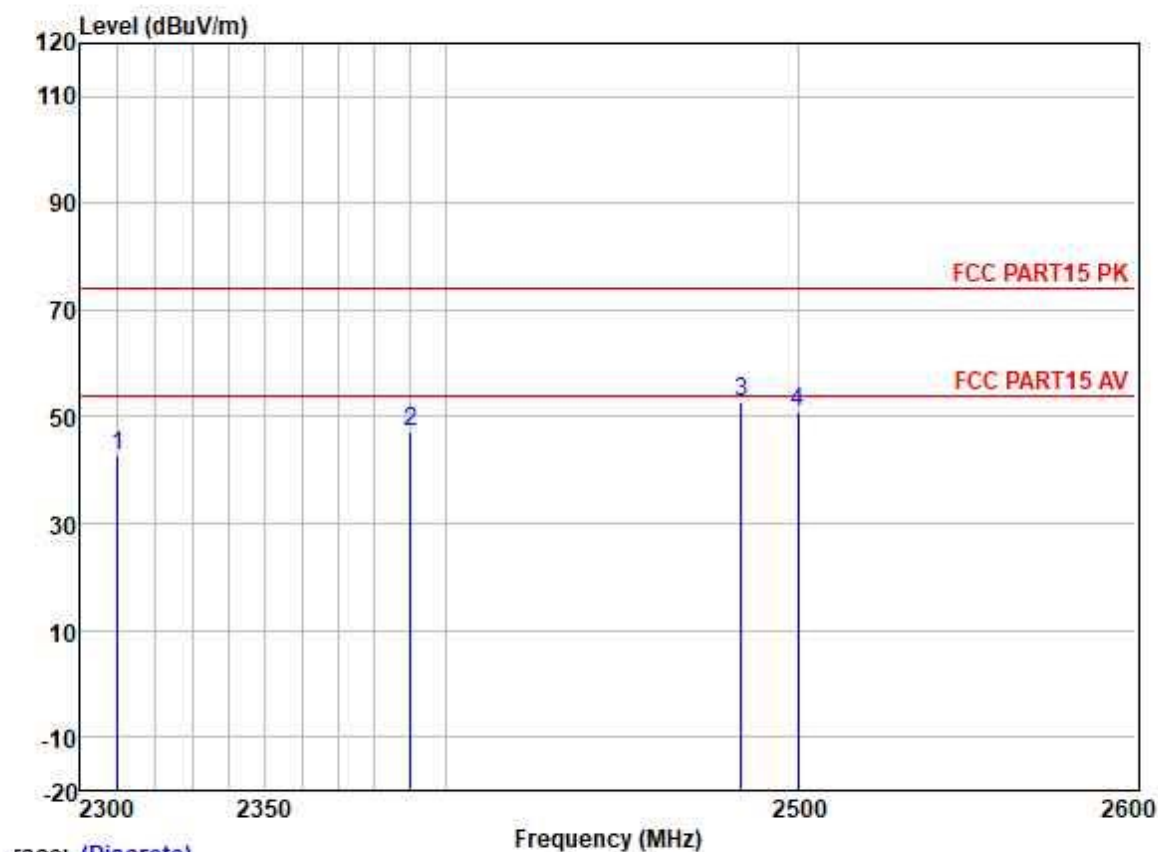

race: (Discrete)

	Freq	ReadAntenna	Cable Preamp			Limit	Over		
		Level Factor	Loss Factor	Level		Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2310.000	49.69	27.15	3.32	37.62	42.54	74.00	-31.46	HORIZONTAL Peak
2	2390.000	53.96	27.33	3.48	37.59	47.18	74.00	-26.82	HORIZONTAL Peak
3	2483.500	59.32	27.48	3.53	37.57	52.76	74.00	-21.24	HORIZONTAL Peak
4	2500.000	57.74	27.50	3.40	37.56	51.08	74.00	-22.92	HORIZONTAL Peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed and available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to terms and Conditions of Sale and Conditions of Documents at <http://www.sgs.com/en/Terms-and-Conditions.aspx#Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch Testing Center EEC Laboratory.

中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 www.sqsgroup.com.cn
 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sqsg.china@sqs.com


Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low;

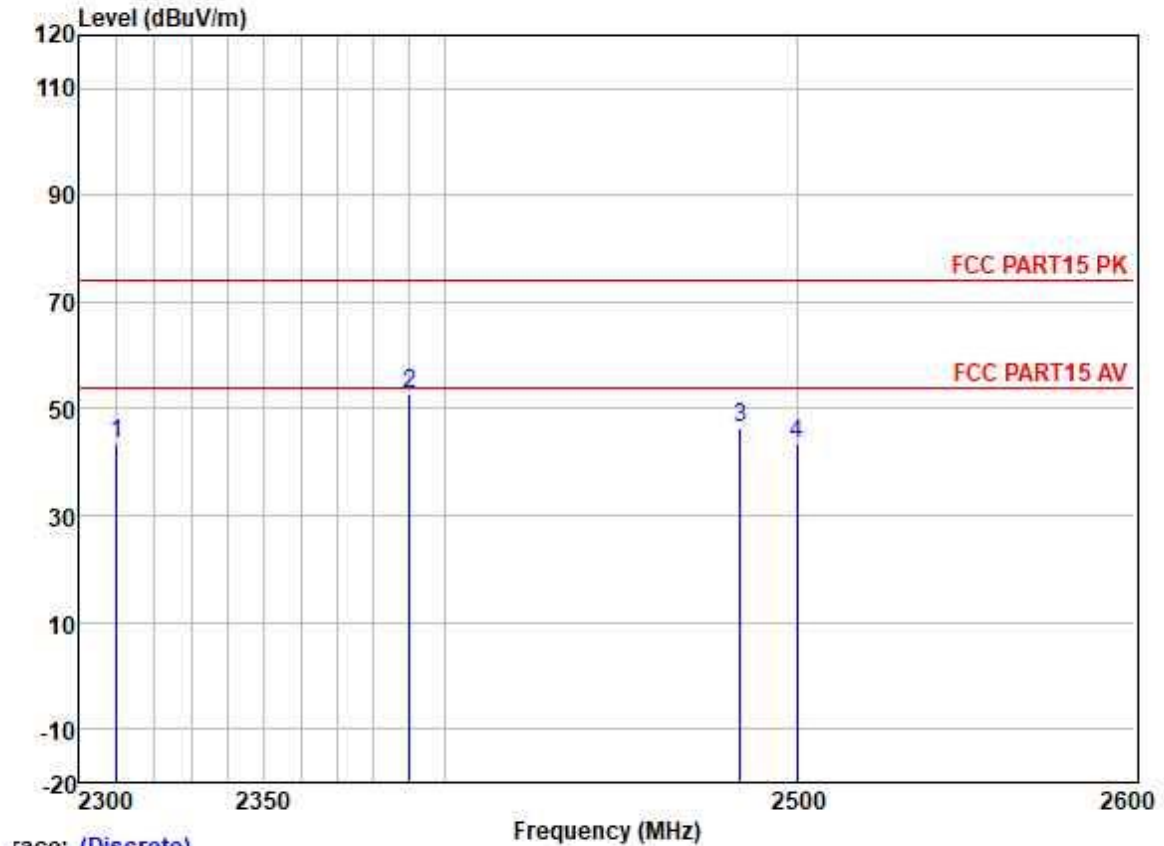

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2310.000	50.70	27.15	3.32	37.62	43.55	74.00	-30.45
2	2390.000	59.73	27.33	3.48	37.59	52.95	74.00	-21.05
3	2483.500	53.19	27.48	3.53	37.57	46.63	74.00	-27.37
4	2500.000	49.95	27.50	3.40	37.56	43.29	74.00	-30.71

Test Mode: 05; Polarity: Vertical; Modulation: 802.11b; Bandwidth: 20MHz; Channel: High;

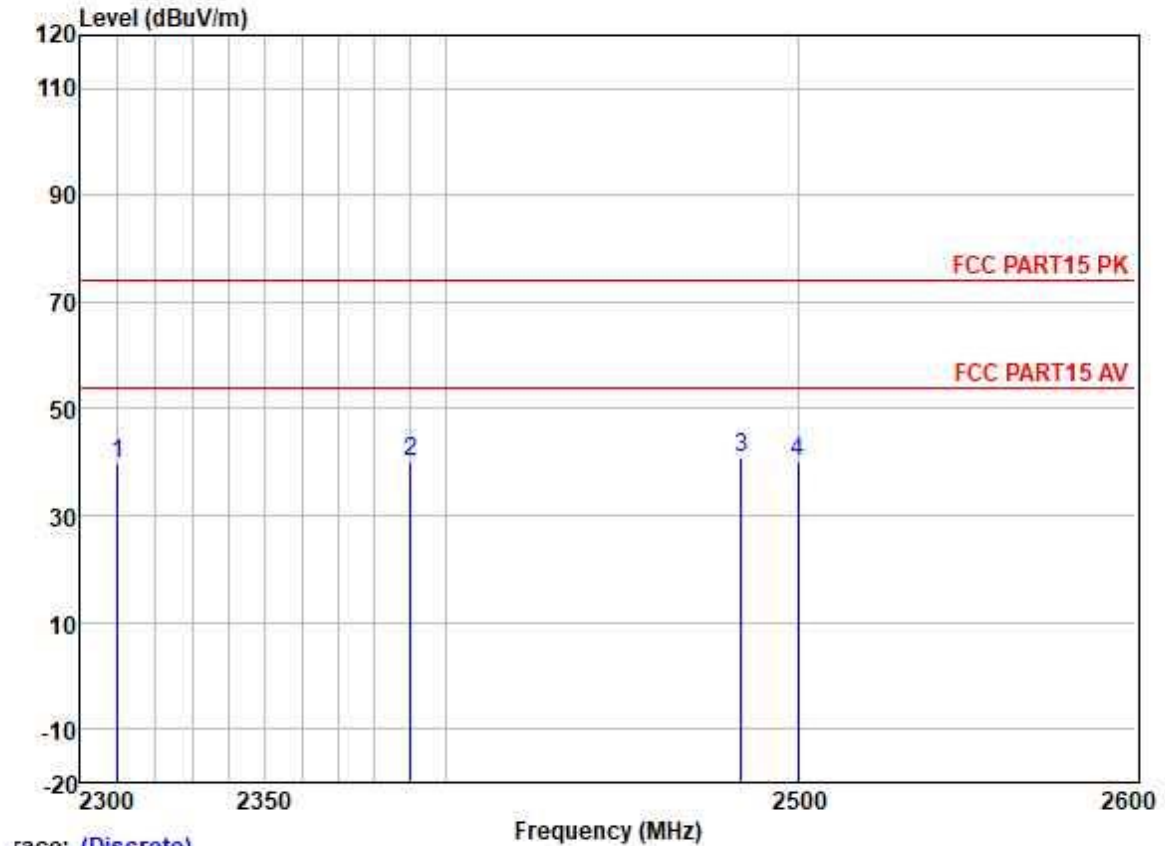


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.000	46.76	27.15	3.32	37.62	39.61	74.00	-34.39	VERTICAL	Peak
2	2390.000	46.95	27.33	3.48	37.59	40.17	74.00	-33.83	VERTICAL	Peak
3	2483.500	47.47	27.48	3.53	37.57	40.91	74.00	-33.09	VERTICAL	Peak
4	2500.000	46.65	27.50	3.40	37.56	39.99	74.00	-34.01	VERTICAL	Peak

Test Mode: 05; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:Low;

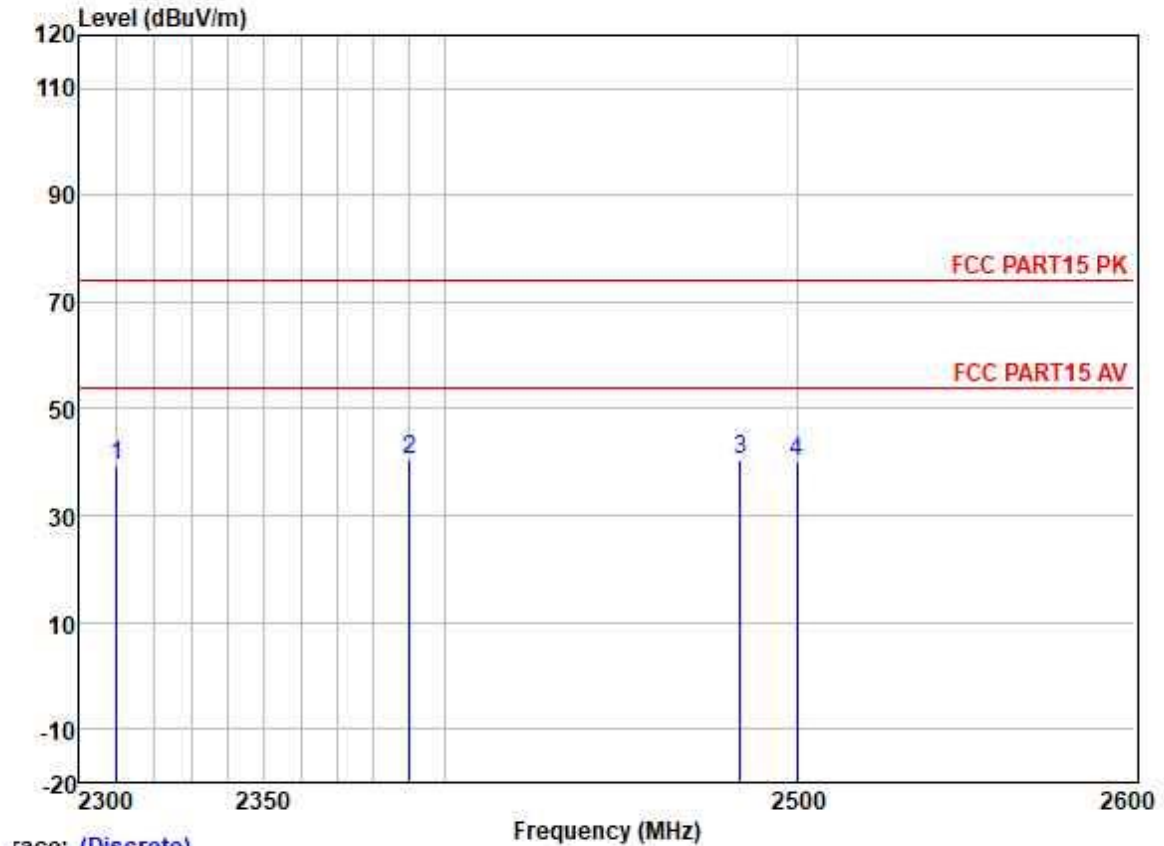

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.000	46.67	27.15	3.32	37.62	39.52	74.00	-34.48	VERTICAL	Peak
2	2390.000	47.19	27.33	3.48	37.59	40.41	74.00	-33.59	VERTICAL	Peak
3	2483.500	47.05	27.48	3.53	37.57	40.49	74.00	-33.51	VERTICAL	Peak
4	2500.000	46.61	27.50	3.40	37.56	39.95	74.00	-34.05	VERTICAL	Peak

Test Mode: 05; Polarity: Vertical; Modulation: 802.11g; Bandwidth: 20MHz; Channel: High;

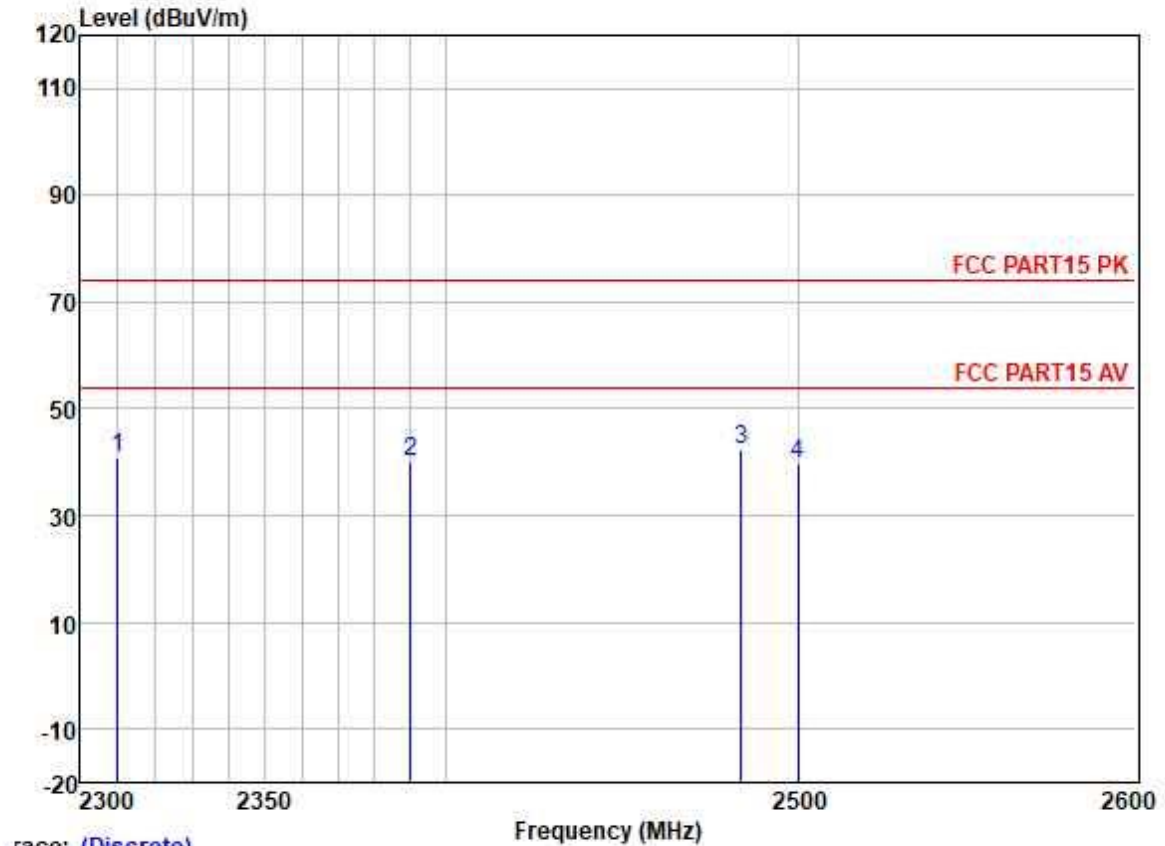

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.000	47.85	27.15	3.32	37.62	40.70	74.00	-33.30	VERTICAL	Peak
2	2390.000	46.99	27.33	3.48	37.59	40.21	74.00	-33.79	VERTICAL	Peak
3	2483.500	49.04	27.48	3.53	37.57	42.48	74.00	-31.52	VERTICAL	Peak
4	2500.000	46.49	27.50	3.40	37.56	39.83	74.00	-34.17	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 05; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:Low;

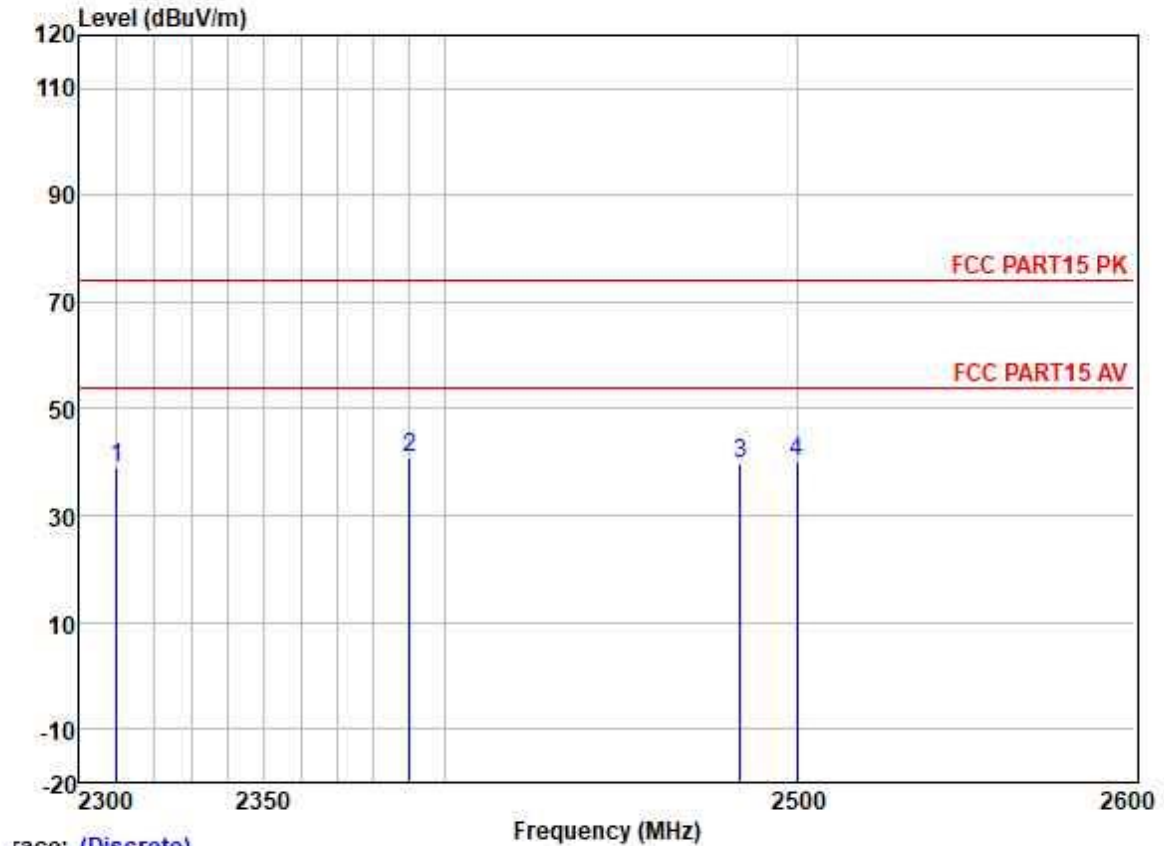

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.000	46.15	27.15	3.32	37.62	39.00	74.00	-35.00	VERTICAL	Peak
2	2390.000	47.74	27.33	3.48	37.59	40.96	74.00	-33.04	VERTICAL	Peak
3	2483.500	46.40	27.48	3.53	37.57	39.84	74.00	-34.16	VERTICAL	Peak
4	2500.000	46.83	27.50	3.40	37.56	40.17	74.00	-33.83	VERTICAL	Peak


Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High;

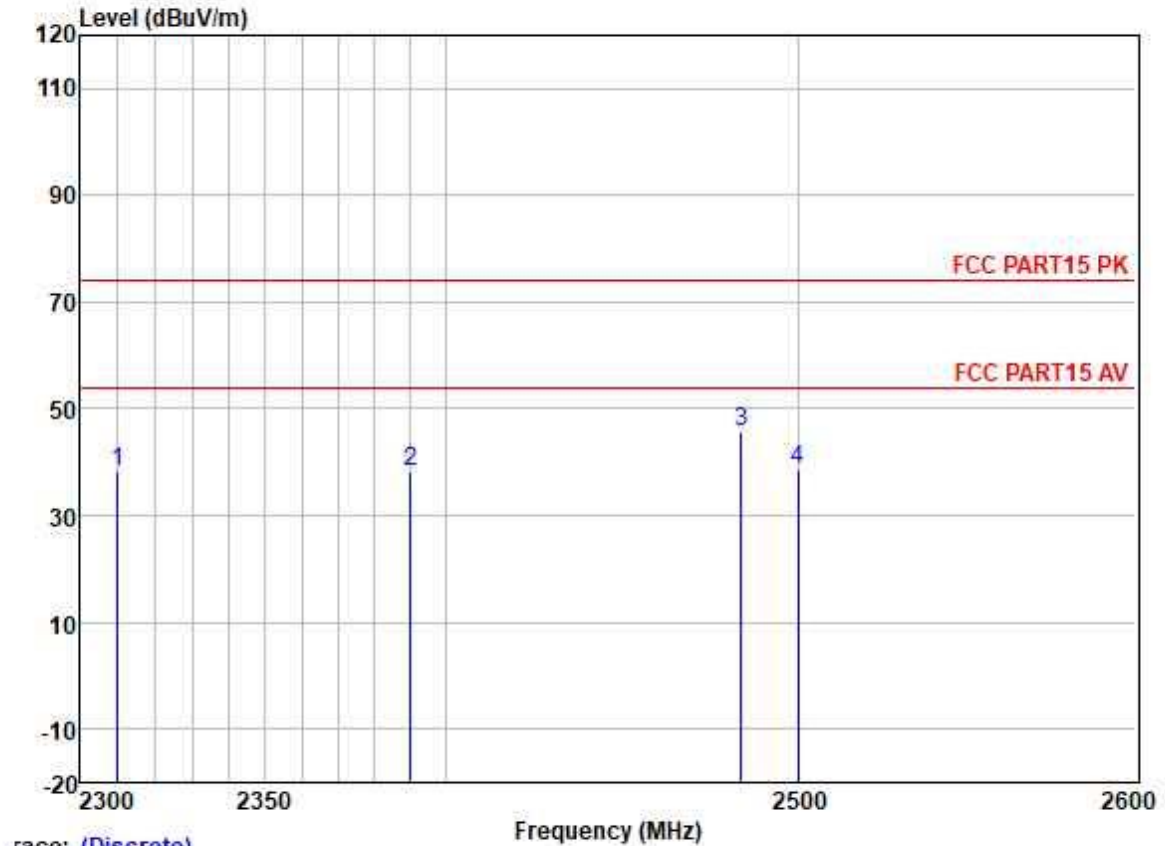

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.000	45.48	27.15	3.32	37.62	38.33	74.00	-35.67	VERTICAL	Peak
2	2390.000	45.19	27.33	3.48	37.59	38.41	74.00	-35.59	VERTICAL	Peak
3	2483.500	52.13	27.48	3.53	37.57	45.57	74.00	-28.43	VERTICAL	Peak
4	2500.000	45.25	27.50	3.40	37.56	38.59	74.00	-35.41	VERTICAL	Peak

Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low;

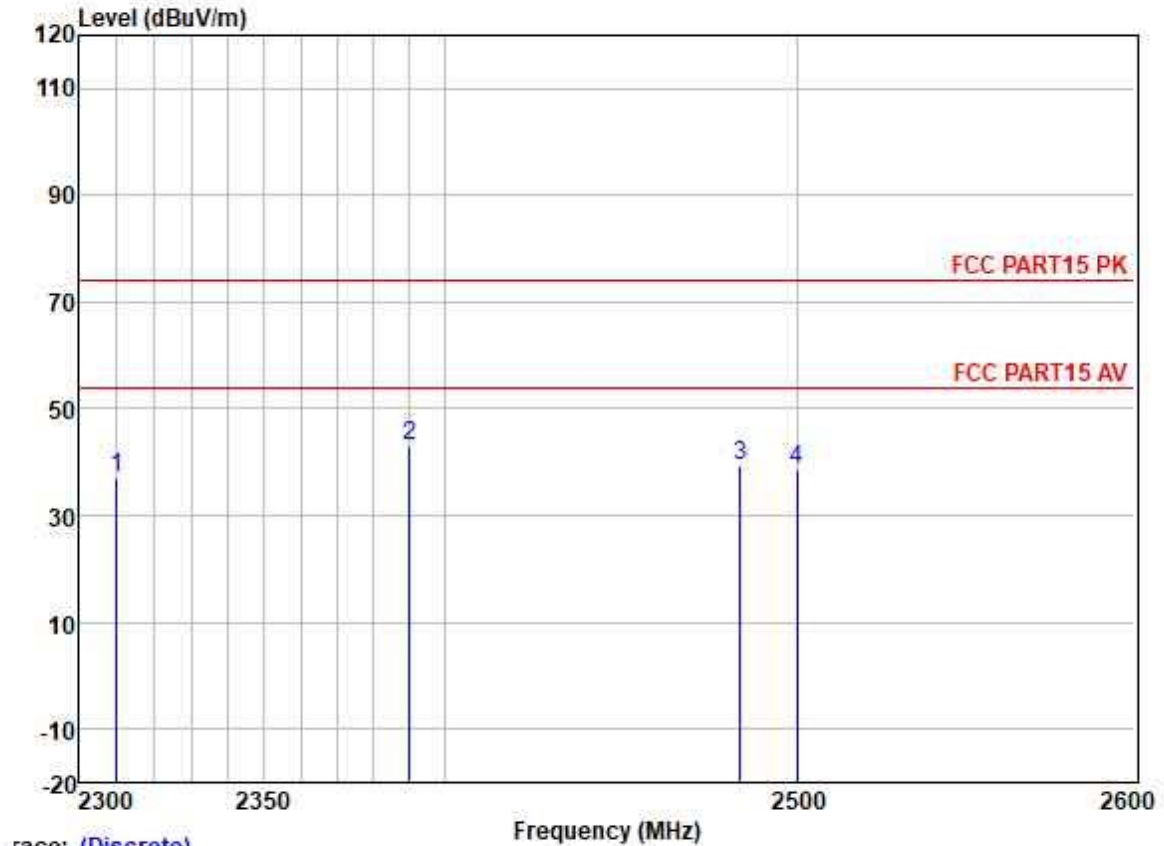

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.000	44.39	27.15	3.32	37.62	37.24	74.00	-36.76	VERTICAL	Peak
2	2390.000	49.76	27.33	3.48	37.59	42.98	74.00	-31.02	VERTICAL	Peak
3	2483.500	45.82	27.48	3.53	37.57	39.26	74.00	-34.74	VERTICAL	Peak
4	2500.000	45.33	27.50	3.40	37.56	38.67	74.00	-35.33	VERTICAL	Peak

Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High;

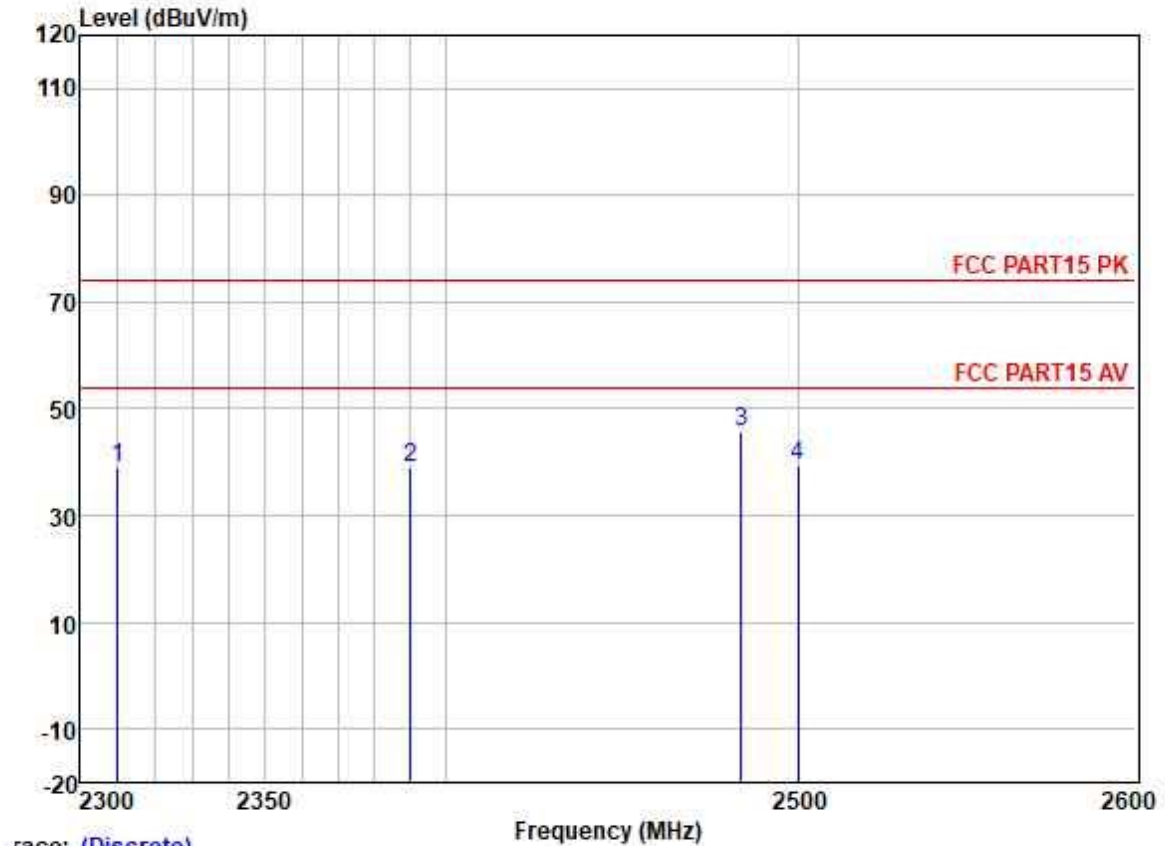

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.000	45.97	27.15	3.32	37.62	38.82	74.00	-35.18	VERTICAL	Peak
2	2390.000	45.82	27.33	3.48	37.59	39.04	74.00	-34.96	VERTICAL	Peak
3	2483.500	52.33	27.48	3.53	37.57	45.77	74.00	-28.23	VERTICAL	Peak
4	2500.000	46.16	27.50	3.40	37.56	39.50	74.00	-34.50	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low;

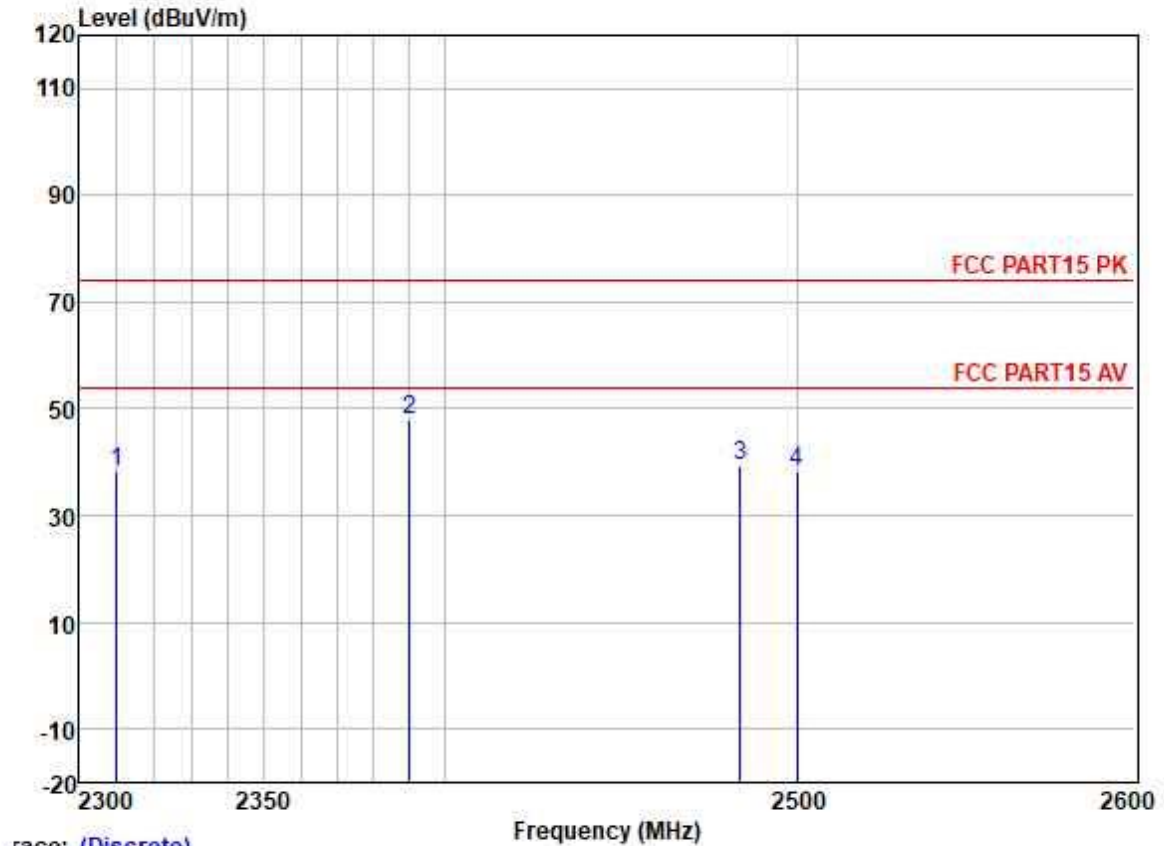

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.000	45.54	27.15	3.32	37.62	38.39	74.00	-35.61	VERTICAL	Peak
2	2390.000	54.66	27.33	3.48	37.59	47.88	74.00	-26.12	VERTICAL	Peak
3	2483.500	46.08	27.48	3.53	37.57	39.52	74.00	-34.48	VERTICAL	Peak
4	2500.000	44.90	27.50	3.40	37.56	38.24	74.00	-35.76	VERTICAL	Peak

7.8 Radiated Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.4,6.5,6.6

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 26.2 °C

Humidity: 62.5 % RH

Atmospheric Pressure: 1010 mbar


7.8.2 Test Mode Description

Pre-scan / Mode
Final test Code Description

Final test 05 TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.



7.8.3 Test Setup Diagram

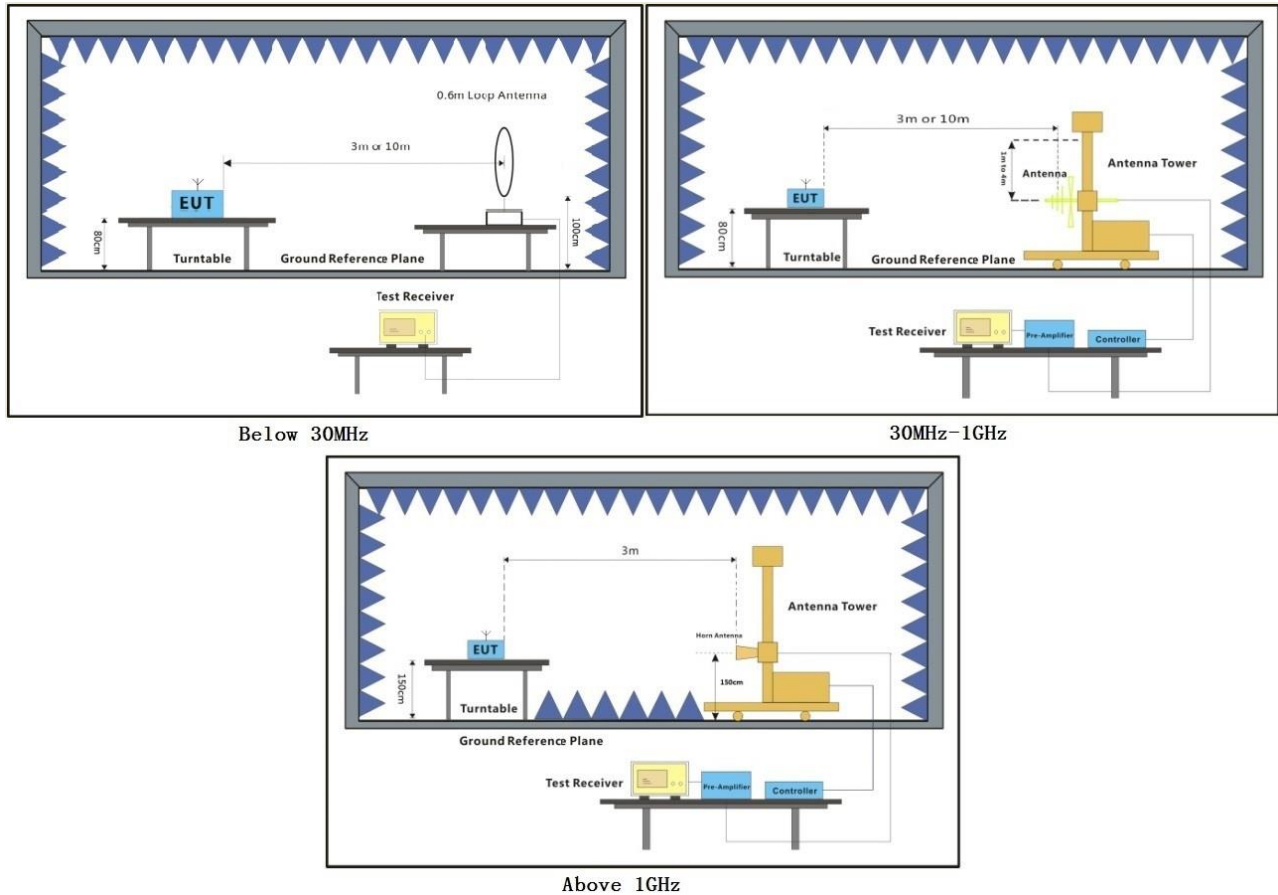

7.8.4 Measurement Procedure and Data


- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 18GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
- 5) Pretest the EUT at antenna 1 and antenna 2 and MIMO mode find antenna 1 for 802.11b/g and MIMO mode for 802.11n are the worst-case mode. only record the worst-case test data 802.11b/g/n in this report.




Test Mode: 05; Polarity: Horizontal

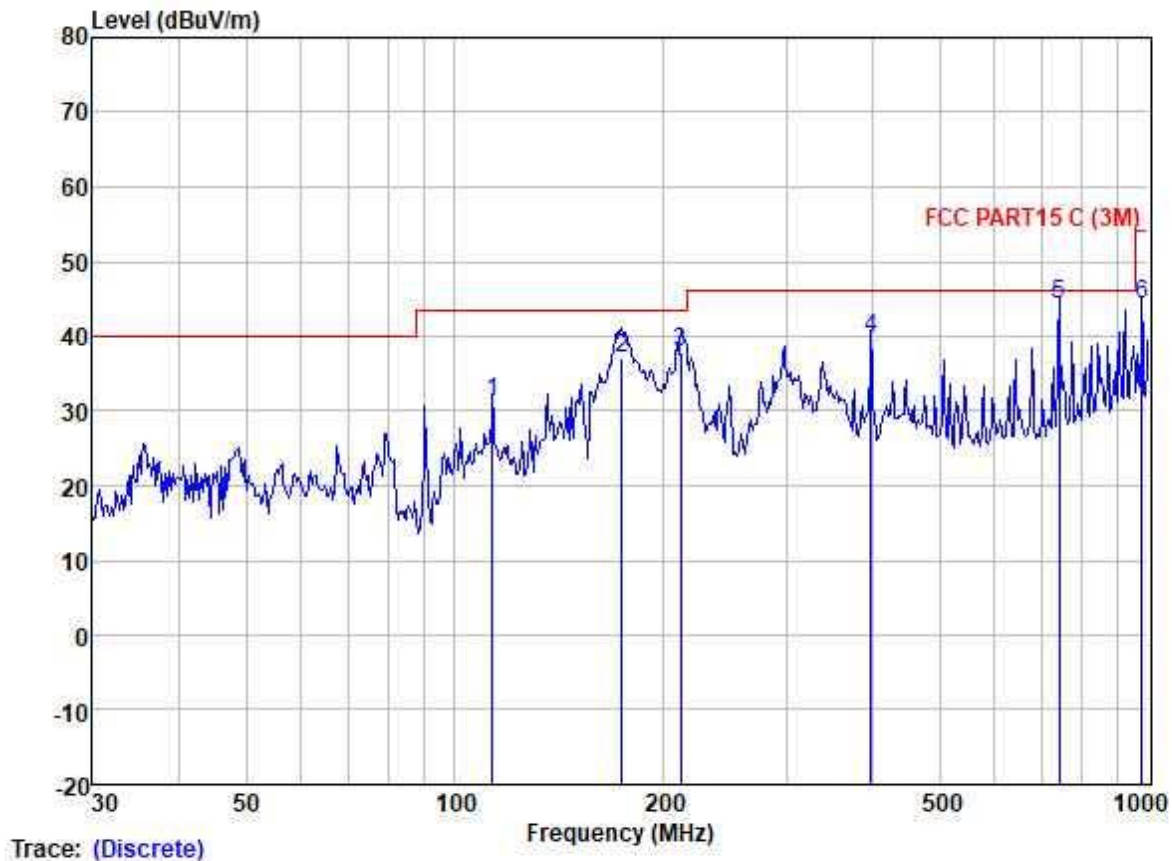

Site : SGS
Condition : FCC PART15 C (3M) HORIZONTAL
Job :
Model : 156
Power :
Test Mode :


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Measured Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dBuV		
1	113.32	45.91	10.57	1.82	27.05	31.25	43.50	-12.25	HORIZONTAL	QP
2	173.81	48.68	12.70	2.41	26.76	37.03	43.50	-6.47	HORIZONTAL	QP
3	211.53	52.13	9.80	2.59	26.72	37.80	43.50	-5.70	HORIZONTAL	QP
4	397.63	47.54	15.65	3.93	27.32	39.80	46.00	-6.20	HORIZONTAL	QP
5	744.87	44.35	22.10	5.97	28.10	44.32	46.00	-1.68	HORIZONTAL	QP
6	979.18	40.59	24.10	7.31	27.69	44.31	54.00	-9.69	HORIZONTAL	QP

Test Mode: 05; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:High;

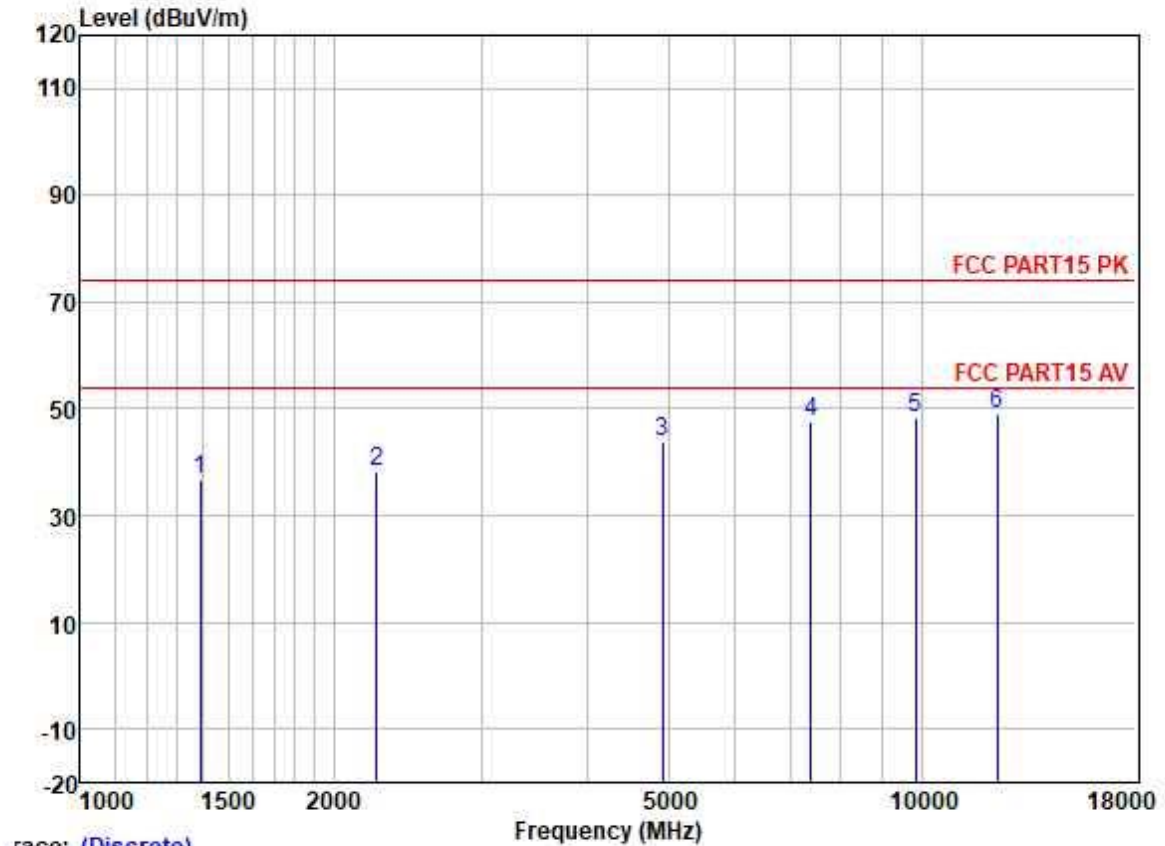


	Freq	ReadAntenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	1390.276	47.05	25.38	2.60	38.22	36.81	74.00	-37.19
2	2252.846	45.62	26.92	3.26	37.64	38.16	74.00	-35.84
3	4924.016	43.57	31.62	5.60	36.84	43.95	74.00	-30.05
4	7386.551	42.79	36.17	6.19	37.45	47.70	74.00	-26.30
5	9848.684	40.23	38.58	6.99	37.41	48.39	74.00	-25.61
6	12310.970	39.54	38.63	8.01	36.95	49.23	74.00	-24.77

Test Mode: 05; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:Low;

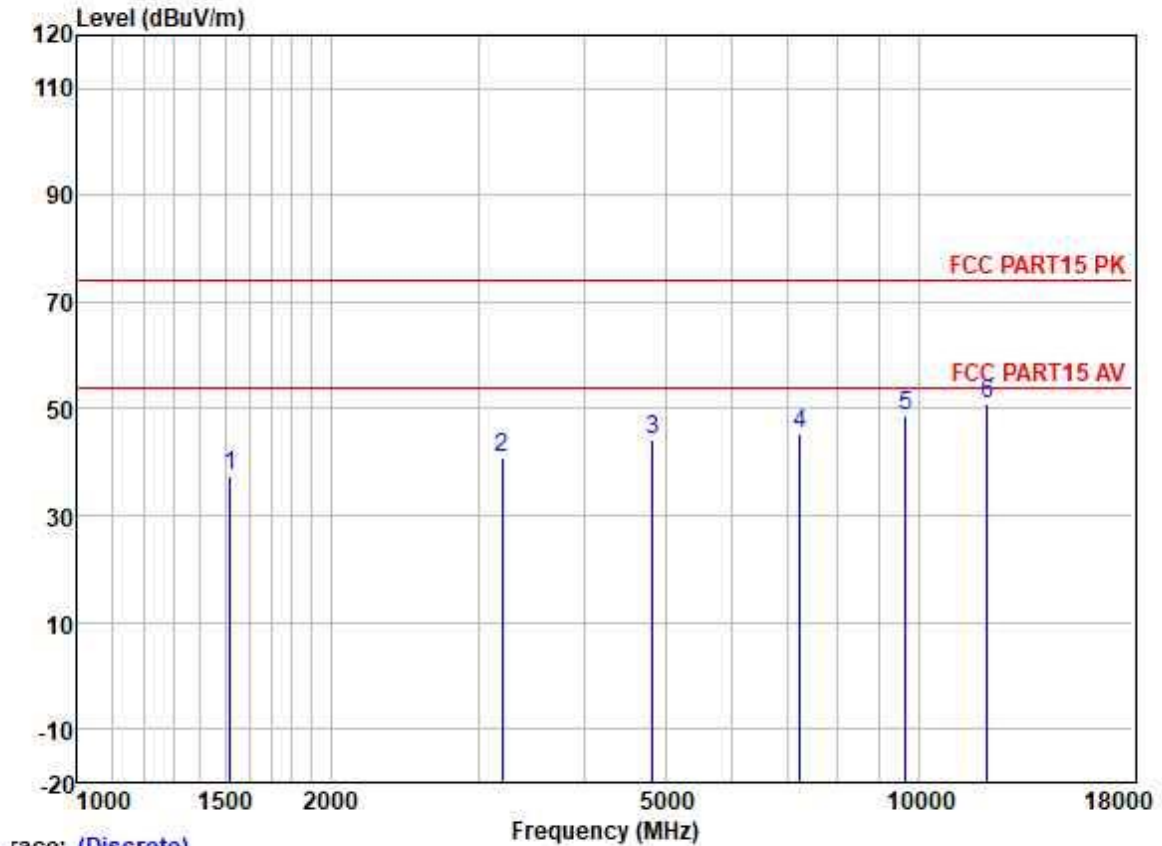


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1520.598	47.44	25.51	2.80	38.07	37.68	74.00	-36.32	HORIZONTAL	Peak
2	3196.094	45.39	28.58	4.00	37.09	40.88	74.00	-33.12	HORIZONTAL	Peak
3	4824.946	44.33	31.45	5.42	36.83	44.37	74.00	-29.63	HORIZONTAL	Peak
4	7236.517	40.88	35.70	6.03	37.39	45.22	74.00	-28.78	HORIZONTAL	Peak
5	9648.018	40.68	38.40	7.06	37.42	48.72	74.00	-25.28	HORIZONTAL	Peak
6	12060.620	40.81	38.88	8.17	37.08	50.78	74.00	-23.22	HORIZONTAL	Peak

Test Mode: 05; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:middle;

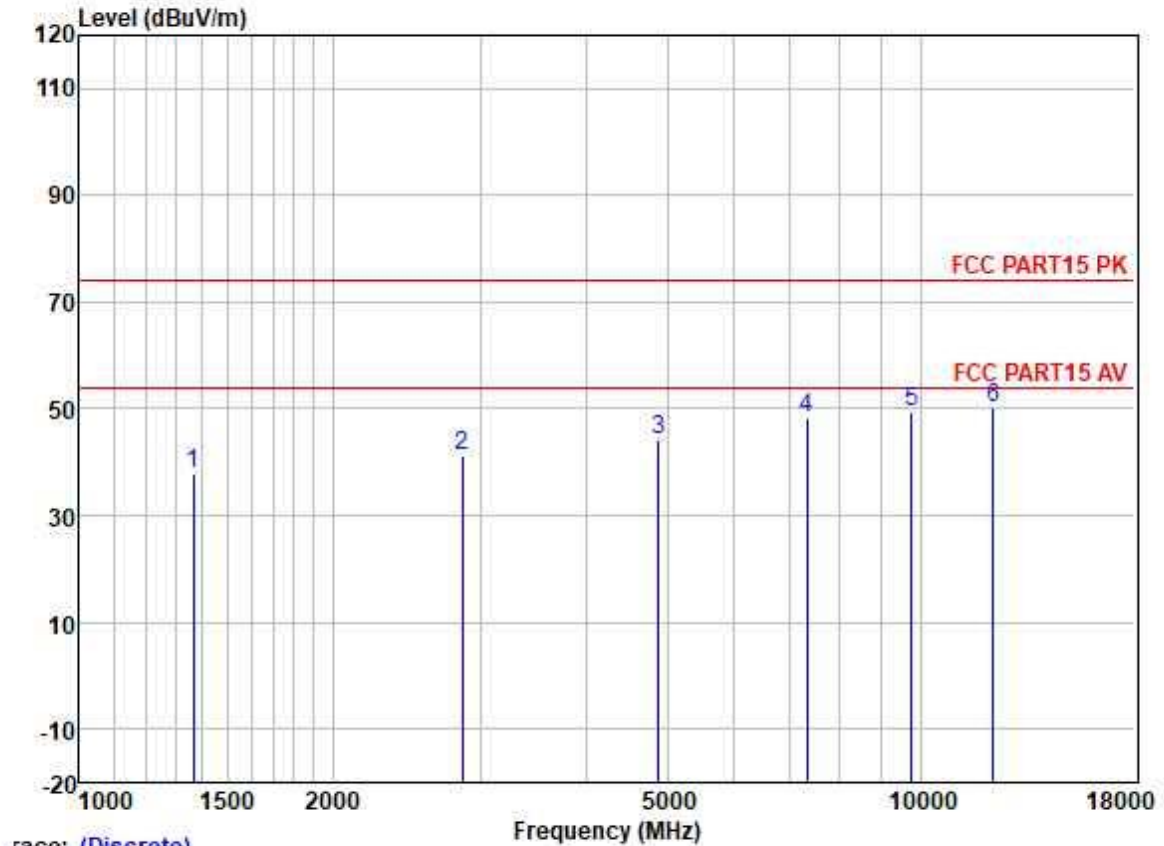

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1366.374	48.02	25.34	2.60	38.25	37.71	74.00	-36.29	HORIZONTAL Peak
2	2855.380	46.78	28.24	3.70	37.38	41.34	74.00	-32.66	HORIZONTAL Peak
3	4884.062	43.87	31.56	5.52	36.84	44.11	74.00	-29.89	HORIZONTAL Peak
4	7326.763	43.76	36.00	6.13	37.43	48.46	74.00	-25.54	HORIZONTAL Peak
5	9768.349	41.44	38.53	7.01	37.41	49.57	74.00	-24.43	HORIZONTAL Peak
6	12210.250	40.23	38.74	8.08	37.00	50.05	74.00	-23.95	HORIZONTAL Peak

Test Mode: 05; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:High;

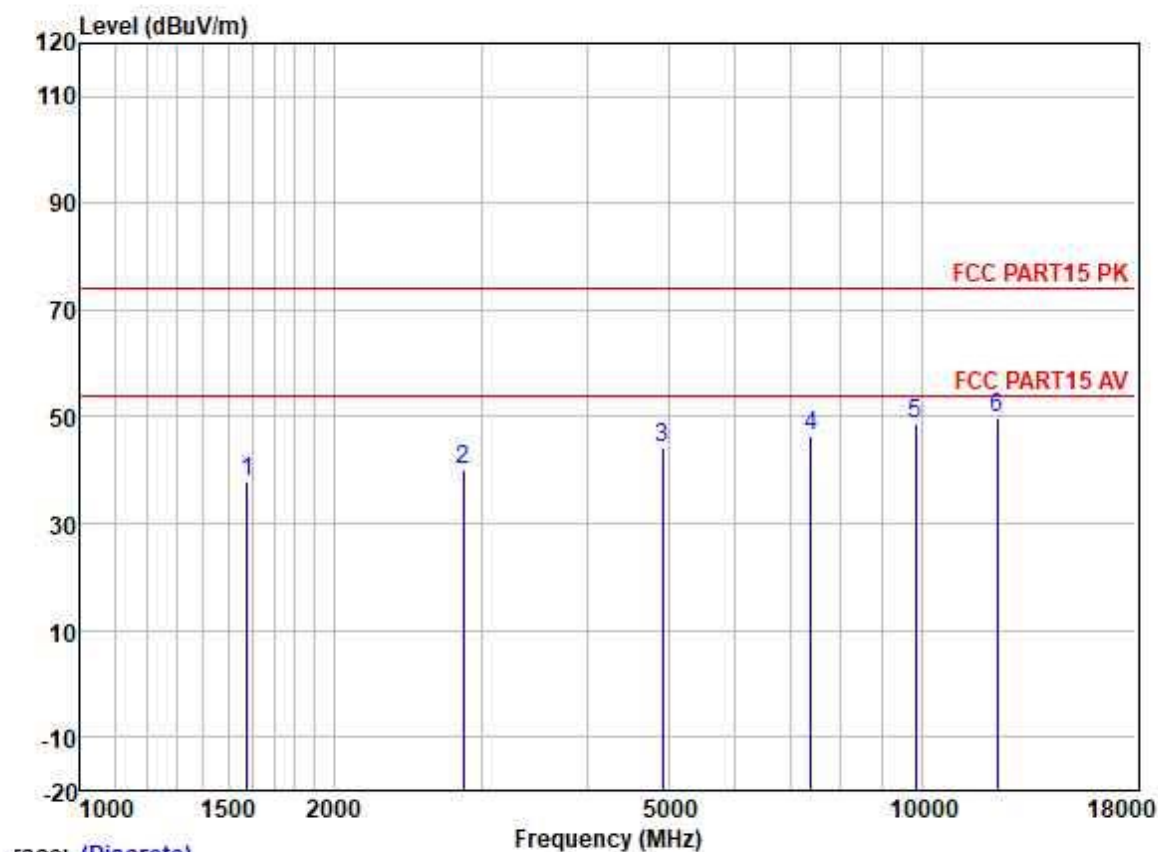

race: (Discrete)

	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1578.822	47.42	25.56	2.80	38.00	37.78	74.00	-36.22	HORIZONTAL	Peak
2	2855.380	45.54	28.24	3.70	37.38	40.10	74.00	-33.90	HORIZONTAL	Peak
3	4924.016	43.76	31.62	5.60	36.84	44.14	74.00	-29.86	HORIZONTAL	Peak
4	7386.536	41.70	36.17	6.19	37.45	46.61	74.00	-27.39	HORIZONTAL	Peak
5	9848.789	40.40	38.58	6.99	37.41	48.56	74.00	-25.44	HORIZONTAL	Peak
6	12310.560	39.95	38.63	8.01	36.95	49.64	74.00	-24.36	HORIZONTAL	Peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. (SGS 75E) 9207444

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch Testing Center EEC Laboratory.


中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 www.sqsgroup.com.cn
 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sqsg.china@sqs.com

Test Mode: 05; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:Low;

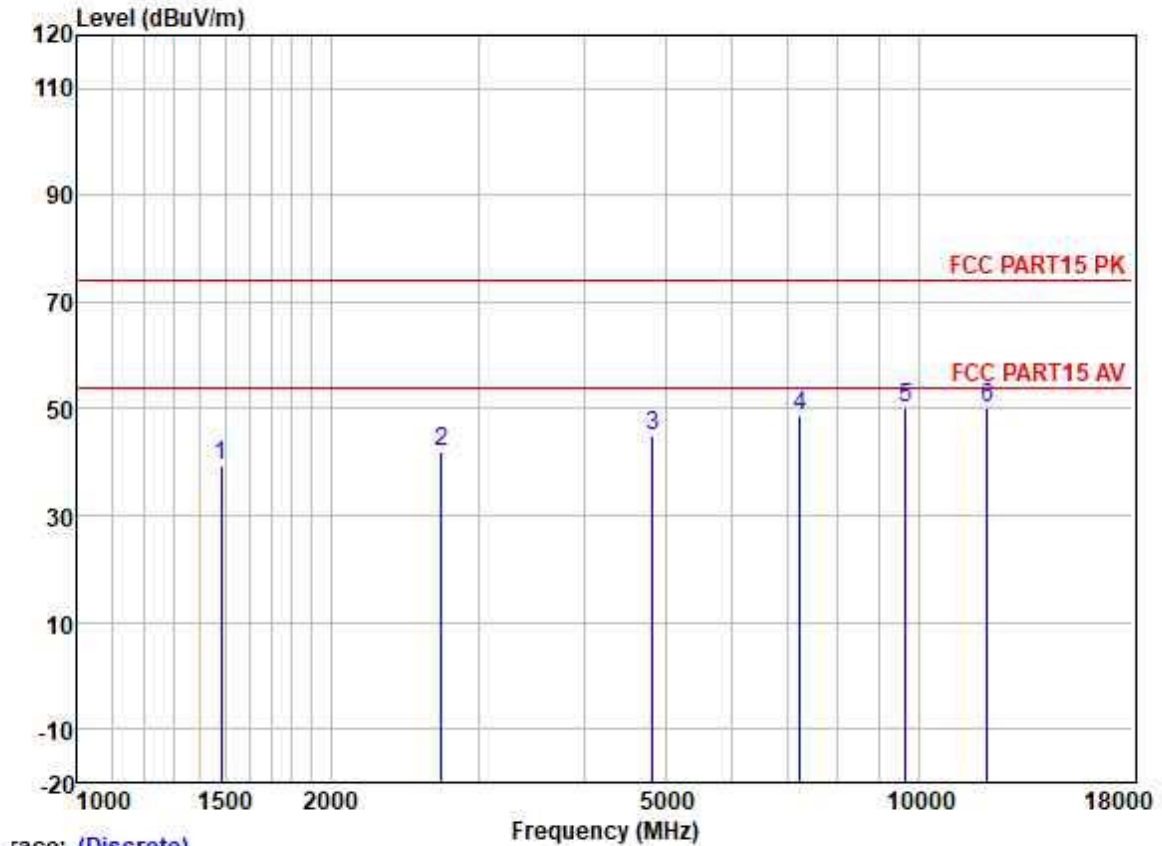


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1481.553	49.21	25.48	2.77	38.13	39.33	74.00	-34.67	HORIZONTAL	Peak
2	2710.622	47.85	27.87	3.61	37.47	41.86	74.00	-32.14	HORIZONTAL	Peak
3	4824.110	44.90	31.45	5.42	36.83	44.94	74.00	-29.06	HORIZONTAL	Peak
4	7236.762	44.43	35.70	6.03	37.39	48.77	74.00	-25.23	HORIZONTAL	Peak
5	9648.140	42.04	38.40	7.06	37.42	50.08	74.00	-23.92	HORIZONTAL	Peak
6	12060.280	40.28	38.88	8.17	37.08	50.25	74.00	-23.75	HORIZONTAL	Peak

Test Mode: 05; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:middle;

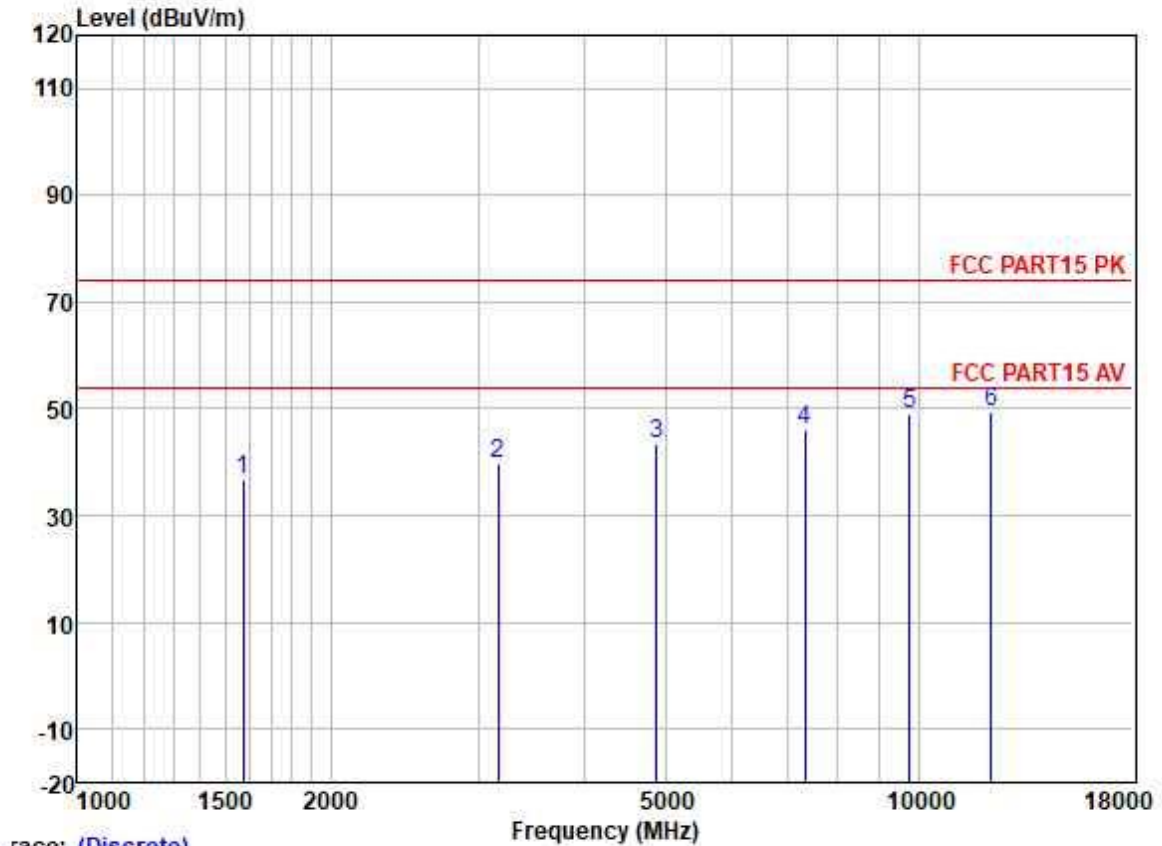

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1574.265	46.27	25.56	2.80	38.00	36.63	74.00	-37.37	HORIZONTAL	Peak
2	3168.500	44.37	28.55	3.98	37.10	39.80	74.00	-34.20	HORIZONTAL	Peak
3	4884.307	43.21	31.56	5.52	36.84	43.45	74.00	-30.55	HORIZONTAL	Peak
4	7326.263	41.51	36.00	6.13	37.43	46.21	74.00	-27.79	HORIZONTAL	Peak
5	9768.580	41.10	38.53	7.01	37.41	49.23	74.00	-24.77	HORIZONTAL	Peak
6	12210.560	39.61	38.74	8.08	37.00	49.43	74.00	-24.57	HORIZONTAL	Peak

Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High;

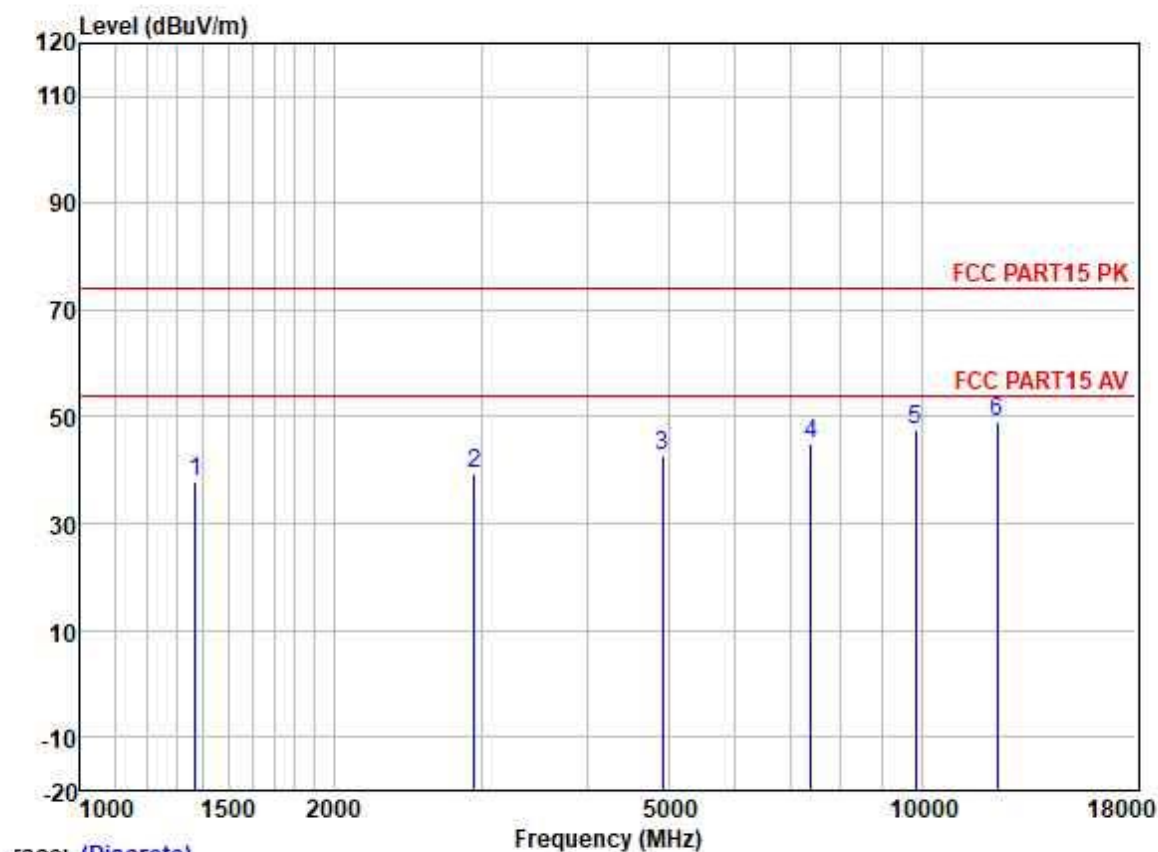

race: (Discrete)


	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1370.328	48.30	25.35	2.60	38.25	38.00	74.00	-36.00	HORIZONTAL	Peak
2	2939.115	44.49	28.34	3.74	37.30	39.27	74.00	-34.73	HORIZONTAL	Peak
3	4924.212	42.51	31.62	5.60	36.84	42.89	74.00	-31.11	HORIZONTAL	Peak
4	7386.300	40.05	36.17	6.19	37.45	44.96	74.00	-29.04	HORIZONTAL	Peak
5	9848.806	39.28	38.58	6.99	37.41	47.44	74.00	-26.56	HORIZONTAL	Peak
6	12310.580	39.34	38.63	8.01	36.95	49.03	74.00	-24.97	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or available at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>, for electronic form documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Dcccheck@sgs.com.
 [No. 198 Kezhi Road, Sientech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgs.com.]
 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low;

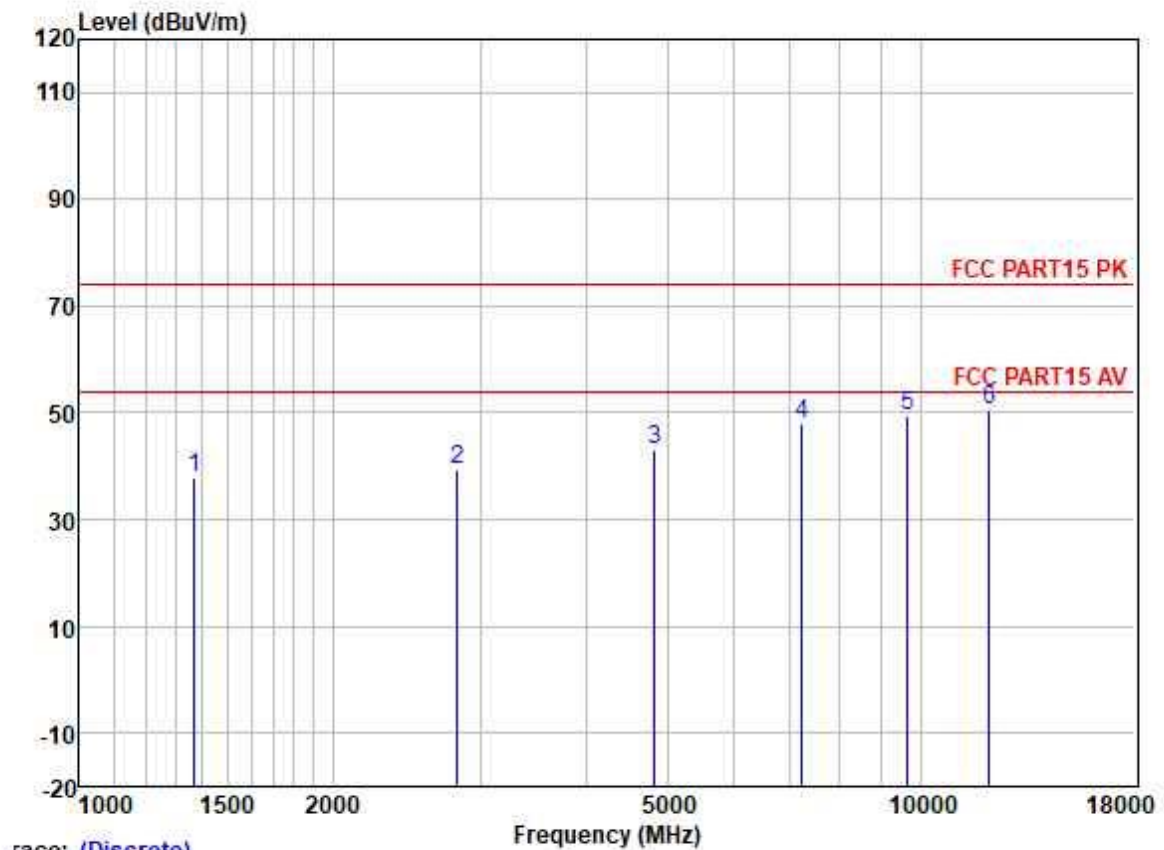

race: (Discrete)

	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1370.328	48.23	25.35	2.60	38.25	37.93	74.00	-36.07	HORIZONTAL	Peak
2	2814.411	44.82	28.17	3.70	37.40	39.29	74.00	-34.71	HORIZONTAL	Peak
3	4824.125	43.12	31.45	5.42	36.83	43.16	74.00	-30.84	HORIZONTAL	Peak
4	7236.040	43.77	35.70	6.03	37.39	48.11	74.00	-25.89	HORIZONTAL	Peak
5	9648.140	41.50	38.40	7.06	37.42	49.54	74.00	-24.46	HORIZONTAL	Peak
6	12060.600	40.51	38.88	8.17	37.08	50.48	74.00	-23.52	HORIZONTAL	Peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch Testing Center EEC Laboratory.


Or email: CN.Doccheck@sgs.com
No.198 Kezhu Road, Science Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.ssgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 [sgs.china@sgs.com](mailto:ssg.china@sgs.com)

Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle;

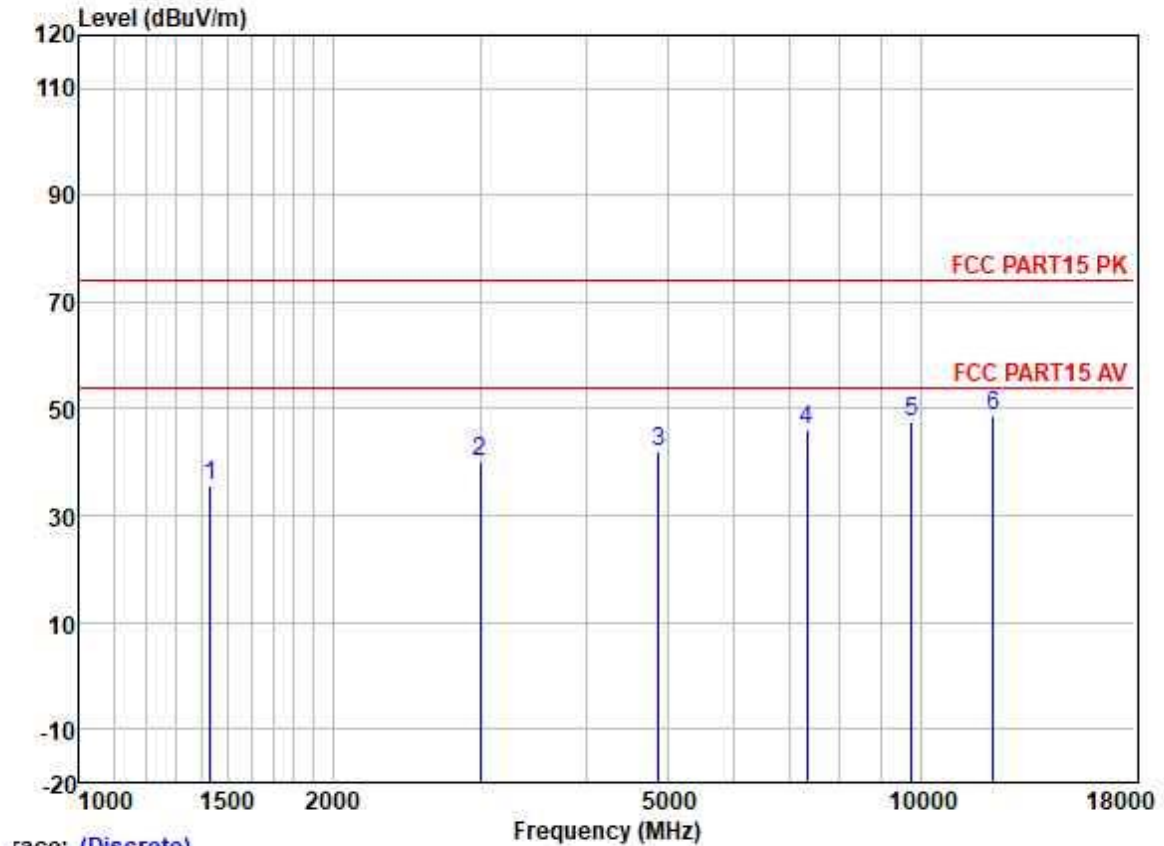

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1431.047	45.81	25.43	2.66	38.20	35.70	74.00	-38.30	HORIZONTAL	Peak
2	2999.187	45.16	28.40	3.80	37.25	40.11	74.00	-33.89	HORIZONTAL	Peak
3	4884.400	41.86	31.56	5.52	36.84	42.10	74.00	-31.90	HORIZONTAL	Peak
4	7326.421	41.24	36.00	6.13	37.43	45.94	74.00	-28.06	HORIZONTAL	Peak
5	9768.852	39.53	38.53	7.01	37.41	47.66	74.00	-26.34	HORIZONTAL	Peak
6	12210.800	38.94	38.74	8.08	37.00	48.76	74.00	-25.24	HORIZONTAL	Peak

Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High;

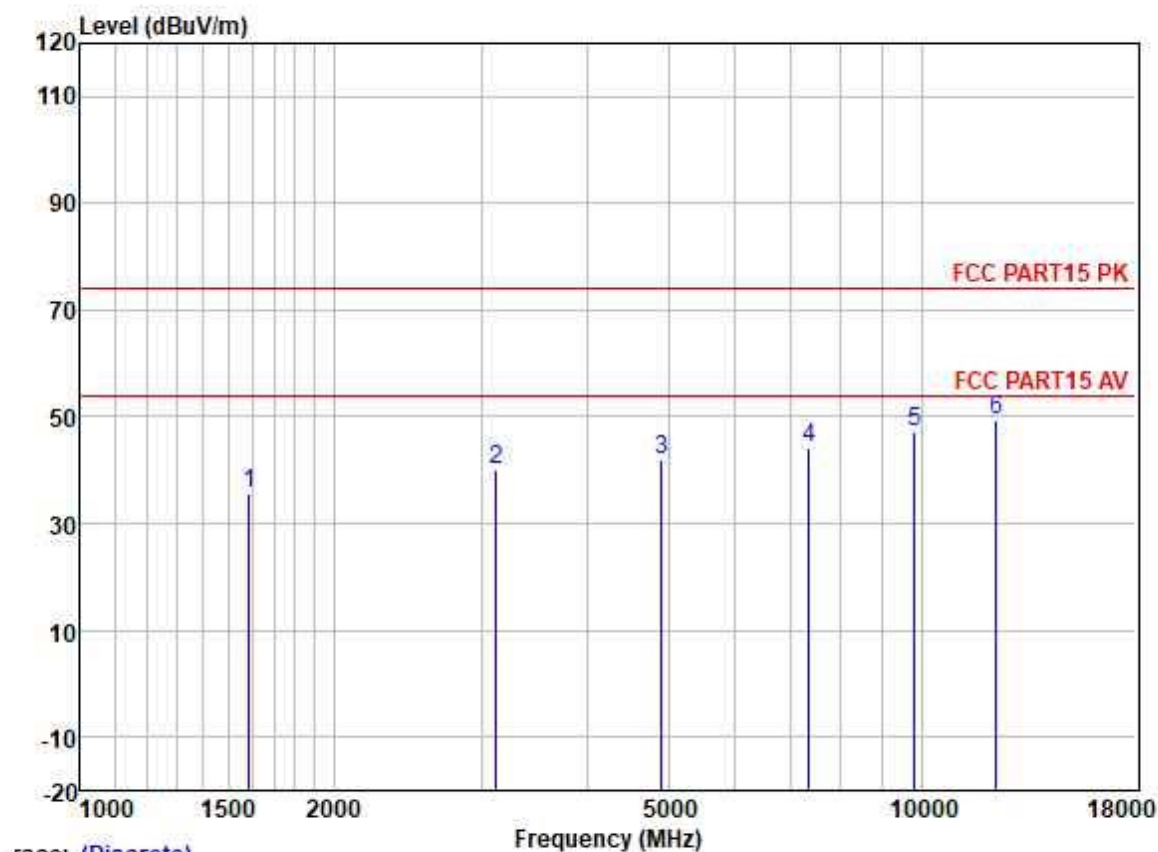

race: (Discrete)


	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1587.975	45.06	25.57	2.80	37.98	35.45	74.00	-38.55	HORIZONTAL	Peak
2	3123.039	44.83	28.50	3.94	37.14	40.13	74.00	-33.87	HORIZONTAL	Peak
3	4904.872	41.76	31.58	5.55	36.84	42.05	74.00	-31.95	HORIZONTAL	Peak
4	7356.885	39.40	36.06	6.15	37.44	44.17	74.00	-29.83	HORIZONTAL	Peak
5	9808.278	39.12	38.56	7.00	37.41	47.27	74.00	-26.73	HORIZONTAL	Peak
6	12260.580	39.53	38.70	8.06	36.98	49.31	74.00	-24.69	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. (SGS 75E) 9207444

Results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com.
 No.198 Kezhu Road, Sientech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com


Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low;

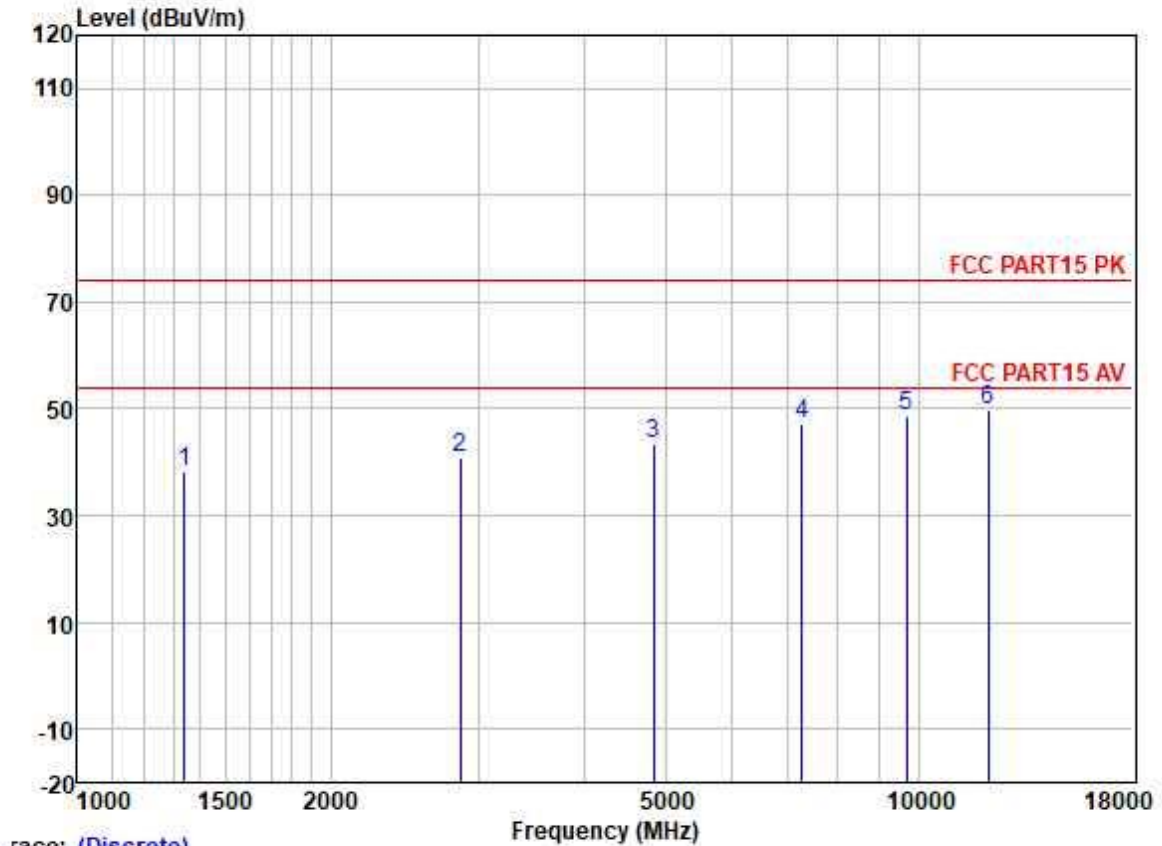

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1339.006	48.46	25.29	2.60	38.27	38.08	74.00	-35.92	HORIZONTAL Peak
2	2855.380	46.12	28.24	3.70	37.38	40.68	74.00	-33.32	HORIZONTAL Peak
3	4844.760	43.39	31.50	5.45	36.84	43.50	74.00	-30.50	HORIZONTAL Peak
4	7266.278	42.78	35.78	6.06	37.41	47.21	74.00	-26.79	HORIZONTAL Peak
5	9688.717	40.78	38.44	7.04	37.42	48.84	74.00	-25.16	HORIZONTAL Peak
6	12110.910	39.80	38.83	8.14	37.05	49.72	74.00	-24.28	HORIZONTAL Peak

Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:middle;

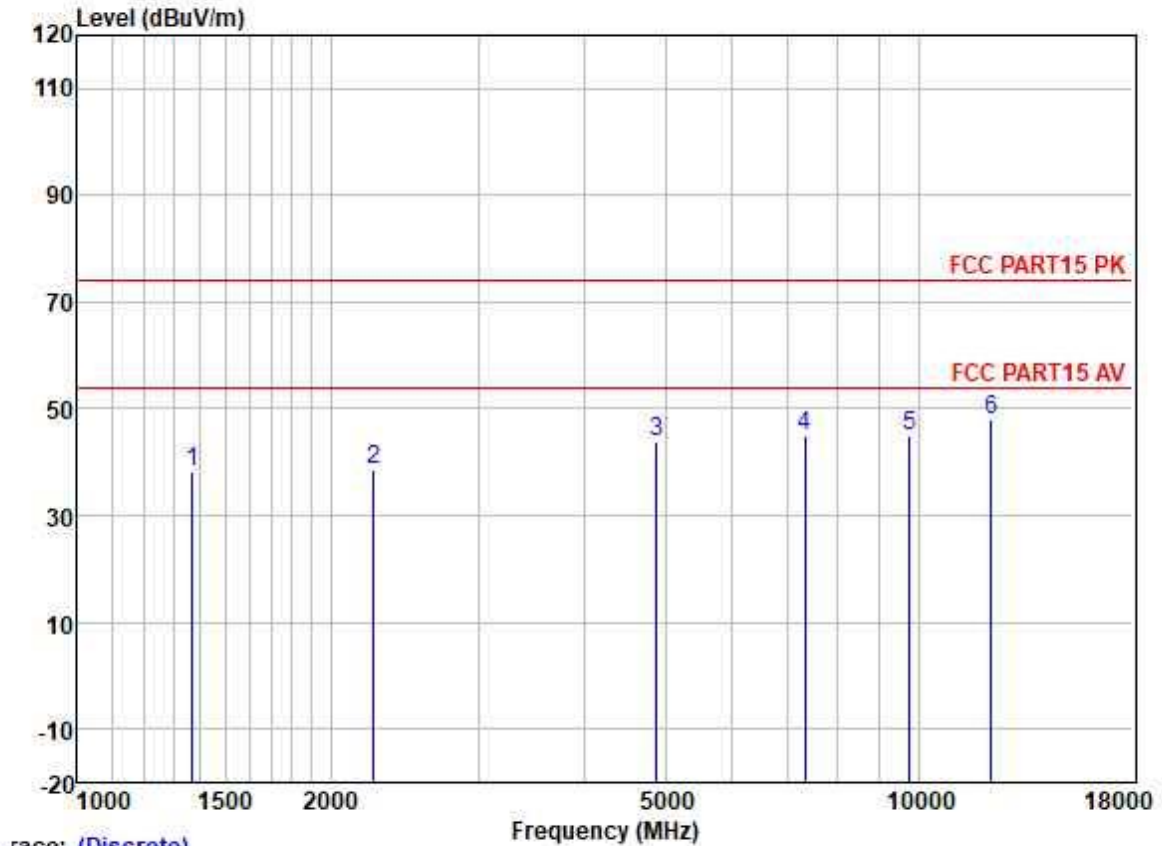


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1370.328	48.63	25.35	2.60	38.25	38.33	74.00	-35.67	HORIZONTAL Peak
2	2252.846	46.06	26.92	3.26	37.64	38.60	74.00	-35.40	HORIZONTAL Peak
3	4884.540	43.78	31.56	5.52	36.84	44.02	74.00	-29.98	HORIZONTAL Peak
4	7326.412	40.18	36.00	6.13	37.43	44.88	74.00	-29.12	HORIZONTAL Peak
5	9768.540	36.95	38.53	7.01	37.41	45.08	74.00	-28.92	HORIZONTAL Peak
6	12210.850	38.29	38.74	8.08	37.00	48.11	74.00	-25.89	HORIZONTAL Peak

Test Mode: 05; Polarity: Vertical

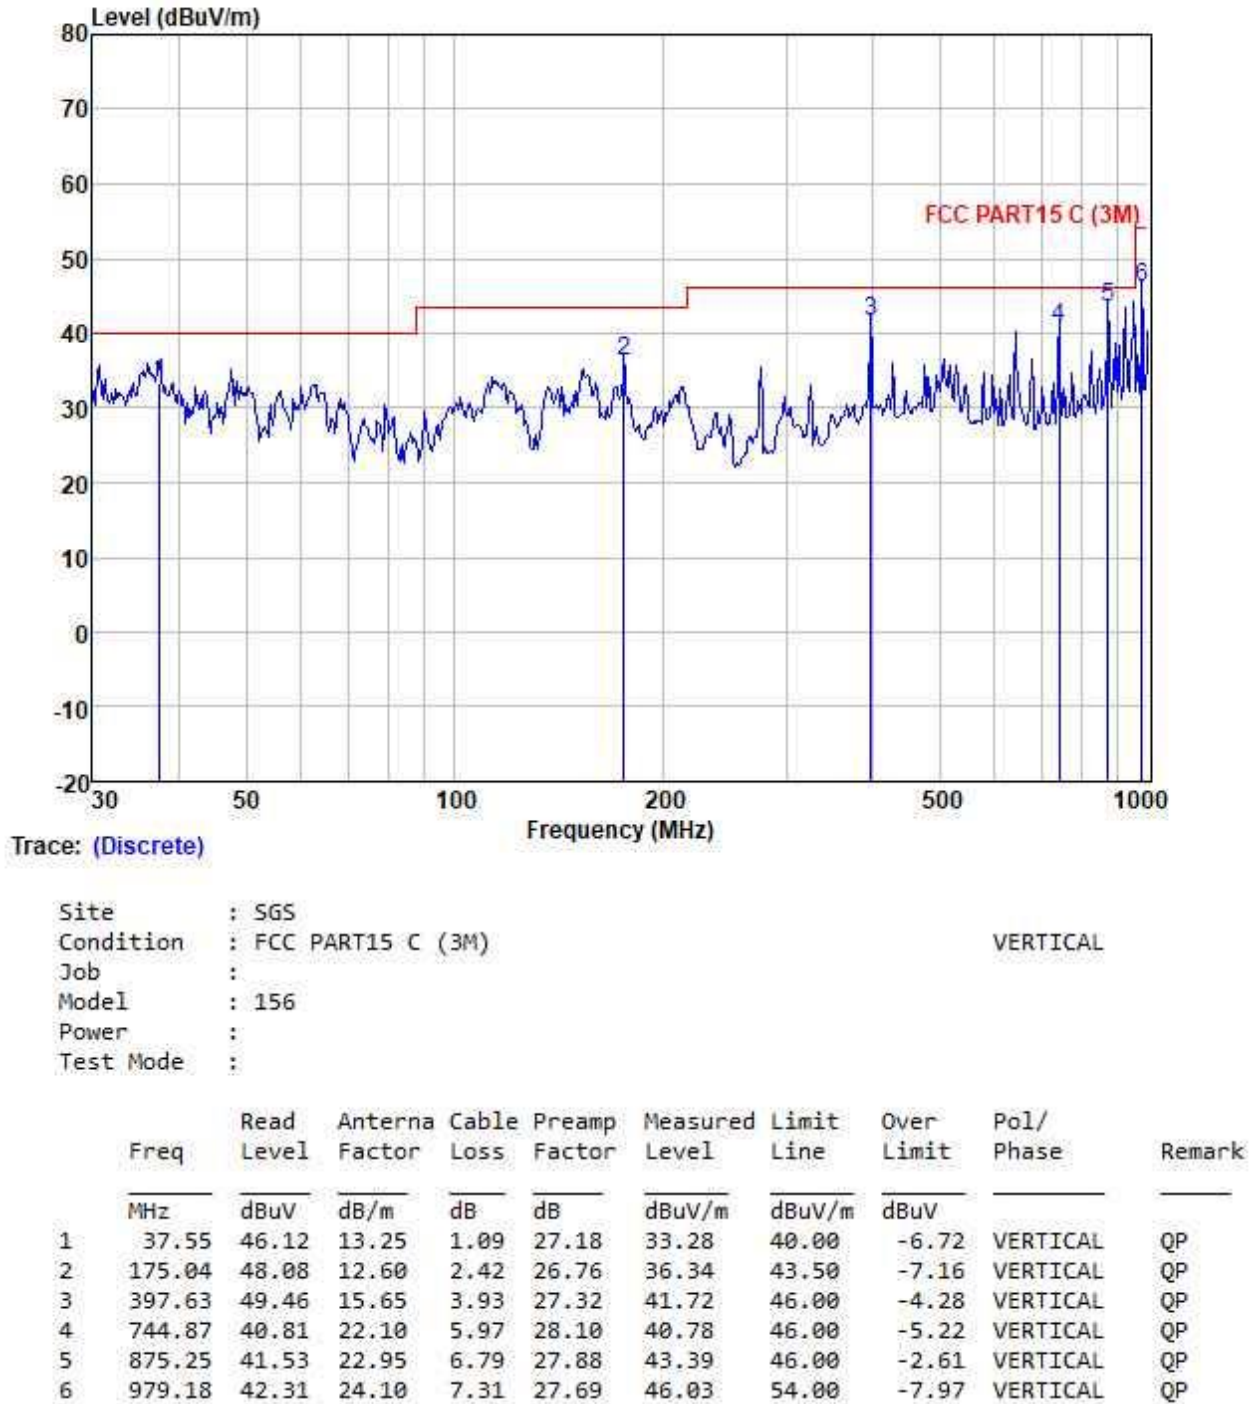


Test Mode: 05; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:High;

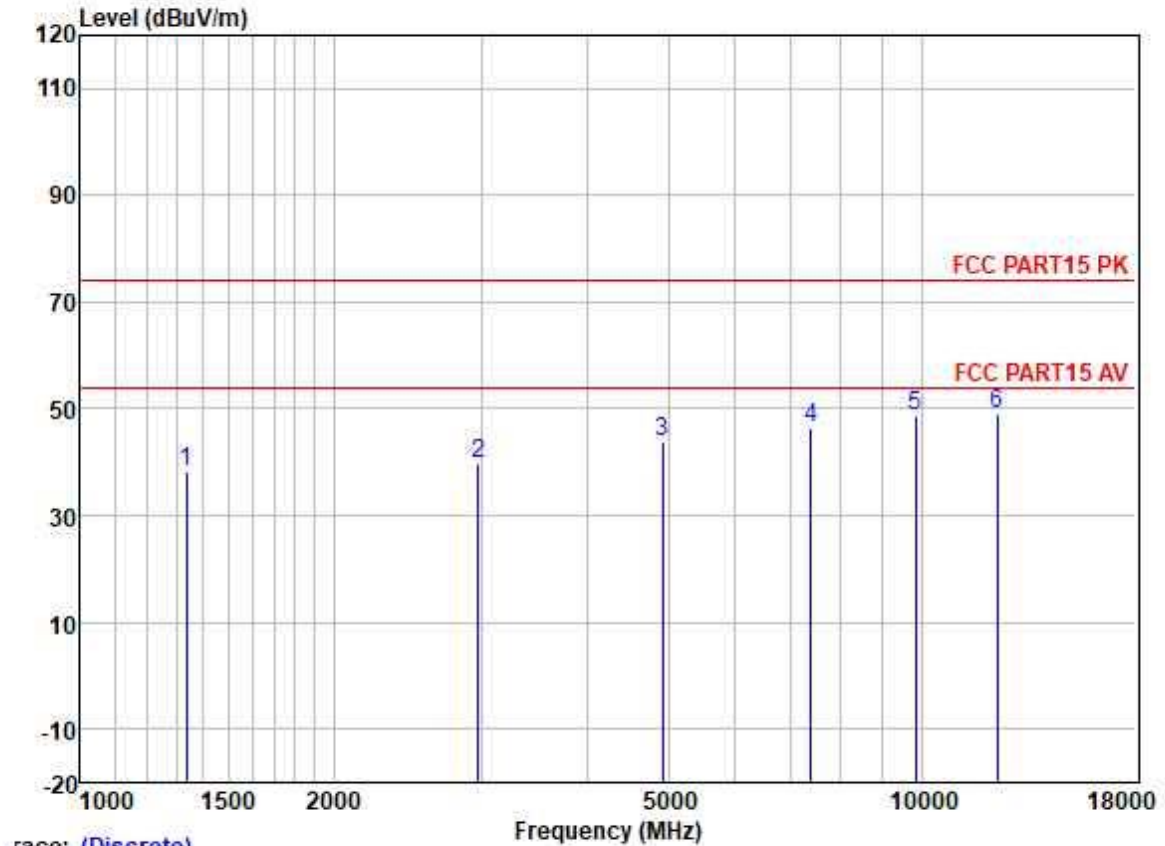


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1335.141	48.56	25.28	2.60	38.29	38.15	74.00	-35.85	VERTICAL	Peak
2	2973.293	44.91	28.38	3.78	37.28	39.79	74.00	-34.21	VERTICAL	Peak
3	4924.887	43.48	31.62	5.60	36.84	43.86	74.00	-30.14	VERTICAL	Peak
4	7386.654	41.69	36.17	6.19	37.45	46.60	74.00	-27.40	VERTICAL	Peak
5	9848.420	40.43	38.58	6.99	37.41	48.59	74.00	-25.41	VERTICAL	Peak
6	12310.900	39.51	38.63	8.01	36.95	49.20	74.00	-24.80	VERTICAL	Peak

Test Mode: 05; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:Low;

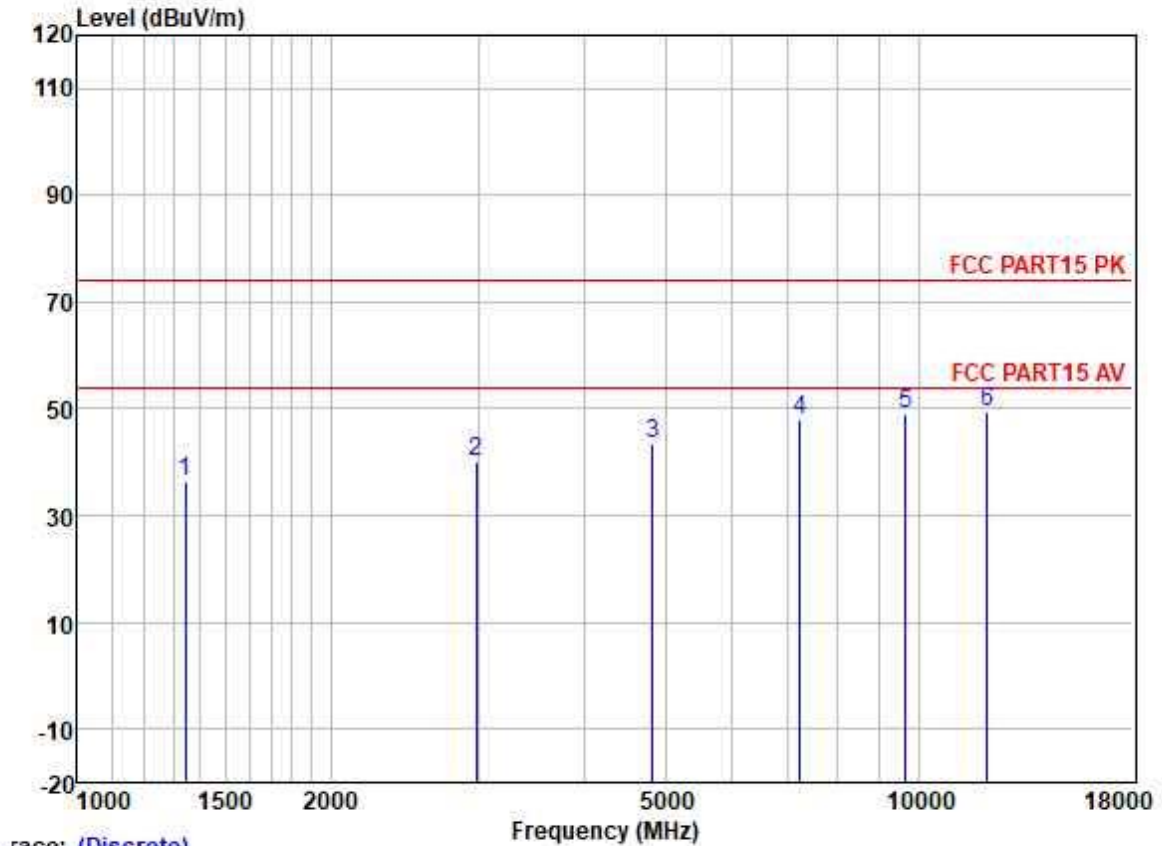


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1342.882	46.83	25.30	2.60	38.27	36.46	74.00	-37.54	VERTICAL	Peak
2	2981.899	45.04	28.38	3.79	37.28	39.93	74.00	-34.07	VERTICAL	Peak
3	4824.948	43.53	31.45	5.42	36.83	43.57	74.00	-30.43	VERTICAL	Peak
4	7236.040	43.74	35.70	6.03	37.39	48.08	74.00	-25.92	VERTICAL	Peak
5	9648.717	41.03	38.40	7.06	37.42	49.07	74.00	-24.93	VERTICAL	Peak
6	12060.250	39.38	38.88	8.17	37.08	49.35	74.00	-24.65	VERTICAL	Peak

Test Mode: 05; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:middle;

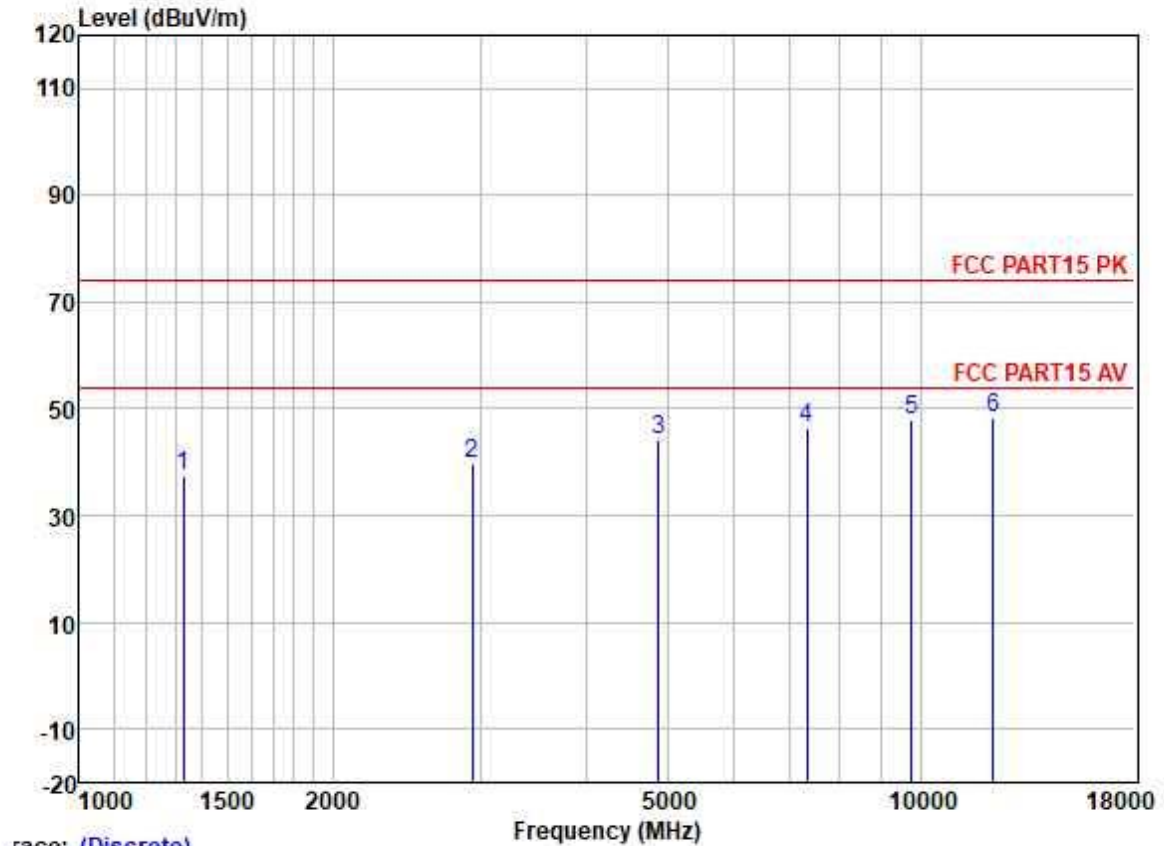


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1331.288	48.04	25.28	2.60	38.29	37.63	74.00	-36.37	VERTICAL	Peak
2	2930.633	44.88	28.33	3.73	37.32	39.62	74.00	-34.38	VERTICAL	Peak
3	4884.400	43.97	31.56	5.52	36.84	44.21	74.00	-29.79	VERTICAL	Peak
4	7326.695	41.74	36.00	6.13	37.43	46.44	74.00	-27.56	VERTICAL	Peak
5	9768.018	39.85	38.53	7.01	37.41	47.98	74.00	-26.02	VERTICAL	Peak
6	12210.250	38.49	38.74	8.08	37.00	48.31	74.00	-25.69	VERTICAL	Peak

Test Mode: 05; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:High;

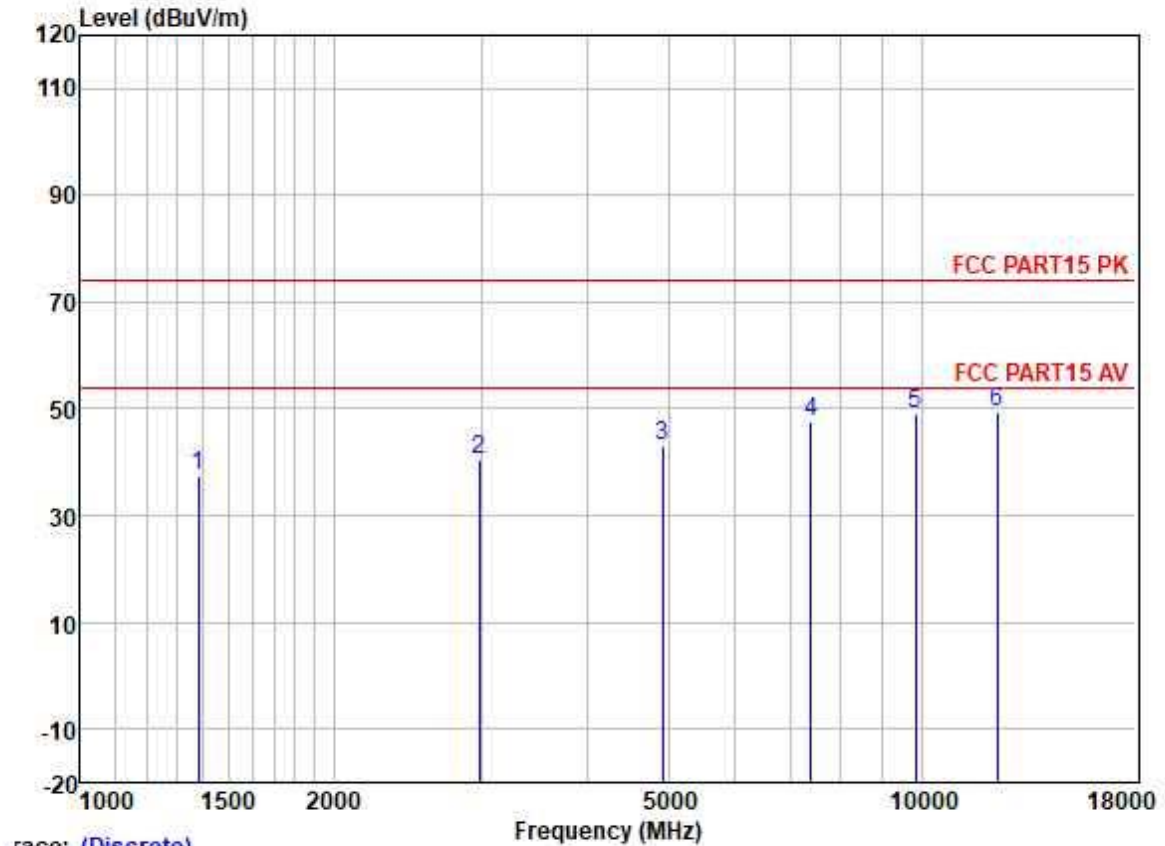


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1382.262	47.81	25.37	2.60	38.25	37.53	74.00	-36.47	VERTICAL	Peak
2	2981.899	45.42	28.38	3.79	37.28	40.31	74.00	-33.69	VERTICAL	Peak
3	4924.110	42.70	31.62	5.60	36.84	43.08	74.00	-30.92	VERTICAL	Peak
4	7386.762	42.68	36.17	6.19	37.45	47.59	74.00	-26.41	VERTICAL	Peak
5	9848.820	40.88	38.58	6.99	37.41	49.04	74.00	-24.96	VERTICAL	Peak
6	12310.280	39.59	38.63	8.01	36.95	49.28	74.00	-24.72	VERTICAL	Peak

Test Mode: 05; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:Low;

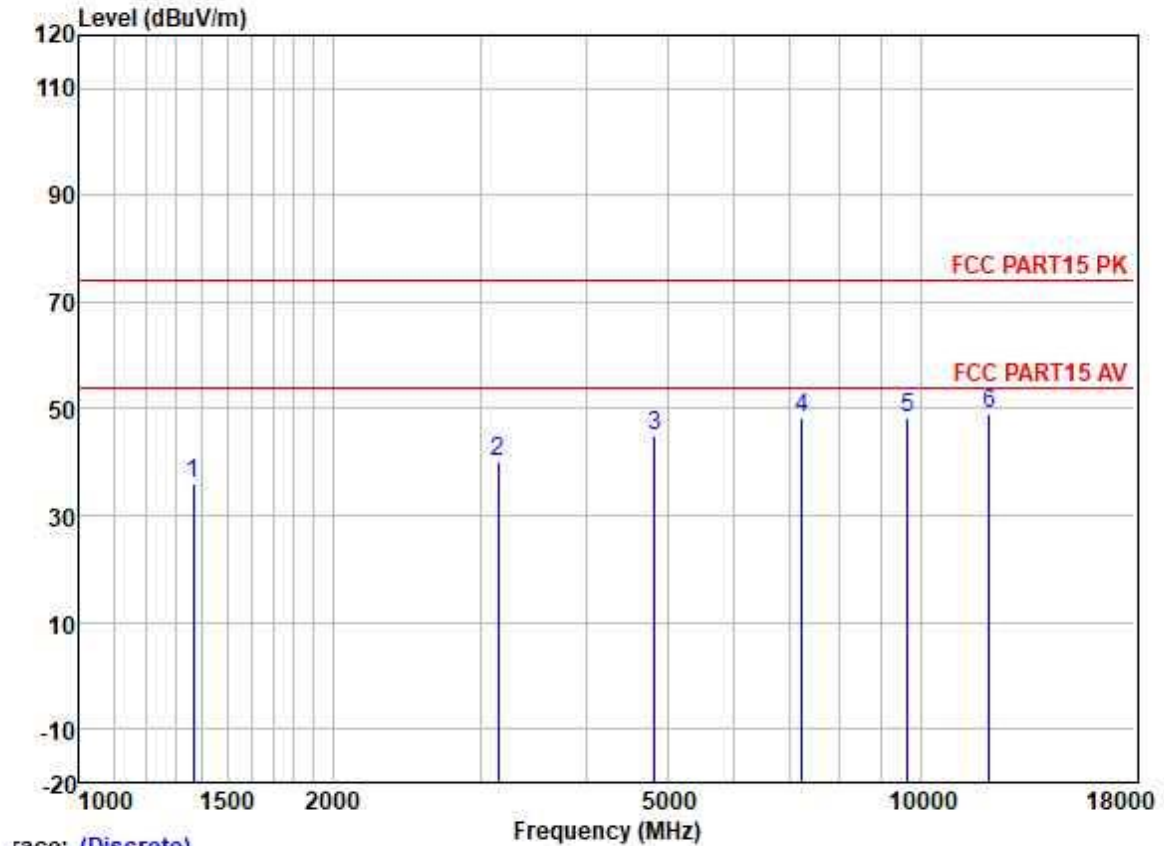

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1366.374	46.22	25.34	2.60	38.25	35.91	74.00	-38.09	VERTICAL Peak
2	3150.237	44.87	28.52	3.96	37.12	40.23	74.00	-33.77	VERTICAL Peak
3	4824.833	44.76	31.45	5.42	36.83	44.80	74.00	-29.20	VERTICAL Peak
4	7236.040	43.83	35.70	6.03	37.39	48.17	74.00	-25.83	VERTICAL Peak
5	9648.257	40.22	38.40	7.06	37.42	48.26	74.00	-25.74	VERTICAL Peak
6	12060.010	39.02	38.88	8.17	37.08	48.99	74.00	-25.01	VERTICAL Peak


Test Mode: 05; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:middle;

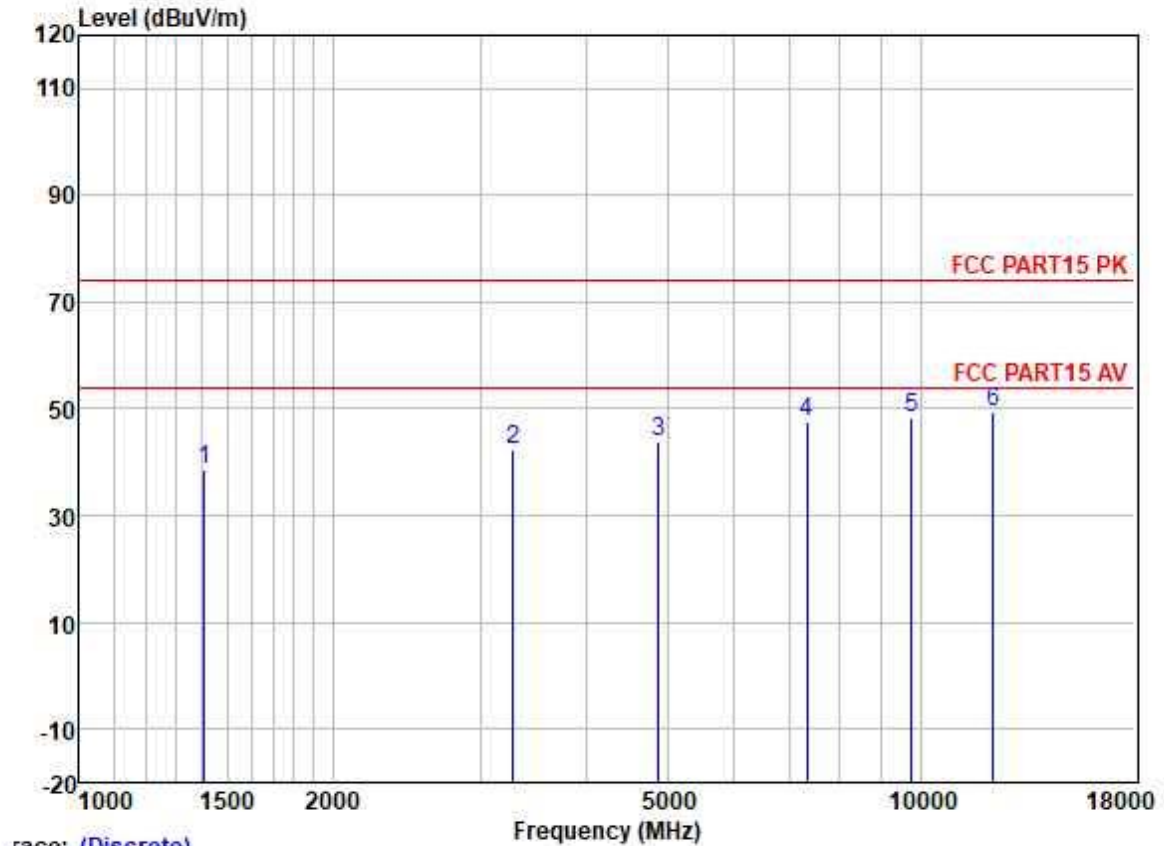

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1406.443	48.87	25.40	2.61	38.22	38.66	74.00	-35.34	VERTICAL	Peak
2	3280.326	46.48	28.73	4.04	37.04	42.21	74.00	-31.79	VERTICAL	Peak
3	4884.497	43.63	31.56	5.52	36.84	43.87	74.00	-30.13	VERTICAL	Peak
4	7326.040	42.82	36.00	6.13	37.43	47.52	74.00	-26.48	VERTICAL	Peak
5	9768.257	40.01	38.53	7.01	37.41	48.14	74.00	-25.86	VERTICAL	Peak
6	12210.570	39.69	38.74	8.08	37.00	49.51	74.00	-24.49	VERTICAL	Peak

Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High;

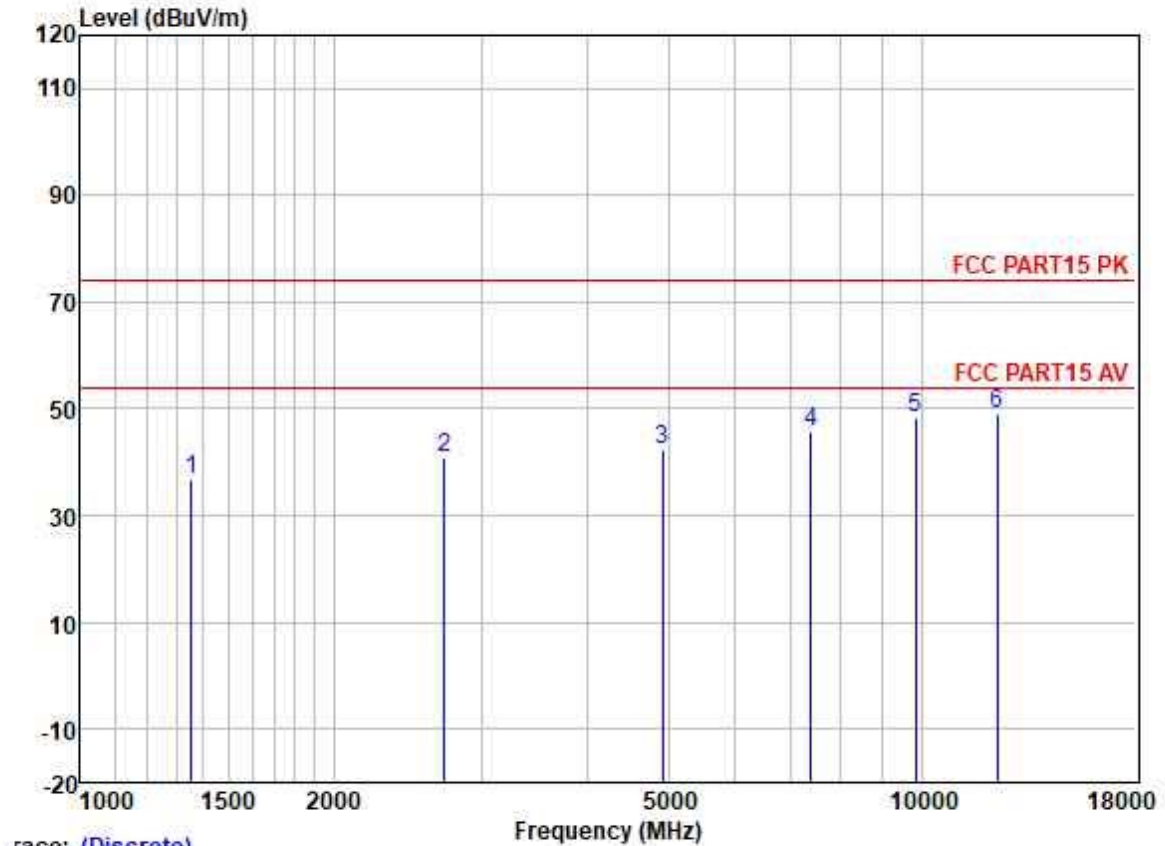


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1354.577	47.19	25.32	2.60	38.27	36.84	74.00	-37.16	VERTICAL	Peak
2	2710.622	46.96	27.87	3.61	37.47	40.97	74.00	-33.03	VERTICAL	Peak
3	4924.977	41.90	31.62	5.60	36.84	42.28	74.00	-31.72	VERTICAL	Peak
4	7386.797	40.71	36.17	6.19	37.45	45.62	74.00	-28.38	VERTICAL	Peak
5	9848.390	40.03	38.58	6.99	37.41	48.19	74.00	-25.81	VERTICAL	Peak
6	12310.250	39.52	38.63	8.01	36.95	49.21	74.00	-24.79	VERTICAL	Peak

Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low;

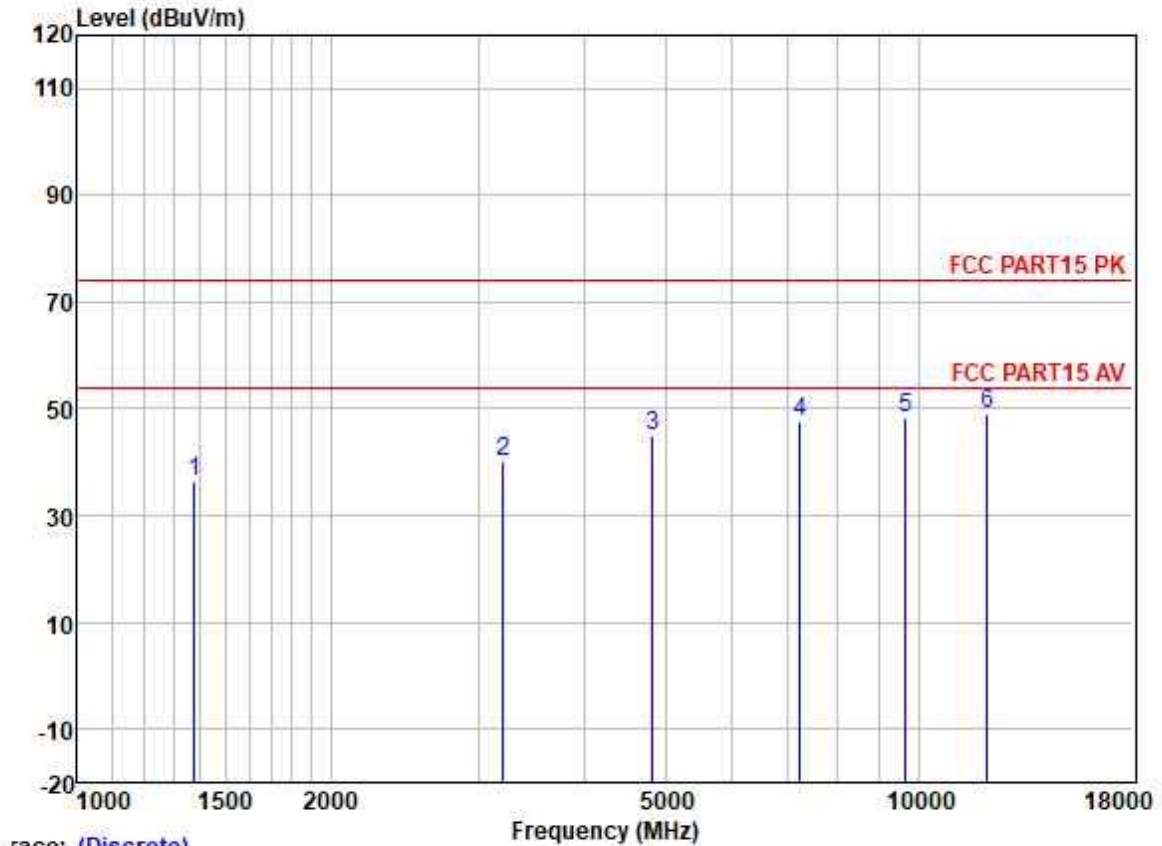


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1378.273	46.77	25.36	2.60	38.25	36.48	74.00	-37.52	VERTICAL	Peak
2	3205.345	44.48	28.60	4.00	37.09	39.99	74.00	-34.01	VERTICAL	Peak
3	4824.662	44.79	31.45	5.42	36.83	44.83	74.00	-29.17	VERTICAL	Peak
4	7236.763	43.30	35.70	6.03	37.39	47.64	74.00	-26.36	VERTICAL	Peak
5	9648.257	40.20	38.40	7.06	37.42	48.24	74.00	-25.76	VERTICAL	Peak
6	12060.250	39.17	38.88	8.17	37.08	49.14	74.00	-24.86	VERTICAL	Peak

Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle;

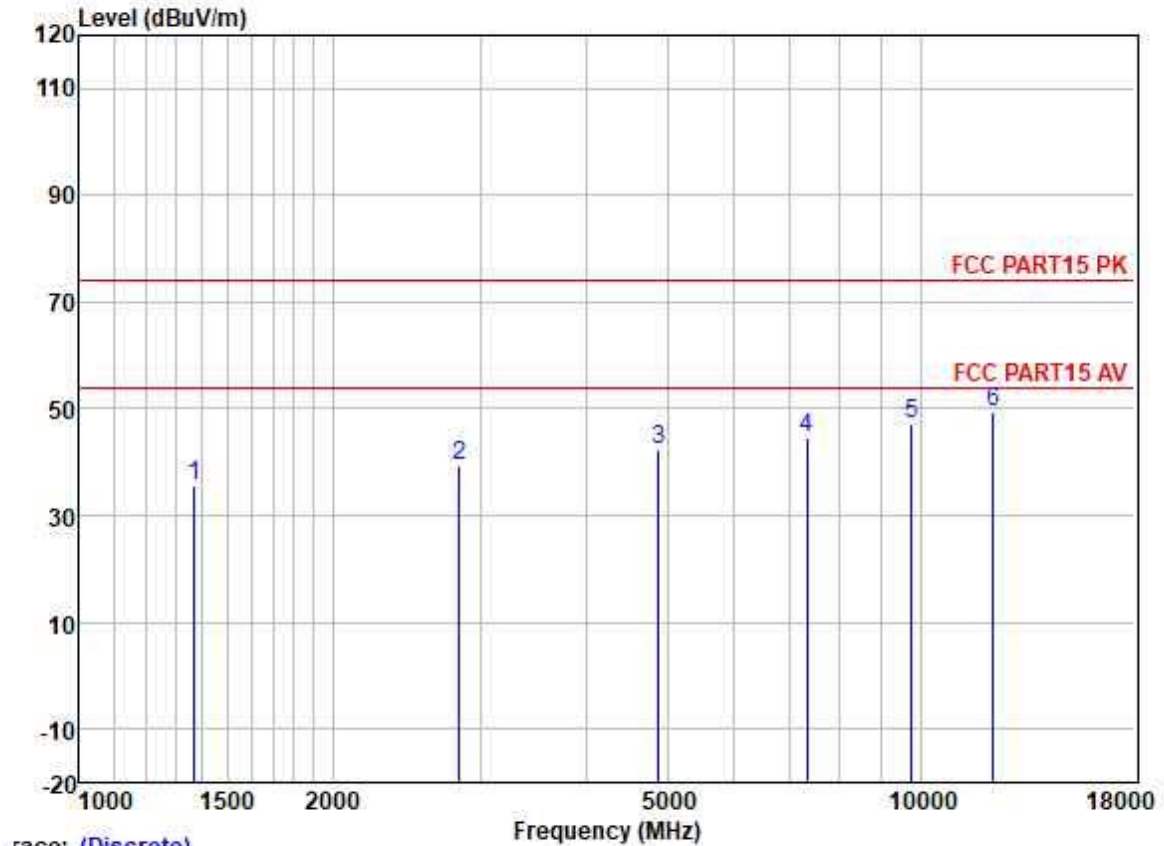


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1370.328	45.75	25.35	2.60	38.25	35.45	74.00	-38.55	VERTICAL	Peak
2	2830.728	44.85	28.20	3.70	37.40	39.35	74.00	-34.65	VERTICAL	Peak
3	4884.859	42.20	31.56	5.52	36.84	42.44	74.00	-31.56	VERTICAL	Peak
4	7326.292	39.91	36.00	6.13	37.43	44.61	74.00	-29.39	VERTICAL	Peak
5	9768.161	38.92	38.53	7.01	37.41	47.05	74.00	-26.95	VERTICAL	Peak
6	12210.020	39.45	38.74	8.08	37.00	49.27	74.00	-24.73	VERTICAL	Peak

Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High;

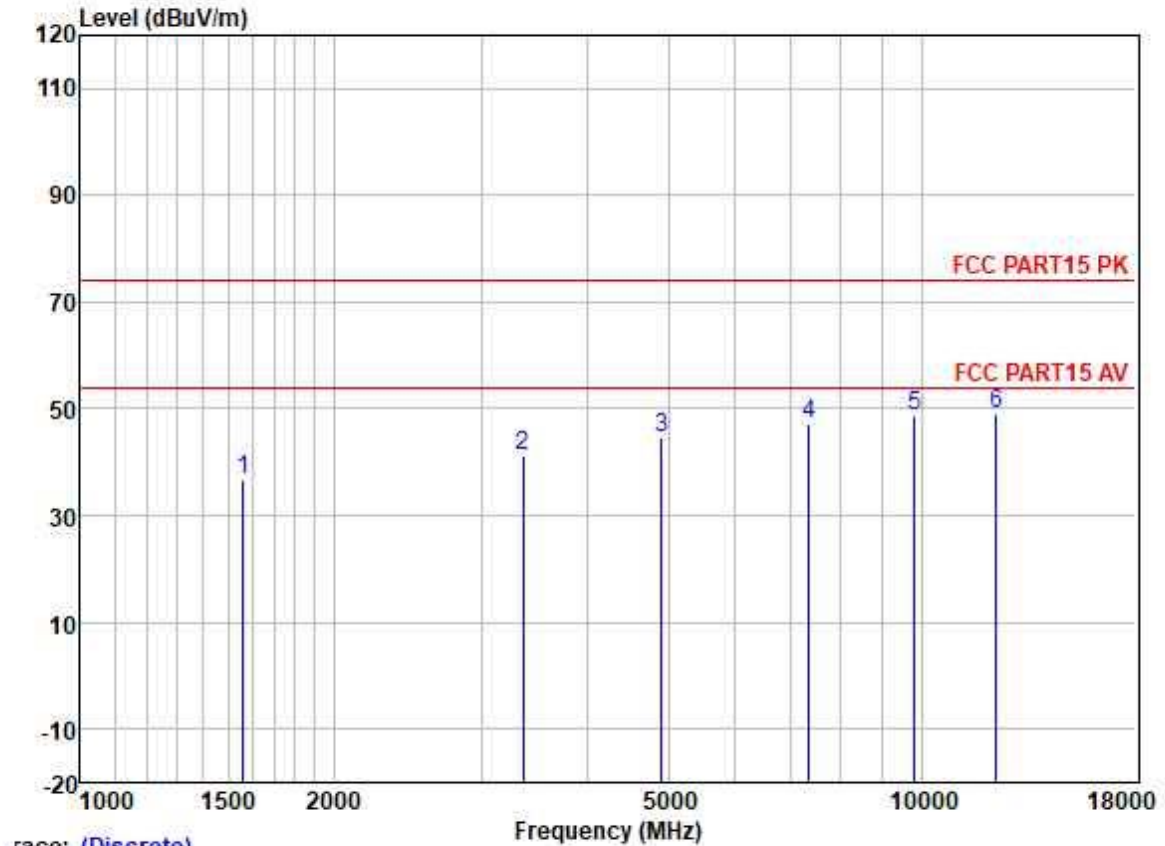


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1560.673	46.55	25.54	2.80	38.03	36.86	74.00	-37.14	VERTICAL	Peak
2	3357.061	45.27	28.81	4.09	37.01	41.16	74.00	-32.84	VERTICAL	Peak
3	4904.517	44.32	31.58	5.55	36.84	44.61	74.00	-29.39	VERTICAL	Peak
4	7356.265	42.40	36.06	6.15	37.44	47.17	74.00	-26.83	VERTICAL	Peak
5	9808.349	40.47	38.56	7.00	37.41	48.62	74.00	-25.38	VERTICAL	Peak
6	12260.780	39.42	38.70	8.06	36.98	49.20	74.00	-24.80	VERTICAL	Peak

Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low;

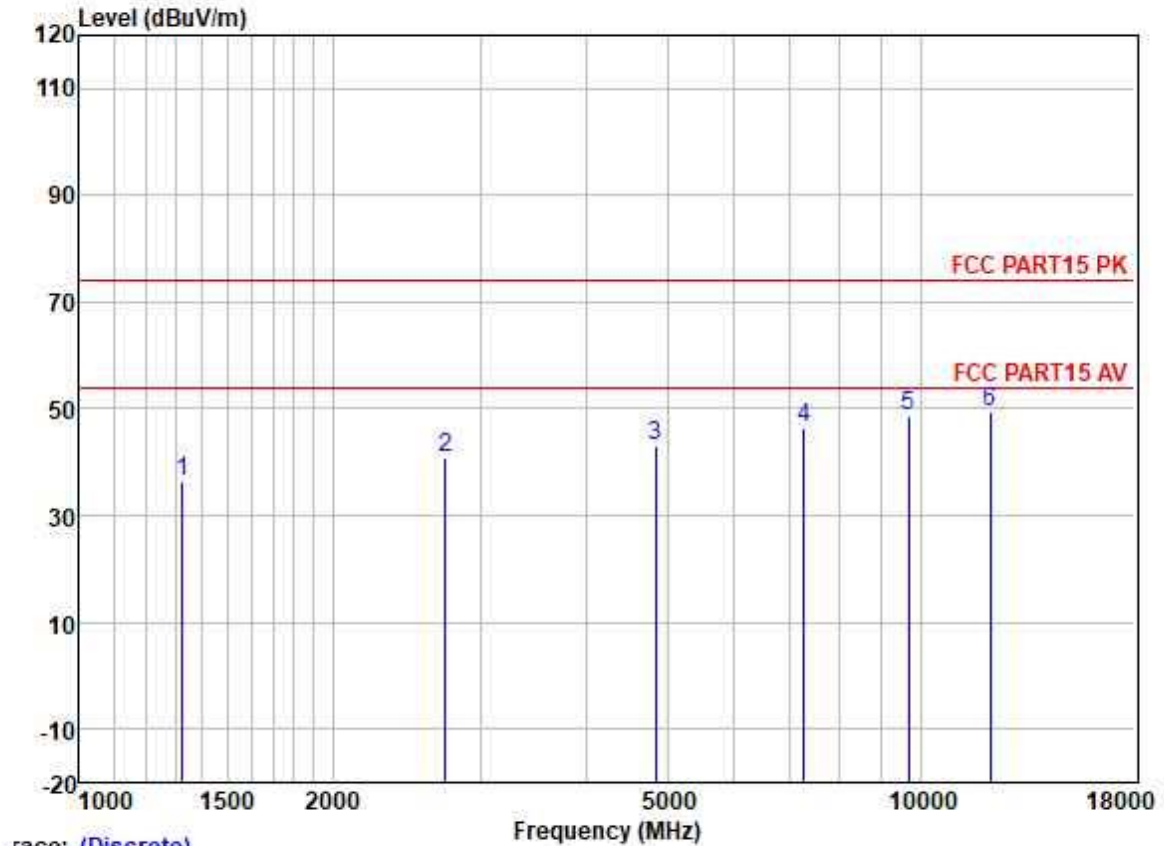

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1327.446	46.77	25.27	2.60	38.29	36.35	74.00	-37.65	VERTICAL	Peak
2	2726.337	46.67	27.92	3.62	37.46	40.75	74.00	-33.25	VERTICAL	Peak
3	4844.271	42.82	31.50	5.45	36.84	42.93	74.00	-31.07	VERTICAL	Peak
4	7266.536	41.89	35.78	6.06	37.41	46.32	74.00	-27.68	VERTICAL	Peak
5	9688.525	40.58	38.44	7.04	37.42	48.64	74.00	-25.36	VERTICAL	Peak
6	12110.560	39.36	38.83	8.14	37.05	49.28	74.00	-24.72	VERTICAL	Peak

Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:middle;

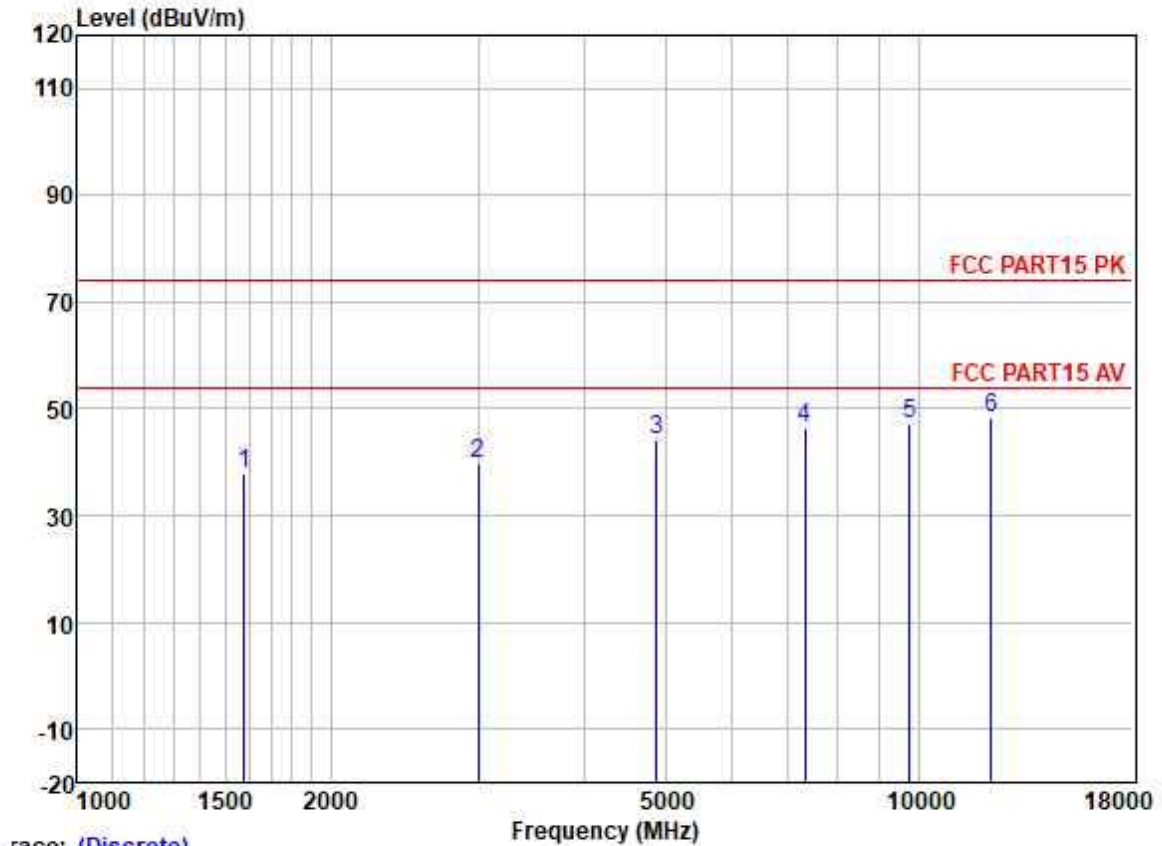

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1578.822	47.48	25.56	2.80	38.00	37.84	74.00	-36.16	VERTICAL	Peak
2	2999.187	44.75	28.40	3.80	37.25	39.70	74.00	-34.30	VERTICAL	Peak
3	4884.419	43.80	31.56	5.52	36.84	44.04	74.00	-29.96	VERTICAL	Peak
4	7326.353	41.66	36.00	6.13	37.43	46.36	74.00	-27.64	VERTICAL	Peak
5	9768.221	39.26	38.53	7.01	37.41	47.39	74.00	-26.61	VERTICAL	Peak
6	12210.850	38.68	38.74	8.08	37.00	48.50	74.00	-25.50	VERTICAL	Peak

8 Appendix

(Cable Loss=0.9 dB)

8.1 Appendix A: DTS Bandwidth

8.1.1 Test Result

TestMode	Antenna	Channel	DTS BW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
11B	Ant1	2412	10.160	2406.920	2417.080	>=0.5	PASS
	Ant2	2412	10.160	2406.920	2417.080	>=0.5	PASS
	Ant1	2442	10.160	2436.920	2447.080	>=0.5	PASS
	Ant2	2442	10.160	2436.920	2447.080	>=0.5	PASS
	Ant1	2462	10.120	2456.920	2467.040	>=0.5	PASS
	Ant2	2462	10.160	2456.920	2467.080	>=0.5	PASS
11G	Ant1	2412	16.360	2403.840	2420.200	>=0.5	PASS
	Ant2	2412	16.160	2404.040	2420.200	>=0.5	PASS
	Ant1	2442	16.080	2433.840	2449.920	>=0.5	PASS
	Ant2	2442	16.120	2433.800	2449.920	>=0.5	PASS
	Ant1	2462	15.760	2454.080	2469.840	>=0.5	PASS
	Ant2	2462	14.720	2454.440	2469.160	>=0.5	PASS
11N20SISO	Ant1	2412	16.080	2404.080	2420.160	>=0.5	PASS
	Ant2	2412	17.360	2403.440	2420.800	>=0.5	PASS
	Ant1	2442	16.640	2433.800	2450.440	>=0.5	PASS
	Ant2	2442	17.360	2433.200	2450.560	>=0.5	PASS
	Ant1	2462	17.640	2453.160	2470.800	>=0.5	PASS
	Ant2	2462	16.640	2453.800	2470.440	>=0.5	PASS
11N40SISO	Ant1	2422	34.800	2404.800	2439.600	>=0.5	PASS
	Ant2	2422	34.400	2405.280	2439.680	>=0.5	PASS
	Ant1	2442	35.200	2424.400	2459.600	>=0.5	PASS
	Ant2	2442	35.600	2424.080	2459.680	>=0.5	PASS
	Ant1	2452	35.440	2434.080	2469.520	>=0.5	PASS
	Ant2	2452	33.360	2434.320	2467.680	>=0.5	PASS
11N20MIMO	Ant1	2412	15.840	2404.120	2419.960	>=0.5	PASS
	Ant2	2412	15.560	2404.080	2419.640	>=0.5	PASS
	Ant1	2442	16.880	2433.600	2450.480	>=0.5	PASS
	Ant2	2442	16.880	2433.560	2450.440	>=0.5	PASS
	Ant1	2462	15.760	2454.080	2469.840	>=0.5	PASS
	Ant2	2462	16.680	2453.840	2470.520	>=0.5	PASS
11N40MIMO	Ant1	2422	34.240	2405.280	2439.520	>=0.5	PASS
	Ant2	2422	35.280	2404.400	2439.680	>=0.5	PASS
	Ant1	2442	35.280	2424.400	2459.680	>=0.5	PASS
	Ant2	2442	35.120	2424.400	2459.520	>=0.5	PASS
	Ant1	2452	35.200	2434.480	2469.680	>=0.5	PASS
	Ant2	2452	35.600	2434.080	2469.680	>=0.5	PASS




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


8.1.2 Test Graphs




11B_Ant1_2442

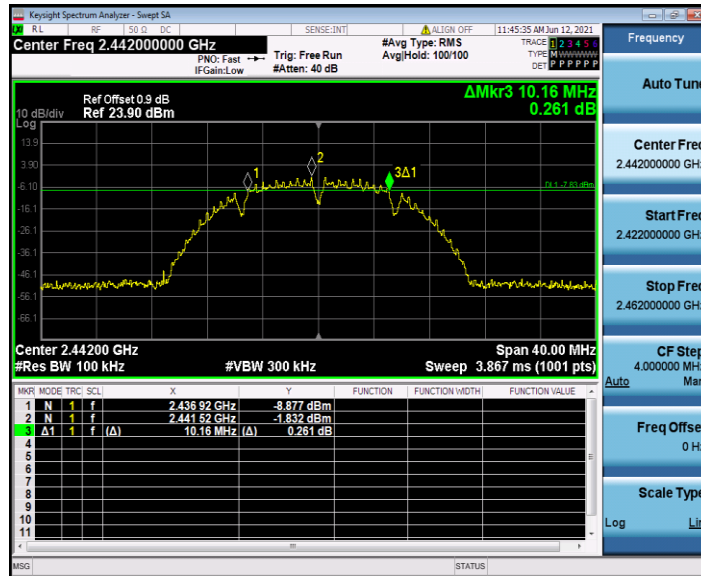

11B_Ant2_2442

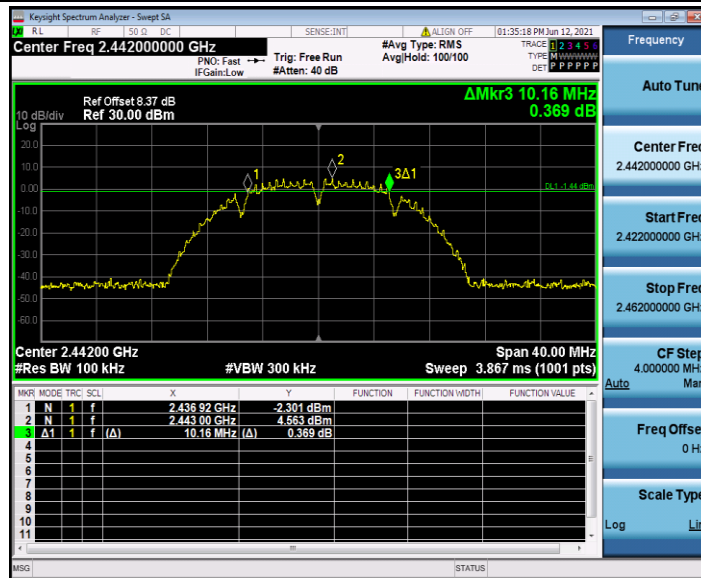


11B_Ant1_2462

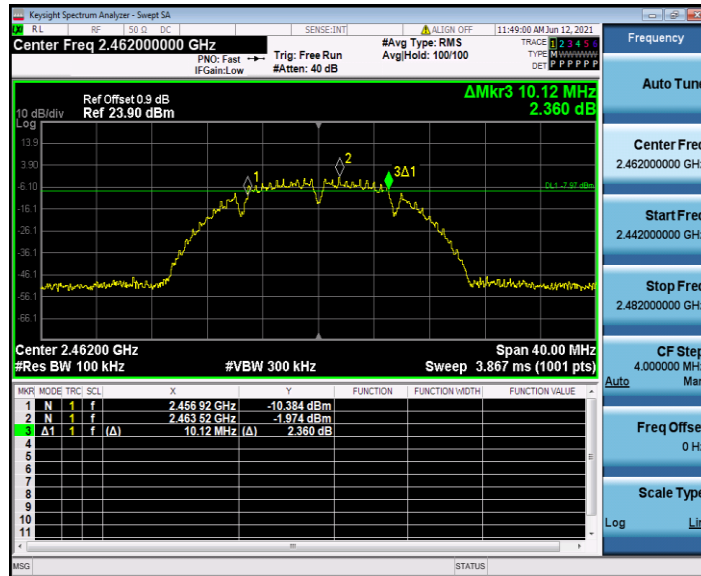


11B_Ant2_2462




11G_Ant1_2412

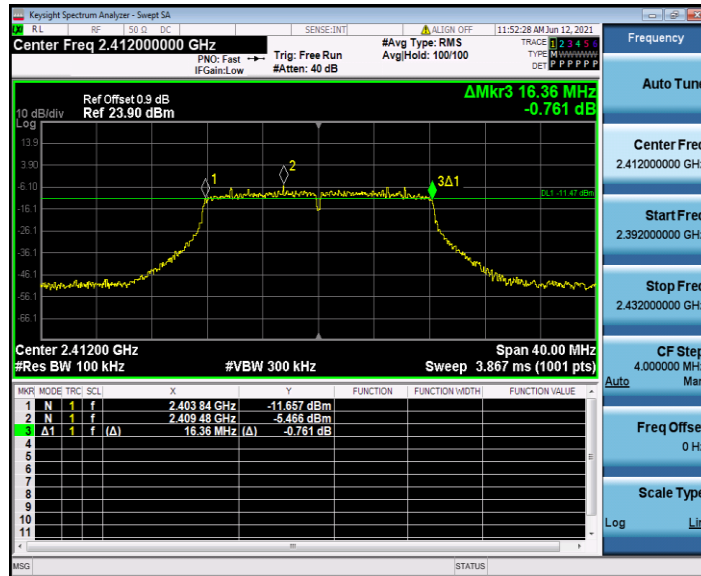


11G_Ant2_2412

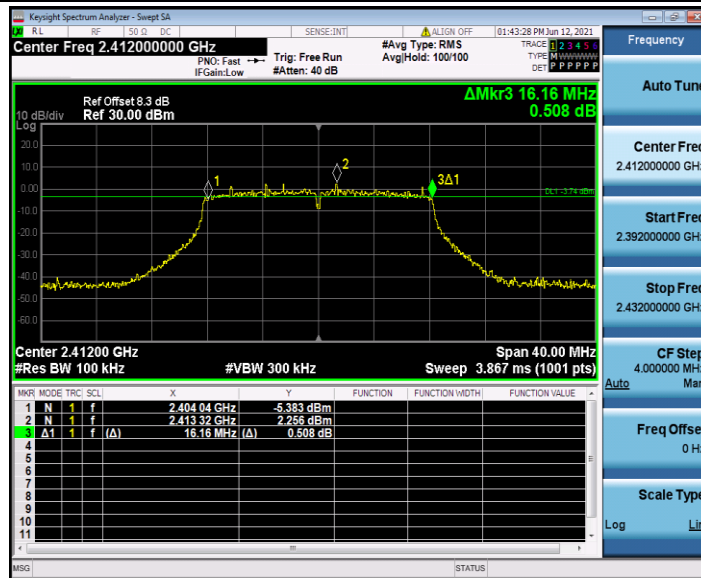


11G_Ant1_2442

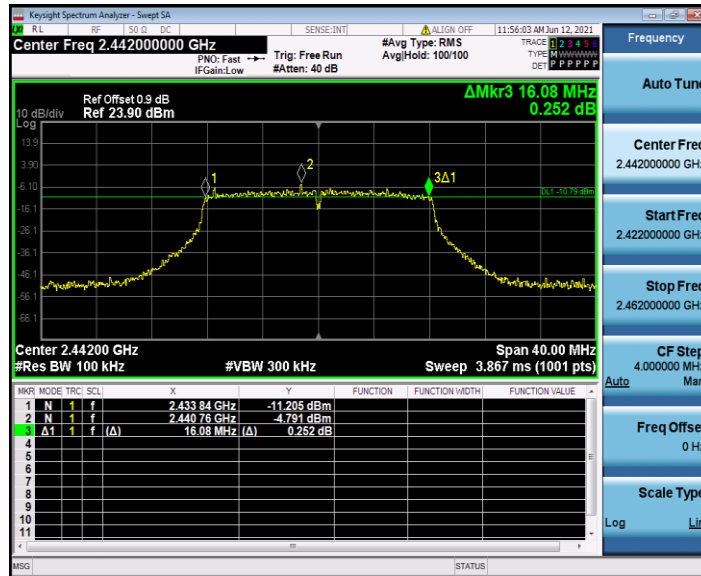


11G_Ant2_2442

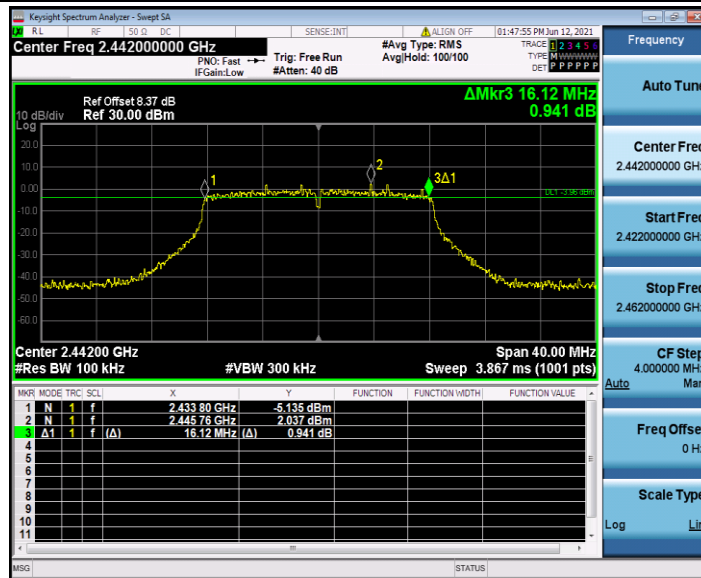


11G_Ant1_2462

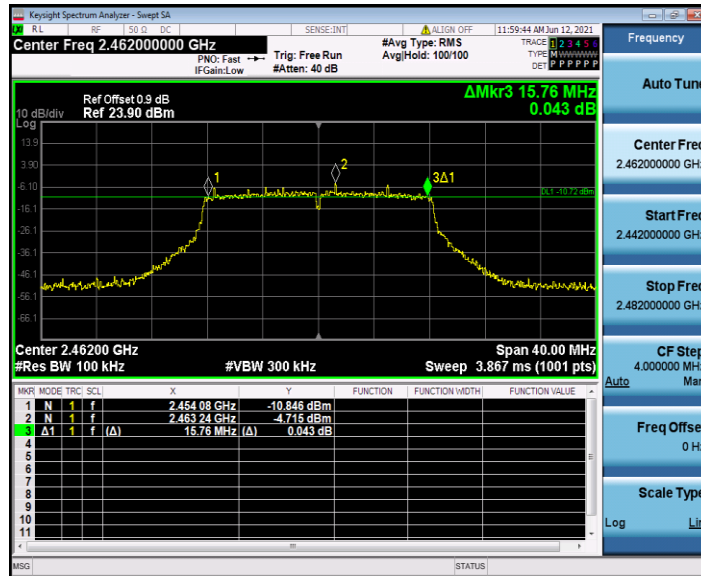


11G_Ant2_2462

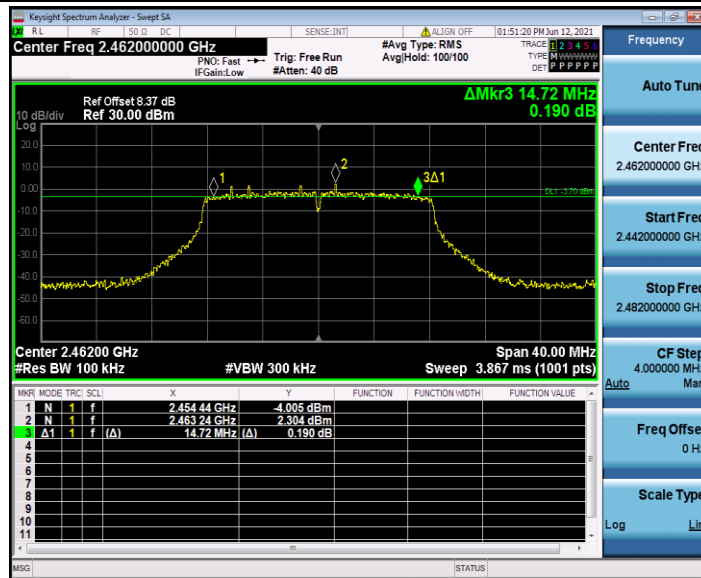


11N20SISO_Ant1_2412

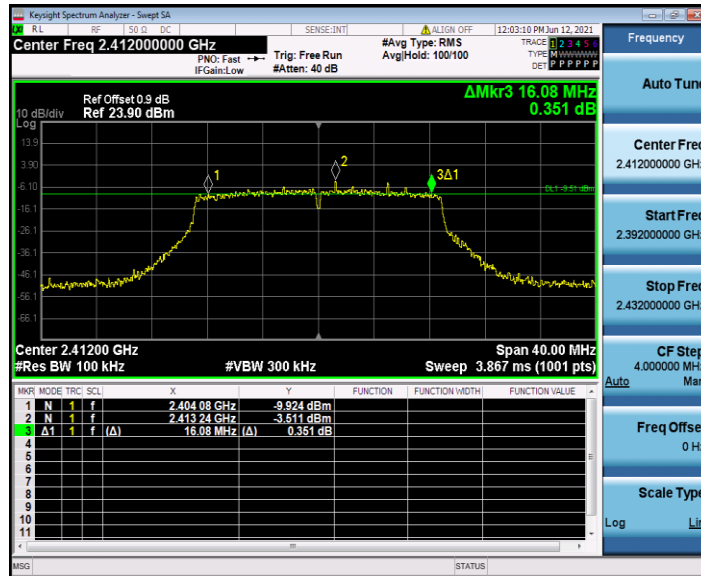


11N20SISO_Ant2_2412

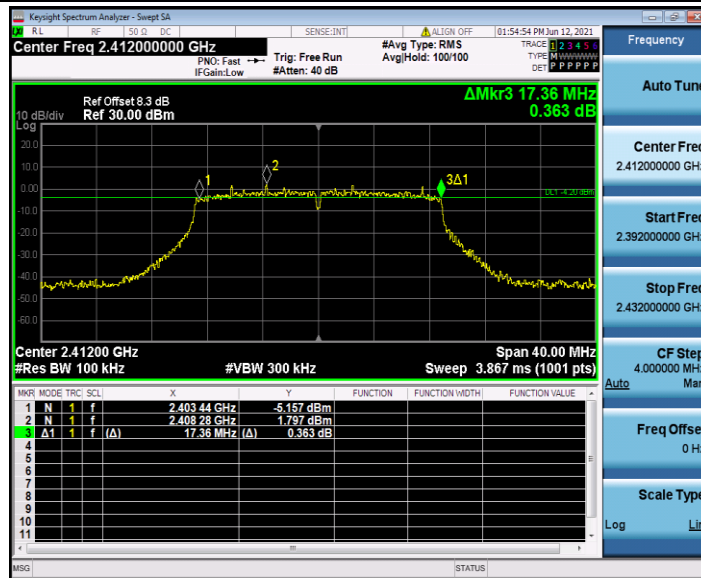


11N20SISO_Ant1_2442

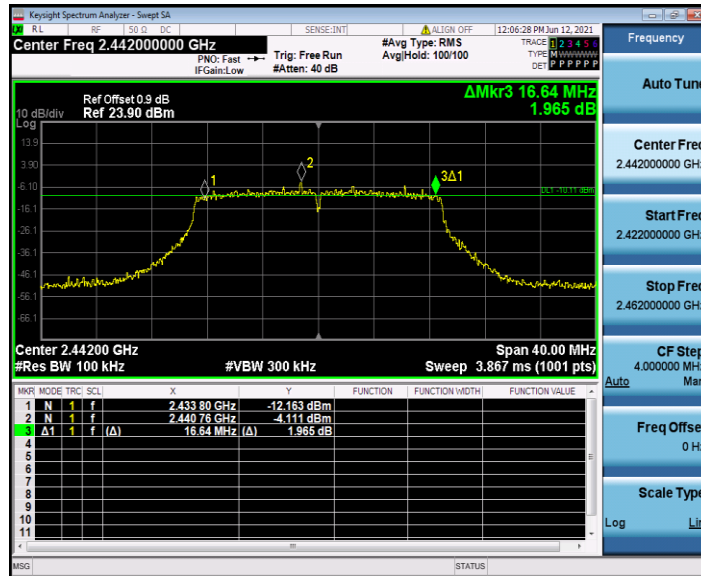


11N20SISO_Ant2_2442

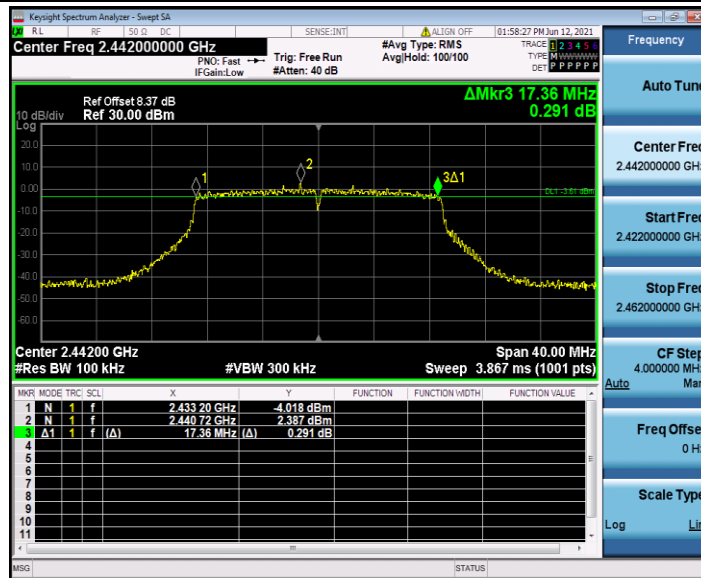

11N20SISO_Ant1_2462

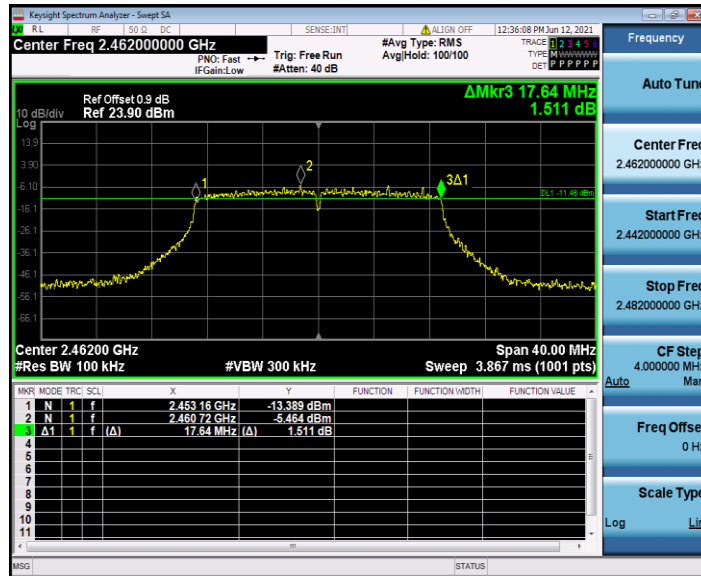


11N20SISO_Ant2_2462

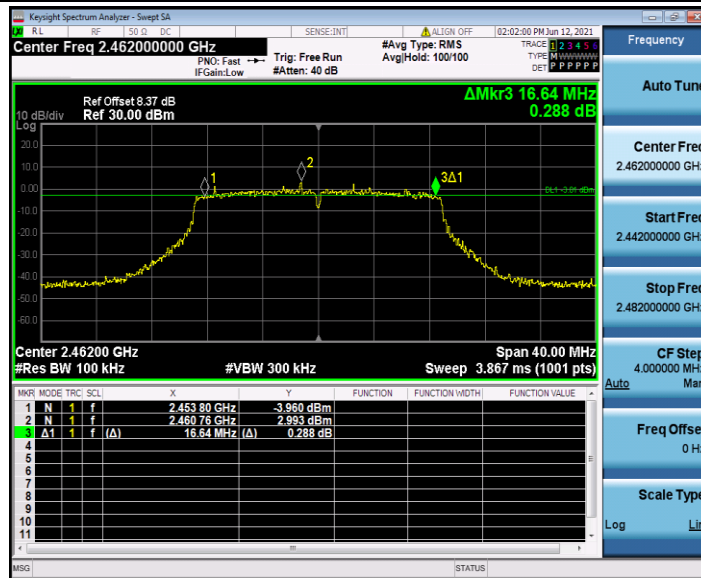


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


11N40SISO_Ant1_2422

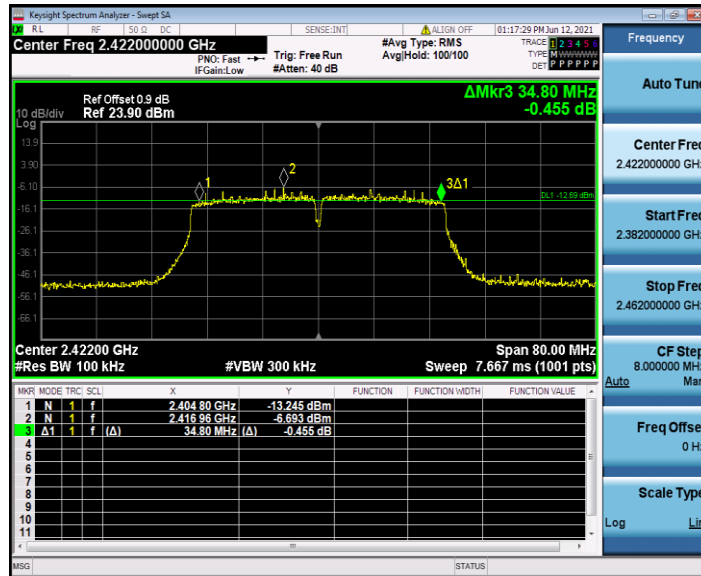


11N40SISO_Ant2_2422

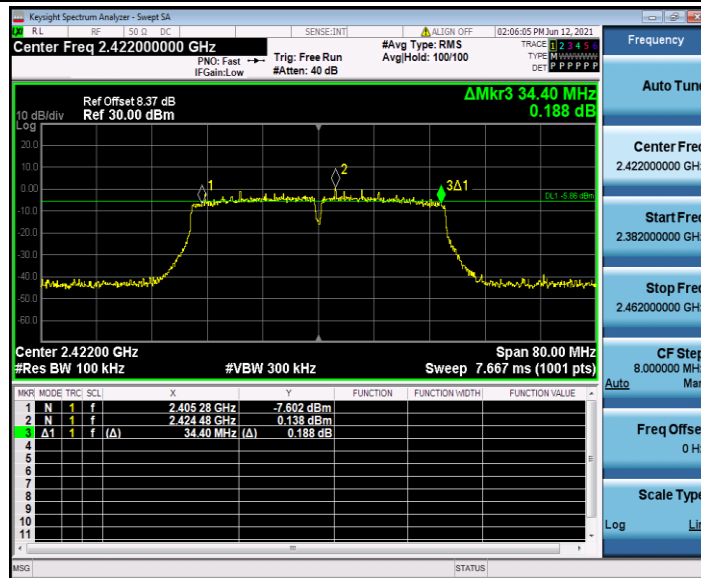

11N40SISO_Ant1_2442

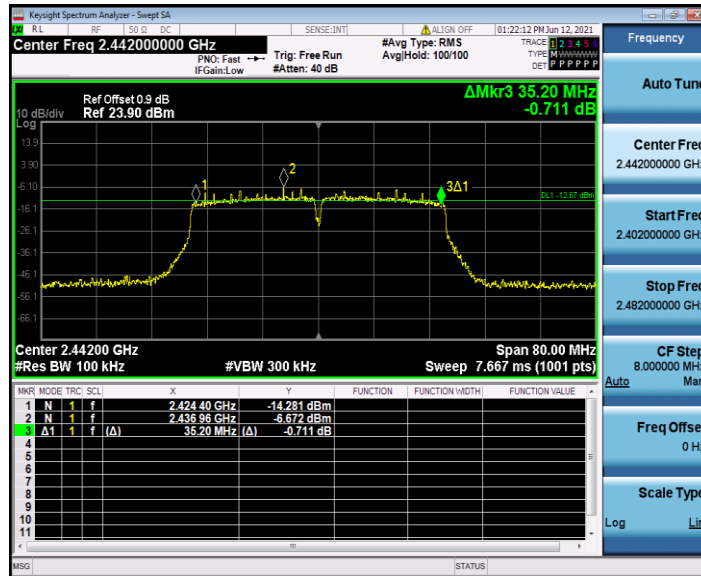


11N40SISO_Ant2_2442

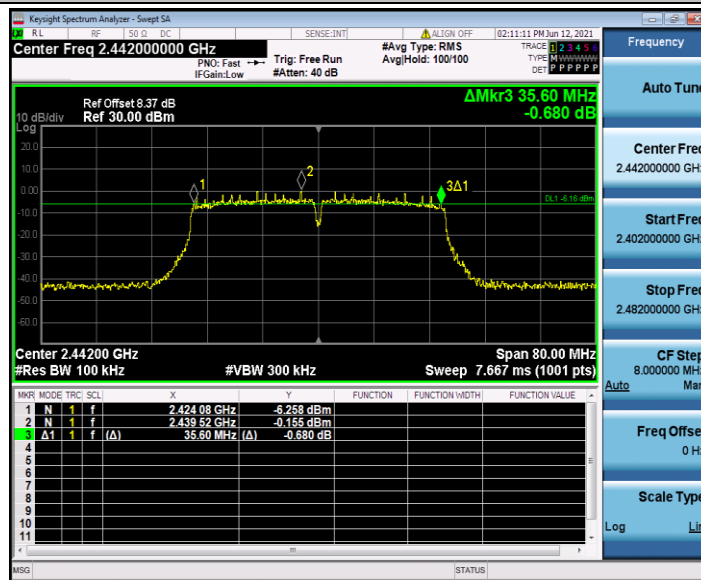


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


11N40SISO_Ant1_2452

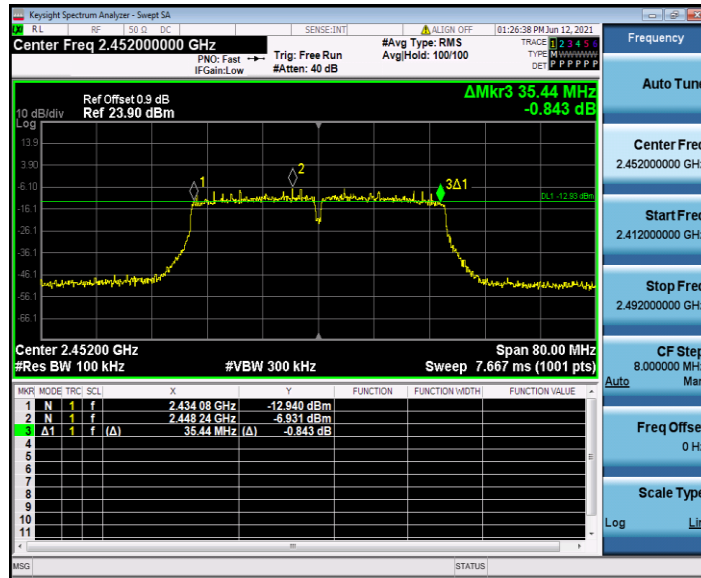

11N40SISO_Ant2_2452

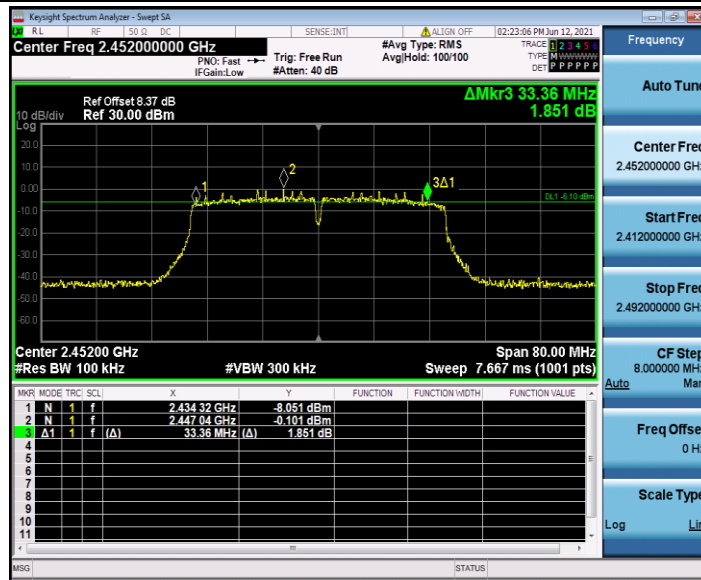

11N20MIMO_Ant1_2412

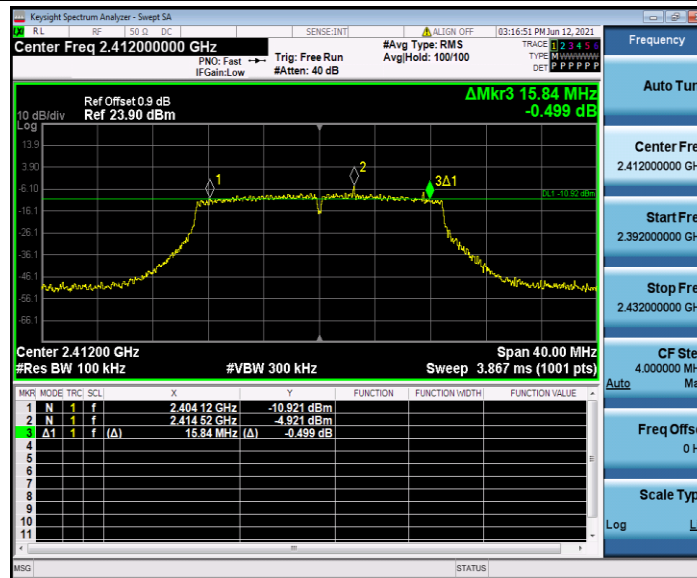

11N20MIMO_Ant2_2412

