



# FCC Test Report

**Test Report  
On Behalf of  
Shenzhen Velocity Technology Innovations Co., Ltd.  
For  
Power Bank**

**Model No.: VFC01, VFC01A, VFC01C**

**FCC ID: 2BGR9-VFC01**

**Prepared For :** Shenzhen Velocity Technology Innovations Co., Ltd.  
Room 301, Building C, Phase 2, Galaxy WORLD, Minle Community, Minzhi  
Subdistrict, Longhua District, Shenzhen, China

**Prepared By :** Shenzhen HUAKE Testing Technology Co., Ltd.  
1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping,  
Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**Date of Test:** Jan. 09, 2025 ~ Mar. 11, 2025

**Date of Report:** Mar. 11, 2025

**Report Number:** HK2501090194-E



## Test Result Certification

**Applicant's Name** ..... : Shenzhen Velocity Technology Innovations Co., Ltd.  
**Address** ..... : Room 301, Building C, Phase 2, Galaxy WORLD, Minle  
Community, Minzhi Subdistrict, Longhua District, Shenzhen, China  
**Manufacturer's Name** ..... : Shenzhen Velocity Technology Innovations Co., Ltd.  
**Address** ..... : Room 301, Building C, Phase 2, Galaxy WORLD, Minle  
Community, Minzhi Subdistrict, Longhua District, Shenzhen, China

### Product Description

**Trade Mark** ..... : iVANKY  
**Product Name** ..... : Power Bank  
**Model and/or Type Reference** : VFC01, VFC01A, VFC01C

**Standards** ..... : FCC CFR 47 PART 18

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Date of Test** ..... :  
**Date (s) of performance of tests** ..... : Jan. 09, 2025 ~ Mar. 11, 2025  
**Date of Issue** ..... : Mar. 11, 2025  
**Test Result** ..... : Pass

Testing Engineer

Len Liao

Technical Manager

Sliver Wan

Authorized Signatory

Jason Zhou

**Table of Contents****Page**

1 . Test Summary	5
1.1 . Test Procedures and Results	5
1.2 . Information of the Test Laboratory	5
1.3 . Measurement Uncertainty	5
2. General Information	6
2.1. General Description of EUT	6
2.2. Carrier Frequency of Channels	7
2.3. Test Mode	7
2.4. Description of Test Setup	8
2.5. Description of Support Units	9
2.6. Measurement Instruments List	10
3. Conducted Emission Test	12
3.1. Block Diagram of Test Setup	12
3.2. Conducted Power Line Emission Limit	12
3.3. Test Procedure	12
4. Radiated Emissions	15
4.1. Block Diagram of Test Setup	15
4.2. Rules and Specifications	16
4.3. Test Procedure	16
4.4. Test Result	17
5. Antenna Requirement	23
6. Photographs of Test	24
7. Photos of the EUT	27



**\*\* Modified History \*\***

Revision	Description	Issued Data	Remark
Revision 1.0	Initial Test Report Release	Mar. 11, 2025	Jason Zhou



## 1. Test Summary

### 1.1. Test Procedures and Results

Description of Test	Section Number	Result
Conducted Emissions Test	18.307	COMPLIANT
Radiated Emission Test	18.305	COMPLIANT

**Note:**

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

### 1.2. Information of the Test Laboratory

Shenzhen HUAKE Testing Technology Co., Ltd.

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Testing Laboratory Authorization:

A2LA Accreditation Code is 4781.01.

FCC Designation Number is CN1229.

Canada IC CAB identifier is CN0045.

CNAS Registration Number is L9589.

### 1.3. Measurement Uncertainty

Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.71dB, k=2

Radiated emission expanded uncertainty(9kHz-30MHz) = 3.90dB, k=2

Radiated emission expanded uncertainty(30MHz-1000MHz) = 3.90dB, k=2

Radiated emission expanded uncertainty(Above 1GHz) = 4.28dB, k=2



## 2. General Information

### 2.1. General Description of EUT

Equipment:	Power Bank
Model Name:	VFC01
Series Models:	VFC01A, VFC01C
Model Difference:	All model's the function, software and electric circuit are the same, only with a product model named different. Test sample mode: VFC01.
Trade Mark:	iVANKY
FCC ID:	2BGR9-VFC01
Antenna Type:	Coil Antenna
Operation Frequency:	Mobile Phone+Earphone:112KHz~205KHz Watch: 314KHz
Test Frequency:	Mobile Phone:125KHz Earphone: 131KHz Watch:314KHz
Modulation Type:	ASK
Power Source:	Type-C Input: 5V, 3.0A or 9V, 2.0A or 12V, 1.5A Type-C Output: 5V, 3.0A or 9V, 2.22A or 12V, 1.67A Wireless Output: 2.5W or 5W or 7.5W or 10W or15W Battery capacity: 5000mAh
Power Rating:	Type-C Input: 5V, 3.0A or 9V, 2.0A or 12V, 1.5A Type-C Output: 5V, 3.0A or 9V, 2.22A or 12V, 1.67A Wireless Output: 2.5W or 5W or 7.5W or 10W or15W Battery capacity: 5000mAh
<b>Note:</b> <ol style="list-style-type: none"><li>1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.</li><li>2. Antenna gain values are provided by the customer.</li><li>3. The cable loss data is obtained from the supplier.</li><li>4. The test results in the report only apply to the tested sample.</li></ol>	



## 2.2. Carrier Frequency of Channels

Operation Frequency each of channel	
Channel	Frequency
Middle CH 1	125KHz
Middle CH 2	131KHz
Middle CH 3	314KHz

## 2.3. Test Mode

Test Item	Test mode	Description
Radiated & Conducted test cases	Mode 1	AC/DC Adapter+ EUT + Mobile Phone (Battery Status: <1%)
	Mode 2	AC/DC Adapter+ EUT + Mobile Phone (Battery Status: <50%)
	Mode 3	AC/DC Adapter+ EUT + Mobile Phone (Battery Status: >95%)
	Mode 4	EUT + Mobile Phone (Battery Status: <1%)
	Mode 5	EUT + Mobile Phone (Battery Status: <50%)
	Mode 6	EUT + Mobile Phone (Battery Status: >95%)
	Mode 7	AC/DC Adapter+ EUT + Watch (Battery Status: <1%)
	Mode 8	AC/DC Adapter+ EUT + Watch (Battery Status: <50%)
	Mode 9	AC/DC Adapter+ EUT + Watch (Battery Status: >95%)
	Mode 10	EUT + Watch (Battery Status: <1%)
	Mode 11	EUT + Watch (Battery Status: <50%)
	Mode 12	EUT + Watch (Battery Status: >95%)
	Mode 13	AC/DC Adapter+ EUT + Earphone (Battery Status: <1%)
	Mode 14	AC/DC Adapter+ EUT + Earphone (Battery Status: <50%)
	Mode 15	AC/DC Adapter+ EUT + Earphone (Battery Status: >95%)
	Mode 16	EUT + Earphone (Battery Status: <1%)
	Mode 17	EUT + Earphone (Battery Status: <50%)
	Mode 18	EUT + Earphone (Battery Status: >95%)


**Note:**

1. All modes and configurations above have been tested, Only the result of the worst case was recorded in the report.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
3. The Mobile Phone, Earphone and Watch provided by Lab.
4. According to the manufacturer's design principle, the wireless charging power will reach its maximum when the client device's battery level is between 1% and 10%.




## 2.4. Description of Test Setup

Operation of EUT during conducted testing and radiation testing: (AC mode)

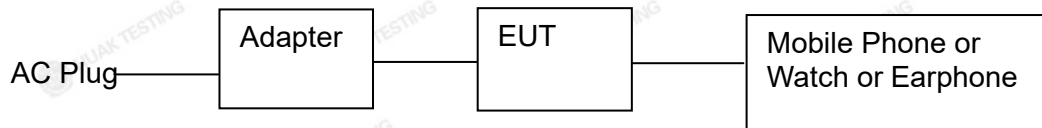

Operation of EUT during radiation testing: (DC mode)



The sample was placed (0.8m (30MHz~1GHz), 0.8m (9KHz~30MHz)) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. The worst case is X position.



## 2.5. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Trade Mark	Model/Type No.	Specification	Remark
1	Power Bank	iVANKY	VFC01	N/A	EUT
2	Adapter	N/A	CD289	Input: AC100-240V, 50/60Hz, 2A Max USB-C1 Output: DC5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A, 28V/5A 140W MAX USB-C2 Output: DC5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A 100W MAX USB-A Output: DC5V/4.5A, 4.5V/5A, 5V/3A, 9V/2A, 12V/1.5A 22.5W MAX Total Output: 140W Max	Peripheral
3	USB Cable	N/A	N/A	Length: 1.0m	Peripheral
4	Mobile phone	Apple	iPhone 14	N/A	Peripheral
5	Watch	Apple	Apple Watch Series 8	N/A	Peripheral
6	Earphone	N/A	N/A	N/A	Peripheral

### Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, 6dB Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.

**2.6. Measurement Instruments List**

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N.	R&S	ENV216	HKE-002	Feb. 20, 2024	1 Year
2.	L.I.S.N.	R&S	ENV216	HKE-059	Feb. 20, 2024	1 Year
3.	EMI Test Receiver	R&S	ESR	HKE-005	Feb. 20, 2024	1 Year
4.	Spectrum analyzer	Agilent	N9020A	HKE-048	Feb. 20, 2024	1 Year
5.	Spectrum analyzer	R&S	FSV3044	HKE-126	Feb. 20, 2024	1 Year
6.	Preamplifier	EMCI	EMC051845 S	HKE-006	Feb. 20, 2024	1 Year
7.	Preamplifier	Schwarzbeck	BBV 9743	HKE-016	Feb. 20, 2024	1 Year
8.	Preamplifier	A.H. Systems	SAS-574	HKE-182	Feb. 20, 2024	1 Year
9.	6dB Attenuator	Pasternack	6db	HKE-184	Feb. 20, 2024	1 Year
10.	EMI Test Receiver	Rohde & Schwarz	ESR-7	HKE-010	Feb. 20, 2024	1 Year
11.	Broadband Antenna	Schwarzbeck	VULB9168	HKE-167	Feb. 21, 2024	2 Year
12.	Loop Antenna	COM-POWER	AL-130R	HKE-014	Feb. 21, 2024	2 Year
13.	Horn Antenna	Schwarzbeck	9120D	HKE-013	Feb. 21, 2024	2 Year
14.	EMI Test Software	Tonscend	JS32-CE 2.5.0.6	HKE-081	/	/
15.	EMI Test Software	Tonscend	JS32-RE 5.0.0	HKE-082	/	/
16.	10dB Attenuator	Schwarzbeck	VTSD9561F	HKE-153	Feb. 20, 2024	1 Year




Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N.	R&S	ENV216	HKE-002	Feb. 19, 2025	1 Year
2.	L.I.S.N.	R&S	ENV216	HKE-059	Feb. 19, 2025	1 Year
3.	EMI Test Receiver	R&S	ESR	HKE-005	Feb. 19, 2025	1 Year
4.	Spectrum analyzer	Agilent	N9020A	HKE-048	Feb. 19, 2025	1 Year
5.	Spectrum analyzer	R&S	FSV3044	HKE-126	Feb. 19, 2025	1 Year
6.	Preamplifier	EMCI	EMC051845 S	HKE-006	Feb. 19, 2025	1 Year
7.	Preamplifier	Schwarzbeck	BBV 9743	HKE-016	Feb. 19, 2025	1 Year
8.	Preamplifier	A.H. Systems	SAS-574	HKE-182	Feb. 19, 2025	1 Year
9.	6dB Attenuator	Pasternack	6db	HKE-184	Feb. 19, 2025	1 Year
10.	EMI Test Receiver	Rohde & Schwarz	ESR-7	HKE-010	Feb. 19, 2025	1 Year
11.	Broadband Antenna	Schwarzbeck	VULB9168	HKE-167	Feb. 21, 2024	2 Year
12.	Loop Antenna	COM-POWER	AL-130R	HKE-014	Feb. 21, 2024	2 Year
13.	Horn Antenna	Schwarzbeck	9120D	HKE-013	Feb. 21, 2024	2 Year
14.	EMI Test Software	Tonscend	JS32-CE 2.5.0.6	HKE-081	/	/
15.	EMI Test Software	Tonscend	JS32-RE 5.0.0	HKE-082	/	/
16.	10dB Attenuator	Schwarzbeck	VTSD9561F	HKE-153	Feb. 19, 2025	1 Year



### 3. Conducted Emission Test

#### 3.1. Block Diagram of Test Setup

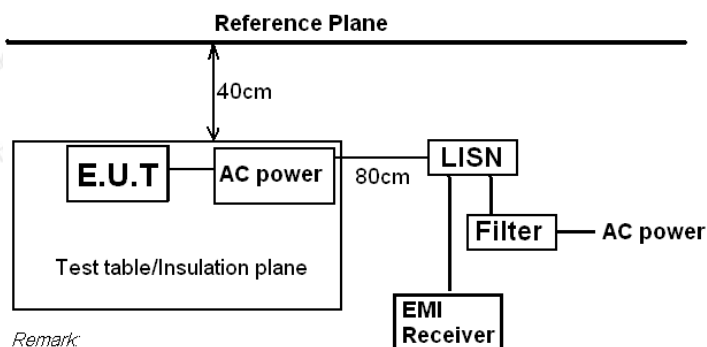

Remark:

E.U.T: Equipment Under Test

LISN: Line Impedance Stabilization Network

Test table height=0.8m

#### 3.2. Conducted Power Line Emission Limit

According to FCC Part 18.307(b)

Frequency (MHz)	Maximum RF Line Voltage (dBμV)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

\* Decreasing linearly with the logarithm of the frequency

For intentional device, according to §18.307 Line Conducted Emission Limit is same as above table.

#### 3.3. Test Procedure

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.




### 3.4. Test Result

PASS

All the test modes completed for test. Only the worst result(Mobile Phone AC Working Full Load) was reported as below:

Test Specification: Line

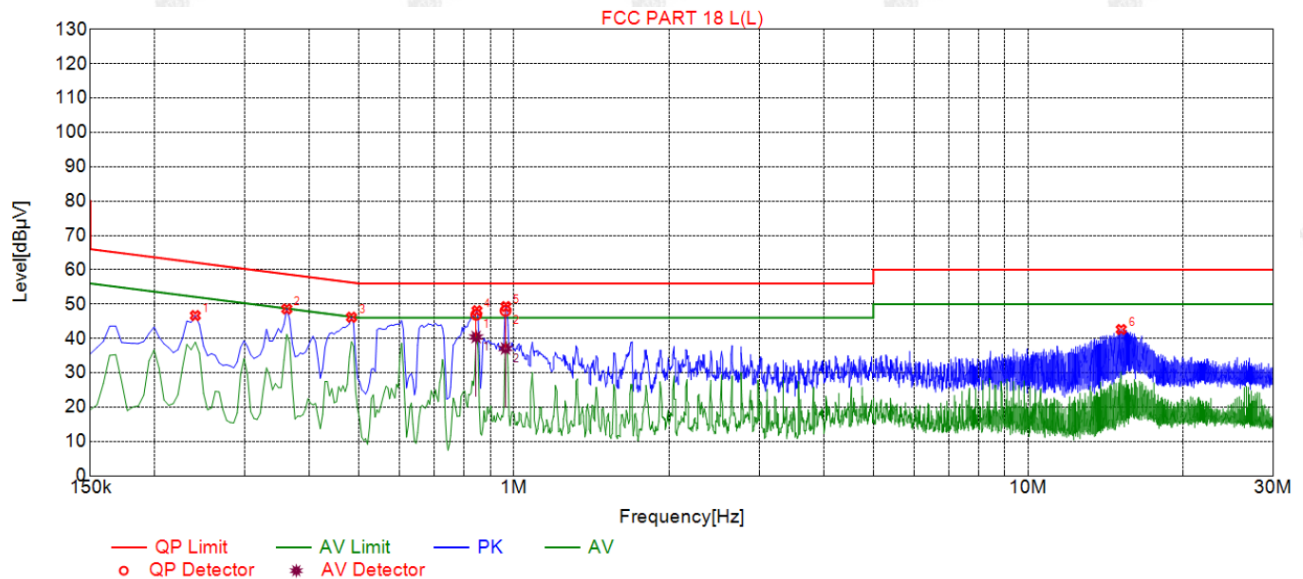

### Suspected List

NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Reading [dBμV]	Detector	Type
1	0.2400	46.66	19.83	62.18	15.52	26.83	PK	L
2	0.3615	48.57	19.84	58.73	10.16	28.73	PK	L
3	0.4830	46.17	19.84	56.30	10.13	26.33	PK	L
4	0.8475	48.08	19.87	56.00	7.92	28.21	PK	L
5	0.9645	49.29	19.87	56.00	6.71	29.42	PK	L
6	15.1755	42.61	19.81	60.00	17.39	22.80	PK	L

### Final Data List

NO.	Freq. [MHz]	Correction factor[dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	QP Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	AV Reading [dBμV]	Type
1	0.8441	19.87	46.89	56.00	9.11	27.02	40.41	46.00	5.59	20.54	L
2	0.9628	19.87	48.06	56.00	7.94	28.19	37.08	46.00	8.92	17.21	L


Remark: Margin = Limit – Level

Correction factor = Cable lose + ISN insertion loss

Level=Test receiver reading + correction factor



Test Specification: Neutral

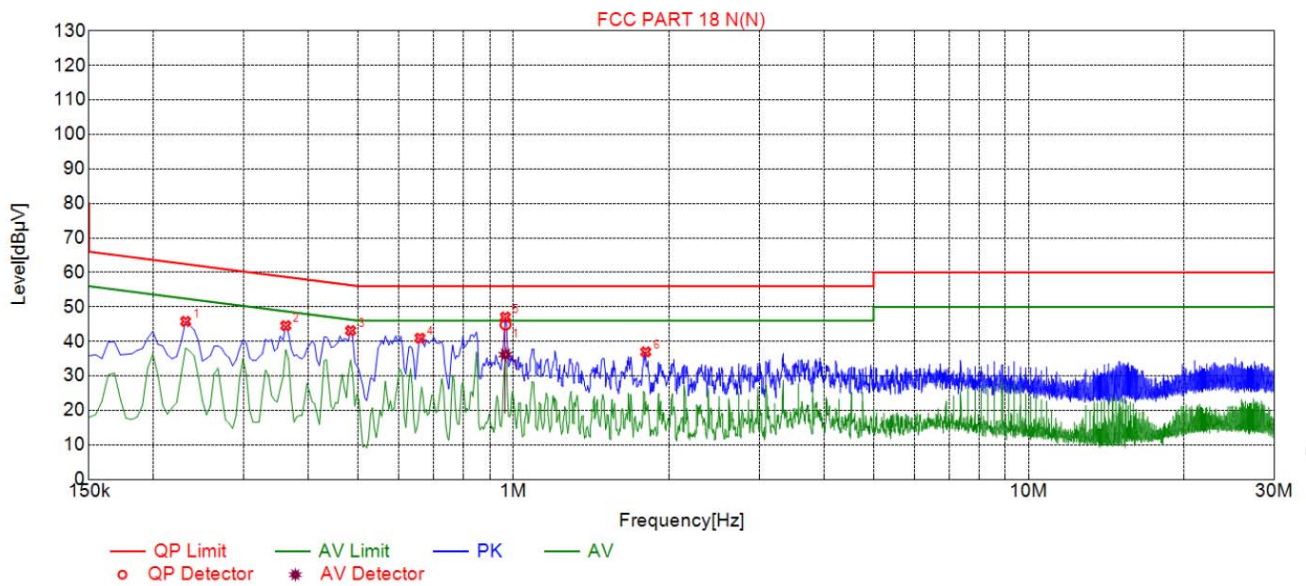

## Suspected List

NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Reading [dBμV]	Detector	Type
1	0.2310	45.80	19.73	62.43	16.63	26.07	PK	N
2	0.3615	44.56	19.73	58.73	14.17	24.83	PK	N
3	0.4830	43.13	19.73	56.30	13.17	23.40	PK	N
4	0.6585	40.95	19.74	56.00	15.05	21.21	PK	N
5	0.9645	47.06	19.74	56.00	8.94	27.32	PK	N
6	1.8060	36.96	19.83	56.00	19.04	17.13	PK	N

## Final Data List

NO.	Freq. [MHz]	Correction factor[dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	QP Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	AV Reading [dBμV]	Type
1	0.9649	19.74	44.86	56.00	11.14	25.12	36.17	46.00	9.83	16.43	N

Remark: Margin = Limit – Level



Correction factor = Cable lose + ISN insertion loss

Level=Test receiver reading + correction factor



## 4. Radiated Emissions

### 4.1. Block Diagram of Test Setup

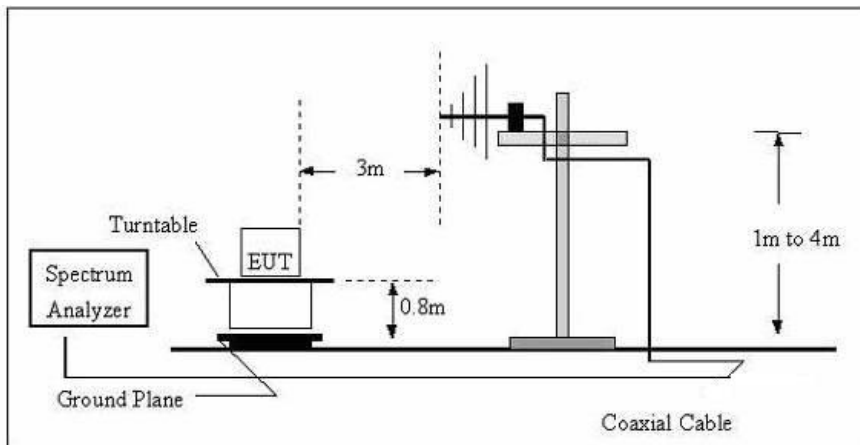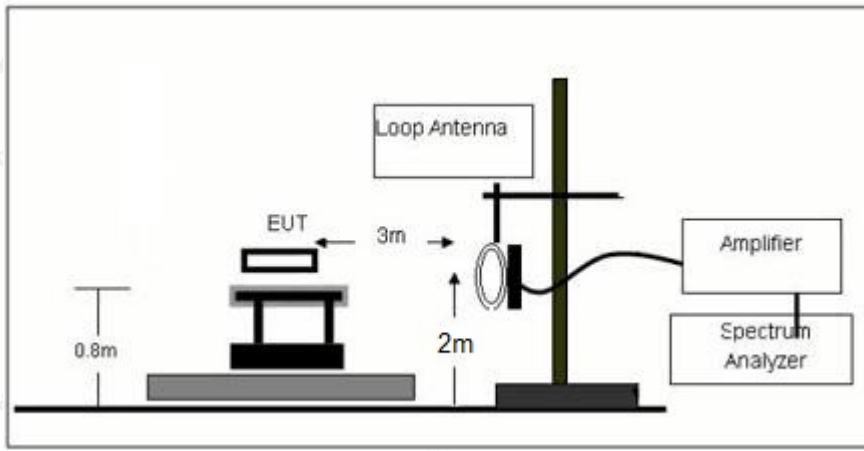



## 4.2. Rules and Specifications

Except as provided elsewhere in this Subpart 18.305 (b), the field strength levels of emissions which lie outside the bands specified in §18.301, unless otherwise indicated, shall not exceed the following table:

Equipment	Operating frequency	RF Power generated by equipment (watts)	Field strength limit (uV/m)	Distance (meters)
(miscellaneous)				
	Any non-ISM frequency	Below 500 500 or more	15 15 × SQRT(power/500)	300 1300

Remark:

- (1) Emission level dBuV/m for 0.009~30MHz =  $20\log(15) + 40\log(300/3)$  dBuV/m;
- (2) Calculated according FCC 18.305.
- (3) The smaller limit shall apply at the cross point between two frequency bands.
- (4) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

## 4.3. Test Procedure

Measurement distance 3m

For the measurement range up to 30MHz in the following plots the field strength result from 3m  
Distance measurements are extrapolated to 300m and 30m distance respectively, by 40dB/decade, Per antenna factor scaling.

Measurements below 1000MHz are performed with a peak detector and compared to average limits,  
Measurements with an average detector are not required.




#### 4.4. Test Result

PASS

Note: All the test modes completed for test. Only the worst result Mobile Phone Full Load was reported as below:

For 9KHz - 30MHz

DC Mode:

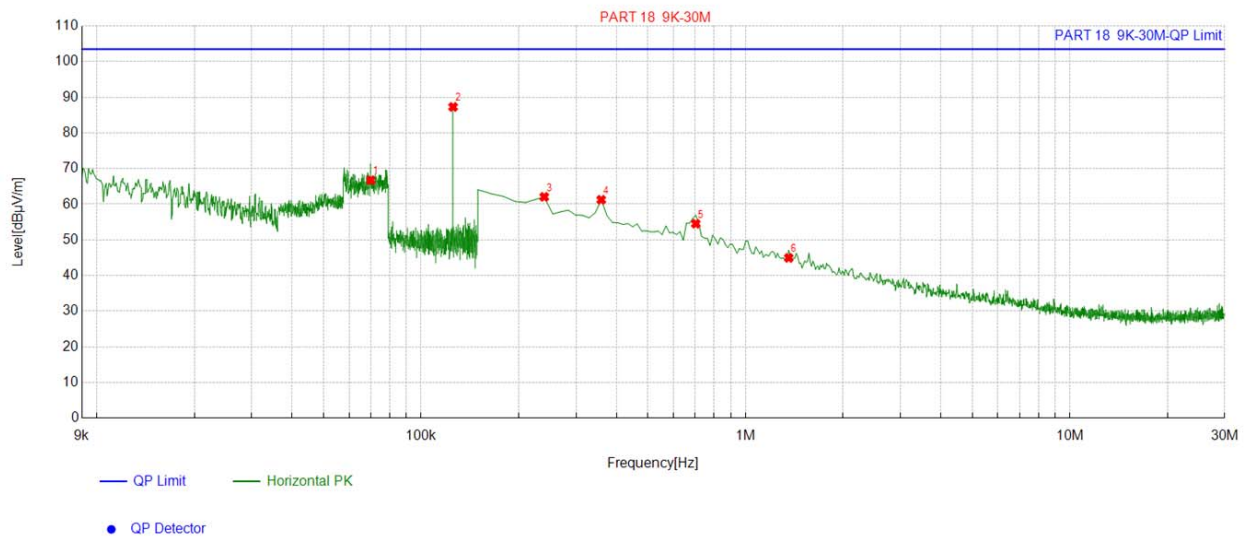

#### Suspected List


NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]
1	0.069942	20.48	46.28	66.76	103.50	32.05
2	0.125454	20.40	66.89	87.29	103.50	16.21
3	0.239595	20.27	41.80	62.07	103.50	41.43
4	0.359055	20.09	41.16	61.25	103.50	42.25
5	0.702501	20.25	34.28	54.53	103.50	46.54
6	1.35953	20.49	24.46	44.95	103.50	56.40

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor;  
Margin = Limit – Level



For 9KHz - 30MHz

AC Mode:

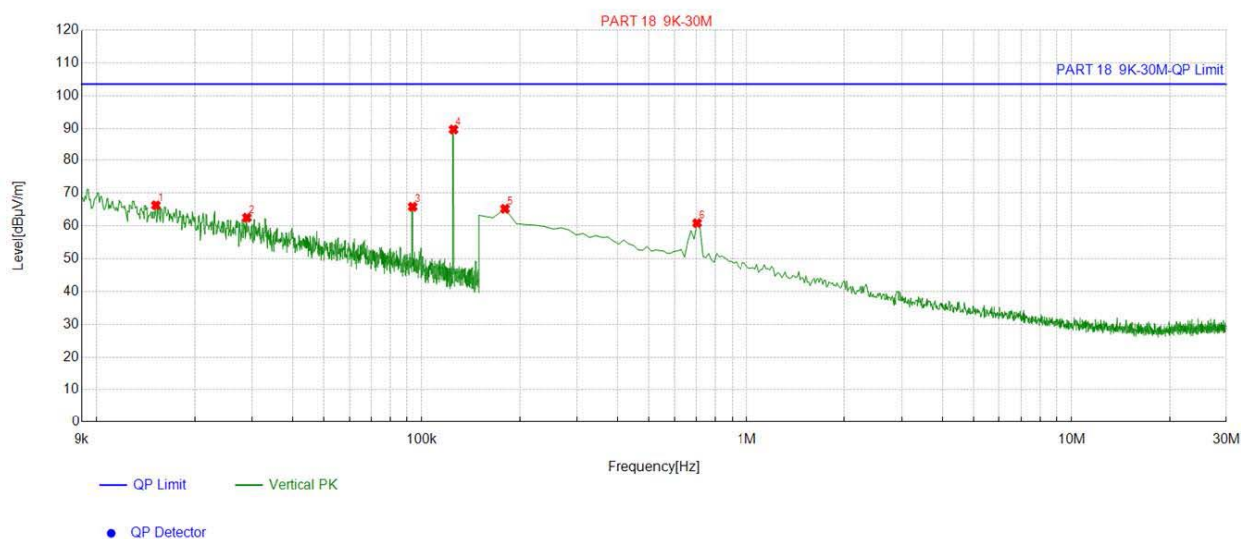**Suspected List**

NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]
1	0.015207	20.32	45.98	66.30	103.50	37.20
2	0.028891	20.38	42.14	62.52	103.50	40.98
3	0.093713	20.67	45.16	65.83	103.50	37.67
4	0.125031	20.40	69.27	89.67	103.50	13.83
5	0.179865	20.42	44.80	65.22	103.50	38.28
6	0.702501	20.25	40.61	60.86	103.50	42.64


Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor;  
Margin = Limit – Level



For 30MHz-1GHz

DC Mode:

Antenna polarity: H

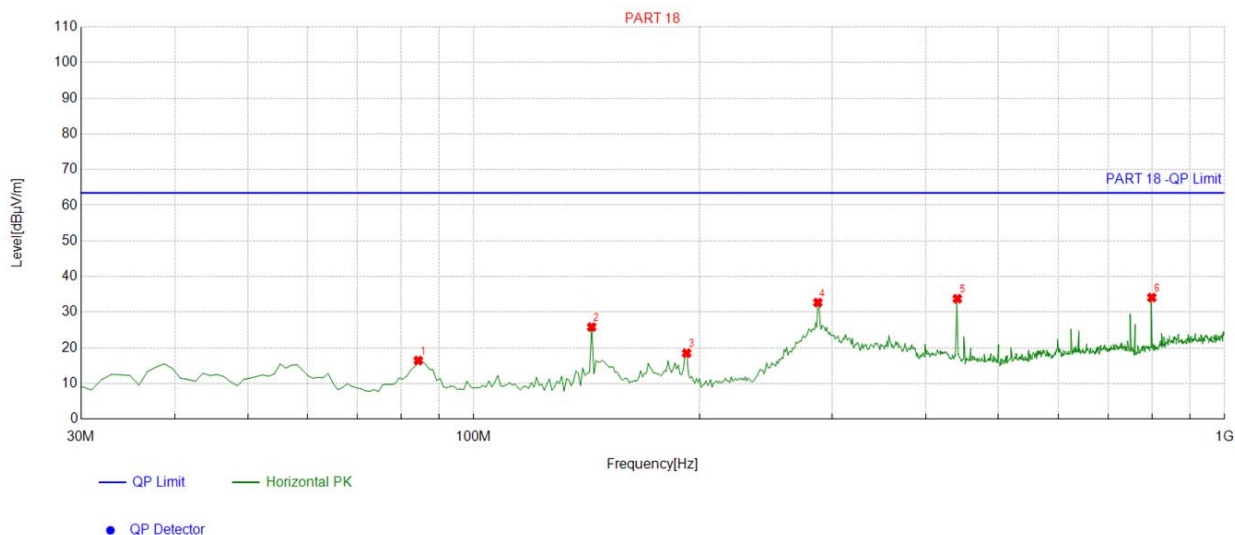


## Suspected List

NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	84.374374	-17.88	34.33	16.45	63.50	47.05	100	174	Horizontal
2	143.60360	-18.35	44.18	25.83	63.50	37.67	100	80	Horizontal
3	192.15215	-15.74	34.26	18.52	63.50	44.98	100	55	Horizontal
4	287.30730	-12.28	44.99	32.71	63.50	30.79	100	234	Horizontal
5	440.72072	-8.67	42.46	33.79	63.50	29.71	100	325	Horizontal
6	799.97998	-3.01	37.12	34.11	63.50	29.39	100	139	Horizontal

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level



Antenna polarity: V

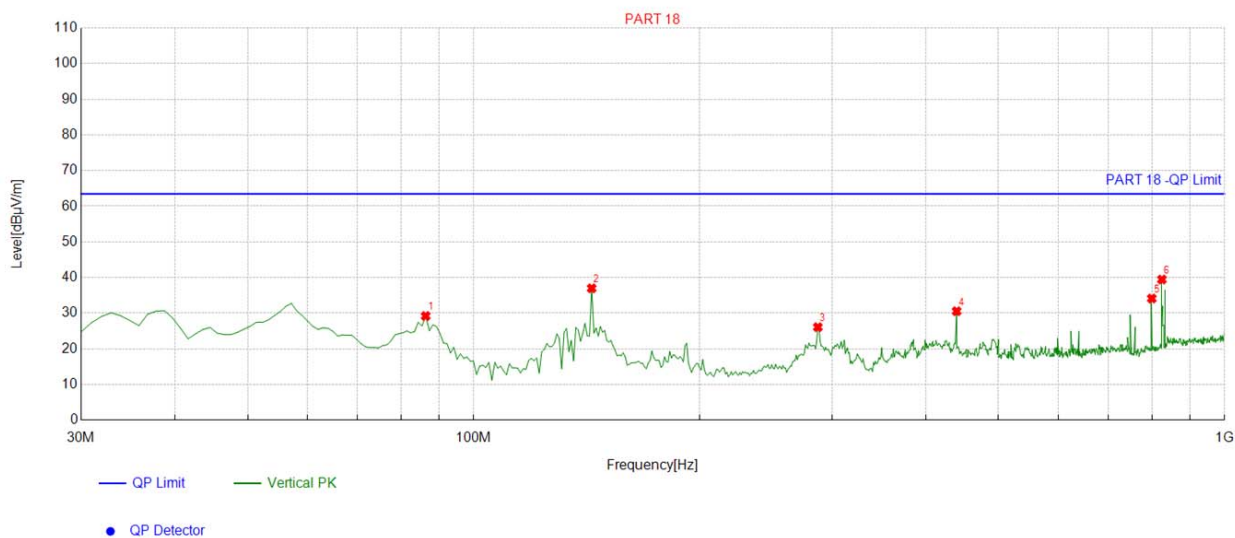


Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	86.316316	-17.62	46.84	29.22	63.50	34.28	100	204	Vertical
2	143.60360	-18.35	55.34	36.99	63.50	26.51	100	62	Vertical
3	287.30730	-12.28	38.37	26.09	63.50	37.41	100	34	Vertical
4	439.74975	-8.70	39.26	30.56	63.50	32.94	100	207	Vertical
5	799.97998	-3.01	37.14	34.13	63.50	29.37	100	79	Vertical
6	825.22522	-2.88	42.34	39.46	63.50	24.04	100	140	Vertical

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level



AC Mode:

Antenna polarity: H

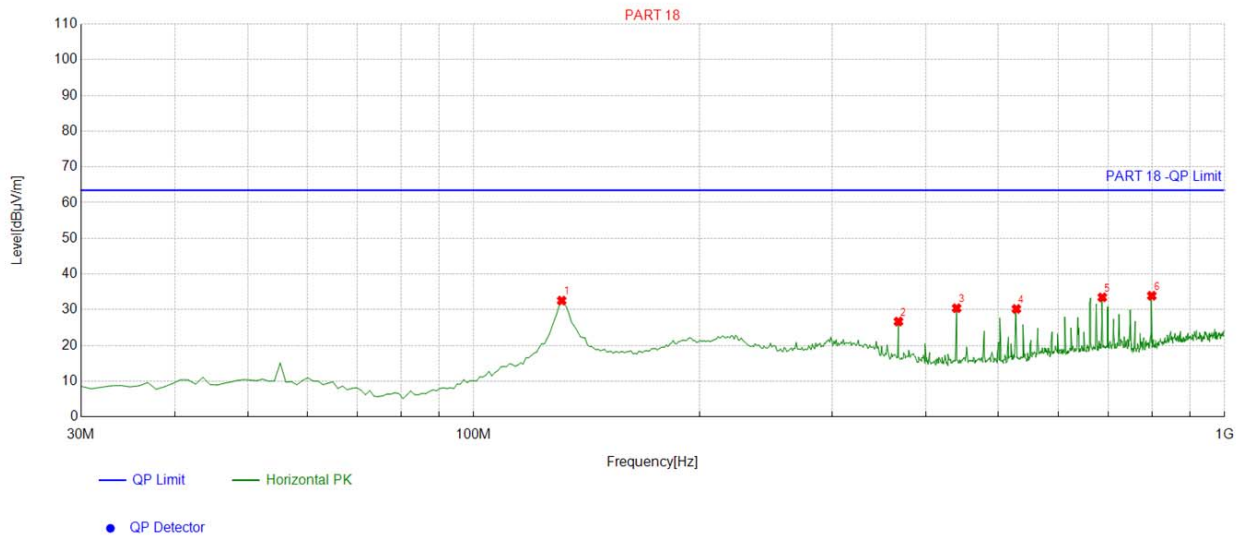


Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	130.98098	-17.44	50.01	32.57	63.50	30.93	100	196	Horizontal
2	367.89789	-9.77	36.48	26.71	63.50	36.79	100	226	Horizontal
3	439.74975	-8.70	39.15	30.45	63.50	33.05	100	56	Horizontal
4	528.10810	-7.15	37.38	30.23	63.50	33.27	100	287	Horizontal
5	687.34734	-4.32	37.80	33.48	63.50	30.02	100	117	Horizontal
6	799.97998	-3.01	36.93	33.92	63.50	29.58	100	222	Horizontal

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level



Antenna polarity: V

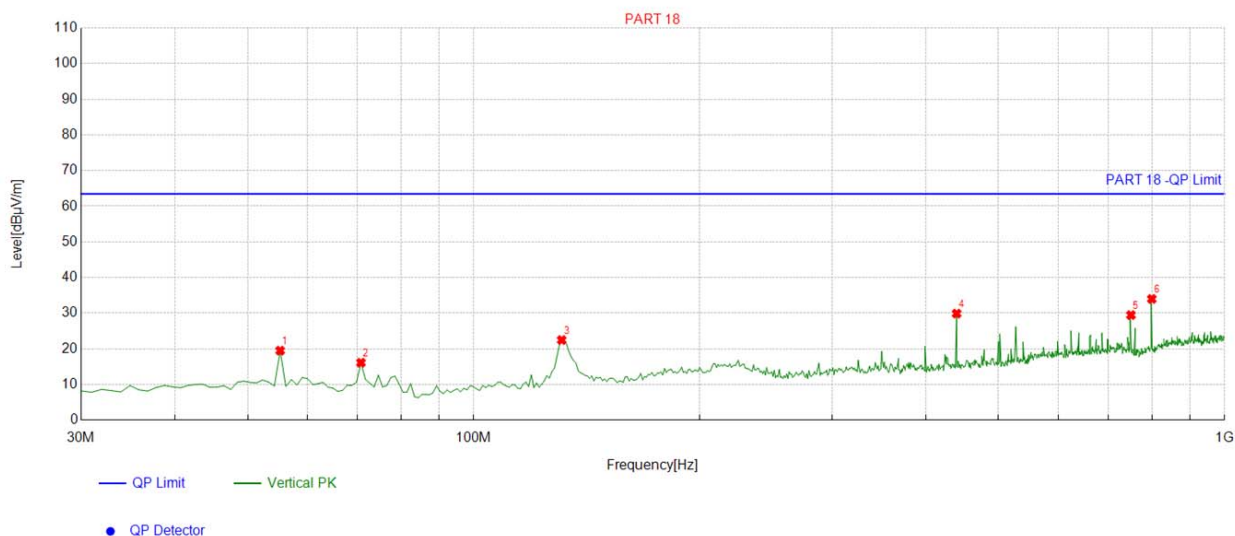

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	55.245245	-14.00	33.51	19.51	63.50	43.99	100	303	Vertical
2	70.780781	-16.89	33.01	16.12	63.50	47.38	100	10	Vertical
3	130.98098	-17.44	39.92	22.48	63.50	41.02	100	108	Vertical
4	439.74975	-8.70	38.60	29.90	63.50	33.60	100	311	Vertical
5	750.46046	-3.85	33.33	29.48	63.50	34.02	100	277	Vertical
6	799.97998	-3.01	37.01	34.00	63.50	29.50	100	105	Vertical

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level



## 5. Antenna Requirement

### Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### Antenna Connected Construction

The antenna used in this product is Coil Antenna, which permanently attached. It conforms to the standard requirements.

### Antenna







## 6. Photographs of Test



### Radiated Emission

AC Mode:

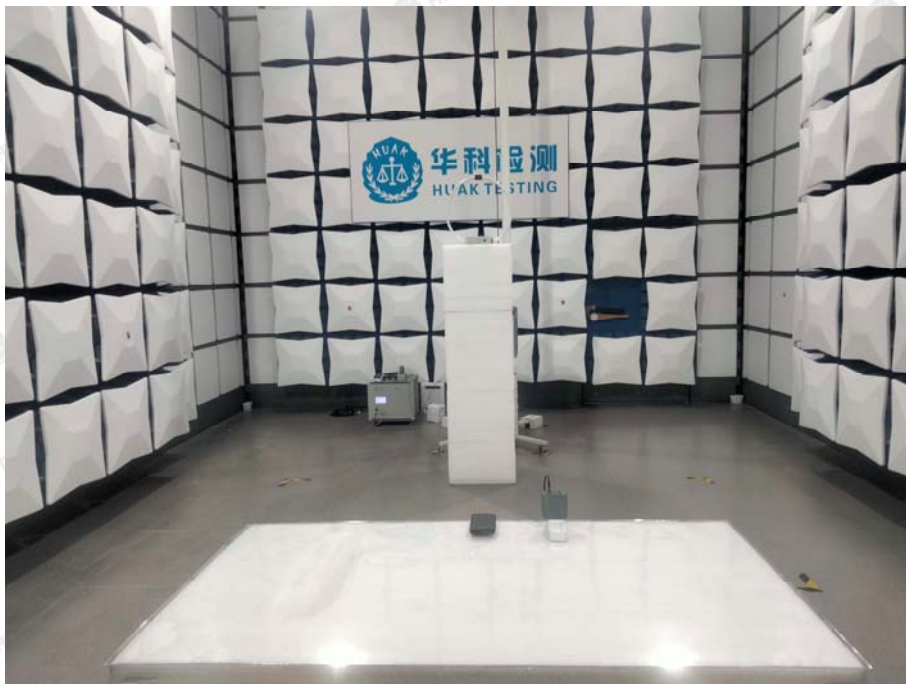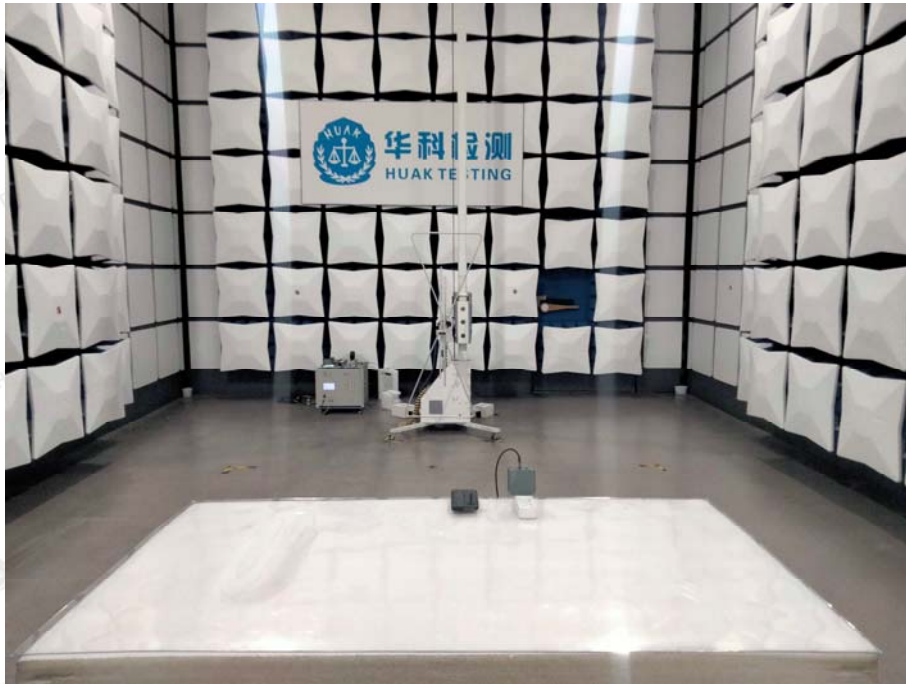



DC Mode:

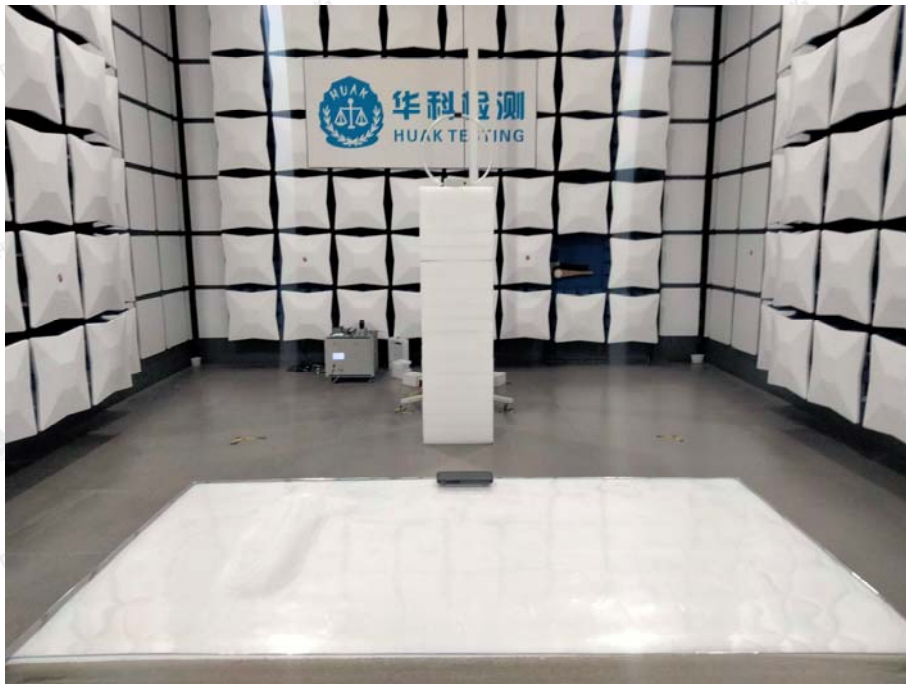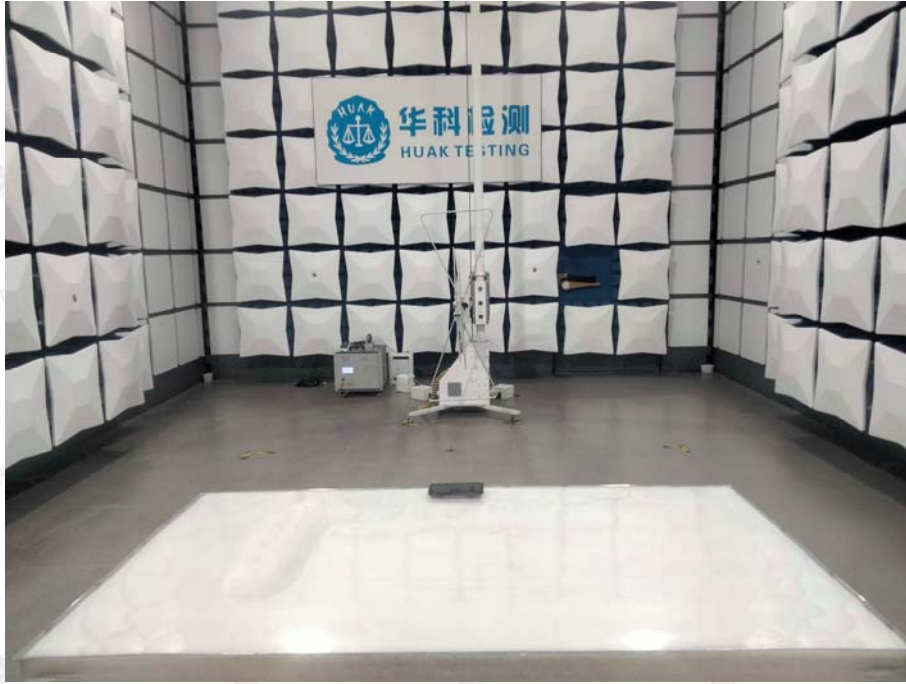

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



## Conducted Emission



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



## 7. Photos of the EUT

Reference to the report: ANNEX A of external photos and ANNEX B of internal photos.

-----End of test report-----