


SPECIFICATION 产品规格书

SKI.WB800D80U.2_D40L B23365 IEEE 802.11 a/b/g/n/ac/ax 1T1R USB Wi-Fi Integrated BLE 5.4

Approved by Shikun		
Checked by 审核	Rechecked by 复审	Approved by 批准
		

Please send the original back to us after you have approved and signed.
客户承认签章后敬请寄回正本一份。

Approved by customer		
Comments 确认意见	Approved by 批准签字	Company's seal 盖章
Customer's Name:		

REVISION HISTORY

VERSION	DATE	BOARD ID	PAGE	DESCRIPTION	AUTHOR
V1.0	2024.08.12	SKI.WB800D80U.2_D40L B23365	ALL	First Issued	CQF
V1.1	2024.09.03	SKI.WB800D80U.2_D40L B23365	ALL	Update Package	CQF
V1.2	2024.12.03	SKI.WB800D80U.2_D40L B23365	ALL	Update Label	CQF
V1.3	2025.01.07	SKI.WB800D80U.2_D40L B23365	ALL	Update Description	CQF

Content

目录

1. Introduction (简介)	2
2. Features (特性)	2
3. Block Diagram (结构框图)	3
4. Package Outline and Mounting (外形及安装尺寸)	3
5. Pin Definition (引脚定义)	4
6. Product Pictures (实物图片)	5
7. Key Materials (关键物料)	5
8. General Requirements (一般要求)	5
9. Electrical Characteristics (电气特性)	5
9.1 IEEE 802.11b Section (2.4GHz)	6
9.2 IEEE 802.11g Section (2.4GHz)	7
9.3 IEEE 802.11n HT20/40 Section(2.4GHz)	8
9.4 IEEE 802.11ax HE20/40 Section (2.4GHz)	9
9.5 IEEE 802.11a Section (5GHz)	11
9.6 IEEE 802.11n HT20/40 Section(5GHz)	12
9.7 IEEE 802.11ac VHT20/40 Section(5GHz)	13
9.8 IEEE 802.11ax HE20/40 Section(5GHz)	14
9.9 BLE Section	16
10. Reference Design (参考设计)	17
10.1 DC Electrical Characteristics (直流电气特性)	17
10.2 Referenceschematic (参考原理图)	18
11. Mechanical,Environmental and Reliability Tests	19
12. Package (包装)	21
13. Production(生产)	22
13.1 Storage requirements(存储要求)	22
13.2 Manufacturing parameter (生产参数)	22

1. Introduction (简介)


SKI.WB800D80U.2_D40L module is based on AIC8800D40L solution. SKI.WB800D80U.2_D40L is a WiFi6/BLE5.4 combo low-power, high-performance and high-integrated dual band wireless communication module which is designed for meeting the customers' needs of small size and low cost. This module supports both WLAN and BLE functions. Its WLAN function supports the USB2.0 interface, and the module meets the requirements of standard protocol IEEE 802.11 a/b/g/n/ac/ax. Its WLAN PHY rate is up to 286.8Mbps@TX. The module can be applied in smart sound boxes, set-top boxes, game machines, printers, IP cameras, tachographs, and other smart equipment. This documentation describes the engineering requirements specification.

SKI.WB800D80U.2_D40L模块基于 AIC8800D40L 方案。SKI.WB800D80U.2_D40L是一款 Wi-Fi6/BLE5.4 组合的低功耗、高性能、高集成度双频无线通信模块，专为满足客户小尺寸、低成本的需求而设计。该模块支持WLAN 和BLE功能。WLAN 功能支持USB2.0 接口，满足 IEEE 802.11 a/b/g/n/ac/ax 标准协议要求。其WLAN理论速率高达286.8Mbps@TX。该模块可应用于智能声盒、机顶盒、游戏机、打印机、IP照相机、测速仪等智能设备中。本文档描述了工程要求规范。

2. Features (特性)


Reserving System 接收制式	IEEE Std. 802.11a
	IEEE Std. 802.11b
	IEEE Std. 802.11g
	IEEE Std. 802.11n
	IEEE Std. 802.11ac
	IEEE Std. 802.11ax
	BLE5.4
Chip Solution 芯片方案	AIC8800D40L
Band 波段	2.4GHz/5G
bandwidth 带宽	20/40MHz
Dimensions 尺寸	13.0mm×12.2mm×3.20mm(Shielding Case)
Antenna 天线	Stamp Hole or Ipex
Installation Mode 安装方式	SMD
Remark 备注	

3. Block Diagram (结构框图)

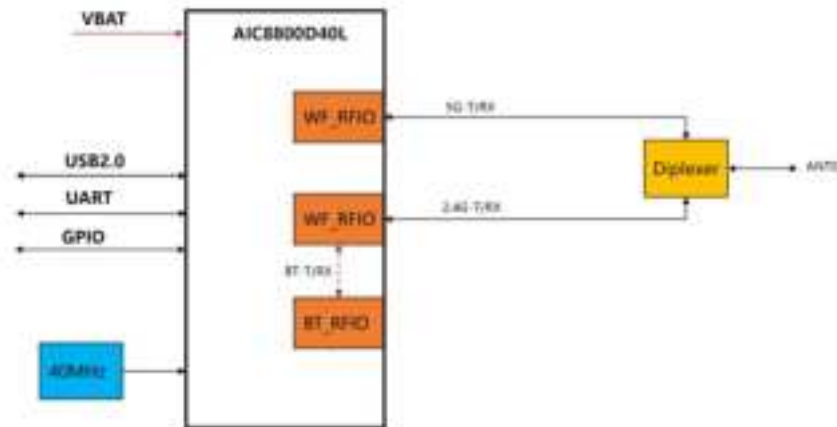

SKI.WB800D80U.2_D40L单天线配置系统框图

4. Package Outline and Mounting (外形及安装尺寸)

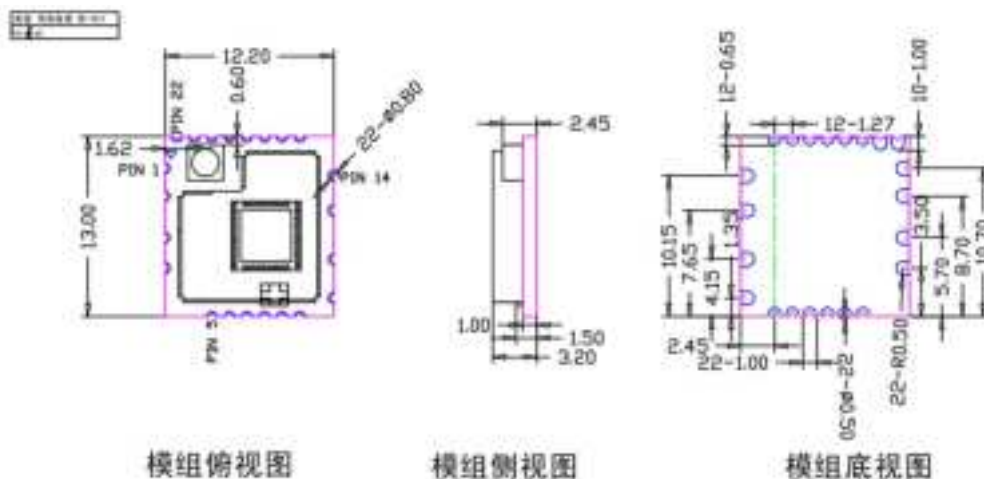

模组俯视图

模组侧视图

模组底视图

- Note: 1. Unit is mm;
 2. The external dimension tolerance of the module is $\pm 0.2\text{mm}$, and the plate thickness and unmarked tolerance are $\pm 0.2\text{mm}$;
 3. Planarity requirements: $<0.12\text{mm}$;
 4. Packaging and production of the upper plate: it is recommended to extend by 1mm outward according to the size of the welding pad;

- 注意: 1、单位为mm;
 2、模组外形尺寸公差为 $\pm 0.2\text{mm}$, 板厚及未标注公差为 $\pm 0.2\text{mm}$;
 3、平面度要求: $<0.12\text{mm}$;
 4、上板封装制作: 建议根据焊盘大小往外延长1mm;

5. Pin Definition (引脚定义)



PIN	SYMBOL	DESCRIPTION
1	GND	Ground
2	WLAN_BT_ANT	WIFI(2.4G+5G)(双天线) WIFI(2.4G+5G)&BT(单天线)
3	BT_ANT	BLE(双天线) NC(单天线)
4	GND	Ground
5	UART1_RTS	UART1_RTS
6	UART1_CTS	UART1_CTS
7	UART1_TX	UART1_TX
8	UART1_RX	UART1_RX
9	HOST_WAKE_BT	HOST_WAKE_BT, High active
10	BT_WAKE_HOST	BT_WAKE_HOST, High active
11	VBAT	Voltage Input of Main Power Supply
12	USB_DM	USB_DM
13	USB_DP	USB_DP
14	GND	Ground
15	NC	Keep Floating
16	NC	Keep Floating
17	NC	Keep Floating
18	PWR_EN	Power Enable/Disable, High active
19	HOST_WAKE_WL	HOST_WAKE_WL, High active
20	WL_WAKE_HOST	WL_WAKE_HOST, High active
21	UART0_TX	UART0_TX
22	UART0_RX	UART0_RX

6. Product Pictures（实物图片）

BOM	Top(正视图)	Bottom(背视图)	Remark(备注)
002. 029. 0001387			Ipex+屏蔽罩 (Shielding Case)

Screening instructions(丝印说明):

- 1.The characters in the red box are the product PCB type number(红色方框内的字符为产品 PCB 型号) ;
- 2.The characters in the yellow box are the product cycle number(黄色方框内的字符为产品周期号);
- 3.Others are non-key characters and do not need to control(其他为非关键字符, 无须管控)。

7. Key Materials

8. General Requirements（一般要求）

No.	Feature	Description
8-1	Operation Voltage 工作电压范围	3.3V±0.3
8-2	Current Consumption 最大电流	1000mA
8-3	Ripple 纹波	<10%
8-4	Operation Temperature 工作温度范围	-10°C to +70°C
8-5	Antenna Type 天线类型	External antenna
8-6	Interface	USB2.0/UART
8-7	Storage Temperature 存储温度	-40°C to +85°C

* Taves: it is defined as the ripple requirements of the main board to the power supply module

*纹波: 定义是主板给模组供电处的纹波要求

9. Electrical Characteristics（电气特性）

除非另有说明, 电气规范试验都在下列条件下进行:

环境条件温度: 25°C±5°C;

电源电压: 模块输入电压 3.3V (±10%);

The Test for electrical specification was performed under the following condition unless otherwise specified.

Ambient condition Temperature :25℃ ± 5℃;

Power supply voltages: 3.3V (±10%) input power at the Module;

*RFPower Configuration Requirements (射频功率配置需求)

txpwr_index_2.4g: [0]:11b+11a/g, [1]:11n/11ac, [2]:11ax

[0] = 18 18 18 18 18 18 18 18 16 16 15 15

[1] = 18 18 18 18 16 16 14 14 13 13

[2] = 18 18 18 18 16 16 15 15 14 14 13 13

txpwr_index_5g: [0]:11a, [1]:11n/11ac, [2]:11ax

[0] = 18 18 18 18 16 16 14 14

[1] = 18 18 18 18 16 16 14 14 13 13

[2] = 18 18 18 18 16 16 14 14 13 13 12 12

* The upper board shall be configured with the userconfig value table according to the above

requirements, so this is the actual power value of the module. If the above value is changed to be relatively increased or reduced by 1 dBm, the regulation requirements: according to the performance requirements of the upper board test.

* 上板需按照上述的要求配置 **userconfig** 值表,这样才是模组的实际的功率值,若改变上面的值一个值相对提高或者降低 **1dBm**, 调控要求:根据上板测试性能要求,可相对调控。

9.1 IEEE 802.11b Section (2.4GHz)

Items	Contents				
Specification	IEEE802.11b				
Mode	CCK				
Channel	CH1 to CH13				
Data rate	1, 2, 5.5, 11Mbps				
TX Characteristics	Min.	Typ.	Max.	Unit	Remark
1. Power Levels at each rate					
18dBm Target (For Each antenna port) @ 11b/1,2,5.5,11Mbps	16	18	20	dBm	
2. Spectrum Mask @ target power					
1) fc ±11MHz to ±22MHz	-	-	-30	dBr	
2) fc > ±22MHz	-	-	-50	dBr	
3. Constellation Error(EVM)@ target power					
1) 1Mbps	-	-	-9.11	dB	
2) 2Mbps	-	-	-9.11	dB	
3) 5.5Mbps	-	-	-9.11	dB	
4) 11Mbps	-	-	-9.11	dB	
4. Frequency Error	-20	-	20	ppm	
RX Characteristics	Min.	Typ.	Max.	Unit	
5. Minimum Input Level Sensitivity					
1) 1Mbps (FER ≤8%)	-	-95	-83	dBm	
2) 2Mbps (FER ≤8%)	-	-	-80	dBm	
3) 5.5Mbps (FER ≤8%)	-	-	-79	dBm	
4) 11Mbps (FER ≤8%)	-	-87	-76	dBm	
6. Maximum Input Level (FER ≤8%)	-10	-	-	dBm	

9.2 IEEE 802.11g Section (2.4GHz)

Items	Contents				
Specification	IEEE802.11g				
Mode	OFDM				
Channel	CH1 to CH13				
Data rate	6, 9, 12, 18, 24, 36, 48, 54Mbps				
TX Characteristics	Min.	Typ.	Max.	Unit	Remark
1. Power Levels					
18dBm Target (For Each antenna port) @ 11g/6, 9, 12, 18Mbps	16	18	20	dBm	
16dBm Target (For Each antenna port) @ 11g/24,36Mbps	14	16	18	dBm	
15dBm Target (For Each antenna port) @ 11g/48, 54Mbps	13	15	17	dBm	
2. Spectrum Mask @ target power					
1) at fc +/-11MHz	-	-	-20	dBr	
2) at fc +/-20MHz	-	-	-28	dBr	
3) at fc > +/-30MHz	-	-	-40	dBr	
3 Constellation Error(EVM)@ target power					
1) 6Mbps	-	-	-5	dB	
2) 9Mbps	-	-	-8	dB	
3) 12Mbps	-	-	-10	dB	
4) 18Mbps	-	-	-13	dB	
5) 24Mbps	-	-	-16	dB	
6) 36Mbps	-	-	-19	dB	
7) 48Mbps	-	-	-22	dB	
8) 54Mbps	-	-	-25	dB	
4 Frequency Error	-20	-	20	ppm	
RX Characteristics	Min.	Typ.	Max.	Unit	
5 Minimum Input Level Sensitivity					
1) 6Mbps (PER ≤10%)	-	-90	-85	dBm	
2) 9Mbps (PER ≤10%)	-	-	-84	dBm	
3) 12Mbps (PER ≤10%)	-	-	-82	dBm	
4) 18Mbps (PER ≤10%)	-	-	-80	dBm	
5) 24Mbps (PER ≤10%)	-	-	-77	dBm	
6) 36Mbps (PER ≤10%)	-	-	-73	dBm	
7) 48Mbps (PER ≤10%)	-	-	-69	dBm	
8) 54Mbps (PER ≤10%)	-	-74	-65	dBm	

9.3 IEEE 802.11n HT20/40 Section(2.4GHz)

Items	Contents				
Specification	IEEE802.11n HT20/40@2.4GHz				
Mode	OFDM				
Channel	HT20:CH1 to CH13 HT40:CH3 to CH11				
Data rate (MCS index)	MCS0/1/2/3/4/5/6/7				
TX Characteristics	Min.	Typ.	Max.	Unit	Remark
1. Power Levels (Calibrated)					
18dBm Target (For Each antenna port) @ 11n/MCS0,1,2,3	16	18	20	dBm	
16dBm Target (For Each antenna port) @ 11n/MCS4,5	14	16	18	dBm	
14dBm Target (For Each antenna port) @ 11n/MCS6,7	12	14	16	dBm	
2. Spectrum Mask @target power					
1) at fc +/-22MHz	-	-	-20	dBr	
2) at fc +/-40MHz	-	-	-28	dBr	
3) at fc > +/-60MHz	-	-	-45	dBr	
3. Constellation Error(EVM)@ target power					
1) MCS0	-	-	-5	dB	
2) MCS1	-	-	-10	dB	
3) MCS2	-	-	-13	dB	
4) MCS3	-	-	-16	dB	
5) MCS4	-	-	-19	dB	
6) MCS5	-	-	-22	dB	
7) MCS6	-	-	-25	dB	
8) MCS7	-	-	-28	dB	
4. Frequency Error	-20	-	20	ppm	
RX Characteristics	Min.	Typ.	Max.	Unit	
5. Minimum Input Level Sensitivity			HT20	HT40	
1) MCS0 (PER ≤10%)	-	-87	-82	-79	dBm
2) MCS1 (PER ≤10%)	-	-	-79	-76	dBm
3) MCS2 (PER ≤10%)	-	-	-77	-74	dBm
4) MCS3 (PER ≤10%)	-	-	-74	-71	dBm
5) MCS4 (PER ≤10%)	-	-	-70	-67	dBm
6) MCS5 (PER ≤10%)	-	-	-66	-63	dBm
7) MCS6 (PER ≤10%)	-	-	-65	-62	dBm
8) MCS7 (PER ≤10%)	-	-70	-64	-61	dBm
6. Maximum Input Level (PER ≤10%)	-20	-	-	dBm	

9.4 IEEE 802.11ax HE20/40 Section (2.4GHz)

Items	Contents				
Specification	IEEE802.11ax HE20/40@2.4GHz				
Mode	OFDMA				
Channel	HE20:CH1 to CH13 HE40:CH3 to CH11				
Data rate (MCS index)	MCS0/1/2/3/4/5/6/7/8/9/10/11				
TX Characteristics	Min.	Typ.	Max.	Unit	Remark
1. Power Levels (Calibrated)					
18dBm Target (For Each antenna port) @ 11ax/MCS0,1,2,3	16	18	20	dBm	
16dBm Target (For Each antenna port) @ 11ax/MCS4,5	14	16	18	dBm	
15dBm Target (For Each antenna port) @ 11ax/MCS6,7	13	15	17	dBm	
14dBm Target (For Each antenna port) @ 11ax/MCS8,9	12	14	16	dBm	
13dBm Target (For Each antenna port) @ 11ax/MCS10,11	11	13	15	dBm	
2. Spectrum Mask @target power					
1) at fc +/-11MHz/21MHz/41MHz	-	-	-20	dBr	
2) at fc +/-20MHz/40MHz/80MHz	-	-	-28	dBr	
3) at fc +/-30MHz/60MHz/120MHz	-	-	-40	dBr	
3. Constellation Error(EVM)@ target power					
1) MCS0	-	-	-5	dB	
2) MCS1	-	-	-10	dB	
3) MCS2	-	-	-13	dB	
4) MCS3	-	-	-16	dB	
5) MCS4	-	-	-19	dB	
6) MCS5	-	-	-22	dB	
7) MCS6	-	-	-25	dB	
8) MCS7	-	-	-27	dB	
9) MCS8	-	-	-30	dB	
10) MCS9	-	-	-32	dB	
11) MCS10	-	-	-34	dB	
12) MCS11	-	-	-35	dB	
4. Frequency Error	-20	-	20	ppm	
RX Characteristics	Min.	Typ.	Max.	Unit	
5.Minimum Input Level Sensitivity			HE20	HE40	
1) MCS0 (PER ≤10%)	-	-87	-82	-79	dBm
2) MCS1 (PER ≤10%)	-	-	-79	-76	dBm
3) MCS2 (PER ≤10%)	-	-	-77	-74	dBm
4) MCS3 (PER ≤10%)	-	-	-74	-71	dBm
5) MCS4 (PER ≤10%)	-	-	-70	-67	dBm

6) MCS5 (PER $\leq 10\%$)	-	-	-66	-63	dBm	
7) MCS6 (PER $\leq 10\%$)	-	-	-65	-62	dBm	
8) MCS7 (PER $\leq 10\%$)	-	-	-64	-61	dBm	
9) MCS8 (PER $\leq 10\%$)	-	-	-59	-56	dBm	
10) MCS9 (PER $\leq 10\%$)	-	-	-57	-54	dBm	
11) MCS10 (PER $\leq 10\%$)	-	-	-54	-51	dBm	
12) MCS11 (PER $\leq 10\%$)	-	-59	-51	-49	dBm	
6. Maximum Input Level (PER $\leq 10\%$)	-30	-	-		dBm	

9.5 IEEE 802.11a Section (5GHz)

Items	Contents				
Specification	IEEE802.11a				
Mode	OFDM				
Channel	CH36 to CH165				
Data rate (MCS index)	6, 9, 12, 18, 24, 36, 48, 54Mbps				
TX Characteristics	Min.	Typ.	Max.	Unit	Remark
1. Power Levels (Calibrated)					
18dBm Target (For Each antenna port) @ 11a/6, 9, 12, 18Mbps	16	18	20	dBm	
16dBm Target (For Each antenna port) @ 11a/24,36Mbps	14	16	18	dBm	
14dBm Target (For Each antenna port) @ 11a/48, 54Mbps	12	14	16	dBm	
2. Spectrum Mask @target power					
1) at fc +/-11MHz/21MHz/41MHz	-	-	-20	dBr	
2) at fc +/-20MHz/40MHz/80MHz	-	-	-28	dBr	
3) at fc +/-30MHz/60MHz/120MHz	-	-	-40	dBr	
3. Constellation Error(EVM)@ target power					
1) 6Mbps	-	-	-5	dB	
2) 9Mbps	-	-	-8	dB	
3) 12Mbps	-	-	-10	dB	
4) 18Mbps	-	-	-13	dB	
5) 24Mbps	-	-	-16	dB	
6) 36Mbps	-	-	-19	dB	
7) 48Mbps	-	-	-22	dB	
8) 54Mbps	-	-	-25	dB	
4. Frequency Error	-20	-	20	ppm	
RX Characteristics	Min.	Typ.	Max.	Unit	
5.Minimum Input Level Sensitivity					
1) 6Mbps (PER ≤10%)	-	-90	-82	dBm	
2) 9Mbps (PER ≤10%)	-	-	-81	dBm	
3) 12Mbps (PER ≤10%)	-	-	-79	dBm	
4) 18Mbps (PER ≤10%)	-	-	-77	dBm	
5) 24Mbps (PER ≤10%)	-	-	-74	dBm	
6) 36Mbps (PER ≤10%)	-	-	-70	dBm	
7) 48Mbps (PER ≤10%)	-	-	-66	dBm	
8) 54Mbps (PER ≤10%)	-	-74	-65	dBm	
6. Maximum Input Level (PER ≤10%)	-30	-	-	dBm	

9.6 IEEE 802.11n HT20/40 Section(5GHz)

Items	Contents				
Specification	IEEE802.11n HT20/40@5GHz				
Mode	OFDM				
Channel	HT20:CH36 to CH165 HT40:CH38 to CH163				
Data rate (MCS index)	MCS0/1/2/3/4/5/6/7				
TX Characteristics	Min.	Typ.	Max.	Unit	Remark
1. Power Levels (Calibrated)					
18dBm Target (For Each antenna port) @ 11n/MCS0,1,2,3	16	18	20	dBm	
16dBm Target (For Each antenna port) @ 11n/MCS4,5	14	16	18	dBm	
14dBm Target (For Each antenna port) @ 11n/MCS6,7	12	14	16	dBm	
2. Spectrum Mask @target power					
1) at fc +/-11MHz	-	-	-20	dBr	
2) at fc +/-20MHz	-	-	-28	dBr	
3) at fc > +/-30MHz	-	-	-45	dBr	
3. Constellation Error(EVM)@ target power					
1) MCS0	-	-	-5	dB	
2) MCS1	-	-	-10	dB	
3) MCS2	-	-	-13	dB	
4) MCS3	-	-	-16	dB	
5) MCS4	-	-	-19	dB	
6) MCS5	-	-	-22	dB	
7) MCS6	-	-	-25	dB	
8) MCS7	-	-	-28	dB	
4. Frequency Error	-20	-	20	ppm	
RX Characteristics	Min.	Typ.	Max.	Unit	
6. Minimum Input Level Sensitivity (each chain)			HT20	HT40	
1) MCS0 (PER ≤10%)	-	-87	-82	-79	dBm
2) MCS1 (PER ≤10%)	-	-	-79	-76	dBm
3) MCS2 (PER ≤10%)	-	-	-77	-74	dBm
4) MCS3 (PER ≤10%)	-	-	-74	-71	dBm
5) MCS4 (PER ≤10%)	-	-	-70	-67	dBm
6) MCS5 (PER ≤10%)	-	-	-66	-63	dBm
7) MCS6 (PER ≤10%)	-	-	-65	-62	dBm
8) MCS7 (PER ≤10%)	-	-68	-64	-61	dBm
6. Maximum Input Level (PER ≤10%)	-30	-	-	-	dBm

9.7 IEEE 802.11ac VHT20/40 Section(5GHz)

Items	Contents				
Specification	IEEE802.11ac VHT20/40@5GHz				
Mode	OFDM				
Channel	VHT20:CH36 to CH165 VHT40:CH38 to CH163				
Data rate (MCS index)	MCS0/1/2/3/4/5/6/7/8/9				
TX Characteristics	Min.	Typ.	Max.	Unit	Remark
1. Power Levels (Calibrated)					
18dBm Target (For Each antenna port) @ 11ac/MCS0,1,2,3	16	18	20	dBm	
16dBm Target (For Each antenna port) @ 11ac/MCS4,5	14	16	18	dBm	
14dBm Target (For Each antenna port) @ 11ac/MCS6,7	12	14	16	dBm	
13dBm Target (For Each antenna port) @ 11ac/MCS8,9	11	13	15	dBm	
2. Spectrum Mask @target power					
1) at fc +/-11MHz/21MHz/41MHz	-	-	-20	dBr	
2) at fc +/-20MHz/40MHz/80MHz	-	-	-28	dBr	
3) at fc +/-30MHz/60MHz/120MHz	-	-	-40	dBr	
3. Constellation Error(EVM)@ target power					
1) MCS0	-	-	-5	dB	
2) MCS1	-	-	-10	dB	
3) MCS2	-	-	-13	dB	
4) MCS3	-	-	-16	dB	
5) MCS4	-	-	-19	dB	
6) MCS5	-	-	-22	dB	
7) MCS6	-	-	-25	dB	
8) MCS7	-	-	-27	dB	
9) MCS8	-	-	-30	dB	
10) MCS9	-	-	-32	dB	
4. Frequency Error	-20	-	20	ppm	
RX Characteristics	Min.	Typ.	Max.	Unit	
5.Minimum Input Level Sensitivity (each chain)			VHT 20	VHT 40	
1) MCS0 (PER ≤10%)	-	-87	-82	-79	dBm
2) MCS1 (PER ≤10%)	-	-	-79	-76	dBm
3) MCS2 (PER ≤10%)	-	-	-77	-74	dBm
4) MCS3 (PER ≤10%)	-	-	-74	-71	dBm
5) MCS4 (PER ≤10%)	-	-	-70	-67	dBm
6) MCS5 (PER ≤10%)	-	-	-66	-63	dBm
7) MCS6 (PER ≤10%)	-	-	-65	-62	dBm
8) MCS7 (PER ≤10%)	-	-	-64	-61	dBm

9) MCS8(PER $\leq 10\%$)	-	-	-59	-56	dBm	
10) MCS9(PER $\leq 10\%$)	-	-61	-57	-54	dBm	
6. Maximum Input Level (PER $\leq 10\%$)	-30	-	-	-	dBm	

9.8 IEEE 802.11ax HE20/40 Section(5GHz)

Items	Contents					
Specification	IEEE802.11ax HE20/40@5GHz					
Mode	OFDMA					
Channel	HE20:CH36 to CH165 HE40:CH38 to CH163					
Data rate (MCS index)	MCS0/1/2/3/4/5/6/7/8/9/10/11					
TX Characteristics	Min.	Typ.	Max.	Unit	Remark	
1. Power Levels (Calibrated)						
18dBm Target (For Each antenna port) @ 11ax/MCS0,1,2,3	16	18	20	dBm		
16dBm Target (For Each antenna port) @ 11ax/MCS4,5	14	16	18	dBm		
14dBm Target (For Each antenna port) @ 11ax/MCS6,7	12	14	16	dBm		
13dBm Target (For Each antenna port) @ 11ax/MCS8,9	11	13	15	dBm		
12dBm Target (For Each antenna port) @ 11ax/MCS10,11	10	12	14	dBm		
2. Spectrum Mask @target power						
1) at fc +/-11MHz/21MHz/41MHz	-	-	-20	dBr		
2) at fc +/-20MHz/40MHz/80MHz	-	-	-28	dBr		
3) at fc +/-30MHz/60MHz/120MHz	-	-	-40	dBr		
3. Constellation Error(EVM)@ target power						
1) MCS0	-	-	-5	dB		
2) MCS1	-	-	-10	dB		
3) MCS2	-	-	-13	dB		
4) MCS3	-	-	-16	dB		
5) MCS4	-	-	-19	dB		
6) MCS5	-	-	-22	dB		
7) MCS6	-	-	-25	dB		
8) MCS7	-	-	-27	dB		
9) MCS8	-	-	-30	dB		
10) MCS9	-	-	-32	dB		
11) MCS10	-	-	-34	dB		
12) MCS11	-	-	-35	dB		
4. Frequency Error	-20	-	20	ppm		
RX Characteristics	Min.	Typ.	Max.	Unit		
5.Minimum Input Level Sensitivity			HE 20	HE 40		

1) MCS0 (PER $\leq 10\%$)	-	-87	-82	-79	dBm	
2) MCS1 (PER $\leq 10\%$)	-	-	-79	-76	dBm	
3) MCS2 (PER $\leq 10\%$)	-	-	-77	-74	dBm	
4) MCS3 (PER $\leq 10\%$)	-	-	-74	-71	dBm	
5) MCS4 (PER $\leq 10\%$)	-	-	-70	-67	dBm	
6) MCS5 (PER $\leq 10\%$)	-	-	-66	-63	dBm	
7) MCS6 (PER $\leq 10\%$)	-	-	-65	-62	dBm	
8) MCS7 (PER $\leq 10\%$)	-	-	-64	-61	dBm	
9) MCS8 (PER $\leq 10\%$)	-	-	-59	-56	dBm	
10) MCS9 (PER $\leq 10\%$)	-	-	-57	-54	dBm	
11) MCS10 (PER $\leq 10\%$)	-	-	-54	-51	dBm	
12) MCS11 (PER $\leq 10\%$)	-	-59	-51	-49	dBm	
6. Maximum Input Level (PER $\leq 10\%$)	-30	-	-	-	dBm	

9.9 BLE Section


Items	Contents				
Specification	BLE				
Number of Channel	0~39 Channels				
Frequency Band	2.402 GHz ~2.480GHz				
	Min.	Typ.	Max.	Unit	Remark
1. Output Power	-	7	-	dBm	
2. Gain step	-	1.0	-	dB	
3. Receiver sensitivity (BER $\leq$ 0.1%)					
3). Bluetooth LE receiver specifications (PER $\leq$ 30.8%)	-	-95	-80		
4. Maximum usable signal (BER $\leq$ 0.1%)	-	-5	-		
5. C/I co-channel (BER<0.1%)	-	4	11	dB	
6. C/I 1MHz (BER<0.1%)	-	-14	0	dB	
7. C/I 2MHz (BER<0.1%)	-	-42	-30	dB	
8. C/I $\geq$ 3MHz (BER<0.1%)	-	-49	-40	dB	
9. C/I Image channel (BER<0.1%)	-	-25	-9	dB	
10. C/I Image 1MHz (BER<0.1%)	-	-50	-20	dB	
11. Inter-modulation	-	-13	-	dB	
12. Out-of-band blocking					
1). 30MHz to 2000MHz	-10	-	-	dBm	
2). 2000MHz to 2399MHz	-27	-	-	dBm	
3). 2498MHz to 3000MHz	-27	-	-	dBm	
4). 3000MHz to 12.75GHz	-10	-	-	dBm	
13. Modulation characteristics					
1). Δf_{1avg}				KHz	
2). Δf_{2max} (For at least 99.9% of all Δf_{2max})	-	-	-	KHz	
3). $\Delta f_{1avg} / \Delta f_{2avg}$	-	-	-	KHz	
14. ICFT	-	-	-	KHz	
15. Carrier frequency drift					
1). One slot packet (DH1)	-25	± 15	+25	KHz	
2). Two slot packet (DH3)	-40	± 15	+40	KHz	
3). Five slot packet (DH5)	-40	± 15	+40	KHz	
4). Max drift rate	-	6	20	KHz/50us	
16. TX output spectrum(20dB bandwidth)	-	922	1000	KHz	
17. In-Band spurious emission					
1). ± 2 MHz offset	-	-45	-20	dBm	
2). ± 3 MHz offset	-	-48	-40	dBm	
3). $> \pm 3$ MHz offset	-	-48	-40	dBm	

10. Reference Design (参考设计)

10.1 DC Electrical Characteristics (直流电气特性)

Symbol	Description	conditions	Min.	Typ.	Max.	Unit
VDD33	Power supplies	-	3.0	3.3	3.6	V
VDDIO	I/O input power supplies	-	3.0	3.3	3.6	V
IvDD33	Power supply current	-	-	-	800	mA
IvDDIO	I/O supply current	-	-	-	50	mA
Vih	High-level input voltage	VDDIO=3.3V	$VDDIO \times 0.625$	-	$VDDIO + 0.3$	V
Vil	Low-level input voltage	VDDIO=3.3V	-0.3	-	$VDDIO \times 0.25$	V
Voh	High-level output voltage	VDDIO=3.3V	$VDDIO - 0.4$	-	$VDDIO + 0.3$	V
Vol	Low-level output voltage	VDDIO=3.3V	-0.3	-	0.4	V
Rpu	Internal pull-up resistor	VDDIO=3.3V	40	75	190	kΩ
Rpd	Internal pull-down resistor	VDDIO=3.3V	40	75	190	kΩ

10.2 Reference schematic (参考原理图)

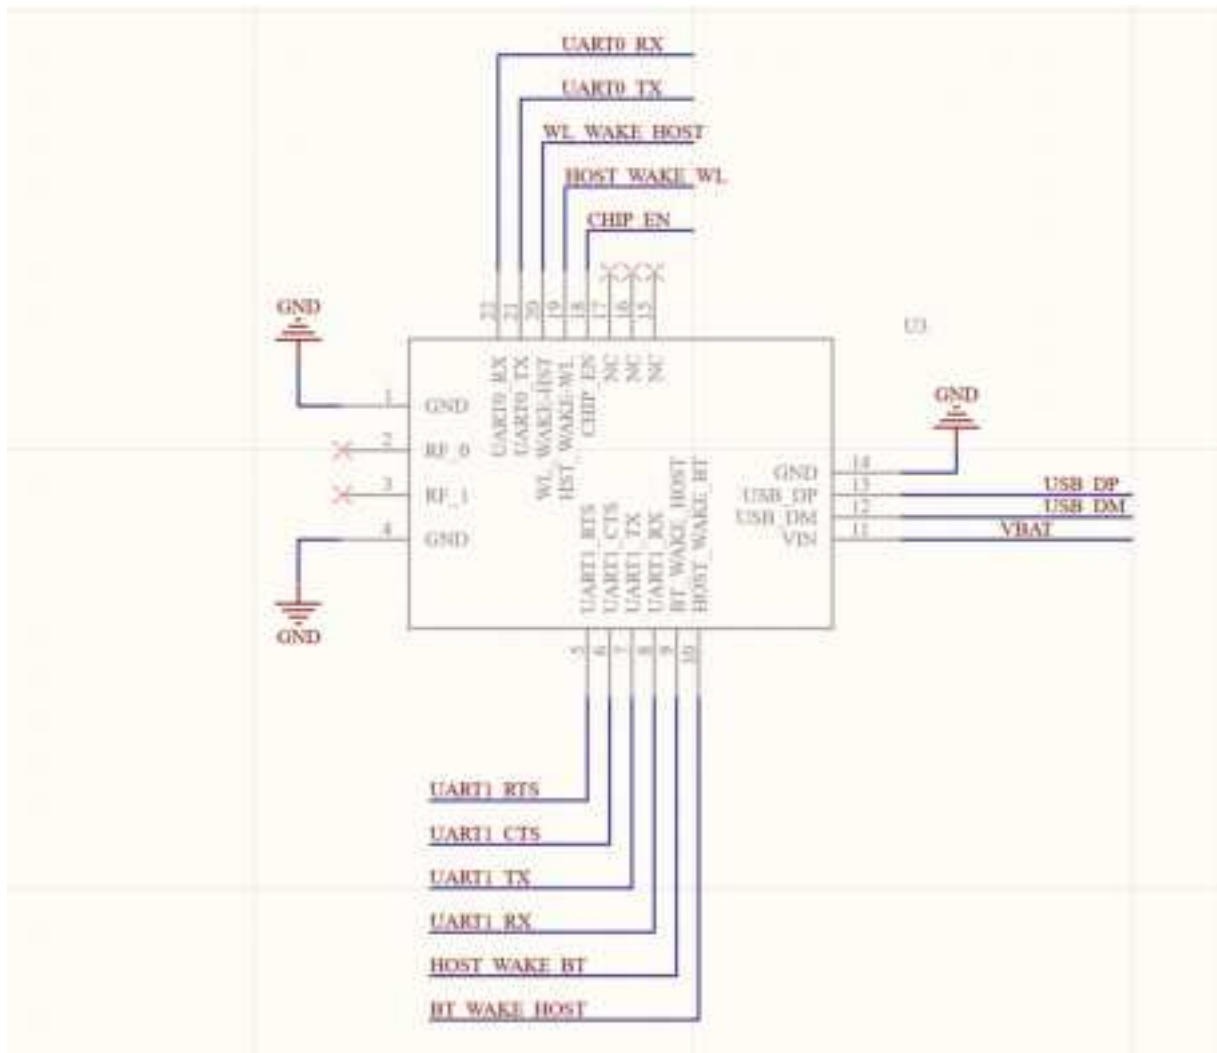

Matters need attention:

1. The GND PIN pin near RF_0/RF_1 shall be well grounded (direct copper paving is recommended).
2. The VBAT network places power filter capacitances near the module end.

注意事项:

1. 靠近RF_0/RF_1 的GND PIN引脚需保证良好接地（建议用直接铺地的方式铺铜）。
2. VBAT网络在靠近模组端放置电源滤波电容。

11. Mechanical, Environmental and Reliability Tests

Test Items		Test Conditions	Qty	Criteria Condition
11-1	Drop test	The packed samples within 100Kg can be tested Drop height: Face Side: 800/600/450mm Edge line: 600/450/350mm Drop time: 1 each Face and edge.	1xBox	After drop test, the outer box and inner box will not be broken by appearance visual inspection.
11-2	Vibration test	X-Y-Z direction, first Frequency changing from 10Hz to 30Hz to 10Hz, amplitude 0.75mm, 5 times vibrations, then frequency Changing from 30Hz to 55 Hz to 30 Hz, amplitude 0.15mm, 5 time vibration.	3	After test, the Appearance, Power EVM and Frequency error shall be satisfied with the specification.
11-3	Impact test	Impact acceleration: 50m/sec ² ; Impact duration: 16ms; Impact times: 1000.	3	After test, the Appearance, Power EVM and Frequency error shall be satisfied with the specification.
11-4	Soldering ability test	Soldering temperature: 235±5℃ Soldering duration: 2±0.5S	3	1. After soldering, the soldered area must be covered by a smooth bright solder layer, some deficiencies such as a small amount of the pinhole, not wetting are allowed, but the deficiencies can not be in the same place; 2. At least 90% of soldered area shall be covered continuously by the soldering material.
11-5	Humidity test	Leave samples in 40±3℃, 93% RH @ 96 hours	3	Leave samples in standard test condition for 2 hours then test, the Appearance, Power, EVM and Frequency error functional parameter shall be satisfied with the test specification.

11-6	High temperature load life test	Thermostat cabinet temperature: $55\pm 5^{\circ}\text{C}$ Applied voltage: 110% rated voltage Working duration: 200 hour (Supply Voltage Cycle 23h power on, 1h power off)	60	After test, leave samples in standard condition for 1 hour and test, Power, EVM and Frequency error shall be satisfied with the test specification.
11-7	High temperature load test	Temperature: $55\pm 5^{\circ}\text{C}$ Samples work for 16 hours	3	After test, the Appearance, Power, EVM and Frequency error shall be Satisfied with the test specification.
11-8	Low temperature storage test	Leave the samples in $-25\pm 3^{\circ}\text{C}$ @24 hours	3	Leave samples in standard test condition for 2 hours then test, the Appearance, Power, EVM and Frequency error shall be satisfied with the test specification.
11-9	Low temperature load test	Leave samples in $-15\pm 3^{\circ}\text{C}$ @ 2 hours, samples' function shall be normal, the let samples work for 1 hour	3	After test, leave the samples in standard condition and tested the Appearance, Power, EVM and Frequency error shall be satisfied with the test specification.
11-10	Temperature circle test	One cycle duration $-10\pm 3^{\circ}\text{C}$ @3H $40\pm 3^{\circ}\text{C}$ @3H Total cycle: 10x	3	After test, leave the samples in standard condition and tested Power EVM and Frequency error shall be qualified and all the characters shall be satisfied with the test specification.
11-11	Continuous TP test	Twice cycle duration $-10\pm 3^{\circ}\text{C}$ @4H $+60\pm 3^{\circ}\text{C}$ @4H, $+25^{\circ}\text{C}$ @2H@2H	3	During test, There will not been appeared signal disconnection or interruption between DUT and AP.
11-12	ESD	Discharge voltage: 1kV C: 150pF Discharge resistance: 330Ω Positive 10 times 1 time for each second	3	The products can recoverable smoothly after ESD test.

FCC WARNING

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter.

15.105 Information to the user.

(b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20 cm between the radiator and your body.

Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

The availability of some specific channels and/or operational frequency bands are country dependent and are firmware programmed at the factory to match the intended destination.

The firmware setting is not accessible by the end user.

The final end product must be labelled in a visible area with the following:

“Contains Transmitter Module FCC ID:2AYHE-2404B”

Requirement per KDB996369 D03

2.2 List of applicable FCC rules

List the FCC rules that are applicable to the modular transmitter. These are the rules that specifically establish the bands of operation, the power, spurious emissions, and operating fundamental frequencies. DO NOT list compliance to unintentional-radiator rules (Part 15 Subpart B) since that is not a condition of a module grant that is extended to a host manufacturer. See also Section 2.10 below concerning the need to notify host manufacturers that further testing is required.³

Explanation: This module meets the requirements of FCC part 15C(15.247).FCC Part 15.407

2.3 Summarize the specific operational use conditions

Describe use conditions that are applicable to the modular transmitter, including for example any limits on antennas, etc. For example, if point-to-point antennas are used that require reduction in power or compensation for cable loss, then this information must be in the instructions. If the use condition limitations extend to professional users, then instructions must state that this information also extends to the host manufacturer's instruction manual. In addition, certain information may also be needed, such as peak gain per frequency band and minimum gain.

Explanation: EUT has only one FPC antenna, yes, the module contains a permanent attached antenna with antenna gain of 2.4G: 2.6dBi, 5G antenna 4.2dBi, and the condition of use of the prototype is mobile.

2.4 Limited module procedures

If a modular transmitter is approved as a "limited module," then the module manufacturer is responsible for approving the host environment that the limited module is used with. The manufacturer of a limited module must describe, both in the filing and in the installation instructions, the alternative means that the limited module manufacturer uses to verify that the host meets the necessary requirements to satisfy the module limiting conditions.

A limited module manufacturer has the flexibility to define its alternative method to address the conditions that limit the initial approval, such as: shielding, minimum signaling amplitude, buffered modulation/data inputs, or power supply regulation. The alternative method could include that the limited module manufacturer reviews detailed test data or host designs prior to giving the host manufacturer approval.

This limited module procedure is also applicable for RF exposure evaluation when it is necessary to demonstrate compliance in a specific host. The module manufacturer must state how control of the product into which the modular transmitter will be installed will be maintained such that full compliance of the product is always ensured. For additional hosts other than the specific host originally granted with a limited

module, a Class II permissive change is required on the module grant to register the additional host as a specific host also approved with the module.

Explanation: The module is a single module.

2.5 Trace antenna designs

For a modular transmitter with trace antenna designs, see the guidance in Question 11 of KDB Publication 996369 D02 FAQ – Modules for Micro-Strip Antennas and traces. The integration information shall include for the TCB review the integration instructions for the following aspects: layout of trace design, parts list (BOM), antenna, connectors, and isolation requirements.

- a) Information that includes permitted variances (e.g., trace boundary limits, thickness, length, width, shape(s), dielectric constant, and impedance as applicable for each type of antenna);
- b) Each design shall be considered a different type (e.g., antenna length in multiple(s) of frequency, the wavelength, and antenna shape (traces in phase) can affect antenna gain and must be considered);
- c) The parameters shall be provided in a manner permitting host manufacturers to design the printed circuit (PC) board layout;
- d) Appropriate parts by manufacturer and specifications;
- e) Test procedures for design verification; and
- f) Production test procedures for ensuring compliance.

The module grantee shall provide a notice that any deviation(s) from the defined parameters of the antenna trace, as described by the instructions, require that the host product manufacturer must notify the module grantee that they wish to change the antenna trace design. In this case, a Class II permissive change application is required to be filed by the grantee, or the host manufacturer can take responsibility through the change in FCC ID (new application) procedure followed by a Class II permissive change application.

Explanation: No, The module has no tracking antenna design, is FPC antenna.

2.6 RF exposure considerations

It is essential for module grantees to clearly and explicitly state the RF exposure conditions that permit a host product manufacturer to use the module. Two types of instructions are required for RF exposure information: (1) to the host product manufacturer, to define the application conditions (mobile, portable – xx cm from a person's body); and (2) additional text needed for the host product manufacturer to provide to end users in their end-product manuals. If RF exposure statements and use conditions are not provided, then the host product manufacturer is required to take responsibility of the module through a change in FCC ID (new application).

Explanation: This module complies with FCC RF radiation exposure limits set forth for an uncontrolled environment, This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body." This module is designed to comply with the FCC statement,

FCC ID: 2AYHE-2404B

2.7 Antennas

A list of antennas included in the application for certification must be provided in the instructions. For modular transmitters approved as limited modules, all applicable professional installer instructions must be included as part of the information to the host product manufacturer. The antenna list shall also identify the antenna types (monopole, PIFA, dipole, etc. (note that for example an “omni-directional antenna” is not considered to be a specific “antenna type”)).

For situations where the host product manufacturer is responsible for an external connector, for example with an RF pin and antenna trace design, the integration instructions shall inform the installer that unique antenna connector must be used on the Part 15 authorized transmitters used in the host product. The module manufacturers shall provide a list of acceptable unique connectors.

Explanation: The EUT only have one external antenna, Yes, the module contains a permanently attached antenna, The antenna gain is 2.4G: 2.6dBi, 5G antenna 4.2dBi.

2.8 Label and compliance information

Grantees are responsible for the continued compliance of their modules to the FCC rules. This

includes advising host product manufacturers that they need to provide a physical or e-label stating “Contains FCC ID” with their finished product. See Guidelines for Labeling and User Information for RF Devices – KDB Publication 784748.

Explanation: The host system using this module, should have label in a visible area indicated the following texts: "Contains FCC ID: 2AYHE-2404B

2.9 Information on test modes and additional testing requirements

Additional guidance for testing host products is given in KDB Publication 996369 D04 Module Integration Guide. Test modes should take into consideration different operational conditions for a stand-alone modular transmitter in a host, as well as for multiple simultaneously transmitting modules or other transmitters in a host product.

The grantee should provide information on how to configure test modes for host product evaluation for different operational conditions for a stand-alone modular transmitter in a host, versus with multiple, simultaneously transmitting modules or other transmitters in a host.

Grantees can increase the utility of their modular transmitters by providing special means, modes, or instructions that simulates or characterizes a connection by enabling a transmitter. This can greatly simplify a host manufacturer’s determination that a module as installed in a host complies with FCC requirements.

Explanation: Can increase the utility of our modular transmitters by providing instructions that simulates or characterizes a connection by enabling a transmitter.

2.10 Additional testing, Part 15 Subpart B disclaimer

The grantee should include a statement that the modular transmitter is only FCC authorized for the specific rule parts (i.e., FCC transmitter rules) listed on the grant, and that the host product manufacturer is responsible for compliance to any other FCC rules

that apply to the host not covered by the modular transmitter grant of certification. If the grantee markets their product as being Part 15

Subpart B compliant (when it also contains unintentional-radiator digital circuitry), then the grantee shall provide a notice stating that the final host product still requires Part 15 Subpart B compliance testing with the modular transmitter installed.

Explanation: The host should be evaluated by the FCC Subpart B.

This product uses FPC antenna ,The antenna gain is 2.4G: 2.6dBi, 5G antenna 4.2dBi.

IC statement

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired

operation of the device.

The term "IC: " before the certification/registration number only signifies that the Industry Canada technical specifications were met.

This product meets the applicable Industry Canada technical specifications.

Cet appareil contient des émetteurs / récepteurs exemptés de licence conformes aux RSS (RSS)

d'Innovation, Sciences et Développement économique Canada. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible

d'en compromettre le fonctionnement.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR

d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence.

L'exploitation est autorisée aux deux conditions suivantes :

- 1) L'appareil ne doit pas produire de brouillage;
- 2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est

susceptible d'en compromettre le fonctionnement.

Please notice that if the ICED certification number is not visible when the module is installed inside

another device, then the outside of the device into which the module is installed must display a label referring to the enclosed module. This exterior label can use wording such as the following:

"Contains IC: 26839-2404B" any similar wording that expresses the same meaning may be used. L'appareil hôte doit porter une étiquette donnant le numéro de certification du module d'Industrie

Canada, précédé des mots «Contient un module d'émission », du mot « IC: 26839-2404B » ou d'une formulation similaire exprimant le même sens, comme suit

The device meets the exemption from the routine evaluation limits in section 2.5 of RSS 102 and compliance with RSS-102 RF exposure, users can obtain Canadian information on RF exposure and compliance.

Le dispositif rencontre l'exemption des limites courantes d'évaluation dans la section 2.5 de RSS 102 et la conformité

à l'exposition de RSS-102 rf, utilisateurs peut obtenir l'information canadienne sur l'exposition et la conformité de rf.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.

Cet émetteur ne doit pas être Co-placé ou ne fonctionnant en même temps qu'aucune autre antenne ou émetteur.

Cet équipement devrait être installé et actionné avec une distance minimum de 20 centimètres entre le radiateur et votre corps.

Operation of this device is restricted to indoor use only. (5150-5250MHz)

Le fonctionnement de cet appareil est limité à une utilisation en intérieur uniquement.

(5150-5250MHz)

Cet émetteur radio IC : 26839-2404B a été approuvé par Innovation, Sciences et Développement économique Canada pour fonctionner avec les types d'antenne énumérés ci-dessous, avec le gain maximal admissible indiqué. Les types d'antenne non inclus dans cette liste qui ont un gain supérieur au gain maximum indiqué pour tout type répertorié sont strictement interdits pour une utilisation avec cet appareil.

The radio transmitter IC: 26839-2404B Has been approved by The Ministry of Innovation, Science and Economic Development of Canada to use the following antenna types with the specified maximum allowed gain. Antenna types not included in this list, whose gain is higher than the maximum gain of any type listed, are strictly prohibited from use with this device.

Type of antenna:↕	FPC antenna↕	↕
Antenna Gain:↕	2.4G :2400-2500(2.6dBi)↓ 5G :5150-5850MHz(4.2dBi)↕	↕
Impedance:↕	50hm↕	↕
Manufacture:↕	SHENZHEN LINRONG TECHNOLOGY CO.,LTD↕	↕
Model:↕	SD8↕	↕