



FCC Radio Test Report

FCC ID: 2BH7FRE765X

This report concerns:Original Grant

Project No. : 2409G039
Equipment : AX3000 Wi-Fi 6 Range Extender with AC Passthrough
Brand Name : tp-link
Test Model : RE765X
Series Model : N/A
Applicant : TP-Link Systems Inc.
Address : 10 Mauchly, Irvine, CA 92618
Manufacturer : TP-Link Systems Inc.
Address : 10 Mauchly, Irvine, CA 92618
Date of Receipt : Sep. 29, 2024
Date of Test : Oct. 09, 2024 ~ Nov. 22, 2024
Issued Date : Jan. 14, 2025
Report Version : R01
Test Sample : Engineering Sample No.: SSL2024092939 for AC Power Line Conducted Emissions and Radiated Emissions, for SSL2024092940 conducted.
Standard(s) : FCC CFR Title 47, Part 15, Subpart E

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

Prepared by

:

Chella Zheng

Chella Zheng

Approved by

:

Chay Cai

Chay Cai

Room 108-116, 309-310, Building 2, No.1, Yile Road, Songshan Lake Zone, Dongguan City,
Guangdong, People's Republic of China

Tel: +86-769-8318-3000

Web: www.newbtl.com

Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. BTL assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by BTL.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC17025:2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	6
1 . APPLICABLE STANDARDS	7
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
2.3 TEST ENVIRONMENT CONDITIONS	9
3 . GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 TEST MODES	14
3.3 PARAMETERS OF TEST SOFTWARE	20
3.4 DUTY CYCLE	24
3.5 BLOCKDIAGRAMSHOWINGTHECONFIGURATIONOFSYSTEMTESTED	28
3.6 SUPPORT UNITS	28
3.7 CUSTOMER INFORMATION DESCRIPTION	28
4 . AC POWER LINE CONDUCTED EMISSIONS	29
4.1 LIMIT	29
4.2 TEST PROCEDURE	29
4.3 DEVIATIONFROMTESTSTANDARD	29
4.4 TESTSETUP	30
4.5 EUT OPERATION CONDITIONS	30
4.6 TEST RESULTS	30
5 . RADIATED EMISSIONS	31
5.1 LIMIT	31
5.2 TEST PROCEDURE	32
5.3 DEVIATIONFROMTESTSTANDARD	33
5.4 TESTSETUP	33
5.5 EUT OPERATION CONDITIONS	35
5.6 TEST RESULTS - 9 KHZTO 30MHZ	35
5.7 TEST RESULTS - 30 MHZTO 1000 MHZ	35
5.8 TEST RESULTS - ABOVE1000 MHZ	35
6 . BANDWIDTH	36
6.1 LIMIT	36
6.2 TEST PROCEDURE	36

Table of Contents	Page
6.3 DEVIATION FROM STANDARD	36
6.4 TEST SETUP	37
6.5 EUT OPERATION CONDITIONS	37
6.6 TEST RESULTS	37
7 . MAXIMUM OUTPUT POWER	38
7.1 LIMIT	38
7.2 TEST PROCEDURE	38
7.3 DEVIATION FROM STANDARD	38
7.4 TEST SETUP	38
7.5 EUT OPERATION CONDITIONS	38
7.6 TEST RESULTS	38
8 . POWER SPECTRAL DENSITY	39
8.1 LIMIT	39
8.2 TEST PROCEDURE	39
8.3 DEVIATION FROM STANDARD	39
8.4 TEST SETUP	40
8.5 EUT OPERATION CONDITIONS	40
8.6 TEST RESULTS	40
9 . FREQUENCY STABILITY	41
9.1 LIMIT	41
9.2 TEST PROCEDURE	41
9.3 DEVIATION FROM STANDARD	41
9.4 TEST SETUP	41
9.5 EUT OPERATION CONDITIONS	41
9.6 TEST RESULTS	41
10 . MEASUREMENT INSTRUMENTS LIST	42
11 . EUT TEST PHOTOS	44
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	50
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	53
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	58
APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ	61
APPENDIXE -BANDWIDTH	198
APPENDIXF -MAXIMUM OUTPUT POWER	231

Table of Contents	Page
APPENDIXG - POWER SPECTRAL DENSITY	292

REPORT ISSUED HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-2-2409G039	R00	Original Report.	Dec. 30, 2024	Invalid
BTL-FCCP-2-2409G039	R01	Revised report to address comments.	Jan. 14, 2025	Valid

1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of A2LA:

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart E				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207 15.407(b)	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.407(b) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.407(a) 15.407(e)	Bandwidth	APPENDIX E	PASS	-----
15.407(a)	Maximum Output Power	APPENDIX F	PASS	-----
15.407(a)	Power Spectral Density	APPENDIX G	PASS	-----
15.407(g)	Frequency Stability	APPENDIX H	PASS	-----
15.203	Antenna Requirements	-----	PASS	NOTE (2)
15.407(c)	Automatically Discontinue Transmission	-----	PASS	NOTE (3)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.
- (3) During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.
- (4) For UNII-1 this device was functioned as a
 - ☐ Outdoor access point device
 - ☒ Indoor access point device
 - ☐ Fixed point-to-point access points device
 - ☒ Client device

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of 1-2/F, 4/F, Building A, 1-2/F, Building B, 3/F, Building C, No.3, Jinshagang 1st Road, Dalang Town, Dongguan City, Guangdong People's Republic of China
BTL's Registration Number for FCC: 747969
BTL's Designation Number for FCC: CN1377

2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-C02	CISPR	150kHz ~ 30MHz	2.88

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB01	CISPR	9kHz ~ 30MHz	2.36

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	30MHz ~ 200MHz	V	4.40
		30MHz ~ 200MHz	H	3.62
		200MHz ~ 1,000MHz	V	4.58
		200MHz ~ 1,000MHz	H	3.98

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB03 (3m)	CISPR	1GHz~ 6GHz	4.08
		6GHz~18GHz	4.62

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB03 (1m)	CISPR	18~26.5 GHz	3.36
		26.5~40 GHz	3.58

C. Other Measurement test:

Test Item	Uncertainty
Bandwidth	0.90 %
Maximum Output Power	1.3 dB
Power Spectral Density	1.4 dB
Temperature	0.8 °C
Humidity	2.2 %

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

2.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By	Test Date
AC Power Line Conducted Emissions	25°C	52%	AC 120V/60Hz	Hayden Chen	Oct. 23, 2024
Radiated Emissions-9kHz to 30MHz	26°C	47%	AC 120V/60Hz	Hayden Chen	Nov. 22, 2024
Radiated Emissions-30MHz to 1000MHz	21°C	50%	AC 120V/60Hz	Calvin Wen	Oct. 22, 2024
Radiated Emissions-Above 1000 MHz	21°C	51%	AC 120V/60Hz	Allen Tong	Oct. 24, 2024
	24°C	51%	AC 120V/60Hz	Allen Tong	Oct. 26, 2024
	24°C	51%	AC 120V/60Hz	Allen Tong	Oct. 29, 2024
Bandwidth	23-28°C	45-48	AC 120V/60Hz	Arvin Tong	Oct. 23, 2024~Nov. 07, 2024
Maximum Output Power	23-28°C	45-48	AC 120V/60Hz	Arvin Tong	Oct. 23, 2024~Nov. 07, 2024
Power Spectral Density	45°C	48	AC 120V/60Hz	Arvin Tong	Nov. 07, 2024

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	AX3000 Wi-Fi 6 Range Extender with AC Passthrough
Brand Name	tp-link
Test Model	RE765X
Series Model	N/A
Model Difference(s)	N/A
Software Version	V1.0
Hardware Version	V1.0
Power Source	AC Mains.
Power Rating	125V~60Hz 15A
Operation Frequency Band(s)	UNII-1: 5150 MHz~5250 MHz UNII-2A: 5250 MHz~5350 MHz UNII-2C: 5470 MHz ~ 5725 MHz UNII-3: 5725 MHz~5850 MHz
Modulation Type	IEEE 802.11a/n/ac: OFDM IEEE 802.11ax: OFDMA
Bit Rate of Transmitter	IEEE 802.11a: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 300 Mbps IEEE 802.11ac: up to 1733.4 Mbps IEEE 802.11ax: up to 2402 Mbps
Maximum Output Power UNII-1NonBeamforming	IEEE 802.11a: 26.62 dBm (0.4592 W)
Maximum Output Power UNII-2A Non Beamforming	IEEE 802.11ac(VHT40): 23.81 dBm (0.2404 W)
Maximum Output Power UNII-2C Non Beamforming	IEEE 802.11ax(HE20): 26.54 dBm (0.4508 W)
Maximum Output Power UNII-3 Non Beamforming	IEEE 802.11ac(VHT20): 26.76 dBm (0.4742 W)
Maximum Output Power UNII-1Beamforming	IEEE 802.11ac(VHT20): 26.03 dBm (0.4009 W)
Maximum Output Power UNII-2A Beamforming	IEEE 802.11ac(VHT40): 23.31 dBm (0.2143 W)
Maximum Output Power UNII-2C Beamforming	IEEE 802.11ax(HE20): 26.04 dBm (0.4018 W)
Maximum Output Power UNII-3 Beamforming	IEEE 802.11ac(VHT20): 26.33 dBm (0.4295 W)

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40)		IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80)	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40)		IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80)	
UNII-2A		UNII-2A		UNII-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40)		IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80)	
UNII-2C		UNII-2C		UNII-2C	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590	138	5690
112	5560	126	5630		
116	5580	134	5670		
120	5600	142	5710		
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				
144	5720				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40)		IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80)	
UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

IEEE 802.11ac(VHT160) IEEE 802.11ax(HE160)	
Channel	Frequency(MHz)
50	5250
114	5570

3. Antenna Specification:

Ant.	Manufacturer	P/N	Antenna Type	Connector	Gain (dBi)
1	TP-Link Systems Inc.	3101507181	Dipole	IPEX	2.00
2	TP-Link Systems Inc.	3101507182	Dipole	IPEX	2.00

Note:

- This EUT supports CDD, and all antennas have the same gain, Directional gain = $G_{ANT} + \text{Array Gain}$. For power measurements, Array Gain=0dB ($N_{ANT} \leq 4$), so the Directional gain=2.00. For power spectral density measurements, $N_{ANT}=4$, $N_{SS} = 1$. So the Directional gain= $G_{ANT} + \text{Array Gain} = G_{ANT} + 10\log(N_{ANT}/N_{SS})\text{dBi} = 2.00 + 10\log(2/1)\text{dBi} = 5.01$.
- Beamforming Gain: 3 dB. So Beamforming Directional gain = $2+3=5.00$.

4. Table for Antenna Configuration:

For Non Beamforming:

Operating Mode	TX Mode	2TX
IEEE 802.11a		V (Ant. 1 + Ant. 2)
IEEE 802.11n(HT20)		V (Ant. 1 + Ant. 2)
IEEE 802.11n(HT40)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac(VHT20)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac(VHT40)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac(VHT80)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac(VHT160)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax(HE20)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax(HE40)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax(HE80)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax(HE160)		V (Ant. 1 + Ant. 2)

For Beamforming:

Operating Mode	TX Mode	2TX
IEEE 802.11n(HT20)		V (Ant. 1 + Ant. 2)
IEEE 802.11n(HT40)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac(VHT20)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac(VHT40)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac(VHT80)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac(VHT160)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax(HE20)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax(HE40)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax(HE80)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax(HE160)		V (Ant. 1 + Ant. 2)

3.2 TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 2	TX AC(VHT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX AC(VHT40) Mode Channel 38/46 (UNII-1)
Mode 4	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 5	TX AX(HE20) Mode Channel 36/40/48 (UNII-1)
Mode 6	TX AX(HE40) Mode Channel 38/46 (UNII-1)
Mode 7	TX AX(HE80) Mode Channel 42 (UNII-1)
Mode 8	TX A Mode Channel 52/60/64 (UNII-2A)
Mode 9	TX AC(VHT20) Mode Channel 52/60/64 (UNII-2A)
Mode 10	TX AC(VHT40) Mode Channel 54/62 (UNII-2A)
Mode 11	TX AC(VHT80) Mode Channel 58 (UNII-2A)
Mode 12	TX AX(HE20) Mode Channel 52/60/64 (UNII-2A)
Mode 13	TX AX(HE40) Mode Channel 54/62 (UNII-2A)
Mode 14	TX AX(HE80) Mode Channel 58 (UNII-2A)
Mode 15	TX AC(VHT160) Mode Channel 50 (UNII-1+UNII-2A)
Mode 16	TX AX(HE160) Mode Channel 50 (UNII-1+UNII-2A)
Mode 17	TX A Mode Channel 100/116/140 (UNII-2C)
Mode 18	TX AC(VHT20) Mode Channel 100/116/140/144 (UNII-2C)
Mode 19	TX AC(VHT40) Mode Channel 102/110/134/142 (UNII-2C)
Mode 20	TX AC(VHT80) Mode Channel 106/122/138 (UNII-2C)
Mode 21	TX AC(VHT160) Mode Channel 114 (UNII-2C)
Mode 22	TX AX(HE20) Mode Channel 100/116/140/144 (UNII-2C)
Mode 23	TX AX(HE40) Mode Channel 102/110/134/142 (UNII-2C)
Mode 24	TX AX(HE80) Mode Channel 106/122/138 (UNII-2C)
Mode 25	TX AX(HE160) Mode Channel 114 (UNII-2C)
Mode 26	TX A Mode Channel 149/157/165 (UNII-3)
Mode 27	TX AC(VHT20) Mode Channel 149/157/165 (UNII-3)
Mode 28	TX AC(VHT40) Mode Channel 151/159 (UNII-3)
Mode 29	TX AC(VHT80) Mode Channel 155 (UNII-3)
Mode 30	TX AX(HE20) Mode Channel 149/157/165 (UNII-3)
Mode 31	TX AX(HE40) Mode Channel 151/159 (UNII-3)
Mode 32	TX AX(HE80) Mode Channel 155 (UNII-3)
Mode 33	TX AC(VHT20) Mode Channel 149 (UNII-3)

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 33	TX AC(VHT20) Mode Channel 149 (UNII-3)

Radiated Emissions Test - Below 1GHz	
Final Test Mode	Description
Mode 33	TX AC(VHT20) Mode Channel 149 (UNII-3)

Radiated Emissions Test - Above 1GHz	
Final Test Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 2	TX AC(VHT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX AC(VHT40) Mode Channel 38/46 (UNII-1)
Mode 4	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 5	TX AX(HE20) Mode Channel 36/40/48 (UNII-1)
Mode 6	TX AX(HE40) Mode Channel 38/46 (UNII-1)
Mode 7	TX AX(HE80) Mode Channel 42 (UNII-1)
Mode 8	TX A Mode Channel 52/60/64 (UNII-2A)
Mode 9	TX AC(VHT20) Mode Channel 52/60/64 (UNII-2A)
Mode 10	TX AC(VHT40) Mode Channel 54/62 (UNII-2A)
Mode 11	TX AC(VHT80) Mode Channel 58 (UNII-2A)
Mode 12	TX AX(HE20) Mode Channel 52/60/64 (UNII-2A)
Mode 13	TX AX(HE40) Mode Channel 54/62 (UNII-2A)
Mode 14	TX AX(HE80) Mode Channel 58 (UNII-2A)
Mode 15	TX AC(VHT160) Mode Channel 50 (UNII-1+UNII-2A)
Mode 16	TX AX(HE160) Mode Channel 50 (UNII-1+UNII-2A)
Mode 17	TX A Mode Channel 100/116/140 (UNII-2C)
Mode 18	TX AC(VHT20) Mode Channel 100/116/140/144 (UNII-2C)
Mode 19	TX AC(VHT40) Mode Channel 102/110/134/142 (UNII-2C)
Mode 20	TX AC(VHT80) Mode Channel 106/122/138 (UNII-2C)
Mode 21	TX AC(VHT160) Mode Channel 114 (UNII-2C)
Mode 22	TX AX(HE20) Mode Channel 100/116/140/144 (UNII-2C)
Mode 23	TX AX(HE40) Mode Channel 102/110/134/142 (UNII-2C)
Mode 24	TX AX(HE80) Mode Channel 106/122/138 (UNII-2C)
Mode 25	TX AX(HE160) Mode Channel 114 (UNII-2C)
Mode 26	TX A Mode Channel 149/157/165 (UNII-3)
Mode 27	TX AC(VHT20) Mode Channel 149/157/165 (UNII-3)
Mode 28	TX AC(VHT40) Mode Channel 151/159 (UNII-3)
Mode 29	TX AC(VHT80) Mode Channel 155 (UNII-3)
Mode 30	TX AX(HE20) Mode Channel 149/157/165 (UNII-3)

Mode 31	TX AX(HE40) Mode Channel 151/159 (UNII-3)
Mode 32	TX AX(HE80) Mode Channel 155 (UNII-3)

Maximum Output Power_ Non Beamforming	
Final Test Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 2	TX AC(VHT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX AC(VHT40) Mode Channel 38/46 (UNII-1)
Mode 4	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 5	TX AX(HE20) Mode Channel 36/40/48 (UNII-1)
Mode 6	TX AX(HE40) Mode Channel 38/46 (UNII-1)
Mode 7	TX AX(HE80) Mode Channel 42 (UNII-1)
Mode 8	TX A Mode Channel 52/60/64 (UNII-2A)
Mode 9	TX AC(VHT20) Mode Channel 52/60/64 (UNII-2A)
Mode 10	TX AC(VHT40) Mode Channel 54/62 (UNII-2A)
Mode 11	TX AC(VHT80) Mode Channel 58 (UNII-2A)
Mode 12	TX AX(HE20) Mode Channel 52/60/64 (UNII-2A)
Mode 13	TX AX(HE40) Mode Channel 54/62 (UNII-2A)
Mode 14	TX AX(HE80) Mode Channel 58 (UNII-2A)
Mode 15	TX AC(VHT160) Mode Channel 50 (UNII-1+UNII-2A)
Mode 16	TX AX(HE160) Mode Channel 50 (UNII-1+UNII-2A)
Mode 17	TX A Mode Channel 100/116/140 (UNII-2C)
Mode 18	TX AC(VHT20) Mode Channel 100/116/140/144 (UNII-2C)
Mode 19	TX AC(VHT40) Mode Channel 102/110/134/142 (UNII-2C)
Mode 20	TX AC(VHT80) Mode Channel 106/122/138 (UNII-2C)
Mode 21	TX AC(VHT160) Mode Channel 114 (UNII-2C)
Mode 22	TX AX(HE20) Mode Channel 100/116/140/144 (UNII-2C)
Mode 23	TX AX(HE40) Mode Channel 102/110/134/142 (UNII-2C)
Mode 24	TX AX(HE80) Mode Channel 106/122/138 (UNII-2C)
Mode 25	TX AX(HE160) Mode Channel 114 (UNII-2C)
Mode 26	TX A Mode Channel 149/157/165 (UNII-3)
Mode 27	TX AC(VHT20) Mode Channel 149/157/165 (UNII-3)
Mode 28	TX AC(VHT40) Mode Channel 151/159 (UNII-3)
Mode 29	TX AC(VHT80) Mode Channel 155 (UNII-3)
Mode 30	TX AX(HE20) Mode Channel 149/157/165 (UNII-3)
Mode 31	TX AX(HE40) Mode Channel 151/159 (UNII-3)
Mode 32	TX AX(HE80) Mode Channel 155 (UNII-3)

Maximum Output Power_ Beamforming	
Final Test Mode	Description
Mode 2	TX AC(VHT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX AC(VHT40) Mode Channel 38/46 (UNII-1)
Mode 4	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 5	TX AX(HE20) Mode Channel 36/40/48 (UNII-1)
Mode 6	TX AX(HE40) Mode Channel 38/46 (UNII-1)
Mode 7	TX AX(HE80) Mode Channel 42 (UNII-1)
Mode 9	TX AC(VHT20) Mode Channel 52/60/64 (UNII-2A)
Mode 10	TX AC(VHT40) Mode Channel 54/62 (UNII-2A)
Mode 11	TX AC(VHT80) Mode Channel 58 (UNII-2A)
Mode 12	TX AX(HE20) Mode Channel 52/60/64 (UNII-2A)
Mode 13	TX AX(HE40) Mode Channel 54/62 (UNII-2A)
Mode 14	TX AX(HE80) Mode Channel 58 (UNII-2A)
Mode 15	TX AC(VHT160) Mode Channel 50 (UNII-1+UNII-2A)
Mode 16	TX AX(HE160) Mode Channel 50 (UNII-1+UNII-2A)
Mode 18	TX AC(VHT20) Mode Channel 100/116/140/144 (UNII-2C)
Mode 19	TX AC(VHT40) Mode Channel 102/110/134/142 (UNII-2C)
Mode 20	TX AC(VHT80) Mode Channel 106/122/138 (UNII-2C)
Mode 21	TX AC(VHT160) Mode Channel 114 (UNII-2C)
Mode 22	TX AX(HE20) Mode Channel 100/116/140/144 (UNII-2C)
Mode 23	TX AX(HE40) Mode Channel 102/110/134/142 (UNII-2C)
Mode 24	TX AX(HE80) Mode Channel 106/122/138 (UNII-2C)
Mode 25	TX AX(HE160) Mode Channel 114 (UNII-2C)
Mode 27	TX AC(VHT20) Mode Channel 149/157/165 (UNII-3)
Mode 28	TX AC(VHT40) Mode Channel 151/159 (UNII-3)
Mode 29	TX AC(VHT80) Mode Channel 155 (UNII-3)
Mode 30	TX AX(HE20) Mode Channel 149/157/165 (UNII-3)
Mode 31	TX AX(HE40) Mode Channel 151/159 (UNII-3)
Mode 32	TX AX(HE80) Mode Channel 155 (UNII-3)

Other Conducted Test_ Non Beamforming	
Final Test Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 2	TX AC(VHT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX AC(VHT40) Mode Channel 38/46 (UNII-1)
Mode 4	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 5	TX AX(HE20) Mode Channel 36/40/48 (UNII-1)
Mode 6	TX AX(HE40) Mode Channel 38/46 (UNII-1)
Mode 7	TX AX(HE80) Mode Channel 42 (UNII-1)
Mode 8	TX A Mode Channel 52/60/64 (UNII-2A)
Mode 9	TX AC(VHT20) Mode Channel 52/60/64 (UNII-2A)
Mode 10	TX AC(VHT40) Mode Channel 54/62 (UNII-2A)
Mode 11	TX AC(VHT80) Mode Channel 58 (UNII-2A)
Mode 12	TX AX(HE20) Mode Channel 52/60/64 (UNII-2A)
Mode 13	TX AX(HE40) Mode Channel 54/62 (UNII-2A)
Mode 14	TX AX(HE80) Mode Channel 58 (UNII-2A)
Mode 15	TX AC(VHT160) Mode Channel 50 (UNII-1+UNII-2A)
Mode 16	TX AX(HE160) Mode Channel 50 (UNII-1+UNII-2A)
Mode 17	TX A Mode Channel 100/116/140 (UNII-2C)
Mode 18	TX AC(VHT20) Mode Channel 100/116/140/144 (UNII-2C)
Mode 19	TX AC(VHT40) Mode Channel 102/110/134/142 (UNII-2C)
Mode 20	TX AC(VHT80) Mode Channel 106/122/138 (UNII-2C)
Mode 21	TX AC(VHT160) Mode Channel 114 (UNII-2C)
Mode 22	TX AX(HE20) Mode Channel 100/116/140/144 (UNII-2C)
Mode 23	TX AX(HE40) Mode Channel 102/110/134/142 (UNII-2C)
Mode 24	TX AX(HE80) Mode Channel 106/122/138 (UNII-2C)
Mode 25	TX AX(HE160) Mode Channel 114 (UNII-2C)
Mode 26	TX A Mode Channel 149/157/165 (UNII-3)
Mode 27	TX AC(VHT20) Mode Channel 149/157/165 (UNII-3)
Mode 28	TX AC(VHT40) Mode Channel 151/159 (UNII-3)
Mode 29	TX AC(VHT80) Mode Channel 155 (UNII-3)
Mode 30	TX AX(HE20) Mode Channel 149/157/165 (UNII-3)
Mode 31	TX AX(HE40) Mode Channel 151/159 (UNII-3)
Mode 32	TX AX(HE80) Mode Channel 155 (UNII-3)

Note:

- (1) For AC power line conducted emissions and radiated emission below 1 GHz test, the TX AC(VHT20) Mode Channel 149 (UNII-3) is found to be the worst case and recorded.
- (2) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz and 26.5GHz~40GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (3) For radiated emission Harmonic 18-40GHz test, only tested the worst case and recorded.
- (4) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.
- (5) VHT20/VHT40 covers HT20/HT40, due to same modulation. The power setting for 802.11n HT20 and HT40 are the same or lower than 802.11ac VHT20 and VHT40
- (6) The measurements for Output Power are tested, the Non Beamforming and Beamforming are recorded in the report. The worst case is Non Beamforming and only the worst case is documented for other test items.
- (7) For radiated emission above 1GHz test, the Vertical antennas and Horizontal antennas are evaluated, the worst case is Vertical antennas and recorded.
- (8) IEEE 802.11ax mode only supports full RU, so only the full RU is evaluated and measured inside report.

3.3 PARAMETERS OF TEST SOFTWARE

Non Beamforming

UNII-1			
Test Software Version	QDART-1.0.67		
Frequency (MHz)	5180	5200	5240
IEEE 802.11a	19.5	22	23
IEEE 802.11ac(VHT20)	21	22	23.5
IEEE 802.11ax(HE20)	21	22	23.5
Frequency (MHz)	5190	5230	
IEEE 802.11ac(VHT40)	16.5	21.5	
IEEE 802.11ax(HE40)	16.5	21.5	
Frequency (MHz)	5210		
IEEE 802.11ac(VHT80)	17		
IEEE 802.11ax(HE80)	18.5		

UNII-2A			
Test Software Version	QDART-1.0.67		
Frequency (MHz)	5260	5300	5320
IEEE 802.11a	19	19.5	19.5
IEEE 802.11ac(VHT20)	19.5	20	20
IEEE 802.11ax(HE20)	19.5	20	20
Frequency (MHz)	5270	5310	
IEEE 802.11ac(VHT40)	20.5	18.5	
IEEE 802.11ax(HE40)	20.5	18.5	
Frequency (MHz)	5290		
IEEE 802.11ac(VHT80)	19		
IEEE 802.11ax(HE80)	19		

UNII-1+UNII-2A	
Test Software Version	QDART-1.0.67
Frequency (MHz)	5250
IEEE 802.11ac(VHT160)	16.5
IEEE 802.11ax(HE160)	18

UNII-2C			
Test Software Version	QDART-1.0.67		
Frequency (MHz)	5500	5580	5700
IEEE 802.11a	18.5	18.5	18.5
IEEE 802.11ac(VHT20)	19.5	19.5	19
IEEE 802.11ax(HE20)	19.5	19	19
Frequency (MHz)	5510	5550	5670
IEEE 802.11ac(VHT40)	20	20.5	20.5
IEEE 802.11ax(HE40)	20	20.5	20.5
Frequency (MHz)	5530	5610	
IEEE 802.11ac(VHT80)	21	21	
IEEE 802.11ax(HE80)	18.5	21	
Frequency (MHz)	5570		
IEEE 802.11ac(VHT160)	16.5		
IEEE 802.11ax(HE160)	17		

UNII-3			
Test Software Version	QDART-1.0.67		
Frequency (MHz)	5745	5785	5825
IEEE 802.11a	23	23	23
IEEE 802.11ac(VHT20)	23.5	23.5	23.5
IEEE 802.11ax(HE20)	23	23	23.5
Frequency (MHz)	5755	5795	
IEEE 802.11ac(VHT40)	22.5	23	
IEEE 802.11ax(HE40)	22.5	23	
Frequency (MHz)	5775		
IEEE 802.11ac(VHT80)	22.5		
IEEE 802.11ax(HE80)	22		

Beamforming

UNII-1			
Test Software Version	QDART-1.0.67		
Frequency (MHz)	5180	5200	5240
IEEE 802.11ac(VHT20)	20.5	21.5	23
IEEE 802.11ax(HE20)	20.5	21.5	23
Frequency (MHz)	5190	5230	
IEEE 802.11ac(VHT40)	16	21	
IEEE 802.11ax(HE40)	16	21	
Frequency (MHz)	5210		
IEEE 802.11ac(VHT80)	16.5		
IEEE 802.11ax(HE80)	18		

UNII-2A			
Test Software Version	QDART-1.0.67		
Frequency (MHz)	5260	5300	5320
IEEE 802.11ac(VHT20)	19	19.5	19.5
IEEE 802.11ax(HE20)	19	19.5	19.5
Frequency (MHz)	5270	5310	
IEEE 802.11ac(VHT40)	20	18	
IEEE 802.11ax(HE40)	20	18	
Frequency (MHz)	5290		
IEEE 802.11ac(VHT80)	18.5		
IEEE 802.11ax(HE80)	18.5		

UNII-1+UNII-2A	
Test Software Version	QDART-1.0.67
Frequency (MHz)	5250
IEEE 802.11ac(VHT160)	16
IEEE 802.11ax(HE160)	17.5

UNII-2C			
Test Software Version	QDART-1.0.67		
Frequency (MHz)	5500	5580	5700
IEEE 802.11ac(VHT20)	19	19	18.5
IEEE 802.11ax(HE20)	19	18.5	18.5
Frequency (MHz)	5510	5550	5670
IEEE 802.11ac(VHT40)	19.5	20	20
IEEE 802.11ax(HE40)	19.5	20	20
Frequency (MHz)	5530	5610	
IEEE 802.11ac(VHT80)	20.5	20.5	
IEEE 802.11ax(HE80)	18	20.5	
Frequency (MHz)	5570		
IEEE 802.11ac(VHT160)	16		
IEEE 802.11ax(HE160)	16.5		

UNII-3			
Test Software Version	QDART-1.0.67		
Frequency (MHz)	5745	5785	5825
IEEE 802.11ac(VHT20)	23	23	23
IEEE 802.11ax(HE20)	22.5	22.5	23
Frequency (MHz)	5755	5795	
IEEE 802.11ac(VHT40)	22	22.5	
IEEE 802.11ax(HE40)	22	22.5	
Frequency (MHz)	5775		
IEEE 802.11ac(VHT80)	22		
IEEE 802.11ax(HE80)	21.5		

3.4 DUTY CYCLE


If duty cycle is $\geq 98\%$, duty factor is not required.

If duty cycle is $< 98\%$, duty factor shall be considered.

The output power = measured power + duty factor.

The power spectral density = measured power spectral density + duty factor.


IEEE 802.11a

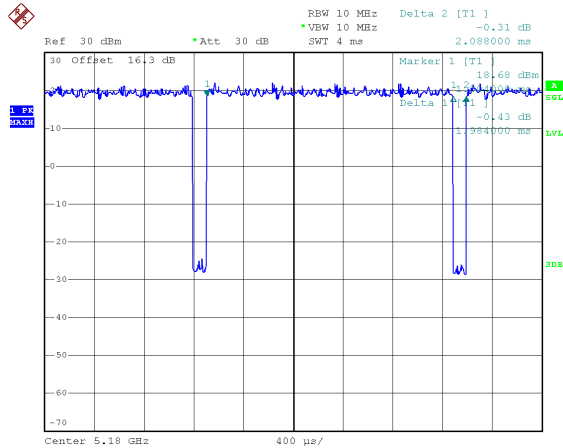

Date: 23.OCT.2024 10:08:28

Duty cycle = 1.984 ms / 2.088 ms = 95.02%
Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.22$


IEEE 802.11ac(VHT20)

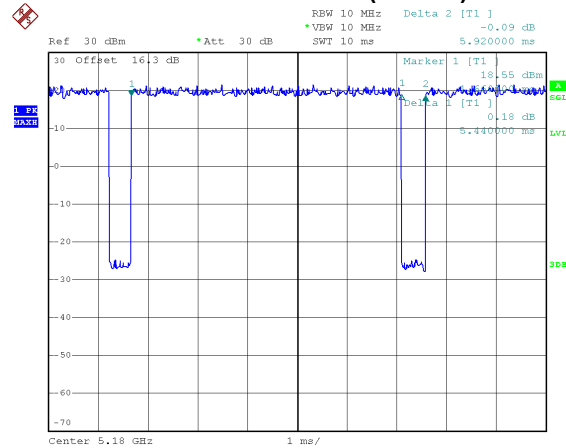

Date: 23.OCT.2024 10:11:58

Duty cycle = 5.440 ms / 5.920 ms = 91.89%
Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.37$


IEEE 802.11ac(VHT40)

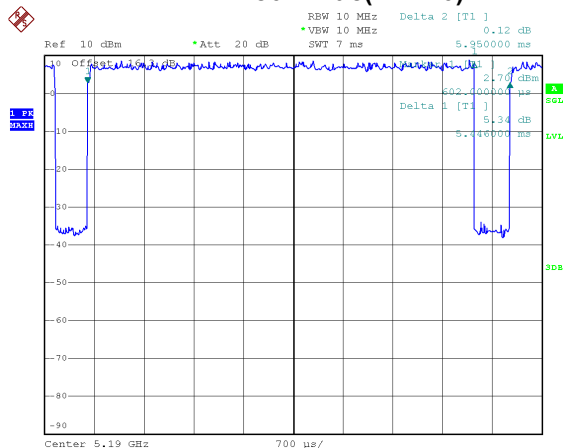

Date: 23.OCT.2024 10:14:39

Duty cycle = 5.446 ms / 5.950 ms = 91.53%
Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.38$


IEEE 802.11ac(VHT80)

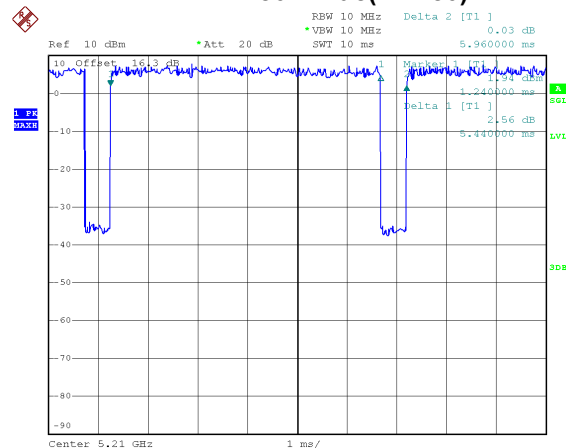

Date: 23.OCT.2024 10:16:32

Duty cycle = 5.440 ms / 5.960 ms = 91.28%
Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.40$


IEEE 802.11ac(VHT160)

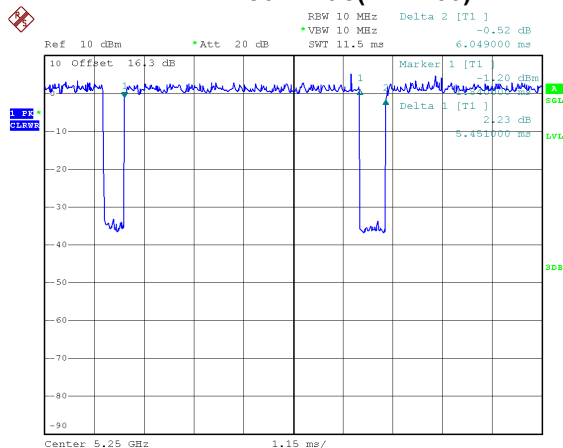

Date: 23.OCT.2024 10:18:26

Duty cycle = 5.451 ms / 6.049 ms = 90.11%
Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.45$


IEEE 802.11ax(HE20)

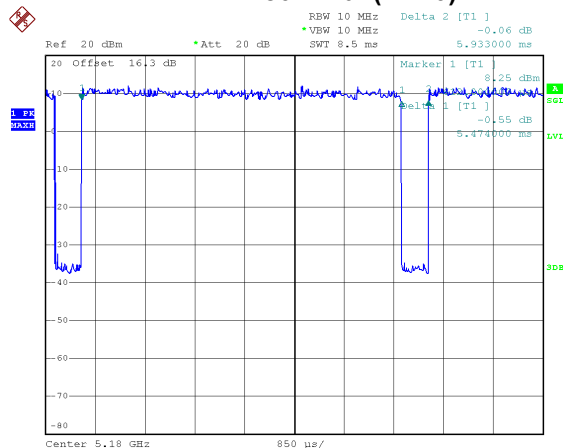

Date: 23.OCT.2024 10:19:09

Duty cycle = 5.474 ms / 5.933 ms = 92.26%
Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.35$


IEEE 802.11ax(HE40)

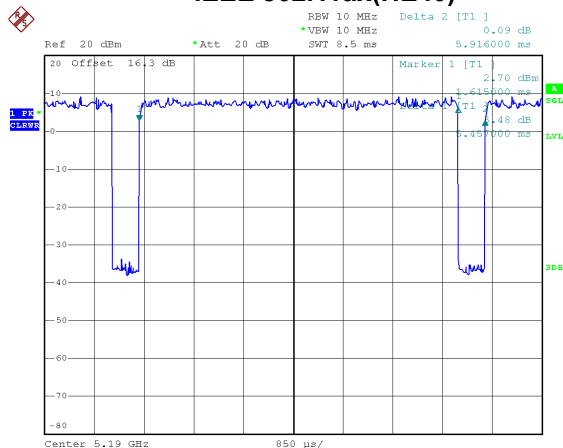

Date: 23.OCT.2024 10:19:30


Duty cycle = 5.457 ms / 5.916 ms = 92.24%
Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.35$

IEEE 802.11ax(HE80)

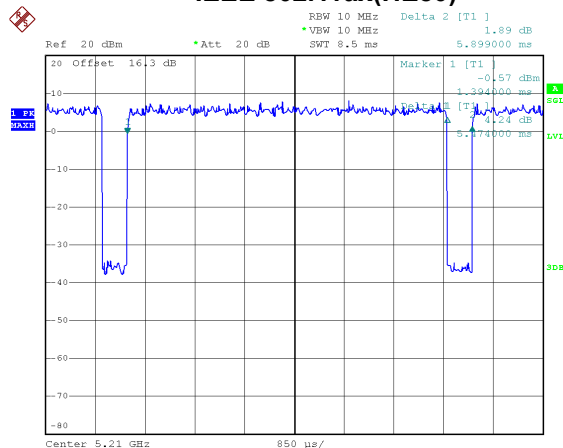

Date: 23.OCT.2024 10:20:32

Duty cycle = 5.474 ms / 5.899 ms = 92.80%
Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.32$

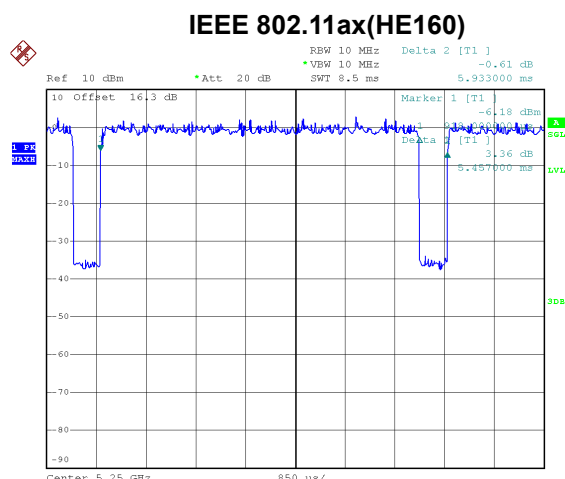

Date: 23.OCT.2024 10:21:40

Duty cycle = 5.457 ms / 5.933 ms = 91.98%
Duty Factor = 10 log(1 / Duty cycle) = 0.36

NOTE:

For IEEE 802.11a:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 504 Hz (Duty cycle < 98%).

For IEEE 802.11n(HT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 184 Hz (Duty cycle < 98%).

For IEEE 802.11n(HT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 183 Hz (Duty cycle < 98%).

For IEEE 802.11ac(VHT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 184 Hz (Duty cycle < 98%).

For IEEE 802.11ac(VHT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 184 Hz (Duty cycle < 98%).

For IEEE 802.11ac(VHT80):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 184 Hz (Duty cycle < 98%).

For IEEE 802.11ac(VHT160):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 183 Hz (Duty cycle < 98%).

For IEEE 802.11ax(HE20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 183 Hz (Duty cycle < 98%).

For IEEE 802.11ax(HE40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 183 Hz (Duty cycle < 98%).


For IEEE 802.11ax(HE80):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 183 Hz (Duty cycle < 98%).

For IEEE 802.11ax(HE160):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 183 Hz (Duty cycle < 98%).

3.5 BLOCKDIAGRAMSHOWINGTHECONFIGURATIONOFSYSTEMTESTED

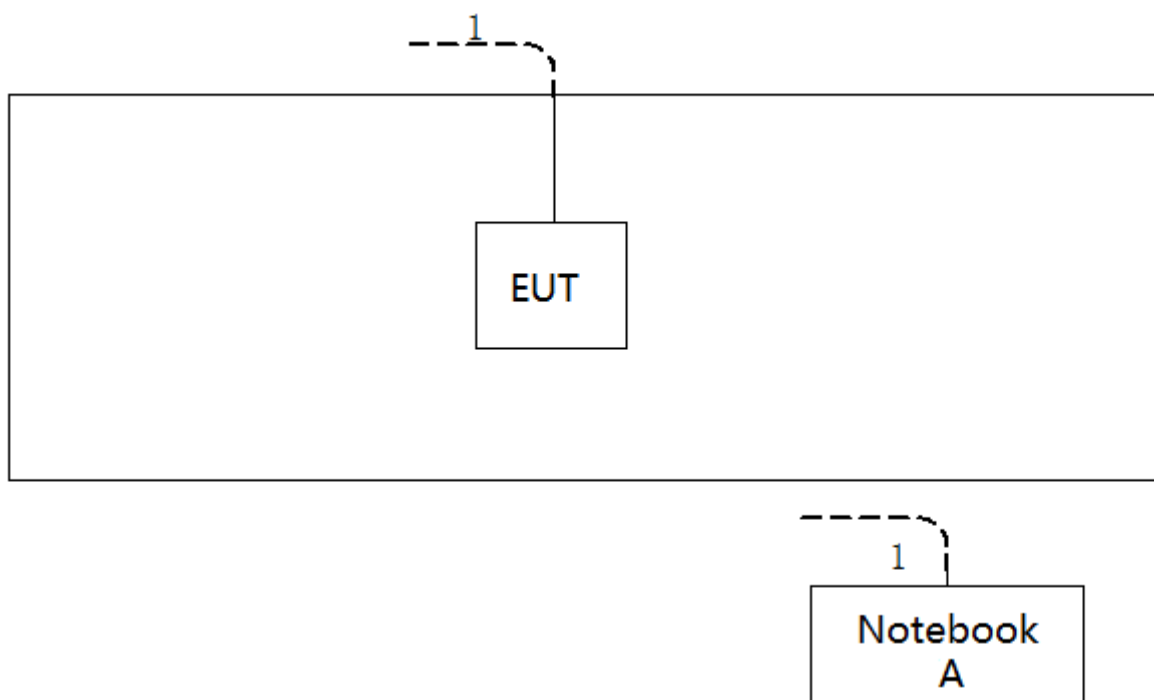

3.6 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	Dell	Inspiron 15-7559	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	RJ45 Cable	NO	NO	10m

3.7 CUSTOMER INFORMATION DESCRIPTION

- 1) The antenna gain and beamforming gain are provided by the manufacturer.
- 2) Except for AC power line conducted emissions and radiated emissions, the results of all test items include cable losses. Part of the cable losses (1.0dB) are provided by the manufacturer, while the other parts of the cable losses are provided by the testing laboratory.

4. AC POWER LINE CONDUCTED EMISSIONS

4.1 LIMIT

Frequency (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameter	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.3 DEVIATION FROM TEST STANDARD

No deviation

4.4 TESTSETUP

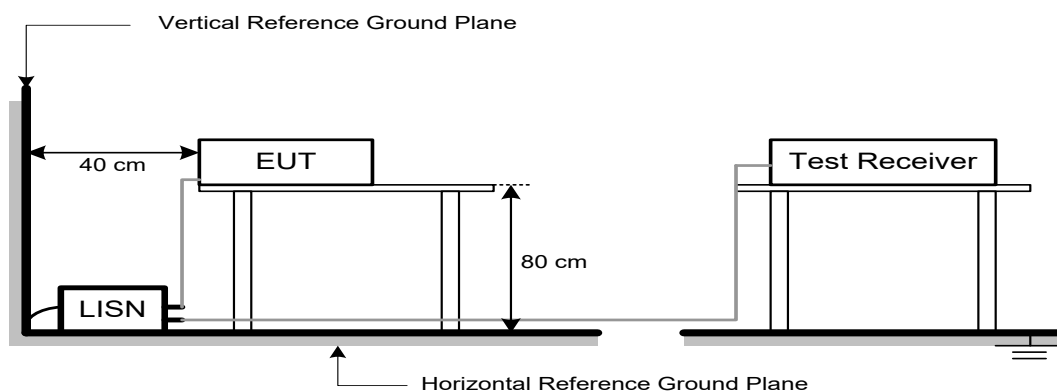

4.5 EUT OPERATION CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX mode.

4.6 TEST RESULTS

Please refer to the APPENDIX A.

5. RADIATED EMISSIONS

5.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS (Above 1000 MHz)

Frequency (MHz)	EIRP Limit (dBm/MHz)	Band edge at 3m (dBμV/m)	Harmonic at 1m (dBμV/m)
5150-5250	-27	68.2	77.7 (Note 3)
5250-5350	-27	68.2	77.7 (Note 3)
5470-5725	-27	68.2	77.7 (Note 3)
5725-5850 NOTE (2)	-27	68.2	77.7 (Note 3)
	10	105.2	114.7 (Note 3)
	15.6	110.8	120.3 (Note 3)
	27	122.2	131.7 (Note 3)

NOTE:

(1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

(2) According to 15.407(b)(4)(i), all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(3)

$$FS_{\text{limit}} = FS_{\text{max}} - 20\log\left(\frac{d_{\text{limit}}}{d_{\text{measure}}}\right)$$

$20\log(d_{\text{limit}}/d_{\text{measure}}) = 20\log(3/1) = 9.5 \text{ dB}$.

FS_{limit} : Harmonic at 3m Peak and Average limit.

FS_{max} : Harmonic at 1m Peak and Average Maximum value.

d_{limit} : Harmonic at 3m test distance.

d_{measure} : Harmonic Actual test distance.

5.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m or 1m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
(below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic or 40 GHz, whichever is lower
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for PK value 1MHz / 1/THz for AVG value


Receiver Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector
Start ~ Stop Frequency	1 GHz~40GHz for PK/AVG detector

5.3 DEVIATIONFROMTESTSTANDARD


No deviation.

5.4 TESTSETUP

9 kHz to 30 MHz

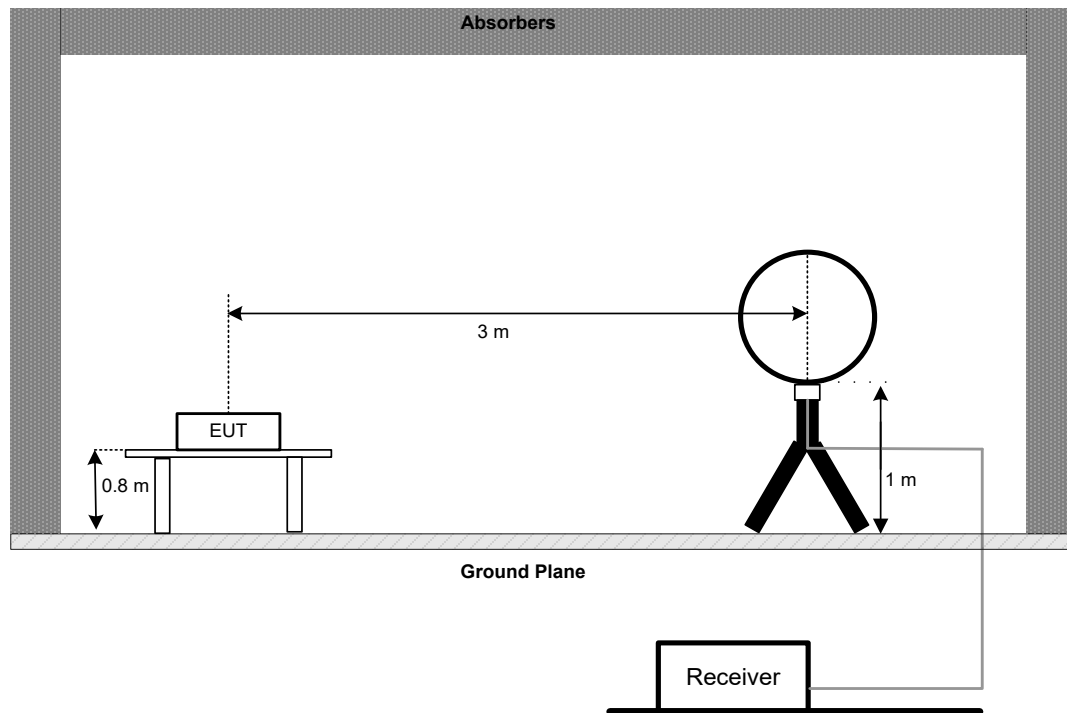


30 MHz to 1 GHz

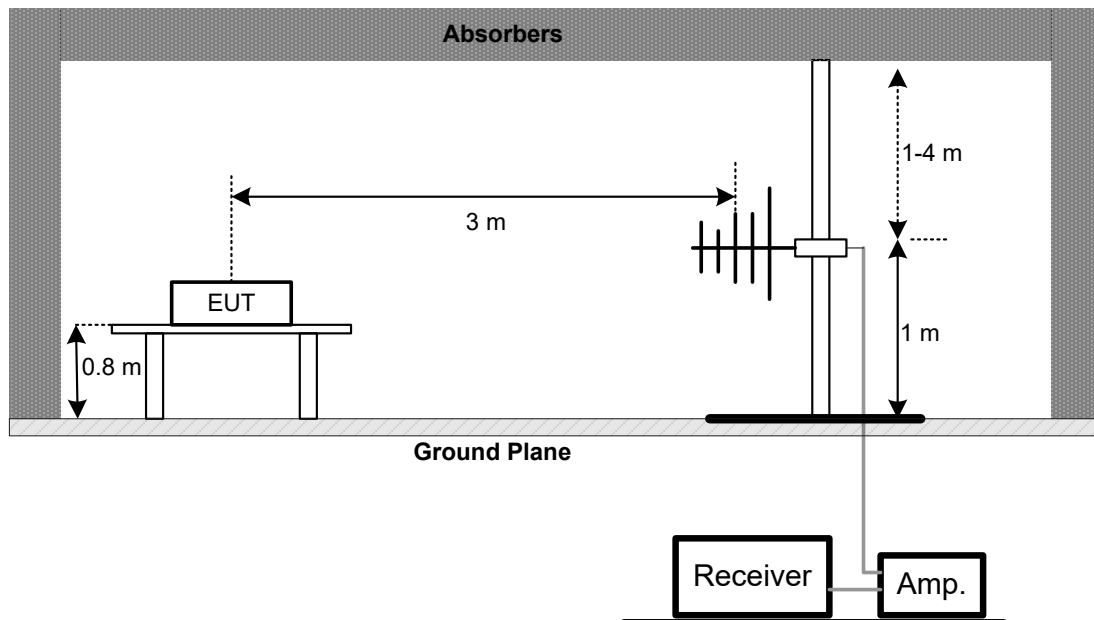


Above 1 GHz

Band edge & Harmonic (1 GHz to 18 GHz)

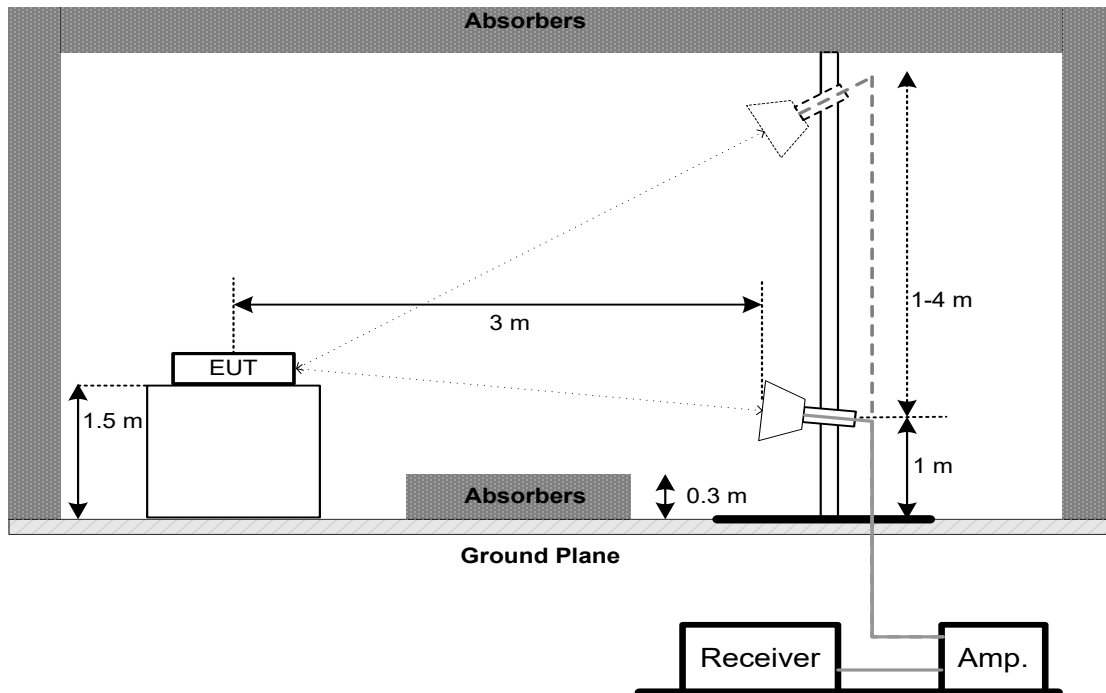

Harmonic (18 GHz to 40 GHz)

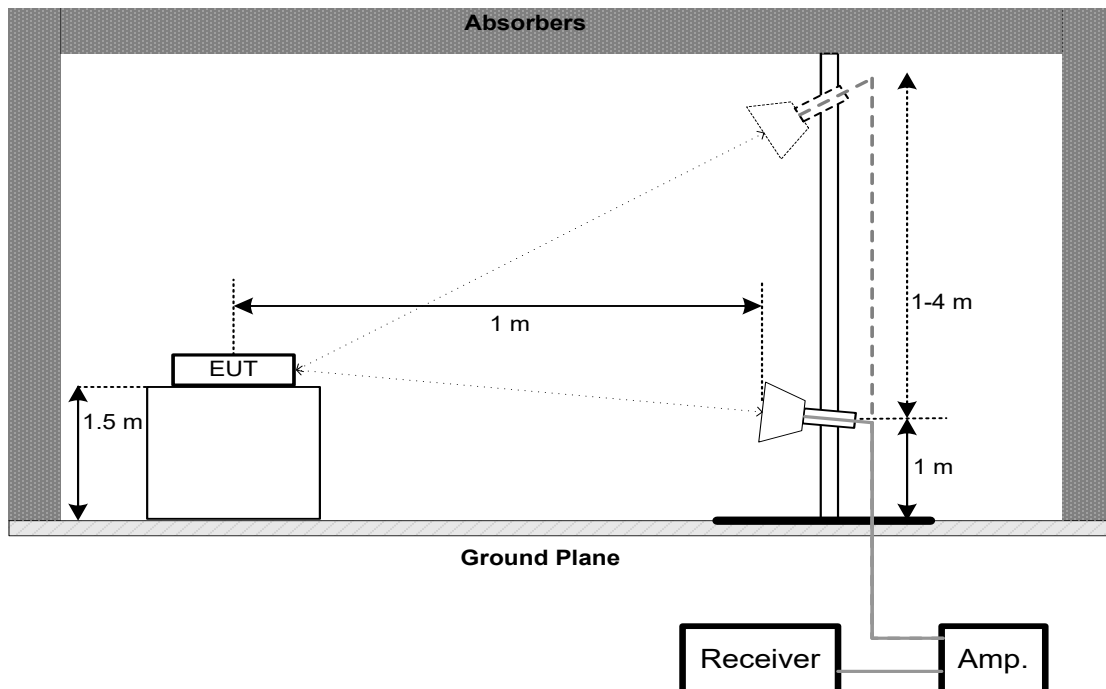

5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULTS - 9 KHZTO 30MHZ

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBUV) + distance extrapolation factor.

5.7 TEST RESULTS - 30 MHZTO 1000 MHZ

Please refer to the APPENDIX C.

5.8 TEST RESULTS - ABOVE1000 MHZ

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

6. BANDWIDTH

6.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a) FCC 15.407(e)	26 dB Bandwidth	-	5150-5250
	26 dB Bandwidth	-	5250-5350
	26 dB Bandwidth	-	5470-5725
	6dB Bandwidth	Minimum 500 kHz	5725-5850

6.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below
- b. Spectrum Setting:
For UNII-1, UNII-2A, UNII-2C:

Spectrum Parameter	Setting
Span Frequency	> 26dB Bandwidth
RBW	Appromiximately 1% of the emission bandwidth
VBW	> RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For UNII-3:

Spectrum Parameter	Setting
Span Frequency	> 6dB Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For 99% Occupied Bandwidth:


Spectrum Parameter	Setting
Span Frequency	1.5 times to 5 times the OBW
RBW	1% to 5% of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- c. Measured the spectrum width with power higher than 26dB / 6dB below carrier.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

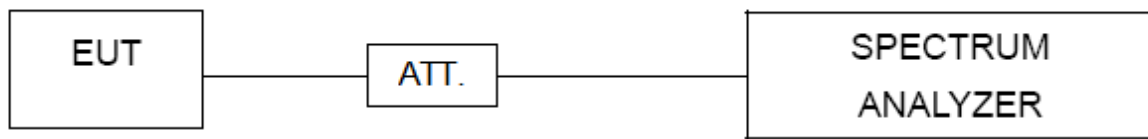

6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX E.

7. MAXIMUM OUTPUT POWER

7.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	Maximum Output Power	AP device:1 Watt (30dBm) Client device: 250mW (23.98dBm)	5150-5250
		250mW (23.98dBm)	5250-5350
		250mW (23.98dBm)	5470-5725
		1 Watt (30dBm)	5725-5850

Note:

- For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log B, where B is the 26dB Bandwidth in megahertz.


7.2 TEST PROCEDURE

- The EUT was directly connected to the peak power analyzer and antenna output port as show in the block diagram below.
- The test was performed in accordance with method of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

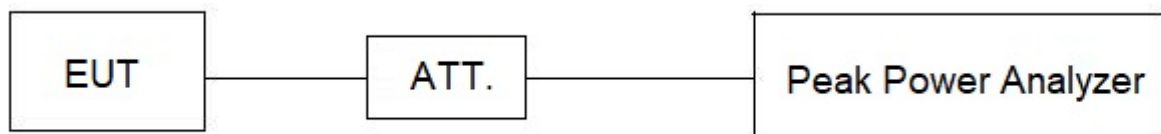

7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX F.

8. POWER SPECTRAL DENSITY

8.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	Power Spectral Density	AP device:17dBm/MHz Client device:11dBm/MHz	5150-5250
		11dBm/MHz	5250-5350
		11dBm/MHz	5470-5725
		30dBm/500kHz	5725-5850

8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:
For UNII-1, UNII-2A, UNII-2C:

Spectrum Parameter	Setting
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1MHz.
VBW	3MHz.
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

For UNII-3:

Spectrum Parameter	Setting
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	100 kHz.
VBW	300 kHz.
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

Note:

- For UNII-3, according to KDB publication 789033 D02 General UNII Test Procedures New Rules v02r01, section II.F.5., it is acceptable to set RBW at 100kHz and VBW at 300kHz if the spectrum analyzer does not have 500kHz RBW. Then, add $10 \log (500 \text{ kHz}/100 \text{ kHz})$ to the measured result, i.e. 7 dB.
- During the test of U-NII 3 PSD, the measurement result with RBW=100kHz has been added 7 dB by compensating offset. For example, the cable loss is 16.3 dB, and the final offset is $16.3 + 7 = 23.3 \text{ dB}$ when RBW=100kHz is used.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX G.

9. FREQUENCY STABILITY

9.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(g)	Frequency Stability	An emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.	5150-5250
			5250-5350
			5470-5725
			5725-5850

9.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting:


Spectrum Parameter	Setting
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- c. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
- d. User manual temperature is 0°C~40°C.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP

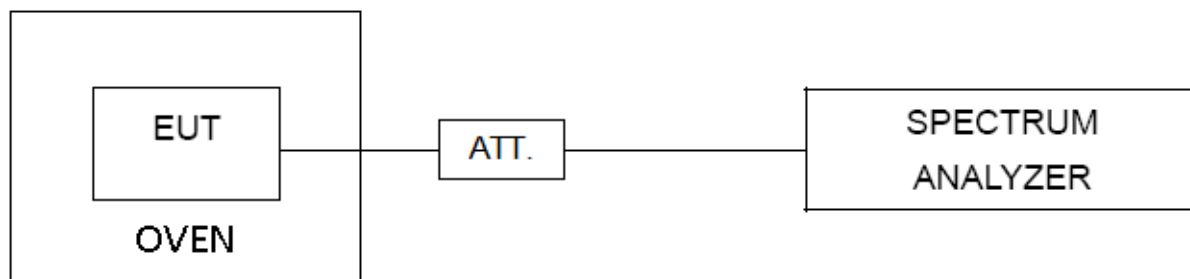

9.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

9.6 TEST RESULTS

Please refer to the APPENDIX H.

10. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI TEST RECEIVER	R&S	ESCI	100382	Dec. 22, 2024
2	TWO-LINE V-NETWORK	R&S	ENV216	101447	Dec. 22, 2024
3	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
4	Cable	N/A	SFT205-NMNM-9M-001	9M	Nov. 27, 2024
5	643 Shield Room	ETS	6*4*3	N/A	N/A

Radiated Emissions - 9 kHzto 30MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Active Loop Antenna	Schwarzbeck	FMZB 1513-60B	1513-60 B-034	Mar. 30, 2025
2	MXE EMI Receiver	Keysight	N9038A	MY56400091	Dec. 22, 2024
3	Cable	N/A	RW4950-3.8A-NMS M-1.5	N/A	Nov. 12, 2025
4	Cable	N/A	LMR400-NMNM-8 M	N/A	Nov. 12, 2025
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	966 Chamber room	ETS	9*6*6	N/A	May 16, 2025

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	1462	Dec. 13, 2024
2	Attenuator	EMC INSTRUMENT	EMCI-N-6-06	AT-06009	Dec. 13, 2024
3	Preamplifier	EMC INSTRUMENT	EMC001330	980998	Nov. 17, 2024
4	Cable	RegalWay	LMR400-NMNM-12 .5m	N/A	Jun. 06, 2025
5	Cable	RegalWay	LMR400-NMNM-3 m	N/A	Jun. 06, 2025
6	Cable	RegalWay	LMR400-NMNM-0. 5m	N/A	Jun. 06, 2025
7	Receiver	Agilent	N9038A	MY52130039	Dec. 22, 2024
8	Positioning Controller	MF	MF-7802	N/A	N/A
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	966 Chamber room	CM	9*6*6	N/A	May 16, 2025

Radiated Emissions - 1GHz to 18GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Receiver	Agilent	N9038A	MY52130039	Dec. 22, 2024
2	Preamplifier	EMC INSTRUMENT	EMC118A45SE	980888	Nov. 17, 2024
3	Double Ridged Guide Antenna	ETS	3115	75789	Jun. 15, 2025
4	Cable	RegalWay	RWLP50-4.0A-SMSM-12.5M	N/A	Jul. 03, 2025
5	Cable	RegalWay	RWLP50-4.0A-NMRA SM-2.5M	N/A	Jul. 03, 2025
6	Cable	RegalWay	RWLP50-4.0A-NMRA SMRA-0.8M	N/A	Jul. 03, 2025
7	966 Chamber room	CM	9*6*6	N/A	May 19, 2025
8	Filter	STI	STI15-9969	N/A	May 31, 2025
9	Attenuator	Talent Microwave	TA10A2-S-18	N/A	N/A
10	Positioning Controller	MF	MF-7802	N/A	N/A
11	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - Above 18GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EXA Signal Analyzer	Keysight	N9010A	MY56480488	Dec. 22, 2024
2	Low Noise Amplifier	CONNPHY	CLN-18G40G-4330-K	619413	Jul. 17, 2025
3	Cable	RegalWay	RWLP50-2.6A-2.92 M2.92M-1.1M	N/A	Jul. 25, 2025
4	Cable	Tonscend	HF160-KMKM-3M	N/A	Jul. 25, 2025
5	Broad-Band Horn Antenna	Schwarzbeck	BBHA9170(3m)	9170-319	Jun. 16, 2025
6	966 Chamber room	CM	9*6*6	N/A	May 19, 2025
7	Positioning Controller	MF	MF-7802	N/A	N/A
8	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Bandwidth& Power Spectral Density					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	May 31, 2025
2	Measurement Software	BTL	BTL Conducted Test	N/A	N/A
3	Isolation attenuator	Z-Link	ASMA-16-18-2W	N/A	N/A
4	EXA Spectrum Analyzer	Keysight	N9010A	MY55150209	Aug. 20, 2025


Maximum Output Power					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Peak Power Analyzer	Keysight	8990B	MY51000506	May 31, 2025
2	Wideband power sensor	Keysight	N1923A	MY58310004	May 31, 2025
3	Isolation attenuator	Z-Link	ASMA-10-18-2W	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.



11. EUT TEST PHOTOS



AC Power Line Conducted Emissions Test Photos


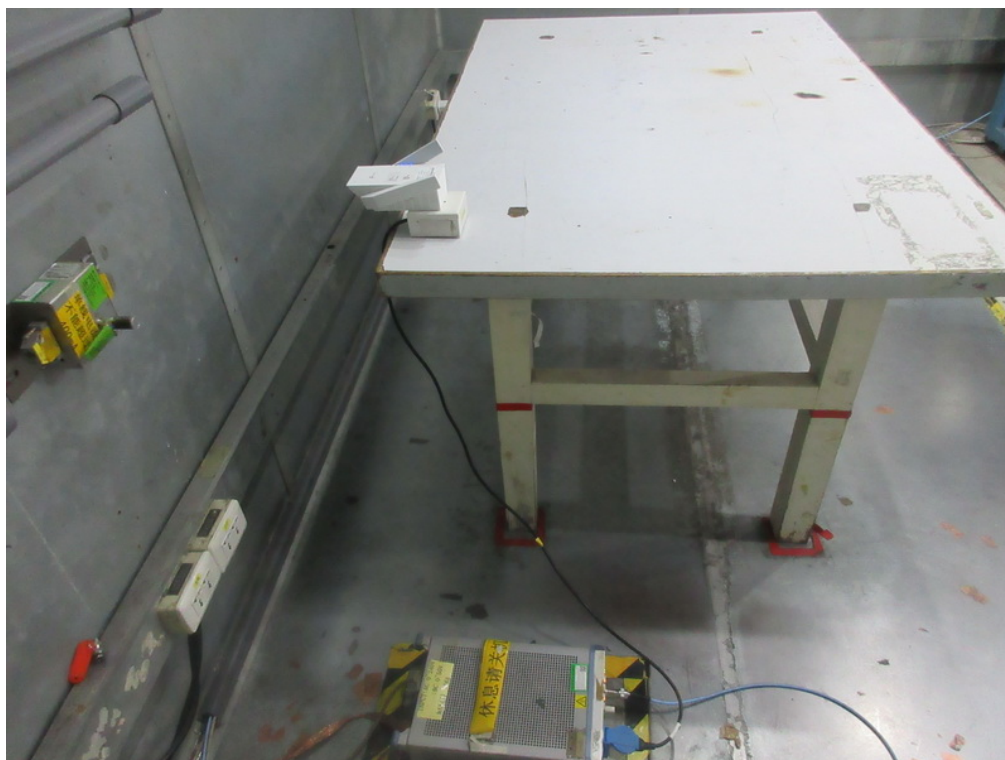


Radiated Emissions Test Photos

9 kHz to 30 MHz

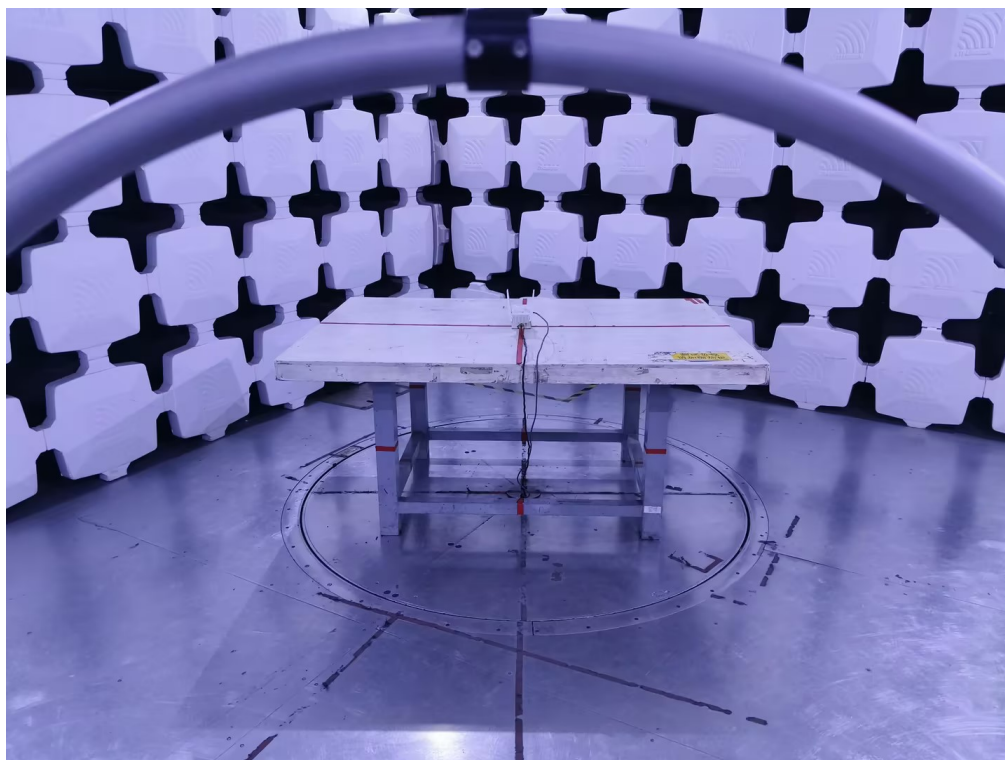
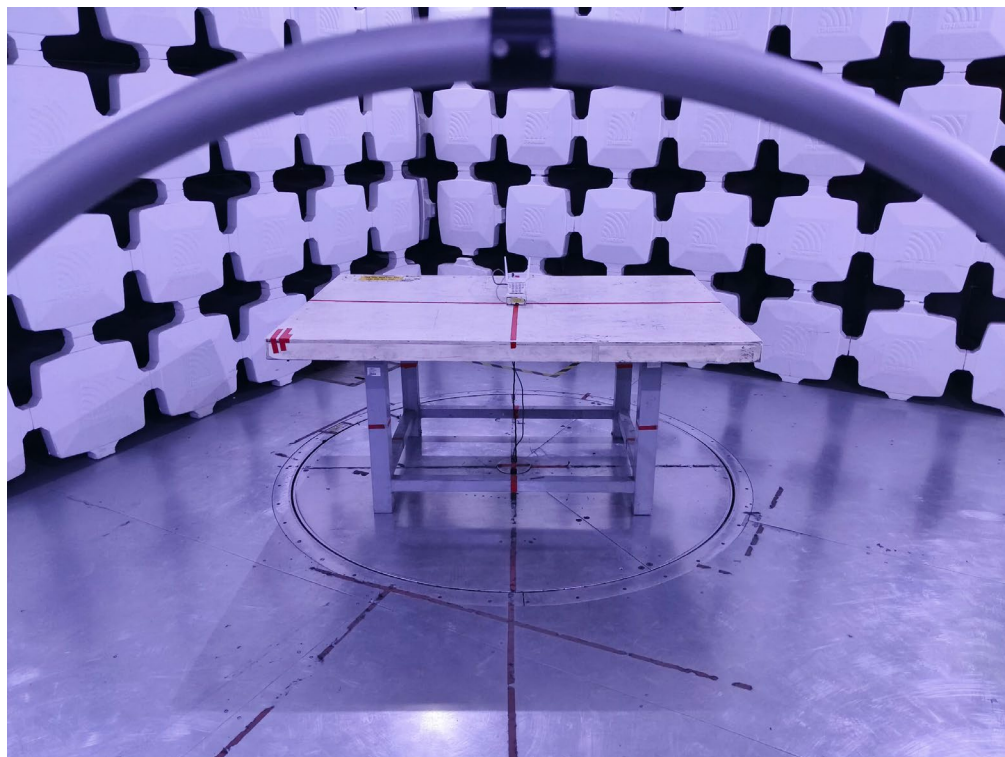


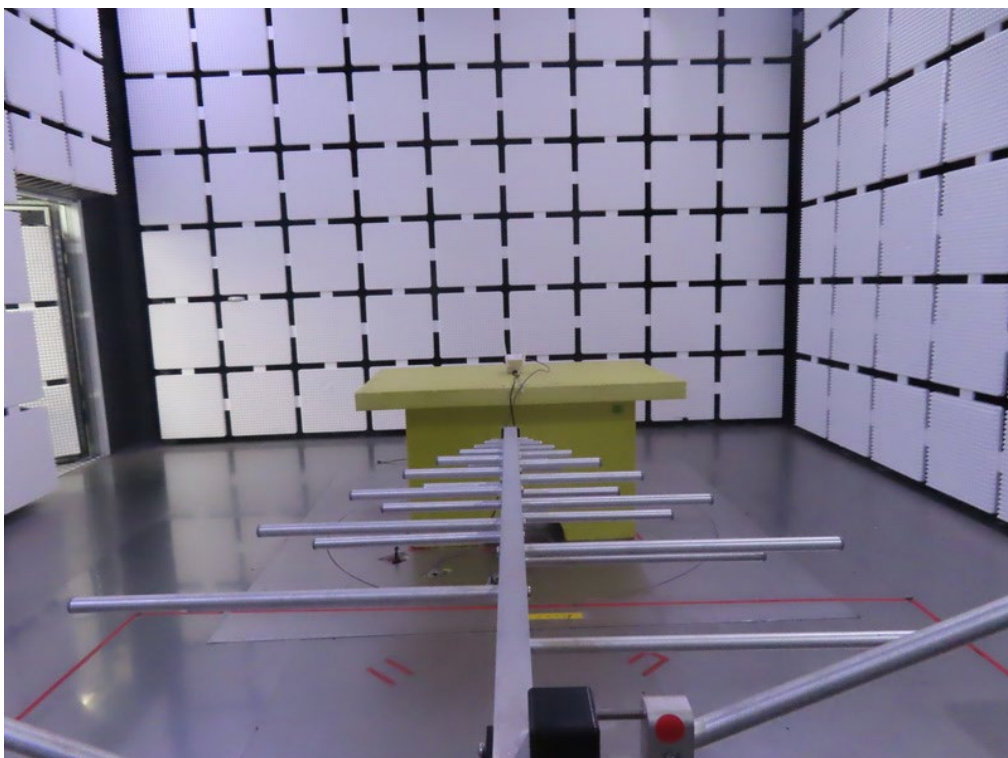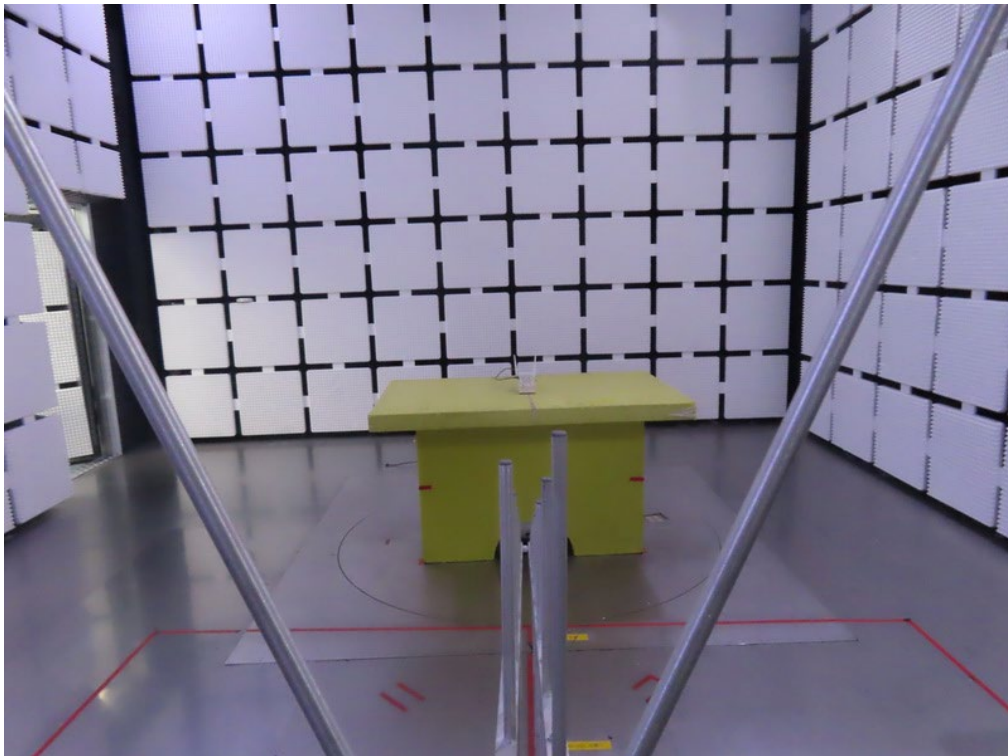Radiated Emissions Test Photos**30 MHz to 1 GHz**

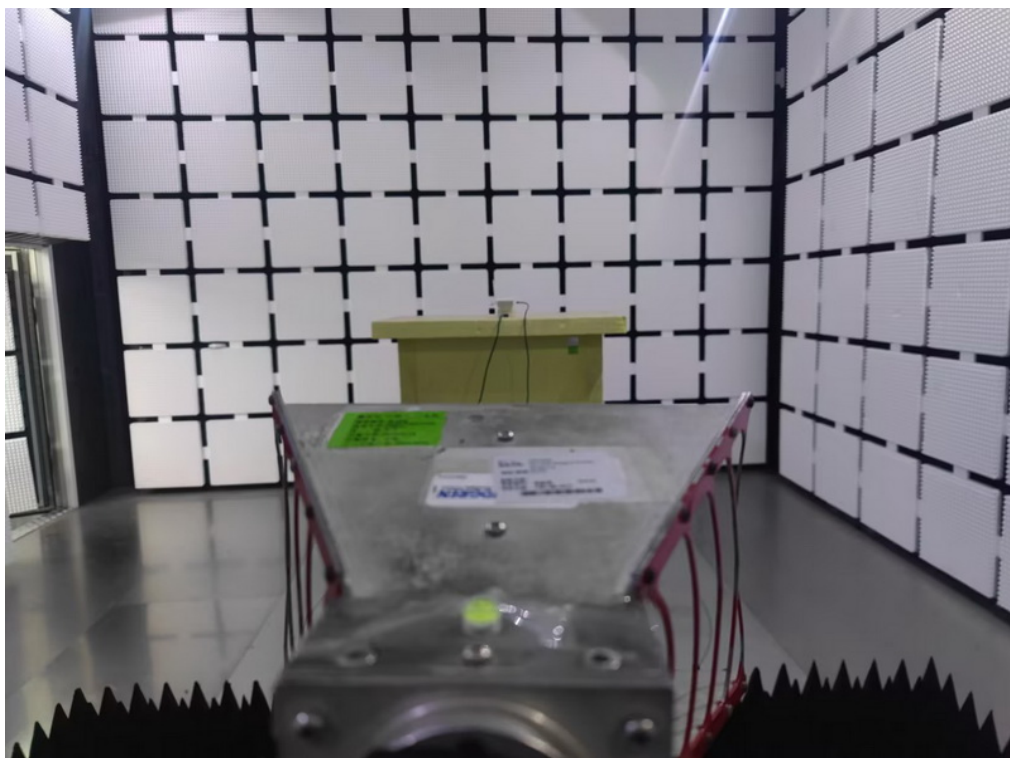
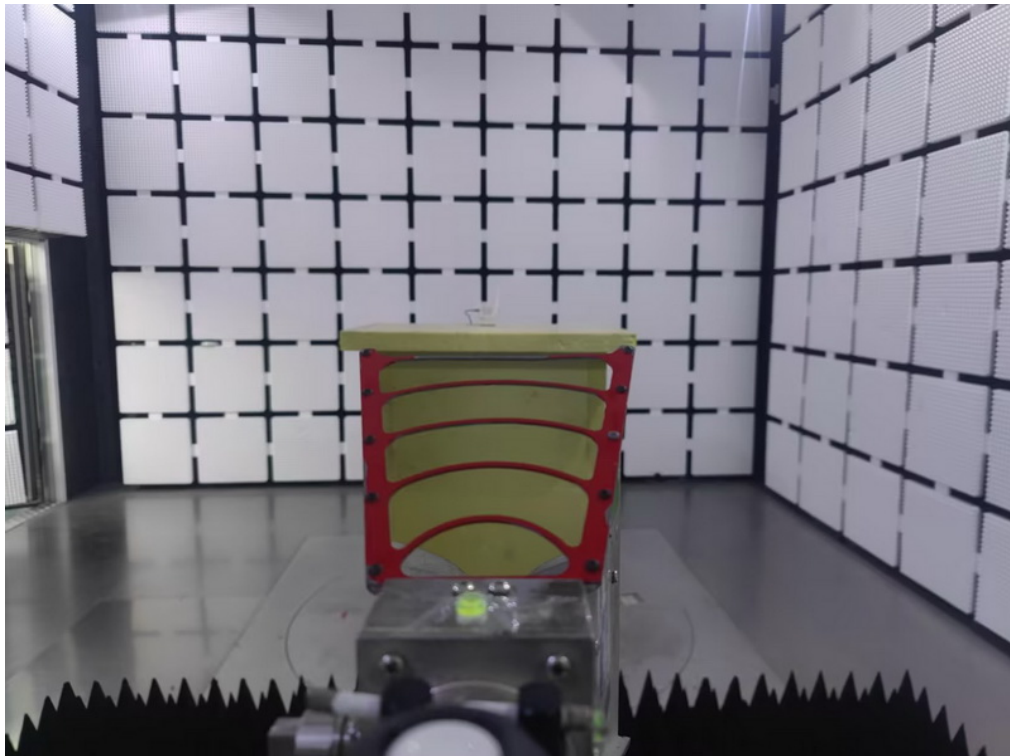
Radiated Emissions Test Photos**Above 1 GHz_ Band edge &Harmonic(1 GHz to 18 GHz)**

Radiated Emissions Test Photos

Above 1 GHz_ Harmonic(18 GHz to 26.5 GHz)

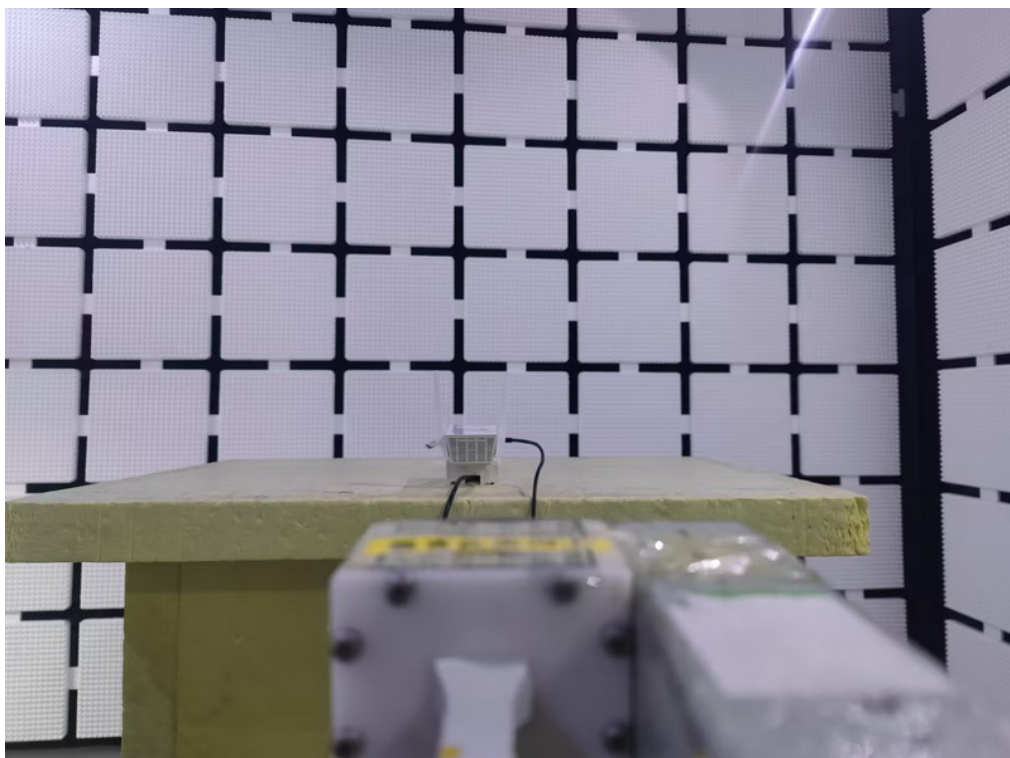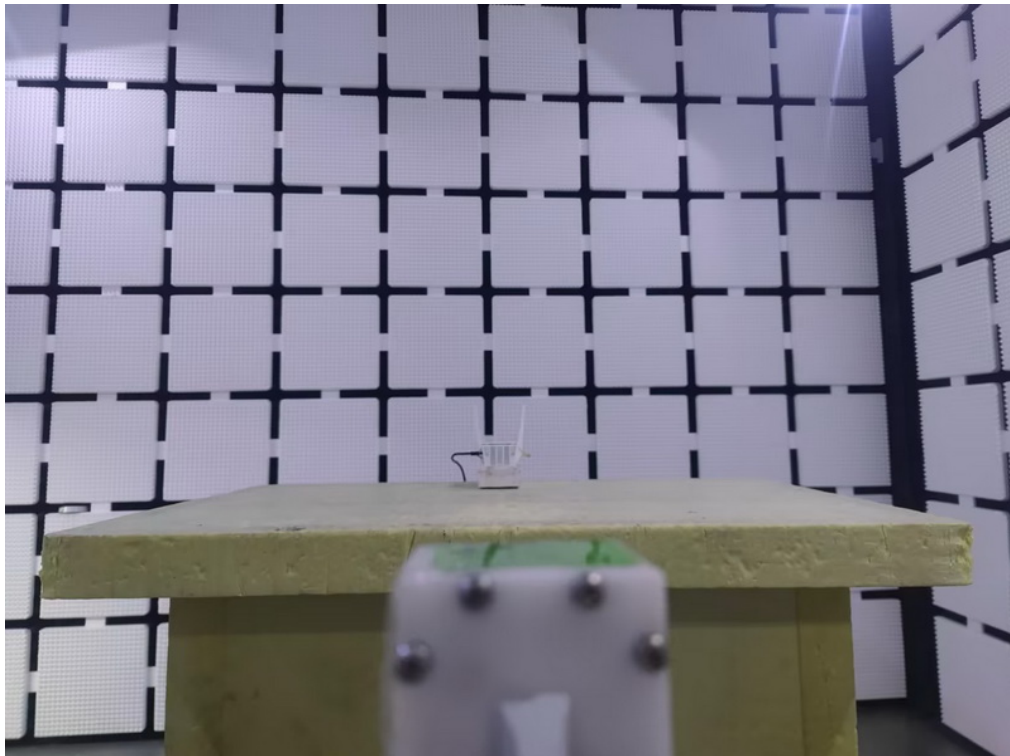


Conducted Test Photos

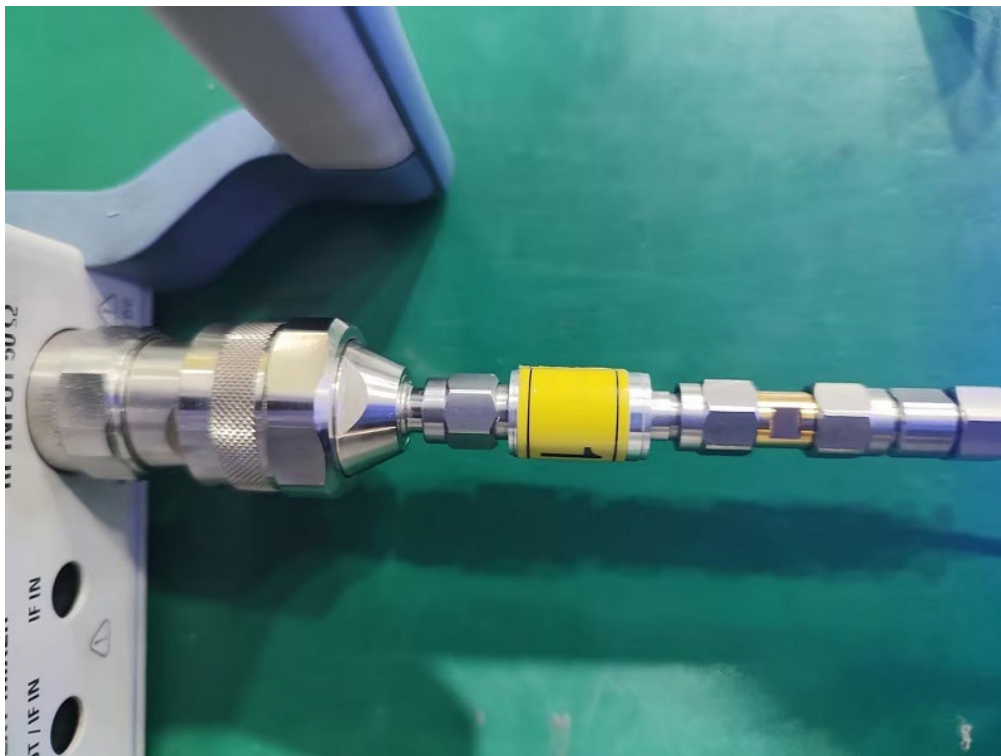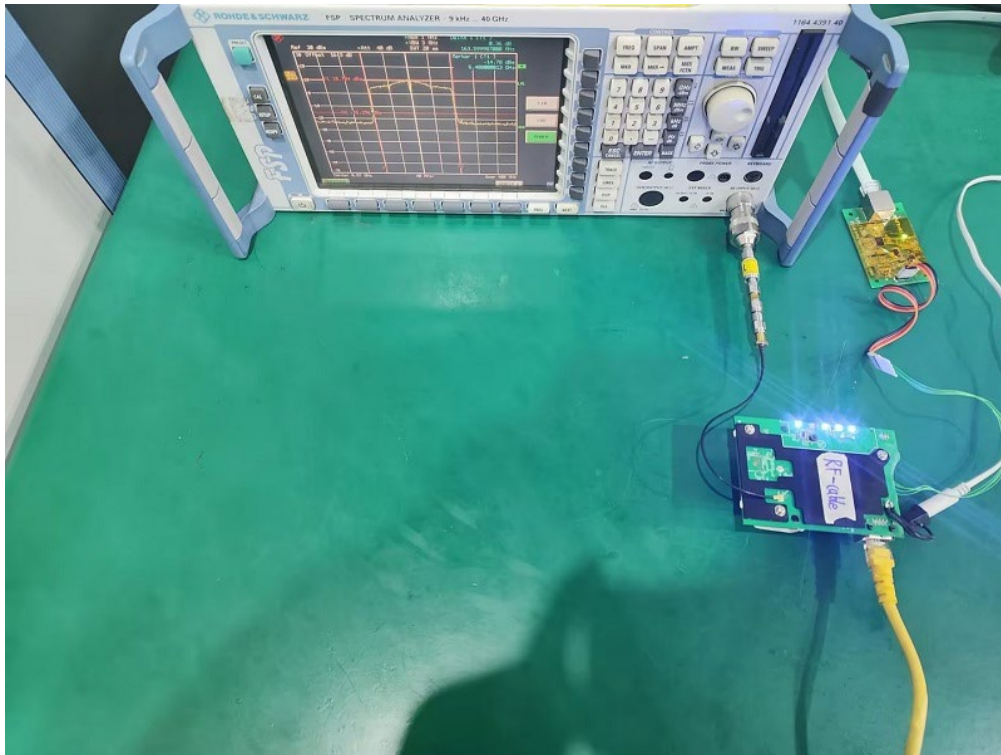

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	TX AC(VHT20) Mode Channel 149 (UNII-3)	Phase	Line
-----------	--	-------	------

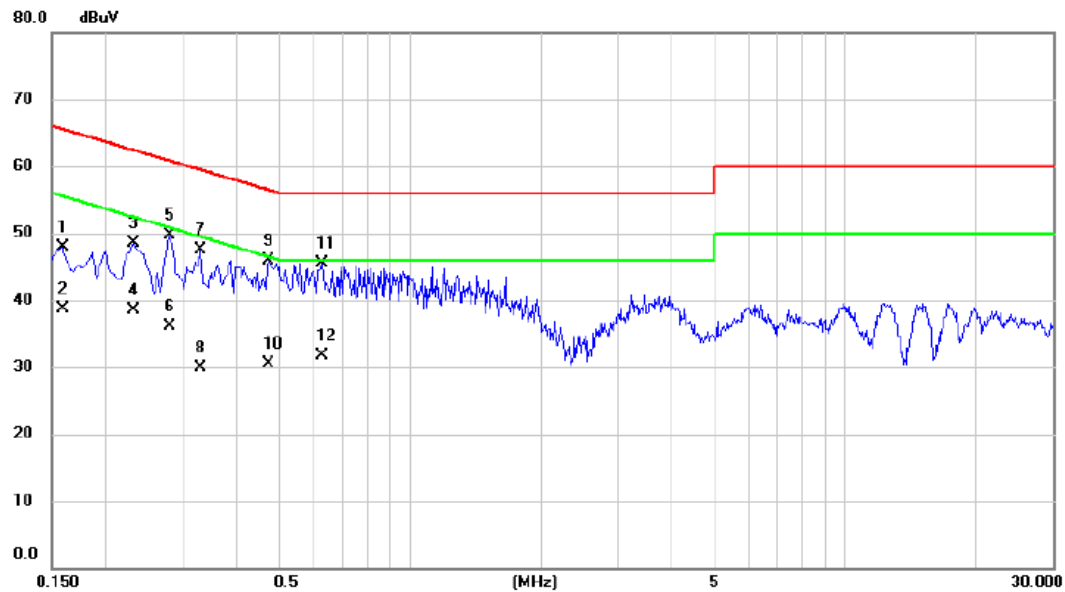


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1590	37.87	9.97	47.84	65.52	-17.68	QP	
2		0.1590	28.80	9.97	38.77	55.52	-16.75	AVG	
3		0.2310	38.45	10.03	48.48	62.41	-13.93	QP	
4		0.2310	28.40	10.03	38.43	52.41	-13.98	AVG	
5		0.2805	39.65	10.13	49.78	60.80	-11.02	QP	
6		0.2805	25.90	10.13	36.03	50.80	-14.77	AVG	
7		0.3300	37.24	10.24	47.48	59.45	-11.97	QP	
8		0.3300	19.60	10.24	29.84	49.45	-19.61	AVG	
9		0.4740	35.25	10.57	45.82	56.44	-10.62	QP	
10		0.4740	19.90	10.57	30.47	46.44	-15.97	AVG	
11	*	0.6270	34.60	10.87	45.47	56.00	-10.53	QP	
12		0.6270	20.90	10.87	31.77	46.00	-14.23	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AC(VHT20) Mode Channel 149 (UNII-3)	Phase	Neutral
-----------	--	-------	---------

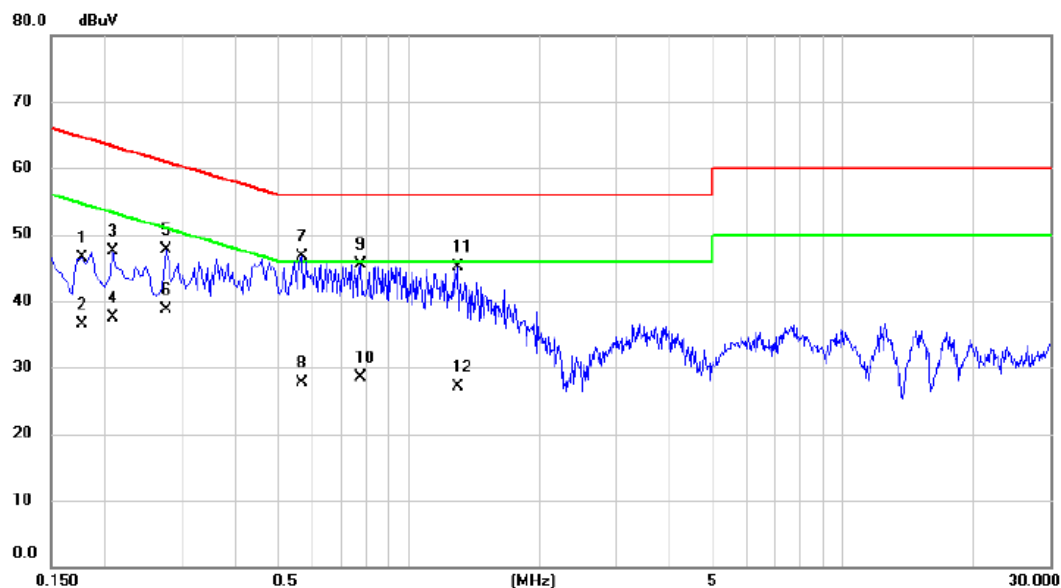

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1770	36.59	9.93	46.52	64.63	-18.11	QP	
2	0.1770	26.50	9.93	36.43	54.63	-18.20	AVG	
3	0.2085	37.53	9.95	47.48	63.26	-15.78	QP	
4	0.2085	27.50	9.95	37.45	53.26	-15.81	AVG	
5	0.2760	37.68	10.08	47.76	60.94	-13.18	QP	
6	0.2760	28.60	10.08	38.68	50.94	-12.26	AVG	
7 *	0.5685	35.88	10.73	46.61	56.00	-9.39	QP	
8	0.5685	16.90	10.73	27.63	46.00	-18.37	AVG	
9	0.7755	34.55	11.03	45.58	56.00	-10.42	QP	
10	0.7755	17.50	11.03	28.53	46.00	-17.47	AVG	
11	1.2975	33.81	11.26	45.07	56.00	-10.93	QP	
12	1.2975	15.80	11.26	27.06	46.00	-18.94	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode	TX AC(VHT20) Mode Channel 149 (UNII-3)	Polarization	Ant 0°
-----------	--	--------------	--------

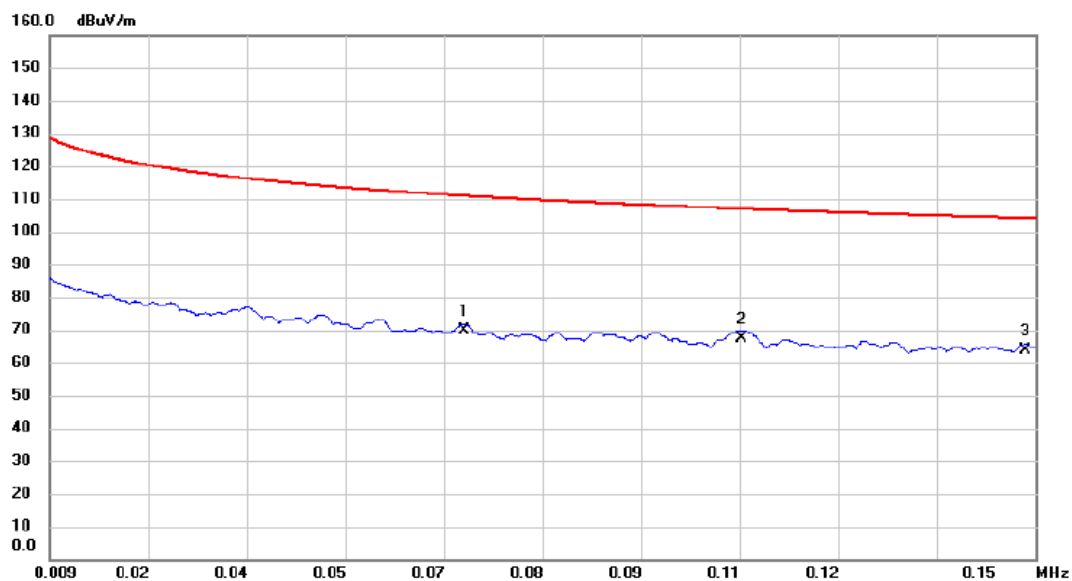


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.0683	48.38	21.30	69.68	110.92	-41.24	AVG	
2	*	0.1080	46.26	21.33	67.59	106.94	-39.35	QP	
3		0.1485	42.53	21.27	63.80	104.17	-40.37	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AC(VHT20) Mode Channel 149 (UNII-3)	Polarization	Ant 0°
-----------	--	--------------	--------

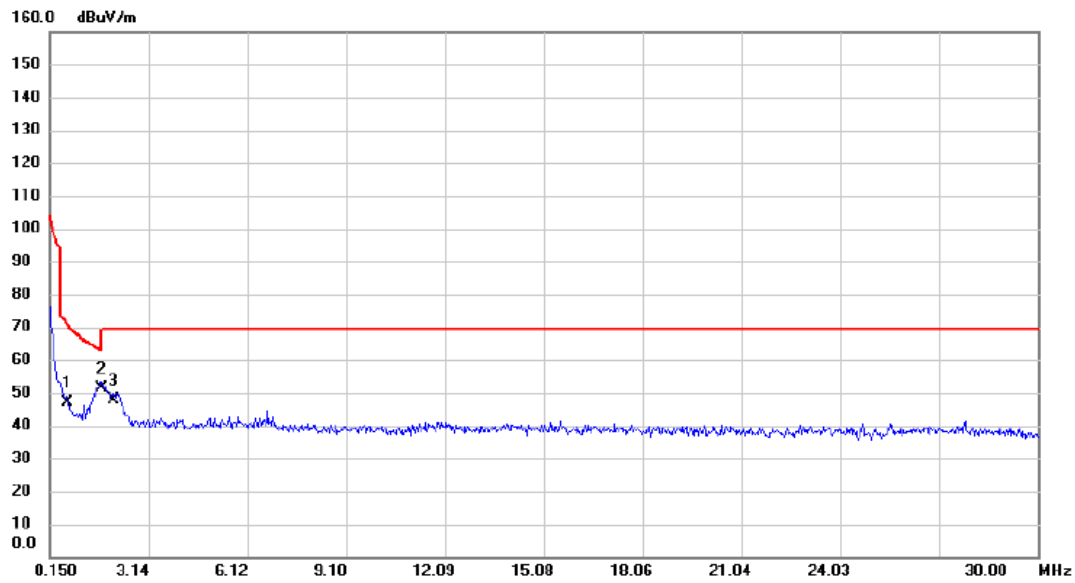


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.6873	25.84	21.12	46.96	70.86	-23.90	QP	
2	*	1.7022	30.28	21.14	51.42	62.98	-11.56	QP	
3		2.0604	26.74	21.11	47.85	69.54	-21.69	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AC(VHT20) Mode Channel 149 (UNII-3)	Polarization	Ant 90°
-----------	--	--------------	---------

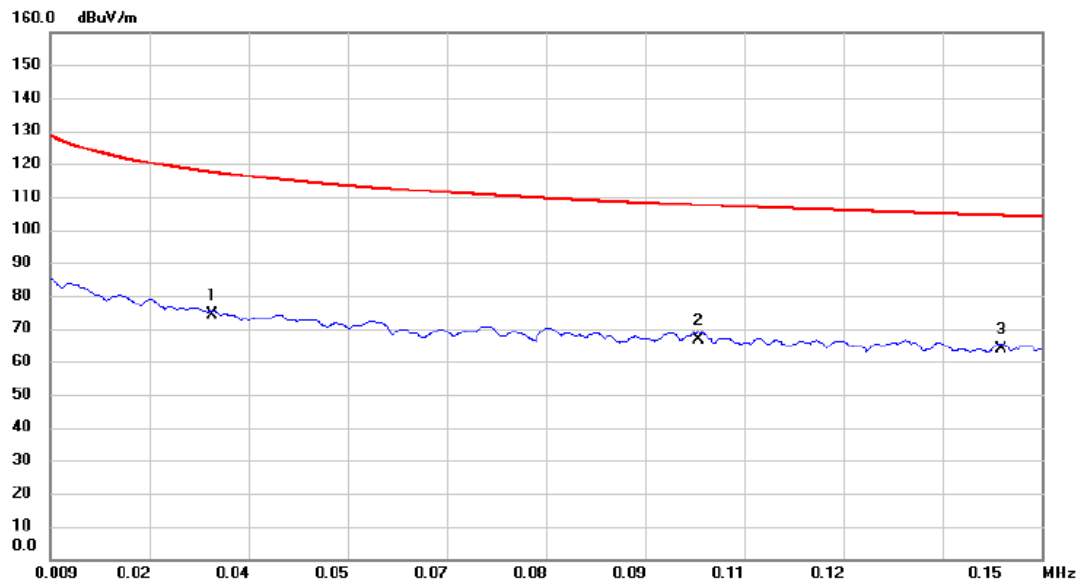


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.0320	52.87	21.15	74.02	117.50	-43.48	AVG	
2		0.1012	45.14	21.34	66.48	107.50	-41.02	QP	
3	*	0.1442	42.45	21.27	63.72	104.43	-40.71	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AC(VHT20) Mode Channel 149 (UNII-3)	Polarization	Ant 90°
-----------	--	--------------	---------

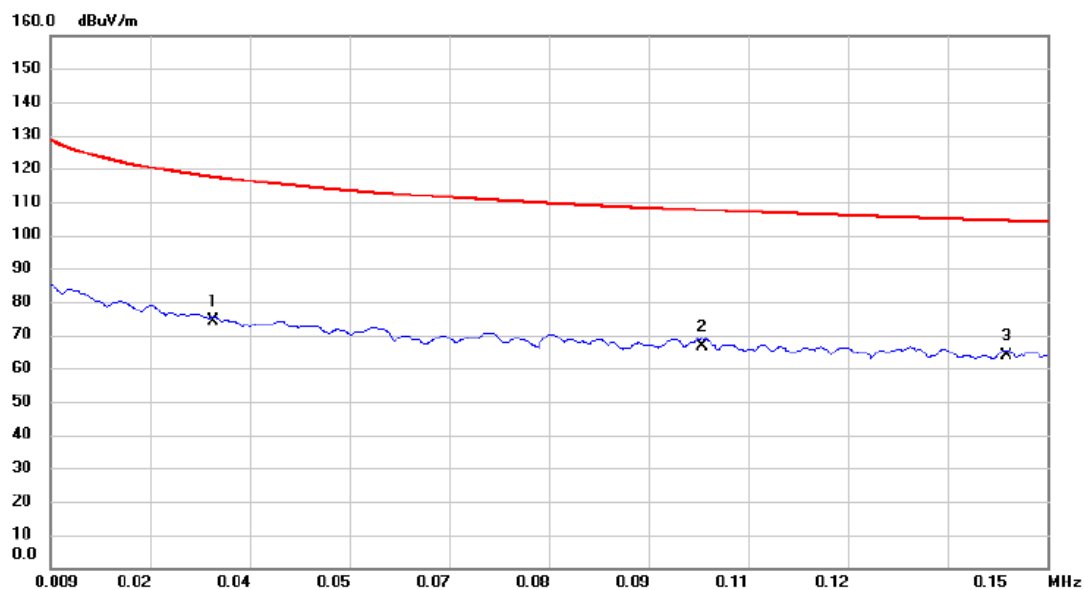

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.0320	52.87	21.15	74.02	117.50	-43.48	AVG	
2		0.1012	45.14	21.34	66.48	107.50	-41.02	QP	
3	*	0.1442	42.45	21.27	63.72	104.43	-40.71	QP	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX AC(VHT20) Mode Channel 149 (UNII-3)	Polarization	Vertical
-----------	--	--------------	----------

80 dBuV/m

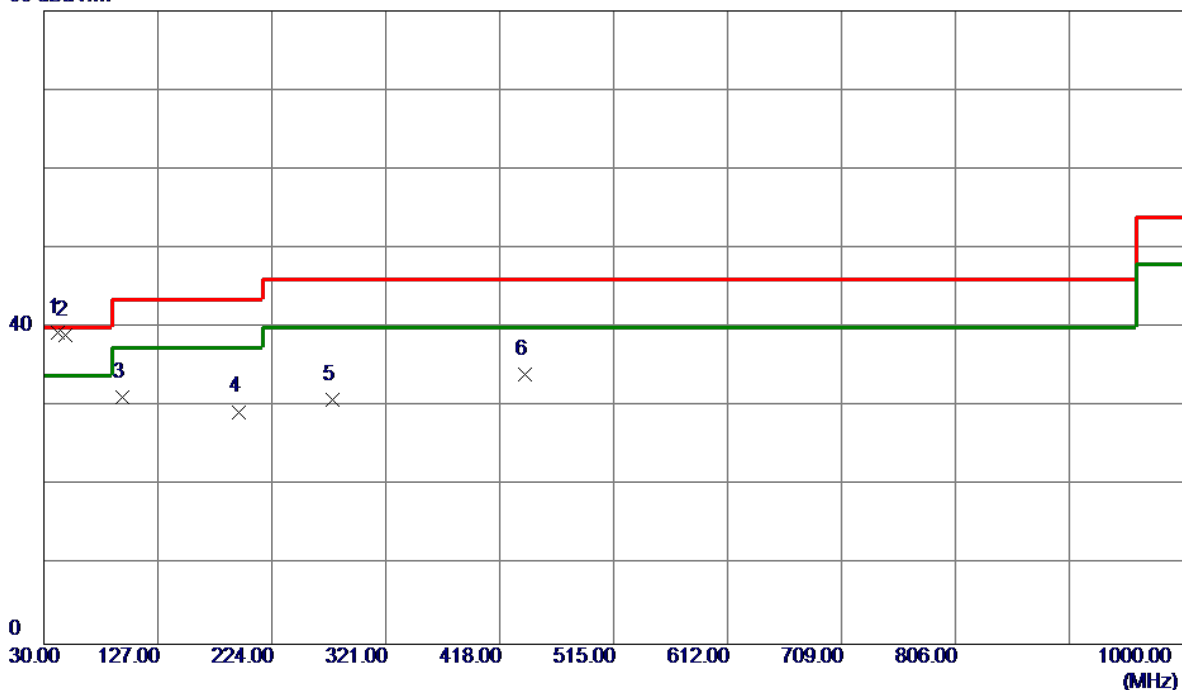


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	41.6400	50.94	-11.60	39.34	40.00	-0.66	Peak	
2	47.9450	50.33	-11.27	39.06	40.00	-0.94	Peak	
3	96.9300	47.57	-16.44	31.13	43.52	-12.39	Peak	
4	195.8700	43.56	-14.20	29.36	43.52	-14.16	Peak	
5	275.8950	42.07	-11.23	30.84	46.02	-15.18	Peak	
6	439.8250	41.06	-7.03	34.03	46.02	-11.99	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AC(VHT20) Mode Channel 149 (UNII-3)	Polarization	Horizontal
-----------	--	--------------	------------

80 dBuV/m

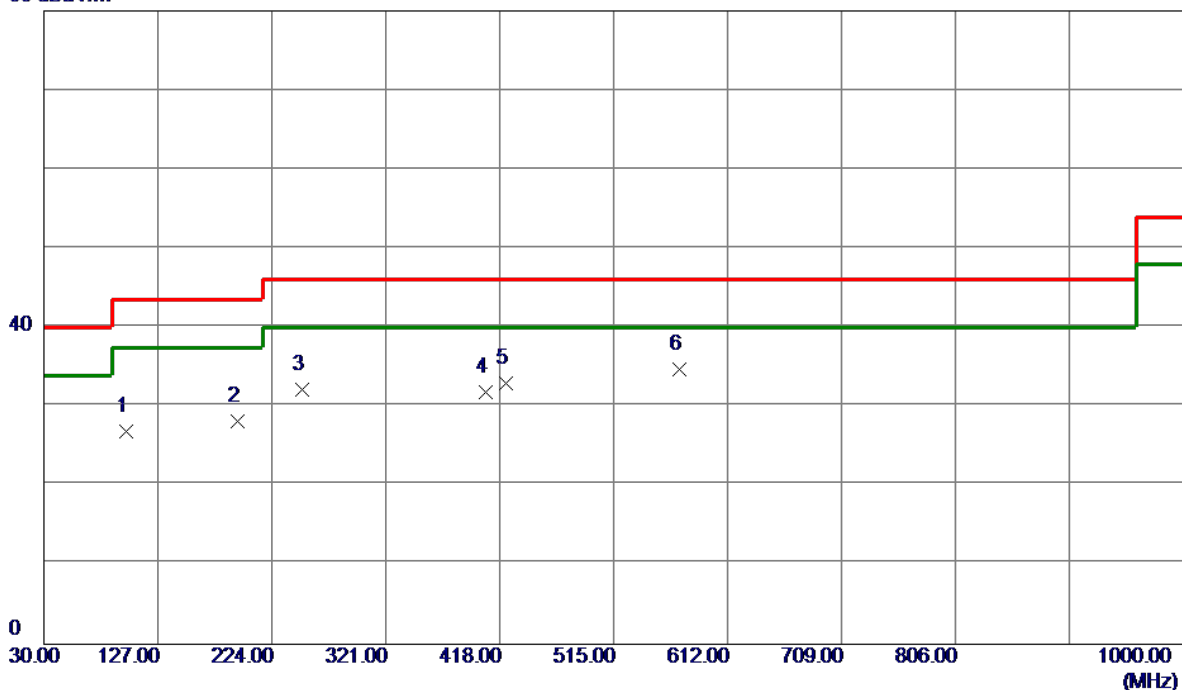

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	99.8399	42.80	-15.95	26.85	43.52	-16.67	Peak	
2	195.3850	42.28	-14.17	28.11	43.52	-15.41	Peak	
3	250.1900	44.44	-12.35	32.09	46.02	-13.93	Peak	
4	405.8750	39.68	-7.89	31.79	46.02	-14.23	Peak	
5	422.8500	40.39	-7.46	32.93	46.02	-13.09	Peak	
6 *	571.2600	39.08	-4.40	34.68	46.02	-11.34	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

130 dBuV/m

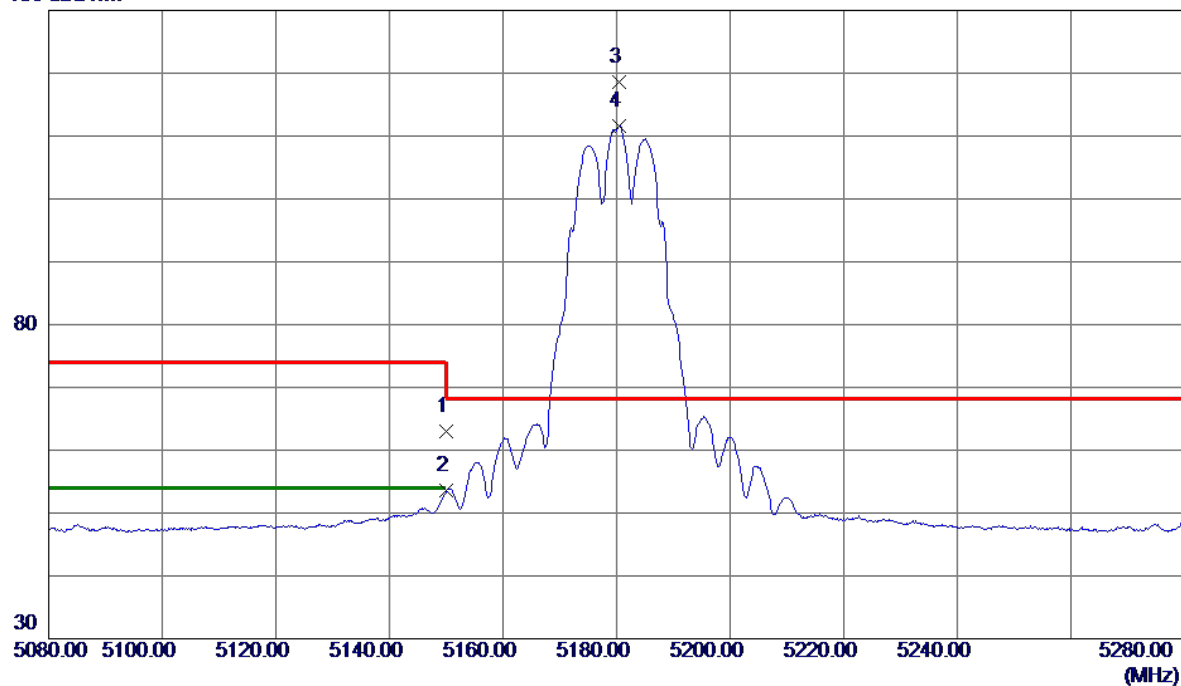


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	49.48	13.56	63.04	74.00	-10.96	Peak	
2	5150.0000	40.00	13.56	53.56	54.00	-0.44	AVG	
3 *	5180.5000	105.02	13.62	118.64	68.20	50.44	Peak	No Limit
4	5180.5000	98.03	13.62	111.65	999.00	-887.35	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

100 dBuV/m

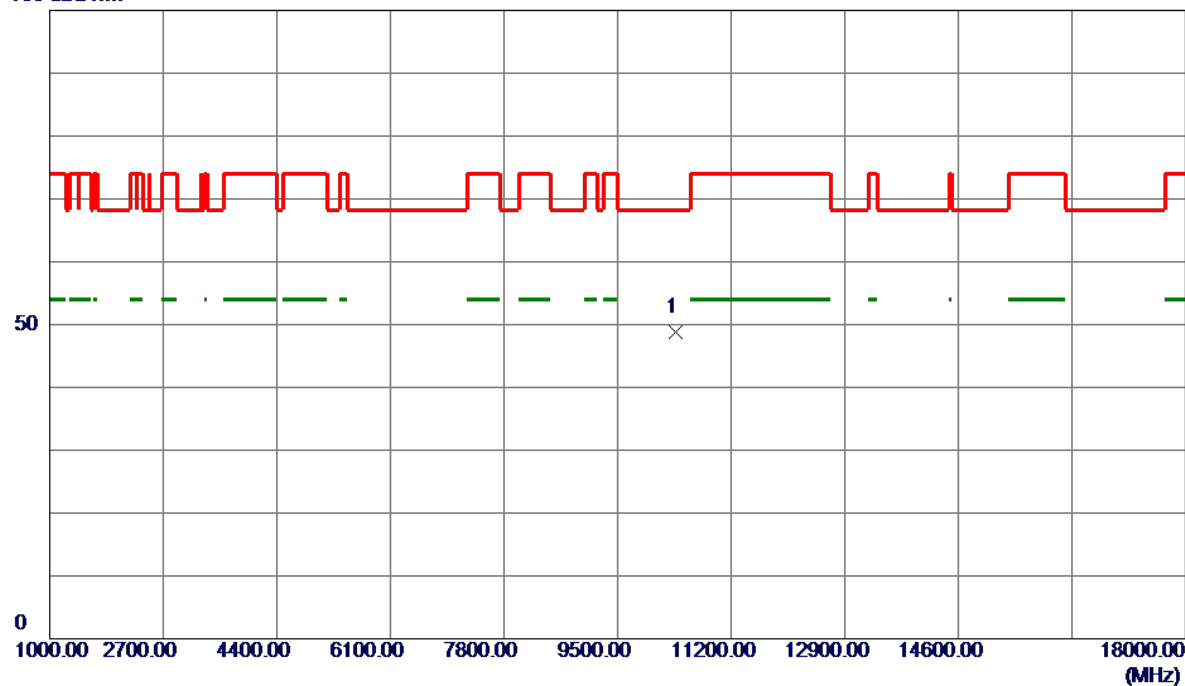


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10360.8500	39.74	9.13	48.87	68.20	-19.33	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

130 dBuV/m

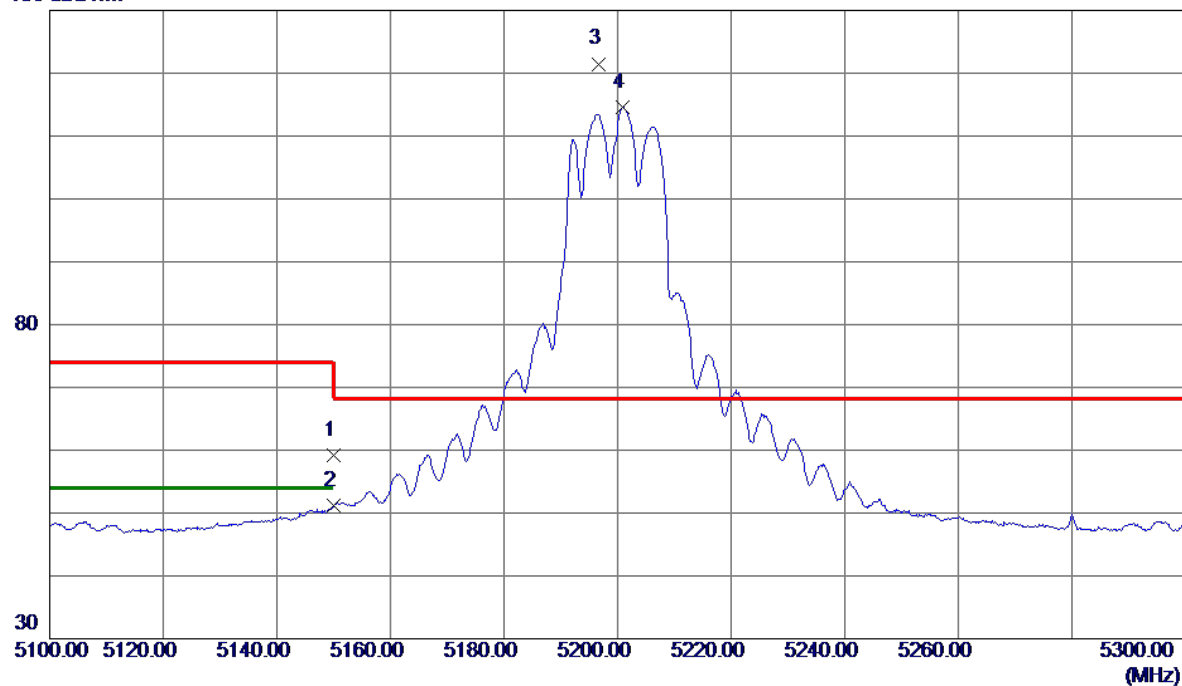


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	45.58	13.56	59.14	74.00	-14.86	Peak	
2	5150.0000	37.60	13.56	51.16	54.00	-2.84	AVG	
3 *	5196.7000	107.84	13.66	121.50	68.20	53.30	Peak	No Limit
4	5200.9000	100.96	13.67	114.63	999.00	-884.37	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

100 dBuV/m

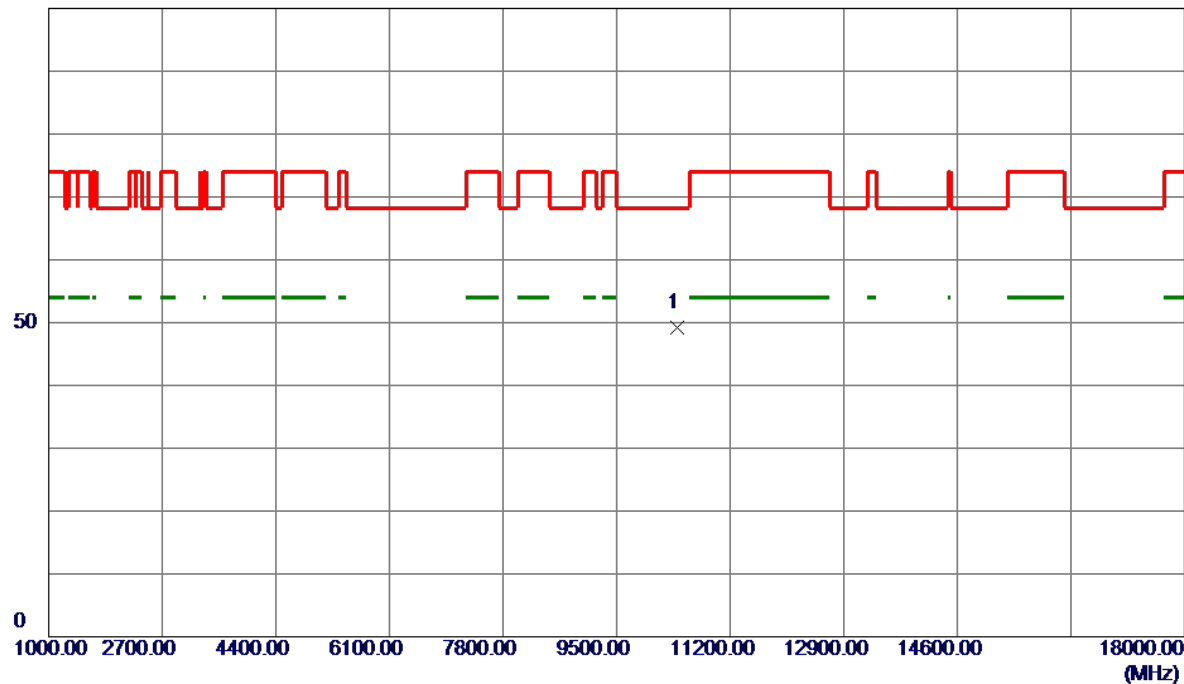


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10405.4000	40.03	9.18	49.21	68.20	-18.99	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5240 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

100 dBuV/m

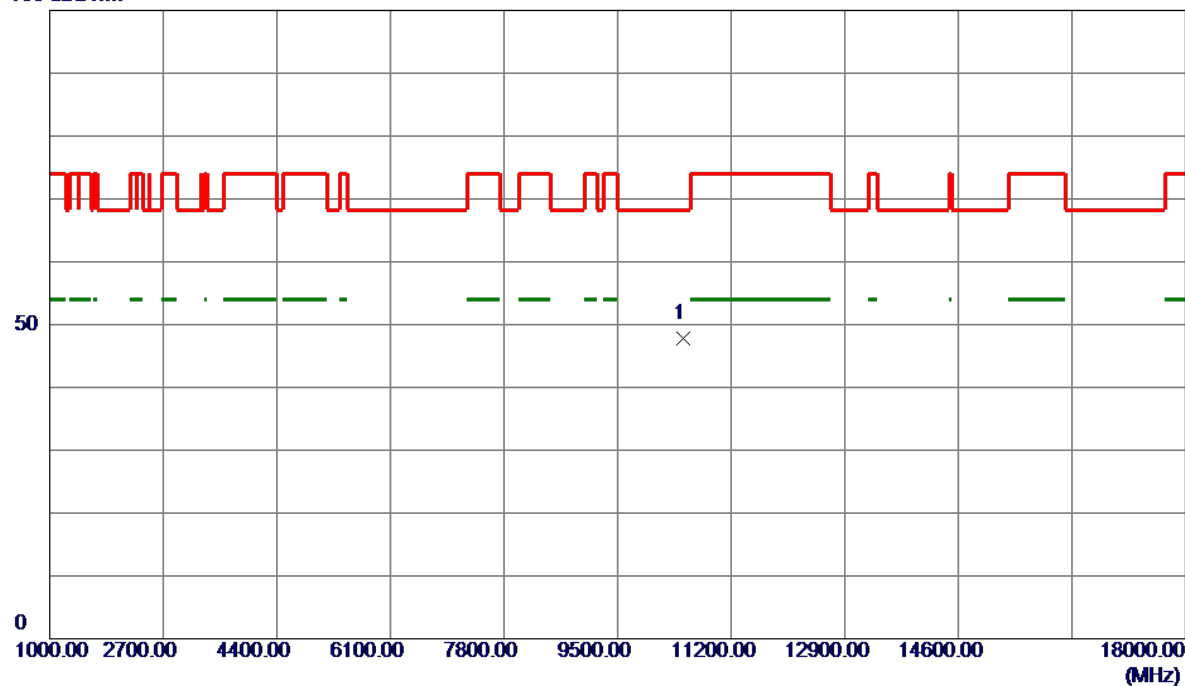


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10479.8000	38.58	9.27	47.85	68.20	-20.35	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5180 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

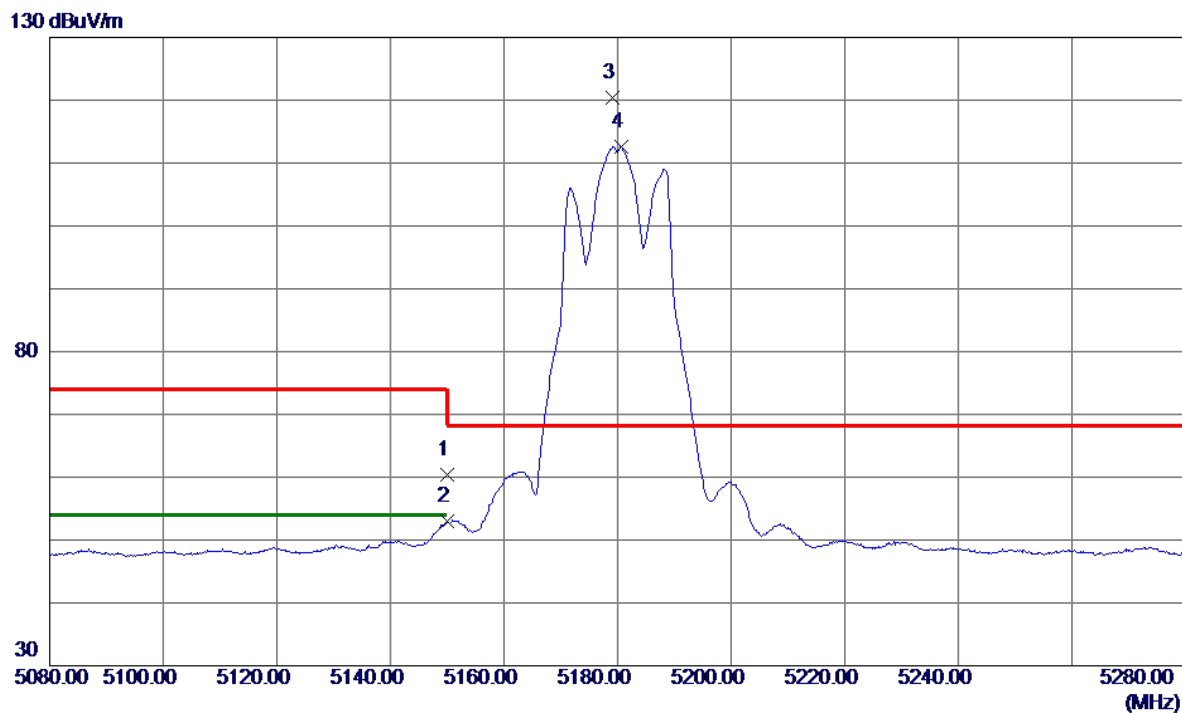


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	46.80	13.56	60.36	74.00	-13.64	Peak	
2	5150.0000	39.35	13.56	52.91	54.00	-1.09	AVG	
3 *	5179.2000	106.78	13.62	120.40	68.20	52.20	Peak	No Limit
4	5180.6000	99.01	13.62	112.63	999.00	-886.37	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5180 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

100 dBuV/m

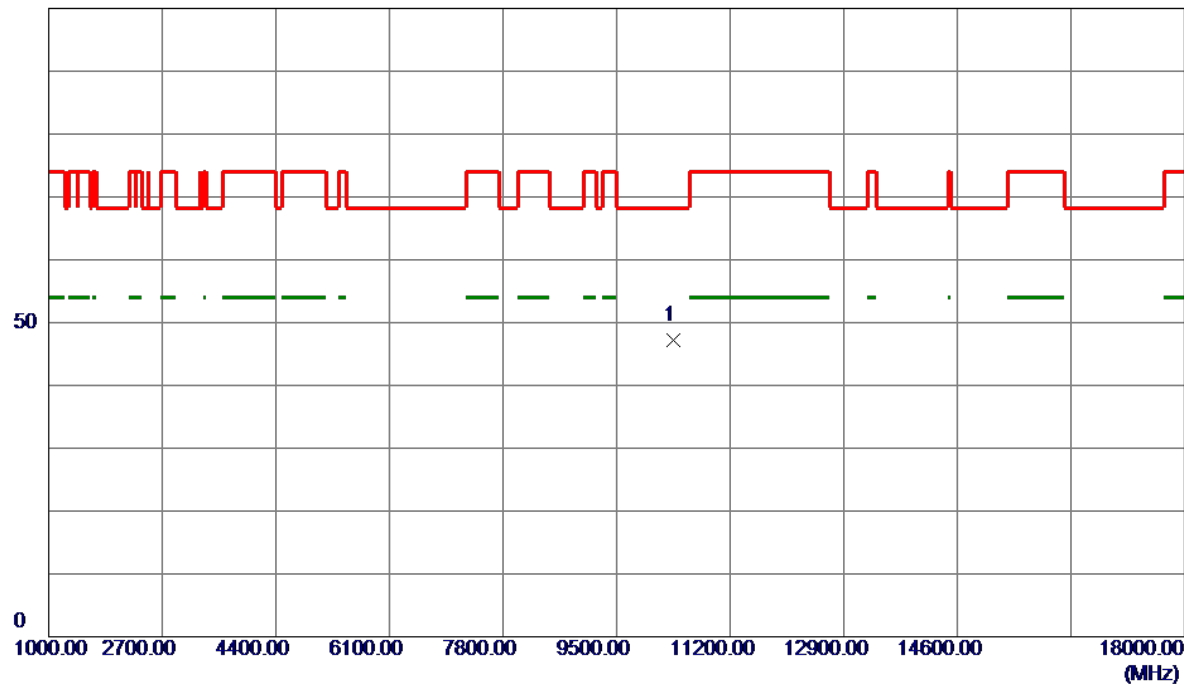


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10354.4500	38.04	9.12	47.16	68.20	-21.04	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5200 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

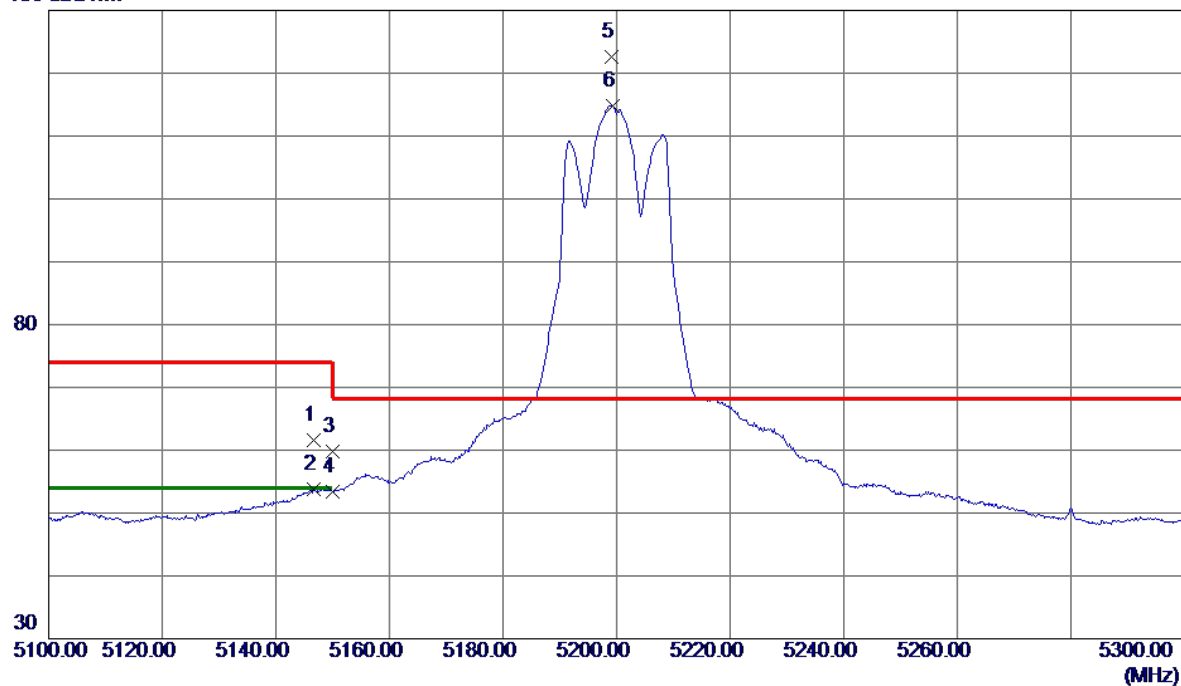


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5146.7000	48.14	13.55	61.69	74.00	-12.31	Peak	
2	5146.7000	40.26	13.55	53.81	54.00	-0.19	AVG	
3	5150.0000	46.29	13.56	59.85	74.00	-14.15	Peak	
4	5150.0000	39.80	13.56	53.36	54.00	-0.64	AVG	
5 *	5199.2000	108.85	13.66	122.51	68.20	54.31	Peak	No Limit
6	5199.3000	101.20	13.66	114.86	999.00	-884.14	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5200 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

100 dBuV/m

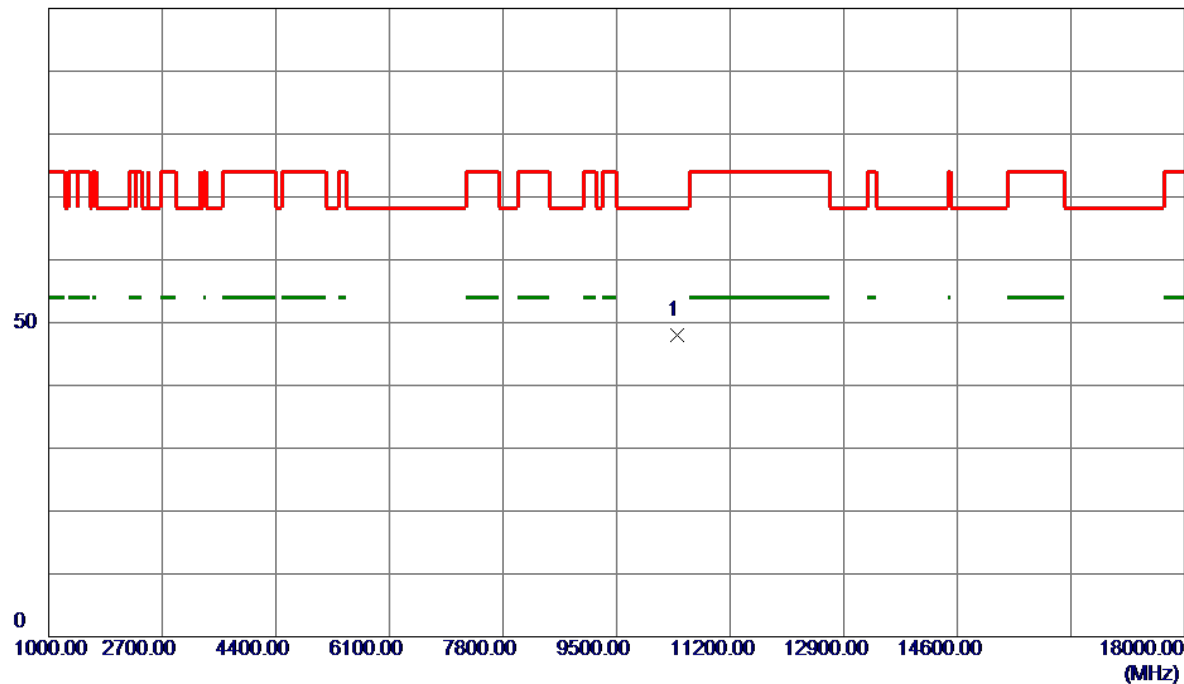


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10401.4500	38.90	9.18	48.08	68.20	-20.12	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5240 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

100 dBuV/m

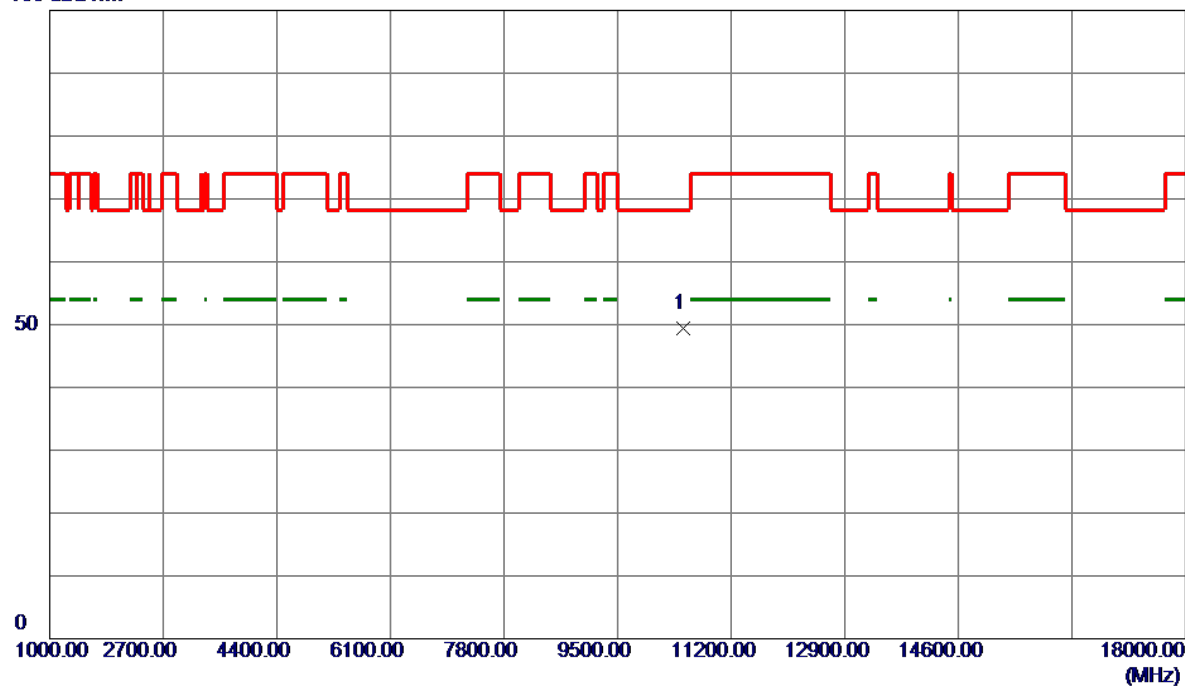


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10480.2000	40.04	9.27	49.31	68.20	-18.89	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5190 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

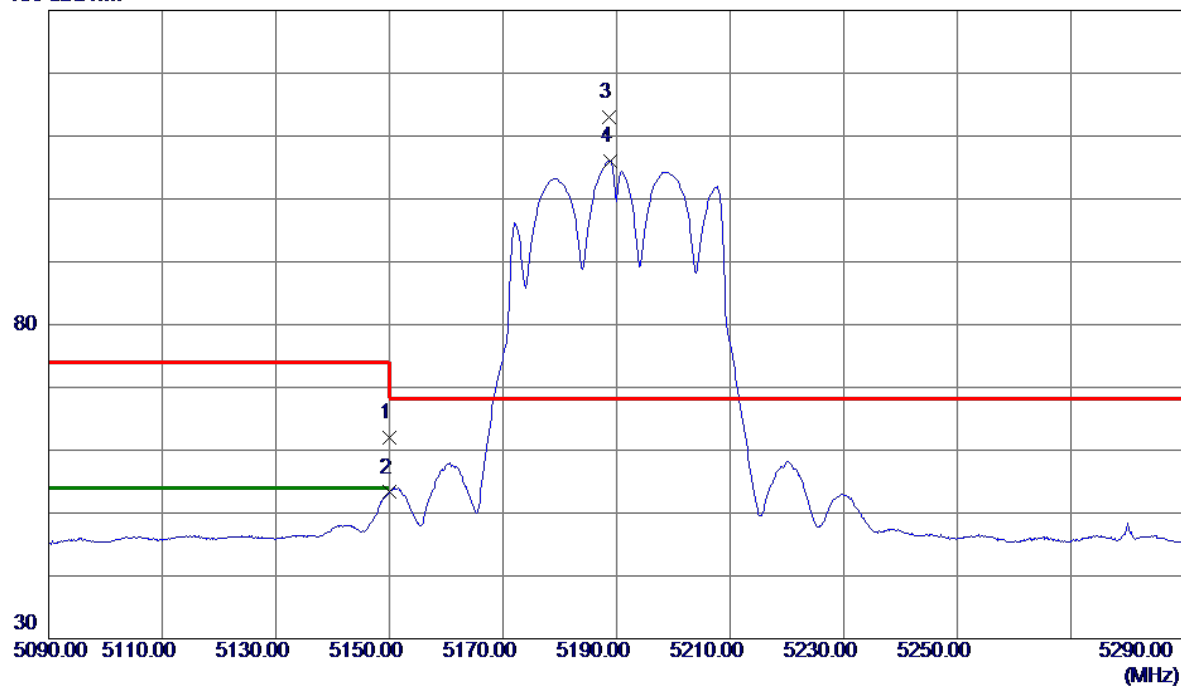


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	48.36	13.56	61.92	74.00	-12.08	Peak	
2	5150.0000	39.74	13.56	53.30	54.00	-0.70	AVG	
3 *	5188.7000	99.27	13.64	112.91	68.20	44.71	Peak	No Limit
4	5188.8000	92.45	13.64	106.09	999.00	-892.91	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5190 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

100 dBuV/m

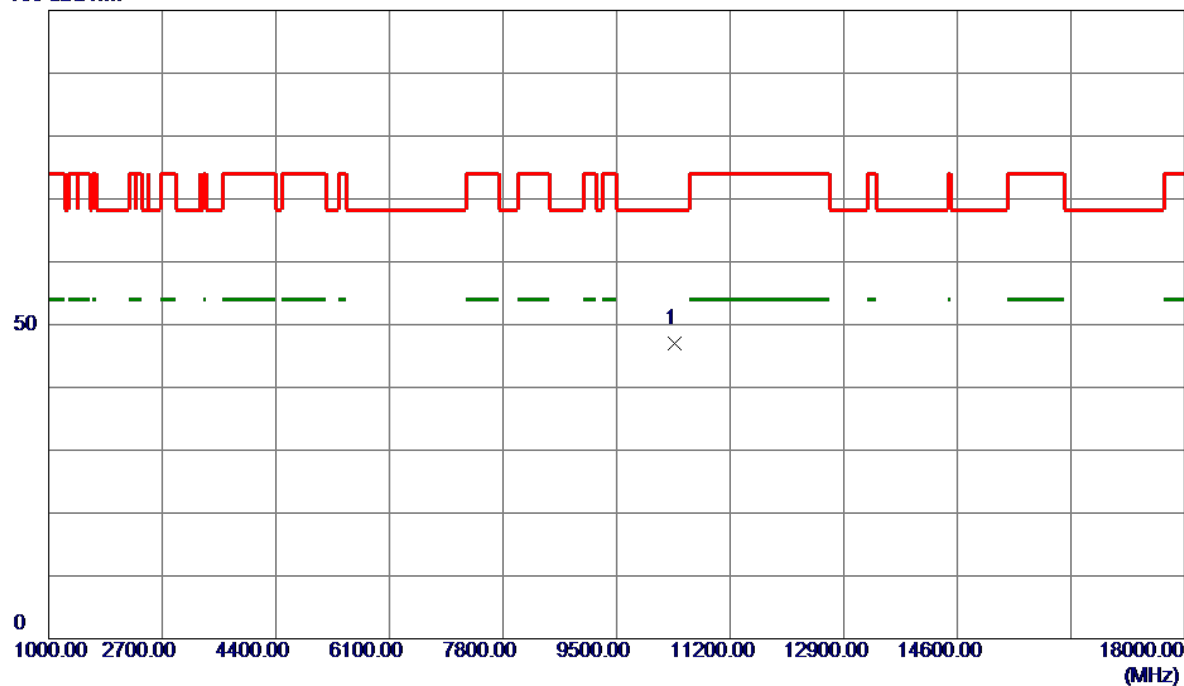


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10372.1000	37.87	9.14	47.01	68.20	-21.19	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5230 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

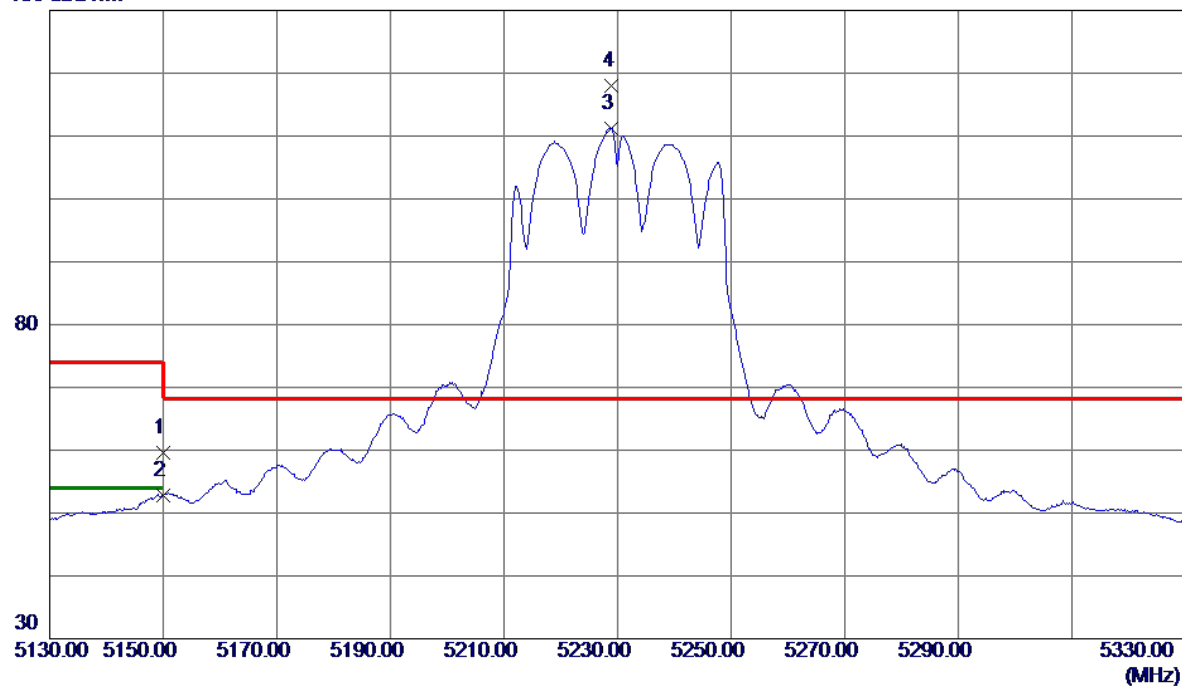


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	46.13	13.56	59.69	74.00	-14.31	Peak	
2	5150.0000	39.30	13.56	52.86	54.00	-1.14	AVG	
3	5228.8000	97.56	13.72	111.28	999.00	-887.72	AVG	No Limit
4 *	5229.0000	104.33	13.72	118.05	68.20	49.85	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5230 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

100 dBuV/m

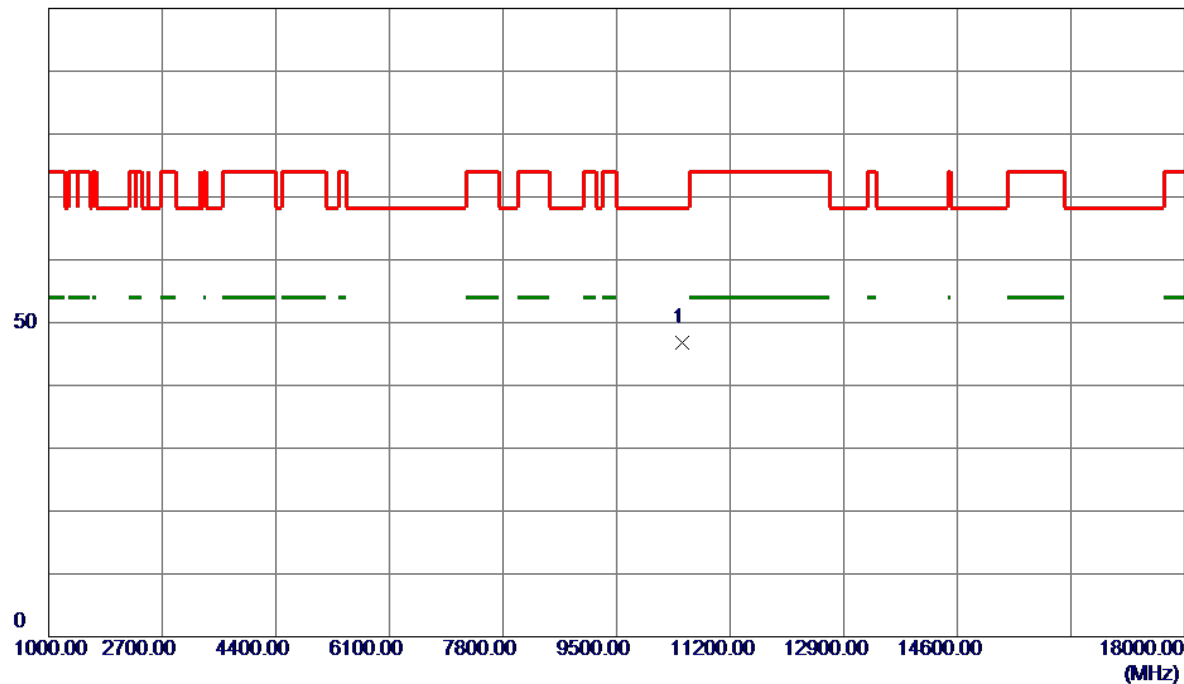


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10475.6500	37.50	9.26	46.76	68.20	-21.44	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT80) Mode 5210 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

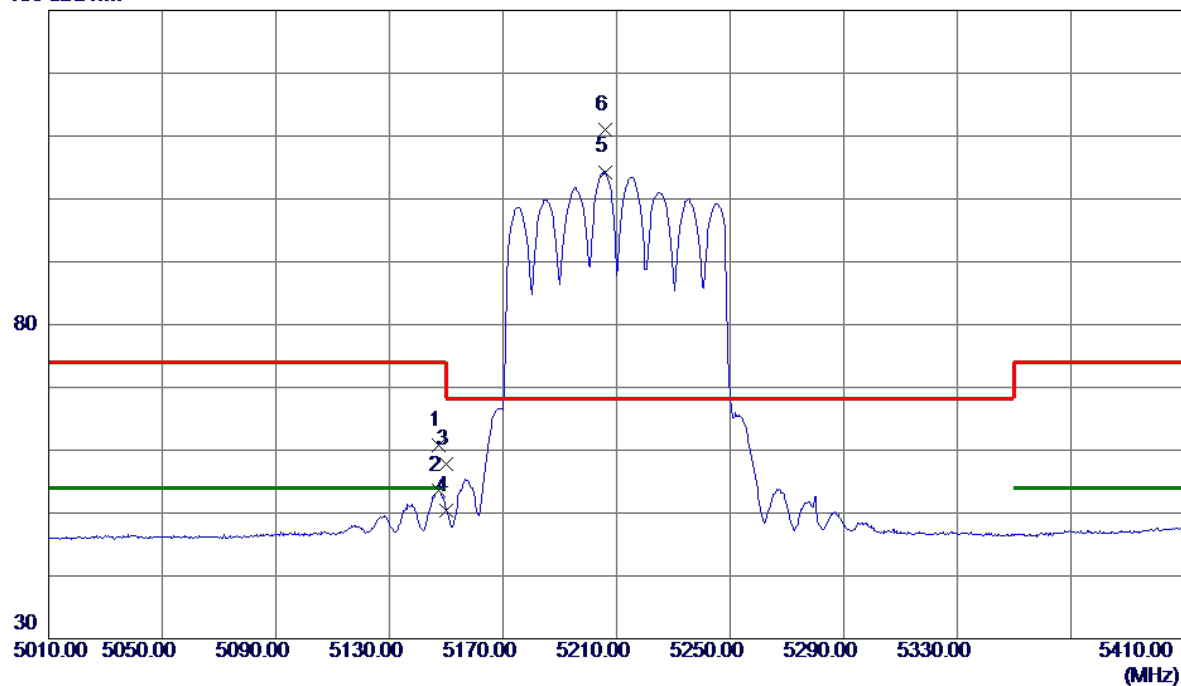


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5147.2000	47.18	13.55	60.73	74.00	-13.27	Peak	
2	5147.2000	40.08	13.55	53.63	54.00	-0.37	AVG	
3	5150.0000	44.32	13.56	57.88	74.00	-16.12	Peak	
4	5150.0000	36.90	13.56	50.46	54.00	-3.54	AVG	
5	5205.8000	90.62	13.68	104.30	999.00	-894.70	AVG	No Limit
6 *	5206.2000	97.41	13.68	111.09	68.20	42.89	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT80) Mode 5210 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

100 dBuV/m

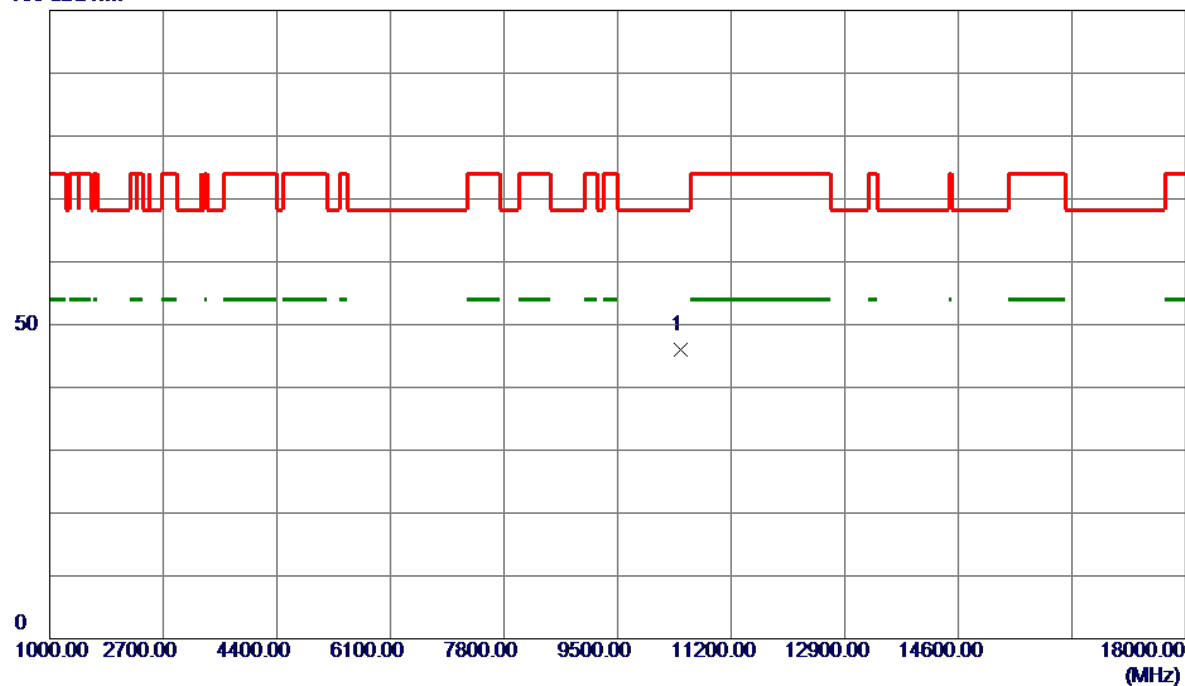


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10443.8500	36.84	9.22	46.06	68.20	-22.14	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE20) Mode 5180 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

130 dBuV/m

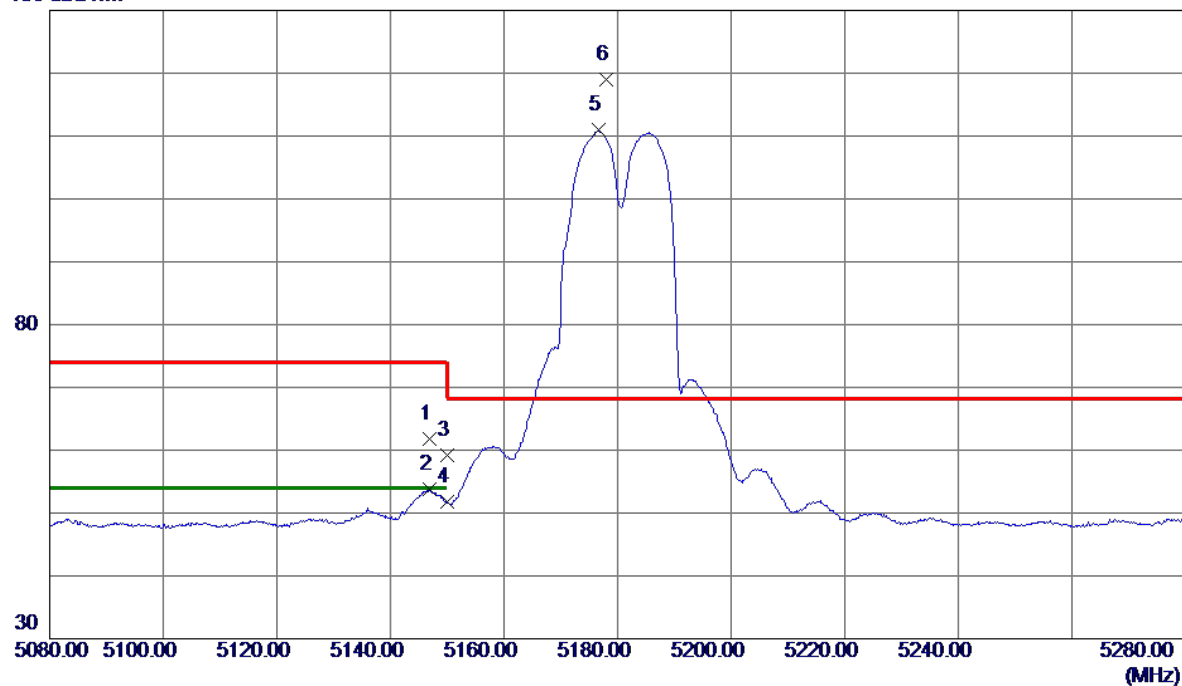


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5146.9000	48.34	13.55	61.89	74.00	-12.11	Peak	
2	5146.9000	40.18	13.55	53.73	54.00	-0.27	AVG	
3	5150.0000	45.59	13.56	59.15	74.00	-14.85	Peak	
4	5150.0000	38.15	13.56	51.71	54.00	-2.29	AVG	
5	5176.6000	97.30	13.62	110.92	999.00	-888.08	AVG	No Limit
6 *	5177.9000	105.46	13.62	119.08	68.20	50.88	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE20) Mode 5180 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

100 dBuV/m

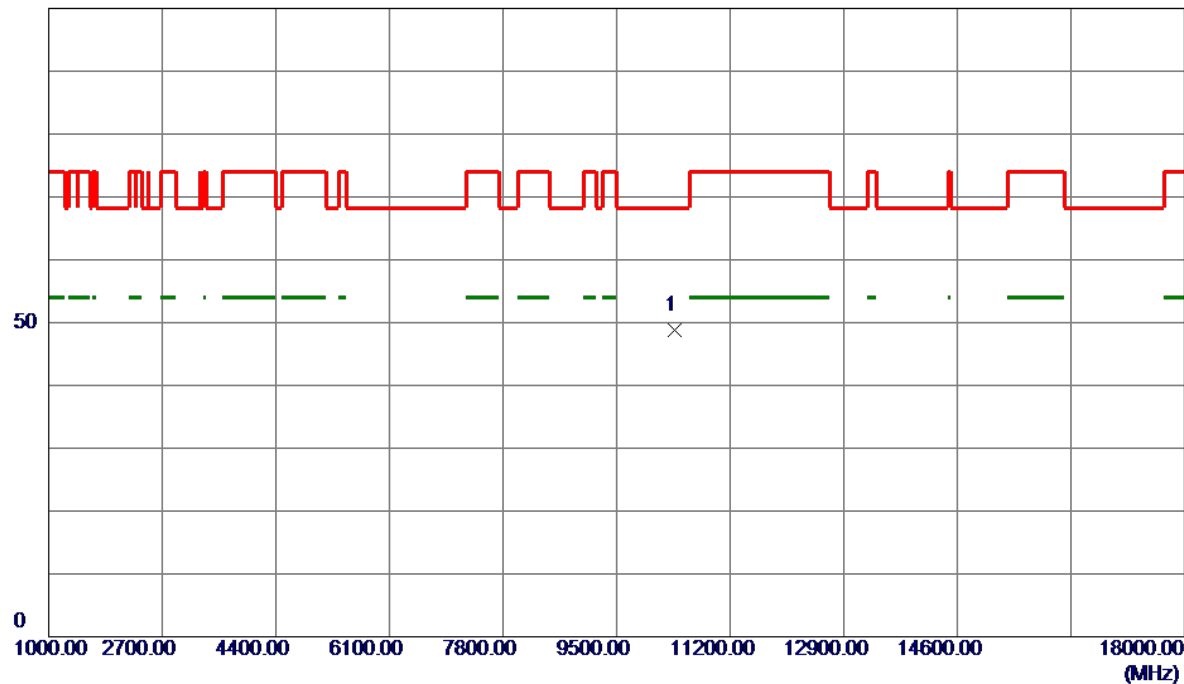


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10360.7850	39.62	9.13	48.75	68.20	-19.45	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE20) Mode 5200 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

130 dBuV/m

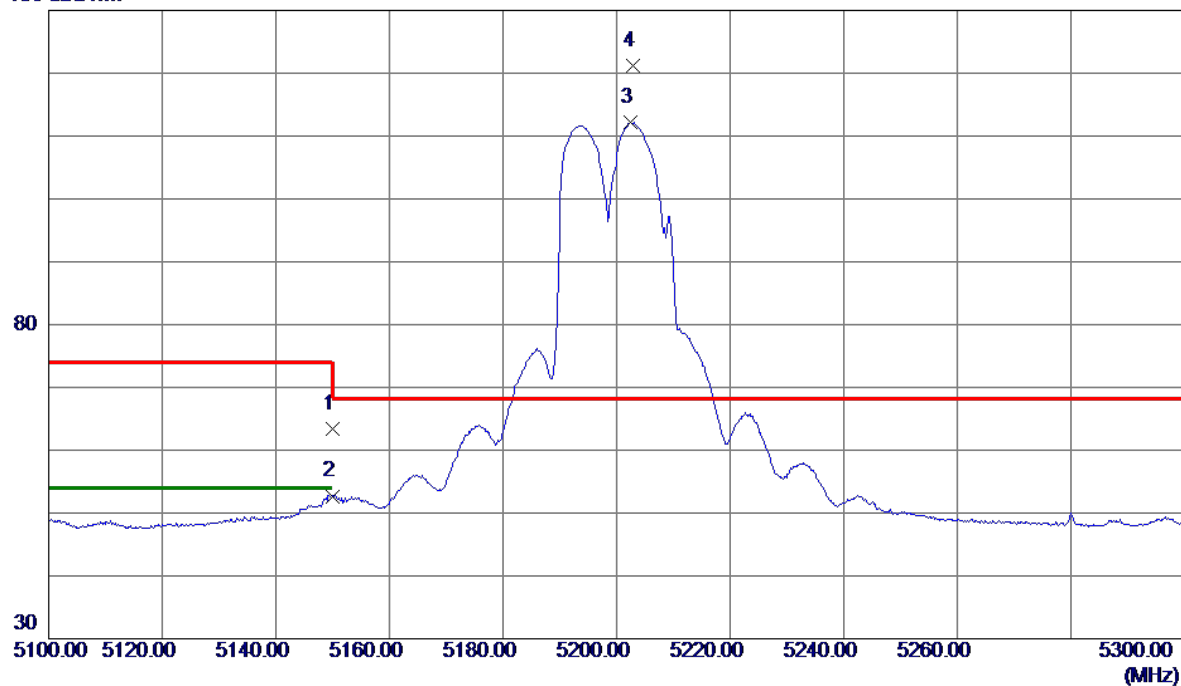


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	49.76	13.56	63.32	74.00	-10.68	Peak	
2	5150.0000	39.14	13.56	52.70	54.00	-1.30	AVG	
3	5202.4000	98.47	13.67	112.14	999.00	-886.86	AVG	No Limit
4 *	5202.9000	107.59	13.67	121.26	68.20	53.06	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE20) Mode 5200 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

100 dBuV/m

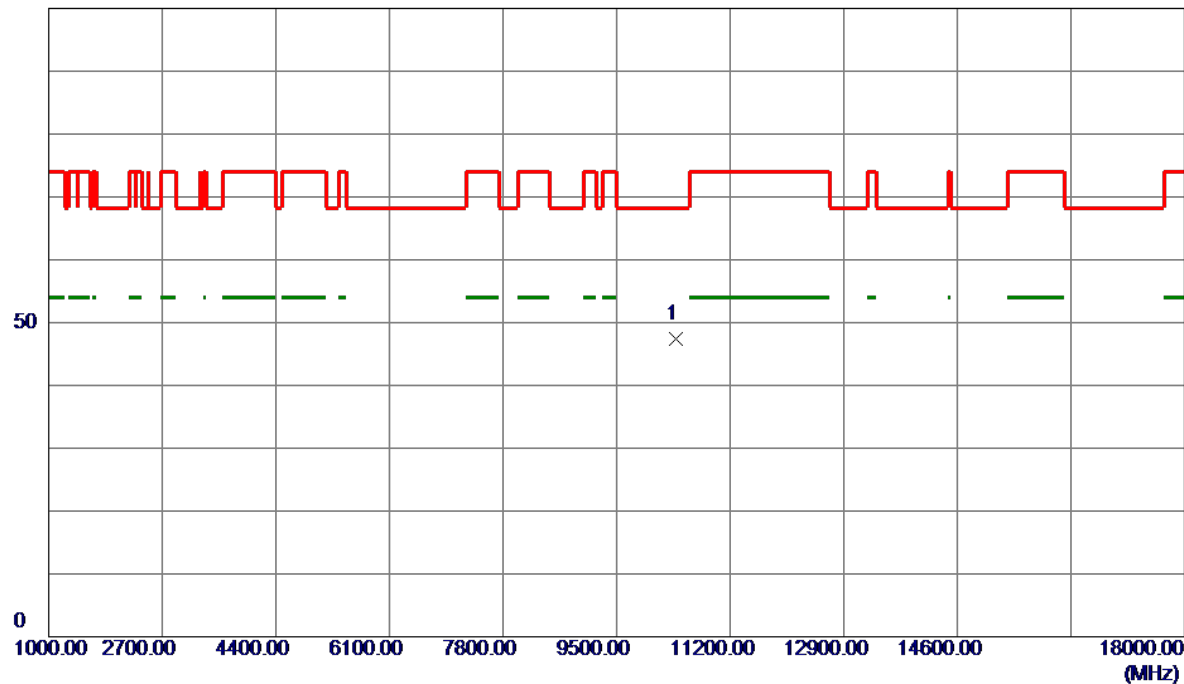


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10396.3000	38.21	9.17	47.38	68.20	-20.82	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE20) Mode 5240 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

100 dBuV/m

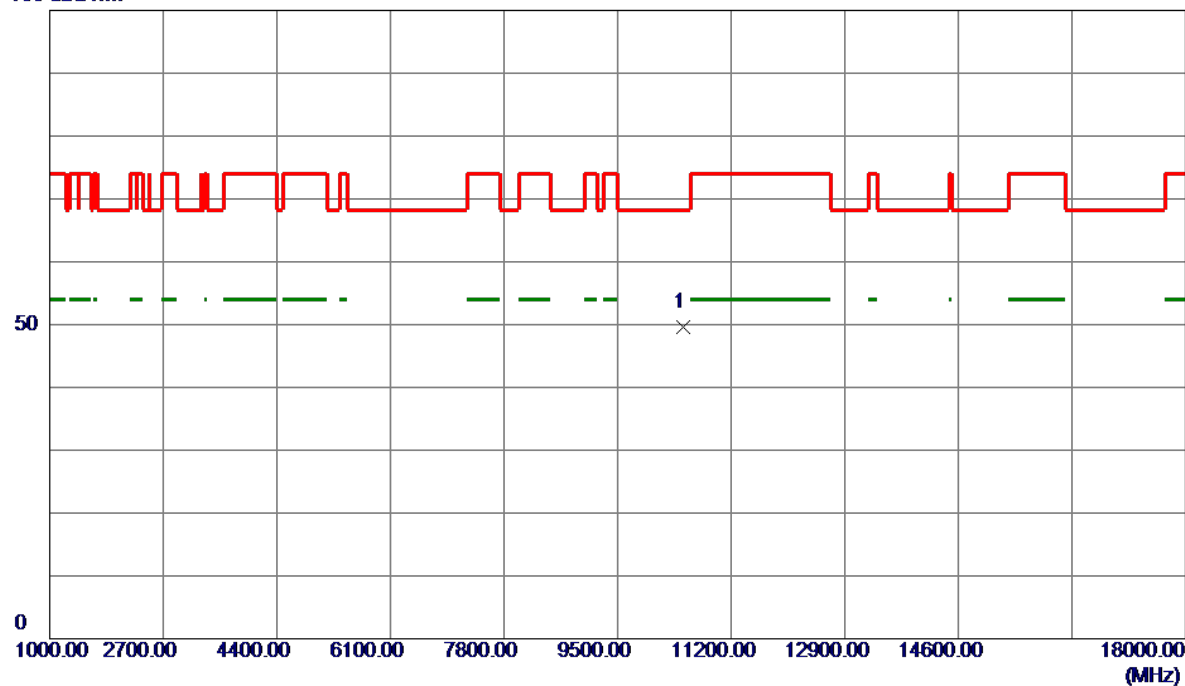


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10479.5830	40.42	9.27	49.69	68.20	-18.51	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE40) Mode 5190 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

130 dBuV/m

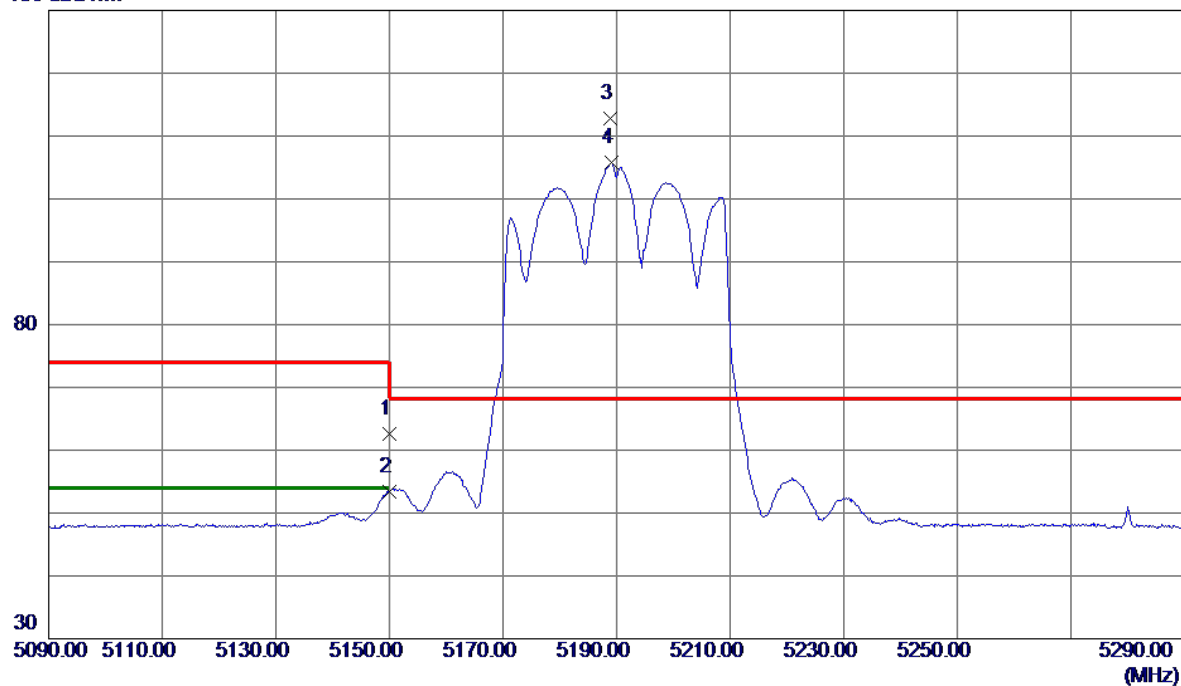


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	49.01	13.56	62.57	74.00	-11.43	Peak	
2	5150.0000	39.91	13.56	53.47	54.00	-0.53	AVG	
3 *	5188.8000	99.21	13.64	112.85	68.20	44.65	Peak	No Limit
4	5189.1000	92.07	13.64	105.71	999.00	-893.29	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE40) Mode 5190 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

100 dBuV/m

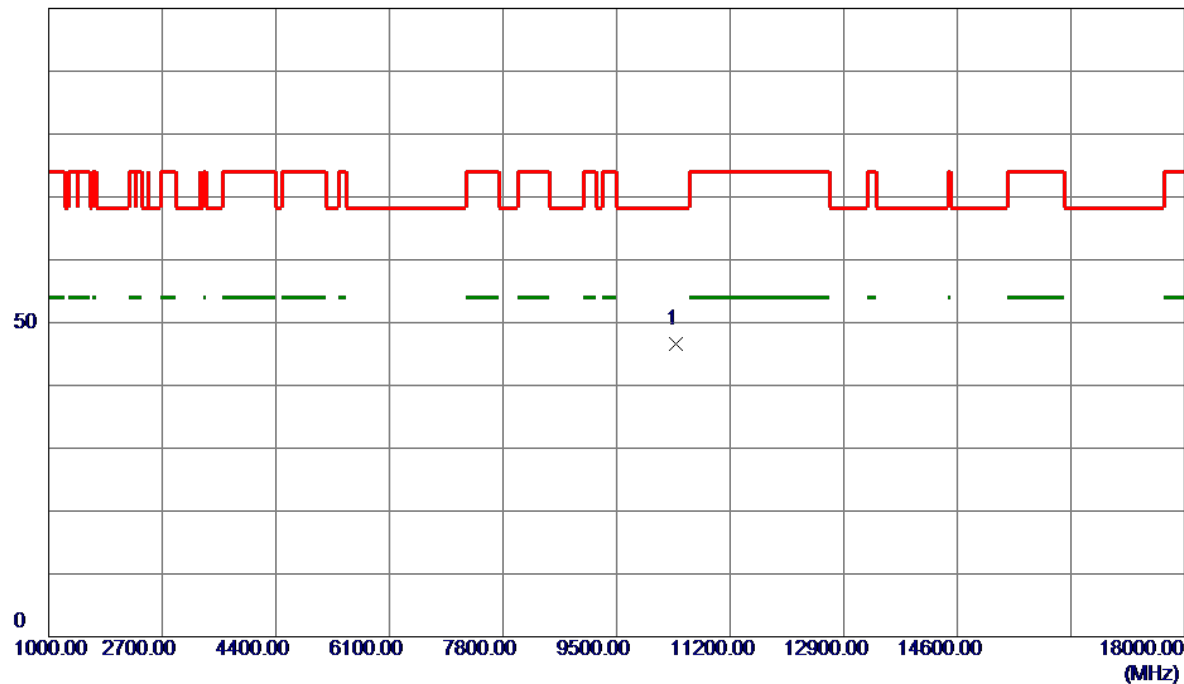


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10380.0400	37.44	9.15	46.59	68.20	-21.61	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE40) Mode 5230 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

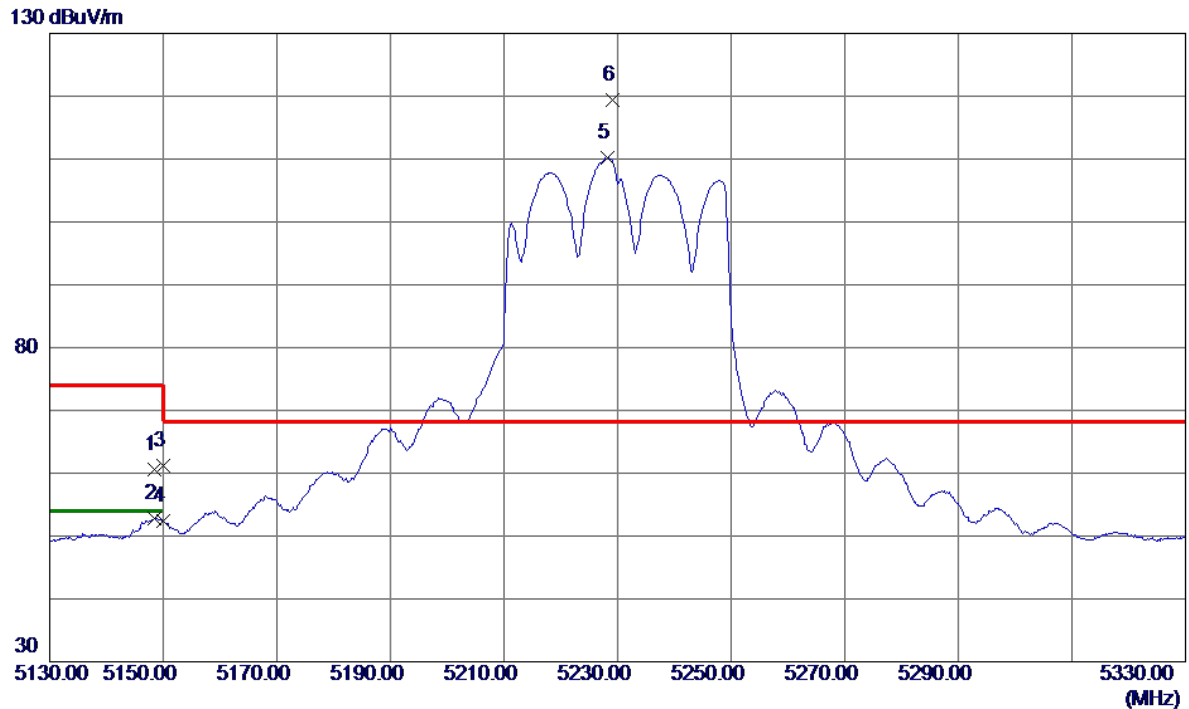


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5148.4000	46.96	13.56	60.52	74.00	-13.48	Peak	
2	5148.4000	39.25	13.56	52.81	54.00	-1.19	AVG	
3	5150.0000	47.63	13.56	61.19	74.00	-12.81	Peak	
4	5150.0000	38.91	13.56	52.47	54.00	-1.53	AVG	
5	5228.3000	96.39	13.72	110.11	999.00	-888.89	AVG	No Limit
6 *	5229.1000	105.73	13.72	119.45	68.20	51.25	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE40) Mode 5230 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

100 dBuV/m

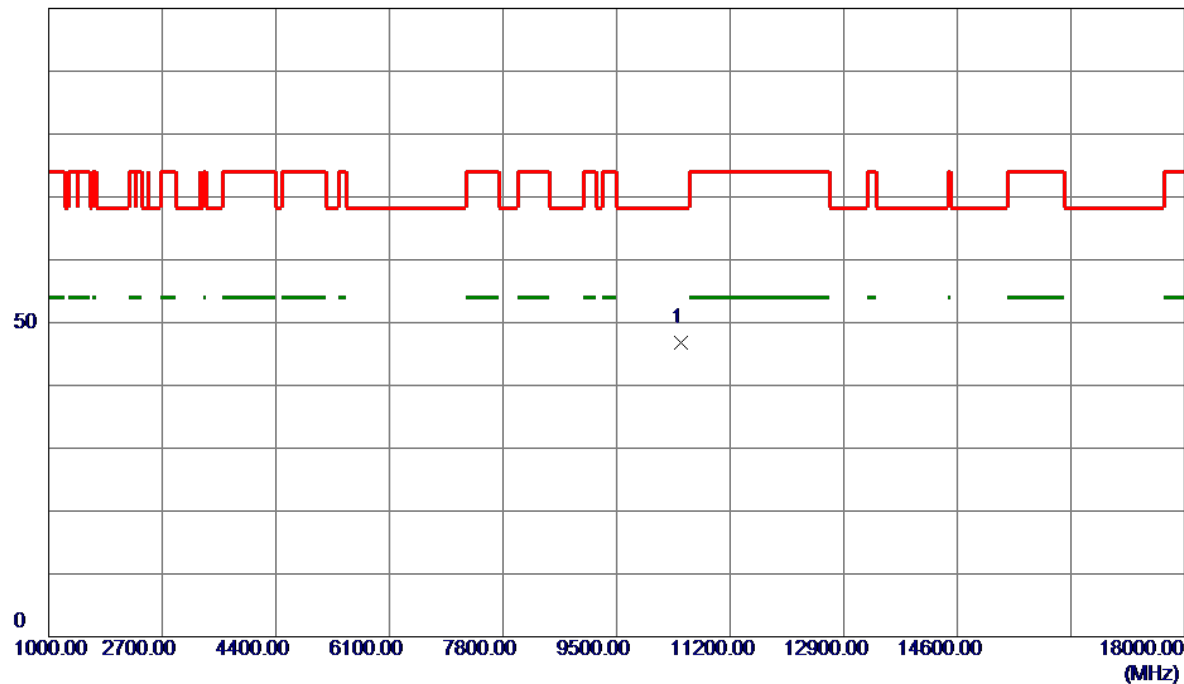


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10455.1500	37.62	9.24	46.86	68.20	-21.34	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE80) Mode 5210 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

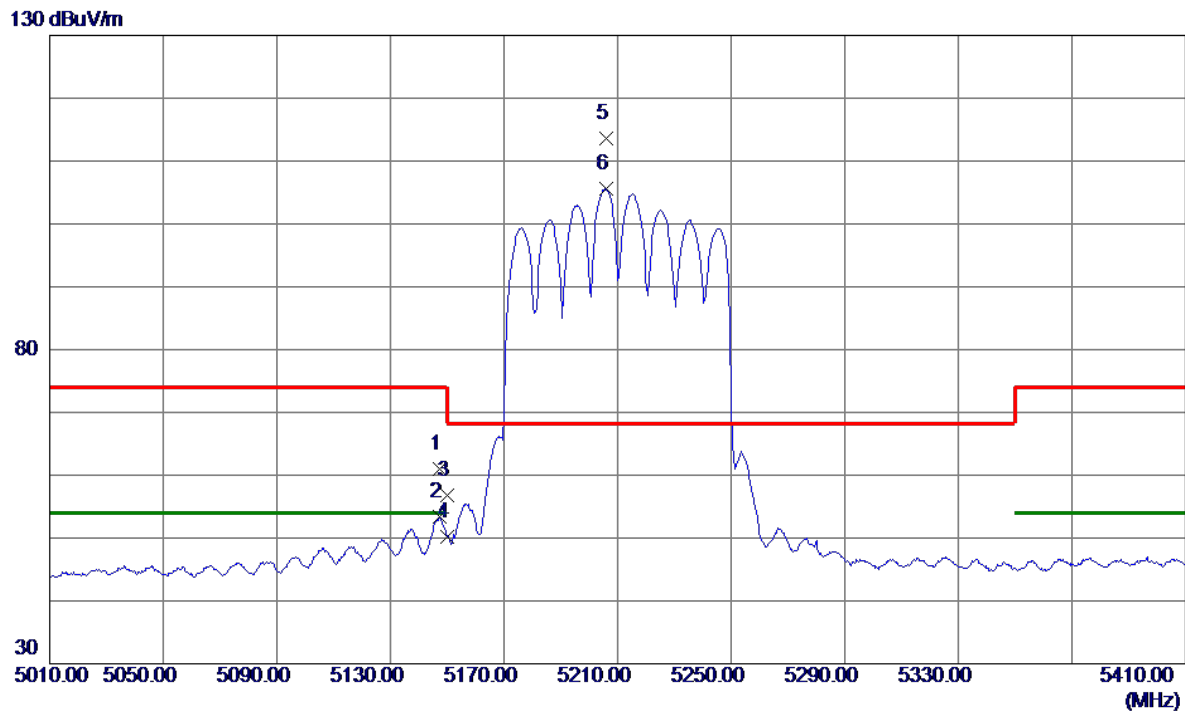


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5147.2000	47.50	13.55	61.05	74.00	-12.95	Peak	
2	5147.2000	39.78	13.55	53.33	54.00	-0.67	AVG	
3	5150.0000	43.27	13.56	56.83	74.00	-17.17	Peak	
4	5150.0000	36.73	13.56	50.29	54.00	-3.71	AVG	
5 *	5205.8000	99.92	13.68	113.60	68.20	45.40	Peak	No Limit
6	5205.8000	91.91	13.68	105.59	999.00	-893.41	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE80) Mode 5210 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

100 dBuV/m

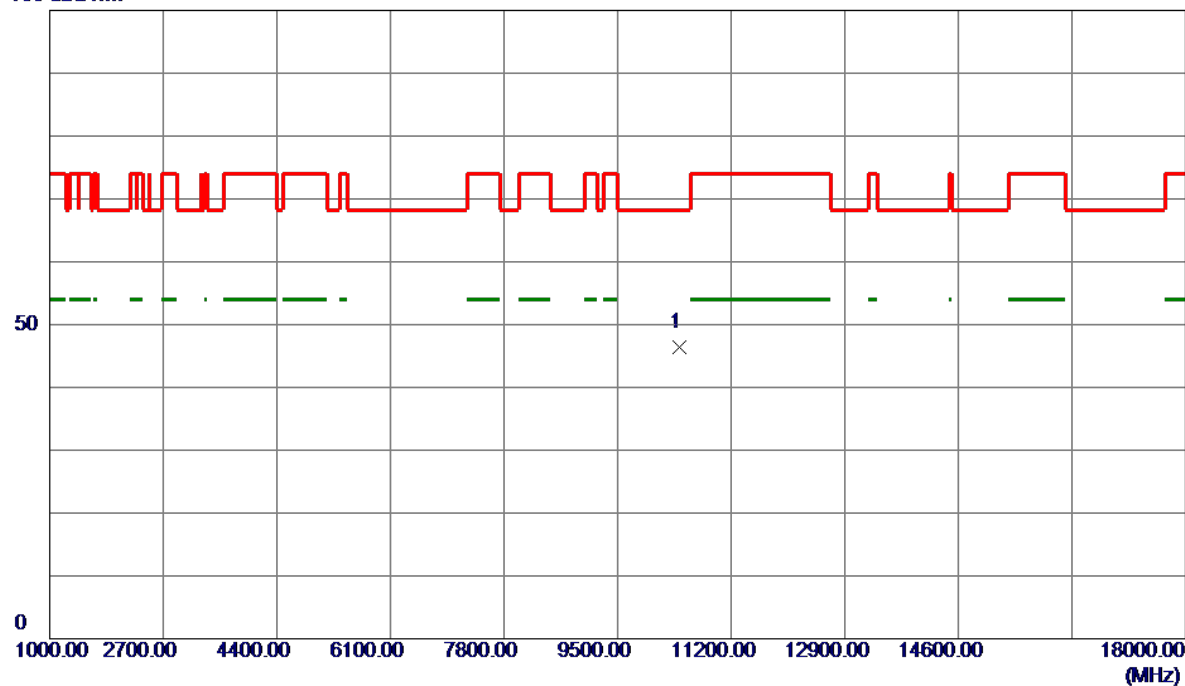


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10420.1650	37.13	9.20	46.33	68.20	-21.87	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5260 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

100 dBuV/m

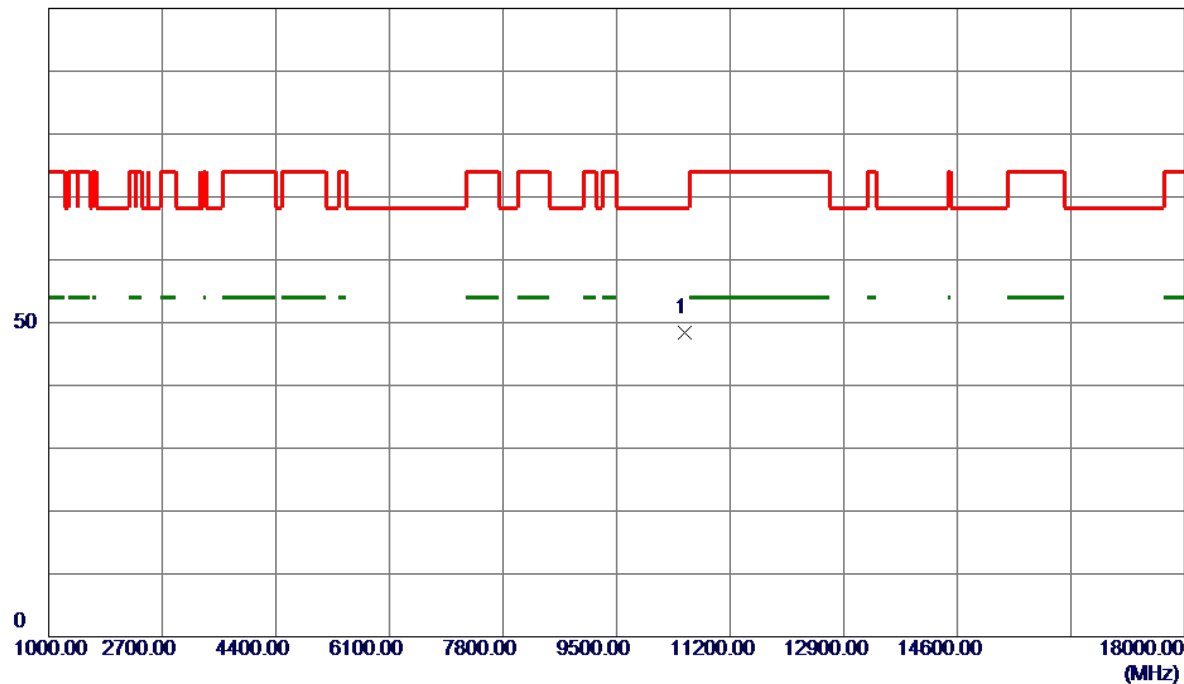


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10525.7000	39.15	9.29	48.44	68.20	-19.76	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5300 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

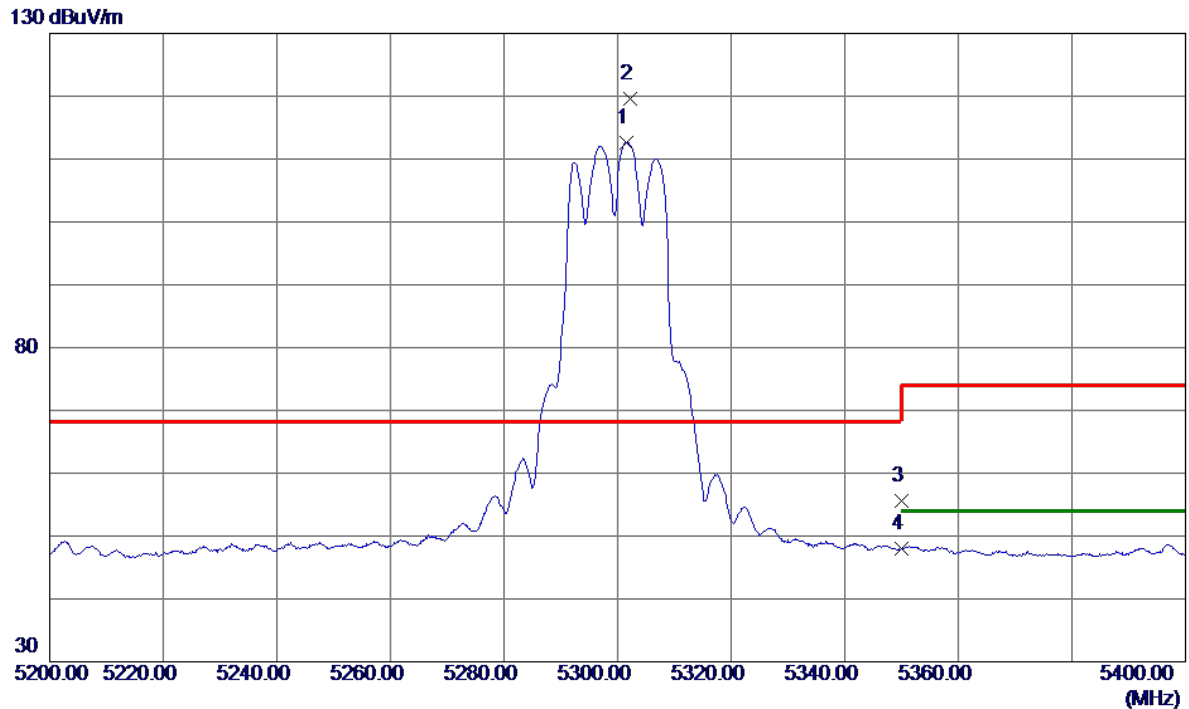


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5301.6000	98.81	13.87	112.68	999.00	-886.32	AVG	No Limit
2 *	5302.2000	105.69	13.88	119.57	68.20	51.37	Peak	No Limit
3	5350.0000	41.70	13.97	55.67	74.00	-18.33	Peak	
4	5350.0000	34.09	13.97	48.06	54.00	-5.94	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5300 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

100 dBuV/m

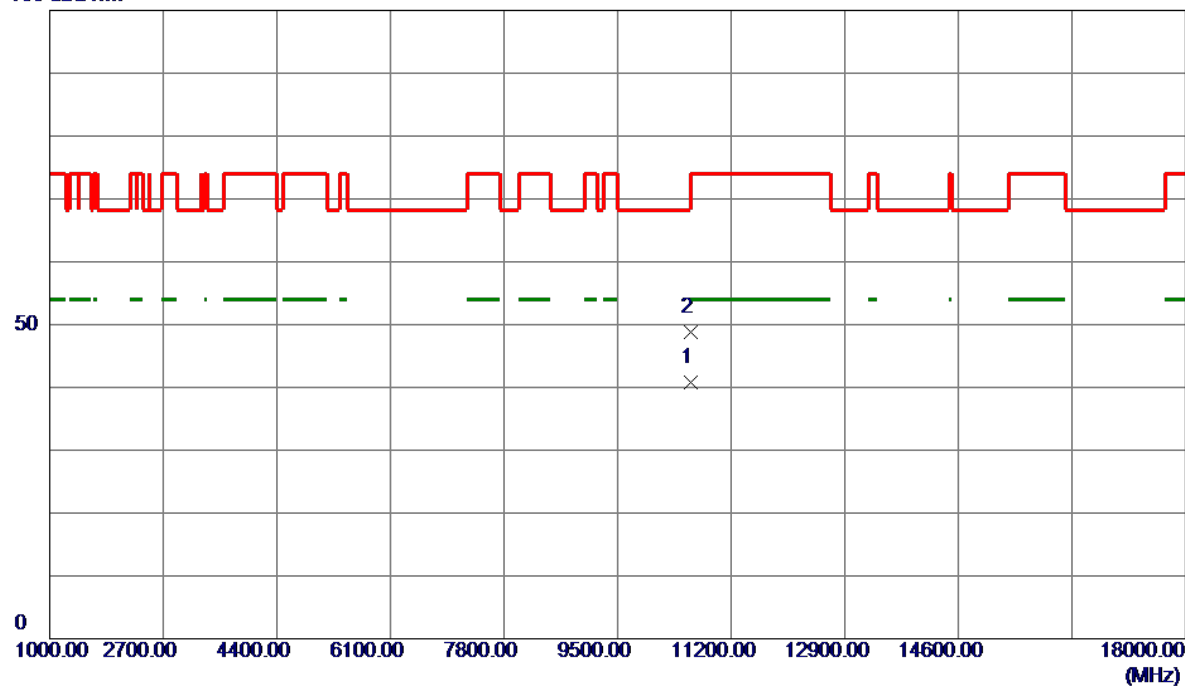


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10600.4000	31.44	9.28	40.72	54.00	-13.28	AVG	
2	10601.4000	39.52	9.28	48.80	74.00	-25.20	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5320 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

130 dBuV/m

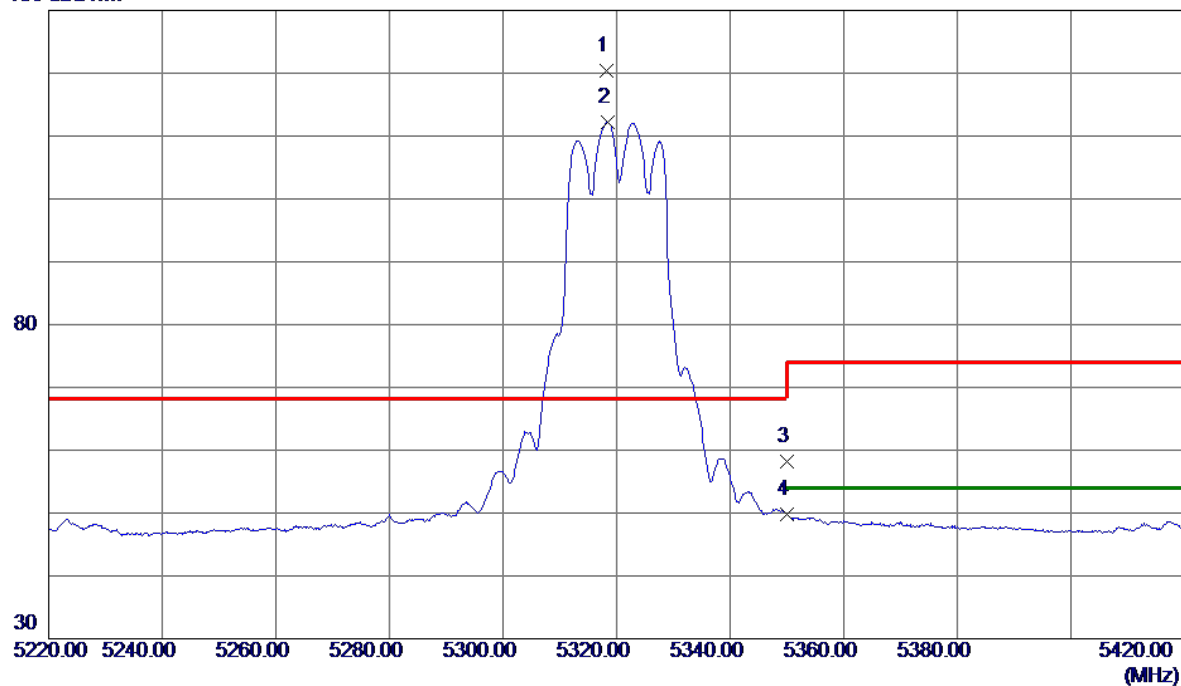


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5318.3000	106.50	13.91	120.41	68.20	52.21	Peak	No Limit
2	5318.4000	98.25	13.91	112.16	999.00	-886.84	AVG	No Limit
3	5350.0000	44.18	13.97	58.15	74.00	-15.85	Peak	
4	5350.0000	35.85	13.97	49.82	54.00	-4.18	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5320 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

100 dBuV/m

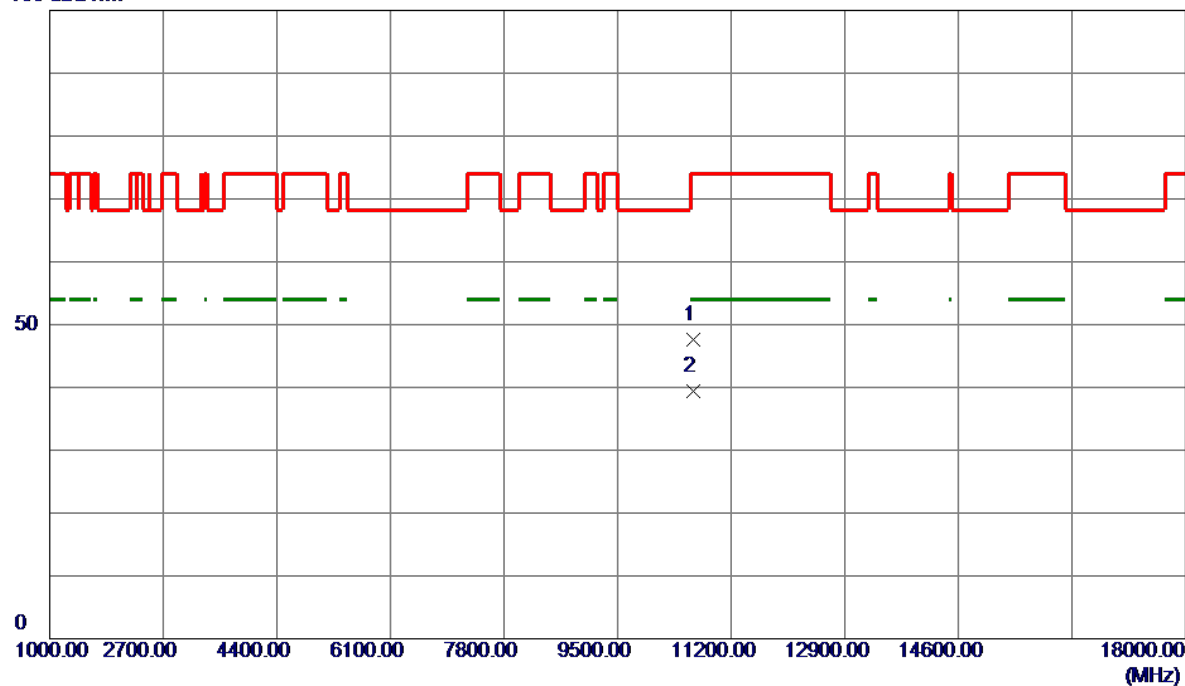


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10641.2000	38.39	9.28	47.67	74.00	-26.33	Peak	
2 *	10641.6000	30.12	9.28	39.40	54.00	-14.60	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5260 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

100 dBuV/m

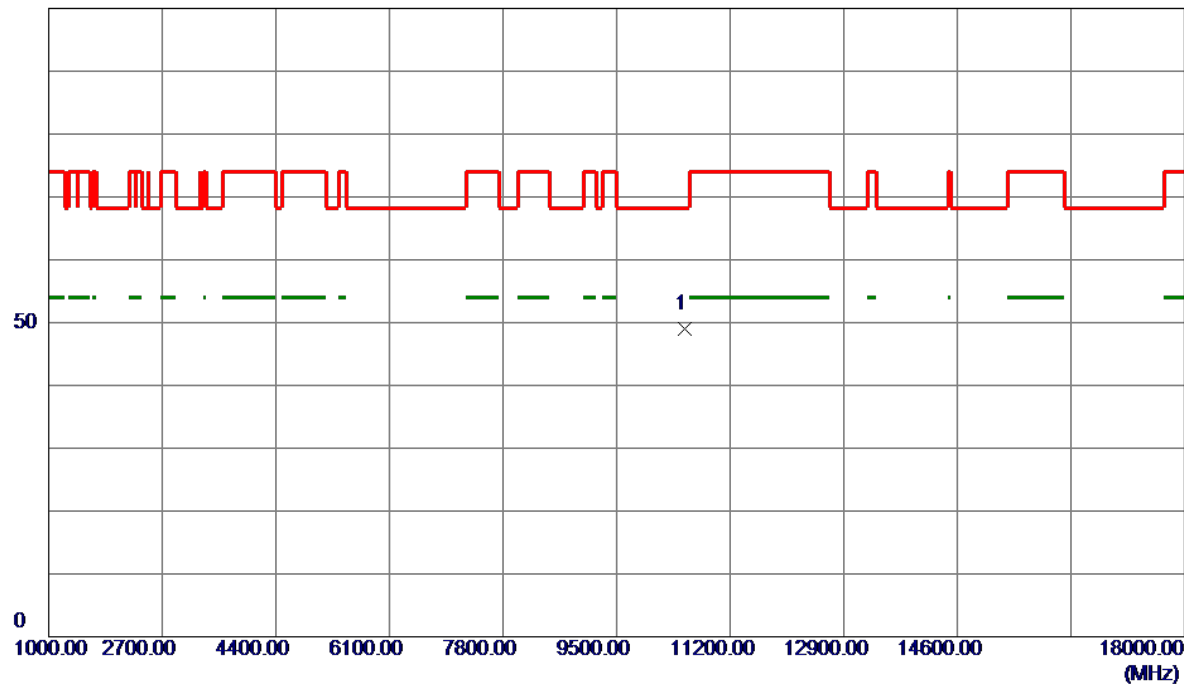


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10520.0000	39.71	9.29	49.00	68.20	-19.20	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5300 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

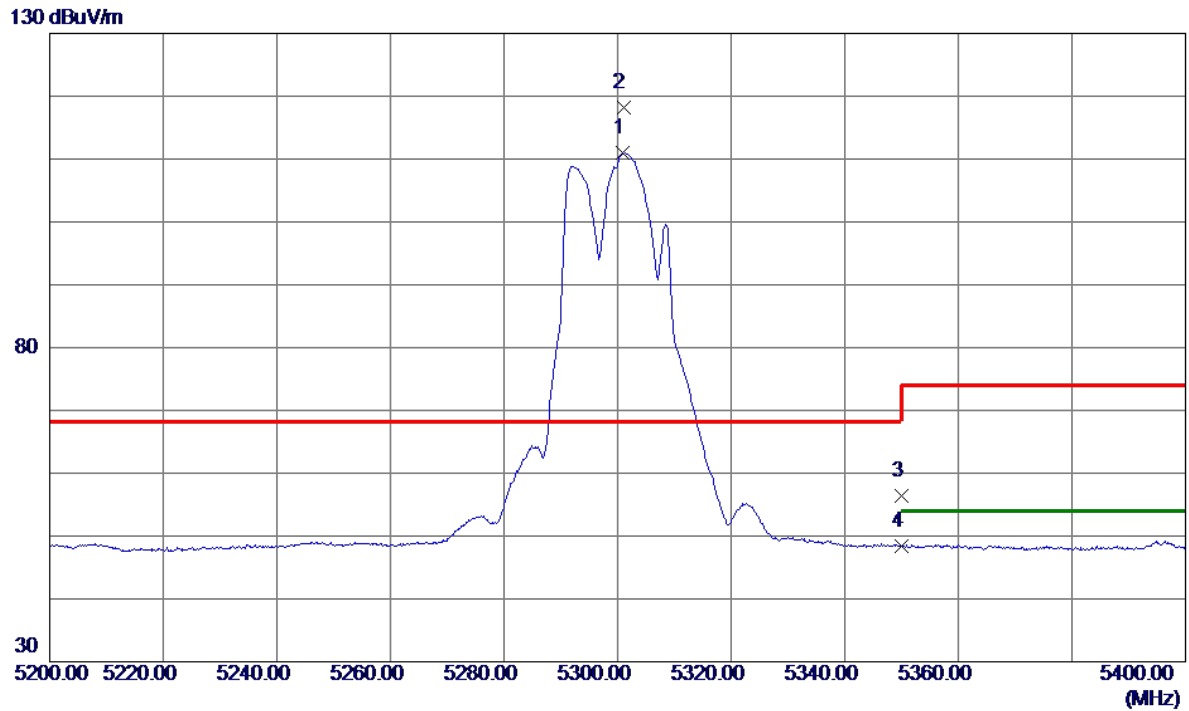


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5300.9000	97.20	13.87	111.07	999.00	-887.93	AVG	No Limit
2 *	5301.0000	104.31	13.87	118.18	68.20	49.98	Peak	No Limit
3	5350.0000	42.35	13.97	56.32	74.00	-17.68	Peak	
4	5350.0000	34.39	13.97	48.36	54.00	-5.64	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5300 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

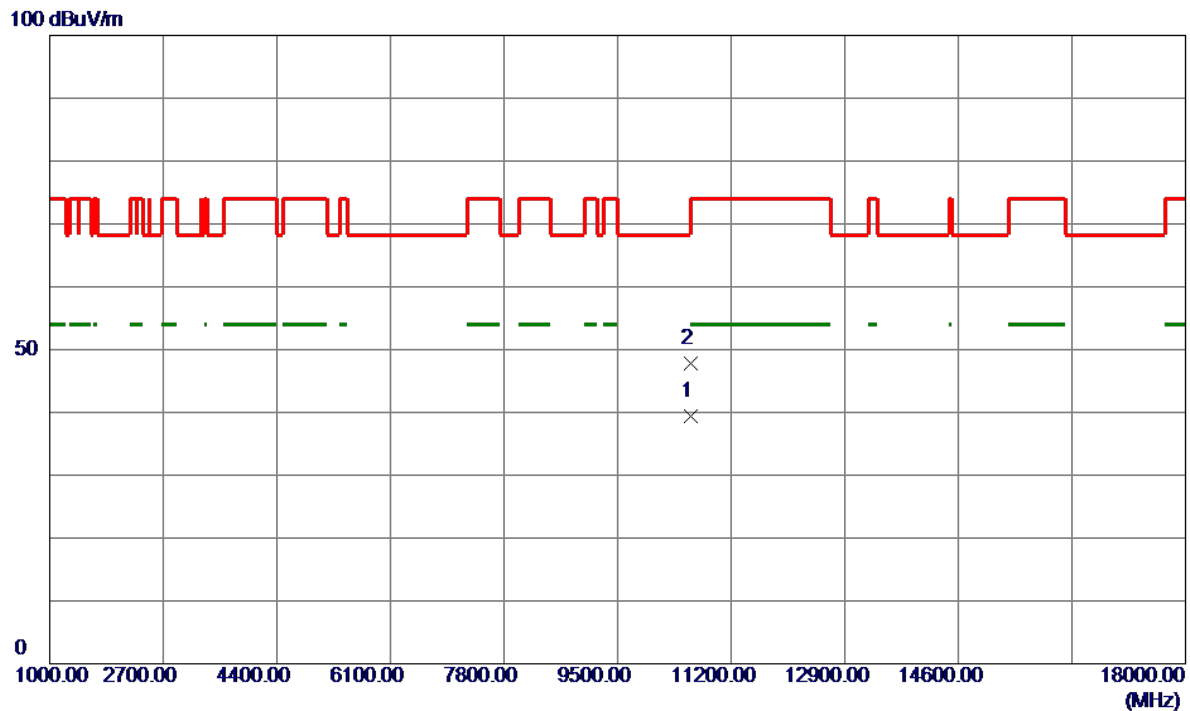


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10599.7500	30.07	9.28	39.35	999.00	-959.65	AVG	
2 *	10602.3500	38.60	9.28	47.88	74.00	-26.12	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5320 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

130 dBuV/m

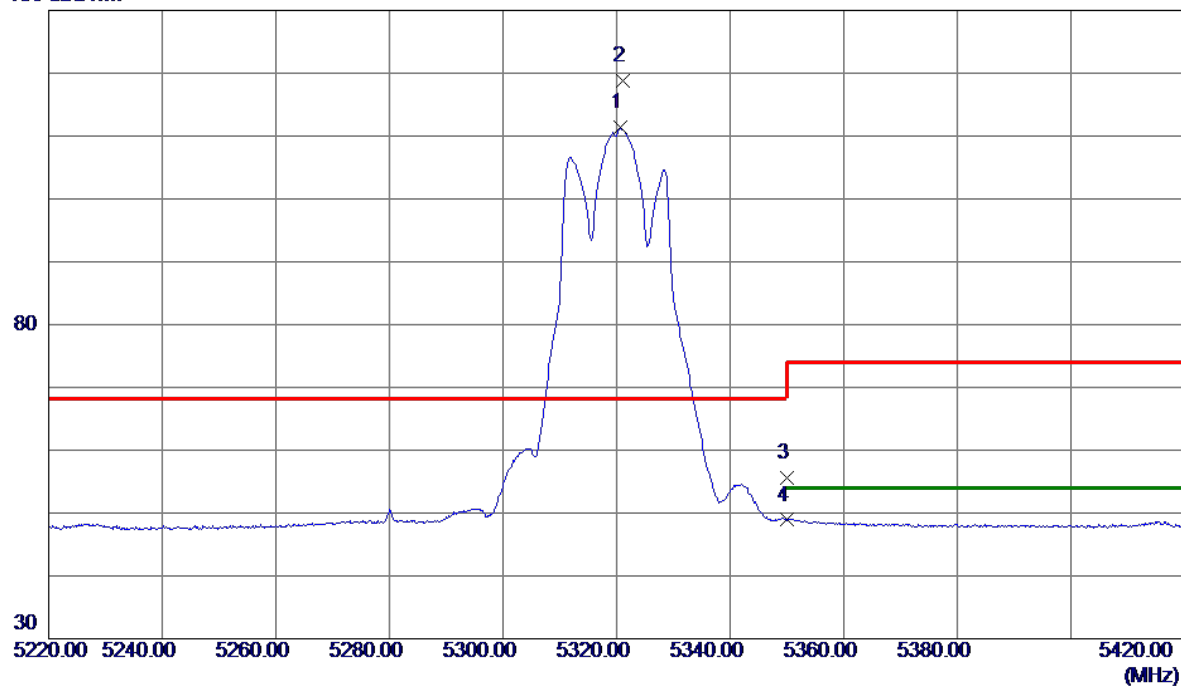


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5320.6000	97.43	13.91	111.34	999.00	-887.66	AVG	No Limit
2 *	5321.2000	104.94	13.91	118.85	68.20	50.65	Peak	No Limit
3	5350.0000	41.59	13.97	55.56	74.00	-18.44	Peak	
4	5350.0000	34.93	13.97	48.90	54.00	-5.10	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5320 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

100 dBuV/m

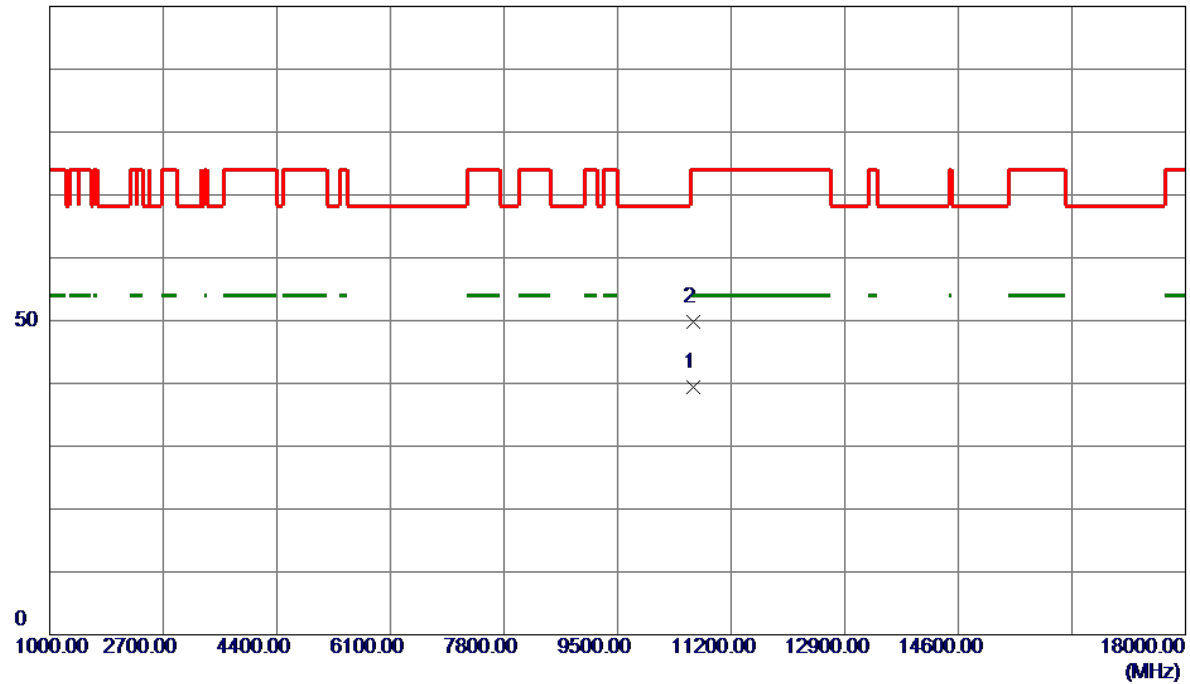


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10640.1500	30.11	9.28	39.39	54.00	-14.61	AVG	
2	10642.7500	40.45	9.28	49.73	74.00	-24.27	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5270 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

130 dBuV/m

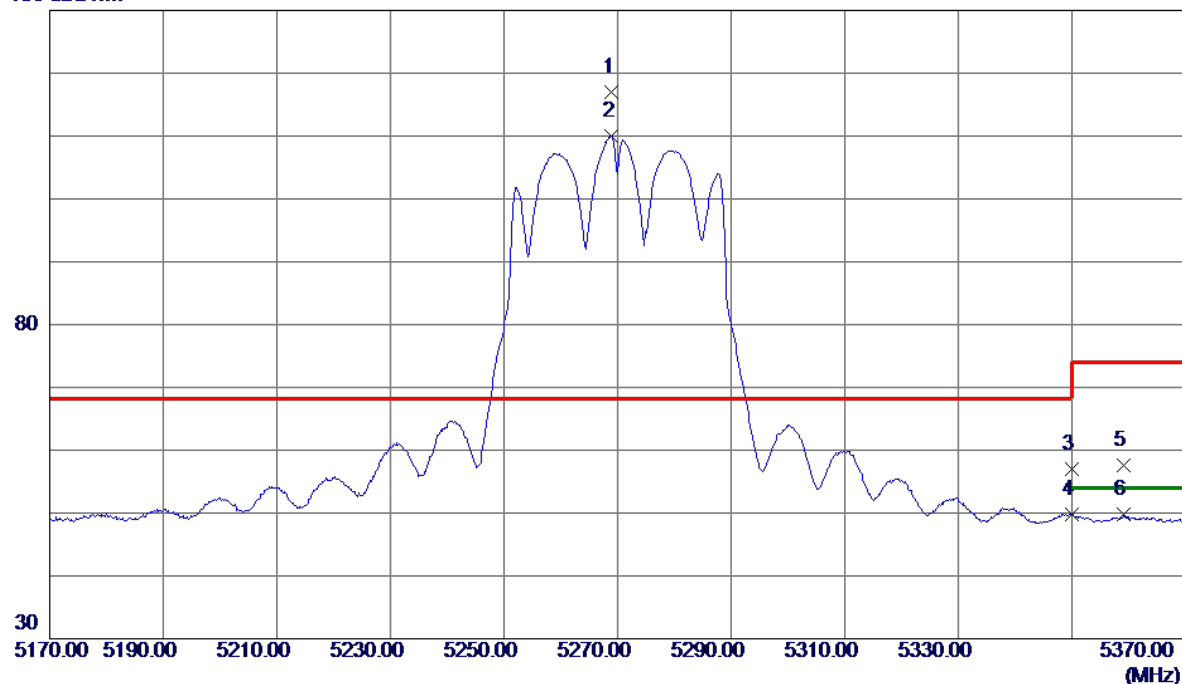


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5269.0000	103.26	13.81	117.07	68.20	48.87	Peak	No Limit
2	5269.0000	96.22	13.81	110.03	999.00	-888.97	AVG	No Limit
3	5350.0000	42.97	13.97	56.94	74.00	-17.06	Peak	
4	5350.0000	35.77	13.97	49.74	54.00	-4.26	AVG	
5	5359.2000	43.57	13.99	57.56	74.00	-16.44	Peak	
6	5359.2000	35.88	13.99	49.87	54.00	-4.13	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5270 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

100 dBuV/m

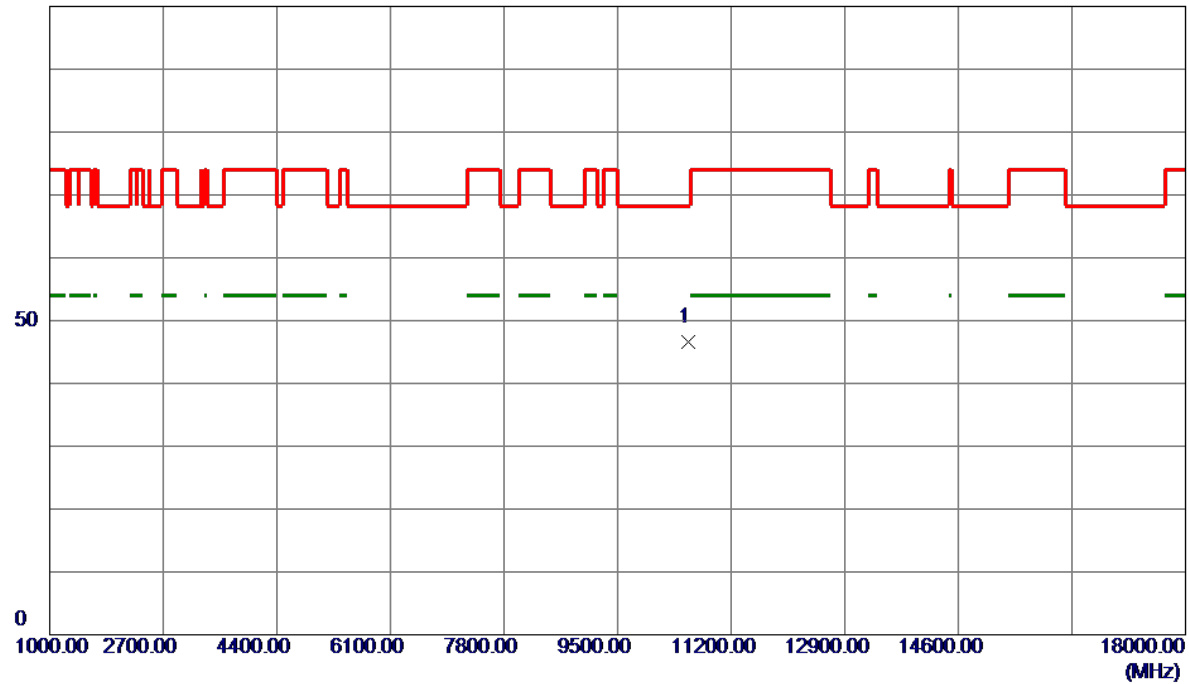


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10549.3000	37.33	9.29	46.62	68.20	-21.58	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5310 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

130 dBuV/m

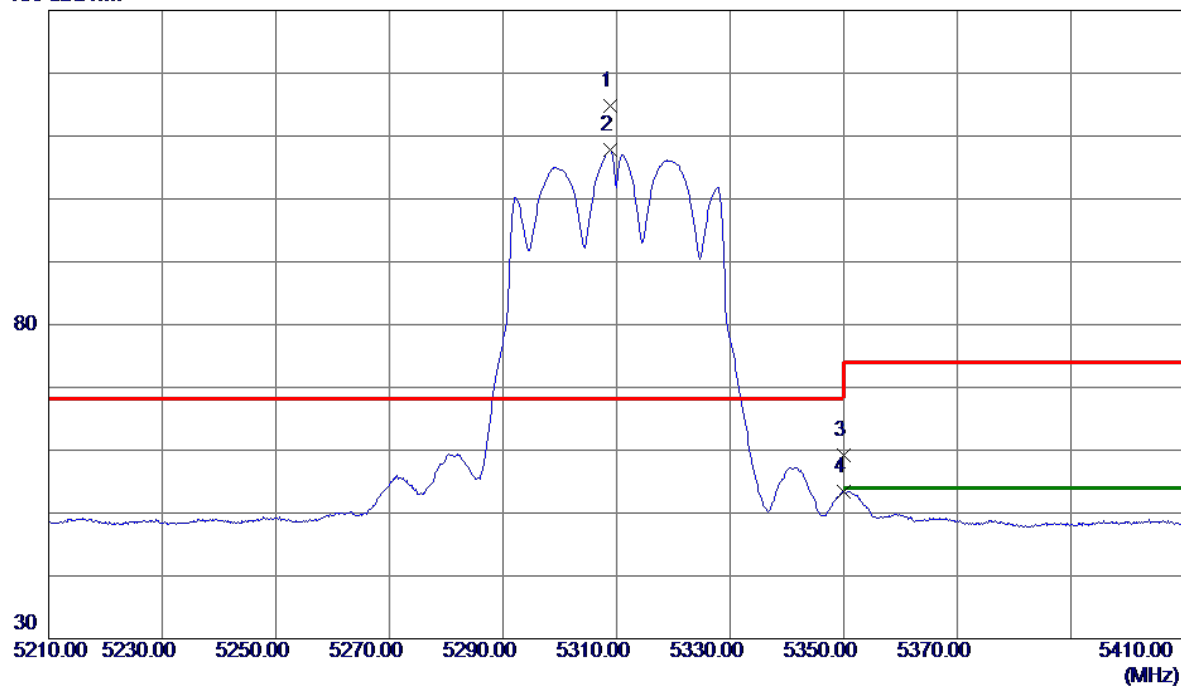


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5308.9000	100.89	13.89	114.78	68.20	46.58	Peak	No Limit
2	5308.9000	93.82	13.89	107.71	999.00	-891.29	AVG	No Limit
3	5350.0000	45.25	13.97	59.22	74.00	-14.78	Peak	
4	5350.0000	39.46	13.97	53.43	54.00	-0.57	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5310 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

100 dBuV/m

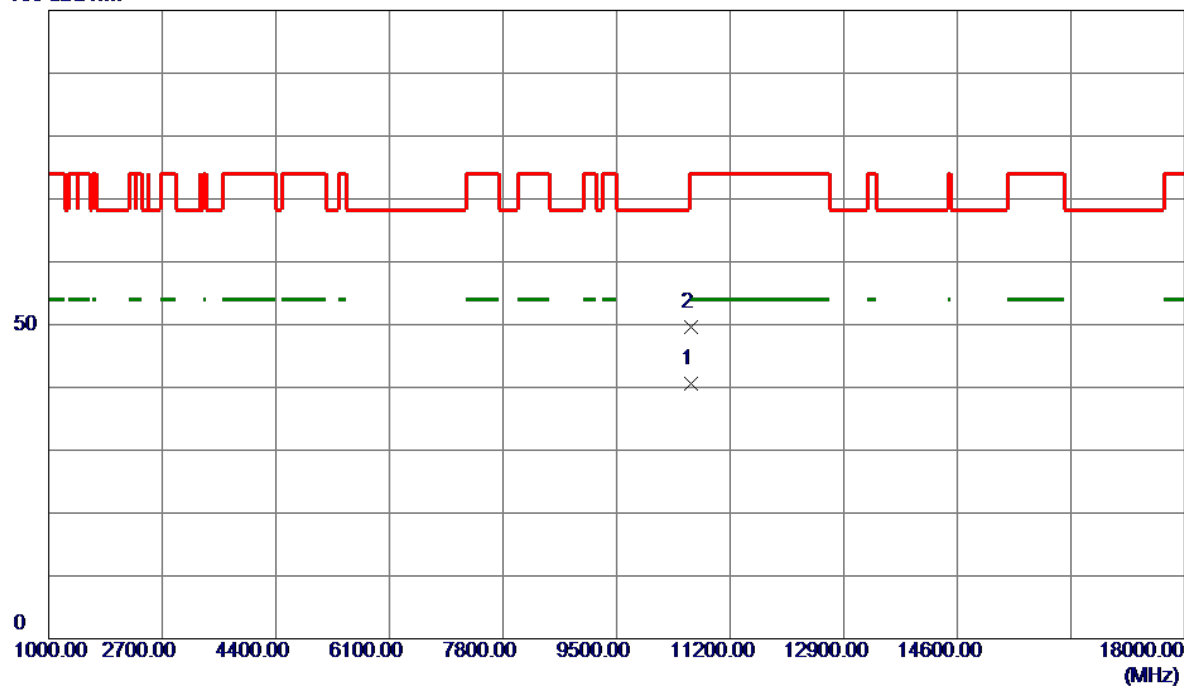


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10619.9000	31.24	9.28	40.52	54.00	-13.48	AVG	
2	10620.1500	40.25	9.28	49.53	74.00	-24.47	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT80) Mode 5290 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

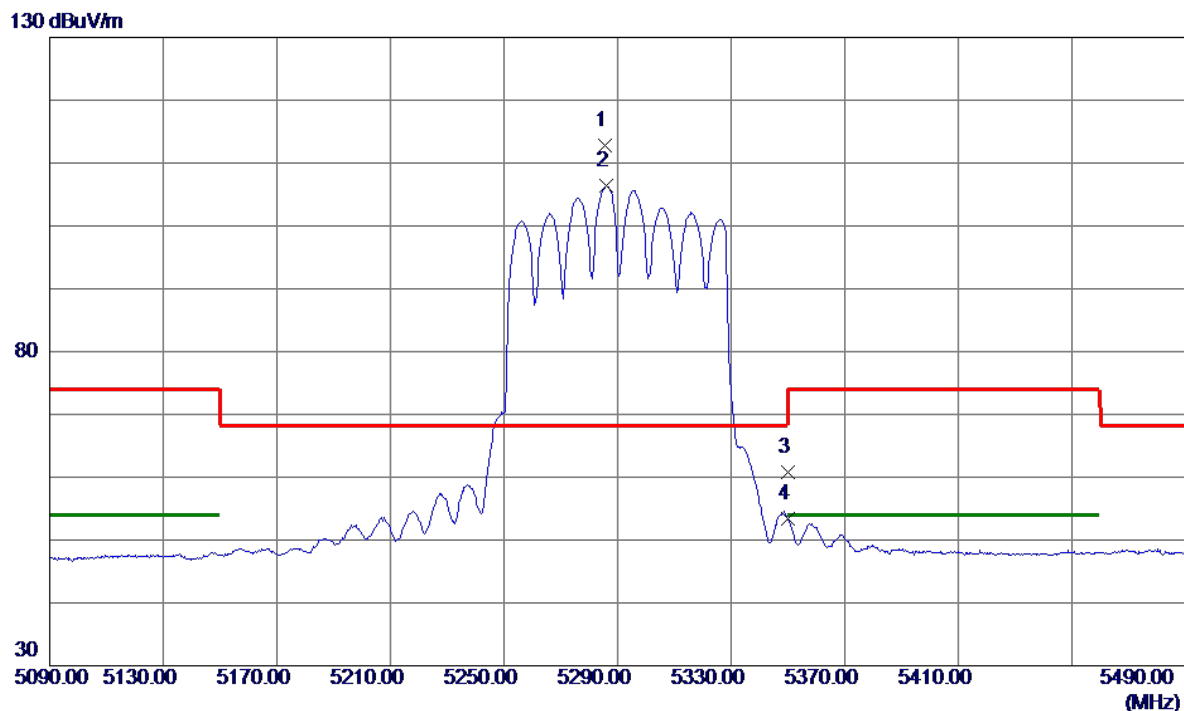


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5285.4000	98.93	13.84	112.77	68.20	44.57	Peak	No Limit
2	5286.0000	92.54	13.84	106.38	999.00	-892.62	AVG	No Limit
3	5350.0000	46.85	13.97	60.82	74.00	-13.18	Peak	
4	5350.0000	39.46	13.97	53.43	54.00	-0.57	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT80) Mode 5290 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

100 dBuV/m

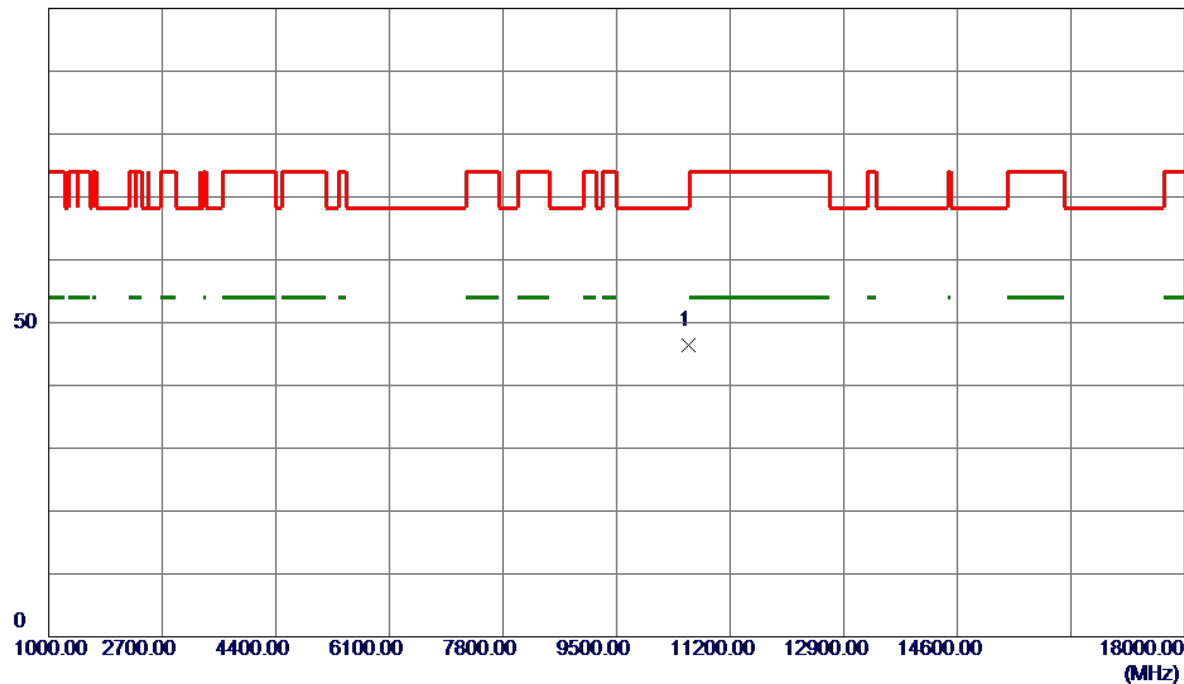


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10579.8000	37.20	9.29	46.49	68.20	-21.71	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5260 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

100 dBuV/m

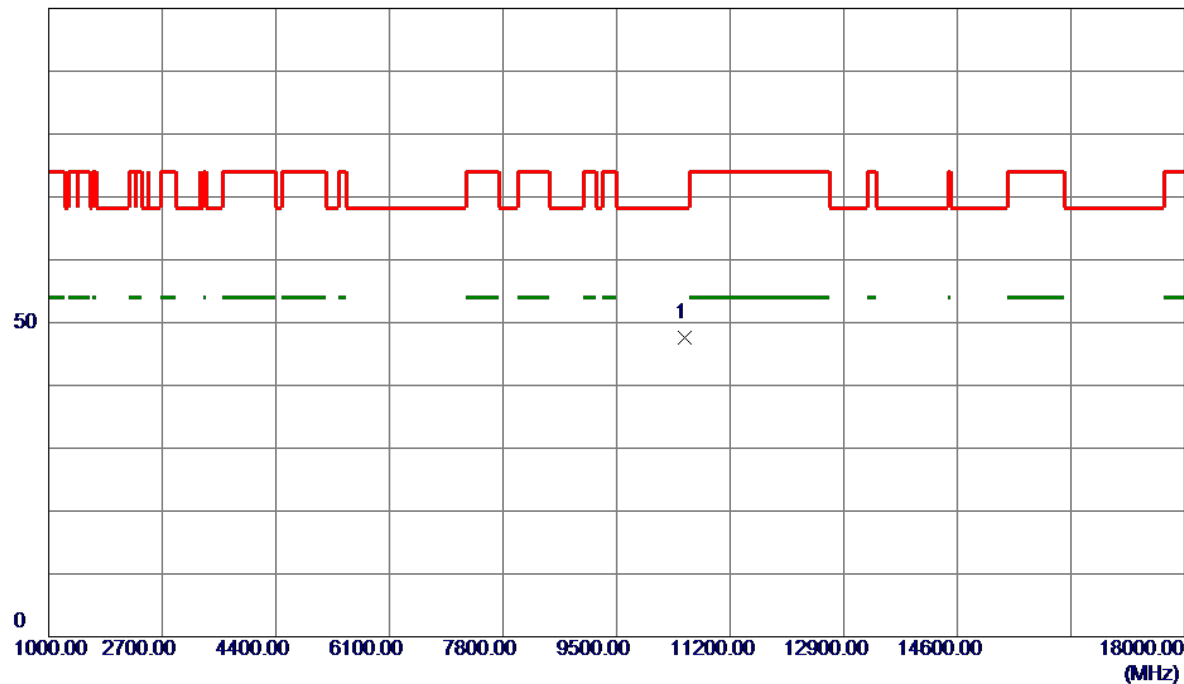


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10520.1950	38.36	9.29	47.65	68.20	-20.55	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5300 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

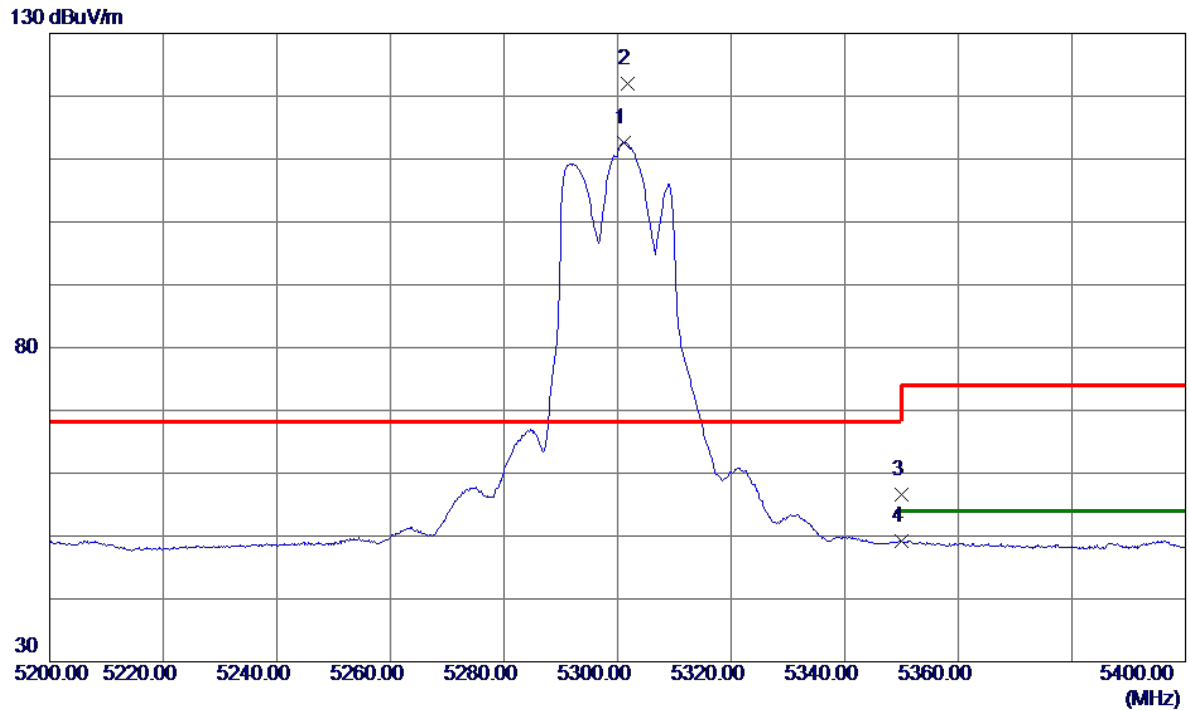


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5301.2000	98.75	13.87	112.62	999.00	-886.38	AVG	No Limit
2 *	5301.7000	108.14	13.87	122.01	68.20	53.81	Peak	No Limit
3	5350.0000	42.54	13.97	56.51	74.00	-17.49	Peak	
4	5350.0000	35.16	13.97	49.13	54.00	-4.87	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5300 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

100 dBuV/m

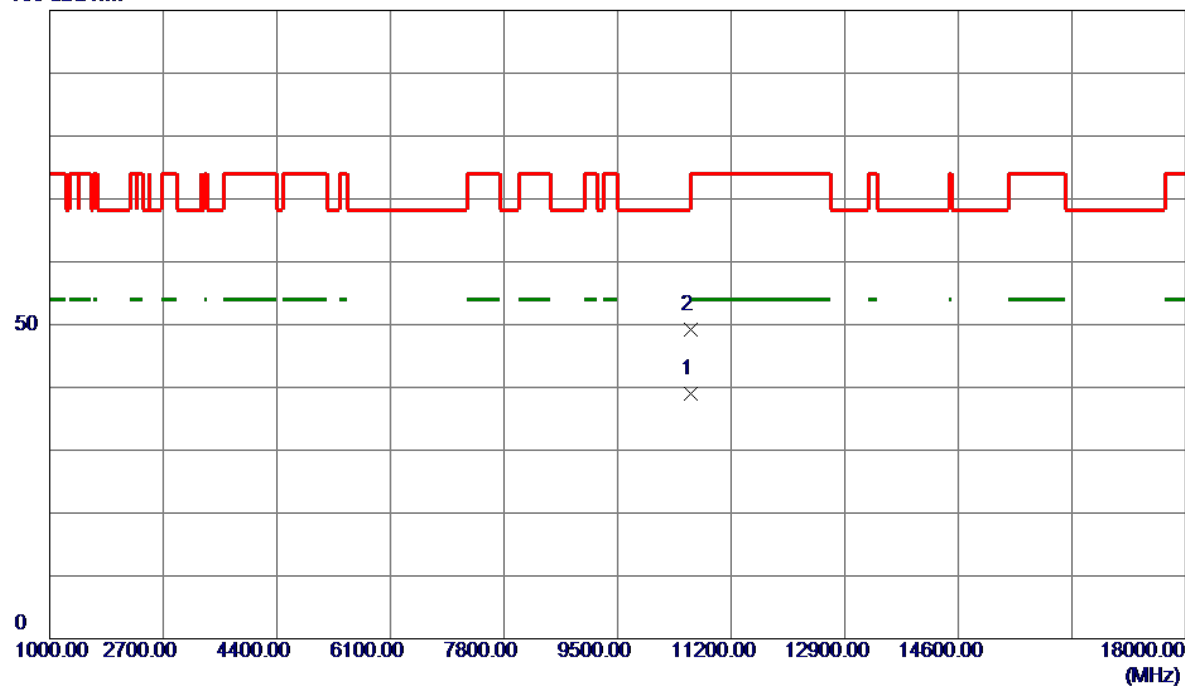


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10599.7550	29.70	9.28	38.98	999.00	-960.02	AVG	
2 *	10600.5100	39.94	9.28	49.22	74.00	-24.78	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5320 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

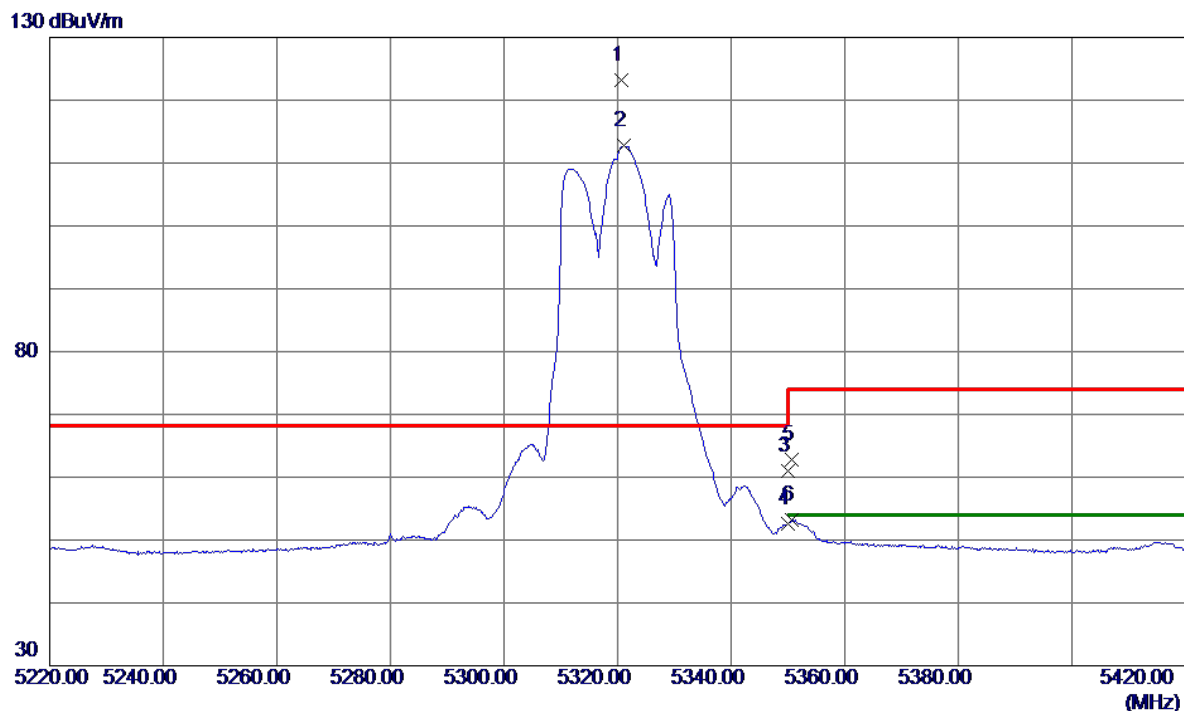


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5320.7000	109.30	13.91	123.21	68.20	55.01	Peak	No Limit
2	5321.1000	98.87	13.91	112.78	999.00	-886.22	AVG	No Limit
3	5350.0000	47.02	13.97	60.99	74.00	-13.01	Peak	
4	5350.0000	38.61	13.97	52.58	54.00	-1.42	AVG	
5	5350.7000	48.90	13.98	62.88	74.00	-11.12	Peak	
6	5350.7000	39.25	13.98	53.23	54.00	-0.77	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5320 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

100 dBuV/m

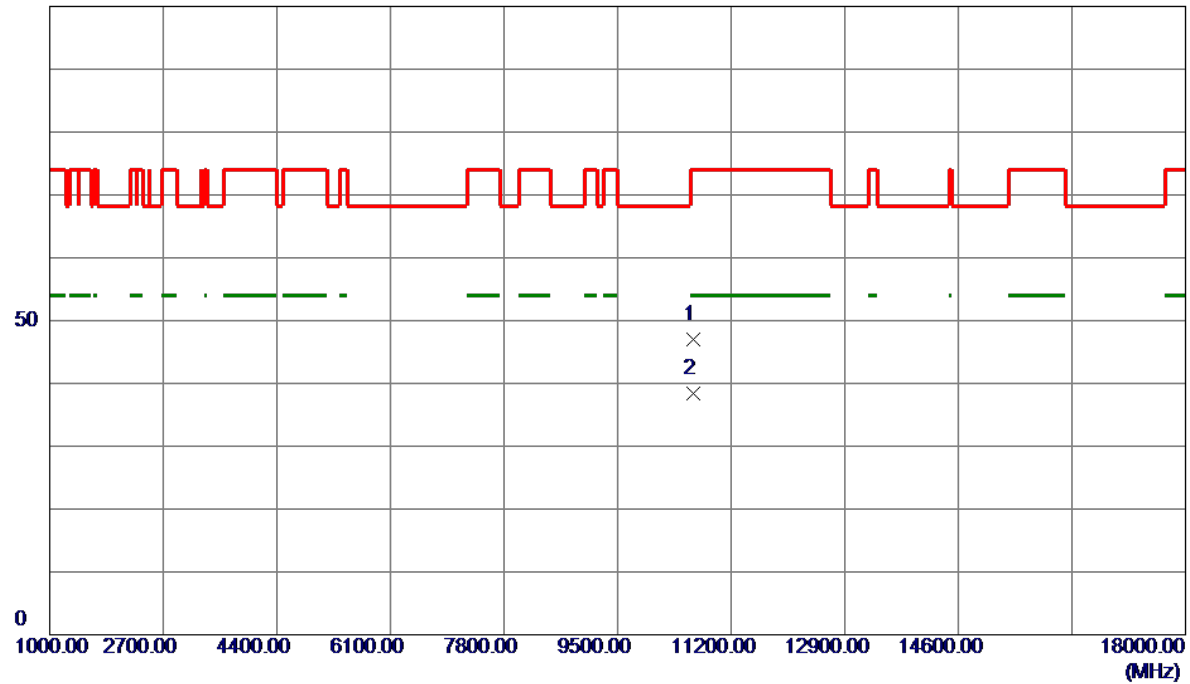


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10632.0250	37.78	9.28	47.06	74.00	-26.94	Peak	
2 *	10640.0250	29.08	9.28	38.36	54.00	-15.64	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE40) Mode 5270 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

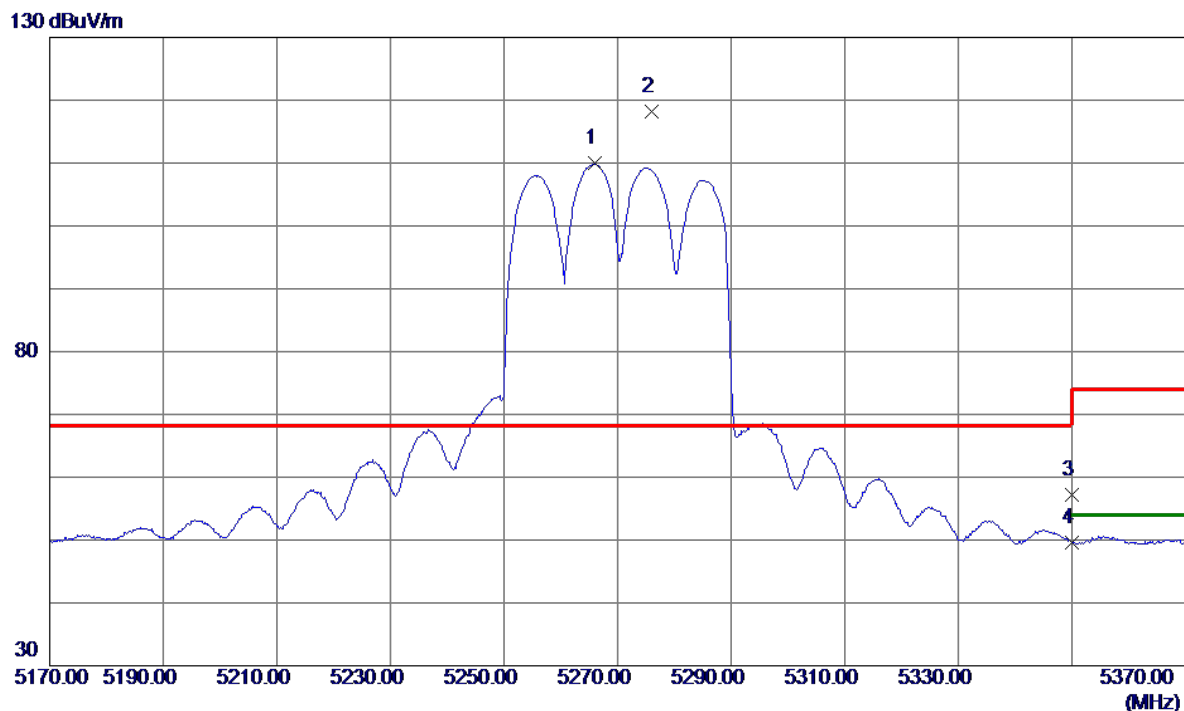


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5266.1000	96.12	13.80	109.92	999.00	-889.08	AVG	No Limit
2 *	5276.0000	104.30	13.82	118.12	68.20	49.92	Peak	No Limit
3	5350.0000	43.25	13.97	57.22	74.00	-16.78	Peak	
4	5350.0000	35.54	13.97	49.51	54.00	-4.49	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE40) Mode 5270 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

100 dBuV/m

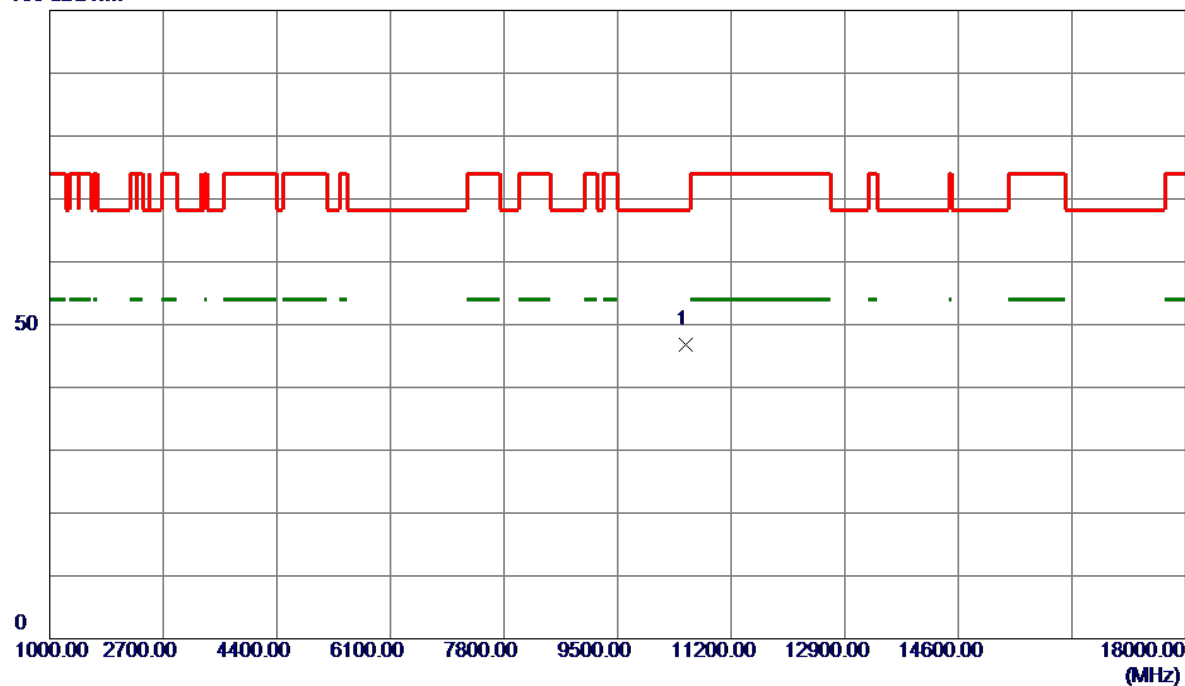


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10529.2500	37.44	9.29	46.73	68.20	-21.47	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE40) Mode 5310 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

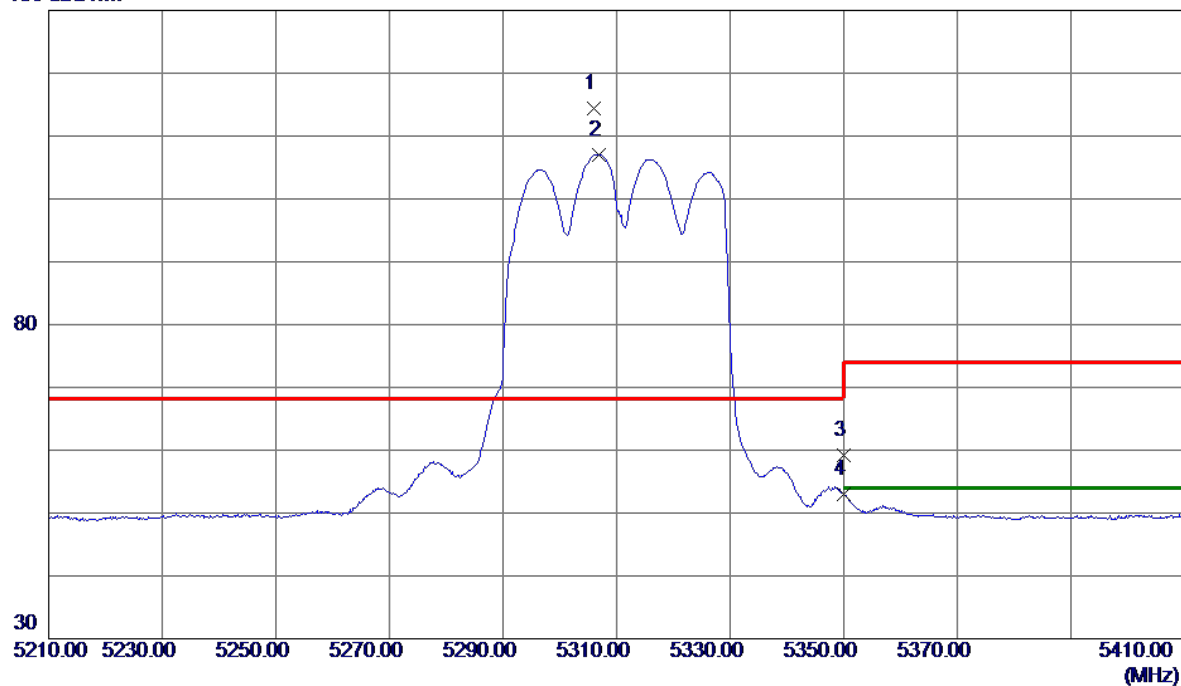


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5306.0000	100.43	13.88	114.31	68.20	46.11	Peak	No Limit
2	5306.9000	93.15	13.89	107.04	999.00	-891.96	AVG	No Limit
3	5350.0000	45.28	13.97	59.25	74.00	-14.75	Peak	
4	5350.0000	38.98	13.97	52.95	54.00	-1.05	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE40) Mode 5310 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

100 dBuV/m

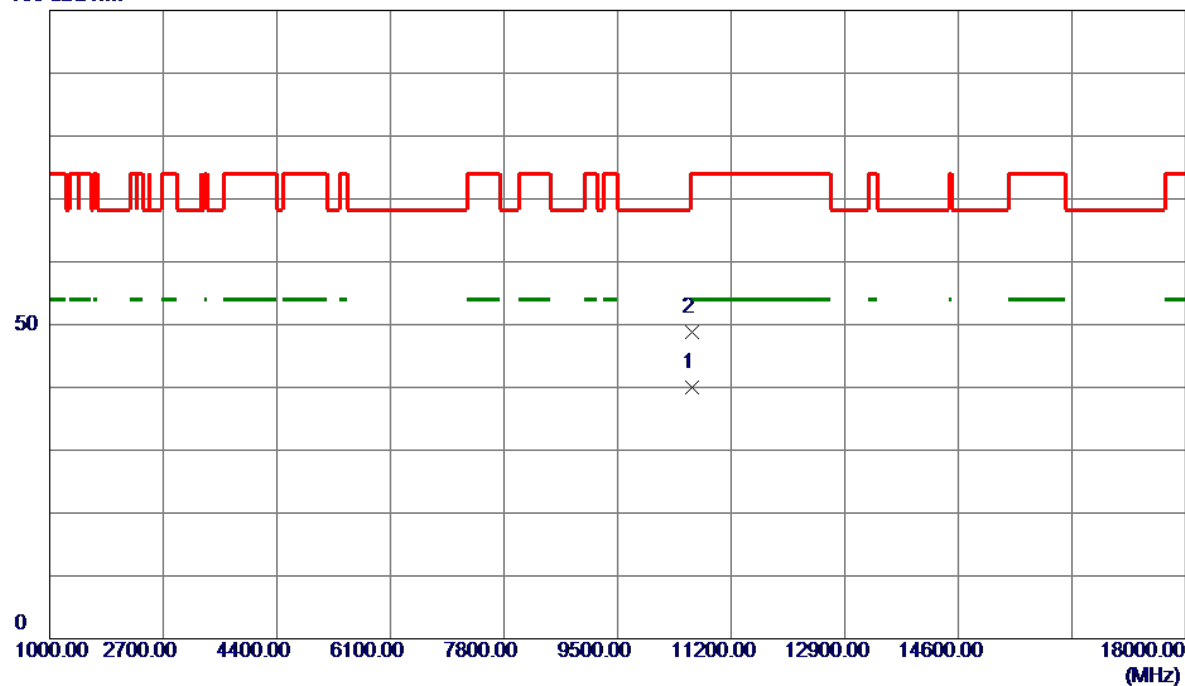


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10619.8750	30.67	9.28	39.95	54.00	-14.05	AVG	
2	10622.5000	39.56	9.28	48.84	74.00	-25.16	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE80) Mode 5290 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

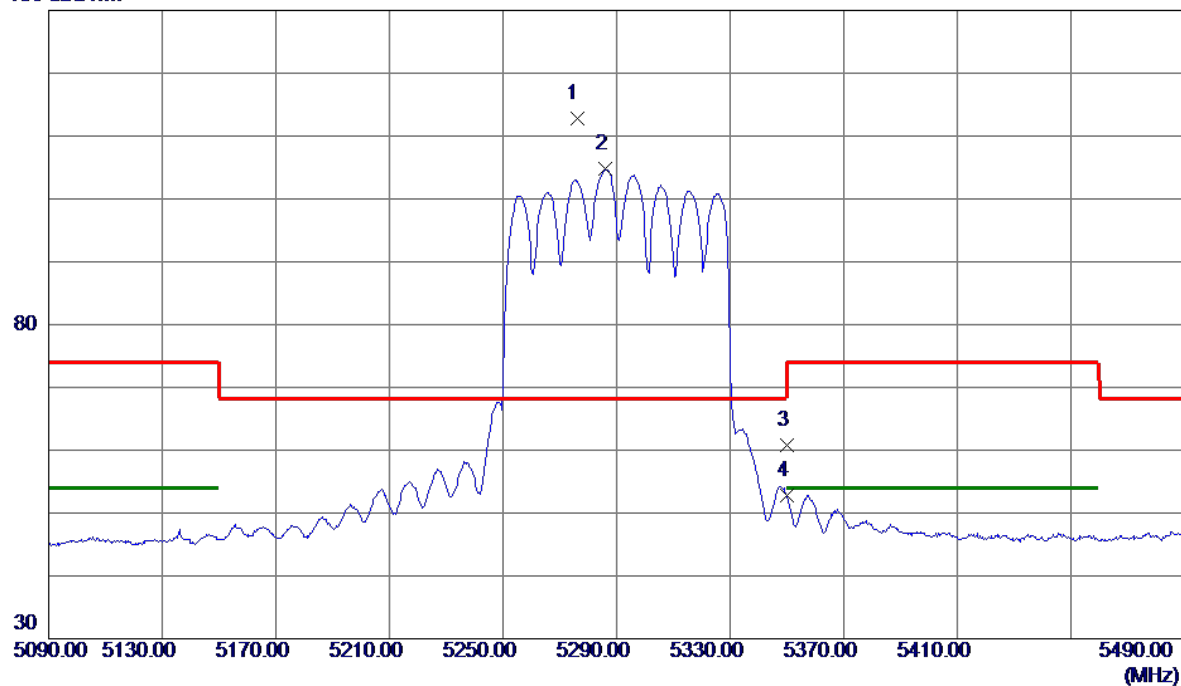


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5276.0000	98.96	13.82	112.78	68.20	44.58	Peak	No Limit
2	5286.2000	90.88	13.84	104.72	999.00	-894.28	AVG	No Limit
3	5350.0000	46.91	13.97	60.88	74.00	-13.12	Peak	
4	5350.0000	38.90	13.97	52.87	54.00	-1.13	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE80) Mode 5290 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

100 dBuV/m

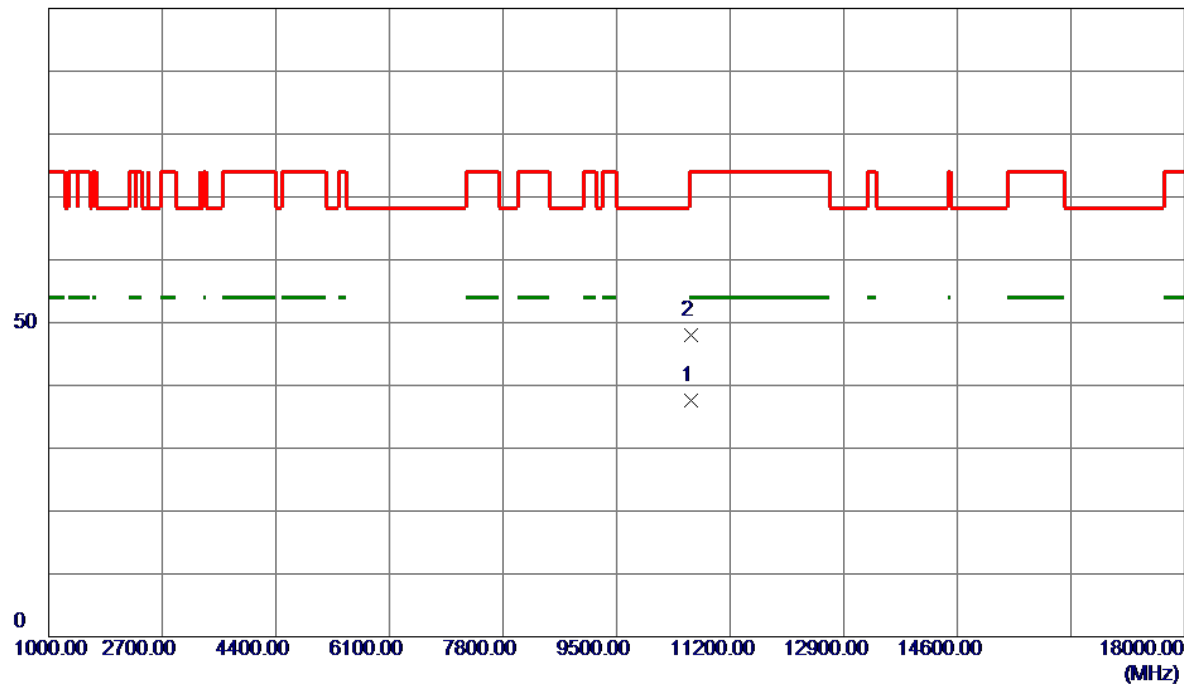


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10611.0000	28.25	9.28	37.53	54.00	-16.47	AVG	
2	10611.1000	38.74	9.28	48.02	74.00	-25.98	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1+UNII-2A_TX AC(VHT160) Mode 5250 MHz	Polarization	Vertical
-----------	--	--------------	----------

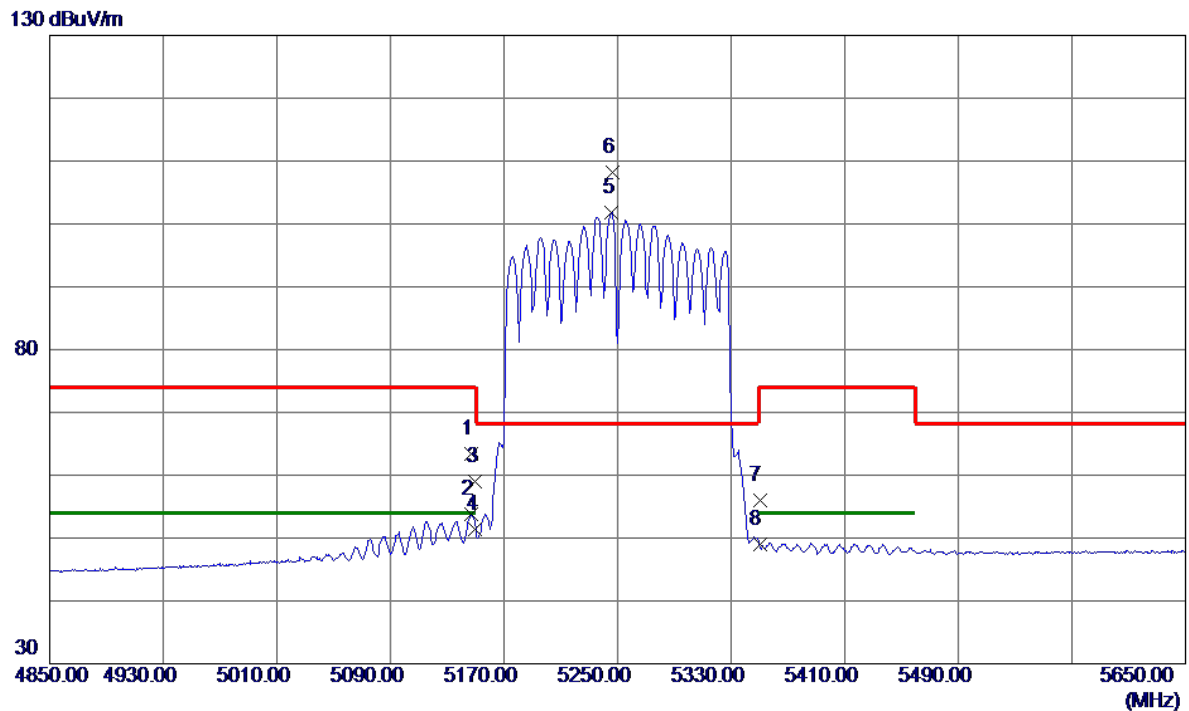


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5147.2000	49.88	13.55	63.43	74.00	-10.57	Peak	
2	5147.2000	40.22	13.55	53.77	54.00	-0.23	AVG	
3	5150.0000	45.48	13.56	59.04	74.00	-14.96	Peak	
4	5150.0000	37.85	13.56	51.41	54.00	-2.59	AVG	
5	5246.0000	94.97	13.76	101.73	999.00	-897.27	AVG	No Limit
6 *	5246.8000	94.50	13.76	108.26	68.20	40.06	Peak	No Limit
7	5350.0000	42.00	13.97	55.97	74.00	-18.03	Peak	
8	5350.0000	34.94	13.97	48.91	54.00	-5.09	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1+UNII-2A_TX AC(VHT160) Mode 5250 MHz	Polarization	Vertical
-----------	--	--------------	----------

100 dBuV/m

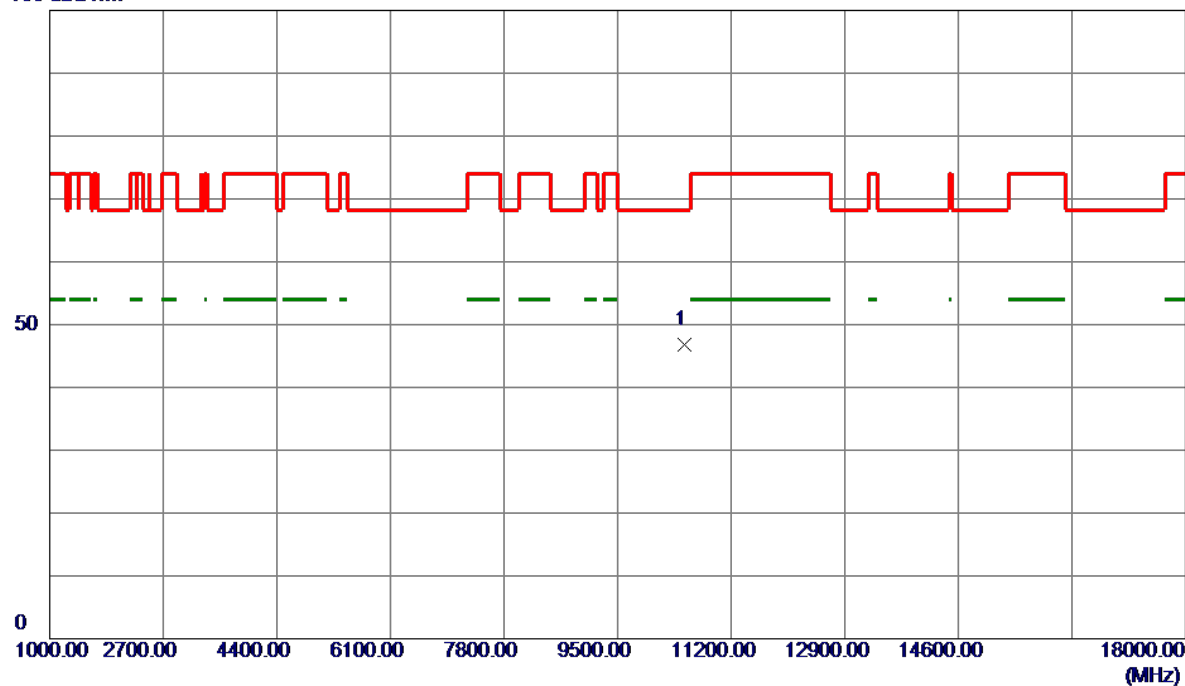


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10509.6000	37.46	9.29	46.75	68.20	-21.45	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1+UNII-2A_TX AX(HE160) Mode 5250 MHz	Polarization	Vertical
-----------	---	--------------	----------

130 dBuV/m

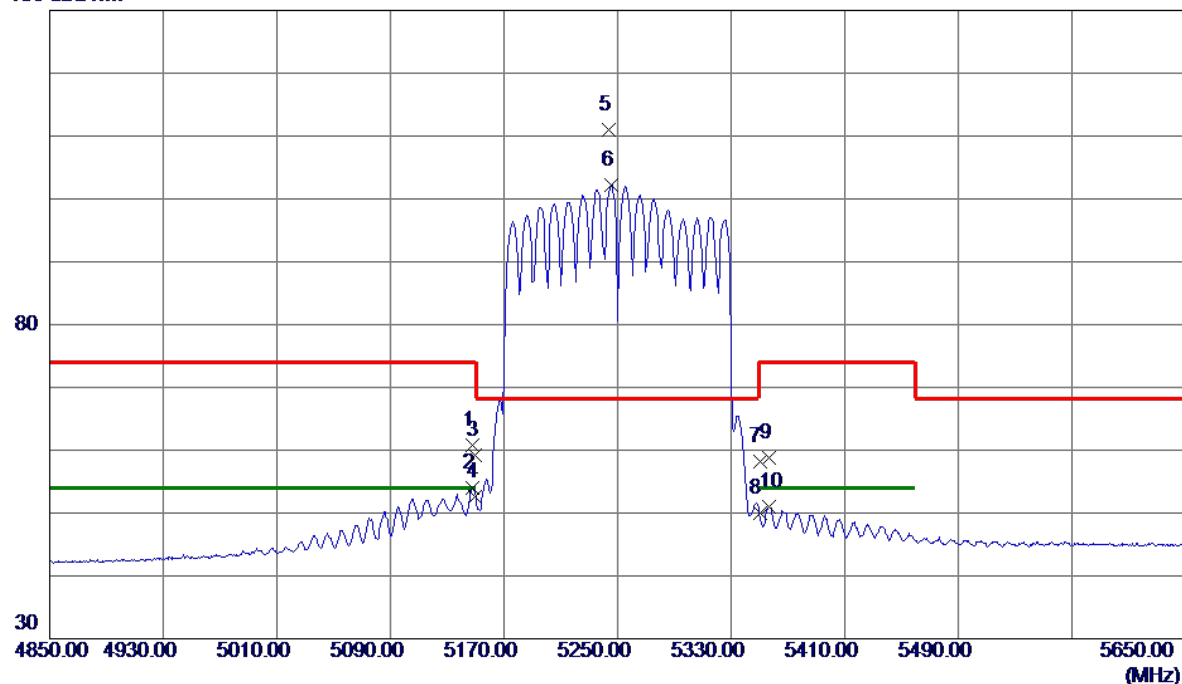


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5147.6000	47.15	13.56	60.71	74.00	-13.29	Peak	
2	5147.6000	40.39	13.56	53.95	54.00	-0.05	AVG	
3	5150.0000	45.65	13.56	59.21	74.00	-14.79	Peak	
4	5150.0000	38.99	13.56	52.55	54.00	-1.45	AVG	
5 *	5243.6000	97.29	13.75	111.04	68.20	42.84	Peak	No Limit
6	5245.6000	88.46	13.76	102.22	999.00	-896.78	AVG	No Limit
7	5350.0000	44.22	13.97	58.19	74.00	-15.81	Peak	
8	5350.0000	36.00	13.97	49.97	54.00	-4.03	AVG	
9	5356.4000	44.89	13.99	58.88	74.00	-15.12	Peak	
10	5356.4000	36.98	13.99	50.97	54.00	-3.03	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1+UNII-2A_TX AX(HE160) Mode 5250 MHz	Polarization	Vertical
-----------	---	--------------	----------

100 dBuV/m

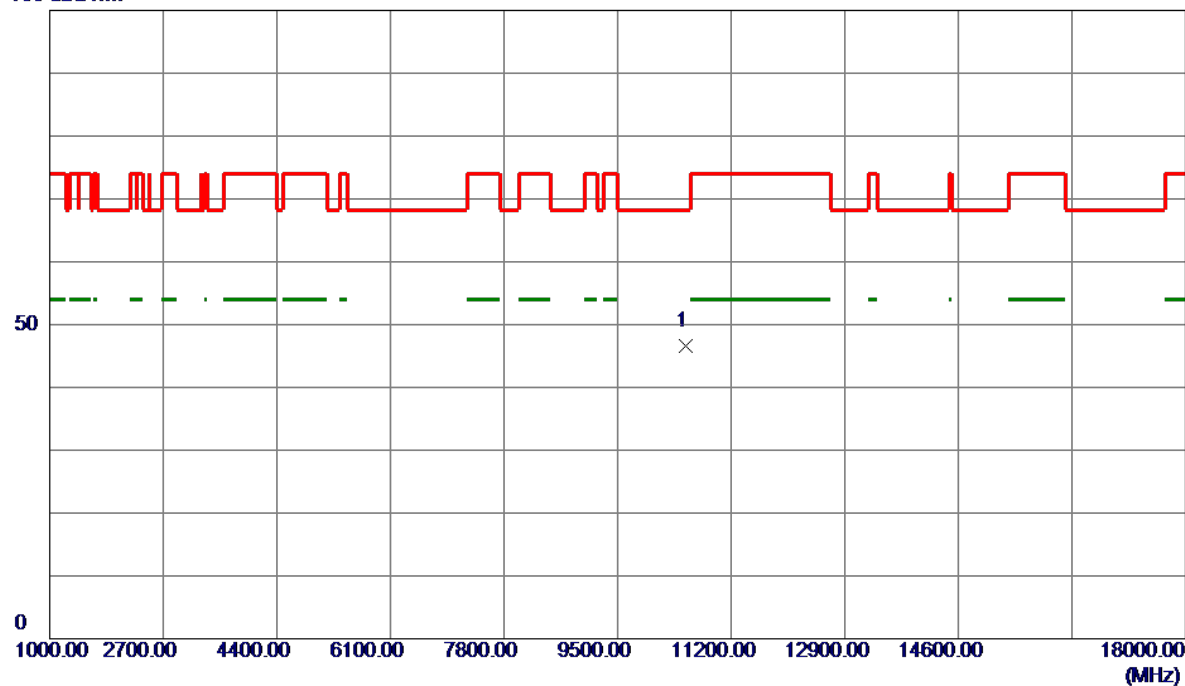


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10512.1000	37.37	9.29	46.66	68.20	-21.54	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

130 dBuV/m

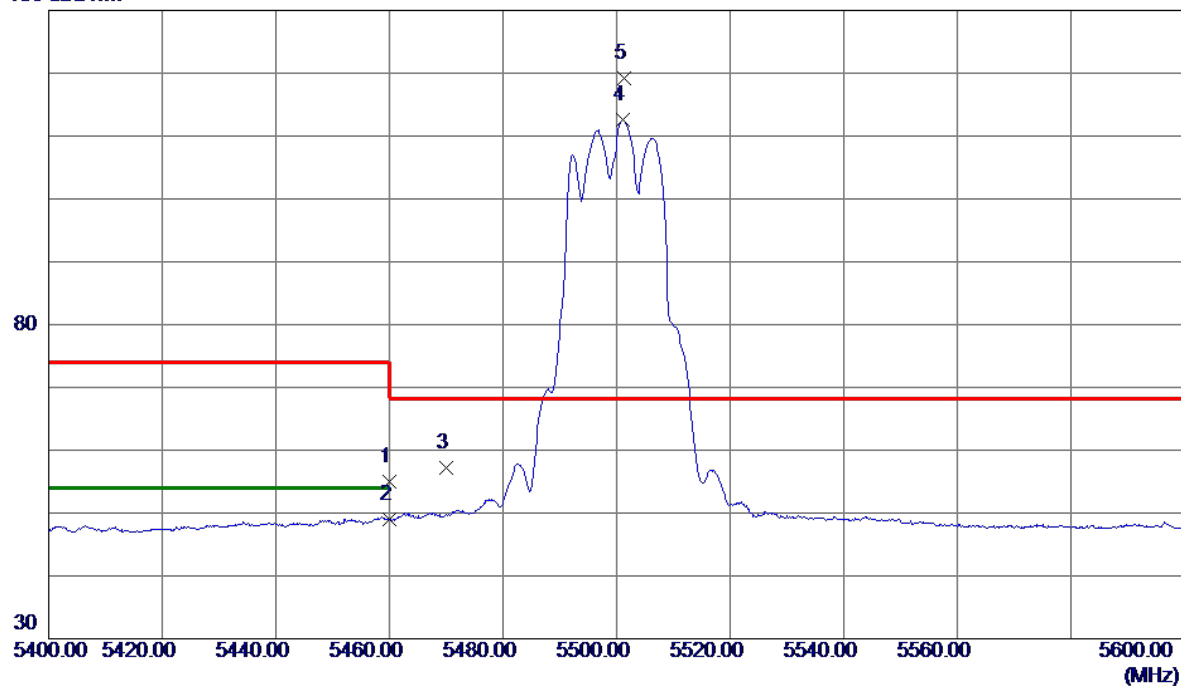


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	40.86	14.20	55.06	74.00	-18.94	Peak	
2	5460.0000	34.89	14.20	49.09	54.00	-4.91	AVG	
3	5470.0000	43.00	14.22	57.22	68.20	-10.98	Peak	
4	5501.1000	98.26	14.29	112.55	999.00	-886.45	AVG	No Limit
5 *	5501.3000	105.01	14.29	119.30	68.20	51.10	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

100 dBuV/m

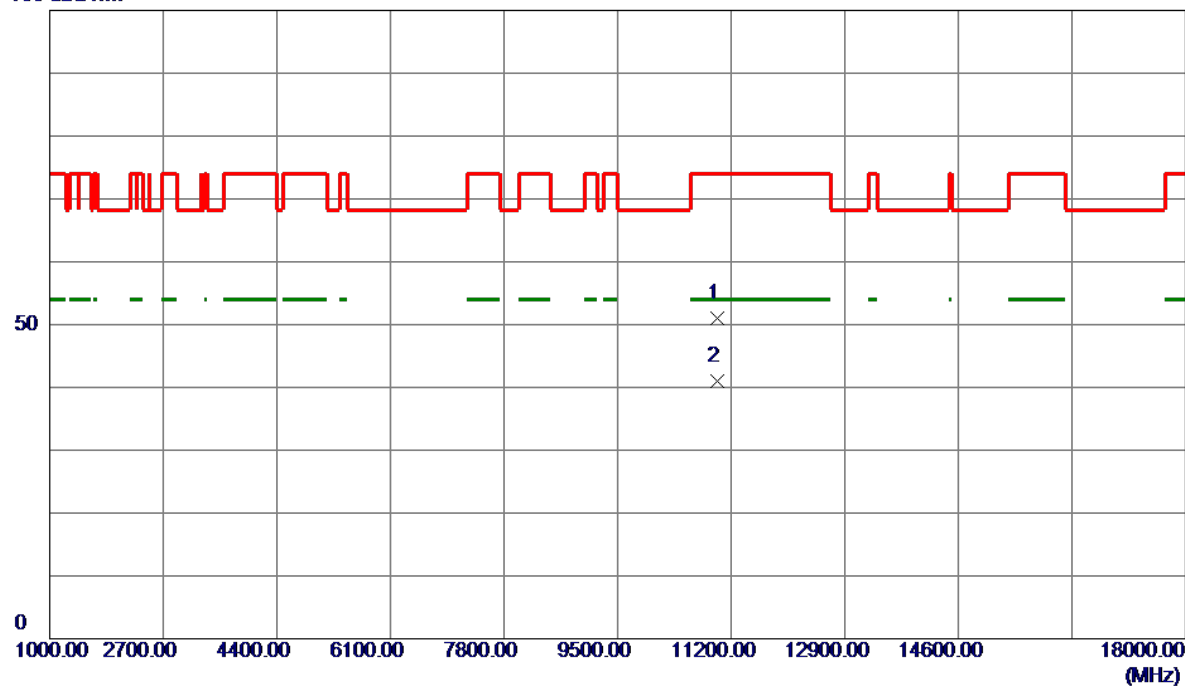


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.2000	41.83	9.26	51.09	74.00	-22.91	Peak	
2 *	11000.2500	31.70	9.26	40.96	54.00	-13.04	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5580 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

100 dBuV/m

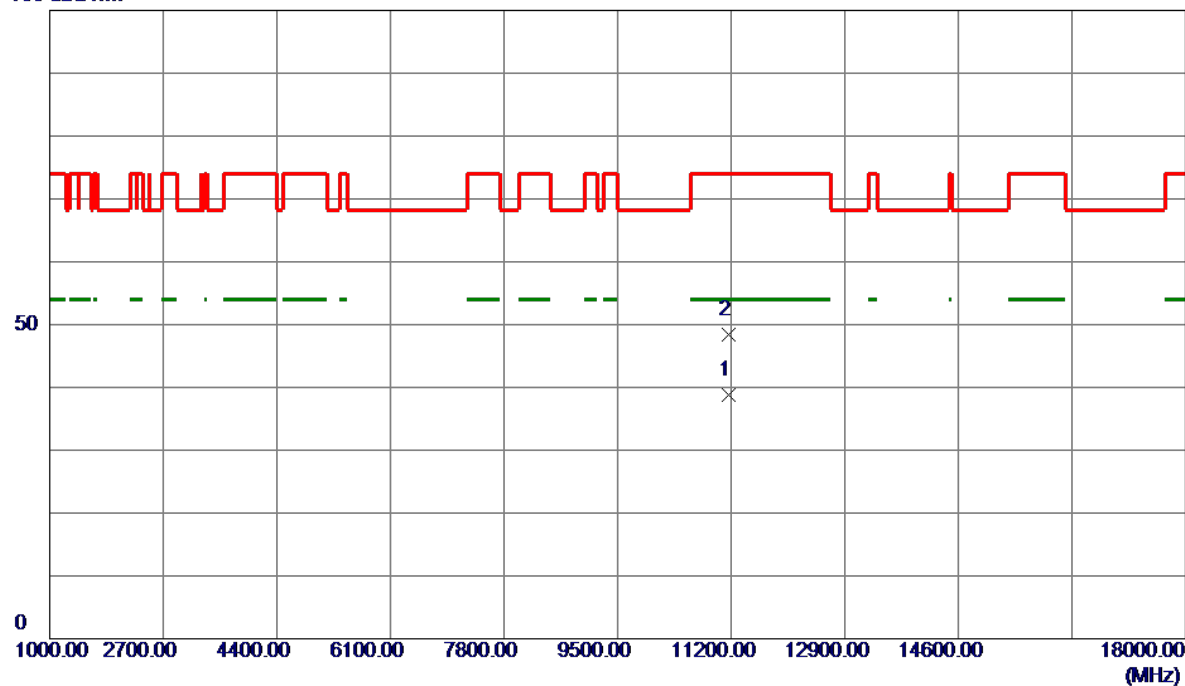


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11160.0500	29.49	9.39	38.88	54.00	-15.12	AVG	
2	11160.4000	38.93	9.39	48.32	74.00	-25.68	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

130 dBuV/m

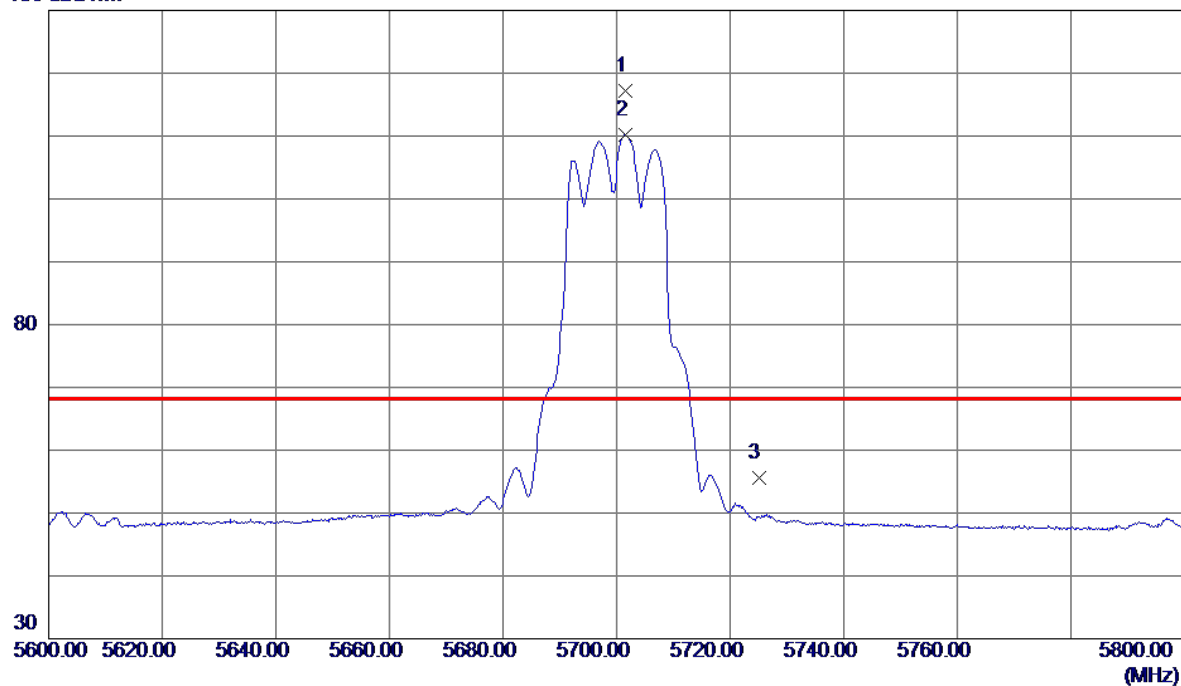


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5701.6000	102.32	14.92	117.24	68.20	49.04	Peak	No Limit
2	5701.6000	95.24	14.92	110.16	999.00	-888.84	AVG	No Limit
3	5725.0000	40.55	15.00	55.55	68.20	-12.65	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

100 dBuV/m

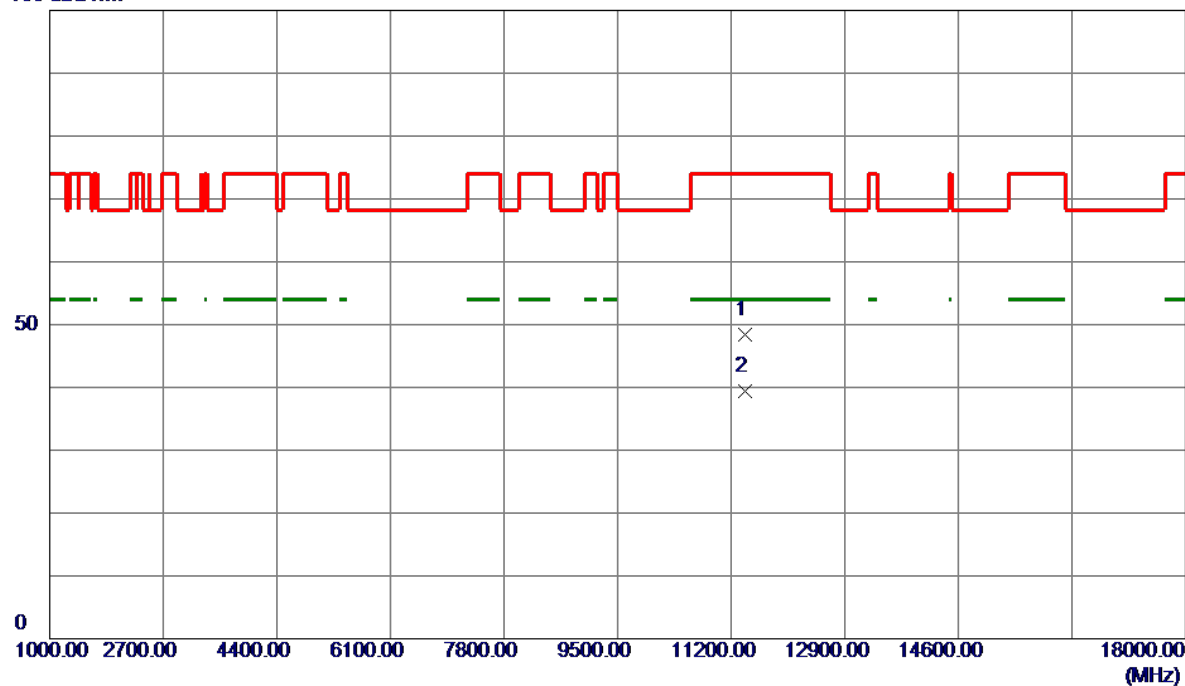


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11400.1250	38.83	9.59	48.42	74.00	-25.58	Peak	
2 *	11400.2250	29.75	9.59	39.34	54.00	-14.66	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5500 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

130 dBuV/m

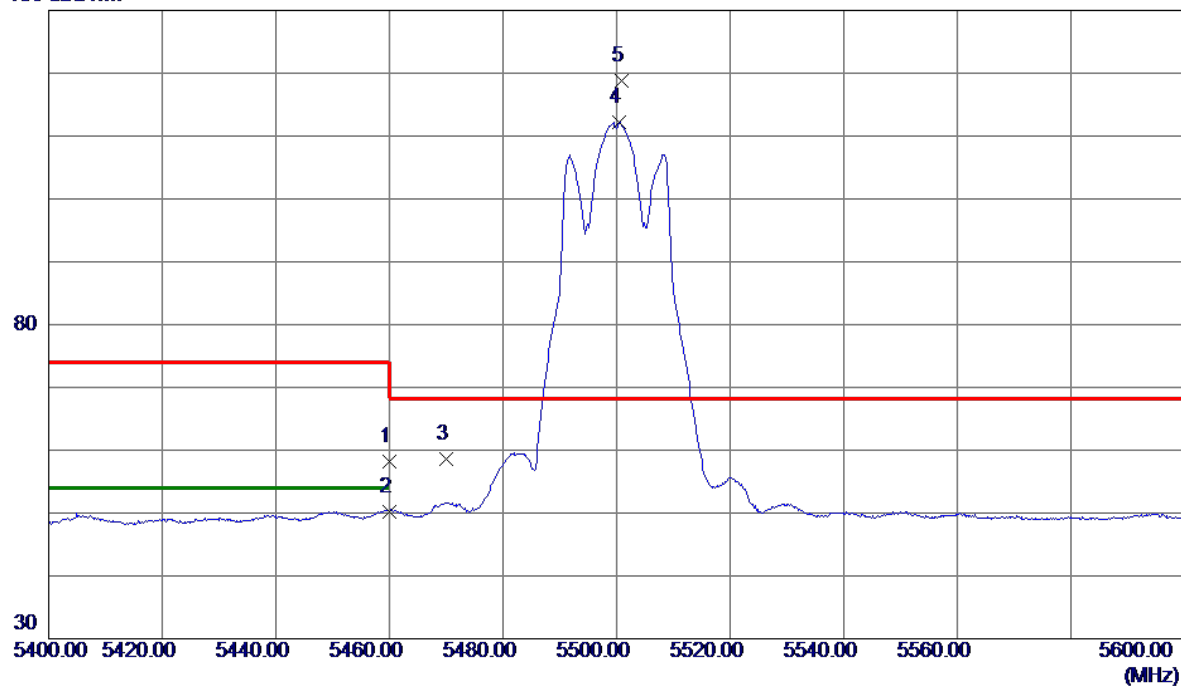


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	43.94	14.20	58.14	74.00	-15.86	Peak	
2	5460.0000	36.06	14.20	50.26	54.00	-3.74	AVG	
3	5470.0000	44.45	14.22	58.67	68.20	-9.53	Peak	
4	5500.5000	97.86	14.29	112.15	999.00	-886.85	AVG	No Limit
5 *	5500.9000	104.49	14.29	118.78	68.20	50.58	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5500 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

100 dBuV/m

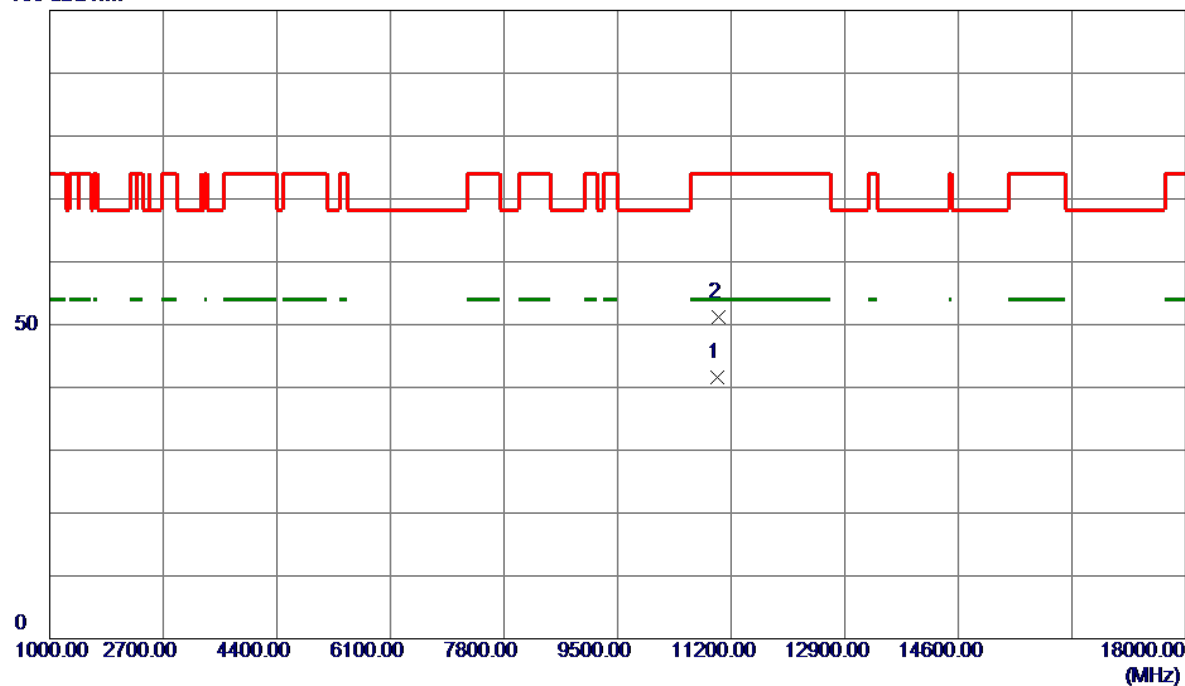


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11000.0000	32.30	9.26	41.56	54.00	-12.44	AVG	
2	11003.2500	42.03	9.26	51.29	74.00	-22.71	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5580 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

100 dBuV/m

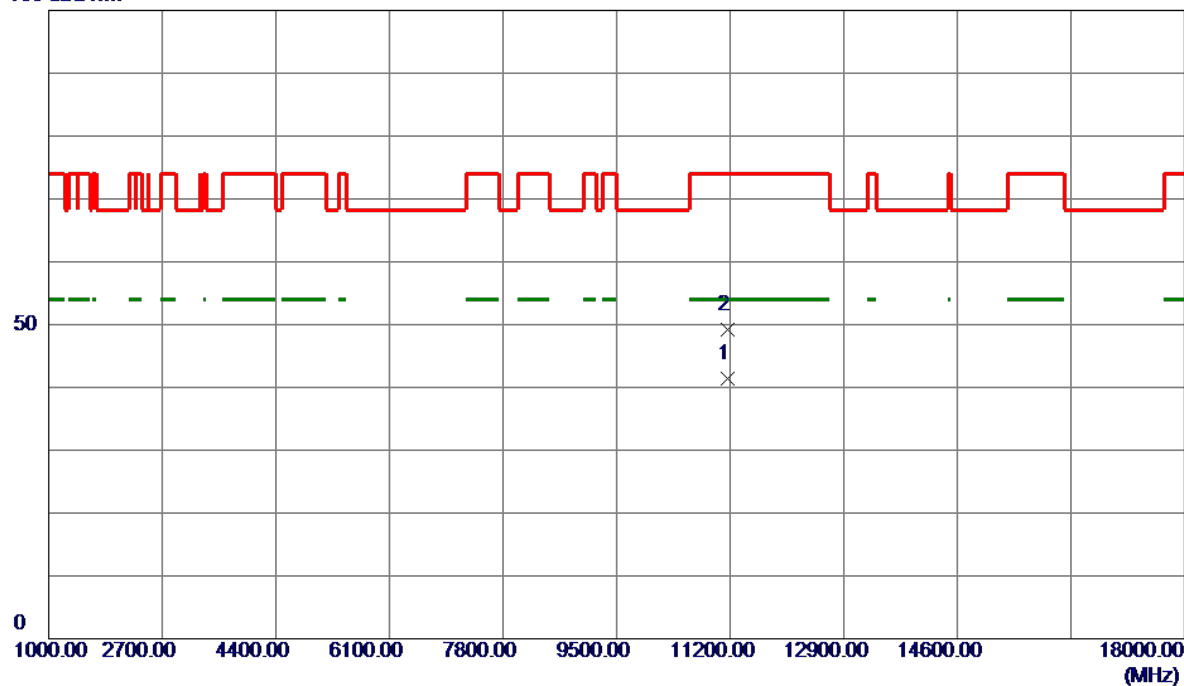


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11160.0000	31.96	9.39	41.35	54.00	-12.65	AVG	
2	11162.4000	39.87	9.39	49.26	74.00	-24.74	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

130 dBuV/m

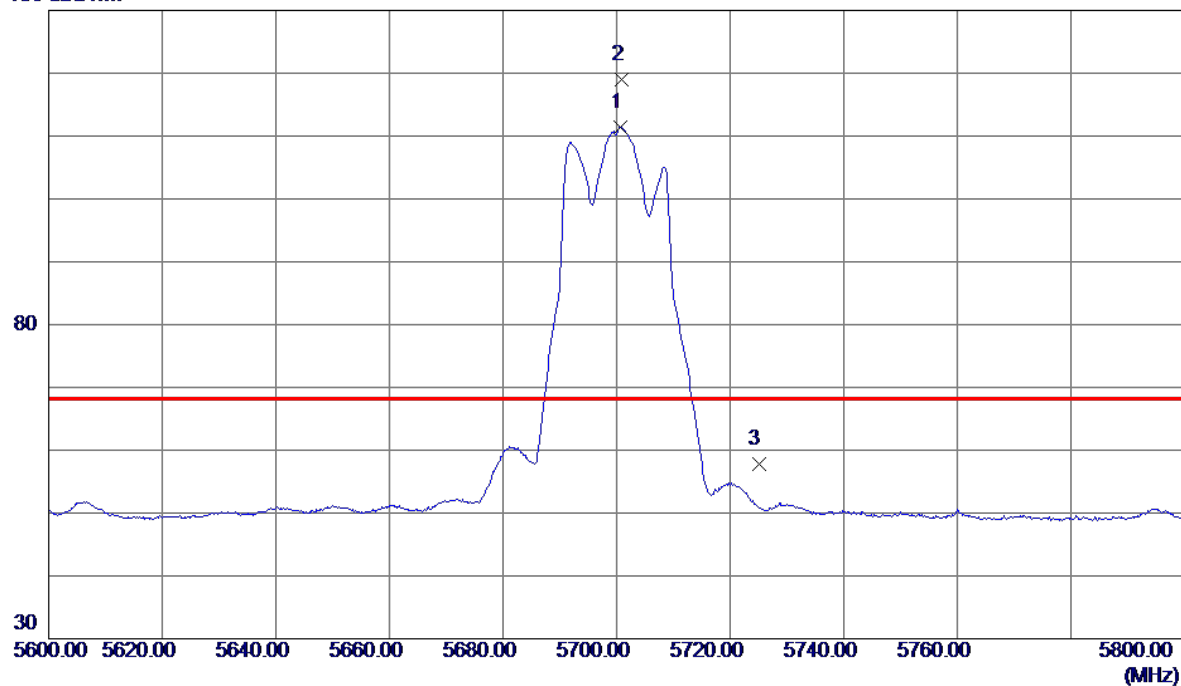


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5700.6000	96.46	14.92	111.38	999.00	-887.62	AVG	No Limit
2 *	5700.9000	104.08	14.92	119.00	68.20	50.80	Peak	No Limit
3	5725.0000	42.85	15.00	57.85	68.20	-10.35	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

100 dBuV/m

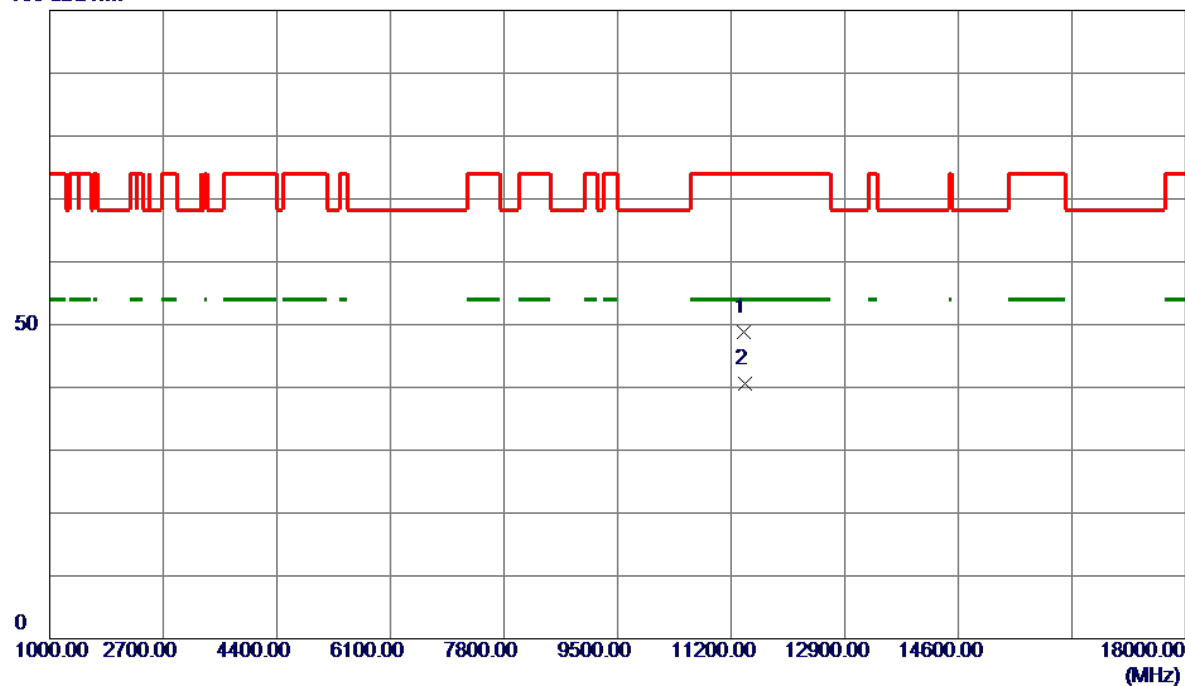


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11393.5000	39.18	9.59	48.77	74.00	-25.23	Peak	
2 *	11399.9500	30.99	9.59	40.58	54.00	-13.42	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

130 dBuV/m

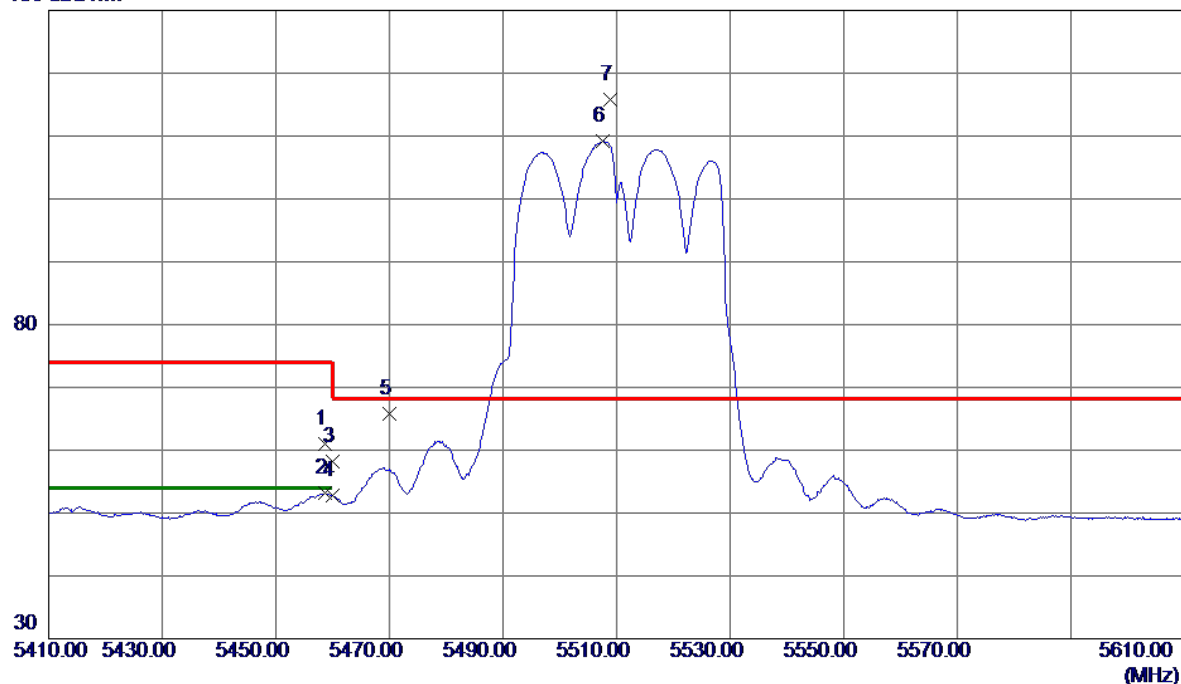


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5458.6000	46.78	14.20	60.98	74.00	-13.02	Peak	
2	5458.6000	38.91	14.20	53.11	54.00	-0.89	AVG	
3	5460.0000	43.91	14.20	58.11	74.00	-15.89	Peak	
4	5460.0000	38.53	14.20	52.73	54.00	-1.27	AVG	
5	5470.0000	51.58	14.22	65.80	68.20	-2.40	Peak	
6	5507.6000	94.85	14.31	109.16	999.00	-889.84	AVG	No Limit
7 *	5508.9000	101.50	14.31	115.81	68.20	47.61	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

100 dBuV/m

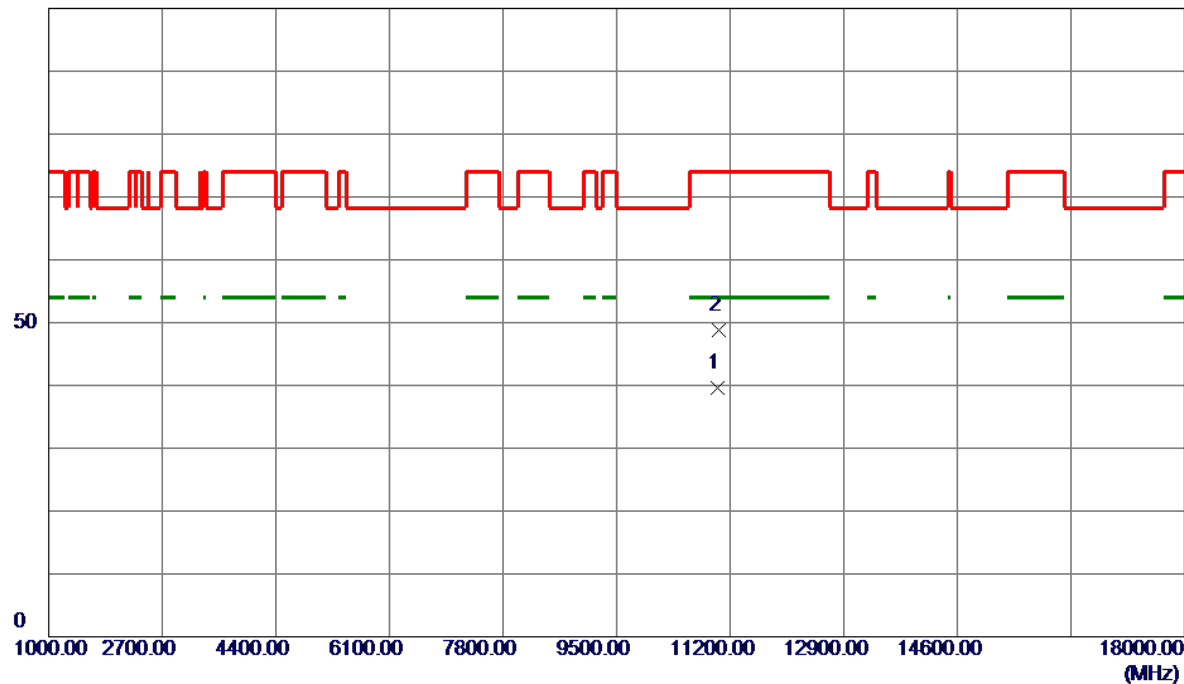


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11020.2500	30.32	9.28	39.60	54.00	-14.40	AVG	
2	11021.2500	39.43	9.28	48.71	74.00	-25.29	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5550 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

100 dBuV/m

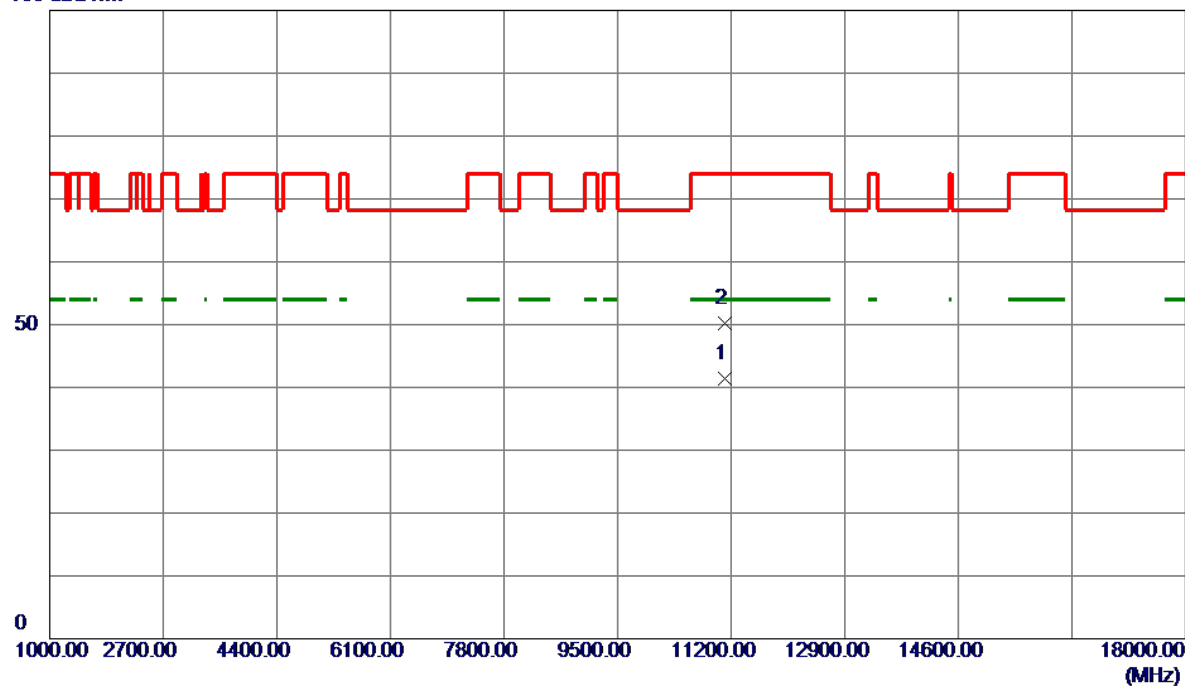


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11099.9500	32.12	9.34	41.46	54.00	-12.54	AVG	
2	11111.6500	40.82	9.35	50.17	74.00	-23.83	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

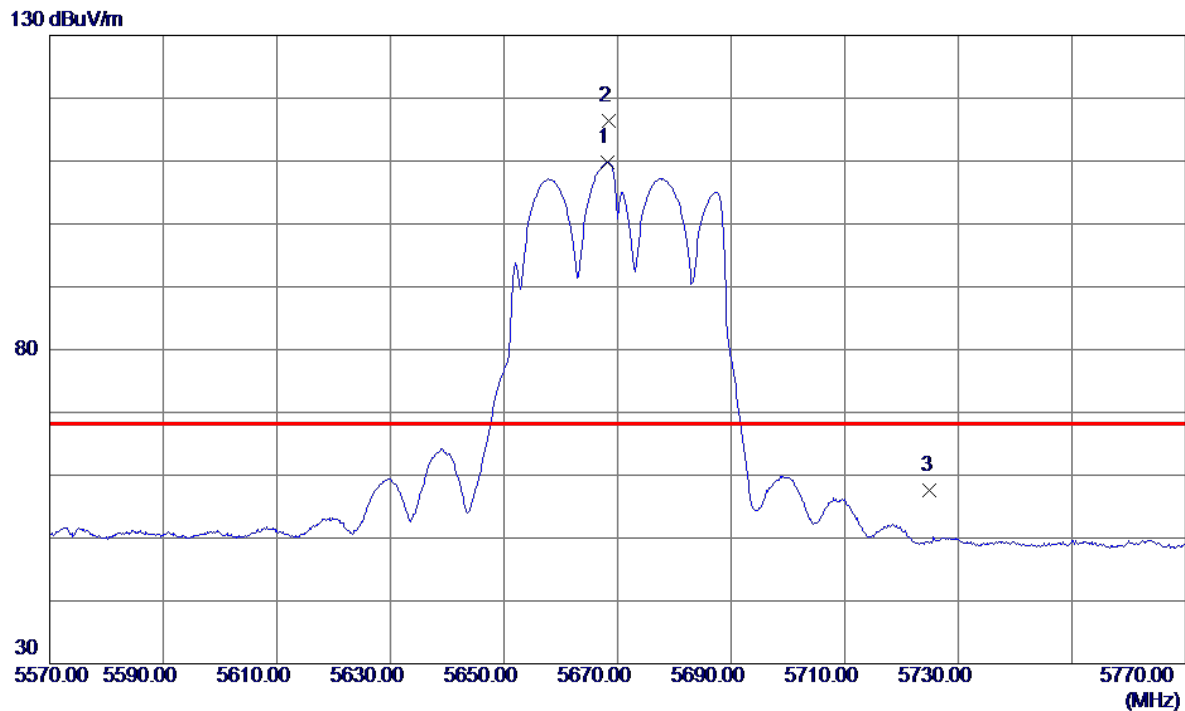


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5668.2000	94.94	14.82	109.76	999.00	-889.24	AVG	No Limit
2 *	5668.4000	101.52	14.82	116.34	68.20	48.14	Peak	No Limit
3	5725.0000	42.66	15.00	57.66	68.20	-10.54	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

100 dBuV/m

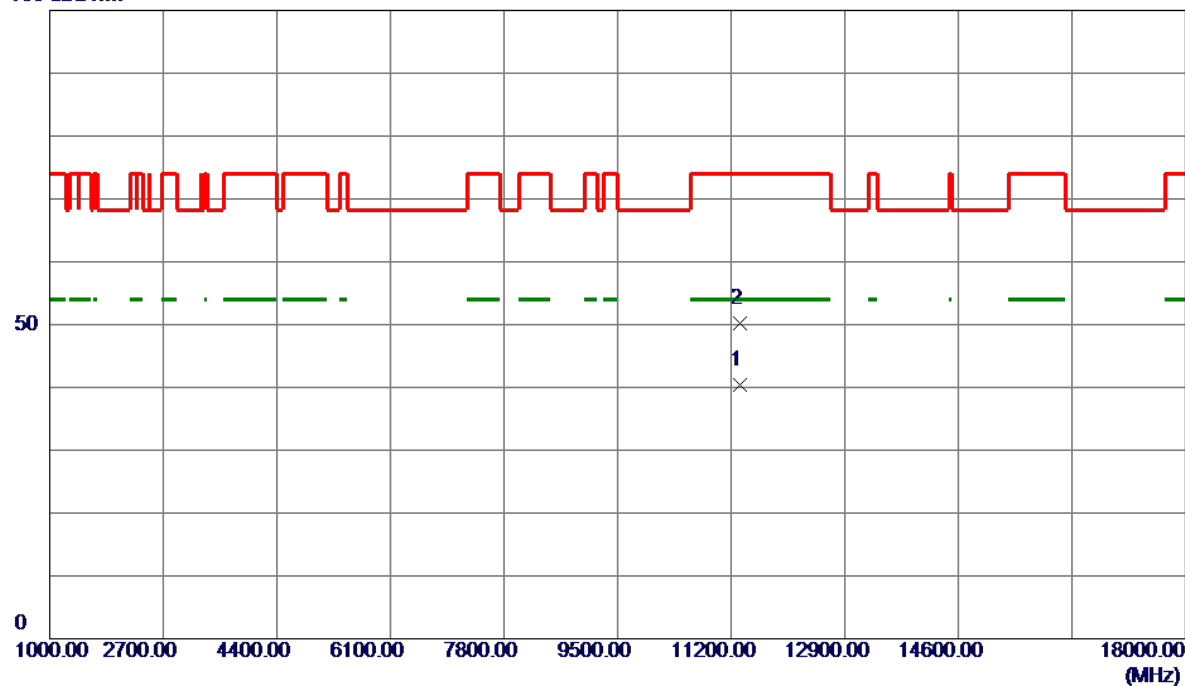


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11340.1500	30.90	9.54	40.44	54.00	-13.56	AVG	
2	11340.2500	40.64	9.54	50.18	74.00	-23.82	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

100 dBuV/m

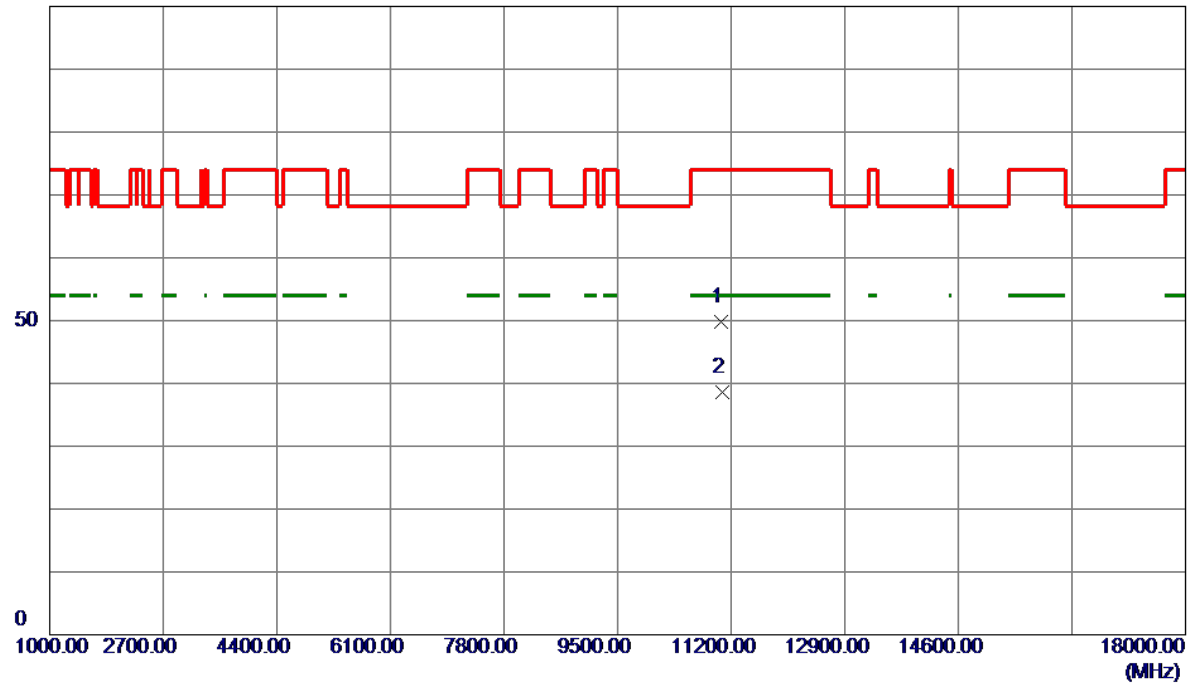


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11051.3500	40.52	9.30	49.82	74.00	-24.18	Peak	
2 *	11060.0500	29.31	9.31	38.62	54.00	-15.38	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

100 dBuV/m

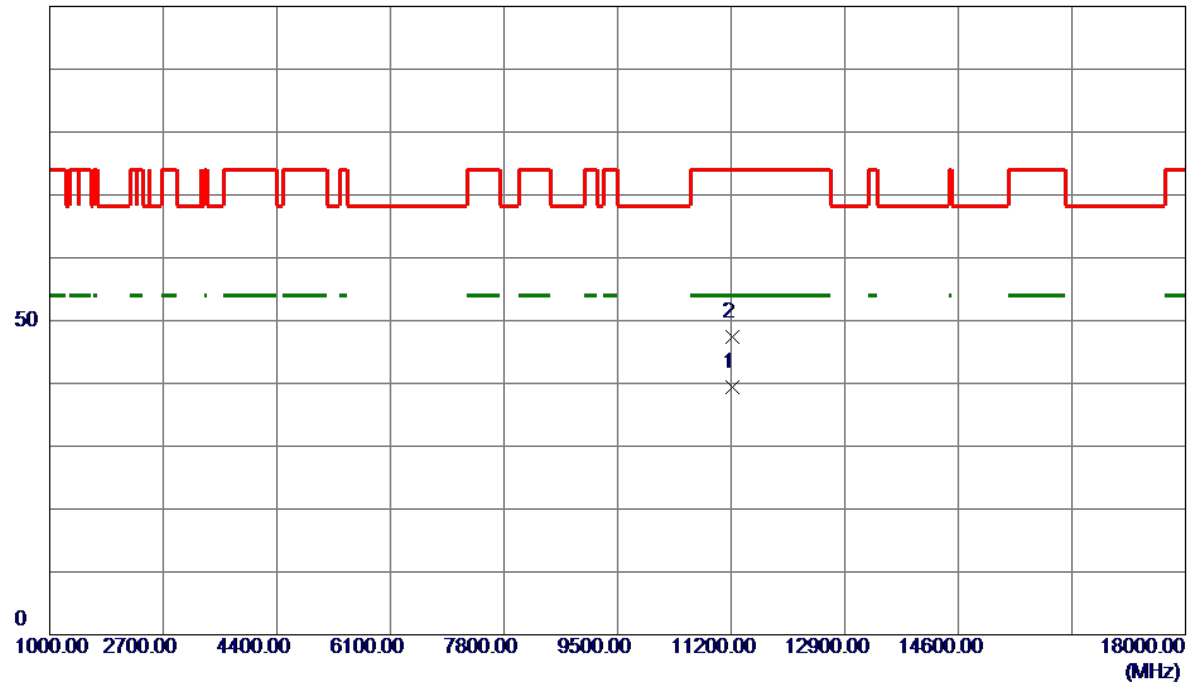


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11220.3000	29.97	9.44	39.41	54.00	-14.59	AVG	
2	11221.7000	38.04	9.44	47.48	74.00	-26.52	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT160) Mode 5570 MHz	Polarization	Vertical
-----------	-------------------------------------	--------------	----------

130 dBuV/m

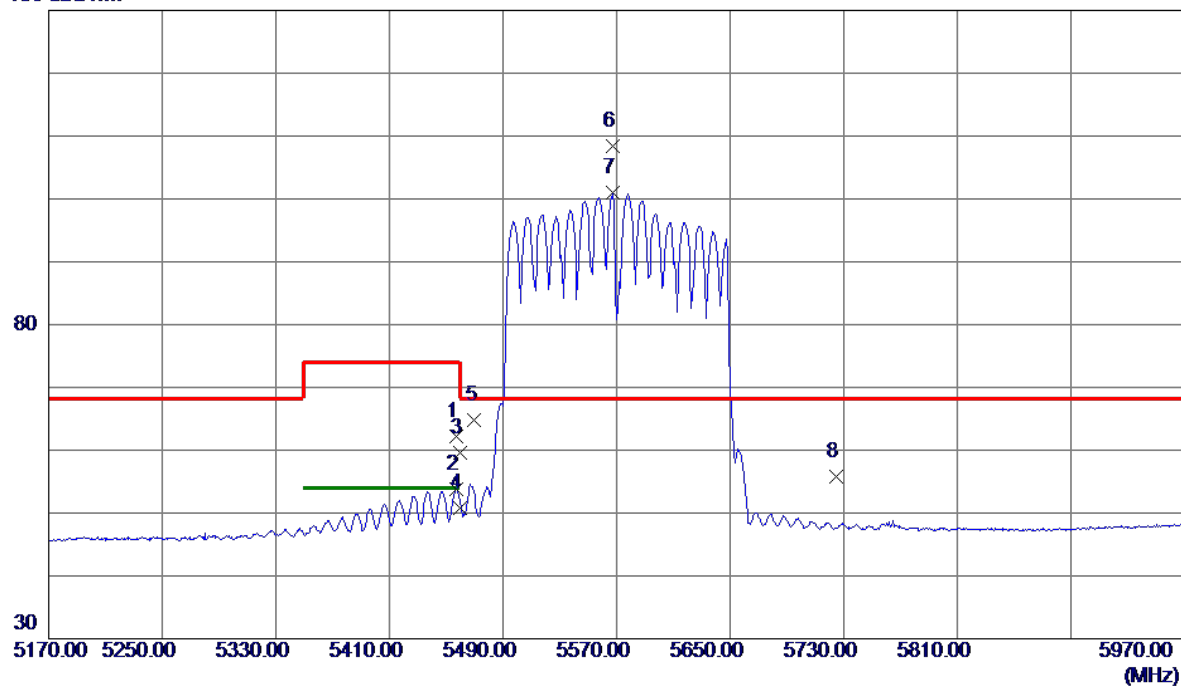


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5457.2000	48.00	14.20	62.20	74.00	-11.80	Peak	
2	5457.2000	39.57	14.20	53.77	54.00	-0.23	AVG	
3	5460.0000	45.39	14.20	59.59	74.00	-14.41	Peak	
4	5460.0000	36.68	14.20	50.88	54.00	-3.12	AVG	
5	5470.0000	50.53	14.22	64.75	68.20	-3.45	Peak	
6 *	5567.2000	93.91	14.50	108.41	68.20	40.21	Peak	No Limit
7	5567.6000	86.44	14.50	100.94	999.00	-898.06	AVG	No Limit
8	5725.0000	40.85	15.00	55.85	68.20	-12.35	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT160) Mode 5570 MHz	Polarization	Vertical
-----------	-------------------------------------	--------------	----------

100 dBuV/m

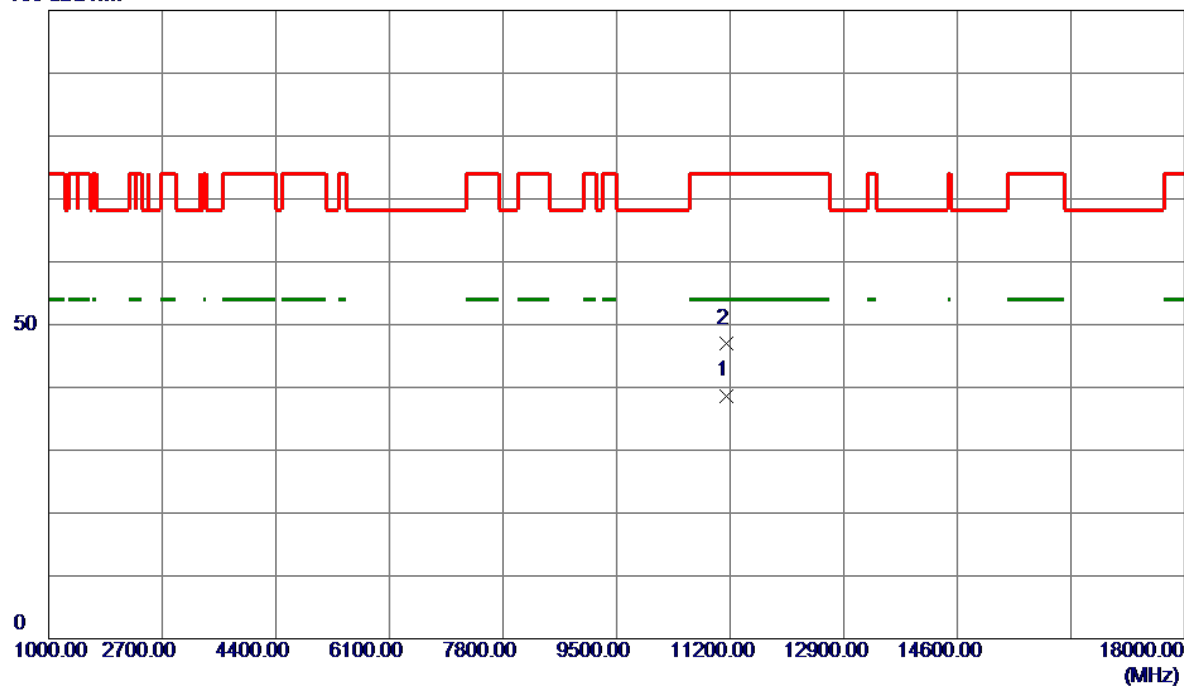


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11139.9850	29.32	9.38	38.70	54.00	-15.30	AVG	
2	11140.0900	37.59	9.38	46.97	74.00	-27.03	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5500 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

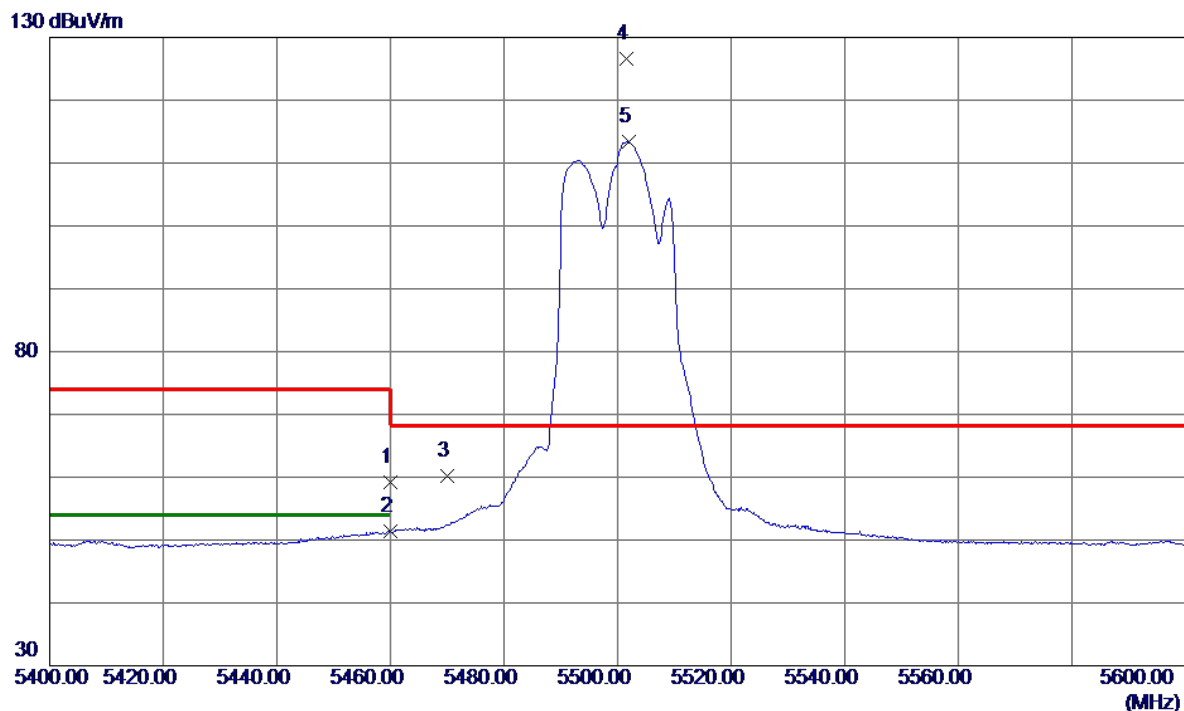


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	45.09	14.20	59.29	74.00	-14.71	Peak	
2	5460.0000	37.13	14.20	51.33	54.00	-2.67	AVG	
3	5470.0000	46.04	14.22	60.26	68.20	-7.94	Peak	
4 *	5501.5000	112.36	14.29	126.65	68.20	58.45	Peak	No Limit
5	5501.9000	99.10	14.29	113.39	999.00	-885.61	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5500 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

100 dBuV/m

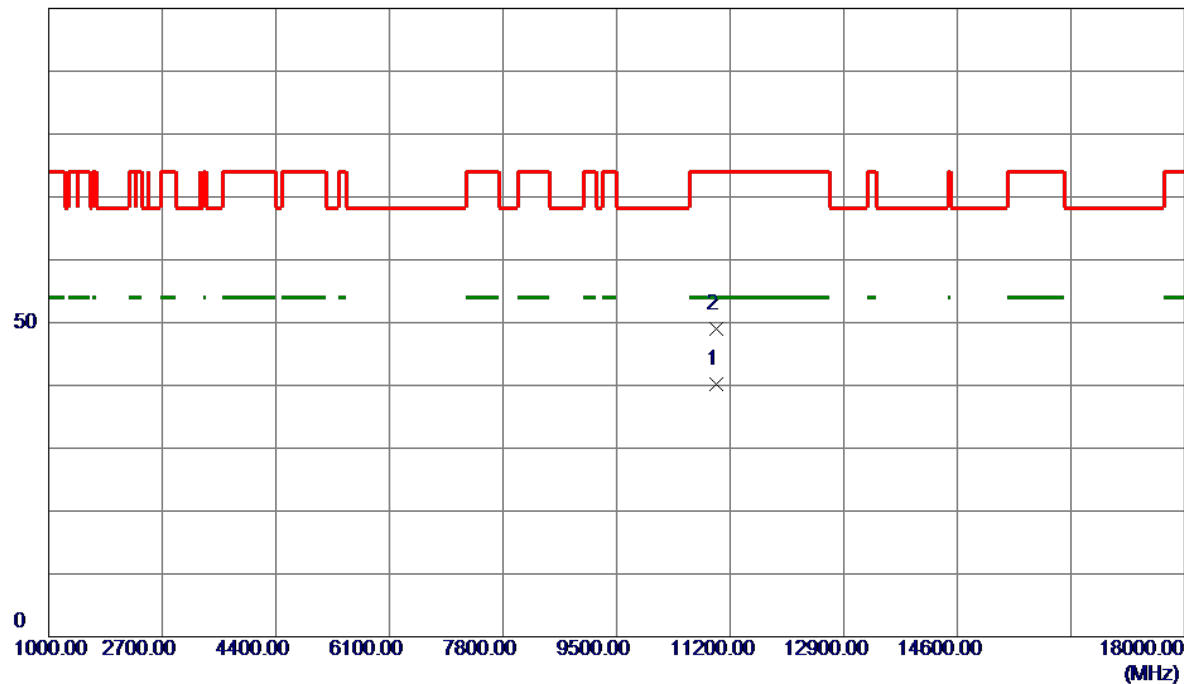


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10999.9000	31.00	9.26	40.26	54.00	-13.74	AVG	
2	11000.0500	39.68	9.26	48.94	74.00	-25.06	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5580 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

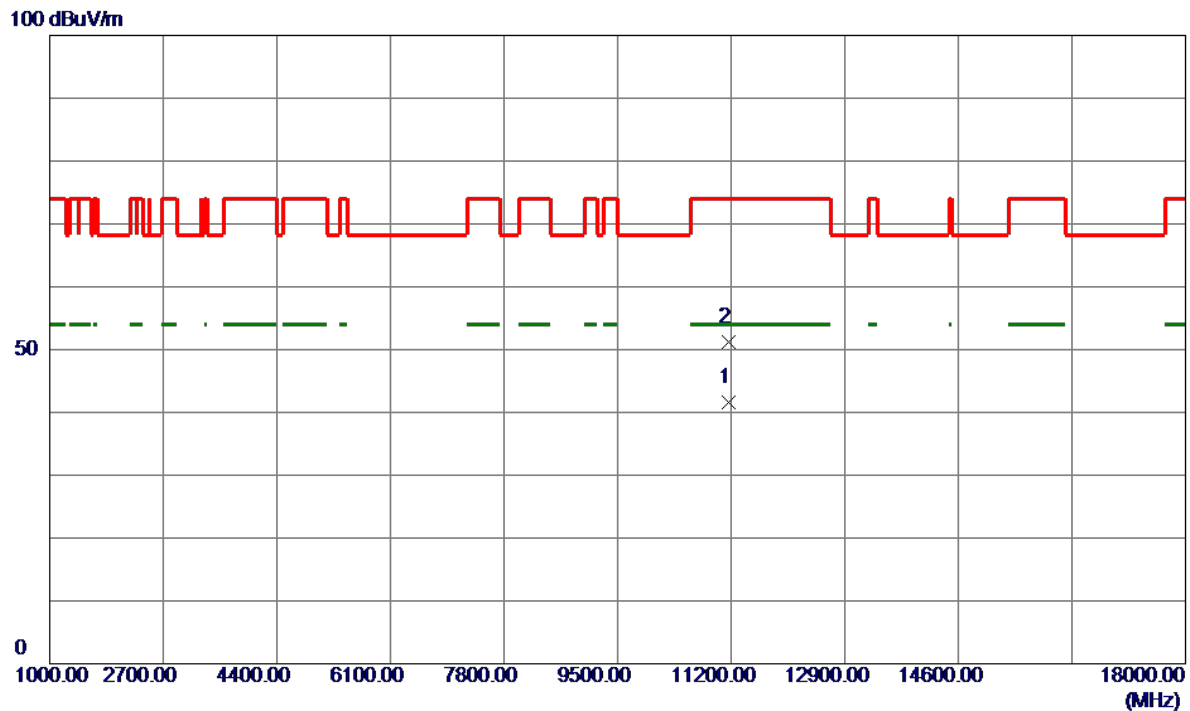


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11160.0300	32.16	9.39	41.55	54.00	-12.45	AVG	
2	11162.4400	41.73	9.39	51.12	74.00	-22.88	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5700 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

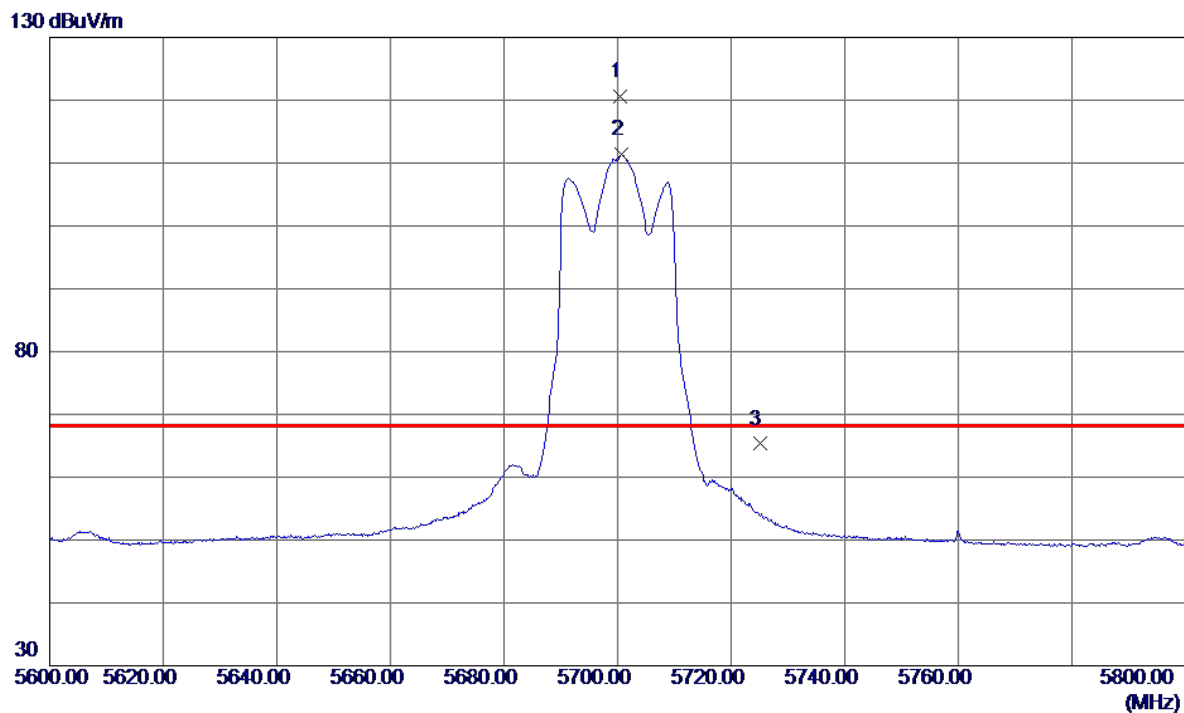


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5700.4000	105.71	14.92	120.63	68.20	52.43	Peak	No Limit
2	5700.6000	96.45	14.92	111.37	999.00	-887.63	AVG	No Limit
3	5725.0000	50.30	15.00	65.30	68.20	-2.90	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5700 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

100 dBuV/m

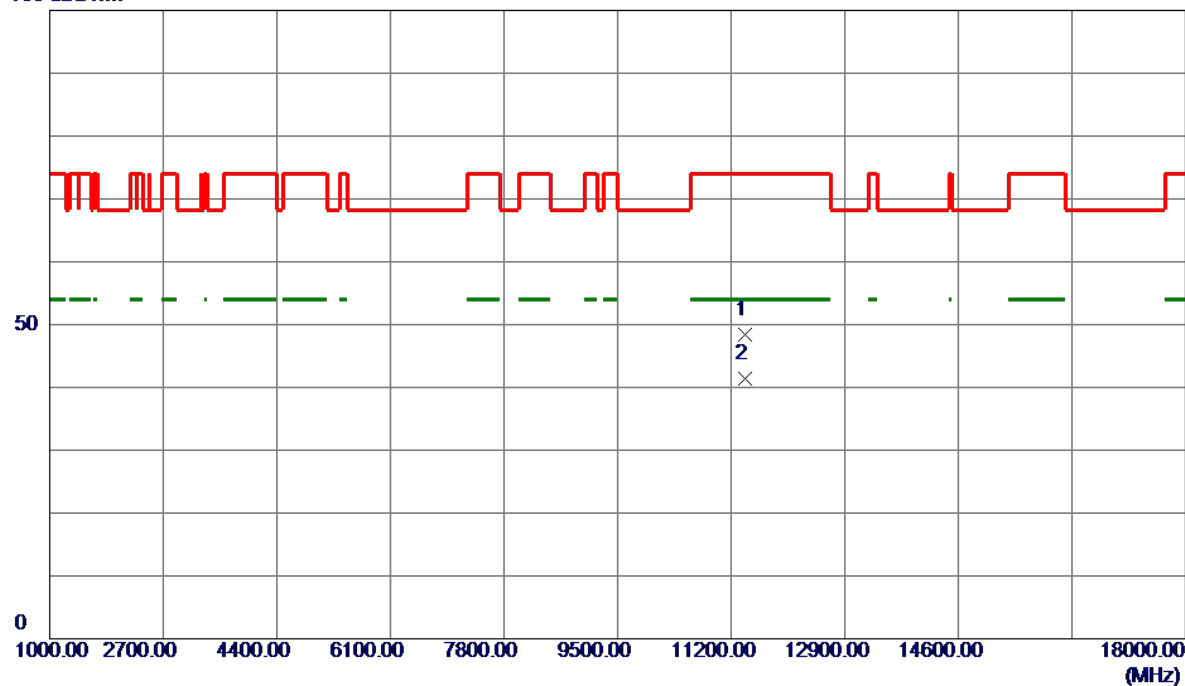


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11399.8200	38.78	9.59	48.37	74.00	-25.63	Peak	
2 *	11400.0199	31.79	9.59	41.38	54.00	-12.62	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5510 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

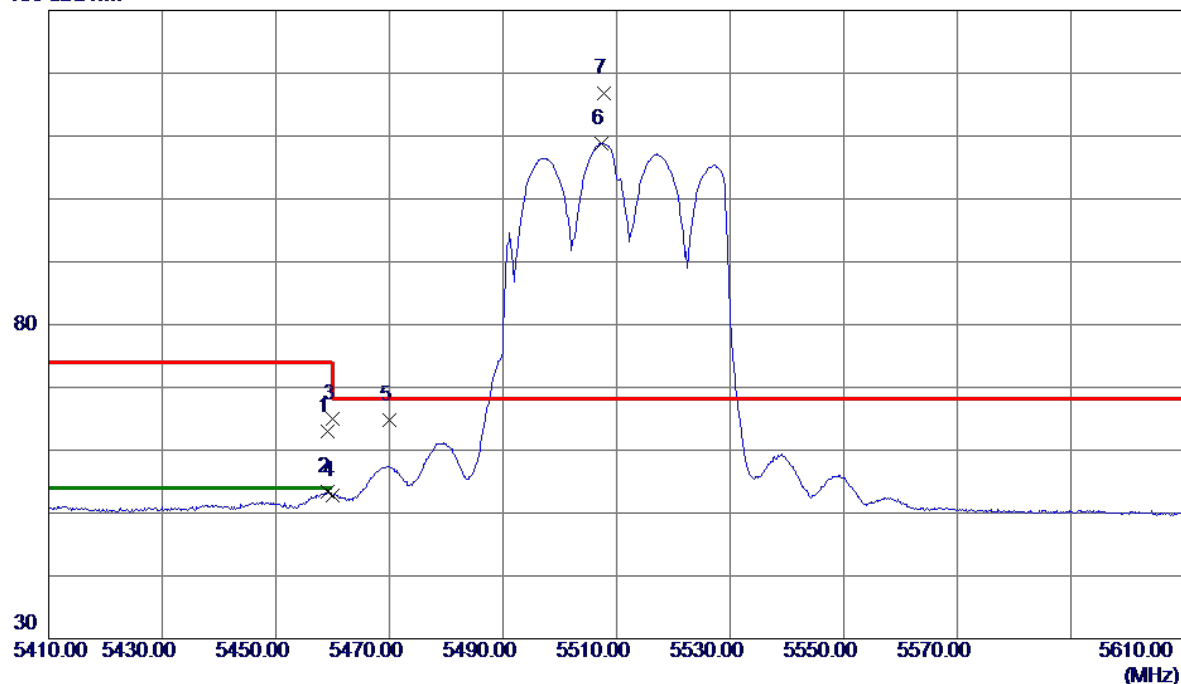


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5459.1000	48.88	14.20	63.08	74.00	-10.92	Peak	
2	5459.1000	39.14	14.20	53.34	54.00	-0.66	AVG	
3	5460.0000	50.74	14.20	64.94	74.00	-9.06	Peak	
4	5460.0000	38.63	14.20	52.83	54.00	-1.17	AVG	
5	5470.0000	50.57	14.22	64.79	68.20	-3.41	Peak	
6	5507.4000	94.52	14.31	108.83	999.00	-890.17	AVG	No Limit
7 *	5507.7000	102.51	14.31	116.82	68.20	48.62	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5510 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

100 dBuV/m

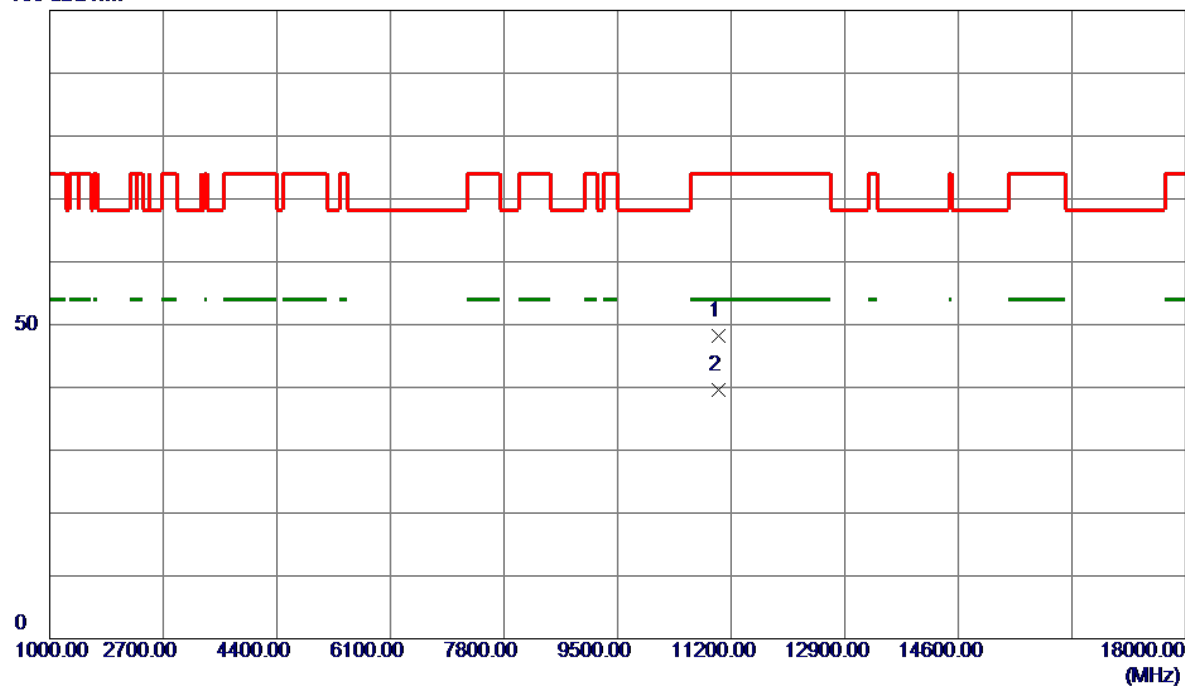


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11011.4250	38.90	9.27	48.17	74.00	-25.83	Peak	
2 *	11020.0000	30.33	9.28	39.61	54.00	-14.39	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5550 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

100 dBuV/m

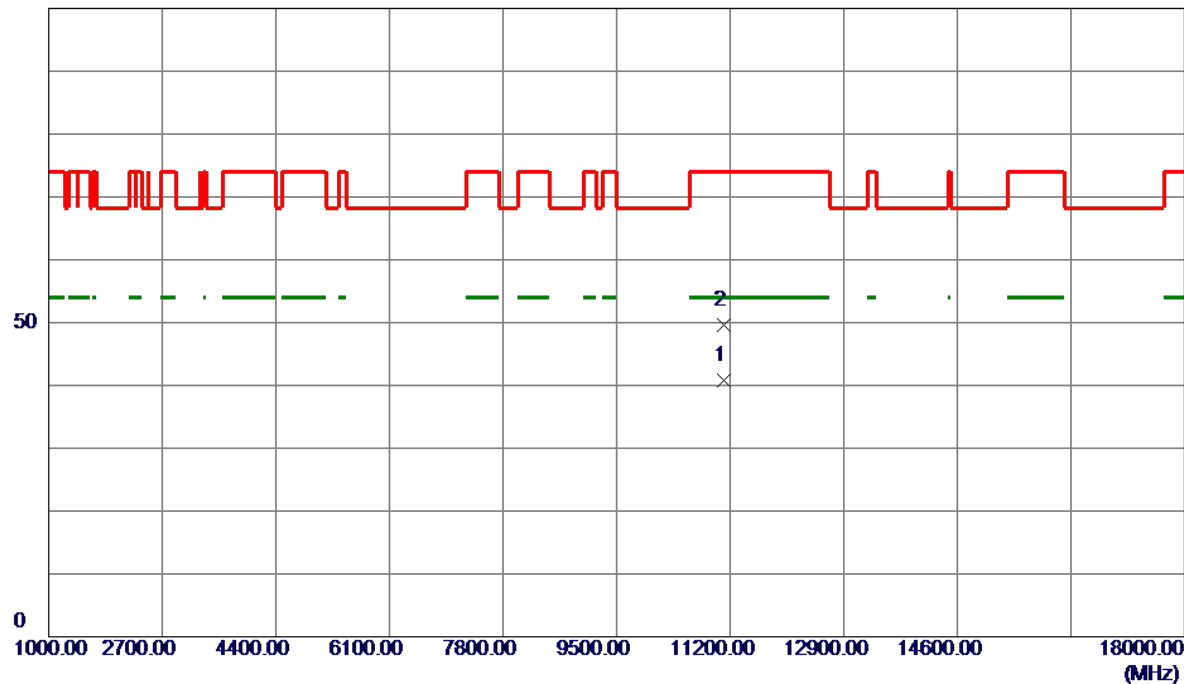


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11099.9250	31.53	9.34	40.87	54.00	-13.13	AVG	
2	11100.1750	40.20	9.34	49.54	74.00	-24.46	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5670 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

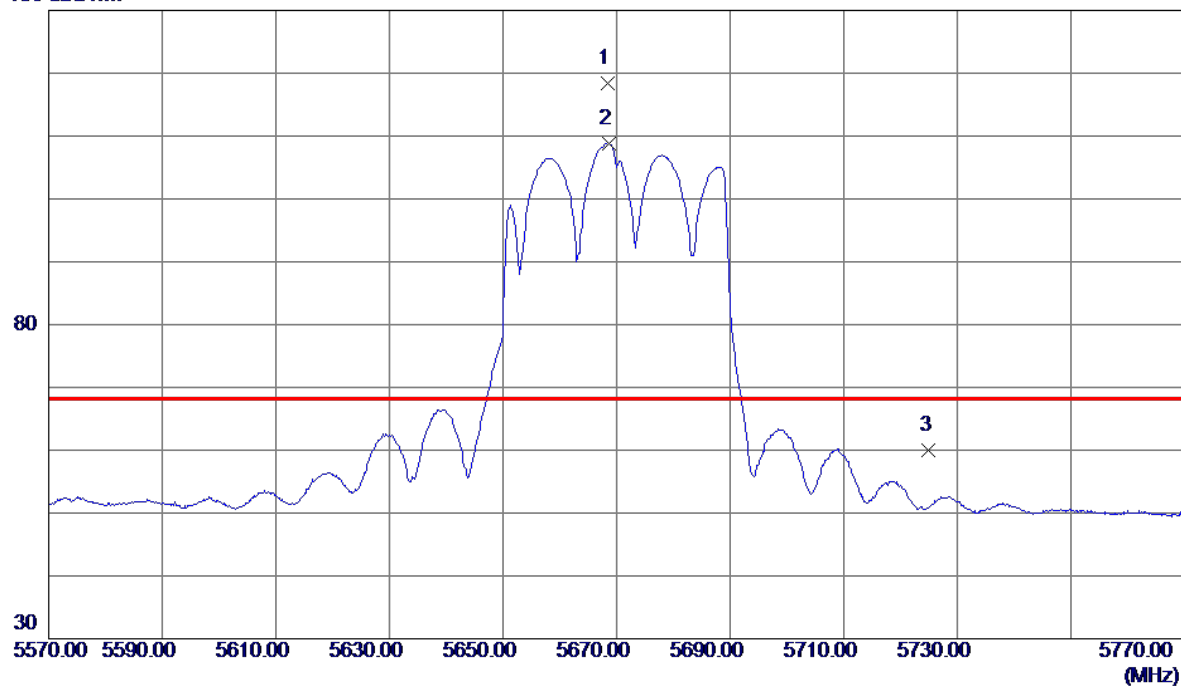


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5668.5000	103.58	14.82	118.40	68.20	50.20	Peak	No Limit
2	5668.7000	93.98	14.82	108.80	999.00	-890.20	AVG	No Limit
3	5725.0000	45.05	15.00	60.05	68.20	-8.15	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5670 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

100 dBuV/m

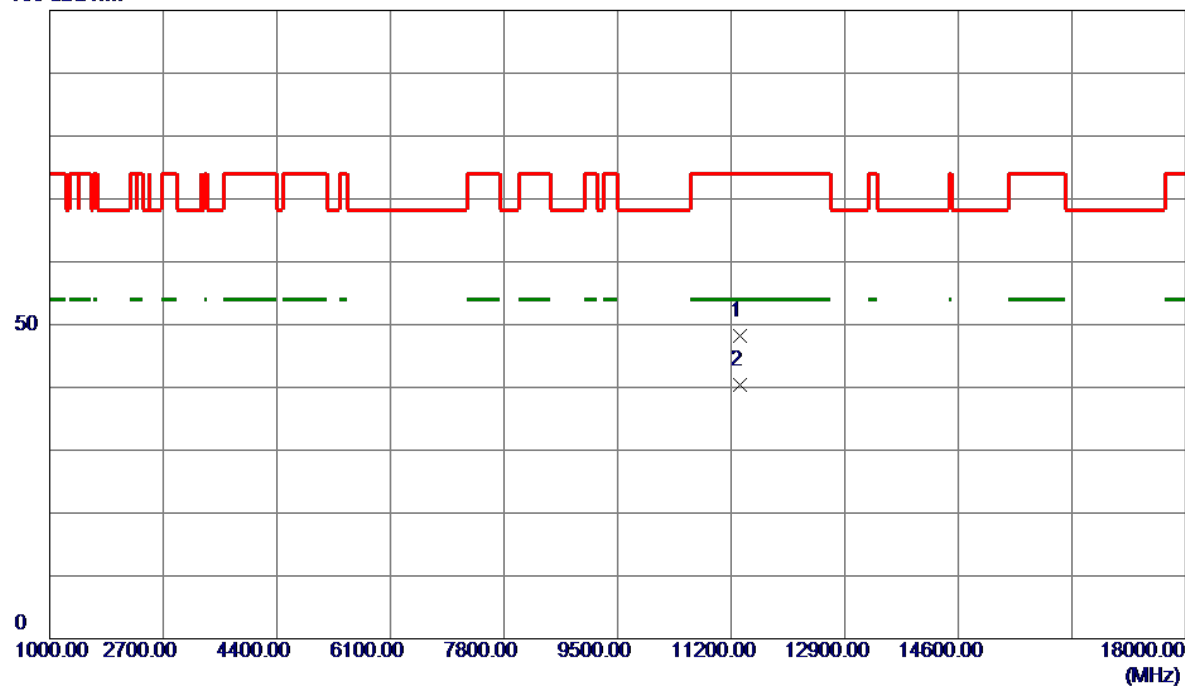


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11339.8500	38.74	9.54	48.28	74.00	-25.72	Peak	
2 *	11340.0450	30.82	9.54	40.36	54.00	-13.64	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5530 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

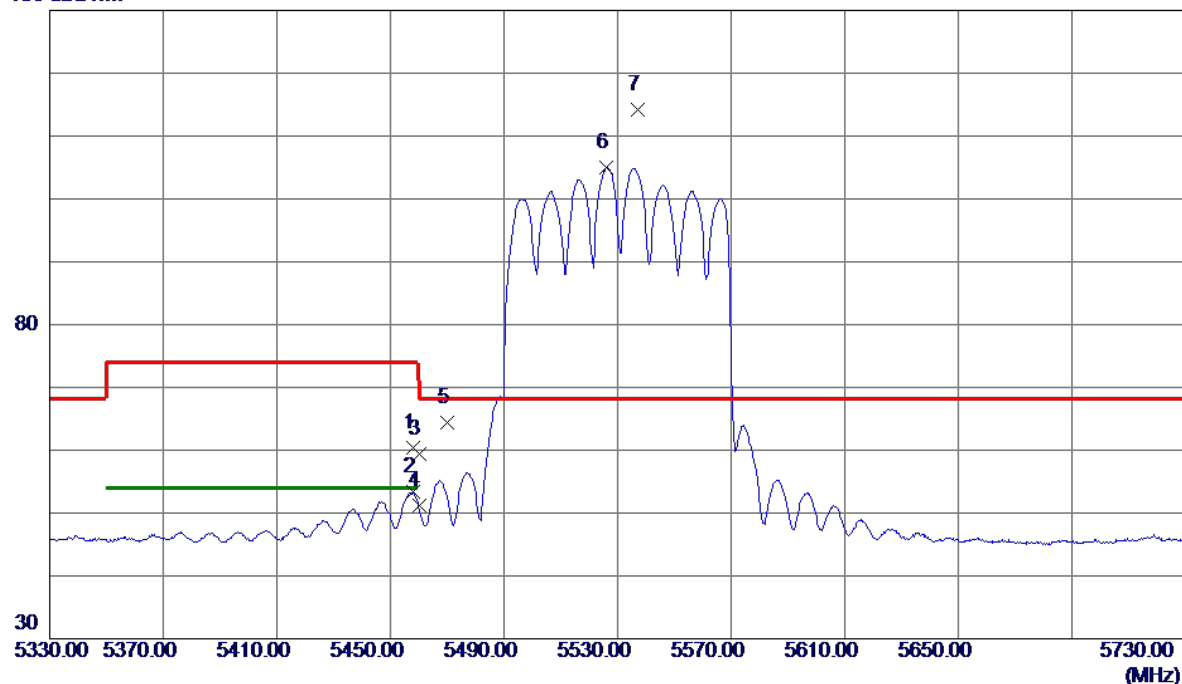


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5458.2000	46.15	14.20	60.35	74.00	-13.65	Peak	
2	5458.2000	39.16	14.20	53.36	54.00	-0.64	AVG	
3	5460.0000	45.18	14.20	59.38	74.00	-14.62	Peak	
4	5460.0000	36.96	14.20	51.16	54.00	-2.84	AVG	
5	5470.0000	50.10	14.22	64.32	68.20	-3.88	Peak	
6	5526.0000	90.58	14.37	104.95	999.00	-894.05	AVG	No Limit
7 *	5537.0000	99.79	14.40	114.19	68.20	45.99	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5530 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

100 dBuV/m

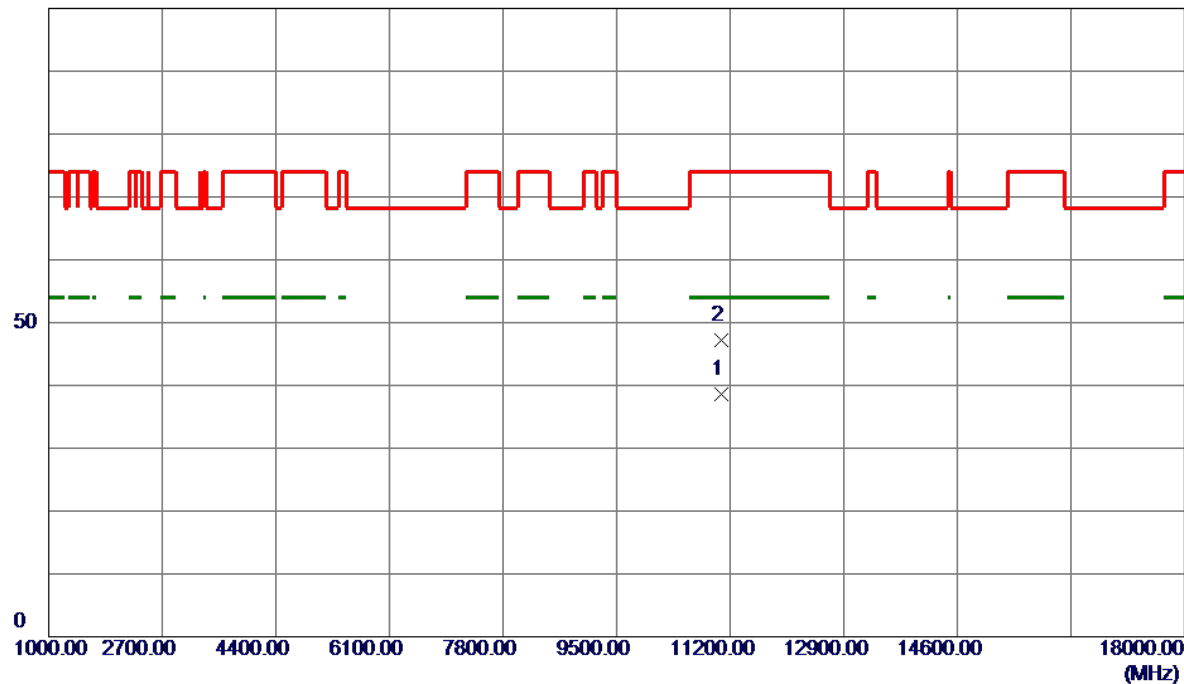


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11059.8900	29.37	9.31	38.68	54.00	-15.32	AVG	
2	11060.9000	37.83	9.31	47.14	74.00	-26.86	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5610 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

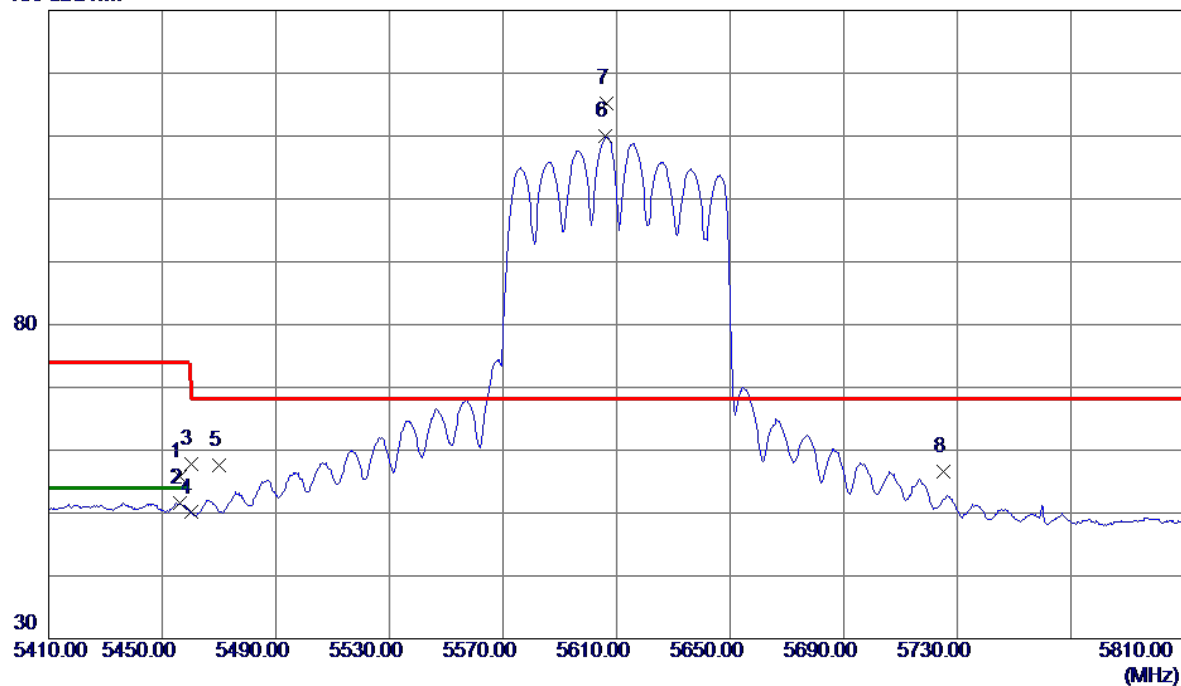


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5456.4000	41.60	14.19	55.79	74.00	-18.21	Peak	
2	5456.4000	37.38	14.19	51.57	54.00	-2.43	AVG	
3	5460.0000	43.51	14.20	57.71	74.00	-16.29	Peak	
4	5460.0000	35.90	14.20	50.10	54.00	-3.90	AVG	
5	5470.0000	43.34	14.22	57.56	68.20	-10.64	Peak	
6	5606.2000	95.35	14.62	109.97	999.00	-889.03	AVG	No Limit
7 *	5606.6000	100.66	14.62	115.28	68.20	47.08	Peak	No Limit
8	5725.0000	41.59	15.00	56.59	68.20	-11.61	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5610 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

100 dBuV/m

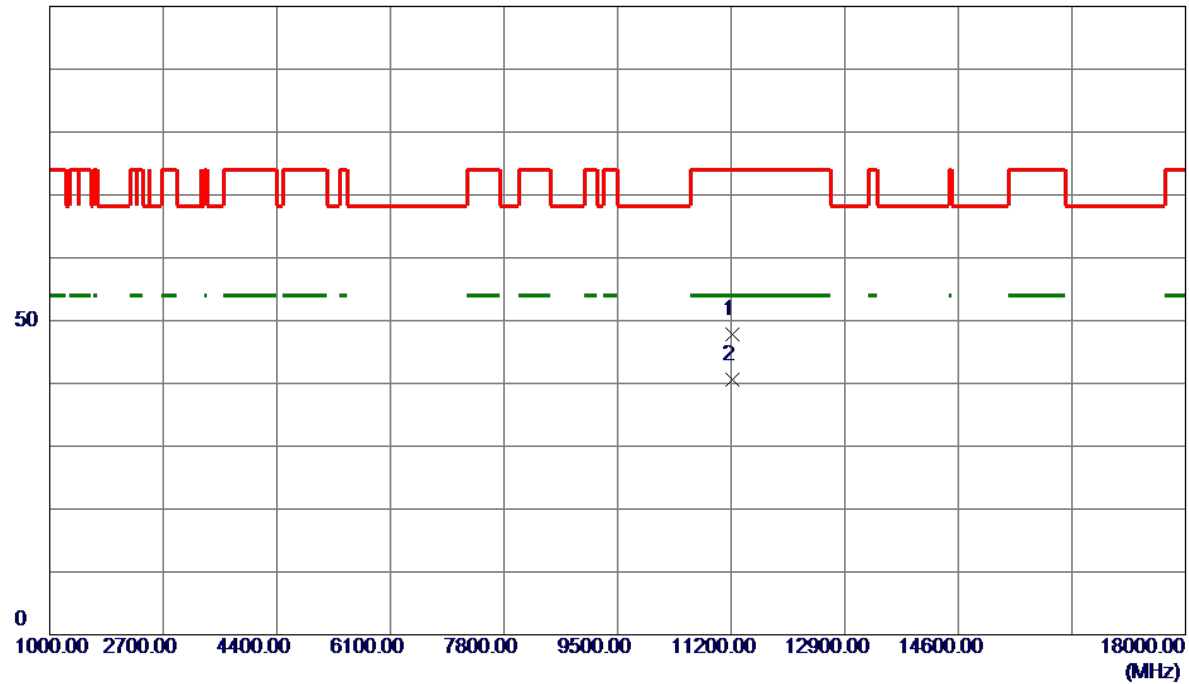


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11219.7500	38.45	9.44	47.89	74.00	-26.11	Peak	
2 *	11220.0000	31.21	9.44	40.65	54.00	-13.35	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE160) Mode 5570 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

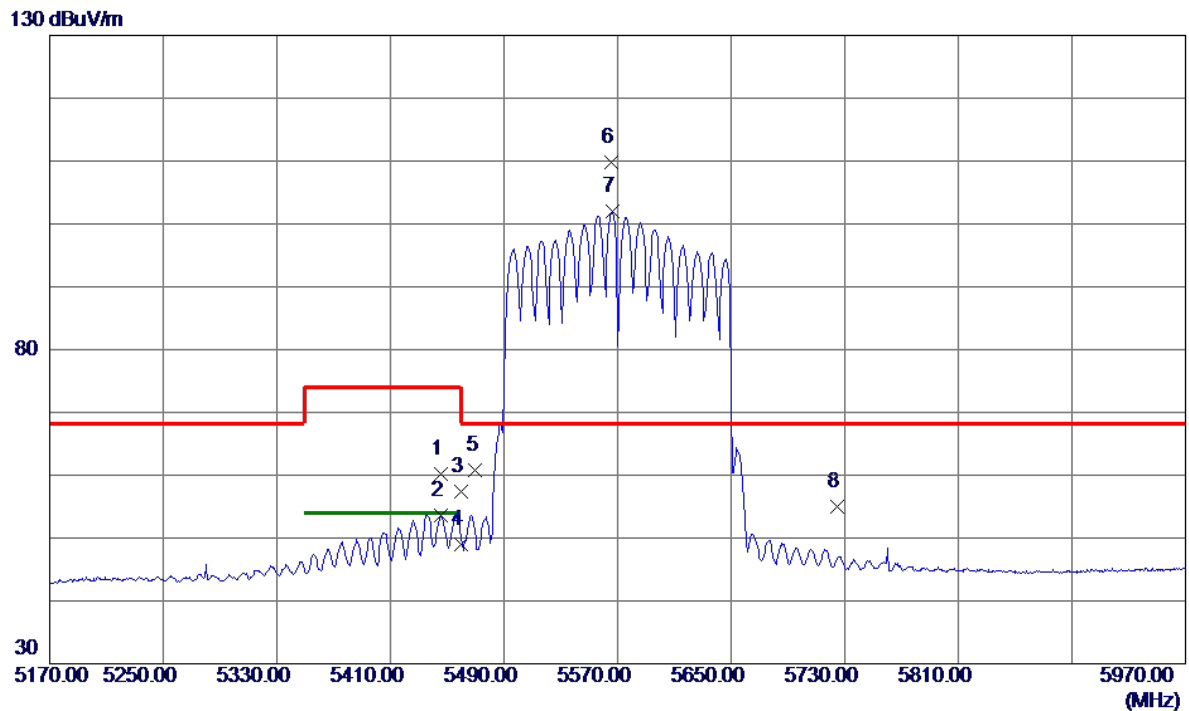


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5445.6000	46.02	14.17	60.19	74.00	-13.81	Peak	
2	5445.6000	39.44	14.17	53.61	54.00	-0.39	AVG	
3	5460.0000	43.22	14.20	57.42	74.00	-16.58	Peak	
4	5460.0000	34.74	14.20	48.94	54.00	-5.06	AVG	
5	5470.0000	46.53	14.22	60.75	68.20	-7.45	Peak	
6 *	5565.6000	95.25	14.49	109.74	68.20	41.54	Peak	No Limit
7	5566.4000	87.47	14.50	101.97	999.00	-897.03	AVG	No Limit
8	5725.0000	40.02	15.00	55.02	68.20	-13.18	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE160) Mode 5570 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

100 dBuV/m

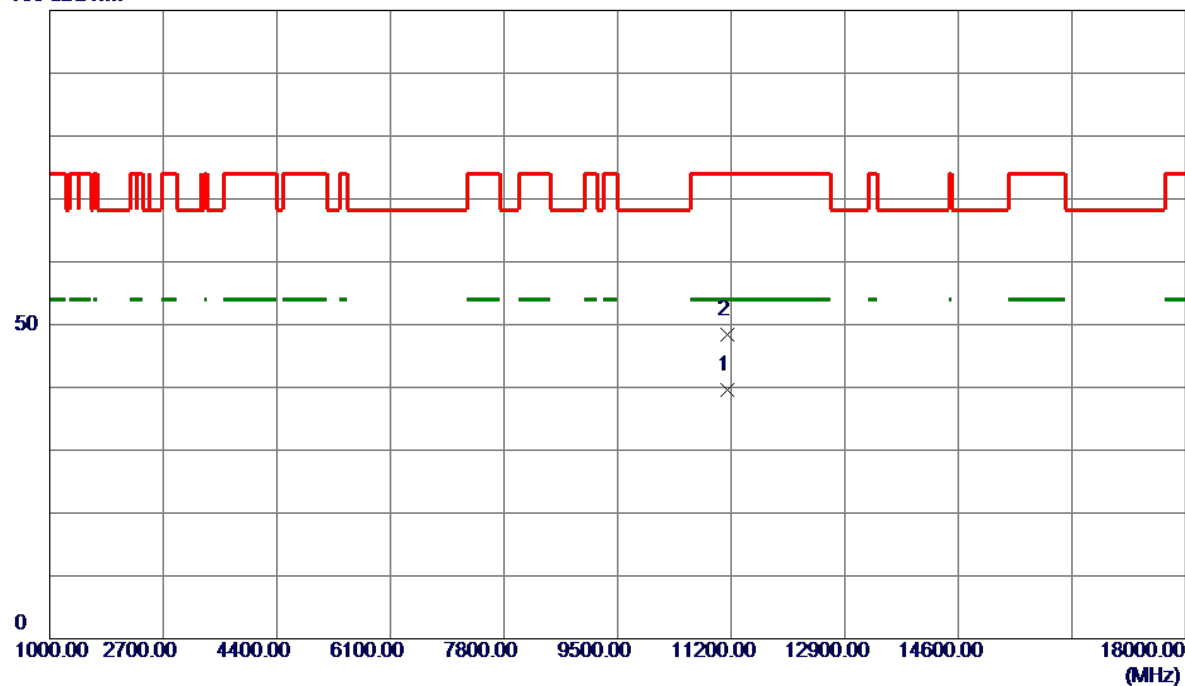


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11140.0050	30.18	9.38	39.56	54.00	-14.44	AVG	
2	11140.3300	39.00	9.38	48.38	74.00	-25.62	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

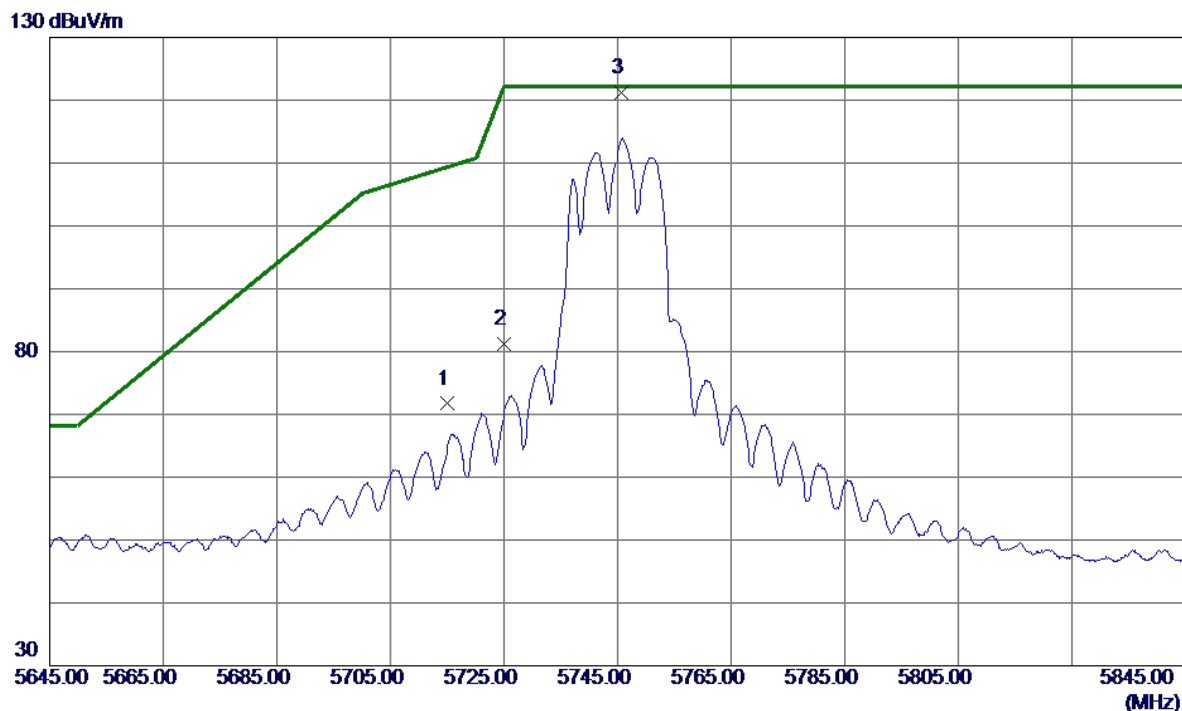


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	56.73	14.97	71.70	109.40	-37.70	Peak	
2	5725.0000	66.17	15.00	81.17	122.20	-41.03	Peak	
3 *	5745.7000	106.12	15.06	121.18	122.20	-1.02	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

100 dBuV/m

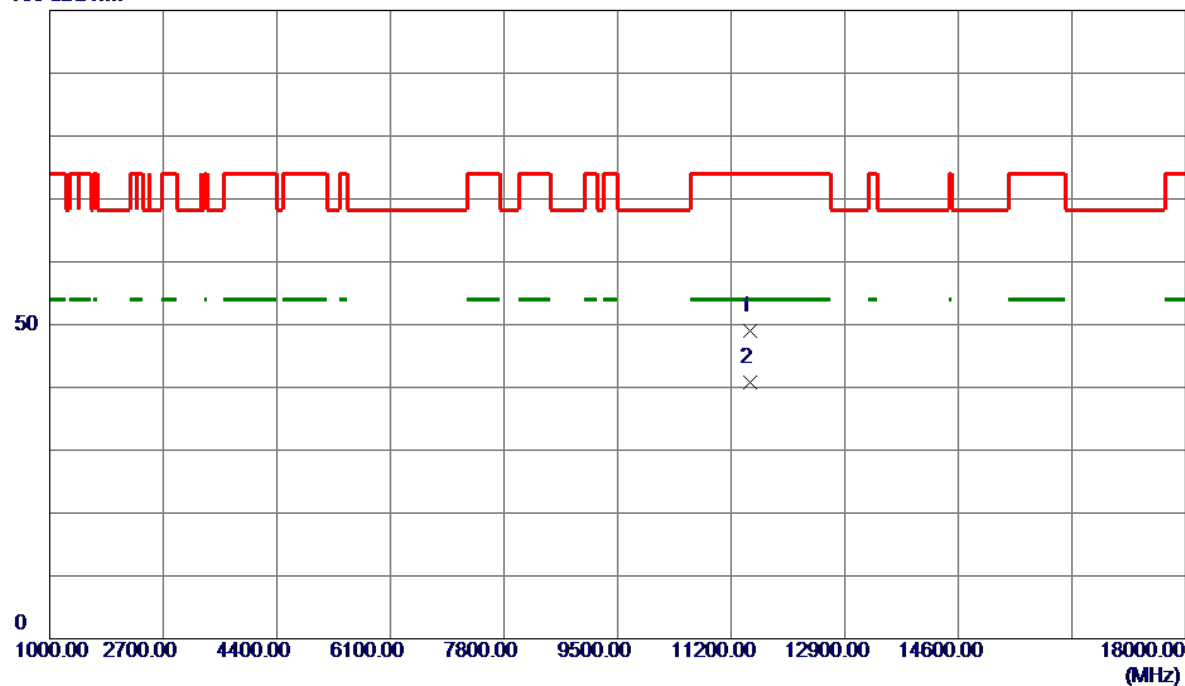


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11486.2000	39.33	9.66	48.99	74.00	-25.01	Peak	
2 *	11491.7500	31.10	9.67	40.77	54.00	-13.23	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

100 dBuV/m

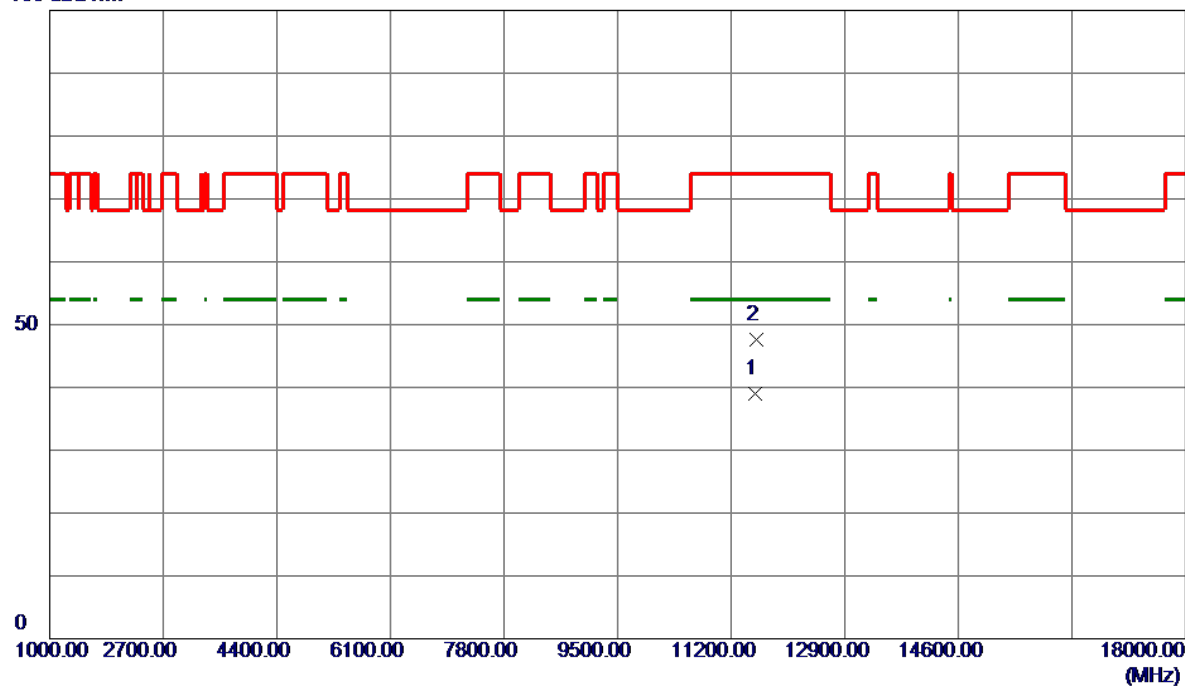


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11567.0000	29.30	9.66	38.96	54.00	-15.04	AVG	
2	11571.6000	37.90	9.66	47.56	74.00	-26.44	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

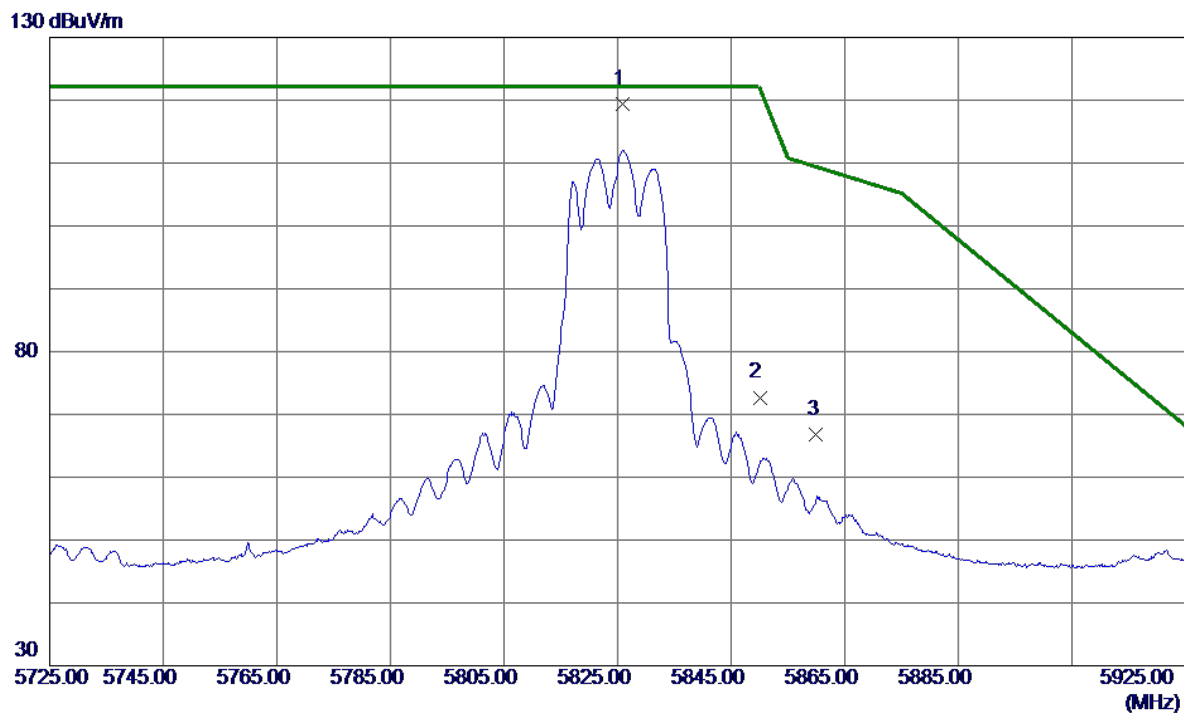


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5825.8000	104.08	15.32	119.40	122.20	-2.80	Peak	No Limit
2	5850.0000	57.31	15.39	72.70	122.20	-49.50	Peak	
3	5860.0000	51.28	15.43	66.71	109.40	-42.69	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

100 dBuV/m

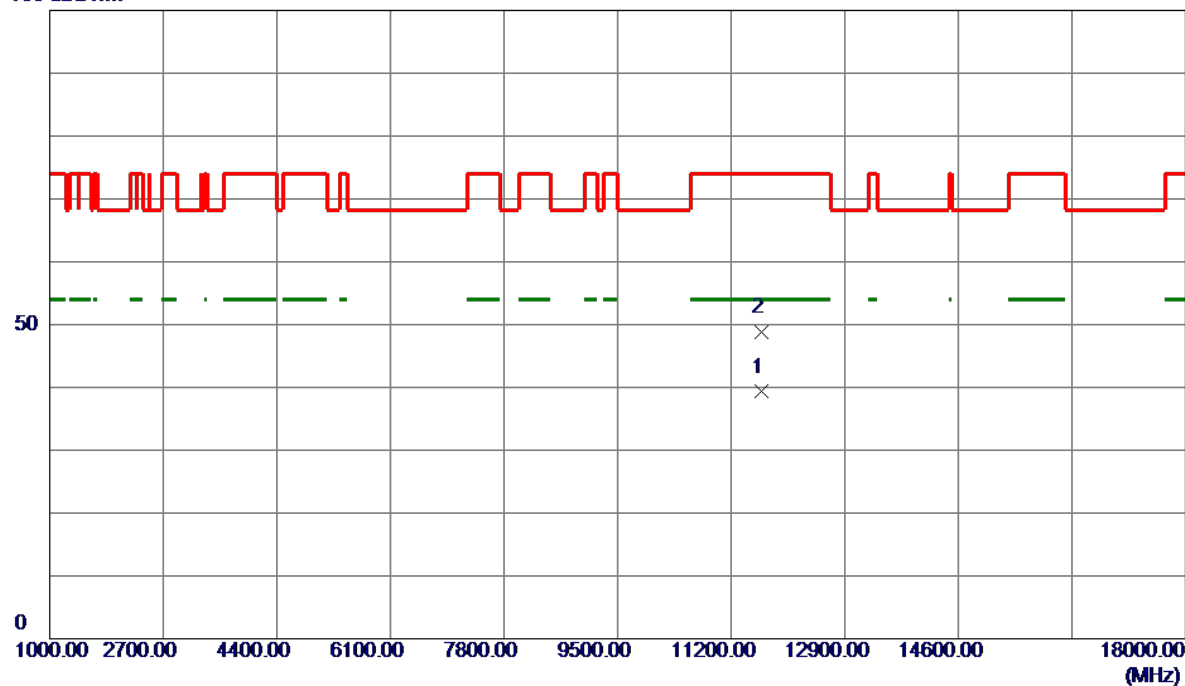


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11650.2000	29.65	9.65	39.30	54.00	-14.70	AVG	
2	11650.8000	39.20	9.65	48.85	74.00	-25.15	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

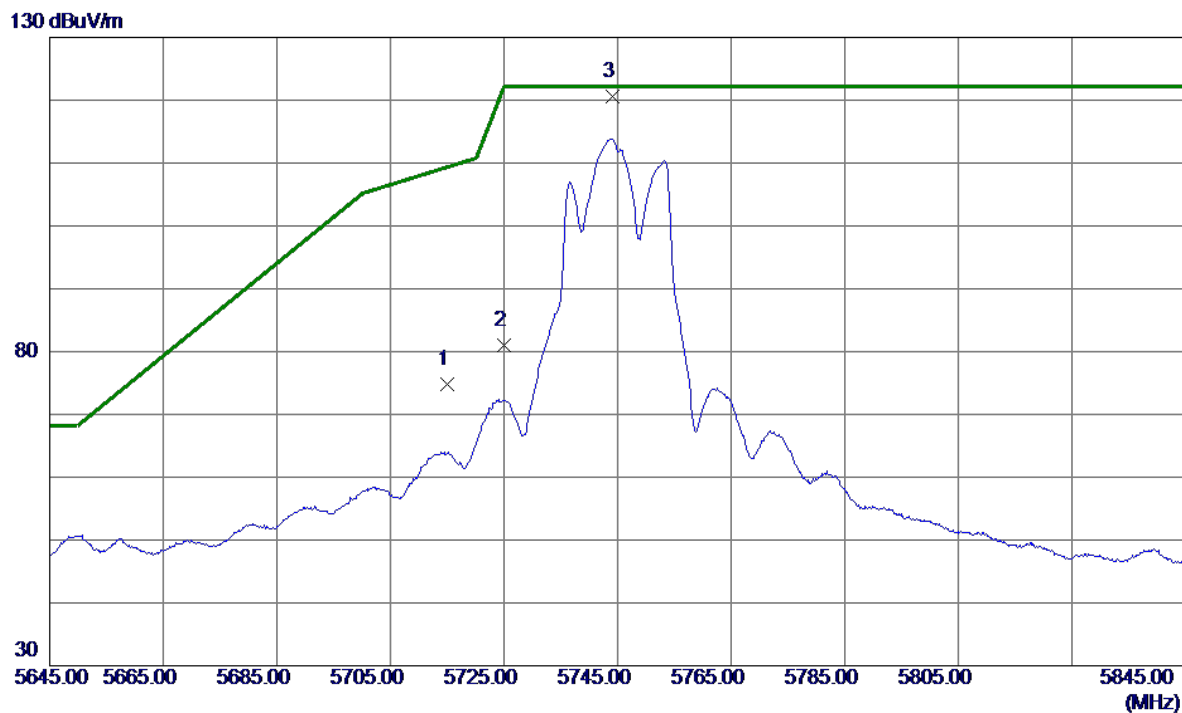


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	59.86	14.97	74.83	109.40	-34.57	Peak	
2	5725.0000	66.06	15.00	81.06	122.20	-41.14	Peak	
3 *	5744.2000	105.58	15.06	120.64	122.20	-1.56	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

100 dBuV/m

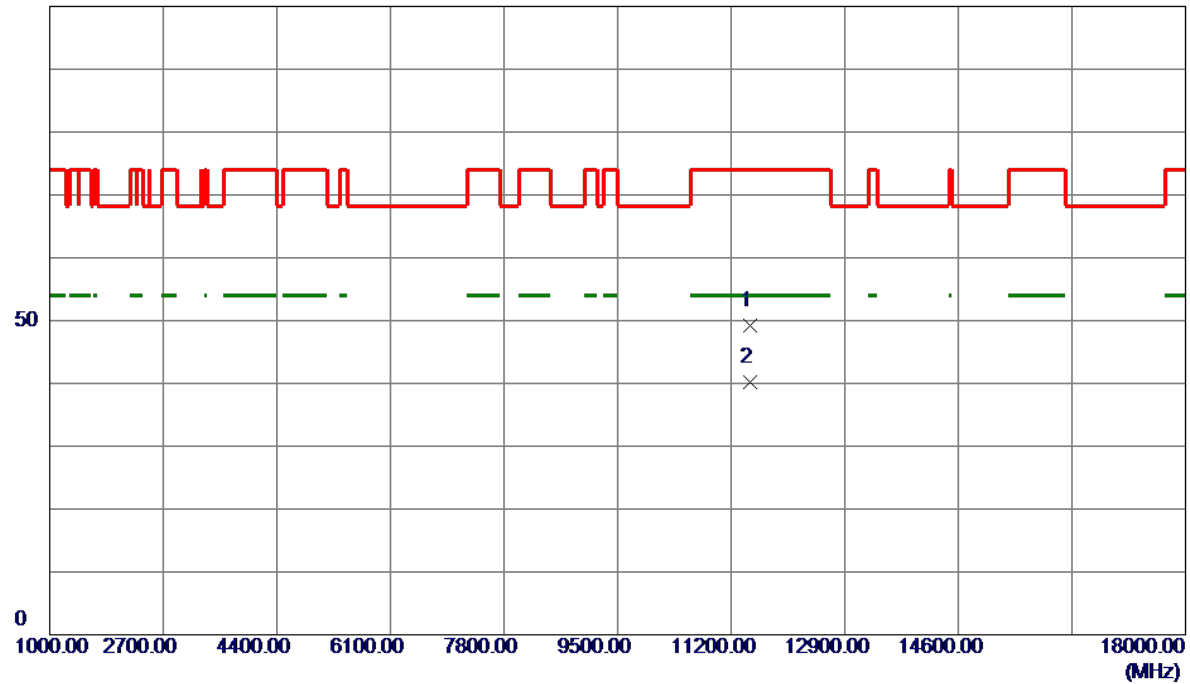


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11489.8500	39.55	9.67	49.22	74.00	-24.78	Peak	
2 *	11489.8500	30.62	9.67	40.29	54.00	-13.71	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

100 dBuV/m

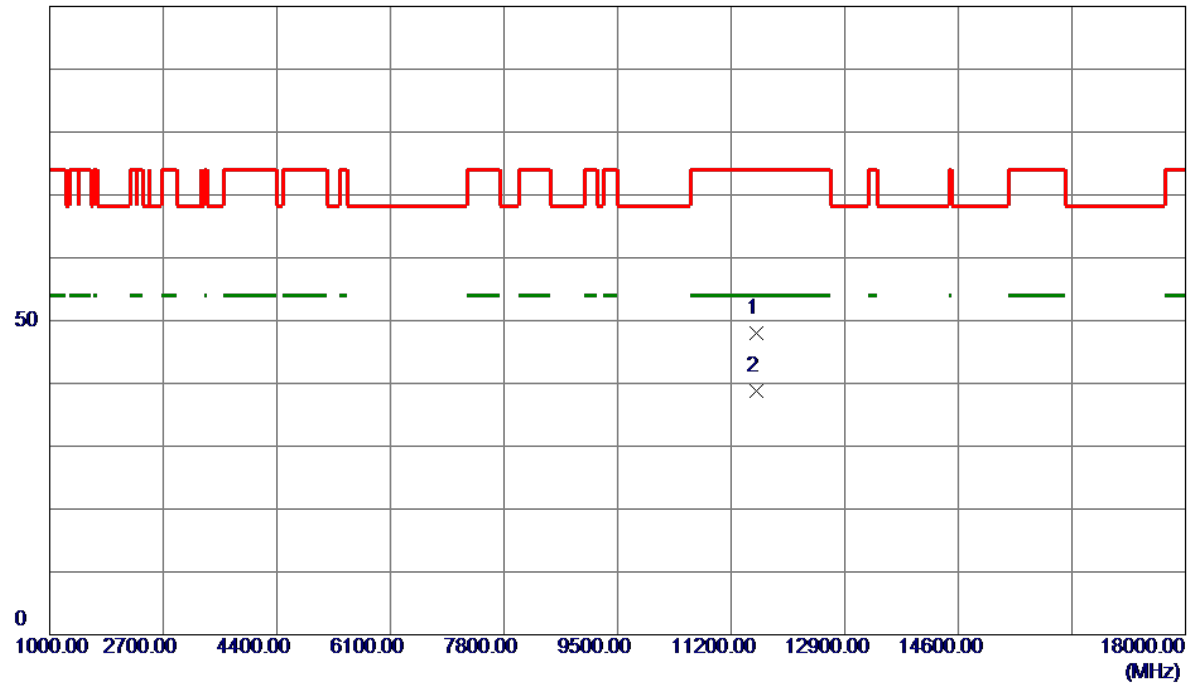


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11571.2500	38.32	9.66	47.98	74.00	-26.02	Peak	
2 *	11571.7500	29.20	9.66	38.86	54.00	-15.14	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

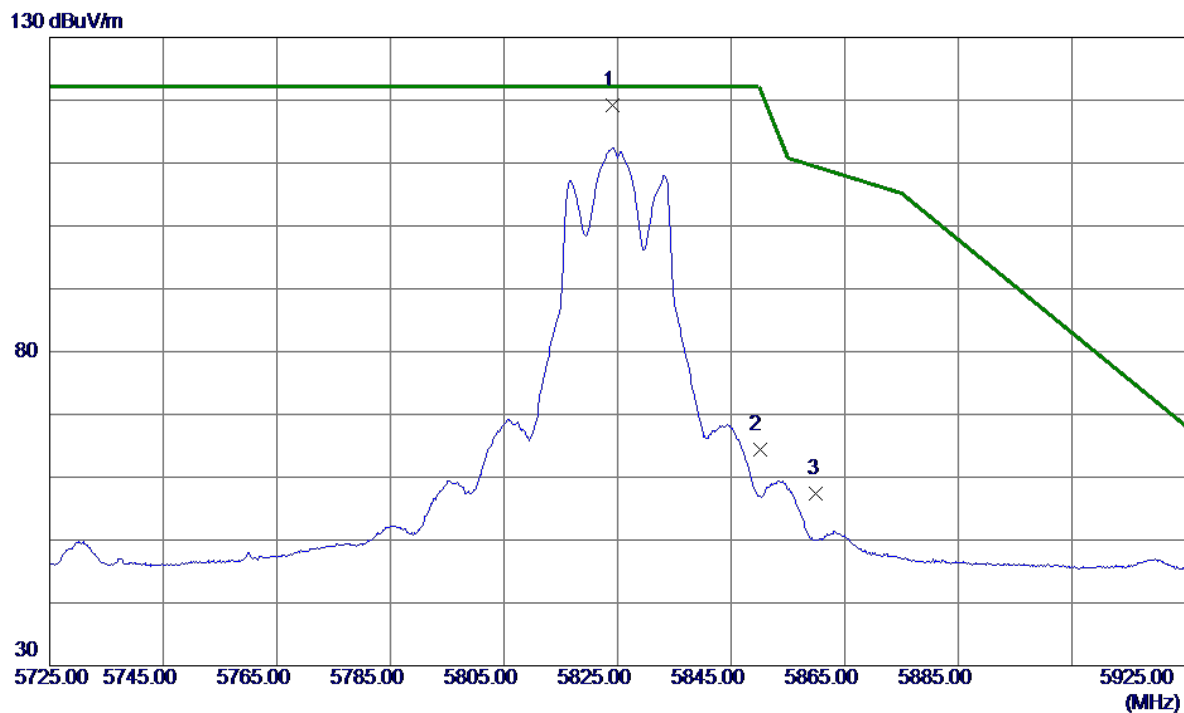


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5824.1000	103.91	15.31	119.22	122.20	-2.98	Peak	No Limit
2	5850.0000	49.09	15.39	64.48	122.20	-57.72	Peak	
3	5860.0000	41.92	15.43	57.35	109.40	-52.05	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

100 dBuV/m

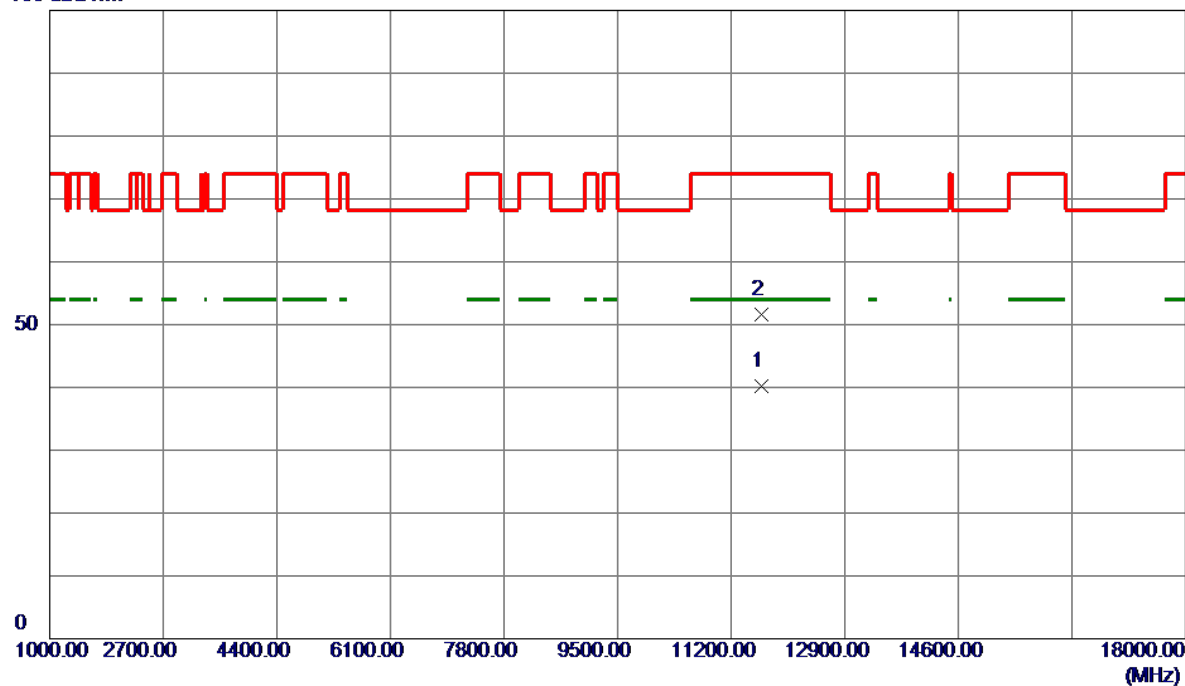


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11647.5000	30.64	9.65	40.29	54.00	-13.71	AVG	
2	11651.3000	41.88	9.65	51.53	74.00	-22.47	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

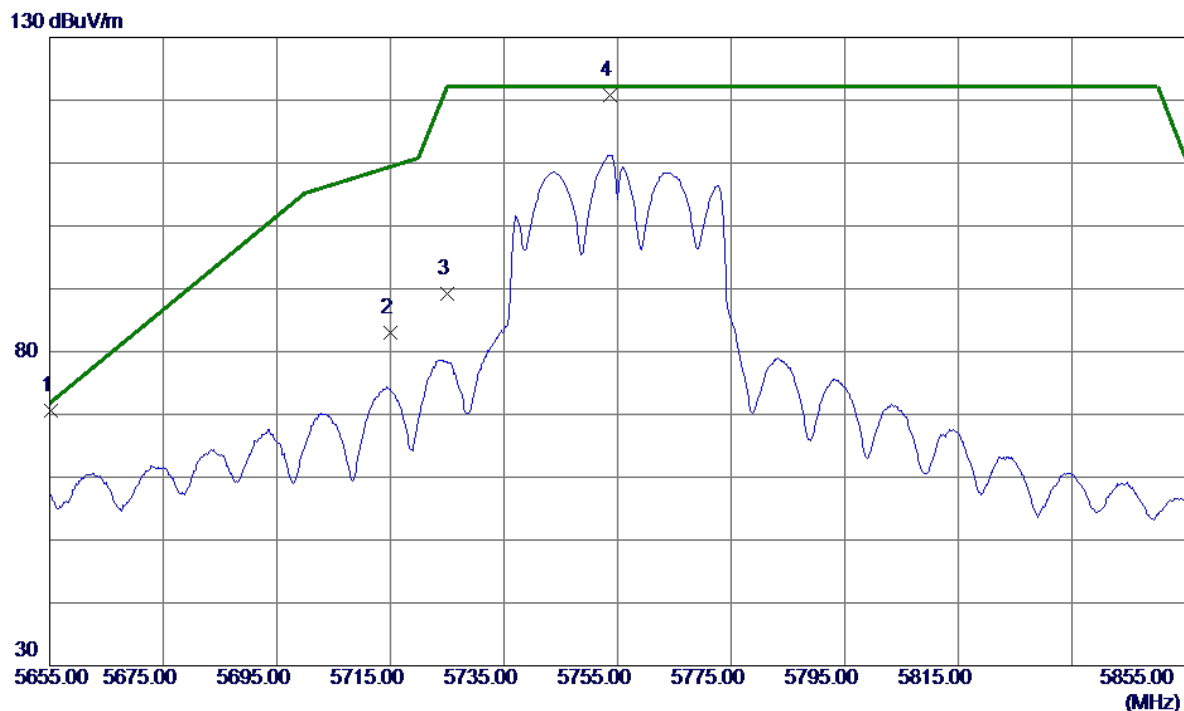


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5655.3000	55.75	14.78	70.53	72.12	-1.59	Peak	
2	5715.0000	67.99	14.97	82.96	109.40	-26.44	Peak	
3	5725.0000	74.23	15.00	89.23	122.20	-32.97	Peak	
4 *	5753.6000	105.73	15.09	120.82	122.20	-1.38	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

100 dBuV/m

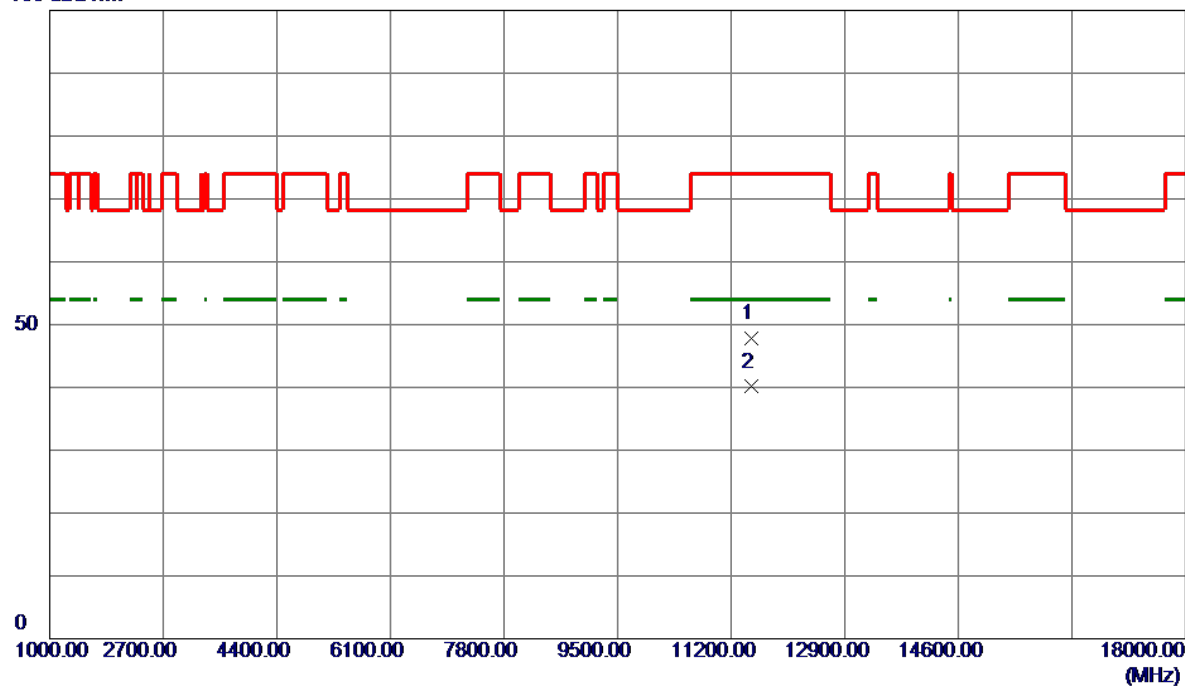


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11509.6000	38.19	9.67	47.86	74.00	-26.14	Peak	
2 *	11509.8500	30.43	9.67	40.10	54.00	-13.90	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

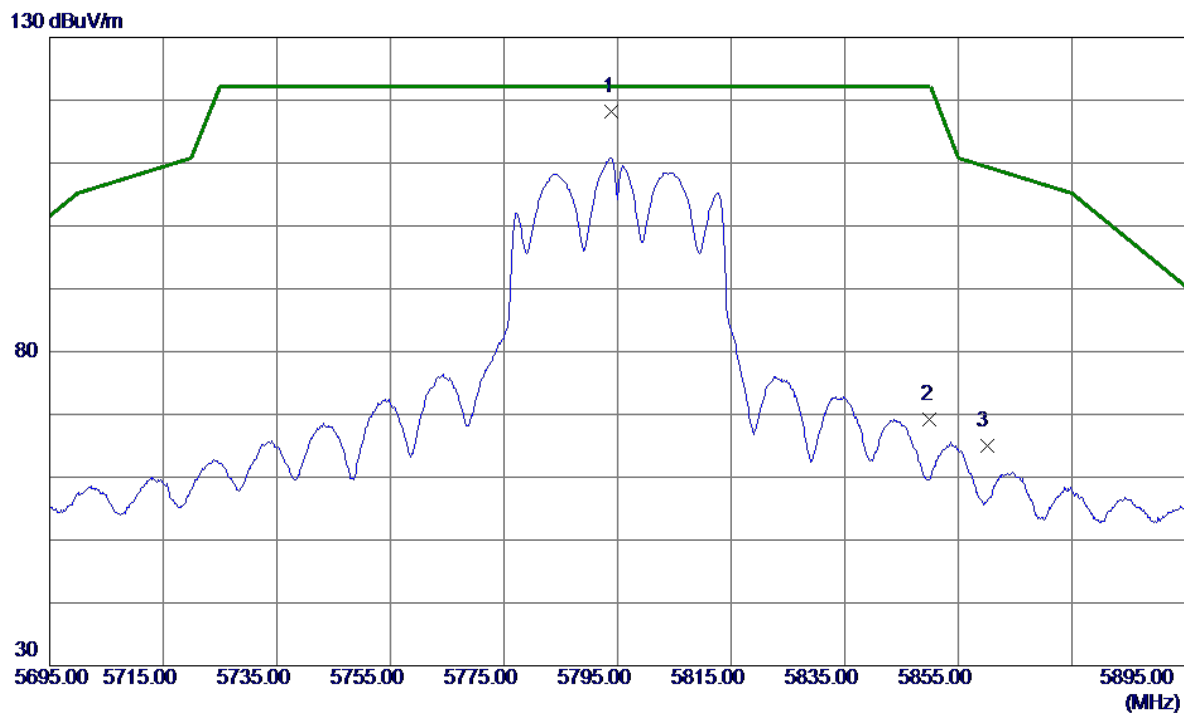


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5794.0000	103.03	15.22	118.25	122.20	-3.95	Peak	No Limit
2	5850.0000	53.88	15.39	69.27	122.20	-52.93	Peak	
3	5860.0000	49.56	15.43	64.99	109.40	-44.41	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

100 dBuV/m

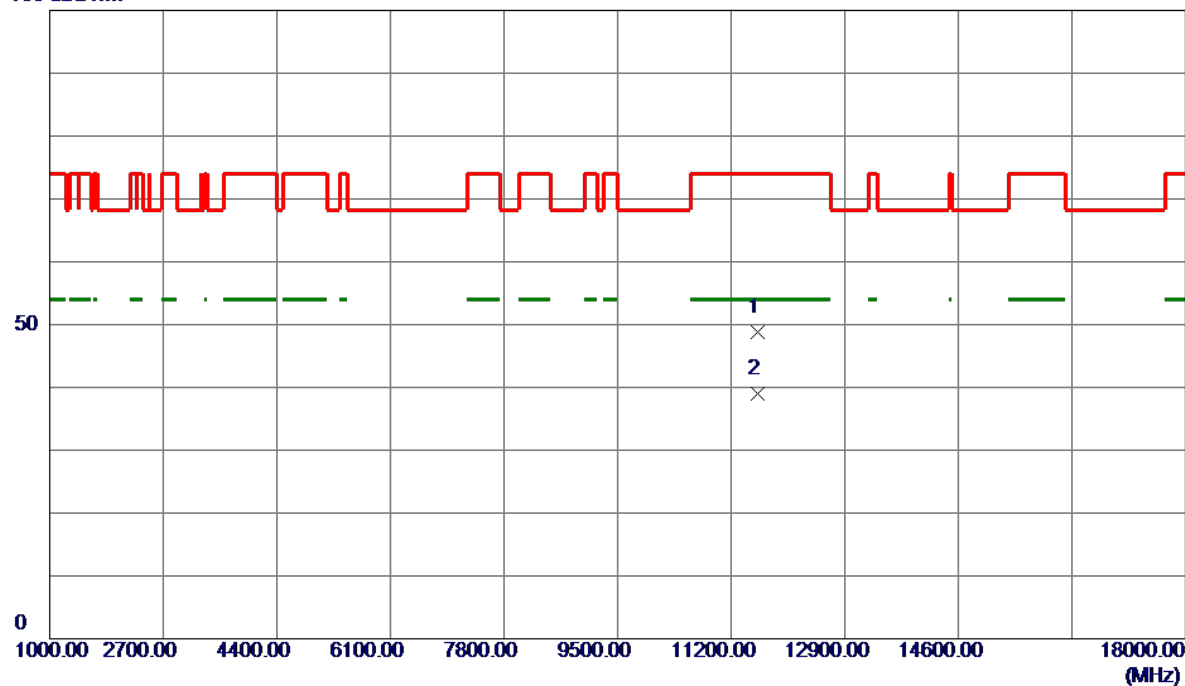


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11589.3500	39.17	9.66	48.83	74.00	-25.17	Peak	
2 *	11589.8000	29.42	9.66	39.08	54.00	-14.92	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

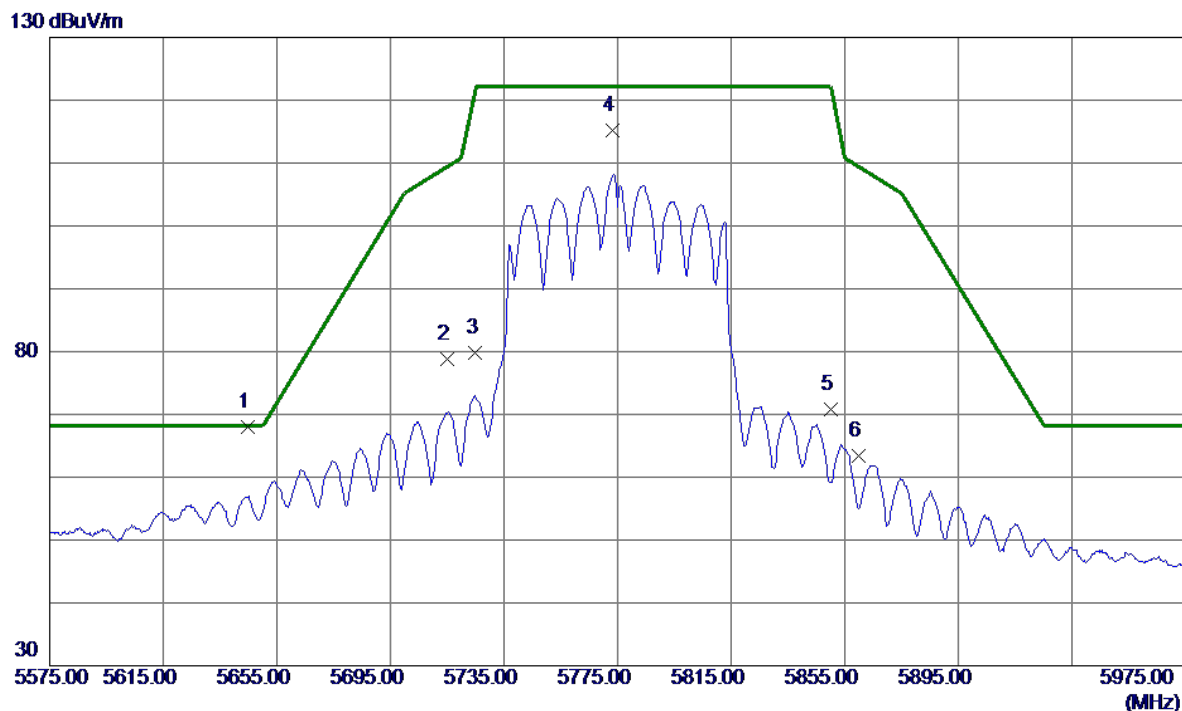


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5644.8000	53.27	14.74	68.01	68.20	-0.19	Peak	
2	5715.0000	63.84	14.97	78.81	109.40	-30.59	Peak	
3	5725.0000	64.74	15.00	79.74	122.20	-42.46	Peak	
4	5773.4000	100.10	15.15	115.25	122.20	-6.95	Peak	No Limit
5	5850.0000	55.48	15.39	70.87	122.20	-51.33	Peak	
6	5860.0000	47.94	15.43	63.37	109.40	-46.03	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

100 dBuV/m

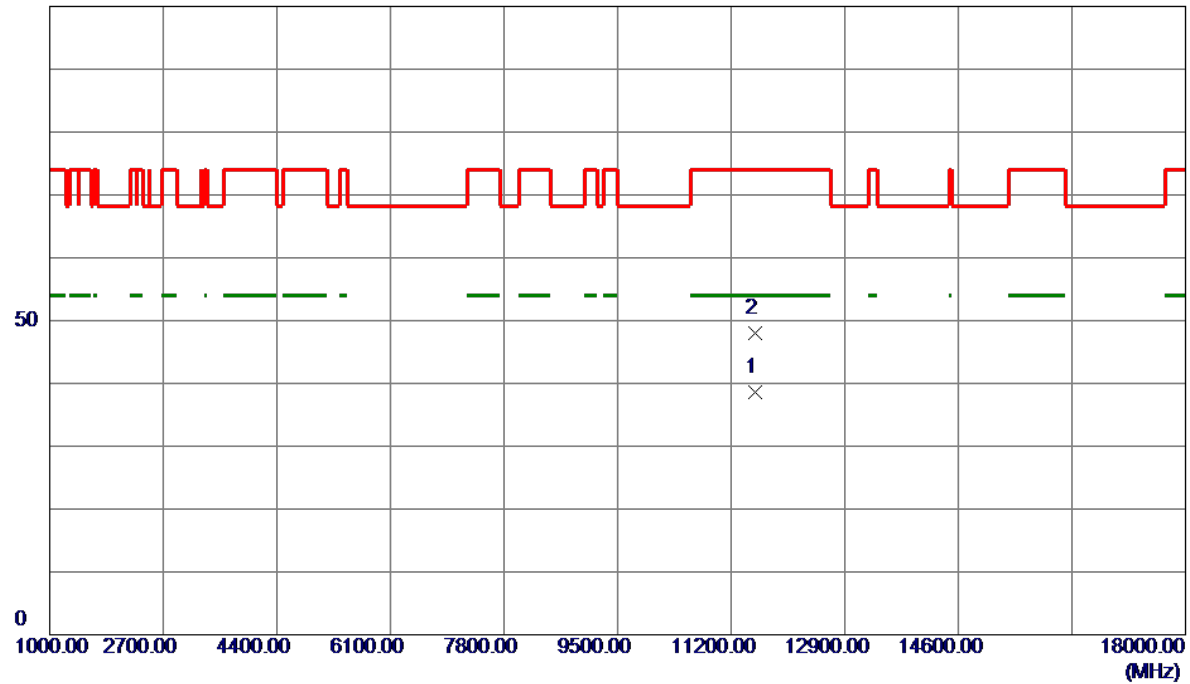


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11549.9000	28.86	9.67	38.53	54.00	-15.47	AVG	
2	11560.8000	38.34	9.67	48.01	74.00	-25.99	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5745 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

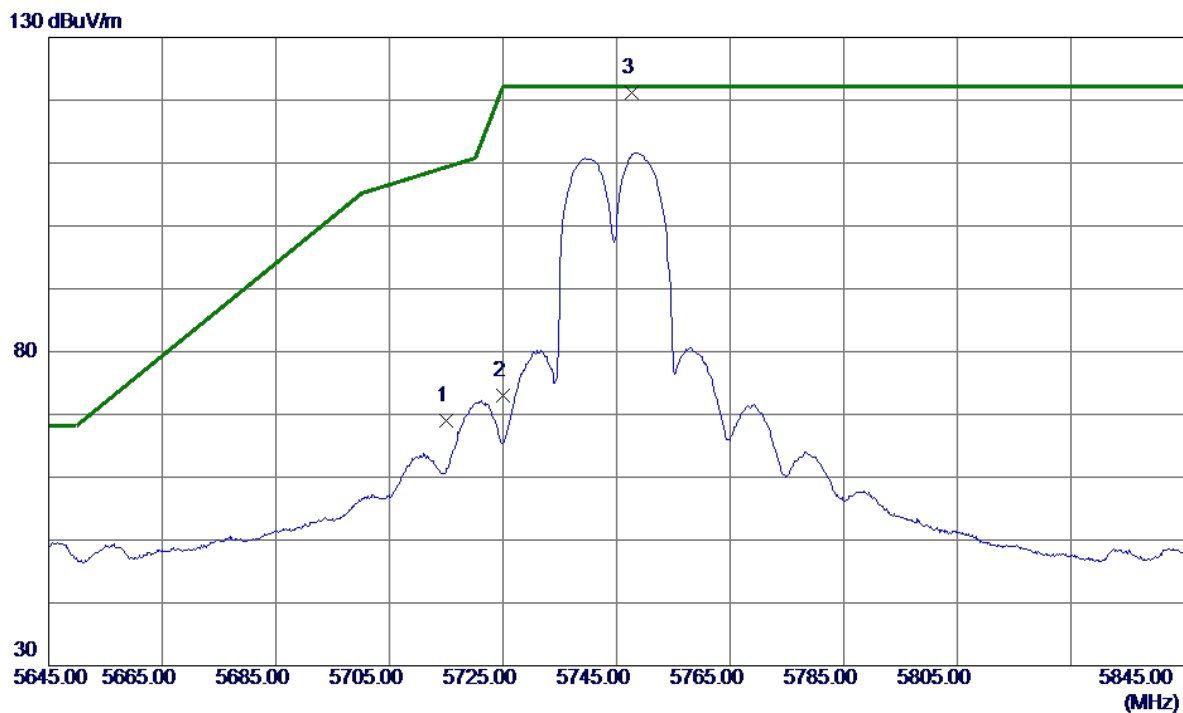


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	53.95	14.97	68.92	109.40	-40.48	Peak	
2	5725.0000	58.05	15.00	73.05	122.20	-49.15	Peak	
3 *	5747.6000	106.21	15.07	121.28	122.20	-0.92	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5745 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

100 dBuV/m

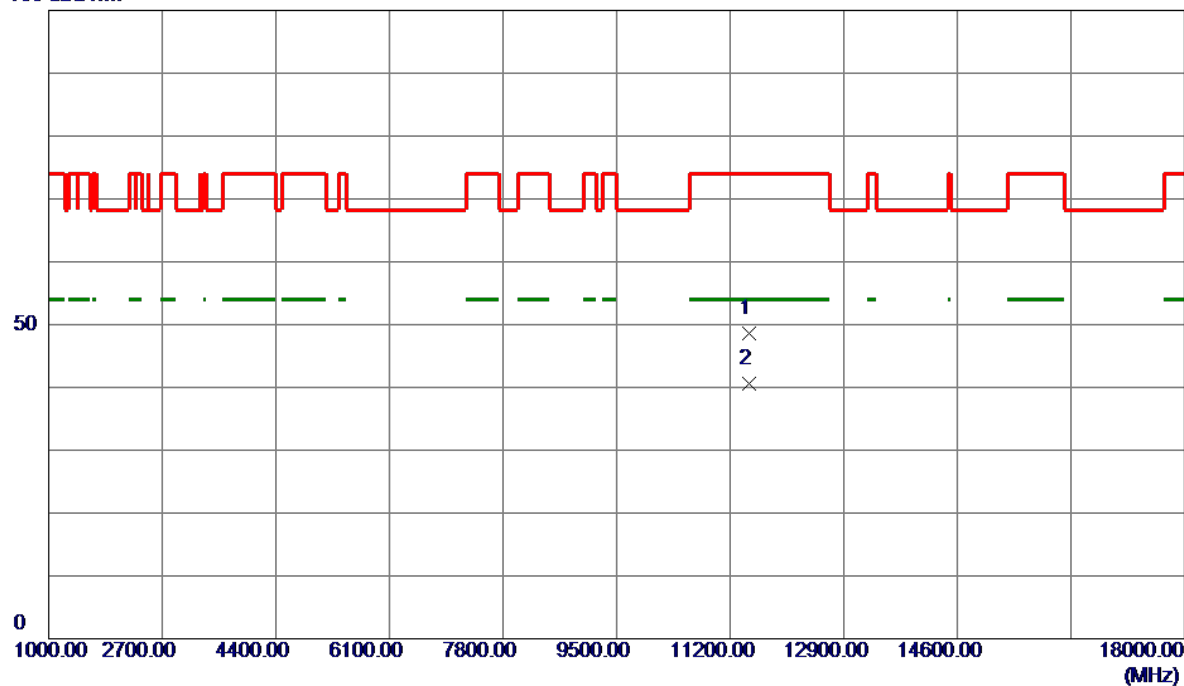


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11489.7699	38.91	9.67	48.58	74.00	-25.42	Peak	
2 *	11490.0199	30.90	9.67	40.57	54.00	-13.43	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5785 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

100 dBuV/m

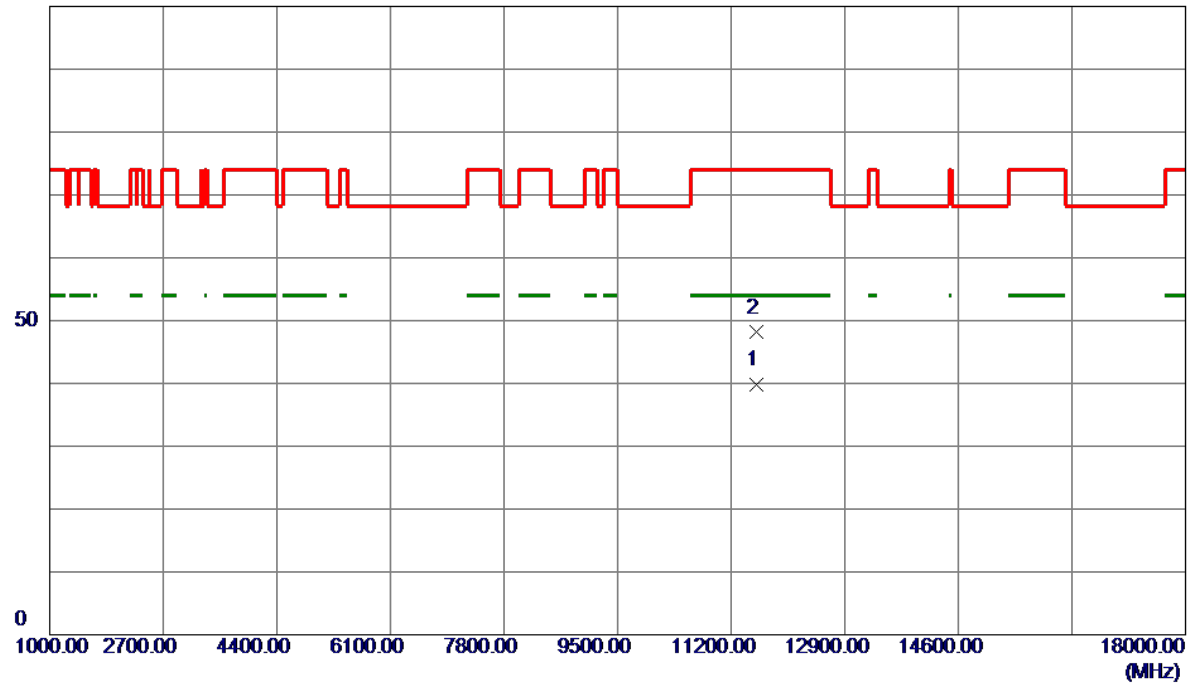


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11569.8800	30.23	9.66	39.89	54.00	-14.11	AVG	
2	11570.0100	38.44	9.66	48.10	74.00	-25.90	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

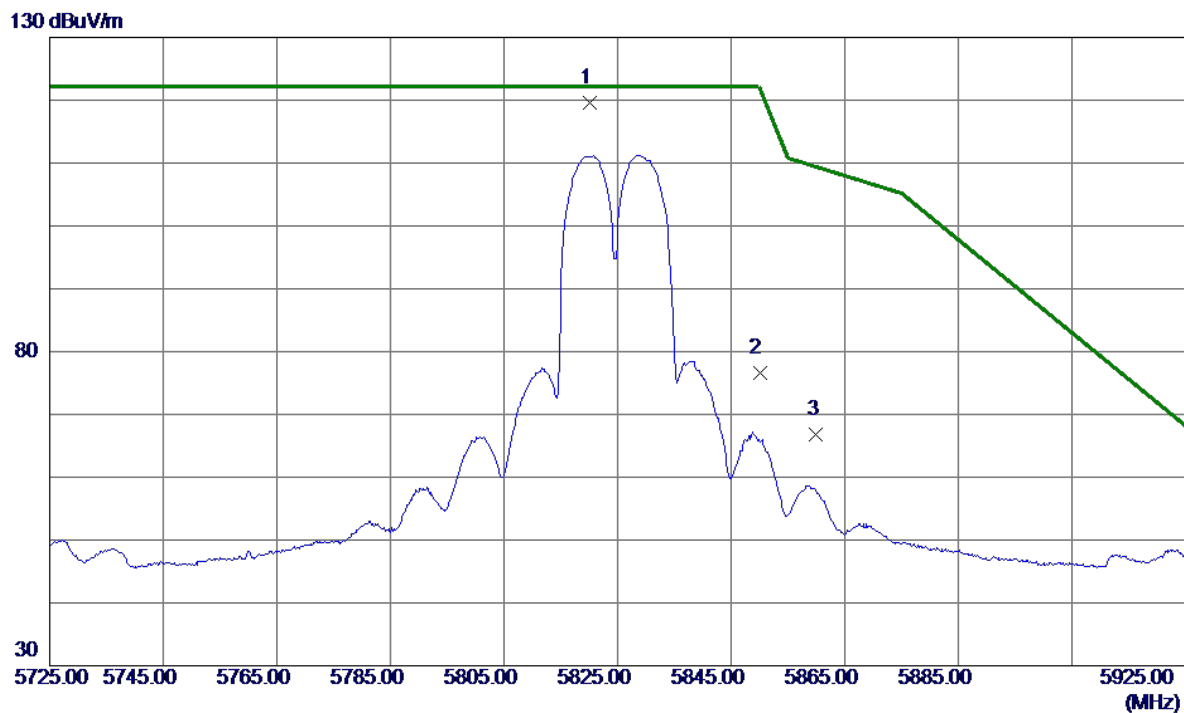


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5820.2000	104.29	15.30	119.59	122.20	-2.61	Peak	No Limit
2	5850.0000	61.30	15.39	76.69	122.20	-45.51	Peak	
3	5860.0000	51.35	15.43	66.78	109.40	-42.62	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

100 dBuV/m

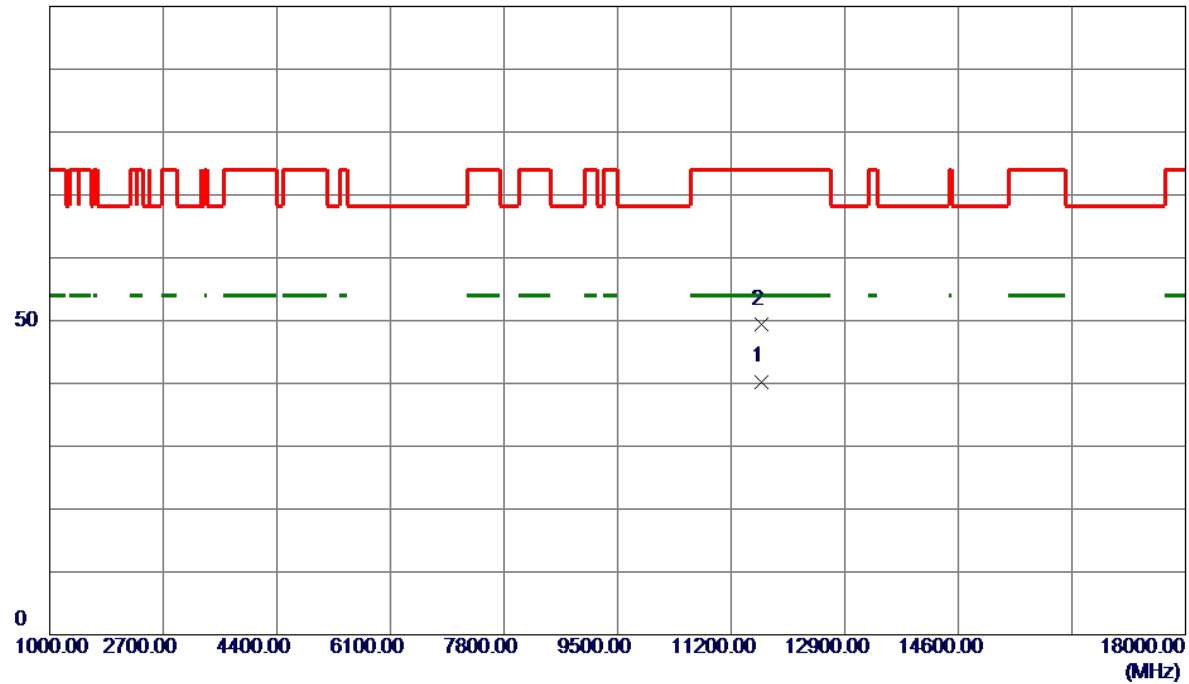


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11649.8500	30.65	9.65	40.30	54.00	-13.70	AVG	
2	11650.1500	39.77	9.65	49.42	74.00	-24.58	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5755 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

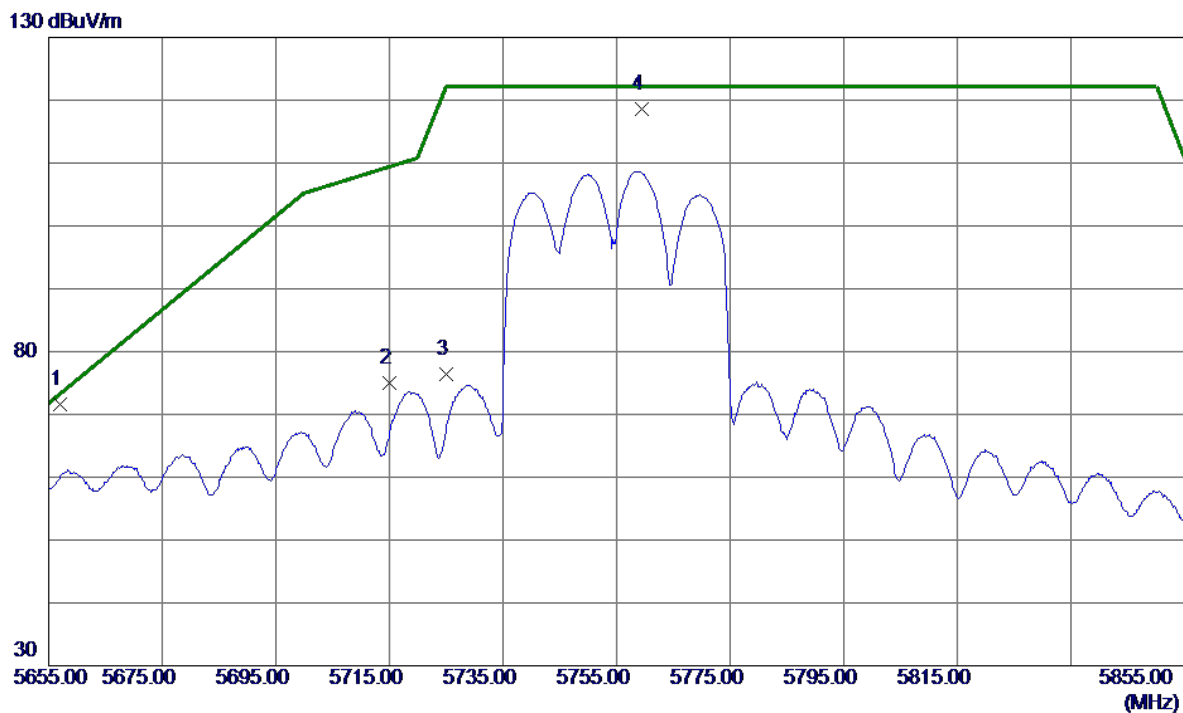


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5656.9000	56.85	14.78	71.63	73.31	-1.68	Peak	
2	5715.0000	60.09	14.97	75.06	109.40	-34.34	Peak	
3	5725.0000	61.33	15.00	76.33	122.20	-45.87	Peak	
4	5759.5000	103.58	15.11	118.69	122.20	-3.51	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5755 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

100 dBuV/m

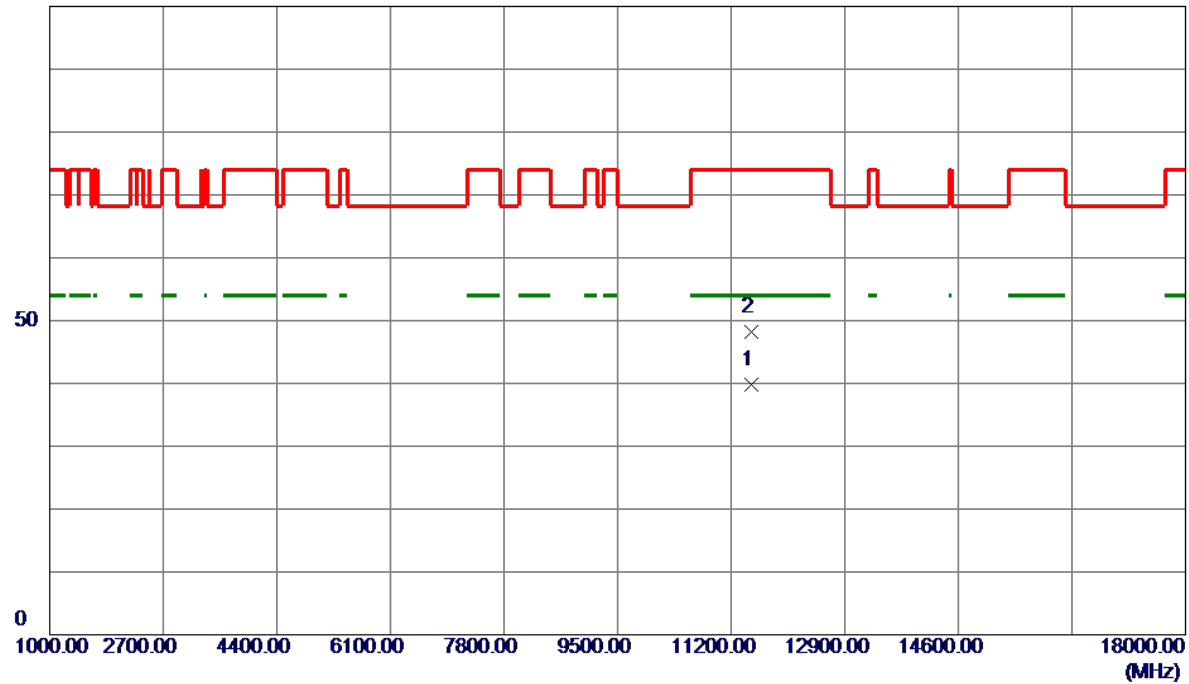


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11509.9500	30.04	9.67	39.71	54.00	-14.29	AVG	
2	11509.9850	38.55	9.67	48.22	74.00	-25.78	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5795 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

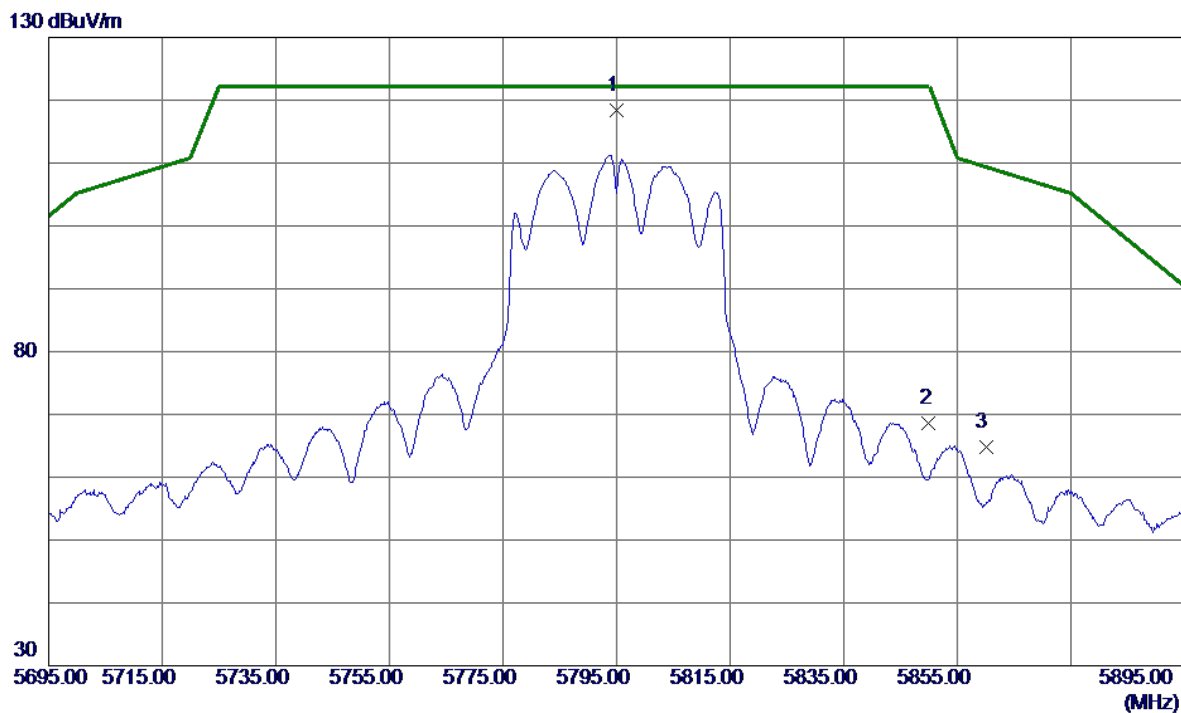


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5795.0000	103.23	15.22	118.45	122.20	-3.75	Peak	No Limit
2	5850.0000	53.21	15.39	68.60	122.20	-53.60	Peak	
3	5860.0000	49.38	15.43	64.81	109.40	-44.59	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5795 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

100 dBuV/m

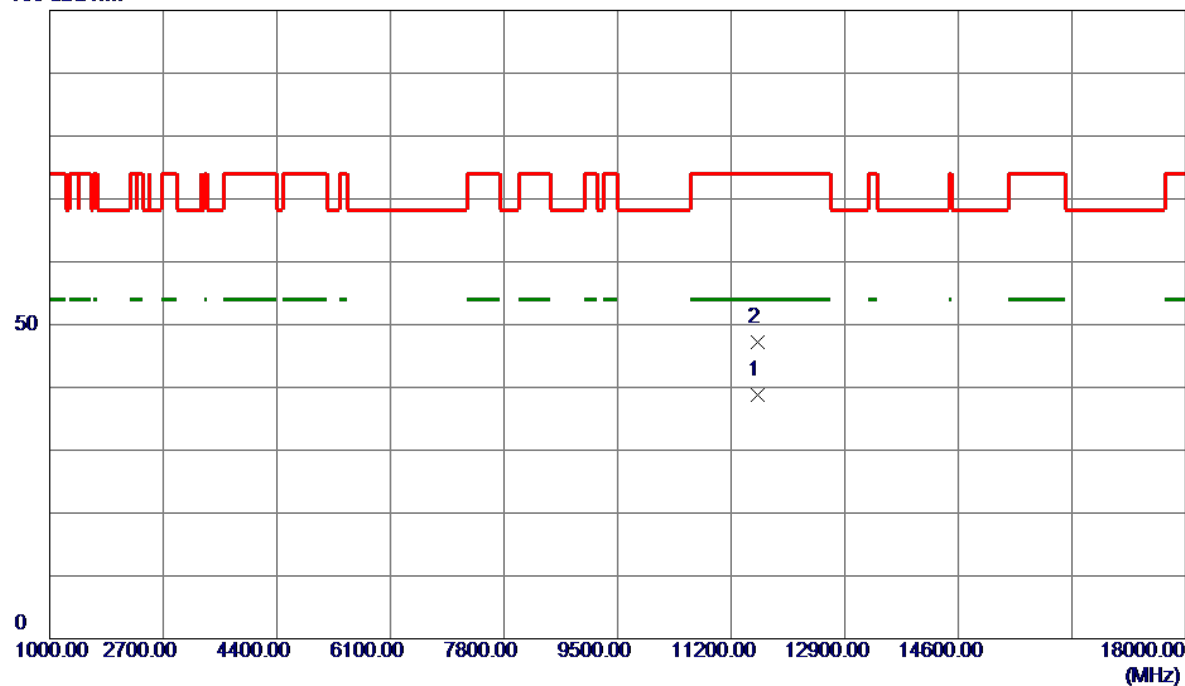


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11589.8900	29.16	9.66	38.82	54.00	-15.18	AVG	
2	11594.4150	37.55	9.66	47.21	74.00	-26.79	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE80) Mode 5775 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

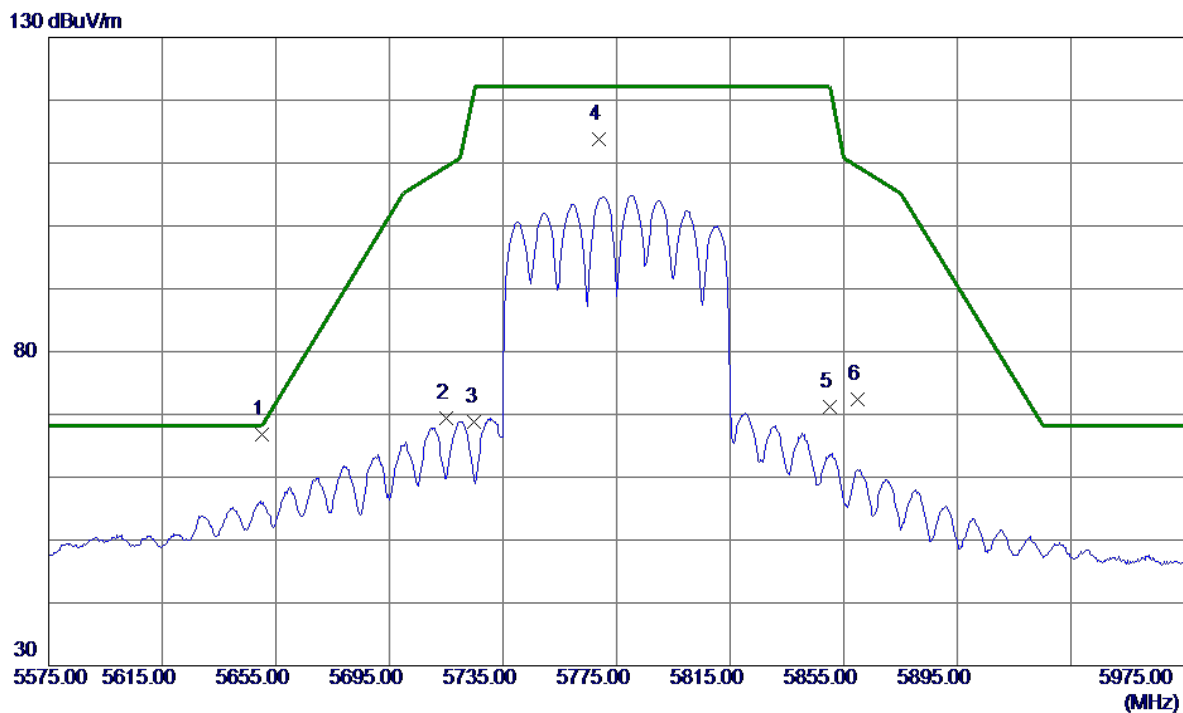


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5650.2000	52.03	14.76	66.79	68.35	-1.56	Peak	
2	5715.0000	54.46	14.97	69.43	109.40	-39.97	Peak	
3	5725.0000	53.80	15.00	68.80	122.20	-53.40	Peak	
4	5768.6000	98.58	15.14	113.72	122.20	-8.48	Peak	No Limit
5	5850.0000	55.87	15.39	71.26	122.20	-50.94	Peak	
6	5860.0000	57.02	15.43	72.45	109.40	-36.95	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE80) Mode 5775 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

100 dBuV/m

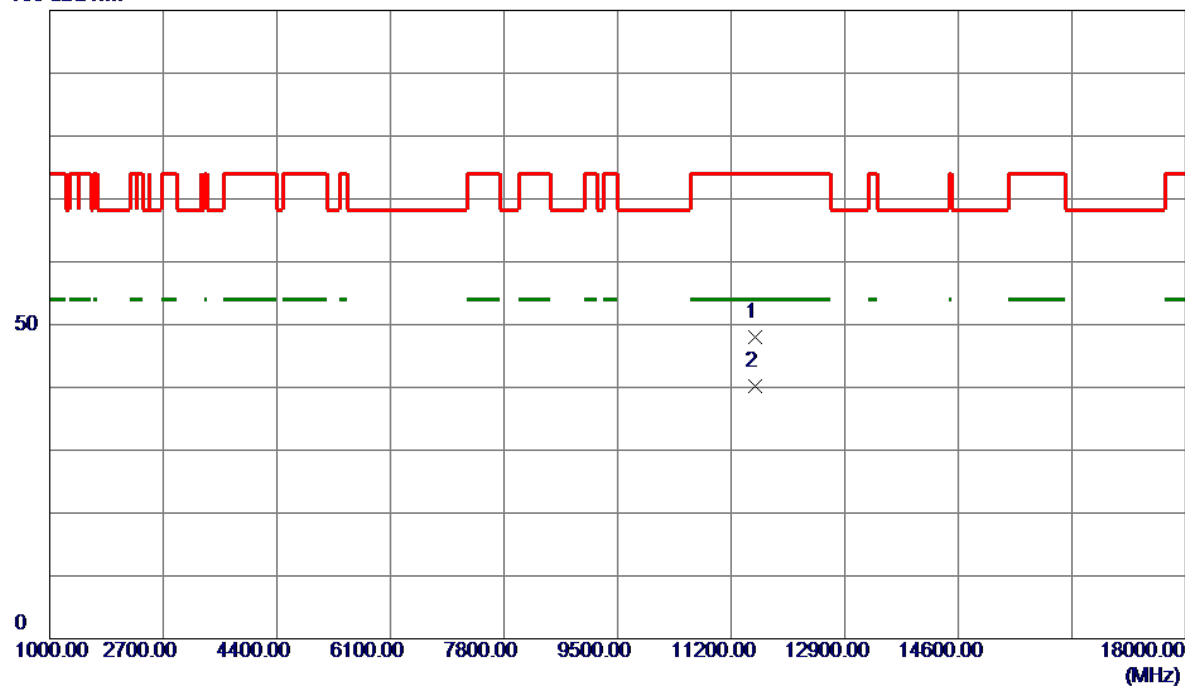


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11549.6900	38.24	9.67	47.91	74.00	-26.09	Peak	
2 *	11549.9500	30.46	9.67	40.13	54.00	-13.87	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Straddle Channel:

Test Mode	UNII-2C_TX A Mode 5720 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

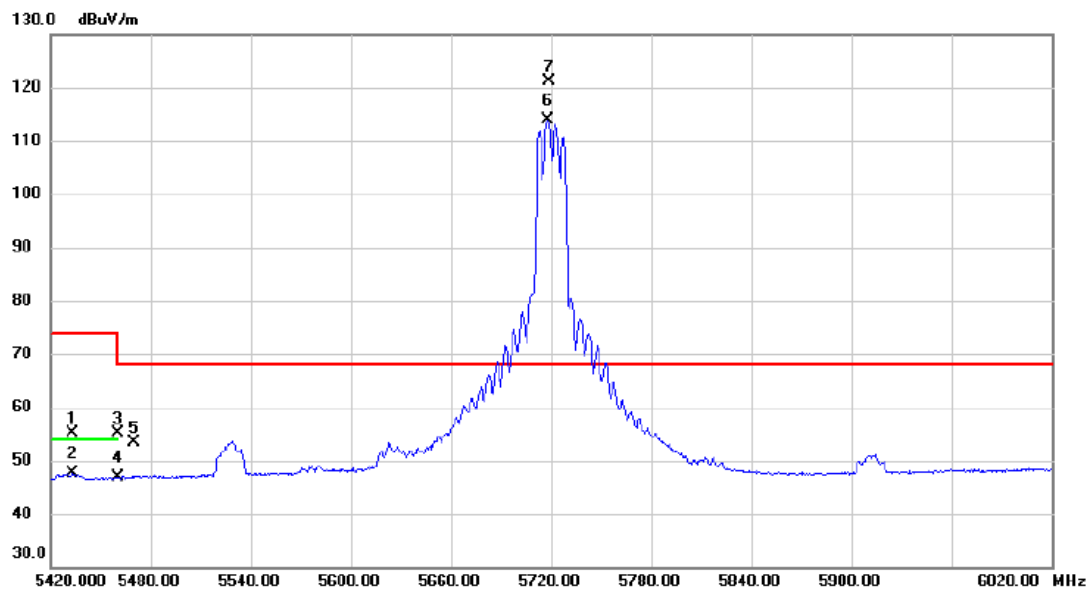


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5433.200	40.87	14.16	55.03	74.00	-18.97	peak	
2		5433.200	33.44	14.16	47.60	54.00	-6.40	AVG	
3		5460.000	40.93	14.21	55.14	74.00	-18.86	peak	
4		5460.000	32.65	14.21	46.86	54.00	-7.14	AVG	
5		5470.000	39.08	14.22	53.30	68.20	-14.90	peak	
6	X	5717.900	98.88	14.98	113.86	68.20	45.66	AVG	No Limit
7	*	5718.500	106.17	14.98	121.15	68.20	52.95	peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5720 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

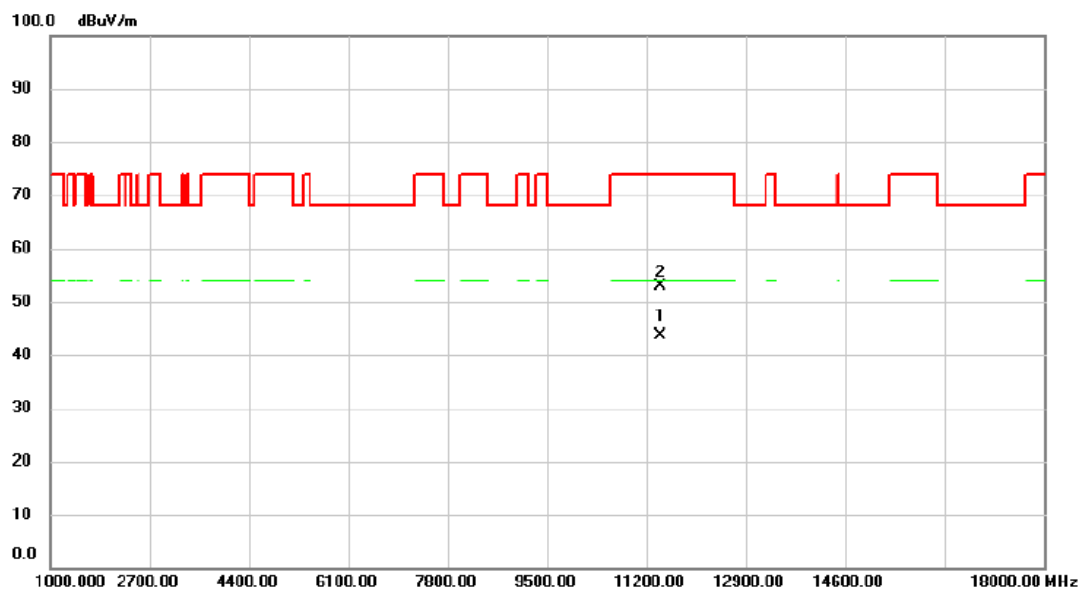


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11441.750	33.95	9.63	43.58	54.00	-10.42	AVG	
2		11442.200	43.36	9.63	52.99	74.00	-21.01	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5720 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

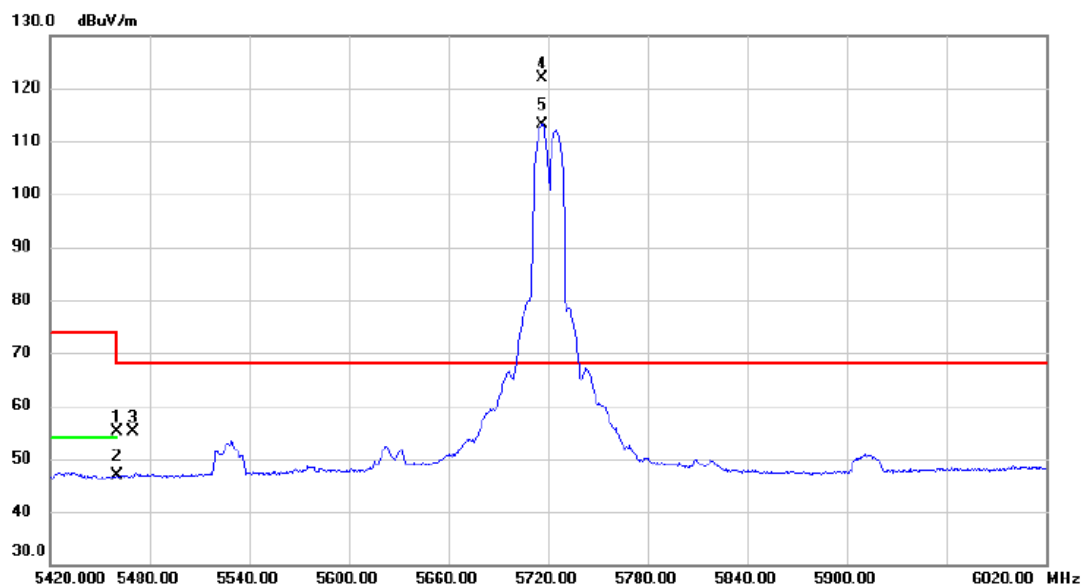


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	40.94	14.21	55.15	74.00	-18.85	peak	
2		5460.000	32.56	14.21	46.77	54.00	-7.23	AVG	
3		5470.000	41.00	14.22	55.22	68.20	-12.98	peak	
4	*	5716.400	107.01	14.97	121.98	68.20	53.78	peak	No Limit
5	X	5716.700	98.20	14.97	113.17	68.20	44.97	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5720 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

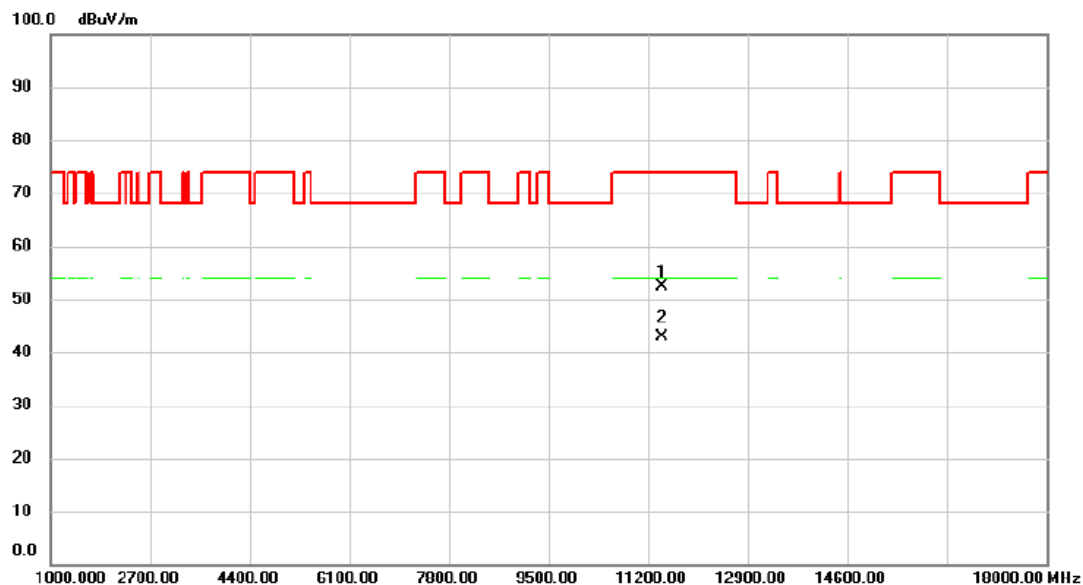

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11442.650	42.81	9.63	52.44	74.00	-21.56	peak	
2	*	11443.150	33.34	9.63	42.97	54.00	-11.03	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.