

TEST REPORT

FCC LTE B26(Part22) Test for TM19FNNABD2
Certification

APPLICANT
LG Electronics Inc.

REPORT NO.
HCT-RF-2412-FC035

DATE OF ISSUE
December 13, 2024

Tested by
Jae Ryang Do



Technical Manager
Jong Seok Lee



HCT CO., LTD.
Bongjai Huh
BongJai Huh / CEO

**HCT CO.,LTD.**

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea
Tel. +82 31 645 6300 Fax. +82 31 645 6401

TEST REPORT

REPORT NO.

HCT-RF-2412-FC035

DATE OF ISSUE

December 13, 2024

Applicant

LG Electronics Inc.

128, Yeoui-daero, Yeongdeungpo-gu, Seoul, Republic of Korea

Product Name

Telematics

Model Name

TM19FNNAHD2

Date of Test

September 30, 2024 ~ December 10, 2024

FCC ID

BEJTM19FNNAHD2

Location of Test

☒ Permanent Testing Lab ☐ On Site Testing

(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea)

FCC Classification:

PCB Licensed Transmitter (PCB)

Test Standard Used

FCC Rule Part: § 22

Test Results

PASS

REVISION HISTORY

The revision history for this test report is shown in table.

| Revision No. | Date of Issue | Description |
|--------------|-------------------|-----------------|
| 0 | December 13, 2024 | Initial Release |

Notice

Content

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section § 2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C. 853(a)

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

The laboratory is not accredited for the test results marked *.

Information provided by the applicant is marked **.

Test results provided by external providers are marked ***.

When confirmation of authenticity of this test report is required, please contact www.hct.co.kr

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

CONTENTS

| | |
|--|-----|
| 1. GENERAL INFORMATION | 5 |
| 1.1. MAXIMUM OUTPUT POWER | 6 |
| 2. INTRODUCTION | 7 |
| 2.1. DESCRIPTION OF EUT | 7 |
| 2.2. MEASURING INSTRUMENT CALIBRATION | 7 |
| 2.3. TEST FACILITY | 7 |
| 3. DESCRIPTION OF TESTS | 8 |
| 3.1 TEST PROCEDURE | 8 |
| 3.2 CONDUCTED OUTPUT POWER | 9 |
| 3.3 RADIATED POWER | 10 |
| 3.4 RADIATED SPURIOUS EMISSIONS | 11 |
| 3.5 PEAK- TO- AVERAGE RATIO | 12 |
| 3.6 OCCUPIED BANDWIDTH. | 13 |
| 3.7 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL | 14 |
| 3.8 BAND EDGE | 15 |
| 3.9 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE | 17 |
| 3.10 WORST CASE(RADIATED TEST) | 18 |
| 3.11 WORST CASE(CONDUCTED TEST) | 19 |
| 4. LIST OF TEST EQUIPMENT | 20 |
| 5. MEASUREMENT UNCERTAINTY | 21 |
| 6. SUMMARY OF TEST RESULTS | 22 |
| 7. SAMPLE CALCULATION | 23 |
| 8. TEST DATA | 25 |
| 8.1 Conducted Output Power | 25 |
| 8.2 EFFECTIVE RADIATED POWER | 30 |
| 8.3 RADIATED SPURIOUS EMISSIONS | 33 |
| 8.4 PEAK-TO-AVERAGE RATIO | 34 |
| 8.5 OCCUPIED BANDWIDTH | 35 |
| 8.6 CONDUCTED SPURIOUS EMISSIONS | 36 |
| 8.7 BAND EDGE | 36 |
| 8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE | 37 |
| 9. TEST PLOTS | 42 |
| 10. ANNEX A_ TEST SETUP PHOTO | 128 |

MEASUREMENT REPORT

1. GENERAL INFORMATION

| | |
|----------------------------|---|
| Applicant Name: | LG Electronics Inc. |
| Address: | 128, Yeoui-daero, Yeongdeungpo-gu, Seoul, Republic of Korea |
| FCC ID: | BEJTM19FNNNAHD2 |
| Application Type: | Certification |
| FCC Classification: | PCB Licensed Transmitter (PCB) |
| FCC Rule Part(s): | § 22 |
| EUT Type: | Telematics |
| Model(s): | TM19FNNNAHD2 |
| Tx Frequency: | 824.7 MHz – 848.3 MHz (LTE – Band 26 (1.4 MHz)) 825.5 MHz – 847.5 MHz (LTE – Band 26 (3 MHz)) 826.5 MHz – 846.5 MHz (LTE – Band 26 (5 MHz)) 829.0 MHz – 844.0 MHz (LTE – Band 26 (10 MHz)) 831.5 MHz – 841.5 MHz (LTE – Band 26 (15 MHz)) |
| Date(s) of Tests: | September 30, 2024 ~ December 10, 2024 |
| Serial number: | Radiated : Honda MY26 #03 Conducted : Honda MY26 #01 |
| Antenna Information | Please refer to the Antenna Approval Specification document. |

1.1. MAXIMUM OUTPUT POWER

| Mode (MHz) | Tx Frequency (MHz) | Emission Designator | Modulation | Conducted Output Power | |
|---------------------|-----------------------|------------------------|------------|------------------------|---------------------|
| | | | | Max. Power (W) | Max. Power (dBm) |
| LTE – Band 26 (1.4) | 824.7 – 848.3 | 1M09G7D | QPSK | 0.192 | 22.84 |
| | | 1M10W7D | 16QAM | 0.165 | 22.17 |
| | | 1M09W7D | 64QAM | 0.129 | 21.10 |
| | | 1M09W7D | 256QAM | 0.064 | 18.09 |
| LTE – Band 26 (3) | 825.5 – 847.5 | 2M71G7D | QPSK | 0.196 | 22.92 |
| | | 2M71W7D | 16QAM | 0.167 | 22.22 |
| | | 2M70W7D | 64QAM | 0.131 | 21.18 |
| | | 2M71W7D | 256QAM | 0.064 | 18.04 |
| LTE – Band 26 (5) | 826.5 – 846.5 | 4M49G7D | QPSK | 0.197 | 22.94 |
| | | 4M50W7D | 16QAM | 0.166 | 22.19 |
| | | 4M52W7D | 64QAM | 0.131 | 21.16 |
| | | 4M50W7D | 256QAM | 0.065 | 18.12 |
| LTE – Band 26 (10) | 829.0 – 844.0 | 8M96G7D | QPSK | 0.194 | 22.87 |
| | | 8M95W7D | 16QAM | 0.171 | 22.33 |
| | | 8M96W7D | 64QAM | 0.130 | 21.13 |
| | | 8M95W7D | 256QAM | 0.069 | 18.37 |
| LTE – Band 26 (15) | 831.5 – 841.5 | 13M5G7D | QPSK | 0.194 | 22.88 |
| | | 13M5W7D | 16QAM | 0.166 | 22.19 |
| | | 13M5W7D | 64QAM | 0.126 | 21.02 |
| | | 13M4W7D | 256QAM | 0.065 | 18.16 |

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Telematics with LTE, Sub 6.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY


The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

| Test Description | Test Procedure Used |
|---|---|
| Occupied Bandwidth | - KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4 |
| Band Edge | - KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7 |
| Spurious and Harmonic Emissions at Antenna Terminal | - KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7 |
| Peak- to- Average Ratio | - KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 |
| Conducted Output Power | - KDB 971168 D01 v03r01 - Section 5.2.4 - ANSI C63.26-2015 - Section 5.2.1 & 5.2.4.2 |
| Frequency stability | - ANSI C63.26-2015 – Section 5.6 |
| Radiated Power | - ANSI C63.26-2015 – Section 5.2.4.4 - KDB 971168 D01 v03r01 – Section 5.8 |
| Radiated Spurious and Harmonic Emissions | - ANSI C63.26-2015 – Section 5.5.3 - KDB 971168 D01 v03r01 – Section 5.8 |

3.2 CONDUCTED OUTPUT POWER

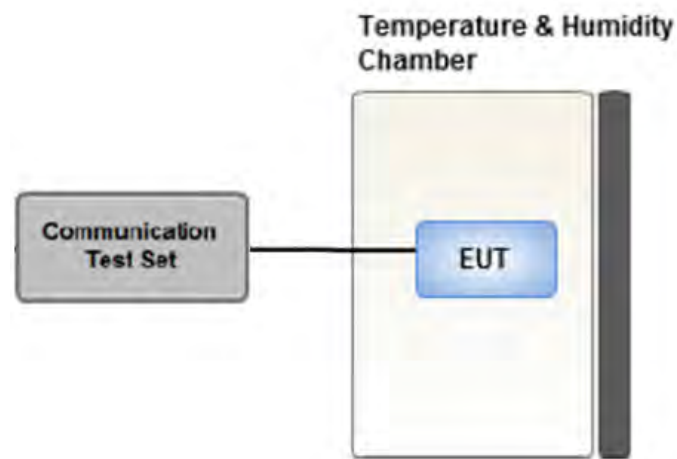

Test setup

Test Overview

When an average power meter is used to perform RF output power measurements, the fundamental condition that measurements be performed only over durations of active transmissions at maximum output power level applies.

Conducted Output Power was tested in accordance with KDB971168 D01 Power Meas License Digital Systems v03r01, Section 5.2.

3.3 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points > 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.4 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW \geq 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $>$ 2 x span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser
if no specific emissions from the EUT are recorded (ie: margin $>$ 20 dB from the applicable limit)
and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets,
and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is
driven by a signal generator and the previously recorded signal was duplicated.
The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_{\text{g}}_{(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: P_{g} is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

3.5 PEAK- TO- AVERAGE RATIO

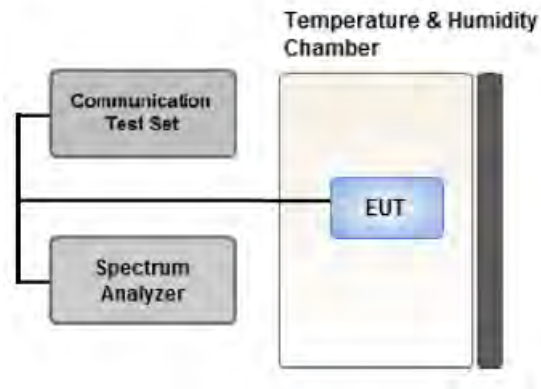


Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

3.6 OCCUPIED BANDWIDTH.

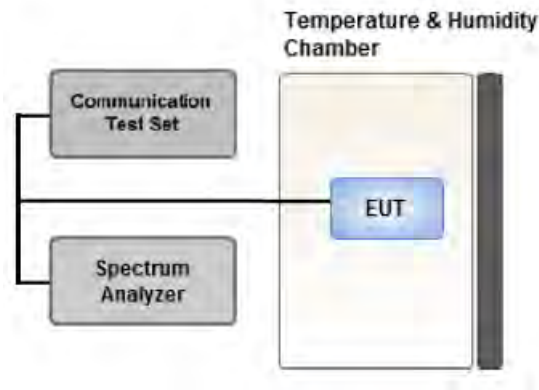

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.7 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

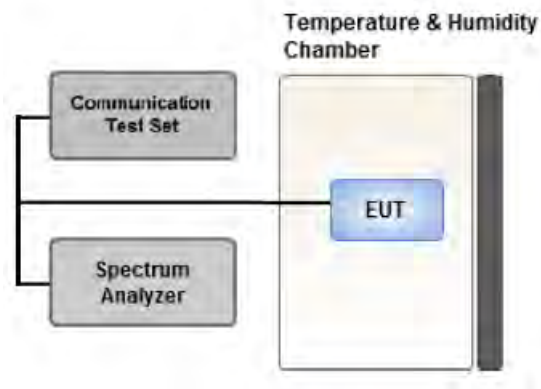

Test setup

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.


All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = Peak
4. Trace Mode = Max Hold
5. Sweep time = auto
6. Number of points in sweep \geq 2 x Span / RBW

3.8 BAND EDGE

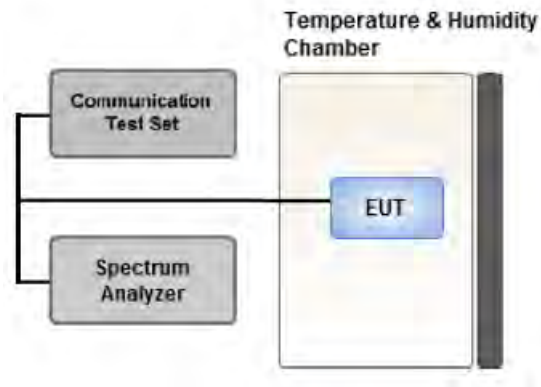

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels (low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Where $\text{Margin} < 1$ dB the emission level is either corrected by $10 \log(1 \text{ MHz} / \text{RB})$ or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

3.9 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

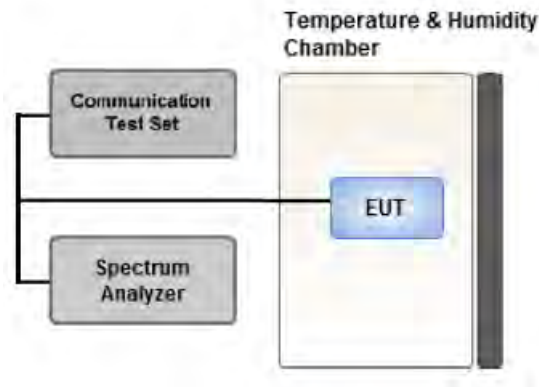

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- .- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.
- .- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.10 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
- All simultaneous transmission scenarios of operation were investigated, and the test results showed no additional significant emissions relative to the least restrictive limit were observed.
Therefore, only the worst case(stand-alone) results were reported.
- In the case of radiated spurious emissions, all bandwidth of operation were investigated and the worst case bandwidth results are reported. (Worst case : 5 MHz)
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data
- Please refer to the table below.

[Worst case]

| Test Description | Modulation | RB size | RB offset | Axis |
|--|-------------------------------------|-----------------|-----------|------|
| Effective Radiated Power | QPSK, 16QAM, 64QAM, 256QAM | See Section 8.2 | | Z |
| Radiated Spurious and Harmonic Emissions | QPSK | See Section 8.3 | | Y |

3.11 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.

[Worst case]

| Test Description | Modulation | Bandwidth (MHz) | Frequency | RB size | RB offset |
|--|-------------------------------------|----------------------|----------------------|---------|-----------|
| Occupied Bandwidth | QPSK, 16QAM, 64QAM, 256QAM | 1.4, 3, 5, 10, 15 | Mid | Full RB | 0 |
| Peak-To-Average Ratio | QPSK, 16QAM, 64QAM, 256QAM | 1.4, 3, 5, 10, 15 | Mid | Full RB | 0 |
| Band Edge | QPSK | 1.4 | Low | 1 | 0 |
| | | | High | 1 | 5 |
| | | 3 | Low | 1 | 0 |
| | | | High | 1 | 14 |
| | | 5 | Low | 1 | 0 |
| | | | High | 1 | 24 |
| | | 10 | Low | 1 | 0 |
| | | | High | 1 | 49 |
| | | 15 | Low | 1 | 0 |
| | | | High | 1 | 74 |
| | | 1.4, 3, 5, 10, 15 | Low, High | Full RB | 0 |
| Spurious and Harmonic Emissions at Antenna Terminal | QPSK | 1.4, 3, 5, 10, 15 | Low, Mid, High | 1 | 0 |

4. LIST OF TEST EQUIPMENT

| Equipment | Model | Manufacture | Serial No. | Due to Calibration | Calibration Interval |
|--|---------------------------|------------------|-------------|--------------------|----------------------|
| RF Switching System | Switch box(1.2 G HPF+LNA) | HCT CO., LTD., | F1L1 | 11/11/2025 | Annual |
| RF Switching System | Switch box(3.3 G HPF+LNA) | HCT CO., LTD., | F1L2 | 11/11/2025 | Annual |
| RF Switching System | Switch box(LNA) | HCT CO., LTD., | F1L4 | 11/11/2025 | Annual |
| RF Switching System | Switch box(6 G HPF+LNA) | HCT CO., LTD., | F1L7 | 11/11/2025 | Annual |
| Power Splitter(DC ~ 26.5 GHz) | 11667B | Hewlett Packard | 5001 | 04/17/2025 | Annual |
| DC Power Supply | E3632A | Agilent | MY40010147 | 08/06/2025 | Annual |
| Dipole Antenna | UHAP | Schwarzbeck | 01274 | 03/10/2026 | Biennial |
| Dipole Antenna | UHAP | Schwarzbeck | 01288 | 08/07/2026 | Biennial |
| Chamber | SU-642 | ESPEC | 93008124 | 02/19/2025 | Annual |
| Horn Antenna(1 ~ 18 GHz) | BBHA 9120D | Schwarzbeck | 147 | 08/17/2025 | Biennial |
| Horn Antenna(1 ~ 18 GHz) | BBHA 9120D | Schwarzbeck | 9120D-1298 | 09/11/2025 | Biennial |
| Horn Antenna(15 ~ 40 GHz) | BBHA 9170 | Schwarzbeck | BBHA9170342 | 09/20/2026 | Biennial |
| Horn Antenna(15 ~ 40 GHz) | BBHA 9170 | Schwarzbeck | BBHA9170124 | 03/28/2025 | Biennial |
| Signal Analyzer(10 Hz ~ 26.5 GHz) | N9020A | Agilent | MY52090906 | 04/19/2025 | Annual |
| ATTENUATOR(20 dB) | 8493C | Hewlett Packard | 17280 | 04/17/2025 | Annual |
| Spectrum Analyzer(10 Hz ~ 40 GHz) | FSV40 | REOHDE & SCHWARZ | 100931 | 08/06/2025 | Annual |
| Base Station | 8960 (E5515C) | Agilent | MY48360800 | 08/05/2025 | Annual |
| Loop Antenna(9 kHz ~ 30 MHz) | FMZB1513 | Schwarzbeck | 1513-333 | 03/07/2026 | Biennial |
| Trilog Broadband Antenna | VULB9168 | Schwarzbeck | 895 | 08/28/2026 | Biennial |
| Trilog Broadband Antenna | VULB9168 | Schwarzbeck | 1135 | 08/19/2026 | Biennial |
| Wideband Radio Communication Tester | MT8821C | Anritsu Corp. | 6262094331 | 11/13/2025 | Annual |
| Wideband Radio Communication Tester | MT8820C | Anritsu Corp. | 6201026545 | 12/11/2024 | Annual |
| SIGNAL GENERATOR (100 kHz ~ 40 GHz) | SMB100A | REOHDE & SCHWARZ | 177633 | 07/26/2025 | Annual |
| Signal Analyzer(5 Hz ~ 40.0 GHz) | N9030B | KEYSIGHT | MY55480167 | 05/17/2025 | Annual |
| FCC LTE Mobile Conducted RF Automation Test Software | - | HCT CO., LTD., | - | - | - |

Note:

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Parameter | Expanded Uncertainty (\pm dB) |
|--|--|
| Conducted Disturbance (150 kHz ~ 30 MHz) | 1.98 (Confidence level about 95 %, $k=2$) |
| Radiated Disturbance (9 kHz ~ 30 MHz) | 4.36 (Confidence level about 95 %, $k=2$) |
| Radiated Disturbance (30 MHz ~ 1 GHz) | 5.70 (Confidence level about 95 %, $k=2$) |
| Radiated Disturbance (1 GHz ~ 18 GHz) | 5.52 (Confidence level about 95 %, $k=2$) |
| Radiated Disturbance (18 GHz ~ 40 GHz) | 5.66 (Confidence level about 95 %, $k=2$) |
| Radiated Disturbance (Above 40 GHz) | 5.58 (Confidence level about 95 %, $k=2$) |

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

| Test Description | FCC Part Section(s) | Test Limit | Test Result |
|--|-----------------------|--|-------------|
| Occupied Bandwidth | § 2.1049 | N/A | PASS |
| Band Edge / Spurious and Harmonic Emissions at Antenna Terminal. | § 2.1051, § 22.917(a) | < 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions | PASS |
| Conducted Output Power | § 2.1046 | N/A | - |
| Peak- to- Average Ratio | § 22.913(d) | < 13 dB | PASS |
| Frequency stability / variation of ambient temperature | § 2.1055, § 22.355 | < 2.5 ppm | PASS |

6.2 Test Condition : Radiated Test

| Test Description | FCC Part Section(s) | Test Limit | Test Result |
|--|-----------------------|---|-------------|
| Effective Radiated Power | § 22.913(a)(5) | < 7 Watts max. ERP | PASS |
| Radiated Spurious and Harmonic Emissions | § 2.1053, § 22.917(a) | < 43 + 10log10 (P[Watts]) for all out-of band emissions | PASS |

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

| Ch./ Freq. | | Measured Level (dBm) | Substitute Level (dBm) | Ant. Gain (dBd) | C.L | Pol. | ERP | |
|------------|------------|-------------------------|---------------------------|--------------------|------|------|-------|-------|
| channel | Freq.(MHz) | | | | | | W | dBm |
| 128 | 824.20 | -21.37 | 38.40 | -10.61 | 0.95 | H | 0.483 | 26.84 |

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

| Ch./ Freq. | | Measured Level (dBm) | Substitute Level (dBm) | Ant. Gain (dBi) | C.L | Pol. | EIRP | |
|------------|------------|-------------------------|---------------------------|--------------------|------|------|-------|-------|
| channel | Freq.(MHz) | | | | | | W | dBm |
| 20175 | 1,732.50 | -15.75 | 18.45 | 9.90 | 1.76 | H | 0.456 | 26.59 |

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW
GSM BW = 249 kHz
G = Phase Modulation
X = Cases not otherwise covered
W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W
GSM BW = 249 kHz
G = Phase Modulation
7 = Quantized/Digital Info
W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W
WCDMA BW = 4.17 MHz
F = Frequency Modulation
9 = Composite Digital Info
W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D
LTE BW = 4.48 MHz
G = Phase Modulation
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D
LTE BW = 4.48 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 Conducted Output Power

| Bandwidth | Modulation | RB Size | RB Offset | Max.Average Power (dBm) | | | Target MPR (dB) | Target Power |
|-----------|------------|---------|-----------|-------------------------|-----------|-----------|-----------------|--------------|
| | | | | 26797 | 26915 | 27033 | | |
| | | | | 824.7 MHz | 836.5 MHz | 848.3 MHz | | |
| 1.4 MHz | QPSK | 1 | 0 | 22.68 | 22.71 | 22.77 | 0 | 23 |
| | | 1 | 3 | 22.75 | 22.84 | 22.74 | 0 | 23 |
| | | 1 | 5 | 22.67 | 22.70 | 22.62 | 0 | 23 |
| | | 3 | 0 | 22.74 | 22.76 | 22.70 | 1 | 22 |
| | | 3 | 1 | 22.79 | 22.82 | 22.77 | 1 | 22 |
| | | 3 | 3 | 22.67 | 22.76 | 22.71 | 1 | 22 |
| | | 6 | 0 | 21.85 | 21.80 | 21.77 | 1 | 22 |
| | 16QAM | 1 | 0 | 22.07 | 22.10 | 21.99 | 1 | 22 |
| | | 1 | 3 | 22.17 | 22.12 | 22.16 | 1 | 22 |
| | | 1 | 5 | 21.92 | 22.11 | 22.01 | 1 | 22 |
| | | 3 | 0 | 21.77 | 21.86 | 21.80 | 2 | 21 |
| | | 3 | 1 | 21.89 | 21.94 | 21.92 | 2 | 21 |
| | | 3 | 3 | 21.82 | 21.82 | 21.73 | 2 | 21 |
| | | 6 | 0 | 20.88 | 20.83 | 20.89 | 2 | 21 |
| | 64QAM | 1 | 0 | 20.89 | 20.92 | 21.06 | 2 | 21 |
| | | 1 | 3 | 21.10 | 21.08 | 21.06 | 2 | 21 |
| | | 1 | 5 | 20.95 | 21.00 | 20.87 | 2 | 21 |
| | | 3 | 0 | 20.90 | 20.97 | 20.92 | 3 | 20 |
| | | 3 | 1 | 20.98 | 20.96 | 20.95 | 3 | 20 |
| | | 3 | 3 | 20.84 | 20.98 | 20.96 | 3 | 20 |
| | | 6 | 0 | 19.86 | 19.78 | 19.87 | 3 | 20 |
| | 256QAM | 1 | 0 | 17.87 | 18.04 | 17.91 | 5 | 18 |
| | | 1 | 3 | 18.09 | 18.00 | 17.99 | 5 | 18 |
| | | 1 | 5 | 17.93 | 17.94 | 17.76 | 5 | 18 |
| | | 3 | 0 | 17.93 | 17.75 | 17.88 | 5 | 18 |
| | | 3 | 1 | 18.01 | 17.79 | 17.96 | 5 | 18 |
| | | 3 | 3 | 17.82 | 17.89 | 17.81 | 5 | 18 |
| | | 6 | 0 | 17.78 | 17.72 | 17.83 | 5 | 18 |

| Bandwidth | Modulation | RB Size | RB Offset | Max.Average Power (dBm) | | | Target MPR (dB) | Target Power |
|-----------|------------|---------|-----------|-------------------------|-----------|-----------|-----------------|--------------|
| | | | | 26805 | 26915 | 27025 | | |
| | | | | 825.5 MHz | 836.5 MHz | 847.5 MHz | | |
| 3 MHz | QPSK | 1 | 0 | 22.83 | 22.88 | 22.75 | 0 | 23 |
| | | 1 | 7 | 22.78 | 22.87 | 22.92 | 0 | 23 |
| | | 1 | 14 | 22.73 | 22.83 | 22.75 | 0 | 23 |
| | | 8 | 0 | 21.90 | 21.88 | 21.84 | 1 | 22 |
| | | 8 | 3 | 21.95 | 21.91 | 21.91 | 1 | 22 |
| | | 8 | 7 | 21.91 | 21.84 | 21.88 | 1 | 22 |
| | | 15 | 0 | 21.90 | 21.82 | 21.86 | 1 | 22 |
| | 16QAM | 1 | 0 | 22.11 | 22.10 | 22.08 | 1 | 22 |
| | | 1 | 7 | 22.09 | 22.22 | 22.17 | 1 | 22 |
| | | 1 | 14 | 21.99 | 22.22 | 22.20 | 1 | 22 |
| | | 8 | 0 | 20.95 | 20.92 | 20.90 | 2 | 21 |
| | | 8 | 3 | 21.04 | 21.01 | 20.93 | 2 | 21 |
| | | 8 | 7 | 20.93 | 20.90 | 20.92 | 2 | 21 |
| | | 15 | 0 | 20.96 | 20.88 | 20.85 | 2 | 21 |
| | 64QAM | 1 | 0 | 21.08 | 21.10 | 21.06 | 2 | 21 |
| | | 1 | 7 | 21.17 | 21.05 | 21.07 | 2 | 21 |
| | | 1 | 14 | 21.09 | 21.18 | 21.07 | 2 | 21 |
| | | 8 | 0 | 19.87 | 19.93 | 19.91 | 3 | 20 |
| | | 8 | 3 | 20.00 | 19.92 | 19.92 | 3 | 20 |
| | | 8 | 7 | 19.92 | 19.91 | 19.92 | 3 | 20 |
| | | 15 | 0 | 19.95 | 19.88 | 19.85 | 3 | 20 |
| | 256QAM | 1 | 0 | 17.90 | 17.90 | 17.92 | 5 | 18 |
| | | 1 | 7 | 17.91 | 18.01 | 18.04 | 5 | 18 |
| | | 1 | 14 | 17.84 | 17.89 | 17.78 | 5 | 18 |
| | | 8 | 0 | 17.85 | 17.85 | 17.85 | 5 | 18 |
| | | 8 | 3 | 17.96 | 17.88 | 17.89 | 5 | 18 |
| | | 8 | 7 | 17.77 | 17.90 | 17.78 | 5 | 18 |
| | | 15 | 0 | 17.82 | 17.88 | 17.81 | 5 | 18 |

| Bandwidth | Modulation | RB Size | RB Offset | Max.Average Power (dBm) | | | Target MPR (dB) | Target Power |
|-----------|------------|---------|-----------|-------------------------|-----------|-----------|-----------------|--------------|
| | | | | 26815 | 26915 | 27015 | | |
| | | | | 826.5 MHz | 836.5 MHz | 846.5 MHz | | |
| 5 MHz | QPSK | 1 | 0 | 22.75 | 22.81 | 22.85 | 0 | 23 |
| | | 1 | 12 | 22.84 | 22.94 | 22.79 | 0 | 23 |
| | | 1 | 24 | 22.80 | 22.85 | 22.76 | 0 | 23 |
| | | 12 | 0 | 21.88 | 21.89 | 21.88 | 1 | 22 |
| | | 12 | 6 | 21.99 | 21.86 | 21.87 | 1 | 22 |
| | | 12 | 11 | 21.93 | 21.92 | 21.87 | 1 | 22 |
| | | 25 | 0 | 21.89 | 21.88 | 21.83 | 1 | 22 |
| | 16QAM | 1 | 0 | 22.15 | 22.13 | 22.18 | 1 | 22 |
| | | 1 | 12 | 22.08 | 22.19 | 22.10 | 1 | 22 |
| | | 1 | 24 | 22.05 | 22.09 | 22.09 | 1 | 22 |
| | | 12 | 0 | 20.95 | 20.92 | 20.87 | 2 | 21 |
| | | 12 | 6 | 20.94 | 20.90 | 20.89 | 2 | 21 |
| | | 12 | 11 | 20.89 | 20.95 | 20.91 | 2 | 21 |
| | | 25 | 0 | 20.94 | 20.91 | 20.90 | 2 | 21 |
| | 64QAM | 1 | 0 | 21.09 | 21.06 | 21.03 | 2 | 21 |
| | | 1 | 12 | 20.93 | 21.16 | 21.12 | 2 | 21 |
| | | 1 | 24 | 21.15 | 21.04 | 21.01 | 2 | 21 |
| | | 12 | 0 | 19.93 | 19.95 | 20.04 | 3 | 20 |
| | | 12 | 6 | 20.01 | 20.01 | 20.00 | 3 | 20 |
| | | 12 | 11 | 19.98 | 19.91 | 19.99 | 3 | 20 |
| | | 25 | 0 | 19.99 | 19.94 | 19.85 | 3 | 20 |
| | 256QAM | 1 | 0 | 17.89 | 18.06 | 18.07 | 5 | 18 |
| | | 1 | 12 | 18.12 | 17.95 | 18.09 | 5 | 18 |
| | | 1 | 24 | 17.90 | 18.12 | 17.90 | 5 | 18 |
| | | 12 | 0 | 17.89 | 17.86 | 17.92 | 5 | 18 |
| | | 12 | 6 | 17.95 | 17.90 | 17.91 | 5 | 18 |
| | | 12 | 11 | 17.87 | 17.85 | 17.81 | 5 | 18 |
| | | 25 | 0 | 17.90 | 17.90 | 17.85 | 5 | 18 |

| Bandwidth | Modulation | RB Size | RB Offset | Max.Average Power (dBm) | | | Target MPR (dB) | Target Power |
|-----------|------------|---------|-----------|-------------------------|-----------|---------|-----------------|--------------|
| | | | | 26740 | 26915 | 26990 | | |
| | | | | 819 MHz | 836.5 MHz | 844 MHz | | |
| 10 MHz | QPSK | 1 | 0 | 22.82 | 22.81 | 22.83 | 0 | 23 |
| | | 1 | 24 | 22.77 | 22.87 | 22.81 | 0 | 23 |
| | | 1 | 49 | 22.70 | 22.81 | 22.71 | 0 | 23 |
| | | 25 | 0 | 21.88 | 21.85 | 21.89 | 1 | 22 |
| | | 25 | 12 | 21.88 | 21.89 | 21.90 | 1 | 22 |
| | | 25 | 24 | 21.74 | 21.86 | 21.86 | 1 | 22 |
| | | 50 | 0 | 21.93 | 21.81 | 21.87 | 1 | 22 |
| | 16QAM | 1 | 0 | 22.27 | 22.26 | 22.31 | 1 | 22 |
| | | 1 | 24 | 22.23 | 22.22 | 22.28 | 1 | 22 |
| | | 1 | 49 | 22.33 | 22.08 | 22.15 | 1 | 22 |
| | | 25 | 0 | 20.98 | 20.91 | 20.97 | 2 | 21 |
| | | 25 | 12 | 20.88 | 20.90 | 20.95 | 2 | 21 |
| | | 25 | 24 | 20.85 | 20.92 | 20.85 | 2 | 21 |
| | | 50 | 0 | 20.90 | 20.83 | 20.78 | 2 | 21 |
| | 64QAM | 1 | 0 | 21.01 | 21.02 | 20.92 | 2 | 21 |
| | | 1 | 24 | 21.07 | 21.09 | 20.99 | 2 | 21 |
| | | 1 | 49 | 21.13 | 21.11 | 21.05 | 2 | 21 |
| | | 25 | 0 | 19.92 | 19.92 | 20.00 | 3 | 20 |
| | | 25 | 12 | 19.96 | 19.88 | 20.03 | 3 | 20 |
| | | 25 | 24 | 19.89 | 19.92 | 19.89 | 3 | 20 |
| | | 50 | 0 | 19.93 | 19.88 | 19.92 | 3 | 20 |
| | 256QAM | 1 | 0 | 17.78 | 17.88 | 17.73 | 5 | 18 |
| | | 1 | 24 | 18.01 | 18.37 | 18.19 | 5 | 18 |
| | | 1 | 49 | 17.92 | 17.89 | 18.19 | 5 | 18 |
| | | 25 | 0 | 17.87 | 17.89 | 17.88 | 5 | 18 |
| | | 25 | 12 | 17.88 | 17.94 | 17.91 | 5 | 18 |
| | | 25 | 24 | 17.74 | 17.86 | 17.87 | 5 | 18 |
| | | 50 | 0 | 17.83 | 17.82 | 17.82 | 5 | 18 |

| Bandwidth | Modulation | RB Size | RB Offset | Max.Average Power (dBm) | | | Target MPR (dB) | Target Power |
|-----------|------------|---------|-----------|-------------------------|-----------|-----------|-----------------|--------------|
| | | | | 26865 | 26915 | 26965 | | |
| | | | | 831.5 MHz | 836.5 MHz | 841.5 MHz | | |
| 15 MHz | QPSK | 1 | 0 | 22.67 | 22.71 | 22.88 | 0 | 23 |
| | | 1 | 36 | 22.57 | 22.75 | 22.67 | 0 | 23 |
| | | 1 | 74 | 22.51 | 22.54 | 22.56 | 0 | 23 |
| | | 36 | 0 | 21.83 | 21.88 | 21.87 | 1 | 22 |
| | | 36 | 18 | 21.78 | 21.83 | 21.76 | 1 | 22 |
| | | 36 | 39 | 21.86 | 21.80 | 21.89 | 1 | 22 |
| | | 75 | 0 | 21.92 | 21.84 | 21.93 | 1 | 22 |
| | 16QAM | 1 | 0 | 21.97 | 22.19 | 22.13 | 1 | 22 |
| | | 1 | 36 | 22.18 | 21.88 | 22.12 | 1 | 22 |
| | | 1 | 74 | 21.97 | 22.17 | 21.83 | 1 | 22 |
| | | 36 | 0 | 20.97 | 20.86 | 20.91 | 2 | 21 |
| | | 36 | 18 | 20.82 | 20.76 | 20.87 | 2 | 21 |
| | | 36 | 39 | 20.80 | 20.84 | 20.85 | 2 | 21 |
| | | 75 | 0 | 20.89 | 20.81 | 20.93 | 2 | 21 |
| | 64QAM | 1 | 0 | 20.88 | 21.02 | 20.88 | 2 | 21 |
| | | 1 | 36 | 20.73 | 20.87 | 20.98 | 2 | 21 |
| | | 1 | 74 | 20.73 | 20.97 | 20.67 | 2 | 21 |
| | | 36 | 0 | 19.87 | 19.98 | 19.92 | 3 | 20 |
| | | 36 | 18 | 19.88 | 19.87 | 19.96 | 3 | 20 |
| | | 36 | 39 | 19.70 | 19.96 | 19.84 | 3 | 20 |
| | | 75 | 0 | 19.80 | 19.80 | 19.90 | 3 | 20 |
| | 256QAM | 1 | 0 | 17.92 | 17.98 | 17.91 | 5 | 18 |
| | | 1 | 36 | 17.96 | 17.87 | 17.92 | 5 | 18 |
| | | 1 | 74 | 18.16 | 17.93 | 17.94 | 5 | 18 |
| | | 36 | 0 | 17.84 | 17.88 | 17.92 | 5 | 18 |
| | | 36 | 18 | 17.83 | 17.82 | 17.84 | 5 | 18 |
| | | 36 | 39 | 17.79 | 17.83 | 17.96 | 5 | 18 |
| | | 75 | 0 | 17.87 | 17.84 | 17.97 | 5 | 18 |

8.2 EFFECTIVE RADIATED POWER

| Freq (MHz) | Mod/ Bandwidth | Modulation | Measured Level (dBm) | Substitute Level (dBm) | Ant. Gain (dBd) | C.L | Pol | Limit | ERP | | RB | |
|---------------|---------------------|------------|-------------------------|------------------------------|--------------------|------|-----|-----------|-------|-------|------|--------|
| | | | | | | | | W | W | dBm | Size | Offset |
| 824.7 | LTE 26 (1.4 MHz) | QPSK | -28.49 | 33.83 | -10.24 | 1.44 | V | < 7.00 | 0.164 | 22.15 | 1 | 3 |
| | | 16-QAM | -29.13 | 33.19 | -10.24 | 1.44 | V | | 0.142 | 21.51 | | |
| | | 64-QAM | -30.15 | 32.17 | -10.24 | 1.44 | V | | 0.112 | 20.49 | | |
| | | 256-QAM | -33.16 | 29.16 | -10.24 | 1.44 | V | | 0.056 | 17.48 | | |
| 836.5 | | QPSK | -28.40 | 34.02 | -10.18 | 1.45 | V | | 0.173 | 22.39 | 1 | 0 |
| | | 16-QAM | -29.10 | 33.32 | -10.18 | 1.45 | V | | 0.148 | 21.69 | | |
| | | 64-QAM | -30.08 | 32.34 | -10.18 | 1.45 | V | | 0.118 | 20.71 | | |
| | | 256-QAM | -33.13 | 29.29 | -10.18 | 1.45 | V | | 0.058 | 17.66 | | |
| 848.3 | | QPSK | -29.21 | 33.48 | -10.12 | 1.45 | V | | 0.155 | 21.91 | 1 | 0 |
| | | 16-QAM | -29.96 | 32.73 | -10.12 | 1.45 | V | | 0.131 | 21.16 | | |
| | | 64-QAM | -30.92 | 31.77 | -10.12 | 1.45 | V | | 0.105 | 20.20 | | |
| | | 256-QAM | -33.97 | 28.72 | -10.12 | 1.45 | V | | 0.052 | 17.15 | | |

| Freq (MHz) | Mod/ Bandwidth | Modulation | Measured Level (dBm) | Substitute Level (dBm) | Ant. Gain (dBd) | C.L | Pol | Limit | ERP | | RB | |
|---------------|-------------------|------------|-------------------------|------------------------------|--------------------|------|-----|-----------|-------|-------|------|--------|
| | | | | | | | | W | W | dBm | Size | Offset |
| 825.5 | LTE 26 (3 MHz) | QPSK | -28.26 | 34.10 | -10.24 | 1.44 | V | < 7.00 | 0.175 | 22.42 | 1 | 14 |
| | | 16-QAM | -28.92 | 33.44 | -10.24 | 1.44 | V | | 0.150 | 21.76 | | |
| | | 64-QAM | -30.09 | 32.27 | -10.24 | 1.44 | V | | 0.115 | 20.59 | | |
| | | 256-QAM | -33.13 | 29.23 | -10.24 | 1.44 | V | | 0.057 | 17.55 | | |
| 836.5 | | QPSK | -28.19 | 34.23 | -10.18 | 1.45 | V | | 0.182 | 22.60 | 1 | 0 |
| | | 16-QAM | -28.86 | 33.56 | -10.18 | 1.45 | V | | 0.156 | 21.93 | | |
| | | 64-QAM | -29.96 | 32.46 | -10.18 | 1.45 | V | | 0.121 | 20.83 | | |
| | | 256-QAM | -32.97 | 29.45 | -10.18 | 1.45 | V | | 0.061 | 17.82 | | |
| 847.5 | | QPSK | -29.20 | 33.52 | -10.12 | 1.45 | V | | 0.157 | 21.95 | 1 | 0 |
| | | 16-QAM | -29.84 | 32.88 | -10.12 | 1.45 | V | | 0.135 | 21.31 | | |
| | | 64-QAM | -30.93 | 31.79 | -10.12 | 1.45 | V | | 0.105 | 20.22 | | |
| | | 256-QAM | -33.93 | 28.79 | -10.12 | 1.45 | V | | 0.053 | 17.22 | | |

| Freq (MHz) | Mod/ Bandwidth | Modulation | Measured Level (dBm) | Substitute Level (dBm) | Ant. Gain (dBd) | C.L | Pol | Limit | ERP | | RB | |
|---------------|-------------------|------------|-------------------------|------------------------------|--------------------|------|-----|-----------|-------|-------|------|--------|
| | | | | | | | | W | W | dBm | Size | Offset |
| 826.5 | LTE 26 (5 MHz) | QPSK | -28.13 | 34.28 | -10.23 | 1.44 | V | < 7.00 | 0.182 | 22.61 | 1 | 24 |
| | | 16-QAM | -28.78 | 33.63 | -10.23 | 1.44 | V | | 0.157 | 21.96 | | |
| | | 64-QAM | -29.94 | 32.47 | -10.23 | 1.44 | V | | 0.120 | 20.80 | | |
| | | 256-QAM | -32.96 | 29.45 | -10.23 | 1.44 | V | | 0.060 | 17.78 | | |
| 836.5 | | QPSK | -28.19 | 34.23 | -10.18 | 1.45 | V | | 0.182 | 22.60 | 1 | 0 |
| | | 16-QAM | -28.81 | 33.61 | -10.18 | 1.45 | V | | 0.158 | 21.98 | | |
| | | 64-QAM | -29.87 | 32.55 | -10.18 | 1.45 | V | | 0.124 | 20.92 | | |
| | | 256-QAM | -32.94 | 29.48 | -10.18 | 1.45 | V | | 0.061 | 17.85 | | |
| 846.5 | | QPSK | -29.07 | 33.69 | -10.13 | 1.45 | V | | 0.163 | 22.11 | 1 | 0 |
| | | 16-QAM | -29.71 | 33.05 | -10.13 | 1.45 | V | | 0.140 | 21.47 | | |
| | | 64-QAM | -30.77 | 31.99 | -10.13 | 1.45 | V | | 0.110 | 20.41 | | |
| | | 256-QAM | -33.80 | 28.96 | -10.13 | 1.45 | V | | 0.055 | 17.38 | | |

| Freq (MHz) | Mod/ Bandwidth | Modulation | Measured Level (dBm) | Substitute Level (dBm) | Ant. Gain (dBd) | C.L | Pol | Limit | ERP | | RB | |
|---------------|--------------------|------------|-------------------------|------------------------------|--------------------|------|-----|-----------|-------|-------|------|--------|
| | | | | | | | | W | W | dBm | Size | Offset |
| 829.0 | LTE 26 (10 MHz) | QPSK | -28.21 | 34.15 | -10.22 | 1.44 | V | < 7.00 | 0.177 | 22.49 | 1 | 49 |
| | | 16-QAM | -28.77 | 33.59 | -10.22 | 1.44 | V | | 0.156 | 21.93 | | |
| | | 64-QAM | -29.98 | 32.38 | -10.22 | 1.44 | V | | 0.118 | 20.72 | | |
| | | 256-QAM | -32.90 | 29.46 | -10.22 | 1.44 | V | | 0.060 | 17.80 | | |
| 836.5 | | QPSK | -28.20 | 34.22 | -10.18 | 1.45 | V | | 0.182 | 22.59 | 1 | 0 |
| | | 16-QAM | -28.72 | 33.70 | -10.18 | 1.45 | V | | 0.161 | 22.07 | | |
| | | 64-QAM | -29.91 | 32.51 | -10.18 | 1.45 | V | | 0.122 | 20.88 | | |
| | | 256-QAM | -33.00 | 29.42 | -10.18 | 1.45 | V | | 0.060 | 17.79 | | |
| 844.0 | | QPSK | -28.62 | 34.02 | -10.14 | 1.45 | V | | 0.175 | 22.43 | 1 | 0 |
| | | 16-QAM | -29.18 | 33.46 | -10.14 | 1.45 | V | | 0.154 | 21.87 | | |
| | | 64-QAM | -30.40 | 32.24 | -10.14 | 1.45 | V | | 0.116 | 20.65 | | |
| | | 256-QAM | -33.49 | 29.15 | -10.14 | 1.45 | V | | 0.057 | 17.56 | | |

| Freq (MHz) | Mod/ Bandwidth | Modulation | Measured Level (dBm) | Substitute Level (dBm) | Ant. Gain (dBd) | C.L | Pol | Limit | ERP | | RB | |
|---------------|--------------------|------------|-------------------------|------------------------------|--------------------|------|-----|-----------|-------|-------|------|--------|
| | | | | | | | | W | W | dBm | Size | Offset |
| 831.5 | LTE 26 (15 MHz) | QPSK | -28.22 | 34.12 | -10.20 | 1.45 | V | < 7.00 | 0.177 | 22.47 | 1 | 38 |
| | | 16-QAM | -29.01 | 33.33 | -10.20 | 1.45 | V | | 0.147 | 21.68 | | |
| | | 64-QAM | -29.98 | 32.36 | -10.20 | 1.45 | V | | 0.118 | 20.71 | | |
| | | 256-QAM | -33.01 | 29.33 | -10.20 | 1.45 | V | | 0.059 | 17.68 | | |
| 836.5 | | QPSK | -28.21 | 34.21 | -10.18 | 1.45 | V | | 0.181 | 22.58 | 1 | 0 |
| | | 16-QAM | -28.86 | 33.56 | -10.18 | 1.45 | V | | 0.156 | 21.93 | | |
| | | 64-QAM | -29.95 | 32.47 | -10.18 | 1.45 | V | | 0.121 | 20.84 | | |
| | | 256-QAM | -32.97 | 29.45 | -10.18 | 1.45 | V | | 0.061 | 17.82 | | |
| 841.5 | | QPSK | -28.29 | 34.18 | -10.15 | 1.45 | V | | 0.181 | 22.58 | 1 | 0 |
| | | 16-QAM | -28.82 | 33.65 | -10.15 | 1.45 | V | | 0.160 | 22.05 | | |
| | | 64-QAM | -29.99 | 32.48 | -10.15 | 1.45 | V | | 0.122 | 20.88 | | |
| | | 256-QAM | -33.02 | 29.45 | -10.15 | 1.45 | V | | 0.061 | 17.85 | | |

8.3 RADIATED SPURIOUS EMISSIONS

■ MODE: LTE 26
 ■ MODULATION SIGNAL: 5 MHz QPSK
 ■ DISTANCE: 3 meters

| Ch | Freq (MHz) | Measured Level (dBm) | Ant. Gain (dBi) | Substitute Level (dBm) | C.L | Pol | Result (dBm) | Limit | RB | |
|------------------|------------|----------------------|-----------------|------------------------|------|-----|--------------|--------|------|--------|
| | | | | | | | | | Size | Offset |
| 26815 (826.5) | 1 653.00 | -39.49 | 9.61 | -55.04 | 2.02 | V | -47.45 | -13.00 | 1 | 24 |
| | 2 479.50 | -47.08 | 10.34 | -58.30 | 2.55 | H | -50.51 | -13.00 | | |
| | 3 306.00 | -48.68 | 12.18 | -58.00 | 2.97 | V | -48.79 | -13.00 | | |
| 26915 (836.5) | 1 673.00 | -36.95 | 9.72 | -52.60 | 2.05 | V | -44.93 | -13.00 | 1 | 0 |
| | 2 509.50 | -47.62 | 10.59 | -58.79 | 2.51 | H | -50.71 | -13.00 | | |
| | 3 346.00 | -47.91 | 12.37 | -57.70 | 2.96 | V | -48.29 | -13.00 | | |
| 27015 (846.5) | 1 693.00 | -37.73 | 9.85 | -53.26 | 2.07 | H | -45.48 | -13.00 | 1 | 0 |
| | 2 539.50 | -46.71 | 10.67 | -57.76 | 2.53 | H | -49.62 | -13.00 | | |
| | 3 386.00 | -48.47 | 12.52 | -58.50 | 2.99 | V | -48.97 | -13.00 | | |

8.4 PEAK-TO-AVERAGE RATIO

| Band | Band Width | Frequency (MHz) | Modulation | Resource Block Size | Resource Block Offset | Data (dB) |
|------|------------|-----------------|------------|---------------------|-----------------------|-----------|
| 26 | 1.4 MHz | 836.5 | QPSK | 6 | 0 | 5.46 |
| | | | 16-QAM | | | 6.15 |
| | | | 64-QAM | | | 6.78 |
| | | | 256-QAM | | | 6.84 |
| | 3 MHz | | QPSK | 15 | | 5.31 |
| | | | 16-QAM | | | 6.08 |
| | | | 64-QAM | | | 6.70 |
| | | | 256-QAM | | | 6.73 |
| | 5 MHz | | QPSK | 25 | | 5.24 |
| | | | 16-QAM | | | 6.06 |
| | | | 64-QAM | | | 6.66 |
| | | | 256-QAM | | | 6.71 |
| | 10 MHz | | QPSK | 50 | | 5.14 |
| | | | 16-QAM | | | 5.97 |
| | | | 64-QAM | | | 6.59 |
| | | | 256-QAM | | | 6.61 |
| | 15 MHz | | QPSK | 75 | | 5.03 |
| | | | 16-QAM | | | 5.91 |
| | | | 64-QAM | | | 6.58 |
| | | | 256-QAM | | | 6.61 |

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 63 ~ 82

8.5 OCCUPIED BANDWIDTH

| Band | Band Width | Frequency (MHz) | Modulation | Resource Block Size | Resource Block Offset | Data (MHz) |
|------|------------|-----------------|------------|---------------------|-----------------------|------------|
| 26 | 1.4 MHz | 836.5 | QPSK | 6 | 0 | 1.0900 |
| | | | 16-QAM | | | 1.0963 |
| | | | 64-QAM | | | 1.0931 |
| | | | 256-QAM | | | 1.0928 |
| | 3 MHz | | QPSK | 15 | | 2.7089 |
| | | | 16-QAM | | | 2.7107 |
| | | | 64-QAM | | | 2.7039 |
| | | | 256-QAM | | | 2.7113 |
| | 5 MHz | | QPSK | 25 | | 4.4907 |
| | | | 16-QAM | | | 4.5028 |
| | | | 64-QAM | | | 4.5165 |
| | | | 256-QAM | | | 4.5042 |
| | 10 MHz | | QPSK | 50 | | 8.9601 |
| | | | 16-QAM | | | 8.9474 |
| | | | 64-QAM | | | 8.9625 |
| | | | 256-QAM | | | 8.9530 |
| | 15 MHz | | QPSK | 75 | | 13.451 |
| | | | 16-QAM | | | 13.466 |
| | | | 64-QAM | | | 13.454 |
| | | | 256-QAM | | | 13.439 |

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 43 ~ 62.

8.6 CONDUCTED SPURIOUS EMISSIONS

| Band | Band Width (MHz) | Frequency (MHz) | Frequency of Maximum Harmonic (GHz) | Factor (dB) | Measurement Maximum Data (dBm) | Result (dBm) | Limit (dBm) |
|------|------------------|-----------------|-------------------------------------|-------------|--------------------------------|--------------|-------------|
| 26 | 1.4 | 824.7 | 3.7020 | 28.112 | -57.894 | -29.782 | -13.00 |
| | | 836.5 | 3.6910 | 28.112 | -56.363 | -28.251 | |
| | | 848.3 | 3.0753 | 28.112 | -57.557 | -29.445 | |
| | 3 | 826.5 | 2.3575 | 28.112 | -57.586 | -29.474 | |
| | | 836.5 | 2.5424 | 28.112 | -57.337 | -29.225 | |
| | | 846.5 | 3.1785 | 28.112 | -57.487 | -29.375 | |
| | 5 | 826.5 | 2.4612 | 28.112 | -57.953 | -29.841 | |
| | | 836.5 | 3.7010 | 28.112 | -57.897 | -29.785 | |
| | | 846.5 | 6.5344 | 28.634 | -57.215 | -28.581 | |
| | 10 | 829.0 | 3.7184 | 28.112 | -57.402 | -29.290 | |
| | | 836.5 | 3.6760 | 28.112 | -57.528 | -29.416 | |
| | | 844.0 | 3.7049 | 28.112 | -58.240 | -30.128 | |
| | 15 | 831.5 | 3.2997 | 28.112 | -57.732 | -29.620 | |
| | | 836.5 | 3.6945 | 28.112 | -57.634 | -29.522 | |
| | | 841.5 | 3.1995 | 28.112 | -57.522 | -29.410 | |

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 113 ~ 127.
2. Conducted Spurious Emissions was tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Ext. Attenuator + Power Splitter

| Frequency Range (GHz) | Factor [dB] |
|-----------------------|-------------|
| 0.03 – 1 | 27.500 |
| 1 – 5 | 28.112 |
| 5 – 10 | 28.634 |
| 10 – 15 | 29.245 |
| 15 – 20 | 29.511 |
| Above 20(26.5) | 30.210 |


8.7 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 83 ~ 112.

8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


| | |
|----------------------|--------------------------------|
| MODE: | <u>LTE 26</u> |
| OPERATING FREQUENCY: | <u>836,500,000 Hz</u> |
| CHANNEL: | <u>26915 (1.4 MHz)</u> |
| REFERENCE VOLTAGE: | <u>13.200 VDC</u> |
| DEVIATION LIMIT: | <u>± 0.000 25 % or 2.5 ppm</u> |

| Voltage | Power | Temp. | Frequency | Frequency | Deviation | ppm |
|---------|--------|----------|-------------|------------|------------|--------|
| (%) | (VDC) | (°C) | (Hz) | Error (Hz) | (%) | |
| 100 % | 13.200 | +20(Ref) | 836 500 003 | 0.0 | 0.000 000 | 0.000 |
| 100 % | | -30 | 836 499 999 | -4.2 | -0.000 001 | -0.005 |
| 100 % | | -20 | 836 500 011 | 7.7 | 0.000 001 | 0.009 |
| 100 % | | -10 | 836 499 994 | -9.4 | -0.000 001 | -0.011 |
| 100 % | | 0 | 836 500 006 | 3.3 | 0.000 000 | 0.004 |
| 100 % | | +10 | 836 500 001 | -1.9 | 0.000 000 | -0.002 |
| 100 % | | +30 | 836 499 999 | -4.2 | -0.000 001 | -0.005 |
| 100 % | | +40 | 836 499 999 | -4.2 | -0.000 001 | -0.005 |
| 100 % | | +50 | 836 499 996 | -6.7 | -0.000 001 | -0.008 |
| 115 % | | +20 | 836 499 997 | -6.3 | -0.000 001 | -0.008 |
| 85 % | | +20 | 836 500 006 | 3.5 | 0.000 000 | 0.004 |

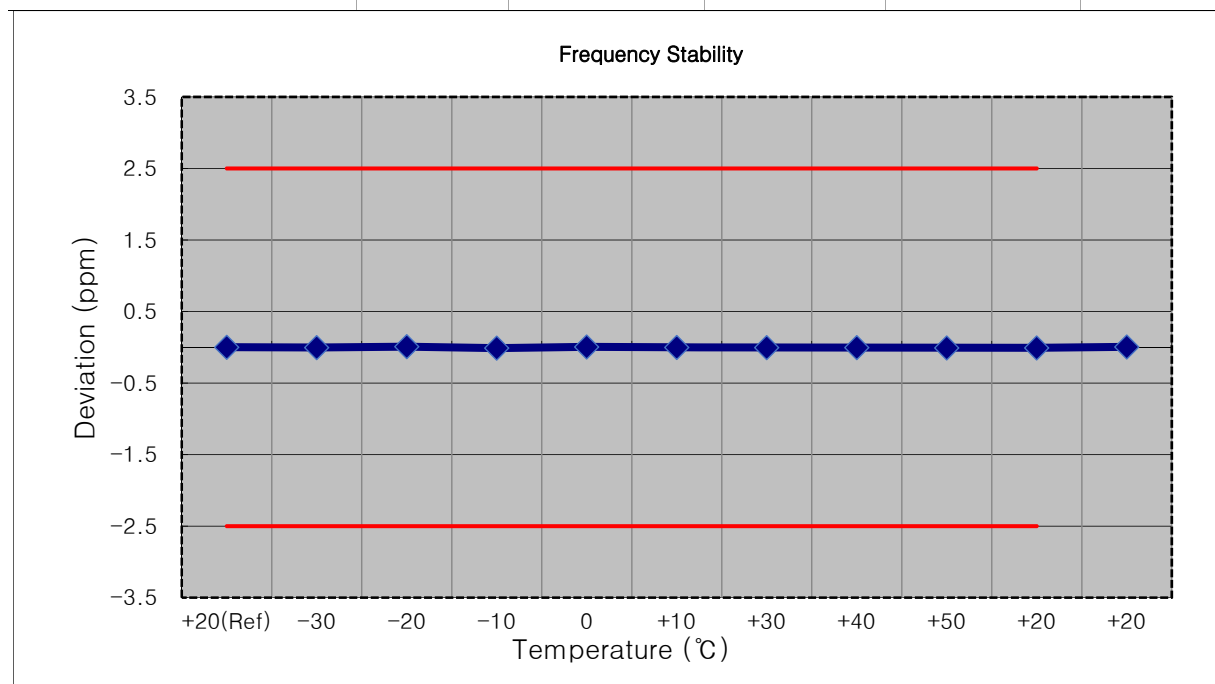


| | |
|----------------------|--------------------------------|
| MODE: | <u>LTE 26</u> |
| OPERATING FREQUENCY: | <u>836,500,000 Hz</u> |
| CHANNEL: | <u>26915 (3 MHz)</u> |
| REFERENCE VOLTAGE: | <u>13.200 VDC</u> |
| DEVIATION LIMIT: | <u>± 0.000 25 % or 2.5 ppm</u> |

| Voltage | Power | Temp. | Frequency | Frequency | Deviation | ppm |
|---------|--------|----------|-------------|------------|-----------|--------|
| (%) | (VDC) | (°C) | (Hz) | Error (Hz) | (%) | |
| 100 % | 13.200 | +20(Ref) | 836 500 003 | 0.0 | 0.000 000 | 0.000 |
| 100 % | | -30 | 836 500 011 | 8.5 | 0.000 001 | 0.010 |
| 100 % | | -20 | 836 500 009 | 6.0 | 0.000 001 | 0.007 |
| 100 % | | -10 | 836 500 007 | 4.3 | 0.000 001 | 0.005 |
| 100 % | | 0 | 836 500 006 | 3.0 | 0.000 000 | 0.004 |
| 100 % | | +10 | 836 500 001 | -1.9 | 0.000 000 | -0.002 |
| 100 % | | +30 | 836 499 999 | -4.0 | 0.000 000 | -0.005 |
| 100 % | | +40 | 836 500 009 | 6.6 | 0.000 001 | 0.008 |
| 100 % | | +50 | 836 500 008 | 5.5 | 0.000 001 | 0.007 |
| 115 % | | +20 | 836 500 006 | 3.7 | 0.000 000 | 0.004 |
| 85 % | | +20 | 836 500 006 | 3.4 | 0.000 000 | 0.004 |

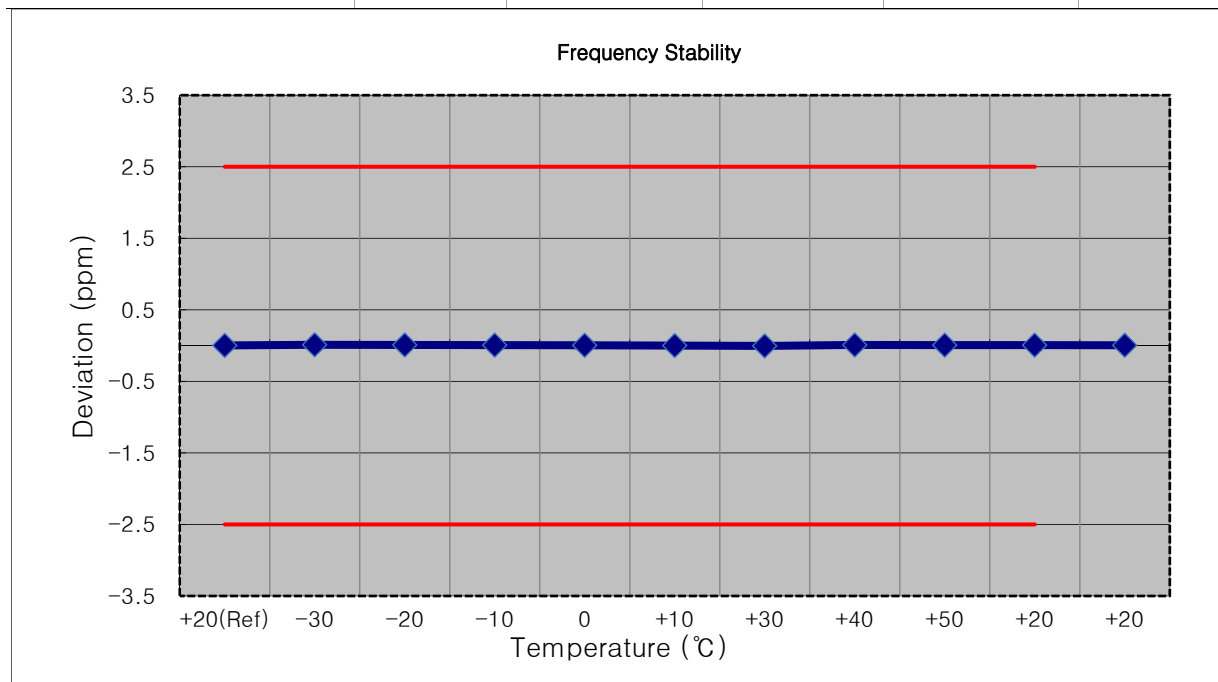


| | |
|----------------------|--------------------------------|
| MODE: | <u>LTE 26</u> |
| OPERATING FREQUENCY: | <u>836,500,000 Hz</u> |
| CHANNEL: | <u>26915 (5 MHz)</u> |
| REFERENCE VOLTAGE: | <u>13.200 VDC</u> |
| DEVIATION LIMIT: | <u>± 0.000 25 % or 2.5 ppm</u> |

| Voltage | Power | Temp. | Frequency | Frequency | Deviation | ppm |
|---------|--------|----------|-------------|------------|-----------|-------|
| (%) | (VDC) | (°C) | (Hz) | Error (Hz) | (%) | |
| 100 % | 13.200 | +20(Ref) | 836 500 008 | 0.0 | 0.000 000 | 0.000 |
| 100 % | | -30 | 836 500 016 | 8.4 | 0.000 001 | 0.010 |
| 100 % | | -20 | 836 500 015 | 7.4 | 0.000 001 | 0.009 |
| 100 % | | -10 | 836 500 015 | 7.2 | 0.000 001 | 0.009 |
| 100 % | | 0 | 836 500 013 | 5.0 | 0.000 001 | 0.006 |
| 100 % | | +10 | 836 500 013 | 5.2 | 0.000 001 | 0.006 |
| 100 % | | +30 | 836 500 011 | 3.3 | 0.000 000 | 0.004 |
| 100 % | | +40 | 836 500 012 | 4.2 | 0.000 001 | 0.005 |
| 100 % | | +50 | 836 500 012 | 3.7 | 0.000 000 | 0.004 |
| 115 % | | +20 | 836 500 012 | 4.5 | 0.000 001 | 0.005 |
| 85 % | | +20 | 836 500 011 | 2.6 | 0.000 000 | 0.003 |

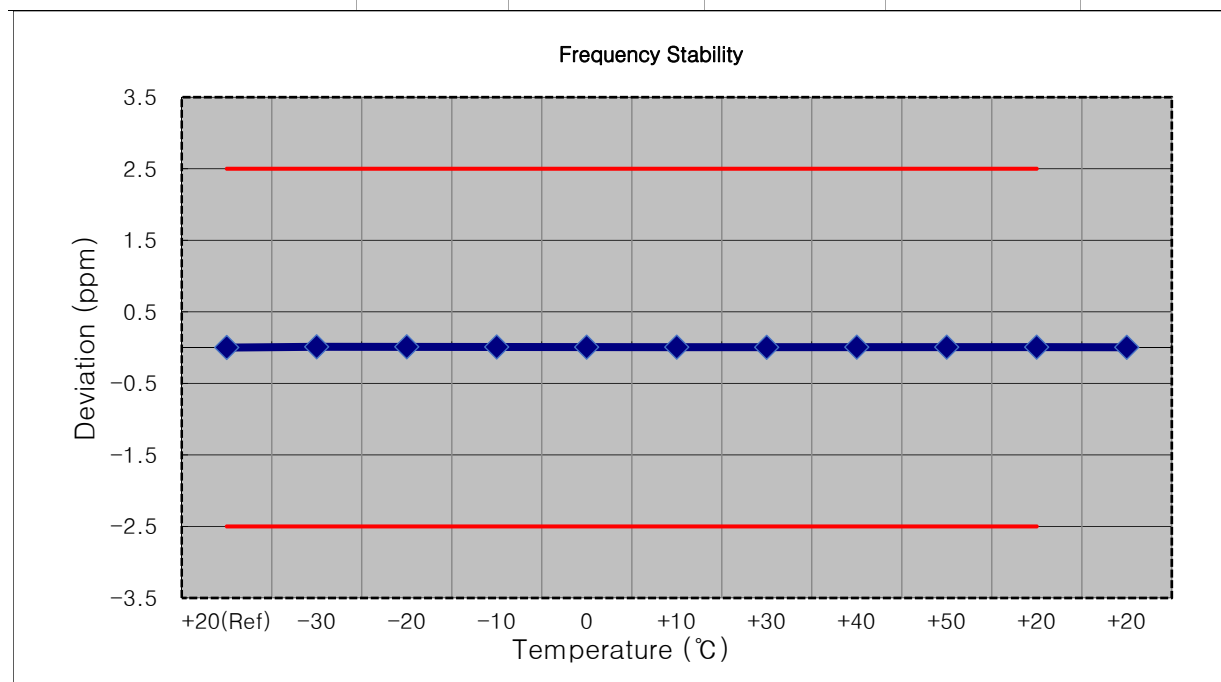


| | |
|----------------------|--------------------------------|
| MODE: | <u>LTE 26</u> |
| OPERATING FREQUENCY: | <u>836,500,000 Hz</u> |
| CHANNEL: | <u>26915 (10 MHz)</u> |
| REFERENCE VOLTAGE: | <u>13.200 VDC</u> |
| DEVIATION LIMIT: | <u>± 0.000 25 % or 2.5 ppm</u> |

| Voltage | Power | Temp. | Frequency | Frequency | Deviation | ppm |
|---------|--------|----------|-------------|------------|-----------|-------|
| (%) | (VDC) | (°C) | (Hz) | Error (Hz) | (%) | |
| 100 % | 13.200 | +20(Ref) | 836 499 998 | 0.0 | 0.000 000 | 0.000 |
| 100 % | | -30 | 836 500 006 | 7.6 | 0.000 001 | 0.009 |
| 100 % | | -20 | 836 500 007 | 8.5 | 0.000 001 | 0.010 |
| 100 % | | -10 | 836 500 010 | 11.5 | 0.000 001 | 0.014 |
| 100 % | | 0 | 836 500 006 | 8.2 | 0.000 001 | 0.010 |
| 100 % | | +10 | 836 500 004 | 6.2 | 0.000 001 | 0.007 |
| 100 % | | +30 | 836 500 004 | 6.0 | 0.000 001 | 0.007 |
| 100 % | | +40 | 836 500 007 | 8.4 | 0.000 001 | 0.010 |
| 100 % | | +50 | 836 500 003 | 4.7 | 0.000 001 | 0.006 |
| 115 % | | +20 | 836 500 003 | 5.3 | 0.000 001 | 0.006 |
| 85 % | | +20 | 836 500 002 | 3.9 | 0.000 000 | 0.005 |

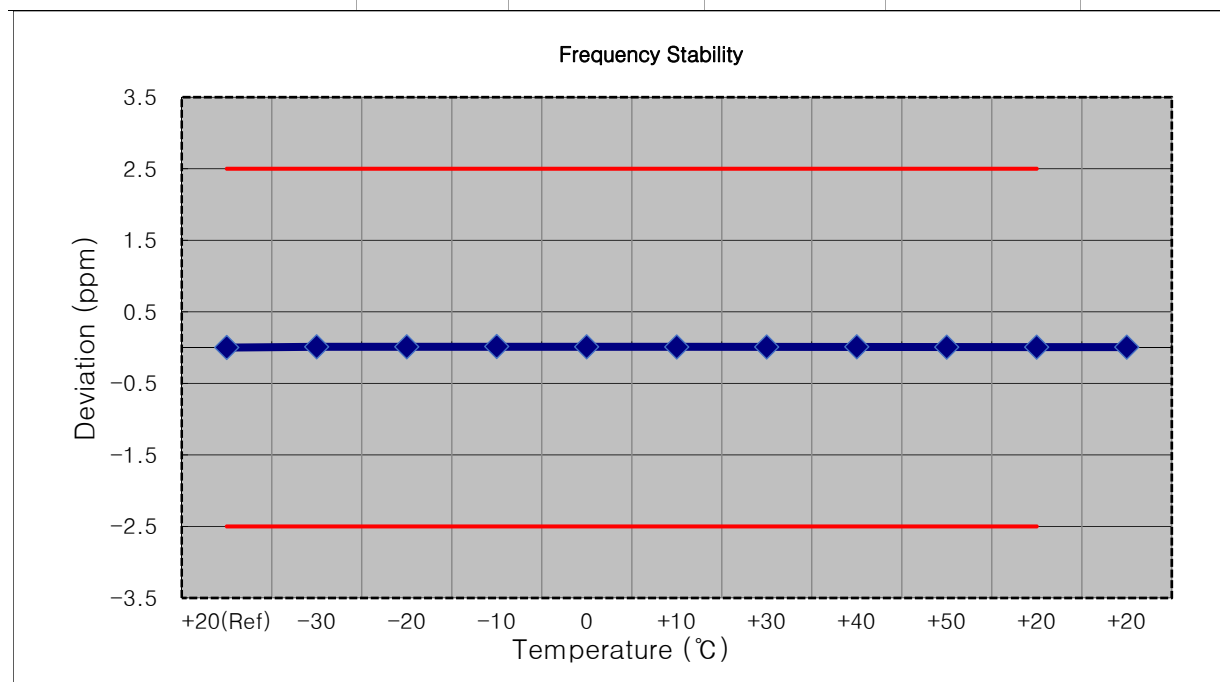


| | |
|----------------------|--------------------------------|
| MODE: | <u>LTE 26</u> |
| OPERATING FREQUENCY: | <u>836,500,000 Hz</u> |
| CHANNEL: | <u>26915 (15 MHz)</u> |
| REFERENCE VOLTAGE: | <u>13.200 VDC</u> |
| DEVIATION LIMIT: | <u>± 0.000 25 % or 2.5 ppm</u> |

| Voltage | Power | Temp. | Frequency | Frequency | Deviation | ppm |
|---------|--------|----------|-------------|------------|-----------|-------|
| (%) | (VDC) | (°C) | (Hz) | Error (Hz) | (%) | |
| 100 % | 13.200 | +20(Ref) | 836 500 008 | 0.0 | 0.000 000 | 0.000 |
| 100 % | | -30 | 836 500 006 | 7.5 | 0.000 001 | 0.009 |
| 100 % | | -20 | 836 500 004 | 6.2 | 0.000 001 | 0.007 |
| 100 % | | -10 | 836 500 006 | 8.1 | 0.000 001 | 0.010 |
| 100 % | | 0 | 836 500 004 | 6.3 | 0.000 001 | 0.008 |
| 100 % | | +10 | 836 500 003 | 4.8 | 0.000 001 | 0.006 |
| 100 % | | +30 | 836 500 003 | 5.0 | 0.000 001 | 0.006 |
| 100 % | | +40 | 836 500 004 | 5.7 | 0.000 001 | 0.007 |
| 100 % | | +50 | 836 500 004 | 5.4 | 0.000 001 | 0.006 |
| 115 % | | +20 | 836 500 004 | 6.1 | 0.000 001 | 0.007 |
| 85 % | | +20 | 836 500 002 | 4.2 | 0.000 001 | 0.005 |

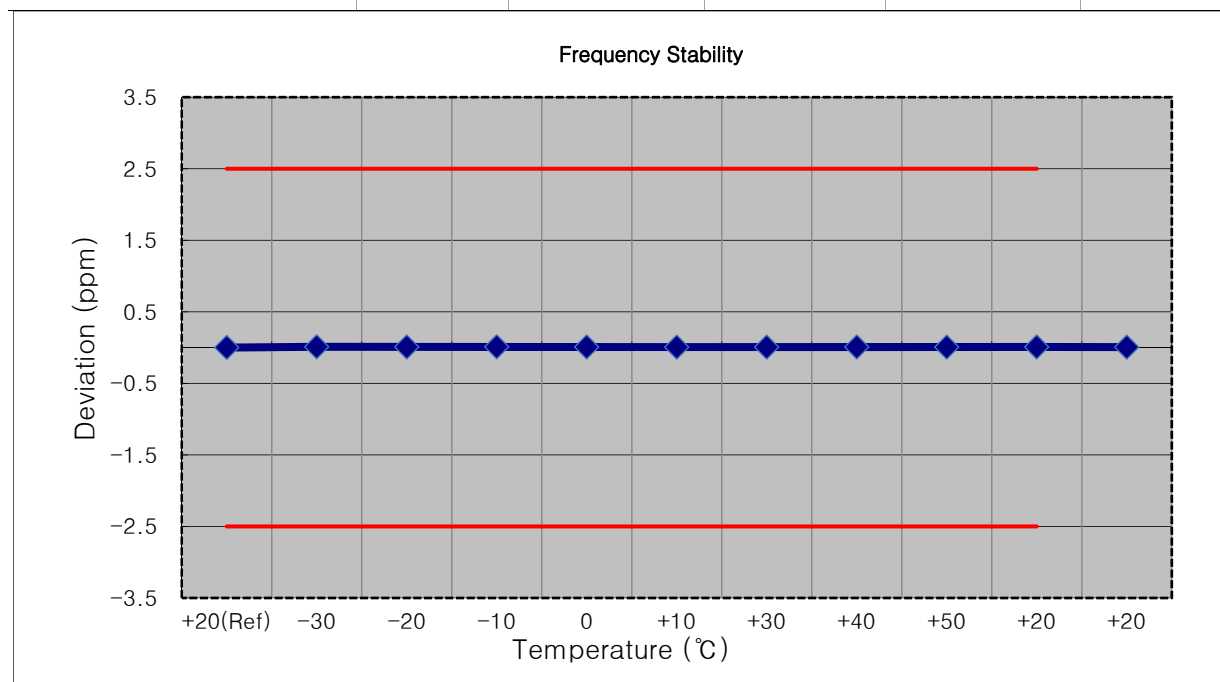


9. TEST PLOTS


BAND 26. Occupied Bandwidth Plot (1.4 M BW Ch.26915 QPSK_RB6_0)

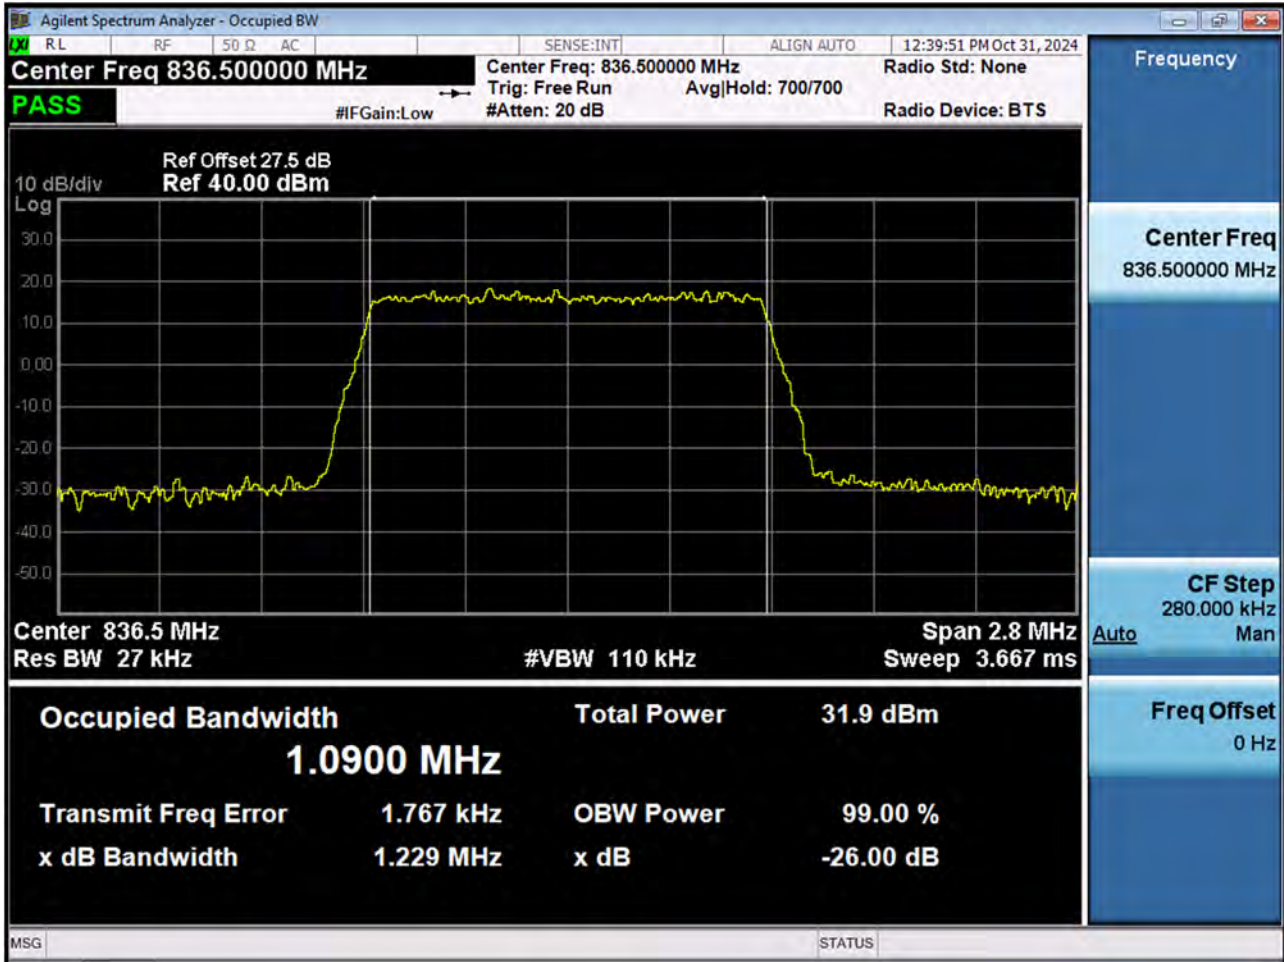


BAND 26. Occupied Bandwidth Plot (1.4 M BW Ch.26915 16QAM_RB6_0)

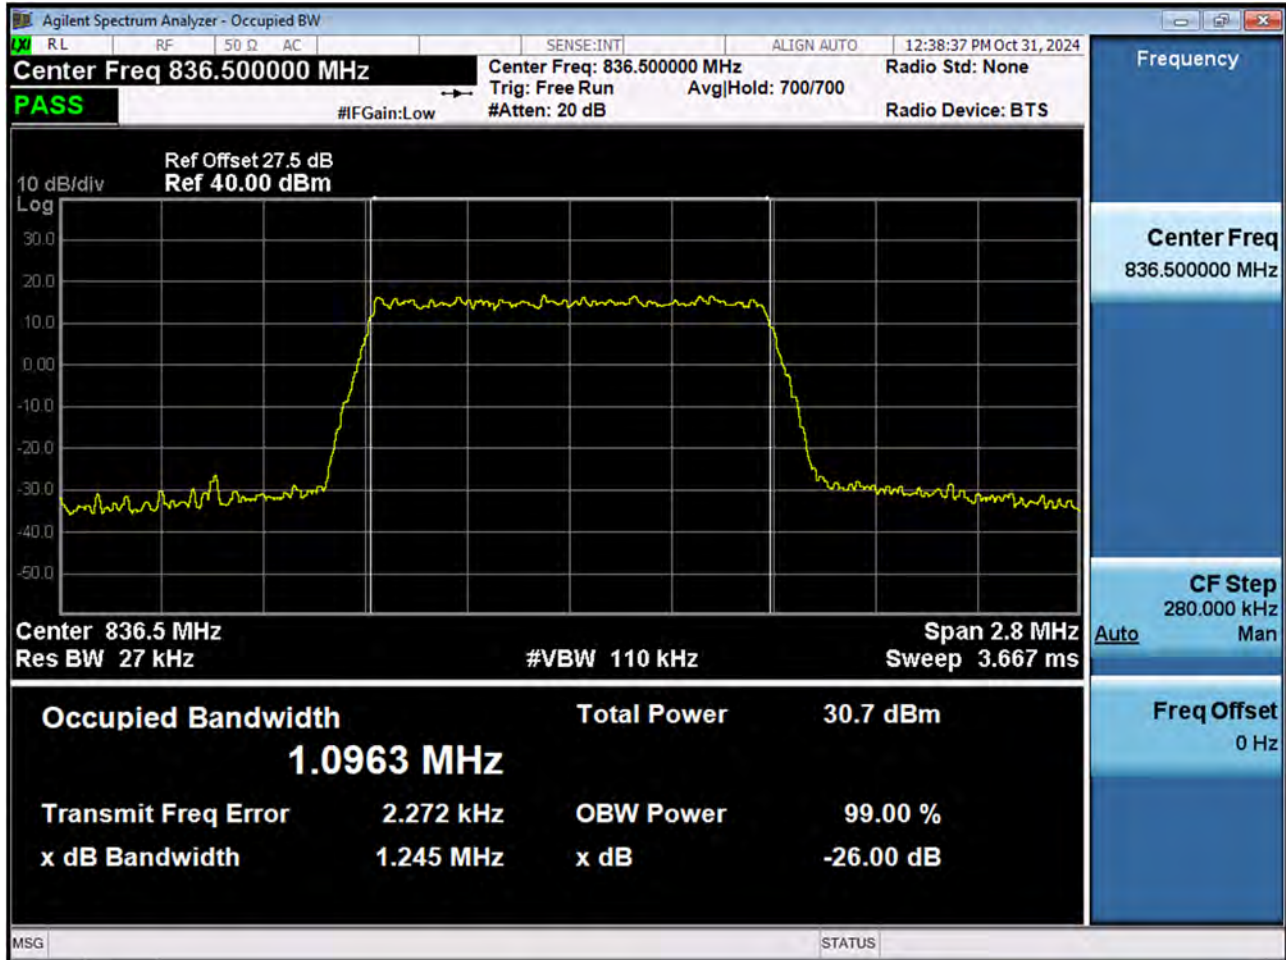


BAND 26. Occupied Bandwidth Plot (1.4 M BW Ch.26915 64QAM_RB6_0)

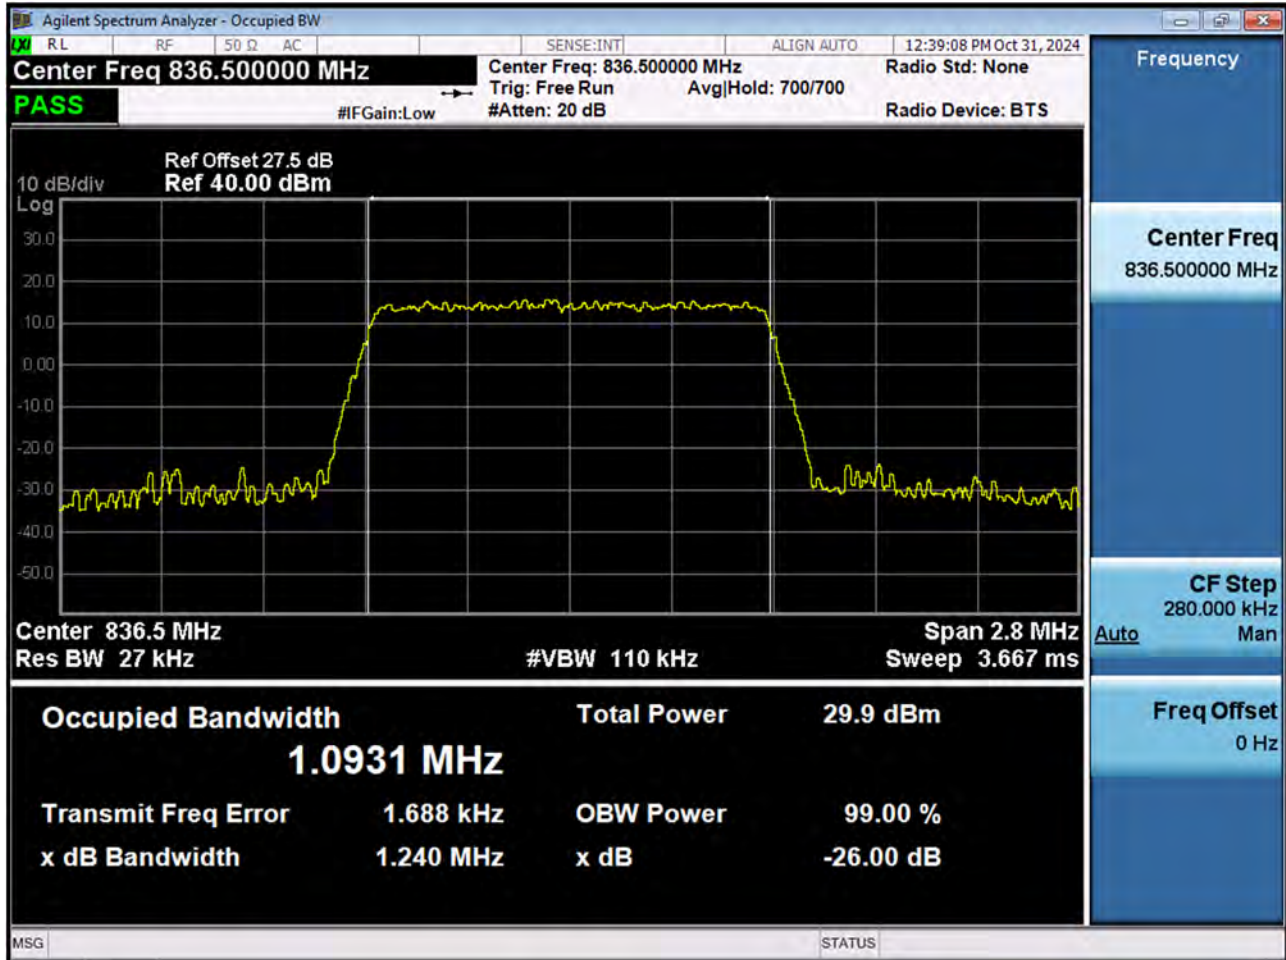


BAND 26. Occupied Bandwidth Plot (1.4 M BW Ch.26915 256QAM_RB6_0)

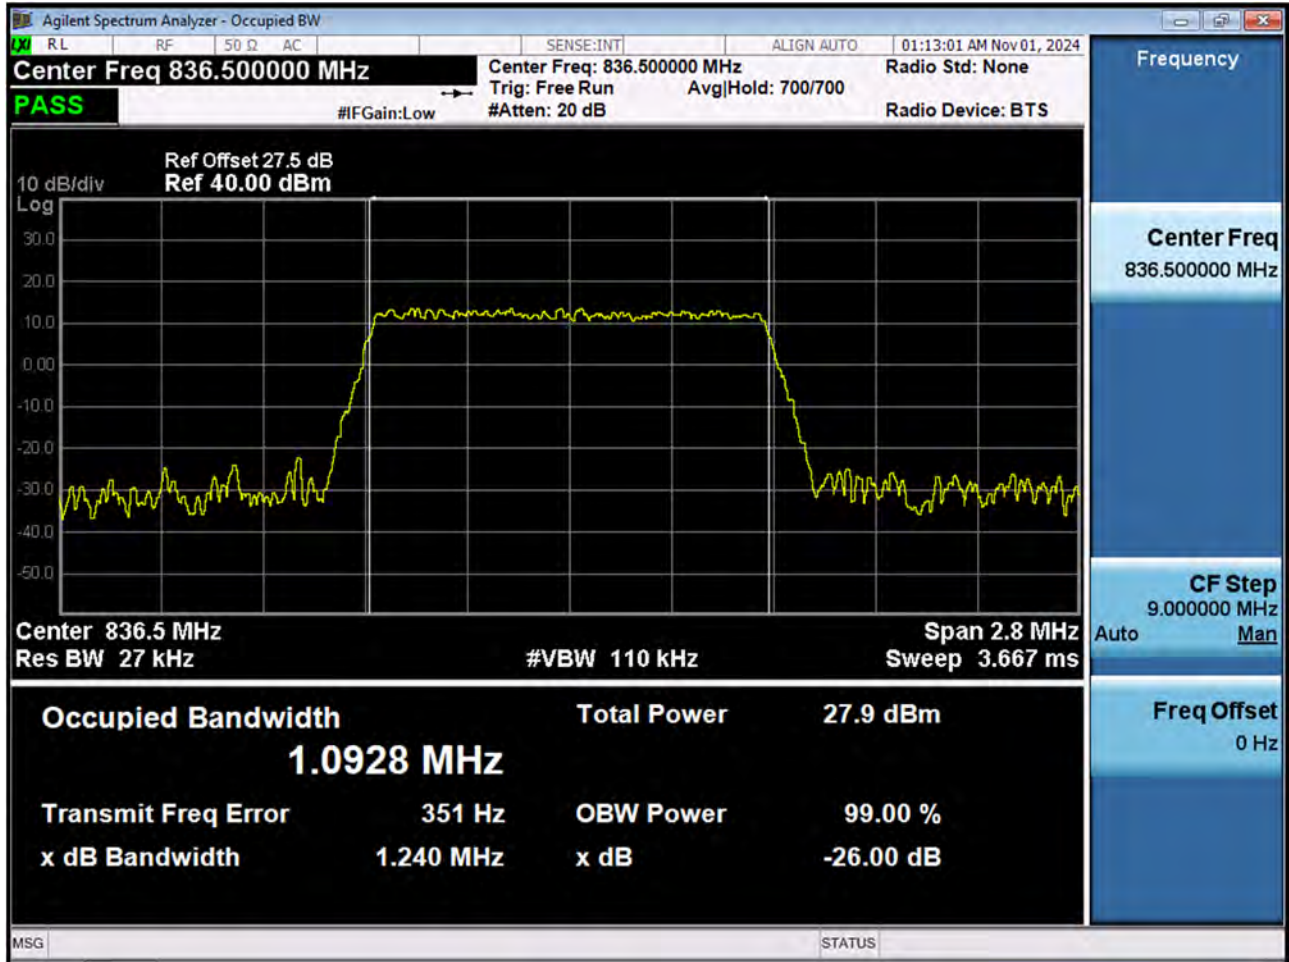


BAND 26. Occupied Bandwidth Plot (3 M BW Ch.26915 QPSK_RB15_0)

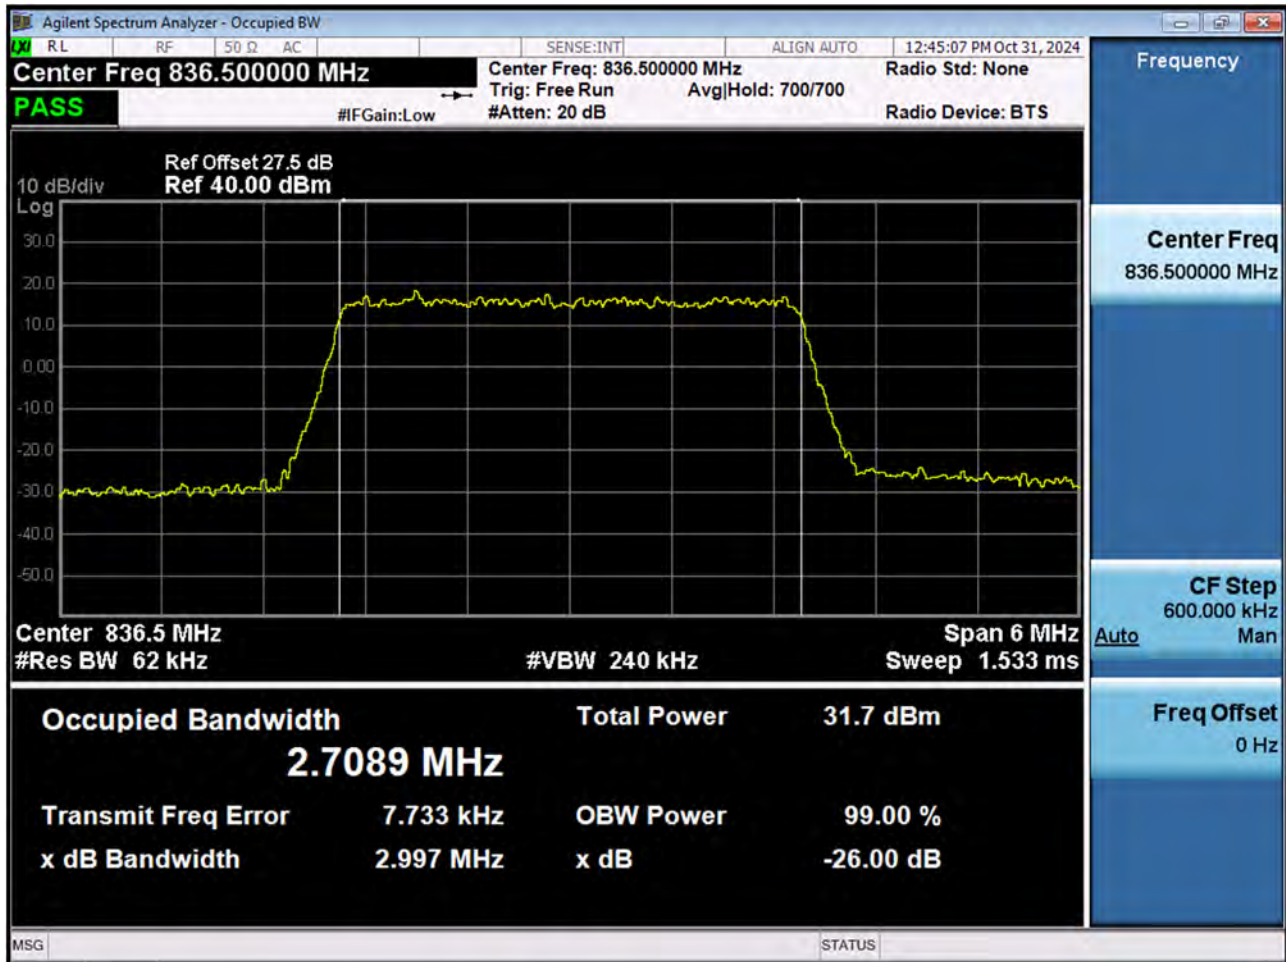


BAND 26. Occupied Bandwidth Plot (3 M BW Ch.26915 16QAM_RB15_0)

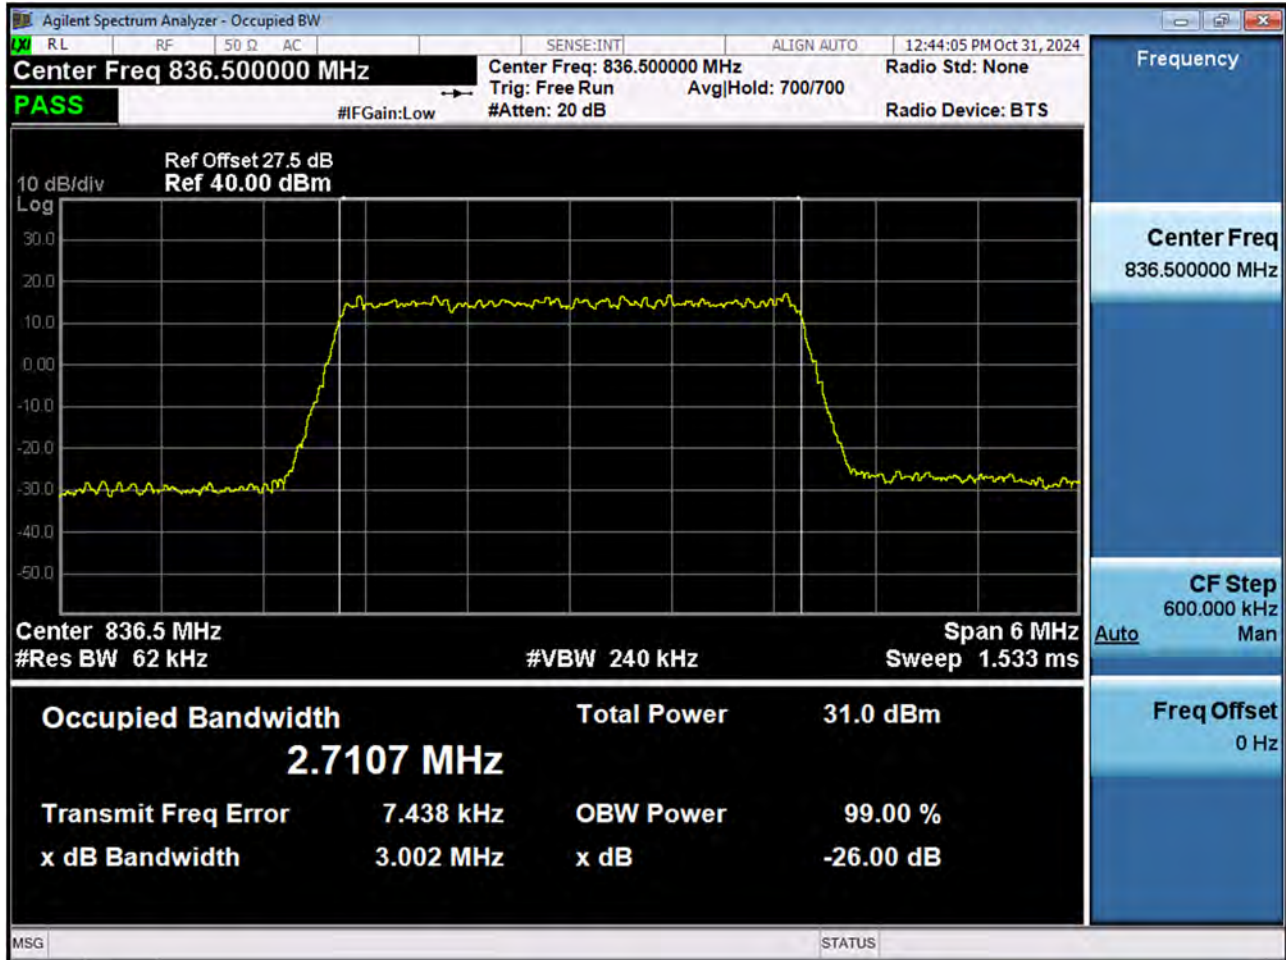


BAND 26. Occupied Bandwidth Plot (3 M BW Ch.26915 64QAM_RB15_0)

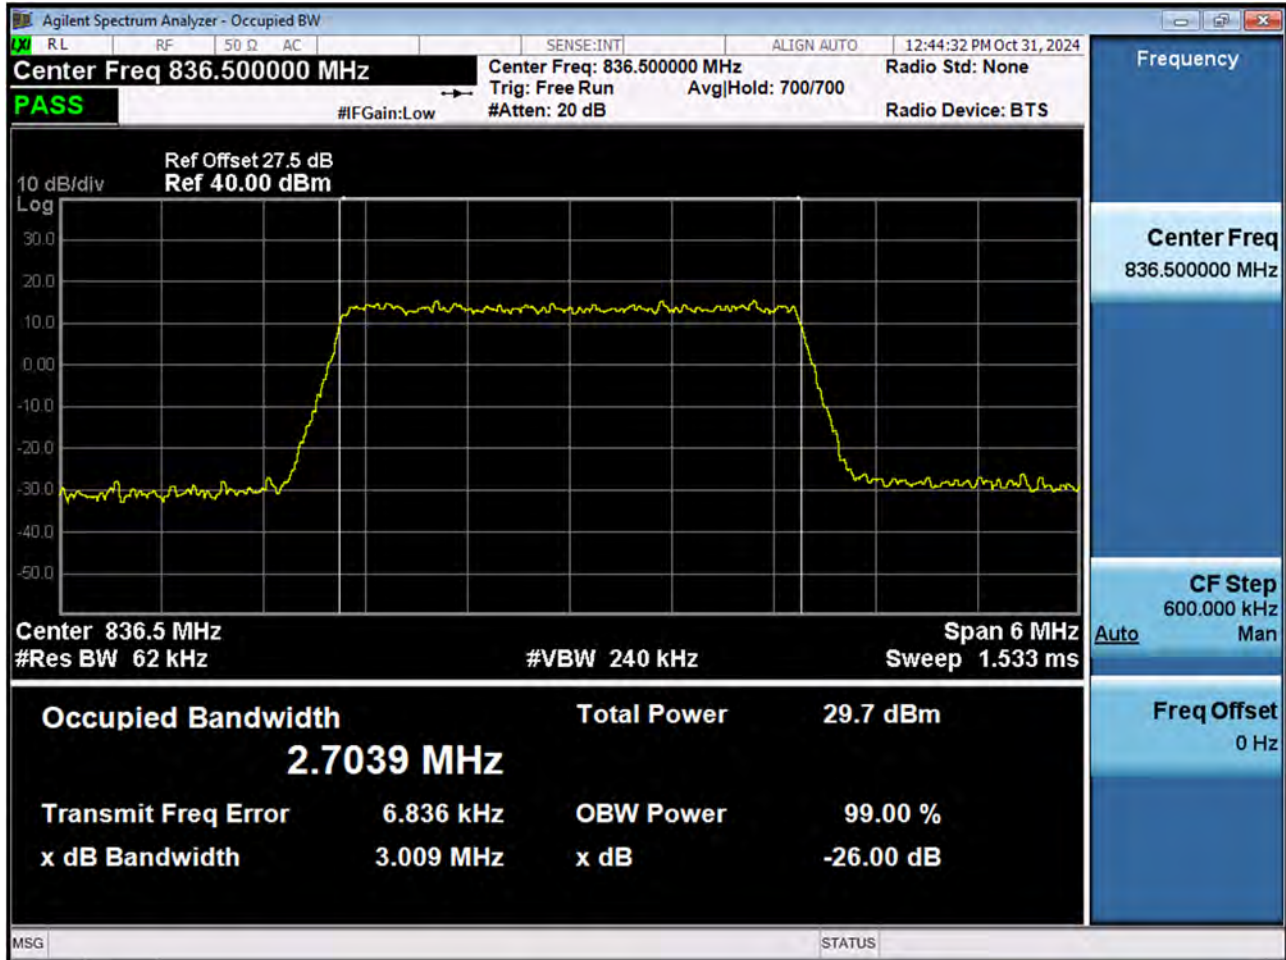


BAND 26. Occupied Bandwidth Plot (3 M BW Ch.26915 256QAM_RB15_0)

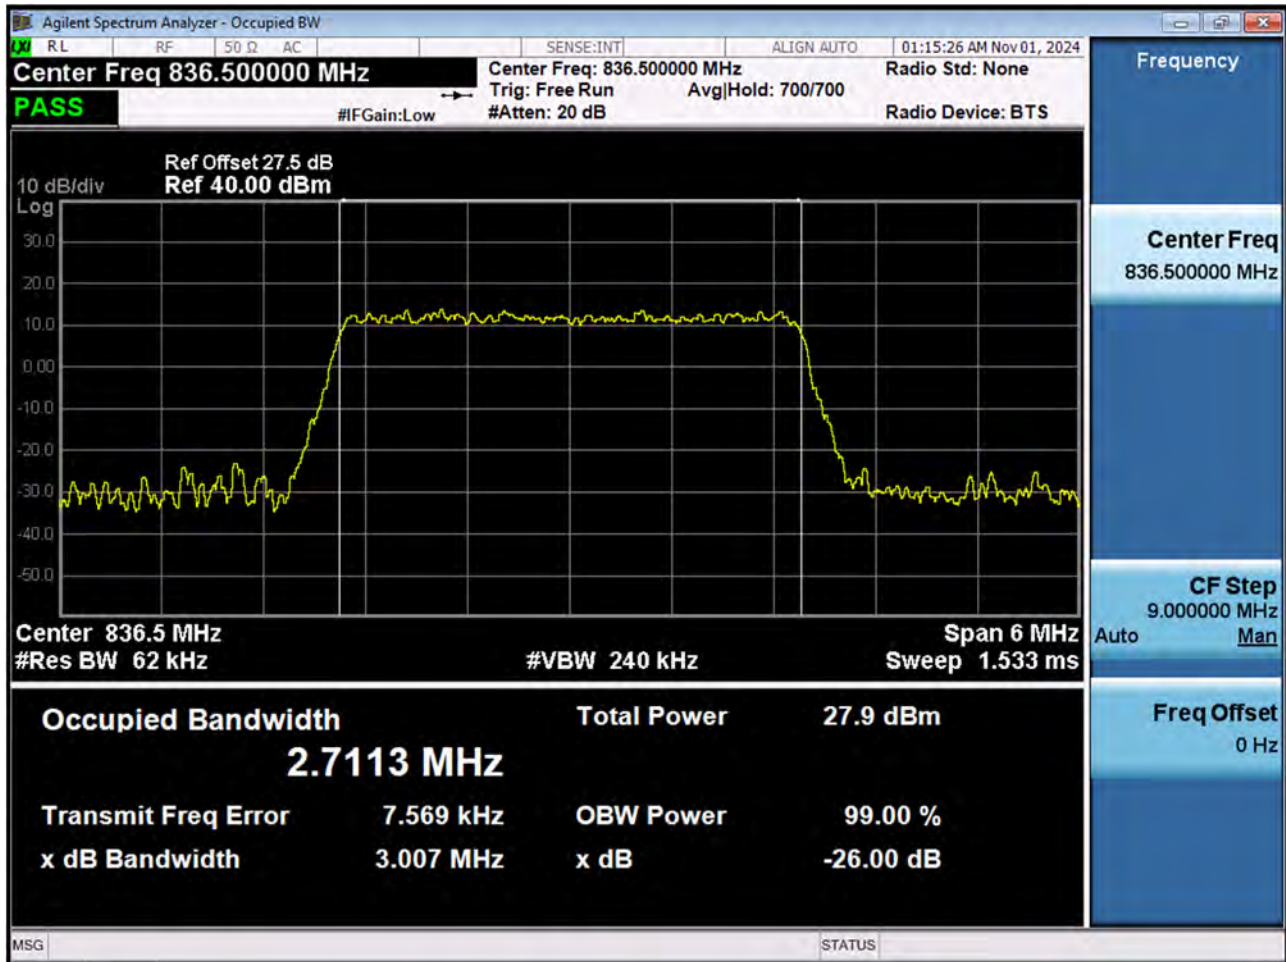


BAND 26. Occupied Bandwidth Plot (5 M BW Ch.26915 QPSK_RB25_0)

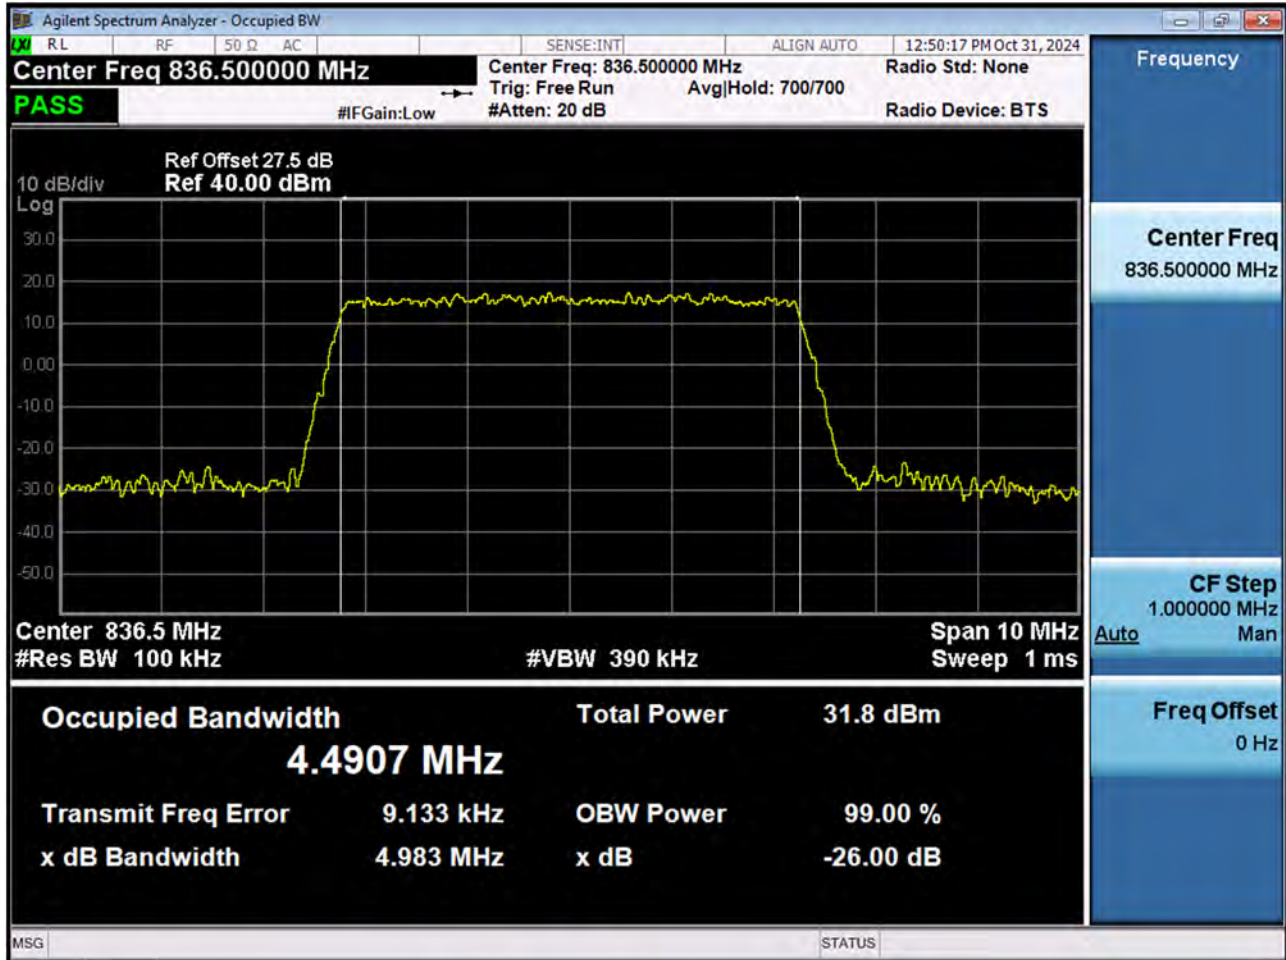


BAND 26. Occupied Bandwidth Plot (5 M BW Ch.26915 16QAM_RB25_0)

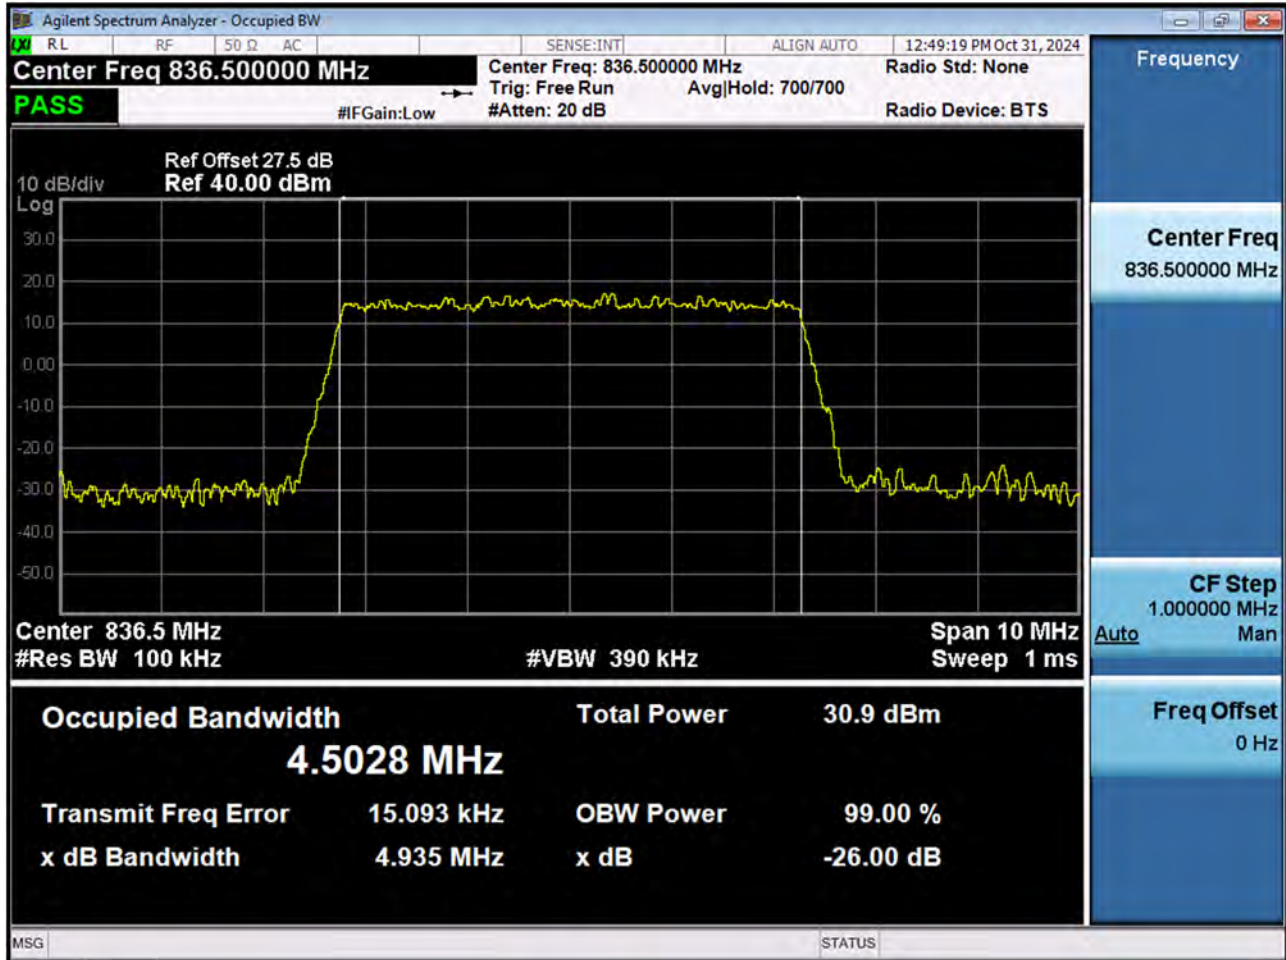


BAND 26. Occupied Bandwidth Plot (5 M BW Ch.26915 64QAM_RB25_0)

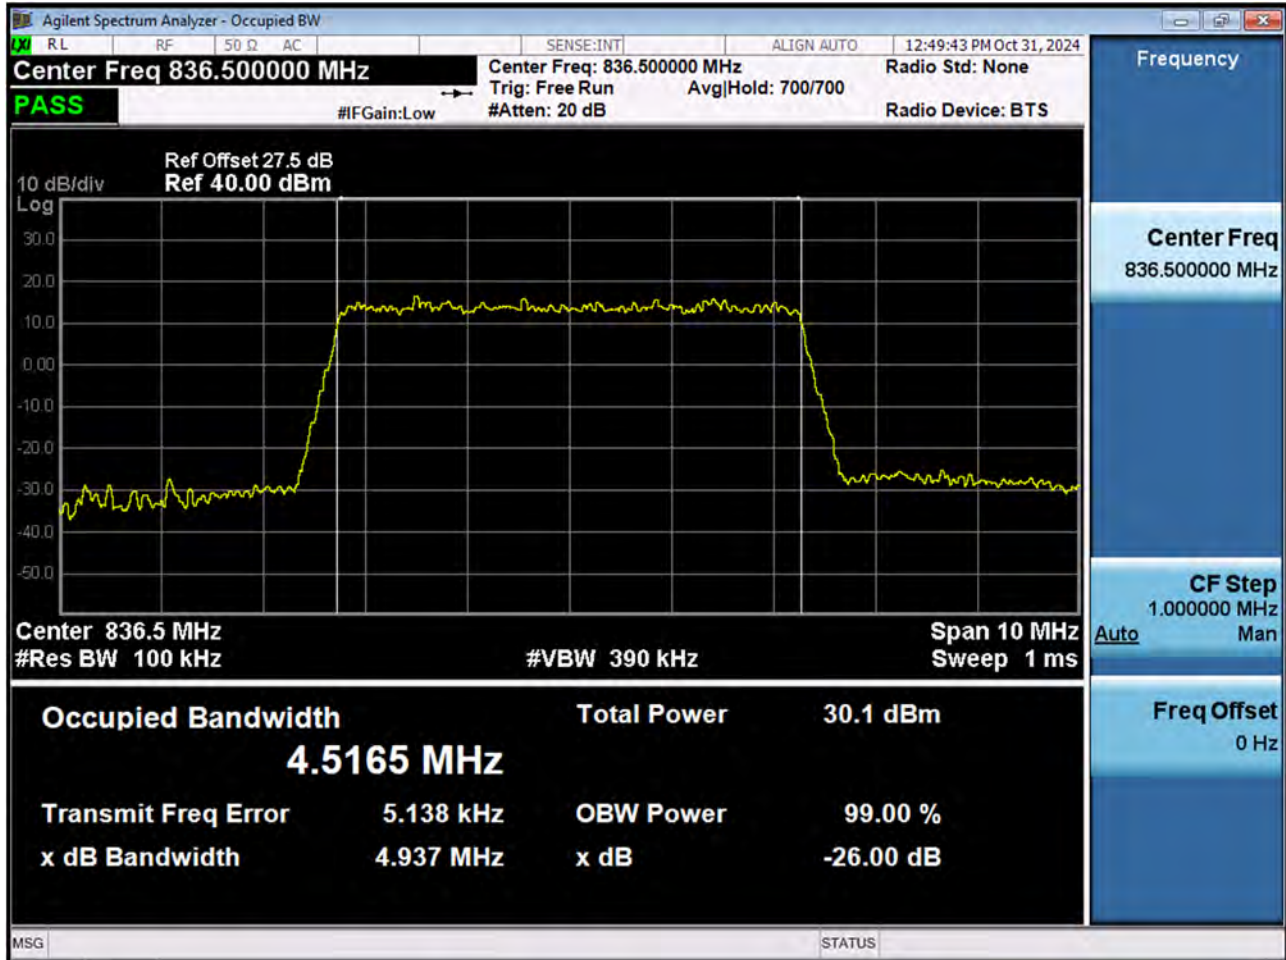


BAND 26. Occupied Bandwidth Plot (5 M BW Ch.26915 256QAM_RB25_0)

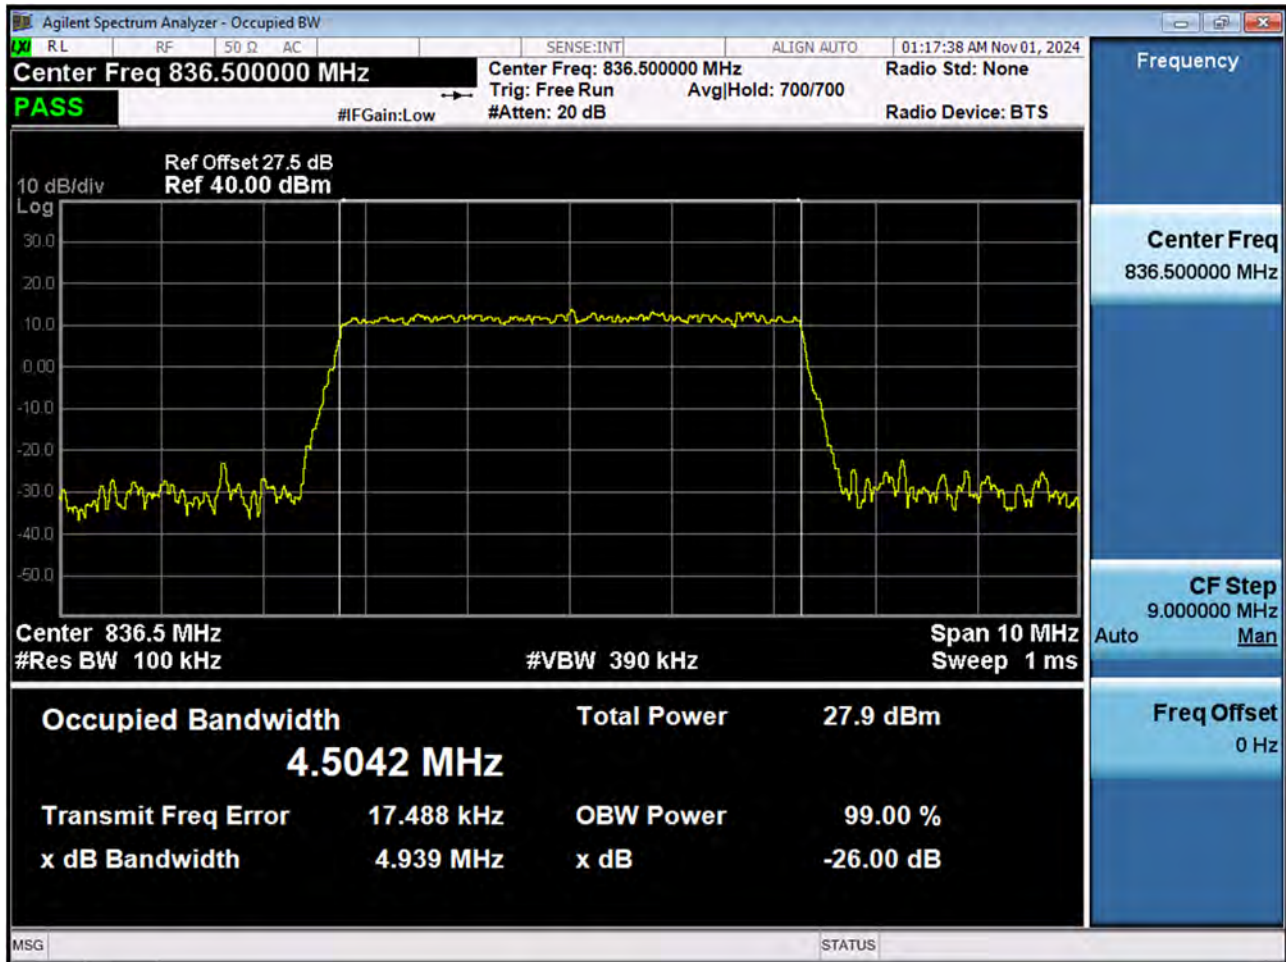


BAND 26. Occupied Bandwidth Plot (10 M BW Ch.26915 QPSK_RB50_0)

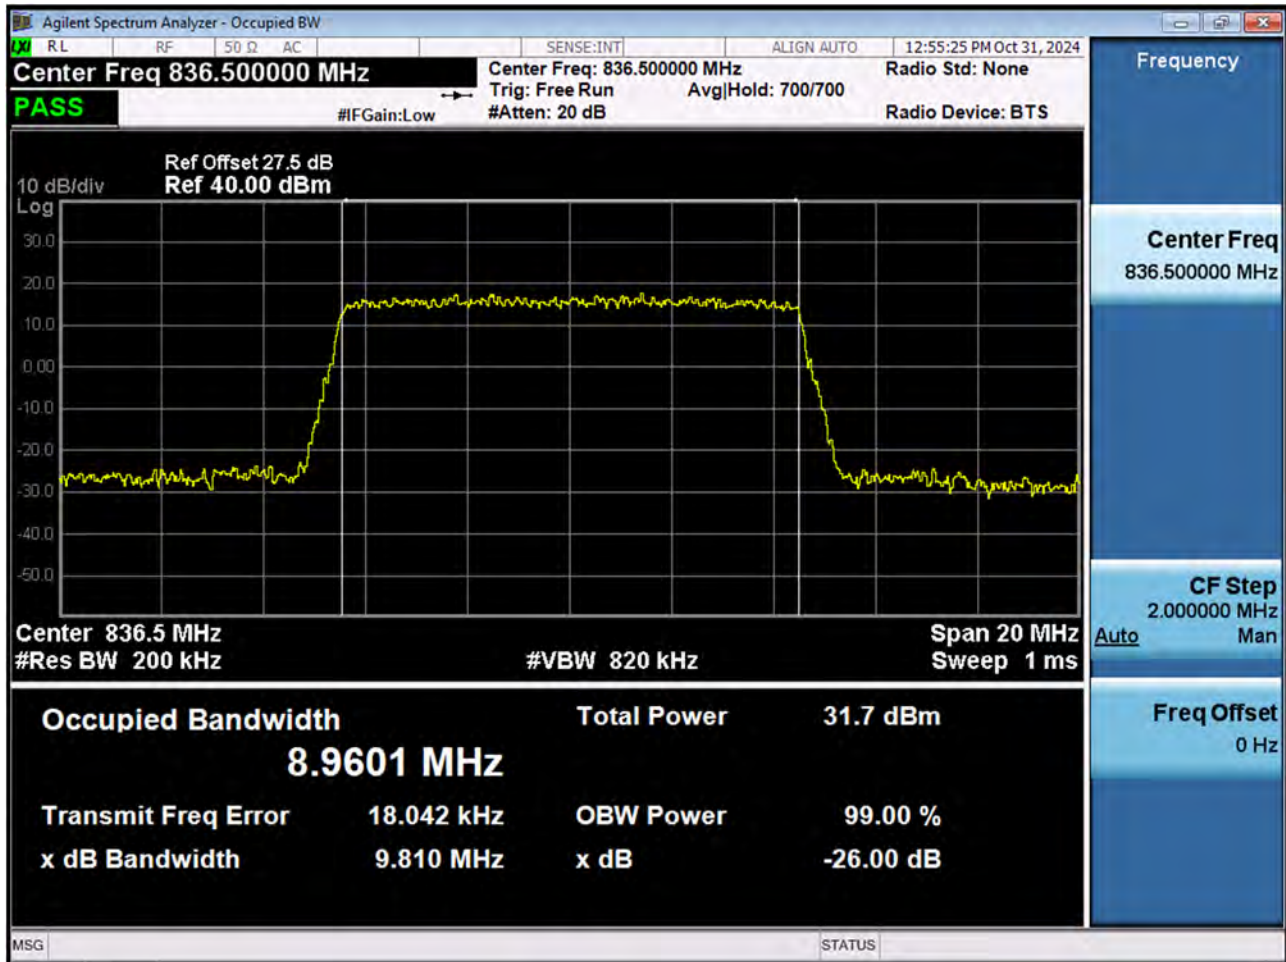


BAND 26. Occupied Bandwidth Plot (10 M BW Ch.26915 16QAM_RB50_0)

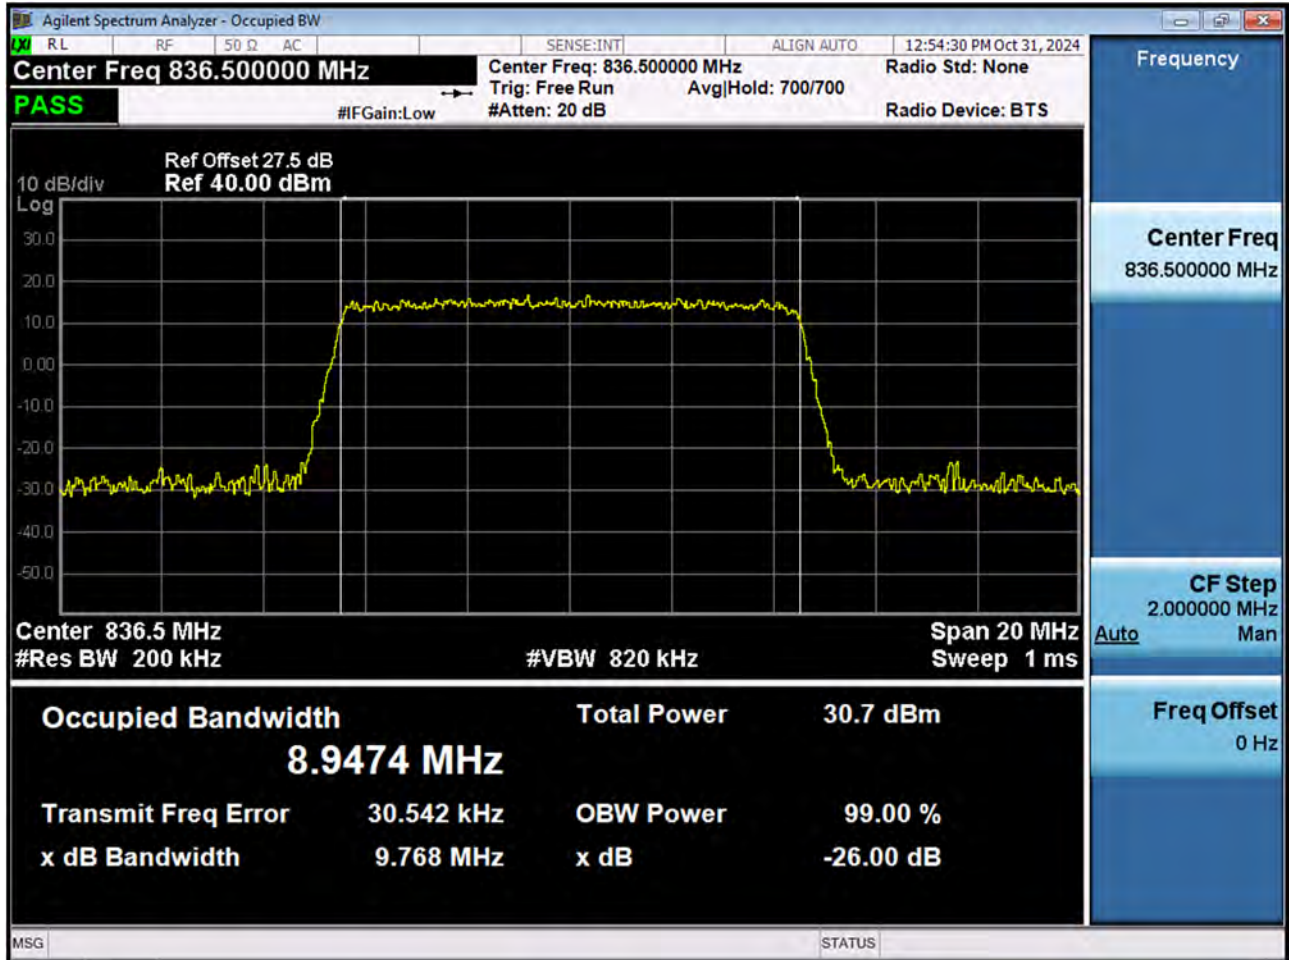


BAND 26. Occupied Bandwidth Plot (10 M BW Ch.26915 64QAM_RB50_0)

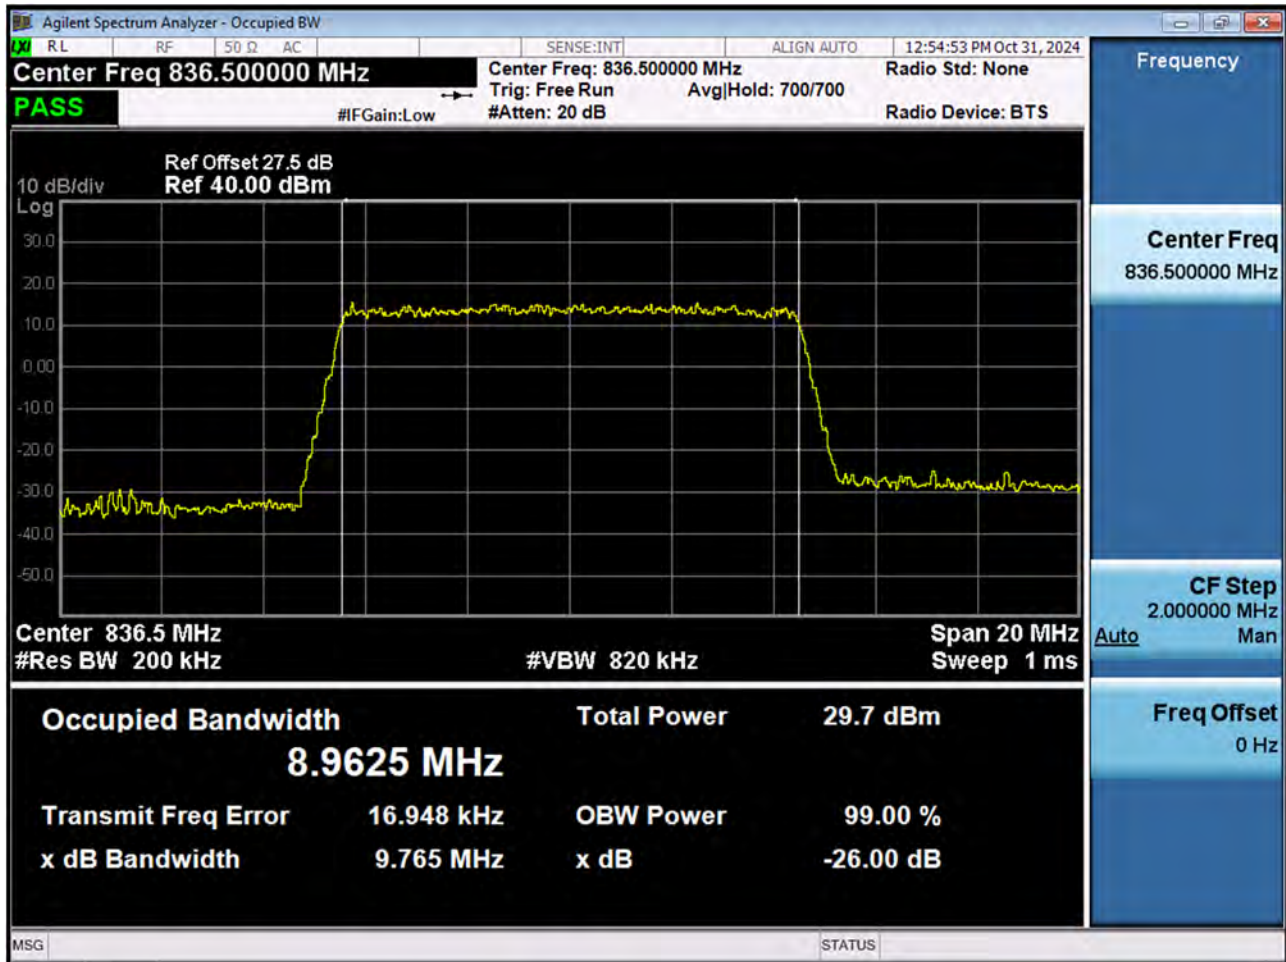


BAND 26. Occupied Bandwidth Plot (10 M BW Ch.26915 256QAM_RB50_0)

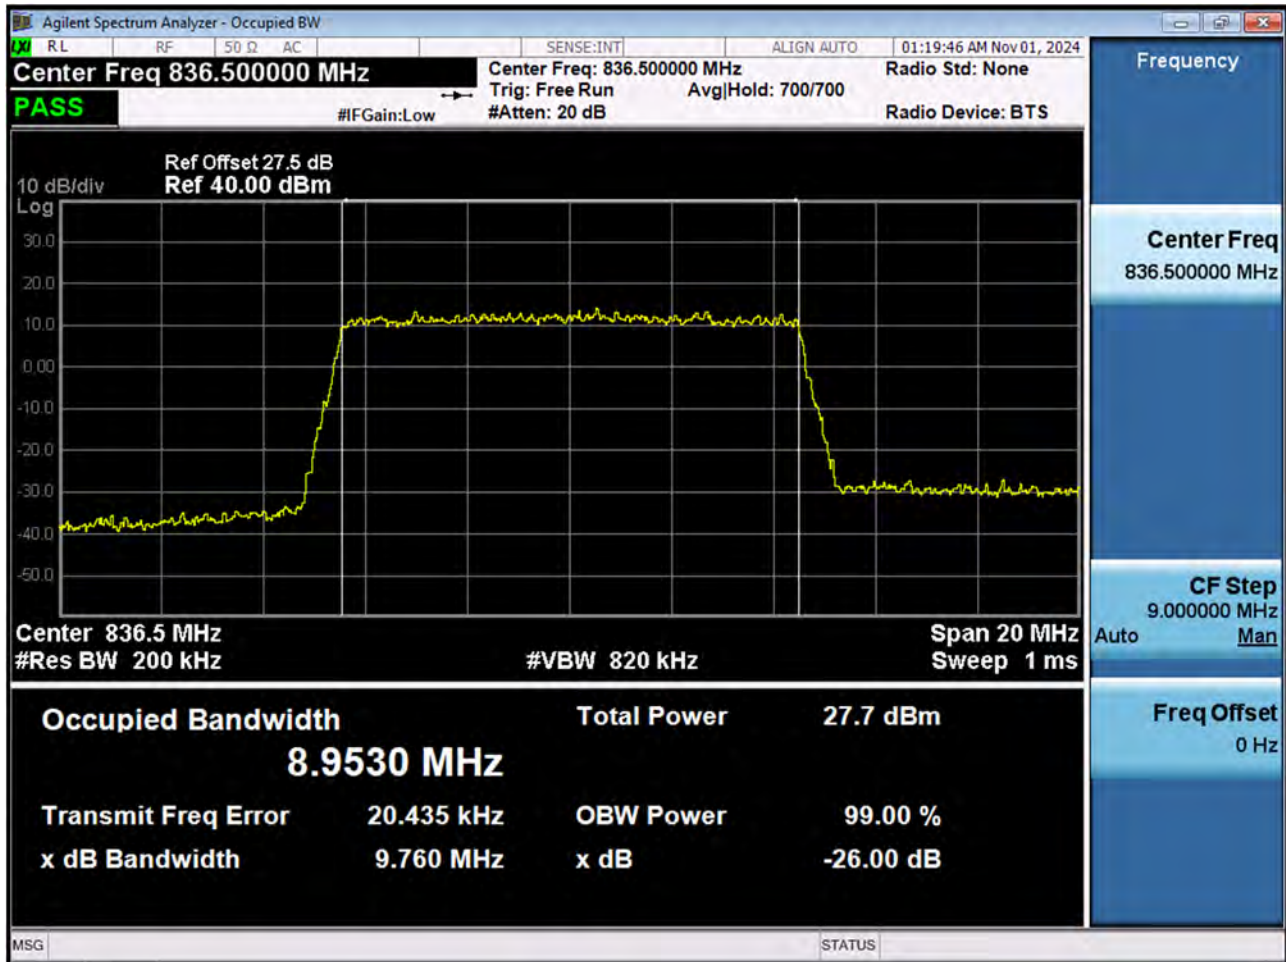


BAND 26. Occupied Bandwidth Plot (15 M BW Ch.26915 QPSK RB 75_0)

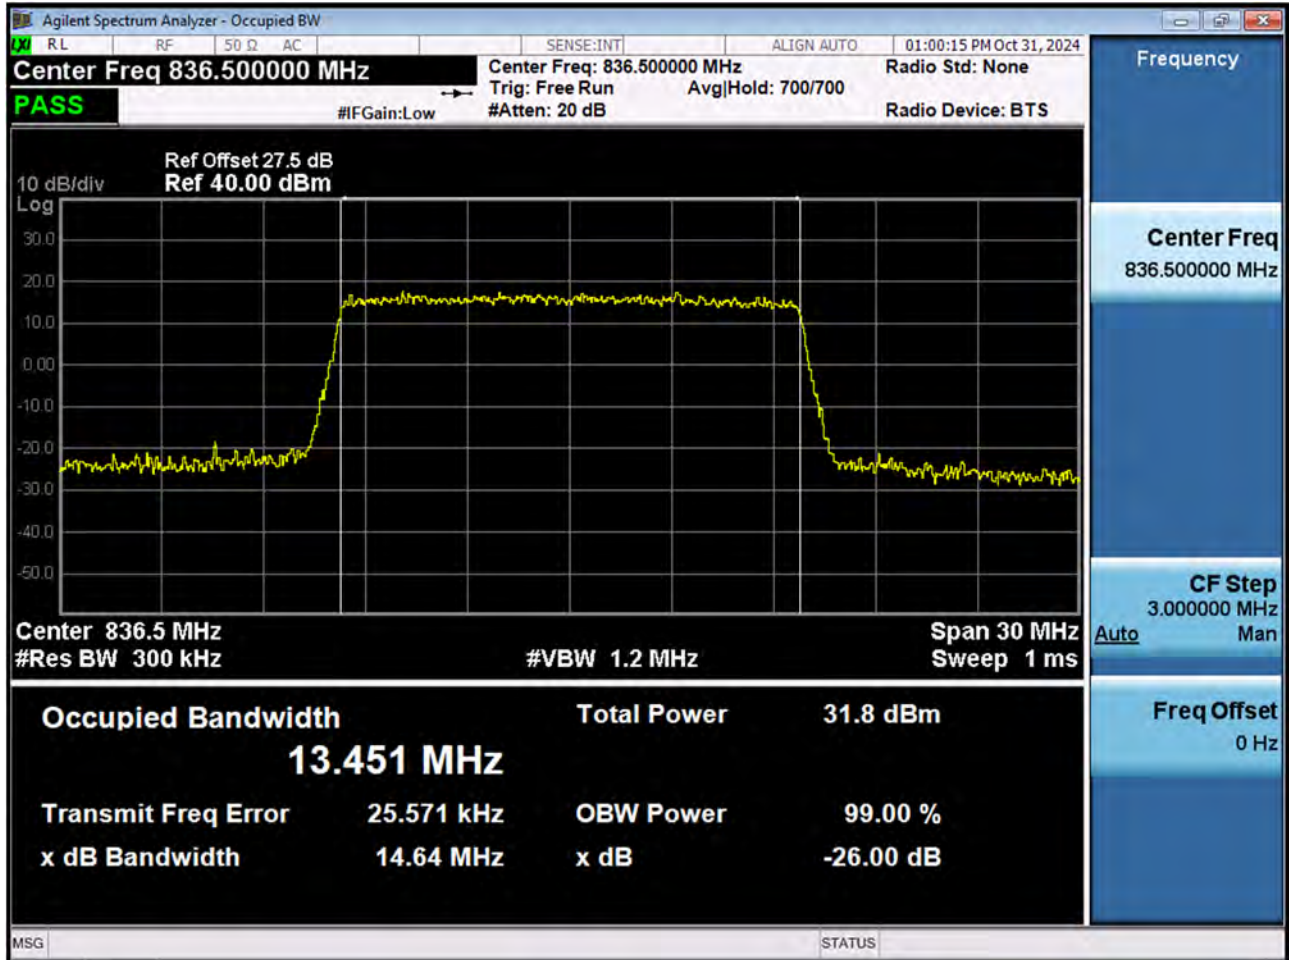


BAND 26. Occupied Bandwidth Plot (15 M BW Ch.26915 16QAM RB 75_0)

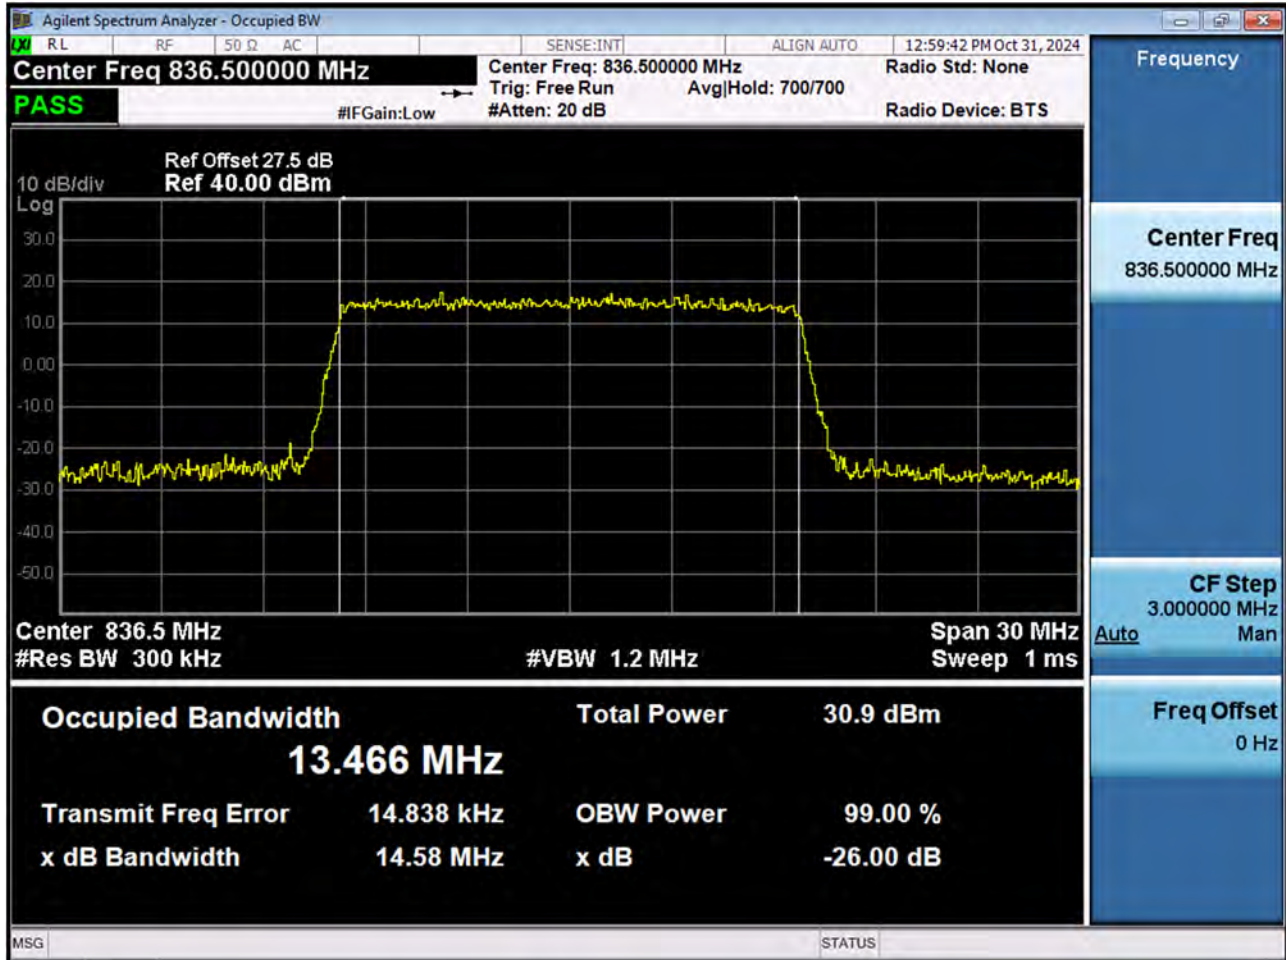


BAND 26. Occupied Bandwidth Plot (15 M BW Ch.26915 64QAM RB 75_0)

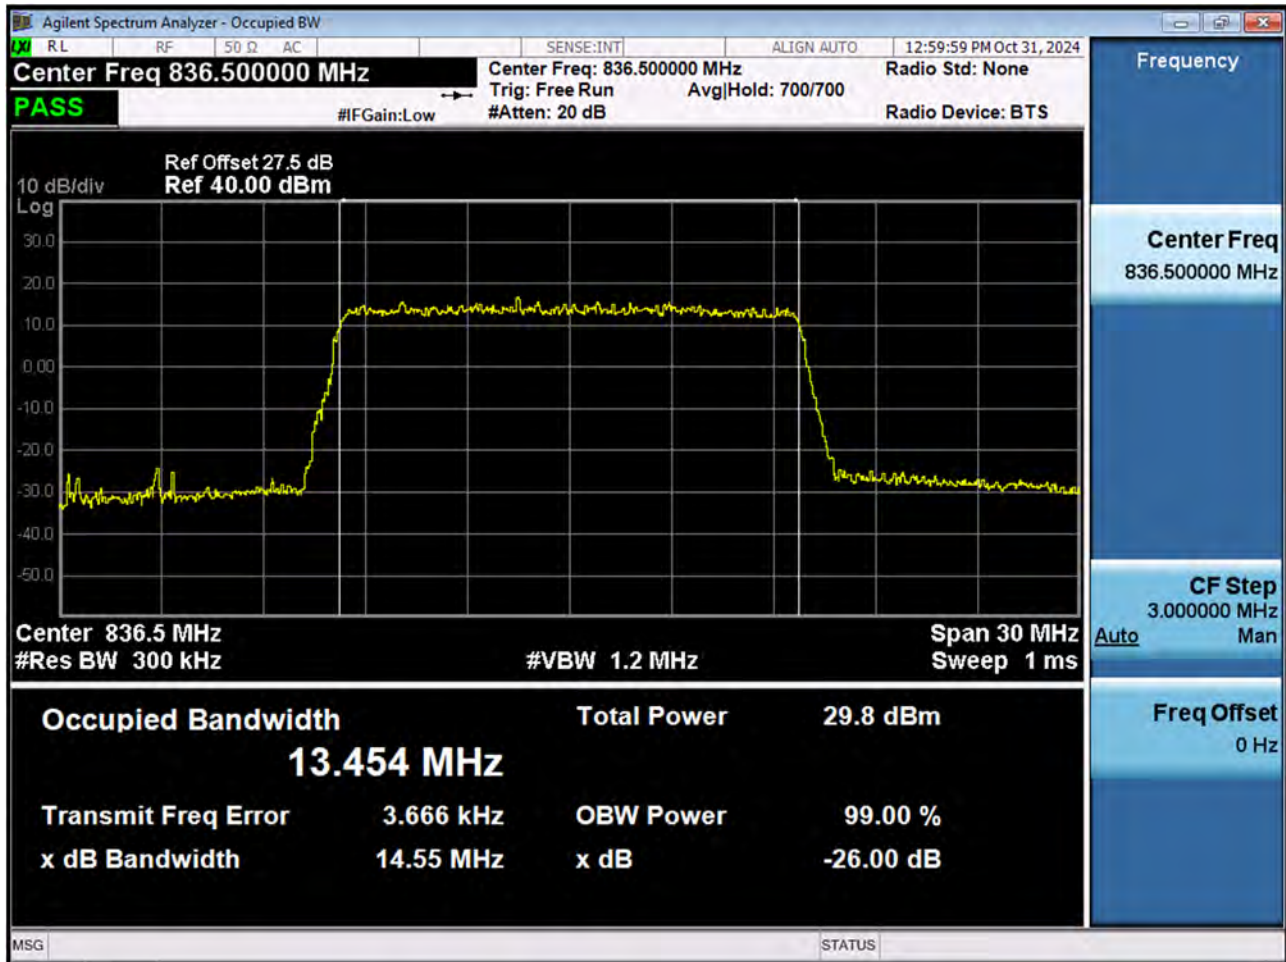


BAND 26. Occupied Bandwidth Plot (15 M BW Ch.26915 256QAM RB 75_0)

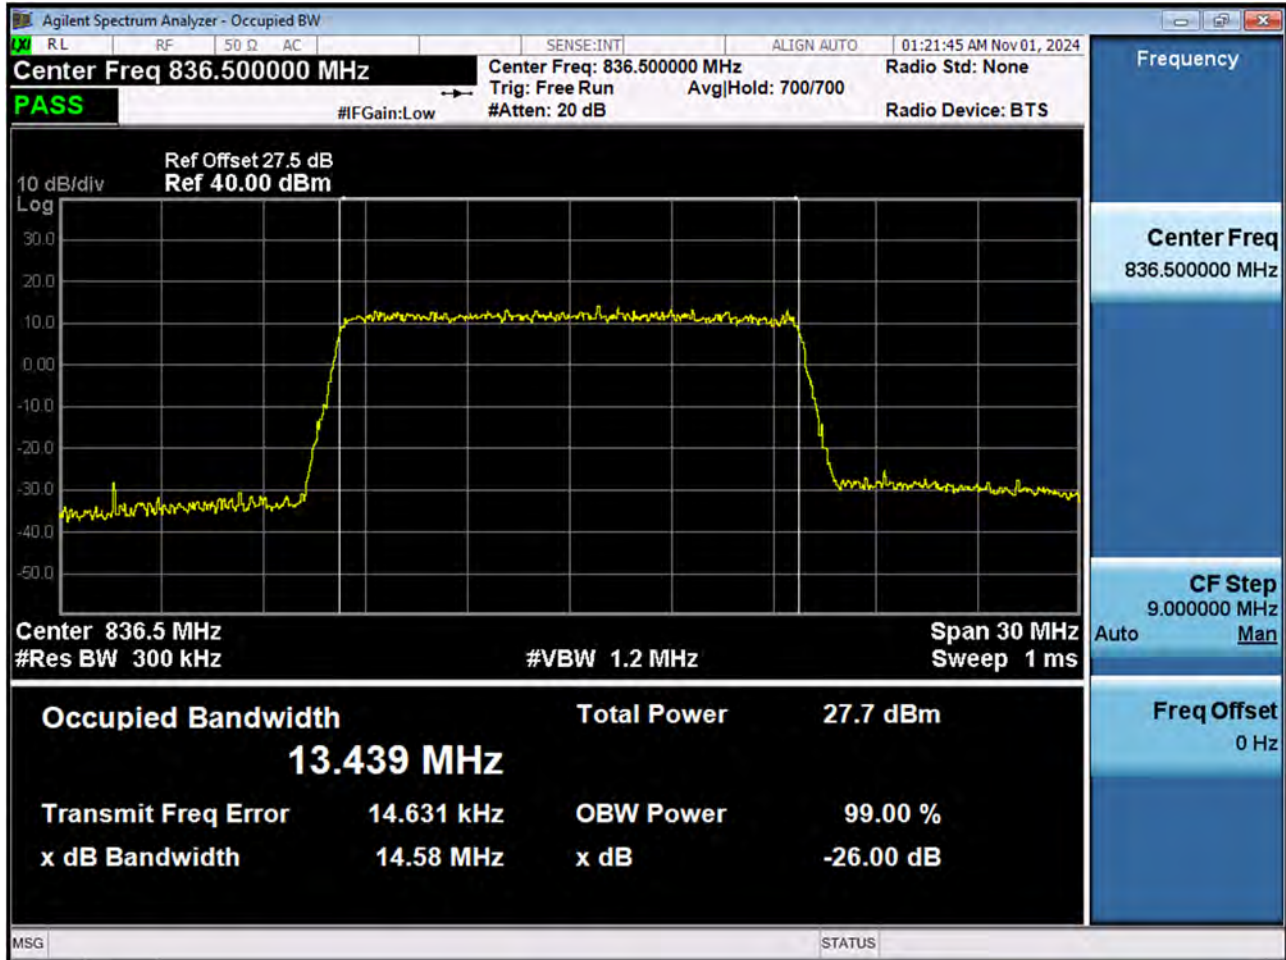


BAND 26. PAR Plot (1.4 M BW Ch.26915 QPSK_RB6_0)

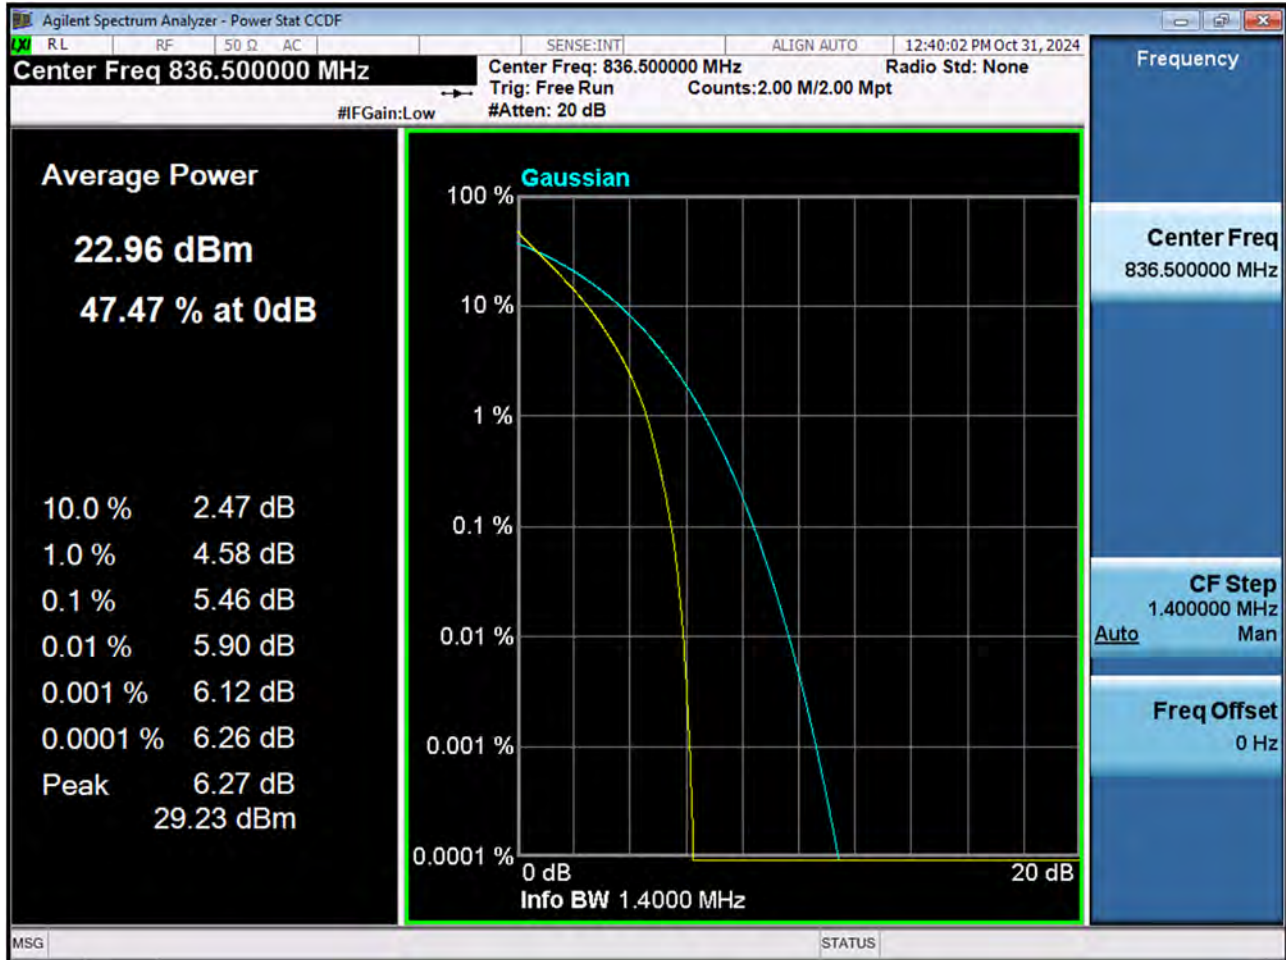


BAND 26. PAR Plot (1.4 M BW Ch.26915 16QAM_RB6_0)

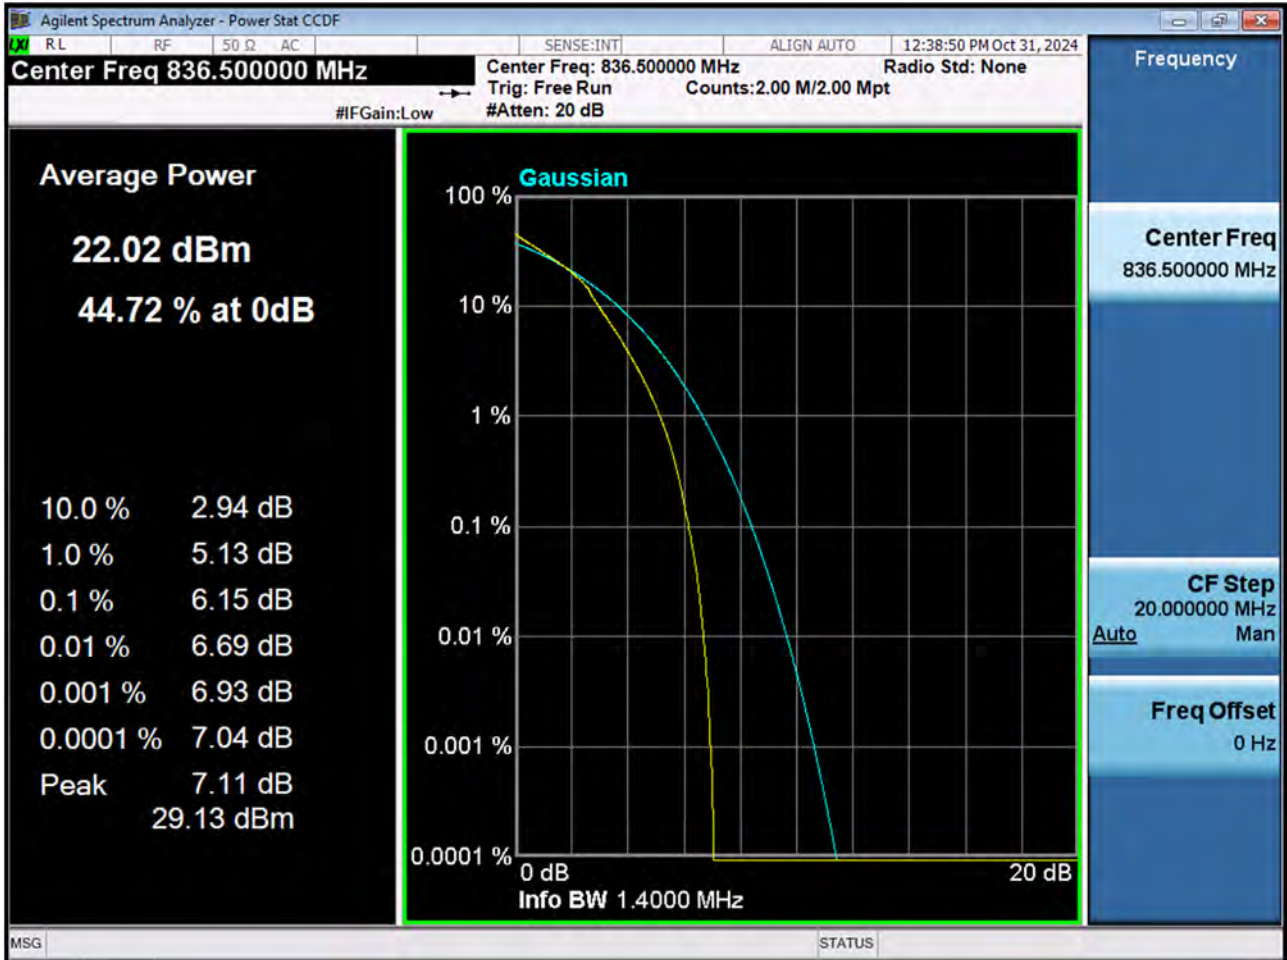


BAND 26. PAR Plot (1.4 M BW Ch.26915 64QAM_RB6_0)

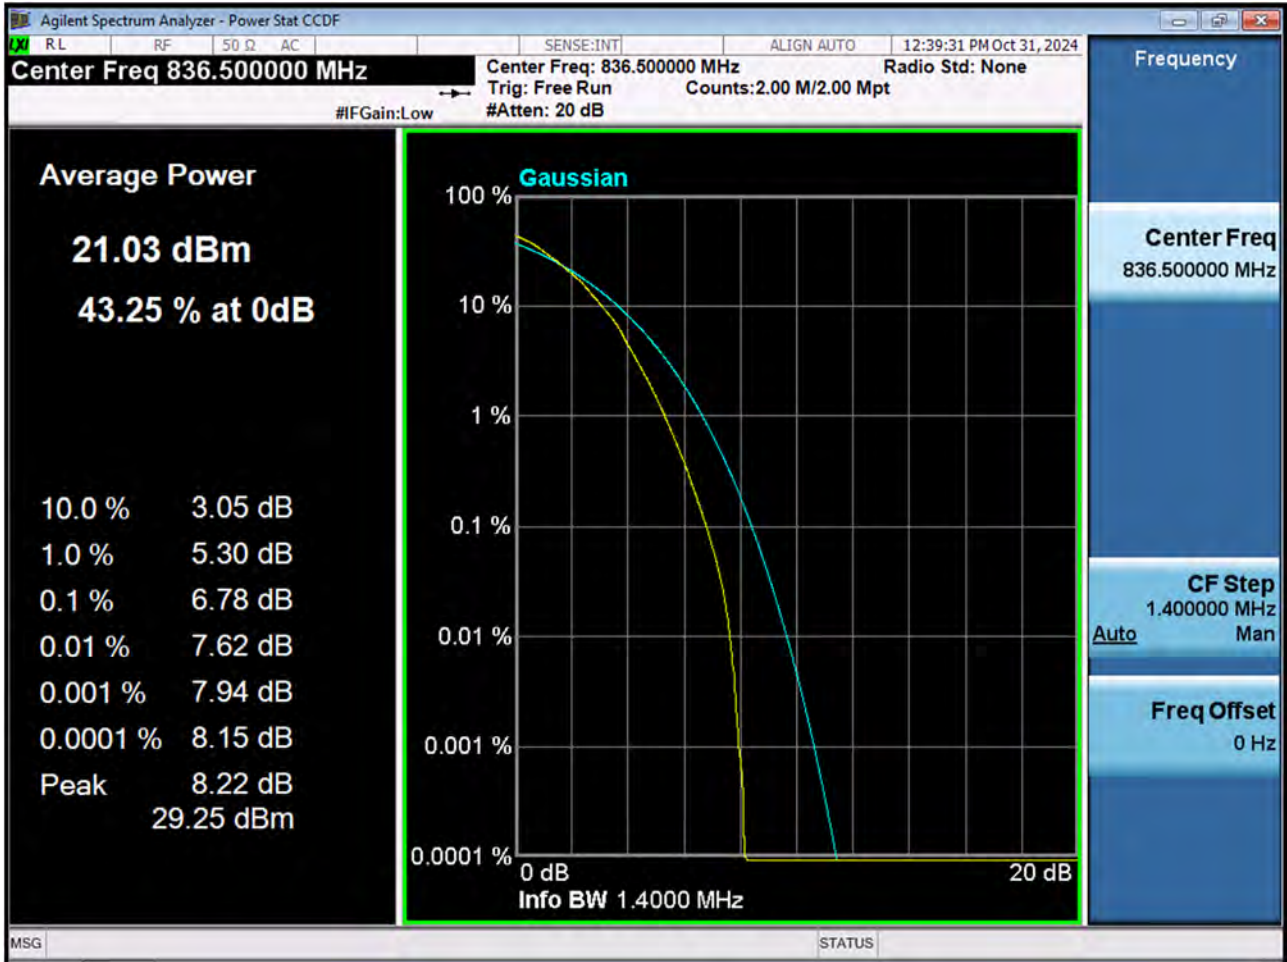


BAND 26. PAR Plot (1.4 M BW Ch.26915 256QAM_RB6_0)

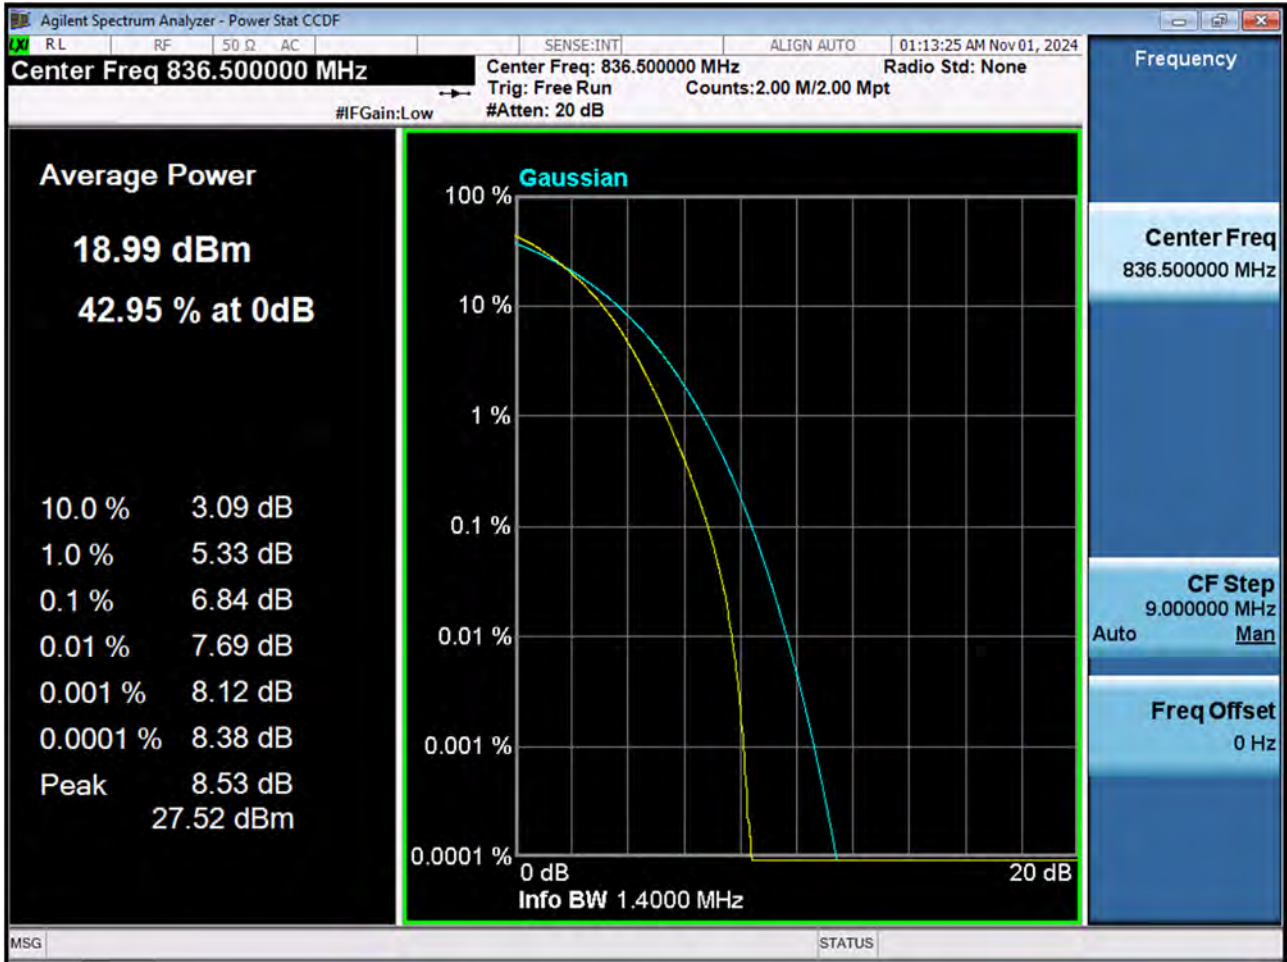


BAND 26. PAR Plot (3 M BW Ch.26915 QPSK_RB15_0)

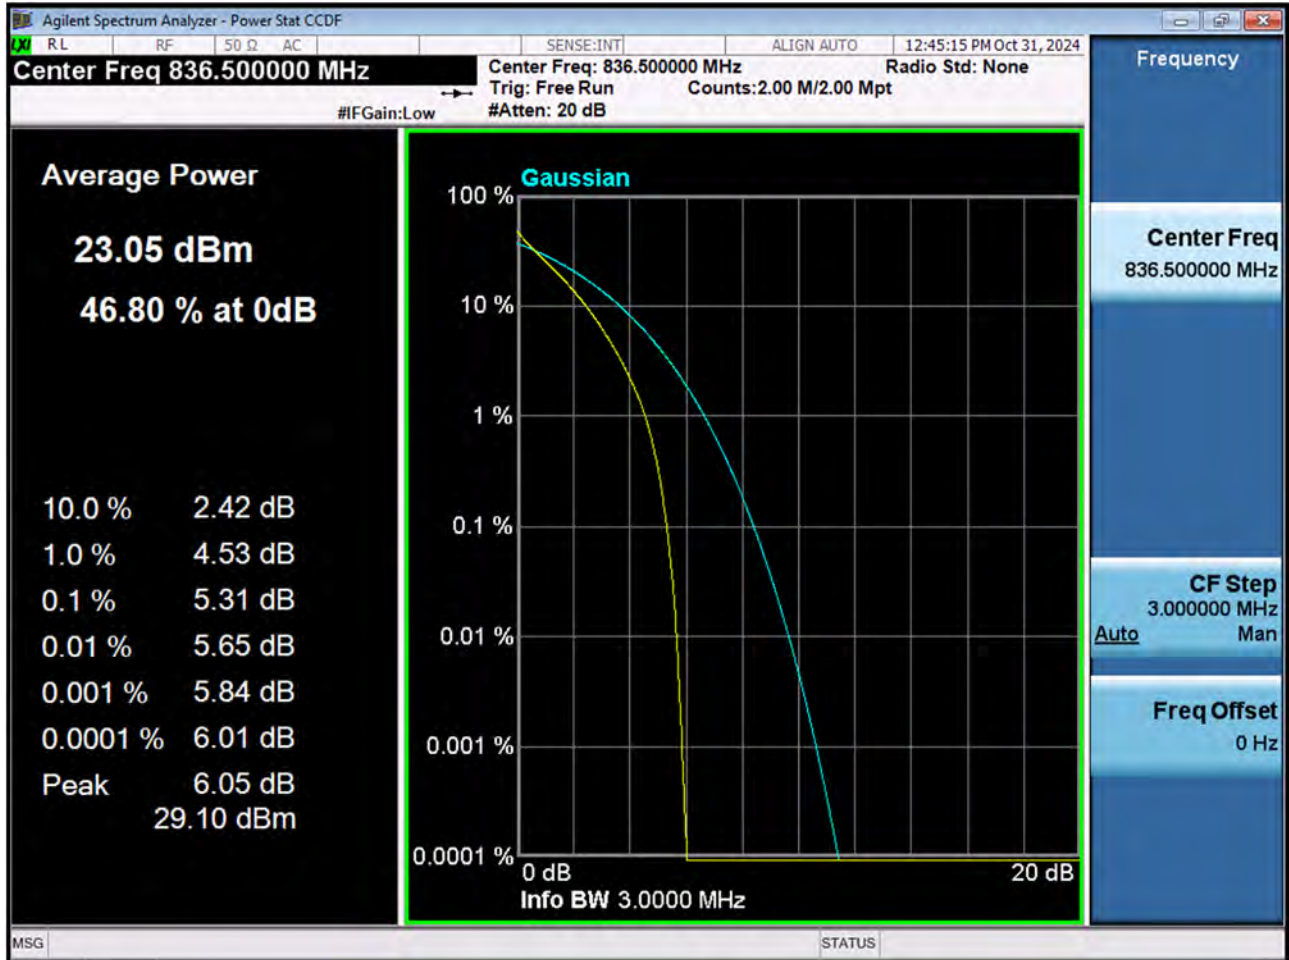


BAND 26 PAR Plot (3 M BW Ch.26915 16QAM_RB15_0)

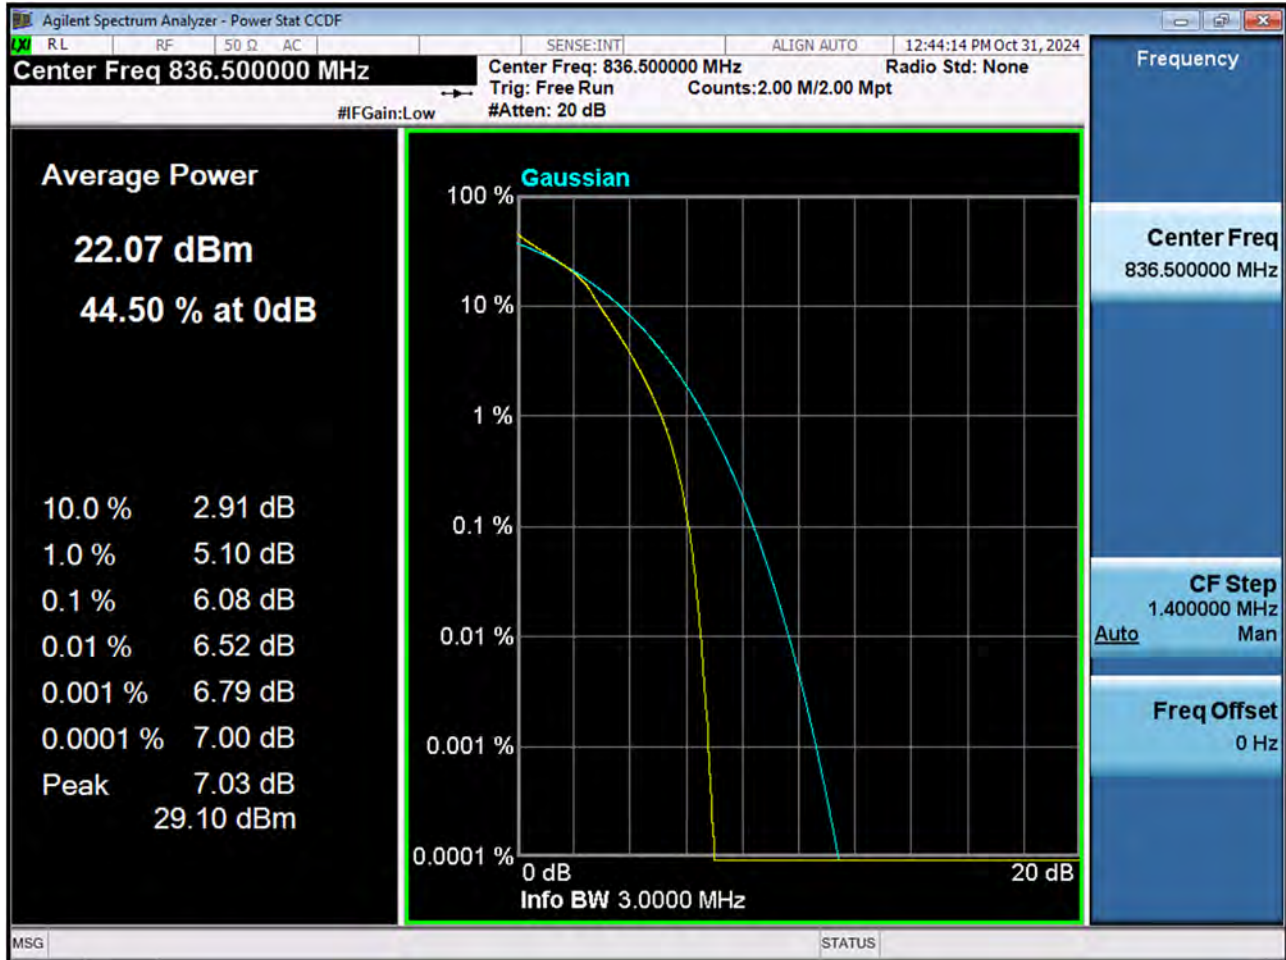


BAND 26. PAR Plot (3 M BW Ch.26915 64QAM_RB15_0)

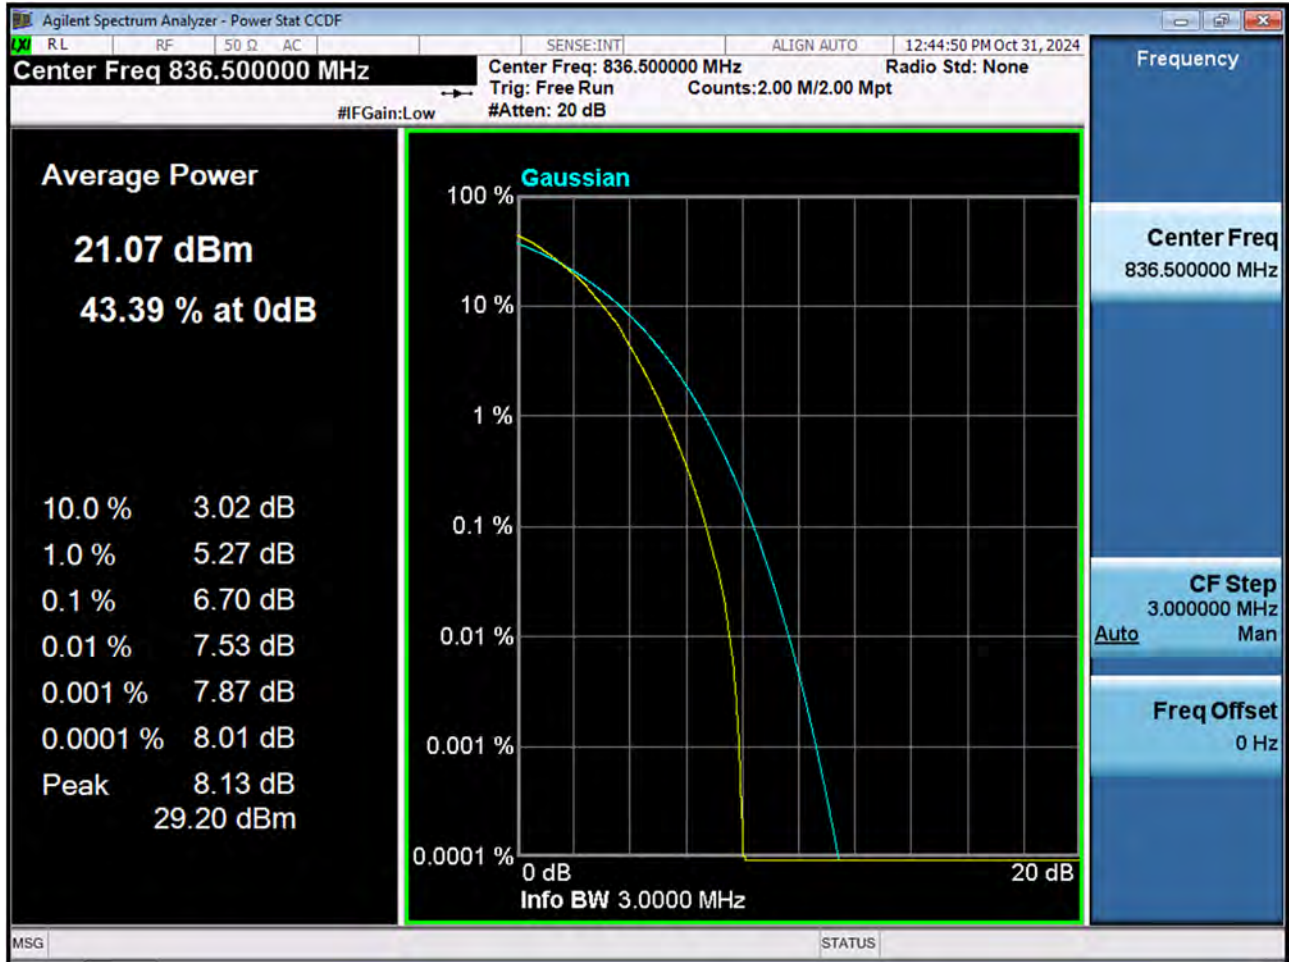


BAND 26. PAR Plot (3 M BW Ch.26915 256QAM_RB15_0)

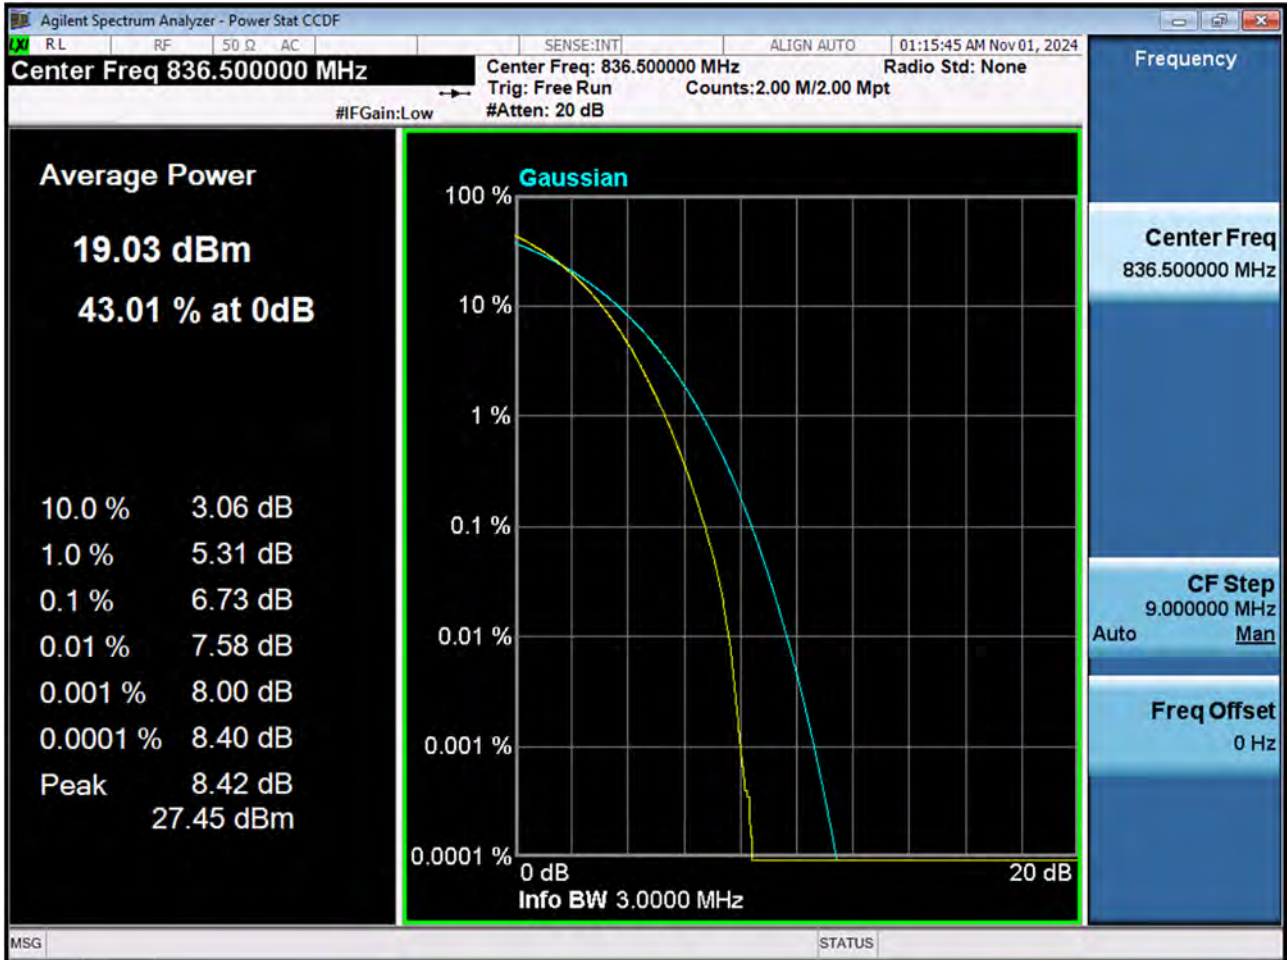


BAND 26. PAR Plot (5 M BW Ch.26915 QPSK_RB25_0)

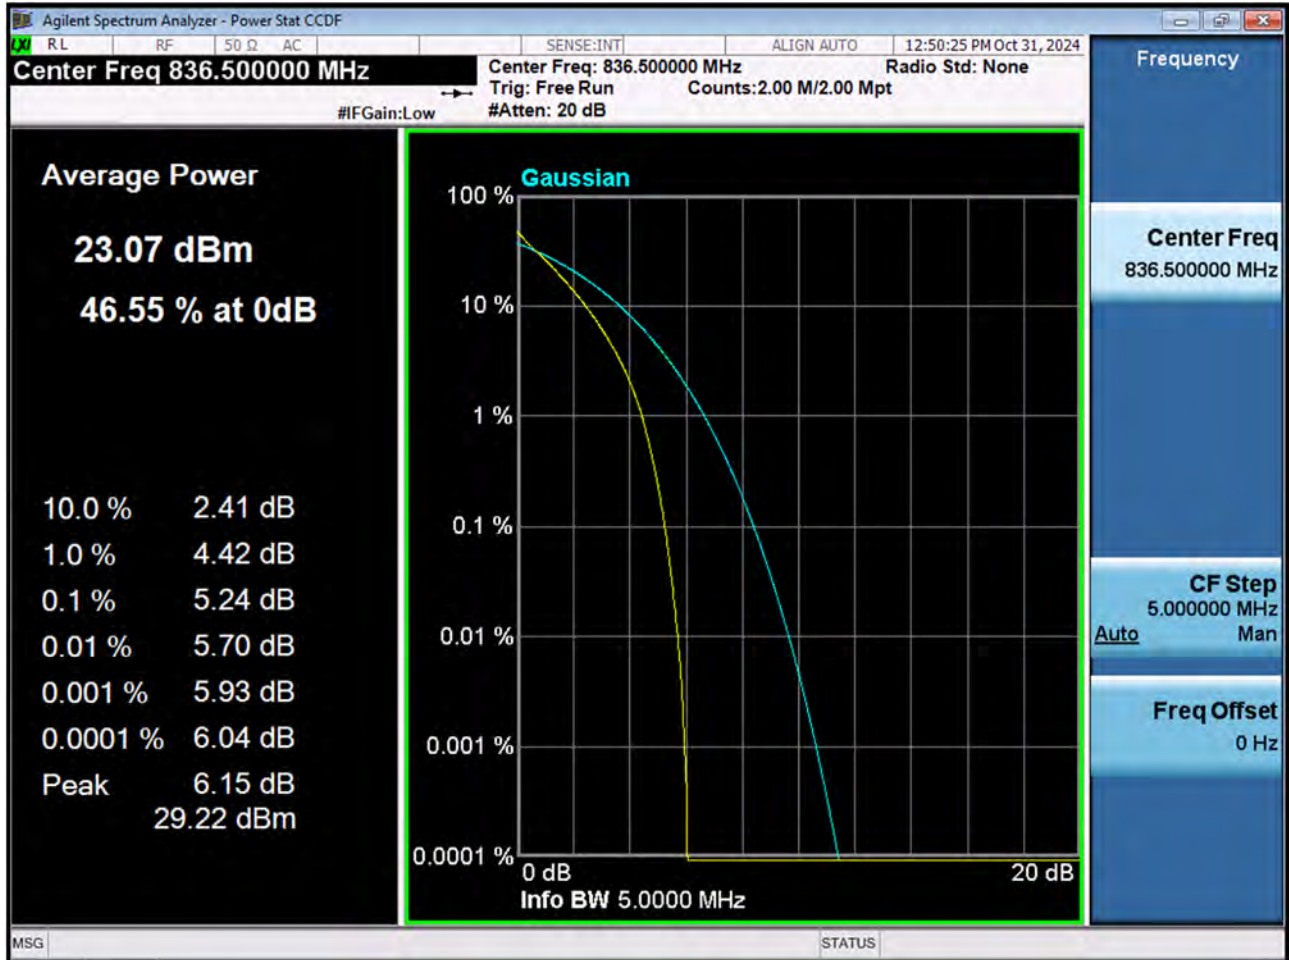


BAND 26. PAR Plot (5 M BW Ch.26915 16QAM_RB25_0)

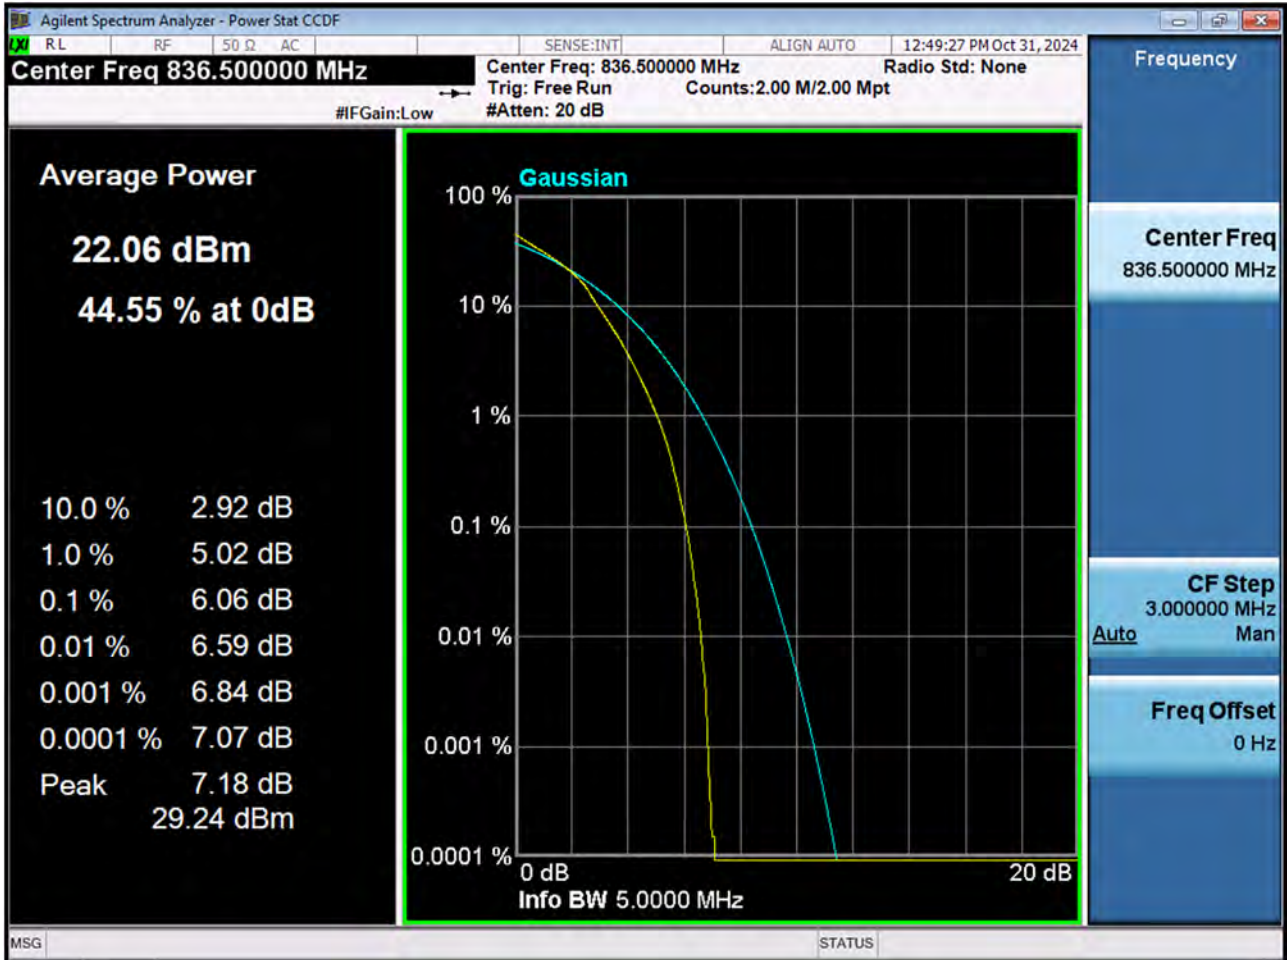


BAND 26. PAR Plot (5 M BW Ch.26915 64QAM_RB25_0)

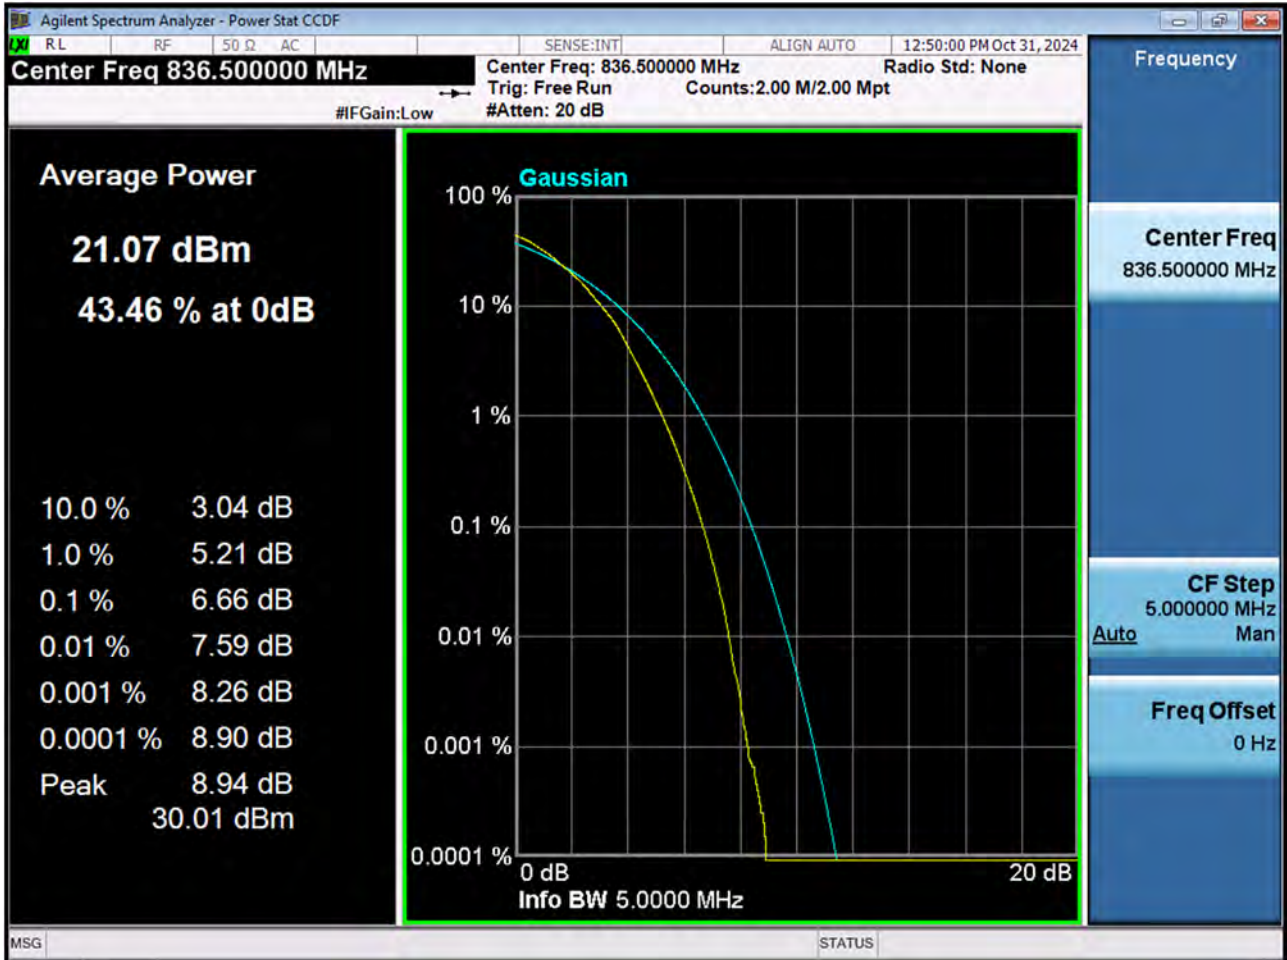


BAND 26. PAR Plot (5 M BW Ch.26915 256QAM_RB25_0)

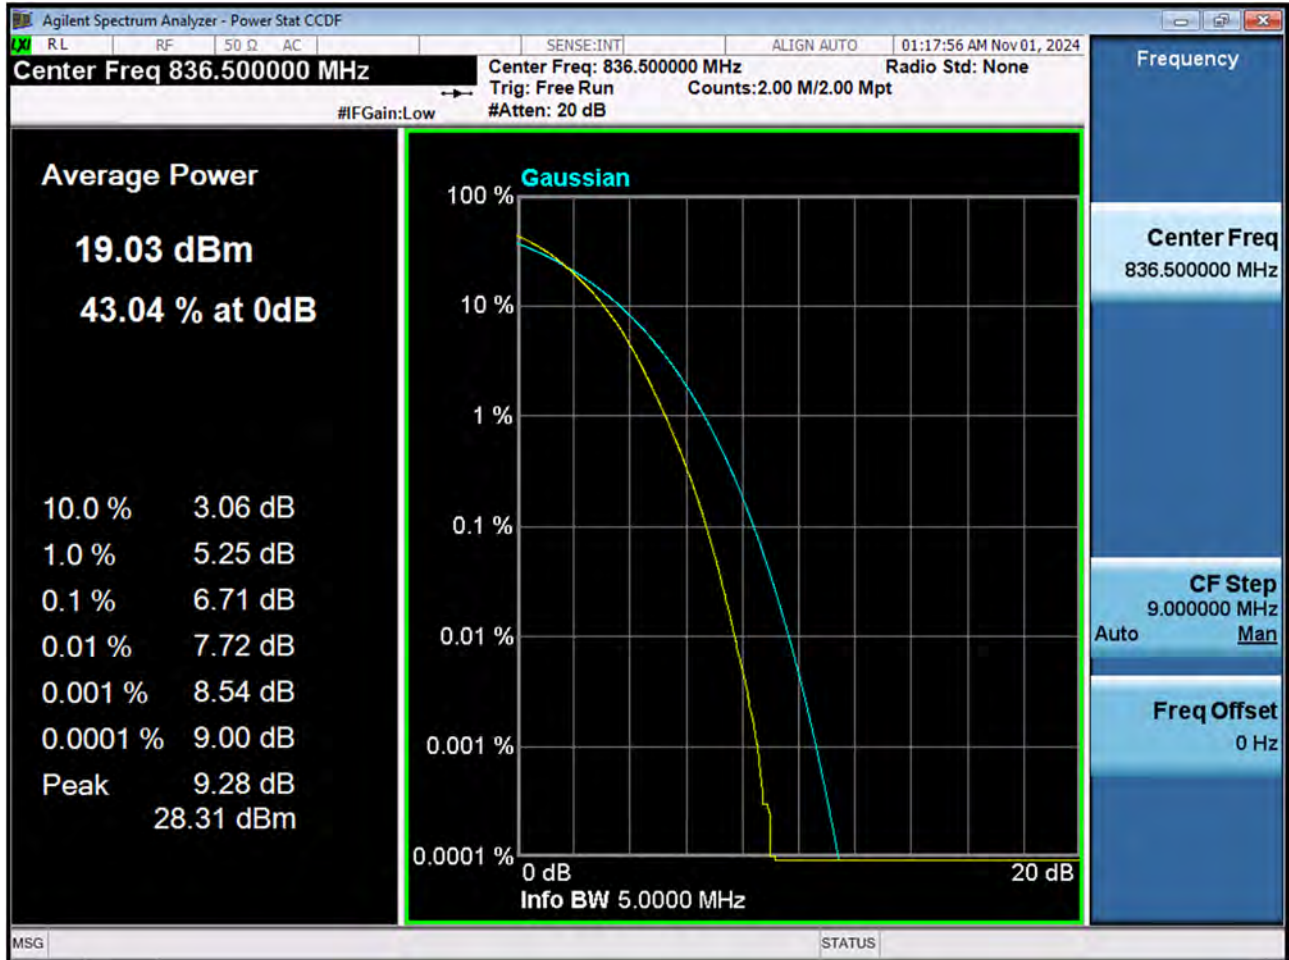


BAND 26. PAR Plot (10 M BW Ch.26915 QPSK_RB50_0)

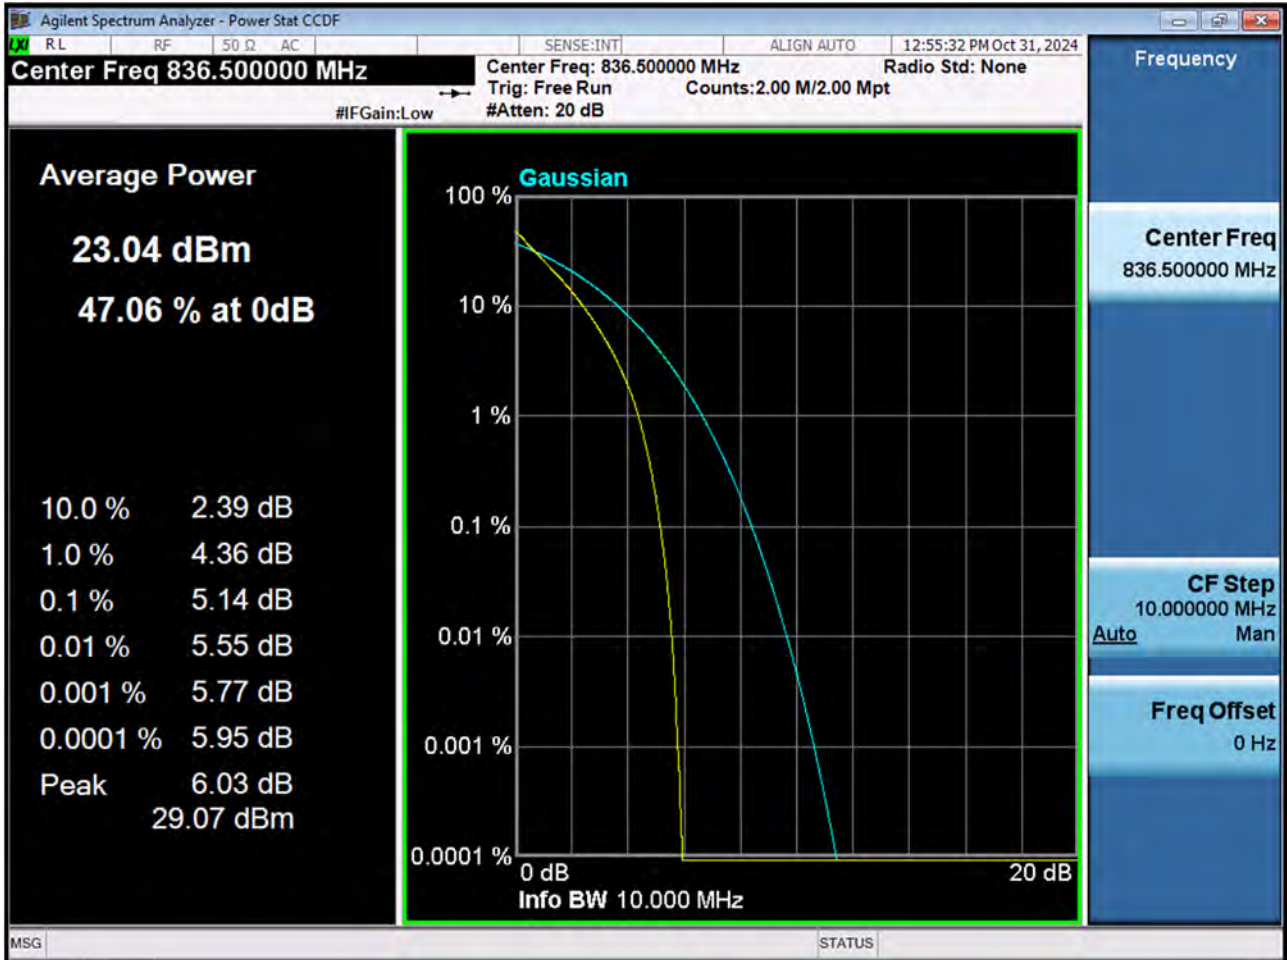


BAND 26. PAR Plot (10 M BW Ch.26915 16QAM_RB50_0)

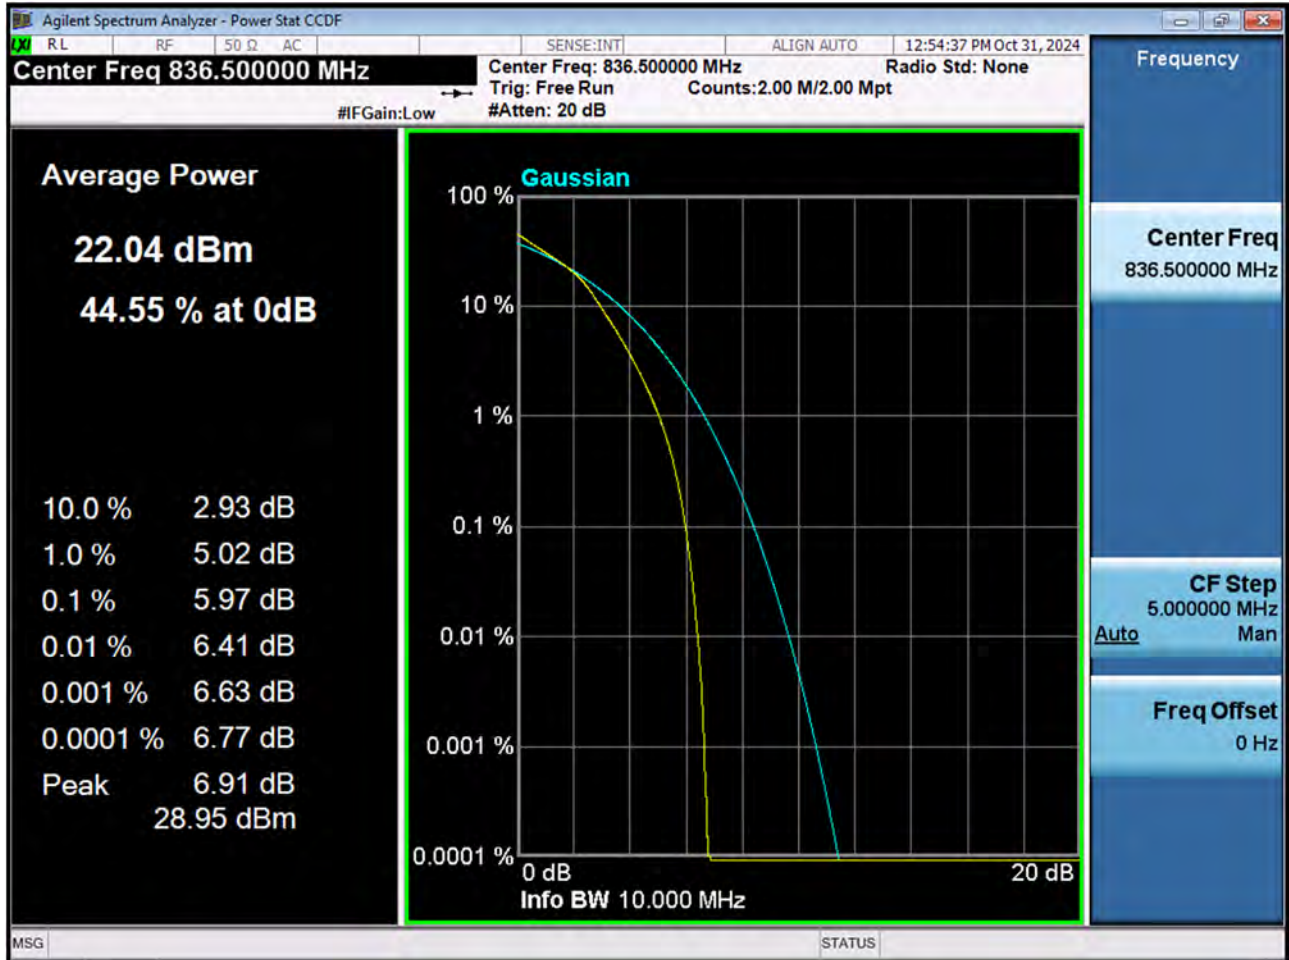


BAND 26. PAR Plot (10 M BW Ch.26915 64QAM_RB50_0)

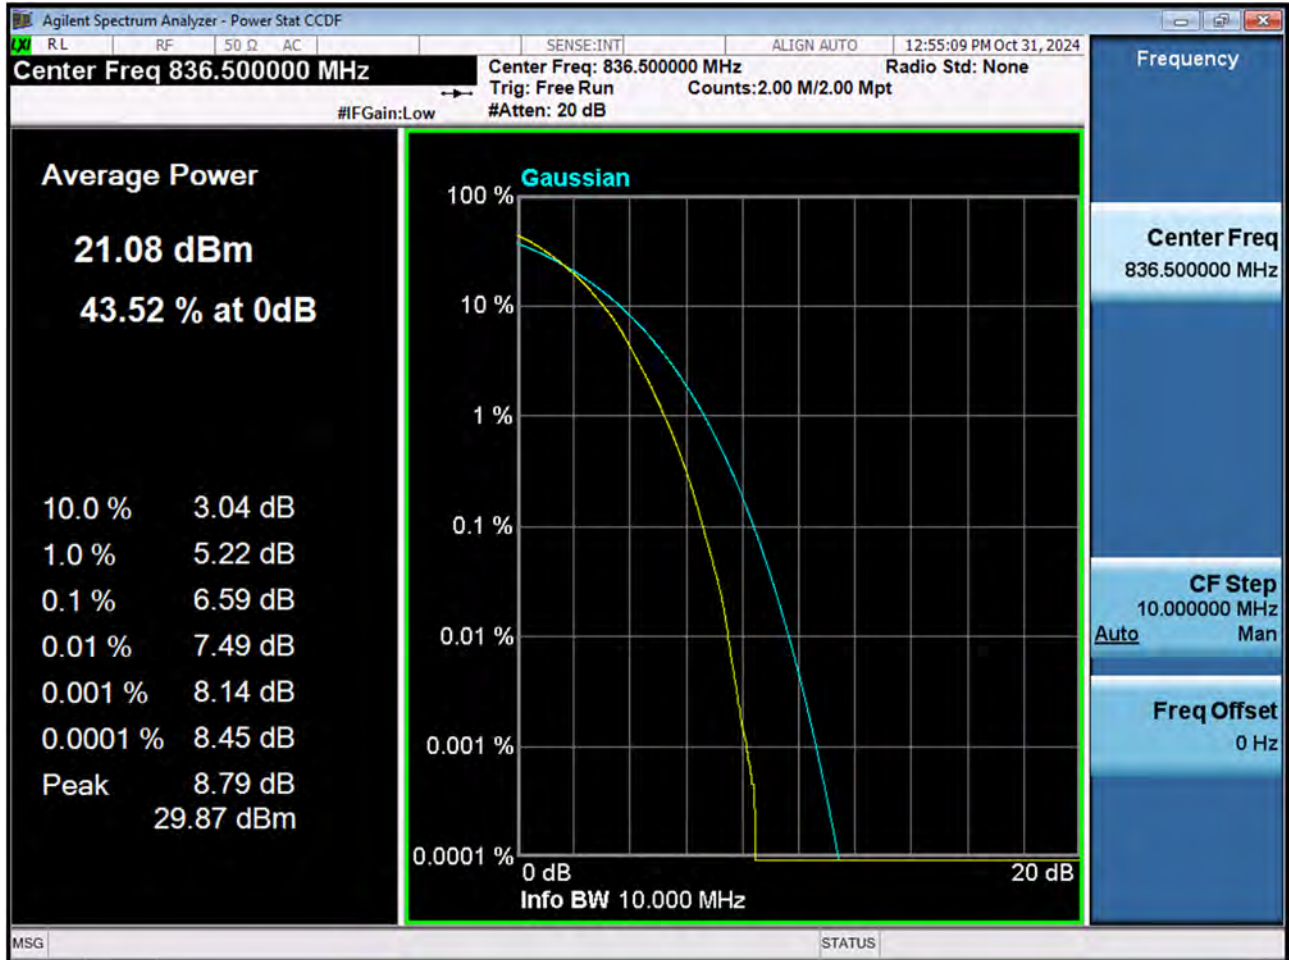


BAND 26. PAR Plot (10 M BW Ch. 26915 256QAM_RB50_0)

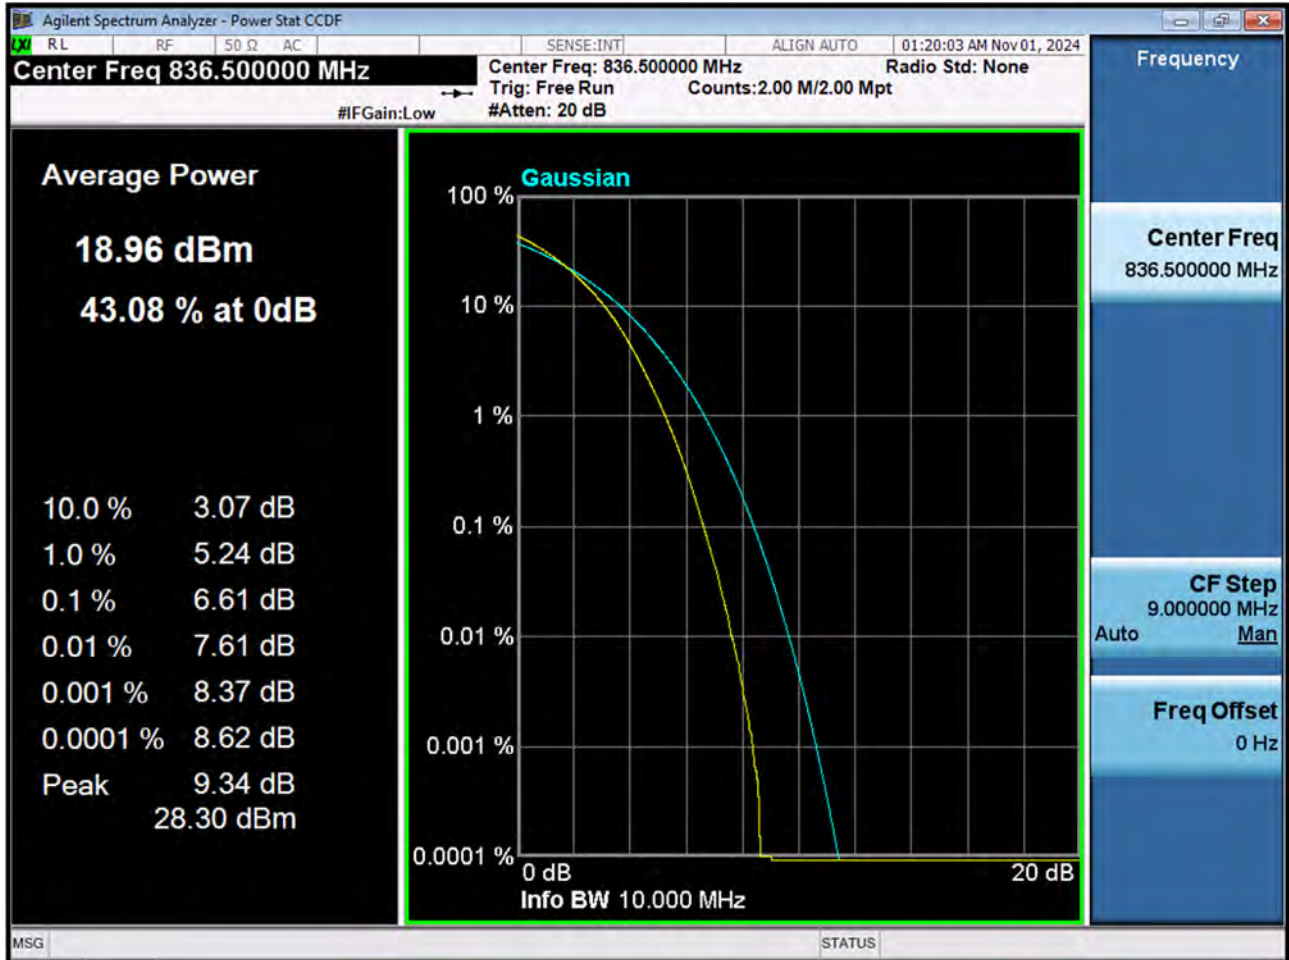


BAND 26. PAR Plot (15 M BW Ch.26915 QPSK RB 75_0)

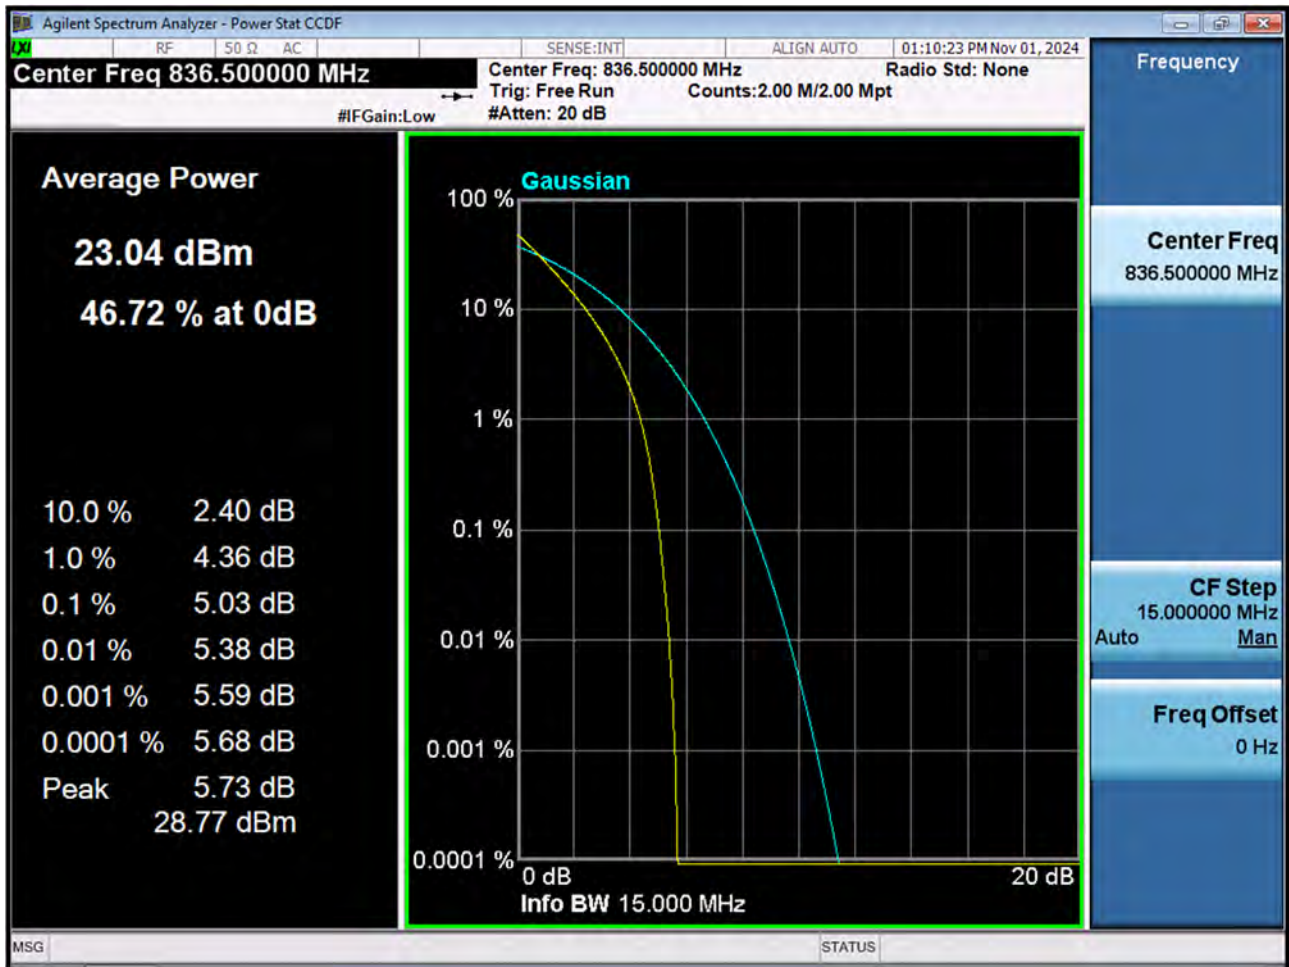


BAND 26. PAR Plot (15 M BW Ch.26915 16QAM RB 75_0)

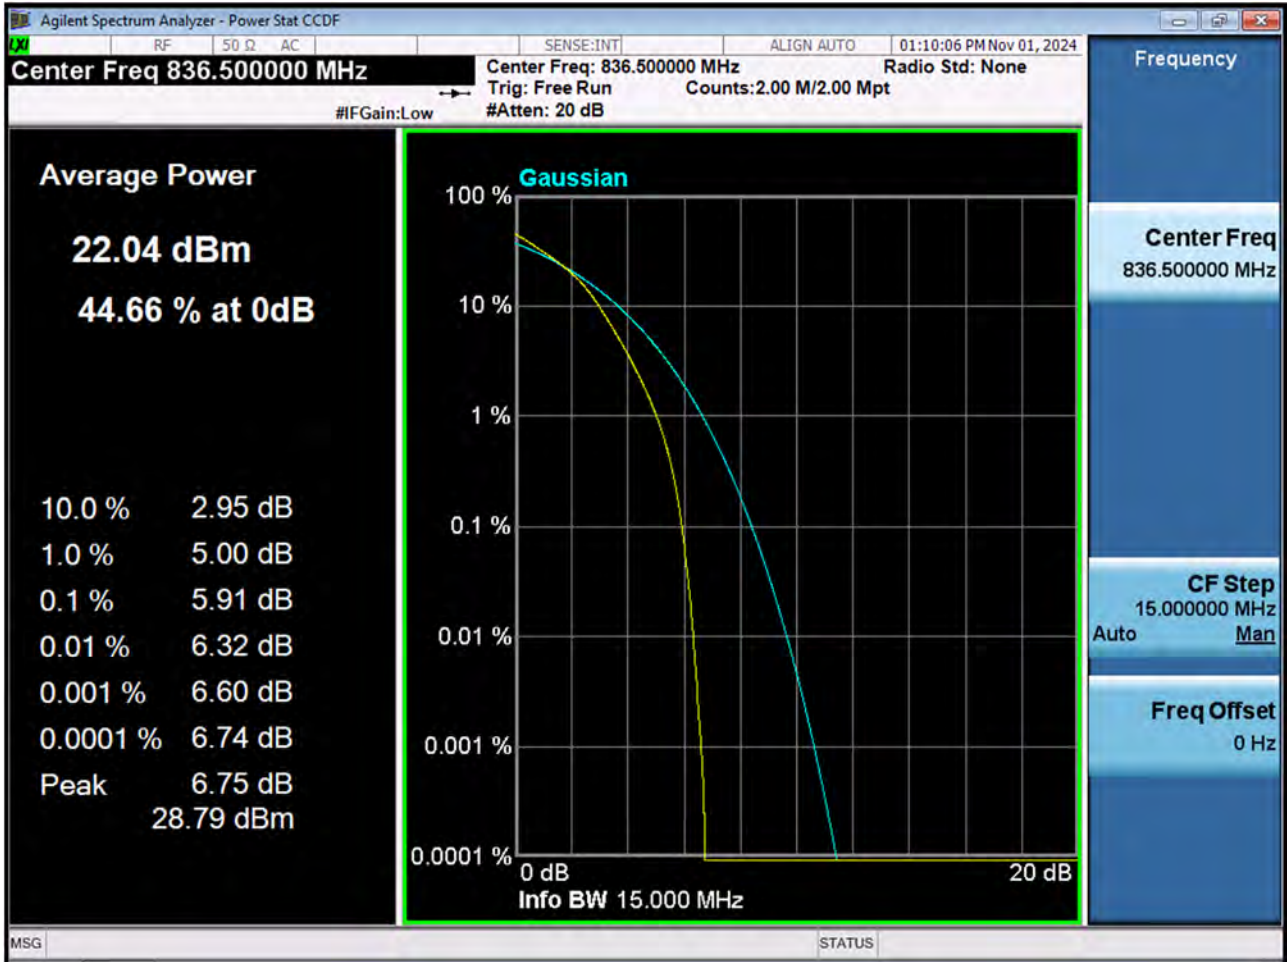


BAND 26. PAR Plot (15 M BW Ch.26915 64QAM RB 75_0)

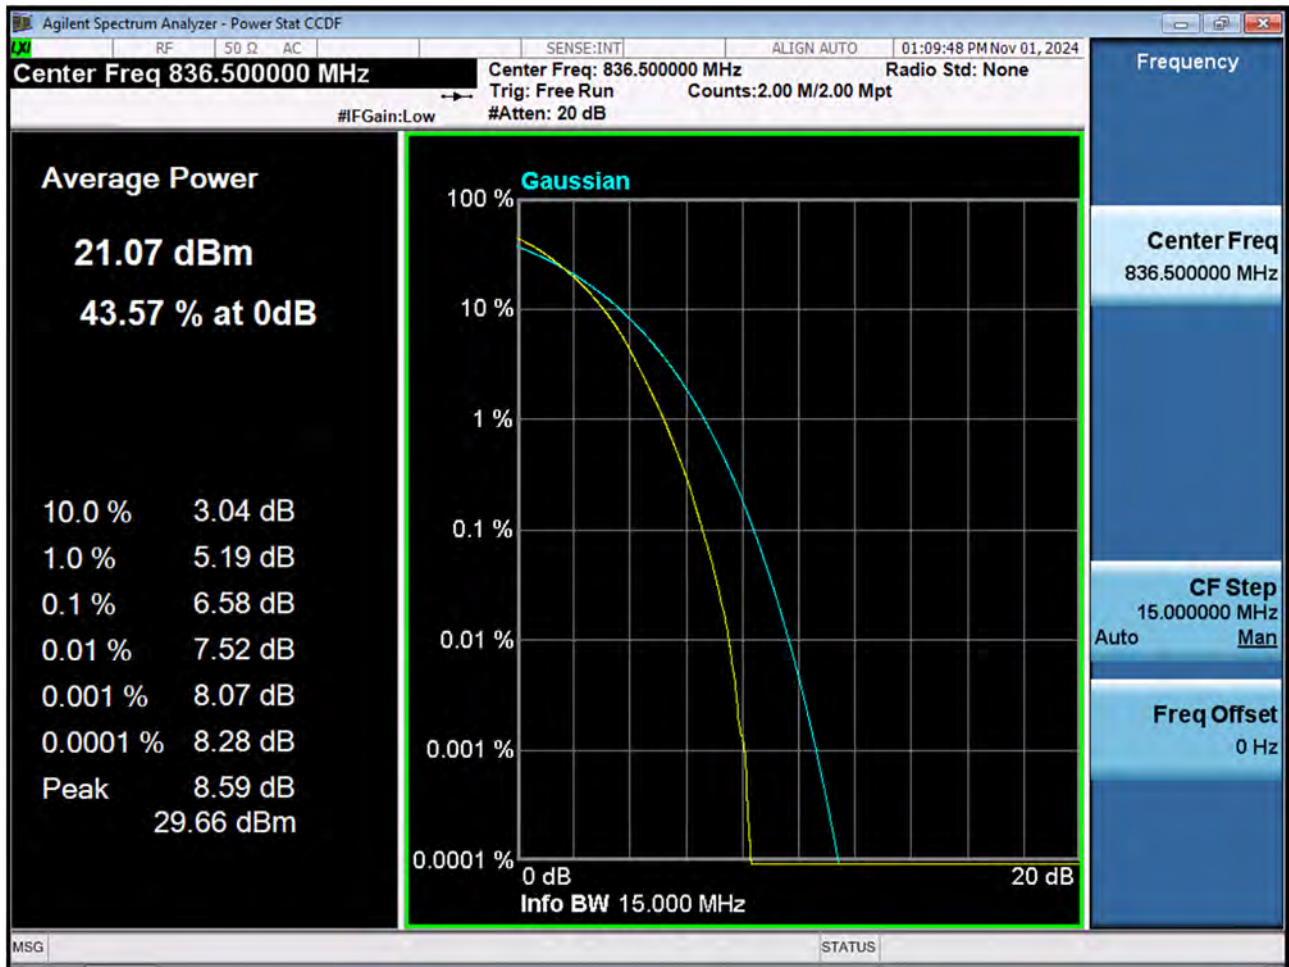


BAND 26. PAR Plot (15 M BW Ch.26915 256QAM RB 75_0)

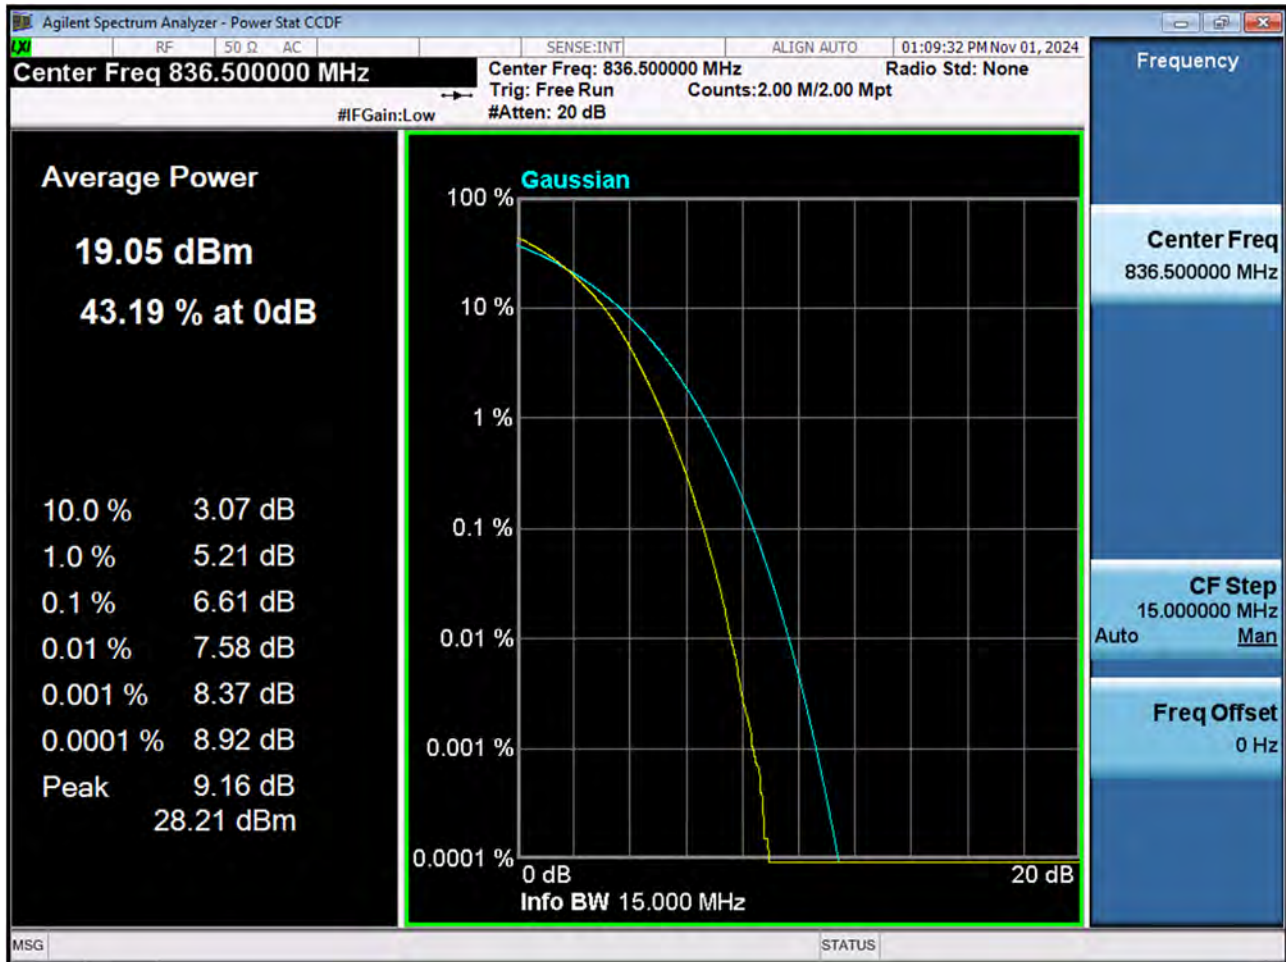


BAND 26. Lower Band Edge Plot (1.4 M BW Ch.26797 QPSK_RB1_Offset 0)

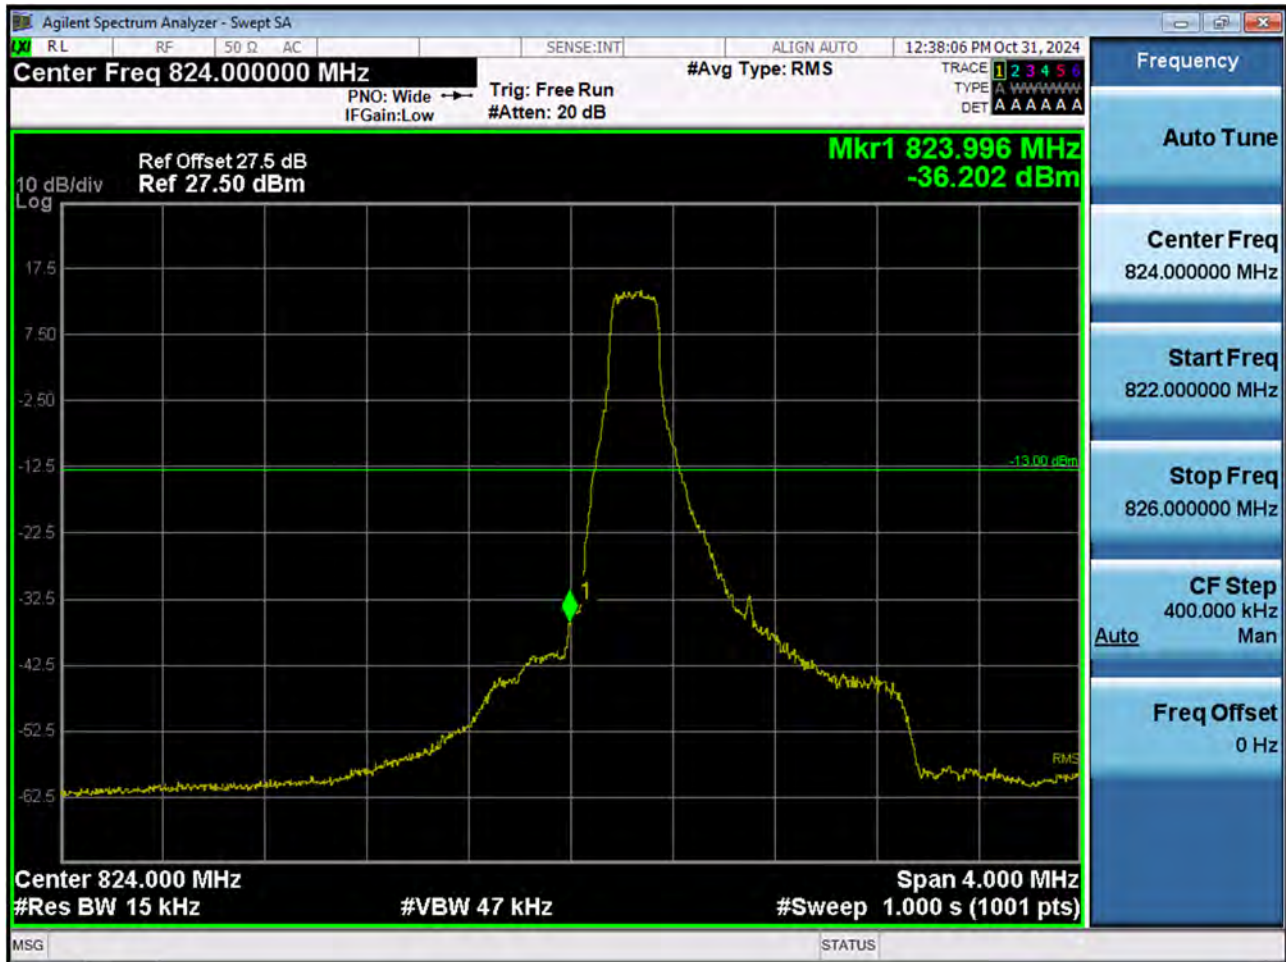


BAND 26. Lower Band Edge Plot (1.4 M BW Ch.26797 QPSK_RB6_Offset 0)

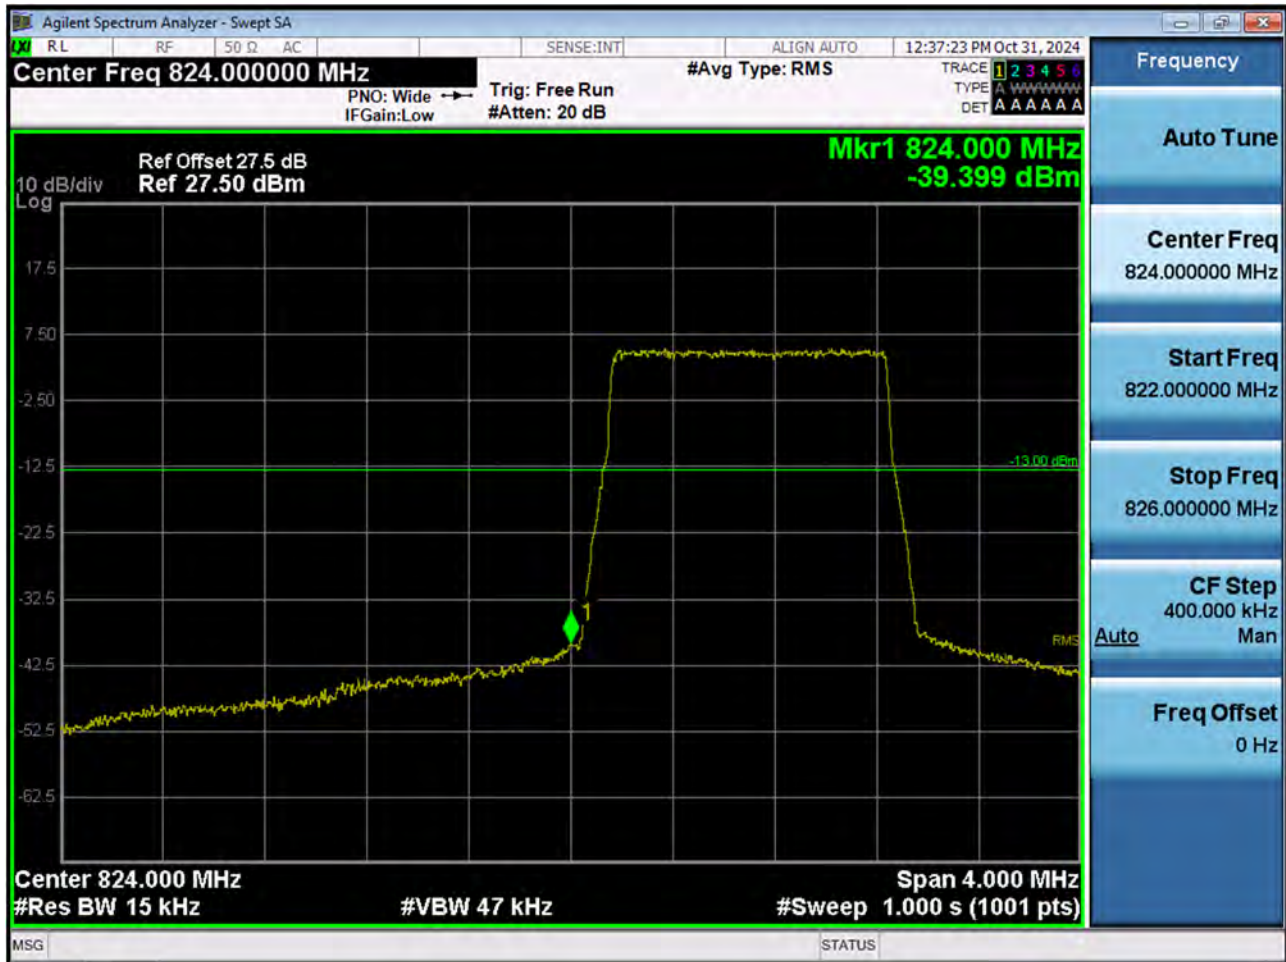


BAND 26. Lower Extended Band Edge Plot (1.4 M BW Ch.26797 QPSK_RB6_0)

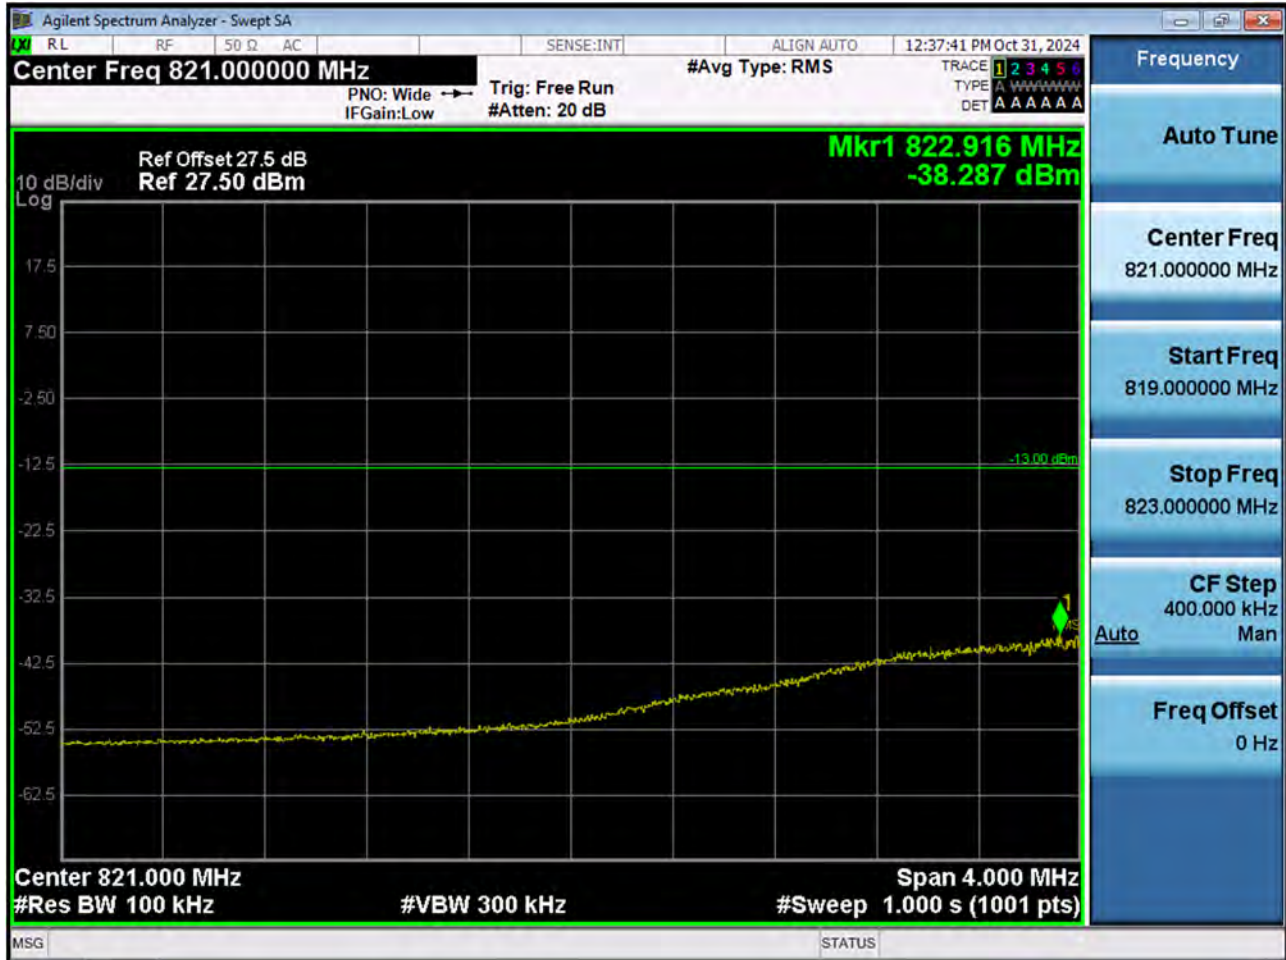


BAND 26. Lower Band Edge Plot (3 M BW Ch.26805 QPSK_RB1_Offset 0)

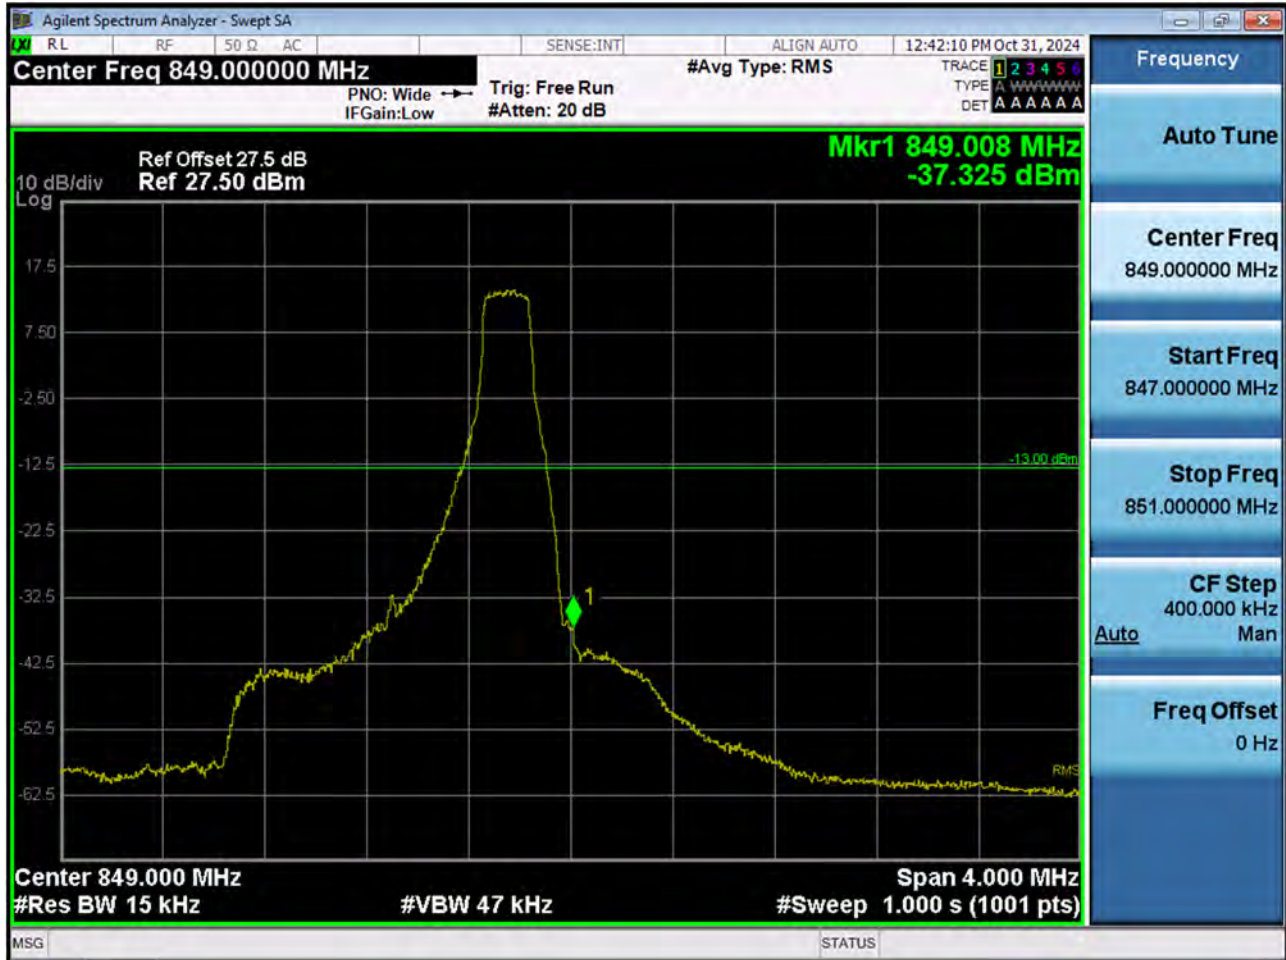


BAND 26. Lower Band Edge Plot (3 M BW Ch.26805 QPSK_RB15_Offset 0)

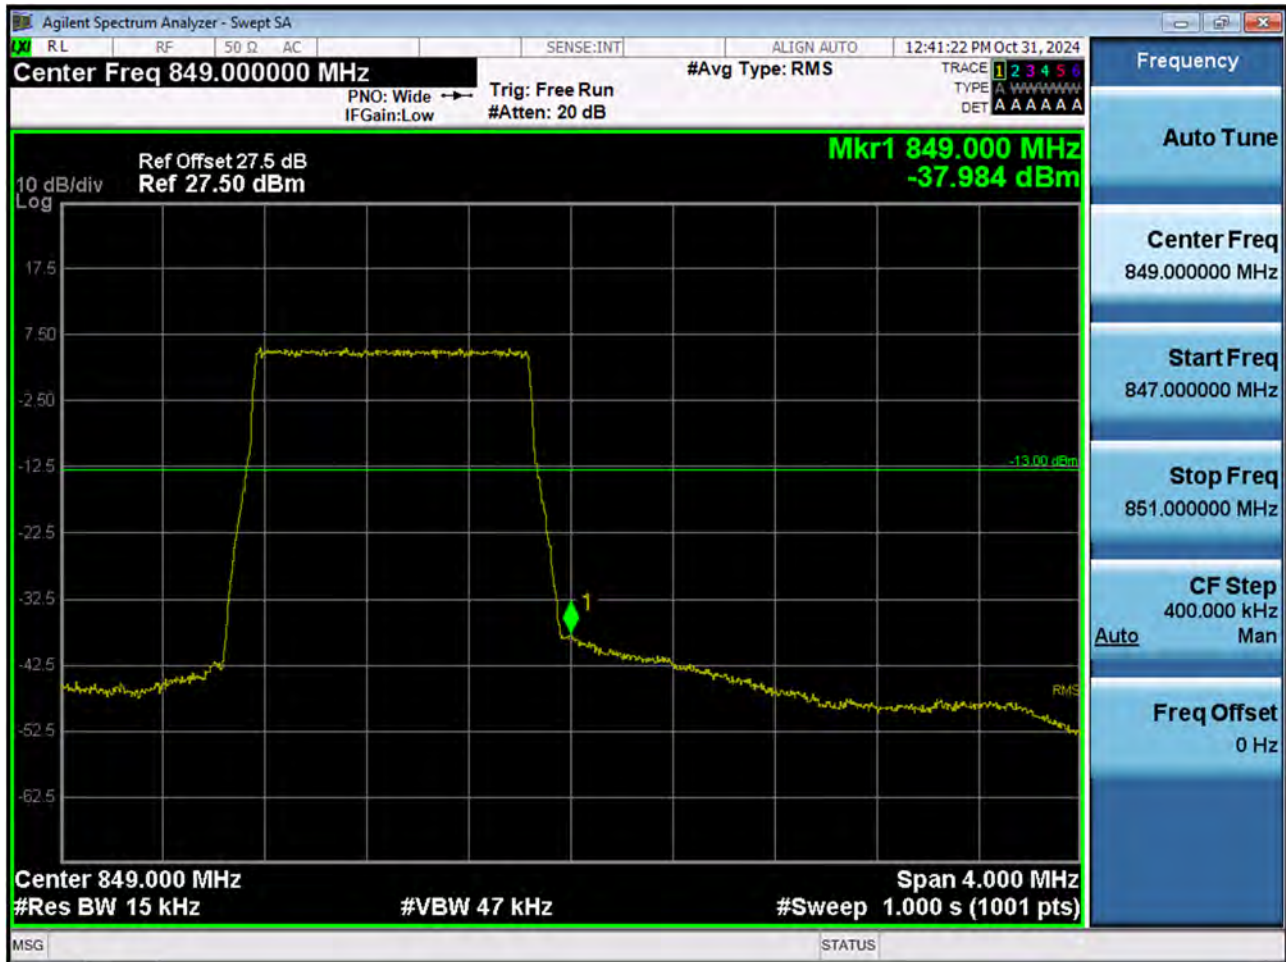


BAND 26. Lower Extended Band Edge Plot (3 M BW Ch.26805 QPSK_RB15_0)



BAND 26. Lower Band Edge Plot (5 M BW Ch.26815 QPSK_RB1_Offset 0)

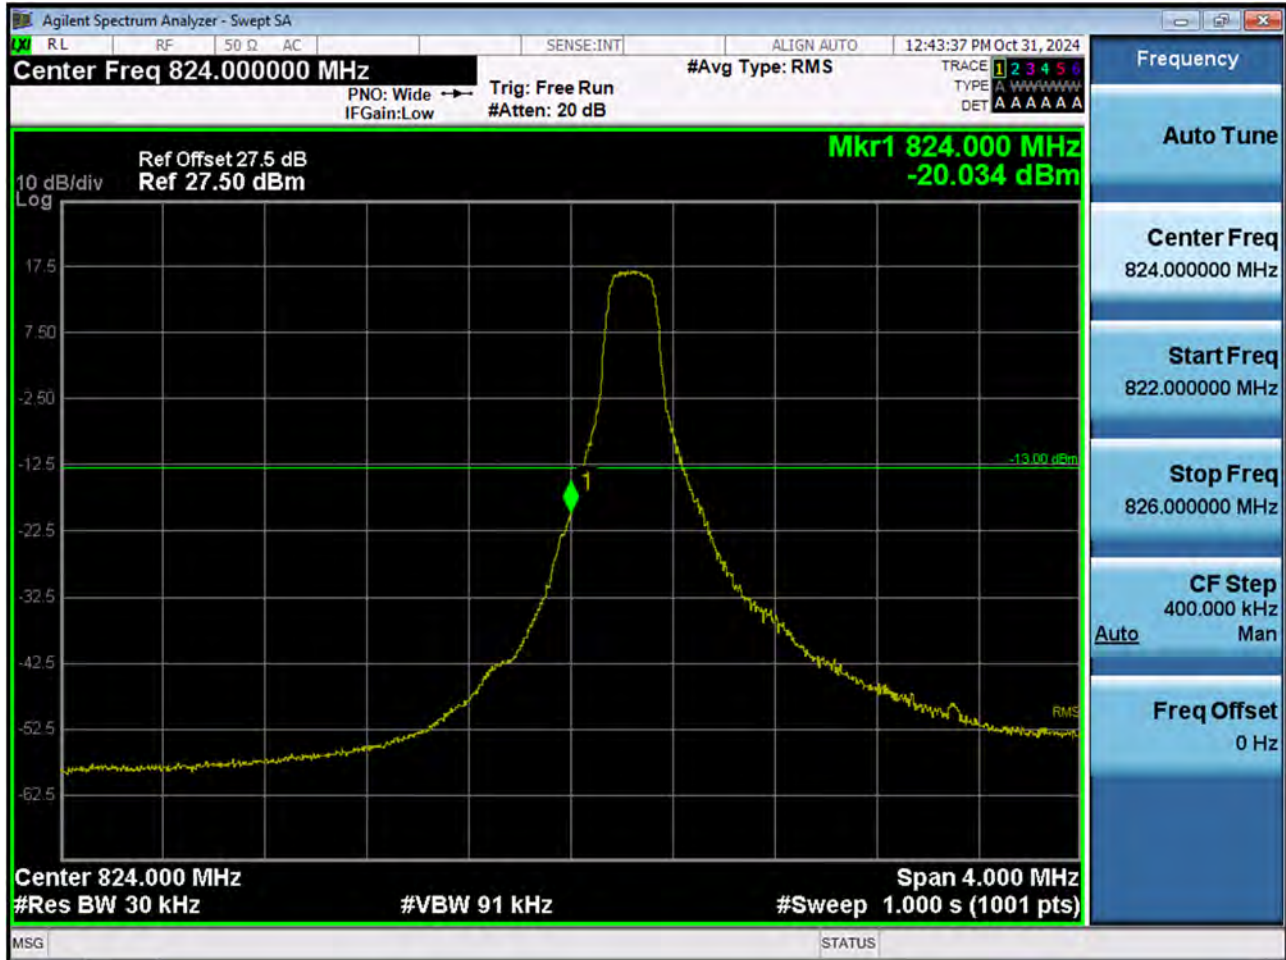


BAND 26. Lower Band Edge Plot (5 M BW Ch.26815 QPSK_RB25_Offset 0)

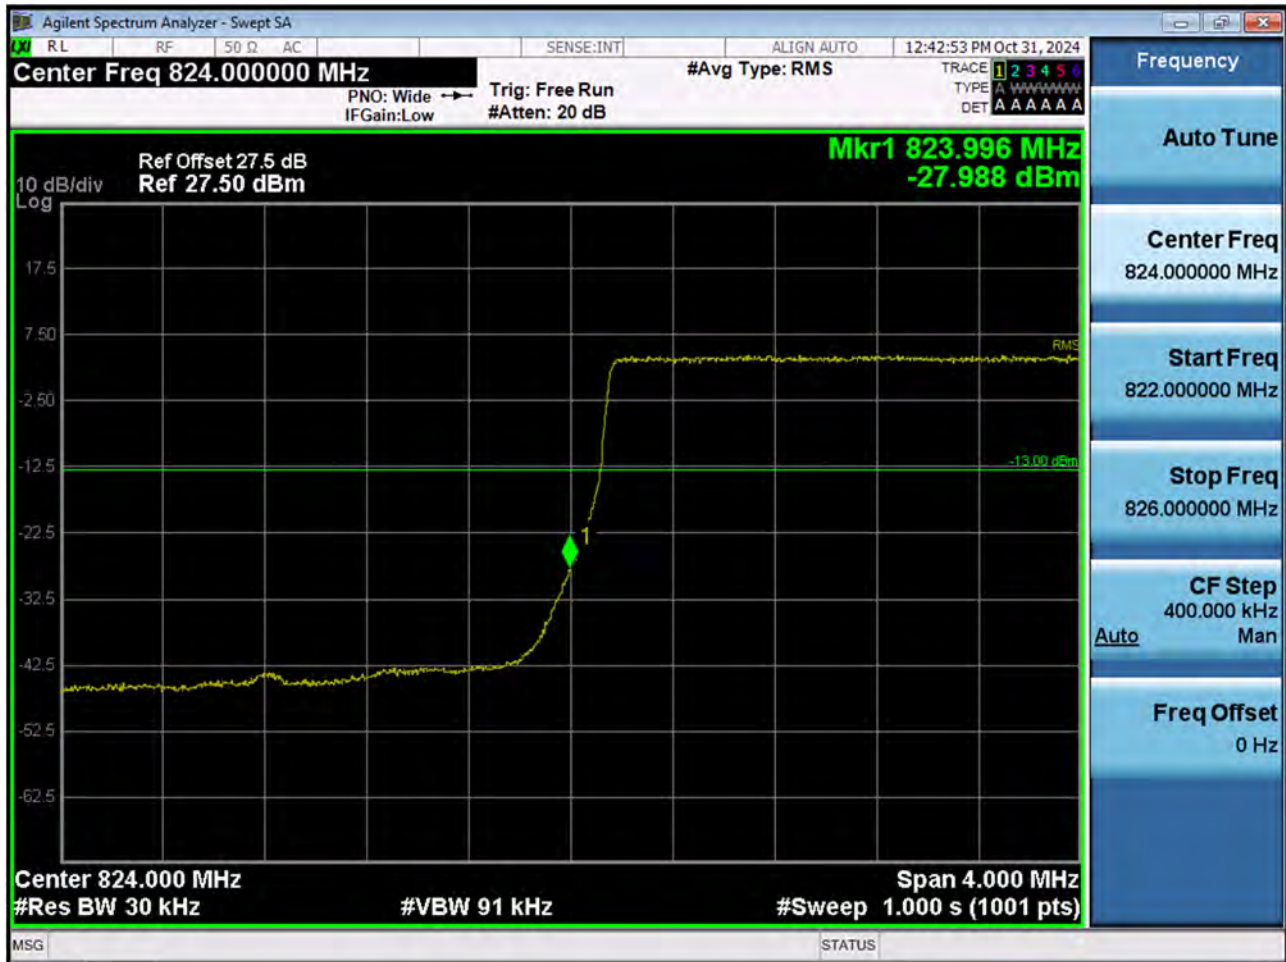


BAND 26. Lower Extended Band Edge Plot (5 M BW Ch.26815 QPSK_RB25_0)




BAND 26. Lower Band Edge Plot (10 M BW Ch.26840 QPSK_RB1_Offset 0)

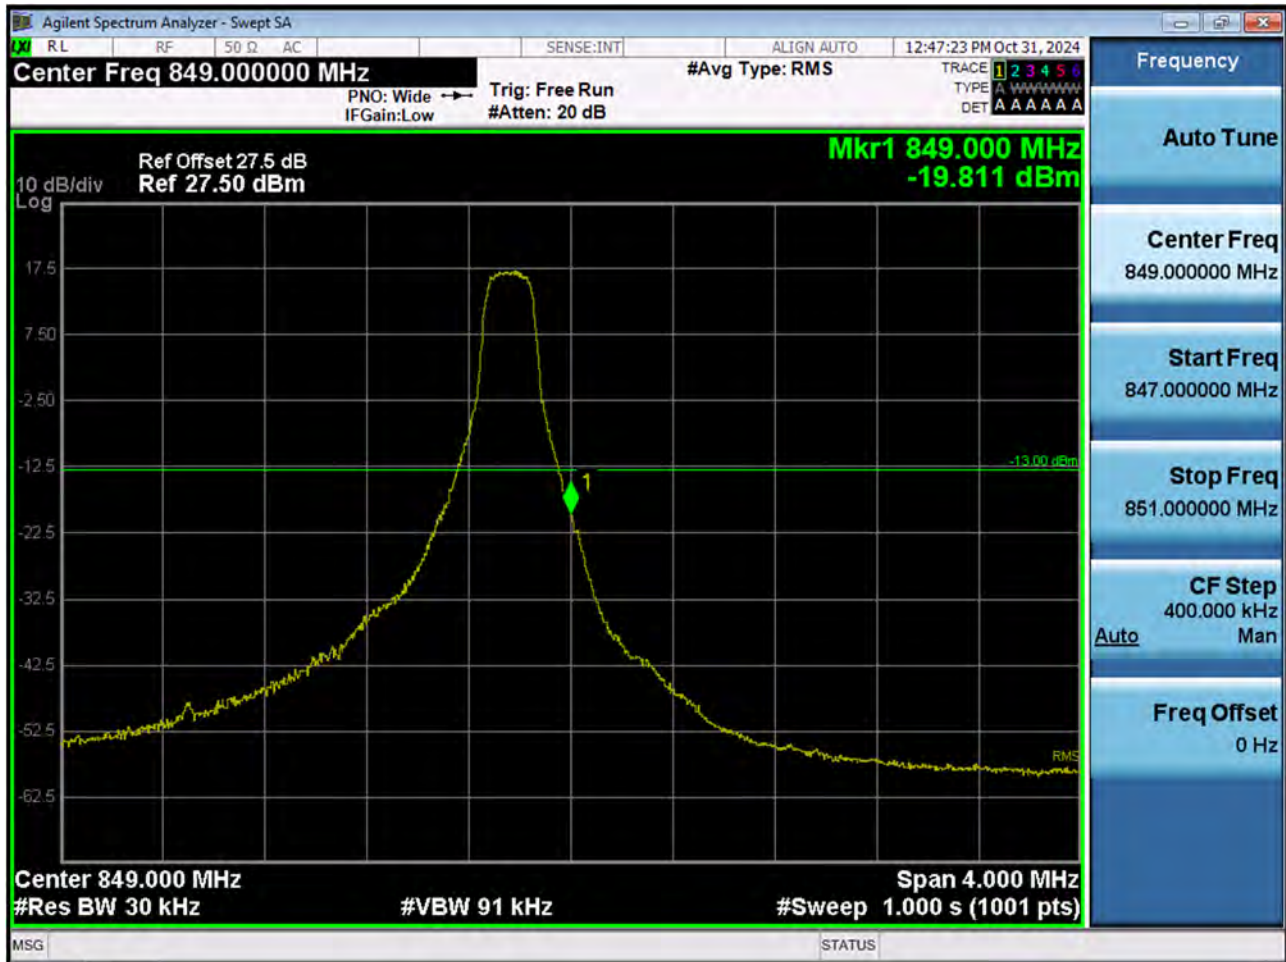


BAND 26. Lower Band Edge Plot (10 M BW Ch.26840 QPSK_RB50_Offset 0)

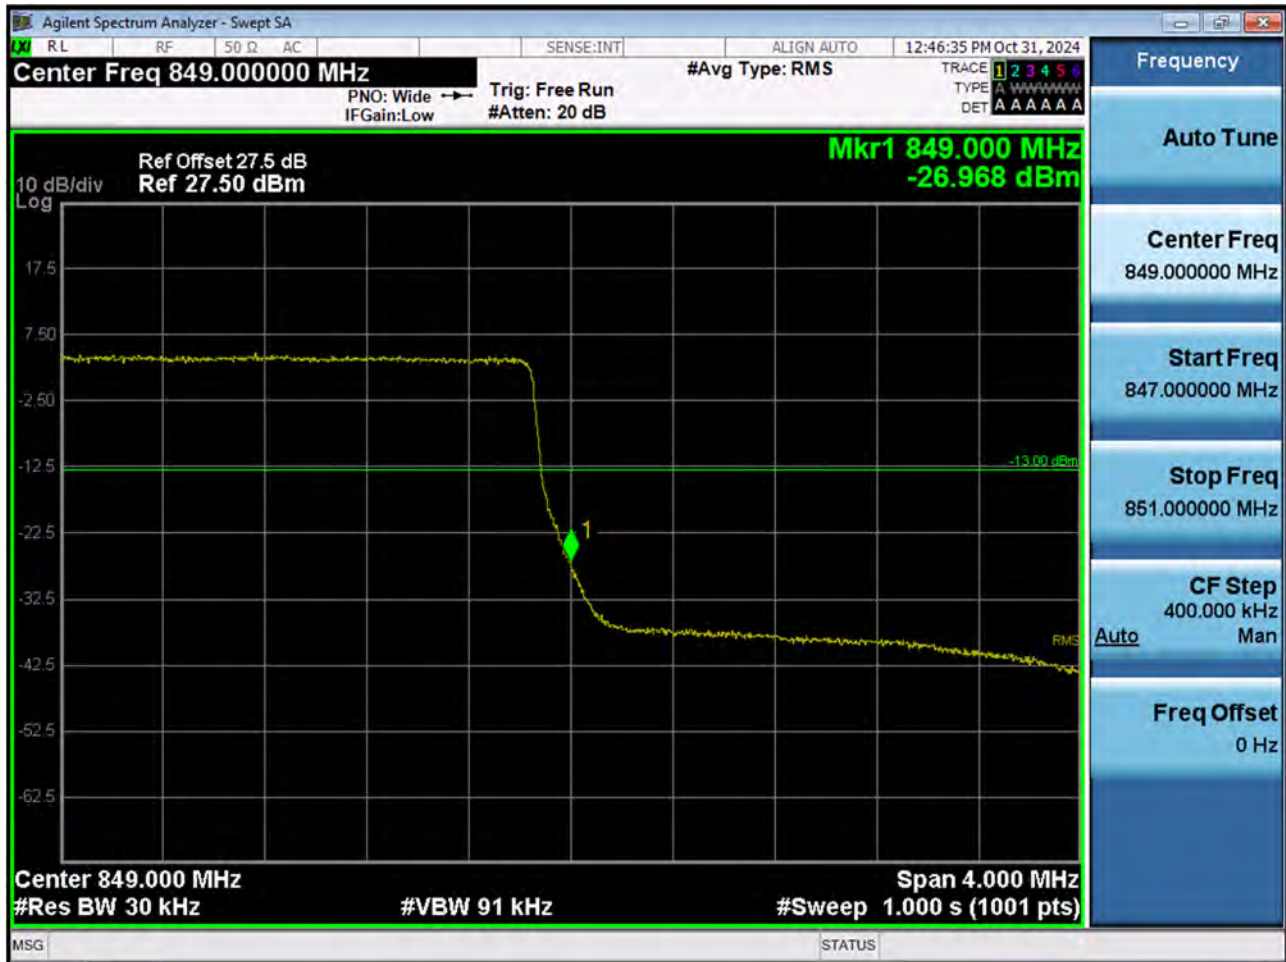

BAND 26. Lower Extended Band Edge Plot (10 M BW Ch.26840 QPSK_RB50_0)

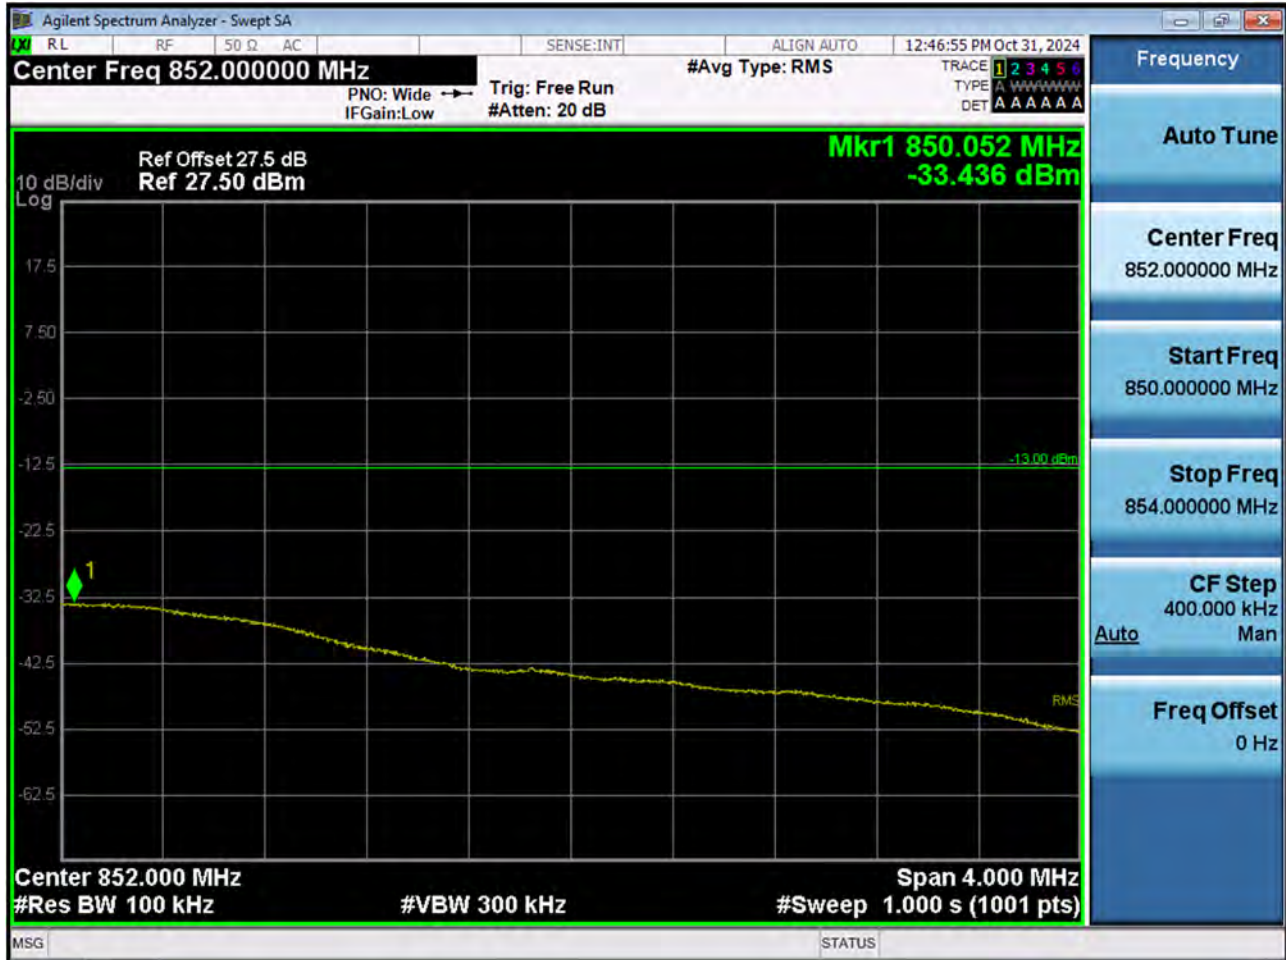


BAND 26. Lower Band Edge Plot (15 M BW Ch.26865 QPSK_RB1_Offset 0)

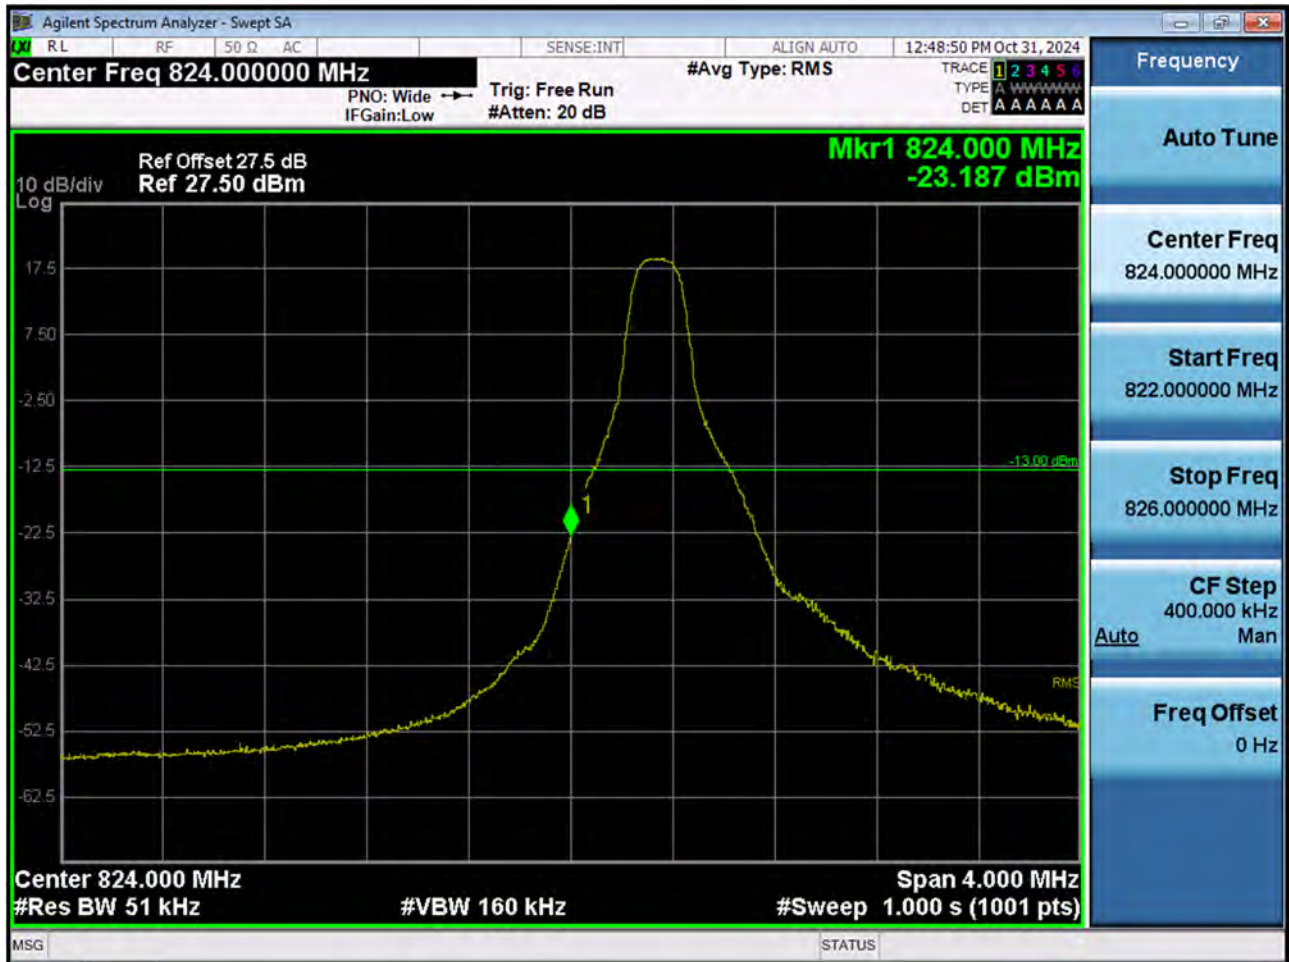

BAND 26. Lower Band Edge Plot (15 M BW Ch.26865 QPSK_RB75_Offset 0)



BAND 26. Lower Extended Band Edge Plot (15 M BW Ch.26865 QPSK_RB75_0)

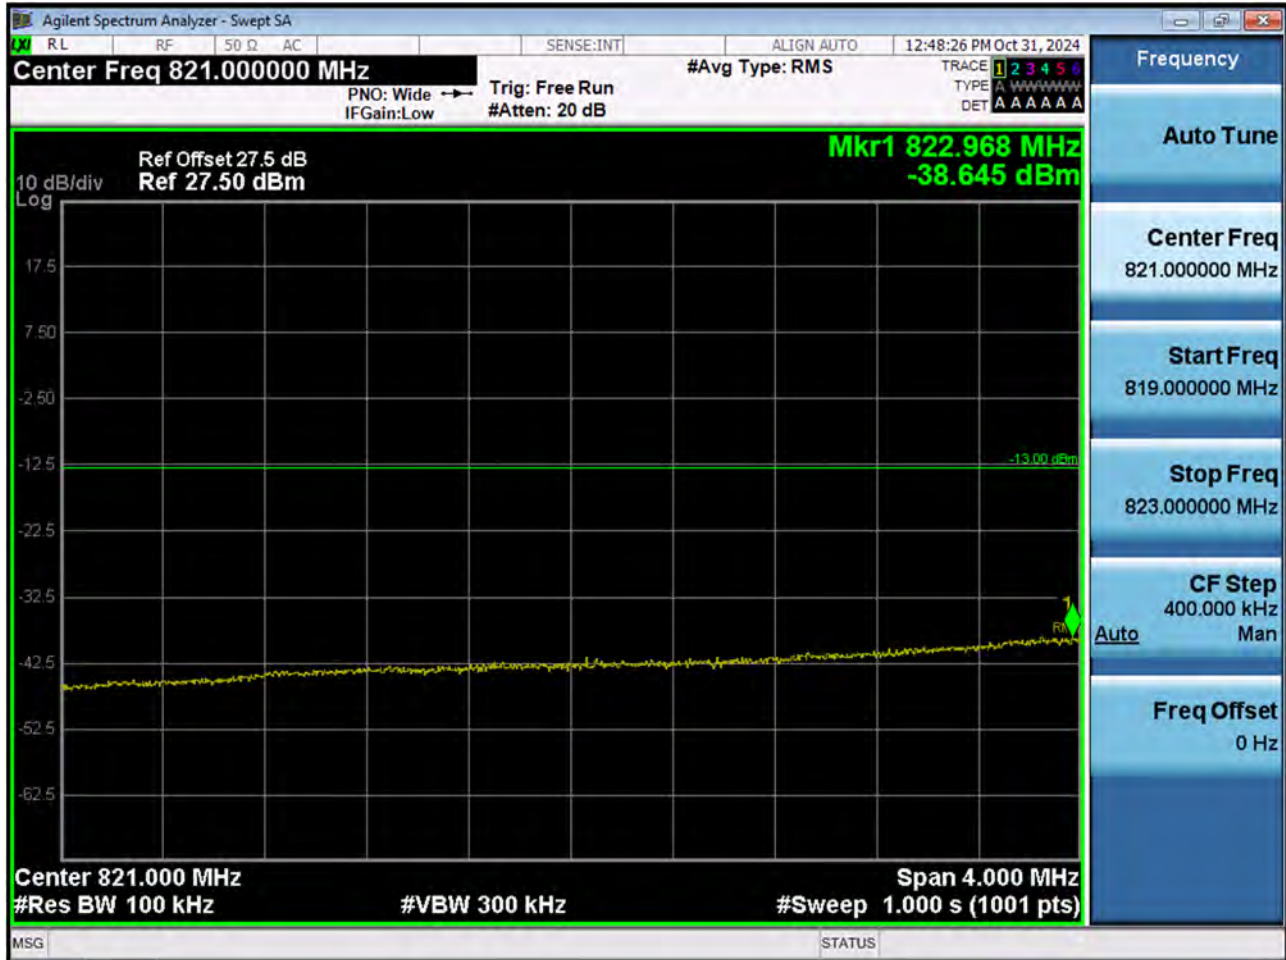

Agilent Spectrum Analyzer - Swept SA

RL RF 50 Ω AC SENSE:INT ALIGN AUTO 12:52:34 PM Oct 31, 2024

Center Freq 849.000000 MHz #Avg Type: RMS

PNO: Wide Trg: Free Run
IFGain:Low #Atten: 20 dB

TRACE 1 2 3 4 5 6
TYPE A W W W W W W
DET A A A A A A

10 dB/div
Log

Ref Offset 27.5 dB
Ref 27.50 dBm

Mkr1 849.000 MHz
-22.883 dBm

Center 849.000 MHz
#Res BW 51 kHz #VBW 160 kHz #Sweep 1.000 s (1001 pts)

MSG STATUS

BAND 26. Upper Band Edge Plot (1.4 M BW Ch.27033 QPSK_RB6_Offset 0)



BAND 26. Upper Extended Band Edge Plot (1.4 M BW Ch.27033 QPSK_RB6_0)



BAND 26. Upper Band Edge Plot (3 M BW Ch.27025 QPSK_RB1_Offset 14)




BAND 26. Upper Band Edge Plot (3 M BW Ch.27025 QPSK_RB15_Offset 0)



BAND 26. Upper Extended Band Edge Plot (3 M BW Ch.27025 QPSK_RB15_0)



BAND 26. Upper Band Edge Plot (5 M BW Ch.27015 QPSK_RB1_Offset 24)

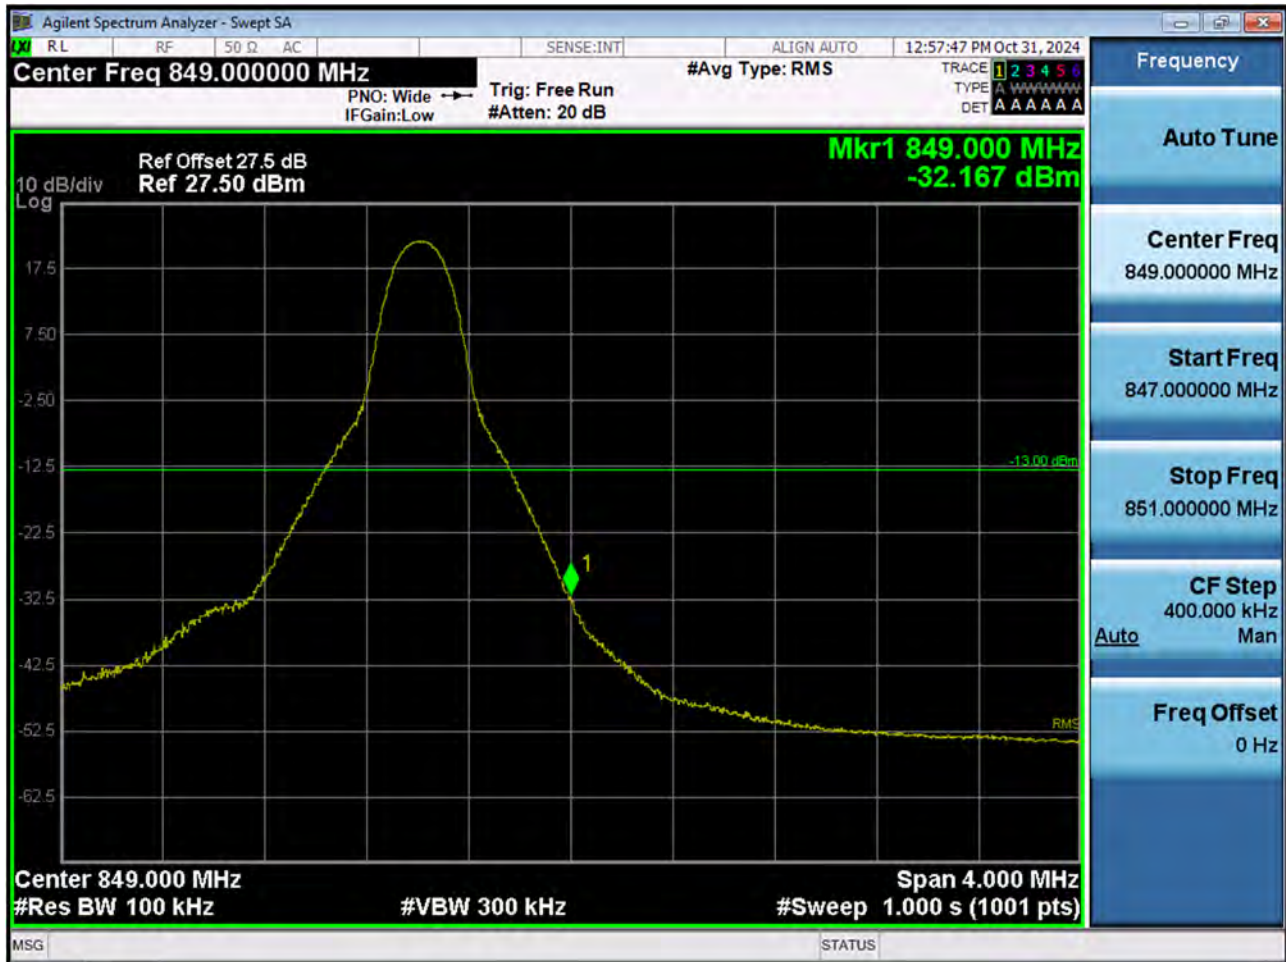


BAND 26. Upper Band Edge Plot (5 M BW Ch.27015 QPSK_RB25_Offset 0)



BAND 26. Upper Extended Band Edge Plot (5 M BW Ch.27015 QPSK_RB25_0)




BAND 26. Upper Band Edge Plot (10 M BW Ch.26990 QPSK_RB1_Offset 49)

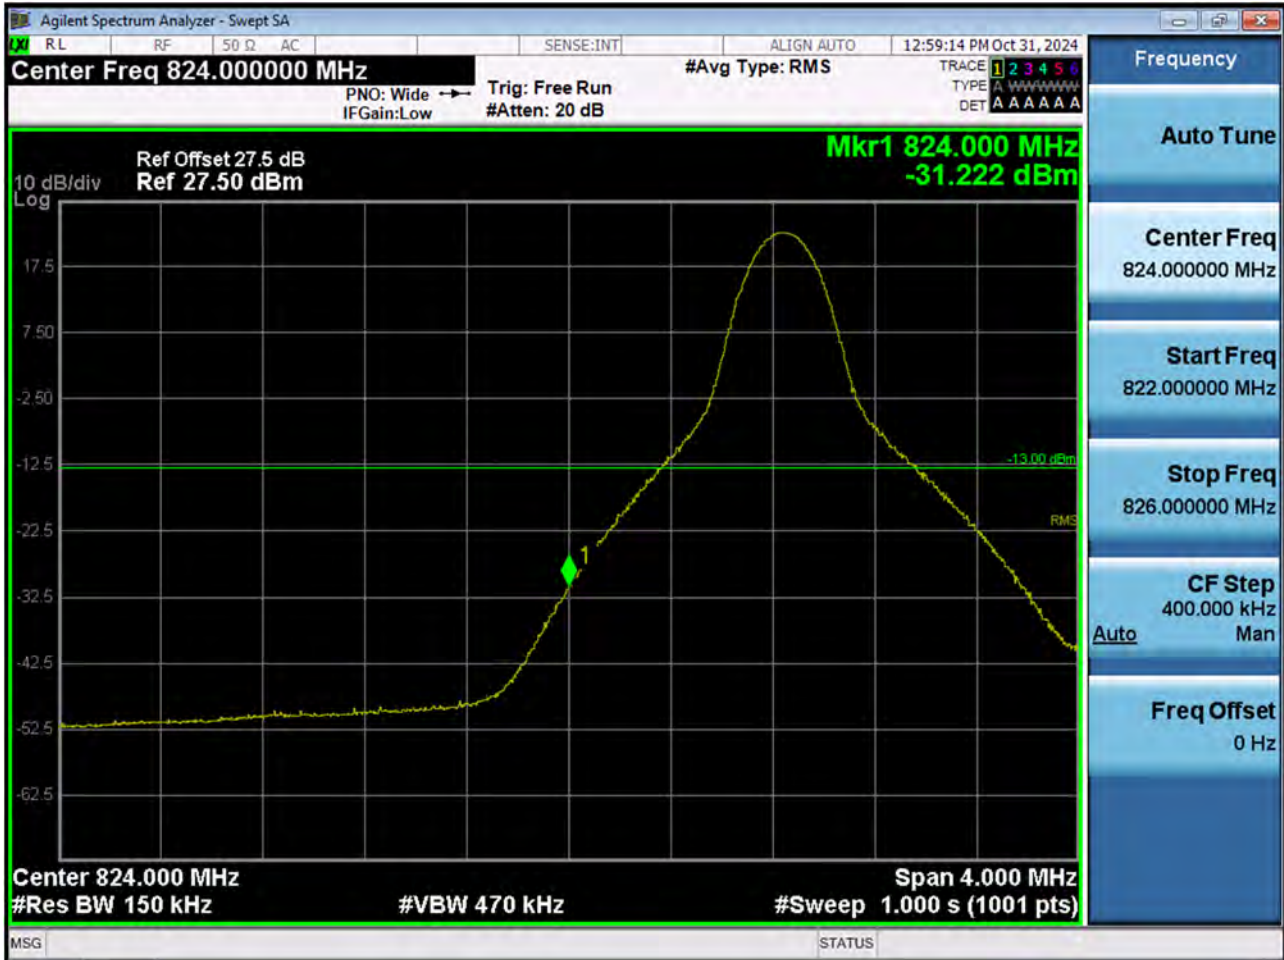

BAND 26. Upper Band Edge Plot (10 M BW Ch.26990 QPSK_RB50_Offset 0)



BAND 26. Upper Extended Band Edge Plot (10 M BW Ch.26990 QPSK_RB50_0)

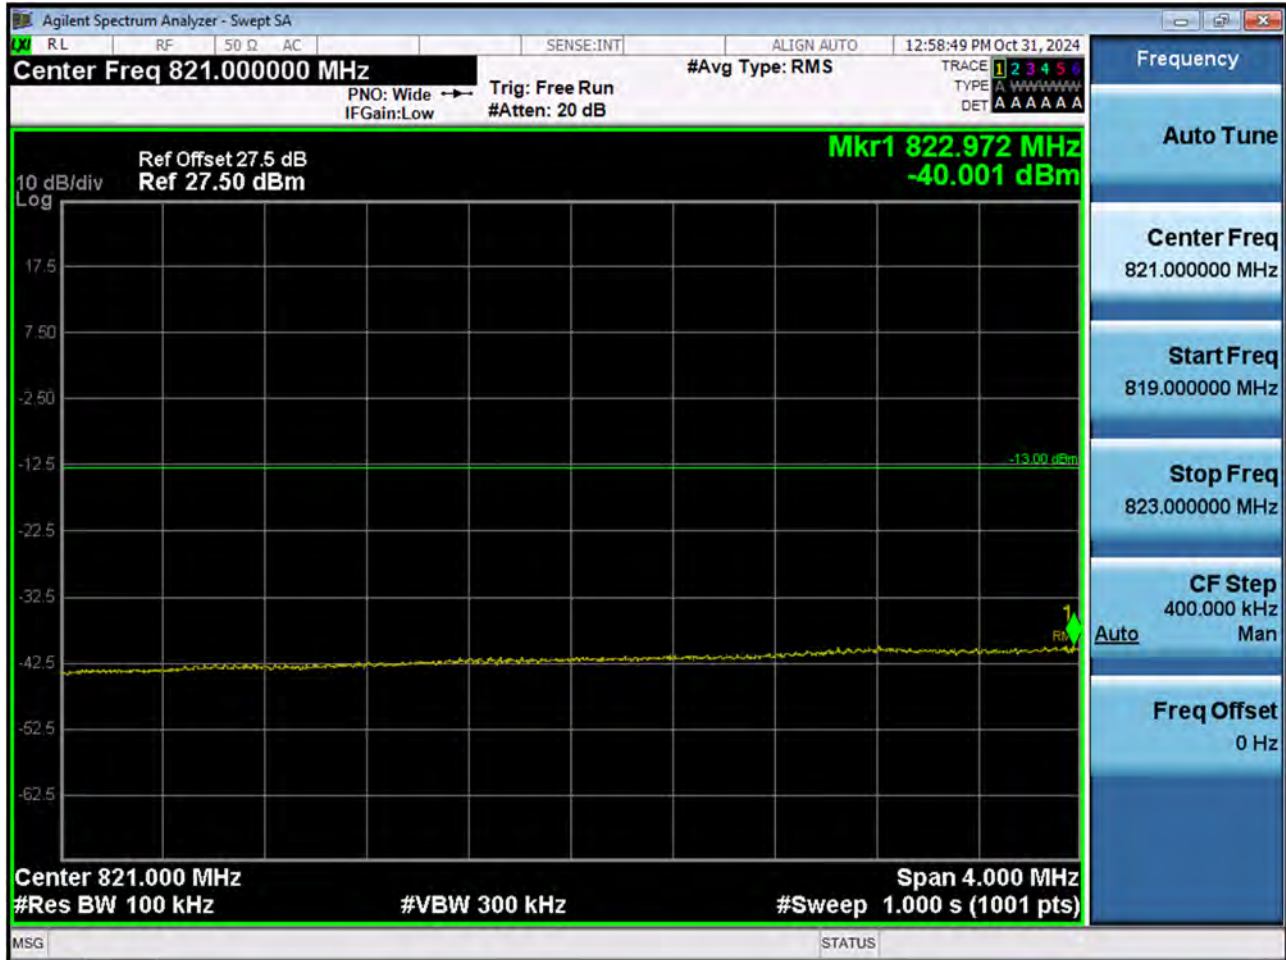


BAND 26. Upper Band Edge Plot (15 M BW Ch.26965 QPSK_RB1_Offset 74)




BAND 26. Upper Band Edge Plot (15 M BW Ch.26965 QPSK_RB75_Offset 0)




BAND 26. Upper Extended Band Edge Plot (15 M BW Ch.26965 QPSK_RB75_0)

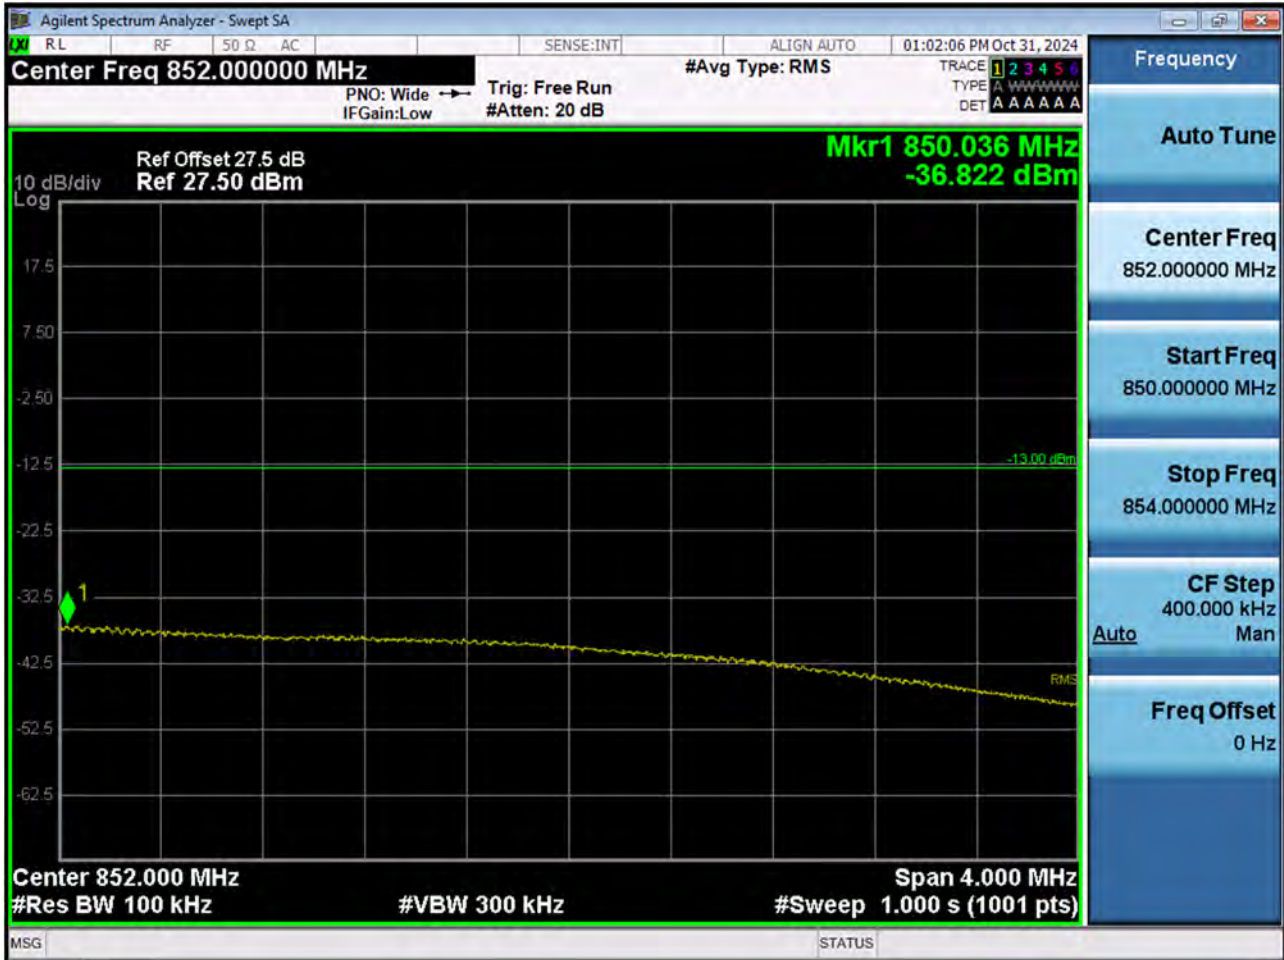


BAND 26. Conducted Spurious Plot (26797ch_1.4 MHz_QPSK_RB 1_0)

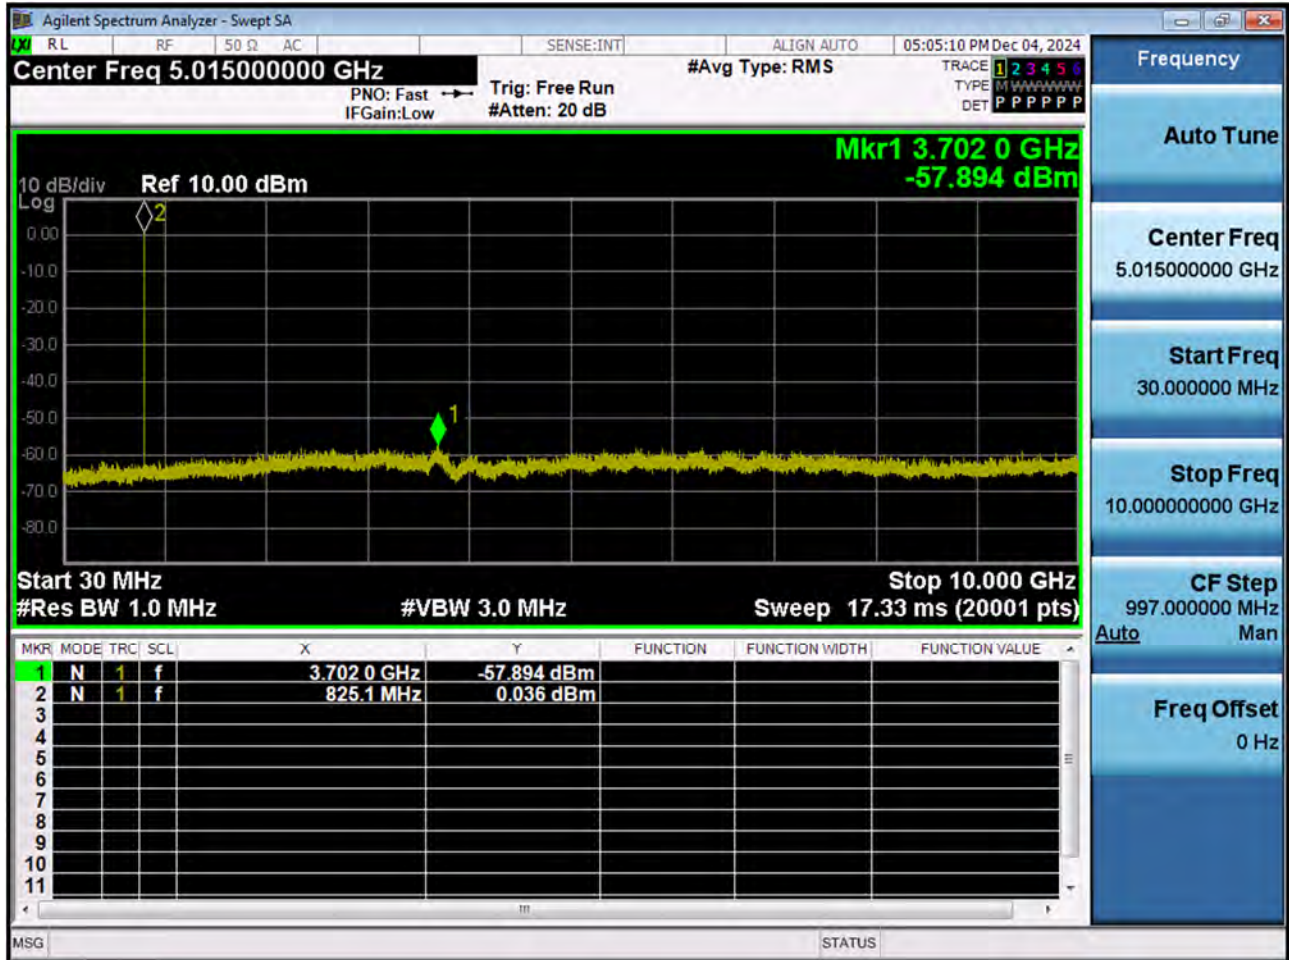


BAND 26. Conducted Spurious Plot (26915ch_1.4 MHz_QPSK_RB 1_0)

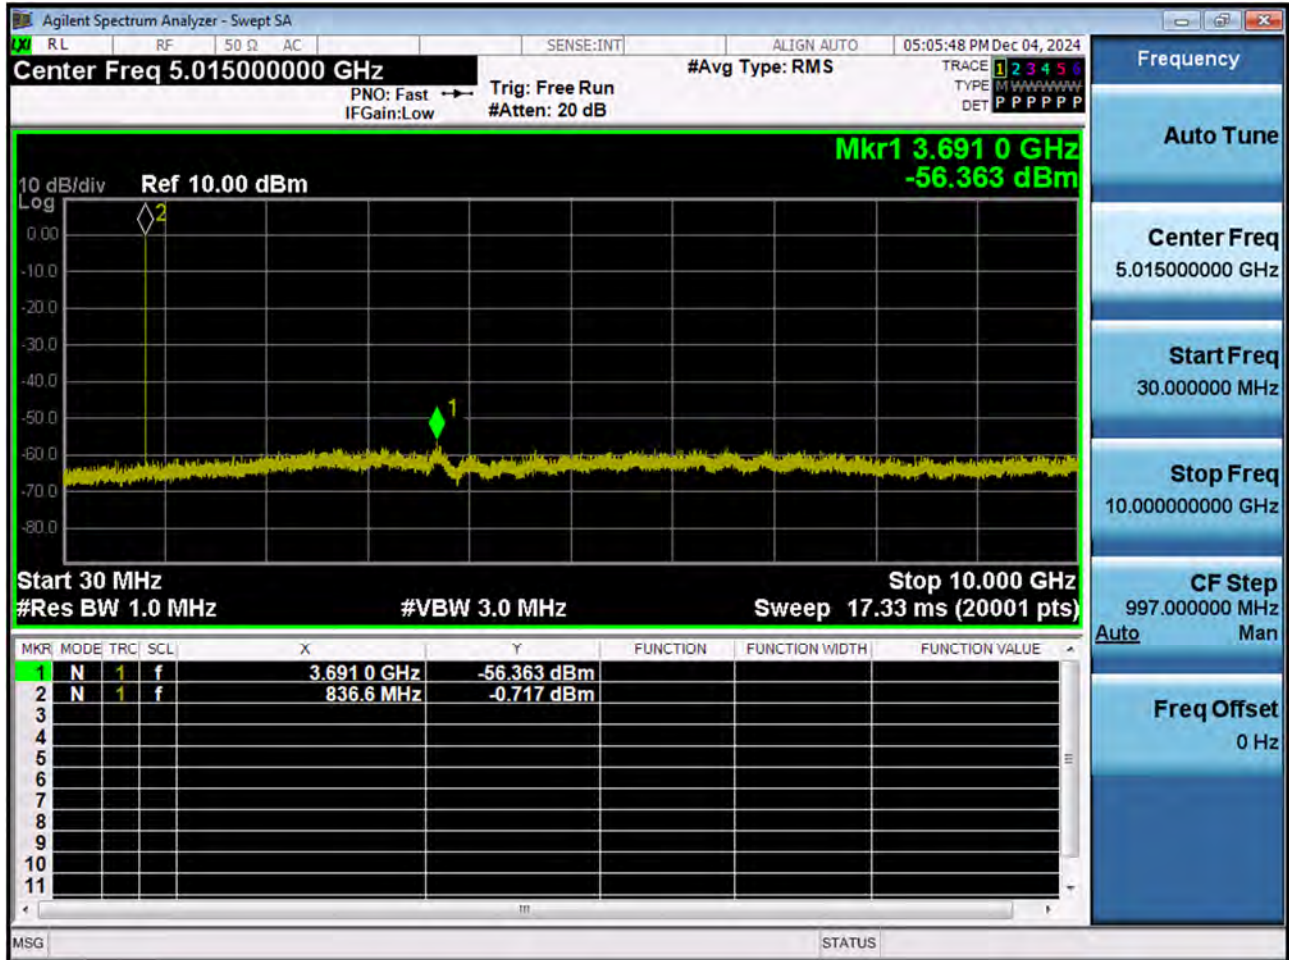


BAND 26. Conducted Spurious Plot (27033ch_1.4 MHz_QPSK_RB 1_0)

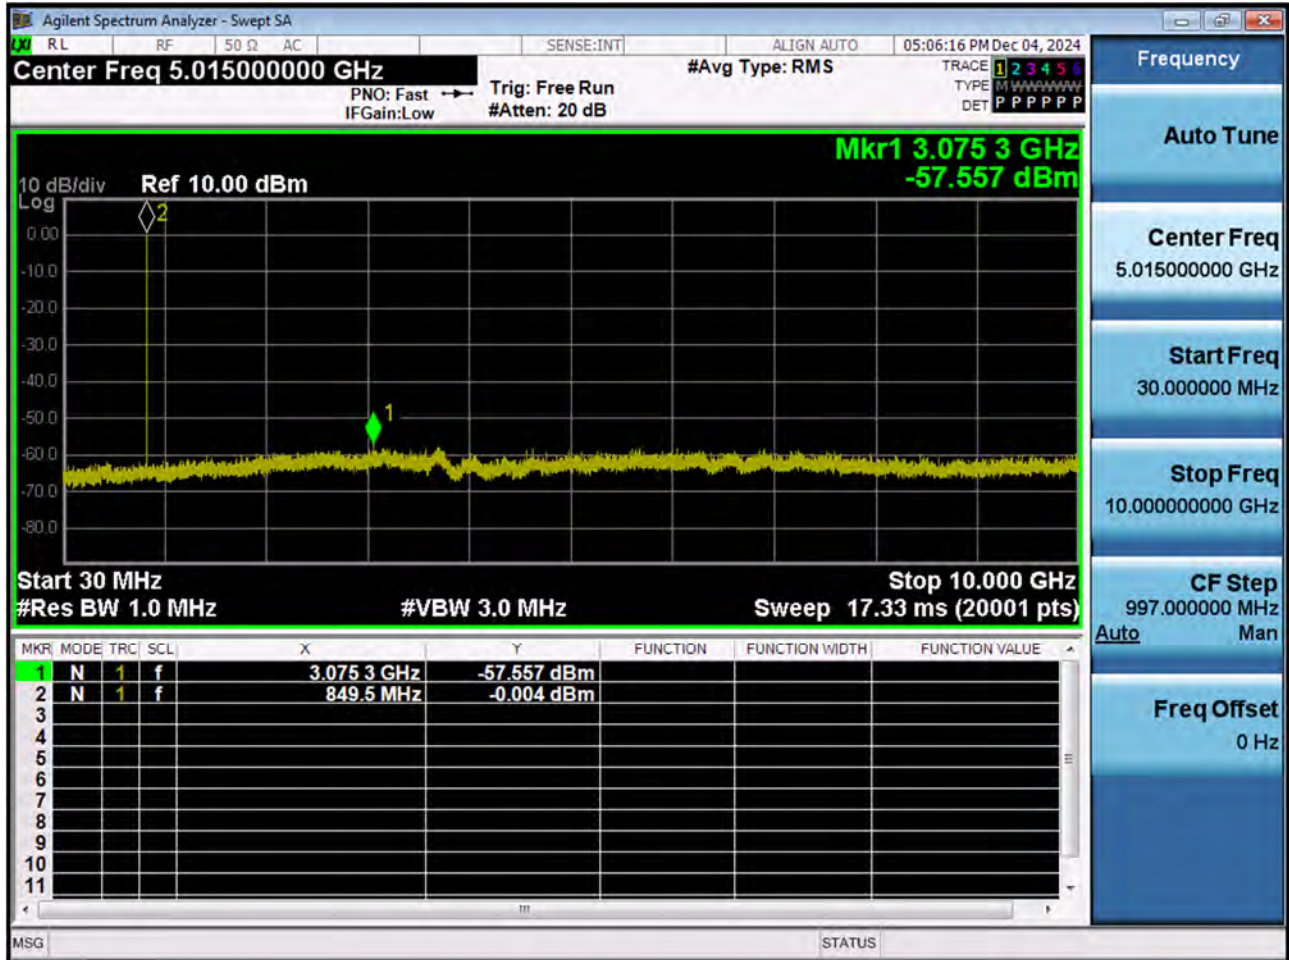


BAND 26. Conducted Spurious Plot (26805ch_3 MHz_QPSK_RB 1_0)

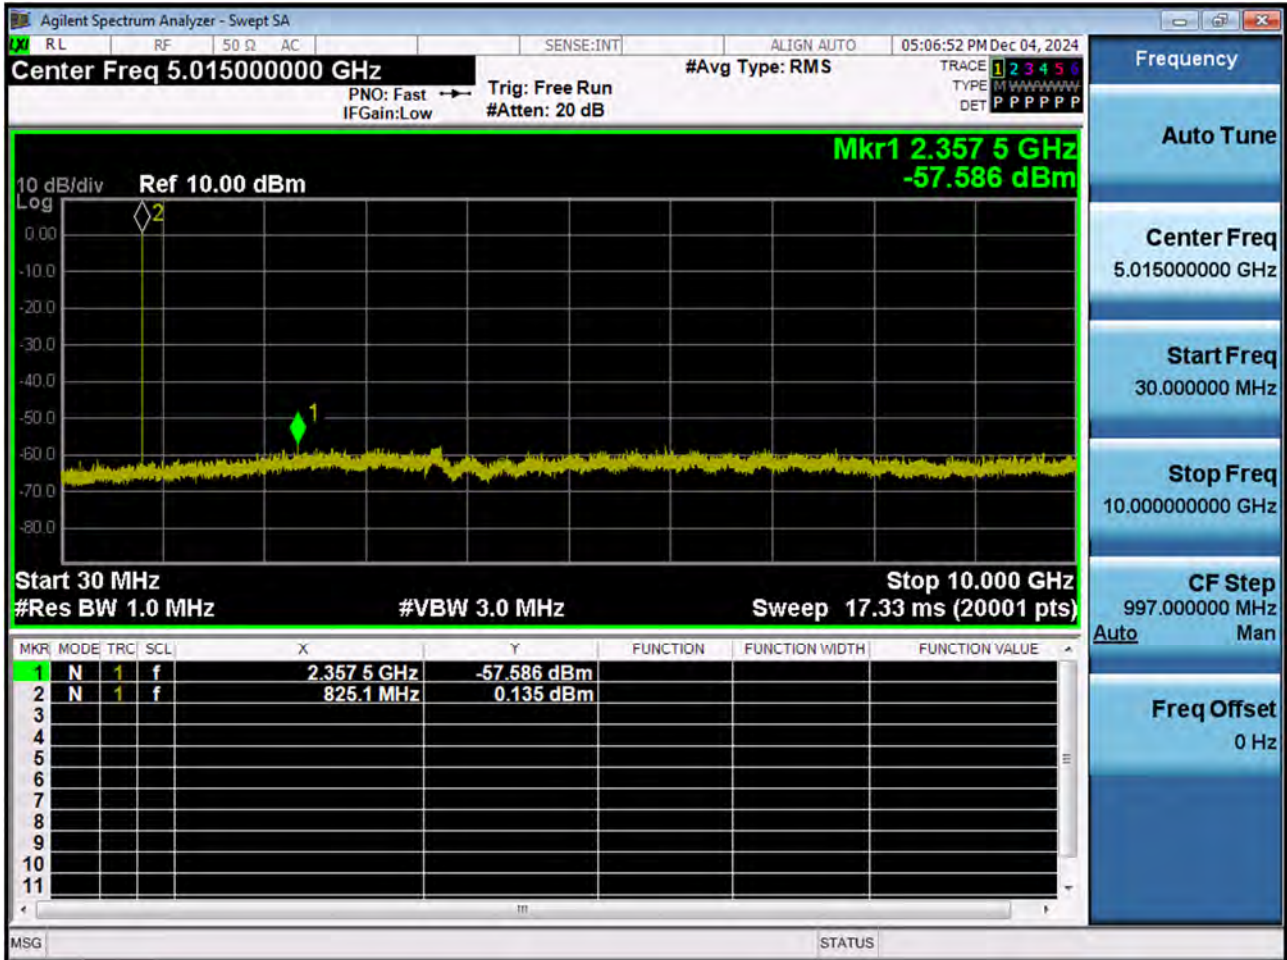


BAND 26. Conducted Spurious Plot (26915ch_3 MHz_QPSK_RB 1_0)

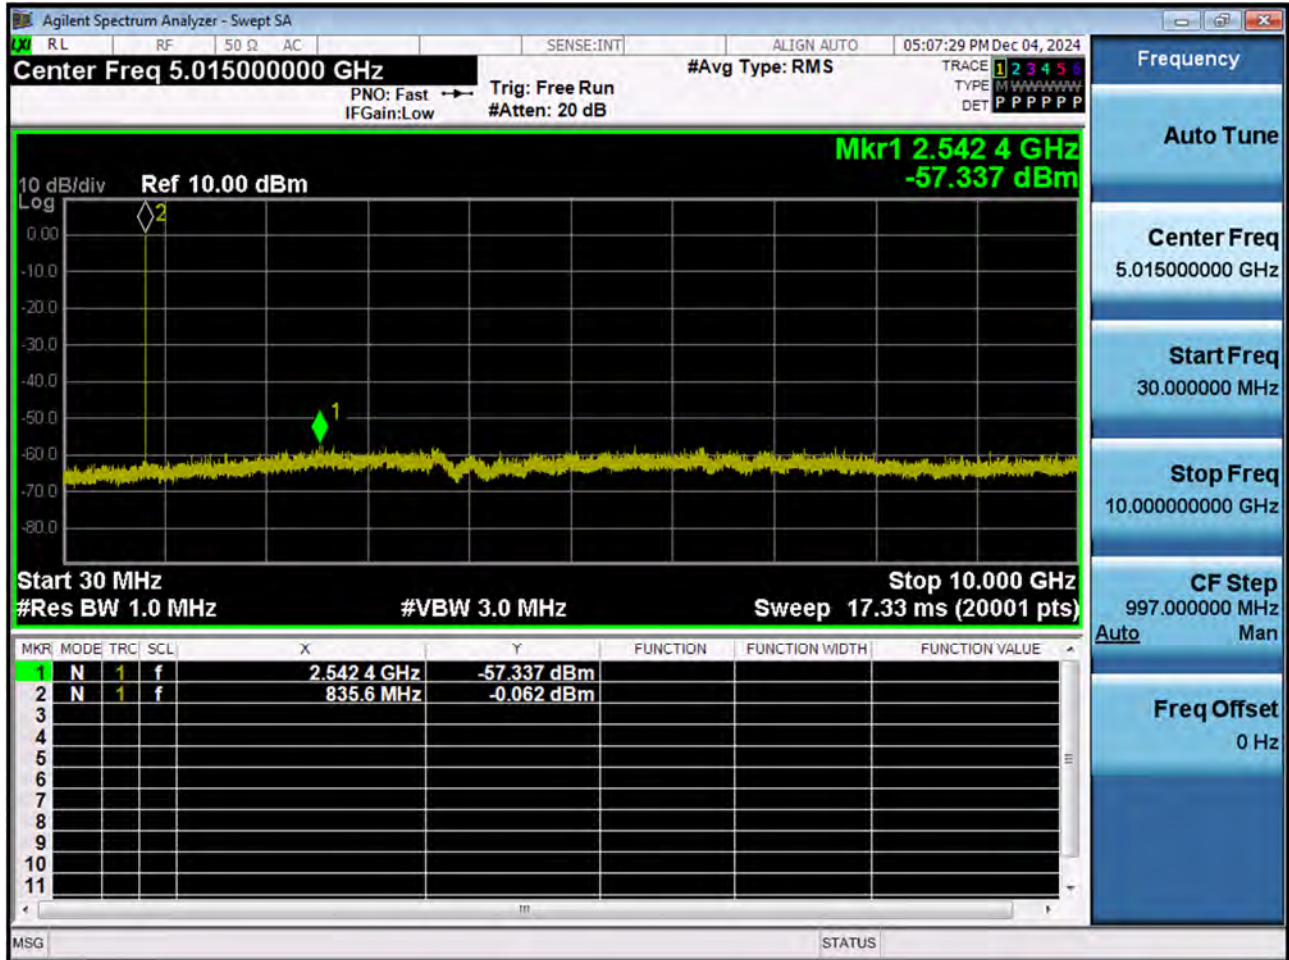


BAND 26. Conducted Spurious Plot (27025ch_3 MHz_QPSK_RB 1_0)

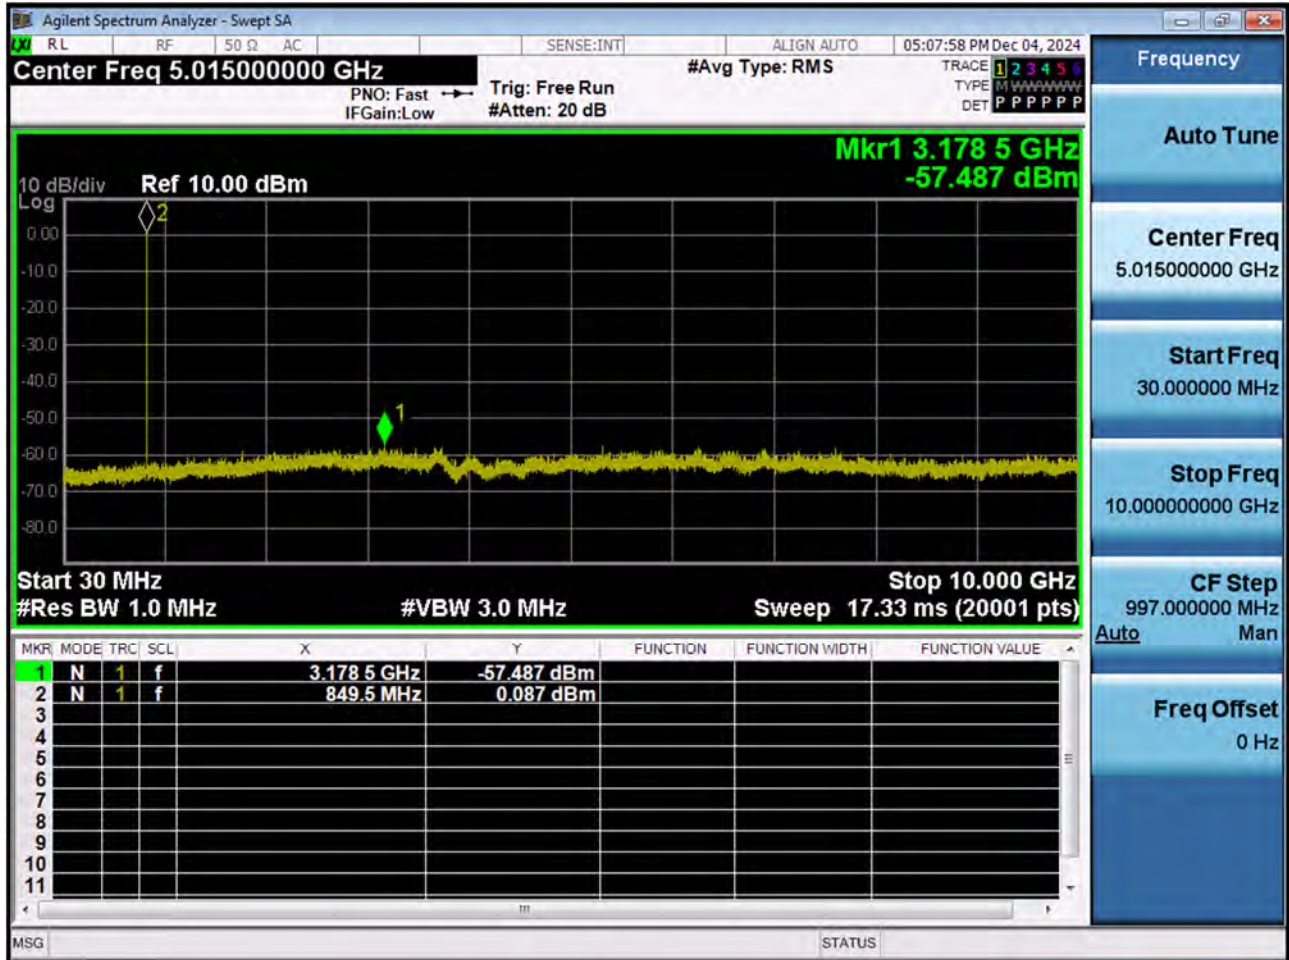


BAND 26. Conducted Spurious Plot (26815ch_5 MHz_QPSK_RB 1_0)

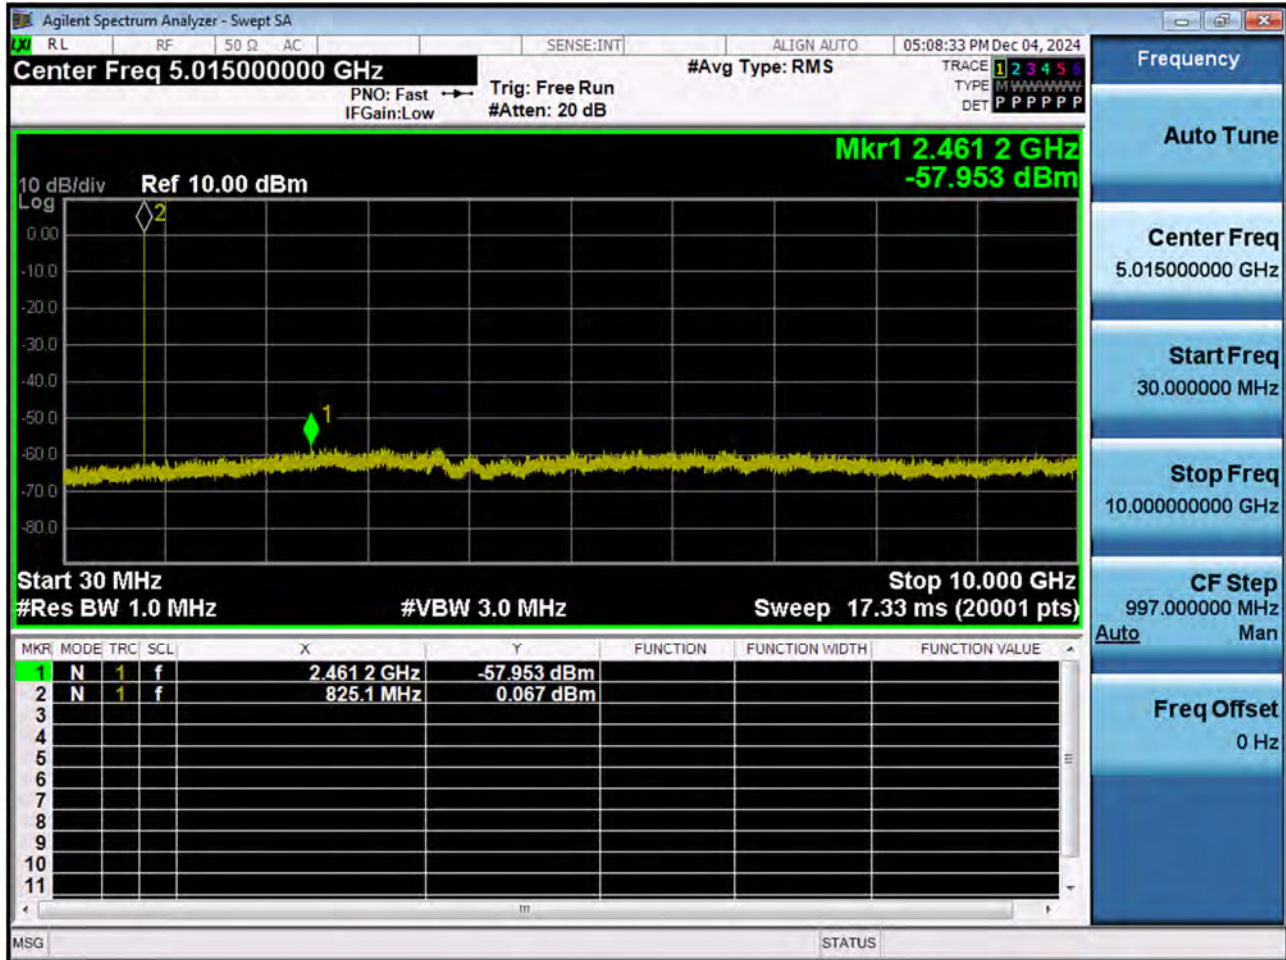


BAND 26. Conducted Spurious Plot (26915ch_5 MHz_QPSK_RB 1_0)

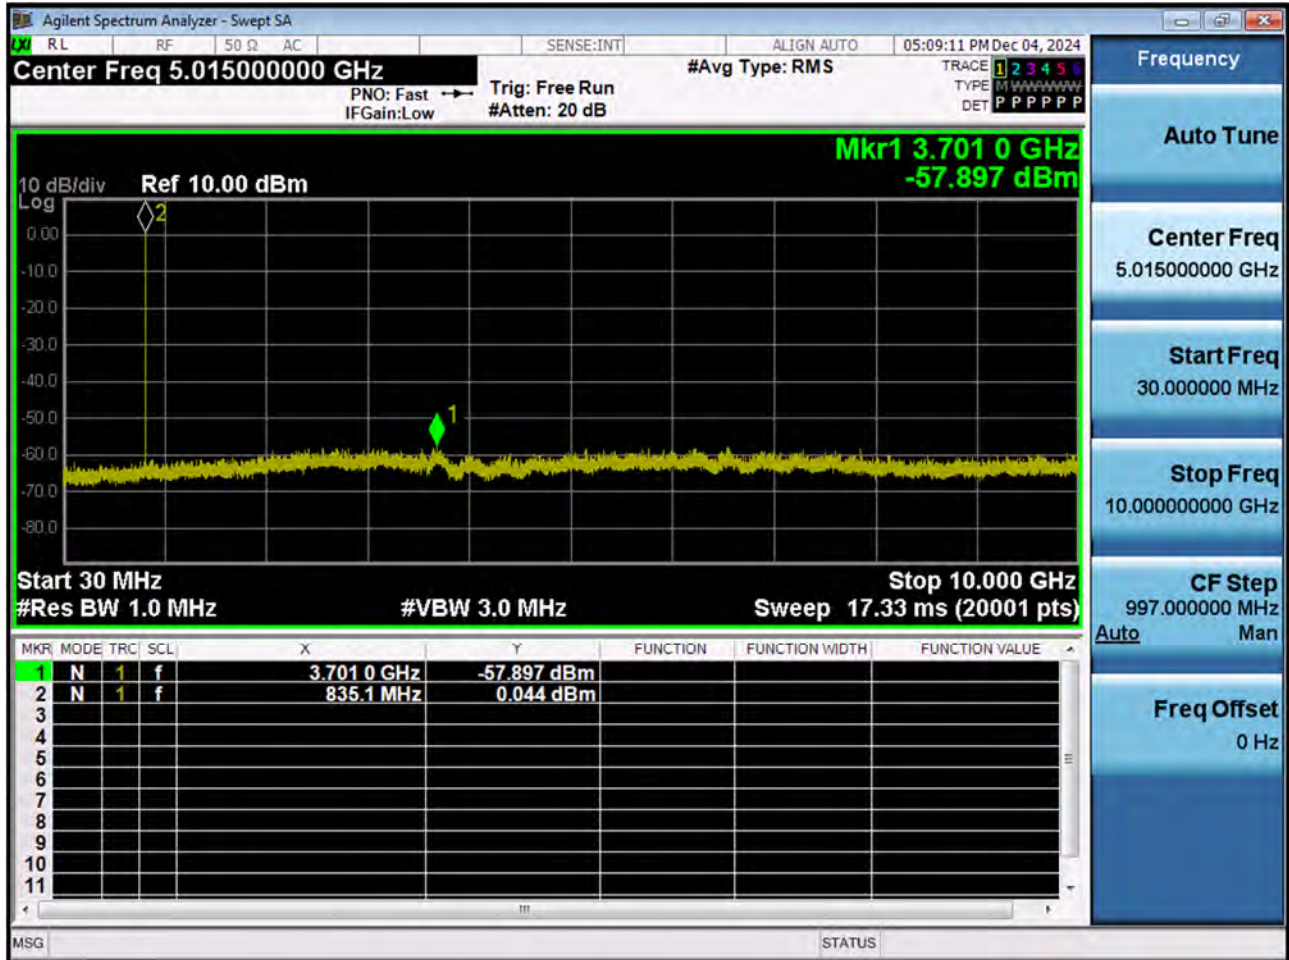


BAND 26. Conducted Spurious Plot (27015ch_5 MHz_QPSK_RB 1_0)

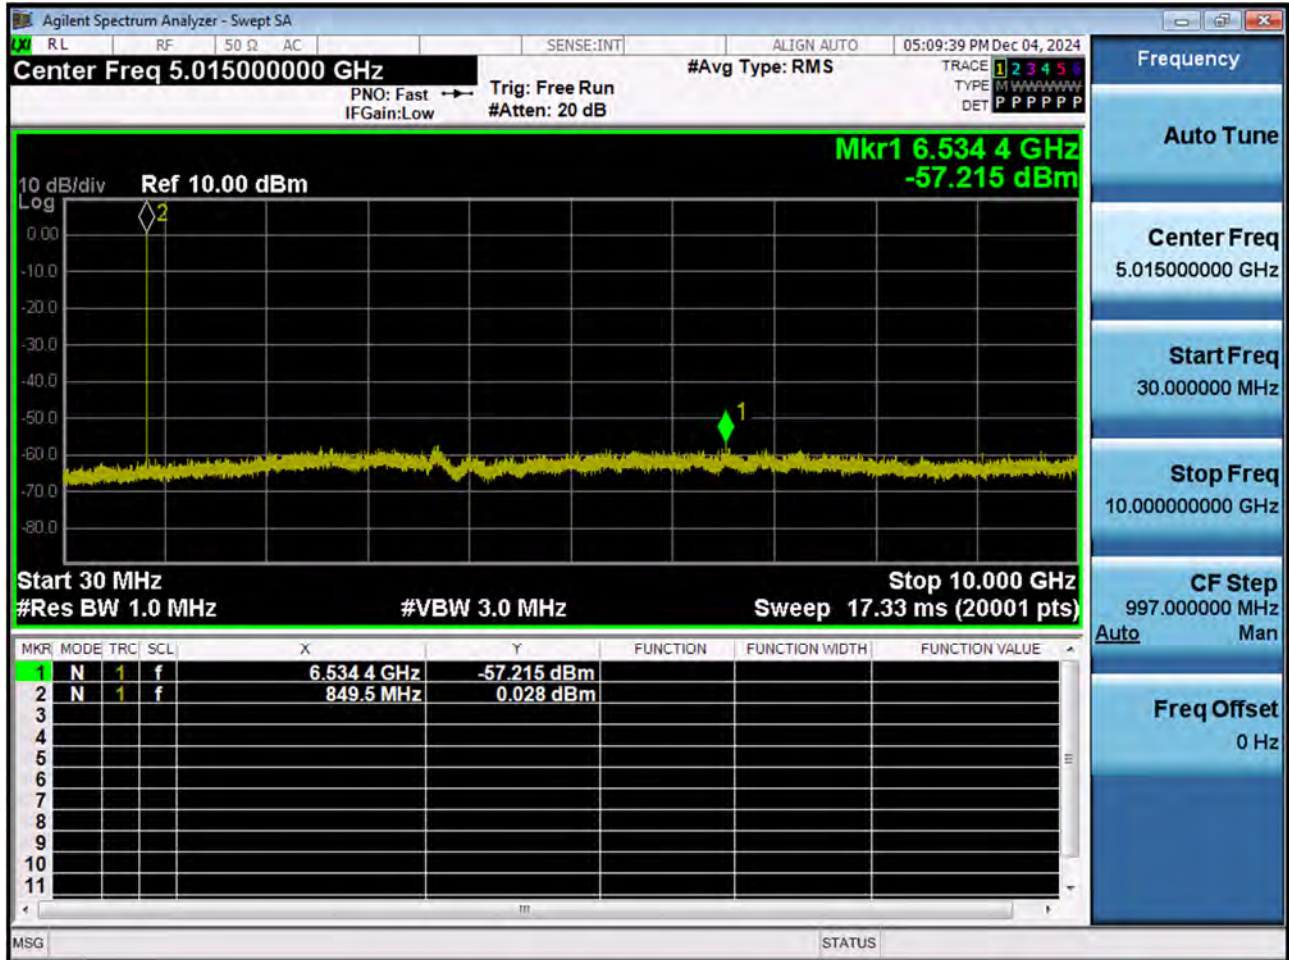


BAND 26. Conducted Spurious Plot (26840ch_10 MHz_QPSK_RB 1_0)

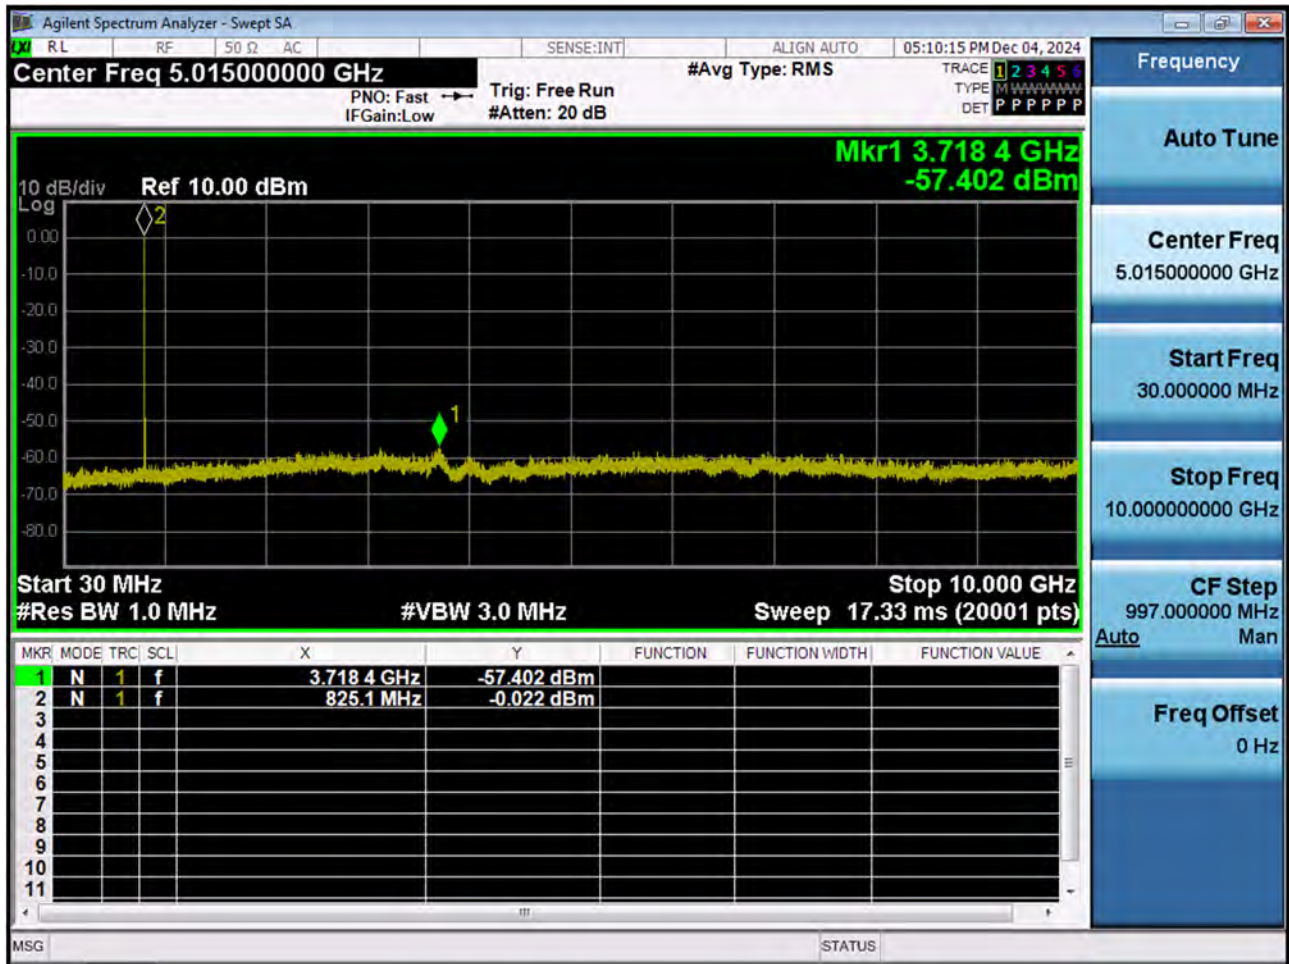


BAND 26. Conducted Spurious Plot (26915ch_10 MHz_QPSK_RB 1_0)

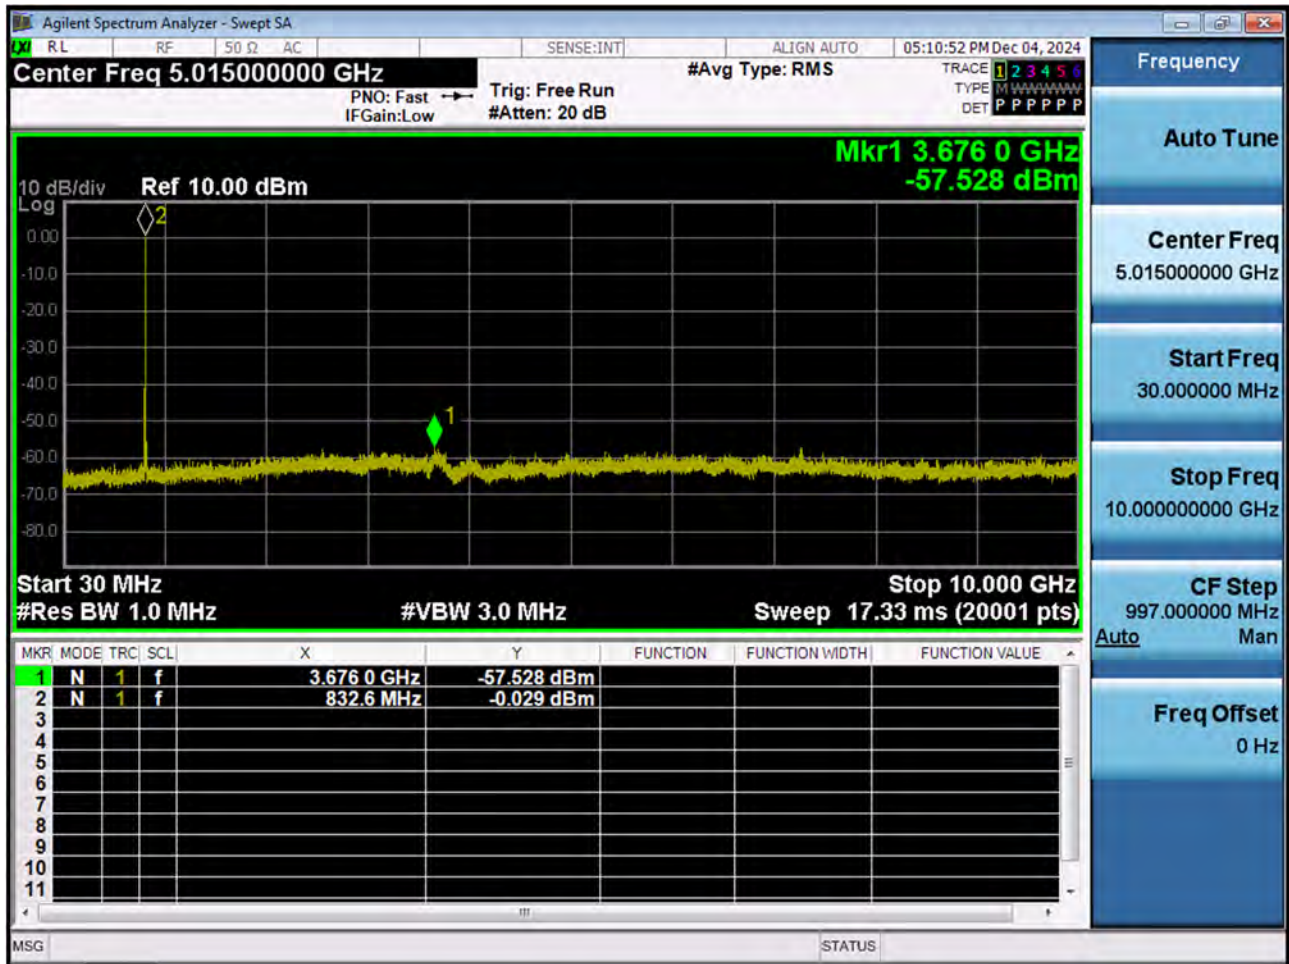


BAND 26. Conducted Spurious Plot (26990ch_10 MHz_QPSK_RB 1_0)

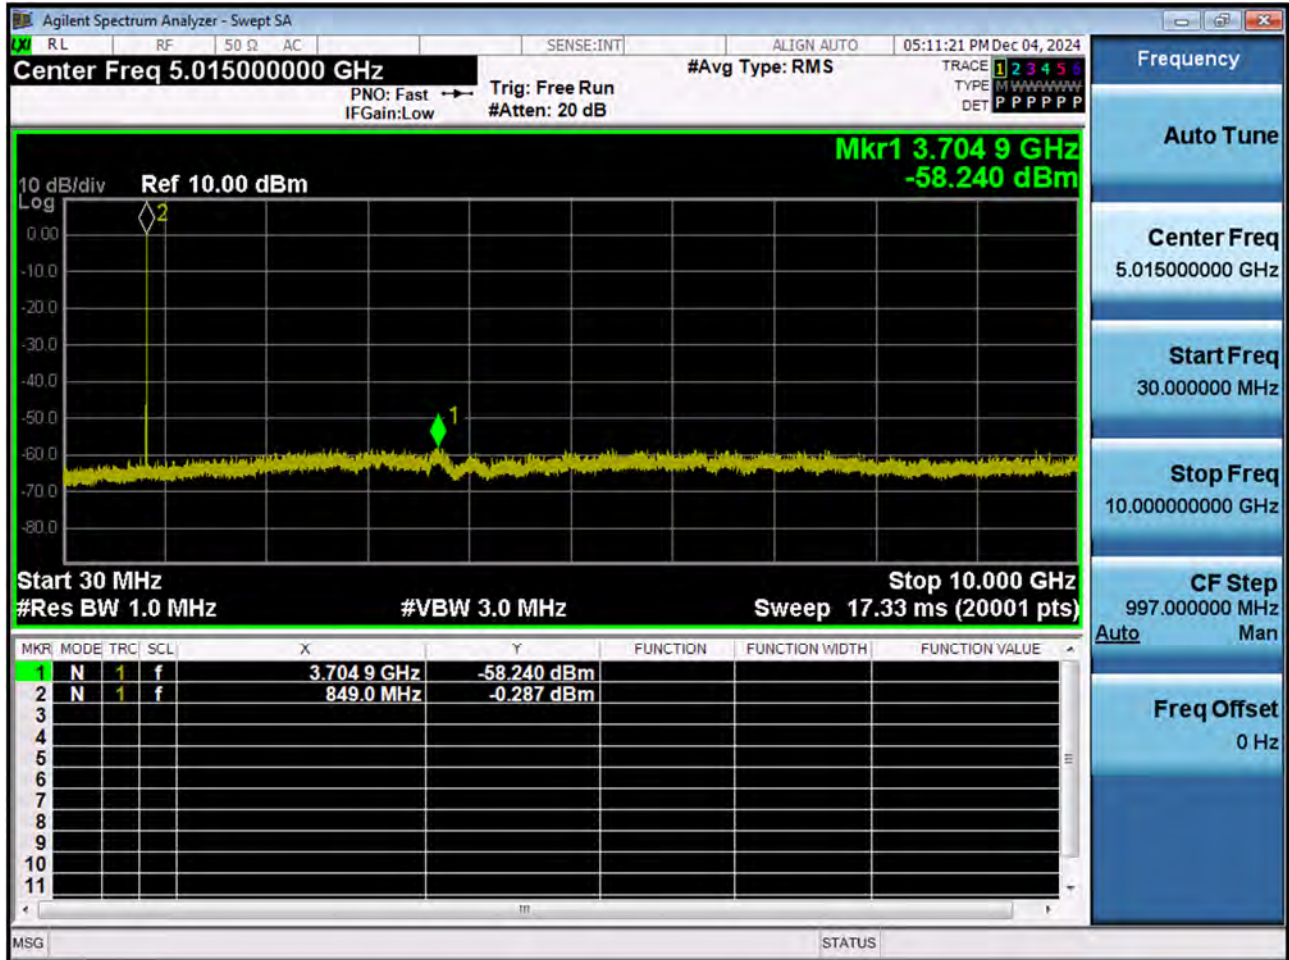


BAND 26. Conducted Spurious (26865ch_15 MHz_QPSK_RB 1_0)

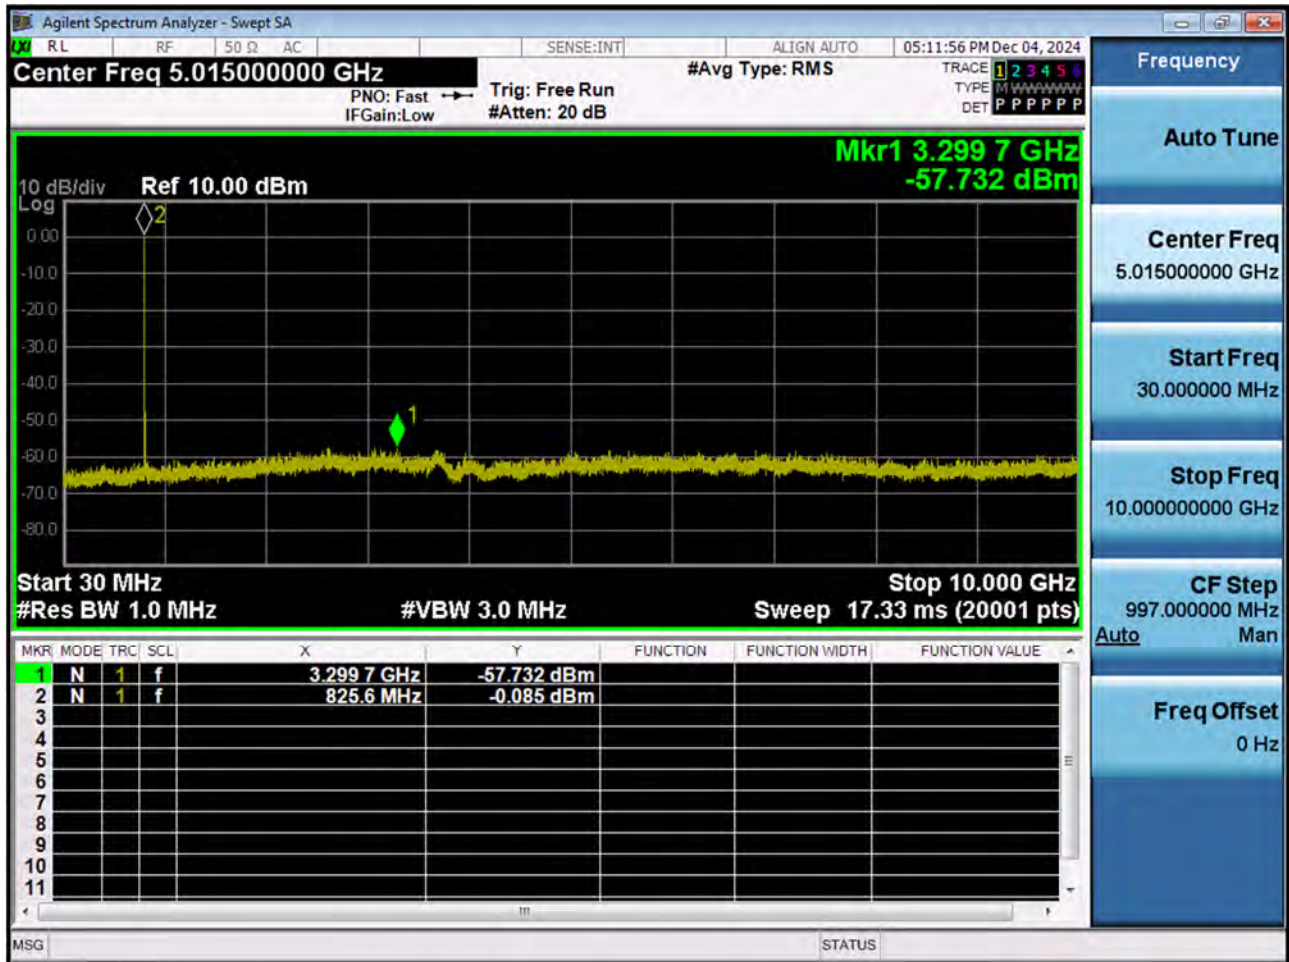

BAND 26. Conducted Spurious (26915ch_15 MHz_QPSK_RB 1_0)

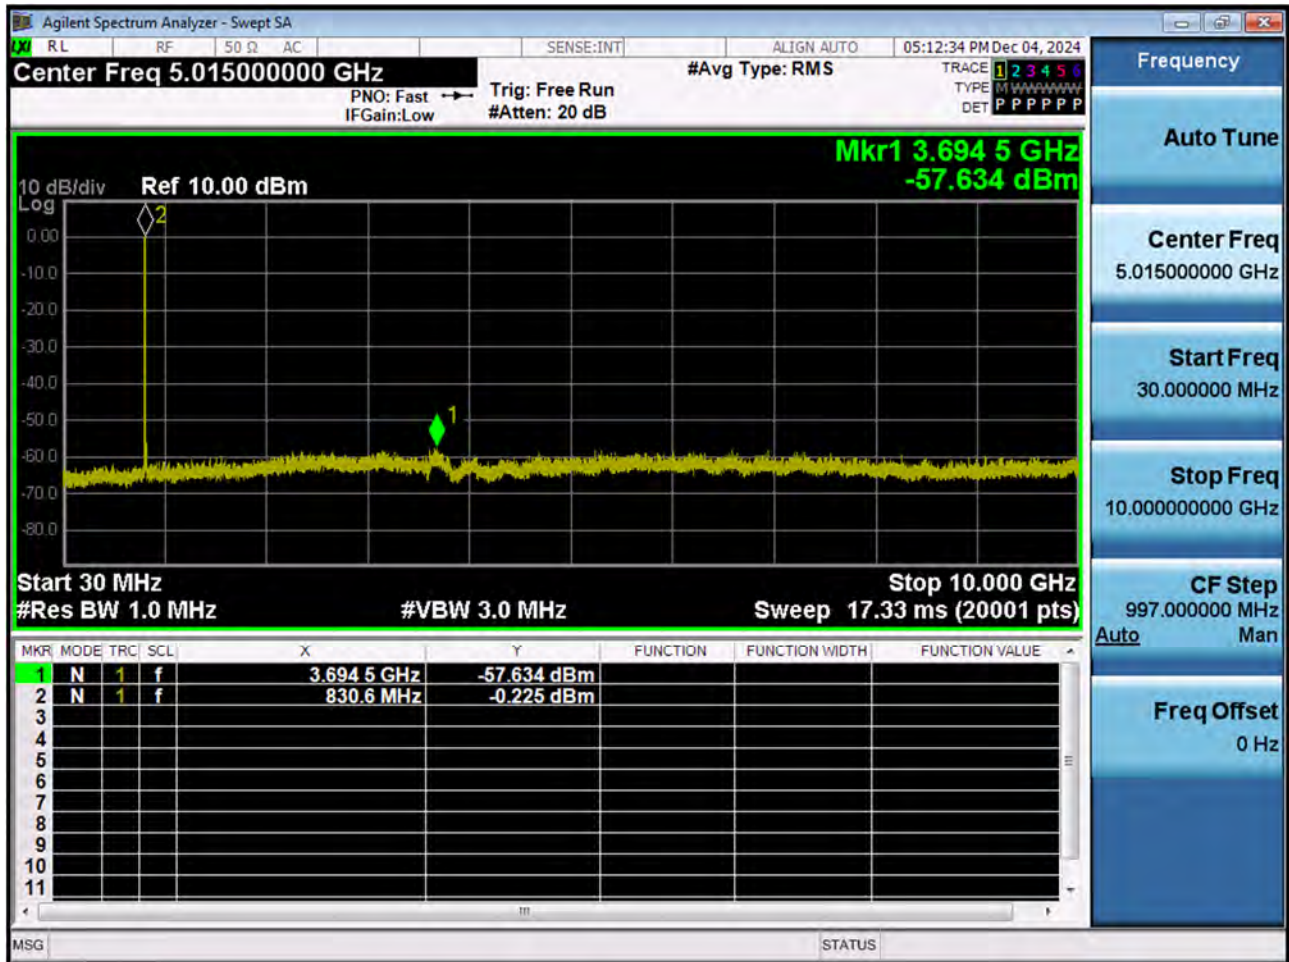

BAND 26. Conducted Spurious (26965ch_15 MHz_QPSK_RB 1_0)

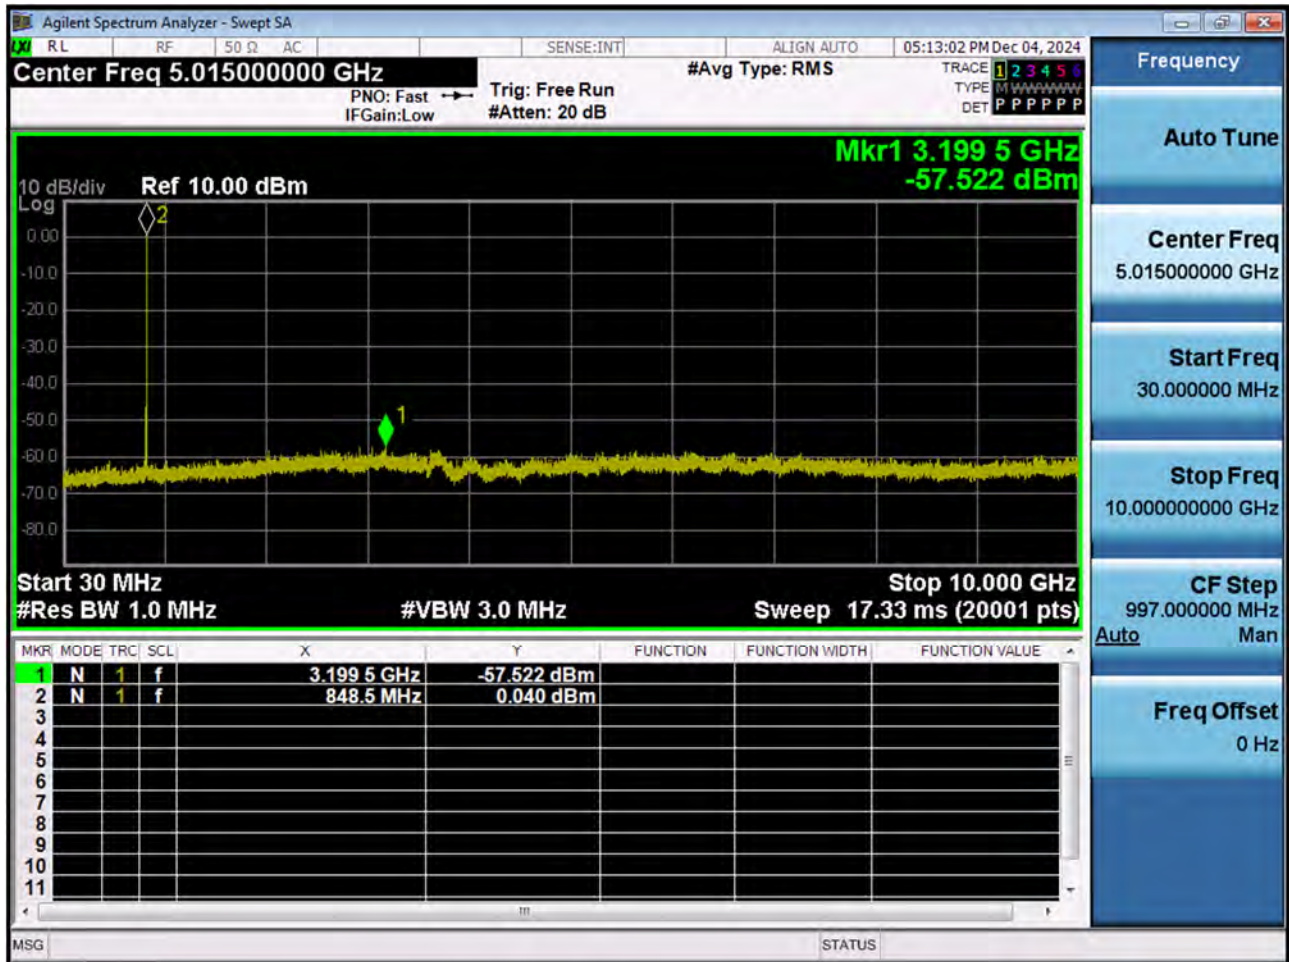

10. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

| No. | Description |
|-----|---------------------|
| 1 | HCT-RF-2412-FC035-P |