

## 2G


### 07 Conducted output power

| Band            | Channel | Frequency (MHz) | Power (dBm) | high Limit (dBm) | Verdict |
|-----------------|---------|-----------------|-------------|------------------|---------|
| GPRS1900 1 Slot | 512     | 1850.2          | 29.44       | 37               | PASS    |
| GPRS1900 1 Slot | 661     | 1880            | 29.39       | 37               | PASS    |
| GPRS1900 1 Slot | 810     | 1909.8          | 29.09       | 37               | PASS    |
| GPRS1900 2 Slot | 512     | 1850.2          | 27.35       | 37               | PASS    |
| GPRS1900 2 Slot | 661     | 1880            | 27.10       | 37               | PASS    |
| GPRS1900 2 Slot | 810     | 1909.8          | 26.80       | 37               | PASS    |
| GPRS1900 3 Slot | 512     | 1850.2          | 25.86       | 37               | PASS    |
| GPRS1900 3 Slot | 661     | 1880            | 25.64       | 37               | PASS    |
| GPRS1900 3 Slot | 810     | 1909.8          | 25.29       | 37               | PASS    |
| GPRS1900 4 Slot | 512     | 1850.2          | 23.70       | 37               | PASS    |
| GPRS1900 4 Slot | 661     | 1880            | 23.50       | 37               | PASS    |
| GPRS1900 4 Slot | 810     | 1909.8          | 23.16       | 37               | PASS    |
| GPRS850 1 Slot  | 128     | 824.2           | 32.46       | 37               | PASS    |
| GPRS850 1 Slot  | 189     | 836.4           | 32.55       | 37               | PASS    |
| GPRS850 1 Slot  | 251     | 848.8           | 32.35       | 37               | PASS    |
| GPRS850 2 Slot  | 128     | 824.2           | 30.38       | 37               | PASS    |
| GPRS850 2 Slot  | 189     | 836.4           | 30.42       | 37               | PASS    |
| GPRS850 2 Slot  | 251     | 848.8           | 30.23       | 37               | PASS    |
| GPRS850 3 Slot  | 128     | 824.2           | 28.51       | 37               | PASS    |
| GPRS850 3 Slot  | 189     | 836.4           | 28.54       | 37               | PASS    |
| GPRS850 3 Slot  | 251     | 848.8           | 28.38       | 37               | PASS    |
| GPRS850 4 Slot  | 128     | 824.2           | 26.30       | 37               | PASS    |
| GPRS850 4 Slot  | 189     | 836.4           | 26.33       | 37               | PASS    |
| GPRS850 4 Slot  | 251     | 848.8           | 26.20       | 37               | PASS    |


## 09 Peak-to-Average Ratio

| Band     | Channel | Frequency (MHz) | Result (dB) | high Limit (dB) | Verdict |
|----------|---------|-----------------|-------------|-----------------|---------|
| GPRS1900 | 512     | 1850.2          | 2.66889016  | 13.00           | PASS    |
| GPRS1900 | 661     | 1880            | 2.663328541 | 13.00           | PASS    |
| GPRS1900 | 810     | 1909.8          | 2.679032258 | 13.00           | PASS    |
| GPRS850  | 128     | 824.2           | 2.675564598 | 13.00           | PASS    |
| GPRS850  | 189     | 836.4           | 2.677164336 | 13.00           | PASS    |
| GPRS850  | 251     | 848.8           | 2.648883301 | 13.00           | PASS    |


GPRS1900 Channel=512

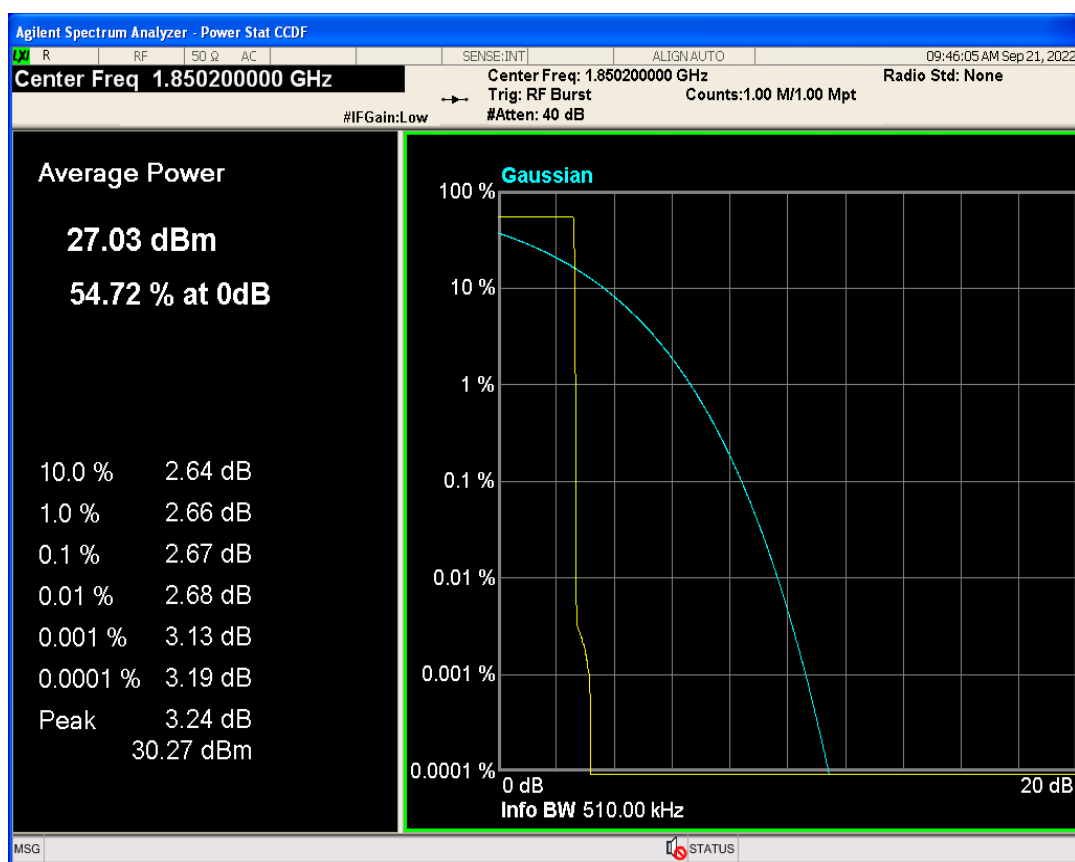


GPRS1900 Channel=810

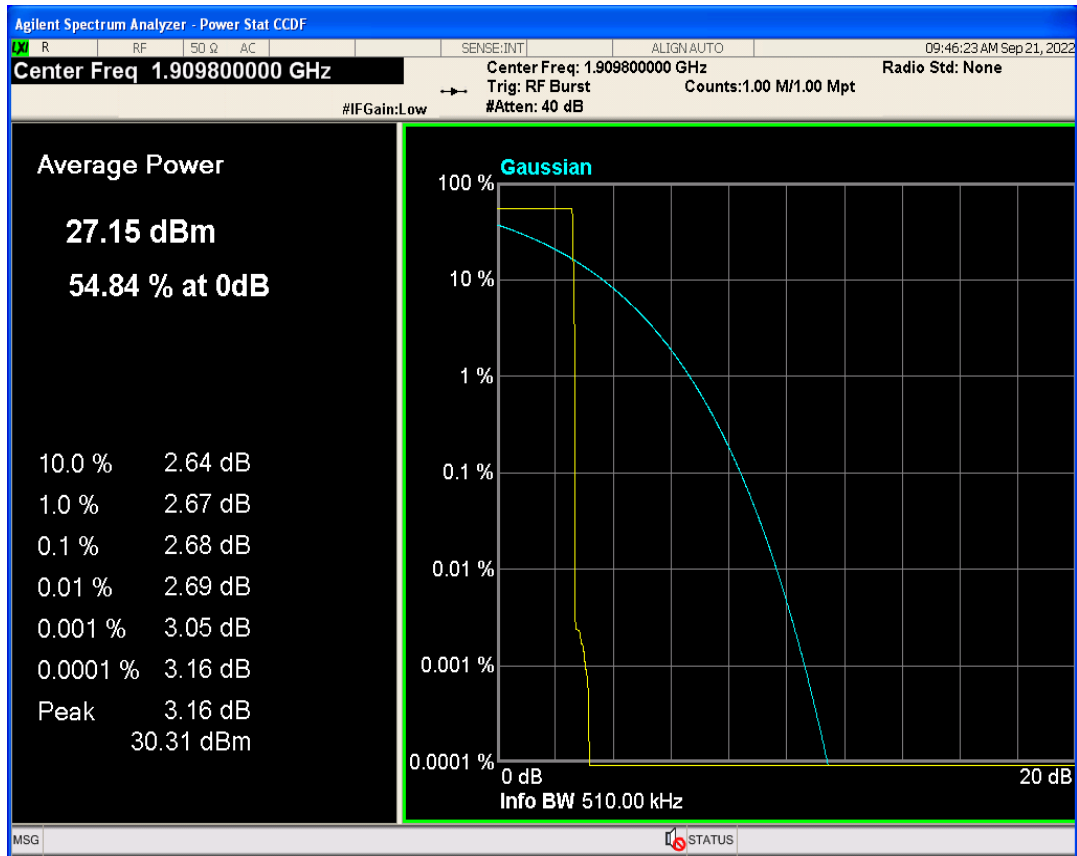


GPRS1900 Channel=661

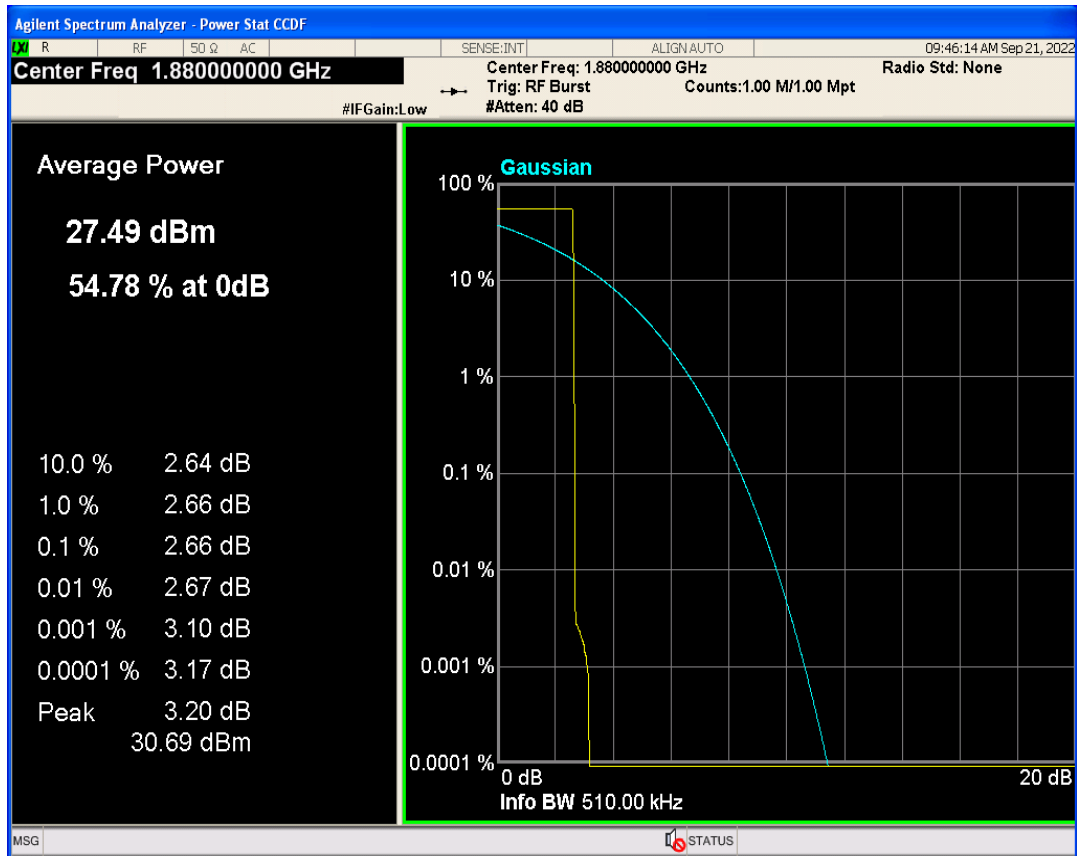


GPRS850 Channel=189

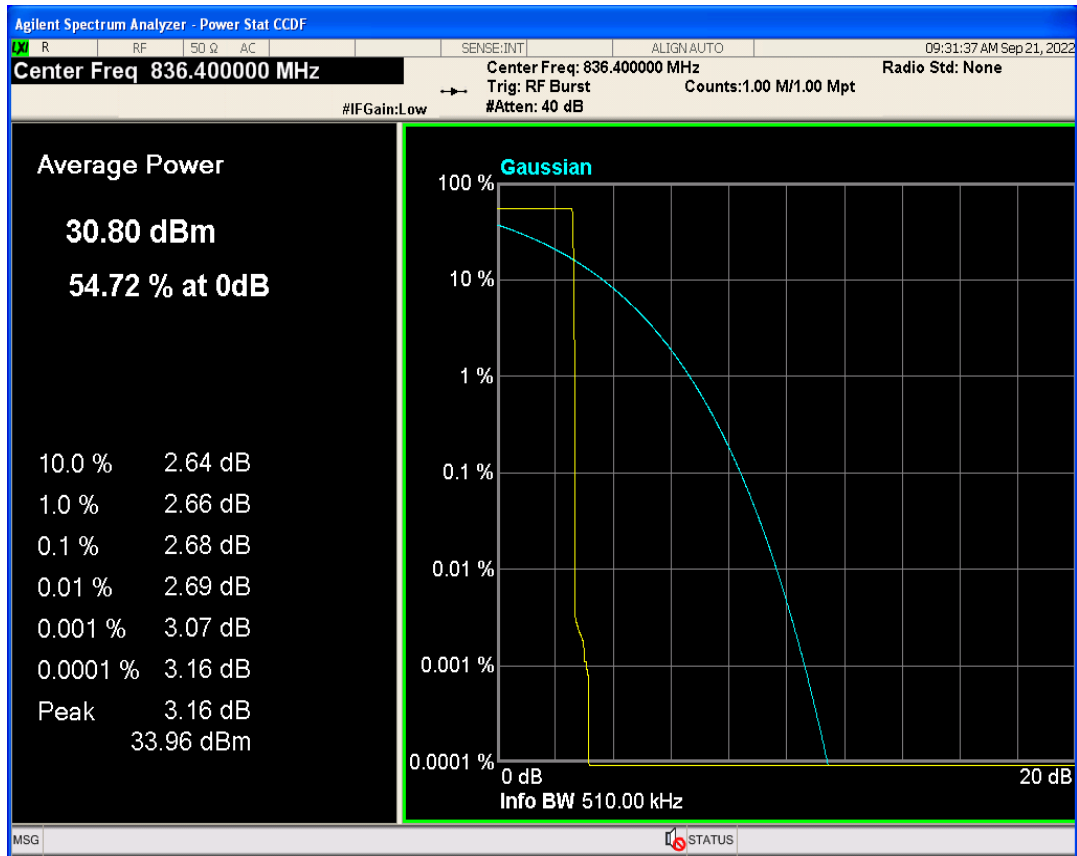

GPRS850 Channel=128

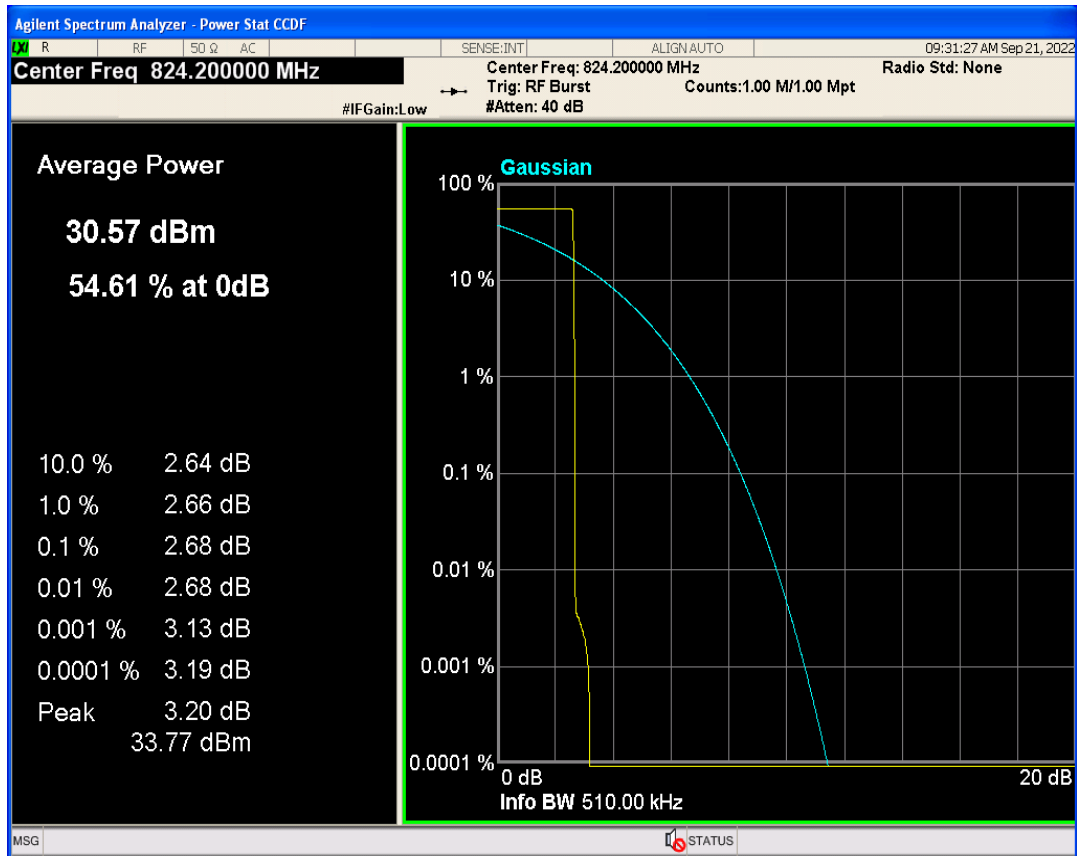


GPRS850 Channel=251

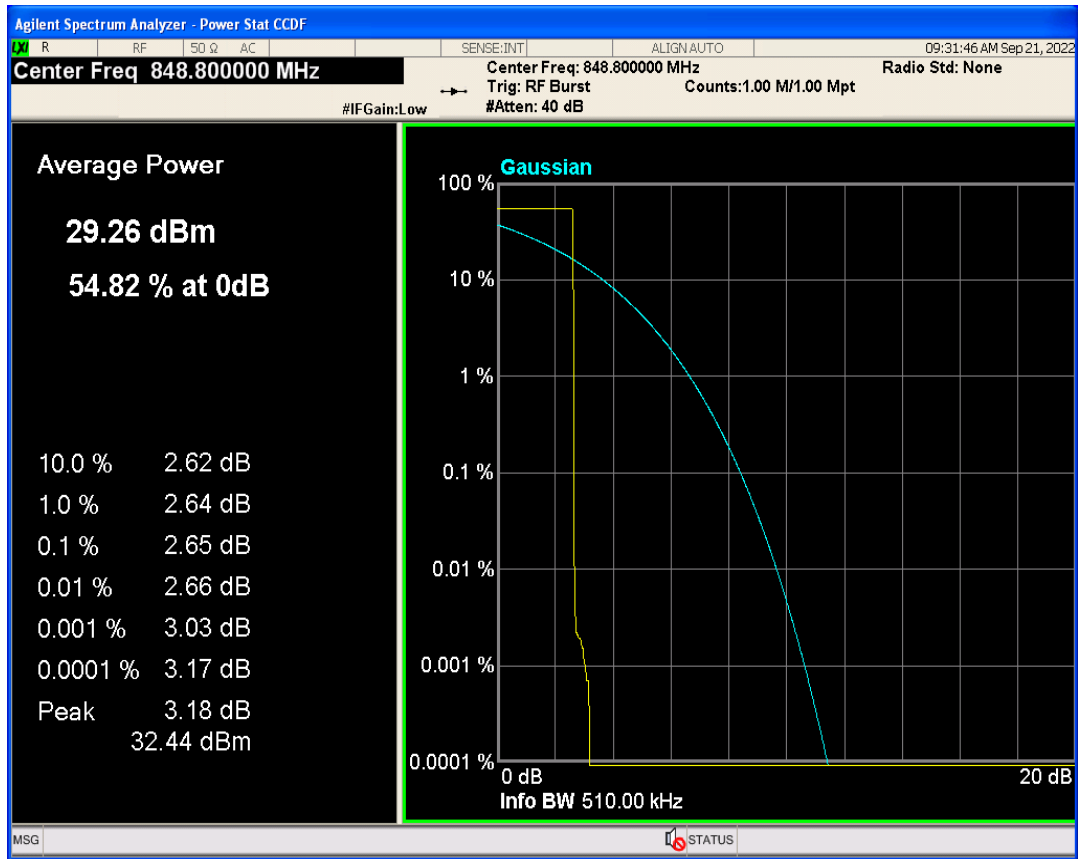


## 10 Occupied bandwidth

| Band     | Channel | Frequency (MHz) | 99% OBW (kHz) | -26dB EBW (kHz) | Verdict |
|----------|---------|-----------------|---------------|-----------------|---------|
| GPRS1900 | 512     | 1850.2          | 239.669       | 312.409         | PASS    |
| GPRS1900 | 661     | 1880            | 243.881       | 318.243         | PASS    |
| GPRS1900 | 810     | 1909.8          | 236.593       | 311.100         | PASS    |
| GPRS850  | 128     | 824.2           | 246.391       | 320.625         | PASS    |
| GPRS850  | 189     | 836.4           | 242.027       | 308.779         | PASS    |
| GPRS850  | 251     | 848.8           | 242.107       | 322.715         | PASS    |


GPRS1900 Channel=512

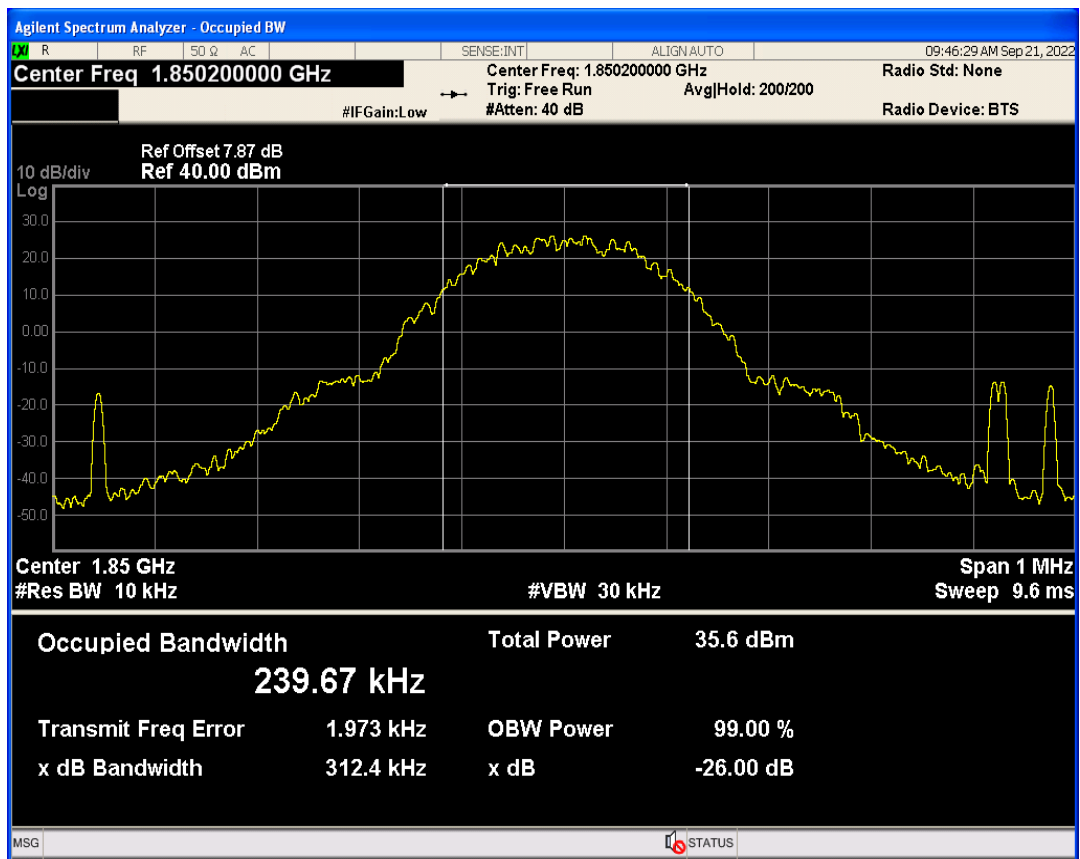


GPRS1900 Channel=810

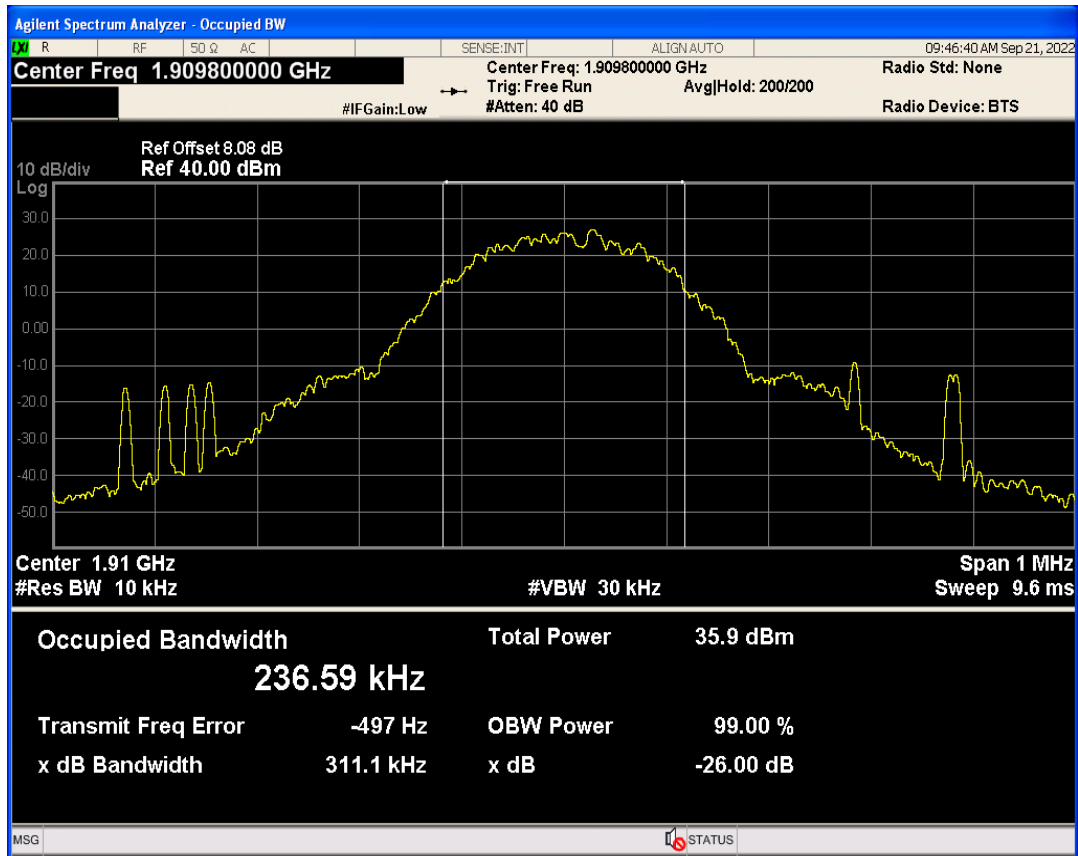


GPRS1900 Channel=661

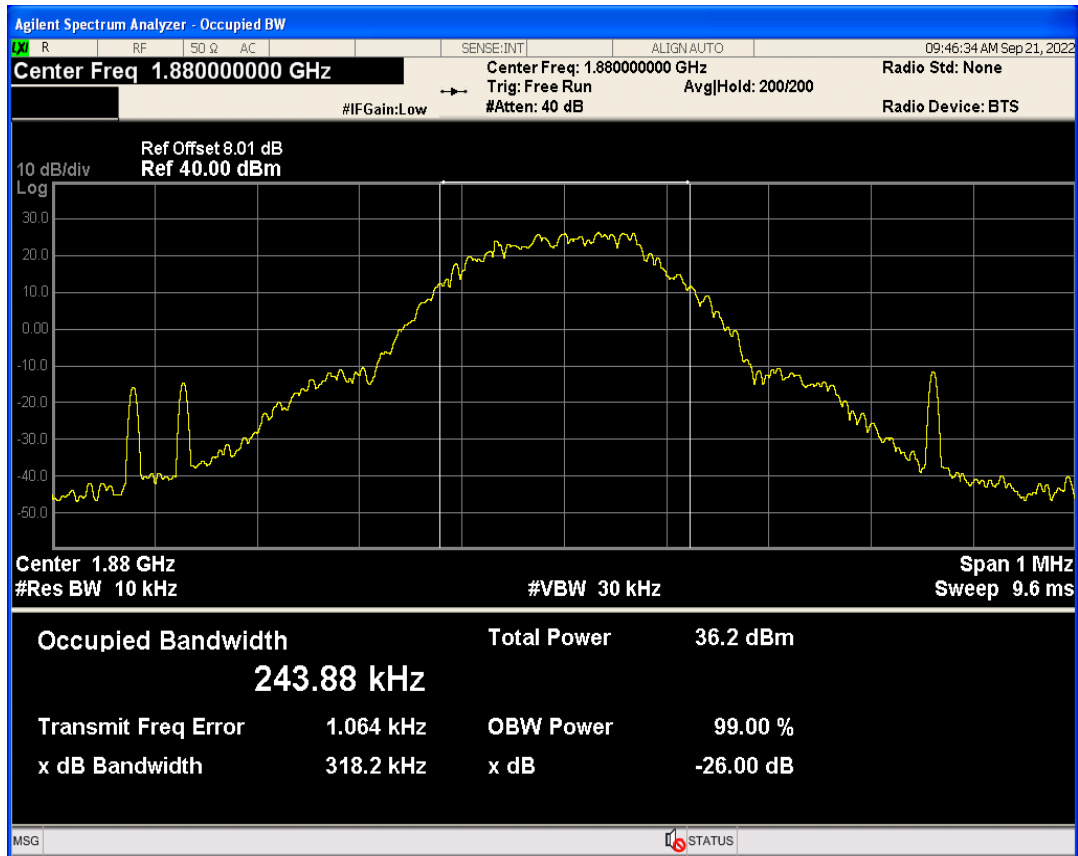


GPRS850 Channel=189

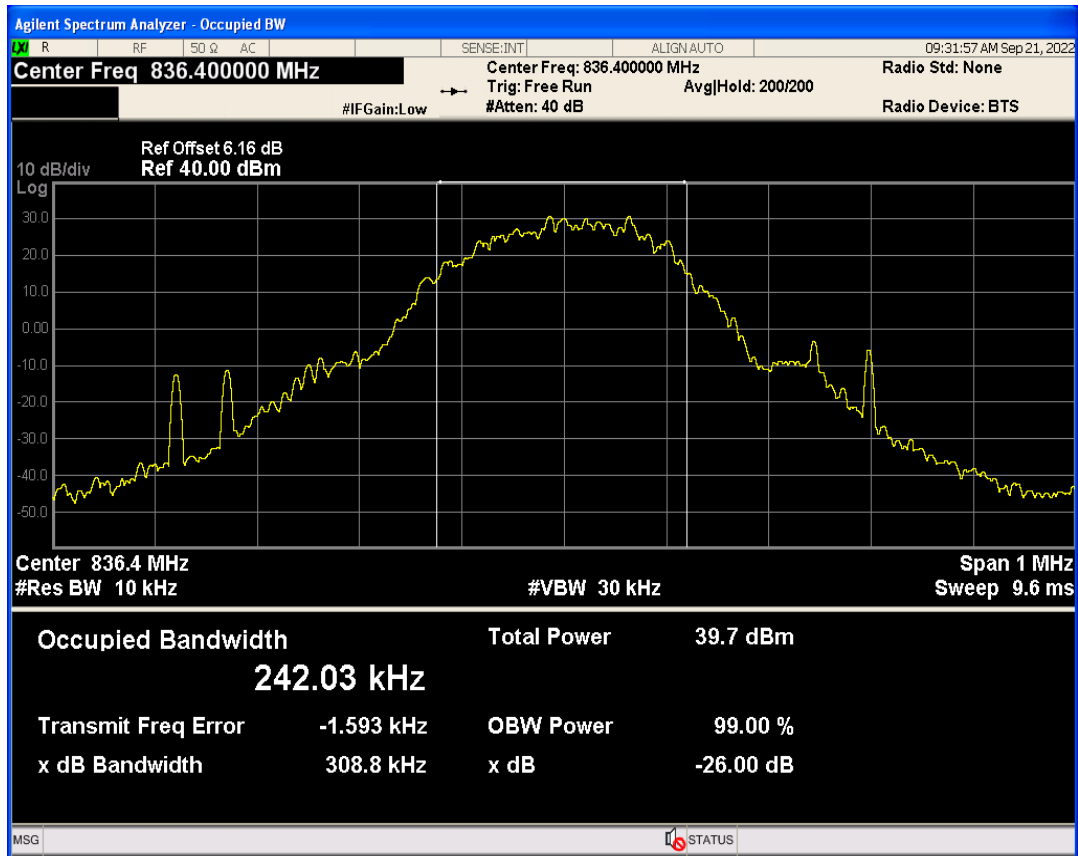

GPRS850 Channel=128

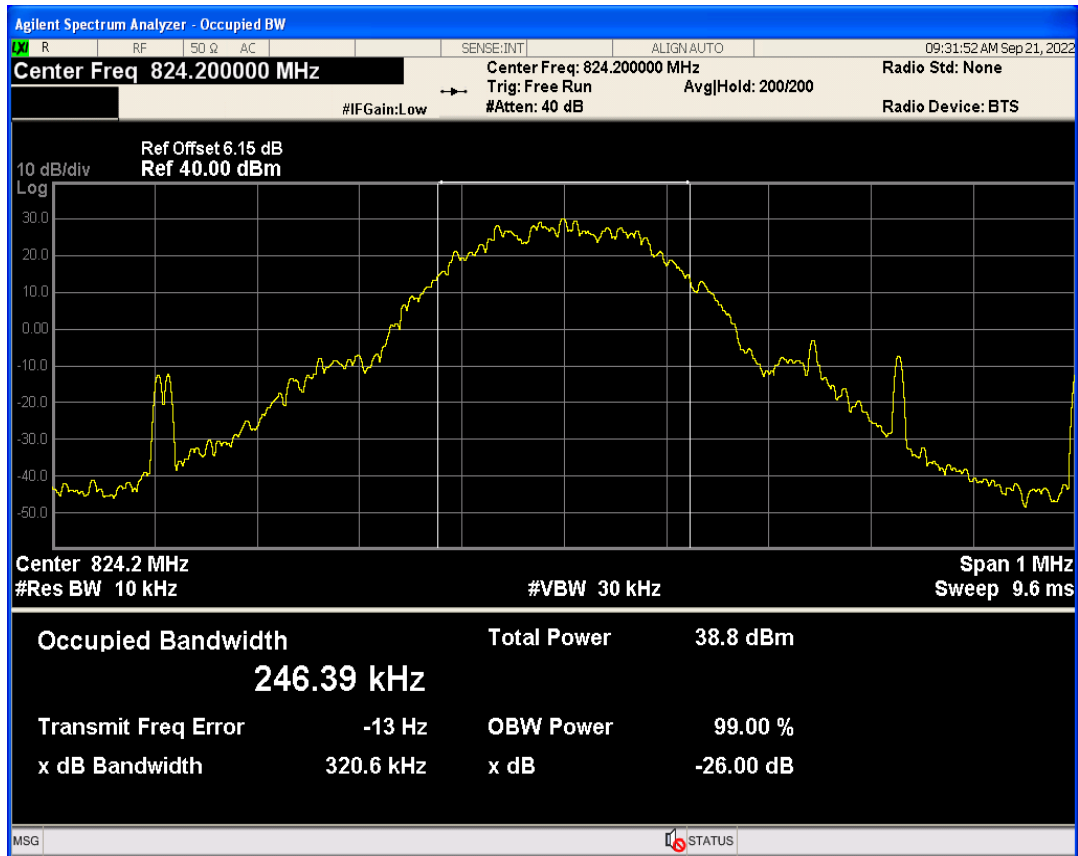


GPRS850 Channel=251

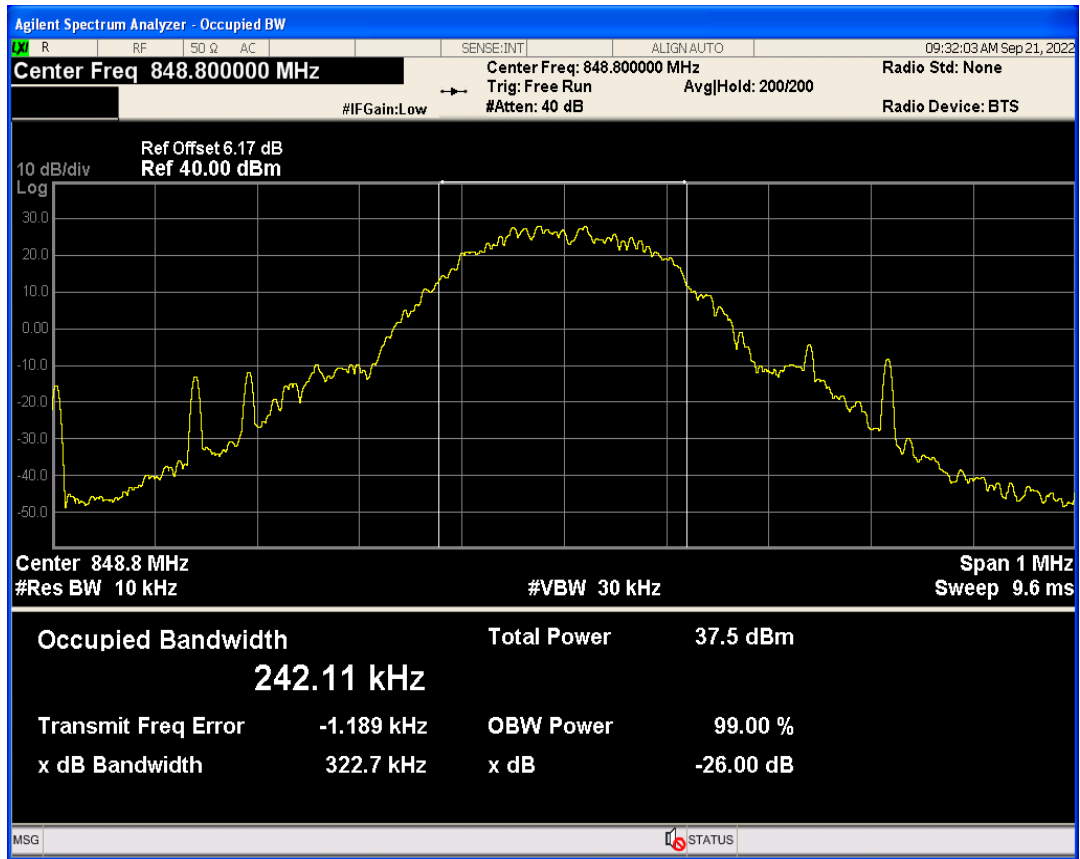


## 11 Band edge

| Band     | Channel | Frequency (MHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) | Verdict |
|----------|---------|-----------------|-----------------|------------------|-------------|---------|
| GPRS1900 | 512     | 1850.2          | 1850.00         | -29.58           | -13         | PASS    |
| GPRS1900 | 810     | 1909.8          | 1910.02         | -31.24           | -13         | PASS    |
| GPRS850  | 128     | 824.2           | 823.98          | -27.76           | -13         | PASS    |
| GPRS850  | 251     | 848.8           | 849.03          | -29.70           | -13         | PASS    |


GPRS1900 Channel=512

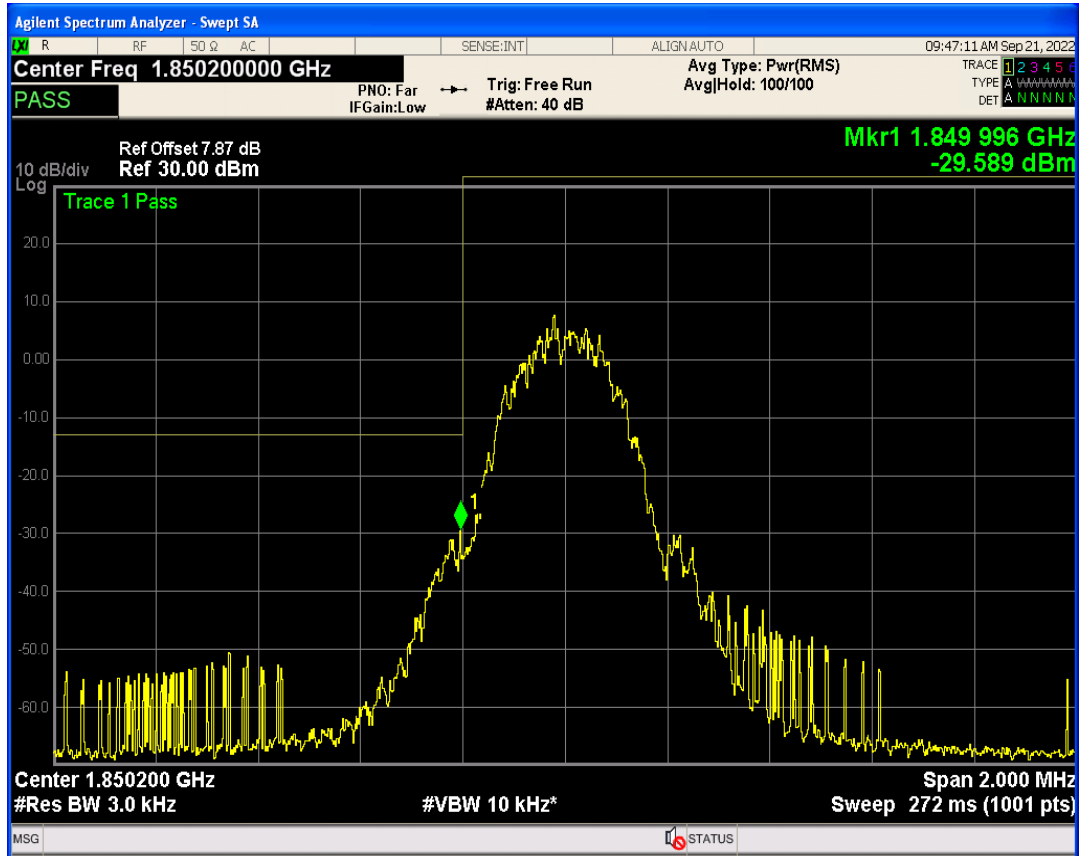


GPRS1900 Channel=810

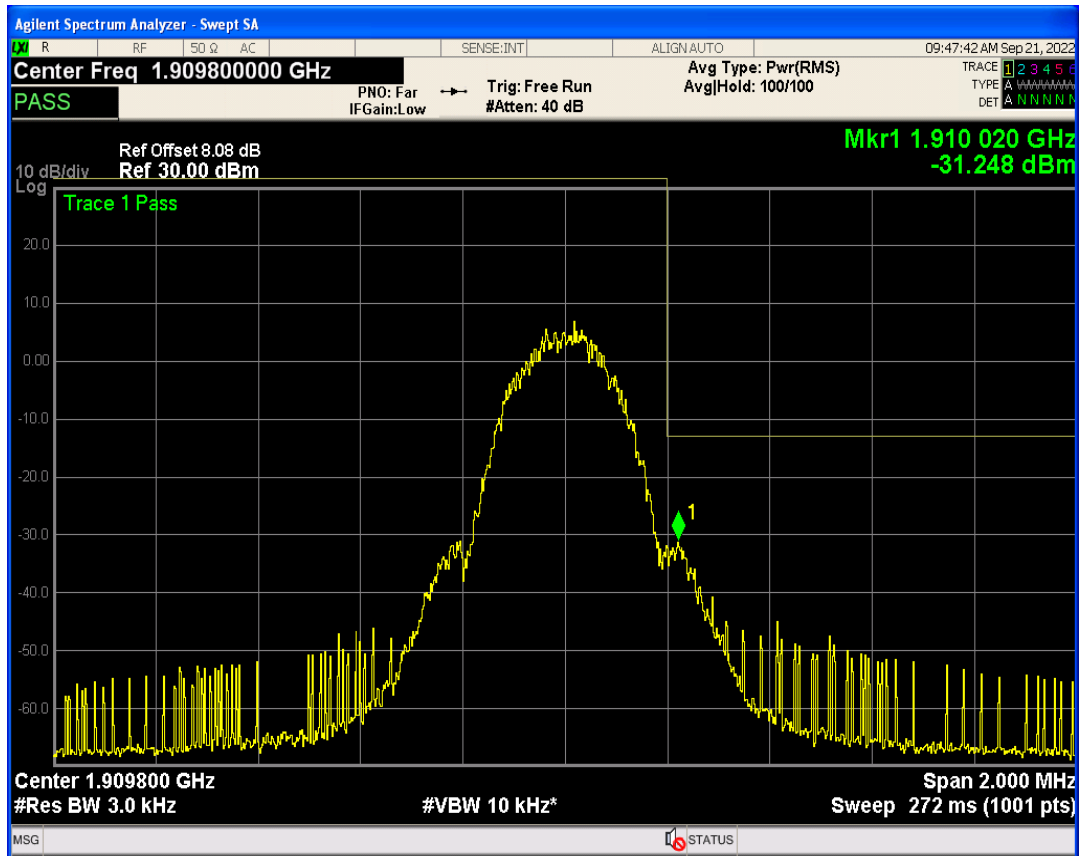

GPRS850 Channel=128

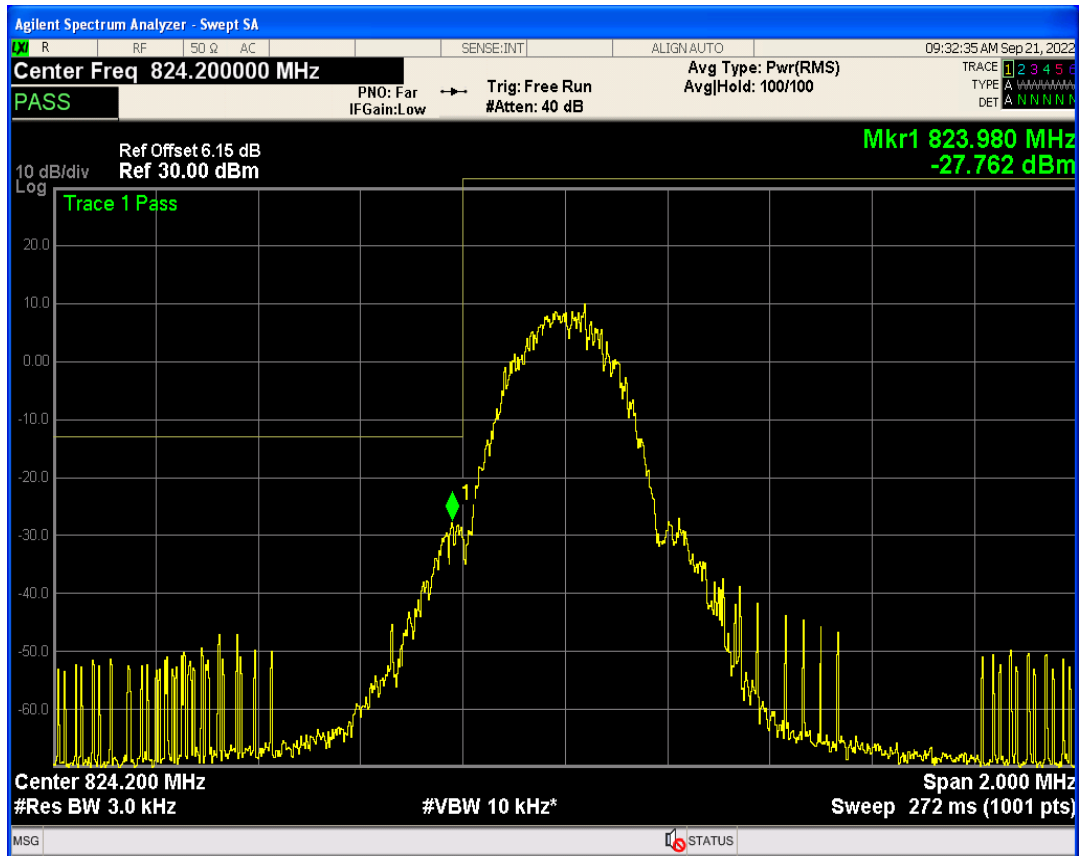


GPRS850 Channel=251

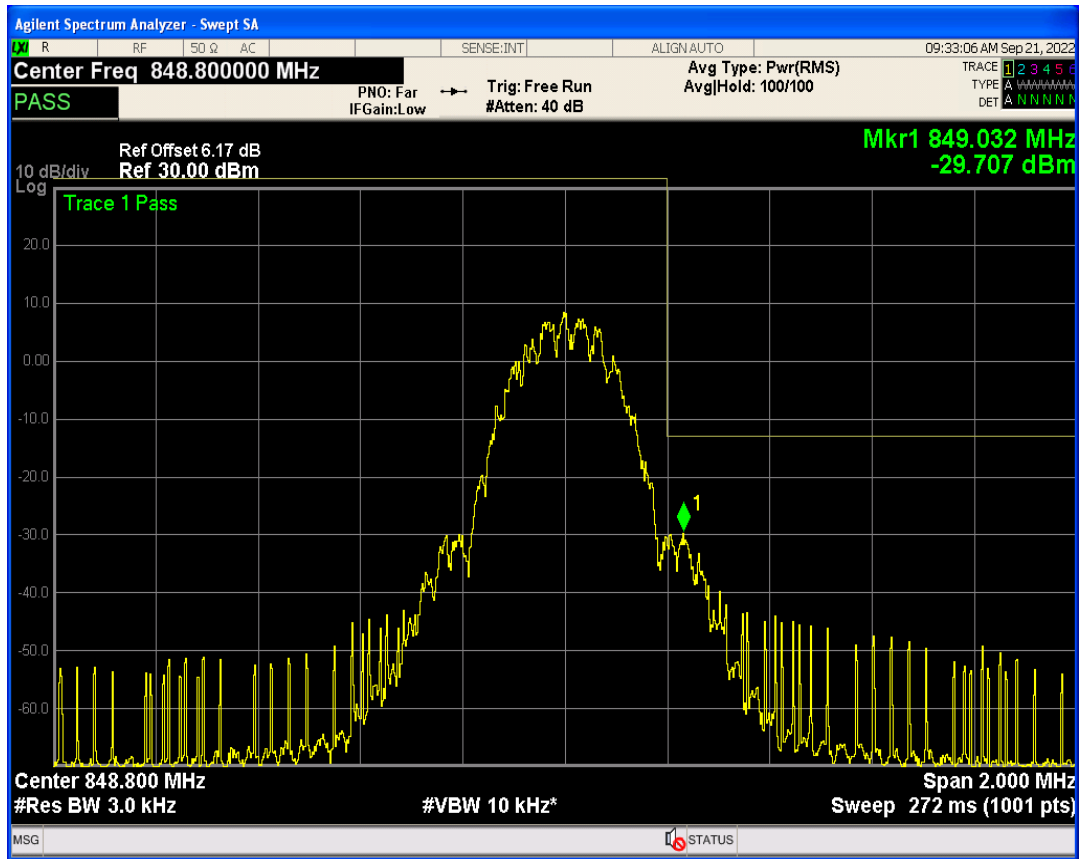


## 12 Out-of-band emissions

| Band     | Channel | Frequency (MHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) | Verdict |
|----------|---------|-----------------|-----------------|------------------|-------------|---------|
| GPRS1900 | 512     | 1850.2          | 25989.13        | -18.44           | -13         | PASS    |
| GPRS1900 | 661     | 1880            | 26016.92        | -18.51           | -13         | PASS    |
| GPRS1900 | 810     | 1909.8          | 25950.09        | -18.06           | -13         | PASS    |
| GPRS850  | 128     | 824.2           | 25562.96        | -20.41           | -13         | PASS    |
| GPRS850  | 189     | 836.4           | 25523.26        | -20.27           | -13         | PASS    |
| GPRS850  | 251     | 848.8           | 26014.94        | -19.51           | -13         | PASS    |


GPRS1900 Channel=661

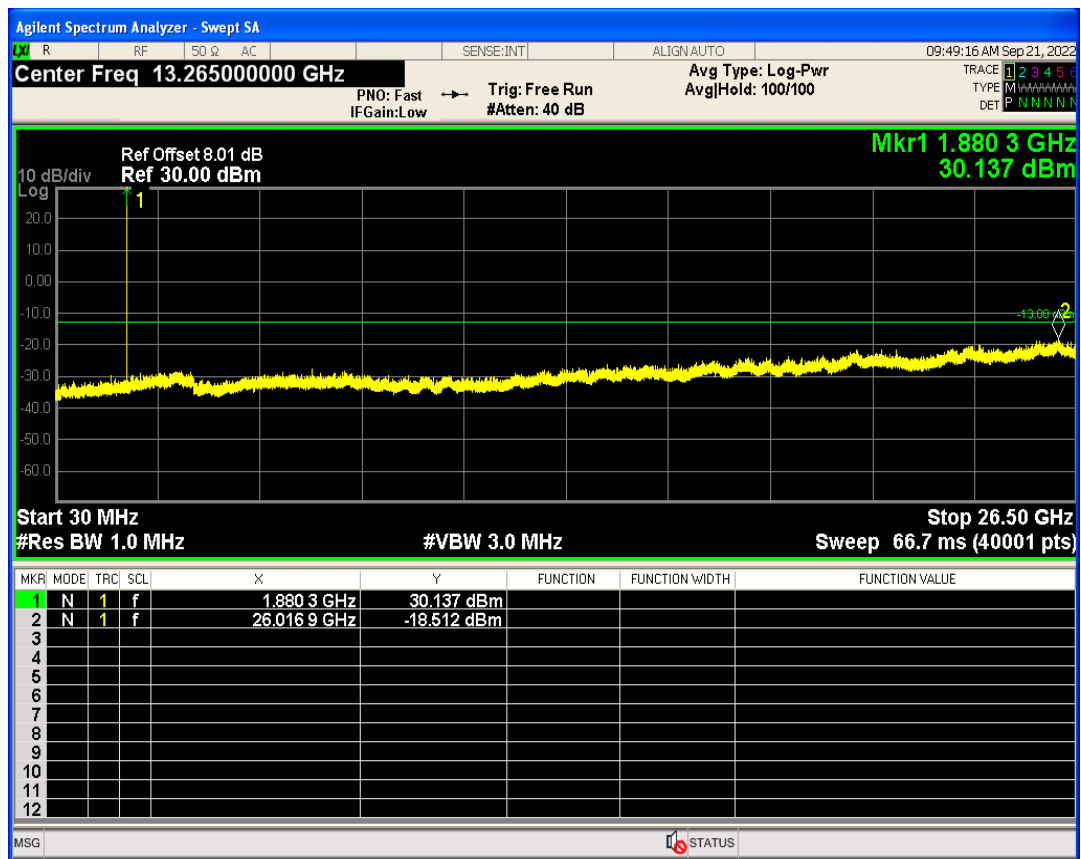


GPRS1900 Channel=512

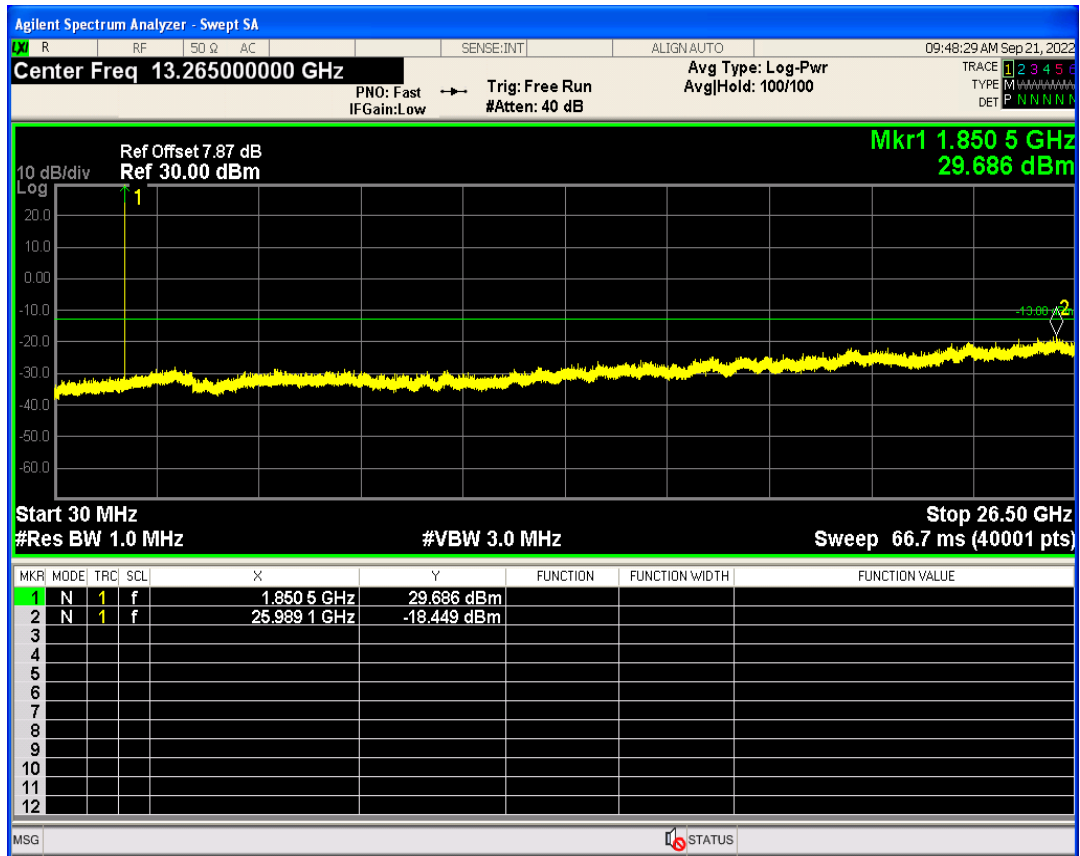


GPRS1900 Channel=810

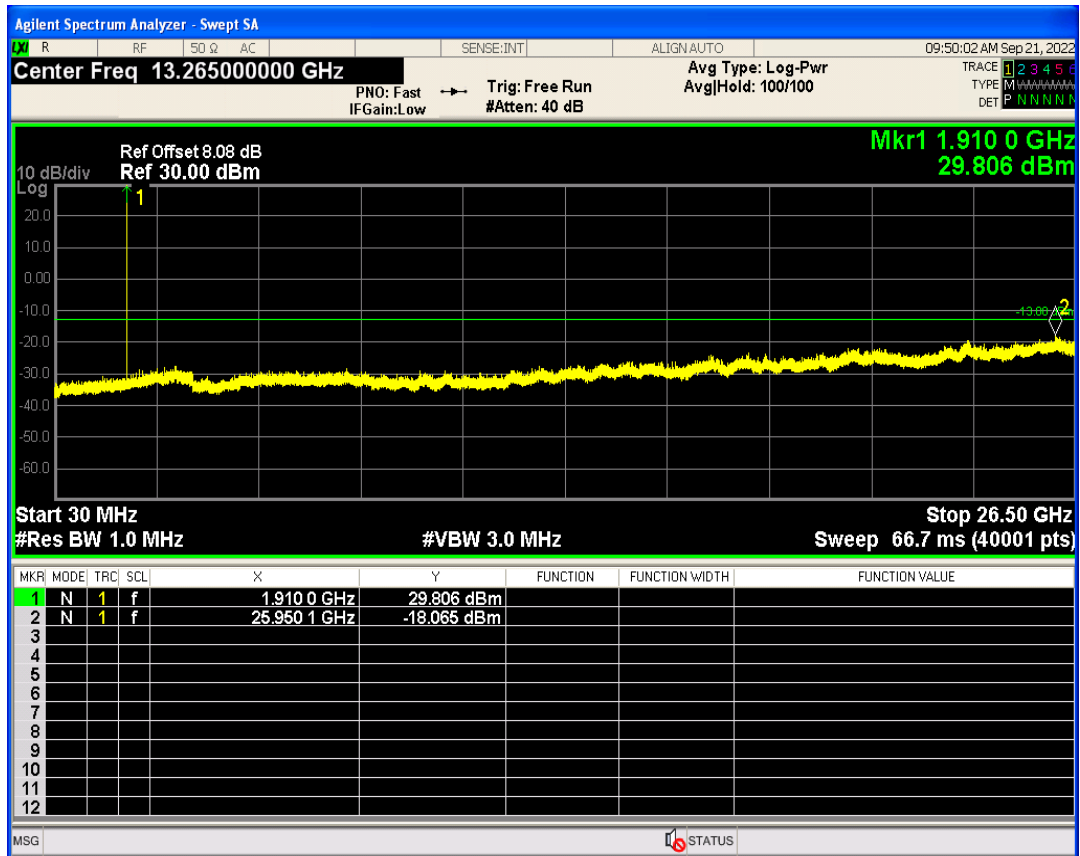


GPRS850 Channel=189

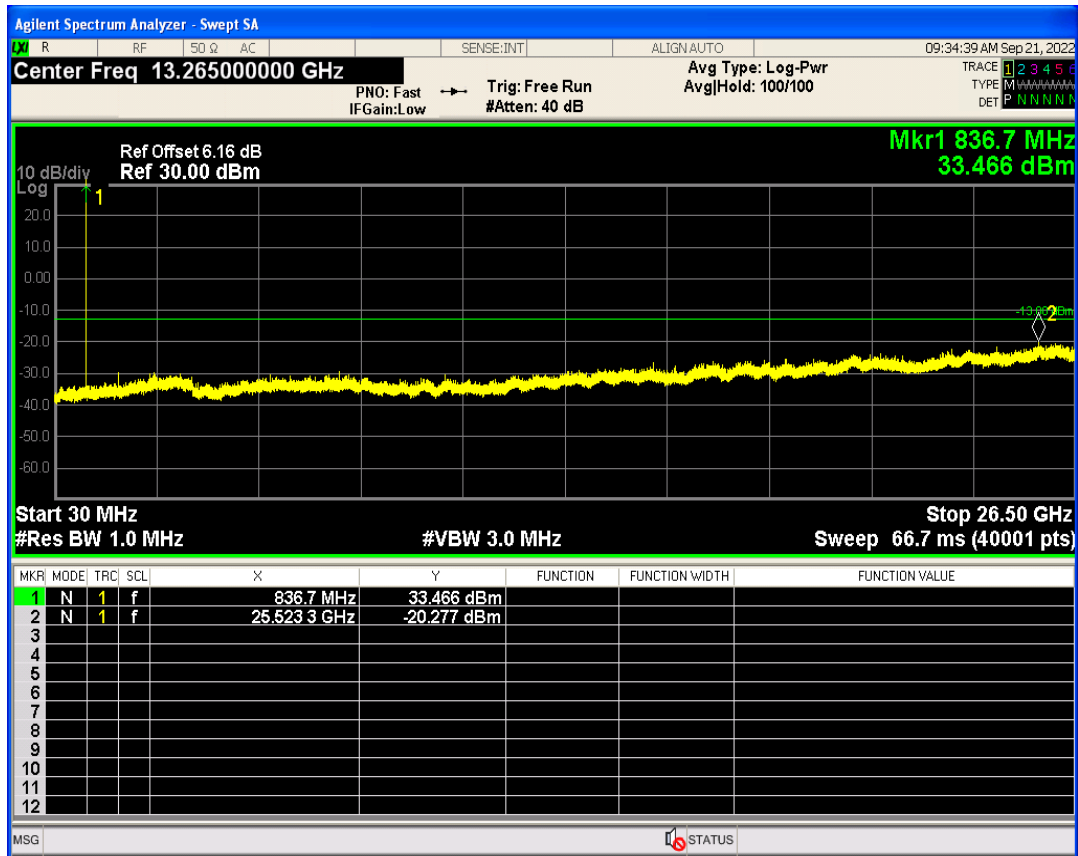

GPRS850 Channel=128

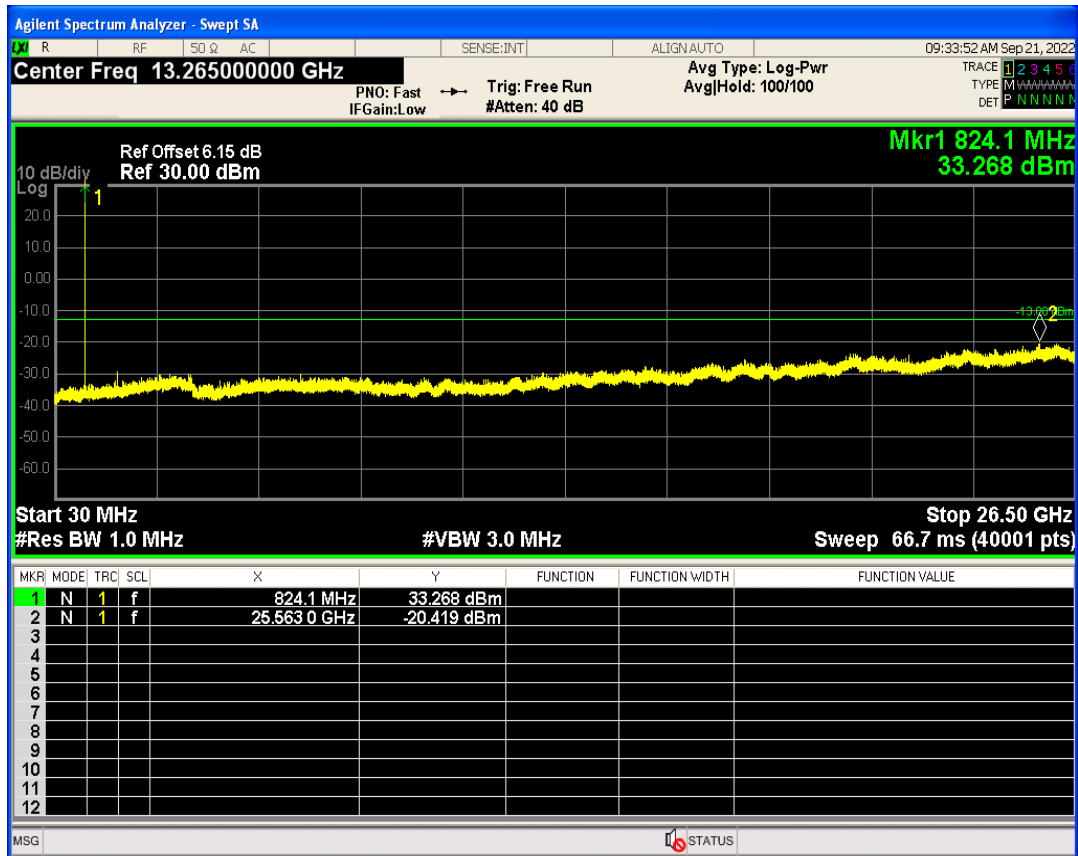

GPRS850 Channel=251

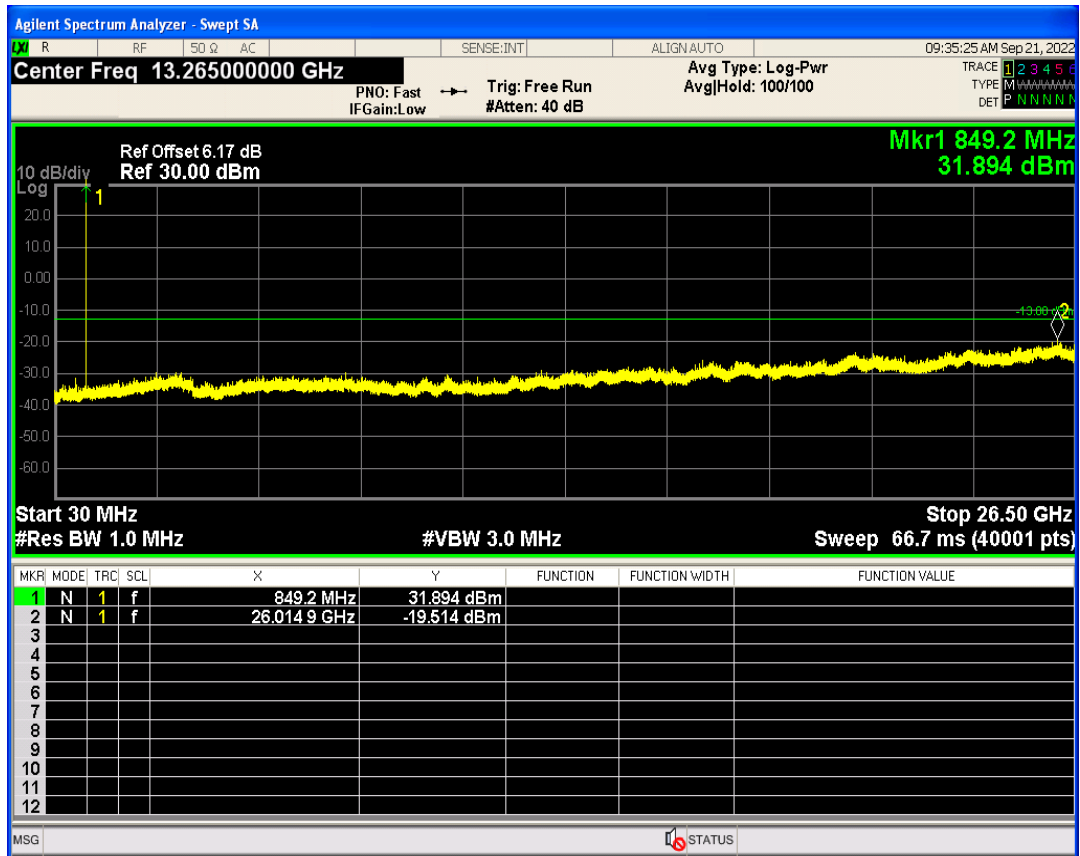


## 01 Conducted output power

| Band    | Channel | Frequency (MHz) | Power (dBm) | high Limit (dBm) | Verdict |
|---------|---------|-----------------|-------------|------------------|---------|
| GSM1900 | 512     | 1850.2          | 29.45       | 37               | PASS    |
| GSM1900 | 661     | 1880            | 29.38       | 37               | PASS    |
| GSM1900 | 810     | 1909.8          | 29.10       | 37               | PASS    |
| GSM850  | 128     | 824.2           | 32.51       | 37               | PASS    |
| GSM850  | 189     | 836.4           | 32.58       | 37               | PASS    |
| GSM850  | 251     | 848.8           | 32.40       | 37               | PASS    |


### 03 Peak-to-Average Ratio

| Band    | Channel | Frequency (MHz) | Result (dB) | high Limit (dB) | Verdict |
|---------|---------|-----------------|-------------|-----------------|---------|
| GSM1900 | 512     | 1850.2          | 2.62        | 13              | PASS    |
| GSM1900 | 661     | 1880            | 2.62        | 13              | PASS    |
| GSM1900 | 810     | 1909.8          | 2.64        | 13              | PASS    |
| GSM850  | 128     | 824.2           | 2.63        | 13              | PASS    |
| GSM850  | 189     | 836.4           | 2.64        | 13              | PASS    |
| GSM850  | 251     | 848.8           | 2.63        | 13              | PASS    |


GSM1900 Channel=661

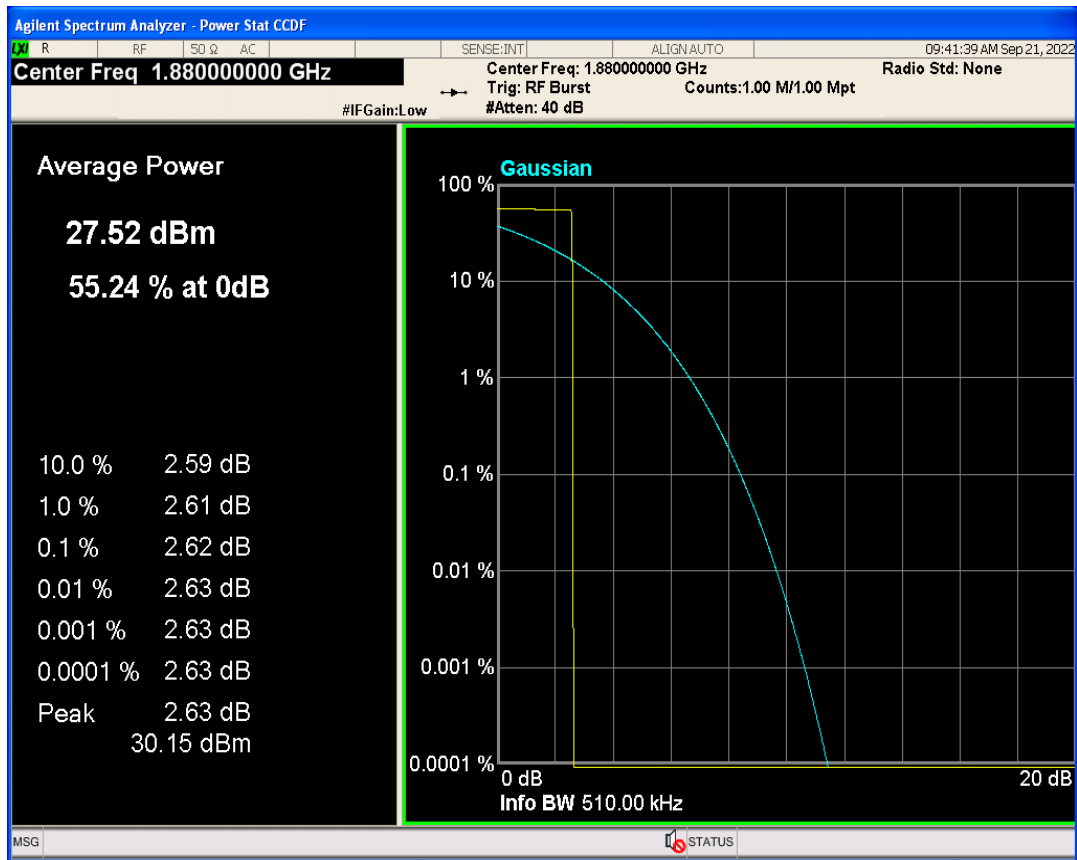


GSM1900 Channel=512

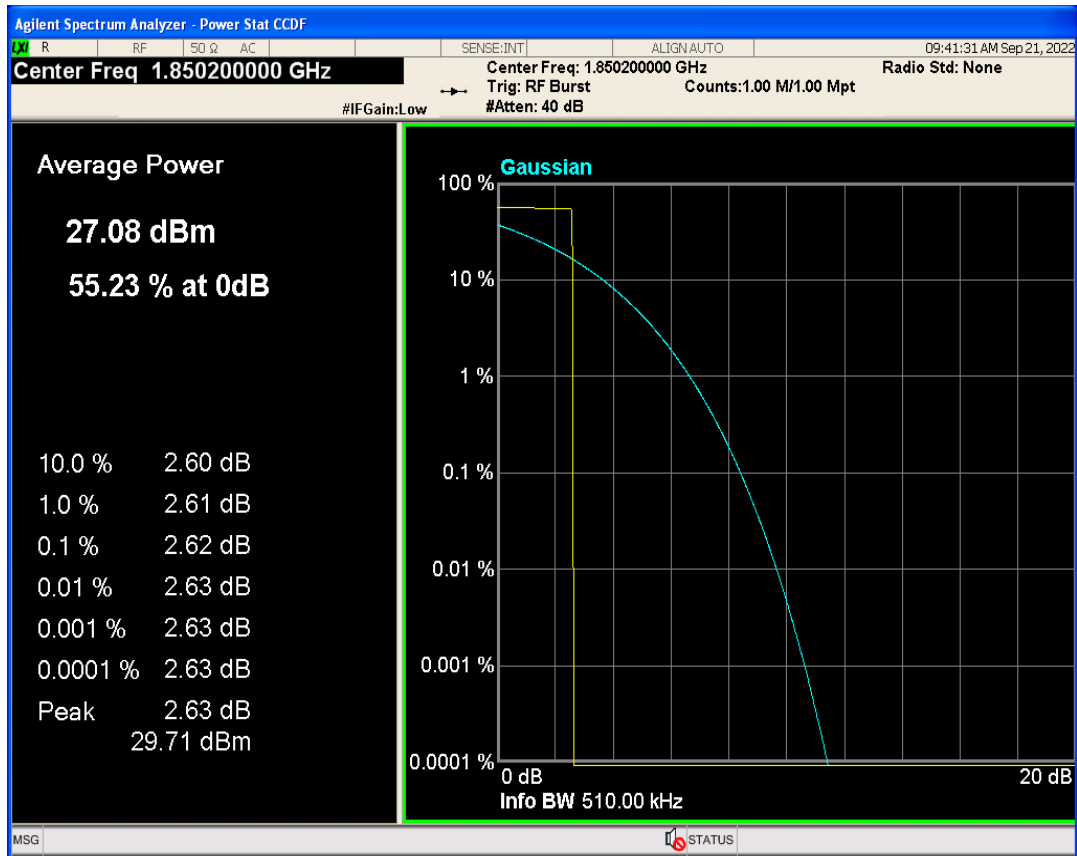


GSM1900 Channel=810

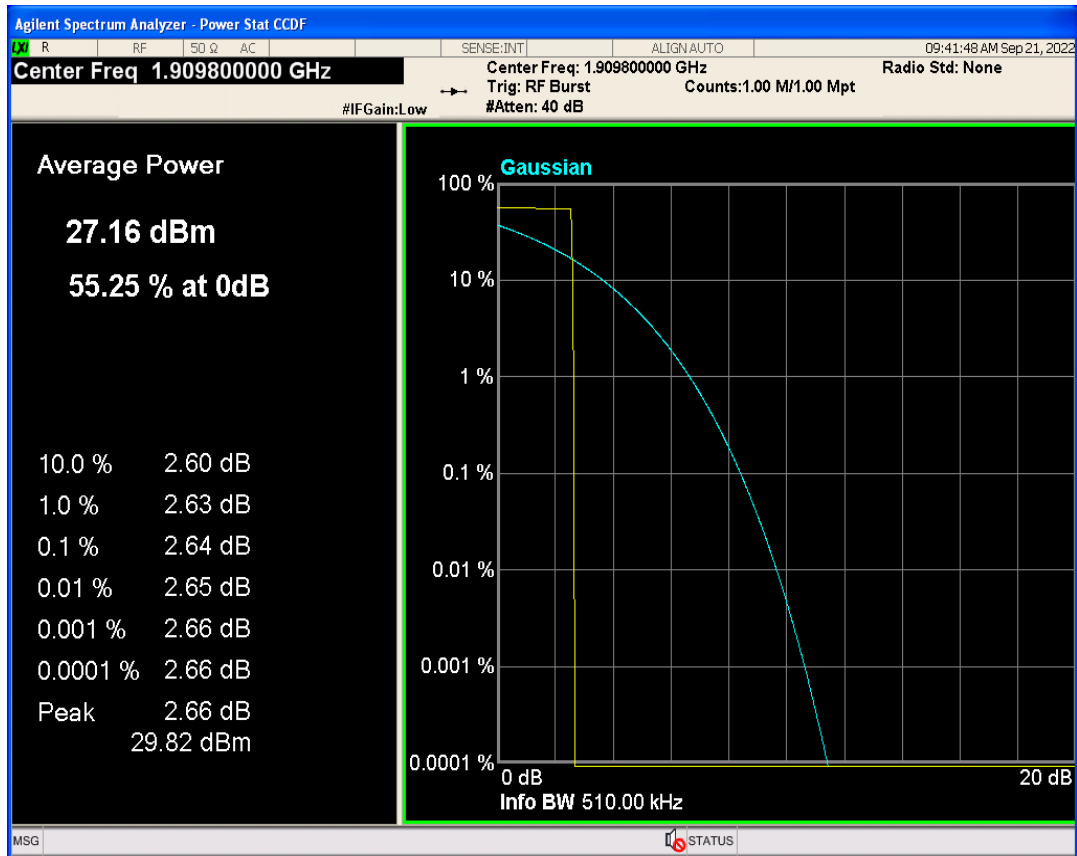


GSM850 Channel=189

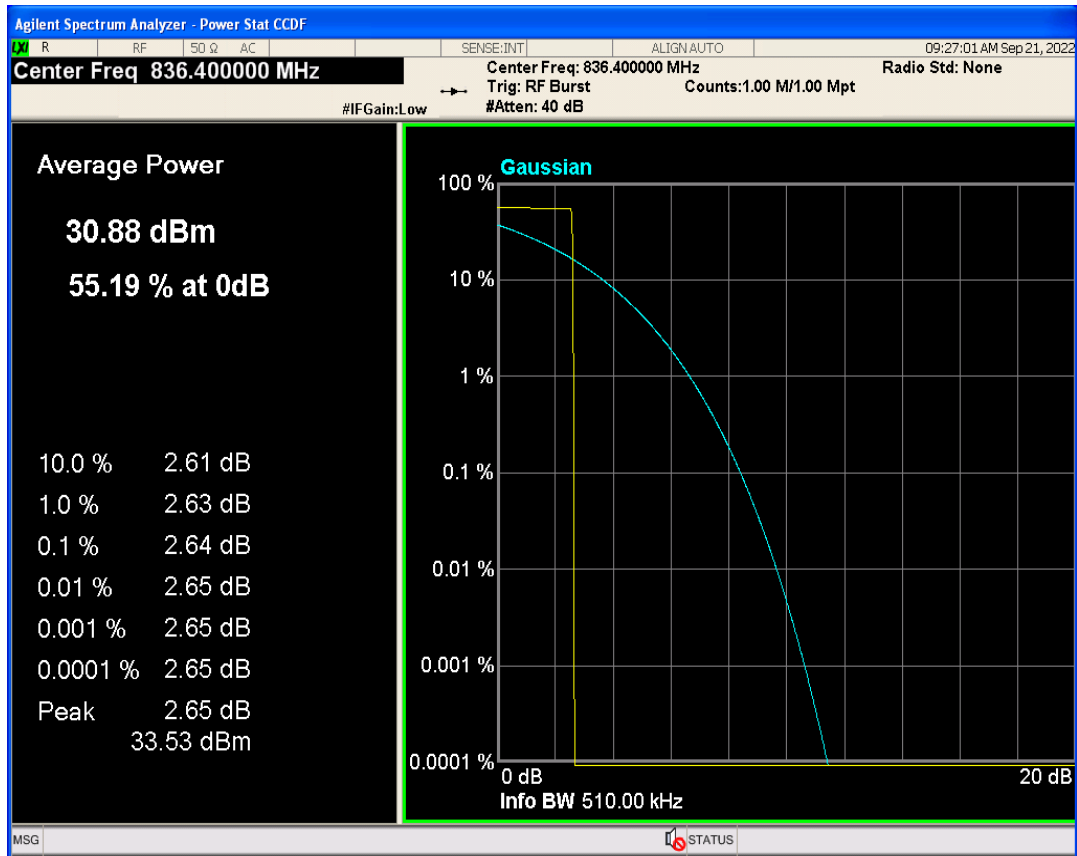

GSM850 Channel=128

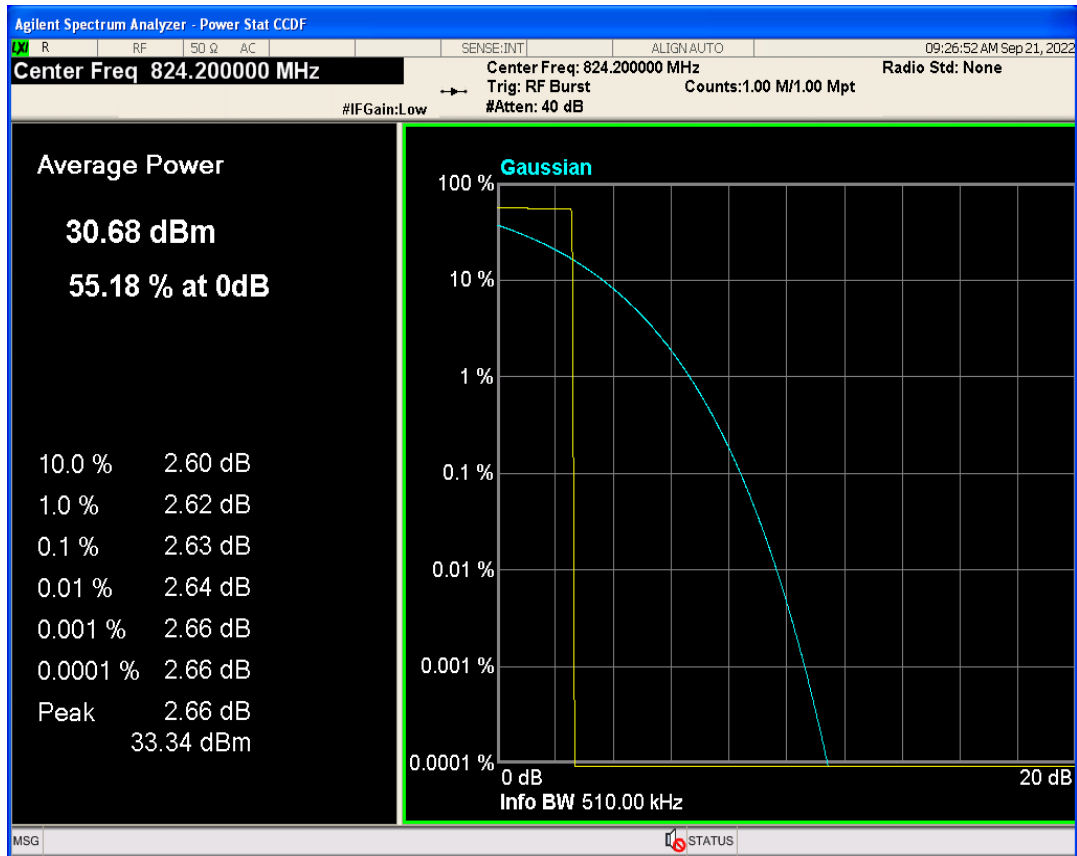


GSM850 Channel=251

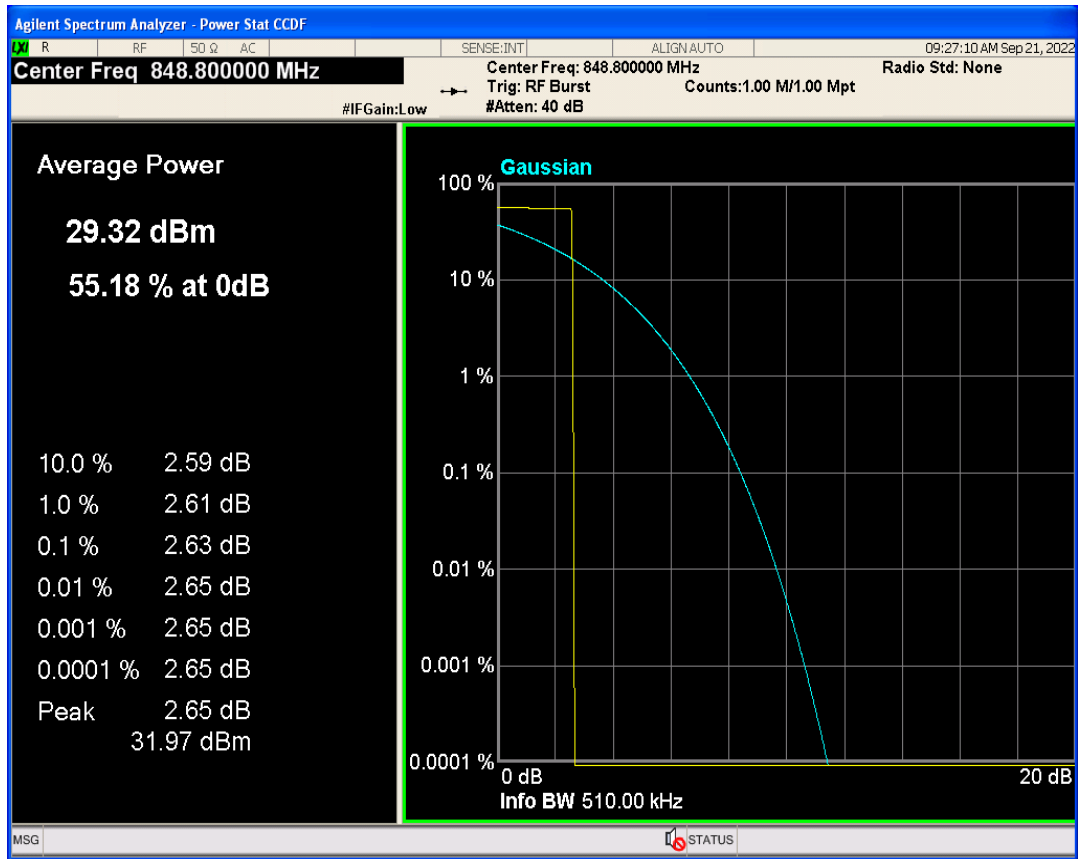


#### 04 Occupied bandwidth

| Band    | Channel | Frequency (MHz) | 99% OBW (kHz) | -26dB EBW (kHz) | Verdict |
|---------|---------|-----------------|---------------|-----------------|---------|
| GSM1900 | 512     | 1850.2          | 246.071       | 318.546         | PASS    |
| GSM1900 | 661     | 1880            | 243.826       | 313.268         | PASS    |
| GSM1900 | 810     | 1909.8          | 248.992       | 310.179         | PASS    |
| GSM850  | 128     | 824.2           | 243.057       | 315.519         | PASS    |
| GSM850  | 189     | 836.4           | 234.867       | 308.331         | PASS    |
| GSM850  | 251     | 848.8           | 242.837       | 328.839         | PASS    |


GSM1900 Channel=661

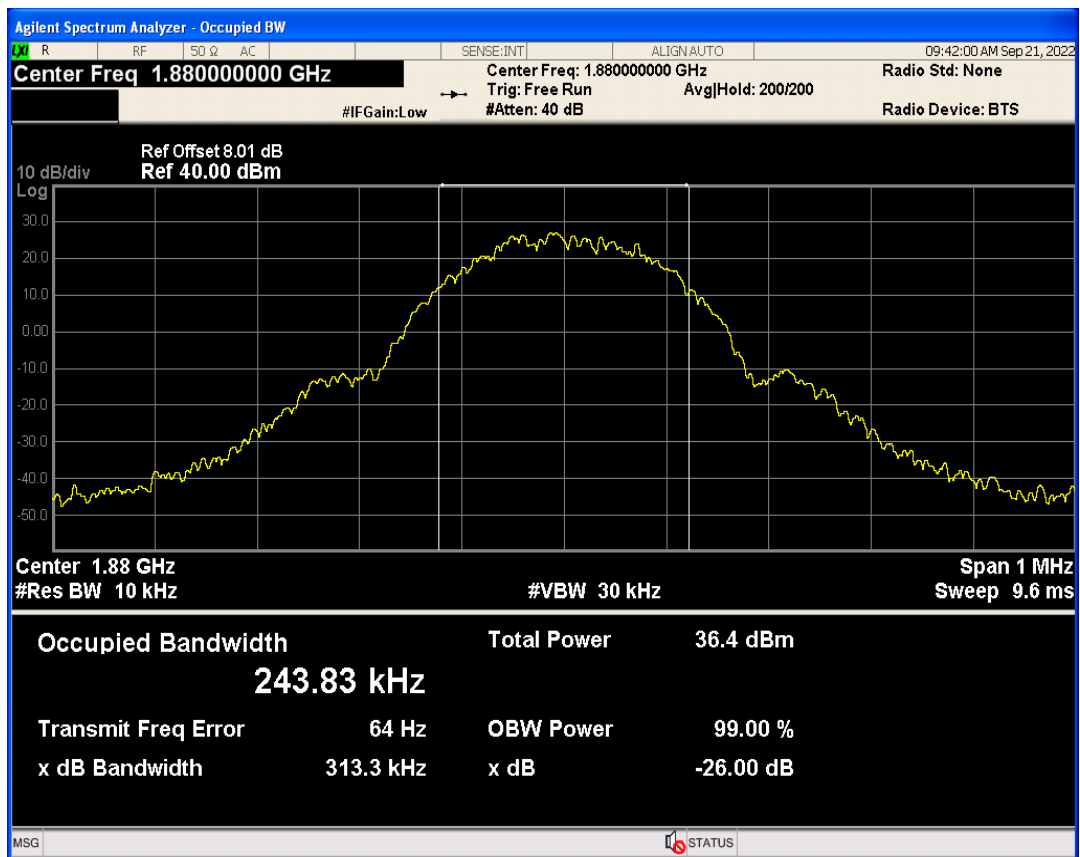


GSM1900 Channel=512

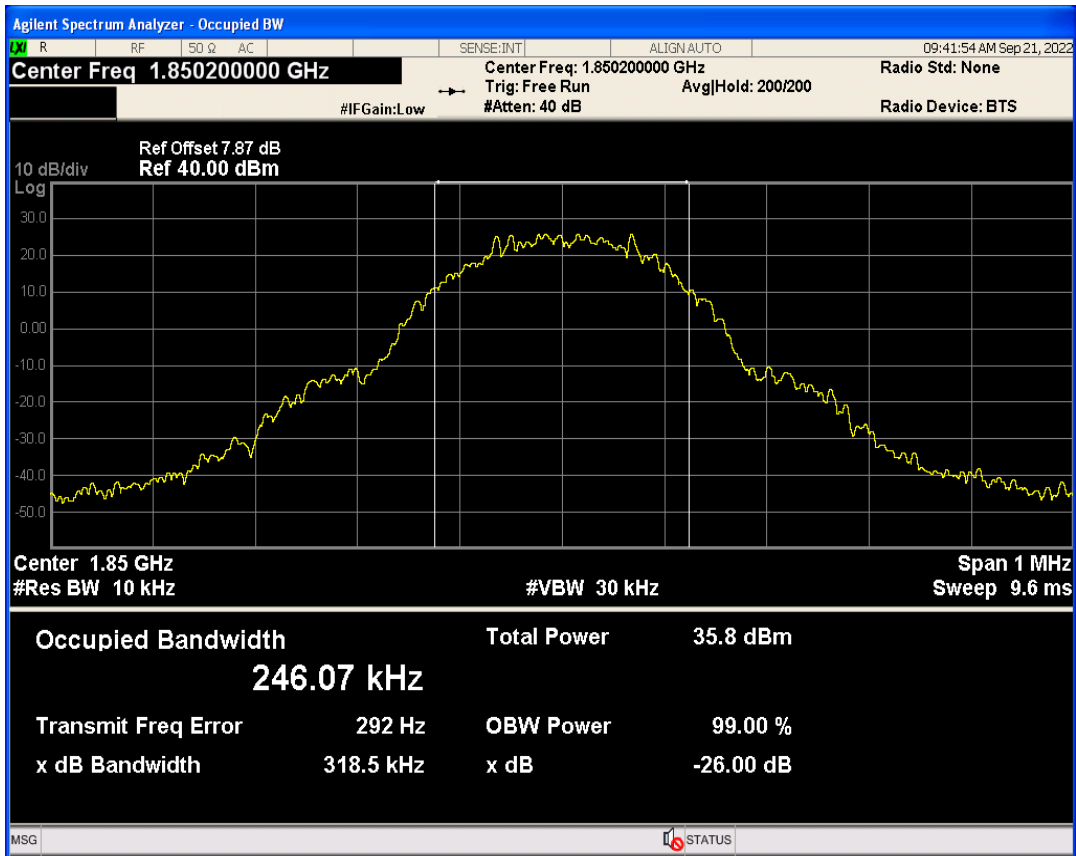


GSM1900 Channel=810

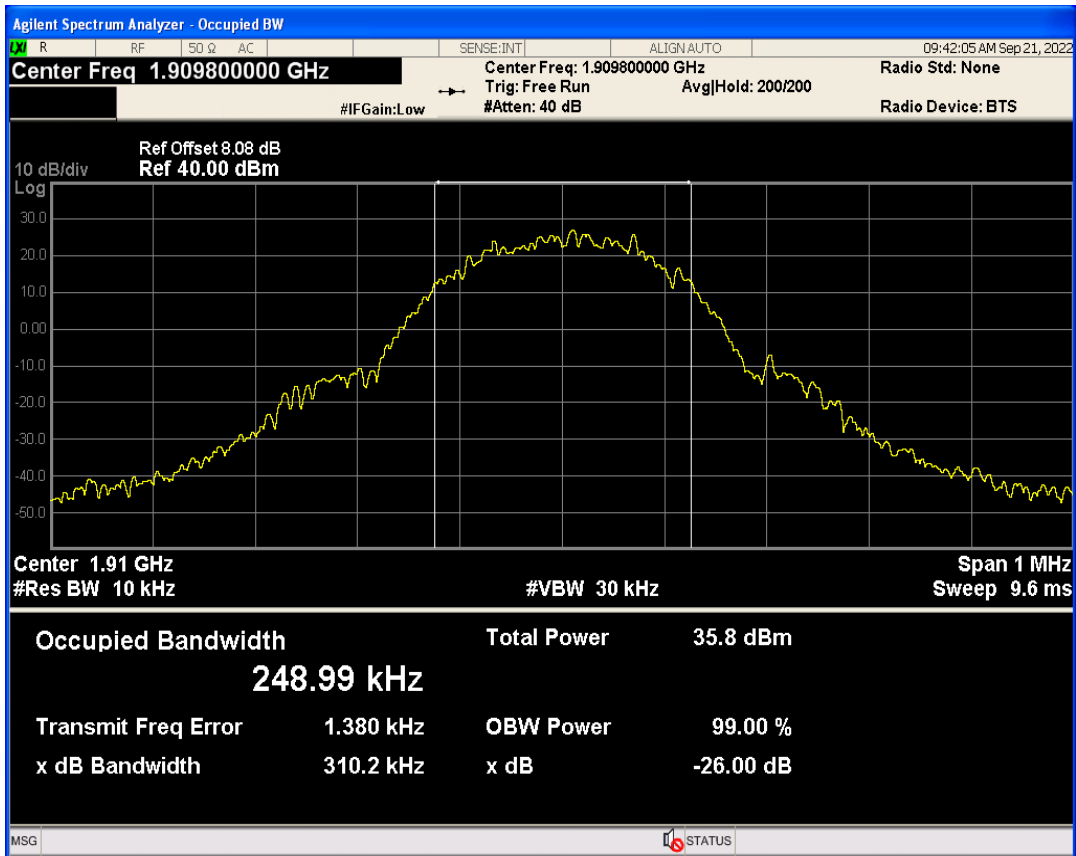


GSM850 Channel=128

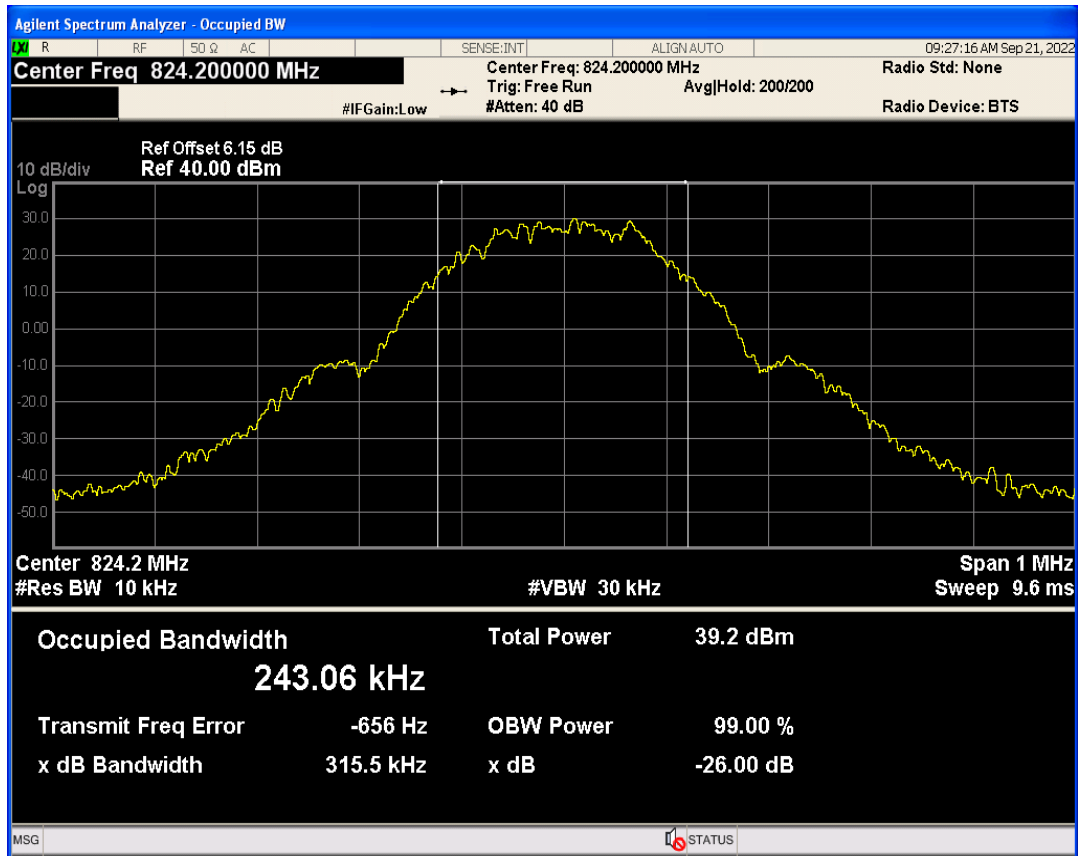

GSM850 Channel=189

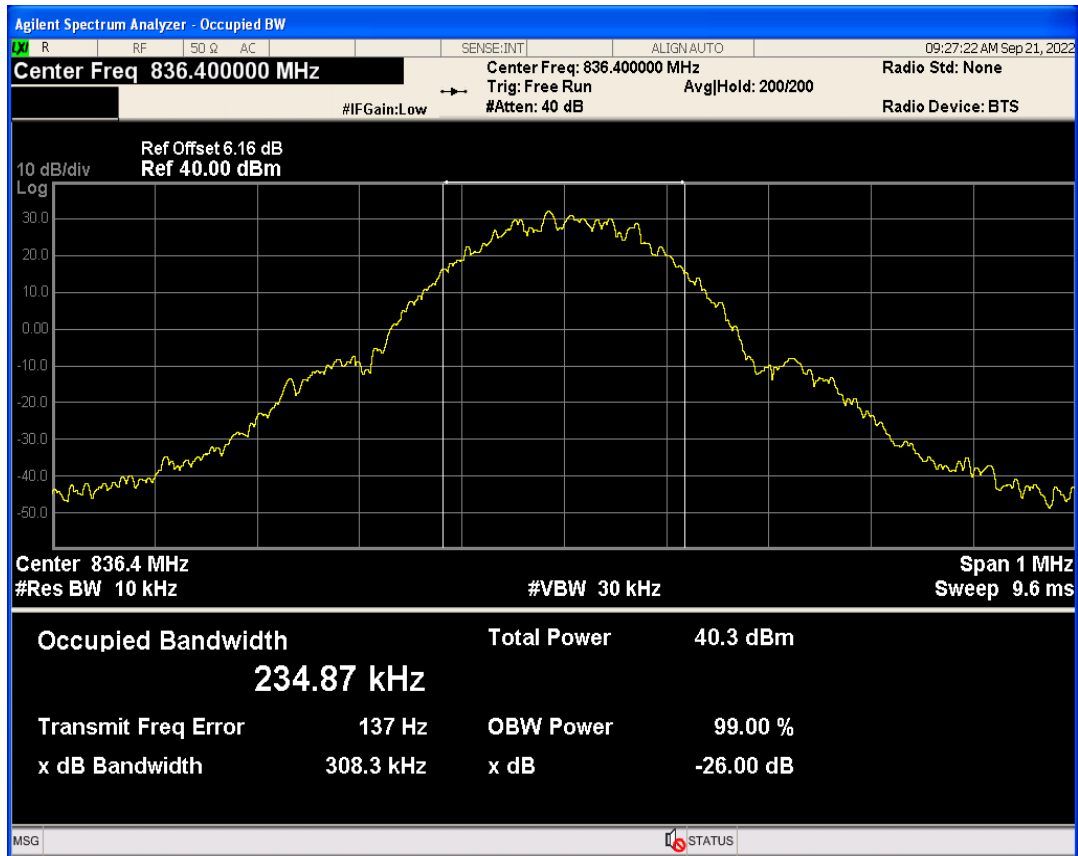


GSM850 Channel=251

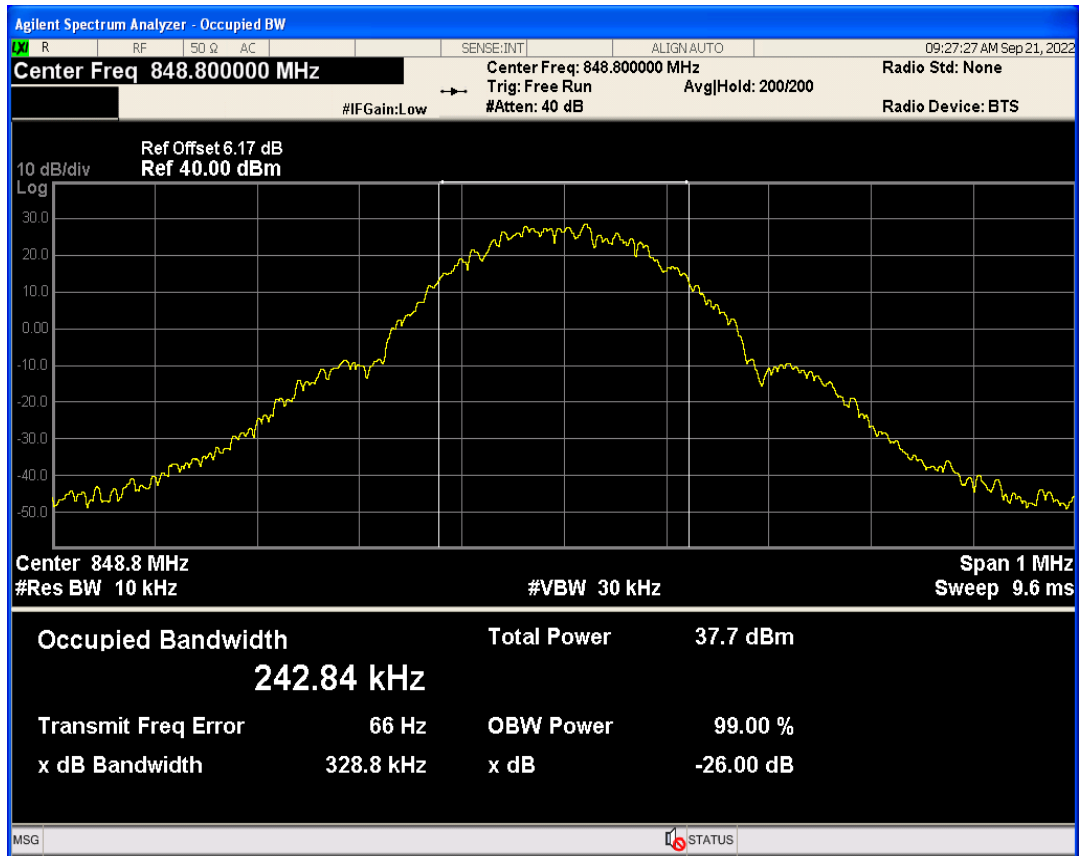


## 05 Band edge

| Band    | Channel | Frequency (MHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) | Verdict |
|---------|---------|-----------------|-----------------|------------------|-------------|---------|
| GSM1900 | 512     | 1850.2          | 1849.98         | -28.60           | -13         | PASS    |
| GSM1900 | 810     | 1909.8          | 1910.02         | -29.79           | -13         | PASS    |
| GSM850  | 128     | 824.2           | 823.98          | -26.60           | -13         | PASS    |
| GSM850  | 251     | 848.8           | 849.02          | -26.56           | -13         | PASS    |


GSM1900 Channel=810

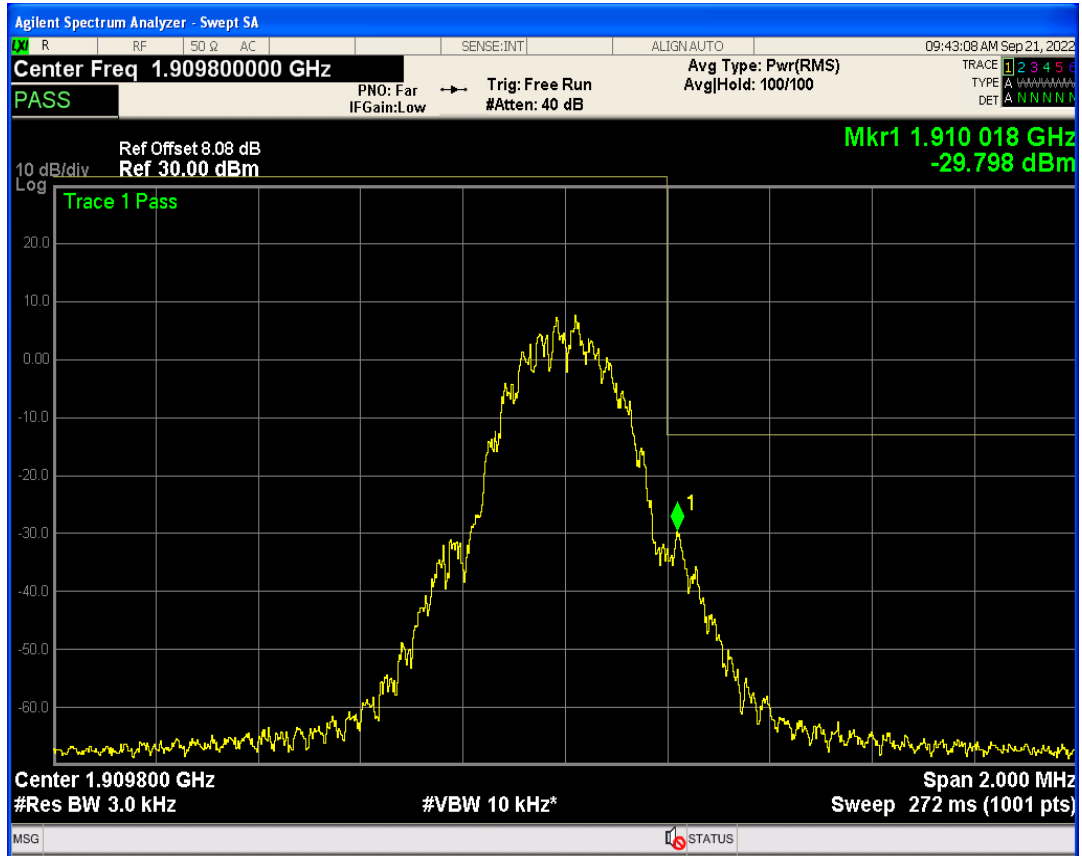


GSM1900 Channel=512

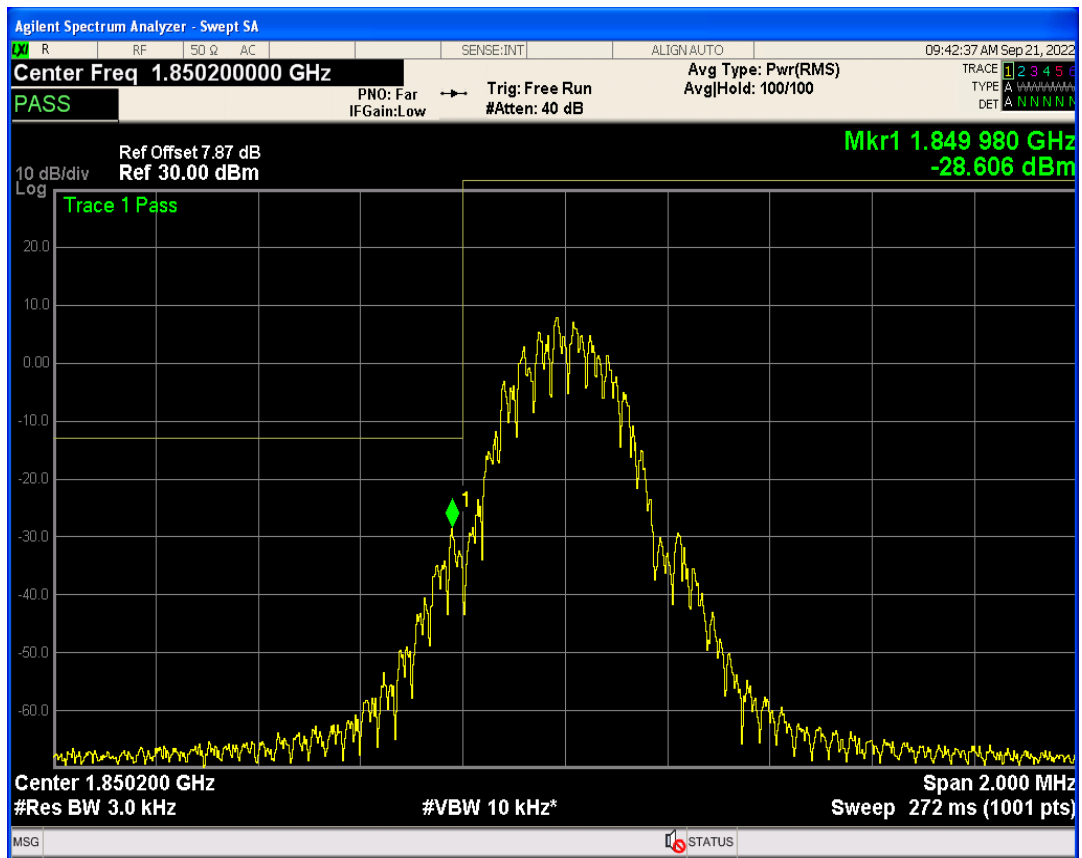

GSM850 Channel=128

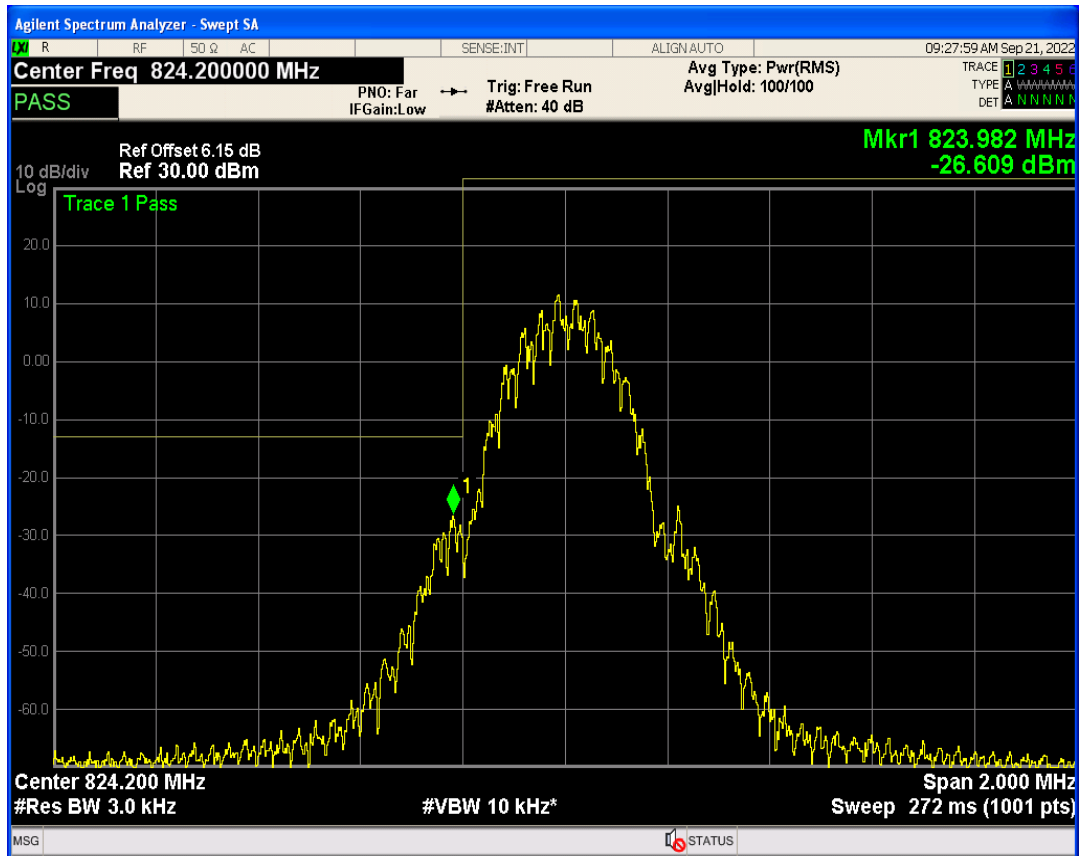


GSM850 Channel=251

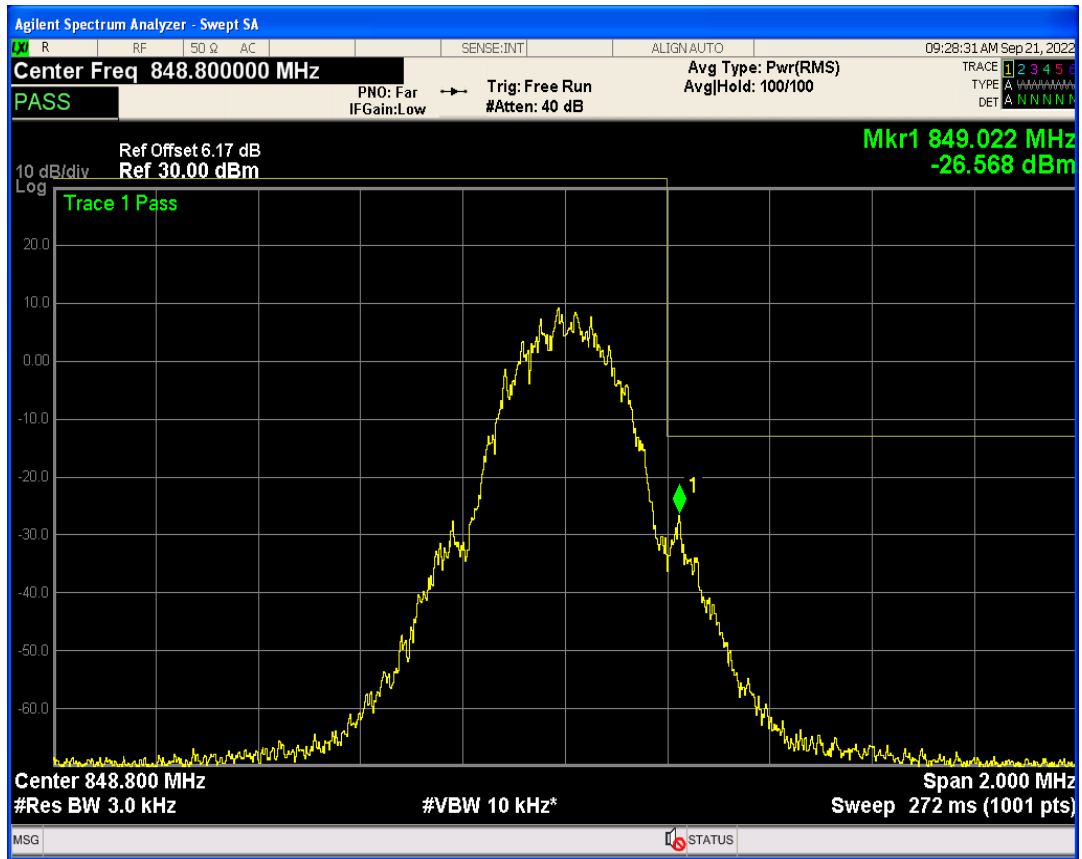


## 06 Out-of-band emissions

| Band    | Channel | Frequency (MHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) | Verdict |
|---------|---------|-----------------|-----------------|------------------|-------------|---------|
| GSM1900 | 512     | 1850.2          | 25920.97        | -18.20           | -13         | PASS    |
| GSM1900 | 661     | 1880            | 26045.38        | -18.45           | -13         | PASS    |
| GSM1900 | 810     | 1909.8          | 25529.21        | -18.47           | -13         | PASS    |
| GSM850  | 128     | 824.2           | 26050.01        | -20.12           | -13         | PASS    |
| GSM850  | 189     | 836.4           | 25866.04        | -19.90           | -13         | PASS    |
| GSM850  | 251     | 848.8           | 26075.16        | -20.04           | -13         | PASS    |


GSM1900 Channel=661

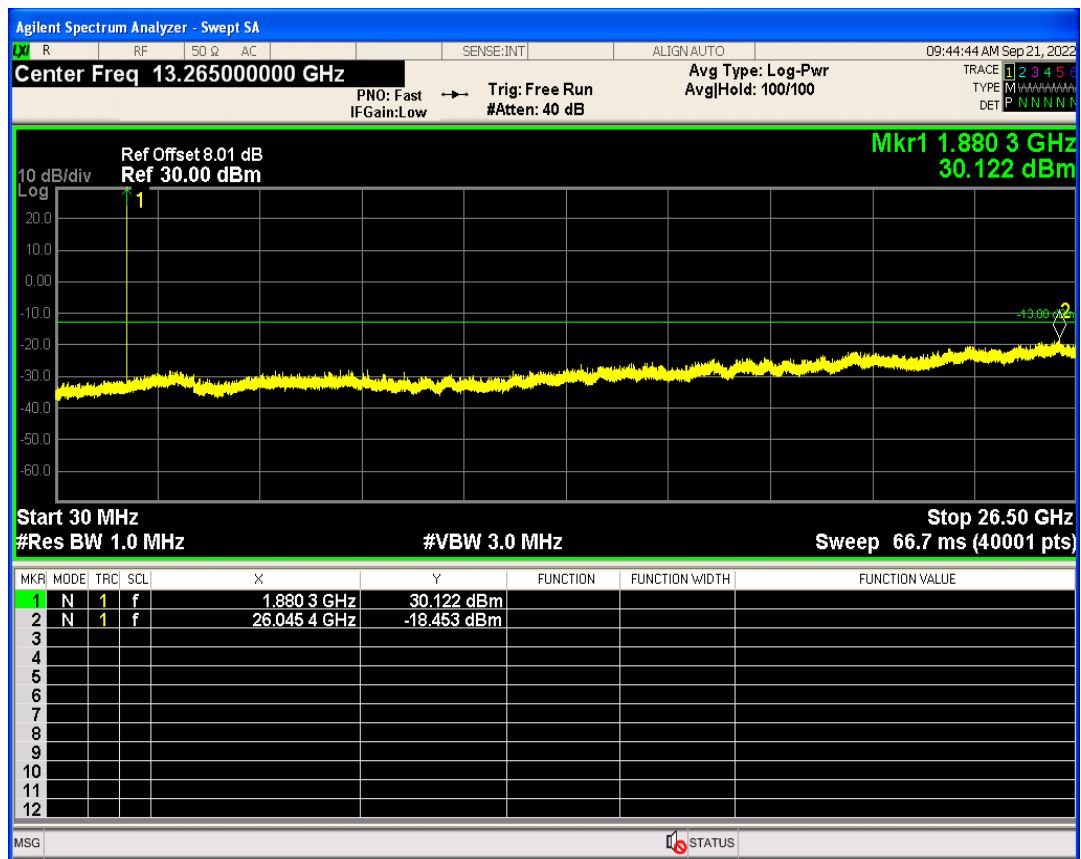


GSM1900 Channel=512

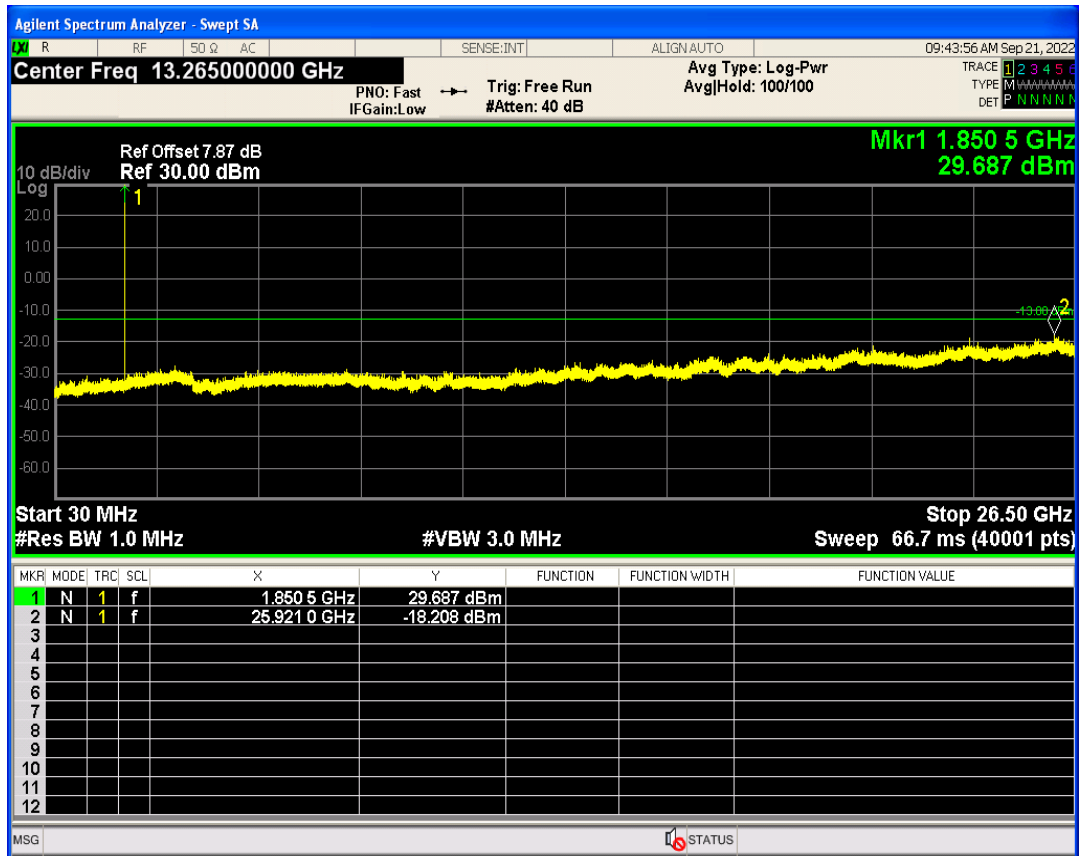


GSM1900 Channel=810

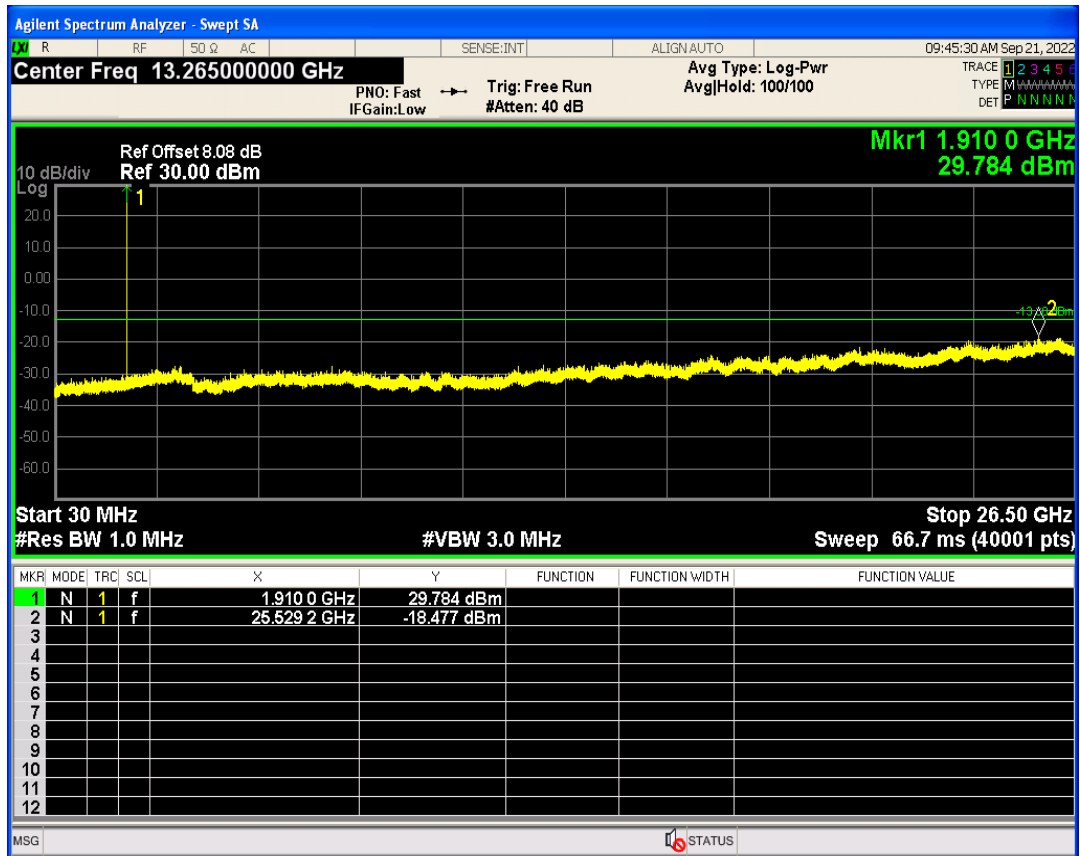


GSM850 Channel=128

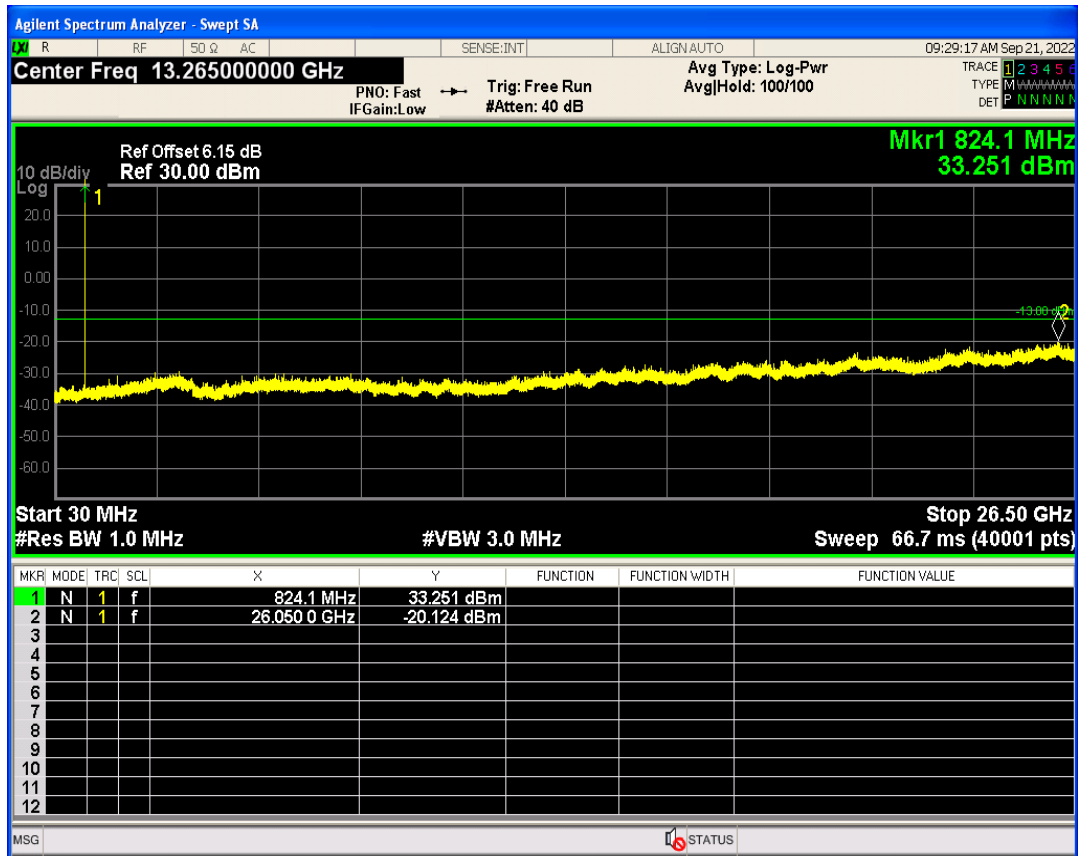

GSM850 Channel=189

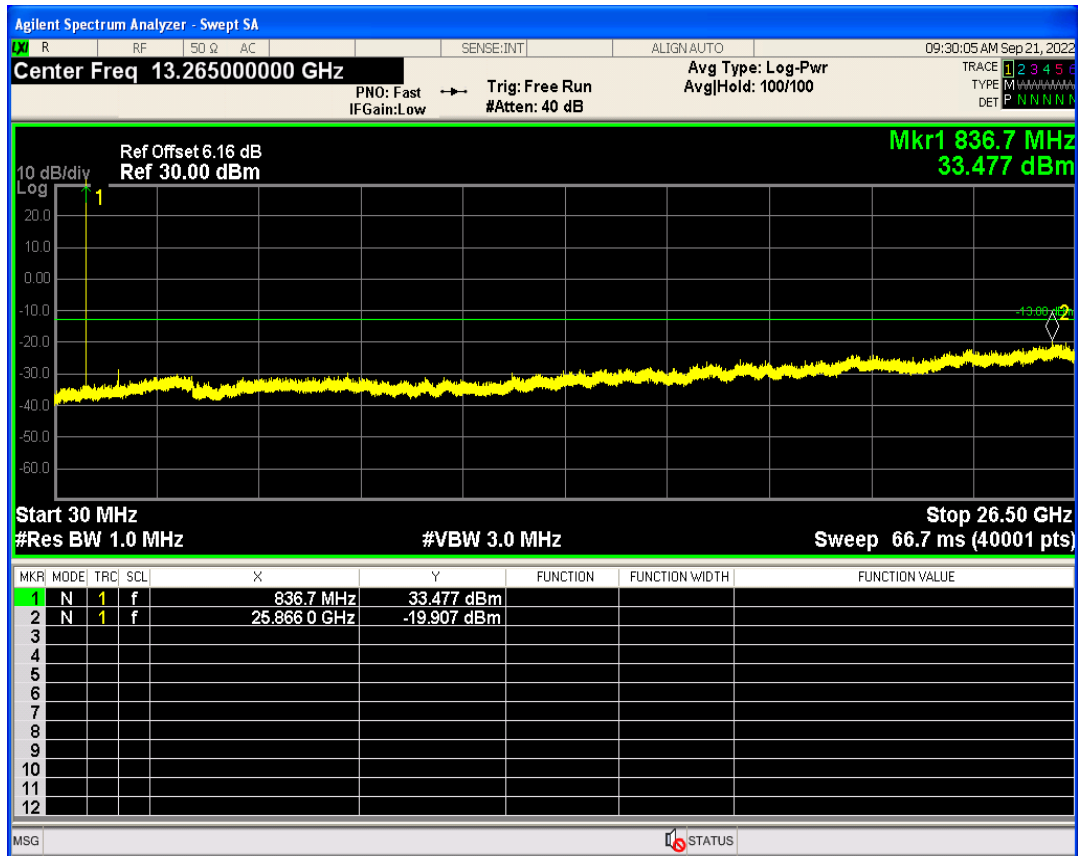

GSM850 Channel=251

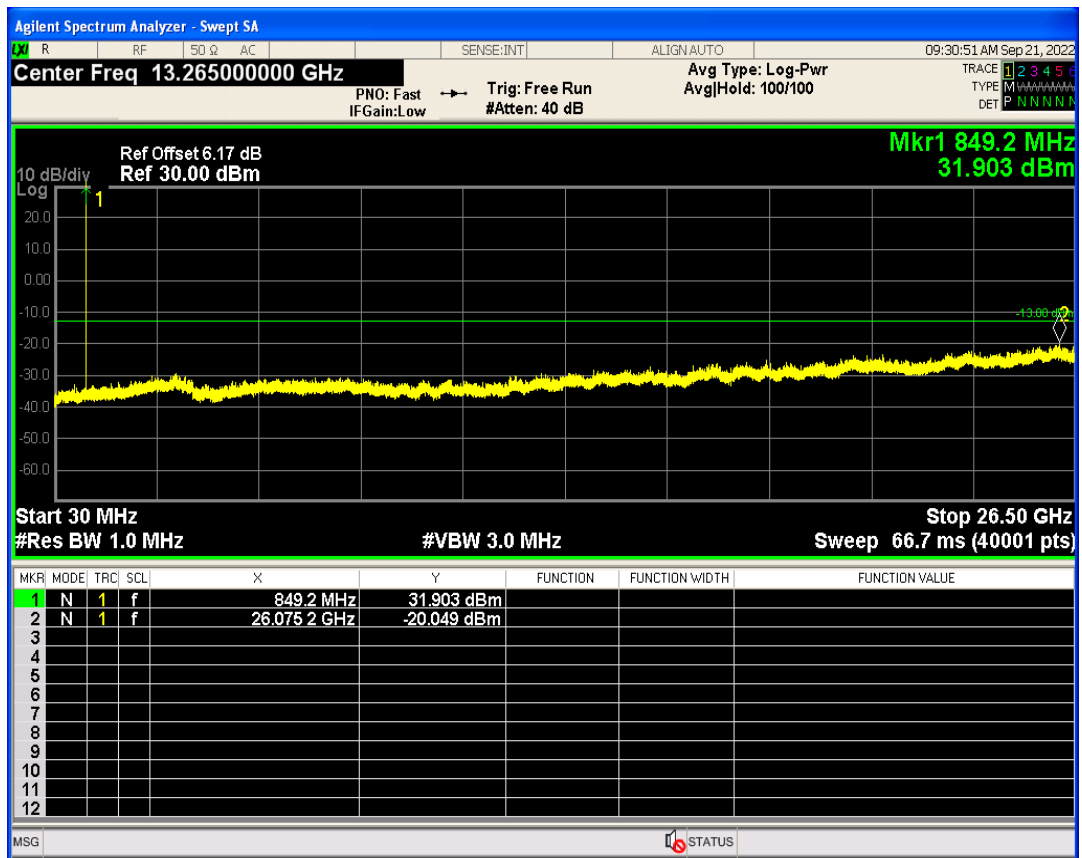

# 3G


## 01 Conducted output power

| Band        | Channel | Frequency (MHz) | Power (dBm) | Verdict |
|-------------|---------|-----------------|-------------|---------|
| WCDMA Band2 | 9262    | 1852.4          | 22.48       | PASS    |
| WCDMA Band2 | 9400    | 1880            | 22.43       | PASS    |
| WCDMA Band2 | 9538    | 1907.6          | 22.35       | PASS    |
| WCDMA Band4 | 1312    | 1712.4          | 22.45       | PASS    |
| WCDMA Band4 | 1413    | 1732.6          | 22.70       | PASS    |
| WCDMA Band4 | 1513    | 1752.6          | 22.70       | PASS    |
| WCDMA Band5 | 4132    | 826.4           | 22.47       | PASS    |
| WCDMA Band5 | 4182    | 836.4           | 22.41       | PASS    |
| WCDMA Band5 | 4233    | 846.6           | 22.30       | PASS    |


### 03 Peak-to-Average Ratio

| Band        | Channel | Frequency (MHz) | Result (dB) | high Limit (dB) | Verdict |
|-------------|---------|-----------------|-------------|-----------------|---------|
| WCDMA Band2 | 9262    | 1852.4          | 2.94        | 13              | PASS    |
| WCDMA Band2 | 9400    | 1880            | 2.96        | 13              | PASS    |
| WCDMA Band2 | 9538    | 1907.6          | 2.90        | 13              | PASS    |
| WCDMA Band4 | 1312    | 1712.4          | 3.02        | 13              | PASS    |
| WCDMA Band4 | 1413    | 1732.6          | 3.06        | 13              | PASS    |
| WCDMA Band4 | 1513    | 1752.6          | 2.96        | 13              | PASS    |
| WCDMA Band5 | 4132    | 826.4           | 2.78        | 13              | PASS    |
| WCDMA Band5 | 4182    | 836.4           | 3.09        | 13              | PASS    |
| WCDMA Band5 | 4233    | 846.6           | 3.05        | 13              | PASS    |


WCDMA Band2 Channel=9262

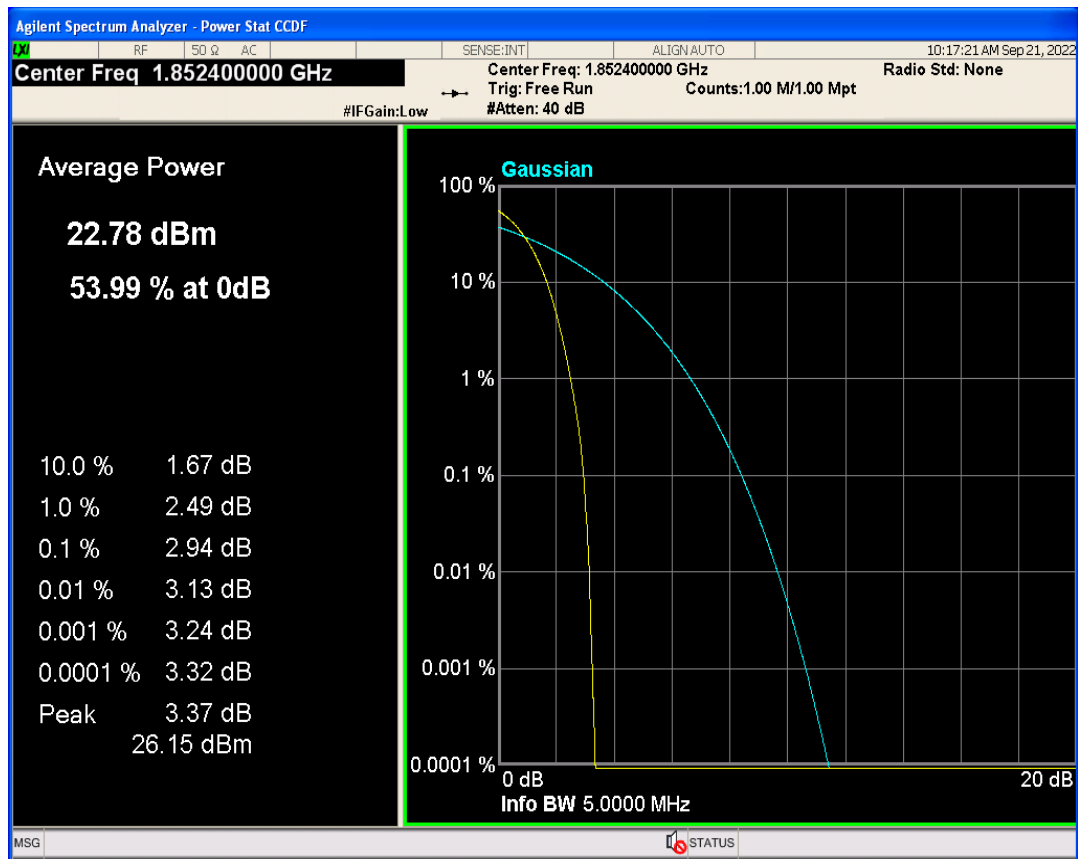

WCDMA Band2 Channel=9538

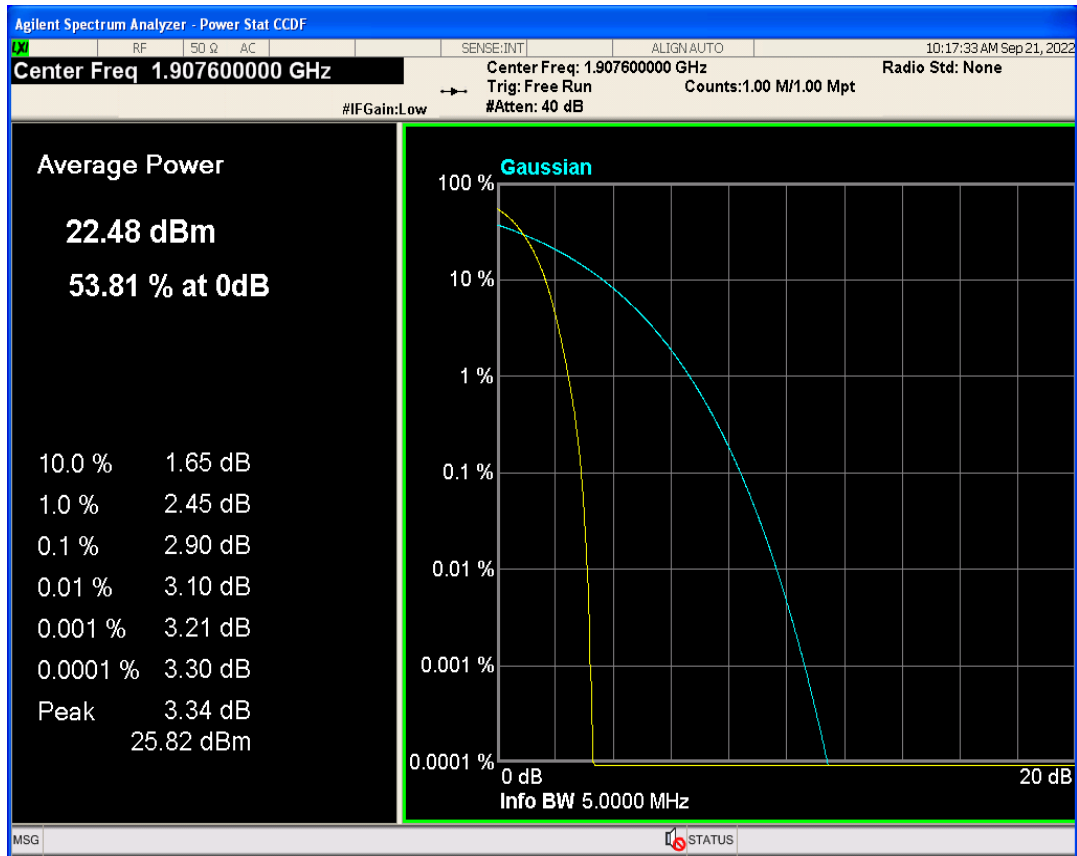


WCDMA Band2 Channel=9400

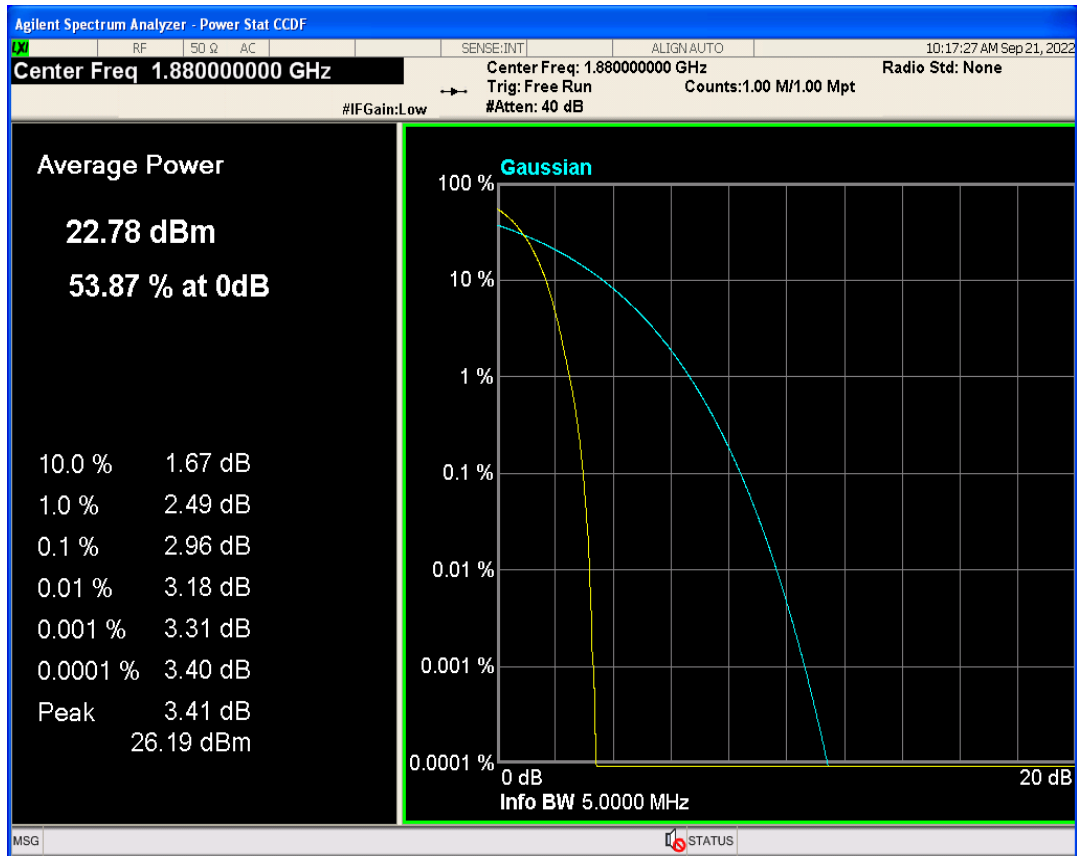

WCDMA Band4 Channel=1312




WCDMA Band4 Channel=1513

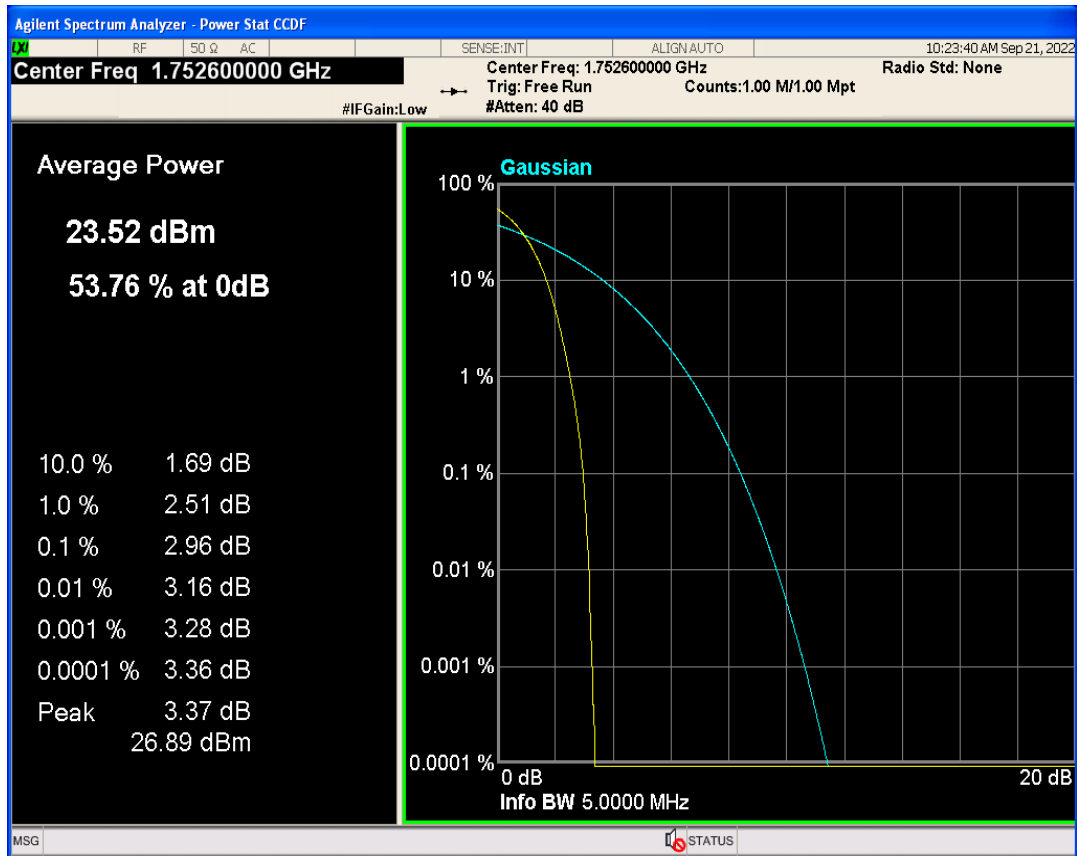

WCDMA Band4 Channel=1413




WCDMA Band5 Channel=4182

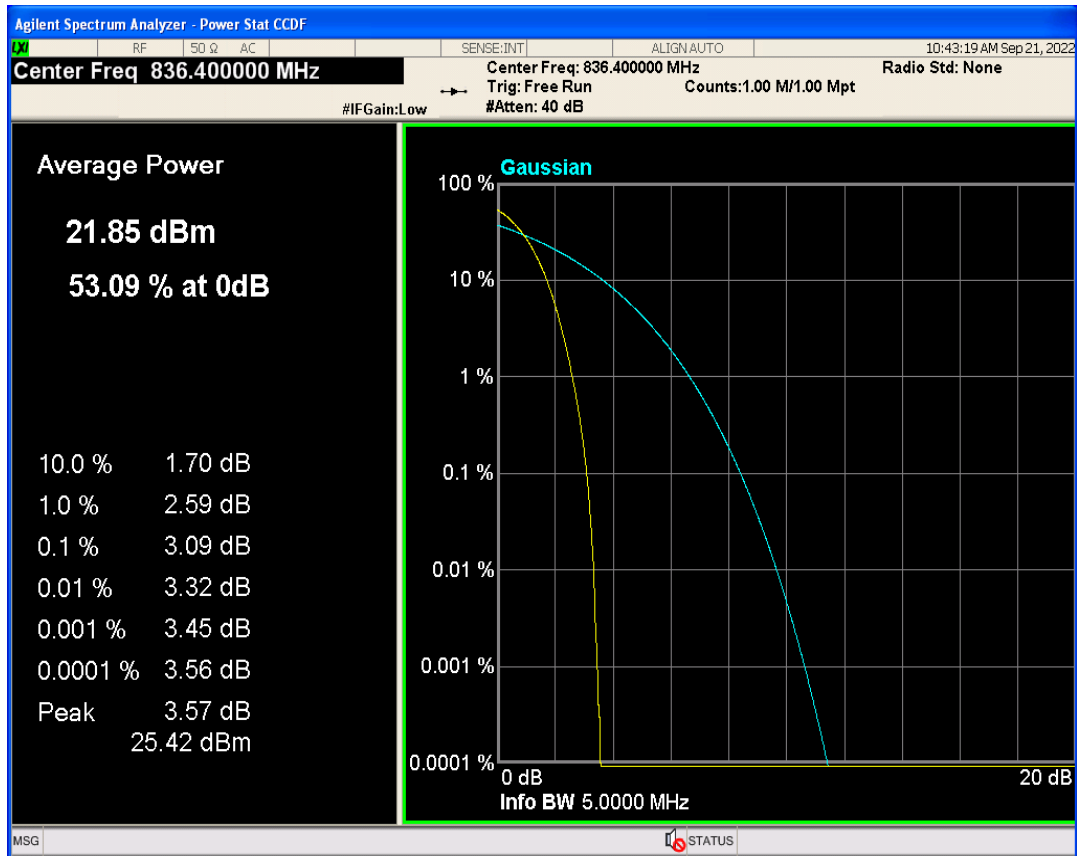

WCDMA Band5 Channel=4132




WCDMA Band5 Channel=4233

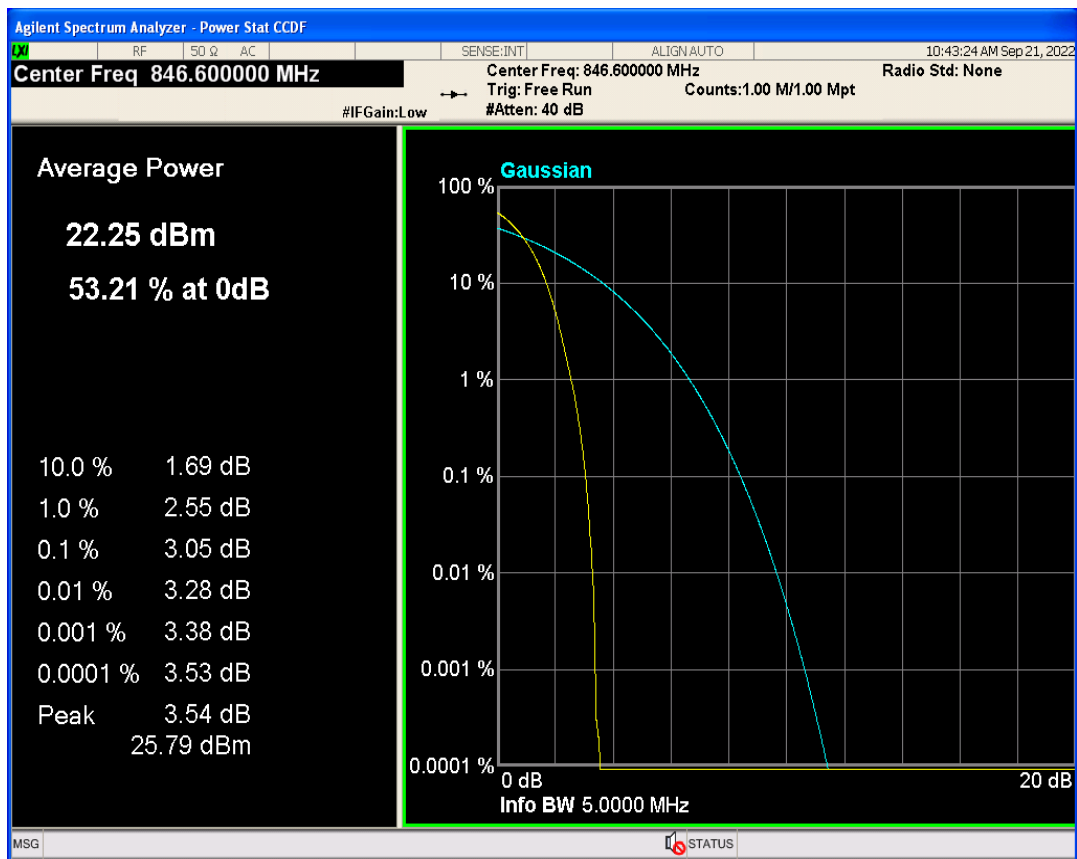


#### 04 Occupied bandwidth

| Band        | Channel | Frequency (MHz) | 99% OBW (kHz) | -26dB EBW (kHz) | Verdict |
|-------------|---------|-----------------|---------------|-----------------|---------|
| WCDMA Band2 | 9262    | 1852.4          | 4137.995      | 4671.661        | PASS    |
| WCDMA Band2 | 9400    | 1880            | 4161.515      | 4674.796        | PASS    |
| WCDMA Band2 | 9538    | 1907.6          | 4152.706      | 4669.261        | PASS    |
| WCDMA Band4 | 1312    | 1712.4          | 4145.719      | 4663.041        | PASS    |
| WCDMA Band4 | 1413    | 1732.6          | 4153.084      | 4653.935        | PASS    |
| WCDMA Band4 | 1513    | 1752.6          | 4174.696      | 4666.289        | PASS    |
| WCDMA Band5 | 4132    | 826.4           | 4150.397      | 4682.084        | PASS    |
| WCDMA Band5 | 4182    | 836.4           | 4164.794      | 4693.644        | PASS    |
| WCDMA Band5 | 4233    | 846.6           | 4159.104      | 4684.077        | PASS    |


WCDMA Band2 Channel=9400

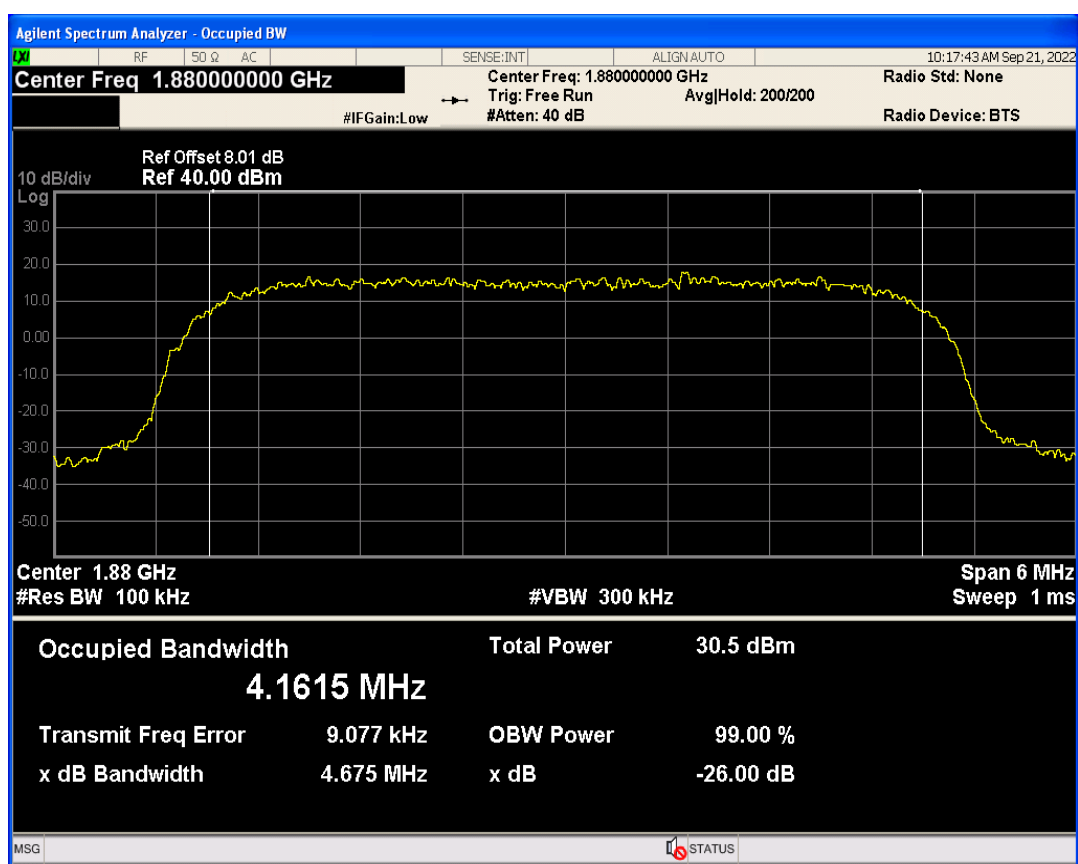


WCDMA Band2 Channel=9262

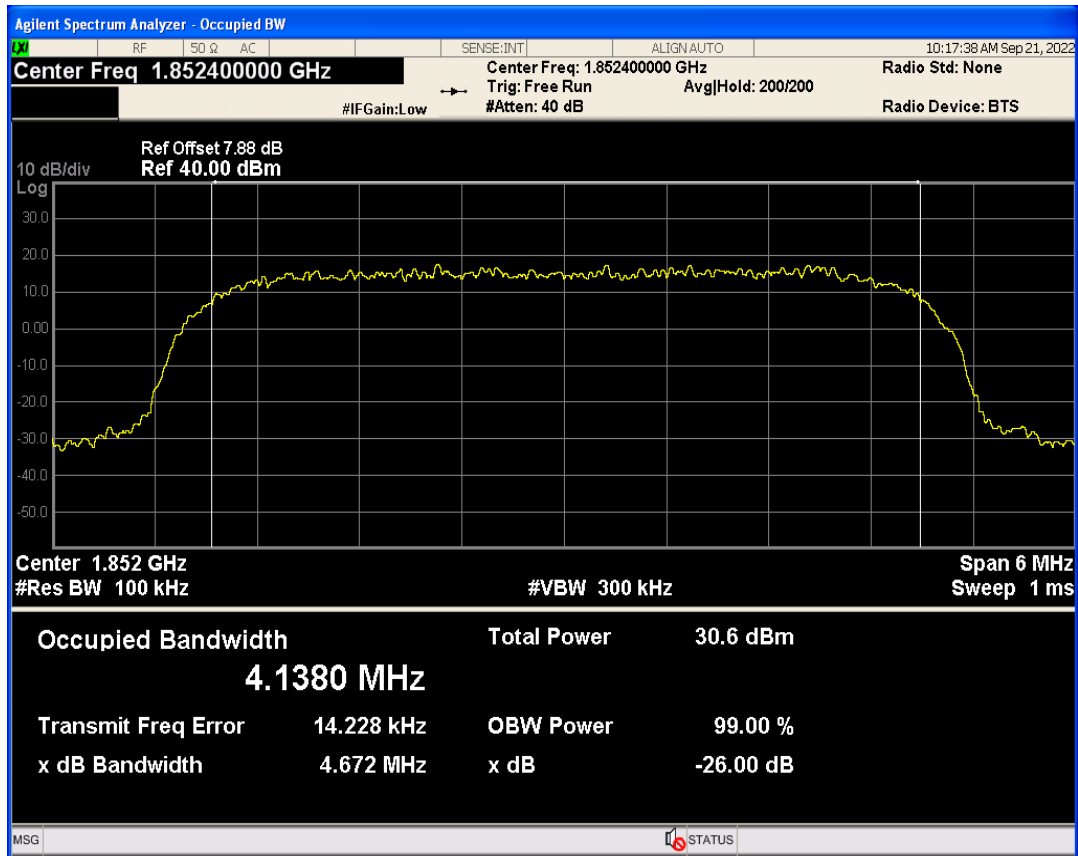


WCDMA Band2 Channel=9538

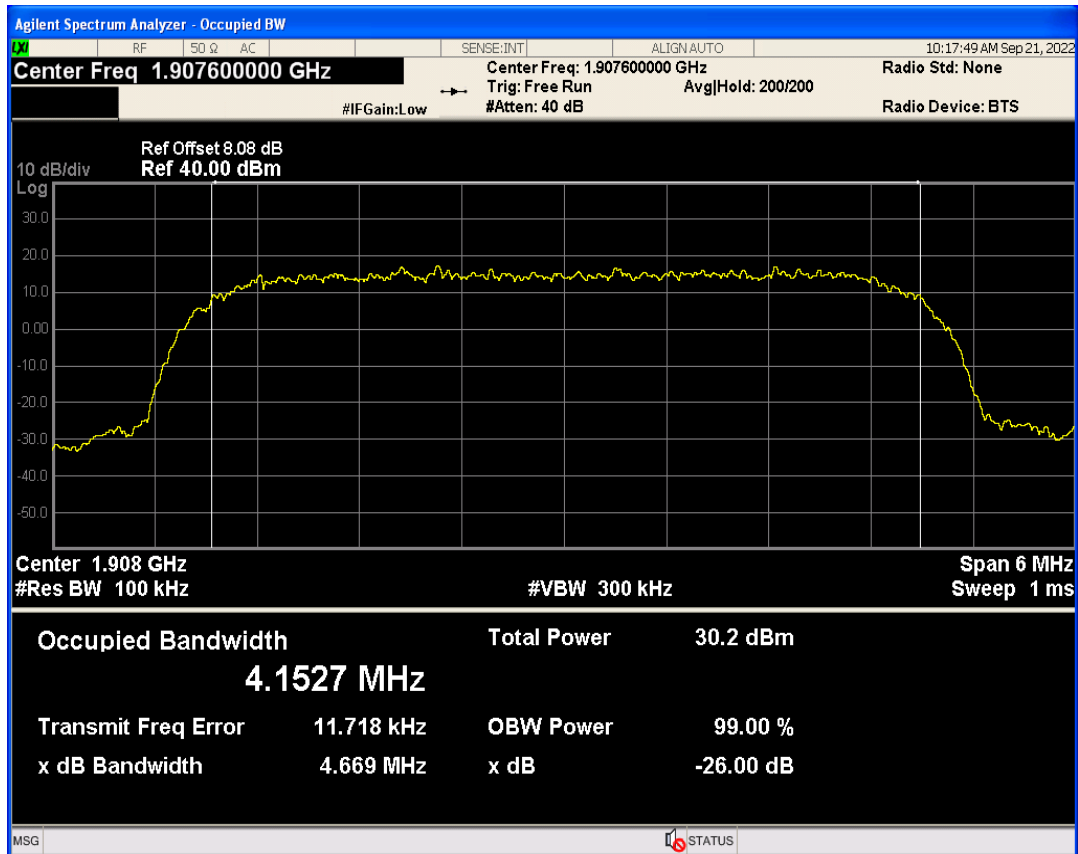


WCDMA Band4 Channel=1312

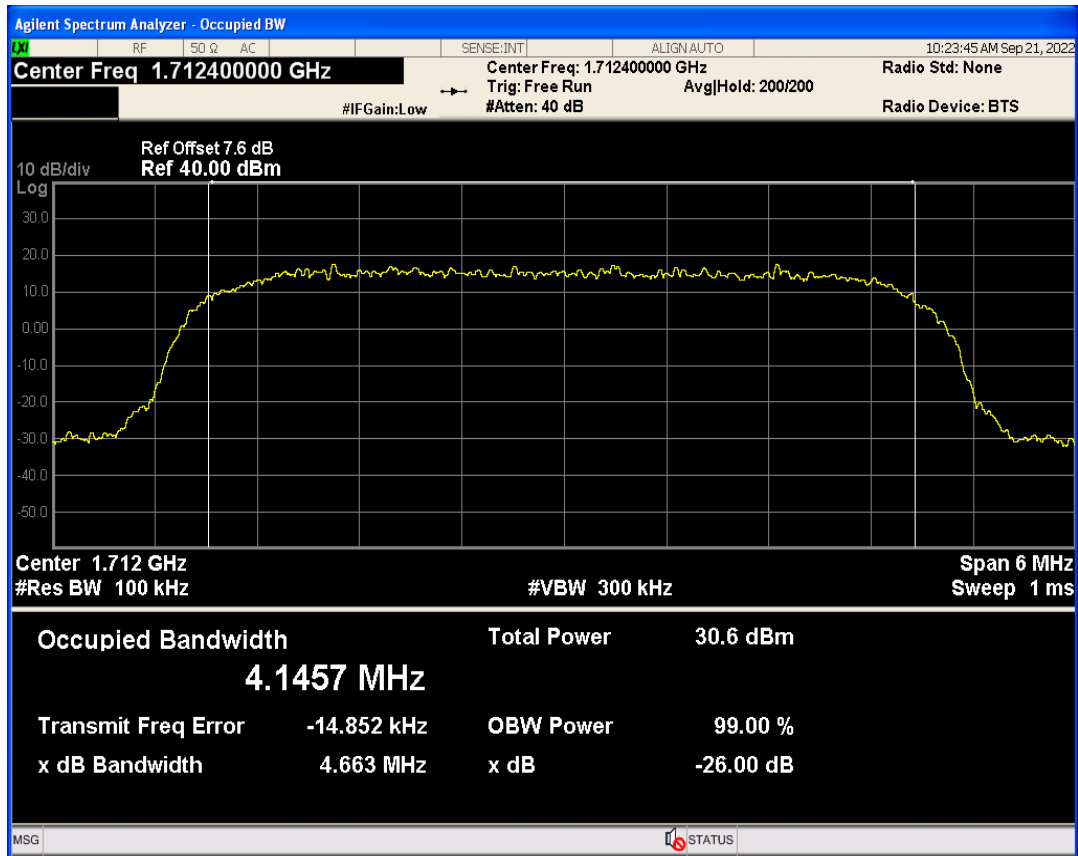


WCDMA Band4 Channel=1513

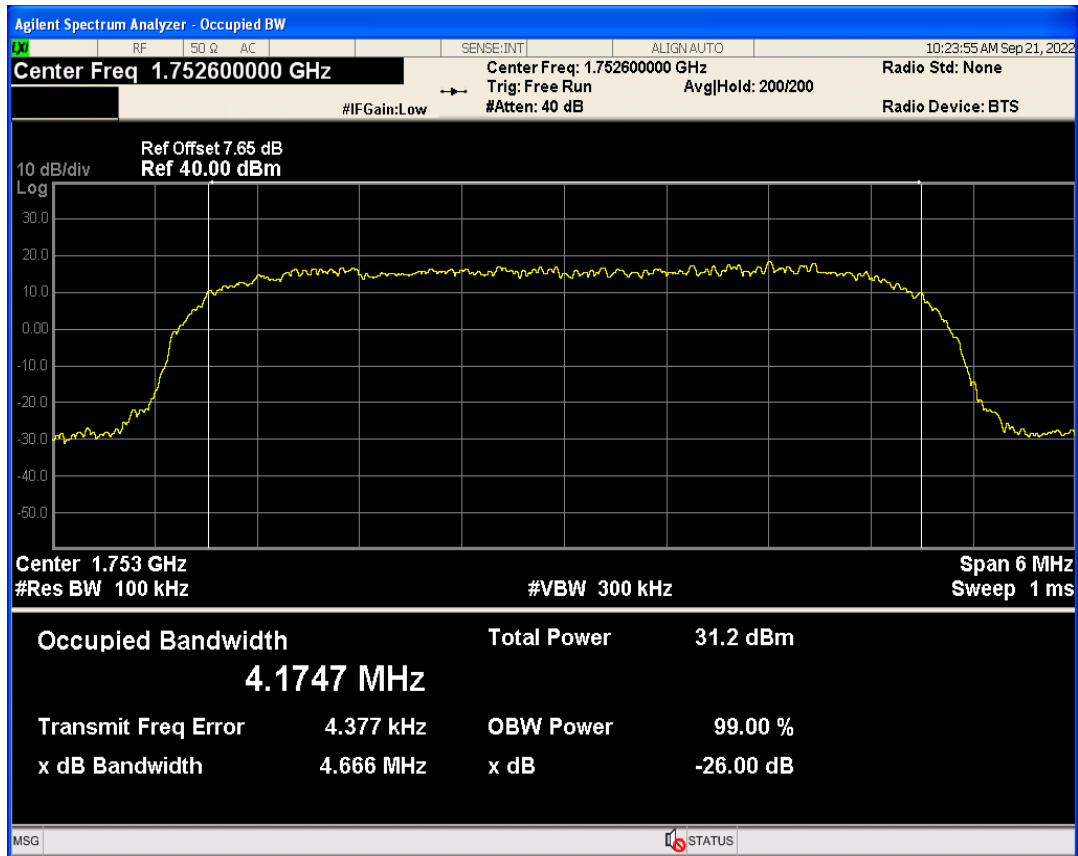


## WCDMA Band4 Channel=1413

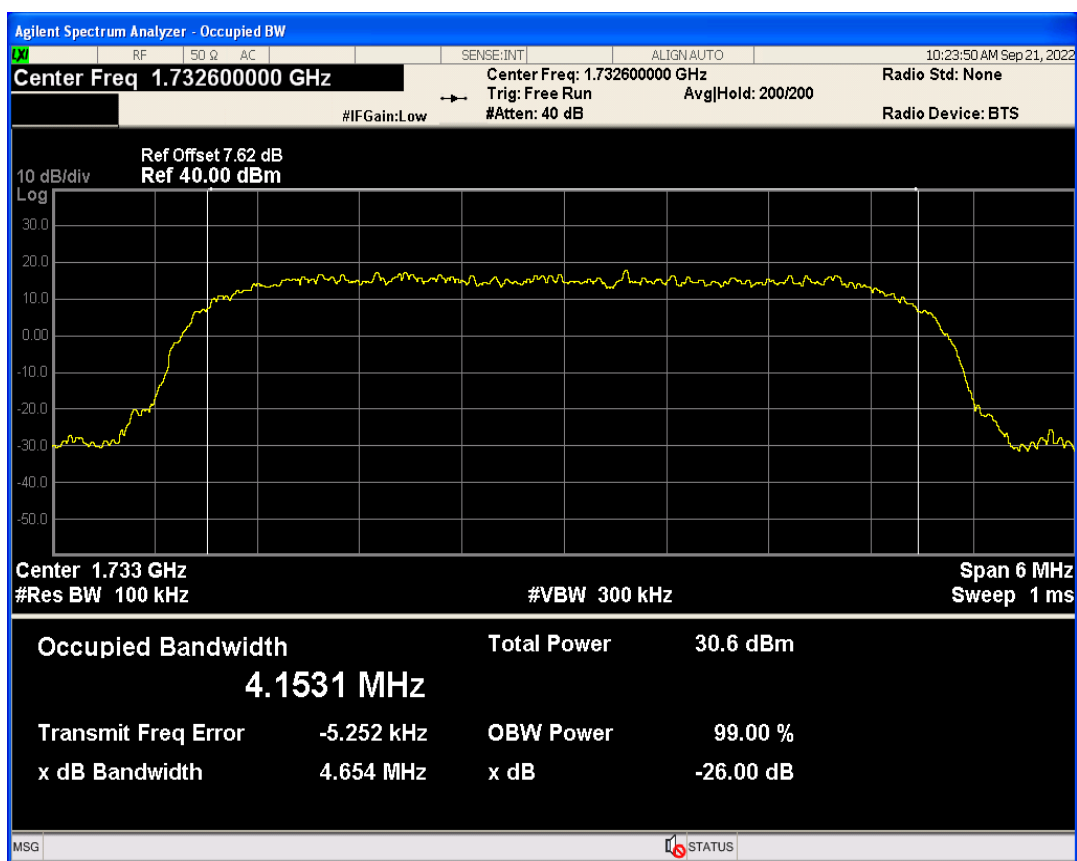


## WCDMA Band5 Channel=4182

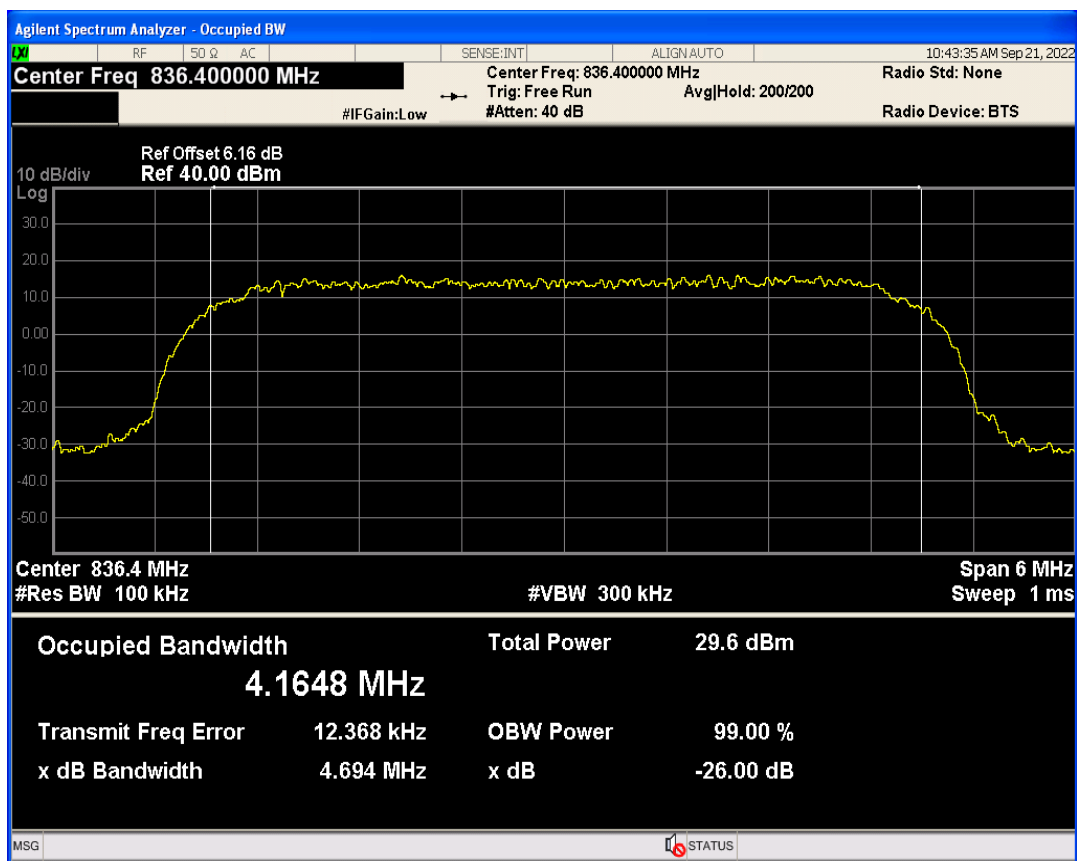

WCDMA Band5 Channel=4132

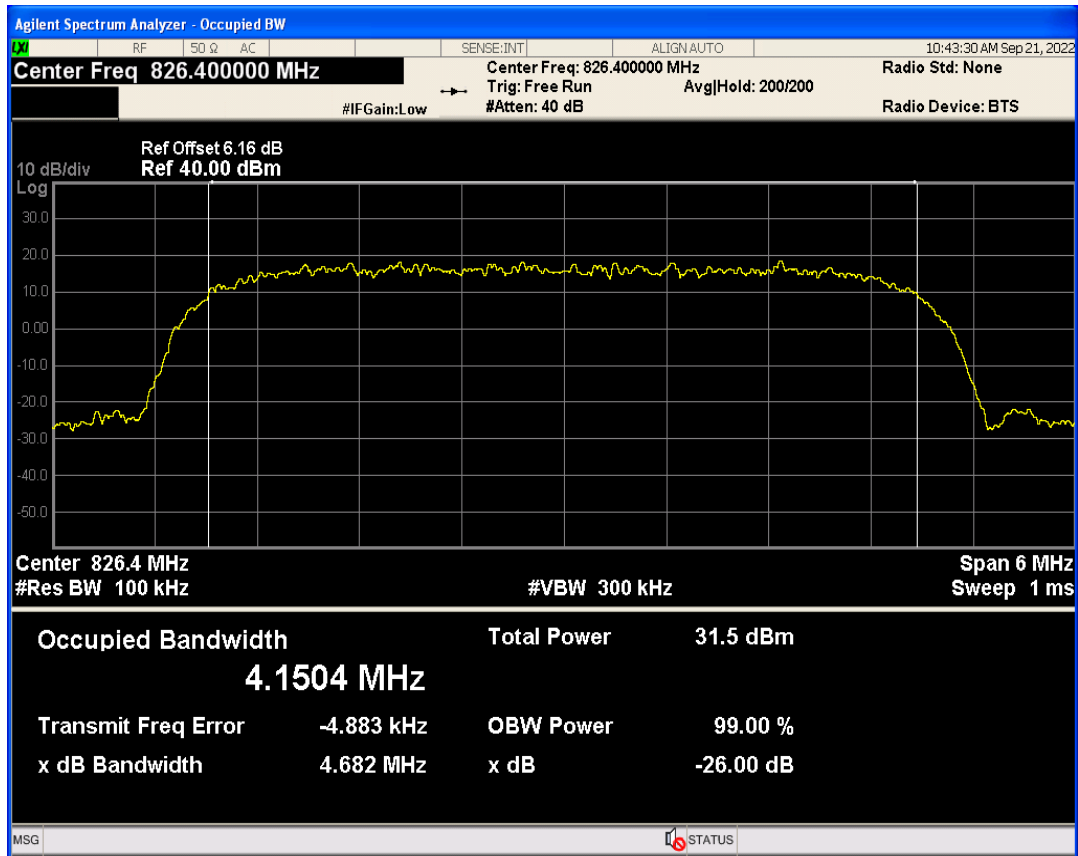


WCDMA Band5 Channel=4233

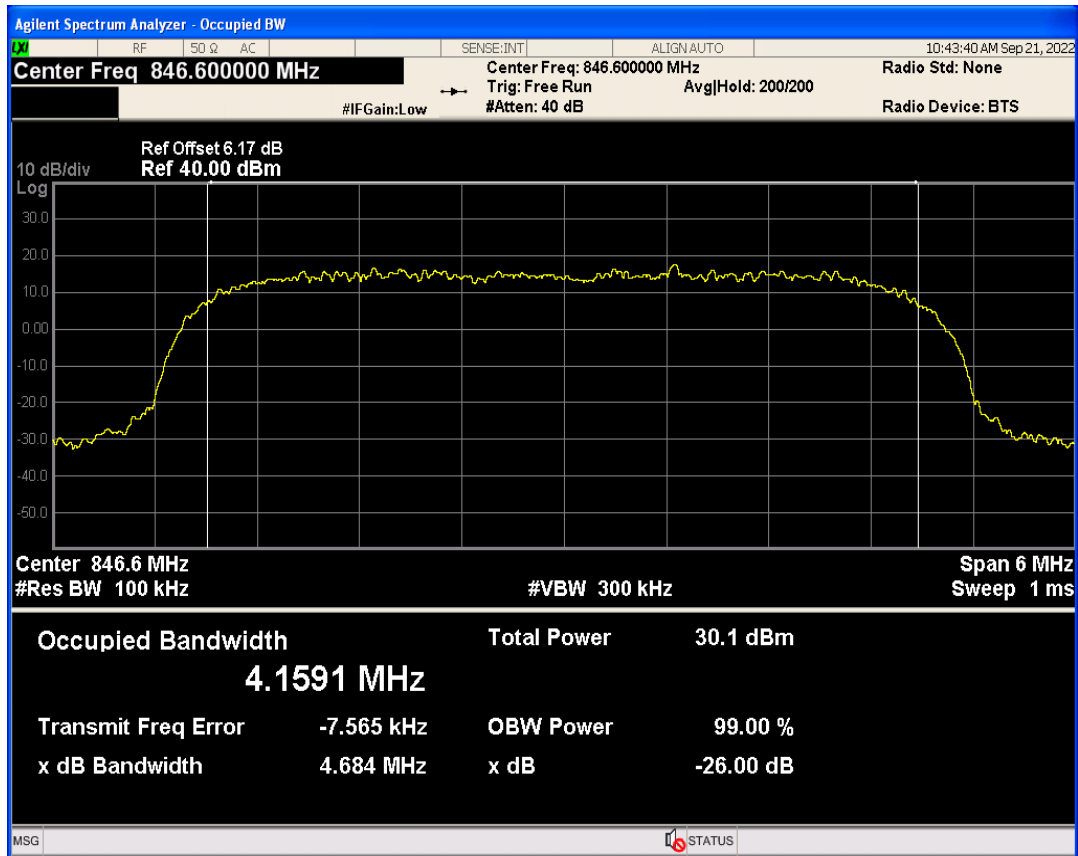

## 05 Band edge

| Band        | Channel | Frequency (MHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) | Verdict |
|-------------|---------|-----------------|-----------------|------------------|-------------|---------|
| WCDMA Band2 | 9262    | 1852.4          | 1850.00         | -26.28           | -13         | PASS    |
| WCDMA Band2 | 9538    | 1907.6          | 1910.00         | -24.74           | -13         | PASS    |
| WCDMA Band4 | 1312    | 1712.4          | 1710.00         | -26.09           | -13         | PASS    |
| WCDMA Band4 | 1513    | 1752.6          | 1755.00         | -25.56           | -13         | PASS    |
| WCDMA Band5 | 4132    | 826.4           | 824.00          | -23.90           | -13         | PASS    |
| WCDMA Band5 | 4233    | 846.6           | 849.00          | -27.51           | -13         | PASS    |


WCDMA Band2 Channel=9262

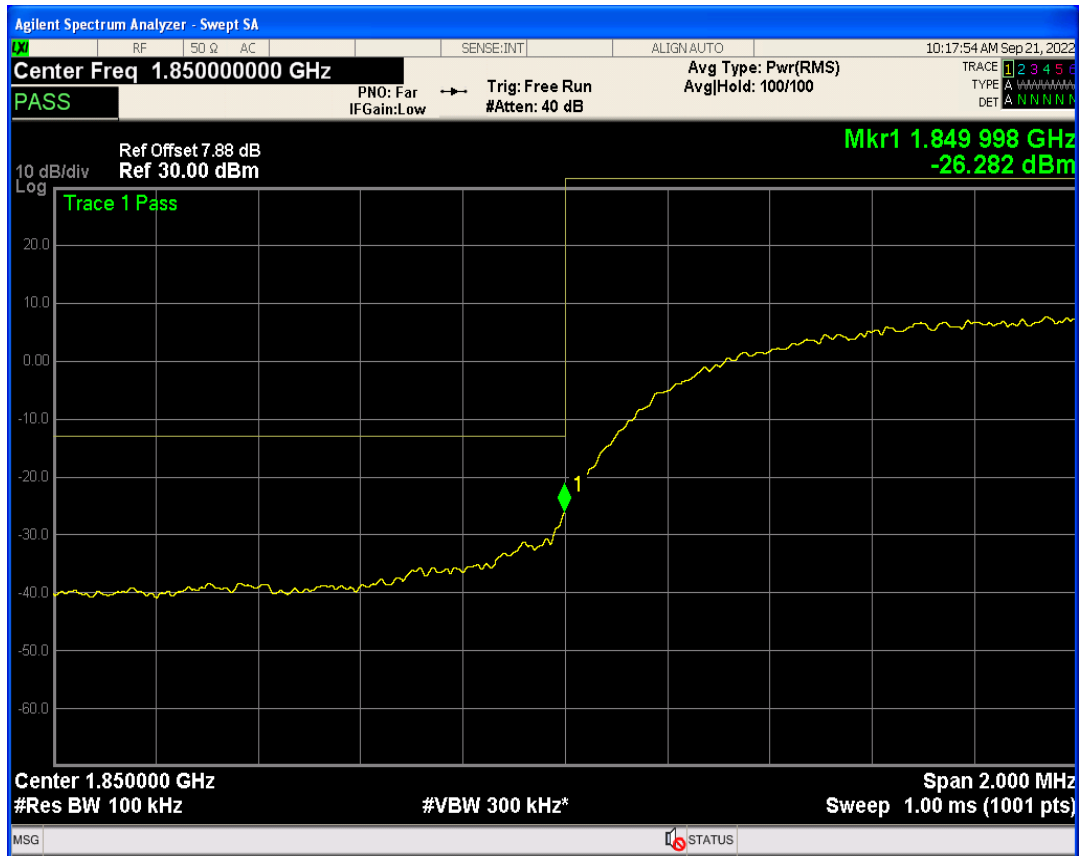


WCDMA Band2 Channel=9538




WCDMA Band4 Channel=1513

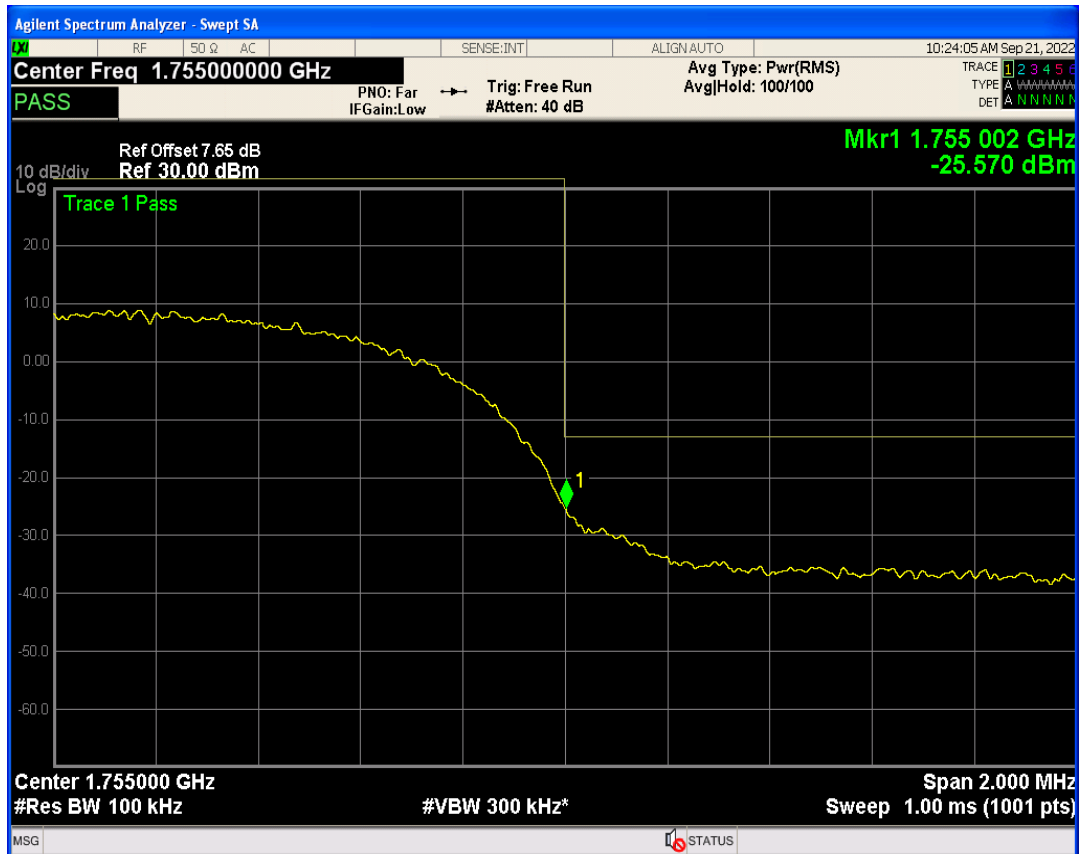

WCDMA Band4 Channel=1312

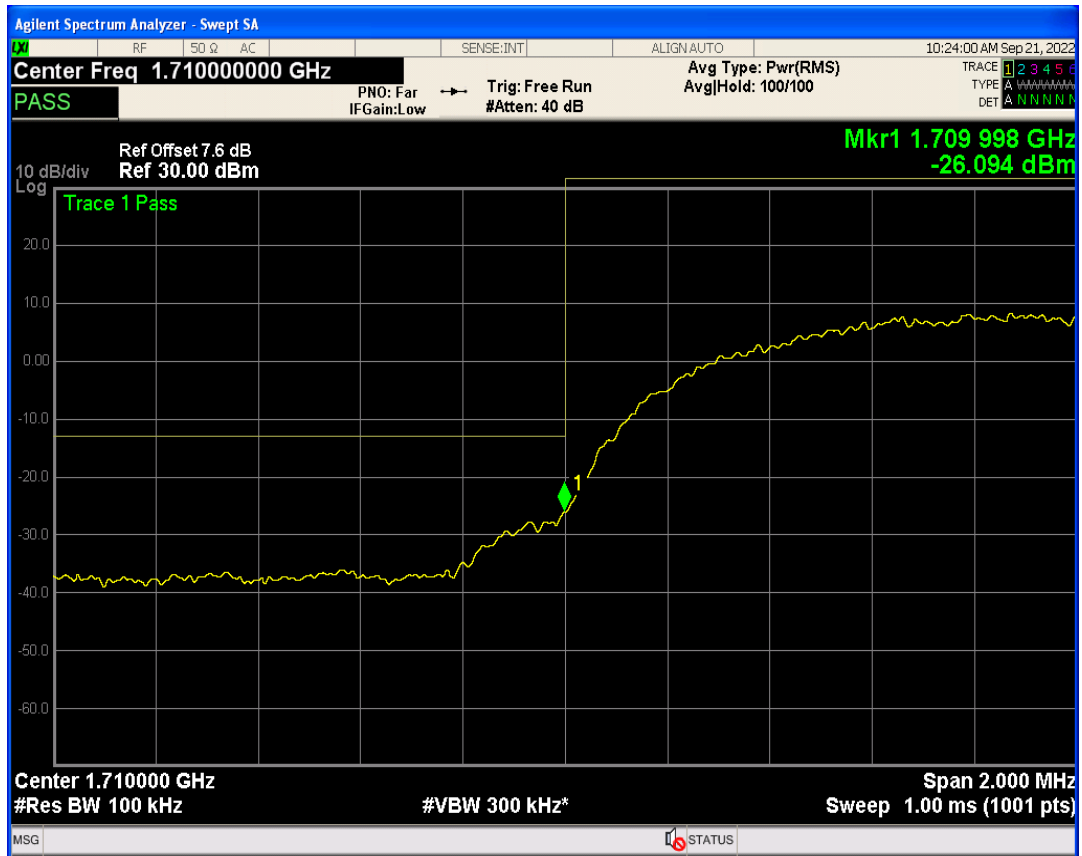

WCDMA Band5 Channel=4132

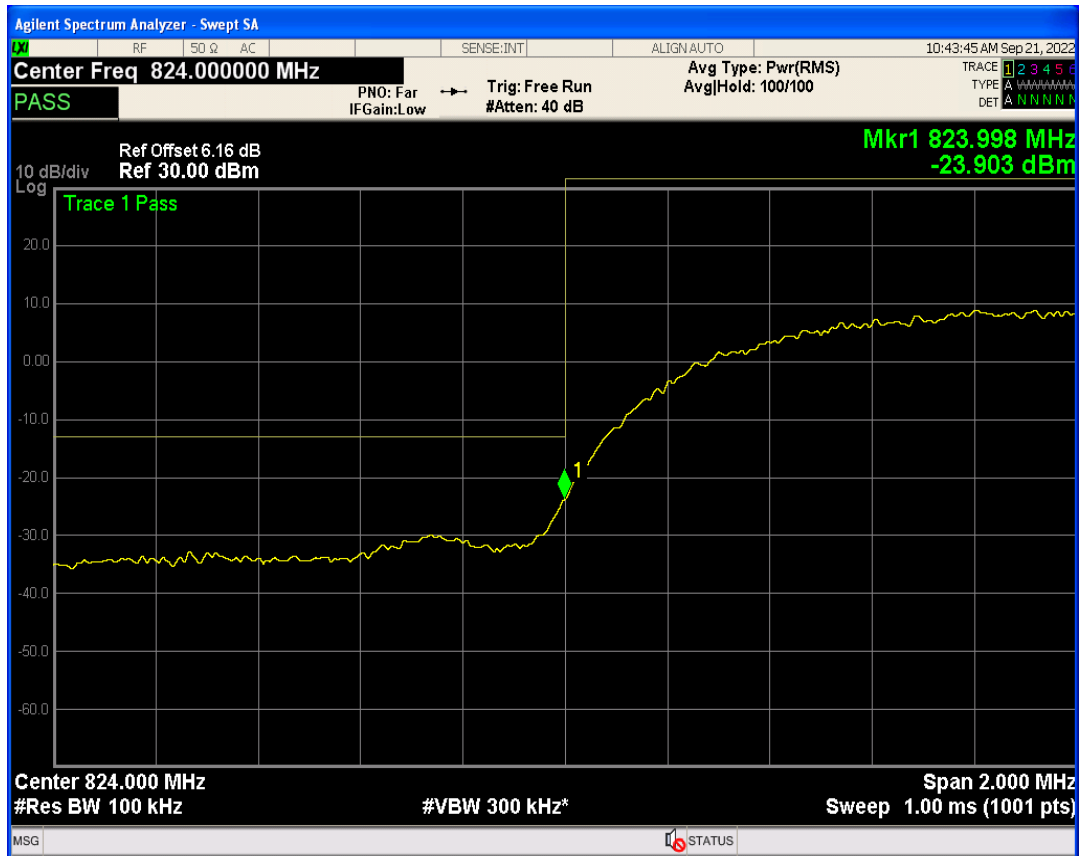


WCDMA Band5 Channel=4233




## 06 Out-of-band emissions

| Band        | Channel | Frequency (MHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) | Verdict |
|-------------|---------|-----------------|-----------------|------------------|-------------|---------|
| WCDMA Band2 | 9262    | 1852.4          | 19954.07        | -24.22           | -13         | PASS    |
| WCDMA Band2 | 9400    | 1880            | 17839.75        | -23.61           | -13         | PASS    |
| WCDMA Band2 | 9538    | 1907.6          | 19833.25        | -23.73           | -13         | PASS    |
| WCDMA Band4 | 1312    | 1712.4          | 18509.74        | -23.76           | -13         | PASS    |
| WCDMA Band4 | 1413    | 1732.6          | 19886.67        | -23.79           | -13         | PASS    |
| WCDMA Band4 | 1513    | 1752.6          | 18437.85        | -23.41           | -13         | PASS    |
| WCDMA Band5 | 4132    | 826.4           | 2774.99         | -29.81           | -13         | PASS    |
| WCDMA Band5 | 4182    | 836.4           | 3278.48         | -29.89           | -13         | PASS    |
| WCDMA Band5 | 4233    | 846.6           | 3152.35         | -29.82           | -13         | PASS    |


WCDMA Band2 Channel=9400

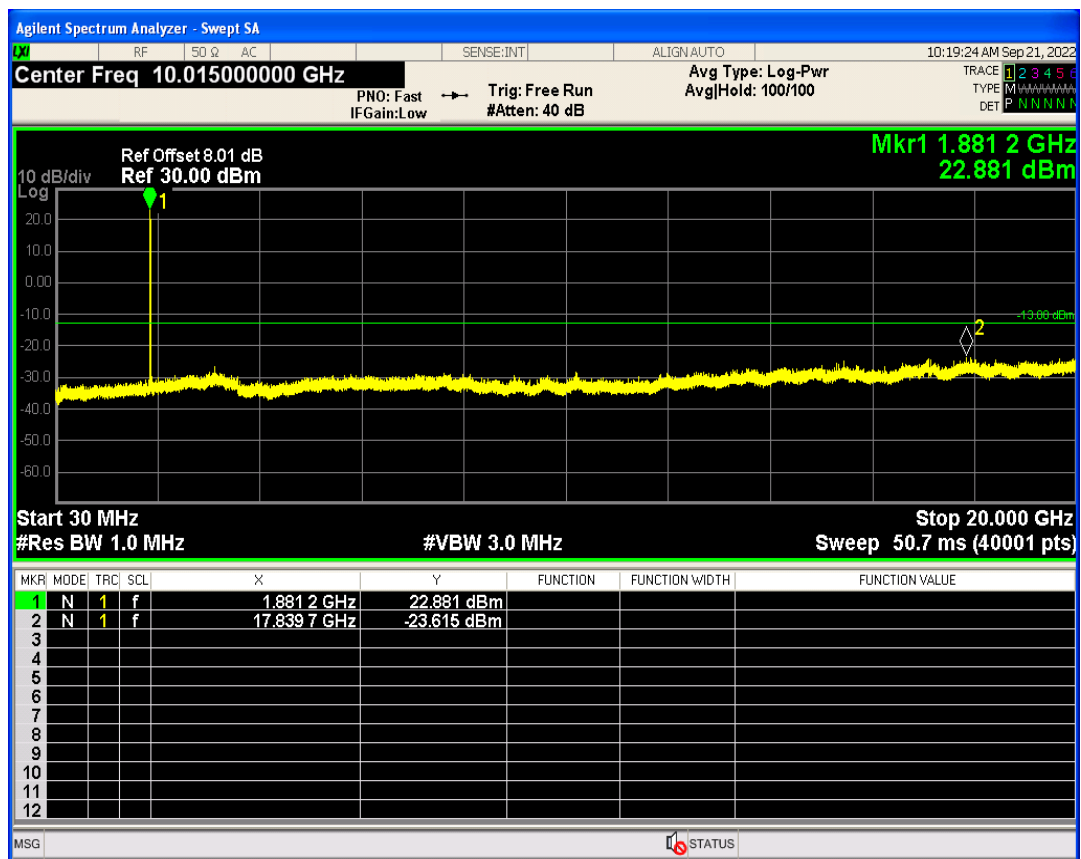


WCDMA Band2 Channel=9262

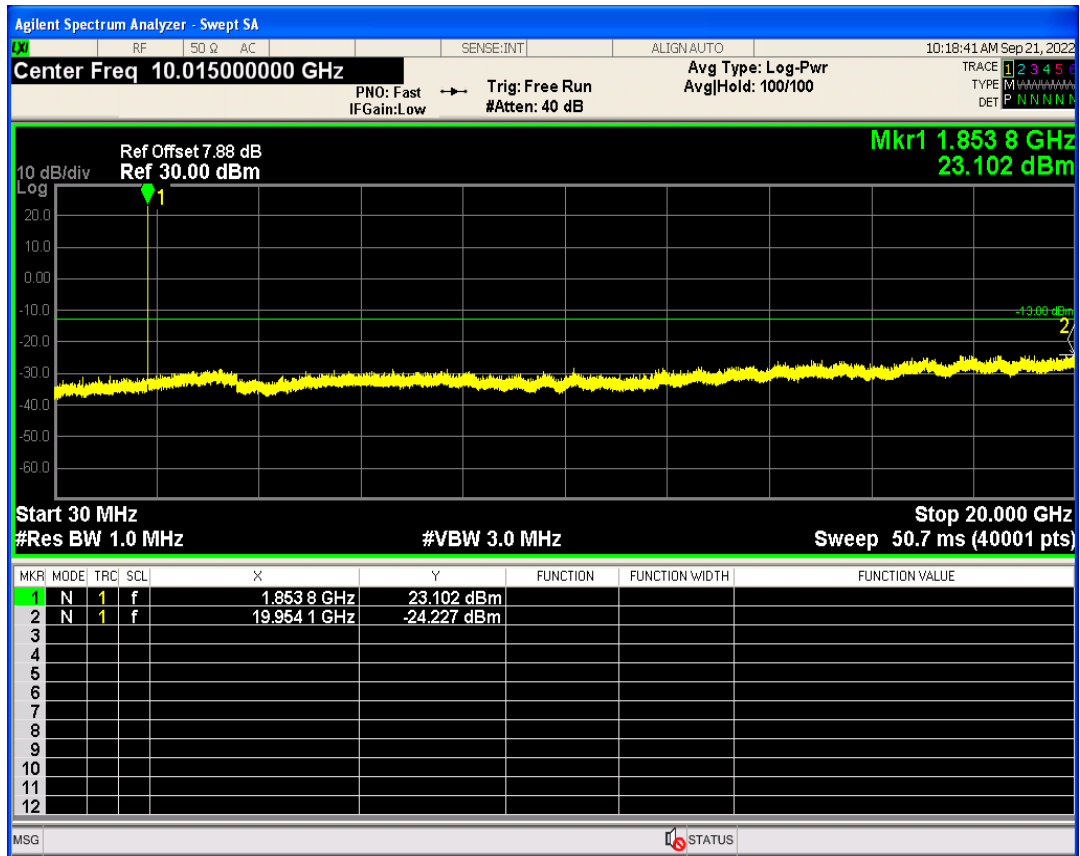


WCDMA Band2 Channel=9538

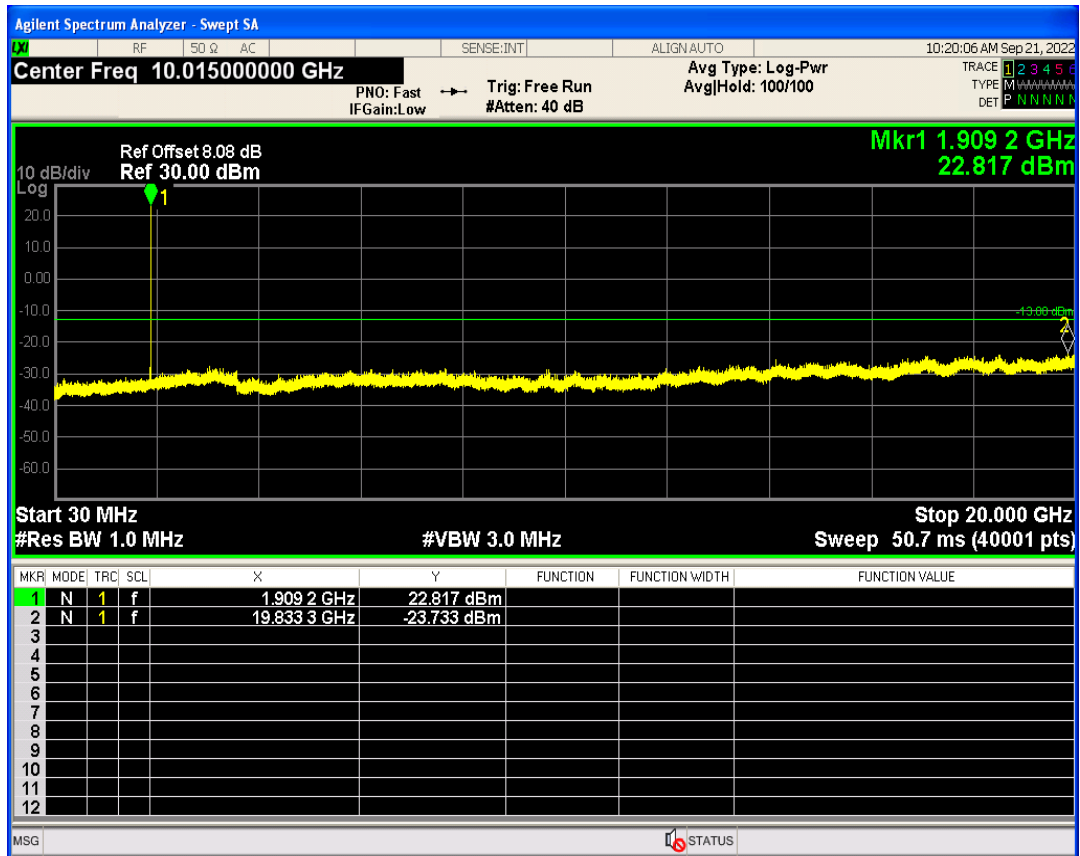


WCDMA Band4 Channel=1312

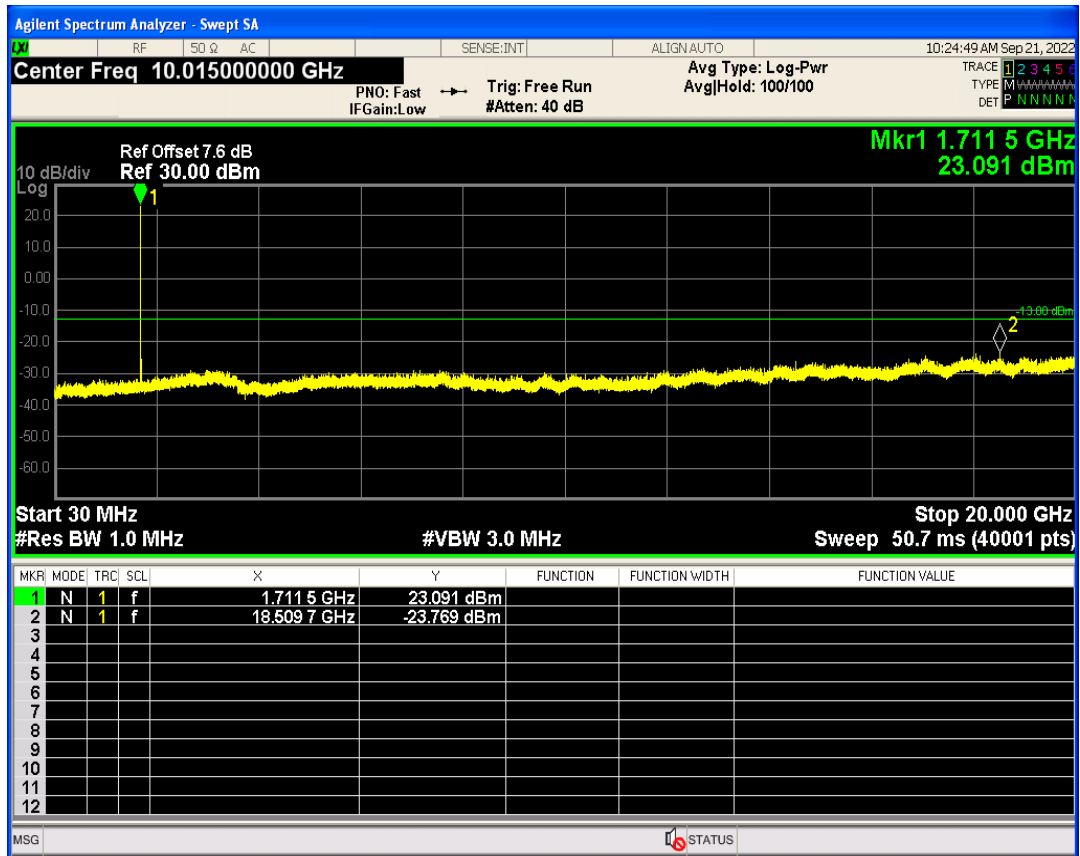


WCDMA Band4 Channel=1413

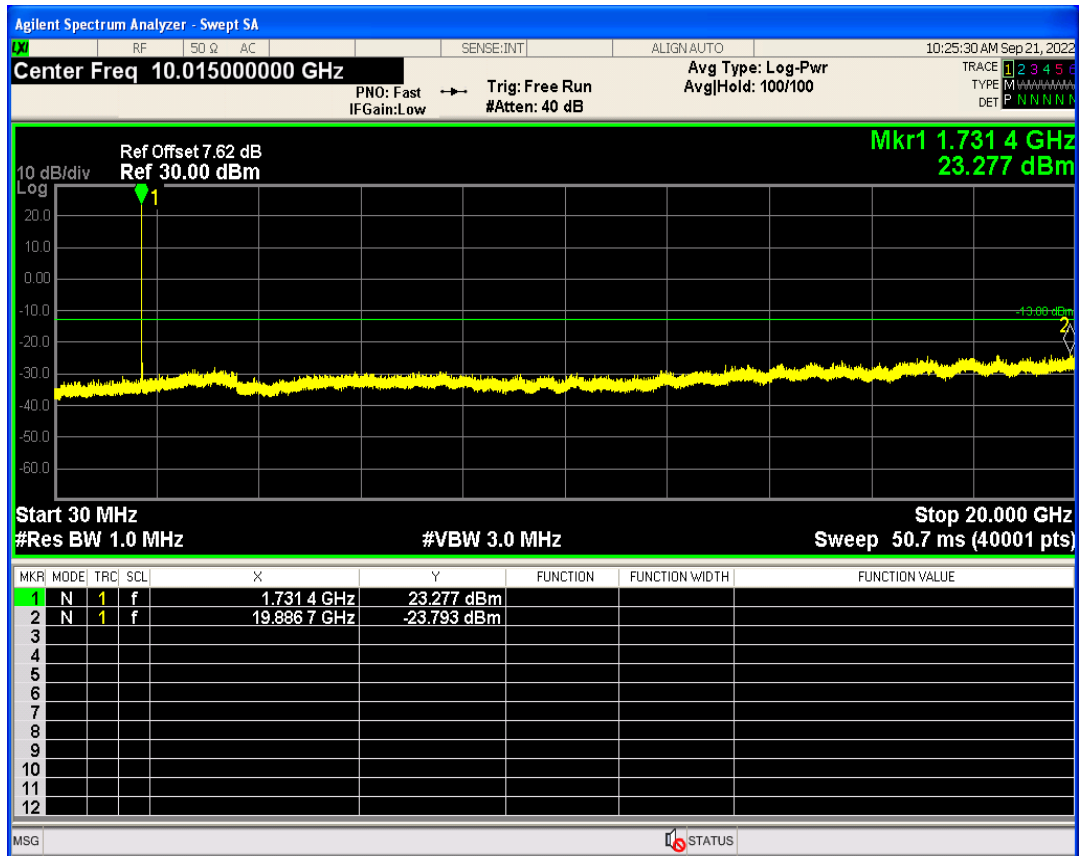


WCDMA Band4 Channel=1513

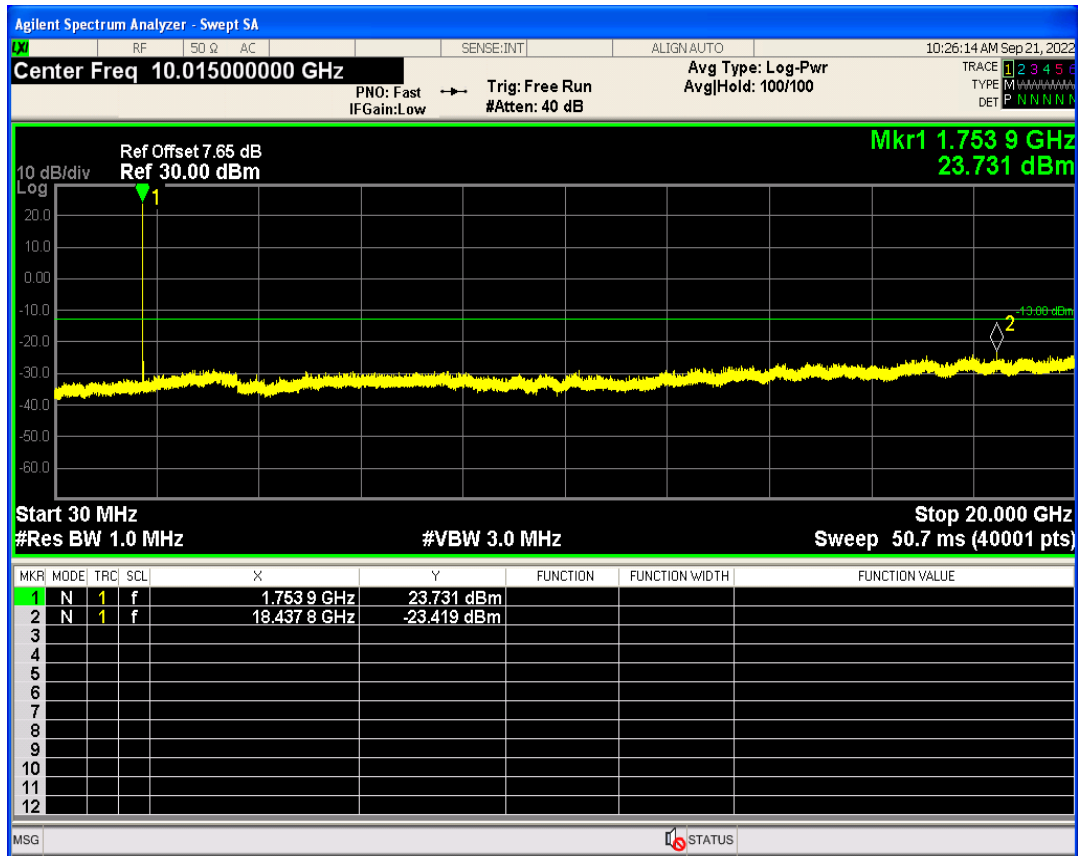


WCDMA Band5 Channel=4132

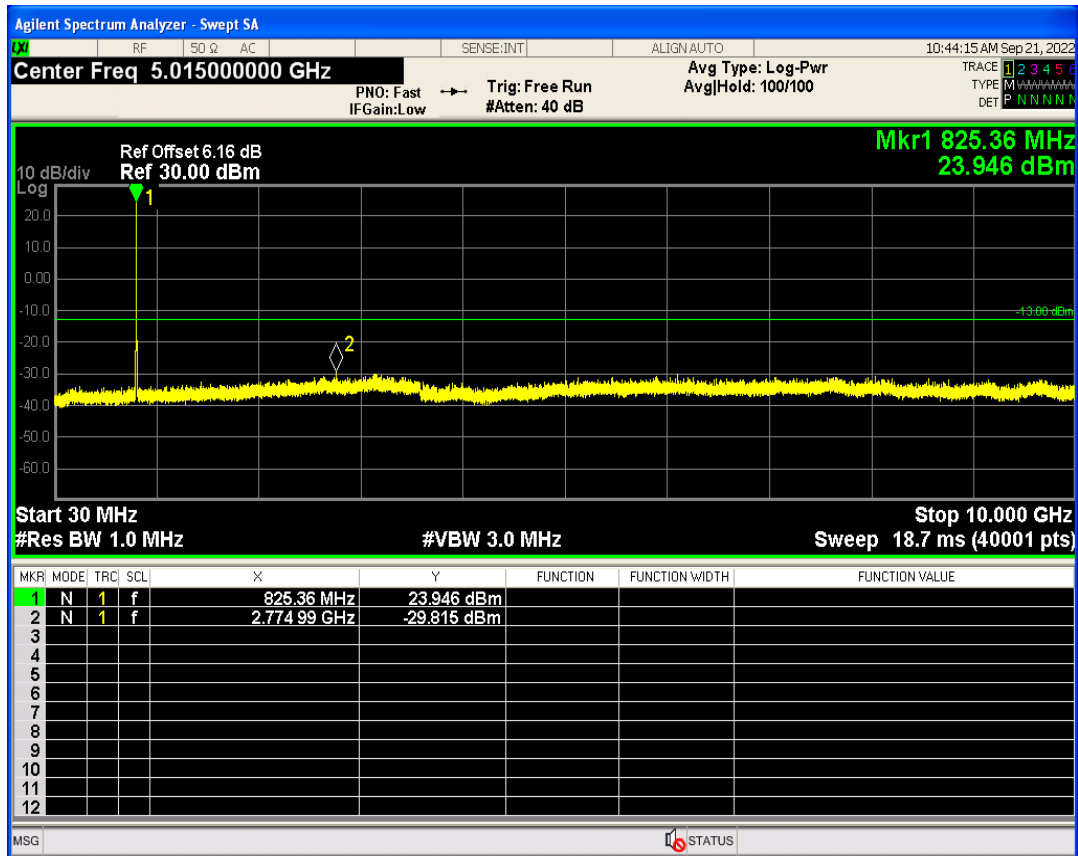

WCDMA Band5 Channel=4182

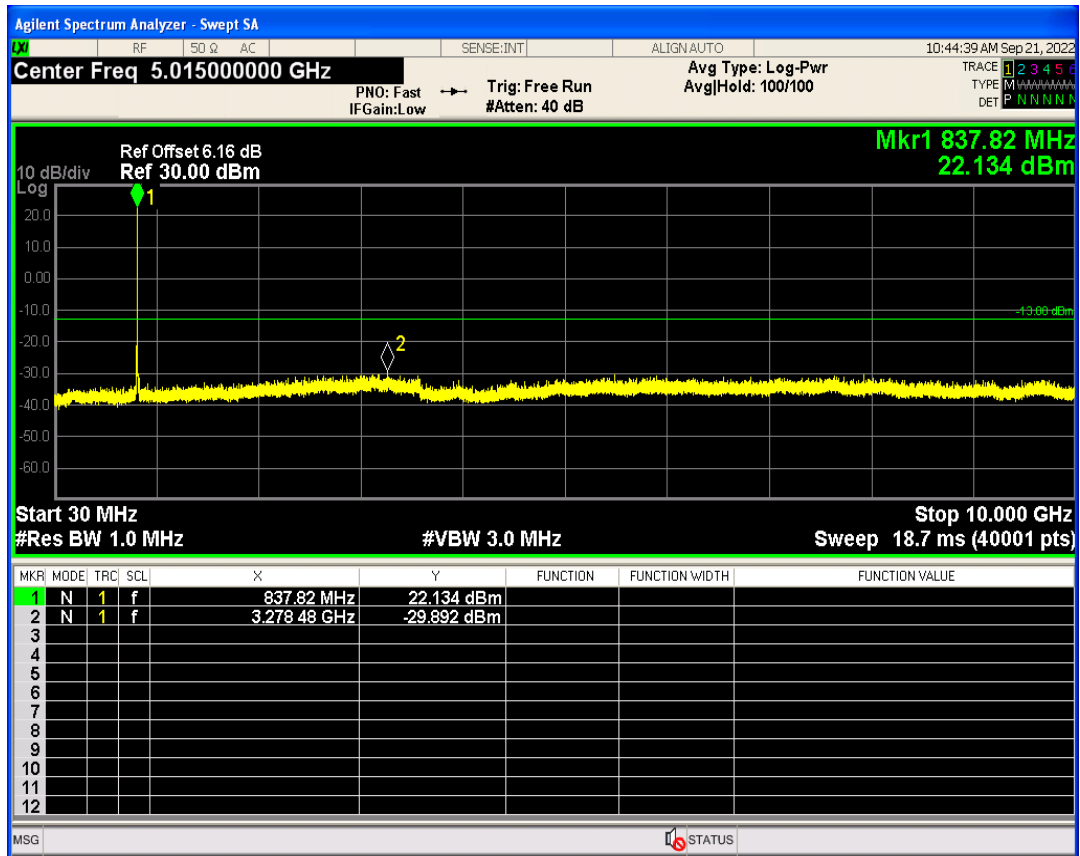

WCDMA Band5 Channel=4233

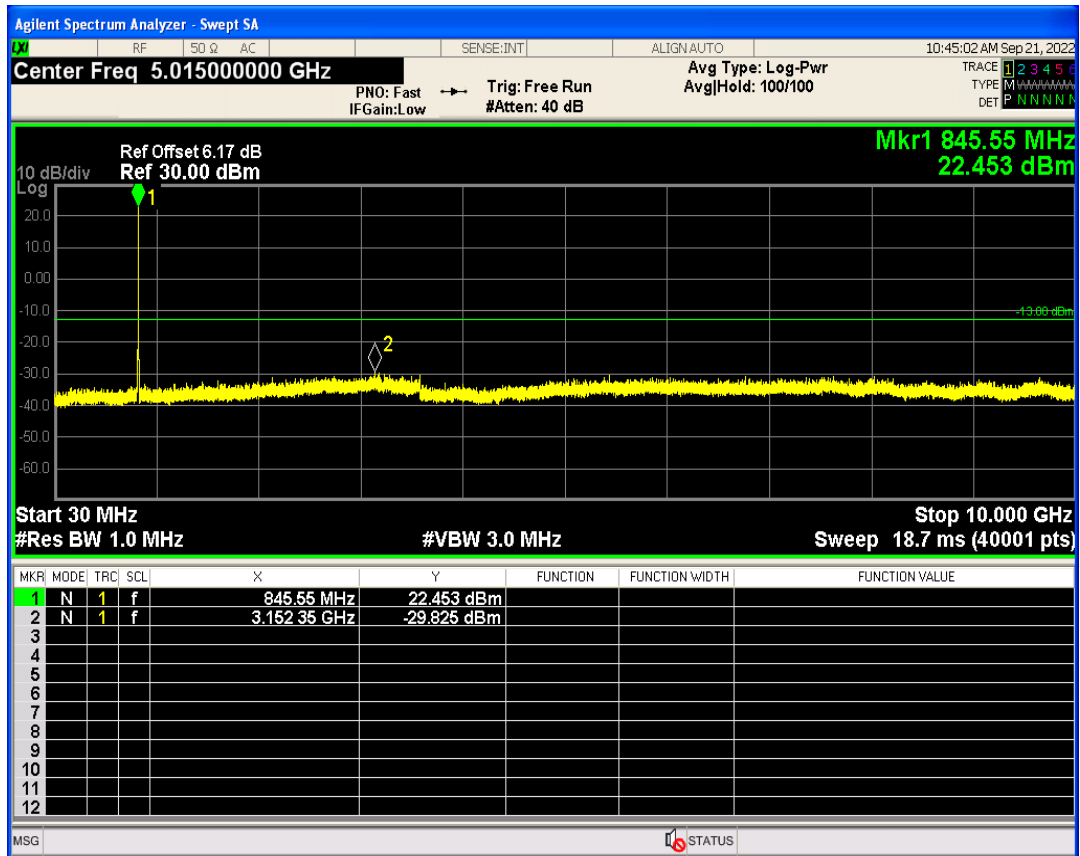

### 07 Conducted output power

| Band                 | Channel | Frequency (MHz) | Power (dBm) | Verdict |
|----------------------|---------|-----------------|-------------|---------|
| HSDPA Band2 Subtest1 | 9262    | 1852.4          | 22.33       | PASS    |
| HSDPA Band2 Subtest2 | 9262    | 1852.4          | 21.98       | PASS    |
| HSDPA Band2 Subtest3 | 9262    | 1852.4          | 21.81       | PASS    |
| HSDPA Band2 Subtest4 | 9262    | 1852.4          | 21.38       | PASS    |
| HSDPA Band2 Subtest1 | 9400    | 1880            | 22.22       | PASS    |
| HSDPA Band2 Subtest2 | 9400    | 1880            | 21.94       | PASS    |
| HSDPA Band2 Subtest3 | 9400    | 1880            | 21.58       | PASS    |
| HSDPA Band2 Subtest4 | 9400    | 1880            | 21.53       | PASS    |
| HSDPA Band2 Subtest1 | 9538    | 1907.6          | 22.21       | PASS    |
| HSDPA Band2 Subtest2 | 9538    | 1907.6          | 21.94       | PASS    |
| HSDPA Band2 Subtest3 | 9538    | 1907.6          | 21.61       | PASS    |
| HSDPA Band2 Subtest4 | 9538    | 1907.6          | 21.49       | PASS    |
| HSDPA Band5 Subtest1 | 4132    | 826.4           | 22.01       | PASS    |
| HSDPA Band5 Subtest2 | 4132    | 826.4           | 21.70       | PASS    |
| HSDPA Band5 Subtest3 | 4132    | 826.4           | 21.41       | PASS    |
| HSDPA Band5 Subtest4 | 4132    | 826.4           | 21.31       | PASS    |
| HSDPA Band5 Subtest1 | 4182    | 836.4           | 21.72       | PASS    |
| HSDPA Band5 Subtest2 | 4182    | 836.4           | 21.50       | PASS    |
| HSDPA Band5 Subtest3 | 4182    | 836.4           | 21.03       | PASS    |
| HSDPA Band5 Subtest4 | 4182    | 836.4           | 21.17       | PASS    |
| HSDPA Band5 Subtest1 | 4233    | 846.6           | 21.68       | PASS    |
| HSDPA Band5 Subtest2 | 4233    | 846.6           | 21.51       | PASS    |
| HSDPA Band5 Subtest3 | 4233    | 846.6           | 21.19       | PASS    |
| HSDPA Band5 Subtest4 | 4233    | 846.6           | 20.88       | PASS    |

### 13 Conducted output power

| Band                 | Channel | Frequency (MHz) | Power (dBm) | Verdict |
|----------------------|---------|-----------------|-------------|---------|
| HSUPA Band2 Subtest1 | 9262    | 1852.4          | 22.14       | PASS    |
| HSUPA Band2 Subtest2 | 9262    | 1852.4          | 22.18       | PASS    |
| HSUPA Band2 Subtest3 | 9262    | 1852.4          | 21.74       | PASS    |
| HSUPA Band2 Subtest4 | 9262    | 1852.4          | 22.22       | PASS    |
| HSUPA Band2 Subtest5 | 9262    | 1852.4          | 21.93       | PASS    |
| HSUPA Band2 Subtest1 | 9400    | 1880            | 21.96       | PASS    |
| HSUPA Band2 Subtest2 | 9400    | 1880            | 22.19       | PASS    |
| HSUPA Band2 Subtest3 | 9400    | 1880            | 21.64       | PASS    |
| HSUPA Band2 Subtest4 | 9400    | 1880            | 22.19       | PASS    |
| HSUPA Band2 Subtest5 | 9400    | 1880            | 21.79       | PASS    |
| HSUPA Band2 Subtest1 | 9538    | 1907.6          | 22.06       | PASS    |
| HSUPA Band2 Subtest2 | 9538    | 1907.6          | 22.16       | PASS    |
| HSUPA Band2 Subtest3 | 9538    | 1907.6          | 21.84       | PASS    |
| HSUPA Band2 Subtest4 | 9538    | 1907.6          | 22.04       | PASS    |
| HSUPA Band2 Subtest5 | 9538    | 1907.6          | 21.96       | PASS    |

|                      |      |        |       |      |
|----------------------|------|--------|-------|------|
| HSUPA Band4 Subtest1 | 1312 | 1712.4 | 21.86 | PASS |
| HSUPA Band4 Subtest2 | 1312 | 1712.4 | 21.97 | PASS |
| HSUPA Band4 Subtest3 | 1312 | 1712.4 | 21.47 | PASS |
| HSUPA Band4 Subtest4 | 1312 | 1712.4 | 21.76 | PASS |
| HSUPA Band4 Subtest5 | 1312 | 1712.4 | 21.45 | PASS |
| HSUPA Band4 Subtest1 | 1413 | 1732.6 | 22.02 | PASS |
| HSUPA Band4 Subtest2 | 1413 | 1732.6 | 22.26 | PASS |
| HSUPA Band4 Subtest3 | 1413 | 1732.6 | 21.82 | PASS |
| HSUPA Band4 Subtest4 | 1413 | 1732.6 | 22.21 | PASS |
| HSUPA Band4 Subtest5 | 1413 | 1732.6 | 21.95 | PASS |
| HSUPA Band4 Subtest1 | 1513 | 1752.6 | 21.68 | PASS |
| HSUPA Band4 Subtest2 | 1513 | 1752.6 | 21.89 | PASS |
| HSUPA Band4 Subtest3 | 1513 | 1752.6 | 21.71 | PASS |
| HSUPA Band4 Subtest4 | 1513 | 1752.6 | 21.80 | PASS |
| HSUPA Band4 Subtest5 | 1513 | 1752.6 | 21.52 | PASS |
| HSUPA Band5 Subtest1 | 4132 | 826.4  | 21.88 | PASS |
| HSUPA Band5 Subtest2 | 4132 | 826.4  | 21.90 | PASS |
| HSUPA Band5 Subtest3 | 4132 | 826.4  | 21.68 | PASS |
| HSUPA Band5 Subtest4 | 4132 | 826.4  | 21.76 | PASS |
| HSUPA Band5 Subtest5 | 4132 | 826.4  | 21.66 | PASS |
| HSUPA Band5 Subtest1 | 4182 | 836.4  | 21.63 | PASS |
| HSUPA Band5 Subtest2 | 4182 | 836.4  | 21.70 | PASS |
| HSUPA Band5 Subtest3 | 4182 | 836.4  | 21.56 | PASS |
| HSUPA Band5 Subtest4 | 4182 | 836.4  | 21.73 | PASS |
| HSUPA Band5 Subtest5 | 4182 | 836.4  | 21.51 | PASS |
| HSUPA Band5 Subtest1 | 4233 | 846.6  | 21.37 | PASS |
| HSUPA Band5 Subtest2 | 4233 | 846.6  | 21.65 | PASS |
| HSUPA Band5 Subtest3 | 4233 | 846.6  | 21.38 | PASS |
| HSUPA Band5 Subtest4 | 4233 | 846.6  | 21.67 | PASS |
| HSUPA Band5 Subtest5 | 4233 | 846.6  | 21.37 | PASS |