



**Radio Systems Corporation
FCC Part 15, Certification Application
Model FT-303**

Original Issue Date: January 17, 2006

**3505 Francis Circle Alpharetta, GA 30004
PH: 770-740-0717 Fax: 770-740-1508
www.ustech-lab.com**

MEASUREMENT/TECHNICAL REPORT

COMPANY NAME: Radio Systems Corporation
MODEL: FT-303

FCC ID: KE3-FT303

ORIGINAL ISSUE DATE: January 17, 2006

This report concerns (check one): Original grant X
Class II change _____

Equipment type: **Low Power Transmitter**

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? yes _____ No X

If yes, defer until: _____
date

N.A. agrees to notify the Commission by N.A.
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Report prepared by:

United States Technologies, Inc.
3505 Francis Circle
Alpharetta, GA 30004

Phone Number: (770) 740-0717
Fax Number: (770) 740-1508

TABLE OF CONTENTS

AGENCY AGREEMENT LETTER OF CONFIDENTIALITY

SECTION 1

GENERAL INFORMATION

Product Description

SECTION 2

TESTS AND MEASUREMENTS

Configuration of Tested
Test Facility
Test Equipment
Modifications
Periodic Operation
Field Strength of Fundamental Emission
Field Strength of Spurious Emissions
20 dB Bandwidth of Fundamental Emission
Frequency Tolerance of Carrier Signal
Radiated Digital Device Emissions
Power Line Conducted Emissions

SECTION 3

LABELING INFORMATION

SECTION 4

BLOCK DIAGRAM(S)/SCHEMATICS

SECTION 5

PHOTOGRAPHS

SECTION 6

USER'S MANUAL

AMENDMENT ANNEX

LIST OF FIGURES AND TABLES

FIGURES

Test Configuration
Photograph(s) for Spurious and Fundamental Emissions
Field Strength of Fundamental Emission
Field Strength of Spurious Emissions
Bandwidth of Fundamental Emission

TABLES

EUT and Peripherals
Test Instruments
Field Strength of Fundamental Emission
Field Strength of Spurious Emissions
Bandwidth of Fundamental Emission
Radiated Emissions
Power Line Conducted Emissions

SECTION 1

GENERAL INFORMATION

GENERAL INFORMATION

Product Description

The Equipment Under Test (EUT) is a Radio Systems Corporation 303.825 MHz Remote Transmitter Models FT-303, which sends a transmitted signal when one of three buttons is pressed.

Related Submittal(s)/Grant(s)

The EUT will be used with DoC approved receivers.

SECTION 2

TESTS AND MEASUREMENTS

TESTS AND MEASUREMENTS

Configuration of Tested System

The sample was tested per ANSI C63.4, Methods of Measurement from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (1992). Conducted and radiated emissions data were taken with the test receiver or spectrum analyzer's resolution bandwidth adjusted to 9 kHz and 120 kHz, respectively. All measurements are peak unless stated otherwise. The video filter associated with the spectrum analyzer was off throughout the evaluation process. Interconnecting cables were manipulated as necessary to maximize emissions. A block diagram of the tested system is shown in Figure 1. Test configuration photographs for spurious and fundamental emissions are shown in Figure 2.

Since the EUT is a hand held device, it was rotated about all 3 axis in order to obtain worse case results.

Test Facility

Testing was performed at US Tech's measurement facility at 3505 Francis Circle, Alpharetta, GA. This site has been fully described and submitted to the FCC, and accepted in their letter marked 31040/SIT. Additionally this site has also been fully described and submitted to Industry Canada (IC), and has been approved under file number IC2982.

Modifications

- 1) No modifications were necessary to bring the EUT into compliance with the Part 15.231 limits

Test Equipment

Table 2 describes test equipment used to evaluate this product.

FIGURE 1
TEST CONFIGURATION




FIGURE 2a

Photographs for Spurious and Fundamental Emissions



FIGURE 2b

Photograph(s) for Spurious and Fundamental Emissions



TABLE 1

EUT and Peripherals

| PERIPHERAL MANUFACTURER | MODEL NUMBER | SERIAL NUMBER | FCC ID: | CABLES P/D |
|---|-----------------|------------------|-----------|---------------|
| Remote Transmitter Radio Systems Corporation (EUT) | FT-303 | None | KE3-FT303 | None |

TABLE 2
TEST INSTRUMENTS


| EQUIPMENT | MODEL NUMBER | MANUFACTURER | SERIAL NUMBER | DATE OF LAST CALIBRATION |
|----------------------|-----------------|-----------------|------------------|-----------------------------|
| SPECTRUM ANALYZER | 8593E | HEWLETT-PACKARD | 3205A00124 | 7/5/05 |
| RF PREAMP | 8447D | HEWLETT-PACKARD | 2944A07436 | Daily Calibration |
| RF PREAMP | 8449B | HEWLETT-PACKARD | 3008A00480 | 6/30/05 |
| HORN ANTENNA | SAS-571 | A.H. Systems | 605 | 4/1/05 |
| LOG PERIODIC ANTENNA | 3136 | EMCO | 9110-3236 | 9/19/05 |
| CALCULATION PROGRAM | N/A | N/A | Ver. 5.2 | N/A |

Periodic Operation (47 CFR 15.231(a1))

A transmitter manually activated must automatically deactivate within not more than 5 seconds of being released. The transmitter is a 3 button transmitter. The EUT continues to transmit while each button is being pressed. The EUT ceases transmission within 300 msec upon being released as shown in Figure 3.

FIGURE 3

Periodic Operation 15.231(a)(c1)

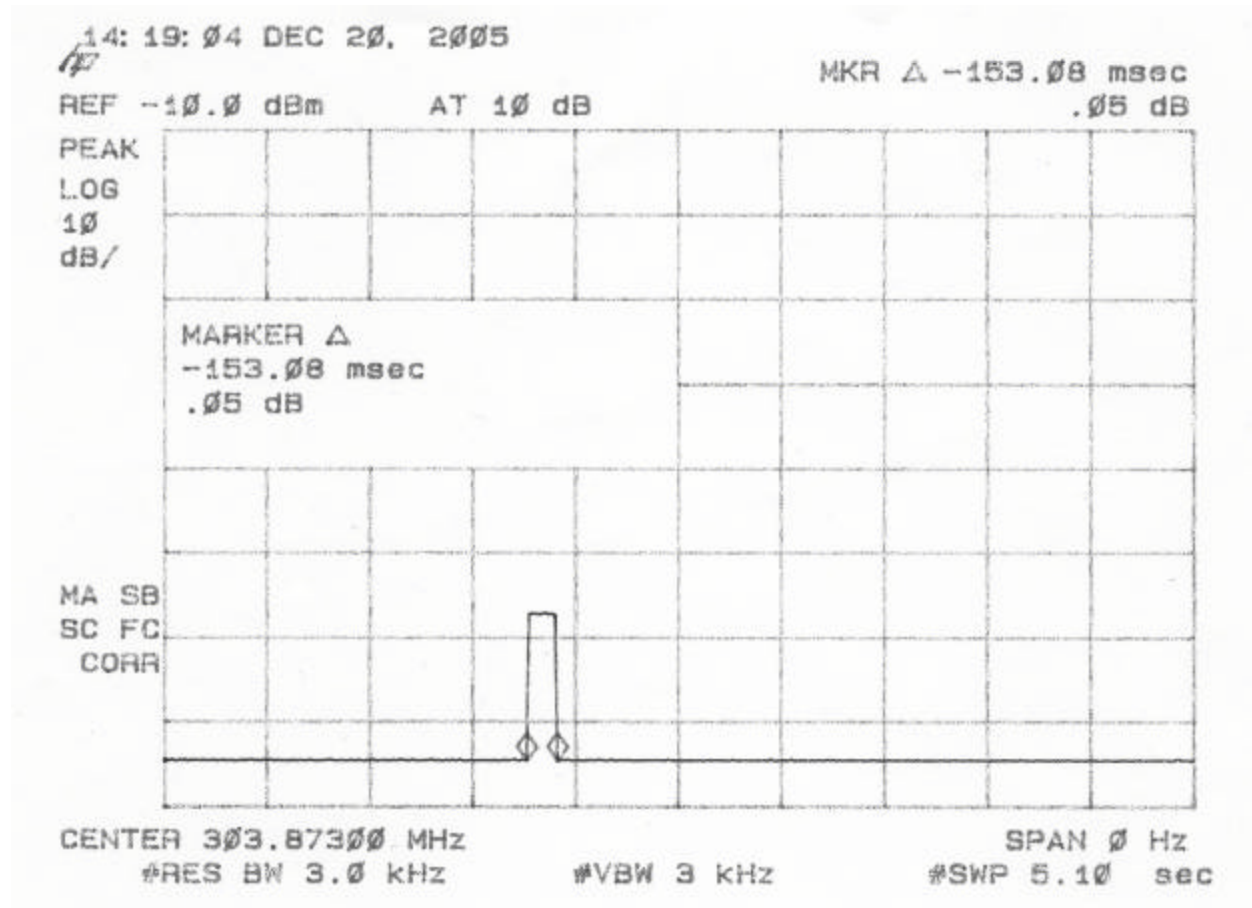

Field Strength of Fundamental Emission (47 CFR 15.231b)

Measurements were made using a peak detector. Field strength of the peak fundamental emission is shown in Table 3a and Figure 4.

Duty Cycle Correction During 100 msec:

For detailed information regarding the duty cycle, please see Figures 5a through 5e.

Bit sequence contains 3 sync pulses (1.0200 msec) and 7 pulse position encoded data bits (0.510 msec). The 7 data bits consists of 4 ID bits, 1 Function Bit, and 2 shock level bits.

Total TX = $(3 * 1.0200) + (7 * 0.510) = 6.630$ msec every 69.75 msec

Duty Cycle = $6.62791/66.750 = 9.50\%$

Duty Cycle Correction = $20 \log (0.09505) = -20.44$ dB

Field strength of the average fundamental emission is shown in Table 3b.

TABLE 3a

FIELD STRENGTH OF FUNDAMENTAL EMISSION

Test Date: December 4, 2005
 UST Project: 05-0300
 Customer: Radio Systems Corporation
 Model: FT-303

Peak Measurement

| FREQ. (MHz) | TEST DATA (dBm) @ 3m | ANTENNA FACTOR + CABLE ATTENUATION | RESULTS (uV/m) @ 3m | PEAK FCC LIMITS (uV/m) @ 3m |
|----------------|----------------------------|--|---------------------------|--------------------------------------|
| 303.906 | -40.5 | 18.0 | 16,904.9 | 55,794.2 |

SAMPLE CALCULATIONS:

RESULTS uV/m @ 3m = Antilog $((-40.5 + 18.0 + 107)/20)$ = 16,904.9

CONVERSION FROM dBm TO dBuV = 107 dB

Tested
By: _____



Name: Austin Thompson

TABLE 3b

FIELD STRENGTH OF FUNDAMENTAL EMISSION

Test Date: December 4, 2005
 UST Project: 05-0300
 Customer: Radio Systems Corporation
 Model: FT-303

Average Measurement

| FREQ. (MHz) | TEST DATA (dBm) @ 3m* | ANTENNA FACTOR + CABLE ATTENUATION | RESULTS (uV/m) @ 3m | AVERAGE FCC LIMITS (uV/m) @ 3m |
|----------------|-----------------------------|--|---------------------------|---|
| 303.900 | -60.90 | 18.0 | 1597.5 | 5,579.4 |

* Duty Cycle Correction = $20 \log (0.0992) = -20.1 \text{ dB}$

SAMPLE CALCULATIONS:

RESULTS uV/m @ 3m = $\text{Antilog} ((-60.90 + 18.0 + 107)/20) = 1597.5$
 CONVERSION FROM dBm TO dBuV = 107 dB

Tested
 By: _____



Name: Austin Thompson

FIGURE 4

FIELD STRENGTH OF FUNDAMENTAL EMISSION 15.231(b)

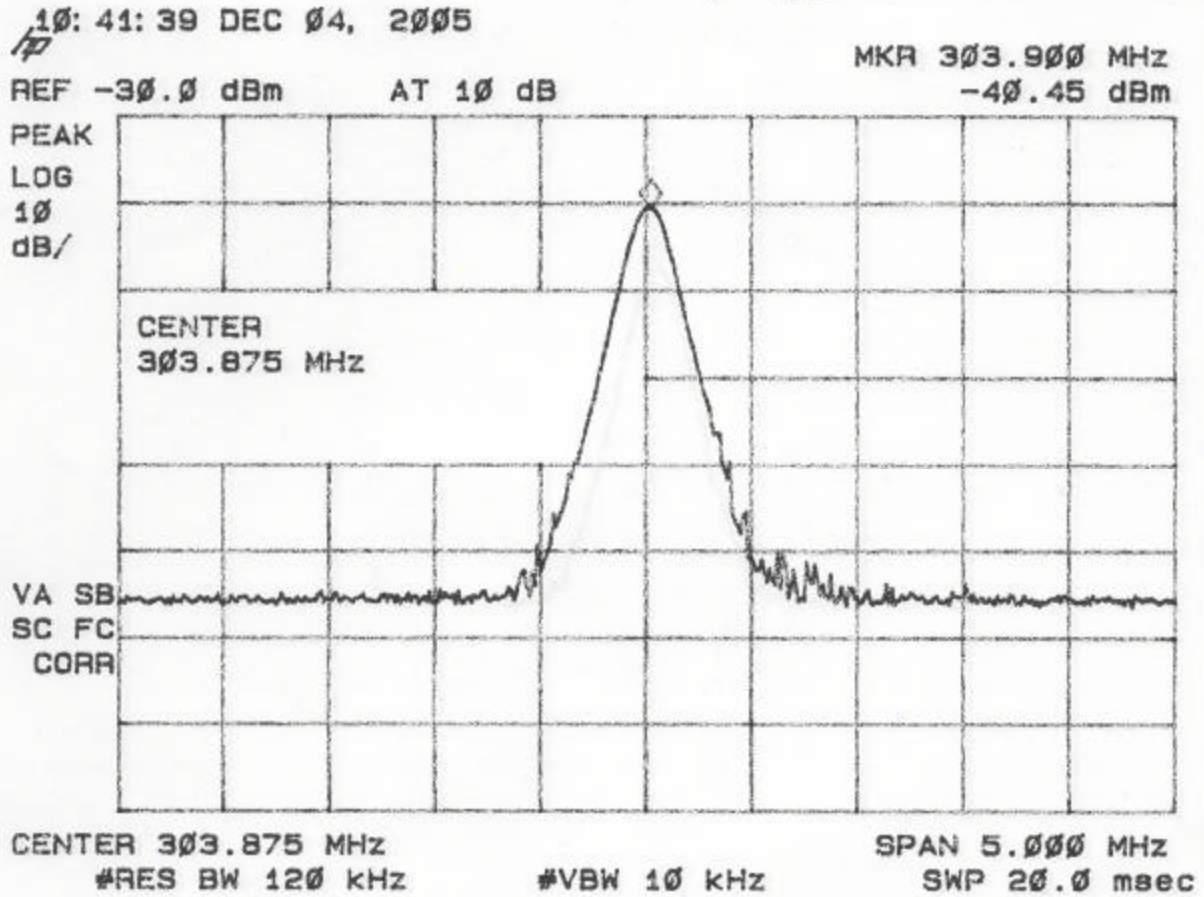


FIGURE 5a

DUTY CYCLE CHARACTERISTICS

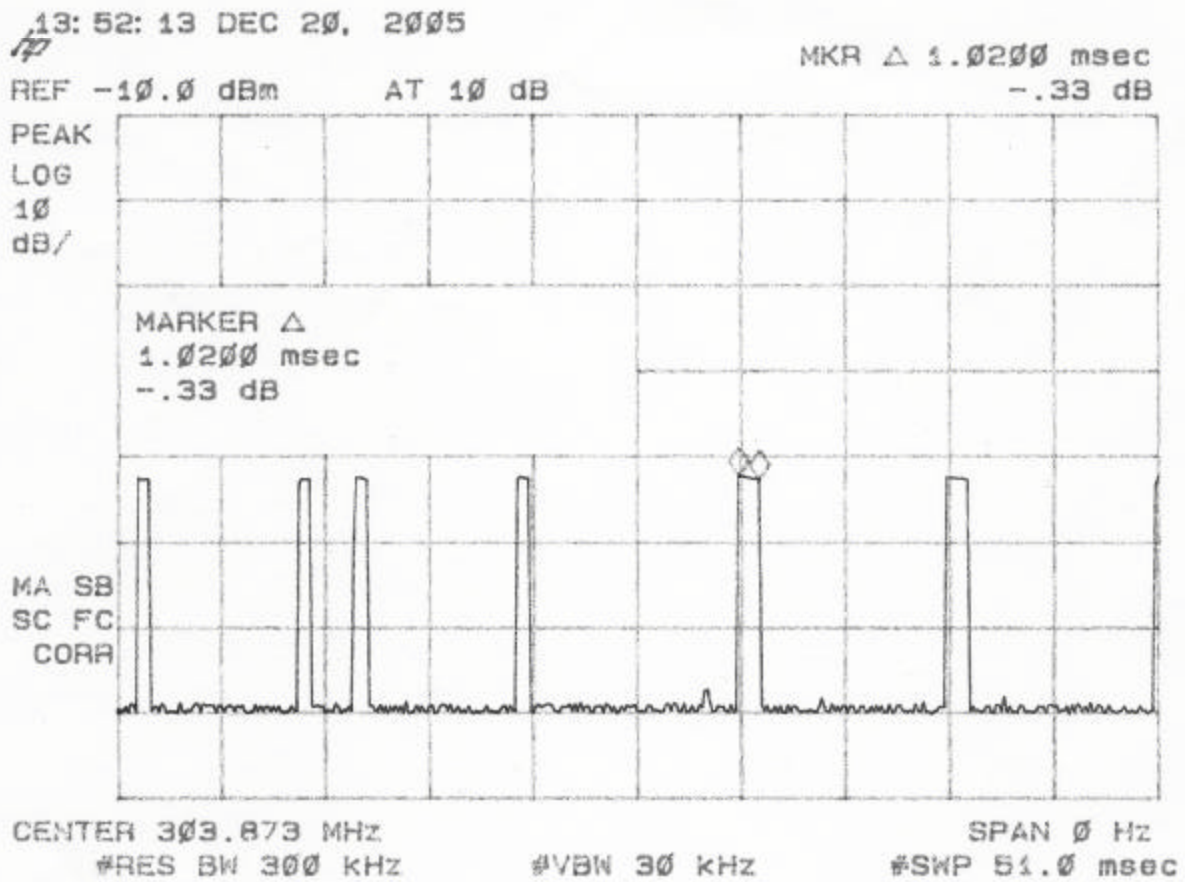


FIGURE 5b

DUTY CYCLE CHARACTERISTICS

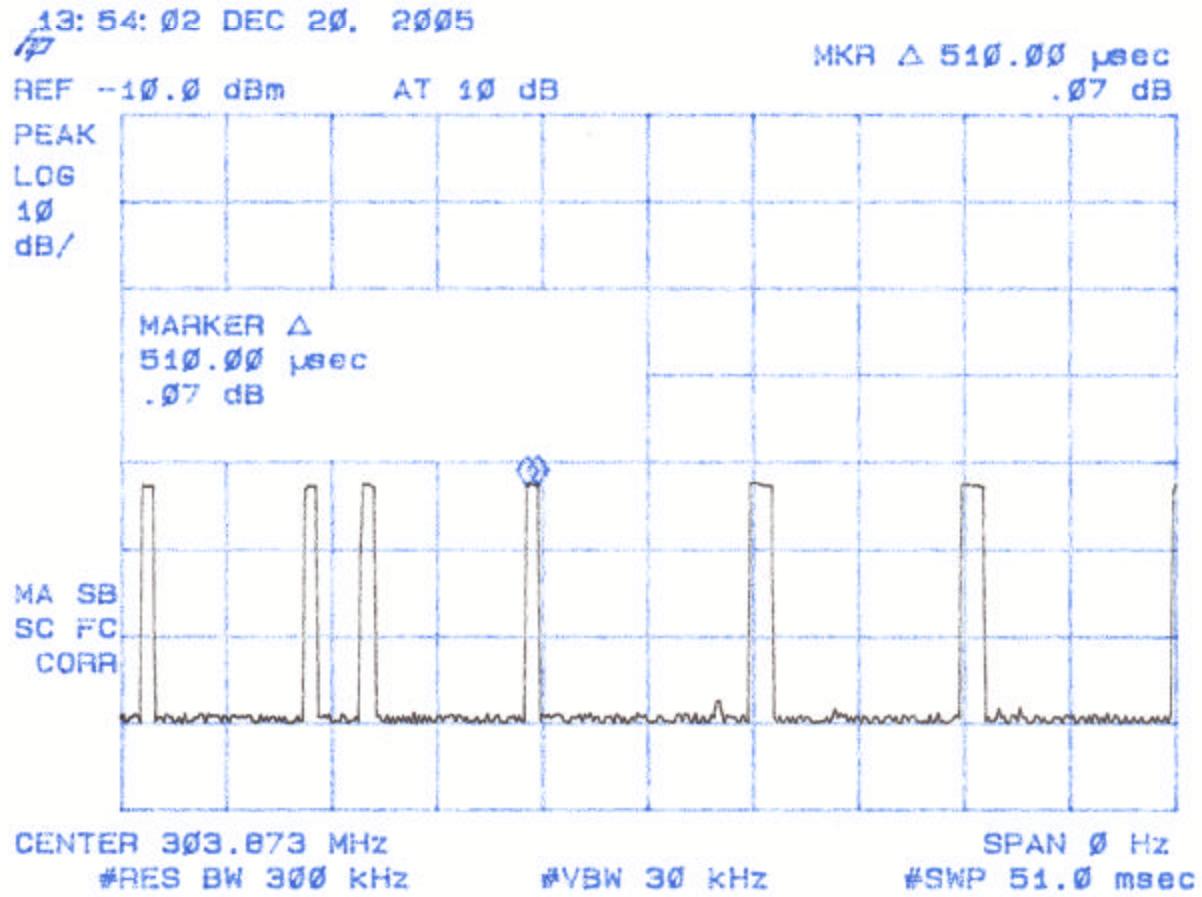


FIGURE 5c

DUTY CYCLE CHARACTERISTICS


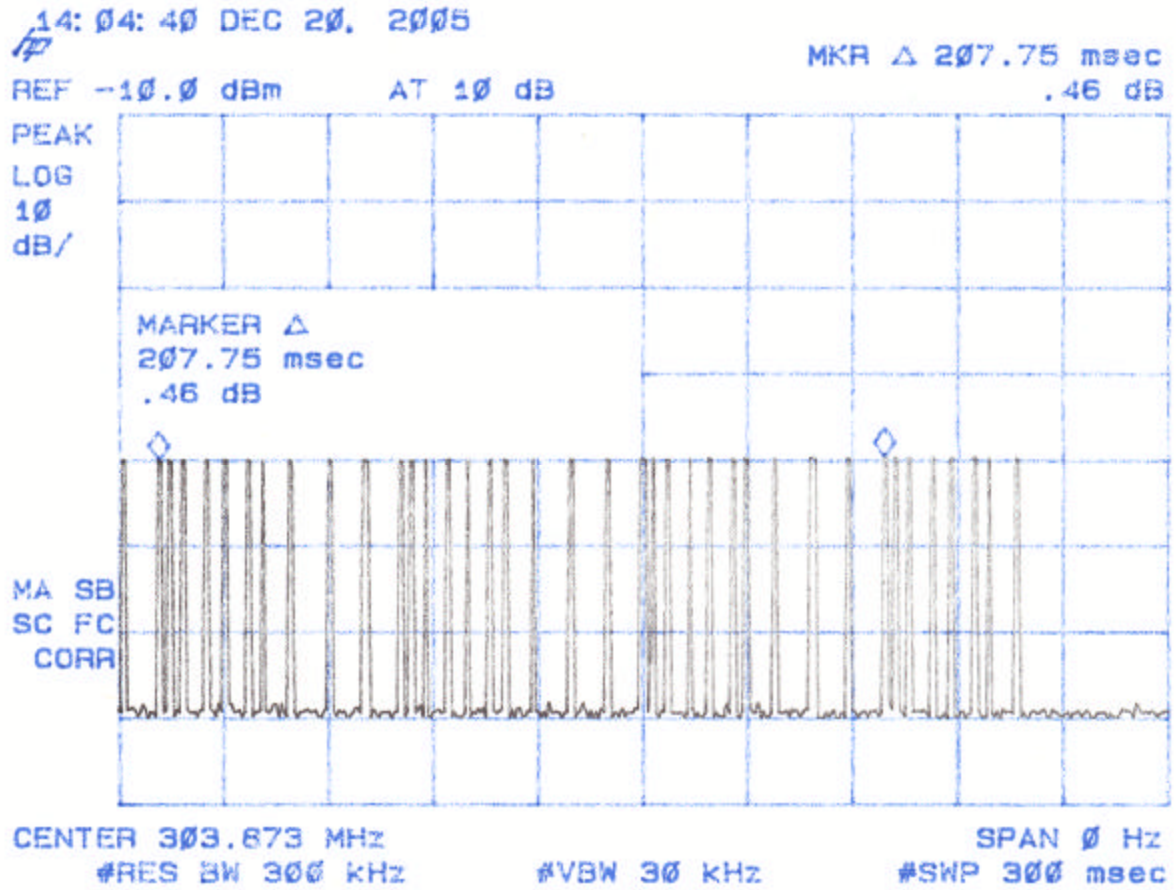


FIGURE 5d

DUTY CYCLE CHARACTERISTICS

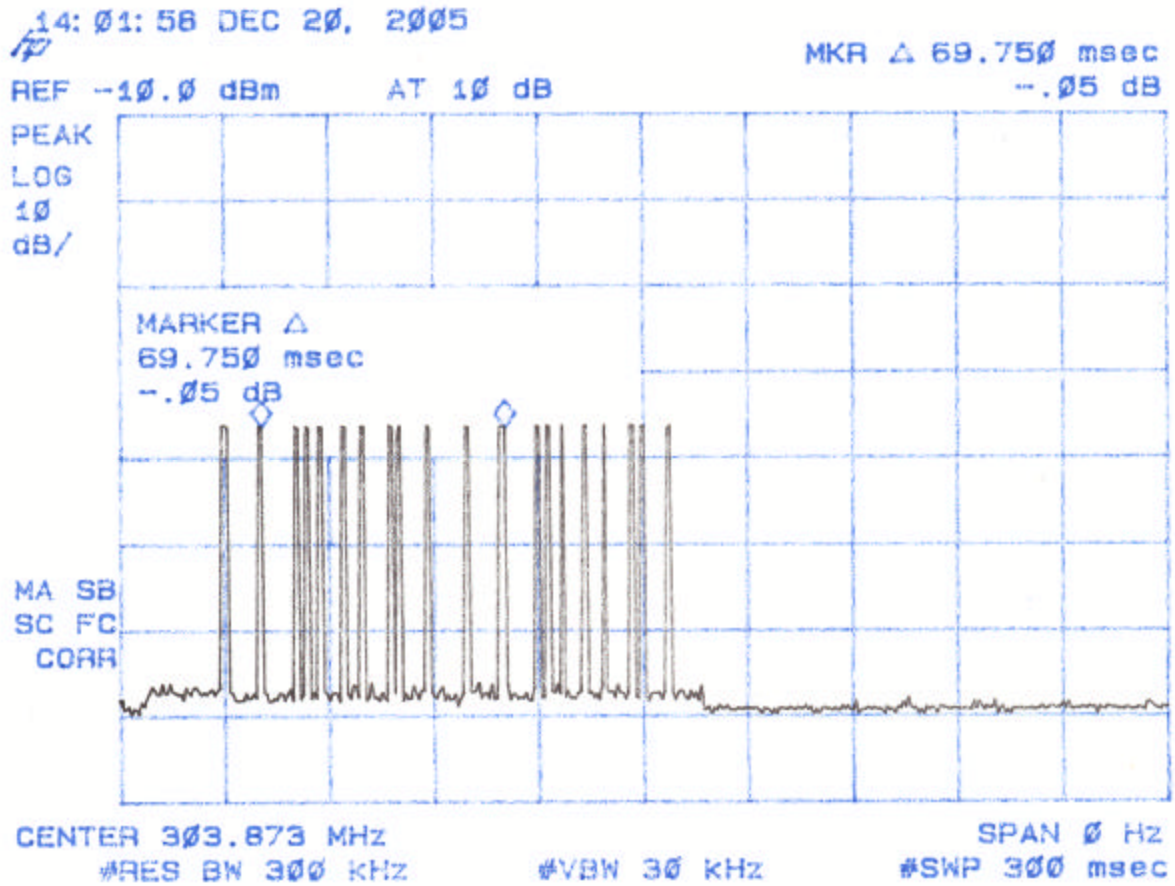

Field Strength Of Spurious Emissions (47 CFR 15.231b)

Measurements were made using a peak detector. Field strength of Spurious Emissions are shown in Table 5 and Figures 6. For comparison to the average limits, duty cycle corrections were made as given in the previous section. Any emission less than 1000 MHz and falling within the restricted bands of 15.205 were not adjusted for averaging and the limits of 15.209 were applied.

TABLE 5a

FIELD STRENGTH OF SPURIOUS EMISSIONS

Test Date: December 20, 2005
 UST Project: 05-0300
 Customer: Radio Systems Corporation
 Model: FT-303

Peak Measurement

| FREQ. (MHz.) | TEST DATA (dBm) @ 3m | ANTENNA FACTOR + CABLE ATTENUATION - AMP GAIN | RESULTS (uV/m) @ 3m | PEAK FCC LIMITS (uV/m) @ 3m |
|-----------------|----------------------------|---|---------------------------|--------------------------------------|
| 607.74 | -70.7 | 23.6 | 980.1 | 5579.4 |
| 911.94 | -72.7 | 29.4 | 1,537.2 | 5579.4 |
| 1,146.8** | -43.5 | -5.4 | 803.3 | 5,000.0 |
| 1,215.7** | -36.2 | -5.4 | 186.3 | 5,000.0 |
| 1,930.0 | -33.5 | -5.3 | 2567.9 | 5579.4 |

** Denotes restricted band of operation

SAMPLE CALCULATIONS:

RESULTS uV/m @ 3m = Antilog $((-70.7 + 23.6 + 107)/20)$ = 980.1

CONVERSION FROM dBm TO dBuV = 107 dB

Tested

By: _____



Name: Austin Thompson

TABLE 5b

FIELD STRENGTH OF SPURIOUS EMISSIONS

Test Date: December 20, 2005
 UST Project: 05-0300
 Customer: Radio Systems Corporation
 Model: FT-303

Average Measurement

| FREQ. (MHz.) | TEST DATA* (dBm) @ 3m | ANTENNA FACTOR + CABLE ATTENUATION - AMP GAIN | RESULTS (uV/m) @ 3m | PEAK FCC LIMITS (uV/m) @ 3m |
|-----------------|-----------------------------|--|---------------------------|--------------------------------------|
| 607.74 | -91.1 | 23.6 | 93.9 | 557.94 |
| 911.94 | -93.1 | 29.4 | 146.3 | 557.94 |
| 1146.86** | -73.5 | -9.1 | 16.6 | 500 |
| 1215.7** | -66.2 | -8.9 | 39.3 | 500 |
| 1930.29 | -64.0 | -4.6 | 83.2 | 557.94 |

* Duty Cycle Correction = $20 \log (0.0992) = -20.44 \text{ dB}$

** Denotes restricted band of operation

SAMPLE CALCULATIONS:

RESULTS uV/m @ 3m = $\text{Antilog} ((-91.9 + 23.6 + 107)/20) = 93.9$

CONVERSION FROM dBm TO dBuV = 107 dB

Tested
By: _____



Name: Austin Thompson

FIGURE 6a

SPURIOUS EMISSIONS 16.231(b)

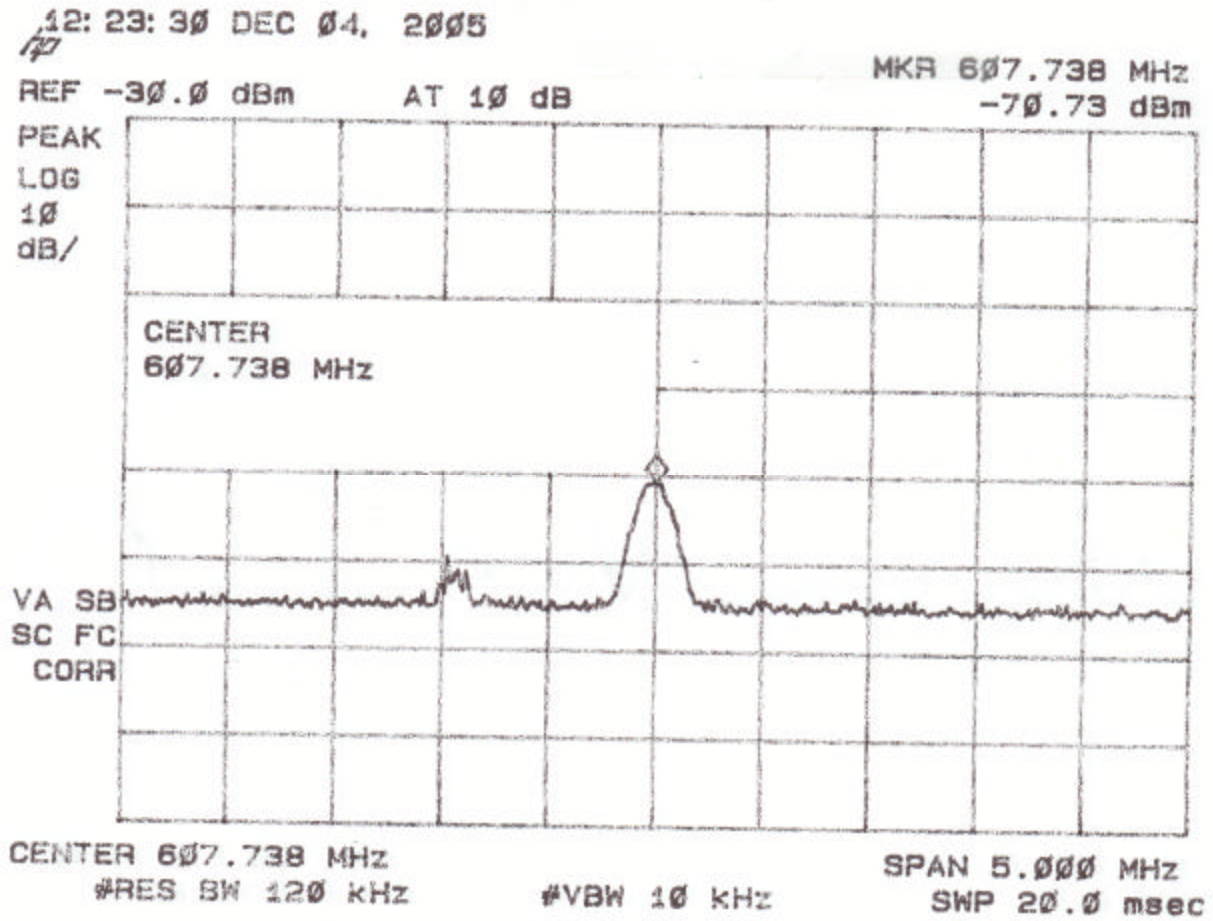


FIGURE 6b

SPURIOUS EMISSIONS 16.231(b)

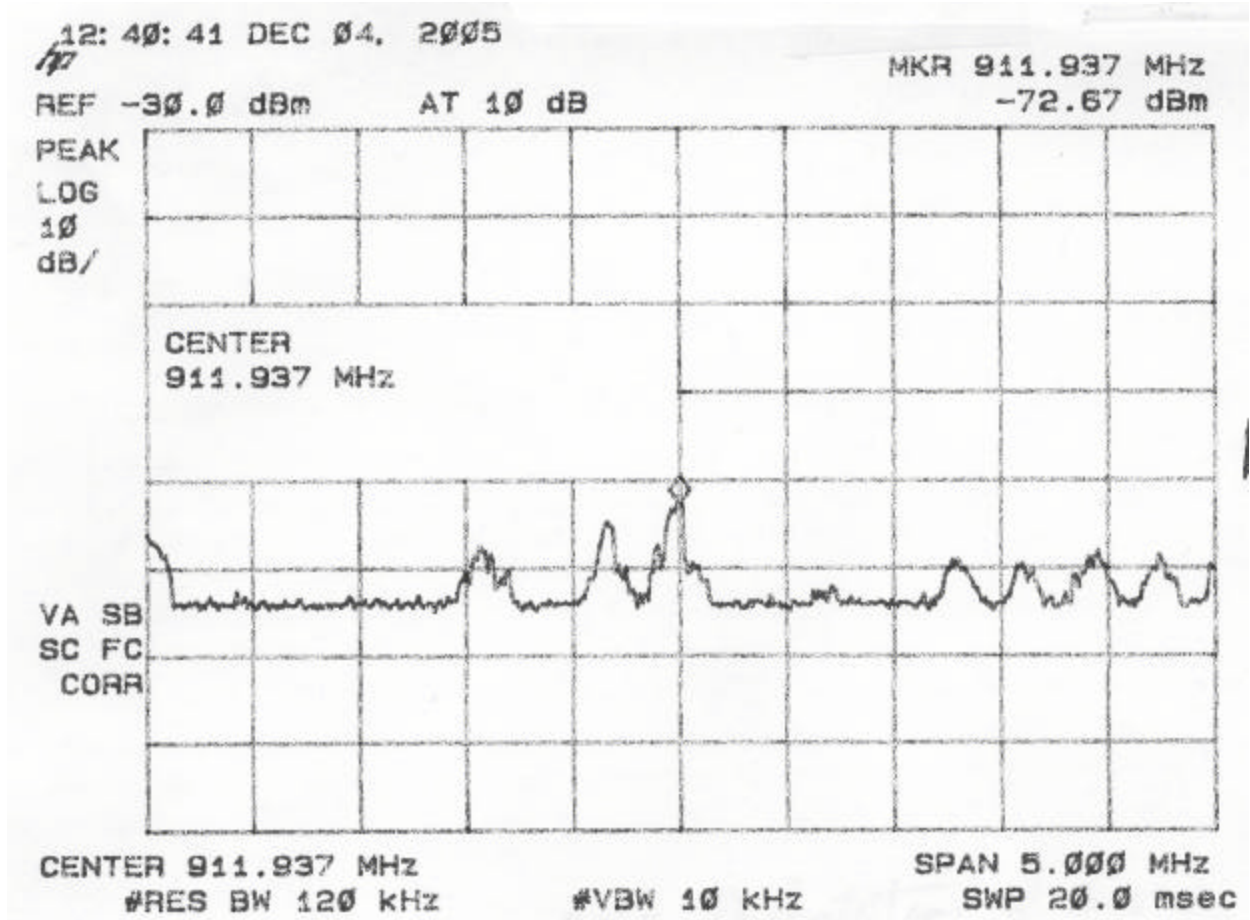


FIGURE 6c-e

SPURIOUS EMISSIONS 16.231(b)

Plot Not Available

20 dB Bandwidth of Fundamental Emission (47 CFR 15.231c)

The peak 20 dB bandwidth measurement of the fundamental emission is shown in Table 6 and Figure 7.

TABLE 6

20 dB BANDWIDTH OF FUNDAMENTAL EMISSION

Test Date: December 20, 2005
UST Project: 05-0300
Customer: Radio Systems Corporation
Model: FT-303

| FREQUENCY (MHz) | 20 dB BANDWIDTH (kHz) | FCC LIMITS (kHz) |
|--------------------|--------------------------|---------------------|
| 303.893 | 380 | 759.6 |

FCC Limit = (0.25%) (Center Frequency) = (0.0025)(303.825 MHz) = 759.6 kHz

Tested By
Signature: _____



Name: Paul Picard

Frequency Tolerance of Carrier Signal (47 CFR 15.231d)

The EUT does not operate in the 40.66 - 40.70 MHz band, therefore frequency tolerance measurements were deemed unnecessary.

Radiated Digital Device Emissions (47 CFR 15.109a)

Radiated emissions were evaluated from 30 to 1000 MHz. Measurements were made with the analyzer's bandwidth set to 120 kHz. Emissions are shown in Table 7.

TABLE 7a

CLASS B
RADIATED EMISSIONS

Test Date: December 2, 2005
UST Project: 05-0300
Customer: Radio Systems Corporation
Model: FT-303

| Radiated Emissions | | | | | | | | | |
|--|-----------------|------------------------|---------------|-----------|---------------|--------------------|---------------------|--------|--------|
| Test By: | Test: | FCC Final Verification | | | | Client: | Radio Systems Corp. | | |
| A.T. | Project: | 05-0300 | Class: | B | Model: | FT-303 Transmitter | | | |
| Frequency Range | | | | | | | | | |
| 30 MHz - 1 GHz | | | | | | | | | |
| Frequency | Test Data | AF | Test Data | AF+CA-AMP | Results | Limits | Distance / | Margin | PK = n |
| (MHz) | (dBm) | Table | (dBUV) | (dB) | (uV/m) | (uV/m) | Polarity | (dB) | / QP |
| No emissions seen within 20 dB of FCC limits | | | | | | | | | |

SAMPLE CALCULATIONS: None

Tested

By:



Name: Austin Thompson

Power Line Conducted Emissions (47 CFR 15.107a)

The EUT is operated by internal battery power or with optional power adapter / battery charger.

TABLE 8a

POWER LINE CONDUCTED EMISSIONS

Test Date: December 4, 2005
UST Project: 05-0300
Customer: Radio Systems Corporation
Model: FT-303

Peak Measurement Average Limits
Phase

| Conducted Emissions | | | | | | | | |
|------------------------|------------------|---------------------------------------|------------------|------------------|----------------|----------------------|---------------|---------------|
| Test By: | Test: | FCC Part 15 Certification PK vs Av | | | Client: | Radio Systems Corp. | | |
| A.T. | Project: | 05-0300 | Class: | B | Model: | FT - 303 | | |
| Frequency Range | | Table | Model | | S/N | Calibrated: | | |
| 0.15 MHz | 30. MHz | ConCable | 75ft. | | S/N | | | |
| | | LISNP | ure (Deg C).: 24 | | S/N | May 20, 2004 3:37 PM | | |
| | | LISNN | ure (Deg C).: 24 | | S/N | May 20, 2004 3:49 PM | | |
| Frequency | Test Data | AF | Test Data | AF+CA-AMP | Results | Limits | Margin | PK = n |
| (MHz) | (dBm) | Table | (dBuV) | (dB) | (dBuV) | (dBuV) | (dB) | / QP |
| 0.57 | -86.0 | LISNP | 21.0 | 0.0 | 21.0 | 46.0 | 25.0 | PK=n |
| 3.6 | -86.6 | LISNP | 20.4 | 0.3 | 20.7 | 46.0 | 25.3 | PK=n |
| 1.495 | -85.0 | LISNP | 22.0 | 0.2 | 22.2 | 46.0 | 23.8 | PK=n |
| 3.528 | -86.6 | LISNP | 20.4 | 0.3 | 20.7 | 46.0 | 25.3 | PK=n |
| 2.643 | -85.1 | LISNP | 21.9 | 0.2 | 22.1 | 46.0 | 23.9 | PK=n |
| 2.293 | -85.4 | LISNP | 21.6 | 0.2 | 21.8 | 46.0 | 24.2 | PK=n |

SAMPLE CALCULATIONS:

RESULTS uV/m @ 3m = Antilog $((-86.0 + 0.0 + 107)/20) = 21.0$

CONVERSION FROM dBm TO dBuV = 107 dB

Tested
 By:



Name: Austin Thompson

TABLE 8b

POWER LINE CONDUCTED EMISSIONS

Test Date: December 4, 2005
UST Project: 05-0300
Customer: Radio Systems Corporation
Model: FT-303

Peak Measurement Average Limits
Neutral

| Conducted Emissions | | | | | | | | |
|---------------------|-----------|---------------------------------------|------------------|-----------|---------|---------|----------------------|--------|
| Test By: | Test: | FCC Part 15 Certification PK vs Av | | | | Client: | Radio Systems Corp. | |
| A.T. | Project: | 05-0300 | Class: | | B | Model: | FT - 303 | |
| Frequency Range | | Table | Model | | S/N | | Calibrated: | |
| 0.15 MHz | 30. MHz | Con Cable | 75ft. | | S/N | | | |
| | | LISNP | ure (Deg C):: 24 | | S/N | | May 20, 2004 3:37 PM | |
| | | LISNN | ure (Deg C):: 24 | | S/N | | May 20, 2004 3:49 PM | |
| Frequency | Test Data | AF | Test Data | AF+CA-AMP | Results | Limits | Margin | PK = n |
| (MHz) | (dBm) | Table | (dBuV) | (dB) | (dBuV) | (dBuV) | (dB) | / QP |
| 0.16 | -83.7 | LISNN | 23.3 | -0.2 | 23.1 | 55.5 | 32.4 | PK=n |
| 0.74 | -93.2 | LISNN | 13.8 | 0.1 | 13.9 | 46.0 | 32.1 | PK=n |
| 3.183 | -94.6 | LISNN | 12.4 | 0.3 | 12.7 | 46.0 | 33.3 | PK=n |
| 3.141 | -93.8 | LISNN | 13.2 | 0.3 | 13.5 | 46.0 | 32.5 | PK=n |
| 1.808 | -94.7 | LISNN | 12.3 | 0.2 | 12.5 | 46.0 | 33.5 | PK=n |
| 2.75 | -93.9 | LISNN | 13.1 | 0.2 | 13.3 | 46.0 | 32.7 | PK=n |

SAMPLE CALCULATIONS:

RESULTS uV/m @ 3m = Antilog $((-83.7 + -0.2 + 107)/20) = 23.1$

CONVERSION FROM dBm TO dBuV = 107 dB

Tested
 By:



Name: Austin Thompson