

Exhibit U: Spurious Radiated Emissions

FCC ID: HN2SB555

Justification

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. While scanning the radiated emissions, all of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

Channels in Specified Band Investigated:

Low

Mid

High

Operating Modes Investigated:

PSC Mode

Cellular Mode

PSC Mode simultaneously transmitting with co-located 802.11(b) radio

Cellular Mode simultaneously transmitting with co-located 802.11(b) radio

Antennas Investigated:

PSTGO-1900SCI

PSTGO-900 / 1900SCI

Data Rates Investigated:

Maximum

Power Input Settings Investigated:

Battery

Frequency Range Investigated

Start Frequency

30 MHz

Stop Frequency

25 GHz

Software\Firmware Applied During Test

Exercise software

Sierra SMART

Version

V.046

Description

The system was tested using special software developed to test all functions of the device during the test.

Equipment Modifications

No EMI suppression devices were added or modified. The EUT was tested as delivered.

EUT and Peripherals

Description	Manufacturer	Model/Part Number	Serial Number
EUT-Radio	Intermec	SB555	6301FEOC
Host Device	Intermec	700C	E02093050443010
Antenna	Mobile Mark	PSTGO-1900SCI	N/A
Antenna	Mobile Mark	PSTGO-900 / 1900SCI	N/A

Cables

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
N/A	N/A	N/A	N/A	N/A	N/A

PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.

Measurement Equipment

Description	Manufacturer	Model	Identifier	Last Cal	Interval
Spectrum Analyzer	Hewlett-Packard	8566B	AAL	03/19/2002	12 mo
Pre-Amplifier	Amplifier Research	LN1000A	APS	12/03/2001	14 mo
Antenna, Biconilog	EMCO	3141	AXE	12/31/2001	36 mo
Antenna, Horn	EMCO	3115	AHJ	05/23/2002	12 mo
Pre-Amplifier	Miteq	AMF-4D-010120-30-10P	AOP	07/09/2002	12 mo
Spectrum Analyzer	Tektronix	2784	AAO	03/08/2001	24 mo
Pre-Amplifier	Miteq	JSD4-18002600-26-8P	APU	01/17/2000	36 mo
Antenna, Horn	EMCO	3160-09	AHG	01/15/2000	36 mo
DC Power Supply	Topward	TPS-2000	TPD	NCR	N/A
Signal Generator	Hewlett-Packard	8341B	TGM	01/09/02	12 mo
Antenna, Horn	EMCO	3115	AHF	03/03/02	12 mo

Test Description

Requirement: Per 2.1053, the field strength of spurious radiation was measured in the far-field at an FCC Listed semi-anechoic chamber up to 25 GHz. The applicable limits are 22.917(e) for the cellular band, and 24.238(a) for the PCS band.

Per 22.917(e), the mean power of out of band emissions must be attenuated below the mean power of the unmodulated carrier (P) on any frequency twice or more than twice the fundamental frequency by at least $43 + 10 \log (P)$ dB. (-13 dBm).

Per 24.238(a), on any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. (-13 dBm).

Configuration: Spectrum analyzer, signal generator, and linearly polarized antennas were used to measure radiated harmonics and spurious emissions. The orientation of the EUT and measurement antenna were manipulated to maximize the level of emissions. The EUT was configured to transmit at the highest output at low, mid, and high channels. The EUT was tested with each antenna. Only one antenna can be used at a time.

The substitution method as described in TIA/EIA-603 Section 2.2.12 was used for the highest spurious emissions. The EUT was tested individually, then while simultaneously transmitting with a co-located radio.

Test Methodology: For licensed transmitters, the FCC references TIA/EIA-603 as the measurement procedure standard. TIA/EIA-603 Section 2.2.12 describes a method for measuring radiated spurious emissions that utilizes an antenna substitution method:

At an approved test site, the transmitter is placed on a remotely controlled turntable, and the measurement antenna is placed 3 meters from the transmitter. The turntable azimuth is varied to maximize the level of

spurious emissions. The height of the measurement antenna is also varied from 1 to 4 meters. The amplitude and frequency of the highest emissions are noted. The transmitter is then replaced with a $\frac{1}{2}$ wave dipole that is successively tuned to each of the highest spurious emissions. A signal generator is connected to the dipole (horn antenna for frequencies above 1 GHz), and its output is adjusted to match the level previously noted for each frequency. The output of the signal generator is recorded, and by factoring in the cable loss to the dipole antenna and its gain; the power (dBm) into an ideal $\frac{1}{2}$ wave dipole antenna is determined for each radiated spurious emission.

For the purposes of preliminary measurements, the field strength of the spurious emissions can be measured and compared with a 3 meter limit. The final measurements must be made utilizing the substitution method described above. The 3 meter limit was calculated to be 84.3 dBuV/m at 3 meters. This was based upon an output power of 0.224 W.

Simultaneous Transmission: The EUT will be co-located with two other radios: FCC ID:HN22011B (802.11(b) radio), and FCC ID:HN2ABTM3-2 (Bluetooth radio). Any two of the three radios can transmit simultaneously. All three radios cannot transmit simultaneously. Each radio transmits through its own antenna.

The following is an excerpt from the FCC / TCB Training Q & A, October 2002, Day 2, Question 7:

Assuming that the radios do not share an antenna, only radiated tests for simultaneous transmission is required. If the radios share an antenna, antenna conducted measurements would also be required. Only one set of worst case simultaneous transmission data is going to be requested to be submitted at this time. The test engineer should indicate the worst case condition and provide justification as to why the worst case condition was chosen. The grantee should be reminded that even if the FCC requests one set of data, they are responsible for compliance for all modes of simultaneous transmission.

Since the Bluetooth radio has such a low EIRP (.001W) and is a frequency hopper, the worst case simultaneous transmission mode was determined to be the EUT transmitting simultaneously with the 802.11(b) radio (EIRP = 0.056 W & single channel operation). The EUT was tested in both cellular and PCS modes while simultaneously transmitting with the 802.11(b) radio. Simultaneous low, mid, and high transmit frequencies were investigated from 30 MHz to 25 GHz.


In addition, all the possible combinations of harmonic emissions from the EUT and the 802.11(b) radio were compared numerically. It was determined that only channels 526 (1876 MHz) and 930 (1896 MHz) in PCS mode could have harmonic emissions that coincide with the center frequency of harmonic emissions from the 802.11(b) radio (tuned to channels 1 (2412 MHz) and 6 (2437 MHz) respectively). The frequency range from 10 to 18 GHz was investigated for these channel combinations.

Bandwidths Used for Measurements


Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 – 0.15	1.0	0.2	0.2
0.15 – 30.0	10.0	9.0	9.0
30.0 – 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0
<i>Measurements were made using the bandwidths and detectors specified. No video filter was used.</i>			

Test Setup Diagram


Test Setup for Field Strength Measurements

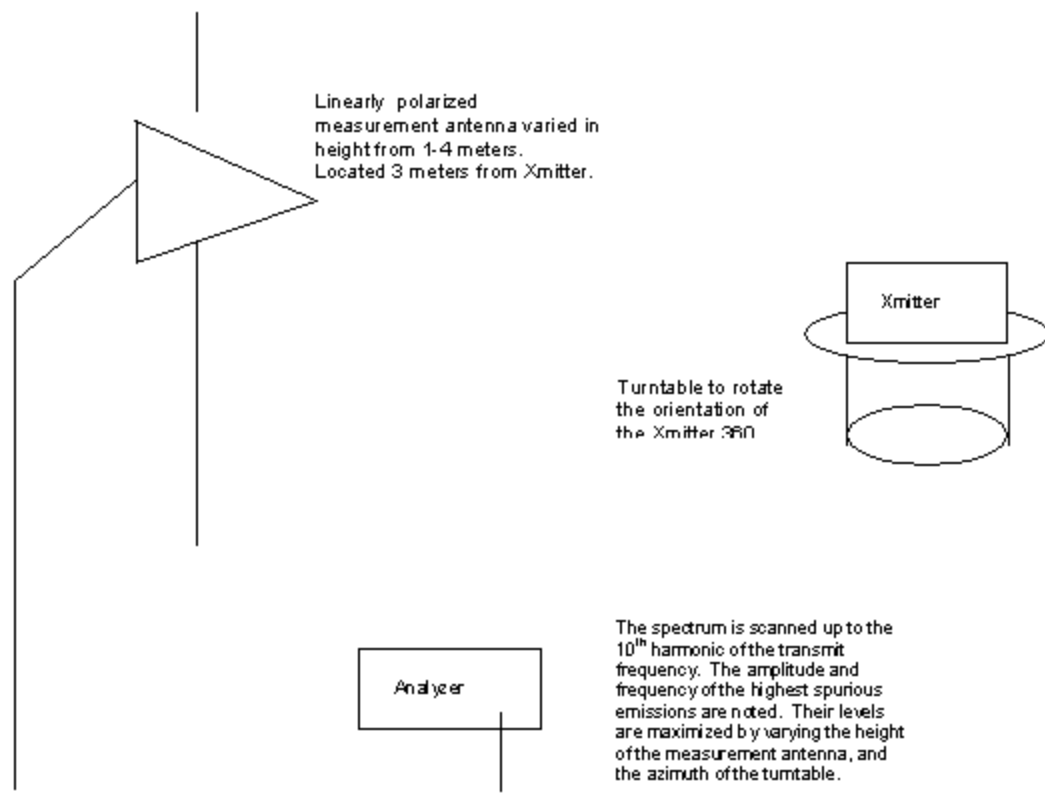

Test Setup for Power Measurements Utilizing the Antenna Substitution Method

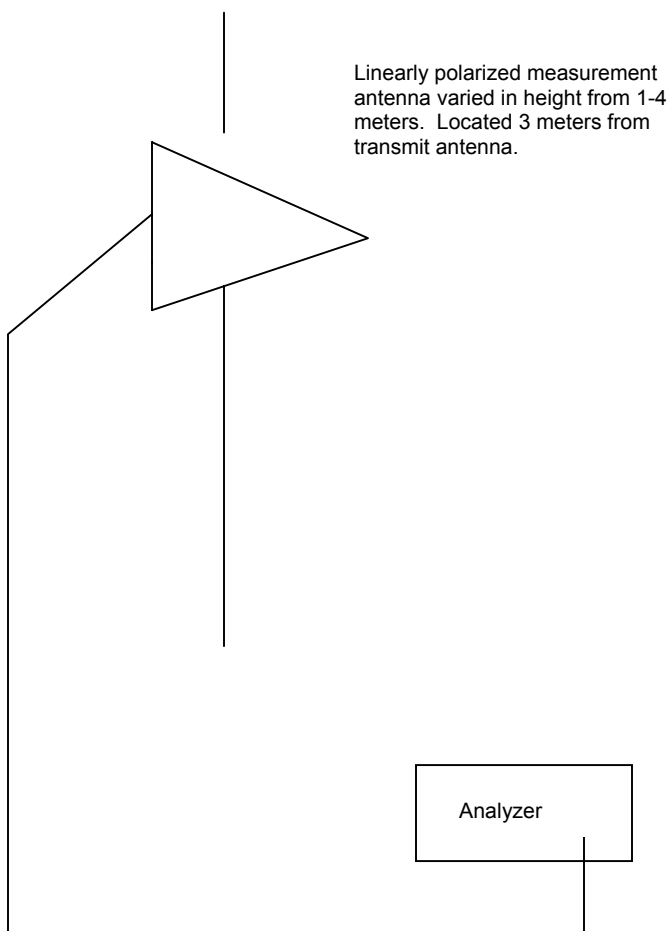

During field strength measurements, the amplitude and frequency of the highest emissions are noted. The transmitter is then replaced with a $\frac{1}{2}$ wave dipole (at the same height) that is successively tuned to each of the highest spurious emissions. A signal generator is connected to the dipole (horn antenna for frequencies above 1 GHz), and its output is adjusted to match the level previously noted for each frequency.

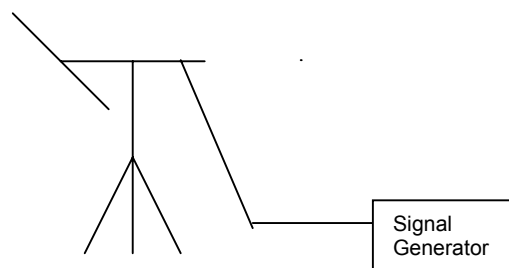

The spectrum analyzer is monitored to verify that the output of the signal generator produces a signal equal in amplitude to a previously measured spurious emission.

Completed by:

Rocky Le Pelley

NORTHWEST

EMC

Apparent Power Data Sheet

REV
df3.02
10/23/2002

EUT: SB555 Radio used in Model 700C		Work Order: INMC0044	
Serial Number: 6301FEOC		Date: 12/24/02	
Customer: INTERMEC Corporation		Temperature: 70	
Attendees: None		Humidity: 32%	
Cust. Ref. No.:		Barometric Pressure 29.75	
Tested by: Rod Peloquin		Power: Battery	Job Site: EV01

TEST SPECIFICATIONS

Specification: FCC Part 24E	Year: 2002
Method: TIA/EIA-603	Year: 1998

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

COMMENTS

Antenna PSTGO-900 / 1900SCI

EUT OPERATING MODES

Transmitting - PCS Band

DEVIATIONS FROM TEST STANDARD

No deviations.

RESULTS

	Test Distance (m)	Run #
Pass	3	6

Other

Tested By:

0.0

-10.0

-20.0

-30.0

-40.0

-50.0

-60.0

-70.0

-80.0

1000.000

2000.000

3000.000

4000.000

5000.000

6000.000

7000.000

8000.000

9000.000

10000.000

dBm

MHz

Freq
(MHz)

Azimuth
(degrees)

Height
(meters)

Polarity

Detector

EIRP
(dBm)

Spec. Limit
(dBm)

Compared to
Spec.
(dB)

Comments

3699.354

307.0

1.1

H-Horn

PK

-15.7

-13.0

-2.7

Low Channel

3699.360

7.0

1.5

V-Horn

PK

-16.1

-13.0

-3.1

Low Channel

3819.400

156.0

1.2

V-Horn

PK

-17.6

-13.0

-4.6

High Channel

3819.400

69.0

1.3

H-Horn

PK

-17.6

-13.0

-4.6

High Channel

3759.400

347.0

1.2

V-Horn

PK

-18.0

-13.0

-5.0

Mid Channel

3759.400

107.0

1.3

H-Horn

PK

-18.2

-13.0

-5.2

Mid Channel

Apparent Power Data Sheet

EUT:	SB555 Radio used in Model 700C			Work Order:	INMC0044
Serial Number:	6301FEOC			Date:	12/24/02
Customer:	INTERMEC Corporation			Temperature:	72
Attendees:	None			Humidity:	32%
Cust. Ref. No.:				Barometric Pressure	29.75
Tested by:	Rod Peloquin	Power:	Battery	Job Site:	EV01

TEST SPECIFICATIONS

Specification:	FCC Part 24E	Year:	2002
Method:	TIA/EIA-603	Year:	1998

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

COMMENTS

Antenna PSTGO-1900SCI

EUT OPERATING MODES

Transmitting - PCS Band

DEVIATIONS FROM TEST STANDARD

No deviations.


RESULTS

RESULTS	Test Distance (m)	Run #
Pass	3	8

Other

Rocky in Feeling

Tested By:

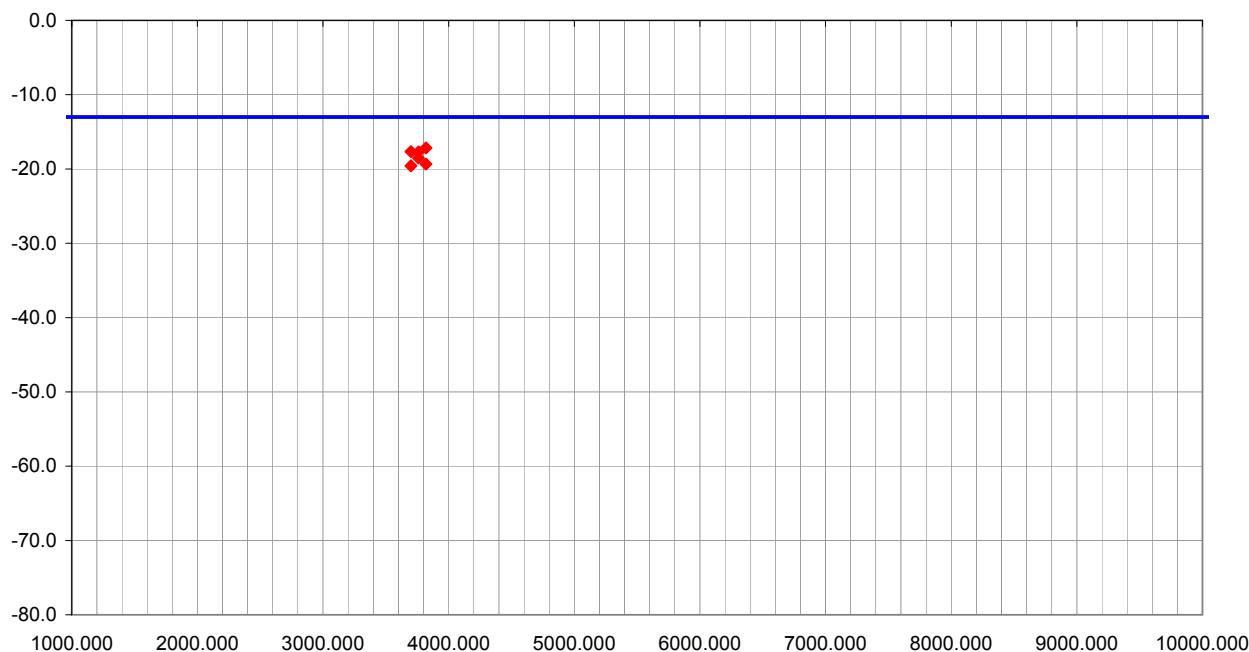

Freq (MHz)			Azimuth (degrees)	Height (meters)			Polarity	Detector		EIRP (dBm)	Spec. Limit (dBm)	Compared to Spec. (dB)	
												Comments	
3819.400			118.0	1.2			V-Horn	PK		-17.2	-13.0	-4.2	High Channel
3699.400			102.0	1.2			V-Horn	PK		-17.6	-13.0	-4.6	Low Channel
3759.400			141.0	1.2			V-Horn	PK		-17.7	-13.0	-4.7	Mid Channel
3759.400			324.0	1.3			H-Horn	PK		-18.5	-13.0	-5.5	Mid Channel
3819.400			99.0	1.3			H-Horn	PK		-19.3	-13.0	-6.3	High Channel
3699.400			301.0	1.3			H-Horn	PK		-19.6	-13.0	-6.6	Low Channel

EUT: SB555 Radio used in Model 700C				Work Order: INMC0044
Serial Number: 6301FEOC				Date: 12/24/02
Customer: INTERMEC Corporation				Temperature: 66
Attendees: None				Humidity: 33%
Cust. Ref. No.:				Barometric Pressure 30.2
Tested by: Rod Peloquin			Power: Battery	Job Site: EV01

TEST SPECIFICATIONS

Specification:	FCC Part 22.901(d)	Year:	2002
Method:	TIA/EIA-603	Year:	1998

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

COMMENTS

Antenna PSTGO-900 / 1900SCI

EUT OPERATING MODES

Transmitting - Cellular Band

DEVIATIONS FROM TEST STANDARD

No deviations.


RESULTS

RESULTS	Test Distance (m)	Run #
Pass	3	10

Other

Rocky in Feeling

Tested By:

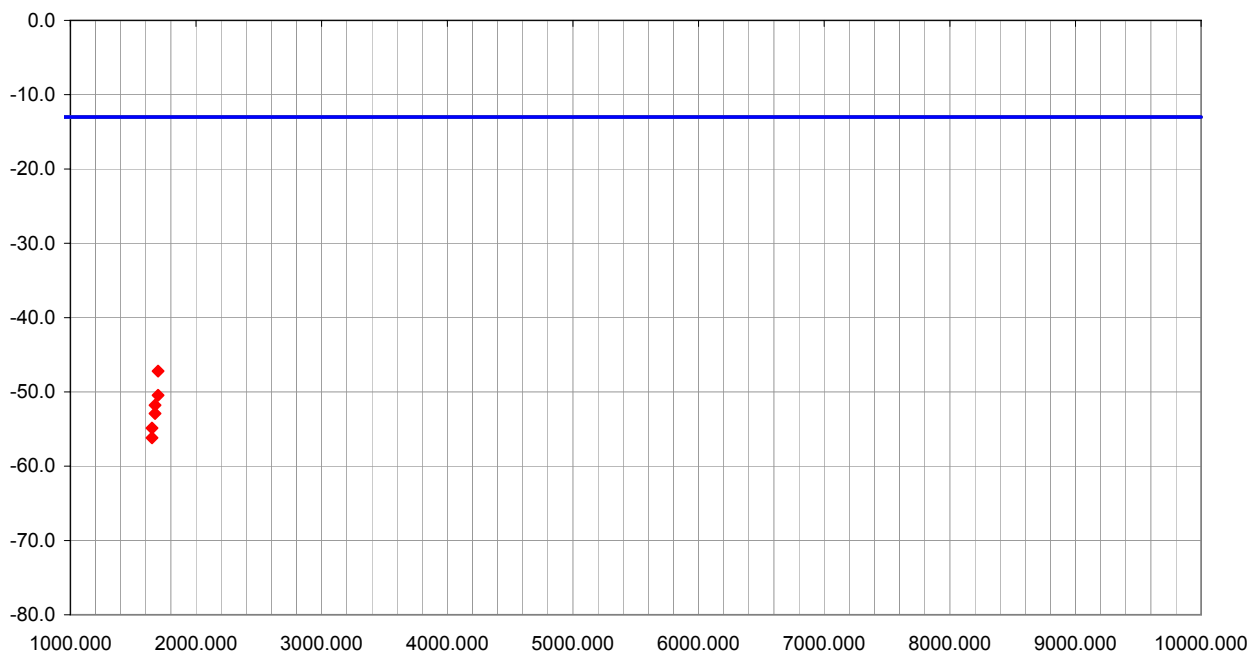

Freq (MHz)			Azimuth (degrees)	Height (meters)			Polarity	Detector		EIRP (dBm)	Spec. Limit (dBm)	Compared to Spec. (dB)	
													Comments
1697.400			184.0	1.5			H-Horn	PK		-47.2	-13.0	-34.2	High Channel
1697.400			275.0	1.2			V-Horn	PK		-50.5	-13.0	-37.5	High Channel
1673.400			161.0	1.2			H-Horn	PK		-51.8	-13.0	-38.8	Mid Channel
1673.400			69.0	1.2			V-Horn	PK		-52.9	-13.0	-39.9	Mid Channel
1649.400			176.0	1.2			H-Horn	PK		-54.9	-13.0	-41.9	Low Channel
1649.400			74.0	1.2			V-Horn	PK		-56.2	-13.0	-43.2	Low Channel

NORTHWEST

EMC

REV
d13.02
10/23/2002

EUT:SB555 Radio used in Model 700C

Work Order:INMC0044

Serial Number:6301FEOC

Date:12/24/02

Customer:INTERMEC Corporation

Temperature:72

Attendees:None

Humidity:32%

Cust. Ref. No.:

Barometric Pressure29.75

Tested by:Rod Peloquin

Power:Battery

Job Site:EV01

TEST SPECIFICATIONS

Specification:FCC Part 15 Class B

Year:2000

Method:ANSI C63.4

Year:1992

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

COMMENTS

Antenna PSTGO-900 / 1900SCI

EUT OPERATING MODES

Receive Mode - Cellular Band

DEVIATIONS FROM TEST STANDARD

No deviations.

RESULTS

Test Distance (m)

Run #

Pass

3

12

Other

Tested By:

dBuV/m

80.0

70.0

60.0

50.0

40.0

30.0

20.0

10.0

0.0

1000.000

1500.000

2000.000

2500.000

3000.000

3500.000

4000.000

4500.000

5000.000

MHz

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments
2107.230	31.8	-0.3	172.0	1.6	3.0	0.0	V-Horn	AV	0.0	31.5	54.0	-22.5	Low Channel
2131.200	30.5	-0.3	77.0	1.3	3.0	0.0	H-Horn	AV	0.0	30.2	54.0	-23.8	Mid Channel
2131.200	30.5	-0.3	155.0	1.6	3.0	0.0	V-Horn	AV	0.0	30.2	54.0	-23.8	Mid Channel
2107.230	30.0	-0.3	147.0	1.3	3.0	0.0	H-Horn	AV	0.0	29.7	54.0	-24.3	Low Channel
2155.150	30.0	-0.3	255.0	1.3	3.0	0.0	H-Horn	AV	0.0	29.7	54.0	-24.3	High Channel
2155.150	29.6	-0.3	157.0	1.2	3.0	0.0	V-Horn	AV	0.0	29.3	54.0	-24.7	High Channel
2155.150	40.5	-0.3	255.0	1.3	3.0	0.0	H-Horn	PK	0.0	40.2	74.0	-33.8	High Channel
2155.150	40.4	-0.3	157.0	1.2	3.0	0.0	V-Horn	PK	0.0	40.1	74.0	-33.9	High Channel
2107.230	40.2	-0.3	172.0	1.6	3.0	0.0	V-Horn	PK	0.0	39.9	74.0	-34.1	Low Channel
2131.200	40.0	-0.3	155.0	1.6	3.0	0.0	V-Horn	PK	0.0	39.7	74.0	-34.3	Mid Channel
2131.200	39.9	-0.3	77.0	1.3	3.0	0.0	H-Horn	PK	0.0	39.6	74.0	-34.4	Mid Channel
2107.230	39.6	-0.3	147.0	1.3	3.0	0.0	H-Horn	PK	0.0	39.3	74.0	-34.7	Low Channel

Apparent Power Data Sheet

EUT: SB555 Radio used in Model 700C

Work Order: INMC0044

Serial Number: 6301FEOC

Date: 12/31/02

Customer: INTERMEC Corporation

Temperature: 73

Attendees: None

Humidity: 34%

Cust. Ref. No.:

Barometric Pressure: 29.75

Tested by: Rod Peloquin

Power: Battery

Job Site: EV01

TEST SPECIFICATIONS

Specification: FCC Part 24E

Year: 2002

Method: TIA/EIA-603

Year: 1998

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

COMMENTS

Antenna PSTGO-900 / 1900SCI

EUT OPERATING MODES

Transmitting in PCS mode and 802.11(b) mode

DEVIATIONS FROM TEST STANDARD

No deviations.

RESULTS

Pass

Test Distance (m)

3


Run #

14

Other

Rod Peloquin

Tested By:

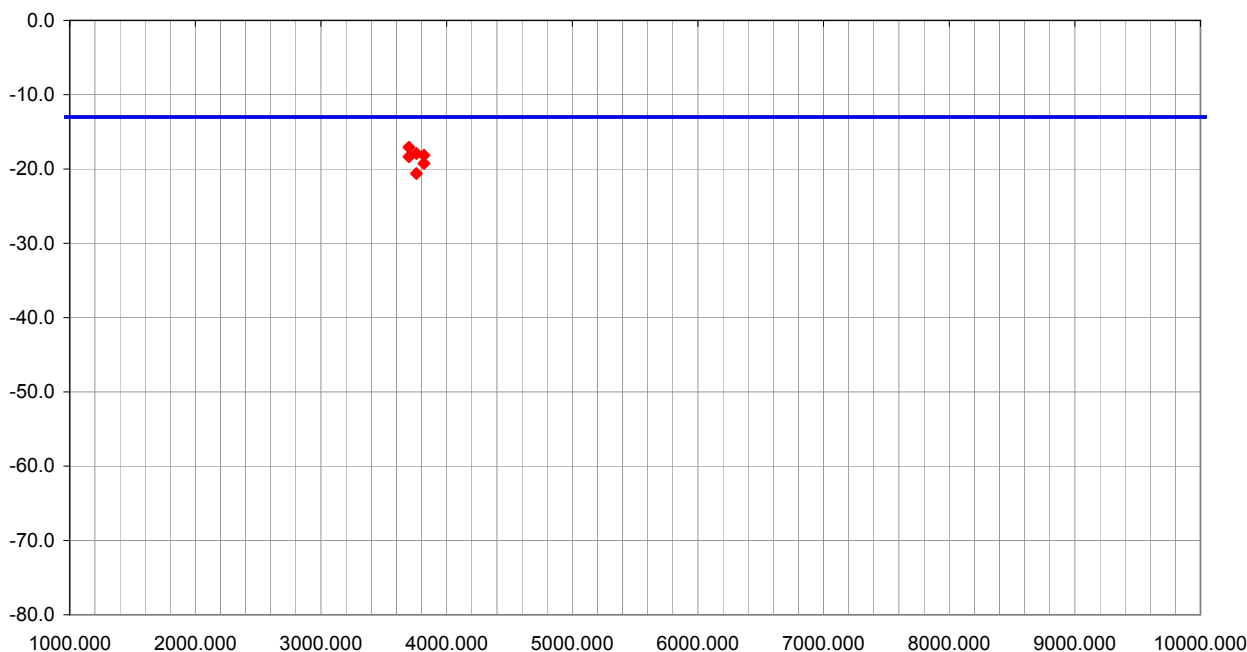

Freq (MHz)			Azimuth (degrees)	Height (meters)			Polarity	Detector		EIRP (dBm)	Spec. Limit (dBm)	Compared to Spec. (dB)	Comments
3699.356			71.0	2.0			H-Horn	PK		-17.1	-13.0	-4.1	Low Channel
3759.348			49.0	1.9			H-Horn	PK		-17.9	-13.0	-4.9	Mid Channel
3819.360			20.0	1.9			H-Horn	PK		-19.2	-13.0	-6.2	High Channel
3819.360			344.0	1.0			V-Horn	PK		-18.2	-13.0	-5.2	High Channel
3699.356			153.0	1.0			V-Horn	PK		-18.3	-13.0	-5.3	Low Channel
3759.400			355.0	1.3			V-Horn	PK		-20.6	-13.0	-7.6	Mid Channel

Apparent Power Data Sheet

EUT: SB555 Radio used in Model 700C

Work Order: INMC0044

Serial Number: 6301FEOC

Date: 12/31/02

Customer: INTERMEC Corporation

Temperature: 73

Attendees: None

Humidity: 34%

Cust. Ref. No.:

Barometric Pressure: 29.75

Tested by: Rod Peloquin

Power: Battery

Job Site: EV01

TEST SPECIFICATIONS

Specification: FCC Part 22.901(d)

Year: 2002

Method: TIA/EIA-603

Year: 1998

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

COMMENTS

Antenna PSTGO-900 / 1900SCI

EUT OPERATING MODES

Transmitting in Cellular mode and 802.11(b) mode

DEVIATIONS FROM TEST STANDARD

No deviations.

RESULTS

Test Distance (m)

Run #

Pass


3

16


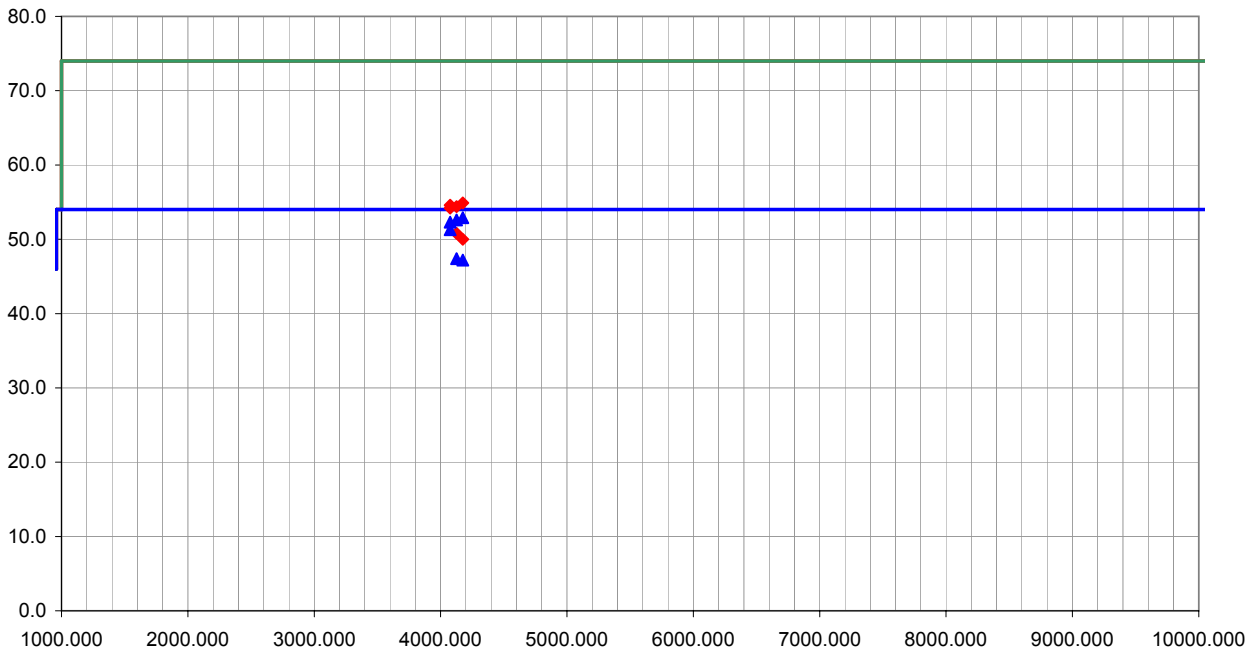
Other



Tested By:

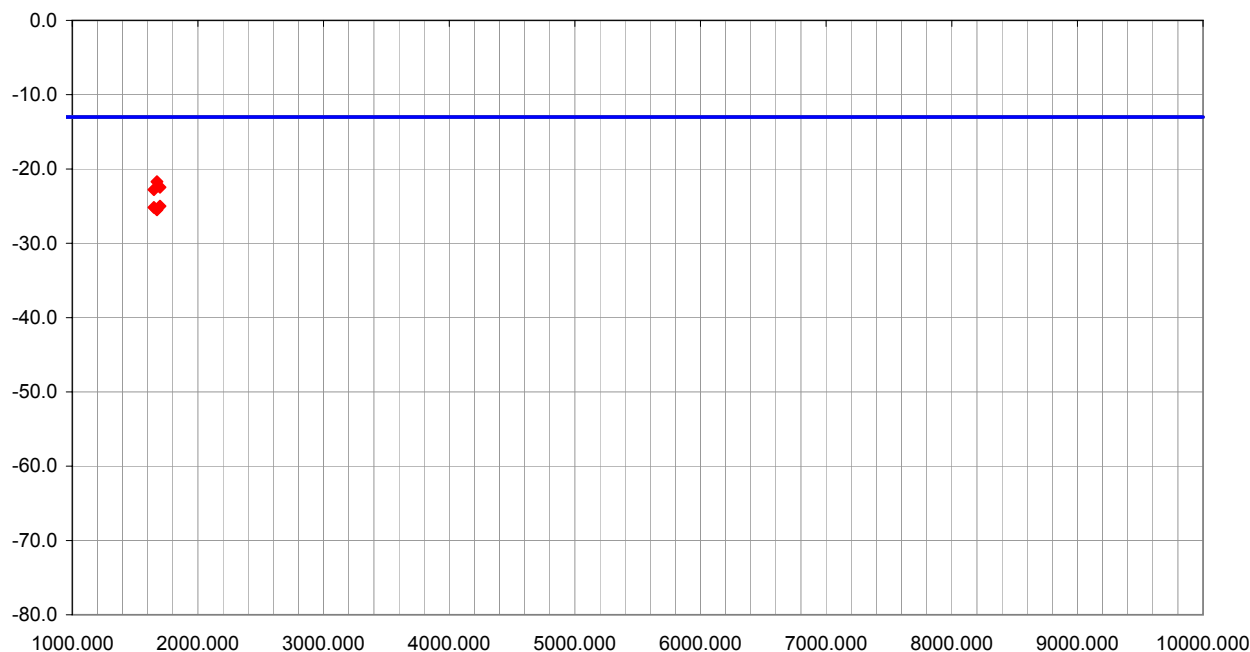

Freq (MHz)			Azimuth (degrees)	Height (meters)			Polarity	Detector		EIRP (dBm)	Spec. Limit (dBm)	Compared to Spec. (dB)	Comments
1673.360			319.0	1.2			V-Horn	PK		-21.7	-13.0	-8.7	Mid Channel
1697.360			113.0	1.3			H-Horn	PK		-25.0	-13.0	-12.0	High Channel
1697.360			19.0	1.2			V-Horn	PK		-22.5	-13.0	-9.5	High Channel
1649.360			78.0	1.3			H-Horn	PK		-25.2	-13.0	-12.2	Low Channel
1649.360			116.0	1.2			V-Horn	PK		-22.8	-13.0	-9.8	Low Channel
1673.360			176.0	1.3			H-Horn	PK		-25.5	-13.0	-12.5	Mid Channel

NORTHWEST EMC										OATS DATA SHEET				REV df3.02 10/23/2002	
EUT: SB555 Radio used in Model 700C										Work Order: INMC0044					
Serial Number: 6301FEOC										Date: 01/02/03					
Customer: INTERMEC Corporation										Temperature: 72					
Attendees: None										Humidity: 35%					
Cust. Ref. No.:										Barometric Pressure: 29.92					
Tested by: Rod Peloquin					Power: Battery		Job Site: EV01								
TEST SPECIFICATIONS															
Specification: FCC Part 15.247(c)										Year: 2001					
Method: ANSI C63.4										Year: 1992					
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
Antenna PSTGO-900 / 1900SCI															
EUT OPERATING MODES															
Transmitting in Cellular mode and 802.11(b) mode															
DEVIATIONS FROM TEST STANDARD															
No deviations.															
RESULTS										Test Distance (m)		Run #			
Pass										3		18			
Other										 Tested By:					
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments		
4176.000	47.0	5.9	16.0	1.3	3.0	0.0	H-Horn	AV	0.0	52.9	54.0	-1.1	High Channel		
4126.000	46.6	6.0	360.0	1.7	3.0	0.0	H-Horn	AV	0.0	52.6	54.0	-1.4	Mid Channel		
4076.000	46.3	6.0	86.0	1.3	3.0	0.0	V-Horn	AV	0.0	52.3	54.0	-1.7	Low Channel		
4076.000	45.3	6.0	66.0	1.8	3.0	0.0	H-Horn	AV	0.0	51.3	54.0	-2.7	Low Channel		
4126.000	41.4	6.0	348.0	1.3	3.0	0.0	V-Horn	AV	0.0	47.4	54.0	-6.6	Mid Channel		
4176.000	41.3	5.9	342.0	1.1	3.0	0.0	V-Horn	AV	0.0	47.2	54.0	-6.8	High Channel		
4176.000	49.0	5.9	16.0	1.3	3.0	0.0	H-Horn	PK	0.0	54.9	74.0	-19.1	High Channel		
4076.000	48.6	6.0	86.0	1.3	3.0	0.0	V-Horn	PK	0.0	54.6	74.0	-19.4	Low Channel		
4126.000	48.4	6.0	360.0	1.7	3.0	0.0	H-Horn	PK	0.0	54.4	74.0	-19.6	Mid Channel		
4076.000	48.2	6.0	66.0	1.8	3.0	0.0	H-Horn	PK	0.0	54.2	74.0	-19.8	Low Channel		
4126.000	44.8	6.0	348.0	1.3	3.0	0.0	V-Horn	PK	0.0	50.8	74.0	-23.2	Mid Channel		
4176.000	44.1	5.9	329.0	1.2	3.0	0.0	V-Horn	PK	0.0	50.0	74.0	-24.0	High Channel		

NORTHWEST

EMC

OATS DATA SHEET

REV
df3.02
10/23/2002

EUT: SB555 Radio used in Model 700C						Work Order: INMC0044	
Serial Number: 6301FEOC						Date: 01/02/03	
Customer: INTERMEC Corporation						Temperature: 73	
Attendees: None						Humidity: 34%	
Cust. Ref. No.:						Barometric Pressure 29.75	
Tested by: Rod Peloquin				Power: Battery		Job Site: EV01	

TEST SPECIFICATIONS

Specification: FCC Part 15.247(c)		Year: 2001
Method: ANSI C63.4		Year: 1992

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

COMMENTS

Antenna PSTGO-900 / 1900SCI

EUT OPERATING MODES

Transmitting in PCS mode and 802.11(b) mode

DEVIATIONS FROM TEST STANDARD

No deviations.

RESULTS	Test Distance (m)	Run #
Pass	3	20

Other

Rocky Le Peloquin

Tested By:

dBuV/m

80.0

70.0

60.0

50.0

40.0

30.0

20.0

10.0

0.0

1000.000

2000.000

3000.000

4000.000

5000.000

6000.000

7000.000


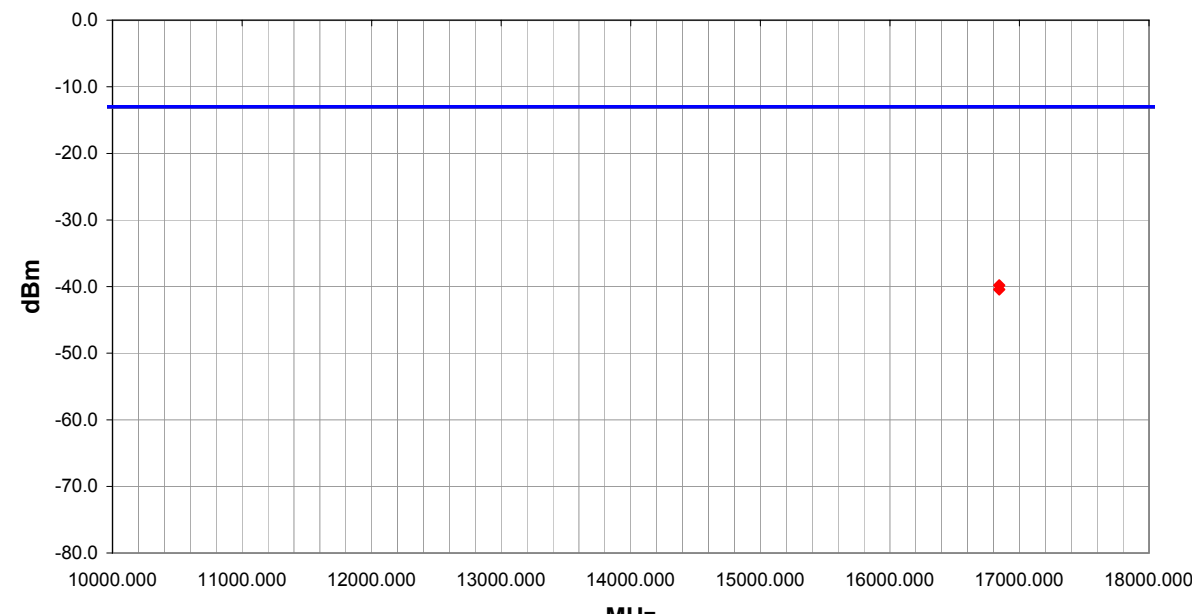
8000.000


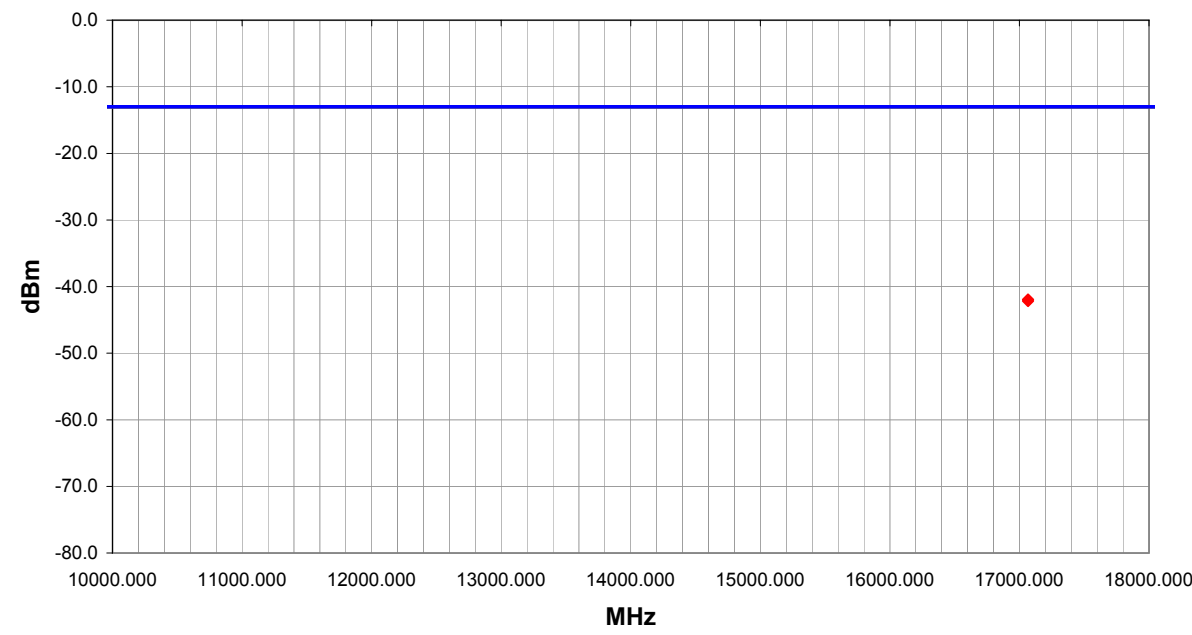
9000.000

10000.000

MHz

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments
4126.000	47.0	6.0	31.0	1.5	3.0	0.0	H-Horn	AV	0.0	53.0	54.0	-1.0	Mid Channel
4076.000	43.7	6.0	226.0	1.1	3.0	0.0	V-Horn	AV	0.0	49.7	54.0	-4.3	Low Channel
4176.000	41.9	5.9	57.0	1.2	3.0	0.0	V-Horn	AV	0.0	47.8	54.0	-6.2	High Channel
4176.000	41.4	5.9	143.0	1.3	3.0	0.0	H-Horn	AV	0.0	47.3	54.0	-6.7	High Channel
4126.000	39.5	6.0	135.0	1.2	3.0	0.0	V-Horn	AV	0.0	45.5	54.0	-8.5	Mid Channel
4076.000	38.1	6.0	221.0	1.3	3.0	0.0	H-Horn	AV	0.0	44.1	54.0	-9.9	Low Channel
4126.000	50.2	6.0	31.0	1.5	3.0	0.0	H-Horn	PK	0.0	56.2	74.0	-17.8	Mid Channel
4076.000	46.3	6.0	226.0	1.1	3.0	0.0	V-Horn	PK	0.0	52.3	74.0	-21.7	Low Channel
4176.000	45.1	5.9	143.0	1.3	3.0	0.0	H-Horn	PK	0.0	51.0	74.0	-23.0	High Channel
4126.000	44.9	6.0	135.0	1.2	3.0	0.0	V-Horn	PK	0.0	50.9	74.0	-23.1	Mid Channel
4076.000	43.6	6.0	221.0	1.3	3.0	0.0	H-Horn	PK	0.0	49.6	74.0	-24.4	Low Channel
4176.000	42.5	5.9	145.0	1.2	3.0	0.0	V-Horn	PK	0.0	48.4	74.0	-25.6	High Channel

NORTHWEST		Apparent Power Data Sheet				REV d/3.02 10/23/2002				
EMC										
EUT: SB555 Radio used in Model 700C		Work Order: INMC0044								
Serial Number: 6301FEOC		Date: 12/31/02								
Customer: INTERMEC Corporation		Temperature: 75								
Attendees: None		Humidity: 33%								
Cust. Ref. No.:		Barometric Pressure: 29.75								
Tested by: Rod Peloquin		Power: Battery		Job Site: EV01						
TEST SPECIFICATIONS										
Specification: FCC Part 24E		Year: 2002								
Method: TIA/EIA-603		Year: 1998								
SAMPLE CALCULATIONS										
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation										
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator										
COMMENTS										
Antenna PSTGO-900 / 1900SCI										
EUT OPERATING MODES										
Transmitting in Channel 526 (1876MHz) PCS mode and Channel 1 (2412MHz) 802.11(b) mode										
DEVIATIONS FROM TEST STANDARD										
No deviations.										
RESULTS		Test Distance (m)		Run #						
Pass		1		22						
Other										
		 Tested By:								
										
Freq (MHz)		Azimuth (degrees)	Height (meters)		Polarity	Detector		EIRP (dBm)	Spec. Limit (dBm)	Compared to Spec. (dB)
16844.000		135.0	1.2		H-Horn	PK		-40.4	-13.0	-27.4
16844.000		140.0	1.2		V-Horn	PK		-39.8	-13.0	-26.8

NORTHWEST EMC										Apparent Power Data Sheet										REV d13.02 10/23/2002	
EUT: SB555 Radio used in Model 700C										Work Order: INMC0044											
Serial Number: 6301FEOC										Date: 12/31/02											
Customer: INTERMEC Corporation										Temperature: 73											
Attendees: None										Humidity: 34%											
Cust. Ref. No.:										Barometric Pressure: 29.75											
Tested by: Rod Peloquin					Power: Battery					Job Site: EV01											
TEST SPECIFICATIONS																					
Specification: FCC Part 24E										Year: 2002											
Method: TIA/EIA-603										Year: 1998											
SAMPLE CALCULATIONS																					
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation																					
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator																					
COMMENTS																					
Antenna PSTGO-900 / 1900SCI																					
EUT OPERATING MODES																					
Transmitting in Channel 930 (1896MHz) PCS mode and Channel 6 (2437MHz) 802.11(b) mode																					
DEVIATIONS FROM TEST STANDARD																					
No deviations.																					
RESULTS										Test Distance (m)					Run #						
Pass										1					24						
Other																					
										Tested By:											
																					
Freq (MHz)				Azimuth (degrees)		Height (meters)				Polarity		Detector				EIRP (dBm)		Spec. Limit (dBm)		Compared to Spec. (dB)	
17066.000				180.0		1.0				H-Horn		PK				-42.2		-13.0		-29.2	
17066.000				180.0		1.0				V-Horn		PK				-41.9		-13.0		-28.9	