

Report on the RF Testing of:

KYOCERA Corporation
Mobile Phone, Model: EB1055
FCC ID: JOYEB1055

In accordance with FCC Part 27 Subpart C
and FCC Part 27 Subpart L

Prepared for: KYOCERA Corporation
Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku
Yokohama-shi, Kanagawa, Japan
Phone: +81-45-943-6253 Fax: +81-45-943-6314



COMMERCIAL-IN-CONFIDENCE

Document Number: JPD-TR-20195-0

SIGNATURE

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Hiroaki Suzuki	Deputy Manager of RF Group	Approved Signatory	

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Japan Ltd. document control rules.

EXECUTIVE SUMMARY

A sample(s) of this product was tested and found to be compliant with FCC Part 27 Subpart C and FCC Part 27 Subpart L.



DISCLAIMER AND COPYRIGHT

The results in this report are applicable only to the equipment tested.
This report shall not be re-produced except in full without the written approval of TÜV SÜD Japan Ltd.

ACCREDITATION

This test report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

TÜV SÜD Japan Ltd.
Yonezawa Testing Center
5-4149-7 Hachimanpara,
Yonezawa-shi, Yamagata,
992-1128 Japan

Phone: +81 (0) 238 28 2881
Fax: +81 (0) 238 28 2888
www.tuv-sud.jp

Contents

1	Summary of Test	3
1.1	Modification history of the test report	3
1.2	Standards	3
1.3	Test methods.....	3
1.4	Deviation from standards	3
1.5	List of applied test(s) of the EUT	3
1.6	Test information.....	3
1.7	Test set up.....	3
1.8	Test period	3
2	Equipment Under Test.....	4
2.1	EUT information	4
2.2	Modification to the EUT	5
2.3	Variation of family model(s).....	5
2.4	Description of test mode	5
3	Configuration of Equipment.....	6
3.1	Equipment used	6
3.2	System configuration	6
4	Test Result	7
4.1	Effective Radiated Power	7
4.2	Peak to Average Ratio	12
4.3	Occupied Bandwidth	21
4.4	Band Edge Spurious and Harmonic at Antenna Terminals	30
4.5	Radiated Emissions and Harmonic Emissions	75
4.6	Frequency Stability.....	84
5	Measurement Uncertainty	86
6	Laboratory Information.....	87
	Appendix A. Test Equipment.....	88

1 Summary of Test

1.1 Modification history of the test report

Document Number	Modification History	Issue Date
JPD-TR-20195-0	First Issue	Refer to the cover page

1.2 Standards

CFR47 FCC Part 27 Subpart C
CFR47 FCC Part 27 Subpart L

1.3 Test methods

KDB 971168 D01 Power Meas License Digital Systems v03r01
ANSI/TIA/EIA-603-D-2010

1.4 Deviation from standards

None

1.5 List of applied test(s) of the EUT

Test item section	Test item	Condition	Result	Remark
2.1046	Conducted Output Power	Conducted	PASS	*1
27.50	Effective Radiated Power	Radiated	PASS	-
27.50	Peak to Average Ratio	Conducted	PASS	-
2.1049	Occupied Bandwidth	Conducted	PASS	-
27.53 2.1051	Band Edge Spurious and Harmonic at Antenna Terminal	Conducted	PASS	-
27.53 2.1053	Radiated emissions and Harmonic Emissions	Radiated	PASS	-
27.54 2.1055	Frequency Stability	Conducted	PASS	-

*1: Refer to RF Exposure Report (Test Report_SAR)

1.6 Test information

None

1.7 Test set up

Table-top

1.8 Test period

30-July-2020 - 10-September-2020

2 Equipment Under Test

2.1 EUT information

Applicant	KYOCERA Corporation Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku Yokohama-shi, Kanagawa, Japan Phone: +81-45-943-6253 Fax: +81-45-943-6314
Equipment Under Test (EUT)	Mobile Phone
Model number	EB1055
Serial number	N/A
Trade name	Kyocera
Number of sample(s)	1
EUT condition	Pre-Production
Power rating	Battery: DC 3.85 V
Size	(W) 76.0 × (D) 8.7 × (H) 162.0 mm
Environment	Indoor and Outdoor use
Terminal limitation	-20°C to 60°C
Hardware version	DMT1
Software version	0.020SI.0020.a
Firmware version	Not applicable
RF Specification	
Frequency of Operation	Up Link WCDMA Band IV: 1712.4-1752.6 MHz LTE Band IV: 1710.0-1755.0 MHz Down Link WCDMA Band IV: 2112.4-2152.6 MHz LTE Band IV: 2110.0-2155.0 MHz
Modulation type	WCDMA Band IV: QPSK, 16QAM LTE Band IV: QPSK, 16QAM, 64QAM
Emission designator	WCDMA Band IV: 4M17F9W LTE Band IV: BW 1.4M QPSK: 1M11G7D, 16QAM: 1M09W7D, 64QAM: 1M10W7D BW 3M QPSK: 2M69G7D, 16QAM: 2M69W7D, 64QAM: 2M70W7D BW 5M QPSK: 4M50G7D, 16QAM: 4M49W7D, 64QAM: 4M51W7D BW 10M QPSK: 9M00G7D, 16QAM: 8M99W7D, 64QAM: 8M98W7D BW 15M QPSK: 13M5G7D, 16QAM: 13M5W7D, 64QAM: 13M5W7D BW 20M QPSK: 18M0G7D, 16QAM: 18M0W7D, 64QAM: 17M9W7D
Effective Radiated Power (E.R.P.)	WCDMA Band IV: 0.148 W (21.7 dBm) LTE Band IV: 0.170 W (22.3 dBm)
Antenna type	Internal antenna

Antenna gain WCDMA Band IV: -2.1 dBi
 LTE Band IV: -2.1 dBi

2.2 Modification to the EUT

The table below details modifications made to the EUT during the test project.

Modification State	Description of Modification	Modification fitted by	Date of Modification
Model: EB1055, Serial Number: N/A			
0	As supplied by the applicant	Not Applicable	Not Applicable

2.3 Variation of family model(s)

2.3.1 List of family model(s)

Not applicable

2.3.2 Reason for selection of EUT

Not applicable

2.4 Description of test mode

The EUT had been tested under operating condition.
 There are three channels have been tested as following:

Band	Modulation	Bandwidth [MHz]	Channel	Frequency [MHz]
WCDMA Band IV	QPSK	-	1312, 1413, 1513	1712.4, 1732.6, 1752.6
	16QAM	-	1312, 1413, 1513	1712.4, 1732.6, 1752.6
LTE Band IV	QPSK, 16QAM, 64QAM	1.4	19957, 20175, 20393	1710.7, 1732.5, 1754.3
		3	19965, 20175, 20385	1711.5, 1732.5, 1753.5
		5	19975, 20175, 20375	1712.5, 1732.5, 1752.5
		10	20000, 20175, 20350	1715.0, 1732.5, 1750.0
		15	20025, 20175, 20325	1717.5, 1732.5, 1747.5
		20	20050, 20175, 20300	1720.0, 1732.5, 1745.0

The field strength of spurious emissions was measured at each position of all three axis X, Y and Z to compare the level, and the maximum noise.

The worst emission was found in X-axis (All Bands) and the worst case recorded.

Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports.

3 Configuration of Equipment

Numbers assigned to equipment on the diagram in “3.2 System configuration” correspond to the list in “3.1 Equipment used”.

Cabling and setup(s) were taken into consideration and test data was taken under worse case condition.

3.1 Equipment used

No.	Equipment	Company	Model No.	Serial No.	FCC ID/DoC	Comment
1	Mobile Phone	KYOCERA	EB1055	N/A	JOYEB1055	EUT

3.2 System configuration

1. Mobile Phone
(EUT)

4 Test Result

4.1 Effective Radiated Power

4.1.1 Measurement procedure

[FCC 27.50]

<Step 1>

The EUT and support equipment are placed on a 1 meter x 1 meter surface, 0.8 meter height styrene foam table. Radiated emission measurements are performed at 3 meter distance with the broadband antenna (Log periodic antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission. The bandwidth of the spectrum analyzer is set to 1 MHz. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission.

<Step 2>


The substitution antenna is replaced by the transmitter antenna (EUT).
The frequency of the signal generator is adjusted to the measurement frequency.
Level of the signal generator is adjusted to the level that is obtained from step 1, and record the emission level of signal generator.

The spectrum analyzer is set to;

- Span = 1.5 times the OBW
- RBW = 1-5% of the expected OBW, not to exceed 1 MHz
- VBW $\geq 3 \times$ RBW
- Number of sweep points $\geq 2 \times$ span / RBW
- Sweep time = auto-couple
- Detector = RMS (power averaging)
- If the EUT can be configured to transmit continuously (i.e., burst duty cycle $\geq 98\%$), then set the trigger to free run.
- If the EUT cannot be configured to transmit continuously (i.e., burst duty cycle $< 98\%$), then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep. Ensure that the sweep time is less than or equal to the transmission burst duration.
- Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with the band limits set equal to the OBW band edges.

If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

- Test configuration

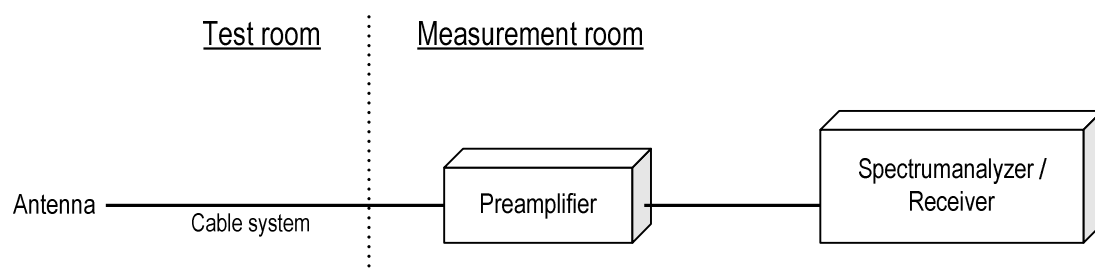

4.1.2 Calculation method

Result (ERP) = S.G Reading - Cable loss + Antenna Gain
Margin = Limit – Result (ERP)

Example:

Limit @ 1732.5 MHz : 30.0 dBm
Ant. Input = 15.0 dBm Cable loss = 1.1 dB Ant. Gain = 8.0 dBi
Result = 15.0 – 1.1 + 8.0 = 21.9 dBm
Margin = 30.0 – 21.9 = 8.1 dB

4.1.3 Limit

1 W (30.0 dBm)

4.1.4 Test data

Date	:	16~17-August-2019		
Temperature	:	23.2 [°C]		
Humidity	:	58.7 [%]	Test engineer	:
Test place	:	3m Semi-anechoic chamber		<u>Chiaki Kanno</u>
Date	:	3~4-September-2019		
Temperature	:	22.1 [°C]		
Humidity	:	63.5 [%]	Test engineer	:
Test place	:	3m Semi-anechoic chamber		<u>Chiaki Kanno</u>
Date	:	17-August-2020		
Temperature	:	21.9 [°C]		
Humidity	:	55.8 [%]	Test engineer	:
Test place	:	3m Semi-anechoic chamber		<u>Chiaki Kanno</u>
Date	:	17~18-August-2020		
Temperature	:	22.9 [°C]		
Humidity	:	64.3 [%]	Test engineer	:
Test place	:	3m Semi-anechoic chamber		<u>Chiaki Kanno</u>

[WCDMA Band IV]

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1712.4	-27.8	16.4	1.1	5.5	20.8	30.0	9.2
H	1732.6	-27.8	16.0	1.1	5.2	20.1	30.0	9.9
H	1752.6	-27.9	17.8	1.1	5.0	21.7	30.0	8.3

**[LTE Band IV]
QPSK, BW 1.4MHz**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1710.7	-27.4	16.9	1.1	5.5	21.3	30.0	8.7
H	1732.5	-27.5	17.3	1.1	5.2	21.4	30.0	8.6
H	1754.3	-27.5	18.2	1.1	5.0	22.1	30.0	7.9

16QAM, BW 1.4MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1710.7	-28.4	15.9	1.1	5.5	20.3	30.0	9.7
H	1732.5	-28.2	16.8	1.1	5.2	20.9	30.0	9.1
H	1754.3	-28.7	17.0	1.1	5.0	20.9	30.0	9.1

64QAM, BW 1.4MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1710.7	-29.2	15.1	1.1	5.5	19.5	30.0	10.5
H	1732.5	-29.3	15.7	1.1	5.2	19.8	30.0	10.2
H	1754.3	-29.5	16.2	1.1	5.0	20.1	30.0	9.9

QPSK, BW 3MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1711.5	-27.3	16.9	1.1	5.5	21.3	30.0	8.7
H	1732.5	-27.3	17.4	1.1	5.2	21.5	30.0	8.5
H	1753.5	-27.7	18.2	1.1	5.0	22.1	30.0	7.9

16QAM, BW 3MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1711.5	-28.4	15.8	1.1	5.5	20.2	30.0	9.8
H	1732.5	-27.9	16.8	1.1	5.2	20.9	30.0	9.1
H	1753.5	-28.5	17.4	1.1	5.0	21.3	30.0	8.7

64QAM, BW 3MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1711.5	-29.2	15.0	1.1	5.5	19.4	30.0	10.6
H	1732.5	-28.9	15.8	1.1	5.2	19.9	30.0	10.1
H	1753.5	-29.5	16.4	1.1	5.0	20.3	30.0	9.7

QPSK, BW 5MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1712.5	-27.4	16.7	1.1	5.5	21.1	30.0	8.9
H	1732.5	-27.1	17.6	1.1	5.2	21.7	30.0	8.3
H	1752.5	-27.6	18.2	1.1	5.0	22.1	30.0	7.9

16QAM, BW 5MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1712.5	-28.2	15.9	1.1	5.5	20.3	30.0	9.7
H	1732.5	-28.0	16.7	1.1	5.2	20.8	30.0	9.2
H	1752.5	-28.4	17.4	1.1	5.0	21.3	30.0	8.7

64QAM, BW 5MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1712.5	-29.2	14.9	1.1	5.5	19.3	30.0	10.7
H	1732.5	-28.8	15.9	1.1	5.2	20.0	30.0	10.0
H	1752.5	-29.5	16.3	1.1	5.0	20.2	30.0	9.8

QPSK, BW 10MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1715.0	-27.0	17.0	1.1	5.4	21.3	30.0	8.7
H	1732.5	-26.9	17.8	1.1	5.2	21.9	30.0	8.1
H	1750.0	-27.6	18.2	1.1	5.0	22.2	30.0	7.8

16QAM, BW 10MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1715.0	-28.3	15.7	1.1	5.4	20.0	30.0	10.0
H	1732.5	-27.7	17.0	1.1	5.2	21.1	30.0	8.9
H	1750.0	-28.4	17.4	1.1	5.0	21.4	30.0	8.6

64QAM, BW 10MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1715.0	-29.0	15.0	1.1	5.4	19.3	30.0	10.7
H	1732.5	-28.8	15.9	1.1	5.2	20.0	30.0	10.0
H	1750.0	-29.4	16.4	1.1	5.0	20.4	30.0	9.6

QPSK, BW 15MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1717.5	-27.6	16.3	1.1	5.4	20.6	30.0	9.4
H	1732.5	-27.3	17.3	1.1	5.2	21.4	30.0	8.6
H	1747.5	-27.5	18.3	1.1	5.1	22.3	30.0	7.7

16QAM, BW 15MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1717.5	-28.7	15.2	1.1	5.4	19.5	30.0	10.5
H	1732.5	-28.0	16.6	1.1	5.2	20.7	30.0	9.3
H	1747.5	-28.7	17.1	1.1	5.1	21.1	30.0	8.9

64QAM, BW 15MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1717.5	-29.5	14.4	1.1	5.4	18.7	30.0	11.3
H	1732.5	-29.0	15.6	1.1	5.2	19.7	30.0	10.3
H	1747.5	-29.7	16.1	1.1	5.1	20.1	30.0	9.9

QPSK, BW 20MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1720.0	-27.1	16.8	1.1	5.4	21.1	30.0	8.9
H	1732.5	-27.0	17.6	1.1	5.2	21.7	30.0	8.3
H	1745.0	-26.9	16.1	1.1	5.1	20.1	30.0	9.9

16QAM, BW 20MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1720.0	-28.2	15.7	1.1	5.4	20.0	30.0	10.0
H	1732.5	-28.5	16.1	1.1	5.2	20.2	30.0	9.8
H	1745.0	-29.1	13.9	1.1	5.1	17.9	30.0	12.1

64QAM, BW 20MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1720.0	-29.3	14.6	1.1	5.4	18.9	30.0	11.1
H	1732.5	-29.5	15.1	1.1	5.2	19.2	30.0	10.8
H	1745.0	-29.9	13.1	1.1	5.1	17.1	30.0	12.9

4.2 Peak to Average Ratio

4.2.1 Measurement procedure


[FCC 27.50]

The peak to average ratio was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;

- a) Power Stat CCDF mode
- b) Set resolution / measurement bandwidth $\geq$ signal's occupied bandwidth.
- c) Set the number of counts to a value that stabilizes the measured CCDF curve.
- d) Set the measurement interval as follows:
 - 1) For continuous transmissions, set to 1ms.
 - 2) For burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst duration.
- e) Record the maximum PAPR level associated with a probability of 0.1%.

- Test configuration

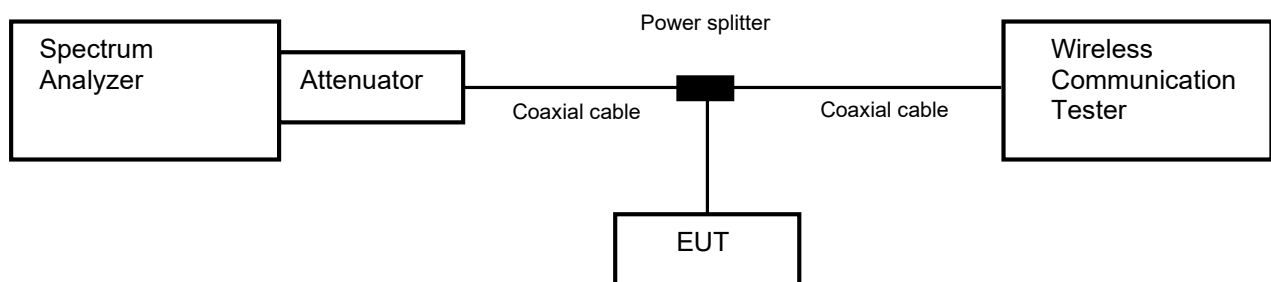

4.2.2 Limit

13 dB or less

4.2.3 Measurement result

Date : 26-August-2020

Temperature : 22.6 [°C]

Humidity : 57.6 [%]

Test place : Shielded room No.4

Test engineer :


Chiaki Kanno

Band	Channel	Frequency [MHz]	Peak to Average Power Ratio [dB]	Limit [dB]
WCDMA Band IV	1312	1712.4	3.22	13.0
	1413	1732.6	3.34	
	1513	1752.6	2.94	


Band	Channel	Frequency [MHz]	Modulation	Bandwidth [MHz]	RB	Peak to Average Power Ratio [dB]	Limit [dB]
LTE Band IV	20175	1732.5	QPSK	1.4	6-0	5.74	13.0
				3	15-0	6.00	
				5	25-0	5.92	
				10	50-0	4.63	
				15	75-0	5.85	
				20	100-0	6.54	
			16QAM	1.4	6-0	6.82	
				3	15-0	6.75	
				5	25-0	6.56	
				10	50-0	6.37	
				15	75-0	6.87	
				20	100-0	7.24	
			64QAM	1.4	6-0	6.82	
				3	15-0	6.88	
				5	25-0	6.76	
				10	50-0	6.69	
				15	75-0	7.14	
				20	100-0	7.35	

4.2.4 Trace data


[WCDMA Band IV]
Channel: 1312

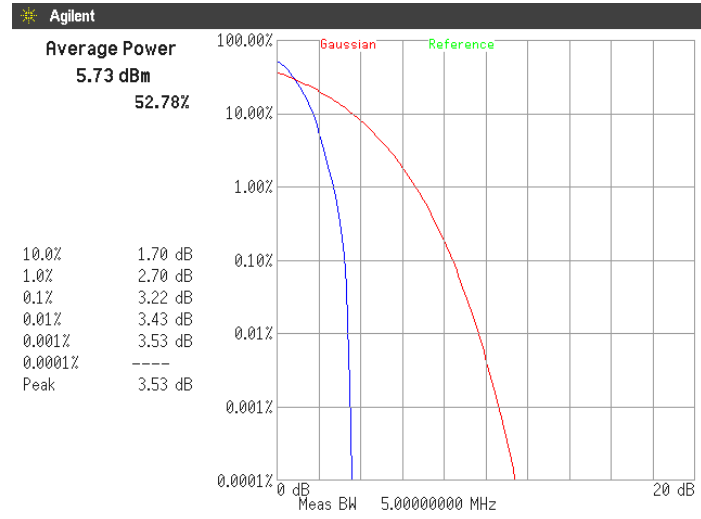

Channel: 1413

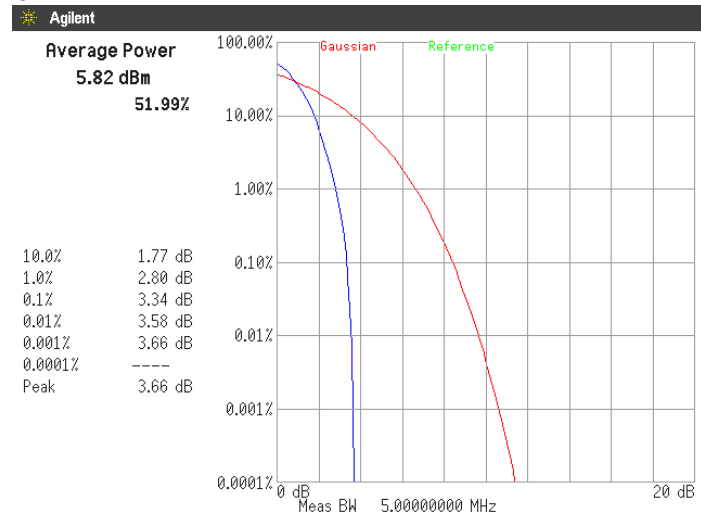


Channel: 1513

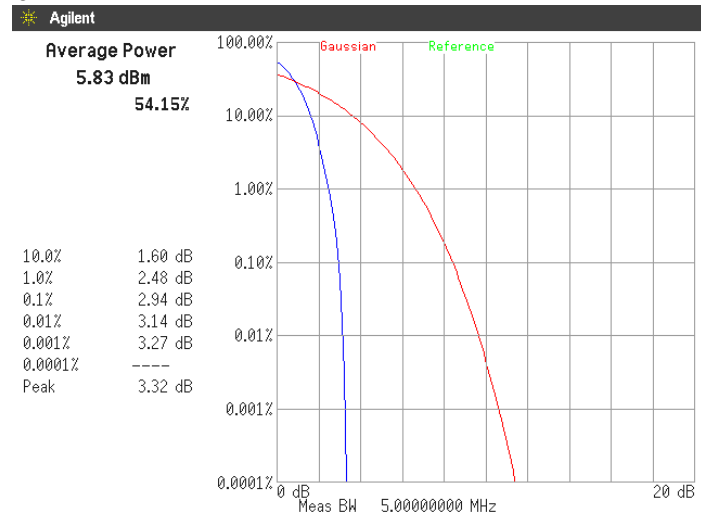


[LTE Band IV]

Channel: 20175


QPSK, BW 1.4MHz, RB6-0

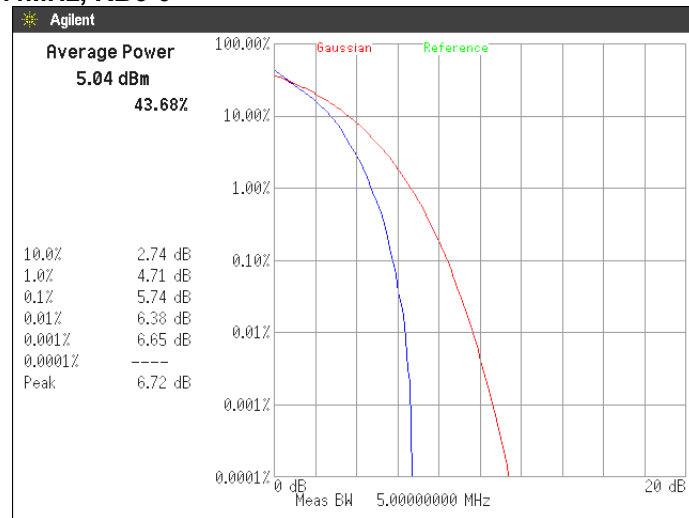

QPSK, BW 3MHz, RB15-0

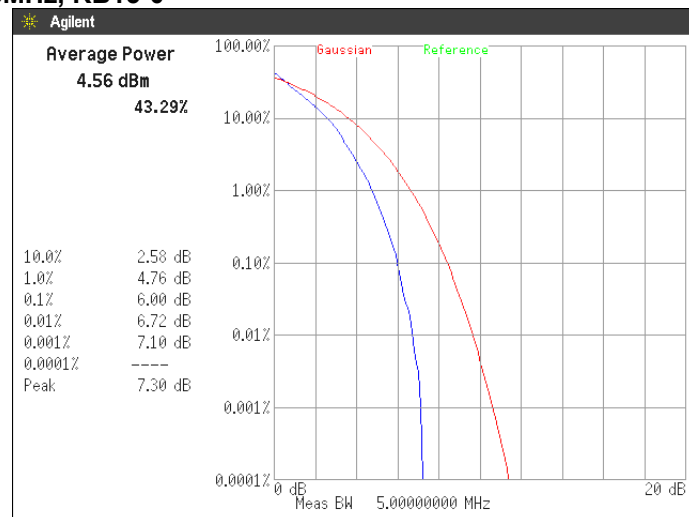


QPSK, BW 5MHz, RB25-0

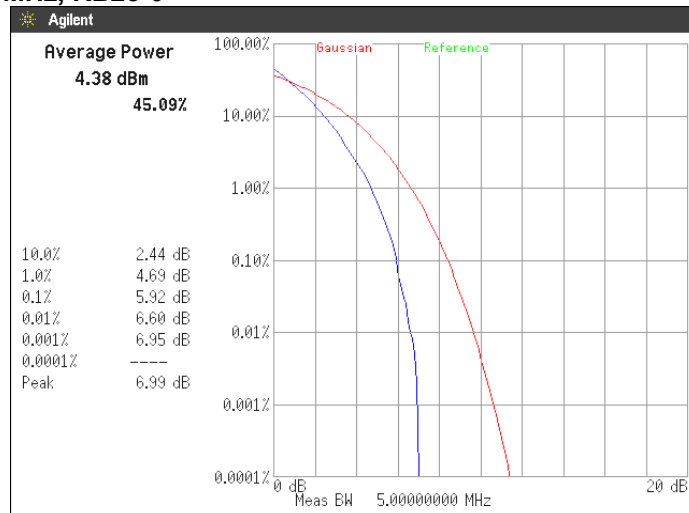


Channel: 20175


QPSK, BW 10MHz, RB50-0

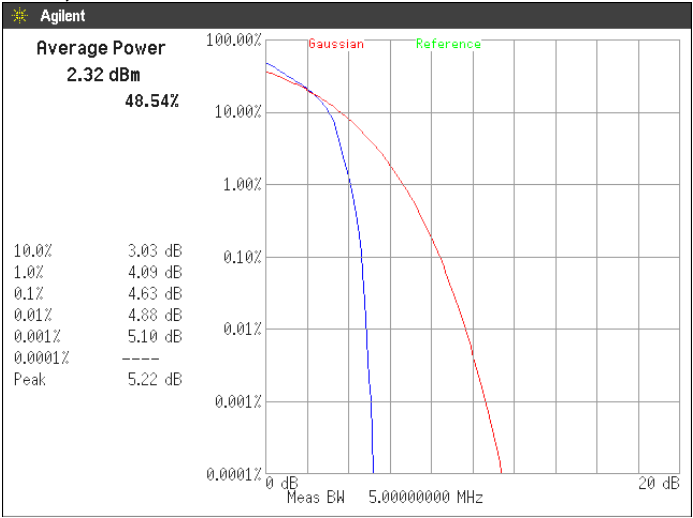


QPSK, BW 15MHz, RB75-0

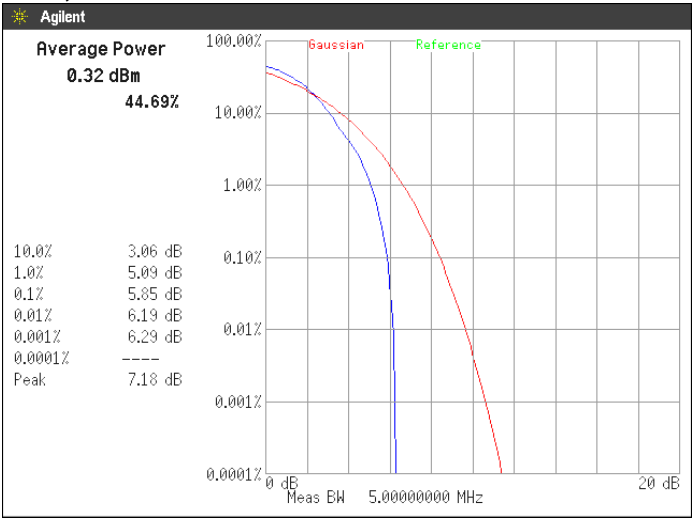


QPSK, BW 20MHz, RB100-0

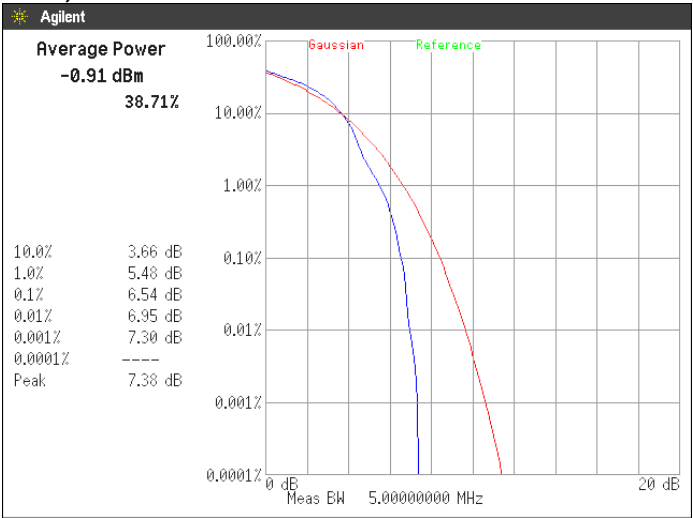


Channel: 20175
16QAM, BW 1.4MHz, RB6-0

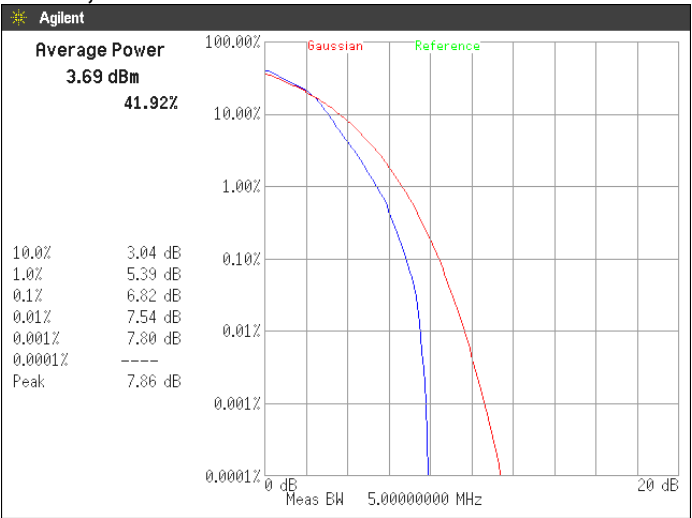


16QAM, BW 3MHz, RB15-0

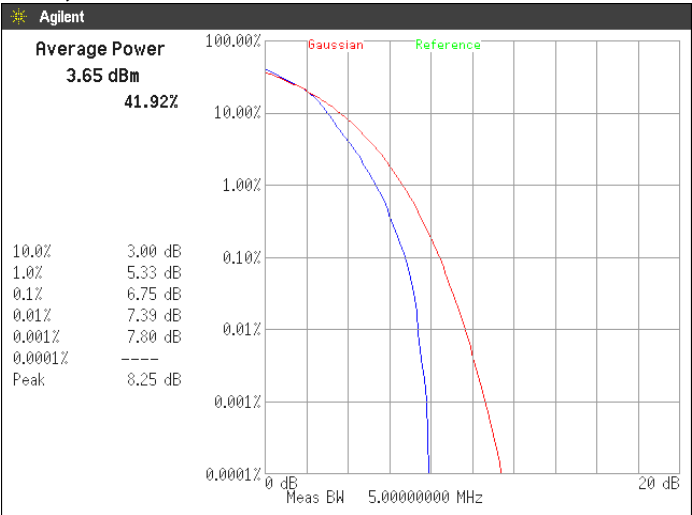


16QAM, BW 5MHz, RB25-0

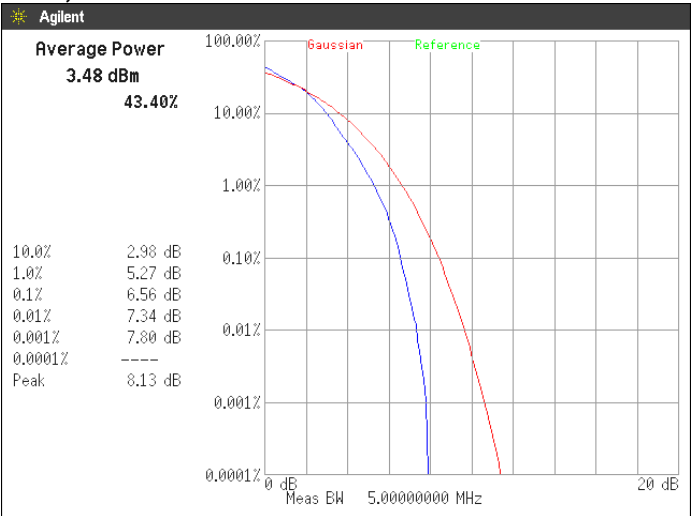


Channel: 20175
16QAM, BW 10MHz, RB50-0

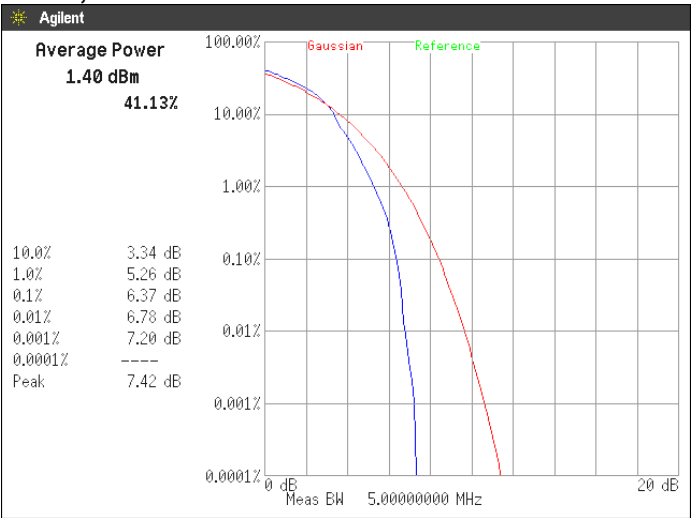


16QAM, BW 15MHz, RB75-0

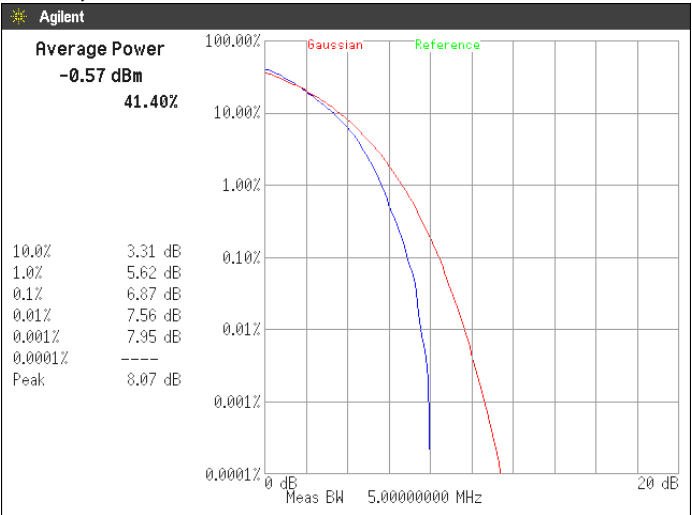


16QAM, BW 20MHz, RB100-0

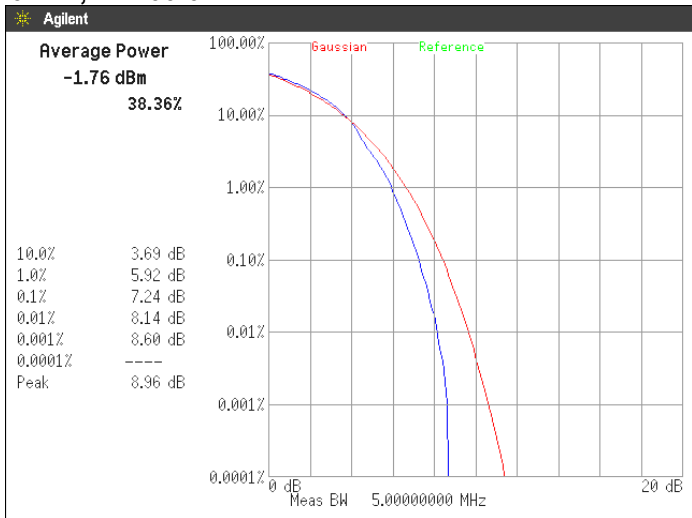


Channel: 20175
64QAM, BW 1.4MHz, RB6-0

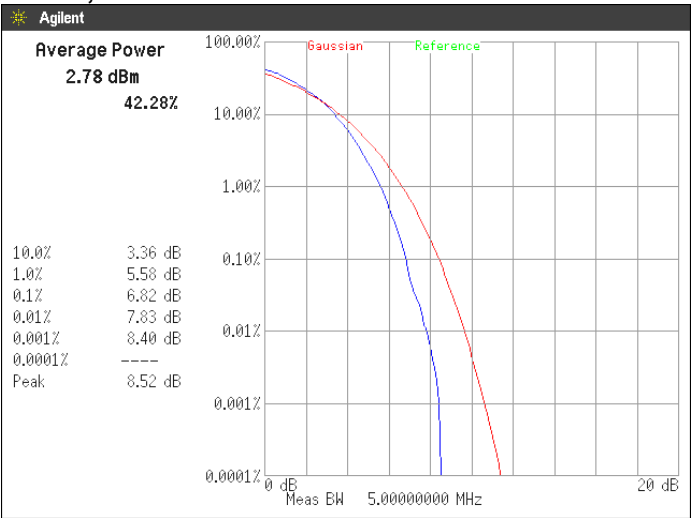


64QAM, BW 3MHz, RB15-0

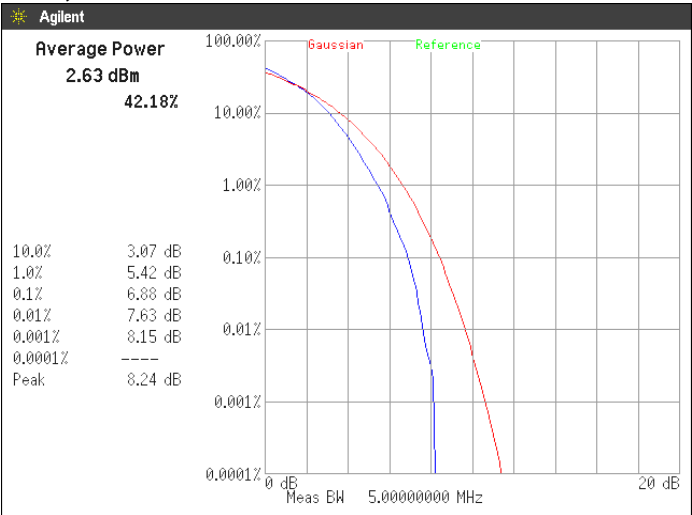


64QAM, BW 5MHz, RB25-0

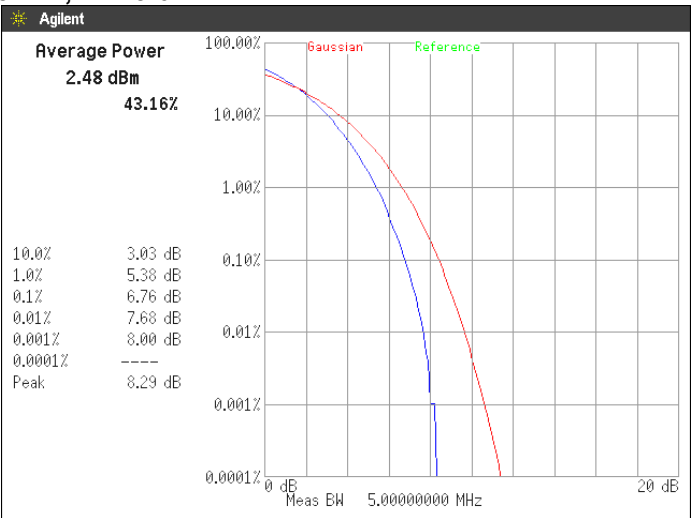


Channel: 20175
64QAM, BW 10MHz, RB50-0

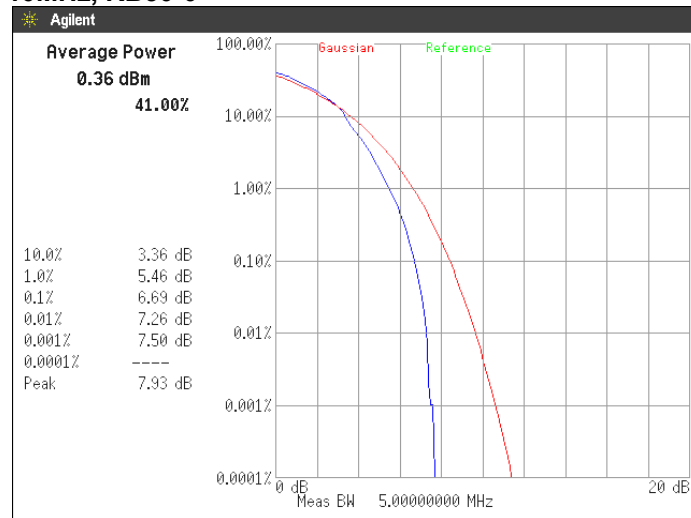

64QAM, BW 15MHz, RB75-0

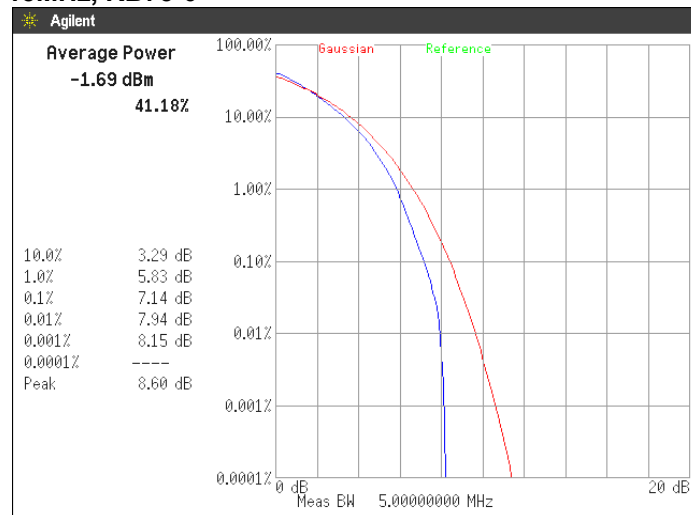

64QAM, BW 20MHz, RB100-0

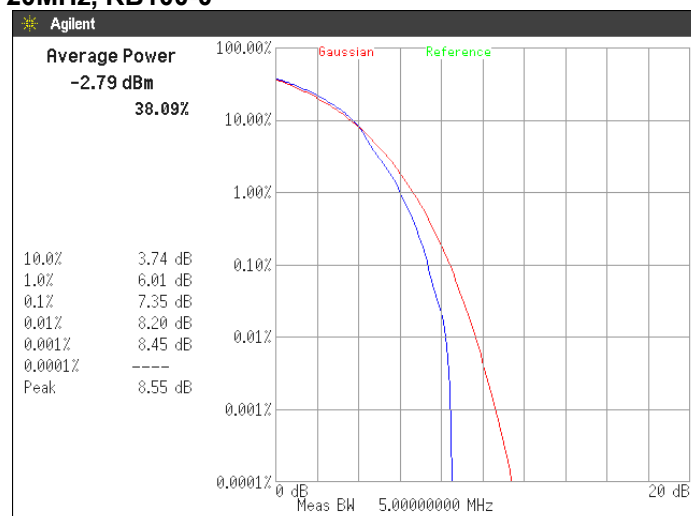

4.3 Occupied Bandwidth

4.3.1 Measurement procedure


[FCC 2.1049]

The Occupied bandwidth was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;

- a) RBW = 1-5% of the expected OBW & VBW $\geq 3 \times$ RBW
- b) Detector = Peak
- c) Trace mode = Max hold
- d) Sweep time = auto-couple

- Test configuration

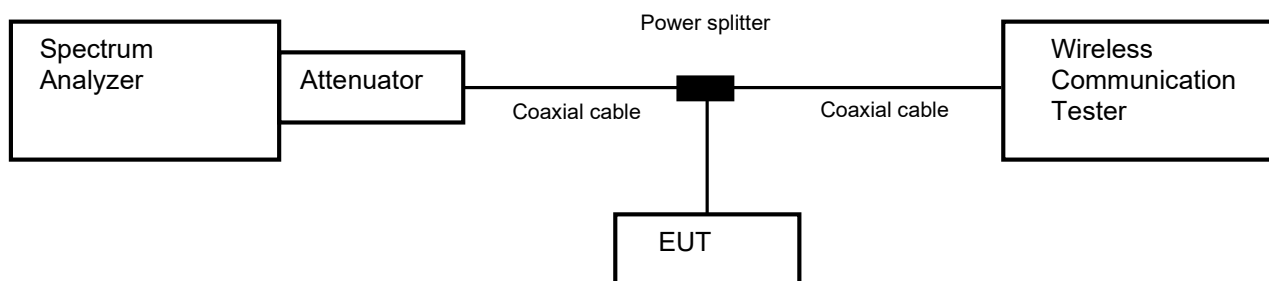

4.3.2 Limit

None

4.3.3 Measurement result

Date : 30-July-2020
Temperature : 23.8 [°C]
Humidity : 51.2 [%]
Test place : Shielded room No.4

Test engineer : Chiaki Kanno

Date : 26-August-2020
Temperature : 22.6 [°C]
Humidity : 57.6 [%]
Test place : Shielded room No.4


Test engineer : Chiaki Kanno

Band	Channel	Frequency [MHz]	Test Result [MHz]
WCDMA Band IV	1312	1712.4	4.1661
	1413	1732.6	4.1619
	1513	1752.6	4.1712


Band	Channel	Frequency [MHz]	Bandwidth [MHz]	Modulation	RB	Test Result [MHz]
LTE Band IV	20175	1732.5	1.4	QPSK	3-1	0.5956
					6-0	1.1088
				16QAM	3-1	0.5939
					6-0	1.0939
				64QAM	3-1	0.5962
					6-0	1.0954
			3	QPSK	8-4	1.4916
					15-0	2.6923
				16QAM	8-4	1.5133
					15-0	2.6934
				64QAM	8-4	1.5070
					15-0	2.6950
			5	QPSK	12-7	2.2791
					25-0	4.5036
				16QAM	12-7	2.2920
					25-0	4.4934
				64QAM	12-7	2.2816
					25-0	4.5126
			10	QPSK	25-12	4.6490
					50-0	8.9969
				16QAM	25-12	4.6448
					50-0	8.9920
				64QAM	25-12	4.6339
					50-0	8.9800
			15	QPSK	36-20	6.6631
					75-0	13.4796
				16QAM	36-20	6.7025
					75-0	13.4805
				64QAM	36-20	6.7116
					75-0	13.4938
			20	QPSK	50-24	9.2104
					100-0	17.9536
				16QAM	50-24	9.1978
					100-0	17.9669
				64QAM	50-24	9.1637
					100-0	17.9494

4.3.4 Trace data


[WCDMA Band IV] Channel: 1312

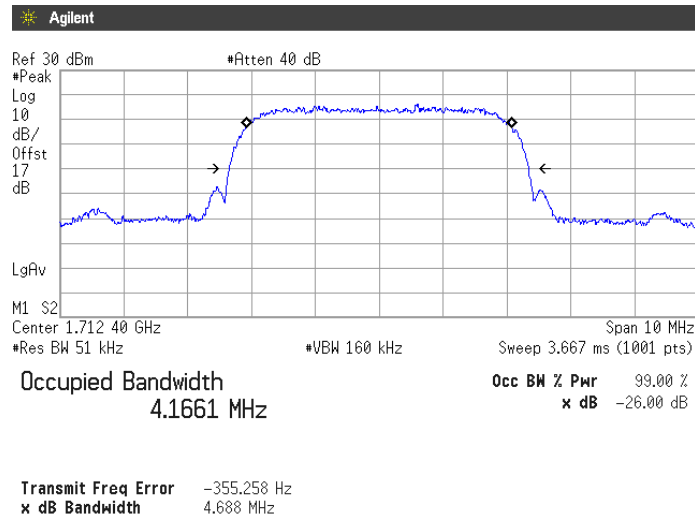

Channel: 1413

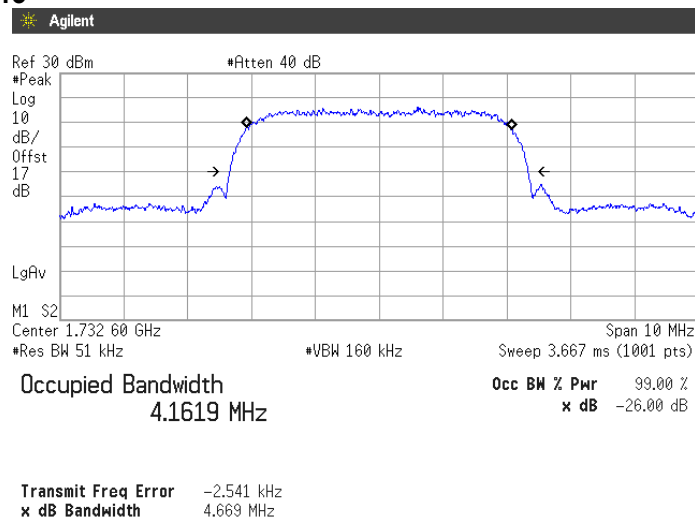


Channel: 1513

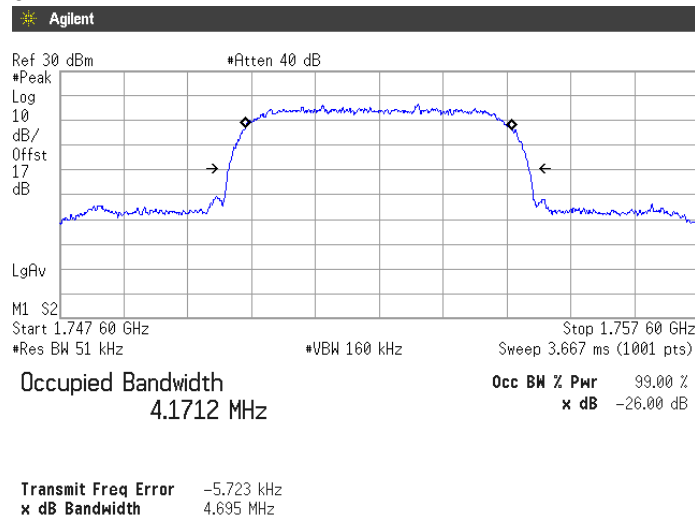


[LTE Band IV]
Channel: 20175

QPSK, BW 1.4MHz

RB3-1

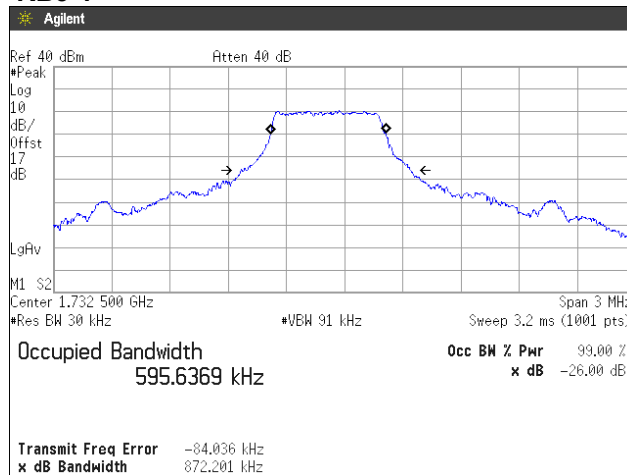


RB6-0

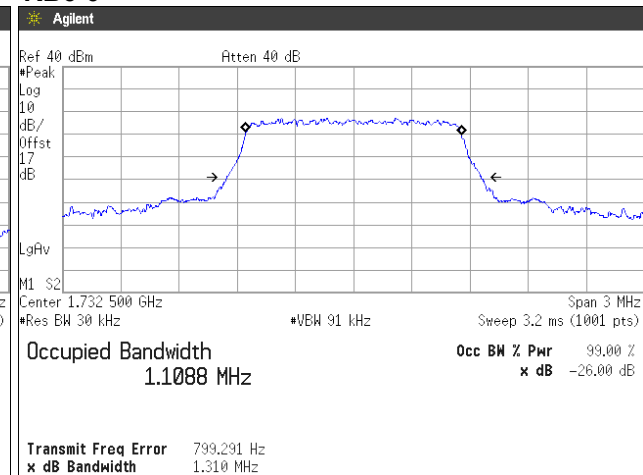


16QAM, BW 1.4MHz

RB3-1

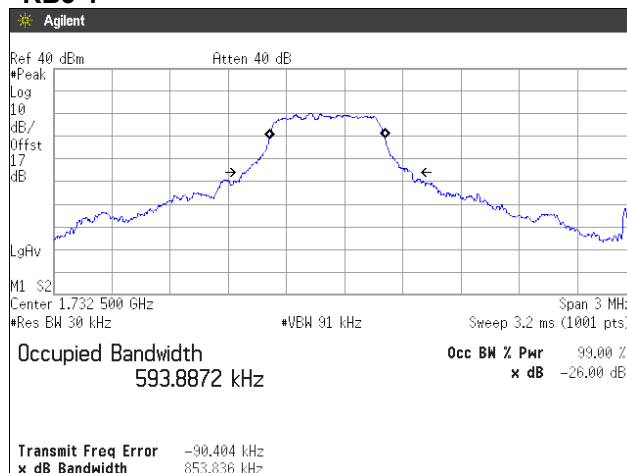


RB6-0

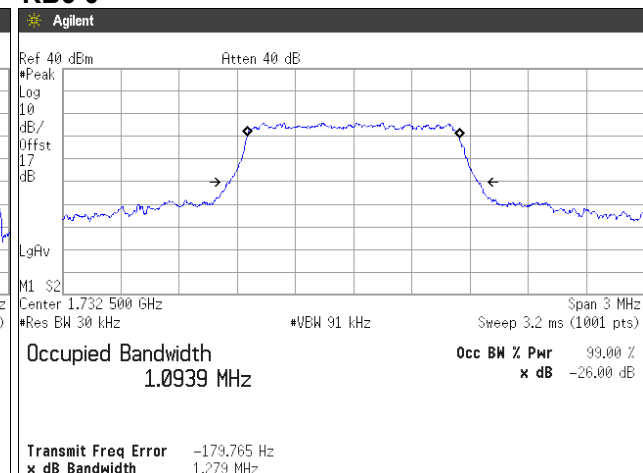








64QAM, BW 1.4MHz

RB3-1

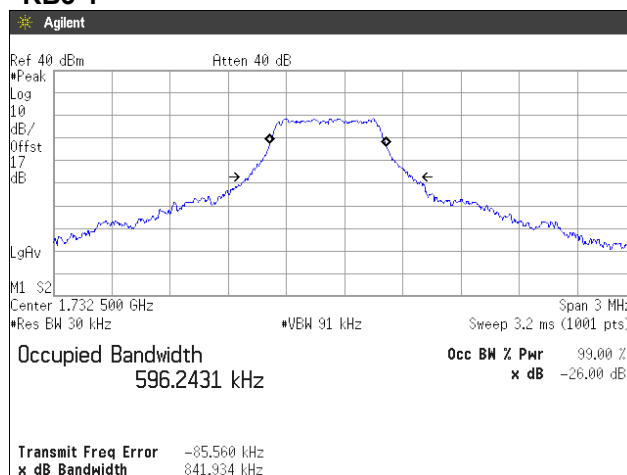


RB6-0

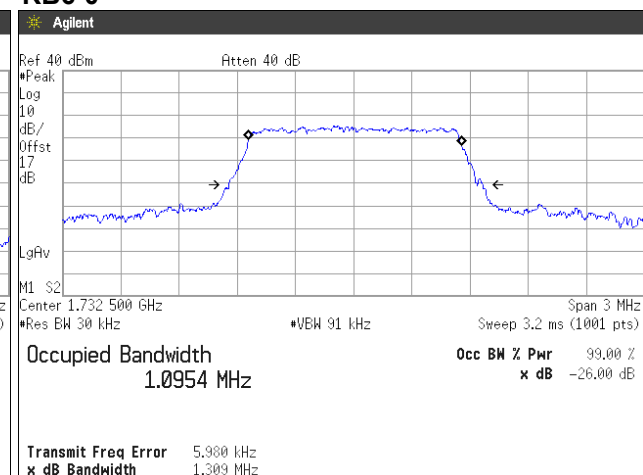


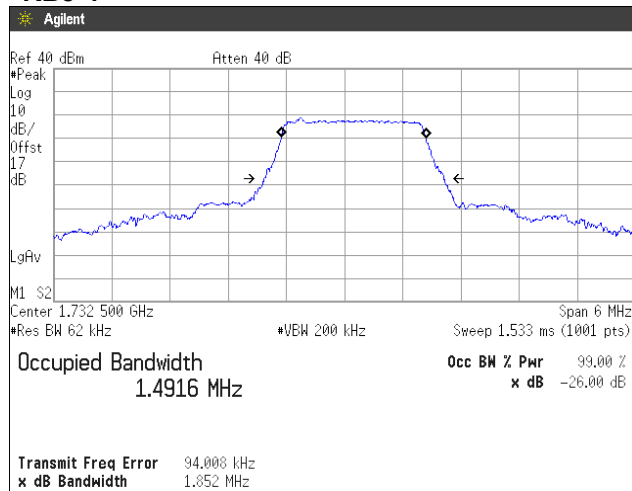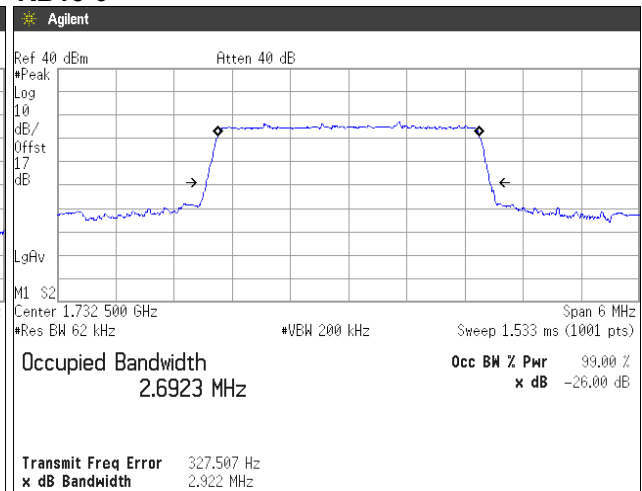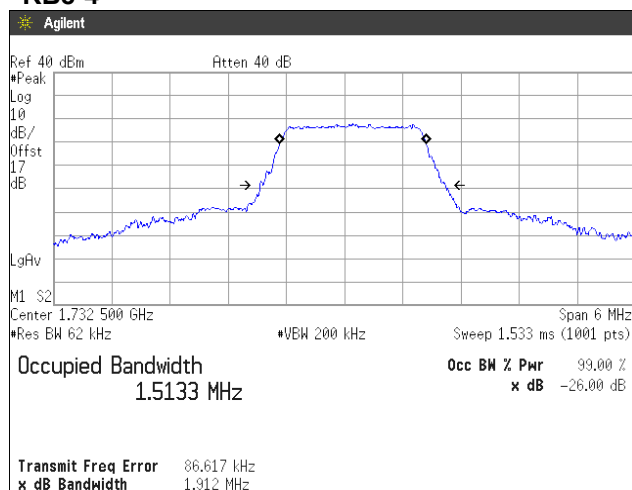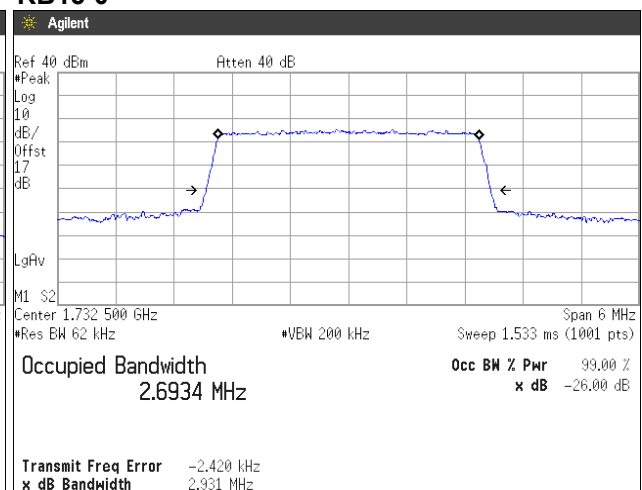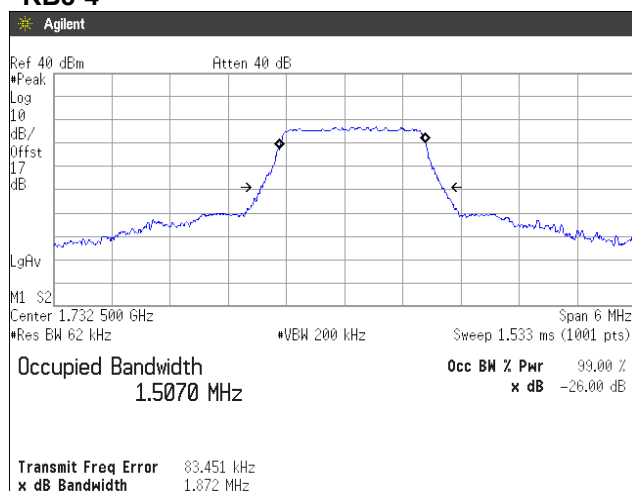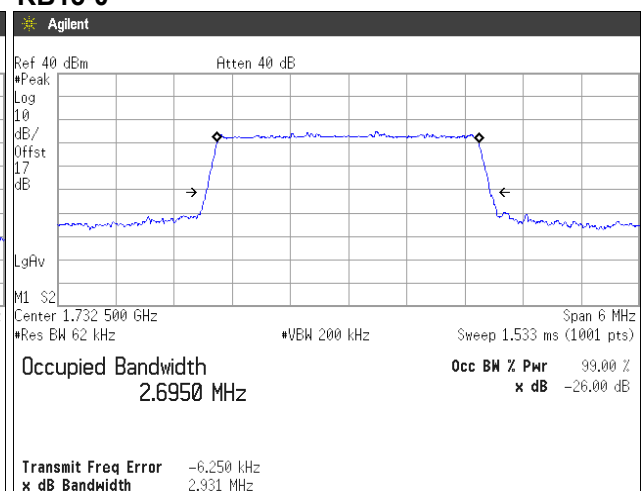QPSK, BW 3MHz**RB8-4****RB15-0****16QAM, BW 3MHz****RB8-4****RB15-0****64QAM, BW 3MHz****RB8-4****RB15-0**


QPSK, BW 5MHz RB12-7

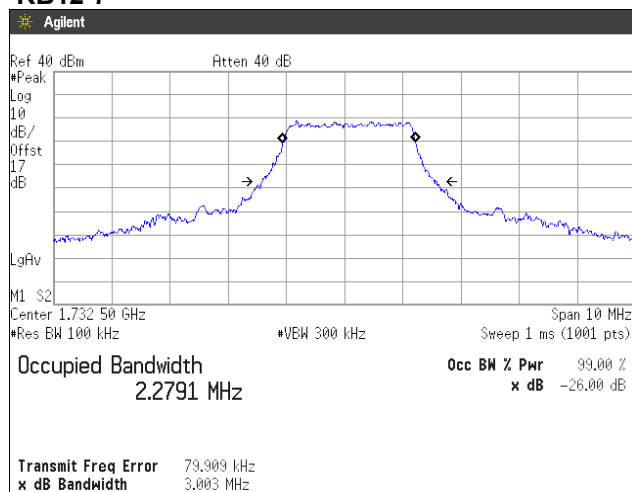


RB25-0

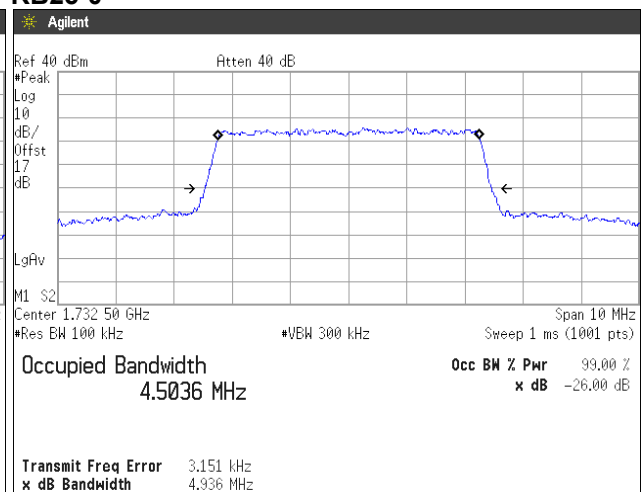


16QAM, BW 5MHz RB12-7

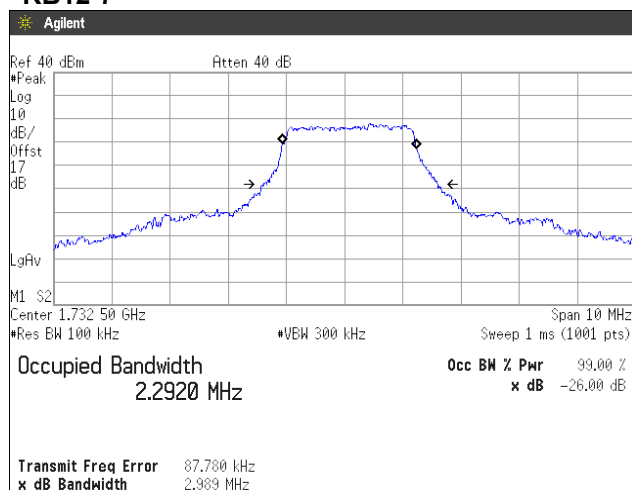


RB25-0

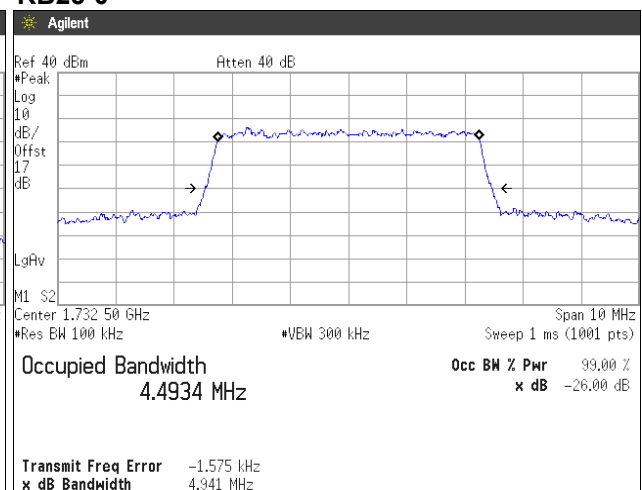


64QAM, BW 5MHz RB12-7

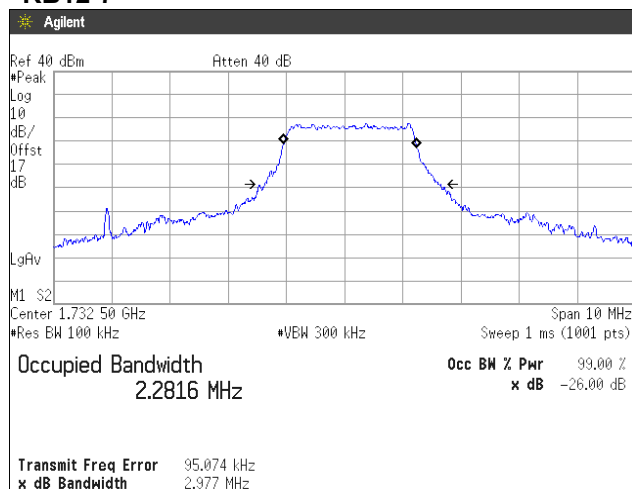


RB25-0

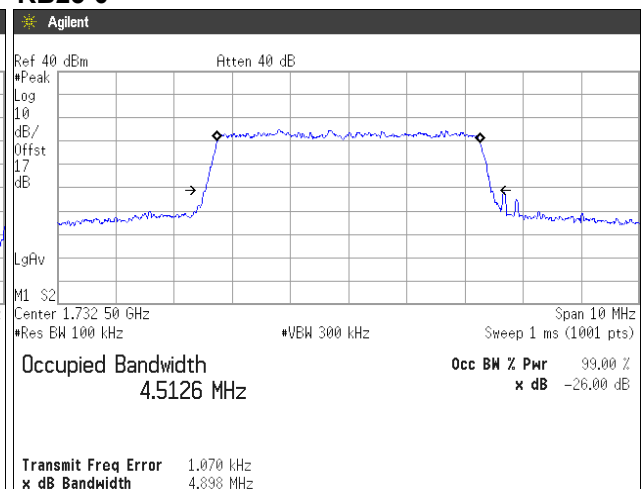


QPSK, BW 10MHz RB25-12

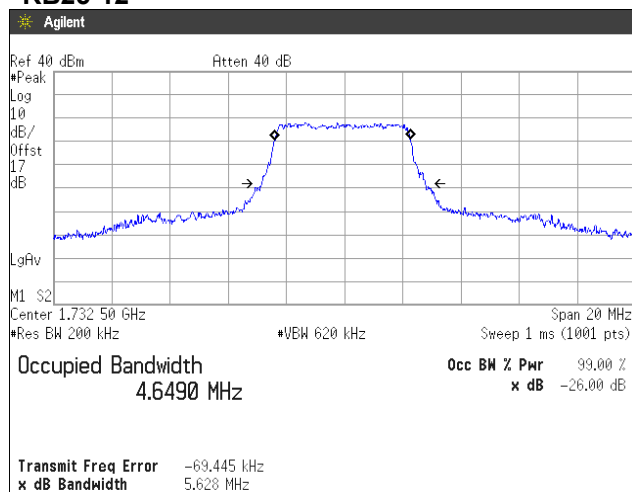


RB50-0

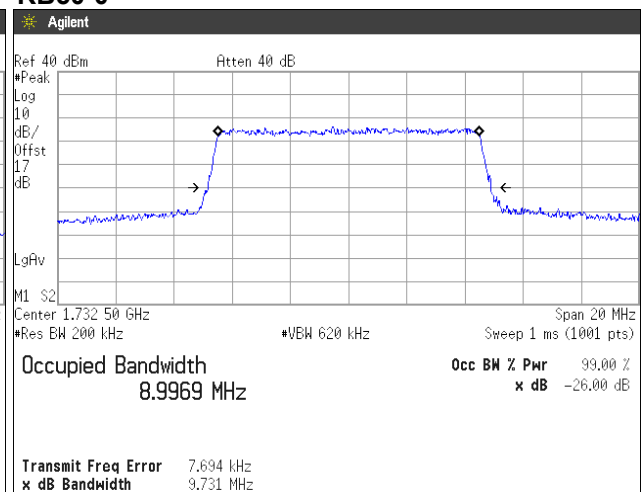


16QAM, BW 10MHz RB25-12

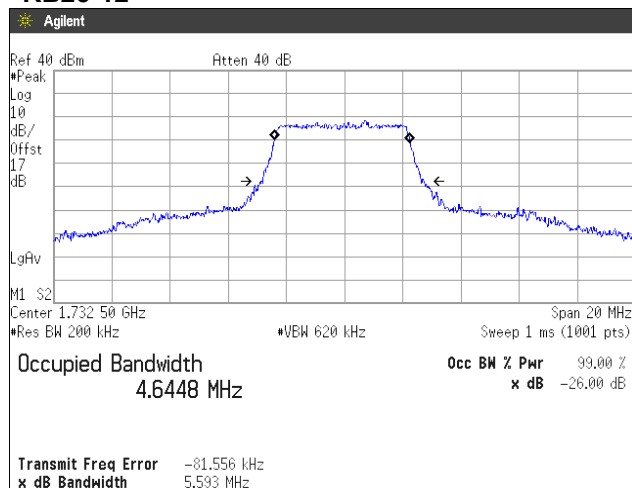


RB50-0

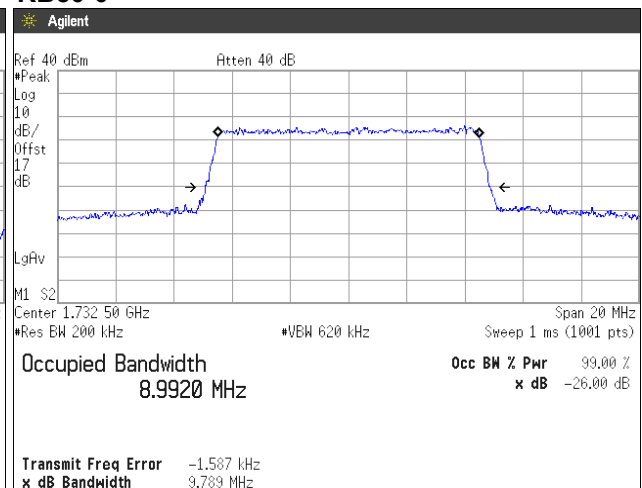


64QAM, BW 10MHz RB25-12

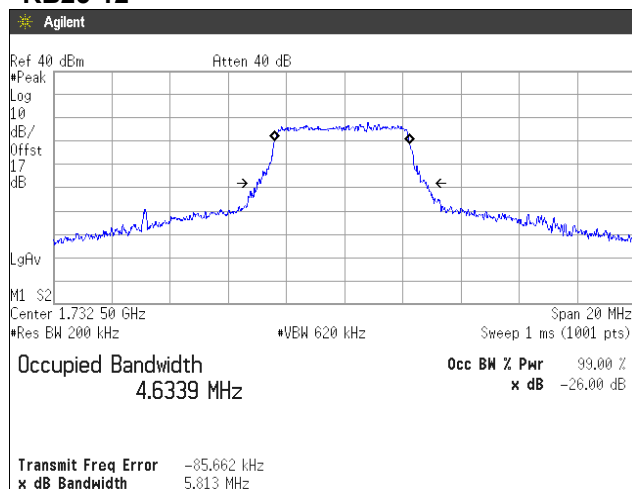


RB50-0

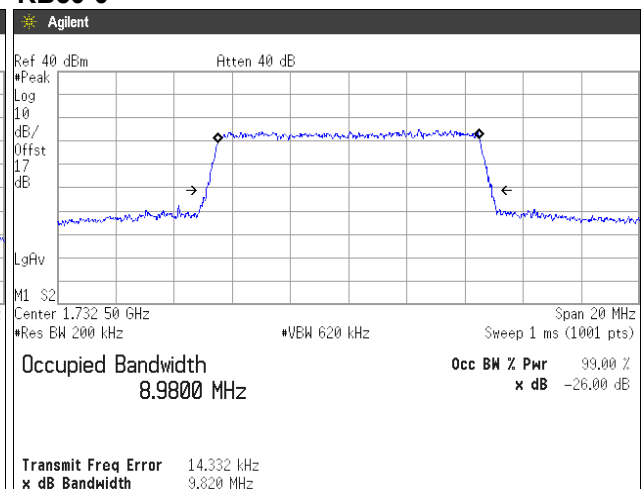


QPSK, BW 15MHz RB36-20

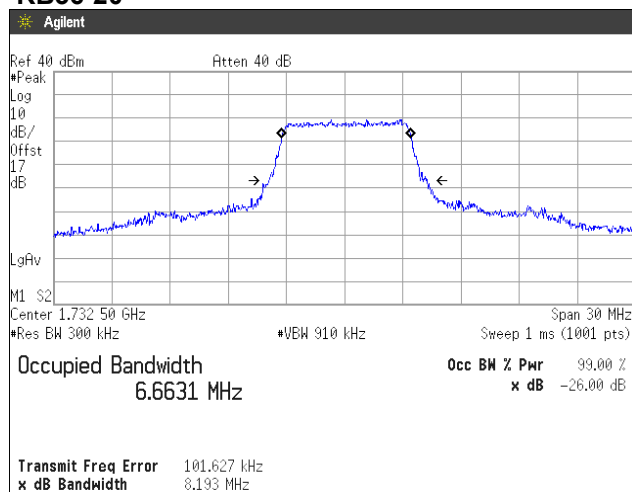


RB75-0

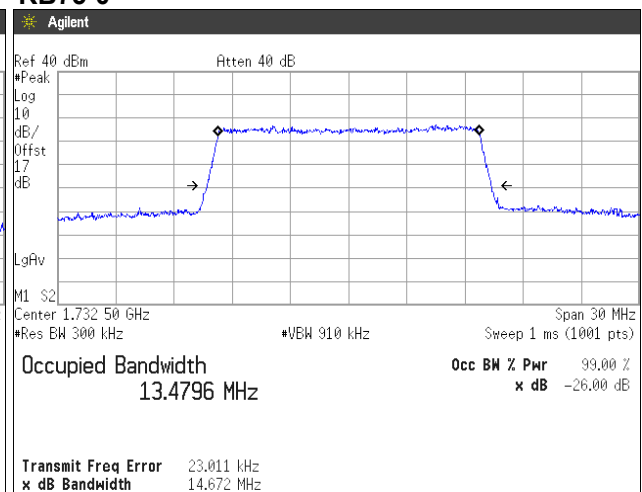


16QAM, BW 15MHz RB36-20

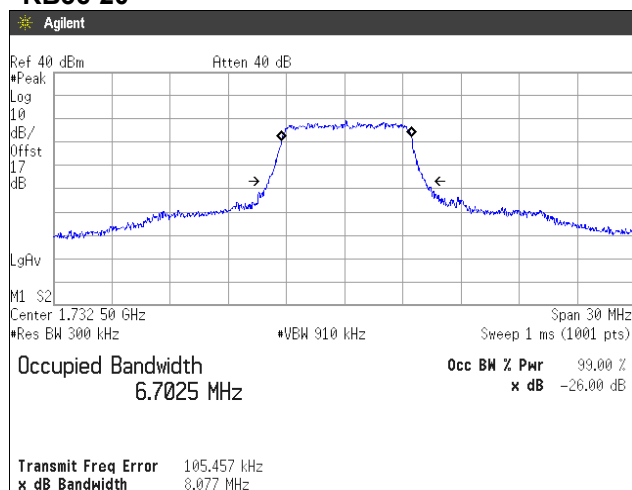


RB75-0






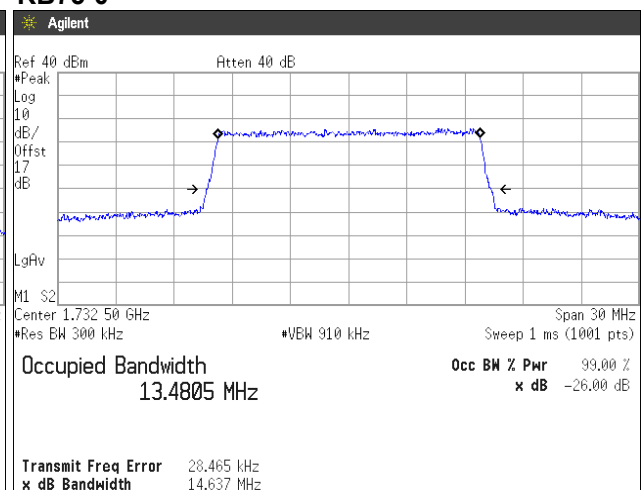


64QAM, BW 15MHz RB36-20

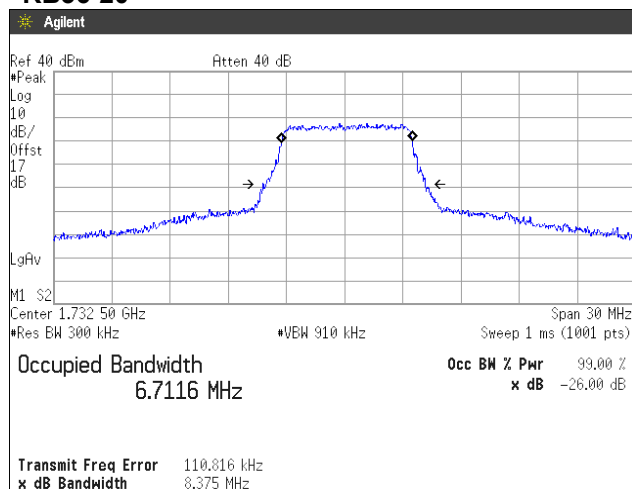

RB75-0

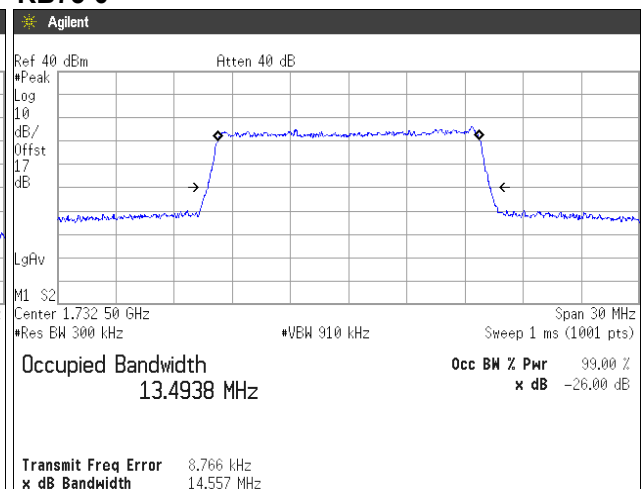

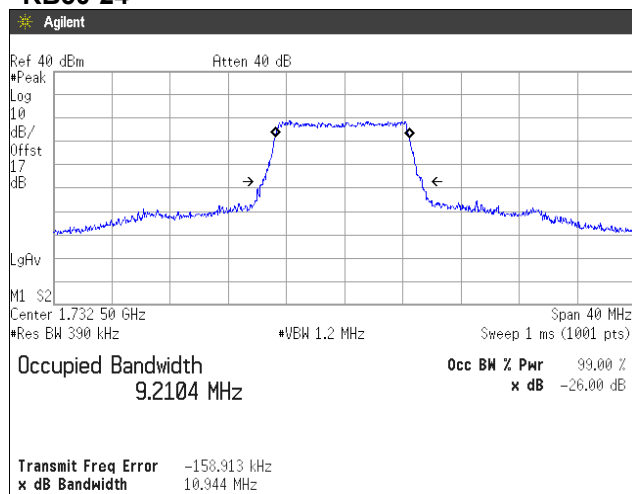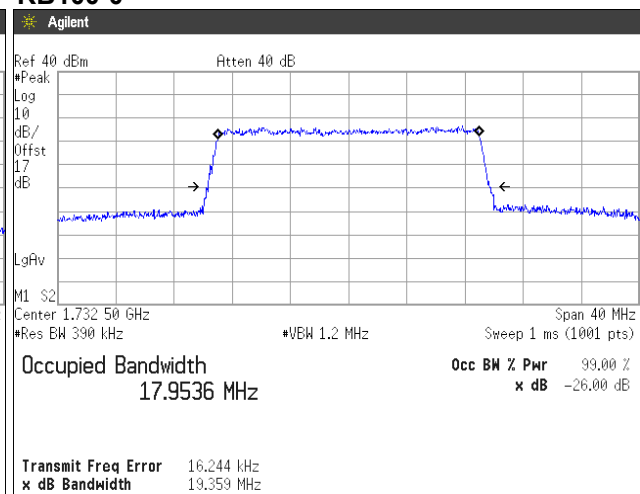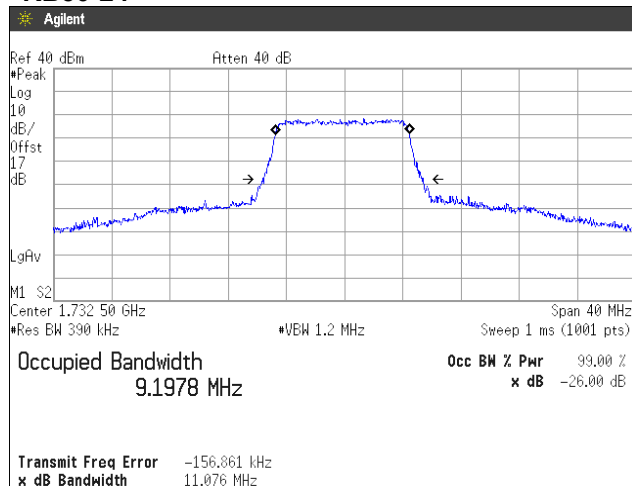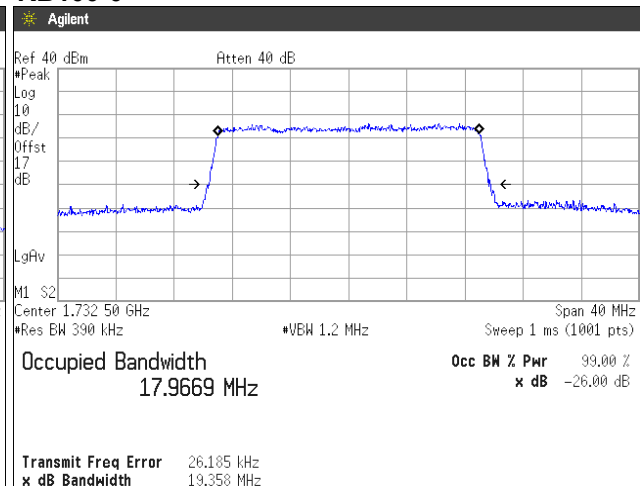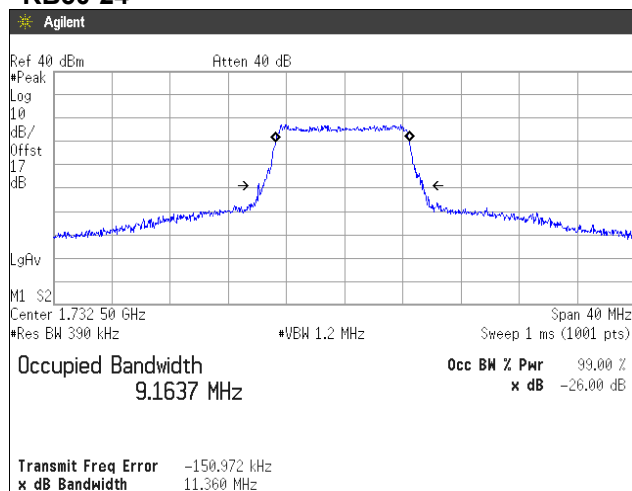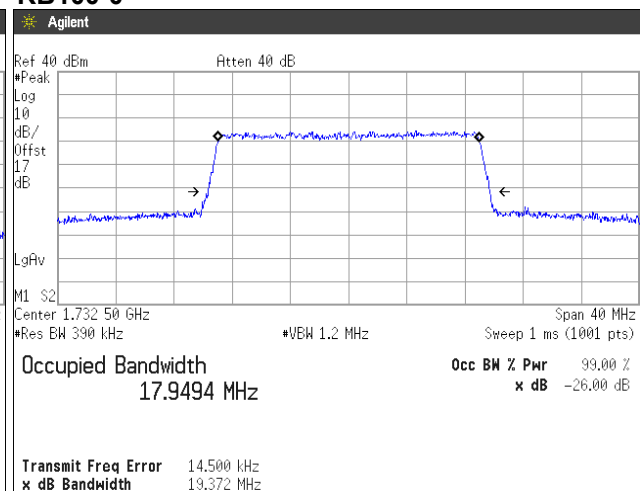QPSK, BW 20MHz
RB50-24

RB100-0

16QAM, BW 20MHz
RB50-24

RB100-0

64QAM, BW 20MHz
RB50-24

RB100-0


4.4 Band Edge Spurious and Harmonic at Antenna Terminals

4.4.1 Measurement procedure

[FCC 27.53, 2.1051]

The band edge spurious and harmonic was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;


<Band Edge>

- a) Span was set large enough so as to capture all out of band emissions near the band edge
- b) $RBW \geq 1\%$ of the emission bandwidth or 2% of the emission bandwidth
- c) $VBW \geq 3 \times RBW$
- d) Detector = RMS
- e) Trace mode = Max hold
- f) Sweep time = auto-couple
- g) Number of sweep point $\geq 2 \times \text{span} / RBW$

<Spurious Emissions>

- a) $RBW = 1\text{MHz}$ & $VBW \geq 3 \times RBW$
- b) Detector = Peak
- c) Trace mode = Max hold
- d) Sweep time = auto-couple
- e) Number of sweep point $\geq 2 \times \text{span} / RBW$

- Test configuration

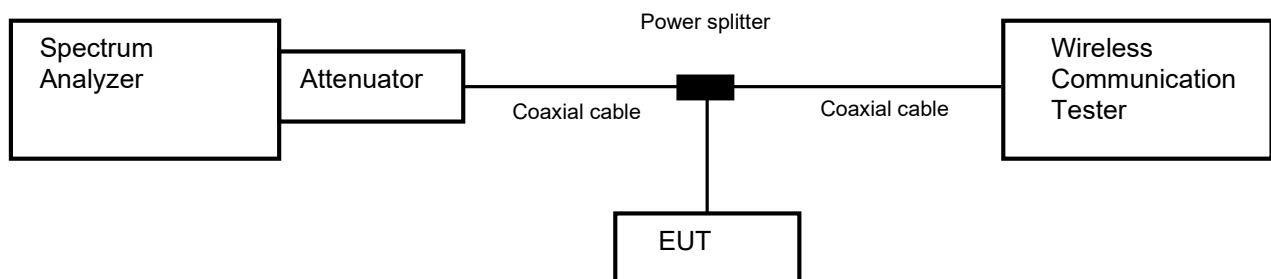

4.4.2 Limit

-13 dB or less

4.4.3 Measurement result

Date : 30-July-2020
 Temperature : 23.8 [°C]
 Humidity : 51.2 [%]
 Test place : Shielded room No.4

Test engineer : Chiaki Kanno

Date : 26-August-2020
 Temperature : 22.6 [°C]
 Humidity : 57.6 [%]
 Test place : Shielded room No.4

Test engineer : Chiaki Kanno


Band	Channel	Frequency [MHz]	Limit [dB]	Results	
WCDMA Band IV	1312	1712.4	-13.0	See the trace data	PASS
	1513	1752.6	-13.0	See the trace data	PASS

Band	Modulation	Bandwidth [MHz]	Channel	Frequency [MHz]	Limit [dB]	Results	
LTE Band IV	QPSK, 16QAM, 64QAM	1.4	19957	1710.7	-13.0	See the trace data	PASS
			20393	1754.3	-13.0	See the trace data	PASS
		3	19965	1711.5	-13.0	See the trace data	PASS
			20385	1753.5	-13.0	See the trace data	PASS
		5	19975	1712.5	-13.0	See the trace data	PASS
			20375	1752.5	-13.0	See the trace data	PASS
		10	20000	1715.0	-13.0	See the trace data	PASS
			20350	1750.0	-13.0	See the trace data	PASS
		15	20025	1717.5	-13.0	See the trace data	PASS
			20325	1747.5	-13.0	See the trace data	PASS
		20	20050	1720.0	-13.0	See the trace data	PASS
			20300	1745.0	-13.0	See the trace data	PASS


4.4.4 Trace data

[WCDMA Band IV]
(Band Edge)

Channel: 1312




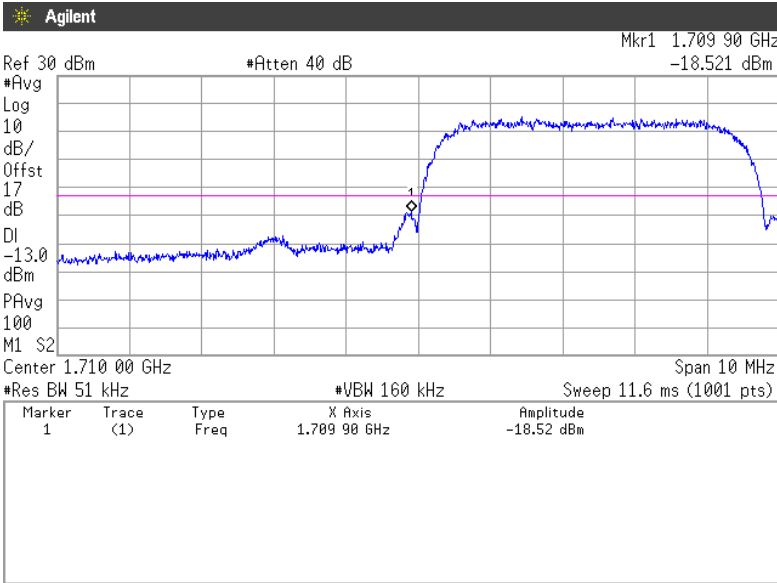






Channel: 1513




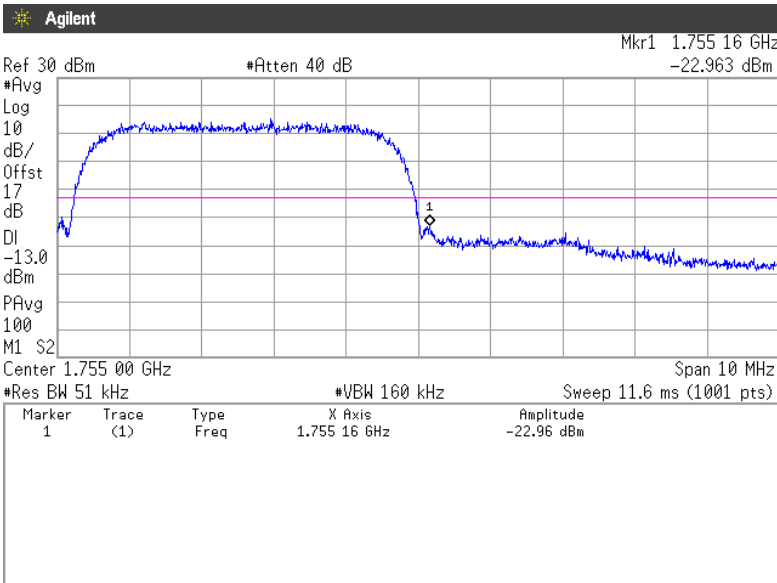


(Spurious Emissions)


Note: Conducted spurious test was measured in the worst case of conducted output power.

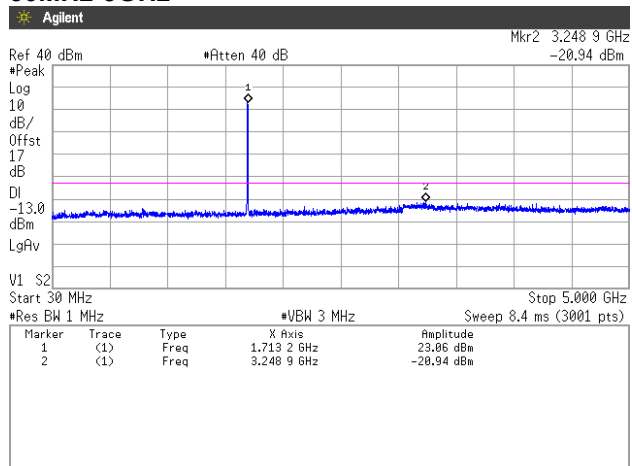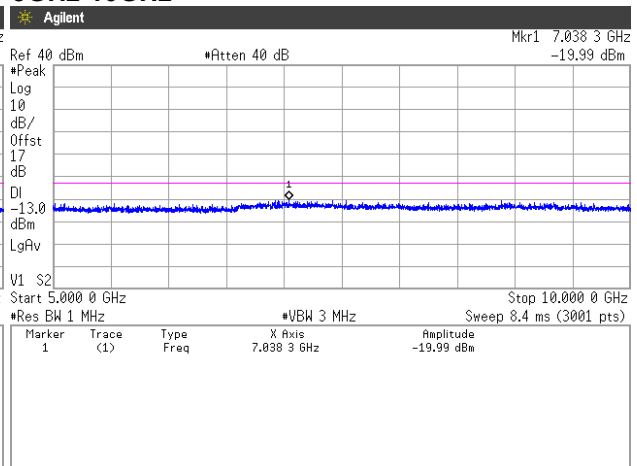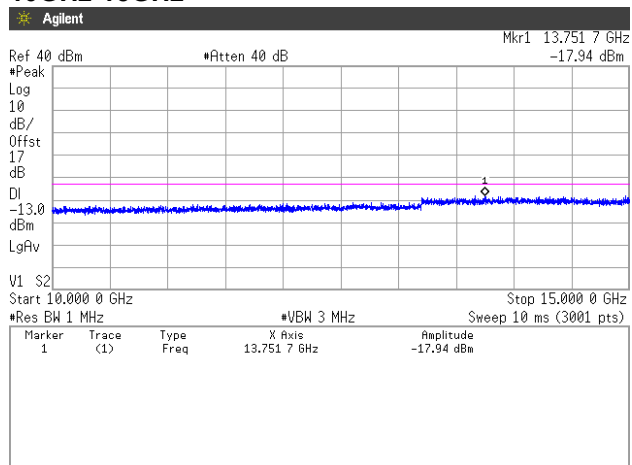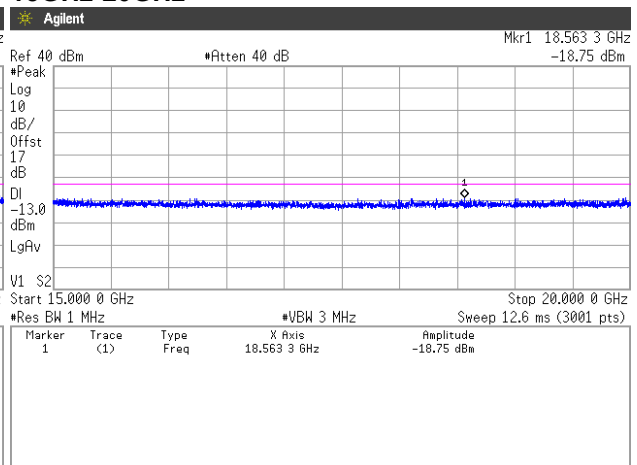Channel: 1312**30MHz-5GHz****5GHz-10GHz****10GHz-15GHz****15GHz-20GHz**

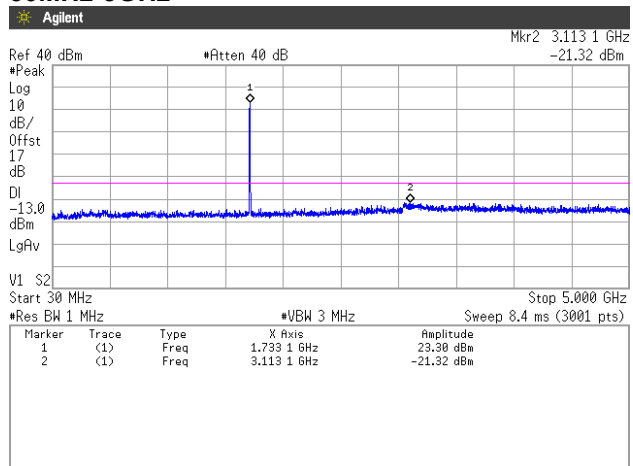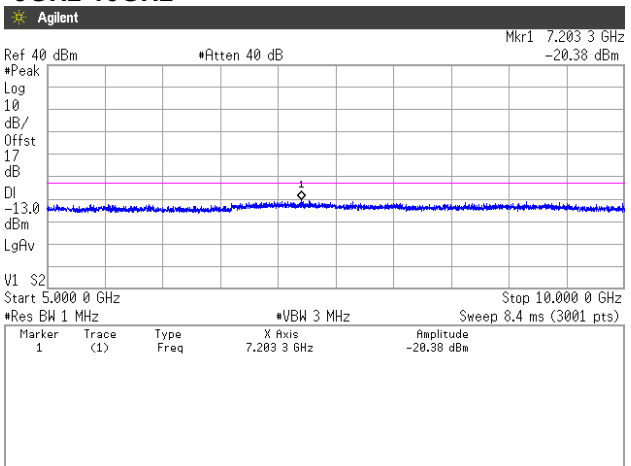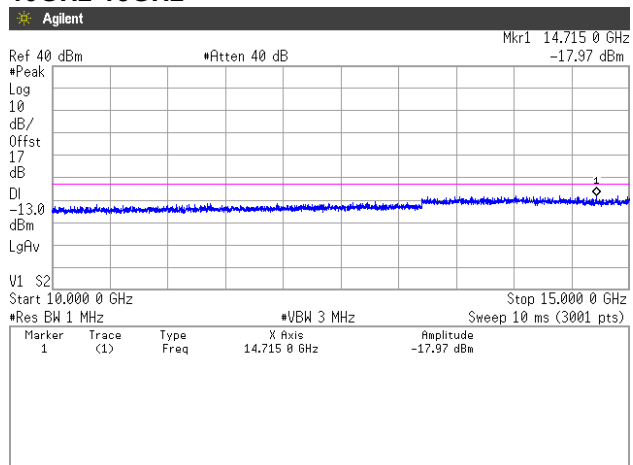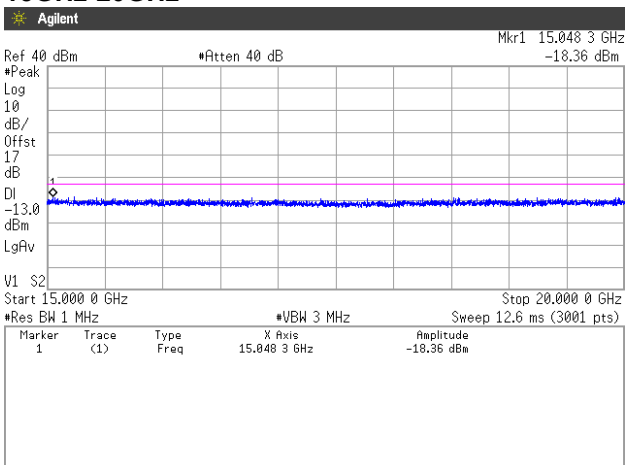
Channel: 1413**30MHz-5GHz****5GHz-10GHz****10GHz-15GHz****15GHz-20GHz**

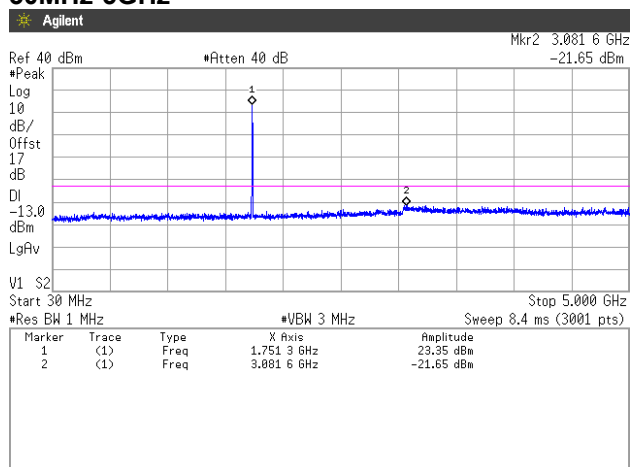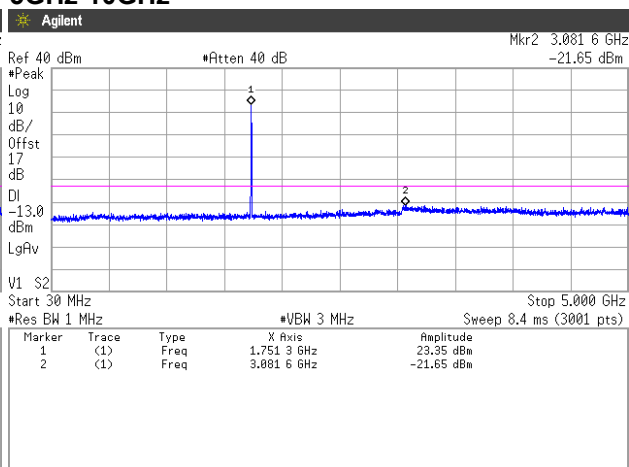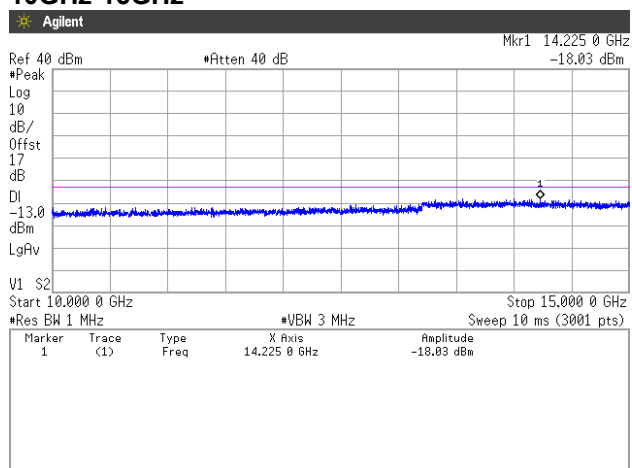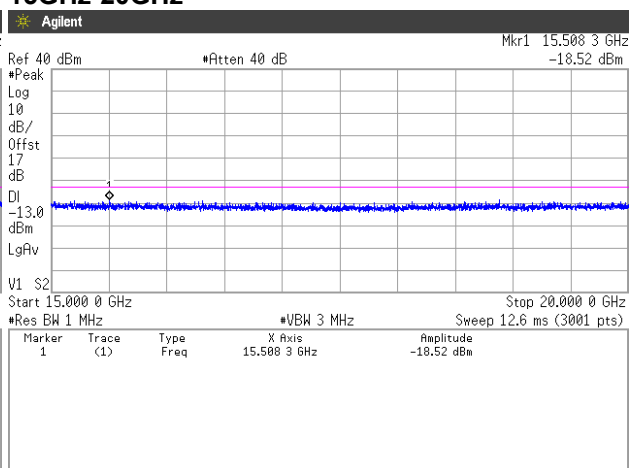Channel: 1513**30MHz-5GHz****5GHz-10GHz****10GHz-15GHz****15GHz-20GHz**


[LTE Band IV]
(Band Edge)
QPSK, BW 1.4MHz, RB1-0
Channel: Low

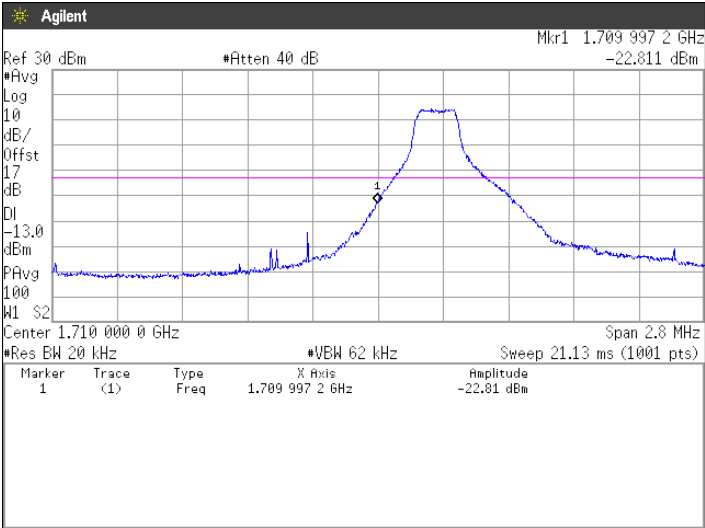


QPSK, BW 1.4MHz, RB1-5
Channel: High

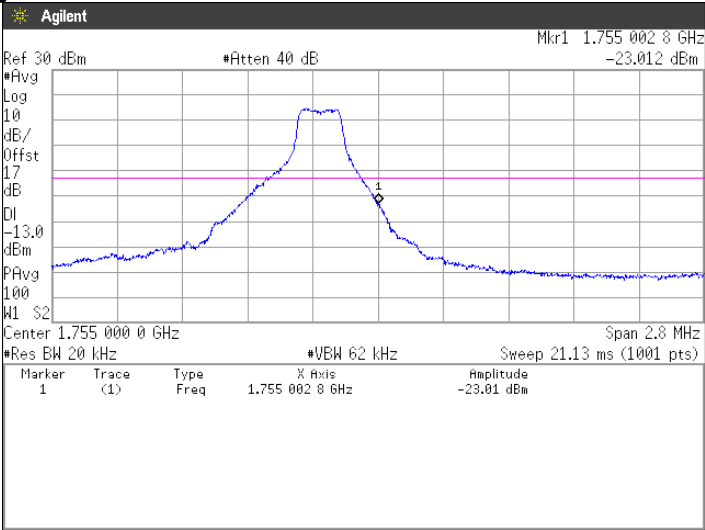


QPSK, BW 1.4MHz, RB6-0
Channel: Low

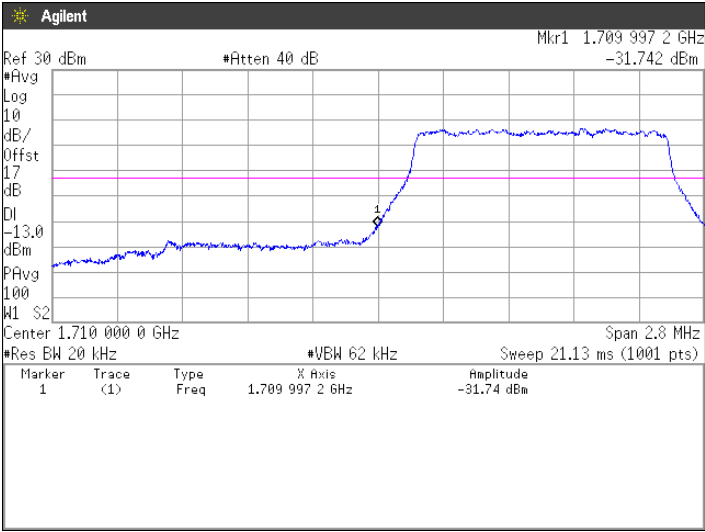


QPSK, BW 1.4MHz, RB6-0
Channel: High

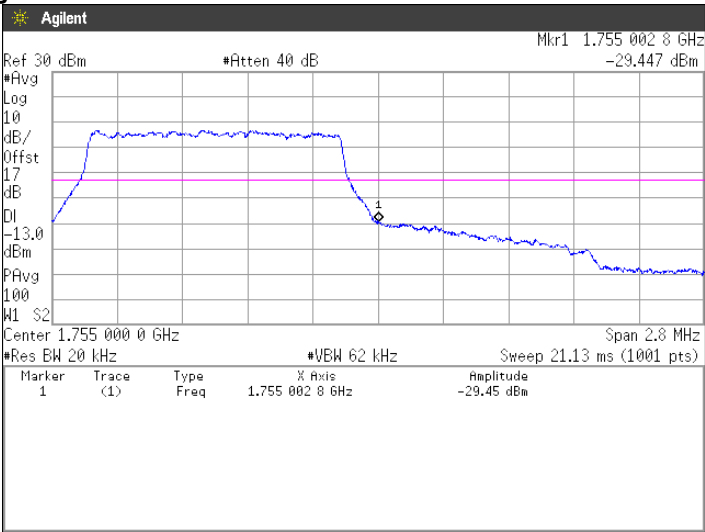


QPSK, BW 3MHz, RB1-0
Channel: Low

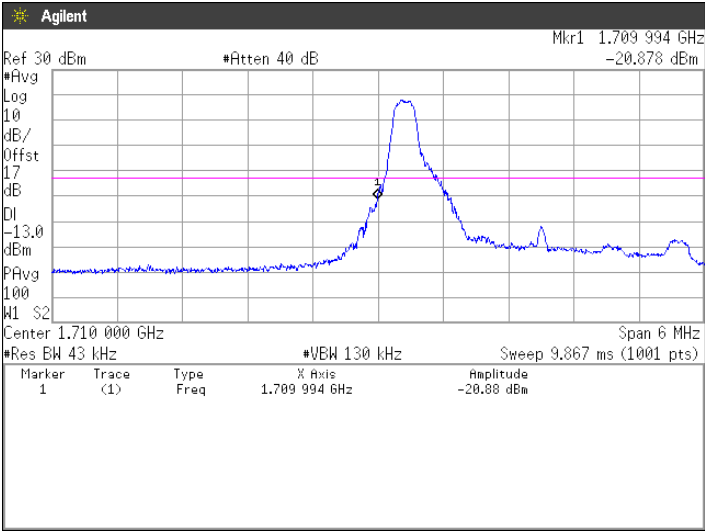


QPSK, BW 3MHz, RB1-14
Channel: High

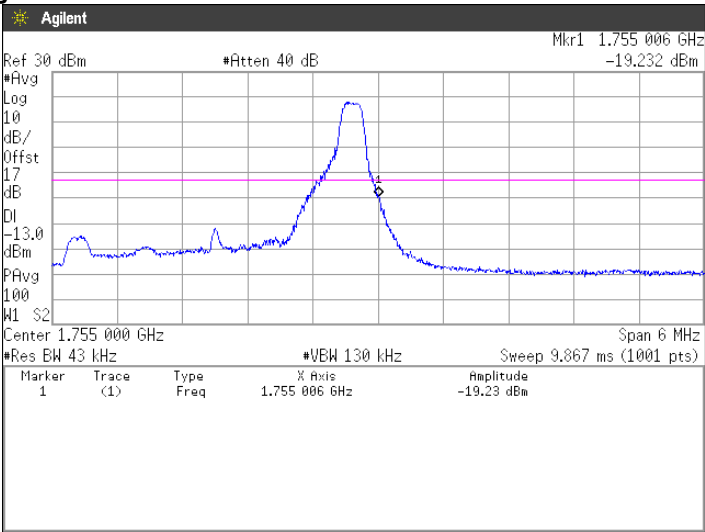


QPSK, BW 3MHz, RB15-0
Channel: Low

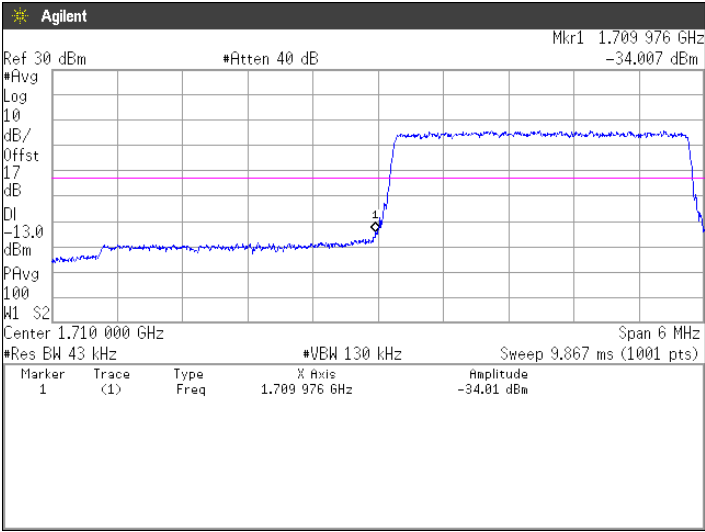


QPSK, BW 3MHz, RB15-0
Channel: High

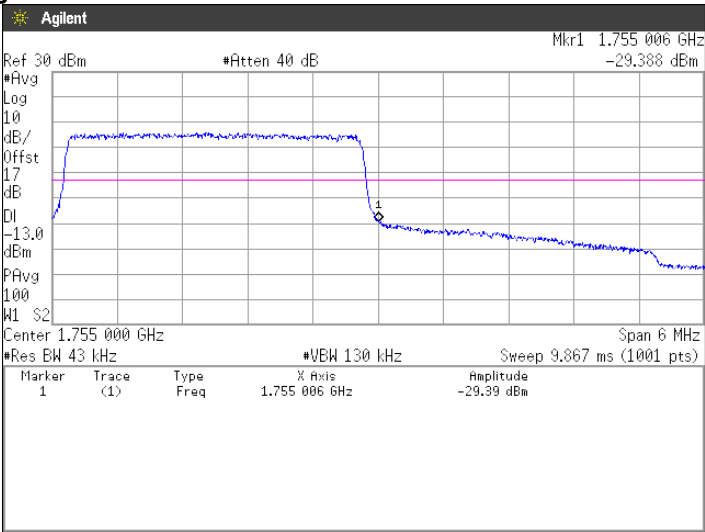


QPSK, BW 5MHz, RB1-0
Channel: Low

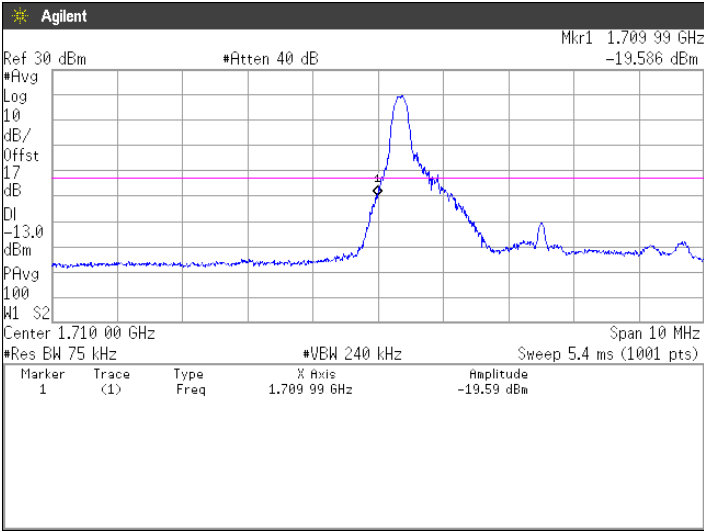


QPSK, BW 5MHz, RB1-24
Channel: High

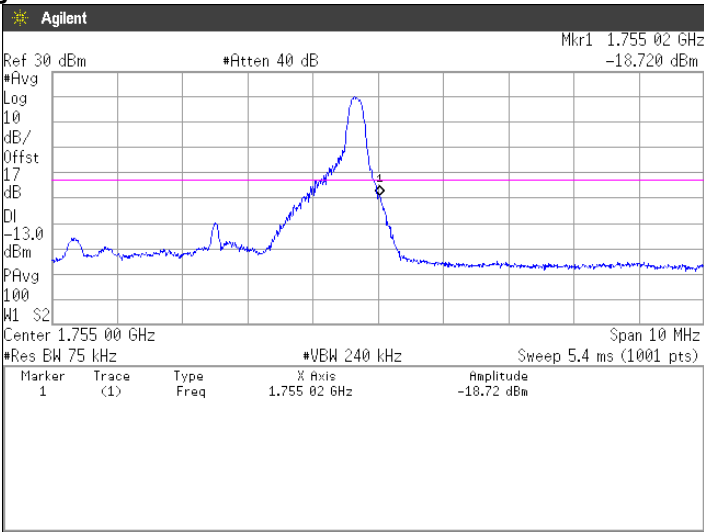


QPSK, BW 5MHz, RB25-0
Channel: Low

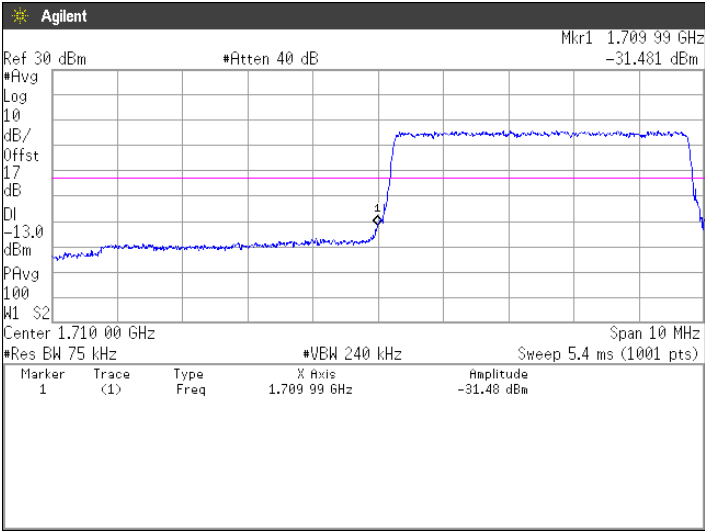


QPSK, BW 5MHz, RB25-0
Channel: High

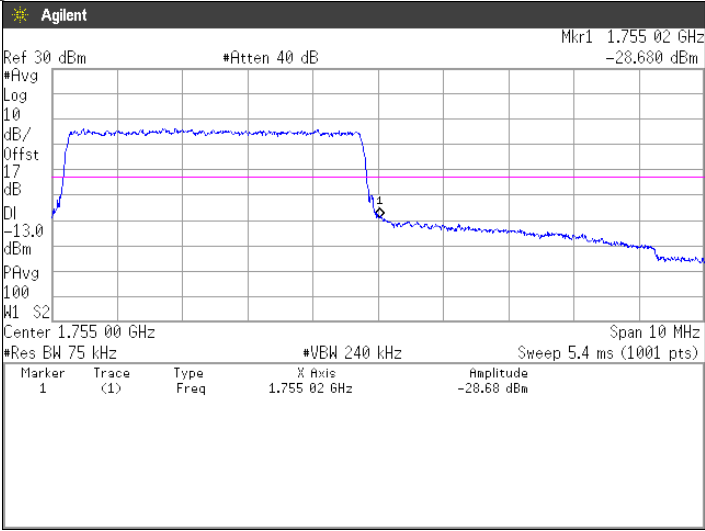


QPSK, BW 10MHz, RB1-0
Channel: Low

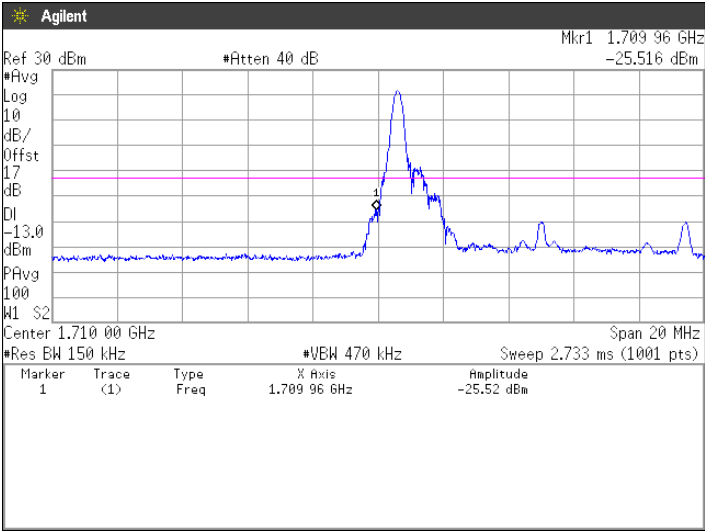


QPSK, BW 10MHz, RB1-49
Channel: High

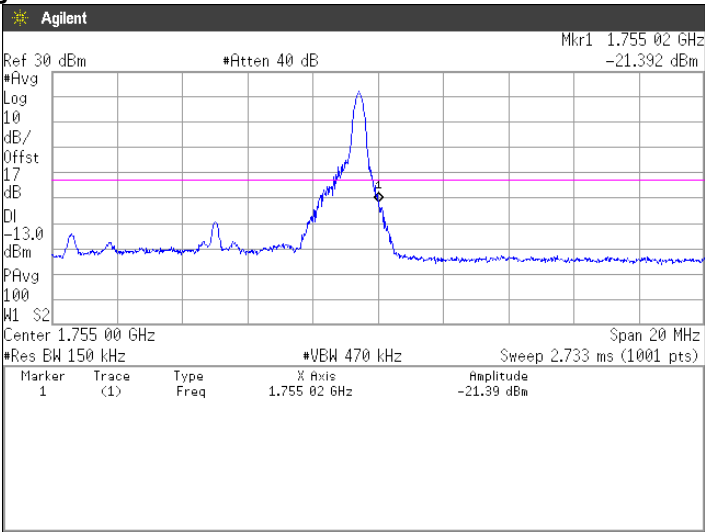


QPSK, BW 10MHz, RB50-0
Channel: Low

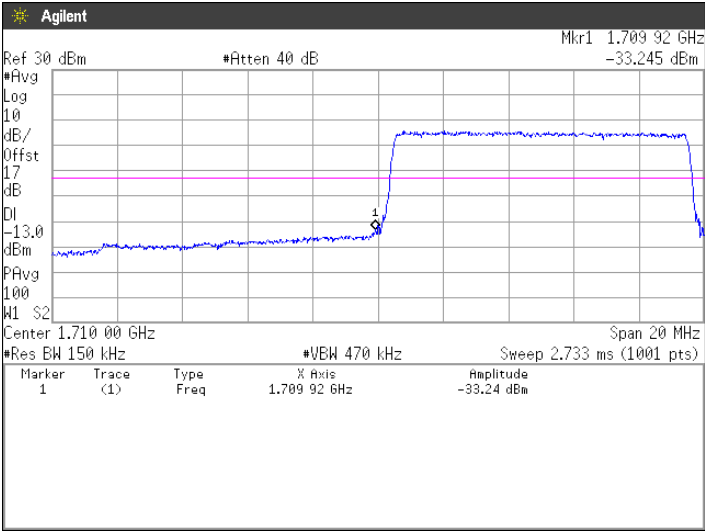


QPSK, BW 10MHz, RB50-0
Channel: High

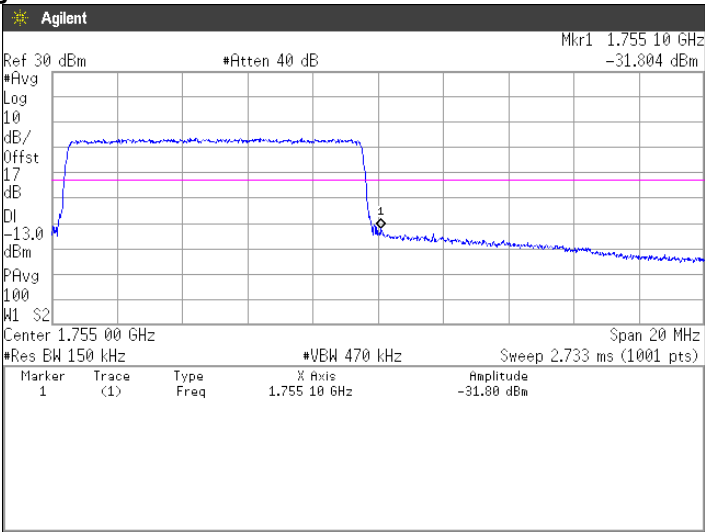


QPSK, BW 15MHz, RB1-0
Channel: Low

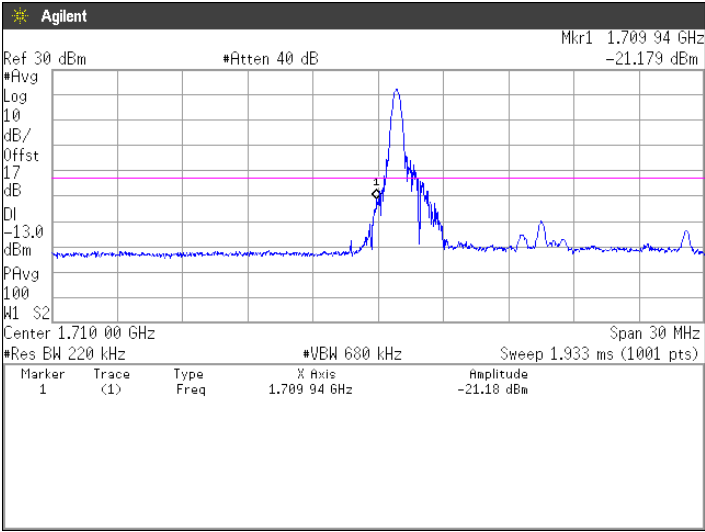


QPSK, BW 15MHz, RB1-74
Channel: High

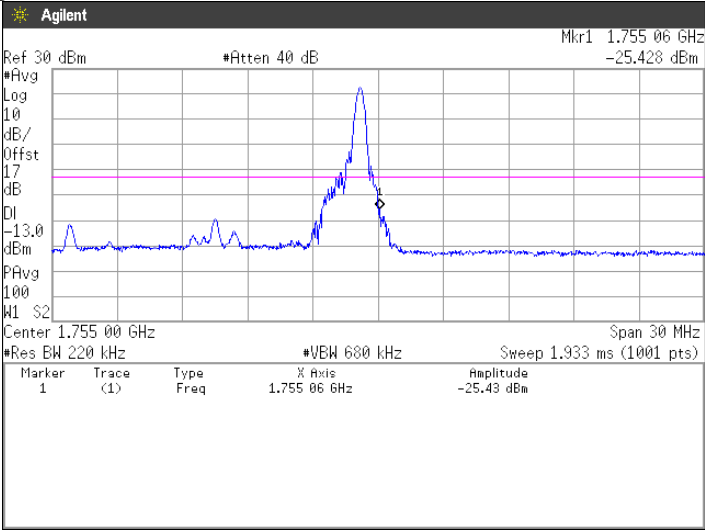


QPSK, BW 15MHz, RB75-0
Channel: Low

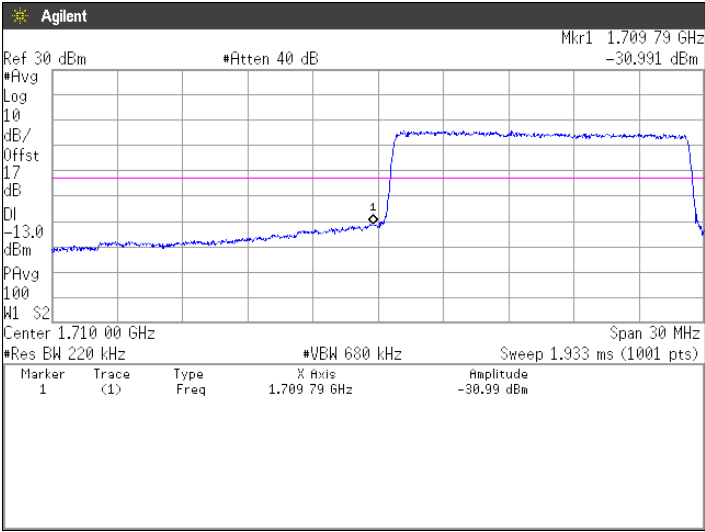


QPSK, BW 15MHz, RB75-0
Channel: High

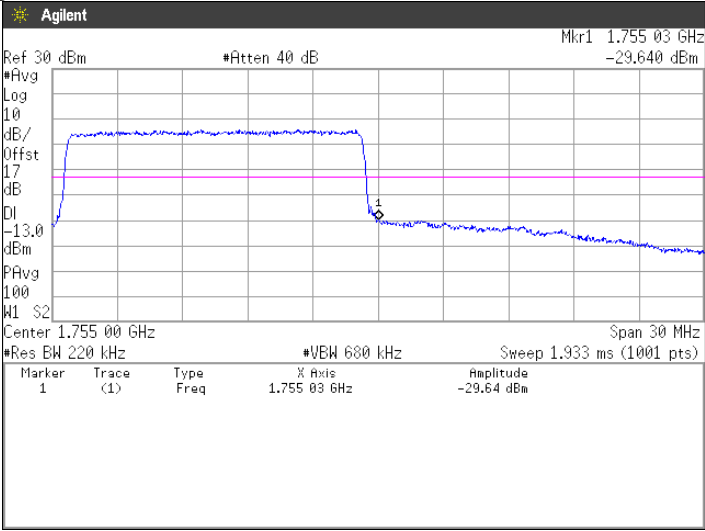

QPSK, BW 20MHz, RB1-0
Channel: Low

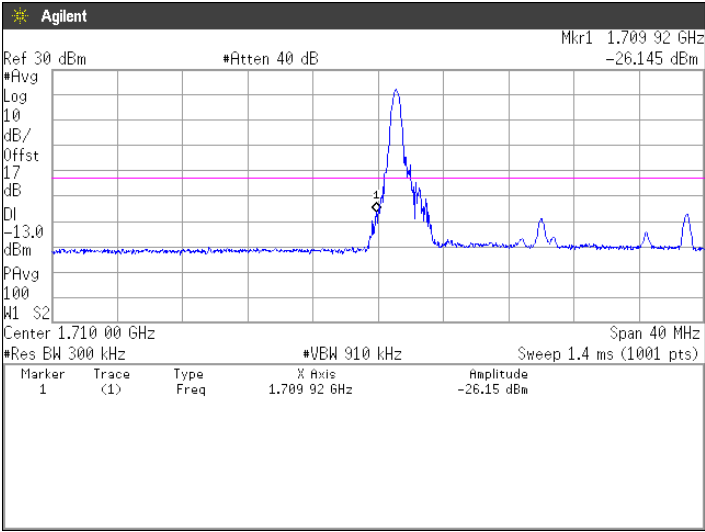


QPSK, BW 20MHz, RB1-99
Channel: High

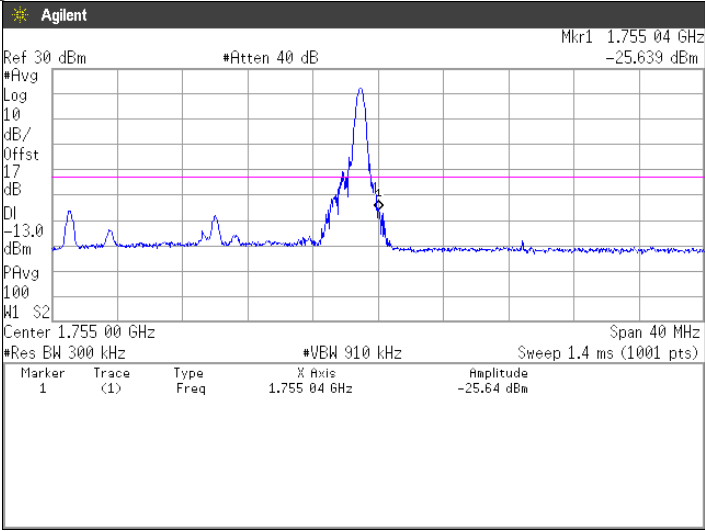




Japan


QPSK, BW 20MHz, RB100-0
Channel: Low

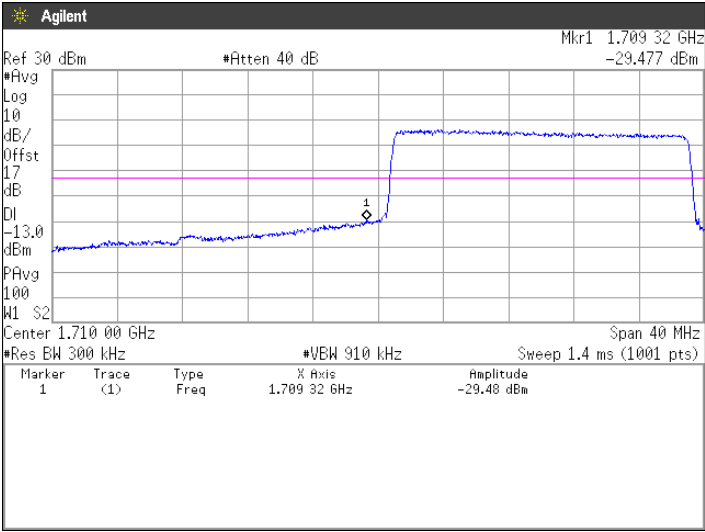


QPSK, BW 20MHz, RB100-0
Channel: High

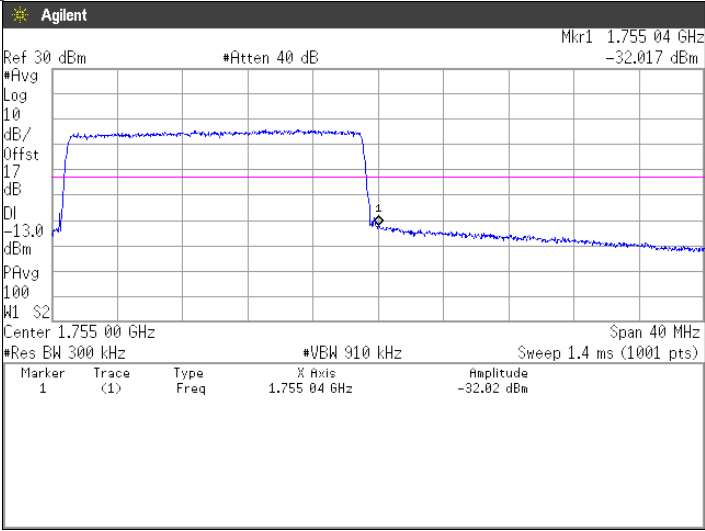


16QAM, BW 1.4MHz, RB1-0
Channel: Low

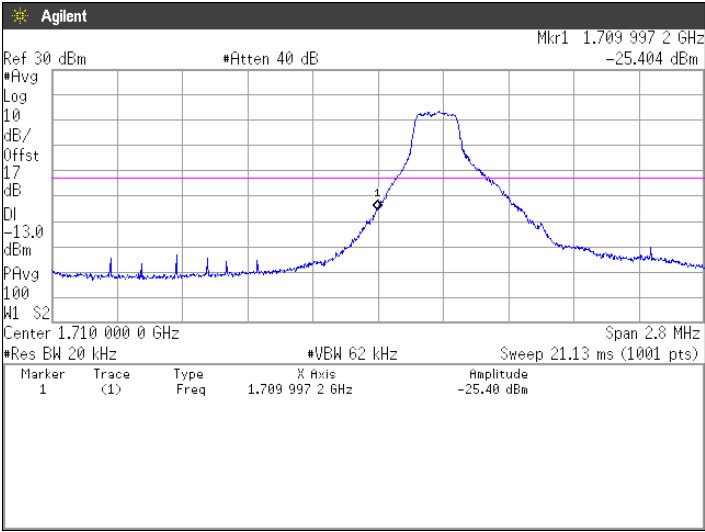


16QAM, BW 1.4MHz, RB1-5
Channel: High

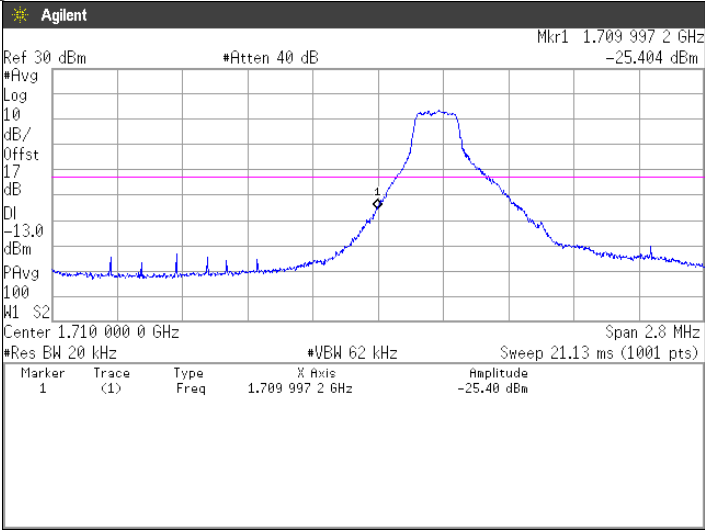


16QAM, BW 1.4MHz, RB6-0
Channel: Low

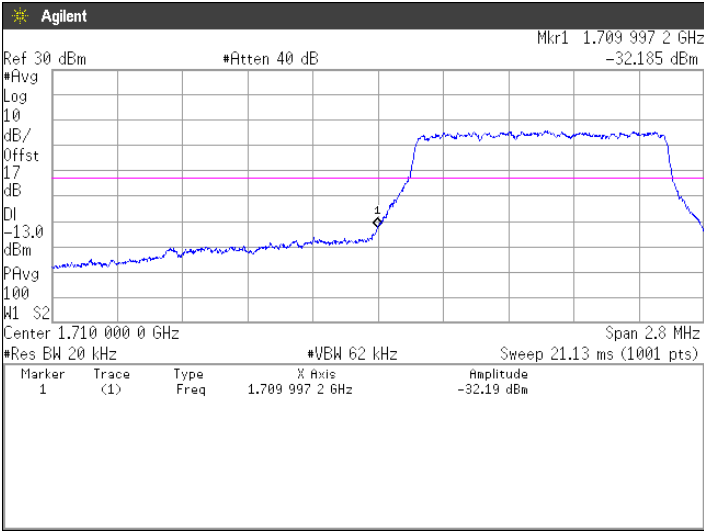


16QAM, BW 1.4MHz, RB6-0
Channel: High

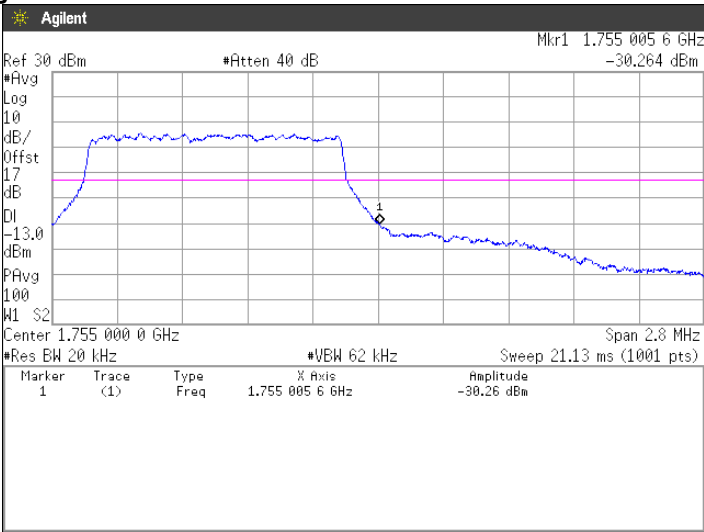


16QAM, BW 3MHz, RB1-0
Channel: Low

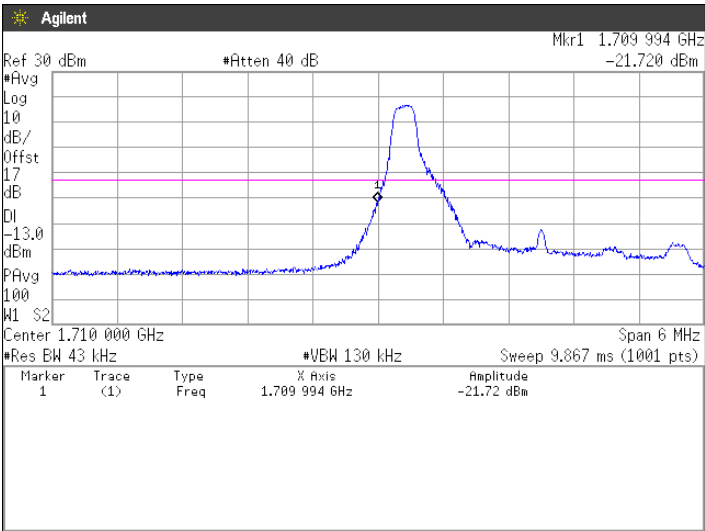


16QAM, BW 3MHz, RB1-14
Channel: High

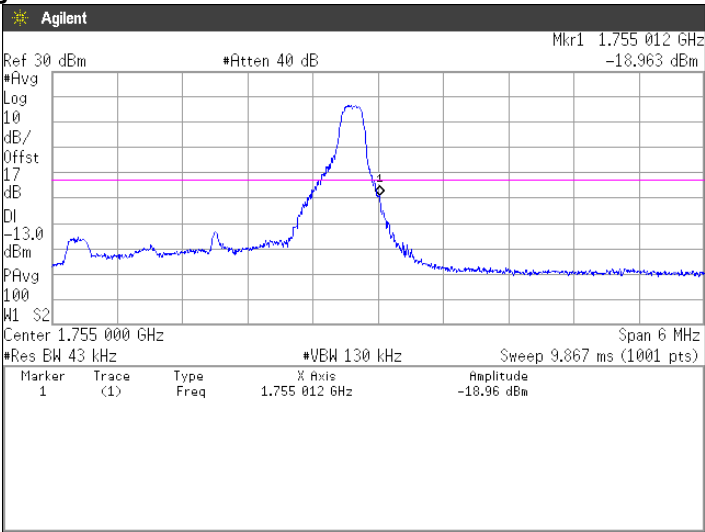


16QAM, BW 3MHz, RB15-0
Channel: Low

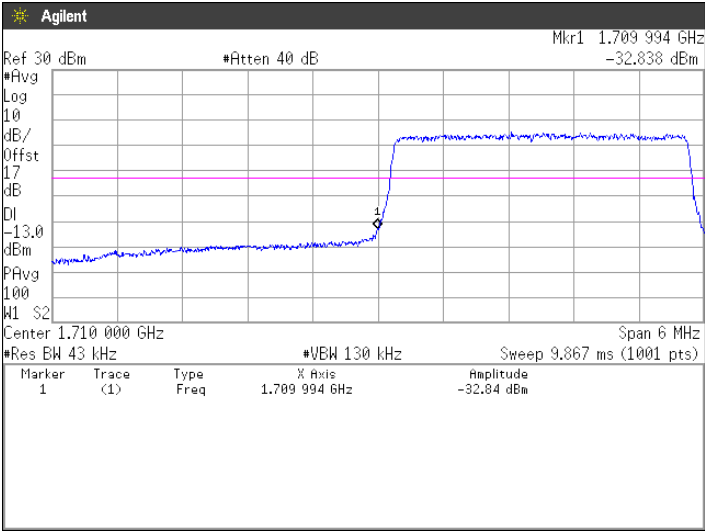


16QAM, BW 3MHz, RB15-0
Channel: High

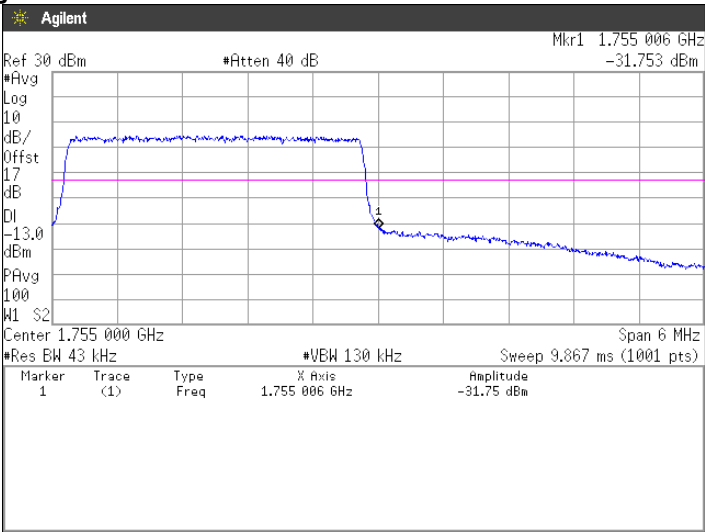


16QAM, BW 5MHz, RB1-0
Channel: Low

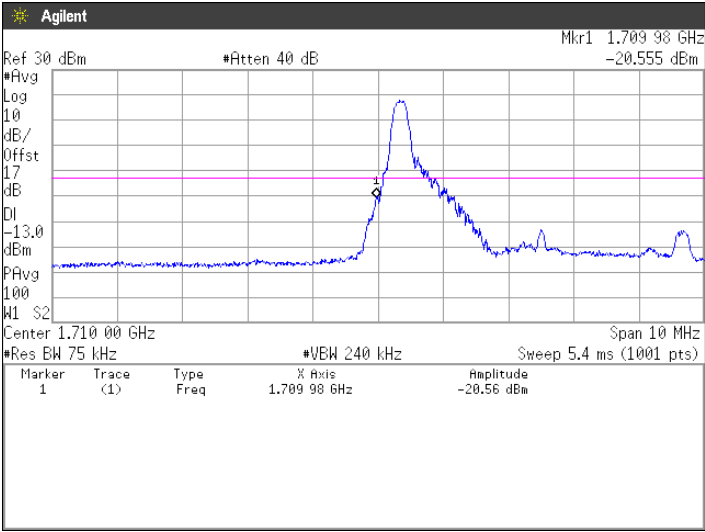


16QAM, BW 5MHz, RB1-24
Channel: High

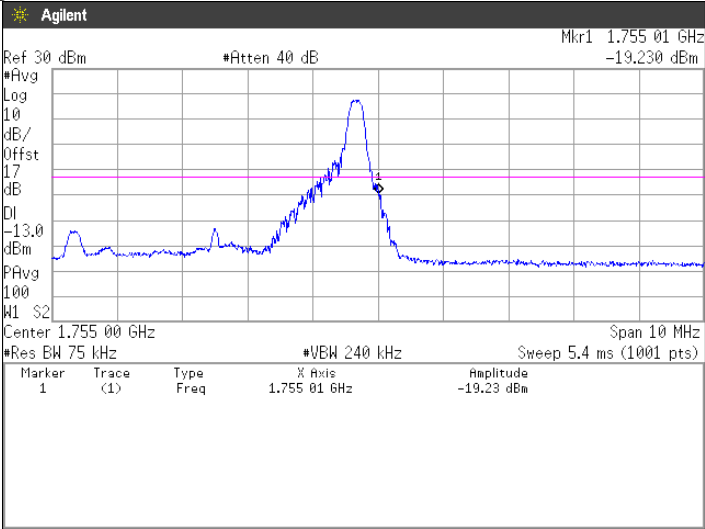


16QAM, BW 5MHz, RB25-0
Channel: Low

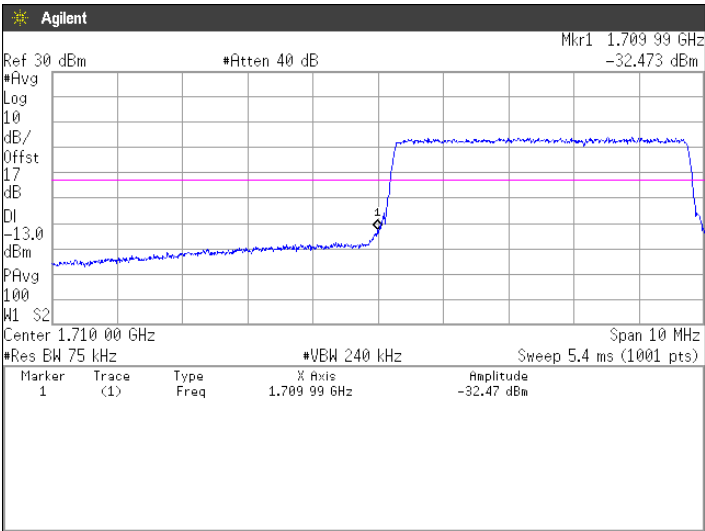


16QAM, BW 5MHz, RB25-0
Channel: High

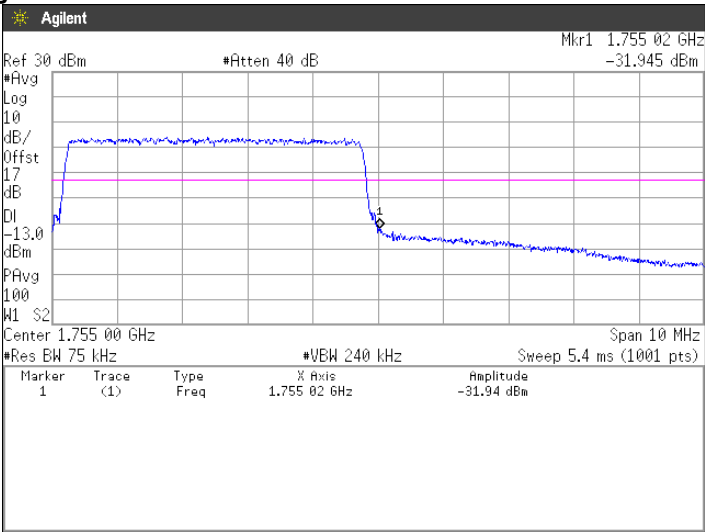


16QAM, BW 10MHz, RB1-0
Channel: Low

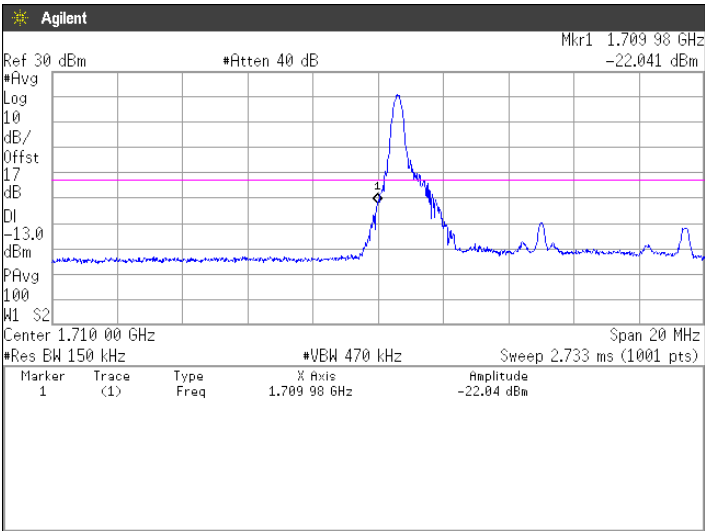


16QAM, BW 10MHz, RB1-49
Channel: High

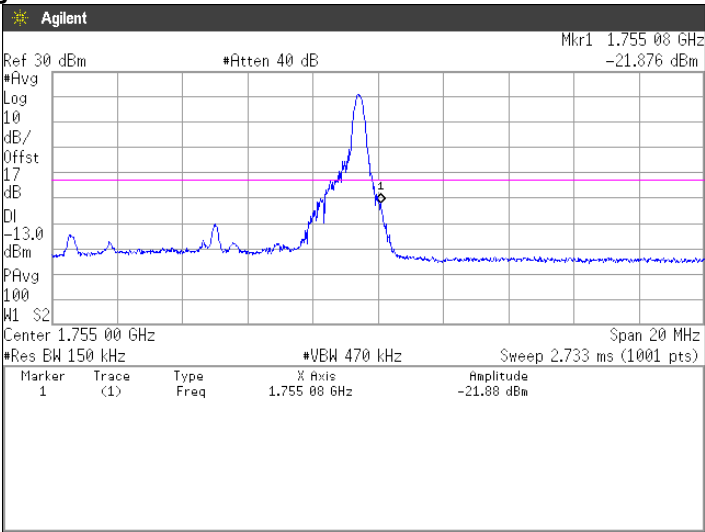


16QAM, BW 10MHz, RB50-0
Channel: Low

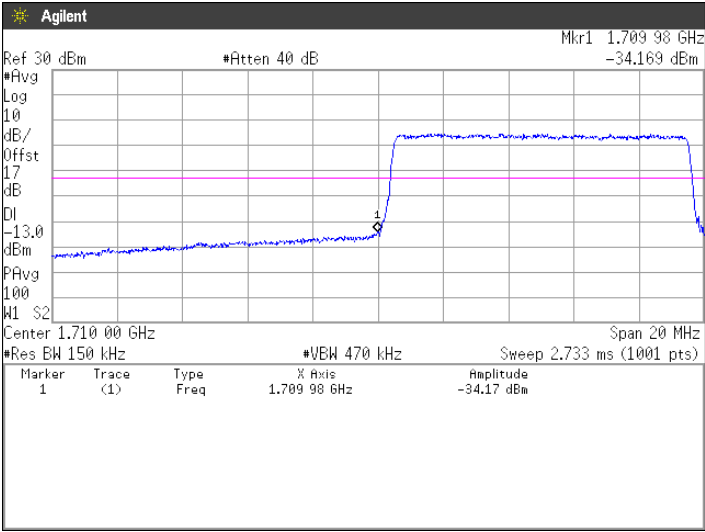


16QAM, BW 10MHz, RB50-0
Channel: High

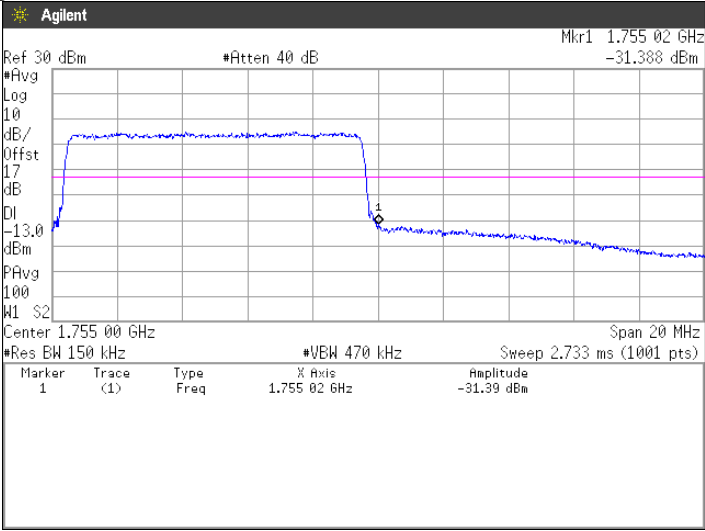


16QAM, BW 15MHz, RB1-0
Channel: Low

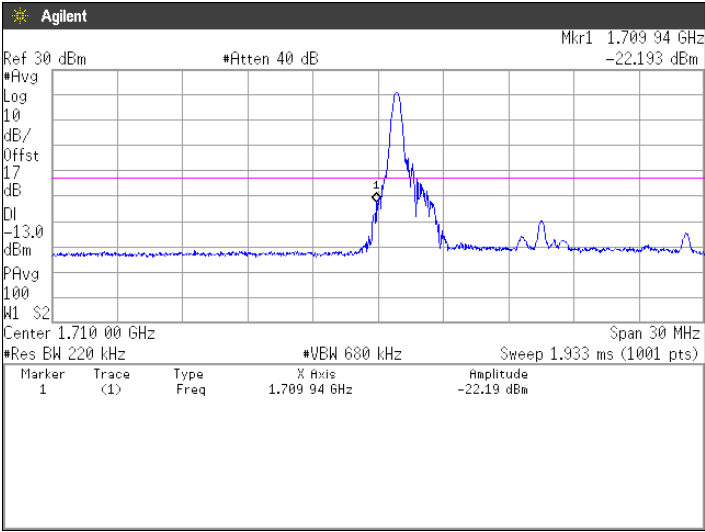


16QAM, BW 15MHz, RB1-74
Channel: High

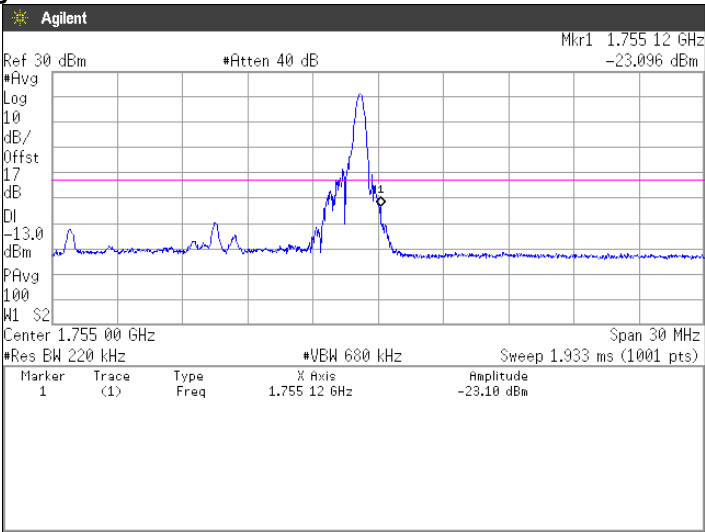


16QAM, BW 15MHz, RB75-0
Channel: Low

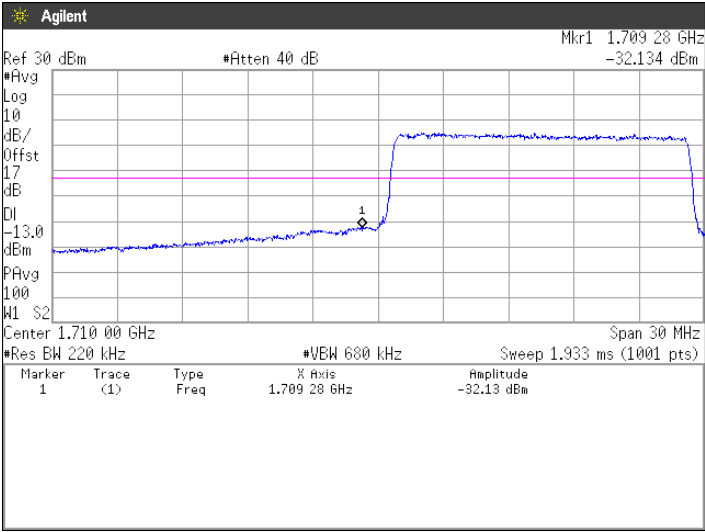


16QAM, BW 15MHz, RB75-0
Channel: High

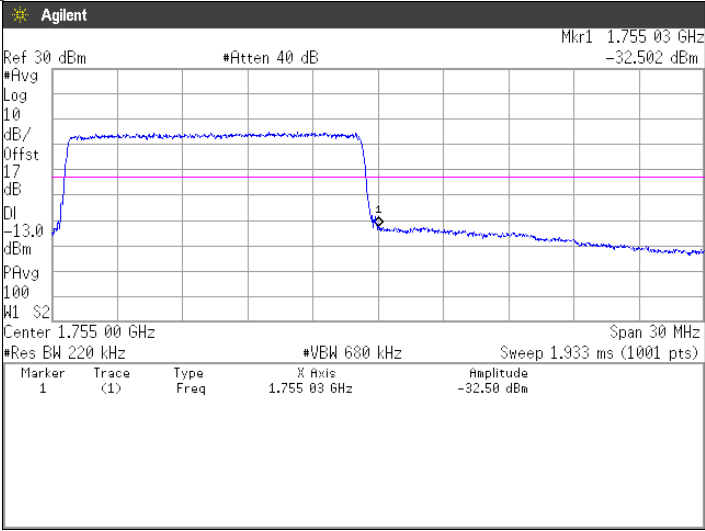


16QAM, BW 20MHz, RB1-0
Channel: Low

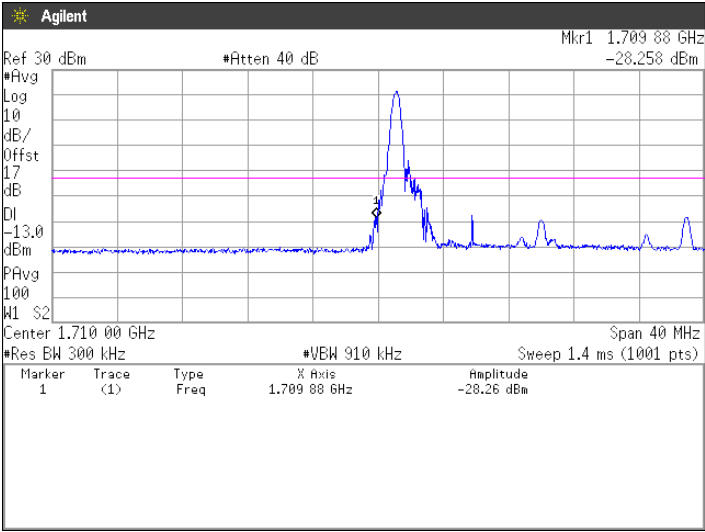


16QAM, BW 20MHz, RB1-99
Channel: High

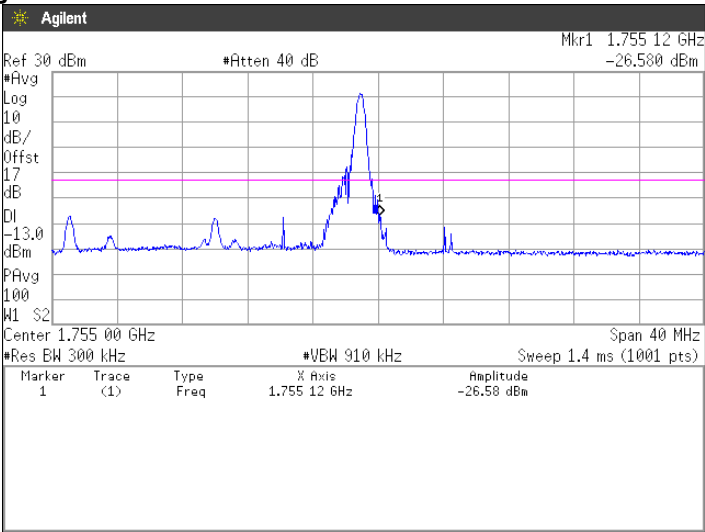


16QAM, BW 20MHz, RB100-0
Channel: Low

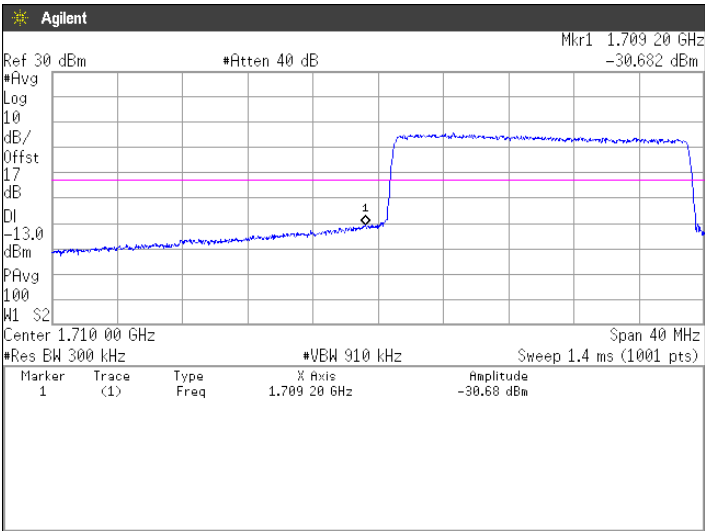


16QAM, BW 20MHz, RB100-0
Channel: High

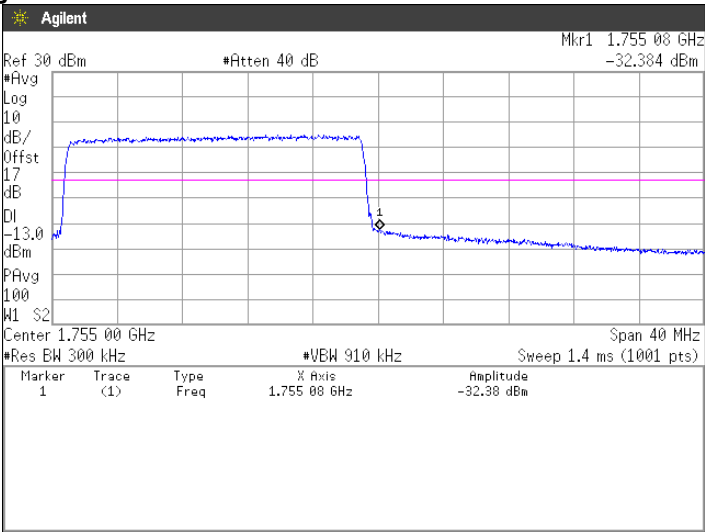


64QAM, BW 1.4MHz, RB1-0
Channel: Low

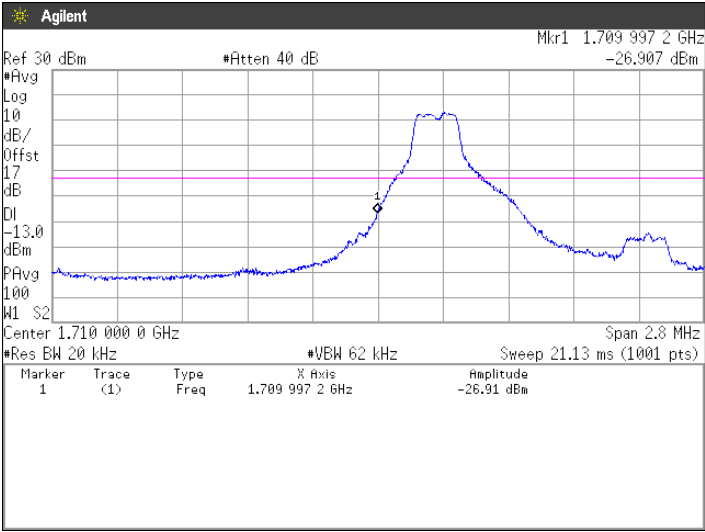


64QAM, BW 1.4MHz, RB1-5
Channel: High

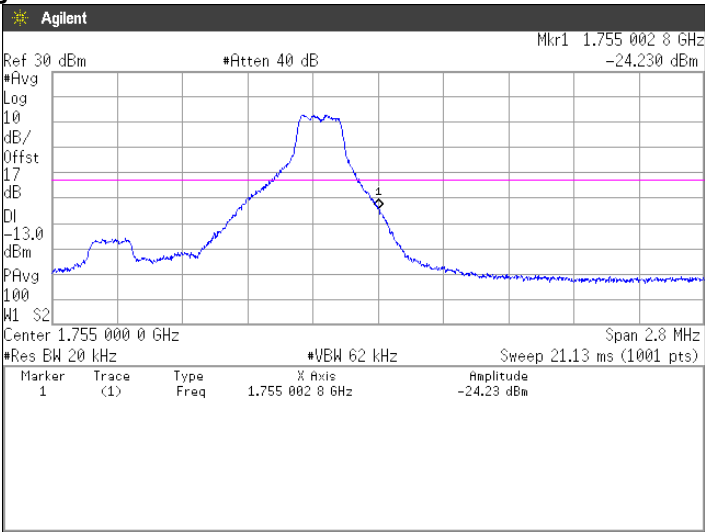


64QAM, BW 1.4MHz, RB6-0
Channel: Low

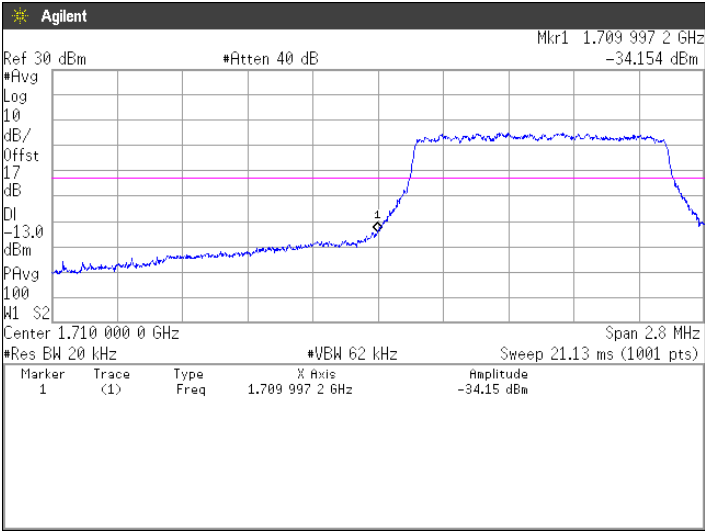


64QAM, BW 1.4MHz, RB6-0
Channel: High

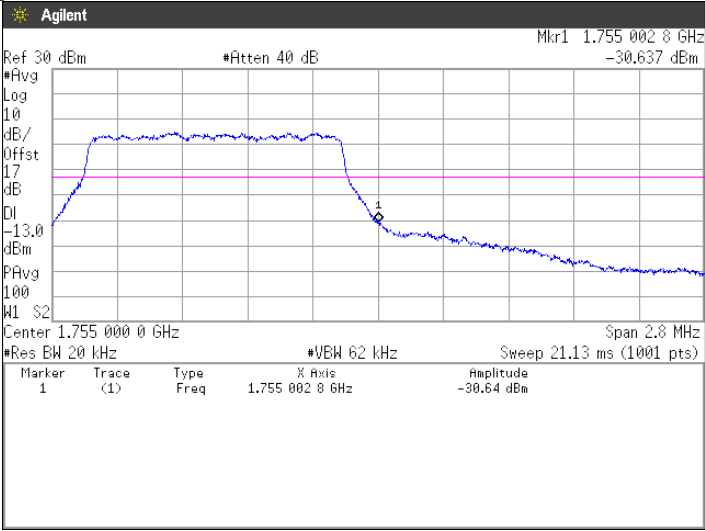


64QAM, BW 3MHz, RB1-0
Channel: Low

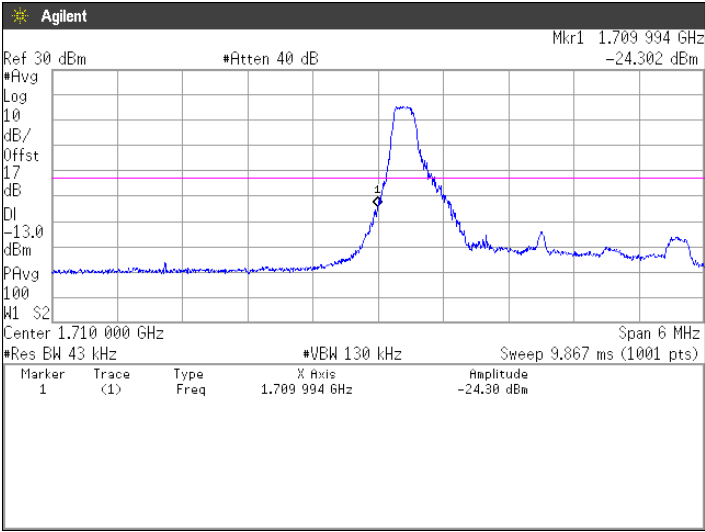


64QAM, BW 3MHz, RB1-14
Channel: High

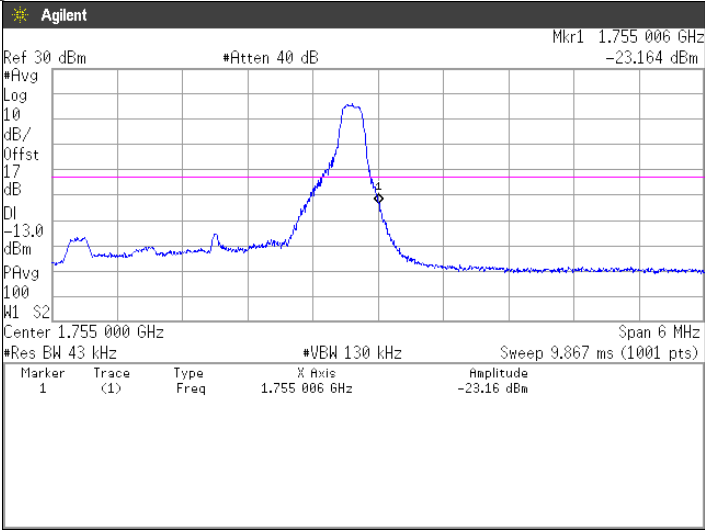


64QAM, BW 3MHz, RB15-0
Channel: Low

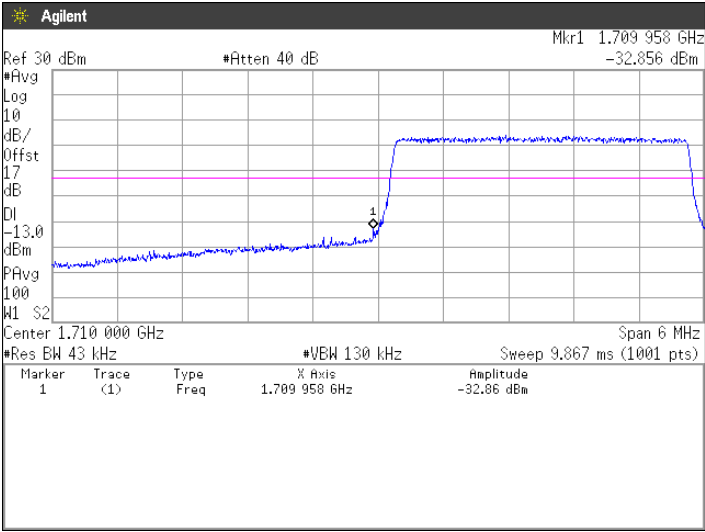


64QAM, BW 3MHz, RB15-0
Channel: High

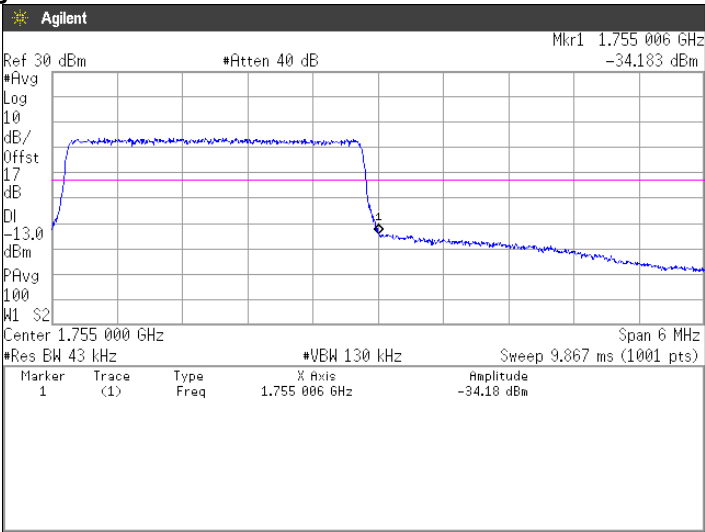


64QAM, BW 5MHz, RB1-0
Channel: Low

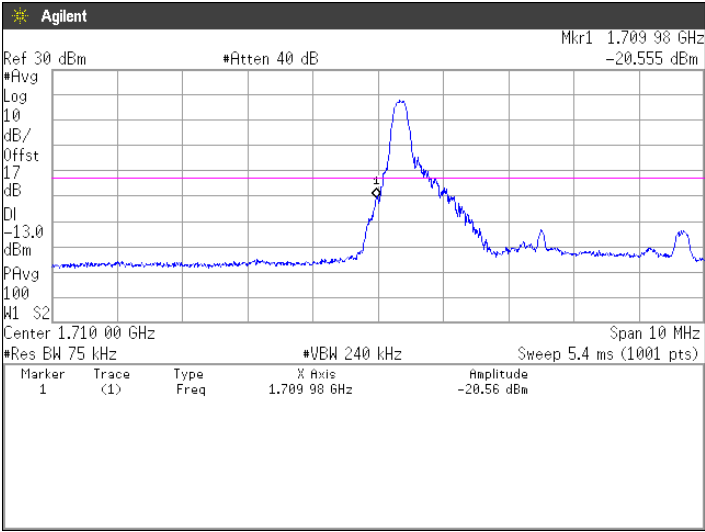


64QAM, BW 5MHz, RB1-24
Channel: High

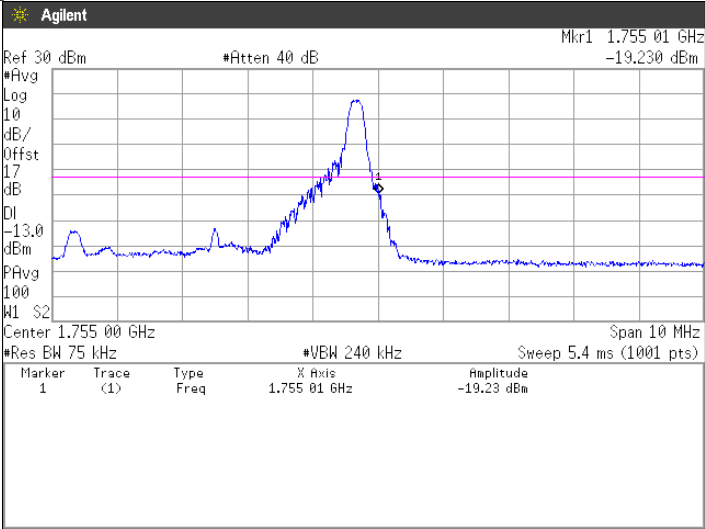


64QAM, BW 5MHz, RB25-0
Channel: Low

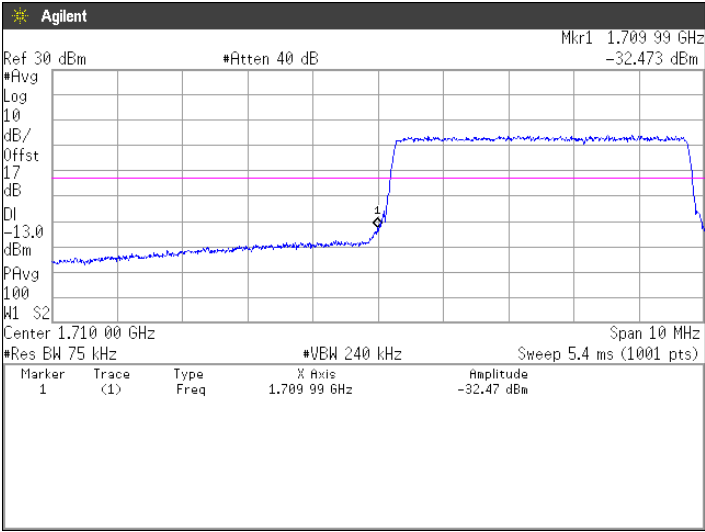


64QAM, BW 5MHz, RB25-0
Channel: High

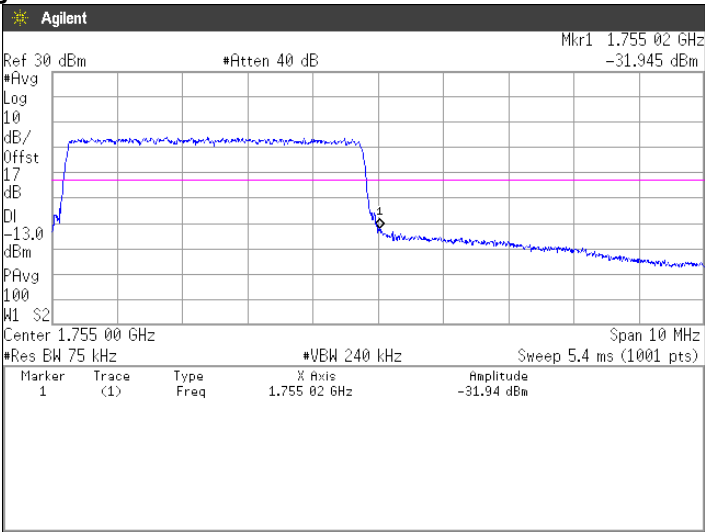


64QAM, BW 10MHz, RB1-0
Channel: Low

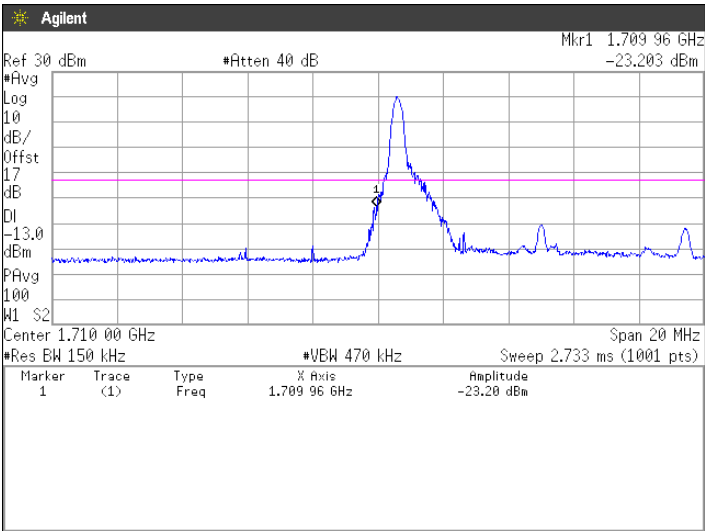


64QAM, BW 10MHz, RB1-49
Channel: High

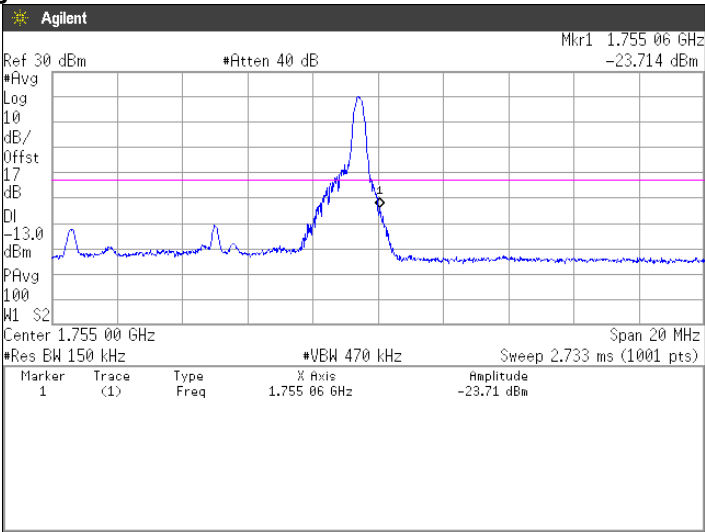


64QAM, BW 10MHz, RB50-0
Channel: Low

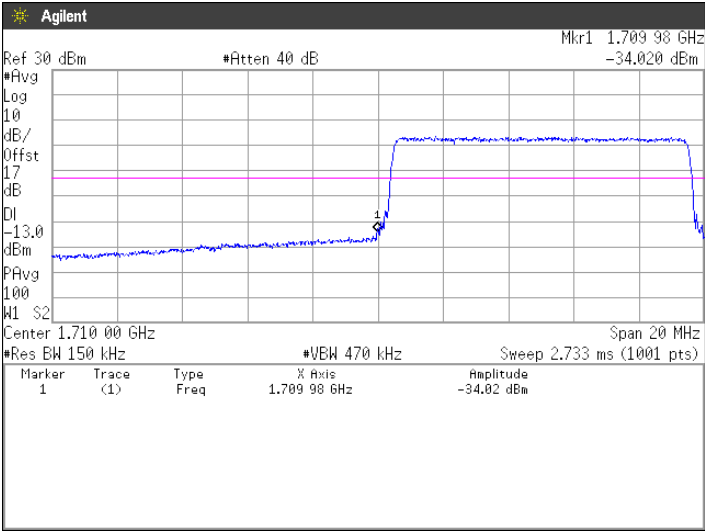


64QAM, BW 10MHz, RB50-0
Channel: High

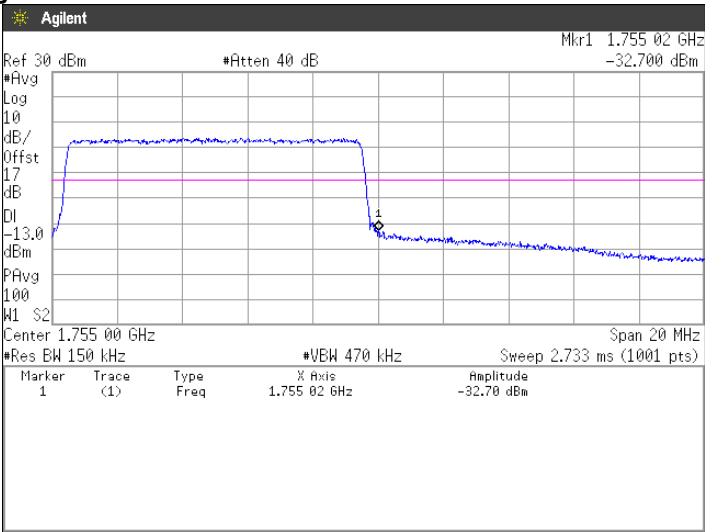


64QAM, BW 15MHz, RB1-0
Channel: Low

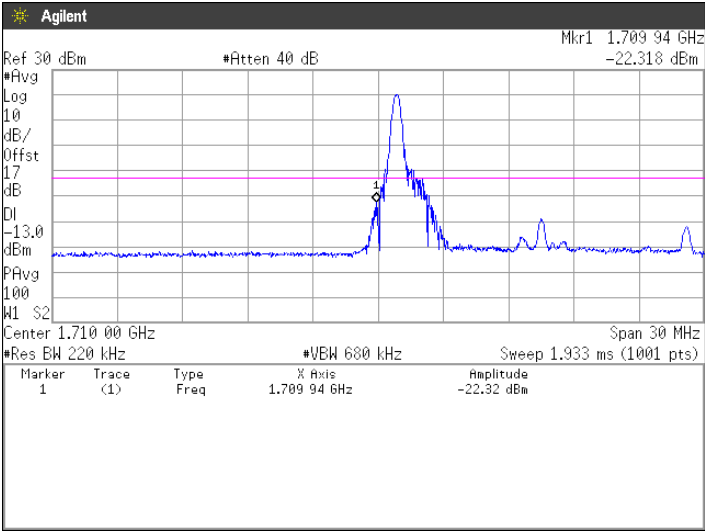


64QAM, BW 15MHz, RB1-74
Channel: High

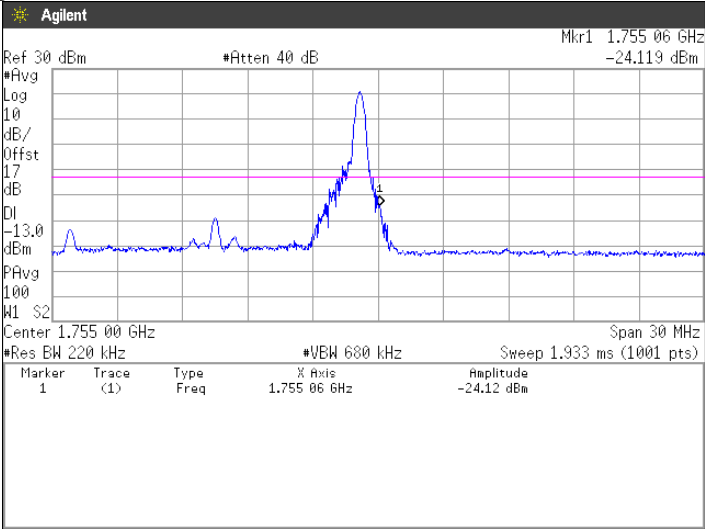


64QAM, BW 15MHz, RB75-0
Channel: Low

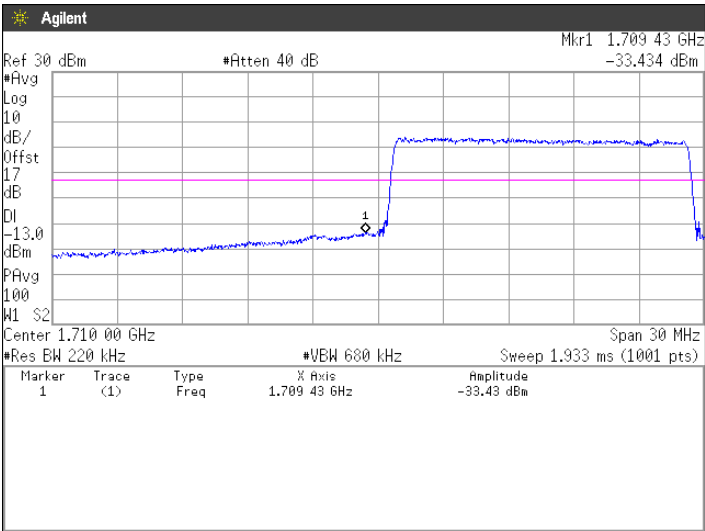


64QAM, BW 15MHz, RB75-0
Channel: High

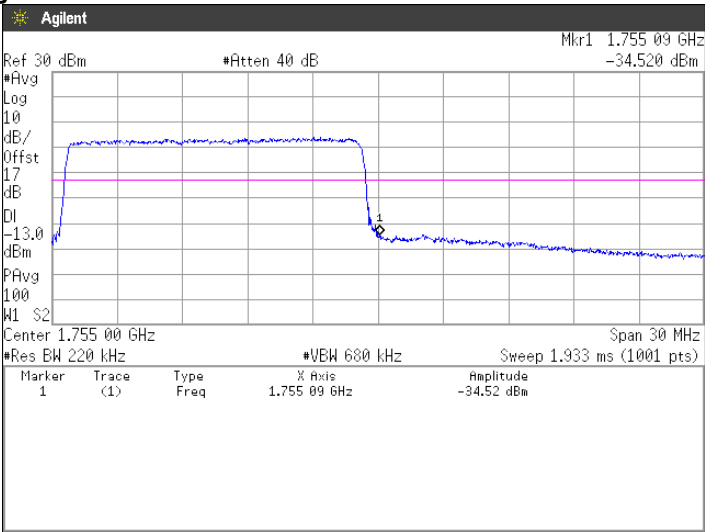


64QAM, BW 20MHz, RB1-0
Channel: Low

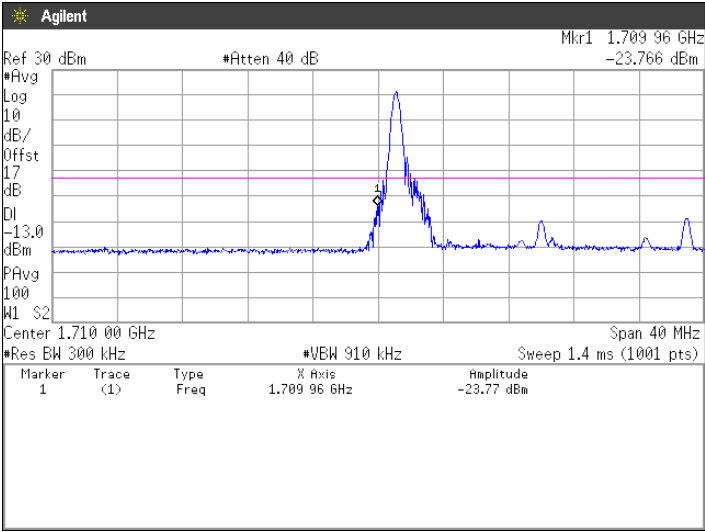


64QAM, BW 20MHz, RB1-99
Channel: High

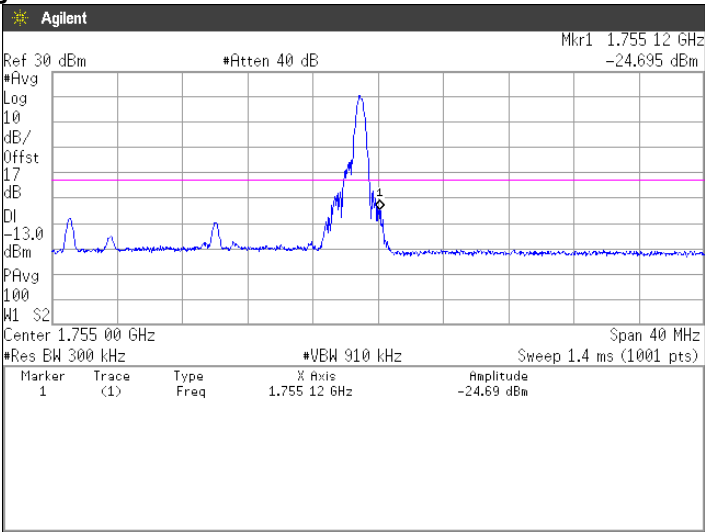

64QAM, BW 20MHz, RB100-0
Channel: Low




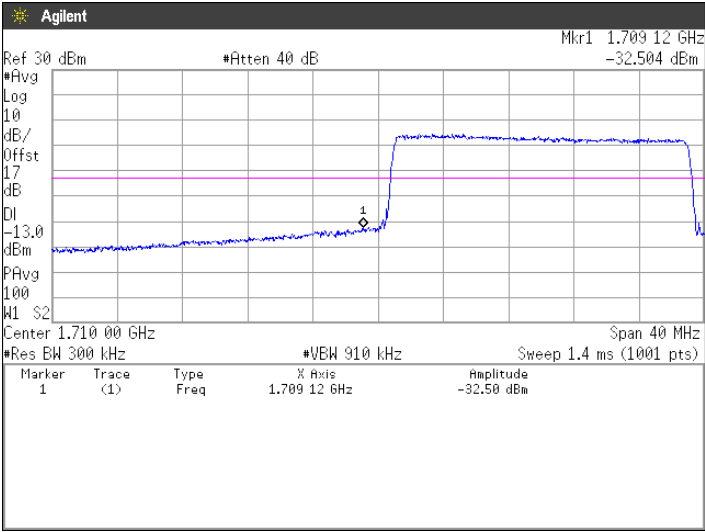


64QAM, BW 20MHz, RB100-0
Channel: High

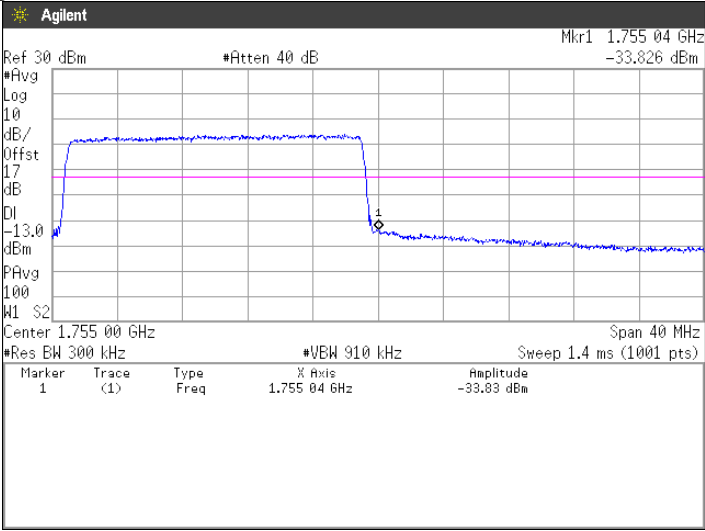


(Spurious Emissions)

Note: Conducted spurious test was measured in the worst case of conducted output power.

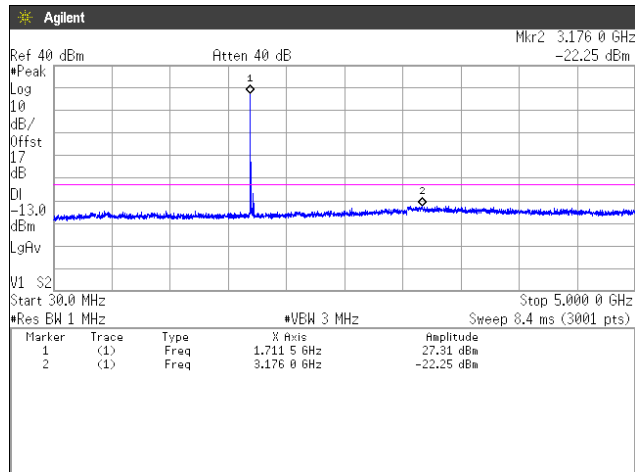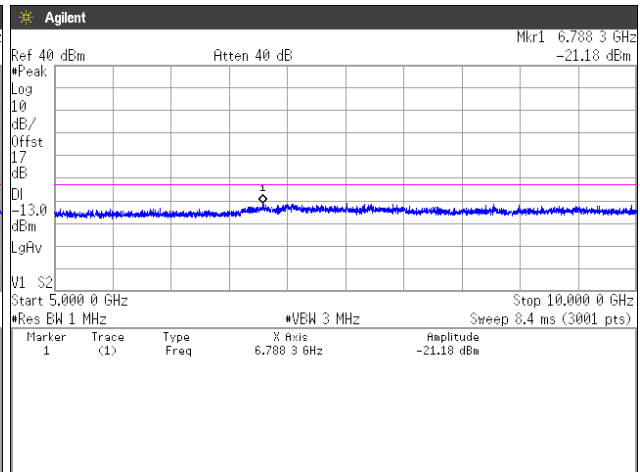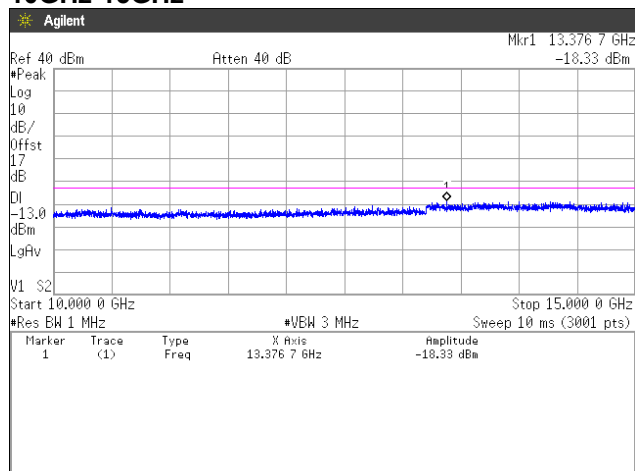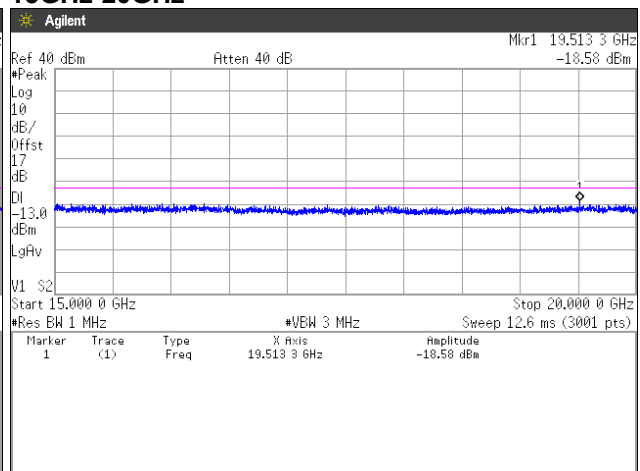
QPSK, BW 15MHz**Channel: 20025****30MHz-5GHz****5GHz-10GHz****10GHz-15GHz****15GHz-20GHz**

Channel: 20175


30MHz-5GHz

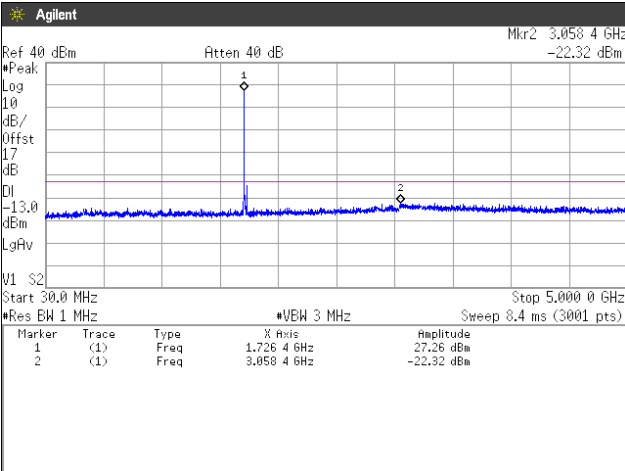


5GHz-10GHz




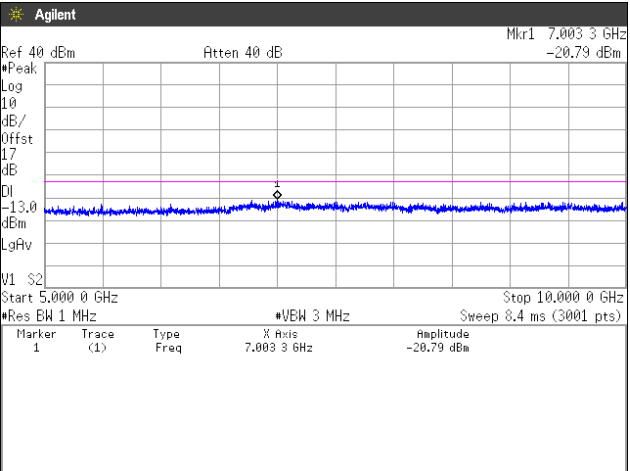


10GHz-15GHz

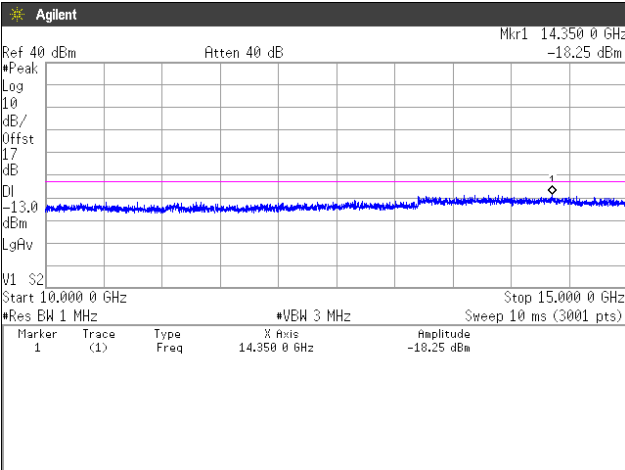

15GHz-20GHz

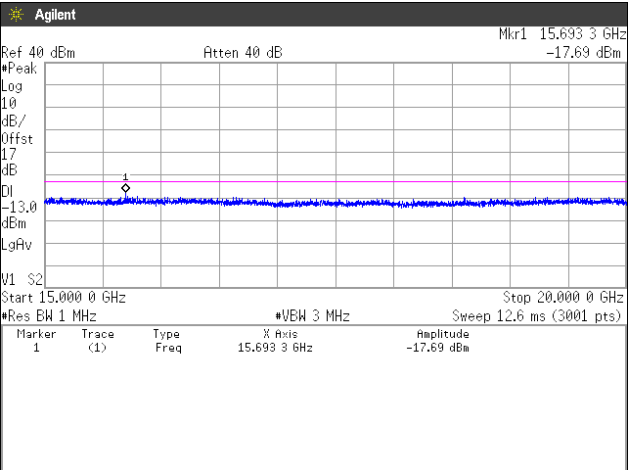

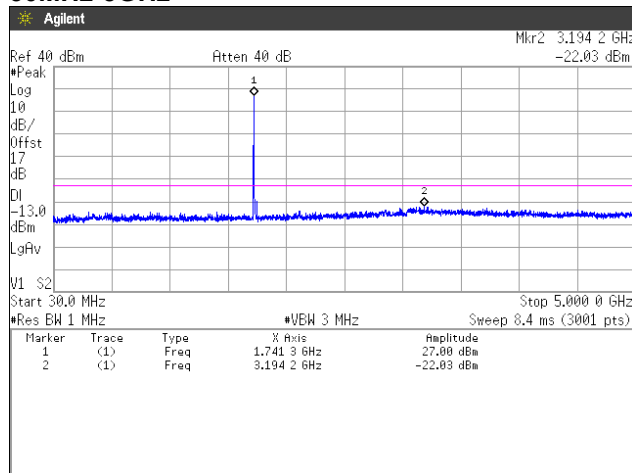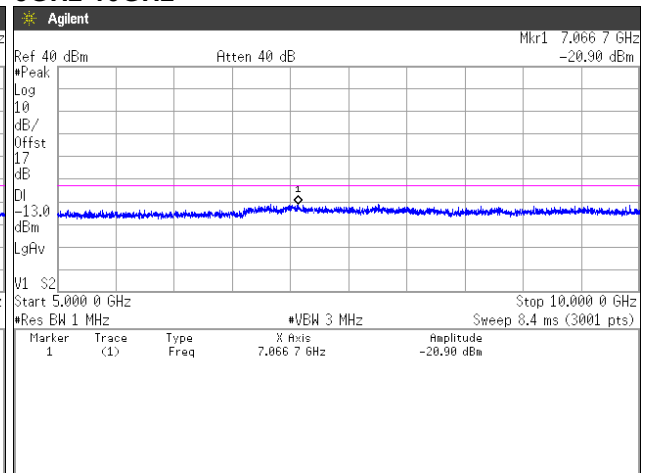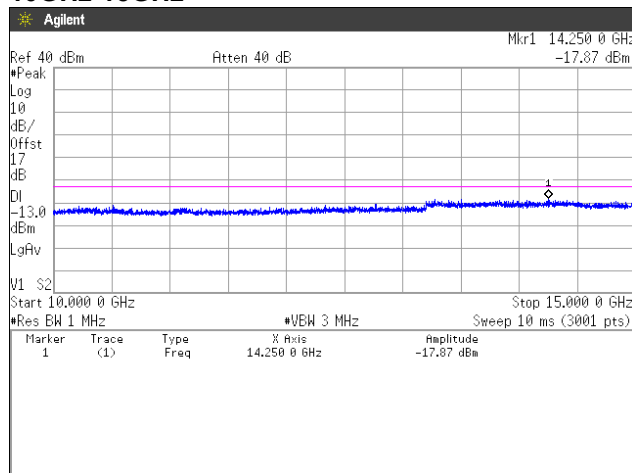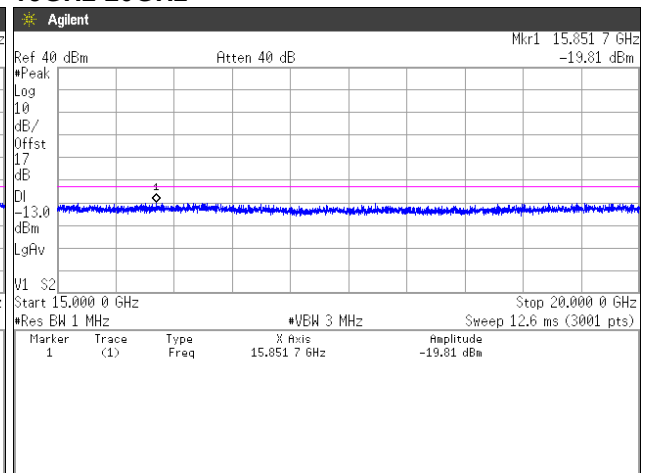Channel: 20325**30MHz-5GHz****5GHz-10GHz****10GHz-15GHz****15GHz-20GHz**

4.5 Radiated Emissions and Harmonic Emissions

4.5.1 Measurement procedure

[FCC 27.53, 2.1053]

<Step 1>

The EUT and support equipment are placed on a 1 meter x 1 meter surface, 0.8 meter height styrene foam table. Radiated emission measurements are performed at 3 meter distance with the broadband antenna (Biconical antenna, Log periodic antenna and double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission.

The bandwidth of the spectrum analyzer is set to 1 MHz. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission. The frequency is investigated up to 20GHz.

<Step 2>

The substitution antenna is replaced by the transmitter antenna (EUT).


The frequency of the signal generator is adjusted to the measurement frequency.

Level of the signal generator is adjusted to the level that is obtained from step 1, and record the emission level of signal generator.

The spectrum analyzer is set to;

- a) RBW = 100 kHz for below 1GHz and 1MHz for above 1GHz / VBW $\geq 3 \times$ RBW
- b) Detector = Peak
- c) Trace mode = Max hold
- d) Sweep time = auto-couple

- Test configuration

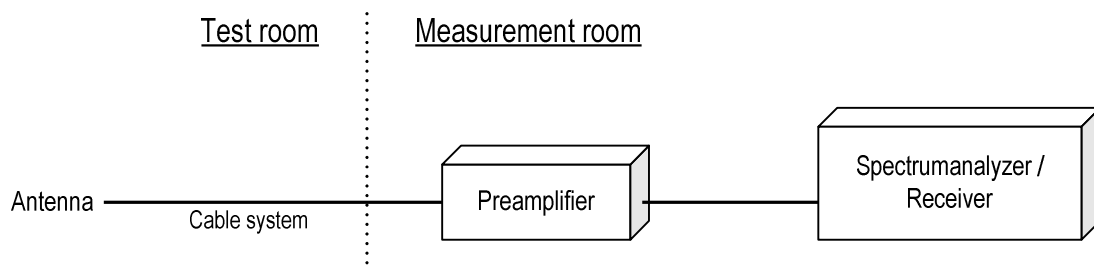



Japan

4.5.2 Calculation method

Result (EIRP) = Ant. Input - Cable loss + Antenna Gain

Margin = Limit – Result (EIRP)

Example:

Limit @ 3465.0 MHz : -13.0 dBm

Ant. Input = -50.7 dBm Cable loss = 1.6 dB Ant. Gain = 9.1 dBi

Result = -50.7 - 1.6 + 9.1 = -43.2 dBm

Margin = -13.0 - (-43.2) = 30.2 dB

4.5.3 Limit

-13 dBm or less

4.5.4 Test data

Date	: 8-August-2020	Test engineer	:	Chiaki Kanno
Temperature	: 21.8 [°C]			
Humidity	: 53.9 [%]			
Test place	: 3m Semi-anechoic chamber			
Date	: 11~12-August-2020	Test engineer	:	Chiaki Kanno
Temperature	: 21.2 [°C]			
Humidity	: 63.1 [%]			
Test place	: 3m Semi-anechoic chamber			
Date	: 17-August-2020	Test engineer	:	Chiaki Kanno
Temperature	: 22.9 [°C]			
Humidity	: 64.3 [%]			
Test place	: 3m Semi-anechoic chamber			
Date	: 19-August-2020	Test engineer	:	Chiaki Kanno
Temperature	: 22.4 [°C]			
Humidity	: 56.8 [%]			
Test place	: 3m Semi-anechoic chamber			
Date	: 20-August-2020	Test engineer	:	Chiaki Kanno
Temperature	: 22.8 [°C]			
Humidity	: 59.6 [%]			
Test place	: 3m Semi-anechoic chamber			
Date	: 21-August-2020	Test engineer	:	Chiaki Kanno
Temperature	: 21.8 [°C]			
Humidity	: 57.3 [%]			
Test place	: 3m Semi-anechoic chamber			

[WCDMA Band IV]
Channel: 1312

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3424.8	-55.7	-55.7	1.5	8.0	-49.2	-13.0	36.2

Channel: 1413

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.2	-56.0	-56.5	1.6	8.2	-49.9	-13.0	36.9

Channel: 1513

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3505.2	-56.1	-56.8	1.6	8.4	-50.0	-13.0	37.0

**[LTE Band IV]
QPSK, BW 1.4MHz
Channel: 19957**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3421.4	-56.3	-56.8	1.5	8.0	-50.4	-13.0	37.4

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-56.4	-56.6	1.6	8.2	-50.0	-13.0	37.0

Channel: 20393

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3508.6	-56.3	-56.7	1.6	8.3	-49.9	-13.0	36.9

**16QAM, BW 1.4MHz
Channel: 19957**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3421.4	-56.5	-57.0	1.5	8.0	-50.6	-13.0	37.6

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-56.2	-56.4	1.6	8.2	-49.8	-13.0	36.8

Channel: 20393

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3508.6	-56.3	-56.7	1.6	8.3	-49.9	-13.0	36.9

**64QAM, BW 1.4MHz
Channel: 19957**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3421.4	-56.3	-56.8	1.5	8.0	-50.4	-13.0	37.4

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-56.2	-56.4	1.6	8.2	-49.8	-13.0	36.8

Channel: 20393

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3508.6	-56.2	-56.6	1.6	8.3	-49.8	-13.0	36.8

QPSK, BW 3MHz**Channel: 19965**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3423.0	-56.0	-56.7	1.5	8.0	-50.2	-13.0	37.2

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-56.0	-56.2	1.6	8.2	-49.6	-13.0	36.6

Channel: 20385

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3507.0	-56.1	-56.4	1.6	8.3	-49.6	-13.0	36.6

16QAM, BW 3MHz**Channel: 19965**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3423.0	-56.0	-56.7	1.5	8.0	-50.2	-13.0	37.2

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-56.3	-56.5	1.6	8.2	-49.9	-13.0	36.9

Channel: 20385

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3507.0	-56.0	-56.3	1.6	8.3	-49.5	-13.0	36.5

64QAM, BW 3MHz**Channel: 19965**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3423.0	-56.1	-56.8	1.5	8.0	-50.3	-13.0	37.3

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-55.9	-56.1	1.6	8.2	-49.5	-13.0	36.5

Channel: 20385

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3507.0	-55.9	-56.2	1.6	8.3	-49.4	-13.0	36.4

QPSK, BW 5MHz**Channel: 19975**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3425.0	-55.9	-56.1	1.6	8.0	-49.6	-13.0	36.6

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-55.9	-56.1	1.6	8.2	-49.5	-13.0	36.5

Channel: 20375

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3505.0	-56.2	-56.8	1.6	8.4	-50.0	-13.0	37.0

16QAM, BW 5MHz**Channel: 19975**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3425.0	-56.2	-56.4	1.6	8.0	-49.9	-13.0	36.9

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-56.3	-56.5	1.6	8.2	-49.9	-13.0	36.9

Channel: 20375

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3505.0	-56.4	-57.0	1.6	8.4	-50.2	-13.0	37.2

64QAM, BW 5MHz**Channel: 19975**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3425.0	-56.1	-55.0	1.6	8.0	-48.5	-13.0	35.5

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-56.1	-56.3	1.6	8.2	-49.7	-13.0	36.7

Channel: 20375

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3505.0	-56.2	-56.8	1.6	8.4	-50.0	-13.0	37.0

QPSK, BW 10MHz**Channel: 20000**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3430.0	-56.4	-56.7	1.6	8.0	-50.2	-13.0	37.2

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-56.3	-56.5	1.6	8.2	-49.9	-13.0	36.9

Channel: 20350

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3500.0	-56.2	-56.6	1.6	8.4	-49.8	-13.0	36.8

16QAM, BW 10MHz**Channel: 20000**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3430.0	-56.3	-56.6	1.6	8.0	-50.1	-13.0	37.1

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-56.0	-56.2	1.6	8.2	-49.6	-13.0	36.6

Channel: 20350

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3500.0	-56.1	-56.5	1.6	8.4	-49.7	-13.0	36.7

64QAM, BW 10MHz**Channel: 20000**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3430.0	-56.1	-56.4	1.6	8.0	-49.9	-13.0	36.9

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-56.0	-56.2	1.6	8.2	-49.6	-13.0	36.6

Channel: 20350

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3500.0	-56.5	-56.9	1.6	8.4	-50.1	-13.0	37.1

QPSK, BW 15MHz**Channel: 20025**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3435.0	-56.5	-57.0	1.6	8.1	-50.5	-13.0	37.5

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-56.0	-56.2	1.6	8.2	-49.6	-13.0	36.6

Channel: 20325

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3495.0	-56.3	-56.6	1.6	8.3	-49.8	-13.0	36.8

16QAM, BW 15MHz**Channel: 20025**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3435.0	-56.4	-56.9	1.6	8.1	-50.4	-13.0	37.4

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-56.4	-56.6	1.6	8.2	-50.0	-13.0	37.0

Channel: 20325

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3495.0	-56.2	-56.5	1.6	8.3	-49.7	-13.0	36.7

64QAM, BW 15MHz**Channel: 20025**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3435.0	-56.5	-57.0	1.6	8.1	-50.5	-13.0	37.5

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-56.2	-56.4	1.6	8.2	-49.8	-13.0	36.8

Channel: 20325

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3495.0	-56.4	-56.7	1.6	8.3	-49.9	-13.0	36.9

QPSK, BW 20MHz**Channel: 20050**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3440.0	-56.0	-56.3	1.6	8.1	-49.8	-13.0	36.8

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-56.1	-56.3	1.6	8.2	-49.7	-13.0	36.7

Channel: 20300

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3490.0	-55.9	-56.3	1.6	8.3	-49.6	-13.0	36.6

16QAM, BW 20MHz**Channel: 20050**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3440.0	-56.1	-56.4	1.6	10.3	-47.7	-13.0	34.7

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-56.4	-56.6	1.6	10.4	-47.8	-13.0	34.8

Channel: 20300

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3490.0	-56.5	-56.9	1.6	10.5	-48.0	-13.0	35.0

64QAM, BW 20MHz**Channel: 20050**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3440.0	-56.4	-56.7	1.6	10.3	-48.0	-13.0	35.0

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-56.4	-56.6	1.6	10.4	-47.8	-13.0	34.8

Channel: 20300

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3490.0	-56.2	-56.6	1.6	10.5	-47.7	-13.0	34.7


4.6 Frequency Stability

4.6.1 Measurement procedure

[FCC 27.54, 2.1055]

The EUT was placed of an inside of an constant temperature chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10°C intervals and the unit was allowed to stabilize at each measurement. The frequency drift was measured with the normal Temperature and voltage tolerance and it is presented as the ppm unit.

- Test configuration

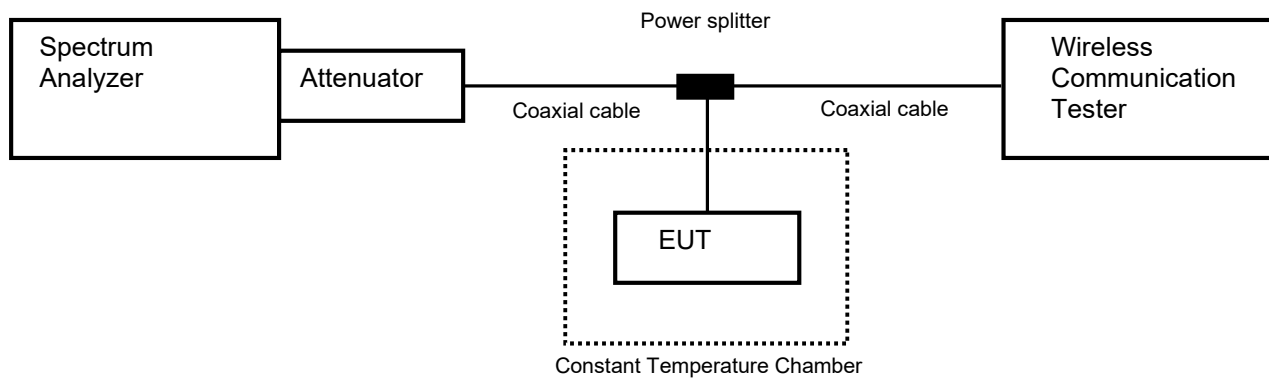

4.6.2 Limit

±2.5 ppm

4.6.3 Measurement result

Date : 9-September-2020
 Temperature : 24.5 [°C]
 Humidity : 53.2 [%]
 Test place : Shielded room No.4

Test engineer : Chiaki Kanno

Date : 10-September-2020
 Temperature : 23.3 [°C]
 Humidity : 56.8 [%]
 Test place : Shielded room No.4

Test engineer : Chiaki Kanno

[WCDMA Band IV]
Channel: 1413

Limit: $\pm 0.00025\% = \pm 2.5\text{ppm}$					
Power Supply	Temperature	Measurements Frequency	Frequency Tolerance	Limit	Result
[V]	[°C]	[Hz]	[ppm]	[ppm]	
3.85	25(Ref.)	1,732,599,982	0.00000	± 2.5	Pass
	50	1,732,599,980	-0.00136	± 2.5	Pass
	40	1,732,599,981	-0.00096	± 2.5	Pass
	30	1,732,599,985	0.00145	± 2.5	Pass
	20	1,732,599,986	0.00214	± 2.5	Pass
	10	1,732,599,976	-0.00400	± 2.5	Pass
	0	1,732,599,986	0.00197	± 2.5	Pass
	-10	1,732,599,982	0.00000	± 2.5	Pass
	-20	1,732,599,981	-0.00065	± 2.5	Pass
	-30	1,732,599,980	-0.00125	± 2.5	Pass
3.27	25	1,732,599,981	-0.00065	± 2.5	Pass
4.43	25	1,732,599,980	-0.00168	± 2.5	Pass

[LTE Band IV]
QPSK, BW 20MHz
Channel: 20175

Limit: $\pm 0.00025\% = \pm 2.5\text{ppm}$					
Power Supply	Temperature	Measurements Frequency	Frequency Tolerance	Limit	Result
[V]	[°C]	[Hz]	[ppm]	[ppm]	
3.85	25(Ref.)	1,732,499,994	0.00000	± 2.5	Pass
	50	1,732,499,988	-0.00384	± 2.5	Pass
	40	1,732,499,987	-0.00438	± 2.5	Pass
	30	1,732,499,987	-0.00439	± 2.5	Pass
	20	1,732,499,982	-0.00729	± 2.5	Pass
	10	1,732,499,990	-0.00218	± 2.5	Pass
	0	1,732,499,990	-0.00221	± 2.5	Pass
	-10	1,732,499,988	-0.00337	± 2.5	Pass
	-20	1,732,499,989	-0.00292	± 2.5	Pass
	-30	1,732,499,989	-0.00311	± 2.5	Pass
3.27	25	1,732,499,992	-0.00147	± 2.5	Pass
4.43	25	1,732,499,988	-0.00330	± 2.5	Pass

Calculation;

Frequency Tolerance (ppm) = Measurements Frequency (Hz) – Reference Frequency (Hz) / Reference Frequency (Hz) x 1000000

5 Measurement Uncertainty

Expanded uncertainties stated are calculated with a coverage Factor $k=2$.
Please note that these results are not taken into account when measurement uncertainty considerations contained in ETSI TR 100 028 Parts 1 and 2 determining compliance or non-compliance with test result.

Test item	Measurement uncertainty
Conducted emission, AMN (9 kHz – 150 kHz)	± 3.8 dB
Conducted emission, AMN (150 kHz – 30 MHz)	± 3.3 dB
Radiated emission (9kHz – 30 MHz)	± 3.1 dB
Radiated emission (30 MHz – 1000 MHz)	± 4.9 dB
Radiated emission (1 GHz – 6 GHz)	± 4.8 dB
Radiated emission (6 GHz – 18 GHz)	± 5.1 dB
Radiated emission (18 GHz – 40 GHz)	± 5.8 dB
Radio Frequency	$\pm 1.4 \cdot 10^{-8}$
RF power, conducted	± 0.6 dB
Temperature	± 0.6 °C
Humidity	± 1.2 %
Voltage (DC)	± 0.4 %
Voltage (AC, <10kHz)	± 0.2 %

Judge	Measured value and standard limit value	
PASS	Case1 Even if it takes uncertainty into consideration, a standard limit value is fulfilled.	
	Case2 Although measured value is in a standard limit value, a limit value won't be fulfilled if uncertainty is taken into consideration.	
FAIL	Case3 Although measured value exceeds a standard limit value, a limit value will be fulfilled if uncertainty is taken into consideration.	
	Case4 Even if it takes uncertainty into consideration, a standard limit value isn't fulfilled.	

6 Laboratory Information

Testing was performed and the report was issued at:

TÜV SÜD Japan Ltd. Yonezawa Testing Center

Address: 5-4149-7 Hachimanpara, Yonezawa-shi, Yamagata, 992-1128 Japan
Phone: +81-238-28-2881
Fax: +81-238-28-2888

Accreditation and Registration

A2LA

Certificate #3686.03

VLAC

Accreditation No.: VLAC-013

BSMI

Laboratory Code: SL2-IN-E-6018, SL2-A1-E-6018

Innovation, Science and Economic Development Canada
ISED#: 4224A

VCCI Council

Registration number	Expiration date
A-0166	03-July-2021

Appendix A. Test Equipment

Antenna port conducted test

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
Spectrum analyzer	Agilent Technologies	E4440A	US44302655	04-Aug-2020	05-Aug-2019
				19-Aug-2021	20-Aug-2020
Attenuator	Weinschel	56-10	J4180	20-Jul-2021	21-Jul-2020
Microwave cable	HUBER+SUHNER	SUCOFLEX 104/1m	199120/4	25-Mar-2021	26-Mar-2020
Microwave cable	HUBER+SUHNER	SUCOFELX102/2m	MY3385/2	25-Mar-2021	26-Mar-2020
Power divider	ANRITSU	K240B	020205	20-Jul-2021	21-Jul-2020
Wideband Radio Frequency Tester	ROHDE&SCHWARZ	CMW500	126079	13-Nov-2020	14-Nov-2019
Wideband Radio Frequency Tester	ROHDE&SCHWARZ	CMW500	116338	26-Aug-2020	27-Aug-2019
				01-Sep-2021	02-Sep-2020
Temperature and humidity chamber	ESPEC	PL1KP	14007261	01-Sep-2021	02-Sep-2020

Radiated emission

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ESCI	100765	24-Sep-2020	25-Sep-2019
Spectrum analyzer	Agilent Technologies	E4447A	MY46180188	26-Mar-2021	27-Mar-2020
Spectrum analyzer	Agilent Technologies	E4440A	US40420937	25-Sep-2020	26-Sep-2019
Preamplifier	SONOMA	310	372170	25-Sep-2020	26-Sep-2019
Biconical antenna	Schwarzbeck	VHA9103/BBA9106	VHA91031308	03-Dec-2020	04-Dec-2019
Log periodic antenna	Schwarzbeck	UHALP9108A	0728	16-Apr-2021	17-Apr-2020
Attenuator	TAMAGAWA.ELEC	CFA-01/6dB	N/A(S465)	01-Oct-2020	02-Oct-2019
Attenuator	TAMAGAWA.ELEC	CFA-10/3dB	N/A(S503)	19-Jul-2021	20-Jul-2020
Preamplifier	TSJ	MLA-100M18-B02-40	1929118	27-Aug-2020	28-Aug-2019
Attenuator	AEROFLEX	26A-10	081217-08	25-Mar-2021	26-Mar-2020
Double ridged guide antenna	ETS LINDGREN	3117	00224193	07-Apr-2021	08-Apr-2020
Attenuator	Agilent Technologies	8491B	MY39268633	17-Dec-2020	18-Dec-2019
Double ridged guide antenna	A.H.Systems Inc.	SAS-574	469	27-Aug-2020	28-Aug-2019
Preamplifier	TSJ	MLA-1840-B03-35	1240332	27-Aug-2020	28-Aug-2019
Band rejection filter	Micro-Tronics	BRC50719	014	17-Dec-2020	18-Dec-2019
High Pass Filter	Wainwright	WHKX2.8/18G-6SS	1	20-Jul-2021	21-Jul-2020
Signal generator	ROHDE&SCHWARZ	SMB100A	177525	13-Jul-2021	14-Jul-2020
RF power amplifier	R&K	CGA020M602-2633R	B40240	14-May-2021	15-May-2020
Microwave cable	HUBER+SUHNER	SUCOFELX102/2m	31648	25-Mar-2021	26-Mar-2020
Dipole antenna	Schwarzbeck	VHAP	1020	12-Aug-2021	13-Aug-2020
Dipole antenna	Schwarzbeck	VHAP	1021	12-Aug-2021	13-Aug-2020
Dipole antenna	Schwarzbeck	UHAP	994	05-Aug-2021	06-Aug-2020
Dipole antenna	Schwarzbeck	UHAP	993	05-Aug-2021	06-Aug-2020
Double ridged guide antenna	EMCO	3115	5205	23-Apr-2021	24-Apr-2020
Double ridged guide antenna	ETS LINDGREN	3117	00218815	25-Mar-2021	26-Mar-2020
Wideband Radio Frequency Tester	ROHDE&SCHWARZ	CMW500	126079	13-Nov-2020	14-Nov-2019
Wideband Radio Frequency Tester	ROHDE&SCHWARZ	CMW500	116338	26-Aug-2020	27-Aug-2019
				01-Sep-2021	02-Sep-2020
Microwave cable	HUBER+SUHNER	SUCOFLEX104/9m	MY30037/4	07-Jan-2021	08-Jan-2020
		SUCOFLEX104/1m	my24610/4	07-Jan-2021	08-Jan-2020
		SUCOFLEX104/8m	SN MY30031/4	07-Jan-2021	08-Jan-2020
		SUCOFLEX104	MY32976/4	07-Jan-2021	08-Jan-2020
		SUCOFLEX104/1.5m	MY19309/4	07-Jan-2021	08-Jan-2020
		SUCOFLEX104/7m	41625/6	07-Jan-2021	08-Jan-2020
PC	DELL	DIMENSION E521	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/RE-AJ	0611193/V5.6.0	N/A	N/A
Absorber	RIKEN	PFP30	N/A	N/A	N/A
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-NSA)	27-May-2021	28-May-2020

*: The calibrations of the above equipment are traceable to NIST or equivalent standards of the reference organizations.