



SAR TEST REPORT

For

Shenzhen DOOGEE Hengtong Technology CO., LTD

Smart Phone

Test Model: Blade GT

Additional Model No.: Please Refer to Page 10

Prepared for : Shenzhen DOOGEE Hengtong Technology CO., LTD
Address : B, 2/F, Building A4, Silicon Valley Power Digital Industrial Park, No. 22, Longhua New District, Shenzhen, China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : November 04, 2024
Number of tested samples : 1
Sample number : A241031015-1
Serial number : Prototype
Date of Test : November 04, 2024 ~ November 18, 2024
Date of Report : December 17, 2024



**SAR TEST REPORT**

Report Reference No.....: LCSA10314045E001

Date Of Issue: December 17, 2024

Testing Laboratory Name.....: Shenzhen LCS Compliance Testing Laboratory Ltd.

Address: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Testing Location/ Procedure: Full application of Harmonised standards ☒
Partial application of Harmonised standards ☐
Other standard testing method ☐**Applicant's Name: Shenzhen DOOGEE Hengtong Technology CO., LTD**

Address: B, 2/F, Building A4, Silicon Valley Power Digital Industrial Park, No. 22, Longhua New District, Shenzhen, China

Test Specification:

Standard.....: FCC 47CFR § 2.1093, ANSI/IEEE C95.1-2019, IEEE 1528-2013

Test Report Form No.....: TRF-4-E-102 A/0

TRF Originator.....: Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF: Dated 2014-09

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description.: Smart Phone

Trade Mark.....: DOOGEE

Model/Type Reference: Blade GT

Ratings.....: DC 3.87V by Rechargeable Li-ion Battery, 5500mAh

Result: Positive**Compiled by:**

Jay Zhan

Jay Zhan/ File administrators

Supervised by:

Cary Luo

Cary Luo / Technique principal

Approved by:

Gavin Liang

Gavin Liang/ Manager





SAR -- TEST REPORT

Test Report No. :	LCSA10314045E001	December 17, 2024 Date of issue
EUT.....	: Smart Phone	
Type/Model	: Blade GT	
Applicant.....	: Shenzhen DOOGEE Hengtong Technology CO., LTD	
Address.....	: B, 2/F, Building A4, Silicon Valley Power Digital Industrial Park, No. 22, Longhua New District, Shenzhen, China	
Telephone.....	: /	
Fax.....	: /	
Manufacturer.....	: Shenzhen DOOGEE Hengtong Technology CO., LTD	
Address.....	: B, 2/F, Building A4, Silicon Valley Power Digital Industrial Park, No. 22, Longhua New District, Shenzhen, China	
Telephone.....	: /	
Fax.....	: /	
Factory.....	: Shenzhen DOOGEE Hengtong Technology CO., LTD	
Address.....	: B, 2/F, Building A4, Silicon Valley Power Digital Industrial Park, No. 22, Longhua New District, Shenzhen, China	
Telephone.....	: /	
Fax.....	: /	

Test Result	Positive
-------------	----------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.





Revision History

Revision	Issue Date	Revision Content	Revised By
000	November 19, 2024	Initial Issue	---
001	December 17, 2024	See Note	---
Note: At the customer's request, the revised report was submitted to LCSA10314045E001 applicant by quoting the test data of LCSA10314045E original report. Bluetooth Version: V5.2 Change to Bluetooth Version: V5.0 Add 5GWIFI ac40 and ac80 modes and the original report is invalid.			





TABLE OF CONTENTS

1. TEST STANDARDS AND TEST DESCRIPTION.....	6
1.1. STATEMENT OF COMPLIANCE	6
1.2. TEST LOCATION.....	8
1.3. TEST FACILITY.....	9
1.4. TEST LABORATORY ENVIRONMENT	10
1.5. PRODUCT DESCRIPTION	11
1.6. DUT ANTENNA LOCATIONS	14
1.7. TEST SPECIFICATION.....	16
1.8. RF EXPOSURE LIMITS	17
1.9. EQUIPMENT LIST	18
2. SAR MEASUREMENTS SYSTEM CONFIGURATION	19
2.1. SAR MEASUREMENT SYSTEM	19
2.2. ISOTROPIC E-FIELD PROBE EX3DV4.....	21
2.3. DATA ACQUISITION ELECTRONICS (DAE).....	22
2.4. SAM TWIN PHANTOM	22
2.5. ELI PHANTOM	23
2.6. DEVICE HOLDER FOR TRANSMITTERS.....	24
2.7. MEASUREMENT PROCEDURE	25
3. SAR MEASUREMENT VARIABILITY AND UNCERTAINTY.....	29
3.1. SAR MEASUREMENT VARIABILITY.....	29
3.2. SAR MEASUREMENT UNCERTAINTY	29
4. DESCRIPTION OF TEST POSITION.....	30
4.1. HEAD EXPOSURE CONDITION	30
4.2. BODY EXPOSURE CONDITION	33
4.3. EXTREMITY EXPOSURE CONDITIONS	34
5. SAR SYSTEM VERIFICATION PROCEDURE	34
5.1. TISSUE SIMULATE LIQUID.....	34
5.2. SAR SYSTEM CHECK.....	36
6. SAR MEASUREMENT PROCEDURE	39
6.1. CONDUCTED POWER MEASUREMENT	39
6.2. GSM TEST CONFIGURATION.....	39
6.3. UMTS TEST CONFIGURATION	39
6.4. LTE TEST CONFIGURATION.....	41
6.5. WIFI TEST CONFIGURATION.....	41
6.6. POWER REDUCTION	44
6.7. POWER DRIFT	44
7. TEST CONDITIONS AND RESULTS.....	44
7.1. CONDUCTED POWER RESULTS	44
7.2. STAND-ALONE SAR TEST EVALUATION	89
7.3. SAR MEASUREMENT RESULTS	90
7.4. MULTIPLE TRANSMITTER EVALUATION.....	107





1. TEST STANDARDS AND TEST DESCRIPTION

1.1. Statement of Compliance

The maximum of results of SAR found during testing for Blade GT are follows:

<Highest Reported standalone SAR Summary>

Classment Class	Frequency Band	Head (Report SAR1-g (W/kg))	Hotspot/Body-worn (Report SAR1-g (W/kg))
			(Separation Distance 10mm)
PCE	GSM 850	0.181	0.320
	GSM1900	0.207	0.192
	WCDMA Band II	0.178	0.161
	WCDMA Band IV	0.200	0.183
	WCDMA Band V	0.220	0.333
	LTE Band 7	0.600	0.759
	LTE Band 19	0.247	0.413
	LTE Band 25/2	0.224	0.238
	LTE Band 26/5	0.208	0.363
	LTE Band 38	0.613	0.733
	LTE Band 41	0.524	0.617
	LTE Band 66/4	0.331	0.287
DTS	WIFI2.4G ANT1	0.583	0.626
	WIFI2.4G ANT2	0.240	0.191
DSS	Bluetooth	0.207	/
NII	WIFI5.2G ANT1	0.230	0.193
	WIFI5.2G ANT2	0.194	0.216
	WIFI5.8G ANT1	0.154	0.083
	WIFI5.8G ANT2	0.124	0.130

Note

- 1) This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-2005, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013.
- 2) Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode;
- 3) Body worn only Front side,Rear side
- 4) According to April 2015 TCB workshop, SAR test exclusion can be applied for testing overlapping LTE bands as follows:
 - a) The maximum output power, including tolerance, for the smaller band must be $\leq$ the larger band to qualify for the SAR test exclusion.
 - b) The channel bandwidth and other operating parameters for the smaller band must be fully supported by the larger band.
 - LTE Band 4 (1710-1755 MHz) is covered by LTE band 66 (1710-1780 MHz) and has the same maximum tune-up power, so only LTE Band 66 needs to be tested.
 - LTE Band 2 (1850-1910 MHz) is covered by LTE band 25 (1850-1915 MHz) and has the same maximum tune-up power, so only LTE Band 25 needs to be tested.
 - LTE Band 5 (824-849 MHz) is covered by LTE band 26 (814-849 MHz) and has the same maximum tune-up power, so only LTE Band 26 needs to be tested.





<Highest Reported simultaneous SAR Summary>

Exposure Position	Classment Class	Body (Report SAR1-g (W/kg))	Highest Reported Simultaneous Transmission SAR1-g (W/kg)
Body	PCE	0.759	1.576
	DTS	0.626	
		0.191	





1.2. Test Location

Company: Shenzhen LCS Compliance Testing Laboratory Ltd.
Address: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Telephone: (+86)755-82591330
Fax: (+86)755-82591330
Web: www.LCS-cert.com
E-mail: webmaster@LCS-cert.com



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: (+86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



1.3. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

Site Description
SAR Lab.

: NVLAP Accreditation Code is 600167-0.
FCC Designation Number is CN5024.
CAB identifier is CN0071.
CNAS Registration Number is L4595.
Test Firm Registration Number: 254912.



1.4. Test Laboratory Environment

Temperature	Min. = 18°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 Ω
Atmospheric pressure:	950-1050mbar
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	



1.5. Product Description

The **Shenzhen DOOGEE Hengtong Technology CO., LTD**'s Model: Blade GT or the "EUT" as referred to in this report; more general information as follows, for more details, refer to the user's manual of the EUT.

EUT	:	Smart Phone
Test Model	:	Blade GT
Additional Model No.	:	Blade GT Ultra, Blade GT Play, Blade GT Pro, Blade GT Max, Blade10 Play, Blade10 Max 5G
Power Supply	:	DC 3.87V by Rechargeable Li-ion Battery, 5500mAh
Hardware Version	:	M163-MUB-V2
Software Version	:	DOOGEE-Blade_GT-EEA-Android14.0-20240830
Bluetooth	:	
Frequency Range	:	2402MHz~2480MHz
Channel Number	:	79 channels for Bluetooth V5.0 (DSS) 40 channels for Bluetooth V5.0 (DTS)
Channel Spacing	:	1MHz for Bluetooth V5.0 (DSS)
Modulation Type	:	GFSK, $\pi/4$ -DQPSK, 8-DPSK for Bluetooth V5.0 (DSS) GFSK for Bluetooth V5.0 (DTS)
Bluetooth Version	:	V5.0
Antenna Description	:	PIFA Antenna, 1.54dBi(Max.)
WIFI(2.4G Band)	:	
Frequency Range	:	2412MHz~2462MHz
Channel Spacing	:	5MHz
Channel Number	:	11 Channels for 20MHz bandwidth (2412~2462MHz)
Modulation Type	:	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK)
Antenna Description	:	ANT1:PIFA Antenna, 1.54dBi(Max.) ANT2:PIFA Antenna, -1.72dBi(Max.)
5.2G WLAN	:	
Frequency Range	:	5180MHz~5240MHz
Channel Number	:	4 Channels for 20MHz bandwidth(5180MHz~5240MHz) 2 channels for 40MHz bandwidth(5190MHz~5230MHz) 1 channels for 80MHz bandwidth(5210MHz)
Modulation Type	:	IEEE 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)
Antenna Description	:	ANT1:PIFA Antenna, -1.44dBi(Max.) ANT2:PIFA Antenna, -1.23dBi(Max.)
5.8G WLAN	:	
Frequency Range	:	5745MHz~5825MHz
Channel Number	:	5 channels for 20MHz bandwidth(5745MHz~5825MHz) 2 channels for 40MHz bandwidth(5755MHz~5795MHz) 1 channels for 80MHz bandwidth(5775MHz)
Modulation Type	:	IEEE 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)
Antenna Description	:	ANT1:PIFA Antenna, -1.44dBi(Max.) ANT2:PIFA Antenna, -1.23dBi(Max.)





2G :

Support Band : ☒ GSM 850 (U.S.-Band) ☒ PCS 1900 (U.S.-Band)

Release Version : R99

GPRS Class : Class 12

EGPRS Class : Class 12

Type Of Modulation : GMSK for GSM/GPRS; GMSK/8PSK for EGPRS

Antenna Description : PIFA Antenna
-3.64dBi(max.) For GSM 850
-0.6dBi(max.) For PCS 1900

3G :

Support Band : ☒ WCDMA Band II (U.S.-Band)
☒ WCDMA Band IV (U.S.-Band)
☒ WCDMA Band V (U.S.-Band)

Release Version : R8

Type Of Modulation : QPSK,16QAM

Antenna Description : PIFA Antenna
-0.6dBi(max.) For WCDMA Band II
-1.15dBi(max.) For WCDMA Band IV
-3.64dBi(max.) For WCDMA Band V

LTE :

Support Band : ☒ E-UTRA Band 2(U.S.-Band)
☒ E-UTRA Band 4(U.S.-Band)
☒ E-UTRA Band 5(U.S.-Band)
☒ E-UTRA Band 7(U.S.-Band)
☒ E-UTRA Band 19(U.S.-Band)
☒ E-UTRA Band 25(U.S.-Band)
☒ E-UTRA Band 26(U.S.-Band)
☒ E-UTRA Band 38(U.S.-Band)
☒ E-UTRA Band 41(U.S.-Band)
☒ E-UTRA Band 66(U.S.-Band)

LTE Release Version : R12

Type Of Modulation : QPSK/16QAM

Antenna Description : PIFA Antenna
-0.6dBi(max.) For E-UTRA Band 2
-1.15dBi(max.) For E-UTRA Band 4
-3.64dBi(max.) For E-UTRA Band 5
-1.5dBi(max.) For E-UTRA Band 7
-3.64dBi(max.) For E-UTRA Band 19
-0.6dBi(max.) For E-UTRA Band 25
3.64dBi(max.) For E-UTRA Band 26
-2.05dBi(max.) For E-UTRA Band 38
0.51dBi(max.) For E-UTRA Band 41
-1.15dBi(max.) For E-UTRA Band 66

Power Class : Class 3

GPS Receiver

Frequency Bands : GPS(L1): 1575.42MHz;
GPS(L5): 1176.45MHz ;






Antenna Description : ANT1:PIFA Antenna, -1.95dBi(Max.)
ANT2:PIFA Antenna, -2.34dBi(Max.)



1.6. DUT Antenna Locations

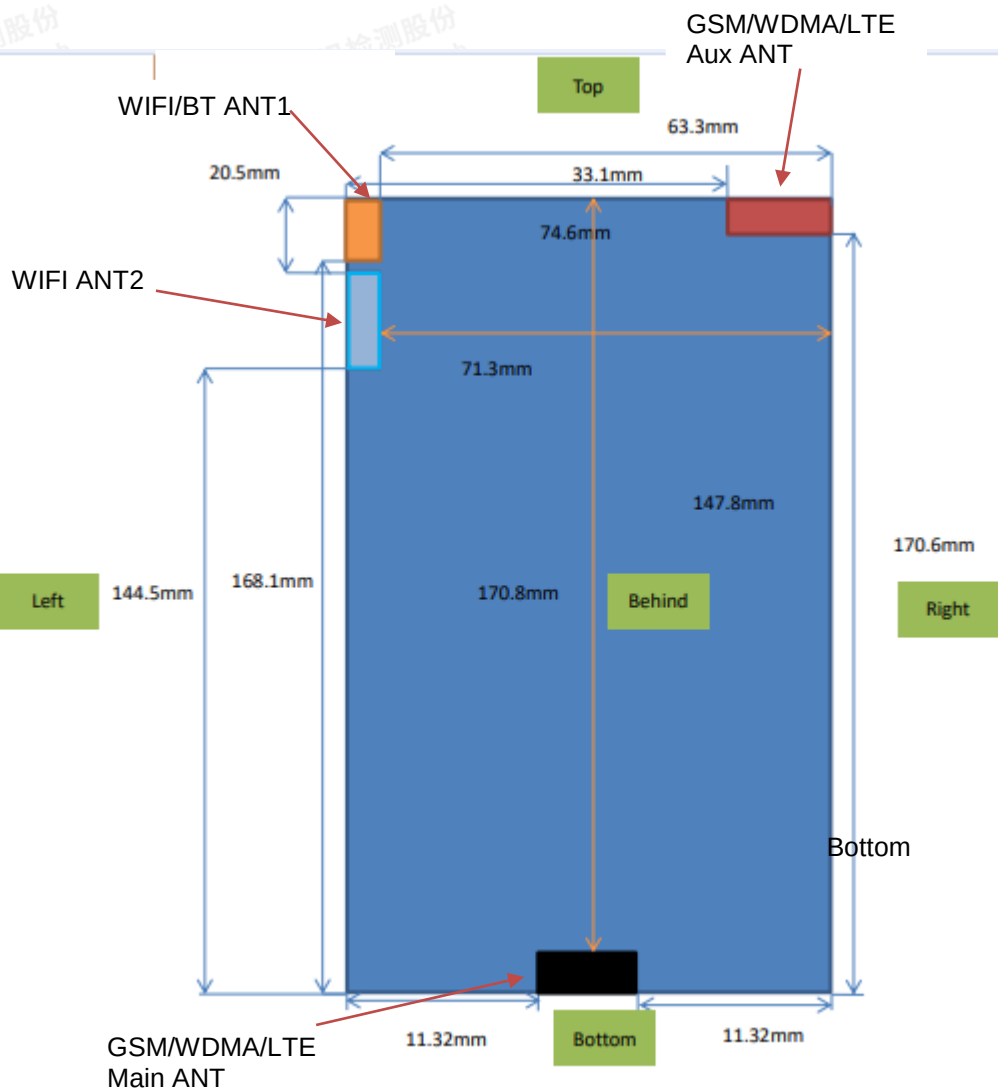

Note:

- 1) Main Antenna: GSM850/1900, WCDMA Band II/IV/V, LTE Band 2/4/5/7/19/25/26/38/41/66, the Div ant only for Rx.
- 2) The test device is a smart phone. The overall diagonal dimension of this device is 189 mm. Per KDB 648474 D04, because the diagonal distance of this device is ≥ 160 mm, so it is a phablet.

According to the distance between LTE/WCDMA/GSM&WIFI&BT antennas and the sides of the EUT we can draw the conclusion that:

Distance from the antenna to the EUT edge(mm)						
Mode	Front	Back	Left	Right	Top	Bottom
GSM/WCDMA/LTE Antenna	5	5	11.32	11.32	170.8	5
Bluetooth/WIFI Antenna 1	5	5	5	71.3	5	168.1
WIFI Antenna 2	5	5	5	71.3	20.5	144.5

EUT Sides for SAR Testing							
Mode	Exposure Condition	Front	Back	Left	Right	Top	Bottom
GSM/WCDMA/LTE Antenna	Body 1g SAR	Yes	Yes	Yes	Yes	No	Yes
Bluetooth/WIFI Antenna 1	Body 1g SAR	Yes	Yes	Yes	No	Yes	No
WIFI Antenna 2	Body 1g SAR	Yes	Yes	Yes	No	Yes	No





Table 1: EUT Sides for SAR Testing

Note:

When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.





1.7. Test Specification

Identity	Document Title
FCC 47CFR §2.1093	Radiofrequency Radiation Exposure Evaluation: Portable Devices
ANSI/IEEE C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.
IEEE 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
KDB 941225 D01	3G SAR Measurement Procedures v03r01
KDB 941225 D05	SAR for LTE Devices v02r05
KDB 941225 D06	Hotspot Mode SAR v02r01
KDB 248227 D01	SAR Guidance for IEEE 802.11 Wi-Fi SAR v02r02
KDB 648474 D04	Handset SAR v01r03
KDB 447498 D01	General RF Exposure Guidance v06
KDB 865664 D01	SAR Measurement 100 MHz to 6 GHz v01r04
KDB 865664 D02	RF Exposure Reporting v01r02
KDB 690783 D01	SAR Listings on Grants v01r03





1.8. RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain*Trunk)	1.60 mW/g	8.00 mW/g
Spatial Average SAR** (Whole Body)	0.08 mW/g	0.40 mW/g
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

Notes:

* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time

** The Spatial Average value of the SAR averaged over the whole body.

*** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation.)





1.9. Equipment list

Test Platform		SPEAG DASY5 Professional				
Description		SAR Test System (Frequency range 300MHz-6GHz)				
Software Reference		DASY52; SEMCAD X				
Hardware Reference						
Equipment		Manufacturer	Model	Serial Number	Calibration Date	Due date of calibration
☒	PC	Lenovo	NA	NA	NA ¹	NA ¹
☒	Twin Phantom	SPEAG	SAM V5.0	1850	NA ¹	NA ¹
☒	ELI Phantom	SPEAG	ELI V6.0	2010	NA ¹	NA ¹
☒	DAE	SPEAG	DAE3	373	2024/1/3	2025/1/2
☒	E-Field Probe	SPEAG	EX3DV4	3805	2023/11/23	2024/11/22
☒	Validation Kits	SPEAG	D835V2	4d124	2023/10/24	2026/10/23
☒	Validation Kits	SPEAG	D1750V2	1035	2023/6/12	2026/6/11
☒	Validation Kits	SPEAG	D1900V2	5d055	2023/10/20	2026/10/19
☒	Validation Kits	SPEAG	D2450V2	808	2023/10/23	2026/10/22
☒	Validation Kits	SPEAG	D2600V2	1071	2023/6/20	2026/6/19
☒	Validation Kits	SPEAG	D5GHzV2	1046	2023/10/23	2026/10/22
☒	Agilent Network Analyzer	Agilent	8753E	SU38432944	2024/6/6	2025/6/5
☒	Dielectric Probe Kit	SPEAG	DAK3.5	1425	2024/6/6	2025/6/5
☒	Universal Radio Communication Tester	R&S	CMW500	42115	2024/10/8	2025/10/7
☒	Directional Coupler	MCLI/USA	4426-20	03746	2024/6/6	2025/6/5
☒	Power meter	Agilent	E4419B	MY45104493	2024/10/8	2025/10/7
☒	Power meter	Agilent	E4419B	MY45100308	2024/10/8	2025/10/7
☒	Power sensor	Agilent	E9301H	MY41495616	2024/10/8	2025/10/7
☒	Power sensor	Agilent	E9301H	MY41495234	2024/10/8	2025/10/7
☒	Signal Generator	Agilent	E4438C	MY49072627	2024/6/6	2025/6/5
☒	Broadband Preamplifier	/	BP-01M18G	P190501	2024/6/6	2025/6/5
☒	DC POWER SUPPLY	I-SHENG	SP-504	NA	2024/6/6	2025/6/5
☒	Speed reading thermometer	HTC-1	NA	LCS-E-138	2024/6/6	2025/6/5

Note: All the equipments are within the valid period when the tests are performed.

“1” : NA as this is not measurement equipment.




2.1. SAR Measurement System

The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.



F-1. SAR Measurement System Configuration

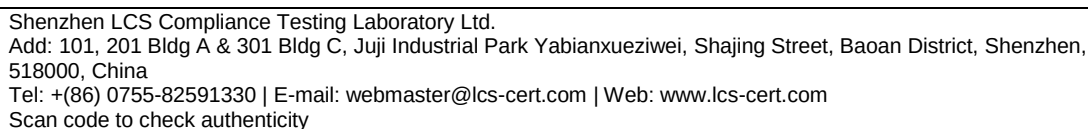



- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7.
- DASY5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand, right-hand and Body Worn usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validating the proper functioning of the system.






2.2. Isotropic E-field Probe EX3DV4

	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available.
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI



2.3. Data Acquisition Electronics (DAE)

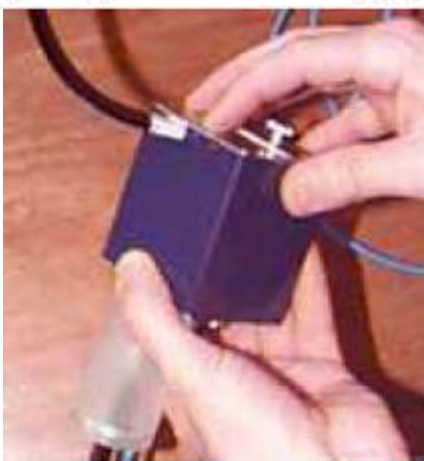Model	DAE	
Construction	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY4/5 embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.	
Measurement Range	-100 to +300 mV (16 bit resolution and two range settings: 4mV, 400mV)	
Input Offset Voltage	< 5μV (with auto zero)	
Input Bias Current	< 50 f A	
Dimensions	60 x 60 x 68 mm	

2.4. SAM Twin Phantom

Material	Vinylester, glass fiber reinforced (VE-GF)	
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
Shell Thickness	2 ± 0.2 mm (6 ± 0.2 mm at ear point)	
Dimensions (incl. Wooden Support)	Length: 1000 mm Width: 500 mm Height: adjustable feet	
Filling Volume	approx. 25 liters	
Wooden Support	SPEAG standard phantom table	

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEC-IEEE 62209-1528. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

Twin SAM V5.0 has the same shell geometry and is manufactured from the same material as Twin SAM V4.0, but has reinforced top structure.



2.5. ELI Phantom

Material	Vinylester, glass fiber reinforced (VE-GF)	
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
Shell Thickness	2.0 ± 0.2 mm (bottom plate)	
Dimensions	Major axis: 600 mm Minor axis: 400 mm	
Filling Volume	approx. 30 liters	
Wooden Support	SPEAG standard phantom table	

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.

ELI V5.0 has the same shell geometry and is manufactured from the same material as ELI4, but has reinforced top structure.



2.6. Device Holder for Transmitters



F-2. Device Holder for Transmitters

- The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centres for both scales are the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.
- The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon=3$ and loss tangent $\delta=0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.





2.7. Measurement procedure

2.7.1. Scanning procedure

Step 1: Power reference measurement

The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure.

Step 2: Area scan

The SAR distribution at the exposed side of the head was measured at a distance of 4mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 15mm*15mm or 12mm*12mm or 10mm*10mm. Based on the area scan data, the area of the maximum absorption was determined by spline interpolation.

Step 3: Zoom scan

Around this point, a volume of 32mm*32mm*30mm ($f \leq 2\text{GHz}$), 30mm*30mm*30mm (f for 2-3GHz) and 24mm*24mm*22mm (f for 5-6GHz) was assessed by measuring 5x5x7 points ($f \leq 2\text{GHz}$), 7x7x7 points (f for 2-3GHz) and 7x7x12 points (f for 5-6GHz). On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

The data at the surface was extrapolated, since the centre of the dipoles is 2.0mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. (This can be variable. Refer to the probe specification). The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The volume was integrated with the trapezoidal algorithm. One thousand points were interpolated to calculate the average. All neighbouring volumes were evaluated until no neighboring volume with a higher average value was found.

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std. 1528-2013.





			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm

Step 4: Power reference measurement (drift)

The Power Drift Measurement job measures the field at the same location as the most recent power reference measurement job within the same procedure, and with the same settings. The indicated drift is mainly the variation of the DUT's output power and should vary max. $\pm 5\%$

2.7.2. Data Storage

The DASY software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DAE4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated. The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [m W/g], [m W/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.





2.7.3. Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, ai0, ai1, ai2
- Conversion factor	ConvFi	
- Diode compression point	Dcpi	
Device parameters:	- Frequency	f
- Crest factor	cf	
Media parameters:	- Conductivity	ϵ
- Density	ρ	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf / dcpi$$

With V_i = compensated signal of channel i (i = x, y, z)

U_i = input signal of channel i (i = x, y, z)

cf = crest factor of exciting field (DASY parameter)

dcpi = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$$





H-field probes:

$$H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2) / f$$

With V_i = compensated signal of channel i (i = x, y, z)

Normi = sensor sensitivity of channel i (i = x, y, z)

[mV/(V/m)²] for E-field Probes

ConvF = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\epsilon \cdot 1000)$$

with SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ϵ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



3. SAR measurement variability and uncertainty

3.1. SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.

2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.

3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).

4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

3.2. SAR measurement uncertainty


Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.



4. Description of Test Position


4.1. Head Exposure Condition

4.1.1. SAM Phantom Shape

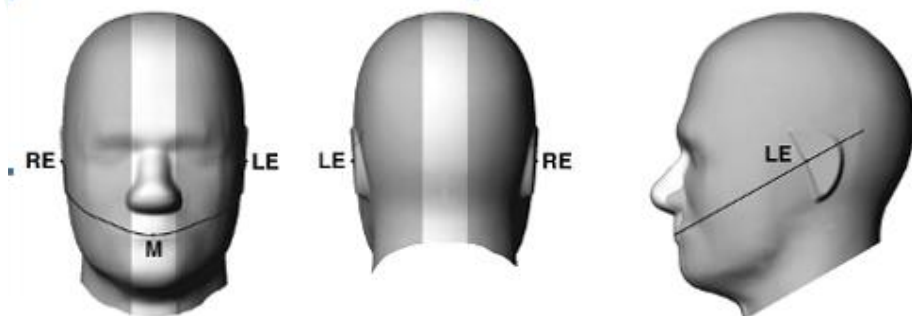


F-3. Front, back, and side views of SAM (model for the phantom shell). Full-head model is for illustration purposes only-procedures in this recommended practice are intended primarily for the phantom setup.


Note: The centre strip including the nose region has a different thickness tolerance.

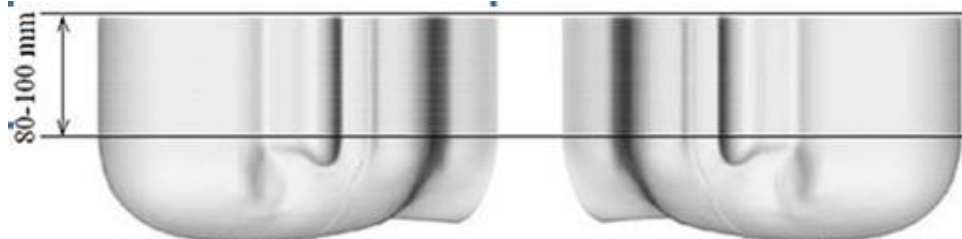

F-4. Sagittally bisected phantom with extended perimeter (shown placed on its side as used for SAR measurements)

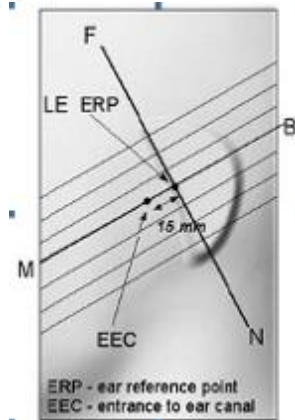


F-5. Close-up side view of phantom, showing the ear region, N-F and B-M lines, and seven cross-sectional plane locations

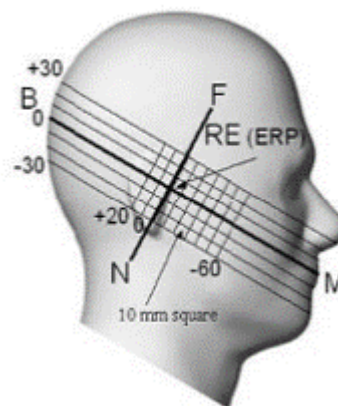


F-6. Side view of the phantom showing relevant markings and seven cross-sectional plane locations



4.1.2. EUT constructions

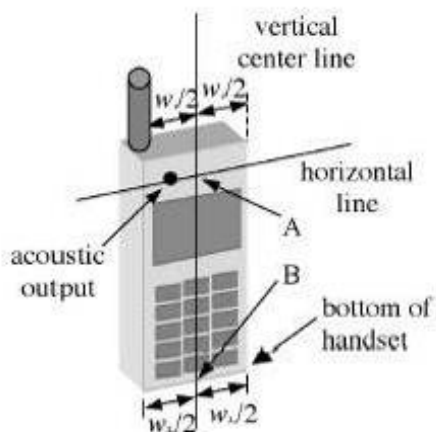

F-1. Handset vertical and horizontal reference lines-“fixed case”

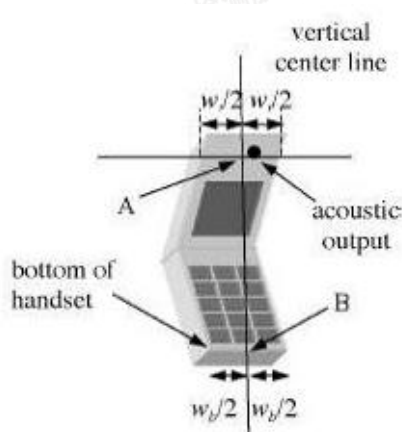

F-2. Handset vertical and horizontal reference lines-“clam-shell case”


4.1.3. Definition of the “cheek” position

- Position the device with the vertical centre line of the body of the device and the horizontal line crossing the centre of the ear piece in a plane parallel to the sagittal plane of the phantom (“initial position”). While maintaining the device in this plane, align the vertical centre line with the reference plane containing the three ear and mouth reference points (M, RE and LE) and align the centre of the ear piece with the line RE-LE.
- Translate the mobile phone box towards the phantom with the ear piece aligned with the line LE-RE until telephone touches the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the box until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost.




4.1.4. Definition of the “tilted” position

- Position the device in the “cheek” position described above;
- While maintaining the device in the reference plane described above and pivoting against the ear, move it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost.

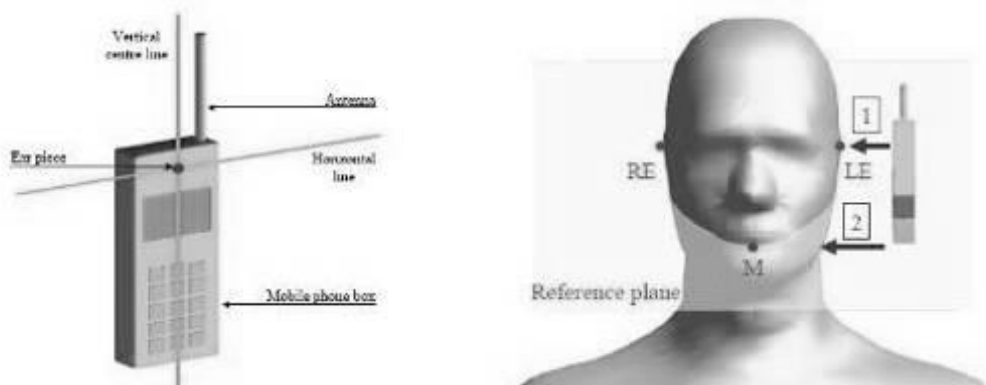

F-1. Definition of the reference lines and points, on the phone and on the phantom and initial position

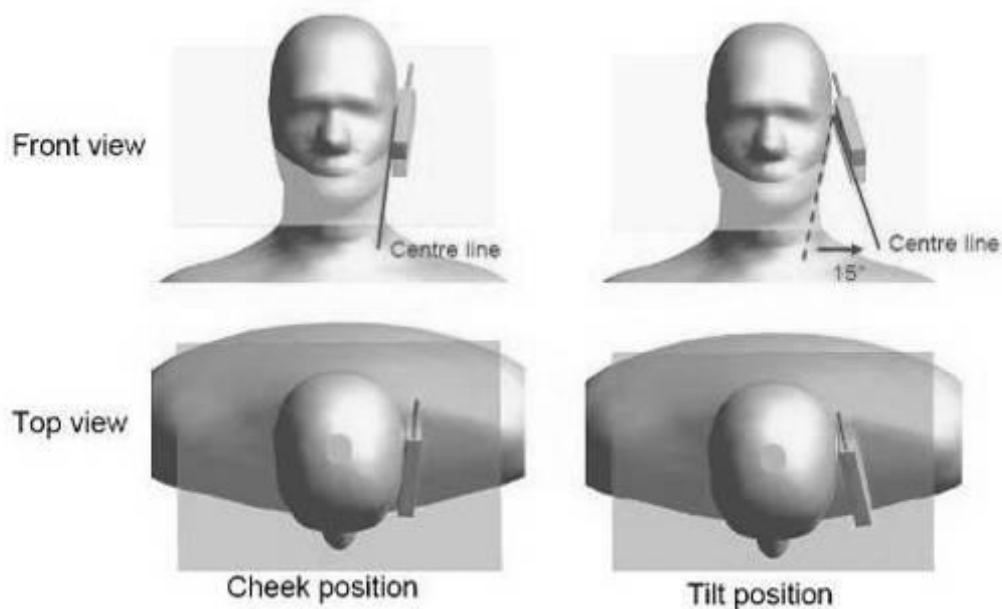

F-2. “Cheek” and “tilt” positions of the mobile phone on the left side



4.2. Body Exposure Condition


4.2.1. Body-worn accessory exposure conditions

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations.

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration. Per FCC KDB Publication 648474 D04, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

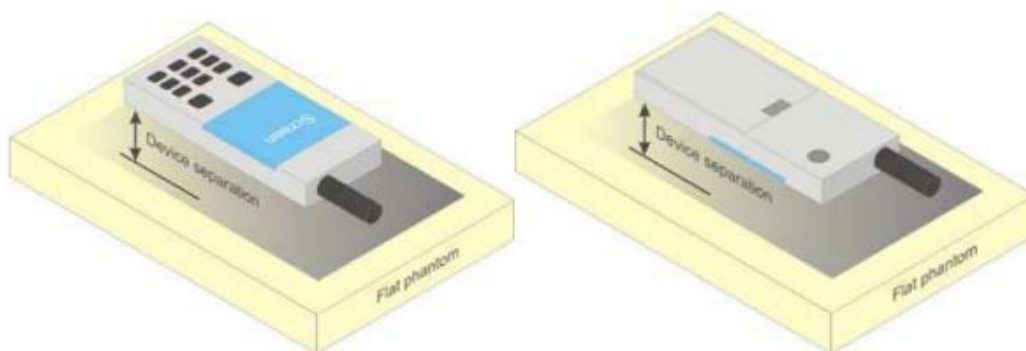

F-1. Test positions for body-worn devices





4.2.2. Wireless Router exposure conditions

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. For devices with form factors smaller than 9 cm x 5 cm, a test separation distance of 5 mm is required.

4.3. Extremity exposure conditions

Per FCC KDB 648474D04, for smart phones with a display diagonal dimension $> 15.0 \text{ cm}$ or an overall diagonal dimension $> 16.0 \text{ cm}$ that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, the device is marketed as "Phablet".

The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at $\leq 25 \text{ mm}$ from that surface or edge, in direct contact with a flat phantom, for Product Specific 10-g SAR according to the body-equivalent tissue dielectric parameters in IEC/IEEE 62209-1528 to address interactive hand use exposure conditions. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR $> 1.2 \text{ W/kg}$; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.

Due to the SAR result, the Main antenna frequency bands are not required to test with 0mm for the Product Specific 10 g SAR.

5. SAR System Verification Procedure

5.1. Tissue Simulate Liquid

5.1.1. Recipes for Tissue Simulate Liquid

The following tables give the recipes for tissue simulating liquids to be used in different frequency bands:

Ingredients (% by weight)	Frequency (MHz)				
	450	700-900	1750-2000	2300-2500	2500-2700
Water	38.56	40.30	55.24	55.00	54.92
Salt (NaCl)	3.95	1.38	0.31	0.2	0.23
Sucrose	56.32	57.90	0	0	0
HEC	0.98	0.24	0	0	0
Bactericide	0.19	0.18	0	0	0
Tween	0	0	44.45	44.80	44.85
Salt: 99 ⁺ % Pure Sodium Chloride			Sucrose: 98 ⁺ % Pure Sucrose		
Water: De-ionized, 16 MΩ ⁺ resistivity			HEC: Hydroxyethyl Cellulose		
Tween: Polyoxyethylene (20) sorbitan monolaurate					
HSL5GHz is composed of the following ingredients:					
Water: 50-65%					
Mineral oil: 10-30%					
Emulsifiers: 8-25%					
Sodium salt: 0-1.5%					

Table 2: Recipe of Tissue Simulate Liquid





5.1.2. Measurement for Tissue Simulate Liquid

The dielectric properties for this Tissue Simulate Liquids were measured by using the DAKS. The Conductivity (σ) and Permittivity (ρ) are listed in bellow table. For the SAR measurement given in this report. The temperature variation of the Tissue Simulate Liquids was $22\pm2^{\circ}\text{C}$.


Tissue Type	Measured Frequency (MHz)	Target Tissue ($\pm 5\%$)		Measured Tissue		Liquid Temp. ($^{\circ}\text{C}$)	Measured Date
		ϵ_r	$\sigma(\text{S/m})$	ϵ_r	$\sigma(\text{S/m})$		
835 Head	835	41.5 (39.43~43.58)	0.9 (0.86~0.95)	42.625	0.914	22.6	November 06, 2024
1750 Head	1750	40.1 (38.10~42.11)	1.37 (1.30~1.44)	40.971	1.378	22.2	November 07, 2024
1900 Head	1900	40 (38.00~42.00)	1.4 (1.33~1.47)	39.698	1.435	22.7	November 11, 2024
2450 Head	2450	39.2 (37.24~41.16)	1.8 (1.71~1.89)	39.441	1.832	22.4	November 13, 2024
2600 Head	2600	39 (37.05~40.95)	1.96 (1.86~2.06)	39.528	1.968	22.5	November 15, 2024
5250 Head	5250	36.0 (34.20~37.80)	4.66 (4.43~4.89)	35.224	4.695	22.6	November 18, 2024
5750 Head	5750	35.3 (33.54~37.07)	5.27 (5.01~5.53)	35.487	5.425	22.6	November 18, 2024

Table 3: Measurement result of Tissue electric parameters



5.2. SAR System Check

The microwave circuit arrangement for system Check is sketched in F-1. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR values. The tests were conducted on the same days as the measurement of the EUT. The obtained results from the system accuracy verification are displayed in the following table (A power level of 250mW (below 3GHz) or 100mW (3-6GHz) was input to the dipole antenna). During the tests, the ambient temperature of the laboratory was in the range $22\pm 2^{\circ}\text{C}$, the relative humidity was in the range 60% and the liquid depth above the ear reference points was above 15 ± 0.5 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

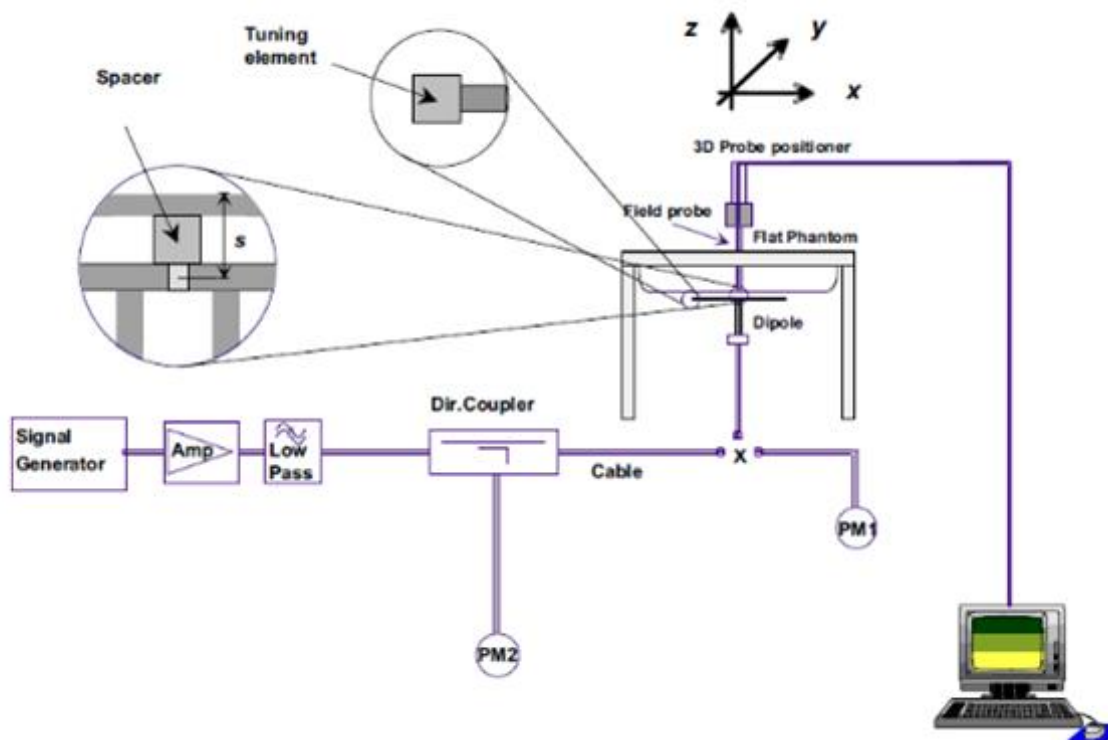

F-1. the microwave circuit arrangement used for SAR system check

5.2.1. Justification for Extended SAR Dipole Calibrations

1) Referring to KDB865664 D01 requirements for dipole calibration, instead of the typical annual calibration recommended by measurement standards, longer calibration intervals of up to three years may be considered when it is demonstrated that the SAR target, impedance and return loss of a dipole have remain stable according to the following requirements. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

- There is no physical damage on the dipole;
- System check with specific dipole is within 10% of calibrated value;
- Return-loss is within 20% of calibrated measurement;
- Impedance is within 5Ω from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

D835V2 SN 4d124 Extend Dipole Calibrations

Date of Measurement	Return-Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)
2023-10-24	-35.6		50.2		1.65	
2023-10-23	-35.56	-0.11	49.8	-0.4	1.64	0.01

D1750V2 SN 1035 Extend Dipole Calibrations

Date of Measurement	Return-Loss (dB)	Delta (%)	Real Impedance	Delta (ohm)	Imaginary Impedance	Delta (ohm)
---------------------	------------------	-----------	----------------	-------------	---------------------	-------------





			(ohm)		(ohm)	
2023-06-12	-38.3		48.8		-0.06	
2024-06-11	-38.54	0.63	48.5	-0.3	-0.04	0.02

D1900V2 SN 5d055 Extend Dipole Calibrations

Date of Measurement	Return-Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)
2023-10-20	-26.1		51.3		4.84	
2024-10-19	-26.0	-0.38	51.5	0.2	4.85	0.01

D2450V2 SN 808 Extend Dipole Calibrations

Date of Measurement	Return-Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)
2023-10-23	-26.3		51.4		4.73	
2024-10-22	-26.27	-0.11	51.2	-0.2	4.70	-0.03

D2600V2 SN 1071 Extend Dipole Calibrations

Date of Measurement	Return-Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)
2023-06-20	-23.7		48.6		-6.32	
2024-06-19	-23.68	-0.08	48.5	-0.1	-6.30	0.02

D5GHzV2 SN 1046 Extend Dipole Calibrations(5250MHz)

Date of Measurement	Return-Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)
2023-10-23	-28.6		49.9		3.71	
2024-10-22	-28.5	-0.35	49.6	-0.3	3.70	-0.01

D5GHzV2 SN 1046 Extend Dipole Calibrations(5750MHz)

Date of Measurement	Return-Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)
2023-10-23	-26.8		54.6		1.18	
2024-10-22	-26.74	-0.22	54.9	0.3	1.20	0.02





5.2.2. Summary System Check Result(s)

Validation Kit		Measured SAR 250mW	Measured SAR 250mW	Measured SAR (normalized to 1W)	Measured SAR (normalized to 1W)	Target SAR (normalized to 1W) (±10%)	Target SAR (normalized to 1W) (±10%)	Liquid Temp. (°C)	Measured Date
		1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)		
D835V2	Head	2.56	1.62	10.24	6.48	9.59 (8.63~10.55)	6.37 (5.73~7.01)	22.6	November 06, 2024
D1750V2	Head	9.05	4.54	36.20	18.16	35.9 (32.31~39.49)	18.9 (17.01~20.79)	22.2	November 07, 2024
D1900V2	Head	10.11	5.18	40.44	20.72	40.2 (36.18~44.22)	20.9 (18.81~22.99)	22.7	November 11, 2024
D2450V2	Head	13.54	6.21	54.16	24.84	53.5 (48.15~58.85)	24.8 (22.32~27.28)	22.4	November 13, 2024
D2600V2	Head	14.45	6.25	57.80	25.00	56.80 (51.12~62.48)	25.5 (22.95~28.05)	22.5	November 15, 2024
Validation Kit		Measured SAR 100mW	Measured SAR 100mW	Measured SAR (normalized to 1W)	Measured SAR (normalized to 1W)	Target SAR (normalized to 1W) (±10%)	Target SAR (normalized to 1W) (±10%)	Liquid Temp. (°C)	Measured Date
		1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)		
D5GHzV2	Head (5.25GHz)	7.66	2.21	76.60	22.10	78.1 (70.29~85.91)	22.2 (19.98~24.42)	22.6	November 18, 2024
	Head (5.75GHz)	7.78	2.12	77.80	21.20	77.4 (69.66~85.14)	21.6 (19.44~23.76)	22.6	November 18, 2024

Table 4: Please see the Appendix A





6. SAR measurement procedure

The measurement procedures are as follows:

6.1. Conducted power measurement

- For WWAN power measurement, use base station simulator connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- Read the WWAN RF power level from the base station simulator.
- For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously Transmission, at maximum RF power in each supported wireless interface and frequency band.
- Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power.

6.2. GSM Test Configuration

SAR tests for GSM 850 and GSM 1900, a communication link is set up with a System Simulator (SS) by air link. Using CMU200 the power level is set to "5" for GSM 850, set to "0" for GSM 1900. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslots is 4. the EGPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslots is 4.

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. GSM voice and GPRS data use GMSK, which is a constant amplitude modulation with minimal peak to average power difference within the time-slot burst. For EDGE, GMSK is used for MCS 1 – MCS 4 and 8-PSK is used for MCS 5 – MCS 9; where 8-PSK has an inherently higher peak-to-average power ratio. The GMSK and 8-PSK EDGE configurations are considered separately for SAR compliance. The GMSK EDGE configurations are grouped with GPRS and considered with respect to time-averaged maximum output power to determine compliance. The 3G SAR test reduction procedure is applied to 8-PSK EDGE with GMSK GPRS/EDGE as the primary mode.

6.3. UMTS Test Configuration

3G SAR Test Reduction Procedure

In the following procedures, the mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.³ This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as "otherwise" in the applicable procedures; SAR measurement is required for the secondary mode.

Output power Verification

Maximum output power is verified on the high, middle and low channels according to procedures described in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all "1's" for WCDMA/HSDPA or by applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCH, DPDCH and spreading codes, HSDPA, HSPA) are required in the SAR report. All configurations that are not supported by the handset or cannot be measured due to technical or equipment limitations must be clearly identified.

Head SAR

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode.





Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

1) Body-Worn Accessory SAR

SAR for body-worn accessory configurations is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCHn, for the highest reported body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When more than 2 DPDCHn are supported by the handset, it may be necessary to configure additional DPDCHn using FTM (Factory Test Mode) or other chipset based test approaches with parameters similar to those used in 384 kbps and 768 kbps RMC.

2) Handsets with Release 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body-worn accessory configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSDPA using the HSDPA body SAR procedures in the "Release 5 HSDPA Data Devices" section of this document, for the highest reported SAR body-worn accessory exposure configuration in 12.2 kbps RMC. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

HSDPA should be configured according to the UE category of a test device. The number of HSDSCH/ HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors (β_c , β_d), and HS-DPCCH power offset parameters (Δ_{ACK} , Δ_{NACK} , Δ_{CQI}) should be set according to values indicated in the Table below. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set

Table 2: Subtests for UMTS Release 5 HSDPA

Sub-set	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (note 1, note 2)	CM(dB) (note 3)	MPR(dB)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (note 4)	15/15 (note 4)	64	12/15 (note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \left(\frac{A_{hs}}{\beta_{hs}/\beta_c} = 30/15 \right) \Rightarrow \beta_{hs} = 30/15 * \beta_c$
Note2: CM=1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$.
Note3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TFC1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

HSUPA Test Configuration

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body-worn accessory configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures in the "Release 6 HSPA Data Devices" section of this document, for the highest reported body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When VOIP is applicable for next to the ear head exposure in HSPA, the 3G SAR test reduction procedure is applied to HSPA with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body-worn accessory measurements is tested for next to the ear head exposure.

Due to inner loop power control requirements in HSPA, a communication test set is required for output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSPA are configured according to the β values indicated in Table 2 and other applicable procedures described in the 'WCDMA Handset' and 'Release 5 HSDPA Data Devices' sections of this document

Table 3: Sub-Test 5 Setup for Release 6 HSUPA



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



Sub-set	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} 47/15 β_{ed2} 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Figure 5.1g.

Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.

6.4. LTE Test Configuration

QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel.8 When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

QPSK with 50% RB allocation

The procedures required for 1 RB allocation in section 4.2.1 are applied to measure the SAR for QPSK with 50% RB allocation.9

QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in sections 4.2.1 and 4.2.2 are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

6.5. WIFI Test Configuration

The SAR measurement and test reduction procedures are structured according to either the DSSS or OFDM transmission mode configurations used in each standalone frequency band and aggregated band. For devices that operate in exposure configurations that require multiple test positions, additional SAR test reduction may be applied. The maximum output power specified for production units, including tune-up tolerance, are used to determine initial SAR test requirements for the 802.11 transmission modes in a frequency band. SAR is measured using the highest measured maximum output power channel for the initial test configuration. SAR measurement and test reduction for the remaining 802.11 modes and test channels are determined according to measured or specified maximum output power and reported SAR of the initial measurements. The general test reduction and SAR measurement approaches are summarized in the following:

1. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures.
2. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, an "initial test configuration" is first determined for each standalone and aggregated frequency band according to the maximum output power and tune-up tolerance specified for production units.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



- a. When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.
 - b. SAR is measured for OFDM configurations using the initial test configuration procedures. Additional frequency band specific SAR test reduction may be considered for individual frequency bands
 - c. Depending on the reported SAR of the highest maximum output power channel tested in the initial test configuration, SAR test reduction may apply to subsequent highest output channels in the initial test configuration to reduce the number of SAR measurements.
3. The Initial test configuration does not apply to DSSS. The 2.4 GHz band SAR test requirements and 802.11b DSSS procedures are used to establish the transmission configurations required for SAR measurement.
4. An "initial test position" is applied to further reduce the number of SAR tests for devices operating in next to the ear, UMPC mini-tablet or hotspot mode exposure configurations that require multiple test positions .
- a. SAR is measured for 802.11b according to the 2.4 GHz DSSS procedure using the exposure condition established by the initial test position.
 - b. SAR is measured for 2.4 GHz and 5 GHz OFDM configurations using the initial test configuration. 802.11b/g/n operating modes are tested independently according to the service requirements in each frequency band. 802.11b/g/n modes are tested on the maximum average output channel.
5. The Initial test position does not apply to devices that require a fixed exposure test position. SAR is measured in a fixed exposure test position for these devices in 802.11b according to the 2.4 GHz DSSS procedure or in 2.4 GHz and 5 GHz OFDM configurations using the initial test configuration procedures .
6. The "subsequent test configuration" procedures are applied to determine if additional SAR measurements are required for the remaining OFDM transmission modes that have not been tested in the initial test configuration. SAR test exclusion is determined according to reported SAR in the initial test configuration and maximum output power specified or measured for these other OFDM configurations.

2.4 GHz and 5GHz SAR Procedures

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions. When SAR measurement is required for an OFDM configuration, the initial test configuration, subsequent test configuration and initial test position procedures are applied. The SAR test exclusion requirements for 802.11g/n OFDM configurations are described in section 5.2.2.

1. 802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- a. When the reported SAR of the highest measured maximum output power channel (section 3.1) for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- b. When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

1. 2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3). SAR is not required for the following 2.4 GHz OFDM conditions.

- a. When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration
- b. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

2. SAR Test Requirements for OFDM Configurations

When SAR measurement is required for 802.11 a/g/n/ac OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. When the same transmitter and antenna(s) are used for U-NII-1 and U-NII-2A bands, additional SAR test reduction applies. When band gap channels between U-NII-2C band and 5.8 GHz U-NII-3 or §15.247 band are supported, the highest maximum output power transmission mode configuration and maximum output power channel across the bands must be used to determine SAR test reduction, according to the initial test configuration and subsequent test configuration requirements.20 In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

3. OFDM Transmission Mode SAR Test Configuration and Channel Selection Requirements





The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures (section 4). When multiple configurations in a frequency band have the same specified maximum output power, the initial test configuration is determined according to the following steps applied sequentially.

- The largest channel bandwidth configuration is selected among the multiple configurations with the same specified maximum output power.
- If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.
- If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.
- When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n.

After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following. These channel selection procedures apply to both the initial test configuration and subsequent test configuration(s), with respect to the default power measurement procedures or additional power measurements required for further SAR test reduction. The same procedures also apply to subsequent highest output power channel(s) selection.

- Channels with measured maximum output power within $\frac{1}{4}$ dB of each other are considered to have the same maximum output.
- When there are multiple test channels with the same measured maximum output power, the channel closest to mid-band frequency is selected for SAR measurement.
- When there are multiple test channels with the same measured maximum output power and equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

Initial Test Configuration Procedures

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required (see section 5.3.2). SAR test reduction of subsequent highest output test channels is based on the reported SAR of the initial test configuration. For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode.²³ For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration. When the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

4. Subsequent Test Configuration Procedures

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units. The initial test position procedure is applied to next to the ear, UMPC mini-tablet and hotspot mode configurations. When the same maximum output power is specified for multiple transmission modes, the procedures in section 5.3.2 are applied to determine the test configuration. Additional power measurements may be required to determine if SAR measurements are required for subsequent highest output power channels in a subsequent test configuration. The subsequent test configuration and SAR measurement procedures are described in the following.

- When SAR test exclusion provisions of KDB Publication 447498 are applicable and SAR measurement is not required for the initial test configuration, SAR is also not required for the next highest maximum output power transmission mode subsequent test configuration(s) in that frequency band or aggregated band and exposure configuration.
- When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration.
- The number of channels in the initial test configuration and subsequent test configuration can be different due to differences in channel bandwidth. When SAR measurement is required for a subsequent test configuration





and the channel bandwidth is smaller than that in the initial test configuration, all channels in the subsequent test configuration that overlap with the larger bandwidth channel tested in the initial test configuration should be used to determine the highest maximum output power channel. This step requires additional power measurement to identify the highest maximum output power channel in the subsequent test configuration to determine SAR test reduction.

- 1). SAR should first be measured for the channel with highest measured output power in the subsequent test configuration.
- 2). SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the reported SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is > 1.2 W/kg or until all required channels are tested.
 - a) For channels with the same measured maximum output power, SAR should be measured using the channel closest to the center frequency of the larger channel bandwidth channel in the initial test configuration.
 - d. SAR measurements for the remaining highest specified maximum output power OFDM transmission mode configurations that have not been tested in the initial test configuration (highest maximum output) or subsequent test configuration(s) (subsequent next highest maximum output power) is determined by applying the subsequent test configuration procedures in this section to the remaining configurations according to the following:
 - 1) replace "subsequent test configuration" with "next subsequent test configuration" (i.e., subsequent next highest specified maximum output power configuration)
 - 2) replace "initial test configuration" with "all tested higher output power configurations."

6.6. Power Reduction

The product without any power reduction.

6.7. Power Drift

To control the output power stability during the SAR test, SAR system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. This ensures that the power drift during one measurement is within ± 0.2 dB.

7. TEST CONDITIONS AND RESULTS

7.1. Conducted Power Results

According KDB 447498 D01 General RF Exposure Guidance v06 Section 4.1 2) states that "Unless it is specified differently in the published RF exposure KDB procedures, these requirements also apply to test reduction and test exclusion considerations. Time-averaged maximum conducted output power applies to SAR and, as required by § 2.1091(c), time-averaged ERP applies to MPE. When an antenna port is not available on the device to support conducted power measurement, such as FRS and certain Part 15 transmitters with built-in integral antennas, the maximum output power allowed for production units should be used to determine RF exposure test exclusion and compliance."

<GSM Conducted Power>

General Note:

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. According to October 2013TCB Workshop, for GSM / GPRS / EGPRS, the number of time slots to test for SAR should correspond to the highest frame-average maximum output power configuration, considering the possibility of e.g. 3rd party VoIP operation for head and body-worn SAR testing, the EUT was set in GPRS (3Tx slot) for GSM850/GSM1900 band due to their highest frame-average power.
3. For hotspot mode SAR testing, GPRS should be evaluated, therefore the EUT was set in GPRS (3 Tx slots) for GSM850/GSM1900 band due to its highest frame-average power.



**7.1.1. Conducted power measurement results for GSM850**

GSM 850										
Burst Output Power(dBm)					Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
Channel		128	190	251			128	190	251	
GSM(GMSK)	GSM	33.08	33.13	32.90	33.50	-9.19	23.89	23.94	23.71	24.31
GPRS(GMSK)	1 TX Slot	33.10	33.06	32.83	33.50	-9.19	23.91	23.87	23.64	24.31
	2 TX Slots	32.32	32.32	32.11	32.50	-6.18	26.14	26.14	25.93	26.32
	3 TX Slots	30.52	30.56	30.34	31.00	-4.42	26.10	26.14	25.92	26.58
	4 TX Slots	29.41	29.44	29.23	29.50	-3.17	26.24	26.27	26.06	26.33
EGPRS(8PSK)	1 TX Slot	25.60	25.34	25.41	26.00	-9.19	16.41	16.15	16.22	16.81
	2 TX Slots	24.27	24.19	24.15	24.50	-6.18	18.09	18.01	17.97	18.32
	3 TX Slots	21.62	21.74	21.57	22.00	-4.42	17.20	17.32	17.15	17.58
	4 TX Slots	20.00	20.32	20.45	21.50	-3.17	16.83	17.15	17.28	18.33

7.1.2. Conducted power measurement results for PCS1900

GSM 1900										
Burst Output Power(dBm)					Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
Channel		512	661	810			512	661	810	
GSM(GMSK)	GSM	28.39	28.76	28.48	29.00	-9.19	19.20	19.57	19.29	19.81
GPRS(GMSK)	1 TX Slot	28.31	28.63	28.18	29.00	-9.19	19.12	19.44	18.99	19.81
	2 TX Slots	27.52	27.9	27.48	28.00	-6.18	21.34	21.72	21.30	21.82
	3 TX Slots	25.48	25.93	25.38	26.00	-4.42	21.06	21.51	20.96	21.58
	4 TX Slots	24.25	24.4	23.86	24.50	-3.17	21.08	21.23	20.69	21.33
EGPRS(8PSK)	1 TX Slot	24.92	24.9	24.62	25.00	-9.19	15.73	15.71	15.43	15.81
	2 TX Slots	23.89	23.81	23.51	24.00	-6.18	17.71	17.63	17.33	17.82
	3 TX Slots	21.63	21.39	21.23	22.00	-4.42	17.21	16.97	16.81	17.58
	4 TX Slots	20.59	20.16	20.2	21.00	-3.17	17.42	16.99	17.03	17.83

Note:

1)CMW500 measures GSM peak and average output power for active timeslots. For SAR the time based average power is relevant. The difference in between depends on the duty cycle of the TDMA signal:

No. of timeslots	1	2	3	4
Duty Cycle	1:8.3	1:4.15	1:2.77	1:2.075
Time based avg. power compared to slotted avg. power	-9.19	-6.18	-4.42	-3.17

2)The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum burst-averaged power based on time slots. The calculated method is shown as below:

3)Frame-averaged power = $10 \times \log (\text{Burst-averaged power mW} \times \text{Slot used} / 8)$

When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used

When multiple slots can be used, SAR should be tested to account for the maximum source-based time-averaged output power.





<UMTS Conducted Power>

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- The EUT was connected to Base Station CMW500 referred to the Setup Configuration.
- The RF path losses were compensated into the measurements.
- A call was established between EUT and Base Station with following setting:
 - Set Gain Factors (β_c and β_d) and parameters were set according to each
 - Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - Set RMC 12.2Kbps + HSDPA mode.
 - Set Cell Power = -86 dBm
 - Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - Select HSDPA Uplink Parameters
 - Set Delta ACK, Delta NACK and Delta CQI = 8
 - Set Ack-Nack Repetition Factor to 3
 - Set CQI Feedback Cycle (k) to 4 ms
 - Set CQI Repetition Factor to 2
 - Power Ctrl Mode = All Up bits
- The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5
Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$. Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$. Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases. Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.							

Setup Configuration

HSUPA Setup Configuration:

- The EUT was connected to Base Station R&S CMW500 referred to the Setup Configuration.
- The RF path losses were compensated into the measurements.
- A call was established between EUT and Base Station with following setting * :
 - Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - Set Cell Power = -86 dBm
 - Set Channel Type = 12.2k + HSPA
 - Set UE Target Power
 - Power Ctrl Mode= Alternating bits
 - Set and observe the E-TFCI
 - Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- The transmitted maximum output power was recorded.



Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81
Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference. Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$. Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$. Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g. Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.													

General Note

1. Per KDB 941225 D01, RMC 12.2kbps setting is used to evaluate SAR. If AMR 12.2kbps power is < 0.25dB higher than RMC 12.2kbps, SAR tests with AMR 12.2kbps can be excluded.
2. By design, AMR and HSDPA/HSUPA RF power will not be larger than RMC 12.2kbps, detailed information is included in Tune-up Procure exhibit.
3. It is expected by the manufacturer that MPR for some HSDPA/HSUPA subtests may differ from the specification of 3GPP, according to the chipset implementation in this model. The implementation and expected deviation are detailed in tune-up procedure exhibit.



**7.1.3. Conducted Power Measurement Results(WCDMA Band II)**

Item	Band	WCDMA Band II result (dBm)			
		Channel/Frequency(MHz)			
	sub-test	9262/1852.4	9400/1880	9538/1907.6	Tune up
RMC	12.2kbps RMC	21.87	21.89	22.24	22.50
HSDPA	Sub –Test 1	20.89	20.91	21.24	21.50
	Sub –Test 2	20.38	20.37	20.74	21.00
	Sub –Test 3	20.41	20.41	20.76	21.00
	Sub –Test 4	20.37	20.37	20.74	21.00
HSUPA	Sub –Test 1	18.87	18.87	19.20	19.50
	Sub –Test 2	18.86	18.86	19.21	19.50
	Sub –Test 3	18.86	18.87	19.22	19.50
	Sub –Test 4	18.37	18.37	18.72	19.00
	Sub –Test 5	19.86	19.83	20.17	20.50

Note:

- 1) when the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.

7.1.4. Conducted Power Measurement Results(WCDMA Band IV)

Item	Band	WCDMA Band IV result (dBm)			
		Channel/Frequency(MHz)			
	sub-test	1312/1712.4	1413/1732.6	1513/1752.6	Tune up
RMC	12.2kbps RMC	20.88	21.20	20.70	22.50
HSDPA	Sub –Test 1	21.12	22.14	20.94	22.50
	Sub –Test 2	21.15	22.14	21.06	22.50
	Sub –Test 3	21.12	22.10	21.03	22.50
	Sub –Test 4	21.14	22.11	21.03	22.50
HSUPA	Sub –Test 1	20.55	21.72	20.45	22.00
	Sub –Test 2	20.83	21.70	20.75	22.00
	Sub –Test 3	21.23	21.73	20.73	22.00
	Sub –Test 4	21.36	21.96	21.03	22.00
	Sub –Test 5	21.24	22.17	21.07	22.50

Note:

- 2) when the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.

7.1.5. Conducted Power Measurement Results(WCDMA Band V)

Item	Band	WCDMA Band V result (dBm)			
		Channel/Frequency(MHz)			
	sub-test	4132/826.4	4182/836.4	4233/846.6	Tune up
RMC	12.2kbps RMC	23.57	23.57	23.46	24.00
HSDPA	Sub –Test 1	21.57	22.25	21.57	22.50
	Sub –Test 2	21.53	22.21	21.53	22.50
	Sub –Test 3	21.02	21.64	20.98	22.00
	Sub –Test 4	21.03	21.69	21.00	22.00
HSUPA	Sub –Test 1	20.07	20.30	19.75	20.50
	Sub –Test 2	20.54	20.71	20.17	21.00
	Sub –Test 3	20.08	20.61	20.12	21.00
	Sub –Test 4	19.65	20.44	19.94	20.50
	Sub –Test 5	21.86	22.55	21.84	23.00

Note:

- 3) when the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.



**7.1.6. Conducted Power Measurement Results(LTE Band 2)**

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Tune Up (dBm)
Band2	1.4MHz	QPSK	18607	1RB#0	21.26	22.00
Band2	1.4MHz	QPSK	18607	1RB#2	21.28	22.00
Band2	1.4MHz	QPSK	18607	1RB#5	21.27	22.00
Band2	1.4MHz	QPSK	18607	3RB#0	21.36	22.00
Band2	1.4MHz	QPSK	18607	3RB#1	21.33	22.00
Band2	1.4MHz	QPSK	18607	3RB#3	21.31	22.00
Band2	1.4MHz	QPSK	18607	6RB#0	20.85	21.00
Band2	1.4MHz	16QAM	18607	1RB#0	21.75	22.00
Band2	1.4MHz	16QAM	18607	1RB#2	21.82	22.00
Band2	1.4MHz	16QAM	18607	1RB#5	21.79	22.00
Band2	1.4MHz	16QAM	18607	3RB#0	20.50	21.00
Band2	1.4MHz	16QAM	18607	3RB#1	20.57	21.00
Band2	1.4MHz	16QAM	18607	3RB#3	20.50	21.00
Band2	1.4MHz	16QAM	18607	6RB#0	19.88	20.00
Band2	1.4MHz	QPSK	18900	1RB#0	21.24	22.00
Band2	1.4MHz	QPSK	18900	1RB#2	21.15	22.00
Band2	1.4MHz	QPSK	18900	1RB#5	21.19	22.00
Band2	1.4MHz	QPSK	18900	3RB#0	21.23	22.00
Band2	1.4MHz	QPSK	18900	3RB#1	21.26	22.00
Band2	1.4MHz	QPSK	18900	3RB#3	21.16	22.00
Band2	1.4MHz	QPSK	18900	6RB#0	20.71	21.00
Band2	1.4MHz	16QAM	18900	1RB#0	21.74	22.00
Band2	1.4MHz	16QAM	18900	1RB#2	21.52	22.00
Band2	1.4MHz	16QAM	18900	1RB#5	21.58	22.00
Band2	1.4MHz	16QAM	18900	3RB#0	20.40	21.00
Band2	1.4MHz	16QAM	18900	3RB#1	20.45	21.00
Band2	1.4MHz	16QAM	18900	3RB#3	20.51	21.00
Band2	1.4MHz	16QAM	18900	6RB#0	20.03	21.00
Band2	1.4MHz	QPSK	19193	1RB#0	21.22	22.00
Band2	1.4MHz	QPSK	19193	1RB#2	21.25	22.00
Band2	1.4MHz	QPSK	19193	1RB#5	21.26	22.00
Band2	1.4MHz	QPSK	19193	3RB#0	21.05	22.00
Band2	1.4MHz	QPSK	19193	3RB#1	21.07	22.00
Band2	1.4MHz	QPSK	19193	3RB#3	21.16	22.00
Band2	1.4MHz	QPSK	19193	6RB#0	20.64	21.00
Band2	1.4MHz	16QAM	19193	1RB#0	20.98	21.00
Band2	1.4MHz	16QAM	19193	1RB#2	21.10	22.00
Band2	1.4MHz	16QAM	19193	1RB#5	20.98	21.00
Band2	1.4MHz	16QAM	19193	3RB#0	20.28	21.00
Band2	1.4MHz	16QAM	19193	3RB#1	20.32	21.00
Band2	1.4MHz	16QAM	19193	3RB#3	20.34	21.00
Band2	1.4MHz	16QAM	19193	6RB#0	19.66	20.00
Band2	3MHz	QPSK	18615	1RB#0	21.23	22.00
Band2	3MHz	QPSK	18615	1RB#8	21.35	22.00
Band2	3MHz	QPSK	18615	1RB#14	21.37	22.00
Band2	3MHz	QPSK	18615	8RB#0	20.79	21.00
Band2	3MHz	QPSK	18615	8RB#4	20.80	21.00
Band2	3MHz	QPSK	18615	8RB#7	20.87	21.00
Band2	3MHz	QPSK	18615	15RB#0	20.90	21.00
Band2	3MHz	16QAM	18615	1RB#0	20.70	21.00
Band2	3MHz	16QAM	18615	1RB#8	20.68	21.00
Band2	3MHz	16QAM	18615	1RB#14	20.75	21.00
Band2	3MHz	16QAM	18615	8RB#0	20.07	21.00
Band2	3MHz	16QAM	18615	8RB#4	20.07	21.00
Band2	3MHz	16QAM	18615	8RB#7	20.12	21.00
Band2	3MHz	16QAM	18615	15RB#0	19.79	20.00
Band2	3MHz	QPSK	18900	1RB#0	21.10	22.00
Band2	3MHz	QPSK	18900	1RB#8	21.11	22.00
Band2	3MHz	QPSK	18900	1RB#14	21.13	22.00
Band2	3MHz	QPSK	18900	8RB#0	20.76	21.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band2	3MHz	QPSK	18900	8RB#4	20.77	21.00
Band2	3MHz	QPSK	18900	8RB#7	20.72	21.00
Band2	3MHz	QPSK	18900	15RB#0	20.61	21.00
Band2	3MHz	16QAM	18900	1RB#0	20.63	21.00
Band2	3MHz	16QAM	18900	1RB#8	20.47	21.00
Band2	3MHz	16QAM	18900	1RB#14	20.48	21.00
Band2	3MHz	16QAM	18900	8RB#0	20.01	21.00
Band2	3MHz	16QAM	18900	8RB#4	19.84	20.00
Band2	3MHz	16QAM	18900	8RB#7	20.13	21.00
Band2	3MHz	16QAM	18900	15RB#0	19.80	20.00
Band2	3MHz	QPSK	19185	1RB#0	21.11	22.00
Band2	3MHz	QPSK	19185	1RB#8	21.09	22.00
Band2	3MHz	QPSK	19185	1RB#14	20.97	21.00
Band2	3MHz	QPSK	19185	8RB#0	20.64	21.00
Band2	3MHz	QPSK	19185	8RB#4	20.66	21.00
Band2	3MHz	QPSK	19185	8RB#7	20.62	21.00
Band2	3MHz	QPSK	19185	15RB#0	20.61	21.00
Band2	3MHz	16QAM	19185	1RB#0	20.66	21.00
Band2	3MHz	16QAM	19185	1RB#8	20.32	21.00
Band2	3MHz	16QAM	19185	1RB#14	20.33	21.00
Band2	3MHz	16QAM	19185	8RB#0	19.81	20.00
Band2	3MHz	16QAM	19185	8RB#4	19.94	20.00
Band2	3MHz	16QAM	19185	8RB#7	19.76	20.00
Band2	3MHz	16QAM	19185	15RB#0	19.62	20.00
Band2	5MHz	QPSK	18625	1RB#0	21.39	22.00
Band2	5MHz	QPSK	18625	1RB#12	21.41	22.00
Band2	5MHz	QPSK	18625	1RB#24	21.39	22.00
Band2	5MHz	QPSK	18625	12RB#0	20.92	21.00
Band2	5MHz	QPSK	18625	12RB#6	20.84	21.00
Band2	5MHz	QPSK	18625	12RB#13	20.98	21.00
Band2	5MHz	QPSK	18625	25RB#0	20.87	21.00
Band2	5MHz	16QAM	18625	1RB#0	20.96	21.00
Band2	5MHz	16QAM	18625	1RB#12	21.07	22.00
Band2	5MHz	16QAM	18625	1RB#24	21.07	22.00
Band2	5MHz	16QAM	18625	12RB#0	19.94	20.00
Band2	5MHz	16QAM	18625	12RB#6	20.04	21.00
Band2	5MHz	16QAM	18625	12RB#13	20.01	21.00
Band2	5MHz	16QAM	18625	25RB#0	19.83	20.00
Band2	5MHz	QPSK	18900	1RB#0	21.29	22.00
Band2	5MHz	QPSK	18900	1RB#12	21.12	22.00
Band2	5MHz	QPSK	18900	1RB#24	21.29	22.00
Band2	5MHz	QPSK	18900	12RB#0	20.66	21.00
Band2	5MHz	QPSK	18900	12RB#6	20.67	21.00
Band2	5MHz	QPSK	18900	12RB#13	20.70	21.00
Band2	5MHz	QPSK	18900	25RB#0	20.63	21.00
Band2	5MHz	16QAM	18900	1RB#0	20.11	21.00
Band2	5MHz	16QAM	18900	1RB#12	20.08	21.00
Band2	5MHz	16QAM	18900	1RB#24	20.31	21.00
Band2	5MHz	16QAM	18900	12RB#0	19.67	20.00
Band2	5MHz	16QAM	18900	12RB#6	19.67	20.00
Band2	5MHz	16QAM	18900	12RB#13	20.09	21.00
Band2	5MHz	16QAM	18900	25RB#0	19.81	20.00
Band2	5MHz	QPSK	19175	1RB#0	21.29	22.00
Band2	5MHz	QPSK	19175	1RB#12	21.11	22.00
Band2	5MHz	QPSK	19175	1RB#24	21.24	22.00
Band2	5MHz	QPSK	19175	12RB#0	20.71	21.00
Band2	5MHz	QPSK	19175	12RB#6	20.67	21.00
Band2	5MHz	QPSK	19175	12RB#13	20.62	21.00
Band2	5MHz	QPSK	19175	25RB#0	20.72	21.00
Band2	5MHz	16QAM	19175	1RB#0	20.18	21.00
Band2	5MHz	16QAM	19175	1RB#12	20.03	21.00
Band2	5MHz	16QAM	19175	1RB#24	19.94	20.00
Band2	5MHz	16QAM	19175	12RB#0	19.76	20.00
Band2	5MHz	16QAM	19175	12RB#6	19.73	20.00
Band2	5MHz	16QAM	19175	12RB#13	19.62	20.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band2	5MHz	16QAM	19175	25RB#0	19.83	20.00
Band2	10MHz	QPSK	18650	1RB#0	21.24	22.00
Band2	10MHz	QPSK	18650	1RB#24	21.35	22.00
Band2	10MHz	QPSK	18650	1RB#49	21.32	22.00
Band2	10MHz	QPSK	18650	25RB#0	20.91	21.00
Band2	10MHz	QPSK	18650	25RB#12	20.86	21.00
Band2	10MHz	QPSK	18650	25RB#25	20.96	21.00
Band2	10MHz	QPSK	18650	50RB#0	20.83	21.00
Band2	10MHz	16QAM	18650	1RB#0	20.70	21.00
Band2	10MHz	16QAM	18650	1RB#24	20.28	21.00
Band2	10MHz	16QAM	18650	1RB#49	20.68	21.00
Band2	10MHz	16QAM	18650	25RB#0	20.04	21.00
Band2	10MHz	16QAM	18650	25RB#12	20.04	21.00
Band2	10MHz	16QAM	18650	25RB#25	19.99	20.00
Band2	10MHz	16QAM	18650	50RB#0	19.91	20.00
Band2	10MHz	QPSK	18900	1RB#0	21.06	22.00
Band2	10MHz	QPSK	18900	1RB#24	21.02	22.00
Band2	10MHz	QPSK	18900	1RB#49	21.25	22.00
Band2	10MHz	QPSK	18900	25RB#0	20.78	21.00
Band2	10MHz	QPSK	18900	25RB#12	20.62	21.00
Band2	10MHz	QPSK	18900	25RB#25	20.83	21.00
Band2	10MHz	QPSK	18900	50RB#0	20.63	21.00
Band2	10MHz	16QAM	18900	1RB#0	20.35	21.00
Band2	10MHz	16QAM	18900	1RB#24	20.34	21.00
Band2	10MHz	16QAM	18900	1RB#49	20.84	21.00
Band2	10MHz	16QAM	18900	25RB#0	19.67	20.00
Band2	10MHz	16QAM	18900	25RB#12	19.67	20.00
Band2	10MHz	16QAM	18900	25RB#25	19.80	20.00
Band2	10MHz	16QAM	18900	50RB#0	19.69	20.00
Band2	10MHz	QPSK	19150	1RB#0	21.27	22.00
Band2	10MHz	QPSK	19150	1RB#24	21.21	22.00
Band2	10MHz	QPSK	19150	1RB#49	20.97	21.00
Band2	10MHz	QPSK	19150	25RB#0	20.79	21.00
Band2	10MHz	QPSK	19150	25RB#12	20.70	21.00
Band2	10MHz	QPSK	19150	25RB#25	20.72	21.00
Band2	10MHz	QPSK	19150	50RB#0	20.71	21.00
Band2	10MHz	16QAM	19150	1RB#0	20.46	21.00
Band2	10MHz	16QAM	19150	1RB#24	20.46	21.00
Band2	10MHz	16QAM	19150	1RB#49	20.31	21.00
Band2	10MHz	16QAM	19150	25RB#0	19.81	20.00
Band2	10MHz	16QAM	19150	25RB#12	19.76	20.00
Band2	10MHz	16QAM	19150	25RB#25	19.66	20.00
Band2	10MHz	16QAM	19150	50RB#0	19.81	20.00
Band2	15MHz	QPSK	18675	1RB#0	21.02	22.00
Band2	15MHz	QPSK	18675	1RB#38	21.33	22.00
Band2	15MHz	QPSK	18675	1RB#74	20.75	21.00
Band2	15MHz	QPSK	18675	38RB#0	20.62	21.00
Band2	15MHz	QPSK	18675	38RB#18	20.59	21.00
Band2	15MHz	QPSK	18675	38RB#37	20.67	21.00
Band2	15MHz	QPSK	18675	75RB#0	20.89	21.00
Band2	15MHz	16QAM	18675	1RB#0	20.65	21.00
Band2	15MHz	16QAM	18675	1RB#38	20.67	21.00
Band2	15MHz	16QAM	18675	1RB#74	20.45	21.00
Band2	15MHz	16QAM	18675	38RB#0	20.63	21.00
Band2	15MHz	16QAM	18675	38RB#18	20.63	21.00
Band2	15MHz	16QAM	18675	38RB#37	20.39	21.00
Band2	15MHz	16QAM	18675	75RB#0	19.93	20.00
Band2	15MHz	QPSK	18900	1RB#0	21.08	22.00
Band2	15MHz	QPSK	18900	1RB#38	21.11	22.00
Band2	15MHz	QPSK	18900	1RB#74	21.31	22.00
Band2	15MHz	QPSK	18900	38RB#0	20.14	21.00
Band2	15MHz	QPSK	18900	38RB#18	20.17	21.00
Band2	15MHz	QPSK	18900	38RB#37	20.89	21.00
Band2	15MHz	QPSK	18900	75RB#0	20.67	21.00
Band2	15MHz	16QAM	18900	1RB#0	20.15	21.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band2	15MHz	16QAM	18900	1RB#38	20.70	21.00
Band2	15MHz	16QAM	18900	1RB#74	20.39	21.00
Band2	15MHz	16QAM	18900	38RB#0	20.17	21.00
Band2	15MHz	16QAM	18900	38RB#18	20.18	21.00
Band2	15MHz	16QAM	18900	38RB#37	20.87	21.00
Band2	15MHz	16QAM	18900	75RB#0	19.63	20.00
Band2	15MHz	QPSK	19125	1RB#0	21.50	22.00
Band2	15MHz	QPSK	19125	1RB#38	21.22	22.00
Band2	15MHz	QPSK	19125	1RB#74	21.08	22.00
Band2	15MHz	QPSK	19125	38RB#0	21.04	22.00
Band2	15MHz	QPSK	19125	38RB#18	20.79	21.00
Band2	15MHz	QPSK	19125	38RB#37	20.37	21.00
Band2	15MHz	QPSK	19125	75RB#0	20.83	21.00
Band2	15MHz	16QAM	19125	1RB#0	20.97	21.00
Band2	15MHz	16QAM	19125	1RB#38	20.54	21.00
Band2	15MHz	16QAM	19125	1RB#74	20.62	21.00
Band2	15MHz	16QAM	19125	38RB#0	21.02	22.00
Band2	15MHz	16QAM	19125	38RB#18	20.50	21.00
Band2	15MHz	16QAM	19125	38RB#37	20.69	21.00
Band2	15MHz	16QAM	19125	75RB#0	19.77	20.00
Band2	20MHz	QPSK	18700	1RB#0	21.32	22.00
Band2	20MHz	QPSK	18700	1RB#49	21.34	22.00
Band2	20MHz	QPSK	18700	1RB#99	21.04	22.00
Band2	20MHz	QPSK	18700	50RB#0	20.88	21.00
Band2	20MHz	QPSK	18700	50RB#25	20.89	21.00
Band2	20MHz	QPSK	18700	50RB#50	20.76	21.00
Band2	20MHz	QPSK	18700	100RB#0	20.83	21.00
Band2	20MHz	16QAM	18700	1RB#0	21.33	22.00
Band2	20MHz	16QAM	18700	1RB#49	21.28	22.00
Band2	20MHz	16QAM	18700	1RB#99	21.00	22.00
Band2	20MHz	16QAM	18700	50RB#0	19.96	20.00
Band2	20MHz	16QAM	18700	50RB#25	19.99	20.00
Band2	20MHz	16QAM	18700	50RB#50	19.64	20.00
Band2	20MHz	16QAM	18700	100RB#0	19.87	20.00
Band2	20MHz	QPSK	18900	1RB#0	21.00	22.00
Band2	20MHz	QPSK	18900	1RB#49	21.17	22.00
Band2	20MHz	QPSK	18900	1RB#99	21.44	22.00
Band2	20MHz	QPSK	18900	50RB#0	20.80	21.00
Band2	20MHz	QPSK	18900	50RB#25	20.79	21.00
Band2	20MHz	QPSK	18900	50RB#50	20.77	21.00
Band2	20MHz	QPSK	18900	100RB#0	20.68	21.00
Band2	20MHz	16QAM	18900	1RB#0	20.68	21.00
Band2	20MHz	16QAM	18900	1RB#49	20.75	21.00
Band2	20MHz	16QAM	18900	1RB#99	21.09	22.00
Band2	20MHz	16QAM	18900	50RB#0	19.80	20.00
Band2	20MHz	16QAM	18900	50RB#25	19.78	20.00
Band2	20MHz	16QAM	18900	50RB#50	20.20	21.00
Band2	20MHz	16QAM	18900	100RB#0	19.82	20.00
Band2	20MHz	QPSK	19100	1RB#0	21.49	22.00
Band2	20MHz	QPSK	19100	1RB#49	21.41	22.00
Band2	20MHz	QPSK	19100	1RB#99	21.04	22.00
Band2	20MHz	QPSK	19100	50RB#0	20.98	21.00
Band2	20MHz	QPSK	19100	50RB#25	21.04	22.00
Band2	20MHz	QPSK	19100	50RB#50	20.75	21.00
Band2	20MHz	QPSK	19100	100RB#0	20.92	21.00
Band2	20MHz	16QAM	19100	1RB#0	21.36	22.00
Band2	20MHz	16QAM	19100	1RB#49	21.31	22.00
Band2	20MHz	16QAM	19100	1RB#99	21.05	22.00
Band2	20MHz	16QAM	19100	50RB#0	20.03	21.00
Band2	20MHz	16QAM	19100	50RB#25	19.97	20.00
Band2	20MHz	16QAM	19100	50RB#50	19.79	20.00
Band2	20MHz	16QAM	19100	100RB#0	19.93	20.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**7.1.7. Conducted Power Measurement Results(LTE Band 4)**

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Tune Up (dBm)
Band4	1.4MHz	QPSK	19957	1RB#0	21.16	22.00
Band4	1.4MHz	QPSK	19957	1RB#2	21.27	22.00
Band4	1.4MHz	QPSK	19957	1RB#5	21.25	22.00
Band4	1.4MHz	QPSK	19957	3RB#0	21.30	22.00
Band4	1.4MHz	QPSK	19957	3RB#1	21.28	22.00
Band4	1.4MHz	QPSK	19957	3RB#3	21.30	22.00
Band4	1.4MHz	QPSK	19957	6RB#0	20.80	21.00
Band4	1.4MHz	16QAM	19957	1RB#0	21.15	22.00
Band4	1.4MHz	16QAM	19957	1RB#2	20.69	21.00
Band4	1.4MHz	16QAM	19957	1RB#5	20.63	21.00
Band4	1.4MHz	16QAM	19957	3RB#0	20.55	21.00
Band4	1.4MHz	16QAM	19957	3RB#1	20.54	21.00
Band4	1.4MHz	16QAM	19957	3RB#3	20.72	21.00
Band4	1.4MHz	16QAM	19957	6RB#0	19.92	20.00
Band4	1.4MHz	QPSK	20175	1RB#0	21.39	22.00
Band4	1.4MHz	QPSK	20175	1RB#2	21.29	22.00
Band4	1.4MHz	QPSK	20175	1RB#5	21.36	22.00
Band4	1.4MHz	QPSK	20175	3RB#0	21.42	22.00
Band4	1.4MHz	QPSK	20175	3RB#1	21.40	22.00
Band4	1.4MHz	QPSK	20175	3RB#3	21.39	22.00
Band4	1.4MHz	QPSK	20175	6RB#0	20.92	21.00
Band4	1.4MHz	16QAM	20175	1RB#0	21.51	22.00
Band4	1.4MHz	16QAM	20175	1RB#2	21.79	22.00
Band4	1.4MHz	16QAM	20175	1RB#5	21.46	22.00
Band4	1.4MHz	16QAM	20175	3RB#0	20.42	21.00
Band4	1.4MHz	16QAM	20175	3RB#1	20.41	21.00
Band4	1.4MHz	16QAM	20175	3RB#3	20.75	21.00
Band4	1.4MHz	16QAM	20175	6RB#0	20.03	21.00
Band4	1.4MHz	QPSK	20393	1RB#0	21.23	22.00
Band4	1.4MHz	QPSK	20393	1RB#2	21.22	22.00
Band4	1.4MHz	QPSK	20393	1RB#5	21.26	22.00
Band4	1.4MHz	QPSK	20393	3RB#0	21.03	22.00
Band4	1.4MHz	QPSK	20393	3RB#1	21.01	22.00
Band4	1.4MHz	QPSK	20393	3RB#3	21.00	22.00
Band4	1.4MHz	QPSK	20393	6RB#0	20.49	21.00
Band4	1.4MHz	16QAM	20393	1RB#0	20.79	21.00
Band4	1.4MHz	16QAM	20393	1RB#2	20.84	21.00
Band4	1.4MHz	16QAM	20393	1RB#5	20.36	21.00
Band4	1.4MHz	16QAM	20393	3RB#0	20.02	21.00
Band4	1.4MHz	16QAM	20393	3RB#1	20.01	21.00
Band4	1.4MHz	16QAM	20393	3RB#3	20.35	21.00
Band4	1.4MHz	16QAM	20393	6RB#0	19.67	20.00
Band4	3MHz	QPSK	19965	1RB#0	21.24	22.00
Band4	3MHz	QPSK	19965	1RB#8	21.24	22.00
Band4	3MHz	QPSK	19965	1RB#14	21.21	22.00
Band4	3MHz	QPSK	19965	8RB#0	20.75	21.00
Band4	3MHz	QPSK	19965	8RB#4	20.73	21.00
Band4	3MHz	QPSK	19965	8RB#7	20.70	21.00
Band4	3MHz	QPSK	19965	15RB#0	20.76	21.00
Band4	3MHz	16QAM	19965	1RB#0	20.62	21.00
Band4	3MHz	16QAM	19965	1RB#8	20.61	21.00
Band4	3MHz	16QAM	19965	1RB#14	20.44	21.00
Band4	3MHz	16QAM	19965	8RB#0	20.05	21.00
Band4	3MHz	16QAM	19965	8RB#4	20.01	21.00
Band4	3MHz	16QAM	19965	8RB#7	19.95	20.00
Band4	3MHz	16QAM	19965	15RB#0	19.66	20.00
Band4	3MHz	QPSK	20175	1RB#0	21.37	22.00
Band4	3MHz	QPSK	20175	1RB#8	21.36	22.00
Band4	3MHz	QPSK	20175	1RB#14	21.39	22.00
Band4	3MHz	QPSK	20175	8RB#0	20.96	21.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band4	3MHz	QPSK	20175	8RB#4	20.97	21.00
Band4	3MHz	QPSK	20175	8RB#7	20.82	21.00
Band4	3MHz	QPSK	20175	15RB#0	20.98	21.00
Band4	3MHz	16QAM	20175	1RB#0	20.90	21.00
Band4	3MHz	16QAM	20175	1RB#8	20.99	21.00
Band4	3MHz	16QAM	20175	1RB#14	20.96	21.00
Band4	3MHz	16QAM	20175	8RB#0	20.17	21.00
Band4	3MHz	16QAM	20175	8RB#4	20.17	21.00
Band4	3MHz	16QAM	20175	8RB#7	20.21	21.00
Band4	3MHz	16QAM	20175	15RB#0	19.95	20.00
Band4	3MHz	QPSK	20385	1RB#0	21.05	22.00
Band4	3MHz	QPSK	20385	1RB#8	21.04	22.00
Band4	3MHz	QPSK	20385	1RB#14	21.05	22.00
Band4	3MHz	QPSK	20385	8RB#0	20.44	21.00
Band4	3MHz	QPSK	20385	8RB#4	20.45	21.00
Band4	3MHz	QPSK	20385	8RB#7	20.52	21.00
Band4	3MHz	QPSK	20385	15RB#0	20.54	21.00
Band4	3MHz	16QAM	20385	1RB#0	20.02	21.00
Band4	3MHz	16QAM	20385	1RB#8	20.00	21.00
Band4	3MHz	16QAM	20385	1RB#14	20.12	21.00
Band4	3MHz	16QAM	20385	8RB#0	19.82	20.00
Band4	3MHz	16QAM	20385	8RB#4	19.67	20.00
Band4	3MHz	16QAM	20385	8RB#7	19.75	20.00
Band4	3MHz	16QAM	20385	15RB#0	19.49	20.00
Band4	5MHz	QPSK	19975	1RB#0	21.30	22.00
Band4	5MHz	QPSK	19975	1RB#12	21.26	22.00
Band4	5MHz	QPSK	19975	1RB#24	21.39	22.00
Band4	5MHz	QPSK	19975	12RB#0	20.77	21.00
Band4	5MHz	QPSK	19975	12RB#6	20.77	21.00
Band4	5MHz	QPSK	19975	12RB#13	20.75	21.00
Band4	5MHz	QPSK	19975	25RB#0	20.77	21.00
Band4	5MHz	16QAM	19975	1RB#0	20.51	21.00
Band4	5MHz	16QAM	19975	1RB#12	20.52	21.00
Band4	5MHz	16QAM	19975	1RB#24	20.49	21.00
Band4	5MHz	16QAM	19975	12RB#0	19.81	20.00
Band4	5MHz	16QAM	19975	12RB#6	19.90	20.00
Band4	5MHz	16QAM	19975	12RB#13	19.84	20.00
Band4	5MHz	16QAM	19975	25RB#0	19.70	20.00
Band4	5MHz	QPSK	20175	1RB#0	21.59	22.00
Band4	5MHz	QPSK	20175	1RB#12	21.43	22.00
Band4	5MHz	QPSK	20175	1RB#24	21.31	22.00
Band4	5MHz	QPSK	20175	12RB#0	20.92	21.00
Band4	5MHz	QPSK	20175	12RB#6	20.93	21.00
Band4	5MHz	QPSK	20175	12RB#13	21.00	22.00
Band4	5MHz	QPSK	20175	25RB#0	21.02	22.00
Band4	5MHz	16QAM	20175	1RB#0	20.47	21.00
Band4	5MHz	16QAM	20175	1RB#12	20.39	21.00
Band4	5MHz	16QAM	20175	1RB#24	20.26	21.00
Band4	5MHz	16QAM	20175	12RB#0	19.87	20.00
Band4	5MHz	16QAM	20175	12RB#6	19.96	20.00
Band4	5MHz	16QAM	20175	12RB#13	19.98	20.00
Band4	5MHz	16QAM	20175	25RB#0	20.10	21.00
Band4	5MHz	QPSK	20375	1RB#0	20.99	21.00
Band4	5MHz	QPSK	20375	1RB#12	21.01	22.00
Band4	5MHz	QPSK	20375	1RB#24	21.11	22.00
Band4	5MHz	QPSK	20375	12RB#0	20.52	21.00
Band4	5MHz	QPSK	20375	12RB#6	20.54	21.00
Band4	5MHz	QPSK	20375	12RB#13	20.49	21.00
Band4	5MHz	QPSK	20375	25RB#0	20.55	21.00
Band4	5MHz	16QAM	20375	1RB#0	20.66	21.00
Band4	5MHz	16QAM	20375	1RB#12	20.10	21.00
Band4	5MHz	16QAM	20375	1RB#24	20.28	21.00
Band4	5MHz	16QAM	20375	12RB#0	19.44	20.00
Band4	5MHz	16QAM	20375	12RB#6	19.46	20.00
Band4	5MHz	16QAM	20375	12RB#13	19.42	20.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band4	5MHz	16QAM	20375	25RB#0	19.37	20.00
Band4	10MHz	QPSK	20000	1RB#0	21.29	22.00
Band4	10MHz	QPSK	20000	1RB#24	21.23	22.00
Band4	10MHz	QPSK	20000	1RB#49	21.34	22.00
Band4	10MHz	QPSK	20000	25RB#0	20.79	21.00
Band4	10MHz	QPSK	20000	25RB#12	20.79	21.00
Band4	10MHz	QPSK	20000	25RB#25	20.72	21.00
Band4	10MHz	QPSK	20000	50RB#0	20.73	21.00
Band4	10MHz	16QAM	20000	1RB#0	20.60	21.00
Band4	10MHz	16QAM	20000	1RB#24	20.14	21.00
Band4	10MHz	16QAM	20000	1RB#49	20.19	21.00
Band4	10MHz	16QAM	20000	25RB#0	20.01	21.00
Band4	10MHz	16QAM	20000	25RB#12	19.88	20.00
Band4	10MHz	16QAM	20000	25RB#25	19.89	20.00
Band4	10MHz	16QAM	20000	50RB#0	19.78	20.00
Band4	10MHz	QPSK	20175	1RB#0	21.54	22.00
Band4	10MHz	QPSK	20175	1RB#24	21.56	22.00
Band4	10MHz	QPSK	20175	1RB#49	21.39	22.00
Band4	10MHz	QPSK	20175	25RB#0	20.89	21.00
Band4	10MHz	QPSK	20175	25RB#12	20.92	21.00
Band4	10MHz	QPSK	20175	25RB#25	20.75	21.00
Band4	10MHz	QPSK	20175	50RB#0	21.01	22.00
Band4	10MHz	16QAM	20175	1RB#0	21.45	22.00
Band4	10MHz	16QAM	20175	1RB#24	20.82	21.00
Band4	10MHz	16QAM	20175	1RB#49	21.41	22.00
Band4	10MHz	16QAM	20175	25RB#0	20.00	21.00
Band4	10MHz	16QAM	20175	25RB#12	19.93	20.00
Band4	10MHz	16QAM	20175	25RB#25	20.02	21.00
Band4	10MHz	16QAM	20175	50RB#0	20.06	21.00
Band4	10MHz	QPSK	20350	1RB#0	21.08	22.00
Band4	10MHz	QPSK	20350	1RB#24	20.95	21.00
Band4	10MHz	QPSK	20350	1RB#49	21.07	22.00
Band4	10MHz	QPSK	20350	25RB#0	20.45	21.00
Band4	10MHz	QPSK	20350	25RB#12	20.49	21.00
Band4	10MHz	QPSK	20350	25RB#25	20.56	21.00
Band4	10MHz	QPSK	20350	50RB#0	20.55	21.00
Band4	10MHz	16QAM	20350	1RB#0	20.19	21.00
Band4	10MHz	16QAM	20350	1RB#24	20.53	21.00
Band4	10MHz	16QAM	20350	1RB#49	20.20	21.00
Band4	10MHz	16QAM	20350	25RB#0	19.48	20.00
Band4	10MHz	16QAM	20350	25RB#12	19.44	20.00
Band4	10MHz	16QAM	20350	25RB#25	19.46	20.00
Band4	10MHz	16QAM	20350	50RB#0	19.89	20.00
Band4	15MHz	QPSK	20025	1RB#0	21.30	22.00
Band4	15MHz	QPSK	20025	1RB#38	20.90	21.00
Band4	15MHz	QPSK	20025	1RB#74	20.91	21.00
Band4	15MHz	QPSK	20025	38RB#0	20.77	21.00
Band4	15MHz	QPSK	20025	38RB#18	20.52	21.00
Band4	15MHz	QPSK	20025	38RB#37	20.71	21.00
Band4	15MHz	QPSK	20025	75RB#0	20.78	21.00
Band4	15MHz	16QAM	20025	1RB#0	20.54	21.00
Band4	15MHz	16QAM	20025	1RB#38	20.51	21.00
Band4	15MHz	16QAM	20025	1RB#74	20.60	21.00
Band4	15MHz	16QAM	20025	38RB#0	20.71	21.00
Band4	15MHz	16QAM	20025	38RB#18	20.50	21.00
Band4	15MHz	16QAM	20025	38RB#37	20.58	21.00
Band4	15MHz	16QAM	20025	75RB#0	19.91	20.00
Band4	15MHz	QPSK	20175	1RB#0	21.70	22.00
Band4	15MHz	QPSK	20175	1RB#38	21.58	22.00
Band4	15MHz	QPSK	20175	1RB#74	21.31	22.00
Band4	15MHz	QPSK	20175	38RB#0	21.53	22.00
Band4	15MHz	QPSK	20175	38RB#18	21.50	22.00
Band4	15MHz	QPSK	20175	38RB#37	21.27	22.00
Band4	15MHz	QPSK	20175	75RB#0	20.96	21.00
Band4	15MHz	16QAM	20175	1RB#0	20.80	21.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band4	15MHz	16QAM	20175	1RB#38	20.81	21.00
Band4	15MHz	16QAM	20175	1RB#74	21.33	22.00
Band4	15MHz	16QAM	20175	38RB#0	20.81	21.00
Band4	15MHz	16QAM	20175	38RB#18	21.51	22.00
Band4	15MHz	16QAM	20175	38RB#37	21.28	22.00
Band4	15MHz	16QAM	20175	75RB#0	20.00	21.00
Band4	15MHz	QPSK	20325	1RB#0	21.14	22.00
Band4	15MHz	QPSK	20325	1RB#38	20.99	21.00
Band4	15MHz	QPSK	20325	1RB#74	20.97	21.00
Band4	15MHz	QPSK	20325	38RB#0	20.38	21.00
Band4	15MHz	QPSK	20325	38RB#18	20.57	21.00
Band4	15MHz	QPSK	20325	38RB#37	20.60	21.00
Band4	15MHz	QPSK	20325	75RB#0	20.60	21.00
Band4	15MHz	16QAM	20325	1RB#0	20.70	21.00
Band4	15MHz	16QAM	20325	1RB#38	20.55	21.00
Band4	15MHz	16QAM	20325	1RB#74	20.58	21.00
Band4	15MHz	16QAM	20325	38RB#0	20.68	21.00
Band4	15MHz	16QAM	20325	38RB#18	20.59	21.00
Band4	15MHz	16QAM	20325	38RB#37	20.57	21.00
Band4	15MHz	16QAM	20325	75RB#0	19.51	20.00
Band4	20MHz	QPSK	20050	1RB#0	21.26	22.00
Band4	20MHz	QPSK	20050	1RB#49	21.38	22.00
Band4	20MHz	QPSK	20050	1RB#99	21.44	22.00
Band4	20MHz	QPSK	20050	50RB#0	20.77	21.00
Band4	20MHz	QPSK	20050	50RB#25	20.77	21.00
Band4	20MHz	QPSK	20050	50RB#50	20.98	21.00
Band4	20MHz	QPSK	20050	100RB#0	20.96	21.00
Band4	20MHz	16QAM	20050	1RB#0	21.28	22.00
Band4	20MHz	16QAM	20050	1RB#49	21.36	22.00
Band4	20MHz	16QAM	20050	1RB#99	21.29	22.00
Band4	20MHz	16QAM	20050	50RB#0	19.83	20.00
Band4	20MHz	16QAM	20050	50RB#25	19.87	20.00
Band4	20MHz	16QAM	20050	50RB#50	19.85	20.00
Band4	20MHz	16QAM	20050	100RB#0	19.93	20.00
Band4	20MHz	QPSK	20175	1RB#0	21.35	22.00
Band4	20MHz	QPSK	20175	1RB#49	21.29	22.00
Band4	20MHz	QPSK	20175	1RB#99	20.99	21.00
Band4	20MHz	QPSK	20175	50RB#0	20.89	21.00
Band4	20MHz	QPSK	20175	50RB#25	20.89	21.00
Band4	20MHz	QPSK	20175	50RB#50	20.82	21.00
Band4	20MHz	QPSK	20175	100RB#0	20.94	21.00
Band4	20MHz	16QAM	20175	1RB#0	20.58	21.00
Band4	20MHz	16QAM	20175	1RB#49	20.89	21.00
Band4	20MHz	16QAM	20175	1RB#99	20.50	21.00
Band4	20MHz	16QAM	20175	50RB#0	20.15	21.00
Band4	20MHz	16QAM	20175	50RB#25	20.16	21.00
Band4	20MHz	16QAM	20175	50RB#50	19.89	20.00
Band4	20MHz	16QAM	20175	100RB#0	19.95	20.00
Band4	20MHz	QPSK	20300	1RB#0	21.67	22.00
Band4	20MHz	QPSK	20300	1RB#49	21.28	22.00
Band4	20MHz	QPSK	20300	1RB#99	21.24	22.00
Band4	20MHz	QPSK	20300	50RB#0	20.65	21.00
Band4	20MHz	QPSK	20300	50RB#25	20.64	21.00
Band4	20MHz	QPSK	20300	50RB#50	20.43	21.00
Band4	20MHz	QPSK	20300	100RB#0	20.62	21.00
Band4	20MHz	16QAM	20300	1RB#0	21.07	22.00
Band4	20MHz	16QAM	20300	1RB#49	20.00	21.00
Band4	20MHz	16QAM	20300	1RB#99	19.88	20.00
Band4	20MHz	16QAM	20300	50RB#0	19.85	20.00
Band4	20MHz	16QAM	20300	50RB#25	19.75	20.00
Band4	20MHz	16QAM	20300	50RB#50	20.12	21.00
Band4	20MHz	16QAM	20300	100RB#0	19.61	20.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**7.1.8. Conducted Power Measurement Results(LTE Band 5)**

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Tune Up (dBm)
Band5	1.4MHz	QPSK	20407	1RB#0	23.07	24.00
Band5	1.4MHz	QPSK	20407	1RB#2	23.09	24.00
Band5	1.4MHz	QPSK	20407	1RB#5	23.10	24.00
Band5	1.4MHz	QPSK	20407	3RB#0	23.21	24.00
Band5	1.4MHz	QPSK	20407	3RB#1	23.16	24.00
Band5	1.4MHz	QPSK	20407	3RB#3	23.21	24.00
Band5	1.4MHz	QPSK	20407	6RB#0	22.66	23.00
Band5	1.4MHz	16QAM	20407	1RB#0	23.26	24.00
Band5	1.4MHz	16QAM	20407	1RB#2	23.75	24.00
Band5	1.4MHz	16QAM	20407	1RB#5	23.32	24.00
Band5	1.4MHz	16QAM	20407	3RB#0	22.52	23.00
Band5	1.4MHz	16QAM	20407	3RB#1	22.16	23.00
Band5	1.4MHz	16QAM	20407	3RB#3	22.54	23.00
Band5	1.4MHz	16QAM	20407	6RB#0	21.78	22.00
Band5	1.4MHz	QPSK	20525	1RB#0	23.19	24.00
Band5	1.4MHz	QPSK	20525	1RB#2	23.28	24.00
Band5	1.4MHz	QPSK	20525	1RB#5	23.15	24.00
Band5	1.4MHz	QPSK	20525	3RB#0	23.30	24.00
Band5	1.4MHz	QPSK	20525	3RB#1	23.30	24.00
Band5	1.4MHz	QPSK	20525	3RB#3	23.24	24.00
Band5	1.4MHz	QPSK	20525	6RB#0	22.75	23.00
Band5	1.4MHz	16QAM	20525	1RB#0	22.87	23.00
Band5	1.4MHz	16QAM	20525	1RB#2	23.48	24.00
Band5	1.4MHz	16QAM	20525	1RB#5	22.98	23.00
Band5	1.4MHz	16QAM	20525	3RB#0	22.52	23.00
Band5	1.4MHz	16QAM	20525	3RB#1	22.56	23.00
Band5	1.4MHz	16QAM	20525	3RB#3	22.33	23.00
Band5	1.4MHz	16QAM	20525	6RB#0	21.85	22.00
Band5	1.4MHz	QPSK	20643	1RB#0	22.79	23.00
Band5	1.4MHz	QPSK	20643	1RB#2	22.86	23.00
Band5	1.4MHz	QPSK	20643	1RB#5	22.85	23.00
Band5	1.4MHz	QPSK	20643	3RB#0	22.90	23.00
Band5	1.4MHz	QPSK	20643	3RB#1	22.89	23.00
Band5	1.4MHz	QPSK	20643	3RB#3	22.91	23.00
Band5	1.4MHz	QPSK	20643	6RB#0	22.40	23.00
Band5	1.4MHz	16QAM	20643	1RB#0	23.14	24.00
Band5	1.4MHz	16QAM	20643	1RB#2	23.07	24.00
Band5	1.4MHz	16QAM	20643	1RB#5	23.09	24.00
Band5	1.4MHz	16QAM	20643	3RB#0	22.11	23.00
Band5	1.4MHz	16QAM	20643	3RB#1	21.83	22.00
Band5	1.4MHz	16QAM	20643	3RB#3	21.89	22.00
Band5	1.4MHz	16QAM	20643	6RB#0	21.57	22.00
Band5	3MHz	QPSK	20415	1RB#0	23.16	24.00
Band5	3MHz	QPSK	20415	1RB#8	23.16	24.00
Band5	3MHz	QPSK	20415	1RB#14	23.26	24.00
Band5	3MHz	QPSK	20415	8RB#0	22.66	23.00
Band5	3MHz	QPSK	20415	8RB#4	22.68	23.00
Band5	3MHz	QPSK	20415	8RB#7	22.70	23.00
Band5	3MHz	QPSK	20415	15RB#0	22.62	23.00
Band5	3MHz	16QAM	20415	1RB#0	22.49	23.00
Band5	3MHz	16QAM	20415	1RB#8	22.02	23.00
Band5	3MHz	16QAM	20415	1RB#14	22.48	23.00
Band5	3MHz	16QAM	20415	8RB#0	21.82	22.00
Band5	3MHz	16QAM	20415	8RB#4	21.87	22.00
Band5	3MHz	16QAM	20415	8RB#7	21.85	22.00
Band5	3MHz	16QAM	20415	15RB#0	21.58	22.00
Band5	3MHz	QPSK	20525	1RB#0	23.17	24.00
Band5	3MHz	QPSK	20525	1RB#8	23.14	24.00
Band5	3MHz	QPSK	20525	1RB#14	23.26	24.00
Band5	3MHz	QPSK	20525	8RB#0	22.51	23.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band5	3MHz	QPSK	20525	8RB#4	22.62	23.00
Band5	3MHz	QPSK	20525	8RB#7	22.67	23.00
Band5	3MHz	QPSK	20525	15RB#0	22.71	23.00
Band5	3MHz	16QAM	20525	1RB#0	23.17	24.00
Band5	3MHz	16QAM	20525	1RB#8	23.23	24.00
Band5	3MHz	16QAM	20525	1RB#14	22.56	23.00
Band5	3MHz	16QAM	20525	8RB#0	21.88	22.00
Band5	3MHz	16QAM	20525	8RB#4	21.94	22.00
Band5	3MHz	16QAM	20525	8RB#7	21.83	22.00
Band5	3MHz	16QAM	20525	15RB#0	21.67	22.00
Band5	3MHz	QPSK	20635	1RB#0	22.96	23.00
Band5	3MHz	QPSK	20635	1RB#8	22.90	23.00
Band5	3MHz	QPSK	20635	1RB#14	22.89	23.00
Band5	3MHz	QPSK	20635	8RB#0	22.42	23.00
Band5	3MHz	QPSK	20635	8RB#4	22.48	23.00
Band5	3MHz	QPSK	20635	8RB#7	22.47	23.00
Band5	3MHz	QPSK	20635	15RB#0	22.41	23.00
Band5	3MHz	16QAM	20635	1RB#0	22.49	23.00
Band5	3MHz	16QAM	20635	1RB#8	22.35	23.00
Band5	3MHz	16QAM	20635	1RB#14	22.10	23.00
Band5	3MHz	16QAM	20635	8RB#0	21.56	22.00
Band5	3MHz	16QAM	20635	8RB#4	21.65	22.00
Band5	3MHz	16QAM	20635	8RB#7	21.62	22.00
Band5	3MHz	16QAM	20635	15RB#0	21.46	22.00
Band5	5MHz	QPSK	20425	1RB#0	23.32	24.00
Band5	5MHz	QPSK	20425	1RB#12	23.25	24.00
Band5	5MHz	QPSK	20425	1RB#24	23.30	24.00
Band5	5MHz	QPSK	20425	12RB#0	22.70	23.00
Band5	5MHz	QPSK	20425	12RB#6	22.68	23.00
Band5	5MHz	QPSK	20425	12RB#13	22.59	23.00
Band5	5MHz	QPSK	20425	25RB#0	22.69	23.00
Band5	5MHz	16QAM	20425	1RB#0	22.80	23.00
Band5	5MHz	16QAM	20425	1RB#12	22.81	23.00
Band5	5MHz	16QAM	20425	1RB#24	22.75	23.00
Band5	5MHz	16QAM	20425	12RB#0	21.62	22.00
Band5	5MHz	16QAM	20425	12RB#6	21.78	22.00
Band5	5MHz	16QAM	20425	12RB#13	21.79	22.00
Band5	5MHz	16QAM	20425	25RB#0	21.74	22.00
Band5	5MHz	QPSK	20525	1RB#0	23.07	24.00
Band5	5MHz	QPSK	20525	1RB#12	23.09	24.00
Band5	5MHz	QPSK	20525	1RB#24	23.00	24.00
Band5	5MHz	QPSK	20525	12RB#0	22.69	23.00
Band5	5MHz	QPSK	20525	12RB#6	22.64	23.00
Band5	5MHz	QPSK	20525	12RB#13	22.61	23.00
Band5	5MHz	QPSK	20525	25RB#0	22.68	23.00
Band5	5MHz	16QAM	20525	1RB#0	22.21	23.00
Band5	5MHz	16QAM	20525	1RB#12	22.22	23.00
Band5	5MHz	16QAM	20525	1RB#24	22.35	23.00
Band5	5MHz	16QAM	20525	12RB#0	21.71	22.00
Band5	5MHz	16QAM	20525	12RB#6	21.61	22.00
Band5	5MHz	16QAM	20525	12RB#13	21.54	22.00
Band5	5MHz	16QAM	20525	25RB#0	21.73	22.00
Band5	5MHz	QPSK	20625	1RB#0	23.26	24.00
Band5	5MHz	QPSK	20625	1RB#12	23.06	24.00
Band5	5MHz	QPSK	20625	1RB#24	22.99	23.00
Band5	5MHz	QPSK	20625	12RB#0	22.52	23.00
Band5	5MHz	QPSK	20625	12RB#6	22.54	23.00
Band5	5MHz	QPSK	20625	12RB#13	22.37	23.00
Band5	5MHz	QPSK	20625	25RB#0	22.46	23.00
Band5	5MHz	16QAM	20625	1RB#0	21.87	22.00
Band5	5MHz	16QAM	20625	1RB#12	21.95	22.00
Band5	5MHz	16QAM	20625	1RB#24	21.98	22.00
Band5	5MHz	16QAM	20625	12RB#0	21.57	22.00
Band5	5MHz	16QAM	20625	12RB#6	21.56	22.00
Band5	5MHz	16QAM	20625	12RB#13	21.51	22.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band5	5MHz	16QAM	20625	25RB#0	21.66	22.00
Band5	10MHz	QPSK	20450	1RB#0	23.20	24.00
Band5	10MHz	QPSK	20450	1RB#24	23.23	24.00
Band5	10MHz	QPSK	20450	1RB#49	23.15	24.00
Band5	10MHz	QPSK	20450	25RB#0	22.61	23.00
Band5	10MHz	QPSK	20450	25RB#12	22.71	23.00
Band5	10MHz	QPSK	20450	25RB#25	22.65	23.00
Band5	10MHz	QPSK	20450	50RB#0	22.70	23.00
Band5	10MHz	16QAM	20450	1RB#0	21.96	22.00
Band5	10MHz	16QAM	20450	1RB#24	22.14	23.00
Band5	10MHz	16QAM	20450	1RB#49	21.96	22.00
Band5	10MHz	16QAM	20450	25RB#0	21.87	22.00
Band5	10MHz	16QAM	20450	25RB#12	21.80	22.00
Band5	10MHz	16QAM	20450	25RB#25	21.76	22.00
Band5	10MHz	16QAM	20450	50RB#0	21.77	22.00
Band5	10MHz	QPSK	20525	1RB#0	23.40	24.00
Band5	10MHz	QPSK	20525	1RB#24	23.26	24.00
Band5	10MHz	QPSK	20525	1RB#49	23.21	24.00
Band5	10MHz	QPSK	20525	25RB#0	22.59	23.00
Band5	10MHz	QPSK	20525	25RB#12	22.62	23.00
Band5	10MHz	QPSK	20525	25RB#25	22.72	23.00
Band5	10MHz	QPSK	20525	50RB#0	22.65	23.00
Band5	10MHz	16QAM	20525	1RB#0	23.29	24.00
Band5	10MHz	16QAM	20525	1RB#24	23.19	24.00
Band5	10MHz	16QAM	20525	1RB#49	23.15	24.00
Band5	10MHz	16QAM	20525	25RB#0	21.78	22.00
Band5	10MHz	16QAM	20525	25RB#12	21.86	22.00
Band5	10MHz	16QAM	20525	25RB#25	21.87	22.00
Band5	10MHz	16QAM	20525	50RB#0	21.76	22.00
Band5	10MHz	QPSK	20600	1RB#0	23.13	24.00
Band5	10MHz	QPSK	20600	1RB#24	23.08	24.00
Band5	10MHz	QPSK	20600	1RB#49	22.97	23.00
Band5	10MHz	QPSK	20600	25RB#0	22.77	23.00
Band5	10MHz	QPSK	20600	25RB#12	22.67	23.00
Band5	10MHz	QPSK	20600	25RB#25	22.50	23.00
Band5	10MHz	QPSK	20600	50RB#0	22.62	23.00
Band5	10MHz	16QAM	20600	1RB#0	22.62	23.00
Band5	10MHz	16QAM	20600	1RB#24	22.38	23.00
Band5	10MHz	16QAM	20600	1RB#49	22.11	23.00
Band5	10MHz	16QAM	20600	25RB#0	21.69	22.00
Band5	10MHz	16QAM	20600	25RB#12	21.66	22.00
Band5	10MHz	16QAM	20600	25RB#25	21.51	22.00
Band5	10MHz	16QAM	20600	50RB#0	21.66	22.00



**7.1.9. Conducted Power Measurement Results(LTE Band 7)**

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Tune Up (dBm)
Band7	5MHz	QPSK	20775	1RB#0	21.06	22.00
Band7	5MHz	QPSK	20775	1RB#12	21.05	22.00
Band7	5MHz	QPSK	20775	1RB#24	21.09	22.00
Band7	5MHz	QPSK	20775	12RB#0	20.02	21.00
Band7	5MHz	QPSK	20775	12RB#6	20.03	21.00
Band7	5MHz	QPSK	20775	12RB#13	20.06	21.00
Band7	5MHz	QPSK	20775	25RB#0	20.10	21.00
Band7	5MHz	16QAM	20775	1RB#0	19.45	20.00
Band7	5MHz	16QAM	20775	1RB#12	19.34	20.00
Band7	5MHz	16QAM	20775	1RB#24	19.44	20.00
Band7	5MHz	16QAM	20775	12RB#0	19.07	20.00
Band7	5MHz	16QAM	20775	12RB#6	19.12	20.00
Band7	5MHz	16QAM	20775	12RB#13	19.07	20.00
Band7	5MHz	16QAM	20775	25RB#0	19.26	20.00
Band7	5MHz	QPSK	21100	1RB#0	21.38	22.00
Band7	5MHz	QPSK	21100	1RB#12	21.07	22.00
Band7	5MHz	QPSK	21100	1RB#24	21.24	22.00
Band7	5MHz	QPSK	21100	12RB#0	20.35	21.00
Band7	5MHz	QPSK	21100	12RB#6	20.38	21.00
Band7	5MHz	QPSK	21100	12RB#13	20.33	21.00
Band7	5MHz	QPSK	21100	25RB#0	20.38	21.00
Band7	5MHz	16QAM	21100	1RB#0	19.94	20.00
Band7	5MHz	16QAM	21100	1RB#12	19.67	20.00
Band7	5MHz	16QAM	21100	1RB#24	19.64	20.00
Band7	5MHz	16QAM	21100	12RB#0	19.47	20.00
Band7	5MHz	16QAM	21100	12RB#6	19.47	20.00
Band7	5MHz	16QAM	21100	12RB#13	19.32	20.00
Band7	5MHz	16QAM	21100	25RB#0	19.57	20.00
Band7	5MHz	QPSK	21425	1RB#0	21.84	22.00
Band7	5MHz	QPSK	21425	1RB#12	21.53	22.00
Band7	5MHz	QPSK	21425	1RB#24	21.70	22.00
Band7	5MHz	QPSK	21425	12RB#0	20.78	21.00
Band7	5MHz	QPSK	21425	12RB#6	20.79	21.00
Band7	5MHz	QPSK	21425	12RB#13	20.71	21.00
Band7	5MHz	QPSK	21425	25RB#0	20.77	21.00
Band7	5MHz	16QAM	21425	1RB#0	20.50	21.00
Band7	5MHz	16QAM	21425	1RB#12	21.06	22.00
Band7	5MHz	16QAM	21425	1RB#24	20.47	21.00
Band7	5MHz	16QAM	21425	12RB#0	19.97	20.00
Band7	5MHz	16QAM	21425	12RB#6	20.07	21.00
Band7	5MHz	16QAM	21425	12RB#13	19.80	20.00
Band7	5MHz	16QAM	21425	25RB#0	19.71	20.00
Band7	10MHz	QPSK	20800	1RB#0	20.79	21.00
Band7	10MHz	QPSK	20800	1RB#24	20.83	21.00
Band7	10MHz	QPSK	20800	1RB#49	20.93	21.00
Band7	10MHz	QPSK	20800	25RB#0	20.06	21.00
Band7	10MHz	QPSK	20800	25RB#12	20.10	21.00
Band7	10MHz	QPSK	20800	25RB#25	20.07	21.00
Band7	10MHz	QPSK	20800	50RB#0	19.99	20.00
Band7	10MHz	16QAM	20800	1RB#0	19.88	20.00
Band7	10MHz	16QAM	20800	1RB#24	19.44	20.00
Band7	10MHz	16QAM	20800	1RB#49	19.47	20.00
Band7	10MHz	16QAM	20800	25RB#0	19.20	20.00
Band7	10MHz	16QAM	20800	25RB#12	19.27	20.00
Band7	10MHz	16QAM	20800	25RB#25	19.36	20.00
Band7	10MHz	16QAM	20800	50RB#0	19.28	20.00
Band7	10MHz	QPSK	21100	1RB#0	21.34	22.00
Band7	10MHz	QPSK	21100	1RB#24	21.18	22.00
Band7	10MHz	QPSK	21100	1RB#49	20.89	21.00
Band7	10MHz	QPSK	21100	25RB#0	20.43	21.00
Band7	10MHz	QPSK	21100	25RB#12	20.45	21.00
Band7	10MHz	QPSK	21100	25RB#25	20.25	21.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band7	10MHz	QPSK	21100	50RB#0	20.29	21.00
Band7	10MHz	16QAM	21100	1RB#0	20.59	21.00
Band7	10MHz	16QAM	21100	1RB#24	19.97	20.00
Band7	10MHz	16QAM	21100	1RB#49	20.38	21.00
Band7	10MHz	16QAM	21100	25RB#0	19.42	20.00
Band7	10MHz	16QAM	21100	25RB#12	19.43	20.00
Band7	10MHz	16QAM	21100	25RB#25	19.27	20.00
Band7	10MHz	16QAM	21100	50RB#0	19.30	20.00
Band7	10MHz	QPSK	21400	1RB#0	21.57	22.00
Band7	10MHz	QPSK	21400	1RB#24	21.65	22.00
Band7	10MHz	QPSK	21400	1RB#49	21.55	22.00
Band7	10MHz	QPSK	21400	25RB#0	20.80	21.00
Band7	10MHz	QPSK	21400	25RB#12	20.79	21.00
Band7	10MHz	QPSK	21400	25RB#25	20.74	21.00
Band7	10MHz	QPSK	21400	50RB#0	20.88	21.00
Band7	10MHz	16QAM	21400	1RB#0	20.11	21.00
Band7	10MHz	16QAM	21400	1RB#24	20.26	21.00
Band7	10MHz	16QAM	21400	1RB#49	20.14	21.00
Band7	10MHz	16QAM	21400	25RB#0	20.02	21.00
Band7	10MHz	16QAM	21400	25RB#12	20.04	21.00
Band7	10MHz	16QAM	21400	25RB#25	20.27	21.00
Band7	10MHz	16QAM	21400	50RB#0	20.00	21.00
Band7	15MHz	QPSK	20825	1RB#0	20.35	21.00
Band7	15MHz	QPSK	20825	1RB#38	20.49	21.00
Band7	15MHz	QPSK	20825	1RB#74	20.76	21.00
Band7	15MHz	QPSK	20825	38RB#0	19.91	20.00
Band7	15MHz	QPSK	20825	38RB#18	20.10	21.00
Band7	15MHz	QPSK	20825	38RB#37	20.28	21.00
Band7	15MHz	QPSK	20825	75RB#0	20.08	21.00
Band7	15MHz	16QAM	20825	1RB#0	19.94	20.00
Band7	15MHz	16QAM	20825	1RB#38	20.07	21.00
Band7	15MHz	16QAM	20825	1RB#74	20.80	21.00
Band7	15MHz	16QAM	20825	38RB#0	19.89	20.00
Band7	15MHz	16QAM	20825	38RB#18	20.07	21.00
Band7	15MHz	16QAM	20825	38RB#37	20.28	21.00
Band7	15MHz	16QAM	20825	75RB#0	19.35	20.00
Band7	15MHz	QPSK	21100	1RB#0	21.21	22.00
Band7	15MHz	QPSK	21100	1RB#38	21.11	22.00
Band7	15MHz	QPSK	21100	1RB#74	20.84	21.00
Band7	15MHz	QPSK	21100	38RB#0	20.23	21.00
Band7	15MHz	QPSK	21100	38RB#18	20.47	21.00
Band7	15MHz	QPSK	21100	38RB#37	20.41	21.00
Band7	15MHz	QPSK	21100	75RB#0	20.32	21.00
Band7	15MHz	16QAM	21100	1RB#0	20.16	21.00
Band7	15MHz	16QAM	21100	1RB#38	20.06	21.00
Band7	15MHz	16QAM	21100	1RB#74	19.88	20.00
Band7	15MHz	16QAM	21100	38RB#0	20.81	21.00
Band7	15MHz	16QAM	21100	38RB#18	20.47	21.00
Band7	15MHz	16QAM	21100	38RB#37	20.42	21.00
Band7	15MHz	16QAM	21100	75RB#0	19.37	20.00
Band7	15MHz	QPSK	21375	1RB#0	21.33	22.00
Band7	15MHz	QPSK	21375	1RB#38	21.45	22.00
Band7	15MHz	QPSK	21375	1RB#74	21.55	22.00
Band7	15MHz	QPSK	21375	38RB#0	20.50	21.00
Band7	15MHz	QPSK	21375	38RB#18	21.20	22.00
Band7	15MHz	QPSK	21375	38RB#37	21.11	22.00
Band7	15MHz	QPSK	21375	75RB#0	20.80	21.00
Band7	15MHz	16QAM	21375	1RB#0	20.96	21.00
Band7	15MHz	16QAM	21375	1RB#38	21.15	22.00
Band7	15MHz	16QAM	21375	1RB#74	21.19	22.00
Band7	15MHz	16QAM	21375	38RB#0	20.63	21.00
Band7	15MHz	16QAM	21375	38RB#18	21.23	22.00
Band7	15MHz	16QAM	21375	38RB#37	20.73	21.00
Band7	15MHz	16QAM	21375	75RB#0	19.79	20.00
Band7	20MHz	QPSK	20850	1RB#0	22.08	23.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band7	20MHz	QPSK	20850	1RB#49	22.17	23.00
Band7	20MHz	QPSK	20850	1RB#99	22.15	23.00
Band7	20MHz	QPSK	20850	50RB#0	21.17	22.00
Band7	20MHz	QPSK	20850	50RB#25	21.15	22.00
Band7	20MHz	QPSK	20850	50RB#50	21.18	22.00
Band7	20MHz	QPSK	20850	100RB#0	21.17	22.00
Band7	20MHz	16QAM	20850	1RB#0	21.28	22.00
Band7	20MHz	16QAM	20850	1RB#49	21.35	22.00
Band7	20MHz	16QAM	20850	1RB#99	21.38	22.00
Band7	20MHz	16QAM	20850	50RB#0	20.14	21.00
Band7	20MHz	16QAM	20850	50RB#25	20.15	21.00
Band7	20MHz	16QAM	20850	50RB#50	20.22	21.00
Band7	20MHz	16QAM	20850	100RB#0	20.16	21.00
Band7	20MHz	QPSK	21100	1RB#0	22.45	23.00
Band7	20MHz	QPSK	21100	1RB#49	22.39	23.00
Band7	20MHz	QPSK	21100	1RB#99	21.91	22.00
Band7	20MHz	QPSK	21100	50RB#0	21.37	22.00
Band7	20MHz	QPSK	21100	50RB#25	21.32	22.00
Band7	20MHz	QPSK	21100	50RB#50	20.98	21.00
Band7	20MHz	QPSK	21100	100RB#0	21.15	22.00
Band7	20MHz	16QAM	21100	1RB#0	21.25	22.00
Band7	20MHz	16QAM	21100	1RB#49	21.20	22.00
Band7	20MHz	16QAM	21100	1RB#99	20.77	21.00
Band7	20MHz	16QAM	21100	50RB#0	20.31	21.00
Band7	20MHz	16QAM	21100	50RB#25	20.30	21.00
Band7	20MHz	16QAM	21100	50RB#50	19.95	20.00
Band7	20MHz	16QAM	21100	100RB#0	20.11	21.00
Band7	20MHz	QPSK	21350	1RB#0	21.91	22.00
Band7	20MHz	QPSK	21350	1RB#49	22.11	23.00
Band7	20MHz	QPSK	21350	1RB#99	22.12	23.00
Band7	20MHz	QPSK	21350	50RB#0	21.02	22.00
Band7	20MHz	QPSK	21350	50RB#25	21.04	22.00
Band7	20MHz	QPSK	21350	50RB#50	21.12	22.00
Band7	20MHz	QPSK	21350	100RB#0	21.06	22.00
Band7	20MHz	16QAM	21350	1RB#0	21.03	22.00
Band7	20MHz	16QAM	21350	1RB#49	21.35	22.00
Band7	20MHz	16QAM	21350	1RB#99	21.38	22.00
Band7	20MHz	16QAM	21350	50RB#0	20.05	21.00
Band7	20MHz	16QAM	21350	50RB#25	20.05	21.00
Band7	20MHz	16QAM	21350	50RB#50	20.15	21.00
Band7	20MHz	16QAM	21350	100RB#0	20.07	21.00



**7.1.10. Conducted Power Measurement Results(LTE Band 19)**

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Tune Up (dBm)
Band19	5MHz	QPSK	24025	1RB#0	24.31	25.00
Band19	5MHz	QPSK	24025	1RB#12	24.22	25.00
Band19	5MHz	QPSK	24025	1RB#24	24.16	25.00
Band19	5MHz	QPSK	24025	12RB#0	23.06	24.00
Band19	5MHz	QPSK	24025	12RB#6	23.08	24.00
Band19	5MHz	QPSK	24025	12RB#13	22.93	23.00
Band19	5MHz	QPSK	24025	25RB#0	23.04	24.00
Band19	5MHz	16QAM	24025	1RB#0	23.04	24.00
Band19	5MHz	16QAM	24025	1RB#12	22.89	23.00
Band19	5MHz	16QAM	24025	1RB#24	22.90	23.00
Band19	5MHz	16QAM	24025	12RB#0	22.06	23.00
Band19	5MHz	16QAM	24025	12RB#6	22.06	23.00
Band19	5MHz	16QAM	24025	12RB#13	21.94	22.00
Band19	5MHz	16QAM	24025	25RB#0	22.07	23.00
Band19	5MHz	QPSK	24075	1RB#0	24.13	25.00
Band19	5MHz	QPSK	24075	1RB#12	24.11	25.00
Band19	5MHz	QPSK	24075	1RB#24	24.03	25.00
Band19	5MHz	QPSK	24075	12RB#0	22.95	23.00
Band19	5MHz	QPSK	24075	12RB#6	22.96	23.00
Band19	5MHz	QPSK	24075	12RB#13	22.79	23.00
Band19	5MHz	QPSK	24075	25RB#0	22.91	23.00
Band19	5MHz	16QAM	24075	1RB#0	22.84	23.00
Band19	5MHz	16QAM	24075	1RB#12	22.87	23.00
Band19	5MHz	16QAM	24075	1RB#24	22.79	23.00
Band19	5MHz	16QAM	24075	12RB#0	21.95	22.00
Band19	5MHz	16QAM	24075	12RB#6	21.95	22.00
Band19	5MHz	16QAM	24075	12RB#13	21.81	22.00
Band19	5MHz	16QAM	24075	25RB#0	21.95	22.00
Band19	5MHz	QPSK	24125	1RB#0	24.01	25.00
Band19	5MHz	QPSK	24125	1RB#12	23.85	24.00
Band19	5MHz	QPSK	24125	1RB#24	23.88	24.00
Band19	5MHz	QPSK	24125	12RB#0	22.82	23.00
Band19	5MHz	QPSK	24125	12RB#6	22.82	23.00
Band19	5MHz	QPSK	24125	12RB#13	22.77	23.00
Band19	5MHz	QPSK	24125	25RB#0	22.76	23.00
Band19	5MHz	16QAM	24125	1RB#0	22.95	23.00
Band19	5MHz	16QAM	24125	1RB#12	22.75	23.00
Band19	5MHz	16QAM	24125	1RB#24	22.86	23.00
Band19	5MHz	16QAM	24125	12RB#0	21.82	22.00
Band19	5MHz	16QAM	24125	12RB#6	21.84	22.00
Band19	5MHz	16QAM	24125	12RB#13	21.80	22.00
Band19	5MHz	16QAM	24125	25RB#0	21.77	22.00
Band19	10MHz	QPSK	24050	1RB#0	24.14	25.00
Band19	10MHz	QPSK	24050	1RB#24	24.10	25.00
Band19	10MHz	QPSK	24050	1RB#49	23.98	24.00
Band19	10MHz	QPSK	24050	25RB#0	23.07	24.00
Band19	10MHz	QPSK	24050	25RB#12	23.09	24.00
Band19	10MHz	QPSK	24050	25RB#25	22.90	23.00
Band19	10MHz	QPSK	24050	50RB#0	23.03	24.00
Band19	10MHz	16QAM	24050	1RB#0	23.11	24.00
Band19	10MHz	16QAM	24050	1RB#24	23.10	24.00
Band19	10MHz	16QAM	24050	1RB#49	23.00	24.00
Band19	10MHz	16QAM	24050	25RB#0	22.04	23.00
Band19	10MHz	16QAM	24050	25RB#12	22.02	23.00
Band19	10MHz	16QAM	24050	25RB#25	21.88	22.00
Band19	10MHz	16QAM	24050	50RB#0	22.00	23.00
Band19	10MHz	QPSK	24075	1RB#0	24.10	25.00
Band19	10MHz	QPSK	24075	1RB#24	24.04	25.00
Band19	10MHz	QPSK	24075	1RB#49	23.92	24.00
Band19	10MHz	QPSK	24075	25RB#0	23.01	24.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band19	10MHz	QPSK	24075	25RB#12	23.01	24.00
Band19	10MHz	QPSK	24075	25RB#25	22.85	23.00
Band19	10MHz	QPSK	24075	50RB#0	22.92	23.00
Band19	10MHz	16QAM	24075	1RB#0	23.12	24.00
Band19	10MHz	16QAM	24075	1RB#24	23.00	24.00
Band19	10MHz	16QAM	24075	1RB#49	22.82	23.00
Band19	10MHz	16QAM	24075	25RB#0	21.99	22.00
Band19	10MHz	16QAM	24075	25RB#12	21.98	22.00
Band19	10MHz	16QAM	24075	25RB#25	21.85	22.00
Band19	10MHz	16QAM	24075	50RB#0	21.91	22.00
Band19	10MHz	QPSK	24100	1RB#0	23.99	24.00
Band19	10MHz	QPSK	24100	1RB#24	23.87	24.00
Band19	10MHz	QPSK	24100	1RB#49	23.74	24.00
Band19	10MHz	QPSK	24100	25RB#0	22.89	23.00
Band19	10MHz	QPSK	24100	25RB#12	22.92	23.00
Band19	10MHz	QPSK	24100	25RB#25	22.86	23.00
Band19	10MHz	QPSK	24100	50RB#0	22.87	23.00
Band19	10MHz	16QAM	24100	1RB#0	22.83	23.00
Band19	10MHz	16QAM	24100	1RB#24	22.80	23.00
Band19	10MHz	16QAM	24100	1RB#49	22.59	23.00
Band19	10MHz	16QAM	24100	25RB#0	21.94	22.00
Band19	10MHz	16QAM	24100	25RB#12	21.94	22.00
Band19	10MHz	16QAM	24100	25RB#25	21.85	22.00
Band19	10MHz	16QAM	24100	50RB#0	21.88	22.00
Band19	15MHz	QPSK	24075	1RB#0	24.06	25.00
Band19	15MHz	QPSK	24075	1RB#38	24.04	25.00
Band19	15MHz	QPSK	24075	1RB#74	23.78	24.00
Band19	15MHz	QPSK	24075	38RB#0	23.05	24.00
Band19	15MHz	QPSK	24075	38RB#18	23.02	24.00
Band19	15MHz	QPSK	24075	38RB#37	22.77	23.00
Band19	15MHz	QPSK	24075	75RB#0	22.92	23.00
Band19	15MHz	16QAM	24075	1RB#0	23.05	24.00
Band19	15MHz	16QAM	24075	1RB#38	23.04	24.00
Band19	15MHz	16QAM	24075	1RB#74	22.79	23.00
Band19	15MHz	16QAM	24075	38RB#0	23.04	24.00
Band19	15MHz	16QAM	24075	38RB#18	23.05	24.00
Band19	15MHz	16QAM	24075	38RB#37	22.79	23.00
Band19	15MHz	16QAM	24075	75RB#0	21.88	22.00



**7.1.11. Conducted Power Measurement Results(LTE Band 25)**

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Tune Up (dBm)
Band25	1.4MHz	QPSK	26047	1RB#0	23.21	24.00
Band25	1.4MHz	QPSK	26047	1RB#2	23.19	24.00
Band25	1.4MHz	QPSK	26047	1RB#5	23.21	24.00
Band25	1.4MHz	QPSK	26047	3RB#0	23.27	24.00
Band25	1.4MHz	QPSK	26047	3RB#1	23.26	24.00
Band25	1.4MHz	QPSK	26047	3RB#3	22.88	23.00
Band25	1.4MHz	QPSK	26047	6RB#0	21.79	22.00
Band25	1.4MHz	16QAM	26047	1RB#0	22.12	23.00
Band25	1.4MHz	16QAM	26047	1RB#2	22.09	23.00
Band25	1.4MHz	16QAM	26047	1RB#5	22.09	23.00
Band25	1.4MHz	16QAM	26047	3RB#0	22.07	23.00
Band25	1.4MHz	16QAM	26047	3RB#1	21.60	22.00
Band25	1.4MHz	16QAM	26047	3RB#3	21.61	22.00
Band25	1.4MHz	16QAM	26047	6RB#0	20.56	21.00
Band25	1.4MHz	QPSK	26365	1RB#0	22.61	23.00
Band25	1.4MHz	QPSK	26365	1RB#2	22.56	23.00
Band25	1.4MHz	QPSK	26365	1RB#5	22.52	23.00
Band25	1.4MHz	QPSK	26365	3RB#0	22.62	23.00
Band25	1.4MHz	QPSK	26365	3RB#1	22.62	23.00
Band25	1.4MHz	QPSK	26365	3RB#3	22.54	23.00
Band25	1.4MHz	QPSK	26365	6RB#0	21.61	22.00
Band25	1.4MHz	16QAM	26365	1RB#0	21.53	22.00
Band25	1.4MHz	16QAM	26365	1RB#2	21.56	22.00
Band25	1.4MHz	16QAM	26365	1RB#5	21.47	22.00
Band25	1.4MHz	16QAM	26365	3RB#0	21.44	22.00
Band25	1.4MHz	16QAM	26365	3RB#1	21.44	22.00
Band25	1.4MHz	16QAM	26365	3RB#3	21.40	22.00
Band25	1.4MHz	16QAM	26365	6RB#0	20.57	21.00
Band25	1.4MHz	QPSK	26683	1RB#0	22.67	23.00
Band25	1.4MHz	QPSK	26683	1RB#2	22.64	23.00
Band25	1.4MHz	QPSK	26683	1RB#5	22.60	23.00
Band25	1.4MHz	QPSK	26683	3RB#0	22.72	23.00
Band25	1.4MHz	QPSK	26683	3RB#1	22.73	23.00
Band25	1.4MHz	QPSK	26683	3RB#3	22.66	23.00
Band25	1.4MHz	QPSK	26683	6RB#0	21.70	22.00
Band25	1.4MHz	16QAM	26683	1RB#0	21.61	22.00
Band25	1.4MHz	16QAM	26683	1RB#2	21.61	22.00
Band25	1.4MHz	16QAM	26683	1RB#5	21.53	22.00
Band25	1.4MHz	16QAM	26683	3RB#0	21.56	22.00
Band25	1.4MHz	16QAM	26683	3RB#1	21.53	22.00
Band25	1.4MHz	16QAM	26683	3RB#3	21.46	22.00
Band25	1.4MHz	16QAM	26683	6RB#0	20.68	21.00
Band25	3MHz	QPSK	26055	1RB#0	23.32	24.00
Band25	3MHz	QPSK	26055	1RB#8	23.32	24.00
Band25	3MHz	QPSK	26055	1RB#14	23.31	24.00
Band25	3MHz	QPSK	26055	8RB#0	22.23	23.00
Band25	3MHz	QPSK	26055	8RB#4	22.26	23.00
Band25	3MHz	QPSK	26055	8RB#7	22.22	23.00
Band25	3MHz	QPSK	26055	15RB#0	22.22	23.00
Band25	3MHz	16QAM	26055	1RB#0	22.28	23.00
Band25	3MHz	16QAM	26055	1RB#8	22.32	23.00
Band25	3MHz	16QAM	26055	1RB#14	22.30	23.00
Band25	3MHz	16QAM	26055	8RB#0	21.28	22.00
Band25	3MHz	16QAM	26055	8RB#4	21.28	22.00
Band25	3MHz	16QAM	26055	8RB#7	21.27	22.00
Band25	3MHz	16QAM	26055	15RB#0	21.25	22.00
Band25	3MHz	QPSK	26365	1RB#0	23.27	24.00
Band25	3MHz	QPSK	26365	1RB#8	23.23	24.00
Band25	3MHz	QPSK	26365	1RB#14	23.21	24.00
Band25	3MHz	QPSK	26365	8RB#0	22.16	23.00
Band25	3MHz	QPSK	26365	8RB#4	22.12	23.00
Band25	3MHz	QPSK	26365	8RB#7	22.09	23.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band25	3MHz	QPSK	26365	15RB#0	22.09	23.00
Band25	3MHz	16QAM	26365	1RB#0	22.26	23.00
Band25	3MHz	16QAM	26365	1RB#8	22.27	23.00
Band25	3MHz	16QAM	26365	1RB#14	22.23	23.00
Band25	3MHz	16QAM	26365	8RB#0	21.17	22.00
Band25	3MHz	16QAM	26365	8RB#4	21.16	22.00
Band25	3MHz	16QAM	26365	8RB#7	21.12	22.00
Band25	3MHz	16QAM	26365	15RB#0	21.11	22.00
Band25	3MHz	QPSK	26675	1RB#0	23.47	24.00
Band25	3MHz	QPSK	26675	1RB#8	23.41	24.00
Band25	3MHz	QPSK	26675	1RB#14	23.35	24.00
Band25	3MHz	QPSK	26675	8RB#0	22.35	23.00
Band25	3MHz	QPSK	26675	8RB#4	22.32	23.00
Band25	3MHz	QPSK	26675	8RB#7	22.29	23.00
Band25	3MHz	QPSK	26675	15RB#0	22.32	23.00
Band25	3MHz	16QAM	26675	1RB#0	22.46	23.00
Band25	3MHz	16QAM	26675	1RB#8	22.41	23.00
Band25	3MHz	16QAM	26675	1RB#14	22.34	23.00
Band25	3MHz	16QAM	26675	8RB#0	21.37	22.00
Band25	3MHz	16QAM	26675	8RB#4	21.39	22.00
Band25	3MHz	16QAM	26675	8RB#7	21.34	22.00
Band25	3MHz	16QAM	26675	15RB#0	21.30	22.00
Band25	5MHz	QPSK	26065	1RB#0	23.30	24.00
Band25	5MHz	QPSK	26065	1RB#12	23.29	24.00
Band25	5MHz	QPSK	26065	1RB#24	23.29	24.00
Band25	5MHz	QPSK	26065	12RB#0	22.24	23.00
Band25	5MHz	QPSK	26065	12RB#6	22.25	23.00
Band25	5MHz	QPSK	26065	12RB#13	22.17	23.00
Band25	5MHz	QPSK	26065	25RB#0	22.21	23.00
Band25	5MHz	16QAM	26065	1RB#0	22.28	23.00
Band25	5MHz	16QAM	26065	1RB#12	22.30	23.00
Band25	5MHz	16QAM	26065	1RB#24	22.31	23.00
Band25	5MHz	16QAM	26065	12RB#0	21.27	22.00
Band25	5MHz	16QAM	26065	12RB#6	21.27	22.00
Band25	5MHz	16QAM	26065	12RB#13	21.15	22.00
Band25	5MHz	16QAM	26065	25RB#0	21.19	22.00
Band25	5MHz	QPSK	26365	1RB#0	23.35	24.00
Band25	5MHz	QPSK	26365	1RB#12	23.31	24.00
Band25	5MHz	QPSK	26365	1RB#24	23.28	24.00
Band25	5MHz	QPSK	26365	12RB#0	22.12	23.00
Band25	5MHz	QPSK	26365	12RB#6	22.12	23.00
Band25	5MHz	QPSK	26365	12RB#13	22.10	23.00
Band25	5MHz	QPSK	26365	25RB#0	22.15	23.00
Band25	5MHz	16QAM	26365	1RB#0	22.13	23.00
Band25	5MHz	16QAM	26365	1RB#12	22.08	23.00
Band25	5MHz	16QAM	26365	1RB#24	22.06	23.00
Band25	5MHz	16QAM	26365	12RB#0	21.09	22.00
Band25	5MHz	16QAM	26365	12RB#6	21.13	22.00
Band25	5MHz	16QAM	26365	12RB#13	21.08	22.00
Band25	5MHz	16QAM	26365	25RB#0	21.14	22.00
Band25	5MHz	QPSK	26665	1RB#0	23.57	24.00
Band25	5MHz	QPSK	26665	1RB#12	23.52	24.00
Band25	5MHz	QPSK	26665	1RB#24	23.42	24.00
Band25	5MHz	QPSK	26665	12RB#0	22.33	23.00
Band25	5MHz	QPSK	26665	12RB#6	22.31	23.00
Band25	5MHz	QPSK	26665	12RB#13	22.30	23.00
Band25	5MHz	QPSK	26665	25RB#0	22.36	23.00
Band25	5MHz	16QAM	26665	1RB#0	22.36	23.00
Band25	5MHz	16QAM	26665	1RB#12	22.28	23.00
Band25	5MHz	16QAM	26665	1RB#24	22.21	23.00
Band25	5MHz	16QAM	26665	12RB#0	21.29	22.00
Band25	5MHz	16QAM	26665	12RB#6	21.31	22.00
Band25	5MHz	16QAM	26665	12RB#13	21.24	22.00
Band25	5MHz	16QAM	26665	25RB#0	21.35	22.00
Band25	10MHz	QPSK	26090	1RB#0	23.17	24.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band25	10MHz	QPSK	26090	1RB#24	23.28	24.00
Band25	10MHz	QPSK	26090	1RB#49	23.24	24.00
Band25	10MHz	QPSK	26090	25RB#0	22.27	23.00
Band25	10MHz	QPSK	26090	25RB#12	22.28	23.00
Band25	10MHz	QPSK	26090	25RB#25	22.25	23.00
Band25	10MHz	QPSK	26090	50RB#0	22.32	23.00
Band25	10MHz	16QAM	26090	1RB#0	21.96	22.00
Band25	10MHz	16QAM	26090	1RB#24	22.03	23.00
Band25	10MHz	16QAM	26090	1RB#49	22.05	23.00
Band25	10MHz	16QAM	26090	25RB#0	21.28	22.00
Band25	10MHz	16QAM	26090	25RB#12	21.32	22.00
Band25	10MHz	16QAM	26090	25RB#25	21.30	22.00
Band25	10MHz	16QAM	26090	50RB#0	21.29	22.00
Band25	10MHz	QPSK	26365	1RB#0	23.22	24.00
Band25	10MHz	QPSK	26365	1RB#24	23.23	24.00
Band25	10MHz	QPSK	26365	1RB#49	23.18	24.00
Band25	10MHz	QPSK	26365	25RB#0	22.12	23.00
Band25	10MHz	QPSK	26365	25RB#12	22.08	23.00
Band25	10MHz	QPSK	26365	25RB#25	22.14	23.00
Band25	10MHz	QPSK	26365	50RB#0	22.14	23.00
Band25	10MHz	16QAM	26365	1RB#0	22.17	23.00
Band25	10MHz	16QAM	26365	1RB#24	22.21	23.00
Band25	10MHz	16QAM	26365	1RB#49	22.15	23.00
Band25	10MHz	16QAM	26365	25RB#0	21.11	22.00
Band25	10MHz	16QAM	26365	25RB#12	21.11	22.00
Band25	10MHz	16QAM	26365	25RB#25	21.15	22.00
Band25	10MHz	16QAM	26365	50RB#0	21.11	22.00
Band25	10MHz	QPSK	26640	1RB#0	23.53	24.00
Band25	10MHz	QPSK	26640	1RB#24	23.51	24.00
Band25	10MHz	QPSK	26640	1RB#49	23.31	24.00
Band25	10MHz	QPSK	26640	25RB#0	22.47	23.00
Band25	10MHz	QPSK	26640	25RB#12	22.47	23.00
Band25	10MHz	QPSK	26640	25RB#25	22.43	23.00
Band25	10MHz	QPSK	26640	50RB#0	22.45	23.00
Band25	10MHz	16QAM	26640	1RB#0	22.48	23.00
Band25	10MHz	16QAM	26640	1RB#24	22.47	23.00
Band25	10MHz	16QAM	26640	1RB#49	22.28	23.00
Band25	10MHz	16QAM	26640	25RB#0	21.44	22.00
Band25	10MHz	16QAM	26640	25RB#12	21.44	22.00
Band25	10MHz	16QAM	26640	25RB#25	21.39	22.00
Band25	10MHz	16QAM	26640	50RB#0	21.46	22.00
Band25	15MHz	QPSK	26115	1RB#0	23.19	24.00
Band25	15MHz	QPSK	26115	1RB#38	23.33	24.00
Band25	15MHz	QPSK	26115	1RB#74	23.28	24.00
Band25	15MHz	QPSK	26115	38RB#0	22.18	23.00
Band25	15MHz	QPSK	26115	38RB#18	22.33	23.00
Band25	15MHz	QPSK	26115	38RB#37	22.26	23.00
Band25	15MHz	QPSK	26115	75RB#0	22.33	23.00
Band25	15MHz	16QAM	26115	1RB#0	22.16	23.00
Band25	15MHz	16QAM	26115	1RB#38	22.30	23.00
Band25	15MHz	16QAM	26115	1RB#74	22.26	23.00
Band25	15MHz	16QAM	26115	38RB#0	22.21	23.00
Band25	15MHz	16QAM	26115	38RB#18	22.33	23.00
Band25	15MHz	16QAM	26115	38RB#37	22.24	23.00
Band25	15MHz	16QAM	26115	75RB#0	21.23	22.00
Band25	15MHz	QPSK	26365	1RB#0	23.18	24.00
Band25	15MHz	QPSK	26365	1RB#38	23.20	24.00
Band25	15MHz	QPSK	26365	1RB#74	23.10	24.00
Band25	15MHz	QPSK	26365	38RB#0	22.22	23.00
Band25	15MHz	QPSK	26365	38RB#18	22.22	23.00
Band25	15MHz	QPSK	26365	38RB#37	22.07	23.00
Band25	15MHz	QPSK	26365	75RB#0	22.15	23.00
Band25	15MHz	16QAM	26365	1RB#0	22.22	23.00
Band25	15MHz	16QAM	26365	1RB#38	22.21	23.00
Band25	15MHz	16QAM	26365	1RB#74	22.15	23.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band25	15MHz	16QAM	26365	38RB#0	22.21	23.00
Band25	15MHz	16QAM	26365	38RB#18	22.22	23.00
Band25	15MHz	16QAM	26365	38RB#37	22.10	23.00
Band25	15MHz	16QAM	26365	75RB#0	21.11	22.00
Band25	15MHz	QPSK	26615	1RB#0	23.54	24.00
Band25	15MHz	QPSK	26615	1RB#38	23.53	24.00
Band25	15MHz	QPSK	26615	1RB#74	23.26	24.00
Band25	15MHz	QPSK	26615	38RB#0	22.48	23.00
Band25	15MHz	QPSK	26615	38RB#18	22.49	23.00
Band25	15MHz	QPSK	26615	38RB#37	22.28	23.00
Band25	15MHz	QPSK	26615	75RB#0	22.45	23.00
Band25	15MHz	16QAM	26615	1RB#0	22.51	23.00
Band25	15MHz	16QAM	26615	1RB#38	22.49	23.00
Band25	15MHz	16QAM	26615	1RB#74	22.28	23.00
Band25	15MHz	16QAM	26615	38RB#0	22.51	23.00
Band25	15MHz	16QAM	26615	38RB#18	22.49	23.00
Band25	15MHz	16QAM	26615	38RB#37	22.27	23.00
Band25	15MHz	16QAM	26615	75RB#0	21.38	22.00
Band25	20MHz	QPSK	26140	1RB#0	23.19	24.00
Band25	20MHz	QPSK	26140	1RB#49	23.46	24.00
Band25	20MHz	QPSK	26140	1RB#99	23.19	24.00
Band25	20MHz	QPSK	26140	50RB#0	22.28	23.00
Band25	20MHz	QPSK	26140	50RB#25	22.28	23.00
Band25	20MHz	QPSK	26140	50RB#50	22.32	23.00
Band25	20MHz	QPSK	26140	100RB#0	22.30	23.00
Band25	20MHz	16QAM	26140	1RB#0	22.03	23.00
Band25	20MHz	16QAM	26140	1RB#49	22.29	23.00
Band25	20MHz	16QAM	26140	1RB#99	22.04	23.00
Band25	20MHz	16QAM	26140	50RB#0	21.27	22.00
Band25	20MHz	16QAM	26140	50RB#25	21.29	22.00
Band25	20MHz	16QAM	26140	50RB#50	21.26	22.00
Band25	20MHz	16QAM	26140	100RB#0	21.29	22.00
Band25	20MHz	QPSK	26365	1RB#0	23.19	24.00
Band25	20MHz	QPSK	26365	1RB#49	23.25	24.00
Band25	20MHz	QPSK	26365	1RB#99	23.21	24.00
Band25	20MHz	QPSK	26365	50RB#0	22.18	23.00
Band25	20MHz	QPSK	26365	50RB#25	22.20	23.00
Band25	20MHz	QPSK	26365	50RB#50	22.16	23.00
Band25	20MHz	QPSK	26365	100RB#0	22.17	23.00
Band25	20MHz	16QAM	26365	1RB#0	22.00	23.00
Band25	20MHz	16QAM	26365	1RB#49	22.10	23.00
Band25	20MHz	16QAM	26365	1RB#99	22.04	23.00
Band25	20MHz	16QAM	26365	50RB#0	21.21	22.00
Band25	20MHz	16QAM	26365	50RB#25	21.16	22.00
Band25	20MHz	16QAM	26365	50RB#50	21.16	22.00
Band25	20MHz	16QAM	26365	100RB#0	21.16	22.00
Band25	20MHz	QPSK	26590	1RB#0	23.34	24.00
Band25	20MHz	QPSK	26590	1RB#49	23.64	24.00
Band25	20MHz	QPSK	26590	1RB#99	23.31	24.00
Band25	20MHz	QPSK	26590	50RB#0	22.60	23.00
Band25	20MHz	QPSK	26590	50RB#25	22.56	23.00
Band25	20MHz	QPSK	26590	50RB#50	22.44	23.00
Band25	20MHz	QPSK	26590	100RB#0	22.51	23.00
Band25	20MHz	16QAM	26590	1RB#0	22.20	23.00
Band25	20MHz	16QAM	26590	1RB#49	22.37	23.00
Band25	20MHz	16QAM	26590	1RB#99	22.11	23.00
Band25	20MHz	16QAM	26590	50RB#0	21.52	22.00
Band25	20MHz	16QAM	26590	50RB#25	21.54	22.00
Band25	20MHz	16QAM	26590	50RB#50	21.42	22.00
Band25	20MHz	16QAM	26590	100RB#0	21.48	22.00



**7.1.12. Conducted Power Measurement Results(LTE Band 26)**

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Tune Up (dBm)
Band26(814-824)	1.4MHz	QPSK	26697	1RB#0	23.56	24.00
Band26(814-824)	1.4MHz	QPSK	26697	1RB#2	23.56	24.00
Band26(814-824)	1.4MHz	QPSK	26697	1RB#5	23.59	24.00
Band26(814-824)	1.4MHz	QPSK	26697	3RB#0	23.61	24.00
Band26(814-824)	1.4MHz	QPSK	26697	3RB#1	23.61	24.00
Band26(814-824)	1.4MHz	QPSK	26697	3RB#3	23.62	24.00
Band26(814-824)	1.4MHz	QPSK	26697	6RB#0	22.68	23.00
Band26(814-824)	1.4MHz	16QAM	26697	1RB#0	22.45	23.00
Band26(814-824)	1.4MHz	16QAM	26697	1RB#2	22.56	23.00
Band26(814-824)	1.4MHz	16QAM	26697	1RB#5	22.47	23.00
Band26(814-824)	1.4MHz	16QAM	26697	3RB#0	22.46	23.00
Band26(814-824)	1.4MHz	16QAM	26697	3RB#1	22.46	23.00
Band26(814-824)	1.4MHz	16QAM	26697	3RB#3	22.44	23.00
Band26(814-824)	1.4MHz	16QAM	26697	6RB#0	21.69	22.00
Band26(814-824)	1.4MHz	QPSK	26740	1RB#0	23.70	24.00
Band26(814-824)	1.4MHz	QPSK	26740	1RB#2	23.76	24.00
Band26(814-824)	1.4MHz	QPSK	26740	1RB#5	23.85	24.00
Band26(814-824)	1.4MHz	QPSK	26740	3RB#0	23.77	24.00
Band26(814-824)	1.4MHz	QPSK	26740	3RB#1	23.79	24.00
Band26(814-824)	1.4MHz	QPSK	26740	3RB#3	23.84	24.00
Band26(814-824)	1.4MHz	QPSK	26740	6RB#0	22.88	23.00
Band26(814-824)	1.4MHz	16QAM	26740	1RB#0	22.52	23.00
Band26(814-824)	1.4MHz	16QAM	26740	1RB#2	22.55	23.00
Band26(814-824)	1.4MHz	16QAM	26740	1RB#5	22.51	23.00
Band26(814-824)	1.4MHz	16QAM	26740	3RB#0	22.67	23.00
Band26(814-824)	1.4MHz	16QAM	26740	3RB#1	22.75	23.00
Band26(814-824)	1.4MHz	16QAM	26740	3RB#3	22.82	23.00
Band26(814-824)	1.4MHz	16QAM	26740	6RB#0	21.79	22.00
Band26(814-824)	1.4MHz	QPSK	26783	1RB#0	23.94	24.00
Band26(814-824)	1.4MHz	QPSK	26783	1RB#2	23.89	24.00
Band26(814-824)	1.4MHz	QPSK	26783	1RB#5	23.84	24.00
Band26(814-824)	1.4MHz	QPSK	26783	3RB#0	23.92	24.00
Band26(814-824)	1.4MHz	QPSK	26783	3RB#1	23.94	24.00
Band26(814-824)	1.4MHz	QPSK	26783	3RB#3	23.90	24.00
Band26(814-824)	1.4MHz	QPSK	26783	6RB#0	22.95	23.00
Band26(814-824)	1.4MHz	16QAM	26783	1RB#0	22.67	23.00
Band26(814-824)	1.4MHz	16QAM	26783	1RB#2	22.72	23.00
Band26(814-824)	1.4MHz	16QAM	26783	1RB#5	22.67	23.00
Band26(814-824)	1.4MHz	16QAM	26783	3RB#0	22.84	23.00
Band26(814-824)	1.4MHz	16QAM	26783	3RB#1	22.82	23.00
Band26(814-824)	1.4MHz	16QAM	26783	3RB#3	22.75	23.00
Band26(814-824)	1.4MHz	16QAM	26783	6RB#0	21.98	22.00
Band26(814-824)	3MHz	QPSK	26705	1RB#0	23.64	24.00
Band26(814-824)	3MHz	QPSK	26705	1RB#8	23.75	24.00
Band26(814-824)	3MHz	QPSK	26705	1RB#14	23.74	24.00
Band26(814-824)	3MHz	QPSK	26705	8RB#0	22.69	23.00
Band26(814-824)	3MHz	QPSK	26705	8RB#4	22.69	23.00
Band26(814-824)	3MHz	QPSK	26705	8RB#7	22.70	23.00
Band26(814-824)	3MHz	QPSK	26705	15RB#0	22.69	23.00
Band26(814-824)	3MHz	16QAM	26705	1RB#0	22.57	23.00
Band26(814-824)	3MHz	16QAM	26705	1RB#8	22.56	23.00
Band26(814-824)	3MHz	16QAM	26705	1RB#14	22.59	23.00
Band26(814-824)	3MHz	16QAM	26705	8RB#0	21.67	22.00
Band26(814-824)	3MHz	16QAM	26705	8RB#4	21.65	22.00
Band26(814-824)	3MHz	16QAM	26705	8RB#7	21.69	22.00
Band26(814-824)	3MHz	16QAM	26705	15RB#0	21.61	22.00
Band26(814-824)	3MHz	QPSK	26740	1RB#0	23.74	24.00
Band26(814-824)	3MHz	QPSK	26740	1RB#8	23.74	24.00
Band26(814-824)	3MHz	QPSK	26740	1RB#14	23.82	24.00
Band26(814-824)	3MHz	QPSK	26740	8RB#0	22.81	23.00





Band26(814-824)	3MHz	QPSK	26740	8RB#4	22.82	23.00
Band26(814-824)	3MHz	QPSK	26740	8RB#7	22.85	23.00
Band26(814-824)	3MHz	QPSK	26740	15RB#0	22.82	23.00
Band26(814-824)	3MHz	16QAM	26740	1RB#0	22.53	23.00
Band26(814-824)	3MHz	16QAM	26740	1RB#8	22.54	23.00
Band26(814-824)	3MHz	16QAM	26740	1RB#14	22.61	23.00
Band26(814-824)	3MHz	16QAM	26740	8RB#0	21.79	22.00
Band26(814-824)	3MHz	16QAM	26740	8RB#4	21.77	22.00
Band26(814-824)	3MHz	16QAM	26740	8RB#7	21.83	22.00
Band26(814-824)	3MHz	16QAM	26740	15RB#0	21.73	22.00
Band26(814-824)	3MHz	QPSK	26775	1RB#0	24.06	25.00
Band26(814-824)	3MHz	QPSK	26775	1RB#8	24.00	25.00
Band26(814-824)	3MHz	QPSK	26775	1RB#14	24.05	25.00
Band26(814-824)	3MHz	QPSK	26775	8RB#0	22.91	23.00
Band26(814-824)	3MHz	QPSK	26775	8RB#4	22.88	23.00
Band26(814-824)	3MHz	QPSK	26775	8RB#7	22.95	23.00
Band26(814-824)	3MHz	QPSK	26775	15RB#0	22.92	23.00
Band26(814-824)	3MHz	16QAM	26775	1RB#0	22.97	23.00
Band26(814-824)	3MHz	16QAM	26775	1RB#8	23.07	24.00
Band26(814-824)	3MHz	16QAM	26775	1RB#14	23.09	24.00
Band26(814-824)	3MHz	16QAM	26775	8RB#0	21.95	22.00
Band26(814-824)	3MHz	16QAM	26775	8RB#4	21.95	22.00
Band26(814-824)	3MHz	16QAM	26775	8RB#7	21.95	22.00
Band26(814-824)	3MHz	16QAM	26775	15RB#0	21.96	22.00
Band26(814-824)	5MHz	QPSK	26715	1RB#0	23.79	24.00
Band26(814-824)	5MHz	QPSK	26715	1RB#12	23.86	24.00
Band26(814-824)	5MHz	QPSK	26715	1RB#24	23.94	24.00
Band26(814-824)	5MHz	QPSK	26715	12RB#0	22.72	23.00
Band26(814-824)	5MHz	QPSK	26715	12RB#6	22.72	23.00
Band26(814-824)	5MHz	QPSK	26715	12RB#13	22.75	23.00
Band26(814-824)	5MHz	QPSK	26715	25RB#0	22.74	23.00
Band26(814-824)	5MHz	16QAM	26715	1RB#0	22.72	23.00
Band26(814-824)	5MHz	16QAM	26715	1RB#12	22.84	23.00
Band26(814-824)	5MHz	16QAM	26715	1RB#24	22.97	23.00
Band26(814-824)	5MHz	16QAM	26715	12RB#0	21.76	22.00
Band26(814-824)	5MHz	16QAM	26715	12RB#6	21.76	22.00
Band26(814-824)	5MHz	16QAM	26715	12RB#13	21.79	22.00
Band26(814-824)	5MHz	16QAM	26715	25RB#0	21.74	22.00
Band26(814-824)	5MHz	QPSK	26740	1RB#0	23.90	24.00
Band26(814-824)	5MHz	QPSK	26740	1RB#12	24.10	25.00
Band26(814-824)	5MHz	QPSK	26740	1RB#24	24.06	25.00
Band26(814-824)	5MHz	QPSK	26740	12RB#0	22.85	23.00
Band26(814-824)	5MHz	QPSK	26740	12RB#6	22.85	23.00
Band26(814-824)	5MHz	QPSK	26740	12RB#13	22.87	23.00
Band26(814-824)	5MHz	QPSK	26740	25RB#0	22.83	23.00
Band26(814-824)	5MHz	16QAM	26740	1RB#0	22.71	23.00
Band26(814-824)	5MHz	16QAM	26740	1RB#12	22.77	23.00
Band26(814-824)	5MHz	16QAM	26740	1RB#24	22.88	23.00
Band26(814-824)	5MHz	16QAM	26740	12RB#0	21.81	22.00
Band26(814-824)	5MHz	16QAM	26740	12RB#6	21.80	22.00
Band26(814-824)	5MHz	16QAM	26740	12RB#13	21.83	22.00
Band26(814-824)	5MHz	16QAM	26740	25RB#0	21.88	22.00
Band26(814-824)	5MHz	QPSK	26765	1RB#0	23.92	24.00
Band26(814-824)	5MHz	QPSK	26765	1RB#12	24.12	25.00
Band26(814-824)	5MHz	QPSK	26765	1RB#24	24.17	25.00
Band26(814-824)	5MHz	QPSK	26765	12RB#0	22.86	23.00
Band26(814-824)	5MHz	QPSK	26765	12RB#6	22.88	23.00
Band26(814-824)	5MHz	QPSK	26765	12RB#13	22.95	23.00
Band26(814-824)	5MHz	QPSK	26765	25RB#0	22.94	23.00
Band26(814-824)	5MHz	16QAM	26765	1RB#0	22.82	23.00
Band26(814-824)	5MHz	16QAM	26765	1RB#12	22.88	23.00
Band26(814-824)	5MHz	16QAM	26765	1RB#24	22.95	23.00
Band26(814-824)	5MHz	16QAM	26765	12RB#0	21.89	22.00
Band26(814-824)	5MHz	16QAM	26765	12RB#6	21.85	22.00
Band26(814-824)	5MHz	16QAM	26765	12RB#13	21.93	22.00





Band26(814-824)	5MHz	16QAM	26765	25RB#0	21.95	22.00
Band26(814-824)	10MHz	QPSK	26740	1RB#0	23.71	24.00
Band26(814-824)	10MHz	QPSK	26740	1RB#24	23.86	24.00
Band26(814-824)	10MHz	QPSK	26740	1RB#49	24.00	25.00
Band26(814-824)	10MHz	QPSK	26740	25RB#0	22.83	23.00
Band26(814-824)	10MHz	QPSK	26740	25RB#12	22.80	23.00
Band26(814-824)	10MHz	QPSK	26740	25RB#25	22.91	23.00
Band26(814-824)	10MHz	QPSK	26740	50RB#0	22.93	23.00
Band26(814-824)	10MHz	16QAM	26740	1RB#0	22.57	23.00
Band26(814-824)	10MHz	16QAM	26740	1RB#24	22.74	23.00
Band26(814-824)	10MHz	16QAM	26740	1RB#49	22.86	23.00
Band26(814-824)	10MHz	16QAM	26740	25RB#0	21.82	22.00
Band26(814-824)	10MHz	16QAM	26740	25RB#12	21.84	22.00
Band26(814-824)	10MHz	16QAM	26740	25RB#25	21.94	22.00
Band26(814-824)	10MHz	16QAM	26740	50RB#0	21.88	22.00
Band26(824-849)	1.4MHz	QPSK	26797	1RB#0	24.02	25.00
Band26(824-849)	1.4MHz	QPSK	26797	1RB#2	24.10	25.00
Band26(824-849)	1.4MHz	QPSK	26797	1RB#5	24.09	25.00
Band26(824-849)	1.4MHz	QPSK	26797	3RB#0	24.07	25.00
Band26(824-849)	1.4MHz	QPSK	26797	3RB#1	24.07	25.00
Band26(824-849)	1.4MHz	QPSK	26797	3RB#3	24.09	25.00
Band26(824-849)	1.4MHz	QPSK	26797	6RB#0	23.05	24.00
Band26(824-849)	1.4MHz	16QAM	26797	1RB#0	22.94	23.00
Band26(824-849)	1.4MHz	16QAM	26797	1RB#2	22.98	23.00
Band26(824-849)	1.4MHz	16QAM	26797	1RB#5	23.01	24.00
Band26(824-849)	1.4MHz	16QAM	26797	3RB#0	22.93	23.00
Band26(824-849)	1.4MHz	16QAM	26797	3RB#1	22.92	23.00
Band26(824-849)	1.4MHz	16QAM	26797	3RB#3	22.88	23.00
Band26(824-849)	1.4MHz	16QAM	26797	6RB#0	21.86	22.00
Band26(824-849)	1.4MHz	QPSK	26915	1RB#0	23.82	24.00
Band26(824-849)	1.4MHz	QPSK	26915	1RB#2	23.78	24.00
Band26(824-849)	1.4MHz	QPSK	26915	1RB#5	23.87	24.00
Band26(824-849)	1.4MHz	QPSK	26915	3RB#0	23.95	24.00
Band26(824-849)	1.4MHz	QPSK	26915	3RB#1	23.85	24.00
Band26(824-849)	1.4MHz	QPSK	26915	3RB#3	23.86	24.00
Band26(824-849)	1.4MHz	QPSK	26915	6RB#0	22.90	23.00
Band26(824-849)	1.4MHz	16QAM	26915	1RB#0	22.79	23.00
Band26(824-849)	1.4MHz	16QAM	26915	1RB#2	22.71	23.00
Band26(824-849)	1.4MHz	16QAM	26915	1RB#5	22.63	23.00
Band26(824-849)	1.4MHz	16QAM	26915	3RB#0	22.81	23.00
Band26(824-849)	1.4MHz	16QAM	26915	3RB#1	22.84	23.00
Band26(824-849)	1.4MHz	16QAM	26915	3RB#3	22.74	23.00
Band26(824-849)	1.4MHz	16QAM	26915	6RB#0	21.87	22.00
Band26(824-849)	1.4MHz	QPSK	27033	1RB#0	23.68	24.00
Band26(824-849)	1.4MHz	QPSK	27033	1RB#2	23.68	24.00
Band26(824-849)	1.4MHz	QPSK	27033	1RB#5	23.67	24.00
Band26(824-849)	1.4MHz	QPSK	27033	3RB#0	23.73	24.00
Band26(824-849)	1.4MHz	QPSK	27033	3RB#1	23.72	24.00
Band26(824-849)	1.4MHz	QPSK	27033	3RB#3	23.71	24.00
Band26(824-849)	1.4MHz	QPSK	27033	6RB#0	22.82	23.00
Band26(824-849)	1.4MHz	16QAM	27033	1RB#0	22.42	23.00
Band26(824-849)	1.4MHz	16QAM	27033	1RB#2	22.54	23.00
Band26(824-849)	1.4MHz	16QAM	27033	1RB#5	22.50	23.00
Band26(824-849)	1.4MHz	16QAM	27033	3RB#0	22.65	23.00
Band26(824-849)	1.4MHz	16QAM	27033	3RB#1	22.65	23.00
Band26(824-849)	1.4MHz	16QAM	27033	3RB#3	22.61	23.00
Band26(824-849)	1.4MHz	16QAM	27033	6RB#0	21.76	22.00
Band26(824-849)	3MHz	QPSK	26805	1RB#0	24.07	25.00
Band26(824-849)	3MHz	QPSK	26805	1RB#8	24.18	25.00
Band26(824-849)	3MHz	QPSK	26805	1RB#14	24.11	25.00
Band26(824-849)	3MHz	QPSK	26805	8RB#0	22.99	23.00
Band26(824-849)	3MHz	QPSK	26805	8RB#4	22.95	23.00
Band26(824-849)	3MHz	QPSK	26805	8RB#7	23.02	24.00
Band26(824-849)	3MHz	QPSK	26805	15RB#0	23.00	24.00
Band26(824-849)	3MHz	16QAM	26805	1RB#0	23.06	24.00





Band26(824-849)	3MHz	16QAM	26805	1RB#8	23.21	24.00
Band26(824-849)	3MHz	16QAM	26805	1RB#14	23.09	24.00
Band26(824-849)	3MHz	16QAM	26805	8RB#0	22.03	23.00
Band26(824-849)	3MHz	16QAM	26805	8RB#4	22.02	23.00
Band26(824-849)	3MHz	16QAM	26805	8RB#7	22.04	23.00
Band26(824-849)	3MHz	16QAM	26805	15RB#0	21.99	22.00
Band26(824-849)	3MHz	QPSK	26915	1RB#0	24.07	25.00
Band26(824-849)	3MHz	QPSK	26915	1RB#8	23.96	24.00
Band26(824-849)	3MHz	QPSK	26915	1RB#14	23.96	24.00
Band26(824-849)	3MHz	QPSK	26915	8RB#0	22.87	23.00
Band26(824-849)	3MHz	QPSK	26915	8RB#4	22.89	23.00
Band26(824-849)	3MHz	QPSK	26915	8RB#7	22.81	23.00
Band26(824-849)	3MHz	QPSK	26915	15RB#0	22.82	23.00
Band26(824-849)	3MHz	16QAM	26915	1RB#0	22.98	23.00
Band26(824-849)	3MHz	16QAM	26915	1RB#8	23.01	24.00
Band26(824-849)	3MHz	16QAM	26915	1RB#14	22.96	23.00
Band26(824-849)	3MHz	16QAM	26915	8RB#0	21.94	22.00
Band26(824-849)	3MHz	16QAM	26915	8RB#4	21.91	22.00
Band26(824-849)	3MHz	16QAM	26915	8RB#7	21.88	22.00
Band26(824-849)	3MHz	16QAM	26915	15RB#0	21.87	22.00
Band26(824-849)	3MHz	QPSK	27025	1RB#0	23.75	24.00
Band26(824-849)	3MHz	QPSK	27025	1RB#8	23.74	24.00
Band26(824-849)	3MHz	QPSK	27025	1RB#14	23.78	24.00
Band26(824-849)	3MHz	QPSK	27025	8RB#0	22.75	23.00
Band26(824-849)	3MHz	QPSK	27025	8RB#4	22.75	23.00
Band26(824-849)	3MHz	QPSK	27025	8RB#7	22.77	23.00
Band26(824-849)	3MHz	QPSK	27025	15RB#0	22.76	23.00
Band26(824-849)	3MHz	16QAM	27025	1RB#0	22.65	23.00
Band26(824-849)	3MHz	16QAM	27025	1RB#8	22.61	23.00
Band26(824-849)	3MHz	16QAM	27025	1RB#14	22.63	23.00
Band26(824-849)	3MHz	16QAM	27025	8RB#0	21.73	22.00
Band26(824-849)	3MHz	16QAM	27025	8RB#4	21.71	22.00
Band26(824-849)	3MHz	16QAM	27025	8RB#7	21.76	22.00
Band26(824-849)	3MHz	16QAM	27025	15RB#0	21.69	22.00
Band26(824-849)	5MHz	QPSK	26815	1RB#0	24.22	25.00
Band26(824-849)	5MHz	QPSK	26815	1RB#12	24.27	25.00
Band26(824-849)	5MHz	QPSK	26815	1RB#24	24.27	25.00
Band26(824-849)	5MHz	QPSK	26815	12RB#0	23.02	24.00
Band26(824-849)	5MHz	QPSK	26815	12RB#6	23.02	24.00
Band26(824-849)	5MHz	QPSK	26815	12RB#13	23.07	24.00
Band26(824-849)	5MHz	QPSK	26815	25RB#0	23.07	24.00
Band26(824-849)	5MHz	16QAM	26815	1RB#0	22.98	23.00
Band26(824-849)	5MHz	16QAM	26815	1RB#12	22.99	23.00
Band26(824-849)	5MHz	16QAM	26815	1RB#24	22.91	23.00
Band26(824-849)	5MHz	16QAM	26815	12RB#0	22.02	23.00
Band26(824-849)	5MHz	16QAM	26815	12RB#6	22.00	23.00
Band26(824-849)	5MHz	16QAM	26815	12RB#13	22.06	23.00
Band26(824-849)	5MHz	16QAM	26815	25RB#0	22.06	23.00
Band26(824-849)	5MHz	QPSK	26915	1RB#0	24.07	25.00
Band26(824-849)	5MHz	QPSK	26915	1RB#12	24.09	25.00
Band26(824-849)	5MHz	QPSK	26915	1RB#24	24.03	25.00
Band26(824-849)	5MHz	QPSK	26915	12RB#0	22.97	23.00
Band26(824-849)	5MHz	QPSK	26915	12RB#6	22.94	23.00
Band26(824-849)	5MHz	QPSK	26915	12RB#13	22.84	23.00
Band26(824-849)	5MHz	QPSK	26915	25RB#0	22.90	23.00
Band26(824-849)	5MHz	16QAM	26915	1RB#0	22.95	23.00
Band26(824-849)	5MHz	16QAM	26915	1RB#12	22.86	23.00
Band26(824-849)	5MHz	16QAM	26915	1RB#24	22.79	23.00
Band26(824-849)	5MHz	16QAM	26915	12RB#0	21.94	22.00
Band26(824-849)	5MHz	16QAM	26915	12RB#6	21.94	22.00
Band26(824-849)	5MHz	16QAM	26915	12RB#13	21.82	22.00
Band26(824-849)	5MHz	16QAM	26915	25RB#0	21.94	22.00
Band26(824-849)	5MHz	QPSK	27015	1RB#0	23.82	24.00
Band26(824-849)	5MHz	QPSK	27015	1RB#12	23.82	24.00
Band26(824-849)	5MHz	QPSK	27015	1RB#24	23.92	24.00





Band26(824-849)	5MHz	QPSK	27015	12RB#0	22.77	23.00
Band26(824-849)	5MHz	QPSK	27015	12RB#6	22.75	23.00
Band26(824-849)	5MHz	QPSK	27015	12RB#13	22.70	23.00
Band26(824-849)	5MHz	QPSK	27015	25RB#0	22.77	23.00
Band26(824-849)	5MHz	16QAM	27015	1RB#0	22.79	23.00
Band26(824-849)	5MHz	16QAM	27015	1RB#12	22.86	23.00
Band26(824-849)	5MHz	16QAM	27015	1RB#24	22.87	23.00
Band26(824-849)	5MHz	16QAM	27015	12RB#0	21.78	22.00
Band26(824-849)	5MHz	16QAM	27015	12RB#6	21.79	22.00
Band26(824-849)	5MHz	16QAM	27015	12RB#13	21.73	22.00
Band26(824-849)	5MHz	16QAM	27015	25RB#0	21.74	22.00
Band26(824-849)	10MHz	QPSK	26840	1RB#0	24.09	25.00
Band26(824-849)	10MHz	QPSK	26840	1RB#24	24.20	25.00
Band26(824-849)	10MHz	QPSK	26840	1RB#49	24.12	25.00
Band26(824-849)	10MHz	QPSK	26840	25RB#0	23.09	24.00
Band26(824-849)	10MHz	QPSK	26840	25RB#12	23.05	24.00
Band26(824-849)	10MHz	QPSK	26840	25RB#25	23.00	24.00
Band26(824-849)	10MHz	QPSK	26840	50RB#0	23.06	24.00
Band26(824-849)	10MHz	16QAM	26840	1RB#0	23.05	24.00
Band26(824-849)	10MHz	16QAM	26840	1RB#24	23.15	24.00
Band26(824-849)	10MHz	16QAM	26840	1RB#49	23.02	24.00
Band26(824-849)	10MHz	16QAM	26840	25RB#0	22.05	23.00
Band26(824-849)	10MHz	16QAM	26840	25RB#12	22.05	23.00
Band26(824-849)	10MHz	16QAM	26840	25RB#25	22.00	23.00
Band26(824-849)	10MHz	16QAM	26840	50RB#0	22.02	23.00
Band26(824-849)	10MHz	QPSK	26915	1RB#0	24.14	25.00
Band26(824-849)	10MHz	QPSK	26915	1RB#24	24.04	25.00
Band26(824-849)	10MHz	QPSK	26915	1RB#49	23.84	24.00
Band26(824-849)	10MHz	QPSK	26915	25RB#0	23.04	24.00
Band26(824-849)	10MHz	QPSK	26915	25RB#12	23.03	24.00
Band26(824-849)	10MHz	QPSK	26915	25RB#25	22.87	23.00
Band26(824-849)	10MHz	QPSK	26915	50RB#0	22.93	23.00
Band26(824-849)	10MHz	16QAM	26915	1RB#0	23.10	24.00
Band26(824-849)	10MHz	16QAM	26915	1RB#24	23.08	24.00
Band26(824-849)	10MHz	16QAM	26915	1RB#49	22.82	23.00
Band26(824-849)	10MHz	16QAM	26915	25RB#0	22.02	23.00
Band26(824-849)	10MHz	16QAM	26915	25RB#12	22.03	23.00
Band26(824-849)	10MHz	16QAM	26915	25RB#25	21.87	22.00
Band26(824-849)	10MHz	16QAM	26915	50RB#0	21.93	22.00
Band26(824-849)	10MHz	QPSK	26990	1RB#0	23.88	24.00
Band26(824-849)	10MHz	QPSK	26990	1RB#24	23.71	24.00
Band26(824-849)	10MHz	QPSK	26990	1RB#49	23.73	24.00
Band26(824-849)	10MHz	QPSK	26990	25RB#0	22.75	23.00
Band26(824-849)	10MHz	QPSK	26990	25RB#12	22.72	23.00
Band26(824-849)	10MHz	QPSK	26990	25RB#25	22.71	23.00
Band26(824-849)	10MHz	QPSK	26990	50RB#0	22.79	23.00
Band26(824-849)	10MHz	16QAM	26990	1RB#0	22.71	23.00
Band26(824-849)	10MHz	16QAM	26990	1RB#24	22.57	23.00
Band26(824-849)	10MHz	16QAM	26990	1RB#49	22.61	23.00
Band26(824-849)	10MHz	16QAM	26990	25RB#0	21.76	22.00
Band26(824-849)	10MHz	16QAM	26990	25RB#12	21.76	22.00
Band26(824-849)	10MHz	16QAM	26990	25RB#25	21.72	22.00
Band26(824-849)	10MHz	16QAM	26990	50RB#0	21.76	22.00
Band26(824-849)	15MHz	QPSK	26865	1RB#0	24.08	25.00
Band26(824-849)	15MHz	QPSK	26865	1RB#38	24.19	25.00
Band26(824-849)	15MHz	QPSK	26865	1RB#74	23.86	24.00
Band26(824-849)	15MHz	QPSK	26865	38RB#0	23.02	24.00
Band26(824-849)	15MHz	QPSK	26865	38RB#18	23.17	24.00
Band26(824-849)	15MHz	QPSK	26865	38RB#37	22.84	23.00
Band26(824-849)	15MHz	QPSK	26865	75RB#0	22.99	23.00
Band26(824-849)	15MHz	16QAM	26865	1RB#0	23.04	24.00
Band26(824-849)	15MHz	16QAM	26865	1RB#38	23.18	24.00
Band26(824-849)	15MHz	16QAM	26865	1RB#74	22.83	23.00
Band26(824-849)	15MHz	16QAM	26865	38RB#0	23.02	24.00
Band26(824-849)	15MHz	16QAM	26865	38RB#18	23.19	24.00





Band26(824-849)	15MHz	16QAM	26865	38RB#37	22.84	23.00
Band26(824-849)	15MHz	16QAM	26865	75RB#0	21.93	22.00
Band26(824-849)	15MHz	QPSK	26915	1RB#0	24.15	25.00
Band26(824-849)	15MHz	QPSK	26915	1RB#38	24.05	25.00
Band26(824-849)	15MHz	QPSK	26915	1RB#74	23.67	24.00
Band26(824-849)	15MHz	QPSK	26915	38RB#0	23.11	24.00
Band26(824-849)	15MHz	QPSK	26915	38RB#18	23.03	24.00
Band26(824-849)	15MHz	QPSK	26915	38RB#37	22.65	23.00
Band26(824-849)	15MHz	QPSK	26915	75RB#0	22.91	23.00
Band26(824-849)	15MHz	16QAM	26915	1RB#0	23.11	24.00
Band26(824-849)	15MHz	16QAM	26915	1RB#38	23.11	24.00
Band26(824-849)	15MHz	16QAM	26915	1RB#74	22.68	23.00
Band26(824-849)	15MHz	16QAM	26915	38RB#0	23.12	24.00
Band26(824-849)	15MHz	16QAM	26915	38RB#18	23.08	24.00
Band26(824-849)	15MHz	16QAM	26915	38RB#37	22.69	23.00
Band26(824-849)	15MHz	16QAM	26915	75RB#0	21.90	22.00
Band26(824-849)	15MHz	QPSK	26965	1RB#0	23.78	24.00
Band26(824-849)	15MHz	QPSK	26965	1RB#38	23.69	24.00
Band26(824-849)	15MHz	QPSK	26965	1RB#74	23.64	24.00
Band26(824-849)	15MHz	QPSK	26965	38RB#0	22.97	23.00
Band26(824-849)	15MHz	QPSK	26965	38RB#18	22.85	23.00
Band26(824-849)	15MHz	QPSK	26965	38RB#37	22.69	23.00
Band26(824-849)	15MHz	QPSK	26965	75RB#0	22.76	23.00
Band26(824-849)	15MHz	16QAM	26965	1RB#0	22.95	23.00
Band26(824-849)	15MHz	16QAM	26965	1RB#38	22.87	23.00
Band26(824-849)	15MHz	16QAM	26965	1RB#74	22.68	23.00
Band26(824-849)	15MHz	16QAM	26965	38RB#0	22.95	23.00
Band26(824-849)	15MHz	16QAM	26965	38RB#18	22.87	23.00
Band26(824-849)	15MHz	16QAM	26965	38RB#37	22.69	23.00
Band26(824-849)	15MHz	16QAM	26965	75RB#0	21.78	22.00



**7.1.13. Conducted Power Measurement Results(LTE Band 38)**

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Tune Up (dBm)
Band38	5MHz	QPSK	37775	1RB#0	21.69	22.00
Band38	5MHz	QPSK	37775	1RB#12	21.64	22.00
Band38	5MHz	QPSK	37775	1RB#24	21.66	22.00
Band38	5MHz	QPSK	37775	12RB#0	20.72	21.00
Band38	5MHz	QPSK	37775	12RB#6	20.69	21.00
Band38	5MHz	QPSK	37775	12RB#13	20.75	21.00
Band38	5MHz	QPSK	37775	25RB#0	20.79	21.00
Band38	5MHz	16QAM	37775	1RB#0	21.04	22.00
Band38	5MHz	16QAM	37775	1RB#12	21.31	22.00
Band38	5MHz	16QAM	37775	1RB#24	22.04	23.00
Band38	5MHz	16QAM	37775	12RB#0	19.84	20.00
Band38	5MHz	16QAM	37775	12RB#6	19.78	20.00
Band38	5MHz	16QAM	37775	12RB#13	19.70	20.00
Band38	5MHz	16QAM	37775	25RB#0	19.84	20.00
Band38	5MHz	QPSK	38000	1RB#0	21.44	22.00
Band38	5MHz	QPSK	38000	1RB#12	21.52	22.00
Band38	5MHz	QPSK	38000	1RB#24	21.66	22.00
Band38	5MHz	QPSK	38000	12RB#0	20.59	21.00
Band38	5MHz	QPSK	38000	12RB#6	20.59	21.00
Band38	5MHz	QPSK	38000	12RB#13	20.67	21.00
Band38	5MHz	QPSK	38000	25RB#0	20.65	21.00
Band38	5MHz	16QAM	38000	1RB#0	21.69	22.00
Band38	5MHz	16QAM	38000	1RB#12	21.67	22.00
Band38	5MHz	16QAM	38000	1RB#24	21.81	22.00
Band38	5MHz	16QAM	38000	12RB#0	19.62	20.00
Band38	5MHz	16QAM	38000	12RB#6	19.68	20.00
Band38	5MHz	16QAM	38000	12RB#13	19.71	20.00
Band38	5MHz	16QAM	38000	25RB#0	19.88	20.00
Band38	5MHz	QPSK	38225	1RB#0	22.10	23.00
Band38	5MHz	QPSK	38225	1RB#12	22.02	23.00
Band38	5MHz	QPSK	38225	1RB#24	22.06	23.00
Band38	5MHz	QPSK	38225	12RB#0	21.06	22.00
Band38	5MHz	QPSK	38225	12RB#6	21.07	22.00
Band38	5MHz	QPSK	38225	12RB#13	21.07	22.00
Band38	5MHz	QPSK	38225	25RB#0	21.07	22.00
Band38	5MHz	16QAM	38225	1RB#0	21.83	22.00
Band38	5MHz	16QAM	38225	1RB#12	21.86	22.00
Band38	5MHz	16QAM	38225	1RB#24	21.76	22.00
Band38	5MHz	16QAM	38225	12RB#0	20.00	21.00
Band38	5MHz	16QAM	38225	12RB#6	20.06	21.00
Band38	5MHz	16QAM	38225	12RB#13	19.99	20.00
Band38	5MHz	16QAM	38225	25RB#0	20.01	21.00
Band38	10MHz	QPSK	37800	1RB#0	21.93	22.00
Band38	10MHz	QPSK	37800	1RB#24	21.81	22.00
Band38	10MHz	QPSK	37800	1RB#49	21.84	22.00
Band38	10MHz	QPSK	37800	25RB#0	20.74	21.00
Band38	10MHz	QPSK	37800	25RB#12	20.61	21.00
Band38	10MHz	QPSK	37800	25RB#25	20.57	21.00
Band38	10MHz	QPSK	37800	50RB#0	20.72	21.00
Band38	10MHz	16QAM	37800	1RB#0	21.08	22.00
Band38	10MHz	16QAM	37800	1RB#24	21.06	22.00
Band38	10MHz	16QAM	37800	1RB#49	20.93	21.00
Band38	10MHz	16QAM	37800	25RB#0	19.84	20.00
Band38	10MHz	16QAM	37800	25RB#12	19.85	20.00
Band38	10MHz	16QAM	37800	25RB#25	19.75	20.00
Band38	10MHz	16QAM	37800	50RB#0	19.77	20.00
Band38	10MHz	QPSK	38000	1RB#0	21.83	22.00
Band38	10MHz	QPSK	38000	1RB#24	21.88	22.00
Band38	10MHz	QPSK	38000	1RB#49	22.02	23.00
Band38	10MHz	QPSK	38000	25RB#0	20.63	21.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band38	10MHz	QPSK	38000	25RB#12	20.63	21.00
Band38	10MHz	QPSK	38000	25RB#25	20.66	21.00
Band38	10MHz	QPSK	38000	50RB#0	20.65	21.00
Band38	10MHz	16QAM	38000	1RB#0	20.86	21.00
Band38	10MHz	16QAM	38000	1RB#24	21.07	22.00
Band38	10MHz	16QAM	38000	1RB#49	21.01	22.00
Band38	10MHz	16QAM	38000	25RB#0	19.79	20.00
Band38	10MHz	16QAM	38000	25RB#12	19.80	20.00
Band38	10MHz	16QAM	38000	25RB#25	19.97	20.00
Band38	10MHz	16QAM	38000	50RB#0	19.81	20.00
Band38	10MHz	QPSK	38200	1RB#0	22.13	23.00
Band38	10MHz	QPSK	38200	1RB#24	22.15	23.00
Band38	10MHz	QPSK	38200	1RB#49	22.05	23.00
Band38	10MHz	QPSK	38200	25RB#0	21.13	22.00
Band38	10MHz	QPSK	38200	25RB#12	21.14	22.00
Band38	10MHz	QPSK	38200	25RB#25	21.19	22.00
Band38	10MHz	QPSK	38200	50RB#0	21.07	22.00
Band38	10MHz	16QAM	38200	1RB#0	21.12	22.00
Band38	10MHz	16QAM	38200	1RB#24	21.11	22.00
Band38	10MHz	16QAM	38200	1RB#49	20.99	21.00
Band38	10MHz	16QAM	38200	25RB#0	20.49	21.00
Band38	10MHz	16QAM	38200	25RB#12	20.50	21.00
Band38	10MHz	16QAM	38200	25RB#25	20.47	21.00
Band38	10MHz	16QAM	38200	50RB#0	20.12	21.00
Band38	15MHz	QPSK	37825	1RB#0	21.91	22.00
Band38	15MHz	QPSK	37825	1RB#38	21.74	22.00
Band38	15MHz	QPSK	37825	1RB#74	21.74	22.00
Band38	15MHz	QPSK	37825	38RB#0	20.63	21.00
Band38	15MHz	QPSK	37825	38RB#18	20.62	21.00
Band38	15MHz	QPSK	37825	38RB#37	20.61	21.00
Band38	15MHz	QPSK	37825	75RB#0	20.61	21.00
Band38	15MHz	16QAM	37825	1RB#0	21.10	22.00
Band38	15MHz	16QAM	37825	1RB#38	20.98	21.00
Band38	15MHz	16QAM	37825	1RB#74	20.84	21.00
Band38	15MHz	16QAM	37825	38RB#0	20.63	21.00
Band38	15MHz	16QAM	37825	38RB#18	20.62	21.00
Band38	15MHz	16QAM	37825	38RB#37	20.61	21.00
Band38	15MHz	16QAM	37825	75RB#0	19.77	20.00
Band38	15MHz	QPSK	38000	1RB#0	21.72	22.00
Band38	15MHz	QPSK	38000	1RB#38	21.82	22.00
Band38	15MHz	QPSK	38000	1RB#74	22.06	23.00
Band38	15MHz	QPSK	38000	38RB#0	20.82	21.00
Band38	15MHz	QPSK	38000	38RB#18	20.77	21.00
Band38	15MHz	QPSK	38000	38RB#37	20.78	21.00
Band38	15MHz	QPSK	38000	75RB#0	20.80	21.00
Band38	15MHz	16QAM	38000	1RB#0	20.80	21.00
Band38	15MHz	16QAM	38000	1RB#38	20.72	21.00
Band38	15MHz	16QAM	38000	1RB#74	21.12	22.00
Band38	15MHz	16QAM	38000	38RB#0	20.77	21.00
Band38	15MHz	16QAM	38000	38RB#18	20.77	21.00
Band38	15MHz	16QAM	38000	38RB#37	20.80	21.00
Band38	15MHz	16QAM	38000	75RB#0	19.93	20.00
Band38	15MHz	QPSK	38175	1RB#0	22.29	23.00
Band38	15MHz	QPSK	38175	1RB#38	22.37	23.00
Band38	15MHz	QPSK	38175	1RB#74	22.17	23.00
Band38	15MHz	QPSK	38175	38RB#0	21.22	22.00
Band38	15MHz	QPSK	38175	38RB#18	21.21	22.00
Band38	15MHz	QPSK	38175	38RB#37	21.22	22.00
Band38	15MHz	QPSK	38175	75RB#0	21.23	22.00
Band38	15MHz	16QAM	38175	1RB#0	20.32	21.00
Band38	15MHz	16QAM	38175	1RB#38	20.58	21.00
Band38	15MHz	16QAM	38175	1RB#74	20.53	21.00
Band38	15MHz	16QAM	38175	38RB#0	21.21	22.00
Band38	15MHz	16QAM	38175	38RB#18	21.21	22.00
Band38	15MHz	16QAM	38175	38RB#37	21.23	22.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band38	15MHz	16QAM	38175	75RB#0	20.34	21.00
Band38	20MHz	QPSK	37850	1RB#0	21.50	22.00
Band38	20MHz	QPSK	37850	1RB#49	21.38	22.00
Band38	20MHz	QPSK	37850	1RB#99	21.30	22.00
Band38	20MHz	QPSK	37850	50RB#0	20.65	21.00
Band38	20MHz	QPSK	37850	50RB#25	20.67	21.00
Band38	20MHz	QPSK	37850	50RB#50	20.43	21.00
Band38	20MHz	QPSK	37850	100RB#0	20.55	21.00
Band38	20MHz	16QAM	37850	1RB#0	21.16	22.00
Band38	20MHz	16QAM	37850	1RB#49	20.87	21.00
Band38	20MHz	16QAM	37850	1RB#99	21.30	22.00
Band38	20MHz	16QAM	37850	50RB#0	19.79	20.00
Band38	20MHz	16QAM	37850	50RB#25	19.80	20.00
Band38	20MHz	16QAM	37850	50RB#50	19.75	20.00
Band38	20MHz	16QAM	37850	100RB#0	19.65	20.00
Band38	20MHz	QPSK	38000	1RB#0	21.46	22.00
Band38	20MHz	QPSK	38000	1RB#49	21.57	22.00
Band38	20MHz	QPSK	38000	1RB#99	21.87	22.00
Band38	20MHz	QPSK	38000	50RB#0	20.64	21.00
Band38	20MHz	QPSK	38000	50RB#25	20.64	21.00
Band38	20MHz	QPSK	38000	50RB#50	20.83	21.00
Band38	20MHz	QPSK	38000	100RB#0	20.74	21.00
Band38	20MHz	16QAM	38000	1RB#0	20.33	21.00
Band38	20MHz	16QAM	38000	1RB#49	20.58	21.00
Band38	20MHz	16QAM	38000	1RB#99	20.80	21.00
Band38	20MHz	16QAM	38000	50RB#0	20.04	21.00
Band38	20MHz	16QAM	38000	50RB#25	20.04	21.00
Band38	20MHz	16QAM	38000	50RB#50	20.15	21.00
Band38	20MHz	16QAM	38000	100RB#0	19.83	20.00
Band38	20MHz	QPSK	38150	1RB#0	22.23	23.00
Band38	20MHz	QPSK	38150	1RB#49	22.06	23.00
Band38	20MHz	QPSK	38150	1RB#99	22.50	23.00
Band38	20MHz	QPSK	38150	50RB#0	21.06	22.00
Band38	20MHz	QPSK	38150	50RB#25	21.07	22.00
Band38	20MHz	QPSK	38150	50RB#50	21.10	22.00
Band38	20MHz	QPSK	38150	100RB#0	21.09	22.00
Band38	20MHz	16QAM	38150	1RB#0	21.47	22.00
Band38	20MHz	16QAM	38150	1RB#49	21.48	22.00
Band38	20MHz	16QAM	38150	1RB#99	21.42	22.00
Band38	20MHz	16QAM	38150	50RB#0	20.17	21.00
Band38	20MHz	16QAM	38150	50RB#25	20.18	21.00
Band38	20MHz	16QAM	38150	50RB#50	20.21	21.00
Band38	20MHz	16QAM	38150	100RB#0	20.15	21.00



**7.1.14. Conducted Power Measurement Results(LTE Band 41)**

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Tune Up (dBm)
Band41(2535-2655)	5MHz	QPSK	40065	1RB#0	20.99	21.00
Band41(2535-2655)	5MHz	QPSK	40065	1RB#12	20.87	21.00
Band41(2535-2655)	5MHz	QPSK	40065	1RB#24	20.85	21.00
Band41(2535-2655)	5MHz	QPSK	40065	12RB#0	20.18	21.00
Band41(2535-2655)	5MHz	QPSK	40065	12RB#6	20.19	21.00
Band41(2535-2655)	5MHz	QPSK	40065	12RB#13	20.09	21.00
Band41(2535-2655)	5MHz	QPSK	40065	25RB#0	20.11	21.00
Band41(2535-2655)	5MHz	16QAM	40065	1RB#0	20.84	21.00
Band41(2535-2655)	5MHz	16QAM	40065	1RB#12	20.71	21.00
Band41(2535-2655)	5MHz	16QAM	40065	1RB#24	20.54	21.00
Band41(2535-2655)	5MHz	16QAM	40065	12RB#0	19.14	20.00
Band41(2535-2655)	5MHz	16QAM	40065	12RB#6	19.15	20.00
Band41(2535-2655)	5MHz	16QAM	40065	12RB#13	19.17	20.00
Band41(2535-2655)	5MHz	16QAM	40065	25RB#0	19.25	20.00
Band41(2535-2655)	5MHz	QPSK	40590	1RB#0	21.23	22.00
Band41(2535-2655)	5MHz	QPSK	40590	1RB#12	21.25	22.00
Band41(2535-2655)	5MHz	QPSK	40590	1RB#24	21.34	22.00
Band41(2535-2655)	5MHz	QPSK	40590	12RB#0	20.60	21.00
Band41(2535-2655)	5MHz	QPSK	40590	12RB#6	20.61	21.00
Band41(2535-2655)	5MHz	QPSK	40590	12RB#13	20.62	21.00
Band41(2535-2655)	5MHz	QPSK	40590	25RB#0	20.63	21.00
Band41(2535-2655)	5MHz	16QAM	40590	1RB#0	21.49	22.00
Band41(2535-2655)	5MHz	16QAM	40590	1RB#12	21.37	22.00
Band41(2535-2655)	5MHz	16QAM	40590	1RB#24	21.51	22.00
Band41(2535-2655)	5MHz	16QAM	40590	12RB#0	19.55	20.00
Band41(2535-2655)	5MHz	16QAM	40590	12RB#6	19.56	20.00
Band41(2535-2655)	5MHz	16QAM	40590	12RB#13	19.56	20.00
Band41(2535-2655)	5MHz	16QAM	40590	25RB#0	19.59	20.00
Band41(2535-2655)	5MHz	QPSK	41215	1RB#0	21.91	22.00
Band41(2535-2655)	5MHz	QPSK	41215	1RB#12	21.80	22.00
Band41(2535-2655)	5MHz	QPSK	41215	1RB#24	21.82	22.00
Band41(2535-2655)	5MHz	QPSK	41215	12RB#0	21.16	22.00
Band41(2535-2655)	5MHz	QPSK	41215	12RB#6	21.19	22.00
Band41(2535-2655)	5MHz	QPSK	41215	12RB#13	21.21	22.00
Band41(2535-2655)	5MHz	QPSK	41215	25RB#0	21.14	22.00
Band41(2535-2655)	5MHz	16QAM	41215	1RB#0	21.58	22.00
Band41(2535-2655)	5MHz	16QAM	41215	1RB#12	21.45	22.00
Band41(2535-2655)	5MHz	16QAM	41215	1RB#24	21.52	22.00
Band41(2535-2655)	5MHz	16QAM	41215	12RB#0	20.21	21.00
Band41(2535-2655)	5MHz	16QAM	41215	12RB#6	20.22	21.00
Band41(2535-2655)	5MHz	16QAM	41215	12RB#13	20.23	21.00
Band41(2535-2655)	5MHz	16QAM	41215	25RB#0	20.36	21.00
Band41(2535-2655)	10MHz	QPSK	40090	1RB#0	21.25	22.00
Band41(2535-2655)	10MHz	QPSK	40090	1RB#24	21.19	22.00
Band41(2535-2655)	10MHz	QPSK	40090	1RB#49	21.13	22.00
Band41(2535-2655)	10MHz	QPSK	40090	25RB#0	20.26	21.00
Band41(2535-2655)	10MHz	QPSK	40090	25RB#12	20.28	21.00
Band41(2535-2655)	10MHz	QPSK	40090	25RB#25	20.12	21.00
Band41(2535-2655)	10MHz	QPSK	40090	50RB#0	20.19	21.00
Band41(2535-2655)	10MHz	16QAM	40090	1RB#0	20.98	21.00
Band41(2535-2655)	10MHz	16QAM	40090	1RB#24	20.85	21.00
Band41(2535-2655)	10MHz	16QAM	40090	1RB#49	20.75	21.00
Band41(2535-2655)	10MHz	16QAM	40090	25RB#0	19.35	20.00
Band41(2535-2655)	10MHz	16QAM	40090	25RB#12	19.37	20.00
Band41(2535-2655)	10MHz	16QAM	40090	25RB#25	19.14	20.00
Band41(2535-2655)	10MHz	16QAM	40090	50RB#0	19.25	20.00
Band41(2535-2655)	10MHz	QPSK	40590	1RB#0	21.39	22.00
Band41(2535-2655)	10MHz	QPSK	40590	1RB#24	21.36	22.00
Band41(2535-2655)	10MHz	QPSK	40590	1RB#49	21.18	22.00
Band41(2535-2655)	10MHz	QPSK	40590	25RB#0	20.56	21.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band41(2535-2655)	10MHz	QPSK	40590	25RB#12	20.42	21.00
Band41(2535-2655)	10MHz	QPSK	40590	25RB#25	20.62	21.00
Band41(2535-2655)	10MHz	QPSK	40590	50RB#0	20.63	21.00
Band41(2535-2655)	10MHz	16QAM	40590	1RB#0	20.62	21.00
Band41(2535-2655)	10MHz	16QAM	40590	1RB#24	20.29	21.00
Band41(2535-2655)	10MHz	16QAM	40590	1RB#49	20.47	21.00
Band41(2535-2655)	10MHz	16QAM	40590	25RB#0	19.71	20.00
Band41(2535-2655)	10MHz	16QAM	40590	25RB#12	19.73	20.00
Band41(2535-2655)	10MHz	16QAM	40590	25RB#25	19.78	20.00
Band41(2535-2655)	10MHz	16QAM	40590	50RB#0	19.68	20.00
Band41(2535-2655)	10MHz	QPSK	41190	1RB#0	22.01	23.00
Band41(2535-2655)	10MHz	QPSK	41190	1RB#24	22.10	23.00
Band41(2535-2655)	10MHz	QPSK	41190	1RB#49	22.10	23.00
Band41(2535-2655)	10MHz	QPSK	41190	25RB#0	21.30	22.00
Band41(2535-2655)	10MHz	QPSK	41190	25RB#12	21.21	22.00
Band41(2535-2655)	10MHz	QPSK	41190	25RB#25	21.19	22.00
Band41(2535-2655)	10MHz	QPSK	41190	50RB#0	21.19	22.00
Band41(2535-2655)	10MHz	16QAM	41190	1RB#0	22.15	23.00
Band41(2535-2655)	10MHz	16QAM	41190	1RB#24	22.23	23.00
Band41(2535-2655)	10MHz	16QAM	41190	1RB#49	22.06	23.00
Band41(2535-2655)	10MHz	16QAM	41190	25RB#0	20.51	21.00
Band41(2535-2655)	10MHz	16QAM	41190	25RB#12	20.52	21.00
Band41(2535-2655)	10MHz	16QAM	41190	25RB#25	20.50	21.00
Band41(2535-2655)	10MHz	16QAM	41190	50RB#0	20.48	21.00
Band41(2535-2655)	15MHz	QPSK	40115	1RB#0	21.20	22.00
Band41(2535-2655)	15MHz	QPSK	40115	1RB#38	21.11	22.00
Band41(2535-2655)	15MHz	QPSK	40115	1RB#74	21.04	22.00
Band41(2535-2655)	15MHz	QPSK	40115	38RB#0	20.15	21.00
Band41(2535-2655)	15MHz	QPSK	40115	38RB#18	20.11	21.00
Band41(2535-2655)	15MHz	QPSK	40115	38RB#37	20.11	21.00
Band41(2535-2655)	15MHz	QPSK	40115	75RB#0	20.10	21.00
Band41(2535-2655)	15MHz	16QAM	40115	1RB#0	20.89	21.00
Band41(2535-2655)	15MHz	16QAM	40115	1RB#38	20.81	21.00
Band41(2535-2655)	15MHz	16QAM	40115	1RB#74	20.80	21.00
Band41(2535-2655)	15MHz	16QAM	40115	38RB#0	20.12	21.00
Band41(2535-2655)	15MHz	16QAM	40115	38RB#18	20.11	21.00
Band41(2535-2655)	15MHz	16QAM	40115	38RB#37	20.11	21.00
Band41(2535-2655)	15MHz	16QAM	40115	75RB#0	19.19	20.00
Band41(2535-2655)	15MHz	QPSK	40590	1RB#0	21.51	22.00
Band41(2535-2655)	15MHz	QPSK	40590	1RB#38	21.16	22.00
Band41(2535-2655)	15MHz	QPSK	40590	1RB#74	21.43	22.00
Band41(2535-2655)	15MHz	QPSK	40590	38RB#0	20.55	21.00
Band41(2535-2655)	15MHz	QPSK	40590	38RB#18	20.54	21.00
Band41(2535-2655)	15MHz	QPSK	40590	38RB#37	20.54	21.00
Band41(2535-2655)	15MHz	QPSK	40590	75RB#0	20.54	21.00
Band41(2535-2655)	15MHz	16QAM	40590	1RB#0	19.95	20.00
Band41(2535-2655)	15MHz	16QAM	40590	1RB#38	20.46	21.00
Band41(2535-2655)	15MHz	16QAM	40590	1RB#74	20.45	21.00
Band41(2535-2655)	15MHz	16QAM	40590	38RB#0	20.55	21.00
Band41(2535-2655)	15MHz	16QAM	40590	38RB#18	20.54	21.00
Band41(2535-2655)	15MHz	16QAM	40590	38RB#37	20.54	21.00
Band41(2535-2655)	15MHz	16QAM	40590	75RB#0	19.71	20.00
Band41(2535-2655)	15MHz	QPSK	41165	1RB#0	21.88	22.00
Band41(2535-2655)	15MHz	QPSK	41165	1RB#38	21.86	22.00
Band41(2535-2655)	15MHz	QPSK	41165	1RB#74	21.82	22.00
Band41(2535-2655)	15MHz	QPSK	41165	38RB#0	21.19	22.00
Band41(2535-2655)	15MHz	QPSK	41165	38RB#18	21.20	22.00
Band41(2535-2655)	15MHz	QPSK	41165	38RB#37	21.16	22.00
Band41(2535-2655)	15MHz	QPSK	41165	75RB#0	21.16	22.00
Band41(2535-2655)	15MHz	16QAM	41165	1RB#0	21.61	22.00
Band41(2535-2655)	15MHz	16QAM	41165	1RB#38	22.10	23.00
Band41(2535-2655)	15MHz	16QAM	41165	1RB#74	21.53	22.00
Band41(2535-2655)	15MHz	16QAM	41165	38RB#0	21.19	22.00
Band41(2535-2655)	15MHz	16QAM	41165	38RB#18	21.20	22.00
Band41(2535-2655)	15MHz	16QAM	41165	38RB#37	21.16	22.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band41(2535-2655)	15MHz	16QAM	41165	75RB#0	20.32	21.00
Band41(2535-2655)	20MHz	QPSK	40140	1RB#0	21.07	22.00
Band41(2535-2655)	20MHz	QPSK	40140	1RB#49	20.69	21.00
Band41(2535-2655)	20MHz	QPSK	40140	1RB#99	20.80	21.00
Band41(2535-2655)	20MHz	QPSK	40140	50RB#0	20.16	21.00
Band41(2535-2655)	20MHz	QPSK	40140	50RB#25	20.19	21.00
Band41(2535-2655)	20MHz	QPSK	40140	50RB#50	19.98	20.00
Band41(2535-2655)	20MHz	QPSK	40140	100RB#0	20.08	21.00
Band41(2535-2655)	20MHz	16QAM	40140	1RB#0	21.21	22.00
Band41(2535-2655)	20MHz	16QAM	40140	1RB#49	21.00	22.00
Band41(2535-2655)	20MHz	16QAM	40140	1RB#99	21.11	22.00
Band41(2535-2655)	20MHz	16QAM	40140	50RB#0	19.25	20.00
Band41(2535-2655)	20MHz	16QAM	40140	50RB#25	19.26	20.00
Band41(2535-2655)	20MHz	16QAM	40140	50RB#50	19.23	20.00
Band41(2535-2655)	20MHz	16QAM	40140	100RB#0	19.31	20.00
Band41(2535-2655)	20MHz	QPSK	40590	1RB#0	21.54	22.00
Band41(2535-2655)	20MHz	QPSK	40590	1RB#49	21.30	22.00
Band41(2535-2655)	20MHz	QPSK	40590	1RB#99	21.90	22.00
Band41(2535-2655)	20MHz	QPSK	40590	50RB#0	20.54	21.00
Band41(2535-2655)	20MHz	QPSK	40590	50RB#25	20.54	21.00
Band41(2535-2655)	20MHz	QPSK	40590	50RB#50	20.80	21.00
Band41(2535-2655)	20MHz	QPSK	40590	100RB#0	20.55	21.00
Band41(2535-2655)	20MHz	16QAM	40590	1RB#0	20.85	21.00
Band41(2535-2655)	20MHz	16QAM	40590	1RB#49	20.83	21.00
Band41(2535-2655)	20MHz	16QAM	40590	1RB#99	21.07	22.00
Band41(2535-2655)	20MHz	16QAM	40590	50RB#0	19.70	20.00
Band41(2535-2655)	20MHz	16QAM	40590	50RB#25	19.68	20.00
Band41(2535-2655)	20MHz	16QAM	40590	50RB#50	19.90	20.00
Band41(2535-2655)	20MHz	16QAM	40590	100RB#0	19.83	20.00
Band41(2535-2655)	20MHz	QPSK	41140	1RB#0	21.76	22.00
Band41(2535-2655)	20MHz	QPSK	41140	1RB#49	21.87	22.00
Band41(2535-2655)	20MHz	QPSK	41140	1RB#99	21.82	22.00
Band41(2535-2655)	20MHz	QPSK	41140	50RB#0	21.12	22.00
Band41(2535-2655)	20MHz	QPSK	41140	50RB#25	21.14	22.00
Band41(2535-2655)	20MHz	QPSK	41140	50RB#50	21.24	22.00
Band41(2535-2655)	20MHz	QPSK	41140	100RB#0	21.06	22.00
Band41(2535-2655)	20MHz	16QAM	41140	1RB#0	20.57	21.00
Band41(2535-2655)	20MHz	16QAM	41140	1RB#49	20.68	21.00
Band41(2535-2655)	20MHz	16QAM	41140	1RB#99	20.82	21.00
Band41(2535-2655)	20MHz	16QAM	41140	50RB#0	20.30	21.00
Band41(2535-2655)	20MHz	16QAM	41140	50RB#25	20.31	21.00
Band41(2535-2655)	20MHz	16QAM	41140	50RB#50	20.36	21.00
Band41(2535-2655)	20MHz	16QAM	41140	100RB#0	20.36	21.00



**7.1.15. Conducted Power Measurement Results(LTE Band 66)**

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Tune Up (dBm)
Band66	1.4MHz	QPSK	131979	1RB#0	23.38	24.00
Band66	1.4MHz	QPSK	131979	1RB#2	23.31	24.00
Band66	1.4MHz	QPSK	131979	1RB#5	23.33	24.00
Band66	1.4MHz	QPSK	131979	3RB#0	23.43	24.00
Band66	1.4MHz	QPSK	131979	3RB#1	23.44	24.00
Band66	1.4MHz	QPSK	131979	3RB#3	23.39	24.00
Band66	1.4MHz	QPSK	131979	6RB#0	22.38	23.00
Band66	1.4MHz	16QAM	131979	1RB#0	22.26	23.00
Band66	1.4MHz	16QAM	131979	1RB#2	22.28	23.00
Band66	1.4MHz	16QAM	131979	1RB#5	22.26	23.00
Band66	1.4MHz	16QAM	131979	3RB#0	22.23	23.00
Band66	1.4MHz	16QAM	131979	3RB#1	22.22	23.00
Band66	1.4MHz	16QAM	131979	3RB#3	22.24	23.00
Band66	1.4MHz	16QAM	131979	6RB#0	21.22	22.00
Band66	1.4MHz	QPSK	132322	1RB#0	23.22	24.00
Band66	1.4MHz	QPSK	132322	1RB#2	23.21	24.00
Band66	1.4MHz	QPSK	132322	1RB#5	23.16	24.00
Band66	1.4MHz	QPSK	132322	3RB#0	23.27	24.00
Band66	1.4MHz	QPSK	132322	3RB#1	23.28	24.00
Band66	1.4MHz	QPSK	132322	3RB#3	23.21	24.00
Band66	1.4MHz	QPSK	132322	6RB#0	22.33	23.00
Band66	1.4MHz	16QAM	132322	1RB#0	22.19	23.00
Band66	1.4MHz	16QAM	132322	1RB#2	22.16	23.00
Band66	1.4MHz	16QAM	132322	1RB#5	22.13	23.00
Band66	1.4MHz	16QAM	132322	3RB#0	22.10	23.00
Band66	1.4MHz	16QAM	132322	3RB#1	22.12	23.00
Band66	1.4MHz	16QAM	132322	3RB#3	22.05	23.00
Band66	1.4MHz	16QAM	132322	6RB#0	21.30	22.00
Band66	1.4MHz	QPSK	132665	1RB#0	23.47	24.00
Band66	1.4MHz	QPSK	132665	1RB#2	23.47	24.00
Band66	1.4MHz	QPSK	132665	1RB#5	23.49	24.00
Band66	1.4MHz	QPSK	132665	3RB#0	23.55	24.00
Band66	1.4MHz	QPSK	132665	3RB#1	23.56	24.00
Band66	1.4MHz	QPSK	132665	3RB#3	23.56	24.00
Band66	1.4MHz	QPSK	132665	6RB#0	22.50	23.00
Band66	1.4MHz	16QAM	132665	1RB#0	22.38	23.00
Band66	1.4MHz	16QAM	132665	1RB#2	22.40	23.00
Band66	1.4MHz	16QAM	132665	1RB#5	22.41	23.00
Band66	1.4MHz	16QAM	132665	3RB#0	22.35	23.00
Band66	1.4MHz	16QAM	132665	3RB#1	22.36	23.00
Band66	1.4MHz	16QAM	132665	3RB#3	22.36	23.00
Band66	1.4MHz	16QAM	132665	6RB#0	21.33	22.00
Band66	3MHz	QPSK	131987	1RB#0	23.51	24.00
Band66	3MHz	QPSK	131987	1RB#8	23.45	24.00
Band66	3MHz	QPSK	131987	1RB#14	23.47	24.00
Band66	3MHz	QPSK	131987	8RB#0	22.39	23.00
Band66	3MHz	QPSK	131987	8RB#4	22.38	23.00
Band66	3MHz	QPSK	131987	8RB#7	22.34	23.00
Band66	3MHz	QPSK	131987	15RB#0	22.38	23.00
Band66	3MHz	16QAM	131987	1RB#0	22.50	23.00
Band66	3MHz	16QAM	131987	1RB#8	22.42	23.00
Band66	3MHz	16QAM	131987	1RB#14	22.50	23.00
Band66	3MHz	16QAM	131987	8RB#0	21.42	22.00
Band66	3MHz	16QAM	131987	8RB#4	21.40	22.00
Band66	3MHz	16QAM	131987	8RB#7	21.37	22.00
Band66	3MHz	16QAM	131987	15RB#0	21.40	22.00
Band66	3MHz	QPSK	132322	1RB#0	23.40	24.00
Band66	3MHz	QPSK	132322	1RB#8	23.36	24.00
Band66	3MHz	QPSK	132322	1RB#14	23.31	24.00
Band66	3MHz	QPSK	132322	8RB#0	22.27	23.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band66	3MHz	QPSK	132322	8RB#4	22.32	23.00
Band66	3MHz	QPSK	132322	8RB#7	22.24	23.00
Band66	3MHz	QPSK	132322	15RB#0	22.24	23.00
Band66	3MHz	16QAM	132322	1RB#0	22.38	23.00
Band66	3MHz	16QAM	132322	1RB#8	22.38	23.00
Band66	3MHz	16QAM	132322	1RB#14	22.28	23.00
Band66	3MHz	16QAM	132322	8RB#0	21.32	22.00
Band66	3MHz	16QAM	132322	8RB#4	21.32	22.00
Band66	3MHz	16QAM	132322	8RB#7	21.23	22.00
Band66	3MHz	16QAM	132322	15RB#0	21.25	22.00
Band66	3MHz	QPSK	132657	1RB#0	23.46	24.00
Band66	3MHz	QPSK	132657	1RB#8	23.46	24.00
Band66	3MHz	QPSK	132657	1RB#14	23.46	24.00
Band66	3MHz	QPSK	132657	8RB#0	22.48	23.00
Band66	3MHz	QPSK	132657	8RB#4	22.45	23.00
Band66	3MHz	QPSK	132657	8RB#7	22.45	23.00
Band66	3MHz	QPSK	132657	15RB#0	22.44	23.00
Band66	3MHz	16QAM	132657	1RB#0	22.34	23.00
Band66	3MHz	16QAM	132657	1RB#8	22.32	23.00
Band66	3MHz	16QAM	132657	1RB#14	22.31	23.00
Band66	3MHz	16QAM	132657	8RB#0	21.41	22.00
Band66	3MHz	16QAM	132657	8RB#4	21.40	22.00
Band66	3MHz	16QAM	132657	8RB#7	21.44	22.00
Band66	3MHz	16QAM	132657	15RB#0	21.41	22.00
Band66	5MHz	QPSK	131997	1RB#0	23.61	24.00
Band66	5MHz	QPSK	131997	1RB#12	23.59	24.00
Band66	5MHz	QPSK	131997	1RB#24	23.55	24.00
Band66	5MHz	QPSK	131997	12RB#0	22.38	23.00
Band66	5MHz	QPSK	131997	12RB#6	22.38	23.00
Band66	5MHz	QPSK	131997	12RB#13	22.34	23.00
Band66	5MHz	QPSK	131997	25RB#0	22.35	23.00
Band66	5MHz	16QAM	131997	1RB#0	22.37	23.00
Band66	5MHz	16QAM	131997	1RB#12	22.38	23.00
Band66	5MHz	16QAM	131997	1RB#24	22.32	23.00
Band66	5MHz	16QAM	131997	12RB#0	21.35	22.00
Band66	5MHz	16QAM	131997	12RB#6	21.35	22.00
Band66	5MHz	16QAM	131997	12RB#13	21.31	22.00
Band66	5MHz	16QAM	131997	25RB#0	21.35	22.00
Band66	5MHz	QPSK	132322	1RB#0	23.58	24.00
Band66	5MHz	QPSK	132322	1RB#12	23.49	24.00
Band66	5MHz	QPSK	132322	1RB#24	23.41	24.00
Band66	5MHz	QPSK	132322	12RB#0	22.31	23.00
Band66	5MHz	QPSK	132322	12RB#6	22.34	23.00
Band66	5MHz	QPSK	132322	12RB#13	22.21	23.00
Band66	5MHz	QPSK	132322	25RB#0	22.28	23.00
Band66	5MHz	16QAM	132322	1RB#0	22.34	23.00
Band66	5MHz	16QAM	132322	1RB#12	22.24	23.00
Band66	5MHz	16QAM	132322	1RB#24	22.17	23.00
Band66	5MHz	16QAM	132322	12RB#0	21.32	22.00
Band66	5MHz	16QAM	132322	12RB#6	21.32	22.00
Band66	5MHz	16QAM	132322	12RB#13	21.18	22.00
Band66	5MHz	16QAM	132322	25RB#0	21.26	22.00
Band66	5MHz	QPSK	132647	1RB#0	23.53	24.00
Band66	5MHz	QPSK	132647	1RB#12	23.55	24.00
Band66	5MHz	QPSK	132647	1RB#24	23.56	24.00
Band66	5MHz	QPSK	132647	12RB#0	22.48	23.00
Band66	5MHz	QPSK	132647	12RB#6	22.47	23.00
Band66	5MHz	QPSK	132647	12RB#13	22.43	23.00
Band66	5MHz	QPSK	132647	25RB#0	22.44	23.00
Band66	5MHz	16QAM	132647	1RB#0	22.42	23.00
Band66	5MHz	16QAM	132647	1RB#12	22.50	23.00
Band66	5MHz	16QAM	132647	1RB#24	22.53	23.00
Band66	5MHz	16QAM	132647	12RB#0	21.52	22.00
Band66	5MHz	16QAM	132647	12RB#6	21.52	22.00
Band66	5MHz	16QAM	132647	12RB#13	21.45	22.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band66	5MHz	16QAM	132647	25RB#0	21.43	22.00
Band66	10MHz	QPSK	132022	1RB#0	23.51	24.00
Band66	10MHz	QPSK	132022	1RB#24	23.42	24.00
Band66	10MHz	QPSK	132022	1RB#49	23.40	24.00
Band66	10MHz	QPSK	132022	25RB#0	22.28	23.00
Band66	10MHz	QPSK	132022	25RB#12	22.28	23.00
Band66	10MHz	QPSK	132022	25RB#25	22.23	23.00
Band66	10MHz	QPSK	132022	50RB#0	22.32	23.00
Band66	10MHz	16QAM	132022	1RB#0	22.48	23.00
Band66	10MHz	16QAM	132022	1RB#24	22.40	23.00
Band66	10MHz	16QAM	132022	1RB#49	22.35	23.00
Band66	10MHz	16QAM	132022	25RB#0	21.28	22.00
Band66	10MHz	16QAM	132022	25RB#12	21.29	22.00
Band66	10MHz	16QAM	132022	25RB#25	21.25	22.00
Band66	10MHz	16QAM	132022	50RB#0	21.28	22.00
Band66	10MHz	QPSK	132322	1RB#0	23.52	24.00
Band66	10MHz	QPSK	132322	1RB#24	23.41	24.00
Band66	10MHz	QPSK	132322	1RB#49	23.20	24.00
Band66	10MHz	QPSK	132322	25RB#0	22.33	23.00
Band66	10MHz	QPSK	132322	25RB#12	22.37	23.00
Band66	10MHz	QPSK	132322	25RB#25	22.27	23.00
Band66	10MHz	QPSK	132322	50RB#0	22.35	23.00
Band66	10MHz	16QAM	132322	1RB#0	22.52	23.00
Band66	10MHz	16QAM	132322	1RB#24	22.38	23.00
Band66	10MHz	16QAM	132322	1RB#49	22.16	23.00
Band66	10MHz	16QAM	132322	25RB#0	21.34	22.00
Band66	10MHz	16QAM	132322	25RB#12	21.34	22.00
Band66	10MHz	16QAM	132322	25RB#25	21.29	22.00
Band66	10MHz	16QAM	132322	50RB#0	21.29	22.00
Band66	10MHz	QPSK	132622	1RB#0	23.36	24.00
Band66	10MHz	QPSK	132622	1RB#24	23.51	24.00
Band66	10MHz	QPSK	132622	1RB#49	23.54	24.00
Band66	10MHz	QPSK	132622	25RB#0	22.43	23.00
Band66	10MHz	QPSK	132622	25RB#12	22.45	23.00
Band66	10MHz	QPSK	132622	25RB#25	22.42	23.00
Band66	10MHz	QPSK	132622	50RB#0	22.48	23.00
Band66	10MHz	16QAM	132622	1RB#0	22.32	23.00
Band66	10MHz	16QAM	132622	1RB#24	22.50	23.00
Band66	10MHz	16QAM	132622	1RB#49	22.52	23.00
Band66	10MHz	16QAM	132622	25RB#0	21.41	22.00
Band66	10MHz	16QAM	132622	25RB#12	21.41	22.00
Band66	10MHz	16QAM	132622	25RB#25	21.43	22.00
Band66	10MHz	16QAM	132622	50RB#0	21.47	22.00
Band66	15MHz	QPSK	132047	1RB#0	23.24	24.00
Band66	15MHz	QPSK	132047	1RB#38	23.25	24.00
Band66	15MHz	QPSK	132047	1RB#74	23.12	24.00
Band66	15MHz	QPSK	132047	38RB#0	22.40	23.00
Band66	15MHz	QPSK	132047	38RB#18	22.42	23.00
Band66	15MHz	QPSK	132047	38RB#37	22.27	23.00
Band66	15MHz	QPSK	132047	75RB#0	22.28	23.00
Band66	15MHz	16QAM	132047	1RB#0	22.40	23.00
Band66	15MHz	16QAM	132047	1RB#38	22.43	23.00
Band66	15MHz	16QAM	132047	1RB#74	22.27	23.00
Band66	15MHz	16QAM	132047	38RB#0	22.39	23.00
Band66	15MHz	16QAM	132047	38RB#18	22.45	23.00
Band66	15MHz	16QAM	132047	38RB#37	22.26	23.00
Band66	15MHz	16QAM	132047	75RB#0	21.27	22.00
Band66	15MHz	QPSK	132322	1RB#0	23.55	24.00
Band66	15MHz	QPSK	132322	1RB#38	23.41	24.00
Band66	15MHz	QPSK	132322	1RB#74	23.08	24.00
Band66	15MHz	QPSK	132322	38RB#0	22.53	23.00
Band66	15MHz	QPSK	132322	38RB#18	22.40	23.00
Band66	15MHz	QPSK	132322	38RB#37	22.07	23.00
Band66	15MHz	QPSK	132322	75RB#0	22.28	23.00
Band66	15MHz	16QAM	132322	1RB#0	22.51	23.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band66	15MHz	16QAM	132322	1RB#38	22.39	23.00
Band66	15MHz	16QAM	132322	1RB#74	22.05	23.00
Band66	15MHz	16QAM	132322	38RB#0	22.51	23.00
Band66	15MHz	16QAM	132322	38RB#18	22.36	23.00
Band66	15MHz	16QAM	132322	38RB#37	22.07	23.00
Band66	15MHz	16QAM	132322	75RB#0	21.21	22.00
Band66	15MHz	QPSK	132597	1RB#0	23.12	24.00
Band66	15MHz	QPSK	132597	1RB#38	23.45	24.00
Band66	15MHz	QPSK	132597	1RB#74	23.49	24.00
Band66	15MHz	QPSK	132597	38RB#0	22.08	23.00
Band66	15MHz	QPSK	132597	38RB#18	22.43	23.00
Band66	15MHz	QPSK	132597	38RB#37	22.45	23.00
Band66	15MHz	QPSK	132597	75RB#0	22.30	23.00
Band66	15MHz	16QAM	132597	1RB#0	22.07	23.00
Band66	15MHz	16QAM	132597	1RB#38	22.43	23.00
Band66	15MHz	16QAM	132597	1RB#74	22.47	23.00
Band66	15MHz	16QAM	132597	38RB#0	22.07	23.00
Band66	15MHz	16QAM	132597	38RB#18	22.42	23.00
Band66	15MHz	16QAM	132597	38RB#37	22.47	23.00
Band66	15MHz	16QAM	132597	75RB#0	21.26	22.00
Band66	20MHz	QPSK	132072	1RB#0	23.26	24.00
Band66	20MHz	QPSK	132072	1RB#49	23.34	24.00
Band66	20MHz	QPSK	132072	1RB#99	23.33	24.00
Band66	20MHz	QPSK	132072	50RB#0	22.28	23.00
Band66	20MHz	QPSK	132072	50RB#25	22.29	23.00
Band66	20MHz	QPSK	132072	50RB#50	22.32	23.00
Band66	20MHz	QPSK	132072	100RB#0	22.28	23.00
Band66	20MHz	16QAM	132072	1RB#0	22.56	23.00
Band66	20MHz	16QAM	132072	1RB#49	22.59	23.00
Band66	20MHz	16QAM	132072	1RB#99	22.53	23.00
Band66	20MHz	16QAM	132072	50RB#0	21.31	22.00
Band66	20MHz	16QAM	132072	50RB#25	21.29	22.00
Band66	20MHz	16QAM	132072	50RB#50	21.28	22.00
Band66	20MHz	16QAM	132072	100RB#0	21.24	22.00
Band66	20MHz	QPSK	132322	1RB#0	23.56	24.00
Band66	20MHz	QPSK	132322	1RB#49	23.43	24.00
Band66	20MHz	QPSK	132322	1RB#99	23.02	24.00
Band66	20MHz	QPSK	132322	50RB#0	22.40	23.00
Band66	20MHz	QPSK	132322	50RB#25	22.40	23.00
Band66	20MHz	QPSK	132322	50RB#50	22.24	23.00
Band66	20MHz	QPSK	132322	100RB#0	22.29	23.00
Band66	20MHz	16QAM	132322	1RB#0	22.34	23.00
Band66	20MHz	16QAM	132322	1RB#49	22.24	23.00
Band66	20MHz	16QAM	132322	1RB#99	21.82	22.00
Band66	20MHz	16QAM	132322	50RB#0	21.39	22.00
Band66	20MHz	16QAM	132322	50RB#25	21.38	22.00
Band66	20MHz	16QAM	132322	50RB#50	21.21	22.00
Band66	20MHz	16QAM	132322	100RB#0	21.23	22.00
Band66	20MHz	QPSK	132572	1RB#0	22.95	23.00
Band66	20MHz	QPSK	132572	1RB#49	23.36	24.00
Band66	20MHz	QPSK	132572	1RB#99	23.47	24.00
Band66	20MHz	QPSK	132572	50RB#0	22.20	23.00
Band66	20MHz	QPSK	132572	50RB#25	22.18	23.00
Band66	20MHz	QPSK	132572	50RB#50	22.24	23.00
Band66	20MHz	QPSK	132572	100RB#0	22.20	23.00
Band66	20MHz	16QAM	132572	1RB#0	21.72	22.00
Band66	20MHz	16QAM	132572	1RB#49	22.16	23.00
Band66	20MHz	16QAM	132572	1RB#99	22.23	23.00
Band66	20MHz	16QAM	132572	50RB#0	21.15	22.00
Band66	20MHz	16QAM	132572	50RB#25	21.12	22.00
Band66	20MHz	16QAM	132572	50RB#50	21.20	22.00
Band66	20MHz	16QAM	132572	100RB#0	21.16	22.00





7.1.16. Conducted Power Measurement Results(WIFI 2.4G)

Test Mode	Antenna	Frequency[MHz]	Set Power	Average power [dBm]	Duty Cycle [%]	DC Factor [dBm]	Result [dBm]	Tune Up (dBm)
11B	Ant1	2412	---	15.22	100.00	0.00	15.22	16.00
	Ant2	2412	---	10.26	99.76	0.01	10.27	12.00
	Ant1	2437	---	11.04	99.64	0.02	11.06	12.00
	Ant2	2437	---	11.45	99.76	0.01	11.46	12.00
	Ant1	2462	---	11.16	85.18	0.70	11.86	12.00
	Ant2	2462	---	11.44	99.64	0.02	11.46	12.00
11G	Ant1	2412	---	9.97	97.20	0.12	10.09	11.00
	Ant2	2412	---	10.90	97.20	0.12	11.02	12.00
	Ant1	2437	---	9.73	97.20	0.12	9.85	10.00
	Ant2	2437	---	11.16	97.20	0.12	11.28	12.00
	Ant1	2462	---	10.07	97.20	0.12	10.19	11.00
	Ant2	2462	---	10.85	97.20	0.12	10.97	11.00
11N20MIMO	Ant1	2412	---	10.66	97.01	0.13	10.79	11.00
	Ant2	2412	---	10.87	97.01	0.13	11.00	12.00
	total	2412	---	---	---	---	13.91	---
	Ant1	2437	---	11.02	97.01	0.13	11.15	12.00
	Ant2	2437	---	11.00	97.01	0.13	11.13	12.00
	total	2437	---	---	---	---	14.15	---
	Ant1	2462	---	10.94	97.01	0.13	11.07	12.00
	Ant2	2462	---	11.05	97.76	0.10	11.15	12.00
	total	2462	---	---	---	---	14.12	---
11N40MIMO	Ant1	2422	---	10.93	95.59	0.20	11.13	12.00
	Ant2	2422	---	11.18	94.20	0.26	11.44	12.00
	total	2422	---	---	---	---	14.30	---
	Ant1	2437	---	10.85	94.20	0.26	11.11	12.00
	Ant2	2437	---	11.23	95.59	0.20	11.43	12.00
	total	2437	---	---	---	---	14.28	---
	Ant1	2452	---	11.08	95.59	0.20	11.28	12.00
	Ant2	2452	---	11.29	94.12	0.26	11.55	12.00
	total	2452	---	---	---	---	14.43	---

Note:

a) Power must be measured at each transmit antenna port according to the DSSS and OFDM transmission configurations in each standalone and aggregated frequency band.

b) Power measurement is required for the transmission mode configuration with the highest maximum output power specified for production units.

1) When the same highest maximum output power specification applies to multiple transmission modes, the largest channel bandwidth configuration with the lowest order modulation and lowest data rate is measured.

2) When the same highest maximum output power is specified for multiple largest channel bandwidth configurations with the same lowest order modulation or lowest order modulation and lowest data rate, power measurement is required for all equivalent 802.11 configurations with the same maximum output power.

c) For each transmission mode configuration, power must be measured for the highest and lowest channels; and at the mid-band channel(s) when there are at least 3 channels. For configurations with multiple mid-band channels, due to an even number of channels, both channels should be measured.



**7.1.17. Conducted Power Measurement Results(WIFI 5.2G)**

Test Mode	Antenna	Freq(MHz)	Channel Power [dBm]	Duty Cycle [%]	DC Factor [dBm]	Result [dBm]	Tune Up (dBm)
11A	Ant1	5180	9.30	97.20	0.12	9.42	10.00
	Ant2	5180	8.21	97.20	0.12	8.33	9.00
	Ant1	5200	9.50	97.90	0.09	9.59	10.00
	Ant2	5200	8.81	97.90	0.09	8.90	9.00
	Ant1	5240	9.96	97.89	0.09	10.05	11.00
	Ant2	5240	8.29	97.90	0.09	8.38	9.00
11N20MIMO	Ant1	5180	11.76	97.74	0.10	11.86	12.00
	Ant2	5180	5.35	97.76	0.10	5.45	6.00
	total	5180	---	---	---	12.75	---
	Ant1	5200	11.83	97.01	0.13	11.96	12.00
	Ant2	5200	8.72	97.76	0.10	8.82	9.00
	total	5200	---	---	---	13.68	---
	Ant1	5240	11.59	97.74	0.10	11.69	12.00
	Ant2	5240	8.41	97.01	0.13	8.54	9.00
	total	5240	---	---	---	13.40	14.00
	total	5180	---	---	---	12.75	---
11N40MIMO	Ant1	5190	12.04	95.59	0.20	12.24	13.00
	Ant2	5190	8.67	95.59	0.20	8.87	9.00
	total	5190	---	---	---	13.88	---
	Ant1	5230	11.79	94.20	0.26	12.05	13.00
	Ant2	5230	4.44	94.12	0.26	4.70	5.00
	total	5230	---	---	---	12.78	---
11AC20MIMO	Ant1	5180	9.48	96.30	0.16	9.64	10.00
	Ant2	5180	9.83	77.78	1.09	10.92	12.00
	total	5180	---	---	---	13.34	---
	Ant1	5200	8.43	96.30	0.16	8.59	9.00
	Ant2	5200	9.98	78.95	1.03	11.01	12.00
	total	5200	---	---	---	12.98	---
	Ant1	5240	8.37	97.04	0.13	8.50	9.00
	Ant2	5240	9.71	78.95	1.03	10.74	12.00
	total	5240	---	---	---	12.77	---
	total	5180	---	---	---	13.34	---
11AC40MIMO	Ant1	5190	11.02	94.20	0.26	11.28	11.50
	Ant2	5190	9.41	69.23	1.60	11.01	11.50
	total	5190	---	---	---	14.16	---
	Ant1	5230	7.10	94.20	0.26	7.36	7.50
	Ant2	5230	9.86	69.23	1.60	11.46	11.50
	total	5230	---	---	---	12.89	---
11AC80MIMO	Ant1	5210	6.81	88.89	0.51	7.32	7.50
	Ant2	5210	8.72	59.49	2.26	10.98	11.00
	total	5210	---	---	---	12.53	---

Note:

a) Power must be measured at each transmit antenna port according to the DSSS and OFDM transmission configurations in each standalone and aggregated frequency band.

b) Power measurement is required for the transmission mode configuration with the highest maximum output power specified for production units.

1) When the same highest maximum output power specification applies to multiple transmission modes, the largest channel bandwidth configuration with the lowest order modulation and lowest data rate is measured.

2) When the same highest maximum output power is specified for multiple largest channel bandwidth configurations with the same lowest order modulation or lowest order modulation and lowest data rate, power measurement is required for all equivalent 802.11 configurations with the same maximum output power.

c) For each transmission mode configuration, power must be measured for the highest and lowest channels; and at the mid-band channel(s) when there are at least 3 channels. For configurations with multiple mid-band channels, due to an even number of channels, both channels should be measured.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**7.1.18. Conducted Power Measurement Results(WIFI 5.8G)**

Test Mode	Antenna	Freq(MHz)	Channel Power [dBm]	Duty Cycle [%]	DC Factor [dBm]	Result [dBm]	Tune Up (dBm)
11A	Ant1	5745	6.83	97.89	0.09	6.92	7.00
	Ant2	5745	4.47	97.89	0.09	4.56	5.00
	Ant1	5785	8.01	97.20	0.12	8.13	9.00
	Ant2	5785	4.91	97.90	0.09	5.00	6.00
	Ant1	5825	8.52	97.89	0.09	8.61	9.00
	Ant2	5825	5.34	97.90	0.09	5.43	6.00
11N20MIMO	Ant1	5745	8.25	97.74	0.10	8.35	9.00
	Ant2	5745	4.62	97.01	0.13	4.75	5.00
	total	5745	---	---	---	9.92	---
	Ant1	5785	8.20	96.27	0.17	8.37	9.00
	Ant2	5785	2.96	97.01	0.13	3.09	4.00
	total	5785	---	---	---	9.50	---
	Ant1	5825	8.61	97.74	0.10	8.71	9.00
	Ant2	5825	5.35	97.01	0.13	5.48	6.00
	total	5825	---	---	---	10.40	---
11N40MIMO	Ant1	5755	6.57	95.59	0.20	6.77	7.00
	Ant2	5755	0.38	95.59	0.20	0.58	1.00
	total	5755	---	---	---	7.71	---
	Ant1	5795	7.99	94.20	0.26	8.25	9.00
	Ant2	5795	0.72	95.59	0.20	0.92	1.00
	total	5795	---	---	---	8.99	---
11AC20MIMO	Ant1	5745	6.78	96.30	0.16	6.94	7.00
	Ant2	5745	6.96	78.95	1.03	7.99	9.00
	total	5745	---	---	---	10.51	---
	Ant1	5785	6.97	97.04	0.13	7.10	8.00
	Ant2	5785	7.32	78.95	1.03	8.35	9.00
	total	5785	---	---	---	10.78	---
	Ant1	5825	7.55	97.04	0.13	7.68	8.00
	Ant2	5825	7.36	78.95	1.03	8.39	9.00
	total	5825	---	---	---	11.06	---
11AC40MIMO	Ant1	5755	3.51	94.20	0.26	3.77	4.00
	Ant2	5755	6.15	75.00	1.25	7.40	7.50
	total	5755	---	---	---	8.96	---
	Ant1	5795	4.33	94.20	0.26	4.59	5.00
	Ant2	5795	6.66	69.23	1.60	8.26	8.50
	total	5795	---	---	---	9.81	---
11AC80MIMO	Ant1	5775	1.99	91.67	0.38	2.37	2.50
	Ant2	5775	5.81	63.64	1.96	7.77	8.00
	total	5775	---	---	---	8.87	---

Note:

a) Power must be measured at each transmit antenna port according to the DSSS and OFDM transmission configurations in each standalone and aggregated frequency band.

b) Power measurement is required for the transmission mode configuration with the highest maximum output power specified for production units.

1) When the same highest maximum output power specification applies to multiple transmission modes, the largest channel bandwidth configuration with the lowest order modulation and lowest data rate is measured.

2) When the same highest maximum output power is specified for multiple largest channel bandwidth configurations with the same lowest order modulation or lowest order modulation and lowest data rate, power measurement is required for all equivalent 802.11 configurations with the same maximum output power.

c) For each transmission mode configuration, power must be measured for the highest and lowest channels; and at the mid-band channel(s) when there are at least 3 channels. For configurations with multiple mid-band channels, due to an even number of channels, both channels should be measured.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**7.1.19. Conducted Power Measurement Results(Bluetooth)**

Test Mode	Antenna	Freq(MHz)	Conducted Power[dBm]	Tune Up (dBm)
DH5	Ant1	2402	9.79	10.00
		2441	7.88	8.00
		2480	11.09	12.00
2DH5	Ant1	2402	8.45	9.00
		2441	6.55	7.00
		2480	10.20	11.00
3DH5	Ant1	2402	8.56	9.00
		2441	6.60	7.00
		2480	9.98	10.00

TestMode	Antenna	Freq(MHz)	Conducted Power[dBm]	Tune Up (dBm)
BLE_1M	Ant1	2402	-2.75	-2.00
		2440	-3.24	-3.00
		2480	-4.12	-4.00
BLE_2M	Ant1	2402	-3.56	-3.00
		2440	-2.55	-2.00
		2480	-4.31	-4.00





7.2. Stand-alone SAR test evaluation

Unless specifically required by the published RF exposure KDB procedures, standalone 1-g head or body and Product specific 10g SAR evaluation for general population exposure conditions, by measurement or numerical simulation, is not required when the corresponding SAR Test Exclusion Threshold condition is satisfied. These test exclusion conditions are based on source-based time-averaged maximum conducted output power of the RF channel requiring evaluation, adjusted for tune-up tolerance, and the minimum test separation distance required for the exposure conditions.

Freq. Band	Frequency (GHz)	Position	Average Power		Test Separation (mm)	Calculate Value	Exclusion Threshold	Exclusion (Y/N)
			dBm	mW				
Bluetooth	2.48	Head	12.00	15.85	5	4.992	3	N
		Body-worn	12.00	15.85	10	2.496	3	Y
		hotspot	12.00	15.85	10	2.496	3	Y

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.





7.3. SAR Measurement Results

The calculated SAR is obtained by the following formula:

$$\text{Reported SAR} = \text{Measured SAR} * 10^{(P_{\text{target}} - P_{\text{measured}})/10}$$

$$\text{Scaling factor} = 10^{(P_{\text{target}} - P_{\text{measured}})/10}$$

$$\text{Reported SAR} = \text{Measured SAR} * \text{Scaling factor}$$

Where

P_{target} is the power of manufacturing upper limit;

P_{measured} is the measured power;

Measured SAR is measured SAR at measured power which including power drift)

Reported SAR which including Power Drift and Scaling factor

7.3.1. SAR Results[GSM 850]

SAR Values [GSM850]								
Ch/ Freq. (MHz)	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
							Measured	Reported
measured / reported SAR numbers – Head Test data								
190/836.6	GSM	Left Cheek	33.13	33.50	0.07	1.089	0.166	0.181
190/836.6	GSM	Left Tilt	33.13	33.50	0.06	1.089	0.089	0.097
190/836.6	GSM	Right Cheek	33.13	33.50	-0.10	1.089	0.154	0.168
190/836.6	GSM	Right Tilt	33.13	33.50	-0.13	1.089	0.081	0.088
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)								
190/836.6	GPRS 3TS	Front side	30.56	31.00	-0.09	1.107	0.245	0.271
190/836.6	GPRS 3TS	Rear side	30.56	31.00	-0.17	1.107	0.289	0.320
190/836.6	GPRS 3TS	Left side	30.56	31.00	-0.15	1.107	0.165	0.183
190/836.6	GPRS 3TS	Right side	30.56	31.00	0.06	1.107	0.158	0.175
190/836.6	GPRS 3TS	Bottom side	30.56	31.00	-0.17	1.107	0.235	0.260

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.
- 3) Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode



**7.3.2. SAR Results[GSM 1900]**

SAR Values [GSM1900]								
Ch/ Freq. (MHz)	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
							Measured	Reported
measured / reported SAR numbers – Head Test data								
661/1880	GSM	Left Cheek	28.76	29.00	0.20	1.057	0.196	0.207
661/1880	GSM	Left Tilt	28.76	29.00	-0.18	1.057	0.102	0.108
661/1880	GSM	Right Cheek	28.76	29.00	0.10	1.057	0.182	0.192
661/1880	GSM	Right Tilt	28.76	29.00	0.03	1.057	0.093	0.098
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)								
661/1880	GPRS 2TS	Front side	27.90	28.00	-0.19	1.023	0.102	0.104
661/1880	GPRS 2TS	Rear side	27.90	28.00	0.05	1.023	0.188	0.192
661/1880	GPRS 2TS	Left side	27.90	28.00	-0.11	1.023	0.052	0.053
661/1880	GPRS 2TS	Right side	27.90	28.00	-0.17	1.023	0.046	0.047
661/1880	GPRS 2TS	Bottom side	27.90	28.00	0.05	1.023	0.082	0.084

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.
- 3) Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode





7.3.3. SAR Results [WCDMA Band II]

SAR Values [WCDMA Band II]								
Ch/ Freq. (MHz)	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
							Measured	Reported
measured / reported SAR numbers – Head Test data								
9538/1907.6	RMC	Left Cheek	22.24	22.50	-0.17	1.062	0.168	0.178
9538/1907.6	RMC	Left Tilt	22.24	22.50	0.12	1.062	0.092	0.098
9538/1907.6	RMC	Right Cheek	22.24	22.50	0.03	1.062	0.158	0.168
9538/1907.6	RMC	Right Tilt	22.24	22.50	-0.19	1.062	0.086	0.091
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)								
9538/1907.6	RMC	Front side	22.24	22.50	-0.08	1.062	0.110	0.117
9538/1907.6	RMC	Rear side	22.24	22.50	-0.16	1.062	0.152	0.161
9538/1907.6	RMC	Left side	22.24	22.50	-0.14	1.062	0.050	0.053
9538/1907.6	RMC	Right side	22.24	22.50	0.02	1.062	0.046	0.049
9538/1907.6	RMC	Bottom side	22.24	22.50	-0.19	1.062	0.096	0.102

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.
- 3) RMC* - RMC 12.2kbps mode;
- 4) Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode





7.3.4. SAR Results [WCDMA Band IV]

SAR Values [WCDMA Band IV]								
Ch/ Freq. (MHz)	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
							Measured	Reported
measured / reported SAR numbers – Head Test data								
1413/1732.6	RMC	Left Cheek	21.20	22.50	-0.04	1.349	0.128	0.173
1413/1732.6	RMC	Left Tilt	21.20	22.50	0.17	1.349	0.070	0.094
1413/1732.6	RMC	Right Cheek	21.20	22.50	0.00	1.349	0.148	0.200
1413/1732.6	RMC	Right Tilt	21.20	22.50	0.06	1.349	0.075	0.101
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)								
1413/1732.6	RMC	Front side	21.20	22.50	-0.02	1.349	0.095	0.128
1413/1732.6	RMC	Rear side	21.20	22.50	-0.13	1.349	0.136	0.183
1413/1732.6	RMC	Left side	21.20	22.50	0.19	1.349	0.052	0.070
1413/1732.6	RMC	Right side	21.20	22.50	0.11	1.349	0.047	0.063
1413/1732.6	RMC	Bottom side	21.20	22.50	-0.10	1.349	0.090	0.121

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.
- 3) RMC* - RMC 12.2kbps mode;
- 4) Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode





7.3.5. SAR Results [WCDMA Band V]

SAR Values [WCDMA Band V]								
Ch/ Freq. (MHz)	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
							Measured	Reported
measured / reported SAR numbers – Head Test data								
4132/826.4	RMC	Left Cheek	23.57	24.00	0.03	1.104	0.172	0.190
4132/826.4	RMC	Left Tilt	23.57	24.00	-0.19	1.104	0.103	0.114
4132/826.4	RMC	Right Cheek	23.57	24.00	0.14	1.104	0.199	0.220
4132/826.4	RMC	Right Tilt	23.57	24.00	0.20	1.104	0.115	0.127
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)								
4132/826.4	RMC	Front side	23.57	24.00	-0.12	1.104	0.261	0.288
4132/826.4	RMC	Rear side	23.57	24.00	-0.14	1.104	0.302	0.333
4132/826.4	RMC	Left side	23.57	24.00	-0.03	1.104	0.178	0.197
4132/826.4	RMC	Right side	23.57	24.00	-0.15	1.104	0.169	0.187
4132/826.4	RMC	Bottom side	23.57	24.00	0.04	1.104	0.255	0.282

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.
- 3) RMC* - RMC 12.2kbps mode;
- 4) Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode





7.3.6. SAR Results [LTE Band 7]

SAR Values [LTE Band 7]									
Ch/ Freq. (MHz)	BW.	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
								Measured	Reported
measured / reported SAR numbers – Head <1RB>									
21100/2535.5	20M	QPSK 1RB_0	Left Cheek	22.45	23.00	0.15	1.135	0.529	0.600
21100/2535.5	20M	QPSK 1RB_0	Left Tilt	22.45	23.00	0.02	1.135	0.396	0.449
21100/2535.5	20M	QPSK 1RB_0	Right Cheek	22.45	23.00	-0.12	1.135	0.511	0.580
21100/2535.5	20M	QPSK 1RB_0	Right Tilt	22.45	23.00	0.08	1.135	0.387	0.439
measured / reported SAR numbers – Head <50%RB>									
21100/2535.5	20M	QPSK 50RB_0	Left Cheek	21.37	22.00	-0.14	1.156	0.425	0.491
21100/2535.5	20M	QPSK 50RB_0	Left Tilt	21.37	22.00	0.05	1.156	0.287	0.332
21100/2535.5	20M	QPSK 50RB_0	Right Cheek	21.37	22.00	-0.19	1.156	0.413	0.477
21100/2535.5	20M	QPSK 50RB_0	Right Tilt	21.37	22.00	0.05	1.156	0.266	0.308
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)<1RB>									
21100/2535.5	20M	QPSK 1RB_0	Front side	22.45	23.00	-0.11	1.135	0.587	0.666
21100/2535.5	20M	QPSK 1RB_0	Rear side	22.45	23.00	0.16	1.135	0.669	0.759
21100/2535.5	20M	QPSK 1RB_0	Left side	22.45	23.00	-0.17	1.135	0.477	0.541
21100/2535.5	20M	QPSK 1RB_0	Right side	22.45	23.00	0.02	1.135	0.469	0.532
21100/2535.5	20M	QPSK 1RB_0	Bottom side	22.45	23.00	-0.15	1.135	0.576	0.654
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)<50%RB>									
21100/2535.5	20M	QPSK 50RB_0	Front side	21.37	22.00	0.05	1.156	0.401	0.464
21100/2535.5	20M	QPSK 50RB_0	Rear side	21.37	22.00	-0.17	1.156	0.445	0.514
21100/2535.5	20M	QPSK 50RB_0	Left side	21.37	22.00	0.16	1.156	0.287	0.332
21100/2535.5	20M	QPSK 50RB_0	Right side	21.37	22.00	-0.15	1.156	0.276	0.319
21100/2535.5	20M	QPSK 50RB_0	Bottom side	21.37	22.00	0.08	1.156	0.389	0.450

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{W/kg}$ or 1.5W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{W/kg}$ or 1.0W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{MHz}$.
- 3) Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode





7.3.7. SAR Results [LTE Band 19]

SAR Values [LTE Band 19]									
Ch/ Freq. (MHz)	BW.	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
								Measured	Reported
measured / reported SAR numbers – Head<1RB>									
24075/837.5	15M	QPSK 1RB_0	Left Cheek	24.06	25.00	0.08	1.242	0.199	0.247
24075/837.5	15M	QPSK 1RB_0	Left Tilt	24.06	25.00	-0.13	1.242	0.102	0.109
24075/837.5	15M	QPSK 1RB_0	Right Cheek	24.06	25.00	0.01	1.242	0.187	0.247
24075/837.5	15M	QPSK 1RB_0	Right Tilt	24.06	25.00	-0.05	1.242	0.088	0.127
measured / reported SAR numbers – Head<50%RB>									
24075/837.5	15M	QPSK 38RB_0	Left Cheek	23.05	24.00	0.02	1.245	0.139	0.173
24075/837.5	15M	QPSK 38RB_0	Left Tilt	23.05	24.00	-0.01	1.245	0.071	0.088
24075/837.5	15M	QPSK 38RB_0	Right Cheek	23.05	24.00	-0.15	1.245	0.123	0.153
24075/837.5	15M	QPSK 38RB_0	Right Tilt	23.05	24.00	-0.12	1.245	0.066	0.082
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)<1RB>									
24075/837.5	15M	QPSK 1RB_0	Front side	24.06	25.00	-0.13	1.242	0.287	0.356
24075/837.5	15M	QPSK 1RB_0	Rear side	24.06	25.00	-0.13	1.242	0.333	0.413
24075/837.5	15M	QPSK 1RB_0	Left side	24.06	25.00	-0.15	1.242	0.145	0.180
24075/837.5	15M	QPSK 1RB_0	Right side	24.06	25.00	-0.16	1.242	0.138	0.171
24075/837.5	15M	QPSK 1RB_0	Bottom side	24.06	25.00	0.12	1.242	0.269	0.334
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)<50%RB>									
24075/837.5	15M	QPSK 38RB_0	Front side	23.05	24.00	0.07	1.245	0.165	0.205
24075/837.5	15M	QPSK 38RB_0	Rear side	23.05	24.00	-0.05	1.245	0.265	0.330
24075/837.5	15M	QPSK 38RB_0	Left side	23.05	24.00	-0.13	1.245	0.087	0.108
24075/837.5	15M	QPSK 38RB_0	Right side	23.05	24.00	-0.15	1.245	0.080	0.100
24075/837.5	15M	QPSK 38RB_0	Bottom side	23.05	24.00	0.11	1.245	0.152	0.189

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.
- 3) Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode





7.3.8. SAR Results [LTE Band 25]

SAR Values [LTE Band 25]									
Ch/ Freq. (MHz)	BW.	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
								Measured	Reported
measured / reported SAR numbers – Head <1RB>									
26590/1905	20M	QPSK 1RB_49	Left Cheek	23.64	24.00	0.06	1.086	0.188	0.204
26590/1905	20M	QPSK 1RB_49	Left Tilt	23.64	24.00	-0.14	1.086	0.122	0.133
26590/1905	20M	QPSK 1RB_49	Right Cheek	23.64	24.00	-0.13	1.086	0.206	0.224
26590/1905	20M	QPSK 1RB_49	Right Tilt	23.64	24.00	0.12	1.086	0.136	0.148
measured / reported SAR numbers – Head <50%RB>									
26590/1905	20M	QPSK 50RB_0	Left Cheek	22.60	23.00	-0.14	1.096	0.144	0.158
26590/1905	20M	QPSK 50RB_0	Left Tilt	22.60	23.00	0.02	1.096	0.058	0.064
26590/1905	20M	QPSK 50RB_0	Right Cheek	22.60	23.00	-0.13	1.096	0.158	0.173
26590/1905	20M	QPSK 50RB_0	Right Tilt	22.60	23.00	0.08	1.096	0.069	0.076
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)<1RB>									
26590/1905	20M	QPSK 1RB_49	Front side	23.64	24.00	-0.11	1.086	0.178	0.193
26590/1905	20M	QPSK 1RB_49	Rear side	23.64	24.00	-0.17	1.086	0.219	0.238
26590/1905	20M	QPSK 1RB_49	Left side	23.64	24.00	0.02	1.086	0.112	0.122
26590/1905	20M	QPSK 1RB_49	Right side	23.64	24.00	0.00	1.086	0.106	0.115
26590/1905	20M	QPSK 1RB_49	Bottom side	23.64	24.00	0.16	1.086	0.170	0.185
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)<50%RB>									
26590/1905	20M	QPSK 50RB_0	Front side	22.60	23.00	0.16	1.096	0.116	0.127
26590/1905	20M	QPSK 50RB_0	Rear side	22.60	23.00	-0.14	1.096	0.154	0.169
26590/1905	20M	QPSK 50RB_0	Left side	22.60	23.00	0.05	1.096	0.074	0.081
26590/1905	20M	QPSK 50RB_0	Right side	22.60	23.00	-0.18	1.096	0.068	0.075
26590/1905	20M	QPSK 50RB_0	Bottom side	22.60	23.00	0.09	1.096	0.109	0.120

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.
- 3) Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode



**7.3.9. SAR Results [LTE Band 26] (814-824)**

SAR Values [LTE Band 26]									
Ch/ Freq. (MHz)	BW.	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
								Measured	Reported
measured / reported SAR numbers – Head<1RB>									
26740/819	10M	QPSK 1RB_49	Left Cheek	24.00	25.00	0.01	1.259	0.165	0.208
26740/819	10M	QPSK 1RB_49	Left Tilt	24.00	25.00	-0.17	1.259	0.079	0.099
26740/819	10M	QPSK 1RB_49	Right Cheek	24.00	25.00	0.15	1.259	0.146	0.184
26740/819	10M	QPSK 1RB_49	Right Tilt	24.00	25.00	-0.18	1.259	0.058	0.073
measured / reported SAR numbers – Head<50%RB>									
26740/819	10M	QPSK 25RB_25	Left Cheek	22.91	23.00	0.01	1.021	0.125	0.128
26740/819	10M	QPSK 25RB_25	Left Tilt	22.91	23.00	-0.15	1.021	0.052	0.053
26740/819	10M	QPSK 25RB_25	Right Cheek	22.91	23.00	0.16	1.021	0.114	0.116
26740/819	10M	QPSK 25RB_25	Right Tilt	22.91	23.00	-0.18	1.021	0.044	0.045
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)<1RB>									
26740/819	10M	QPSK 1RB_49	Front side	24.00	25.00	0.02	1.259	0.239	0.301
26740/819	10M	QPSK 1RB_49	Rear side	24.00	25.00	-0.11	1.259	0.288	0.363
26740/819	10M	QPSK 1RB_49	Left side	24.00	25.00	-0.16	1.259	0.152	0.191
26740/819	10M	QPSK 1RB_49	Right side	24.00	25.00	0.09	1.259	0.143	0.180
26740/819	10M	QPSK 1RB_49	Bottom side	24.00	25.00	-0.15	1.259	0.218	0.274
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)<50%RB>									
26740/819	10M	QPSK 25RB_25	Front side	22.91	23.00	-0.17	1.021	0.154	0.157
26740/819	10M	QPSK 25RB_25	Rear side	22.91	23.00	0.04	1.021	0.216	0.221
26740/819	10M	QPSK 25RB_25	Left side	22.91	23.00	-0.11	1.021	0.087	0.089
26740/819	10M	QPSK 25RB_25	Right side	22.91	23.00	0.09	1.021	0.080	0.082
26740/819	10M	QPSK 25RB_25	Bottom side	22.91	23.00	0.02	1.021	0.144	0.147

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{W/kg}$ or 1.5W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{W/kg}$ or 1.0W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{MHz}$.
- 3) Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode





7.3.10. SAR Results [LTE Band 26]

SAR Values [LTE Band 26]									
Ch/ Freq. (MHz)	BW.	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
								Measured	Reported
measured / reported SAR numbers – Head<1RB>									
26865/831.5	15M	QPSK 1RB_38	Left Cheek	24.19	25.00	0.01	1.205	0.144	0.174
26865/831.5	15M	QPSK 1RB_38	Left Tilt	24.19	25.00	-0.16	1.205	0.065	0.078
26865/831.5	15M	QPSK 1RB_38	Right Cheek	24.19	25.00	0.19	1.205	0.132	0.159
26865/831.5	15M	QPSK 1RB_38	Right Tilt	24.19	25.00	0.20	1.205	0.057	0.069
measured / reported SAR numbers – Head<50%RB>									
26865/831.5	15M	QPSK 38RB_18	Left Cheek	23.17	24.00	0.02	1.211	0.074	0.090
26865/831.5	15M	QPSK 38RB_18	Left Tilt	23.17	24.00	-0.17	1.211	0.036	0.044
26865/831.5	15M	QPSK 38RB_18	Right Cheek	23.17	24.00	0.04	1.211	0.066	0.080
26865/831.5	15M	QPSK 38RB_18	Right Tilt	23.17	24.00	0.16	1.211	0.028	0.034
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)<1RB>									
26865/831.5	15M	QPSK 1RB_38	Front side	24.19	25.00	0.08	1.205	0.208	0.251
26865/831.5	15M	QPSK 1RB_38	Rear side	24.19	25.00	0.15	1.205	0.254	0.306
26865/831.5	15M	QPSK 1RB_38	Left side	24.19	25.00	0.20	1.205	0.102	0.123
26865/831.5	15M	QPSK 1RB_38	Right side	24.19	25.00	-0.11	1.205	0.095	0.114
26865/831.5	15M	QPSK 1RB_38	Bottom side	24.19	25.00	-0.13	1.205	0.188	0.227
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)<50%RB>									
26865/831.5	15M	QPSK 38RB_18	Front side	23.17	24.00	-0.18	1.211	0.112	0.136
26865/831.5	15M	QPSK 38RB_18	Rear side	23.17	24.00	0.17	1.211	0.166	0.201
26865/831.5	15M	QPSK 38RB_18	Left side	23.17	24.00	0.15	1.211	0.065	0.079
26865/831.5	15M	QPSK 38RB_18	Right side	23.17	24.00	0.06	1.211	0.060	0.073
26865/831.5	15M	QPSK 38RB_18	Bottom side	23.17	24.00	0.03	1.211	0.103	0.125

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{W/kg}$ or 1.5W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{W/kg}$ or 1.0W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{MHz}$.
- 3) Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode





7.3.11. SAR Results [LTE Band 38]

SAR Values [LTE Band 38]									
Ch/ Freq. (MHz)	BW.	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
								Measured	Reported
measured / reported SAR numbers – Head<1RB>									
38150/2610	20M	QPSK 1RB_99	Left Cheek	22.50	23.00	0.08	1.122	0.546	0.613
38150/2610	20M	QPSK 1RB_99	Left Tilt	22.50	23.00	0.12	1.122	0.387	0.434
38150/2610	20M	QPSK 1RB_99	Right Cheek	22.50	23.00	0.11	1.122	0.518	0.581
38150/2610	20M	QPSK 1RB_99	Right Tilt	22.50	23.00	0.07	1.122	0.366	0.411
measured / reported SAR numbers – Head<50%RB>									
38150/2610	20M	QPSK 50RB_50	Left Cheek	21.10	22.00	0.03	1.230	0.452	0.556
38150/2610	20M	QPSK 50RB_50	Left Tilt	21.10	22.00	-0.18	1.230	0.268	0.330
38150/2610	20M	QPSK 50RB_50	Right Cheek	21.10	22.00	0.19	1.230	0.433	0.533
38150/2610	20M	QPSK 50RB_50	Right Tilt	21.10	22.00	0.02	1.230	0.258	0.317
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)<1RB>									
38150/2610	20M	QPSK 1RB_99	Front side	22.50	23.00	-0.17	1.122	0.577	0.647
38150/2610	20M	QPSK 1RB_99	Rear side	22.50	23.00	0.08	1.122	0.653	0.733
38150/2610	20M	QPSK 1RB_99	Left side	22.50	23.00	0.10	1.122	0.423	0.475
38150/2610	20M	QPSK 1RB_99	Right side	22.50	23.00	-0.16	1.122	0.416	0.467
38150/2610	20M	QPSK 1RB_99	Bottom side	22.50	23.00	0.01	1.122	0.552	0.619
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)<50%RB>									
38150/2610	20M	QPSK 50RB_50	Front side	21.10	22.00	0.03	1.230	0.445	0.547
38150/2610	20M	QPSK 50RB_50	Rear side	21.10	22.00	0.12	1.230	0.526	0.647
38150/2610	20M	QPSK 50RB_50	Left side	21.10	22.00	0.14	1.230	0.245	0.301
38150/2610	20M	QPSK 50RB_50	Right side	21.10	22.00	0.08	1.230	0.239	0.294
38150/2610	20M	QPSK 50RB_50	Bottom side	21.10	22.00	0.11	1.230	0.426	0.524

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{W/kg}$ or 1.5W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{W/kg}$ or 1.0W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{MHz}$.
- 3) Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode





7.3.12. SAR Results [LTE Band 41]

SAR Values [LTE Band 41]									
Ch/ Freq. (MHz)	BW.	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
								Measured	Reported
measured / reported SAR numbers – Head<1RB>									
40590/2590	20M	QPSK 1RB_99	Left Cheek	21.90	22.00	-0.14	1.023	0.512	0.524
40590/2590	20M	QPSK 1RB_99	Left Tilt	21.90	22.00	0.03	1.023	0.388	0.397
40590/2590	20M	QPSK 1RB_99	Right Cheek	21.90	22.00	-0.05	1.023	0.468	0.479
40590/2590	20M	QPSK 1RB_99	Right Tilt	21.90	22.00	-0.14	1.023	0.369	0.378
measured / reported SAR numbers – Head<50%RB>									
41140/2645	20M	QPSK 50RB_50	Left Cheek	21.24	22.00	0.02	1.191	0.387	0.461
41140/2645	20M	QPSK 50RB_50	Left Tilt	21.24	22.00	-0.03	1.191	0.241	0.287
41140/2645	20M	QPSK 50RB_50	Right Cheek	21.24	22.00	0.13	1.191	0.358	0.426
41140/2645	20M	QPSK 50RB_50	Right Tilt	21.24	22.00	-0.10	1.191	0.221	0.263
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)<1RB>									
40590/2590	20M	QPSK 1RB_99	Front side	21.90	22.00	0.05	1.023	0.539	0.552
40590/2590	20M	QPSK 1RB_99	Rear side	21.90	22.00	-0.05	1.023	0.603	0.617
40590/2590	20M	QPSK 1RB_99	Left side	21.90	22.00	-0.09	1.023	0.366	0.375
40590/2590	20M	QPSK 1RB_99	Right side	21.90	22.00	-0.06	1.023	0.360	0.368
40590/2590	20M	QPSK 1RB_99	Bottom side	21.90	22.00	-0.12	1.023	0.521	0.533
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)<50%RB>									
41140/2645	20M	QPSK 50RB_50	Front side	21.24	22.00	0.03	1.191	0.315	0.375
41140/2645	20M	QPSK 50RB_50	Rear side	21.24	22.00	-0.02	1.191	0.378	0.450
41140/2645	20M	QPSK 50RB_50	Left side	21.24	22.00	-0.15	1.191	0.177	0.211
41140/2645	20M	QPSK 50RB_50	Right side	21.24	22.00	0.02	1.191	0.170	0.203
41140/2645	20M	QPSK 50RB_50	Bottom side	21.24	22.00	-0.15	1.191	0.300	0.357

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{W/kg}$ or 1.5W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{W/kg}$ or 1.0W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{MHz}$.
- 3) Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode





7.3.13. SAR Results [LTE Band 66]

SAR Values [LTE Band 66]									
Ch/ Freq. (MHz)	BW.	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
								Measured	Reported
measured / reported SAR numbers – Head <1RB>									
132322/1745	20M	QPSK 1RB_0	Left Cheek	23.56	24.00	-0.14	1.107	0.299	0.331
132322/1745	20M	QPSK 1RB_0	Left Tilt	23.56	24.00	-0.04	1.107	0.144	0.159
132322/1745	20M	QPSK 1RB_0	Right Cheek	23.56	24.00	-0.03	1.107	0.274	0.303
132322/1745	20M	QPSK 1RB_0	Right Tilt	23.56	24.00	-0.17	1.107	0.118	0.131
measured / reported SAR numbers – Head <50%RB>									
132322/1745	20M	QPSK 50RB_0	Left Cheek	22.40	23.00	0.13	1.148	0.255	0.293
132322/1745	20M	QPSK 50RB_0	Left Tilt	22.40	23.00	-0.02	1.148	0.047	0.054
132322/1745	20M	QPSK 50RB_0	Right Cheek	22.40	23.00	0.15	1.148	0.146	0.168
132322/1745	20M	QPSK 50RB_0	Right Tilt	22.40	23.00	0.05	1.148	0.035	0.040
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)<1RB>									
132322/1745	20M	QPSK 1RB_0	Front side	23.56	24.00	-0.17	1.107	0.159	0.176
132322/1745	20M	QPSK 1RB_0	Rear side	23.56	24.00	-0.15	1.107	0.259	0.287
132322/1745	20M	QPSK 1RB_0	Left side	23.56	24.00	-0.10	1.107	0.067	0.074
132322/1745	20M	QPSK 1RB_0	Right side	23.56	24.00	0.05	1.107	0.058	0.064
132322/1745	20M	QPSK 1RB_0	Bottom side	23.56	24.00	-0.08	1.107	0.127	0.141
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)<50%RB>									
132322/1745	20M	QPSK 50RB_0	Front side	22.40	23.00	0.15	1.148	0.152	0.175
132322/1745	20M	QPSK 50RB_0	Rear side	22.40	23.00	-0.05	1.148	0.249	0.286
132322/1745	20M	QPSK 50RB_0	Left side	22.40	23.00	0.07	1.148	0.062	0.071
132322/1745	20M	QPSK 50RB_0	Right side	22.40	23.00	0.04	1.148	0.051	0.059
132322/1745	20M	QPSK 50RB_0	Bottom side	22.40	23.00	-0.12	1.148	0.123	0.141

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.
- 3) Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode





7.3.14. SAR Results [WIFI 2.4G]

SAR Values [WIFI 2.4G] ANT1									
Ch/ Freq. (MHz)	Channel Type	Test Position	Duty Cycle	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
								Measured	Reported
measured / reported SAR numbers – Head									
1/2412	802.11b	Left Cheek	1.000	15.22	16.00	0.02	1.197	0.487	0.583
1/2412	802.11b	Left Tilt	1.000	15.22	16.00	0.05	1.197	0.289	0.346
1/2412	802.11b	Right Cheek	1.000	15.22	16.00	-0.16	1.197	0.452	0.541
1/2412	802.11b	Right Tilt	1.000	15.22	16.00	0.18	1.197	0.238	0.285
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)									
1/2412	802.11b	Front side	1.000	15.22	16.00	0.09	1.197	0.469	0.561
1/2412	802.11b	Rear side	1.000	15.22	16.00	-0.17	1.197	0.523	0.626
1/2412	802.11b	Left side	1.000	15.22	16.00	0.03	1.197	0.254	0.304
1/2412	802.11b	Top side	1.000	15.22	16.00	0.06	1.197	0.262	0.314

SAR Values [WIFI 2.4G] ANT2									
Ch/ Freq. (MHz)	Channel Type	Test Position	Duty Cycle	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
								Measured	Reported
measured / reported SAR numbers – Head									
6/2437	802.11b	Left Cheek	1.002	11.46	12.00	-0.11	1.132	0.211	0.240
6/2437	802.11b	Left Tilt	1.002	11.46	12.00	-0.18	1.132	0.154	0.175
6/2437	802.11b	Right Cheek	1.002	11.46	12.00	0.07	1.132	0.199	0.226
6/2437	802.11b	Right Tilt	1.002	11.46	12.00	0.09	1.132	0.142	0.161
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)									
6/2437	802.11b	Front side	1.002	11.46	12.00	0.14	1.132	0.122	0.138
6/2437	802.11b	Rear side	1.002	11.46	12.00	0.03	1.132	0.168	0.191
6/2437	802.11b	Left side	1.002	11.46	12.00	0.10	1.132	0.066	0.075
6/2437	802.11b	Top side	1.002	11.46	12.00	0.05	1.132	0.074	0.084

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB 648474 D04, Product Specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2 W/kg.
- 3) When the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR test for the other 802.11 modes are not required.





7.3.15. SAR Results [Bluetooth]

SAR Values [Bluetooth] ANT1								
Ch/ Freq. (MHz)	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
							Measured	Reported
measured / reported SAR numbers – Head<1RB>								
78/2480	DH5	Left Cheek	11.09	12.00	0.02	1.233	0.168	0.207
78/2480	DH5	Left Tilt	11.09	12.00	-0.16	1.233	0.066	0.081
78/2480	DH5	Right Cheek	11.09	12.00	0.09	1.233	0.157	0.194
78/2480	DH5	Right Tilt	11.09	12.00	0.11	1.233	0.051	0.063

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.



**7.3.16. SAR Results [WIFI 5.2G]**

SAR Values [WIFI 5.2G] ANT1									
Ch/ Freq. (MHz)	Channel Type	Test Position	Duty Cycle	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
								Measured	Reported
measured / reported SAR numbers – Head									
38/5190	802.11n 40M	Left Cheek	1.004	12.24	13.00	0.01	1.191	0.192	0.230
38/5190	802.11n 40M	Left Tilt	1.004	12.24	13.00	0.02	1.191	0.093	0.111
38/5190	802.11n 40M	Right Cheek	1.004	12.24	13.00	-0.16	1.191	0.085	0.102
38/5190	802.11n 40M	Right Tilt	1.004	12.24	13.00	0.03	1.191	0.088	0.105
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)									
38/5190	802.11n 40M	Front side	1.004	12.24	13.00	-0.14	1.191	0.125	0.150
38/5190	802.11n 40M	Rear side	1.004	12.24	13.00	-0.12	1.191	0.161	0.193
38/5190	802.11n 40M	Left side	1.004	12.24	13.00	0.17	1.191	0.045	0.054
38/5190	802.11n 40M	Top side	1.004	12.24	13.00	0.02	1.191	0.048	0.057

SAR Values [WIFI 5.2G] ANT2									
Ch/ Freq. (MHz)	Channel Type	Test Position	Duty Cycle	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
								Measured	Reported
measured / reported SAR numbers – Head									
40/5200	802.11ac 20M	Left Cheek	1.267	11.01	12.00	-0.17	1.256	0.122	0.194
40/5200	802.11ac 20M	Left Tilt	1.267	11.01	12.00	0.02	1.256	0.052	0.083
40/5200	802.11ac 20M	Right Cheek	1.267	11.01	12.00	-0.10	1.256	0.110	0.175
40/5200	802.11ac 20M	Right Tilt	1.267	11.01	12.00	0.03	1.256	0.041	0.065
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)									
40/5200	802.11ac 20M	Front side	1.267	11.01	12.00	0.01	1.256	0.088	0.140
40/5200	802.11ac 20M	Rear side	1.267	11.01	12.00	0.12	1.256	0.136	0.216
40/5200	802.11ac 20M	Left side	1.267	11.01	12.00	0.20	1.256	0.036	0.057
40/5200	802.11ac 20M	Top side	1.267	11.01	12.00	0.05	1.256	0.044	0.070

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) When the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR test for the other 802.11 modes are not required.
- 3) When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n.





7.3.17. SAR Results [WIFI 5.8G]

SAR Values [WIFI 5.8G] ANT1									
Ch/ Freq. (MHz)	Channel Type	Duty Cycle	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
								Measured	Reported
measured / reported SAR numbers – Head									
159/5795	802.11n 40M	1.062	Left Cheek	8.25	9.00	-0.11	1.189	0.078	0.154
159/5795	802.11n 40M	1.062	Left Tilt	8.25	9.00	-0.18	1.189	0.036	0.121
159/5795	802.11n 40M	1.062	Right Cheek	8.25	9.00	0.07	1.189	0.070	0.066
159/5795	802.11n 40M	1.062	Right Tilt	8.25	9.00	0.13	1.189	0.027	0.139
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)									
159/5795	802.11n 40M	1.062	Front side	8.25	9.00	-0.11	1.189	0.045	0.057
159/5795	802.11n 40M	1.062	Rear side	8.25	9.00	0.09	1.189	0.066	0.083
159/5795	802.11n 40M	1.062	Left side	8.25	9.00	0.04	1.189	0.021	0.026
159/5795	802.11n 40M	1.062	Top side	8.25	9.00	0.05	1.189	0.025	0.032

SAR Values [WIFI 5.8G] ANT2									
Ch/ Freq. (MHz)	Channel Type	Duty Cycle	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
								Measured	Reported
measured / reported SAR numbers – Head									
165/5825	802.11ac 20M	1.267	Left Cheek	8.39	9.00	0.15	1.151	0.085	0.124
165/5825	802.11ac 20M	1.267	Left Tilt	8.39	9.00	0.11	1.151	0.041	0.060
165/5825	802.11ac 20M	1.267	Right Cheek	8.39	9.00	0.20	1.151	0.080	0.117
165/5825	802.11ac 20M	1.267	Right Tilt	8.39	9.00	0.03	1.151	0.033	0.048
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)									
165/5825	802.11ac 20M	1.267	Front side	8.39	9.00	-0.11	1.151	0.047	0.069
165/5825	802.11ac 20M	1.267	Rear side	8.39	9.00	0.03	1.151	0.089	0.130
165/5825	802.11ac 20M	1.267	Left side	8.39	9.00	-0.11	1.151	0.021	0.031
165/5825	802.11ac 20M	1.267	Top side	8.39	9.00	-0.17	1.151	0.028	0.041

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) When the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR test for the other 802.11 modes are not required.
- 3) When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n.





7.4. Multiple Transmitter Evaluation

7.4.1. Simultaneous SAR test evaluation

Simultaneous Transmission Possibilities

NO.	Simultaneous Tx Combination	Head	Body	Hotspot
1	GSM Voice + WiFi 2.4G Ant1+ WiFi 2.4G Ant2	Yes	Yes	Yes
2	GSM DATA + WiFi 2.4G Ant1+ WiFi 2.4G Ant2	Yes	Yes	Yes
3	GSM Voice + WiFi 5G Ant1+ WiFi 5G Ant2+ BT Ant1	Yes	Yes	Yes
4	GSM DATA + WiFi 5G Ant1+ WiFi 5G Ant2+ BT Ant1	Yes	Yes	Yes
6	UMTS + WiFi 2.4G Ant1+ WiFi 2.4G Ant2	Yes	Yes	Yes
7	UMTS + WiFi 5G Ant1+ WiFi 5G Ant2+ BT Ant1	Yes	Yes	Yes
8	LTE + WiFi 2.4G Ant1+ WiFi 2.4G Ant2	Yes	Yes	Yes
9	LTE + WiFi 5G Ant1+ WiFi 5G Ant2+ BT Ant1	Yes	Yes	Yes

Note:

- 1) Wi-Fi 2.4G and Wi-Fi 5G can't transmit simultaneously.
- 2) Wi-Fi 2.4G and BT can't transmit simultaneously.
- 3) The device does not support DTM function.





7.4.2. Simultaneous Transmission SAR Summation Scenario

Test position		Main Antenna SARmax (W/kg)												WiFi Antenna SARmax (W/kg)		Summed 1g SARmax (W/kg)
		GS M 850	GS M 1900	WCDMA Band II	WCDMA Band IV	WCDMA Band V	LTE Band 7	LTE Band 13	LTE Band 25	LTE Band 26	LTE Band 38	LTE Band 41	LTE Band 66	WLAN 2.4G ANT 1	WLAN 2.4G ANT 2	
Head	Left cheek	0.181	0.207	0.178	0.173	0.190	0.600	0.247	0.204	0.208	0.613	0.524	0.331	0.583	0.240	1.436
	Left tilted	0.097	0.108	0.098	0.094	0.114	0.449	0.109	0.133	0.099	0.434	0.397	0.159	0.346	0.175	0.970
	Right cheek	0.168	0.192	0.168	0.200	0.220	0.580	0.247	0.224	0.184	0.581	0.479	0.303	0.541	0.226	1.348
	Right tilted	0.088	0.098	0.091	0.101	0.127	0.439	0.127	0.148	0.073	0.411	0.378	0.131	0.285	0.161	0.885
Body	Front side	0.271	0.104	0.117	0.128	0.288	0.666	0.356	0.193	0.301	0.647	0.552	0.176	0.561	0.138	1.365
	Back side	0.320	0.192	0.161	0.183	0.333	0.759	0.413	0.238	0.363	0.733	0.617	0.287	0.626	0.191	1.576
	Left side	0.183	0.053	0.053	0.070	0.197	0.541	0.180	0.122	0.191	0.475	0.375	0.074	0.304	0.075	0.920
	Right side	0.175	0.047	0.049	0.063	0.187	0.532	0.171	0.115	0.180	0.467	0.368	0.064	/	/	0.532
	Top side	/	/	/	/	/	/	/	/	/	/	/	/	0.314	0.084	0.398
	Bottom side	0.260	0.084	0.102	0.121	0.282	0.654	0.334	0.185	0.274	0.619	0.533	0.141	/	/	0.654

Test position		Main Antenna SARmax (W/kg)												WiFi/BT Antenna SARmax (W/kg)					Summed 1g SARmax (W/kg)
		GS M 850	GS M 1900	WCDMA Band II	WCDMA Band IV	WCDMA Band V	LTE Band 7	LTE Band 13	LTE Band 25	LTE Band 26	LTE Band 38	LTE Band 41	LTE Band 66	WLAN 5.2G ANT 1	WLAN 5.2G ANT 2	WLAN 5.8G ANT 1	WLAN 5.8G ANT 2	BT ANT 1	
Head	Left cheek	0.181	0.207	0.178	0.173	0.190	0.600	0.247	0.204	0.208	0.613	0.524	0.331	0.230	0.194	0.154	0.124	0.207	1.244
	Left tilted	0.097	0.108	0.098	0.094	0.114	0.449	0.109	0.133	0.099	0.434	0.397	0.159	0.111	0.083	0.121	0.060	0.081	0.724
	Right cheek	0.168	0.192	0.168	0.200	0.220	0.580	0.247	0.224	0.184	0.581	0.479	0.303	0.102	0.175	0.066	0.117	0.194	1.052
	Right tilted	0.088	0.098	0.091	0.101	0.127	0.439	0.127	0.148	0.073	0.411	0.378	0.131	0.105	0.065	0.139	0.048	0.063	0.689
Body	Front side	0.271	0.104	0.117	0.128	0.288	0.666	0.356	0.193	0.301	0.647	0.552	0.176	0.150	0.140	0.057	0.069	/	0.956
	Back side	0.320	0.192	0.161	0.183	0.333	0.759	0.413	0.238	0.363	0.733	0.617	0.287	0.193	0.216	0.083	0.130	/	1.168
	Left side	0.183	0.053	0.053	0.070	0.197	0.541	0.180	0.122	0.191	0.475	0.375	0.074	0.054	0.057	0.026	0.031	/	0.652
	Right side	0.175	0.047	0.049	0.063	0.187	0.532	0.171	0.115	0.180	0.467	0.368	0.064	/	/	/	/	/	0.532
	Top side	/	/	/	/	/	/	/	/	/	/	/	/	0.057	0.070	0.032	0.041	/	0.127
	Bottom side	0.260	0.084	0.102	0.121	0.282	0.654	0.334	0.185	0.274	0.619	0.533	0.141	/	/	/	/	/	0.654





Appendix A: Detailed System Check Results

Appendix B: Detailed Test Results

Appendix C: Calibration certificate

Appendix D: Photographs

.....The End of Test Report.....

