




802.11g 20MHz Chain0 2412MHz

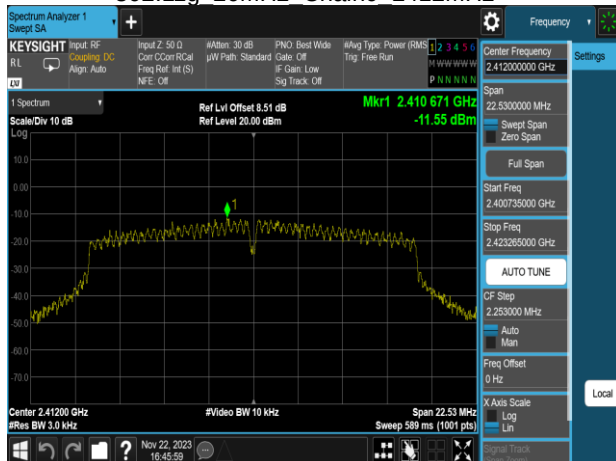


802.11g 20MHz Chain1 2412MHz

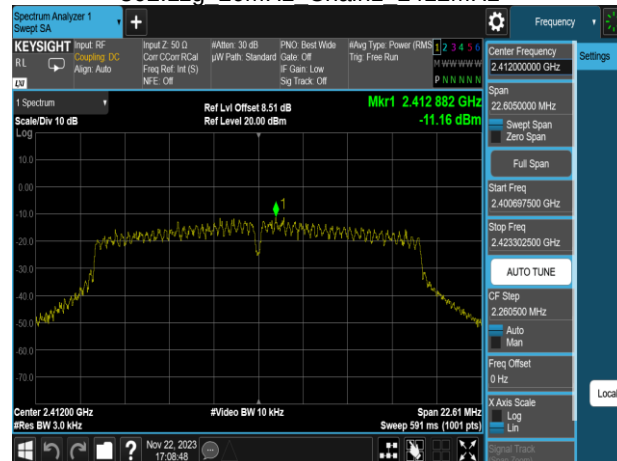


802.11g 20MHz Chain0 2437MHz

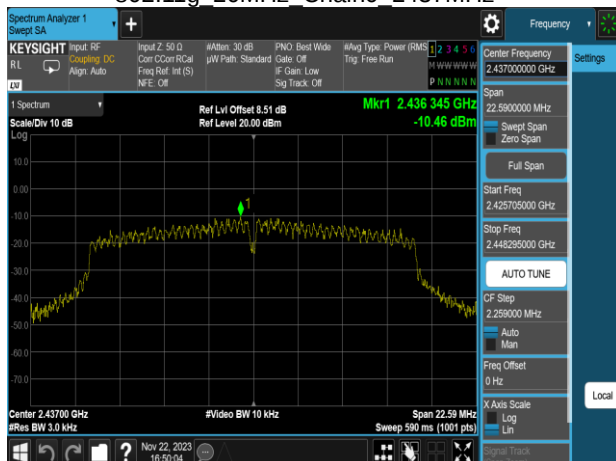


802.11g 20MHz Chain1 2437MHz

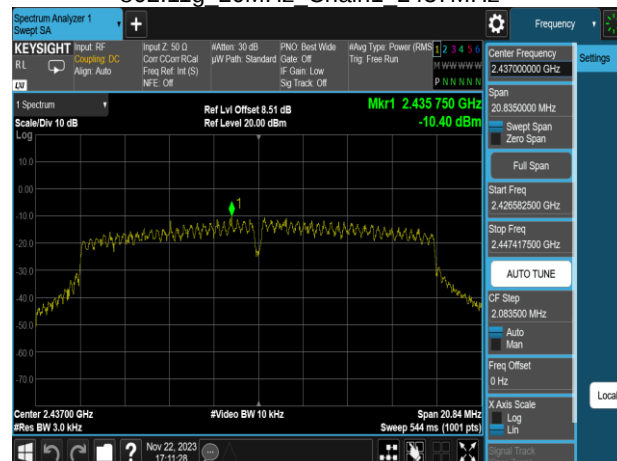


802.11g 20MHz Chain0 2462MHz

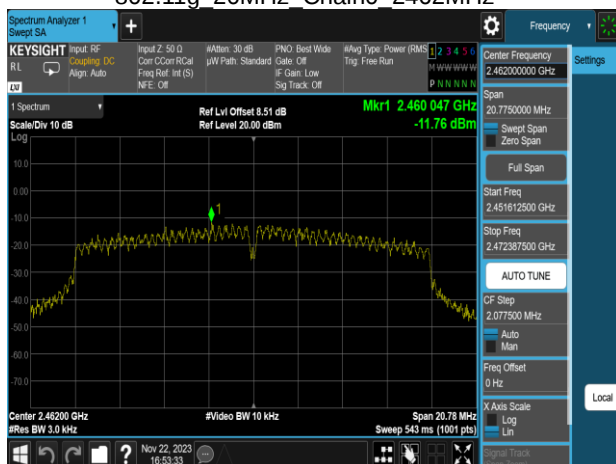


802.11g 20MHz Chain1 2462MHz

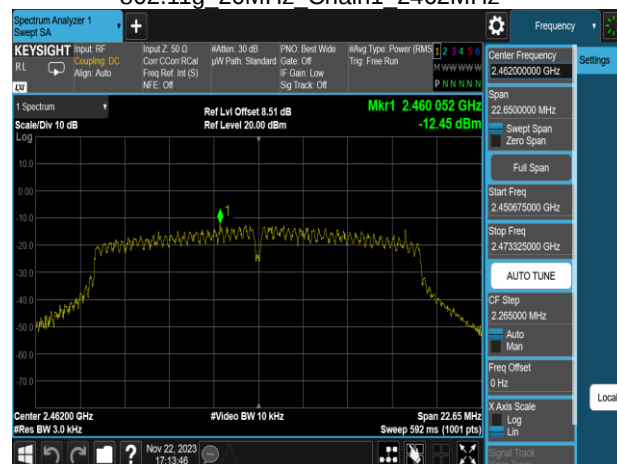


802.11n 20MHz Chain0 2412MHz

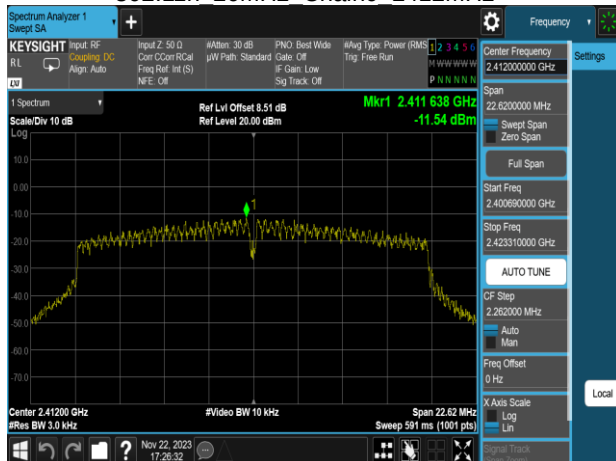


802.11n 20MHz Chain1 2412MHz

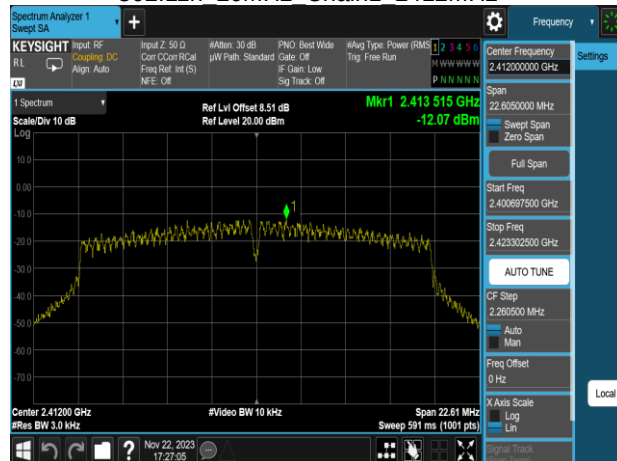


802.11n 20MHz Chain0 2437MHz

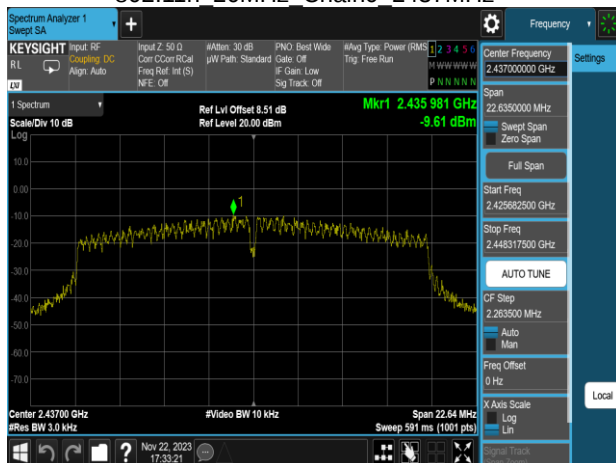


802.11n 20MHz Chain1 2437MHz

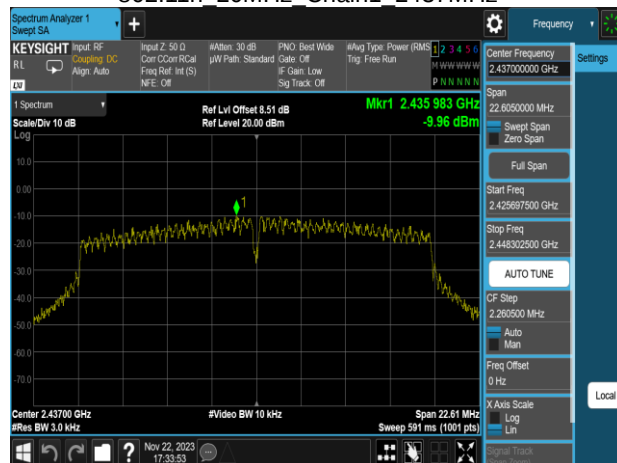


802.11n 20MHz Chain0 2462MHz

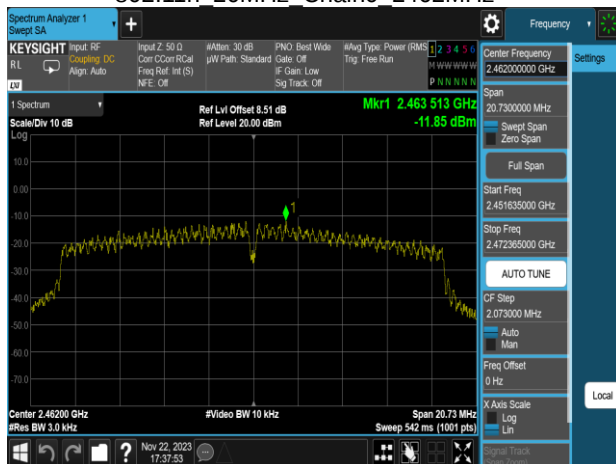


802.11n 20MHz Chain1 2462MHz

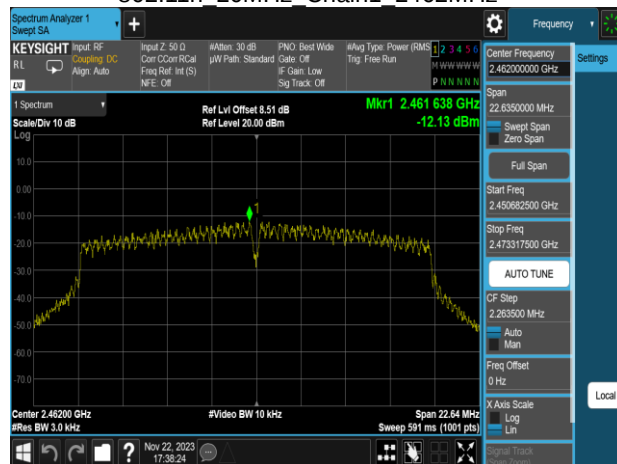


802.11n 40MHz Chain0 2422MHz

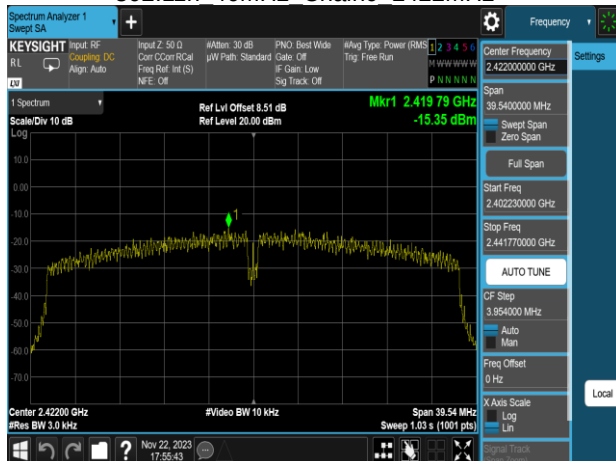


802.11n 40MHz Chain1 2422MHz

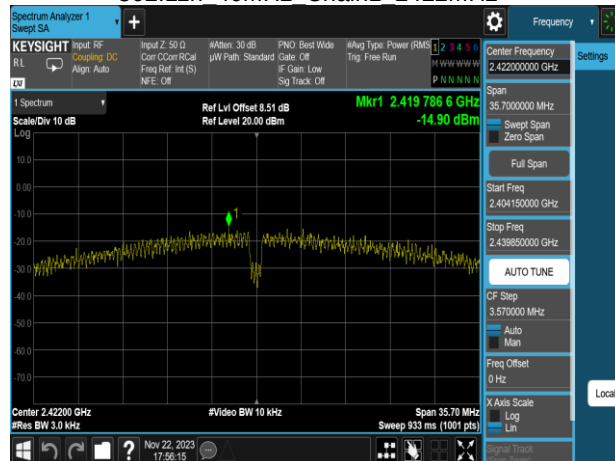


802.11n 40MHz Chain0 2437MHz

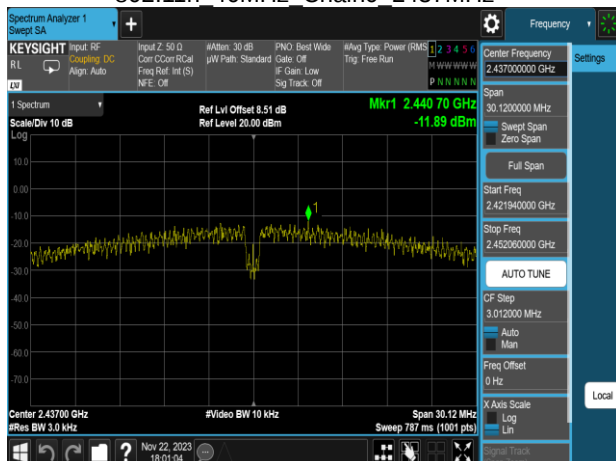


802.11n 40MHz Chain1 2437MHz

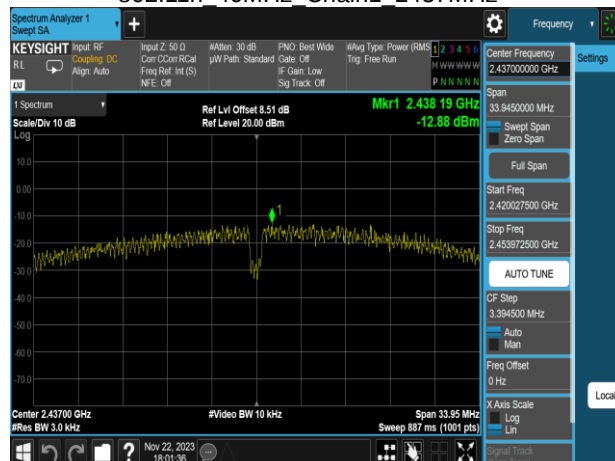

802.11n 40MHz Chain0 2452MHz

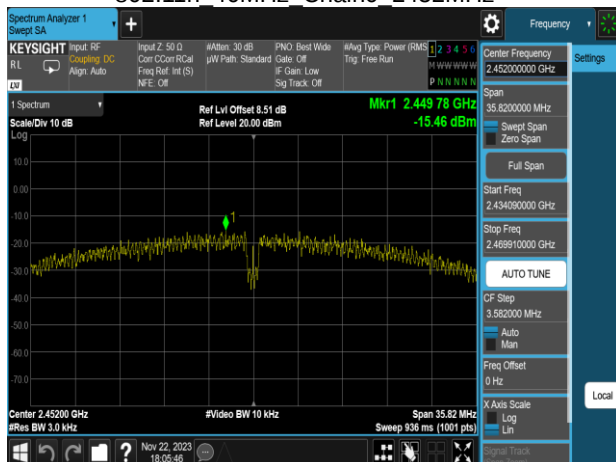

802.11n 40MHz Chain1 2452MHz

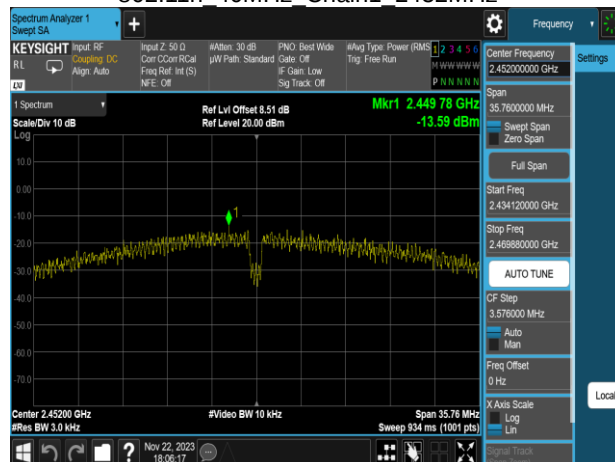

5.5 CONDUCTED BANDEDGE AND SPURIOUS EMISSION

5.5.1 Test Limit

According to §15.247(d),

In any 100 kHz bandwidth outside the authorized frequency band,

Non-restricted bands shall be attenuated at least 20 dB/30 dB relative to the maximum PSD level in 100 kHz by RF conducted or a radiated measurement which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

5.5.2 Test Procedure

Test method Refer as KDB 662911 D01, KDB 558074 D01.

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. In any 100 kHz bandwidth outside the authorized frequency band, shall be attenuated at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when conducted power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

5.5.3 Test Setup



5.5.4 Test Result


Test Data

Temperature: 21.9 ~ 24.2°C
Humidity: 50 ~ 61% RH


Test Date: November 16 ~ 22, 2023
Tested by: Marco Chan

Test Data Reference


802.11b 20MHz Chain0 2412MHz

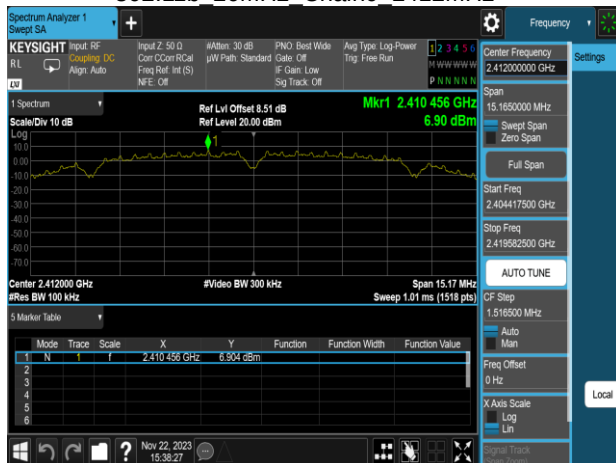

802.11b 20MHz Chain1 2412MHz

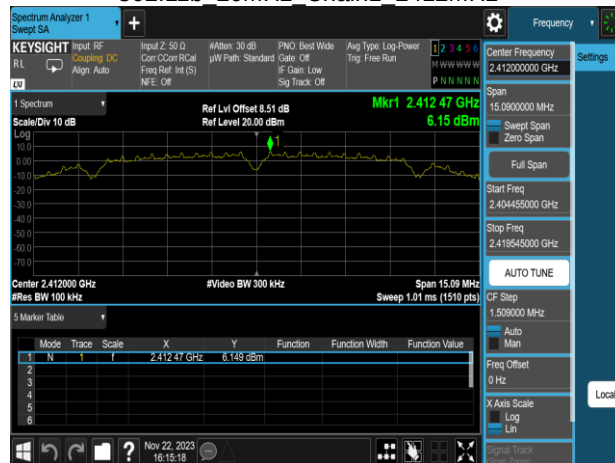


802.11b 20MHz Chain0 2437MHz

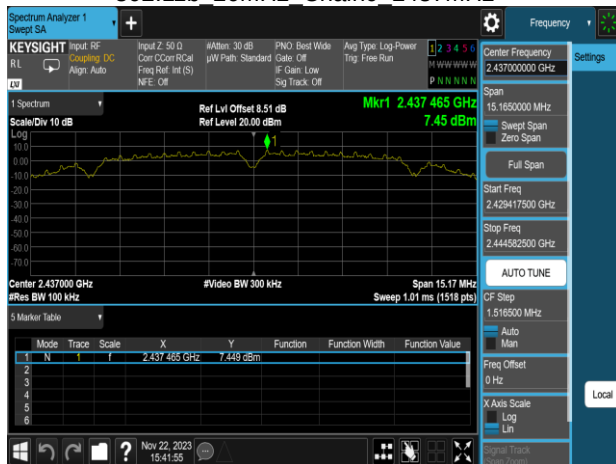


802.11b 20MHz Chain1 2437MHz



802.11b 20MHz Chain0 2462MHz

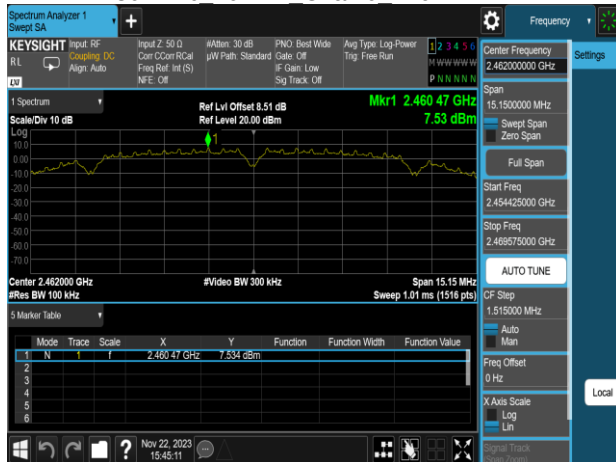

802.11b 20MHz Chain1 2462MHz

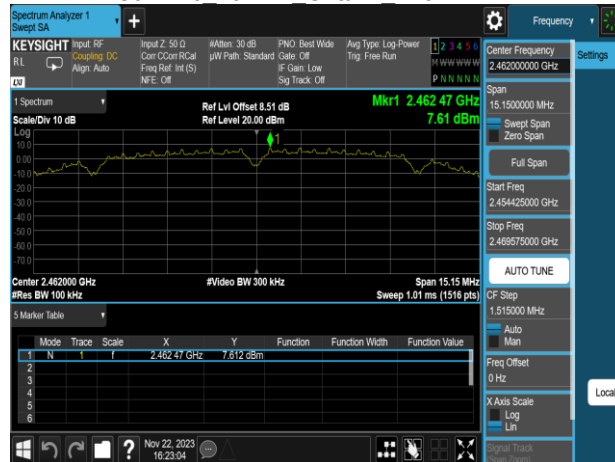

802.11g 20MHz Chain0 2412MHz



802.11g 20MHz Chain1 2412MHz




802.11g 20MHz Chain0 2437MHz




802.11g 20MHz Chain1 2437MHz



802.11g 20MHz Chain0 2462MHz

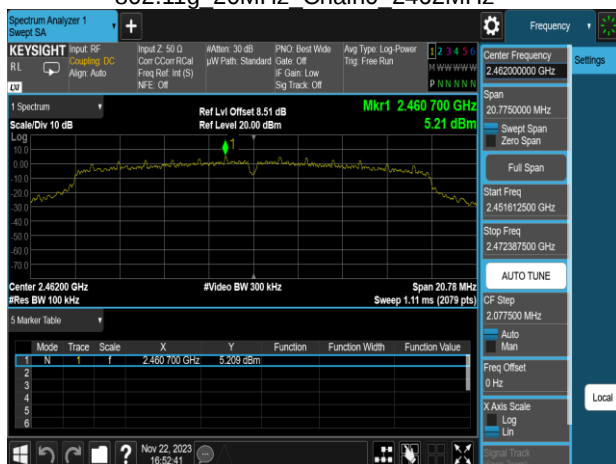

802.11g 20MHz Chain1 2462MHz

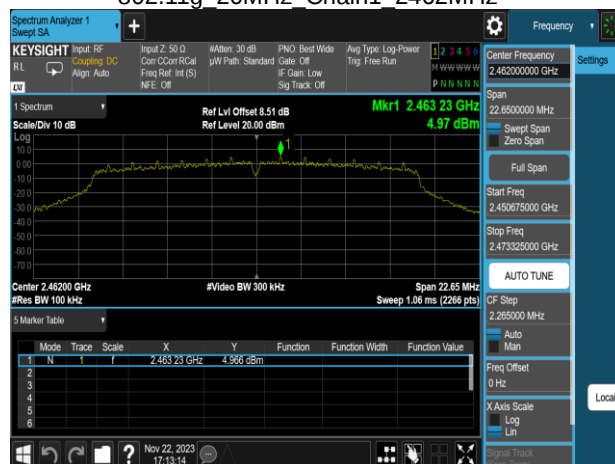

802.11n 20MHz Chain0 2412MHz



802.11n 20MHz Chain1 2412MHz



802.11n 20MHz Chain0 2437MHz



802.11n 20MHz Chain1 2437MHz



802.11n 20MHz Chain0 2462MHz



802.11n 20MHz Chain1 2462MHz



802.11n 40MHz Chain0 2422MHz



802.11n 40MHz Chain1 2422MHz



802.11n 40MHz Chain0 2437MHz



802.11n 40MHz Chain1 2437MHz



802.11n 40MHz Chain0 2452MHz




802.11n 40MHz Chain1 2452MHz



Band Edge

802.11b 20MHz Chain0 2412MHz

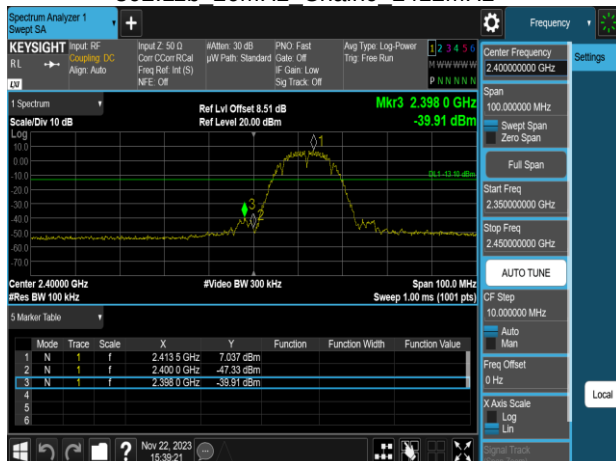

802.11b 20MHz Chain1 2412MHz







802.11b 20MHz Chain0 2462MHz



802.11b 20MHz Chain1 2462MHz



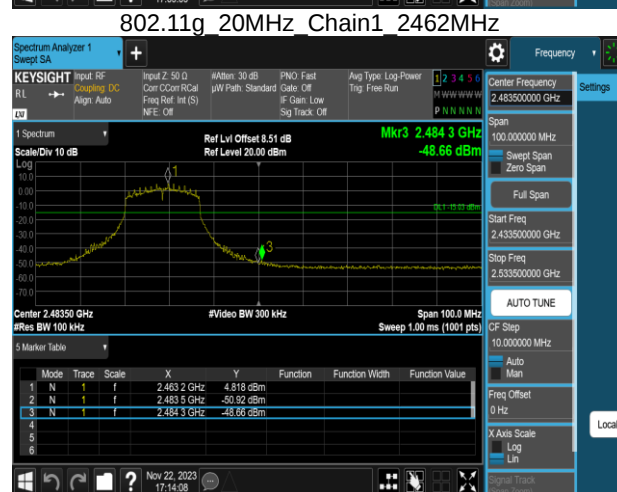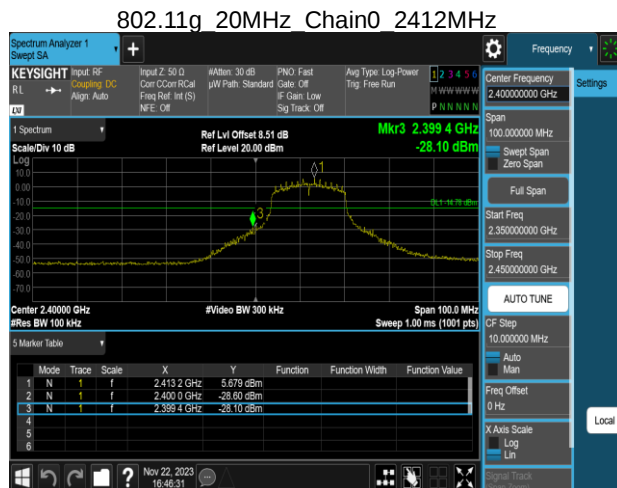


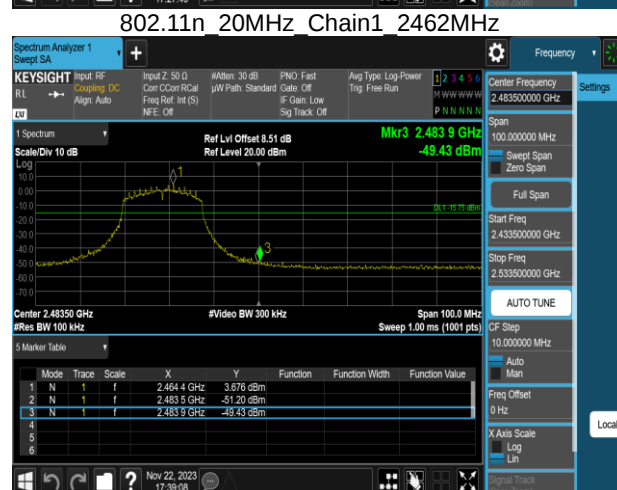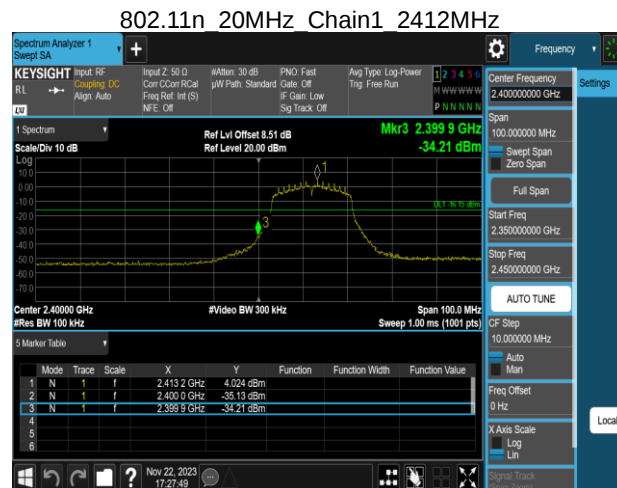

802.11n 40MHz Chain0 2422MHz



802.11n 40MHz Chain1 2422MHz

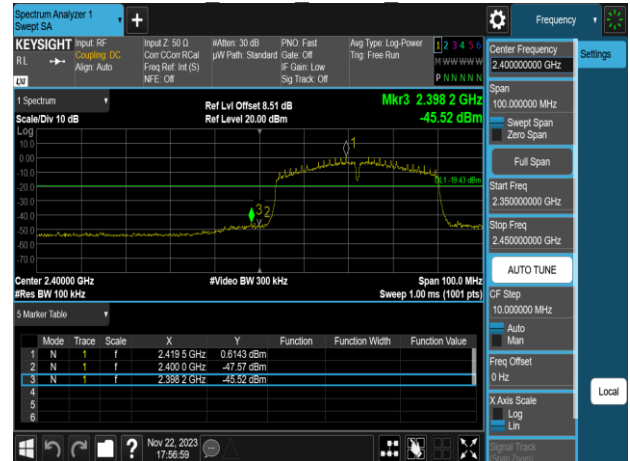

802.11n 40MHz Chain0 2452MHz




802.11n 40MHz Chain1 2452MHz




Spurious Emission

802.11b 20MHz Chain0 2412MHz

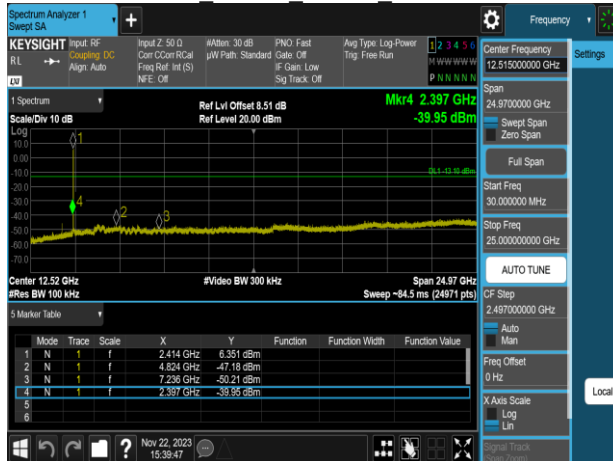


802.11b 20MHz Chain1 2412MHz

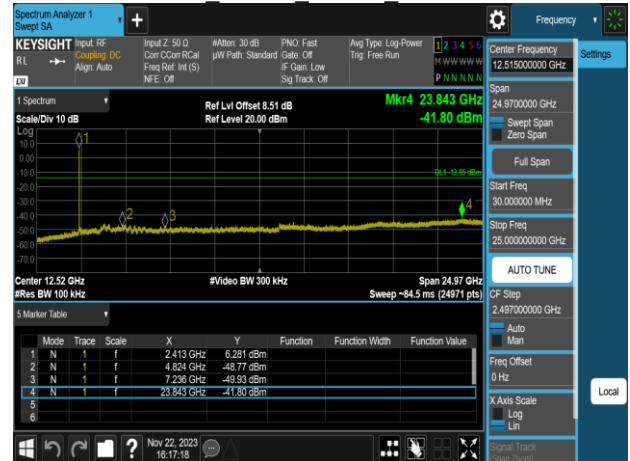

802.11b 20MHz Chain0 2437MHz



802.11b 20MHz Chain1 2437MHz

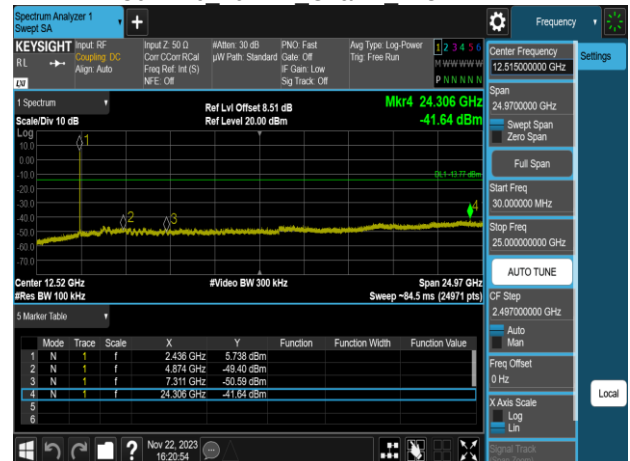

802.11b 20MHz Chain0 2462MHz



802.11b 20MHz Chain1 2462MHz

