
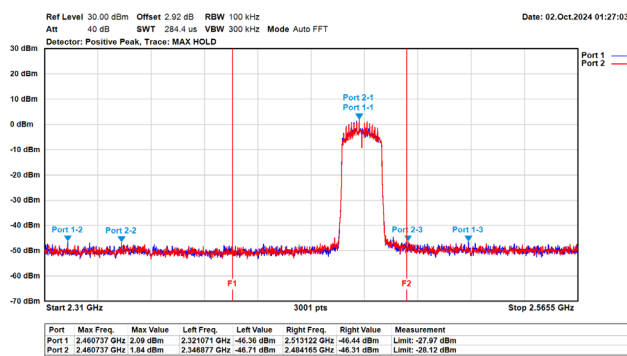
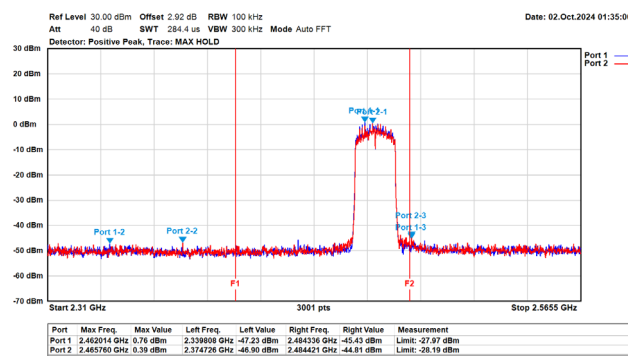
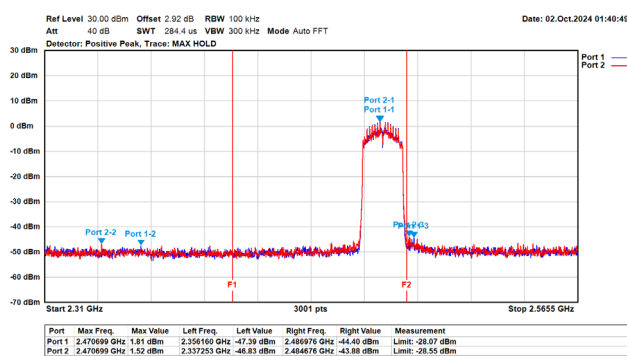
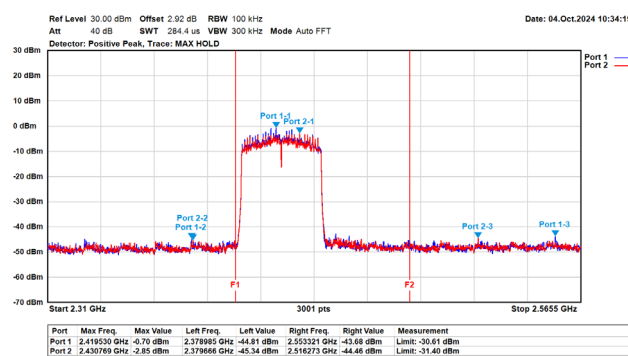
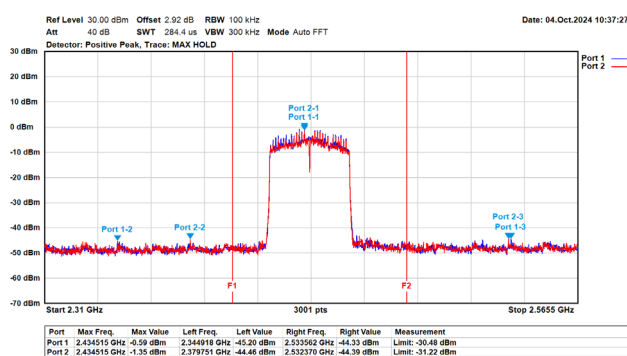
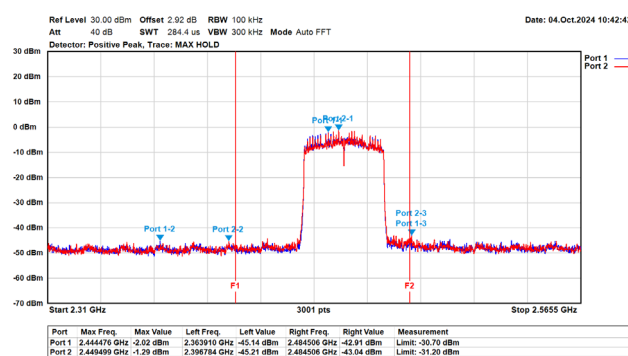



802.11be (20 MHz) / 2462 MHz (Band Edge)**802.11be (20 MHz) / 2467 MHz (Band Edge)****802.11be (20 MHz) / 2472 MHz (Band Edge)****802.11be (40 MHz) / 2422 MHz (Band Edge)****802.11be (40 MHz) / 2437 MHz (Band Edge)****802.11be (40 MHz) / 2452 MHz (Band Edge)**

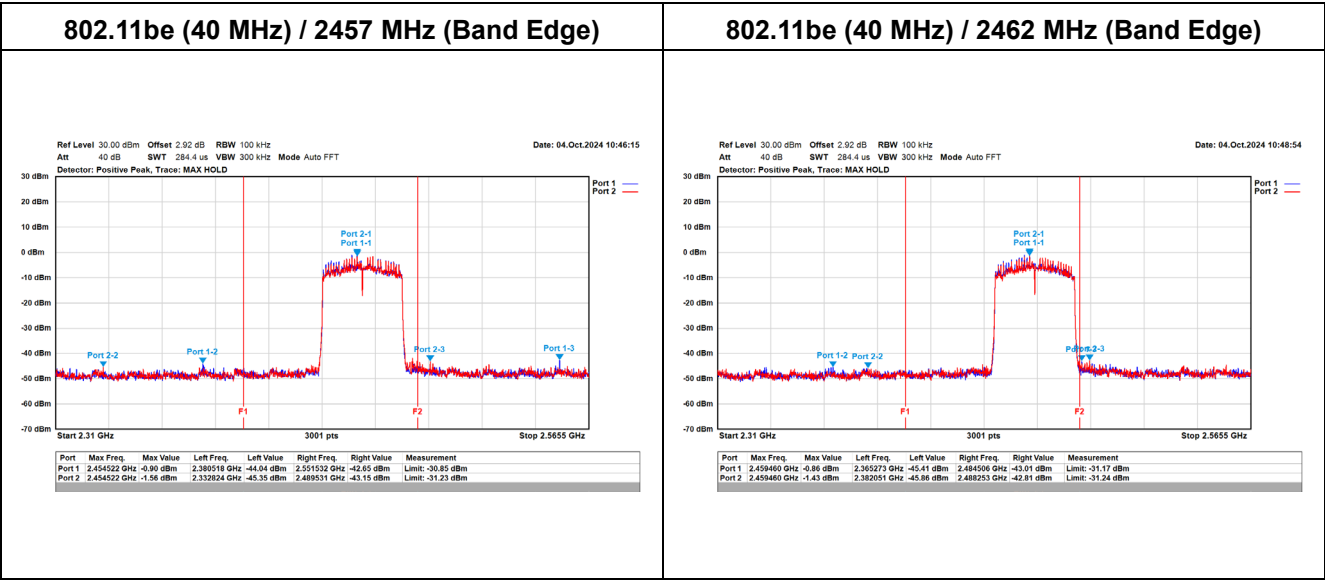

Appendix F. Test Result of Transmitter Radiated Spurious Emission

30 MHz ~ 1 GHz

Site :HC-CB04
Condition :3m Horizontal
Mode :LF_be40_TX_2437MHz
Test By :Ling Chen

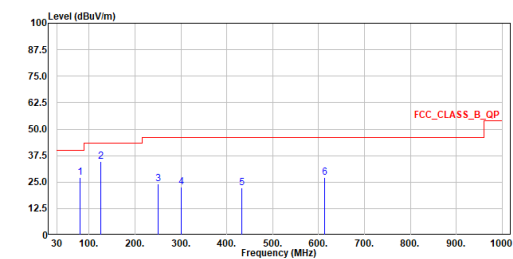


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	80.004	27.30	40.00	-12.70	34.30	-7.00	QP
2	125.012	34.60	43.50	-8.90	39.42	-4.82	QP
3	249.996	24.02	46.00	-21.98	28.42	-4.40	QP
4	300.000	22.72	46.00	-23.28	25.29	-2.57	QP
5	432.453	22.14	46.00	-23.86	21.14	1.00	QP
6	612.388	27.01	46.00	-18.99	21.88	5.13	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m Vertical
Mode :LF_be40_TX_2437MHz
Test By :Ling Chen

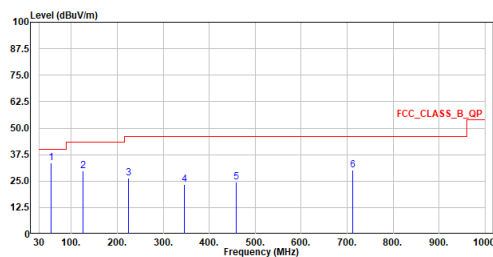


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	56.239	33.54	40.00	-6.46	36.37	-2.83	QP
2	124.963	29.81	43.50	-13.69	34.63	-4.82	QP
3	225.019	26.52	46.00	-19.48	32.88	-6.36	QP
4	345.832	23.24	46.00	-22.76	24.66	-1.42	QP
5	458.158	24.51	46.00	-21.49	22.83	1.68	QP
6	711.571	30.14	46.00	-15.86	23.70	6.44	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Above 1 GHz

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :b_TX_2412MHz
Test By :Cyril Chen

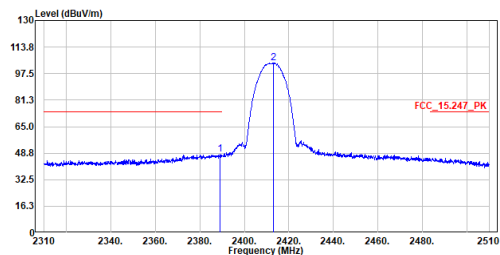


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2389.200	47.87	74.00	-26.13	37.47	10.40	Peak
2	2412.000	104.22	-----	-----	93.75	10.47	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 1
Mode :b_TX_2412MHz
Test By :Cyril Chen

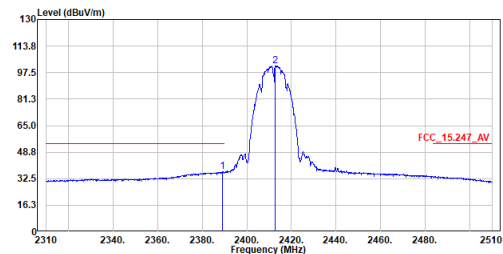


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2389.200	36.61	54.00	-17.39	26.21	10.40	Average
2	2412.800	101.72	-----	-----	91.25	10.47	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :b_TX_2412MHz
Test By :Cyril Chen

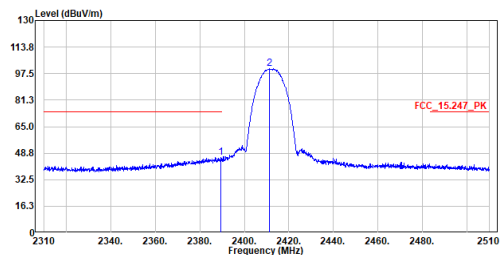


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2389.500	46.11	74.00	-27.89	35.70	10.41	Peak
2	2411.200	100.49	-----	-----	90.02	10.47	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 1
Mode :b_TX_2412MHz
Test By :Cyril Chen

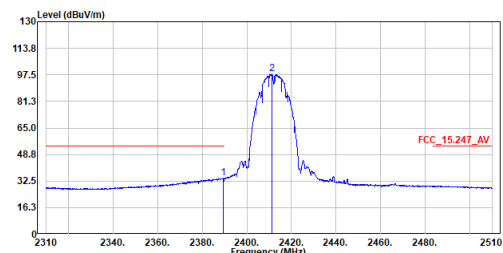


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2389.400	34.23	54.00	-19.77	23.82	10.41	Average
2	2411.200	97.91	-----	-----	87.44	10.47	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :b_TX_2412MHz
Test By :Cyril Chen

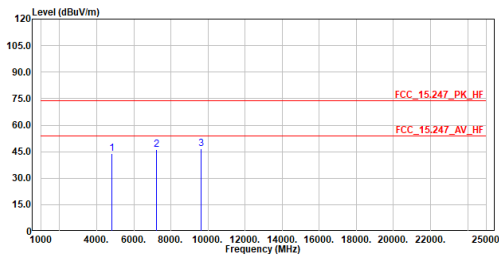


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4824.000	44.03	74.00	-29.97	61.79	-17.76	Peak
2	7236.000	46.17	74.00	-27.83	58.95	-12.78	Peak
3	9648.000	46.85	74.00	-27.15	55.94	-9.09	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :b_TX_2412MHz
Test By :Cyril Chen

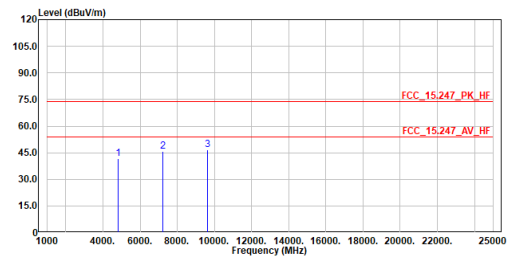


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4824.000	41.48	74.00	-32.52	59.24	-17.76	Peak
2	7236.000	45.62	74.00	-28.38	58.40	-12.78	Peak
3	9648.000	46.45	74.00	-27.55	55.54	-9.09	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :b_TX_2437MHz
Test By :Cyril Chen

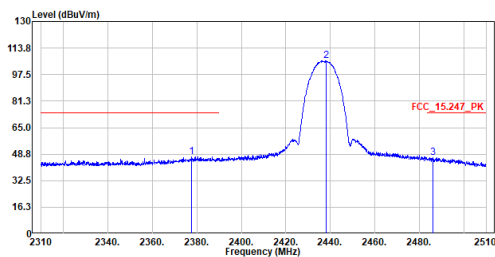


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2377.700	47.21	74.00	-26.79	36.83	10.38	Peak
2	2438.000	105.86	-----	-----	95.34	10.52	Peak
3	2486.000	46.77	74.00	-27.23	36.12	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 1
Mode :b_TX_2437MHz
Test By :Cyril Chen

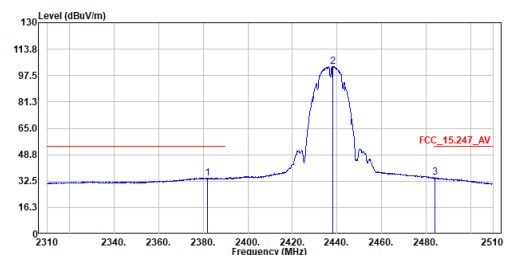


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2381.800	34.35	54.00	-19.65	23.97	10.38	Average
2	2438.200	103.06	-----	-----	92.54	10.52	Average
3	2483.800	34.60	54.00	-19.40	23.95	10.65	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :b_TX 2437MHz
Test By :Cyril Chen

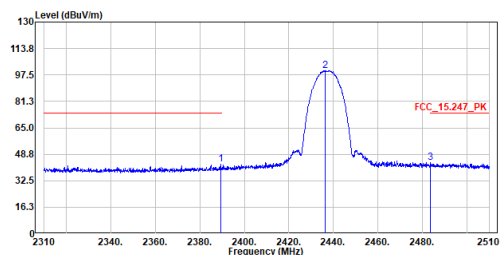


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	2389.400	42.53	74.00	-31.47	32.12	10.41	Peak
2	2436.200	100.26	74.00	26.26	89.74	10.52	Peak
3	2483.700	43.53	74.00	-30.47	32.88	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 1
Mode :b_TX 2437MHz
Test By :Cyril Chen

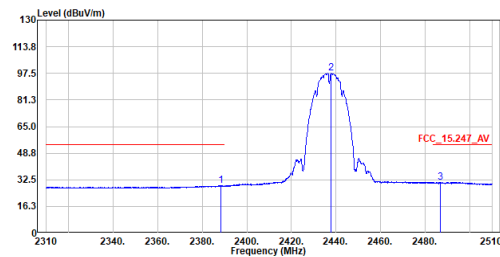


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	2388.300	29.03	54.00	-24.97	18.63	10.40	Average
2	2437.800	97.71	74.00	23.71	87.19	10.52	Average
3	2486.700	30.99	54.00	-23.01	20.34	10.65	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :b_TX 2437MHz
Test By :Cyril Chen

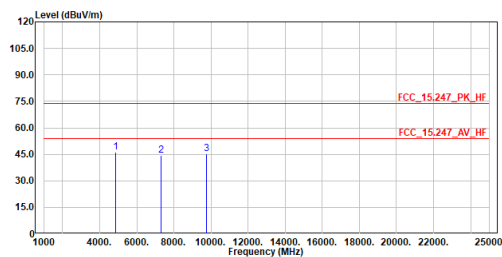


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	4874.000	46.02	74.00	-27.98	63.64	-17.62	Peak
2	7311.000	44.21	74.00	-29.79	56.87	-12.66	Peak
3	9748.000	45.31	74.00	-28.69	54.29	-8.98	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :b_TX 2437MHz
Test By :Cyril Chen

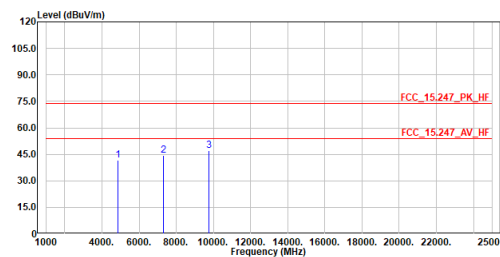


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	4874.000	41.88	74.00	-32.12	59.50	-17.62	Peak
2	7311.000	44.43	74.00	-29.57	57.09	-12.66	Peak
3	9748.000	46.95	74.00	-27.05	55.93	-8.98	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :b_TX_2462MHz
Test By :Cyril Chen

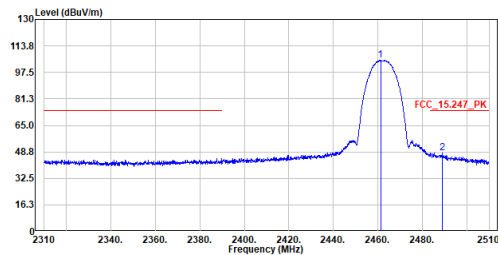


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2461.200	105.13	-----	-----	94.55	10.58	Peak
2	2488.900	48.26	74.00	-25.74	37.61	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 1
Mode :b_TX_2462MHz
Test By :Cyril Chen

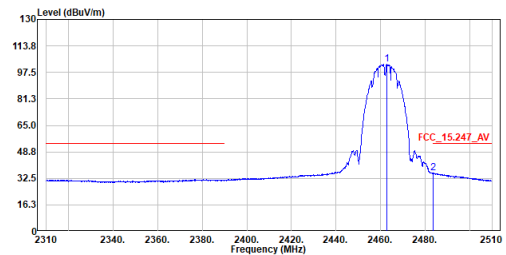


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2462.800	102.48	-----	-----	91.89	10.59	Average
2	2483.600	35.66	54.00	-18.34	25.02	10.64	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :b_TX_2462MHz
Test By :Cyril Chen

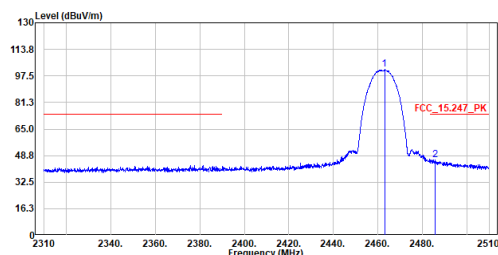


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2462.000	101.37	-----	-----	90.78	10.59	Peak
2	2485.600	46.09	74.00	-27.91	35.44	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 1
Mode :b_TX_2462MHz
Test By :Cyril Chen

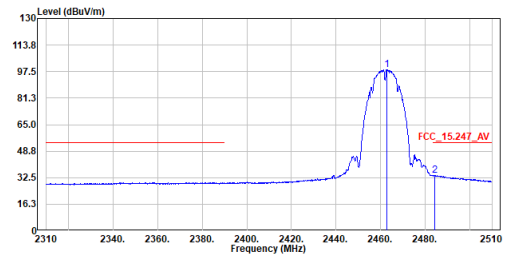


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2462.800	98.73	-----	-----	88.14	10.59	Average
2	2484.200	33.86	54.00	-20.14	23.21	10.65	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :b_TX_2462MHz
Test By :Cyril Chen

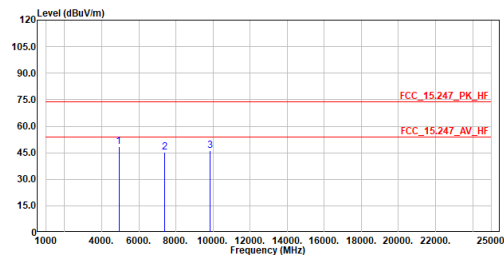


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	4924.000	48.46	74.00	-25.54	65.95	-17.49	Peak
2	7386.000	45.13	74.00	-28.87	57.66	-12.53	Peak
3	9848.000	46.33	74.00	-27.67	55.18	-8.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :b_TX_2462MHz
Test By :Cyril Chen

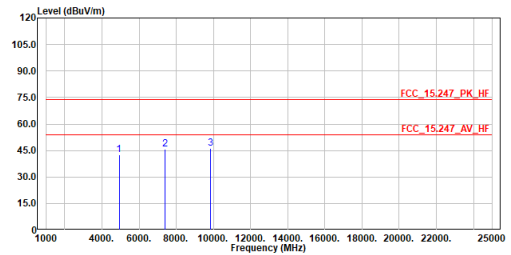


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	4924.000	42.68	74.00	-31.32	60.17	-17.49	Peak
2	7386.000	45.66	74.00	-28.34	58.19	-12.53	Peak
3	9848.000	46.18	74.00	-27.82	55.03	-8.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :b_TX_2467MHz
Test By :Cyril Chen

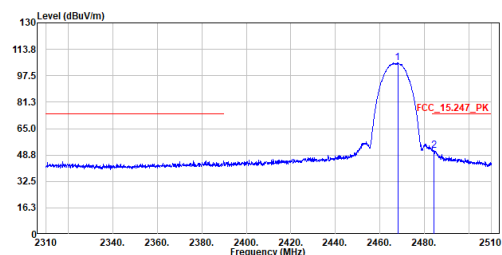


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	2468.000	105.31	-----	-----	94.70	10.61	Peak
2	2484.300	51.67	74.00	-22.33	41.02	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 1
Mode :b_TX_2467MHz
Test By :Cyril Chen

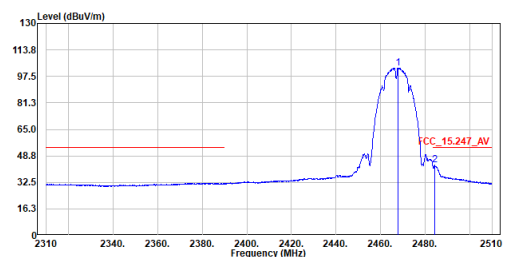


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	2467.800	102.76	-----	-----	92.16	10.60	Average
2	2484.200	43.15	54.00	-10.85	32.50	10.65	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :b_TX_2467MHz
Test By :Cyril Chen

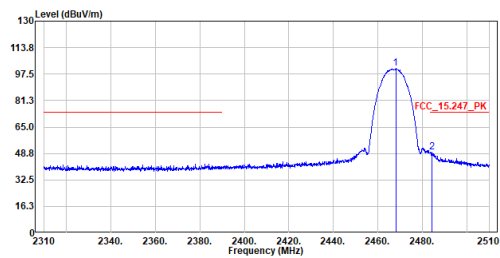


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2468.000	100.86	-----	-----	98.25	10.61	Peak
2	2484.300	49.38	74.00	-24.62	38.73	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 1
Mode :b_TX_2467MHz
Test By :Cyril Chen

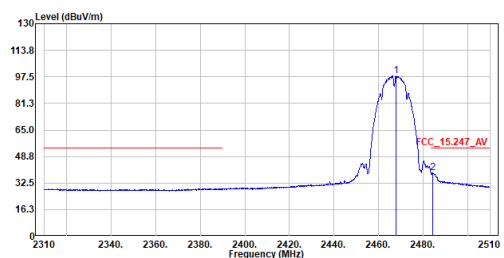


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2467.800	98.17	-----	-----	87.57	10.60	Average
2	2484.300	38.77	54.00	-15.23	28.12	10.65	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :b_TX_2467MHz
Test By :Cyril Chen

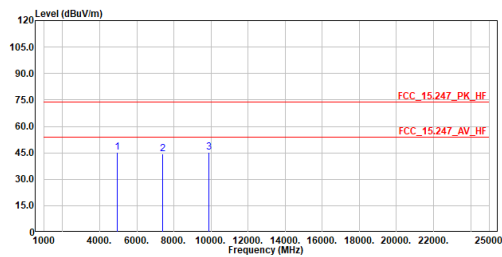


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4934.000	45.08	74.00	-28.92	62.54	-17.46	Peak
2	7401.000	44.18	74.00	-29.82	56.69	-12.51	Peak
3	9868.000	45.15	74.00	-28.85	53.98	-8.83	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :b_TX_2467MHz
Test By :Cyril Chen

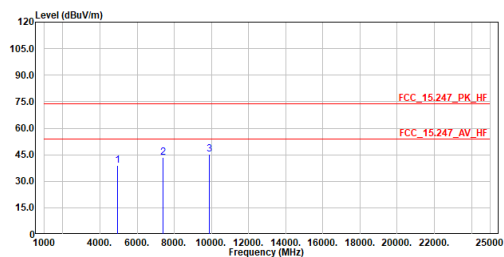


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4934.000	39.14	74.00	-34.86	56.60	-17.46	Peak
2	7401.000	43.57	74.00	-30.43	56.08	-12.51	Peak
3	9868.000	45.25	74.00	-28.75	54.08	-8.83	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :b_TX_2472MHz
Test By :Cyril Chen

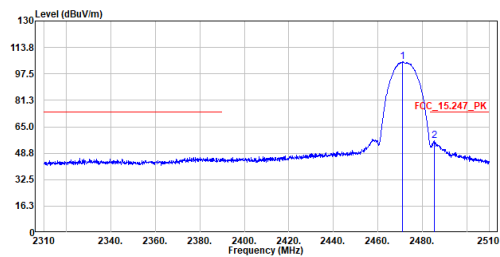


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2471.200	104.95	-----	-----	94.34	10.61	Peak
2	2485.200	56.28	74.00	-17.72	45.63	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 1
Mode :b_TX_2472MHz
Test By :Cyril Chen

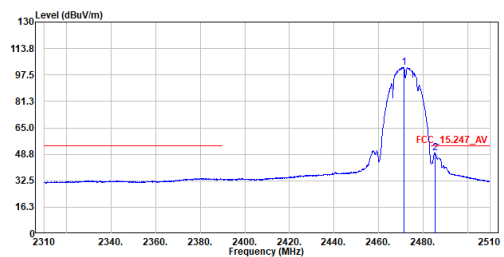


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2471.300	102.22	-----	-----	91.61	10.61	Average
2	2485.200	49.76	54.00	-4.24	39.11	10.65	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :b_TX_2472MHz
Test By :Cyril Chen

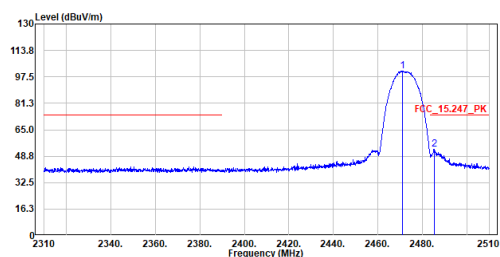


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2471.200	101.13	-----	-----	90.52	10.61	Peak
2	2485.500	52.86	74.00	-21.14	42.21	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 1
Mode :b_TX_2472MHz
Test By :Cyril Chen

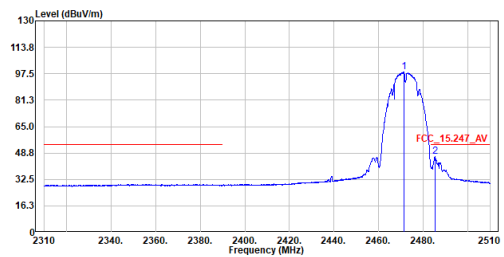


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2471.300	98.49	-----	-----	87.88	10.61	Average
2	2485.200	46.42	54.00	-7.58	35.77	10.65	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :b_TX_2472MHz
Test By :Cyril Chen

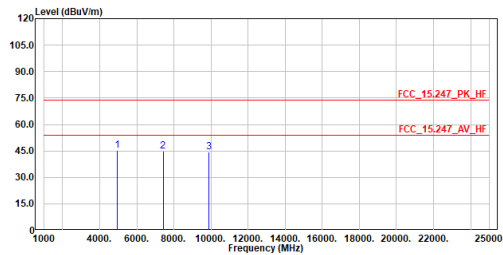


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4944.000	45.25	74.00	-28.75	62.69	-17.44	Peak
2	7416.000	44.74	74.00	-29.26	57.21	-12.47	Peak
3	9888.000	44.33	74.00	-29.67	53.13	-8.80	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :b_TX_2472MHz
Test By :Cyril Chen

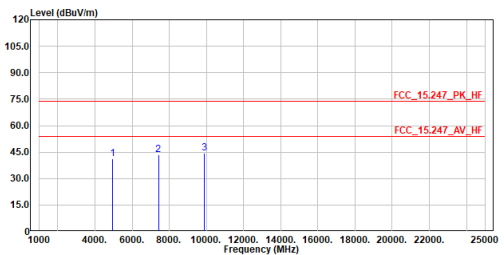


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4944.000	41.20	74.00	-32.80	58.64	-17.44	Peak
2	7416.000	43.48	74.00	-30.52	55.95	-12.47	Peak
3	9888.000	44.57	74.00	-29.43	53.37	-8.80	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :g_TX_2412MHz
Test By :Cyril Chen

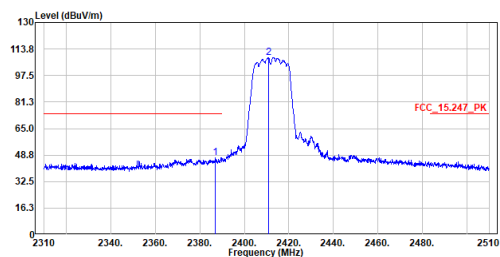


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2387.000	47.27	74.00	-26.73	36.87	10.40	Peak
2	2410.000	108.54	-----	-----	98.07	10.47	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 20
Mode :g_TX_2412MHz
Test By :Cyril Chen

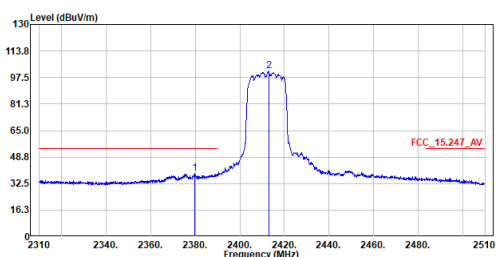


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2379.900	38.82	54.00	-15.18	28.44	10.38	Average
2	2412.900	101.33	-----	-----	90.86	10.47	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :g_TX_2412MHz
Test By :Cyril Chen

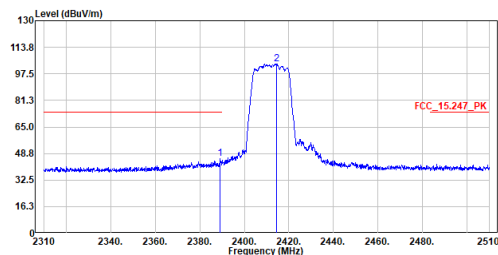


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.200	45.44	74.00	-28.56	35.04	10.40	Peak
2	2414.400	103.64	-----	-----	93.17	10.47	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 20
Mode :g_TX_2412MHz
Test By :Cyril Chen

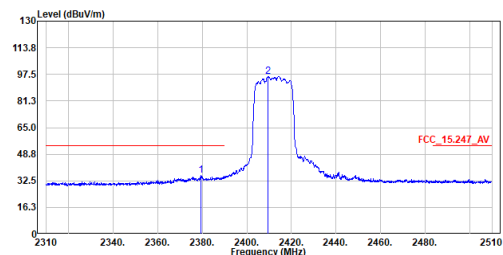


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2379.300	35.70	54.00	-18.30	25.32	10.38	Average
2	2409.600	96.23	-----	-----	85.77	10.46	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :g_TX_2412MHz
Test By :Cyril Chen

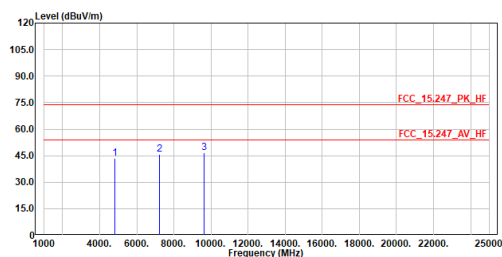


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4824.000	43.54	74.00	-30.46	61.30	-17.76	Peak
2	7236.000	45.86	74.00	-28.14	58.64	-12.78	Peak
3	9648.000	46.77	74.00	-27.23	55.86	-9.09	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :g_TX_2412MHz
Test By :Cyril Chen

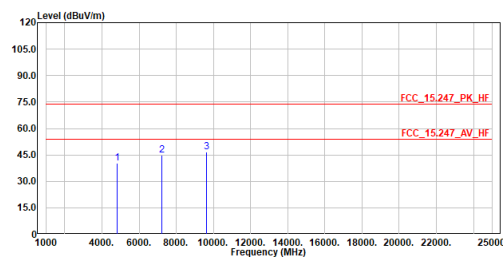


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4824.000	40.38	74.00	-33.62	58.14	-17.76	Peak
2	7236.000	45.00	74.00	-29.00	57.78	-12.78	Peak
3	9648.000	46.79	74.00	-27.21	55.88	-9.09	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :g_TX_2437MHz
Test By :Cyril Chen

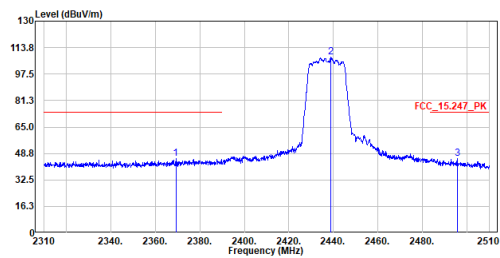


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2369.200	45.65	74.00	-28.35	35.29	10.36	Peak
2	2438.800	107.72	-----	-----	97.20	10.52	Peak
3	2495.600	45.47	74.00	-28.53	34.80	10.67	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 20
Mode :g_TX_2437MHz
Test By :Cyril Chen

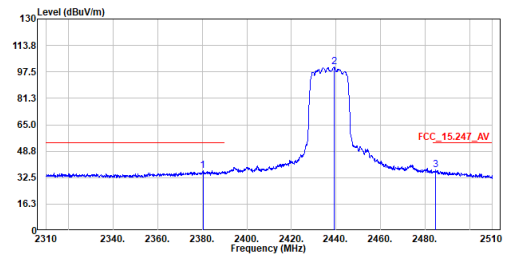


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2380.300	36.57	54.00	-17.43	26.19	10.38	Average
2	2439.200	100.58	-----	-----	90.06	10.52	Average
3	2484.600	37.06	54.00	-16.94	26.41	10.65	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :g_TX_2437MHz
Test By :Cyril Chen

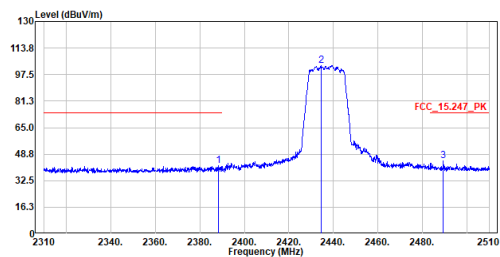


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2388.200	41.88	74.00	-32.12	31.48	10.40	Peak
2	2434.500	103.06	-----	-----	92.54	10.52	Peak
3	2489.300	44.59	74.00	-29.41	33.93	10.66	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 20
Mode :g_TX_2437MHz
Test By :Cyril Chen

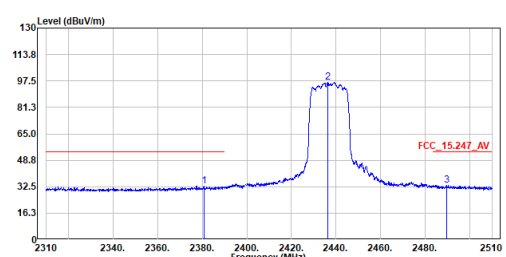


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2380.700	33.00	54.00	-21.00	22.62	10.38	Average
2	2436.300	96.51	-----	-----	85.99	10.52	Average
3	2489.600	33.54	54.00	-20.46	22.88	10.66	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :g_TX_2437MHz
Test By :Cyril Chen

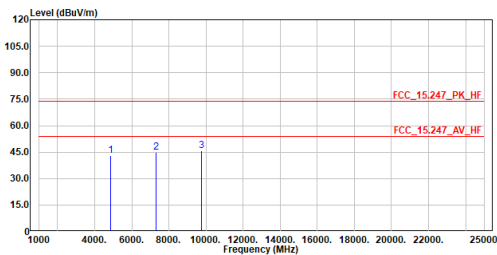


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4874.000	43.05	74.00	-30.95	60.67	-17.62	Peak
2	7311.000	44.67	74.00	-29.33	57.33	-12.66	Peak
3	9748.000	45.93	74.00	-28.07	54.91	-8.98	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :g_TX_2437MHz
Test By :Cyril Chen

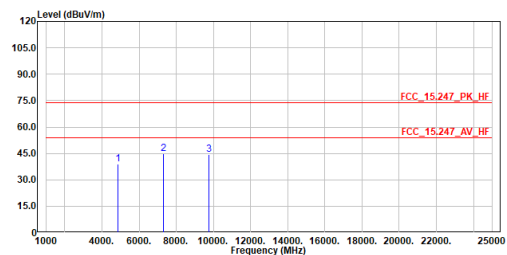


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4874.000	38.95	74.00	-35.05	56.57	-17.62	Peak
2	7311.000	44.86	74.00	-29.14	57.52	-12.66	Peak
3	9748.000	44.47	74.00	-29.53	53.45	-8.98	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :g_TX_2462MHz
Test By :Cyril Chen

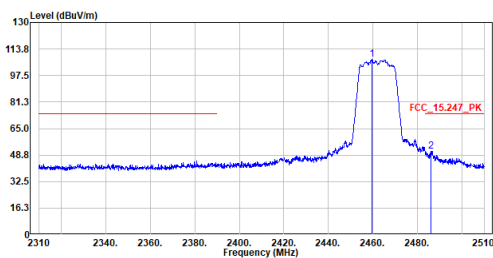


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2459.500	107.22	-----	-----	96.65	10.57	Peak
2	2486.100	50.94	74.00	-23.06	40.29	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 20
Mode :g_TX_2462MHz
Test By :Cyril Chen

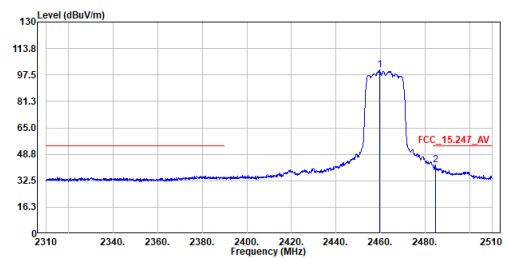


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2459.500	100.42	-----	-----	89.85	10.57	Average
2	2484.500	42.07	54.00	-11.93	31.42	10.65	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :g_TX_2462MHz
Test By :Cyril Chen

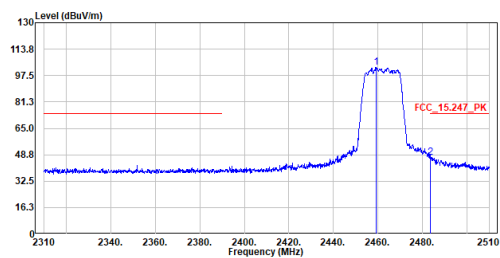


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2459.100	102.56	74.00	28.56	91.99	10.57	Peak
2	2483.600	46.97	74.00	-27.03	36.33	10.64	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 20
Mode :g_TX_2462MHz
Test By :Cyril Chen

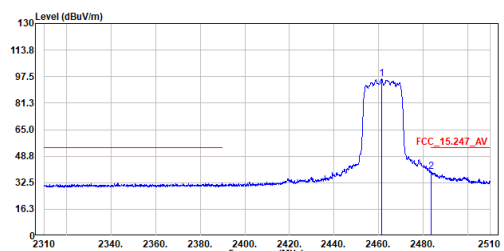


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2461.300	96.02	74.00	22.02	85.44	10.58	Average
2	2483.600	39.03	74.00	-34.97	28.39	10.64	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :g_TX_2462MHz
Test By :Cyril Chen

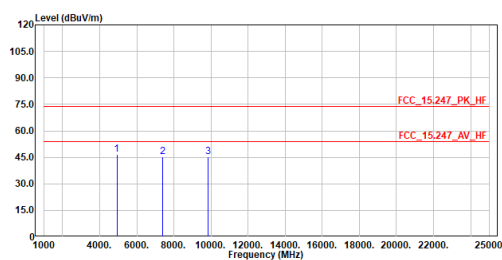


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4924.000	46.80	74.00	-27.20	64.29	-17.49	Peak
2	7386.000	45.28	74.00	-28.72	57.81	-12.53	Peak
3	9848.000	45.41	74.00	-28.59	54.26	-8.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :g_TX_2462MHz
Test By :Cyril Chen

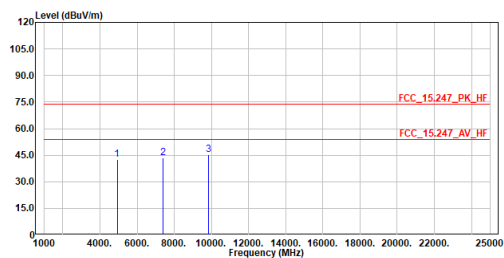


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4924.000	42.45	74.00	-31.55	59.94	-17.49	Peak
2	7386.000	43.67	74.00	-30.33	56.20	-12.53	Peak
3	9848.000	45.32	74.00	-28.68	54.17	-8.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :g_TX_2467MHz
Test By :Cyril Chen

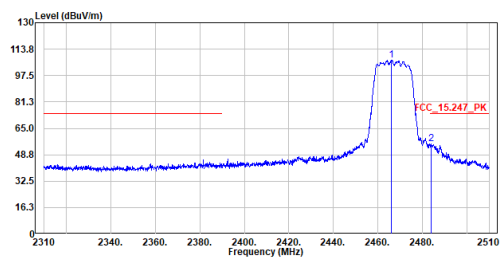


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2466.200	107.16	-----	-----	95.56	10.60	Peak
2	2483.800	55.26	74.00	-18.74	44.61	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 20
Mode :g_TX_2467MHz
Test By :Cyril Chen

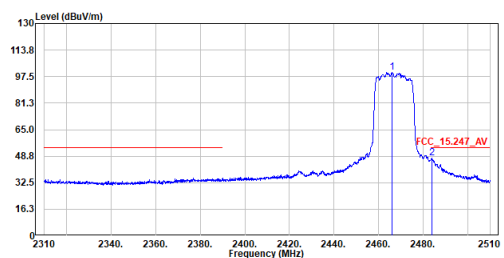


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2466.000	100.01	-----	-----	89.41	10.60	Average
2	2483.900	47.48	54.00	-6.52	36.83	10.65	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :g_TX_2467MHz
Test By :Cyril Chen

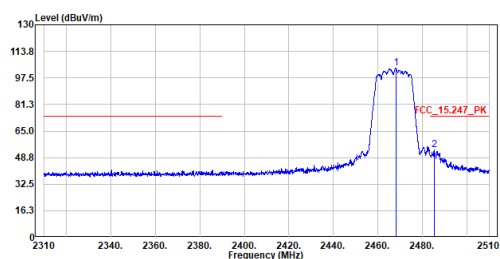


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2466.100	103.50	-----	-----	92.89	10.61	Peak
2	2485.500	53.29	74.00	-20.71	42.64	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 20
Mode :g_TX_2467MHz
Test By :Cyril Chen

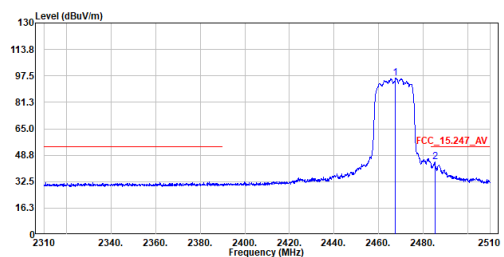


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2467.600	96.16	-----	-----	85.56	10.60	Average
2	2485.200	44.61	54.00	-9.39	33.96	10.65	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :g_TX_2467MHz
Test By :Cyril Chen

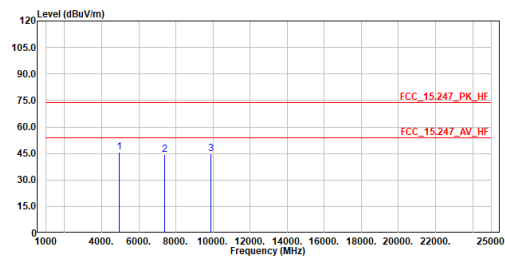


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4934.000	45.92	74.00	-28.08	63.38	-17.46	Peak
2	7401.000	44.44	74.00	-29.56	56.95	-12.51	Peak
3	9868.000	44.83	74.00	-29.17	53.66	-8.83	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :g_TX_2467MHz
Test By :Cyril Chen

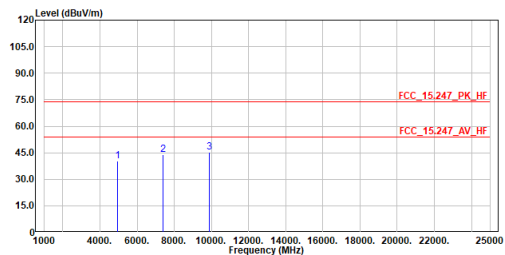


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4934.000	40.46	74.00	-33.54	57.92	-17.46	Peak
2	7401.000	43.90	74.00	-30.10	56.41	-12.51	Peak
3	9868.000	45.14	74.00	-28.86	53.97	-8.83	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :g_TX_2472MHz
Test By :Cyril Chen

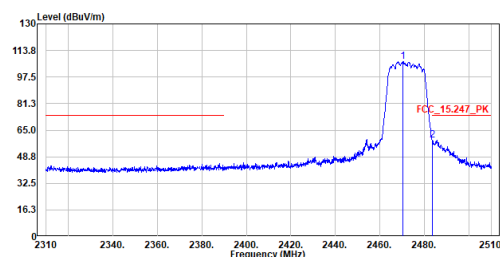


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2470.400	106.92	-----	-----	96.31	10.61	Peak
2	2483.600	58.94	74.00	-15.06	48.30	10.64	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 20
Mode :g_TX_2472MHz
Test By :Cyril Chen

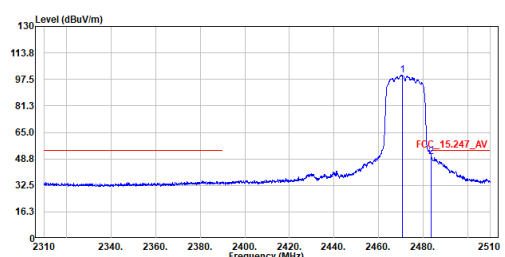


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2470.700	100.01	-----	-----	89.40	10.61	Average
2	2483.600	49.83	54.00	-4.17	39.19	10.64	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :g_TX_2472MHz
Test By :Cyril Chen

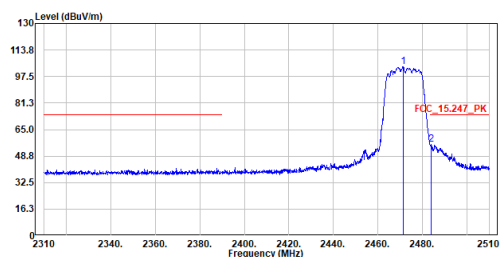


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	2471.300	103.36	-----	-----	92.75	10.61	Peak
2	2483.900	55.71	74.00	-18.29	45.06	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 20
Mode :g_TX_2472MHz
Test By :Cyril Chen

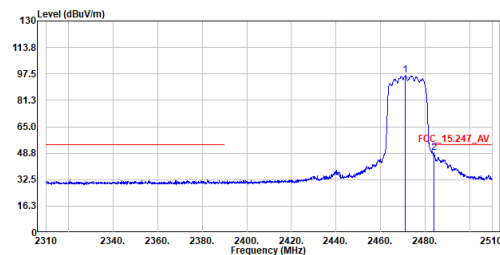


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	2471.100	96.88	-----	-----	86.27	10.61	Average
2	2483.900	48.94	54.00	-5.06	38.29	10.65	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :g_TX_2472MHz
Test By :Cyril Chen

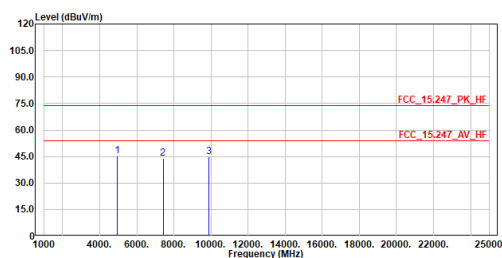


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	4944.000	45.50	74.00	-28.50	62.94	-17.44	Peak
2	7416.000	43.79	74.00	-30.21	56.26	-12.47	Peak
3	9888.000	45.01	74.00	-28.99	53.81	-8.80	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :g_TX_2472MHz
Test By :Cyril Chen

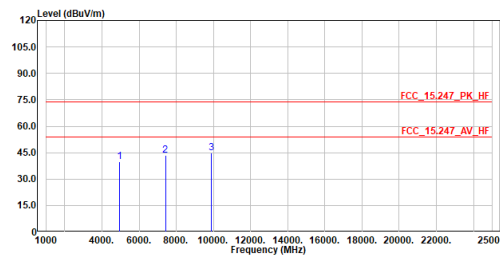


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	4944.000	39.98	74.00	-34.02	57.42	-17.44	Peak
2	7416.000	43.56	74.00	-30.44	56.03	-12.47	Peak
3	9888.000	44.93	74.00	-29.07	53.73	-8.80	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :be20_TX_2412MHz
Test By :Cyril Chen

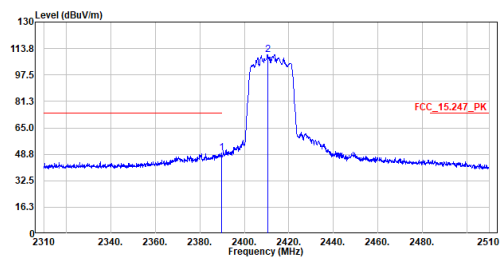


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.800	49.55	74.00	-24.45	39.14	10.41	Peak
2	2410.400	109.85	-----	-----	99.39	10.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3
Mode :be20_TX_2412MHz
Test By :Cyril Chen

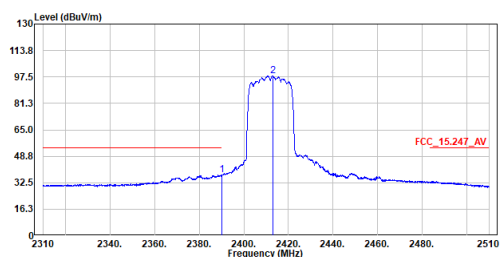


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2390.000	37.43	54.00	-16.57	27.02	10.41	Average
2	2412.900	98.12	-----	-----	87.65	10.47	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :be20_TX_2412MHz
Test By :Cyril Chen

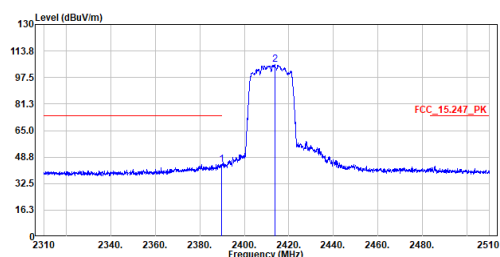


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.800	44.39	74.00	-29.61	33.98	10.41	Peak
2	2413.700	105.48	-----	-----	95.01	10.47	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3
Mode :be20_TX_2412MHz
Test By :Cyril Chen

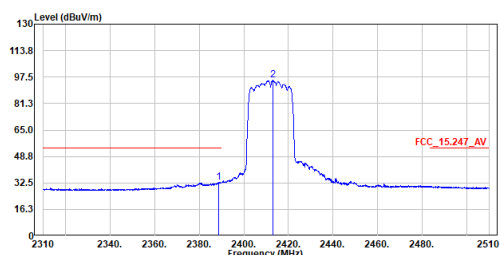


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2388.800	32.69	54.00	-21.31	22.29	10.40	Average
2	2412.900	95.50	-----	-----	85.03	10.47	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be20_TX_2412MHz
Test By :Cyril Chen

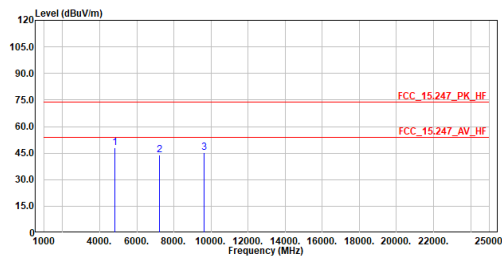


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4824.000	48.04	74.00	-25.96	65.80	-17.76	Peak
2	7236.000	44.14	74.00	-29.86	56.92	-12.78	Peak
3	9648.000	45.31	74.00	-28.69	54.40	-9.09	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be20_TX_2412MHz
Test By :Cyril Chen

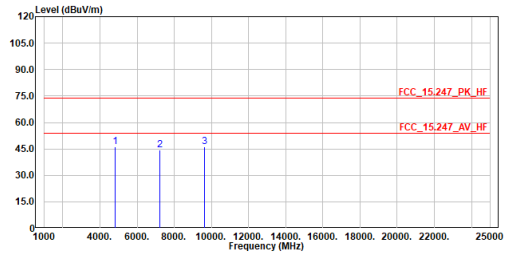


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4824.000	46.00	74.00	-28.00	63.76	-17.76	Peak
2	7236.000	44.40	74.00	-29.60	57.18	-12.78	Peak
3	9648.000	46.30	74.00	-27.70	55.39	-9.09	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :be20_TX_2437MHz
Test By :Cyril Chen

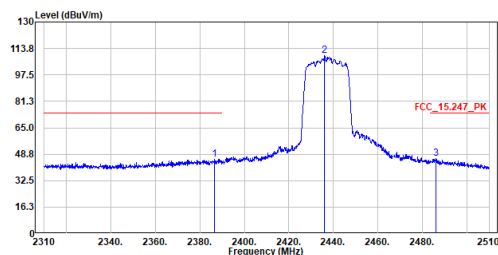


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2386.600	45.85	74.00	-28.15	35.45	10.40	Peak
2	2436.100	109.19	-----	-----	98.67	10.52	Peak
3	2486.100	46.35	74.00	-27.65	35.70	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3
Mode :be20_TX_2437MHz
Test By :Cyril Chen

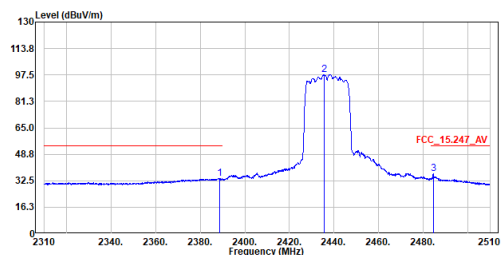


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2388.700	34.01	54.00	-19.99	23.61	10.40	Average
2	2435.600	97.84	-----	-----	87.32	10.52	Average
3	2484.500	36.81	54.00	-17.19	26.16	10.65	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :be20_TX_2437MHz
Test By :Cyril Chen

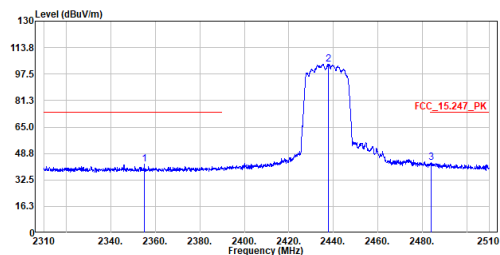


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2355.000	42.20	74.00	-31.80	31.87	10.33	Peak
2	2437.900	103.72	-----	-----	93.20	10.52	Peak
3	2483.900	43.15	74.00	-30.85	32.50	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3
Mode :be20_TX_2437MHz
Test By :Cyril Chen

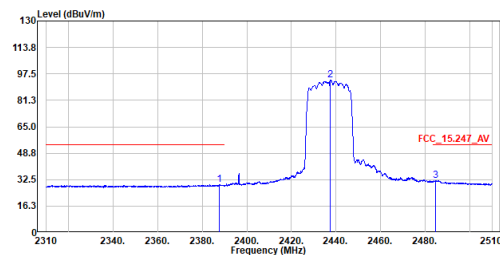


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2387.500	29.47	54.00	-24.53	19.07	10.40	Average
2	2437.500	93.71	-----	-----	83.19	10.52	Average
3	2484.600	32.10	54.00	-21.90	21.45	10.65	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be20_TX_2437MHz
Test By :Cyril Chen

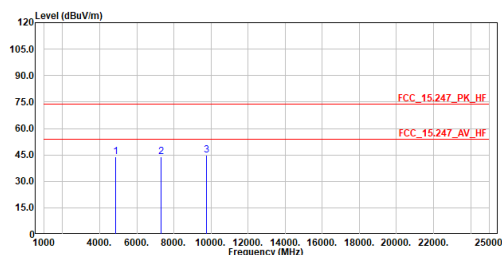


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4874.000	43.80	74.00	-30.20	61.42	-17.62	Peak
2	7311.000	44.08	74.00	-29.92	56.74	-12.66	Peak
3	9748.000	44.68	74.00	-29.32	53.66	-8.98	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be20_TX_2437MHz
Test By :Cyril Chen

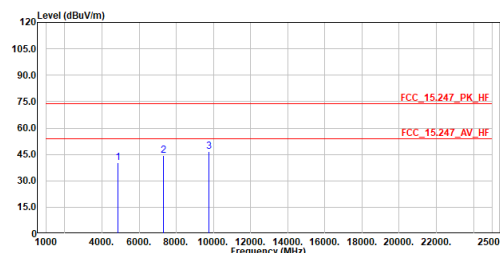


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4874.000	40.09	74.00	-33.91	57.71	-17.62	Peak
2	7311.000	44.32	74.00	-29.68	56.98	-12.66	Peak
3	9748.000	46.77	74.00	-27.23	55.75	-8.98	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :be20_TX_2462MHz
Test By :Cyril Chen

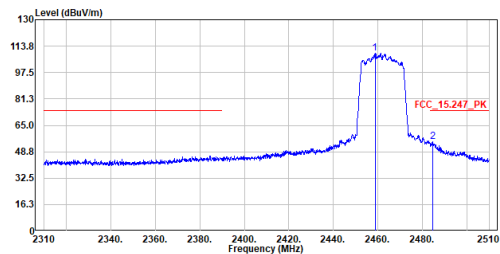


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	2458.700	109.35	-----	-----	98.78	10.57	Peak
2	2484.800	54.98	74.00	-19.02	44.33	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3
Mode :be20_TX_2462MHz
Test By :Cyril Chen

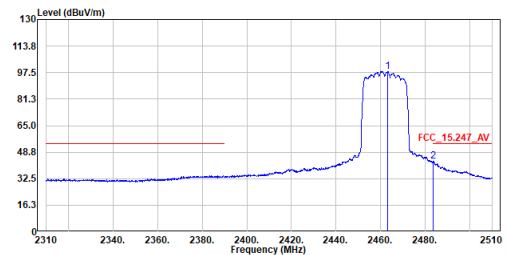


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	2463.100	98.27	-----	-----	87.68	10.59	Average
2	2483.700	43.03	54.00	-10.97	32.38	10.65	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :be20_TX_2462MHz
Test By :Cyril Chen

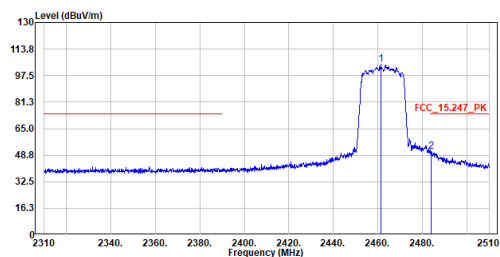


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	2461.300	104.26	-----	-----	93.68	10.58	Peak
2	2483.900	51.24	74.00	-22.76	40.59	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3
Mode :be20_TX_2462MHz
Test By :Cyril Chen

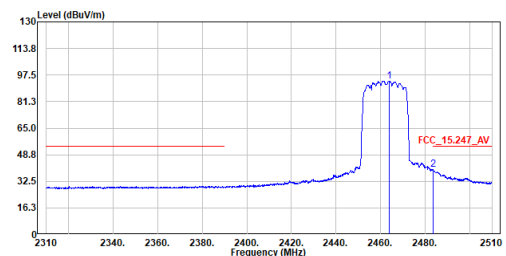


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	2463.800	93.94	-----	-----	83.35	10.59	Average
2	2483.600	39.77	54.00	-14.23	29.13	10.64	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be20_TX_2462MHz
Test By :Cyril Chen

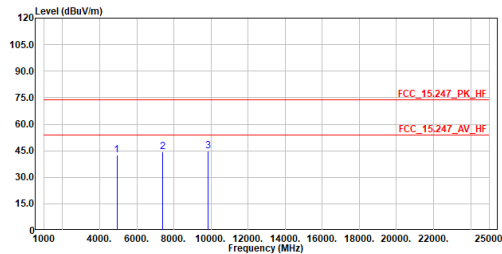


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4924.000	42.47	74.00	-31.53	59.96	-17.49	Peak
2	7386.000	44.49	74.00	-29.51	57.02	-12.53	Peak
3	9848.000	45.02	74.00	-28.98	53.87	-8.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be20_TX_2462MHz
Test By :Cyril Chen

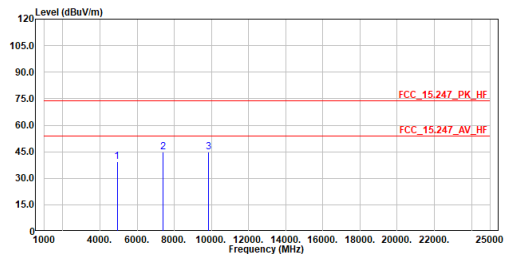


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4924.000	39.59	74.00	-34.41	57.08	-17.49	Peak
2	7386.000	44.79	74.00	-29.21	57.32	-12.53	Peak
3	9848.000	44.78	74.00	-29.22	53.63	-8.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :be20_TX_2467MHz
Test By :Cyril Chen

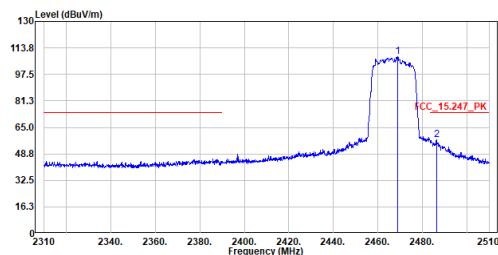


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2469.000	108.31	-----	-----	97.70	10.61	Peak
2	2486.300	57.21	74.00	-16.79	46.56	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3
Mode :be20_TX_2467MHz
Test By :Cyril Chen

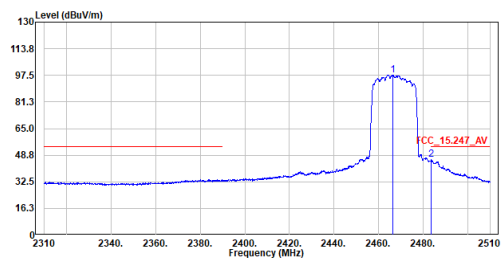


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2466.500	97.83	-----	-----	87.23	10.60	Average
2	2483.600	45.88	54.00	-8.12	35.24	10.64	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :be20_TX_2467MHz
Test By :Cyril Chen

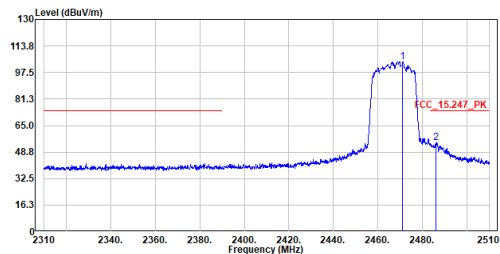


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2471.200	104.21	-----	-----	93.60	10.61	Peak
2	2486.200	54.46	74.00	-19.54	43.81	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3
Mode :be20_TX_2467MHz
Test By :Cyril Chen

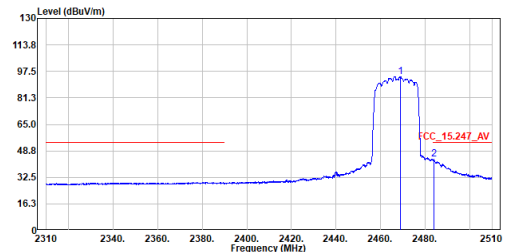


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2468.900	94.42	-----	-----	83.81	10.61	Average
2	2483.800	43.42	54.00	-10.58	32.77	10.65	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be20_TX_2467MHz
Test By :Cyril Chen

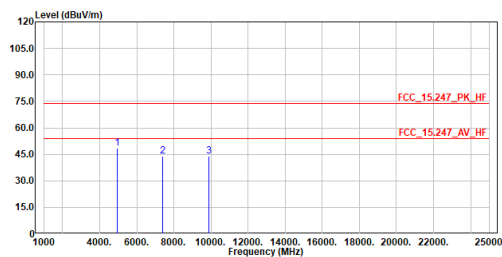


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4934.000	48.60	74.00	-25.40	66.06	-17.46	Peak
2	7401.000	43.97	74.00	-30.03	56.48	-12.51	Peak
3	9868.000	44.13	74.00	-29.87	52.96	-8.83	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be20_TX_2467MHz
Test By :Cyril Chen

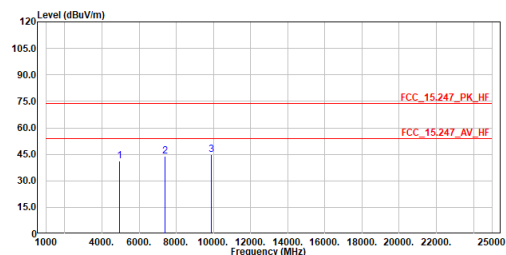


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4934.000	41.20	74.00	-32.80	58.66	-17.46	Peak
2	7401.000	43.81	74.00	-30.19	56.32	-12.51	Peak
3	9868.000	44.65	74.00	-29.35	53.48	-8.83	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :be20_TX_2472MHz
Test By :Cyril Chen

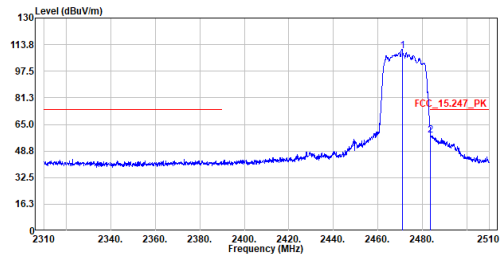


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2470.900	109.71	-----	-----	99.10	10.61	Peak
2	2483.700	58.38	74.00	-15.62	47.73	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3
Mode :be20_TX_2472MHz
Test By :Cyril Chen

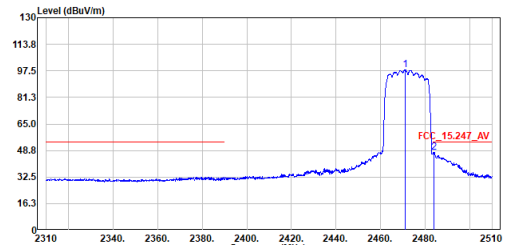


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2471.200	98.25	-----	-----	87.64	10.61	Average
2	2484.100	47.65	54.00	-6.35	37.00	10.65	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :be20_TX_2472MHz
Test By :Cyril Chen

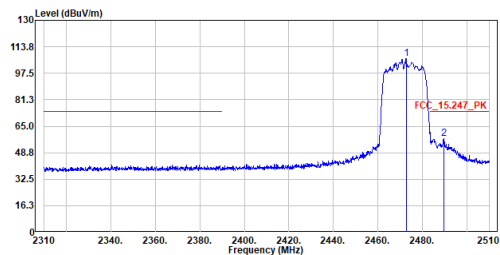


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2472.800	106.43	-----	-----	95.82	10.61	Peak
2	2489.700	57.38	74.00	-16.62	46.72	10.66	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3
Mode :be20_TX_2472MHz
Test By :Cyril Chen

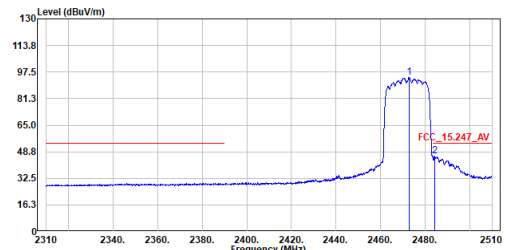


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2472.700	94.17	-----	-----	83.56	10.61	Average
2	2484.200	45.94	54.00	-8.06	35.29	10.65	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be20_TX_2472MHz
Test By :Cyril Chen

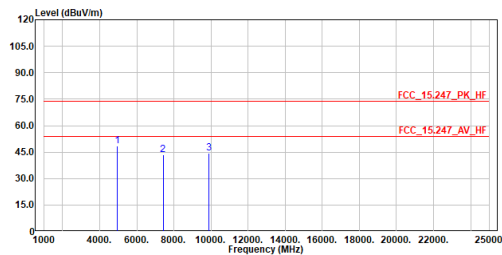


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4944.000	48.67	74.00	-25.33	66.11	-17.44	Peak
2	7416.000	43.40	74.00	-30.60	55.87	-12.47	Peak
3	9888.000	44.58	74.00	-29.42	53.38	-8.80	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be20_TX_2472MHz
Test By :Cyril Chen

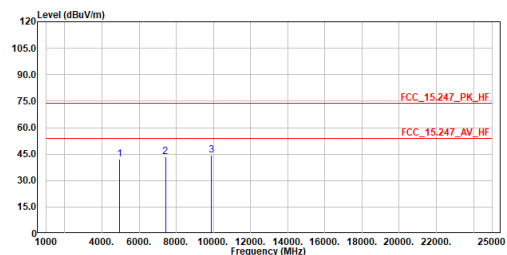


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4944.000	41.93	74.00	-32.07	59.37	-17.44	Peak
2	7416.000	43.50	74.00	-30.50	55.97	-12.47	Peak
3	9888.000	44.16	74.00	-29.84	52.96	-8.80	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :be40_TX_2422MHz
Test By :Cyril Chen

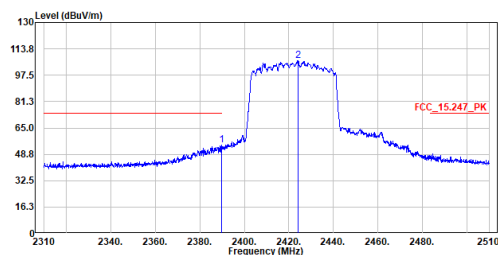


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.700	54.22	74.00	-19.78	43.81	10.41	Peak
2	2424.000	106.44	-----	-----	95.95	10.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3
Mode :be40_TX_2422MHz
Test By :Cyril Chen

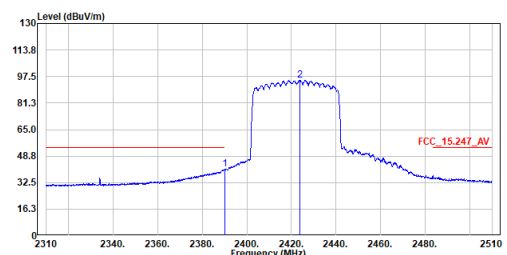


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2390.000	40.73	54.00	-13.27	30.32	10.41	Average
2	2423.900	95.34	-----	-----	84.85	10.49	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :be40_TX_2422MHz
Test By :Cyril Chen

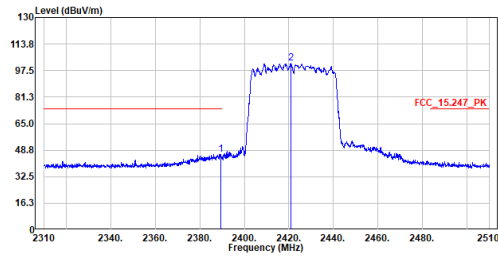


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.400	46.23	74.00	-27.77	35.82	10.41	Peak
2	2421.000	101.86	74.00	27.86	91.37	10.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3
Mode :be40_TX_2422MHz
Test By :Cyril Chen

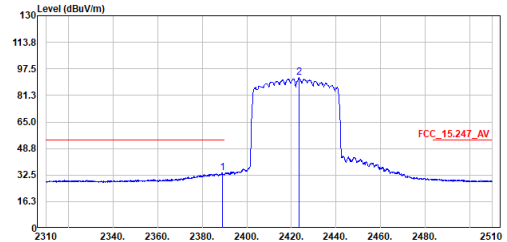


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2388.900	33.89	74.00	-40.11	23.49	10.40	Average
2	2423.300	92.02	74.00	18.02	81.53	10.49	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be40_TX_2422MHz
Test By :Cyril Chen

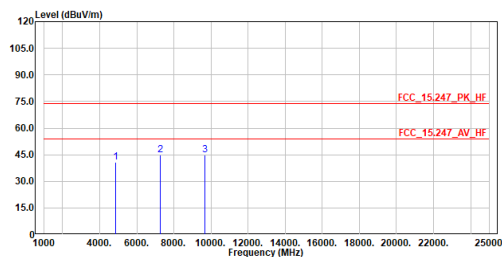


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4844.000	40.90	74.00	-33.10	58.60	-17.70	Peak
2	7266.000	44.73	74.00	-29.27	57.46	-12.73	Peak
3	9688.000	44.99	74.00	-29.01	54.04	-9.05	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be40_TX_2422MHz
Test By :Cyril Chen

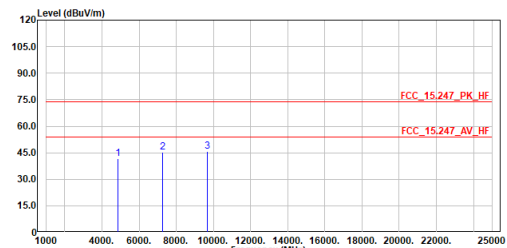


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4844.000	41.51	74.00	-32.49	59.21	-17.70	Peak
2	7266.000	45.40	74.00	-28.60	58.13	-12.73	Peak
3	9688.000	45.54	74.00	-28.46	54.59	-9.05	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :be40_TX_2437MHz
Test By :Cyril Chen

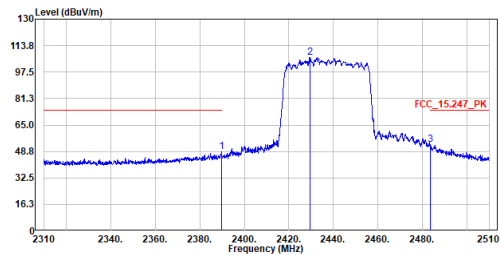


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.700	48.38	74.00	-25.62	37.97	10.41	Peak
2	2429.400	106.58	-----	-----	96.07	10.51	Peak
3	2483.700	53.20	74.00	-20.80	42.55	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3
Mode :be40_TX_2437MHz
Test By :Cyril Chen

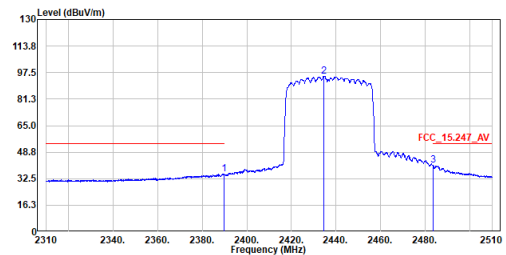


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.900	35.53	54.00	-18.47	25.12	10.41	Average
2	2434.600	95.38	-----	-----	84.86	10.52	Average
3	2483.600	40.54	54.00	-13.46	29.90	10.64	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :be40_TX_2437MHz
Test By :Cyril Chen

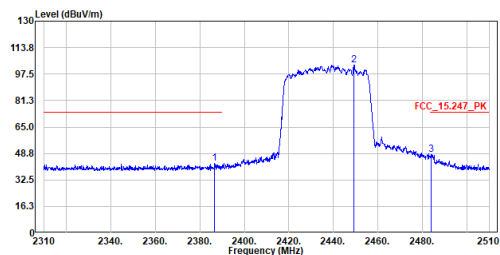


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2386.700	42.44	74.00	-31.56	32.04	10.40	Peak
2	2449.200	103.13	-----	-----	92.58	10.55	Peak
3	2484.100	48.10	74.00	-25.90	37.45	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3
Mode :be40_TX_2437MHz
Test By :Cyril Chen

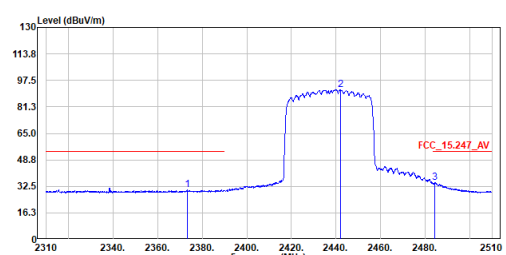


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2373.400	30.31	54.00	-23.69	19.95	10.36	Average
2	2442.000	91.85	-----	-----	81.31	10.54	Average
3	2484.400	34.81	54.00	-19.19	24.16	10.65	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be40_TX_2437MHz
Test By :Cyril Chen

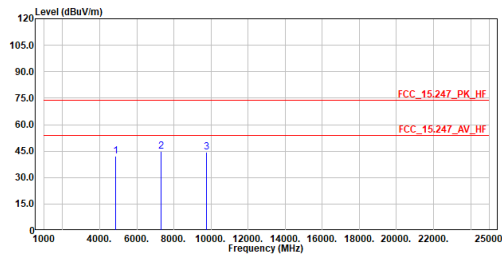


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4874.000	42.83	74.00	-31.97	59.65	-17.62	Peak
2	7311.000	44.88	74.00	-29.12	57.54	-12.66	Peak
3	9748.000	44.42	74.00	-29.58	53.40	-8.98	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be40_TX_2437MHz
Test By :Cyril Chen

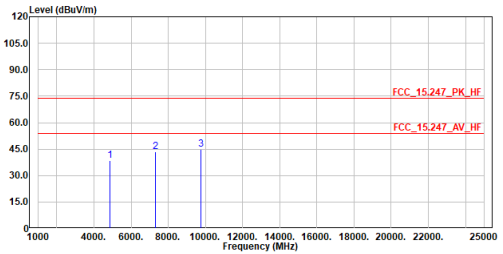


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4874.000	38.48	74.00	-35.52	56.10	-17.62	Peak
2	7311.000	43.58	74.00	-30.42	56.24	-12.66	Peak
3	9748.000	44.87	74.00	-29.13	53.85	-8.98	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :be40_TX_2452MHz
Test By :Cyril Chen

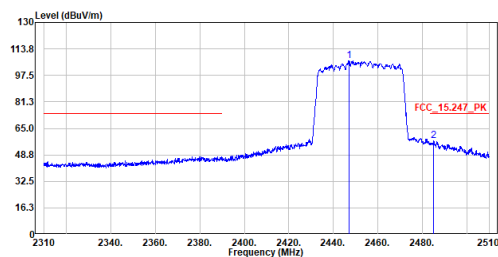


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2447.000	106.69	-----	-----	96.14	10.55	Peak
2	2485.100	57.23	74.00	-16.77	46.58	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3
Mode :be40_TX_2452MHz
Test By :Cyril Chen

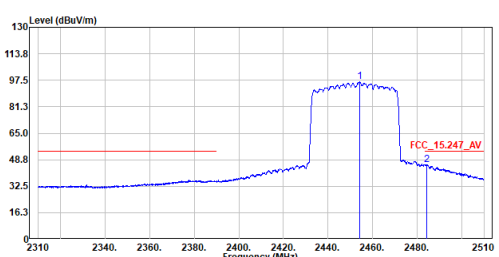


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2454.200	96.53	-----	-----	85.96	10.57	Average
2	2484.400	45.81	54.00	-8.19	35.16	10.65	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1800 / 3000
Mode :be40_TX_2452MHz
Test By :Cyril Chen

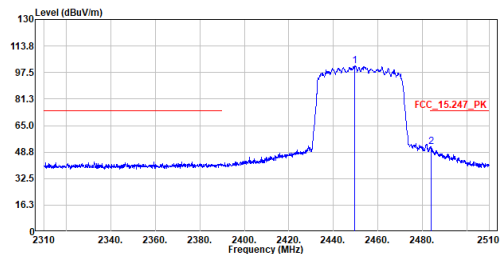


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2449.500	101.48	-----	-----	90.93	10.55	Peak
2	2483.800	52.12	74.00	-21.88	41.47	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1800 / 3
Mode :be40_TX_2452MHz
Test By :Cyril Chen

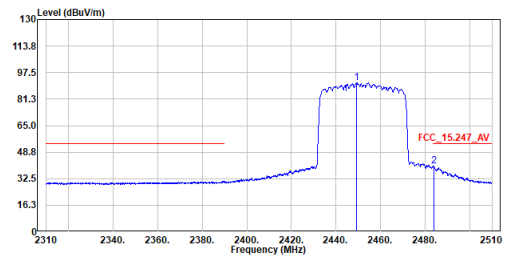


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2449.200	91.18	-----	-----	80.63	10.55	Average
2	2483.900	40.21	54.00	-13.79	29.56	10.65	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be40_TX_2452MHz
Test By :Cyril Chen

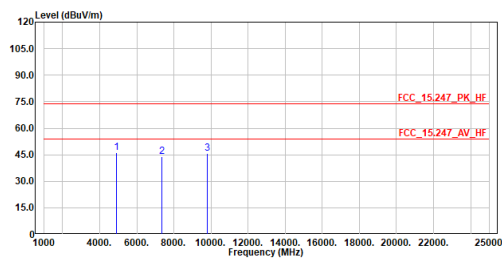


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4904.000	46.11	74.00	-27.89	63.65	-17.54	Peak
2	7356.000	44.11	74.00	-29.89	56.68	-12.57	Peak
3	9808.000	45.59	74.00	-28.41	54.49	-8.90	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be40_TX_2452MHz
Test By :Cyril Chen

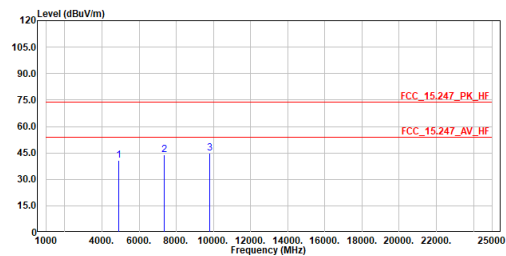


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4904.000	40.59	74.00	-33.41	58.13	-17.54	Peak
2	7356.000	43.75	74.00	-30.25	56.32	-12.57	Peak
3	9808.000	44.83	74.00	-29.17	53.73	-8.90	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :be40_TX_2457MHz
Test By :Cyril Chen

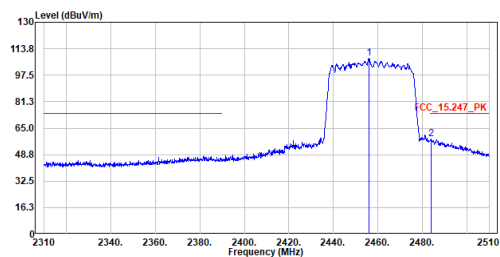


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2456.000	107.82	-----	-----	97.25	10.57	Peak
2	2484.100	58.31	74.00	-15.69	47.66	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3
Mode :be40_TX_2457MHz
Test By :Cyril Chen

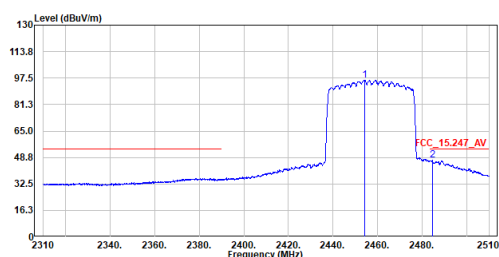


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2454.300	96.25	-----	-----	85.68	10.57	Average
2	2484.500	46.87	54.00	-7.13	36.22	10.65	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :be40_TX_2457MHz
Test By :Cyril Chen

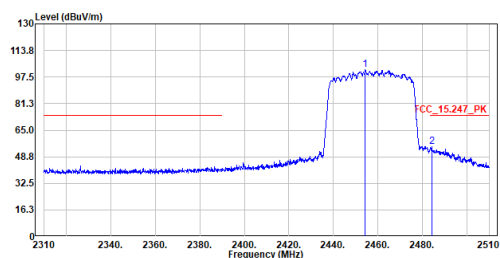


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2454.300	102.12	-----	-----	91.55	10.57	Peak
2	2484.200	54.97	74.00	-19.03	44.32	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3
Mode :be40_TX_2457MHz
Test By :Cyril Chen

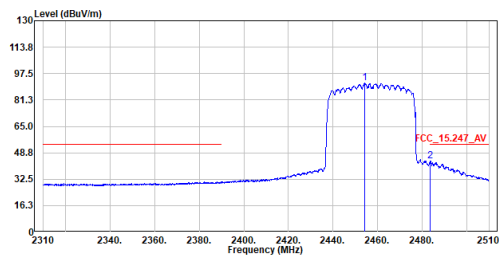


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2454.200	91.57	-----	-----	81.00	10.57	Average
2	2483.700	43.63	54.00	-10.37	32.98	10.65	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be40_TX_2457MHz
Test By :Cyril Chen

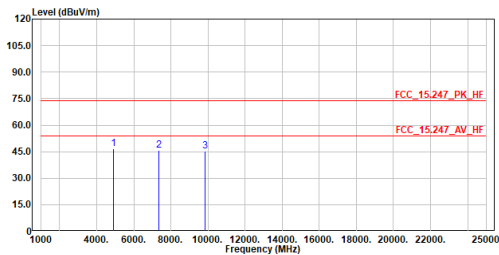


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4914.000	46.47	74.00	-27.53	64.00	-17.53	Peak
2	7371.000	45.65	74.00	-28.35	58.21	-12.56	Peak
3	9828.000	45.22	74.00	-28.78	54.10	-8.88	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be40_TX_2457MHz
Test By :Cyril Chen

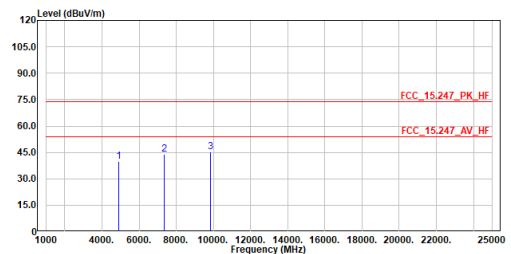


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4914.000	40.04	74.00	-33.96	57.57	-17.53	Peak
2	7371.000	44.02	74.00	-29.98	56.58	-12.56	Peak
3	9828.000	45.48	74.00	-28.52	54.36	-8.88	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :ac40_TX_2462MHz
Test By :Cyril Chen

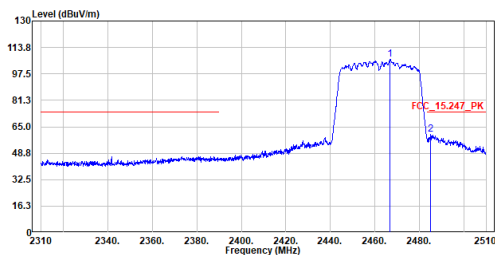


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2466.900	106.42	74.00	32.42	95.82	10.60	Peak
2	2485.100	60.24	74.00	-13.76	49.59	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 10
Mode :ac40_TX_2462MHz
Test By :Cyril Chen

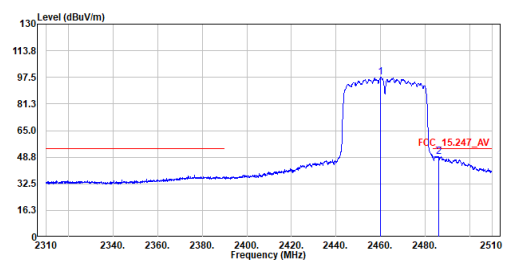


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2460.100	97.62	74.00	23.62	87.05	10.57	Average
2	2486.000	49.21	74.00	-24.79	38.56	10.65	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :ac40_TX_2462MHz
Test By :Cyril Chen

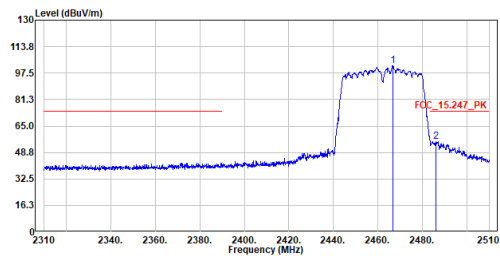


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2466.700	102.14	-----	-----	91.54	10.60	Peak
2	2486.200	55.56	74.00	-18.44	44.91	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 10
Mode :ac40_TX_2462MHz
Test By :Cyril Chen

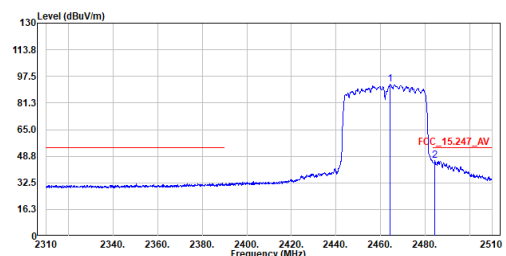


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2464.400	92.51	-----	-----	81.91	10.60	Average
2	2484.300	46.01	54.00	-7.99	35.36	10.65	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be40_TX_2462MHz
Test By :Cyril Chen

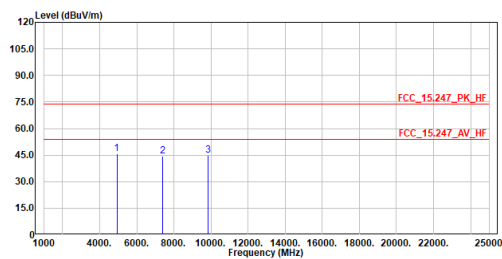


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4924.000	45.61	74.00	-28.39	63.10	-17.49	Peak
2	7386.000	44.30	74.00	-29.70	56.83	-12.53	Peak
3	9848.000	44.71	74.00	-29.29	53.56	-8.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be40_TX_2462MHz
Test By :Cyril Chen

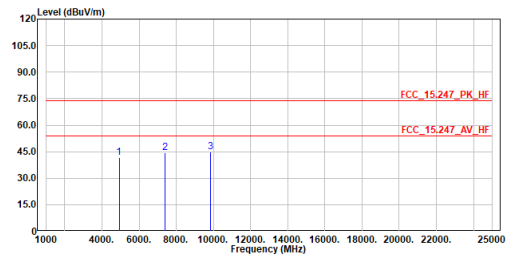

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4924.000	41.70	74.00	-32.30	59.19	-17.49	Peak
2	7386.000	44.37	74.00	-29.63	56.90	-12.53	Peak
3	9848.000	44.99	74.00	-29.01	53.84	-8.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.