



Report No: FCC 1507166-02 File reference No: 2015-08-20

Applicant: Ocean Coast Resources(HongKong) Limited

Product: Smart Mobile phone

Model No: NOW QS5, A3 REVOLUTION

Trademark: AUDINAC, I-modo

Test Standards: FCC Part 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15 Subpart C,

Paragraph 15.247 regulations for the evaluation o

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: August 20, 2015

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Room 512-519, 5/F., East Tower, Building 4, Anhua Industrial Zone, Futian District, Shenzhen, Guangdong, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timewaytech.com

Report No: FCC1507166-02 Page 2 of 84

Date: 2015-08-20



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meets with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.:899988.

IC- Registration No.: IC5205A-02

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration No.: IC 5205A-02.

Date: 2015-08-20



Test Report Conclusion Content

| 1.0 | General Details | 4 |
|------|-------------------------------------|----|
| 1.1 | Test Lab Details. | 4 |
| 1.2 | Applicant Details | 4 |
| 1.3 | Description of EUT | 4 |
| 1.4 | Submitted Sample | 4 |
| 1.5 | Test Duration. | 5 |
| 1.6 | Test Uncertainty. | 5 |
| 1.7 | Test By | 5 |
| 2.0 | List of Measurement Equipment | 6 |
| 3.0 | Technical Details | 7 |
| 3.1 | Summary of Test Results. | 7 |
| 3.2 | Test Standards. | 7 |
| 4.0 | EUT Modification. | 7 |
| 5.0 | Power Line Conducted Emission Test. | 8 |
| 5.1 | Schematics of the Test. | 8 |
| 5.2 | Test Method and Test Procedure. | 8 |
| 5.3 | Configuration of the EUT. | 8 |
| 5.4 | EUT Operating Condition. | 9 |
| 5.5 | Conducted Emission Limit. | 9 |
| 5.6 | Test Result. | 9 |
| 6.0 | Radiated Emission test. | 12 |
| 6.1 | Test Method and Test Procedure. | 12 |
| 6.2 | Configuration of the EUT. | 12 |
| 6.3 | EUT Operation Condition. | 12 |
| 6.4 | Radiated Emission Limit. | 13 |
| 7.0 | 20dB Bandwidth | 22 |
| 8.0 | Maximum Output Power. | 34 |
| 9.0 | Carrier Frequency Separation. | 37 |
| 10.0 | Number of Hopping Channel | 41 |
| 11.0 | Time of Occupancy (Dwell Time) | 45 |
| 12.0 | Out of Band Measurement. | 58 |
| 13.0 | Antenna Requirement. | 71 |
| 14.0 | FCC ID/ IC Label. | 72 |
| 15.0 | Photo of Test Setup and EUT View. | 73 |

Date: 2015-08-20



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Room 512-519,5/F., East Tower, Building 4, Anhua Industrial Zone, Futian District, Shenzhen,

Guangdong China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m & 10 m OATS

1.2 Applicant Details

Applicant: Ocean Coast Resources(HongKong) Limited

Address: Room 1501, 15/F, SPA Centre, 53-55 Lockhart Road, Wanchai, Hong Kong

Telephone: 00852-31158812 Fax: 00852-31158801

1.3 Description of EUT

Product: Smart Mobile phone

Manufacturer: ShenZhen Jingwah-Kaoge Communication Technology Co., Ltd.

Address: Floor5th, Bldg 4, Jingwah Square, No.1, Huafa Road, Futian District,

Shenzhen, China

Brand Name: AUDINAC, I-modo

Model Number: NOW QS5
Additional Model Number: A3 REVOLUTION

Power Adapter Model No.: CH-S0500500W-B

Input: 100-240V, 50/60Hz, 0.1A; Output: DC5V, 500mA

Type of Modulation GFSK, 月/4DQPSK, 8DPSK for Bluetooth

Frequency range 2402-2480MHz for Bluetooth

Channel Spacing 1MHz for Bluetooth

Frequency Selection By software

Channel Number 79 channel for Bluetooth

Antenna: Integral Antenna and the maximum Gain of this antenna is 1.6dBi;

1.4 Submitted Sample: 2 Samples

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: FCC1507166-02 Page 5 of 84

Date: 2015-08-20



1.5 Test Duration 2015-07-29 to 2015-08-20

1.6 Test Uncertainty Conducted Emissions Uncertainty = 3.6dB Radiated Emissions Uncertainty =4.7dB

Test Engineer 1.7

The sample tested by

Print Name: Terry Tang

Page 6 of 84

Report No: FCC1507166-02

Date: 2015-08-20



| 2.0 Test Equipments | | | | | |
|------------------------|--------------|------------|-------------------|--------------|------------|
| Instrument Type | Manufacturer | Model | Serial No. | Date of Cal. | Due Date |
| ESPI Test Receiver | R&S | ESPI 3 | 100379 | 2014-08-21 | 2015-08-20 |
| TWO Line-V-NETW | R&S | EZH3-Z5 | 100294 | 2014-08-22 | 2015-08-21 |
| TWO Line-V-NETW | R&S | EZH3-Z5 | 100253 | 2014-08-22 | 2015-08-21 |
| Ultra Broadband ANT | R&S | HL562 | 100157 | 2014-08-23 | 2015-08-22 |
| ESDV Test Receiver | R&S | ESDV | 100008 | 2014-08-22 | 2015-08-21 |
| Impuls-Begrenzer | R&S | ESH3-Z2 | 100281 | 2014-08-21 | 2015-08-20 |
| System Controller | CT | SC100 | - | | |
| Printer | EPSON | РНОТО ЕХЗ | CFNH234850 | | - |
| Computer | IBM | 8434 | 1S8434KCE99BLXLO* | - | 1 |
| Loop Antenna | EMCO | 6502 | 00042960 | 2014-08-22 | 2015-08-21 |
| ESPI Test Receiver | R&S | ESI26 | 838786/013 | 2014-08-22 | 2015-08-21 |
| 3m OATS | | | N/A | 2014-08-21 | 2015-08-20 |
| Horn Antenna | R&S | BBHA 9170 | BBHA9170265 | 2014-08-23 | 2015-08-22 |
| Horn Antenna | R&S | BBHA 9120D | 9120D-631 | 2014-08-23 | 2015-08-22 |
| Power meter | Anritsu | ML2487A | 6K00003613 | 2014-08-22 | 2015-08-21 |
| Power sensor | Anritsu | MA2491A | 32263 | 2014-08-22 | 2015-08-21 |
| Bilog Antenna | Schwarebeck | VULB9163 | 9163/340 | 2014-08-23 | 2015-08-22 |
| LISN | AFJ | LS16C | 10010947251 | 2014-08-21 | 2015-08-20 |
| LISN (Three Phase) | Schwarebeck | NSLK 8126 | 8126453 | 2014-08-22 | 2015-08-21 |
| 9*6*6 Anechoic | | | N/A | 2014-08-21 | 2015-08-20 |
| EMI Test Receiver | RS | ESCS30 | 100139 | 2014-08-22 | 2015-08-21 |

2.1 **Auxiliary Equipment**

| Name | Model No. | Rating | Manufacturer | FCC ID/DOC |
|---------------------|-----------|--------|--------------|------------|
| Passive Earphone | | | | |

Page 7 of 84

Report No: FCC1507166-02

Date: 2015-08-20



3.0 **Technical Details**

3.1 **Summary of test results**

The EUT has been tested according to the following specifications:

| Requirement | CFR 47 Section | Result | Notes |
|---|---|--------|----------|
| Antenna Requirement | 15.203, 15.247(b)(4) | PASS | Complies |
| Maximum Peak Out Power | 15.247 (b)(1), (4) | PASS | Complies |
| Carrier Frequency Separation | 15.247(a)(1) | PASS | Complies |
| 20dB Channel Bandwidth | 15.247 (a)(1) | PASS | Complies |
| Number of Hopping Channels | 15.247(a)(iii), 15.247(b)(1) | PASS | Complies |
| Time of Occupancy (Dwell Time) | 15.247(a)(iii) | PASS | Complies |
| Spurious Emission, Band Edge, and Restricted bands | 15.247(d),15.205(a), 15.209 (a),15.109 | PASS | Complies |
| Conducted Emissions | 15.207(a), 15.107 | PASS | Complies |
| RF Exposure | 15.247(i), 1.1307(b)(1) | PASS | Complies |

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247 and ANSI C63.4:2014 AND ANSI C63.10:2013

EUT Modification 4.0

No modification by Shenzhen Timeway Technology Consulting Co., Ltd

Page 8 of 84


Report No: FCC1507166-02

Date: 2015-08-20



5. Power Line Conducted Emission Test

5.1 Schematics of the test




EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2014. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2014.

Test Voltage: 120V~60Hz Block diagram of Test setup

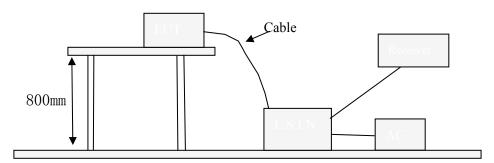

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2014. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

Date: 2015-08-20



A. EUT

| Device | Manufacturer | Model | FCC ID |
|--------------------|-------------------------------|------------------------|-----------|
| | ShenZhen Jingwah-Kaoge | | |
| Smart Mobile phone | Communication Technology Co., | NOW QS5, A3 REVOLUTION | 2AFJX-M45 |
| | Ltd. | | |

B. Internal Device

| Device | Manufacturer | Model | Rating |
|--------|--------------|-------|--------|
| | | | |

C. Peripherals

| Device | Manufacturer | Model | FCC ID/DOC | Cable |
|--------|--------------|-------|------------|-------|
| | | | | |
| | | | | |

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2014.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.107, 15.207

| Frequency | Class A Lim | its (dB µ V) | Class B Limits (dB µ V) | | |
|------------------|------------------|---------------|-------------------------|---------------|--|
| (MHz) | Quasi-peak Level | Average Level | Quasi-peak Level | Average Level | |
| $0.15 \sim 0.50$ | 79.0 | 66.0 | 66.0~56.0* | 56.0~46.0* | |
| $0.50 \sim 5.00$ | 73.0 | 60.0 | 56.0 | 46.0 | |
| 5.00 ~ 30.00 | 73.0 | 60.0 | 60.0 | 50.0 | |

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

The report refers only to the sample tested and does not apply to the bulk.

Date: 2015-08-20



A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Humidity: 65%RH Atmospheric Pressure: 101 KPa Temperature: 26°C

EUT set Condition: Keep Bluetooth Transmitting

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

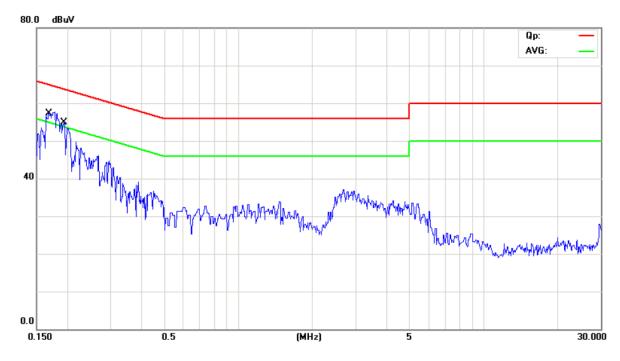

| No. Mk. | Freq. | Reading Level | Correct Factor | Measure- ment | Limit | Over | | |
|---------|--------|------------------|-------------------|------------------|-------|--------|----------|---------|
| | MHz | dBu∀ | dB | dBuV | dBuV | dB | Detector | Comment |
| 1 * | 0.1705 | 43.60 | 11.02 | 54.62 | 64.94 | -10.32 | QP | |
| 2 | 0.1705 | -0.20 | 11.02 | 10.82 | 54.94 | -44.12 | AVG | |
| 3 | 0.1944 | 41.70 | 11.05 | 52.75 | 63.85 | -11.10 | QP | |
| 4 | 0.1944 | 1.20 | 11.05 | 12.25 | 53.85 | -41.60 | AVG | |

Date: 2015-08-20



Conducted Emission on Neutral Terminal (150kHz to 30MHz) B:

EUT Operating Environment


Temperature: 26℃ Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep Bluetooth Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

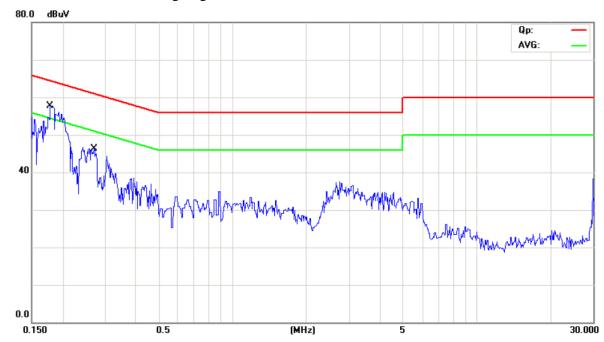

| No. Mk. | Freq. | Reading Level | Correct Factor | Measure- ment | Limit | Over | | |
|---------|--------|------------------|-------------------|------------------|-------|--------|----------|---------|
| | MHz | dBuV | dB | dBu∀ | dBuV | dB | Detector | Comment |
| 1 * | 0.1785 | 42.80 | 11.03 | 53.83 | 64.56 | -10.73 | QP | |
| 2 | 0.1785 | 8.60 | 11.03 | 19.63 | 54.56 | -34.93 | AVG | |
| 3 | 0.2700 | 27.90 | 11.13 | 39.03 | 61.12 | -22.09 | QP | |
| 4 | 0.2700 | -8.00 | 11.13 | 3.13 | 51.12 | -47.99 | AVG | |

Report No: FCC1507166-02 Page 12 of 84

Date: 2015-08-20



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10–2013. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10–2013.
- (3) The frequency spectrum from 30 MHz to 25GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization : Vertical polarization and Horizontal polarization.

Block diagram of Test setup Distance = 3m Computer Pre -Amplifier EUT Turn-table Receiver

- 6.2 Configuration of The EUT

 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

The report refers only to the sample tested and does not apply to the bulk.

Report No: FCC1507166-02 Page 13 of 84

Date: 2015-08-20



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109

| Frequency Range (MHz) | Distance (m) | Field strength (dB µ V/m) |
|-----------------------|--------------|---------------------------|
| 30-88 | 3 | 40.0 |
| 88-216 | 3 | 43.5 |
| 216-960 | 3 | 46.0 |
| Above 960 | 3 | 54.0 |

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
- 5. All modulation have been tested GFSK was found as the worst case and only reported

Report No: FCC1507166-02 Page 14 of 84

Date: 2015-08-20



Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal/Vertical (30MHz----1000MHz)

EUT set Condition: Keep Bluetooth Transmitting

Results: Pass

| Frequency (MHz) | Level@3m (dB \u03bc V/m) | Antenna Polarity | Limit@3m (dB µ V/m) |
|-----------------|--------------------------|------------------|---------------------|
| 958.200 | 42.61 | Н | 46.00 |
| 30.920 | 31.06 | Н | 40.00 |
| | | | |
| 66.520 | 35.59 | V | 40.00 |
| 958.240 | 41.34 | V | 46.00 |
| 110.400 | 40.06 | V | 43.50 |
| 260.760 | 38.21 | V | 46.00 |


Page 15 of 84

Report No: FCC1507166-02

Date: 2015-08-20



Test Figure:

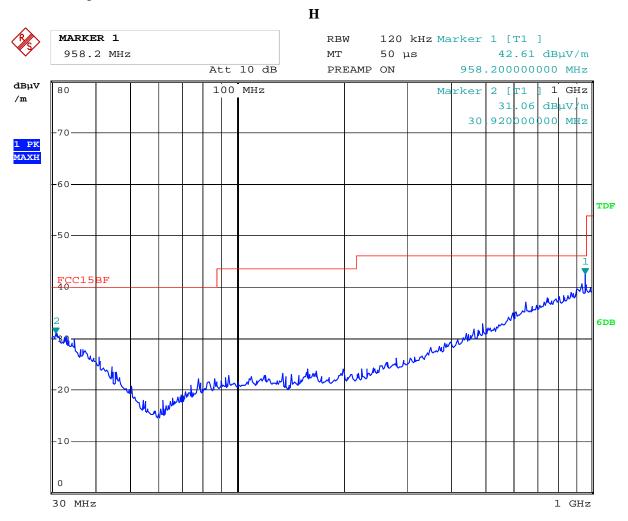

29.JUL.2015 17:10:39 Date:


Page 16 of 84

Report No: FCC1507166-02

Date: 2015-08-20



Test Figure:

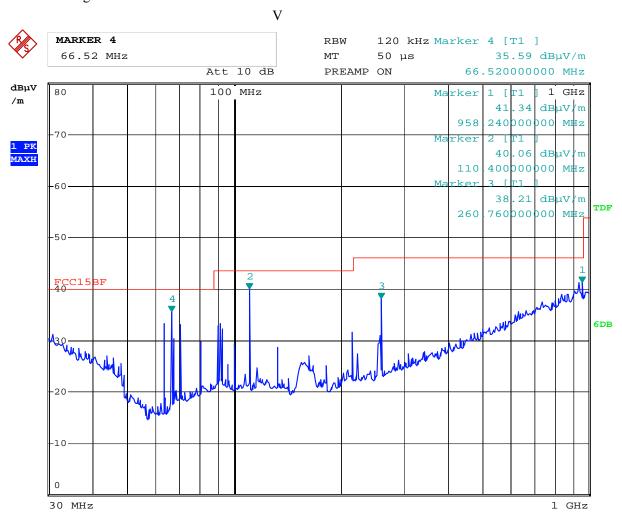

29.JUL.2015 17:04:46 Date:

Report No: FCC1507166-02 Page 17 of 84

Date: 2015-08-20



Operation Mode: Transmitting under Low Channel (2402MHz)

| Frequency (MHz) | Level@3m (dB \u03b4 V/m) | Antenna Polarity | Limit@3m (dB \(\mu \)V/m) |
|-----------------|--------------------------|------------------|----------------------------|
| 4804 | 1 | Н | 74(Peak)/ 54(AV) |
| 4804 | • | V | 74(Peak)/ 54(AV) |
| 7206 | - | H/V | 74(Peak)/ 54(AV) |
| 9608 | - | H/V | 74(Peak)/ 54(AV) |
| 12010 | - | H/V | 74(Peak)/ 54(AV) |
| 14412 | | H/V | 74(Peak)/ 54(AV) |
| 16814 | | H/V | 74(Peak)/ 54(AV) |
| 19216 | | H/V | 74(Peak)/ 54(AV) |
| 21618 | | H/V | 74(Peak)/ 54(AV) |
| 24020 | - | H/V | 74(Peak)/ 54(AV) |

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Operation Mode: Transmitting g under Middle Channel (2441MHz)

| Frequency (MHz) | Level@3m (dB \u03b4 V/m) | Antenna Polarity | Limit@3m (dB \(\mu \)V/m) |
|-----------------|--------------------------|------------------|----------------------------|
| 4882 | 1 | Н | 74(Peak)/ 54(AV) |
| 4882 | 1 | V | 74(Peak)/ 54(AV) |
| 7323 | - | H/V | 74(Peak)/ 54(AV) |
| 9764 | | H/V | 74(Peak)/ 54(AV) |
| 12205 | | H/V | 74(Peak)/ 54(AV) |
| 14646 | | H/V | 74(Peak)/ 54(AV) |
| 17087 | | H/V | 74(Peak)/ 54(AV) |
| 19528 | | H/V | 74(Peak)/ 54(AV) |
| 21969 | | H/V | 74(Peak)/ 54(AV) |
| 24410 | | H/V | 74(Peak)/ 54(AV) |

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Report No: FCC1507166-02 Page 18 of 84

Date: 2015-08-20



Operation Mode: Transmitting under High Channel (2480MHz)

| Frequency (MHz) | Level@3m (dB \u03b4 V/m) | Antenna Polarity | Limit@3m (dB µ V/m) |
|-----------------|--------------------------|------------------|---------------------|
| 4960 | 1 | Н | 74(Peak)/ 54(AV) |
| 4960 | • | V | 74(Peak)/ 54(AV) |
| 7440 | - | H/V | 74(Peak)/ 54(AV) |
| 9920 | - | H/V | 74(Peak)/ 54(AV) |
| 12400 | - | H/V | 74(Peak)/ 54(AV) |
| 14880 | | H/V | 74(Peak)/ 54(AV) |
| 17360 | | H/V | 74(Peak)/ 54(AV) |
| 19840 | - | H/V | 74(Peak)/ 54(AV) |
| 22320 | | H/V | 74(Peak)/ 54(AV) |
| 24800 | | H/V | 74(Peak)/ 54(AV) |

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit


^{2.} Remark "---" means that the emissions level is too low to be measured

Date: 2015-08-20




Please refer to the following test plots for details:

Low Channel: Horizontal

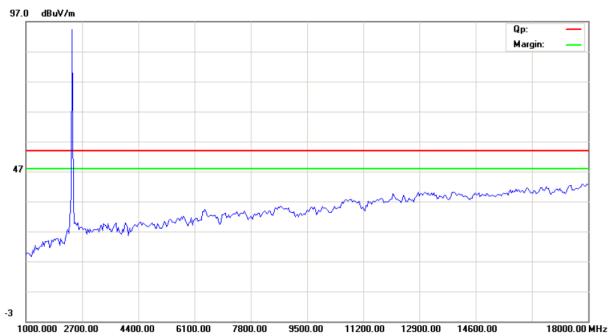

Low Channel: Vertical

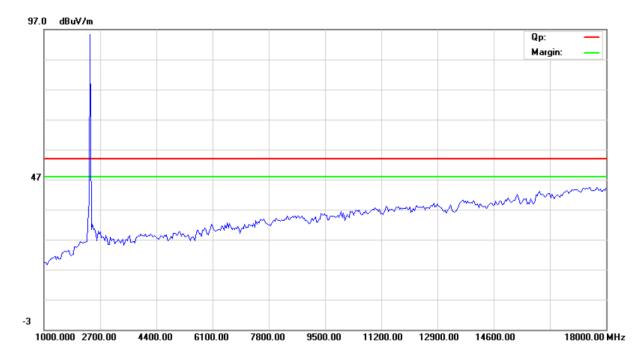

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.


Date: 2015-08-20



Middle Channel: Horizontal

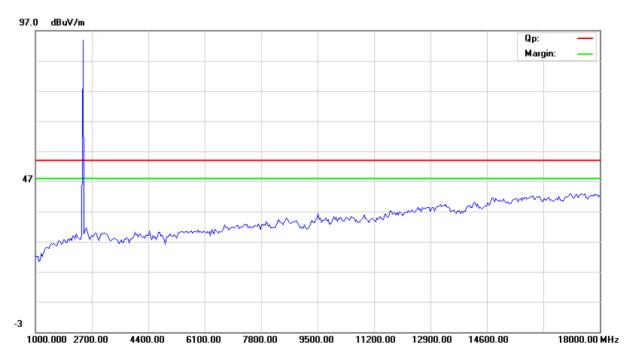

Middle Channel: Vertical

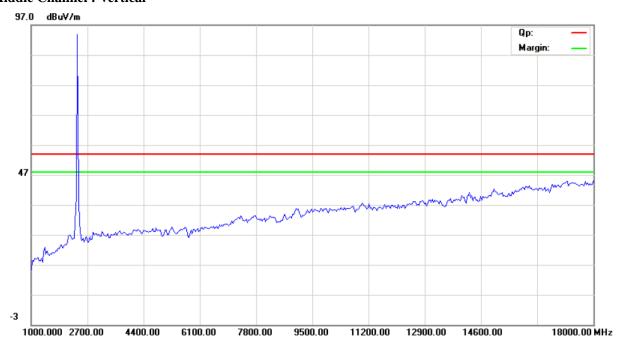

The report refers only to the sample tested and does not apply to the bulk.

This report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.


Date: 2015-08-20



High Channel: Horizontal

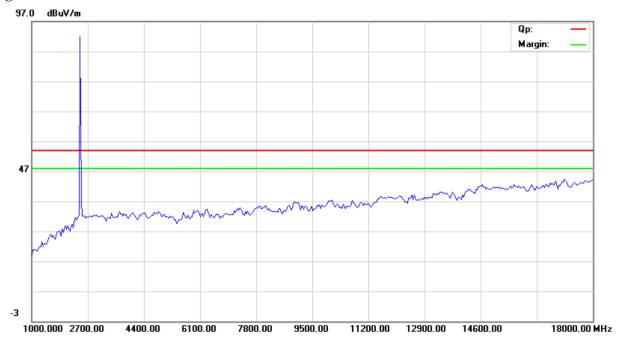

High Channel: Vertical

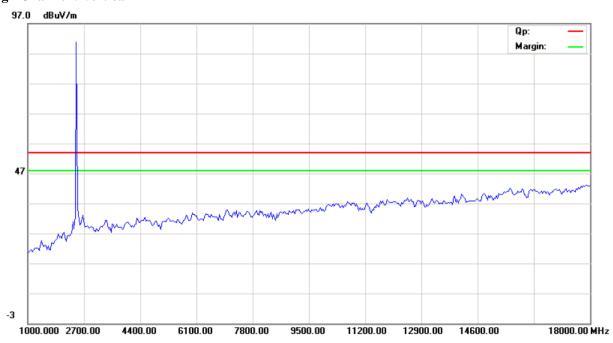

Note: for the radiated emissions above 18G, it is the floor noise.

Report No: FCC1507166-02 Page 22 of 84

Date: 2015-08-20



7.0 20dB Bandwidth Measurement

7.1 Regulation

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

7.2 Limits of 20dB Bandwidth Measurement

N/A

7.3 Test Procedure.

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span =3MHz, RBW =30 kHz, VBW=100 kHz, Sweep = auto Detector function = peak, Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results. 6. Repeat above procedures until all frequencies measured were complete.

7.4 Test Result

Type of Modulation: GFSK

| EUT | | Smart Mol | Smart Mobile phone | | Model | | S5, A3 REVOLUTION |
|---------|------|-------------------------|----------------------|----------|--------|------------|-------------------|
| Mode | • | Keep Trai | smitting Input Volta | | oltage | | DC3.7V |
| Tempera | ture | 24 de | eg. C, | Humidity | | 56% RH | |
| Channel | Cha | nnel Frequency (MHz) | 20 dB Baı (kH. | | | Pass/ Fail | |
| Low | | 2402 | 890 | | | | Pass |
| Middle | | 2441 | 896 | · | | | Pass |
| High | | 2480 | 884 | 1 | | | Pass |

Page 23 of 84


Report No: FCC1507166-02

Date: 2015-08-20



Test Figure:

1. Condition: Low Channel

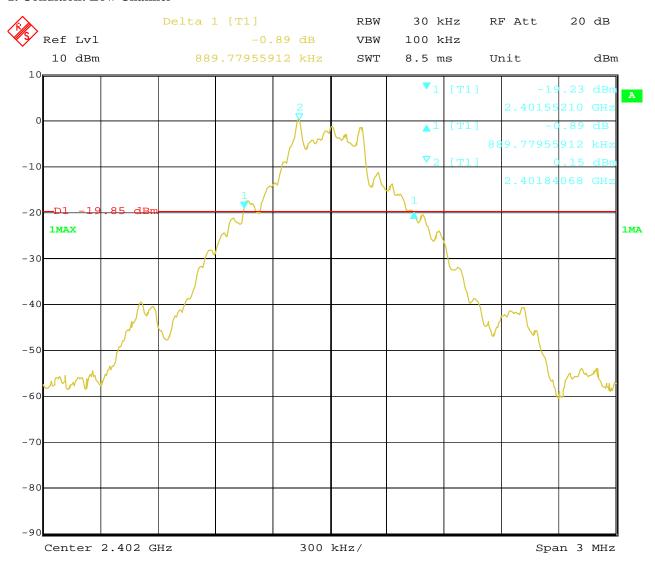

Date: 31.JUL.2015 15:53:00


Page 24 of 84

Report No: FCC1507166-02

Date: 2015-08-20



2. Condition: Middle Channel

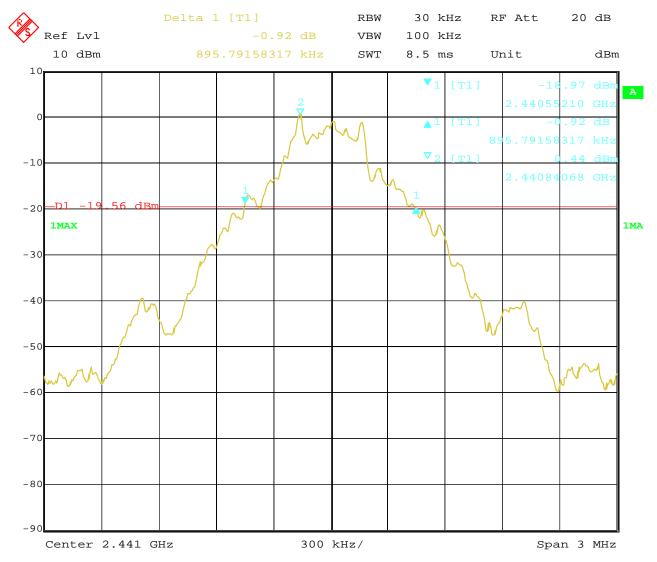

31.JUL.2015 15:50:52 Date:


Page 25 of 84

Report No: FCC1507166-02

Date: 2015-08-20



3. High Channel

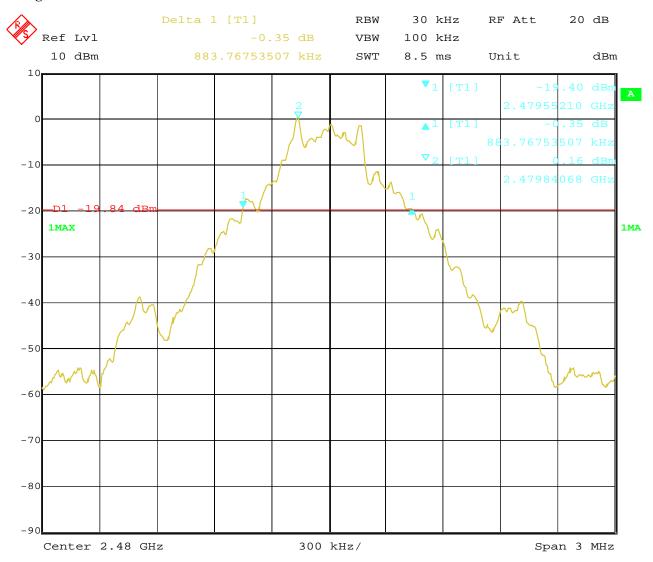

31.JUL.2015 15:48:54 Date:

Report No: FCC1507166-02 Page 26 of 84

Date: 2015-08-20



Test Result

Type of Modulation: Л/4DQPSK

| EUT | | Smart Mobile phone Model | | NOW QS: | | 5, A3 REVOLUTION | | | |
|----------|------|--------------------------|--------------------------|----------|------------------------|------------------|----------------|--|--------|
| Mode | ; | Keep Tra | ansmitting Input Voltage | | Input Voltage | | Voltage DC3.7V | | DC3.7V |
| Temperat | ture | 24 de | eg. C, | Humidity | | | 56% RH | | |
| Channel | Cha | nnel Frequency (MHz) | 20 dB Bandwidth (kHz) | | Maximum Limit (kHz) | | Pass/ Fail | | |
| Low | | 2402 | 113 | 1136 | | | Pass | | |
| Middle | | 2441 | 113 | 0 | | | Pass | | |
| High | | 2480 | 113 | 6 | | | Pass | | |

Page 27 of 84


Report No: FCC1507166-02

Date: 2015-08-20



Test Figure:

1. Condition: Low Channel

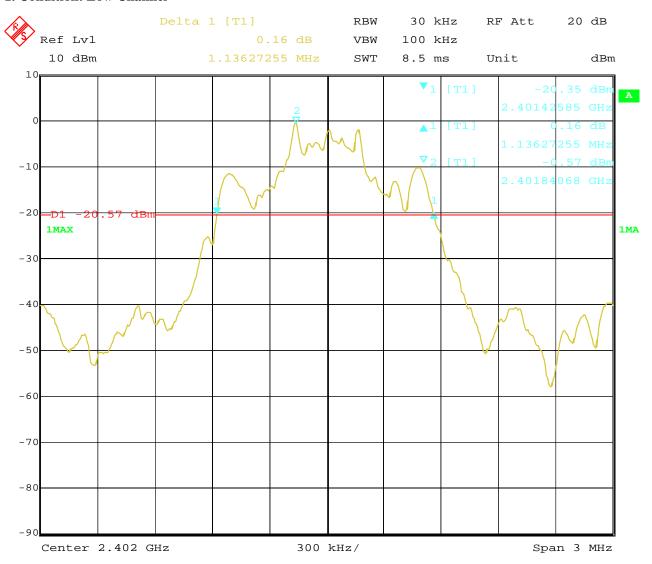

Date: 31.JUL.2015 15:55:34


Page 28 of 84

Report No: FCC1507166-02

Date: 2015-08-20



2. Condition: Middle Channel

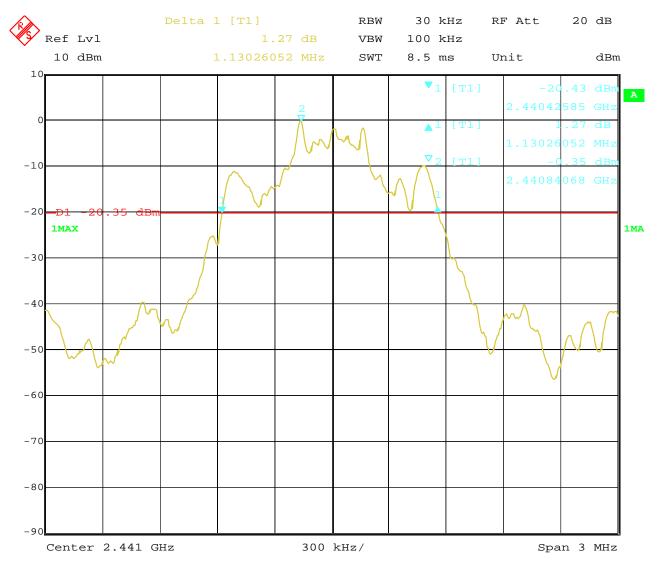

31.JUL.2015 15:57:25 Date:


Page 29 of 84

Report No: FCC1507166-02

Date: 2015-08-20



3. High Channel

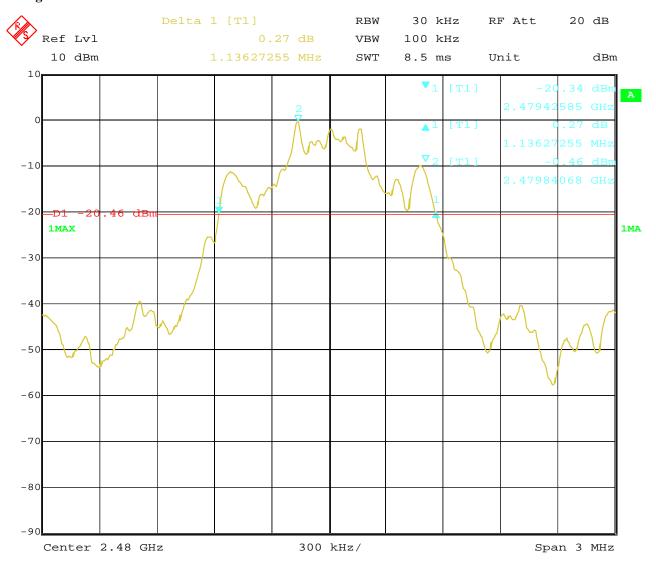

31.JUL.2015 15:59:34 Date:

Date: 2015-08-20



Page 30 of 84

Test Result

Type of Modulation: 8DPSK

| EUT | | Smart Mobile phone Model | | NOW QS5, | | , A3 REVOLUTION | | |
|---------|------|--------------------------|------------------------|-------------------------|----|---------------------|------------|--|
| Mode | 9 | Keep Trai | smitting Input Voltage | | ge | | DC3.7V | |
| Tempera | ture | 24 de | g. C, | Humidity | | | 56% RH | |
| Channel | Cha | nnel Frequency (MHz) | | 20dB Bandwidth (kHz) | | imum Limit (kHz) | Pass/ Fail | |
| Low | | 2402 | 11 | 1154 | | | Pass | |
| Middle | | 2441 | 11 | 154 | | | Pass | |
| High | · | 2480 | 11 | 160 | | | Pass | |

Page 31 of 84


Report No: FCC1507166-02

Date: 2015-08-20



Test Figure:

1. Condition: Low Channel

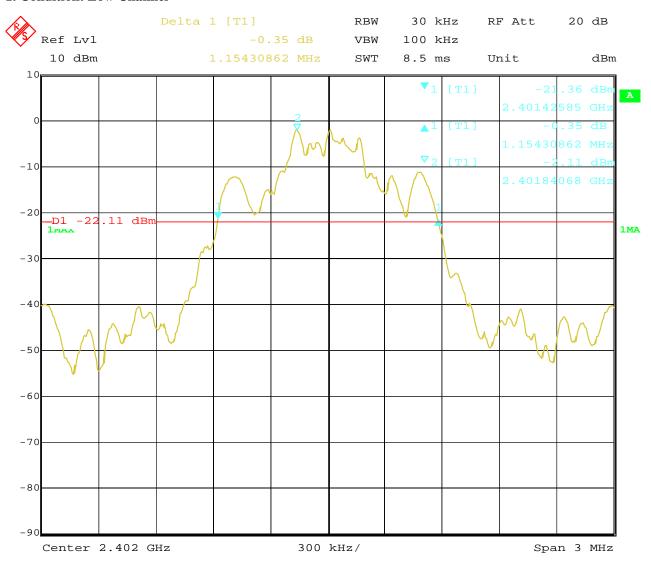

31.JUL.2015 16:04:18 Date:


Page 32 of 84

Report No: FCC1507166-02

Date: 2015-08-20



2. Condition: Middle Channel

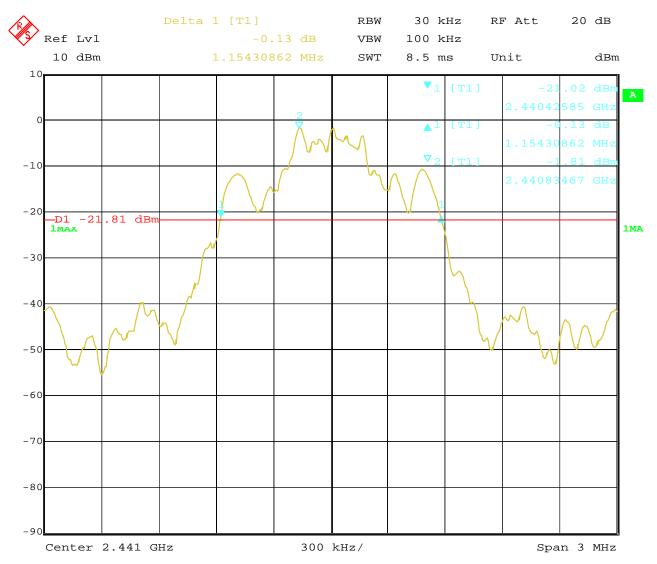


31.JUL.2015 16:02:56 Date:

Report No: FCC1507166-02 Page 33 of 84

Date: 2015-08-20



3. High Channel

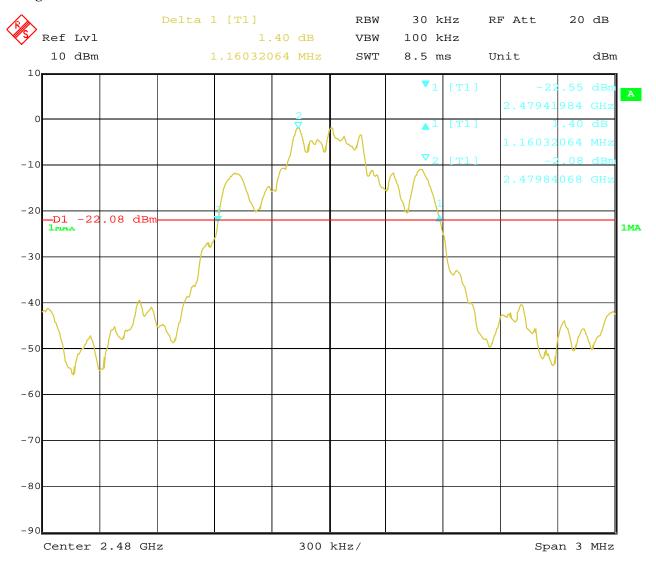

31.JUL.2015 16:01:05 Date:

Date: 2015-08-20



Page 34 of 84

8. Maximum Output Power

8.1 Regulation

According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5MHz band:0.125 watts. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel; RBW > the 20 dB bandwidth of the emission being measured; VBW = 10MHz, RBW=3MHz; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results.
- 4. Repeat above procedures until all frequencies measured were complete.

Date: 2015-08-20



8.4Test Results

Type of Modulation: GFSK

| EUT | Smart Mobile phone Model | | NOW QS5, A3 REVOLUTION | | | | |
|-------------|--------------------------|------------------------|-------------------------|-----------|---------------|-----------------|------------|
| Mode | | Keep Tran | smitting | Input Vol | Input Voltage | | DC3.7V |
| Temperature | e | 24 deg | g. C, | Humidity | 7 | 56% RH | |
| Channel | Cł | nannel Frequency (MHz) | Max. Power Output (dBm) | | 1011 | er Limit Bm) | Pass/ Fail |
| | | () | Peak | Average | (dDIII) | | |
| Low | | 2402 | 5.51 | 1.45 | | 30 | Pass |
| Middle | | 2441 | 5.69 | 1.77 | | 30 | Pass |
| High | | 2480 | 5.63 | 1.75 | | 30 | Pass |

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

2. The worse case was recorded

Type of Modulation: JI/4DOPSK

| EUT | Smart Mobile phone Model | | | NOW QS5, A3 REVOLUTION | | | |
|-------------|--------------------------|------------|-------------------|---------------------------|--------|------------|--|
| Mode | Keep Trai | nsmitting | Input Vo | ltage DC3.7V | | | |
| Temperature | e 24 de | 24 deg. C, | | | 56% RH | | |
| Channel | Channel Frequency (MHz) | | ver Output 3m) | Peak Power Limit (dBm) | | Pass/ Fail | |
| | | Peak | Average | | | | |
| Low | 2402 | 4.57 | 0.52 | 30 | | Pass | |
| Middle | 2441 | 4.88 | 0.86 | 3 | 30 | Pass | |
| High | 2480 | 4.70 | 0.74 | 3 | 30 | Pass | |

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

2. The worse case was recorded

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Report No: FCC1507166-02 Page 36 of 84

Date: 2015-08-20



Type of Modulation: 8DPSK

| EUT | | Smart Mob | ile phone | Model | | NOW Q | S5, A3 REVOLUTION | | |
|-------------|----|------------------------|-------------------------|-------|------------------|-----------|-------------------|--------|--|
| Mode | | Keep Tran | smitting | I | nput Voltage | | | DC3.7V | |
| Temperature | е | 24 deş | g. C, | ŀ | Humidi | ty | | 56% RH | |
| Channel | Cł | nannel Frequency (MHz) | Max. Power Output (dBm) | | Peak Power Limit | | Pass/ Fail | | |
| | | (11112) | Peak | Ave | rage | (4.2.11.) | | | |
| Low | | 2402 | 4.45 | 0.4 | 43 | 3 | 0 | Pass | |
| Middle | | 2441 | 4.80 | 0. | 72 | 3 | 0 | Pass | |
| High | | 2480 | 4.63 | 0.: | 59 | 3 | 0 | Pass | |

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

2. The worse case was recorded

Date: 2015-08-20



Page 37 of 84

9. Carrier Frequency Separation

9.1 Regulation

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

9.2 Limits of Carrier Frequency Separation

The Maximum Power Spectral Density Measurement is 25kHz or two-thirds of the 20dB bandwidth of the hopping Channel which is great.

9.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = wide enough to capture the peaks of two adjacent channels: Resolution (or IF) Bandwidth (RBW) \geq 1% of the span; Video (or Average) Bandwidth (VBW) \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Measure the separation between the peaks of the adjacent channels using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.

Date: 2015-08-20




9.4Test Result

Type of Modulation: GFSK

| EUT | Smart Mobile phone | | Model | NOW QS5, A3 REVOLUTION | |
|-------------|----------------------|----------|---------------|------------------------|------------|
| Mode | Hopping On | | Input Voltage | DC3.7V | |
| Temperature | 24 deg. C, | Humidity | | 56% RH | |
| Carrier I | Frequency Separation | | Limit | | Pass/ Fail |
| | 1.000MHz ≥ 2 | | | 0 dB bandwidth | Pass |

Test Plots

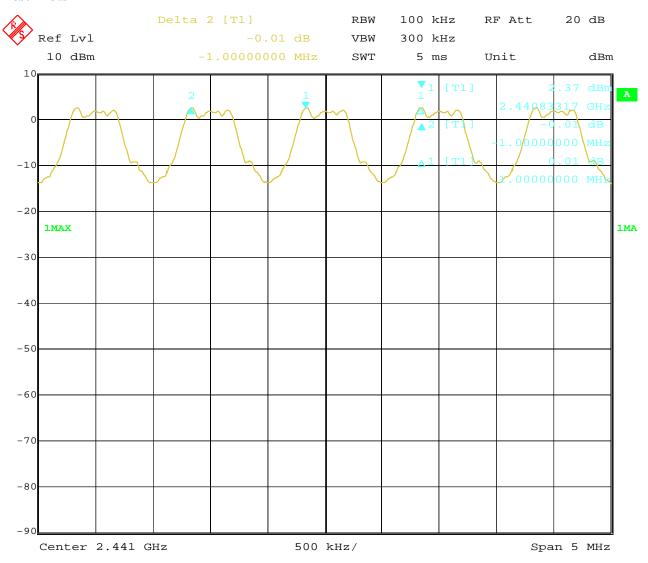

Date: 31.JUL.2015 14:44:38

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 39 of 84

Report No: FCC1507166-02


Date: 2015-08-20



Type of Modulation: Л/4DQPSK

| EUT | Smart Mobile phone | | Model | NOW QS5, A3 REVOLUTION | |
|------------------------------|--------------------|--------------|--------------------|------------------------|------------|
| Mode | Hopping On | | Input Voltage | DC3.7V | |
| Temperature | 24 deg. C, | Humidity 56% | | RH | |
| Carrier Frequency Separation | | | Limit | | Pass/ Fail |
| 1.000MHz | | ≥ | 25 kHz or 2/3 of 2 | Pass | |

Test Plots

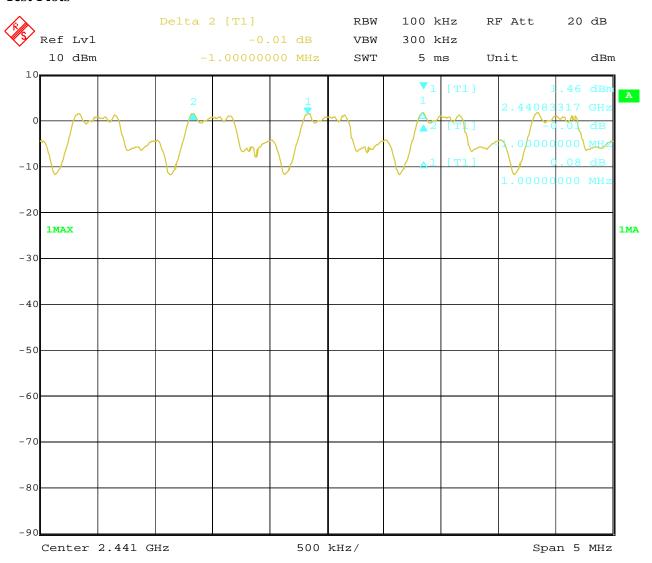

31.JUL.2015 12:02:03 Date:

Page 40 of 84

Report No: FCC1507166-02


Date: 2015-08-20



Type of Modulation: 8DPSK

| EUT | Smart Mobile phone | | Model | NOW QS5, A3 REVOLUTION | |
|------------------------------|--------------------|------------------------------------|---------------|------------------------|------------|
| Mode | Hopping On | | Input Voltage | DC3.7V | |
| Temperature | 24 deg. C, | | Humidity | 56% RH | |
| Carrier Frequency Separation | | | Limit | | Pass/ Fail |
| 1.000MHz | | ≥ 25 kHz or 2/3 of 20 dB bandwidth | | | Pass |

Test Plots

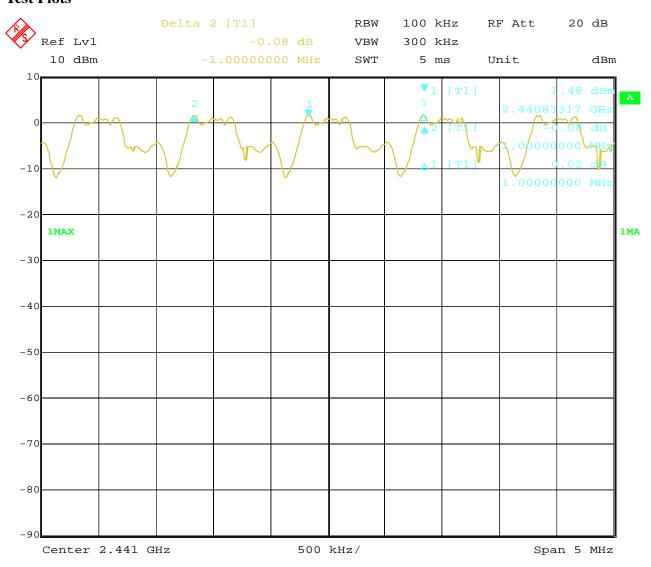

31.JUL.2015 12:28:50 Date:

Date: 2015-08-20



Page 41 of 84

10. Number of Hopping Channels

10.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used. According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

10.2 Limits of Number of Hopping Channels

The frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.

10.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = the frequency band of operation; RBW=100 kHz, VBW=300 kHz; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Record the number of hopping channels.

Date: 2015-08-20




10.4Test Result

Type of Modulation: GFSK

| EUT | Smart Mobile phone | | Model | NOW QS5, | |
|-------------------|--------------------|----------------------------|---------------|---------------|------------|
| | | | | A3 REVOLUTION | |
| Mode | | Hopping On | Input Voltage | DC3.7V | |
| Temperature | | 24 deg. C, | Humidity | 56% RH | |
| Operating Frequen | ncy | Number of hopping channels | | Limit | Pass/ Fail |
| 2402-2480MHz | | 79 | | ≥ 15 | Pass |

Test Plot

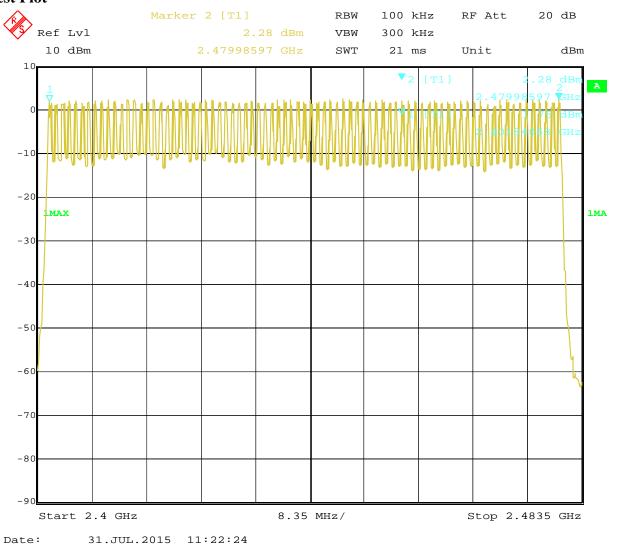

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.


Date: 2015-08-20



Type of Modulation: √1/4DQPSK

| EUT | Smart Mobile phone M | | Model | | - | NOW QS5, |
|---------------------|----------------------|----------------------------|---------------|-----|--------|------------|
| | | | | | A3 I | REVOLUTION |
| Mode | Hopping On | | Input Voltage | | DC3.7V | |
| Temperature | | 24 deg. C, | | ity | | 56% RH |
| Operating Frequency | | Number of hopping channels | | Lir | nit | Pass/ Fail |
| 2402-2480MHz | | 79 | | ≥ 2 | 15 | Pass |

Test Plot

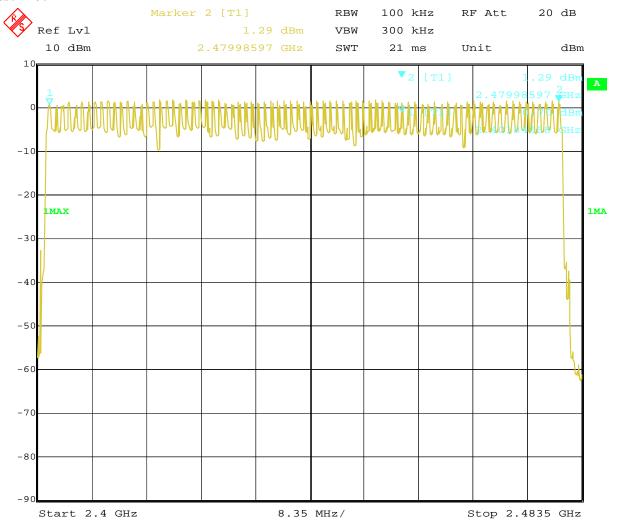

Date: 31.JUL.2015 11:38:38 Report No: FCC1507166-02 Page 44 of 84


Date: 2015-08-20



Type of Modulation: 8DPSK

| EUT | Smart Mobile phone | | Model | lel | | NOW QS5, |
|---------------------|--------------------|----------------------------|---------------|-------------|--------|------------|
| | | | | | A3 | REVOLUTION |
| Mode | Hopping On | | Input Voltage | | DC3.7V | |
| Temperature | 24 deg. C, | | Humidi | ity | 56% RH | |
| Operating Frequency | | Number of hopping channels | | Liı | nit | Pass/ Fail |
| 2402-2480MHz | | 79 | | <u>></u> | 15 | Pass |

Test Plot

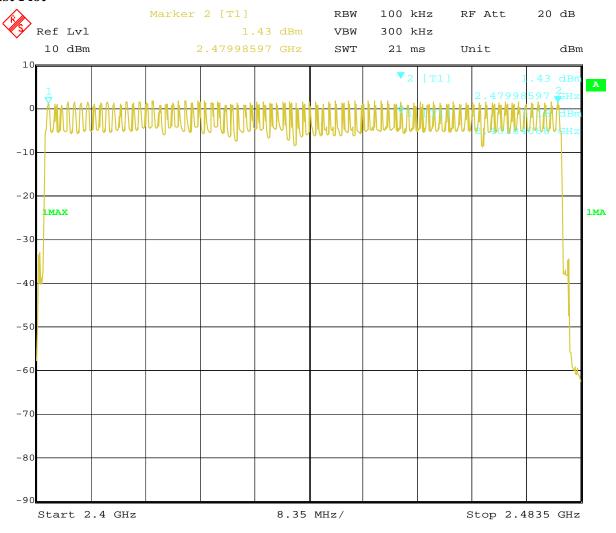

Date: 31.JUL.2015 11:32:09

Date: 2015-08-20



Page 45 of 84

11. Time of Occupancy (Dwell Time)

11.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

11.2 Limits of Carrier Frequency Separation

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed

11.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW \geqslant RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak;

Trace = max hold

- 3. Measure the dwell time using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.
- 5. Repeat this test for different modes of operation (e.g., data rate, modulation format, etc.), if applicable.

Page 46 of 84

Report No: FCC1507166-02 Date: 2015-08-20



11.4 Test Result

Type of Modulation: GFSK

| EUT | Smart M | obile phone | Model | NOW QS5, | A3 REVOLUTION | | | |
|------------|---------|-------------|---------------|----------|---------------|--|--|--|
| Mode | Keep Tr | ansmitting | Input Voltage |] | DC3.7V | | | |
| Temperatur | re 24 c | leg. C, | Humidity | | 56% RH | | | |
| Channel | Reading | Hoping | Hoping Rate | | Limit | | | |
| | DH5 | | | | | | | |
| Middle | 0.261ms | 266.667 | 7 hop/s | 0.0278s | 0.4s | | | |
| | | | DH3 | | | | | |
| Middle | 0.200ms | 400 h | nop/s | 0.0320s | 0.4s | | | |
| | DH1 | | | | | | | |
| Middle | 0.200ms | 800 h | iop/s | 0.0640s | 0.4s | | | |

Actual = Reading \times (Hopping rate / Number of channels) \times Test period, Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Page 47 of 84

Report No: FCC1507166-02


Date: 2015-08-20



Test Plots:

DH5

Middle Channel:

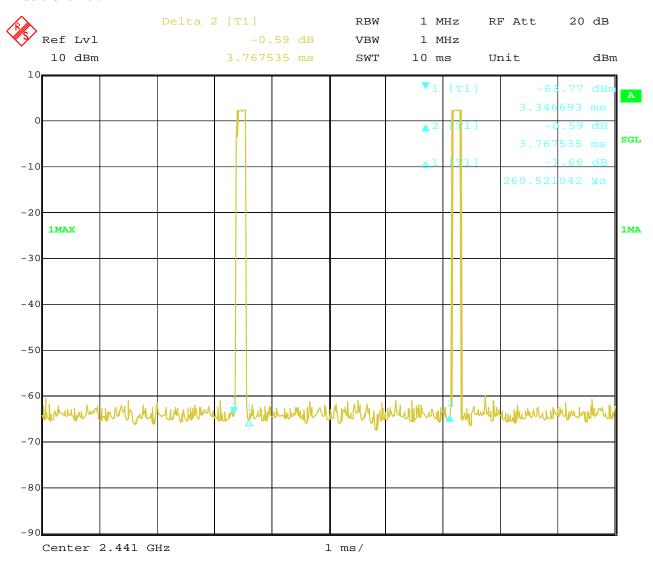

31.JUL.2015 Date: 16:17:19


Page 48 of 84

Report No: FCC1507166-02

Date: 2015-08-20



DH3

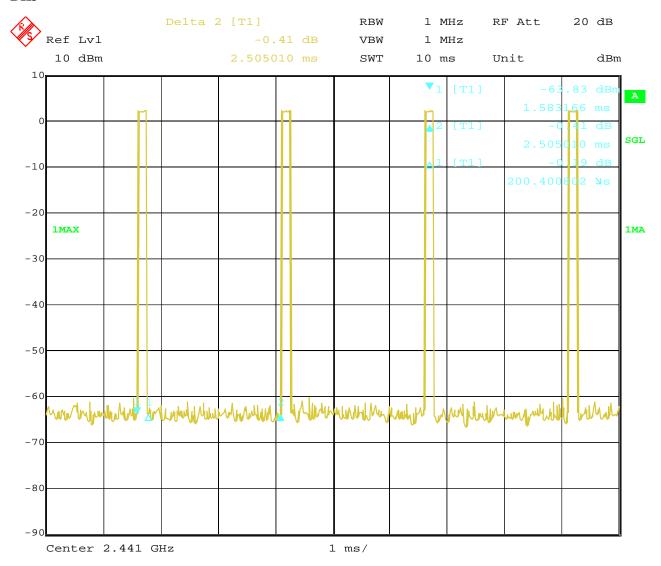

31.JUL.2015 16:16:05 Date:


Page 49 of 84

Report No: FCC1507166-02

Date: 2015-08-20



DH1

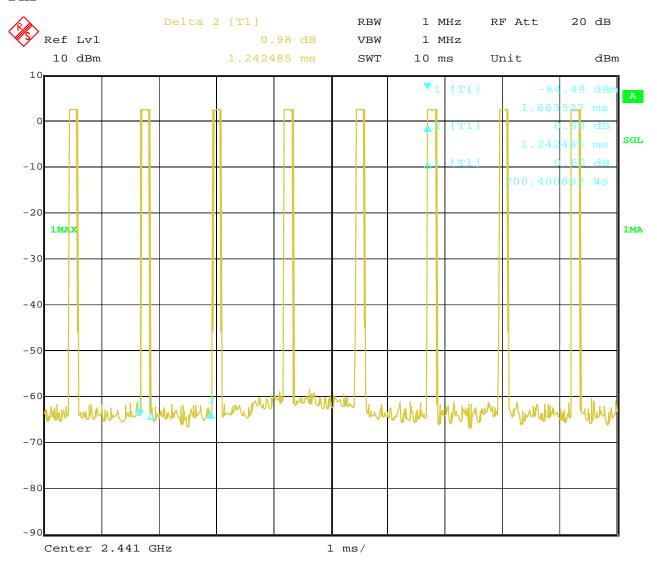

31.JUL.2015 16:15:18 Date:

Report No: FCC1507166-02 Page 50 of 84

Date: 2015-08-20



Test Result

Type of Modulation: Л/4DQPSK

| EUT | Smart M | Smart Mobile phone | | NOW QS5, | A3 REVOLUTION | | | |
|------------|---------|--------------------|---------------|----------|---------------|--|--|--|
| Mode | Keep Tr | ansmitting | Input Voltage |] | DC3.7V | | | |
| Temperatur | re 24 c | leg. C, | Humidity | | 56% RH | | | |
| Channel | Reading | Hoping | Hoping Rate | | Limit | | | |
| | DH5 | | | | | | | |
| Middle | 0.240ms | 266.667 | 7 hop/s | 0.0256s | 0.4s | | | |
| | | | DH3 | | | | | |
| Middle | 0.240ms | 400 h | nop/s | 0.0384s | 0.4s | | | |
| | DH1 | | | | | | | |
| Middle | 0.220ms | 800 h | iop/s | 0.0703s | 0.4s | | | |

Actual = Reading \times (Hopping rate / Number of channels) \times Test period, Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Page 51 of 84


Report No: FCC1507166-02

Date: 2015-08-20



Test Plots:

2DH5

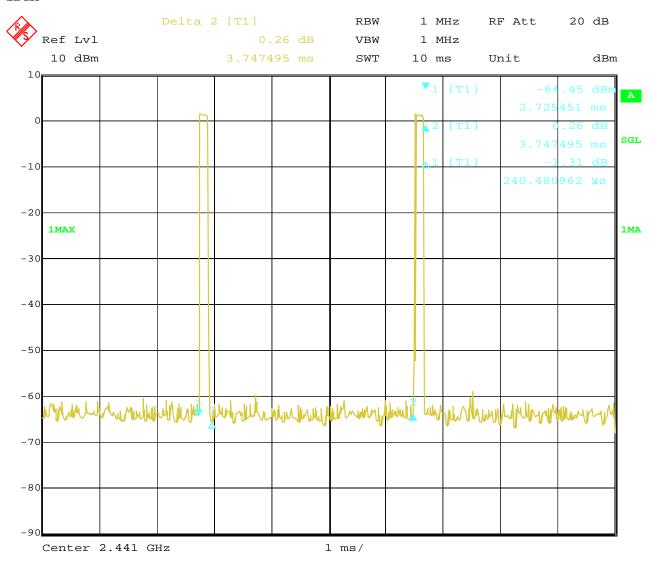

31.JUL.2015 16:19:59 Date:


Page 52 of 84

Date: 2015-08-20

Report No: FCC1507166-02



2DH3

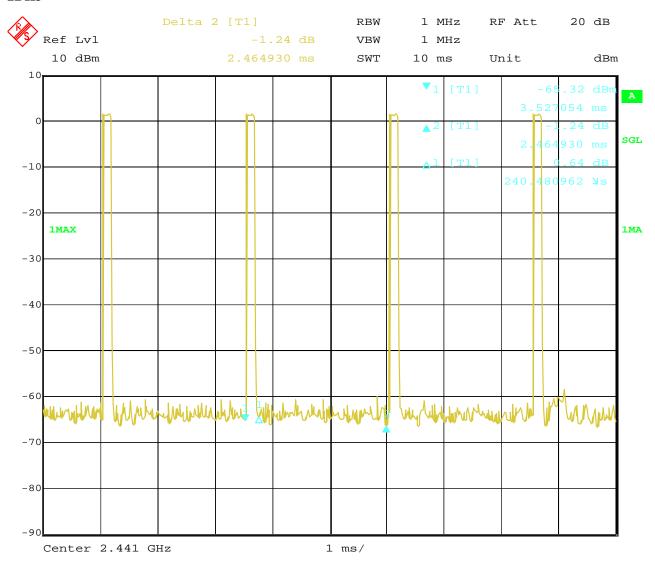

31.JUL.2015 16:19:23 Date:


Page 53 of 84

Report No: FCC1507166-02

Date: 2015-08-20



2DH1

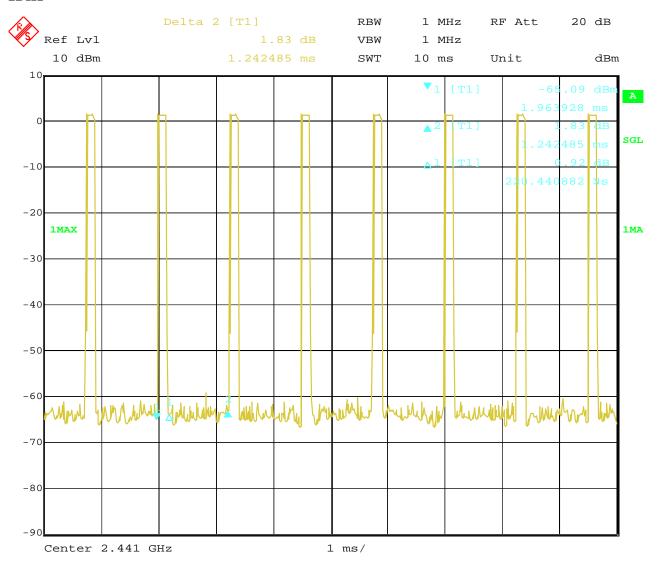

31.JUL.2015 16:18:27 Date:

Page 54 of 84

Date: 2015-08-20

Report No: FCC1507166-02



Type of Modulation: 8DPSK

| EUT | Smart M | Smart Mobile phone | | NOW QS5, | A3 REVOLUTION | | | | |
|------------|---------|--------------------|---------------|----------|---------------|--|--|--|--|
| Mode | Keep Tr | ansmitting | Input Voltage |] | DC3.7V | | | | |
| Temperatur | re 24 c | leg. C, | Humidity | : | 56% RH | | | | |
| Channel | Reading | Hoping | Hoping Rate | | Limit | | | | |
| | DH5 | | | | | | | | |
| Middle | 0.220ms | 266.667 | 7 hop/s | 0.0235s | 0.4s | | | | |
| | | | DH3 | | | | | | |
| Middle | 0.220ms | 400 h | nop/s | 0.0352s | 0.4s | | | | |
| | DH1 | | | | | | | | |
| Middle | 0.200ms | 800 h | nop/s | 0.0640s | 0.4s | | | | |

Actual = Reading × (Hopping rate / Number of channels) × Test period, Test period = 0.4 [seconds / channel] × 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of $625\mu s$ with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Page 55 of 84


Report No: FCC1507166-02

Date: 2015-08-20



Test Plots:

3DH5

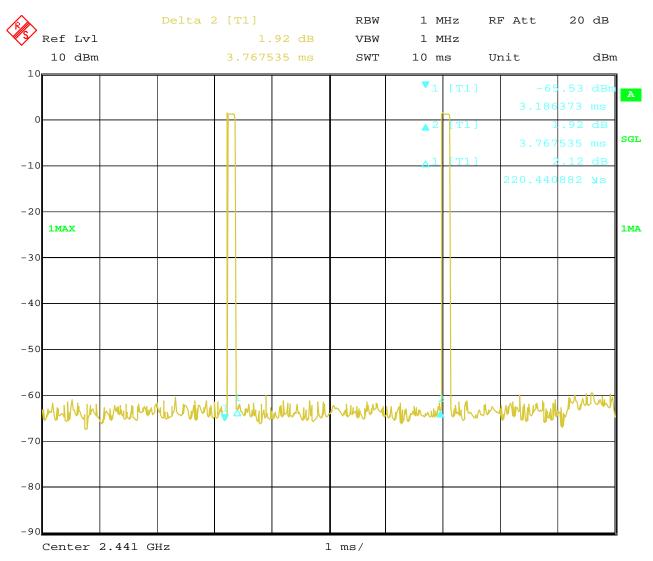

31.JUL.2015 16:22:22 Date:


Page 56 of 84

Report No: FCC1507166-02

Date: 2015-08-20



3DH3

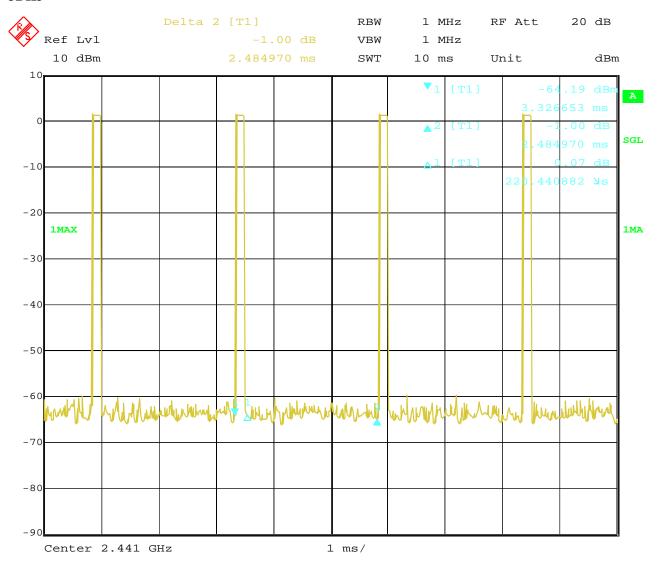

31.JUL.2015 16:21:42 Date:


Page 57 of 84

Report No: FCC1507166-02

Date: 2015-08-20



3DH1

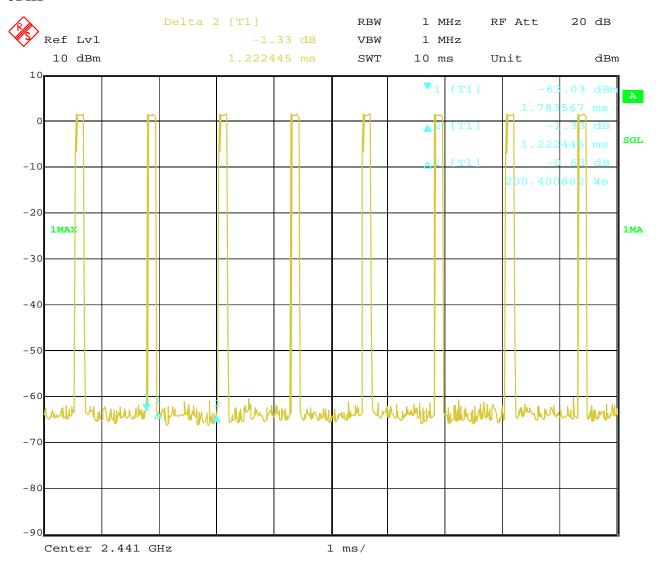

31.JUL.2015 16:20:43 Date:


Report No: FCC1507166-02 Page 58 of 84

Date: 2015-08-20



12 Out of Band Measurement

12.1 Test Setup



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

12.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

12.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test. Peak values with RBW=VBW=1MHz and PK detector.

For bandage test, the spectrum set as follows: RBW=100, VBW=300 kHz. A conducted measurement used

Note: 1. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

2. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Date: 2015-08-20




Type of Modulation: GFSK

Out of Band Test Result 12.4

| Product: | Smart Mobile phone | | Test Mode: | Low Channel |
|----------------|--------------------|-------------------|---------------|-----------------|
| Mode | Kee | ping Transmitting | Input Voltage | DC3.7V |
| Temperature | | 24 deg. C | | 56% RH |
| Test Result: | | Pass | | PK |
| The Max. FS in | PK ($dB\mu V/m$) | 46.8 | | $74(dB\mu V/m)$ |
| Restrict Band | $AV(dB\mu V/m)$ | | Limit | 54(dBμV/m) |
| 2390MHz | | | | |

Test Figure:

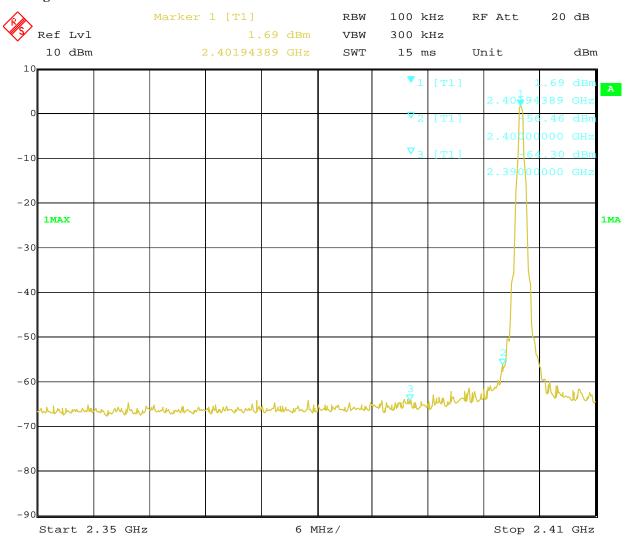

31.JUL.2015 15:23:25 Date:

Date: 2015-08-20




Type of Modulation: GFSK

Out of Band Test Result 12.4

| Product: | Smart Mobile phone | | Test Mode: | High Channel |
|----------------|----------------------|------|---------------|-----------------|
| Mode | Keeping Transmitting | | Input Voltage | DC3.7V |
| Temperature | 24 deg. C, | | Humidity | 56% RH |
| Test Result: | Pass | | Detector | PK |
| The Max. FS in | PK (dBμV/m) | 42.9 | | $74(dB\mu V/m)$ |
| Restrict Band | $AV(dB\mu V/m)$ | | Limit | $54(dB\mu V/m)$ |
| 2483.5MHz | | | | |

Test Figure:

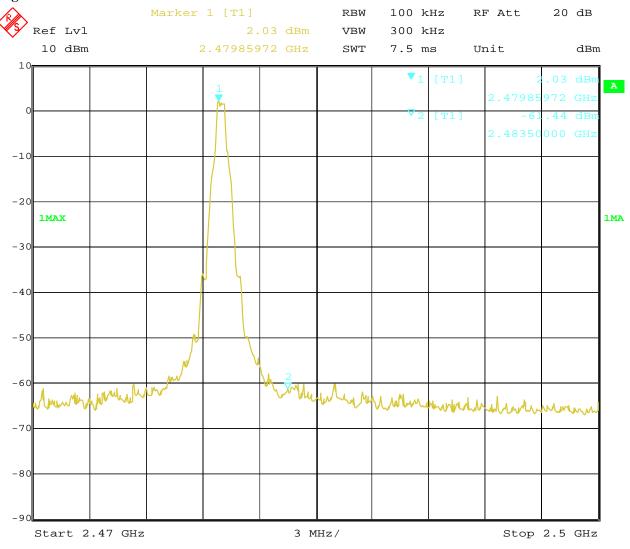

31.JUL.2015 15:34:48 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Date: 2015-08-20




Type of Modulation: GFSK

Out of Band Test Result

| Product: | Smart Mobile phone | | Test Mode: | Hopping mode |
|----------------|--------------------|------------|---------------|-----------------|
| Mode | Hopping On | | Input Voltage | DC3.7V |
| Temperature | 24 deg. C, | | Humidity | 56% RH |
| Test Result: | | Pass | | PK |
| The Max. FS in | PK (dBμV/m) | 44.3 | | $74(dB\mu V/m)$ |
| Restrict Band | $AV(dB\mu V/m)$ | AV(dBμV/m) | | 54(dBμV/m) |
| 2390MHz | | | | |

Test Figure:

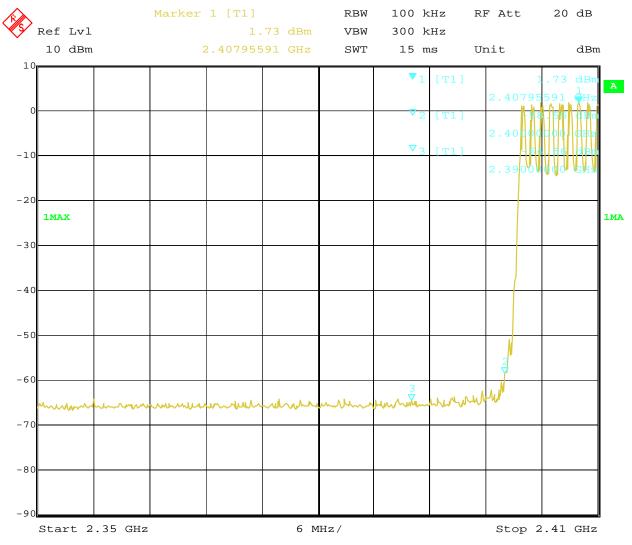

Date: 31.JUL.2015 15:22:19

Date: 2015-08-20




Type of Modulation: GFSK

Out of Band Test Result

| Product: | Smart Mobile phone | | Test Mode: | Hopping mode |
|----------------|--------------------|--|---------------|-----------------|
| Mode | Hopping On | | Input Voltage | DC3.7V |
| Temperature | 24 deg. C, | | Humidity | 56% RH |
| Test Result: | Pass | | Detector | PK |
| The Max. FS in | PK (dBμV/m) 41.5 | | | $74(dB\mu V/m)$ |
| Restrict Band | AV(dBμV/m) | | Limit | 54(dBμV/m) |
| 2483.5MHz | | | | |

Test Figure:

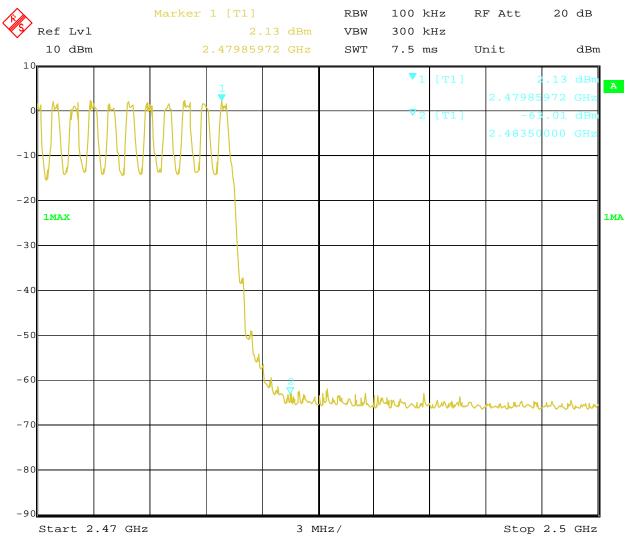

Date: 31.JUL.2015 14:48:53

Date: 2015-08-20




Type of Modulation: Л/4DQPSK

12.4 Out of Band Test Result

| Product: | Smart Mobile phone | | Test Mode: | Low Channel |
|----------------|----------------------|--|---------------|-----------------|
| Mode | Keeping Transmitting | | Input Voltage | DC3.7V |
| Temperature | 24 deg. C | | Humidity | 56% RH |
| Test Result: | Pass | | Detector | PK |
| The Max. FS in | PK (dBμV/m) 46.0 | | | $74(dB\mu V/m)$ |
| Restrict Band | AV(dBμV/m) | | Limit | 54(dBμV/m) |
| 2390MHz | | | | |

Test Figure:

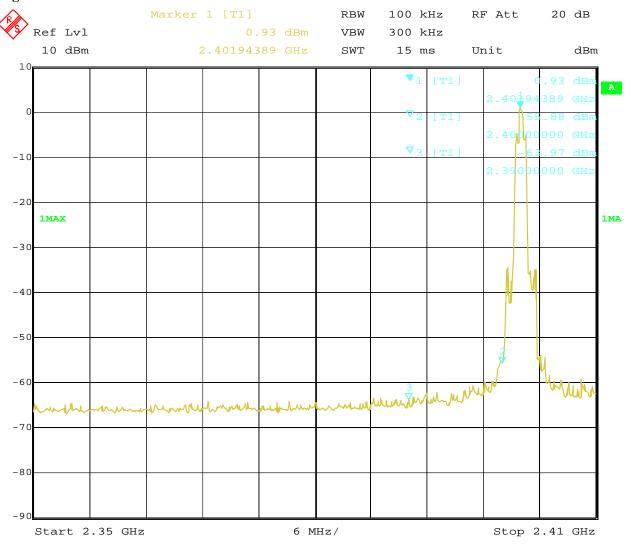

Date: 31.JUL.2015 15:25:59

Date: 2015-08-20




Type of Modulation: Л/4DQPSK

Out of Band Test Result

| Product: | Smart Mobile phone | | Test Mode: | High Channel |
|----------------|----------------------|-----------------|---------------|-----------------|
| 1 Toduct. | Silie | art Woone phone | Test Mode. | Trigii Chamiei |
| Mode | Keeping Transmitting | | Input Voltage | DC3.7V |
| Temperature | 24 deg. C, | | Humidity | 56% RH |
| Test Result: | Pass | | Detector | PK |
| The Max. FS in | PK (dBμV/m) 42.2 | | | $74(dB\mu V/m)$ |
| Restrict Band | AV(dBμV/m) | | Limit | 54(dBμV/m) |
| 2483.5MHz | | | | |

Test Figure:

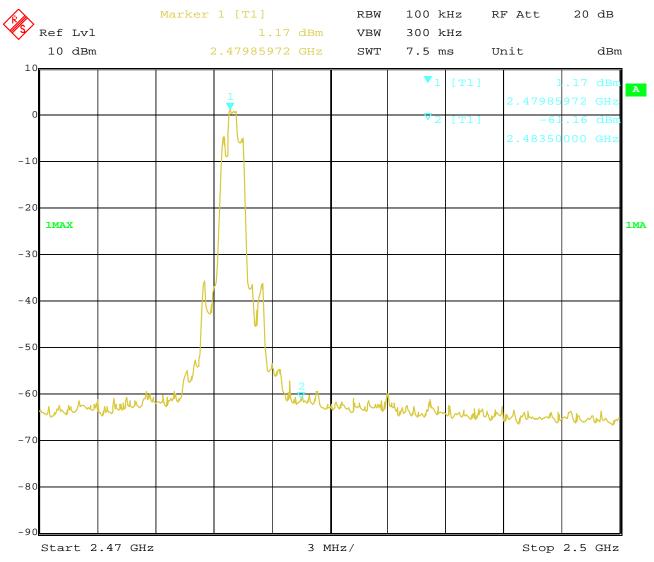

31.JUL.2015 Date: 15:32:59

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.


Date: 2015-08-20



Out of Band Test Result

| Product: | Smart Mobile phone | | Test Mode: | Hopping mode |
|----------------|--------------------|--|---------------|-----------------|
| Mode | Hopping On | | Input Voltage | DC3.7V |
| Temperature | 24 deg. C, | | Humidity | 56% RH |
| Test Result: | Pass | | Detector | PK |
| The Max. FS in | PK (dBμV/m) 43.5 | | | $74(dB\mu V/m)$ |
| Restrict Band | AV(dBμV/m) | | Limit | 54(dBμV/m) |
| 2390MHz | | | | |

Test Figure:

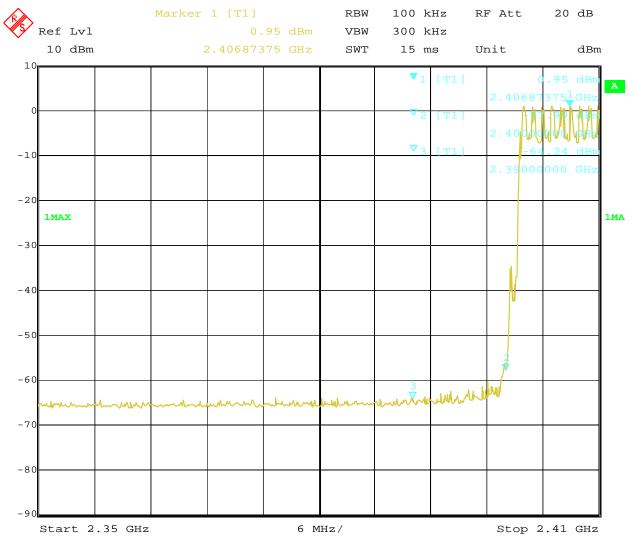

Date: 31.JUL.2015 15:18:32


Date: 2015-08-20



Out of Band Test Result

| Product: | Smart Mobile phone | | Test Mode: | Hopping mode |
|----------------|--------------------|--|---------------|-----------------|
| Mode | Hopping On | | Input Voltage | DC3.7V |
| Temperature | 24 deg. C, | | Humidity | 56% RH |
| Test Result: | Pass | | Detector | PK |
| The Max. FS in | PK (dBμV/m) 41.7 | | | $74(dB\mu V/m)$ |
| Restrict Band | AV(dBμV/m) | | Limit | $54(dB\mu V/m)$ |
| 2483.5MHz | | | | |

Test Figure:

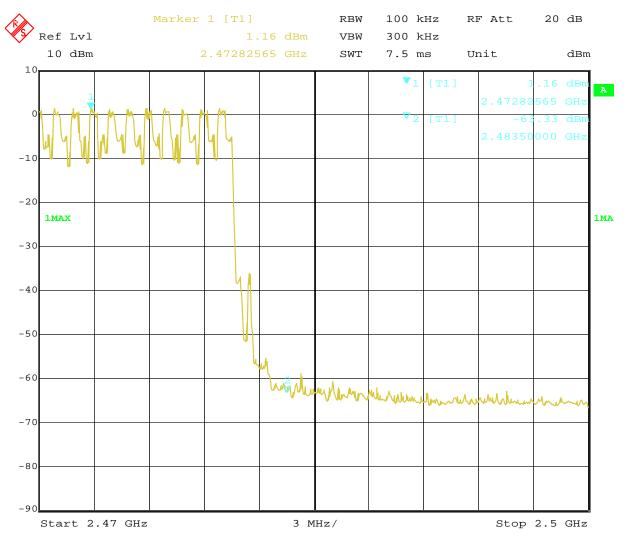

Date: 31.JUL.2015 14:56:51

Date: 2015-08-20




Type of Modulation: 8DPSK

Out of Band Test Result 12.4

| Product: | Smart Mobile phone | | Test Mode: | Low Channel |
|----------------|----------------------|--|---------------|-------------|
| Mode | Keeping Transmitting | | Input Voltage | DC3.7V |
| Temperature | 24 deg. C | | Humidity | 56% RH |
| Test Result: | Pass | | Detector | PK |
| The Max. FS in | PK (dBμV/m) 45.8 | | | 74(dBμV/m) |
| Restrict Band | AV(dBμV/m) | | Limit | 54(dBμV/m) |
| 2390MHz | | | | |

Test Figure:

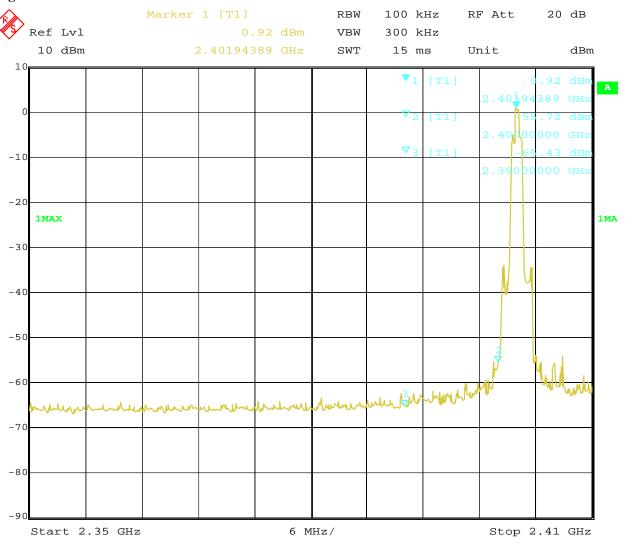

31.JUL.2015 15:29:03 Date:

Date: 2015-08-20




Type of Modulation: 8DPSK

Out of Band Test Result 12.4

| Product: | Smart Mobile phone | | Test Mode: | High Channel |
|----------------|----------------------|--|---------------|-----------------|
| Mode | Keeping Transmitting | | Input Voltage | DC3.7V |
| Temperature | 24 deg. C, | | Humidity | 56% RH |
| Test Result: | Pass | | Detector | PK |
| The Max. FS in | PK (dBμV/m) 42.6 | | | $74(dB\mu V/m)$ |
| Restrict Band | AV(dBμV/m) | | Limit | $54(dB\mu V/m)$ |
| 2483.5MHz | | | | |

Test Figure:

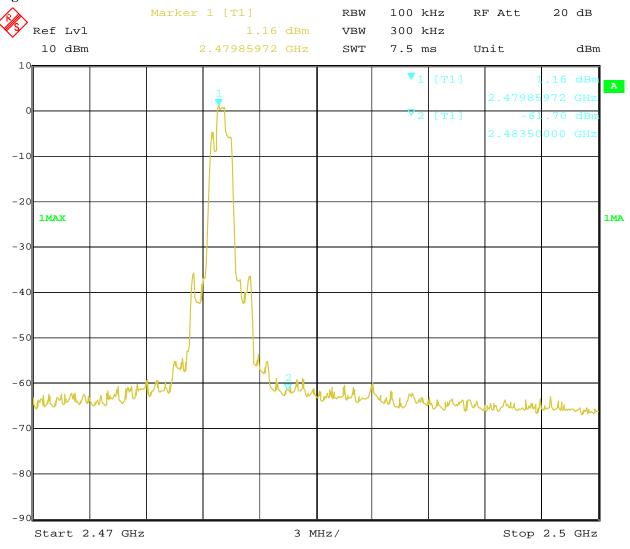

31.JUL.2015 15:30:46 Date:

Date: 2015-08-20




Type of Modulation: 8DPSK

Out of Band Test Result

| Product: | Smart Mobile phone | | Test Mode: | Hopping mode |
|----------------|--------------------|--|---------------|-----------------|
| Mode | Hopping On | | Input Voltage | DC3.7V |
| Temperature | 24 deg. C, | | Humidity | 56% RH |
| Test Result: | Pass | | Detector | PK |
| The Max. FS in | PK (dBμV/m) 43.9 | | | $74(dB\mu V/m)$ |
| Restrict Band | AV(dBμV/m) | | Limit | 54(dBμV/m) |
| 2390MHz | | | | |

Test Figure:

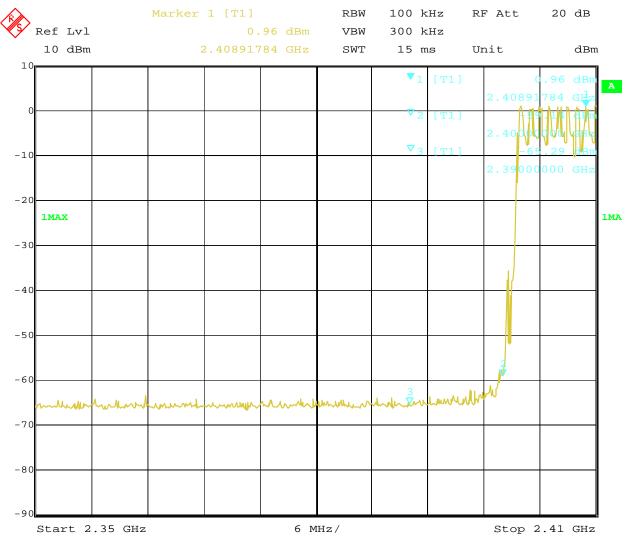

Date: 31.JUL.2015 15:10:04

Date: 2015-08-20




Type of Modulation: 8DPSK

Out of Band Test Result

| Product: | Smart Mobile phone | | Test Mode: | Hopping mode |
|----------------|--------------------|--|---------------|-----------------|
| Mode | Hopping On | | Input Voltage | DC3.7V |
| Temperature | 24 deg. C, | | Humidity | 56% RH |
| Test Result: | Pass | | Detector | PK |
| The Max. FS in | PK (dBμV/m) 41.6 | | | $74(dB\mu V/m)$ |
| Restrict Band | AV(dBμV/m) | | Limit | 54(dBμV/m) |
| 2483.5MHz | | | | |

Test Figure:

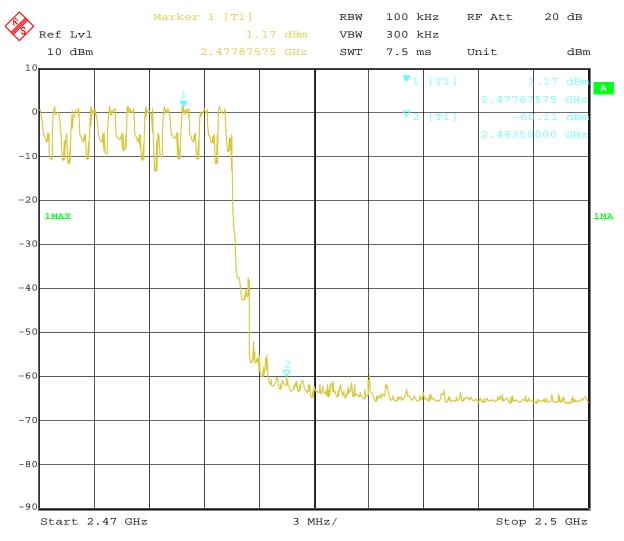

Date: 31.JUL.2015 15:04:53

Date: 2015-08-20



Page 71 of 84

13.0 Antenna Requirement

13.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

13.2 Antenna Connected constructions

Integral antenna used. The maximum Gain of the antennas is 1.6dBi.

Report No: FCC1507166-02 Page 72 of 84

Date: 2015-08-20




14.0 FCC ID/IC Label

FCC ID: 2AFJX-M45

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

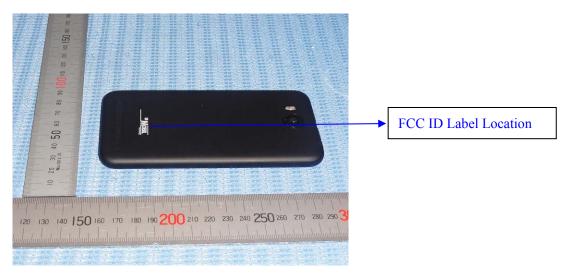

Page 73 of 84


Report No: FCC1507166-02

Date: 2015-08-20



15.0 Photo of testing

Conducted Emission Test Setup:

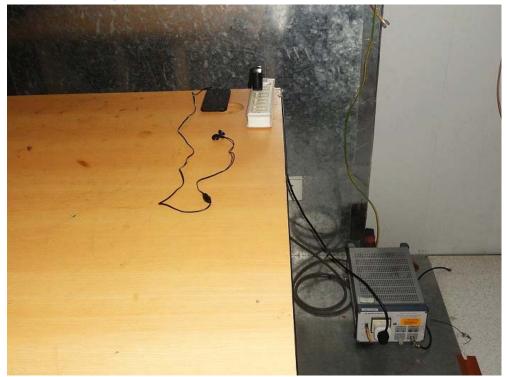

Date: 2015-08-20



Radiated Emission Test Setup:





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2015-08-20



Photographs - EUT

Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Date: 2015-08-20



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2015-08-20



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the property. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Date: 2015-08-20



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the property. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Date: 2015-08-20



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Date: 2015-08-20



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2015-08-20



Inside view





The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the property. discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Date: 2015-08-20



Inside view

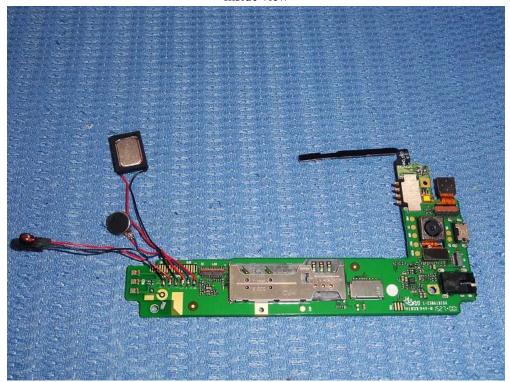

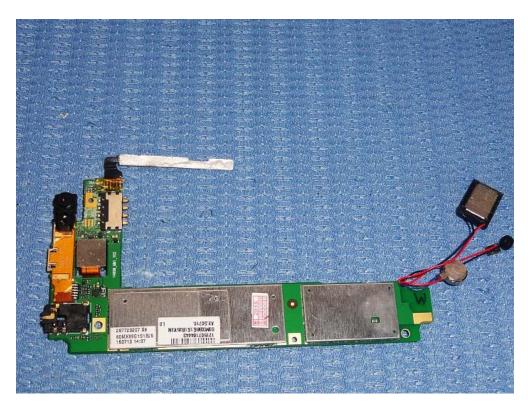

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2015-08-20



Inside view

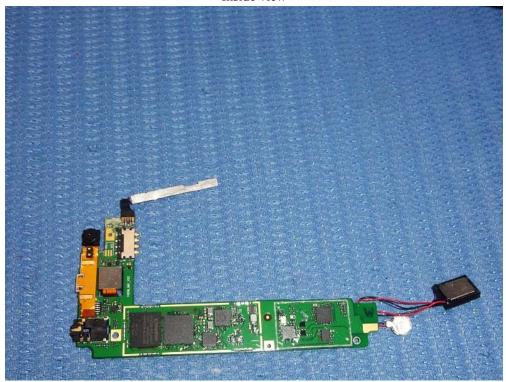

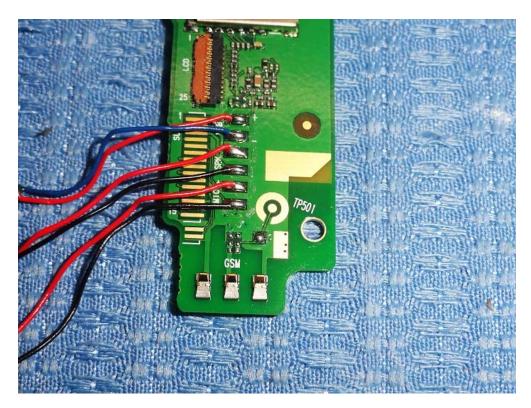

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2015-08-20



Inside view





End of the report

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.