



TEST REPORT

Product Name: OWS Bluetooth Earphones
FCC ID: 2A6V6-Y80
Trademark: N/A
Model Number: Y80
Prepared For: Dongguan Yuyang Innovation Technology Co., Ltd.
Address: Room 201, Building 3, No. 15 Dunlong Road, Tangxia Town, Dongguan City, Guangdong Province
Manufacturer: Dongguan Yuyang Innovation Technology Co., Ltd.
Address: Room 201, Building 3, No. 15 Dunlong Road, Tangxia Town, Dongguan City, Guangdong Province
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Sep. 06, 2024
Sample tested Date: Sep. 06, 2024 to Oct. 17, 2024
Issue Date: Oct. 17, 2024
Report No.: CTB240918004RFX
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is Bluetooth radio test report.

Compiled by:

Reviewed by:

Approved by:

Zhou kui

Arron Liu



Zhou Kui

Arron Liu

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	12
6.1 Block Diagram Of Test Setup	12
6.2 Limit	12
6.3 Test procedure	12
6.4 Test Result	14
7. RADIATED SPURIOUS EMISSION	16
7.1 Block Diagram Of Test Setup	16
7.2 Limit	16
7.3 Test procedure	17
7.4 Test Result	18
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	36
8.1 Block Diagram Of Test Setup	36
8.2 Limit	36
8.3 Test procedure	36
8.4 Test Result	37
9. CONDUCTED PEAK OUTPUT POWER	51
9.1 Block Diagram Of Test Setup	51
9.2 Limit	51
9.3 Test procedure	51
9.4 Test Result	51
10. 20DB OCCUPIED BANDWIDTH	58
10.1 Block Diagram Of Test Setup	58
10.2 Limit	58
10.3 Test procedure	58
10.4 Test Result	58
11. CARRIER FREQUENCIES SEPARATION	65
11.1 Block Diagram Of Test Setup	65
11.2 Limit	65
11.3 Test procedure	65
11.4 Test Result	65
12. HOPPING CHANNEL NUMBER	72
12.1 Block Diagram Of Test Setup	72
12.2 Limit	72
12.3 Test procedure	72
12.4 Test Result	72

13. DWELL TIME	75
13.1 Block Diagram Of Test Setup	75
13.2 Limit	75
13.3 Test procedure	75
13.4 Test Result	75
14. PSEUDORANDOM FREQUENCY	83
14.1 Limit	83
14.2 Test procedure	83
14.3 Test Result	83
15. ANTENNA REQUIREMENT	84
16. EUT TEST SETUP PHOTOGRAPHS	85

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB240918004RFX	Oct. 17, 2024	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(a)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(9KHz-30MHz)	4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	1×10 ⁻⁷
Conducted Emission (150KHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	Y80
Model Description:	N/A
Bluetooth Version:	Bluetooth V5.4
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	Bluetooth: 2402-2480MHz
Max. RF output power:	Bluetooth: 5.3dBm
Type of Modulation:	Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK
Antenna installation:	Bluetooth: Chip antenna
Antenna Gain:	Bluetooth: 1.7dBi
Ratings:	DC 5V charging from adapter DC 3.7V by battery

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Adapter	JIYIN	JY-05100C	/	AE

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz
Receiving (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	3.7V
Normal Temperature($^{\circ}$ C)	23
Low Temperature($^{\circ}$ C)	0
High Temperature($^{\circ}$ C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2025/6/28
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2025/6/28
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2025/6/28
4	Communication test set	R&S	CMW500	108058	V3.5.80	2025/6/28
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/6/28
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2025/6/28
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2025/6/28
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2025/6/28
9	2.4 GHz Filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	/	2025/6/30
10	5 GHz Filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	/	2025/6/30
11	Filter	Xingbo	XBLBQ-DZA 120	190821-1-1	/	2025/6/30
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2025/6/28
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2025/6/28
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/
16	966 chamber	C.R.T.	966	/	/	2027/6/21
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/6/28
18	Amplifier	HP	8447E	2945A02747	/	2025/6/28
19	Amplifier	Agilent	8449B	3008A01838	/	2025/6/28
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/28
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2025/6/28

22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/28
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2025/6/28
26	Amplifier	AEROFLEX	Aeroflex	097	/	2025/6/28
27	Power Metter	KEYSIGHT	N1912AP	N/A	A.05.00	2025/6/28


Continuous disturbance						
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	843 Shield Room	C/ R/ T	843	/	/	2027/6/21
2	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	/	2025/6/30
3	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	/	2025/6/28
4	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428	V4.42.SP3	2025/6/30
5	Coaxial cable	ZDECL	Z302S	18091904	/	2025/6/30
6	ISN	Schwarzbeck	NTFM8158	183	/	2025/6/30
7	Voltage sensor	Schwarzbeck	TK 9420	01189	/	2024/11/16
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/
9	Current Probe	FCC	F-52B	199453	/	2025/5/27
10	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/6/28
11	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/6/28

Radiated emission(No.2 Chamber)						
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2026/11/14
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2026/7/07
3	Broadband Antenna	Schwarzbeck	VULB 9168	1471	/	2025/7/06
4	Amplifier	Agilent	8449B	3008A01838	/	2025/6/30
5	Preamplifier	Schwarzbeck	BBV 9743 B	00500	/	2025/5/23
6	EMI TEST RECEIVER	R&S	ESCI7	100861	/	2024/11/27
7	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/6/28
8	EMI test software	Farad	EZ-EMC	/	Ver. FARAD-3A1+	/
9	Coaxial cable	Rosenberg	8m	/	/	2024/11/27
10	Coaxial cable	Times	2m	/	/	2024/11/27

11	Coaxial cable	Times	2m	/	/	2024/11/27
12	Coaxial cable	Times	1m	/	/	2024/11/27
13	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/29
14	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/6/28
15	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/6/28

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

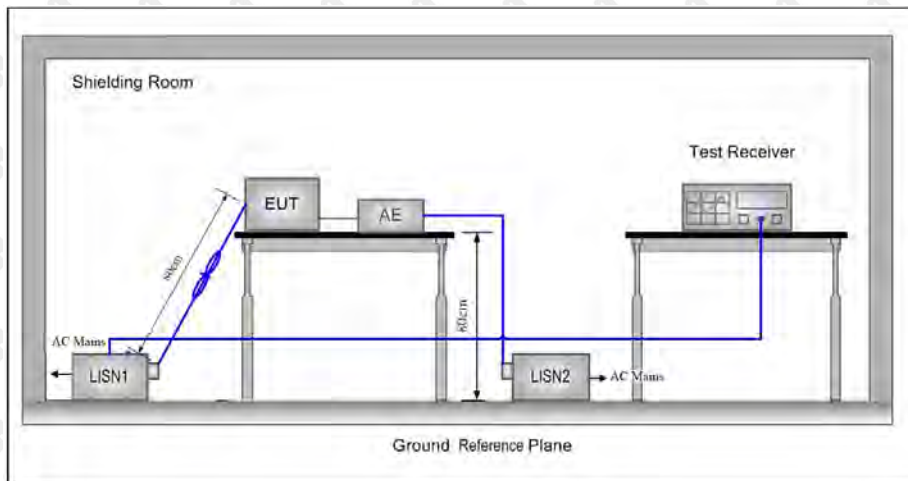

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

6.4 Test Result

L: Worst case-GFSK(low channel)

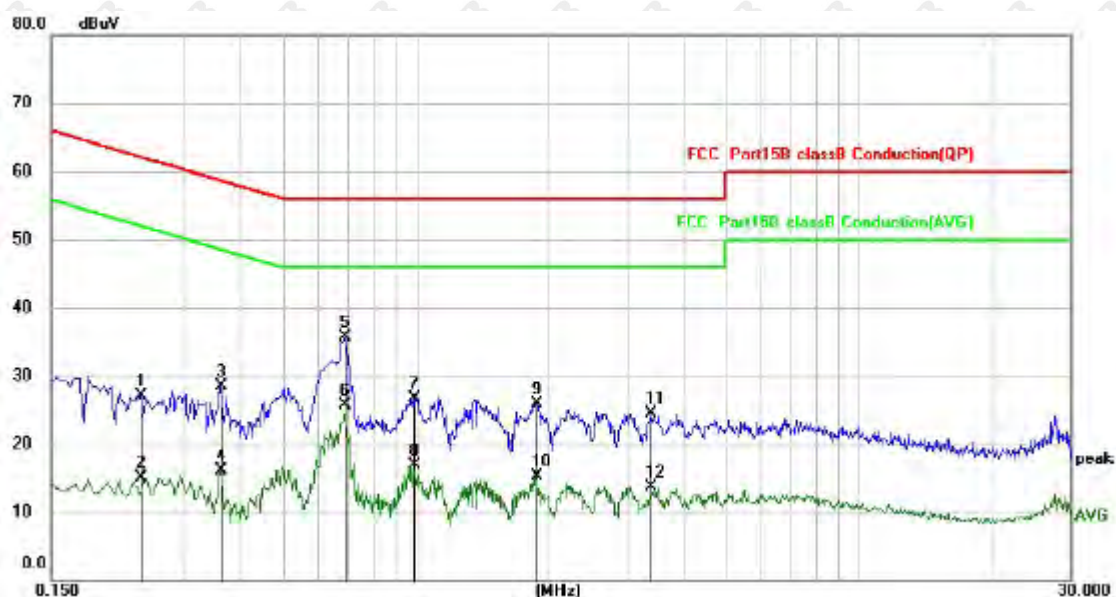


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2380	16.48	10.68	27.16	62.17	-35.01	QP
2		0.2380	4.47	10.68	15.15	52.17	-37.02	AVG
3		0.3620	17.90	10.60	28.50	58.68	-30.18	QP
4		0.3620	5.57	10.60	16.17	48.68	-32.51	AVG
5		0.6900	24.97	10.71	35.68	56.00	-20.32	QP
6	*	0.6900	15.02	10.71	25.73	46.00	-20.27	AVG
7		0.9940	15.73	10.95	26.68	56.00	-29.32	QP
8		0.9940	5.94	10.95	16.89	46.00	-29.11	AVG
9		1.8660	14.48	11.50	25.98	56.00	-30.02	QP
10		1.8660	3.80	11.50	15.30	46.00	-30.70	AVG
11		3.3940	12.56	11.89	24.45	56.00	-31.55	QP
12		3.3940	1.80	11.89	13.69	46.00	-32.31	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N: Worst case-GFSK(low channel)

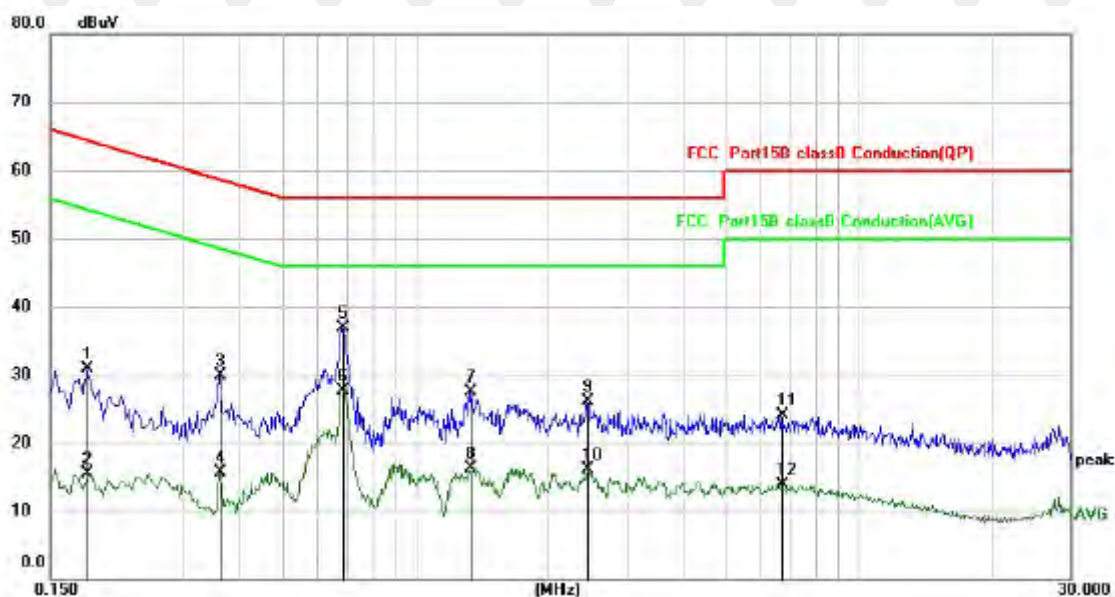

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dBuV	dB	
1		0.1819	20.13	10.78	30.91	64.40	-33.49	QP
2		0.1819	4.75	10.78	15.53	54.40	-38.87	AVG
3		0.3620	19.36	10.60	29.96	58.68	-28.72	QP
4		0.3620	5.14	10.60	15.74	48.68	-32.94	AVG
5		0.6860	26.25	10.70	36.95	56.00	-19.05	QP
6	*	0.6860	17.10	10.70	27.80	46.00	-18.20	AVG
7		1.3260	16.39	11.16	27.55	56.00	-28.45	QP
8		1.3260	5.09	11.16	16.25	46.00	-29.75	AVG
9		2.4460	14.49	11.68	26.17	56.00	-29.83	QP
10		2.4460	4.52	11.68	16.20	46.00	-29.80	AVG
11		6.7020	11.20	12.84	24.04	60.00	-35.96	QP
12		6.7020	1.07	12.84	13.91	50.00	-36.09	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

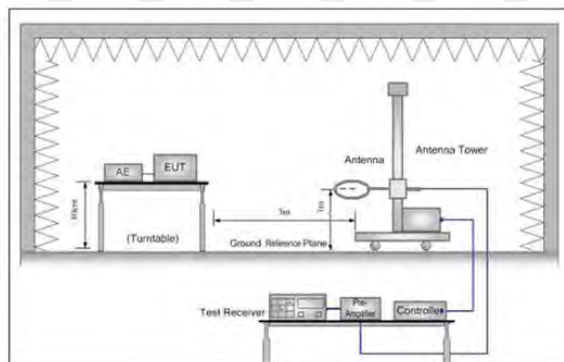


Figure 1. Below 30MHz

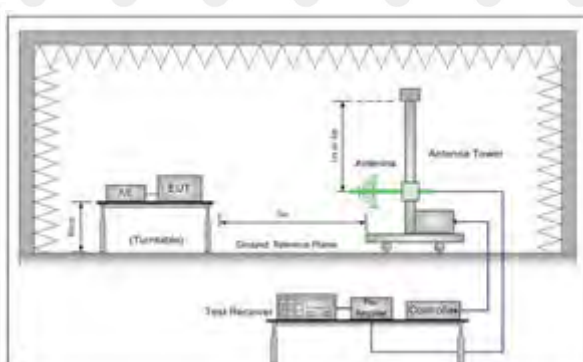


Figure 2. 30MHz to 1GHz

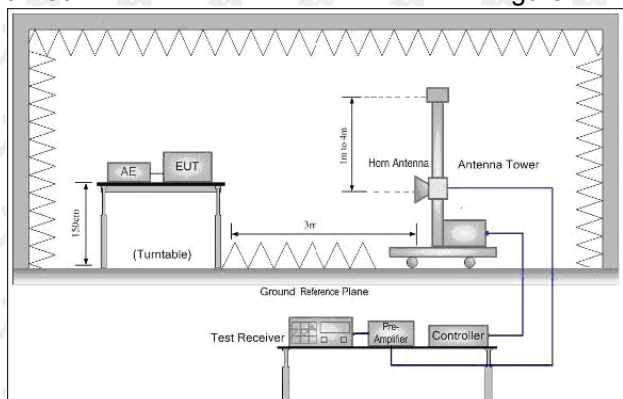


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- Repeat above procedures until all frequencies measured was complete.
- Full battery is used during test

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average


7.4 Test Result

Left ear:

Below 1GHz Test Results:

Antenna polarity: H


Worst case-GFSK(low channel)

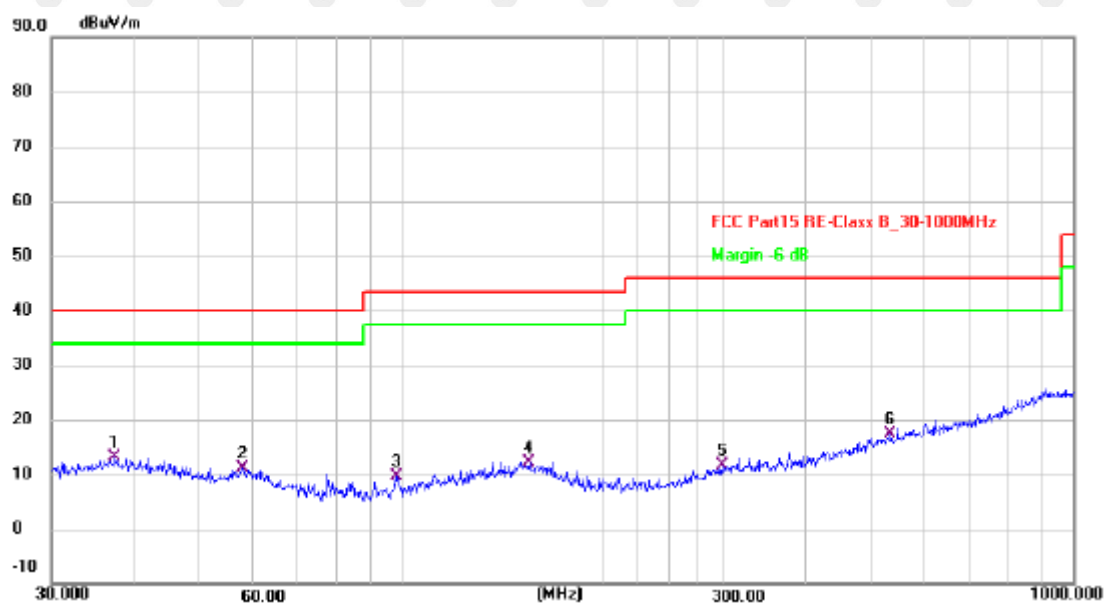

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	37.2855	26.05	-12.93	13.12	40.00	-26.88	QP
2	57.7962	25.68	-14.63	11.05	40.00	-28.95	QP
3	98.1419	27.64	-18.12	9.52	43.50	-33.98	QP
4	154.8204	25.42	-13.21	12.21	43.50	-31.29	QP
5	299.3158	25.52	-13.81	11.71	46.00	-34.29	QP
6	533.8321	25.60	-8.32	17.28	46.00	-28.72	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: V
Worst case-GFSK(low channel)

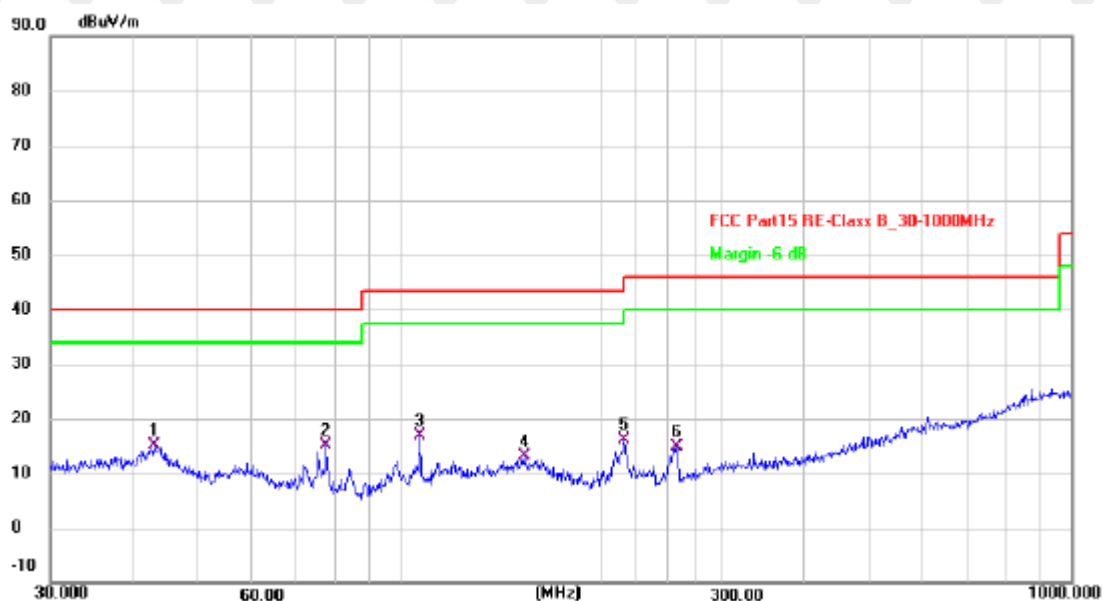

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	42.8998	28.42	-13.17	15.25	40.00	-24.75	QP
2	77.3212	33.45	-18.23	15.22	40.00	-24.78	QP
3	106.7587	34.26	-17.39	16.87	43.50	-26.63	QP
4	152.6641	26.37	-13.17	13.20	43.50	-30.30	QP
5	215.2678	32.97	-16.86	16.11	43.50	-27.39	QP
6	258.3264	30.90	-15.96	14.94	46.00	-31.06	QP


Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Right ear:

Below 1GHz Test Results:

Antenna polarity: H


Worst case-GFSK(low channel)

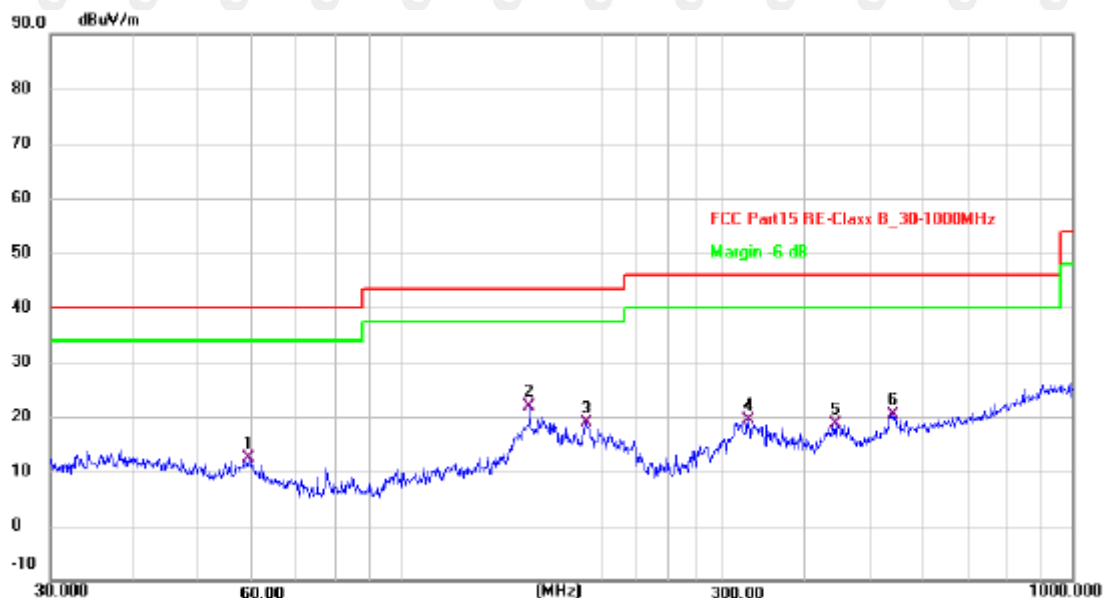

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	59.2325	27.02	-14.64	12.38	40.00	-27.62	QP
2 *	155.3644	35.10	-13.22	21.88	43.50	-21.62	QP
3	189.0743	35.64	-16.87	18.77	43.50	-24.73	QP
4	329.0390	32.72	-13.39	19.33	46.00	-26.67	QP
5	444.8514	29.52	-11.01	18.51	46.00	-27.49	QP
6	539.4775	28.66	-8.16	20.50	46.00	-25.50	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: V
Worst case-GFSK(low channel)

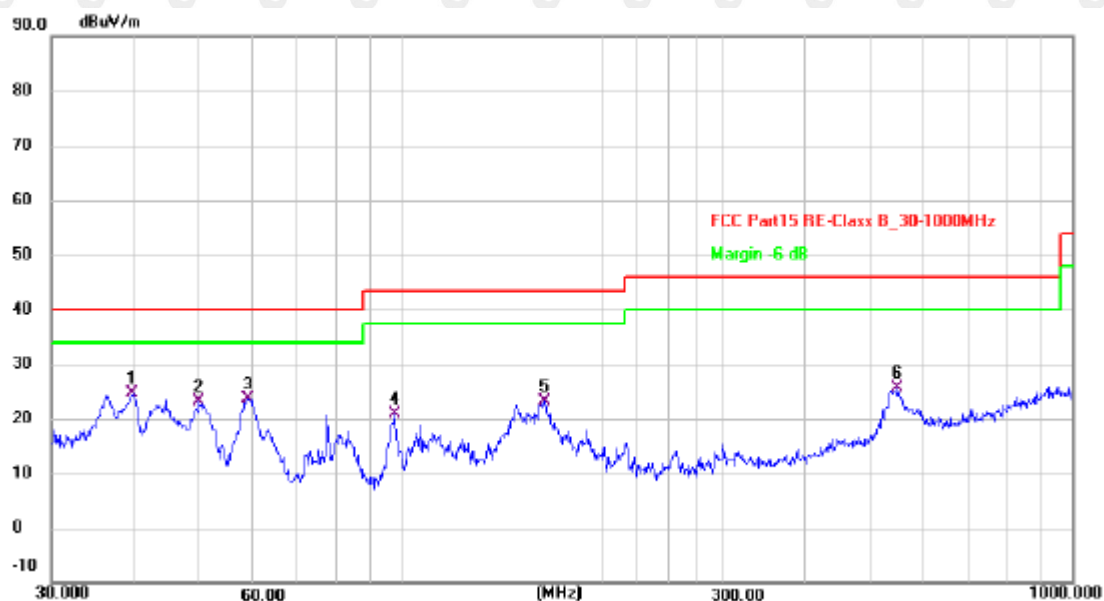

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	39.7146	37.36	-12.63	24.73	40.00	-15.27	QP
2	49.8814	37.62	-14.56	23.06	40.00	-16.94	QP
3	58.8185	38.31	-14.64	23.67	40.00	-16.33	QP
4	97.4560	38.96	-18.14	20.82	43.50	-22.68	QP
5	163.1818	36.71	-13.63	23.08	43.50	-20.42	QP
6	549.0195	33.61	-7.89	25.72	46.00	-20.28	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Left ear:

Above 1 GHz Test Results:

CH Low (2402MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	57.55	-3.65	53.90	74.00	-20.10	peak
4804	50.38	-3.65	46.73	54.00	-7.27	AVG
7206	60.33	-0.95	59.38	74.00	-14.62	peak
7206	40.76	-0.95	39.81	54.00	-14.19	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	58.06	-3.65	54.41	74.00	-19.59	peak
4804	50.66	-3.65	47.01	54.00	-6.99	AVG
7206	60.72	-0.95	59.77	74.00	-14.23	peak
7206	40.16	-0.95	39.21	54.00	-14.79	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH Middle (2441MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	59.07	-3.54	55.53	74.00	-18.47	peak
4882.00	47.40	-3.54	43.86	54.00	-10.14	AVG
7323.00	56.44	-0.81	55.63	74.00	-18.37	peak
7323.00	43.52	-0.81	42.71	54.00	-11.29	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	58.09	-3.54	54.55	74.00	-19.45	peak
4882.00	50.57	-3.54	47.03	54.00	-6.97	AVG
7323.00	56.80	-0.81	55.99	74.00	-18.01	peak
7323.00	43.17	-0.81	42.36	54.00	-11.64	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH High (2480MHz)
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	59.14	-3.43	55.71	74.00	-18.29	peak
4960	47.75	-3.44	44.31	54.00	-9.69	AVG
7440	59.13	-0.77	58.36	74.00	-15.64	peak
7440	40.77	-0.77	40.00	54.00	-14.00	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	57.65	-3.43	54.22	74.00	-19.78	peak
4960	47.92	-3.44	44.48	54.00	-9.52	AVG
7440	59.92	-0.77	59.15	74.00	-14.85	peak
7440	42.53	-0.77	41.76	54.00	-12.24	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

Restricted bands around fundamental frequency (Radiated)

hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	57.56	-5.81	51.75	74.00	-22.25	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.99	-5.84	49.15	74.00	-24.85	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	57.46	-5.81	51.65	74.00	-22.35	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.57	-5.84	50.73	74.00	-23.27	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	55.20	-5.81	49.39	74.00	-24.61	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.42	-6.06	48.36	74.00	-25.64	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.76	-5.81	50.95	74.00	-23.05	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.03	-6.06	47.97	74.00	-26.03	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

NO hopping

Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	55.87	-5.81	50.06	74.00	-23.94	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.41	-5.84	48.57	74.00	-25.43	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	55.65	-5.81	49.84	74.00	-24.16	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.57	-5.84	48.73	74.00	-25.27	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	57.81	-5.81	52.00	74.00	-22.00	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.24	-6.06	48.18	74.00	-25.82	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.57	-5.81	50.76	74.00	-23.24	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	55.18	-6.06	49.12	74.00	-24.88	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Right ear:

Above 1 GHz Test Results:

CH Low (2402MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	59.13	-3.65	55.48	74.00	-18.52	peak
4804	50.35	-3.65	46.70	54.00	-7.30	AVG
7206	61.30	-0.95	60.35	74.00	-13.65	peak
7206	40.75	-0.95	39.80	54.00	-14.20	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	57.35	-3.65	53.70	74.00	-20.30	peak
4804	48.87	-3.65	45.22	54.00	-8.78	AVG
7206	59.47	-0.95	58.52	74.00	-15.48	peak
7206	42.75	-0.95	41.80	54.00	-12.20	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH Middle (2441MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	58.80	-3.54	55.26	74.00	-18.74	peak
4882.00	49.59	-3.54	46.05	54.00	-7.95	AVG
7323.00	57.09	-0.81	56.28	74.00	-17.72	peak
7323.00	44.38	-0.81	43.57	54.00	-10.43	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	57.94	-3.54	54.40	74.00	-19.60	peak
4882.00	51.03	-3.54	47.49	54.00	-6.51	AVG
7323.00	58.63	-0.81	57.82	74.00	-16.18	peak
7323.00	43.44	-0.81	42.63	54.00	-11.37	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH High (2480MHz)
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	57.04	-3.43	53.61	74.00	-20.39	peak
4960	49.44	-3.44	46.00	54.00	-8.00	AVG
7440	61.14	-0.77	60.37	74.00	-13.63	peak
7440	41.22	-0.77	40.45	54.00	-13.55	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	57.08	-3.43	53.65	74.00	-20.35	peak
4960	47.87	-3.44	44.43	54.00	-9.57	AVG
7440	59.56	-0.77	58.79	74.00	-15.21	peak
7440	40.02	-0.77	39.25	54.00	-14.75	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

Restricted bands around fundamental frequency (Radiated)

hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	58.08	-5.81	52.27	74.00	-21.73	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.89	-5.84	50.05	74.00	-23.95	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	55.99	-5.81	50.18	74.00	-23.82	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.15	-5.84	50.31	74.00	-23.69	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	54.27	-5.81	48.46	74.00	-25.54	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.19	-6.06	48.13	74.00	-25.87	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	57.44	-5.81	51.63	74.00	-22.37	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.88	-6.06	47.82	74.00	-26.18	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

NO hopping

Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	54.45	-5.81	48.64	74.00	-25.36	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.83	-5.84	48.99	74.00	-25.01	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	55.18	-5.81	49.37	74.00	-24.63	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	53.76	-5.84	47.92	74.00	-26.08	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	55.22	-5.81	49.41	74.00	-24.59	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	56.18	-6.06	50.12	74.00	-23.88	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						


Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	55.58	-5.81	49.77	74.00	-24.23	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.58	-6.06	47.52	74.00	-26.48	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

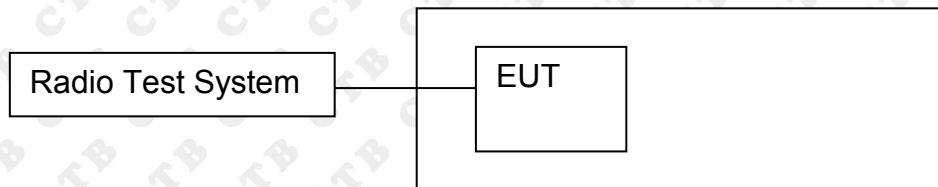

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 Below 30MHz:
 RBW = 100kHz, VBW = 300kHz, Sweep = auto
 Detector function = peak, Trace = max hold
 Above 30MHz:
 RBW = 100KHz, VBW = 300KHz, Sweep = auto
 Detector function = peak, Trace = max hold

8.4 Test Result


Left ear:




GFSK/HCH/
Hop


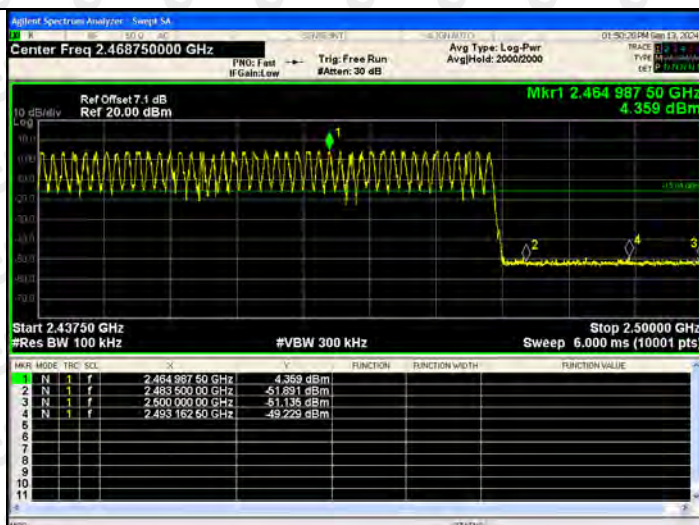


$\pi/4$ DQPSK/LCH/
No Hop

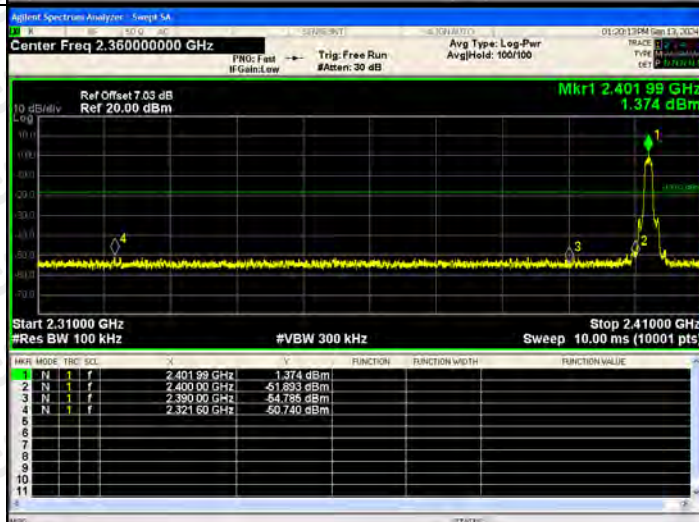


$\pi/4$ DQPSK/LCH/
Hop

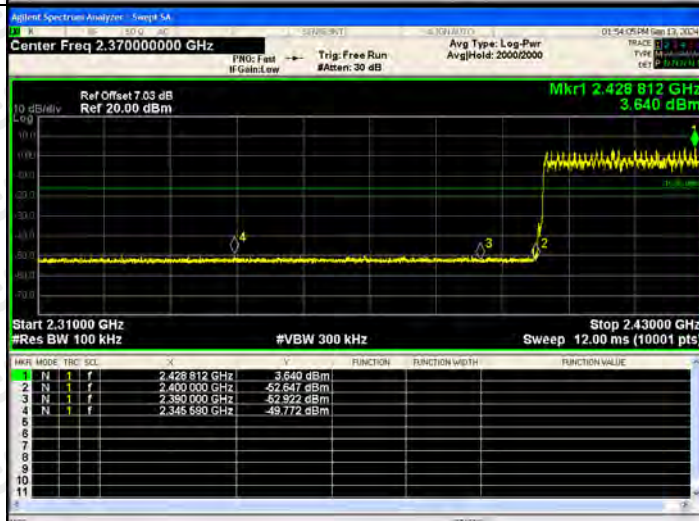

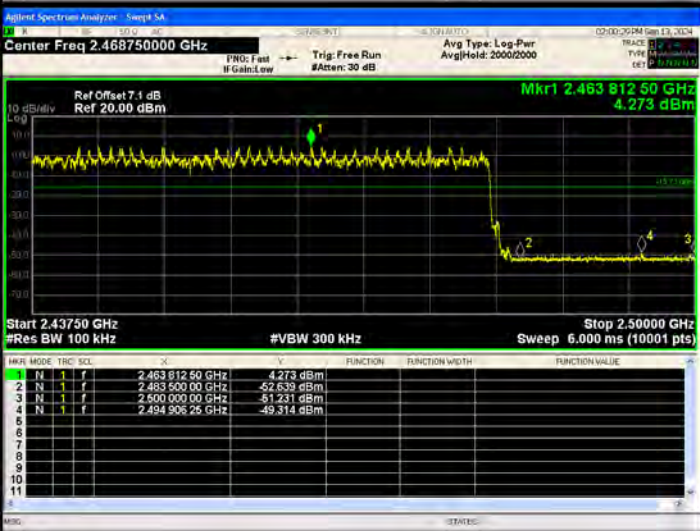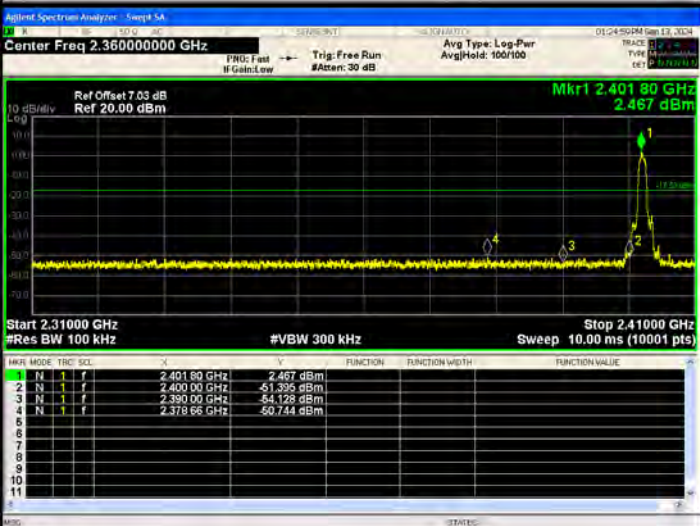$\pi/4$ DQPSK/HCH/ No Hop	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.489000000 GHz Ref Offset 7.1 dB Ref 20.00 dBm Mkr1 2.4798128 GHz 3.925 dBm Start 2.47800 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 2.667 ms (10001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4798128 GHz</td><td>3.925 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.4835000 GHz</td><td>-54.632 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.5000000 GHz</td><td>-52.836 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.4939000 GHz</td><td>-50.646 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4798128 GHz	3.925 dBm				2	N	1	f	2.4835000 GHz	-54.632 dBm				3	N	1	f	2.5000000 GHz	-52.836 dBm				4	N	1	f	2.4939000 GHz	-50.646 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.4798128 GHz	3.925 dBm																																									
2	N	1	f	2.4835000 GHz	-54.632 dBm																																									
3	N	1	f	2.5000000 GHz	-52.836 dBm																																									
4	N	1	f	2.4939000 GHz	-50.646 dBm																																									
$\pi/4$ DQPSK/HCH/ Hop	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.468750000 GHz Ref Offset 7.1 dB Ref 20.00 dBm Mkr1 2.46381250 GHz 4.273 dBm Start 2.43750 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 6.000 ms (10001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.46381250 GHz</td><td>4.273 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.4635000 GHz</td><td>-52.639 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.5000000 GHz</td><td>-51.231 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.4949000 GHz</td><td>-49.314 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.46381250 GHz	4.273 dBm				2	N	1	f	2.4635000 GHz	-52.639 dBm				3	N	1	f	2.5000000 GHz	-51.231 dBm				4	N	1	f	2.4949000 GHz	-49.314 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.46381250 GHz	4.273 dBm																																									
2	N	1	f	2.4635000 GHz	-52.639 dBm																																									
3	N	1	f	2.5000000 GHz	-51.231 dBm																																									
4	N	1	f	2.4949000 GHz	-49.314 dBm																																									
8DPSK/LCH/No Hop	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.360000000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.40180 GHz 2.467 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.41000 GHz Sweep 10.00 ms (10001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.40180 GHz</td><td>2.467 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.40000 GHz</td><td>-51.395 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.39000 GHz</td><td>-54.128 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.37866 GHz</td><td>-50.744 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.40180 GHz	2.467 dBm				2	N	1	f	2.40000 GHz	-51.395 dBm				3	N	1	f	2.39000 GHz	-54.128 dBm				4	N	1	f	2.37866 GHz	-50.744 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.40180 GHz	2.467 dBm																																									
2	N	1	f	2.40000 GHz	-51.395 dBm																																									
3	N	1	f	2.39000 GHz	-54.128 dBm																																									
4	N	1	f	2.37866 GHz	-50.744 dBm																																									


8DPSK
/LCH/Hop

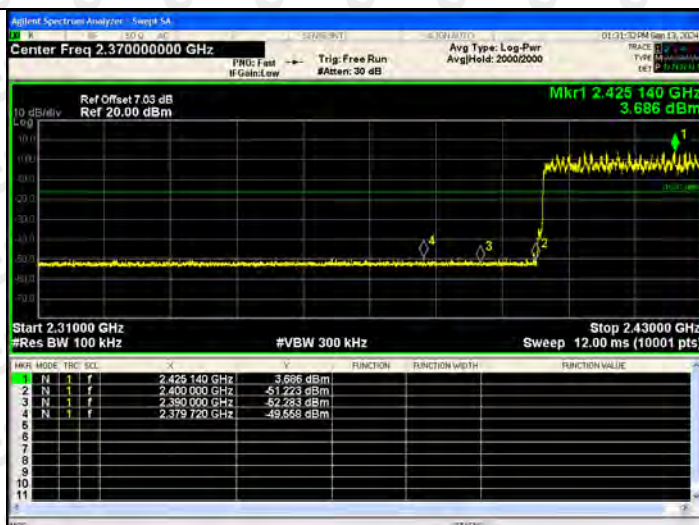

8DPSK /HCH/No
Hop




8DPSK
/HCH/Hop

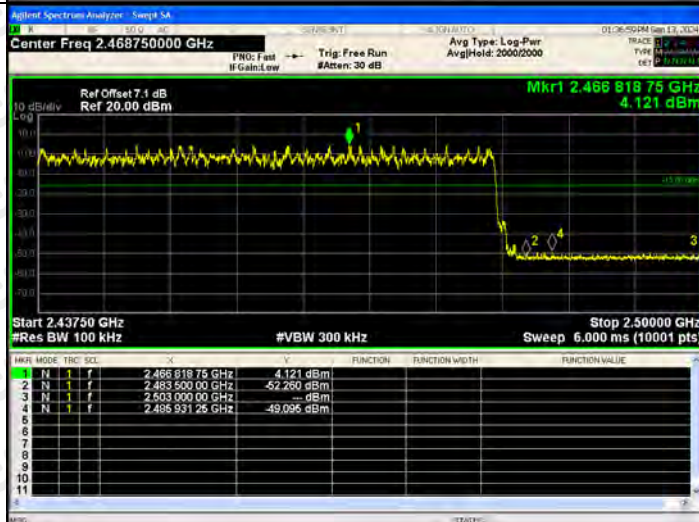


RF Conducted Spurious Emissions Graphs


GFSK/LCH

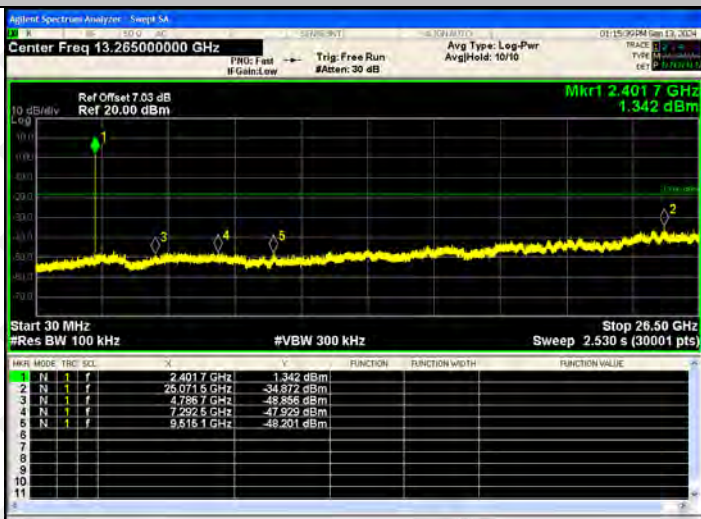

GFSK/MCH

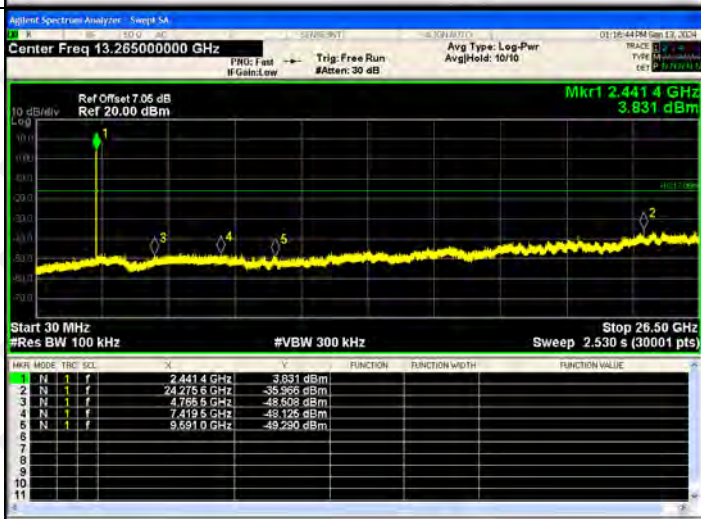


GFSK/HCH

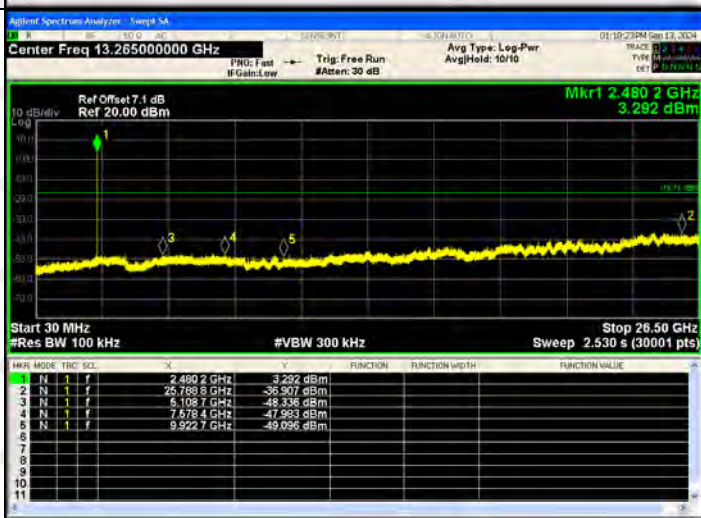


$\pi/4$DQPSK /LCH	
$\pi/4$DQPSK/MCH	
$\pi/4$DQPSK/HCH	


8DPSK /LCH

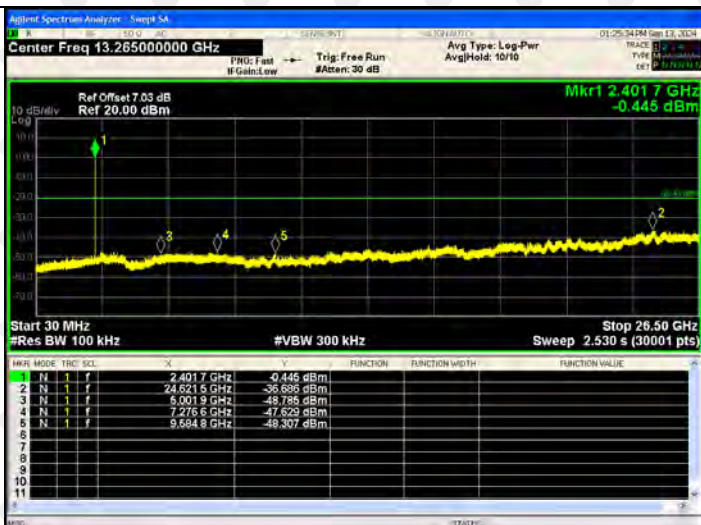

8DPSK /MCH



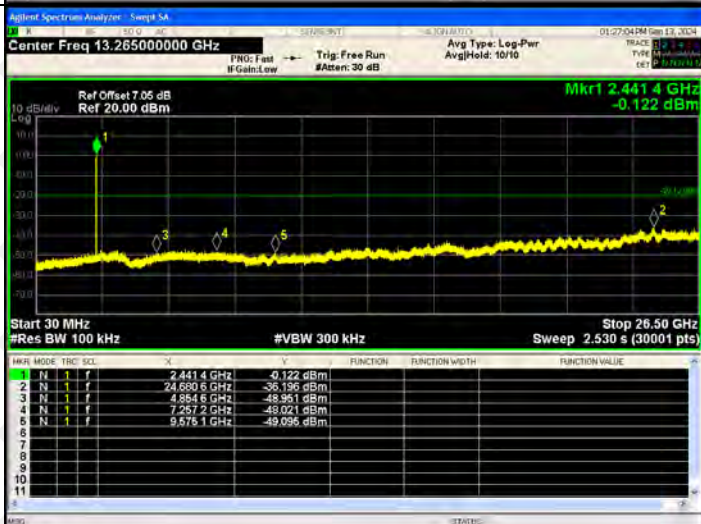


8DPSK /HCH

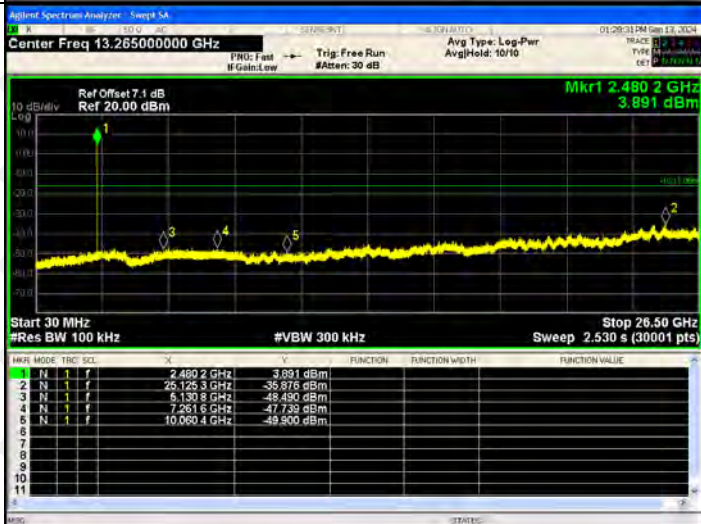


Right ear:


BAND EDGE Graphs

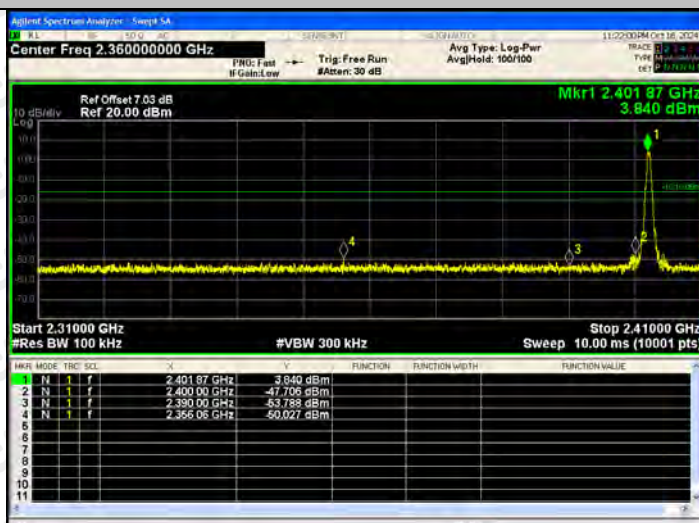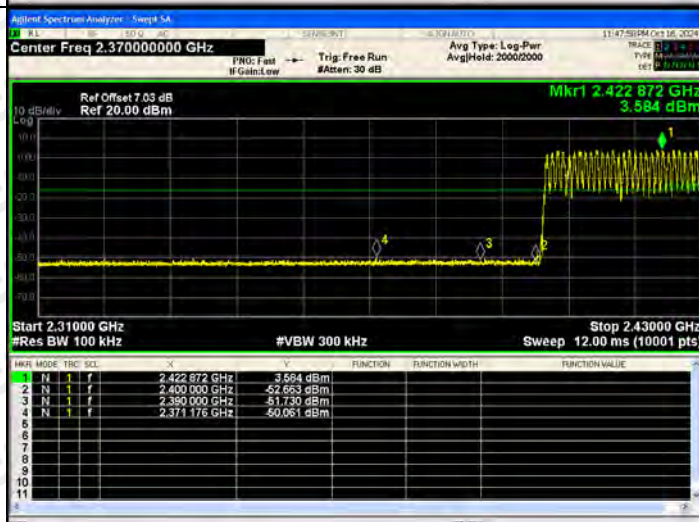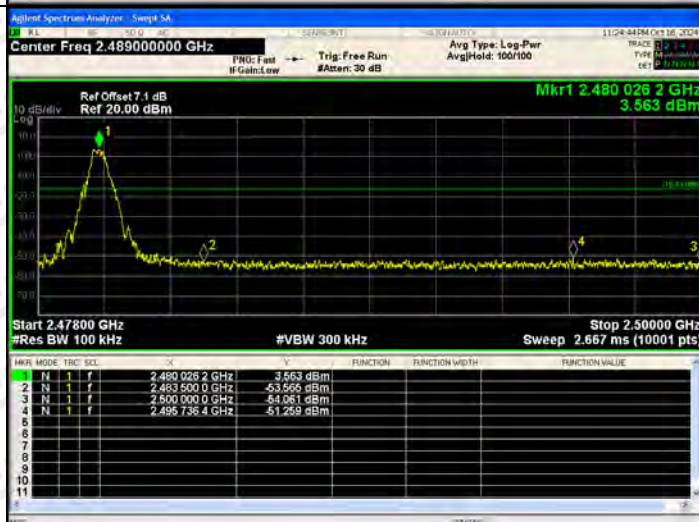GFSK/LCH/
No Hop

GFSK/LCH/
Hop

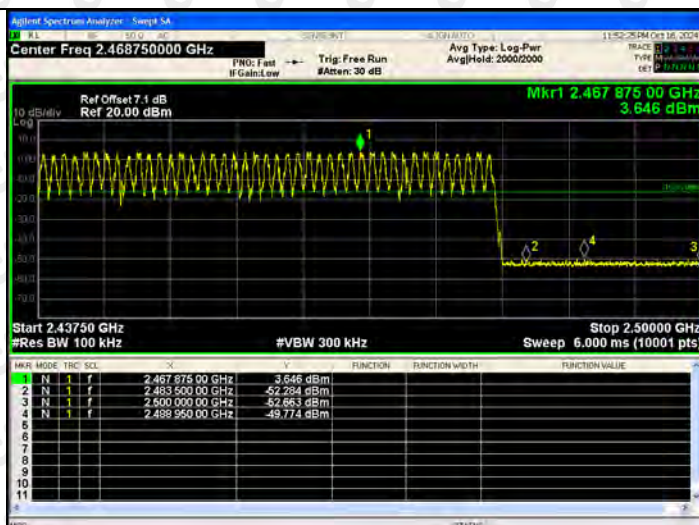GFSK/HCH/
No Hop


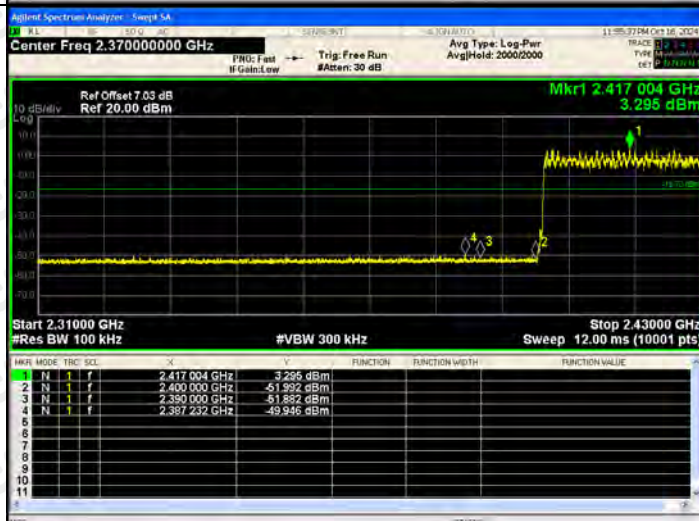
GFSK/HCH/
Hop



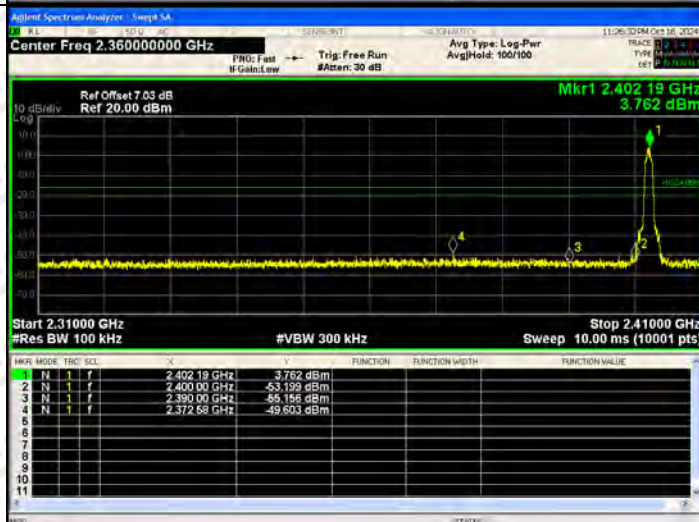


$\pi/4$ DQPSK/LCH/
No Hop




$\pi/4$ DQPSK/LCH/
Hop

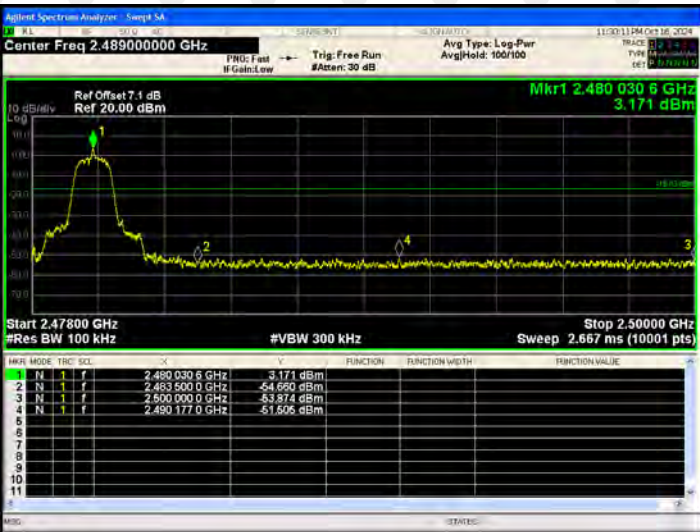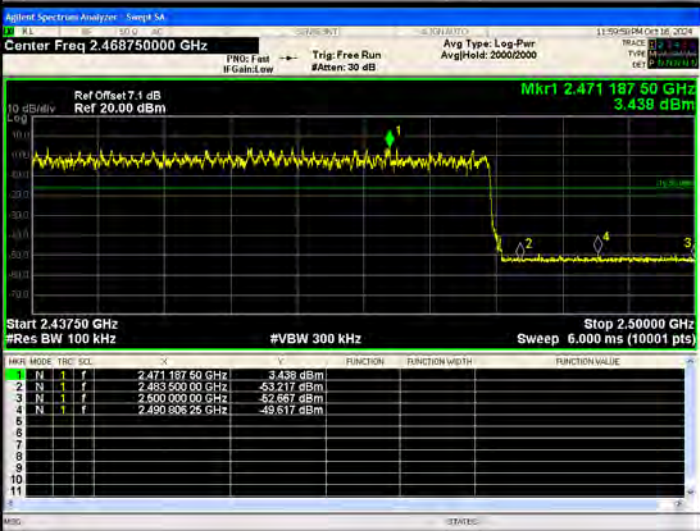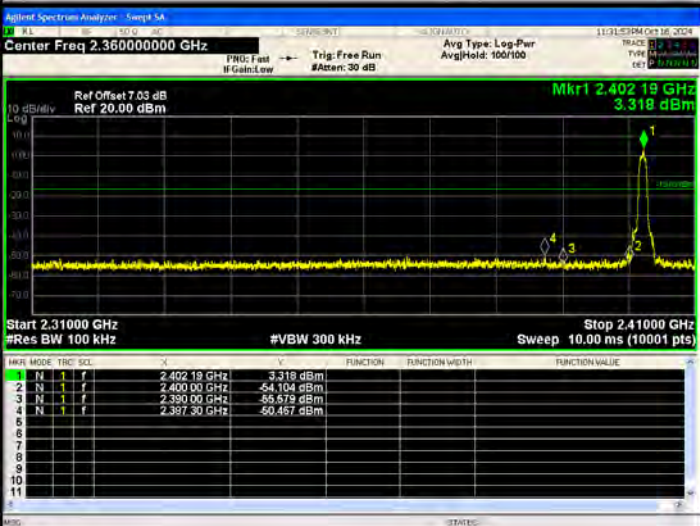


$\pi/4$ DQPSK/HCH/ No Hop	 <table><tr><th>MARK</th><th>MODE</th><th>TRC</th><th>SCL</th><th>F</th><th>V</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4800306 GHz</td><td>3.171 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.4835000 GHz</td><td>-54.690 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.5000000 GHz</td><td>-53.874 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.4901770 GHz</td><td>-51.605 dBm</td><td></td><td></td><td></td></tr></table>	MARK	MODE	TRC	SCL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4800306 GHz	3.171 dBm				2	N	1	f	2.4835000 GHz	-54.690 dBm				3	N	1	f	2.5000000 GHz	-53.874 dBm				4	N	1	f	2.4901770 GHz	-51.605 dBm			
MARK	MODE	TRC	SCL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.4800306 GHz	3.171 dBm																																									
2	N	1	f	2.4835000 GHz	-54.690 dBm																																									
3	N	1	f	2.5000000 GHz	-53.874 dBm																																									
4	N	1	f	2.4901770 GHz	-51.605 dBm																																									
$\pi/4$ DQPSK/HCH/ Hop	 <table><tr><th>MARK</th><th>MODE</th><th>TRC</th><th>SCL</th><th>F</th><th>V</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.47118750 GHz</td><td>3.438 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.4835000 GHz</td><td>-53.217 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.5000000 GHz</td><td>-52.687 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.49080625 GHz</td><td>-49.517 dBm</td><td></td><td></td><td></td></tr></table>	MARK	MODE	TRC	SCL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.47118750 GHz	3.438 dBm				2	N	1	f	2.4835000 GHz	-53.217 dBm				3	N	1	f	2.5000000 GHz	-52.687 dBm				4	N	1	f	2.49080625 GHz	-49.517 dBm			
MARK	MODE	TRC	SCL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.47118750 GHz	3.438 dBm																																									
2	N	1	f	2.4835000 GHz	-53.217 dBm																																									
3	N	1	f	2.5000000 GHz	-52.687 dBm																																									
4	N	1	f	2.49080625 GHz	-49.517 dBm																																									
8DPSK/LCH/No Hop	 <table><tr><th>MARK</th><th>MODE</th><th>TRC</th><th>SCL</th><th>F</th><th>V</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.40219 GHz</td><td>3.318 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.40000 GHz</td><td>-54.104 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.39000 GHz</td><td>-55.579 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.39730 GHz</td><td>-50.457 dBm</td><td></td><td></td><td></td></tr></table>	MARK	MODE	TRC	SCL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.40219 GHz	3.318 dBm				2	N	1	f	2.40000 GHz	-54.104 dBm				3	N	1	f	2.39000 GHz	-55.579 dBm				4	N	1	f	2.39730 GHz	-50.457 dBm			
MARK	MODE	TRC	SCL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.40219 GHz	3.318 dBm																																									
2	N	1	f	2.40000 GHz	-54.104 dBm																																									
3	N	1	f	2.39000 GHz	-55.579 dBm																																									
4	N	1	f	2.39730 GHz	-50.457 dBm																																									

8DPSK
/LCH/Hop

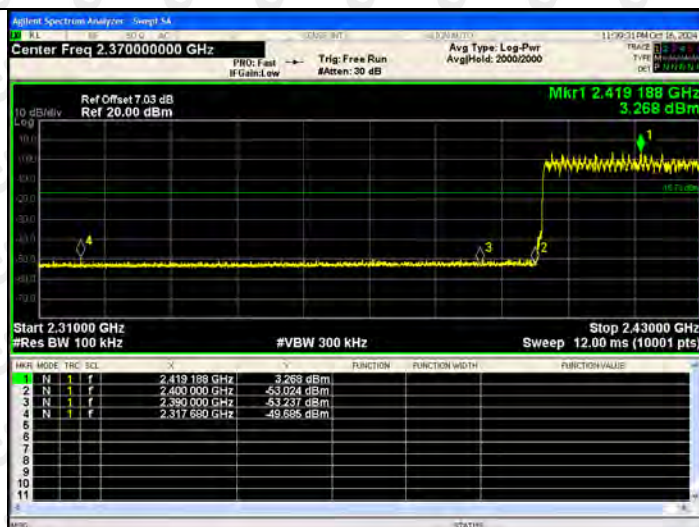

8DPSK /HCH/No
Hop

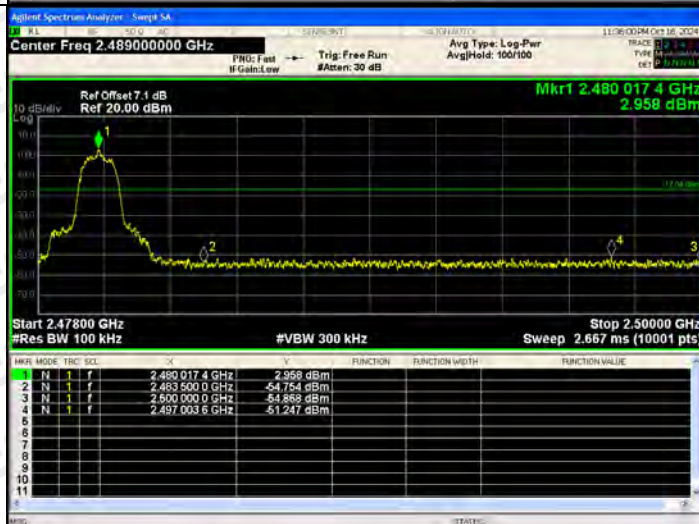


8DPSK
/HCH/Hop




RF Conducted Spurious Emissions Graphs


GFSK/LCH

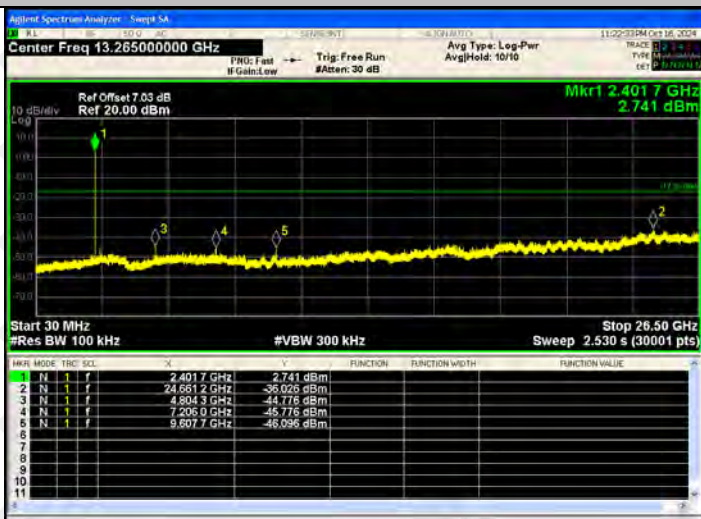

GFSK/MCH

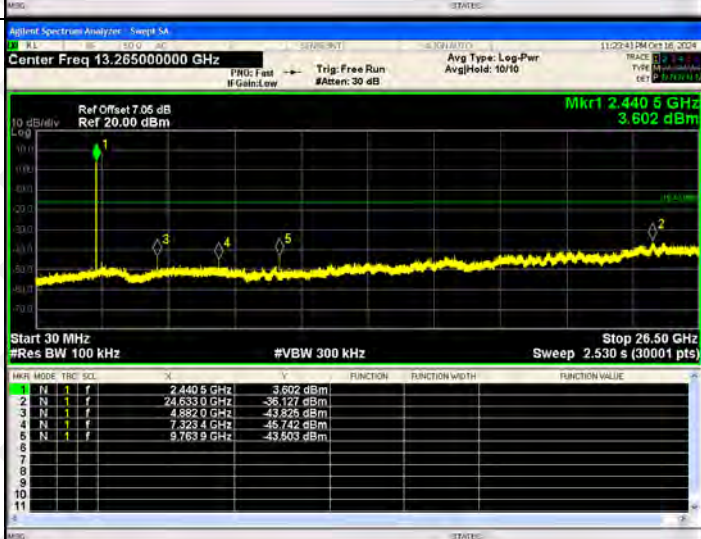


GFSK/HCH

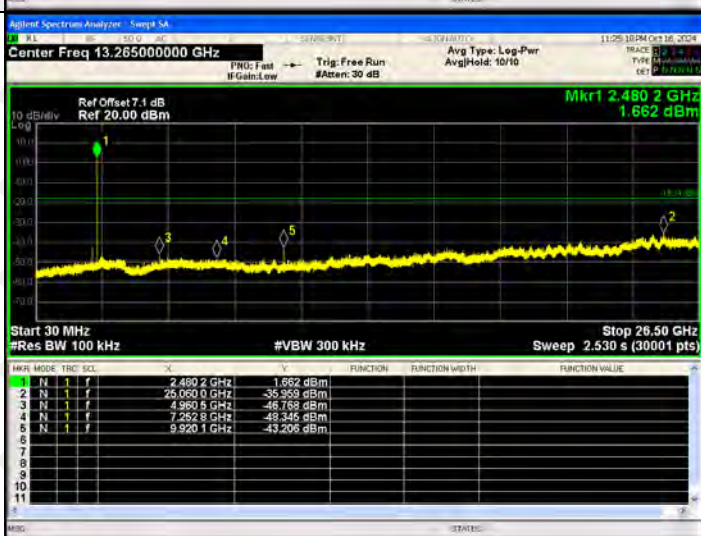


$\pi/4$ DQPSK /LCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.4017 GHz 1.773 dBm Start 30 MHz #Res BW 100 kHz Stop 26.50 GHz #VBW 300 kHz Sweep 2.530 s (30001 pts) <table><thead><tr><th>MARK</th><th>MODE</th><th>TRIG</th><th>SCN</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4017 GHz</td><td>1.773 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.6815 GHz</td><td>-35.232 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.8043 GHz</td><td>-44.749 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.2060 GHz</td><td>-45.531 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.6077 GHz</td><td>-45.574 dBm</td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>	MARK	MODE	TRIG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4017 GHz	1.773 dBm				2	N	1	f	24.6815 GHz	-35.232 dBm				3	N	1	f	4.8043 GHz	-44.749 dBm				4	N	1	f	7.2060 GHz	-45.531 dBm				5	N	1	f	9.6077 GHz	-45.574 dBm				6									7									8									9									10									11								
MARK	MODE	TRIG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.4017 GHz	1.773 dBm																																																																																																								
2	N	1	f	24.6815 GHz	-35.232 dBm																																																																																																								
3	N	1	f	4.8043 GHz	-44.749 dBm																																																																																																								
4	N	1	f	7.2060 GHz	-45.531 dBm																																																																																																								
5	N	1	f	9.6077 GHz	-45.574 dBm																																																																																																								
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
$\pi/4$ DQPSK/MCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.05 dB Ref 20.00 dBm Mkr1 2.4405 GHz -0.432 dBm Start 30 MHz #Res BW 100 kHz Stop 26.50 GHz #VBW 300 kHz Sweep 2.530 s (30001 pts) <table><thead><tr><th>MARK</th><th>MODE</th><th>TRIG</th><th>SCN</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4405 GHz</td><td>-0.432 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>25.0553 GHz</td><td>-35.438 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.8820 GHz</td><td>-47.504 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.1248 GHz</td><td>-48.029 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.7639 GHz</td><td>-43.526 dBm</td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>	MARK	MODE	TRIG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4405 GHz	-0.432 dBm				2	N	1	f	25.0553 GHz	-35.438 dBm				3	N	1	f	4.8820 GHz	-47.504 dBm				4	N	1	f	7.1248 GHz	-48.029 dBm				5	N	1	f	9.7639 GHz	-43.526 dBm				6									7									8									9									10									11								
MARK	MODE	TRIG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.4405 GHz	-0.432 dBm																																																																																																								
2	N	1	f	25.0553 GHz	-35.438 dBm																																																																																																								
3	N	1	f	4.8820 GHz	-47.504 dBm																																																																																																								
4	N	1	f	7.1248 GHz	-48.029 dBm																																																																																																								
5	N	1	f	9.7639 GHz	-43.526 dBm																																																																																																								
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
$\pi/4$ DQPSK/HCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.1 dB Ref 20.00 dBm Mkr1 2.4802 GHz -1.023 dBm Start 30 MHz #Res BW 100 kHz Stop 26.50 GHz #VBW 300 kHz Sweep 2.530 s (30001 pts) <table><thead><tr><th>MARK</th><th>MODE</th><th>TRIG</th><th>SCN</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4802 GHz</td><td>-1.023 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.1209 GHz</td><td>-36.289 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.9605 GHz</td><td>-46.347 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.4389 GHz</td><td>-45.499 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.9201 GHz</td><td>-44.174 dBm</td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>	MARK	MODE	TRIG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4802 GHz	-1.023 dBm				2	N	1	f	24.1209 GHz	-36.289 dBm				3	N	1	f	4.9605 GHz	-46.347 dBm				4	N	1	f	7.4389 GHz	-45.499 dBm				5	N	1	f	9.9201 GHz	-44.174 dBm				6									7									8									9									10									11								
MARK	MODE	TRIG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.4802 GHz	-1.023 dBm																																																																																																								
2	N	1	f	24.1209 GHz	-36.289 dBm																																																																																																								
3	N	1	f	4.9605 GHz	-46.347 dBm																																																																																																								
4	N	1	f	7.4389 GHz	-45.499 dBm																																																																																																								
5	N	1	f	9.9201 GHz	-44.174 dBm																																																																																																								
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													


8DPSK /LCH

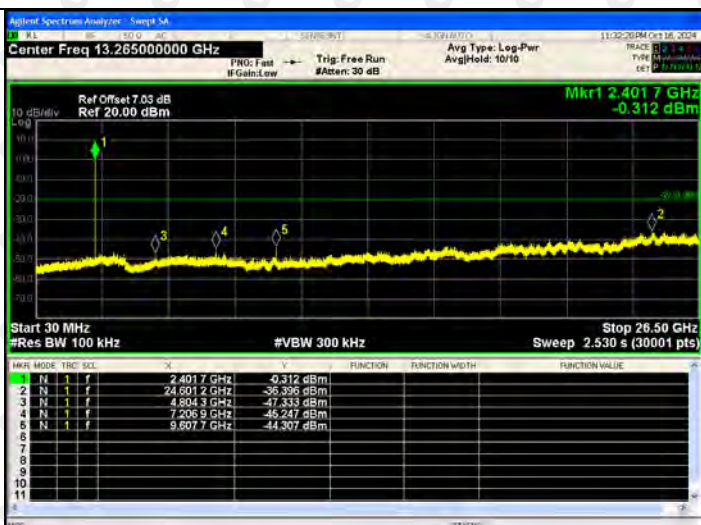

8DPSK /MCH

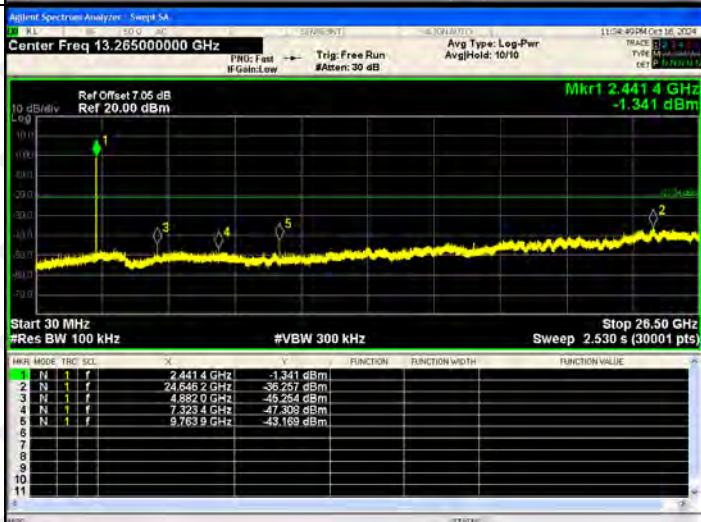


8DPSK /HCH

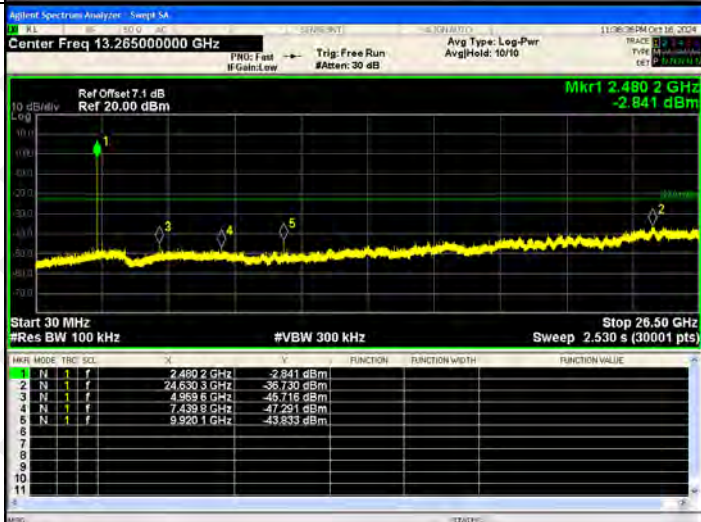

9. COUDUCTED PEAK OUTPUT POWER

9.1 Block Diagram Of Test Setup

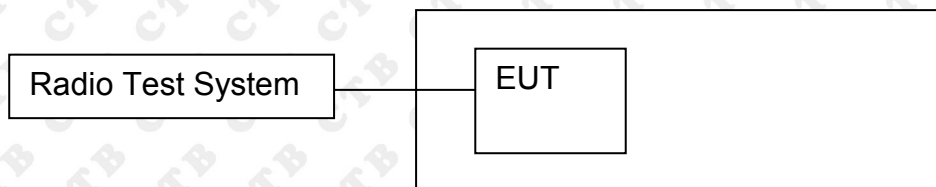

9.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

Left ear:


Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
EDR mode (GFSK)	LCH	3.406	20.97	PASS
	MCH	4.288	20.97	PASS
	HCH	4.272	20.97	PASS
EDR mode ($\pi/4$ DQPSK)	LCH	4.267	20.97	PASS
	MCH	4.902	20.97	PASS
	HCH	4.96	20.97	PASS
EDR mode (8DPSK)	LCH	4.618	20.97	PASS
	MCH	5.141	20.97	PASS
	HCH	5.3	20.97	PASS

Right ear:

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
EDR mode (GFSK)	LCH	3.978	20.97	PASS
	MCH	3.853	20.97	PASS
	HCH	3.804	20.97	PASS
EDR mode ($\pi/4$ DQPSK)	LCH	4.704	20.97	PASS
	MCH	4.245	20.97	PASS
	HCH	4.089	20.97	PASS
EDR mode (8DPSK)	LCH	4.666	20.97	PASS
	MCH	4.502	20.97	PASS
	HCH	4.328	20.97	PASS

Left ear:


Test Graph:

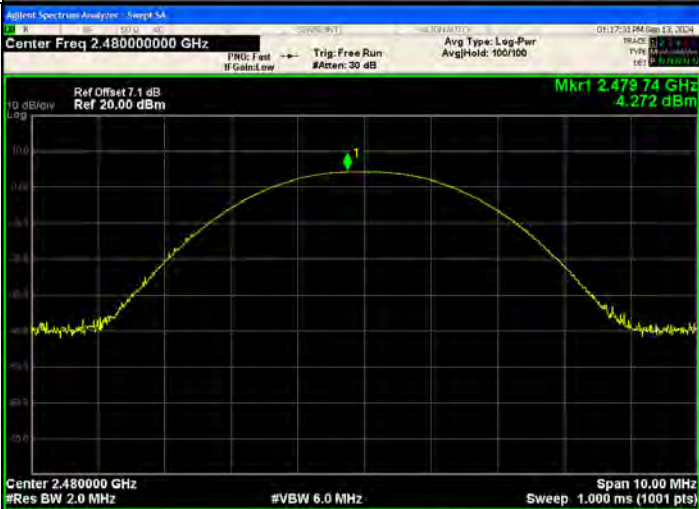Graphs	
GFSK/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.402000000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.40216 GHz 3.406 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
GFSK/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.441000000 GHz Ref Offset 7.05 dB Ref 20.00 dBm Mkr1 2.44111 GHz 4.288 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
GFSK/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.480000000 GHz Ref Offset 7.1 dB Ref 20.00 dBm Mkr1 2.47974 GHz 4.272 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)

$\pi/4$ DQPSK/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.402000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.402 03 GHz 4.267 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
$\pi/4$ DQPSK/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.441000 GHz Ref Offset 7.05 dB Ref 20.00 dBm Mkr1 2.440 98 GHz 4.902 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
$\pi/4$ DQPSK/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.480000 GHz Ref Offset 7.1 dB Ref 20.00 dBm Mkr1 2.480 10 GHz 4.980 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)

8DPSK/LCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.40200000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.40199 GHz 4.818 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
8DPSK /MCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.44100000 GHz Ref Offset 7.05 dB Ref 20.00 dBm Mkr1 2.44095 GHz 5.141 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
8DPSK /HCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.48000000 GHz Ref Offset 7.1 dB Ref 20.00 dBm Mkr1 2.47996 GHz 5.300 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)

Right ear:
Test Graph:

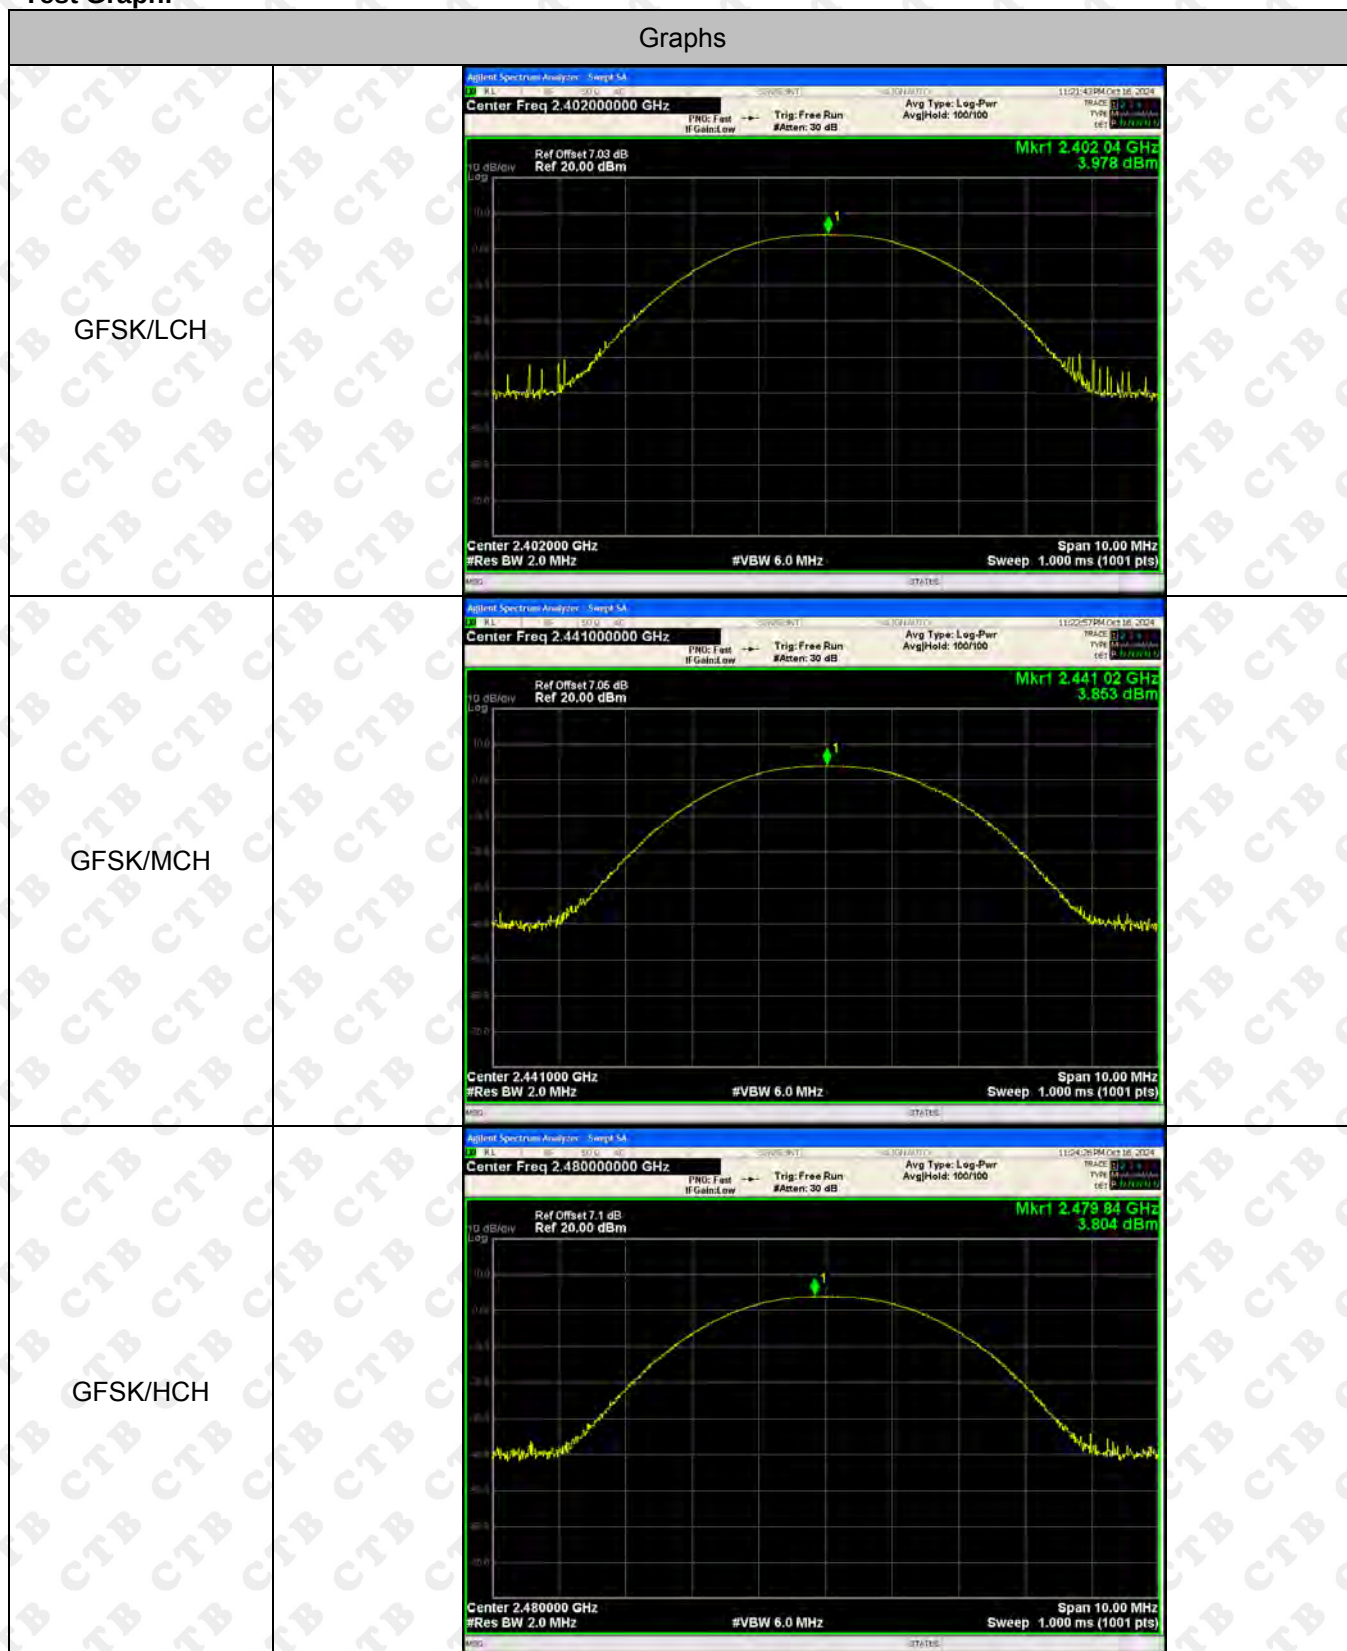


$\pi/4$ DQPSK/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.402000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.401 89 GHz 4.704 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
$\pi/4$ DQPSK/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.441000 GHz Ref Offset 7.05 dB Ref 20.00 dBm Mkr1 2.440 92 GHz 4.245 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
$\pi/4$ DQPSK/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.480000 GHz Ref Offset 7.1 dB Ref 20.00 dBm Mkr1 2.480 19 GHz 4.089 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)

8DPSK/LCH	 Agilent Spectrum Analyzer - Sweep 54 Center Freq: 2.40200000 GHz Ref Offset: 7.03 dB Ref: 20.00 dBm Mkr1: 2.40202 GHz 4.686 dBm Center: 2.402000 GHz #Res BW: 2.0 MHz #VBW: 6.0 MHz Span: 10.00 MHz Sweep: 1.000 ms (1001 pts)
8DPSK /MCH	 Agilent Spectrum Analyzer - Sweep 54 Center Freq: 2.44100000 GHz Ref Offset: 7.05 dB Ref: 20.00 dBm Mkr1: 2.44098 GHz 4.502 dBm Center: 2.441000 GHz #Res BW: 2.0 MHz #VBW: 6.0 MHz Span: 10.00 MHz Sweep: 1.000 ms (1001 pts)
8DPSK /HCH	 Agilent Spectrum Analyzer - Sweep 54 Center Freq: 2.48000000 GHz Ref Offset: 7.1 dB Ref: 20.00 dBm Mkr1: 2.47999 GHz 4.328 dBm Center: 2.480000 GHz #Res BW: 2.0 MHz #VBW: 6.0 MHz Span: 10.00 MHz Sweep: 1.000 ms (1001 pts)

10. 20DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

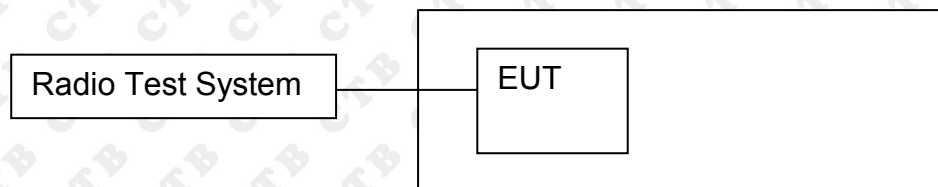

10.2 Limit

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mw.

10.3 Test procedure

1. Rem1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

Left ear:

Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	0.87	PASS
	Mid channel	0.866	PASS
	High channel	0.874	PASS
$\pi/4$ DQPSK	Low channel	1.27	PASS
	Mid channel	1.221	PASS
	High channel	1.274	PASS
8DPSK	Low channel	1.301	PASS
	Mid channel	1.215	PASS
	High channel	1.25	PASS

Right ear:

Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	0.875	PASS
	Mid channel	0.87	PASS
	High channel	0.839	PASS
$\pi/4$ DQPSK	Low channel	1.315	PASS
	Mid channel	1.328	PASS
	High channel	1.317	PASS
8DPSK	Low channel	1.284	PASS
	Mid channel	1.304	PASS
	High channel	1.278	PASS

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

Left ear:
Test Graph:

GFSK Low channel	
GFSK Mid channel	
GFSK High channel	


$\pi/4$-DQPSK Low channel	
$\pi/4$-DQPSK Mid channel	
$\pi/4$-DQPSK High channel	

8DPSK Low channel	
8DPSK Mid channel	
8DPSK High channel	

Right ear:
Test Graph:


GFSK Low channel	
GFSK Mid channel	
GFSK High channel	

$\pi/4$-DQPSK Low channel	
$\pi/4$-DQPSK Mid channel	
$\pi/4$-DQPSK High channel	

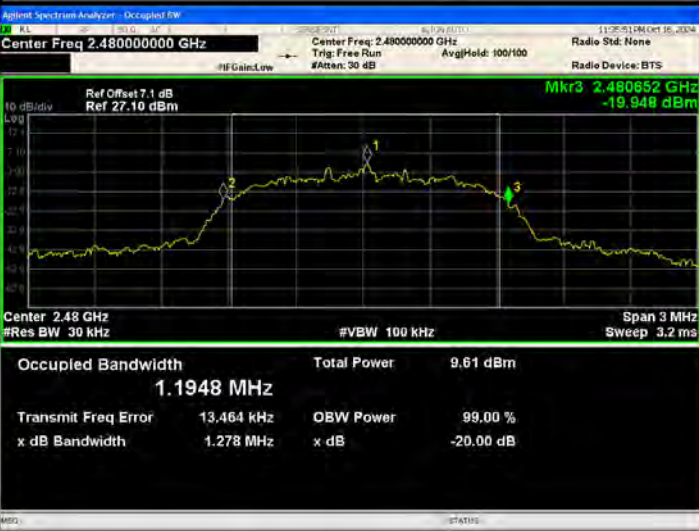8DPSK Low channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.402000000 GHz Ref Offset: 7.03 dB Ref: 27.03 dBm Occupied Bandwidth: 1.1805 MHz Total Power: 10.1 dBm Transmit Freq Error: 18.319 kHz x dB Bandwidth: 1.284 MHz OBW Power: 99.00 % x dB: -20.00 dB
8DPSK Mid channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.441000000 GHz Ref Offset: 7.05 dB Ref: 27.05 dBm Occupied Bandwidth: 1.1749 MHz Total Power: 9.82 dBm Transmit Freq Error: 25.452 kHz x dB Bandwidth: 1.304 MHz OBW Power: 99.00 % x dB: -20.00 dB
8DPSK High channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.480000000 GHz Ref Offset: 7.1 dB Ref: 27.10 dBm Occupied Bandwidth: 1.1948 MHz Total Power: 9.61 dBm Transmit Freq Error: 13.464 kHz x dB Bandwidth: 1.278 MHz OBW Power: 99.00 % x dB: -20.00 dB

11. CARRIER FREQUENCIES SEPARATION

11.1 Block Diagram Of Test Setup

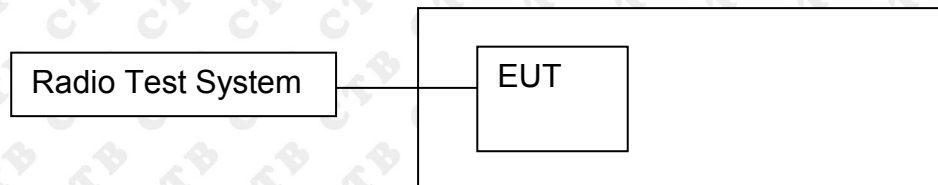

11.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

11.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz, Span = 2MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

11.4 Test Result

Left ear:

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(2/3 of the 20dB bandwidth MHz)	Verdict
GFSK	LCH	0.998	0.580	PASS
GFSK	MCH	1.000	0.577	PASS
GFSK	HCH	0.996	0.583	PASS
$\pi/4$ DQPSK	LCH	0.996	0.847	PASS
$\pi/4$ DQPSK	MCH	1.002	0.814	PASS
$\pi/4$ DQPSK	HCH	0.994	0.849	PASS
8DPSK	LCH	1.000	0.867	PASS
8DPSK	MCH	1.004	0.810	PASS
8DPSK	HCH	1.000	0.833	PASS

Right ear:

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(2/3 of the 20dB bandwidth MHz)	Verdict
GFSK	LCH	0.996	0.583	PASS
GFSK	MCH	0.996	0.580	PASS
GFSK	HCH	1.000	0.559	PASS
$\pi/4$ DQPSK	LCH	0.998	0.877	PASS
$\pi/4$ DQPSK	MCH	0.996	0.885	PASS
$\pi/4$ DQPSK	HCH	0.996	0.878	PASS
8DPSK	LCH	0.998	0.856	PASS
8DPSK	MCH	0.998	0.869	PASS
8DPSK	HCH	0.996	0.852	PASS

Left ear:
Test Graph

Graphs

GFSK/LCH





GFSK/MCH



GFSK/HCH



$\pi/4$ DQPSK/LCH

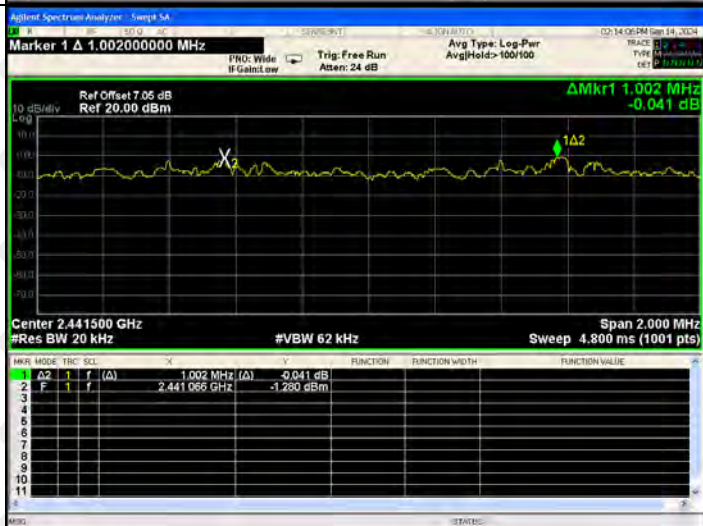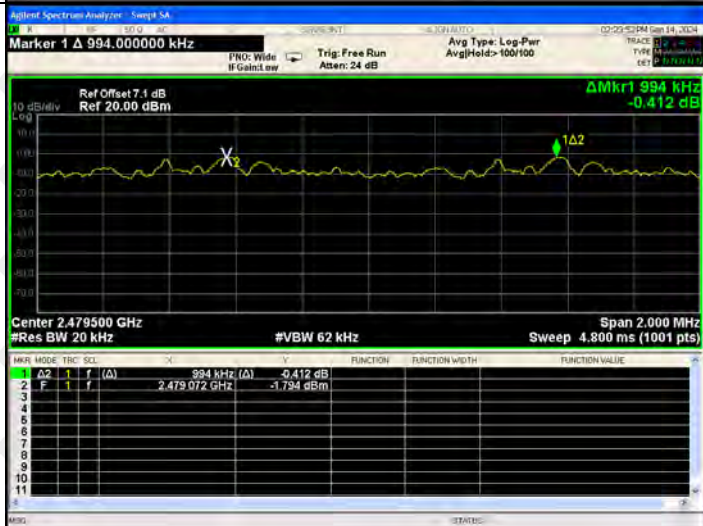 $\pi/4$ DQPSK/MCH

 $\pi/4$ DQPSK/HCH


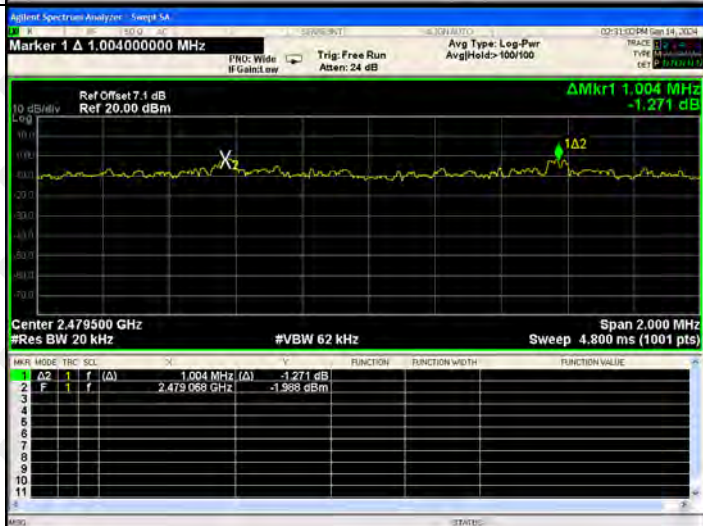
8DPSK/LCH



8DPSK /MCH



8DPSK /HCH



Right ear:
Test Graph

Graphs

GFSK/LCH



GFSK/MCH



GFSK/HCH




$\pi/4$ DQPSK/LCH



$\pi/4$ DQPSK/MCH



$\pi/4$ DQPSK/HCH

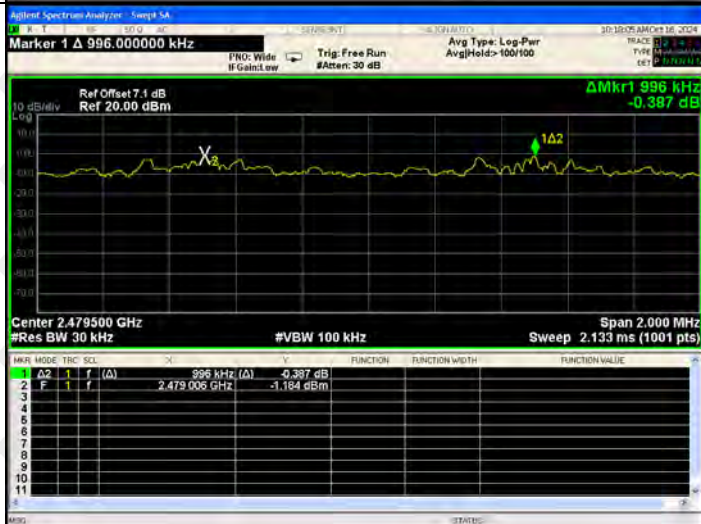


8DPSK/LCH



8DPSK /MCH




8DPSK /HCH

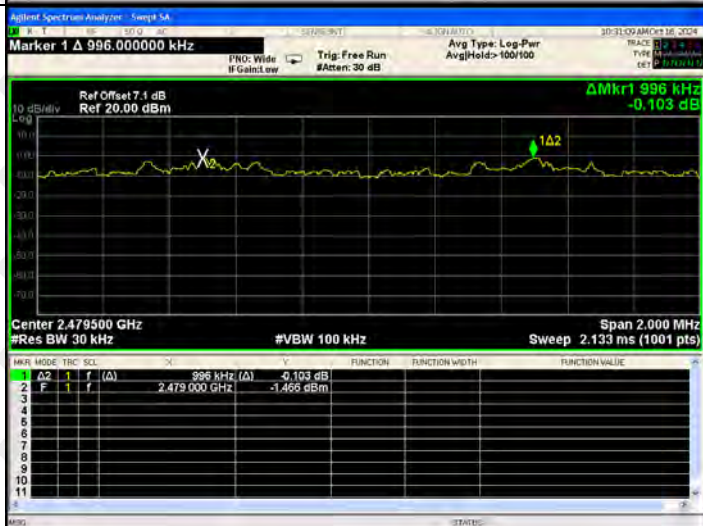

12. HOPPING CHANNEL NUMBER

12.1 Block Diagram Of Test Setup

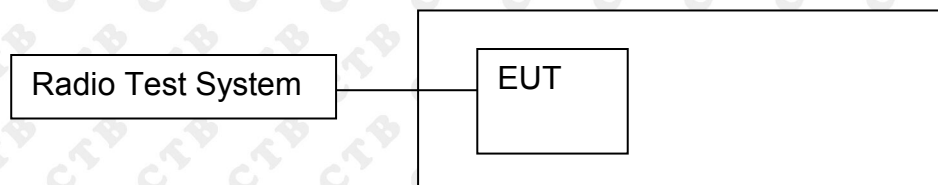

12.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

12.4 Test Result

Left ear:

Mode	Channel.	Number of Hopping Channel	Limit	Verdict
GFSK	Hop	79	≥ 15	PASS
$\pi/4$ DQPSK	Hop	79	≥ 15	PASS
8DPSK	Hop	79	≥ 15	PASS

Right ear:

Mode	Channel.	Number of Hopping Channel	Limit	Verdict
GFSK	Hop	79	≥ 15	PASS
$\pi/4$ DQPSK	Hop	79	≥ 15	PASS
8DPSK	Hop	79	≥ 15	PASS


Left ear:
Test Graph

Graphs


GFSK/Hop



$\pi/4$ DQPSK/Hop

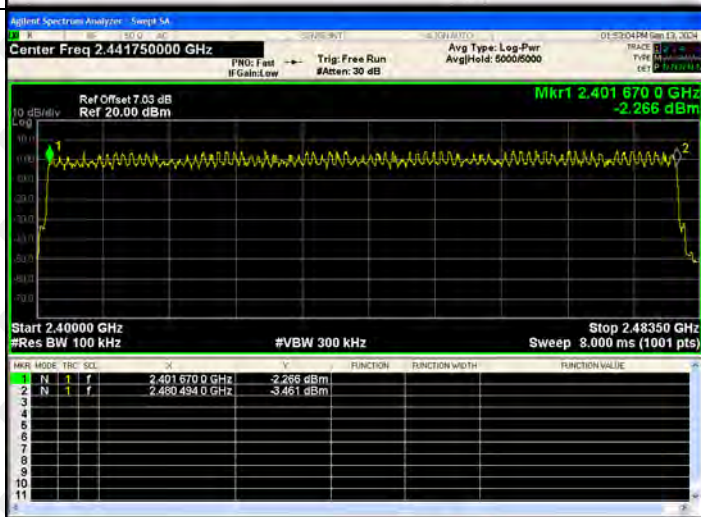


8DPSK/Hop

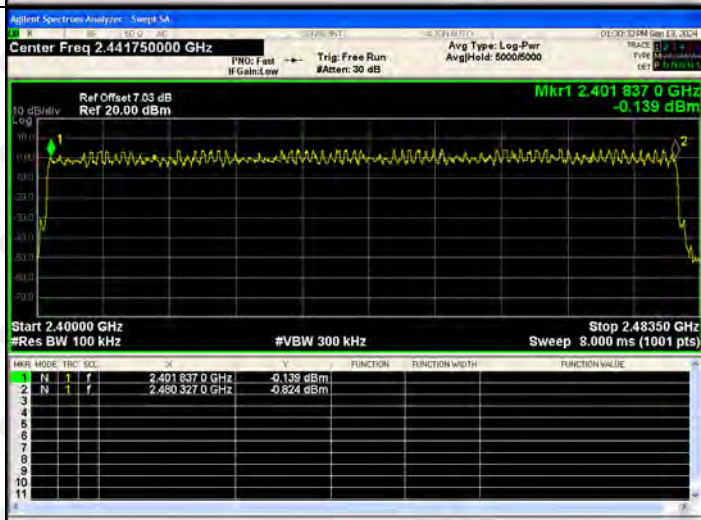


Right ear:
Test Graph

Graphs


GFSK/Hop

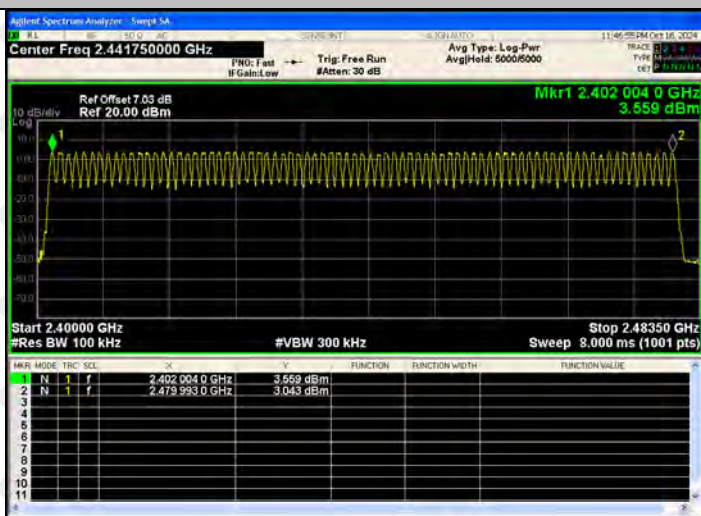

$\pi/4$ DQPSK/Hop

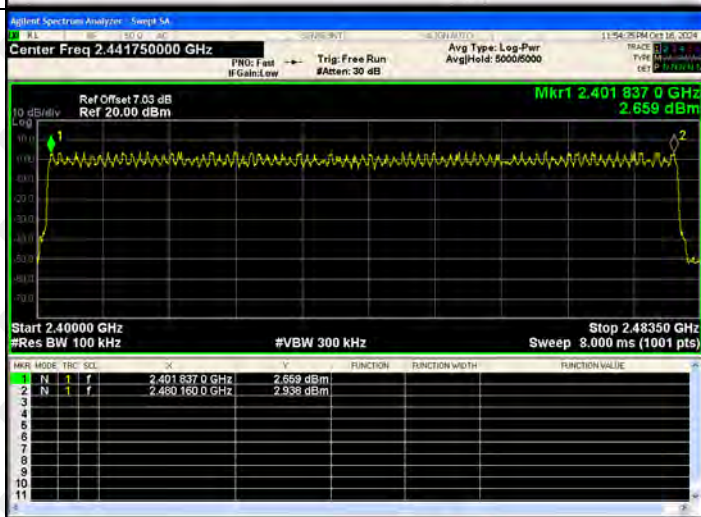


8DPSK/Hop

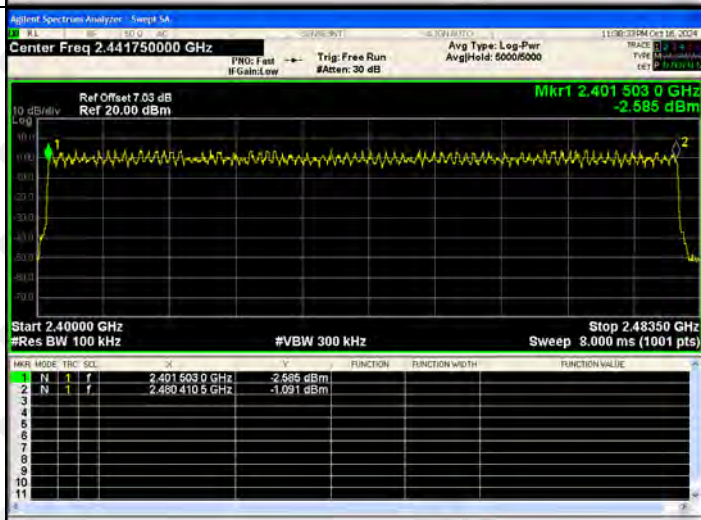

13. DWELL TIME

13.1 Block Diagram Of Test Setup

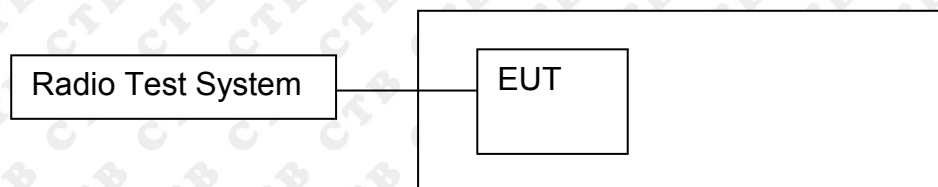

13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

13.4 Test Result

Left ear:

Worst case-GFSK:

Mode	Packet	Channel	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Verdict
GFSK	DH1	LCH	0.401	128.32	400	PASS
	DH1	MCH	0.4	128	400	PASS
	DH1	HCH	0.399	127.68	400	PASS
	DH3	LCH	1.663	266.08	400	PASS
	DH3	MCH	1.64	262.4	400	PASS
	DH3	HCH	1.663	266.08	400	PASS
	DH5	LCH	2.914	310.827	400	PASS
	DH5	MCH	2.912	310.613	400	PASS
	DH5	HCH	2.912	310.613	400	PASS

Right ear:

Worst case-GFSK:

Mode	Packet	Channel	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Verdict
GFSK	DH1	LCH	0.383	122.56	400	PASS
	DH1	MCH	0.383	122.56	400	PASS
	DH1	HCH	0.382	122.24	400	PASS
	DH3	LCH	1.637	261.92	400	PASS
	DH3	MCH	1.644	263.04	400	PASS
	DH3	HCH	1.644	263.04	400	PASS
	DH5	LCH	2.894	308.693	400	PASS
	DH5	MCH	2.894	308.693	400	PASS
	DH5	HCH	2.894	308.693	400	PASS

Remark: DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:

DH5: $1600/79/6 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$

DH3: $1600/79/4 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$


DH1: $1600/79/2 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$

Remark: Mkr Delta is once pulse time.


Left ear:
Test Graph

Graphs


GFSK_DH1/LCH

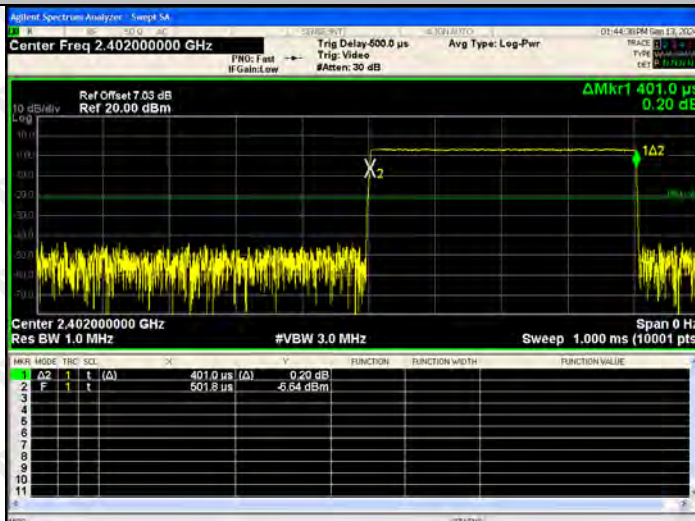


GFSK_DH1/MCH

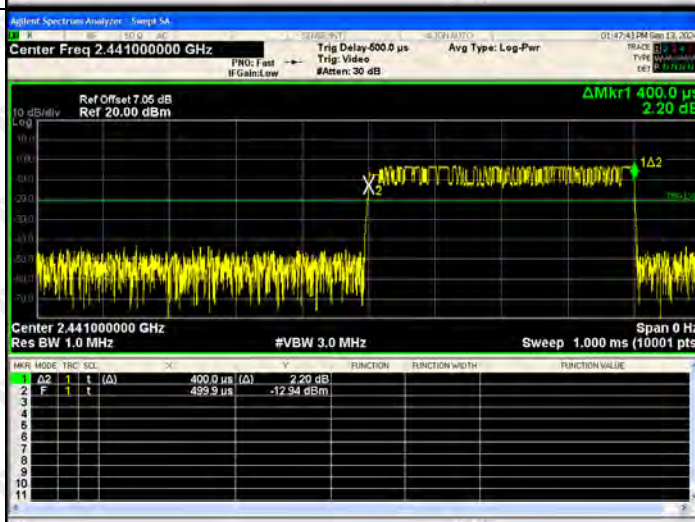


GFSK_DH1/HCH

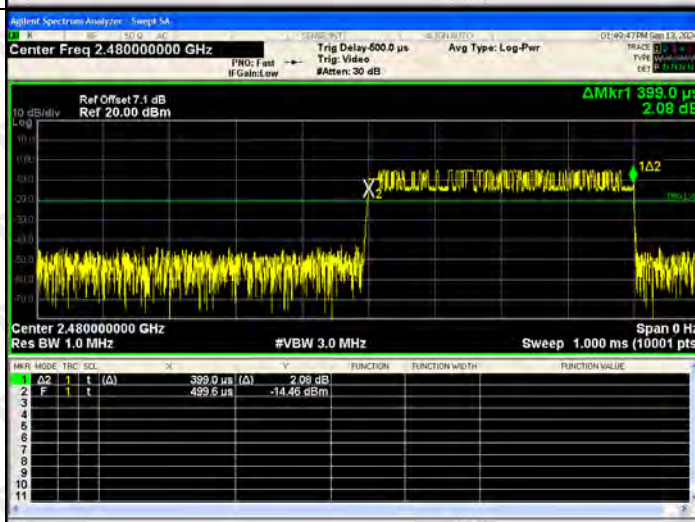


GFSK_DH3/LCH

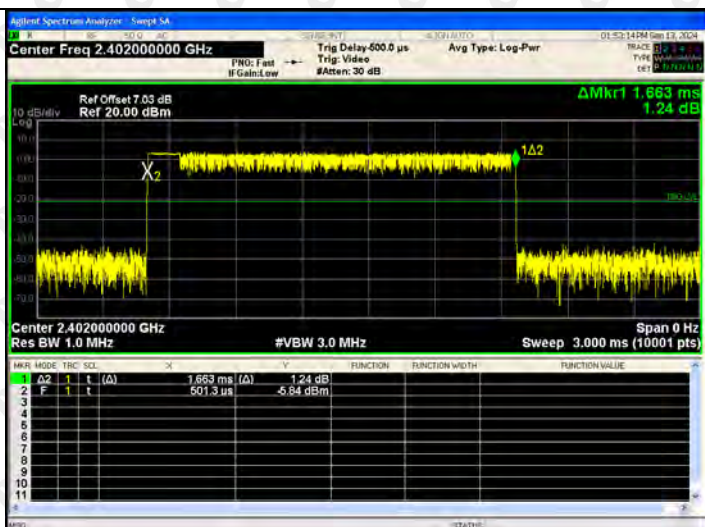


GFSK_DH3/MCH

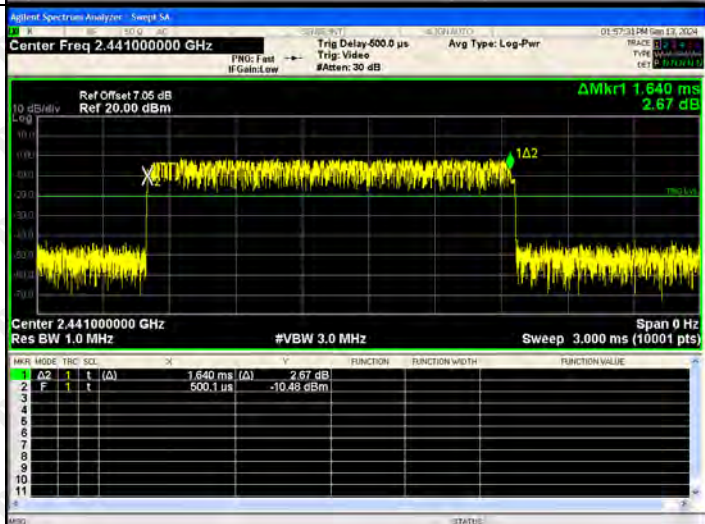

GFSK_DH3/HCH

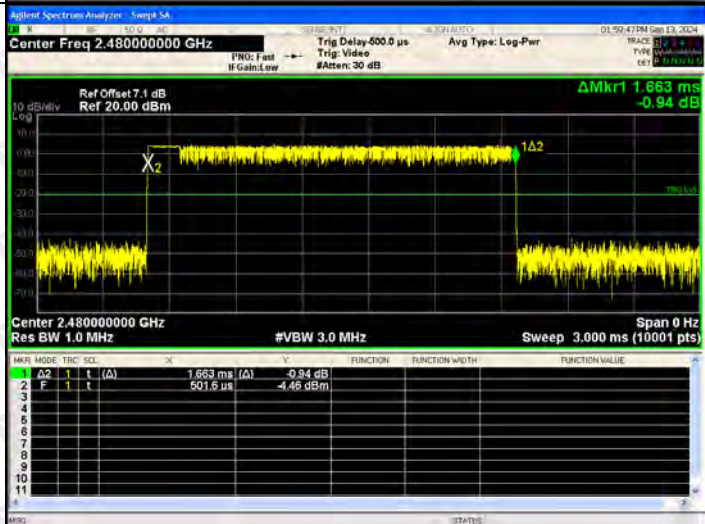


GFSK_DH5/LCH

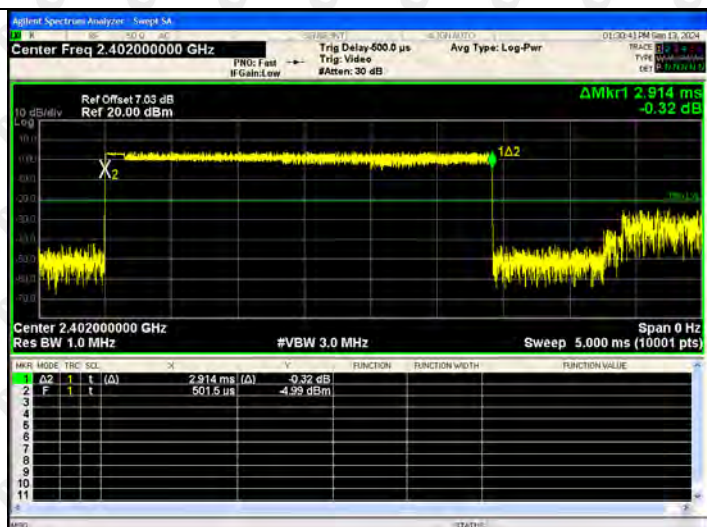

GFSK_DH5/MCH




GFSK_DH5/HCH

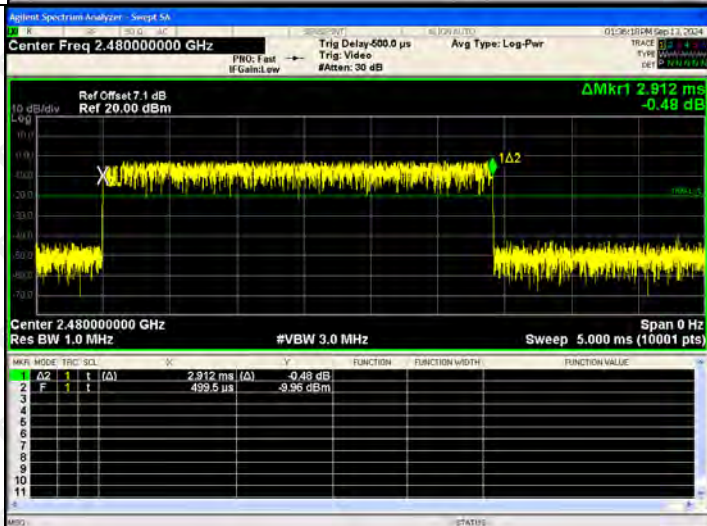


Right ear:
Test Graph

Graphs


GFSK_DH1/LCH

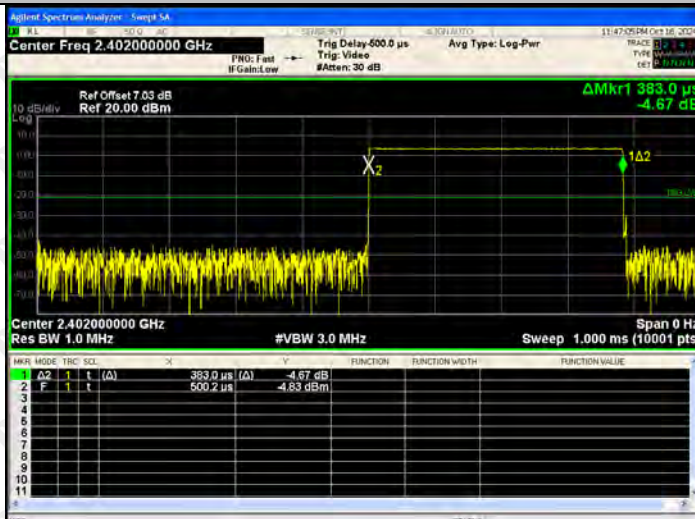

GFSK_DH1/MCH

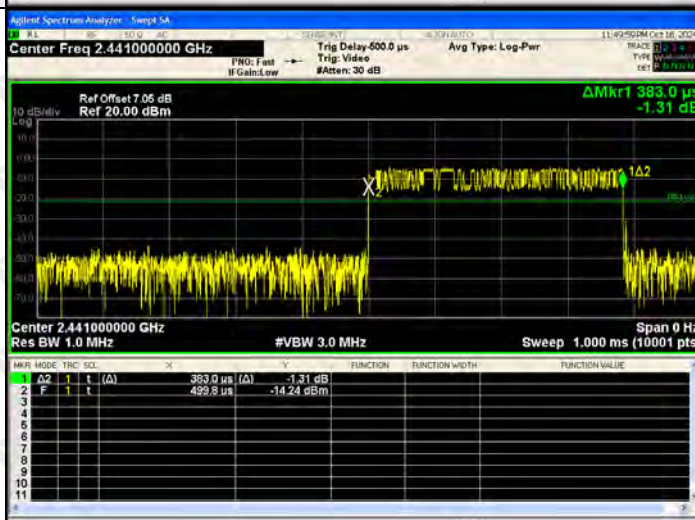

GFSK_DH1/HCH

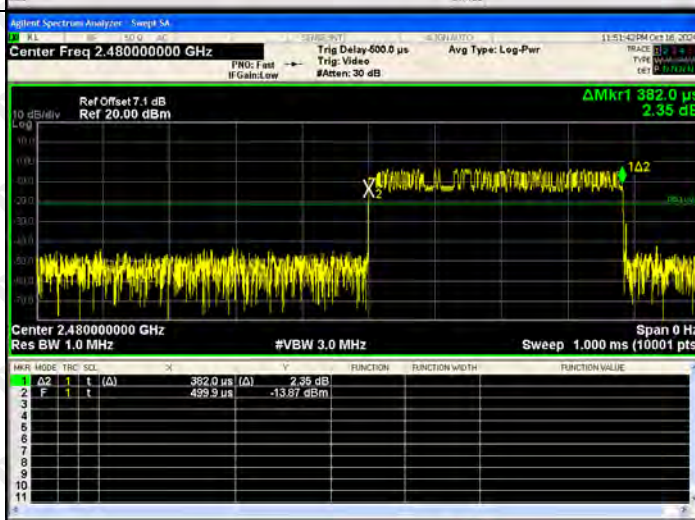


GFSK_DH3/LCH



GFSK_DH3/MCH



GFSK_DH3/HCH

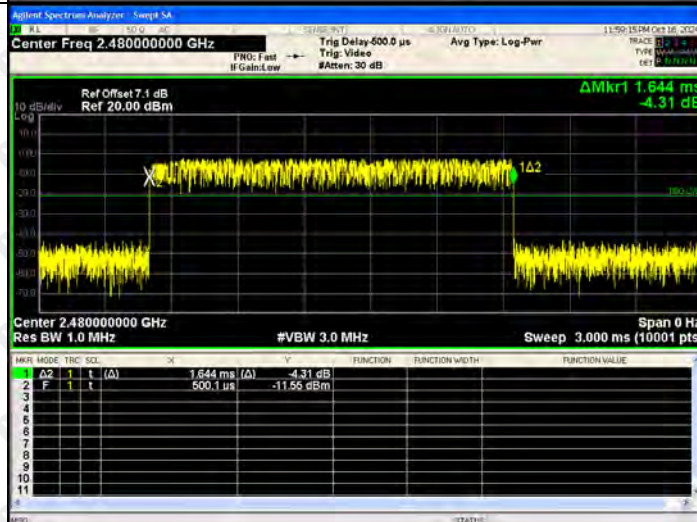

GFSK_DH5/LCH



GFSK_DH5/MCH



GFSK_DH5/HCH



14. PSEUDORANDOM FREQUENCY

14.1 Limit


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


14.2 Test procedure

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

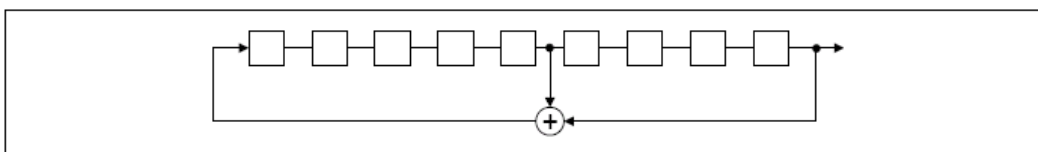

An example of Pseudorandom Frequency Hopping Sequence as follow:

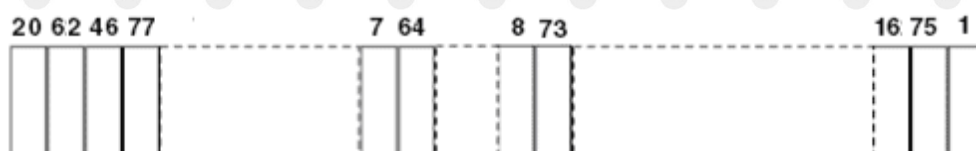

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

14.3 Test Result

The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

15. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is chip antenna. The best case gain of the antenna is 1.7dBi.


16. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G



Above 1G

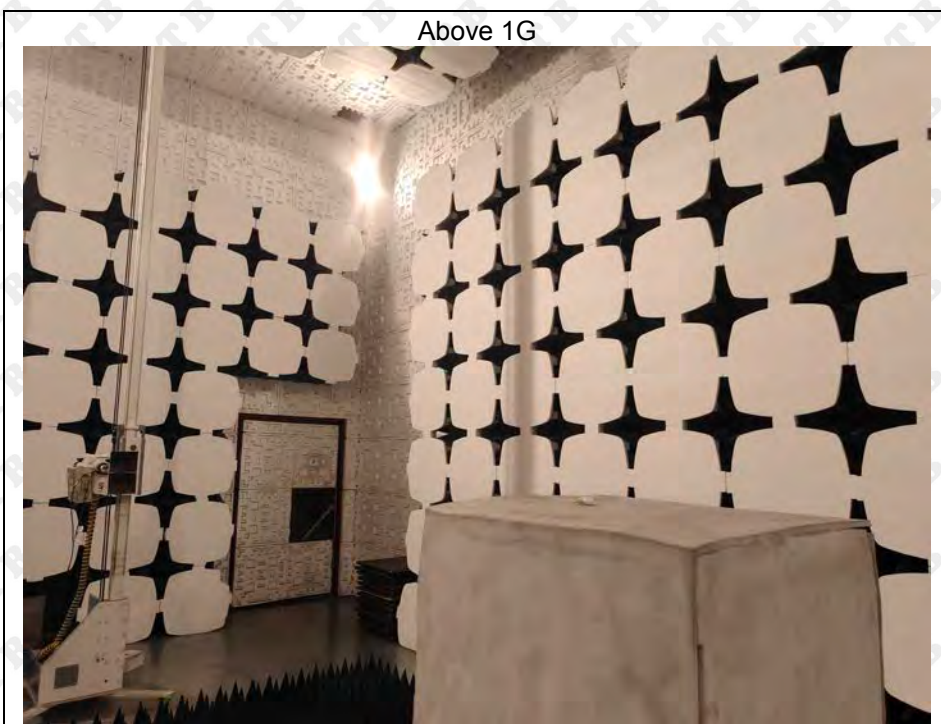

Conducted emissions



***** END OF REPORT *****