

1. Duty Cycle


1.1 Test Result

1.1.1 Ant1


Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	1.679	1.875	89.55	0.48	0.03
		2440	1.679	1.876	89.50	0.48	0.03
		2480	1.679	1.876	89.50	0.48	0.03

1.2 Test Graph

1.2.1 Ant1

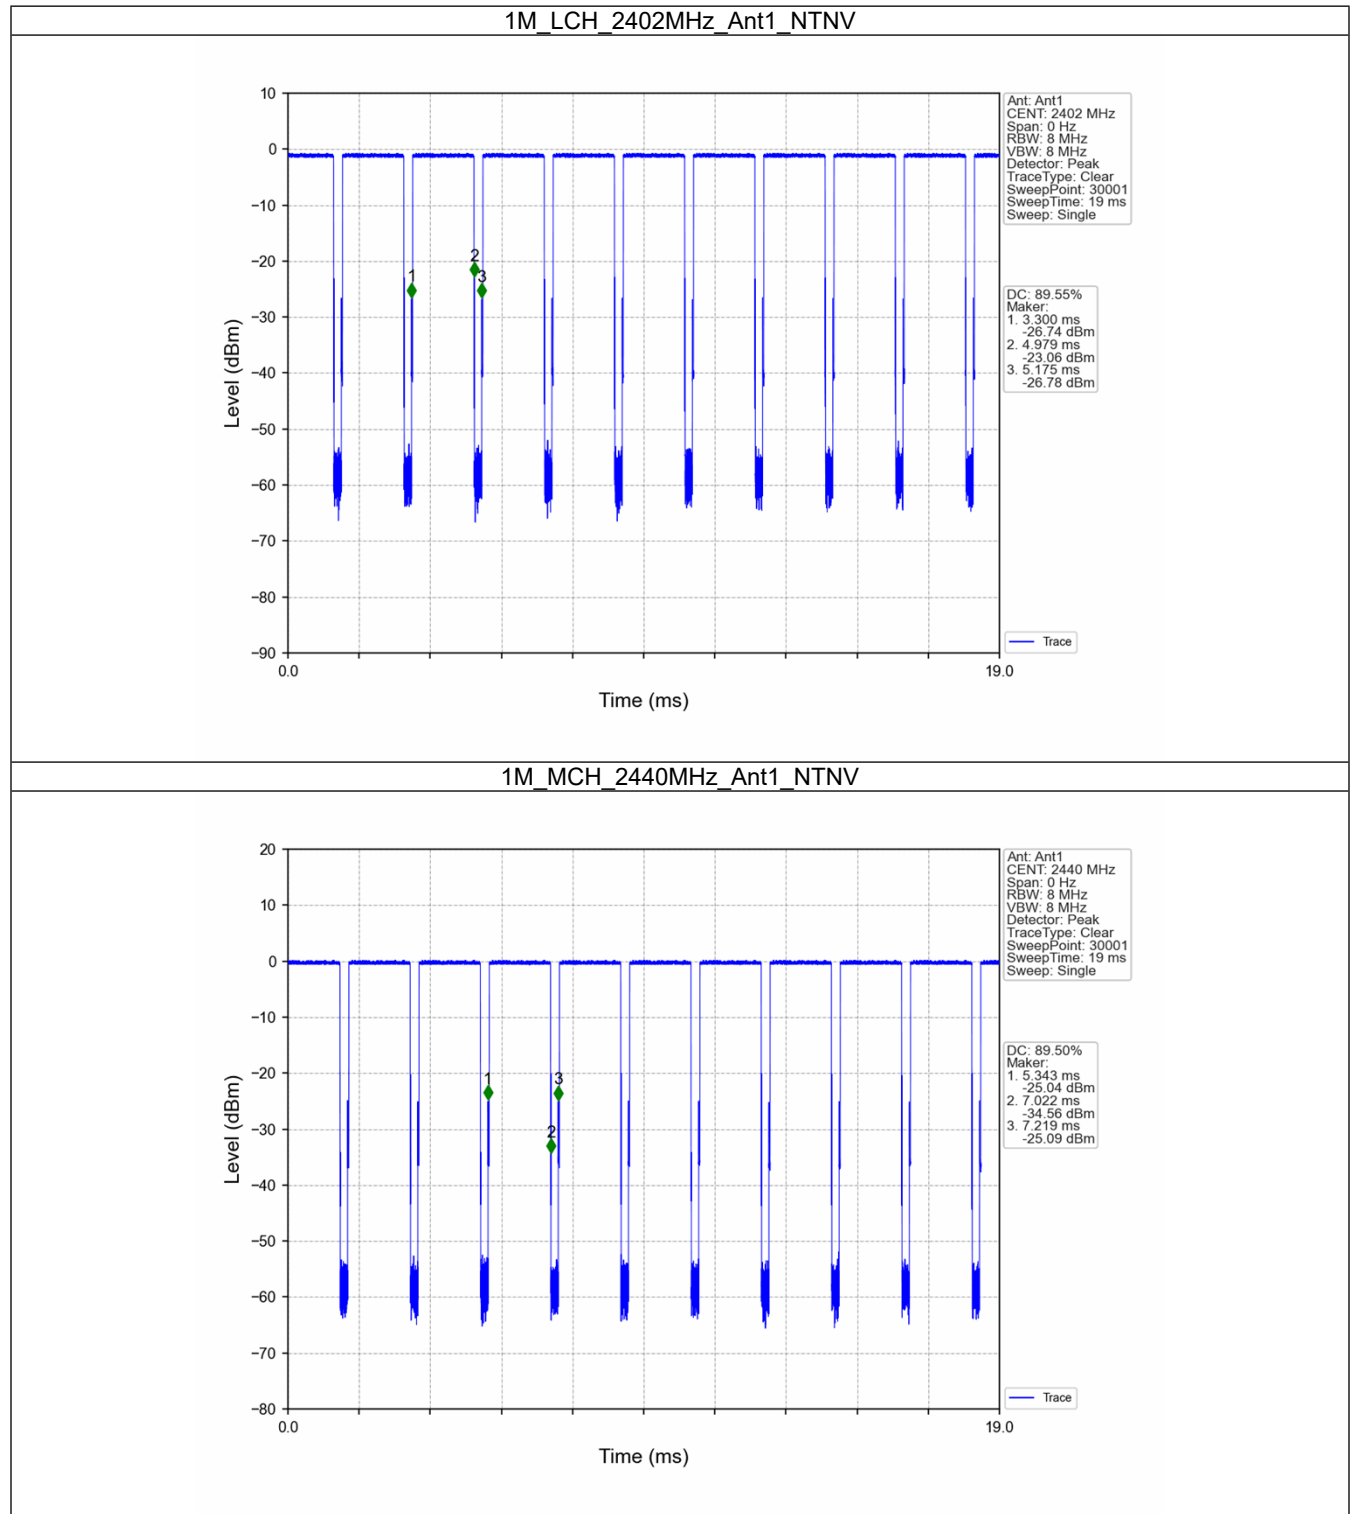

1M_HCH_2480MHz_Ant1_NTNV

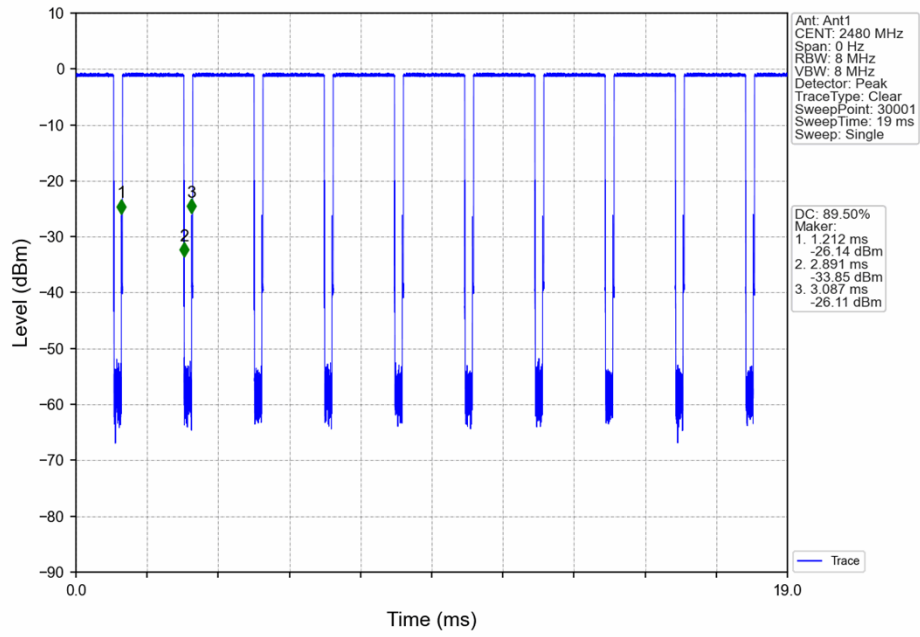

2. Bandwidth

2.1 Test Result

2.1.1 OBW


Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	1.015	/	Pass
		2440	1	1.015	/	Pass
		2480	1	1.016	/	Pass

2.1.2 6dB BW


Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.669	≥ 0.5	Pass
		2440	1	0.666	≥ 0.5	Pass
		2480	1	0.665	≥ 0.5	Pass

2.2 Test Graph


2.2.1 OBW

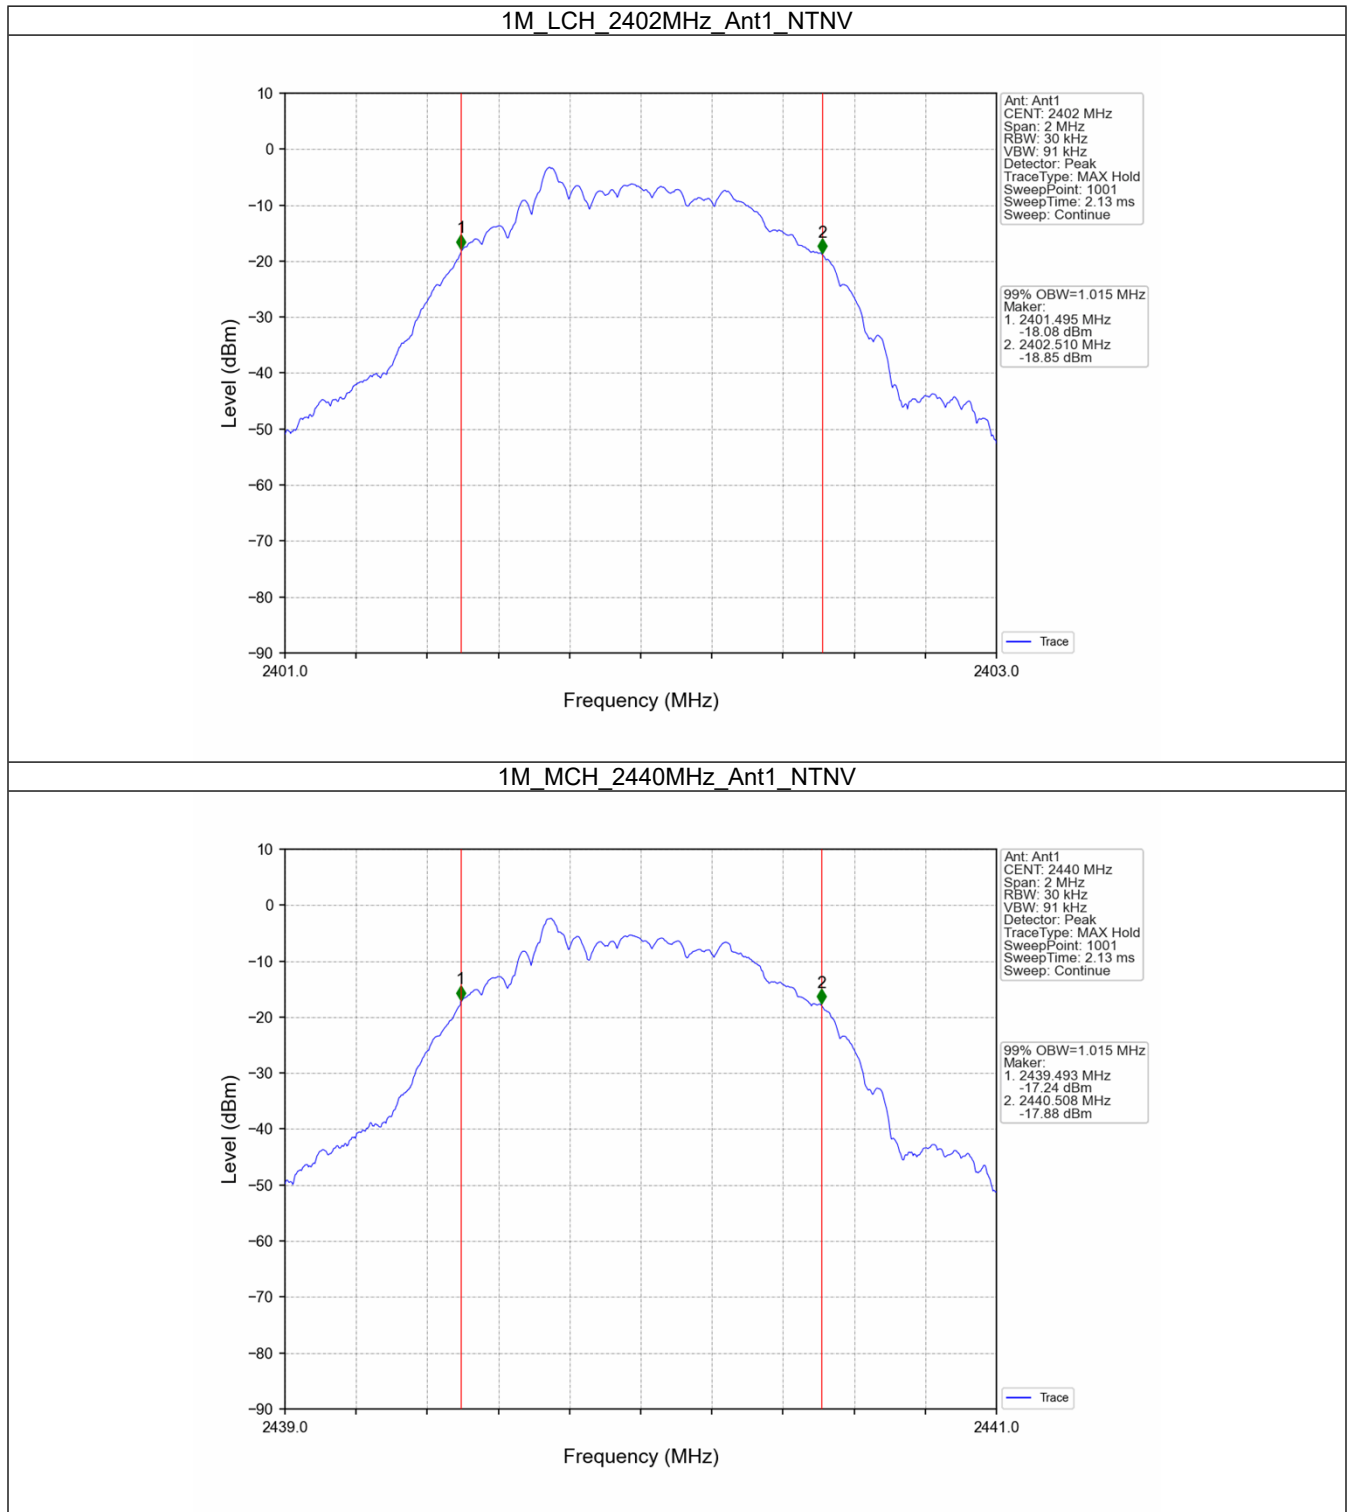


1M_HCH_2480MHz_Ant1_NTNV

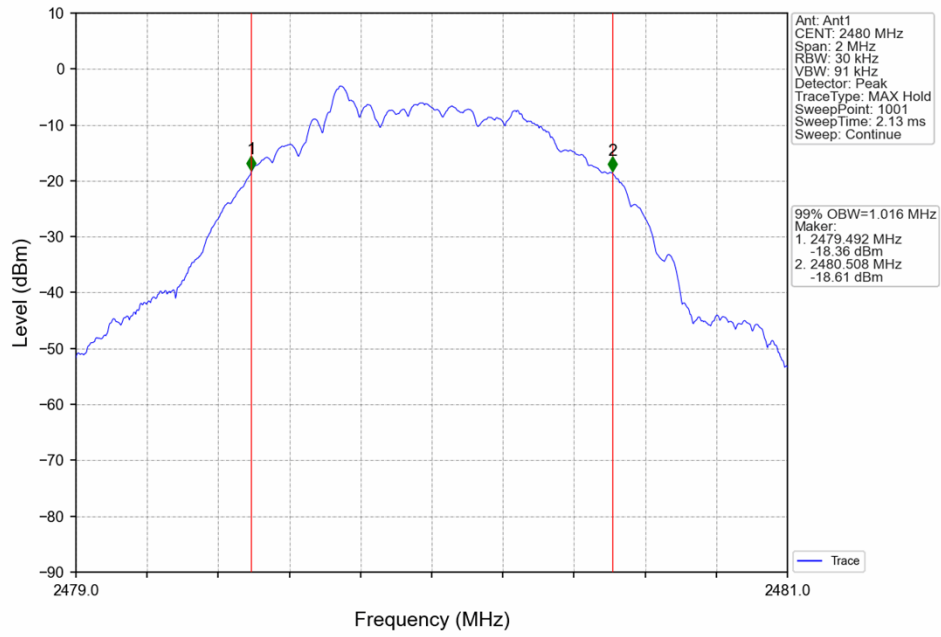

2.2.2 6dB BW

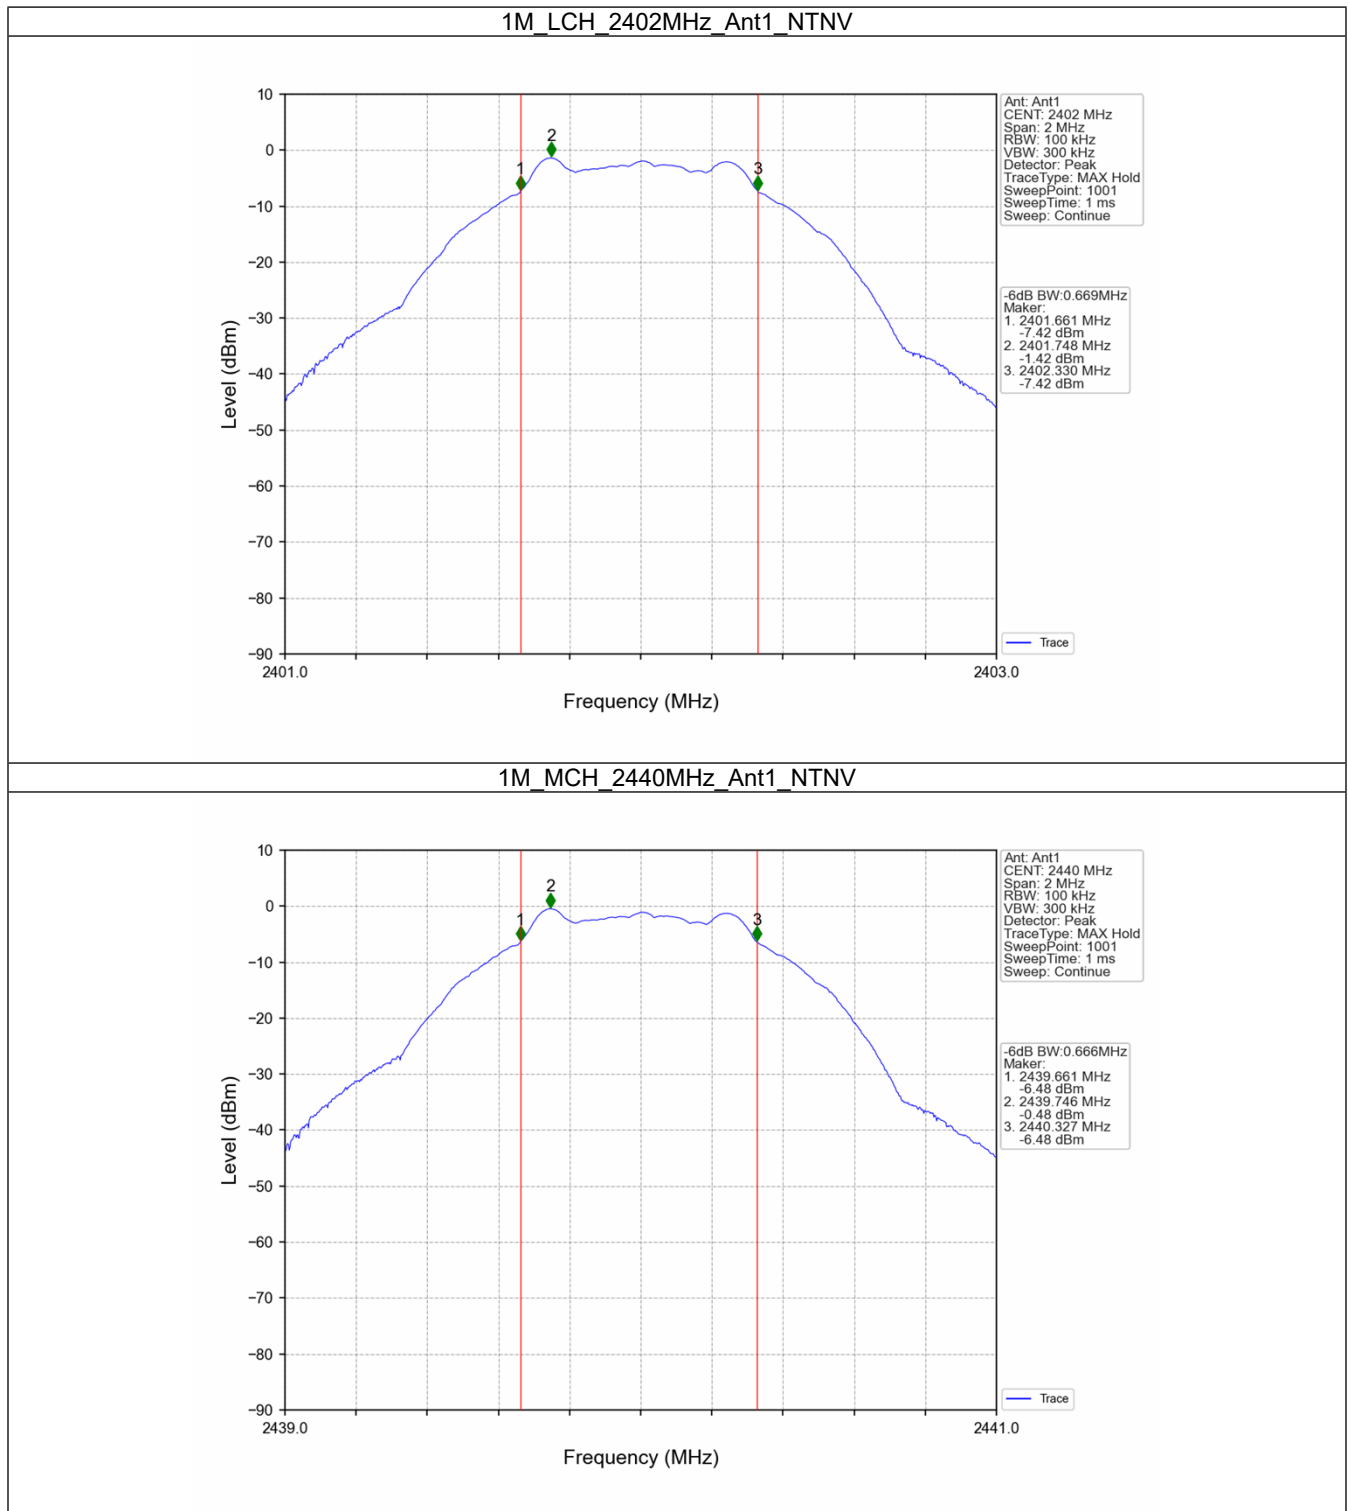

1M_HCH_2480MHz_Ant1_NTNV

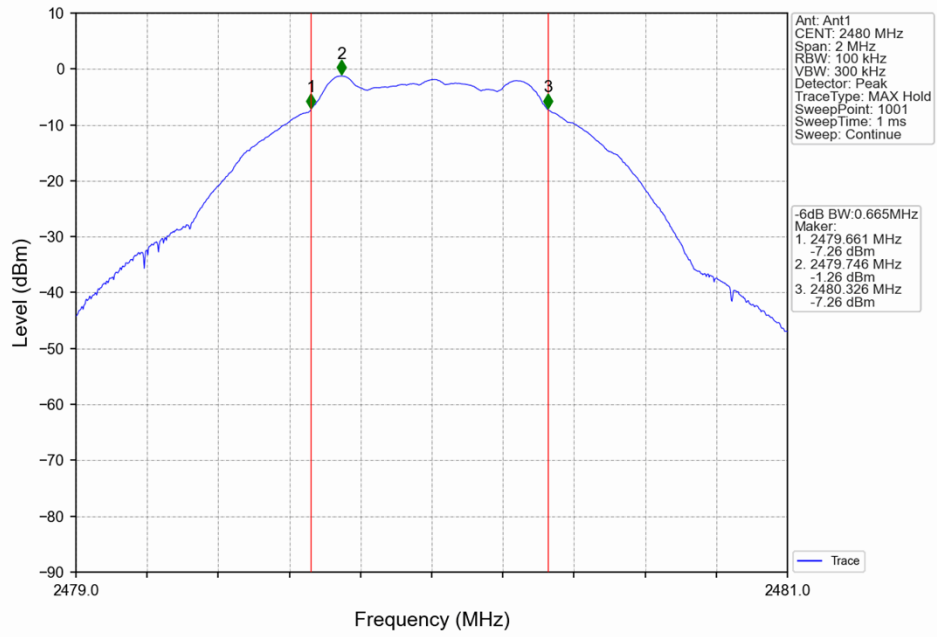

3. Maximum Conducted Output Power


3.1 Test Result

3.1.1 Power


Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	-1.02	<=30	Pass
		2440	-0.17	<=30	Pass
		2480	-1.01	<=30	Pass
Note1: Antenna Gain: Ant1: -0.86dBi:					

3.2 Test Graph

3.2.1 Power

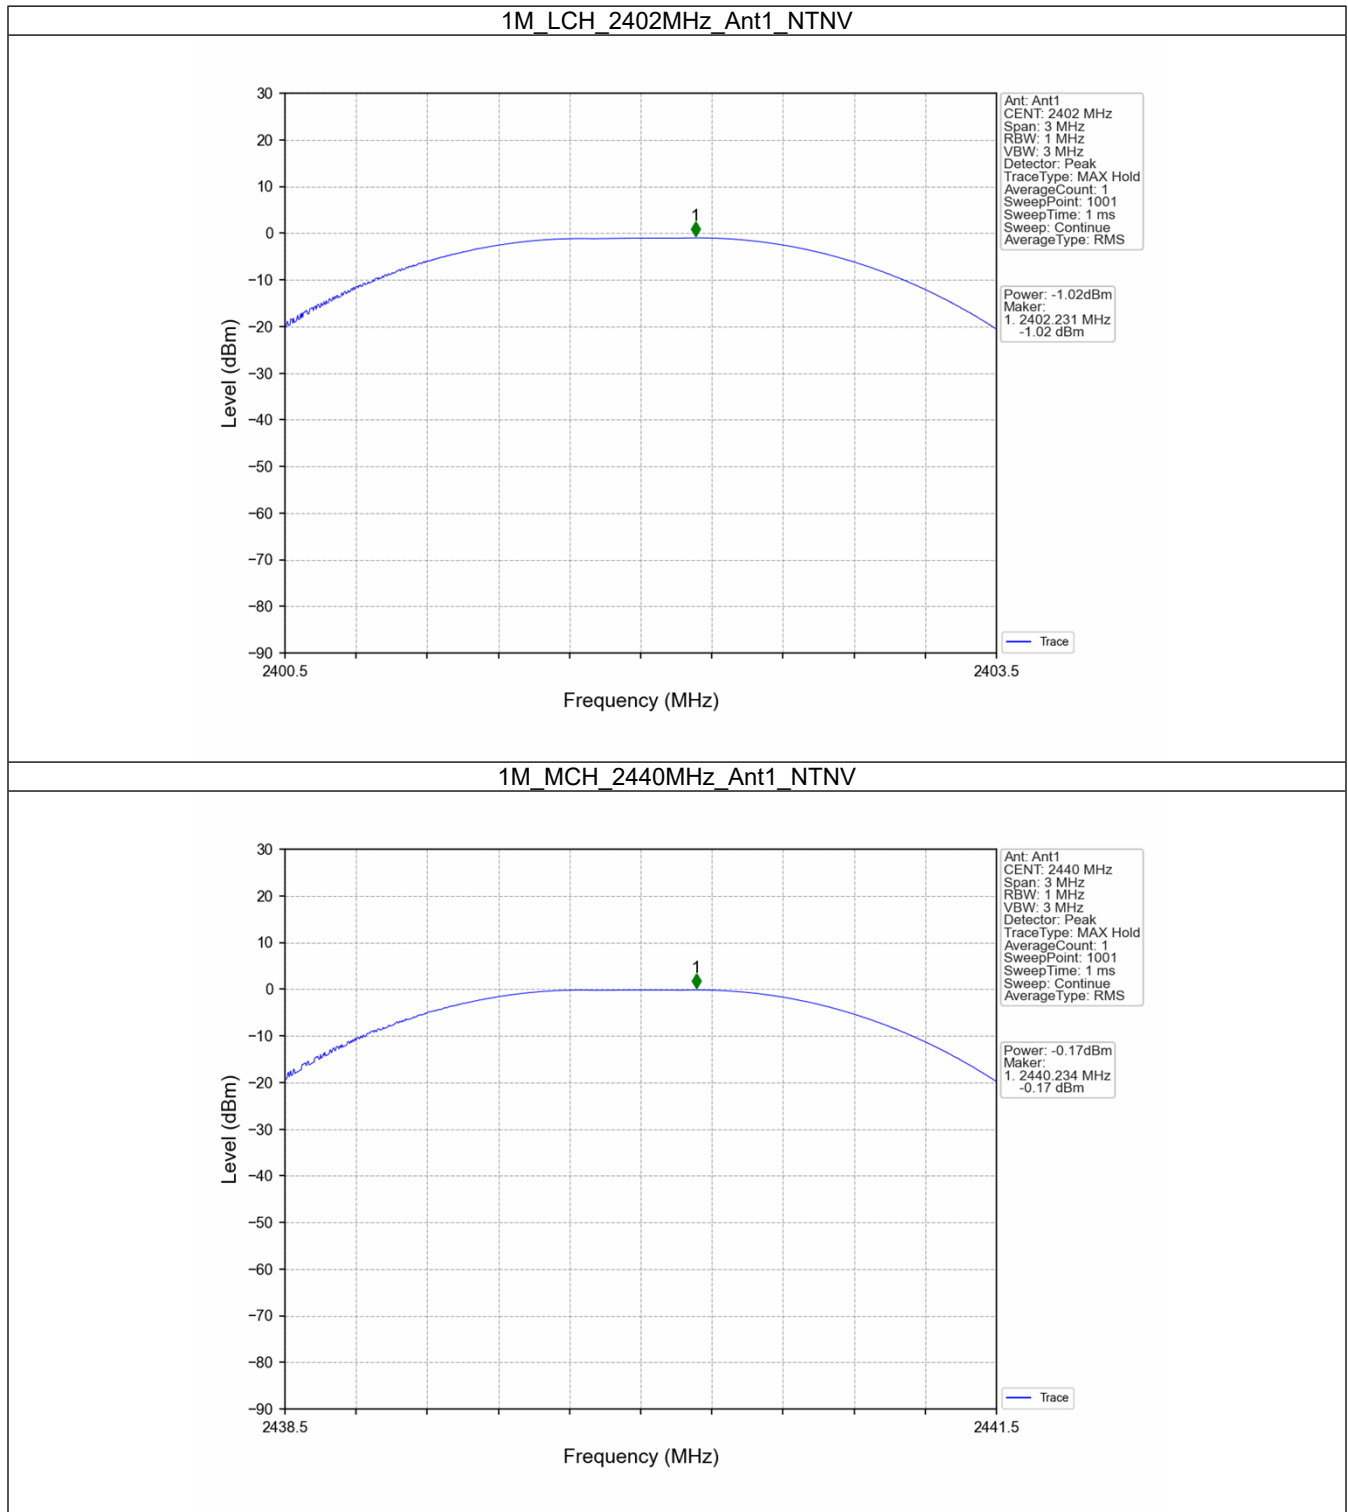

1M_HCH_2480MHz_Ant1_NTNV

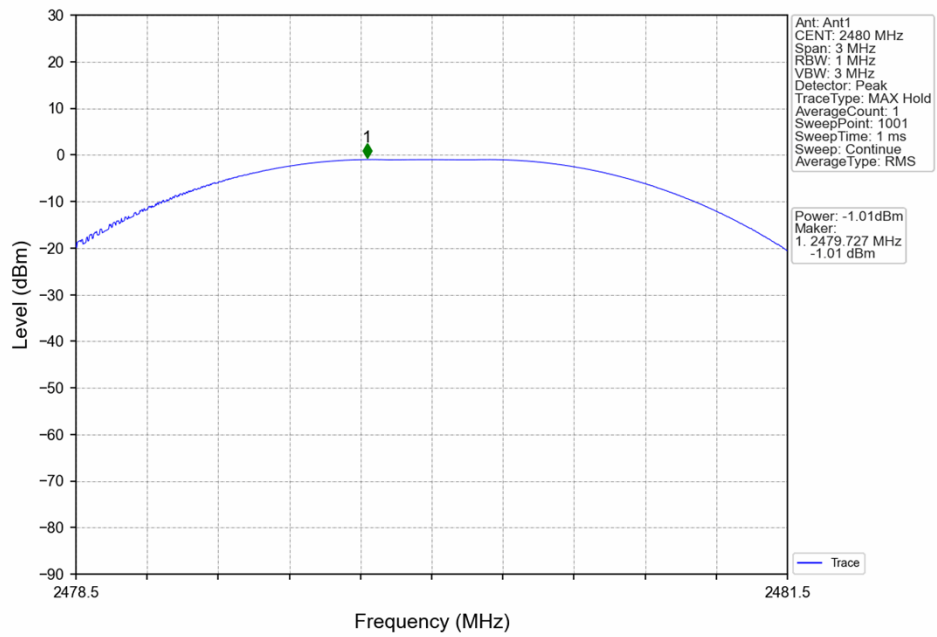

4. Maximum Power Spectral Density


4.1 Test Result

4.1.1 PSD


Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
1M	SISO	2402	-17.47	<=8	Pass
		2440	-16.61	<=8	Pass
		2480	-17.40	<=8	Pass
Note1: Antenna Gain: Ant1: -0.86dBi:					

4.2 Test Graph

4.2.1 PSD

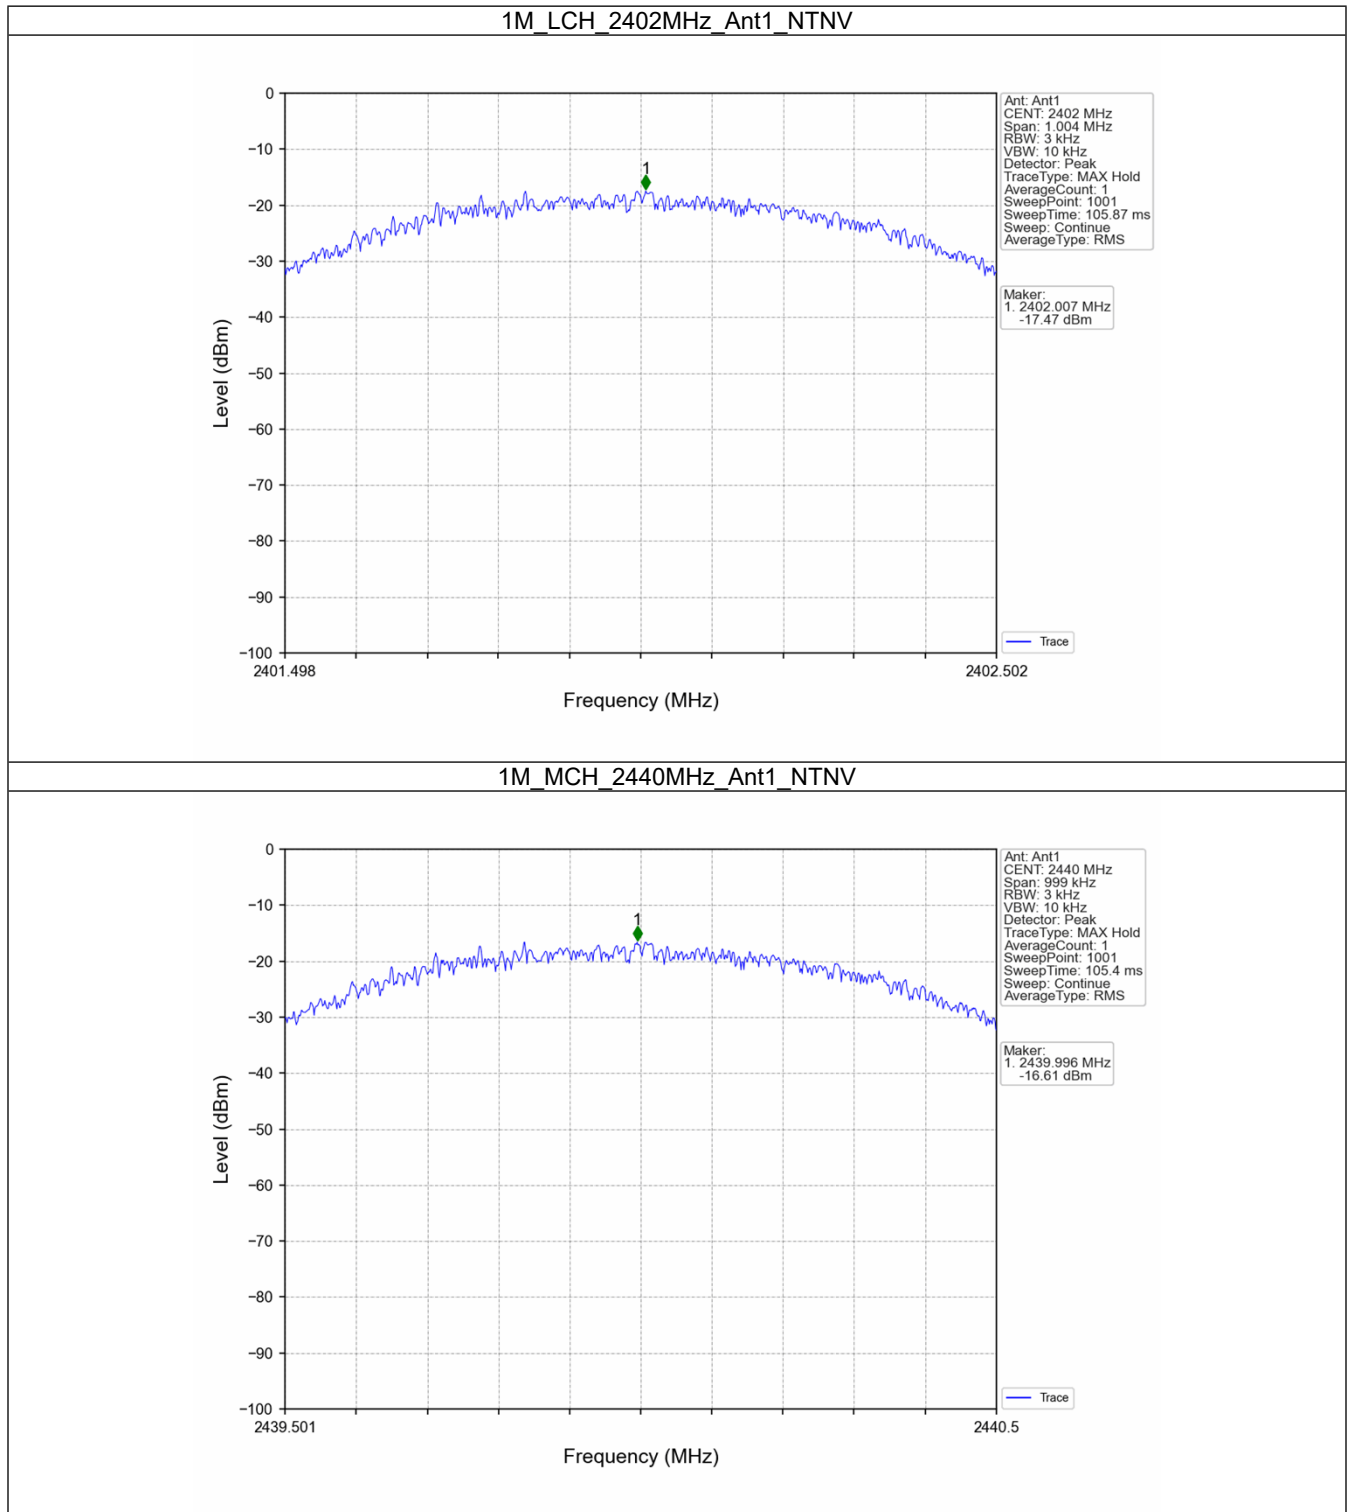

1M_HCH_2480MHz_Ant1_NTNV

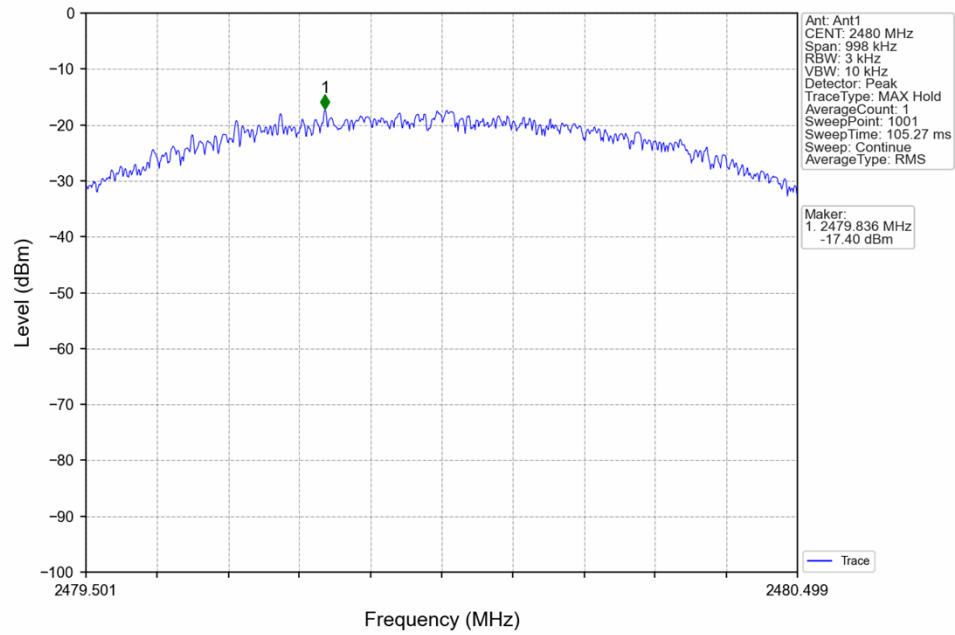





Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	-1.42	-21.42	Pass
		2440	1	-0.50	-20.50	Pass
		2480	1	-1.26	-21.26	Pass
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.						

5.2 Test Graph


5.2.1 Ref

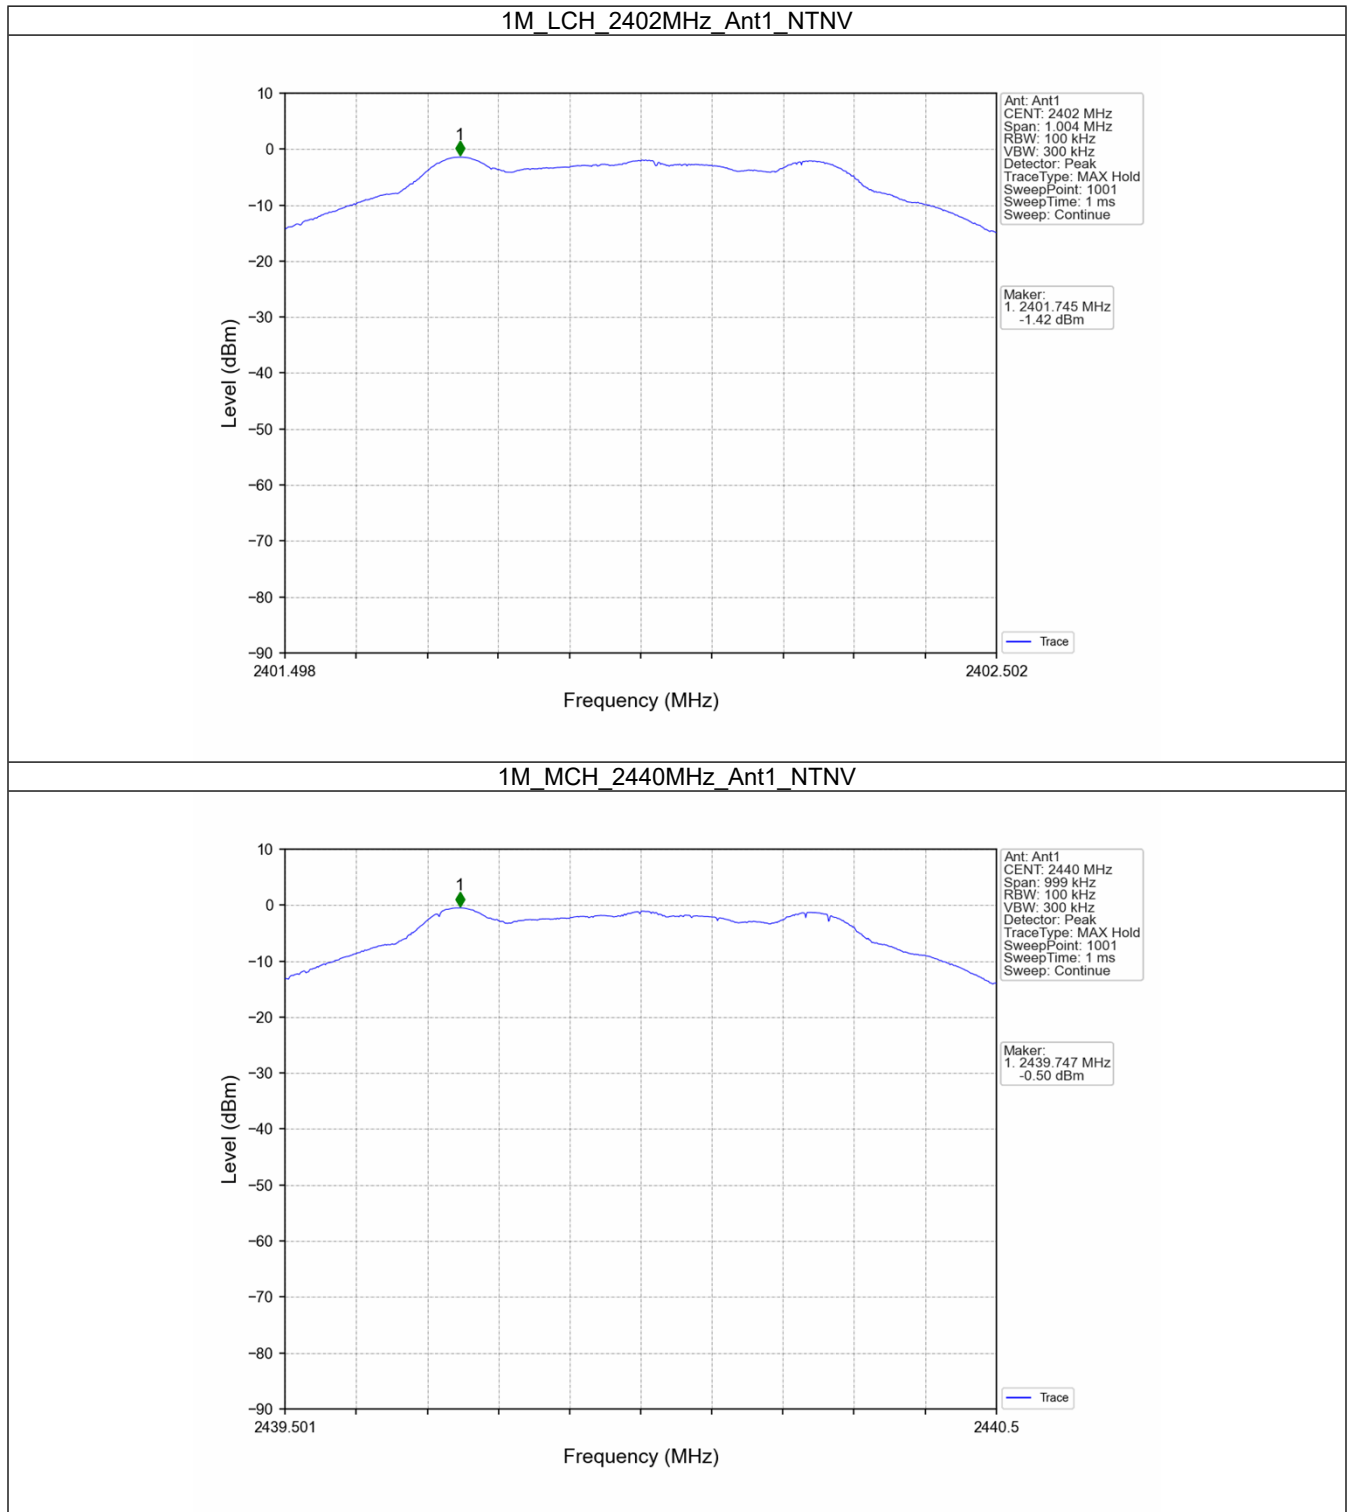


1M_HCH_2480MHz_Ant1_NTNV

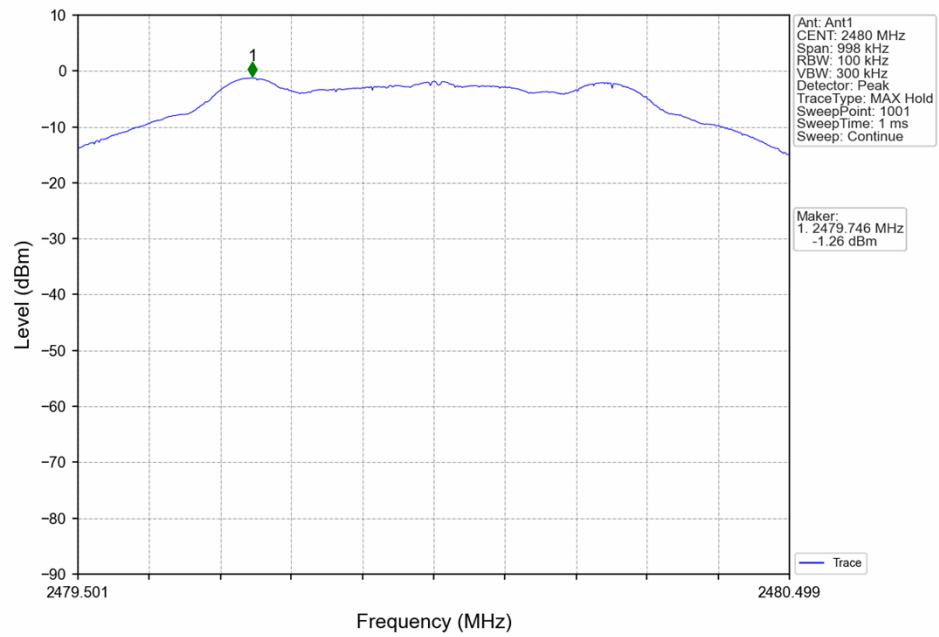


5.2.2 CSE

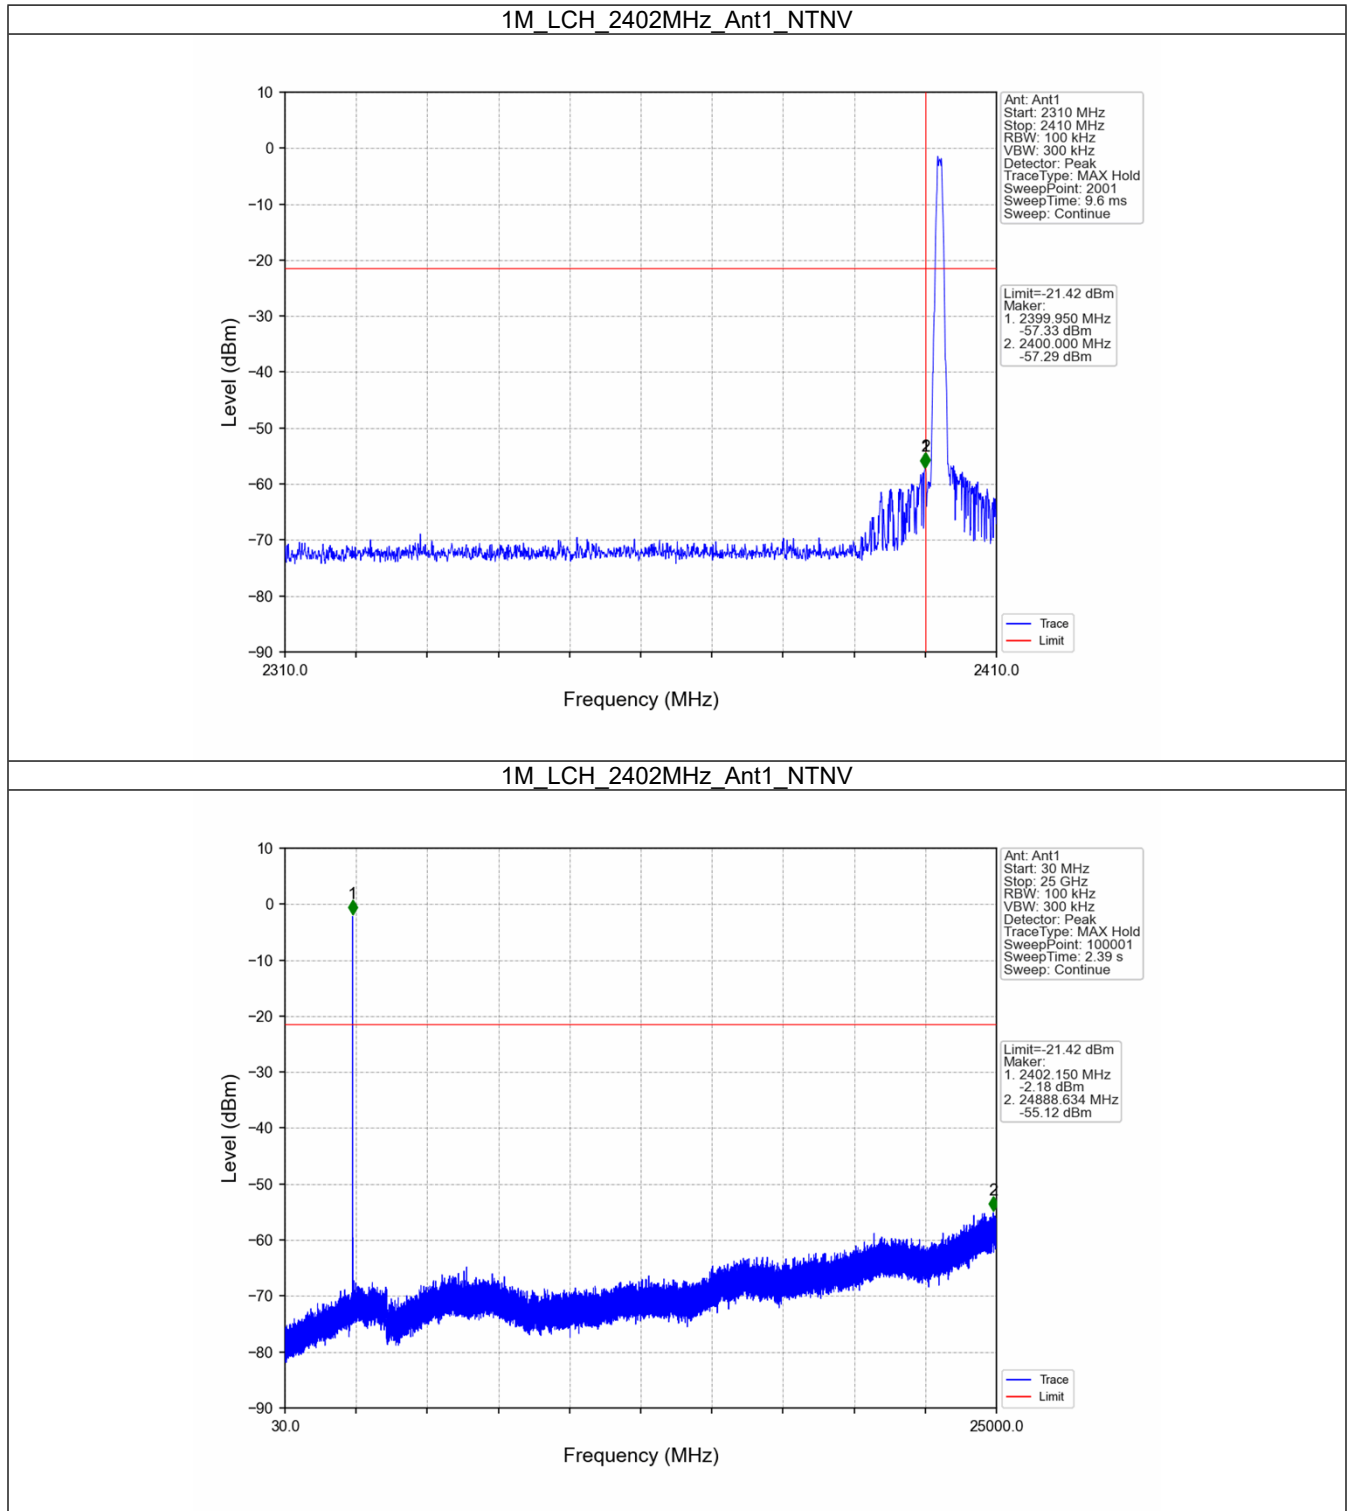


1M_MCH_2440MHz_Ant1_NTNV

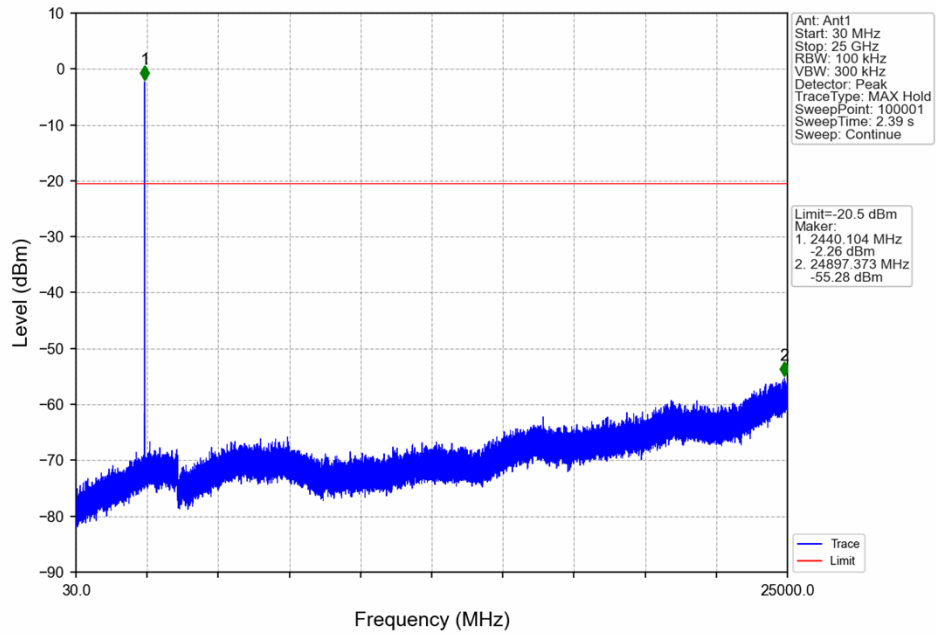

1M_HCH_2480MHz_Ant1_NTNV

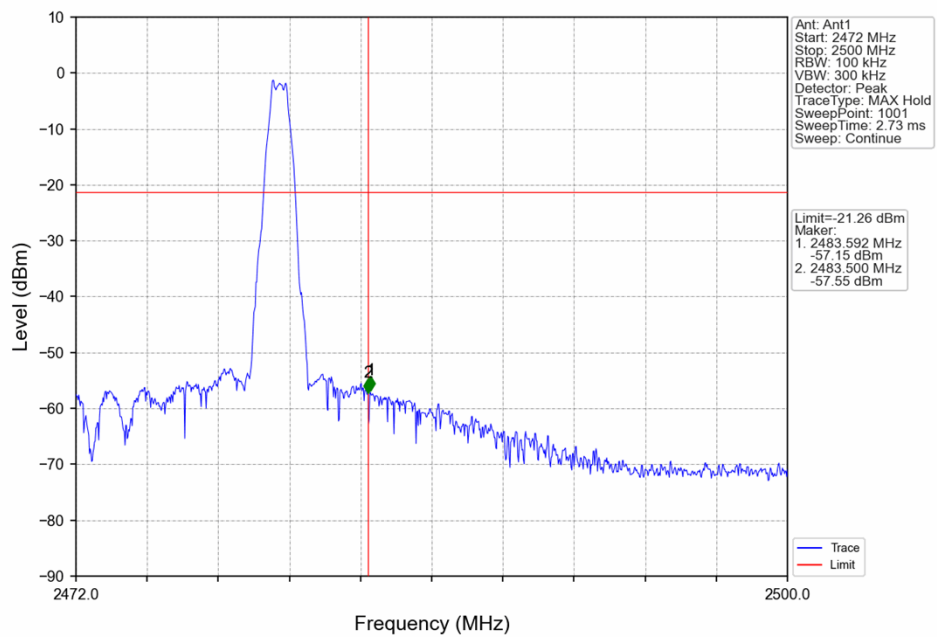

1M_HCH_2480MHz_Ant1_NTNV

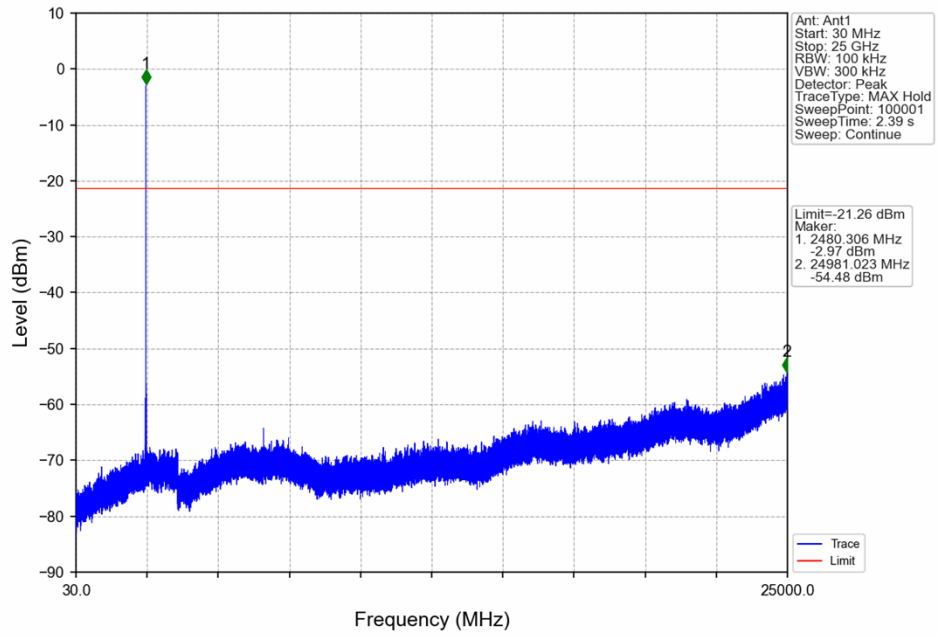

6. Form731

6.1 Test Result

6.1.1 Form731

Lower Freq (MHz)	High Freq (MHz)	MAX Power (W)	MAX Power (dBm)
2402	2480	0.0010	-0.17