





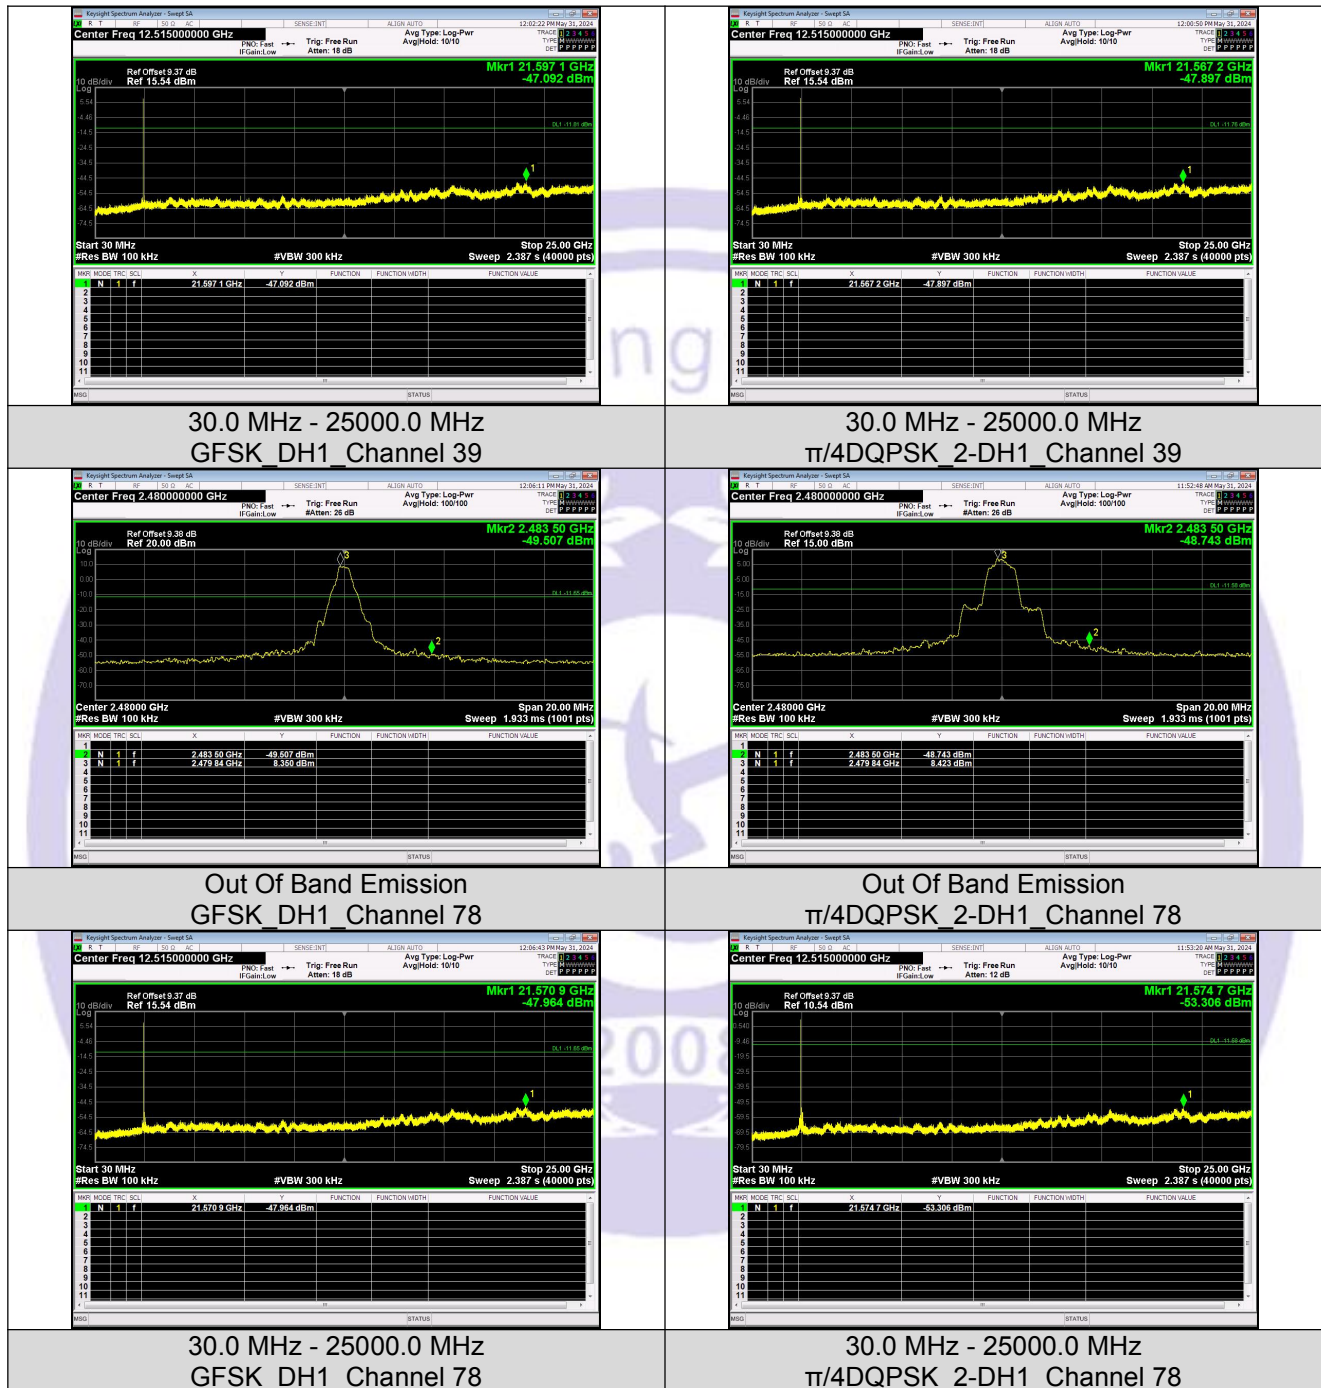

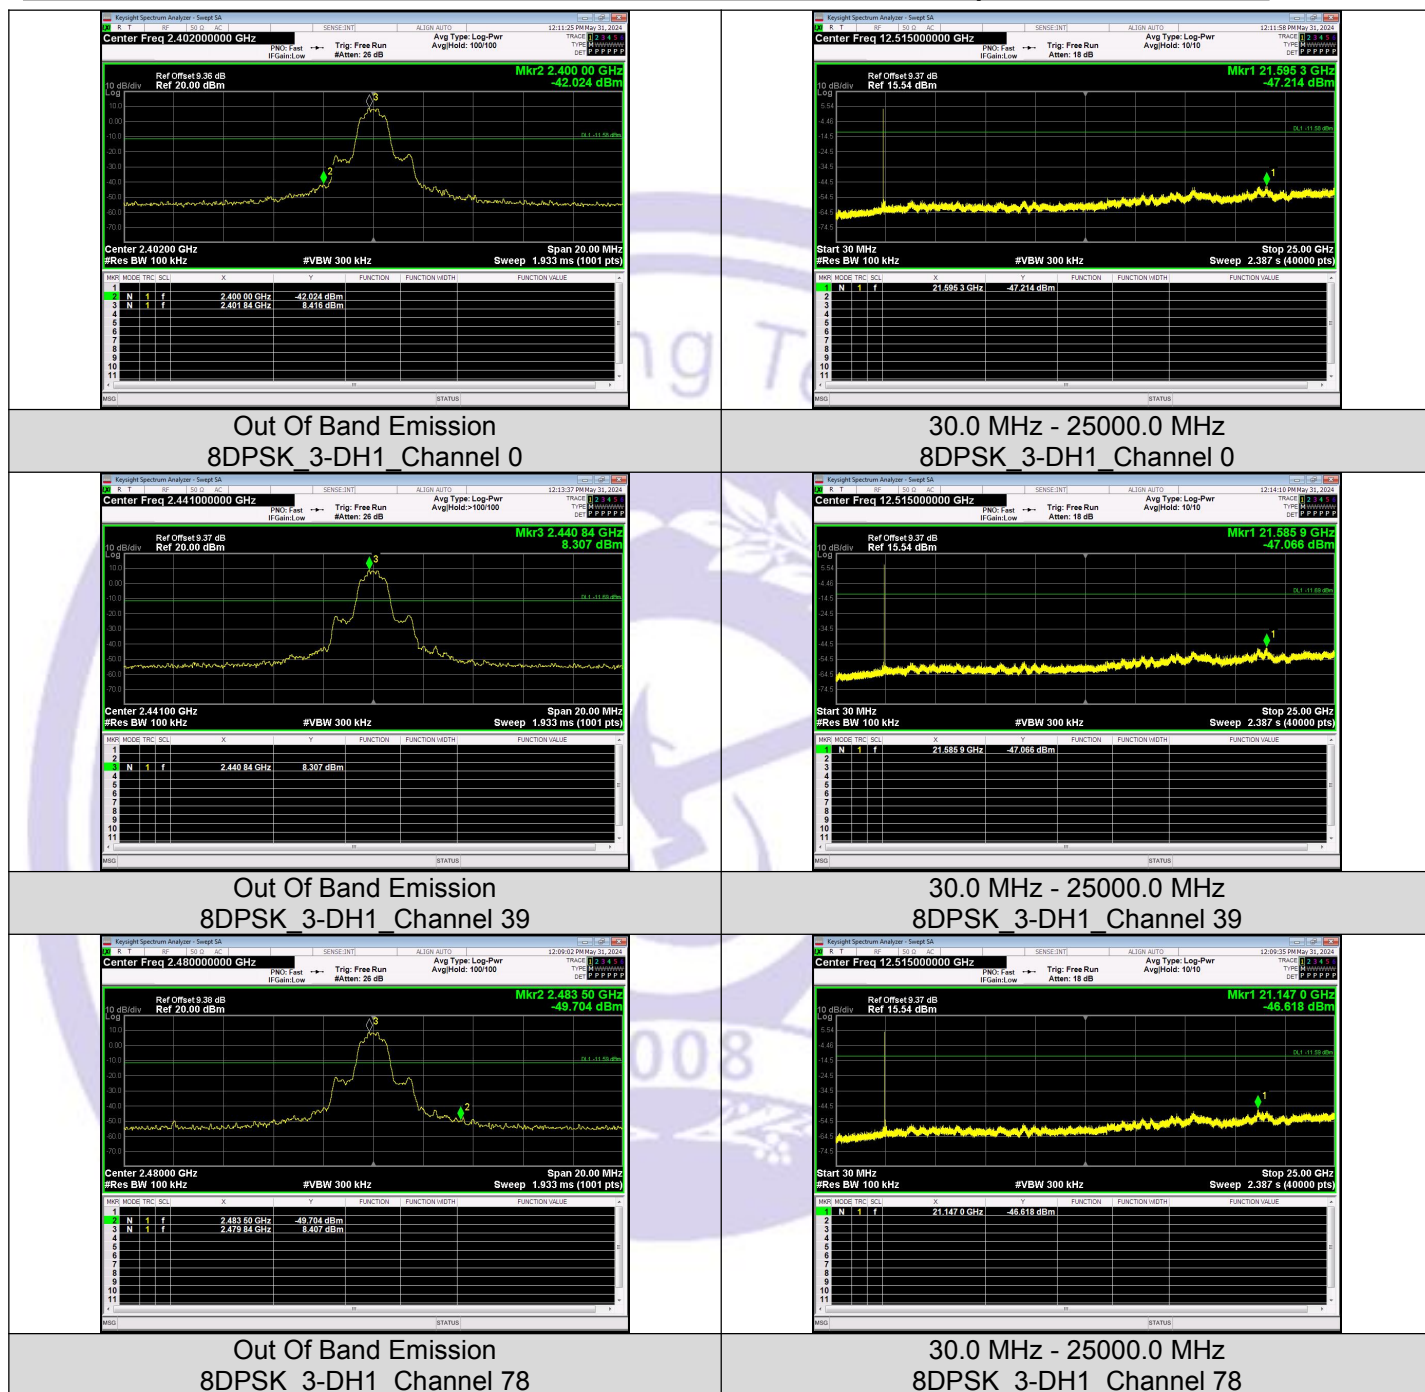


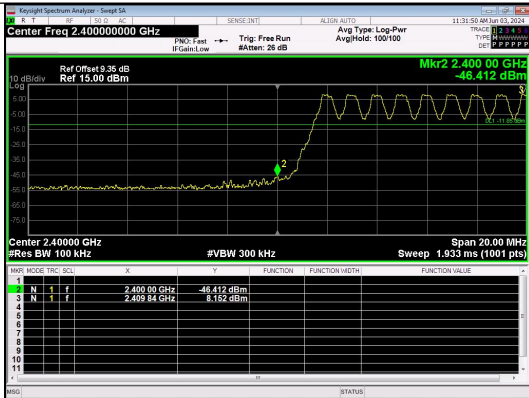


Out Of Band Emission(Left)
GFSK_DH1_Channel Hopping

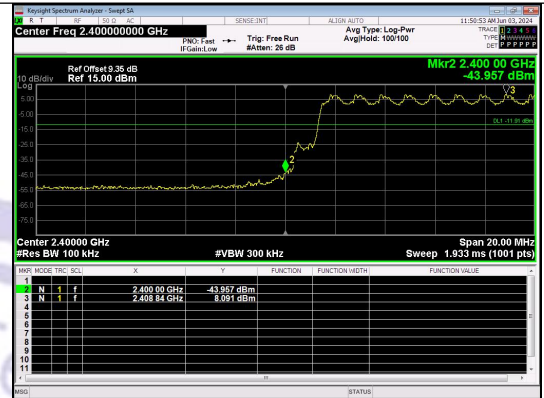


Out Of Band Emission(Left)
 $\pi/4$ DQPSK_2-DH1_Channel Hopping

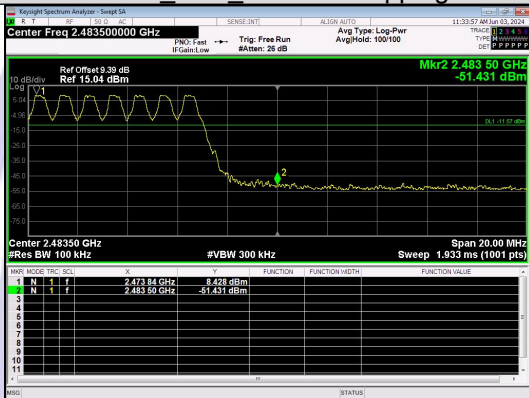


Out Of Band Emission(Right)
GFSK_DH1_Channel Hopping

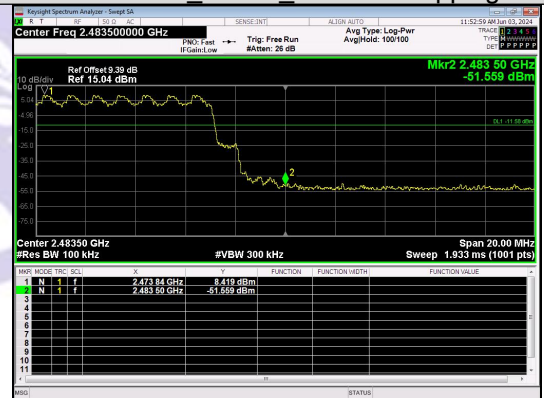

Out Of Band Emission(Right)
 $\pi/4$ DQPSK_2-DH1_Channel Hopping

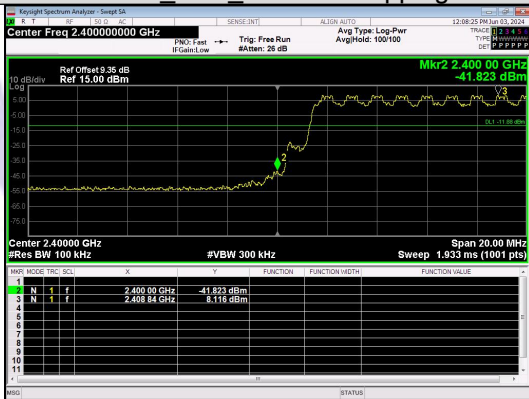

Out Of Band Emission(Left)
8DPSK_3-DH1_Channel Hopping

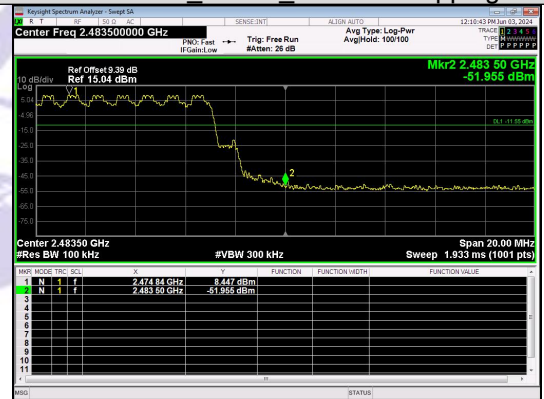

Out Of Band Emission(Right)
8DPSK_3-DH1_Channel Hopping

14 Antenna Requirement

14.1 Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /247(c) & RSS-Gen 6.8
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 2) 15.247(c) (1)(i) requirement: Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

14.2 Antenna Connected Construction

The antenna is PCB Antenna which permanently attached, and the best case gain of the antenna is 0.11dBi. It complies with the standard requirement.

15 APPENDIX I -- TEST SETUP PHOTOGRAPH

Please see the attachment for details.



16 APPENDIX II -- EUT PHOTOGRAPH

Please see the attachment for details.

----- End of Report -----

