



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2423-6, XT2423-1
FCC ID : IHDT56AP1
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Oct. 25, 2023 ~ Nov. 03, 2023

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	6
1.5 Modification of EUT	6
1.6 Specification of Accessory	6
1.7 Testing Location	7
1.8 Test Software	7
1.9 Applicable Standards	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Carrier Frequency and Channel	9
2.2 Test Mode	10
2.3 Connection Diagram of Test System	11
2.4 Support Unit used in test configuration and system	12
2.5 EUT Operation Test Setup	12
2.6 Measurement Results Explanation Example	12
3 TEST RESULT	13
3.1 6dB and 99% Bandwidth Measurement	13
3.2 Output Power Measurement	15
3.3 Power Spectral Density Measurement	16
3.4 Conducted Band Edges and Spurious Emission Measurement	18
3.5 Radiated Band Edges and Spurious Emission Measurement	31
3.6 AC Conducted Emission Measurement	35
3.7 Antenna Requirements	37
4 LIST OF MEASURING EQUIPMENT	38
5 MEASUREMENT UNCERTAINTY	39
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR3O1717C	Rev. 01	Initial issue of report	Nov. 13, 2023

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report Only	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.42 dB at 2389.99 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 12.13 dB at 14.29 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Motorola Mobility LLC

222 W. Merchandise Mart Plaza, Chicago IL 60654, USA

1.2 Manufacturer

Motorola Mobility LLC

222 W. Merchandise Mart Plaza, Chicago IL 60654, USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2423-6, XT2423-1
FCC ID	IHDT56AP1
IMEI Code	Conducted: 357674240009184/357674240013756 Conduction: 357674240008665/357674240013236 Radiation: 357674240008525/357674240013095 for Sample 1 359598830011649/359598830013363 for Sample 2
HW Version	DVT2
SW Version	UTA34.66
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. The two model names are only for market segment purpose, there is no other difference.
3. There are two samples under test, sample 1 is 1st source, sample 2 is 2nd source, the main difference are shown as below table and the detailed differences could be referred to the XT2423-6, XT2423-1_Operational Description of Product Equality Declaration which is exhibit separately. According to the difference, we choose sample 1 to perform full test and the sample 2 verify the RSE worst case.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 20.78 dBm (0.1197 W) 802.11g : 25.11 dBm (0.3243 W) 802.11n HT20 : 25.31 dBm (0.3396 W) 802.11n HT40 : 25.18 dBm (0.3296 W)
99% Occupied Bandwidth	802.11b : 13.54 MHz 802.11g : 17.48 MHz 802.11n HT20 : 18.53 MHz 802.11n HT40 : 37.46 MHz
Antenna Type / Gain	PIFA Antenna type with gain -4.5 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Specification of Accessory

Accessories Information				
AC Adapter 1(US)	Brand Name	Motorola(Salcomp)	Model Name	MC-201L
AC Adapter 1(EU)	Brand Name	Motorola(Salcomp)	Model Name	MC-202L
AC Adapter 1(UK)	Brand Name	Motorola(Salcomp)	Model Name	MC-203L
AC Adapter 1(AR)	Brand Name	Motorola(Salcomp)	Model Name	MC-206L
AC Adapter 1(AU)	Brand Name	Motorola(Salcomp)	Model Name	MC-205L
AC Adapter 2(US)	Brand Name	Motorola(Chenyang)	Model Name	MC-201L
AC Adapter 2(EU)	Brand Name	Motorola(Chenyang)	Model Name	MC-202L
AC Adapter 2(AR)	Brand Name	Motorola(Chenyang)	Model Name	MC-206L
AC Adapter 3(US)	Brand Name	Motorola(AOHAI)	Model Name	MC-201L
AC Adapter 3(EU)	Brand Name	Motorola(AOHAI)	Model Name	MC-202L
AC Adapter 3(UK)	Brand Name	Motorola(AOHAI)	Model Name	MC-203L
AC Adapter 3(AR)	Brand Name	Motorola(AOHAI)	Model Name	MC-206L
AC Adapter 3(AU)	Brand Name	Motorola(AOHAI)	Model Name	MC-205L
Battery 1	Brand Name	Motorola(ATL)	Model Name	QF50
Battery 2	Brand Name	Motorola(sunwoda)	Model Name	QF50
USB Cable 1	Brand Name	Motorola(Juwei)	Model Name	JWUB1614-T03H
USB Cable 2	Brand Name	Motorola(saibao)	Model Name	STN-A128A



1.7 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-SZ TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH01-SZ	CN1256	421272

1.8 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24
2.	CO01-SZ	AUDIX	E3	6.120613b



1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-



2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.


Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

Test Cases	
AC Conducted Emission	Mode 1 :GSM 850 Idle + WLAN Link(2.4G) + Adapter 2 + USB Cable 1 + Battery 1 + Earphone
Remark: For Radiated Test Cases, The tests were performance with Adapter 1, Earphone 1,and USB Cable1	


RSE Co-location
802.11n CH01 2412 + LTE Band13 Link

2.3 Connection Diagram of Test System

AC Conducted Emission:

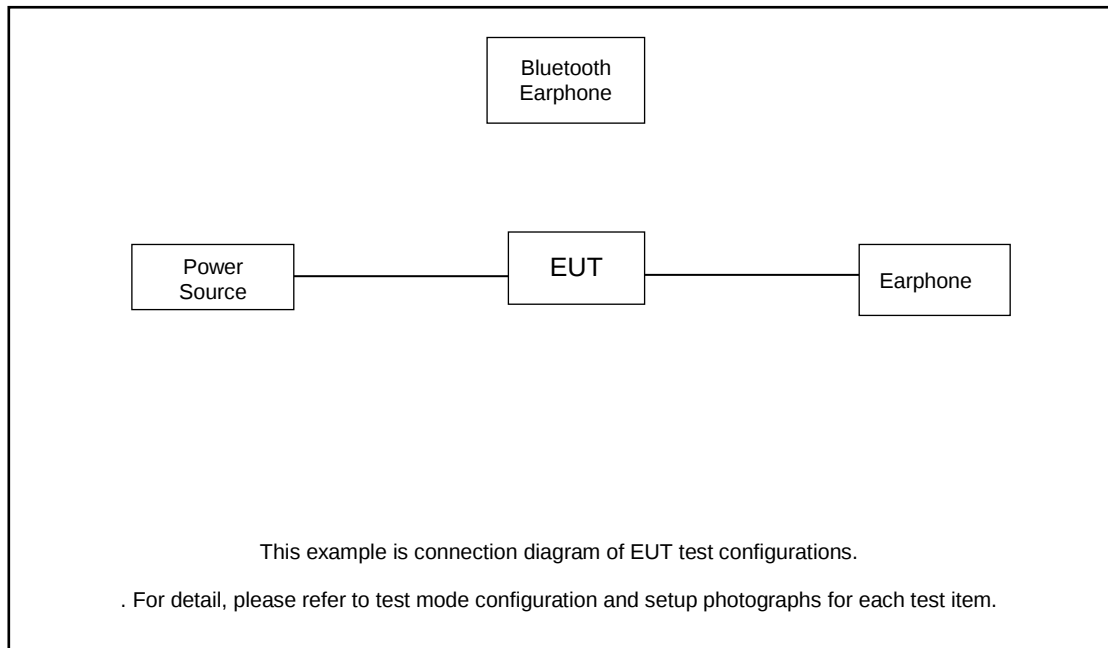

Radiated Emission:

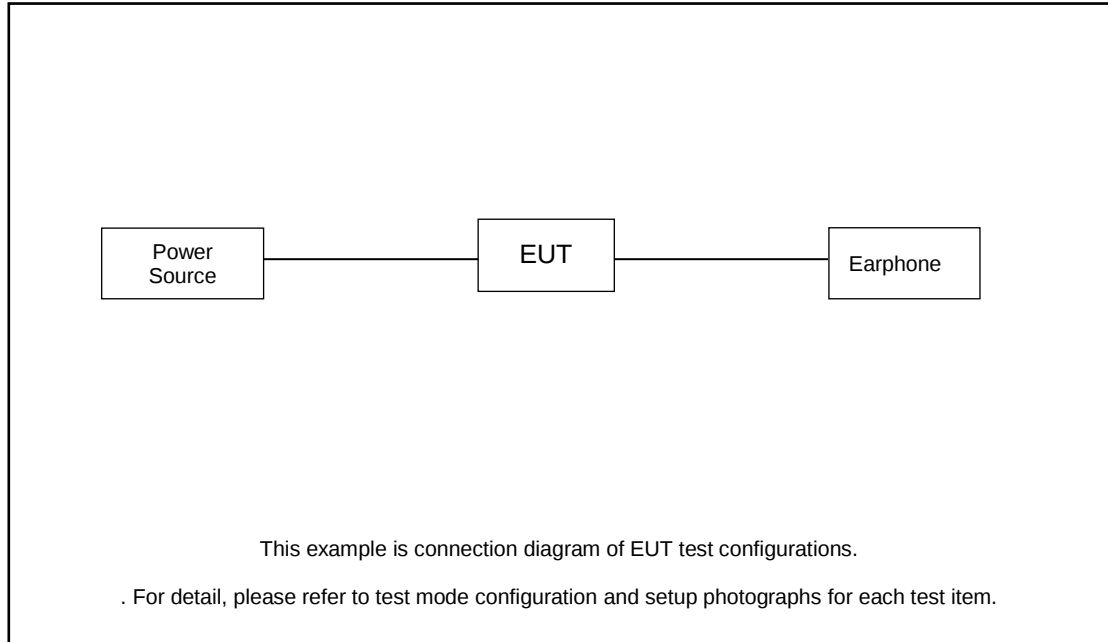



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station(LTE)	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	Base Station	Anritsu	MT8821C	N/A	N/A	N/A
3.	Earphone	apple	DCAY1V-A900FZJW3-000	N/A	N/A	N/A
4.	Earphone	sony	MT755	N/A	Fcc DoC	N/A
5.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A
6.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 13.60 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 13.60 + 10 = 23.60 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1%~5% of OBW and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.


3.1.4 Test Setup

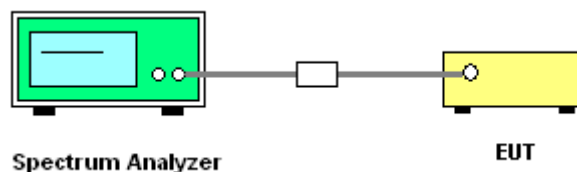



3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

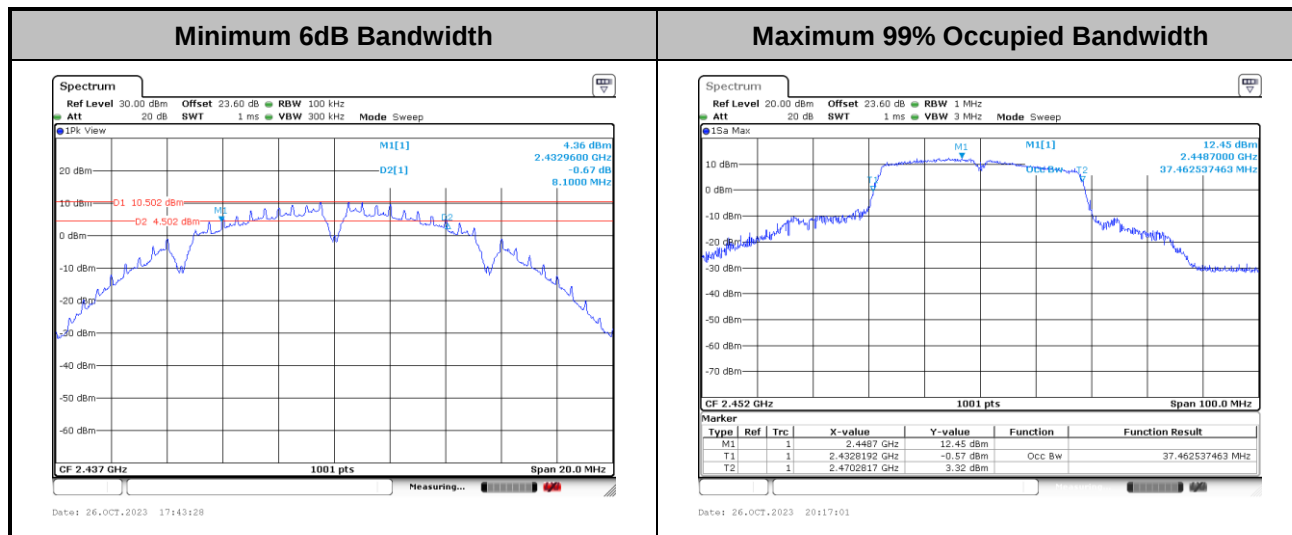

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

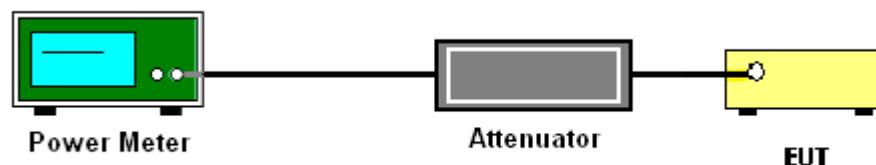

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

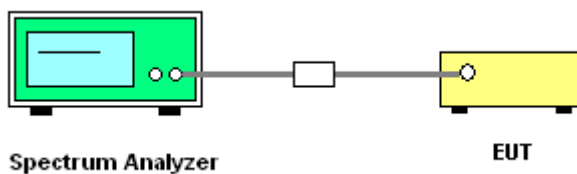

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

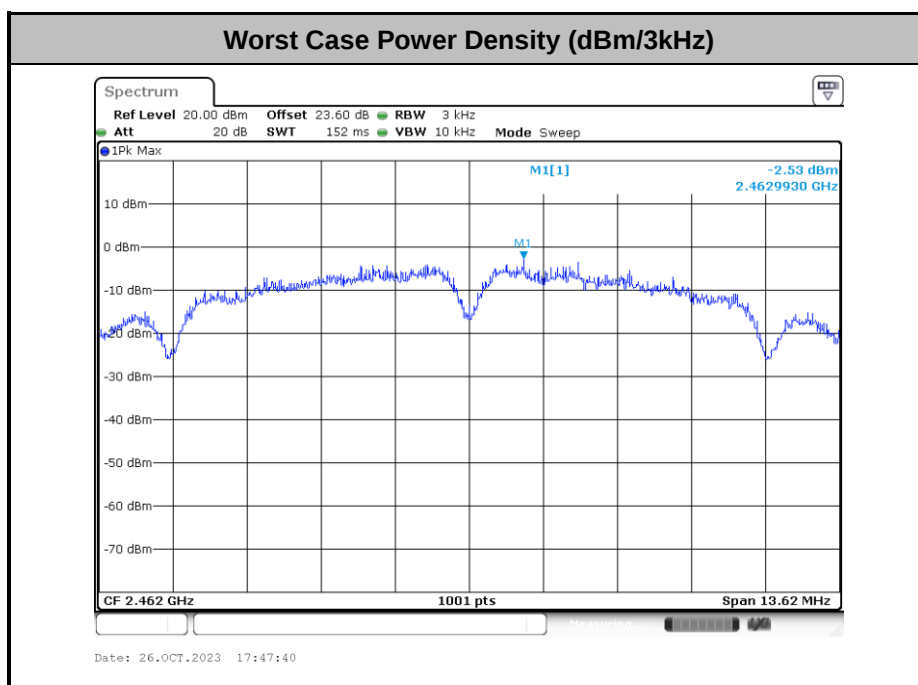

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.11
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

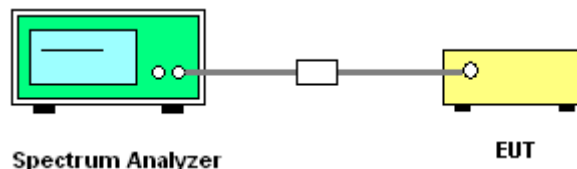




3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Engineer :	Zhang Jiang	Temperature :	24~26°C
		Relative Humidity :	50~53%

Number of TX = 1, Ant. 1 (Measured)


Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

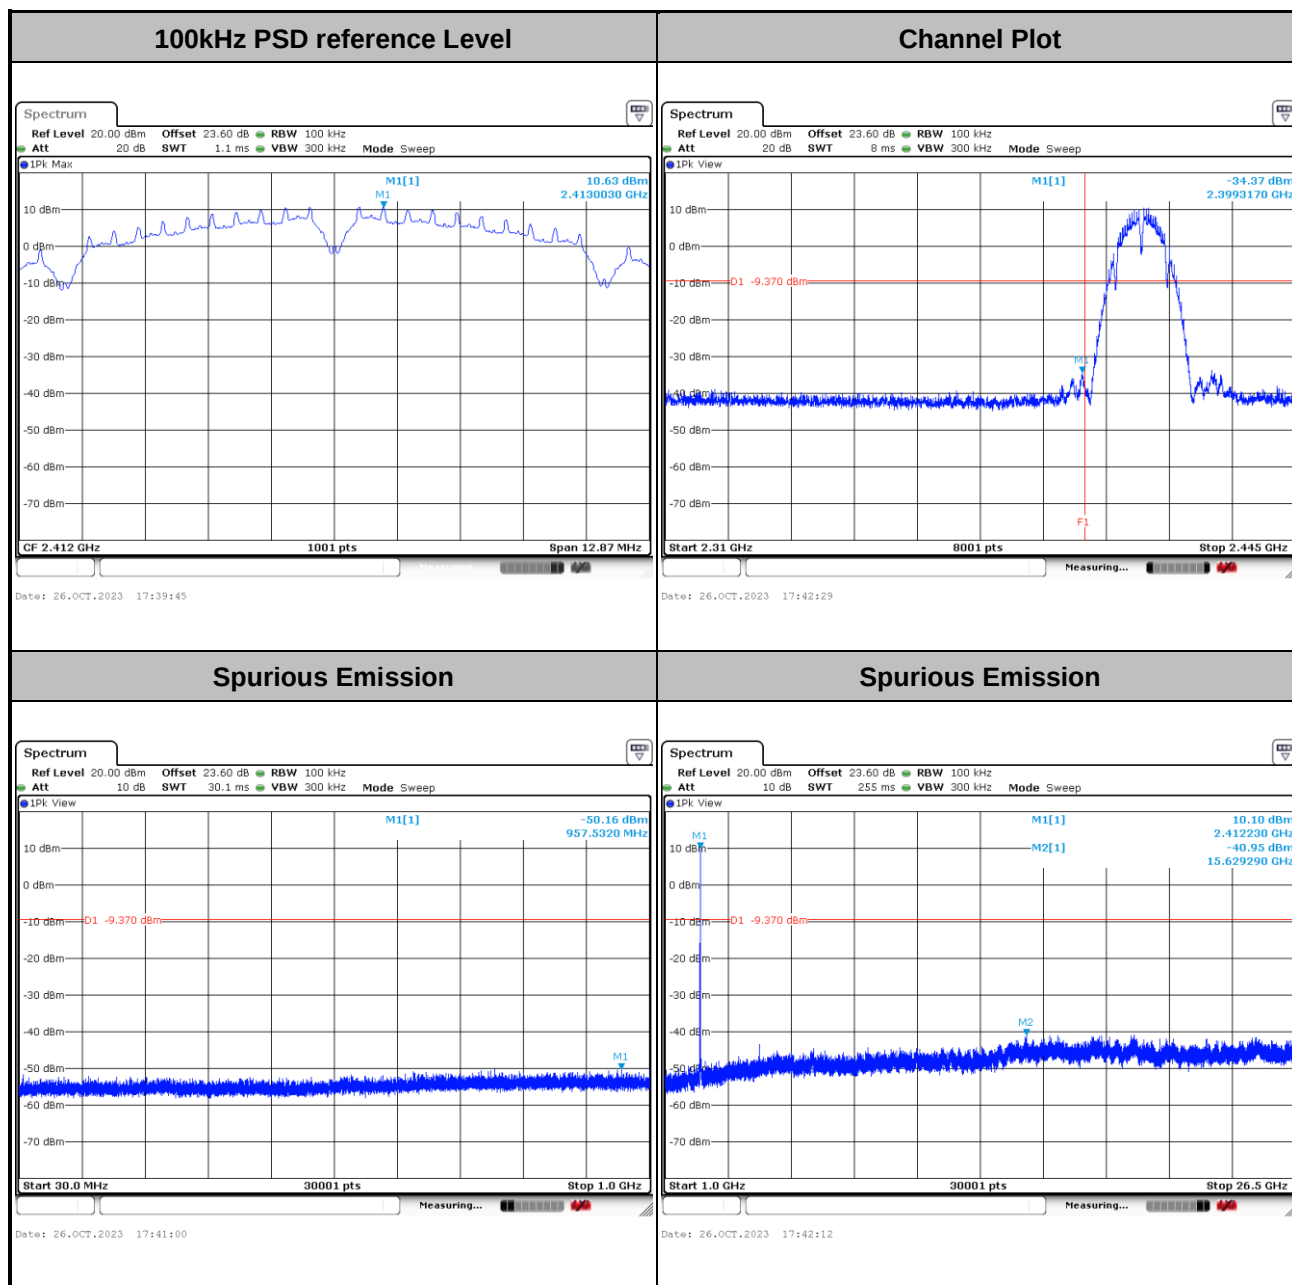



Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----


100kHz PSD reference Level

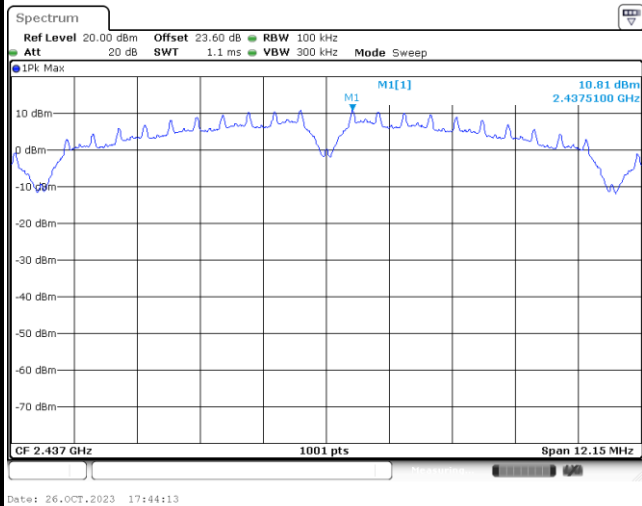


Channel Plot

NA

Spurious Emission

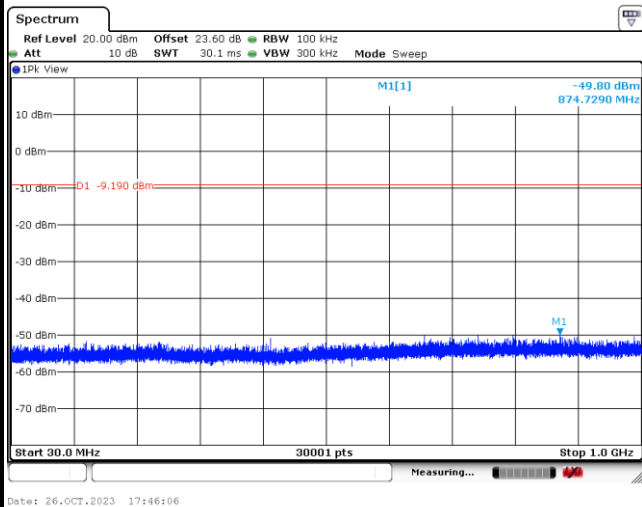


Spurious Emission

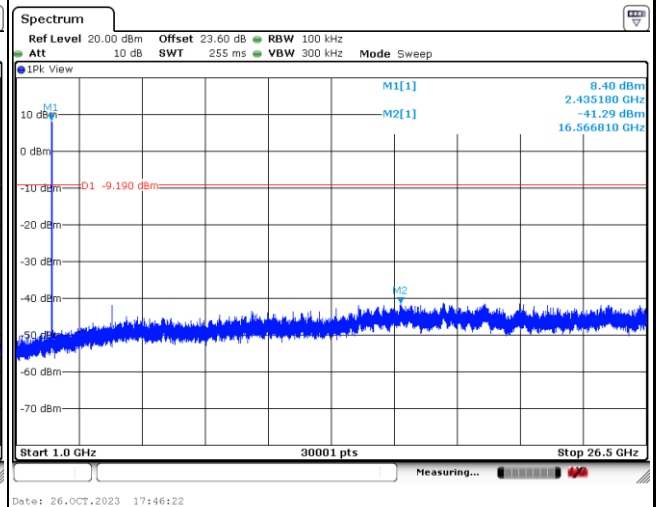




Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

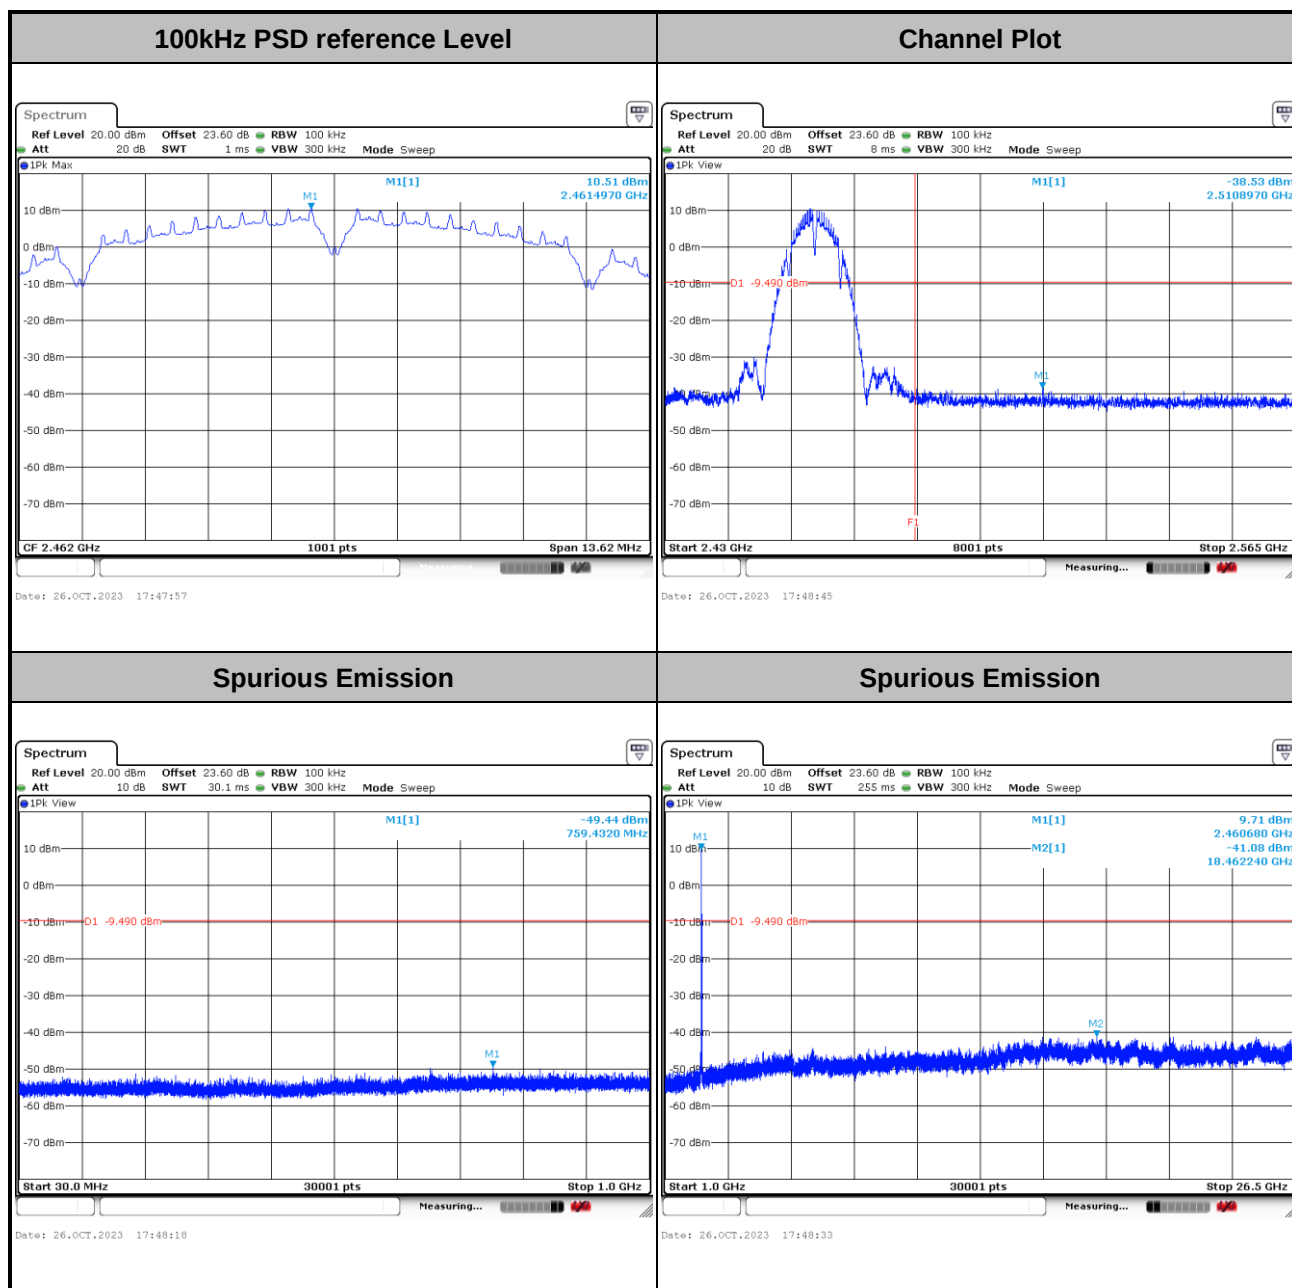




Test Mode :	802.11g	Test Channel :	01
-------------	---------	----------------	----


100kHz PSD reference Level

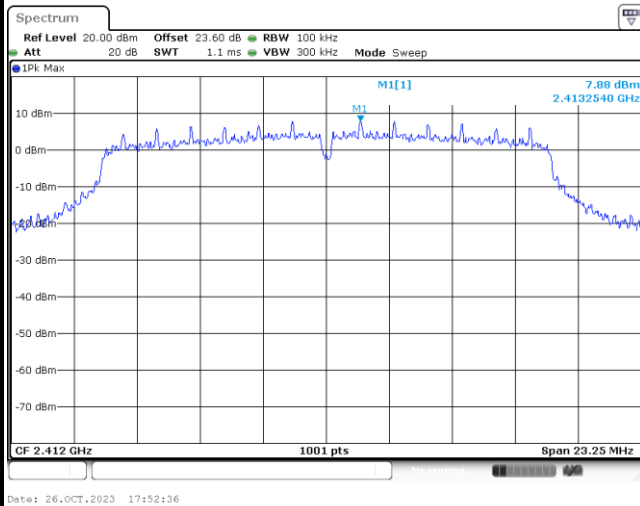


Channel Plot

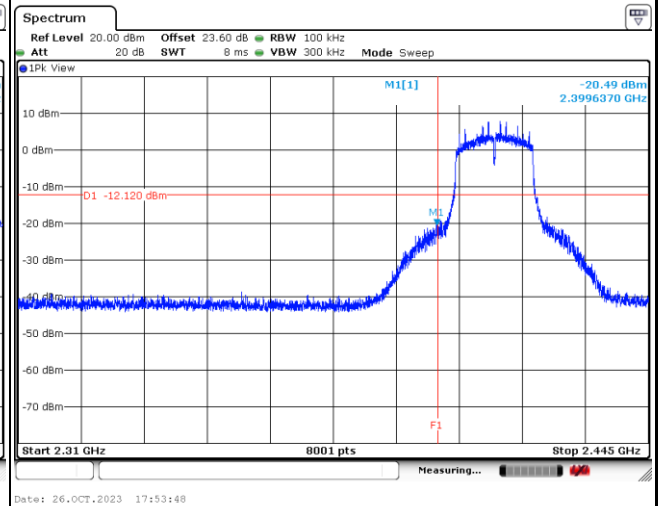

Spurious Emission

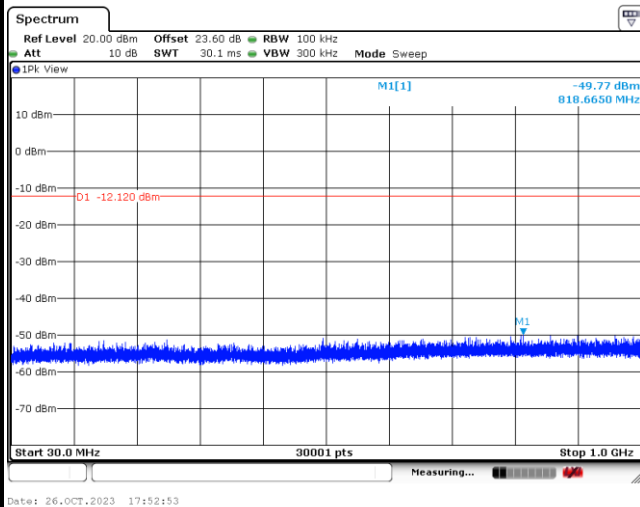


Spurious Emission

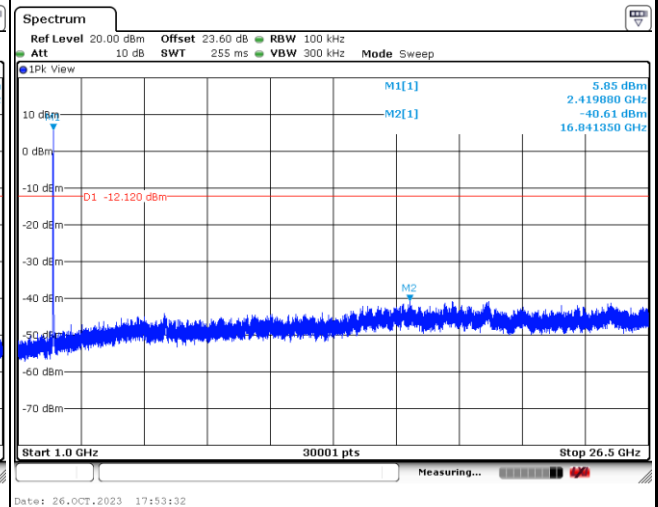




Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

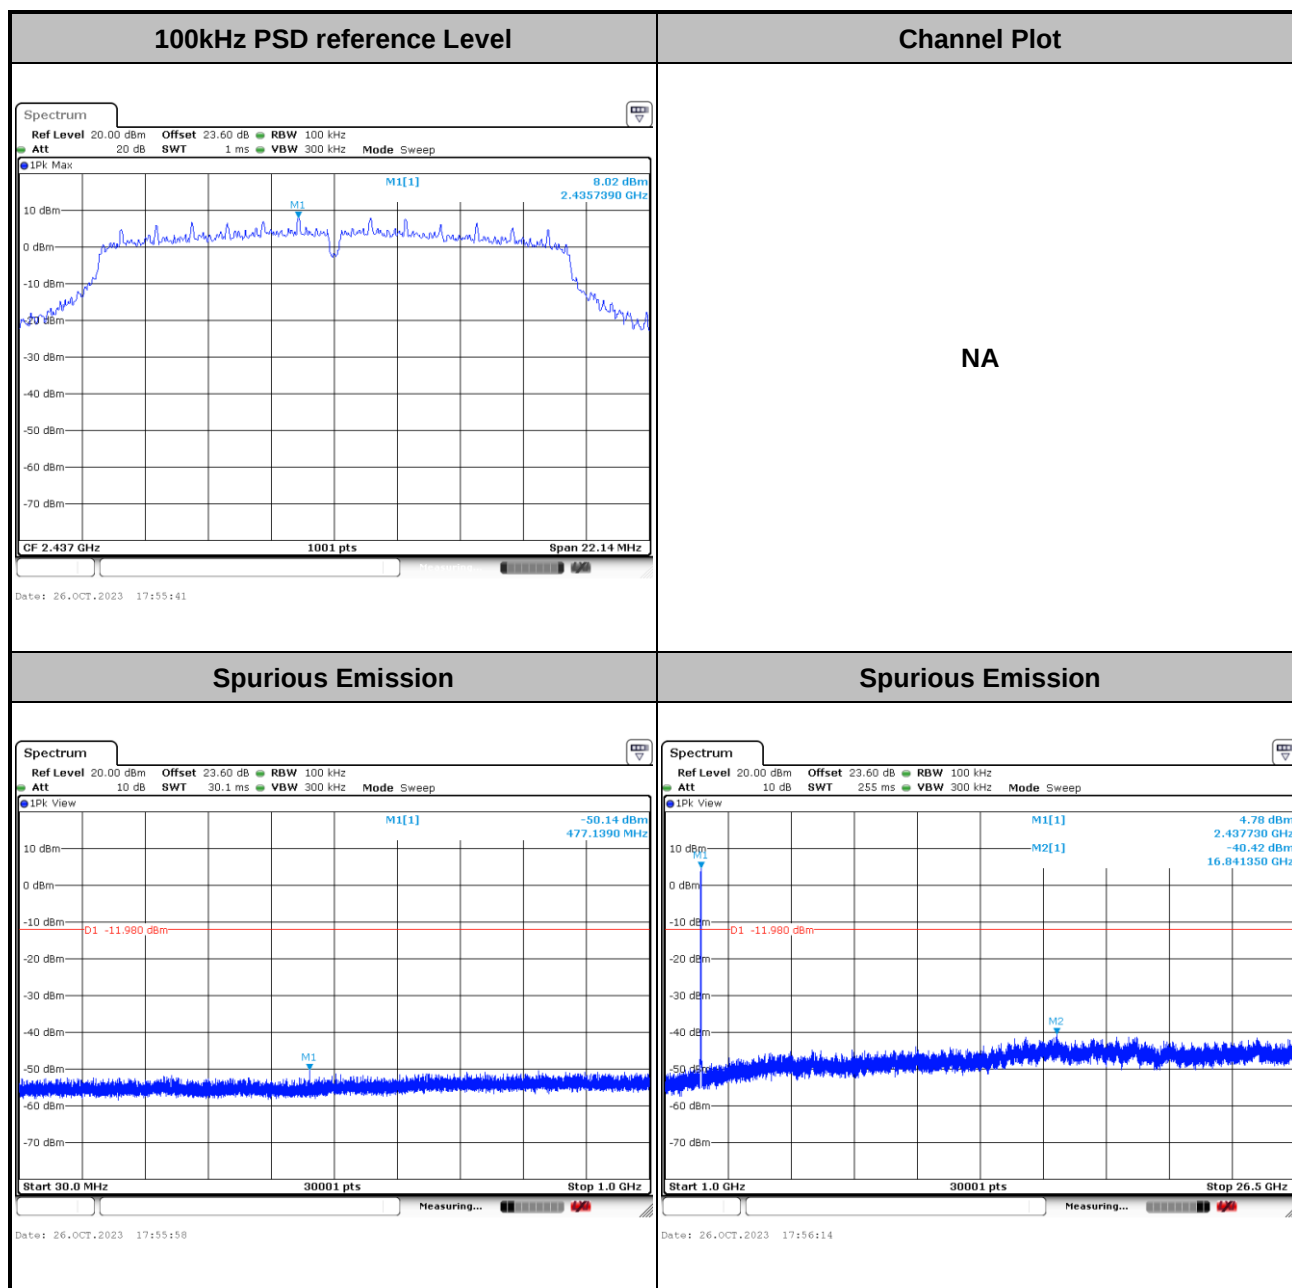




Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

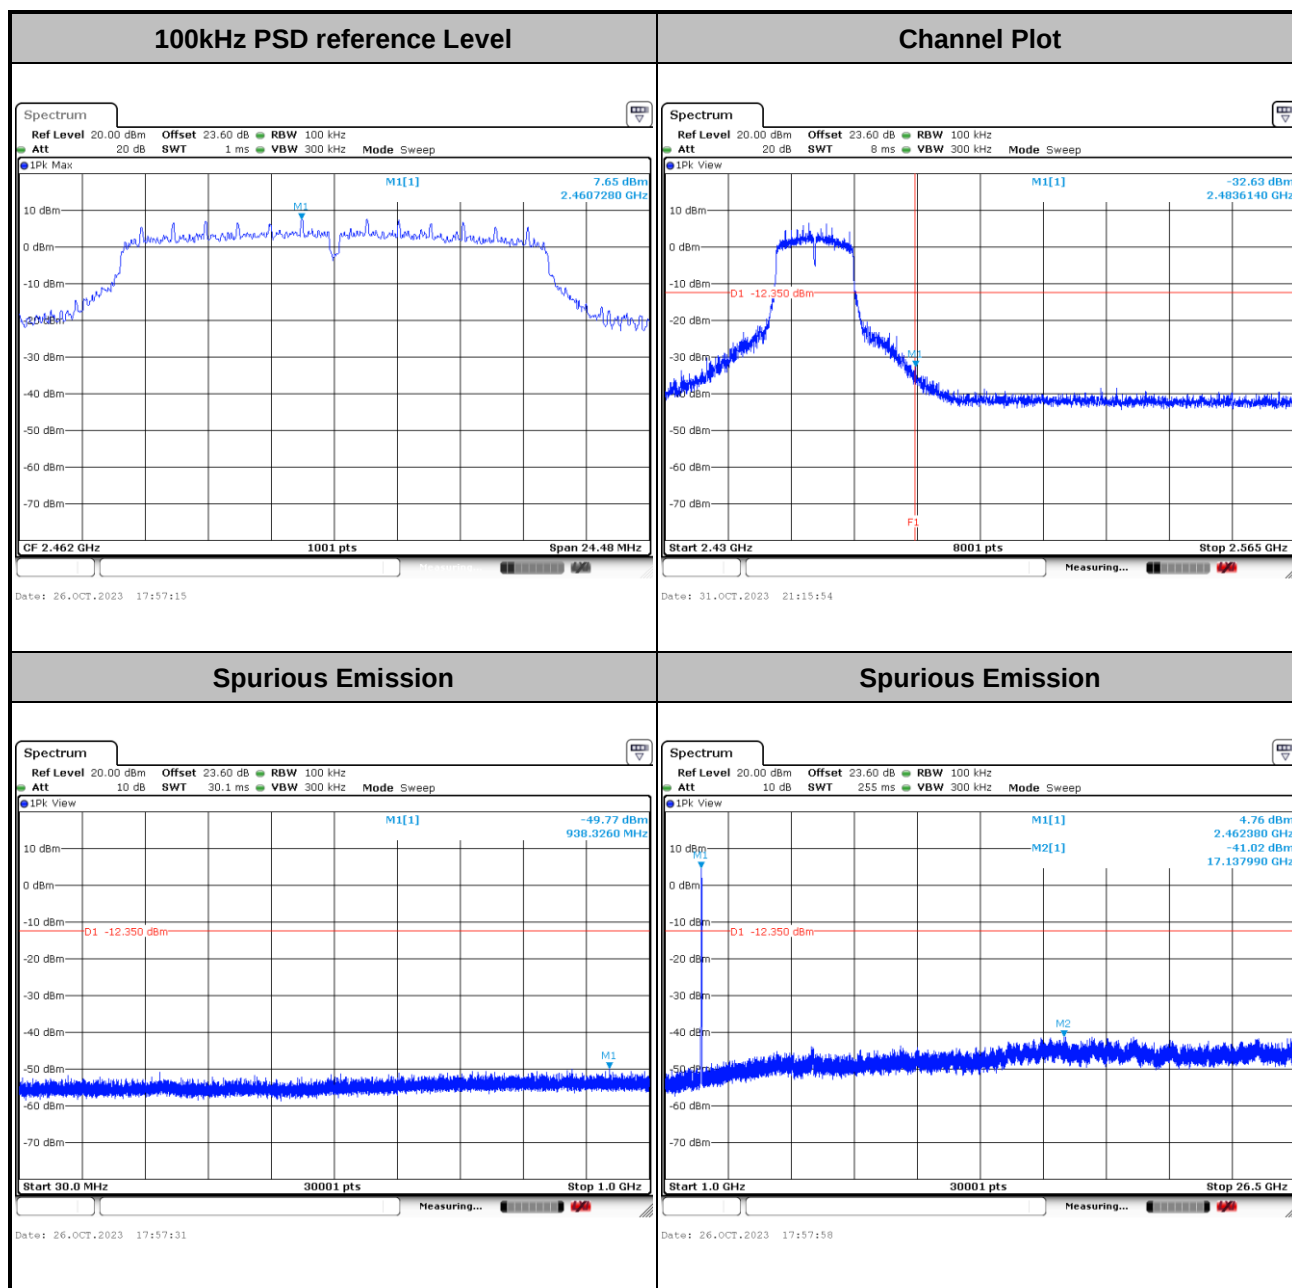




Test Mode :	802.11n HT20	Test Channel :	01
-------------	--------------	----------------	----

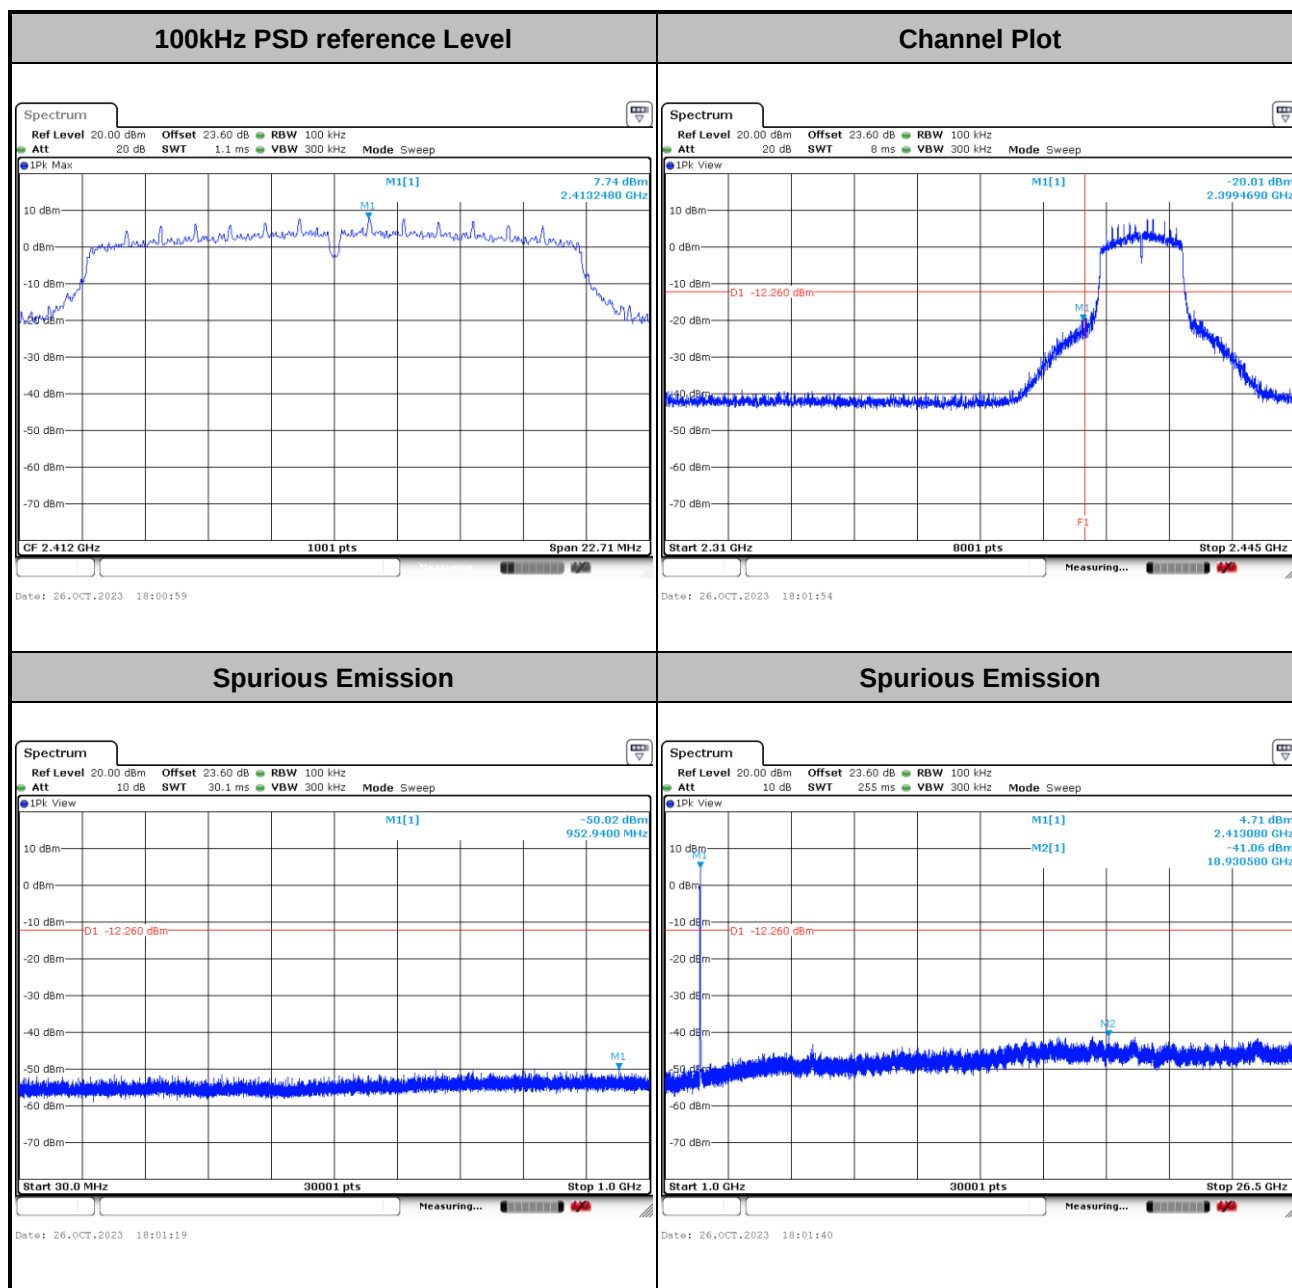




Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----

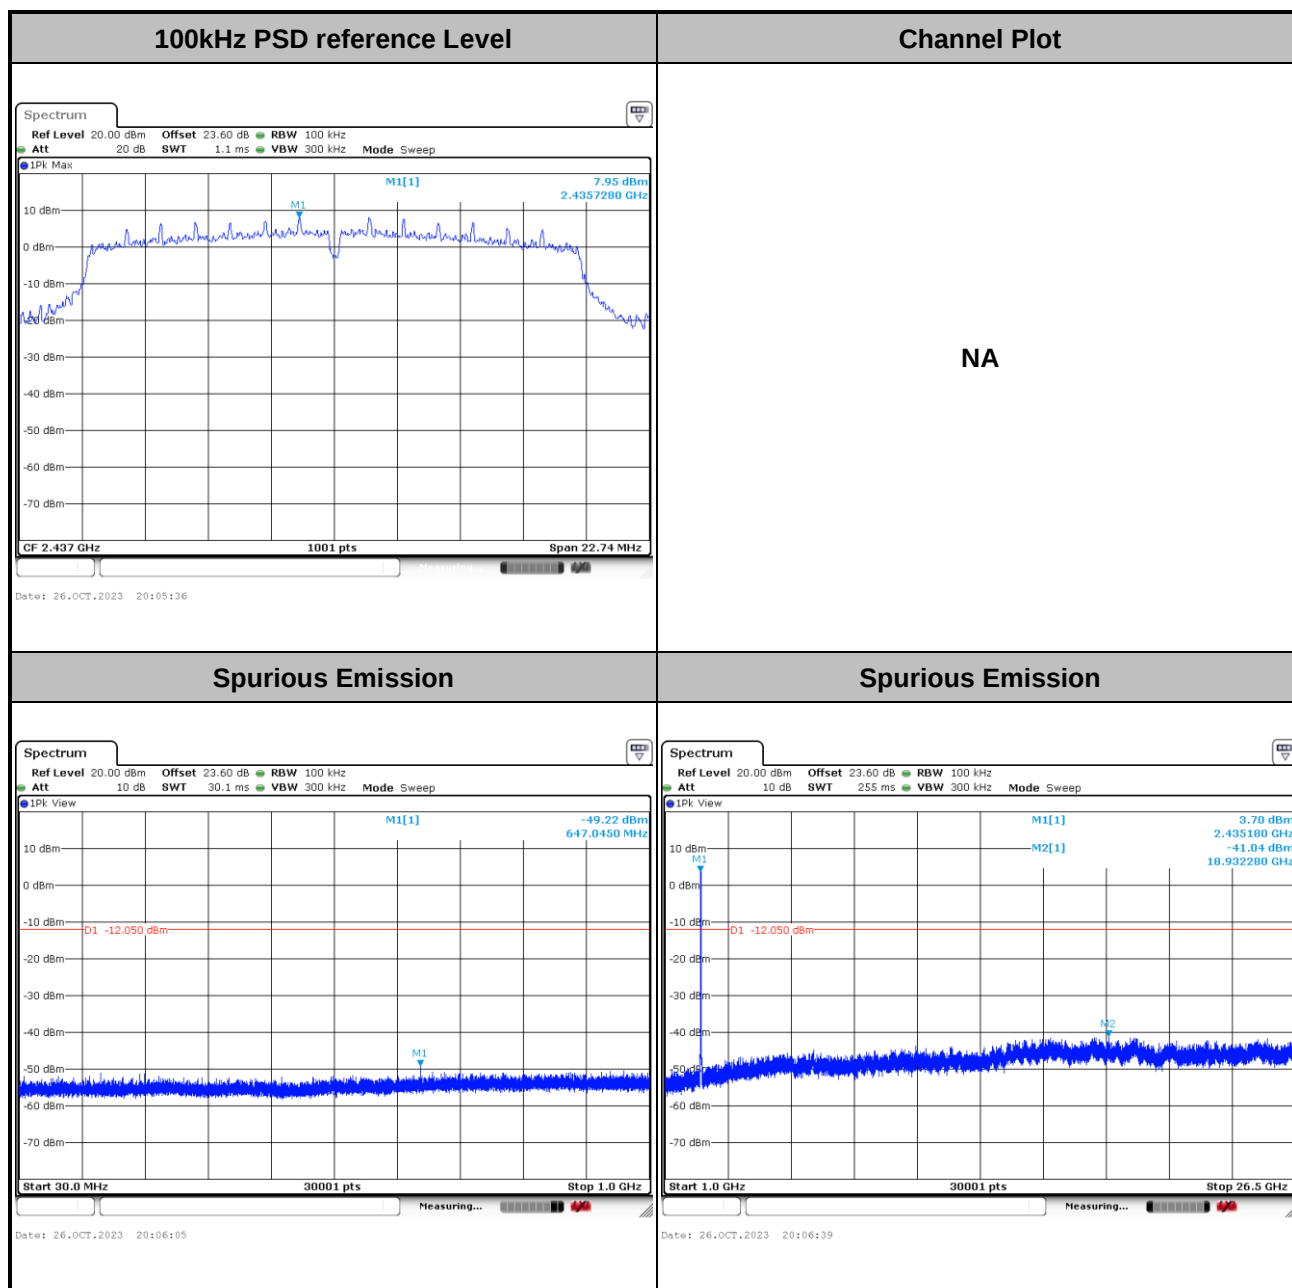




Test Mode :	802.11n HT20	Test Channel :	11
-------------	--------------	----------------	----

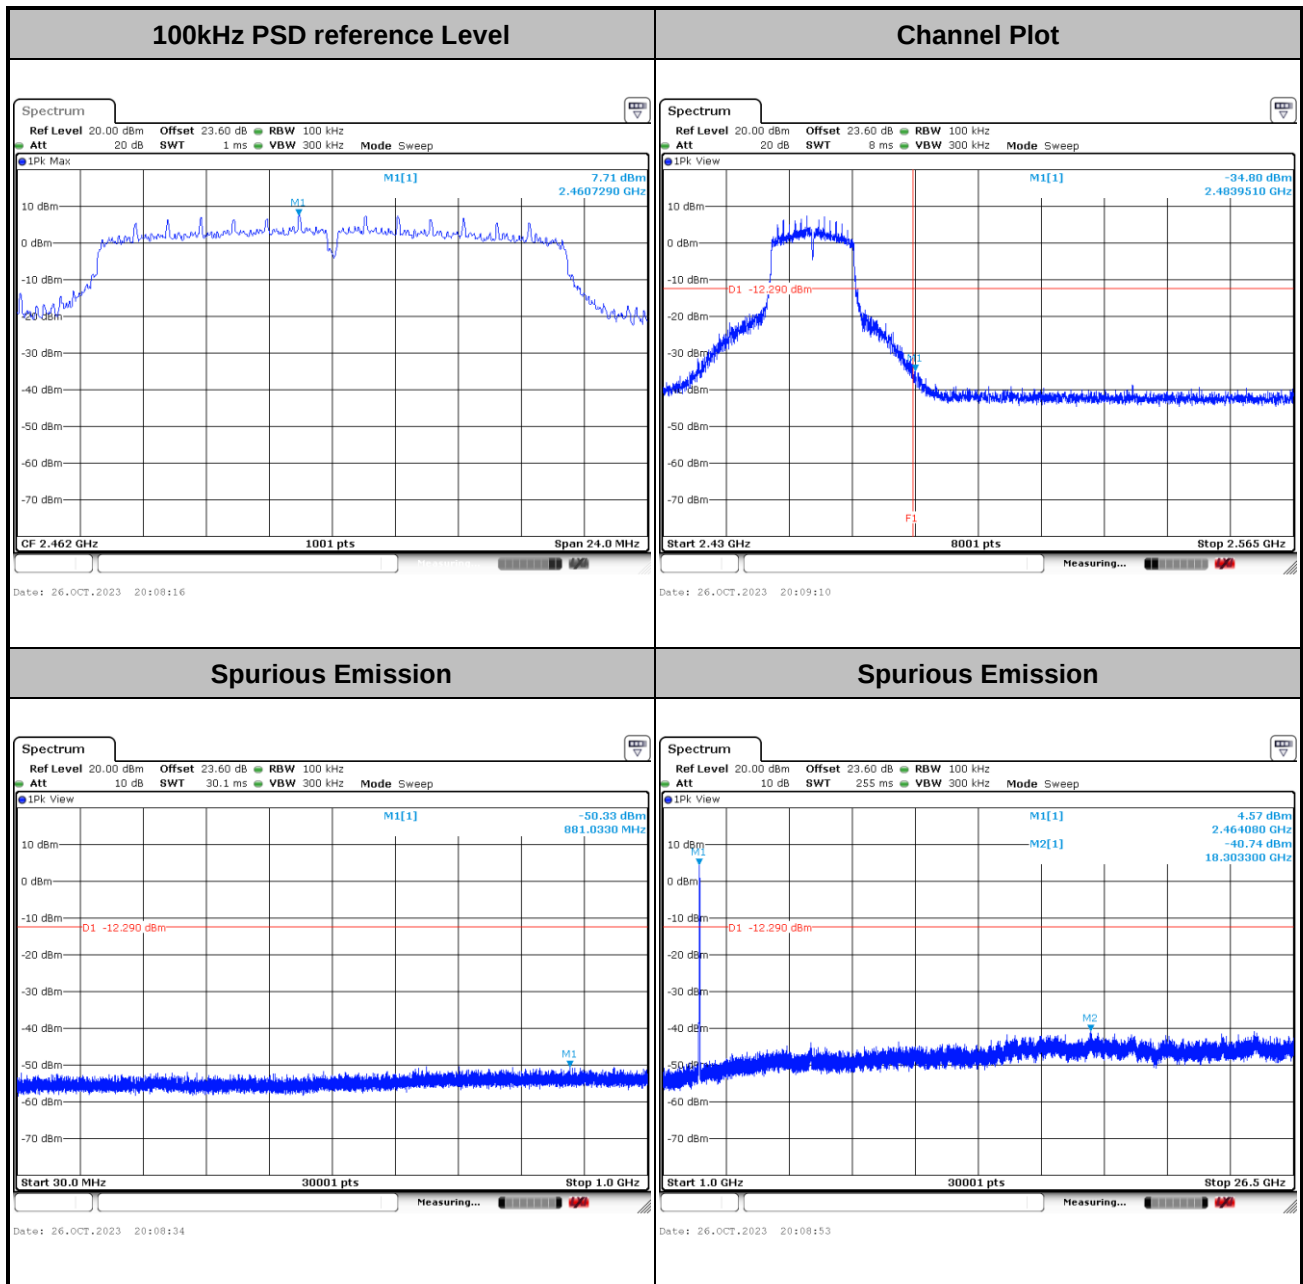




Test Mode :	802.11n HT40	Test Channel :	03
-------------	--------------	----------------	----

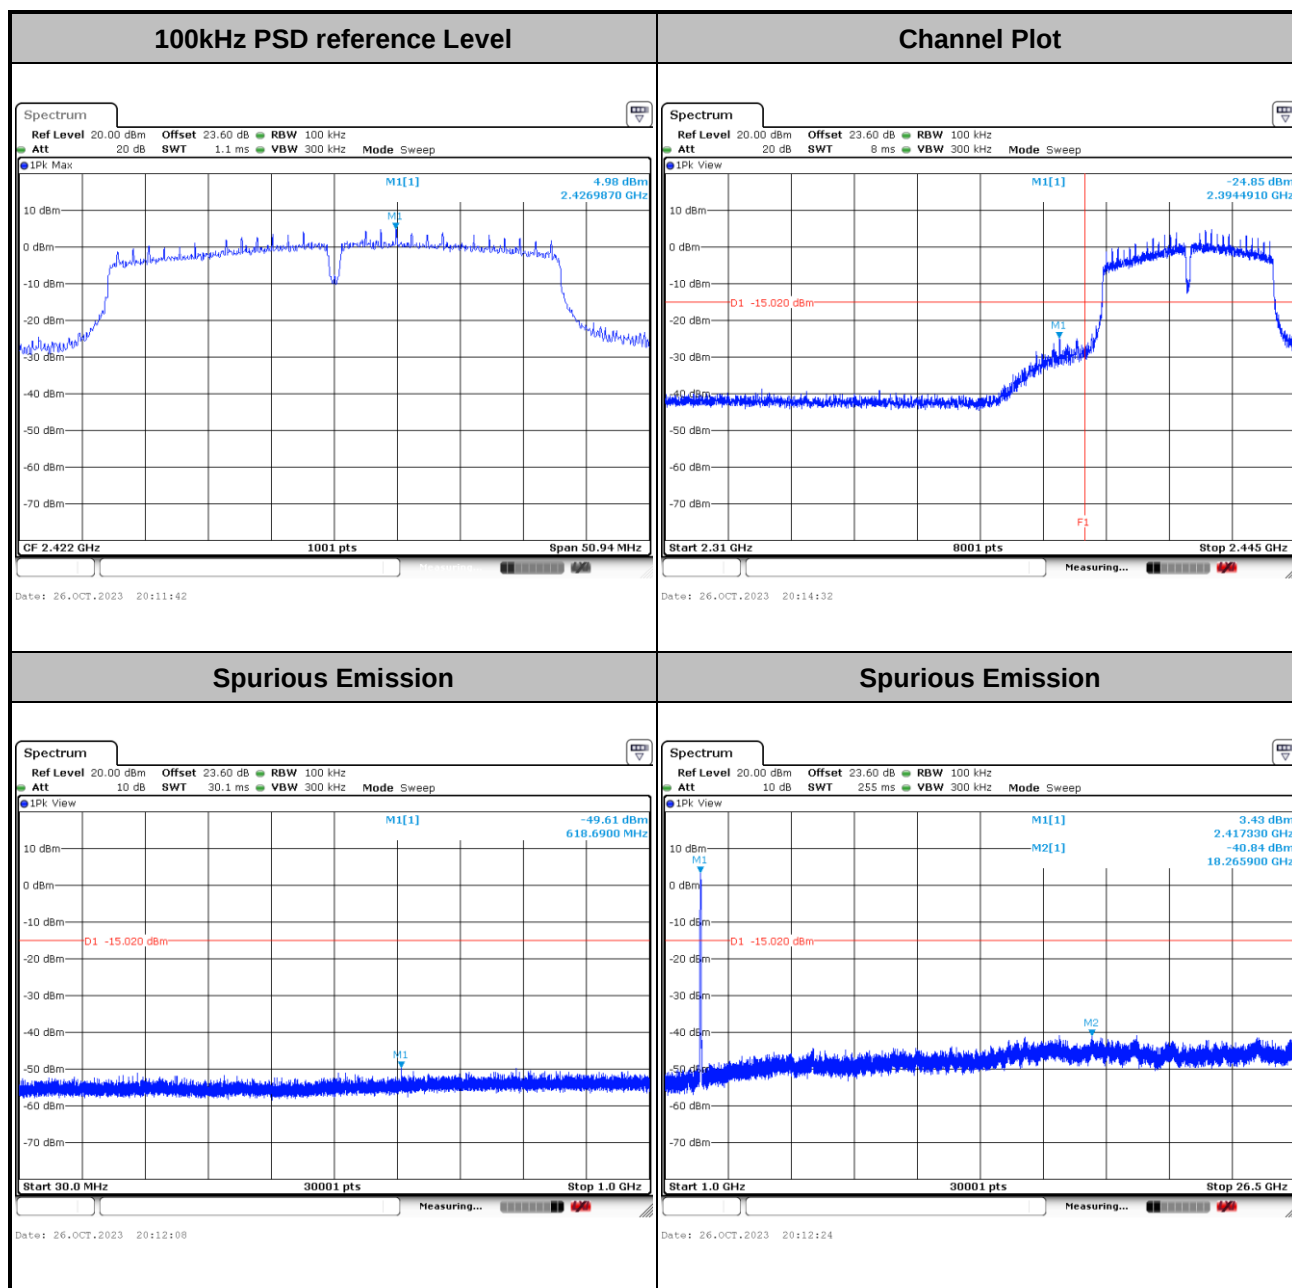



Test Mode :	802.11n HT40	Test Channel :	06
-------------	--------------	----------------	----


100kHz PSD reference Level

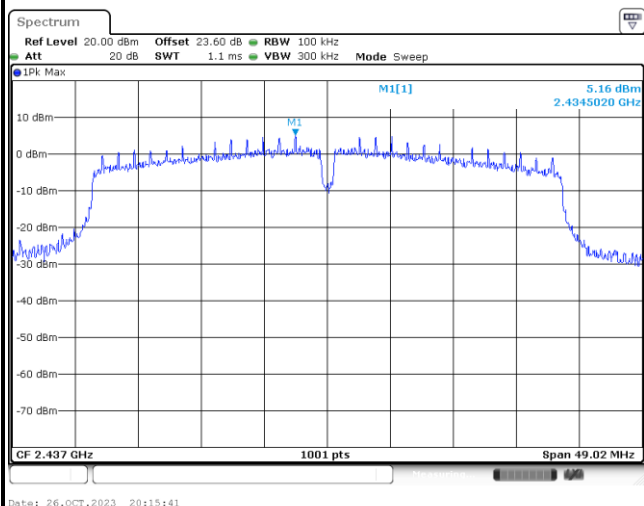


Channel Plot

NA

Spurious Emission

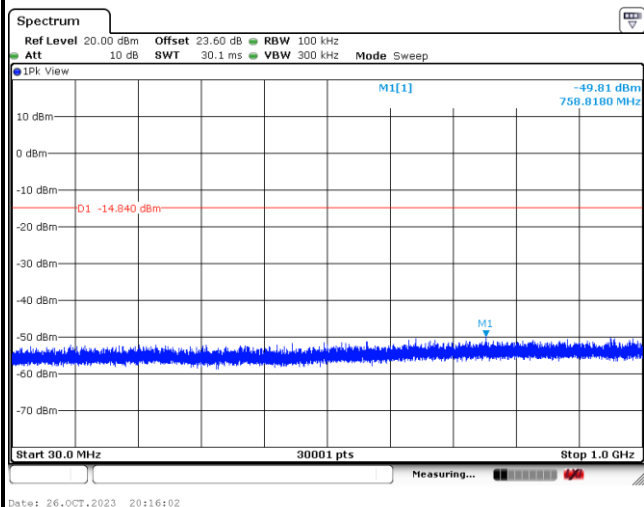


Spurious Emission

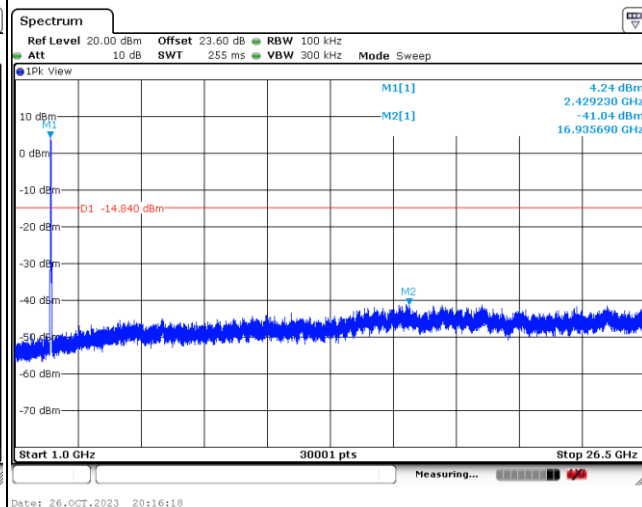



Test Mode :	802.11n HT40	Test Channel :	09
-------------	--------------	----------------	----

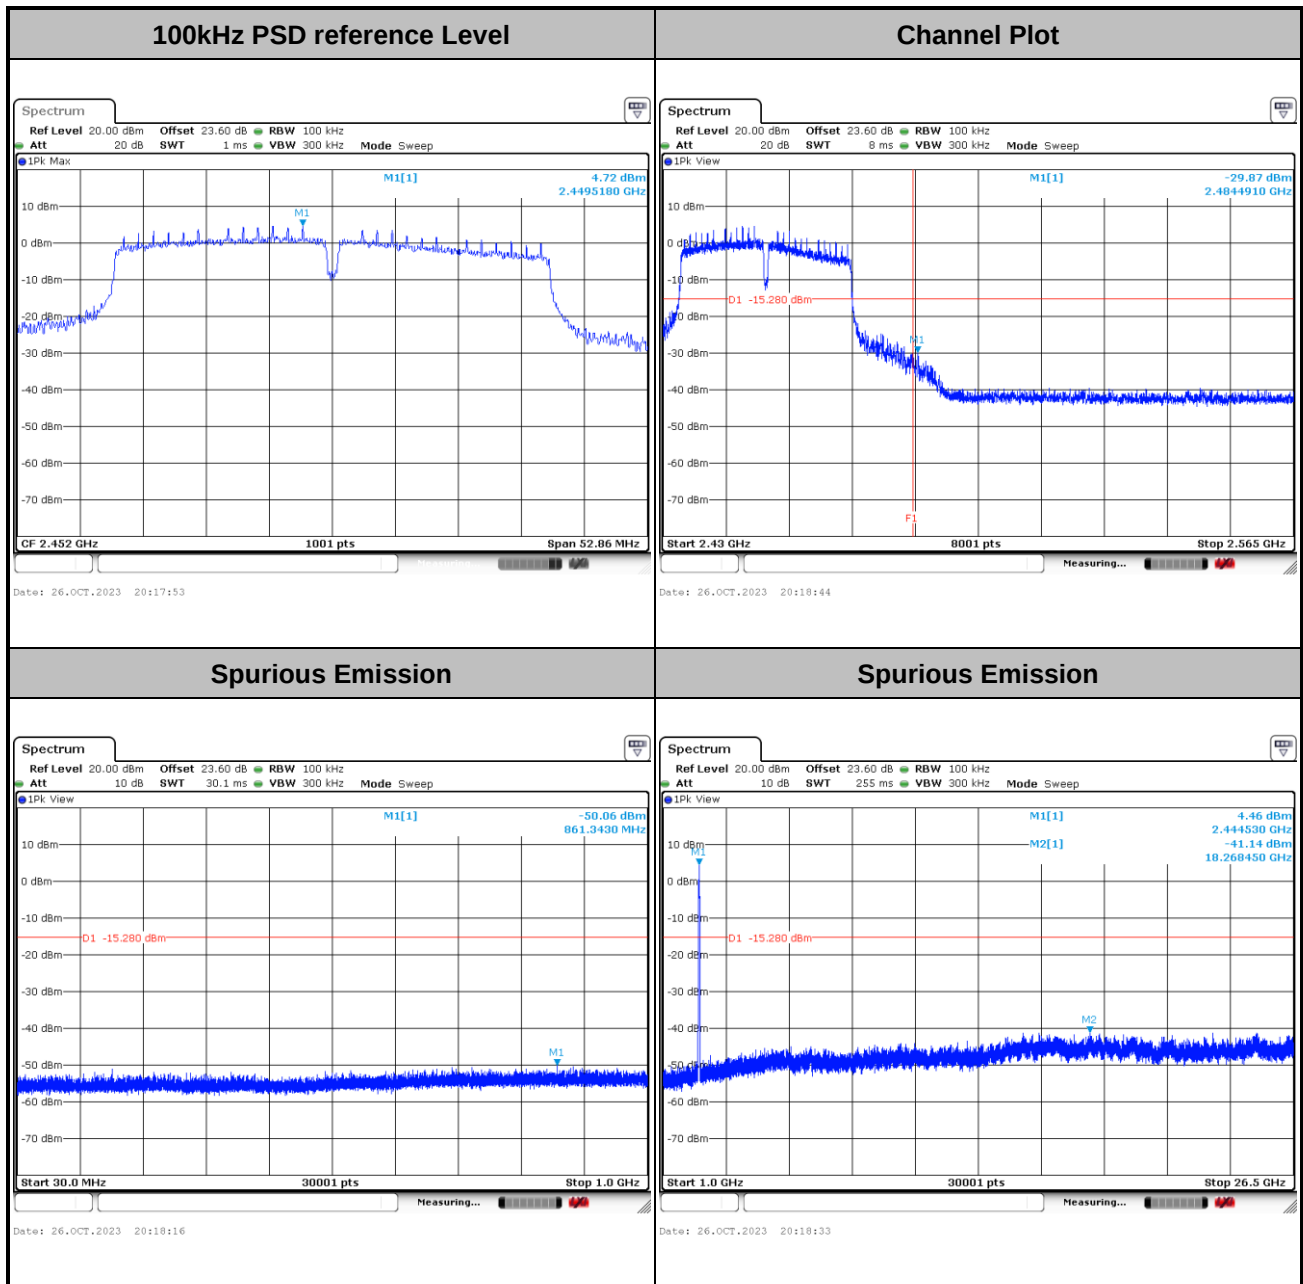

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

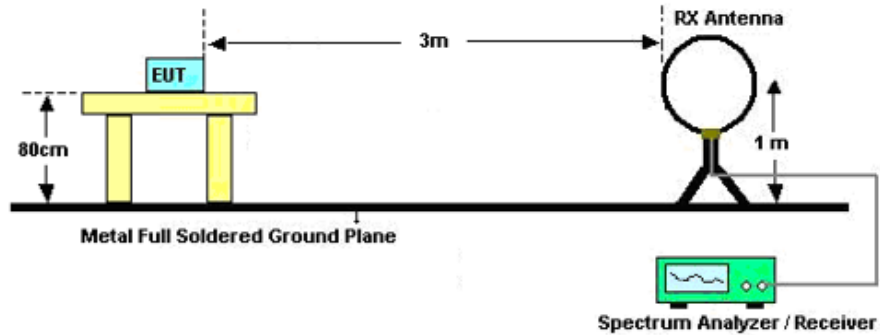

For radiated emissions from 30MHz to 1GHz

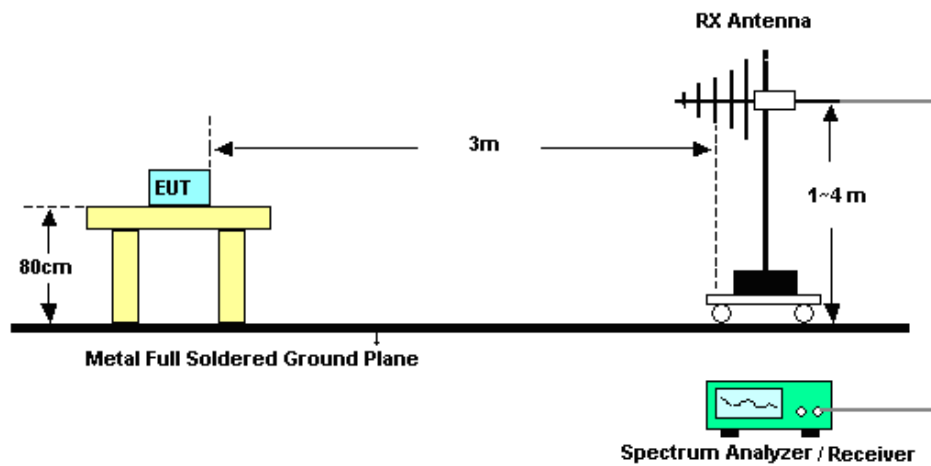

For radiated emissions above 1GHz

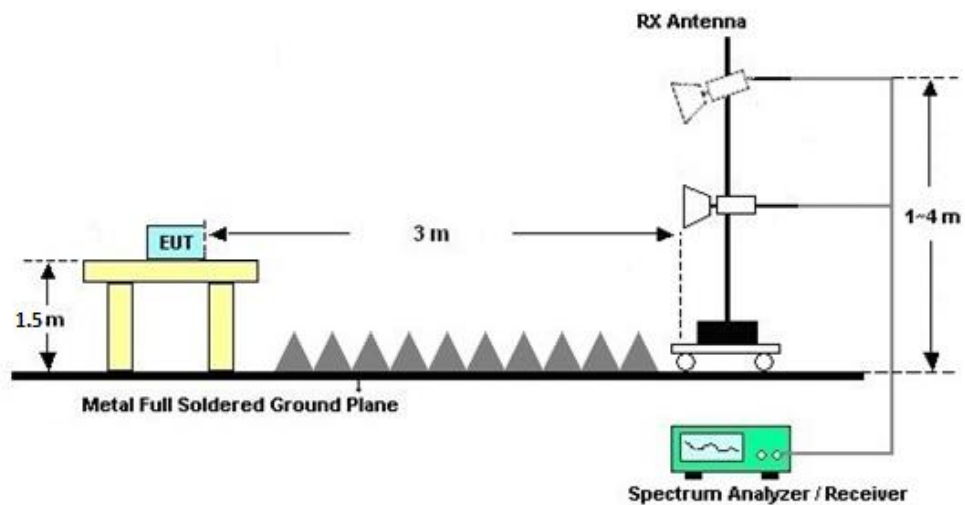

**3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

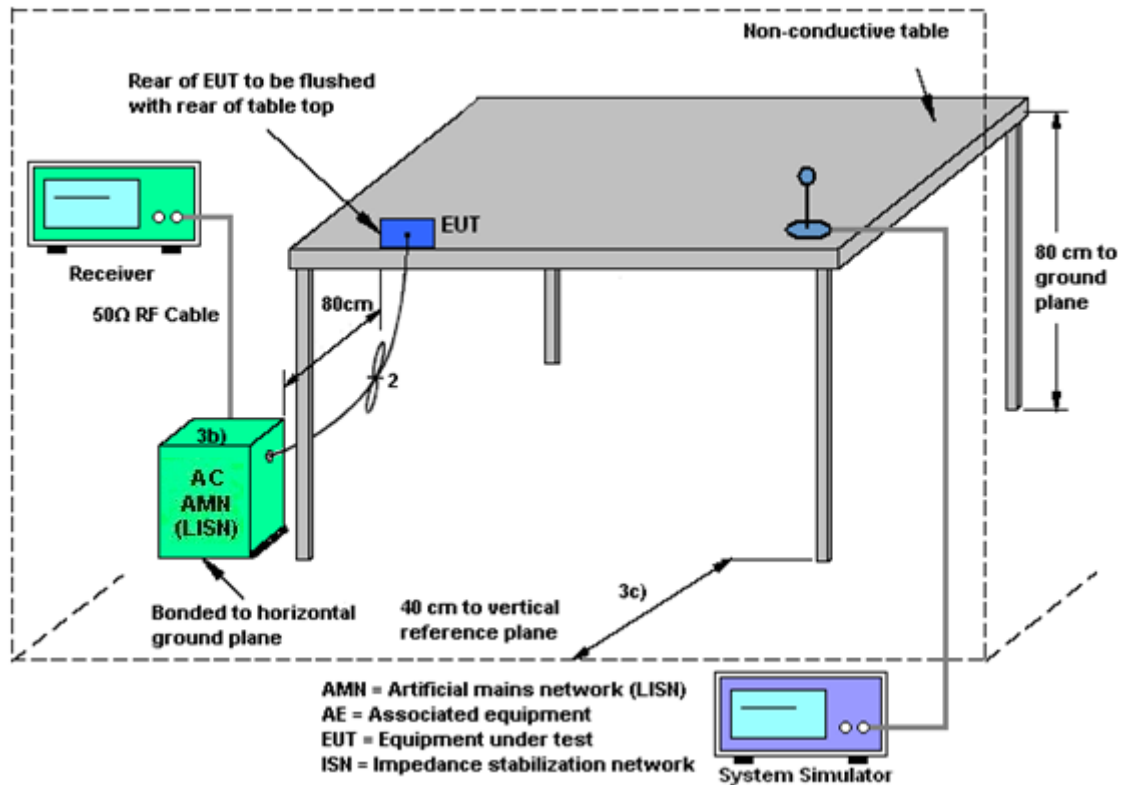

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 26, 2022	Oct. 25, 2023~Nov. 03, 2023	Dec. 25, 2023	Radiation (03CH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 07, 2023	Oct. 25, 2023~Nov. 03, 2023	Jul. 06, 2024	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jul. 28, 2022	Oct. 25, 2023~Nov. 03, 2023	Jul. 27, 2024	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Oct. 24, 2023	Oct. 25, 2023~Nov. 03, 2023	Oct. 23, 2025	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 08, 2023	Oct. 25, 2023~Nov. 03, 2023	Jul. 07, 2024	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 08, 2023	Oct. 25, 2023~Nov. 03, 2023	Apr. 07, 2024	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 04, 2023	Oct. 25, 2023~Nov. 03, 2023	Apr. 03, 2024	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 18, 2023	Oct. 25, 2023~Nov. 03, 2023	Oct. 17, 2024	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5Ghz	Oct. 18, 2023	Oct. 25, 2023~Nov. 03, 2023	Oct. 17, 2024	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 07, 2023	Oct. 25, 2023~Nov. 03, 2023	Jul. 06, 2024	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	Oct. 18, 2023	Oct. 25, 2023~Nov. 03, 2023	Oct. 17, 2024	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Oct. 25, 2023~Nov. 03, 2023	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Oct. 25, 2023~Nov. 03, 2023	NCR	Radiation (03CH01-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Jul. 06, 2023	Oct. 30, 2023	Jul. 05, 2024	Conduction (CO01-SZ)
AC LISN	R&S	ENV216	100063	9kHz~30MHz	Aug. 21, 2023	Oct. 30, 2023	Aug. 20, 2024	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 16, 2023	Oct. 30, 2023	Oct. 15, 2024	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 07, 2023	Oct. 30, 2023	Jul. 06, 2024	Conduction (CO01-SZ)
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 06, 2023	Oct. 26, 2023~Oct. 31, 2023	Apr. 05, 2024	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 27, 2022	Oct. 26, 2023~Oct. 31, 2023	Dec. 26, 2023	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1542004	50MHz Bandwidth	Dec. 27, 2022	Oct. 26, 2023~Oct. 31, 2023	Dec. 26, 2023	Conducted (TH01-SZ)
Thermo meter	Anymetre	JR593	#7	- 10℃ ~ 50℃ 10%RH~99%RH	Apr. 08, 2023	Oct. 26, 2023~Oct. 31, 2023	Apr. 07, 2024	Conducted (TH01-SZ)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Conducted Power Spectral Density	±1.32 dB
Frequency	±1.3 Hz

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.2 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.3 dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Zhang Jiang	Temperature:	21~25	°C
Test Date:	2023/10/26~2023/10/31	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
					Ant 5	Ant 5		
11b	1Mbps	1	1	2412	13.14	8.58	0.50	Pass
11b	1Mbps	1	6	2437	13.09	8.10	0.50	Pass
11b	1Mbps	1	11	2462	13.54	9.08	0.50	Pass
11g	6Mbps	1	1	2412	17.43	15.50	0.50	Pass
11g	6Mbps	1	6	2437	17.08	14.76	0.50	Pass
11g	6Mbps	1	11	2462	17.48	16.32	0.50	Pass
HT20	MCS0	1	1	2412	18.03	15.14	0.50	Pass
HT20	MCS0	1	6	2437	17.98	15.16	0.50	Pass
HT20	MCS0	1	11	2462	18.53	16.00	0.50	Pass
HT40	MCS0	1	3	2422	36.66	33.96	0.50	Pass
HT40	MCS0	1	6	2437	36.36	32.68	0.50	Pass
HT40	MCS0	1	9	2452	37.46	35.24	0.50	Pass

TEST RESULTS DATA
Average Output Power

2.4GHz Band						
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
					Ant 5	Ant 5
11b	1Mbps	1	1	2412	0.00	19.10
11b	1Mbps	1	6	2437	0.00	18.70
11b	1Mbps	1	11	2462	0.00	18.80
11g	6Mbps	1	1	2412	0.12	16.50
11g	6Mbps	1	6	2437	0.12	18.30
11g	6Mbps	1	11	2462	0.12	16.40
HT20	MCS0	1	1	2412	0.16	16.60
HT20	MCS0	1	6	2437	0.16	18.40
HT20	MCS0	1	11	2462	0.16	16.50
HT40	MCS0	1	3	2422	0.29	13.70
HT40	MCS0	1	4	2427	0.29	13.70
HT40	MCS0	1	5	2432	0.29	14.80
HT40	MCS0	1	6	2437	0.29	16.00
HT40	MCS0	1	7	2442	0.29	15.00
HT40	MCS0	1	8	2447	0.29	13.00
HT40	MCS0	1	9	2452	0.29	13.00

Setting
Ant 5
18.5
18.5
18.5
17
18.5
16.5
17
18.5
16.5
14
14
15
16.5
15.5
13.5
13.5

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Output Power

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 5	Ant 5	Ant 5	Ant 5	Ant 5	
11b	1Mbps	1	1	2412	20.78	30.00	-4.50	16.28	36.00	Pass
11b	1Mbps	1	6	2437	20.48	30.00	-4.50	15.98	36.00	Pass
11b	1Mbps	1	11	2462	20.49	30.00	-4.50	15.99	36.00	Pass
11g	6Mbps	1	1	2412	25.09	30.00	-4.50	20.59	36.00	Pass
11g	6Mbps	1	6	2437	25.11	30.00	-4.50	20.61	36.00	Pass
11g	6Mbps	1	11	2462	24.77	30.00	-4.50	20.27	36.00	Pass
HT20	MCS0	1	1	2412	25.29	30.00	-4.50	20.79	36.00	Pass
HT20	MCS0	1	6	2437	25.31	30.00	-4.50	20.81	36.00	Pass
HT20	MCS0	1	11	2462	24.86	30.00	-4.50	20.36	36.00	Pass
HT40	MCS0	1	3	2422	24.52	30.00	-4.50	20.02	36.00	Pass
HT40	MCS0	1	4	2427	24.39	30.00	-4.50	19.89	36.00	Pass
HT40	MCS0	1	5	2432	24.75	30.00	-4.50	20.25	36.00	Pass
HT40	MCS0	1	6	2437	25.18	30.00	-4.50	20.68	36.00	Pass
HT40	MCS0	1	7	2442	24.84	30.00	-4.50	20.34	36.00	Pass
HT40	MCS0	1	8	2447	23.95	30.00	-4.50	19.45	36.00	Pass
HT40	MCS0	1	9	2452	23.98	30.00	-4.50	19.48	36.00	Pass

TEST RESULTS DATA
Peak Power Spectral Density


2.4GHz Band								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)	DG (dBi)	Peak PSD Limit (dBm/3kHz)	Pass/Fail
					Ant 5	Ant 5	Ant 5	
11b	1Mbps	1	1	2412	-2.96	-4.50	8.00	Pass
11b	1Mbps	1	6	2437	-2.94	-4.50	8.00	Pass
11b	1Mbps	1	11	2462	-2.53	-4.50	8.00	Pass
11g	6Mbps	1	1	2412	-6.51	-4.50	8.00	Pass
11g	6Mbps	1	6	2437	-5.72	-4.50	8.00	Pass
11g	6Mbps	1	11	2462	-6.23	-4.50	8.00	Pass
HT20	MCS0	1	1	2412	-6.68	-4.50	8.00	Pass
HT20	MCS0	1	6	2437	-3.98	-4.50	8.00	Pass
HT20	MCS0	1	11	2462	-6.20	-4.50	8.00	Pass
HT40	MCS0	1	3	2422	-9.47	-4.50	8.00	Pass
HT40	MCS0	1	6	2437	-10.22	-4.50	8.00	Pass
HT40	MCS0	1	9	2452	-10.41	-4.50	8.00	Pass

Measured power density (dBm) has offset with cable loss.



Appendix B. AC Conducted Emission Test Results


Test Engineer :	Lily Qiu	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

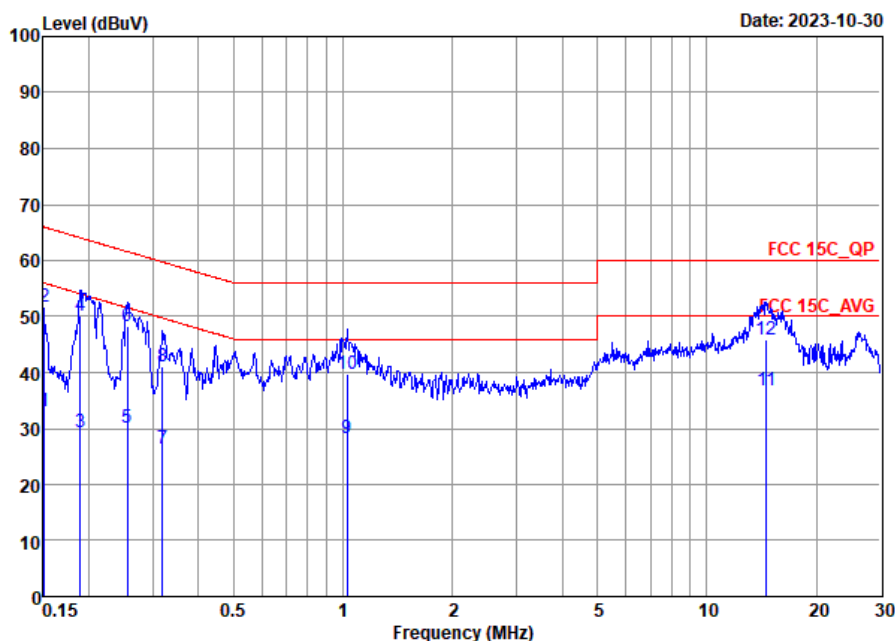

Site : CO01-SZ
Condition: FCC 15C_QP LISN_20230420_L LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15	33.00	-22.96	55.96	12.40	10.47	10.13	Average
2	0.15	51.60	-14.36	65.96	31.00	10.47	10.13	QP
3	0.19	29.38	-24.68	54.06	8.80	10.43	10.15	Average
4	0.19	50.08	-13.98	64.06	29.50	10.43	10.15	QP
5	0.25	30.03	-21.57	51.60	9.50	10.38	10.15	Average
6	0.25	48.33	-13.27	61.60	27.80	10.38	10.15	QP
7	0.32	26.30	-23.45	49.75	5.80	10.34	10.16	Average
8	0.32	41.20	-18.55	59.75	20.70	10.34	10.16	QP
9	1.03	28.30	-17.70	46.00	7.90	10.24	10.16	Average
10	1.03	39.60	-16.40	56.00	19.20	10.24	10.16	QP
11 *	14.59	36.86	-13.14	50.00	16.50	9.88	10.48	Average
12	14.59	45.96	-14.04	60.00	25.60	9.88	10.48	QP

Test Engineer :	Lily Qiu	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

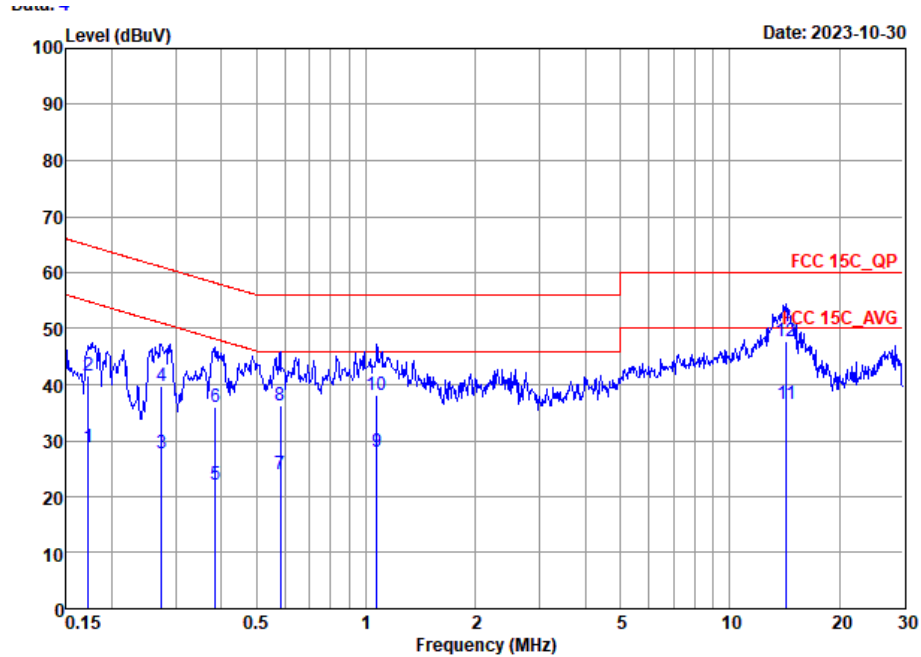

Site : CO01-SZ
Condition: FCC 15C_QP LISN_20230420_N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.17	28.76	-26.10	54.86	8.20	10.42	10.14	Average
2	0.17	41.66	-23.20	64.86	21.10	10.42	10.14	QP
3	0.27	27.67	-23.31	50.98	7.20	10.32	10.15	Average
4	0.27	39.77	-21.21	60.98	19.30	10.32	10.15	QP
5	0.39	22.01	-26.16	48.17	1.60	10.25	10.16	Average
6	0.39	36.01	-22.16	58.17	15.60	10.25	10.16	QP
7	0.58	24.09	-21.91	46.00	3.70	10.23	10.16	Average
8	0.58	36.29	-19.71	56.00	15.90	10.23	10.16	QP
9	1.07	28.02	-17.98	46.00	7.59	10.26	10.17	Average
10	1.07	38.22	-17.78	56.00	17.79	10.26	10.17	QP
11	14.29	36.57	-13.43	50.00	16.20	9.89	10.48	Average
12 *	14.29	47.87	-12.13	60.00	27.50	9.89	10.48	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)

Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Hua Cong Liang	Relative Humidity :	48~49%
		Temperature :	24-25℃





Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	5	802.11b	01	2412	1Mbps	-	-
Mode 2	2400-2483.5	5	802.11b	06	2437	1Mbps	-	-
Mode 3	2400-2483.5	5	802.11b	11	2462	1Mbps	-	-
Mode 4	2400-2483.5	5	802.11g	01	2412	6Mbps	-	-
Mode 5	2400-2483.5	5	802.11g	06	2437	6Mbps	-	-
Mode 6	2400-2483.5	5	802.11g	11	2462	6Mbps	-	-
Mode 7	2400-2483.5	5	802.11n HT20	01	2412	MCS0	-	-
Mode 8	2400-2483.5	5	802.11n HT20	06	2437	MCS0	-	-
Mode 9	2400-2483.5	5	802.11n HT20	11	2462	MCS0	-	-
Mode 10	2400-2483.5	5	802.11n HT40	03	2422	MCS0	-	-
Mode 11	2400-2483.5	5	802.11n HT40	09	2452	MCS0	-	-
Mode 12	2400-2483.5	5	802.11n HT20	01	2412	MCS0	-	LF
Mode 13	Co-location	5	802.11n HT20+Band 13	01	2412	MCS0	-	-
Mode 14	2400-2483.5	5	802.11n HT40	04	2427	MCS0	-	-
Mode 15	2400-2483.5	5	802.11n HT40	05	2432	MCS0	-	-
Mode 16	2400-2483.5	5	802.11n HT40	06	2437	MCS0	-	-
Mode 17	2400-2483.5	5	802.11n HT40	08	2447	MCS0	-	-
Mode 18	2400-2483.5	5	802.11n HT40	07	2442	MCS0	-	-
Mode 19	2400-2483.5	5	802.11n HT20	01	2412	MCS0	-	Sample 2





Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11b	01	2387.22	40.55	54.00	-13.45	H	AVERAGE	Pass	Band Edge
	802.11b	01	4824.00	47.78	54.00	-6.22	H	Average	Pass	Harmonic
2	802.11b	06	-	-	-	-	-	-	-	Band Edge
	802.11b	06	4874.00	43.95	54.00	-10.05	H	Average	Pass	Harmonic
3	802.11b	11	2487.16	41.50	54.00	-12.50	H	AVERAGE	Pass	Band Edge
	802.11b	11	4924.00	46.38	54.00	-7.62	H	Average	Pass	Harmonic
4	802.11g	01	-	-	-	-	-	-	-	Band Edge
	802.11g	01	4824.00	44.96	74.00	-29.04	V	Peak	Pass	Harmonic
5	802.11g	06	-	-	-	-	-	-	-	Band Edge
	802.11g	06	7311.00	47.19	74.00	-26.81	H	Peak	Pass	Harmonic
6	802.11g	11	-	-	-	-	-	-	-	Band Edge
	802.11g	11	7386.00	47.09	74.00	-26.91	H	Peak	Pass	Harmonic
7	802.11n HT20	01	2389.99	50.58	54.00	-3.42	H	AVERAGE	Pass	Band Edge
	802.11n HT20	01	4824.00	46.21	74.00	-27.79	V	Peak	Pass	Harmonic
8	802.11n HT20	06	-	-	-	-	-	-	-	Band Edge
	802.11n HT20	06	7311.00	46.94	74.00	-27.06	H	Peak	Pass	Harmonic
9	802.11n HT20	11	2483.50	49.22	54.00	-4.78	H	AVERAGE	Pass	Band Edge
	802.11n HT20	11	7386.00	46.56	74.00	-27.44	V	Peak	Pass	Harmonic
10	802.11n HT40	03	2389.97	49.94	54.00	-4.06	H	AVERAGE	Pass	Band Edge
	802.11n HT40	03	-	-	-	-	-	-	-	Harmonic
11	802.11n HT40	09	2483.58	50.4	54.00	-3.6	H	AVERAGE	Pass	Band Edge
	802.11n HT40	09	-	-	-	-	-	-	-	Harmonic
12	802.11n HT20	01	41.64	32.41	40	-7.59	V	Peak	Pass	LF
13	802.11n HT20	01	2389.95	48.75	54.00	-5.25	H	AVERAGE	Pass	Band Edge
	802.11n HT20	01	4824.00	46.56	74.00	-27.44	V	Peak	Pass	Harmonic
14	802.11n HT40	04	2389.41	51.19	54.00	-3.81	H	AVERAGE	Pass	Band Edge
	802.11n HT40	04	-	-	-	-	-	-	-	Harmonic
15	802.11n HT40	05	2389.63	48.80	54.00	-4.20	H	AVERAGE	Pass	Band Edge
	802.11n HT40	05	-	-	-	-	-	-	-	Harmonic
16	802.11n HT40	06	2389.76	50.40	54.00	-3.60	H	AVERAGE	Pass	Band Edge
	802.11n HT40	06	-	-	-	-	-	-	-	Harmonic
17	802.11n HT40	08	2484.45	49.86	54.00	-4.14	H	AVERAGE	Pass	Band Edge
	802.11n HT40	08	-	-	-	-	-	-	-	Harmonic
18	802.11n HT40	07	2483.56	50.24	54.00	-3.76	H	AVERAGE	Pass	Band Edge
	802.11n HT40	07	-	-	-	-	-	-	-	Harmonic
19	802.11n HT20	01	2389.95	50.47	54.00	-3.53	H	AVERAGE	Pass	Band Edge
	802.11n HT20	01	4824.00	45.36	74.00	-28.64	H	Peak	Pass	Harmonic

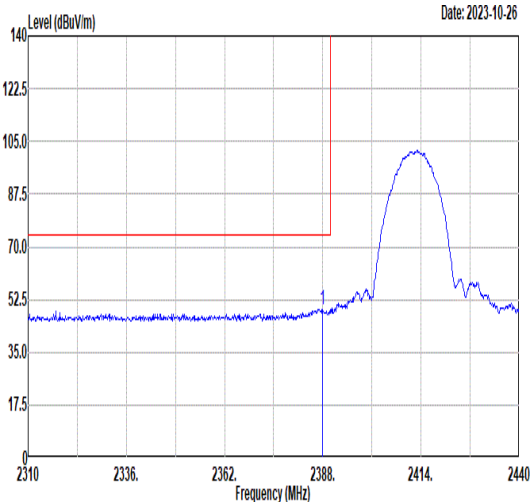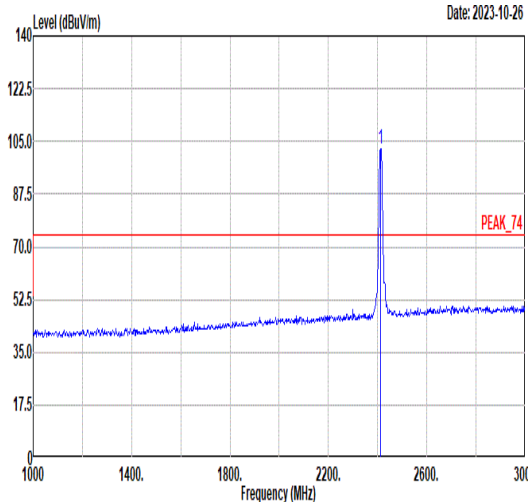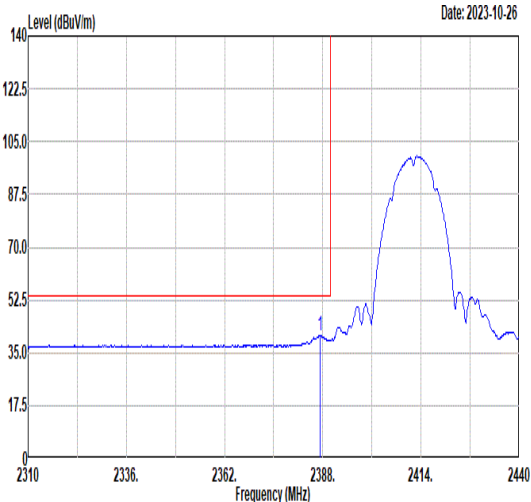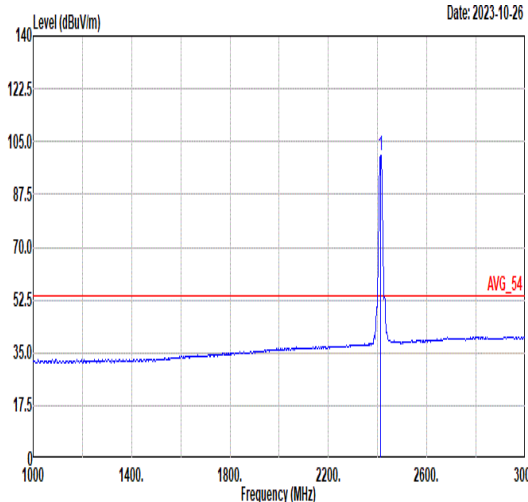

Mode	1																																																																																										
	Band Edge																																																																																										
	2400-2483.5_802.11b_CH01_2412MHz																																																																																										
ANT	5																																																																																										
Pol.	Horizontal					Fundamental																																																																																					
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2387.87</td><td>49.31</td><td>74.00</td><td>-24.69</td><td>41.39</td><td>32.25</td><td>7.75</td><td>32.08</td><td>400</td><td>32 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2387.87	49.31	74.00	-24.69	41.39	32.25	7.75	32.08	400	32 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>102.47</td><td>-----</td><td>-----</td><td>94.43</td><td>32.31</td><td>7.81</td><td>32.08</td><td>400</td><td>32 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2412.00	102.47	-----	-----	94.43	32.31	7.81	32.08	400
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2387.87	49.31	74.00	-24.69	41.39	32.25	7.75	32.08	400	32 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2412.00	102.47	-----	-----	94.43	32.31	7.81	32.08	400	32 PEAK																																																																																	
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2387.22</td><td>40.55</td><td>54.00</td><td>-13.45</td><td>32.63</td><td>32.25</td><td>7.75</td><td>32.08</td><td>400</td><td>32 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2387.22	40.55	54.00	-13.45	32.63	32.25	7.75	32.08	400	32 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>100.45</td><td>-----</td><td>-----</td><td>92.41</td><td>32.31</td><td>7.81</td><td>32.08</td><td>400</td><td>32 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2412.00	100.45	-----	-----	92.41	32.31	7.81	32.08	400
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2387.22	40.55	54.00	-13.45	32.63	32.25	7.75	32.08	400	32 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2412.00	100.45	-----	-----	92.41	32.31	7.81	32.08	400	32 AVERAGE																																																																																	

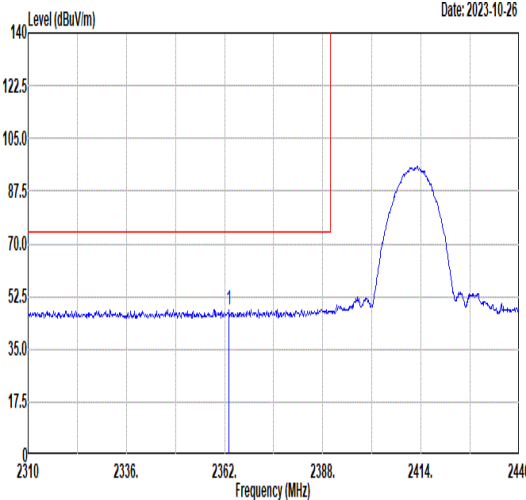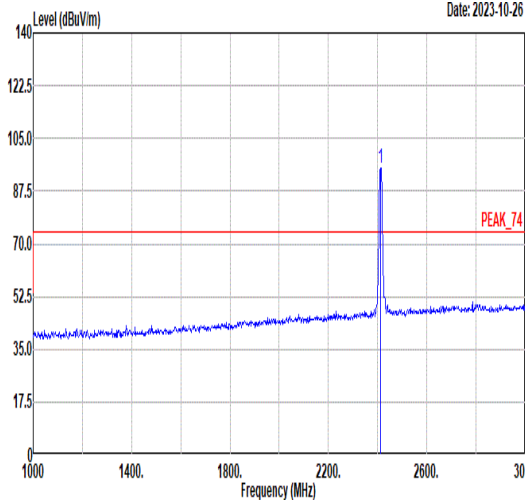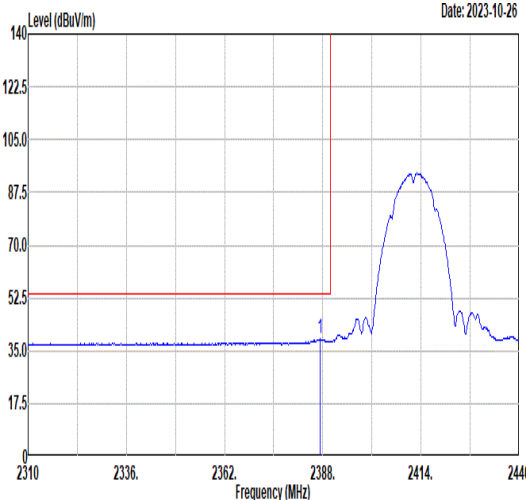
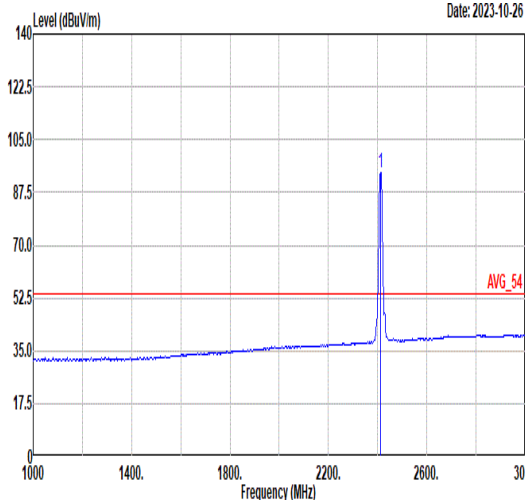


Mode	1																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11b_CH01_2412MHz																																																																																	
ANT	5																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2023-10-26  231023362362238824142440 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2363.17</td><td>48.30</td><td>74.00</td><td>-25.70</td><td>40.49</td><td>32.20</td><td>7.68</td><td>32.07</td><td>360 83 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2363.17	48.30	74.00	-25.70	40.49	32.20	7.68	32.07	360 83 PEAK	Level (dBuV/m) Date: 2023-10-26  100014001800220026003000 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>94.96</td><td>-----</td><td>-----</td><td>86.92</td><td>32.31</td><td>7.81</td><td>32.08</td><td>360 83 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	94.96	-----	-----	86.92	32.31	7.81	32.08	360 83 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2363.17	48.30	74.00	-25.70	40.49	32.20	7.68	32.07	360 83 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2412.00	94.96	-----	-----	86.92	32.31	7.81	32.08	360 83 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2023-10-26  231023362362238824142440 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2387.35</td><td>39.03</td><td>54.00</td><td>-14.97</td><td>31.11</td><td>32.25</td><td>7.75</td><td>32.08</td><td>360 83 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2387.35	39.03	54.00	-14.97	31.11	32.25	7.75	32.08	360 83 AVERAGE	Level (dBuV/m) Date: 2023-10-26  100014001800220026003000 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>93.86</td><td>-----</td><td>-----</td><td>85.82</td><td>32.31</td><td>7.81</td><td>32.08</td><td>360 83 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	93.86	-----	-----	85.82	32.31	7.81	32.08	360 83 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2387.35	39.03	54.00	-14.97	31.11	32.25	7.75	32.08	360 83 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2412.00	93.86	-----	-----	85.82	32.31	7.81	32.08	360 83 AVERAGE																																																																									



Mode	1																																																															
	Harmonic																																																															
	2400-2483.5_802.11b_CH01_2412MHz																																																															
ANT	5																																																															
Pol.	Horizontal																																																															
Peak Avg	Level (dBuV/m) Date: 2023-10-26 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>50.23</td><td>74.00</td><td>-23.77</td><td>56.87</td><td>33.85</td><td>11.08</td><td>51.57</td><td>150</td><td>82</td><td>Peak</td></tr><tr><td>2</td><td>4824.00</td><td>47.78</td><td>54.00</td><td>-6.22</td><td>54.42</td><td>33.85</td><td>11.08</td><td>51.57</td><td>150</td><td>82</td><td>Average</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	50.23	74.00	-23.77	56.87	33.85	11.08	51.57	150	82	Peak	2	4824.00	47.78	54.00	-6.22	54.42	33.85	11.08	51.57	150	82	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																							
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																					
1	4824.00	50.23	74.00	-23.77	56.87	33.85	11.08	51.57	150	82	Peak																																																					
2	4824.00	47.78	54.00	-6.22	54.42	33.85	11.08	51.57	150	82	Average																																																					
Vertical	Level (dBuV/m) Date: 2023-10-26 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>48.33</td><td>74.00</td><td>-25.67</td><td>54.97</td><td>33.85</td><td>11.08</td><td>51.57</td><td>154</td><td>360</td><td>Peak</td></tr><tr><td>2</td><td>4824.00</td><td>44.79</td><td>54.00</td><td>-9.21</td><td>51.43</td><td>33.85</td><td>11.08</td><td>51.57</td><td>154</td><td>360</td><td>Average</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	48.33	74.00	-25.67	54.97	33.85	11.08	51.57	154	360	Peak	2	4824.00	44.79	54.00	-9.21	51.43	33.85	11.08	51.57	154	360	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																							
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																					
1	4824.00	48.33	74.00	-25.67	54.97	33.85	11.08	51.57	154	360	Peak																																																					
2	4824.00	44.79	54.00	-9.21	51.43	33.85	11.08	51.57	154	360	Average																																																					



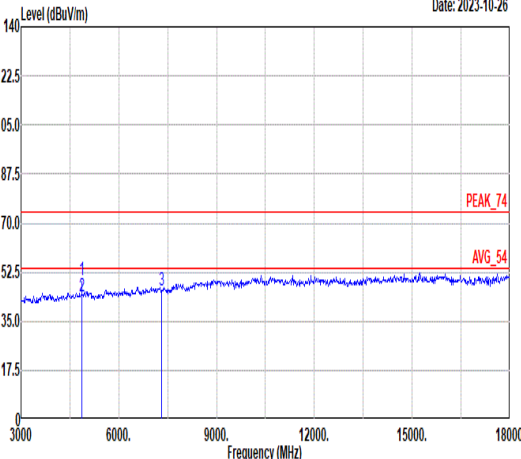
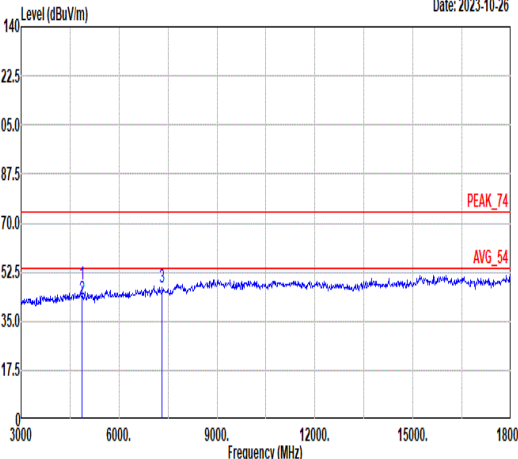


Mode	2																																																																																																																																												
	Harmonic																																																																																																																																												
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																																																												
ANT	5																																																																																																																																												
Pol.	Horizontal						Vertical																																																																																																																																						
Peak Avg																																																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>49.55</td><td>74.00</td><td>-24.45</td><td>56.26</td><td>33.74</td><td>11.10</td><td>51.55</td><td>160</td><td>87</td><td>Peak</td></tr><tr><td>2</td><td>4874.00</td><td>43.95</td><td>54.00</td><td>-10.05</td><td>50.66</td><td>33.74</td><td>11.10</td><td>51.55</td><td>160</td><td>87</td><td>Average</td></tr><tr><td>3</td><td>7311.00</td><td>45.85</td><td>74.00</td><td>-28.15</td><td>48.17</td><td>35.76</td><td>13.08</td><td>51.16</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	49.55	74.00	-24.45	56.26	33.74	11.10	51.55	160	87	Peak	2	4874.00	43.95	54.00	-10.05	50.66	33.74	11.10	51.55	160	87	Average	3	7311.00	45.85	74.00	-28.15	48.17	35.76	13.08	51.16	--	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>47.85</td><td>74.00</td><td>-26.15</td><td>54.56</td><td>33.74</td><td>11.10</td><td>51.55</td><td>150</td><td>360</td><td>Peak</td></tr><tr><td>2</td><td>4874.00</td><td>42.96</td><td>54.00</td><td>-11.04</td><td>49.67</td><td>33.74</td><td>11.10</td><td>51.55</td><td>150</td><td>360</td><td>Average</td></tr><tr><td>3</td><td>7311.00</td><td>47.23</td><td>74.00</td><td>-26.77</td><td>49.55</td><td>35.76</td><td>13.08</td><td>51.16</td><td>--</td><td>--</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	47.85	74.00	-26.15	54.56	33.74	11.10	51.55	150	360	Peak	2	4874.00	42.96	54.00	-11.04	49.67	33.74	11.10	51.55	150	360	Average	3	7311.00	47.23	74.00	-26.77	49.55	35.76	13.08	51.16	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																					
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																			
1	4874.00	49.55	74.00	-24.45	56.26	33.74	11.10	51.55	160	87	Peak																																																																																																																																		
2	4874.00	43.95	54.00	-10.05	50.66	33.74	11.10	51.55	160	87	Average																																																																																																																																		
3	7311.00	45.85	74.00	-28.15	48.17	35.76	13.08	51.16	--	--	Peak																																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																			
1	4874.00	47.85	74.00	-26.15	54.56	33.74	11.10	51.55	150	360	Peak																																																																																																																																		
2	4874.00	42.96	54.00	-11.04	49.67	33.74	11.10	51.55	150	360	Average																																																																																																																																		
3	7311.00	47.23	74.00	-26.77	49.55	35.76	13.08	51.16	--	--	Peak																																																																																																																																		



Mode	3																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11b_CH11_2462MHz																																																																																	
ANT	5																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2023-10-26 PEAK_BE_74 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2487.38</td><td>51.12</td><td>74.00</td><td>-22.88</td><td>42.87</td><td>32.47</td><td>7.88</td><td>32.10</td><td>100</td><td>35 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2487.38	51.12	74.00	-22.88	42.87	32.47	7.88	32.10	100	35 PEAK	Level (dBuV/m) Date: 2023-10-26 PEAK_74 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2462.00</td><td>101.37</td><td>-----</td><td>-----</td><td>93.18</td><td>32.42</td><td>7.86</td><td>32.09</td><td>100</td><td>35 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2462.00	101.37	-----	-----	93.18	32.42	7.86	32.09	100	35 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2487.38	51.12	74.00	-22.88	42.87	32.47	7.88	32.10	100	35 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2462.00	101.37	-----	-----	93.18	32.42	7.86	32.09	100	35 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2023-10-26 AVG_BE_54 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2487.16</td><td>41.50</td><td>54.00</td><td>-12.50</td><td>33.25</td><td>32.47</td><td>7.88</td><td>32.10</td><td>100</td><td>35 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2487.16	41.50	54.00	-12.50	33.25	32.47	7.88	32.10	100	35 AVERAGE	Level (dBuV/m) Date: 2023-10-26 AVG_54 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2462.00</td><td>99.57</td><td>-----</td><td>-----</td><td>91.38</td><td>32.42</td><td>7.86</td><td>32.09</td><td>100</td><td>35 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2462.00	99.57	-----	-----	91.38	32.42	7.86	32.09	100	35 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2487.16	41.50	54.00	-12.50	33.25	32.47	7.88	32.10	100	35 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2462.00	99.57	-----	-----	91.38	32.42	7.86	32.09	100	35 AVERAGE																																																																									

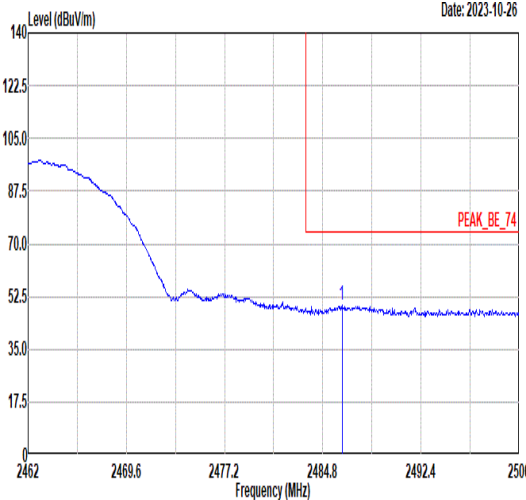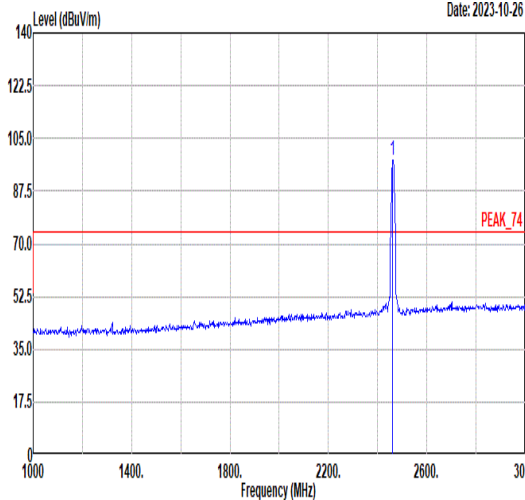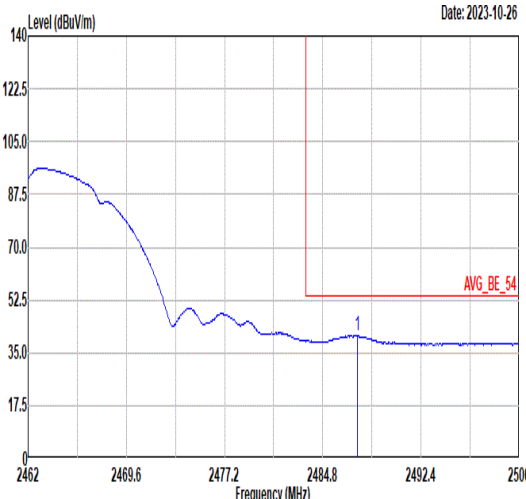
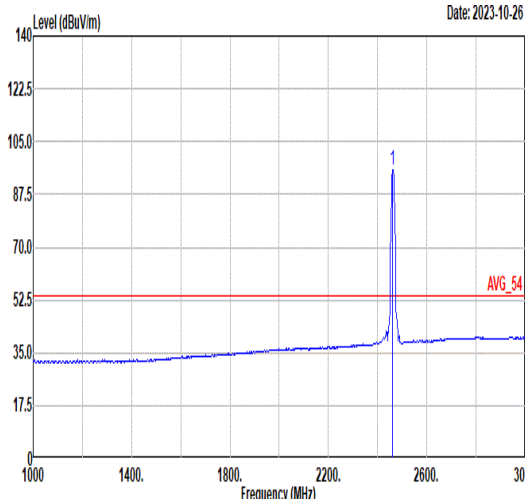




Mode	3																																																																																								
	Band Edge																																																																																								
	2400-2483.5_802.11b_CH11_2462MHz																																																																																								
ANT	5																																																																																								
Pol.	Vertical					Fundamental																																																																																			
Peak																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.28</td><td>49.61</td><td>74.00</td><td>-24.39</td><td>41.36</td><td>32.47</td><td>7.88</td><td>32.10</td><td>223 101 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2486.28	49.61	74.00	-24.39	41.36	32.47	7.88	32.10	223 101 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>97.59</td><td>-----</td><td>-----</td><td>89.40</td><td>32.42</td><td>7.86</td><td>32.09</td><td>223 101 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	97.59	-----	-----	89.40	32.42	7.86	32.09
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2486.28	49.61	74.00	-24.39	41.36	32.47	7.88	32.10	223 101 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2462.00	97.59	-----	-----	89.40	32.42	7.86	32.09	223 101 PEAK																																																																																
Avg																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2487.50</td><td>40.59</td><td>54.00</td><td>-13.41</td><td>32.34</td><td>32.47</td><td>7.88</td><td>32.10</td><td>223 101 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2487.50	40.59	54.00	-13.41	32.34	32.47	7.88	32.10	223 101 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>95.88</td><td>-----</td><td>-----</td><td>87.69</td><td>32.42</td><td>7.86</td><td>32.09</td><td>223 101 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	95.88	-----	-----	87.69	32.42	7.86	32.09
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2487.50	40.59	54.00	-13.41	32.34	32.47	7.88	32.10	223 101 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2462.00	95.88	-----	-----	87.69	32.42	7.86	32.09	223 101 AVERAGE																																																																																



Mode	3																																																																																																																																																								
	Harmonic																																																																																																																																																								
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																																																								
ANT	5																																																																																																																																																								
Pol.	Horizontal						Vertical																																																																																																																																																		
Peak Avg	Level (dBuV/m) Date: 2023-10-26 PEAK_74 AVG_54 <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4924.00</td><td>48.89</td><td>74.00</td><td>-25.11</td><td>55.60</td><td>33.70</td><td>11.12</td><td>51.53</td><td>150</td><td>12</td><td>Peak</td></tr><tr><td>2</td><td>4924.00</td><td>46.38</td><td>54.00</td><td>-7.62</td><td>53.09</td><td>33.70</td><td>11.12</td><td>51.53</td><td>150</td><td>12</td><td>Average</td></tr><tr><td>3</td><td>7386.00</td><td>47.12</td><td>74.00</td><td>-26.88</td><td>49.39</td><td>35.78</td><td>13.13</td><td>51.18</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	4924.00	48.89	74.00	-25.11	55.60	33.70	11.12	51.53	150	12	Peak	2	4924.00	46.38	54.00	-7.62	53.09	33.70	11.12	51.53	150	12	Average	3	7386.00	47.12	74.00	-26.88	49.39	35.78	13.13	51.18	--	--	Peak	Level (dBuV/m) Date: 2023-10-26 PEAK_74 AVG_54 <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4924.00</td><td>46.59</td><td>74.00</td><td>-27.41</td><td>53.30</td><td>33.70</td><td>11.12</td><td>51.53</td><td>150</td><td>360</td><td>Peak</td></tr><tr><td>2</td><td>4924.00</td><td>44.03</td><td>54.00</td><td>-9.97</td><td>50.74</td><td>33.70</td><td>11.12</td><td>51.53</td><td>150</td><td>360</td><td>Average</td></tr><tr><td>3</td><td>7386.00</td><td>47.81</td><td>74.00</td><td>-26.19</td><td>50.08</td><td>35.78</td><td>13.13</td><td>51.18</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	4924.00	46.59	74.00	-27.41	53.30	33.70	11.12	51.53	150	360	Peak	2	4924.00	44.03	54.00	-9.97	50.74	33.70	11.12	51.53	150	360	Average	3	7386.00	47.81	74.00	-26.19	50.08	35.78	13.13	51.18	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																													
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																															
1	4924.00	48.89	74.00	-25.11	55.60	33.70	11.12	51.53	150	12	Peak																																																																																																																																														
2	4924.00	46.38	54.00	-7.62	53.09	33.70	11.12	51.53	150	12	Average																																																																																																																																														
3	7386.00	47.12	74.00	-26.88	49.39	35.78	13.13	51.18	--	--	Peak																																																																																																																																														
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																
1	4924.00	46.59	74.00	-27.41	53.30	33.70	11.12	51.53	150	360	Peak																																																																																																																																														
2	4924.00	44.03	54.00	-9.97	50.74	33.70	11.12	51.53	150	360	Average																																																																																																																																														
3	7386.00	47.81	74.00	-26.19	50.08	35.78	13.13	51.18	--	--	Peak																																																																																																																																														

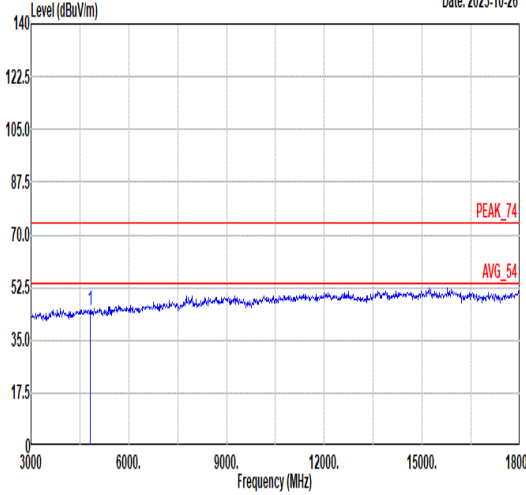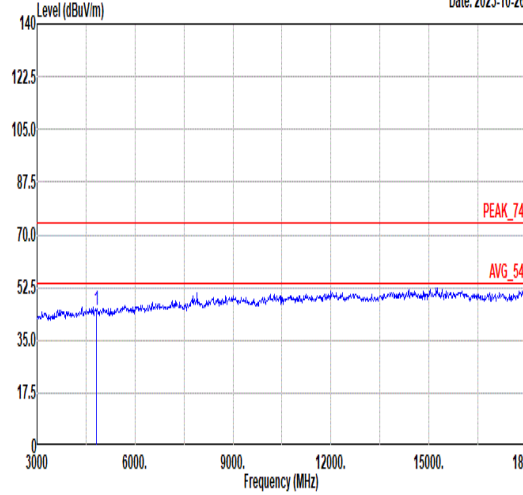





Mode	4																																																																																											
	Harmonic																																																																																											
	2400-2483.5_802.11g_CH01_2412MHz																																																																																											
ANT	5																																																																																											
Pol.	Horizontal						Vertical																																																																																					
Peak Avg	Level (dBuV/m) Date: 2023-10-26  PEAK_74 AVG_54 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>44.76</td><td>74.00</td><td>-29.24</td><td>51.40</td><td>33.85</td><td>11.08</td><td>51.57</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4824.00	44.76	74.00	-29.24	51.40	33.85	11.08	51.57	--	--	Peak	Level (dBuV/m) Date: 2023-10-26  PEAK_74 AVG_54 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>44.96</td><td>74.00</td><td>-29.04</td><td>51.60</td><td>33.85</td><td>11.08</td><td>51.57</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4824.00	44.96	74.00	-29.04	51.60	33.85	11.08	51.57	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	4824.00	44.76	74.00	-29.24	51.40	33.85	11.08	51.57	--	--	Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	4824.00	44.96	74.00	-29.04	51.60	33.85	11.08	51.57	--	--	Peak																																																																																	

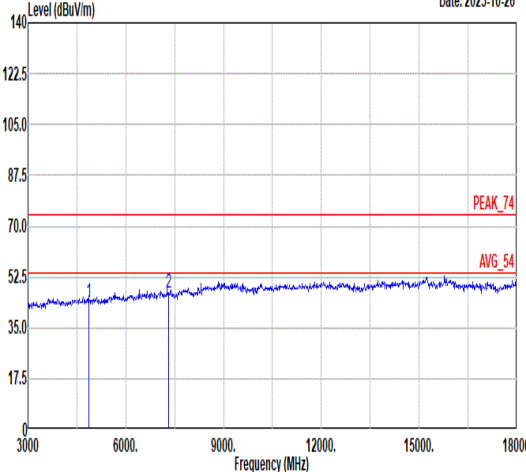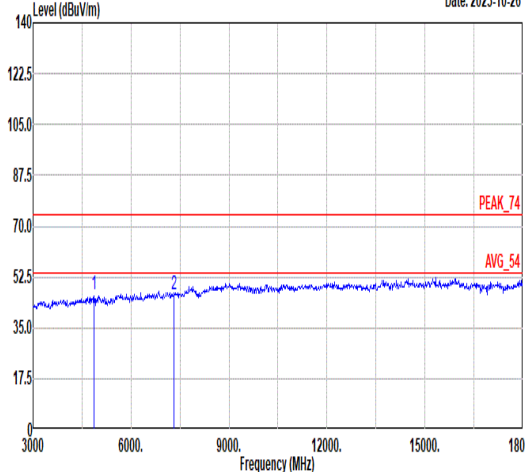Mode	5																																																																																									
	Harmonic																																																																																									
	2400-2483.5_802.11g_CH06_2437MHz																																																																																									
ANT	5																																																																																									
Pol.	Horizontal					Vertical																																																																																				
Peak Avg	Level (dBuV/m) Date: 2023-10-26 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>4874.00</td><td>44.06</td><td>74.00</td><td>-29.94</td><td>50.77</td><td>33.74</td><td>11.10</td></tr><tr><td>2</td><td>7311.00</td><td>47.19</td><td>74.00</td><td>-26.81</td><td>49.51</td><td>35.76</td><td>13.08</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4874.00	44.06	74.00	-29.94	50.77	33.74	11.10	2	7311.00	47.19	74.00	-26.81	49.51	35.76	13.08	Level (dBuV/m) Date: 2023-10-26 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>4874.00</td><td>46.48</td><td>74.00</td><td>-27.52</td><td>53.19</td><td>33.74</td><td>11.10</td></tr><tr><td>2</td><td>7311.00</td><td>46.48</td><td>74.00</td><td>-27.52</td><td>48.80</td><td>35.76</td><td>13.08</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4874.00	46.48	74.00	-27.52	53.19	33.74	11.10	2	7311.00	46.48	74.00	-27.52	48.80	35.76	13.08
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																			
1	4874.00	44.06	74.00	-29.94	50.77	33.74	11.10																																																																																			
2	7311.00	47.19	74.00	-26.81	49.51	35.76	13.08																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																			
1	4874.00	46.48	74.00	-27.52	53.19	33.74	11.10																																																																																			
2	7311.00	46.48	74.00	-27.52	48.80	35.76	13.08																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>4874.00</td><td>44.06</td><td>74.00</td><td>-29.94</td><td>50.77</td><td>33.74</td><td>11.10</td></tr><tr><td>2</td><td>7311.00</td><td>47.19</td><td>74.00</td><td>-26.81</td><td>49.51</td><td>35.76</td><td>13.08</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4874.00	44.06	74.00	-29.94	50.77	33.74	11.10	2	7311.00	47.19	74.00	-26.81	49.51	35.76	13.08	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>4874.00</td><td>46.48</td><td>74.00</td><td>-27.52</td><td>53.19</td><td>33.74</td><td>11.10</td></tr><tr><td>2</td><td>7311.00</td><td>46.48</td><td>74.00</td><td>-27.52</td><td>48.80</td><td>35.76</td><td>13.08</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4874.00	46.48	74.00	-27.52	53.19	33.74	11.10	2	7311.00	46.48	74.00	-27.52	48.80	35.76	13.08
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																			
1	4874.00	44.06	74.00	-29.94	50.77	33.74	11.10																																																																																			
2	7311.00	47.19	74.00	-26.81	49.51	35.76	13.08																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																			
1	4874.00	46.48	74.00	-27.52	53.19	33.74	11.10																																																																																			
2	7311.00	46.48	74.00	-27.52	48.80	35.76	13.08																																																																																			







Mode	6																																																																																															
	Harmonic																																																																																															
	2400-2483.5_802.11g_CH11_2462MHz																																																																																															
ANT	5																																																																																															
Pol.	Horizontal								Vertical																																																																																							
Peak Avg	Level (dBuV/m) Date: 2023-10-26 Frequency (MHz)								Level (dBuV/m) Date: 2023-10-26 Frequency (MHz)																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>4924.00</td><td>46.58</td><td>74.00</td><td>-27.42</td><td>53.29</td><td>33.70</td><td>11.12</td></tr><tr><td>2</td><td>7386.00</td><td>47.09</td><td>74.00</td><td>-26.91</td><td>49.36</td><td>35.78</td><td>13.13</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4924.00	46.58	74.00	-27.42	53.29	33.70	11.12	2	7386.00	47.09	74.00	-26.91	49.36	35.78	13.13	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>4924.00</td><td>44.21</td><td>74.00</td><td>-29.79</td><td>50.92</td><td>33.70</td><td>11.12</td></tr><tr><td>2</td><td>7386.00</td><td>46.99</td><td>74.00</td><td>-27.01</td><td>49.26</td><td>35.78</td><td>13.13</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4924.00	44.21	74.00	-29.79	50.92	33.70	11.12	2	7386.00	46.99	74.00	-27.01	49.26	35.78	13.13
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	4924.00	46.58	74.00	-27.42	53.29	33.70	11.12																																																																																									
2	7386.00	47.09	74.00	-26.91	49.36	35.78	13.13																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	4924.00	44.21	74.00	-29.79	50.92	33.70	11.12																																																																																									
2	7386.00	46.99	74.00	-27.01	49.26	35.78	13.13																																																																																									
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>4924.00</td><td>46.58</td><td>74.00</td><td>-27.42</td><td>53.29</td><td>33.70</td><td>11.12</td></tr><tr><td>2</td><td>7386.00</td><td>47.09</td><td>74.00</td><td>-26.91</td><td>49.36</td><td>35.78</td><td>13.13</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	4924.00	46.58	74.00	-27.42	53.29	33.70	11.12	2	7386.00	47.09	74.00	-26.91	49.36	35.78	13.13	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>4924.00</td><td>44.21</td><td>74.00</td><td>-29.79</td><td>50.92</td><td>33.70</td><td>11.12</td></tr><tr><td>2</td><td>7386.00</td><td>46.99</td><td>74.00</td><td>-27.01</td><td>49.26</td><td>35.78</td><td>13.13</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	4924.00	44.21	74.00	-29.79	50.92	33.70	11.12	2	7386.00	46.99	74.00	-27.01	49.26	35.78	13.13	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																									
1	4924.00	46.58	74.00	-27.42	53.29	33.70	11.12																																																																																									
2	7386.00	47.09	74.00	-26.91	49.36	35.78	13.13																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																									
1	4924.00	44.21	74.00	-29.79	50.92	33.70	11.12																																																																																									
2	7386.00	46.99	74.00	-27.01	49.26	35.78	13.13																																																																																									
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>46.58</td><td>74.00</td><td>-27.42</td><td>53.29</td><td>33.70</td><td>-- Peak</td></tr><tr><td>2</td><td>7386.00</td><td>47.09</td><td>74.00</td><td>-26.91</td><td>49.36</td><td>35.78</td><td>-- Peak</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	deg	1	4924.00	46.58	74.00	-27.42	53.29	33.70	-- Peak	2	7386.00	47.09	74.00	-26.91	49.36	35.78	-- Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>44.21</td><td>74.00</td><td>-29.79</td><td>50.92</td><td>33.70</td><td>-- Peak</td></tr><tr><td>2</td><td>7386.00</td><td>46.99</td><td>74.00</td><td>-27.01</td><td>49.26</td><td>35.78</td><td>-- Peak</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	deg	1	4924.00	44.21	74.00	-29.79	50.92	33.70	-- Peak	2	7386.00	46.99	74.00	-27.01	49.26	35.78	-- Peak	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	deg																																																																																									
1	4924.00	46.58	74.00	-27.42	53.29	33.70	-- Peak																																																																																									
2	7386.00	47.09	74.00	-26.91	49.36	35.78	-- Peak																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	deg																																																																																									
1	4924.00	44.21	74.00	-29.79	50.92	33.70	-- Peak																																																																																									
2	7386.00	46.99	74.00	-27.01	49.26	35.78	-- Peak																																																																																									

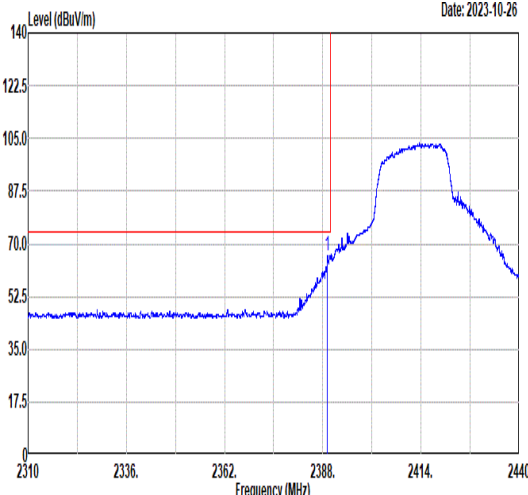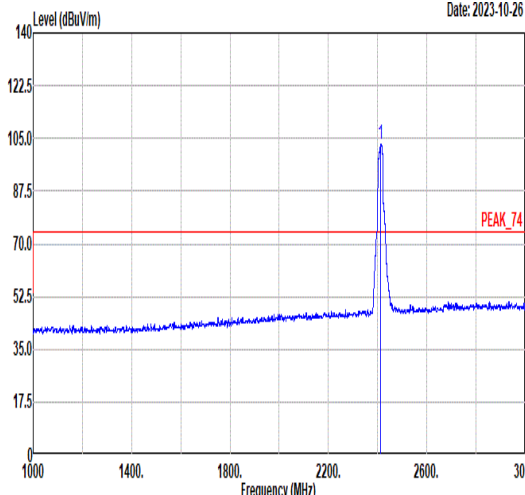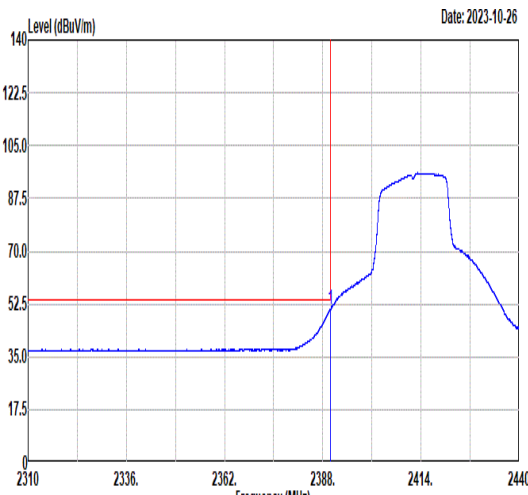
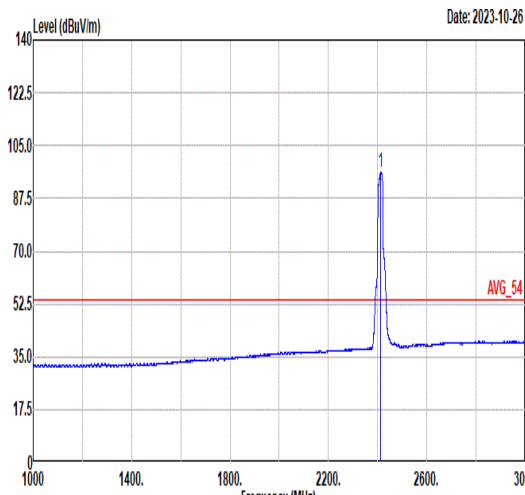


Mode	7																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																	
ANT	5																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Date: 2023-10-26  Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The plot shows a signal rising from 52.5 dBuV/m at 2388 MHz to a peak of approximately 105 dBuV/m at 2412 MHz. A red limit line is at 74.00 dB. The date is 2023-10-26. <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.24</td><td>66.03</td><td>74.00</td><td>-7.97</td><td>58.09</td><td>32.26</td><td>7.76</td><td>32.08</td><td>400 32 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.24	66.03	74.00	-7.97	58.09	32.26	7.76	32.08	400 32 PEAK	Date: 2023-10-26  Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a sharp peak at 2412.00 MHz reaching 103.06 dBuV/m. A red limit line is at 74.00 dB, labeled PEAK_74. The date is 2023-10-26. <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>103.06</td><td>-----</td><td>95.02</td><td>32.31</td><td>7.81</td><td>32.08</td><td>400</td><td>32 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	103.06	-----	95.02	32.31	7.81	32.08	400	32 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2389.24	66.03	74.00	-7.97	58.09	32.26	7.76	32.08	400 32 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2412.00	103.06	-----	95.02	32.31	7.81	32.08	400	32 PEAK																																																																									
Avg	Date: 2023-10-26  Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The plot shows the average signal profile, peaking at 2412 MHz. A red limit line is at 54.00 dB. The date is 2023-10-26. <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.99</td><td>50.58</td><td>54.00</td><td>-3.42</td><td>42.64</td><td>32.26</td><td>7.76</td><td>32.08</td><td>400 32 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.99	50.58	54.00	-3.42	42.64	32.26	7.76	32.08	400 32 AVERAGE	Date: 2023-10-26  Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows the average signal profile, peaking at 2412 MHz. A red limit line is at 54.00 dB, labeled AVG_54. The date is 2023-10-26. <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>95.93</td><td>-----</td><td>87.89</td><td>32.31</td><td>7.81</td><td>32.08</td><td>400</td><td>32 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	95.93	-----	87.89	32.31	7.81	32.08	400	32 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2389.99	50.58	54.00	-3.42	42.64	32.26	7.76	32.08	400 32 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2412.00	95.93	-----	87.89	32.31	7.81	32.08	400	32 AVERAGE																																																																									

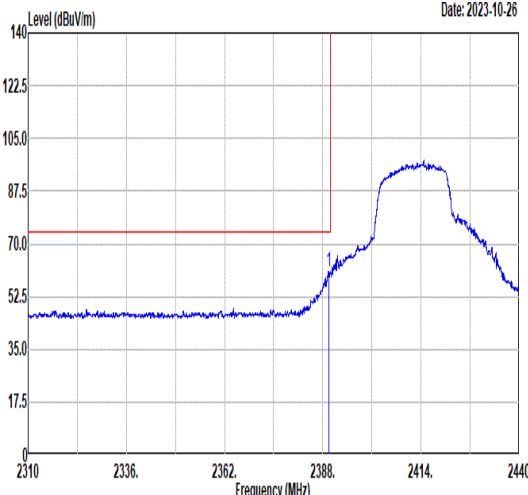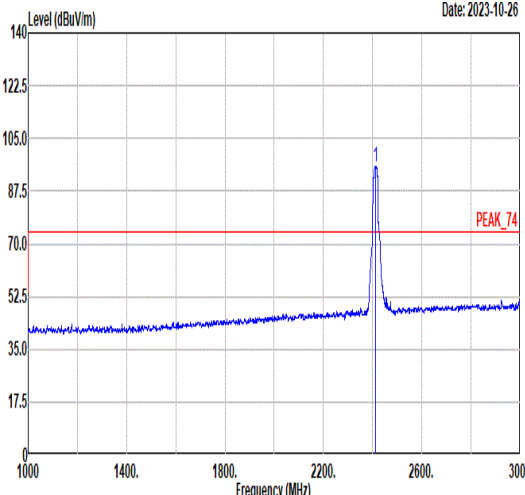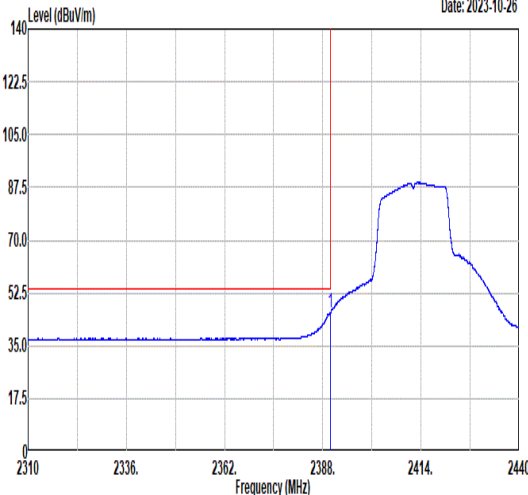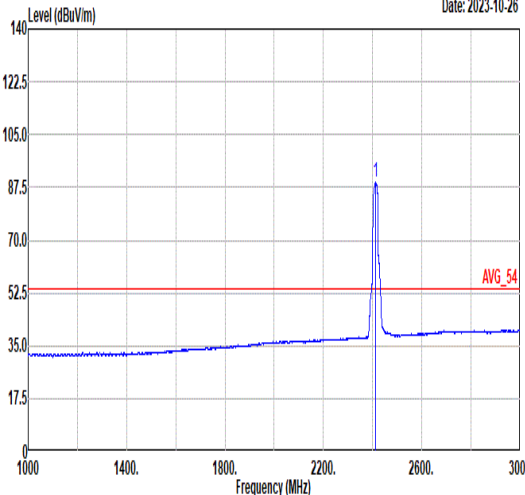

Mode	7																																																																																					
	Band Edge																																																																																					
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																					
ANT	5																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak	Date: 2023-10-26  Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.63</td><td>60.93</td><td>74.00</td><td>-13.07</td><td>52.99</td><td>32.26</td><td>7.76</td><td>32.08</td><td>360</td><td>83</td><td>PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.63	60.93	74.00	-13.07	52.99	32.26	7.76	32.08	360	83	PEAK	Date: 2023-10-26  Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>95.86</td><td>-----</td><td>-----</td><td>87.83</td><td>32.30</td><td>7.81</td><td>32.08</td><td>360</td><td>83</td><td>PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	95.86	-----	-----	87.83	32.30	7.81	32.08	360	83	PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																													
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	2389.63	60.93	74.00	-13.07	52.99	32.26	7.76	32.08	360	83	PEAK																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																													
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	2412.00	95.86	-----	-----	87.83	32.30	7.81	32.08	360	83	PEAK																																																																											
Avg	Date: 2023-10-26  Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.99</td><td>46.06</td><td>54.00</td><td>-7.94</td><td>38.12</td><td>32.26</td><td>7.76</td><td>32.08</td><td>360</td><td>83</td><td>AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.99	46.06	54.00	-7.94	38.12	32.26	7.76	32.08	360	83	AVERAGE	Date: 2023-10-26  Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>89.02</td><td>-----</td><td>-----</td><td>80.98</td><td>32.31</td><td>7.81</td><td>32.08</td><td>360</td><td>83</td><td>AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	89.02	-----	-----	80.98	32.31	7.81	32.08	360	83	AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																													
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	2389.99	46.06	54.00	-7.94	38.12	32.26	7.76	32.08	360	83	AVERAGE																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																													
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	2412.00	89.02	-----	-----	80.98	32.31	7.81	32.08	360	83	AVERAGE																																																																											


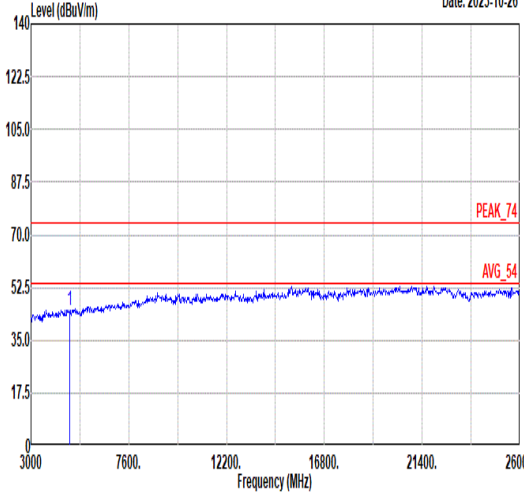
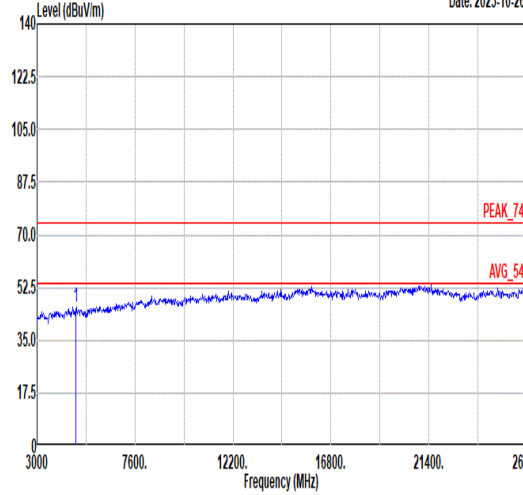


Mode	7																																																																																											
	Harmonic																																																																																											
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																											
ANT	5																																																																																											
Pol.	Horizontal						Vertical																																																																																					
Peak Avg	Level (dBuV/m) Date: 2023-10-26  PEAK_74 AVG_54 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>44.67</td><td>74.00</td><td>-29.33</td><td>51.31</td><td>33.85</td><td>11.08</td><td>51.57</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4824.00	44.67	74.00	-29.33	51.31	33.85	11.08	51.57	--	--	Peak	Level (dBuV/m) Date: 2023-10-26  PEAK_74 AVG_54 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>46.21</td><td>74.00</td><td>-27.79</td><td>52.85</td><td>33.85</td><td>11.08</td><td>51.57</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4824.00	46.21	74.00	-27.79	52.85	33.85	11.08	51.57	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	4824.00	44.67	74.00	-29.33	51.31	33.85	11.08	51.57	--	--	Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	4824.00	46.21	74.00	-27.79	52.85	33.85	11.08	51.57	--	--	Peak																																																																																	



Mode	8																																																																																															
	Harmonic																																																																																															
	2400-2483.5_802.11n HT20_CH06_2437MHz																																																																																															
ANT	5																																																																																															
Pol.	Horizontal										Vertical																																																																																					
Peak Avg	Level (dBuV/m) Date: 2023-10-26 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 3000 6000 9000 12000 15000 18000 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>4874.00</td><td>44.21</td><td>74.00</td><td>-29.79</td><td>50.92</td><td>33.74</td><td>11.10</td></tr><tr><td>2</td><td>7311.00</td><td>46.94</td><td>74.00</td><td>-27.06</td><td>49.26</td><td>35.76</td><td>13.08</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4874.00	44.21	74.00	-29.79	50.92	33.74	11.10	2	7311.00	46.94	74.00	-27.06	49.26	35.76	13.08	Level (dBuV/m) Date: 2023-10-26 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 3000 6000 9000 12000 15000 18000 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>4874.00</td><td>43.76</td><td>74.00</td><td>-30.24</td><td>50.47</td><td>33.74</td><td>11.10</td></tr><tr><td>2</td><td>7311.00</td><td>46.70</td><td>74.00</td><td>-27.30</td><td>49.02</td><td>35.76</td><td>13.08</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4874.00	43.76	74.00	-30.24	50.47	33.74	11.10	2	7311.00	46.70	74.00	-27.30	49.02	35.76	13.08
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	4874.00	44.21	74.00	-29.79	50.92	33.74	11.10																																																																																									
2	7311.00	46.94	74.00	-27.06	49.26	35.76	13.08																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	4874.00	43.76	74.00	-30.24	50.47	33.74	11.10																																																																																									
2	7311.00	46.70	74.00	-27.30	49.02	35.76	13.08																																																																																									

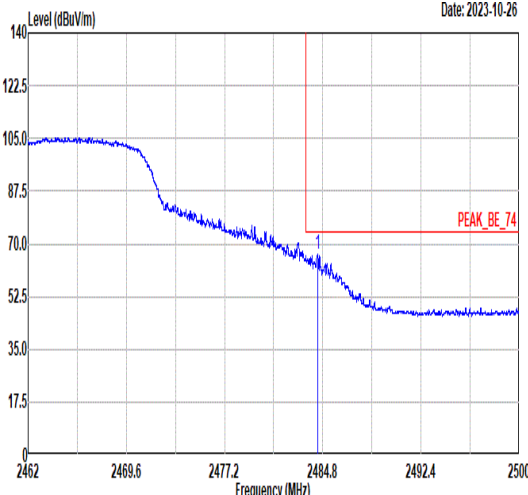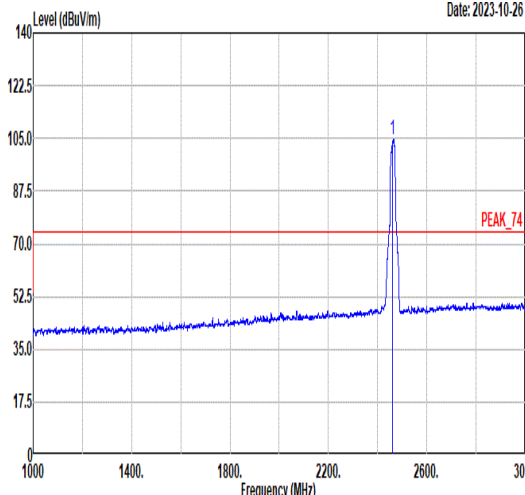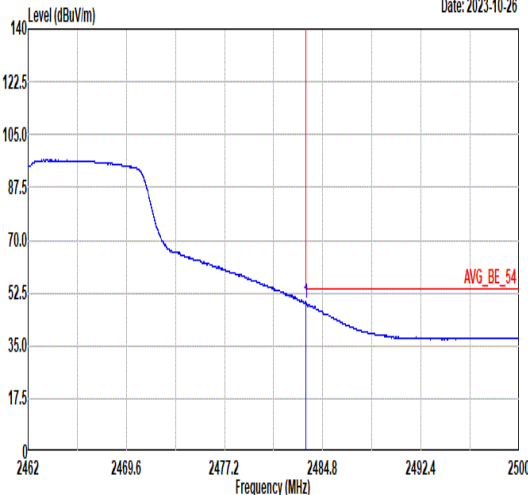





Mode	9	
	Band Edge	
	2400-2483.5_802.11n HT20_CH11_2462MHz	
ANT	5	
Pol.	Horizontal	Fundamental
Peak	Date: 2023-10-26  1 2484.41 66.56 74.00 -7.44 58.31 32.47 7.88 32.10 381 43 PEAK	Date: 2023-10-26  1 2462.00 104.58 ----- 96.39 32.42 7.86 32.09 381 43 PEAK
	Avg	Date: 2023-10-26  1 2483.50 49.22 54.00 -4.78 40.98 32.46 7.88 32.10 381 43 AVERAGE





Mode	9																																																																									
	Band Edge																																																																									
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																									
ANT	5																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	Level (dBuV/m) Date: 2023-10-26 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2462 2469.6 2477.2 2484.8 2492.4 2500 Frequency (MHz) PEAK_BE_74 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.33</td><td>64.41</td><td>74.00</td><td>-9.59</td><td>56.16</td><td>32.47</td><td>7.88</td><td>32.10 303 81 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2484.33	64.41	74.00	-9.59	56.16	32.47	7.88	32.10 303 81 PEAK	Level (dBuV/m) Date: 2023-10-26 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400 1800 2200 2600 3000 Frequency (MHz) PEAK_74 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>98.99</td><td>-----</td><td>-----</td><td>90.79</td><td>32.43</td><td>7.86</td><td>32.09 303 81 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	98.99	-----	-----	90.79	32.43	7.86	32.09 303 81 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	2484.33	64.41	74.00	-9.59	56.16	32.47	7.88	32.10 303 81 PEAK																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	2462.00	98.99	-----	-----	90.79	32.43	7.86	32.09 303 81 PEAK																																																																		
Avg	Level (dBuV/m) Date: 2023-10-26 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2462 2469.6 2477.2 2484.8 2492.4 2500 Frequency (MHz) AVG_BE_54 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.60</td><td>46.55</td><td>54.00</td><td>-7.45</td><td>38.31</td><td>32.46</td><td>7.88</td><td>32.10 303 81 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.60	46.55	54.00	-7.45	38.31	32.46	7.88	32.10 303 81 AVERAGE	Level (dBuV/m) Date: 2023-10-26 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400 1800 2200 2600 3000 Frequency (MHz) AVG_54 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>91.40</td><td>-----</td><td>-----</td><td>83.20</td><td>32.43</td><td>7.86</td><td>32.09 303 81 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	91.40	-----	-----	83.20	32.43	7.86	32.09 303 81 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	2483.60	46.55	54.00	-7.45	38.31	32.46	7.88	32.10 303 81 AVERAGE																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	2462.00	91.40	-----	-----	83.20	32.43	7.86	32.09 303 81 AVERAGE																																																																		

Mode	9																																																																											
	Harmonic																																																																											
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																											
ANT	5																																																																											
Pol.	Horizontal					Vertical																																																																						
Peak Avg	Level (dBuV/m) Date: 2023-10-26 Limit Read Ant Cable Preamp APos TPos Freq Level Line Margin Level Factor Loss Factor Remark <table><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>43.71</td><td>74.00</td><td>-30.29</td><td>50.42</td><td>33.70</td><td>11.12</td><td>51.53</td><td>--</td><td>-- Peak</td></tr><tr><td>2</td><td>7386.00</td><td>46.27</td><td>74.00</td><td>-27.73</td><td>48.54</td><td>35.78</td><td>13.13</td><td>51.18</td><td>--</td><td>-- Peak</td></tr></table>						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg		1	4924.00	43.71	74.00	-30.29	50.42	33.70	11.12	51.53	--	-- Peak	2	7386.00	46.27	74.00	-27.73	48.54	35.78	13.13	51.18	--	-- Peak	Level (dBuV/m) Date: 2023-10-26 Limit Read Ant Cable Preamp APos TPos Freq Level Line Margin Level Factor Loss Factor Remark <table><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>44.32</td><td>74.00</td><td>-29.68</td><td>51.03</td><td>33.70</td><td>11.12</td><td>51.53</td><td>--</td><td>-- Peak</td></tr><tr><td>2</td><td>7386.00</td><td>46.56</td><td>74.00</td><td>-27.44</td><td>48.83</td><td>35.78</td><td>13.13</td><td>51.18</td><td>--</td><td>-- Peak</td></tr></table>						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg		1	4924.00	44.32	74.00	-29.68	51.03	33.70	11.12	51.53	--	-- Peak	2	7386.00	46.56	74.00	-27.44	48.83	35.78	13.13	51.18	--	-- Peak
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																		
	1	4924.00	43.71	74.00	-30.29	50.42	33.70	11.12	51.53	--	-- Peak																																																																	
2	7386.00	46.27	74.00	-27.73	48.54	35.78	13.13	51.18	--	-- Peak																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																			
1	4924.00	44.32	74.00	-29.68	51.03	33.70	11.12	51.53	--	-- Peak																																																																		
2	7386.00	46.56	74.00	-27.44	48.83	35.78	13.13	51.18	--	-- Peak																																																																		

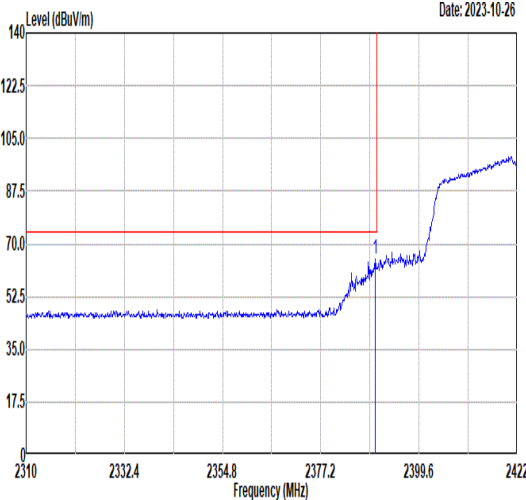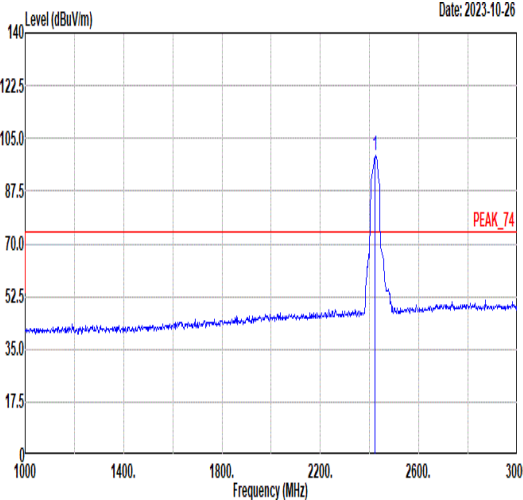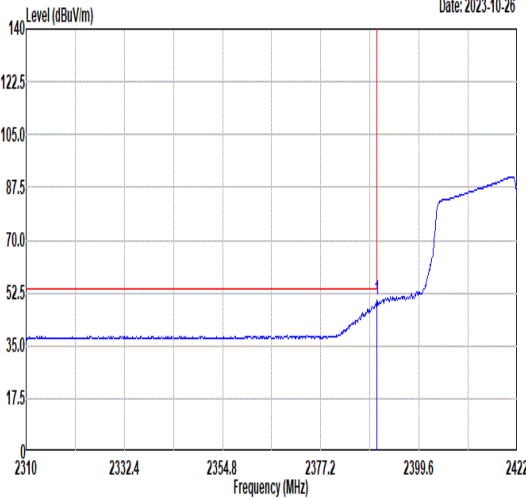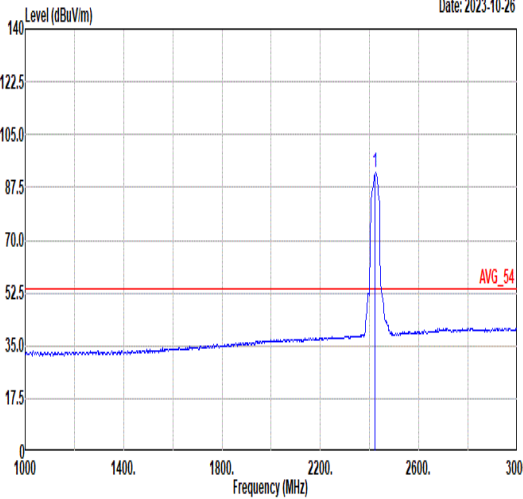

Mode	10																																																																																								
	Band Edge - L																																																																																								
	2400-2483.5_802.11n_HT40_CH03_2422MHz																																																																																								
ANT	5																																																																																								
Pol.	Horizontal					Fundamental																																																																																			
Peak																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2389.63</td><td>65.06</td><td>74.00</td><td>-8.94</td><td>57.12</td><td>32.26</td><td>7.76</td><td>32.08</td><td>400</td><td>31 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2389.63	65.06	74.00	-8.94	57.12	32.26	7.76	32.08	400	31 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2422.00</td><td>99.45</td><td>-----</td><td>-----</td><td>91.38</td><td>32.33</td><td>7.82</td><td>32.08</td><td>400</td><td>31 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2422.00	99.45	-----	-----	91.38	32.33	7.82	32.08	400
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2389.63	65.06	74.00	-8.94	57.12	32.26	7.76	32.08	400	31 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2422.00	99.45	-----	-----	91.38	32.33	7.82	32.08	400	31 PEAK																																																																																
Avg																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2389.97</td><td>49.94</td><td>54.00</td><td>-4.06</td><td>42.00</td><td>32.26</td><td>7.76</td><td>32.08</td><td>400</td><td>31 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2389.97	49.94	54.00	-4.06	42.00	32.26	7.76	32.08	400	31 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2422.00</td><td>92.28</td><td>-----</td><td>-----</td><td>84.21</td><td>32.33</td><td>7.82</td><td>32.08</td><td>400</td><td>31 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2422.00	92.28	-----	-----	84.21	32.33	7.82	32.08	400
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2389.97	49.94	54.00	-4.06	42.00	32.26	7.76	32.08	400	31 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2422.00	92.28	-----	-----	84.21	32.33	7.82	32.08	400	31 AVERAGE																																																																																

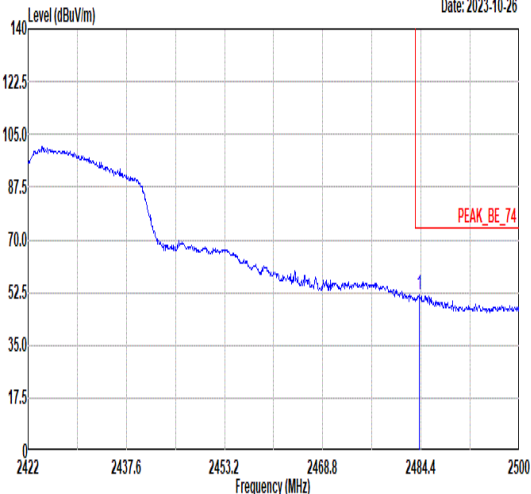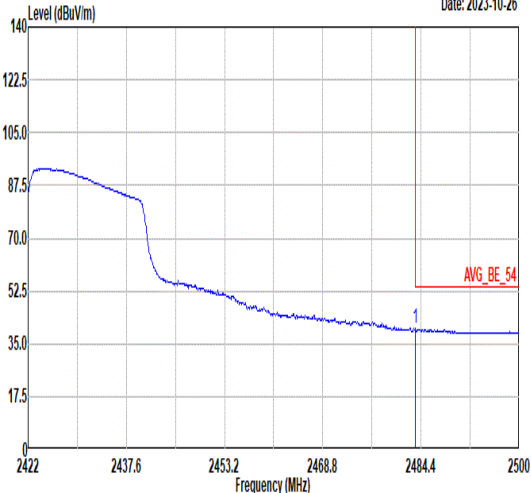

Mode	10																																													
	Band Edge - R																																													
	2400-2483.5_802.11n HT40_CH03_2422MHz																																													
ANT	5																																													
Pol.	Horizontal					Fundamental																																								
Peak	Date: 2023-10-26 					Blank																																								
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.17</td><td>52.01</td><td>74.00</td><td>-21.99</td><td>43.76</td><td>32.47</td><td>7.88</td><td>32.10</td><td>400</td><td>31</td><td>PEAK</td></tr></table>											Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2484.17	52.01	74.00	-21.99	43.76
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																					
1	2484.17	52.01	74.00	-21.99	43.76	32.47	7.88	32.10	400	31	PEAK																																			
Avg	Date: 2023-10-26 					Blank																																								
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.54</td><td>40.04</td><td>54.00</td><td>-13.96</td><td>31.80</td><td>32.46</td><td>7.88</td><td>32.10</td><td>400</td><td>31</td><td>AVERAGE</td></tr></table>											Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2483.54	40.04	54.00	-13.96	31.80
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																					
1	2483.54	40.04	54.00	-13.96	31.80	32.46	7.88	32.10	400	31	AVERAGE																																			







Mode	10																																																																																								
	Band Edge - L																																																																																								
	2400-2483.5_802.11n HT40_CH03_2422MHz																																																																																								
ANT	5																																																																																								
Pol.	Vertical					Fundamental																																																																																			
Peak	Date: 2023-10-26					Date: 2023-10-26																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2389.63</td><td>57.17</td><td>74.00</td><td>-16.83</td><td>49.23</td><td>32.26</td><td>7.76</td><td>32.08</td><td>360</td><td>81 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2389.63	57.17	74.00	-16.83	49.23	32.26	7.76	32.08	360	81 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2422.00</td><td>92.71</td><td>-----</td><td>-----</td><td>84.63</td><td>32.34</td><td>7.82</td><td>32.08</td><td>360</td><td>81 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2422.00	92.71	-----	-----	84.63	32.34	7.82	32.08	360
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2389.63	57.17	74.00	-16.83	49.23	32.26	7.76	32.08	360	81 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2422.00	92.71	-----	-----	84.63	32.34	7.82	32.08	360	81 PEAK																																																																																
Avg	Date: 2023-10-26					Date: 2023-10-26																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2389.63</td><td>44.05</td><td>54.00</td><td>-9.95</td><td>36.11</td><td>32.26</td><td>7.76</td><td>32.08</td><td>360</td><td>81 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2389.63	44.05	54.00	-9.95	36.11	32.26	7.76	32.08	360	81 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2422.00</td><td>85.33</td><td>-----</td><td>-----</td><td>77.25</td><td>32.34</td><td>7.82</td><td>32.08</td><td>360</td><td>81 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2422.00	85.33	-----	-----	77.25	32.34	7.82	32.08	360
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2389.63	44.05	54.00	-9.95	36.11	32.26	7.76	32.08	360	81 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2422.00	85.33	-----	-----	77.25	32.34	7.82	32.08	360	81 AVERAGE																																																																																





Mode	10									
	Band Edge - R									
	2400-2483.5_802.11n HT40_CH03_2422MHz									
ANT	5									
Pol.	Vertical					Fundamental				
Peak										

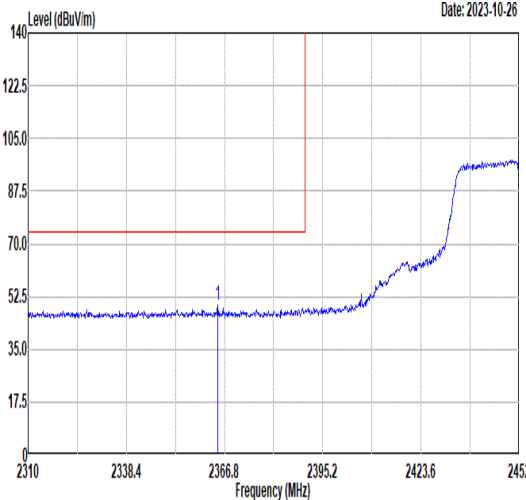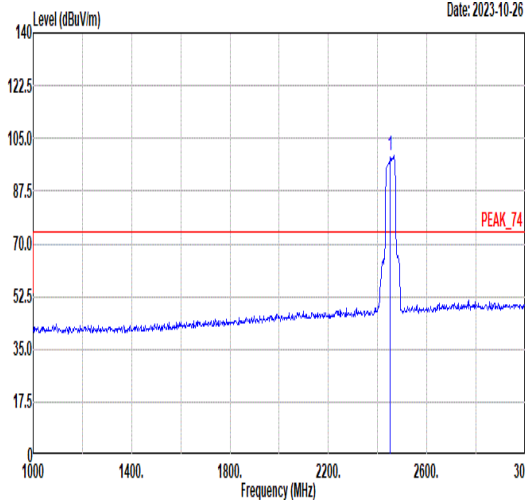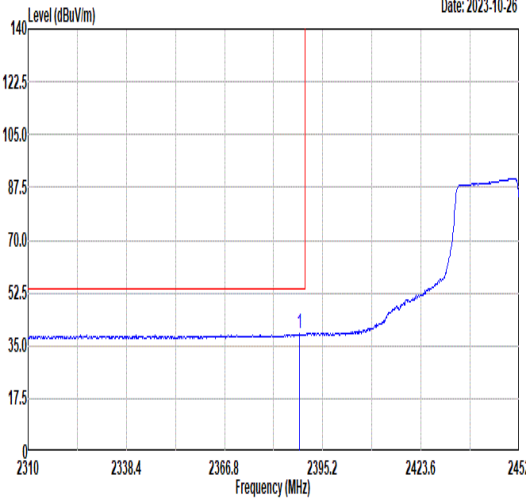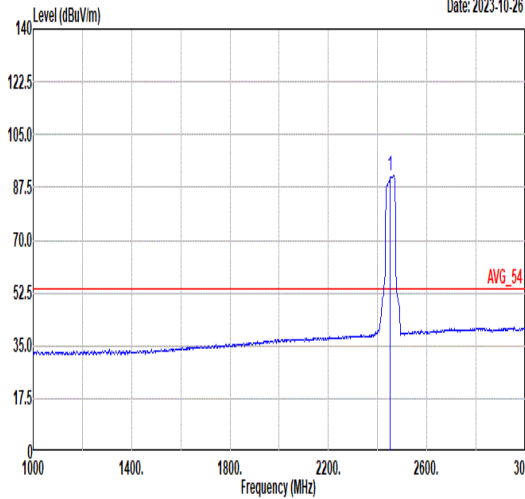

Mode	11																																																																																								
	Band Edge - L																																																																																								
	2400-2483.5_802.11n HT40_CH09_2452MHz																																																																																								
ANT	5																																																																																								
Pol.	Horizontal					Fundamental																																																																																			
Peak																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2364.81</td><td>49.49</td><td>74.00</td><td>-24.51</td><td>41.67</td><td>32.20</td><td>7.69</td><td>32.07</td><td>380 43 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2364.81	49.49	74.00	-24.51	41.67	32.20	7.69	32.07	380 43 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>99.20</td><td>-----</td><td>-----</td><td>91.00</td><td>32.43</td><td>7.86</td><td>32.09</td><td>380 43 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	99.20	-----	-----	91.00	32.43	7.86	32.09
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2364.81	49.49	74.00	-24.51	41.67	32.20	7.69	32.07	380 43 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2452.00	99.20	-----	-----	91.00	32.43	7.86	32.09	380 43 PEAK																																																																																
Avg																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.53</td><td>38.97</td><td>54.00</td><td>-15.03</td><td>31.04</td><td>32.25</td><td>7.76</td><td>32.08</td><td>43 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2388.53	38.97	54.00	-15.03	31.04	32.25	7.76	32.08	43 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>91.34</td><td>-----</td><td>-----</td><td>83.14</td><td>32.43</td><td>7.86</td><td>32.09</td><td>43 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	91.34	-----	-----	83.14	32.43	7.86	32.09
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2388.53	38.97	54.00	-15.03	31.04	32.25	7.76	32.08	43 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2452.00	91.34	-----	-----	83.14	32.43	7.86	32.09	43 AVERAGE																																																																																

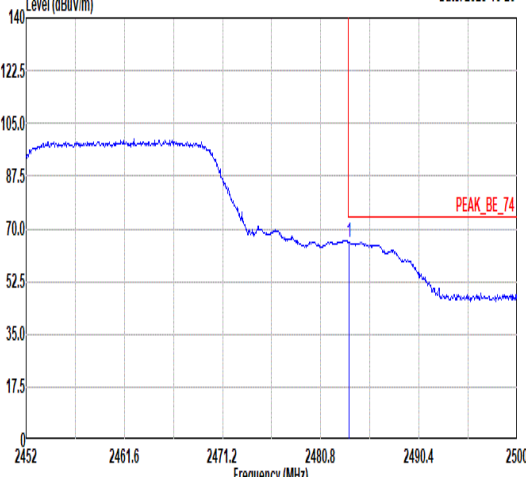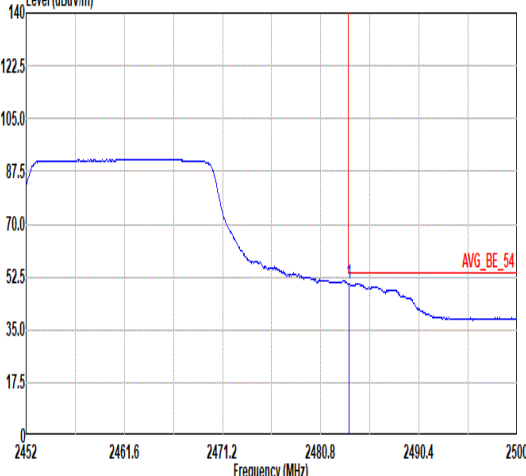

Mode	11																																									
	Band Edge - R																																									
	2400-2483.5_802.11n HT40_CH09_2452MHz																																									
ANT	5																																									
Pol.	Horizontal	Fundamental																																								
Peak	Date: 2023-10-26 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.54</td><td>65.57</td><td>74.00</td><td>-8.43</td><td>57.33</td><td>32.46</td><td>7.88</td><td>32.10</td><td>380 43 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.54	65.57	74.00	-8.43	57.33	32.46	7.88	32.10	380 43 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	2483.54	65.57	74.00	-8.43	57.33	32.46	7.88	32.10	380 43 PEAK																																	
Avg	Date: 2023-10-26 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.58</td><td>50.40</td><td>54.00</td><td>-3.60</td><td>42.16</td><td>32.46</td><td>7.88</td><td>32.10</td><td>380 43 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.58	50.40	54.00	-3.60	42.16	32.46	7.88	32.10	380 43 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	2483.58	50.40	54.00	-3.60	42.16	32.46	7.88	32.10	380 43 AVERAGE																																	





		11																																																																																												
Mode		Band Edge - L																																																																																												
		2400-2483.5_802.11n HT40_CH09_2452MHz																																																																																												
ANT		5																																																																																												
Pol.		Vertical					Fundamental																																																																																							
Peak	Date: 2023-10-26 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.24</td><td>48.18</td><td>74.00</td><td>-25.82</td><td>40.24</td><td>32.26</td><td>7.76</td><td>32.08</td><td>304</td><td>94 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2389.24	48.18	74.00	-25.82	40.24	32.26	7.76	32.08	304	94 PEAK	Date: 2023-10-26 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2452.00</td><td>92.94</td><td>-----</td><td>-----</td><td>84.74</td><td>32.43</td><td>7.86</td><td>32.09</td><td>304</td><td>94 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2452.00	92.94	-----	-----	84.74	32.43	7.86	32.09	304	94 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	2389.24	48.18	74.00	-25.82	40.24	32.26	7.76	32.08	304	94 PEAK																																																																																				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	2452.00	92.94	-----	-----	84.74	32.43	7.86	32.09	304	94 PEAK																																																																																				
Avg	Date: 2023-10-26 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>39.00</td><td>54.00</td><td>-15.00</td><td>31.06</td><td>32.26</td><td>7.76</td><td>32.08</td><td>304</td><td>94 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2389.95	39.00	54.00	-15.00	31.06	32.26	7.76	32.08	304	94 AVERAGE	Date: 2023-10-26 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2452.00</td><td>85.15</td><td>-----</td><td>-----</td><td>76.95</td><td>32.43</td><td>7.86</td><td>32.09</td><td>304</td><td>94 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2452.00	85.15	-----	-----	76.95	32.43	7.86	32.09	304	94 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	2389.95	39.00	54.00	-15.00	31.06	32.26	7.76	32.08	304	94 AVERAGE																																																																																				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	2452.00	85.15	-----	-----	76.95	32.43	7.86	32.09	304	94 AVERAGE																																																																																				







Mode	11																																									
	Band Edge - R																																									
	2400-2483.5_802.11n HT40_CH09_2452MHz																																									
ANT	5																																									
Pol.	Vertical	Fundamental																																								
Peak	Date: 2023-10-26 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.58</td><td>62.68</td><td>74.00</td><td>-11.32</td><td>54.44</td><td>32.46</td><td>7.88</td><td>32.10</td><td>304 94 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.58	62.68	74.00	-11.32	54.44	32.46	7.88	32.10	304 94 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	2483.58	62.68	74.00	-11.32	54.44	32.46	7.88	32.10	304 94 PEAK																																	
Avg	Date: 2023-10-26 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2484.30</td><td>48.05</td><td>54.00</td><td>-5.95</td><td>39.80</td><td>32.47</td><td>7.88</td><td>32.10</td><td>304 94 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2484.30	48.05	54.00	-5.95	39.80	32.47	7.88	32.10	304 94 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	2484.30	48.05	54.00	-5.95	39.80	32.47	7.88	32.10	304 94 AVERAGE																																	

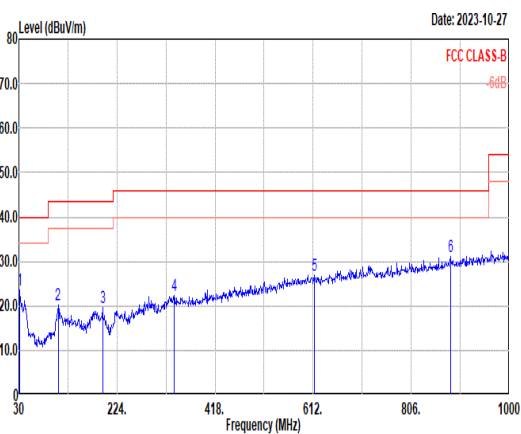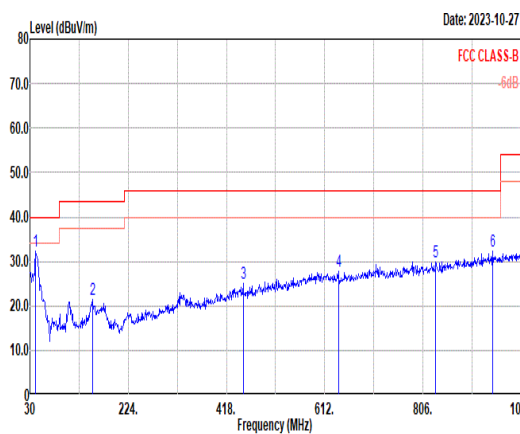

Mode	12																																																																																																																																																																																																					
	LF																																																																																																																																																																																																					
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																																																																																																																																					
ANT	5																																																																																																																																																																																																					
Pol.	Horizontal					Vertical																																																																																																																																																																																																
QPI Peak																																																																																																																																																																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>31.94</td><td>23.67</td><td>40.00</td><td>-16.33</td><td>29.61</td><td>24.04</td><td>1.22</td><td>31.20</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>107.60</td><td>20.27</td><td>43.50</td><td>-23.23</td><td>31.89</td><td>17.62</td><td>1.94</td><td>31.18</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>195.87</td><td>19.50</td><td>43.50</td><td>-24.00</td><td>32.75</td><td>15.38</td><td>2.29</td><td>30.92</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>336.52</td><td>22.33</td><td>46.00</td><td>-23.67</td><td>30.11</td><td>20.20</td><td>2.85</td><td>30.83</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>614.91</td><td>27.01</td><td>46.00</td><td>-18.99</td><td>29.21</td><td>24.99</td><td>3.78</td><td>30.97</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>883.60</td><td>31.17</td><td>46.00</td><td>-14.83</td><td>31.03</td><td>26.70</td><td>4.46</td><td>31.02</td><td>--</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	31.94	23.67	40.00	-16.33	29.61	24.04	1.22	31.20	--	Peak	2	107.60	20.27	43.50	-23.23	31.89	17.62	1.94	31.18	--	Peak	3	195.87	19.50	43.50	-24.00	32.75	15.38	2.29	30.92	--	Peak	4	336.52	22.33	46.00	-23.67	30.11	20.20	2.85	30.83	--	Peak	5	614.91	27.01	46.00	-18.99	29.21	24.99	3.78	30.97	--	Peak	6	883.60	31.17	46.00	-14.83	31.03	26.70	4.46	31.02	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>41.64</td><td>32.41</td><td>40.00</td><td>-7.59</td><td>44.15</td><td>18.12</td><td>1.34</td><td>31.20</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>153.19</td><td>21.52</td><td>43.50</td><td>-21.98</td><td>33.96</td><td>16.44</td><td>2.21</td><td>31.09</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>450.98</td><td>25.06</td><td>46.00</td><td>-20.94</td><td>29.44</td><td>23.01</td><td>3.31</td><td>30.70</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>639.16</td><td>27.72</td><td>46.00</td><td>-18.28</td><td>29.68</td><td>25.14</td><td>3.82</td><td>30.92</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>831.22</td><td>30.02</td><td>46.00</td><td>-15.98</td><td>30.40</td><td>26.35</td><td>4.34</td><td>31.07</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>943.74</td><td>32.32</td><td>46.00</td><td>-13.68</td><td>31.64</td><td>27.06</td><td>4.62</td><td>31.00</td><td>--</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	41.64	32.41	40.00	-7.59	44.15	18.12	1.34	31.20	--	Peak	2	153.19	21.52	43.50	-21.98	33.96	16.44	2.21	31.09	--	Peak	3	450.98	25.06	46.00	-20.94	29.44	23.01	3.31	30.70	--	Peak	4	639.16	27.72	46.00	-18.28	29.68	25.14	3.82	30.92	--	Peak	5	831.22	30.02	46.00	-15.98	30.40	26.35	4.34	31.07	--	Peak	6	943.74	32.32	46.00	-13.68	31.64	27.06	4.62	31.00	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																													
1	31.94	23.67	40.00	-16.33	29.61	24.04	1.22	31.20	--	Peak																																																																																																																																																																																												
2	107.60	20.27	43.50	-23.23	31.89	17.62	1.94	31.18	--	Peak																																																																																																																																																																																												
3	195.87	19.50	43.50	-24.00	32.75	15.38	2.29	30.92	--	Peak																																																																																																																																																																																												
4	336.52	22.33	46.00	-23.67	30.11	20.20	2.85	30.83	--	Peak																																																																																																																																																																																												
5	614.91	27.01	46.00	-18.99	29.21	24.99	3.78	30.97	--	Peak																																																																																																																																																																																												
6	883.60	31.17	46.00	-14.83	31.03	26.70	4.46	31.02	--	Peak																																																																																																																																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																													
1	41.64	32.41	40.00	-7.59	44.15	18.12	1.34	31.20	--	Peak																																																																																																																																																																																												
2	153.19	21.52	43.50	-21.98	33.96	16.44	2.21	31.09	--	Peak																																																																																																																																																																																												
3	450.98	25.06	46.00	-20.94	29.44	23.01	3.31	30.70	--	Peak																																																																																																																																																																																												
4	639.16	27.72	46.00	-18.28	29.68	25.14	3.82	30.92	--	Peak																																																																																																																																																																																												
5	831.22	30.02	46.00	-15.98	30.40	26.35	4.34	31.07	--	Peak																																																																																																																																																																																												
6	943.74	32.32	46.00	-13.68	31.64	27.06	4.62	31.00	--	Peak																																																																																																																																																																																												

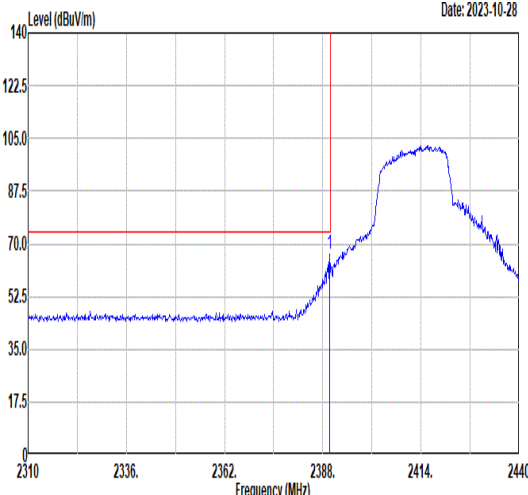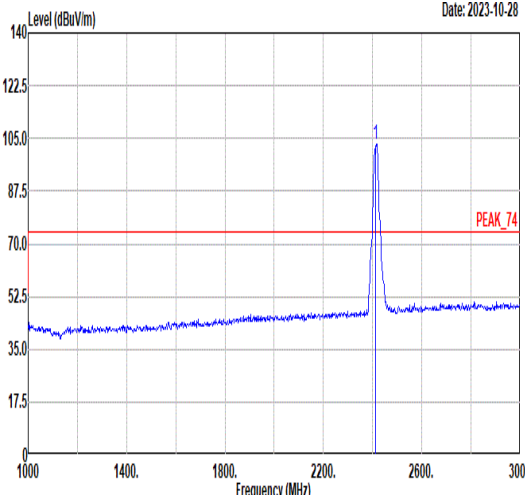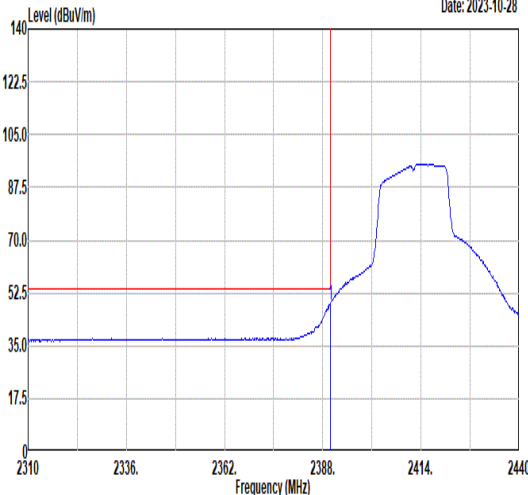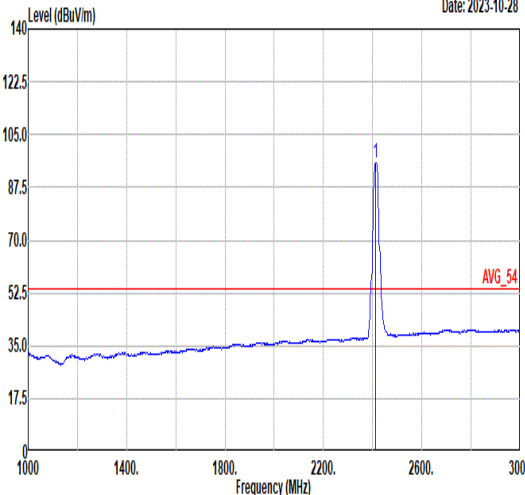

		13																																																																																									
Mode		Band Edge																																																																																									
		2400-2483.5_802.11n HT20_CH01_2412MHz+ Band13 BW5M- Co-location																																																																																									
ANT		5																																																																																									
Pol.		Horizontal					Fundamental																																																																																				
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.82</td><td>66.65</td><td>74.00</td><td>-7.35</td><td>58.71</td><td>32.26</td><td>7.76</td><td>32.08</td><td>400</td><td>36 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	66.65	74.00	-7.35	58.71	32.26	7.76	32.08	400	36 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>103.28</td><td>-----</td><td>-----</td><td>95.23</td><td>32.32</td><td>7.81</td><td>32.08</td><td>400</td><td>36 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	103.28	-----	-----	95.23	32.32	7.81	32.08	400
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2389.82	66.65	74.00	-7.35	58.71	32.26	7.76	32.08	400	36 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2412.00	103.28	-----	-----	95.23	32.32	7.81	32.08	400	36 PEAK																																																																																	
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>48.75</td><td>54.00</td><td>-5.25</td><td>40.81</td><td>32.26</td><td>7.76</td><td>32.08</td><td>400</td><td>36 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	48.75	54.00	-5.25	40.81	32.26	7.76	32.08	400	36 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>95.44</td><td>-----</td><td>-----</td><td>87.39</td><td>32.32</td><td>7.81</td><td>32.08</td><td>400</td><td>36 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	95.44	-----	-----	87.39	32.32	7.81	32.08	400
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2389.95	48.75	54.00	-5.25	40.81	32.26	7.76	32.08	400	36 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2412.00	95.44	-----	-----	87.39	32.32	7.81	32.08	400	36 AVERAGE																																																																																	



Mode	13																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11n HT20_CH01_2412MHz+ Band13 BW5M- Co-location																																																																																									
ANT	5																																																																																									
Pol.	Vertical					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2023-10-28 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.82</td><td>55.75</td><td>74.00</td><td>-18.25</td><td>47.81</td><td>32.26</td><td>7.76</td><td>32.08</td><td>386 87 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	55.75	74.00	-18.25	47.81	32.26	7.76	32.08	386 87 PEAK	Level (dBuV/m) Date: 2023-10-28 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>101.39</td><td>-----</td><td>-----</td><td>93.34</td><td>32.32</td><td>7.81</td><td>32.08</td><td>386 87 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	101.39	-----	-----	93.34	32.32	7.81	32.08	386 87 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2389.82	55.75	74.00	-18.25	47.81	32.26	7.76	32.08	386 87 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2412.00	101.39	-----	-----	93.34	32.32	7.81	32.08	386 87 PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2023-10-28 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>43.50</td><td>54.00</td><td>-10.50</td><td>35.56</td><td>32.26</td><td>7.76</td><td>32.08</td><td>386 87 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	43.50	54.00	-10.50	35.56	32.26	7.76	32.08	386 87 AVERAGE	Level (dBuV/m) Date: 2023-10-28 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>93.47</td><td>-----</td><td>-----</td><td>85.42</td><td>32.32</td><td>7.81</td><td>32.08</td><td>386 87 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	93.47	-----	-----	85.42	32.32	7.81	32.08	386 87 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2389.95	43.50	54.00	-10.50	35.56	32.26	7.76	32.08	386 87 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2412.00	93.47	-----	-----	85.42	32.32	7.81	32.08	386 87 AVERAGE																																																																																	



Mode	13																																																																																															
	Harmonic																																																																																															
	2400-2483.5_802.11n HT20_CH01_2412MHz+ Band13 BW5M- Co-location																																																																																															
ANT	5																																																																																															
Pol.	Horizontal						Vertical																																																																																									
Peak Avg	Level (dBuV/m) Date: 2023-10-28 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 3000 6000 9000 12000 15000 18000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4824.00</td><td>45.24</td><td>74.00</td><td>-28.76</td><td>51.88</td><td>33.85</td><td>11.08</td><td>51.57</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4824.00	45.24	74.00	-28.76	51.88	33.85	11.08	51.57	--	--	Peak	Level (dBuV/m) Date: 2023-10-28 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 3000 6000 9000 12000 15000 18000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4824.00</td><td>46.56</td><td>74.00</td><td>-27.44</td><td>53.20</td><td>33.85</td><td>11.08</td><td>51.57</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4824.00	46.56	74.00	-27.44	53.20	33.85	11.08	51.57	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
	Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	4824.00	45.24	74.00	-28.76	51.88	33.85	11.08	51.57	--	--	Peak																																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	4824.00	46.56	74.00	-27.44	53.20	33.85	11.08	51.57	--	--	Peak																																																																																					







Mode	14	
	Band Edge - L	
	2400-2483.5_802.11n HT40_CH04_2427MHz	
ANT	5	
Pol.	Horizontal	Fundamental
Peak	Date: 2023-10-27 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 2389.86 64.15 74.00 -9.85 56.21 32.26 7.76 32.08 400 31 PEAK	Date: 2023-10-27 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 2427.00 100.92 ----- 92.84 32.34 7.82 32.08 400 31 PEAK
	Date: 2023-10-27 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 2389.41 50.19 54.00 -3.81 42.25 32.26 7.76 32.08 400 31 AVERAGE	Date: 2023-10-27 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 2427.00 94.25 ----- 86.17 32.34 7.82 32.08 400 31 AVERAGE





Mode	14																																																																																									
	Band Edge - L																																																																																									
	2400-2483.5_802.11n HT40_CH04_2427MHz																																																																																									
ANT	5																																																																																									
Pol.	Vertical					Fundamental																																																																																				
Peak	Date: 2023-10-27 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.97</td><td>62.75</td><td>74.00</td><td>-11.25</td><td>54.81</td><td>32.26</td><td>7.76</td><td>32.08</td><td>360 77 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.97	62.75	74.00	-11.25	54.81	32.26	7.76	32.08	360 77 PEAK	Date: 2023-10-27 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2427.00</td><td>96.31</td><td>-----</td><td>-----</td><td>88.22</td><td>32.35</td><td>7.83</td><td>32.09</td><td>360 77 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2427.00	96.31	-----	-----	88.22	32.35	7.83	32.09	360 77 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2389.97	62.75	74.00	-11.25	54.81	32.26	7.76	32.08	360 77 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2427.00	96.31	-----	-----	88.22	32.35	7.83	32.09	360 77 PEAK																																																																																	
Avg	Date: 2023-10-27 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.86</td><td>47.58</td><td>54.00</td><td>-6.42</td><td>39.64</td><td>32.26</td><td>7.76</td><td>32.08</td><td>360 77 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.86	47.58	54.00	-6.42	39.64	32.26	7.76	32.08	360 77 AVERAGE	Date: 2023-10-27 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2427.00</td><td>90.26</td><td>-----</td><td>-----</td><td>82.18</td><td>32.34</td><td>7.82</td><td>32.08</td><td>360 77 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2427.00	90.26	-----	-----	82.18	32.34	7.82	32.08	360 77 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2389.86	47.58	54.00	-6.42	39.64	32.26	7.76	32.08	360 77 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2427.00	90.26	-----	-----	82.18	32.34	7.82	32.08	360 77 AVERAGE																																																																																	

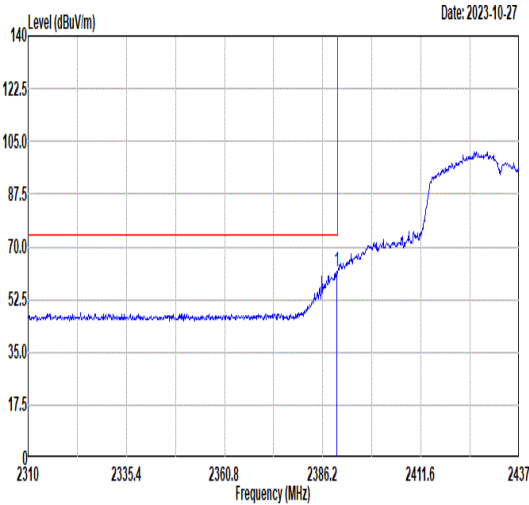
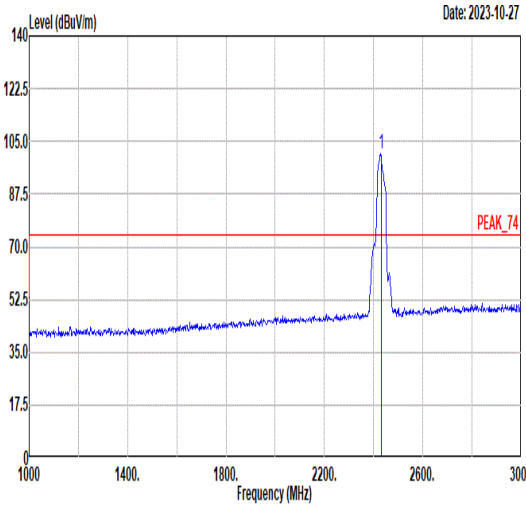
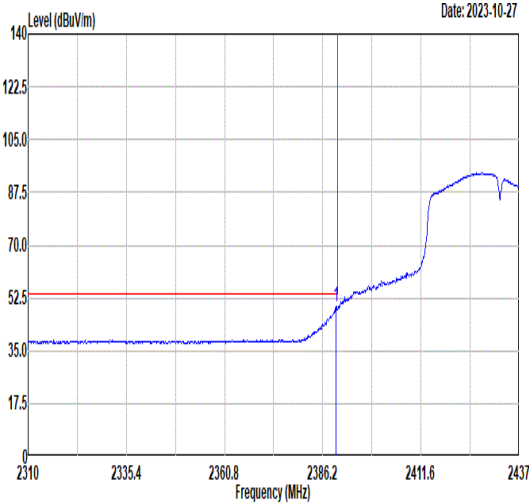
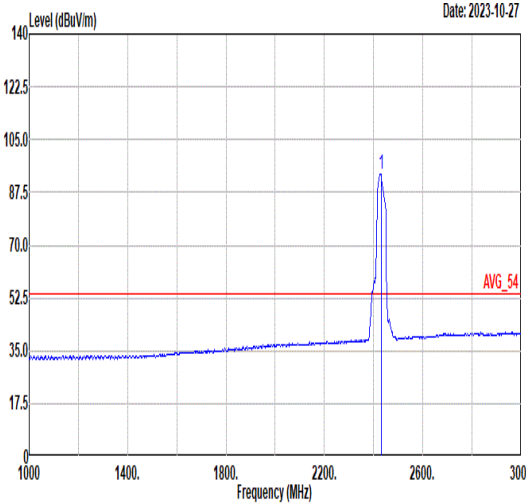


Mode	15																																																																																			
	Band Edge - L																																																																																			
	2400-2483.5_802.11n_HT40_CH05_2432MHz																																																																																			
ANT	5																																																																																			
Pol.	Horizontal					Fundamental																																																																														
Peak	 Level (dBuV/m) Date: 2023-10-27 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.88</td><td>61.66</td><td>74.00</td><td>-12.34</td><td>53.72</td><td>32.26</td><td>7.76</td><td>32.08</td><td>400 32 PEAK</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.88	61.66	74.00	-12.34	53.72	32.26	7.76	32.08	400 32 PEAK	 Level (dBuV/m) Date: 2023-10-27 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2432.00</td><td>100.69</td><td>-----</td><td>-----</td><td>92.61</td><td>32.34</td><td>7.82</td><td>32.08</td><td>400 32 PEAK</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2432.00	100.69	-----	-----	92.61	32.34	7.82	32.08	400 32 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	2389.88	61.66	74.00	-12.34	53.72	32.26	7.76	32.08	400 32 PEAK																																																																											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	2432.00	100.69	-----	-----	92.61	32.34	7.82	32.08	400 32 PEAK																																																																											
Avg	 Level (dBuV/m) Date: 2023-10-27 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.63</td><td>49.80</td><td>54.00</td><td>-4.20</td><td>41.86</td><td>32.26</td><td>7.76</td><td>32.08</td><td>400 32 AVERAGE</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.63	49.80	54.00	-4.20	41.86	32.26	7.76	32.08	400 32 AVERAGE	 Level (dBuV/m) Date: 2023-10-27 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2432.00</td><td>93.74</td><td>-----</td><td>-----</td><td>85.66</td><td>32.34</td><td>7.82</td><td>32.08</td><td>400 32 AVERAGE</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2432.00	93.74	-----	-----	85.66	32.34	7.82	32.08	400 32 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	2389.63	49.80	54.00	-4.20	41.86	32.26	7.76	32.08	400 32 AVERAGE																																																																											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	2432.00	93.74	-----	-----	85.66	32.34	7.82	32.08	400 32 AVERAGE																																																																											

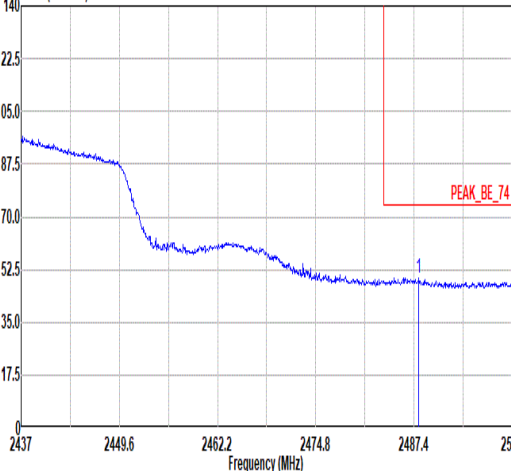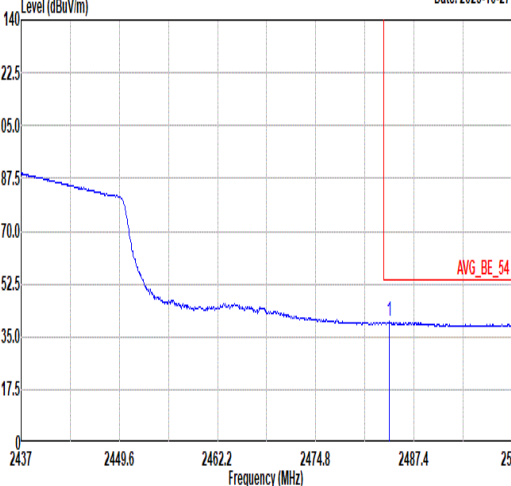

Mode	15																																																	
	Band Edge - R																																																	
	2400-2483.5_802.11n HT40_CH05_2432MHz																																																	
ANT	5																																																	
Pol.	Horizontal					Fundamental																																												
Peak	Date: 2023-10-27  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2488.03</td><td>49.72</td><td>74.00</td><td>-24.28</td><td>41.47</td><td>32.47</td><td>7.88</td><td>32.10</td><td>400 32 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2488.03	49.72	74.00	-24.28	41.47	32.47	7.88	32.10	400 32 PEAK	Blank				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																									
1	2488.03	49.72	74.00	-24.28	41.47	32.47	7.88	32.10	400 32 PEAK																																									
Avg	Date: 2023-10-27  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.19</td><td>40.21</td><td>54.00</td><td>-13.79</td><td>31.96</td><td>32.47</td><td>7.88</td><td>32.10</td><td>400 32 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2484.19	40.21	54.00	-13.79	31.96	32.47	7.88	32.10	400 32 AVERAGE	Blank				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																									
1	2484.19	40.21	54.00	-13.79	31.96	32.47	7.88	32.10	400 32 AVERAGE																																									

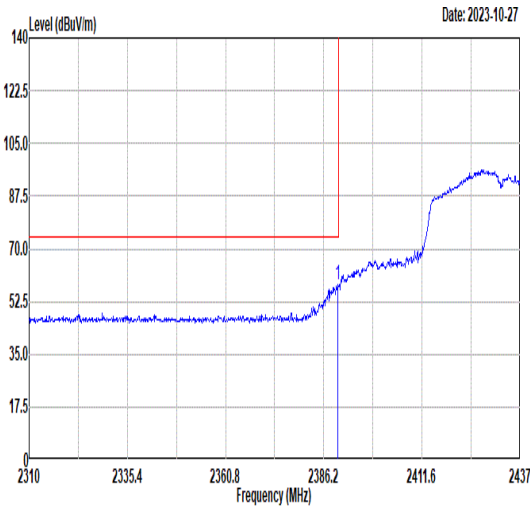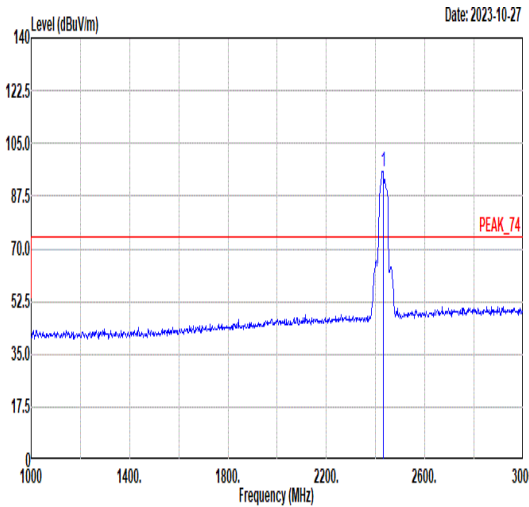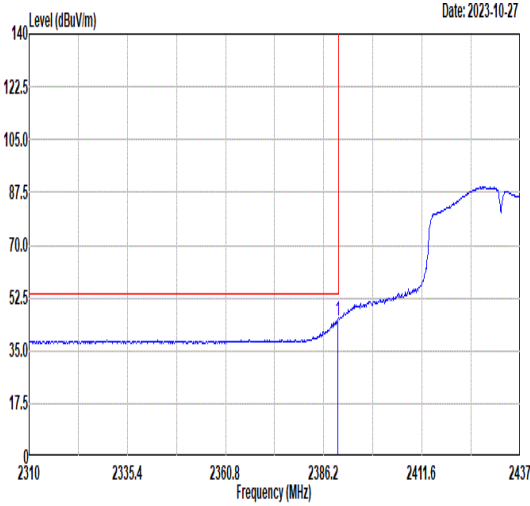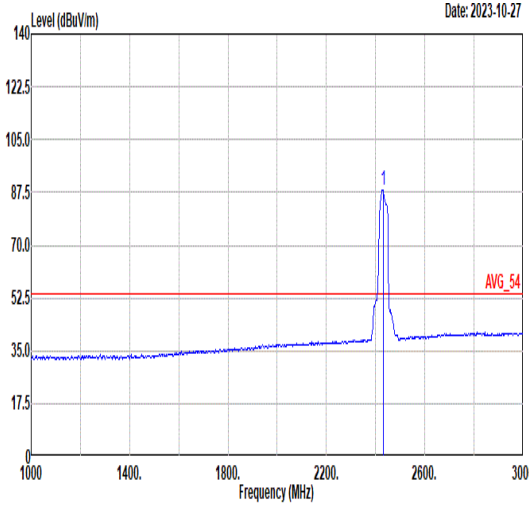

		15																																																																																				
Mode		Band Edge - L																																																																																				
		2400-2483.5_802.11n HT40_CH05_2432MHz																																																																																				
ANT		5																																																																																				
Pol.		Vertical					Fundamental																																																																															
Peak	 Level (dBuV/m) vs Frequency (MHz). The plot shows a rising signal starting around 2386.2 MHz, reaching approximately 85 dBuV/m at 2437 MHz. A red limit line is at 70.0 dBuV/m.					 Level (dBuV/m) vs Frequency (MHz). The plot shows a sharp peak at 2432 MHz reaching approximately 95 dBuV/m. A red limit line is at 70.0 dBuV/m, labeled PEAK_74.																																																																																
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.76	58.31	74.00	-15.69	50.37	32.26	7.76	32.08	360	81 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2432.00</td><td>95.67</td><td>-----</td><td>-----</td><td>87.59</td><td>32.34</td><td>7.82</td><td>32.08</td><td>360</td><td>81 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2432.00	95.67	-----	-----	87.59	32.34	7.82	32.08	360
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																													
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	2389.76	58.31	74.00	-15.69	50.37	32.26	7.76	32.08	360	81 PEAK																																																																												
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																													
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	2432.00	95.67	-----	-----	87.59	32.34	7.82	32.08	360	81 PEAK																																																																												
Avg	 Level (dBuV/m) vs Frequency (MHz). The plot shows a rising signal starting around 2386.2 MHz, reaching approximately 85 dBuV/m at 2437 MHz. A red limit line is at 52.5 dBuV/m.					 Level (dBuV/m) vs Frequency (MHz). The plot shows a sharp peak at 2432 MHz reaching approximately 88 dBuV/m. A red limit line is at 52.5 dBuV/m, labeled AVG_54.																																																																																
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.88	45.05	54.00	-8.95	37.11	32.26	7.76	32.08	360	81 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2432.00</td><td>88.43</td><td>-----</td><td>-----</td><td>80.35</td><td>32.34</td><td>7.82</td><td>32.08</td><td>360</td><td>81 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2432.00	88.43	-----	-----	80.35	32.34	7.82	32.08	360
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																													
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	2389.88	45.05	54.00	-8.95	37.11	32.26	7.76	32.08	360	81 AVERAGE																																																																												
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																													
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	2432.00	88.43	-----	-----	80.35	32.34	7.82	32.08	360	81 AVERAGE																																																																												



Mode	15																																																																	
	Band Edge - R																																																																	
	2400-2483.5_802.11n HT40_CH05_2432MHz																																																																	
ANT	5																																																																	
Pol.	Vertical	Fundamental																																																																
Peak	Date: 2023-10-27 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1</td><td>2486.58</td><td>51.27</td><td>74.00</td><td>-22.73</td><td>43.02</td><td>32.47</td><td>7.88</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>32.10</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>360</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>81</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2486.58	51.27	74.00	-22.73	43.02	32.47	7.88								32.10								360								81								PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																											
Freq	Level	Line	Level	Factor	Loss	Factor	Remark																																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																											
1	2486.58	51.27	74.00	-22.73	43.02	32.47	7.88																																																											
							32.10																																																											
							360																																																											
							81																																																											
							PEAK																																																											
Avg	Date: 2023-10-27 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1</td><td>2485.20</td><td>40.45</td><td>54.00</td><td>-13.55</td><td>32.20</td><td>32.47</td><td>7.88</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>32.10</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>360</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>81</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2485.20	40.45	54.00	-13.55	32.20	32.47	7.88								32.10								360								81								AVERAGE	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																											
Freq	Level	Line	Level	Factor	Loss	Factor	Remark																																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																											
1	2485.20	40.45	54.00	-13.55	32.20	32.47	7.88																																																											
							32.10																																																											
							360																																																											
							81																																																											
							AVERAGE																																																											



Mode	16																																																																																																		
	Band Edge - L																																																																																																		
	2400-2483.5_802.11n HT40_CH06_2437MHz																																																																																																		
ANT	5																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak	Date: 2023-10-28 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.88</td><td>65.02</td><td>74.00</td><td>-8.98</td><td>57.08</td><td>32.26</td><td>7.76</td><td>32.08</td><td>399</td><td>156 PEAK</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	2389.88	65.02	74.00	-8.98	57.08	32.26	7.76	32.08	399	156 PEAK	Date: 2023-10-28 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2437.00</td><td>101.92</td><td>-----</td><td>93.84</td><td>32.34</td><td>7.82</td><td>32.08</td><td>399</td><td>156</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	2437.00	101.92	-----	93.84	32.34	7.82	32.08	399	156	PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2389.88	65.02	74.00	-8.98	57.08	32.26	7.76	32.08	399	156 PEAK																																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2437.00	101.92	-----	93.84	32.34	7.82	32.08	399	156	PEAK																																																																																									
Avg	Date: 2023-10-28 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.76</td><td>50.40</td><td>54.00</td><td>-3.60</td><td>42.46</td><td>32.26</td><td>7.76</td><td>32.08</td><td>399</td><td>156 AVERAGE</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	2389.76	50.40	54.00	-3.60	42.46	32.26	7.76	32.08	399	156 AVERAGE	Date: 2023-10-28 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2437.00</td><td>94.37</td><td>-----</td><td>86.29</td><td>32.34</td><td>7.82</td><td>32.08</td><td>399</td><td>156</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	2437.00	94.37	-----	86.29	32.34	7.82	32.08	399	156	AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2389.76	50.40	54.00	-3.60	42.46	32.26	7.76	32.08	399	156 AVERAGE																																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2437.00	94.37	-----	86.29	32.34	7.82	32.08	399	156	AVERAGE																																																																																									



Mode	16																																	
	Band Edge - R																																	
	2400-2483.5_802.11n HT40_CH06_2437MHz																																	
ANT	5																																	
Pol.	Horizontal	Fundamental																																
Peak	Date: 2023-10-28 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>2484.50</td><td>52.90</td><td>74.00</td><td>-21.10</td><td>44.65</td><td>32.47</td><td>7.88</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2484.50	52.90	74.00	-21.10	44.65	32.47	7.88	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																											
1	2484.50	52.90	74.00	-21.10	44.65	32.47	7.88																											
Avg	Date: 2023-10-28 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>2484.06</td><td>40.54</td><td>54.00</td><td>-13.46</td><td>32.30</td><td>32.46</td><td>7.88</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2484.06	40.54	54.00	-13.46	32.30	32.46	7.88	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																											
1	2484.06	40.54	54.00	-13.46	32.30	32.46	7.88																											







Mode	16																																																																																	
	Band Edge - L																																																																																	
	2400-2483.5_802.11n HT40_CH06_2437MHz																																																																																	
ANT	5																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Date: 2023-10-28 Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.88</td><td>57.60</td><td>74.00</td><td>-16.40</td><td>49.66</td><td>32.26</td><td>7.76</td><td>32.08</td><td>400 92 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.88	57.60	74.00	-16.40	49.66	32.26	7.76	32.08	400 92 PEAK	Date: 2023-10-28 Level (dBuV/m) Frequency (MHz) PEAK_74 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>95.46</td><td>-----</td><td>-----</td><td>87.37</td><td>32.35</td><td>7.83</td><td>32.09</td><td>400 92 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	95.46	-----	-----	87.37	32.35	7.83	32.09	400 92 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2389.88	57.60	74.00	-16.40	49.66	32.26	7.76	32.08	400 92 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2437.00	95.46	-----	-----	87.37	32.35	7.83	32.09	400 92 PEAK																																																																									
Avg	Date: 2023-10-28 Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.76</td><td>45.06</td><td>54.00</td><td>-8.94</td><td>37.12</td><td>32.26</td><td>7.76</td><td>32.08</td><td>400 92 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.76	45.06	54.00	-8.94	37.12	32.26	7.76	32.08	400 92 AVERAGE	Date: 2023-10-28 Level (dBuV/m) Frequency (MHz) AVG_54 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>87.86</td><td>-----</td><td>-----</td><td>79.77</td><td>32.35</td><td>7.83</td><td>32.09</td><td>400 92 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	87.86	-----	-----	79.77	32.35	7.83	32.09	400 92 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2389.76	45.06	54.00	-8.94	37.12	32.26	7.76	32.08	400 92 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2437.00	87.86	-----	-----	79.77	32.35	7.83	32.09	400 92 AVERAGE																																																																									



Mode	16																																										
	Band Edge - R																																										
	2400-2483.5_802.11n HT40_CH06_2437MHz																																										
ANT	5																																										
Pol.	Vertical	Fundamental																																									
Peak	Date: 2023-10-28 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2484.44</td><td>56.56</td><td>74.00</td><td>-17.44</td><td>48.31</td><td>32.47</td><td>7.88</td><td>32.10</td><td>400</td><td>92 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2484.44	56.56	74.00	-17.44	48.31	32.47	7.88	32.10	400	92 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	2484.44	56.56	74.00	-17.44	48.31	32.47	7.88	32.10	400	92 PEAK																																	
Avg	Date: 2023-10-28 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2486.20</td><td>42.23</td><td>54.00</td><td>-11.77</td><td>33.98</td><td>32.47</td><td>7.88</td><td>32.10</td><td>400</td><td>92 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2486.20	42.23	54.00	-11.77	33.98	32.47	7.88	32.10	400	92 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	2486.20	42.23	54.00	-11.77	33.98	32.47	7.88	32.10	400	92 AVERAGE																																	

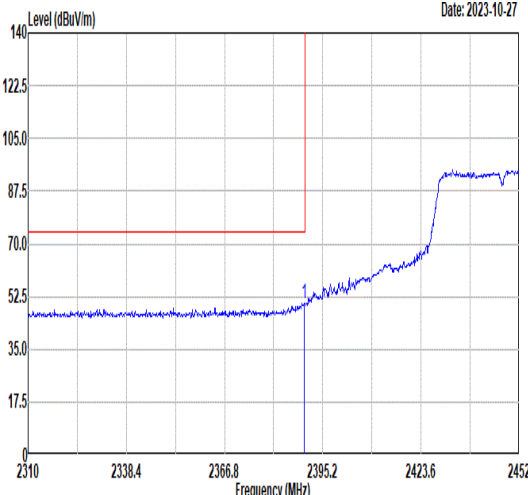
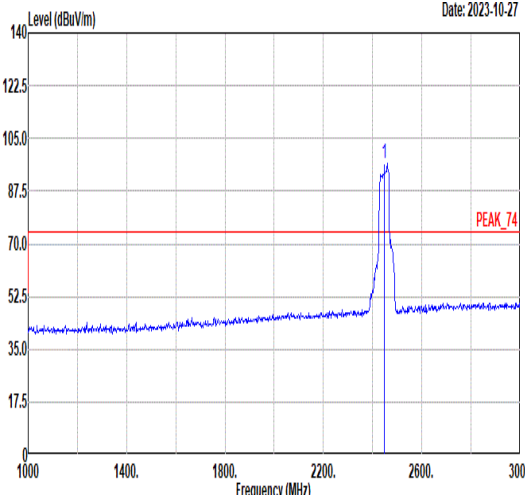
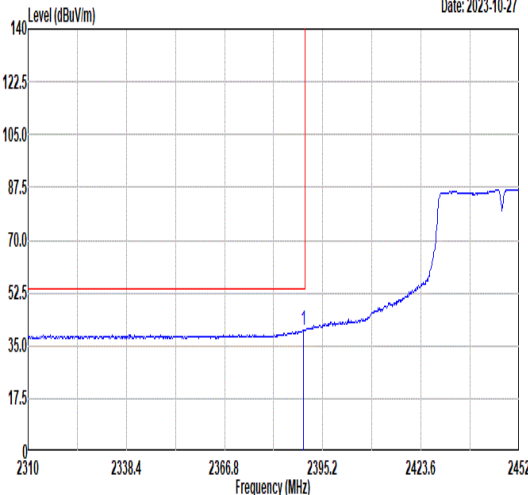
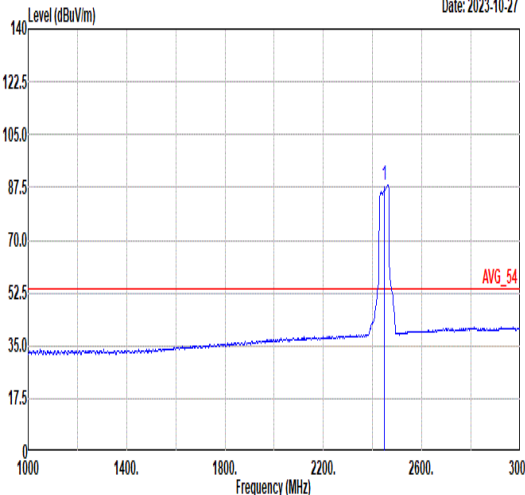


		17																																																																																									
Mode		Band Edge - L																																																																																									
		2400-2483.5_802.11n HT40_CH08_2447MHz																																																																																									
ANT		5																																																																																									
Pol.		Horizontal					Fundamental																																																																																				
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>50.33</td><td>74.00</td><td>-23.67</td><td>42.39</td><td>32.26</td><td>7.76</td><td>32.08</td><td>373</td><td>48 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	50.33	74.00	-23.67	42.39	32.26	7.76	32.08	373	48 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2447.00</td><td>96.62</td><td>-----</td><td>-----</td><td>88.45</td><td>32.41</td><td>7.85</td><td>32.09</td><td>373</td><td>48 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2447.00	96.62	-----	-----	88.45	32.41	7.85	32.09	373
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2389.95	50.33	74.00	-23.67	42.39	32.26	7.76	32.08	373	48 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2447.00	96.62	-----	-----	88.45	32.41	7.85	32.09	373	48 PEAK																																																																																	
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.66</td><td>40.24</td><td>54.00</td><td>-13.76</td><td>32.30</td><td>32.26</td><td>7.76</td><td>32.08</td><td>373</td><td>48 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.66	40.24	54.00	-13.76	32.30	32.26	7.76	32.08	373	48 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2447.00</td><td>88.19</td><td>-----</td><td>-----</td><td>80.00</td><td>32.42</td><td>7.86</td><td>32.09</td><td>373</td><td>48 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2447.00	88.19	-----	-----	80.00	32.42	7.86	32.09	373
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2389.66	40.24	54.00	-13.76	32.30	32.26	7.76	32.08	373	48 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2447.00	88.19	-----	-----	80.00	32.42	7.86	32.09	373	48 AVERAGE																																																																																	





Mode	17																																																	
	Band Edge - R																																																	
	2400-2483.5_802.11n HT40_CH08_2447MHz																																																	
ANT	5																																																	
Pol.	Horizontal						Fundamental																																											
Peak	Date: 2023-10-27 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2486.42</td><td>64.25</td><td>74.00</td><td>-9.75</td><td>56.00</td><td>32.47</td><td>7.88</td><td>32.10</td><td>373</td><td>48</td><td>PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2486.42	64.25	74.00	-9.75	56.00	32.47	7.88	32.10	373	48	PEAK	Blank				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																										
1	2486.42	64.25	74.00	-9.75	56.00	32.47	7.88	32.10	373	48	PEAK																																							
Avg	Date: 2023-10-27 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2484.45</td><td>49.86</td><td>54.00</td><td>-4.14</td><td>41.61</td><td>32.47</td><td>7.88</td><td>32.10</td><td>373</td><td>48</td><td>AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2484.45	49.86	54.00	-4.14	41.61	32.47	7.88	32.10	373	48	AVERAGE	Blank				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																										
1	2484.45	49.86	54.00	-4.14	41.61	32.47	7.88	32.10	373	48	AVERAGE																																							

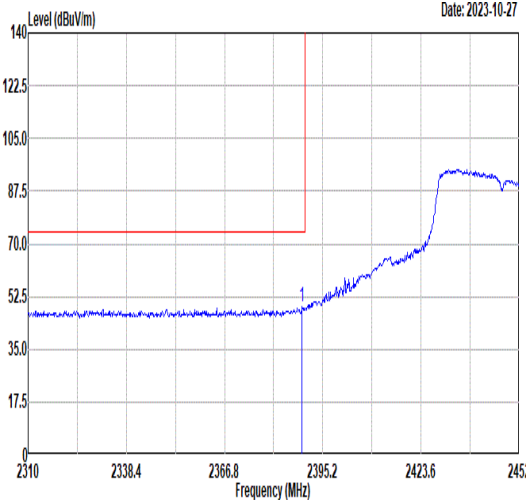
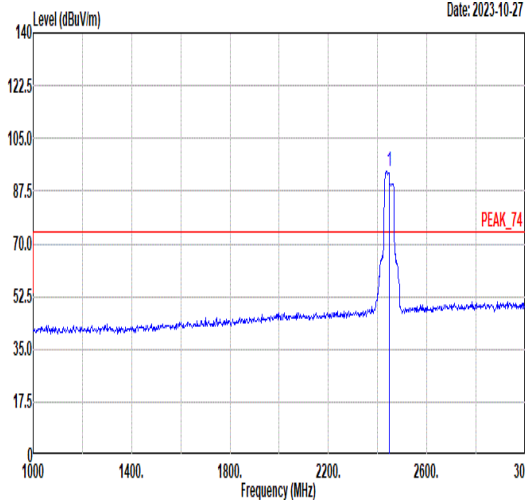
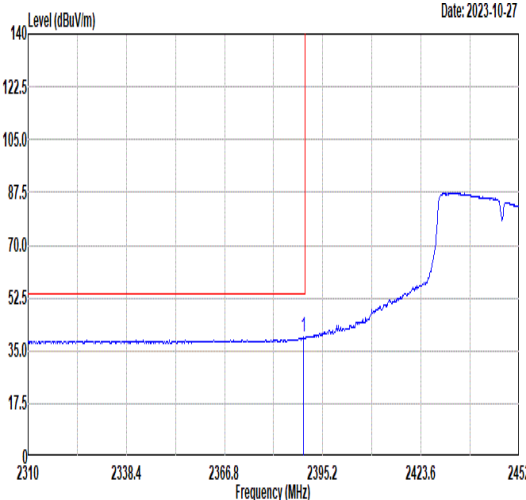
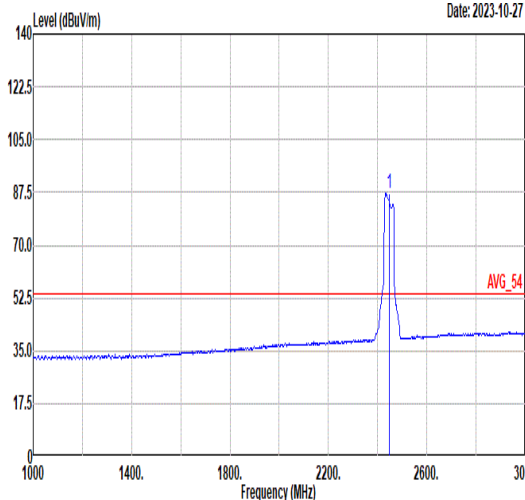


Mode	17																																																																																								
	Band Edge - L																																																																																								
	2400-2483.5_802.11n HT40_CH08_2447MHz																																																																																								
ANT	5																																																																																								
Pol.	Vertical					Fundamental																																																																																			
Peak																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.24</td><td>49.25</td><td>74.00</td><td>-24.75</td><td>41.31</td><td>32.26</td><td>7.76</td><td>32.08</td><td>305 117 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.24	49.25	74.00	-24.75	41.31	32.26	7.76	32.08	305 117 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2447.00</td><td>93.92</td><td>-----</td><td>-----</td><td>85.82</td><td>32.36</td><td>7.83</td><td>32.09</td><td>305 117 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2447.00	93.92	-----	-----	85.82	32.36	7.83	32.09
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2389.24	49.25	74.00	-24.75	41.31	32.26	7.76	32.08	305 117 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2447.00	93.92	-----	-----	85.82	32.36	7.83	32.09	305 117 PEAK																																																																																
Avg																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.52</td><td>39.63</td><td>54.00</td><td>-14.37</td><td>31.69</td><td>32.26</td><td>7.76</td><td>32.08</td><td>305 117 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.52	39.63	54.00	-14.37	31.69	32.26	7.76	32.08	305 117 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2447.00</td><td>87.04</td><td>-----</td><td>-----</td><td>78.95</td><td>32.35</td><td>7.83</td><td>32.09</td><td>305 117 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2447.00	87.04	-----	-----	78.95	32.35	7.83	32.09
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2389.52	39.63	54.00	-14.37	31.69	32.26	7.76	32.08	305 117 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2447.00	87.04	-----	-----	78.95	32.35	7.83	32.09	305 117 AVERAGE																																																																																

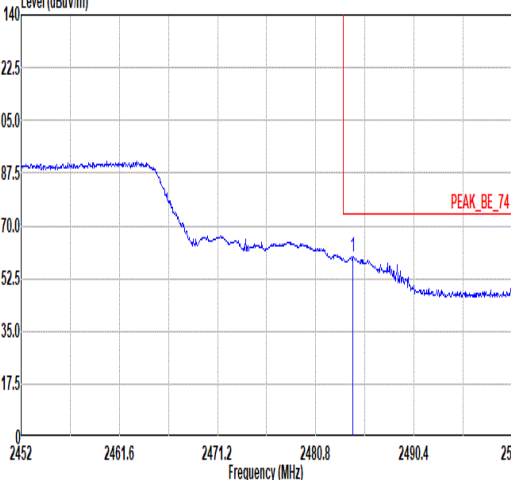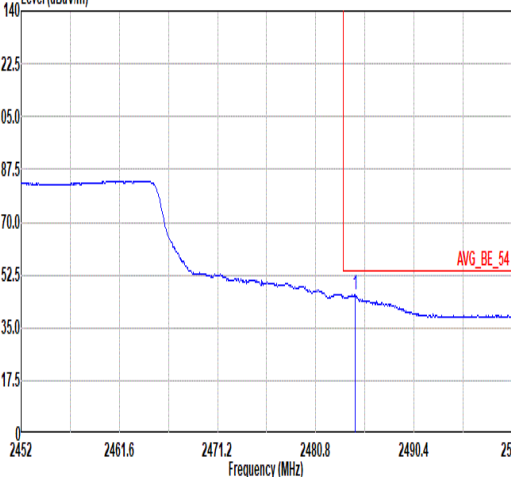

Mode	17																																																		
	Band Edge - R																																																		
	2400-2483.5_802.11n HT40_CH08_2447MHz																																																		
ANT	5																																																		
Pol.	Vertical						Fundamental																																												
Peak	Date: 2023-10-27  <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2484.45</td><td>59.71</td><td>74.00</td><td>-14.29</td><td>51.46</td><td>32.47</td><td>7.88</td><td>32.10</td><td>305 117 PEAK</td></tr></tbody></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2484.45	59.71	74.00	-14.29	51.46	32.47	7.88	32.10	305 117 PEAK	Blank				
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																										
1	2484.45	59.71	74.00	-14.29	51.46	32.47	7.88	32.10	305 117 PEAK																																										
Avg	Date: 2023-10-27  <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2484.64</td><td>45.90</td><td>54.00</td><td>-8.10</td><td>37.65</td><td>32.47</td><td>7.88</td><td>32.10</td><td>305 117 AVERAGE</td></tr></tbody></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2484.64	45.90	54.00	-8.10	37.65	32.47	7.88	32.10	305 117 AVERAGE	Blank				
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																										
1	2484.64	45.90	54.00	-8.10	37.65	32.47	7.88	32.10	305 117 AVERAGE																																										

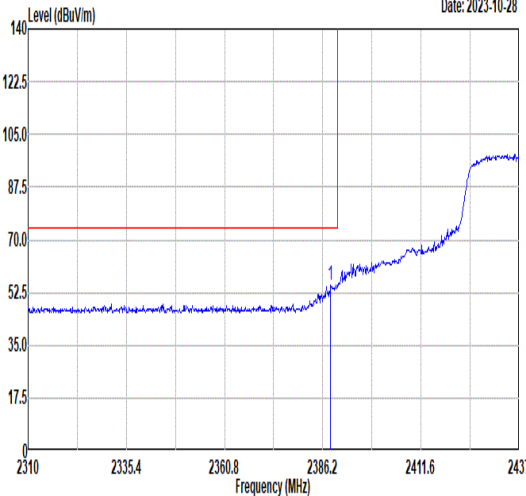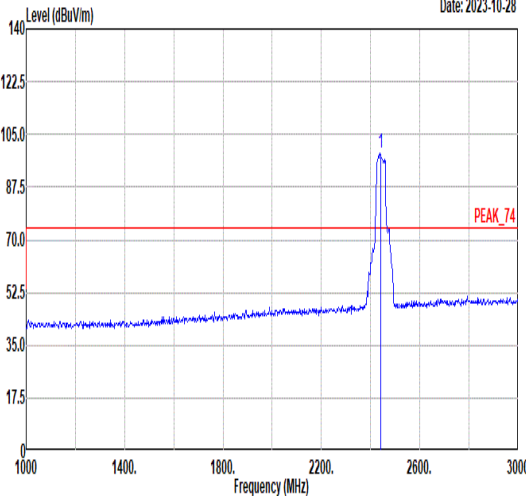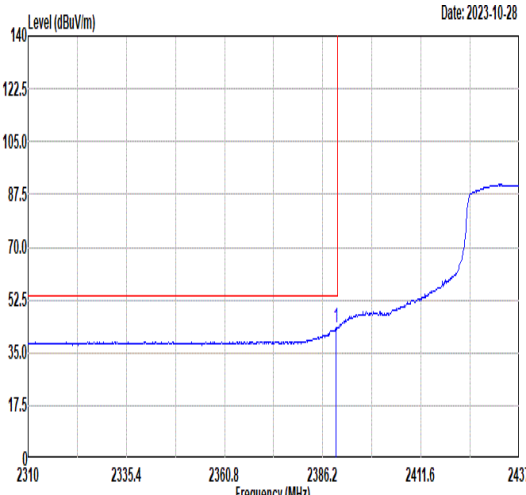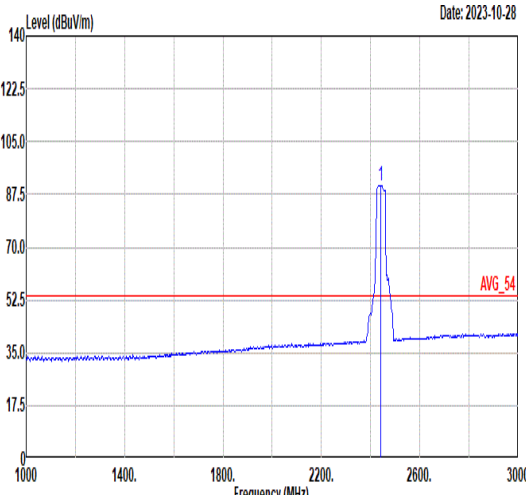

Mode	18																																																																																								
	Band Edge - L																																																																																								
	2400-2483.5_802.11n HT40_CH07_2442MHz																																																																																								
ANT	5																																																																																								
Pol.	Horizontal					Fundamental																																																																																			
Peak																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.23</td><td>54.84</td><td>74.00</td><td>-19.16</td><td>46.91</td><td>32.25</td><td>7.76</td><td>32.08</td><td>377 141 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2388.23	54.84	74.00	-19.16	46.91	32.25	7.76	32.08	377 141 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2442.00</td><td>98.91</td><td>-----</td><td>-----</td><td>90.81</td><td>32.36</td><td>7.83</td><td>32.09</td><td>377 141 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2442.00	98.91	-----	-----	90.81	32.36	7.83	32.09
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2388.23	54.84	74.00	-19.16	46.91	32.25	7.76	32.08	377 141 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2442.00	98.91	-----	-----	90.81	32.36	7.83	32.09	377 141 PEAK																																																																																
Avg																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.63</td><td>43.50</td><td>54.00</td><td>-10.50</td><td>35.56</td><td>32.26</td><td>7.76</td><td>32.08</td><td>377 141 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.63	43.50	54.00	-10.50	35.56	32.26	7.76	32.08	377 141 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2442.00</td><td>90.60</td><td>-----</td><td>-----</td><td>82.48</td><td>32.37</td><td>7.84</td><td>32.09</td><td>377 141 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2442.00	90.60	-----	-----	82.48	32.37	7.84	32.09
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2389.63	43.50	54.00	-10.50	35.56	32.26	7.76	32.08	377 141 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2442.00	90.60	-----	-----	82.48	32.37	7.84	32.09	377 141 AVERAGE																																																																																