

TEST RESULT SUMMARY

FCC PART 15 SUBPART C

Section 15.209

MANUFACTURER'S NAME	Medtronic Neurological
NAME OF EQUIPMENT	Trilogy Patient Programmer
TYPE OF EQUIPMENT	Battery-powered, hand-held programmer
MODEL NUMBER	7439
MANUFACTURER'S ADDRESS	800 53 rd Avenue NE Columbia Heights, MN 55421
TEST REPORT NUMBER	WC402657.1 Rev B
TEST DATE	15 June 2004

According to testing performed at TÜV Product Service Inc, the above-mentioned unit is in compliance with the electromagnetic compatibility requirements defined in FCC Part 15 Subpart C, Section 15.209.

It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics. Any modifications necessary for compliance made during testing on the above mentioned date(s) must be implemented in all production units for compliance to be maintained.

TÜV Product Service Inc, as an independent testing laboratory, declares that the equipment tested as specified above conforms to the requirements of FCC Part 15 Subpart C, Section 15.209.

Date: 21 April 2005

Location: Taylors Falls MN
USA



R. M. Johnson
Tested By



T. K. Swanson
Reviewed By

EMC EMISSION - TEST REPORT

Test Report File No. : **WC402657.1** Date of issue: 21 April 2005
Rev B

Model No. : **7439**

Product Name : **Trilogy Patient Programmer**

Product Type : **Battery-powered, hand-held programmer**

Applicant : **Medtronic Neurological**

Manufacturer : **Medtronic Neurological**

License holder : **Medtronic Neurological**

Address : **800 53rd Avenue NE**

: **Columbia Heights, MN 55421**

Test Result : ☒ **Positive** ☐ **Negative**

Test Project Number :
Reference(s) **WC402657.1**
Rev B

Total pages including
Appendices **29**

TÜV Product Service Inc is a subcontractor to TÜV Product Service, GmbH according to the principles outlined in ISO/IEC Guide 25 and EN 45001.


TÜV Product Service Inc reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. TÜV Product Service Inc shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV Product Service Inc issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval. This report shall not be used by the client to claim product endorsement by NVLAP or any agency of the US government.

TÜV Product Service Inc and its professional staff hold government and professional organization certifications and are members of AAMI, ACIL, AEA, ANSI, IEEE, NVLAP, and VCCI

REVISION RECORD

REVISION	TOTAL NUMBER OF PAGES	DATE	DESCRIPTION
	28	20 July 2004	Initial Release
A	29	18 April 2005	Revisions include: <ul style="list-style-type: none">▪ Changed Minimum limit margin for fundamental on page 10 to 85 dB. Also changed falloff to 60 dB/decade.
B	29	21 April 2005	Revisions include: <ul style="list-style-type: none">▪ Added peak measurement data to page A3 and added comment regarding peak measurements to page 10.▪ Replaced photo on page 13.

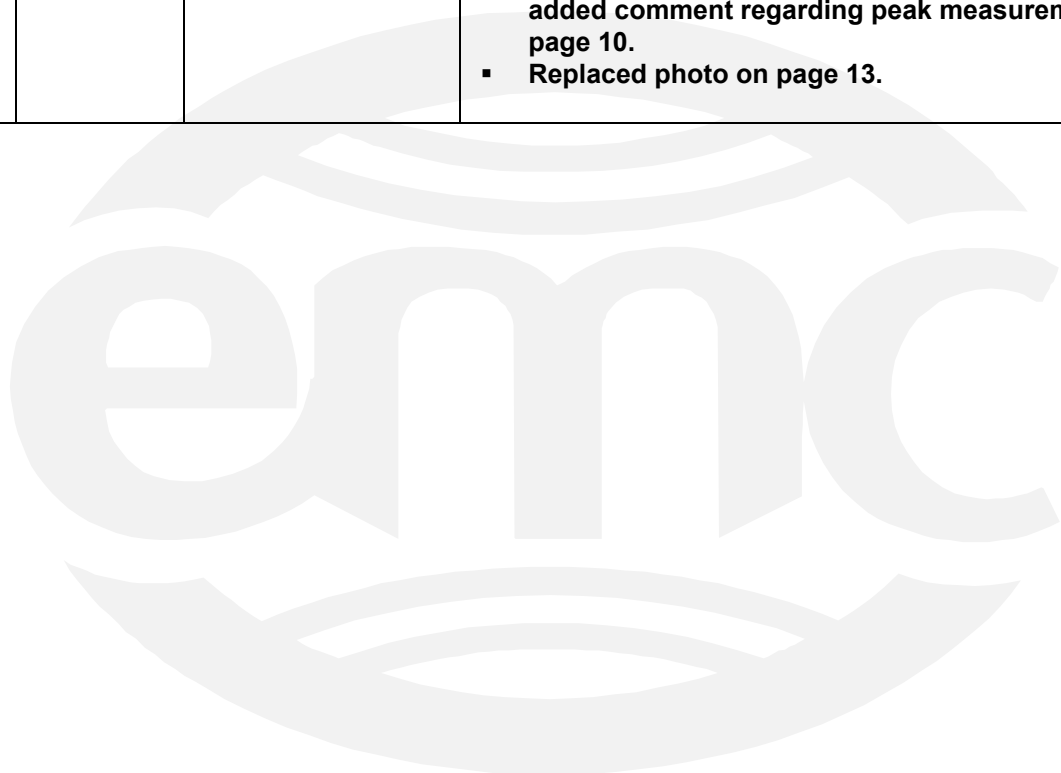

D I R E C T O R Y - E M I S S I O N S

	Page(s)
A) Documentation	
Test report	<u>1 - 11</u>
Revision Record	<u>2</u>
Directory	<u>3</u>
Test Regulations	<u>4</u>
Deviation from standard / Summary	<u>11</u>
Test-setups (Photos)	<u>12 - 13</u>
Test-setup (drawing)	<u>Appendix A</u>
B) Test data	
FCC 15.207 - Conducted emissions	10/150 kHz - 30 MHz <u>6, 10</u>
FCC 15.209 - Radiated emissions	10 kHz - 30 MHz <u>6, 10</u>
FCC 15.209 - Radiated emissions	30 MHz - 1000 MHz <u>7, 10</u>
Interference power	30 MHz - 300 MHz <u>N/A</u>
Equivalent Radiated emissions	1 GHz - 18 GHz <u>N/A</u>
C) Appendix A	
Test Data Sheets and Test Setup Drawing(s)	<u>A2 – A7</u>
D) Appendix B	
Constructional Data Form	<u>B2 – B7</u>
Product Information Form(s)	<u>N/A</u>
E) Appendix C	
Measurement Protocol	<u>C1 - C2</u>

EMISSIONS TEST REGULATIONS :

The emissions tests were performed according to following regulations:

- | | | |
|---|---|------------------------------------|
| <input type="checkbox"/> - EN 50081-1 / 1991 | <input type="checkbox"/> - Group 1 | <input type="checkbox"/> - Group 2 |
| <input type="checkbox"/> - EN 55011 / 1991 | <input type="checkbox"/> - Class A | <input type="checkbox"/> - Class B |
| <input type="checkbox"/> - EN 55013 / 1990 | <input type="checkbox"/> - Household appliances and similar | |
| <input type="checkbox"/> - EN 55014 / 1987 | <input type="checkbox"/> - Portable tools | |
| | <input type="checkbox"/> - Semiconductor devices | |
| <input type="checkbox"/> - EN 55014 / A2:1990 | <input type="checkbox"/> - Household appliances and similar | |
| <input type="checkbox"/> - EN 55014 / 1993 | <input type="checkbox"/> - Portable tools | |
| | <input type="checkbox"/> - Semiconductor devices | |
| <input type="checkbox"/> - EN 55015 / 1987 | | |
| <input type="checkbox"/> - EN 55015 / A1:1990 | | |
| <input type="checkbox"/> - EN 55015 / 1993 | | |
| <input type="checkbox"/> - EN 55022 / 1987 | <input type="checkbox"/> - Class A | <input type="checkbox"/> - Class B |
| <input type="checkbox"/> - EN 55022 / 1994 | <input type="checkbox"/> - Class A | <input type="checkbox"/> - Class B |
| <input type="checkbox"/> - BS | | |
| <input type="checkbox"/> - VCCI | <input type="checkbox"/> - Class A | <input type="checkbox"/> - Class B |
| <input checked="" type="checkbox"/> - FCC Part 15 Subpart C Section 15.209 | | |
| <input type="checkbox"/> - FCC Part 15 Subpart C Section 15.207 Conducted Emission Requirements | <input type="checkbox"/> - Class A | <input type="checkbox"/> - Class B |
| <input type="checkbox"/> - FCC Part 15 Subpart B | | |
| <input type="checkbox"/> - CISPR 11 (1990) | <input type="checkbox"/> - Group 1 | <input type="checkbox"/> - Group 2 |
| | <input type="checkbox"/> - Class A | <input type="checkbox"/> - Class B |
| <input type="checkbox"/> - CISPR 22 (1993) | <input type="checkbox"/> - Class A | <input type="checkbox"/> - Class B |

Environmental conditions in the lab:

	<u>Actual</u>
Temperature	: 20 °C
Relative Humidity	: 40 %
Atmospheric pressure	: 97.0 kPa
Power supply system	: 3 VDC Battery

Sign Explanations:

- ☐ - not applicable
☒ - applicable



Emissions Test Conditions: CONDUCTED EMISSIONS [FCC 15.207]

The *CONDUCTED EMISSIONS (INTERFERENCE VOLTAGE)* measurements were performed at the following test location:

☒ - Test not applicable

- ☐ - Wild River Lab Large Test Site (Open Area Test Site)
- ☐ - Wild River Lab Small Test Site (Open Area Test Site)
- ☐ - Oakwood Lab (Open Area Test Site)
- ☐ - Wild River Lab Screen Room
- ☐ - New Brighton Lab Shielded Room

Emissions Test Conditions: RADIATED EMISSIONS (FCC 15.209 10 kHz - 30 MHz)

The *RADIATED EMISSIONS (MAGNETIC FIELD)* measurements were performed at the following test location:

☐ - Test not applicable

- ☐ - Wild River Lab Large Test Site (Open Area Test Site)
- ☒ - Wild River Lab Small Test Site (Open Area Test Site)
- ☐ - Oakwood Lab (Open Area Test Site)

at a test distance of :

- ☐ - 0.3 meters
- ☒ - 1 meter
- ☒ - 3 meter
- ☒ - 10 meters
- ☒ - 30 meters

Test equipment used :

	TUV ID	Model Number	Manufacturer	Description	Serial Number	Cal Due
■ -	2534	ESHS-20	Rhode & Schwarz	EMI Receiver	837055/003	1-14-05
■ -	2517	HFH2-Z2	Polorad	Loop Antenna	879285/036	4-27-05

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST) and is calibrated annually.

Emissions Test Conditions: RADIATED EMISSIONS (FCC 15.209 Electric Field 30 - 1000 MHz)

The **RADIATED EMISSIONS (ELECTRIC FIELD)** measurements, in the frequency range of 30 MHz-1000 MHz, were tested in a horizontal and vertical polarization at the following test location:

☐ - Test not applicable

- ☐ - Wild River Lab Large Test Site (Open Area Test Site)
- ☒ - Wild River Lab Small Test Site (Open Area Test Site) – NSA measurements made 2-03, due 2-05.
- ☐ - Oakwood Lab (Open Area Test Site)

at a test distance of :

- ☒ - 3 meters
- ☐ - 10 meters
- ☐ - 30 meters

Test equipment used :

	TUV ID	Model Number	Manufacturer	Description	Serial Number	Cal Due
■ -	3203	EM-6917B	Electro-Metrics	Biconicalog Periodic	106	3-30-05
■ -	2690	8566B	Hewlett-Packard	Spectrum Analyzer (Unit F)	2430A00930	1-28-05
■ -	2673	85662A	Hewlett-Packard	Analyzer Display (Unit A)	2152A03687	1-28-05
■	2681	85650A	Hewlett-Packard	Quasi-Peak Adapter	2430A00562	2-23-05
■ -	2671	8447D	Electro-Mechanics (EMCO)	Preamplifier	2648A04942	Code B

Cal Code B = Calibration verification performed internally.

Cal Code Y = Calibration not required when used with other calibrated equipment.

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST) and is calibrated annually.

Emissions Test Conditions: INTERFERENCE POWER

The **INTERFERENCE POWER** measurements were performed by using the absorbing clamp on the mains and interface cables in the frequency range 30 MHz - 300 MHz at the following test location:

☒ - Test not applicable

- ☐ - Wild River Lab Large Test Site (Open Area Test Site)
- ☐ - Wild River Lab Small Test Site (Open Area Test Site)
- ☐ - Oakwood Lab (Open Area Test Site)
- ☐ - Wild River Lab Screen Room
- ☐ - New Brighton Lab Shielded Room

Emissions Test Conditions: RADIATED EMISSIONS Electric Field 1 to 100 GHz

The *EQUIVALENT RADIATED EMISSIONS* measurements in the frequency range 1 GHz - 100 GHz were performed in a horizontal and vertical polarization at the following test location:

☒ - Test not applicable

- ☐ - Wild River Lab Large Test Site (Open Area Test Site)
- ☐ - Wild River Lab Small Test Site (Open Area Test Site)
- ☐ - Oakwood Lab (Open Area Test Site)
- ☐ - Wild River Lab Screen Room

at a test distance of:

- ☐ - 1 meters
- ☐ - 3 meters
- ☐ - 10 meters



Equipment Under Test (EUT) Test Operation Mode - Emission tests :

The device under test was operated under the following conditions during emissions testing:

- ☐ - Standby
- ☐ - Test program (H - Pattern)
- ☐ - Test program (color bar)
- ☐ - Test program (customer specific)
- ☐ - Practice operation
- ☐ - Normal Operating Mode
- ☒ - RF telemetry

Configuration of the device under test:

- ☒ - See Constructional Data Form in Appendix B - Page B2
- ☐ - See Product Information Form in Appendix B - beginning on Page B3

The following peripheral devices and interface cables were connected during the measurement:

- | | |
|---|----------------|
| <input type="checkbox"/> - _____ | Type : _____ |
| <input type="checkbox"/> - _____ | Type : _____ |
| <input type="checkbox"/> - _____ | Type : _____ |
| <input type="checkbox"/> - _____ | Type : _____ |
| <input type="checkbox"/> - _____ | Type : _____ |
| <input type="checkbox"/> - unshielded power cable | |
| <input type="checkbox"/> - unshielded cables | |
| <input type="checkbox"/> - shielded cables | MPS.No.: _____ |
| <input type="checkbox"/> - customer specific cables | |
| <input type="checkbox"/> - _____ | |
| <input type="checkbox"/> - _____ | |

Emission Test Results:

FCC 15.207 - Conducted emissions 450 kHz - 30 MHz

The requirements are ☐ - MET ☐ - NOT MET ☐ - N/A

Minimum margin of compliance _____ dB at _____ kHz

Maximum margin of non-compliance _____ dB at _____ MHz

Remarks: _____

FCC 15.209 - Radiated emissions (magnetic field) 10 kHz - 30 MHz

The requirements are ☒ - MET ☐ - NOT MET

Minimum limit margin for fundamental _____ 85 dB at _____ 175.0 kHz

Minimum limit margin for spurious/harmonics _____ >10 dB at _____ MHz

Remarks: The fundamental was measured to be 87 dBuV/m in Average mode at 1 meter and 57 dBuV/m (707.9 microvolts/meter) at 3 meters. This extrapolates to a level of -63 dBuV/m (0.00071 microvolts/meter) at 300 meters using 60 dB/decade as indicated by testing. The limit is 22.7 dBuV/m (13.7 microvolts/meter) at 300 meters.

Peak level is less than 20 dB above the average limit as required.

No spurious emissions or other harmonics were detected.

FCC 15.209 - Radiated emissions (electric field) 30 MHz - 1000 MHz

The requirements are ☒ - MET ☐ - NOT MET

Minimum margin of compliance _____ 14 dB at _____ 219.5 MHz

Minimum limit margin for spurious _____ dB at _____ MHz

Remarks: _____

Interference Power at the mains and interface cables 30 MHz - 300 MHz

The requirements are ☐ - MET ☐ - NOT MET ☐ - N/A

Remarks: _____

Equivalent Radiated emissions 1 GHz - 100 GHz

The requirements are ☐ - MET ☐ - NOT MET ☐ - N/A

Remarks: _____

DEVIATIONS FROM STANDARD:

None.

GENERAL REMARKS:

The radiated measurements from 10 kHz to 30 MHz are made in quasi-peak detection, except for the levels noted between 110-490 kHz, which are made in average detection.

SUMMARY:

The requirements according to the technical regulations are

■ - met

□ - **not** met.

The device under test does


■ - fulfill the general approval requirements mentioned on page 3.

□ - **not** fulfill the general approval requirements mentioned on page 3.

Testing Start Date: 15 June 2004

Testing End Date: 15 June 2004

- TÜV PRODUCT SERVICE INC -



T. K. Swanson
Reviewed By



Tested By:
R. M. Johnson

Test-setup photo(s):
Conducted emission 450 kHz - 30 MHz

Not Applicable



Test-setup photo(s):
Radiated emission 10 kHz - 1000 MHz




Appendix A

Test Data Sheets
and
Test Setup Drawing(s)



TEST SETUP FOR EMISSIONS TESTING

WILD RIVER LAB
Small Test Site (STS)

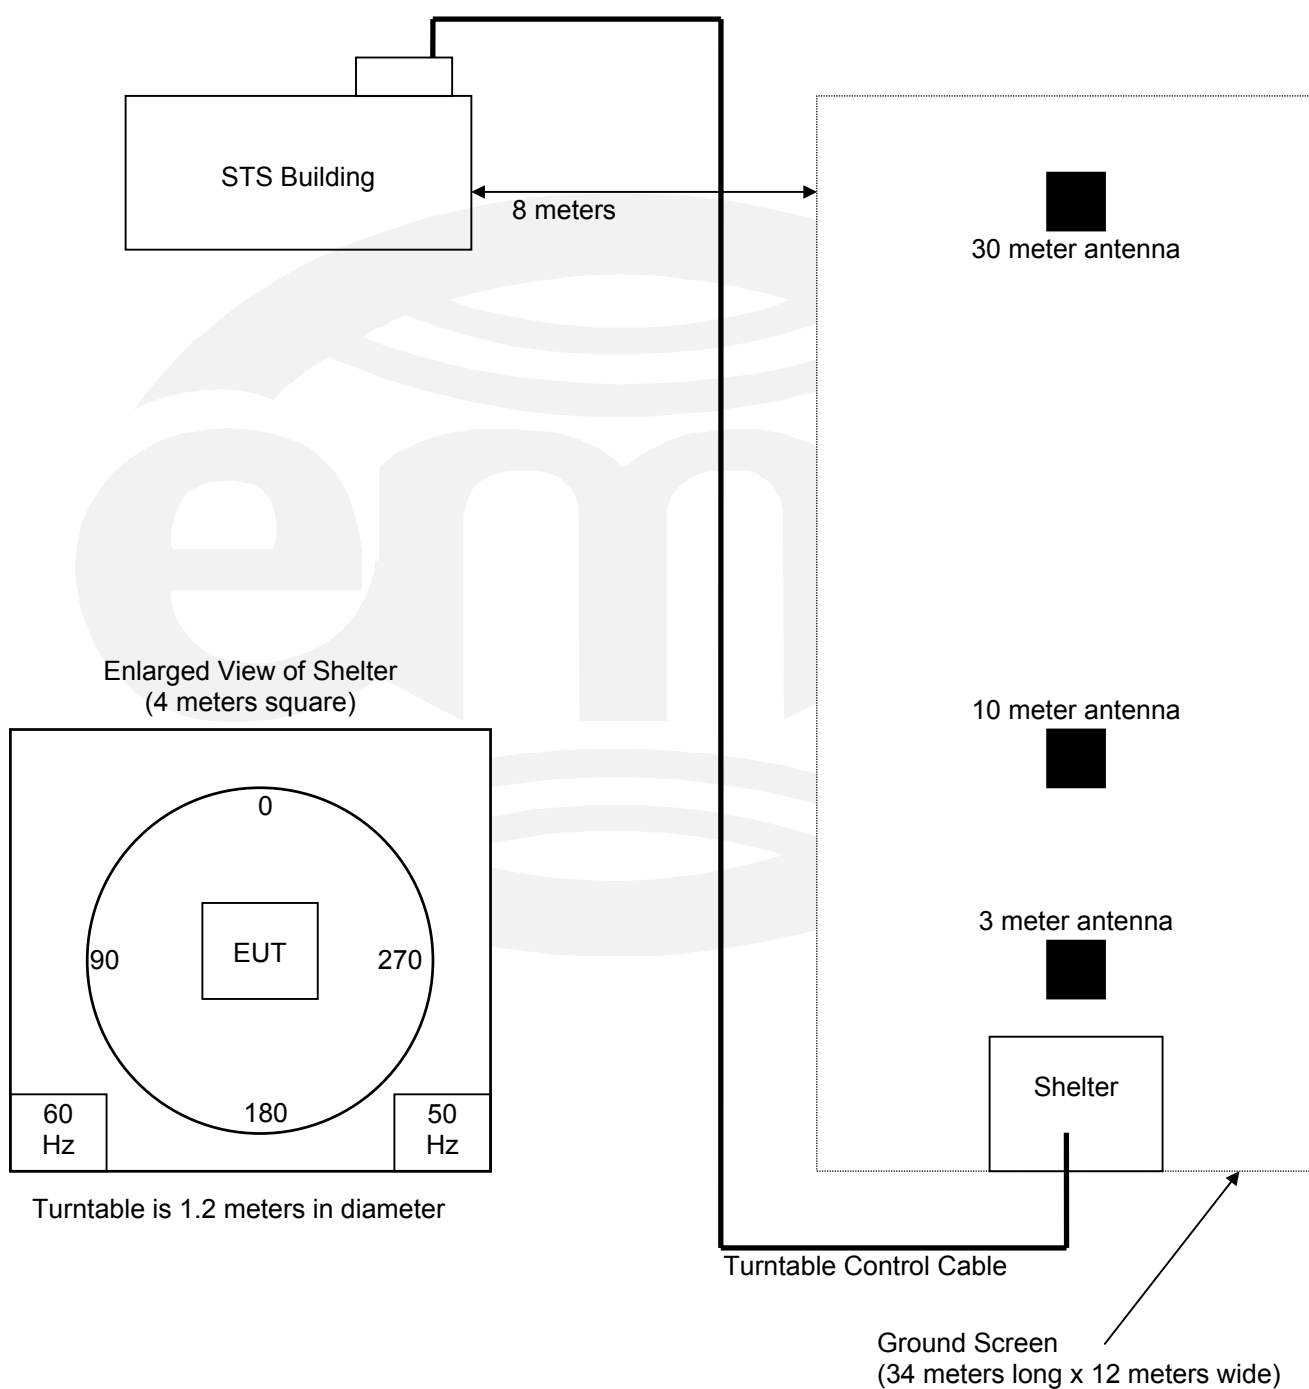

FCC Part 15.209 Radiated Emissions									
Test Report # WC402657.1				Test Date: 15-Jun-04					
Company: Medtronic									
EUT: Model 7439 Trilogy									
	dBuV/m	dBuV/m	dBuV/m	dBuV/m	dBuV/m	dBuV/m	dBuV/m	dBuV/m	margin
MHz	0.3 m	1 m	3 m	10 m	30 m	30 m Limit	300 m	300 m Limit	dB
0.009								48.5193746	48.51937
0.175		87	57	27	-3	N/A	-63	22.7434639	85.74346
0.49						53.8003			
0.49						33.8003			
1.705						22.96974			
1.705						29.54243			
30						29.54243			
Levels at 1 and 3 meters are measured AVERAGE values - other levels are extrapolated using falloff of 60 dB per decade as indicated by 1 and 3 meter measurements.									
PEAK reading at .175 MHz is 95 dBuV/m at 1 M and 65 dBuV/m at 3 M.									
This extrapolates to -55 dBuV/m at 300 M or 77dB under the average limit.									

RADIATED EMISSIONS



Test Report #: WC402657 Run 4 Test Area: STS

EUT Model #: 7439 Date: 6/15/04

EUT Serial #: NJD000419P EUT Power: 3 VDC -BATTERY Temperature: 20.0 °C

Test Method: FCC B Air Pressure: 97.0 kPa

Customer: MEDTRONIC Rel. Humidity: 40.0 %

EUT Description: PATIENT PROGRAMMER , TRILLOGY APPLICATION

Notes: TELEMETRY ACTIVE

Data File Name: 2657.dat

Page: 1 of 4

List of measurements for run #: 4

FREQ	LEVEL (dBuV)	CABLE / ANT / PREAMP / ATTEN (dB)	FINAL (dBuV / m)	POL / HGT / AZ (m)(DEG)	DELTA1 FCC-B <1GHz 3m	DELTA2
109.182 MHz	34.1 Qp	1.53 / 9.58 / 26.83 / 0.0	18.38	V / 1.00 / 0	-25.12	n/a
113.627 MHz	28.95 Qp	1.58 / 9.6 / 26.88 / 0.0	13.25	V / 1.00 / 0	-30.25	n/a
125.013 MHz	30.95 Qp	1.64 / 8.81 / 26.88 / 0.0	14.53	V / 1.00 / 0	-28.97	n/a
126.704 MHz	31.85 Qp	1.68 / 8.63 / 26.86 / 0.0	15.3	V / 1.00 / 0	-28.2	n/a
127.969 MHz	30.75 Qp	1.71 / 8.52 / 26.85 / 0.0	14.13	V / 1.00 / 0	-29.37	n/a
134.803 MHz	34.4 Qp	1.77 / 8.29 / 26.8 / 0.0	17.66	V / 1.00 / 0	-25.84	n/a
219.581 MHz	33.15 Qp	2.2 / 10.75 / 26.93 / 0.0	19.17	V / 1.00 / 0	-26.83	n/a
230.127 MHz	35.1 Qp	2.2 / 10.92 / 27.0 / 0.0	21.22	V / 1.00 / 0	-24.78	n/a
219.581 MHz	36.55 Qp	2.2 / 10.75 / 26.93 / 0.0	22.57	V / 1.00 / 90	-23.43	n/a
109.182 MHz	34.9 Qp	1.53 / 9.58 / 26.83 / 0.0	19.18	V / 1.00 / 180	-24.32	n/a
113.627 MHz	29.35 Qp	1.58 / 9.6 / 26.88 / 0.0	13.65	V / 1.00 / 180	-29.85	n/a
125.013 MHz	34.45 Qp	1.64 / 8.81 / 26.88 / 0.0	18.03	V / 1.00 / 180	-25.47	n/a
126.704 MHz	30.85 Qp	1.68 / 8.63 / 26.86 / 0.0	14.3	V / 1.00 / 180	-29.2	n/a
127.969 MHz	33.35 Qp	1.71 / 8.52 / 26.85 / 0.0	16.73	V / 1.00 / 180	-26.77	n/a
230.127 MHz	39.2 Qp	2.2 / 10.92 / 27.0 / 0.0	25.32	V / 1.00 / 270	-20.68	n/a
219.581 MHz	40.3 Qp	2.2 / 10.75 / 26.93 / 0.0	26.32	V / 1.00 / 270	-19.68	n/a
109.182 MHz	37.25 Qp	1.53 / 9.58 / 26.83 / 0.0	21.53	V / 3.00 / 180	-21.97	n/a
113.627 MHz	31.6 Qp	1.58 / 9.6 / 26.88 / 0.0	15.9	V / 3.00 / 180	-27.6	n/a
126.704 MHz	33.2 Qp	1.68 / 8.63 / 26.86 / 0.0	16.65	V / 3.00 / 180	-26.85	n/a
127.969 MHz	33.85 Qp	1.71 / 8.52 / 26.85 / 0.0	17.23	V / 3.00 / 180	-26.27	n/a

Tested by: RMJ

Printed

Signature

Reviewed by: TKS

Printed

Signature

RADIATED EMISSIONS



Test Report #: WC402657 Run 4 Test Area: STS

EUT Model #: 7439 Date: 6/15/04

EUT Serial #: NJD000419P EUT Power: 3 VDC -BATTERY Temperature: 20.0 °C

Test Method: FCC B Air Pressure: 97.0 kPa

Customer: MEDTRONIC Rel. Humidity: 40.0 %

EUT Description: PATIENT PROGRAMMER , TRILLOGY APPLICATION

Notes: TELEMETRY ACTIVE

Data File Name: 2657.dat

Page: 2 of 4

List of measurements for run #: 4

FREQ	LEVEL (dBuV)	CABLE / ANT / PREAMP / ATTEN (dB)	FINAL (dBuV / m)	POL / HGT / AZ (m)(DEG)	DELTA1 FCC-B <1GHz 3m	DELTA2
MAXIMIZED.						
219.581 MHz	39.99 Qp	2.2 / 10.75 / 26.93 / 0.0	26.01	V / 1.00 / 275	-19.99	n/a
109.182 MHz	39.75 Qp	1.53 / 9.58 / 26.83 / 0.0	24.03	H / 1.00 / 90	-19.47	n/a
113.627 MHz	33.25 Qp	1.58 / 9.6 / 26.88 / 0.0	17.55	H / 1.00 / 90	-25.95	n/a
125.013 MHz	35.4 Qp	1.64 / 8.81 / 26.88 / 0.0	18.98	H / 1.00 / 90	-24.52	n/a
126.704 MHz	36.4 Qp	1.68 / 8.63 / 26.86 / 0.0	19.85	H / 1.00 / 90	-23.65	n/a
127.969 MHz	34.8 Qp	1.71 / 8.52 / 26.85 / 0.0	18.18	H / 1.00 / 90	-25.32	n/a
134.803 MHz	35.45 Qp	1.77 / 8.29 / 26.8 / 0.0	18.71	H / 1.00 / 90	-24.79	n/a
219.581 MHz	44.2 Qp	2.2 / 10.75 / 26.93 / 0.0	30.22	H / 1.00 / 180	-15.78	n/a
230.127 MHz	43.8 Qp	2.2 / 10.92 / 27.0 / 0.0	29.92	H / 1.00 / 180	-16.08	n/a
109.182 MHz	42.4 Qp	1.53 / 9.58 / 26.83 / 0.0	26.68	H / 3.00 / 270	-16.82	n/a
113.627 MHz	35.75 Qp	1.58 / 9.6 / 26.88 / 0.0	20.05	H / 3.00 / 270	-23.45	n/a
125.013 MHz	37.25 Qp	1.64 / 8.81 / 26.88 / 0.0	20.83	H / 3.00 / 270	-22.67	n/a
126.704 MHz	37.95 Qp	1.68 / 8.63 / 26.86 / 0.0	21.4	H / 3.00 / 270	-22.1	n/a
127.969 MHz	36.25 Qp	1.71 / 8.52 / 26.85 / 0.0	19.63	H / 3.00 / 270	-23.87	n/a
134.803 MHz	36.15 Qp	1.77 / 8.29 / 26.8 / 0.0	19.41	H / 3.00 / 270	-24.09	n/a
219.581 MHz	36.05 Qp	2.2 / 10.75 / 26.93 / 0.0	22.07	H / 3.00 / 270	-23.93	n/a
MAXIMIZED.						
219.581 MHz	45.45 Qp	2.2 / 10.75 / 26.93 / 0.0	31.47	H / 1.00 / 226	-14.53	n/a
MAXED ANTENNA AND ROTATED EUT 360 DEGREES.						
END OF SCAN 30 - 1000MHz.						

Tested by: RMJ

Printed

Signature

Reviewed by: TKS

Printed

Signature

RADIATED EMISSIONS



Test Report #: WC402657 Run 4 Test Area: STS
EUT Model #: 7439 Date: 6/15/04
EUT Serial #: NJD000419P EUT Power: 3 VDC -BATTERY Temperature: 20.0 °C
Test Method: FCC B Air Pressure: 97.0 kPa
Customer: MEDTRONIC Rel. Humidity: 40.0 %

EUT Description: PATIENT PROGRAMMER , TRILLOGY APPLICATION

Notes: TELEMETRY ACTIVE

Data File Name: 2657.dat

Page: 3 of 4

Measurement summary for limit1: FCC-B <1GHz 3m (Qp)

FREQ	LEVEL (dBuV)	CABLE / ANT / PREAMP / ATTEN (dB)	FINAL (dBuV / m)	POL / HGT / AZ (m)(DEG)	DELTA1 FCC-B <1GHz 3m
219.581 MHz	45.45 Qp	2.2 / 10.75 / 26.93 / 0.0	31.47	H / 1.00 / 226	-14.53
230.127 MHz	43.8 Qp	2.2 / 10.92 / 27.0 / 0.0	29.92	H / 1.00 / 180	-16.08
109.182 MHz	42.4 Qp	1.53 / 9.58 / 26.83 / 0.0	26.68	H / 3.00 / 270	-16.82
126.704 MHz	37.95 Qp	1.68 / 8.63 / 26.86 / 0.0	21.4	H / 3.00 / 270	-22.1
125.013 MHz	37.25 Qp	1.64 / 8.81 / 26.88 / 0.0	20.83	H / 3.00 / 270	-22.67
113.627 MHz	35.75 Qp	1.58 / 9.6 / 26.88 / 0.0	20.05	H / 3.00 / 270	-23.45
127.969 MHz	36.25 Qp	1.71 / 8.52 / 26.85 / 0.0	19.63	H / 3.00 / 270	-23.87
134.803 MHz	36.15 Qp	1.77 / 8.29 / 26.8 / 0.0	19.41	H / 3.00 / 270	-24.09

Tested by: RMJ

Printed

Signature

Reviewed by: TKS


Printed

Signature

TÜV
PRODUCT SERVICE

Test Report #:	WC402657 Run 4	Test Area:	STS	
EUT Model #:	7439	Date:	6/15/04	
EUT Serial #:	NJD000419P	EUT Power:	3 VDC -BATTERY	Temperature: 20.0 °C
Test Method:	FCC B			Air Pressure: 97.0 kPa
Customer:	MEDTRONIC			Rel. Humidity: 40.0 %
UT Description:	PATIENT PROGRAMMER , TRILLOGY APPLICATION			
Notes:	TELEMETRY ACTIVE			
Data File Name:	2657.dat		Page:	4 of 4

Graph:

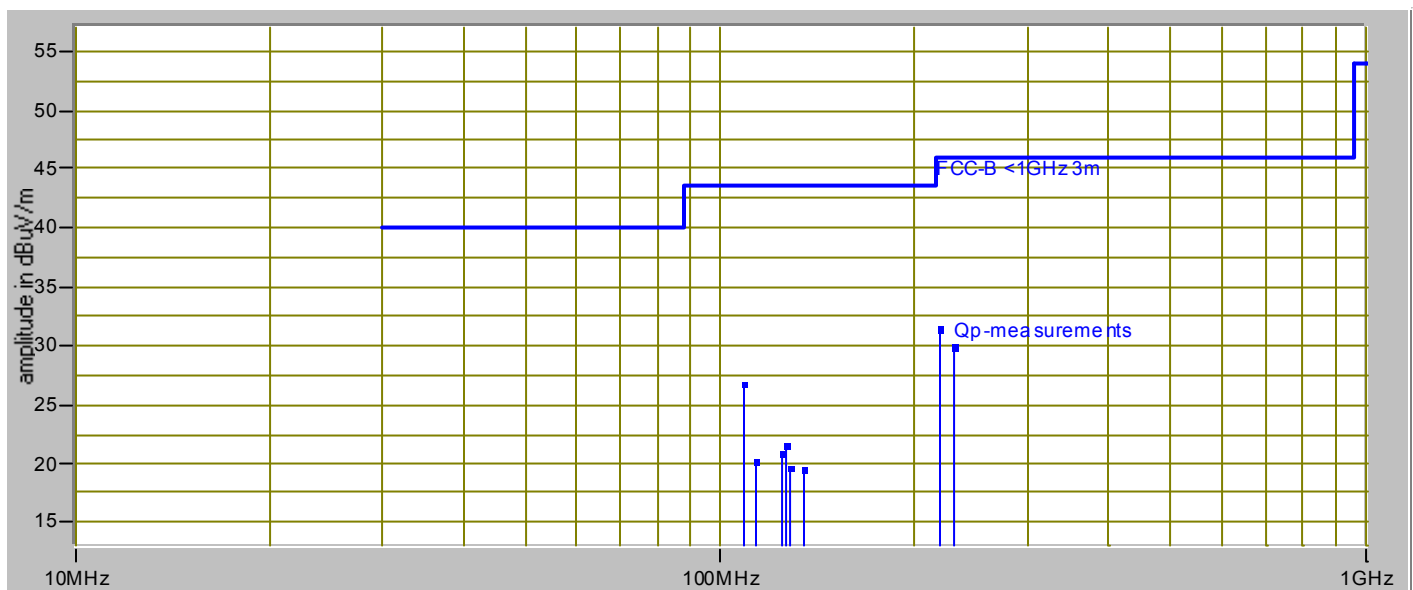

Tested by: RMJ

Printed

Signature

Reviewed TKS

by:

Printed

Signature

Appendix B

Constructional Data Form

and/or

Product Information Form(s)



EMC Test Plan and Constructional Data Form

PLEASE COMPLETE THIS DOCUMENT IN FULL, ENTERING N/A IF THE FIELD IS NOT APPLICABLE.

Applicant -- NOTE: This information will be input into your test report as shown below.
Press the F1 key at any time to get HELP for the current field selected.

Company: Medtronic Neurological
 Address: 800 53rd Avenue NE
Columbia Heights, MN 55421

Contact: Debbie Gorski Position: Design Assurance Engineer
763-514-7489 Fax: 763-514-5612
 Phone: debbie.gorski@medtronic.com
 E-mail Address: _____

General Equipment Description -- NOTE: This information will be input into your test report as shown below.

EUT Description Battery-powered, hand-held programmer
 EUT Name Trilogy Patient Programmer
 Model No.: 7439 Serial No.: _____
 Product Options: External antenna (model 37092)
 Configurations to be tested: 7439 and 37092 (patient programmer and external antenna)

Test Objective

- | | |
|--|---|
| <input type="checkbox"/> EMC Directive 89/336/EEC (EMC) | <input checked="" type="checkbox"/> FCC: Class <input type="checkbox"/> A <input checked="" type="checkbox"/> B Part 15,C |
| Std: _____ | <input type="checkbox"/> VCCI: Class <input type="checkbox"/> A <input type="checkbox"/> B |
| <input type="checkbox"/> Machinery Directive 89/392/EEC (EMC) | <input type="checkbox"/> BCIC: Class <input type="checkbox"/> A <input type="checkbox"/> B |
| Std: _____ | <input type="checkbox"/> Canada: Class <input type="checkbox"/> A <input type="checkbox"/> B |
| <input checked="" type="checkbox"/> Active Implantable Medical Device Directive 90/385/EEC (EMC) | <input type="checkbox"/> Australia: Class <input type="checkbox"/> A <input type="checkbox"/> B |
| Std: <u>See attachment</u> | <input type="checkbox"/> Other: _____ |
| <input type="checkbox"/> Vehicle Directive 72/245/EEC (EMC) | |
| Std: _____ | |
| <input type="checkbox"/> FDA Reviewers Guidance for Premarket Notification Submissions (EMC) | |

TÜV Product Service Certification Requested

- | | |
|---|---|
| <input checked="" type="checkbox"/> Attestation of Conformity (AoC) | <input type="checkbox"/> International EMC Mark (IEM) |
| <input type="checkbox"/> Certificate of Conformity (CoC) | <input checked="" type="checkbox"/> Compliance Document |
| Protection Class (N/A for vehicles) | <input type="checkbox"/> Class I <input type="checkbox"/> Class II <input type="checkbox"/> Class III |

Form

EMC Test Plan and Constructional Data Form



(Press **F1** when field is selected to show additional information on Protection Class.)

Attendance

Test will be: ☒ Attended by the customer ☐ Unattended by the customer

Failure - Complete this section if testing will not be attended by the customer.

If a failure occurs, TÜV Product Service should:

- ☐ Call contact listed above, if not available then stop testing. (After hrs phone): _____
- ☐ Continue testing to complete test series.
- ☐ Continue testing to define corrective action.
- ☐ Stop testing.

EUT Specifications and Requirements

Length: _____ Width: _____ Height: _____ Weight: _____

Power Requirements

Regulations require testing to be performed at typical power ratings in the countries of intended use. (i.e., European power is typically 230 VAC 50 Hz or 400 VAC 50 Hz, single and three phase, respectively)

Voltage: 3.0Vdc (If battery powered, make sure battery life is sufficient to complete testing.)
(2 AAA alkaline batteries)

of Phases: _____

Current (Amps/phase(max)): _____ Current (Amps/phase(nominal)): _____

Other: _____

Other Special Requirements

Typical Installation and/or Operating Environment

(ie. Hospital, Small Business, Industrial/Factory, etc.)

Operating environment can be residential, business and hospital/Doctor's office.

EUT Power Cable

☐ Permanent OR ☐ Removable Length (in meters): _____
☐ Shielded OR ☐ Unshielded
☒ Not Applicable

EMC Test Plan and Constructional Data Form

EUT Interface Ports and Cables												
Interface			Shielding									
Type	Analog	Digital	Qty	Yes	No	Type	Termination	Connector Type	Port Termination	Length (in meters)	Removable	Permanent
EXAMPLE:												
RS232	<input type="checkbox"/>	<input checked="" type="checkbox"/>	2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Foil over braid	Coaxial	Metallized 9-pin D-Sub	Characteristic Impedance	6	<input checked="" type="checkbox"/>	<input type="checkbox"/>
External antenna	<input checked="" type="checkbox"/>	<input type="checkbox"/>	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	N/A	Stranded	2.5mm, 4 position moldable plug	Solder	3	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>

EMC Test Plan and Constructional Data Form

EUT Software.

Revision Level: Version 2.1.0

Description: **EMC Telemetry Test Menu [PEMTST-0110]**

Telemetry test menu uses the Stim On/Off keys to select the menu item.
 Transmit alternating Trilogy Stim on/off commands
 The Sync key on the patient programmer or the audio key on the recharger to select the highlighted item.

The telemetry test menu will provide the following:

- Transmit alternating Restore Stim on/off commands
- Transmit alternating Trilogy Stim on/off commands

Screen will display "Running" and count the number of successful transactions occurred while test is active.

Screen will display "Stopped" if telemetry is tried and failed 3 times. The success counter will display and hold the last successful transaction.

Pressing any key from the "Stopped" state will return to the telemetry test menu.

Command:
 < 10 06 >< 30 01 AC 01 00 00 >< cc cc >

Responses:
 [< 10 03 >< 31 01 09 >< cc cc >] = Success
 [< 10 04 >< 31 02 rr ss >< cc cc >] = Failure,
 rr = reason
 ss = sub-reason

EUT Operating Modes to be Tested -- list the operating modes to be used during test. It is recommended the equipment be tested while operating in a typical operation mode. FCC testing of personal computers and/or peripherals requires that a simple program generate a complete line of upper case H's. Provide a general description of all software, firmware, and PLD algorithms used in the equipment. List all code modules as described above, with the revision level used during testing. Consult with your TÜV Product Service Representative if additional assistance is required.

1. RF telemetry (see test plan attached to RFQ)

EUT System Components -- List and describe all components which are part of the EUT. For FCC testing a minimum configuration is required. (ie. Mouse, Printer, Monitor, External Disk Drive, Motherboard, etc.)

Description	Model #	Serial #	FCC ID #
External antenna	37092		
Trilogy Patient programmer	7439	NJD000419P	LF537741

EMC Test Plan and Constructional Data Form

Support Equipment -- List and describe all support equipment which is not part of the EUT. (i.e. peripherals, simulators, etc)

<i>Description</i>	<i>Model #</i>	<i>Serial #</i>	<i>FCC ID #</i>
Neurostimulator (Restore)	37711		
Neurostimulator (Trilogy)	7479B		

Oscillator Frequencies

<i>Frequency</i>	<i>Derived Frequency</i>	<i>Component # / Location</i>	<i>Description of Use</i>
9.8304 MHz	N/A	Y2 (Digital Board: 602051 C)	uP Clock
32.768 kHz	N/A	Y3 (Digital Board: 602051 C)	Real Time Clock

Power Supply

<i>Manufacturer</i>	<i>Model #</i>	<i>Serial #</i>	<i>Type</i>
			<input type="checkbox"/> Switched-mode: (Frequency) _____ <input type="checkbox"/> Linear <input type="checkbox"/> Other: _____
			<input type="checkbox"/> Switched-mode: (Frequency) _____ <input type="checkbox"/> Linear <input type="checkbox"/> Other: _____

Power Line Filters

<i>Manufacturer</i>	<i>Model #</i>	<i>Location in EUT</i>

EMC Test Plan and Constructional Data Form

**Critical EMI Components (Capacitors, ferrites, etc.)**

<i>Description</i>	<i>Manufacturer</i>	<i>Part # or Value</i>	<i>Qty</i>	<i>Component # / Location</i>
Ferrite Bead on External Antenna (37092)	Steward	2880268	1	External Antenna Cable

EMC Critical Detail -- Describe other EMC Design details used to reduce high frequency noise.(PLEASE INSERT "**ELECTRONIC SIGNATURE**" BELOW IF POSSIBLE)**Authorization Signatures**

Customer authorization to perform tests
according to this test plan.

Date

Test Plan/CDF Prepared By (please print)

Date

Reviewed by TÜV Product Service Associate

Date

Appendix C

MEASUREMENT PROTOCOL FOR FCC

GENERAL INFORMATION

Measurement Uncertainty

The test system for conducted emissions is defined as the LISN, tuned receiver or spectrum analyzer, and coaxial cable. The test system for radiated emissions is defined as the antenna, the pre-amplifier, the spectrum analyzer and the coaxial cable. These test systems have a measurement uncertainty of ± 4.5 dB. The equipment comprising the test systems are calibrated on an annual basis.

Justification

The Equipment Under Test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral into it's characteristic impedance or left unterminated. When appropriate, the cables are manually manipulated with respect to each other to obtain maximum emissions from the unit.

CONDUCTED EMISSIONS

The final level, expressed in dB μ V, is arrived at by taking the reading directly from the EMI receiver. This level is compared directly to the FCC limit.

To convert between dB μ V and μ V, the following conversions apply:

$$\text{dB}\mu\text{V} = 20(\log \mu\text{V})$$

$$\mu\text{V} = \text{Inverse log}(\text{dB}\mu\text{V}/20)$$

RADIATED EMISSIONS

The final level, expressed in dB μ V/m, is arrived at by taking the reading from the spectrum analyzer (Level dB μ V), adding the antenna correction factor and cable loss factor (Factor dB) to it, then subtracting the preamp gain. This result then has the FCC limit subtracted from it to provide the Delta which gives the tabular data as shown in the data sheets in Attachment A.

Example:

FREQ (MHz)	LEVEL (dB μ V)	CABLE/ANT/PREAMP				FINAL	POL/HGT/AZ			DELTA1
		(dB)	(dB/m)	(dB)		(dB μ V/m)	(m)	(deg)		FCC B
60.80	42.5Qp	+	1.2	+	10.9	- 25.5 = 29.1	V	1.0	0.0 -	-10.9

DETAILS OF TEST PROCEDURES

General Standard Information

The test methods used comply with ANSI C63.4-2001 - "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz."

Conducted Emissions

Conducted emissions on the 60 Hz power interface of the EUT are measured in the frequency range of 450 kHz to 30 MHz. The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection, and a Line Impedance Stabilization Network (LISN), with 50 Ω /50 μ H (CISPR 16) characteristics. Table top equipment is placed on a non-conducting table 80 centimeters above the floor and is positioned 40 centimeters from the vertical ground plane (wall) of the screen room. In some cases, a pre-scan using a spectrum analyzer is initially performed on the units comprising the system under test to locate the highest emissions. If the minimum passing margin appears to be less than 20 dB with a peak mode measurement, the emissions are re-measured using a tuned receiver or spectrum analyzer with quasi-peak and average detection and recorded on the data sheets.

Radiated Emissions

Radiated emissions from the EUT are measured in the frequency range of 30 to 1000 MHz using a spectrum analyzer and appropriate broadband linearly polarized antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection and measurements above 1000 MHz are made with a 1 MHz/6 dB bandwidth and peak detection. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimeters above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. Interface cables that are closer than 40 centimeters to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimeters from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna is positioned 3 meters horizontally from the EUT. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 meters, measurement scans are made with both horizontal and vertical antenna polarizations and the EUT are rotated 360 degrees. Intentional radiators are rotated through three orthogonal axes to determine the attitude that maximizes the emissions.

In the frequency range of 9 kHz to 30 MHz, measurements are made with quasi-peak or average detection with a loop antenna. The antenna is positioned 1 meter above the ground plane and rotated about its vertical axis for maximum response at each azimuth about the EUT. The antenna is also positioned horizontally at the specified distances.