
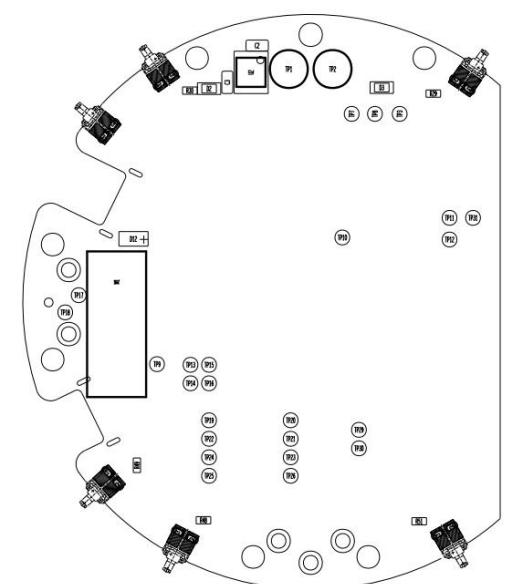
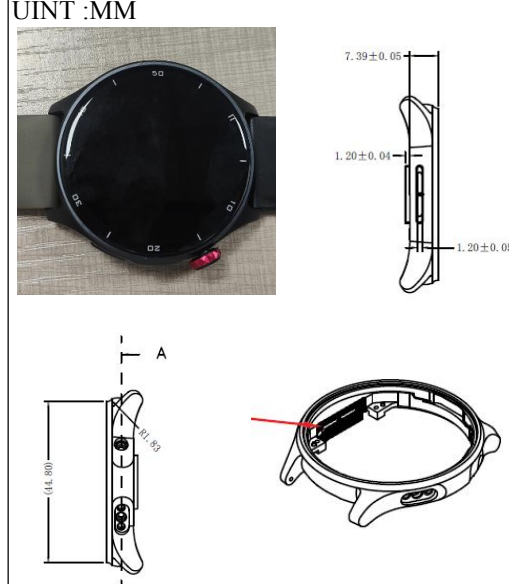


Technical Specification																																															
Antenna Mode		CW06		Manufactured		SHENZHEN HENGXIANGTONG ANTENNA TECNOLOGY CO., LTD.																																									
Address		606, Building E, Enterprise Aviation Technology Innovation Research and Development Industrial Park, No. 1008, Songbai Road, Sunshine Community, Xili Street, Nanshan District, Shenzhen																																													
Size & Picture		UNIT :MM																																													
																																															
		Metal frame antenna Antenna matching circuit			<table><tr><th colspan="2">主射频匹配</th></tr><tr><th>位号</th><th>匹配值更改</th></tr><tr><td>C43</td><td>1.8pF</td></tr><tr><td>L7</td><td>0Ω</td></tr><tr><td>C44</td><td>4.7nh</td></tr><tr><td>R52</td><td>0Ω</td></tr><tr><td></td><td></td></tr><tr><th colspan="2">地弹片匹配</th></tr><tr><td>R29</td><td>0Ω</td></tr><tr><td>R30</td><td>NC</td></tr><tr><td>R48</td><td>0Ω</td></tr><tr><td>R49</td><td>NC</td></tr><tr><td>R51</td><td>0Ω</td></tr><tr><td></td><td></td></tr><tr><td>J1</td><td>贴</td></tr><tr><td>J2</td><td>贴</td></tr><tr><td>J4</td><td>NC</td></tr><tr><td>J7</td><td>贴</td></tr><tr><td>J8</td><td>NC</td></tr><tr><td>J10</td><td>贴</td></tr></table>			主射频匹配		位号	匹配值更改	C43	1.8pF	L7	0Ω	C44	4.7nh	R52	0Ω			地弹片匹配		R29	0Ω	R30	NC	R48	0Ω	R49	NC	R51	0Ω			J1	贴	J2	贴	J4	NC	J7	贴	J8	NC	J10	贴
主射频匹配																																															
位号	匹配值更改																																														
C43	1.8pF																																														
L7	0Ω																																														
C44	4.7nh																																														
R52	0Ω																																														
地弹片匹配																																															
R29	0Ω																																														
R30	NC																																														
R48	0Ω																																														
R49	NC																																														
R51	0Ω																																														
J1	贴																																														
J2	贴																																														
J4	NC																																														
J7	贴																																														
J8	NC																																														
J10	贴																																														
		BT: LOOP																																													
Band		Mode	Name		Frequency	Antenna Type	Antenna Max Gain																																								
BT	☒ Bluetooth				2400-2500	Loop	-0.52 dBi																																								

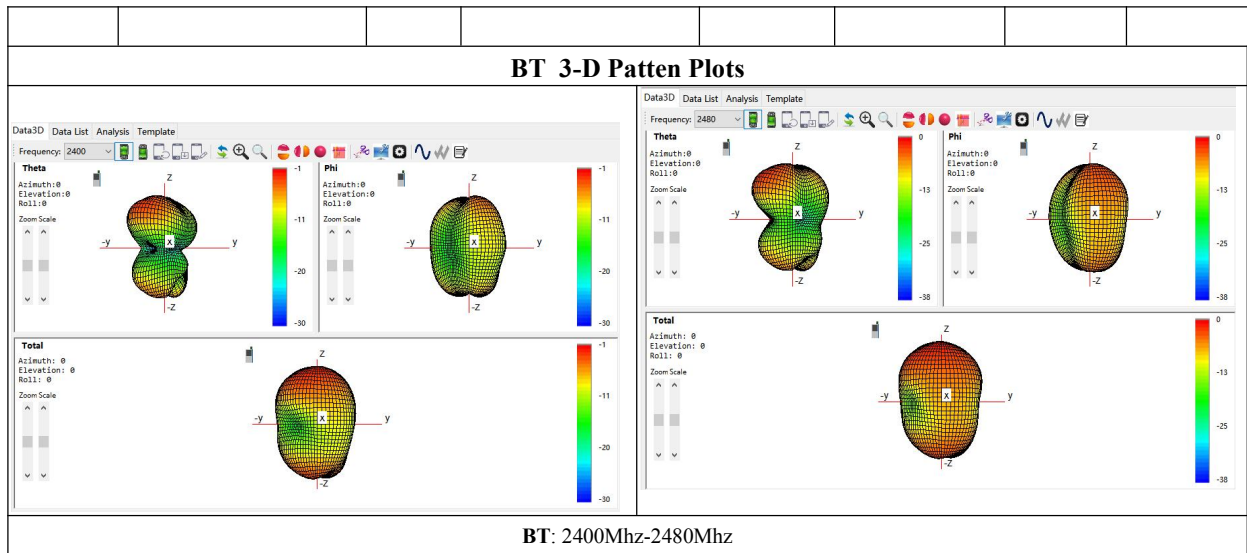

Passive Test For BT			
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
2400	20.89	-6.8	-1.74
2410	21.14	-6.75	-1.67
2420	22.53	-6.47	-1.42
2430	22.82	-6.42	-1.31
2440	23.81	-6.23	-1.07
2450	24.14	-6.17	-0.92
2460	24.51	-6.11	-0.68
2470	25.22	-5.98	-0.76
2480	25.87	-5.87	-0.52
2490	26.81	-5.72	-0.44
2500	27.94	-5.54	-0.39