



02:40:57 08.08.2023

11N20SISO\_Ant2\_5200

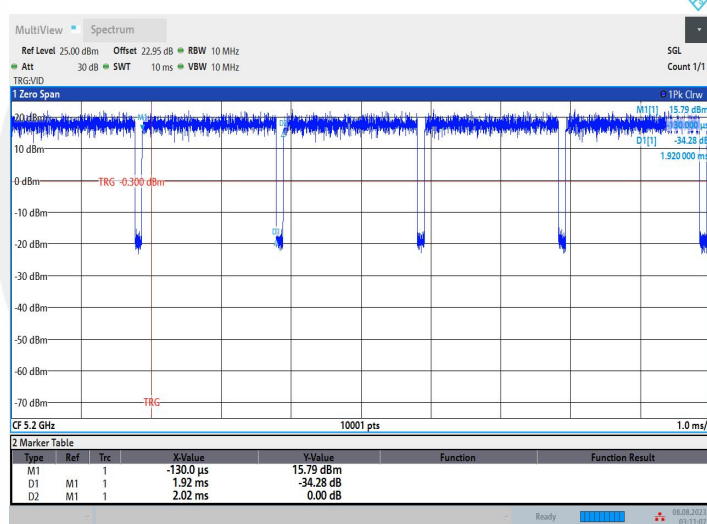


03:11:07 08.08.2023


11N20SISO\_Ant1\_5240

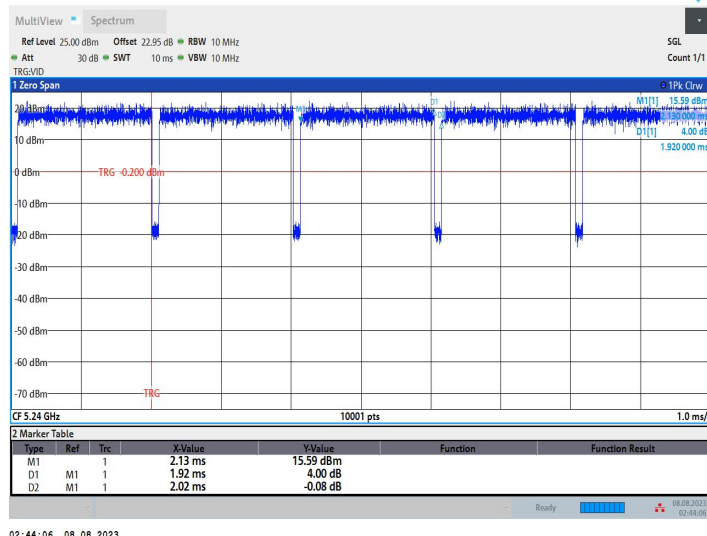


11N20SISO\_Ant2\_5240

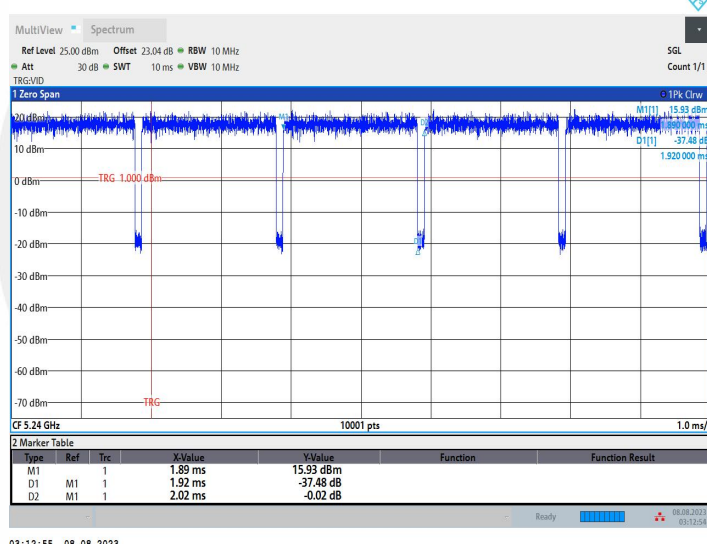


11N20SISO\_Ant1\_5745

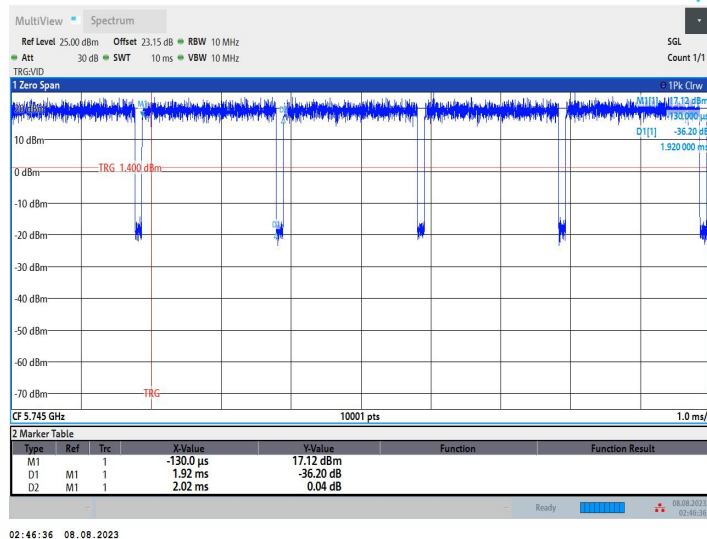


11N20SISO\_Ant2\_5745

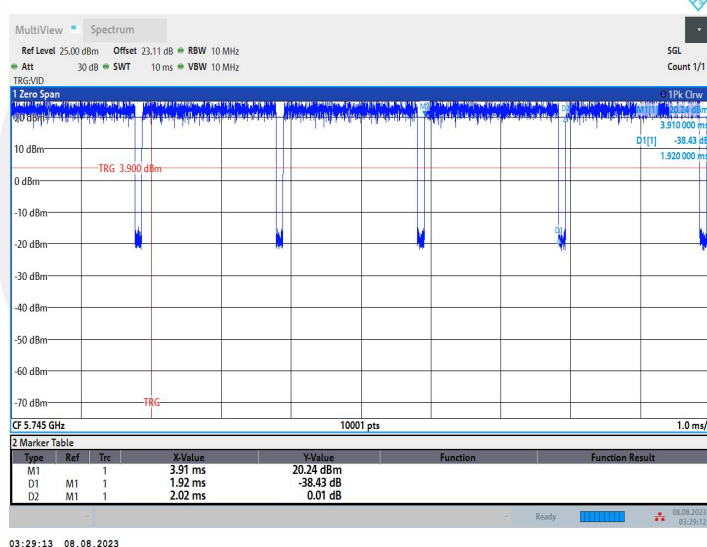


11N20SISO\_Ant1\_5785

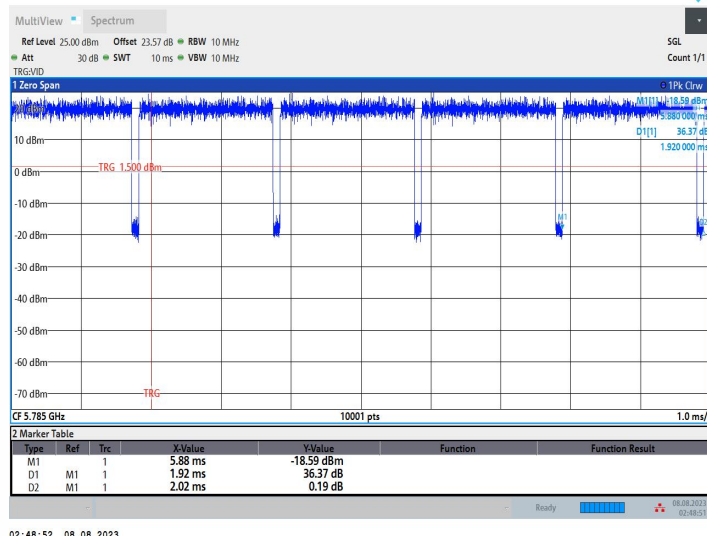


11N20SISO\_Ant2\_5785

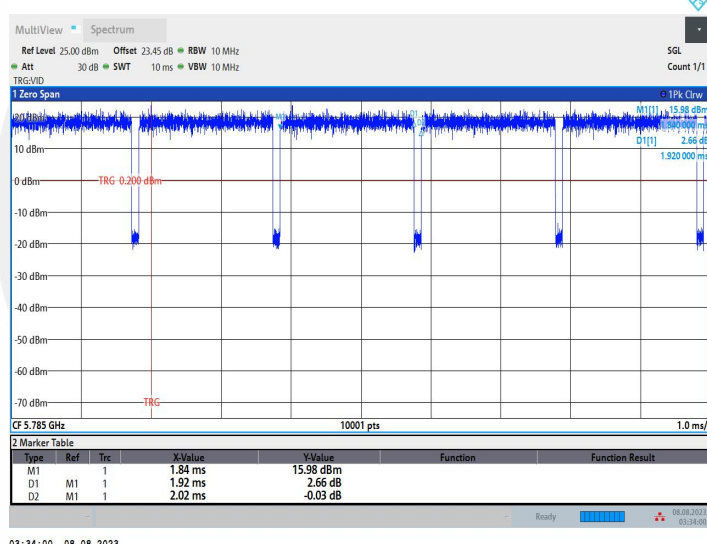

11N20SISO\_Ant1\_5825

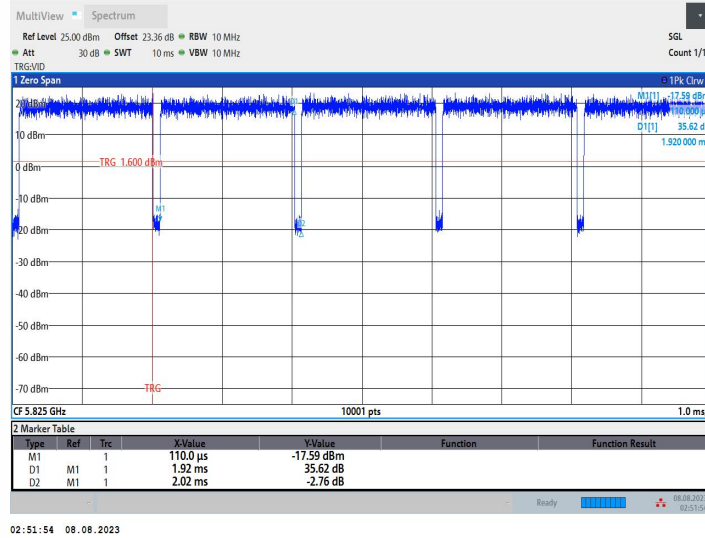


## 11N20SISO\_Ant2\_5825

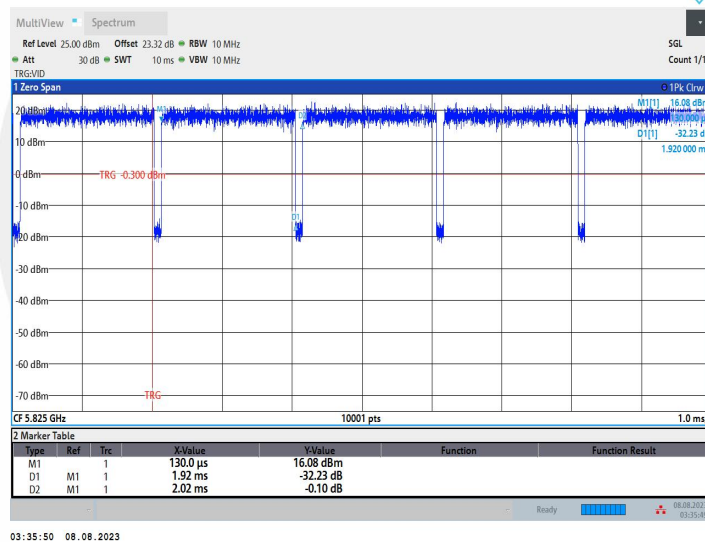


Test Mode	Antenna	Frequency[MHz]	ChannelPower [dBm]	Duty Cycle [%]	DC Factor [dBm]	Result [dBm]	Limit [dBm]	Verdict
11A	Ant1	5180	15.33	94.93	0.23	15.56	≤23.98	PASS
	Ant2	5180	16.63	94.93	0.23	16.86	≤23.98	PASS
	Ant1	5200	16.32	95.39	0.20	16.52	≤23.98	PASS
	Ant2	5200	18.13	94.93	0.23	18.36	≤23.98	PASS
	Ant1	5240	16.66	94.95	0.23	16.89	≤23.98	PASS
	Ant2	5240	18.14	95.39	0.20	18.34	≤23.98	PASS
	Ant1	5745	19.68	94.93	0.23	19.91	≤30.00	PASS
	Ant2	5745	17.31	95.39	0.20	17.51	≤30.00	PASS
	Ant1	5785	18.73	95.39	0.20	18.93	≤30.00	PASS
	Ant2	5785	17.15	95.39	0.20	17.35	≤30.00	PASS
	Ant1	5825	18.50	94.93	0.23	18.73	≤30.00	PASS
	Ant2	5825	17.21	94.93	0.23	17.44	≤30.00	PASS
11N20SISO	Ant1	5180	14.33	95.05	0.22	14.55	≤23.98	PASS
	Ant2	5180	13.72	95.05	0.22	13.94	≤23.98	PASS
	total	5180	/	/	/	17.27	≤22.84	PASS
	Ant1	5200	15.20	95.05	0.22	15.42	≤23.98	PASS
	Ant2	5200	15.00	95.05	0.22	15.22	≤23.98	PASS
	total	5200	/	/	/	18.33	≤22.84	PASS
	Ant1	5240	14.91	95.05	0.22	15.13	≤23.98	PASS
	Ant2	5240	14.96	95.05	0.22	15.18	≤23.98	PASS
	total	5240	/	/	/	18.17	≤22.84	PASS
	Ant1	5745	16.55	95.05	0.22	16.77	≤30.00	PASS
	Ant2	5745	15.55	95.05	0.22	15.77	≤30.00	PASS
	total	5745	/	/	/	19.31	≤28.86	PASS
	Ant1	5785	16.38	95.05	0.22	16.60	≤30.00	PASS
	Ant2	5785	15.54	95.05	0.22	15.76	≤30.00	PASS
	total	5785	/	/	/	18.69	≤28.86	PASS
	Ant1	5825	15.90	95.05	0.22	16.12	≤30.00	PASS
	Ant2	5825	15.16	95.05	0.22	15.38	≤30.00	PASS
	total	5825	/	/	/	18.78	≤28.86	PASS


## 11A\_Ant1\_5180

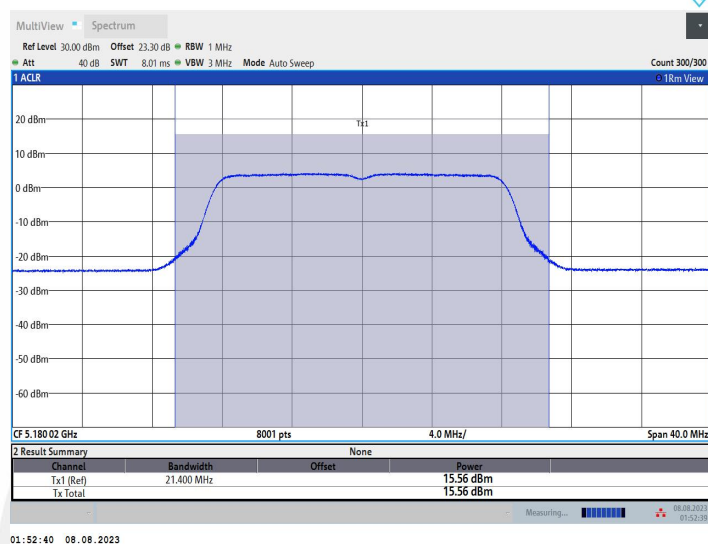


## 11A\_Ant2\_5180

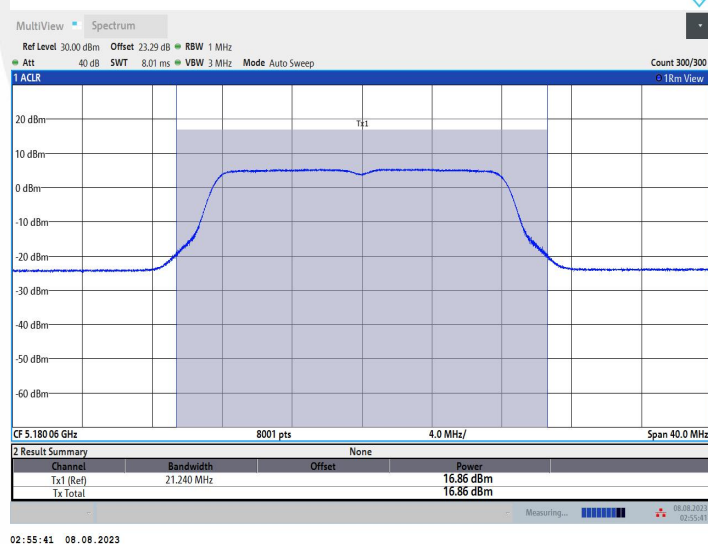

## 11A\_Ant1\_5200

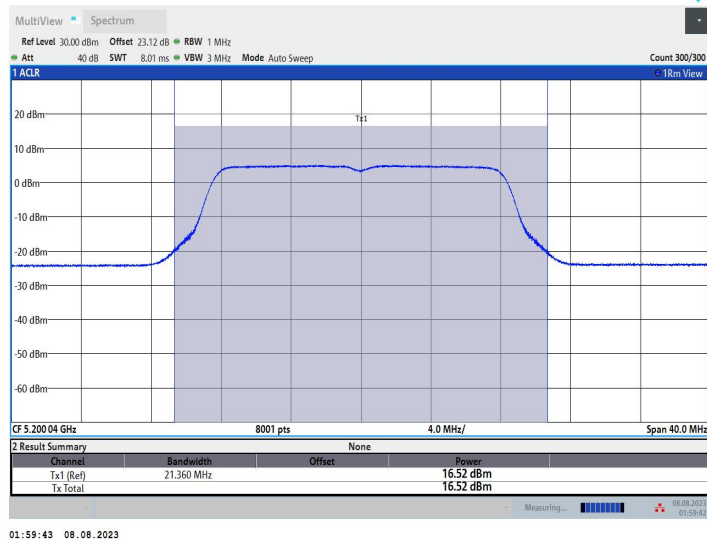


11A\_Ant2\_5200

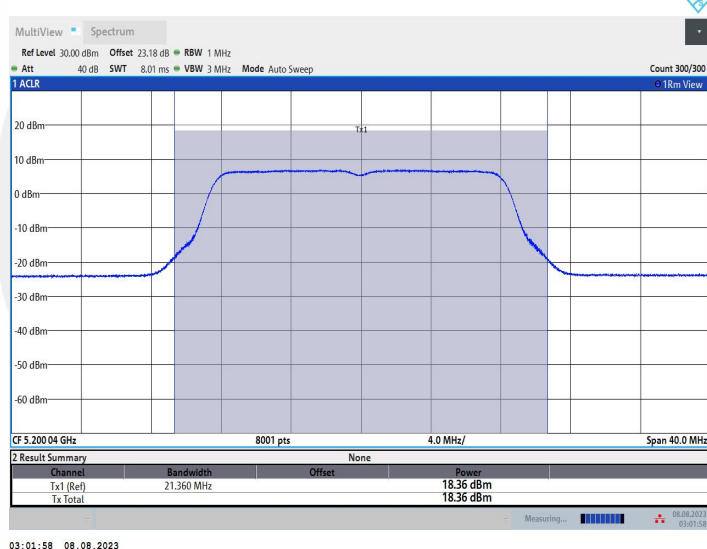


11A\_Ant1\_5240




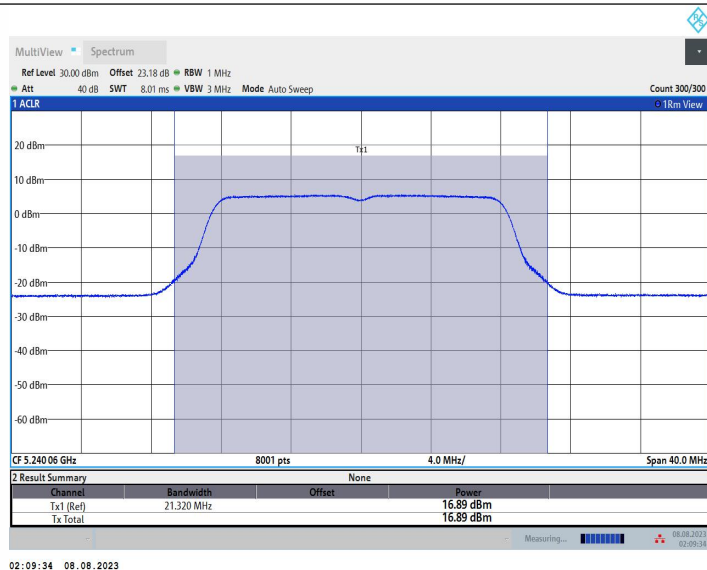


11A\_Ant2\_5240

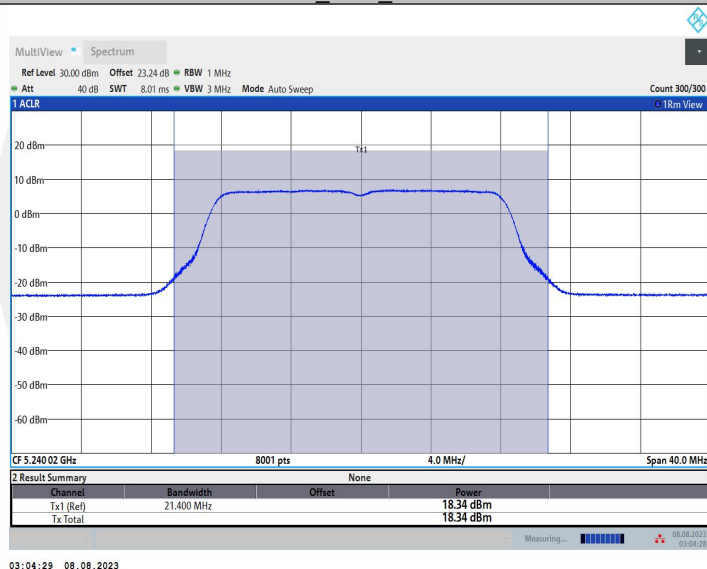

11A\_Ant1\_5745

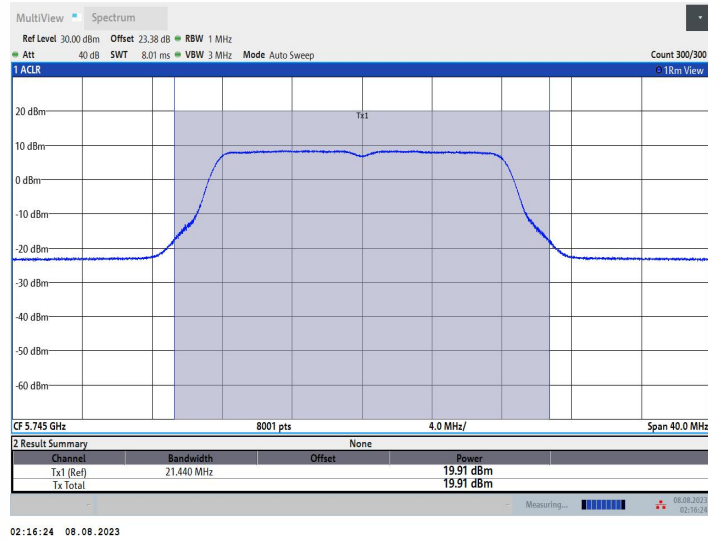


11A\_Ant2\_5745

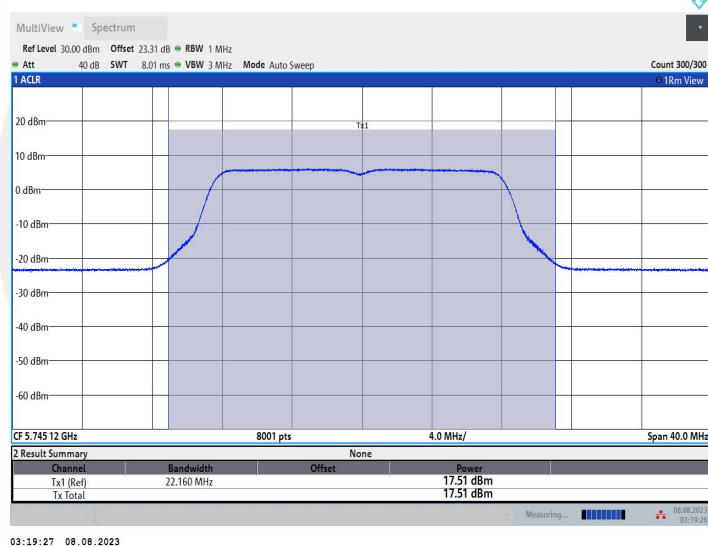


11A\_Ant1\_5785




11A\_Ant2\_5785

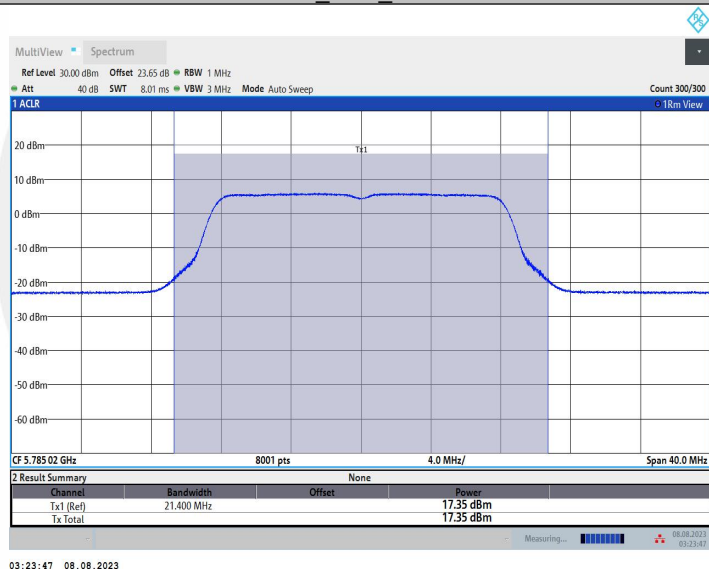


11A\_Ant1\_5825

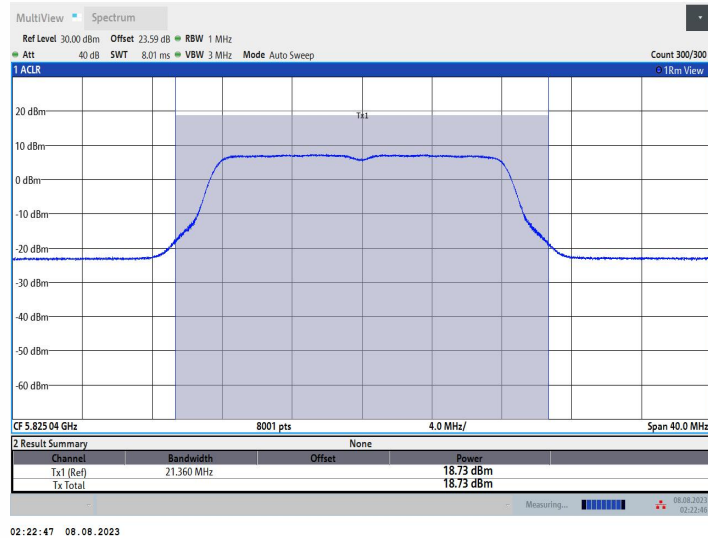


11A\_Ant2\_5825

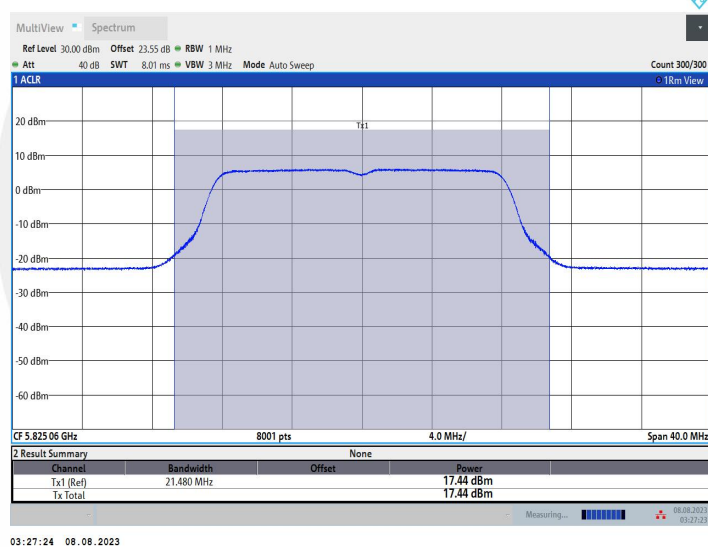


11N20SISO\_Ant1\_5180

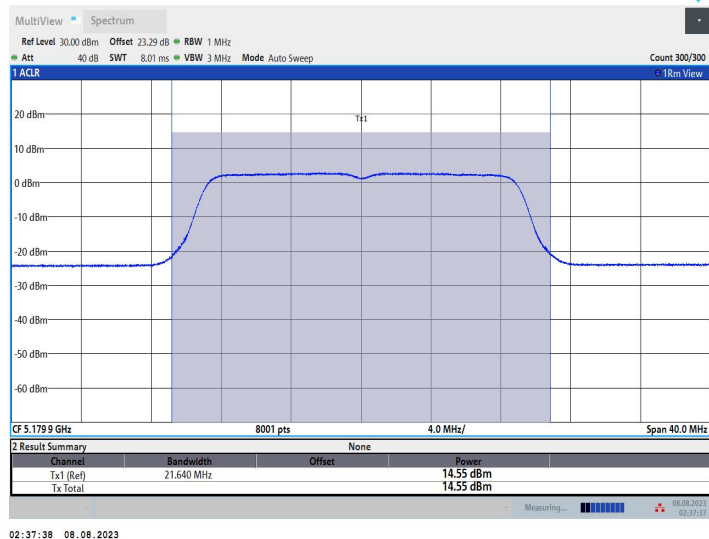


11N20SISO\_Ant2\_5180

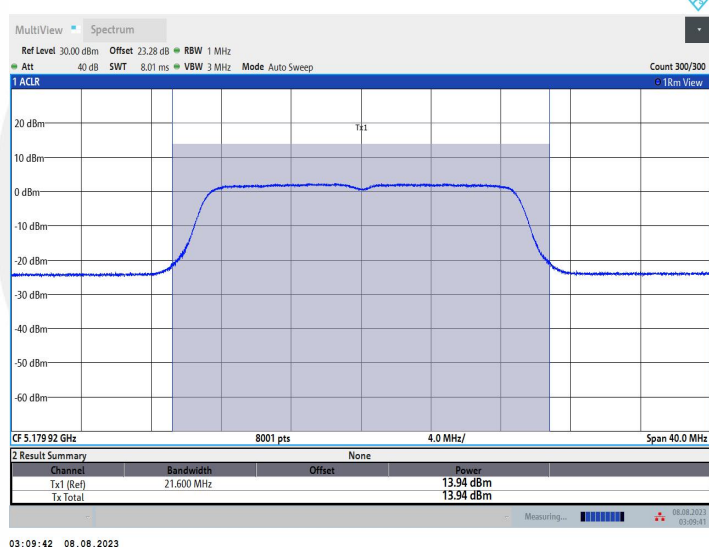

11N20SISO\_Ant1\_5200

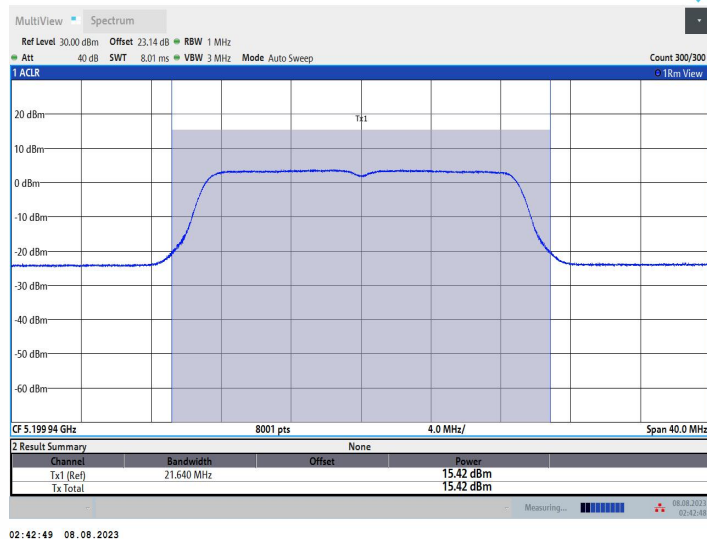


11N20SISO\_Ant2\_5200

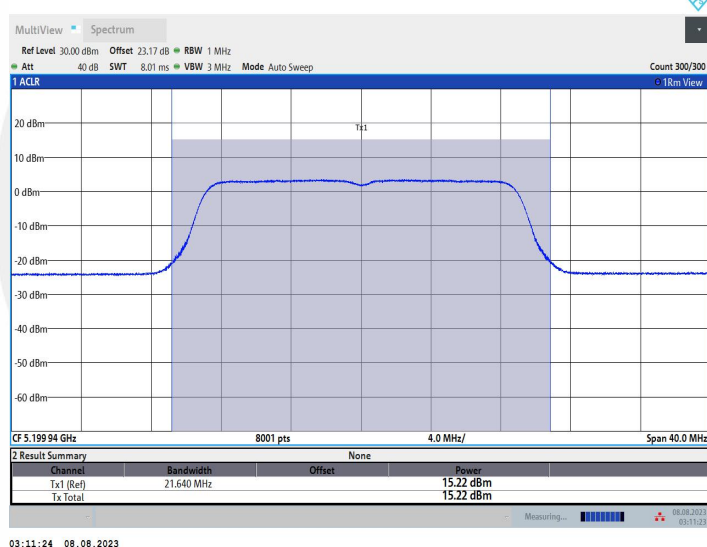


11N20SISO\_Ant1\_5240




11N20SISO\_Ant2\_5240

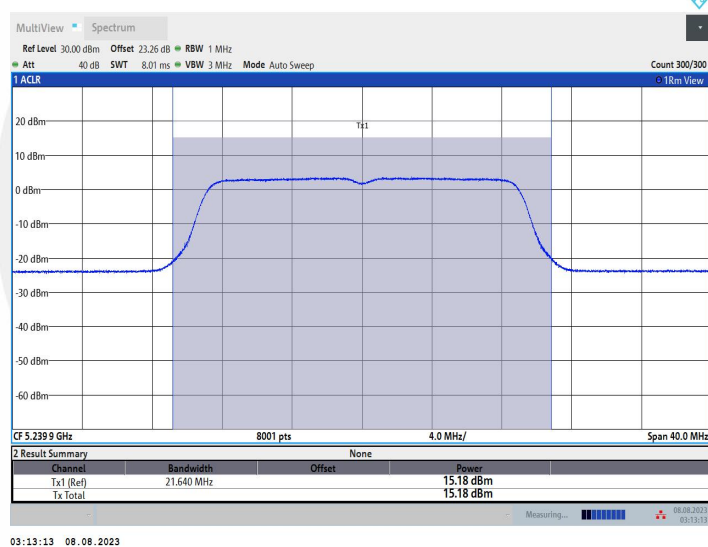

11N20SISO\_Ant1\_5745

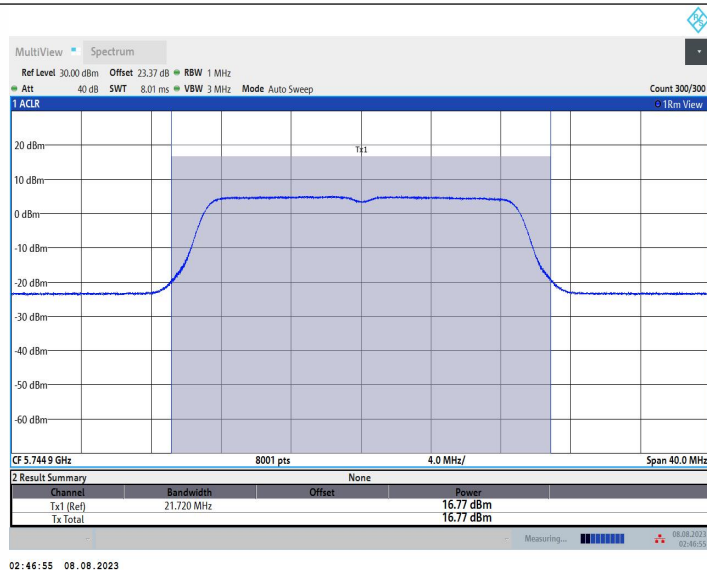


11N20SISO\_Ant2\_5745

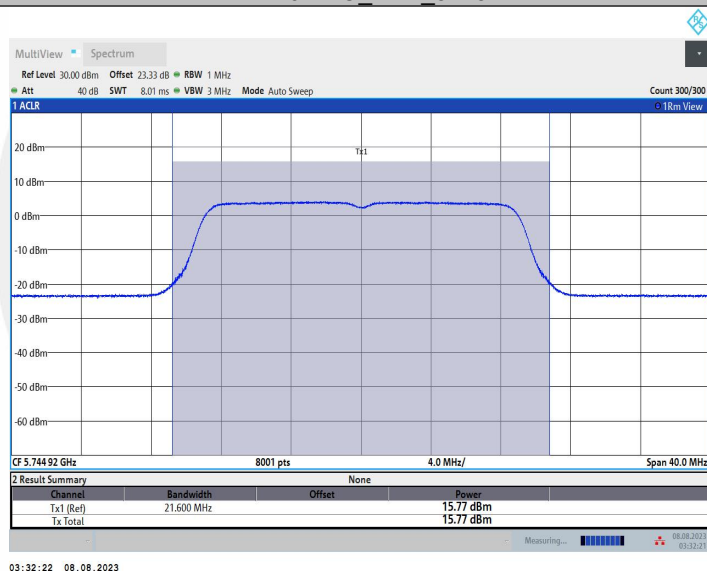


11N20SISO\_Ant1\_5785



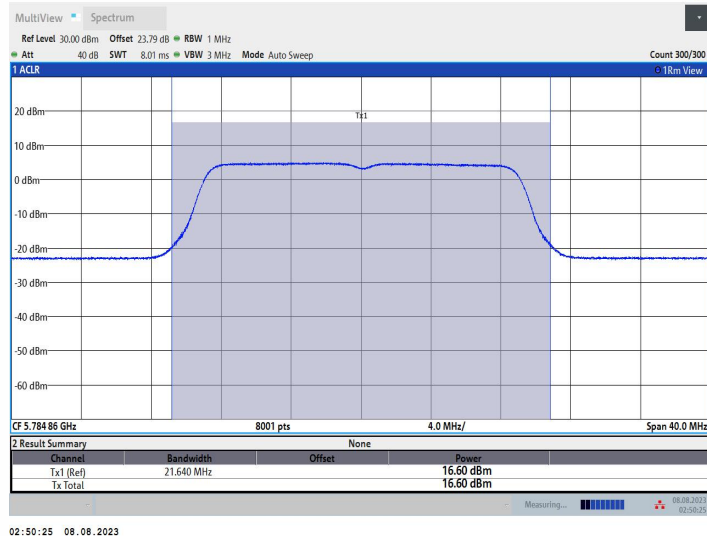


02:50:25 08.08.2023

11N20SISO\_Ant2\_5785

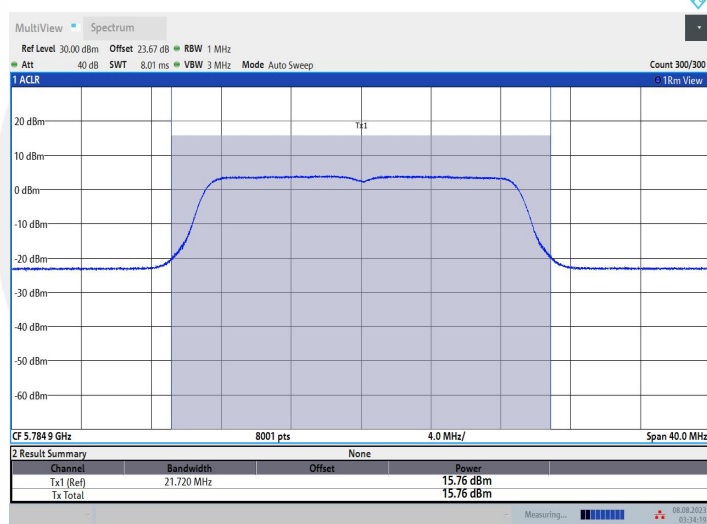


03:34:19 08.08.2023

11N20SISO\_Ant1\_5825

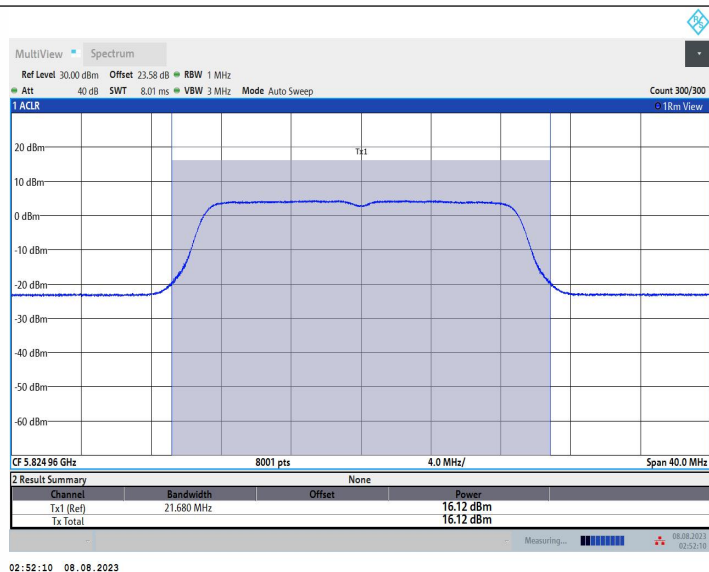

## 11N20SISO\_Ant2\_5825

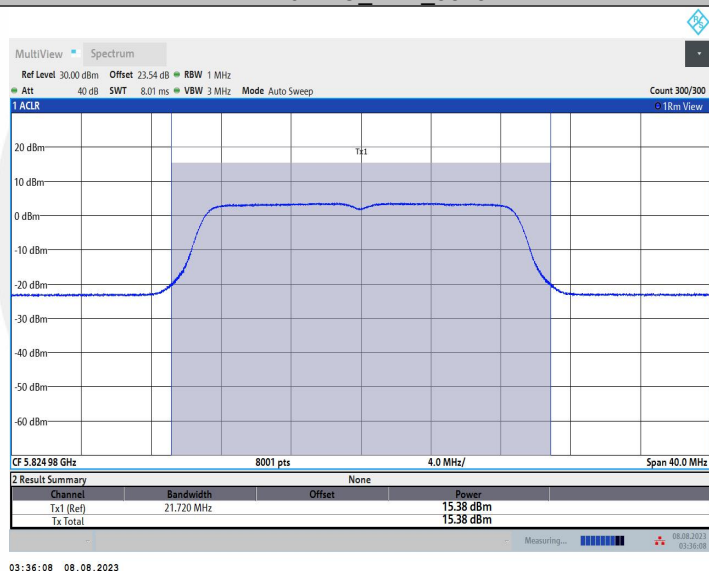

## 8.3 MAXIMUM PEAK POWER DENSITY

### 8.3.1 Applicable Standard

According to FCC Part 15.407(a)(1) for UNII Band I  
According to FCC Part 15.407(a)(2) for UNII Band II-A and UNII Band II-C  
According to FCC Part 15.407(a)(3) for UNII Band III  
According to 789033 D02 Section II(F)

### 8.3.2 Conformance Limit

■ For the band 5.15-5.25 GHz,

(a) (1) (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(a) (1) (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(a) (1) (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(a) (1) (iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ For the 5.25-5.35 GHz and 5.47-5.725 GHz bands

(b) (2) The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ For the band 5.725-5.85 GHz

(a) (3) for the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30

dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations

### 8.3.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

### 8.3.4 Test Procedure

Methods refer to FCC KDB 789033

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:


- a) Set  $RBW \geq 1/T$ , where T is defined in section II.B.I.a).
- b) Set  $VBW \geq 3 RBW$ .
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add  $10\log(500\text{kHz}/RBW)$  to the measured result, whereas  $RBW (< 500 \text{ KHz})$  is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add  $10\log(1\text{MHz}/RBW)$  to the measured result, whereas  $RBW (< 1 \text{ MHz})$  is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since  $RBW=100 \text{ KHz}$  is available on nearly all spectrum analyzers.


### 8.3.5 Test Results

TestMode	Antenna	Frequency[MHz]	Result [dBm/MHz]	Limit[dBm/MHz]	Verdict
11A	Ant1	5180	4.2	≤11.00	PASS
	Ant2	5180	5.5	≤11.00	PASS
	Ant1	5200	5.02	≤11.00	PASS
	Ant2	5200	7.03	≤11.00	PASS
	Ant1	5240	5.6	≤11.00	PASS
	Ant2	5240	7.02	≤11.00	PASS
	Ant1	5745	5.77	≤30.00	PASS
	Ant2	5745	3.37	≤30.00	PASS
	Ant1	5785	4.9	≤30.00	PASS
	Ant2	5785	3.29	≤30.00	PASS
	Ant1	5825	4.53	≤30.00	PASS
	Ant2	5825	3.22	≤30.00	PASS
11N20SISO	Ant1	5180	2.92	≤11.00	PASS
	Ant2	5180	2.45	≤11.00	PASS
	Ant1	5200	4.08	≤11.00	PASS
	Ant2	5200	3.57	≤11.00	PASS
	Ant1	5240	3.51	≤11.00	PASS
	Ant2	5240	3.59	≤11.00	PASS
	Ant1	5745	2.38	≤30.00	PASS
	Ant2	5745	1.35	≤30.00	PASS
	Ant1	5785	2.11	≤30.00	PASS
	Ant2	5785	1.38	≤30.00	PASS
	Ant1	5825	1.7	≤30.00	PASS
	Ant2	5825	0.91	≤30.00	PASS


## 11A\_Ant1\_5180

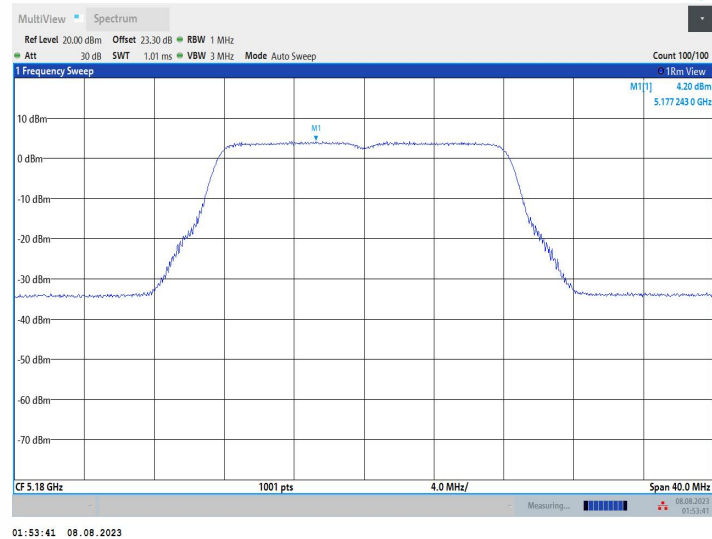


## 11A\_Ant2\_5180

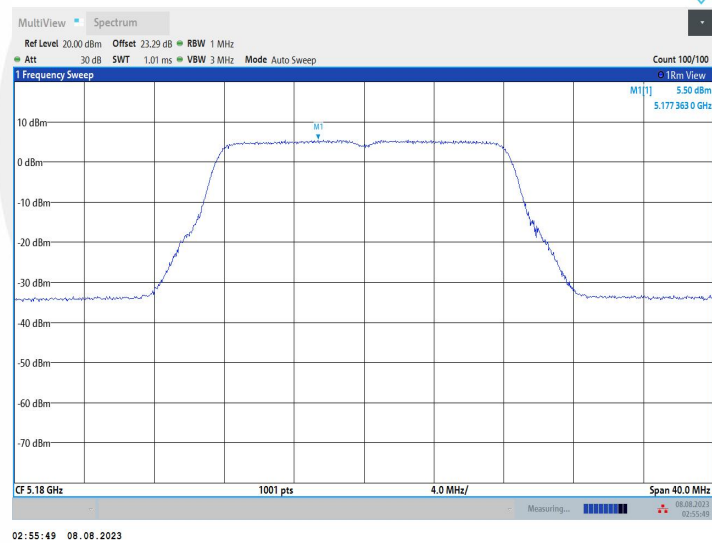


## 11A\_Ant1\_5200

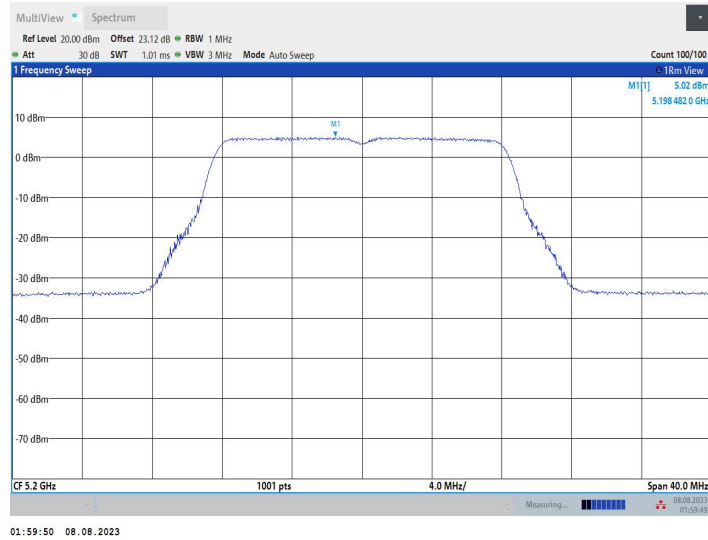


11A\_Ant2\_5200

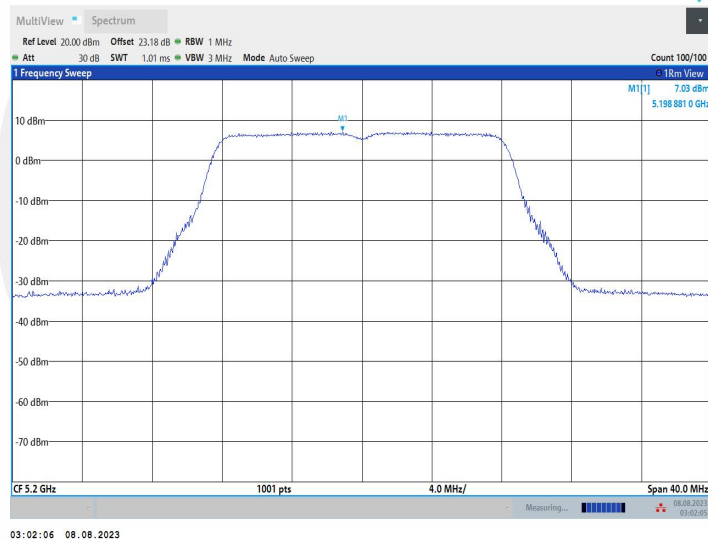

11A\_Ant1\_5240

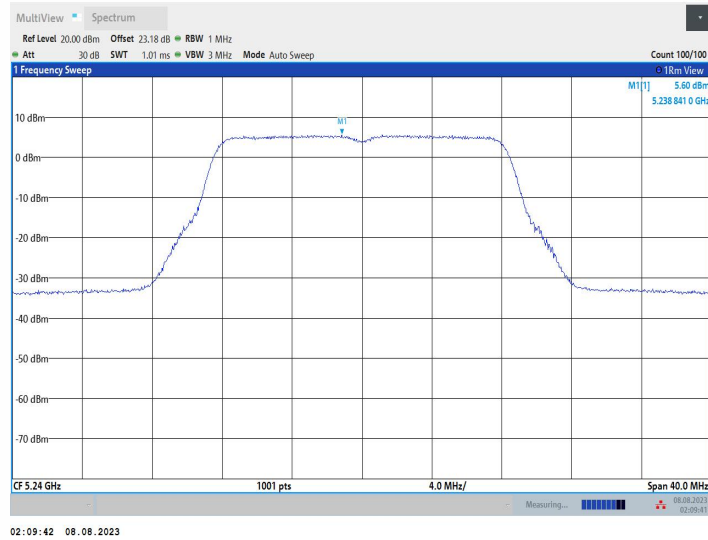


11A\_Ant2\_5240

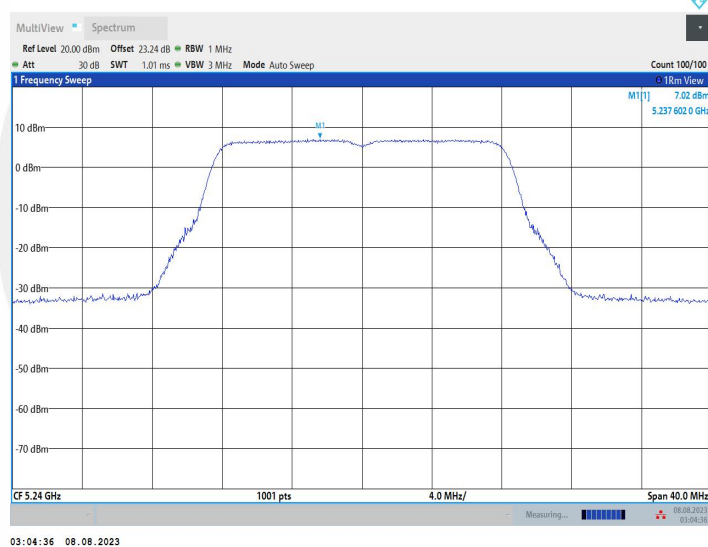


11A\_Ant1\_5745



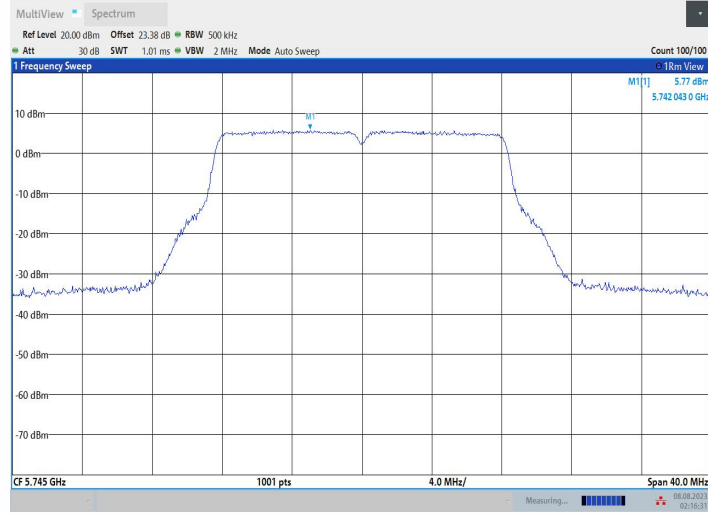

11A\_Ant2\_5745

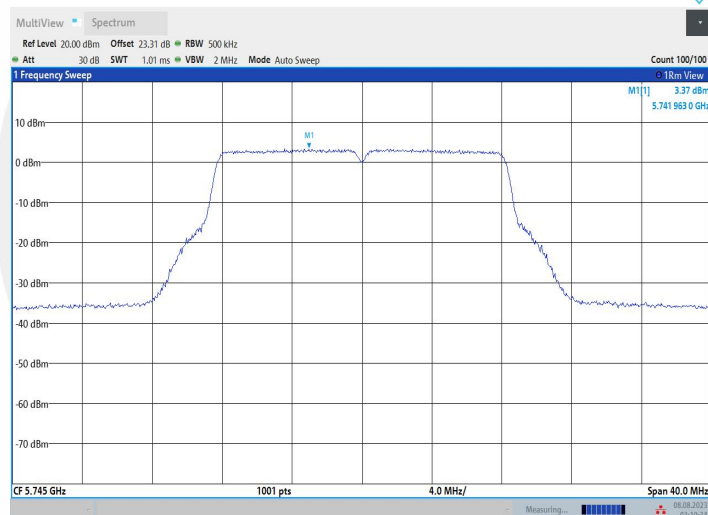

11A\_Ant1\_5785