


FCC Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2341-4
FCC ID : IHDT56AM3
STANDARD : 47 CFR Part 15 Subpart B
CLASSIFICATION : Certification
TEST DATE(S) : May 15, 2023 ~ May 17, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.



Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1. GENERAL DESCRIPTION	5
1.1. Applicant.....	5
1.2. Manufacturer	5
1.3. Product Feature of Equipment Under Test	5
1.4. Product Specification of Equipment Under Test	6
1.5. Modification of EUT	7
1.6. Specification of Accessory	7
1.7. Test Location	8
1.8. Test Software	8
1.9. Applicable Standards	8
2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1. Test Mode	9
2.2. Connection Diagram of Test System	11
2.3. Support Unit used in test configuration and system	11
2.4. EUT Operation Test Setup	12
3. TEST RESULT	13
3.1. Test of AC Conducted Emission Measurement	13
3.2. Test of Radiated Emission Measurement	17
4. LIST OF MEASURING EQUIPMENT	22
5. MEASUREMENT UNCERTAINTY	23
APPENDIX A. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FC332006-01	Rev. 01	Initial issue of report	May 30, 2023

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 10.62 dB at 0.163 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 5.71 dB at 43.580 MHz

Conformity Assessment Condition:

The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account. Please refer to each test results in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1. General Description

1.1. Applicant

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2. Manufacturer

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2341-4
FCC ID	IHDT56AM3
EUT supports Radios application	GSM/WCDMA/LTE WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20 WLAN 5GHz 802.11ac VHT20 Bluetooth BR/EDR/LE GNSS/NFC/FM
IMEI Code	Conduction: 356960280003935/356960280003943 for Sample1 356960280013116/356960280013124 for Sample2 Radiation: 356960280003992/356960280004008 for Sample1 356960280012597/356960280012605 for Sample2
HW Version	DVT2
SW Version	TLA33.30
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two types of EUT, the sample 1 is 1st source + Battery 1 and the sample 2 is 2nd source + Battery 2. The difference could refer to the XT2341-4_Operational Description of Product Equality Declaration which is exhibit separately. According to the difference, we evaluate the sample 1 to perform full test and the sample 2 were verified for the worse cases.

1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	GSM850: 824 MHz ~ 849 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 5 : 824 MHz ~ 849 MHz LTE Band 7 : 2500 MHz ~ 2570 MHz LTE Band 26 : 814 MHz ~ 849 MHz LTE Band 38 : 2570 MHz ~ 2620 MHz LTE Band 41 : 2496 MHz ~ 2690 MHz 802.11b/g/n: 2400 MHz ~ 2483.5 MHz 802.11a/n/ac: 5150 MHz ~ 5250 MHz; 5250 MHz ~ 5350 MHz; 5470 MHz ~ 5725 MHz 5725 MHz ~ 5850 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC : 13.56 MHz
Rx Frequency	GSM850: 869 MHz ~ 894 MHz WCDMA Band V: 869 MHz ~ 894 MHz LTE Band 5 : 869 MHz ~ 894 MHz LTE Band 7 : 2620 MHz ~ 2690 MHz LTE Band 26 : 859 MHz ~ 894 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41 : 2496 MHz ~ 2690 MHz 802.11b/g/n: 2400 MHz ~ 2483.5 MHz 802.11a/n/ac: 5150 MHz ~ 5250 MHz; 5250 MHz ~ 5350 MHz; 5470 MHz ~ 5725 MHz 5725 MHz ~ 5850 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC : 13.56 MHz GNSS : 1559 MHz ~ 1610 MHz FM : 88 MHz ~ 108 MHz
Antenna Type	WWAN : PIFA Antenna WLAN : PIFA Antenna Bluetooth : PIFA Antenna GNSS: PIFA Antenna NFC: Coil Antenna FM : External Earphone Antenna
Type of Modulation	GSM/GPRS: GMSK EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK WCDMA : BPSK (Uplink) HSDPA/DC-HSDPA : QPSK (Uplink) HSUPA : QPSK (Uplink) HSPA+ : 16QAM(16QAM uplink is not supported) DC-HSDPA : 64QAM LTE: QPSK / 16QAM 802.11b: DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK

	Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK GNSS : BPSK NFC: ASK FM
--	---

1.5. Modification of EUT

No modifications are made to the EUT during all test items.

1.6. Specification of Accessory

Specification of Accessory				
AC Adapter 1 (US)	Brand Name	Motorola (Salcomp)	Model Name	MC-201L
AC Adapter 1 (EU)	Brand Name	Motorola (Salcomp)	Model Name	MC-202L
AC Adapter 1 (AR)	Brand Name	Motorola (Salcomp)	Model Name	MC-206L
AC Adapter 1 (BR)	Brand Name	Motorola (Salcomp)	Model Name	MC-207L
AC Adapter 1 (CHILE)	Brand Name	Motorola (Salcomp)	Model Name	MC-209L
AC Adapter 2 (US)	Brand Name	Motorola (Aohai)	Model Name	MC-201L
AC Adapter 2 (EU)	Brand Name	Motorola (Aohai)	Model Name	MC-202L
AC Adapter 2 (AR)	Brand Name	Motorola (Aohai)	Model Name	MC-206L
AC Adapter 3 (US)	Brand Name	Motorola (Aohai)	Model Name	MC-101
AC Adapter 3 (EU)	Brand Name	Motorola (Aohai)	Model Name	MC-102
AC Adapter 3 (UK)	Brand Name	Motorola (Aohai)	Model Name	MC-103
AC Adapter 3 (AU)	Brand Name	Motorola (Aohai)	Model Name	MC-105
AC Adapter 4 (US)	Brand Name	Motorola (Chenyang)	Model Name	MC-101
AC Adapter 4 (EU)	Brand Name	Motorola (Chenyang)	Model Name	MC-102
AC Adapter 4 (UK)	Brand Name	Motorola (Chenyang)	Model Name	MC-103
AC Adapter 4 (AU)	Brand Name	Motorola (Chenyang)	Model Name	MC-105
AC Adapter 5 (US)	Brand Name	Motorola (Salcomp)	Model Name	MC-101
AC Adapter 5 (EU)	Brand Name	Motorola (Salcomp)	Model Name	MC-102
AC Adapter 5 (UK)	Brand Name	Motorola (Salcomp)	Model Name	MC-103
AC Adapter 5 (AU)	Brand Name	Motorola (Salcomp)	Model Name	MC-105
Battery 1	Brand Name	Motorola (ATL)	Model Name	PC50
Battery 2	Brand Name	Motorola (SCUD)	Model Name	PC50
Earphone 1	Brand Name	Motorola (New leader)	Model Name	NLD-EM313A-20SF
Earphone 2	Brand Name	Motorola (JWELL)	Model Name	JWEP1205-L20H
USB Cable 1	Brand Name	Motorola (SAIBAO)	Model Name	SLQ-A214A
USB Cable 2	Brand Name	Motorola (JWELL)	Model Name	ATOC

1.7. Test Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH07-KS	CN1257	314309

1.8. Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH07-KS	AUDIX	E3	6.2009-8-24a1
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.9. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart B
- ♦ ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2. Test Configuration of Equipment Under Test

2.1. Test Mode


The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: GSM 850 Rx(Middle) Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Earphone 1 + Battery 1 + USB Cable1 (Charging from Adapter 1) + SIM 1 for Sample1
	Mode 2: WCDMA 850 Rx(Low) Bluetooth Idle + WLAN (5G) Idle + Camera(Front) + Earphone 2 + Battery 1 + USB Cable2 (Charging from Adapter 2) + SIM 2 for Sample1
	Mode 3: WCDMA 850 Rx(High) Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + Earphone 1 + Battery 1 + USB Cable2(Charging from Adapter 3) + SIM 1 for Sample1
	Mode 4: LTE B41 Rx Bluetooth Idle + WLAN (5G) Idle + FM Rx(98) + Earphone 2 + Battery 1 + USB Cable2(Charging from Adapter 4) + SIM 2 for Sample1
	Mode 5: LTE Band 5 Rx(High) Bluetooth Idle + WLAN (2.4G) Idle + GNSS Rx + Earphone 1 + Battery 1 + USB Cable2(Charging from Adapter 5) + SIM 1 for Sample1
	Mode 6: LTE Band 26 Rx(Low) Bluetooth Idle + WLAN (5G) Idle + NFC On + Earphone 1 + Battery 1 + USB Cable 1(Data Link with Notebook) + EUT (eMMC) USB Data Link to PC/NB+ SIM 2 for Sample1
	Mode 7: LTE Band 5 Rx(Middle) Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + Earphone 1 + Battery 1 + USB Cable 1(Data Link with Notebook) +PC/NB USB Data Link to EUT (eMMC)+ SIM 1 for Sample1
	Mode 8: WCDMA 850 Rx(Low) Bluetooth Idle + WLAN (5G) Idle + MPEG4(Run Color Bar) + Earphone 1 + Battery 1 + USB Cable 1(Data Link with Notebook) + EUT (SD) USB Data Link to PC/NB+ SIM 2 for Sample1
	Mode 9: WCDMA 850 Rx(Low) Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + Earphone 1 + Battery 1 + USB Cable 1(Data Link with Notebook)+PC/NB USB Data Link to EUT (SD) + SIM 2 for Sample1
	Mode 10 : WCDMA 850 Rx(Low) Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + Earphone 1 + Battery 1 + USB Cable 2(Data Link with Notebook)+ PC/NB USB Data Link to EUT (eMMC) for Sample1
	Mode 11 : WCDMA 850 Rx(Low) Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Earphone 1 + Battery 2 + USB Cable2(Charging from Adapter 3) + SIM 1 for Sample2
	Mode 12 : WCDMA 850 Rx(Low) Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + Earphone 1 + Battery 2 + USB Cable1 (Data

	Link with Notebook) + SIM 1 for Sample2
Radiated Emissions	Mode 1: GSM 850 Rx(Middle) Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Earphone 1 + Battery 1 + USB Cable1 (Charging from Adapter 1) + SIM 1 for Sample1
	Mode 2: WCDMA 850 Rx(Low) Bluetooth Idle + WLAN (5G) Idle + Camera(Front) + Earphone 2 + Battery 1 + USB Cable2 (Charging from Adapter 2) + SIM 2 for Sample1
	Mode 3: WCDMA 850 Rx(High) Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + Earphone 1 + Battery 1 + USB Cable1(Charging from Adapter 3) + SIM 1 for Sample1
	Mode 4: LTE B41 Rx Bluetooth Idle + WLAN (5G) Idle + FM Rx(98) + Earphone 2 + Battery 1 + USB Cable1(Charging from Adapter 4) + SIM 2 for Sample1
	Mode 5: LTE Band 5 Rx(High) Bluetooth Idle + WLAN (2.4G) Idle + GNSS Rx + Earphone 1 + Battery 1 + USB Cable1(Charging from Adapter 5) + SIM 1 for Sample1
	Mode 6: LTE Band 26 Rx(Low) Bluetooth Idle + WLAN (5G) Idle + NFC On + Earphone 1 + Battery 1 + USB Cable 1(Data Link with Notebook)+ EUT (eMMC) USB Data Link to PC/NB + SIM 2 for Sample1
	Mode 7: LTE Band 5 Rx(Middle) Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Earphone 1 + Battery 1 + USB Cable 1(Data Link with Notebook) +PC/NB USB Data Link to EUT (eMMC)+ SIM 1 for Sample1
	Mode 8: GSM 850 Rx(Middle) Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Earphone 1 + Battery 1 + USB Cable 1(Data Link with Notebook)+EUT (SD) USB Data Link to PC/NB + SIM 2 for Sample1
	Mode 9: GSM 850 Rx(Middle) Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Earphone 1 + Battery 1 + USB Cable 1(Data Link with Notebook)+ PC/NB USB Data Link to EUT (SD) + SIM 2 for Sample1
	Mode 10 : GSM 850 Rx(Middle) Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Earphone 1 + Battery 1 + USB Cable 2(Data Link with Notebook)+ EUT (SD) USB Data Link to PC/NB + SIM 1 for Sample1
	Mode 11 : GSM 850 Rx(Middle) Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Earphone 1 + Battery 2 + USB Cable 1(Charging from Adapter 1) + SIM 1 for Sample2
	Mode 12 : LTE Band 5 Rx(Middle) Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Earphone 1 + Battery 2 + USB Cable 1(Data Link with Notebook)+PC/NB USB 1 Data Link to EUT (eMMC) + SIM 1 for Sample2
Remark: <ol style="list-style-type: none"> 1. The worst case of AC is mode 3; only the test data of this mode is reported. 2. The worst case of RE is mode 11; only the test data of this mode is reported. 3. Data Link with Notebook / PC means data application transferred mode between EUT and Notebook / PC. 4. Pre-scanned Low/Middle/High channel for GSM 850/WCDMA Band V/LTE Band 5/26 and FM Rx, the worst channel was recorded in this report. 	

2.2.Connection Diagram of Test System

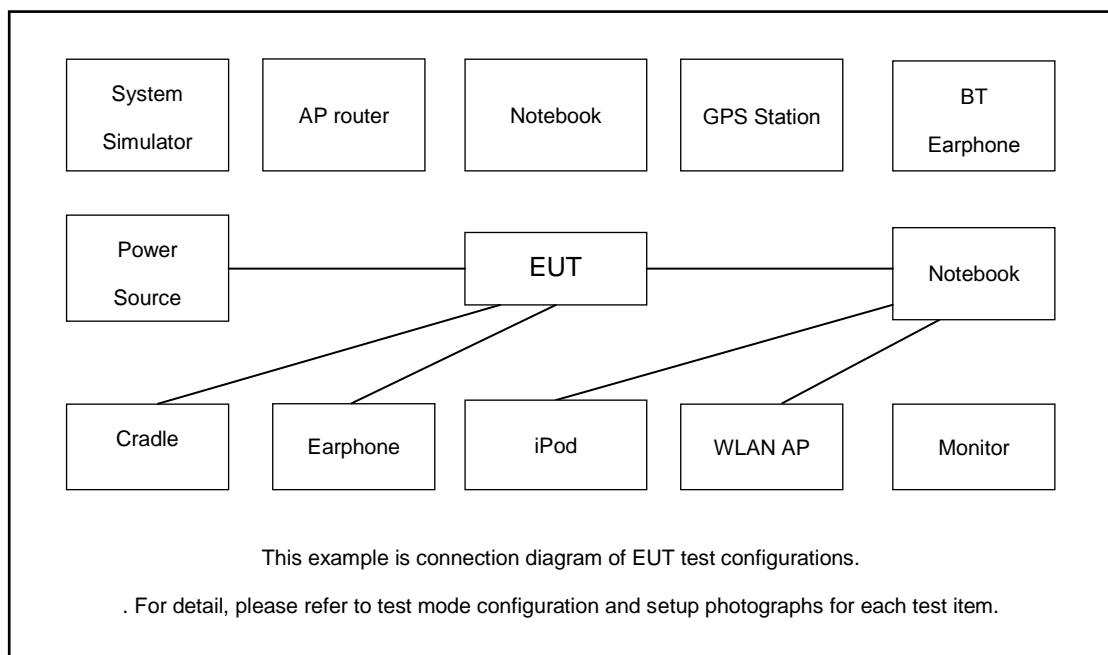

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application

2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritus	MT8821C	N/A	N/A	Unshielded,1.8m
2.	System Simulator	Anritus	MT8820C	N/A	N/A	Unshielded,1.8m
3.	Vector Signal Generator	R&S	SMBV100A	258305	N/A	N/A
4.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
5.	WLAN AP	TP-Link	TL-WDR5600	N/A	N/A	Unshielded,1.8m
6.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
7.	Bluetooth Earphone	Xiaomi	LYEJ02LM	N/A	N/A	N/A
8.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
9.	Notebook	Lenovo	V130-14IKB001	N/A	N/A	N/A
10.	Hard Disk	Lenovo	F310	DoC	Shielded, 1.2m	N/A
11.	Hard disk	KINGSHARE	KSP6120G	N/A	N/A	N/A
12.	SD Card	Kingston	8GB	N/A	N/A	N/A
13.	SD Card	SanDisk	Uitra	N/A	N/A	N/A

2.4. EUT Operation Test Setup

The EUT was in GSM or WCDMA or LTE idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on camera to capture images.
3. Turn on MPEG4 function.
4. Turn on FM function to make the EUT receive continuous signals from FM station.
5. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.
6. Turn on NFC function

3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.1.4 Test Setup

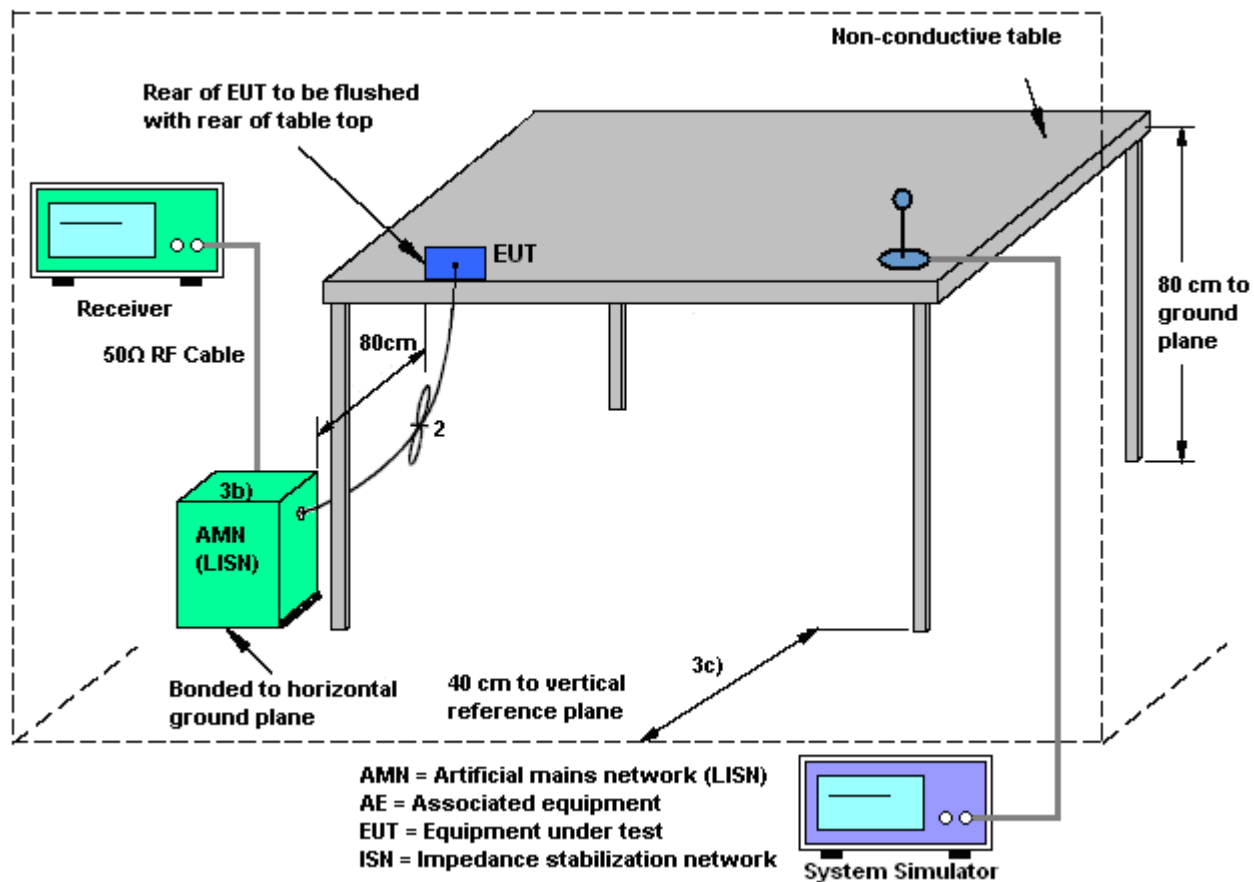

3.1.5 Test Result of AC Conducted Emission

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

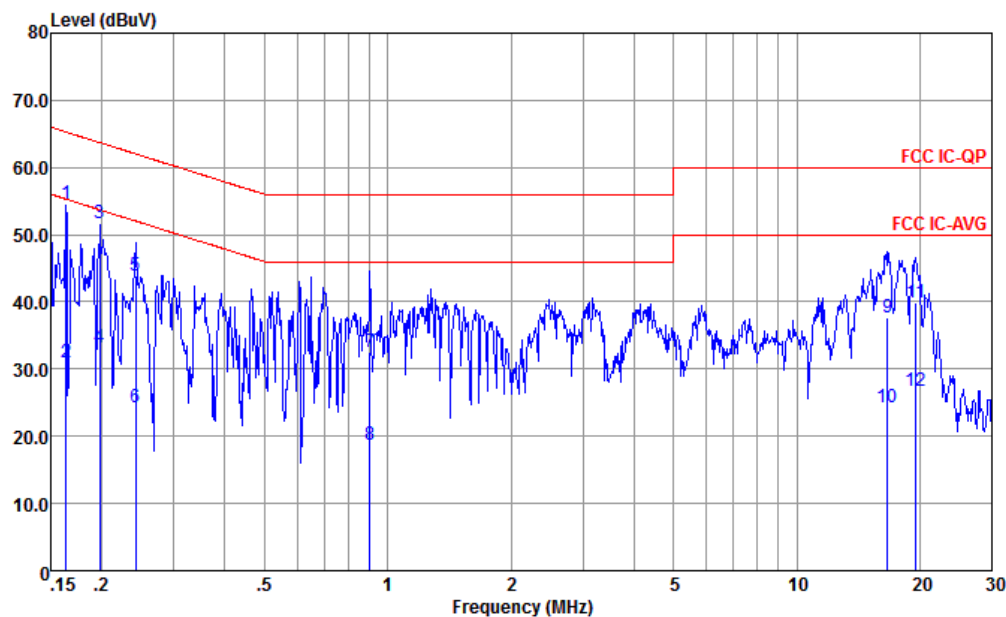


Site : CO01-KS
Condition : FCC IC-QP LISN-060105-LINE LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 *	0.163	54.68	-10.62	65.30	44.19	0.06	10.43	QP
2	0.163	30.98	-24.32	55.30	20.49	0.06	10.43	Average
3	0.198	51.74	-11.97	63.71	41.30	0.02	10.42	QP
4	0.198	33.24	-20.47	53.71	22.80	0.02	10.42	Average
5	0.242	43.93	-18.11	62.04	33.50	0.04	10.39	QP
6	0.242	24.23	-27.81	52.04	13.80	0.04	10.39	Average
7	0.904	32.53	-23.47	56.00	22.51	-0.10	10.12	QP
8	0.904	18.83	-27.17	46.00	8.81	-0.10	10.12	Average
9	16.661	37.62	-22.38	60.00	26.60	-0.25	11.27	QP
10	16.661	24.22	-25.78	50.00	13.20	-0.25	11.27	Average
11	19.532	39.81	-20.19	60.00	28.80	-0.31	11.32	QP
12	19.532	26.71	-23.29	50.00	15.70	-0.31	11.32	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

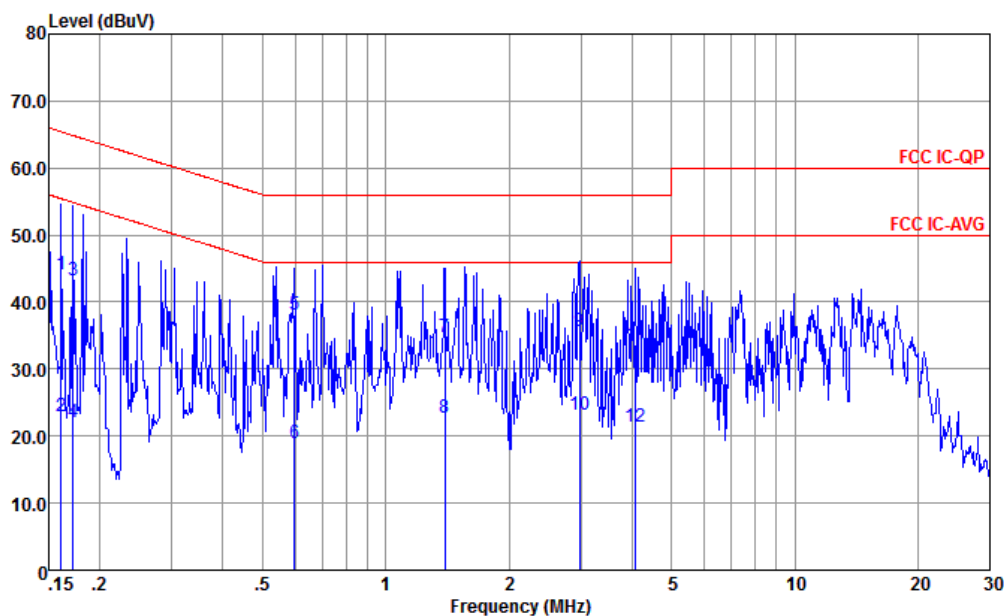

Site : CO01-KS
Condition : FCC IC-QP LISN-060105-NEUTRAL NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.161	44.06	-21.37	65.43	33.60	0.03	10.43	QP
2	0.161	22.96	-32.47	55.43	12.50	0.03	10.43	Average
3	0.172	43.26	-21.60	64.86	32.79	0.04	10.43	QP
4	0.172	21.96	-32.90	54.86	11.49	0.04	10.43	Average
5 *	0.598	38.00	-18.00	56.00	27.91	-0.09	10.18	QP
6	0.598	18.90	-27.10	46.00	8.81	-0.09	10.18	Average
7	1.396	34.77	-21.23	56.00	24.80	-0.11	10.08	QP
8	1.396	22.67	-23.33	46.00	12.70	-0.11	10.08	Average
9	2.978	35.63	-20.37	56.00	25.70	-0.13	10.06	QP
10	2.978	23.13	-22.87	46.00	13.20	-0.13	10.06	Average
11	4.092	33.54	-22.46	56.00	23.60	-0.12	10.06	QP
12	4.092	21.44	-24.56	46.00	11.50	-0.12	10.06	Average

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)

3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB μ V/m) = 20 log Emission level (μ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
10. Exploratory radiated emissions testing of handheld and/or body-worn devices shall include rotation of the EUT through three orthogonal axes (X/Y/Z Plane) to determine the orientation (attitude) that maximizes the emissions.

3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

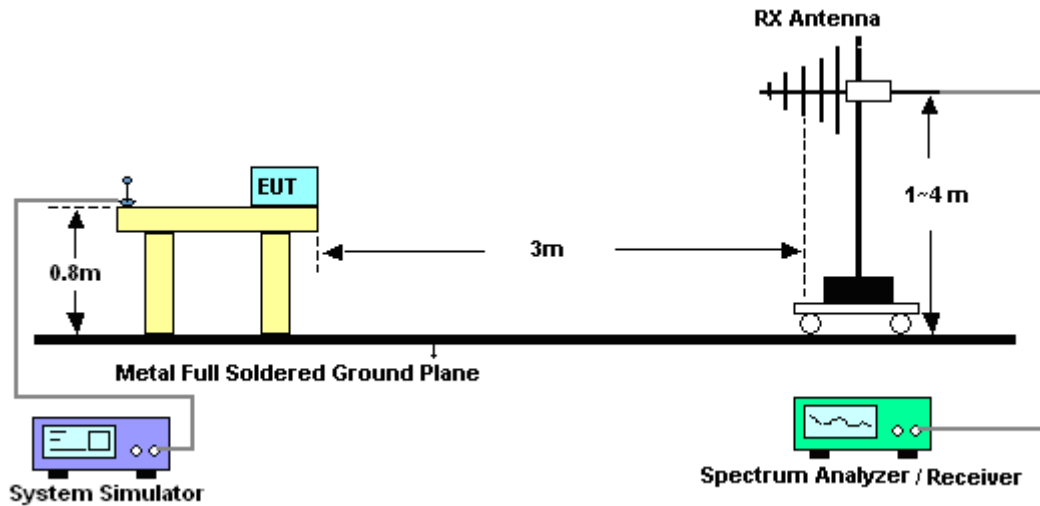


For radiated emissions above 1GHz

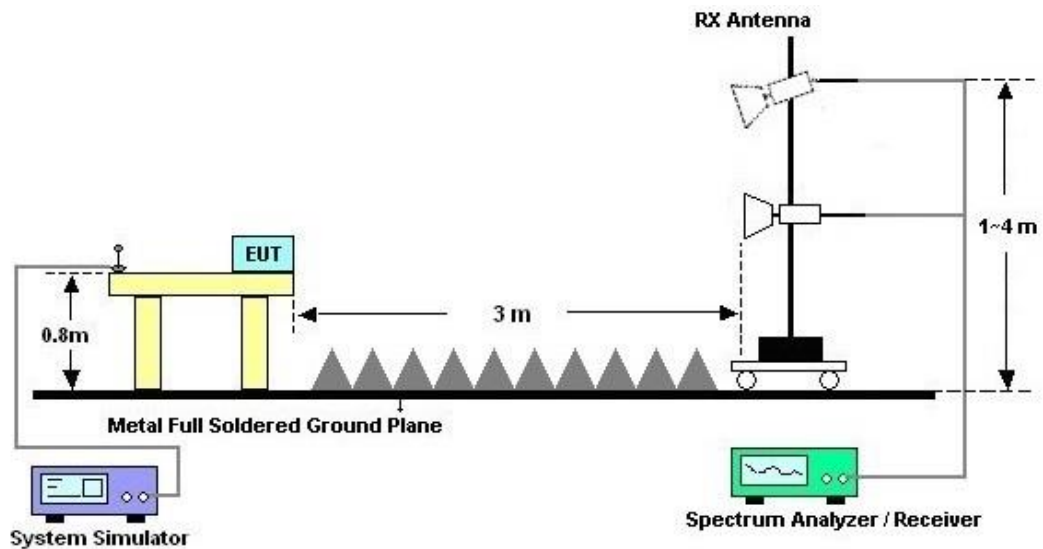



3.2.5. Test Result of Radiated Emission

Test Engineer :	zhuo	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Horizontal
Remark :	#6 is system simulator signal which can be ignored.		

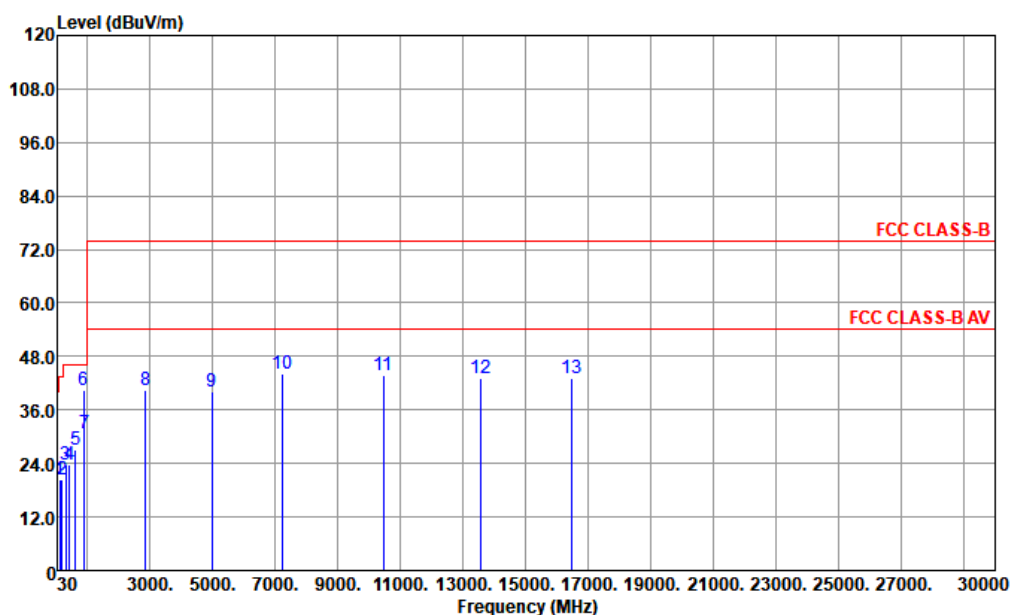


Site : 03CH07-K5

Condition : FCC CLASS-B 3m 3117 SN00240138 HORIZONTAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	108.57	20.36	-23.14	43.50	34.08	16.81	1.51	32.04	---	---	Peak
2	194.90	20.44	-23.06	43.50	35.71	14.66	2.04	31.97	---	---	Peak
3	296.75	23.87	-22.13	46.00	34.23	19.12	2.53	32.01	---	---	Peak
4	415.09	23.89	-22.11	46.00	30.79	22.19	2.97	32.06	---	---	Peak
5	608.12	27.13	-18.87	46.00	30.13	25.68	3.59	32.27	---	---	Peak
6 p	881.66	40.57			38.61	29.05	4.32	31.41	---	---	Peak
7	899.12	30.87	-15.13	46.00	28.71	29.11	4.37	31.32	---	---	Peak
8	2853.00	40.31	-33.69	74.00	64.19	32.51	7.83	64.22	---	---	Peak
9	4978.00	40.19	-33.81	74.00	60.37	34.09	10.54	64.81	---	---	Peak
10	7205.00	44.26	-29.74	74.00	59.81	35.60	12.79	63.94	---	---	Peak
11	10452.00	43.74	-30.26	74.00	53.52	37.45	15.61	62.84	---	---	Peak
12	13546.00	43.05	-30.95	74.00	49.93	38.79	17.65	63.32	---	---	Peak
13	16470.00	43.09	-30.91	74.00	47.93	41.55	19.33	65.72	---	---	Peak



Test Engineer :	zhuo	Temperature :	21~22°C
Test Distance :	3m	Relative Humidity :	41~42%
Remark :	#6 is system simulator signal which can be ignored.		

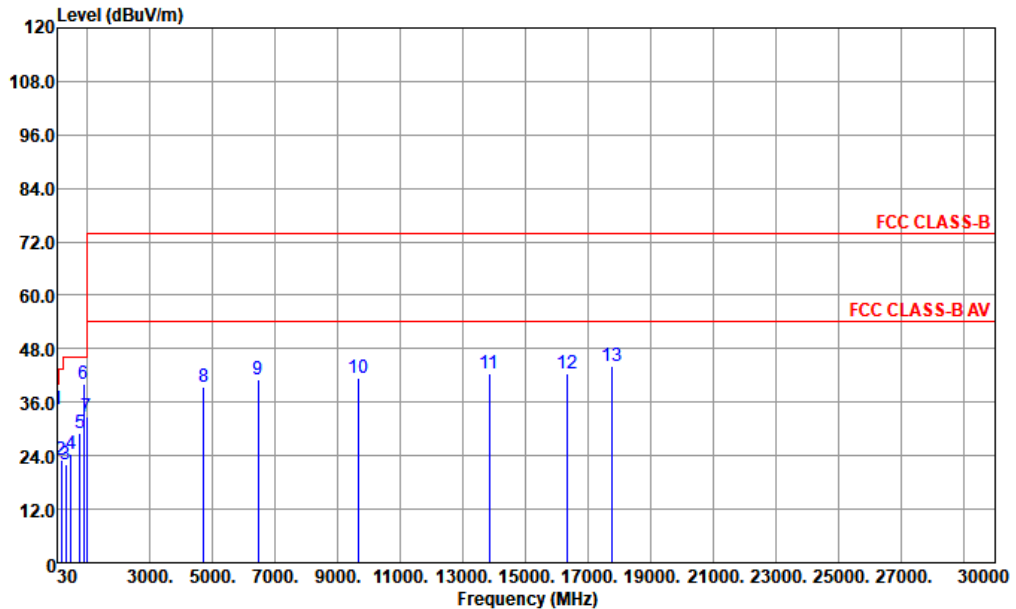

Site : 03CH07-K5
Condition : FCC CLASS-B 3m 3117 SN00240138 VERTICAL

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 p	43.58	34.29	-5.71	40.00	48.28	17.41	0.68	32.08	100	178 Peak
2	151.25	23.11	-20.39	43.50	36.39	16.95	1.78	32.01	---	---
3	311.30	21.95	-24.05	46.00	32.18	19.21	2.58	32.02	---	---
4	466.50	24.32	-21.68	46.00	30.06	23.20	3.15	32.09	---	---
5	746.83	29.06	-16.94	46.00	29.08	28.10	3.98	32.10	---	---
6	881.66	40.18			38.22	29.05	4.32	31.41	---	---
7	959.26	32.89	-13.11	46.00	28.49	30.85	4.50	30.95	---	---
8	4706.00	39.35	-34.65	74.00	60.00	33.90	10.16	64.71	---	---
9	6457.00	41.26	-32.74	74.00	58.42	35.37	11.95	64.48	---	---
10	9670.00	41.38	-32.62	74.00	53.25	36.74	14.77	63.38	---	---
11	13835.00	42.44	-31.56	74.00	49.54	38.73	17.87	63.70	---	---
12	16334.00	42.61	-31.39	74.00	47.62	41.33	19.24	65.58	---	---
13	17762.00	44.10	-29.90	74.00	48.06	41.26	20.23	65.45	---	---

Note:

- Level(dBμV/m) = Read Level(dBμV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 24, 2022	May 17, 2023	May 23, 2023	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2022	May 17, 2023	Oct. 12, 2023	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 24, 2022	May 17, 2023	May 23, 2023	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2022	May 17, 2023	Oct. 11, 2023	Conduction (CO01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max 30dBm	Oct. 12, 2022	May 15, 2023	Oct. 11, 2023	Radiation (03CH07-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz~44G,MAX 30dB	Oct. 12, 2022	May 15, 2023	Oct. 11, 2023	Radiation (03CH07-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz~1GHz	Aug. 26, 2022	May 15, 2023	Aug. 25, 2023	Radiation (03CH07-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00240132	1GHz~18GHz	Jul. 08, 2022	May 15, 2023	Jul. 07, 2023	Radiation (03CH07-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Oct. 17, 2022	May 15, 2023	Oct. 16, 2023	Radiation (03CH07-KS)
Amplifier	EM	EM18G40GGA	060851	18~40GHz	Jan. 05, 2023	May 15, 2023	Jan. 04, 2024	Radiation (03CH07-KS)
Amplifier	SONOMA	310N	413741	9KHz~1GHz	Jan. 05, 2023	May 15, 2023	Jan. 04, 2024	Radiation (03CH07-KS)
Amplifier	EM	EM01G18GA	060834	1Ghz~18Ghz	Oct. 12, 2022	May 15, 2023	Oct. 11, 2023	Radiation (03CH07-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	May 15, 2023	NCR	Radiation (03CH07-KS)
Turn Table	EM	EM 1000-T	N/A	0~360 degree	NCR	May 15, 2023	NCR	Radiation (03CH07-KS)
Antenna Mast	EM	EM 1000-A	N/A	1 m~4 m	NCR	May 15, 2023	NCR	Radiation (03CH07-KS)

NCR: No Calibration Required

5. Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.94dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)-03CH07-KS

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.20dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)-03CH07-KS

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.86dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)-03CH07-KS

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.24dB
---	--------